

# How To Build A Broad-Band 5-Element, 20 Meter Yagi

At some point in every amateur's life there comes a time to step up and away from the rest of the crowd. W6NGZ presents us with a project that will let you do just that.

BY JACK REEDER\*, W6NGZ

**A**s a long-time antenna experimenter, builder, and designer, I decided it was about time to try my luck at using the computer to come up with an antenna that would be guided by principles that would eliminate some of the guesswork.

My first step was to obtain the software program YAGIMAX<sup>1</sup> written by Lew Gordon, W4VX. It's an easy program, because it's user friendly. It allows you to design and stack Yagies and run graphics, but you must use dimensions that are realistic when you are designing.

Since I was using a homebrew 4-element, 20 meter Yagi on a 35 foot boom, I decided to design a 4-element beam, using a boom length of 40 feet. Forty foot, 3 inch diameter aluminum irrigation pipe is readily available and quite inexpensive.

I spent many hours trying every spacing arrangement and element length possible. These designs had reasonably good gain,

Freq. (MHz)	Gain (dBi)	F/B (dB)	Impedance (ohms)	VSWR	Radiation Resistance
14.000	10.04	20.09	30.35-j8.71	1.32	32.9
14.020	10.07	21.01	30.46-j7.99	1.29	32.5
14.040	10.09	22.03	30.53-j7.23	1.26	32.2
14.060	10.12	23.19	30.56-j6.45	1.23	31.9
14.080	10.14	24.52	30.56-j5.62	1.19	31.6
14.100	10.17	26.10	30.56-j4.77	1.16	31.3
14.120	10.20	28.02	30.55-j3.88	1.13	31
14.140	10.22	30.50	30.55-j2.96	1.10	30.9
14.160	10.25	33.98	30.58-j2.03	1.06	30.7
14.180	10.28	39.84	30.65-j1.10	1.03	30.7
14.200	10.30	47.29	30.77-j.18	1.00	30.8
14.220	10.32	40.68	30.95+j.69	1.03	31
14.240	10.35	34.54	31.20+j1.49	1.06	31.3
14.260	10.36	31.05	31.53+j2.18	1.08	31.8
14.280	10.38	28.65	31.91+j2.70	1.10	32.1
14.300	10.39	26.85	32.32+j2.99	1.12	32.7
14.320	10.40	25.46	32.71+j2.97	1.12	33
14.340	10.41	24.37	32.97+j2.57	1.12	33.2
14.360	10.41	23.53	32.94+j1.75	1.10	33
14.380	10.40	22.92	32.40+j.52	1.06	32.4
14.400	10.40	22.53	31.09-j.96	1.03	31.1

Table 1— Characteristics plotted for the 5-element 20 meter Yagi antenna.

\*1331 N. Abrego Dr., Green Valley, AZ 85614  
<sup>1</sup>YAGIMAX, by Lew Gordon, K4VX, P.O. Box 105, Hannibal, MO 63401


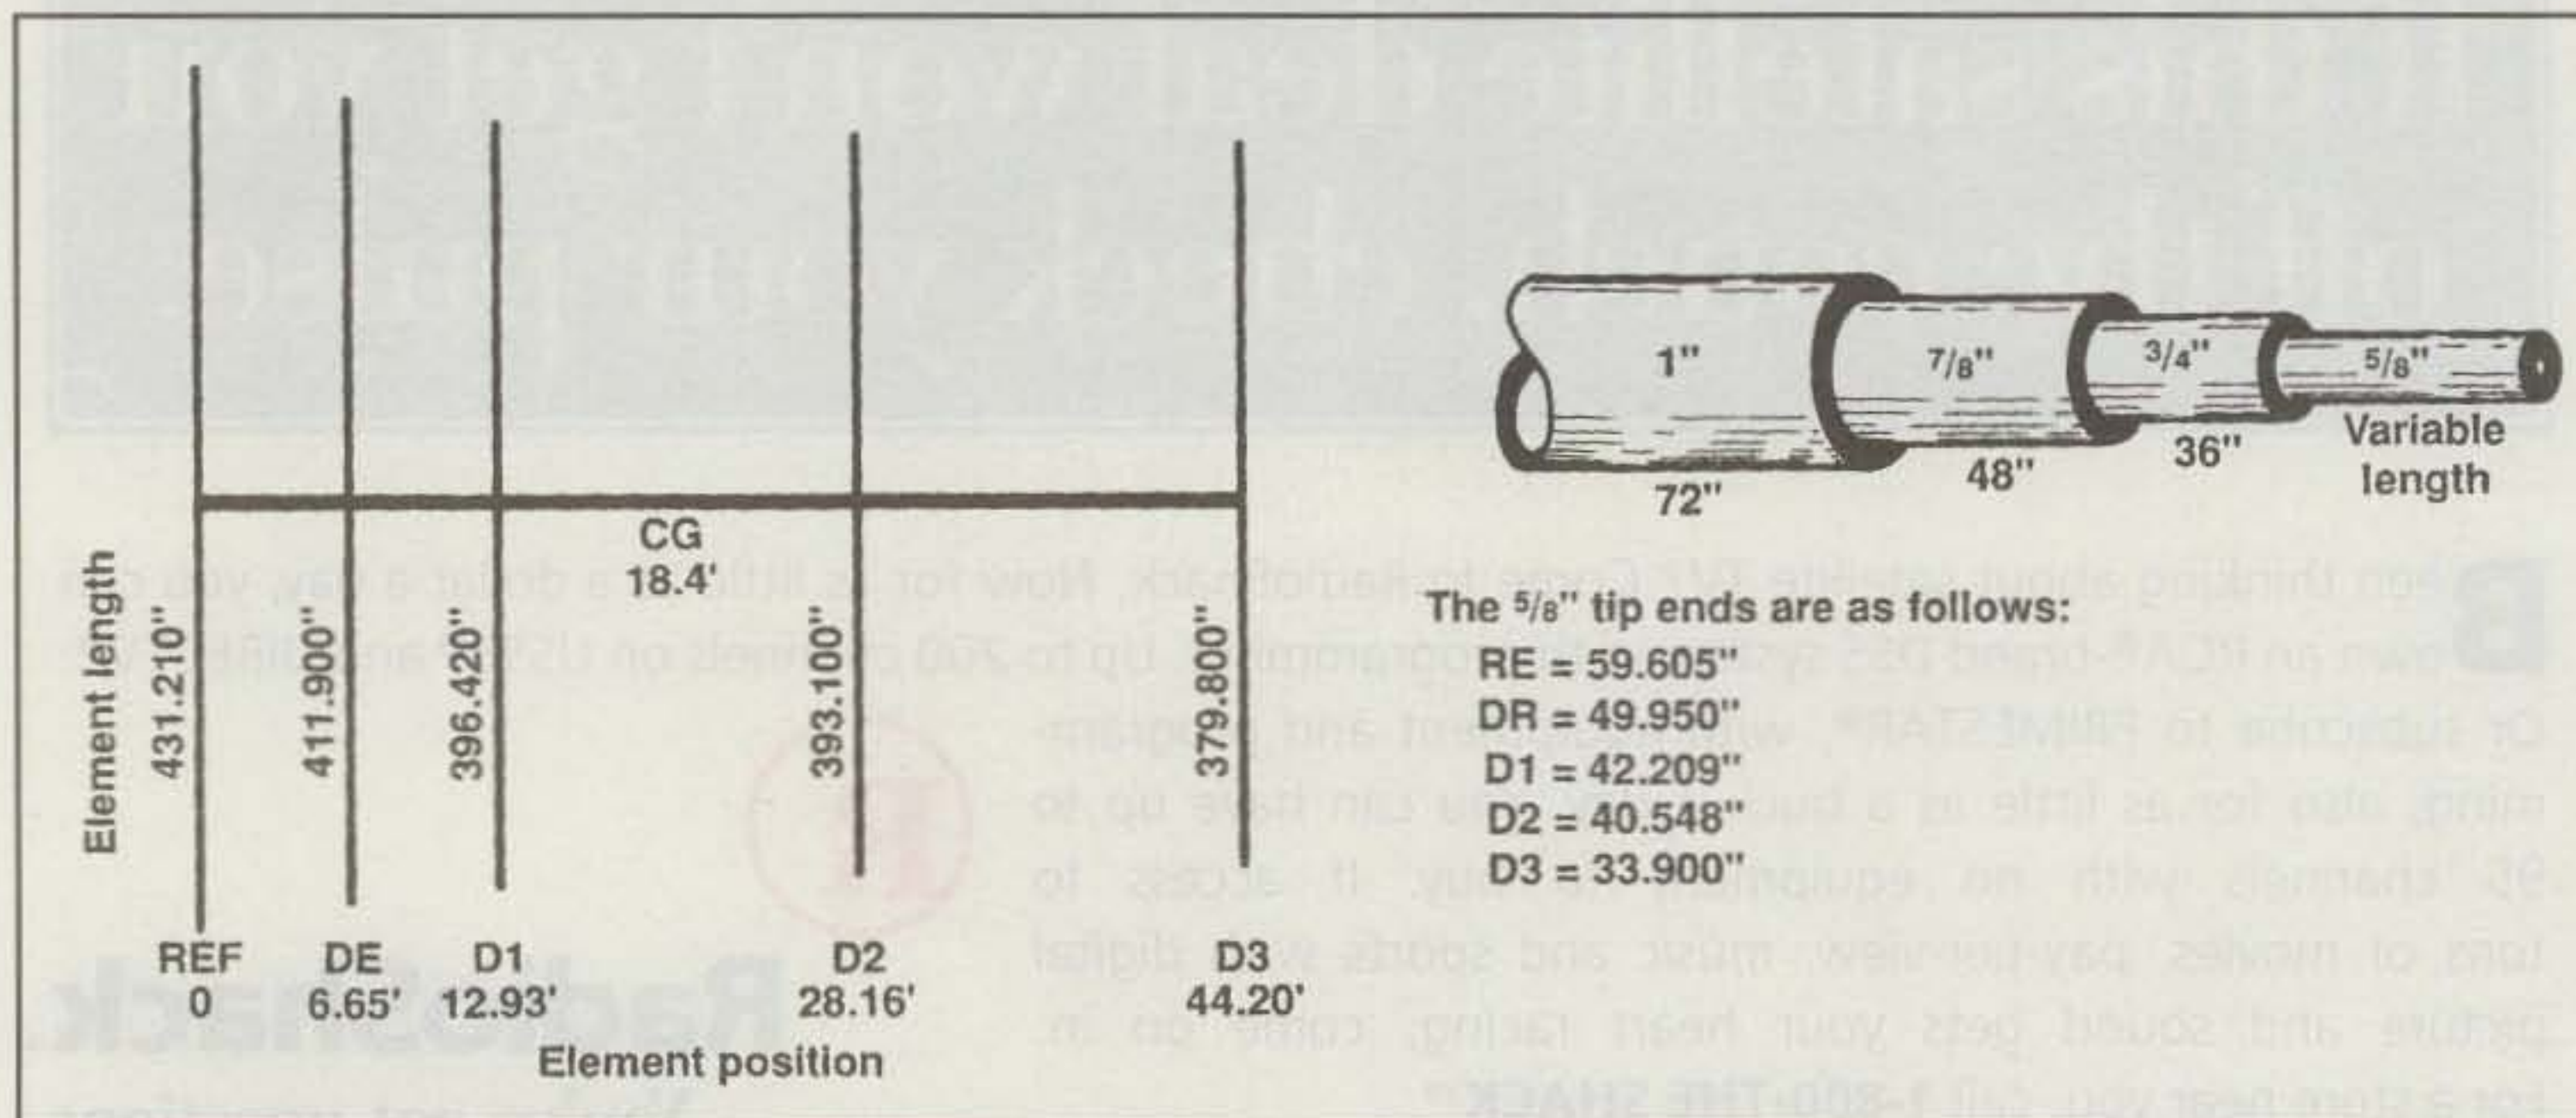


Fig. 1— Physical dimensions and spacing for the antenna. CG refers to the center of gravity. (See text for construction details.)



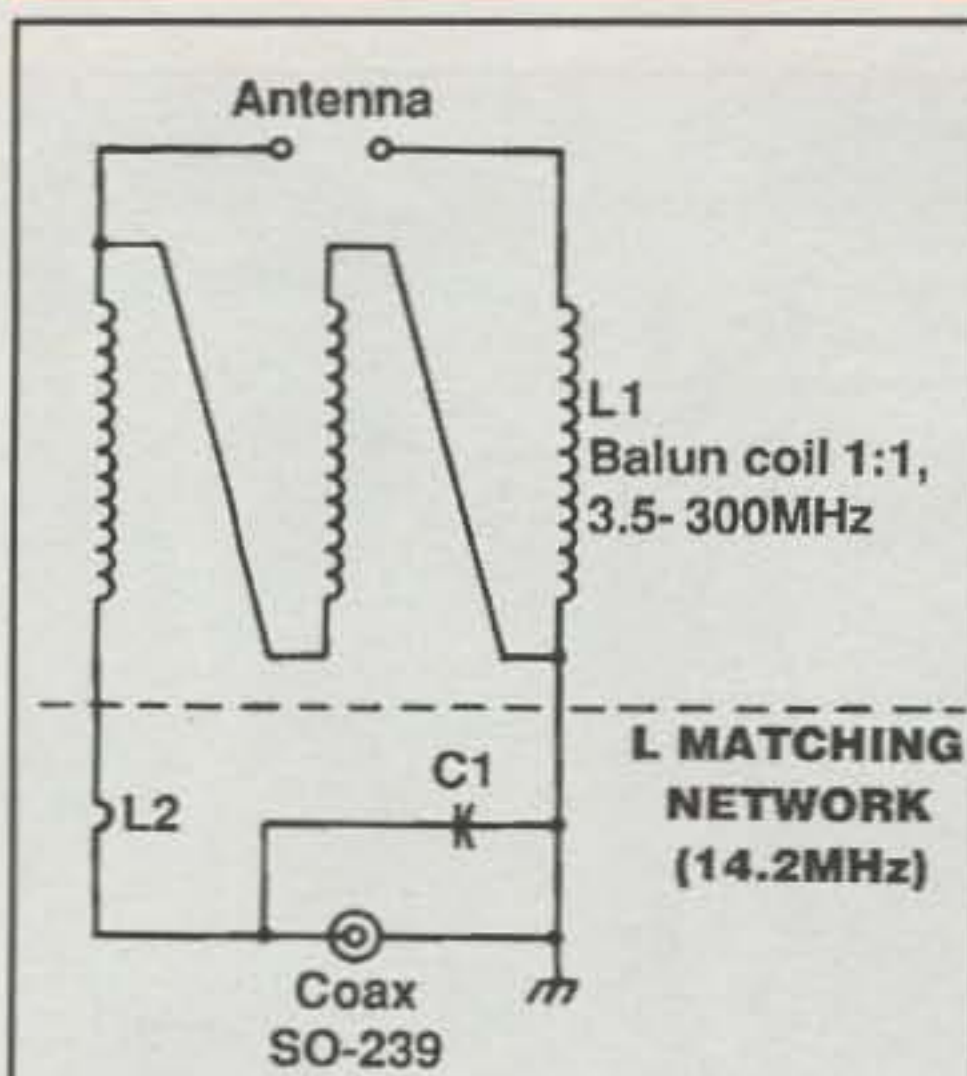

**NOTES:**

- L1 = 12 turns #14, formvar, 1 1/4" dia PVC
- L2 = 1 turn #14, formvar, 1 1/4" dia PVC
- C1 = 1000V fixed mica (capacitor value as required)

Fig. 2- Schematic diagram for the balun and L matching network.

although the FB and SWR left something to be desired. Out of desperation I added a fifth element, placing it at a very unconventional spot between the reflector and driven element. The added element was now the driven element, and we had very close spacing between reflector, driven element, and director #1. This was a bit of luck, and I could tell on my trusty PC I was really on to something good.

Within a few minutes the 5-element Yagi was completely designed. I also designed a 5-element on a 42 foot boom. Both of these 20 meter designs have excellent FB and the SWR is better than 1:1.3 over the entire 20 meter band.

I completed these designs in November 1991. A short time later I mailed the hard copies to Lew Gordon, who placed the designs in YAGIMAX software. I am pleased to have these designs in YAGIMAX, and they are designated 520NGZ40.inp and 520NGZ42.inp.

A few of these designs were built, and many similar designs began to appear using spacings R-DE-D1 of .15 to .18 WL. The physical size and performance are very close to the computer calculations. These designs using this close spacing are becoming popular and are being accepted at this date.

In November 1994, with a new 486 computer and the latest YAGIMAX software #337, I worked on new designs with boom lengths of 40 to 50 feet for 20 meters (.58 to .7 WL). I hit on a design with a boom length of 44.2 feet (.64 WL) that really caught my attention. Table I shows calculations for gain, FB, impedance, VSWR, and radiation resistance. The radiation resistance (impedance) of this Yagi only varies between 30.7 and 33.2 ohms. This is only 2.5 ohms variation over the entire 20 meter band, which makes for an easy match and very low SWR. Note in Table I the FB is better than 20 dB over the bandwidth and peaks at approximately 60 dB. It is truly a broadband Yagi.

# PETER DAHL CO.

## Heavy Duty Components FOR THE SERIOUS HAM

Hipersil Plate & Filament Transformers, High Voltage Rectifiers, DC Filter Chokes & Capacitors, Vacuum Variables, Roller Inductors, RF Plate & Filament Chokes.

Write or FAX for an extensive catalog

5869 Waycross Avenue TEL:(915)751-2300  
El Paso, Texas 79924 FAX:(915)751-0768  
<http://www.leagle1.com/commercial/pwdco/> E MAIL: [pwdco@leagle1.com](mailto:pwdco@leagle1.com)



CIRCLE 68 ON READER SERVICE CARD



**CABLE CONVERTER DIAGNOSTIC TEST CHIP**  
**LOADS FULL ACTIVATION OF CABLE CONVERTER**

WE STOCK A COMPLETE LINE OF MICROPROCESSOR CHIPS  
WIRELESS QUICK INSTALL TEST BOARDS, SECURITY TOOLS  
AND DIAGNOSTIC TRANSMITTERS. " CUBES " LOWEST PRICE

MON-FRI 8AM TIL 7PM EST. [HTTP://WWW.AMERICANINTERNET.COM/GOCABLE](http://WWW.AMERICANINTERNET.COM/GOCABLE) ESTABLISHED 1976

**\*SPECIAL DISCOUNT TO AMATEUR RADIO FOLKS, GIVE US YOUR STATION CALL**

**VISUAL COMMUNICATIONS INC.**  
**FOR ORDERS 1-800-GO-CABLE**

CATALOG & TECH. SUPPORT 717-620-4363 SORRY NO PA SALES  
\*\*\* ANYONE IMPLYING ILLEGAL USE WILL BE DENIED SALE, WE SELL OUR \*\*\*  
PRODUCTS TO QUALIFIED BENCH TECHNICIANS, OR FCC LICENSED  
AMATEUR RADIO OPERATORS AND CABLE REPAIR TECHNICIANS ONLY!!

CIRCLE 95 ON READER SERVICE CARD



## TOWERS & HAZER

**You NEED the HAZER** The Hazer is a unique tram that rides up & down the outside of your Martin tower. Hazer 2, 3, 4, 5, 6 wrap around the tower, Hazer 7 incorporates it's own separate track. Raise and lower your antennas by simply turning a winch crank! Bottom shelf holds rotor, top shelf the thrust bearing to stabilize mast.

**COMPLETE TOWER PACKAGES** INCLUDE 10-FOOT TOWER SECTIONS, HINGED BASE FOR WALK UP ERECTION, HAZER, KEVLAR GUY WIRE KIT, PREMIUM THRUST BEARING, 10-FOOT MAST AND EARTH GROUND.

**ALL YOU ADD IS CONCRETE, YOUR ROTATOR AND ANTENNAS!**

ORDER #	TOWER PACKAGE	FREIGHT PREPAID
M1330A 30'	12 sq ft, 85 MPH w/Hazer 5	\$1539.56
M1340A 40'	12 sq ft, 85 MPH w/Hazer 5	\$1744.56
M1840A 40'	16 sq ft, 85 MPH w/Hazer 6	\$2047.64
M1850A 50'	16 sq ft, 85 MPH w/Hazer 6	\$2292.64
M1860A 60'	15 sq ft, 85 MPH w/Hazer 7	\$3195.00
M1870A 70'	15 sq ft, 85 MPH w/Hazer 7	\$3485.00


**H-5 HAZER**  
cranked near top of M1330A Martin tower. →

\*\*\*\* HAZERS FOR ROHN 20/25G TOWERS: \*\*\*\*

CAT #	MAX LOAD	WIND ABILITY	MADE OF	UPS PPD
H-2	175 Lbs	12 Sq Ft	Aluminum	\$339.95
H-3	150 Lbs	8 Sq Ft	Aluminum	\$245.95
H-4	200 Lbs	16 Sq Ft	Galv. Steel	\$326.95

**816-882-2734**

<http://www.glenmartin.com>  
Boonville, Mo.

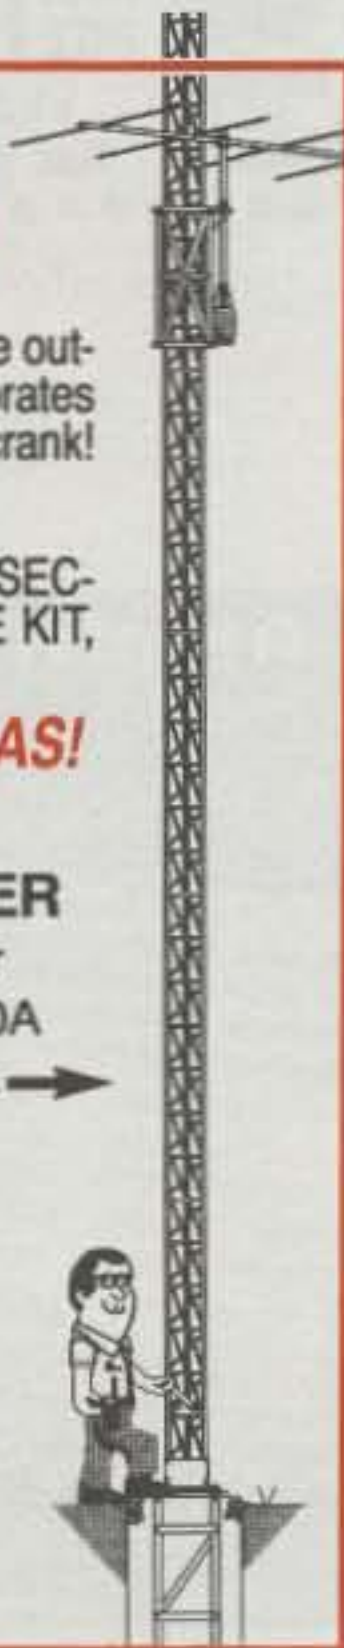

CIRCLE 560 ON READER SERVICE CARD



The physical dimensions are shown in fig. 1. Should you construct this Yagi and use elements of a different diameter, the taper will have to be calculated to arrive at the correct element lengths. All the elements are built the same length except for the 5/8 inch tip ends shown in the lower portion of fig. 1. The overall element lengths are also shown in fig. 1, as are the spacing dimensions.

To construct the Yagi use aluminum plates and U-bolts. They work quite well. The plate size should be 3/8 inch thick, 5 1/2 inches wide, and 7 inches long. These plate dimensions were used in the taper calculations. You may use your choice of the feed and matching systems; hairpin, gamma, and T-match are all acceptable. If you choose to use the hairpin match, the driven element should be shortened by approximately 2 1/2 inches to obtain a negative reactance required for the hairpin match.

This design has been checked out on another software analyzer program. The dimensions are very very close to those shown in fig. 1.

I use a split driven element with a homebrew balun and L circuit to match the Yagi (see fig. 2). These are two separate circuits: a trifilar (three wires wound parallel) air balun 1:1 that covers 3.5 to 30 MHz, and an L circuit, which

is a different matter. This circuit matches the 50 ohm coax feed line to the 30 ohm Yagi. The balun is wound on PVC pipe, 1 1/4 inch OD. The L-circuit one-turn coil (shown in fig. 2, L2) should also be wound on the same pipe. Start the turn at 1 inch below the end of the balun and reverse the windings in the opposite direction from the winding of the balun. This L circuit is frequency limited, but is plenty broad enough to cover the 20 meter band.

The L circuit along with the balun can now be adjusted to match the antenna's impedance. This can be done at the workbench. Place a 30 ohm noninductive resistor across the balun output. Use a variable capacitor with short leads in the circuit, shown in fig. 2, C1. Dip the capacitor while feeding the circuit with your transceiver using only very low power—approximately 1 watt—to prevent blowing the resistor. The dip will occur on your transceiver SWR meter. The transceiver must be set at the antenna design frequency while running this test. With your test meter, check the capacity of the variable capacitor. Next solder a fixed mica capacitor of the same capacity in the L circuit. The fixed capacitor should be rated at 1000 volts. I have found that by using a small variable capacitor (3-340PF) instead of the



The completed balun is shown on the left just prior to encapsulation. The unit is housed and protected in PVC as shown on the right.

fixed capacitor, the L circuit is much better and easier to adjust. Use a variable capacitor with a screwdriver slot and drill a small hole in the PVC to adjust the capacitor.

I have used this feed system for a number of years and like it very much. The insertion loss of the balun and L circuit has been tested with two baluns and L circuits attached together back to back, measuring the loss with a Bird wattmeter into a 50 ohm dummy load. The result is divided by two, which gives the correct insertion loss of one balun. This was found to be .16 dB for 20 meters.

The balun and L circuit may be placed in PVC pipe and sealed (see photo). The photo shows the balun and L circuit prepared to be placed in the 2 inch PVC pipe. Also shown is the completed circuit sealed in the pipe. Coax fitting SO-239 is placed on the outside of the pipe cap using four 6-32 screws and nuts. Solder the circuit to the coax connector. Solder two braided wires, 12 inches long, to the output of the balun. Drill two small holes in the other PVC end cap. Slip the balun inside the pipe and glue the cap in place. Pull the two braided wires through the holes in the other cap. Glue this cap in place. Now pull the slack tight on the two braided wires. Any excess length of the two wires can be trimmed off when attaching the balun to the antenna. Place silicone around the coax fitting and the two holes where the braided wire passes through the cap. Let the silicone dry for several hours.

How does this antenna perform? Just like the computer predicted—broad band, low SWR, excellent FB, and good gain. The Yagi checks out about the same as Table I illustrates.

I have always been fascinated by antennas and have built tribanders, log Yagis, delta loops, quads, and stacked quads. However, I always return to the monoband Yagi. In the past it was a lot of guesswork and a lot of adjusting, but now the computer eliminates all the guesswork. Build this Yagi. You're sure to like it! ■

**WORLD'S BEST SELLING**  
**AMATEUR RADIO LICENSE**  
**COMPUTER-AIDED**  
**INSTRUCTION SOFTWARE**  
**\$39<sup>95</sup>** PLUS \$3 SHIPPING

Learn at your IBM/compatible PC! Eight 3 1/2" and 5 1/4" disks cover all written and Morse code exams - Novice through Extra. Review all 2,000 questions, take sample exams, learn Morse code, build telegraphy speed ...and more!  
**Free bonus! Complete Part 97 FCC Rule Book!**

MasterCard TOLL FREE **1-800-669-9594**  
 VISA **W5YI Group, Inc.**  
 Box 565101, Dallas, TX 75356

CIRCLE 117 ON READER SERVICE CARD

**NO ENTERTAINMENT FEE**

That's right. There's never an entertainment charge at the **Solder-It Booth (Pacificon, Scottsdale, Boxboro)**. Come and see for yourself why the reviewers agree that the Solder-It Kit makes soldering PL-259s, miniature connectors, aluminum, and so many other nasty soldering jobs so easy. Last year at Dayton we had a lineup of folks who needed emergency soldering jobs... Monel eyeglass frames for a fellow from Kenwood, a clasp on a gold bracelet for a YL ham from NJ, a few PL-259s, din plugs and other connectors for new rig owners, a cracked HTcase, a pot metal toy gun for a budding cowpoke. One woman fixed a hole in her truck radiator so she could get home. **THIS IS EASY!**

The Solder-It Kit is still \$59.00 + \$5.00 S&H (Ohio add 7%)  
 Check, VISA, MC to Solder-It Box 20100 Cleveland, OH 44120  
 (800)897-8989 FAX (216)721-3700 <http://www.solder-it.com>

CIRCLE 88 ON READER SERVICE CARD

**Amplifiers, ATU Down Converters & Hard to Find Parts**

**LINEAR AMPLIFIERS**

HF Amplifiers  
 PC board and complete parts list for HF amplifiers described in the Motorola Application Notes and Engineering Bulletins:

AN779H (20W)	AN 758 (300W)
AN779L (20W)	AR313 (300W)
AN 762 (140W)	EB27A (300W)
EB63 (140W)	EB104 (600W)
AR305 (300W)	AR347 (1000W)

2 Meter Amplifiers (144-148 MHz)  
 (Kit or Wired and Tested)

35W - Model 335A,	\$79.95/\$109.95
75W - Model 875A,	\$119.95/\$159.95

440-450 MHz Amplifiers  
 (SSB-FM-ATV) 100W - Model KEB 87, \$159.95

**HARD TO FIND PARTS**

- RF Power Transistors
- Broadband HF Transformers
- Chip Caps - Kemet/ATC
- Metalclad Mica Caps - Unelco/Semco
- ARCO/SPRAGUE Trimmer Capacitors

We can get you virtually any RF transistor!  
 Call us for "strange" hard to find parts!  
**DIGITAL FREQUENCY READOUT**  
 For older analog transceivers  
 TK-1 (Wired and Tested) \$149.95

**ATU Down Converters**  
 (Kit or Wired and Tested)

Model ATV-3 (420-450) (Ga AS - FET)	\$49.95/\$69.95
Model ATV-4 (902-926) (GaAS - FET)	\$59.95/\$79.95

**ADDITIONAL ITEMS**

- Heat Sink Material
- Model 99 Heat Sink (6.5" x 12" x 1.6"), \$24
- CHS-8 Copper Spreader (8" x 6" x 3/8"), \$24
- Low Pass Filters (up to 300W) for harmonics \$12.95
- Specify 10M, 15M, 20M, 40M, 80M or 160M
- HF Splitters and Combiners up to 2KW

For detailed information and prices, call or write for our FREE catalog!

Phone (513) 426-8600  
 FAX (513) 429-3811  
**CCI Communication Concepts Inc.**  
 508 Millstone Drive • Beavercreek, Ohio 45434-5840

CIRCLE 24 ON READER SERVICE CARD