

# Service Technical Information

MODEL NO. XP-R210/SP910/SP911/V713/V714/V715J/V716C/V510/V511 V512/V513/V514/V516C/V410/V411/V412/V416C/SR311
SUBJECT Change of the PICK UP Mechanism

REF.No. :G - A0 - 059 - E0

DATE :06. SEP. 2000

## Quick Information

### <CONTENTS>

New PICK UP Mechanism(DAA23LN) is used in the above models of which production is under way.

Pay attention to the following points when repairing the PICK UP Mechanism, since the two types are not compatible with each other.

### <COUNTERMEASURE>

Situation:


- The pickup mechanism is changed from DA23L to DA23LN.
- The pickup mechanism of only the target models is changed.
- The microcomputer is also changed because of the change of the pickup mechanism.
- A new microcomputer is exclusively used for the new pickup mechanism (DA-23LN).
- The period of production varies depending on the model.

The new pickup mechanism and microcomputer are mounted in models that will be produced in a period from September to November approximately.

Identifying new PICK UP Mechanism :

- A new type of PICK UP Mechanism will be mounted on a product carrying an "(A)" indication on the SPEC LABEL.

Example:

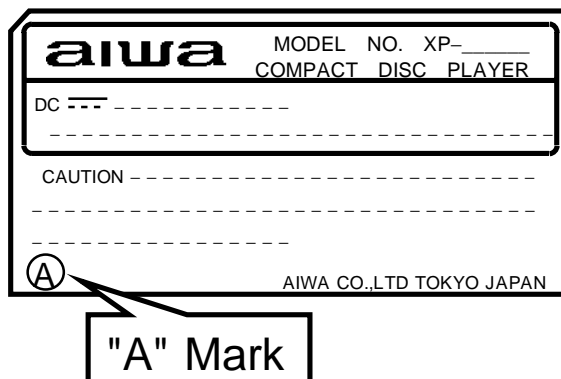

Service Manual :

- A Service Manual for the currently-used PICK UP Mechanism(DA23L) has already been released.
- A Service Manual for a new PICK UP Mechanism will be released in October, 2000.

Notes on repair :

- Check the SPEC LABEL for the suitable Service Manual.
- No change has been made in the CD TEST MODE.