

FEATURES

- 256-channel, charge-to-digital conversion on a single chip
- 16-bit resolution with no missing codes
- Simultaneous sampling
- User adjustable full-scale range up to 32 pC
- Down to 22 μ s line time
- Ultralow noise: 560 e⁻ at 2 pC range
- INL \pm 2.5 LSB or 57.5 ppm, ADC included
- Multiple functional power modes: 1 mW/channel to 3 mW/channel
- Multiple power-down and sleep modes: down to 0.005 mW/channel
- Measurement of electron or hole collected charge
- Tested and delivered on high density system on flex (SOF)
- LVDS/CMOS self-clocked serial interface
- SPI daisy-chain configuration registers
- On-board AFE timing sequencer
- On-board temperature sensor and reference buffer

APPLICATIONS

- Digital X-ray panel
- Photodiode sensors array
- CT scanner
- High channel count, data acquisition systems (current or voltage input)

GENERAL DESCRIPTION

The ADAS1256 is a 256-channel, 16-bit, digital X-ray analog front end (AFE) that integrates the complete charge-to-digital conversion signal chain on a single chip. It enables a wide range of digital X-ray modalities, including portable radiology and mammography as well as high speed fluoroscopy and cardiac imaging. The ADAS1256 is delivered on a high density system-on-flex (SOF) package that can be directly mounted on a digital X-ray panel.

All converted channel results are output on a single LVDS self-clocked serial interface that significantly reduces external hardware.

An SPI-compatible serial interface allows configuration of the AFE, using the SDI input. The SDO output allows the user to daisy-chain several AFEs on a single 3-wire bus.

An integrated AFE timing sequencer controls the sampling activity of the analog front end (AFE). The sequencer is programmed via the SPI port and is timed by a single clock, ACLK.

FUNCTIONAL BLOCK DIAGRAM

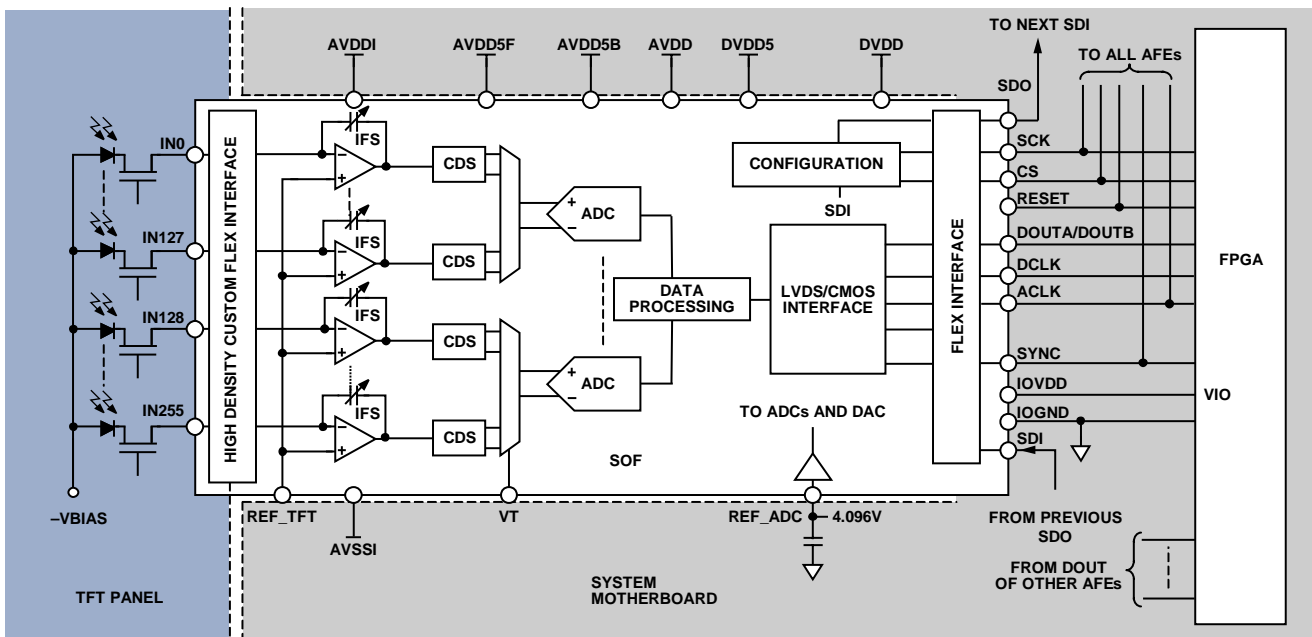


Figure 1.

Rev. Sp0

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
 Tel: 781.329.4700 ©2012 Analog Devices, Inc. All rights reserved.
[Technical Support](#) www.analog.com

NOTES