

G1000[™]

*audio panel pilot's guide
supplement for Mooney
M20M & M20R*

Record of Revisions

Revision	Date of Revision	Revision Page Range	Description
A	5/03/05	6B-1	Initial release.

This document highlights G1000 Audio Panel (GMA 1347) information specific to Mooney M20M and M20R aircraft. It supersedes related information in the G1000 Audio Panel Pilot's Guide.



NOTE: For a complete description of the GMA 1347, refer to the *Garmin G1000 Audio Panel Pilot's Guide*.

HEADSET JACKS & KEYED ICS OPERATION

Mooney aircraft are equipped with four (4) stereo headset jacks (pilot, copilot and two passengers).

Keyed ICS operation is not available on Mooney aircraft.

DISABLED FUNCTIONS

In factory-equipped Mooney aircraft the following audio functions are disabled: AUX audio, TEL, COM3 MIC and COM3 capability.

Pressing the function keys does not light the corresponding annunciator.



NOTE: The use of split COM (COM 1/2 key) is not recommended in Mooney aircraft.

COCKPIT VOICE RECORDER (CVR)

Mooney aircraft are not factory-equipped with a cockpit voice recorder.

AIRCRAFT ENTERTAINMENT INPUTS

In Mooney aircraft entertainment channels MUSIC 1 and MUSIC 2 are connected together.

DUAL PANEL OPERATION

Mooney aircraft are not configured for dual audio panel installations.

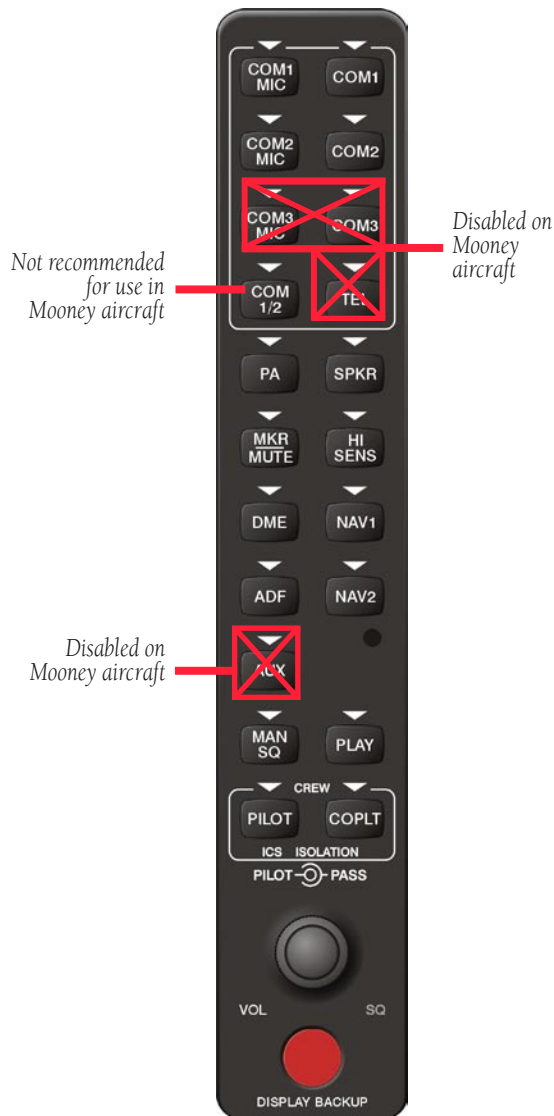


Figure 6B.1.1 G1000 Audio Panel (GMA 1347)



Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062, U.S.A.
p: 913.397.8200 f: 913.397.8282

Garmin AT, Inc.
2345 Turner Road SE
Salem, OR 97302, U.S.A.
p: 503.391.3411 f: 503.364.2138

Garmin (Europe) Ltd.
Unit 5, The Quadrangle
Abbey Park Industrial Estate
Romsey, SO51 9DL, U.K.
p: 44/0870.851241 f: 44/0870.851251

Garmin Corporation
No. 68, Jangshu 2nd Road
Shijr, Taipei County, Taiwan
p: 886/2.2642.9199 f: 886/2.2642.9099

www.garmin.com