

J2118 Double Balanced Mixer

2.0 to 18.0 GHz

Technical Characteristics



Product Features
Multi-octave bandwidth
Broad frequency - input and output
Wide DC to IF frequency response
Low conversion loss
High port-to-port isolation

Maximum Ratings	
Storage Temperature	-65 to +150°C
Operating Temperature Peak	-55 to +125°C
Peak Input Power For Any Single Port	+23dBm Peak
Peak Input Power For Any Port	+26dBm peak
Peak Input Current @ +25° C	100mA


Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Conversion Loss						
RF Input	2.0 to 18.0		6.0	8.5	dB	IF = 100 MHz
LO Input	2.0 to 18.0		6.0	7.8	dB	IF = 200 MHz
IF Output	DC to 0.5		6.5	8.5	dB	IF = 500 MHz
Conversion Flatness						
Isolation						
LO-RF	2.0 to 18.0	18.0	25.0		dB	
LO-IF	2.0 to 18.0	20.0	35.0		dB	
RF-IF	DC to 0.5	20.0	25.0		dB	
VSWR						
1dB Comp.Point						
J2118L			1.0		dBm	
J2118M			4.0		dBm	
LO Drive						
J2118L			7.0		dBm	
J2118M			10.0		dBm	
Input TOIP						
J2118L			10.0		dBm	RF1: 9.0 GHz @ -10dBm
J2118M			14.0		dBm	

NOTES:

1. Measured in a 50 ohm system with nominal LO drive and downconverter application only, unless otherwise specified. The I-port frequency range extends to DC for phase detection, pulse modulation, or attenuator applications. I-port VSWR degrades from a 50 Ω system at LO-IF frequencies.

2. Typical values are measured at +25°C and are not guaranteed.

Package outline Z

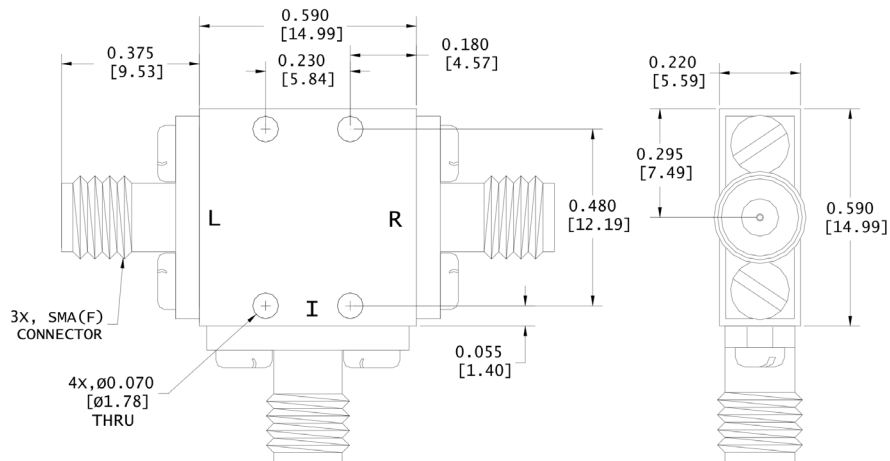


DISCLAIMER: Subject to change without notice.

J2118 Double Balanced Mixer


2.0 to 18.0

Outline Drawings 1 of 2

Coaxial Package outline 'B'

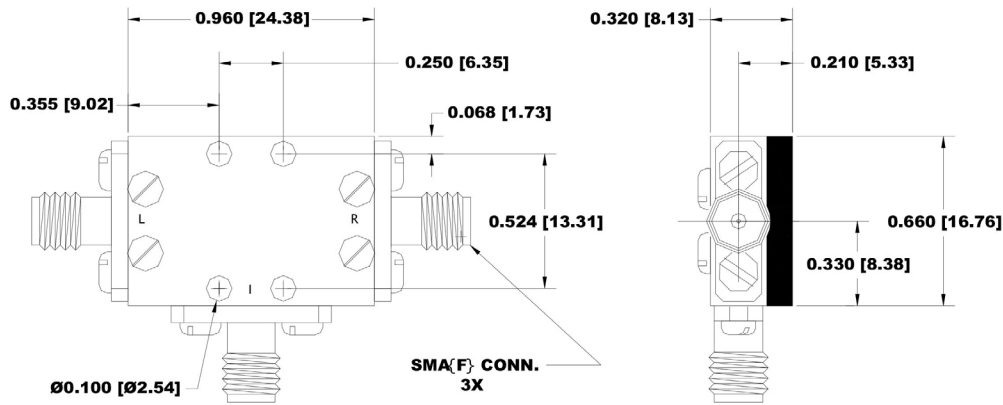

Coaxial Package outline 'L'

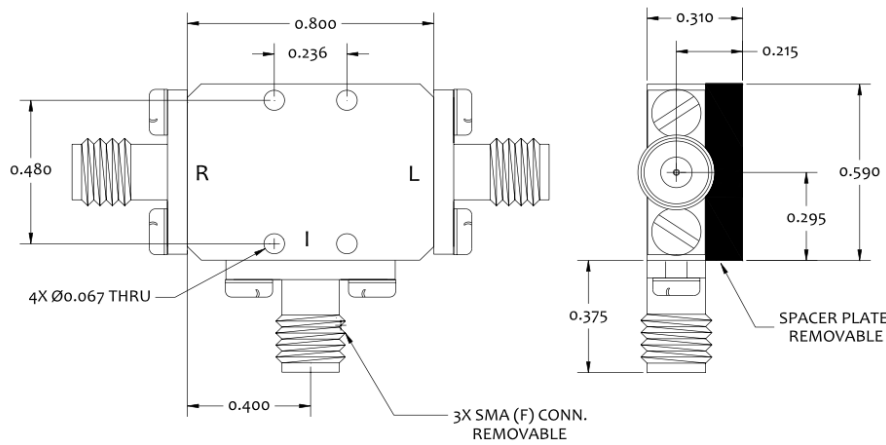

Coaxial Package outline 'C'

