


# ACLM-4601

## Pin Diode Limiter

### Features:

- Built to protect sensitive circuit elements such as receiver front ends or detectors.
- Reduce high power inputs to a low level that can be tolerated by the next component.
- Handle up to 100W peak power levels and cover the frequency range from 100MHz to 26GHz.
- Custom models with higher power handling are available.

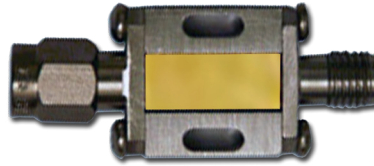

### Specifications:

Parameter	Specification	Units
Frequency Range (min)	0.5 – 18	GHz
Peak Input Power (max)	100	W
CW Input Power (max)	1	W
Peak Flat Leakage (max)	21	dBm
CW Flat Leakage (max)	18	dBm
Insertion Loss (max)	1.8	dB
VSWR (max)	1.9:1	ratio

### Notes:

CW Leakage is measured at 1W input

Up to 1KW peak power handling is available.  
Insertion loss and VSWR will degrade slightly.

Power handling is linearly derated from full power at 25° C to zero power at +150° C

### Environmental Specifications:

Designed to meet:

MIL-E-5400, MIL-STD-202, MIL-E-16400

Operating Temp: -55°C to +125°C

Storage Temp: -65°C to +150°C

Humidity: MIL-STD-202F, M103, Cond B

Shock: MIL-STD-202F, M213, Cond B

Altitude: MIL-STD-202F, M105, Cond B

Vibration: MIL-STD-202F, M204, Cond B

Thermal Shock: MIL-STD-202F, M107, Cond A

Temperature Cycle: MIL-STD-202F, M105C, Cond D

### SCREENING:

Internal Visual per MIL-STD-883, Method 2017

Temperature Cycle: -65°C to +100°C, 10 cycles

### OPTIONAL HIGH-REL SCREENING (Ref MIL-PRF-38534):

Stabilization Bake per MIL-STD-883, Method 1008

Temperature Cycle per MIL-STD-883, Method 1010

Constant Acceleration per MIL-STD-883, Method 2001

Burn-in per MIL-STD-883, Method 1015

Leak Test per MIL-STD-883, Method 1014


External Visual per MIL-STD-883, Method 2009



Revision Date: 8/2/2012

40 Industrial Way East, Eatontown, NJ 07724 [USA]  
Phone: (732) 460-0212, Fax: (732) 460-0214  
www.aeroflex.com/acc, email: acc-sales@aeroflex.com

**Outline Drawing:**

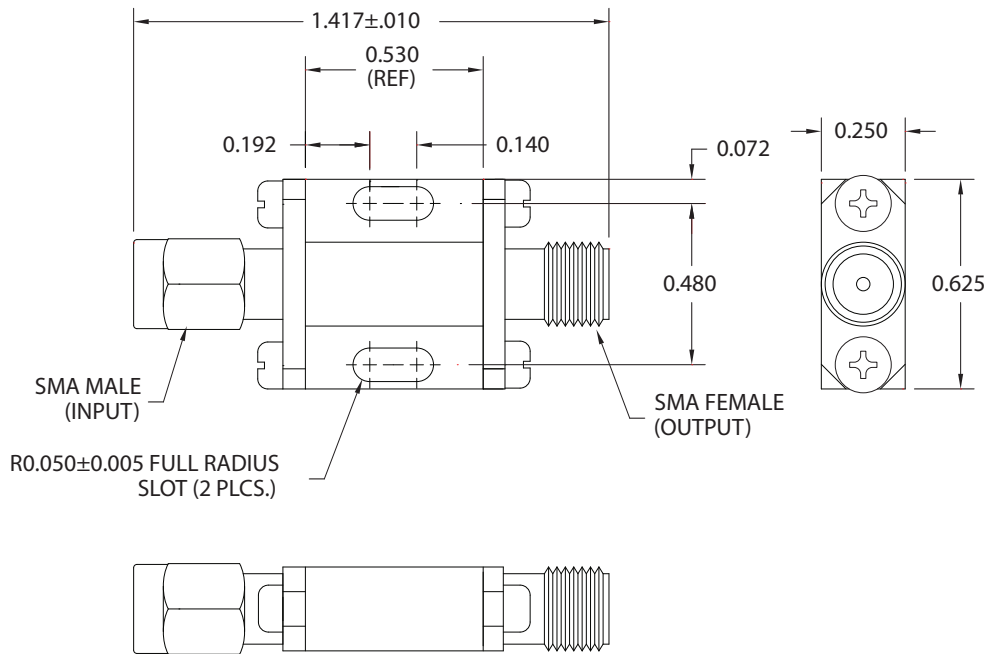

(TYPICAL WEIGHT = 13.0g)

STANDARD CASE STYLE C36

**Part Number Ordering Information:**

- Add desired case style suffix: "C36" (Ex: ACLM-4601C36)
- Add "R" suffix: Reverse Connector Configuration (Ex: ACLM-4601C36R) (SMA Female Input/SMA Male Output)
- Add "1K" suffix: High power handling version: (Ex: ACLM-4601C36R1K)
- Add "-RC" suffix: RoHS-compliant (Ex: ACLM-4601C36R1K-RC)

**Aeroflex Control Components**  
Aeroflex Microelectronic Solutions  
40 Industrial Way East  
Eatontown, NJ 07724 [USA]  
Fax: (732) 460-0214

Sales  
Phone: (732) 460-0212  
ACC-sales@aeroflex.com

[www.aeroflex.com/Microwave](http://www.aeroflex.com/Microwave) [www.aeroflex.com/ACC](http://www.aeroflex.com/ACC)

Aeroflex Control Components reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex Control Components. All rights reserved.

ISO 9001:2008 certified



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.