

ASSP

# DUAL COMPARATOR

## MB47393

### DESCRIPTION


The Fujitsu MB47393 is a dual comparator which is designed to operate from a single power supply over a wide range of voltage. The input characteristics is equivalent of current industry standard comparator. Even though operated from a single power supply, the input common mode voltage range includes ground. Owing to adoption of clamp circuitry in input pins, mis-operation is prevented by negative input. The MB47393 is compatible with LM393.

### FEATURES


- Wide power supply voltage range  
Single power supply — 2V to 30V  
Dual power supplies —  $\pm 1V$  to  $\pm 15V$
- Wide input common-mode voltage range  
0V to  $(V_{CC} - 1.5)V$
- Low input bias current — 25nA typ.
- High sink current capability because of open collector output 40mA min.
- Package  
Plastic 8 pin DIP package (Suffix: -P)  
Plastic 8 pin FPT package (Suffix: -PF)  
Plastic 9 pin SIP package (Suffix: -PS)

### PACKAGE


PLAPMSTIC PACKAGE  
DIP-08P-M01



PLAPMSTIC PACKAGE  
FPT-08P-M01




PLAPMSTIC PACKAGE  
SIP-09P-M01



# MB47393

## ■ PIN ASSIGNMENT

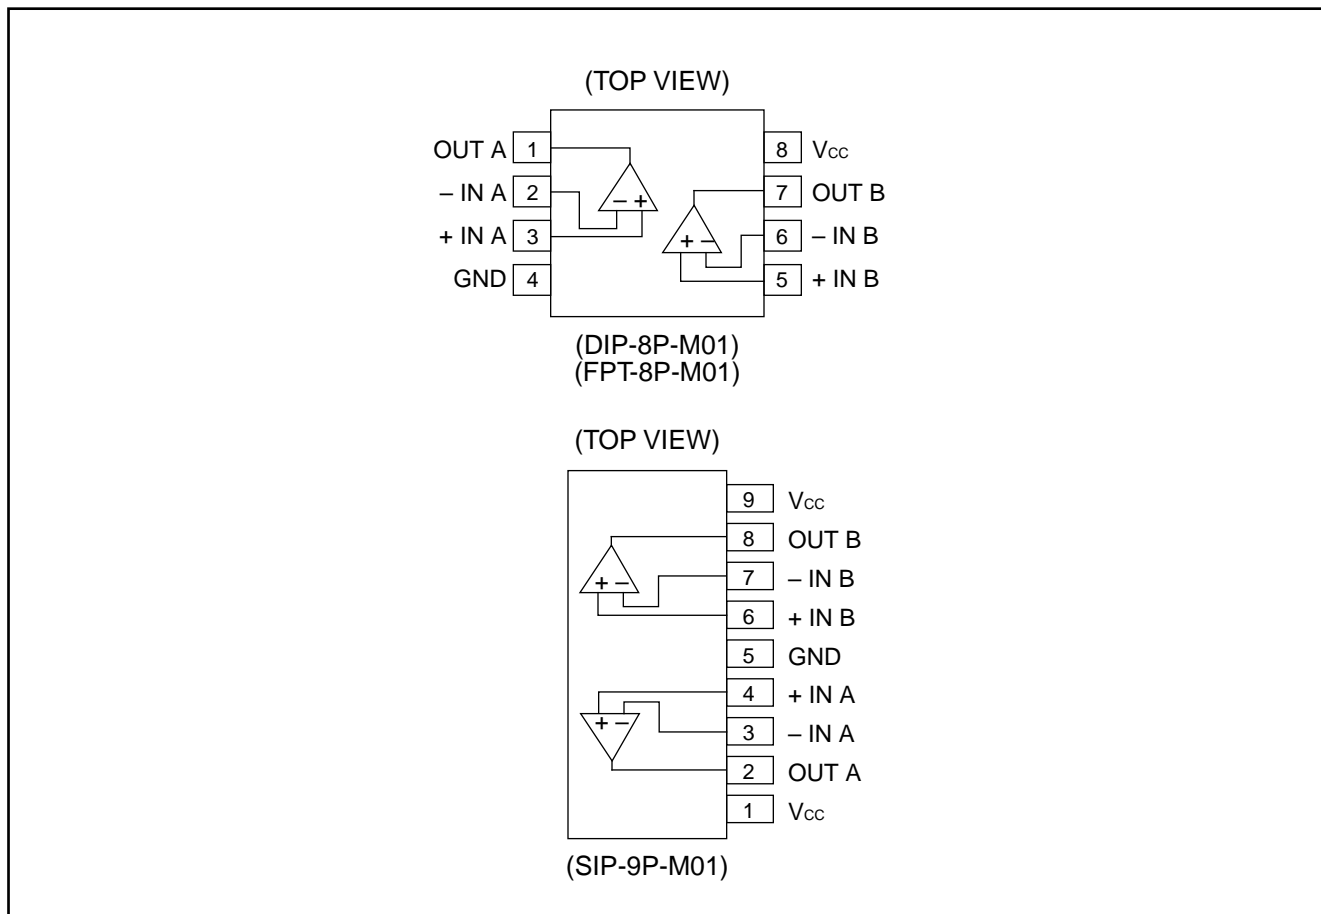

## ■ ABSOLUTE MAXIMUM RATINGS (see NOTE)


$T_a = 25^\circ\text{C}$

Rating	Symbol	Value	Unit
Power Supply Voltage	$V_{CC}$	36	V
Differential Input Voltage	$V_{ID}$	36	V
Common-Mode Input Voltage	$V_I$	-5 to +36	V
Output Short Current to GND	—	Infinite*	—
Power Dissipation	$P_D$	350 ( $T_a \leq 55^\circ\text{C}$ )	mW
Operating Temperature	$T_a$	-20 to +75	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 to +125	$^\circ\text{C}$

\* : This value is specified with respect to the short circuit from output to GND. However, short circuit from the output to  $V_{CC}$  cause device destruction.

Note: Permanent device damage may occur if the above Absolute Maximum Ratings are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Figure 1 MB47393 EQUIVALENT CIRCUIT

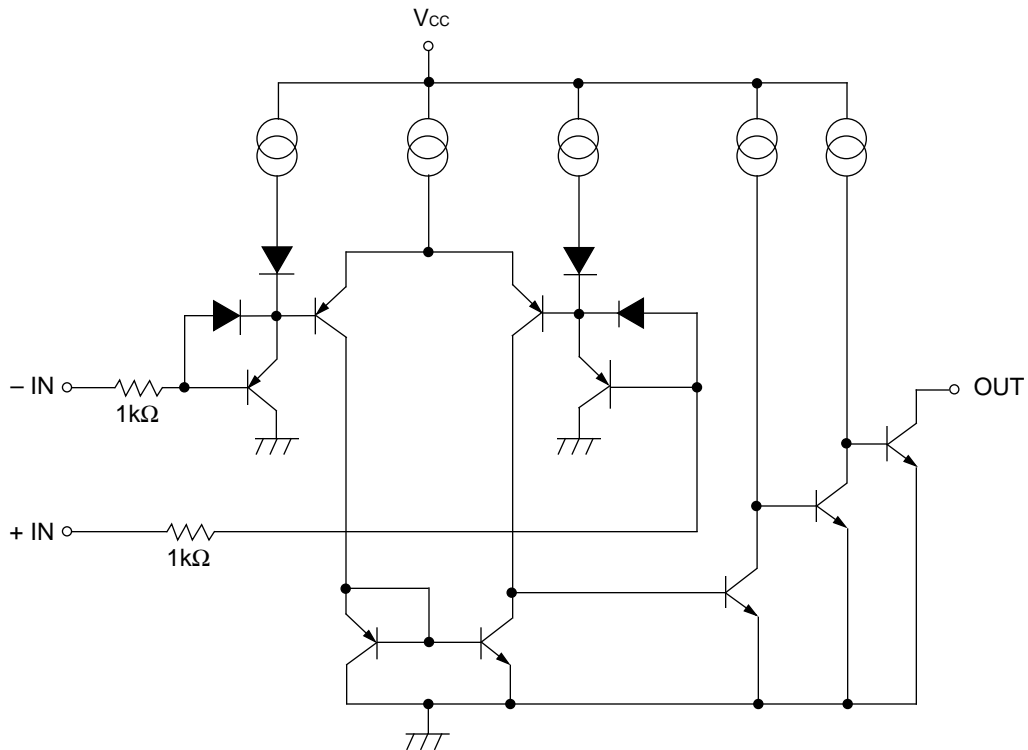

## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value	Unit
Power Supply Voltage	$V_{CC}$	2 to 30	V
		$\pm 1.0$ to $\pm 15$	
Operating Temperature	$T_a$	-20 to +75	$^{\circ}\text{C}$
Output Sink Current	$I_{\text{SINK}}$	$\leq 40$	mA

# MB47393

## ELECTRICAL CHARACTERISTICS

( $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{V}$ )

Parameter	Symbol	Condition	Value			Unit
			Min.	Typ.	Max.	
Input Offset Voltage	$V_{IO}$	$V_O = V_{REF} = 1.4\text{V}$	—	2	5	mV
Input Offset Current	$I_{IO}$	—	—	5	50	nA
Input Bias Current	$I_{IN}^{*1}$	—	—	25	250	nA
Common-Mode Input Voltage	$V_{CM}^{*2}$	—	0	—	$V_{CC}-1.5$	V
Power Supply Current	$I_{CC}$	$R_L = \infty$	—	2	3	mA
Voltage Gain	$A_v$	$R_L = 15\text{k}\Omega$ , $V_{CC} = 15\text{V}$	—	200	—	V/mV
Response Time	—	$R_L = 1\text{k}\Omega$	—	2	—	$\mu\text{s}$
Output Sink Current	$I_{SINK}$	$V_{IN(+)} = 0$ , $V_{IN(-)} = 1\text{V}$ , $V_{OL} \leq 1.5\text{V}$	40	—	—	mA
Output Saturation Voltage	$V_{OL}$	$V_{IN(+)} = 0$ , $V_{IN(-)} = 1\text{V}$ , $I_{SINK} = 30\text{mA}$	—	0.2	0.4	V
Output Leakage Current	$I_{LEAK}$	$V_{IN(+)} = 1\text{V}$ , $V_{IN(-)} = 0\text{V}$ , $V_O = 30\text{V}$	—	—	1	$\mu\text{A}$

Notes:

- \*1:  $I_{IN}$  is measured when  $V_I \geq 0$  and direction of the input current flows from IC. When negative voltage is applied to input pin, the pin is equivalently connected the GND through a  $1\text{k}\Omega$  of resistor. When low voltage below than  $-5\text{V}$  is applied, please connect a resistor serially to input pin in order to prevent the high current flow.
- \*2: Positive input voltage may exceed the power supply voltage. As long as the other voltage remains in the common-mode input voltage range, the comparator will provide a proper output state. When  $V_{CC} = 5\text{V}$ , your are requested to use  $V_{IN}$  below  $25\text{V}$ .

## TYPICAL CHARACTERISTIC CURVES

Figure 2 POWER SUPPLY CURRENT vs POWER SUPPLY VOLTAGE


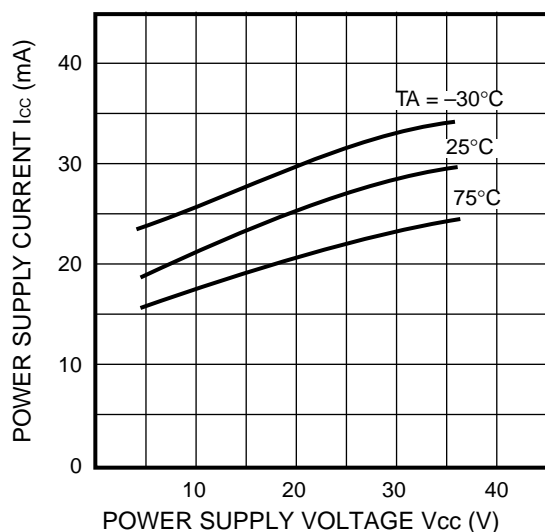


Figure 3 OUTPUT SATURATION VOLTAGE vs OUTPUT SINK CURRENT

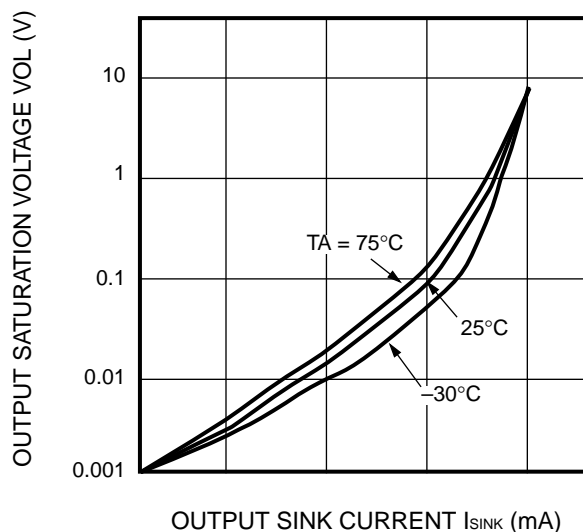

■ TYPICAL CHARACTERISTIC CURVES (Continued)

Figure 4 INPUT CURRENT vs INPUT VOLTAGE

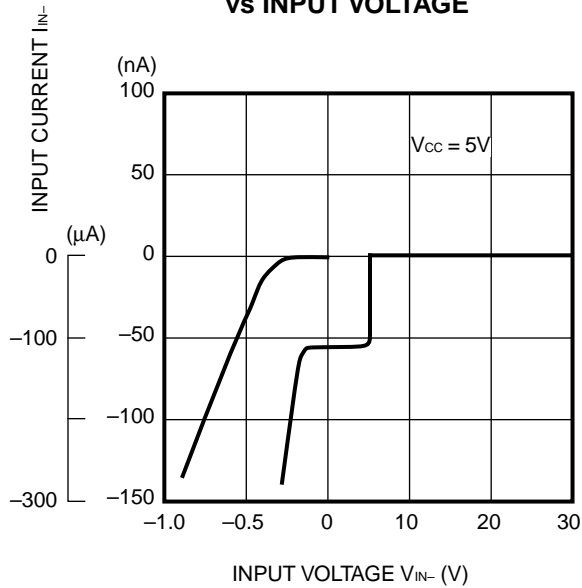


Figure 5 INPUT VOLTAGE/OUTPUT VOLTAGE vs RESPONSE TIME

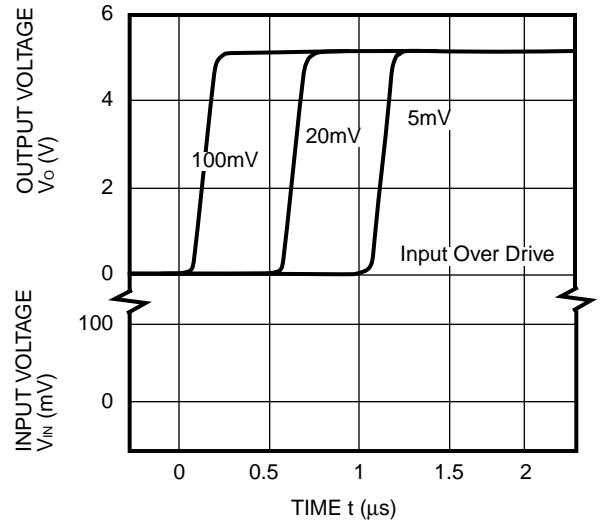


Figure 6 INPUT VOLTAGE/OUTPUT VOLTAGE vs RESPONSE TIME


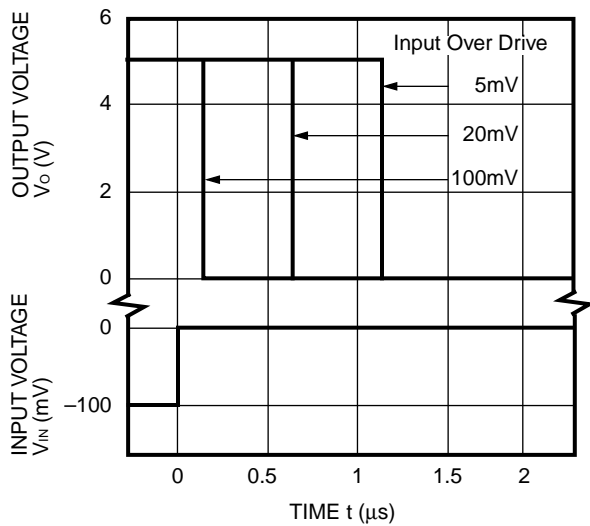



Figure 7 TEST CIRCUIT

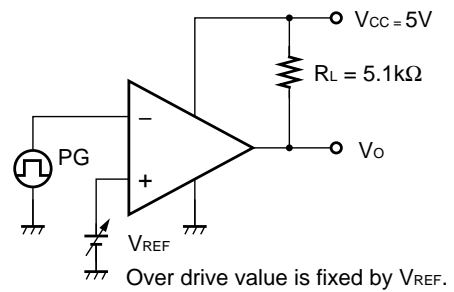

# MB47393

## ■ PACKAGE DIMENSIONS

8 pin, Plastic DIP  
(DIP-8P-M01)

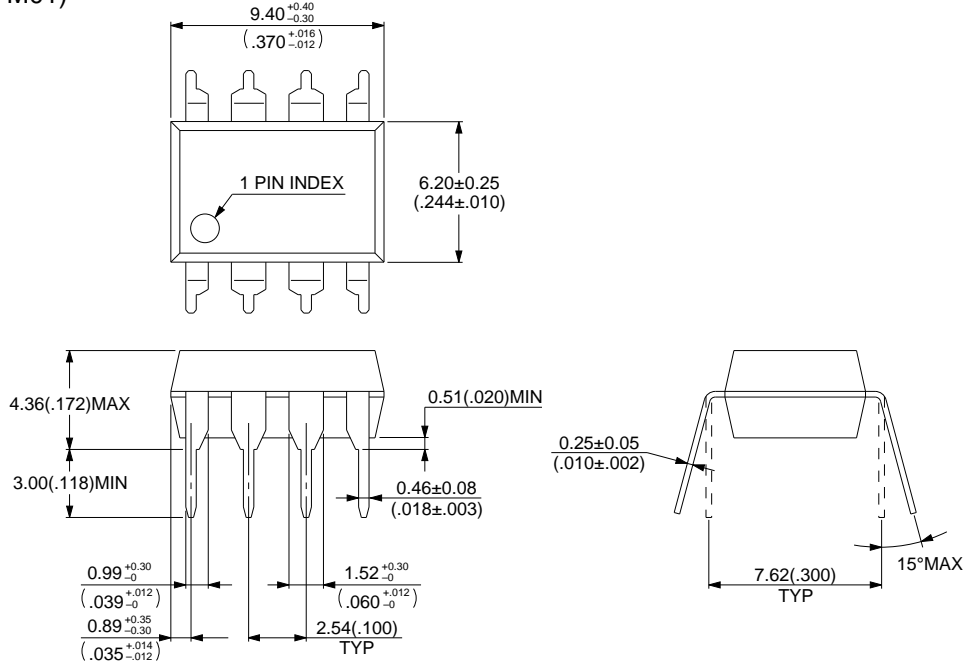


© 1994 FUJITSU LIMITED D08006S-2C-3

Dimensions in mm (inches).

■ PACKAGE DIMENSIONS (Continued)

8 pin, Plastic SOP  
(FPT-8P-M01)

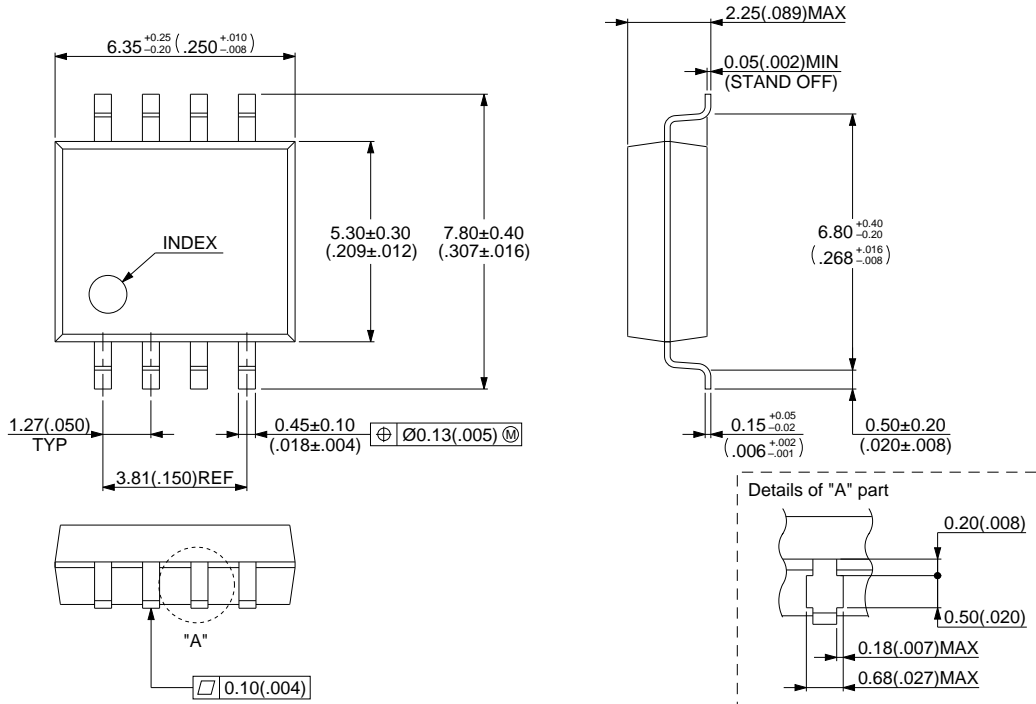


© 1994 FUJITSU LIMITED F08002S-4C-4

Dimensions in mm (inches).

# MB47393

## ■ PACKAGE DIMENSIONS (Continued)

9 pin, Plastic SIP  
(SIP-9P-M01)

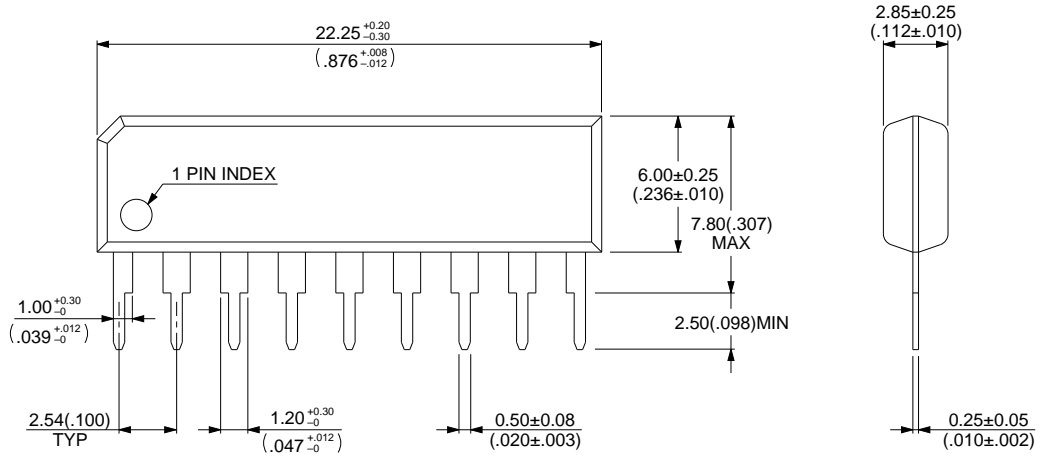

© 1994 FUJITSU LIMITED S09002S-3C-3

Dimensions in mm (inches).



# FUJITSU LIMITED

*For further information please contact:*

## **Japan**

FUJITSU LIMITED  
Corporate Global Business Support Division  
Electronic Devices  
KAWASAKI PLANT, 4-1-1, Kamikodanaka  
Nakahara-ku, Kawasaki-shi  
Kanagawa 211-88, Japan  
Tel: (044) 754-3763  
Fax: (044) 754-3329

## **North and South America**

FUJITSU MICROELECTRONICS, INC.  
Semiconductor Division  
3545 North First Street  
San Jose, CA 95134-1804, U.S.A.  
Tel: (408) 922-9000  
Fax: (408) 432-9044/9045

## **Europe**

FUJITSU MIKROELEKTRONIK GmbH  
Am Siebenstein 6-10  
63303 Dreieich-Buchsschlag  
Germany  
Tel: (06103) 690-0  
Fax: (06103) 690-122

## **Asia Pacific**

FUJITSU MICROELECTRONICS ASIA PTE. LIMITED  
#05-08, 151 Lorong Chuan  
New Tech Park  
Singapore 556741  
Tel: (65) 281-0770  
Fax: (65) 281-0220

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

### **CAUTION:**

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.