ΙΟΕ

E3611A-07B-S N O T E

Supersedes: E3611A-07A-S

E3611A Manual DC Power Supply

R V

S

E

Serial Numbers: KR01725529 through KR09999999, MY4000001/MY40001577, SG40000001/SG40001577

POSSIBLE SHOCK HAZARD

The AC power module can accidentally come out of the instrument creating a shock hazard.

To Be Performed By: Agilent- Service Center or Customer Qualified Personnel.

Parts Required:
P/NDescriptionQty.5065-6978AC Module Repair Kit1

ADMINISTRATIVE INFORMATION


SERVICE NOTE CLASSIFICATION:		
PRIORITY SAFETY		
ACTION		STANDARDS:
CATEGORY:	X Immediately	LABOR: 0.5 Hours
LOCATION	X CUSTOMER INSTALLABLE	SERVICE [[]] RETURN USED [[]] RETURN
CATEGORY:	[[]] ON-SITE X SERVICE CENTER	INVENTORY: X SCRAP PARTS: X SCRAP
TEXT	X CERTICE CERTER	
AVAILABILITY:	ALWAYS	AGILENT RESPONSIBLE UNTIL: ALWAYS
AUTHOR: (CP)	PRODUCT LINE: (PL33)	
ADDITIONAL INFORMATION:		
© AGILENT TECHNOLOGIES, INC. 2002		
PRINTED IN U.S.A.		

September 26, 2002

Situation:

If the AC line cord is forcefully pulled in a side-to-side direction the AC Module can be pulled out of the rear heatsink, exposing the conductors that carry AC line voltage.

Solution/Action: Follow steps 1-4 below:

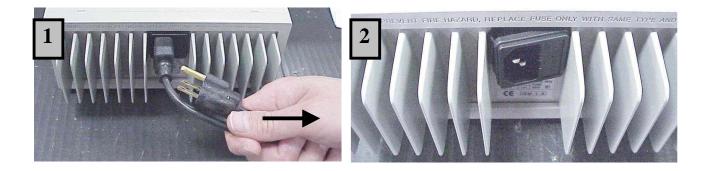


CAUTION: TEST FOR LOOSE AC MODULE


- 1. Make sure linecord is removed from outlet.
- 2. With linecord securely inserted in AC Module as shown, pull forcibly (2 times) in direction of arrow.

LOOSE AC MODULE

- 1. If AC Module pulls out from Unit as shown it will need to be replaced.
- 2. If AC Module remains in place it does not need to be changed. Put a mark on the AC input label in the lower left hand corner with indelible ink to indicate that the AC module has been checked. This label can be found below the AC module.



REMOVE COVER by prying Rear Bezel and Front Panel away from Cover in four places as shown. Then lift Cover off unit.

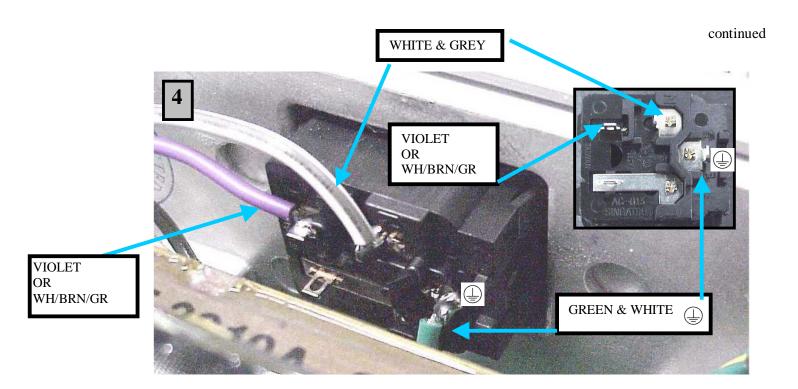

REPLACE MODULE with P/N 5065-6978. Before soldering perform "TEST FOR LOOSE AC MODULE" as shown in picture above. This will confirm that the new Module is secure. Solder wires and **REPLACE FUSE**.

100/120 VAC input use Fuse P/N 2110-0702 (2 amp, 250 volt) 230 VAC input use Fuse P/N 2110-0599 (1 amp, 250 volt)

CAUTION: WIRING MUST BE CORRECT OR HEATSINK COULD BE AT LINE POTENTIAL.

CAUTION: MAKE SURE SAFETY GROUND ${\begin{tabular}{ll} \begin{tabular}{ll} \begin{tab$

After AC Module is soldered, replace cover and turn unit on. No calibration or specification verification is required.

Put a mark on the AC input label in the lower left hand corner with indelible ink to indicate that the AC module has been replaced. This label can be found below the AC module.