


NPN Silicon Germanium RF Transistor

- High gain ultra low noise RF transistor
- Provides outstanding performance for a wide range of wireless applications up to 10 GHz and more
- Ideal for CDMA and WLAN applications
- Outstanding noise figure $F = 0.5$ dB at 1.8 GHz
Outstanding noise figure $F = 0.85$ dB at 6 GHz
- High maximum stable gain
 $G_{ms} = 27$ dB at 1.8 GHz
- Gold metallization for extra high reliability
- 150 GHz f_T -Silicon Germanium technology
- Pb-free (RoHS compliant) package¹⁾
- Qualified according AEC Q101

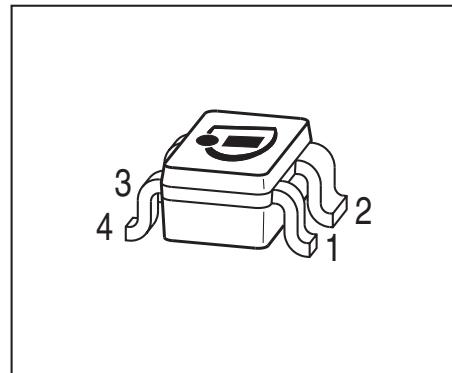

ESD (Electrostatic discharge) sensitive device, observe handling precaution!

Type	Marking	Pin Configuration						Package
BFP740	R7s	1=B	2=E	3=C	4=E	-	-	SOT343

¹⁾Pb-containing package may be available upon special request

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage $T_A > 0^\circ\text{C}$	V_{CEO}	4	V
$T_A \leq 0^\circ\text{C}$		3.5	
Collector-emitter voltage	V_{CES}	13	
Collector-base voltage	V_{CBO}	13	
Emitter-base voltage	V_{EBO}	1.2	
Collector current	I_C	30	mA
Base current	I_B	3	
Total power dissipation ¹⁾ $T_S \leq 89^\circ\text{C}$	P_{tot}	160	mW
Junction temperature	T_j	150	°C
Ambient temperature	T_A	-65 ... 150	
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ²⁾	R_{thJS}	≤ 380	K/W

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	4	4.7	-	V
Collector-emitter cutoff current $V_{\text{CE}} = 13 \text{ V}, V_{\text{BE}} = 0$	I_{CES}	-	-	30	μA
Collector-base cutoff current $V_{\text{CB}} = 5 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Emitter-base cutoff current $V_{\text{EB}} = 0.5 \text{ V}, I_C = 0$	I_{EBO}	-	-	3	μA
DC current gain $I_C = 25 \text{ mA}, V_{\text{CE}} = 3 \text{ V}, \text{pulse measured}$	h_{FE}	160	250	400	-

¹ T_S is measured on the collector lead at the soldering point to the pcb

²For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics (verified by random sampling)					
Transition frequency $I_C = 25 \text{ mA}, V_{CE} = 3 \text{ V}, f = 2 \text{ GHz}$	f_T	-	42	-	GHz
Collector-base capacitance $V_{CB} = 3 \text{ V}, f = 1 \text{ MHz}, V_{BE} = 0 \text{ V}$, emitter grounded	C_{cb}	-	0.08	0.14	pF
Collector emitter capacitance $V_{CE} = 3 \text{ V}, f = 1 \text{ MHz}, V_{BE} = 0 \text{ V}$, base grounded	C_{ce}	-	0.24	-	
Emitter-base capacitance $V_{EB} = 0.5 \text{ V}, f = 1 \text{ MHz}, V_{CB} = 0 \text{ V}$, collector grounded	C_{eb}	-	0.44	-	
Noise figure $I_C = 8 \text{ mA}, V_{CE} = 3 \text{ V}, f = 1.8 \text{ GHz}, Z_S = Z_{Sopt}$ $I_C = 8 \text{ mA}, V_{CE} = 3 \text{ V}, f = 6 \text{ GHz}, Z_S = Z_{Sopt}$	F	-	0.5	-	dB
-		-	0.85	-	
Power gain, maximum stable ¹⁾ $I_C = 25 \text{ mA}, V_{CE} = 3 \text{ V}, Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}, f = 1.8 \text{ GHz}$	G_{ms}	-	27	-	dB
Power gain, maximum available ¹⁾ $I_C = 25 \text{ mA}, V_{CE} = 3 \text{ V}, Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}, f = 6 \text{ GHz}$	G_{ma}	-	17	-	dB
Transducer gain $I_C = 25 \text{ mA}, V_{CE} = 3 \text{ V}, Z_S = Z_L = 50 \Omega$, $f = 1.8 \text{ GHz}$ $f = 6 \text{ GHz}$	$ S_{21e} ^2$	-	24.5	-	dB
-		-	13.5	-	
Third order intercept point at output ²⁾ $V_{CE} = 3 \text{ V}, I_C = 25 \text{ mA}, Z_S = Z_L = 50 \Omega, f = 1.8 \text{ GHz}$	IP_3	-	25	-	dBm
1dB Compression point at output $I_C = 25 \text{ mA}, V_{CE} = 3 \text{ V}, Z_S = Z_L = 50 \Omega, f = 1.8 \text{ GHz}$	$P_{-1\text{dB}}$	-	11	-	


¹ $G_{ma} = |S_{21e}| / S_{12e} (k - (k^2 - 1)^{1/2})$, $G_{ms} = |S_{21e}| / S_{12e}$
²IP3 value depends on termination of all intermodulation frequency components.

Termination used for this measurement is 50Ω from 0.1 MHz to 6 GHz

SPICE Parameter (Gummel-Poon Model, Berkley-SPICE 2G.6 Syntax):
Transistor Chip Data:

IS =	384.4	aA	BF =	1.1	k	NF =	1.018	-
VAF =	400	V	IKF =	512.1	mA	ISE =	4.296	fA
NE =	1.586	-	BR =	62	-	NR =	1	-
VAR =	1.28	V	IKR =	5	mA	ISC =	3.85	fA
NC =	1.5	-	RB =	3.23	Ω	IRB =	10	A
RBM =	1.69	Ω	RE =	90	$m\Omega$	RC =	6.88	Ω
CJE =	220	fF	VJE =	590	mV	MJE =	70	m
TF =	2.1	ps	XTF =	3	-	VTF =	1.32	V
ITF =	290	mA	PTF =	100	mdeg	CJC =	99.5	fF
VJC =	550	mV	MJC =	152	m	XCJC =	10	m
TR =	13	ps	CJS =	79.7	fF	VJS =	570	mV
MJS =	180	m	XTB =	-2.2	-	EG =	1.11	eV
XTI =	910	m	FC =	950	m	TNOM	298	K
AF =	1	-	KF =	0	-			

All parameters are ready to use, no scaling is necessary.

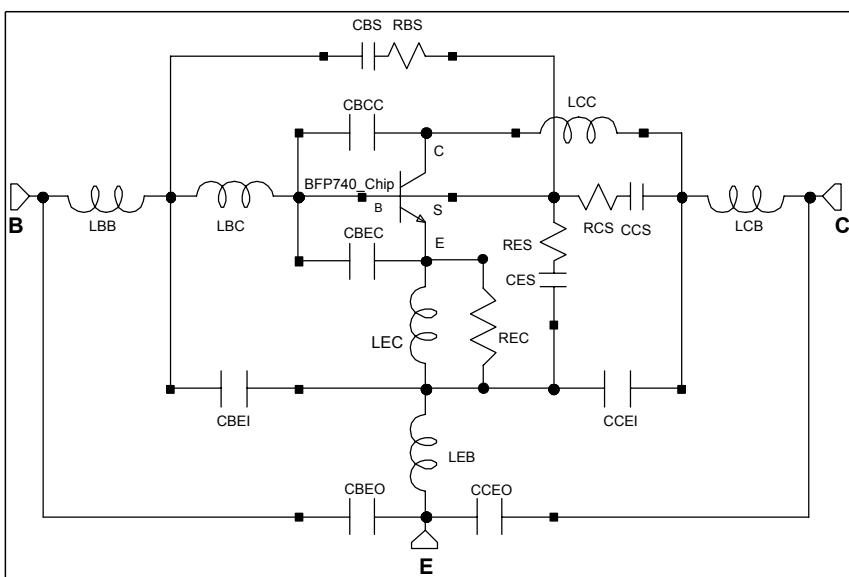
Package Equivalent Circuit:


For examples and ready to use parameters
please contact your local Infineon Technologies
distributor or sales office to obtain a Infineon
Technologies CD-ROM or see Internet:
<http://www.infineon.com>


LBC =	0.1	nH
LCC =	0.2	nH
LEC =	20	pH
LBB =	0.6	nH
LCB =	0.88	nH
LEB =	90	pH
CBEC =	0.1	pF
CBCC =	1	fF
CES =	0.34	pF
CBS =	39.3	fF
CCS =	75	fF
CCEO =	0.177	pF
CBEO =	0.102	pF
CCEI =	0.224	pF
CBEI =	0.18	pF
REC =	670	$m\Omega$
RBS =	3.5	$k\Omega$
RCS =	1.65	$k\Omega$
RES =	90	Ω

Valid up to 6GHz

Total power dissipation $P_{\text{tot}} = f(T_S)$

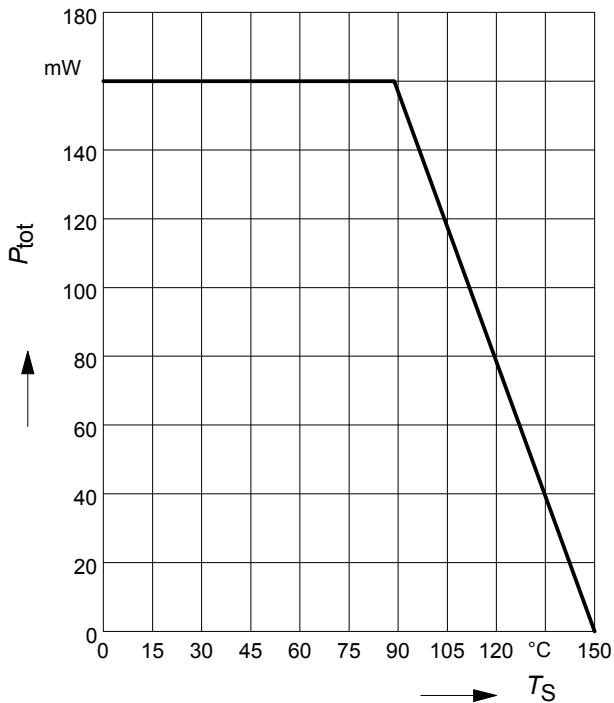


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

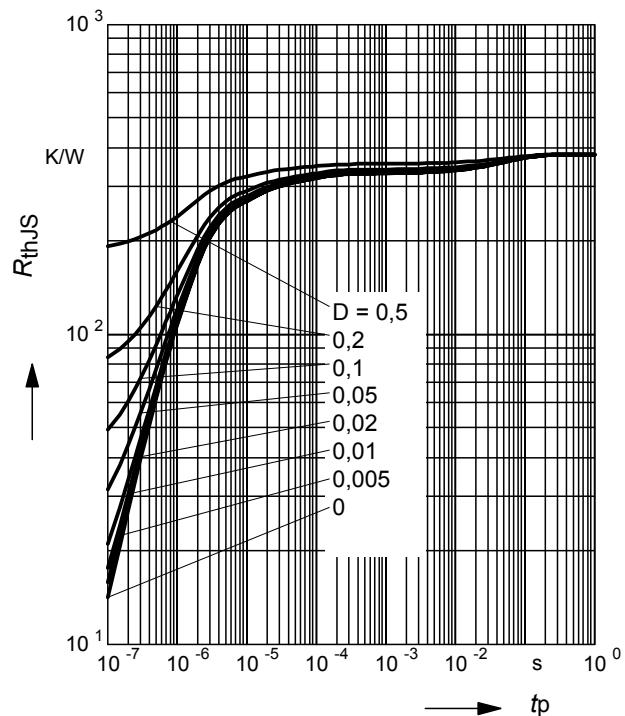


Permissible Pulse Load

$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$

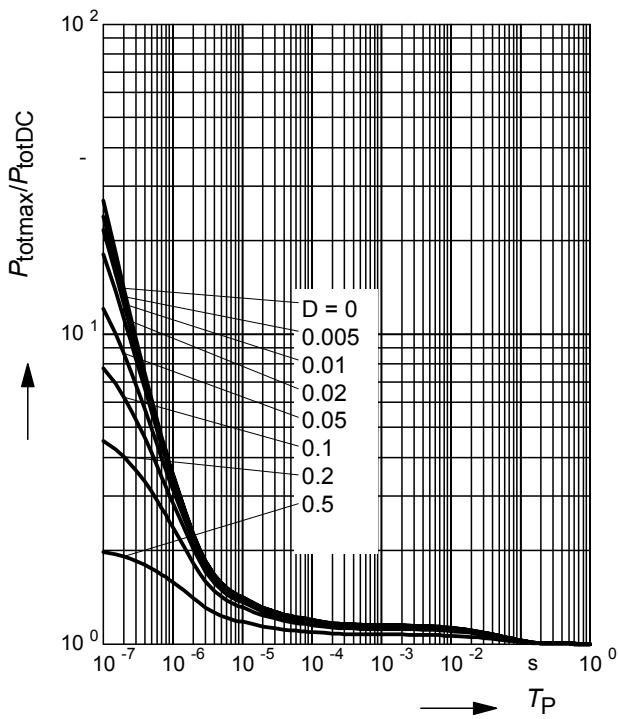

Collector-base capacitance $C_{\text{cb}} = f(V_{\text{CB}})$


$f = 1 \text{ MHz}$

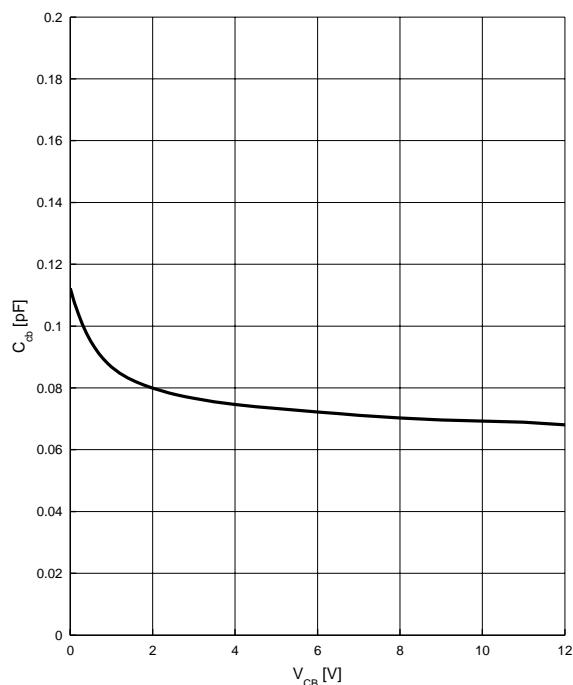

Third order Intercept Point $IP_3 = f(I_C)$

(Output, $Z_S = Z_L = 50 \Omega$)

V_{CE} = parameter, $f = 1.8$ GHz

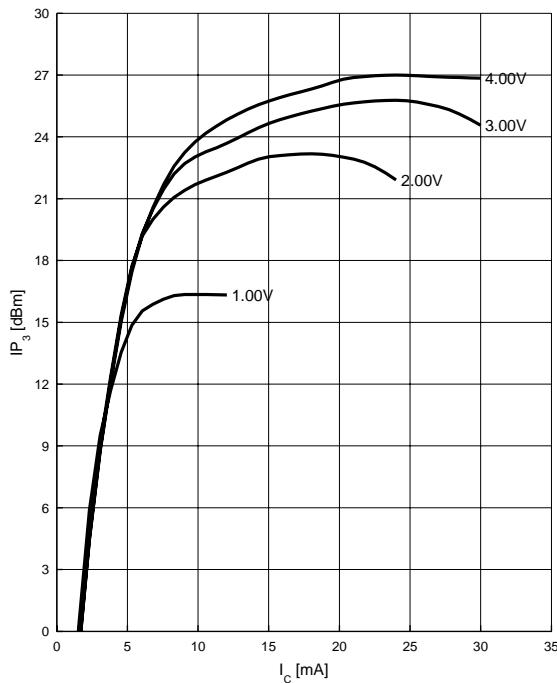


Power gain $G_{ma}, G_{ms} = f(f)$

$V_{CE} = 3$ V, $I_C = 25$ mA

Transition frequency $f_T = f(I_C)$

$f = 2$ GHz



V_{CE} = parameter

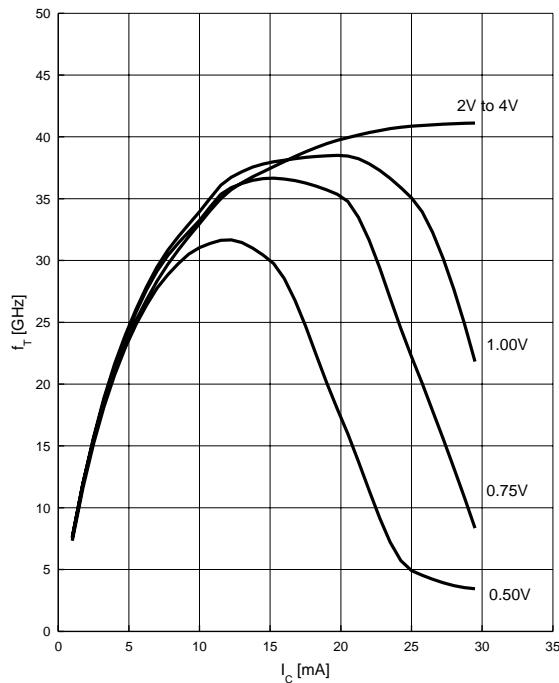

Power gain $G_{ma}, G_{ms} = f(I_C)$

$V_{CE} = 3$ V


f = parameter

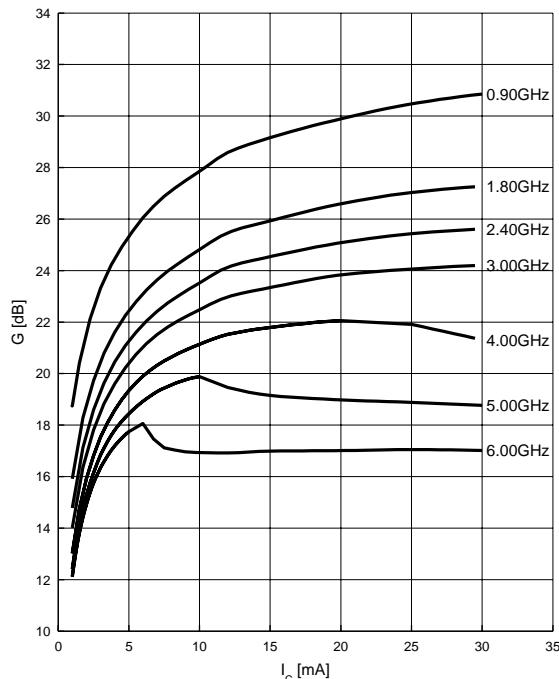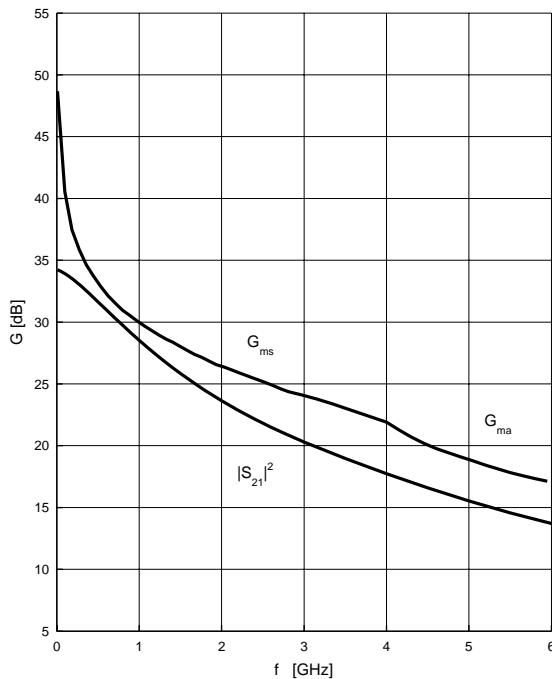

Power gain $G_{\text{ma}}, G_{\text{ms}} = f(V_{\text{CE}})$

$I_{\text{C}} = 25 \text{ mA}$

$f = \text{parameter}$

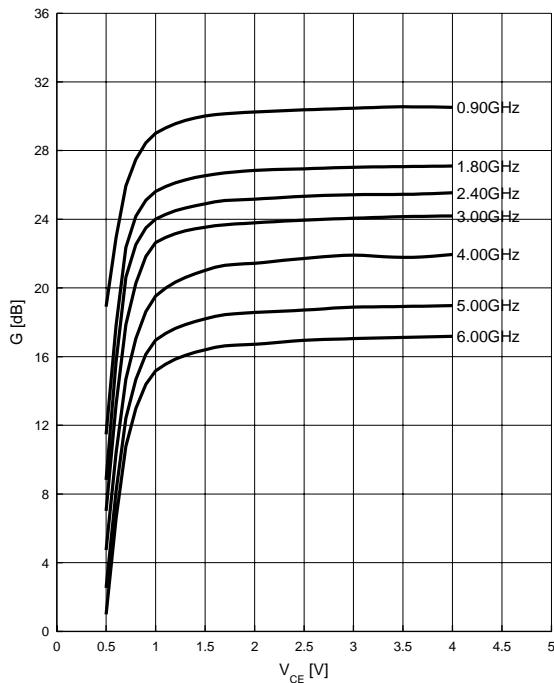


Noise figure $F = f(I_{\text{C}})$

$V_{\text{CE}} = 3 \text{ V}, f = 1.8 \text{ GHz}$

Noise figure $F = f(I_{\text{C}})$



$V_{\text{CE}} = 3 \text{ V}, f = \text{parameter}$

$Z_S = Z_{\text{Sopt}}$

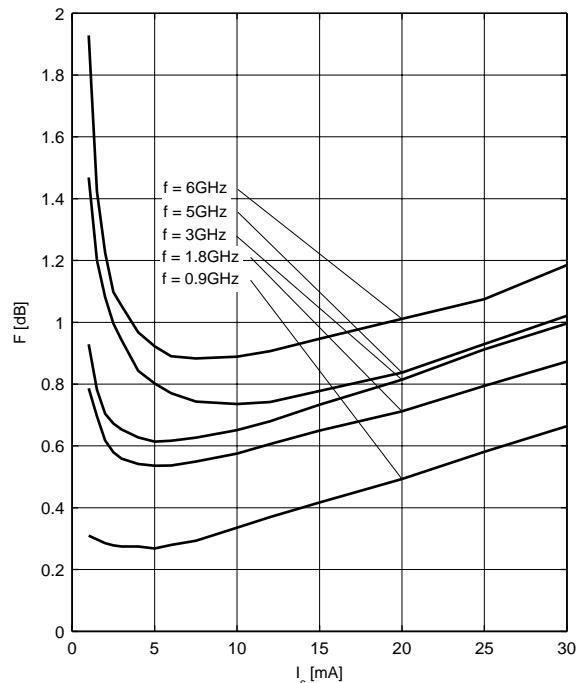

Noise figure $F = f(f)$


$V_{\text{CE}} = 3 \text{ V}, Z_S = Z_{\text{Sopt}}$

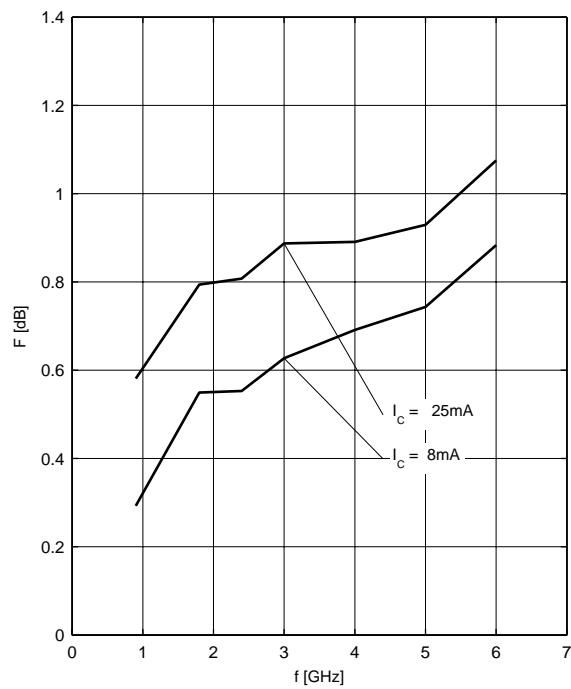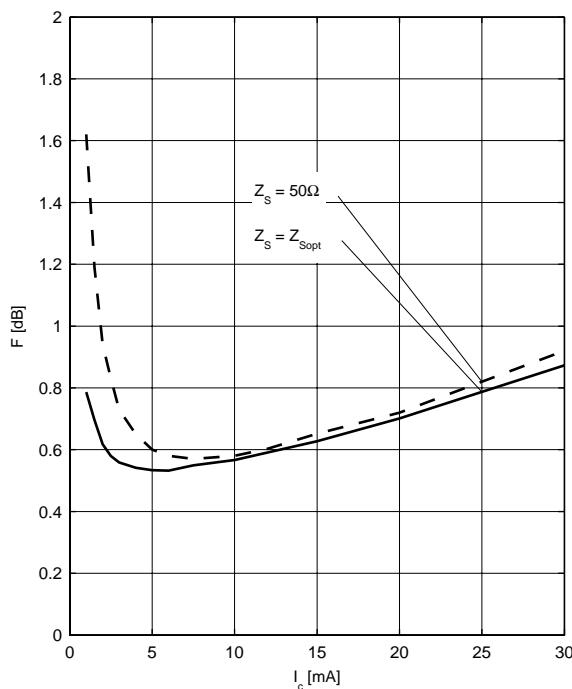


Source impedance for min.

noise figure vs. frequency


$$V_{CE} = 3 \text{ V}, I_C = 8 \text{ mA / } 25 \text{ mA}$$

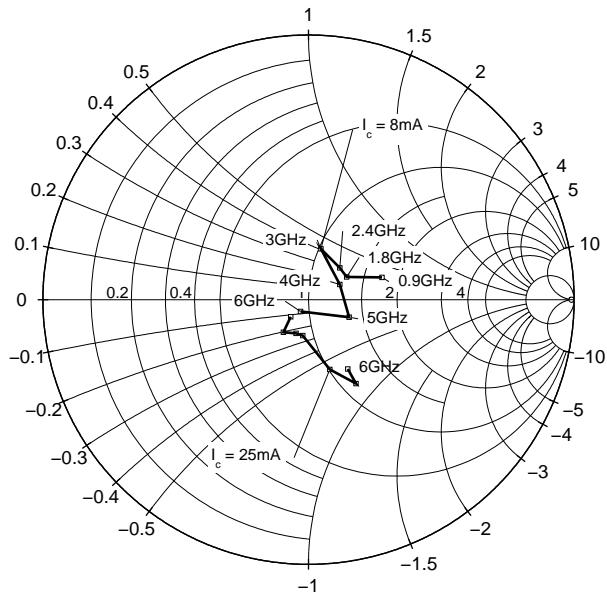


Package Outline

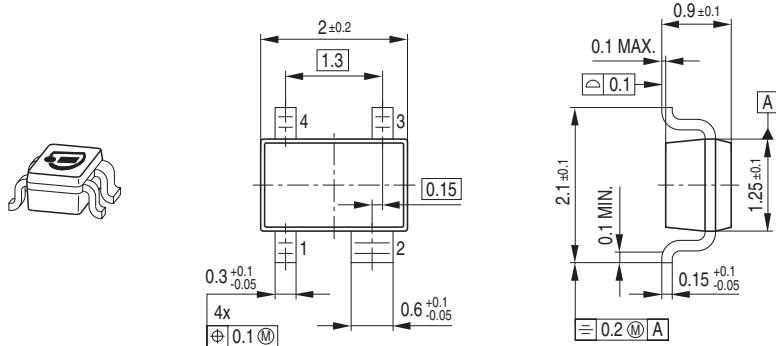

Foot Print

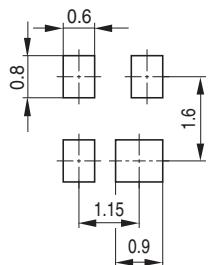


Marking Layout (Example)

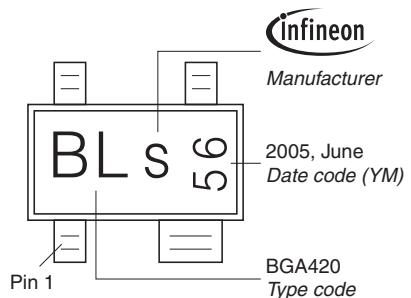

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

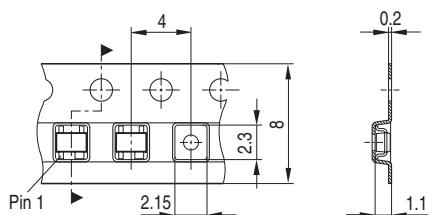

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

Attention please!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.