

intel

iAPX 286

Programmer's Reference Manual

including the iAPX 286 Numeric Supplement

286

ARROW ELECTRONICS, INC.
ELECTRONICS DISTRIBUTION DIVISION
521 WEDDELL DRIVE
SUNNYVALE CALIFORNIA 94089
408/745/6600





LITERATURE

To order Intel Literature write or call:

Intel Literature Sales
P.O. Box 58130
Santa Clara, CA 95052-8130

Intel Literature Sales:
(800) 548-4725
Other Inquiries:
(800) 538-1876

Use the order blank on the facing page or call our Toll Free Number listed above to order literature. Remember to add your local sales tax and a 10% handling charge for U.S. customers, 20% for Canadian customers.

1986 HANDBOOKS

Product Line handbooks contain data sheets, application notes, article reprints and other design information.

| NAME | ORDER NUMBER | *PRICE IN U.S. DOLLARS |
|--|--------------|------------------------|
| COMPLETE SET OF 9 HANDBOOKS Get a 30% discount off the retail price of \$171.00 | 231003 | \$120.00 |
| MEMORY COMPONENTS HANDBOOK | 210830 | \$18.00 |
| MICROCOMMUNICATIONS HANDBOOK | 231658 | \$18.00 |
| MICROCONTROLLER HANDBOOK | 210918 | \$18.00 |
| MICROSYSTEM COMPONENTS HANDBOOK Microprocessor and peripherals (2 Volume Set) | 230843 | \$25.00 |
| DEVELOPMENT SYSTEMS HANDBOOK | 210940 | \$18.00 |
| OEM SYSTEMS HANDBOOK | 210941 | \$18.00 |
| SOFTWARE HANDBOOK | 230786 | \$18.00 |
| MILITARY HANDBOOK | 210461 | \$18.00 |
| QUALITY/RELIABILITY HANDBOOK | 210997 | \$20.00 |
| PRODUCT GUIDE Overview of Intel's complete product lines | 210846 | No charge |
| LITERATURE GUIDE Listing of Intel Literature | 210620 | No charge |
| INTEL PACKAGING SPECIFICATIONS Listing of Packaging types, number of leads, and dimensions | 231369 | No charge |

*These prices are for the U. S. and Canada only. In Europe and other international locations, please contact your local Intel Sales Office or Distributor for literature prices.



**iAPX 286 PROGRAMMER'S
REFERENCE MANUAL INCLUDING
THE iAPX 286 NUMERIC SUPPLEMENT**

1985

Intel Corporation makes no warranty for the use of its products and assumes no responsibility for any errors which may appear in this document nor does it make a commitment to update the information contained herein.

Intel retains the right to make changes to these specifications at any time, without notice.

Contact your local sales office to obtain the latest specifications before placing your order.

The following are trademarks of Intel Corporation and may only be used to identify Intel Products:

BITBUS, COMMputer, CREDIT, Data Pipeline, GENIUS, i¹ICE, iCS, iDBP, iDIS, i²ICE, iLBX, i_m, iMDDX, iMMX, Insite, Intel, int_g, int_gIBOS, Intelevison, int_gligent Identifier, int_gligent Programming, Inteltec, Intellink, iOSP, iPDS, iRMX, iSBC, iSBX, iSDM, iSXM, KEPROM, Library Manager, MCS, Megachassis, MICROMAINFRAME, MULTIBUS, MULTICHANNEL, MULTIMODULE, OpenNET, Plug-A-Bubble, PROMPT, Promware, QUEST, QueX, Ripplemode, RMX/80, RUPI, Seamless, SLD, and UPI, and the combination of ICE, iCS, iRMX, iSBC, iSBX, MCS, or UPI and a numerical suffix.

MDS is an ordering code only and is not used as a product name or trademark. MDS® is a registered trademark of Mohawk Data Sciences Corporation.

* MULTIBUS is a patented Intel bus.

Additional copies of this manual or other Intel literature may be obtained from:

Intel Corporation
Literature Distribution
Mail Stop SC6-714
3065 Bowers Avenue
Santa Clara, CA 95051

Table of Contents

| | Page |
|---|------|
| CHAPTER 1 | |
| INTRODUCTION TO iAPX 286 | |
| General Attributes | 1-1 |
| Modes of Operation | 1-2 |
| Advanced Features | 1-2 |
| Memory Management | 1-2 |
| Task Management | 1-3 |
| Protection Mechanisms | 1-3 |
| Support for Operating Systems | 1-4 |
| Organization of This Manual | 1-4 |
| Related Publications | 1-6 |
| CHAPTER 2 | |
| iAPX 286 BASE ARCHITECTURE | |
| Memory Organization and Segmentation | 2-1 |
| Data Types | 2-1 |
| Registers | 2-6 |
| General Registers | 2-6 |
| Memory Segmentation and Segment Registers | 2-7 |
| Index, Pointer, and Base Registers | 2-10 |
| Status and Control Registers | 2-14 |
| Addressing Modes | 2-15 |
| Operands | 2-16 |
| Register and Immediate Modes | 2-17 |
| Memory Addressing Modes | 2-17 |
| Segment Selection | 2-17 |
| Offset Computation | 2-19 |
| Memory Mode | 2-20 |
| Input/Output | 2-22 |
| I/O Address Space | 2-22 |
| Memory-Mapped I/O | 2-23 |
| Interrupts and Exceptions | 2-23 |
| Hierarchy of Instruction Sets | 2-25 |
| CHAPTER 3 | |
| BASIC INSTRUCTION SET | |
| Data Movement Instructions | 3-1 |
| General-Purpose Data Movement Instructions | 3-1 |
| Stack Manipulation Instructions | 3-1 |
| Flag Operation with the Basic Instruction Set | 3-5 |
| Status Flags | 3-5 |
| Control Flags | 3-5 |
| Arithmetic Instructions | 3-6 |
| Addition Instructions | 3-7 |
| Subtraction Instructions | 3-7 |
| Multiplication Instructions | 3-8 |
| Division Instructions | 3-9 |
| Logical Instructions | 3-10 |
| Boolean Operation Instructions | 3-10 |
| Shift and Rotate Instructions | 3-10 |
| Shift Instructions | 3-11 |
| Rotate Instructions | 3-13 |
| Type Conversion and No-Operation Instructions | 3-17 |

Table of Contents (cont.)

| | Page |
|--|------|
| Test and Compare Instructions | 3-17 |
| Control Transfer Instructions | 3-17 |
| Unconditional Transfer Instructions | 3-18 |
| Jump Instruction | 3-18 |
| Call Instruction | 3-20 |
| Return and Return From Interrupt Instruction | 3-20 |
| Conditional Transfer Instructions | 3-21 |
| Conditional Jump Instructions | 3-21 |
| Loop Instructions | 3-21 |
| Executing a Loop or Repeat Zero Times | 3-22 |
| Software-Generated Interrupts | 3-23 |
| Software Interrupt Instruction | 3-23 |
| Character Translation and String Instructions | 3-23 |
| Translate Instruction | 3-23 |
| String Manipulation Instructions and Repeat Prefixes | 3-23 |
| String Movement Instructions | 3-24 |
| Other String Operations | 3-25 |
| Address Manipulation Instructions | 3-25 |
| Flag Control Instructions | 3-26 |
| Carry Flag Control Instructions | 3-26 |
| Direction Flag Control Instructions | 3-26 |
| Flag Transfer Instructions | 3-27 |
| Binary-Coded Decimal Arithmetic Instructions | 3-27 |
| Packed BCD Adjustment Instructions | 3-28 |
| Unpacked BCD Adjustment Instructions | 3-28 |
| Trusted Instructions | 3-29 |
| Trusted and Privileged Instructions on POPF and IRET | 3-29 |
| Machine State Instructions | 3-29 |
| Input and Output Instructions | 3-29 |
| Processor Extension Instructions | 3-30 |
| Processor Extension Synchronization Instructions | 3-30 |
| Numeric Data Processor Instructions | 3-31 |
| Arithmetic Instructions | 3-31 |
| Comparison Instructions | 3-31 |
| Transcendental Instructions | 3-31 |
| Data Transfer Instructions | 3-31 |
| Constant Instructions | 3-31 |
| CHAPTER 4 | |
| EXTENDED INSTRUCTION SET | |
| Block I/O Instructions | 4-1 |
| High-Level Instructions | 4-2 |
| CHAPTER 5 | |
| REAL ADDRESS MODE | |
| Addressing and Segmentation | 5-1 |
| Interrupt Handling | 5-3 |
| Interrupt Vector Table | 5-3 |
| Interrupt Priorities | 5-4 |
| Interrupt Procedures | 5-4 |
| Reserved and Dedicated Interrupt Vectors | 5-5 |
| System Initialization | 5-7 |

Table of Contents (cont.)

| | | |
|---|--|-------------|
| CHAPTER 6 | | |
| MEMORY MANAGEMENT AND VIRTUAL ADDRESSING | | Page |
| Memory Management Overview | | 6-1 |
| Virtual Addresses | | 6-2 |
| Descriptor Tables | | 6-4 |
| Virtual-to-Physical Address Translation | | 6-6 |
| Segments and Segment Descriptors | | 6-7 |
| Memory Management Registers | | 6-8 |
| Segment Address Translation Registers | | 6-9 |
| System Address Registers | | 6-11 |
| | | |
| CHAPTER 7 | | |
| PROTECTION | | |
| Introduction | | 7-1 |
| Types of Protection | | 7-1 |
| Protection Implementation | | 7-2 |
| Memory Management and Protection | | 7-4 |
| Separation of Address Spaces | | 7-5 |
| LDT and GDT Access Checks | | 7-5 |
| Type Validation | | 7-8 |
| Privilege Levels and Protection | | 7-8 |
| Example of Using Four Privilege Levels | | 7-8 |
| Privilege Usage | | 7-10 |
| Segment Descriptor | | 7-10 |
| Data Accesses | | 7-12 |
| Code Segment Access | | 7-13 |
| Data Access Restriction by Privilege Level | | 7-14 |
| Pointer Privilege Stamping via ARPL | | 7-14 |
| Control Transfers | | 7-15 |
| Gates | | 7-16 |
| Call Gates | | 7-17 |
| Intra-Level Transfers via Call Gate | | 7-18 |
| Inter-Level Control Transfer via Call Gates | | 7-19 |
| Stack Changes Caused by Call Gates | | 7-20 |
| Inter-Level Returns | | 7-20 |
| | | |
| CHAPTER 8 | | |
| TASKS AND STATE TRANSITIONS | | |
| Introduction | | 8-1 |
| Task State Segments and Descriptors | | 8-1 |
| Task State Segment Descriptors | | 8-3 |
| Task Switching | | 8-4 |
| Task Linking | | 8-6 |
| Task Gates | | 8-8 |
| | | |
| CHAPTER 9 | | |
| INTERRUPTS AND EXCEPTIONS | | |
| Interrupt Descriptor Table | | 9-1 |
| Hardware Initiated Interrupts | | 9-2 |
| Software Initiated Interrupts | | 9-3 |
| Interrupt Gates and Trap Gates | | 9-3 |
| Task Gates and Interrupt Tasks | | 9-7 |

Table of Contents (cont.)

| | Page |
|---|-------------|
| Scheduling Considerations | 9-8 |
| Deciding Between Task, Trap, and Interrupt Gates | 9-8 |
| Protection Exceptions and Reserved Vectors | 9-9 |
| Invalid OP-Code (Interrupt 6) | 9-10 |
| Double Fault (Interrupt 8) | 9-10 |
| Processor Extension Segment Overrun (Interrupt 9) | 9-10 |
| Invalid Task State Segment (Interrupt 10) | 9-11 |
| Not Present (Interrupt 11) | 9-11 |
| Stack Fault (Interrupt 12) | 9-12 |
| General Protection Fault (Interrupt 13) | 9-12 |
| Additional Exceptions and Interrupts | 9-13 |
| Single Step Interrupt (Interrupt 1) | 9-13 |
| CHAPTER 10 | |
| SYSTEM CONTROL AND INITIALIZATION | |
| System Flags and Registers | 10-1 |
| Descriptor Table Registers | 10-1 |
| System Control Instructions | 10-3 |
| Machine Status Word | 10-4 |
| Other Instructions | 10-4 |
| Privileged and Trusted Instructions | 10-5 |
| Initialization | 10-6 |
| Real Address Mode | 10-6 |
| Protected Mode | 10-6 |
| CHAPTER 11 | |
| ADVANCED TOPICS | |
| Virtual Memory Management | 11-1 |
| Special Segment Attributes | 11-1 |
| Conforming Code Segments | 11-1 |
| Expand-Down Data Segments | 11-2 |
| Pointer Validation | 11-2 |
| Descriptor Validation | 11-3 |
| Pointer Integrity: RPL and the "Trojan Horse Problem" | 11-4 |
| NPX Context Switching | 11-4 |
| Multiprocessor Considerations | 11-5 |
| Shutdown | 11-7 |
| APPENDIX A | |
| iAPX 286 SYSTEM INITIALIZATION | |
| APPENDIX B | |
| THE iAPX 286 INSTRUCTION SET | |
| APPENDIX C | |
| iAPX 286/10 | |
| APPENDIX D | |
| iAPX 86/88 SOFTWARE COMPATIBILITY CONSIDERATIONS | |
| APPENDIX E | |
| iAPX 286/386 SOFTWARE COMPATIBILITY CONSIDERATIONS | |

Figures

| Figure | Title | Page |
|--------|---|------|
| 1-1 | Four Privilege Levels | 1-4 |
| 2-1 | Segmented Virtual Memory | 2-2 |
| 2-2 | Bytes and Words in Memory | 2-3 |
| 2-3 | iAPX 286 Supported Data Types | 2-4 |
| 2-4 | iAPX 286 Base Architecture Register Set | 2-7 |
| 2-5 | Real Address Mode Segment Selector Interpretation | 2-9 |
| 2-6 | Protected Mode Segment Selector Interpretation | 2-9 |
| 2-7 | iAPX 286 Stack | 2-10 |
| 2-8 | Stack Operation | 2-12 |
| 2-9 | BP Usage as a Stack Frame Base Pointer | 2-13 |
| 2-10 | Flags Register | 2-14 |
| 2-11 | Two-Component Address | 2-18 |
| 2-12 | Use of Memory Segmentation | 2-19 |
| 2-13 | Complex Addressing Modes | 2-21 |
| 2-14 | Memory Mapped I/O | 2-23 |
| 2-15 | Hierarchy of Instructions | 2-25 |
| 3-1 | PUSH | 3-2 |
| 3-2 | PUSHA | 3-3 |
| 3-3 | POP | 3-4 |
| 3-4 | POPA | 3-5 |
| 3-5 | Flag Word Contents | 3-6 |
| 3-6 | SAL and SHL | 3-11 |
| 3-7 | SHR | 3-12 |
| 3-8 | SAR | 3-12 |
| 3-9 | ROL | 3-13 |
| 3-10 | ROR | 3-14 |
| 3-11 | RCL | 3-15 |
| 3-12 | RCR | 3-16 |
| 3-13 | LAHF and SAHF | 3-27 |
| 3-14 | PUSHF and POPF | 3-28 |
| 4-1 | Format Definition of the ENTER Instruction | 4-3 |
| 4-2 | Variable Access in Nested Procedures | 4-4 |
| 4-2a | Stack Frame for MAIN at Level 1 | 4-5 |
| 4-2b | Stack Frame for Procedure A | 4-5 |
| 4-2c | Stack Frame for Procedure B at Level 3 Called from A | 4-5 |
| 4-2d | Stack Frame for Procedure C at Level 3 Called from B | 4-6 |
| 5-1a | Forming the Segment Base Address | 5-2 |
| 5-1b | Forming the 20-Bit Physical Address in the Real Address Mode | 5-2 |
| 5-2 | Overlapping Segments to Save Physical Memory | 5-3 |
| 5-3 | Interrupt Vector Table for Real Address Mode | 5-4 |
| 5-4 | Stack Structure After Interrupt (Real Address Mode) | 5-4 |
| 6-1 | Format of the Segment Selector Component | 6-2 |
| 6-2 | Address Spaces and Task Isolation | 6-3 |
| 6-3 | Segment Descriptor (S=1) | 6-5 |
| 6-4 | Special Purpose Descriptors or System Segment Descriptors (S=0) | 6-5 |
| 6-5 | LDT Descriptor | 6-6 |
| 6-6 | Virtual-to-Physical Address Translation | 6-7 |
| 6-7 | Segment Descriptor Access Bytes | 6-8 |
| 6-8 | Memory Management Registers | 6-9 |

| | | |
|------|--|------|
| 6-9 | Descriptor Loading | 6-10 |
| 7-1 | Addressing Segments of a Module Within a Task | 7-3 |
| 7-2 | Descriptor Cache Registers | 7-4 |
| 7-3 | iAPX 286 Virtual Address Space | 7-6 |
| 7-4 | Local and Global Descriptor Table Definition | 7-7 |
| 7-5 | Error Code Format (on the Stack) | 7-7 |
| 7-6 | Code and Data Segments Assigned to a Privilege Level | 7-9 |
| 7-7 | Selector Fields | 7-11 |
| 7-8 | Access Byte Example | 7-12 |
| 7-9 | Pointer Privilege Stamping | 7-15 |
| 7-10 | Gate Descriptor Format | 7-17 |
| 7-11 | Call Gate | 7-19 |
| 7-12 | Stack Contents After an Inter-Level Call | 7-21 |
| 8-1 | Task State Segment and TSS Registers | 8-2 |
| 8-2 | TSS Descriptor | 8-4 |
| 8-3 | Task Gate Descriptor | 8-8 |
| 8-4 | Task Switch Through a Task Gate | 8-9 |
| 9-1 | Interrupt Descriptor Table Definition | 9-1 |
| 9-2 | IDT Selector Error Code | 9-2 |
| 9-3 | Trap/Interrupt Gate Descriptors | 9-4 |
| 9-4 | Stack Layout After an Exception with an Error Code | 9-5 |
| 10-1 | Local and Global Descriptor Table Definition | 10-2 |
| 10-2 | Interrupt Descriptor Table Definition | 10-2 |
| 10-3 | Data Type for Global Descriptor Table and Interrupt Descriptor Table | 10-3 |
| 11-1 | Expand-Down Segment | 11-2 |
| 11-2 | Dynamic Segment Relocation and Expansion of Segment Limit | 11-3 |
| 11-3 | Example of NPX Context Switching | 11-6 |
| B-1 | /n Instruction Byte Format | B-2 |
| B-2 | /r Instruction Byte Format | B-4 |

Tables

| Table | Title | Page |
|-------|---|------|
| 2-1 | Implied Segment Usage by Index, Pointer, and Base Registers | 2-11 |
| 2-2 | Segment Register Selection Rules | 2-18 |
| 2-3 | Memory Operand Addressing Modes | 2-22 |
| 2-4 | iAPX 286 Interrupt Vector Assignments (Real Address Mode) | 2-24 |
| 3-1 | Status Flags' Functions | 3-7 |
| 3-2 | Control Flags' Functions | 3-7 |
| 3-3 | Interpretation of Conditional Transfers | 3-21 |
| 5-1 | Interrupt Processing Order | 5-4 |
| 5-2 | Dedicated and Reserved Interrupt Vectors in Real Address Mode | 5-6 |
| 5-3 | Processor State After RESET | 5-7 |
| 7-1 | Segment Access Rights Byte Format | 7-11 |
| 7-2 | Allowed Segment Types in Segment Registers | 7-12 |
| 7-3 | Call Gate Checks | 7-18 |
| 7-4 | Inter-Level Return Checks | 7-22 |
| 8-1 | Checks Made During a Task Switch | 8-6 |
| 8-2 | Effect of a Task Switch on BUSY and NT Bits and the Link Word | 8-7 |

| | | |
|------|---|------|
| 9-1 | Trap and Interrupt Gate Checks | 9-6 |
| 9-2 | Interrupt and Gate Interactions | 9-7 |
| 9-3 | Reserved Exceptions and Interrupts | 9-9 |
| 9-4 | Interrupt Processing Order | 9-10 |
| 9-5 | Conditions That Invalidate the TSS | 9-11 |
| 10-1 | MSW Bit Functions | 10-4 |
| 10-2 | Recommended MSW Encodings for Processor Extension Control | 10-5 |
| 11-1 | NPX Context Switching | 11-7 |
| B-1 | ModRM Values | B-3 |
| B-2 | Protection Exceptions of the iAPX 286 | B-7 |
| B-3 | Hexadecimal Values for the Access Rights Byte | B-13 |
| D-1 | New iAPX 286 Interrupts | D-1 |

*Introduction To
iAPX 286*

1

CHAPTER 1

INTRODUCTION TO iAPX 286

The iAPX 286 is the most powerful processor in the iAPX 86 series of microprocessors, which includes the iAPX 86 (8086), the iAPX 88 (8088), the iAPX 186 (80186), and now the iAPX 286 (80286). It is designed for applications that require very high performance. It is also an excellent choice for sophisticated "high end" applications that will benefit from its advanced architectural features: memory management, protection mechanisms, task management, and virtual memory support. The iAPX 286 provides, on a single VLSI chip, computational and architectural characteristics normally associated with much larger minicomputers.

Sections 1.1, 1.2, and 1.3 provide an overview of the iAPX 286 architecture. Because the iAPX 286 represents a revolutionary extension of the iAPX 86 architecture, some of this overview material may be new and unfamiliar to previous users of the iAPX 86 and similar microprocessors. But the iAPX 286 is also an evolutionary development, with the new architecture superimposed upon the industry standard iAPX 86 in such a way as to affect only the design and programming of operating systems and other such system software. Section 1.4 provides a guide to the organization of this manual, suggesting which chapters are relevant to the needs of particular readers.

1.1 GENERAL ATTRIBUTES

The iAPX 286 base architecture has many features in common with the architecture of other members of the iAPX 86 family, such as byte addressable memory, I/O interfacing hardware, interrupt vectoring, and support for both multiprocessing and processor extensions. The entire family has a common set of addressing modes and basic instructions. The

iAPX 286 base architecture also includes a number of extensions which add to the versatility of the computer.

The iAPX 286 processor can function in two modes of operation (see section 1.2, Modes of Operation). In one of these modes only the base architecture is available to programmers, whereas in the other mode a number of very powerful advanced features have been added, including support for virtual memory, multitasking, and a sophisticated protection mechanism. These advanced features are described in section 1.3.

The iAPX 286 base architecture was designed to support programming in high-level languages, such as Pascal, C or PL/M. The register set and instructions are well suited to compiler-generated code. The addressing modes (see section 2.6.3) allow efficient addressing of complex data structures, such as static and dynamic arrays, records, and arrays within records, which are commonly supported by high-level languages. The data types supported by the architecture include, along with bytes and words, high level language constructs such as strings, BCD, and floating point.

The memory architecture of the iAPX 286 was designed to support modular programming techniques. Memory is divided into segments, which may be of arbitrary size, that can be used to contain procedures and data structures. Segmentation has several advantages over more conventional linear memory architectures. It supports structured software, since segments can contain meaningful program units and data, and more compact code, since references within a segment can be shorter (and locality of reference usually

insures that the next few references will be within the same segment). Segmentation also lends itself to efficient implementation of sophisticated memory management, virtual memory, and memory protection.

In addition, new instructions have been added to the base architecture to give hardware support for procedure invocations, parameter passing, and array bounds checking.

1.2 MODES OF OPERATION

The iAPX 286 can be operated in either of two different modes: Real Address Mode or Protected Virtual Address Mode (also referred to as Protected Mode). In either mode of operation, the iAPX 286 represents an upwardly compatible addition to the iAPX 86 family of processors.

In Real Address Mode, the iAPX 286 operates essentially as a very high-performance iAPX 86 (8086). Programs written for the iAPX 86 or the iAPX 186 can be executed in this mode without any modification (the few exceptions are described in Appendix D, "Compatibility Considerations"). Such upward compatibility extends even to the object code level; for example, an 8086 program stored in read-only memory will execute successfully in iAPX 286 Real Address Mode. An iAPX 286 operating in Real Address Mode provides a number of instructions not found on the iAPX 86. These additional instructions, also present with the iAPX 186, allow for efficient subroutine linkage, parameter validation, index calculations, and block I/O transfers.

The advanced architectural features and full capabilities of the iAPX 286 are realized in its native Protected Mode. Among these features are sophisticated mechanisms to support data protection, system integrity, task concurrency, and memory management,

including virtual storage. Nevertheless, even in Protected Mode, the iAPX 286 remains upwardly compatible with most iAPX 86 and iAPX 186 application programs. Most iAPX 86 applications programs can be re-compiled or re-assembled and executed on the iAPX 286 in Protected Mode.

1.3 ADVANCED FEATURES

The architectural features described in section 1.1 are common to both operating modes of the processor. In addition to these common features, Protected Mode provides a number of advanced features, including a greatly extended physical and logical address space, new instructions, and support for additional hardware-recognized data structures. The Protected Mode iAPX 286 includes a sophisticated memory management and multilevel protection mechanism. Full hardware support is included for multitasking and task switching operations.

1.3.1 Memory Management

The memory architecture of the Protected Mode iAPX 286 represents a significant advance over that of the iAPX 86. The physical address space has been increased from 1 megabyte to 16 megabytes (2^{24} bytes), while the virtual address space (i.e., the address space visible to a program) has been increased from 1 megabyte to 1 gigabyte (2^{30} bytes). Moreover, separate virtual address spaces are provided for each task in a multitasking system (see section 1.3.2, "Task Management").

The iAPX 286 supports on-chip memory management instead of relying on an external memory management unit. The one-chip solution is preferable because no software is required to manage an external memory management unit, performance is much better, and hardware designs are significantly simpler.

Mechanisms have been included in the iAPX 286 architecture to allow the efficient implementation of virtual memory systems. (In virtual memory systems, the user regards the combination of main and external storage as a single large memory. The user can write large programs without worrying about the physical memory limitations of the system. To accomplish this, the operating system places some of the user programs and data in external storage and brings them into main memory only as they are needed.) All instructions that can cause a segment-not-present fault are fully restartable. Thus, a not-present segment can be loaded from external storage, and the task can be restarted at the point where the fault occurred.

The iAPX 286, like all members of the iAPX 86 series, supports a segmented memory architecture. The iAPX 286 also fully integrates memory segmentation into a comprehensive protection scheme. This protection scheme includes hardware-enforced length and type checking to protect segments from inadvertent misuse.

1.3.2 Task Management

The iAPX 286 is designed to support multi-tasking systems. The architecture provides direct support for the concept of a task. For example, task state segments (see section 8.2) are hardware-recognized and hardware-manipulated structures that contain information on the current state of all tasks in the system.

Very efficient context-switching (task-switching) can be invoked with a single instruction. Separate logical address spaces are provided for each task in the system. Finally, mechanisms exist to support inter-task communication, synchronization, memory sharing, and task scheduling. Task Management is described in Chapter 8.

1.3.3 Protection Mechanisms

The iAPX 286 allows the system designer to define a comprehensive protection policy to be applied, uniformly and continuously, to all ongoing operations of the system. Such a policy may be desirable to ensure system reliability, privacy of data, rapid error recovery, and separation of multiple users.

The iAPX 286 protection mechanisms are based on the notion of a "hierarchy of trust." Four privilege levels are distinguished, ranging from Level 0 (most trusted) to Level 3 (least trusted). Level 0 is usually reserved for the operating system kernel. The four levels may be visualized as concentric rings, with the most privileged level in the center (see figure 1-1).

This four-level scheme offers system reliability, flexibility, and design options not possible with the typical two-level (supervisor/user) separation provided by other processors. A four-level division is capable of separating kernel, executive, system services, and application software, each with different privileges.

At any one time, a task executes at one of the four levels. Moreover, all data segments and code segments are also assigned to privilege levels. A task executing at one level cannot access data at a more privileged level, nor can it call a procedure at a less privileged level (i.e., trust a less privileged procedure to do work for it). Thus, both access to data and transfer of control are restricted in appropriate ways.

A complete separation can exist between the logical address spaces local to different tasks, providing users with automatic protection against accidental or malicious interference by other users. The hardware also provides immediate detection of a number of fault and

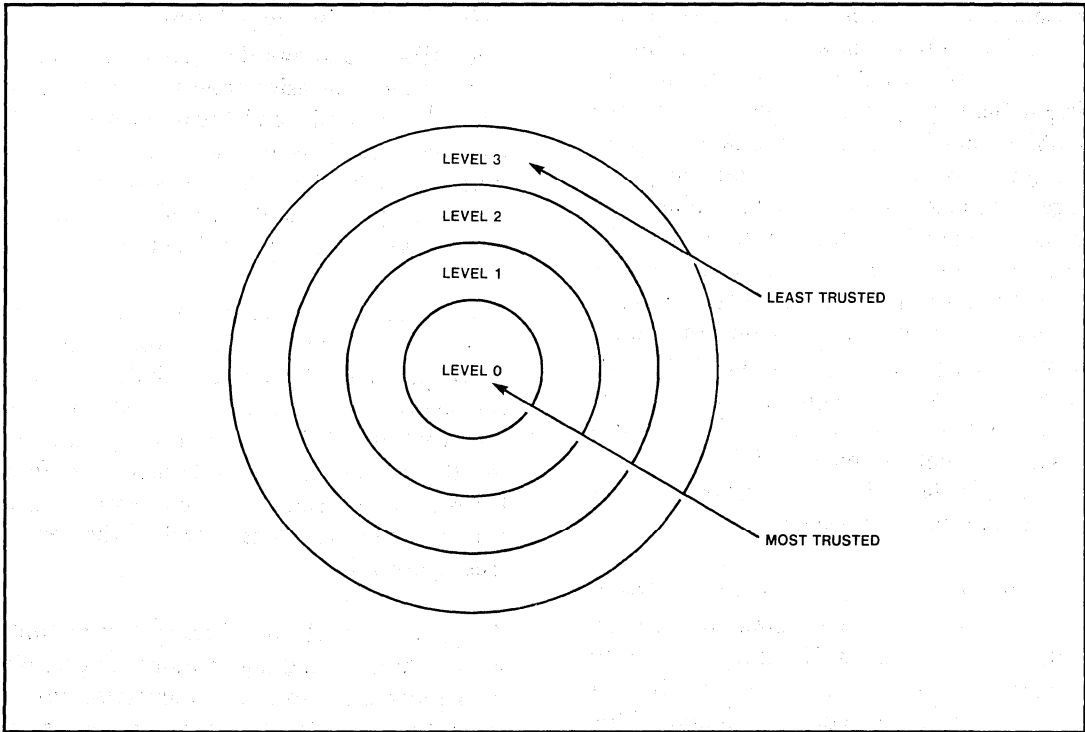


Figure 1-1. Four Privilege Levels

error conditions, a feature that can be useful in the development and maintenance of software.

Finally, these protection mechanisms require relatively little system overhead because they are integrated into the memory management and protection hardware of the processor itself.

1.3.4 Support for Operating Systems

Most operating systems involve some degree of concurrency, with multiple tasks vying for system resources. The task management mechanisms described above provide the iAPX 286 with inherent support for such multi-tasking systems. Moreover, the advanced memory management features of the iAPX 286 allow the implementation of sophisticated virtual memory systems.

Operating system implementors have found that a multi-level approach to system services provides better security and more reliable systems. For example, a very secure kernel might implement critical functions such as task scheduling and resource allocation, while less fundamental functions (such as I/O) are built around the kernel. This layered approach also makes program development and enhancement simpler and facilitates error detection and debugging. The iAPX 286 supports the layered approach through its four-level privilege scheme.

1.4 ORGANIZATION OF THIS MANUAL

To facilitate the use of this manual both as an introduction to the iAPX 286 architecture and as a reference guide, the remaining chapters are divided into three major parts.

Part I, comprising chapters 2 through 4, should be read by all those who wish to acquire a basic familiarity with the iAPX 286 architecture. These chapters provide detailed information on memory segmentation, registers, addressing modes and the general (application level) iAPX 286 instruction set. In conjunction with the *iAPX 286 Assembly Language Reference Manual*, these chapters provide sufficient information for an assembly language programmer to design and write application programs.

The chapters in Part I are:

Chapter 2, "Architectural Features." This chapter discusses those features of the iAPX 286 architecture that are significant for application programmers. The information presented can also function as an introduction to the machine for system programmers. Memory organization and segmentation, processor registers, addressing modes, and instruction formats are all discussed.

Chapter 3, "Basic Instruction Set." This chapter presents the core instructions of the iAPX 86 family.

Chapter 4, "Extended Instruction Set." This chapter presents the extended instructions shared by the iAPX 186 and iAPX 286 processors.

Part II of the manual consists of a single chapter:

Chapter 5, "Real Address Mode." This chapter presents the system programmer's view of the iAPX 286 when the processor is operated in Real Address Mode.

Part III of the manual comprises chapters 6 through 11. Aimed primarily at system programmers, these chapters discuss the more advanced architectural features of the iAPX

286, which are available when the processor is in Protected Mode. Details on memory management, protection mechanisms, and task switching are provided.

The chapters in Part III are:

Chapter 6, "Virtual Memory." This chapter describes the iAPX 286 address translation mechanisms that support virtual memory. Segment descriptors, global and local descriptor tables, and descriptor caches are discussed.

Chapter 7, "Protection." This chapter describes the protection features of the iAPX 286. Privilege levels, segment attributes, access restrictions, and call gates are discussed.

Chapter 8, "Tasks and State Transitions." This chapter describes the iAPX 286 mechanisms that support concurrent tasks. Context-switching, task state segments, task gates, and interrupt tasks are discussed.

Chapter 9, "Interrupts, Traps and Faults." This chapter describes interrupt and trap handling. Special attention is paid to the exception traps, or faults, which may occur in Protected Mode. Interrupt gates, trap gates, and the interrupt descriptor table are discussed.

Chapter 10, "System Control and Initialization." This chapter describes the actual instructions used to implement the memory management, protection, and task support features of the iAPX 286. System registers, privileged instructions, and the initial machine state are discussed.

Chapter 11, "Advanced Topics." This chapter completes Part III with a description of several advanced topics, including special segment attributes and pointer validation.

1.5 RELATED PUBLICATIONS

The following manuals also contain information of interest to programmers of iAPX 286/20 systems:

- *Introduction to the iAPX 286*, order number 210308
- *ASM286 Assembly Language Reference Manual*, order number 121924
- *iAPX 286 Operating System Writer's Guide*, order number 121960
- *iAPX 286 Hardware Reference Manual*, order number 210760
- *Microprocessor and Peripheral Handbook*, order number 210844
- *PL/M-286 User's Guide*, order number 121945
- *80287 Support Library Reference Manual*, order number 122129
- *8086 Software Toolbox Manual*, order number 122203 (includes information about 80287 Emulator Software)

iAPX 286 Base Architecture

2

CHAPTER 2

iAPX 286 BASE ARCHITECTURE

This chapter describes the iAPX 286 application programming environment as seen by assembly language programmers. It is intended to introduce the programmer to those features of the iAPX 286 architecture that directly affect the design and implementation of iAPX 286 application programs.

2.1 MEMORY ORGANIZATION AND SEGMENTATION

The main memory of an iAPX 286 system makes up its physical address space. This address space is organized as a sequence of 8-bit quantities, called bytes. Each byte is assigned a unique address ranging from 0 up to a maximum of 2^{20} (1 megabyte) in Real Address Mode, and up to 2^{24} (16 megabytes) in Protected Mode.

A virtual address space is the organization of memory as viewed by a program. Virtual address space is also organized in units of bytes. (Other addressable units such as words, strings, and BCD digits are described below in section 2.2, "Data Types.") In Real Address Mode, as with the 8086 itself, programs view physical memory directly, inasmuch as they manipulate pure physical addresses. Thus, the virtual address space is identical to the physical address space (1 megabyte).

In Protected Mode, however, programs have no direct access to physical addresses. Instead, memory is viewed as a much larger virtual address space of 2^{30} bytes (1 gigabyte). This 1 gigabyte virtual address is mapped onto the Protected Mode's 16-megabyte physical address space by the address translation mechanisms described in Chapter 6.

The programmer views the virtual address space on the iAPX 286 as a collection of up to sixteen thousand linear subspaces, each with a specified size or length. Each of these linear address spaces is called a segment. A segment is a logical unit of contiguous memory. Segment sizes may range from one byte up to 64K (65,536) bytes.

iAPX 286 memory segmentation supports the logical structure of programs and data in memory. Programs are not written as single linear sequences of instructions and data, but rather as modules of code and data. For example, program code may include a main routine and several separate procedures. Data may also be organized into various data structures, some private and some shared with other programs in the system. Run-time stacks constitute yet another data requirement. Each of these several modules of code and data, moreover, may be very different in size or vary dynamically with program execution.

Segmentation supports this logical structure (see figure 2-1). Each meaningful module of a program may be separately contained in individual segments. The degree of modularization, of course, depends on the requirements of a particular application. Use of segmentation benefits almost all applications. Programs execute faster and require less space. Segmentation also simplifies the design of structured software.

2.2 DATA TYPES

Bytes and words are the fundamental units in which the iAPX 286 manipulates data, i.e., the fundamental data types.



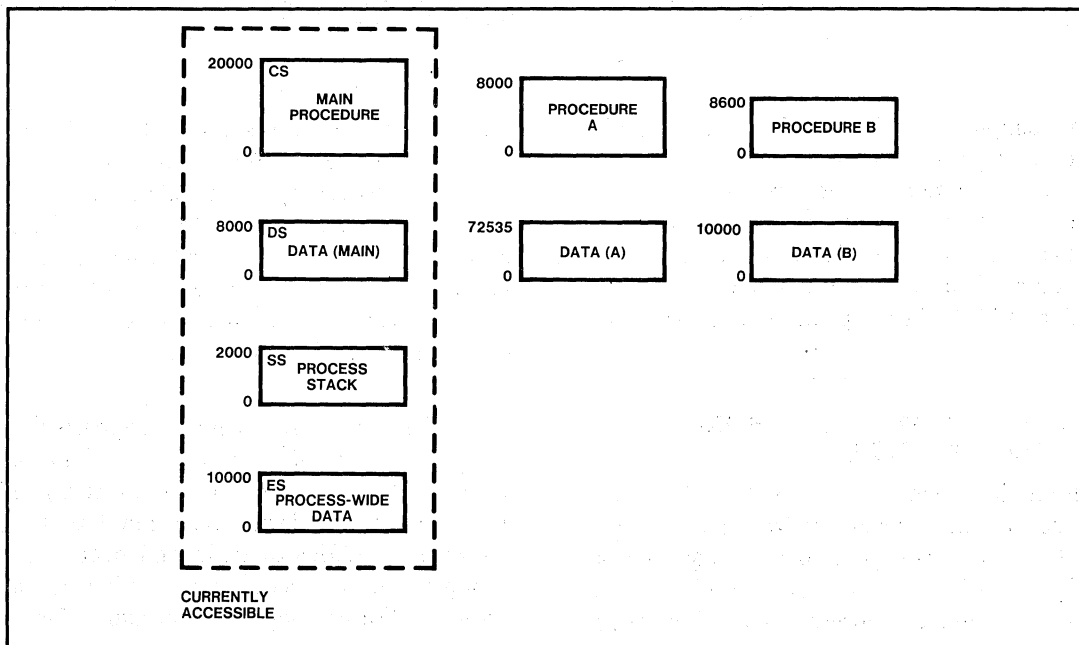


Figure 2-1. Segmented Virtual Memory

A byte is 8 contiguous bits starting on an addressable byte boundary. The bits are numbered 0 through 7, starting from the right. Bit 7 is the most significant bit:



A word is defined as two contiguous bytes starting on an arbitrary byte boundary; a word thus contains 16 bits. The bits are numbered 0 through 15, starting from the right. Bit 15 is the most significant bit. The byte containing bit 0 of the word is called the low byte; the byte containing bit 15 is called the high byte.



Each byte within a word has its own particular address, and the smaller of the two addresses is used as the address of the word. The byte at this lower address contains the eight least significant bits of the word, while the byte at the higher address contains the eight most significant bits. The arrangement of bytes within words is illustrated in figure 2-2.

Note that a word need not be aligned at an even-numbered byte address. This allows maximum flexibility in data structures (e.g., records containing mixed byte and word entries) and efficiency in memory utilization. Although actual transfers of data between the processor and memory take place at physically aligned word boundaries, the iAPX 286 converts requests for unaligned words into the appropriate sequences of requests acceptable to the memory interface. Such odd aligned word transfers, however, may impact performance by requiring two memory cycles

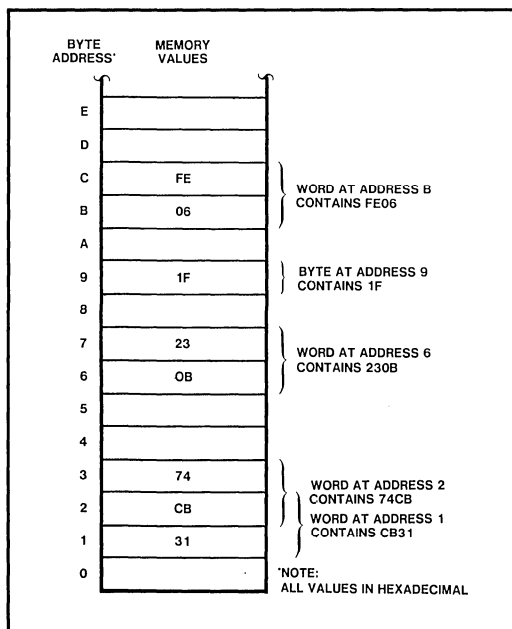


Figure 2-2. Bytes and Words in Memory

to transfer the word rather than one. Data structures (e.g., stacks) should therefore be designed in such a way that word operands are aligned on word boundaries whenever possible for maximum system performance. Due to instruction prefetching and queuing within the CPU, there is no requirement for instructions to be aligned on word boundaries and no performance loss if they are not.

Although bytes and words are the fundamental data types of operands, the processor also supports additional interpretations on these bytes or words. Depending on the instruction referencing the operand, the following additional data types can be recognized:

Integer:

A signed binary numeric value contained in an 8-bit byte or a 16-bit word. All operations assume a 2's complement representation. (Signed 32- and 64-bit integers are supported using the iAPX 286/20 Numeric Data Processor.)

Ordinal:

An unsigned binary numeric value contained in an 8-bit byte or 16-bit word.

Pointer:

A 32-bit address quantity composed of a segment selector component and an offset component. Each component is a 16-bit word.

String:

A contiguous sequence of bytes or words. A string may contain from 1 byte to 64K bytes.

ASCII:

A byte representation of alphanumeric and control characters using the ASCII standard of character representation.

BCD:

A byte (unpacked) representation of the decimal digits (0-9).


Packed BCD:

A byte (packed) representation of two decimal digits (0-9). One digit is stored in each nibble of the byte.

Floating Point:

A signed 32-, 64-, or 80-bit real number representation. (Floating operands are supported using the iAPX 286/20 Numeric Processor Configuration.)

Figure 2-3 graphically represents the data types supported by the iAPX 286. iAPX 286 arithmetic operations may be performed on five types of numbers: unsigned binary, signed binary (integers), unsigned packed decimal, unsigned unpacked decimal, and floating point. Binary numbers may be 8 or 16 bits

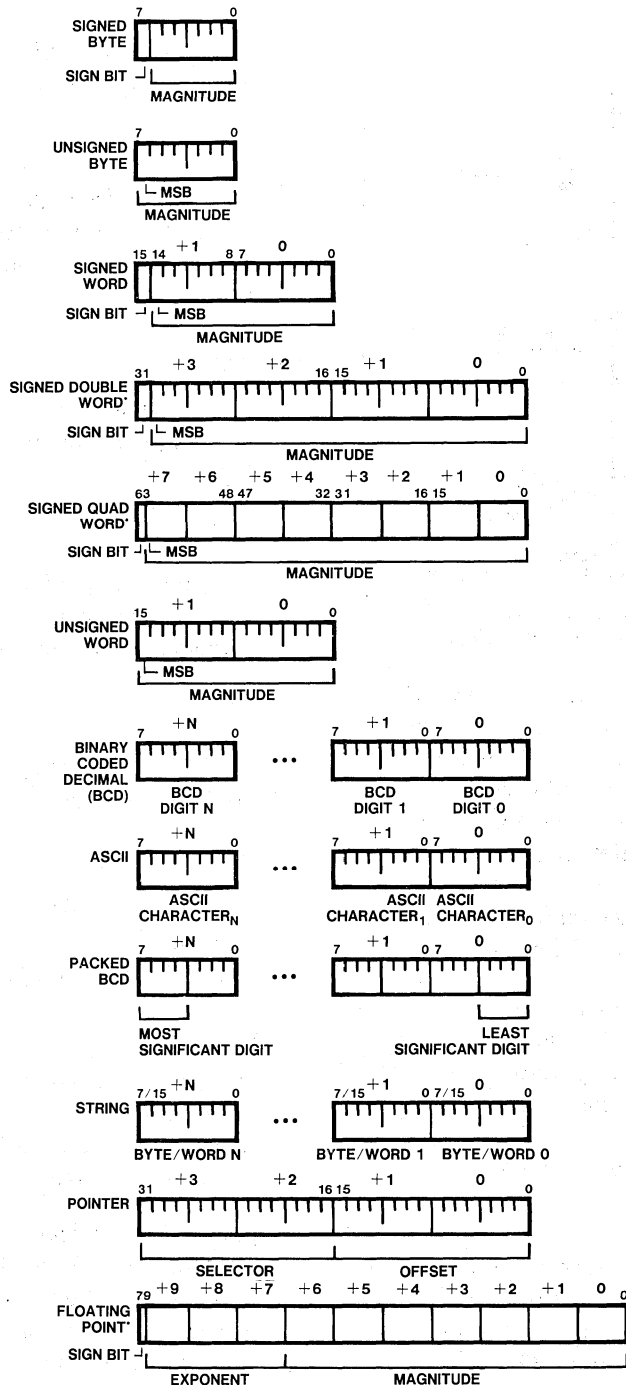

*SUPPORTED BY
IAPX 286/20
NUMERIC DATA
PROCESSOR
CONFIGURATION

Figure 2-3. IAPX 286 Supported Data Types

long. Decimal numbers are stored in bytes; two digits per byte for packed decimal, one digit per byte for unpacked decimal. The processor always assumes that the operands specified in arithmetic instructions contain data that represent valid numbers for the type of instruction being performed. Invalid data may produce unpredictable results.

Unsigned binary numbers may be either 8 or 16 bits long; all bits are considered in determining a number's magnitude. The value range of an 8-bit unsigned binary number is 0-255; 16 bits can represent values from 0 through 65,535. Addition, subtraction, multiplication and division operations are available for unsigned binary numbers.

Signed binary numbers (integers) may be either 8 or 16 bits long. The high-order (leftmost) bit is interpreted as the number's sign: 0=positive and 1=negative. Negative numbers are represented in standard two's complement notation. Since the high-order bit is used for a sign, the range of an 8-bit integer is -128 through +127; 16-bit integers may range from -32,768 through +32,767. The value zero has a positive sign.

Separate multiplication and division operations are provided for both signed and unsigned binary numbers. The same addition and subtraction instructions are used with signed or unsigned binary values. Conditional jump instructions, as well as an "interrupt on overflow" instruction, can be used following an unsigned operation on an integer to detect overflow into the sign bit.

Unpacked decimal numbers are stored as unsigned byte quantities. One digit is stored in each byte. The magnitude of the number is determined from the low-order half-byte; hexadecimal values 0-9 are valid and are interpreted as decimal numbers. The high-

order half-byte must be zero for multiplication and division; it may contain any value for addition and subtraction.

Arithmetic on unpacked decimal numbers is performed in two steps. The unsigned binary addition, subtraction and multiplication operations are used to produce an intermediate result. An adjustment instruction then changes the value to a final correct unpacked decimal number. Division is performed similarly, except that the adjustment is carried out on the two digit numerator operand in register AX first, followed by an unsigned binary division instruction that produces a correct result.

Unpacked decimal numbers are similar to the ASCII character representations of the digits 0-9. Note, however, that the high-order half-byte of an ASCII numeral is always 3. Unpacked decimal arithmetic may be performed on ASCII numeric characters under the following conditions:

- the high-order half-byte of an ASCII numeral must be set to 0H prior to multiplication or division.
- unpacked decimal arithmetic leaves the high-order half-byte set to 0H; it must be set to 3 to produce a valid ASCII numeral.

Packed decimal numbers are stored as unsigned byte quantities. The byte is treated as having one decimal digit in each half-byte (nibble); the digit in the high-order half-byte is the most significant. Values 0-9 are valid in each half-byte, and the range of a packed decimal number is 0-99. Additions and subtractions are performed in two steps. First, an addition or subtraction instruction is used to produce an intermediate result. Then, an adjustment operation is performed which changes the intermediate value to a final

correct packed decimal result. Multiplication and division adjustments are only available for unpacked decimal numbers.

Pointers and addresses are described below in section 2.3.3, "Index, Pointer, and Base Registers," and in section 3.8, "Address Manipulation Instructions."

Strings are contiguous bytes or words from 1 to 64K bytes in length. They generally contain ASCII or other character data representations. The iAPX 286 provides string manipulation instructions to move, examine, or modify a string (see section 3.7, "Character Translation and String Instructions").

If the 80287 numerics processor extension (NPX) is present in the system (the iAPX 286/20 configuration)— see Numeric Supplement following Appendix D—the iAPX 286 architecture also supports floating point numbers, 32- and 64-bit integers, and 18-digit BCD data types.

The iAPX 286/20 Numeric Data Processor supports and stores real numbers in a three-field binary format as required by IEEE standard 754 for floating point numerics (see figure 2-3). The number's significant digits are held in the significand field, the exponent field locates the binary point within the significant digits (and therefore determines the number's magnitude), and the sign field indicates whether the number is positive or negative. (The exponent and significand are analogous to the terms "characteristic" and "mantissa," typically used to describe floating point numbers on some computers.) This format is used by the iAPX 286/20 with various length significands and exponents to support single precision, double precision and extended (80-bit) precision floating point data types. Negative numbers differ from positive numbers only in their sign bits.

2.3 REGISTERS

The iAPX 286 contains a total of fourteen registers that are of interest to the application programmer. (Five additional registers used by system programmers are covered in section 10.1.) As shown in figure 2-4, these registers may be grouped into four basic categories:

- General registers. These eight 16-bit general-purpose registers are used primarily to contain operands for arithmetic and logical operations.
- Segment registers. These four special-purpose registers determine, at any given time, which segments of memory are currently addressable.
- Status and Control registers. These three special-purpose registers are used to record and alter certain aspects of the iAPX 286 processor state.

2.3.1 General Registers

The general registers of the iAPX 286 are the 16-bit registers AX, BX, CX, DX, SP, BP, SI, and DI. These registers are used interchangeably to contain the operands of logical and arithmetic operations.

Some instructions and addressing modes (see section 2.4), however, dedicate certain general registers to specific uses. BX and BP are often used to contain the base address of data structures in memory (for example, the starting address of an array); for this reason, they are often referred to as the *base registers*. Similarly, SI and DI are often used to contain an index value that will be incremented to step through a data structure; these two registers are called the *index registers*. Finally, SP and BP are used for stack manipulation. Both SP and BP normally contain offsets into the current stack. SP generally contains the offset of the top of the stack and BP contains the

offset or base address of the current stack frame. The use of these general-purpose registers for operand addressing is discussed in section 2.3.3, "Index, Pointer, and Base Registers." Register usage for individual instructions is discussed in chapters 3 and 4.

As shown in figure 2-4, eight byte registers overlap four of the 16-bit general registers. These registers are named AH, BH, CH, and DH (high bytes); and AL, BL, CL, and DL (low bytes); they overlap AX, BX, CX, and DX. These registers can be used either in their entirety or as individual 8-bit registers. This dual interpretation simplifies the handling of both 8- and 16-bit data elements.

2.3.2 Memory Segmentation and Segment Registers

Complete programs generally consist of many different code modules (or segments), and different types of data segments. However, at any given time during program execution, only a small subset of a program's segments

are actually in use. Generally, this subset will include code, data, and possibly a stack. The iAPX 286 architecture takes advantage of this by providing mechanisms to support direct access to the working set of a program's execution environment and access to additional segments on demand.

At any given instant, four segments of memory are immediately accessible to an executing iAPX 286 program. The segment registers DS, ES, SS, and CS are used to identify these four current segments. Each of these registers specifies a particular kind of segment, as characterized by the associated mnemonics ("code," "stack," "data," or "extra") shown in figure 2-4.

An executing program is provided with concurrent access to the four individual segments of memory—a code segment, a stack segment, and two data segments—by means of the four segment registers. Each may be said to select a segment, since it uniquely

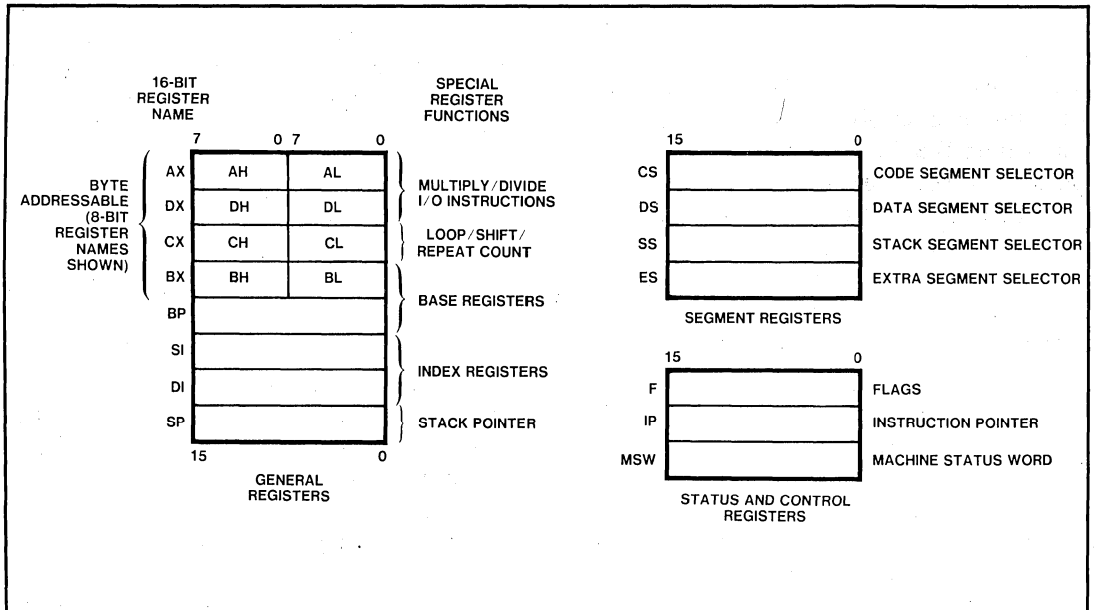


Figure 2-4. IAPX 286 Base Architecture Register Set

determines the one particular segment from among the numerous segments in memory, which is to be immediately accessible at highest speed. Thus, the 16-bit contents of a segment register is called a segment selector.

Once a segment is selected, a base address is associated with it. To address an element within a segment, a 16-bit offset from the segment's base address must be supplied. The 16-bit segment selector and the 16-bit offset taken together form the high and low order halves, respectively, of a 32-bit virtual address pointer. Once a segment is selected, only the lower 16-bits of the pointer, called the offset, generally need to be specified by an instruction. Simple rules define which segment register is used to form an address when only a 16-bit offset is specified.

An executing program requires, first of all, that its instructions reside somewhere in memory. The segment of memory containing the currently executing sequence of instructions is known as the current code segment; it is specified by means of the CS register. All instructions are fetched from this code segment, using as an offset the contents of the instruction pointer (IP). The CS:IP register combination therefore forms the full 32-bit pointer for the next sequential program instruction. The CS register is manipulated indirectly. Transitions from one code segment to another (e.g., a procedure call) are effected implicitly as the result of control-transfer instructions, interrupts, and trap operations.

Stacks play a fundamental role in the iAPX 286 architecture; subroutine calls, for example, involve a number of implicit stack operations. Thus, an executing program will generally require a region of memory for its stack. The segment containing this region is known as the current stack segment, and it is specified by means of the SS register. All

stack operations are performed within this segment, usually in terms of address offsets contained in the stack pointer (SP) and stack frame base (BP) registers. Unlike CS, the SS register can be loaded explicitly for dynamic stack definition.

Beyond their code and stack requirements, most programs must also fetch and store data in memory. The DS and ES registers allow the specification of two data segments, each addressable by the currently executing program. Accessibility to two separate data areas supports differentiation and access requirements like local procedure data and global process data. An operand within a data segment is addressed by specifying its offset either directly in an instruction or indirectly via index and/or base registers (described in the next subsection).

Depending on the data structure (e.g., the way data is parceled into one or more segments), a program may require access to multiple data segments. To access additional segments, the DS and ES registers can be loaded under program control during the course of a program's execution. This simply requires loading the appropriate data pointer prior to accessing the data.

The interpretation of segment selector values depends on the operating mode of the processor. In Real Address Mode, a segment selector is a physical address (figure 2-5). In Protected Mode, a segment selector selects a segment of the user's virtual address space (figure 2-6). An intervening level of logical-to-physical address translation converts the logical address to a physical memory address. Chapter 6, "Memory Management," provides a detailed discussion of Protected Mode addressing. In general, considerations of selector formats and the details of memory mapping need not concern the application programmer.

iAPX 286 BASE ARCHITECTURE

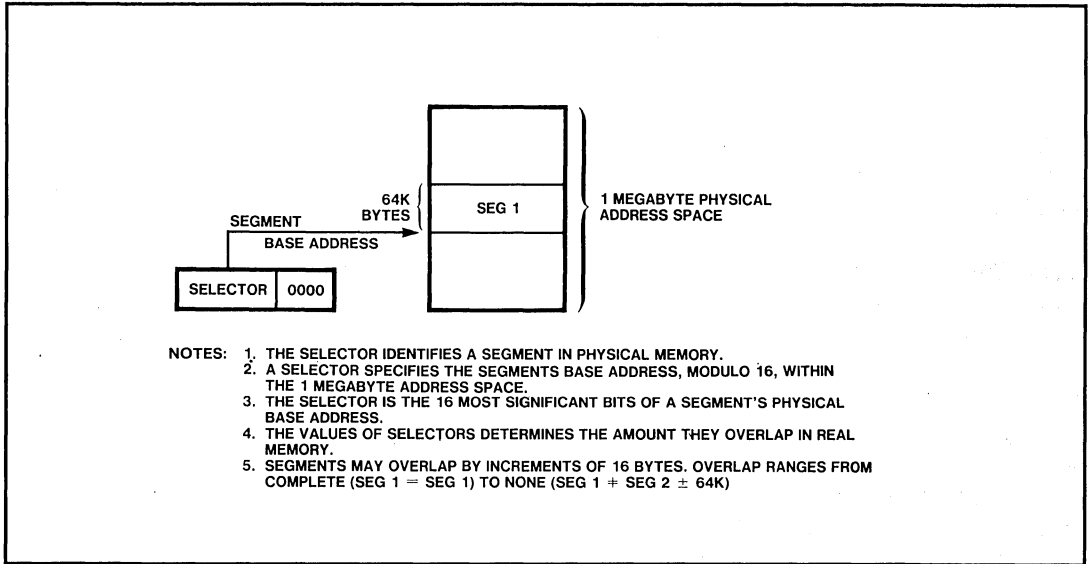


Figure 2-5. Real Address Mode Segment Selector Interpretation

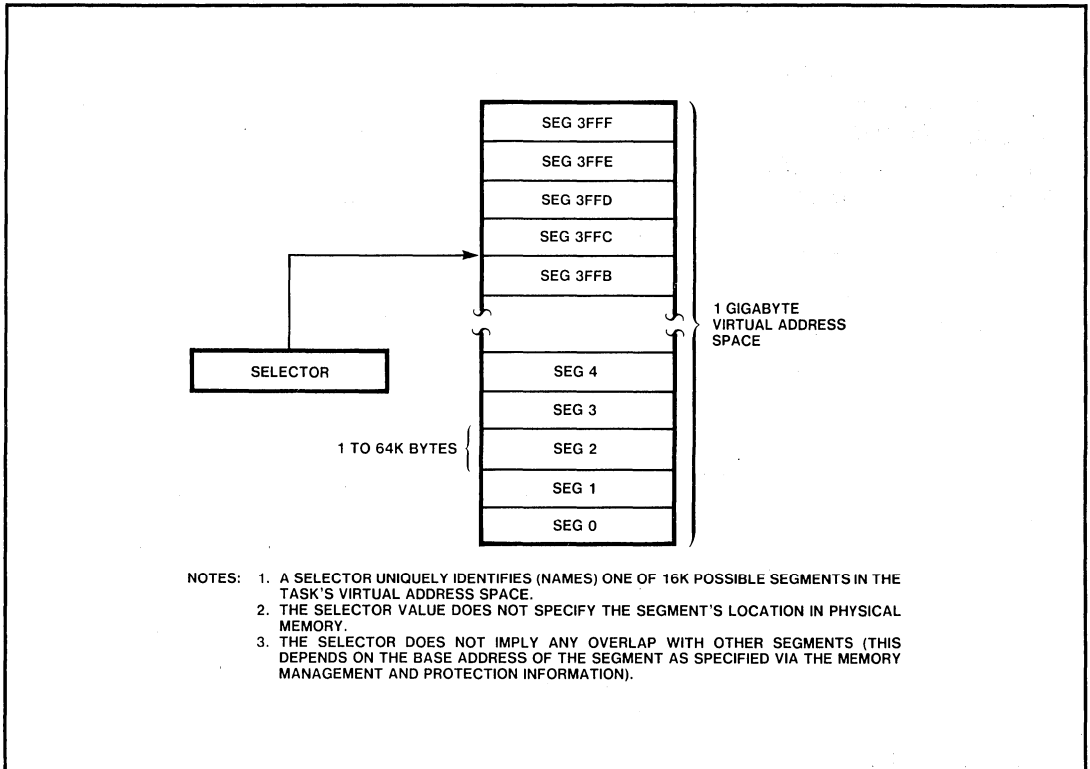


Figure 2-6. Protected Mode Segment Selector Interpretation

2.3.3 Index, Pointer, and Base Registers

Five of the general-purpose registers are available for offset address calculations. These five registers, shown in figure 2-4, are SP, BP, BX, SI, and DI. SP is called a *pointer register*; BP and BX are called *base registers*; SI and DI are called *index registers*.

As described in the previous section, segment registers define the set of four segments currently addressable by a program. A pointer, base, or index register may contain an offset value relative to the start of one of these segments; it thereby points to a particular operand's location within that segment. To allow for efficient computations of effective address offsets, all base and index registers may participate interchangeably as operands in most arithmetical operations.

Stack operations are facilitated by the stack pointer (SP) and stack frame base (BP) registers. By specifying offsets into the current stack segment, each of these registers provides access to data on the stack. The SP register is the customary top-of-stack pointer, addressing the uppermost datum on a push-

down stack. It is referenced implicitly by PUSH and POP operations, subroutine calls, and interrupt operations. The BP register provides yet another offset into the stack segment. The existence of this stack relative base register, in conjunction with certain addressing modes described in section 2.6.3, is particularly useful for accessing data structures, variables and dynamically allocated work space within the stack.

Stacks in the iAPX 286 are implemented in memory and are located by the stack segment register (SS) and the stack pointer register (SP). A system may have an unlimited number of stacks, and a stack may be up to 64K bytes long, the maximum length of a segment.

One stack is directly addressable at a time; this is the current stack, often referred to simply as "the" stack. SP contains the current top of the stack (TOS). In other words, SP contains the offset to the top of the push down stack from the stack segment's base address. Note, however, that the stack's base address (contained in SS) is not the "bottom" of the stack (figure 2-7).

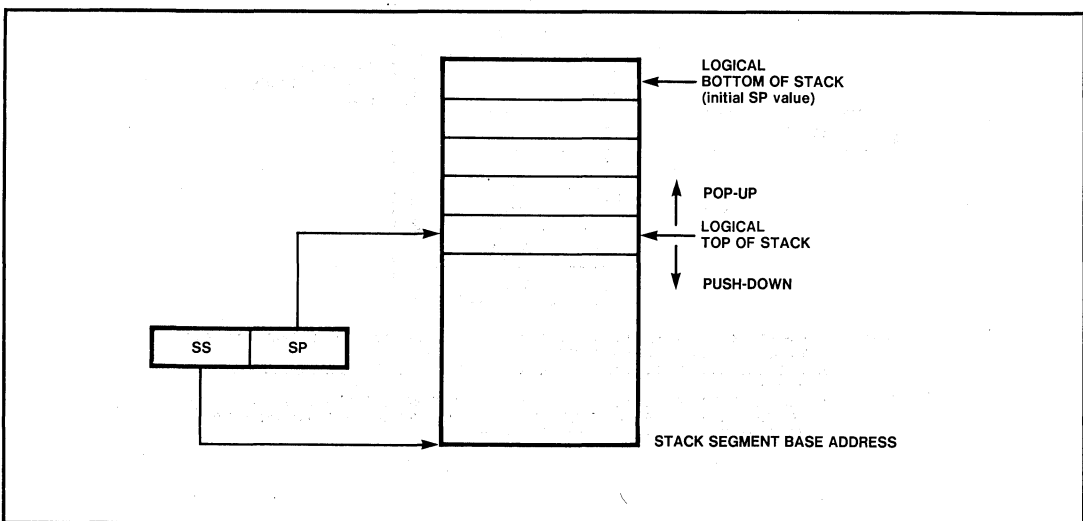


Figure 2-7. iAPX 286 Stack

iAPX 286 stack entries are 16 bits wide. Instructions operate on the stack by adding and removing stack items one word at a time. An item is pushed onto the stack (see figure 2-8) by *decrementing* SP by 2 and writing the item at the new TOS. An item is popped off the stack by copying it from TOS and then *incrementing* SP by 2. In other words, the stack grows *down* in memory toward its base address. Stack operations never move items on the stack; nor do they erase them. The top of the stack changes only as a result of updating the stack pointer.

The stack frame base pointer (BP) is often used to access elements on the stack relative to a *fixed* point on the stack rather than relative to the *current* TOS. It typically identifies the base address of the current stack frame established for the current procedure (figure 2-9). If an index register is used relative to BP (e.g., base + index addressing mode using BP as the base), the offset will be calculated automatically in the current stack segment.

Accessing data structures in data segments is facilitated by the BX register, which has the same function in addressing operands within data segments that BP does for stack segments. They are called base registers because they may contain an offset to the base of a data structure. The similar usage of these two registers is especially important when discussing addressing modes (see section 2.4, "Addressing Modes").

Operations on data are also facilitated by the SI and DI registers. By specifying an offset relative to the start of the currently addressable data segment, an index register can be used to address an operand in the segment. If an index register is used in conjunction with the BX base register (i.e., base + index addressing) to form an offset address, the data

is also assumed to reside in the current data segment. As a rule, data referenced through an index register or BX is presumed to reside in the current data segment. That is, if an instruction invokes addressing for one of its operands using either BX, DI, SI, or BX with SI or DI, the contents of the register(s) (BX, DI, or SI) implicitly specify an offset in the current data segment. As previously mentioned, data referenced via SP, BP or BP with SI or DI implicitly specify an operand in the current stack segment (refer to table 2-1).

There are two exceptions to the rules listed above. The first concerns the operation of certain iAPX 286 string instructions. For the most flexibility, these instructions assume that the DI register addresses destination strings not in the data segment, but rather in the extra segment (ES register). This allows movement of strings between different segments. This has led to the descriptive names "source index" and "destination index." In all cases other than string instructions, however, the SI and DI registers may be used interchangeably to reference either source or destination operands.

Table 2-1. Implied Segment Usage by Index, Pointer, and Base Registers

| Register | Implied Segment |
|-------------|------------------------------|
| SP | SS |
| BP | SS |
| BX | DS |
| SI | DS |
| DI | DS, ES for String Operations |
| BP + SI, DI | SS |
| BX + SI, DI | DS |

NOTE:

All implied Segment usage, except SP to SS and DI to ES for String Operations, may be explicitly specified with a segment override prefix for any of the four segments. The prefix precedes the instruction for which explicit reference is desired.

IAPX 286 BASE ARCHITECTURE

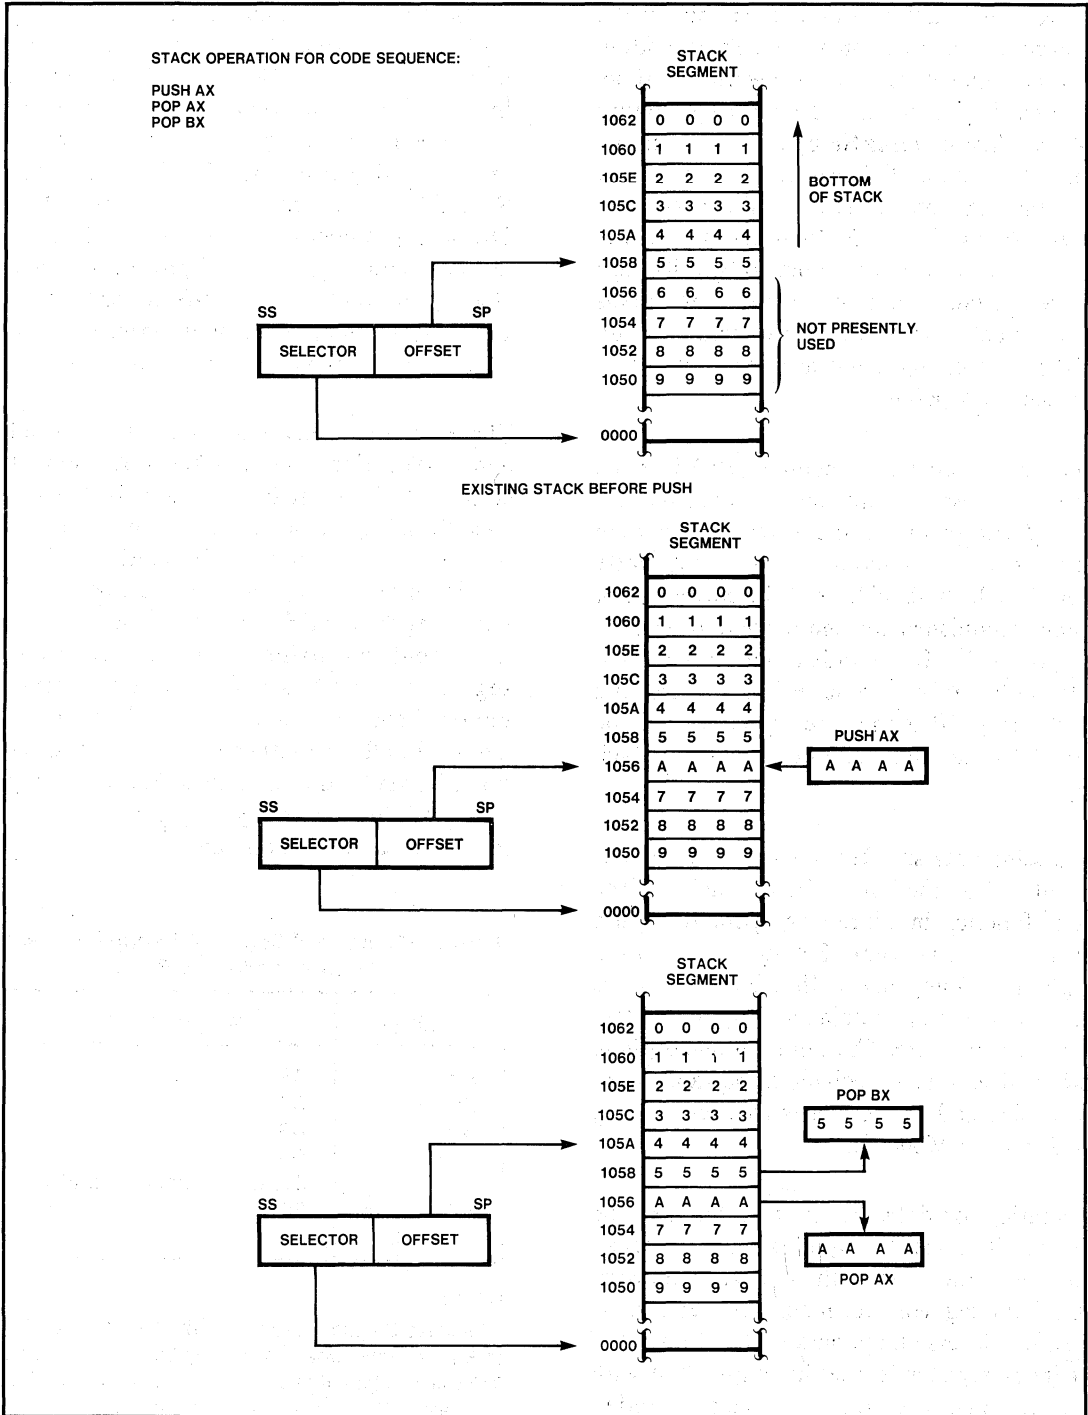


Figure 2-8. Stack Operation

IAPX 286 BASE ARCHITECTURE

BP IS A CONSTANT POINTER TO STACK BASED VARIABLES AND WORK SPACE. ALL REFERENCES USE BP AND ARE INDEPENDENT OF SP, WHICH MAY VARY DURING A ROUTINE EXECUTION.

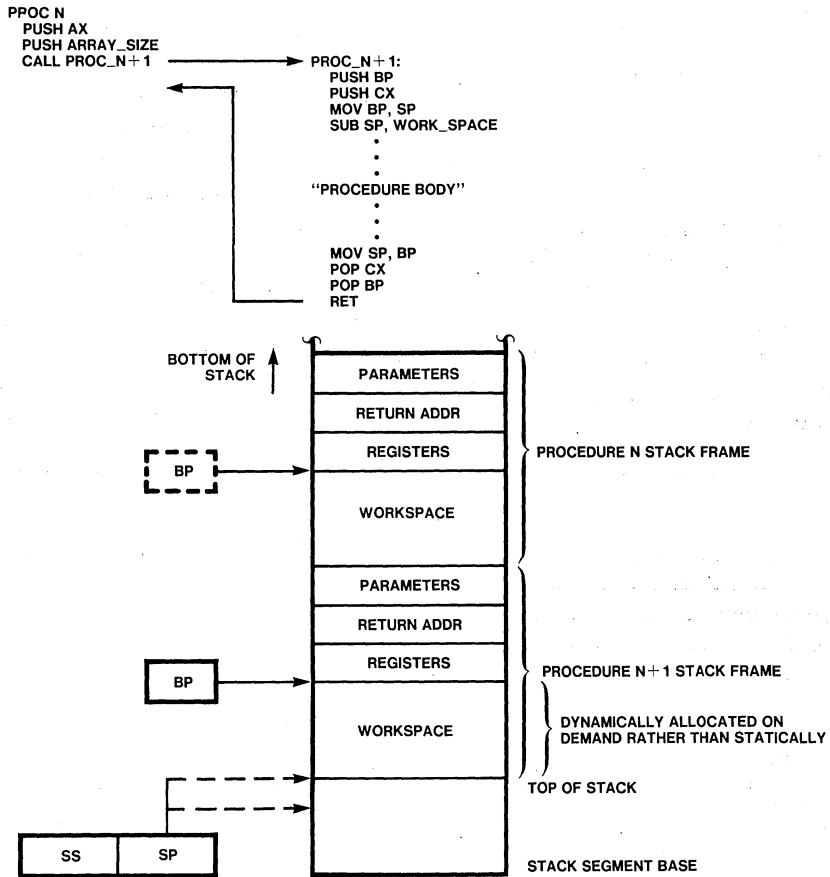


Figure 2-9. BP Usage as a Stack Frame Base Pointer

A second more general override capability allows the programmer complete control of which segment is used for a specific operation. Segment-override prefixes, discussed in section 2.4.3, allow the index and base registers to address data in any of the four currently addressable segments.

2.3.4 Status and Control Registers

Two status and control registers are of immediate concern to applications programmers: the instruction pointer and the FLAGS registers.

The instruction pointer register (IP) contains the offset address, relative to the start of the current code segment, of the next sequential instruction to be executed. Together, the CS:IP registers thus define a 32-bit program-counter. The instruction pointer is not directly visible to the programmer; it is controlled implicitly, by interrupts, traps, and control-transfer operations.

The FLAGS register encompasses eleven flag fields, mostly one-bit wide, as shown in figure 2-10. Six of the flags are status flags that record processor status information. The status flags are affected by the execution of arithmetic and logical instructions. The carry flag is also modifiable with instructions that will clear, set or complement this flag bit. See Chapters 3 and 4.

The carry flag (CF) generally indicates a carry or borrow out of the most significant bit of an 8- or 16-bit operand after performing an arithmetic operation; this flag is also useful for bit manipulation operations involving the shift and rotate instructions. The effect on the remaining status flags, when defined for a particular instruction, is generally as follows: the zero flag (ZF) indicates a zero result when set; the sign flag (SF) indicates whether the result was negative (SF=1) or positive (SF=0); when set, the overflow flag (OF) indicates whether an operation results

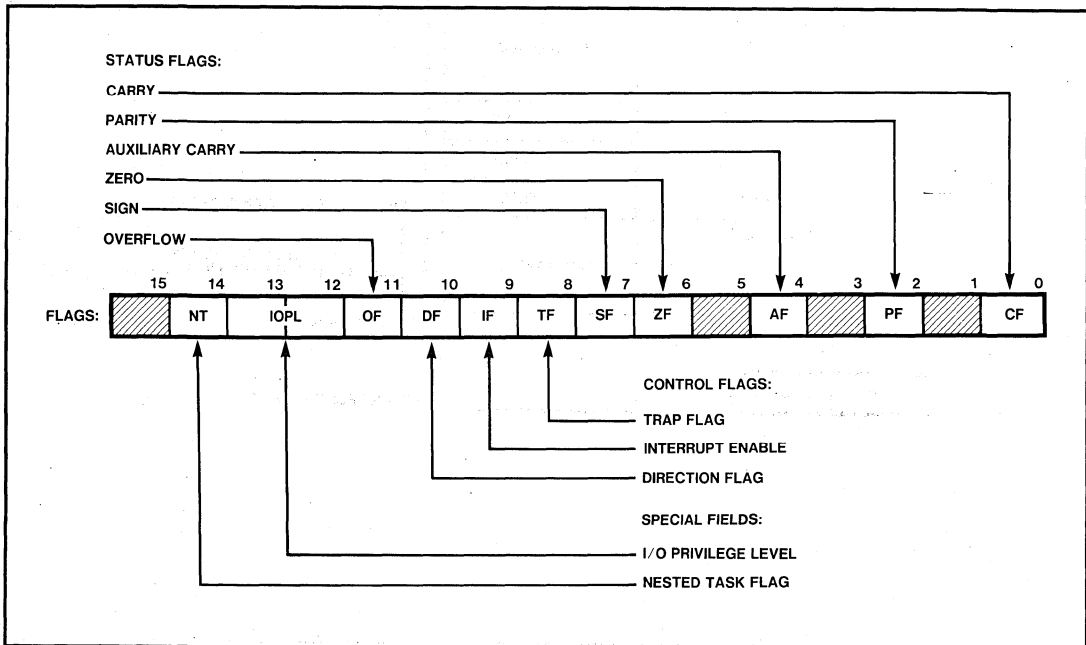


Figure 2-10. Flags Register

in a carry into the high order bit of the result but not a carry out of the high-order bit, or vice versa; the parity flag (PF) indicates whether the modulo 2 sum of the low-order eight bits of the operation is even (PF=0) or odd (PF=1) parity. The auxiliary carry flag (AF) represents a carry out of or borrow into the least significant 4-bit digit when performing binary coded decimal (BCD) arithmetic.

The FLAGS register also contains three control flags that are used, under program control, to direct certain processor operations. The interrupt-enable flag (IF), if set, enables external interrupts; otherwise, interrupts are disabled. The trap flag (TF), if set, puts the processor into a single-step mode for debugging purposes where the target program is automatically interrupted to a user supplied debug routine after the execution of each target program instruction. The direction flag (DF) controls the forward or backward direction of string operations: 0 = forward or auto increment the address register(s) (SI, DI or SI and DI), 1 = backward or auto-decrement the address register(s) (SI, DI or SI and DI).

In general, the interrupt enable flag may be set or reset with special instructions (STI = set, CLI = clear) or by placing the flags on the stack, modifying the stack, and returning the flag image from the stack to the flag register. If operating in Protected Mode, the ability to alter the IF bit is subject to protection checks to prevent non-privileged programs from effecting the interrupt state of the CPU. This applies to both instruction and stack options for modifying the IF bit.

The TF flag may only be modified by copying the flag register to the stack, setting the TF bit in the stack image, and returning the modified stack image to the flag register. The trap interrupt occurs on completion of the

next instruction. Entry to the single step routine saves the flag register on the stack with the TF bit set, and resets the TF bit in the register. After completion of the single step routine, the TF bit is automatically set on return to the program being single stepped to interrupt the program again after completion of the next instruction. Use of TF is not inhibited by the protection mechanism in Protected Mode.

The DF flag, like the IF flag, is controlled by instructions (CLD = clear, STD = set) or flag register modification through the stack. Typically, routines that use string instructions will save the flags on the stack, modify DF as necessary via the instructions provided, and restore DF to its original state by restoring the Flag register from the stack before returning. Access or control of the DF flag is not inhibited by the protection mechanism in Protected Mode.

The Special Fields bits are only relevant in Protected Mode. Real Address Mode programs should treat these bits as don't-care's, making no assumption about their status. Attempts to modify the IOPL and NT fields are subject to protection checking in Protected Mode. In general, the application's programmer will not be able to and should not attempt to modify these bits. (See section 9.4, "Privileged and Trusted Instructions" for more details.)

2.4 ADDRESSING MODES

The information encoded in an iAPX 286 instruction includes a specification of the operation to be performed, the type of the operands to be manipulated, and the location of these operands. If an operand is located in memory, the instruction must also select, explicitly or implicitly, which of the currently addressable segments contains the operand.

This section covers the operand addressing mechanisms; iAPX 286 operators are discussed in Chapter 3.

The five elements of a general instruction are briefly described below. The exact format of iAPX 286 instructions is specified in Appendix B.

- The opcode is present in all instructions; in fact, it is the only required element. Its principal function is the specification of the operation performed by the instruction.
- A register specifier.
- The addressing mode specifier, when present, is used to specify the addressing mode of an operand for referencing data or performing indirect calls or jumps.
- The displacement, when present, is used to compute the effective address of an operand in memory.
- The immediate operand, when present, directly specifies one operand of the instruction.

Of the four elements, only one, the opcode, is always present. The other elements may or may not be present, depending on the particular operation involved and on the location and type of the operands.

2.4.1 Operands

Generally speaking, an instruction is an operation performed on zero, one, or two operands, which are the data manipulated by the instruction. An operand can be located either in a register (AX, BX, CX, DX, SI, DI, SP, or BP in the case of 16-bit operands; AH, AL, BH, BL, CH, CL, DH, or DL in the case of 8-bit operands; the FLAG register for flag operations in the instruction itself (as an immediate operand)), or in memory or an

I/O port. Immediate operands and operands in registers can be accessed more rapidly than operands in memory since memory operands must be fetched from memory while immediate and register operands are available in the processor.

An iAPX 286 instruction can reference zero, one, or two operands. The three forms are as follows:

- Zero-operand instructions, such as RET, NOP, and HLT. Consult Appendix B.
- One-operand instructions, such as INC or DEC. The location of the single operand can be specified *implicitly*, as in AAM (where the register AX contains the operand), or *explicitly*, as in INC (where the operand can be in any register or memory location). Explicitly specified operands are accessed via one of the addressing modes described in section 2.4.2.
- Two operand instructions such as MOV, ADD, XOR, etc., generally overwrite one of the two participating operands with the result. A distinction can thus be made between the source operand (the one left unaffected by the operation) and the destination operand (the one overwritten by the result). Like one-operand instructions, two-operand instructions can specify the location of operands either explicitly or implicitly. If an instruction contains two explicitly specified operands, only one of them—either the source or the destination—can be in a register or memory location. The other operand must be in a register or be an immediate source operand. Special cases of two-operand instructions are the string instructions and stack manipulation. Both operands of some string instructions are in memory and are explicitly specified. Push and pop

stack operations allow transfer between memory operands and the memory based stack.

Thus, the two-operand instructions of the iAPX 286 permit operations of the following sort:

- Register-to-register
- Register-to-memory
- Memory-to-register
- Immediate-to-register
- Immediate-to-memory
- Memory-to-memory

Instructions can specify the location of their operands by means of eight addressing modes, which are described in sections 2.4.2 and 2.4.3.

2.4.2 Register and Immediate Modes

Two addressing modes are used to reference operands contained in registers and instructions:

- Register Operand Mode. The operand is located in one of the 16-bit registers (AX, BX, CX, DX, SI, DI, SP, or BP) or in one of the 8-bit general registers (AH, BH, CH, DH, AL, BL, CL, or DL)

Special instructions are also included for referencing the CS, DS, ES, SS, and Flag registers as operands also.

- Immediate Operand Mode. The operand is part of the instruction itself (the immediate operand element).

2.4.3 Memory Addressing Modes

Six modes are used to access operands in memory. Memory operands are accessed by means of a pointer consisting of a segment

selector (see section 2.3.2) and an offset, which specifies the operand's displacement in bytes from the beginning of the segment in which it resides. Both the segment selector component and the offset component are 16-bit values. (See section 2.1 for a discussion of segmentation.) Only some instructions use a full 32-bit address.

Most memory references do not require the instruction to specify a full 32-bit pointer address. Operands that are located within one of the currently addressable segments, as determined by the four segment registers (see section 2.3.2, "Segment Registers"), can be referenced very efficiently simply by means of the 16-bit offset. This form of address is called by short address. The choice of segment (CS, DS, ES, or SS) is either implicit within the instruction itself or explicitly specified by means of a segment override prefix (see below).

See figure 2-11 for a diagram of the addressing process.

2.4.3.1 SEGMENT SELECTION

All instructions that address operands in memory must specify the segment and the offset. For speed and compact instruction encoding, segment selectors are usually stored in the high speed segment registers. An instruction need specify only the desired segment register and an offset in order to address a memory operand.

Most instructions need not explicitly specify which segment register is used. The correct segment register is automatically chosen according to the rules of table 2-1 and table 2-2. These rules follow the way programs are written (see figure 2-12) as independent modules that require areas for code and data, a stack, and access to external data areas.

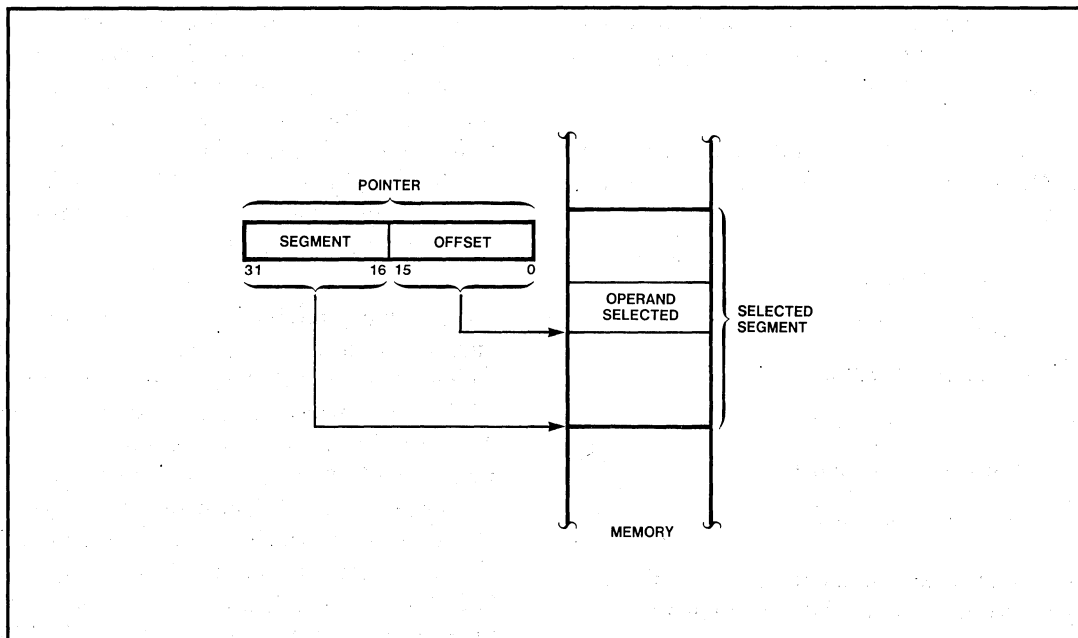


Figure 2-11. Two-Component Address

Table 2-2. Segment Register Selection Rules

| Memory Reference Needed | Segment Register Used | Implicit Segment Selection Rule |
|-------------------------|-----------------------|---|
| Instructions | Code (CS) | Automatic with instruction prefetch. |
| Stack | Stack (SS) | All stack pushes and pops. Any memory reference which uses BP as a base register. |
| Local Data | Data (DS) | All data references except when relative to stack or string destination. |
| External (Global) Data | Extra (ES) | Alternate data segment and destination of string operation. |

There is a close connection between the type of memory reference and the segment in which that operand resides (see the next section for a discussion of how memory addressing mode calculations are performed). As a rule, a memory reference implies the current data segment (i.e., the implicit segment selector is in DS) unless the BP register is involved in the address specifica-

tion, in which case the current stack segment is implied (i.e, SS contains the selector).

The iAPX 286 instruction set defines special instruction prefix elements (see Appendix B). One of these is SEG, the segment-override prefix. Segment-override prefixes allow an explicit segment selection. Only in two special cases—namely, the use of DI to reference

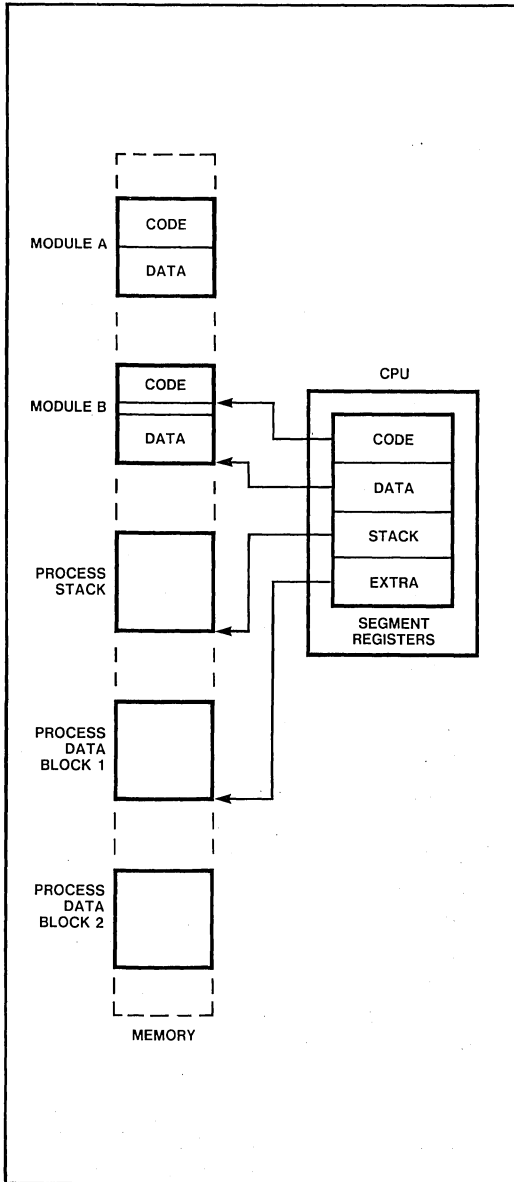


Figure 2-12. Use of Memory Segmentation

destination strings in the ES segment, and the use of SP to reference stack locations in the SS segment—is there an implied segment selection which cannot be overridden. The format of segment override prefixes is shown in Appendix B.

2.4.3.2 OFFSET COMPUTATION

The offset within the desired segment is calculated in accordance with the desired addressing mode. The offset is calculated by taking the sum of up to three components:

- the displacement element in the instruction
- the base (contents of BX or BP—a base register)
- the index (contents of SI or DI—an index register)

Each of the three components of an offset may be either a positive or negative value. Offsets are calculated modulo 2^{16} .

The six memory addressing modes are generated using various combinations of these three components. The six modes are used for accessing different types of data stored in memory:

| addressing mode | offset calculation |
|---------------------------------|----------------------|
| direct address | displacement alone |
| register indirect | base or index alone |
| based | base + displacement |
| indexed | index + displacement |
| based indexed | base + index |
| based indexed with displacement | base + index + disp |

In all six modes, the operand is located at the specified offset within the selected segment. All displacements, except direct address mode, are optionally 8- or 16-bit values. 8-bit displacements are automatically sign-extended to 16 bits. The six addressing modes are described and demonstrated in the following section on memory addressing modes.

2.4.3.3 MEMORY MODE

Two modes are used for simple scalar operands located in memory:

- **Direct Address Mode.** The offset of the operand is contained in the instruction as the displacement element. The offset is a 16-bit quantity.
- **Register Indirect Mode.** The offset of the operand is in one of the registers SI, DI, or BX. (BP is excluded; if BP is used as a stack frame base, it requires an index or displacement component to reference either parameters passed on the stack or temporary variables allocated on the stack. The instruction level bit encoding for the BP only address mode is used to specify Direct Address mode. See Chapter 12 for more details.)

The following four modes are used for accessing complex data structures in memory (see figure 2-13):

- **Based Mode.** The operand is located within the selected segment at an offset computed as the sum of the displacement and the contents of a base register (BX or BP). Based mode is often used to access the same field in different copies of a structure (often called a record). The base register points to the base of the structure (hence the term "base" register), and the displacement selects a particular field. Corresponding fields within a collection of structures can be accessed simply by changing the base register. (See figure 2-13, example 1.)
- **Indexed Mode.** The operand is located within the selected segment at an offset computed as the sum of the displacement and the contents of an index register (SI or DI). Indexed mode is often used to access elements in a static array (e.g., an

array whose starting location is fixed at translation time). The displacement locates the beginning of the array, and the value of the index register selects one element. Since all array elements are the same length, simple arithmetic on the index register will select any element. (See figure 2-13, example 2.)

- **Based Indexed Mode.** The operand is located within the selected segment at an offset computed as the sum of the base register's contents and an index register's contents. Based Indexed mode is often used to access elements of a dynamic array (i.e., an array whose base address can change during execution). The base register points to the base of the array, and the value of the index register is used to select one element. (See figure 2-13, example 3.)
- **Based Indexed Mode with Displacement.** The operand is located with the selected segment at an offset computed as the sum of a base register's contents, an index register's contents, and the displacement. This mode is often used to access elements of an array within a structure. For example, the structure could be an activation record (i.e., a region of the stack containing the register contents, parameters, and variables associated with one instance of a procedure); and one variable could be an array. The base register points to the start of the activation record, the displacement expresses the distance from the start of the record to the beginning of the array variable, and the index register selects a particular element of the array. (See figure 2-13, example 4.)

Table 2-3 gives a summary of all memory operand addressing options.

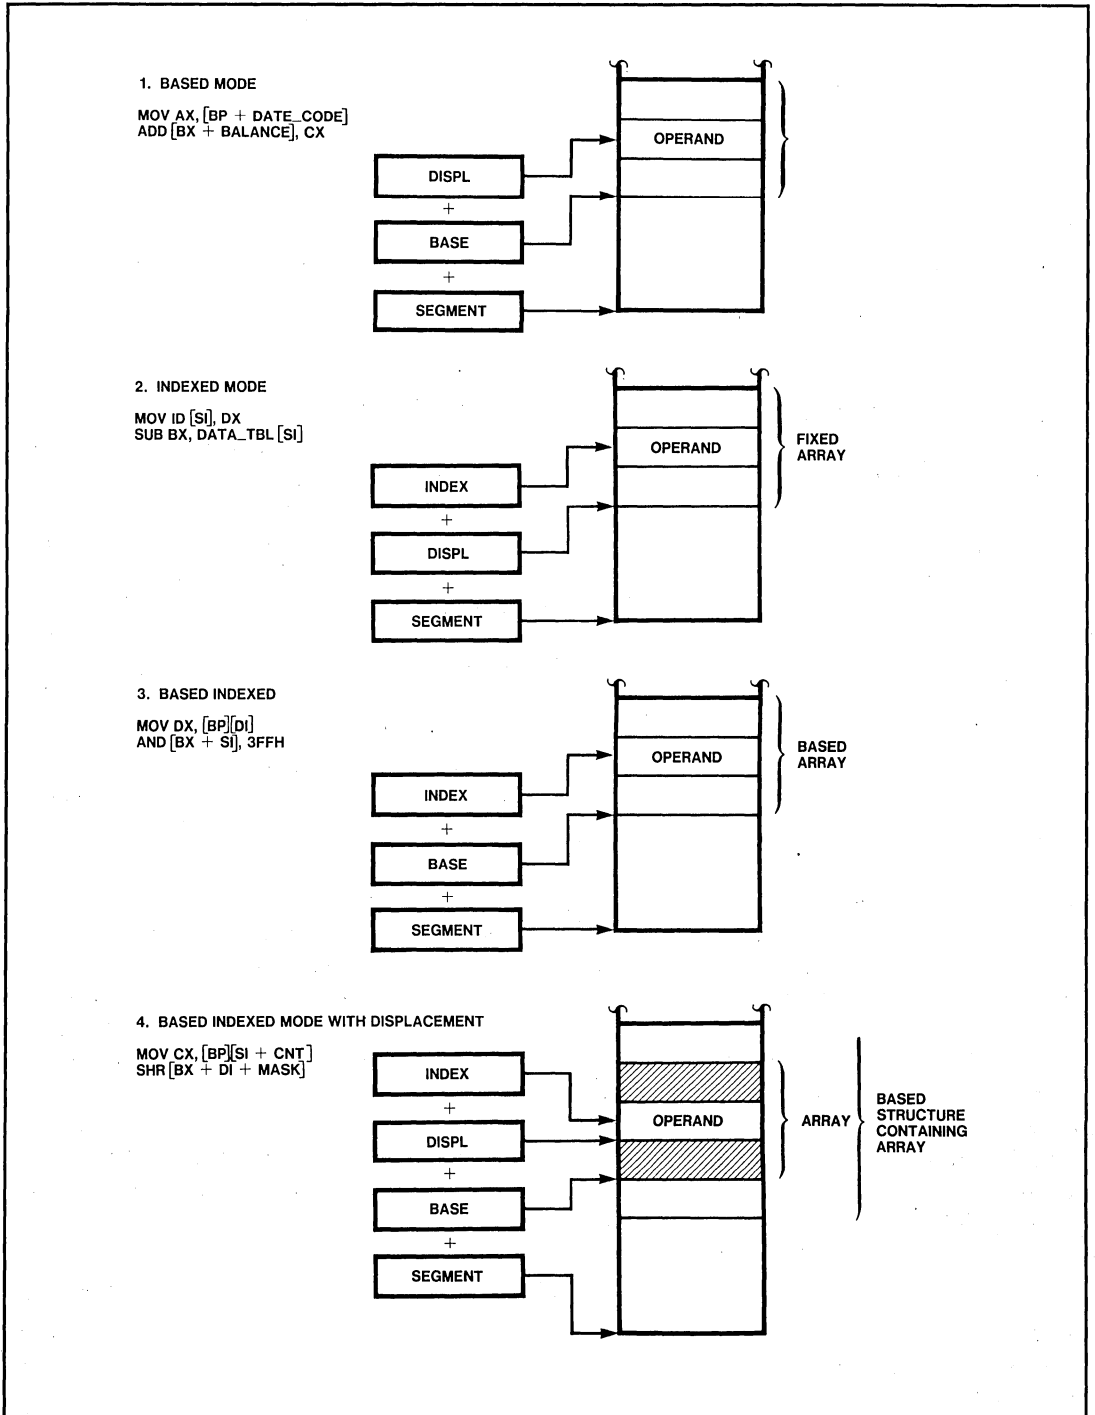


Figure 2-13. Complex Addressing Modes

Table 2-3. Memory Operand Addressing Modes

| Addressing Mode | Offset Calculation |
|------------------------------|---|
| Direct | 16-bit Displacement in the instruction |
| Register Indirect | BX, SI, DI |
| Based | (BX or BP) + Displacement* |
| Indexed | (SI or DI) + Displacement* |
| Based Indexed | (BX or BP) + (SI or DI) |
| Based Indexed + Displacement | (BX or BP) + (SI or DI) + Displacement* |

* The displacement can be a 0, 8 or 16-bit value.

2.5 INPUT/OUTPUT

The iAPX 286 allows input/output to be performed in either of two ways: by means of a separate I/O address space (using specific I/O instructions) or by means of memory-mapped I/O (using general-purpose operand manipulation instructions).

2.5.1 I/O Address Space

The iAPX 286 provides a separate I/O address space, distinct from physical memory, to address the input/output ports that are used for external devices. The I/O address space consists of 2^{16} (64K) individually addressable 8-bit ports. Any two consecutive 8-bit ports can be treated as a 16-bit port. Thus, the I/O address space can accommodate up to 64K 8-bit ports or up to 32K 16-bit ports. I/O port addresses 00F8H to 00FFH are reserved by Intel.

The iAPX 286 can transfer either 8 or 16 bits at a time to a device located in the I/O space. Like words in memory, 16-bit ports should be aligned at even-numbered addresses so that the 16 bits will be transferred in a single access. An 8-bit port may be located at either an even or odd address. The internal registers

in a given peripheral controller device should be assigned addresses as shown below.

The I/O instructions IN and OUT (described in section 3.11.3) are provided to move data between I/O ports and the AX (16-bit I/O) or AL (8-bit I/O) general registers. The block I/O instructions INS and OUTS (described in section 4.1) move blocks of data between I/O ports and memory space (as shown below). In Protected Mode, an operating system may prevent a program from executing these I/O instructions. Otherwise, the function of the I/O instructions and the structure of the I/O space are identical for both modes of operation.

```
INS  es:byte ptr [di], DX
OUTS DX, byte ptr [si]
```

IN and OUT instructions address I/O with either a direct address to one of up to 256 port addresses, or indirectly via the DX register to one of up to 64K port addresses. Block I/O uses the DX register to specify the I/O address and either SI or DI to designate the source or destination memory address. For each transfer, SI or DI are either incremented or decremented as specified by the direction bit in the flag word while DX is constant to select the I/O device.

| Port Register | Port Addresses | Example |
|--|---------------------|-----------|
| 16-bit | even word addresses | OUT FE,AX |
| 8-bit; device on lower half of 16-bit data bus | even byte addresses | IN AL,FE |
| 8-bit; device on upper half of 16-bit data bus | odd byte addresses | OUT FF,AL |

2.5.2 Memory-Mapped I/O

I/O devices also may be placed in the iAPX 286 memory address space. So long as the devices respond like memory components, they are indistinguishable to the processor.

Memory-mapped I/O provides additional programming flexibility. Any instruction that references memory may be used to access an I/O port located in the memory space. For example, the MOV instruction can transfer data between any register and a port; and the AND, OR, and TEST instructions may be used to manipulate bits in the internal registers of a device (see figure 2-14). Memory-mapped I/O performed via the full instruction set maintains the full complement of addressing modes for selecting the desired I/O device.

Memory-mapped I/O, like any other memory reference, is subject to access protection and control when executing in protected mode.

2.6 INTERRUPTS AND EXCEPTIONS

The iAPX 286 architecture supports several mechanisms for interrupting program execu-

tion. Internal interrupts are synchronous events that are the responses of the CPU to certain events detected during the execution of an instruction. External interrupts are asynchronous events typically triggered by external devices needing attention. The iAPX 286 supports both maskable (controlled by the IF flag) and non-maskable interrupts. They cause the processor to temporarily suspend its present program execution in order to service the requesting device. The major distinction between these two kinds of interrupts is their origin: an internal interrupt is always reproducible by re-executing with the program and data that caused the interrupt, whereas an external interrupt is generally independent of the currently executing task.

Interrupts 0-31 are reserved by Intel.

Application programmers will normally not be concerned with servicing external interrupts. More information on external interrupts for system programmers may be found in Chapter 5, section 5.2, "Interrupt Handling for Real Address Mode," and in Chapter 9, "Interrupts, Traps and Faults for Protected Virtual Address Mode."

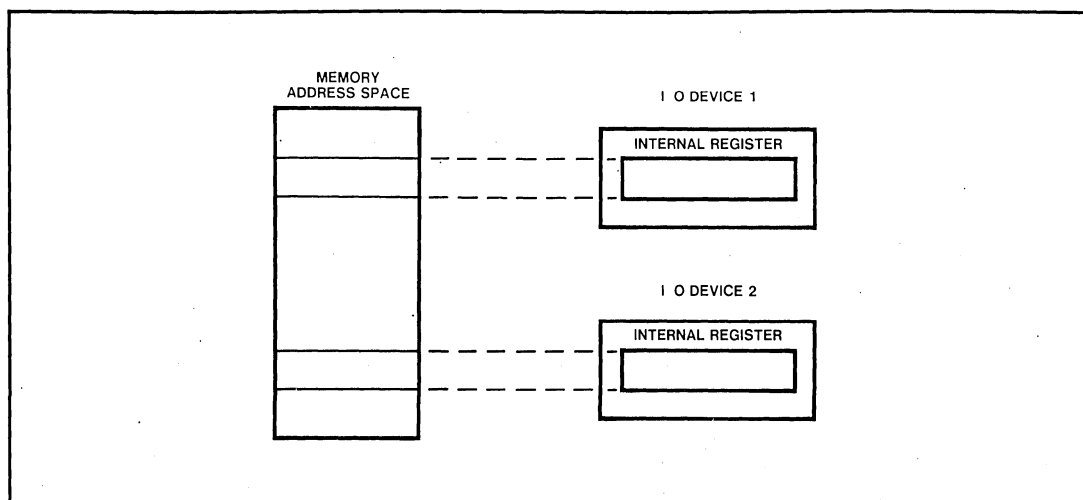


Figure 2-14. Memory-Mapped I/O

Table 2-4. iAPX 286 Interrupt Vector Assignments (Real Address Mode)

| Function | Interrupt Number | Related Instructions | Return Address Before Instruction Causing Exception? |
|---|------------------|--|--|
| Divide error exception | 0 | DIV, IDIV | Yes |
| Single step interrupt | 1 | All | |
| NMI interrupt | 2 | All | |
| Breakpoint interrupt | 3 | INT | |
| INTO detected overflow exception | 4 | INTO | No |
| BOUND range exceeded exception | 5 | BOUND | Yes |
| Invalid opcode exception | 6 | Any undefined opcode | Yes |
| Processor extension not available exception | 7 | ESC or WAIT | Yes |
| Interrupt table limit too small exception | 8 | INT vector is not within table limit | Yes |
| Processor extension segment overrun interrupt | 9 | ESC with memory operand extending beyond offset FFFF(H) | No |
| Reserved | 10-12 | | |
| Segment overrun exception | 13 | Word memory reference with offset = FFFF(H) or an attempt to execute past the end of a segment | Yes |
| Reserved | 14, 15 | | |
| Processor extension error interrupt | 16 | ESC or WAIT | |
| Reserved | 17-31 | | |
| User defined | 32-255 | | |

In Real Address Mode, the application programmer is affected by two kinds of internal interrupts. (Internal interrupts are the

result of executing an instruction which causes the interrupt.) One type of interrupt is called an exception because the interrupt only occurs

if a particular fault condition exists. The other type of interrupt generates the interrupt every time the instruction is executed.

The exceptions are: *divide error, INTO detected overflow, bounds check, segment overrun, invalid operation code, and processor extension error* (see table 2-4). A divide error exception results when the instructions DIV or IDIV are executed with a zero denominator; otherwise, the quotient will be too large for the destination operand (see section 3.3.4 for a discussion of DIV and IDIV). An overflow exception results when the INTO instruction is executed and the OF flag is set (after an arithmetic operation that set the overflow (OF) flag). (See section 3.6.3, "Software Generated Interrupts," for a discussion of INTO.) A bounds check exception results when the BOUND instruction is executed and the array index it checks falls outside the bounds of the array. (See section 4.2 for a discussion of the BOUND instruction.) The segment overrun exception occurs when a word memory reference is attempted which extends beyond the end of a segment. An invalid operation code exception occurs if an attempt is made to execute an undefined instruction operation code. A processor

extension error is generated when a processor extension detects an illegal operation. Refer to Chapter 5 for a more complete description of these exception conditions.

The instruction INT generates an internal interrupt whenever it is executed. The effects of this interrupt (and the effects of all interrupts) is determined by the interrupt handler routines provided by the application program or as part of the system software (provided by system programmers). See Chapter 5 for more on this topic. The INT instruction itself is discussed in section 3.6.3.

In Protected Mode, many more fault conditions are detected and result in internal interrupts. Protected Mode interrupts and faults are discussed in Chapter 10.

2.7 HIERARCHY OF INSTRUCTION SETS

For descriptive purposes, the iAPX 286 instruction set is partitioned into three distinct subsets: the Basic Instruction Set, the Extended Instruction Set, and the System Control Instruction Set. The "hierarchy" of instruction sets defined by this partitioning helps to clarify the relationships between the various processors in the iAPX 86 family (see figure 2-15).

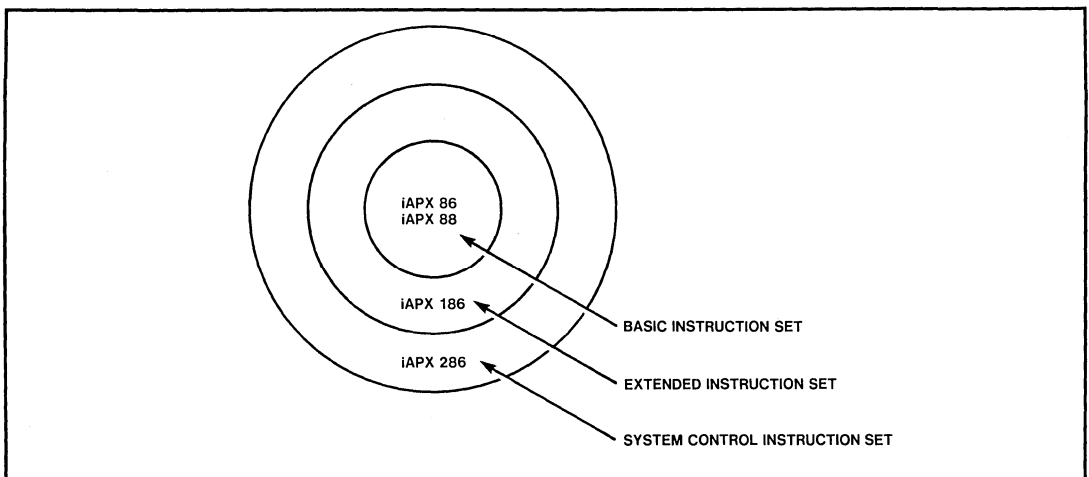


Figure 2-15. Hierarchy of Instructions

The Basic Instruction Set, presented in Chapter 3, comprises the common subset of instructions found on all processors of the iAPX 86 family. Included are instructions for logical and arithmetic operations, data movement, input/output, string manipulation, and transfer of control.

The Extended Instruction Set, presented in Chapter 4, consists of those instructions found

only on the iAPX 186 and iAPX 286 processors. Included are instructions for block structured procedure entry and exit, parameter validation, and block I/O transfers.

The System Control Instruction Set, presented in Chapter 10, consists of those instructions unique to the iAPX 286. These instructions control the memory management and protection mechanisms of the iAPX 286.

CHAPTER 3

BASIC INSTRUCTION SET

The base architecture of the iAPX 286 is identical to the complete instruction set of the iAPX 86, 88, and 186 processors. The iAPX 286 instruction set includes new forms of some instructions. These new forms reduce program size and improve the performance and ease of implementation of source code.

This chapter describes the instructions which programmers can use to write application software for the iAPX 286. The following chapters describe the operation of more complicated I/O and system control instructions.

All instructions described in this chapter are available for both Real Address Mode and Protected Virtual Address Mode operation. The instruction descriptions note any differences that exist between the operation of an instruction in these two modes.

This chapter also describes the operation of each application program-relative instruction and includes an example of using the instruction. The Instruction Dictionary in Appendix B contains formal descriptions of all instructions. Any opcode pattern that is not described in the Instruction Dictionary is undefined and results in an opcode violation trap (interrupt 6).

3.1 DATA MOVEMENT INSTRUCTIONS

These instructions provide convenient methods for moving bytes or words of data between memory and the registers of the base architecture.

3.1.1 General-Purpose Data Movement Instructions

MOV (Move) transfers a byte or a word from the source operand to the destination operand.

The *MOV* instruction is useful for transferring data to a register from memory, to memory from a register, between registers, immediate-to-register, or immediate-to-memory. Memory-to-memory or segment register-to-segment register moves are not allowed.

Example: `MOV DS,AX`

Replaces the contents of register DS with the contents of register AX.

XCHG (Exchange) swaps the contents of two operands. This instruction takes the place of three *MOV* instructions. It does not require a temporary memory location to save the contents of one operand while you load the other.

The *XCHG* instruction can swap two byte operands or two word operands, but not a byte for a word or a word for a byte. The operands for the *XCHG* instruction may be two register operands, or a register operand with a memory operand. When used with a memory operand, *XCHG* automatically activates the LOCK signal.

Example: `XCHG BX,WORDOPRND`

Swaps the contents of register BX with the contents of the memory word identified by the label WORDOPRND after asserting bus lock.

3.1.2 Stack Manipulation Instructions

PUSH (Push) decrements the stack pointer (SP) by two and then transfers a word from the source operand to the top of stack indicated by SP. See figure 3-1. *PUSH* is

BASIC INSTRUCTION SET

often used to place parameters on the stack before calling a procedure; it is also the basic means of storing temporary variables on the stack. The PUSH instruction operates on memory operands, immediate operands (new with the iAPX 286), and register operands (including segment registers).

Example: PUSH WORDOPRND

Transfers a 16-bit value from the memory word identified by the label WORDOPRND to the memory location which represents the current top of stack (byte transfers are not allowed).

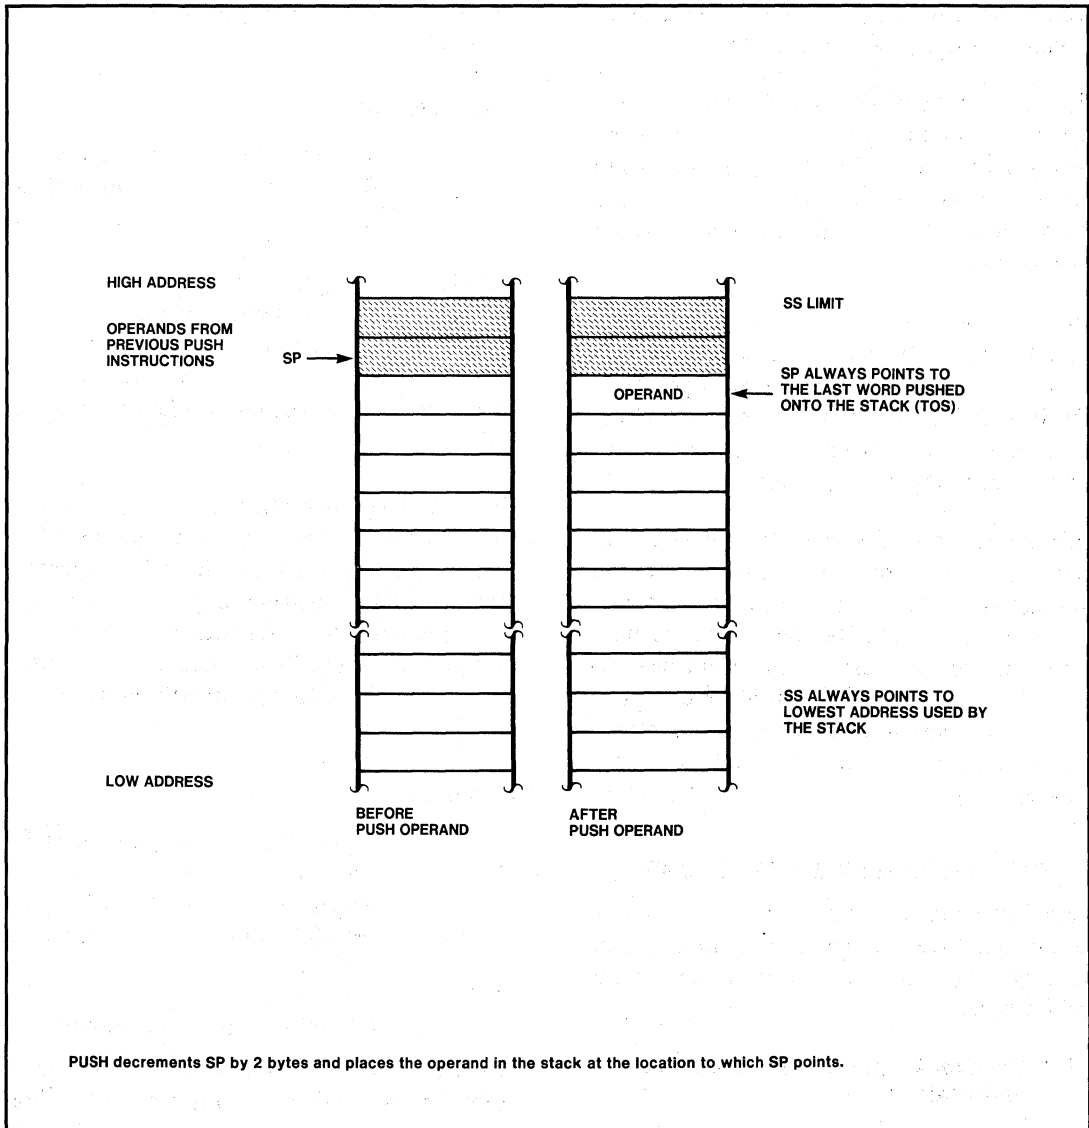


Figure 3-1. PUSH

BASIC INSTRUCTION SET

PUSHA (*Push All Registers*) saves the contents of the eight general registers on the stack. See figure 3-2. This instruction simplifies procedure calls by reducing the number of instructions required to retain the contents of the general registers for use in a procedure. *PUSHA* is complemented by *POPA* (see below).

The processor pushes the general registers on the stack in the following order: AX, CX, DX, BX, the initial value of SP before AX was pushed, BP, SI, and DI.

Example: *PUSHA*

Pushes onto the stack the contents of the eight general registers.

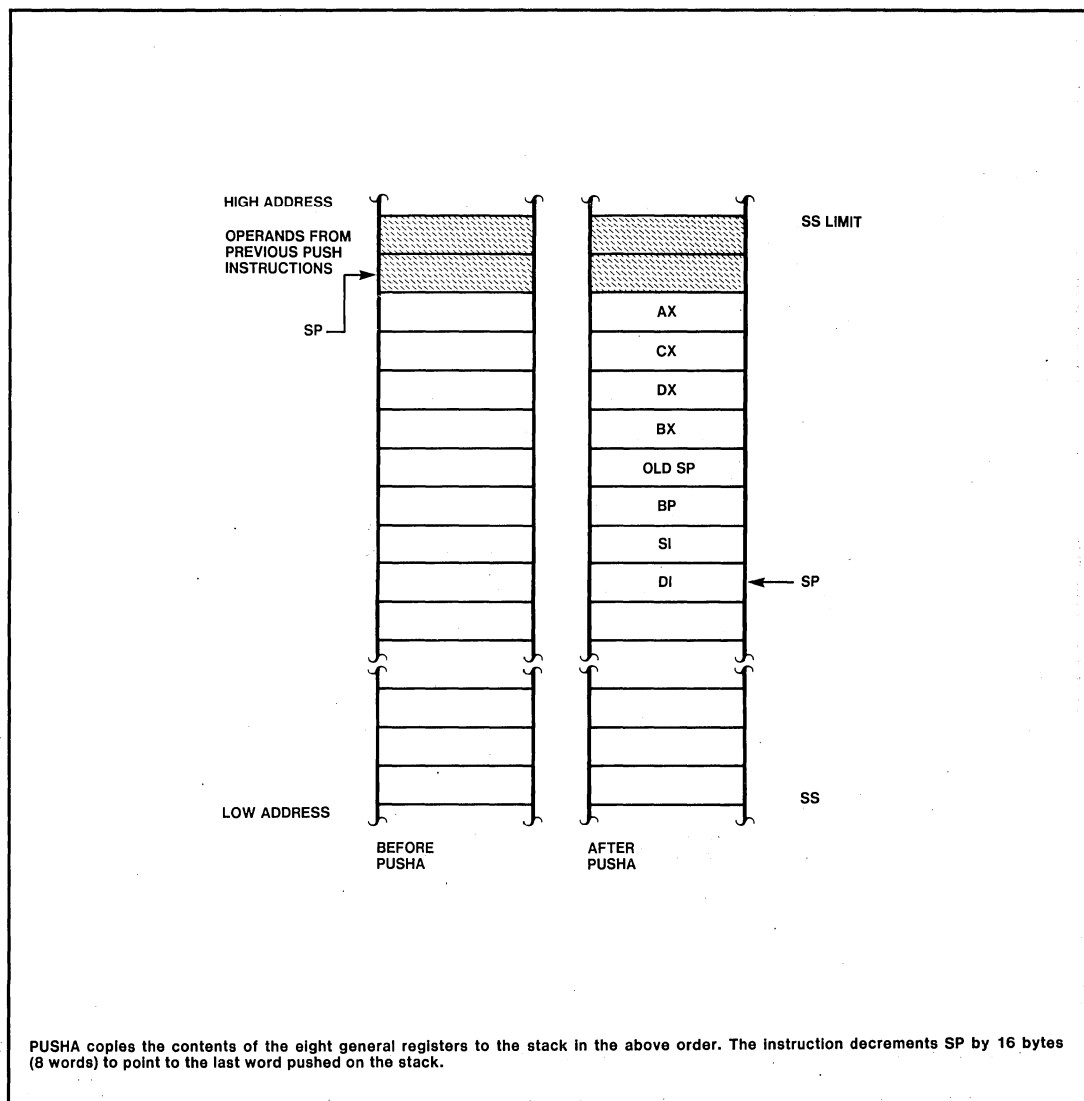


Figure 3-2. *PUSHA*

BASIC INSTRUCTION SET

POP (Pop) transfers the word at the current top of stack (indicated by SP) to the destination operand, and then increments SP by two to point to the new top of stack. See figure 3-3. POP moves information from the stack to either a register or memory. The only restriction on POP is that it cannot place a value in register CS.

Example: POP BX

Replaces the contents of register BX with the contents of the memory location at the top of stack.

POPA (Pop All Registers) restores the registers saved on the stack by PUSH A,

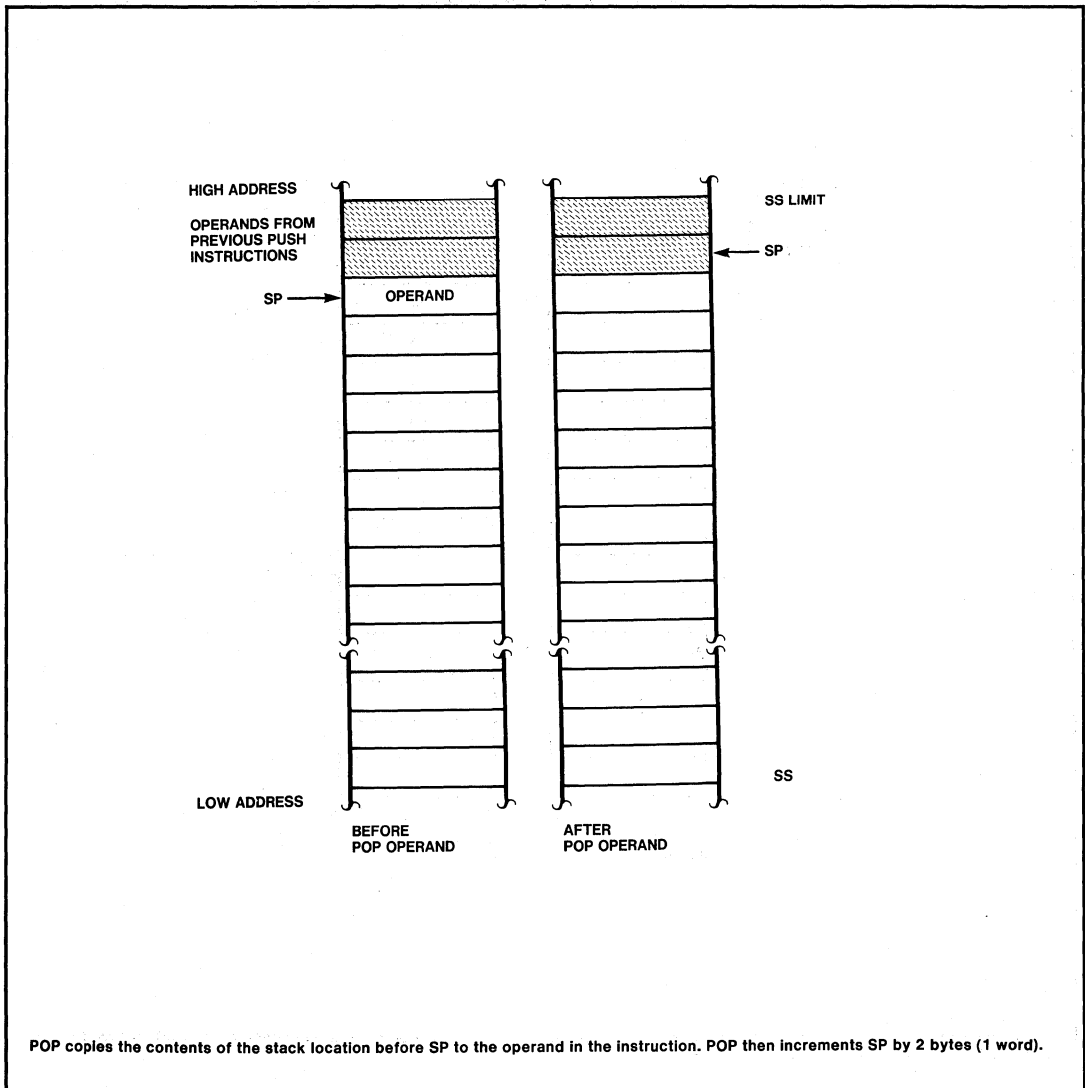


Figure 3-3. POP

except that it ignores the value of SP. See figure 3-4.

Example: POPA

Pops from the stack the saved contents of the general registers, and restores the registers (except SP) to their original state.

3.2 FLAG OPERATION WITH THE BASIC INSTRUCTION SET

3.2.1 Status Flags

The status flags of the FLAGS register reflect conditions that result from a previous

instruction or instructions. The arithmetic instructions use OF, SF, ZF, AF, PF, and CF.

The SCAS (Scan String), CMPS (Compare String), and LOOP instructions use ZF to signal that their operations are complete. The base architecture includes instructions to set, clear, and complement CF before execution of an arithmetic instruction. See figure 3-5 and tables 3-1 and 3-2.

3.2.2 Control Flags

The control flags of the FLAGS register determine processor operations for string instructions, maskable interrupts, and debugging.

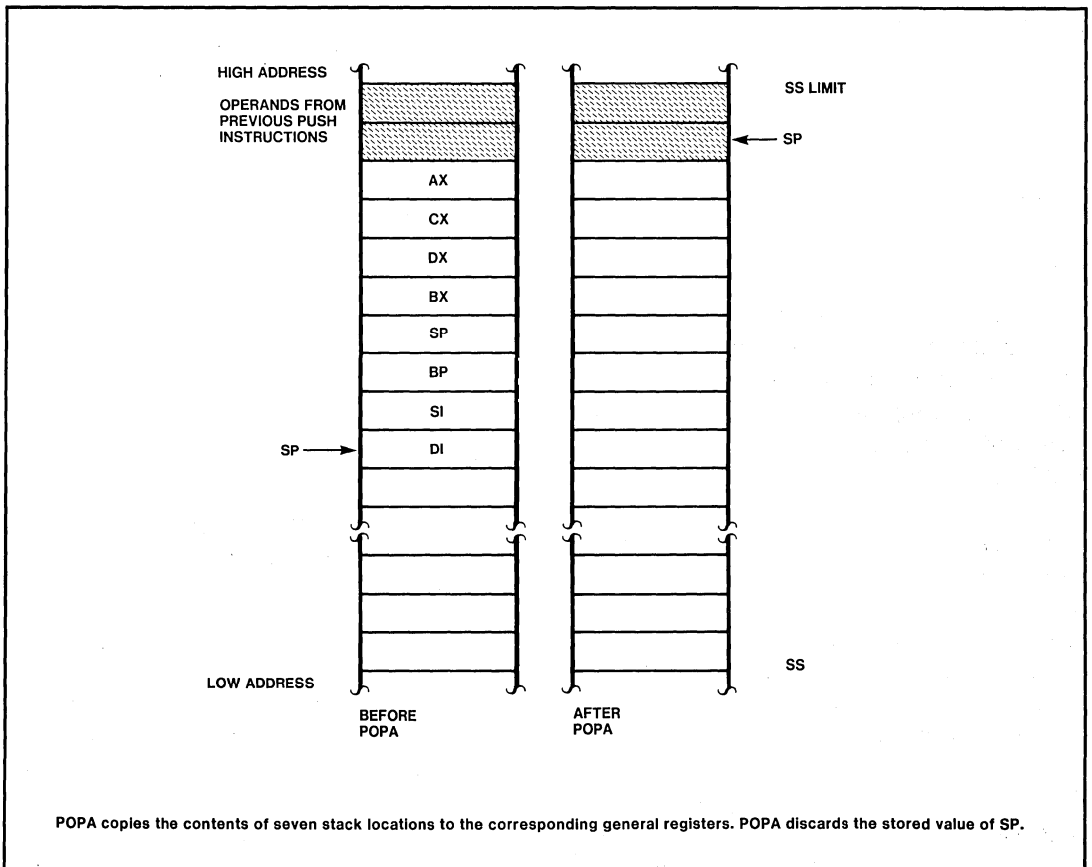


Figure 3-4. POPA

BASIC INSTRUCTION SET

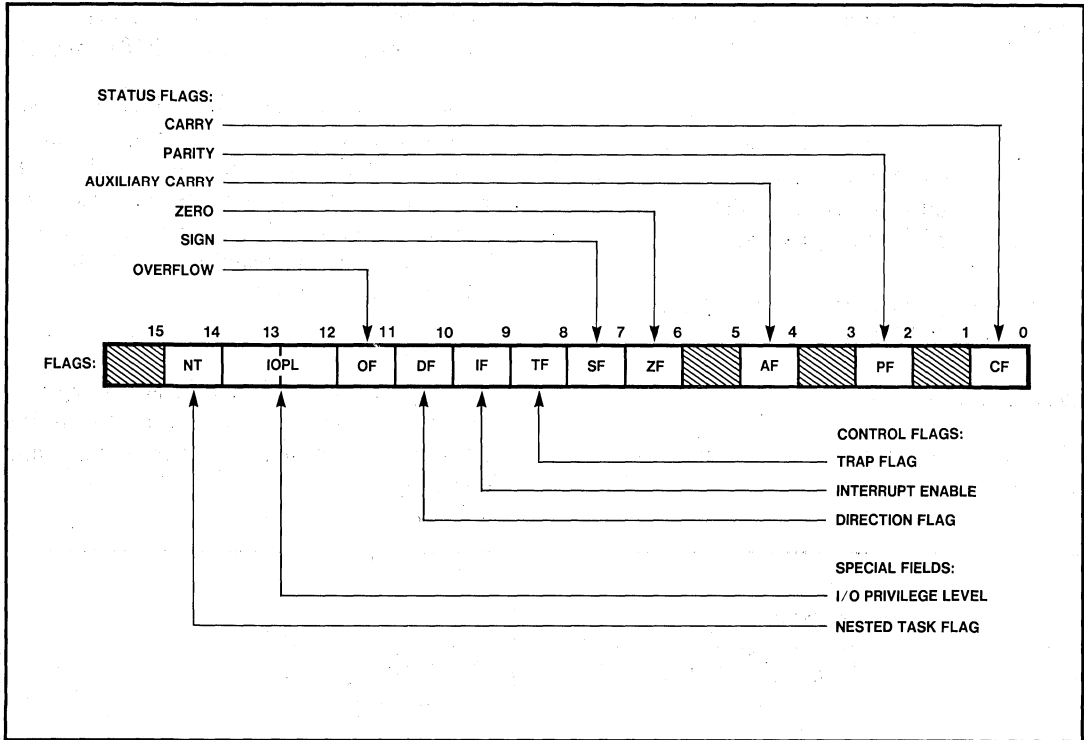


Figure 3-5. Flag Word Contents

Setting *DF* (*direction flag*) causes string instructions to auto-decrement; that is, to process strings from high addresses to low addresses, or from “right-to-left.” Clearing *DF* causes string instructions to auto-increment, or to process strings from “left-to-right.”

Setting *IF* (*interrupt flag*) allows the CPU to recognize external (maskable) interrupt requests. Clearing *IF* disables these interrupts. *IF* has no effect on either internally generated interrupts, nonmaskable external interrupts, or processor extension segment overrun interrupts.

Setting *TF* (*trap flag*) puts the processor into single-step mode for debugging. In this mode, the CPU automatically generates an internal interrupt after each instruction, allowing a

program to be inspected as it executes each instruction, instruction by instruction.

3.3 ARITHMETIC INSTRUCTIONS

The arithmetic instructions of the iAPX 86-family processors simplify the manipulation of numerical data. Multiplication and division instructions ease the handling of signed and unsigned binary integers as well as unpacked decimal integers.

An arithmetic operation may consist of two register operands, a general register source operand with a memory destination operand, a memory source operand with a register destination operand, or an immediate field with either a register or memory destination operand, but not two memory operands. Arithmetic instructions can operate on either byte or word operands.

Table 3-1. Status Flags' Functions

| Bit Position | Name | Function |
|--------------|------|---|
| 0 | CF | Carry Flag—Set on high-order bit carry or borrow; cleared otherwise |
| 2 | PF | Parity Flag—Set if low-order eight bits of result contain an even number of 1 bits; cleared otherwise |
| 4 | AF | Set on carry from or borrow to the low order four bits of AL; cleared otherwise |
| 6 | ZF | Zero Flag—Set if result is zero; cleared otherwise |
| 7 | SF | Sign Flag—Set equal to high-order bit of result (0 if positive, 1 if negative) |
| 11 | OF | Overflow Flag—Set if result is too-large a positive number or too-small a negative number (excluding sign-bit) to fit in destination operand; cleared otherwise |

Table 3-2. Control Flags' Functions

| Bit Position | Name | Function |
|--------------|------|---|
| 8 | TF | Trap (Single Step) Flag—Once set, a single step interrupt occurs after the next instruction executes. TF is cleared by the single step interrupt. |
| 9 | IF | Interrupt-enable Flag—When set, maskable interrupts will cause the CPU to transfer control to an interrupt vector-specified location. |
| 10 | DF | Direction Flag—Causes string instructions to auto decrement the appropriate index registers when set. Clearing DF causes auto increment. |

3.3.1 Addition Instructions

ADD (Add Integers) replaces the destination operand with the sum of the source and destination operands. *ADD* affects OF, SF, AF, PF, CF, and ZF.

Example: `ADD BL, BYTEOPRND`

Adds the contents of the memory byte labeled `BYTEOPRND` to the contents of `BL`, and replaces `BL` with the resulting sum.

ADC (Add Integers with Carry) sums the operands, adds one if CF is set, and replaces the destination operand with the result. *ADC* can be used to add numbers longer than 16 bits. *ADC* affects OF, SF, AF, PF, CF, and ZF.

Example: `ADC BX, CX`

Replaces the contents of the destination operand `BX` with the sum of `BX`, `CS`, and 1 (if CF is set). If CF is cleared, *ADC* performs the same operation as the *ADD* instruction.

INC (Increment) adds one to the destination operand. The processor treats the operand as an unsigned binary number. *INC* updates AF, OF, PF, SF, and ZF, but it does not affect CF. Use *ADD* with an immediate value of 1 if an increment that updates carry (CF) is needed.

Example: `INC BL`

Adds 1 to the contents of `BL`.

3.3.2 Subtraction Instructions

SUB (Subtract Integers) subtracts the source operand from the destination operand and replaces the destination operand with the result. If a borrow is required, carry flag is

set. The operands may be signed or unsigned bytes or words. SUB affects OF, SF, ZF, AF, PF, and CF.

Example: SUB WORDOPRND, AX

Replaces the contents of the destination operand WORDOPRND with the result obtained by subtracting the contents of AX from the contents of the memory word labeled WORDOPRND.

SBB (Subtract Integers with Borrow) subtracts the source operand from the destination operand, subtracts 1 if CF is set, and returns the result to the destination operand. The operands may be signed or unsigned bytes or words. SBB may be used to subtract numbers longer than 16 bits. This instruction affects OF, SF, ZF, AF, PF, and CF. The carry flag is set if a borrow is required.

Example: SBB BL, 32

Subtracts 32 from the contents of BL and then decrements the result of this subtraction by one if CF is set. If CF is cleared, SBB performs the same operation as SUB.

DEC (Decrement) subtracts 1 from the destination operand. DEC updates AF, OF, PF, SF, and ZF, but it does not affect CF. Use SUB with an immediate value of 1 to perform a decrement that affects carry.

Example: DEC BX

Subtracts 1 from the contents of BX and places the result back in BX.

3.3.3 Multiplication Instructions

MUL (Unsigned Integer Multiply) performs an unsigned multiplication of the source

operand and the accumulator. If the source is a byte, the processor multiplies it by the contents of AL and returns the double-length result to AH and AL.

If the source operand is a word, the processor multiplies it by the contents of AX and returns the double-length result to DX and AX. MUL sets CF and OF to indicate that the upper half of the result is nonzero; otherwise, they are cleared. This instruction leaves SF, ZF, AF, and PF undefined.

Example: MUL BX

Replaces the contents of DX and AX with the product of BX and AX. The low-order 16 bits of the result replace the contents of AX; the high-order word goes to DX. The processor sets CF and OF if the unsigned result is greater than 16 bits.

IMUL (Signed Integer Multiply) performs a signed multiplication operation. IMUL uses AX and DX in the same way as the MUL instruction, except when used in the immediate form.

The immediate form of IMUL allows the specification of a destination register other than the combination of DX and AX. In this case, the result cannot exceed 16 bits without causing an overflow. If the immediate operand is a byte, the processor automatically extends it to 16 bits before performing the multiplication.

The immediate form of IMUL may also be used with unsigned operands because the low 16 bits of a signed or unsigned multiplication of two 16-bit values will always be the same.

IMUL clears CF and OF to indicate that the upper half of the result is the sign of the lower

half. This instruction leaves SF, ZF, AF, and PF undefined.

Example: IMUL BL

Replaces the contents of AX with the product of BL and AL. The processor sets CF and OF if the result is more than 8 bits long.

Example: IMUL BX, SI, 5

Replaces the contents of BX with the product of the contents of SI and an immediate value of 5. The processor sets CF and OF if the signed result is longer than 16 bits.

3.3.4 Division Instructions

DIV (Unsigned Integer Divide) performs an unsigned division of the accumulator by the source operand. If the source operand is a byte, it is divided into the double-length dividend assumed to be in registers AL and AH (AH = most significant byte; AL = least significant byte). The single-length quotient is returned in AL, and the single-length remainder is returned in AH.

If the source operand is a word, it is divided into the double-length dividend in registers AX and DX. The single-length quotient is returned in AX, and the single-length remainder is returned in DX. Non-integral quotients are truncated to integers toward 0. The remainder is always less than the quotient.

For unsigned byte division, the largest quotient is 255. For unsigned word division, the largest quotient is 65,535. *DIV* leaves OF, SF, ZF, AF, PF, and CF undefined. Interrupt (INT 0) occurs if the divisor is zero or if the quotient is too large for AL or AX.

Example: DIV BX

Replaces the contents of AX with the unsigned quotient of the doubleword value contained in DX and AX, divided by BX. The unsigned modulo replaces the contents of DX.

Example: DIV BL

Replaces the contents of AL with the unsigned quotient of the word value in AX, divided by BL. The unsigned modulo replaces the contents of AH.

IDIV (Signed Integer Divide) performs a signed division of the accumulator by the source operand. *IDIV* uses the same registers as the *DIV* instruction.

For signed byte division, the maximum positive quotient is +127 and the minimum negative quotient is -128. For signed word division, the maximum positive quotient is +32,767 and the minimum negative quotient is -32,768. Non-integral results are truncated towards 0. The remainder will always have the same sign as the dividend and will be less than the divisor in magnitude. *IDIV* leaves OF, SF, ZF, AF, PF, and CF undefined. A division by zero causes an interrupt (INT 0) to occur if the divisor is 0 or if the quotient is too large for AL or AX.

Example: IDIV WORDOPRND

Replaces the contents of AX with the signed quotient of the doubleword value contained in DX and AX, divided by the value contained in the memory word labeled WORDOPRND. The signed modulo replaces the contents of DX.

3.4 LOGICAL INSTRUCTIONS

The group of logical instructions includes the Boolean operation instructions, rotate and shift instructions, type conversion instructions, and the no-operation (NOP) instruction.

3.4.1 Boolean Operation Instructions

Except for the NOT and NEG instructions, the Boolean operation instructions can use two register operands, a general purpose register operand with a memory operand, an immediate operand with a general purpose register operand, or a memory operand. The NOT and NEG instructions are unary operations that use a single operand in a register or memory.

AND (And) performs the logical “and” of the operands (byte or word) and returns the result to the destination operand. AND clears OF and DF, leaves AF undefined, and updates SF, ZF, and PF.

Example: AND WORDOPRND, BX

Replaces the contents of WORDOPRND with the logical “and” of the contents of the memory word labeled WORDOPRND and the contents of BX.

NOT (Not) inverts the bits in the specified operand to form a one’s complement of the operand. NOT has no effect on the flags.

Example: NOT BYTEOPRND

Replaces the original contents of BYTEOPRND with the one’s complement of the contents of the memory word labeled BYTEOPRND.

OR (Or) performs the logical “inclusive or” of the two operands and returns the result to the destination operand. OR clears OF and DF, leaves AF undefined, and updates SF, ZF, and PF.

Example: OR AL,5

Replaces the original contents of AL with the logical “inclusive or” of the contents of AL and the immediate value 5.

XOR (Exclusive OR) performs the logical “exclusive or” of the two operands and returns the result to the destination operand. XOR clears OF and DF, leaves AF undefined, and updates SF, ZF, and PF.

Example: XOR DX, WORDOPRND

Replaces the original contents of DX with the logical “exclusive or” or the contents of DX and the contents of the memory word labeled WORDOPRND.

NEG (Negate) forms a two’s complement of a signed byte or word operand. The effect of NEG is to reverse the sign of the operand from positive to negative or from negative to positive. NEG updates OF, SF, ZF, AF, PF, and CF.

Example: NEG AX

Replaces the original contents of AX with the two’s complement of the contents of AX.

3.4.2 Shift and Rotate Instructions

The shift and rotate instructions reposition the bits within the specified operand. The shift instructions provide a convenient way to accomplish division or multiplication by binary power. The rotate instructions are useful for bit testing.

3.4.2.1 SHIFT INSTRUCTIONS

The bits in bytes and words may be shifted arithmetically or logically. Depending on the value of a specified count, up to 31 shifts may be performed.

A shift instruction can specify the count in one of three ways. One form of shift instruction implicitly specifies the count as a single shift. The second form specifies the count as an immediate value. The third form specifies the count as the value contained in CL. This last form allows the shift count to be a variable that the program supplies during execution. Only the low order 5 bits of CL are used.

Shift instructions affect the flags as follows. AF is always undefined following a shift operation. PF, SF, and ZF are updated normally as in the logical instructions.

CF always contains the value of the last bit shifted out of the destination operand. In a single-bit shift, OF is set if the value of the high-order (sign) bit was changed by the operation. Otherwise, OF is cleared. Following a multibit shift, however, the content of OF is always undefined.

SAL (Shift Arithmetic Left) shifts the destination byte or word operand left by one or by the number of bits specified in the count

operand (an immediate value or the value contained in CL). The processor shifts zeros in from the right side of the operand as bits exit from the left side. See figure 3-6.

Example: SAL BL,2

Shifts the contents of BL left by 2 bits and replaces the two low-order bits with zeros.

Example: SAL BL,1

Shifts the contents of BL left by 1 bit and replaces the low-order bit with a zero. Because the processor does not have to decode the immediate count operand to obtain the shift count, this form of the instruction takes 2 clock cycles rather than the 6 clock cycles (5 cycles + 1 cycle for each bit shifted) required by the previous example.

SHL (Shift Logical Left) is physically the same instruction as SAL (see SAL above).

SHR (Shift Logical Right) shifts the destination byte or word operand right by one or by the number of bits specified in the count operand (an immediate value or the value contained in CL). The processor shifts zeros in from the left side of the operand as bits exit from the right side. See figure 3-7.

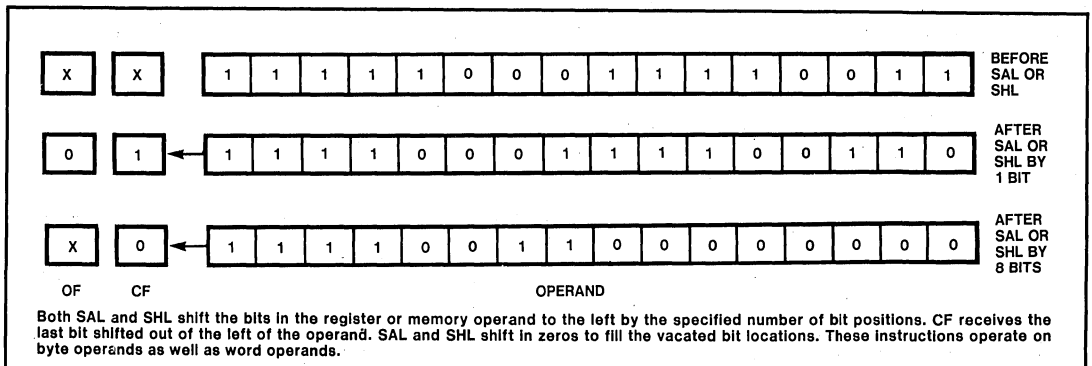


Figure 3-6. SAL and SHL

BASIC INSTRUCTION SET

Example: SHR BYTEOPRND, CL

Shifts the contents of the memory byte labeled BYTEOPRND right by the number of bits specified in CL, and pads the left side of BYTEOPRND with an equal number of zeros.

preserves the sign of the operand by shifting in zeros on the left side if the value is positive or by shifting by ones if the value is negative. See figure 3-8.

Example: SAR WORDPRND,1

SAR (Shift Arithmetic Right) shifts the destination byte or word operand to the right by one or by the number of bits specified in the count operand (an immediate value or the value contained in CL). The processor

Shifts the contents of the memory byte labeled WORDPRND right by one, and replaces the high-order sign bit with a value equal to the original sign of WORDPRND.

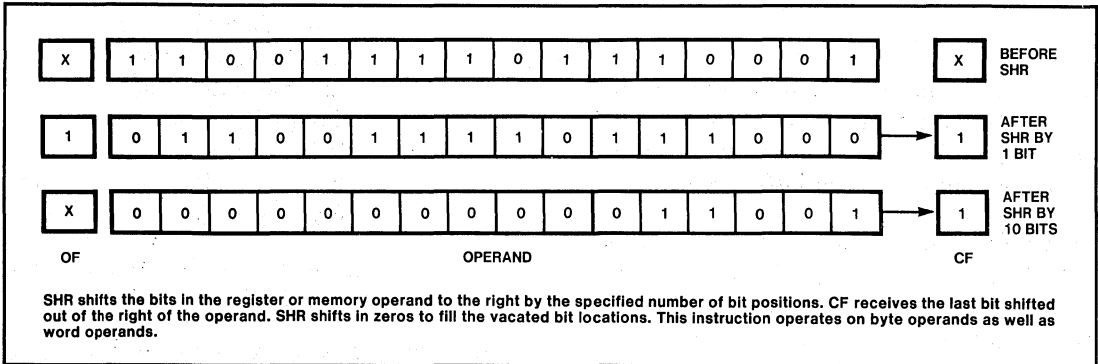


Figure 3-7. SHR

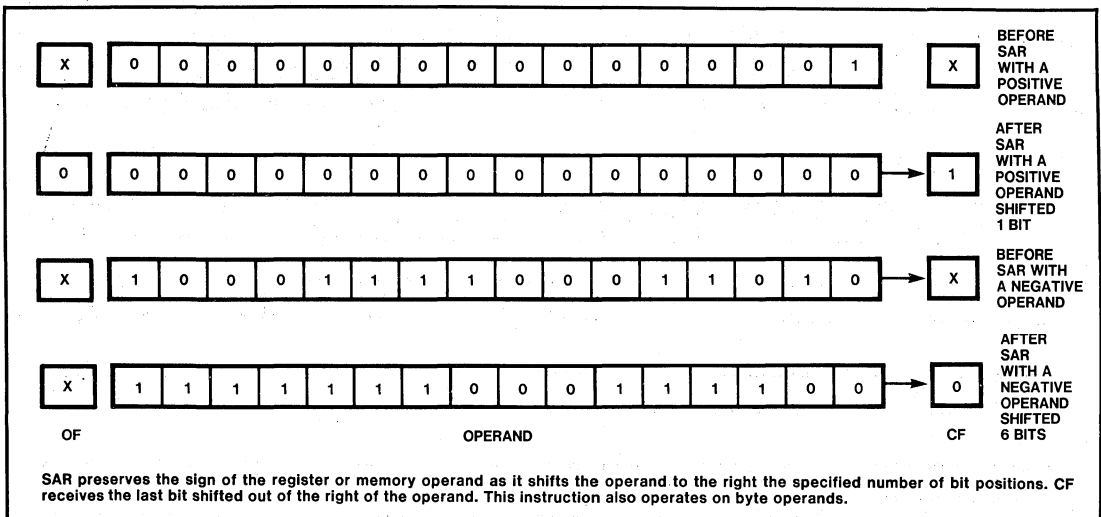


Figure 3-8. SAR

3.4.2.2 ROTATE INSTRUCTIONS

Rotate instructions allow bits in bytes and words to be rotated. Bits rotated out of an operand are not lost as in a shift, but are “circled” back into the other “end” of the operand.

Rotates affect only the carry and overflow flags. CF may act as an extension of the operand in two of the rotate instructions, allowing a bit to be isolated and then tested by a conditional jump instruction (JC or JNC). CF always contains the value of the last bit rotated out, even if the instruction does not use this bit as an extension of the rotated operand.

In single-bit rotates, OF is set if the operation changes the high-order (sign) bit of the destination operand. If the sign bit retains its

original value, OF is cleared. On multibit rotates, the value of OF is always undefined.

ROL (Rotate Left) rotates the byte or word destination operand left by one or by the number of bits specified in the count operand (an immediate value or the value contained in CL). For each rotation specified, the high-order bit that exists from the left of the operand returns at the right to become the new low-order bit of the operand. See figure 3-9.

Example: ROL AL, 8

Rotates the contents of AL left by 8 bits. This rotate instruction returns AL to its original state but isolates the low-order bit in CF for testing by a JC or JNC instruction.

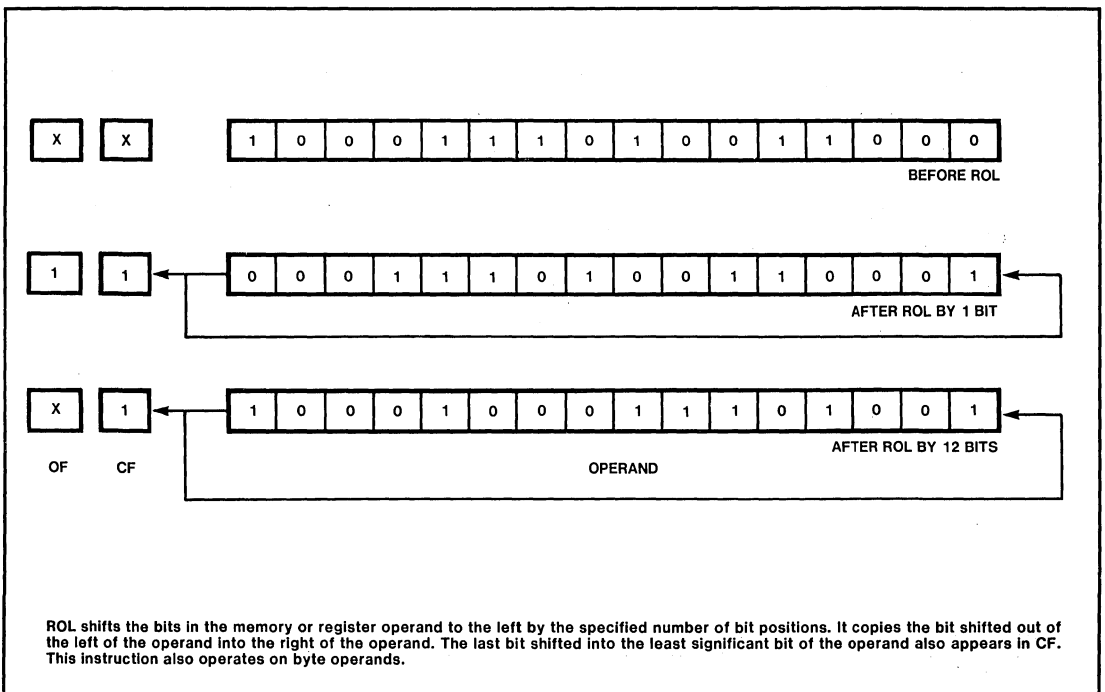


Figure 3-9. ROL

BASIC INSTRUCTION SET

ROR (Rotate Right) rotates the byte or word destination operand right by one or by the number of bits specified in the count operand (an immediate value or the value contained in CL). For each rotation specified, the low-order bit that exits from the right of the operand returns at the left to become the new high-order bit of the operand. See figure 3-10.

Example: ROR WORDOPRND, CL

Rotates the contents of the memory word labeled WORDOPRND by the number of bits specified by the value contained in CL. CF reflects the value of the last bit rotated from the right to the left side of the operand.

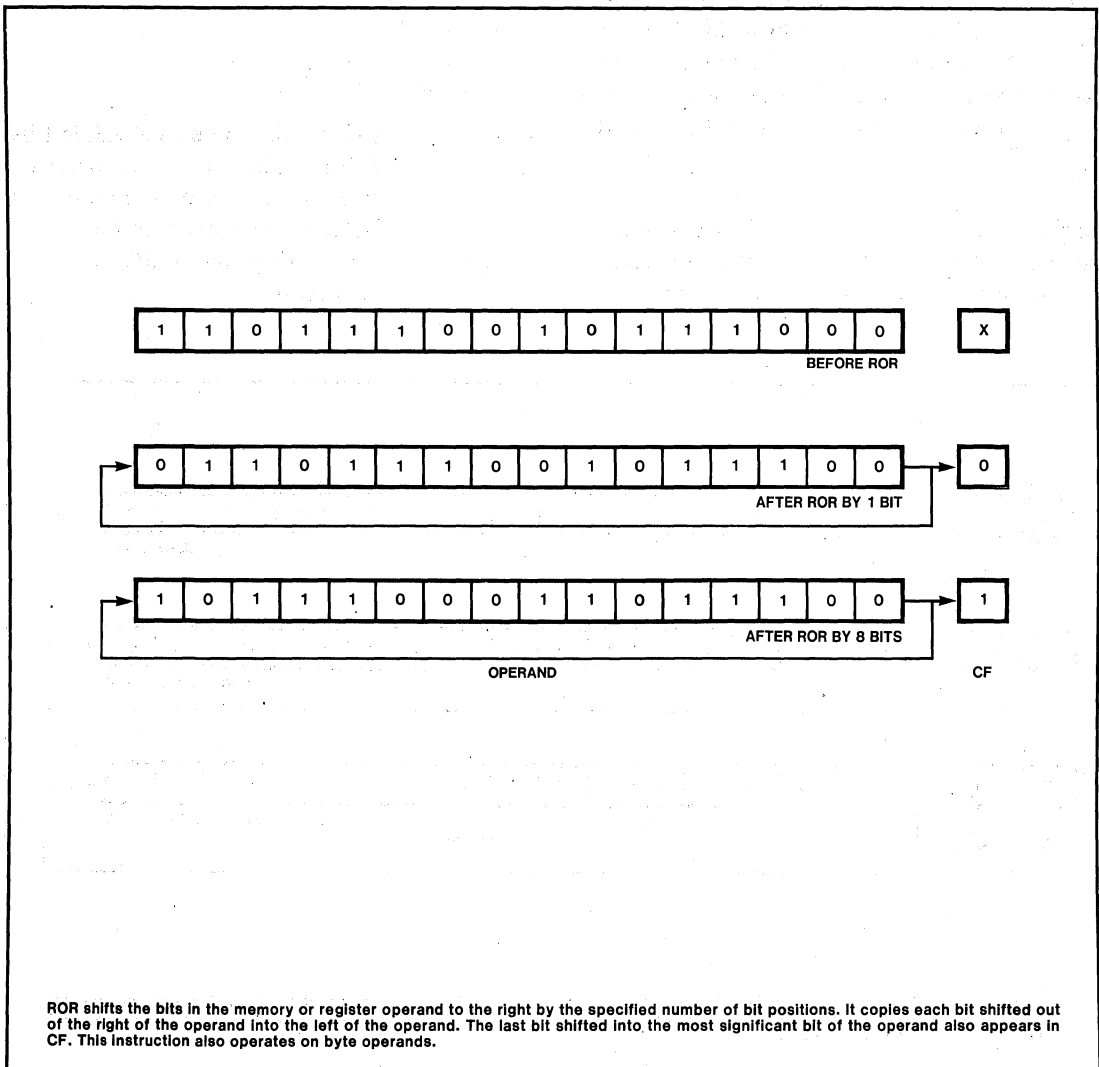


Figure 3-10. ROR

BASIC INSTRUCTION SET

RCL (Rotate Through Carry Left) rotates bits in the byte or word destination operand left by one or by the number of bits specified in the count operand (an immediate value or the value contained in CL).

This instruction differs from ROL in that it treats CF as a high-order 1-bit extension of the destination operand. Each high-order bit that exits from the left side of the operand moves to CF before it returns to the operand

as the low-order bit on the next rotation cycle. See figure 3-11.

Example: RCL BX,1

Rotates the contents of BX left by one bit. The high-order bit of the operand moves to CF, the remaining 15 bits move left one position, and the original value of CF becomes the new low-order bit.

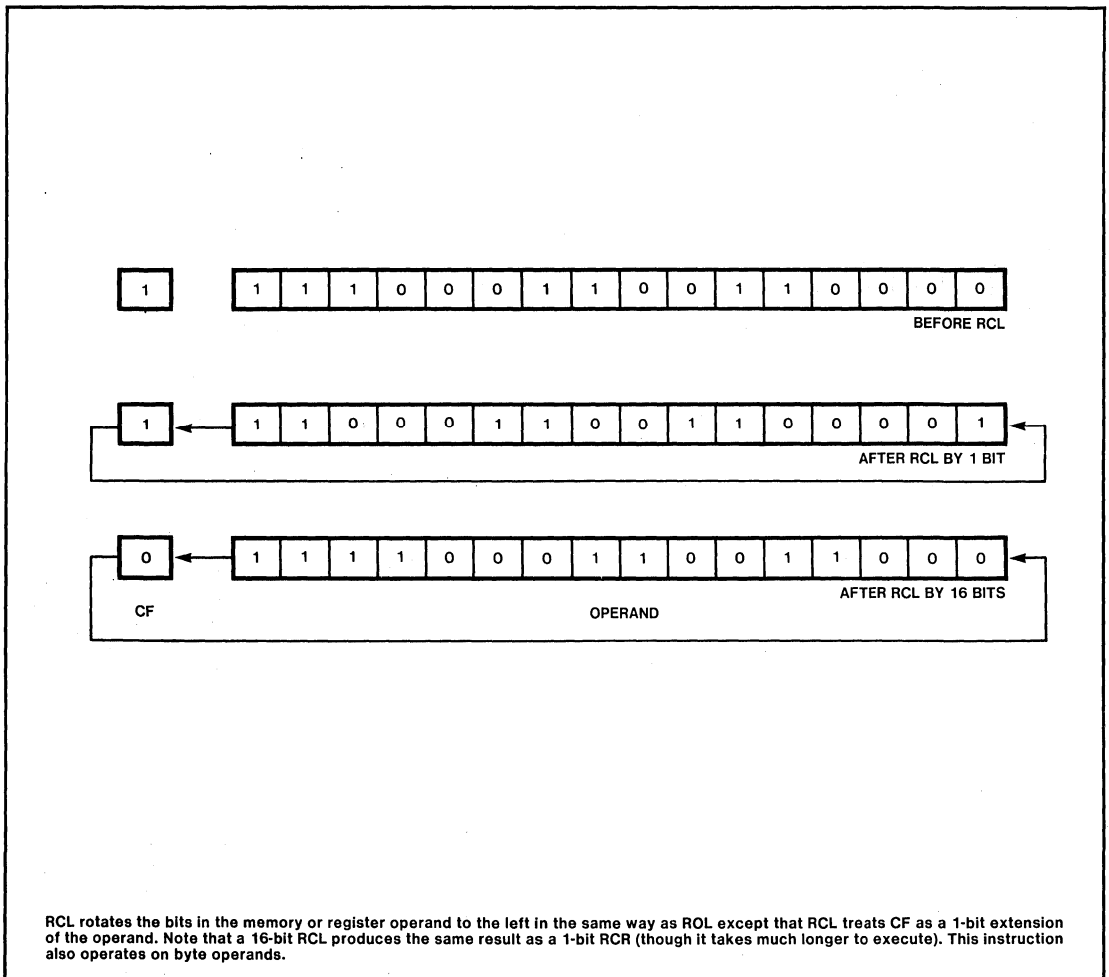


Figure 3-11. RCL

BASIC INSTRUCTION SET

RCR (Rotate Through Carry Right) rotates bits in the byte or word destination operand right by one or by the number of bits specified in the count operand (an immediate value or the value contained in CL).

This instruction differs from ROR in that it treats CF as a low-order 1-bit extension of the destination operand. Each low-order bit that exits from the right side of the operand moves to CF before it returns to the operand as the

high-order bit on the next rotation cycle. See figure 3-12.

Example: `RCR BYTEOPRND,3`

Rotates the contents of the memory byte labeled `BYTEOPRND` to the right by 3 bits. Following the execution of this instruction, CF reflects the original value of bit number 5 of `BYTEOPRND`, and the original value of CF becomes bit 2.

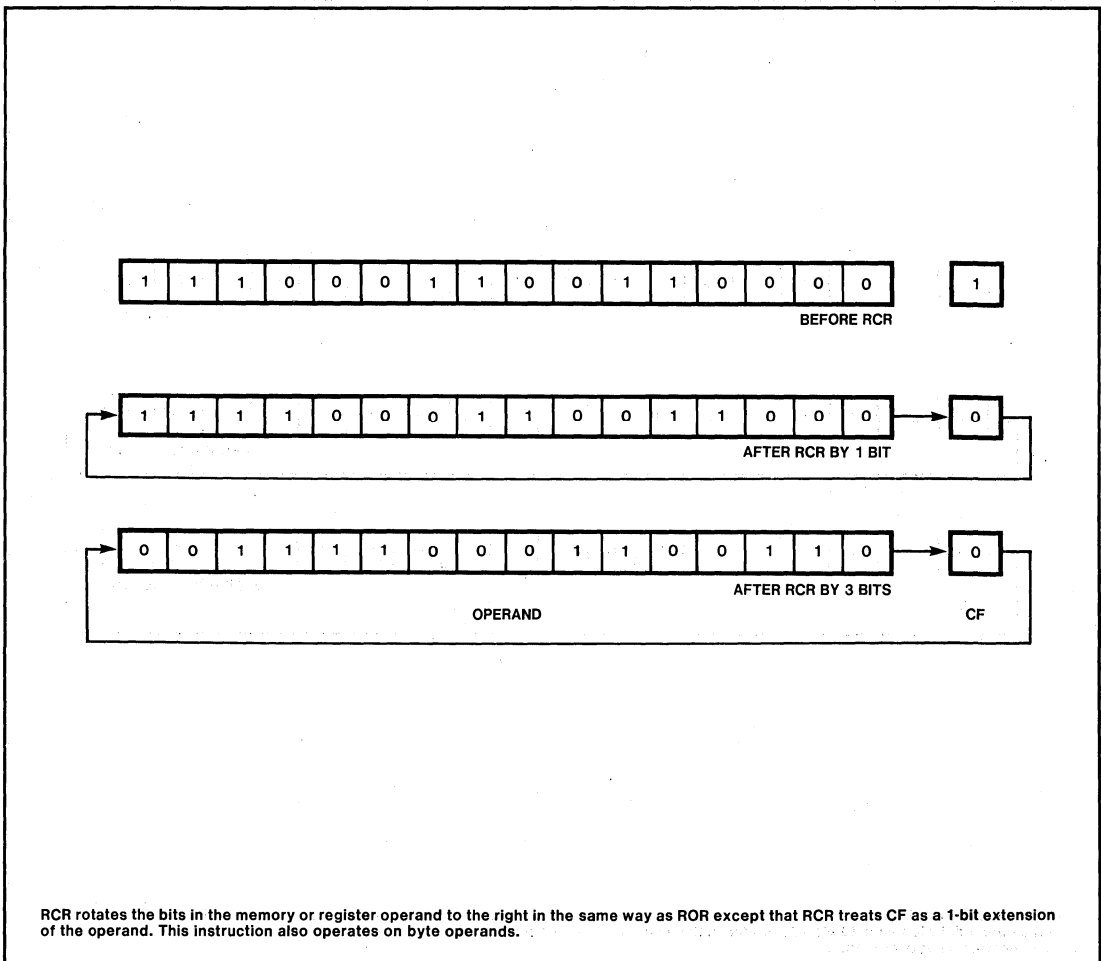


Figure 3-12. RCR

3.4.3 Type Conversion and No-Operation Instructions

The type conversion instructions prepare operands for division. The NOP instruction is a 1-byte filler instruction with no effect on registers or flags.

CWD (Convert Word to Double-Word) extends the sign of the word in register AX throughout register DX. CWD does not affect any flags. CWD can be used to produce a double-length (double-word) dividend from a word before a word division.

CBW (Convert Byte to Word) extends the sign of the byte in register AL throughout AX. CBW does not affect any flags.

Example: CWD

Sign-extends the 16-bit value in AX to a 32-bit value in DX and AX with the high-order 16-bits occupying DX.

NOP (No Operation) occupies a byte of storage but affects nothing but the instruction pointer, IP. The amount of time that a NOP instruction requires for execution varies in proportion to the CPU clocking rate. This variation makes it inadvisable to use NOP instructions in the construction of timing loops because the operation of such a program will not be independent of the system hardware configuration.

Example: NOP

The processor performs no operation for 2 clock cycles.

3.5 TEST AND COMPARE INSTRUCTIONS

The test and compare instructions are similar in that they do not alter their operands. Instead, these instructions perform operations that only set the appropriate flags to indicate the relationship between the two operands.

TEST (Test) performs the logical “and” of the two operands, clears OF and DF, leaves AF undefined, and updates SF, ZF, and PF. The difference between TEST and AND is that TEST does not alter the destination operand.

Example: TEST BL,32

Performs a logical “and” and sets SF, ZF, and PF according to the results of this operation. The contents of BL remain unchanged.

CMP (Compare) subtracts the source operand from the destination operand. It updates OF, SF, ZF, AF, PF, and CF but does not alter the source and destination operands. A subsequent signed or unsigned conditional transfer instruction can test the result using the appropriate flag result.

CMP can compare two register operands, a register operand and a memory operand, a register operand and an immediate operand, or an immediate operand and a memory operand. The operands may be words or bytes, but CMP cannot compare a byte with a word.

Example: CMP BX,32

Subtracts the immediate operand, 32, from the contents of BX and sets OF, SF, ZF, AF, PF, and CF to reflect the result. The contents of BX remain unchanged.

3.6 CONTROL TRANSFER INSTRUCTIONS

The iAPX 286 provides both conditional and unconditional program transfer instructions to direct the flow of execution. Conditional program transfers depend on the results of operations that affect the flag register. Unconditional program transfers are always executed.

3.6.1 Unconditional Transfer Instructions

JMP, CALL, RET, INT and IRET instructions transfer control from one code segment location to another. These locations can be within the same code segment or in different code segments.

3.6.1.1 JUMP INSTRUCTION

JMP (Jump) unconditionally transfers control to the target location. JMP is a one-way transfer of execution; it does not save a return address on the stack.

The JMP instruction always performs the same basic function of transferring control from the current location to a new location. Its implementation varies depending on the following factors:

- Is the address specified directly within the instruction or indirectly through a register or memory?
- Is the target location inside or outside the current code segment selected in CS?

A direct JMP instruction includes the destination address as part of the instruction. An indirect JMP instruction obtains the destination address indirectly through a register or a pointer variable.

Control transfers through a gate or to a task state segment are available only in Protected Mode operation of the iAPX 286. The formats of the instructions that transfer control through a call gate, a task gate, or to a task state segment are the same. The label included in the instruction selects one of these three paths to a new code segment.

Direct JMP within the current code segment.

A direct JMP that transfers control to a target location within the current code segment uses a relative displacement value contained in the instruction. This can be either a 16-bit value

or an 8-bit value sign extended to 16 bits. The processor forms an effective address by adding this relative displacement to the address contained in IP. IP refers to the next instruction when the additions are performed.

Example: JMP NEAR_NEWCODE

Transfers control to the target location labeled NEAR_NEWCODE, which is within the code segment currently selected in CS.

Indirect JMP within the current code segment. Indirect JMP instructions that transfer control to a location within the current code segment specify an absolute address in one of several ways. First, the program can JMP to a location specified by a 16-bit register (any of AX, DX, CX, BX, BP, SI, or DI). The processor moves this 16-bit value into IP and resumes execution.

Example: JMP SI

Transfers control to the target address formed by adding the 16-bit value contained in SI to the base address contained in CS.

The processor can also obtain the destination address within a current segment from a memory word operand specified in the instruction.

Example: JMP PTR_X

Transfers control to the target address formed by adding the 16-bit value contained in the memory word labeled PTR X to the base address contained in CS.

A register can modify the address of the memory word pointer to select a destination address.

Example: `JMP CASE_TABLE [BX]`

`CASE_TABLE` is the first word in an array of word pointers. The value of `BX` determines which pointer the program selects from the array. The `JMP` instruction then transfers control to the location specified by the selected pointer.

Direct JMP outside of the current code segment. Direct `JMP` instructions that specify a target location outside the current code segment contain a full 32-bit pointer. This pointer consists of a selector for the new code segment and an offset within the new segment.

Example: `JMP FAR_NEWCODE_FOO`

Places the selector contained in the instruction into `CS` and the offset into `IP`. The program resumes execution at this location in the new code segment.

Indirect JMP outside of the current code segment. Indirect `JMP` instructions that specify a target location outside the current code segment use a double-word variable to specify the pointer.

Example: `JMP NEWCODE`

`NEWCODE` the first word of two consecutive words in memory which represent the new pointer. `NEWCODE` contains the new offset for `IP` and the word following `NEWCODE` contains the selector for `CS`. The program resumes execution at this location in the new code segment. (Protected mode programs treat

this differently. See Chapters 6 and 7).

Direct JMP outside of the current code segment to a call gate. If the selector included with the instruction refers to a call gate, then the processor ignores the offset in the instruction and takes the pointer of the routine being entered from the call gate.

`JMP` outside of current code segment may only go to the same level.

Example: `JMP CALL_GATE_FOO`

The selector in the instruction refers to the call gate `CALL_GATE_FOO`, and the call gate actually provides the new contents of `CS` and `IP` to specify the address of the next instructions.

Indirect JMP outside the current code segment to a call gate. If the selector specified by the instruction refers to a call gate, the processor ignores the offset in the double-word and takes the address of the routine being entered from the call gate. The `JMP` instruction uses the same format to indirectly specify a task gate or a task state segment.

Example: `JMP CASE_TABLE [BX]`

The instruction refers to the double-word in the array of pointers called `CASE_TABLE`. The specific double-word chosen depends on the value in `BX` when the instruction executes. The selector portion of this double-word selects a call gate, and the processor takes the address of the routine being entered from the call gate.

3.6.1.2 CALL INSTRUCTION

CALL (Call Procedure) activates an out-of-line procedure, saving on the stack the address of the instruction following the *CALL* for later use by a *RET* (Return) instruction. An intrasegment *CALL* places the current value of *IP* on the stack. An intersegment *CALL* places both the value of *IP* and *CS* on the stack. The *RET* instruction in the called procedure uses this address to transfer control back to the calling program.

A long *CALL* instruction that invokes a task-switch stores the outgoing task's task state segment selector in the incoming task state segment's link field and sets the nested task flag in the new task. In this case, the *IRET* instruction takes the place of the *RET* instruction to return control to the nested task.

Examples:

```
CALL NEAR_NEWCODE
CALL SI
CALL PTR_X
CALL CASE_TABLE [BP]
CALL FAR_NEWCODE_FOO
CALL NEWCODE
CALL CALL_GATE_FOO
CALL CASE_TABLE [BX]
```

See the previous treatment of *JMP* for a discussion of the operations of these instructions.

3.6.1.3 RETURN AND RETURN FROM INTERRUPT INSTRUCTION

RET (Return From Procedure) terminates the execution of a procedure and transfers control through a back-link on the stack to the program that originally invoked the procedure.

An intrasegment *RET* restores the value of *IP* that was saved on the stack by the previous

intrasegment *CALL* instruction. An intersegment *RET* restores the values of both *CS* and *IP* which were saved on the stack by the previous intersegment *CALL* instruction.

RET instructions may optionally specify a constant to the stack pointer. This constant specifies the new top of stack to effectively remove any arguments that the calling program pushed on the stack before the execution of the *CALL* instruction.

Example: *RET*

If the previous *CALL* instruction did not transfer control to a new code segment, *RET* restores the value of *IP* pushed by the *CALL* instruction. If the previous *CALL* instruction transferred control to a new segment, *RET* restores the values of both *IP* and *CS* which were pushed on the stack by the *CALL* instruction.

Example: *RET n*

This form of the *RET* instruction performs identically to the above example except that it adds *n* (must be an even value) to the value of *SP* to eliminate *n* bytes of parameter information previously pushed by the calling program.

IRET (Return From Interrupt or Nested Task) returns control to an interrupted routine or, optionally, reverses the action of a *CALL* or *INT* instruction that caused a task switch. See Chapter 8 for further information on task switching.

Example: *IRET*

Returns from an interrupt with or without a task-switch based on the value of the *NT* bit.

3.6.2 Conditional Transfer Instructions

The conditional transfer instructions are jumps that may or may not transfer control, depending on the state of the CPU flags when the instruction executes. Instruction encoding is most efficient when the target for the conditional jumps is in the current code segment and within -128 to $+127$ bytes of the first byte of the next instruction. Alternatively, the opposite sense of the conditional jump can skip around an unconditional jump to the destination.

3.6.2.1 CONDITIONAL JUMP INSTRUCTIONS

Table 3-3 shows the conditional transfer mnemonics and their interpretations. The conditional jumps that are listed as pairs are actually the same instruction. The assembler provides the alternate mnemonics for greater clarity within a program listing.

3.6.2.2 LOOP INSTRUCTIONS

The loop instructions are conditional jumps that use a value placed in *CX* to specify the number of repetitions of a software loop. All loop instructions automatically decrement *CX* and terminate the loop when $CX=0$. Four of the five loop instructions specify a condition of *ZF* that terminates the loop before *CX* decrements to zero.

LOOP (Loop While CX Not Zero) is a conditional transfer that auto-decrements the *CX* register before testing *CX* for the branch condition. If *CX* is non-zero, the program branches to the target label specified in the instruction. The *LOOP* instruction causes the repetition of a code section until the operation of the *LOOP* instruction decrements *CX* to a value of zero. If *LOOP* finds $CX=0$, control transfers to the instruction immedi-

Table 3-3. Interpretation of Conditional Transfers

| Unsigned Conditional Transfers | | |
|--------------------------------|---|----------------------------------|
| Mnemonic | Condition Tested | "Jump If. . ." |
| JA/JNBE | $(CF \text{ or } ZF) = 0$ | above/not below nor equal |
| JAE/JNB | $CF = 0$ | above or equal/not below |
| JB/JNAE | $CF = 1$ | below/not above nor equal |
| JBE/JNA | $(CF \text{ or } ZF) = 1$ | below or equal/not above |
| JC | $CF = 1$ | carry |
| JE/JZ | $ZF = 1$ | equal/zero |
| JNC | $CF = 0$ | not carry |
| JNE/JNZ | $ZF = 0$ | not equal/not zero |
| JNP/JPO | $PF = 0$ | not parity/parity odd |
| JP/JPE | $PF = 1$ | parity/parity even |
| Signed Conditional Transfers | | |
| Mnemonic | Condition Tested | "Jump If. . ." |
| JG/JNLE | $((SF \text{ xor } OF) \text{ or } ZF) = 0$ | greater/not less nor equal |
| JGE/JNL | $(SF \text{ xor } OF) = 0$ | greater or equal/not less |
| JL/JNGE | $(SF \text{ xor } OF) = 0$ | less/not greater nor equal |
| JLE/JNG | $((SF \text{ xor } OF) \text{ or } ZF) = 1$ | less or equal/not greater |
| JNO | $OF = 0$ | not overflow |
| JNS | $SF = 0$ | not sign (positive, including 0) |
| JO | $OF = 1$ | overflow |
| JS | $SF = 1$ | sign (negative) |

ately following the LOOP instruction. If the value of CX is initially zero, then the LOOP executes 65536 times.

Example: LOOP START_LOOP

Each time the program encounters this instruction, it decrements CX and then tests it. If the value of CX is non-zero, then the program branches to the instruction labeled START_LOOP. If the value in CX is zero, then the program continues with the instruction that follows the LOOP instruction.

LOOPE (Loop While Equal) and *LOOPZ (Loop While Zero)* are physically the same instruction. These instructions auto-decrement the CX register before testing CX and ZF for the branch conditions. If CX is non-zero and ZF=1, the program branches to the target label specified in the instruction. If LOOPE or LOOPZ finds that CX=0 or ZF=0, control transfers to the instruction immediately succeeding the LOOPE or LOOPZ instruction.

Example: LOOPE START_LOOP (or LOOPZ START_LOOP)

Each time the program encounters this instruction, it decrements CX and tests CX and ZF. If the value in CX is non-zero and the value of ZF is 1, the program branches to the instruction labeled START_LOOP. If CX=0 or ZF=0, the program continues with the instruction that follows the LOOPE (or LOOPZ) instruction.

LOOPNE (Loop While Not Equal) and *LOOPNZ (Loop While Not Zero)* are physically the same instruction. These instructions

auto-decrement the CX register before testing CX and ZF for the branch conditions. If CX is non-zero and ZF=0, the program branches to the target label specified in the instruction. If LOOPNE or LOOPNZ finds that CX=0 or ZF=1, control transfers to the instruction immediately succeeding the LOOPNE or LOOPNZ instruction.

Example: LOOPNE START_LOOP (or LOOPNZ START_LOOP)

Each time the program encounters this instruction, it decrements CX and tests CX and ZF. If the value of CX is non-zero and the value of ZF is 0, the program branches to the instruction labeled START_LOOP. If CX=0 or ZF=1, the program continues with the instruction that follows the LOOPNE (or LOOPNZ) instruction.

3.6.2.3 EXECUTING A LOOP OR REPEAT ZERO TIMES

JCXZ (Jump if CX Zero) branches to the label specified in the instruction if it finds a value of zero in CX. Sometimes, it is desirable to design a loop that executes zero times if the count variable in CX is initialized to zero. Because the LOOP instructions (and repeat prefixes) decrement CX before they test it, a loop will execute 65536 times if the program enters the loop with a zero value in CX. A programmer may conveniently overcome this problem with JCXZ, which enables the program to branch around the code within the loop if CX is zero when JCXZ executes.

Example: JCXZ TARGETLABEL

Causes the program to branch to the instruction labeled TARGETLABEL if CX=0 when the instruction executes.

3.6.3 Software-Generated Interrupts

The INT *n* and INTO instructions allow the programmer to specify a transfer to an interrupt service routine from within a program. Interrupts 0-31 are reserved by Intel.

3.6.3.1 SOFTWARE INTERRUPT INSTRUCTION

INT n (Software Interrupt) activates the interrupt service routine that corresponds to the number coded within the instruction. Interrupt type 3 is reserved for internal software-generated interrupts. However, the INT instruction may specify any interrupt type to allow multiple types of internal interrupts or to test the operation of a service routine. The interrupt service routine terminates with an IRET instruction that returns control to the instruction that follows INT.

Example: INT 3

Transfers control to the interrupt service routine specified by a type 3 interrupt.

Example: INT 0

Transfers control to the interrupt service routine specified by a type 0 interrupt, which is reserved for a divide error.

INTO (Interrupt on Overflow) invokes a type 4 interrupt if OF is set when the INTO instruction executes. The type 4 interrupt is reserved for this purpose.

Example: INTO

If the result of a previous operation has set OF and no intervening operation has reset OF, then INTO invokes a type 4 interrupt. The interrupt service routine terminates with an IRET instruction, which returns control to the instruction following INTO.

3.7 CHARACTER TRANSLATION AND STRING INSTRUCTIONS

The instructions in this category operate on characters or string elements rather than on logical or numeric values.

3.7.1 Translate Instruction

XLAT (Translate) replaces a byte in the AL register with a byte from a user-coded translation table. When XLAT is executed, AL should have the unsigned index to the table addressed by BX. XLAT changes the contents of AL from table index to table entry. BX is unchanged. The XLAT instruction is useful for translating from one coding system to another such as from ASCII to EBCDIC. The translate table may be up to 256 bytes long. The value placed in the AL register serves as an index to the location of the corresponding translation value. Used with a LOOP instruction, the XLAT instruction can translate a block of codes up to 64K bytes long.

Example: XLAT

Replaces the byte in AL with the byte from the translate table that is selected by the value in AL.

3.7.2 String Manipulation Instructions and Repeat Prefixes

The string instructions (also called primitives) operate on string elements to move, compare, and scan byte or word strings. One-byte repeat prefixes can cause the operation of a string primitive to be repeated to process strings as long as 64K bytes.

The repeated string primitives use the direction flag, DF, to specify left-to-right or right-to-left string processing, and use a count in CX to limit the processing operation. These instructions use the register pair DS:SI to point to the source string element and the register pair ES:DI to point to the destination.

One of two possible opcodes represent each string primitive, depending on whether it is operating on byte strings or word strings. The string primitives are generic and require one or more operands along with the primitive to determine the size of the string elements being processed. These operands do not determine the addresses of the strings; the addresses must already be present in the appropriate registers.

Each repetition of a string operation using the Repeat prefixes includes the following steps:

1. Acknowledge pending interrupts.
2. Check CX for zero and stop repeating if CX is zero.
3. Perform the string operation once.
4. Adjust the memory pointers in DS:SI and ES:DI by incrementing SI and DI if DF is 0 or by decrementing SI and DI if DF is 1.
5. Decrement CX (this step does not affect the flags).
6. For SCAS (Scan String) and CMPS (Compare String), check ZF for a match with the repeat condition and stop repeating if the ZF fails to match.

The Load String and Store String instructions allow a program to perform arithmetic or logical operations on string characters (using AX for word strings and AL for byte strings). Repeated operations that include instructions other than string primitives must use the loop instructions rather than a repeat prefix.

3.7.2.1 STRING MOVEMENT INSTRUCTIONS

REP (Repeat While CX Not Zero) specifies a repeated operation of a string primitive. The REP prefix causes the hardware to automatically repeat the associated string primitive until CX=0. This form of iteration allows the

CPU to process strings much faster than would be possible with a regular software loop.

When the REP prefix accompanies a MOVSW instruction, it operates as a memory-to-memory block transfer. To set up for this operation, the program must initialize CX and the register pairs DS:SI and ES:DI. CX specifies the number of bytes or words in the block.

If DF=0, the program must point DS:SI to the first element of the source string and point ES:DI to the destination address for the first element. If DF=1, the program must point these two register pairs to the last element of the source string and to the destination address for the last element, respectively.

Example: REP MOVSW

The processor checks the value in CX for zero. If this value is not zero, the processor moves a word from the location pointed to by DS:SI to the location pointed to by ES:DI and increments SI and DI by two (if DF=0). Next, the processor decrements CX by one and returns to the beginning of the repeat cycle to check CX again. After CX decrements to zero, the processor executes the instruction that follows.

MOVSW (Move String) moves the string character pointed to by the combination of DS and SI to the location pointed to by the combination of ES and DI. This is the only memory-to-memory transfer supported by the instruction set of the base architecture. MOVSB operates on byte elements. The destination segment register cannot be overridden by a segment override prefix while the source segment register can be overridden.

Example: MOVSW

Moves the contents of the memory byte pointed to by DS:SI to the location pointed to by ES:DI.

3.7.2.2 OTHER STRING OPERATIONS

CMPS (Compare Strings) subtracts the destination string element (ES:DI) from the source string element (DS:SI) and updates the flags AF, SF, PF, CF and OF. If the string elements are equal, ZF=1; otherwise, ZF=0. If DF=0, the processor increments the memory pointers (SI and DI) for the two strings. The segment register used for the source address can be changed with a segment override prefix while the destination segment register cannot be overridden.

Example: CMPSB

Compares the source and destination string elements with each other and returns the result of the comparison to ZF.

SCAS (Scan String) subtracts the destination string element at ES:DI from AX or AL and updates the flags AF, SF, ZF, PF, CF and OF. If the values are equal, ZF=1; otherwise, ZF=0. If DF=0, the processor increments the memory pointer (DI) for the string. The segment register used for the source address can be changed with a segment override prefix while the destination segment register cannot be overridden.

Example: SCASW

Compares the value in AX with the destination string element.

REPE/REPZ (Repeat While CX Equal/Zero) and *REPNE/REPNZ (Repeat While CX Not Equal/Not Zero)* are the prefixes that are used exclusively with the SCAS (Scan String) and CMPS (Compare String) primitives.

The difference between these two types of prefix bytes is that REPE/REPZ terminates when ZF=0 and REPNE/REPNZ terminates when ZF=1. ZF does not require initialization before execution of a repeated string instruction.

When these prefixes modify either the SCAS or CMPS primitives, the processor compares the value of the current string element with the value in AX for word elements or with the value in AL for byte elements. The resulting state of ZF can then limit the operation of the repeated operation as well as a zero value in CX.

Example: REPE SCASB

Causes the processor to scan the string pointed to by ES:DI until it encounters a match with the byte value in AL or until CX decrements to zero.

LODS (Load String) places the source string element at DS:SI into AX for word strings or into AL for byte strings.

Example: LODSW

Loads AX with the value pointed to by DS:SI.

3.8 ADDRESS MANIPULATION INSTRUCTIONS

The set of address manipulation instructions provide a way to perform address calculations or to move to a new data segment or extra segment.

LEA (Load Effective Address) transfers the offset of the source operand (rather than its value) to the destination operand. The source operand must be a memory operand, and the destination operand must be a 16-bit general register (AX, DX, BX, CX, BP, SP, SI, or DI).

LEA does not affect any flags. This instruction is useful for initializing the registers before the execution of the string primitives or the XLAT instruction.

Example: LEA BX EBCDIC_TABLE

Causes the processor to place the address of the starting location of the table labeled EBCDIC_TABLE into BX.

LDS (Load Pointer Using DS) transfers a 32-bit pointer variable from the source operand to DS and the destination register. The source operand must be a memory operand, and the destination operand must be a 16-bit general register (AX, DX, BX, CX, BP, SP, SI or DI). DS receives the high-order segment word of the pointer. The destination register receives the low-order word, which points to a specific location within the segment.

Example: LDS SI, STRING_X

Loads DS with the word identifying the segment pointed to by STRING_X, and loads the offset of STRING_X into SI. Specifying SI as the destination operand is a convenient way to prepare for a string operation on a source string that is not in the current data segment.

LES (Load Pointer Using ES) operates identically to LDS except that ES receives the offset word rather than DS.

Example: LES DI, DESTINATION_X

Loads ES with the word identifying the segment pointed to by DESTINATION_X, and loads the offset of DESTINATION_X into DI. This instruction provides

a convenient way to select a destination for a string operation if the desired location is not in the current extra segment.

3.9 FLAG CONTROL INSTRUCTIONS

The flag control instructions provide a method of changing the state of bits in the flag register.

3.9.1 Carry Flag Control Instructions

The carry flag instructions are useful in conjunction with rotate-with-carry instructions RCL and RCR. They can initialize the carry flag, CF, to a known state before execution of a rotate that moves the carry bit into one end of the rotated operand.

STC (Set Carry Flag) sets the carry flag (CF) to 1.

Example: STC

CLC (Clear Carry Flag) zeros the carry flag (CF).

Example: CLC

CMC (Complement Carry Flag) reverses the current status of the carry flag (CF).

Example: CMC

3.9.2 Direction Flag Control Instructions

The direction flag control instructions are specifically included to set or clear the direction flag, DF, which controls the left-to-right or right-to-left direction of string processing. If DF=0, the processor automatically increments the string memory pointers, SI and DI, after each execution of a string primitive. If DF=1, the processor decrements these pointer values. The initial state of DF is 0.

CLD (Clear Direction Flag) zeros DF, causing the string instructions to auto-increment SI and/or DI. CLD does not affect any other flags.

Example: CLD

STD (Set Direction Flag) sets DF to 1, causing the string instructions to auto-decrement SI and/or DI. STD does not affect any other flags.

Example: STD

3.9.3 Flag Transfer Instructions

Though specific instructions exist to alter CF and DF, there is no direct method of altering the other flags. The flag transfer instructions allow a program to alter the other flag bits with the bit manipulation instructions after transferring these flags to the stack or the AH register.

The PUSHF and POPF instructions are also useful for preserving the state of the flag register before executing a procedure.

LAHF (Load AH from Flags) copies SF, ZF, AF, PF, and CF to AH bits 7, 6, 4, 2, and 0, respectively (see figure 3-13). The contents of the remaining bits (5, 3, and 1) are undefined. The flags remain unaffected. This instruction can assist in converting 8080/8085 assembly language programs to run on the base architecture of the iAPX 86, 88, 186, and 286.

Example: LAHF

SAHF (Store AH into Flags) transfers bits 7, 6, 4, 2, and 0 from AH into SF, ZF, AF, PF, and CF, respectively (see figure 3-13). This instruction also provides 8080/8085 compatibility with the iAPX 86, 88, 186, and 286.

Example: SAHF

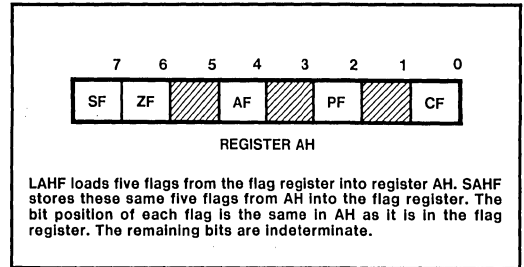


Figure 3-13. LAHF and SAHF

PUSHF (Push Flags) decrements SP by two and then transfers all flags to the word at the top of stack pointed to by SP (see figure 3-14). The flags remain unaffected. This instruction enables a procedure to save the state of the flag register for later use.

Example: PUSHF

POPF (Pop Flags) transfers specific bits from the word at the top of stack into the low-order byte of the flag register (see figure 3-14). The processor then increments SP by two.


Note that an application program in the protected virtual address mode may not alter IOPL (the I/O privilege level flag) unless the program is executing at privilege level 0. A program may alter IF (the interrupt flag) only when executing at a level that is at least as privileged as IOPL.

Procedures may use this instruction to restore the flag status from a previous value.

Example: POPF

3.10 BINARY-CODED DECIMAL ARITHMETIC INSTRUCTIONS

These instructions adjust the results of a previous arithmetic operation to produce a valid packed or unpacked decimal result. These instructions operate only on AL or AH registers.



PUSHF decrements **SP** by 2 bytes (1 word) and copies the contents of the flag register to the top of stack. **POPF** loads the flag register with the contents of the last word pushed onto the stack. The bit position of each flag is the same in the stack word as it is in the flag register. Only programs executing at the highest privilege level (level 0) may alter the 2-bit **IOPL** flag. Only programs executing at a level at least as privileged as that indicated by **IOPL** may alter **IF**.

Figure 3-14. **PUSHF** and **POPF**

3.10.1 Packed BCD Adjustment Instructions

DAA (Decimal Adjust) corrects the result of adding two valid packed decimal operands in **AL**. **DAA** must always follow the addition of two pairs of packed decimal numbers (one digit in each nibble) to obtain a pair of valid packed decimal digits as results. The carry flag will be set if carry was needed.

Example: **DAA**

DAS (Decimal Adjust for Subtraction) corrects the result of subtracting two valid packed decimal operands in **AL**. **DAS** must always follow the subtraction of one pair of packed decimal numbers (one digit in each nibble) from another to obtain a pair of valid packed decimal digits as results. The carry flag will be set if a borrow was needed.

Example: **DAS**

3.10.2 Unpacked BCD Adjustment Instructions

AAA (ASCII Adjust for Addition) changes the contents of register **AL** to a valid unpacked decimal number, and zeros the top 4 bits. **AAA** must always follow the addition of two unpacked decimal operands in **AL**. The carry flag will be set and **AH** will be incremented if a carry was necessary.

Example: **AAA**

AAS (ASCII Adjust for Subtraction) changes the contents of register **AL** to a valid unpacked decimal number, and zeros the top 4 bits. **AAS** must always follow the subtraction of one unpacked decimal operand from another in **AL**. The carry flag will be set and **AH** decremented if a borrow was necessary.

Example: **AAS**

AAM (ASCII Adjust for Multiplication) corrects the result of a multiplication of two valid unpacked decimal numbers. **AAM** must always follow the multiplication of two decimal numbers to produce a valid decimal result. The high order digit will be left in **AH**, the low order digit in **AL**.

Example: **AAM**

AAD (ASCII Adjust for Division) modifies the numerator in **AH** and **AL** to prepare for the division of two valid unpacked decimal operands so that the quotient produced by the division will be a valid unpacked decimal number. **AH** should contain the high-order digit and **AL** the low-order digit. This instruction will adjust the value and leave it in **AL**. **AH** will contain 0.

Example: **AAD**

3.11 TRUSTED INSTRUCTIONS

When operating in Protected Mode (Chapter 6 and following), the iAPX 286 processor restricts the execution of trusted instructions according to the Current Privilege Level (CPL) and the current value of IOPL, the 2-bit I/O privilege flag. Only a program operating at the highest privilege level (level 0) may alter the value of IOPL. A program may execute trusted instructions only when executing at a level that is at least as privileged as that specified by IOPL.

Trusted instructions control I/O operations, interprocessor communications in a multiprocessor system, interrupt enabling, and the HLT instruction.

These protection considerations do not apply in the real address mode.

3.11.1 Trusted and Privileged Restrictions on POPF and IRET

POPF (POP Flags) and *IRET (Interrupt Return)* are not affected by IOPL unless they attempt to alter IF (flag register bit 9). To change IF, POPF must be part of a program that is executing at a privilege level greater than or equal to that specified by IOPL. Any attempt to change IF when $CPL \geq 0$ will be ignored (i.e., the IF flag will be ignored). To change the IOPL field, CPL must be zero.

3.11.2 Machine State Instructions

These trusted instructions affect the machine state control interrupt response, the processor halt state, and the bus LOCK signal that regulates memory access in multiprocessor systems.

CLI (Clear Interrupt-Enable Flag) and *STI (Set Interrupt-Enable Flag)* alter bit 9 in the flag register. When $IF=0$, the processor responds only to internal interrupts and to non-maskable external interrupts. When

$IF=1$, the processor responds to all interrupts. An interrupt service routine might use these instructions to avoid further interruption while it processes a previous interrupt request. As with the other flag bits, the processor clears IF during initialization. These instructions may be executed only if $CPL \leq IOPL$. A protection exception will occur if they are executed when $CPL > IOPL$.

Example: STI

Sets $IF=1$, which enables the processing of maskable external interrupts.

Example: CLI

Sets $IF=0$ to disable maskable interrupt processing.

HLT (Halt) causes the processor to suspend processing operations pending an interrupt or a system reset. This trusted instruction provides an alternative to an endless software loop in situations where a program must wait for an interrupt. The return address saved after the interrupt will point to the instruction immediately following HLT. This instruction may be executed only when $CPL = 0$.

Example: HLT

LOCK (Assert Bus Lock) is a 1-byte prefix code that causes the processor to assert the bus LOCK signal during execution of the instruction that follows. LOCK does not affect any flags. LOCK may be used only when $CPL \leq IOPL$. A protection exception will occur if LOCK is used when $CPL > IOPL$.

3.11.3 Input and Output Instructions

These trusted instructions provide access to the processor's I/O ports to transfer data to and from peripheral devices. In Protected

Mode, these instructions may be executed only when $CPL \leq IOPL$.

IN (Input from Port) transfers a byte or a word from an input port to AL or AX. If a program specifies AL with the IN instruction, the processor transfers 8 bits from the selected port to AL. Alternately, if a program specifies AX with the IN instruction, the processor transfers 16 bits from the port to AX.

The program can specify the number of the port in two ways. Using an immediate byte constant, the program can specify 256 8-bit ports numbered 0 through 255 or 128 16-bit ports numbered 0,2,4,...,252,254. Using the current value contained in DX, the program can specify 8-bit ports numbered 0 through 65,535, or 16-bit ports using even-numbered ports in the same range.

Example: IN AL,
 BYTE_PORT_NUMBER

Transfers 8 bits to AL
from the port identified
by the immediate constant
BYTE_PORT_NUMBER.

OUT (Output to Port) transfers a byte or a word to an output port from AL or AX. The program can specify the number of the port using the same methods of the IN instruction.

Example: OUT AX, DX

Transfers 16 bits from AX to the
port identified by the 16-bit
number contained in DX.

INS and OUTS (Input String and Output String) cause block input or output operations using a Repeat prefix. See Chapter 4 for more information on INS and OUTS.

3.12 PROCESSOR EXTENSION INSTRUCTIONS

Processor Extension provides an extension to the instruction set of the base architecture (e.g., 80287). The NPX extends the instruction set of the CPU-based architecture to support high-precision integer and floating-point calculations. This extended instruction set includes arithmetic, comparison, transcendental, and data transfer instructions. The NPX also contains a set of useful constants to enhance the speed of numeric calculations.

A program contains instructions for the NPX in line with the instructions for the CPU. The system executes these instructions in the same order as they appear in the instruction stream. The NPX operates concurrently with the CPU to provide maximum throughput for numeric calculations.

The software emulation of the NPX is transparent to application software but requires more time for execution.

3.12.1 Processor Extension Synchronization Instructions

Escape and wait instructions allow a processor extension such as the 80287 NPX to obtain instructions and data from the system bus and to wait for the NPX to return a result.

ESC (Escape) identifies floating point numeric instructions and allows the iAPX 286 to send the opcode to the NPX or to transfer a memory operand to the NPX. The 80287 NPX uses the Escape instructions to perform high-performance, high-precision floating point arithmetic that conforms to the IEEE floating point standard 754.

Example: ESC 6, ARRAY [SI]

The CPU sends the escape opcode 6 and the location of the array pointed to by SI to the NPX.

WAIT (*Wait*) suspends program execution until the iAPX 286 CPU detects a signal on the $\overline{\text{BUSY}}$ pin. In an iAPX 286/20 configuration that includes a numeric processor extension, the NPX activates the $\overline{\text{BUSY}}$ pin to signal that it has completed its processing task and that the CPU may obtain the results.

Example: `WAIT`

3.12.2 Numeric Data Processor Instructions

This section describes the categories of instructions available with Numeric Data Processor systems that include a Numeric Processor Extension or a software emulation of this processor extension. Refer to the Numeric Supplement following Appendix D and to the 80287 data sheet for more information.

3.12.2.1 ARITHMETIC INSTRUCTIONS

The extended instruction set includes not only the four arithmetic operations (add, subtract, multiply, and divide), but also subtract-reversed and divide-reversed instructions. The arithmetic functions include square root, modulus, absolute value, integer part, change sign, scale exponent, and extract exponent instructions.

3.12.2.2 COMPARISON INSTRUCTIONS

The comparison operations are the compare, examine, and test instructions. Special forms of the compare instruction can optimize algorithms by allowing comparisons of binary integers with real numbers in memory.

3.12.2.3 TRANSCENDENTAL INSTRUCTIONS

The instructions in this group perform the otherwise time-consuming calculations for all common trigonometric, inverse trigonometric, hyperbolic, inverse hyperbolic, logarithmic, and exponential functions. The transcendental instructions include tangent, arctangent, $2^x - 1$, $Y \cdot \log_2 X$, and $Y \cdot \log_2 (X+1)$.

3.12.2.4 DATA TRANSFER INSTRUCTIONS

The data transfer instructions move operands among the registers and between a register and memory. This group includes the load, store, and exchange instructions.

3.12.2.5 CONSTANT INSTRUCTIONS

Each of the constant instructions loads a commonly used constant into an NPX register. The values have a real precision of 64 bits and are accurate to approximately 19 decimal places. The constants loaded by these instructions include 0, 1, Pi, $\log_e 10$, $\log_2 e$, $\log_{10} 2$, and $\log 2_e$.

CHAPTER 4

EXTENDED INSTRUCTION SET

The instructions described in this chapter extend the capabilities of the base architecture instruction set described in Chapter 3. These extensions consist of new instructions and variations of some instructions that are not strictly part of the base architecture (in other words, not included in the iAPX 86, 88). These instructions are also available in the iAPX 186, 188. The instruction variations, described in Chapter 3, include the immediate forms of the PUSH and MUL instructions, PUSHA, POPA, and the privilege level restrictions on POPF.

New instructions described in this chapter include the string input and output instructions (INS and OUTS), the ENTER procedure and LEAVE procedure instructions, and the check index BOUND instruction.

4.1 BLOCK I/O INSTRUCTIONS

REP, the Repeat prefix, modifies INS and OUTS (the string I/O instructions) to provide a means of transferring blocks of data between an I/O port and Memory. These block I/O instructions are string primitives. They simplify programming and increase the speed of data transfer by eliminating the need to use a separate LOOP instruction or an intermediate register to hold the data.

INS and OUTS are trusted instructions. To use trusted instructions, a program must execute at a privilege level at least as privileged as that specified by the 2-bit IOPL flag ($CPL \leq IOPL$). Any attempt by a less-privileged program to use a trusted instruction results in a protection exception. See Chapter 7 for information on protection concepts.

One of two possible opcodes represents each string primitive depending on whether it

operates on byte strings or word strings. After each transfer, the memory address in SI or DI is updated by 1 for byte values and by 2 for word values. The value in the DF field determines if SI or DI is to be auto incremented ($DF=0$) or auto decremented ($DF=1$).

INS and OUTS use DX to specify I/O ports numbered 0 through 65,535 or 16-bit ports using only even port addresses in the same range.

INS (Input String from Port) transfers a byte or a word string element from an input port to memory. If a program specifies INSB, the processor transfers 8 bits from the selected port to the memory location indicated by ES:DI. Alternately, if a program specifies INSW, the processor transfers 16 bits from the port to the memory location indicated by ES:DI. The destination segment register choice (ES) cannot be changed for the INS instruction.

Combined with the REP prefix, INS moves a block of information from an input port to a series of consecutive memory locations.

Example: REP INSB

The processor repeatedly transfers 8 bits to the memory location indicated by ES:DI from the port selected by the 16-bit port number contained in DX. Following each byte transfer, the CPU decrements CX. The instruction terminates the block transfer when $CX=0$. After decrementing CX, the processor increments DI by one if $DF=0$. It decrements DI by one if $DF=1$.

OUTS (Output String to Port) transfers a byte or a word string element to an output port from memory. Combined with the REP prefix, *OUTS* moves a block of information from a series of consecutive memory locations indicated by DS:SI to an output port.

Example: REP OUTS WSTRING

Assuming that the program declares WSTRING to be a word-length string element, the assembler uses the 16-bit form of the *OUTS* instruction to create the object code for the program. The processor repeatedly transfers words from the memory locations indicated by DI to the output port selected by the 16-bit port number in DX.

Following each word transfer, the CPU decrements CX. The instruction terminates the block transfer when CX=0. After decrementing CX, the processor increments SI by two to point to the next word in memory if DF=0, it decrements SI by two if DF=1.

4.2 HIGH-LEVEL INSTRUCTIONS

The instructions in this section provide machine-language functions normally found only in high-level languages. These instructions include ENTER and LEAVE, which simplify the programming of procedures, and BOUND, which provides a simple method of testing an index against its predefined range.

ENTER (Enter Procedure) creates the stack frame required by most block-structured high-level languages. A LEAVE instruction at the end of a procedure complements an ENTER at the beginning of the procedure to simplify stack management and to control access to variables for nested procedures.

Example: ENTER 2048,3

Allocates 2048 bytes of dynamic storage on the stack and sets up pointers to two previous stack frames in the stack frame that ENTER creates for this procedure.

The ENTER instruction includes two parameters. The first parameter specifies the number of bytes of dynamic storage to be allocated on the stack for the routine being entered. The second parameter corresponds to the lexical nesting level (0-31) of the routine. (Note that the lexical level has no relationship to either the protection privilege levels or to the I/O privilege level.)

The specified lexical level determines how many sets of stack frame pointers the CPU copies into the new stack frame from the preceding frame. This list of stack frame pointers is sometimes called the "display." The first word of the display is a pointer to the last stack frame. This pointer enables a LEAVE instruction to reverse the action of the previous ENTER instruction by effectively discarding the last stack frame.

After ENTER creates the new display for a procedure, it allocates the dynamic storage space for that procedure by decrementing SP by the number of bytes specified in the first parameter. This new value of SP serves as a base for all PUSH and POP operations within that procedure.

To enable a procedure to address its display, ENTER leaves BP pointing to the beginning of the new stack frame. Data manipulation instructions that specify BP as a base register implicitly address locations within the stack segment instead of the data segment. Two forms of the ENTER instruction exist: nested and non-nested. If the lexical level is 0, the

The Formal Definition Of The ENTER Instruction For All Cases Is Given By The Following Listing. LEVEL Denotes The Value Of The Second Operand.

```

Push BP
Set a temporary value FRAME_PTR := SP
If LEVEL > 0 then
  Repeat (LEVEL - 1) times:
    BP := BP - 2
    Push the word pointed to by BP
  End repeat
Push FRAME_PTR
End If
BP := FRAME_PTR
SP := SP - first operand.

```

Figure 4-1. Formal Definition of the ENTER Instruction

non-nested form is used. Since the second operand is 0, ENTER pushes BP, copies SP to BP and then subtracts the first operand from SP. The nested form of ENTER occurs when the second parameter (lexical level) is not 0. Figure 4-1 gives the formal definition of ENTER.

The main procedure (with other procedures nested within) operates at the highest lexical level, level 1. The first procedure it calls operates at the next deeper lexical level, level 2. A level 2 procedure can access the variables of the main program which are at fixed locations specified by the compiler. In the case of level 1, ENTER allocates only the requested dynamic storage on the stack because there is no previous display to copy.

A program operating at a higher lexical level calling a program at a lower lexical level requires that the called procedure should have access to the variables of the calling program. ENTER provides this access through a display that provides addressability to the calling program's stack frame.

A procedure calling another procedure at the same lexical level implies that they are parallel procedures and that the called procedure should not have access to the variables of the calling procedure. In this case, ENTER copies only that portion of the display from the

calling procedure which refers to previously nested procedures operating at higher lexical levels. The new stack frame does not include the pointer for addressing the calling procedure's stack frame.

ENTER treats a reentrant procedure as a procedure calling another procedure at the same lexical level. In this case, each succeeding iteration of the reentrant procedure can address only its own variables and the variables of the calling procedures at higher lexical levels. A reentrant procedure can always address its own variables; it does not require pointers to the stack frames of previous iterations.

By copying only the stack frame pointers of procedures at higher lexical levels, ENTER makes sure that procedures access only those variables of higher lexical levels, not those at parallel lexical levels (see figure 4-2). Figures 4-2a through 4-2d demonstrate the actions of the ENTER instruction if the modules shown in figure 4-1 were to call one another in alphabetic order.

Block-structured high-level languages can use the lexical levels defined by ENTER to control access to the variables of previously nested procedures. For example, if PROCEDURE A calls PROCEDURE B which, in turn, calls PROCEDURE C, then PROCEDURE C will have access to the variables of MAIN and PROCEDURE A, but not PROCEDURE B because they operate at the same lexical level. Following is the complete definition of the variable access for figure 4-2.

1. MAIN PROGRAM has variables at fixed locations.
2. PROCEDURE A can access only the fixed variables of MAIN.

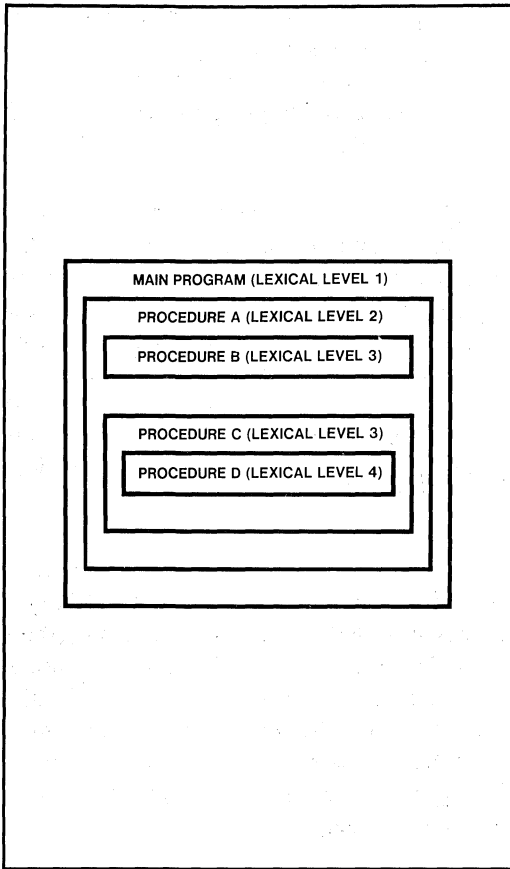


Figure 4-2. Variable Access in Nested Procedures

3. PROCEDURE B can access only the variables of PROCEDURE A and MAIN. PROCEDURE B cannot access the variables of PROCEDURE C or PROCEDURE D.
4. PROCEDURE C can access only the variables of PROCEDURE A and MAIN. PROCEDURE C cannot access the variables of PROCEDURE B or PROCEDURE D.
5. PROCEDURE D can access the variables of PROCEDURE C, PROCEDURE A, and MAIN. PROCEDURE D cannot access the variables of PROCEDURE B.

ENTER at the beginning of the MAIN PROGRAM creates dynamic storage space for MAIN but copies no pointers. The first and only word in the display points to itself because there is no previous value for LEAVE to return to BP. See figure 4-2a.

After MAIN calls PROCEDURE A, ENTER creates a new display for PROCEDURE A with the first word pointing to the previous value of BP (BPM for LEAVE to return to the MAIN stack frame) and the second word pointing to the current value of BP. Procedure A can access variables in MAIN since MAIN is at level 1. Therefore the base for the dynamic storage for MAIN is at $[BP - 2]$. All dynamic variables for MAIN will be at a fixed offset from this value. See figure 4-2b.

After PROCEDURE A calls PROCEDURE B, ENTER creates a new display for PROCEDURE B with the first word pointing to the previous value of BP, the second word pointing to the value of BP for MAIN, and the third word pointing to the value of BP for A and the last word pointing to the current BP. B can access variables in A and MAIN by fetching from the display the base addresses of the respective dynamic storage areas. See figure 4-2c.

After PROCEDURE B calls PROCEDURE C, ENTER creates a new display for PROCEDURE C with the first word pointing to the previous value of BP, the second word pointing to the value of BP for MAIN, and the third word pointing to the BP value for A and the third word pointing to the current value of BP. Because PROCEDURE B and PROCEDURE C have the same lexical level, PROCEDURE C is not allowed access to variables in B and therefore does not receive a pointer to the beginning of PROCEDURE B's stack frame. See figure 4-2d.

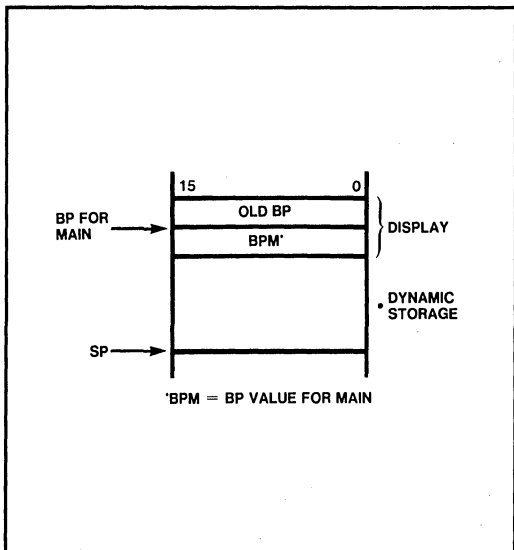


Figure 4-2a. Stack Frame for MAIN at Level 1

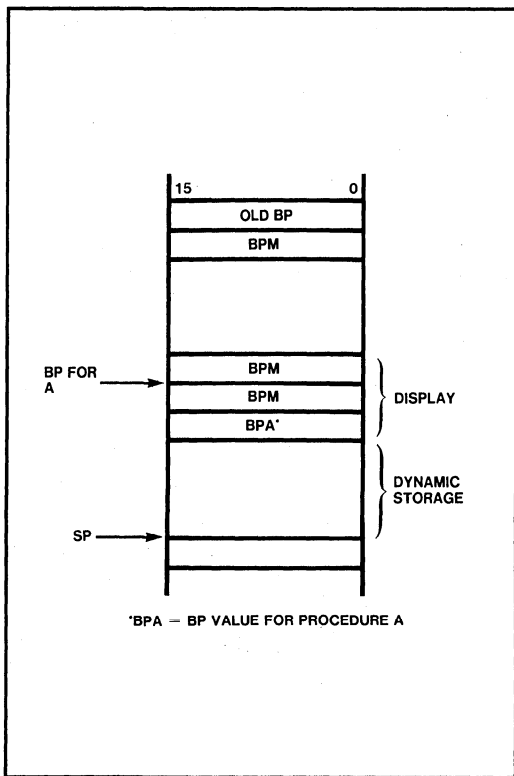


Figure 4-2b. Stack Frame for Procedure A

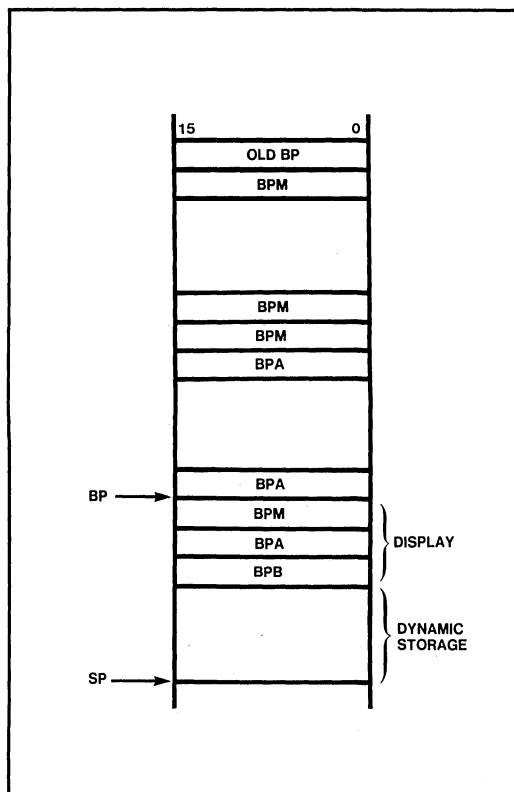


Figure 4-2c. Stack Frame for Procedure B at Level 3 Called from A

LEAVE (Leave Procedure) reverses the action of the previous *ENTER* instruction. The *LEAVE* instruction does not include any operands.

Example: *LEAVE*

First, *LEAVE* copies *BP* to *SP* to release all stack space allocated to the procedure by the most recent *ENTER* instruction. Next, *LEAVE* pops the old value of *BP* from the stack. A subsequent *RET* instruction can then remove any arguments that were pushed on the stack by the calling program for use by the called procedure.

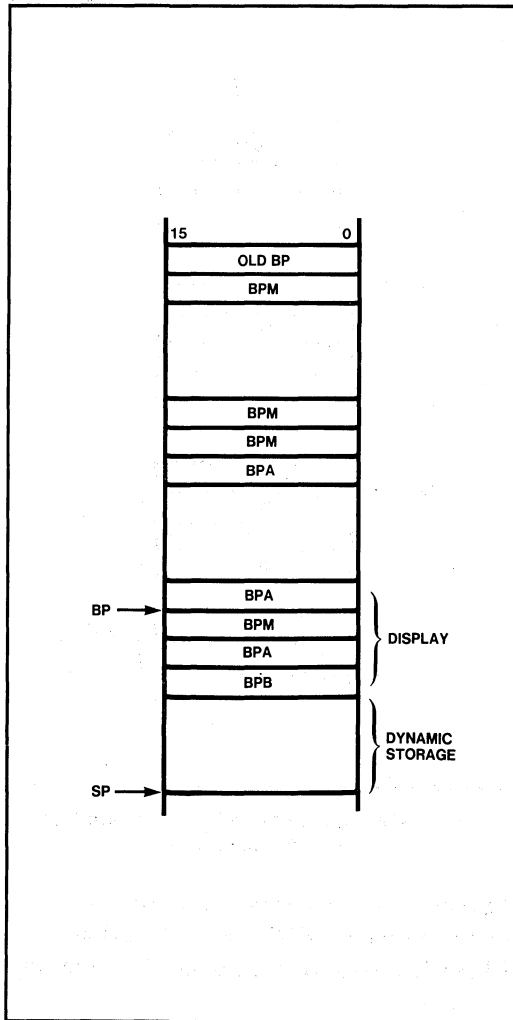


Figure 4-2d. Stack Frame for Procedure C at Level 3 Called from B

BOUND (Detect Value Out of Range) verifies that the signed value contained in the specified register lies within specified limits. An interrupt (INT 5) occurs if the value contained in the register is less than the lower bound or greater than the upper bound.

The **BOUND** instruction includes two operands. The first operand specifies the register being tested. The second operand contains the effective relative address of the two signed **BOUND** limit values. The **BOUND** instruction assumes that it can obtain the upper limit from the memory word that immediately follows the lower limit. These limit values cannot be register operands; if they are, an invalid opcode exception occurs.

BOUND is useful for checking array bounds before using a new index value to access an element within the array. **BOUND** provides a simple way to check the value of an index register before the program overwrites information in a location beyond the limit of the array.

The two-word block of memory that specifies the lower and upper limits of an array might typically reside just before the array itself. This makes the array bounds accessible at a constant offset of -4 from the beginning of the array. Because the address of the array will already be present in a register, this practice avoids extra calculations to obtain the effective address of the array bounds.

Example: `BOUND BX,ARRAY-4`

Compares the value in **BX** with the lower limit at address `ARRAY-4` and the upper limit at address `ARRAY-2`. If the signed value in **BX** is less than the lower bound or greater than the upper bound, the interrupt for this instruction (INT 5) occurs. Otherwise, this instruction has no effect.

CHAPTER 5

REAL ADDRESS MODE

The iAPX 286 can be operated in either of two modes according to the status of the Protection Enabled bit of the MSW status register. In contrast to the “modes” and “mode bits” of some processors, however, the iAPX 286 modes do not represent a radical transition between conflicting architectures. Instead, the setting of the Protection Enabled bit simply determines whether certain advanced features, in addition to the baseline architecture of the iAPX 286, are to be made available to system designers and programmers.

If the Protection Enabled (PE) bit is set by the programmer, the processor changes into *Protected Virtual Address Mode*. In this mode of operation, memory addressing is performed in terms of virtual addresses, with on-chip mapping mechanisms performing the virtual-to-physical translation. Only in this mode can the system designer make use of the advanced architectural features of the iAPX 286: virtual memory support, system-wide protection, and built-in multitasking mechanisms are among the new features provided in this mode of operation. Refer to Part II of this manual (Chapters 6 through 11) for details on Protected Mode operation.

Initially, upon system reset, the processor starts up in *Real Address Mode*. In this mode of operation, all memory addressing is performed in terms of *real* physical addresses. In effect, the architecture of the iAPX 286 in this mode is identical to that of the 8086 and other processors in the iAPX 86 family. The principal features of this baseline architecture have already been discussed throughout Part I (Chapters 2 through 4) of this manual. This chapter discusses certain additional topics—addressing, interrupt handling, and

system initialization—that complete the system programmer’s view of the iAPX 286 in Real Address Mode.

5.1 ADDRESSING AND SEGMENTATION

Like other processors in the iAPX 86 family, the iAPX 286 provides a one-megabyte memory space (2^{20} bytes) when operated in Real Address Mode. Physical addresses are the 20-bit values that uniquely identify each byte location in this address space. Physical addresses, therefore, may range from 0 through FFFFFH.

An address is specified by a 32-bit pointer containing two components: (1) a 16-bit effective address offset that determines the displacement, in bytes, of a particular location within a segment; and (2) a 16-bit segment selector component that determines the starting address of the segment. Both components of an address may be referenced explicitly by an instruction (such as JMP, LES, LDS, or CALL); more often, however, the segment selector is simply the contents of a segment register.

The interpretation of the first component, the effective address offset, is straight-forward. Segments are at most 64K (2^{16}) bytes in length, so an unsigned 16-bit quantity is sufficient to address any arbitrary byte location within a segment. The lowest-addressed byte within a segment has an offset of 0, and the highest-addressed byte has an offset of FFFFH. Data operands must be completely contained within a segment and must be contiguous. (These rules apply in both modes.)

A segment selector is the second component of a logical address. This 16-bit quantity specifies the starting address of a segment within a physical address space of 2^{20} bytes.

REAL ADDRESS MODE

Whenever the iAPX 286 accesses memory in Real Address Mode, it generates a 20-bit physical address from a segment selector and offset value. The segment selector value is left-shifted four bit positions to form the segment base address. The offset is extended with 4 high order zeroes and added to the base to form the physical address (see figure 5-1).

Therefore, every segment is required to start at a byte address that is evenly divisible by 16; thus, each segment is positioned at a 20-bit physical address whose least significant four bits are zeroes. This arrangement allows the iAPX 286 to interpret a segment

selector as the high-order 16 bits of a 20-bit segment base address.

No limit or access checks are performed by the iAPX 286 in the Real Address Mode. All segments are readable, writable, executable, and have a limit of 0FFFFH (65535 bytes). To save physical memory, you can use unused portions of a segment as another segment by overlapping the two (see figure 5-2). The Intel iAPX 86 software development tools support this feature via the segment override and group operators. *However, programs that access segment B from segment A become incompatible in the protected virtual address mode.*

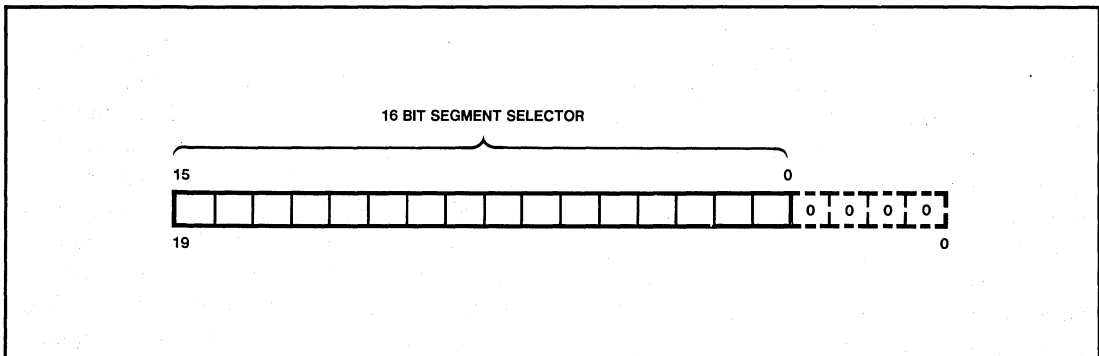


Figure 5-1a. Forming the Segment Base Address

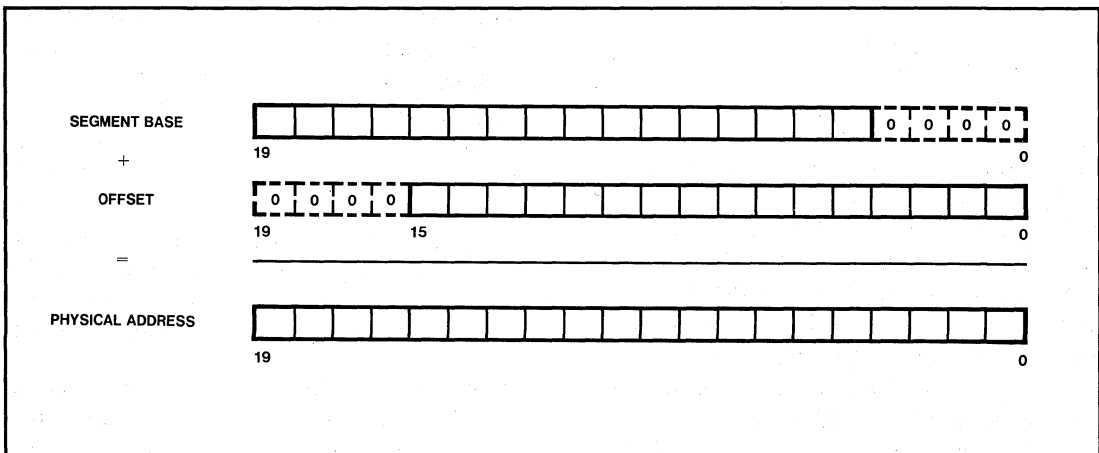


Figure 5-1b. Forming the 20-Bit Physical Address in the Real Address Mode

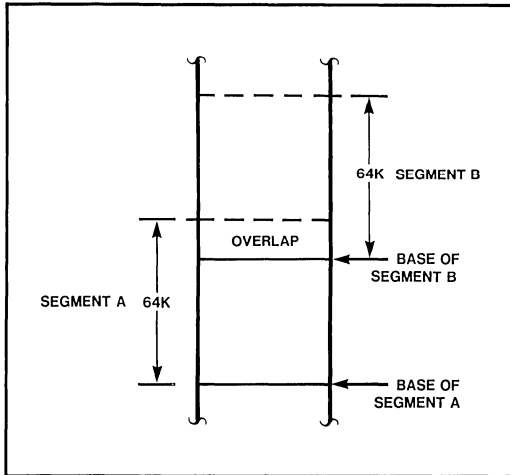


Figure 5-2. Overlapping Segments to Save Physical Memory

5.2 INTERRUPT HANDLING

Program interrupts may be generated in either of two distinct ways. An *internal* interrupt is caused directly by the currently executing program. The execution of a particular instruction results in the occurrence of an interrupt, whether intentionally (e.g., an INT n instruction) or as an unanticipated exception (e.g., invalid opcode). On the other hand, an *external* interrupt occurs asynchronously as the result of an event external to the processor, and bears no necessary relationship with the currently executing program. The INTR and NMI pins of the iAPX 286 provide the means by which external hardware signals the occurrence of such events.

5.2.1 Interrupt Vector Table

Whatever its origin, whether internal or external, an interrupt demands immediate attention from an associated service routine. Control must be transferred, at least for the moment, from the currently executing program to the appropriate interrupt service routine. By means of interrupt vectors, the iAPX 286 handles such control transfers uniformly for both kinds of interrupts.

An interrupt vector is an unsigned integer in the range of 0-255; every interrupt is assigned such a vector. In some cases, the assignment is predetermined and fixed: for example, an external NMI interrupt is invariably associated with vector 2, while an internal divide exception is always associated with vector 0. In most cases, however, the association of an interrupt and a vector is established dynamically. An external INTR interrupt, for example, supplies a vector in response to an interrupt acknowledge bus cycle, while the INT n instruction supplies a vector incorporated within the instruction itself. The vector is shifted two places left to form a byte address into the table (see figure 5-3).

In any case, the iAPX 286 uses the interrupt vector as an index into a table in order to determine the address of the corresponding interrupt service routine. For Real Address Mode, this table is known as the Interrupt Vector Table. Its format is illustrated in figure 5-3.

The Interrupt Vector Table consists of as many as 256 consecutive entries, each four bytes long. Each entry defines the address of a service routine to be associated with the correspondingly numbered interrupt vector code. Within each entry, an address is specified by a full 32-bit pointer that consists of a 16-bit offset and a 16-bit segment selector. Interrupts 0-31 are reserved by Intel.

In Real Address Mode, the interrupt table can be accessed directly at physical memory location 0 through 1023. In the protected virtual address mode, however, the interrupt vector table has no fixed physical address and cannot be directly accessed. Therefore, *Real Address mode programs that directly manipulate the interrupt vector table will not work in the protected virtual address mode.*

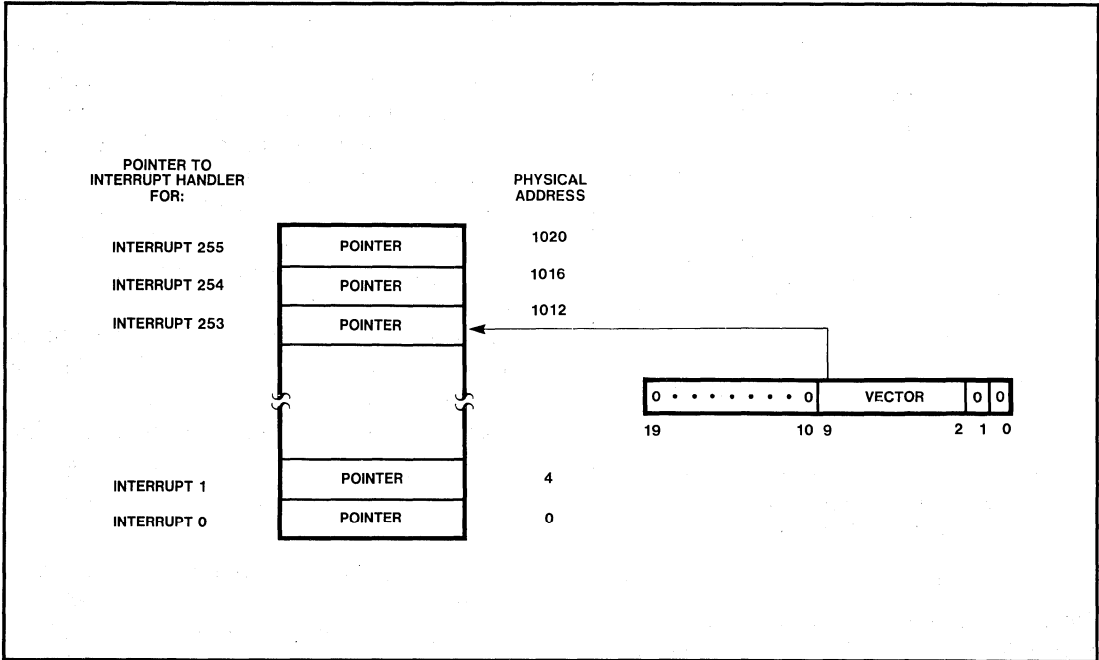


Figure 5-3. Interrupt Vector Table for Real Address Mode

5.2.1.1 INTERRUPT PRIORITIES

When simultaneous interrupt requests occur, they are processed in a fixed order as shown in table 5-1. Interrupt processing involves saving the flags, the return address, and setting CS:IP to point at the first instruction of the interrupt handler. If other interrupts remain enabled, they are processed before the first instruction of the current interrupt handler is executed. The last interrupt processed is therefore the first one serviced.

Table 5-1. Interrupt Processing Order

| Order | Interrupt |
|-------|-------------------------------------|
| 1. | Instruction exception |
| 2. | Single step |
| 3. | NMI |
| 4. | Processor extension segment overrun |
| 5. | INTR |

5.2.2 Interrupt Procedures

When an interrupt occurs in Real Address Mode, the iAPX 86 performs the following sequence of steps. First, the FLAGS register, as well as the old values of CS and IP, are pushed onto the stack (see figure 5-4). The IF and TF flag bits are cleared. The vector number is then used to read the address of the interrupt service routine from the interrupt table. Execution begins at this address.

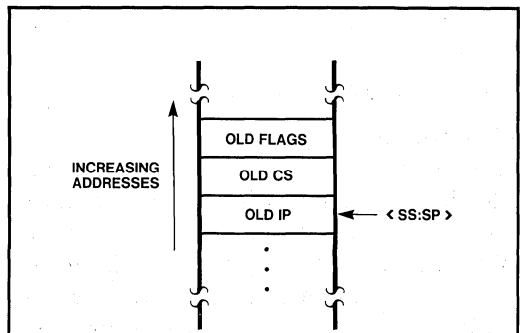


Figure 5-4. Stack Structure After Interrupt (Real Address Mode)

Thus, when control is passed to an interrupt service routine, the return linkage is placed on the stack, interrupts are disabled, and single-step trace (if in effect) is turned off. The IRET instruction at the end of the interrupt service routine will reverse these steps before transferring control to the program that was interrupted.

An interrupt service routine may affect registers other than other IP, CS, and FLAGS. It is the responsibility of an interrupt routine to save additional context information before proceeding so that the state of the machine can be restored upon completion of the interrupt service routine (PUSHA and POPA instructions are intended for these operations). Finally, execution of the IRET instruction pops the old IP, CS, and FLAGS from the stack and resumes the execution of the interrupted program.

5.2.3 Reserved and Dedicated Interrupt Vectors

In general, the system designer is free to use almost any interrupt vectors for any given purpose. Some of the lowest-numbered vectors, however, are reserved by Intel for dedicated functions; their use is specifically implied by certain types of exceptions. None of the first 32 vectors should be defined by the user; these vectors are either invoked by pre-defined exceptions or reserved by Intel for future expansion. Table 5-2 shows the dedicated and reserved vectors of the iAPX 286 in Real Address Mode.

The purpose and function of the dedicated interrupt vectors may be summarized as follows (the saved value of CS:IP will include *all* leading prefixes):

- *Divide error (Interrupt 0)*. This exception will occur if the quotient is too large or an attempt is made to divide by zero using either the DIV or IDIV instruction. The saved CS:IP points at the first byte of the failing instruction. DX and AX are unchanged.
- *Single-Step (Interrupt 1)*. This interrupt will occur after each instruction if the Trap Flag (TF) bit of the FLAGS register is set. Of course, TF is cleared upon entry to this or any other interrupt to prevent infinite recursion. The saved value of CS:IP will point to the next instruction.
- *Nonmaskable (Interrupt 2)*. This interrupt will occur upon receipt of an external signal on the NMI pin. Typically, the nonmaskable interrupt is used to implement power-fail/auto-restart procedures. The saved value of CS:IP will point to the first byte of the interrupted instruction.
- *Breakpoint (Interrupt 3)*. Execution of the one-byte breakpoint instruction causes this interrupt to occur. This instruction is useful for the implementation of software debuggers since it requires only one code byte and can be substituted for any instruction opcode byte. The saved value of CS:IP will point to the next instruction.
- *INTO Detected Overflow (Interrupt 4)*. Execution of the INTO conditional software interrupt instruction will cause this interrupt to occur if the overflow bit (OF) of the FLAGS register is set. The saved value of CS:IP will point to the next instruction.
- *BOUND Range Exceeded (Interrupt 5)*. Execution of the BOUND instruction will cause this interrupt to occur if the specified array index is found to be invalid with respect to the given array bounds. The saved value of CS:IP will point to the first byte of the BOUND instruction.

REAL ADDRESS MODE

Table 5-2. Dedicated and Reserved Interrupt Vectors in Real Address Mode

| Function | Interrupt Number | Related Instructions | Return Address Before Instruction Causing Exception? |
|---|------------------|---|--|
| Divide error exception | 0 | DIV, IDIV | Yes |
| Single step interrupt | 1 | All | N/A |
| NMI interrupt | 2 | All | N/A |
| Breakpoint interrupt | 3 | INT | N/A |
| INTO detected overflow exception | 4 | INTO | No |
| BOUND range exceeded exception | 5 | BOUND | Yes |
| Invalid opcode exception | 6 | Any undefined opcode | Yes |
| Processor extension not available exception | 7 | ESC or WAIT | Yes |
| Interrupt table limit too small | 8 | LIDT | Yes |
| Processor extension segment overrun interrupt | 9 | ESC | Yes |
| Segment overrun exception | 13 | Any memory reference instruction that attempts to reference 16-bit word at offset 0FFFFH. | Yes |
| Reserved | 10-12, 14, 15 | | |
| Processor extension error interrupt | 16 | ESC or WAIT | N/A |
| Reserved | 17-31 | | |
| User defined | 32-255 | | |

N/A = Not Applicable

- *Invalid Opcode (Interrupt 6)*. This exception will occur if execution of an invalid opcode is attempted. (In Real Address Mode, most of the Protected Virtual Address Mode instructions are classified as invalid and should not be used). This interrupt can also occur if the effective address given by certain instructions, notably BOUND, LDS, LES, and LIDT, specifies a register

rather than a memory location. The saved value of CS:IP will point to the first byte of the invalid instruction or opcode.

- *Processor Extension Not Available (Interrupt 7)*. Execution of the ESC instruction will cause this interrupt to occur if the status bits of the MSW indicate that processor extension functions are to be emulated in software. Refer to section 10.2.2 for more details.

The saved value of CS:IP will point to the first byte of the ESC or the WAIT instruction.

- *Interrupt Table Limit Too Small (Interrupt 8).* This interrupt will occur if the limit of the interrupt vector table was changed from 3FFH by the LIDT instruction and an interrupt whose vector is outside the limit occurs. The saved value of CS:IP will point to the first byte of the instruction that caused the interrupt or that was ready to execute before an external interrupt occurred. No error code is pushed.
- *Processor Extension Segment Overrun Interrupt (Interrupt 9).* The interrupt will occur if a processor extension memory operand does not fit in a segment. The saved CS:IP will point at the first byte of the instruction that caused the interrupt.
- *Segment Overrun Exception (Interrupt 13).* This interrupt will occur if a memory operand does not fit in a segment. In Real Mode the only time when this will occur is when a word operand begins at segment offset 0FFFFH. The saved CS:IP will point at the first byte of the instruction that caused the interrupt. No error code is pushed.
- *Processor Extension Error (Interrupt 16).* This interrupt occurs after the numeric instruction that caused the error. It can only occur while executing a subsequent WAIT or ESC. The saved value of CS:IP will point to the first byte of the ESC or the WAIT instruction. The address of the failed numeric instruction is saved in the NPX.

5.3 SYSTEM INITIALIZATION

The iAPX 286 provides an orderly way to start or restart an executing system. Upon receipt of the RESET signal, certain proces-

Table 5-3. Processor State After RESET

| Register | Contents |
|----------|----------|
| FLAGS | 0002 |
| MSW | FFF0 |
| IP | FFF0 |
| CS | F000 |
| DS | 0000 |
| SS | 0000 |
| ES | 0000 |

sor registers go into the determinate state shown in table 5-3.

Since the CS register contains F000 (thus specifying a code segment starting at physical address F0000) and the instruction pointer contains FFF0, the processor will execute its first instruction at physical address FFFF0H. The uppermost 16 bytes of physical memory are therefore reserved for initial startup logic. Ordinarily, this location contains an intersegment direct JMP instruction whose target is the actual beginning of a system initialization or restart program.

Some of the steps normally performed by a system initialization routine are as follows:

- Allocate a stack.
- Load programs and data from secondary storage into memory.
- Initialize external devices.
- Enable interrupts (i.e., set the IF bit of the FLAGS register). Set any other desired FLAGS bit as well.
- Set the appropriate MSW flags if a processor extension is present, or if processor extension functions are to be emulated by software.
- Set other registers, as appropriate, to the desired initial values.
- Execute. (Ordinarily, this last step is performed as an intersegment JMP to the main system program.)



*Memory Management And
Virtual Addressing*

6



CHAPTER 6

MEMORY MANAGEMENT AND VIRTUAL ADDRESSING

In Protected Virtual Address Mode, the iAPX 286 provides an advanced architecture that retains substantial compatibility with the 8086 and other processors in the iAPX 86 family. In many respects, the baseline architecture of the processor remains constant regardless of the mode of operation. Application programmers continue to use the same set of instructions, addressing modes, and data types in Protected Mode as in Real Address Mode.

The major difference between the two modes of operation is that the Protected Mode provides system programmers with additional architectural features, supplementary to the baseline architecture, that can be used to good advantage in the design and implementation of advanced systems. Especially noteworthy are the mechanisms provided for memory management, protection, and multitasking.

This chapter focuses on the memory management mechanisms of Protected Mode; the concept of a virtual address and the process of virtual-to-physical address translation are described in detail in this chapter. Subsequent chapters deal with other key aspects of Protected Mode operation. Chapter 7 discusses the issue of protection and the integrated mechanisms that support a system-wide protection policy. Chapter 8 discusses the notion of a task and its central role in the iAPX 286 architecture. Chapters 9 through 11 discuss certain additional topics—interrupt handling, special instructions, system initialization, etc.—that complete the system programmer's view of iAPX 286 Protected Mode.

6.1 MEMORY MANAGEMENT OVERVIEW

A memory management scheme interposes a mapping operation between logical addresses

(i.e., addresses as they are viewed by programs) and physical addresses (i.e., actual addresses in real memory). Since the logical address spaces are independent of physical memory (dynamically relocatable), the mapping (the assignment of real address space to virtual address space) is transparent to software. This allows the program development tools (for static systems) or the system software (for reprogrammable systems) to control the allocation of space in real memory without regard to the specifics of individual programs.

Application programs may be translated and loaded independently since they deal strictly with virtual addresses. Any program can be relocated to use any available segments of physical memory.

The iAPX 286, when operated in Protected Mode, provides an efficient on-chip memory management architecture. Moreover, as described in Chapter 11, the iAPX 286 also supports the implementation of virtual memory systems—that is, systems that dynamically swap chunks of code and data between real memory and secondary storage devices (e.g., a disk) independent of and transparent to the executing application programs. Thus, a program-visible address is more aptly termed a virtual address rather than a logical address since it may actually refer to a location not currently present in real memory.

Memory management, then, consists of a mechanism for mapping the virtual addresses that are visible to the program onto the physical addresses of real memory. With the iAPX 286, segmentation is the key to virtual memory addressing. Virtual memory is parti-

tioned into a number of individual segments, which are the units of memory that are mapped into physical memory and swapped to and from secondary storage devices. Most of this chapter is devoted to a detailed discussion of the mapping and virtual memory mechanisms of the iAPX 286.

The concept of a task also plays a significant role in memory management since distinct memory mappings may be assigned to the different tasks in a multitask or multi-user environment. A complete discussion of tasks is deferred until Chapter 8, "Tasks and State Transition." For present purposes, it is sufficient to think of a task as an ongoing process, or execution path, that is dedicated to a particular function. In a multi-user time-sharing environment, for example, the processing required to interact with a particular user may be considered as a single task, functionally independent of the other tasks (i.e., users) in the system.

6.2 VIRTUAL ADDRESSES

In Protected Mode, application programs deal exclusively with virtual addresses; programs have no access whatsoever to the actual physical addresses generated by the processor. As discussed in Chapter 2, an address is specified by a program in terms of two components: (1) a 16-bit effective address offset that determines the displacement, in bytes, of a location within a segment; and (2) a 16-bit segment selector that uniquely references a particular segment. Jointly, these two components constitute a complete 32-bit address (pointer data type), as shown in figure 6-1.

These 32-bit virtual addresses are manipulated by programs in exactly the same way as the two-component addresses of Real Address Mode. After a program loads the segment selector component of an address into a

segment register, each subsequent reference to locations within the selected segment requires only a 16-bit offset be specified. Locality of reference will ordinarily insure that addresses can be specified very efficiently using only 16-bit offsets.

An important difference between Real Address Mode and Protected Mode, however, concerns the actual format and information content of segment selectors. In Real Address Mode, as with the 8086 and other processors in the iAPX 86 family, a 16-bit selector is merely the upper bits of a segment's physical base address. By contrast, segment selectors in Protected Mode follow an entirely different format, as illustrated by figure 6-1.

Two of the selector bits, designated as the RPL field in figure 6-1, are not actually involved in the selection and specification of segments; their use is discussed in Chapter 7.

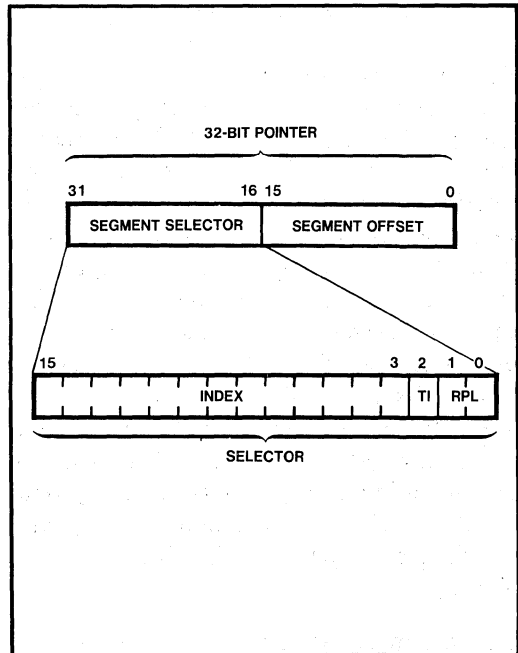


Figure 6-1. Format of the Segment Selector Component

The remaining 14 bits of the selector component uniquely designate a particular segment. The virtual address space of a program, therefore, may encompass as many as 16,384 (2^{14}) distinct segments. Segments themselves are of variable size, ranging from as small as a single byte to as large as 64K (2^{16}) bytes. Thus, a program's virtual address space may contain, altogether, up to a full gigabyte ($2^{30} = 2^{14} \times 2^{16}$) of individually addressable byte locations.

The entirety of a program's virtual address space is further subdivided into two separate halves, as distinguished by the TI ("table indicator") bit in the virtual address. These two halves are the global address space and the local address space.

The global address space is used for system-wide data and procedures including operating system software, library routines, runtime language support and other commonly shared

system services. (To application programs, the operating system appears to be a set of service routines that are accessible to all tasks.) Global space is shared by all tasks to avoid unnecessary replication of system service routines and to facilitate shared data and interrupt handling. Global address space is defined by addresses with a zero in the TI bit position; it is identically mapped for all tasks in the system.

The other half of the virtual address space—comprising those addresses with the TI bit set—is separately mapped for each task in the system. Because such an address space is local to the task for which it is defined, it is referred to as a local address space. In general, code and data segments within a task's local address space are private to that particular task or user. Figure 6-2 illustrates the task isolation made possible by partitioning the virtual address spaces into local and global regions.

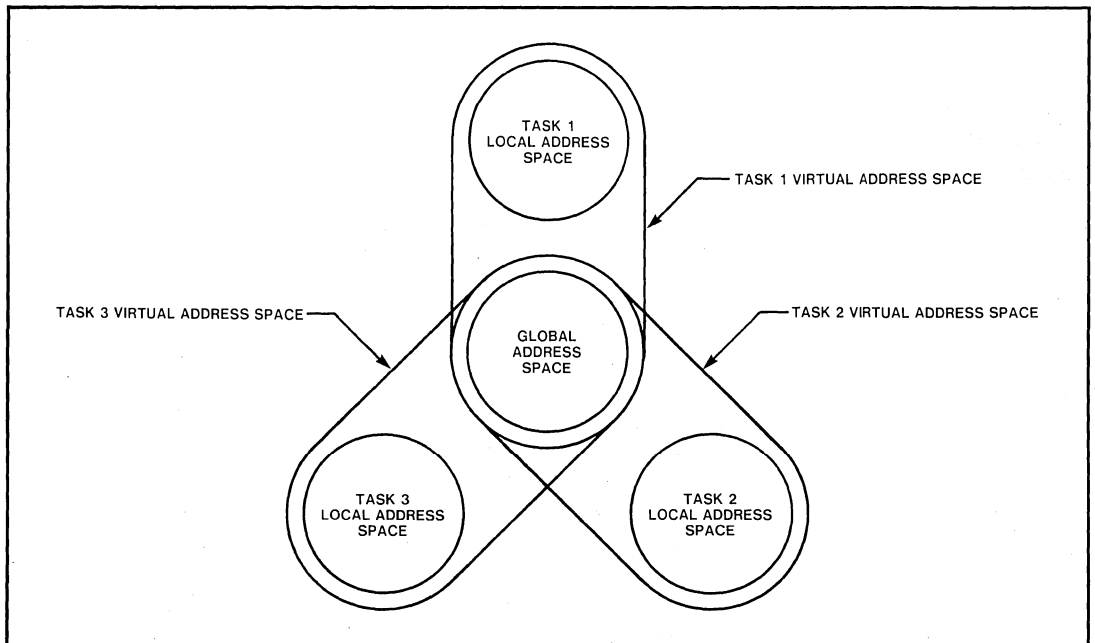


Figure 6-2. Address Spaces and Task Isolation

Within each of the two regions addressable by a program—either the global address space or a particular local address space—as many as 8,192 (2^{13}) distinct segments may be defined. The INDEX field of the segment selector allows for a unique specification of each of these segments. This 13-bit quantity acts as an index into a memory-resident table, called a descriptor table, that records the mapping between segment address and the physical locations allocated to each distinct segment. (These descriptor tables, and their role in virtual-to-physical address translation, are described in the sections that follow.)

In summary, a Protected Mode virtual address is a 32-bit pointer to a particular byte location within a one-gigabyte virtual address space. Each such pointer consists of a 16-bit selector component and a 16-bit offset component. The selector component, in turn, comprises a 13-bit table index, a 1-bit table indicator (local versus global), and a 2-bit RPL field; all but this last field serve to select a particular segment from among the 16K segments in a task's virtual address space. The offset component of a full pointer is an unsigned 16-bit integer that specifies the desired byte location within the selected segment.

6.3 DESCRIPTOR TABLES

A descriptor table is a memory-resident table either defined by program development tools in a static system or controlled by operating system software in systems that are reprogrammable. The descriptor table contents govern the interpretation of virtual addresses. Whenever the iAPX 286 decodes a virtual address, translating a full 32-bit pointer into a corresponding 24-bit physical address, it implicitly references one of these tables.

Within a Protected Mode system, there are ordinarily several descriptor tables resident in

memory. One of these is the global descriptor table (GDT); this table provides a complete description of the global address space. In addition, there may be one or more local descriptor tables (LDTs), each describing the local address space of one or more tasks.

For each task in the system, a pair of descriptor tables—consisting of the GDT (shared by all tasks) and a particular LDT (private to the task or to a group of closely related tasks)—provides a complete description of that task's virtual address space. The protection mechanism described in Chapter 7, "Protection," ensures that a task is granted access only to its own virtual address space. In the simplest of system configurations, tasks can reside entirely within the GDT without the use of local descriptor tables. This will simplify system software by only requiring maintenance of one table (the GDT) at the expense of no isolation between tasks. The point is: the iAPX 286 memory management scheme is flexible enough to accommodate a variety of implementations and does not require use of all possible facilities when implementing a system.

The descriptor tables consist of a sequence of 8-byte entries called descriptors. A descriptor table may contain from 1 to 8192 entries.

Within a descriptor table, two main classes of descriptors are recognized by the iAPX 286 architecture. The most important of these, from the standpoint of memory management, are called segment descriptors; these determine the set of segments that are included within a given address space. The other class are special-purpose control descriptors—such as call gates and task descriptors—to implement protection (described in succeeding chapters) and special system data segments.

Figure 6-3 shows the format of a segment descriptor. Note that it provides information about the physical-memory base address and size of a segment, as well as certain access information. If a particular segment is to be included within a virtual address space, then a segment descriptor that describes that segment must be included within the appropriate descriptor table. Thus, within the GDT, there are segment descriptors for all of the segments that comprise a system's global address space. Similarly, within a task's LDT, there must be a descriptor for each of the segments that are to be included in that task's local address space.

Each local descriptor table is itself a special system segment, recognizable as such by the iAPX 286 architecture and described by a specific type of segment descriptor (see figure 6-4). Because there is only a single GDT segment, it is not defined by a segment descriptor. Its base and size information is maintained in a dedicated register, GDTR, as described below (section 6.6.2).

Similarly, there is another dedicated register within the iAPX 286, LDTR, that records the base and size of the current LDT segment (i.e., the LDT associated with the currently executing task). The LDTR register state, however, is volatile: its contents are automatically altered whenever a task switch is made from one task to another. An alternate specification independent of changeable register contents must therefore exist for each LDT in the system. This independent specification is accomplished by means of special system segment descriptors known as descriptor table descriptors or LDT descriptors.

Figure 6-4 shows the format of a descriptor table descriptor. (Note that it is distinguished from an ordinary segment descriptor by the contents of certain bits in the access byte.)

This special type of descriptor is used to specify the physical base address and size of a local descriptor table that defines the virtual address space and address mapping for an individual user or task (figure 6-5).

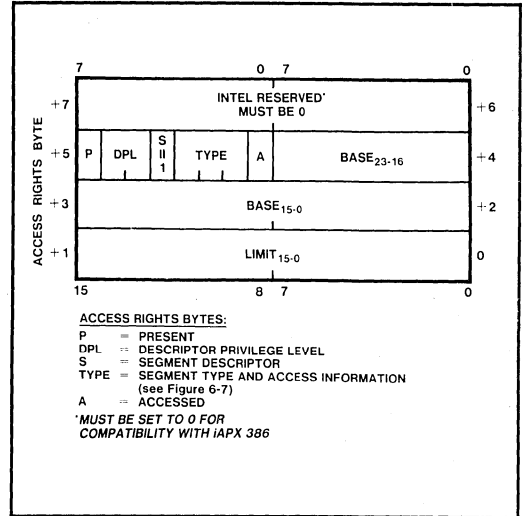


Figure 6-3. Segment Descriptor (S = 1)

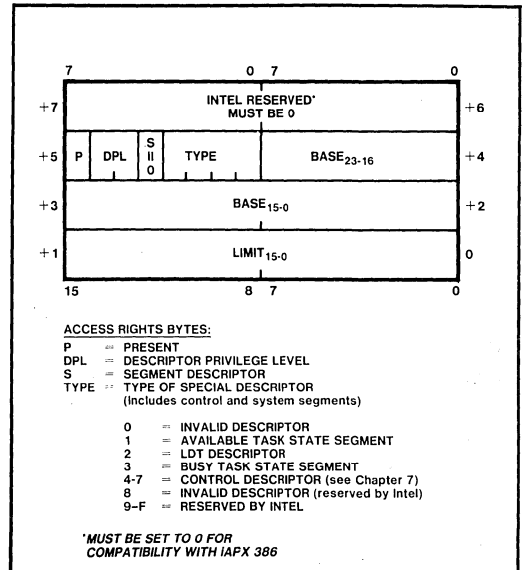


Figure 6-4. Special Purpose Descriptors or System Segment Descriptors (S = 0)

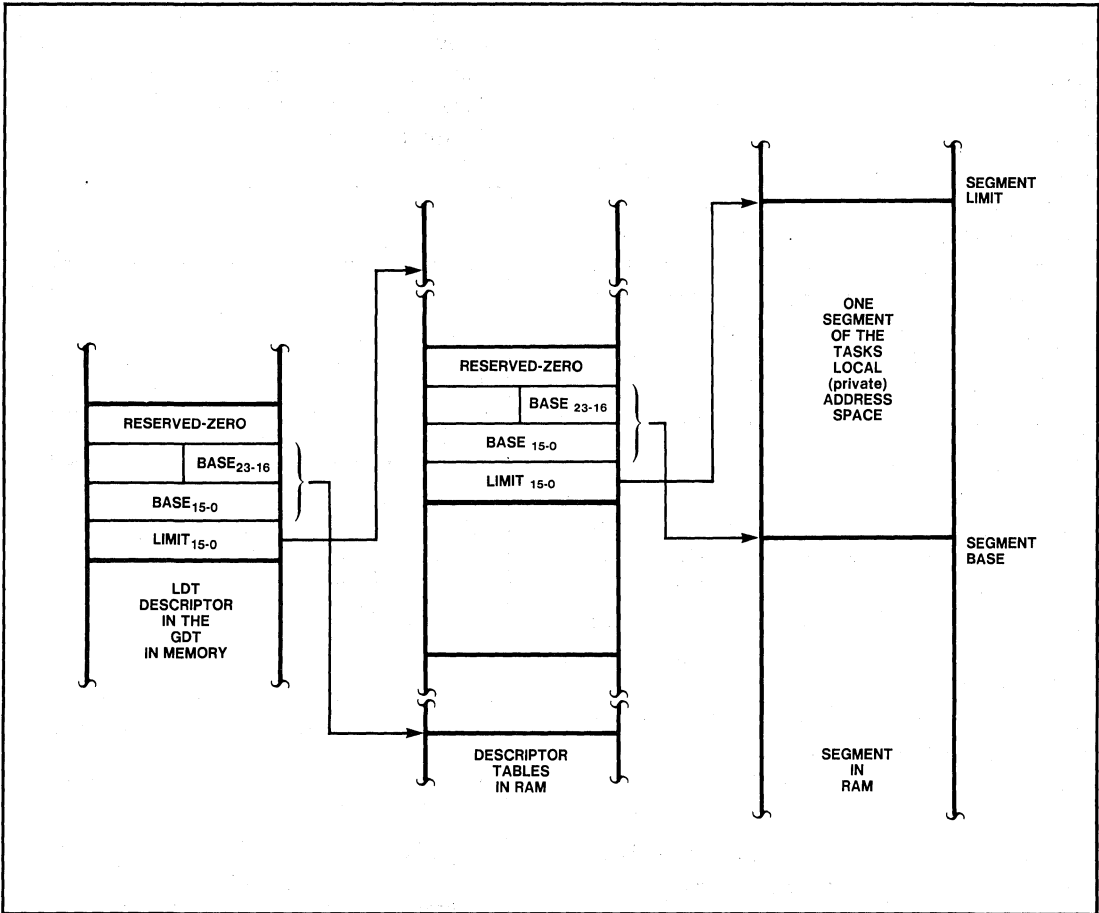


Figure 6-5. LDT Descriptor

Each LDT segment in a system must lie within that system's global address space. Thus, all of the descriptor table descriptors must be included among the entries in the global descriptor table (the GDT) of a system. In fact, these special descriptors may appear only in the GDT. Reference to an LDT descriptor within an LDT will cause a protection violation. Even though they are in the global address space available to all tasks, the descriptor table descriptors are protected from corruption within the GDT since they are special system segments and can only be accessed for loading into the LDTR register.

6.4 VIRTUAL-TO-PHYSICAL ADDRESS TRANSLATION

The translation of a full 32-bit virtual address pointer into a real 24-bit physical address is shown by figure 6-6. When the segment's base address is determined as a result of the mapping process, the offset value is added to the result to obtain the physical address.

The actual mapping is performed on the selector component of the virtual address. The 16-bit segment selector is mapped to a 24-bit segment base address via a segment descriptor maintained in one of the descriptor tables.

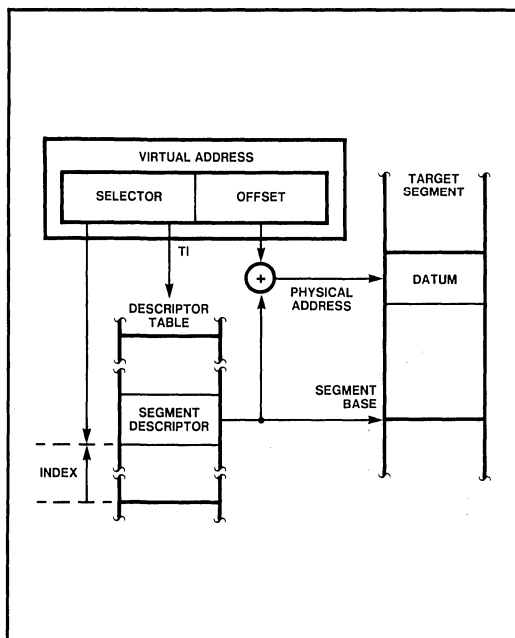


Figure 6-6. Virtual-to-Physical Address Translation

The TI bit in the segment selector (see figure 6-1) determines which of two descriptor tables, either the GDT or the current LDT, is to be chosen for memory mapping. In either case, using the GDTR or LDTR register, the processor can readily determine the physical base address of the memory-resident table.

The INDEX field in the segment selector specifies a particular descriptor entry within the chosen table. The processor simply multiplies this index value by 8 (the length of a descriptor), and adds the result to the base address of the descriptor table in order to access the appropriate segment descriptor in the table.

Finally, the segment descriptor contains the physical base address of the target segment, as well as size (limit) and access information. The processor sums the 24-bit segment base and the specified 16-bit offset to generate the resulting 24-bit physical address.

6.5 SEGMENTS AND SEGMENT DESCRIPTORS

Segments are the basic units of iAPX 286 memory management. In contrast to schemes based on fixed-size pages, segmentation allows for a very efficient implementation of software: variable-length segments can be tailored to the exact requirements of an application. Segmentation, moreover, is consistent with the way a programmer naturally deals with his virtual address space: programmers are encouraged to divide code and data into clearly defined modules and structures which are manipulated as consistent entities. This reduces (minimizes) the potential for virtual memory thrashing. Segmentation also eliminates the restrictions on data structures that span a page (e.g., a word that crosses page boundaries).

Each segment within an iAPX 286 system is defined by an associated segment descriptor, which may appear in one or more descriptor tables. Its inclusion within a descriptor table represents the presence of its associated segment within the virtual address space defined by that table. Conversely, its omission from a descriptor table means that the segment is absent from the corresponding address space.

As shown previously in figure 6-3, an 8-byte segment descriptor encodes the following information about a particular segment:

- **Size.** This 16-bit field, comprising bytes 0 and 1 of a segment descriptor, specifies an unsigned integer as the size, in bytes (from 1 byte to 64K bytes), of the segment.

Unlike segments in the 8086 (or the iAPX 286 in Real Address Mode)—which are never explicitly limited to less than a full 64K bytes—Protected Mode segments are always assigned a specific size value. In conjunction with the protection features described in Chapter

7, this assigned size allows the enforcement of a very desirable and natural rule: inadvertent accesses to locations beyond a segment's actual boundaries are prohibited.

- **Base.** This 24-bit field, comprising bytes 2 through 4 of a segment descriptor, specifies the physical base address of the segment; it thus defines the actual location of the segment within the 16-megabyte real memory space. The base may be any byte address within the 16-megabyte real memory space.
- **Access.** This 8-bit field comprises byte 5 of a segment descriptor. This access byte specifies a variety of additional information about a segment, particularly in regard to the protection features of the iAPX 286. For example, code segments are distinguished from data segments; and certain special access restrictions (such as Execute-Only or Read-Only) may be defined for segments of each type. Access byte values of 00H or 80H will always denote "invalid."

Figure 6-7 shows the access byte format for both code and data segment descriptors. Detailed discussion of the protection related fields within an access byte (Conforming, Execute-Only, Descriptor Privilege Level, Expand Down, and Write-Permitted), and their use in implementing protection policies, is deferred to Chapter 7. The two fields Accessed and Present are used for virtual memory implementations.

6.6 MEMORY MANAGEMENT REGISTERS

The Protected Virtual Address Mode features of the iAPX 286 operate at high performance due to extensions to the basic iAPX 86 register set. Figure 6-8 illustrates that portion of the extended register structure that pertains to memory management. (For a complete summary of all Protected Mode registers, refer to section 10.1).

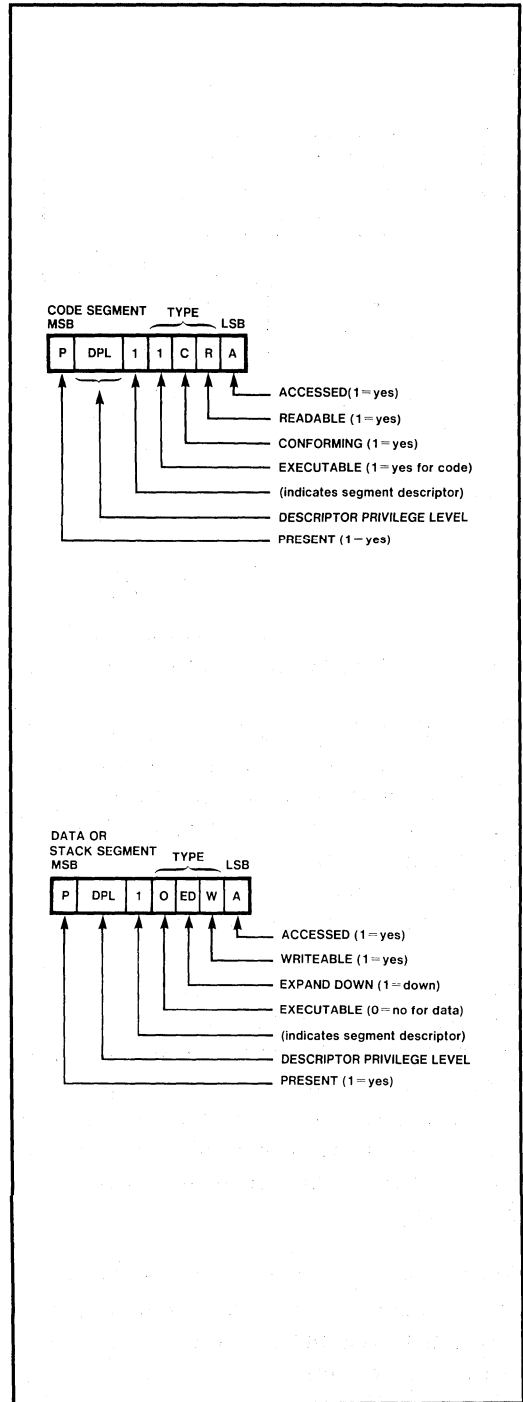


Figure 6-7. Segment Descriptor Access Bytes

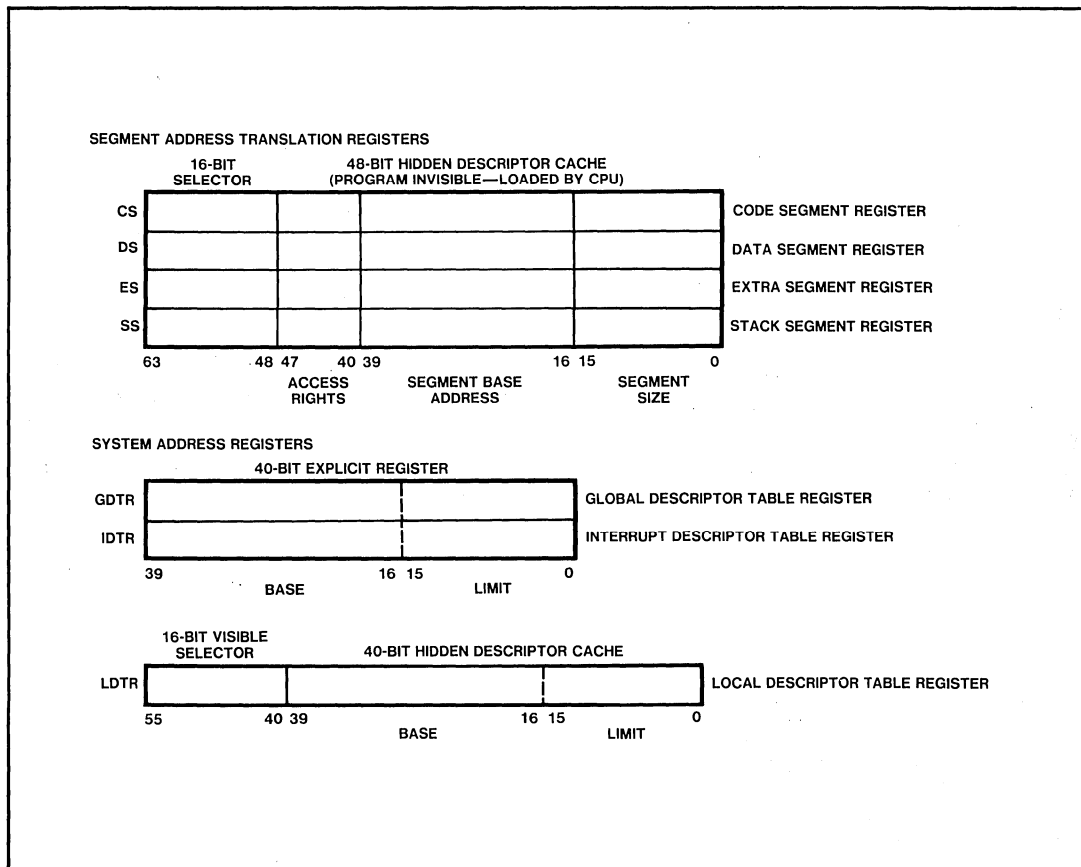


Figure 6-8. Memory Management Registers

6.6.1 Segment Address Translation Registers

Figure 6-8 shows the segment registers CS, DS, ES, and SS. In contrast to their usual representation, however, these registers are now depicted as 64-bit registers, each with “visible” and “hidden” components.

The visible portions of these segment address translation registers are manipulated by programs exactly as if they were simply the 16-bit segment registers of Real Address Mode. By loading a segment selector into one of these registers, the program makes the associated segment one of its four currently addressable segments.

The operations that load these registers—or, more exactly, those that load the visible portion of these registers—are normal program instructions. These instructions may be divided into two categories:

1. Direct segment-register load instructions. These instructions (such as LDS, LES, MOV, POP, etc.) can explicitly reference the SS, DS, or ES segment registers as the destination operand.
2. Implied segment-register load instructions. These instructions (such as inter-segment CALL and JMP) implicitly reference the CS code segment register;

MEMORY MANAGEMENT AND VIRTUAL ADDRESSING

as a result of these operations, the contents of CS are altered.

Using these instructions, a program loads the visible part of the segment register with a 16-bit selector (i.e., the high-order word of a virtual address pointer). Whenever this is done, the processor automatically uses the selector to reference the appropriate descriptor and loads the 48-bit hidden descriptor cache for that segment register.

The correspondence between selectors and descriptors has already been described. Remember that the selector's TI bit indicates one of the two descriptor tables, either the LDT or the GDT. Within the indicated table, a particular entry is chosen by the selector's

13-bit INDEX field. This index, scaled by a factor of 8, represents the relative displacement of the chosen table entry (a descriptor).

Thus, so long as a particular selector value is valid (i.e., it points to a valid segment descriptor within the bounds of the descriptor table), it can be readily associated with an 8-byte descriptor. When a selector value is loaded into the visible part of a segment register, the iAPX 286 automatically loads 6 bytes of the associated descriptor into the hidden part of the register. These 6 bytes, therefore, contain the size, base, and access type of the selected segment. Figure 6-9 illustrates this transparent process of descriptor loading.

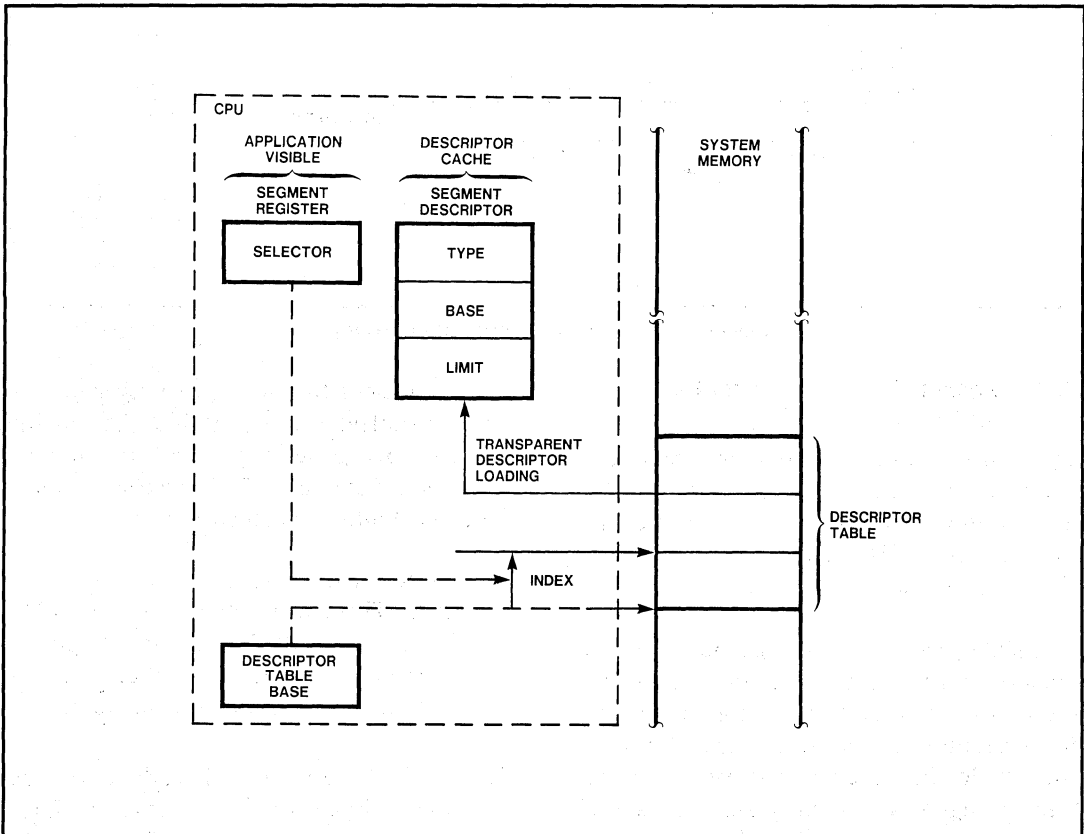


Figure 6-9. Descriptor Loading

In effect, the hidden descriptor fields of the segment registers function as the memory management cache of the iAPX 286. All the information required to address the current working set of segments—that is, the base address, size, and access rights of the currently addressable segments—is stored in this memory cache. Unlike the probabilistic caches of other architectures, however, the iAPX 286 cache is completely deterministic: the caching of descriptors is explicitly controlled by the program.

Most memory references do not require the translation of a full 32-bit virtual address, or long pointer. Operands that are located within one of the currently addressable segments, as determined by the four segment registers, can be referenced very efficiently by means of a short pointer, which is simply a 16-bit offset.

In fact, most iAPX 286 instructions reference memory locations in precisely this way, specifying only a 16-bit offset with respect to one of the currently addressable segments. The choice of segments (CS, DS, ES, or SS) is either implicit within the instruction itself, or explicitly specified by means of a segment-override prefix (as described in Chapter 2).

Thus, in most cases, virtual-to-physical address translation is actually performed in two separate steps. First, when a program loads a new value into a segment register, the processor immediately performs a mapping operation; the physical base address of the selected segment (as well as certain additional information) is automatically loaded into the hidden portion of the register. The internal cache registers (virtual address translation hardware) are therefore dynamically shared among the 16K different segments potentially addressable within the user's virtual address space. No software overhead (either system or application) is required to perform this operation.

Subsequently, as the program utilizes a short pointer to reference a location within a segment, the processor generates a 24-bit physical address simply by adding the specified offset value to the previously cached segment base address. By encouraging the use of short pointers in this way, rather than requiring a full 32-bit virtual address for every memory reference, the iAPX 286 provides a very efficient on-chip mechanism for address translation, with minimum overhead for references to memory-based tables or the need for external address-translation devices.

6.6.2 System Address Registers

The Global Descriptor Table Register (GDTR) is a dedicated 40-bit (5 byte) register used to record the base and size of a system's global descriptor table (GDT). Thus, two of these bytes define the size of the GDT, and three bytes define its base address.

In figure 6-8, the contents of the GDTR are referred to as a "hidden descriptor." The term "descriptor" here emphasizes the analogy with the segment descriptors ordinarily found in descriptor tables. Just as these descriptors specify the base and size (limit) of ordinary segments, the GDTR register specifies these same parameters for that segment of memory serving as the system GDT. The limit prevents accesses to descriptors in the GDT from accessing beyond the end of the GDT and thus provides address space isolation at the system level as well as at the task level.

The register contents are "hidden" only in the sense that they are not accessible by means of ordinary instructions. Instead, the dedicated protected instructions LGDT and SGDT are reserved for loading and storing, respectively, the contents of the GDTR at Protected Mode initialization (refer to section 10.2 for details). Subsequent alteration of the GDT base and size values is not recommended but is a system option at the most

privileged level of software (see section 7.3 for a discussion of privilege levels).

The Local Descriptor Table Register (LDTR) is a dedicated 40-bit register that contains, at any given moment, the base and size of the local descriptor table (LDT) associated with the currently executing task. Unlike GDTR, the LDTR register contains both a “visible” and a “hidden” component. Only the visible component is accessible, while the hidden component remains truly inaccessible even to dedicated instructions.

The visible component of the LDTR is a 16-bit “selector” field. The format of these 16 bits corresponds exactly to that of a segment selector in a virtual address pointer. Thus, it contains a 13-bit INDEX field, a 1-bit TI field, and a 2-bit RPL field. The TI “table indicator” bit must be zero, indicating a reference to the GDT (i.e., to global address space). The INDEX field consequently provides an index to a particular entry within the GDT. This entry, in turn, must be an LDT descriptor (or descriptor table descriptor), as defined in the previous section. In this way, the visible “selector” field of the LDTR, by selecting an LDT descriptor, uniquely designates a particular LDT in the system.

The dedicated, protected instructions LLDT and SLDT are reserved for loading and storing, respectively, the visible selector component of the LDTR register (refer to section 10.2 for details). Whenever a new value is loaded into the visible “selector” portion of LDTR, an LDT descriptor will

have been uniquely chosen (assuming, of course, that the “selector” value is valid). In this case, the iAPX 286 automatically loads the hidden “descriptor” portion of LDTR with five bytes from the chosen LDT descriptor. Thus, size and base information about a particular LDT, as recorded in a memory-resident global descriptor table entry, is cached in the LDTR register.

New values may be loaded into the visible portion of the LDTR (and, thus, into the hidden portion as well) in either of two ways. The LLDT instruction, during system initialization, is used explicitly to set an initial value for the LDTR register; in this way, a local address space is provided for the first task in a multitasking environment. After system startup, explicit changes are not required since operations that automatically invoke a task switch (described in section 8.4) appropriately manage the LDTR.

At all times, the LDTR register thus records the physical base address (and size) of the current task’s LDT; the descriptor table required for mapping the current local address space, therefore, is immediately accessible to the processor. Moreover, since GDTR always maintains the base address of the GDT, the table that maps the global address space is similarly accessible. The two system address registers, GDTR and LDTR, act as a special processor cache, maintaining current information about the two descriptor tables required, at any given time, for addressing the entire current virtual address space.

CHAPTER 7

PROTECTION

7.1 INTRODUCTION

In most microprocessor based products, the product's availability, quality, and reliability are determined by the software it contains. Software is often the key to a product's success. Protection is a tool used to shorten software development time, and improve software quality and reliability.

Program testing is an important step in developing software. A system with protection will detect software errors more quickly and accurately than a system without protection. Eliminating errors via protection reduces the development time for a product.

Testing software is difficult. Many errors occur only under complex circumstances which are difficult to anticipate. The result is that products are shipped with undetected errors. When such errors occur, products appear unreliable. The impact of a software error is multiplied if it introduces errors in other bug-free programs. Thus, the total system reliability reduces to that of the least reliable program running at any given time.

Protection improves the reliability of an entire system by preventing software errors in one program from affecting other programs. Protection can keep the system running even when some user program attempts an invalid or prohibited operation.

Hardware protection performs run-time checks in parallel with the execution of the program. But, hardware protection has traditionally resulted in a design that is more expensive and slower than a system without protection. However, the iAPX 286 provides hardware-enforced protection without the performance or cost penalties normally associated with protection.

The protected mode iAPX 286 implements extensive protection by integrating these functions on-chip. The iAPX 286 protection is more comprehensive and flexible than comparable solutions. It can locate and isolate a large number of program errors and prevent the propagation of such errors to other tasks or programs. The protection of the total system detects and isolates bugs both during development and installed usage. Chapter 9 discusses exceptions in more detail.

The remaining sections of this chapter explain the protection model implemented in the iAPX 286.

7.1.1 Types of Protection

Protection in the iAPX 286 has three basic aspects:

1. Isolation of system software from user applications.
2. Isolation of users from each other (Inter-task protection).
3. Data-type checking.

The iAPX 286 provides a four-level, ringed-type, increasingly-privileged protection mechanism to isolate applications software from various layers of system software. This is a major improvement and extension over the simpler two-level user/supervisor mechanism found in many systems. Software modules in a supervisor level are protected from modules in the application level and from software in less privileged supervisor levels.

Restricting the addressability of a software module enables an operating system to control system resources and priorities. This is

supports multiple concurrent users. Multi-user, multi-tasking, and distributed processing systems require this complete control of system resources for efficient, reliable operation.

The second aspect of protection is isolating users from each other. Without such isolation an error in one user program could affect the operation of another error-free user program. Such subtle interactions are difficult to diagnose and repair. The reliability of applications programs is greatly enhanced by such isolation of users.

Within a system or application level program, the iAPX 286 will ensure that all code and data segments are properly used (e.g., data cannot be executed, programs cannot be modified, and offset must be within defined limits, etc.). Such checks are performed on every memory access to provide full run-time error checking.

7.1.2 Protection Implementation

The protection hardware of the iAPX 286 establishes constraints on memory and instruction usage. The number of possible interactions between instructions, memory, and I/O devices is practically unlimited. Out of this very large field the protection mechanism limits interactions to a controlled, understandable subset. Within this subset fall the list of "correct" operations. Any operation that does not fall into this subset is not allowed by the protection mechanism and is signalled as a protection violation.

To understand protection on the iAPX 286, you must begin with its basic parts: segments and tasks. iAPX 286 segments are the smallest region of memory which have unique protection attributes. Modular programming automatically produces separate regions of

memory (segments) whose contents are treated as a whole. Segments reflect the natural construction of a program, e.g., code for module A, data for module A, stack for the task, etc. All parts of the segment are treated in the same way by the iAPX 286. Logically separate regions of memory should be in separate segments.

The memory segmentation model (see figure 7-1) of the iAPX 286 was designed to optimally execute code for software composed of independent modules. Modular programs are easier to construct and maintain. Compared to monolithic software systems, modular software systems have enhanced capabilities, and are typically easier to develop and test for proper operation.

Each segment in the system is defined by a memory-resident descriptor. The protection hardware prevents accesses outside the data areas and attempts to modify instructions, etc., as defined by the descriptors. Segmentation on the iAPX 286 allows protection hardware to be integrated into the CPU for full data access control without any performance impact.

The segmented memory architecture of the iAPX 286 provides unique capabilities for regulating the transfer of control between programs.

Programs are given direct but controlled access to other procedures and modules. This capability is the heart of isolating application and system programs. Since this access is provided and controlled directly by the iAPX 286 hardware, there is no performance penalty. A system designer can take advantage of the iAPX 286 access control to design high-performance modular systems with a high degree of confidence in the integrity of the system.

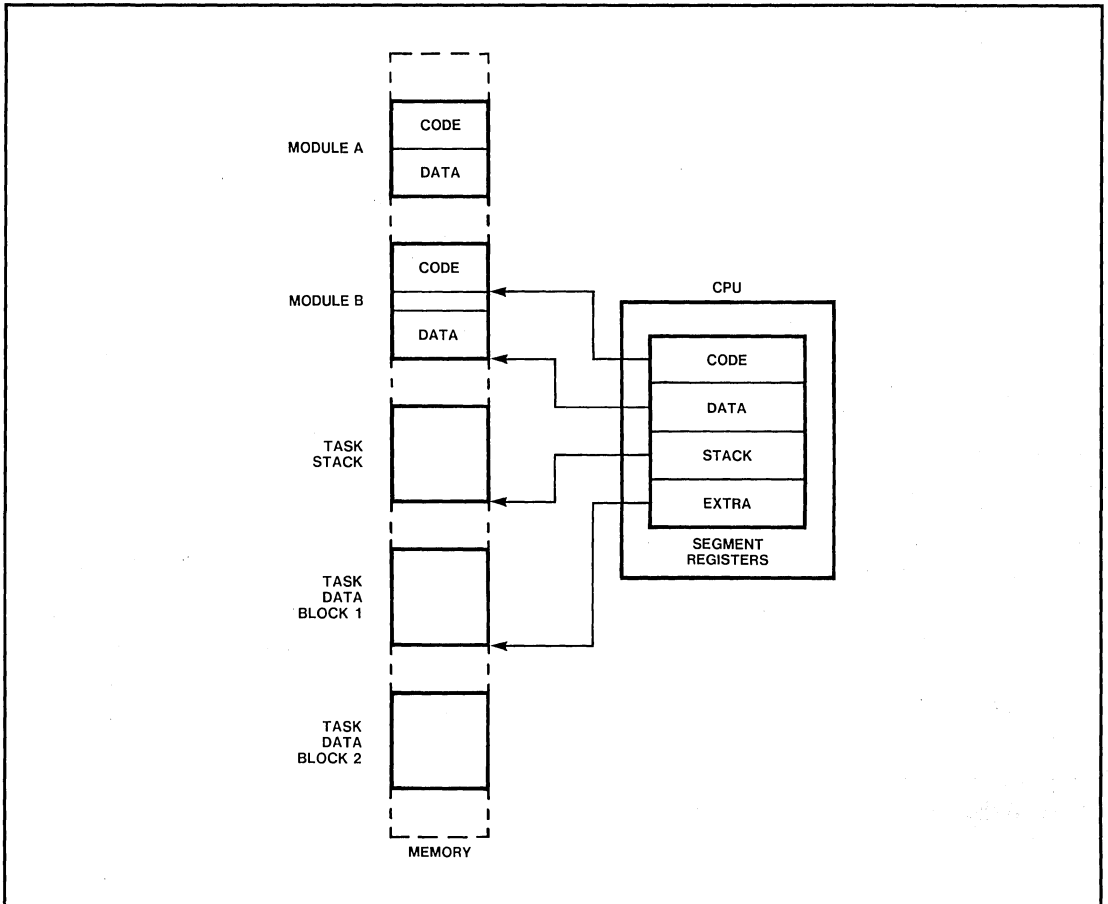


Figure 7-1. Addressing Segments of a Module Within a Task

Access control between programs and the operating system is implemented via address space separation and a privilege mechanism. The address space control separates applications programs from each other while the privilege mechanism isolates system software from applications software. The privilege mechanism grants different capabilities to programs to access code, data, and I/O resources based on the associated protection level. Trusted software that controls the whole system is typically placed at the most privileged level. Ordinary application software does not have to deal with these control

mechanisms. They come into play only when there is a transfer of control between tasks, or if the Operating System routines have to be invoked.

The protection features of multiple privilege levels extend to ensuring reliable I/O control. However, for a system designer to enable only one specific level to do I/O would excessively constrain subsequent extensions or application development. Instead, the iAPX 286 permits each task to be assigned a separate minimum level where I/O is allowed. I/O privilege is discussed in section 10.3.

An important distinction exists between tasks and programs. Programs (e.g., instructions in code segments) are static and consist of a fixed set of code and data segments each with an associated privilege level. The privilege assigned to a program determines what the program may do when executed by a task. Privilege is assigned to a program when the system is built or when the program is loaded.

Tasks are dynamic; they execute one or more programs. Task privilege changes with time according to the privilege level of the program being executed. Each task has a unique set of attributes that define it, e.g., address space, register values, stack, data, etc. A task may execute a program if that program appears in the task's address space. The rules of protection control determine when a program may be executed by a task, and once executed, determine what the program may do.

7.2 MEMORY MANAGEMENT AND PROTECTION

The protection hardware of the iAPX 286 is related to the memory management hardware.

Since protection attributes are assigned to segments, they are stored along with the memory management information in the segment descriptor. The protection information is specified when the segment is created. In addition to privilege levels, the descriptor defines the segment type (e.g., Code segment, Data segment, etc.). Descriptors may be created either by program development tools or by a loader in a dynamically loaded reprogrammable environment.

The protection control information consists of a segment type, its privilege level, and size. These are fields in the access byte of the segment descriptor (see figure 7-2). This information is saved on-chip in the programmer invisible section of the segment register for fast access during execution. These entries are changed only when a segment register is loaded. The protection data is used at two times: upon loading a segment register and upon each reference to the selected segment.

The hardware performs several checks while loading a segment register. These checks

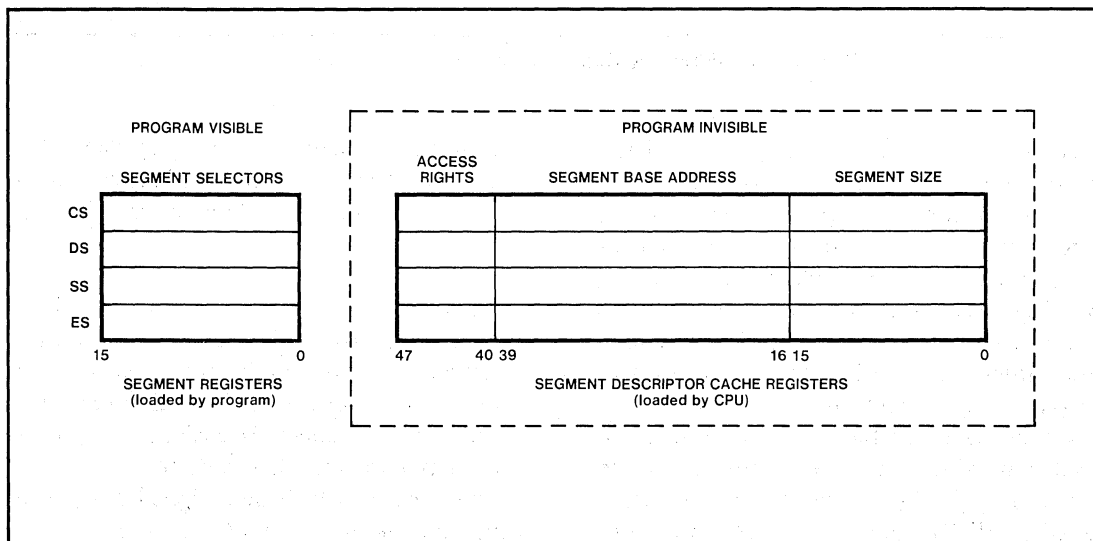


Figure 7-2. Descriptor Cache Registers

enforce the protection rules before any memory reference is generated. The hardware verifies that the selected segment is valid (is identified by a descriptor, is in memory, and is accessible from the privilege level in which the program is executing) and that the type is consistent with the target segment register. For example, you cannot load a read-only segment descriptor into SS because the stack must always be writable.

Each reference into the segment defined by a segment register is checked by the hardware to verify that it is within the defined limits of the segment and is of the proper type. For example, a code segment or read-only data segment cannot be written. All these checks are made before the memory cycle is started; any violation will prevent that cycle from starting and cause an exception to occur. Since the checks are performed concurrently with address formation, there is no performance penalty.

By controlling the access rights and privilege attributes of segments, the system designer can assure a program will not change its code or overwrite data belonging to another task. Such assurances are vital to maintaining system integrity in the face of error-prone programs.

7.2.1 Separation of Address Spaces

As described in Chapter 6, each task can address up to a gigabyte ($2^{14}-2$ segments of up to 65536 bytes each) of virtual memory defined by the task's LDT (Local Descriptor Table) and the system GDT. Up to one-half gigabyte (2^{13} segments of up to 65536 bytes each) of the task's address space is defined by the LDT and represents the task's private address space. The remaining virtual address space is defined by the GDT and is common to all tasks in the system.

Each descriptor table is itself a special kind of segment recognized by the iAPX 286 architecture. These tables are defined by descriptors in the GDT (Global Descriptor Table). The CPU has a set of base and limit registers that point to the GDT and the LDT of the currently running task. The local descriptor table register is loaded by a task switch operation.

An active task can only load selectors that reference segments defined by descriptors in either the GDT or its private LDT. Since a task cannot reference descriptors in other LDTs, and no descriptors in its LDT refer to data or code belonging to other tasks, it cannot gain access to another task's private code and data (see figure 7-3).

Since the GDT contains information that is accessible by all users (e.g., library routines, common data, Operating System services, etc.), the iAPX 286 uses privilege levels and special descriptor types to control access (see section 7.2.2). Privilege levels protect more trusted data and code (in GDT and LDT) from less trusted access (WITHIN a task), while the private virtual address spaces defined by unique LDTs provide protection BETWEEN tasks (see figure 7-4).

7.2.2 LDT and GDT Access Checks

All descriptor tables have a limit used by the protection hardware to ensure address space separation of tasks. Each task's LDT can be a different size as defined by its descriptor in the GDT. The GDT may also contain less than 8191 descriptors as defined by the GDT limit value. The descriptor table limit identifies the last valid byte of the last descriptor in that table. Since each descriptor is eight bytes long, the limit value is $N \times 8 - 1$ for N descriptors.

PROTECTION

Any attempt by a program to load a segment register, local descriptor table register (LDTR), or task register (TR) with a selector that refers to a descriptor outside the corresponding limit causes an exception with an error code identifying the invalid selector used (see figure 7-5).

Not all descriptor entries in the GDT or LDT need contain a valid descriptor. There can be

holes, or "empty" descriptors, in the LDT and GDT. "Empty" descriptors allow dynamic allocation and deletion of segments or other system objects without changing the size of the GDT or LDT. Any descriptor with an access byte equal to zero is considered empty. Any attempt to load a segment register with a selector that refers to an empty descriptor will cause an exception with an error code identifying the invalid selection.

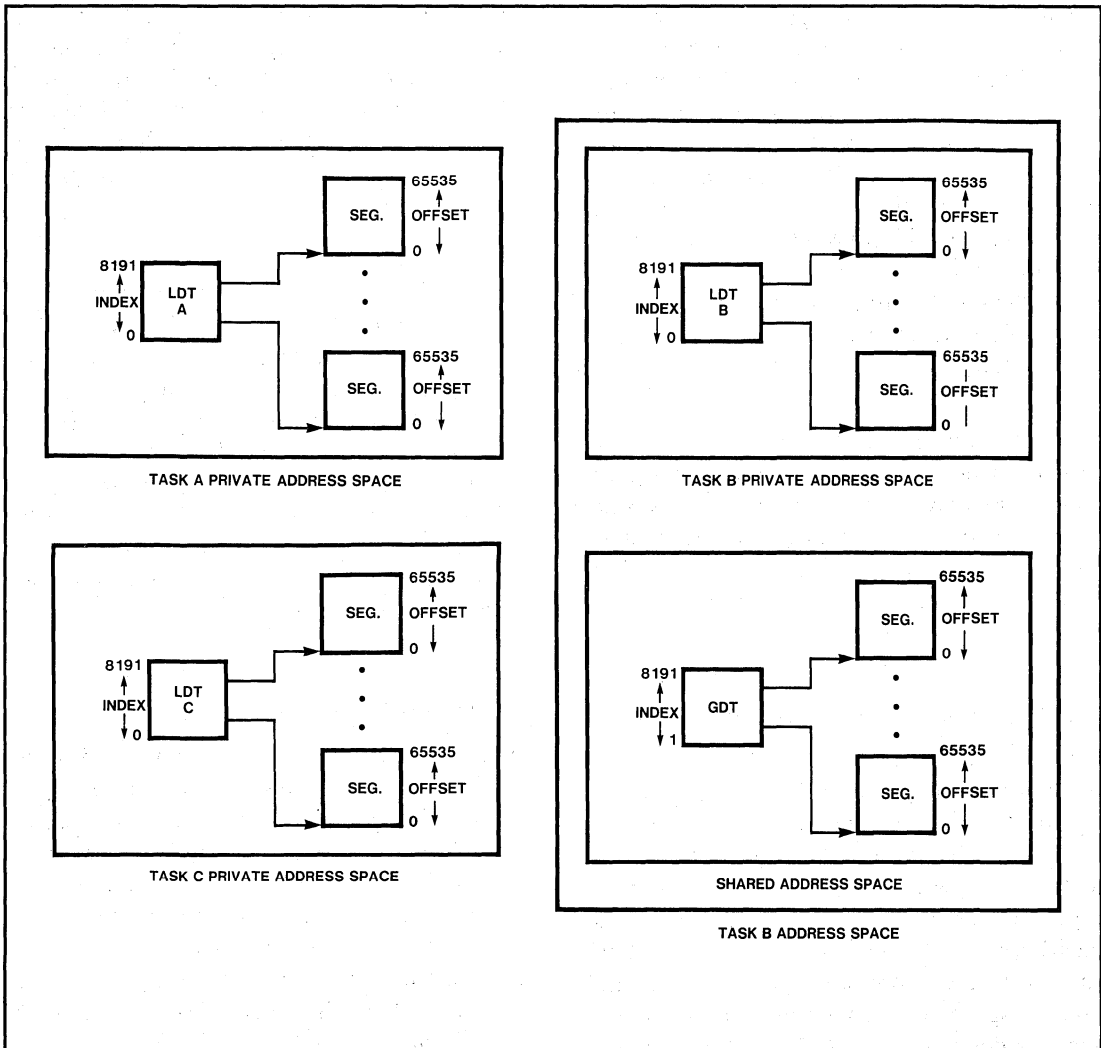


Figure 7-3. IAPX 286 Virtual Address Space

PROTECTION

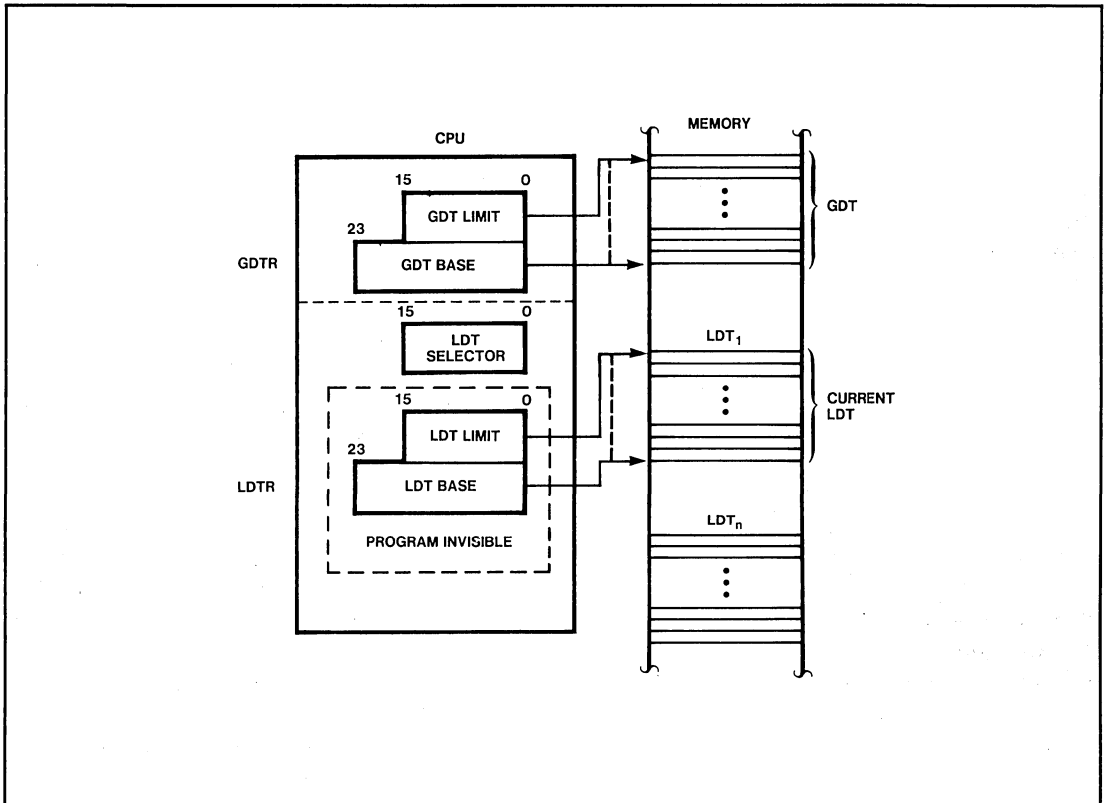


Figure 7-4. Local and Global Descriptor Table Definition

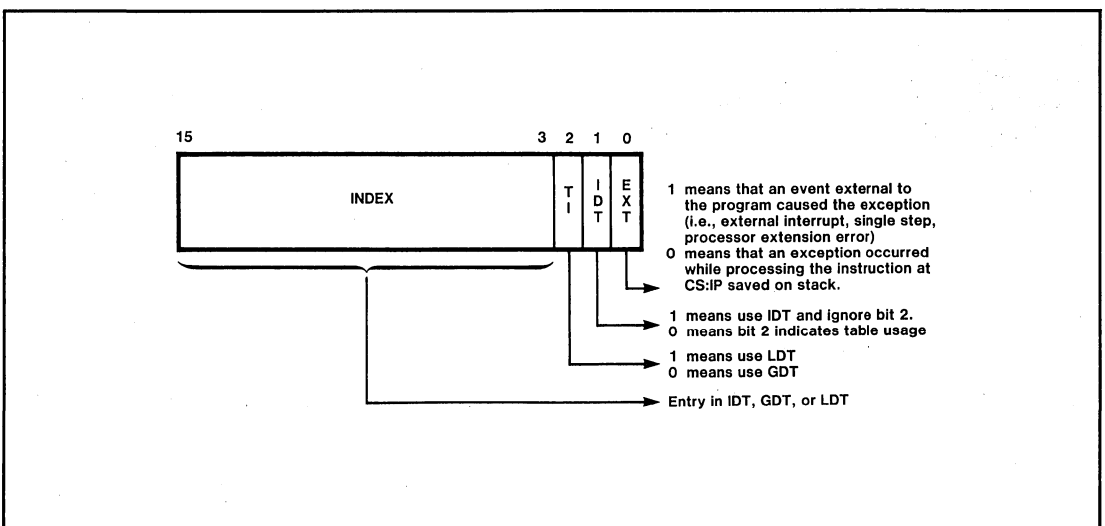


Figure 7-5. Error Code Format (on the Stack)

7.2.3 Type Validation

After checking that a selector reference is within the bounds of a descriptor table and refers to a non-empty descriptor, the type of segment defined by the descriptor is checked against the destination register. Since each segment register has predefined functions, each must refer to certain types of segments (see section 7.4.1). An attempt to load a segment register in violation of the protection rules causes an exception.

The "null" selector is a special type of segment selector. It has an index field of all zeros and a table indicator of 0. The null selector appears to refer to GDT descriptor entry #0 (see GDT in figure 7-3). This selector value may be used as a place holder in the DS or ES segment registers; it may be loaded into them without causing an exception. However, any attempt to use the null segment registers to reference memory will cause an exception and prevent any memory cycle from occurring.

7.3 PRIVILEGE LEVELS AND PROTECTION

As explained in section 6.2, each task has its own separate virtual address space defined by its LDT. All tasks share a common address space defined by the GDT. The system software then has direct access to task data and can treat all pointers in the same way.

Protection is required to prevent programs from improperly using code or data that belongs to the operating system. The four privilege levels of the iAPX 286 provide the isolation needed between the various layers of the system. The iAPX 286 privilege levels are numbered from 0 to 3, where 0 is the most trusted level, 3 the least.

Privilege level is a protection attribute assigned to all segments. It determines which procedures can access the segment. Like access rights and limit checks, privilege checks

are automatically performed by the hardware, and thus protects both data and code segments.

Privilege on the iAPX 286 is hierarchical. Operating system code and data segments placed at the most privileged level (0) cannot be accessed directly by programs at other privilege levels. Programs at privilege level 0 may access data at all other levels. Programs at privilege levels 1-3 may only access data at the same or less trusted (numerically greater) privilege levels. Figure 7-6 illustrates the privilege level protection of code or data within tasks.

In figure 7-6, programs can access data at the same or outer level, but not at inner levels. Code and data segments placed at level 1 cannot be accessed by programs executing at levels 2 or 3. Programs at privilege level 0 can access data at level 1 in the course of providing service to that level. iAPX 286 provides mechanisms for inter-level transfer of control when needed (see section 7.5).

The four privilege levels of the iAPX 286 are an extension of the typical two-level user/supervisor privilege mechanism. Like user mode, application programs in the outer level are not permitted direct access to data belonging to more privileged system services (supervisor mode). The iAPX 286 adds two more privilege levels to provide protection for different layers of system software (system services, I/O drivers, etc.).

7.3.1 Example of Using Four Privilege Levels

Two extra privilege levels allow development of more reliable, and flexible system software. This is achieved by dividing the system into small, independent units. Figure 7-6 shows an example of the usage of different protection levels. Here, the most privileged level is called

PROTECTION

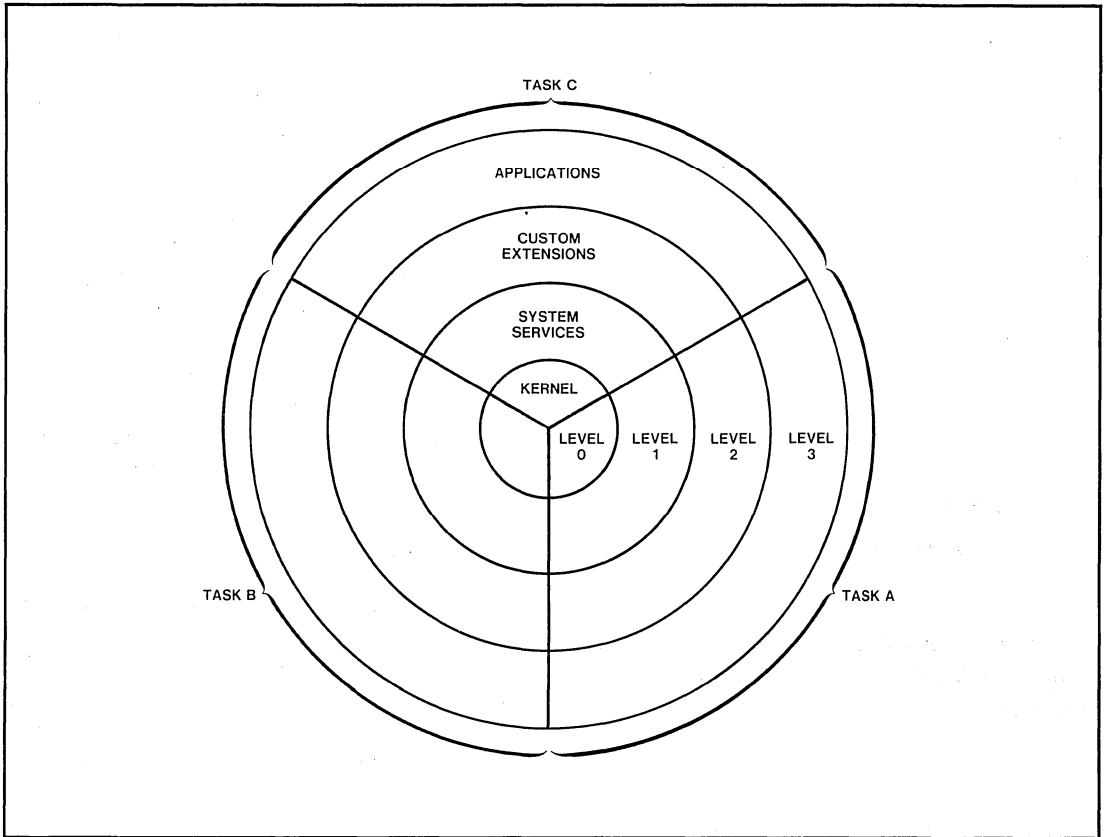


Figure 7-6. Code and Data Segments Assigned to a Privilege Level

the kernel. This software would provide basic, application-independent, CPU-oriented services to all tasks. Such services include memory management, task isolation, multi-tasking, inter-task communication, and I/O resource control. Since the kernel is only concerned with simple functions and cannot be affected by software at other privilege levels, it can be kept small, safe, and understandable.

Privilege level one is designated system services. This software provides high-level functions like file access scheduling, character I/O, data communications, and resource allocation policy which are commonly expected in all systems. Such software

remains isolated from applications programs and relies on the services of the kernel, yet cannot affect the integrity of level 0.

Privilege level 2 is the custom operating system extensions level. It allows standard system software to be customized. Such customizing can be kept isolated from errors in applications programs, yet cannot affect the basic integrity of the system software. Examples of customized software are the data base manager, logical file access services, etc.

This is just one example of protection mechanism usage. Levels 1 and 2 may be used in many different ways. The usage (or non-usage) is up to the system designer.

Programs at each privilege level are isolated from programs at outer layers, yet cannot affect programs in inner layers. Programs written for each privilege level can be smaller, easier to develop, and easier to maintain than a monolithic system where all system software can affect all other system software.

7.3.2 Privilege Usage

Privilege applies to tasks and three types of descriptors:

1. Main memory segments
2. Gates (control descriptors for state or task transitions, discussed in sections 7.5.1, 7.5.3, 8.3, 8.4 and 9.2)
3. Task state segments (discussed in Chapter 8).

Task privilege is a dynamic value. It is derived from the code segment currently being executed. Task privilege can change only when a control transfers to a different code segment.

Descriptor privilege, including code segment privilege, is assigned when the descriptor (and any associated segment) is created. The system designer assigns privilege directly when the system is constructed with the system builder (see the *iAPX 286 Builder User's Guide*) or indirectly via a loader.

Each task operates at only one privilege level at any given moment: namely that of the code segment being executed. (The conforming segments discussed in section 11.2 permit some flexibility in this regard.) However, as figure 7-6 indicates, the task may contain segments at one, two, three, or four levels, all of which are to be used at appropriate times. The privilege level of the task, then, changes under the carefully enforced rules for transfer of control from one code segment to another.

The descriptor privilege attribute is stored in the access byte of a descriptor and is called the Descriptor Privilege Level (DPL). Task privilege is called the Current Privilege Level (CPL). The least significant two bits of the CS register specify the CPL.

A few general rules of privilege can be stated before the detailed discussions of later sections. Data access is restricted to those segments whose privilege level is the same or less privileged (numerically greater) than the current privilege level (CPL). Direct code access, e.g., via call or jump, is restricted to code segments of equal privilege. A gate (section 7.5.1) is required for access to code at more privileged levels.

7.4 SEGMENT DESCRIPTOR

Although the format of access control information, discussed below, is similar for both data and code segment descriptors, the rules for accessing data segments differ from those for transferring control to code segments. Data segments are meant to be accessible from many privilege levels, e.g., from other programs at the same level or from deep within the operating system. The main restriction is that they cannot be accessed by less privileged code.

Code segments, on the other hand, are meant to be executed at a single privilege level. Transfers of control that cross privilege boundaries are tightly restricted, requiring the use of gates. Control transfers within a privilege level can also use gates, but they are not required. Control transfers are discussed in section 7.5.

Protection checks are automatically invoked at several points in selecting and using new segments. The process of addressing memory begins when the currently executing program attempts to load a selector into one of the segment registers. As discussed in Chapter 6, the selector has the form shown in figure 7-7.

PROTECTION

When a new selector is loaded into a segment register, the processor accesses the associated descriptor to perform the necessary loading and privilege checks.

verifying the descriptor type, the CPU compares the privilege level of the task (CPL) to the privilege level in the descriptor (DPL) before loading the descriptor's information into the cache.

The protection mechanism verifies that the selector points to a valid descriptor type for the segment register (see section 7.4.1). After

The general format of the eight bits in the segment descriptor's access rights byte is shown in table 7-1.

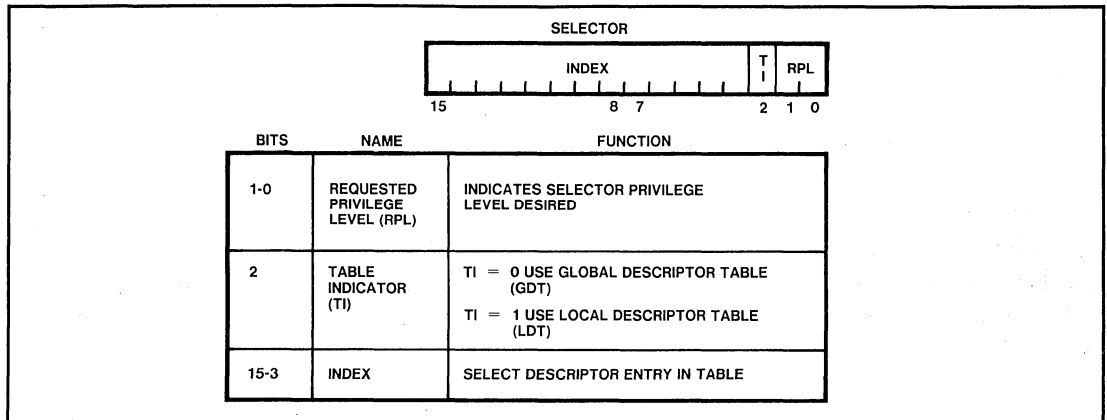


Figure 7-7. Selector Fields

Table 7-1. Segment Access Rights Byte Format

| Bit | Name | Description |
|--|------------|--|
| 7 | Present | 1 means Present and addressable in real memory; 0 means not present. See section 11.3. |
| 6,5 | DPL | 2-bit Descriptor Privilege Level, 0 to 3. |
| 4 | Segment | 1 means Segment descriptor; 0 means control descriptor. |
| For Segment=1, the remaining bits have the following meanings: | | |
| 3 | Executable | 1 means code, 0 means data. |
| 2 | C or ED | If code, Conforming: 1 means yes, 0 no. If data, Expand Down: 1 yes, 0 no—normal case. |
| 1 | R or W | If code, Readable: 1 means readable, 0 not. If data, Writable: 1 means writable, 0 not. |
| 0 | Accessed | 1 if segment descriptor has been Accessed, 0 if not. |

NOTE: When the Segment bit (bit 4) is 0, the descriptor is for a gate, a task state segment, or a Local Descriptor Table, and the meanings of bits 0 through 3 change. Control transfers and descriptors are discussed in section 7.5.

For example, the access rights byte for a data and code segment present in real memory but not yet accessed (at the same privilege level) are shown in figure 7-8.

Whenever a segment descriptor is loaded into a segment register, the accessed bit in the descriptor table is set to 1. This bit is useful for determining the usage profile of the segment.

NOTE

The Intel reserved bytes in the segment descriptor must be set to 0 for compatibility with *iAPX 386*.

7.4.1 Data Accesses

Data may be accessed in data segments or readable code segments. When DS or ES is loaded with a new selector, e.g., by an LDS, LES, or MOV to ES, SS, or DS instruction,

the bits in the access byte are checked to verify legitimate descriptor type and access (see table 7-2). If any test fails, an error code is pushed onto the stack identifying the selector involved (see figure 7-5 for the error code format).

A privilege check is made when the segment register is loaded. In general, a data segment's DPL must be numerically greater than or equal to the CPL. The DPL of a descriptor loaded into the SS must equal the CPL. Conforming code segments are an exception to privilege checking rules (see section 11.2).

Once the segment descriptor and selector are loaded, the offset of subsequent accesses within the segment are checked against the limit given in the segment descriptor. Violating the segment size limit causes a General Protection exception with an error code of 0.

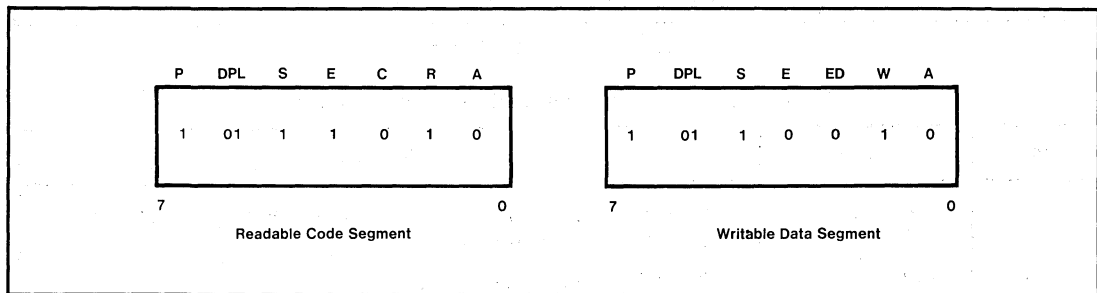


Figure 7-8. Access Byte Example

Table 7-2. Allowed Segment Types in Segment Registers

| Segment Register | Allowed Segment Types | | | |
|------------------|------------------------|-------------------------|---------------------------|---------------------------|
| | Read Only Data Segment | Read-Write Data Segment | Execute Only Code Segment | Execute-Read Code Segment |
| DS | Yes | Yes | No | Yes |
| ES | Yes | Yes | No | Yes |
| SS | No | Yes | No | No |
| CS | No | No | Yes | Yes |

A normal data segment is addressed with offset values ranging from 0 to the size of the segment. When the ED bit of the access rights byte in the segment descriptor is 0, the allowed range of offsets is 0000H to the limit. If limit is 0FFFFH, the data segment contains 65536 bytes.

Since stacks normally occupy different offset ranges (lower limit to 0FFFFH) than data segments, the limit field of a segment descriptor can be interpreted in two ways. The Expand Down (ED) bit in the access byte allows offsets for stack segments to be greater than the limit field. When ED is 1, the allowed range of offsets within the segment is limit+1 to 0FFFFH. To allow a full stack segment, set ED to 1 and the limit to 0FFFFH. The ED bit of a data segment descriptor does not have to be set for use in SS (i.e., it will not cause an exception). Section 7.5.4 discusses stack segment usage in greater detail. An expand down (ED=1) segment can also be loaded into ES or DS.

Limit and access checks are performed before any memory reference is started. For stack push instructions (PUSH, PUSHA, ENTER, CALL, INT), a possible limit violation is identified before any internal registers are updated. Therefore, these instructions are fully restartable after a stack size violation.

7.4.2 Code Segment Access

Code segments are accessed via CS for execution. Segments that are execute-only can ONLY be executed; they cannot be accessed via DS or ES, nor read via CS with a CS override prefix. If a segment is executable (bit 3=1 in the access byte), access via DS or ES is possible only if it is also readable. Thus, any code segment that also contains data must be readable. (Refer to Chapter 2 for a discussion of segment override prefixes.)

An execute-only segment preserves the privacy of the code against any attempt to read it; such an attempt causes a general protection fault with an error code of 0. A code segment cannot be loaded into SS and is never writable. Any attempted write will cause a general protection fault with an error code of 0.

The limit field of a code segment descriptor identifies the last byte in the segment. Any offset greater than the limit value will cause a general protection fault. The prefetcher of the iAPX 286 can never cause a code segment limit violation with an error code of 0. The program must actually attempt to execute an instruction beyond the end of the code segment to cause an exception.

If a readable non-conforming code segment is to be loaded into DS or ES, the privilege level requirements are the same as those stated for data segments in 7.4.1.

Code segments are subject to different privilege checks when executed. The normal privilege requirement for a jump or call to another code segment is that the current privilege level equal the descriptor privilege level of the new code segment. Jumps and calls within the current code segment automatically obey this rule.

Return instructions may pass control to code segments at the same or less (numerically greater) privileged level. Code segments at more privileged levels may only be reached via a call through a call gate as described in section 7.5.

An exception to this, previously stated, is the conforming code segment that allows the DPL of the requested code segment to be numerically less than (of greater privilege than) the CPL. Conforming code segments are discussed in section 11.2.

7.4.3 Data Access Restriction by Privilege Level

This section describes privilege verification when accessing either data segments (loading segment selectors into DS, ES, or SS) or readable code segments. Privilege verification when loading CS for transfer of control across privilege levels is described in the next section.

Three basic kinds of privilege level indicators are used when determining accessibility to a segment for reading and writing. They are termed Current Privilege Level (CPL), Descriptor Privilege Level (DPL), and Requested Privilege Level (RPL). The CPL is simply the privilege level of the code segment that is executing (except if the current code segment is conforming). The CPL is stored as bits 0 and 1 of the CS and SS registers. Bits 0 and 1 of DS and ES are not related to CPL.

DPL is the privilege level of the segment; it is stored in bits 5 and 6 of the access byte of a descriptor. For data access to data segments and non-conforming code segments, CPL must be numerically less than or equal to DPL (the task must be of equal or greater privilege) for access to be granted. Violation of this rule during segment load instruction causes a general protection exception with an error code identifying the selector.

While the enforcement of DPL protection rules provides the mechanism for the isolation of code and data at different privilege levels, it is conceivable that an erroneous pointer passed onto a more trusted program might result in the illegal modification of data with a higher privilege level. This possibility is prevented by the enforcement of effective privilege level protection rules and correct usage of the RPL value.

The RPL (requested privilege level) is used for pointer validation. It is the least signifi-

cant two bits in the selector value loaded into any segment register. RPL is intended to indicate the privilege level of the originator of that selector. A selector may be passed down through several procedures at different levels. The RPL reflects the privilege level of the original supplier of the selector, not the privilege level of the intermediate supplier. The RPL must be numerically less than or equal to the DPL of the descriptor selected, thereby indicating greater or equal privilege of the supplier; otherwise, access is denied and a general protection violation occurs.

Pointer validity testing is required in any system concerned with preventing program errors from destroying system integrity. The iAPX 286 provides hardware support for pointer validity testing. The RPL field indicates the privilege level of the originator of the pointer to the hardware. Access will be denied if the originator of the pointer did not have access to the selected segment even if the CPL is numerically less than or equal to the DPL. RPL can reduce the effective privilege of a task when using a particular selector. RPL *never* allows access to more privileged segments (CPL must always be numerically less than or equal to DPL).

A fourth term is sometimes used: the Effective Privilege Level (EPL). It is defined as the numeric maximum of the CPL and the RPL—meaning the one of lesser privilege. Access to a protected entity is granted only when the EPL is numerically less than or equal to the DPL of that entity. This is simply another way of saying that both CPL and RPL must be numerically less than or equal to DPL for access to be granted.

7.4.4 Pointer Privilege Stamping via ARPL

The ARPL instruction is provided in the iAPX 286 to fill the RPL field of a selector with the minimum privilege (maximum

numeric value) of the selector's current RPL and the caller's CPL (given in an instruction-specified register). A straight insertion of the caller's CPL would stamp the pointer with the privilege level of the caller, but not necessarily the ultimate originator of the selector (e.g., Level 3 supplies a selector to a level 2 routine that calls a level 0 routine with the same selector).

Figure 7-9 shows a program with an example of such a situation. The program at privilege level 3 calls a routine at level 2 via a gate. The routine at level 2 uses the ARPL instruction to assure that the selector's RPL is 3. When the level 2 routine calls a routine at level 0 and passes the selector, the ARPL instruction at level 0 leaves the RPL field unchanged.

Stamping a pointer with the originator's privilege eliminates the complex and time-consuming software typically associated with pointer validation in less comprehensive architectures. The iAPX 286 hardware performs the pointer test automatically while loading the selector.

Privilege errors are trapped at the time the selector is loaded because pointers are commonly passed to other routines, and it may not be possible to identify a pointer's originator. To verify the access capabilities of

a pointer, it should be tested when the pointer is first received from an untrusted source. The VERR (Verify Read), VERW (Verify Write), and LAR (Load Access Rights) instructions are provided for this purpose.

Although pointer validation is fully supported in the iAPX 286, its use is an option of the system designer. To accommodate systems that do not require it, RPL can be ignored by setting selector RPLs to zero (except stack segment selectors) and not adjusting them with the ARPL instruction.

7.5 CONTROL TRANSFERS

Three kinds of control transfers can occur within a task:

1. Within a segment, causing no change of privilege level (a *short* jump, call, or return).
2. Between segments at the same privilege level (a *long* jump, call, or return).
3. Between segments at different privilege levels (a *long* call, or return). (NOTE: A JUMP to a different privilege level is not allowed.)

The first two types of control transfers need no special controls (with respect to privilege protection) beyond those discussed in section 7.4.

| | | | |
|----------|--------------|---------------------|---------------------------------------|
| Level 3 | PUSH CALL | SELECTOR LEVEL_2 | ; RPL value doesn't matter at level 3 |
| <hr/> | | | |
| Level_2: | ENTER | 4,0 | |
| | MOV | AX, [BP]+4 | ; GET CS of return address, RPL=3 |
| | ARPL | [BP]+6, AX | ; Put 3 in RPL field |
| Level 2 | : | | |
| | : | | |
| | PUSH | WORD PTR [BP]+6 | ; Pass selector |
| | CALL | Level_0 | |
| <hr/> | | | |
| Level_0: | ENTER | 6,0 | |
| Level 0 | MOV | AX, [BP]+4 | ; Get CS of return address, RPL=2 |
| | ARPL | [BP]+6, AX | ; Leaves RPL unchanged |

Figure 7-9. Pointer Privilege Stamping

Inter-level transfers require special consideration to maintain system integrity. The protection hardware must check that:

- The task is currently allowed to access the destination address.
- The correct entry address is used.

To achieve control transfers, a special descriptor type called a gate is provided to mediate the change in privilege level. Control transfer instructions call the gate rather than transfer directly to a code segment. From the viewpoint of the program, a control transfer to a gate is the same as to another code segment.

Gates allow programs to use other programs at more privileged levels in the same manner as a program at the same privilege level. Programmers need never distinguish between programs or subroutines that are more privileged than the current program and those that are not. The system designer may, however, elect to use gates *only* for control transfers that cross privilege levels.

7.5.1 Gates

A gate is a four-word control descriptor used to redirect a control transfer to a different code segment in the same or more privileged level or to a different task. There are four types of gates: call, trap, interrupt, and task gates. The access rights byte distinguishes a gate from a segment descriptor, and determines which type of gate is involved. Figure 7-10 shows the format of a gate descriptor.

A key feature of a gate is the re-direction it provides. All four gate types define a new address which transfers control when invoked. This destination address normally cannot be accessed by a program. Loading the selector to a call gate into SS, DS, or ES will cause a general protection fault with an error code identifying the invalid selector.

Only the selector portion of an address is used to invoke a gate. The offset is ignored. All that a program need know about the desired function is the selector required to invoke the gate. The iAPX 286 will automatically start the execution at the correct address stored within the gate.

A further advantage of a gate is that it provides a fixed address for any program to invoke another program. The calling program's address remains unaltered even if the entry address of the destination program changes. Thus, gates provide a fixed set of entry points that allow a task to access Operating System functions such as simple subroutines, yet the task is prohibited from simply jumping into the middle of the Operating System.

Call gates, as described in the next section, are used for control transfers within a task which must either be transparently redirected or which require an increase in privilege level. A call gate normally specifies a subroutine at a greater privilege level, and the called routine returns via a return instruction. Call gates also support delayed binding (resolution of target routine addresses at run-time rather than program-generation-time).

Trap and interrupt gates handle interrupt operations that are to be serviced within the current task. Interrupt gates cause interrupts to be disabled; trap gates do not. Trap and interrupt gates both require a return via the interrupt return instruction.

Task gates are used to control transfers between tasks and to make use of task state segments for task control and status information. Tasks are discussed in Chapter 8, interrupts in Chapter 9.

In the iAPX 286 protection model, each privilege level has its own stack. Therefore, a

control transfer (call or return) that changes the privilege level causes a new stack to be invoked.

7.5.1.1 CALL GATES

Call gate descriptors are used by call and jump instructions in the same manner as a code segment descriptor. The hardware automatically recognizes that the destination selector refers to a gate descriptor. Then, the operation of the instruction is expanded as determined by the contents of the call gate. A jump instruction can access a call gate *only if* the target code segment is at the same

privilege level. A call instruction uses a call gate for the same or more privileged access.

A call gate descriptor may reside in either the GDT or the LDT, but not in the IDT. Figure 7-10 gives the complete layout of a call gate descriptor.

A call gate can be referred to by either the long JMP or CALL instructions. From the viewpoint of the program executing a JMP or CALL instruction, the fact that the destination was reached via a call gate and not directly from the destination address of the instruction is not apparent.

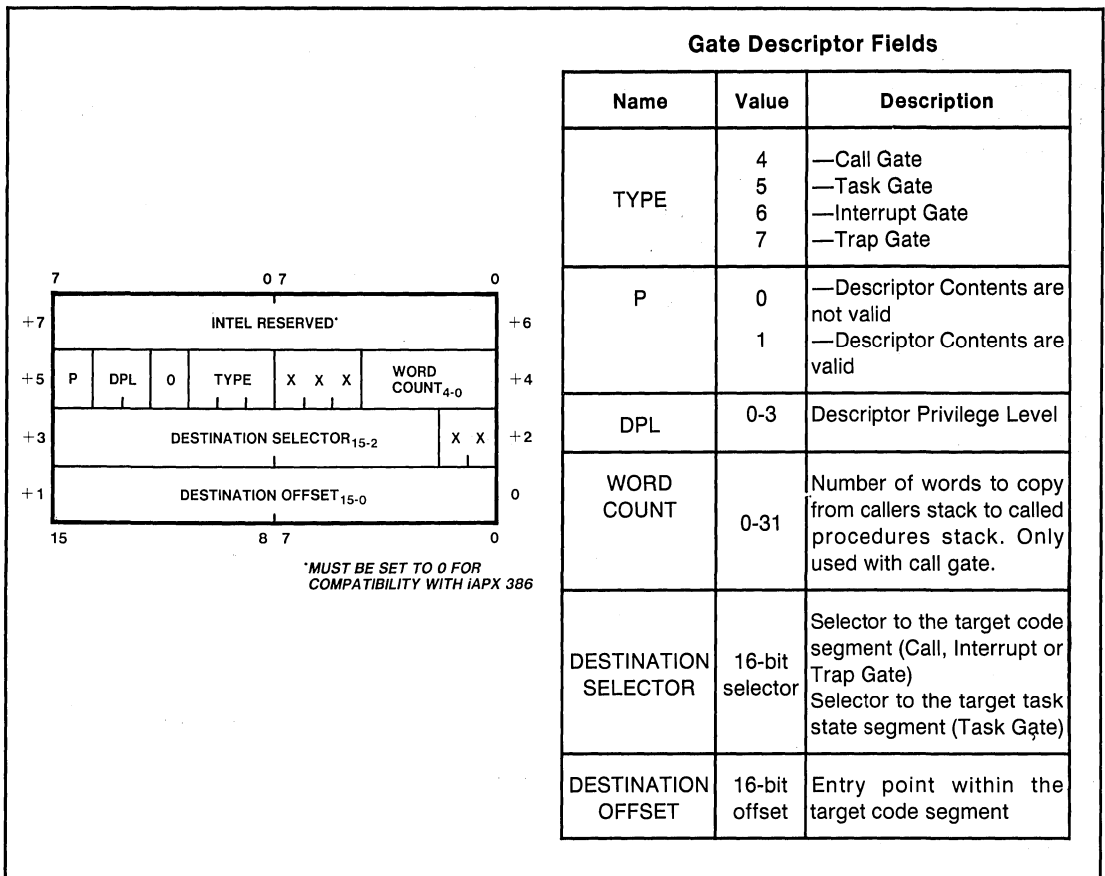


Figure 7-10. Gate Descriptor Format

The following is a description of the protection checks performed while transferring control (with the CALL instruction) through a call gate:

- Verifying that access to the call gate is allowed. One of the protection features provided by call gates is the access checks made to determine if the call gate may be used (i.e., checking if the privilege level of the calling program is adequate).
- Determining the destination address and whether a privilege transition is required. This feature makes privilege transitions transparent to the caller.
- Performing the privilege transition, if required.

Verifying access to a call gate is the same for any call gate and is independent of whether a JMP or CALL instruction was used. The rules of privilege used to determine whether a data segment may be accessed are employed to check if a call gate may be jumped-to or called. Thus, privileged subroutines can be hidden from untrusted programs by the absence of a call gate.

When an inter-segment CALL or JMP instruction selects a call gate, the gate's privilege and presence will be checked. The gate's DPL (in the access byte) is checked against the EPL (MAX (task CPL, selector RPL)). If $EPL > CPL$, the program is less privileged than the gate and therefore it may not make a transition. In this case, a general protection fault occurs with an error code identifying the gate. Otherwise, the gate is accessible from the program executing the call, and the control transfer is allowed to continue. After the privilege checks, the descriptor presence is checked. If the present bit of the gate access rights byte is 0 (i.e., the target code segment is not present), not present fault occurs with an error code identifying the gate.

The checks indicated in table 7-3 are applied to the contents of the call gate. Violating any of them causes the exception shown. The low order two bits of the error code are zero for these exceptions.

The checks indicated in table 7-3 are applied to the contents of the call gate. Violating any of them causes the exception shown. The low order two bits of the error code are zero for these exceptions.

7.5.1.2 INTRA-LEVEL TRANSFERS VIA CALL GATE

The transfer is Intra-level if the destination code segment is at the same privilege level as CPL. Either the code segment is non-conforming with $DPL = CPL$ or it is conforming, with $DPL \leq CPL$ (see section 11.2 for this case). The 32-bit destination address in the gate is loaded into CS:IP.

Table 7-3. Call Gate Checks

| Type of Check | Fault ⁽¹⁾ | Error Code |
|---|----------------------|-----------------|
| Selector is not Null | GP | 0 |
| Selector is within Descriptor Table Limit | GP | Selector id |
| Descriptor is a Code Segment | GP | Code Segment id |
| Code Segment is Present | NP | Code Segment id |
| Nonconforming Code Segment $DPL > CPL$ | GP | Code Segment id |

NOTES:

⁽¹⁾ GP = General Protection, NP = Not-Present Exception.

The offset portion of the JMP or CALL destination address which refers to a call gate is always ignored.

If the IP value is not within the limit of the code segment, a general protection fault occurs with an error code of 0. If a CALL instruction is used, the return address is saved in the normal manner. The only effect of the call gate is to place a different address into CS:IP than that specified in the destination address of the JMP or CALL instruction. This feature is useful for systems which require that a fixed address be provided to programs, even though the entry address for the routine may change due to different functions, software changes, or segment relocation.

7.5.1.3 INTER-LEVEL CONTROL TRANSFER VIA CALL GATES

If the destination code segment of the call gate is at a different privilege level than the CPL, an inter-level transfer is being requested. However, if the destination code

segment $DPL > CPL$, then a general protection fault occurs with an error code identifying the destination code segment.

The gate guarantees that all transitions to a more privileged level will go to a valid entry point rather than possibly into the middle of a procedure (or worse, into the middle of an instruction). See figure 7-11.

Calls to more privileged levels may be performed only through call gates. A JMP instruction can never cause a privilege change. Any attempt to use a call gate in this manner will cause a general protection fault with an error code identifying the gate. Returns to more privileged levels are also prohibited. Inter-level transitions due to interrupts use a different gate, as discussed in Chapter 9.

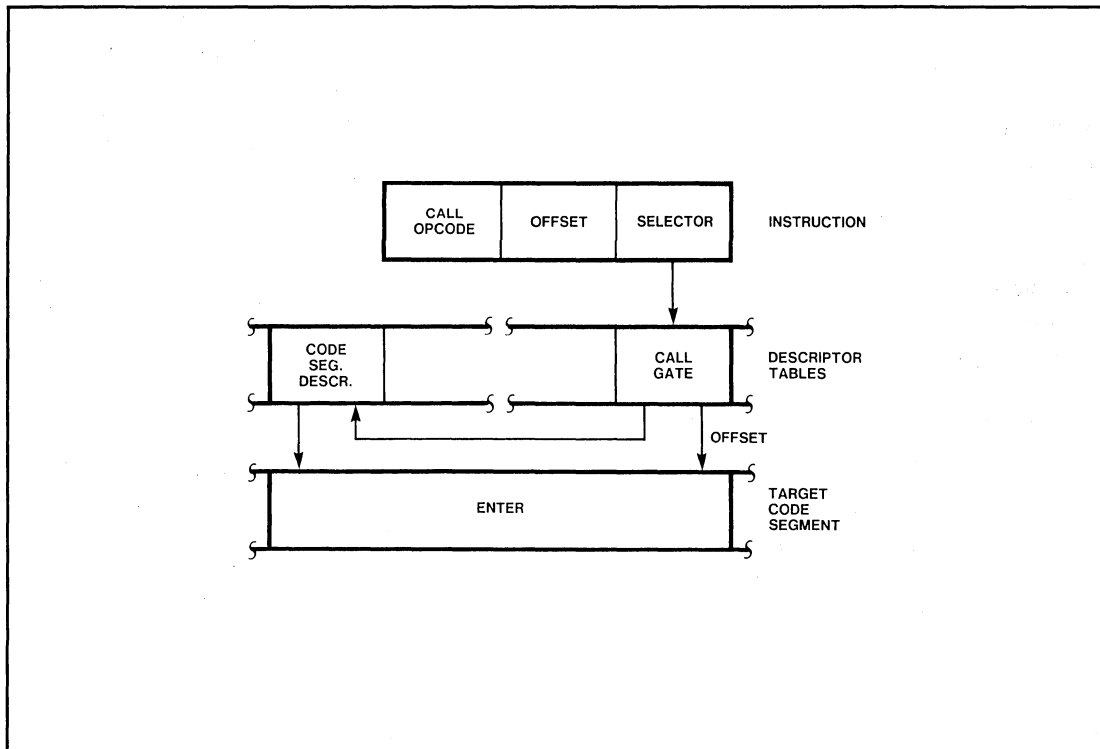


Figure 7-11. Call Gate

The RPL field of the CS selector saved as part of the return address will always identify the caller's CPL. This information is necessary to correctly return to the caller's privilege level during the return instruction. Since the CALL instruction places the CS value on the more privileged stack, and JMP instructions cannot change privilege levels, it is not possible for a program to maliciously place an invalid return address on the caller's stack.

7.5.1.4 STACK CHANGES CAUSED BY CALL GATES

To maintain system integrity, each privilege level has a separate stack. Furthermore, each task normally uses separate stacks from other tasks for each privilege level. These stacks assure sufficient stack space to process calls from less privileged levels. Without them, trusted programs may not work correctly, especially if the calling program does not provide sufficient space on the caller's stack.

When a call gate is used to change privilege levels, a new stack is selected as determined by the new CPL. The new stack pointer value is loaded from the Task State Segment (TSS). The privilege level of the new stack data segment must equal the new CPL; if it does not, a task stack fault occurs with the saved machine state pointing at the CALL instruction and the error code identifying the invalid stack selector.

The new stack should contain enough space to hold the old SS:SP, the return address, and all parameters and local variables required to process the call. The initial stack pointers for privilege levels 0-2 in the TSS are strictly read only values. They are never changed during the course of execution.

The normal technique for passing parameters to a subroutine is to place them onto the stack. To make privilege transitions transparent to the called program, a call gate specifies that

parameters are to be copied from the old stack to the new stack. The word count field in a call gate (see figure 7-10) specifies how many words (up to 31) are to be copied from the caller's stack to the new stack. If the word count is zero, no parameters are copied.

Before copying the parameters, the new stack is checked to assure that it is large enough to hold the parameters; if it is not, a stack fault occurs with an error code of 0. After the parameters are copied, the return link is on the new stack (i.e., a pointer to the old stack is placed in the new stack). In particular, the return address is pointed at by SS:SP. The call and return example of figure 7-12 illustrate the stack contents after a successful inter-level call.

The stack pointer of the caller is saved above the caller's return address as the first two words pushed onto the new stack. The caller's stack can only be saved for calls to procedures at privilege levels 2, 1, and 0. Since level 3 cannot be called by any procedure at any other privilege level, the level 3 stack will never contain links to other stacks.

Procedures requiring more than the 31 words for parameters that may be called from another privilege level must use the saved SS:SP link to access all parameters beyond the last word copied.

The call gate does not check the values of the words copied onto the new stack. The called procedure should check each parameter for validity. Section 11.3 discusses how the ARPL, VERR, VERW, LSL, and LAR instructions can be used to check pointer values.

7.5.2 Inter-Level Returns

An inter-segment return instruction can also change levels, but only toward programs of

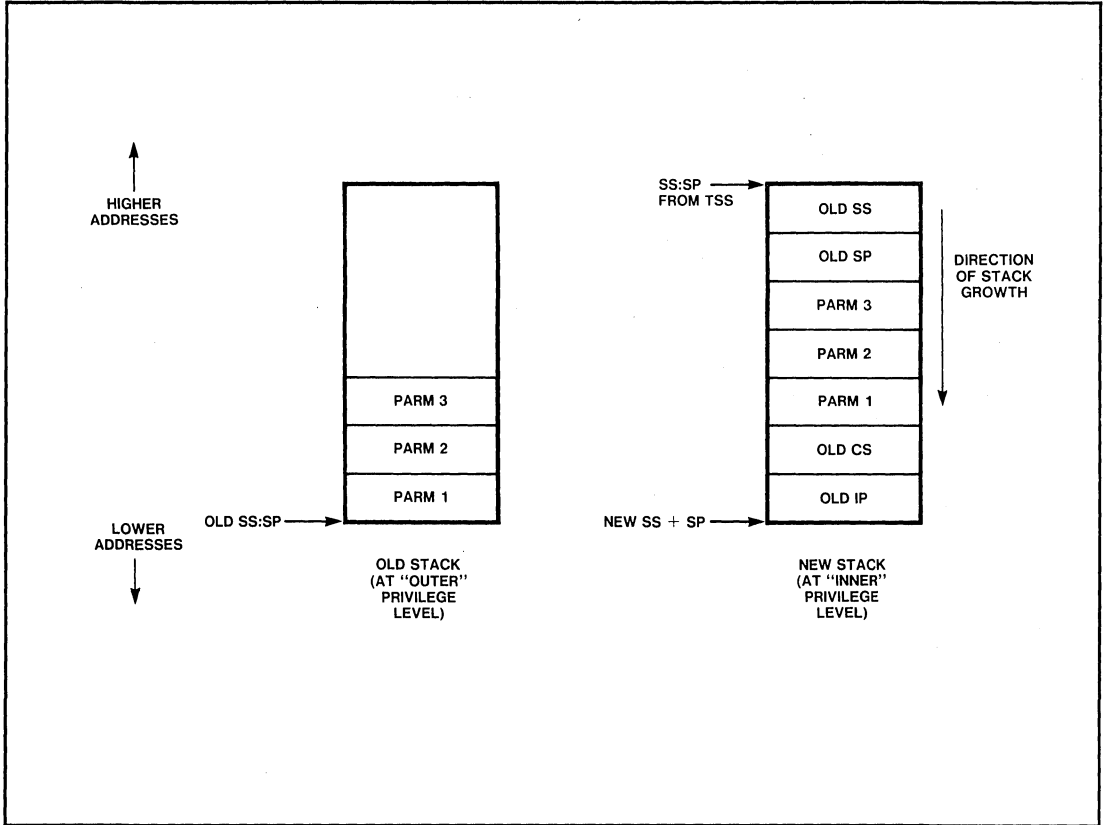


Figure 7-12. Stack Contents After an Inter-Level Call

equal or lesser privilege (when code segment DPL is numerically greater or equal than the CPL). The RPL of the selector popped off the stack by the return instruction identifies the privilege level to resume execution of the calling program.

When the RET instruction encounters a saved CS value whose RPL > CPL, an inter-level return occurs. Checks shown in table 7-4 are made during such a return.

The old SS:SP value is then adjusted by the number of bytes indicated in the RET instruction and loaded into SS:SP. The new SP value is not checked for validity. If SP is invalid it is not recognized until the first stack

operation. The SS:SP value of the returning program is not saved. (Note: this value normally is the same as that saved in the TSS.)

The last step in the return is checking the contents of the DS and ES descriptor register. If DS or ES refer to segments whose DPL is greater than the new CPL (excluding conforming code segments), the segment registers are loaded with the null selector. Any subsequent memory reference that attempts to use the segment register containing the null selector will cause a general protection fault. This prevents less privileged code from accessing more privileged data previously accessed by the more privileged program.

PROTECTION

Table 7-4. Inter-Level Return Checks

| Type of Check | Exception* | Error Code |
|--|------------|--------------|
| SP is not within Segment Limit | SF | 0 |
| SP + N + 7 is not in Segment Limit | SF | 0 |
| RPL of Return CS is Greater than CPL | GP | Return CS id |
| Return CS Selector is not null | GP | Return CS id |
| Return CS segment is within Descriptor Table Limit | GP | Return CS id |
| Return CS Descriptor is a Code Segment | GP | Return CS id |
| Return CS Segment is Present | NP | Return CS id |
| DPL of Return Non-Conforming Code Segment = RPL of CS | GP | Return CS id |
| SS Selector at SP + N + 6 is not Null | SF | Return SS id |
| SS Selector at SP + N + 6 is within Descriptor Table Limit | SF | Return SS id |
| SS Descriptor is Writable Data Segment | SF | Return SS id |
| SS Segment is Present | SF | Return SS id |
| SS Segment DPL = RPL of CS | SF | Return SS id |

*SF = Stack Fault, GP = General Protection Exception, NP = Not-Present Exception

Tasks And State Transitions

8

CHAPTER 8

TASKS AND STATE TRANSITIONS

8.1 INTRODUCTION

An iAPX 286 task is a single, sequential thread of execution. Each task can be isolated from all other tasks. There may be many tasks associated with an iAPX 286 CPU, but only one task executes at any time. Switching the CPU from executing one task to executing another can occur as the result of either an interrupt or an inter-task CALL, JMP or IRET. A hardware-recognized data structure defines each task.

The iAPX 286 provides a high performance task switch operation with complete isolation between tasks. A full task-switch operation takes only 22 microseconds at 8 MHz (18 microseconds at 10 MHz). High-performance, interrupt-driven, multi-application systems that need the benefits of protection are feasible with the 80286.

A performance advantage and system design advantage arise from the iAPX 286 task switch:

- **Faster task switch:** A task switch is a single instruction performed by microcode. Such a scheme is 2-3 times faster than an explicit task switch instruction. A fast task switch translates to a significant performance boost for heavily multi-tasked systems over conventional methods.
- **More reliable, flexible systems:** The isolation between tasks and the high speed task switch allows interrupts to be handled by separate tasks rather than within the currently interrupted task. This isolation of interrupt handling code from normal programs prevents undesirable interactions between them. The interrupt

system can become more flexible since adding an interrupt handler is as safe and easy as adding a new task.

- Every task is protected from all others via the separation of address spaces described in Chapter 7, including allocation of unique stacks to each active privilege level in each task (unless explicit sharing is planned in advance). If the address spaces of two tasks include no shared data, one task cannot affect the data of another task. Code sharing is always safe since code segments may never be written into.

8.2 TASK STATE SEGMENTS AND DESCRIPTORS

Tasks are defined by a special control segment called a Task State Segment (TSS). For each task, there must be a unique TSS. The definition of a task includes its address space and execution state. A task is invoked (made active) by inter-segment jump or call instructions whose destination address refers to a task state segment or a task gate.

The Task State Segment (TSS) has a special descriptor. The Task Register within the CPU contains a selector to that descriptor. Each TSS selector value is unique, providing an unambiguous "identifier" for each task. Thus, an operating system can use the value of the TSS selector to uniquely identify the task.

A TSS contains 22 words that define the contents of all registers and flags, the initial stacks for privilege levels 0-2, the LDT selector, and a link to the TSS of the previously executing task. Figure 8-1 shows the layout of the TSS. The TSS can not be written into like an ordinary data segment.

TASKS AND STATE TRANSITIONS

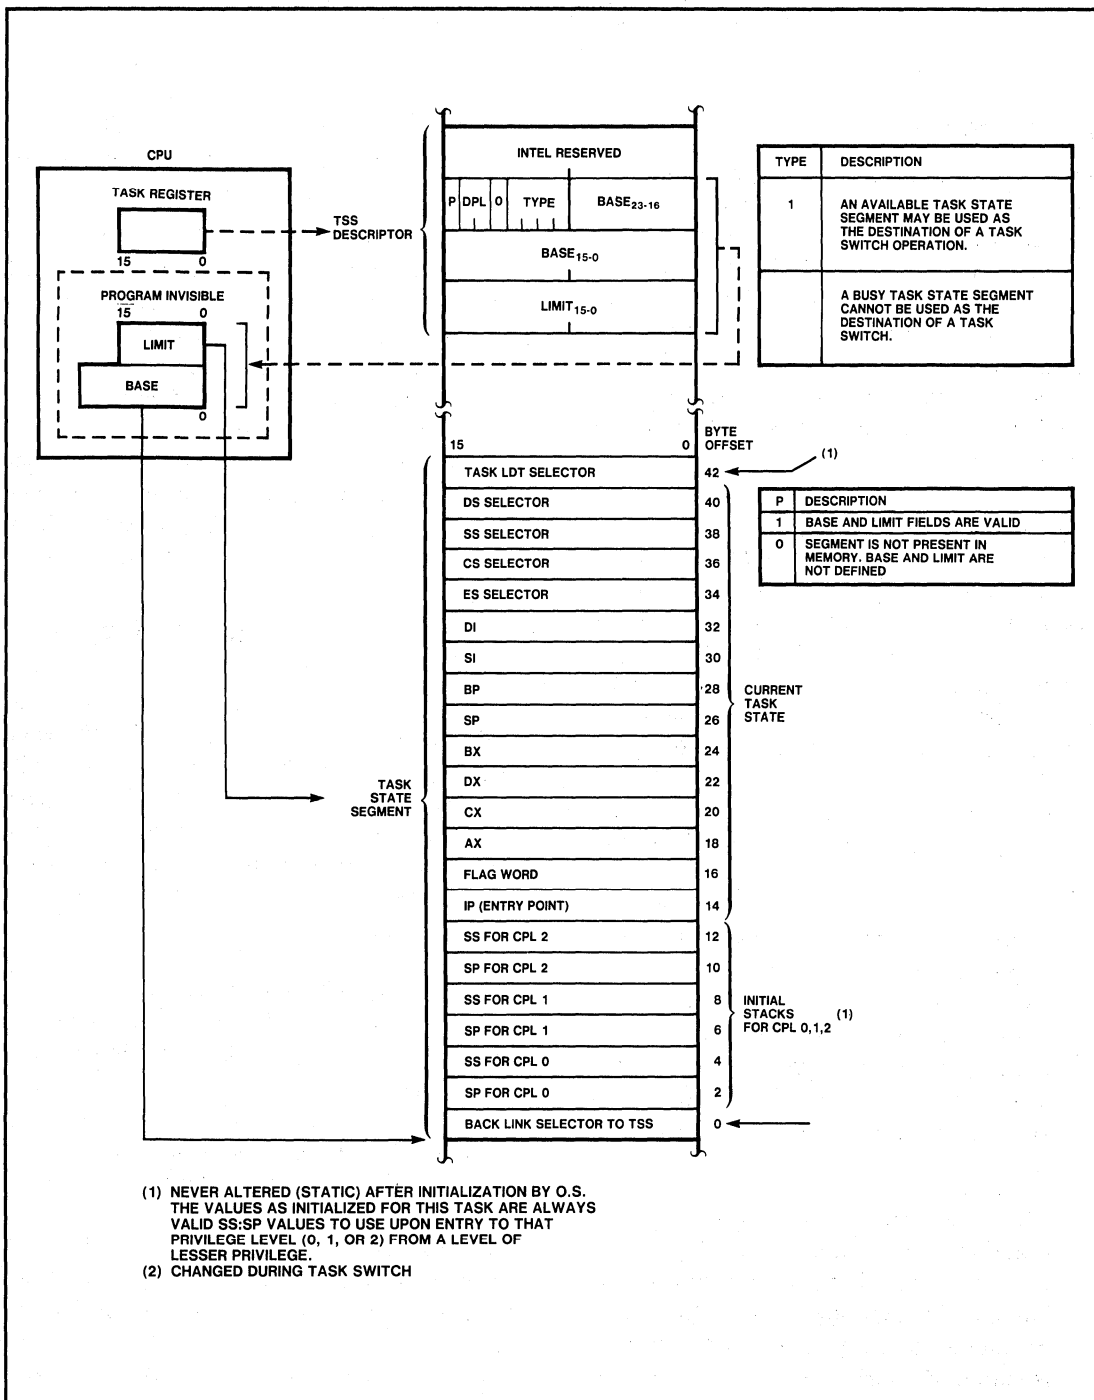


Figure 8-1. Task State Segment and TSS Registers

Each TSS consists of two parts, a static portion and a dynamic portion. The static entries are never changed by the iAPX 286, while the dynamic entries are changed by each task switch out of this task. The static portions of this segment are the task LDT selector and the initial SS:SP stack pointer addresses for levels 0-2.

The modifiable or dynamic portion of the task state segment consists of all dynamically-variable and programmer-visible processor registers, including flags, segment registers, and the instruction pointer. It also includes the linkage word used to chain nested invocations of different tasks.

The link word provides a history of which tasks invoked others. The link word is important for restarting an interrupted task when the interrupt has been serviced. Placing the back link in the TSS protects the identity of the interrupted task from changes by the interrupt task, since the TSS is not writable by the interrupt task. (In most systems only the operating system has sufficient privilege to create or use a writable data segment "alias" descriptor for the TSS.)

The stack pointer entries in the TSS for privilege levels 0-2 are static (i.e., never written during a privilege or task switch). They define the stack to use upon entry to that privilege level. These stack entries are initialized by the operating system when the task is created. If a privilege level is never used, no stack need be allocated for it.

When entering a more privileged level, the caller's stack pointer is saved on the stack of the new privilege level, not in the TSS. Leaving the privilege level requires popping the caller's return address and stack pointer off the current stack. The stack pointer at that time will be the same as the initial value

loaded from the TSS upon entry to the privilege level.

There is only one stack active at any time, the one defined by the SS and SP registers. The only other stacks that may be non-empty are those at outer (less privileged) levels that called the current level. Stacks for inner levels must be empty, since outward (to numerically larger privilege levels) calls from inner levels are not allowed.

The location of the stack pointer for an outer privilege level will always be found at the start of the stack of the inner privilege level called by that level. That stack may be the initial stack for this privilege level or an outer level. Look at the start of the stack for this privilege level. The TSS contains the starting stack address for levels 0-2. If the RPL of the saved SS selector is the privilege level required, then the stack pointer has been found. Otherwise, go to the beginning of the stack defined by that value and look at the saved SS:SP value there.

8.2.1 Task State Segment Descriptors

A special descriptor is used for task state segments. This descriptor must be accessible at all times; therefore, it can appear only in the GDT. The access byte distinguishes TSS descriptors from data or code segment descriptors. When bits 0 through 4 of the access byte are 00001 or 00011, the descriptor is for a TSS.

The complete layout of a task state segment descriptor is shown in figure 8-2.

Like a data segment, the descriptor contains a base address and limit field. The limit must be at least 002BH (43) to contain the minimum amount of information required for a TSS. An invalid task exception will occur if

TASKS AND STATE TRANSITIONS

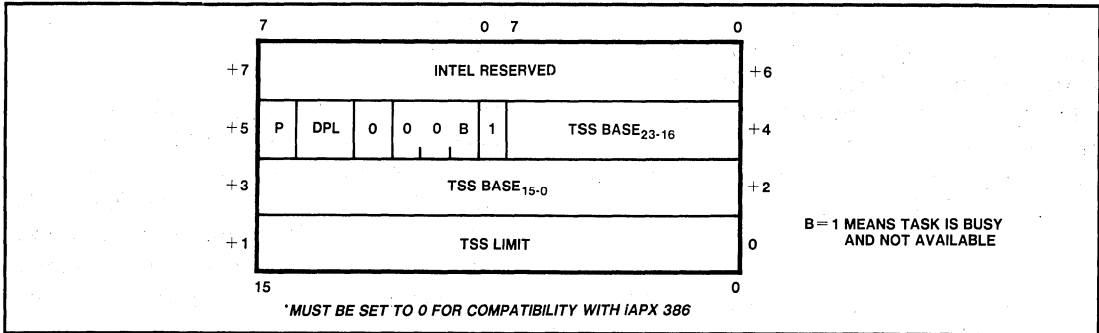


Figure 8-2. TSS Descriptor

an attempt is made to switch to a task whose TSS descriptor limit is less than 43. The error code will identify the bad TSS.

The P-bit (Present) flag indicates whether this descriptor contains currently valid information: 1 means yes, 0 no. A task switch that attempts to reference a not-present TSS causes a not-present exception code identifying the task state segment selector.

The descriptor privilege level (DPL) controls use of the TSS by JMP or CALL instructions. By the same reasoning as that for call gates, DPL can prevent a program from calling the TSS and thereby cause a task switch. Section 8.3 discusses privilege considerations during a task switch in greater detail.

Bit 4 is always 0 since TSS is a control segment descriptor. Control segments cannot be accessed by SS, DS, or ES. Any attempt to load those segment registers with a selector that refers to a control segment causes general protection trap. This rule prevents the program from improperly changing the contents of a control segment.

TSS descriptors can have two states: idle and busy. Bit 1 of the access byte distinguishes them. The distinction is necessary since tasks are not re-entrant; a busy TSS may not be invoked.

8.3 TASK SWITCHING

A task switch may occur in one of four ways:

1. The destination selector of a long JMP or CALL instruction refers to a TSS descriptor. The offset portion of the destination address is ignored.
2. An IRET instruction is executed when the NT bit in the flag word = 1. The new task TSS selector is in the back link field of the current TSS.
3. The destination selector of a long JMP or CALL instruction refers to a task gate. The offset portion of the destination address is ignored. The new task TSS selector is in the gate. (See section 8.5 for more information on task gates.)
4. An interrupt occurs. This interrupt's vector refers to a task gate in the interrupt descriptor table. The new task TSS selector is in the gate. See section 9.4 for more information on interrupt tasks.

No new instructions are required for a task switch operation. The standard iAPX 86 JMP, CALL, IRET, or interrupt operations perform this function. The distinction between the standard instruction and a task switch is made either by the type of descriptor referenced (for CALL, JMP, or INT) or by the NT bit (for IRET) in flag word.

Using the CALL or INT instruction to switch tasks implies a return is expected from the called task. The JMP and IRET instructions imply no return is expected from the new task.

When NT=1, the IRET instruction causes a return to the task that called the current one via CALL or INT instruction.

Access to TSS and task gate descriptors is restricted by the rules privilege level. The data access rules are used, thereby allowing task switches to be restricted to programs of sufficient privilege. Address space separation does not apply to TSS descriptors since they must be in the GDT. The access rules for interrupts are discussed in section 9.4.

For JMP or CALL instructions that reference a TSS descriptor or task gate, the effective privilege level of the destination selector (i.e., the numeric maximum of the selector's RPL and current CPL) must be less than or equal to the descriptor DPL. If it is not, a general protection fault will occur with an error code identifying the descriptor.

Once access to the TSS has been granted, the task switch operation involves five steps:

1. Checking that the current task is allowed to switch to the designated task: Data access privilege rules are applied for the JMP/CALL cases. The current task becomes the outgoing task.
2. Checking that the new task is present and has a proper TSS limit: The new task becomes the incoming task. All errors up to this point are handled in the context of the outgoing task. The errors are restartable and error handling is transparent to the application program.
3. Saving the state of the outgoing task: The outgoing TSS selector is in the TR. The dynamic portion of the outgoing TSS is written with the corresponding CPU

register values (e.g., AX, BX, CX, DX, SI, DI, BP, SP, ES, DS, SS, CS, IP, and flag register). The IP value points at the instruction following the one which caused the task switch.

4. Load TR with the incoming task selector, mark the incoming task's descriptor as busy, and set TS.
5. Load the incoming task state and resume execution: The following registers are loaded: LDT, AX, BX, CX, DX, SI, DI, BP, SP, ES, DS, SS, CS, IP, and flag register. Any errors detected in this step are handled in the context of the incoming task. It will appear as if the first instruction of the new task had not yet executed.

Note that the state of the outgoing task is always saved. If execution of that task is resumed, it will start after the instruction that caused the task switch. The values of the registers will be the same as that when the task stopped running.

Any task switch sets the Task Switched (TS) bit in the Machine Status Word (MSW). This flag is used when processor extensions such as the 80287 Numeric Processor Extension are present. The TS bit signals that the context of the processor extension may not belong to the current iAPX 286 task. Chapter 11 discusses the TS bit and processor extensions in more detail.

The checks in table 8-1 are made during the task switch. All the requirements shown in the table must be satisfied for the task switch to occur without an exception. For each check, the type of exception and error code are described. Up to and including step 3, the exception occurs in the context of the outgoing task. After step 3, the incoming task is considered valid. All exceptions occur in the context of the incoming task.

TASKS AND STATE TRANSITIONS

Table 8-1. Checks Made During a Task Switch

| Step | Test | Exception* | Error Code |
|---|---|-------------|------------------------|
| 1 | Incoming TSS descriptor is present | NP | Incoming TSS selector |
| 2 | Incoming TSS is idle | GP | Incoming TSS selector |
| 3 | Limit of incoming TSS greater than 43 | Invalid TSS | Incoming TSS selector |
| *** All register and selector values are loaded *** | | | |
| 4 | LDT selector of incoming TSS is valid | Invalid TSS | Incoming TSS selector |
| 5 | LDT of incoming TSS is present | Invalid TSS | Incoming TSS selector |
| 6 | CS selector is valid | Invalid TSS | Code segment selector |
| 7 | Code segment is present | NP | Code segment selector |
| 8 | Code segment DPL matches CS RPL | Invalid TSS | Code segment selector |
| 9 | Stack segment is valid | SF | Stack segment selector |
| 10 | Stack segment is writable data segment | GP | Stack segment selector |
| 11 | Stack segment is present | SF | Stack segment selector |
| 12 | Stack segment DPL = CPL | SF | Stack segment selector |
| 13 | DS/ES selectors are valid | GP | Segment selector |
| 14 | DS/ES segments are readable | GP | Segment selector |
| 15 | DS/ES segments are present | NP | Segment selector |
| 16 | DS/ES segment DPL \geq CPL if not conform | GP | Segment selector |

*NP = Not-Present Exception
 GP = General Protection Fault
 SF = Stack Fault

Validity tests on a selector ensure that the selector is in the proper table (i.e., the LDT selector refers to GDT), lies within the bounds of the table, and refers to the proper type of descriptor (i.e., the LDT selector refers to the LDT descriptor).

Note that between steps 3 and 4 in table 8-1, all the registers of the new task are loaded. Several protection rule violations may exist in the new segment register contents. If an exception occurs in the context of the new task due to checks performed on the newly loaded descriptors, the DS and ES segments may not be accessible even though the segment registers contain non-zero values. These selector values must be saved for later reuse. When the exception handler reloads these segment registers, another protection exception may occur unless the exception handler pre-examines them and fixes any potential problems.

A task switch allows flexibility in the privilege level of the outgoing and incoming tasks. The privilege level at which execution resumes in the incoming task is not restricted by the privilege level of the outgoing task. This is reasonable, since both tasks are isolated from each other with separate address spaces and machine states. The privilege rules prevent improper access to a TSS. The only interaction between the tasks is to the extent that one started the other and the incoming task may restart the outgoing task by executing an IRET instruction.

8.4 TASK LINKING

The TSS has a field called "back link" which contains the selector of the TSS of a task that should be restarted when the current task completes. The back link field of an interrupt-initiated task is automatically written with the TSS selector of the interrupted task.

A task switch initiated by a CALL instruction also points the back link at the outgoing task's TSS. Such task nesting is indicated to programs via the Nested Task (NT) bit in the flag word of the incoming task.

Task nesting is necessary for interrupt functions to be processed as separate tasks. The interrupt function is thereby isolated from all other tasks in the system. To restart the interrupted task, the interrupt handler executes an IRET instruction much in the same manner as an iAPX 86 interrupt handler. The IRET instruction will then cause a task switch to the interrupted task.

Completion of a task occurs when the IRET instruction is executed with the NT bit in the flag word set. The NT bit is automatically set/reset by task switch operations as appropriate. Executing an IRET instruction with NT cleared causes the normal iAPX 86 interrupt return function to be performed, and no task switch occurs.

Executing IRET with NT set causes a task switch to the task defined by the back link field of the current TSS. The selector value is fetched and verified as pointing to a valid, accessible TSS. The normal task switch operation described in section 8.3 then occurs.

After the task switch is complete, the outgoing task is now idle and considered ready to process another interrupt.

Table 8-2 shows how the busy bit, NT bit, and link word of the incoming and outgoing task are affected by task switch operations caused by JMP, CALL, or IRET instructions.

Violation of any of the busy bit requirements shown in table 8-2 causes a general protection fault with the saved machine state appearing as if the instruction had not executed. The error code identifies the selector of the TSS with the busy bit.

A bus lock is applied during the testing and setting of the TSS descriptor busy bit to ensure that two processors do not invoke the same task at the same time. See also section 11.4 for other multi-processor considerations.

The linking order of tasks may need to be changed to restart an interrupted task before the task that interrupted it completes. To remove a task from the list, trusted operating system software must change the backlink field in the TSS of the interrupting task first, then clear the busy bit in the TSS descriptor of the task removed from the list.

Table 8-2. Effect of a Task Switch on BUSY and NT Bits and the Link Word

| Affected Field | JMP Instruction Effect | CALL/INT Instruction Effect | IRET Instruction Effect |
|--|------------------------------|-----------------------------------|-------------------------------|
| Busy bit of incoming task TSS descriptor | Set, must be 0 before | Set, must be 0 before | Unchanged, must be set |
| Busy bit of outgoing task TSS descriptor | Cleared | Unchanged (will already be 1) | Cleared |
| NT bit in incoming task flag word | Cleared | Set | Unchanged |
| NT bit in outgoing task flag word | Unchanged | Unchanged | Cleared |
| Back link in incoming task TSS | Unchanged | Set to outgoing task TSS selector | Unchanged |
| Back link of outgoing task TSS | Unchanged | Unchanged | Unchanged |

When trusted software deletes the link from one task to another, it should place a value in the backlink field, which will pass control to that trusted software when the task attempts to resume execution of another task via IRET.

8.5 TASK GATES

A task may be invoked by several different events. Task gates are provided to support this need. Task gates are used in the same way as call and interrupt gates. The ultimate effect of jumping to or calling a task gate is the same as jumping to or calling directly to the TSS in the task gate.

Figure 8-3 depicts the layout of a task gate.

A task gate is identified by the access byte field in bits 0 through 4 being 00101. The gate provides an extra level of indirection between the destination address and the TSS selector value. The offset portion of the JMP or CALL destination address is ignored.

Gate use provides flexibility in controlling access to tasks. Task gates can appear in the

GDT, IDT, or LDT. The TSS descriptors for all tasks must be kept in the GDT. They are normally placed at level 0 to prevent any task from improperly invoking another task. Task gates placed in the LDT allow private access to selected tasks with full privilege control.

The data segment access rules apply to accessing a task gate via JMP, CALL, or INT instructions. The effective privilege level (EPL) of the destination selector must be numerically less than or equal to the DPL of the task gate descriptor. Any violation of this requirement causes a general protection fault with an error code identifying the task gate involved.

Once access to the task gate has been verified, the TSS selector from the gate is read. The RPL of the TSS selector is ignored. From this point, all the checks and actions performed for a JMP or CALL to a TSS after access has been verified are performed (see section 8.4). Figure 8-4 illustrates an example of a task switch through a task gate.

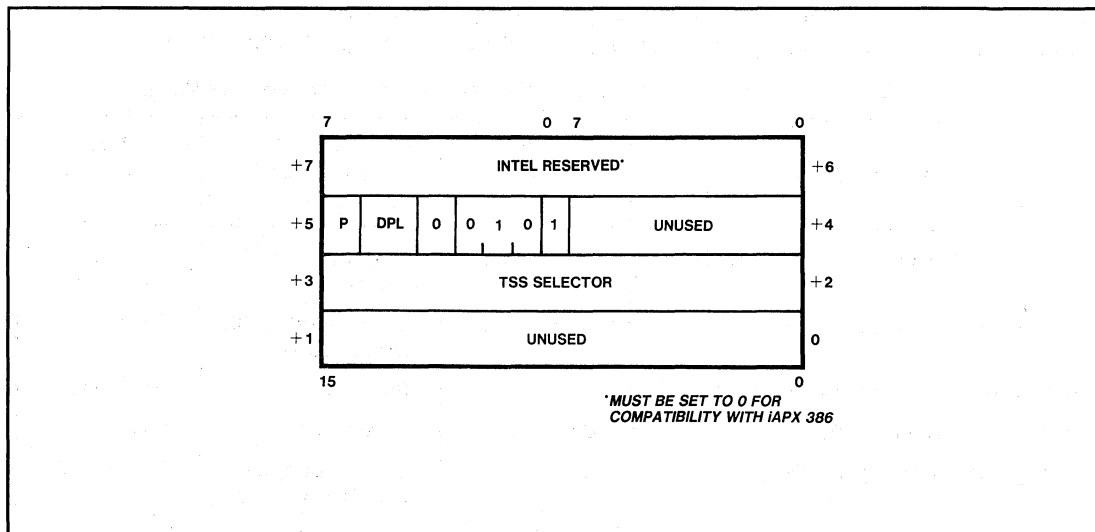


Figure 8-3. Task Gate Descriptor

TASKS AND STATE TRANSITIONS

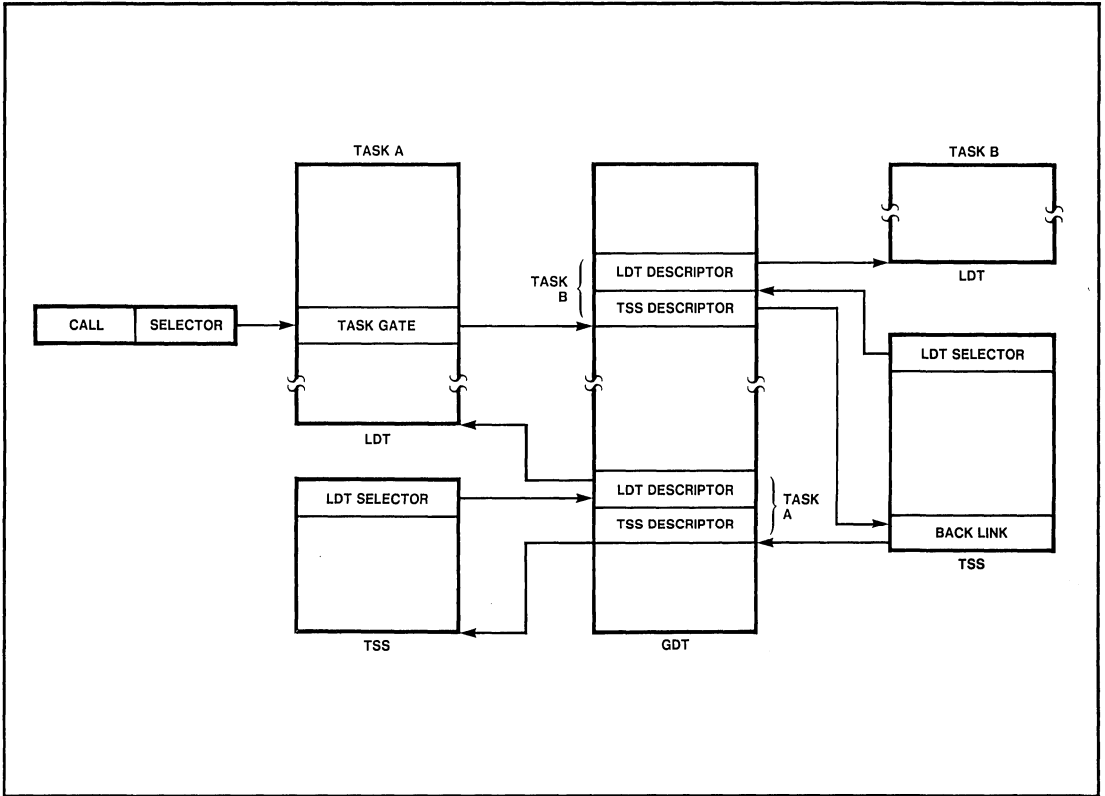


Figure 8-4. Task Switch Through a Task Gate

CHAPTER 9

INTERRUPTS AND EXCEPTIONS

Interrupts and exceptions are special cases of control transfer within a program. An interrupt occurs as a result of an event that is independent of the currently executing program, while exceptions are a direct result of the program currently being executed. Interrupts may be external or internal. External interrupts are generated by either the INTR or NMI input pins. Internal interrupts are caused by the INT instruction. Exceptions occur when an instruction cannot be completed normally. Although their causes differ, interrupts and exceptions use the same control transfer techniques and privilege rules; therefore, in the following discussions the term interrupt will also apply to exceptions.

The program used to service an interrupt may execute in the context of the task that caused the interrupt (i.e., used the same TSS, LDT, stacks, etc.) or may be a separate task. The choice depends on the function to be performed and the level of isolation required.

9.1 INTERRUPT DESCRIPTOR TABLE

Many different events may cause an interrupt. To allow the reason for an interrupt to be easily identified, each interrupt source is given a number called the interrupt vector. Up to 256 different interrupt vectors (numbers) are possible. See figure 9-1.

A table is used to define the handler for each interrupt vector. The Interrupt Descriptor Table (IDT) defines the interrupt handlers for up to 256 different interrupts. The IDT is in physical memory, pointed to by the contents of the on-chip IDTR register that contains a 24-bit base and a 16-bit limit. The IDTR is normally loaded with the LIDT instruction by code that executes at privilege level 0 during system initialization. The IDT may be located anywhere in the physical address space of the iAPX 286.

Each IDT entry is a 4-word gate descriptor that contains a pointer to the handler. The

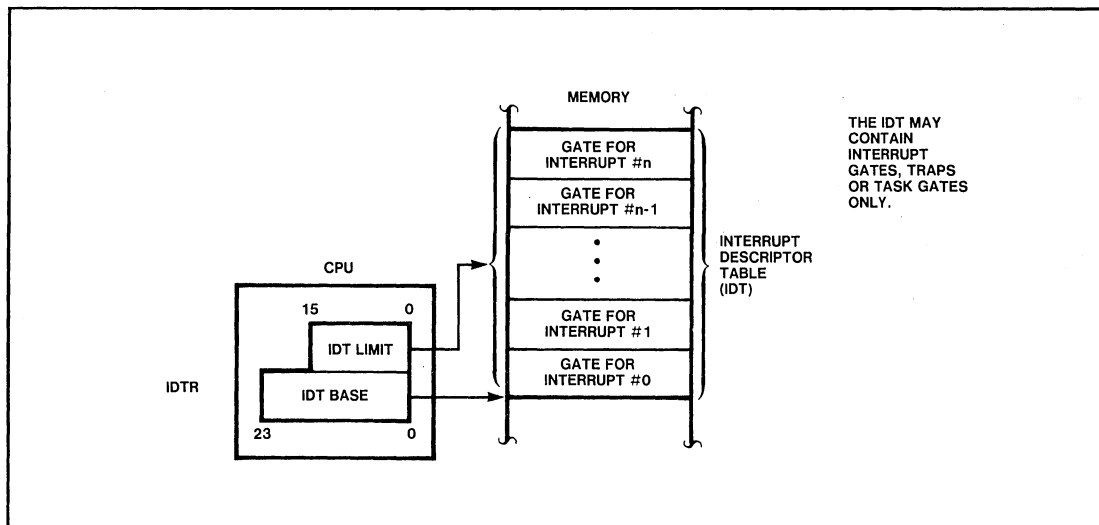


Figure 9-1. Interrupt Descriptor Table Definition

three types of gates permitted in the IDT are interrupt gates, trap gates (discussed in section 9.3), and task gates (discussed in section 9.5). Interrupt and task gates process interrupts in the same task, while task gates cause a task switch. Any other descriptor type in the IDT will cause an exception if it is referenced by an interrupt.

The IDT need not contain all 256 entries. A 16-bit limit register allows less than the full number of entries. Unused entries may be signaled by placing a zero in the access rights byte. If an attempt is made to access an entry outside the table limit, or if the wrong descriptor type is found, a general protection fault occurs with an error code pushed on the stack identifying the invalid interrupt vector (see figure 9-2).

Exception error codes that refer to an IDT entry can be identified by bit 1 of the error code that will be set. Bit 0 of the error code is 1 if the interrupt was caused by an event external to the program (i.e., an external interrupt, a single step, a processor extension error, or a processor extension not present).

Interrupts 0-31 are reserved for use by Intel. Some of the interrupts are used for instruc-

tion exceptions. The IDT limit must be at least $255 (32 \times 8 - 1)$ to accommodate the minimum number of interrupts. The remaining 224 interrupts are available to the user.

9.2 HARDWARE INITIATED INTERRUPTS

Hardware-initiated interrupts are caused by some external event that activates either the INTR or NMI input pins of the processor. Events that use the INTR input are classified as maskable interrupts. Events that use the NMI input are classified as non-maskable interrupts.

All 224 user-defined interrupt sources share the INTR input, but each has the ability to use a separate interrupt handler. An 8-bit vector supplied by the interrupt controller identifies which interrupt is being signaled. To read the interrupt id, the processor performs the interrupt acknowledge bus sequence.

Maskable interrupts (from the INTR input) can be inhibited by software by setting the interrupt flag bit (IF) to 0 in the flag word. The IF bit does not inhibit exceptions or interrupts caused by the INT instruction. The IF bit also does not inhibit processor extension interrupts.

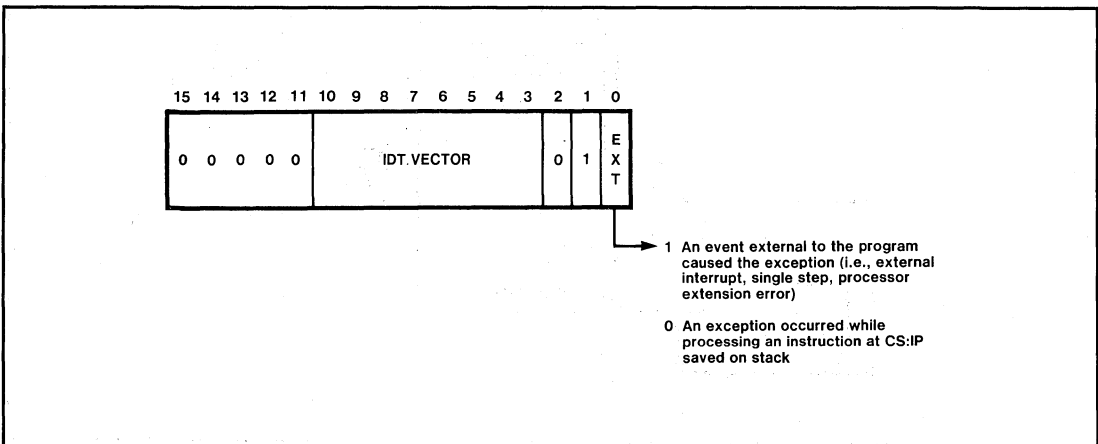


Figure 9-2. IDT Selector Error Code

The type of gate placed into the IDT for the interrupt vector will control whether other maskable interrupts remain enabled or not during the servicing of that interrupt. The flag word that was saved on the stack reflects the maskable interrupt enable status of the processor prior to the interrupt. The procedure servicing a maskable interrupt can also prevent further maskable interrupts during its work by resetting the IF flag.

Non-maskable interrupts are caused by the NMI input. They have a higher priority than the maskable interrupts (meaning that in case of simultaneous requests, the non-maskable interrupt will be serviced first). A non-maskable interrupt has a fixed vector (#2) and therefore does not require an interrupt acknowledge sequence on the bus. A typical use of an NMI is to invoke a procedure to handle a power failure or some other critical hardware exception.

A procedure servicing an NMI will not be further interrupted by other non-maskable interrupt requests until an IRET instruction is executed. A further NMI request is remembered by the hardware and will be serviced after the first IRET instruction. Only one NMI request can be remembered. To prevent a maskable interrupt from interrupting the NMI interrupt handler, the IF flag should be cleared either by using an interrupt gate in the IDT or by setting $IF = 0$ in the flag word of the task involved.

9.3 SOFTWARE INITIATED INTERRUPTS

Software initiated interrupts occur explicitly as interrupt instructions or may arise as the result of an exceptional condition that prevents the continuation of program execution. Software interrupts are not maskable. Two interrupt instructions exist which explicitly cause an interrupt: INT n and INT 3. The first allows specification of any interrupt

vector; the second implies interrupt vector 3 (Breakpoint).

Other instructions like INTO, BOUND, DIV, and IDIV may cause an interrupt, depending on the overflow flag or values of the operands. These instructions have predefined vectors associated with them in the first 32 interrupts reserved by Intel.

A whole class of interrupts called exceptions are intended to detect faults or programming errors (in the use of operands or privilege levels). Exceptions cannot be masked. They also have fixed vectors within the first 32 interrupts. Many of these exceptions pass an error code on the stack, which is not the case with the other interrupt types discussed in section 9.2. Section 9.5 discusses these error codes as well as the priority among interrupts that can occur simultaneously.

9.4 INTERRUPT GATES AND TRAP GATES

Interrupt gates and trap gates are special types of descriptors that may only appear in the interrupt descriptor table. The difference between a trap and an interrupt gate is whether the interrupt enable flag is to be cleared or not. An interrupt gate specifies a procedure that enters with interrupts disabled (i.e., with the interrupt enable flag cleared); entry via a trap gate leaves the interrupt enable status unchanged. The NT flag is always cleared (after the old NT state is saved on the stack) when an interrupt uses these gates. Interrupts that have either gate in the associated IDT entry will be processed in the current task.

Interrupts and trap gates have the same structure as the call gates discussed in section 7.5.1. The selector and entry point for a code segment to handle the interrupt or exception is contained in the gate. See figure 9-3.

INTERRUPTS AND EXCEPTIONS

The access byte contains the Present bit, the descriptor privilege level, and the type identifier. Bits 0-4 of the access byte have a value of 00110 for interrupt gates, 00111 for trap gates. Byte 5 of the descriptor is not used by either of these gates; it is used only by the call gate, which uses it as the parameter word-count.

Trap and interrupt gates allow a privilege level transition to occur when passing control to a non-conforming code segment. Like a call gate, the DPL of the target code segment selected determines the new CPL. The DPL of the new non-conforming code segment must be numerically less than or equal to CPL.

No privilege transition occurs if the new code segment is conforming. If the DPL of the conforming code segment is greater than the CPL, a general protection exception will occur.

As with all descriptors, these gates in the IDT carry a privilege level. The DPL controls access to interrupts with the INT n and INT 3 instructions. For access, the CPL of the program must be less than or equal to the gate DPL. If the CPL is not, a general protection exception will result with an error code

identifying the selected IDT gate. For exceptions and external interrupts, the CPL of the program is ignored while accessing the IDT.

Interrupts using a trap or an interrupt gate are handled in the same manner as an iAPX 86 interrupt. The flags and return address of the interrupted program are saved on the stack of the interrupt handler. To return to the interrupted program, the interrupt handler executes an IRET instruction.

If an increase in privilege is required for handling the interrupt, a new stack will be loaded from the TSS. The stack pointer of the old privilege level will also be saved on the new stack in the same manner as a call gate. Figure 9-4 shows the stack contents after an exception with an error code (with and without a privilege level change).

If an *interrupt* or *trap* gate is used to handle an exception that passes an error code, the error code will be pushed onto the new stack after the return address (as shown in figure 9-4). If a *task* gate is used, the error code is pushed onto the stack of the new task. The return address is saved in the old TSS.

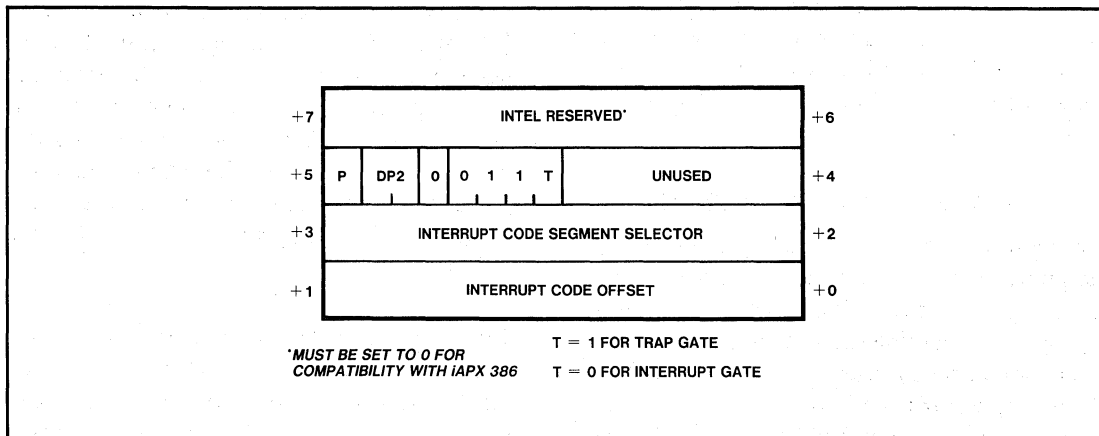


Figure 9-3. Trap/Interrupt Gate Descriptors

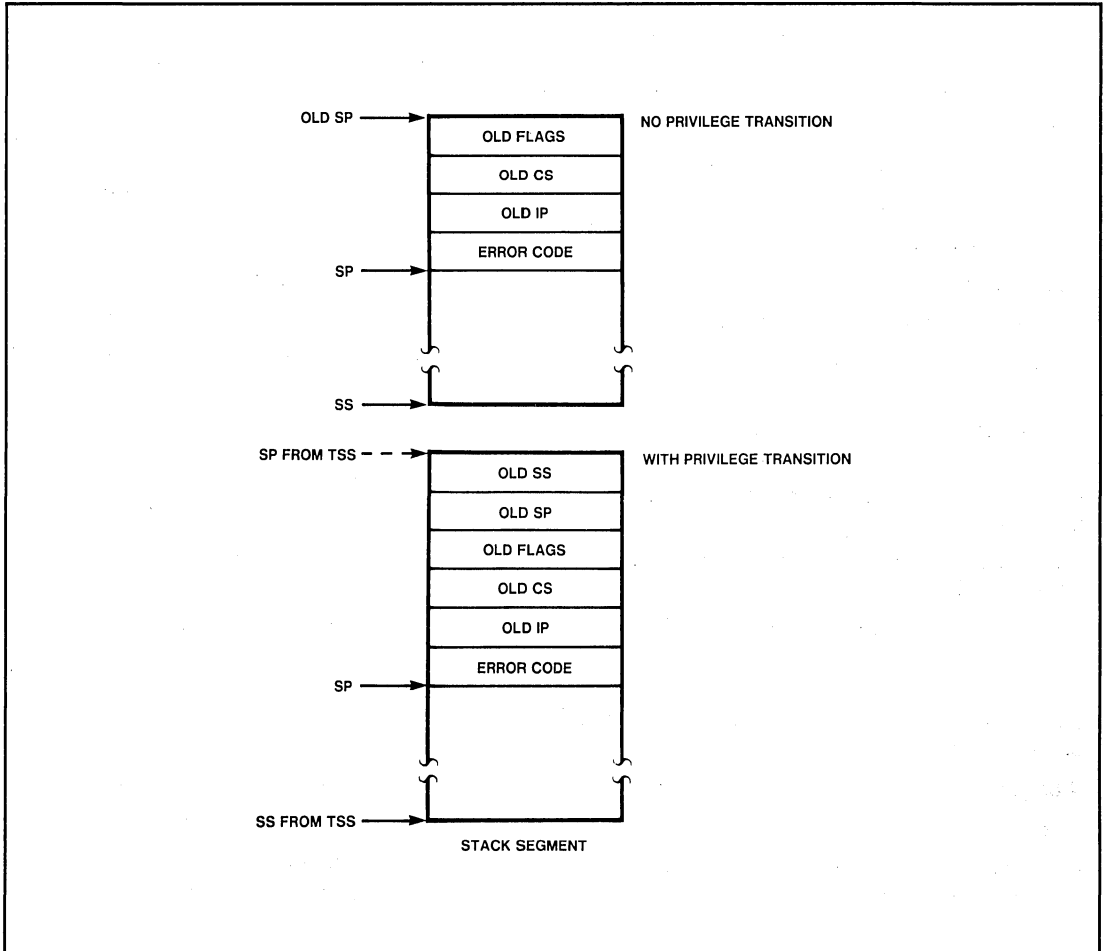


Figure 9-4. Stack Layout After an Exception with an Error Code

If an interrupt gate is used to handle an interrupt, it is assumed that the selected code segment has sufficient privilege to re-enable interrupts. The IRET instruction will not re-enable interrupts if CPL is numerically greater than IOPL.

Table 9-1 shows the checks performed during an interrupt operation that uses an interrupt or trap gate. EXT equals 1 when an event external to the program is involved, 0 otherwise. External events are maskable or non-maskable interrupts, single step interrupt,

processor extension segment overrun interrupt, numeric processor not-present exception or numeric processor error. The EXT bit signals that the interrupt or exception is not related to the instruction at CS:IP. Each error code has bit 1 set to indicate an IDT entry is involved.

When the interrupt has been serviced, the service routine returns control via an IRET instruction to the routine that was interrupted. If an error code was passed, the exception handler must remove the error code from the stack before executing IRET.

INTERRUPTS AND EXCEPTIONS

Table 9-1. Trap and Interrupt Gate Checks

| Check | Exception* | Error Code |
|---|------------|--------------------------------|
| Interrupt vector is in IDT limit | GP | IDT entry \times 8 + 2 + EXT |
| Trap, Interrupt, or Task Gate in IDT Entry | GP | IDT entry \times 8 + 2 + EXT |
| If INT instruction, gate DPL \geq CPL | GP | IDT entry \times 8 + 2 + EXT |
| P bit of gate is set | NP | IDT entry \times 8 + 2 + EXT |
| Code segment selector is in descriptor table limit | GP | IDT entry \times 8 + 2 + EXT |
| CS selector refers to a code segment | GP | IDT entry \times 8 + 2 + EXT |
| If code segment is non-conforming, Code Segment DPL \leq CPL | GP | IDT entry \times 8 + 2 + EXT |
| If code segment is non-conforming, and DPL < CPL and if SS selector in TSS is in descriptor table limit | GP | IDT entry \times 8 + 2 + EXT |
| If code segment is non-conforming, and DPL < CPL and if SS is a writable data segment | GP | IDT entry \times 8 + 2 + EXT |
| If code segment is non-conforming, and DPL < CPL and code segment DPL = stack segment DPL | GP | Stack segment selector + EXT |
| If code segment is non-conforming, and DPL < CPL and if SS is present | SF | Stack segment selector + EXT |
| If code segment is non-conforming, and DPL < CPL and if there is enough space for 5 words on the stack (or 6 if error code is required) | SF | 0 + EXT |
| If code segment is conforming, then DPL \geq CPL | GP | Code segment selector + EXT |
| If code segment is not present | NP | Code segment selector + EXT |
| If IP is not within the limit of code segment | GP | 0 + EXT |

* GP = General Protection Exception
 NP = Not Present Exception
 SF = Stack Fault

The NT flag is cleared when an interrupt occurs which uses an interrupt or trap gate. Executing IRET with NT=0 causes the normal interrupt return function. Executing IRET with NT=1 causes a task switch (see section 8.4 for more details).

Like the RET instruction, IRET is restricted to return to a level of equal or lesser privilege unless a task switch occurs. The IRET instruction works like the inter-segment RET instruction except that the flag word is popped and no stack pointer update for parameters is

performed since no parameters are on the stack. See section 7.5.2 for information on inter-level returns.

To distinguish an inter-level IRET, the new CPL (which is the RPL of the return address CS selector) is compared with the current CPL. If they are the same, the IP and flags are popped and execution continues.

An inter-level return via IRET has all the same checks as shown in table 7-4. The only difference is the extra word on the stack for the old flag word.

Interrupt gates are typically associated with high-priority hardware interrupts for automatically disabling interrupts upon their invocation. Trap gates are typically software-invoked since they do not disable the maskable hardware interrupts. However, low-priority interrupts (e.g., a timer) are often invoked via a trap gate to allow other devices of higher priority to interrupt the handler of that lower priority interrupt.

Table 9-2 illustrates how the interrupt enable flag and interrupt type interact with the type of gate used.

9.5 TASK GATES AND INTERRUPT TASKS

The iAPX 286 allows interrupts to directly cause a task switch. When an interrupt vector selects an entry in the IDT which is a task gate, a task switch occurs. The format of a task gate is described in section 8.5. If a task gate is used to handle an exception that passes an error code, the error code will be pushed onto the new task's stack.

A task gate offers two advantages over interrupt gates:

1. It automatically saves all of the processor registers as part of the task-switch operation whereas an interrupt gate saves only the flag register and CS:IP.

2. The new task is completely isolated from the task that was interrupted. Address spaces are isolated and the interrupt-handling task is unaffected by the privilege level of the interrupted task.

An interrupt task switch works like any other task switch once the TSS selector is fetched from the task gate. Like a trap or an interrupt gate, privilege and presence rules are applied to accessing a task gate during an interrupt.

Interrupts that cause a task switch set the NT bit in the flags of the new task. The TSS selector of the interrupted task is saved in the back link field of the new TSS. The interrupting task executes IRET to perform a task switch to return to the interrupted task because NT was previously set. The interrupt task state is saved in its TSS before returning control to the task that was interrupted; NT is restored to its original value in the interrupted task.

Since the interrupt handler state after executing IRET is saved, a re-entry of the interrupt service task will result in the execution of the instruction that follows IRET. Therefore, when the next interrupt occurs, the machine state will be the same as that when the IRET instruction was executed.

Table 9-2. Interrupt and Gate Interactions

| Type of Interrupt | Type of Gate | Further NMIs? | Further INTRs? | Further Exceptions? | Further software Interrupts? |
|-------------------|--------------|---------------|----------------|---------------------|------------------------------|
| NMI | Trap | No | Yes | Yes | Yes |
| NMI | Interrupt | No | No | Yes | Yes |
| INTR | Trap | Yes | Yes | Yes | Yes |
| INTR | Interrupt | Yes | No | Yes | Yes |
| Software | Trap | Yes | Yes | Yes | Yes |
| Software | Interrupt | Yes | No | Yes | Yes |
| Exception | Trap | Yes | Yes | Yes | Yes |
| Exception | Interrupt | Yes | No | Yes | Yes |

Note that an interrupt task *resumes* execution each time it is re-invoked, whereas an interrupt procedure starts executing at the beginning of the procedure each time. The interrupted task restarts execution at the point of interruption because interrupts occur before the execution of an instruction.

When an interrupt task is used, the task must be concerned with avoiding further interrupts while it is operating. A general protection exception will occur if a task gate referring to a busy TSS is used while processing an interrupt. If subsequent interrupts can occur while the task is executing, the IF bit in the flag word (saved in the TSS) must be zero.

9.5.1 Scheduling Considerations

A software-scheduled operating system must be designed to handle the fact that interrupts can come along in the middle of scheduled tasks and cause a task switch to other tasks. The interrupt-scheduled tasks may call the operating system and eventually the scheduler, which needs to recognize that the task that just called it is not the one the operating system last scheduled.

If the Task Register (TR) does not contain the TSS selector of the last scheduled task, an interrupt initiated task switch has occurred. More than one task may have been interrupt-scheduled since the scheduler last ran. The scheduler must find via the backlink fields in each TSS all tasks that have been interrupted. The scheduler can clear those links and reset the busy bit in the TSS descriptors, putting them back in the scheduling queue for a new analysis of execution priorities. Unless the interrupted tasks are placed back in the scheduling queue, they would have to await a later restart via the task that interrupted them.

To locate tasks that have been interrupt-scheduled, the scheduler looks into the current task's TSS backlink (word one of the TSS),

which points at the interrupted task. If that task was not the last task scheduled, then its backlink field in the TSS also points to an interrupted task.

The backlink field of each interrupt-scheduled task should be set by the scheduler to point to a scheduling task that will reschedule the highest priority task when the interrupt-scheduled task executes IRET.

9.5.2 Deciding Between Task, Trap, and Interrupt Gates

Interrupts and exceptions can be handled with either a trap/interrupt gate or a task gate. The advantages of a task gate are all the registers are saved and a new set is loaded with full isolation between the interrupted task and the interrupt handler. The advantages of a trap/interrupt gate are faster response to an interrupt for simple operations and easy access to pointers in the context of the interrupted task. All interrupt handlers use IRET to resume the interrupted program.

Trap/interrupt gates require that the interrupt handler be able to execute at the same or greater privilege level than the interrupted program. If any program executing at level 0 can be interrupted through a trap/task gate, the interrupt handler must also execute at level 0 to avoid general protection exception. All code, data, and stack segment descriptors must be in the GDT to allow access from any task. But, placing all system interrupt handlers at privilege level 0 may be inconsistent with maintaining the integrity of level 0 programs.

Some exceptions require the use of a task gate. The invalid task state segment exception (#10) can arise from errors in the original TSS as well as in the target TSS. Handling the exception within the same task could lead to recursive interrupts or other undesirable effects that are difficult to trace.

The double fault exception (#8) should also use a task gate to prevent shutdown from another protection violation occurring during the servicing of the exception.

9.6 PROTECTION EXCEPTIONS AND RESERVED VECTORS

A protection violation will cause an exception, i.e., a non-maskable interrupt. Such a fault can be handled by the task that caused it if an interrupt or trap gate is used, or by a different task if a task gate is used (in the IDT).

Protection exceptions can be classified into program errors or implicit requests for service. The latter include stack overflow and not-present faults. Examples of program errors include attempting to write into a read-only segment, or violating segment limits.

Requests for service may use different interrupt vectors, but many diverse types of protection violation use the same general protection fault vector. Table 9-3 shows the reserved exceptions and interrupts. Interrupts 0-31 are reserved by Intel.

When simultaneous external interrupt requests occur, they are processed in the fixed order shown in table 9-4. For each interrupt serviced, the machine state is saved. The new CS:IP is loaded from the gate or TSS. If other interrupts remain enabled, they are processed before the first instruction of the current interrupt handler, i.e., the last interrupt processed is serviced first.

All but two exceptions are restartable after the exceptional condition is removed. The two non-restartable exceptions are the processor extension segment overrun and writing into read only segments with XCHG, ADC, SBB, RCL, and RCR instructions. The return address normally points to the failing instruction, including all leading prefixes.

The instruction and data addresses for the processor extension segment overrun are contained in the processor extension status registers.

Interrupt handlers for most exceptions receive an error code that identifies the selector involved, or a 0 in bits 15-3 of the error code

Table 9-3. Reserved Exceptions and Interrupts

| Vector Number | Description | Restartable | Error Code on Stack |
|---------------|---|-------------|---------------------|
| 0 | Divide Error Exception | Yes | No |
| 1 | Single Step Interrupt | Yes | No |
| 2 | NMI Interrupt | Yes | No |
| 3 | Breakpoint Interrupt | Yes | No |
| 4 | INTO Detected Overflow Exception | Yes | No |
| 5 | BOUND Range Exceeded Exception | Yes | No |
| 6 | Invalid Opcode Exception | Yes | No |
| 7 | Processor Extension Not Available Exception | Yes | No |
| 8 | Double Exception Detected | No | Yes (Always 0) |
| 9 | Processor Extension Segment Overrun Interrupt | No | No |
| 10 | Invalid Task State Segment | Yes | Yes |
| 11 | Segment Not Present | Yes | Yes |
| 12 | Stack Segment Overrun or Not Present | Yes | Yes |
| 13 | General Protection | Yes* | Yes |

* Except for writes into read-only segments (see section 9.6)

Table 9-4. Interrupt Processing Order

| Order | Interrupt |
|-------|-------------------------------------|
| 1 | Instruction exception |
| 2 | Single step |
| 3 | NMI |
| 4 | Processor extension segment overrun |
| 5 | INTR |

field if there is no selector involved. The error code is pushed last, after the return address, on the stack that will be active when the trap handler begins execution. This ensures that the handler will not have to access another stack segment to find the error code.

The following sections describe the exceptions in greater detail.

9.6.1 Invalid OP-Code (Interrupt 6)

When an invalid opcode is detected by the execution unit, interrupt 6 is invoked. (It is not detected until an attempt is made to execute it, i.e., prefetching an invalid opcode does not cause this exception.) The saved CS:IP will point to the invalid opcode or any leading prefixes; no error code is pushed on the stack. The exception can be handled within the same task, and is restartable.

This exception will occur for all cases of an invalid operand. Examples include an intersegment jump referencing a register operand, or an LES instruction with a register source operand. This exception can also occur because redundant prefixes have been placed before an instruction so that the total length of the instruction exceeds 10 bytes.

9.6.2 Double Fault (Interrupt 8)

If two separate protection violations occur during a single instruction, exception 8 (Double Fault) occurs (e.g., a general protection fault in level 3 is followed by a not-present fault due to a segment not-present).

If another protection violation occurs during the processing of exception 8, the iAPX 286 enters shutdown, during which time no further instructions or exceptions are processed.

Either NMI or RESET can force the CPU out of shutdown. An NMI input can bring the CPU out of shutdown if no errors occur while processing the NMI interrupt; otherwise, shutdown can only be exited via the RESET input. NMI causes the CPU to remain in protected mode, and RESET causes it to exit protected mode. Shutdown is signaled externally via a HALT bus operation with A1 LOW.

A task gate must be used for the double fault handler to assure a proper task state to respond to the exception. The back link field in the current TSS will identify the TSS of the task causing the exception. The saved address will point at the instruction that was being executed (or was ready to execute) when the error was detected. The error code will be null.

9.6.3 Processor Extension Segment Overrun (Interrupt 9)

Interrupt 9 signals that the processor extension (such as the 80287 numerics processor) has overrun the limit of a segment while attempting to read/write the second or subsequent words of an operand. The interrupt is generated by the processor extension data channel within the 80286 during the limit test performed on each transfer of data between memory and the processor extension. This interrupt can be handled in the same task but is not restartable.

As with all external interrupts, Interrupt 9 is an asynchronous demand caused by the processor extension referencing something outside a segment boundary. Since Interrupt 9 can occur any time after the processor extension is started, the 80286 does not save

any information that identifies what particular operation had been initiated in the processor extension. The processor extension maintains special registers that identify the last instruction it executed and the address of the desired operand.

After this interrupt occurs, no WAIT or escape instruction, except FNINIT, can be executed until the interrupt condition is cleared or the processor extension is reset. The interrupt signals that the processor extension is requesting an invalid data transfer. The processor extension will always be busy when waiting on data. Deadlock results if the CPU executes an instruction that causes it to wait for the processor extension before resetting the processor extension. Deadlock means the CPU is waiting for the processor extension to become idle while the processor extension waits for the CPU to service its data request.

The FNINIT instruction is guaranteed to reset the processor extension without causing deadlock. After the interrupt is cleared, this restriction is lifted. It is then possible to read the instruction and operand address via

FSTENV or FSAVE, causing the segment overrun in the processor extension's special registers.

The task interrupted by interrupt 9 is not necessarily the task that executed the ESC instruction that caused the interrupt. The operating system should keep track of which task last used the NPX (see section 11.4). If the interrupted task did not execute the ESC instruction, it can be restarted. The task that executed the ESC instruction cannot.

9.6.4 Invalid Task State Segment (Interrupt 10)

Interrupt 10 is invoked if during a task switch the new TSS pointed to by the task gate is invalid. The EXT bit indicates whether the exception was caused by an event outside the control of the program.

A TSS is considered invalid in the cases shown in table 9-5.

Once the existence of the new TSS is verified, the task switch is considered complete, with

Table 9-5. Conditions That Invalidate the TSS

| Reason | Error Code |
|--|----------------|
| The limit in the TSS descriptor is less than 43 | TSS id + EXT |
| Invalid LDT selector or LDT not present | LDT id + EXT |
| Stack segment selector is outside table limit | SS id + EXT |
| Stack segment is not a writable segment | SS id + EXT |
| Stack segment DPL does not match new CPL | SS id + EXT |
| Stack segment selector RPL ≠ CPL | SS id + EXT |
| Code segment selector is outside table limit | CS id + EXT |
| Code segment selector does not refer to code segment | CS id + EXT |
| Non-conforming code segment DPL ≠ CPL | CS id + EXT |
| Conforming code segment DPL > CPL | CS id + EXT |
| DS or ES segment selector is outside table limits | ES/DS id + EXT |
| DS or ES are not readable segments | ES/DS id + EXT |

the backlink set to the old task if necessary. All errors are handled in the context of the new task.

Exception 10 must use a task gate to insure a proper TSS to process it.

9.6.5 Not Present (Interrupt 11)

Exception 11 occurs when an attempt is made to load a not-present segment or to use a control descriptor that is marked not-present. (If, however, the missing segment is an LDT that is needed in a task switch, exception 10 occurs.) This exception is fully restartable.

Any segment load instruction can cause this exception. Interrupt 11 is always processed in the context of the task in which it occurs.

The error code has the form shown in figure 9-5. The EXT bit will be set if an event external to the program caused an interrupt that subsequently referenced a not-present segment. Bit 1 will be set if the error code refers to an IDT entry, e.g., an INT instruction referencing a not-present gate. The upper 14 bits are the upper 14 bits of the segment selector involved.

When a not-present exception occurs, the ES and DS segment registers may not be usable for referencing memory. During a task switch, the selector values are loaded before the descriptors are checked. The not-present handler should not rely on being able to use the values found in CS, ES, SS, and DS without causing another exception.

9.6.6 Stack Fault (Interrupt 12)

Stack underflow or overflow causes exception 12, as does a not-present stack segment referenced during an inter-task or inter-level transition. This exception is fully restartable. A limit violation of the current stack results in an error code of 0. The EXT bit of the error

code tells whether an interrupt external to the program caused the exception.

Any instruction that loads a selector to SS (e.g., POP SS, task switch) can cause this exception. This exception must use a task gate if there is a possibility that any level 0 stack may not be present.

When a stack fault occurs, the ES and DS segment registers may not be usable for referencing memory. During a task switch, the selector values are loaded before the descriptors are checked. The stack fault handler should check the saved values of SS, CS, DS, and ES to be sure that they refer to present segments before restoring them.

9.6.7 General Protection Fault (Interrupt 13)

If a protection violation occurs which is not covered in the preceding paragraphs, it is classed as Interrupt 13, a general protection fault. The error code is zero for limit violations, write to read-only segment violations, and accesses relative to DS or ES when they are zero or refer to a segment at a greater privilege level than CPL. Other access violations (e.g., a wrong descriptor type) push a non-zero error code that identifies the selector used on the stack. Error codes with bit 0 cleared and bits 15-2 non-zero indicate a restartable condition.

Bit 1 of the error code identifies whether the selector is in the IDT or LDT/GDT. If bit 1=0 then bit 2 separates LDT from GDT. Bit 0 (EXT) indicates whether the exception was caused by the program or an event external to it (i.e., single stepping, an external interrupt, a processor extension not-present or a segment overrun). If bit 0 is set, the selector typically has nothing to do with the instruction that was interrupted. The selector refers instead to some step of servicing an interrupt that failed.

When bit 0 of the error code is set, the interrupted program can be restarted, except for processor extension segment overrun exceptions (see section 9.6.3). The exception with the bit 0 of the error code = 1 indicates some interrupt has been lost due to a fault in the descriptor pointed to by the error code.

A non-zero error code with bit 0 cleared may be an operand of the interrupted instruction, an operand from a gate referenced by the instruction, or a field from the invalid TSS.

In Real Address Mode, Interrupt 13 will occur if software attempts to read or write a 16-bit word at segment offset 0FFFFH.

9.7 ADDITIONAL EXCEPTIONS AND INTERRUPTS

Interrupts 0, 5, and 1 have not yet been discussed. Interrupt 0 is the divide-error exception, Interrupt 5 the bound-range exceeded exceptions, and Interrupt 1 the single step interrupt. The divide-error or bound-range exceptions make it appear as if that instruction had never executed: the registers are restored and the instruction can be restarted. The divide-error exception occurs during a DIV or an IDIV instruction when the quotient will be too large to be representable, or when the divisor is zero.

Interrupt 5 occurs when a value exceeds the limit set for it. A program can use the BOUND instruction to check a signed array index against signed limits defined in a two-word block of memory. The block can be located just before the array to simplify addressing. The block's first word specifies the array's lower limit, the second word specifies the array's upper limit, and a register specifies the array index to be tested.

9.7.1 Single Step Interrupt (Interrupt 1)

Interrupt 1 allows programs to execute one instruction at a time. This single-stepping is controlled by the TF bit in the flag word. Once this bit is set, an internal single step interrupt will occur after the next instruction has been executed. The interrupt saves the flags and return address on the stack, clears the TF bit, and uses an internally supplied vector of 1 to transfer control to the service routine via the IDT.

The IRET instruction or a task switch must be used to set the TF bit and to transfer control to the next instruction to be single stepped. If TF=1 in a TSS and that task is invoked, it will execute the first instruction and then be interrupted.

The single-step flag is normally not cleared by privilege changes inside a task. INT instructions, however, do clear TF. Therefore, software debuggers that single-step code must recognize and emulate INT n or INT 0 rather than executing them directly. System software should check the current execution privilege level after any single step interrupt to see whether single stepping should continue.

The interrupt priorities in hardware guarantee that if an external interrupt occurs, single stepping stops. When both an external interrupt and a single step interrupt occur together, the single step interrupt is processed first. This clears the TF bit. After saving the return address or switching tasks, the external interrupt input is examined before the first instruction of the single step handler executes. If the external interrupt is still pending, it is then serviced. The external interrupt handler is not single-stepped. Therefore, to single step an interrupt handler, just single step an interrupt instruction that refers to the interrupt handler.

*System Control And
Initialization*

10

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5800 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

RECEIVED
JAN 15 1964

1

CHAPTER 10

SYSTEM CONTROL AND INITIALIZATION

Special flags, registers, and instructions provide control of the critical processes and interaction in iAPX 286 operations. The flag register includes 3 bits that represent the current I/O privilege level (IOPL: 2 bits) and the nested task bit (NT). Four additional registers support the virtual addressing and memory protection features, one points to the current Task State Segment and the other three point to the memory-based descriptor tables: GDT, LDT, and IDT. These flags and registers are discussed in the next section. The machine status word, (which indicates processor configuration and status) and the instructions that load and store it are discussed in section 10.2.2.

Similar instructions pertaining to the other registers are the subject of sections 10.2 and 10.3. A detailed description of initialization states and processes, which appears in section 10.4, is supplemented by the extensive example in Appendix A. Instructions that validate descriptors and pointers are covered in section 11.3.

10.1 SYSTEM FLAGS AND REGISTERS

The IOPL flag (bits 12 and 13 of the flags word) controls access to I/O operations and interrupt control instructions. These two bits represent the maximum privilege level (highest numerical CPL) at which the task is permitted to perform I/O instructions. Alteration of the IOPL flags is restricted to programs at level 0 or to a task switch.

IRET uses the NT flag to select the proper return: if NT=0, the normal return within a task is performed. As discussed in Chapter 8, the nested task flag (bit 14 of flags) is set when a task initiates a task switch via a

when a task initiates a task switch via a CALL or INT instruction. The old and new task state segments are marked busy and the backlink field of the new TSS is set to the old TSS selector. An interrupt that does not cause a task switch will clear NT after the old NT state is saved. To prevent a program from causing an illegal task switch by setting NT and then executing IRET, a zero selector should be placed in the backlink field of the TSS. An illegal task switch using IRET will then cause exception 13. The instructions POPF and IRET can also set or clear NT when flags are restored from the stack. POPF and IRET can also change the interrupt enable flag. If $CPL \leq IOPL$, then the Interrupt Flag (IF) can be changed by POPF and IRET. Otherwise, the state of the IF bit in the new flag word is ignored by these instructions. Note that the CLI and STI instructions are valid only when $CPL \leq IOPL$; otherwise exception 13 occurs.

10.1.1 Descriptor Table Registers

The three descriptor tables used for all memory accesses are based at addresses supplied by (stored in) three registers: the global descriptor table register (GDTR), the interrupt descriptor table register (IDTR), and the local descriptor table register (LDTR). Each register contains a 24-bit base field and a 16-bit limit field. The base field gives the real memory address of the beginning of the table; the limit field tells the maximum offset permitted in accessing table entries. See figures 10-1 thru 10-3.

The LDTR also contains a selector field that identifies the descriptor for that table. LDT descriptors must reside in the GDT.

The task register (TR) points to the task state segment for the currently active task. It is

SYSTEM CONTROL AND INITIALIZATION

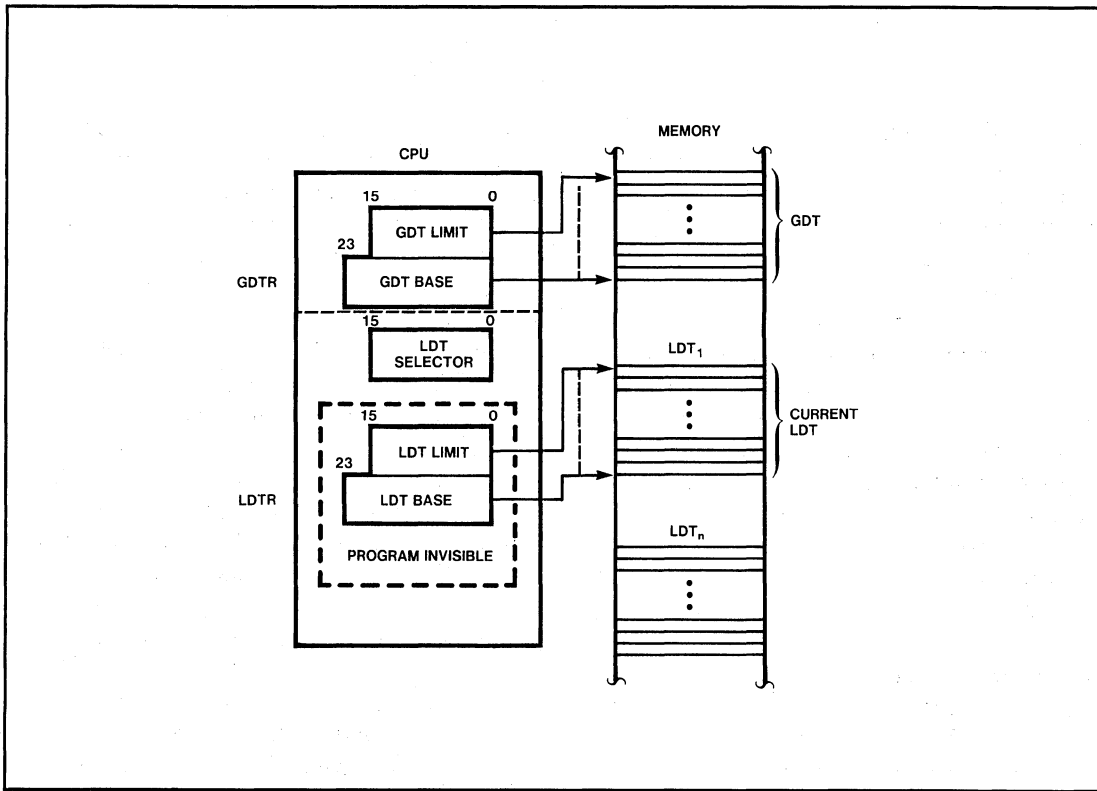


Figure 10-1. Local and Global Descriptor Table Definition

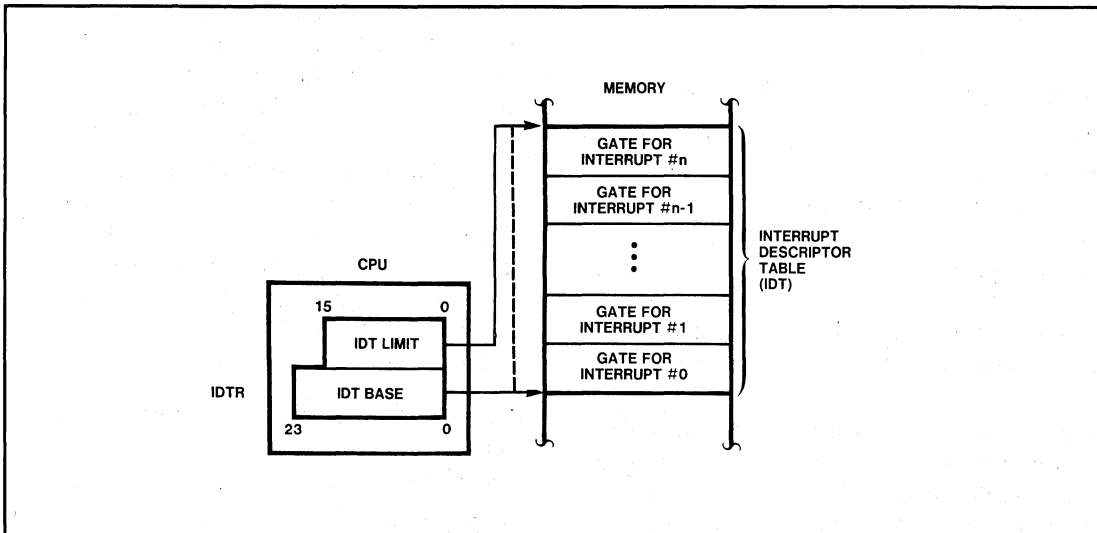


Figure 10-2. Interrupt Descriptor Table Definition

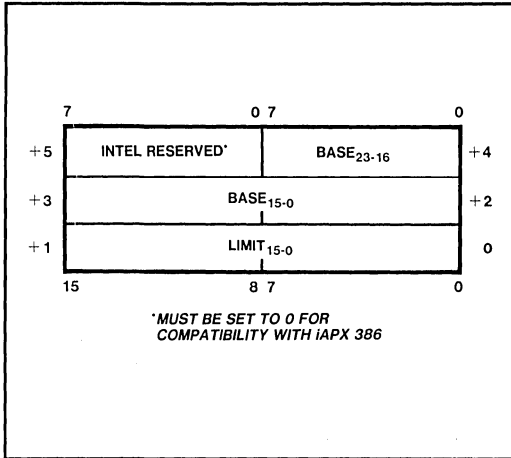


Figure 10-3. Data Type for Global Descriptor Table and Interrupt Descriptor Table

similar to a segment register, with selector, base, and limit fields, of which only the selector field is readable under normal circumstances. Each such selector serves as a unique identifier for its task. The uses of the TR are described in Chapter 8.

The instructions controlling these special registers are described in the next section.

10.2 SYSTEM CONTROL INSTRUCTIONS

The instructions that load the GDTR and IDTR from memory can only be executed in real address mode or at privilege level 0; otherwise exception 13 occurs. The store instructions for GDTR and IDTR may be executed at any privilege level. The four instructions are LIDT, LGDT, SIDT, and SGDT. The instructions move 3 words between the indicated descriptor table register and the effective real memory address supplied (see figure 10-3). The format of the 3 words is: a 2-byte limit, a 3-byte real base address, followed by an unused byte. These instructions are normally used during system initialization.

The LLDT instruction loads the LDT registers from a descriptor in the GDT. LLDT uses

a selector operand to that descriptor rather than referencing the descriptor directly. LLDT is only executable at privilege level 0; otherwise exception 13 occurs. LLDT is normally required only during system initialization because the processor automatically exchanges the LDTR contents as part of the task-switch operation.

Executing an LLDT instruction does not automatically update the TSS or the register caches. To properly change the LDT of the currently running task so that the change holds across task switches, you must perform, in order, the following three steps:

1. Store the new LDT selector into the appropriate word of TSS.
2. Load the new LDT selector into LDTR.
3. Reload the DS and ES registers if they refer to LDT-based descriptors.

Note that the current code segment and stack segment descriptors should reside in the GDT or be copied to the same location in the new LDT.

SLDT (store LDT) can be executed at any privilege level. SLDT stores the local descriptor table selector from the program visible portion of the LDTR register.

Task Register loading or storing is again similar to that of the LDT. The LTR instruction, operating only at level 0, loads the LTR at initialization time with a selector for the initial TSS. LTR does NOT cause a task switch; it just changes the current TSS. Note that the busy bit of the old TSS descriptor is not changed while the busy bit of the new TSS selector must be zero and will be set by LTR. The LDT and any segment registers referring to the old LDT should be reloaded. STR, which permits the storing of TR contents into memory, can be executed at any privilege

level. LTR is not usually needed after initialization because the TR is managed by the task-switch operation.

10.2.2 Machine Status Word

The Machine Status Word (MSW) indicates the iAPX 286 configuration and status. It is not part of a task's state. The MSW word is loaded by the LMSW instruction executed in real address mode or at privilege level 0 only, or is stored by the SMSW instruction executing at any privilege level. MSW is a 16-bit register, the lower four bits of which are used by the iAPX 286. These bits have the meanings shown in table 10-1. Bits 15-4 of the MSW will be used by the iAPX 386. iAPX 286 software should not change these bits. If the bits are changed by the 286

software, compatibility with the iAPX 386 will be destroyed.

The TS flag is set under hardware control and reset under software control. Once the TS flag is set, the next instruction using a processor extension causes a processor extension not-present exception (#7). This feature allows software to test whether the current processor extension state belongs to the current task as discussed in section 11.4. If the current processor extension state belongs to a different task, the software can save the state of any processor extension with the state of the task that uses it. Thus, the TS bit protects a task from processor extension errors that result from the actions of a previous task.

Table 10-1. MSW Bit Functions

| Bit Position | Name | Function |
|--------------|------|---|
| 0 | PE | Protected mode enable places the 80286 into protected mode and cannot be cleared except by RESET. |
| 1 | MP | Monitor processor extension allows WAIT instructions to cause a processor extension not-present exception (number 7) if TS is also set. |
| 2 | EM | Emulate processor extension causes a processor extension not-present exception (number 7) on ESC instructions to allow a processor extension to be emulated. |
| 3 | TS | Task switched indicates the next instruction using a processor extension will cause exception 7, allowing software to test whether the current processor extension context belongs to the current task. |

The CLTS instruction is used to reset the TS flag after the exception handler has set up the proper processor extension state. The CLTS instruction can be executed at privilege level 0 only.

The EM flag indicates a processor extension function is to be emulated by software. If EM=1 and MP=0, all ESCAPE instructions will be trapped via the processor extension not-present exception (#7).

MP flag tells whether a processor extension is present. If MP=1 and TS=1, escape and wait instructions will cause exception 7.

The PE flag indicates that the iAPX 286 is in the protected virtual address mode. Once the PE flag is set, it can be cleared only by a reset, which then puts the system in real address mode emulating the 8086.

Table 10-2 shows the recommended usage of the MSW. Other encodings of these bits are not recommended.

Table 10-2. Recommended MSW Encodings for Processor Extension Control

| TS | MP | EM | Recommended Use | Instructions Causing Exception |
|----|----|----|---|--------------------------------|
| 0 | 0 | 0 | Initial encoding after RESET. iAPX 286 operation is identical to iAPX 86, 88. | None |
| 0 | 0 | 1 | No processor extension is available. Software will emulate its function. Wait instructions do not cause exception 7. | ESC |
| 1 | 0 | 1 | No processor extension is available. Software will emulate its function. The current processor extension context may belong to another task. | ESC |
| 0 | 1 | 0 | A processor extension exists. | WAIT (if TS=1) |
| 1 | 1 | 0 | A processor extension exists. The current processor extension context may belong to another task. The exception on WAIT allows software to test for an error pending from a previous processor extension operation. | ESC or WAIT (if TS=1) |

10.2.3 Other Instructions

Instructions that verify or adjust access rights, segment limits, or privilege levels can be used to avoid exceptions or faults that are correctable. Section 10.3 describes such instructions.

10.3 PRIVILEGED AND TRUSTED INSTRUCTIONS

Instructions that execute only at CPL=0 are called “privileged.” An attempt to execute the privileged instructions at any other privilege level causes a general protection exception (#13) with an error code of zero. The privileged instructions manipulate descriptor tables or system registers. Incorrect use of these instructions can produce unrecoverable conditions. Some of these instructions (LGDT, LLDT, and LTR) are discussed in section 10.2.

Other *privileged* instructions are:

- LIDT—Load interrupt descriptor table register
- LMSW—Load machine status word

- CLTS—Clear task switch flag
- HALT—Halt processor execution
- POPF (POP flags) or IRET can change the IF value only if the user is operating at a trusted privilege level. POPF does not change IOPL except at Level 0.

“Trusted” instructions are restricted to execution at a privilege level of $CPL \geq IOPL$. For each task, the operating system defines a privilege level below which these instructions cannot be used. Most of these instructions deal with input/output or interrupt management. The IOPL field in the flag word that holds the privilege level limit can be changed only when CPL=0. The trusted instructions are:

- Input/Output—Block I/O, Input, and Output: IN, INW, OUT, OUTW, INSB, INSW, OUTSB, OUTSW
- Interrupts—Enable Interrupts, Disable Interrupts: STI, CLI
- Other—Lock Prefix

10.4 INITIALIZATION

Whenever the iAPX 286 is initialized or reset, certain registers are set to predefined values. All additional desired initialization must be performed by user software. (See Appendix A for an example of a 286 initialization routine.) RESET forces the iAPX 286 to terminate all execution and local bus activity; no instruction or bus action will occur as long as RESET is active. Execution in real address mode begins after RESET becomes inactive and an internal processing interval (3-4 clocks) occurs. The initial state at reset is:

```

FLAGS = 0002
MSW   = FFF0H
IP    = FFF0H
CS Selector = F000H   CS.base = FF0000H   CS.limit = FFFFH
DS Selector = 0000H   DS.base = 000000H   DS.limit = FFFFH
ES Selector = 0000H   ES.base = 000000H   ES.limit = FFFFH
IDT base = 000000H   IDT.limit = 03FFH
    
```

Two fixed areas of memory are reserved: the system initialization area and the interrupt table area. The system initialization area begins at FFFFF0H (through FFFFFFFH) and the interrupt table area begins at 000000H (through 0003FFH). The interrupt table area is not reserved.

At this point, segment registers are valid and protection bits are set to 0. The iAPX 286 begins operation in real address mode, with PE=0. Maskable interrupts are disabled, and no processor extension is assumed or emulated (EM=MP=0).

DS, ES, and SS are initialized at reset to allow access to the first 64K of memory (exactly as in the 8086). The CS:IP combination specifies a starting address of FFF0H. For real address mode, the four most significant bits are not used, providing the same FFF0H address as the 8086 reset location. Use of (or upgrade to) the protected mode can be supported by a bootstrap loader at the high end of the address space. As

mentioned in Chapter 5, location FFF0H ordinarily contains a JMP instruction whose target is the actual beginning of a system initialization or restart program.

After RESET, CS points to the top 64K bytes in the 16-Mbyte physical address space. Reloading CS register by a control transfer to a different code segment in real address mode will put zeros in the upper 4 bits. Since the initial IP is FFF0H, all of the upper 64K bytes of address space may be used for initialization.

Sections 10.4.1 and 10.4.2 describe the steps needed to initialize the iAPX286 in the real address mode and the protected mode, respectively.

10.4.1 Real Address Mode

1. Allocate a stack.
2. Load programs and data into memory from secondary storage.
3. Initialize external devices and the Interrupt Vector Table.
4. Set registers and MSW bits to desired values.
5. Set FLAG bits to desired values—including the IF bit to enable interrupts—after insuring that a valid interrupt handler exists for each possible interrupt.
6. Execute (usually via an inter-segment JMP to the main system program).

10.4.2 Protected Mode

The full iAPX 286 virtual address mode initialization procedure requires additional steps to operate correctly:

1. Load programs and associated descriptor tables.

2. Load valid GDT and IDT descriptor tables, setting the GDTR and IDTR to their correct value.
3. Set the PE bit to enter protected mode.
4. Execute an intra-segment JMP to clear the processor queues.
5. Load or construct a valid task state segment for the initial task to be executed in protected mode.
6. Load the LDTR selector from the task's GDT or 0000H (null) if an LDT is not needed.
7. Set the stack pointer (SS, SP) to a valid location in a valid stack segment.
8. Mark all items not in memory as not-present.
9. Set FLAGS and MSW bits to correct values for the desired system configuration.
10. Initialize external devices.
11. Ensure that a valid interrupt handler exists for each possible interrupt.

12. Enable interrupts.
13. Execute.

The example in Appendix A shows the steps necessary to load all the required tables and registers that permit execution of the first task of a protected mode system. The program in Appendix A assumes that Intel development tools have been used to construct a prototype GDT, IDT, LDT, TSS, and all the data segments necessary to start up that first task. Typically, these items are stored on EPROM; on most systems it is necessary to copy them all into RAM to get going. Otherwise, the iAPX 286 will attempt to write into the EPROM to set the accessed or busy bits.

The example in Appendix A also illustrates the ability to allocate unused entries in descriptor tables to grow the tables dynamically during execution. Using suitable naming conventions, the builder can allocate alias data segments that are larger than the prototype EPROM version. The code in the example will zero out the extra entries to permit later dynamic usage.

CHAPTER 11

ADVANCED TOPICS

This chapter describes some of the advanced topics as virtual memory management, restartable instructions, special segment attributes, and the validation of descriptors and pointers.

11.1 VIRTUAL MEMORY MANAGEMENT

When access to a segment is requested and the access byte in its descriptor indicates the segment is not present in real memory, the not-present fault occurs (exception 11, or 12 for stacks). The handler for this fault can be set up to bring the absent segment into real memory (swapping or overwriting another segment if necessary), or to terminate execution of the requesting program if this is not possible.

The accessed bit (bit 0) of the access byte is provided in both executable and data segment descriptors to support segment usage profiling. Whenever the descriptor is accessed by the iAPX 286 hardware, the A-bit will be set in memory. This applies to selector test instructions (described below) as well as to the loading of a segment register. The reading of the access byte and the restoration of it with the A-bit set is an indivisible operation, i.e., it is performed as a read-modify-write with bus lock. If an operating system develops a profile of segment usage over time, it can recognize segments of low or zero access and choose among these candidates for replacement.

When a not-present segment is brought into real memory, the task that requested access to it can continue its execution because all instructions that load a segment register are restartable.

Not-present exceptions occur only on segment register load operations, gate accesses, and

task switches. The saved instruction pointer refers to the first byte of the violating instruction. All other aspects of the saved machine state are exactly as they were before execution of the violating instruction began. After the fault handler clears up the fault condition and performs an IRET, the program continues to execute. The only external indication of a segment swap is the additional execution time.

11.2 SPECIAL SEGMENT ATTRIBUTES

11.2.1 Conforming Code Segments

Code segments intended for use at potentially different privilege levels need an attribute that permits them to emulate the privilege level of the calling task. Such segments are termed "conforming" segments. Conforming segments are also useful for interrupt-driven error routines that need only be as privileged as the routine that caused the error.

A conforming code segment has bit 2 of its access byte set to 1. This means it can be referenced by a CALL or JMP instruction in a task of equal or lesser privilege, i.e., CPL of the task is numerically greater than or equal to DPL of this segment. CPL does not change when executing the conforming code segment. A conforming segment continues to use the stack from the CPL. This is the only case in which the DPL of a code segment can be numerically less than the CPL. If bit 2 is a 0, the segment is not conforming and can be referenced only by a task of $CPL = DPL$.

Inter-segment Returns that refer to conforming code segments use the RPL field of the code selector of the return address to determine the new CPL. The RPL becomes the new CPL if the conforming code segment $DPL \leq RPL$.

If a conforming segment is readable, it can be read from any privilege level without restriction. This is the only exception to the protection rules. This allows constants to be stored with conforming code. For example, a read-only look-up table can be embedded in a conforming code segment that can be used to convert system-wide logical ID's into character strings that represent those logical entities.

11.2.2 Expand-Down Data Segments

If bit 2 in the access byte of a data segment is 1, the segment is an expand-down segment. All the offsets that reference such a segment must be strictly greater than the segment limit, as opposed to normal data segments (bit 2=0) where all offsets must be less than or equal to the segment limit. Figure 11-1 shows an expand-down segment.

The size of the expand down segment can be changed by changing either the base or the limit. An expand down segment with Limit=0 will have a size of $2^{16}-1$ bytes. With a limit value of FFFFH, the expand down segment will have a size of 0 bytes. In an expand down segment, the base + offset

value should always be greater than the base + limit value. Therefore, a full size segment (2^{16} bytes) can only be obtained by using an expand up segment.

The operating system should check the Expand-Down bit when a protection fault indicates that the limit of a data segment has been reached. If the Expand-Down bit is not set, the operating system should increase the segment limit; if it is set, the limit should be lowered. This supplies more room in either case (assuming the segment is not write-protected, i.e., that bit 1 is not 0). In some cases, if the operating system can ascertain that there is not enough room to expand the data segment to meet the need that caused the fault, it can move the data segment to a region of memory where there is enough room. See figure 11-2.

11.3 POINTER VALIDATION

Pointer validation is an important part of locating programming errors. Pointer validation is necessary for maintaining isolation between the privilege levels. Pointer validation consists of the following steps:

1. Check if the supplier of the pointer is entitled to access the segment.
2. Check if the segment type is appropriate to its intended use.
3. Check if the pointer violates the segment limit.

The iAPX 286 hardware automatically performs checks 2 and 3 during instruction execution, while software must assist in performing the first check. This point is discussed in section 11.3.2. Software can explicitly perform steps 2 and 3 to check for potential violations (rather than causing an exception). The unprivileged instructions LSL, LAR, VERR, and VERW are provided for this purpose.

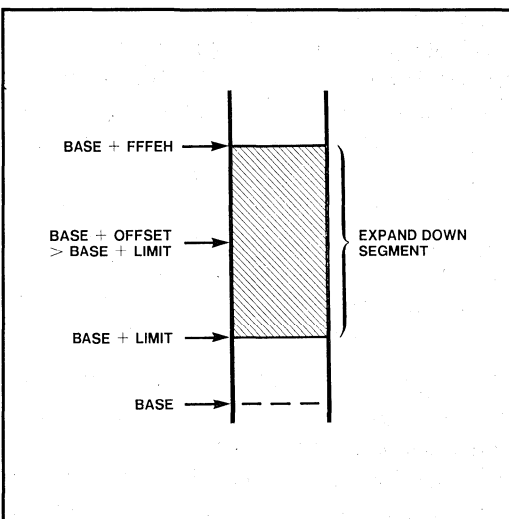


Figure 11-1. Expand-Down Segment

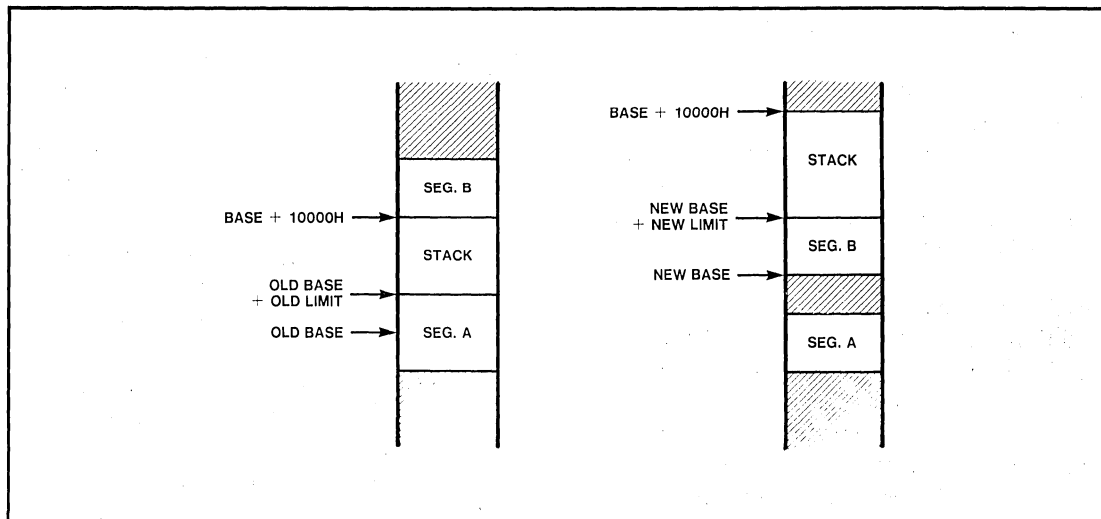


Figure 11-2. Dynamic Segment Relocation and Expansion of Segment Limit

The load access rights (LAR) instruction obtains the access rights byte of a descriptor pointed to by the selector used in the instruction. If that selector is visible at the CPL, the instruction loads the access byte into the specified destination register as the higher byte (the low byte is zero) and the zero flag is set. Once loaded, the access bits can be tested. System segments such as a task state segment or a descriptor table cannot be read or modified. This instruction is used to verify that a pointer refers to a segment of the proper privilege level and type. If the RPL or CPL is greater than DPL, or the selector is outside the table limit, no access value is returned and the zero flag is cleared. Conforming code segments may be accessed from any RPL or CPL.

Additional parameter checking can be performed via the load segment limit (LSL) instruction. If the descriptor denoted by the given selector (in memory or a register) is visible at the CPL, LSL loads the specified register with a word that consists of the limit field of that descriptor. This can only be done for segments, task state segments, and local

descriptor tables (i.e., words from control descriptors are inaccessible). Interpreting the limit is a function of the segment type. For example, downward expandable data segments treat the limit differently than code segments do.

For both LAR and LSL, the zero flag (ZF) is set if the loading was performed; otherwise, the zero flag is cleared. Both instructions are undefined in real address mode, causing an invalid opcode exception (interrupt #6).

11.3.1 Descriptor Validation

The iAPX 286 has two instructions, VERR and VERW, which determine whether a selector points to a segment that can be read or written at the current privilege level. Neither instruction causes a protection fault if the result is negative.

VERR verifies a segment for reading and loads ZF with 1 if that segment is readable from the current privilege level. The validation process checks that: 1) the selector points to a descriptor within the bounds of the GDT or LDT, 2) it denotes a segment descriptor

(as opposed to a control descriptor), and 3) the segment is readable and of appropriate privilege level. The privilege check for data segments and non-conforming code segments is that the DPL must be numerically greater than or equal to both the CPL and the selector's RPL. Conforming segments are not checked for privilege level.

VERW provides the same capability as VERR for verifying writability. Like the VERR instruction, VERW loads ZF if the result of the writability check is positive. The instruction checks that the descriptor is within bounds, is a segment descriptor, is writable, and that its DPL is numerically greater or equal to both the CPL and the selector's RPL. Code segments are never writable, conforming or not.

11.3.2 Pointer Integrity: RPL and the "Trojan Horse Problem"

The Requested Privilege Level (RPL) feature can prevent inappropriate use of pointers that could corrupt the operation of more privileged code or data from a less privileged level.

A common example is a file system procedure, FREAD (file_id, nybytes, buffer_ptr). This hypothetical procedure reads data from a file into a buffer, overwriting whatever is there. Normally, FREAD would be available at the user level, supplying only pointers to the file system procedures and data located and operating at a privileged level. Normally, such a procedure prevents user-level procedures from directly changing the file tables. However, in the absence of a standard protocol for checking pointer validity, a user-level procedure could supply a pointer into the file tables in place of its buffer pointer, causing the FREAD procedure to corrupt them unwittingly.

By using the RPL, you can avoid such problems. The RPL field allows a privilege

attribute to be assigned to a selector. This privilege attribute would normally indicate the privilege level of the code which generated the selector. The iAPX 286 hardware will automatically check the RPL of any selector loaded into a segment register or a control register to see if the RPL allows access.

To guard against invalid pointers, the called procedure need only ensure that all selectors passed to it have an RPL at least as high (numerically) as the original caller's CPL. This indicates that the selectors were not more trusted than their supplier. If one of the selectors is used to access a segment that the caller would not be able to access directly, i.e., the RPL is numerically greater than the DPL, then a protection fault will result when loaded into a segment or control register.

The caller's CPL is available in the CS selector that was pushed on the stack as the return address. A special instruction, ARPL, can be used to appropriately adjust the RPL field of the pointer. ARPL (Adjust RPL field of selector instruction) adjusts the RPL field of a selector to become the larger of its original value and the value of the RPL field in a specified register. The latter is normally loaded from the caller's CS register which can be found on the stack. If the adjustment changes the selector's RPL, ZF is set; otherwise, the zero flag is cleared.

11.4 NPX CONTEXT SWITCHING

The context of a processor extension (such as the 80287 numeric processor) is not changed by the task switch operation. A processor extension context need only be changed when a different task attempts to use the processor extension (which still contains the context of a previous task). The 80286 detects the first use of a processor extension after a task switch by causing the processor extension not-present exception (#7) if the TS bit is set. The interrupt handler may then decide whether a context change is necessary.

The 286 services numeric errors only when it executes wait or escape instructions because the processor extension is running independently. Therefore, the numeric error from one task may not be recorded until the 286 is running a different task. If the 286 task has changed, it makes sense to defer handling that error until the original task is restored. For example, interrupt handlers that use the NPX should not have their timing upset by a numeric error interrupt that pertains to some earlier process. It is of little value to service someone else's error.

If the task switch bit is set (bit 3 of MSW) when the CPU begins to execute a wait or escape instruction, the processor-extension not-present exception results (#7). The handler for this interrupt must know who currently "owns" the NPX, i.e., the handler must know the last task to issue a command to the NPX. If the owner is the same as the current task, then it was merely interrupted and the interrupt handler has since returned; the handler for interrupt 7 simply clears the TS bit, restores the working registers, and returns (restoring interrupts if enabled).

If the recorded owner is different from the current task, the handler must first save the existing NPX context in the save area of the old task. It can then re-establish the correct NPX context from the current task's save area.

The code example in figure 11-3 relies on the convention that each TSS entry in the GDT is followed by an alias entry for a data segment that points to the same physical region of memory that contains the TSS. The alias segment also contains an area for saving the NPX context, the kernel stack, and certain kernel data. That is, the first 44 bytes in that segment are the 286 context, followed by 94 bytes for the processor extension context,

followed in some cases by the kernel stack and kernel private data areas.

The implied convention is that the stack segment selector points to this data segment alias so that whenever there is an interrupt at level zero and SS is automatically loaded, all of the above information is immediately addressable.

It is assumed that the program example knows about only one data segment that points to a global data area in which it can find the one word NPX owner to begin the processing described. The specific operations needed, and shown in the figure, are listed in table 11-1.

11.5 MULTIPROCESSOR CONSIDERATIONS

As mentioned in Chapter 8, a bus lock is applied during the testing and setting of the task busy bit to ensure that two processors do not invoke the same task at the same time. However, protection traps and conflicting use of dynamically varying segments or descriptors must be addressed by an inter-processor synchronization protocol. The protocol can use the indivisible semaphore operation of the base instruction set. Coordination of interrupt and trap vectoring must also be addressed when multiple concurrent processors are operating.

The interrupt bus cycles are locked so no interleaving occurs on those cycles. Descriptor caching is locked so that a descriptor reference cannot be altered while it is being fetched.

When a program changes a descriptor that is shared with other processors, it should broadcast this fact to the other processors. This broadcasting can be done with an inter-

ADVANCED TOPICS

processor interrupt. The handler for this interrupt must ensure that the segment registers, the LDTR and the TR, are re-loaded. This happens automatically if the interrupt is serviced by a task switch.

Modification of descriptors of shared segments in multi-processor systems may require that the on-chip descriptors also be updated. For example, one processor may attempt to mark the descriptor of a shared

segment as not-present while another is using it. Software has to ensure that the descriptors in the segment register caches are updated with the new information. The segment register caches can be updated by a re-entrant procedure that is invoked by an inter-processor interrupt. The handler must ensure that the segment registers, the LDTR and the TR, are re-loaded. This happens automatically if the interrupt is serviced by a task switch.

```

ASSEMBLER INVOKED BY: ASM286.86 :F5:SWNPX.A86

LDC OBJ          LINE    SOURCE
1 *1             #title('Switch the NPX Context on First Use After a Task Switch')
2
3               name      switch_npx_context
4
5               public:  switch_NPX_context
6               extrn    last_npx_task:word
7
8               ;
9               ;           This interrupt handler will switch the NPX context if a new task
10              ;           is attempting to use the NPX context of another task after a task
11              ;           switch.  If the NPX context belongs to the current task, nothing happens.
12              ;
13              ;           A trap gate should be placed in IDT entry 7 referring to this routine.
14              ;           The DPL of the gate should be 0 to prevent spoofing.  The code segment
15              ;           must be at privilege level 0.
16              ;
17              ;           The kernel stack is assumed to overlay the TSS and the NPX save area
18              ;           is placed at the end of the TSS area.
19              ;
20              ;           A global word variable LAST_NPX_TASK identifies the TSS selector of
21              ;           the last task to use the NPX.
22              ;
002C            22      npx_save_area      equ     word ptr 44      ; Offset of NPX save area in TSS
23              *1      reject
24              kernel_code      segment er public
25
0000            26      switch_npx_context  proc     far wc(0)
27
0000 50          28              push     ax              ; Save working registers
0001 1E          29              push     ds
0002 BB ---     E      30              mov     ax,seg last_npx_task ; Get address of id of last NPX task
0005 8EDB      31              mov     ds,ax
0007 0F00CB    32              str     ax              ; Get id of this task
000A 24FC      33              and     al,not 3        ; Remove RPL field
000C 0F06      34              clls             ; Clear task switched flag
000E FA        35              cli              ; No interrupts allowed!
36
37              ;
38              ;           Last_npx_word cannot change due to other interrupts after this point.
000F 3B060000  E      39              cmp     ax,ds:last_npx_task ; See if same task
0013 7412      40              je      same_task
41
0015 87060000  E      42              xchg   ax,ds:last_npx_task ; Set new task id and get old one
0019 050800    43              add     ax,8           ; Go to TSS alias
001C 8EDB      44              mov     ds,ax         ; Address TSS of previous NPX task
001E DD362C00  45              fsave  ds:npx_save_area ; Save old NPX state
0022 36DD262C00 46              fstors  ss:npx_save_area ; Get current NPX state
0027          47      same_task:
0027 1F        48              pop     ds             ; Return to interrupted program
0028 5B        49              pop     ax
0029 CF        50              iret
51
52      switch_npx_context      endp
53
54      kernel_code      ends
*** WARNING #160, LINE #54, SEGMENT CONTAINS PRIVILEGED INSTRUCTIONS
55

```

Figure 11-3. Example of NPX Context Switching

Table 11-1. NPX Context Switching

| Step | Operation | Lines (Figure 11-3) |
|-----------------|---|------------------------|
| 1. | Save the working registers | 28, 29 |
| 2. | Set up address for kernel work area | 30, 31 |
| 3. | Get current task ID from Task Register | 32 |
| 4. | Clear Task Switch flag to allow NPX work | 34 |
| 5. | Inhibit interrupts | 35 |
| 6. | Compare owner with current task ID | 37 |
| If same owner: | | |
| 7a. | Restore working registers | 48, 49 |
| 7b. | and return | 50 |
| If owner is not | | |
| current task: | | |
| 8a. | Use owner ID to save old context in its TSS | 42, 43, 44 |
| 8b. | Restore context of current task; | 45 |
| | restore working registers; | 46 |
| | and return | 52 |

11.6 SHUTDOWN

Shutdown occurs when a severe error condition prevents further processing. Shutdown is very similar to HLT in that the iAPX 286

stops executing instructions. The 80286 externally signals shutdown as a Halt bus cycle with A1=0. The NMI or RESET input will force the 80286 out of shutdown. The INTR input is ignored during shutdown.

Appendix
iAPX 286 System Initialization

A

APPENDIX A

Contents

| | |
|-----------------------------|-----|
| System Initialization | A-1 |
|-----------------------------|-----|

APPENDIX A

IAPX 286 SYSTEM INITIALIZATION

```
$title('Switch the 80286 from Real Address Mode to Protected Mode')
    name    switch 80286_modes
    public  idt_desc,gdt_desc
;
;
;       Switch the 80286 from real address mode into protected mode.
;       The initial EPROM GDT, IDT, TSS, and LDT (if any) constructed by BLD286
;       will be copied from EPROM into RAM. The RAM areas are defined by data
;       segments allocated as fixed entries in the GDT. The CPU registers for
;       the GDT, IDT, TSS, and LDT will be set to point at the RAM-based
;       segments. The base fields in the RAM-based GDT will also be updated to
;       point at the RAM-based segments.
;
;       This code is used by adding it to the list of object modules given
;       to BLD286. BLD286 must then be told to place the segment
;       init_code at address FFFE10H. Execution of the mode switch code begins
;       after RESET. This happens because the mode switch code will start at
;       physical address FFFFFFF0H, which is the power up address. This code then
;       sets up RAM copies of the EPROM-based segments before jumping to the
;       initial task placed at a fixed GDT entry. After the jump, the CPU
;       executes in the state of the first task defined by BLD286.
;
;       This code will not use any of the EPROM-based tables directly.
;       Such use would result in the 80286 writing into EPROM to set
;       the A bit. Any use of a GDT or TSS will always be in the RAM copy.
;       The limit and size of the EPROM-based GDT and IDT must be stored at
;       the public symbols idt_desc and gdt_desc. The location commands of BLD286
;       provide this function.
;
;       Interrupts are disabled during this mode switching code. Full error
;       checking is made of the EPROM-based GDT, IDT, TSS, and LDT to assure
;       they are valid before copying them to RAM. If any of the RAM-based
;       alias segments are smaller than the EPROM segments they are to hold,
;       halt or shutdown will occur. In general, any exception or NMI will
;       cause shutdown to occur until the first task is invoked.
;
;       If the RAM segment is larger than the EPROM segment, the RAM segment
;       will be expanded with zeros. If the initial TSS specifies an LDT,
;       the LDT will also be copied into ldt_alias with zero fill if needed.
;       The EPROM-based or RAM-based GDT, IDT, TSS, and LDT segments may be located
;       anywhere in physical memory.
;
```

IAPX 286 SYSTEM INITIALIZATION

```

;
;   Define layout of a descriptor.
;
desc          struc
limit        dw          0          ; Offset of last byte in segment
base_low     dw          0          ; Low 16 bits of 24-bit address
base_high    db          0          ; High 8 bits of 24-bit address
access       db          0          ; Access rights byte
res          dw          0          ; Reserved word
desc         ends
;
;   Define the fixed GDT selector values for the descriptors that
;   define the EPROM-based tables. BLD286 must be instructed to place the
;   appropriate descriptors into the GDT.
;
gdt_alias     equ        1*size desc ; GDT(1) is data segment in RAM for GDT
idt_alias     equ        2*size desc ; GDT(2) is data segment in RAM for IDT
start_TSS_alias equ     3*size desc  ; GDT(3) is data segment in RAM for TSS
start_task    equ        4*size desc  ; GDT(4) is TSS for starting task
start_LDT_alias equ     5*size desc  ; GDT(5) is data segment in RAM for LDT
;
;   Define machine status word bit positions.
;
PE           equ        1          ; Protection enable
MP           equ        2          ; Monitor processor extension
EM           equ        4          ; Emulate processor extension
;
;   Define particular values of descriptor access rights byte.
;
DT_ACCESS    equ        82H        ; Access byte value for an LDT
DS_ACCESS    equ        92H        ; Access byte value for data segment
;   which is grow up, at level 0, writeable
TSS_ACCESS   equ        81H        ; Access byte value for an idle TSS
DPL          equ        60H        ; Privilege level field of access rights
ACCESSED     equ        1          ; Define accessed bit
TI           equ        4          ; Position of TI bit
TSS_SIZE     equ        44         ; Size of a TSS
LDT_OFFSET   equ        42         ; Position of LDT in TSS
TIRPL_MASK   equ        size desc-1 ; TI and RPL field mask
;
;   Pass control from the power-up address to the mode switch code.
;   The segment containing this code must be at physical address FFFE10H
;   to place the JMP instruction at physical address FFFF0H. The base
;   address is chosen according to the size of this segment.
;
init_code     segment er
;
cs_offset     equ        0FE10H     ; Low 16 bits of starting address
org          0FFF0H-cs_offset ; Start at address FFFF0H
jmp          reset_startup ; Do not change CS!

```

IAPX 286 SYSTEM INITIALIZATION

```
;
;   Define the template for a temporary GDT used to locate the initial
;   GDT and stack. This data will be copied to location 0.
;   This space is also used for a temporary stack and finally serves
;   as the TSS written into when entering the initial TSS.
;
;           org      0           ; Place remaining code below power_up
;
initial_gdt   desc    <>         ; Filler and null IDT descriptor
gdt_desc     desc    <>         ; Descriptor for EPROM GDT
idt_desc     desc    <>         ; Descriptor for EPROM IDT
temp_desc    desc    <>         ; Temporary descriptor
;
;   Define a descriptor that will point the GDT at location 0.
;   This descriptor will also be loaded into SS to define the initial
;   protected mode stack segment.
;
temp_stack   desc    <end_gdt-initial_gdt-1,0,0,DS_ACCESS,0>
;
;   Define the TSS descriptor used to allow the task switch to the
;   first task to overwrite this region of memory. The TSS will overlay
;   the initial GDT and stack at location 0.
;
save_tss     desc    <end_gdt-initial_gdt-1,0,0,TSS_ACCESS,0>
;
;   Define the initial stack space and filler for the end of the TSS.
;
;           dw      8 dup (0)
end_gdt       label   word
;
start_pointer label   dword
;           dw      0,start_task ; Pointer to initial task
;
;   Define template for the task definition list.
;
task_entry   struc
TSS_sel      dw      ?          ; Define layout of task description
;           ; Selector for TSS
TSS_alias    dw      ?          ; Data segment alias for TSS
;           ; Data segment alias for LDT if any
LDT_alias    dw      ?
task_entry   ends
;
task_list    task_entry <start_task,start_TSS_alias,start_LDT_alias>
;           dw      0           ; Terminate list
;
reset_startup:
cli          ; No interrupts allowed!
cld          ; Use autoincrement mode
xor         di,di ; Point ES:DI at physical address 000000H
mov         ds,di
mov         es,di
mov         ss,di ; Set stack at end of reserved area
mov         sp,end_gdt-initial_gdt
```

IAPX 286 SYSTEM INITIALIZATION

```
;
;   Form an adjustment factor from the real CS base of FF0000H to the
;   segment base address assumed by ASM286. Any data reference made
;   into CS must add an indexing term [BP] to compensate for the difference
;   between the offset generated by ASM286 and the offset required from
;   the base of FF0000H.
;
start  proc                ; The value of IP at run time will not be
                           ; the same as the one used by ASM286!
      call   start1        ; Get true offset of start1
start1:
      pop    bp
      sub    bp,offset start1 ; Subtract ASM286 offset of start1
                           ; leaving adjustment factor in BP
      lidt   initial_gdt[bp] ; Setup null IDT to force shutdown
                           ; on any protection error or interrupt
;
;   Copy the EPROM-based temporary GDT into RAM.
;
      lea    si,initial_gdt[bp] ; Setup pointer to temporary GDT
                           ; template in EPROM
      mov    cx,(end_gdt-initial_gdt)/2 ; Set length
      rep   movs es:word ptr [di],cs:[si]; Put into reserved RAM area
;
;   Look for 80287 processor extension. Assume all ones will be read
;   if an 80287 is not present.
;
      fninit                ; Initialize 80287 if present
      mov    bx,EM          ; Assume no 80287
      fstsw  ax             ; Look at status of 80287
      or     al,al         ; No errors should be present
      jnz    set_mode       ; Jump if no 80287

      fsetpm                ; Put 80287 into protected mode
      mov    bx,MP
;
;   Switch to protected mode and setup a stack, GDT, and LDT.
;
set_mode:
      smsw   ax             ; Get current MSW
      or     ax,PE         ; Set PE bit
      or     ax,bx        ; Set NPX status flags
      lmsw  ax             ; Enter protected mode!
      jmp    $+2          ; Clear queue of instructions decoded
                           ; while in Real Address Mode
                           ; CPL is now 0, CS still points at
                           ; FFFE10 in physical memory
```

iAPX 286 SYSTEM INITIALIZATION

```

lgdt    temp_stack[bp]      ; Use initial GDT in RAM area
mov     ax,temp_stack-initial_gdt ; Setup SS with valid protected mode
mov     ss,ax               ; selector to the RAM GDT and stack
xor     ax,ax               ; Set the current LDT to null
lidt   ax                   ; Any references to it will cause
                           ; an exception causing shutdown
mov     ax,save_tss-initial_gdt ; Set initial TSS into the low RAM
ltr     ax                   ; The task switch needs a valid TSS
;
;       Copy the EPROM-based GDT into the RAM data segment alias.
;       First the descriptor for the RAM data segment must be copied into
;       the temporary GDT.
;
mov     ax,gdt_desc[bp].limit ; Get size of GDT
cmp     ax,6*size_desc-1     ; Be sure the last entry expected by
                           ; this code is inside the GDT
jb     bad_gdt                ; Jump if GDT is not big enough

mov     bx,gdt_desc-initial_gdt ; Form selector to EPROM GDT
mov     si,gdt_alias          ; Get selector of GDT alias
call   copy_EPROM_gdt        ; Copy into EPROM
mov     si,idt_alias          ; Get selector of IDT alias
mov     bx,idt_desc-initial_gdt ; Indicate EPROM IDT
call   copy_EPROM_idt        ;
mov     ax,gdt_desc-initial_gdt ; Setup addressing into EPROM GDT
mov     ds,ax
mov     bx,gdt_alias          ; Get GDT alias data segment selector
lgdt   [bx]                  ; Set GDT to RAM GDT
                           ; SS and TR remain in low RAM
;
;       Copy all task's TSS and LDT segments into RAM
;
lea     bx,task_list[bp]      ; Define list of tasks to setup
copy_task_loop:
call   copy_tasks            ; Copy them into RAM
add    bx,size_task_entry    ; Go to next entry
mov    ax,cs:[bx].tss_sel     ; See if there is another entry
or     ax,ax
jnz    copy_task_loop
;
;       With TSS, GDT, and LDT set, startup the initial task!
;
mov     bx,gdt_alias          ; Point DS at GDT
mov     ds,bx
mov     bx,idt_alias          ; Get IDT alias data segment selector
lidt   [bx]                  ; Set IDT for errors and interrupts
jmp     start_pointer[bp]     ; Start the first task!
                           ; The low RAM area is overwritten with
                           ; the current CPU context
bad_gdt:
hlt
;       Halt here if GDT is not big enough

```

IAPX 286 SYSTEM INITIALIZATION

```

start   endp
;
;       Copy the TSS and LDT for the task pointed at by CS:BX.
;       If the task has an LDT it will also be copied down.
;       BX and BP are transparent.
;
bad_tss:
    hlt                ; Halt here if TSS is invalid
copy_tasks   proc

    mov     si,gdt_alias    ; Get addressability to GDT
    mov     ds,si
    mov     si,cs:[bx].tss_alias    ; Get selector for TSS alias
    mov     es,si          ; Point ES at alias data segment
    lsl     ax,si          ; Get length of TSS alias
    mov     si,cs:[bx].tss_sel    ; Get TSS selector
    lar     dx,si          ; Get alias access rights
    jnz     bad_tss        ; Jump if invalid reference

    mov     dl,dh          ; Save TSS descriptor access byte
    and     dh,not DPL     ; Ignore privilege
    cmp     dh,TSS_ACCESS ; See if TSS
    jnz     bad_tss        ; Jump if not

    lsl     cx,si          ; Get length of EPROM based TSS
    cmp     cx,TSS_SIZE-1 ; Verify it is of proper size
    jb     bad_tss        ; Jump if it is not big enough

;
;       Setup for moving the EPROM-based TSS to RAM
;       DS points at GDT
;
    mov     [si].access,DS_ACCESS ; Make TSS into data segment
    mov     ds,si          ; Point DS at EPROM TSS
    call    copy_with_fill    ; Copy DS segment to ES with zero fill
                                ; CX has copy count, AX-CX fill count

;
;       Set the GDT TSS limit and base address to the RAM values.
;
    mov     ax,gdt_alias    ; Restore GDT addressing
    mov     ds,ax
    mov     es,ax
    mov     di,cs:[bx].tss_sel    ; Get TSS selector
    mov     si,cs:[bx].tss_alias  ; Get RAM alias selector
    movsw                   ; Copy limit
    movsw                   ; Copy low 16 bits of address
    lodsw                   ; Get high 8 bits of address
    mov     ah,dl          ; Mark as TSS descriptor
    stosw                   ; Fill in high address and access bytes
    movsw                   ; Copy reserved word

```

IAPX 286 SYSTEM INITIALIZATION

```

;
;   See if a valid LDT is specified for the startup task
;   If so then copy the EPROM version into the RAM alias.
;
mov     ds,cs:[bx].tss_alias    ; Address TSS to get LDT
mov     si,ds:word ptr LDT_OFFSET
and     si,not TIRPL_MASK      ; Ignore TI and RPL
jz      no_ldt                 ; Skip this if no LDT used

push    si                     ; Save LDT selector
lar     dx,si                  ; Test descriptor
jnz     bad_ldt                ; Jump if invalid selector

mov     dl,dh                  ; Save LDT descriptor access byte
and     dh,not DPL             ; Ignore privilege
cmp     dh,DT_ACCESS           ; Be sure it is an LDT descriptor
jne     bad_ldt                ; Jump if invalid

mov     es:[si].access,DS_ACCESS; Mark LDT as data segment
mov     ds,si                  ; Point DS at EPROM LDT
lsl     ax,si                  ; Get LDT limit
call    test_dt_limit          ; Verify it is valid
mov     cx,ax                  ; Save for later

;
;   Examine the LDT alias segment and, if good, copy to RAM
;
mov     si,cs:[bx].ldt_alias   ; Get ldt alias selector
mov     es,si                  ; Point ES at alias segment
lsl     ax,si                  ; Get length of alias segment
call    test_dt_limit          ; Verify it is valid
call    copy_with_fill         ; Copy LDT into RAM alias segment

;
;   Set the LDT limit and base address to the RAM copy of the LDT.
;
mov     si,cs:[bx].ldt_alias   ; Restore LDT alias selector
pop     di                     ; Restore LDT selector
mov     ax,gdt_alias          ; Restore GDT addressing
mov     ds,ax
mov     es,ax
movsw                       ; Move the RAM LDT limit
movsw                       ; Move the low 16 bits across
lodsw                       ; Get the high 8 bits
mov     ah,dl                  ; Mark as LDT descriptor
stosw                       ; Set high address and access rights
movsw                       ; Copy reserved word

no_ldt:
ret                             ; All done

bad_ldt:
hlt                             ; Halt here if LDT is invalid

copy_tasks    endp

```


IAPX 286 SYSTEM INITIALIZATION

```
;
;       Test the descriptor table size in AX to verify that it is an
;       even number of descriptors in length.
;
test_dt_limit    proc

    push    ax                ; Save length
    and     al,7              ; Look at low order bits
    cmp     al,7              ; Must be all ones
    pop     ax                ; Restore length
    jne     bad_dt_limit

    ret                        ; All OK
bad_dt_limit:
    hlt                        ; Die!

test_dt_limit    endp

;
;       Copy the EPROM DT at selector BX in the temporary GDT to the alias
;       data segment at selector SI. Any improper descriptors or limits
;       will cause shutdown!
;
copy_EPR0M_dt    proc

    mov     ax,ss              ; Point ES:DI at temporary descriptor
    mov     es,ax
    mov     es:[bx].access,DS_ACCESS; Mark descriptor as a data segment
    mov     es:[bx].res,0      ; Clear reserved word
    lsl     ax,bx              ; Get limit of EPROM DT
    mov     cx,ax              ; Save for later
    call    test_dt_limit      ; Verify it is a proper limit
    mov     di,gdt_desc-initial_gdt ; Address EPROM GDT in DS
    mov     ds,di
    mov     di,temp_desc-initial_gdt; Get selector for temporary descriptor
    push    di                 ; Save offset for later use as selector
    lodsw                       ; Get alias segment size
    call    test_dt_limit      ; Verify it is an even multiple of
                                ; descriptors in length
    stosw                       ; Put length into temporary
    movsw                       ; Copy remaining entries into temporary
    movsw
    movsw
    pop     es                 ; ES now points at the GDT alias area
    mov     ds,bx              ; DS now points at EPROM DT as data
                                ; Copy segment to alias with zero fill
                                ; CX is copy count, AX-CX is fill count
                                ; Fall into copy_with_fill

copy_EPR0M_dt    endp
```

IAPX 286 SYSTEM INITIALIZATION

```
;
;      Copy the segment at DS to the segment at ES for length CX.
;      Fill the end with AX-CX zeros. Use word operations for speed but
;      allow odd byte operations.
;
copy_with_fill  proc

        xor     si,si                ; Start at beginning of segments
        xor     di,di
        sub     ax,cx                ; Form fill count
        add     cx,1                 ; Convert limit to count
        rcr     cx,1                 ; Allow full 64K move
    rep  movsw  ax,cx                 ; Copy DT into alias area
        xchg    ax,cx                 ; Get fill count and zero AX
        jnc     even_copy            ; Jump if even byte count on copy

        movsb  cx,cx                 ; Copy odd byte
        or     cx,cx
        jz     exit_copy             ; Exit if no fill

        stosb  cx,cx                 ; Even out the segment offset
        dec    cx                     ; Adjust remaining fill count
even_copy:
        shr    cx,1                   ; Form word count on fill
    rep  stosw  ax,cx                 ; Clear unused words at end
        jnc    exit_copy             ; Exit if no odd byte remains

        stosb  ax,ax                 ; Clear last odd byte
exit_copy:
        ret

copy_with_fill  endp

init_code      ends
end
```

Appendix
The iAPX 286 Instruction Set

B

APPENDIX B

Contents

| | |
|--|-----------------|
| Opcode | B-1 |
| Instruction | B-5 |
| Clocks | B-6 |
| Description | B-6 |
| Flags Modified | B-6 |
| Flags Undefined | B-6 |
| Operation | B-6 |
| Protected Mode Exceptions | B-6 |
| Real Address Mode Exceptions | B-7 |
| Protection Exceptions | B-7 |
| Error Codes | B-7 |
| #DF8 Double Fault (Zero Error Code) | B-8 |
| #GP 13 General Protection (Selector or Zero Error Code) | B-8 |
| #MF 16 Math Fault (No Error Code) | B-8 |
| #MP 9 Math Unit Protection Fault (No Error Code) | B-9 |
| #NM 7 No Math Unit Available (No Error Code) | B-9 |
| #NP 11 Not Present (Selector Error Code) | B-9 |
| #SS 12 Stack Fault (Selector or Zero Error Code) | B-10 |
| #TS 10 Invalid Task State Segment (Selector Error Code) | B-10 |
| #UD 6 Undefined Opcode (No Error Code) | B-11 |
| Privilege Level and Task Switching on the iAPX 286 | B-11 |
| Instructions: AAA-XOR | B-14 thru B-111 |

APPENDIX B

THE iAPX 286 INSTRUCTION SET

This section presents the iAPX 286 instruction set using Intel's ASM286 notation. All possible operand types are shown. Instructions are organized alphabetically according to generic operations. Within each operation, many different instructions are possible depending on the operand. The pages are presented in a standardized format, the elements of which are described in the following paragraphs.

Opcode

This column gives the complete object code produced for each form of the instruction. Where possible, the codes are given as hexadecimal bytes, presented in the order in which they will appear in memory. Several shorthand conventions are used for the parts of instructions which specify operands. These conventions are as follows:

/n: (*n* is a digit from 0 through 7) A ModRM byte, plus a possible immediate and displacement field follow the opcode. See figure B-1 for the encoding of the fields. The digit *n* is the value of the REG field of the ModRM byte. To obtain the possible hexadecimal values for */n*, refer to column *n* of table B-1. Each row gives a possible value for the effective address operand to the instruction. The entry at the end of the row indicates whether the effective address operand is a register or memory; if memory, the entry indicates what kind of indexing and/or displacement is used. Entries with D8 or D16 signify that a one-byte or two-byte displacement quantity immediately follows the ModRM and optional immediate field bytes. The signed displacement is added to the effective address offset.

/r: A ModRM byte that contains both a register operand and an effective address

operand, followed by a possible immediate and displacement field. See figure B-2 for the encoding of the fields. The ModRM byte could be any value appearing in table B-1. The column determines which register operand was selected; the row determines the form of effective address. If the row entry mentions D8 or D16, then a one-byte or two-byte displacement follows, as described in the previous paragraph.

cb: A one-byte signed displacement in the range of -128 to $+127$ follows the opcode. The displacement is sign-extended to 16 bits, and added modulo 65536 to the offset of the instruction FOLLOWING this instruction to obtain the new IP value.

cw: A two-byte displacement is added modulo 65536 to the offset of the instruction FOLLOWING this instruction to obtain the new IP value.

cd: A two-word pointer which will be the new CS:IP value. The offset is given first, followed by the selector.


db: An immediate byte operand to the instruction which follows the opcode and ModRM bytes. The opcode determines if it is a signed value.

dw: An immediate word operand to the instruction which follows the opcode and ModRM bytes. All words are given in the iAPX 286 with the low-order byte first.

+rb: A register code from 0 through 7 which is added to the hexadecimal byte given at the left of the plus sign to form a single opcode byte. The codes are: AL=0, CL=1, DL=2, BL=3, AH=4, CH=5, DH=6, and BH=7.

THE IAPX 286 INSTRUCTION SET

/n Instruction Byte Format

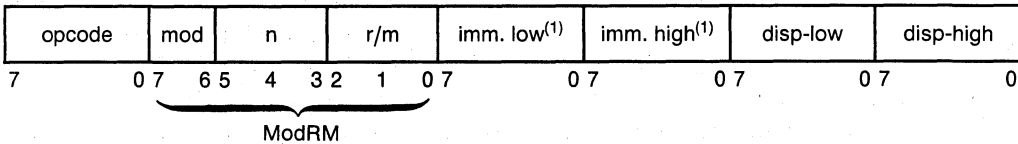

"mod" Field Bit Assignments

| mod | Displacement |
|-----|---|
| 00 | DISP = 0 ⁽²⁾ , disp-low and disp-high are absent |
| 01 | DISP = disp-low sign-extended to 16-bits, disp-high is absent |
| 10 | DISP = disp-high: disp-low |
| 11 | r/m is treated as a "reg" field |

"r/m" Field Bit Assignments

| r/m | Operand Address |
|-----|----------------------------|
| 000 | (BX) + (SI) + DISP |
| 001 | (BX) + (DI) + DISP |
| 010 | (BP) + (SI) + DISP |
| 011 | (BP) + (DI) + DISP |
| 100 | (SI) + DISP |
| 101 | (DI) + DISP |
| 110 | (BP) + DISP ⁽²⁾ |
| 111 | (BX) + DISP |

DISP follows 2nd byte of instruction (before data if required).

NOTES:

1. Opcode indicates presence and size of immediate value.
2. Except if mod=00 and r/m=110 then EA=disp-high: disp-low.

Figure B-1. /n Instruction Byte Format

THE IAPX 286 INSTRUCTION SET

Table B-1. ModRM Values

| Rb = | AL | CL | DL | BL | AH | CH | DH | BH | |
|--------------|----|----|----|----|----|----|----|----|--------------------------------|
| Rw = | AX | CX | DX | BX | SP | BP | SI | DI | |
| REG = | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| ModRM values | | | | | | | | | Effective address |
| mod=00 | 00 | 08 | 10 | 18 | 20 | 28 | 30 | 38 | [BX + SI] |
| | 01 | 09 | 11 | 19 | 21 | 29 | 31 | 39 | [BX + DI] |
| | 02 | 0A | 12 | 1A | 22 | 2A | 32 | 3A | [BP + SI] |
| | 03 | 0B | 13 | 1B | 23 | 2B | 33 | 3B | [BP + DI] |
| | 04 | 0C | 14 | 1C | 24 | 2C | 34 | 3C | [SI] |
| | 05 | 0D | 15 | 1D | 25 | 2D | 35 | 3D | [DI] |
| | 06 | 0E | 16 | 1E | 26 | 2E | 36 | 3E | D16 (simple var) |
| | 07 | 0F | 17 | 1F | 27 | 2F | 37 | 3F | [BX] |
| mod=01 | 40 | 48 | 50 | 58 | 60 | 68 | 70 | 78 | [BX + SI] + D8 ⁽¹⁾ |
| | 41 | 49 | 51 | 59 | 61 | 69 | 71 | 79 | [BX + DI] + D8 |
| | 42 | 4A | 52 | 5A | 62 | 6A | 72 | 7A | [BP + SI] + D8 |
| | 43 | 4B | 53 | 5B | 63 | 6B | 73 | 7B | [BP + DI] + D8 |
| | 44 | 4C | 54 | 5C | 64 | 6C | 74 | 7C | [SI] + D8 |
| | 45 | 4D | 55 | 5D | 65 | 6D | 75 | 7D | [DI] + D8 |
| | 46 | 4E | 56 | 5E | 66 | 6E | 76 | 7E | [BP] + D8 ⁽²⁾ |
| | 47 | 4F | 57 | 5F | 67 | 6F | 77 | 7F | [BX] + D8 |
| mod=10 | 80 | 88 | 90 | 98 | A0 | A8 | B0 | B8 | [BX + SI] + D16 ⁽³⁾ |
| | 81 | 89 | 91 | 99 | A1 | A9 | B1 | B9 | [BX + DI] + D16 |
| | 82 | 8A | 92 | 9A | A2 | AA | B2 | BA | [BP + SI] + D16 |
| | 83 | 8B | 93 | 9B | A3 | AB | B3 | BB | [BP + DI] + D16 |
| | 84 | 8C | 94 | 9C | A4 | AC | B4 | BC | [SI] + D16 |
| | 85 | 8D | 95 | 9D | A5 | AD | B5 | BD | [DI] + D16 |
| | 86 | 8E | 96 | 9E | A6 | AE | B6 | BE | [BP] + D16 ⁽²⁾ |
| | 87 | 8F | 97 | 9F | A7 | AF | B7 | BF | [BX] + D16 |
| mod=11 | C0 | C8 | D0 | D8 | E0 | E8 | F0 | F8 | Ew=AX Eb=AL |
| | C1 | C9 | D1 | D9 | E1 | E9 | F1 | F9 | Ew=CX Eb=CL |
| | C2 | CA | D2 | DA | E2 | EA | F2 | FA | Ew=DX Eb=DL |
| | C3 | CB | D3 | DB | E3 | EB | F3 | FB | Ew=BX Eb=BL |
| | C4 | CC | D4 | DC | E4 | EC | F4 | FC | Ew=SP Eb=AH |
| | C5 | CD | D5 | DD | E5 | ED | F5 | FD | Ew=BP Eb=CH |
| | C6 | CE | D6 | DE | E6 | EE | F6 | FE | Ew=SI Eb=DH |
| | C7 | CF | D7 | DF | E7 | EF | F7 | FF | Ew=DI Eb=BH |

NOTES:

1. D8 denotes an 8-bit displacement following the ModRM byte that is sign-extended and added to the index.
2. Default segment register is SS for effective addresses containing a BP index; DS is for other memory effective addresses.
3. D16 denotes the 16-bit displacement following the ModRM byte that is added to the index.

THE IAPX 286 INSTRUCTION SET

/r Instruction Byte Format

| | | | | | | |
|-------|-------|-----|-------------------------|--------------------------|----------|-----------|
| mod | r | r/m | imm. low ⁽¹⁾ | imm. high ⁽¹⁾ | disp-low | disp-high |
| 7 6 5 | 4 3 2 | 1 0 | 7 | 0 7 | 0 7 | 0 7 0 |

“mod” Field Bit Assignments

| mod | Displacement |
|-----|---|
| 00 | DISP = 0 ⁽²⁾ , disp-low and disp-high are absent |
| 01 | DISP = disp-low sign-extended to 16-bits, disp-high is absent |
| 10 | DISP = disp-high; disp-low |
| 11 | r/m is treated as a “reg” field |

“r” Field Bit Assignments

| 16-Bit (w = 1) | 8-Bit (w = 0) | Segment |
|----------------|---------------|---------|
| 000 AX | 000 AL | 00 ES |
| 001 CX | 001 CL | 01 CS |
| 010 DX | 010 DL | 10 SS |
| 011 BX | 011 BL | 11 DS |
| 100 SP | 100 AH | |
| 101 BP | 101 CH | |
| 110 SI | 110 DH | |
| 111 DI | 111 BH | |

“r/m” Field Bit Assignments

| r/m | Operand Address |
|-----|----------------------------|
| 000 | (BX) + (SI) + DISP |
| 001 | (BX) + (DI) + DISP |
| 010 | (BP) + (SI) + DISP |
| 011 | (BP) + (DI) + DISP |
| 100 | (SI) + DISP |
| 101 | (DI) + DISP |
| 110 | (BP) + DISP ⁽²⁾ |
| 111 | (BX) + DISP |

DISP follows 2nd byte of instruction (before data if required).

NOTES:

1. Opcode indicates presence and size of immediate field.
2. Except if mod=00 and r/m=110 then EA=disp-high: disp-low.

Figure B-2. /r Instruction Byte Format

+*rw*: A register code from 0 through 7 which is added to the hexadecimal byte given at the left of the plus sign to form a single opcode byte. The codes are: AX=0, CX=1, DX=2, BX=3, SP=4, BP=5, SI=6, and DI=7.

Instruction

This column gives the instruction mnemonic and possible operands. The type of operand used will determine the opcode and operand encodings. The following entries list the type of operand which can be encoded in the format shown in the instruction column. The Intel convention is to place the destination operand as the left hand operand. Source-only operands follow the destination operand.

In many cases, the same instruction can be encoded several ways. It is recommended that you use the shortest encoding. The short encodings are provided to save memory space.

cb: a destination instruction offset in the range of 128 bytes before the end of this instruction to 127 bytes after the end of this instruction.

cw: a destination offset within the same code segment as this instruction. Some instructions allow a short form of destination offset. See *cb* type for more information.

cd: a destination address, typically in a different code segment from this instruction. Using the *cd*: address form with call instructions saves the code segment selector.

db: a signed value between -128 and +127 inclusive which is an operand of the instruction. For instructions in which the *db* is to be combined in some way with a word operand, the immediate value is sign-extended to form a word. The upper byte of the word is filled with the topmost bit of the immediate value.

dw: an immediate word value which is an operand of the instruction.

eb: a byte-sized operand. This is either a byte register or a (possibly indexed) byte memory variable. Either operand location may be encoded in the ModRM field. Any memory addressing mode may be used.

ed: a memory-based pointer operand. Any memory addressing mode may be used. Use of a register addressing mode will cause exception 6.

ew: a word-sized operand. This is either a word register or a (possibly indexed) word memory variable. Either operand location may be encoded in the ModRM field. Any memory addressing mode may be used.

m: a memory location. Operands in registers do not have a memory address. Any memory addressing mode may be used. Use of a register addressing mode will cause exception 6.

mb: a memory-based byte-sized operand. Any memory addressing mode may be used.

mw: a memory-based word operand. Any memory addressing mode may be used.

rb: one of the byte registers AL, CL, DL, BL, AH, CH, DH, or BH; *rb* has the value 0,1,2,3,4,5,6, and 7, respectively.

rw: one of the word registers AX, CX, DX, BX, SP, BP, SI, or DI; *rw* has the value 0,1,2,3,4,5,6, and 7, respectively.

xb: a simple byte memory variable without a base or index register. MOV instructions between AL and memory have this optimized form if no indexing is required.

xw: a simple word memory variable without a base or index register. MOV instructions between AX and memory have this optimized form if no indexing is required.

Clocks

This column gives the number of clock cycles that this form of the instruction takes to execute. The amount of time for each clock cycle is computed by dividing one microsecond by the number of MHz at which the 80286 is running. For example, a 10-MHz 80286 (with the CLK pin connected to a 20-MHz crystal) takes 100 nanoseconds for each clock cycle.

Add one clock to instructions that use the base plus index plus displacement form of addressing. Add two clocks for each 16-bit memory based operand reference located on an odd physical address. Add one clock for each wait state added to each memory read. Wait states inserted in memory writes or instruction fetches do not necessarily increase execution time.

The clock counts establish the maximum execution rate of the 80286. With no delays in bus cycles, the actual clock count of an 80286 program will average 5-10% more than the calculated clock count due to instruction sequences that execute faster than they can be fetched from memory.

Some instruction forms give two clock counts, one unlabelled and one labelled. These counts indicate that the instruction has two different clock times for two different circumstances. Following are the circumstances for each possible label:

mem: The instruction has an operand that can either be a register or a memory variable. The unlabelled time is for the register; the *mem* time is for the memory variable. Also, one additional clock cycle is taken for indexed memory variables for which all three possible indices (base register, index register, and displacement) must be added.

noj: The instruction involves a conditional jump or interrupt. The unlabelled time holds

when the jump is made; the *noj* time holds when the jump is not made.

pm: If the instruction takes more time to execute when the 80286 is in Protected Mode. The unlabelled time is for Real Address Mode; the *pm* time is for Protected Mode.

Description

This is a concise description of the operation performed for this form of the instruction. More details are given in the "Operation" section that appears later in this chapter.

Flags Modified

This is a list of the flags that are set to a meaningful value by the instruction. If a flag is always set to the same value by the instruction, the value is given ("=0" or "=1") after the flag name.

Flags Undefined

This is a list of the flags that have an undefined (meaningless) setting after the instruction is executed.

All flags not mentioned under "Flags Modified" or "Flags Undefined" are unchanged by the instruction.

Operation

This section fully describes the operation performed by the instruction. For some of the more complicated instructions, suggested usage is also indicated.

Protected Mode Exceptions

The possible exceptions involved with this instruction when running under the iAPX 286 Protected Mode are listed below. These exceptions are abbreviated with a pound sign (#) followed by two capital letters and an optional error code in parenthesis. For example, #GP(0) denotes the general protection exception with an error code of zero. The

next section describes all of the iAPX 286 exceptions and the machine state upon entry to the exception.

If you are an applications programmer, consult the documentation provided with your operating system to determine what actions are taken by the system when exceptions occur.

Real Address Mode Exceptions

Since less error checking is performed by the iAPX 286 when it is in Real Address Mode, there are fewer exceptions in this mode. One exception that is possible in many instructions is #GP(0). Exception 13 is generated whenever a word operand is accessed from effective address 0FFFFH in a segment. This happens because the second byte of the word is considered located at location 10000H, not at location 0, and thus exceeds the segment's addressability limit.

Protection Exceptions

In parallel with the execution of instructions, the protected-mode iAPX 286 checks all memory references for validity of addressing and type of access. Violation of the memory protection rules built into the processor will cause a transfer of program control to one of the interrupt procedures described in this section. The interrupts have dedicated positions within the Interrupt Descriptor

Table, which is shown in table B-2. The interrupts are referenced within the instruction set pages by a pound sign (#) followed by a two-letter mnemonic and the optional error code in parenthesis.

Error Codes

Some exceptions cause the iAPX 286 to pass a 16-bit error code to the interrupt procedure. When this happens, the error code is the last item pushed onto the stack before control is transferred to the interrupt procedure. If stacks were switched as a result of the interrupt (causing a privilege change or task switch), the error code appears on the interrupt procedure's stack, not on the stack of the task that was interrupted.

The error code generally contains the selector of the segment that caused the protection violation. The RPL field (bottom two bits) of the error code does not, however, contain the privilege level. Instead, it contains the following information:

- Bit 0 contains the value 1 if the exception was detected during an interrupt caused by an event external to the program (i.e., an external interrupt, a single step, a processor extension not-present exception, or a processor extension segment overrun). Bit 0 is 0 if the exception was detected while processing the regular

Table B-2. Protection Exceptions of the iAPX 286

| Abbreviation | Interrupt Number | Description |
|--------------|------------------|----------------------------|
| #UD | 6 | Undefined Opcode |
| #NM | 7 | No Math Unit Available |
| #DF | 8 | Double Fault |
| #MP | 9 | Math Unit Protection Fault |
| #TS | 10 | Invalid Task State Segment |
| #NP | 11 | Not Present |
| #SS | 12 | Stack Fault |
| #GP | 13 | General Protection |
| #MF | 16 | Math Fault |

instruction stream, even if the instruction stream is part of an external interrupt handling procedure or task. If bit 0 is set, the instruction pointed to by the saved CS:IP address is not responsible for the error. The current task can be restarted unless this is exception 9.

- Bit 1 is 1 if the selector points to the Interrupt Descriptor Table. In this case, bit 2 can be ignored, and bits 3-10 contain the index into the IDT.
- Bit 1 is 0 if the selector points to the Global or Local Descriptor Tables. In this case, bits 2-15 have their usual selector interpretation: bit 2 selects the table (1=Local, 0=Global), and bits 3-15 are the index into the table.

In some cases the iAPX 286 chooses to pass an error code with no information in it. In these cases, all 16 bits of the error code are zero.

The existence and type of error codes are described under each of the following individual exceptions.

#DF 8 Double Fault (Zero Error Code)

This exception is generated when a second exception is detected while the processor is attempting to transfer control to the handler for an exception. For instance, it is generated if the code segment containing the exception handler is marked not present. It is also generated if invoking the exception handler causes a stack overflow.

This exception is not generated during the execution of an exception handler. Faults detected within the instruction stream are handled by regular exceptions.

The error code is normally zero. The saved CS:IP will point at the instruction that was attempting to execute when the double fault

occurred. Since the error code is normally zero, no information on the source of the exception is available. Restart is not possible.

If another exception is detected while attempting to perform the double fault exception, the iAPX 286 will enter shutdown (see section 11.5).

#GP 13 General Protection (Selector or Zero Error Code)

This exception is generated for all protection violations not covered by the other exceptions in this section. Examples of this include:

1. An attempt to address a memory location by using an offset that exceeds the limit for the segment involved.
2. An attempt to jump to a data segment.
3. An attempt to load SS with a selector for a read-only segment.
4. An attempt to write to a read-only segment.

If #GP occurred while loading a descriptor, the error code passed contains the selector involved. Otherwise, the error code is zero.

If the error code is not zero, the instruction can be restarted if the erroneous condition is rectified. If the error code is zero either a limit violation, a write protect violation, or an illegal use of invalid segment register occurred. An invalid segment register contains the values 0-3. A write protect fault on ADC, SBB, RCL, RCR, or XCHG is not restartable.

#MF 16 Math Fault (No Error Code)

This exception is generated when the numeric processor extension (the 80287) detects an error signalled by the ERROR input pin leading from the 80287 to the 80286. The ERROR pin is tested at the beginning of most

floating point instructions, and when a WAIT instruction is executed with the EM bit of the Machine Status Word set to 0 (i.e., no emulation of the math unit). The floating point instructions that do not cause the ERROR pin to be tested are FNCLEX, FNINIT, FSETPM, FNSTCW, FNSTSW, FNSAVE, and FNSTENV.

If the handler corrects the error condition causing the exception, the floating point instruction that caused #MF can be restarted. This is not accomplished by IRET, however, since the fault occurs at the floating point instruction that follows the offending instruction. Before restarting the numeric instruction, the handler must obtain from the 80287 the address of the offending instruction and the address of the optional numeric operand.

**#MP 9 Math Unit Protection Fault
(No Error Code)**

This exception is generated if the numeric operand is larger than one word and has the second or subsequent words outside the segment's limit. Not all math addressing errors cause exception 9. If the effective address of an ESCAPE instruction is not in the segment's limit, or if a write is attempted on a read-only segment, or if a one-word operand violates a segment limit, exception 13 will occur.

The #MP exception occurs during the execution of the numeric instruction by the 80287. Thus, the 80286 may be in an unrelated instruction stream at the time. Exception 9 may occur in a task unrelated to the task that executed the ESC instruction. The operating system should keep track of which task last used the NPX (see section 11.4).

The offending floating point instruction cannot be restarted; the task which attempted to execute the offending numeric instruction

must be aborted. However, if exception 9 interrupted another task, the interrupted task may be restarted.

The exception 9 handler *must* execute FNINIT before executing any ESCAPE or WAIT instruction.

**#NM 7 No Math Unit Available
(No Error Code)**

This exception occurs when any floating point instruction is executed while the EM bit or the TS bit of the Machine Status Word is 1. It also occurs when a WAIT instruction is encountered and both the MP and TS bits of the Machine Status Word are 1.

Depending on the setting of the MSW bits that caused this exception, the exception handler could provide emulation of the 80287, or it could perform a context switch of the math processor to prepare it for use by another task.

The instruction causing #NM can be restarted if the handler performs a numeric context switch. If the handler provided emulation of the math unit, it should advance the return pointer beyond the floating point instruction that caused NM.

#NP 11 Not Present (Selector Error Code)

This exception occurs when CS, DS, ES, or the Task Register is loaded with a descriptor that is marked not present but is otherwise valid. It can occur in an LLDT instruction, but the #NP exception will not occur if the processor attempts to load the LDT register during a task switch. A not-present LDT encountered during a task switch causes the #TS exception.

The error code passed is the selector of the descriptor that is marked not present.

Typically, the Not Present exception handler is used to implement a virtual memory system. The operating system can swap inactive memory segments to a mass-storage device such as a disk. Applications programs need not be told about this; the next time they attempt to access the swapped-out memory segment, the Not Present handler will be invoked, the segment will be brought back into memory, and the offending instruction within the applications program will be restarted.

If #NP is detected on loading CS, DS, or ES in a task switch, the exception occurs in the new task, and the IRET from the exception handler jumps directly to the next instruction in the new task.

The Not Present exception handler must contain special code to complete the loading of segment registers when #NP is detected in loading the CS or DS registers in a task switch and a trap or interrupt gate was used. The DS and ES registers have been loaded but their descriptors have not been loaded. Any memory reference using the segment register may cause exception 13. The #NP exception handler should execute code such as the following to ensure full loading of the segment registers:

```
MOV AX,DS
MOV DS,AX
MOV AX,ES
MOV ES,AX
```

#SS 12 Stack Fault (Selector or Zero Error Code)

This exception is generated when a limit violation is detected in addressing through the SS register. It can occur on stack-oriented instructions such as PUSH or POP, as well as other types of memory references using SS such as MOV AX,[BP+28]. It also can occur

on an ENTER instruction when there is not enough space on the stack for the indicated local variable space, even if the stack exception is not triggered by pushing BP or copying the display stack. A stack exception can therefore indicate a stack overflow, a stack underflow or a wild offset. The error code will be zero.

#SS is also generated on an attempt to load SS with a descriptor that is marked not present but is otherwise valid. This can occur in a task switch, an inter-level call, an inter-level return, a move to the SS instruction or a pop to the SS instruction. The error code will be non-zero.

#SS is never generated when addressing through the DS or ES registers even if the offending register points to the same segment as the SS register.

The #SS exception handler must contain special code to complete the loading of segment registers. The DS and ES registers will not be fully loaded if a not-present condition is detected while loading the SS register. Therefore, the #SS exception handler should execute code such as the following to insure full loading of the segment registers:

```
MOV AX,DS
MOV DS,AX
MOV AX,ES
MOV ES,AX
```

Generally, the instruction causing #SS can be restarted, but there is one special case when it cannot: when a PUSHA or POPA instruction attempts to wrap around the 64K boundary of a stack segment. This condition is identified by the value of the saved SP, which can be either 0000H, 0001H, 0FFFEH, or 0FFFFH.

#TS 10 Invalid Task State Segment (Selector Error Code)

This exception is generated when a task state segment is invalid, that is, when a task state segment is too small; when the LDT indicated in a TSS is invalid or not present; when the SS, CS, DS, or ES indicated in a TSS are invalid (task switch); when a TSS indicated an invalid privileged stack (inter-level call); or when the back link in a TSS is invalid (inter-task IRET).

#TS is not generated when the SS, CS, DS, or ES back link or privileged stack selectors point to a descriptor that is not present but otherwise is valid. #NP is generated in these cases.

The error code passed to the exception handler contains the selector of the offending segment, which can either be the Task State Segment itself, or a selector found within the Task State Segment.

The instruction causing #TS can be restarted.

#TS must be handled through a task gate.

#UD 6 Undefined Opcode (No Error Code)

This exception is generated when an invalid operation code is detected in the instruction stream. Following are the cases in which #UD can occur:

1. The first byte of an instruction is completely invalid (e.g., 64H).
2. The first byte indicates a 2-byte opcode and the second byte is invalid (e.g., 0FH followed by 0FFH).
3. An invalid register is used with an otherwise valid opcode (e.g., MOV CS,AX).
4. An invalid opcode extension is given in the REG field of the ModRM byte (e.g., 0F6H /1).

5. A register operand is given in an instruction that requires a memory operand (e.g., LGDT AX).

Since the offending opcode will always be invalid, it cannot be restarted. However, the #UD handler might be coded to implement an extension of the iAPX 286 instruction set. In that case, the handler could advance the return pointer beyond the extended instruction and return control to the program after the extended instruction is emulated. *Any such extensions may be incompatible with iAPX 386.*

Privilege Level and Task Switching on the iAPX 286

The iAPX 286 supports many of the functions necessary to implement a protected, multi-tasking operating system in hardware. This support is provided not by additional instructions, but by extension of the semantics of iAPX 86/88 instructions that change the value of CS:IP.

Whenever the iAPX 286 performs an inter-segment jump, call, interrupt, or return, it consults the Access Rights (AR) byte found in the descriptor table entry of the selector associated with the new CS value. The AR byte determines whether the long jump being made is through a gate, or is a task switch, or is a simple long jump to the same privilege level. Table B-3 lists the possible values of the AR byte. The "privilege" headings at the top of the table give the Descriptor Privilege Level, which is referred to as the DPL within the instruction descriptions.

Each of the CALL, INT, IRET, JMP, and RET instructions contains on its instruction set pages a listing of the access rights checking and actions taken to implement the instruction. Instructions involving task switches contain the symbol SWITCH_TASKS, which is an abbreviation for the following list of checks and actions:

THE iAPX 286 INSTRUCTION SET

SWITCH_TASKS:

Locked set AR byte of new TSS descriptor to Busy TSS (Bit 1 = 1)
Current TSS cache must be valid with limit ≥ 43 else #TS (error code will be new TSS, but back link points at old TSS)
New TSS limit ≥ 43 else #TS (new TSS)
Save machine state in current TSS
If nesting tasks, set the new TSS link to the current TSS selector
Any exception will be in new context Else set the AR byte of current TSS descriptor to Available TSS (Bit 1 = 0)
Set the current TR to selector, base, and limit of new TSS
Set all machine registers to values from new TSS without loading descriptors for DS, ES, CS, SS, LDT
Clear valid flags for LDT, SS, CS, DS, ES (not valid yet)
Set the Task Switched flag to 1
If nesting tasks, set the Nested Task flag to 1
LDT from the new TSS must be within GDT table limits else #TS(LDT)
AR byte from LDT descriptor must specify LDT segment else #TS(LDT)
AR byte from LDT descriptor must indicate PRESENT else #TS(LDT)
Load LDT cache with new LDT descriptor and set valid bit
Set CPL to the RPL of the CS selector in the new TSS
If new stack selector is null #TS(SS)
SS selector must be within its descriptor table limits else #TS(SS)
SS selector RPL must be equal to CPL else #TS(SS)
DPL of SS descriptor must equal CPL else #TS(SS)
SS descriptor AR byte must indicate writable data segment else #TS(SS)
SS descriptor AR byte must indicate PRESENT else #SS(SS)
Load SS cache with new stack segment and set valid bit
New CS selector must not be null else #TS(CS)
CS selector must be within its descriptor table limits else #TS(CS)
CS descriptor AR byte must indicate code segment else #TS(CS)
If non-conforming then DPL must equal CPL else #TS(CS)
If conforming then DPL must be \leq CPL else #TS(CS)
CS descriptor AR byte must indicate PRESENT else #NP(CS)
Load CS cache with new code segment descriptor and set valid bit
For DS and ES:
If new selector is not null then perform following checks:
Index must be within its descriptor table limits else #TS(segment selector)
AR byte must indicate data or readable code else #TS(segment selector)
If data or non-conforming code then:
DPL must be \geq CPL else #TS(segment selector)
DPL must be \geq RPL else #TS(segment selector)
AR byte must indicate PRESENT else #NP(segment selector)
Load cache with new segment descriptor and set valid bit

THE IAPX 286 INSTRUCTION SET

Table B-3. Hexadecimal Values for the Access Rights Byte

| Not present, privilege= | | | | Present, privilege= | | | | Descriptor Type |
|----------------------------|----|----|----|------------------------|----|----|----|---|
| 0 | 1 | 2 | 3 | 0 | 1 | 2 | 3 | |
| 00 | 20 | 40 | 60 | 80 | A0 | C0 | E0 | Illegal |
| 01 | 21 | 41 | 61 | 81 | A1 | C1 | E1 | Available Task State Segment |
| 02 | 22 | 42 | 62 | 82 | A2 | C2 | E2 | Local Descriptor Table Segment |
| 03 | 23 | 43 | 63 | 83 | A3 | C3 | E3 | Busy Task State Segment |
| 04 | 24 | 44 | 64 | 84 | A4 | C4 | E4 | Call Gate |
| 05 | 25 | 45 | 65 | 85 | A5 | C5 | E5 | Task Gate |
| 06 | 26 | 46 | 66 | 86 | A6 | C6 | E6 | Interrupt Gate |
| 07 | 27 | 47 | 67 | 87 | A7 | C7 | E7 | Trap Gate |
| 08 | 28 | 48 | 68 | 88 | A8 | C8 | E8 | Illegal |
| 09 | 29 | 49 | 69 | 89 | A9 | C9 | E9 | Illegal |
| 0A | 2A | 4A | 6A | 8A | AA | CA | EA | Illegal |
| 0B | 2B | 4B | 6B | 8B | AB | CB | EB | Illegal |
| 0C | 2C | 4C | 6C | 8C | AC | CC | EC | Illegal |
| 0D | 2D | 4D | 6D | 8D | AD | CD | ED | Illegal |
| 0E | 2E | 4E | 6E | 8E | AE | CE | EE | Illegal |
| 0F | 2F | 4F | 6F | 8F | AF | CF | EF | Illegal |
| 10 | 30 | 50 | 70 | 90 | B0 | D0 | F0 | Expand-up, read only, ignored Data Segment |
| 11 | 31 | 51 | 71 | 91 | B1 | D1 | F1 | Expand-up, read only, accessed Data Segment |
| 12 | 32 | 52 | 72 | 92 | B2 | D2 | F2 | Expand-up, writable, ignored Data Segment |
| 13 | 33 | 53 | 73 | 93 | B3 | D3 | F3 | Expand-up, writable, accessed Data Segment |
| 14 | 34 | 54 | 74 | 94 | B4 | D4 | F4 | Expand-down, read only, ignored Data Segment |
| 15 | 35 | 55 | 75 | 95 | B5 | D5 | F5 | Expand-down, read only, accessed Data Segment |
| 16 | 36 | 56 | 76 | 96 | B6 | D6 | F6 | Expand-down, writable, ignored Data Segment |
| 17 | 37 | 57 | 77 | 97 | B7 | D7 | F7 | Expand-down, writable, accessed Data Segment |
| 18 | 38 | 58 | 78 | 98 | B8 | D8 | F8 | Non-conform, no read, ignored Code Segment |
| 19 | 39 | 59 | 79 | 99 | B9 | D9 | F9 | Non-conform, no read, accessed Code Segment |
| 1A | 3A | 5A | 7A | 9A | BA | DA | FA | Non-conform, readable, ignored Code Segment |
| 1B | 3B | 5B | 7B | 9B | BB | DB | FB | Non-conform, readable, accessed Code Segment |
| 1C | 3C | 5C | 7C | 9C | BC | DC | FC | Conforming, no read, ignored Code Segment |
| 1D | 3D | 5D | 7D | 9D | BD | DD | FD | Conforming, no read, accessed Code Segment |
| 1E | 3E | 5E | 7E | 9E | BE | DE | FE | Conforming, readable, ignored Code Segment |
| 1F | 3F | 5F | 7F | 9F | BF | DF | FF | Conforming, readable, accessed Code Segment |

AAA—ASCII Adjust AL After Addition

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--------------------------------|
| 37 | AAA | 3 | ASCII adjust AL after addition |

FLAGS MODIFIED

Auxiliary carry, carry

FLAGS UNDEFINED

Overflow, sign, zero, parity

OPERATION

AAA should be executed only after an ADD instruction which leaves a byte result in the AL register. The lower nibbles of the operands to the ADD instruction should be in the range 0 through 9 (BCD digits). In this case, the AAA instruction will adjust AL to contain the correct decimal digit result. If the addition produced a decimal carry, the AH register is incremented, and the carry and auxiliary carry flags are set to 1. If there was no decimal carry, the carry and auxiliary carry flags are set to 0, and AH is unchanged. In

any case, AL is left with its top nibble set to 0. To convert AL to an ASCII result, you can follow the AAA instruction with OR AL,30H.

The precise definition of AAA is as follows: if the lower 4 bits of AL are greater than nine, or if the auxiliary carry flag is 1, then increment AL by 6, AH by 1, and set the carry and auxiliary carry flags. Otherwise, reset the carry and auxiliary carry flags. In any case, conclude the AAA operation by setting the upper four bits of AL to zero.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

AAD—ASCII Adjust AX Before Division

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---------------------------------|
| D5 0A | AAD | 14 | ASCII adjust AX before division |

FLAGS MODIFIED

Sign, zero, parity

FLAGS UNDEFINED

Overflow, auxiliary carry, carry

OPERATION

AAD is used to prepare two unpacked BCD digits (least significant in AL, most significant in AH) for a division operation which will yield an unpacked result. This is accom-

plished by setting AL to $AL + (10 \times AH)$, and then setting AH to 0. This leaves AX equal to the binary equivalent of the original unpacked 2-digit number.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

AAM—ASCII Adjust AX After Multiply

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--------------------------------|
| D4 0A | AAM | 16 | ASCII adjust AX after multiply |

FLAGS MODIFIED

Sign, zero, parity

FLAGS UNDEFINED

Overflow, auxiliary carry, carry

OPERATION

AAM should be used only after executing a MUL instruction between two unpacked BCD digits, leaving the result in the AX register. Since the result is less than one hundred, it is

contained entirely in the AL register. AAM unpacks the AL result by dividing AL by ten, leaving the quotient (most significant digit) in AH, and the remainder (least significant digit) in AL.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

AAS—ASCII Adjust AL After Subtraction

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|-----------------------------------|
| 3F | AAS | 3 | ASCII adjust AL after subtraction |

FLAGS MODIFIED

Auxiliary carry, carry

FLAGS UNDEFINED

Overflow, sign, zero, parity

OPERATION

AAS should be executed only after a subtraction instruction which left the byte result in the AL register. The lower nibbles of the operands to the SUB instruction should have been in the range 0 through 9 (BCD digits). In this case, the AAS instruction will adjust AL to contain the correct decimal digit result. If the subtraction produced a decimal carry, the AH register is decremented, and the carry and auxiliary carry flags are set to 1. If there was no decimal carry, the carry and auxiliary carry flags are set to 0, and AH is unchanged.

In any case, AL is left with its top nibble set to 0. To convert AL to an ASCII result, you can follow the AAS instruction with OR AL,30H.

The precise definition of AAS is as follows: if the lower four bits of AL are greater than 9, or if the auxiliary carry flag is 1, then decrement AL by 6, AH by 1, and set the carry and auxiliary carry flags. Otherwise, reset the carry and auxiliary carry flags. In any case, conclude the AAS operation by setting the upper four bits of AL to zero.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

ADC / ADD—Integer Addition

| Opcode | Instruction | Clocks | Description |
|--------|-------------------------------|---------|--|
| 10 | <i>/r</i> ADC <i>eb,rb</i> | 2,mem=7 | Add with carry byte register into EA byte |
| 11 | <i>/r</i> ADC <i>ew,rw</i> | 2,mem=7 | Add with carry word register into EA word |
| 12 | <i>/r</i> ADC <i>rb,eb</i> | 2,mem=7 | Add with carry EA byte into byte register |
| 13 | <i>/r</i> ADC <i>rw,ew</i> | 2,mem=7 | Add with carry EA word into word register |
| 14 | <i>db</i> ADC AL, <i>db</i> | 3 | Add with carry immediate byte into AL |
| 15 | <i>dw</i> ADC AX, <i>dw</i> | 3 | Add with carry immediate word into AX |
| 80 | <i>/2 db</i> ADC <i>eb,db</i> | 3,mem=7 | Add with carry immediate byte into EA byte |
| 81 | <i>/2 dw</i> ADC <i>ew,dw</i> | 3,mem=7 | Add with carry immediate word into EA word |
| 83 | <i>/2 db</i> ADC <i>ew,db</i> | 3,mem=7 | Add with carry immediate byte into EA word |
| 00 | <i>/r</i> ADD <i>eb,rb</i> | 2,mem=7 | Add byte register into EA byte |
| 01 | <i>/r</i> ADD <i>ew,rw</i> | 2,mem=7 | Add word register into EA word |
| 02 | <i>/r</i> ADD <i>rb,eb</i> | 2,mem=7 | Add EA byte into byte register |
| 03 | <i>/r</i> ADD <i>rw,ew</i> | 2,mem=7 | Add EA word into word register |
| 04 | <i>db</i> ADD AL, <i>db</i> | 3 | Add immediate byte into AL |
| 05 | <i>dw</i> ADD AX, <i>dw</i> | 3 | Add immediate word into AX |
| 80 | <i>/0 db</i> ADD <i>eb,db</i> | 3,mem=7 | Add immediate byte into EA byte |
| 81 | <i>/0 dw</i> ADD <i>ew,dw</i> | 3,mem=7 | Add immediate word into EA word |
| 83 | <i>/0 db</i> ADD <i>ew,db</i> | 3,mem=7 | Add immediate byte into EA word |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

None

OPERATION

ADD and ADC perform an integer addition on the two operands. The ADC instruction also adds in the initial state of the carry flag. The result of the addition goes to the first operand. ADC is usually executed as part of a multi-byte or multi-word addition operation.

When a byte immediate value is added to a word operand, the immediate value is first sign-extended.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

AND—Logical AND

| Opcode | Instruction | Clocks | Description |
|--------|-------------------------------|---------|---|
| 20 | <i>/r</i> AND <i>eb,rb</i> | 2,mem=7 | Logical-AND byte register into EA byte |
| 21 | <i>/r</i> AND <i>ew,rw</i> | 2,mem=7 | Logical-AND word register into EA word |
| 22 | <i>/r</i> AND <i>rb,eb</i> | 2,mem=7 | Logical-AND EA byte into byte register |
| 23 | <i>/r</i> AND <i>rw,ew</i> | 2,mem=7 | Logical-AND EA word into word register |
| 24 | <i>db</i> AND <i>AL,db</i> | 3 | Logical-AND immediate byte into AL |
| 25 | <i>dw</i> AND <i>AX,dw</i> | 3 | Logical-AND immediate word into AX |
| 80 | <i>/4 db</i> AND <i>eb,db</i> | 3,mem=7 | Logical-AND immediate byte into EA byte |
| 81 | <i>/4 dw</i> AND <i>ew,dw</i> | 3,mem=7 | Logical-AND immediate word into EA word |

FLAGS MODIFIED

Overflow=0, sign, zero, parity, carry=0

FLAGS UNDEFINED

Auxiliary carry

OPERATION

Each bit of the result is a 1 if both corresponding bits of the operands were 1; it is 0 otherwise.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

ARPL—Adjust RPL Field of Selector

| Opcode | Instruction | Clocks | Description |
|--------------|-------------------|-----------|--|
| 63 <i>/r</i> | ARPL <i>ew,rw</i> | 10,mem=11 | Adjust RPL of EA word not less than RPL of <i>rw</i> |

FLAGS MODIFIED

Zero

FLAGS UNDEFINED

None

OPERATION

The ARPL instruction has two operands. The first operand is a 16-bit memory variable or word register that contains the value of a selector. The second operand is a word register. If the RPL field (bottom two bits) of the first operand is less than the RPL field of the second operand, then the zero flag is set to 1 and the RPL field of the first operand is increased to match the second RPL. Otherwise, the zero flag is set to 0 and no change is made to the first operand.

ARPL appears in operating systems software, not in applications programs. It is used to guarantee that a selector parameter to a subroutine does not request more privilege than the caller was entitled to. The second operand used by ARPL would normally be a register that contains the CS selector value of the caller.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 6. ARPL is not recognized in Real Address mode.

BOUND—Check Array Index Against Bounds

| Opcode | Instruction | Clocks | Description |
|--------|--------------------|--------|--------------------------------------|
| 62 /r | BOUND <i>rw,md</i> | noj=13 | INT 5 if <i>rw</i> not within bounds |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

BOUND is used to ensure that a signed array index is within the limits defined by a two-word block of memory. The first operand (a register) must be greater than or equal to the first word in memory, and less than or equal to the second word in memory. If the register is not within the bounds, an INTERRUPT 5 occurs.

The two-word block might typically be found just before the array itself and therefore would be accessible at a constant offset of -4 from the array, simplifying the addressing.

PROTECTED MODE EXCEPTIONS

INTERRUPT 5 if the bounds test fails, as described above. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

The second operand must be a memory operand, not a register. If the BOUND instruction is executed with a ModRM byte representing a register second operand, then fault #UD will occur.

REAL ADDRESS MODE EXCEPTIONS

INTERRUPT 5 if the bounds test fails, as described above. Interrupt 13 for a second operand at offset 0FFFDH or higher. Interrupt 6 if the second operand is a register, as described in the paragraph above.

CALL—Call Procedure

| Opcode | Instruction | Clocks* | Description |
|--------------|----------------|-----------|--|
| E8 <i>cw</i> | CALL <i>cw</i> | 7 | Call near, offset relative to next instruction |
| FF /2 | CALL <i>ew</i> | 7,mem=11 | Call near, offset absolute at EA word |
| 9A <i>cd</i> | CALL <i>cd</i> | 13,pm=26 | Call inter-segment, immediate 4-byte address |
| 9A <i>cd</i> | CALL <i>cd</i> | 41 | Call gate, same privilege |
| 9A <i>cd</i> | CALL <i>cd</i> | 82 | Call gate, more privilege, no parameters |
| 9A <i>cd</i> | CALL <i>cd</i> | 86+4X | Call gate, more privilege, X parameters |
| 9A <i>cd</i> | CALL <i>cd</i> | 177 | Call via Task State Segment |
| 9A <i>cd</i> | CALL <i>cd</i> | 182 | Call via task gate |
| FF /3 | CALL <i>ed</i> | 16,mem=29 | Call inter-segment, address at EA doubleword |
| FF /3 | CALL <i>ed</i> | 44 | Call gate, same privilege |
| FF /3 | CALL <i>ed</i> | 83 | Call gate, more privilege, no parameters |
| FF /3 | CALL <i>ed</i> | 90+4X | Call gate, more privilege, X parameters |
| FF /3 | CALL <i>ed</i> | 180 | Call via Task State Segment |
| FF /3 | CALL <i>ed</i> | 185 | Call via task gate |

*Add one clock for each byte in the next instruction executed.

FLAGS MODIFIED

None, except when a task switch occurs

FLAGS UNDEFINED

None

OPERATION

The CALL instruction causes the procedure named in the operand to be executed. When the procedure is complete (a return instruction is executed within the procedure), execution continues at the instruction that follows the CALL instruction.

The CALL *cw* form of the instruction adds modulo 65536 (the 2-byte operand) to the offset of the instruction following the CALL and sets IP to the resulting offset. The 2-byte offset of the instruction that follows the CALL is pushed onto the stack. It will be popped by a near RET instruction within the procedure. The CS register is not changed by this form.

The CALL *ew* form of the instruction is the same as CALL *cw* except that the operand specifies a memory location from which the

absolute 2-byte offset for the procedure is fetched.

The CALL *cd* form of the instruction uses the 4-byte operand as a pointer to the procedure called. The CALL *ed* form fetches the long pointer from the memory location specified. Both long pointer forms consult the AR byte in the descriptor indexed by the selector part of the long pointer. The AR byte can indicate one of the following descriptor types:

1. Code Segment—The access rights are checked, the return pointer is pushed onto the stack, and the procedure is jumped to.
2. Call Gate—The offset part of the pointer is ignored. Instead, the entire address of the procedure is taken from the call gate descriptor entry. If the routine being entered is more privileged, then a new stack (both SS and SP) is loaded from the task state segment for the new privilege level, and parameters determined by the wordcount field of the call gate are copied from the old stack to the new stack.

3. Task Gate—The current task's context is saved in its Task State Segment (TSS), and the TSS named in the task-gate is used to load the new context. The selector for the outgoing task (from TR) is stored into the new TSS's link field, and the new task's Nested Task flag is set. The outgoing task is left marked busy, the new TSS is marked busy, and execution resumes at the point at which the new task was last suspended.
4. Task State Segment—The current task is suspended and the new task initiated as in 3 above except that there is no intervening gate.

For long calls involving no task switch, the return link is the pointer of the instruction that follows the CALL, i.e., the caller's CS and updated IP. Task switches invoked by CALLs are linked by storing the outgoing task's TSS selector in the incoming TSS's link field and setting the Nested Task flag in the new task. Nested tasks must be terminated by an IRET. IRET releases the nested task and follows the back link to the calling task if the NT flag is set.

A precise list of the protection checks made and the actions taken is given by the following list:

CALL FAR:

If indirect then check access of EA doubleword #GP(0) if limit violation
 New CS selector must not be null else #GP(0)
 Check that new CS selector index is within its descriptor table limits; else #GP (new CS selector)
 Examine AR byte of selected descriptor for various legal values:

CALL CONFORMING CODE SEGMENT:

DPL must be \leq CPL else #GP (code segment selector)
 Segment must be PRESENT else #NP (code segment selector)
 Stack must be big enough for return address else #SS(0)
 IP must be in code segment limit else #GP(0)
 Load code segment descriptor into CS cache
 Load CS with new code segment selector
 Load IP with new offset

CALL NONCONFORMING CODE SEGMENT:

RPL must be \leq CPL else #GP (code segment selector)
 DPL must be = CPL else #GP (code segment selector)
 Segment must be PRESENT else #NP (code segment selector)
 Stack must be big enough for return address else #SS(0)
 IP must be in code segment limit else #GP(0)
 Load code segment descriptor into CS cache
 Load CS with new code segment selector
 Set RPL of CS to CPL
 Load IP with new offset

CALL TO CALL GATE:

Call gate DPL must be \geq CPL else #GP (call gate selector)
 Call gate DPL must be \geq RPL else #GP (call gate selector)
 Call gate must be PRESENT else #NP (call gate selector)
 Examine code segment selector in call gate descriptor:
 Selector must not be null else #GP(0)
 Selector must be within its descriptor table limits else #GP (code segment selector)
 AR byte of selected descriptor must indicate code segment else #GP (code segment selector)
 DPL of selected descriptor must be \leq CPL else #GP (code segment selector)
 If non-conforming code segment and DPL < CPL then

CALL GATE TO MORE PRIVILEGE:

Get new SS selector for new privilege level from TSS

Check selector and descriptor for new SS:

- Selector must not be null else #TS(0)
- Selector index must be within its descriptor table limits else #TS (SS selector)
- Selector's RPL must equal DPL of code segment else #TS (SS selector)
- Stack segment DPL must equal DPL of code segment else #TS (SS selector)
- Descriptor must indicate writable data segment else #TS (SS selector)
- Segment PRESENT else #SS (SS selector)

New stack must have room for parameters plus 8 bytes else #SS(0)

- IP must be in code segment limit else #GP(0)
- Load new SS:SP value from TSS
- Load new CS:IP value from gate
- Load CS descriptor
- Load SS descriptor
- Push long pointer of old stack onto new stack
- Get word count from call gate, mask to 5 bits
- Copy parameters from old stack onto new stack
- Push return address onto new stack
- Set CPL to stack segment DPL
- Set RPL of CS to CPL

Else

CALL GATE TO SAME PRIVILEGE:

- Stack must have room for 4-byte return address else #SS(0)
- IP must be in code segment limit else #GP(0)
- Load CS:IP from gate
- Push return address onto stack
- Load code segment descriptor into CS-cache
- Set RPL of CS to CPL

CALL TASK GATE:

- Task gate DPL must be \geq CPL else #GP (gate selector)
- Task gate DPL must be \geq RPL else #GP (gate selector)
- Task Gate must be PRESENT else #NP (gate selector)
- Examine selector to TSS, given in Task Gate descriptor:
 - Must specify global in the local/global bit else #GP (TSS selector)
 - Index must be within GDT limits else #GP (TSS selector)
 - TSS descriptor AR byte must specify available TSS (bottom bits 00001) else #GP (TSS selector)
 - Task State Segment must be PRESENT else #NP (TSS selector)
- SWITCH_TASKS with nesting to TSS
- IP must be in code segment limit else #GP(0)

TASK STATE SEGMENT:

- TSS DPL must be \geq CPL else #GP (TSS selector)
- TSS DPL must be \geq RPL else #GP (TSS selector)
- TSS descriptor AR byte must specify available TSS else #GP (TSS selector)
- Task State Segment must be PRESENT else #NP (TSS selector)
- SWITCH_TASKS with nesting to TSS
- IP must be in code segment limit else #GP(0)

ELSE #GP (code segment selector)

PROTECTED MODE EXCEPTIONS

FAR calls: #GP, #NP, #SS, and #TS, as indicated in the list above.

NEAR direct calls: #GP(0) if procedure location is beyond the code segment limits.

NEAR indirect CALL: #GP(0) for an illegal memory operand effective address in the CS,

DS, or ES segments; #SS(0) for an illegal address in the SS segment. #GP if the indirect offset obtained is beyond the code segment limits.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

CBW—Convert Byte into Word

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---|
| 98 | CBW | 2 | Convert byte into word (AH = top bit of AL) |

FLAGS MODIFIED

None

signed word in AX. It does so by extending the top bit of AL into all of the bits of AH.

FLAGS UNDEFINED

None

PROTECTED MODE EXCEPTIONS

None

OPERATION

CBW converts the signed byte in AL to a

REAL ADDRESS MODE EXCEPTIONS

None

CLC—Clear Carry Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|------------------|
| F8 | CLC | 2 | Clear carry flag |

FLAGS MODIFIED

Carry=0

FLAGS UNDEFINED

None

OPERATION

CLC sets the carry flag to zero. No other flags or registers are affected.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

CLD—Clear Direction Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--|
| FC | CLD | 2 | Clear direction flag, SI and DI will increment |

FLAGS MODIFIED

Direction=0

FLAGS UNDEFINED

None

OPERATION

CLD clears the direction flag. No other flags

or registers are affected. After CLD is executed, string operations will increment the index registers (SI and/or DI) that they use.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

CLI—Clear Interrupt Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---|
| FA | CLI | 3 | Clear interrupt flag; interrupts disabled |

FLAGS MODIFIED

Interrupt = 0

FLAGS UNDEFINED

None

OPERATION

CLI clears the interrupt enable flag if the current privilege level is at least as privileged as IOPL. No other flags are affected. External interrupts will not be recognized at the

end of the CLI instruction or thereafter until the interrupt flag is set.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is bigger (has less privilege) than the IOPL in the flags register. IOPL specifies the least privileged level at which I/O may be performed.

REAL ADDRESS MODE EXCEPTIONS

None

CLTS—Clear Task Switched Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--------------------------|
| 0F 06 | CLTS | 2 | Clear task switched flag |

FLAGS MODIFIED

Task switched=0

FLAGS UNDEFINED

None

OPERATION

CLTS clears the task switched flag in the Machine Status Word. This flag is set by the iAPX 286 every time a task switch occurs. The TS flag is used to manage processor extensions as follows: every execution of a WAIT or an ESC instruction will be trapped if the MP flag of MSW is set and the task switched flag is set. Thus, if a processor extension is present and a task switch has been made since the last ESC instruction was begun, the processor extension's context must be saved before a new instruction can be

issued. The fault routine will save the context and reset the task switched flag or place the task requesting the processor extension into a queue until the current processor extension instruction is completed.

CLTS appears in operating systems software, not in applications programs. It is a privileged instruction that can only be executed at level 0.

PROTECTED MODE EXCEPTIONS

#GP(0) if CLTS is executed with a current privilege level other than 0.

REAL ADDRESS MODE EXCEPTIONS

None (valid in REAL ADDRESS MODE to allow power-up initialization for Protected Mode)

CMC—Complement Carry Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|-----------------------|
| F5 | CMC | 2 | Complement carry flag |

FLAGS MODIFIED

Carry

PROTECTED MODE EXCEPTIONS

None

FLAGS UNDEFINED

None

REAL ADDRESS MODE EXCEPTIONS

None

OPERATION

CMC reverses the setting of the carry flag.
No other flags are affected.

CMP—Compare Two Operands

| Opcode | Instruction | Clocks | Description |
|-----------------|------------------|---------|-------------------------------------|
| 3C <i>db</i> | CMP <i>AL,db</i> | 3 | Compare immediate byte from AL |
| 3D <i>dw</i> | CMP <i>AX,dw</i> | 3 | Compare immediate word from AX |
| 80 <i>/7 db</i> | CMP <i>eb,db</i> | 3,mem=6 | Compare immediate byte from EA byte |
| 38 <i>/r</i> | CMP <i>eb,rb</i> | 2,mem=7 | Compare byte register from EA byte |
| 83 <i>/7 db</i> | CMP <i>ew,db</i> | 3,mem=6 | Compare immediate byte from EA word |
| 81 <i>/7 dw</i> | CMP <i>ew,dw</i> | 3,mem=6 | Compare immediate word from EA word |
| 39 <i>/r</i> | CMP <i>ew,rw</i> | 2,mem=7 | Compare word register from EA word |
| 3A <i>/r</i> | CMP <i>rb,eb</i> | 2,mem=6 | Compare EA byte from byte register |
| 3B <i>/r</i> | CMP <i>rw,ew</i> | 2,mem=6 | Compare EA word from word register |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

None

OPERATION

CMP subtracts the second operand from the first operand, but it does not place the result anywhere. Only the flags are changed by this instruction. CMP is usually followed by a conditional jump instruction. See the “Jcond” instructions in this chapter for the list of

signed and unsigned flag tests provided by the iAPX 286.

If a word operand is compared to an immediate byte value, the byte value is first sign-extended.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

CMPS/CMPSB/CMPSW—Compare string operands

| Opcode | Instruction | Clocks | Description |
|--------|-------------------|--------|------------------------------------|
| A6 | CMPS <i>mb,mb</i> | 8 | Compare bytes ES:[DI] from [SI] |
| A6 | CMPSB | 8 | Compare bytes ES:[DI] from DS:[SI] |
| A7 | CMPSW | 8 | Compare words ES:[DI] from DS:[SI] |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

None

OPERATION

CMPS compares the byte or word pointed to by SI with the byte or word pointed to by DI by performing the subtraction [SI] - [DI]. The result is not placed anywhere; only the flags reflect the result of the subtraction. The types of the operands to CMPS determine whether bytes or words are compared. The segment addressability of the first (SI) operand determines whether a segment override byte will be produced or whether the default segment register DS is used. The second (DI) operand must be addressable from the ES register; no segment override is possible.

After the comparison is made, both SI and DI are automatically advanced. If the direction flag is 0 (CLD was executed), the registers increment; if the direction flag is 1 (STD was executed), the registers decrement. The registers increment or decrement by 1 if a byte was moved; by 2 if a word was moved.

CMPS can be preceded by the REPE or REPNE prefix for block comparison of CX bytes or words. Refer to the REP instruction for details of this operation.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments;
 #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

CWD—Convert Word to Doubleword

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---|
| 99 | CWD | 2 | Convert word to doubleword (DX:AX = AX) |

FLAGS MODIFIED

None

extending the top bit of AX into all the bits of DX.

FLAGS UNDEFINED

None

PROTECTED MODE EXCEPTIONS

None

OPERATION

CWD converts the signed word in AX to a signed doubleword in DX:AX. It does so by

REAL ADDRESS MODE EXCEPTIONS

None

DAA—Decimal Adjust AL After Addition

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|----------------------------------|
| 27 | DAA | 3 | Decimal adjust AL after addition |

FLAGS MODIFIED

Sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

Overflow

OPERATION

DAA should be executed only after an ADD instruction which leaves a two-BCD-digit byte result in the AL register. The ADD operands should consist of two packed BCD digits. In this case, the DAA instruction will adjust AL to contain the correct two-digit packed decimal result.

The precise definition of DAA is as follows:

1. If the lower 4 bits of AL are greater than nine, or if the auxiliary carry flag is 1, then increment AL by 6, and set the auxiliary carry flag. Otherwise, reset the auxiliary carry flag.
2. If AL is now greater than 9FH, or if the carry flag is set, then increment AL by 60H, and set the carry flag. Otherwise, clear the carry flag.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

DAS—Decimal Adjust AL After Subtraction

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|-------------------------------------|
| 2F | DAS | 3 | Decimal adjust AL after subtraction |

FLAGS MODIFIED

Sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

Overflow

OPERATION

DAS should be executed only after a subtraction instruction which leaves a two-BCD-digit byte result in the AL register. The operands should consist of two packed BCD digits. In this case, the DAS instruction will adjust AL to contain the correct packed two-digit decimal result.

The precise definition of DAS is as follows:

1. If the lower four bits of AL are greater than 9, or if the auxiliary carry flag is 1, then decrement AL by 6, and set the auxiliary carry flag. Otherwise, reset the auxiliary carry flag.
2. If AL is now greater than 9FH, or if the carry flag is set, then decrement AL by 60H, and set the carry flag. Otherwise, clear the carry flag.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

DEC—Decrement by 1

| Opcode | Instruction | Clocks | Description |
|---------------|---------------|---------|------------------------------|
| FE /1 | DEC <i>eb</i> | 2,mem=7 | Decrement EA byte by 1 |
| FF /1 | DEC <i>ew</i> | 2,mem=7 | Decrement EA word by 1 |
| 48+ <i>rw</i> | DEC <i>rw</i> | 2 | Decrement word register by 1 |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity

FLAGS UNDEFINED

None

OPERATION

1 is subtracted from the operand. Note that the carry flag is not changed by this instruction. If you want the carry flag set, use the SUB instruction with a second operand of 1.

PROTECTED MODE EXCEPTIONS

#GP(0) if the operand is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

DIV—Unsigned Divide

| Opcode | Instruction | Clocks | Description |
|--------|---------------|-----------|----------------------------------|
| F6 /6 | DIV <i>eb</i> | 14,mem=17 | Unsigned divide AX by EA byte |
| F7 /6 | DIV <i>ew</i> | 22,mem=25 | Unsigned divide DX:AX by EA word |

FLAGS MODIFIED

None

FLAGS UNDEFINED

Overflow, sign, zero, auxiliary carry, parity, carry

OPERATION

DIV performs an unsigned divide. The dividend is implicit; only the divisor is given as an operand. If the source operand is a BYTE operand, divide AX by the byte. The quotient is stored in AL, and the remainder is stored in AH. If the source operand is a WORD operand, divide DX:AX by the word. The high-order 16 bits of the dividend are kept in DX. The quotient is stored in AX, and

the remainder is stored in DX. Non-integral quotients are truncated towards 0. The remainder is always less than the dividend.

PROTECTED MODE EXCEPTIONS

Interrupt 0 if the quotient is too big to fit in the designated register (AL or AX), or if the divisor is zero. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 0 if the quotient is too big to fit in the designated register (AL or AX), or if the divisor is zero. Interrupt 13 for a word operand at offset 0FFFFH.

ENTER—Make Stack Frame for Procedure Parameters

| Opcode | Instruction | Clocks | Description |
|------------------------|-----------------------------|----------------|---|
| C8 <i>dw</i> 00 | ENTER <i>dw</i> ,0 | 11 | Make stack frame for procedure parameters |
| C8 <i>dw</i> 01 | ENTER <i>dw</i> ,1 | 15 | Make stack frame for procedure parameters |
| C8 <i>dw</i> <i>db</i> | ENTER <i>dw</i> , <i>db</i> | 12+4 <i>db</i> | Make stack frame for procedure parameters |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

ENTER is used to create the stack frame required by most block-structured high-level languages. The first operand specifies how many bytes of dynamic storage are to be allocated on the stack for the routine being entered. The second operand gives the lexical nesting level of the routine within the high-level-language source code. It determines how many stack frame pointers are copied into the new stack frame from the preceding frame. BP is used as the current stack frame pointer.

If the second operand is 0, ENTER pushes BP, sets BP to SP, and subtracts the first operand from SP.

For example, a procedure with 12 bytes of local variables would have an ENTER 12,0 instruction at its entry point and a LEAVE instruction before every RET. The 12 local

bytes would be addressed as negative offsets from [BP]. See also section 4.2.

The formal definition of the ENTER instruction for all cases is given by the following listing. LEVEL denotes the value of the second operand.

LEVEL:=LEVEL MOD 32

Push BP

Set a temporary value FRAME_PTR := SP

If LEVEL > 0 then

Repeat (LEVEL-1) times:

BP := BP - 2

Push the word pointed to by BP

End repeat

Push FRAME_PTR

End if

BP := FRAME_PTR

SP := SP - first operand.

PROTECTED MODE EXCEPTIONS

#SS(0) if SP were to go outside of the stack limit within any part of the instruction execution.

REAL ADDRESS MODE EXCEPTIONS

None

HLT—Halt

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|-------------|
| F4 | HLT | 2 | Halt |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

Successful execution of HLT causes the iAPX 286 to cease executing instructions and to enter a HALT state. Execution resumes only upon receipt of an enabled interrupt or a reset.

If an interrupt is used to resume program execution after HLT, the saved CS:IP value will point to the instruction that follows HLT.

PROTECTED MODE EXCEPTIONS

HLT is a privileged instruction. #GP(0) if the current privilege level is not 0.

REAL ADDRESS MODE EXCEPTIONS

None

IDIV—Signed Divide

| Opcode | Instruction | Clocks | Description |
|--------|----------------|-----------|---|
| F6 /7 | IDIV <i>eb</i> | 17,mem=20 | Signed divide AX by EA byte (AL=Quo, AH=Rem) |
| F7 /7 | IDIV <i>ew</i> | 25,mem=28 | Signed divide DX:AX by EA word (AX=Quo, DX=Rem) |

FLAGS MODIFIED

None

FLAGS UNDEFINED

Overflow, sign, zero, auxiliary carry, parity, carry

OPERATION

IDIV performs a signed divide. The dividend is implicit; only the divisor is given as an operand. If the source operand is a BYTE operand, divide AX by the byte. The quotient is stored in AL, and the remainder is stored in AH. If the source operand is a WORD operand, divide DX:AX by the word. The high-order 16 bits of the dividend are in DX. The quotient is stored in AX, and the remainder is stored in DX. Non-integral

quotients are truncated towards 0. The remainder has the same sign as the dividend and always has less magnitude than the dividend.

PROTECTED MODE EXCEPTIONS

Interrupt 0 if the quotient is too big to fit in the designated register (AL or AX), or if the divisor is 0. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 0 if the quotient is too big to fit in the designated register (AL or AX), or if the divisor is 0. Interrupt 13 for a word operand at offset 0FFFFH.

IMUL—Signed Multiply

| Opcode | Instruction | Clocks | Description |
|----------|----------------------|-----------|--|
| F6 /5 | IMUL <i>eb</i> | 13,mem=16 | Signed multiply (AX = AL × EA byte) |
| F7 /5 | IMUL <i>ew</i> | 21,mem=24 | Signed multiply (DXAX = AX × EA word) |
| 6B /r db | IMUL <i>rw,db</i> | 21,mem=24 | Signed multiply imm. byte into word reg. |
| 69 /r dw | IMUL <i>rw,ew,dw</i> | 21,mem=24 | Signed multiply (rw = EA word × imm. word) |
| 6B /r db | IMUL <i>rw,ew,db</i> | 21,mem=24 | Signed multiply (rw = EA word × imm. byte) |

FLAGS MODIFIED

Overflow, carry

FLAGS UNDEFINED

Sign, zero, auxiliary carry, parity

OPERATION

IMUL performs signed multiplication. If IMUL has a single byte source operand, then the source is multiplied by AL and the 16-bit signed result is left in AX. Carry and overflow are set to 0 if AH is a sign extension of AL; they are set to 1 otherwise.

If IMUL has a single word source operand, then the source operand is multiplied by AX and the 32-bit signed result is left in DX:AX. DX contains the high-order 16 bits of the product. Carry and overflow are set to 0 if DX is a sign extension of AX; they are set to 1 otherwise.

If IMUL has three operands, then the second operand (an effective address word) is multi-

plied by the third operand (an immediate word), and the 16 bits of the result are placed in the first operand (a word register). Carry and overflow are set to 0 if the result fits in a signed word (between -32768 and +32767, inclusive); they are set to 1 otherwise.

NOTE

The low 16 bits of the product of a 16-bit signed multiply are the same as those of an unsigned multiply. The three operand IMUL instruction can be used for unsigned operands as well.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments;
 #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

IN—Input from Port

| Opcode | Instruction | Clocks | Description |
|--------------|------------------|--------|--|
| E4 <i>db</i> | IN AL, <i>db</i> | 5 | Input byte from immediate port into AL |
| EC | IN AL,DX | 5 | Input byte from port DX into AL |
| E5 <i>db</i> | IN AX, <i>db</i> | 5 | Input word from immediate port into AX |
| ED | IN AX,DX | 5 | Input word from port DX into AX |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

IN transfers a data byte or data word from the port numbered by the second operand into the register (AL or AX) given as the first operand. You can access any port from 0 to 65535 by placing the port number in the DX register then using an IN instruction with DX as the second parameter. These I/O instructions can be shortened by using an 8-bit port

I/O in the instruction. The upper 8 bits of the port address will be zero when an 8-bit port I/O is used.

Intel has reserved I/O port addresses 00F8H through 00FFH; they should not be used.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is bigger (has less privilege) than IOPL, which is the privilege level found in the flags register.

REAL ADDRESS MODE EXCEPTIONS

None

INC—Increment by 1

| Opcode | Instruction | Clocks | Description |
|---------------|---------------|---------|------------------------------|
| FE /0 | INC <i>eb</i> | 2,mem=7 | Increment EA byte by 1 |
| FF /0 | INC <i>ew</i> | 2,mem=7 | Increment EA word by 1 |
| 40+ <i>rw</i> | INC <i>rw</i> | 2 | Increment word register by 1 |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity

FLAGS UNDEFINED

None

OPERATION

1 is added to the operand. Note that the carry flag is not changed by this instruction. If you want the carry flag set, use the ADD instruction with a second operand of 1.

PROTECTED MODE EXCEPTIONS

#GP(0) if the operand is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

INS/INSB/INSW—Input from Port to String

| Opcode | Instruction | Clocks | Description |
|--------|-------------------|--------|--------------------------------------|
| 6C | INS <i>eb</i> ,DX | 5 | Input byte from port DX into ES:[DI] |
| 6D | INS <i>ew</i> ,DX | 5 | Input word from port DX into ES:[DI] |
| 6C | INSB | 5 | Input byte from port DX into ES:[DI] |
| 6D | INSW | 5 | Input word from port DX into ES:[DI] |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

INS transfers data from the input port numbered by the DX register to the memory byte or word at ES:DI. The memory operand must be addressable from the ES register; no segment override is possible.

INS does not allow the specification of the port number as an immediate value. The port must be addressed through the DX register.

After the transfer is made, DI is automatically advanced. If the direction flag is 0 (CLD was executed), DI increments; if the direction flag is 1 (STD was executed), DI decrements. DI increments or decrements by 1 if a byte was moved; by 2 if a word was moved.

INS can be preceded by the REP prefix for block input of CX bytes or words. Refer to the REP instruction for details of this operation.

Intel has reserved I/O port addresses 00F8H through 00FFH; they should not be used.

NOTE

Not all input port devices can handle the rate at which this instruction transfers input data to memory.

PROTECTED MODE EXCEPTIONS

#GP(0) if $CPL > IOPL$. #GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

INT/INTO—Call to Interrupt Procedure

| Opcode | Instruction | Clocks ⁽¹⁾ | Description |
|--------------|---------------|-------------------------|---|
| CC | INT 3 | 23 ⁽²⁾ | Interrupt 3 (trap to debugger) |
| CC | INT 3 | 40 | Interrupt 3, protected mode, same privilege |
| CC | INT 3 | 78 | Interrupt 3, protected mode, more privilege |
| CC | INT 3 | 167 | Interrupt 3, protected mode, via task gate |
| CD <i>db</i> | INT <i>db</i> | 23 ⁽²⁾ | Interrupt numbered by immediate byte |
| CD <i>db</i> | INT <i>db</i> | 40 | Interrupt, protected mode, same privilege |
| CD <i>db</i> | INT <i>db</i> | 78 | Interrupt, protected mode, more privilege |
| CD <i>db</i> | INT <i>db</i> | 167 | Interrupt, protected mode, via task gate |
| CE | INTO | 24,noj=3 ⁽²⁾ | Interrupt 4 if overflow flag is 1 |

⁽¹⁾ = Add one clock for each byte of the next instruction executed.

⁽²⁾ = (real mode)

FLAGS MODIFIED

All if a task switch takes place; Trap Flag reset if no task switch takes place. Interrupt Flag is always reset in Real Mode, and reset in Protected Mode when INT references an interrupt gate.

FLAGS UNDEFINED

None

OPERATION

The INT instruction generates via software a call to an interrupt procedure. The immediate operand, from 0 to 255, gives the index number into the Interrupt Descriptor Table of the interrupt routine to be called. In protected mode, the IDT consists of 8-byte descriptors; the descriptor for the interrupt invoked must indicate an interrupt gate, a trap gate, or a task gate. In real address mode, the IDT is an array of 4-byte long pointers at the fixed location 00000H.

The INTO instruction is identical to the INT instruction except that the interrupt number is implicitly 4, and the interrupt is made only if the overflow flag of the iAPX 286 is on. The clock counts for the four forms of INT

db are valid for INTO, with the number of clocks increased by 1 for the overflow flag test.

The first 32 interrupts are reserved by Intel for systems use. Some of these interrupts are exception handlers for internally-generated faults. Most of these exception handlers should not be invoked with the INT instruction.

Generally, interrupts behave like far CALLS except that the flags register is pushed onto the stack before the return address. Interrupt procedures return via the IRET instruction, which pops the flags from the stack.

In Real Address mode, INT pushes the flags, CS and the return IP onto the stack in that order, then resets the Trap Flag, then jumps to the long pointer indexed by the interrupt number, in the interrupt vector table.

In Protected mode, INT also resets the Trap Flag. In Protected mode, the precise semantics of the INT instruction are given by the following:

INTERRUPT

Interrupt vector must be within IDT table limits else #GP (vector number $\times 8 + 2 + \text{EXT}$)

Descriptor AR byte must indicate interrupt gate, trap gate, or task gate else #GP (vector number $\times 8 + 2 + \text{EXT}$)

If INT instruction then gate descriptor DPL must be \geq CPL else #GP (vector number $\times 8 + 2 + \text{EXT}$)

THE IAPX 286 INSTRUCTION SET

Gate must be PRESENT else #NP (vector number $\times 8 + 2 + \text{EXT}$)

If TRAP GATE or INTERRUPT GATE:

Examine CS selector and descriptor given in the gate descriptor:

Selector must be non-null else #GP (EXT)

Selector must be within its descriptor table limits else #GP (selector + EXT)

Descriptor AR byte must indicate code segment else #GP (selector + EXT)

Segment must be PRESENT else #NP (selector + EXT)

If code segment is non-conforming and $\text{DPL} < \text{CPL}$ then

INTERRUPT TO INNER PRIVILEGE:

Check selector and descriptor for new stack in current Task State Segment:

Selector must be non-null else #GP(EXT)

Selector index must be within its descriptor table limits else #TS (SS selector + EXT)

Selector's RPL must equal DPL of code segment else #TS (SS selector + EXT)

Stack segment DPL must equal DPL of code segment else #TS (SS selector + EXT)

Descriptor must indicate writable data segment else #TS (SS selector + EXT)

Segment must be PRESENT else #SS (SS selector + EXT)

New stack must have room for 10 bytes else #SS(0)

IP must be in CS limit else #GP(0)

Load new SS and SP value from TSS

Load new CS and IP value from gate

Load CS descriptor

Load SS descriptor

Push long pointer to old stack onto new stack

Push return address onto new stack

Set CPL to new code segment DPL

Set RPL of CS to CPL

If INTERRUPT GATE then set the Interrupts Enabled Flag to 0 (disabled)

Set the Trap Flag to 0

Set the Nested Task Flag to 0

If code segment is conforming or code segment $\text{DPL} = \text{CPL}$ then

INTERRUPT TO SAME PRIVILEGE LEVEL:

Current stack limits must allow pushing 6 bytes else #SS(0)

If interrupt was caused by fault with error code then

Stack limits must allow push of two more bytes else #SS(0)

IP must be in CS limit else #GP(0)

Push flags onto stack

Push current CS selector onto stack

Push return offset onto stack

Load CS:IP from gate

Load CS descriptor

Set the RPL field of CS to CPL

Push error code (if any) onto stack

If INTERRUPT GATE then set the Interrupts Enabled Flag to 0 (disabled)

Set the Trap Flag to 0

Set the Nested Task Flag to 0

Else #GP (CS selector + EXT)

If TASK GATE:

Examine selector to TSS, given in Task Gate descriptor:

Must specify global in the local/global bit else #GP (TSS selector)

Index must be within GDT limits else #GP (TSS selector)

AR byte must specify available TSS (bottom bits 00001) else #GP (TSS selector)

Task State Segment must be PRESENT else #NP (TSS selector)

SWITCH_TASKS with nesting to TSS

If interrupt was caused by fault with error code then

Stack limits must allow push of two more bytes else #SS(0)

Push error code onto stack

IP must be in CS limit else #GP(0)

NOTE

EXT is 1 if an external event (i.e., a single step, an external interrupt, an MF exception, or an MP exception) caused the interrupt; 0 if not (i.e., an INT instruction or other exceptions).

PROTECTED MODE EXCEPTIONS

#GP, #NP, #SS, and #TS, as indicated in the list above.

REAL ADDRESS MODE EXCEPTIONS

None; the 80286 will shut down if the SP = 1, 3, or 5 before executing the INT or INTO instruction—due to lack of stack space.

IRET—Interrupt Return

| Opcode | Instruction | Clocks* | Description |
|--------|-------------|----------|---|
| CF | IRET | 17,pm=31 | Interrupt return (far return and pop flags) |
| CF | IRET | 55 | Interrupt return, lesser privilege |
| CF | IRET | 169 | Interrupt return, different task (NT=1) |

*Add one clock for each byte in the next instruction executed.

FLAGS MODIFIED

Entire flags register popped from stack

FLAGS UNDEFINED

None

OPERATION

In real address mode, IRET pops IP, CS, and FLAGS from the stack in that order, and resumes the interrupted routine.

In protected mode, the action of IRET depends on the setting of the Nested Task Flag (NT) bit in the flag register. When popping the new flag image from the stack, note that the IOPL bits in the flag register are changed only when CPL=0.

If NT=0, IRET returns from an interrupt procedure without a task switch. The code returned to must be equally or less privileged than the interrupt routine as indicated by the RPL bits of the CS selector popped from the stack. If the destination code is of less privilege, IRET then also pops SP and SS from the stack.

If NT=1, IRET reverses the operation of a CALL or INT that caused a task switch. The task executing IRET has its updated state saved in its Task State Segment. This means that if the task is re-entered, the code that follows IRET will be executed.

The exact checks and actions performed by IRET in protected mode are given on the following page.

INTERRUPT RETURN:

If Nested Task Flag=1 then

RETURN FROM NESTED TASK:

Examine Back Link Selector in TSS addressed by the current Task Register:

Must specify global in the local/global bit else #TS (new TSS selector)

Index must be within GDT limits else #TS (new TSS selector)

AR byte must specify TSS else #TS (new TSS selector)

New TSS must be busy else #TS (new TSS selector)

Task State Segment must be PRESENT else #NP (new TSS selector)

SWITCH_TASKS without nesting to TSS specified by back link selector

Mark the task just abandoned as NOT BUSY

IP must be in code segment limit else #GP(0)

If Nested Task Flag=0 then

INTERRUPT RETURN ON STACK:

Second word on stack must be within stack limits else #SS(0)

Return CS selector RPL must be \geq CPL else #GP (Return selector)

If return selector RPL = CPL then

INTERRUPT RETURN TO SAME LEVEL:

Top 6 bytes on stack must be within limits else #SS(0)

Return CS selector (at SP+2) must be non-null else #GP(0)

Selector index must be within its descriptor table limits else #GP (Return selector)

AR byte must indicate code segment else #GP (Return selector)

If non-conforming then code segment DPL must = CPL else #GP (Return selector)

If conforming then code segment DPL must be \leq CPL else #GP (Return selector)

Segment must be PRESENT else #NP (Return selector)

IP must be in code segment limit else #GP(0)

Load CS:IP from stack

Load CS-cache with new code segment descriptor

Load flags with third word on stack

Increment SP by 6

Else

INTERRUPT RETURN TO OUTER PRIVILEGE LEVEL:

Top 10 bytes on stack must be within limits else #SS(0)

Examine return CS selector (at SP+2) and associated descriptor:

Selector must be non-null else #GP(0)

Selector index must be within its descriptor table limits else #GP (Return selector)

AR byte must indicate code segment else #GP (Return selector)

If non-conforming then code segment DPL must = CS selector RPL else #GP (Return selector)

If conforming then code segment DPL must be $>$ CPL else #GP (Return selector)

Segment must be PRESENT else #NP (Return selector)

Examine return SS selector (at SP+8) and associated descriptor:

Selector must be non-null else #GP(0)

Selector index must be within its descriptor table limits else #GP (SS selector)

Selector RPL must equal the RPL of the return CS selector else #GP (SS selector)

AR byte must indicate a writable data segment else #GP (SS selector)

Stack segment DPL must equal the RPL of the return CS selector else #GP (SS selector)

SS must be PRESENT else #NP (SS selector)

IP must be in code segment limit else #GP(0)

Load CS:IP from stack

Load flags with values at (SP+4)

Load SS:SP from stack

Set CPL to the RPL of the return CS selector

Load the CS-cache with the CS descriptor

Load the SS-cache with the SS descriptor

For each of ES and DS:

If the current register setting is not valid for the outer level, then zero the register and clear the valid flag

To be valid, the register setting must satisfy the following properties:

Selector index must be within descriptor table limits

THE IAPX 286 INSTRUCTION SET

AR byte must indicate data or readable code segment
If segment is data or non-conforming code, then:
DPL must be \geq CPL, or
DPL must be \geq RPL.

PROTECTED MODE EXCEPTIONS

#GP, #NP, or #SS, as indicated in the above listing.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 if the stack is popped when it has offset 0FFFFH.

Jcond—Jump Short If Condition Met

| Opcode | Instruction | Clocks* | Description |
|--------------|----------------|---------|---|
| 77 <i>cb</i> | JA <i>cb</i> | 7,noj=3 | Jump short if above (CF=0 and ZF=0) |
| 73 <i>cb</i> | JAE <i>cb</i> | 7,noj=3 | Jump short if above or equal (CF=0) |
| 72 <i>cb</i> | JB <i>cb</i> | 7,noj=3 | Jump short if below (CF=1) |
| 76 <i>cb</i> | JBE <i>cb</i> | 7,noj=3 | Jump short if below or equal (CF=1 or ZF=1) |
| 72 <i>cb</i> | JC <i>cb</i> | 7,noj=3 | Jump short if carry (CF=1) |
| E3 <i>cb</i> | JCXZ <i>cb</i> | 8,noj=4 | Jump short if CX register is zero |
| 74 <i>cb</i> | JE <i>cb</i> | 7,noj=3 | Jump short if equal (ZF=1) |
| 7F <i>cb</i> | JG <i>cb</i> | 7,noj=3 | Jump short if greater (ZF=0 and SF=OF) |
| 7D <i>cb</i> | JGE <i>cb</i> | 7,noj=3 | Jump short if greater or equal (SF=OF) |
| 7C <i>cb</i> | JL <i>cb</i> | 7,noj=3 | Jump short if less (SF/=OF) |
| 7E <i>cb</i> | JLE <i>cb</i> | 7,noj=3 | Jump short if less or equal (ZF=1 or SF/=OF) |
| 76 <i>cb</i> | JNA <i>cb</i> | 7,noj=3 | Jump short if not above (CF=1 or ZF=1) |
| 72 <i>cb</i> | JNAE <i>cb</i> | 7,noj=3 | Jump short if not above/equal (CF=1) |
| 73 <i>cb</i> | JNB <i>cb</i> | 7,noj=3 | Jump short if not below (CF=0) |
| 77 <i>cb</i> | JNBE <i>cb</i> | 7,noj=3 | Jump short if not below/equal (CF=0 and ZF=0) |
| 73 <i>cb</i> | JNC <i>cb</i> | 7,noj=3 | Jump short if not carry (CF=0) |
| 75 <i>cb</i> | JNE <i>cb</i> | 7,noj=3 | Jump short if not equal (ZF=0) |
| 7E <i>cb</i> | JNG <i>cb</i> | 7,noj=3 | Jump short if not greater (ZF=1 or SF/=OF) |
| 7C <i>cb</i> | JNGE <i>cb</i> | 7,noj=3 | Jump short if not greater/equal (SF/=OF) |
| 7D <i>cb</i> | JNL <i>cb</i> | 7,noj=3 | Jump short if not less (SF=OF) |
| 7F <i>cb</i> | JNLE <i>cb</i> | 7,noj=3 | Jump short if not less/equal (ZF=0 and SF=OF) |
| 71 <i>cb</i> | JNO <i>cb</i> | 7,noj=3 | Jump short if not overflow (OF=0) |
| 7B <i>cb</i> | JNP <i>cb</i> | 7,noj=3 | Jump short if not parity (PF=0) |
| 79 <i>cb</i> | JNS <i>cb</i> | 7,noj=3 | Jump short if not sign (SF=0) |
| 75 <i>cb</i> | JNZ <i>cb</i> | 7,noj=3 | Jump short if not zero (ZF=0) |
| 70 <i>cb</i> | JO <i>cb</i> | 7,noj=3 | Jump short if overflow (OF=1) |
| 7A <i>cb</i> | JP <i>cb</i> | 7,noj=3 | Jump short if parity (PF=1) |
| 7A <i>cb</i> | JPE <i>cb</i> | 7,noj=3 | Jump short if parity even (PF=1) |
| 7B <i>cb</i> | JPO <i>cb</i> | 7,noj=3 | Jump short if parity odd (PF=0) |
| 78 <i>cb</i> | JS <i>cb</i> | 7,noj=3 | Jump short if sign (SF=1) |
| 74 <i>cb</i> | JZ <i>cb</i> | 7,noj=3 | Jump short if zero (ZF=1) |

*When a jump is taken, add one clock for every byte of the next instruction executed.

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

Conditional jumps (except for JCXZ, explained below) test the flags, which presumably have been set in some meaningful way by a previous instruction. The conditions for each mnemonic are given in parentheses after each description above. The

terms “less” and “greater” are used for comparing signed integers; “above” and “below” are used for unsigned integers.

If the given condition is true, then a short jump is made to the label provided as the operand. Instruction encoding is most efficient when the target for the conditional jump is in the current code segment and within -128 to $+127$ bytes of the first byte of the next instruction. Alternatively, the opposite sense (e.g., JNZ has opposite sense to that of JZ) of the conditional jump can skip around an unconditional jump to the destination.

This range is necessary for the assembler to construct a one-byte signed displacement from the end of the current instruction. If the label is out-of-range, or if the label is a FAR label, then you must perform a jump with the opposite condition around an unconditional jump to the non-short label.

Because there are, in many instances, several ways to interpret a particular state of the flags, ASM286 provides more than one mnemonic for most of the conditional jump opcodes. For example, consider that a programmer who has just compared a character to another in AL might wish to jump if the two were equal (JE), while another programmer who had just ANDed AX with a bit field mask would prefer to consider only whether the result was zero or not (he would use JZ, a synonym for JE).

JCXZ differs from the other conditional jumps in that it actually tests the contents of the CX register for zero, rather than interrogating the flags. This instruction is useful following a conditionally repeated string operation (REPE SCASB, for example) or a conditional loop instruction (such as LOOPNE TARGETLABEL). These instructions implicitly use a limiting count in the CX register. Looping (repeating) ends when either the CX register goes to zero or the condition specified in the instruction (flags indicating equals in both of the above cases) occurs. JCXZ is useful when the terminations must be handled differently.

PROTECTED MODE EXCEPTIONS

#GP(0) if the offset jumped to is beyond the limits of the code segment.

REAL ADDRESS MODE EXCEPTIONS

None

JMP—Jump

| Opcode | Instruction | Clocks* | Description |
|--------------|---------------|----------|--|
| EB <i>cb</i> | JMP <i>cb</i> | 7 | Jump short |
| EA <i>cd</i> | JMP <i>cd</i> | 180 | Jump to task gate |
| E9 <i>cw</i> | JMP <i>cw</i> | 7 | Jump near |
| EA <i>cd</i> | JMP <i>cd</i> | 11,pm=23 | Jump far (4-byte immediate address) |
| EA <i>cd</i> | JMP <i>cd</i> | 38 | Jump to call gate, same privilege |
| EA <i>cd</i> | JMP <i>cd</i> | 175 | Jump via Task State Segment |
| FF /4 | JMP <i>ew</i> | 7,mem=11 | Jump near to EA word (absolute offset) |
| FF /5 | JMP <i>ed</i> | 15,pm=26 | Jump far (4-byte effective address in memory doubleword) |
| FF /5 | JMP <i>ed</i> | 41 | Jump to call gate, same privilege |
| FF /5 | JMP <i>ed</i> | 178 | Jump via Task State Segment |
| FF /5 | JMP <i>ed</i> | 183 | Jump to task gate |

*Add one clock for every byte of the next instruction executed.

FLAGS MODIFIED

All if a task switch takes place; none if no task switch occurs.

FLAGS UNDEFINED

None

OPERATION

The JMP instruction transfers program control to a different instruction stream without recording any return information.

For inter-segment jumps, the destination can be a code segment, a call gate, a task gate, or a Task State Segment. The latter two destinations cause a complete task switch to take place.

Control transfers within a segment use the JMP *cw* or JMP *cb* forms. The operand is a relative offset added modulo 65536 to the offset of the instruction that follows the JMP. The result is the new value of IP; the value of CS is unchanged. The byte operand is sign-extended before it is added; it can therefore be used to address labels within 128 bytes in either direction from the next instruction.

Indirect jumps within a segment use the JMP *ew* form. The contents of the register or memory operand is an absolute offset, which becomes the new value of IP. Again, CS is unchanged.

Inter-segment jumps in real address mode simply set IP to the offset part of the long pointer and set CS to the selector part of the pointer.

In protected mode, inter-segment jumps cause the iAPX 286 to consult the descriptor addressed by the selector part of the long pointer. The AR byte of the descriptor determines the type of the destination. (See table B-3 for possible values of the AR byte.) Following are the possible destinations:

1. Code segment—The addressability and visibility of the destination are verified, and CS and IP are loaded with the destination pointer values.
2. Call gate—The offset part of the destination pointer is ignored. After checking for validity, the processor jumps to the location stored in the call gate descriptor.

3. Task gate—The current task's state is saved in its Task State Segment (TSS), and the TSS named in the task gate is used to load a new context. The outgoing task is marked not busy, the new TSS is marked busy, and execution resumes at the point at which the new task was last suspended.
4. TSS—The current task is suspended and the new task is initiated as in 3 above except that there is no intervening gate.

Following is the list of checks and actions taken for long jumps in protected mode:

JUMP FAR:

If indirect then check access of EA doubleword #GP(0) or #SS(0) if limit violation
 Destination selector is not null else #GP(0)
 Destination selector index is within its descriptor table limits else #GP (selector)
 Examine AR byte of destination selector for legal values:

JUMP CONFORMING CODE SEGMENT:

Descriptor DPL must be \leq CPL else #GP (selector)
 Segment must be PRESENT else #NP (selector)
 IP must be in code segment limit else #GP(0)
 Load CS:IP from destination pointer
 Load CS-cache with new segment descriptor

JUMP NONCONFORMING CODE SEGMENT:

RPL of destination selector must be \leq CPL else #GP (selector)
 Descriptor DPL must = CPL else #GP (selector)
 Segment must be PRESENT else #NP (selector)
 IP must be in code segment limit else #GP(0)
 Load CS:IP from destination pointer
 Load CS-cache with new segment descriptor
 Set RPL field of CS register to CPL

JUMP TO CALL GATE:

Descriptor DPL must be \geq CPL else #GP (gate selector)
 Descriptor DPL must be \geq gate selector RPL else #GP (gate selector)
 Gate must be PRESENT else #NP (gate selector)
 Examine selector to code segment given in call gate descriptor:
 Selector must not be null else #GP(0)
 Selector must be within its descriptor table limits else #GP (CS selector)
 Descriptor AR byte must indicate code segment else #GP (CS selector)
 If non-conforming, code segment descriptor DPL must = CPL else #GP (CS selector)
 If conforming, then code segment descriptor DPL must be \leq CPL else #GP (CS selector)
 Code Segment must be PRESENT else #NP (CS selector)
 IP must be in code segment limit else #GP(0)
 Load CS:IP from call gate
 Load CS-cache with new code segment
 Set RPL of CS to CPL

JUMP TASK GATE:

Gate descriptor DPL must be \geq CPL else #GP (gate selector)
 Gate descriptor DPL must be \geq gate selector RPL else #GP (gate selector)
 Task Gate must be PRESENT else #NP (gate selector)
 Examine selector to TSS, given in Task Gate descriptor:
 Must specify global in the local/global bit else #GP (TSS selector)
 Index must be within GDT limits else #GP (TSS selector)
 Descriptor AR byte must specify available TSS (bottom bits 00001) else #GP (TSS selector)
 Task State Segment must be PRESENT else #NP (TSS selector)

SWITCH_TASKS without nesting to TSS
IP must be in code segment limit else #GP(0)

JUMP TASK STATE SEGMENT:

TSS DPL must be \geq CPL else #GP (TSS selector)
TSS DPL must be \geq TSS selector RPL else #GP (TSS selector)
Descriptor AR byte must specify available TSS (bottom bits 00001) else #GP (TSS selector)
Task State Segment must be PRESENT else #NP (TSS selector)
SWITCH_TASKS with nesting to TS.
IP must be in code segment limit else #GP(0)

Else GP (selector)

PROTECTED MODE EXCEPTIONS

For NEAR jumps, #GP(0) if the destination offset is beyond the limits of the current code segment. For FAR jumps, #GP, #NP, #SS, and #TS, as indicated above. #UD if indirect inter-segment jump operand is a register.

REAL ADDRESS MODE EXCEPTIONS

#UD if indirect inter-segment jump operand is a register.

LAHF—Load Flags into AH Register

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--|
| 9F | LAHF | 2 | Load: AH = flags SF ZF xx AF xx PF xx CF |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The low byte of the flags word is transferred to AH. The bits, from MSB to LSB, are as

follows: sign, zero, indeterminate, auxiliary carry, indeterminate, parity, indeterminate, and carry. See figure 3-5.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

LAR—Load Access Rights Byte

| Opcode | Instruction | Clocks | Description |
|----------|------------------|-----------|---|
| 0F 02 /r | LAR <i>rw,ew</i> | 14,mem=16 | Load: high(<i>rw</i>)= Access Rights byte,selector <i>ew</i> |

FLAGS MODIFIED

Zero

FLAGS UNDEFINED

None

OPERATION

LAR expects the second operand (memory or register word) to contain a selector. If the associated descriptor is visible at the current privilege level and at the selector RPL, then the access rights byte of the descriptor is loaded into the high byte of the first (register) operand, and the low byte is set to zero. The zero flag is set if the loading was performed (i.e., the selector index is within the

table limit, descriptor $DPL \geq CPL$, and descriptor $DPL \geq \text{selector RPL}$); the zero flag is cleared otherwise.

Selector operands cannot cause protection exceptions.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTION

INTERRUPT 6; LAR is unrecognized in Real Address mode.

LDS/LES—Load Doubleword Pointer

| Opcode | Instruction | Clocks | Description |
|--------|------------------|---------|--|
| C5 /r | LDS <i>rw,ed</i> | 7,pm=21 | Load EA doubleword into DS and word register |
| C4 /r | LES <i>rw,ed</i> | 7,pm=21 | Load EA doubleword into ES and word register |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The four-byte pointer at the memory location indicated by the second operand is loaded into a segment register and a word register. The first word of the pointer (the offset) is loaded into the register indicated by the first operand. The last word of the pointer (the selector) is loaded into the segment register (DS or ES) given by the instruction opcode.

When the segment register is loaded, its associated cache is also loaded. The data for the cache is obtained from the descriptor table entry for the selector given.

A null selector (values 0000-0003) can be loaded into DS or ES without a protection exception. Any memory reference using such a segment register value will cause a #GP(0) exception but will not result in a memory reference. The saved segment register value will be null.

Following is a list of checks and actions taken when loading the DS or ES registers:

If selector is non-null then:

Selector index must be within its descriptor table limits else #GP (selector)
Examine descriptor AR byte:

Data segment or readable non-conforming code segment
Descriptor $DPL \geq CPL$ else #GP (selector)
Descriptor $DPL \geq \text{selector RPL}$ else #GP (selector)

Readable conforming code segment
No DPL, RPL, or CPL checks

Else #GP (selector)

Segment must be present else #NP (selector)
Load registers from operand
Load segment register descriptor cache

If selector is null then:

Load registers from operand
Mark segment register cache as invalid

THE IAPX 286 INSTRUCTION SET

PROTECTED MODE EXCEPTIONS

#GP or #NP, as indicated in the list above.
#GP(0) or #SS(0) if operand lies outside segment limit. #UD if the source operand is a register.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for operand at offset 0FFFFH or 0FFFDH. #UD if the source operand is a register.

LEA—Load Effective Address Offset

| Opcode | Instruction | Clocks | Description |
|--------|-----------------|--------|--|
| 8D /r | LEA <i>rw,m</i> | 3 | Calculate EA offset given by <i>m</i> , place in <i>rw</i> |

FLAGS MODIFIED

None

second operand is placed in the first (register) operand.

FLAGS UNDEFINED

None

PROTECTED MODE EXCEPTIONS

#UD if second operand is a register.

OPERATION

The effective address (offset part) of the

REAL ADDRESS MODE EXCEPTIONS

#UD if second operand is a register.

LEAVE—High Level Procedure Exit

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---------------------------|
| C9 | LEAVE | 5 | Set SP to BP, then POP BP |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

LEAVE is the complementary operation to ENTER; it reverses the effects of that instruction. By copying BP to SP, LEAVE releases the stack space used by a procedure for its dynamics and display. The old frame pointer is now popped into BP, restoring the

caller's frame, and a subsequent RET *nn* instruction will follow the back-link and remove any arguments pushed on the stack for the exiting procedure.

PROTECTED MODE EXCEPTIONS

#SS(0) if BP does not point to a location within the current stack segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

LGDT/LIDT—Load Global/Interrupt Descriptor Table Register

| Opcode | Instruction | Clocks | Description |
|----------|---------------|--------|---|
| 0F 01 /2 | LGDT <i>m</i> | 11 | Load <i>m</i> into Global Descriptor Table reg |
| 0F 01 /3 | LIDT <i>m</i> | 12 | Load <i>m</i> into Interrupt Descriptor Table reg |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The Global or the Interrupt Descriptor Table Register is loaded from the six bytes of memory pointed to by the effective address operand (see figure 10.3). The LIMIT field of the descriptor table register loads from the first word; the next three bytes go to the BASE field of the register; the last byte is ignored.

LGDT and LIDT appear in operating systems software; they are not used in application programs. These are the only instructions that

directly load a physical memory address in iAPX 286 protected mode.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is not 0.

#UD if source operand is a register.

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

These instructions are valid in Real Address mode to allow the power-up initialization for Protected mode.

Interrupt 13 for a word operand at offset 0FFFFH. #UD if source operand is a register.

LLDT—Load Local Descriptor Table Register

| Opcode | Instruction | Clocks | Description |
|----------|----------------|-----------|--|
| 0F 00 /2 | LLDT <i>ew</i> | 17,mem=19 | Load selector <i>ew</i> into Local Descriptor Table register |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The word operand (memory or register) to LLDT should contain a selector pointing to the Global Descriptor Table. The GDT entry should be a Local Descriptor Table. If so, then the Local Descriptor Table Register is loaded from the entry. The descriptor cache entries for DS, ES, SS, and CS are not affected. The LDT field in the TSS is not changed.

The selector operand is allowed to be zero. In that case, the Local Descriptor Table Register is marked invalid. All descriptor refer-

ences (except by LAR, VERR, VERW or LSL instructions) will cause a #GP fault.

LLDT appears in operating systems software; it does not appear in applications programs.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is not 0.
 #GP (selector) if the selector operand does not point into the Global Descriptor Table, or if the entry in the GDT is not a Local Descriptor Table.
 #NP (selector) if LDT descriptor is not present.
 #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments;
 #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 6; LLDT is not recognized in Real Address Mode.

LMSW—Load Machine Status Word

| Opcode | Instruction | Clocks | Description |
|----------|----------------|---------|---------------------------------------|
| 0F 01 /6 | LMSW <i>ew</i> | 3,mem=6 | Load EA word into Machine Status Word |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The Machine Status Word is loaded from the source operand. This instruction may be used to switch to protected mode. If so, then it *must* be followed by an intra-segment jump to flush the instruction queue. LMSW will not switch back to Real Address Mode.

LMSW appears only in operating systems software. It does not appear in applications programs.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is not 0.
 #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments;
 #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

LOCK—Assert BUS LOCK Signal

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--|
| F0 | LOCK | 0 | Assert BUSLOCK signal for the next instruction |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

LOCK is a prefix that will cause the BUS LOCK signal of the iAPX 286 to be asserted for the duration of the instruction that it prefixes. In a multiprocessor environment, this signal should be used to ensure that the iAPX 286 has exclusive use of any shared memory while BUS LOCK is asserted. The read-modify-write sequence typically used to implement TEST-AND-SET in the iAPX 286 is the XCHG instruction.

The 80286 LOCK prefix activates the lock signal for the following instructions: MOVS, INS, and OUTS. XCHG always asserts BUS LOCK regardless of the presence or absence of the LOCK prefix.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is bigger (less privileged) than the I/O privilege level.

Other exceptions may be generated by the subsequent (locked) instruction.

REAL ADDRESS MODE EXCEPTIONS

None. Exceptions may still be generated by the subsequent (locked) instruction.

LODS/LODSB/LODSW—Load String Operand

| Opcode | Instruction | Clocks | Description |
|--------|----------------|--------|---------------------------|
| AC | LODS <i>mb</i> | 5 | Load byte [SI] into AL |
| AD | LODS <i>mw</i> | 5 | Load word [SI] into AX |
| AC | LODSB | 5 | Load byte DS:[SI] into AL |
| AD | LODSW | 5 | Load word DS:[SI] into AX |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

LODS loads the AL or AX register with the memory byte or word at SI. After the transfer is made, SI is automatically advanced. If the direction flag is 0 (CLD was executed), SI increments; if the direction flag is 1 (STD was executed), SI decrements. SI increments

or decrements by 1 if a byte was moved; by 2 if a word was moved.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

LOOP/LOOPcond—Loop Control with CX Counter

| Opcode | Instruction | Clocks | Description |
|--------------|------------------|---------|---|
| E2 <i>cb</i> | LOOP <i>cb</i> | 8,noj=4 | DEC CX; jump short if CX≠0 |
| E1 <i>cb</i> | LOOPE <i>cb</i> | 8,noj=4 | DEC CX; jump short if CX≠0 and equal (ZF=1) |
| E0 <i>cb</i> | LOOPNE <i>cb</i> | 8,noj=4 | DEC CX; jump short if CX≠0 and not equal (ZF=0) |
| E0 <i>cb</i> | LOOPNZ <i>cb</i> | 8,noj=4 | DEC CX; jump short if CX≠0 and ZF=0 |
| E1 <i>cb</i> | LOOPZ <i>cb</i> | 8,noj=4 | DEC CX; jump short if CX≠0 and zero (ZF=1) |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

LOOP first decrements the CX register without changing any of the flags. Then, conditions are checked as given in the description above for the form of LOOP being used. If the conditions are met, then an intra-segment jump is made. The destination to LOOP is in the range from 126 (decimal) bytes before the instruction to 127 bytes beyond the instruction.

The LOOP instructions are intended to provide iteration control and to combine loop index management with conditional branching. To use the LOOP instruction you load an unsigned iteration count into CX, then code the LOOP at the end of a series of instructions to be iterated. The destination of LOOP is a label that points to the beginning of the iteration.

PROTECTED MODE EXCEPTIONS

#GP(0) if the offset jumped to is beyond the limits of the current code segment.

REAL ADDRESS MODE EXCEPTIONS

None

LSL—Load Segment Limit

| Opcode | Instruction | Clocks | Description |
|----------|------------------|-----------|---|
| 0F 03 /r | LSL <i>rw,ew</i> | 14,mem=16 | Load: <i>rw</i> = Segment Limit, selector <i>ew</i> |

FLAGS MODIFIED

Zero

FLAGS UNDEFINED

None

OPERATION

If the descriptor denoted by the selector in the second (memory or register) operand is visible at the CPL, a word that consists of the limit field of the descriptor is loaded into the left operand, which must be a register. The value is the limit field for that segment. The zero flag is set if the loading was performed (that is, if the selector is non-null, the selector index is within the descriptor table limits, the descriptor is a non-conforming segment descriptor with $DPL \geq CPL$, and the descriptor $DPL \geq$ selector RPL); the zero flag is cleared otherwise.

The LSL instruction returns only the limit field of segments, task state segments, and local descriptor tables. The interpretation of the limit value depends on the type of segment.

The selector operand's value cannot result in a protection exception.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 6; LSL is not recognized in Real Address mode.

LTR—Load Task Register

| Opcode | Instruction | Clocks | Description |
|----------|---------------|-----------|---------------------------------|
| 0F 00 /3 | LTR <i>ew</i> | 17,mem=19 | Load EA word into Task Register |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The Task Register is loaded from the source register or memory location given by the operand. The loaded TSS is marked busy. A task switch operation does not occur.

LTR appears only in operating systems software. It is not used in applications programs.

PROTECTED MODE EXCEPTIONS

#GP for an illegal memory operand effective address in the CS, DS, or ES segments; #SS for an illegal address in the SS segment.

#GP(0) if the current privilege level is not 0.
 #GP (selector) if the object named by the source selector is not a TSS or is already busy.
 #NP (selector) if the TSS is marked not present.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 6; LTR is not recognized in Real Address mode.

MOV—Move Data

| Opcode | Instruction | Clocks | Description |
|--------|-------------------------------|---------|--|
| 88 | <i>/r</i> MOV <i>eb,rb</i> | 2,mem=3 | Move byte register into EA byte |
| 89 | <i>/r</i> MOV <i>ew,rw</i> | 2,mem=3 | Move word register into EA word |
| 8A | <i>/r</i> MOV <i>rb,eb</i> | 2,mem=5 | Move EA byte into byte register |
| 8B | <i>/r</i> MOV <i>rw,ew</i> | 2,mem=5 | Move EA word into word register |
| 8C | <i>/0</i> MOV <i>ew,ES</i> | 2,mem=3 | Move ES into EA word |
| 8C | <i>/1</i> MOV <i>ew,CS</i> | 2,mem=3 | Move CS into EA word |
| 8C | <i>/2</i> MOV <i>ew,SS</i> | 2,mem=3 | Move SS into EA word |
| 8C | <i>/3</i> MOV <i>ew,DS</i> | 2,mem=3 | Move DS into EA word |
| 8E | <i>/0</i> MOV <i>ES,mw</i> | 5,pm=19 | Move memory word into ES |
| 8E | <i>/0</i> MOV <i>ES,rw</i> | 2,pm=17 | Move word register into ES |
| 8E | <i>/2</i> MOV <i>SS,mw</i> | 5,pm=19 | Move memory word into SS |
| 8E | <i>/2</i> MOV <i>SS,rw</i> | 2,pm=17 | Move word register into SS |
| 8E | <i>/3</i> MOV <i>DS,mw</i> | 5,pm=19 | Move memory word into DS |
| 8E | <i>/3</i> MOV <i>DS,rw</i> | 2,pm=17 | Move word register into DS |
| A0 | <i>dw</i> MOV <i>AL,xb</i> | 5 | Move byte variable (offset <i>dw</i>) into AL |
| A1 | <i>dw</i> MOV <i>AX,xw</i> | 5 | Move word variable (offset <i>dw</i>) into AX |
| A2 | <i>dw</i> MOV <i>xb,AL</i> | 3 | Move AL into byte variable (offset <i>dw</i>) |
| A3 | <i>dw</i> MOV <i>xw,AX</i> | 3 | Move AX into word register (offset <i>dw</i>) |
| B0+ | <i>rb db</i> MOV <i>rb,db</i> | 2 | Move immediate byte into byte register |
| B8+ | <i>rw dw</i> MOV <i>rw,dw</i> | 2 | Move immediate word into word register |
| C6 | <i>/0 db</i> MOV <i>eb,db</i> | 2,mem=3 | Move immediate byte into EA byte |
| C7 | <i>/0 dw</i> MOV <i>ew,dw</i> | 2,mem=3 | Move immediate word into EA word |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The second operand is copied to the first operand.

If the destination operand is a segment register (DS, ES, or SS), then the associated segment register cache is also loaded. The data for the cache is obtained from the descriptor table entry for the selector given.

If SS is loaded:

- If selector is null then #GP(0)
- Selector index must be within its descriptor table limits else #GP (selector)
- Selector's RPL must equal CPL else #GP (selector)
- AR byte must indicate a writable data segment else #GP (selector)
- DPL in the AR byte must equal CPL else #GP (selector)
- Segment must be marked PRESENT else #SS (selector)
- Load SS with selector

A null selector (values 0000-0003) can be loaded into DS and ES registers without causing a protection exception. Any use of a segment register with a null selector to address memory will cause #GP(0) exception. No memory reference will occur.

Any move into SS will inhibit all interrupts until after the execution of the next instruction.

Following is a listing of the protected-mode checks and actions taken in the loading of a segment register:

Load SS cache with descriptor

If ES or DS is loaded with non-null selector

Selector index must be within its descriptor table limits else #GP (selector)

AR byte must indicate data or readable code segment else #GP (selector)

If data or non-conforming code, then both the RPL and the

CPL must be less than or equal to DPL in AR byte else #GP (selector)

Segment must be marked PRESENT else #NP (selector)

Load segment register with selector

Load segment register cache with descriptor

If ES or DS is loaded with a null selector:

Load segment register with selector

Clear descriptor valid bit

PROTECTED MODE EXCEPTIONS

If a segment register is being loaded, #GP, #SS, and #NP, as described in the listing above.

Otherwise, #GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal

memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

MOVS/MOVS_B/MOVSW—Move Data from String to String

| Opcode | Instruction | Clocks | Description |
|--------|-------------------|--------|------------------------------|
| A4 | MOVS <i>mb,mb</i> | 5 | Move byte [SI] to ES:[DI] |
| A5 | MOVS <i>mw,mw</i> | 5 | Move word [SI] to ES:[DI] |
| A4 | MOVSB | 5 | Move byte DS:[SI] to ES:[DI] |
| A5 | MOVSW | 5 | Move word DS:[SI] to ES:[DI] |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

MOVS copies the byte or word at [SI] to the byte or word at ES:[DI]. The destination operand must be addressable from the ES register; no segment override is possible. A segment override may be used for the source operand.

After the data movement is made, both SI and DI are automatically advanced. If the direction flag is 0 (CLD was executed), the registers increment; if the direction flag is 1 (STD was executed), the registers decrement. The

registers increment or decrement by 1 if a byte was moved; by 2 if a word was moved.

MOVS can be preceded by the REP prefix for block movement of CX bytes or words. Refer to the REP instruction for details of this operation.

PROTECTED MODE EXCEPTIONS

#GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

MUL—Unsigned Multiplication of AL or AX

| Opcode | Instruction | Clocks | Description |
|--------|---------------|-----------|---|
| F6 /4 | MUL <i>eb</i> | 13,mem=16 | Unsigned multiply (AX = AL × EA byte) |
| F7 /4 | MUL <i>ew</i> | 21,mem=24 | Unsigned multiply (DXAX = AX × EA word) |

FLAGS MODIFIED

Overflow, carry

FLAGS UNDEFINED

Sign, zero, auxiliary carry, parity

OPERATION

If MUL has a byte operand, then the byte is multiplied by AL, and the result is left in AX. Carry and overflow are set to 0 if AH is 0; they are set to 1 otherwise.

If MUL has a word operand, then the word is multiplied by AX, and the result is left in

DX:AX. DX contains the high order 16 bits of the product. Carry and overflow are set to 0 if DX is 0; they are set to 1 otherwise.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments;
#SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

NEG—Two's Complement Negation

| Opcode | Instruction | Clocks | Description |
|--------|---------------|---------|---------------------------------|
| F6 /3 | NEG <i>eb</i> | 2,mem=7 | Two's complement negate EA byte |
| F7 /3 | NEG <i>ew</i> | 2,mem=7 | Two's complement negate EA word |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

None

OPERATION

The two's complement of the register or memory operand replaces the old operand value. Likewise, the operand is subtracted from zero, and the result is placed in the operand.

The carry flag is set to 1 except when the input operand is zero, in which case the carry flag is cleared to 0.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

NOP—No OPERATION

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--------------|
| 90 | NOP | 3 | No OPERATION |

FLAGS MODIFIED

None

filler instruction that takes up space but affects none of the machine context except IP.

FLAGS UNDEFINED

None

PROTECTED MODE EXCEPTIONS

None

OPERATION

Performs no operation. NOP is a one-byte

REAL ADDRESS MODE EXCEPTIONS

None

NOT—One's Complement Negation

| Opcode | Instruction | Clocks | Description |
|--------|---------------|---------|-----------------------------|
| F6 /2 | NOT <i>eb</i> | 2,mem=7 | Reverse each bit of EA byte |
| F7 /2 | NOT <i>ew</i> | 2,mem=7 | Reverse each bit of EA word |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The operand is inverted; that is, every 1 becomes a 0 and vice versa.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

OR—Logical Inclusive OR

| Opcode | Instruction | Clocks | Description |
|-----------------|-----------------|---------|--|
| 08 /r | OR <i>eb,rb</i> | 2,mem=7 | Logical-OR byte register into EA byte |
| 09 /r | OR <i>ew,rw</i> | 2,mem=7 | Logical-OR word register into EA word |
| 0A /r | OR <i>rb,eb</i> | 2,mem=7 | Logical-OR EA byte into byte register |
| 0B /r | OR <i>rw,ew</i> | 2,mem=7 | Logical-OR EA word into word register |
| 0C <i>db</i> | OR <i>AL,db</i> | 3 | Logical-OR immediate byte into AL |
| 0D <i>dw</i> | OR <i>AX,dw</i> | 3 | Logical-OR immediate word into AX |
| 80 /1 <i>db</i> | OR <i>eb,db</i> | 3,mem=7 | Logical-OR immediate byte into EA byte |
| 81 /1 <i>dw</i> | OR <i>ew,dw</i> | 3,mem=7 | Logical-OR immediate word into EA word |

FLAGS MODIFIED

Overflow=0, sign, zero, parity, carry=0

FLAGS UNDEFINED

Auxiliary carry

OPERATION

This instruction computes the inclusive OR of the two operands. Each bit of the result is 0 if both corresponding bits of the operands are 0; each bit is 1 otherwise. The result is placed in the first operand.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

OUT—Output to Port

| Opcode | Instruction | Clocks | Description |
|--------------|-------------------|--------|---|
| E6 <i>db</i> | OUT <i>db</i> ,AL | 3 | Output byte AL to immediate port number <i>db</i> |
| E7 <i>db</i> | OUT <i>db</i> ,AX | 3 | Output word AX to immediate port number <i>db</i> |
| EE | OUT DX,AL | 3 | Output byte AL to port number DX |
| EF | OUT DX,AX | 3 | Output word AX to port number DX |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

OUT transfers a data byte or data word from the register (AL or AX) given as the second operand to the output port numbered by the first operand. You can output to any port from 0-65535 by placing the port number in the DX register then using an OUT instruction with DX as the first operand. If the

instruction contains an 8-bit port ID, that value is zero-extended to 16 bits.

Intel reserves I/O port addresses 00F8H through 00FFH; these addresses should not be used.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is bigger (has less privilege) than IOPL, which is the privilege level found in the flags register.

REAL ADDRESS MODE EXCEPTIONS

None

OUTS/OUTSB/OUTSW—Output String to Port

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---------------------------------------|
| 6E | OUTS DX,eb | 5 | Output byte [SI] to port number DX |
| 6F | OUTS DX,ew | 5 | Output word [SI] to port number DX |
| 6E | OUTSB | 5 | Output byte DS:[SI] to port number DX |
| 6F | OUTSW | 5 | Output word DS:[SI] to port number DX |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

OUTS transfers data from the memory byte or word at SI to the output port numbered by the DX register.

OUTS does not allow the specification of the port number as an immediate value. The port must be addressed through the DX register.

After the transfer is made, SI is automatically advanced. If the direction flag is 0 (CLD was executed), SI increments; if the direction flag is 1 (STD was executed), SI decrements. SI increments or decrements by 1 if a byte was moved; by 2 if a word was moved.

OUTS can be preceded by the REP prefix for block output of CX bytes or words. Refer to the REP instruction for details of this operation.

Intel reserves I/O port addresses 00F8H through 00FFH; these addresses should not be used.

NOTE

Not all output devices can handle the rate at which this instruction transfers data.

PROTECTED MODE EXCEPTIONS

#GP(0) if $CPL \geq IOPL$. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

POP—Pop a Word from the Stack

| Opcode | Instruction | Clocks | Description |
|---------------|---------------|---------|-------------------------------------|
| 1F | POP DS | 5,pm=20 | Pop top of stack into DS |
| 07 | POP ES | 5,pm=20 | Pop top of stack into ES |
| 17 | POP SS | 5,pm=20 | Pop top of stack into SS |
| 8F /0 | POP <i>mw</i> | 5 | Pop top of stack into memory word |
| 58+ <i>rw</i> | POP <i>rw</i> | 5 | Pop top of stack into word register |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The word on the top of the iAPX 286 stack, addressed by SS:SP, replaces the previous contents of the memory, register, or segment register operand. The stack pointer SP is incremented by 2 to point to the new top of stack.

If the destination operand is another segment register (DS, ES, or SS), the value popped must be a selector. In protected mode, loading the selector initiates automatic loading of the descriptor information associated with that selector into the hidden part of the segment

register; loading also initiates validation of both the selector and the descriptor information.

A null value (0000-0003) may be loaded into the DS or ES register without causing a protection exception. Attempts to reference memory using a segment register with a null value will cause #GP(0) exception. No memory reference will occur. The saved value of the segment register will be null.

A POP SS instruction will inhibit all interrupts, including NMI, until after the execution of the next instruction. This permits a POP SP instruction to be performed first.

Following is a listing of the protected-mode checks and actions taken in the loading of a segment register:

If SS is loaded:

- If selector is null then #GP(0)
- Selector index must be within its descriptor table limits else #GP (selector)
- Selector's RPL must equal CPL else #GP (selector)
- AR byte must indicate a writable data segment else #GP (selector)
- DPL in the AR byte must equal CPL else #GP (selector)
- Segment must be marked PRESENT else #SS (selector)
- Load SS register with selector
- Load SS cache with descriptor

If ES or DS is loaded with non-null selector:

- AR byte must indicate data or readable code segment else #GP (selector)
- If data or non-conforming code, then both the RPL and the CPL must be less than or equal to DPL in AR byte else #GP (selector)
- Segment must be marked PRESENT else #NP (selector)
- Load segment register with selector
- Load segment register cache with descriptor

If ES or DS is loaded with a null selector:

- Load segment register with selector
- Clear valid bit in cache

PROTECTED MODE EXCEPTIONS

If a segment register is being loaded, #GP, #SS, and #NP, as described in the listing above.

#GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

Otherwise, #SS(0) if the current top of stack is not within the stack segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

POPA—Pop All General Registers

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---------------------------------------|
| 61 | POPA | 19 | Pop in order: DI,SI,BP,SP,BX,DX,CX,AX |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

POPA pops the eight general registers given in the description above, except that the SP value is discarded instead of loaded into SP. POPA reverses a previous PUSHA, restoring

the general registers to their values before PUSHA was executed. The first register popped is DI.

PROTECTED MODE EXCEPTIONS

#SS(0) if the starting or ending stack address is not within the stack segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

POPF—Pop from Stack into the Flags Register

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--------------------------------------|
| 9D | POPF | 5 | Pop top of stack into flags register |

FLAGS MODIFIED

Entire flags register is popped from stack

FLAGS UNDEFINED

None

OPERATION

The top of the iAPX 286 stack, pointed to by SS:SP, is copied into the iAPX 286 flags register. The stack pointer SP is incremented by 2 to point to the new top of stack. The flags, from the top bit (bit 15) to the bottom (bit 0), are as follows: undefined, nested task, I/O privilege level (2 bits), overflow, direction, interrupts enabled, trap, sign, zero, undefined, auxiliary carry, undefined, parity, undefined, and carry.

The I/O privilege level will be altered only when executing at privilege level 0. The interrupt enable flag will be altered only when executing at a level at least as privileged as the I/O privilege level. (Real Address mode is equivalent to privilege level 0.) If you execute a POPF instruction with insufficient privilege, there will be no exception nor will the privileged bits be changed.

PROTECTED MODE EXCEPTIONS

#SS(0) if the top of stack is not within the stack segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at 0FFFFH.

PUSH—Push a Word onto the Stack

| Opcode | Instruction | Clocks | Description |
|--------|----------------|--------|-----------------------------------|
| 06 | PUSH ES | 3 | Push ES |
| 0E | PUSH CS | 3 | Push CS |
| 16 | PUSH SS | 3 | Push SS |
| 1E | PUSH DS | 3 | Push DS |
| 50+ | PUSH <i>rw</i> | 3 | Push word register |
| FF | PUSH <i>mw</i> | 5 | Push memory word |
| 68 | PUSH <i>dw</i> | 3 | Push immediate word |
| 6A | PUSH <i>db</i> | 3 | Push immediate sign-extended byte |

FLAGS MODIFIED

None

which pushes the new (decremented by 2) value.

PROTECTED MODE EXCEPTIONS

#SS(0) if the new value of SP is outside the stack segment limit.

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments;
#SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

None; the 80286 will shut down if SP = 1—due to lack of stack space.

FLAGS UNDEFINED

None

OPERATION

The stack pointer SP is decremented by 2, and the operand is placed on the new top of stack, which is pointed to by SS:SP.

The iAPX 286 PUSH SP instruction pushes the value of SP as it existed before the instruction. This differs from the iAPX 86,

PUSHA—Push All General Registers

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---|
| 60 | PUSHA | 17 | Push in order: AX,CX,DX,BX,original SP,BP,SI,DI |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

PUSHA saves the registers noted above on the iAPX 286 stack. The stack pointer SP is decremented by 16 to hold the 8 word values. Since the registers are pushed onto the stack in the order in which they were given, they

will appear in the 16 new stack bytes in the reverse order. The last register pushed is DI.

PROTECTED MODE EXCEPTIONS

#SS(0) if the starting or ending address is outside the stack segment limit.

REAL ADDRESS MODE EXCEPTIONS

The 80286 will shut down if SP = 1, 3, or 5 before executing PUSHA. If SP = 7, 9, 11, 13, or 15, exception 13 will occur.

PUSHF—Push Flags Register onto the Stack

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---------------------|
| 9C | PUSHF | 3 | Push flags register |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The stack pointer SP is decremented by 2, and the iAPX 286 flags register is copied to the new top of stack, which is pointed to by SS:SP. The flags, from the top bit (15) to the bottom bit (0), are as follows: undefined,

nested task, I/O privilege level (2 bits), overflow, direction, interrupts enabled, trap, sign, zero, undefined, auxiliary carry, undefined, parity, undefined, and carry.

PROTECTED MODE EXCEPTIONS

#SS(0) if the new value of SP is outside the stack segment limit.

REAL ADDRESS MODE EXCEPTIONS

None; the 80286 will shut down if SP = 1—due to lack of stack space.

RCL/RCR/ROL/ROR—Rotate Instructions

| Opcode | Instruction | Clocks-N* | Description |
|-----------------|---------------------------|-----------|--|
| D0 /2 | RCL <i>eb</i> ,1 | 2,mem=7 | Rotate 9-bits (CF, EA byte) left once |
| D2 /2 | RCL <i>eb</i> ,CL | 5,mem=8 | Rotate 9-bits (CF, EA byte) left CL times |
| C0 /2 <i>db</i> | RCL <i>eb</i> , <i>db</i> | 5,mem=8 | Rotate 9-bits (CF, EA byte) left <i>db</i> times |
| D1 /2 | RCL <i>ew</i> ,1 | 2,mem=7 | Rotate 17-bits (CF, EA word) left once |
| D3 /2 | RCL <i>ew</i> ,CL | 5,mem=8 | Rotate 17-bits (CF, EA word) left CL times |
| C1 /2 <i>db</i> | RCL <i>ew</i> , <i>db</i> | 5,mem=8 | Rotate 17-bits (CF, EA word) left <i>db</i> times |
| D0 /3 | RCR <i>eb</i> ,1 | 2,mem=7 | Rotate 9-bits (CF, EA byte) right once |
| D2 /3 | RCR <i>eb</i> ,CL | 5,mem=8 | Rotate 9-bits (CF, EA byte) right CL times |
| C0 /3 <i>db</i> | RCR <i>eb</i> , <i>db</i> | 5,mem=8 | Rotate 9-bits (CF, EA byte) right <i>db</i> times |
| D1 /3 | RCR <i>ew</i> ,1 | 2,mem=7 | Rotate 17-bits (CF, EA word) right once |
| D3 /3 | RCR <i>ew</i> ,CL | 5,mem=8 | Rotate 17-bits (CF, EA word) right CL times |
| C1 /3 <i>db</i> | RCR <i>ew</i> , <i>db</i> | 5,mem=8 | Rotate 17-bits (CF, EA word) right <i>db</i> times |
| D0 /0 | ROL <i>eb</i> ,1 | 2,mem=7 | Rotate 8-bit EA byte left once |
| D2 /0 | ROL <i>eb</i> ,CL | 5,mem=8 | Rotate 8-bit EA byte left CL times |
| C0 /0 <i>db</i> | ROL <i>eb</i> , <i>db</i> | 5,mem=8 | Rotate 8-bit EA byte left <i>db</i> times |
| D1 /0 | ROL <i>ew</i> ,1 | 2,mem=7 | Rotate 16-bit EA word left once |
| D3 /0 | ROL <i>ew</i> ,CL | 5,mem=8 | Rotate 16-bit EA word left CL times |
| C1 /0 <i>db</i> | ROL <i>ew</i> , <i>db</i> | 5,mem=8 | Rotate 16-bit EA word left <i>db</i> times |
| D0 /1 | ROR <i>eb</i> ,1 | 2,mem=7 | Rotate 8-bit EA byte right once |
| D2 /1 | ROR <i>eb</i> ,CL | 5,mem=8 | Rotate 8-bit EA byte right CL times |
| C0 /1 <i>db</i> | ROR <i>eb</i> , <i>db</i> | 5,mem=8 | Rotate 8-bit EA byte right <i>db</i> times |
| D1 /1 | ROR <i>ew</i> ,1 | 2,mem=7 | Rotate 16-bit EA word right once |
| D3 /1 | ROR <i>ew</i> ,CL | 5,mem=8 | Rotate 16-bit EA word right CL times |
| C1 /1 <i>db</i> | ROR <i>ew</i> , <i>db</i> | 5,mem=8 | Rotate 16-bit EA word right <i>db</i> times |

* Add 1 clock to the times shown for each rotate made

FLAGS MODIFIED

Overflow (only for single rotates), carry

FLAGS UNDEFINED

Overflow for multi-bit rotates

OPERATION

Each rotate instruction shifts the bits of the register or memory operand given. The left rotate instructions shift all of the bits upward, except for the top bit, which comes back around to the bottom. The right rotate instructions do the reverse: the bits shift downward, with the bottom bit coming around to the top.

For the RCL and RCR instructions, the carry flag is part of the rotated quantity. RCL shifts the carry flag into the bottom bit and shifts the top bit into the carry flag; RCR shifts the

carry flag into the top bit and shifts the bottom bit into the carry flag. For the ROL and ROR instructions, the original value of the carry flag is not a part of the result; nonetheless, the carry flag receives a copy of the bit that was shifted from one end to the other.

The rotate is repeated the number of times indicated by the second operand, which is either an immediate number or the contents of the CL register. To reduce the maximum execution time, the iAPX 286 does not allow rotation counts greater than 31. If a rotation count greater than 31 is attempted, only the bottom five bits of the rotation are used. The iAPX 86 does not mask rotate counts.

The overflow flag is set only for the single-rotate (second operand = 1) forms of the

instructions. The OF bit is set to be accurate if a shift of length 1 is done. Since it is undefined for all other values, including a zero shift, it can always be set for the count-of-1 case regardless of the actual count. For left shifts/rotates, the CF bit after the shift is XORed with the high-order result bit. For right shifts/rotates, the high-order two bits of the result are XORed to get OF.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

REP/REPE/REPNE—Repeat Following String Operation

| Opcode | Instruction | Clocks* | Description |
|--------|-------------------------|---------|---|
| F3 6C | REP INS <i>eb</i> ,DX | 5+4*CX | Input CX bytes from port DX into ES:[DI] |
| F3 6D | REP INS <i>ew</i> ,DX | 5+4*CX | Input CX words from port DX into ES:[DI] |
| F3 6C | REP INSB | 5+4*CX | Input CX bytes from port DX into ES:[DI] |
| F3 6D | REP INSW | 5+4*CX | Input CX words from port DX into ES:[DI] |
| F3 A4 | REP MOVSB <i>mb,mb</i> | 5+4*CX | Move CX bytes from [SI] to ES:[DI] |
| F3 A5 | REP MOVSW <i>mw,mw</i> | 5+4*CX | Move CX words from [SI] to ES:[DI] |
| F3 A4 | REP MOVSB | 5+4*CX | Move CX bytes from DS:[SI] to ES:[DI] |
| F3 A5 | REP MOVSW | 5+4*CX | Move CX words from DS:[SI] to ES:[DI] |
| F3 6E | REP OUTS <i>DX,eb</i> | 5+4*CX | Output CX bytes from [SI] to port DX |
| F3 6F | REP OUTS <i>DX,ew</i> | 5+4*CX | Output CX words from [SI] to port DX |
| F3 6E | REP OUTSB | 5+4*CX | Output CX bytes from DS:[SI] to port DX |
| F3 6F | REP OUTSW | 5+4*CX | Output CX words from DS:[SI] to port DX |
| F3 AA | REP STOS <i>mb</i> | 4+3*CX | Fill CX bytes at ES:[DI] with AL |
| F3 AB | REP STOS <i>mw</i> | 4+3*CX | Fill CX words at ES:[DI] with AX |
| F3 AA | REP STOSB | 4+3*CX | Fill CX bytes at ES:[DI] with AL |
| F3 AB | REP STOSW | 4+3*CX | Fill CX words at ES:[DI] with AX |
| F3 A6 | REPE CMPS <i>mb,mb</i> | 5+9*N | Find nonmatching bytes in ES:[DI] and [SI] |
| F3 A7 | REPE CMPS <i>mw,mw</i> | 5+9*N | Find nonmatching words in ES:[DI] and [SI] |
| F3 A6 | REPE CMPSB | 5+9*N | Find nonmatching bytes in ES:[DI] and DS:[SI] |
| F3 A7 | REPE CMPSW | 5+9*N | Find nonmatching words in ES:[DI] and DS:[SI] |
| F3 AE | REPE SCAS <i>mb</i> | 5+8*N | Find non-AL byte starting at ES:[DI] |
| F3 AF | REPE SCAS <i>mw</i> | 5+8*N | Find non-AX word starting at ES:[DI] |
| F3 AE | REPE SCASB | 5+8*N | Find non-AL byte starting at ES:[DI] |
| F3 AF | REPE SCASW | 5+8*N | Find non-AX word starting at ES:[DI] |
| F2 A6 | REPNE CMPS <i>mb,mb</i> | 5+9*N | Find matching bytes in ES:[DI] and [SI] |
| F2 A7 | REPNE CMPS <i>mw,mw</i> | 5+9*N | Find matching words in ES:[DI] and [SI] |
| F2 A6 | REPNE CMPSB | 5+9*N | Find matching bytes in ES:[DI] and DS:[SI] |
| F2 A7 | REPNE CMPSW | 5+9*N | Find matching words in ES:[DI] and DS:[SI] |
| F2 AE | REPNE SCAS <i>mb</i> | 5+8*N | Find AL, starting at ES:[DI] |
| F2 AF | REPNE SCAS <i>mw</i> | 5+8*N | Find AX, starting at ES:[DI] |
| F2 AE | REPNE SCASB | 5+8*N | Find AL, starting at ES:[DI] |
| F2 AF | REPNE SCASW | 5+8*N | Find AX, starting at ES:[DI] |

* N denotes the number of iterations actually executed.

FLAGS MODIFIED

By CMPS and SCAS, none by REP

Thus, REPE stands for “Repeat while equal,”
REPNE for “Repeat while not equal.”

FLAGS UNDEFINED

None

The REP prefixes make sense only in the contexts listed above. They cannot be applied to anything other than string operations.

OPERATION

REP, REPE, and REPNE are prefix operations. These prefixes cause the string instruction that follows to be repeated CX times or (for REPE and REPNE) until the indicated condition in the zero flag is no longer met.

Synonymous forms of REPE and REPNE are REPZ and REPNZ, respectively.

The REP prefixes apply only to one string instruction at a time. To repeat a block of instructions, use a LOOP construct.

The precise action for each iteration is as follows:

1. Check the CX register. If it is zero, exit the iteration and move to the next instruction.
2. Acknowledge any pending interrupts.
3. Perform the string operation once.
4. Decrement CX by 1; no flags are modified.
5. If the string operation is SCAS or CMPS, check the zero flag. If the repeat condition does not hold, then exit the iteration and move to the next instruction. Exit if the prefix is REPE and ZF=0 (the last comparison was not equal), or if the prefix is REPNE and ZF=1 (the last comparison was equal).
6. Go to step 1 for the next iteration.

As defined by the individual string-ops, the direction of movement through the block is determined by the direction flag. If the direction flag is 1 (STD was executed), SI and/or DI start at the end of the block and move

backward; if the direction flag is 0 (CLD was executed), SI and/or DI start at the beginning of the block and move forward.

For repeated SCAS and CMPS operations the repeat can be exited for one of two different reasons: the CX count can be exhausted or the zero flag can fail the repeat condition. Your code will probably want to distinguish between the two cases. It can do so via either the JCXZ instruction or the conditional jumps that test the zero flag (JZ, JNZ, JE, and JNE).

NOTE

Not all input/output ports can handle the rate at which the repeated I/O instructions execute.

PROTECTED MODE EXCEPTIONS

None by REP; exceptions can be generated when the string-op is executed.

REAL ADDRESS MODE EXCEPTIONS

None by REP; exceptions can be generated when the string-op is executed.

RET—Return from Procedure

| Opcode | Instruction | Clocks* | Description |
|--------------|---------------|----------|--|
| CB | RET | 15,pm=25 | Return to far caller, same privilege |
| CB | RET | 55 | Return, lesser privilege, switch stacks |
| C3 | RET | 11 | Return to near caller, same privilege |
| CA <i>dw</i> | RET <i>dw</i> | 15,pm=25 | RET (far), same privilege, pop <i>dw</i> bytes |
| CA <i>dw</i> | RET <i>dw</i> | 55 | RET (far), lesser privilege, pop <i>dw</i> bytes |
| C2 <i>dw</i> | RET <i>dw</i> | 11 | RET (near), same privilege, pop <i>dw</i> bytes pushed before Call |

*Add 1 clock for each byte in the next instruction executed.

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

RET transfers control to a return address located on the stack. The address is usually placed on the stack by a CALL instruction; in that case, the return is made to the instruction that follows the CALL.

There is an optional numeric parameter to RET. It gives the number of stack bytes to be released after the return address is popped. These bytes are typically used as input parameters to the procedure called.

For the intra-segment return, the address on the stack is a 2-byte quantity popped into IP. The CS register is unchanged.

For the inter-segment return, the address on the stack is a 4-byte-long pointer. The offset is popped first, followed by the selector. In real address mode, CS and IP are directly loaded.

In protected mode, an inter-segment return causes the processor to consult the descriptor addressed by the return selector. The AR byte of the descriptor must indicate a code segment of equal or less privilege (of greater or equal numeric value) than the current privilege level. Returns to a lesser privilege level cause the stack to be reloaded from the value saved beyond the parameter block.

The DS and ES segment registers may be set to zero by the inter-segment RET instruction. If these registers refer to segments which cannot be used by the new privilege level, they are set to zero to prevent unauthorized access.

The following list of checks and actions describes the protected-mode inter-segment return in detail.

Inter-segment RET:

Second word on stack must be within stack limits else #SS(0)
 Return selector RPL must be \geq CPL else #GP (return selector)
 If return selector RPL = CPL then

RETURN TO SAME LEVEL:

Return selector must be non-null else #GP(0)
 Selector index must be within its descriptor table limits else #GP (selector)
 Descriptor AR byte must indicate code segment else #GP (selector)
 If non-conforming then code segment DPL must equal CPL else #GP (selector)
 If conforming then code segment DPL must be \leq CPL else #GP (selector)
 Code segment must be PRESENT else #NP (selector)
 Top word on stack must be within stack limits else #SS(0)
 IP must be in code segment limit else #GP(0)
 Load CS:IP from stack
 Load CS-cache with descriptor
 Increment SP by 4 plus the immediate offset if it exists

Else

RETURN TO OUTER PRIVILEGE LEVEL:

Top (8+immediate) bytes on stack must be within stack limits else #SS(0)
 Examine return CS selector (at SP+2) and associated descriptor:
 Selector must be non-null else #GP(0)
 Selector index must be within its descriptor table limits else #GP (selector)
 Descriptor AR byte must indicate code segment else #GP (selector)
 If non-conforming then code segment DPL must equal return selector RPL else #GP (selector)
 If conforming then code segment DPL must be \leq return selector RPL else #GP (selector)
 Segment must be PRESENT else #NP (selector)
 Examine return SS selector (at SP+6+imm) and associated descriptor:
 Selector must be non-null else #GP(0)
 Selector index must be within its descriptor table limits else #GP (selector)
 Selector RPL must equal the RPL of the return CS selector else #GP (selector)
 Descriptor AR byte must indicate a writable data segment else #GP (selector)
 Descriptor DPL must equal the RPL of the return CS selector else #GP (selector)
 Segment must be PRESENT else #NP (selector)
 IP must be in code segment limit else # GP(0)
 Set CPL to the RPL of the return CS selector
 Load CS:IP from stack
 Set CS RPL to CPL
 Increment SP by 4 plus the immediate offset if it exists
 Load SS:SP from stack
 Load the CS-cache with the return CS descriptor
 Load the SS-cache with the return SS descriptor

For each of ES and DS:

 If the current register setting is not valid for the outer level, set the register to null (selector = AR = 0)
 To be valid, the register setting must satisfy the following properties:
 Selector index must be within descriptor table limits
 Descriptor AR byte must indicate data or readable code segment
 If segment is data or non-conforming code, then:
 DPL must be \geq CPL, or
 DPL must be \geq RPL

PROTECTED MODE EXCEPTIONS

#GP, #NP, or #SS, as described in the above listing.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 if the stack pop wraps around from 0FFFFH to 0.

SAHF—Store AH into Flags

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---|
| 9E | SAHF | 2 | Store AH into flags SF ZF xx AF xx PF xx CF |

FLAGS MODIFIED

Sign, zero, auxiliary carry, parity, carry

from the AH register, from bits 7, 6, 4, 2, and 0, respectively.

FLAGS UNDEFINED

None

PROTECTED MODE EXCEPTIONS

None

OPERATION

The flags listed above are loaded with values

REAL ADDRESS MODE EXCEPTIONS

None

SAL/SAR/SHL/SHR—Shift Instructions

| Opcode | Instruction | Clocks-N* | Description |
|--------|-------------------------------------|-----------|---|
| D0 /4 | SAL <i>eb</i> ,1 | 2,mem=7 | Multiply EA byte by 2, once |
| D2 /4 | SAL <i>eb</i> ,CL | 5,mem=8 | Multiply EA byte by 2, CL times |
| C0 /4 | <i>db</i> SAL <i>eb</i> , <i>db</i> | 5,mem=8 | Multiply EA byte by 2, <i>db</i> times |
| D1 /4 | SAL <i>ew</i> ,1 | 2,mem=7 | Multiply EA word by 2, once |
| D3 /4 | SAL <i>ew</i> ,CL | 5,mem=8 | Multiply EA word by 2, CL times |
| C1 /4 | <i>db</i> SAL <i>ew</i> , <i>db</i> | 5,mem=8 | Multiply EA word by 2, <i>db</i> times |
| D0 /7 | SAR <i>eb</i> ,1 | 2,mem=7 | Signed divide EA byte by 2, once |
| D2 /7 | SAR <i>eb</i> ,CL | 5,mem=8 | Signed divide EA byte by 2, CL times |
| C0 /7 | <i>db</i> SAR <i>eb</i> , <i>db</i> | 5,mem=8 | Signed divide EA byte by 2, <i>db</i> times |
| D1 /7 | SAR <i>ew</i> ,1 | 2,mem=7 | Signed divide EA word by 2, once |
| D3 /7 | SAR <i>ew</i> ,CL | 5,mem=8 | Signed divide EA word by 2, CL times |
| C1 /7 | <i>db</i> SAR <i>ew</i> , <i>db</i> | 5,mem=8 | Signed divide EA word by 2, <i>db</i> times |
| D0 /5 | SHR <i>eb</i> ,1 | 2,mem=7 | Unsigned divide EA byte by 2, once |
| D2 /5 | SHR <i>eb</i> ,CL | 5,mem=8 | Unsigned divide EA byte by 2, CL times |
| C0 /5 | <i>db</i> SHR <i>eb</i> , <i>db</i> | 5,mem=8 | Unsigned divide EA byte by 2, <i>db</i> times |
| D1 /5 | SHR <i>ew</i> ,1 | 2,mem=7 | Unsigned divide EA word by 2, once |
| D3 /5 | SHR <i>ew</i> ,CL | 5,mem=8 | Unsigned divide EA word by 2, CL times |
| C1 /5 | <i>db</i> SHR <i>ew</i> , <i>db</i> | 5,mem=8 | Unsigned divide EA word by 2, <i>db</i> times |

* Add 1 clock to the times shown for each shift performed

FLAGS MODIFIED

Overflow (only for single-shift form), carry, zero, overflow, parity, sign

FLAGS UNDEFINED

Auxiliary carry; also overflow for multibit shifts (only).

OPERATION

SAL (or its synonym SHL) shifts the bits of the operand upward. The high-order bit is shifted into the carry flag, and the low-order bit is set to 0.

SAR and SHR shift the bits of the operand downward. The low-order bit is shifted into the carry flag. The effect is to divide the operand by 2. SAR performs a signed divide: the high-order bit remains the same. SHR performs an unsigned divide: the high-order bit is set to 0.

The shift is repeated the number of times indicated by the second operand, which is either an immediate number or the contents of the CL register. To reduce the maximum

execution time, the iAPX 286 does not allow shift counts greater than 31. If a shift count greater than 31 is attempted, only the bottom five bits of the shift count are used. The iAPX 86 uses all 8 bits of the shift count.

The overflow flag is set only if the single-shift forms of the instructions are used. For left shifts, it is set to 0 if the high bit of the answer is the same as the result carry flag (i.e., the top two bits of the original operand were the same); it is set to 1 if they are different. For SAR it is set to 0 for all single shifts. For SHR, it is set to the high-order bit of the original operand.

PROTECTED MODE EXCEPTIONS

#GP(0) if the operand is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

SBB—Integer Subtraction With Borrow

| Opcode | Instruction | Clocks | Description |
|-----------------|-------------------|---------|---|
| 18 /r | SBB <i>eb,rb</i> | 2,mem=7 | Subtract with borrow byte register from EA byte |
| 19 /r | SBB <i>ew,rw</i> | 2,mem=7 | Subtract with borrow word register from EA word |
| 1A /r | SBB <i>rb,eb</i> | 2,mem=7 | Subtract with borrow EA byte from byte register |
| 1B /r | SBB <i>rw,ew</i> | 2,mem=7 | Subtract with borrow EA word from word register |
| 1C <i>db</i> | SBB AL, <i>db</i> | 3 | Subtract with borrow imm. byte from AL |
| 1D <i>dw</i> | SBB AX, <i>dw</i> | 3 | Subtract with borrow imm. word from AX |
| 80 /3 <i>db</i> | SBB <i>eb,db</i> | 3,mem=7 | Subtract with borrow imm. byte from EA byte |
| 81 /3 <i>dw</i> | SBB <i>ew,dw</i> | 3,mem=7 | Subtract with borrow imm. word from EA word |
| 83 /3 <i>db</i> | SBB <i>ew,db</i> | 3,mem=7 | Subtract with borrow imm. byte from EA word |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

None

OPERATION

The second operand is added to the carry flag and the result is subtracted from the first operand. The first operand is replaced with the result of the subtraction, and the flags are set accordingly.

When a byte-immediate value is subtracted from a word operand, the immediate value is first sign-extended.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

SCAS/SCASB/SCASW—Compare String Data

| Opcode | Instruction | Clocks | Description |
|--------|----------------|--------|--|
| AE | SCAS <i>mb</i> | 7 | Compare bytes AL - ES:[DI], advance DI |
| AF | SCAS <i>mw</i> | 7 | Compare words AX - ES:[DI], advance DI |
| AE | SCASB | 7 | Compare bytes AL - ES:[DI], advance DI |
| AF | SCASW | 7 | Compare words AX - ES:[DI], advance DI |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

None

OPERATION

SCAS subtracts the memory byte or word at ES:DI from the AL or AX register. The result is discarded; only the flags are set. The operand must be addressable from the ES register; no segment override is possible.

After the comparison is made, DI is automatically advanced. If the direction flag is 0 (CLD was executed), DI increments; if the direction flag is 1 (STD was executed), DI

decrements. DI increments or decrements by 1 if bytes were compared; by 2 if words were compared.

SCAS can be preceded by the REPE or REPNE prefix for a block search of CX bytes or words. Refer to the REP instruction for details of this operation.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

SGDT/SIDT—Store Global/Interrupt Descriptor Table Register

| Opcode | Instruction | Clocks | Description |
|----------|---------------|--------|---|
| 0F 01 /0 | SGDT <i>m</i> | 11 | Store Global Descriptor Table register to <i>m</i> |
| 0F 01 /1 | SIDT <i>m</i> | 12 | Store Interrupt Descriptor Table register to <i>m</i> |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The contents of the descriptor table register are copied to six bytes of memory indicated by the operand. The LIMIT field of the register goes to the first word at the effective address; the next three bytes get the BASE field of the register; and the last byte is undefined.

SGDT and SIDT appear only in operating systems software; they are not used in applications programs.

PROTECTED MODE EXCEPTIONS

#UD if the destination operand is a register.
 #GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

These instructions are valid in Real Address mode to facilitate power-up or to reset initialization prior to entering Protected mode.

#UD if the destination operand is a register.
 Interrupt 13 for a word operand at offset 0FFFFH.

SLDT—Store Local Descriptor Table Register

| Opcode | Instruction | Clocks | Description |
|----------|----------------|---------|--|
| 0F 00 /0 | SLDT <i>ew</i> | 2,mem=3 | Store Local Descriptor Table register to EA word |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The Local Descriptor Table register is stored in the 2-byte register or memory location indicated by the effective address operand. This register is a selector that points into the Global Descriptor Table.

SLDT appears only in operating systems software. It is not used in applications programs.

PROTECTED MODE EXCEPTIONS

#GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 6; SLDT is not recognized in Real Address mode.

SMSW—Store Machine Status Word

| Opcode | Instruction | Clocks | Description |
|----------|----------------|---------|--------------------------------------|
| 0F 01 /4 | SMSW <i>ew</i> | 2,mem=3 | Store Machine Status Word to EA word |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The Machine Status Word is stored in the 2-byte register or memory location indicated by the effective address operand.

PROTECTED MODE EXCEPTIONS

#GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

STC—Set Carry Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|----------------|
| F9 | STC | 2 | Set carry flag |

FLAGS MODIFIED

Carry=1

FLAGS UNDEFINED

None

OPERATION

The carry flag is set to 1.

PROTECTED MODE EXCEPTIONS

None

REAL ADDRESS MODE EXCEPTIONS

None

STD—Set Direction Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--|
| FD | STD | 2 | Set direction flag so SI and DI will decrement |

FLAGS MODIFIED

Direction = 1

index registers (SI and/or DI) on which they operate.

FLAGS UNDEFINED

None

PROTECTED MODE EXCEPTIONS

None

OPERATION

The direction flag is set to 1. This causes all subsequent string operations to decrement the

REAL ADDRESS MODE EXCEPTIONS

None

STI—Set Interrupt Enable Flag

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|---|
| FB | STI | 2 | Set interrupt enable flag, interrupts enabled |

FLAGS MODIFIED

Interrupt=1 (enabled)

FLAGS UNDEFINED

None

OPERATION

The interrupts-enabled flag is set to 1. The iAPX 286 will now respond to external interrupts after executing the *next* instruction if the next instruction allows the interrupt flag to remain enabled. Therefore, if external interrupts are disabled and the user codes STI, RET (such as at the end of a subrou-

tine) the RET is allowed to execute before external interrupts are recognized. Also, if external interrupts are disabled and the user codes STI, CLI, then external interrupts are not recognized because the CLI instruction clears the interrupt flag during its execution.

PROTECTED MODE EXCEPTIONS

#GP(0) if the current privilege level is bigger (has less privilege) than the I/O privilege level.

REAL ADDRESS MODE EXCEPTIONS

None

STOS/STOSB/STOSW—Store String Data

| Opcode | Instruction | Clocks | Description |
|--------|----------------|--------|--------------------------------------|
| AA | STOS <i>mb</i> | 3 | Store AL to byte ES:[DI], advance DI |
| AB | STOS <i>mw</i> | 3 | Store AX to word ES:[DI], advance DI |
| AA | STOSB | 3 | Store AL to byte ES:[DI], advance DI |
| AB | STOSW | 3 | Store AX to word ES:[DI], advance DI |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

STOS transfers the contents the AL or AX register to the memory byte or word at ES:DI. The operand must be addressable from the ES register; no segment override is possible.

After the transfer is made, DI is automatically advanced. If the direction flag is 0 (CLD was executed), DI increments; if the direction flag is 1 (STD was executed), DI decrements.

DI increments or decrements by 1 if a byte was moved; by 2 if a word was moved.

STOS can be preceded by the REP prefix for a block fill of CX bytes or words. Refer to the REP instruction for details of this operation.

PROTECTED MODE EXCEPTIONS

#GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

STR—Store Task Register

| Opcode | Instruction | Clocks | Description |
|----------|---------------|---------|--------------------------------|
| 0F 00 /1 | STR <i>ew</i> | 2,mem=3 | Store Task Register to EA word |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The contents of the Task Register are copied to the 2-byte register or memory location indicated by the effective address operand.

PROTECTED MODE EXCEPTIONS

#GP(0) if the destination is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 6; STR is not recognized in Real Address mode.

SUB—Integer Subtraction

| Opcode | Instruction | Clocks | Description |
|-----------------|-------------------|---------|--------------------------------------|
| 28 <i>/r</i> | SUB <i>eb,rb</i> | 2,mem=7 | Subtract byte register from EA byte |
| 29 <i>/r</i> | SUB <i>ew,rw</i> | 2,mem=7 | Subtract word register from EA word |
| 2A <i>/r</i> | SUB <i>rb,eb</i> | 2,mem=7 | Subtract EA byte from byte register |
| 2B <i>/r</i> | SUB <i>rw,ew</i> | 2,mem=7 | Subtract EA word from word register |
| 2C <i>db</i> | SUB AL, <i>db</i> | 3 | Subtract immediate byte from AL |
| 2D <i>dw</i> | SUB AX, <i>dw</i> | 3 | Subtract immediate word from AX |
| 80 <i>/5 db</i> | SUB <i>eb,db</i> | 3,mem=7 | Subtract immediate byte from EA byte |
| 81 <i>/5 dw</i> | SUB <i>ew,dw</i> | 3,mem=7 | Subtract immediate word from EA word |
| 83 <i>/5 db</i> | SUB <i>ew,db</i> | 3,mem=7 | Subtract immediate byte from EA word |

FLAGS MODIFIED

Overflow, sign, zero, auxiliary carry, parity, carry

FLAGS UNDEFINED

None

OPERATION

The second operand is subtracted from the first operand, and the first operand is replaced with the result.

When a byte-immediate value is subtracted from a word operand, the immediate value is first sign-extended.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

TEST—Logical Compare

| Opcode | Instruction | Clocks | Description |
|-----------------|--------------------|---------|--|
| 84 /r | TEST <i>eb,rb</i> | 2,mem=6 | AND byte register into EA byte for flags only |
| 84 /r | TEST <i>rb,eb</i> | 2,mem=6 | AND EA byte into byte register for flags only |
| 85 /r | TEST <i>ew,rw</i> | 2,mem=6 | AND word register into EA word for flags only |
| 85 /r | TEST <i>rw,ew</i> | 2,mem=6 | AND EA word into word register for flags only |
| A8 <i>db</i> | TEST AL, <i>db</i> | 3 | AND immediate byte into AL for flags only |
| A9 <i>dw</i> | TEST AX, <i>dw</i> | 3 | AND immediate word into AX for flags only |
| F6 /0 <i>db</i> | TEST <i>eb,db</i> | 3,mem=6 | AND immediate byte into EA byte for flags only |
| F7 /0 <i>dw</i> | TEST <i>ew,dw</i> | 3,mem=6 | AND immediate word into EA word for flags only |

FLAGS MODIFIED

Overflow=0, sign, zero, parity, carry=0

FLAGS UNDEFINED

Auxiliary carry

OPERATION

TEST computes the bit-wise logical AND of the two operands given. Each bit of the result is 1 if both of the corresponding bits of the operands are 1; each bit is 0 otherwise. The

result of the operation is discarded; only the flags are modified.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

VERR, VERW—Verify a Segment for Reading or Writing

| Opcode | Instruction | Clocks | Description |
|----------|----------------|-----------|---|
| 0F 00 /4 | VERR <i>ew</i> | 14,mem=16 | Set ZF=1 if seg. can be read, selector <i>ew</i> |
| 0F 00 /5 | VERW <i>ew</i> | 14,mem=16 | Set ZF=1 if seg. can be written, selector <i>ew</i> |

FLAGS MODIFIED

Zero

FLAGS UNDEFINED

None

OPERATION

VERR and VERW expect the 2-byte register or memory operand to contain the value of a selector. The instructions determine whether the segment denoted by the selector is reachable from the current privilege level; the instructions also determine whether it is readable or writable. If the segment is determined to be accessible, the zero flag is set to 1; if the segment is not accessible, it is set to 0. To set ZF, the following conditions must be met:

1. The selector must denote a descriptor within the bounds of the table (GDT or LDT); that is, the selector must be “defined.”
2. The selector must denote the descriptor of a code or data segment.
3. If the instruction is VERR, the segment must be readable. If the instruction is VERW, the segment must be a writable data segment.

4. If the code segment is readable and conforming, the descriptor privilege level (DPL) can be any value for VERR. Otherwise, the DPL must be greater than or equal to (have less or the same privilege as) both the current privilege level and the selector’s RPL.

The validation performed is the same as if the segment were loaded into DS or ES and the indicated access (read or write) were performed. The zero flag receives the result of the validation. The selector’s value cannot result in a protection exception. This enables the software to anticipate possible segment access problems.

PROTECTED MODE EXCEPTIONS

The only faults that can occur are those generated by illegally addressing the memory operand which contains the selector. The selector is not loaded into any segment register, and no faults attributable to the selector operand are generated.

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments;
#SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 6; VERR and VERW are not recognized in Real Address Mode.

WAIT—Wait Until $\overline{\text{BUSY}}$ Pin Is Inactive (HIGH)

| Opcode | Instruction | Clocks | Description |
|--------|-------------|--------|--|
| 9B | WAIT | 3 | Wait until $\overline{\text{BUSY}}$ pin is inactive (HIGH) |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

WAIT suspends execution of 80286 instructions until the $\overline{\text{BUSY}}$ pin is inactive (high). The $\overline{\text{BUSY}}$ pin is driven by the 80287 numeric processor extension. WAIT is issued

to ensure that the numeric instruction being executed is complete, and to check for a possible numeric fault (see below).

PROTECTED MODE EXCEPTIONS

#NM if task switch flag in MSW is set. #MF if 80287 has detected an unmasked numeric error.

REAL ADDRESS MODE EXCEPTIONS

Same as Protected mode.

XCHG—Exchange Memory/Register with Register

| Opcode | Instruction | Clocks | Description |
|--------|------------------------------|---------|-------------------------------------|
| 86 | <i>/r</i> XCHG <i>eb,rb</i> | 3,mem=5 | Exchange byte register with EA byte |
| 86 | <i>/r</i> XCHG <i>rb,eb</i> | 3,mem=5 | Exchange EA byte with byte register |
| 87 | <i>/r</i> XCHG <i>ew,rw</i> | 3,mem=5 | Exchange word register with EA word |
| 87 | <i>/r</i> XCHG <i>rw,ew</i> | 3,mem=5 | Exchange EA word with word register |
| 90+ | <i>rw</i> XCHG AX, <i>rw</i> | 3 | Exchange word register with AX |
| 90+ | <i>rw</i> XCHG <i>rw,AX</i> | 3 | Exchange with word register |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

The two operands are exchanged. The order of the operands is immaterial. BUS LOCK is asserted for the duration of the exchange, regardless of the presence or absence of the LOCK prefix or IOPL.

PROTECTED MODE EXCEPTIONS

#GP(0) if either operand is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

XLAT—Table Look-up Translation

| Opcode | Instruction | Clocks | Description |
|--------|----------------|--------|---|
| D7 | XLAT <i>mb</i> | 5 | Set AL to memory byte DS:[BX + unsigned AL] |
| D7 | XLATB | 5 | Set AL to memory byte DS:[BX + unsigned AL] |

FLAGS MODIFIED

None

FLAGS UNDEFINED

None

OPERATION

When XLAT is executed, AL should be the unsigned index into a table addressed by DS:BX. XLAT changes the AL register from the table index into the table entry. BX is unchanged.

PROTECTED MODE EXCEPTIONS

#GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

XOR—Logical Exclusive OR

| Opcode | Instruction | Clocks | Description |
|--------|-------------------------------|---------|--|
| 30 | <i>/r</i> XOR <i>eb,rb</i> | 2,mem=7 | Exclusive-OR byte register into EA byte |
| 31 | <i>/r</i> XOR <i>ew,rw</i> | 2,mem=7 | Exclusive-OR word register into EA word |
| 32 | <i>/r</i> XOR <i>rb,eb</i> | 2,mem=7 | Exclusive-OR EA byte into byte register |
| 33 | <i>/r</i> XOR <i>rw,ew</i> | 2,mem=7 | Exclusive-OR EA word into word register |
| 34 | <i>db</i> XOR AL, <i>db</i> | 3 | Exclusive-OR immediate byte into AL |
| 35 | <i>dw</i> XOR AX, <i>dw</i> | 3 | Exclusive-OR immediate word into AX |
| 80 | <i>/6 db</i> XOR <i>eb,db</i> | 3,mem=7 | Exclusive-OR immediate byte into EA byte |
| 81 | <i>/6 dw</i> XOR <i>ew,dw</i> | 3,mem=7 | Exclusive-OR immediate word into EA word |

FLAGS MODIFIED

Overflow=0, sign, zero, parity, carry=0

FLAGS UNDEFINED

Auxiliary carry

OPERATION

XOR computes the exclusive OR of the two operands. Each bit of the result is 1 if the corresponding bits of the operands are different; each bit is 0 if the corresponding bits are

the same. The answer replaces the first operand.

PROTECTED MODE EXCEPTIONS

#GP(0) if the result is in a non-writable segment. #GP(0) for an illegal memory operand effective address in the CS, DS, or ES segments; #SS(0) for an illegal address in the SS segment.

REAL ADDRESS MODE EXCEPTIONS

Interrupt 13 for a word operand at offset 0FFFFH.

Appendix
iAPX 286/10

C

Contents

| | |
|--------------------------------------|------|
| Functional Description | C-5 |
| iAPX 286/10 Base Architecture | C-5 |
| iAPX 86 Real Address Mode | C-13 |
| Protected Virtual Address Mode | C-14 |
| System Interface | C-24 |
| System Configurations | C-34 |
| Package | C-37 |
| Absolute Maximum Ratings | C-37 |
| D.C. Characteristics | C-37 |
| A.C. Characteristics | C-38 |
| Waveforms | C-39 |
| 80286 Instruction Set Summary | C-42 |

HIGH PERFORMANCE MICROPROCESSOR WITH MEMORY MANAGEMENT AND PROTECTION

(80286, 80286-6, 80286-4)

- **High Performance Processor (Up to six times iAPX 86)**
- **Large Address Space:**
 - 16 Megabytes Physical
 - 1 Gigabyte Virtual per Task
- **Integrated Memory Management, Four-Level Memory Protection and Support for Virtual Memory and Operating Systems**
- **Two iAPX 86 Upward Compatible Operating Modes:**
 - iAPX 86 Real Address Mode
 - Protected Virtual Address Mode
- **Range of clock rates**
 - 8 MHz for 80286
 - 6 MHz for 80286-6
 - 4 MHz for 80286-4
- **Optional Processor Extension:**
 - iAPX 286/20 High Performance 80-bit Numeric Data Processor
- **Complete System Development Support:**
 - Development Software: Assembler, PL/M, Pascal, FORTRAN, and System Utilities
 - In-Circuit-Emulator (ICE™ -286)
- **High Bandwidth Bus Interface (8 Megabyte/Sec)**
- **Available in EXPRESS:**
 - Standard Temperature Range

The iAPX 286 10 (80286 part number) is an advanced, high-performance microprocessor with specially optimized capabilities for multiple user and multi-tasking systems. The 80286 has built-in memory protection that supports operating system and task isolation as well as program and data privacy within tasks. An 8 MHz iAPX 286/10 provides up to six times greater throughput than the standard 5 MHz iAPX 86 10. The 80286 includes memory management capabilities that map up to 2³⁰ (one gigabyte) of virtual address space per task into 2²⁴ bytes (16 megabytes) of physical memory.

The iAPX 286 is upward compatible with iAPX 86 and 88 software. Using iAPX 86 real address mode, the 80286 is object code compatible with existing iAPX 86, 88 software. In protected virtual address mode, the 80286 is source code compatible with iAPX 86, 88 software and may require upgrading to use virtual addresses supported by the 80286's integrated memory management and protection mechanism. Both modes operate at full 80286 performance and execute a superset of the iAPX 86 and 88's instructions.

The 80286 provides special operations to support the efficient implementation and execution of operating systems. For example, one instruction can end execution of one task, save its state, switch to a new task, load its state, and start execution of the new task. The 80286 also supports virtual memory systems by providing a segment-not-present exception and restartable instructions.

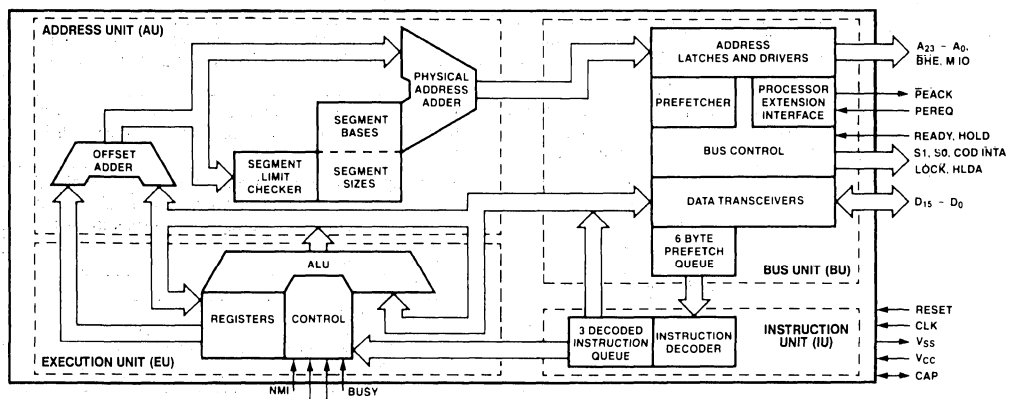


Figure 1. 80286 Internal Block Diagram

The following are trademarks of Intel Corporation and its affiliates and may be used only to identify Intel products: BXP, CREDIT, i, ICE, iCS, iM, iSate, iTel, INTEL, Intelevison, Intellink, Intelic, iMMX, iOSP, iPDS, iRMX, iSBC, iSBX, Library Manager, MCS, MULTIMODULE, Megachassis, Micromainframe, MULTIBUS, Multichannel, Plug-A-Bubble, PROMPT, Promware, RUP, RMX/80, System 2000, UPI, and the combination of iCS, iRMX, iSBC, iSBX, ICE, iICE, MCS, or UPI and a numerical suffix. Intel Corporation Assumes No Responsibility for the use of Any Circuitry Other Than Circuitry Embodied in an Intel Product. No Other Patent Licenses are implied. © INTEL CORPORATION, 1983.

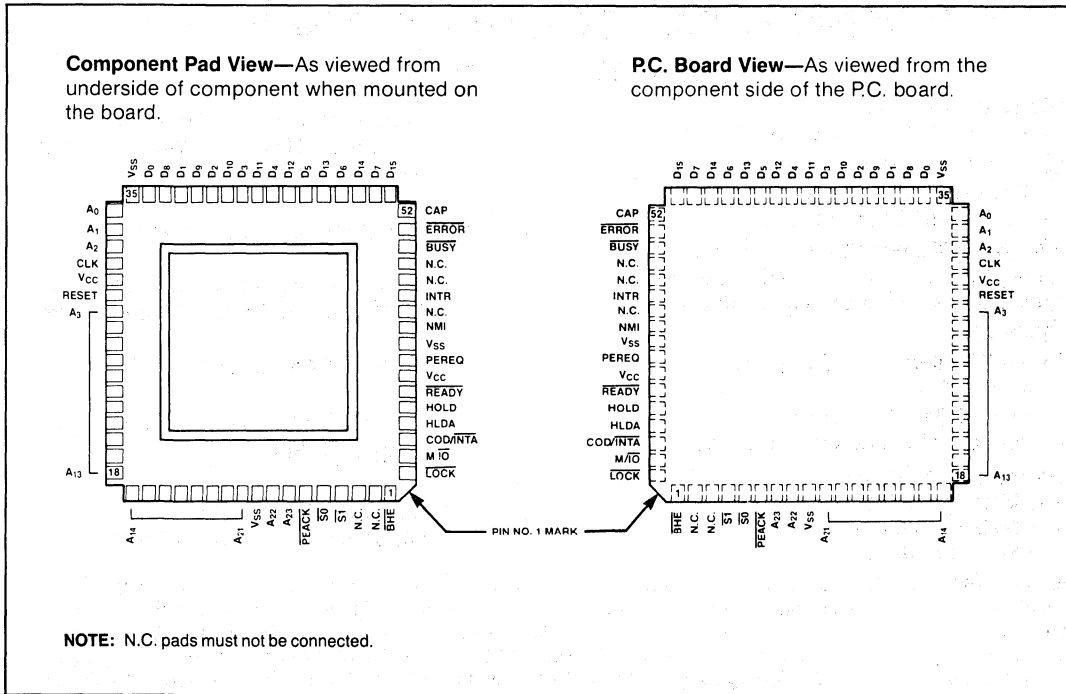


Figure 2. 80286 Pin Configuration

Table 1. Pin Description

The following pin function descriptions are for the 80286 microprocessor:

| Symbol | Type | Name and Function |
|---------------------------------|------|--|
| CLK | I | System Clock provides the fundamental timing for iAPX 286 systems. It is divided by two inside the 80286 to generate the processor clock. The internal divide-by-two circuitry can be synchronized to an external clock generator by a LOW to HIGH transition on the RESET input. |
| D ₁₅ -D ₀ | I/O | Data Bus inputs data during memory, I/O, and interrupt acknowledge read cycles; outputs data during memory and I/O write cycles. The data bus is active HIGH and floats to 3-state OFF during bus hold acknowledge. |
| A ₂₃ -A ₀ | O | Address Bus outputs physical memory and I/O port addresses. A ₀ is LOW when data is to be transferred on pins D ₇₋₀ . A ₂₃ -A ₁₆ are LOW during I/O transfers. The address bus is active HIGH and floats to 3-state OFF during bus hold acknowledge. |
| BHE | O | Bus High Enable indicates transfer of data on the upper byte of the data bus, D ₁₅₋₈ . Eight-bit oriented devices assigned to the upper byte of the data bus would normally use BHE to condition chip select functions. BHE is active LOW and floats to 3-state OFF during bus hold acknowledge. |

| BHE and A0 Encodings | | |
|----------------------|----------|--|
| BHE Value | A0 Value | Function |
| 0 | 0 | Word transfer |
| 0 | 1 | Byte transfer on upper half of data bus (D ₁₅₋₈) |
| 1 | 0 | Byte transfer on lower half of data bus (D ₇₋₀) |
| 1 | 1 | Reserved |

Table 1. Pin Description (Cont.)

| Symbol | Type | Name and Function | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------|--------------------|--|-----------------------------------|------------------------------------|--|--|--|-------------------------|--------------------|------------|------------|---------------------|---------|---|---|---|-----------------------|---|---|---|---|----------|---|---|---|---|----------|---|---|---|---|--------------------------|---|---|---|---|------------------------------------|---|---|---|---|------------------|---|---|---|---|-------------------|---|---|---|---|--------------------------|----------|---|---|---|----------|---|---|---|---|----------|---|---|---|---|-----------|---|---|---|---|--------------------------|---|---|---|---|----------|---|---|---|---|-------------------------|---|---|---|---|----------|---|---|---|---|--------------------------|
| $S\bar{1}, S\bar{0}$ | O | <p>Bus Cycle Status indicates initiation of a bus cycle and, along with $M/\bar{I}\bar{O}$ and $COD/\bar{I}NT\bar{A}$, defines the type of bus cycle. The bus is in a T_0 state whenever one or both are LOW. $S\bar{1}$ and $S\bar{0}$ are active LOW and float to 3-state OFF during bus hold acknowledge.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">80286 Bus Cycle Status Definition</th> </tr> <tr> <th>COD/$\bar{I}NT\bar{A}$</th> <th>$M/\bar{I}\bar{O}$</th> <th>$S\bar{1}$</th> <th>$S\bar{0}$</th> <th>Bus cycle initiated</th> </tr> </thead> <tbody> <tr><td>0 (LOW)</td><td>0</td><td>0</td><td>0</td><td>Interrupt acknowledge</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>Reserved</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td><td>Reserved</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>1</td><td>None; not a status cycle</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>0</td><td>IF A1 = 1 then halt; else shutdown</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td><td>Memory data read</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>Memory data write</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td><td>None; not a status cycle</td></tr> <tr><td>1 (HIGH)</td><td>0</td><td>0</td><td>0</td><td>Reserved</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td><td>I/O read</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td><td>I/O write</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>1</td><td>None; not a status cycle</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>0</td><td>Reserved</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>1</td><td>Memory instruction read</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>0</td><td>Reserved</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td><td>None; not a status cycle</td></tr> </tbody> </table> | 80286 Bus Cycle Status Definition | | | | | COD/ $\bar{I}NT\bar{A}$ | $M/\bar{I}\bar{O}$ | $S\bar{1}$ | $S\bar{0}$ | Bus cycle initiated | 0 (LOW) | 0 | 0 | 0 | Interrupt acknowledge | 0 | 0 | 0 | 1 | Reserved | 0 | 0 | 1 | 0 | Reserved | 0 | 0 | 1 | 1 | None; not a status cycle | 0 | 1 | 0 | 0 | IF A1 = 1 then halt; else shutdown | 0 | 1 | 0 | 1 | Memory data read | 0 | 1 | 1 | 0 | Memory data write | 0 | 1 | 1 | 1 | None; not a status cycle | 1 (HIGH) | 0 | 0 | 0 | Reserved | 1 | 0 | 0 | 1 | I/O read | 1 | 0 | 1 | 0 | I/O write | 1 | 0 | 1 | 1 | None; not a status cycle | 1 | 1 | 0 | 0 | Reserved | 1 | 1 | 0 | 1 | Memory instruction read | 1 | 1 | 1 | 0 | Reserved | 1 | 1 | 1 | 1 | None; not a status cycle |
| 80286 Bus Cycle Status Definition | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| COD/ $\bar{I}NT\bar{A}$ | $M/\bar{I}\bar{O}$ | $S\bar{1}$ | $S\bar{0}$ | Bus cycle initiated | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 (LOW) | 0 | 0 | 0 | Interrupt acknowledge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 0 | 1 | Reserved | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | 0 | Reserved | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | 1 | None; not a status cycle | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 0 | 0 | IF A1 = 1 then halt; else shutdown | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 0 | 1 | Memory data read | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 1 | 0 | Memory data write | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 1 | 1 | None; not a status cycle | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 (HIGH) | 0 | 0 | 0 | Reserved | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 1 | I/O read | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | I/O write | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 1 | None; not a status cycle | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 0 | Reserved | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 1 | Memory instruction read | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 1 | 0 | Reserved | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 1 | 1 | None; not a status cycle | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $M/\bar{I}\bar{O}$ | O | Memory/I/O Select distinguishes memory access from I/O access. If HIGH during T_0 , a memory cycle or a halt/shutdown cycle is in progress. If LOW, an I/O cycle or an interrupt acknowledge cycle is in progress. $M/\bar{I}\bar{O}$ floats to 3-state OFF during bus hold acknowledge. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $COD/\bar{I}NT\bar{A}$ | O | Code/Interrupt Acknowledge distinguishes instruction fetch cycles from memory data read cycles. Also distinguishes interrupt acknowledge cycles from I/O cycles. $COD/\bar{I}NT\bar{A}$ floats to 3-state OFF during bus hold acknowledge. Its timing is the same as $M/\bar{I}\bar{O}$. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LOCK | O | Bus Lock indicates that other system bus masters are not to gain control of the system bus following the current bus cycle. The LOCK signal may be activated explicitly by the "LOCK" instruction prefix or automatically by 80286 hardware during memory XCHG instructions, interrupt acknowledge, or descriptor table access. LOCK is active LOW and floats to 3-state OFF during bus hold acknowledge. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| READY | I | Bus Ready terminates a bus cycle. Bus cycles are extended without limit until terminated by READY LOW. READY is an active LOW synchronous input requiring setup and hold times relative to the system clock be met for correct operation. READY is ignored during bus hold acknowledge. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HOLD HLDA | I O | Bus Hold Request and Hold Acknowledge control ownership of the 80286 local bus. The HOLD input allows another local bus master to request control of the local bus. When control is granted, the 80286 will float its bus drivers to 3-state OFF and then activate HLDA, thus entering the bus hold acknowledge condition. The local bus will remain granted to the requesting master until HOLD becomes inactive which results in the 80286 deactivating HLDA and regaining control of the local bus. This terminates the bus hold acknowledge condition. HOLD may be asynchronous to the system clock. These signals are active HIGH. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| INTR | I | Interrupt Request requests the 80286 to suspend its current program execution and service a pending external request. Interrupt requests are masked whenever the interrupt enable bit in the flag word is cleared. When the 80286 responds to an interrupt request, it performs two interrupt acknowledge bus cycles to read an 8-bit interrupt vector that identifies the source of the interrupt. To assure program interruption, INTR must remain active until the first interrupt acknowledge cycle is completed. INTR is sampled at the beginning of each processor cycle and must be active HIGH at least two processor cycles before the current instruction ends in order to interrupt before the next instruction. INTR is level sensitive, active HIGH, and may be asynchronous to the system clock. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NMI | I | Non-maskable Interrupt Request interrupts the 80286 with an internally supplied vector value of 2. No interrupt acknowledge cycles are performed. The interrupt enable bit in the 80286 flag word does not affect this input. The NMI input is active HIGH, may be asynchronous to the system clock, and is edge triggered after internal synchronization. For proper recognition, the input must have been previously LOW for at least four system clock cycles and remain HIGH for at least four system clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Table 1. Pin Description (Cont.)

| Symbol | Type | Name and Function | | | | | | | | | | |
|------------------------------|---|---|------------------------------|--|-----------|-----------|----------|---|---------|---|-------------|-------------|
| PEREQ PEACK | I O | Processor Extension Operand Request and Acknowledge extend the memory management and protection capabilities of the 80286 to processor extensions. The PEREQ input requests the 80286 to perform a data, operand transfer for a processor extension. The PEACK output signals the processor extension when the requested operand is being transferred. PEREQ is active HIGH and floats to 3-state OFF during bus hold acknowledge. PEACK may be asynchronous to the system clock. PEACK is active LOW. | | | | | | | | | | |
| BUSY ERROR | I I | Processor Extension Busy and Error indicate the operating condition of a processor extension to the 80286. An active BUSY input stops 80286 program execution on WAIT and some ESC instructions until BUSY becomes inactive (HIGH). The 80286 may be interrupted while waiting for BUSY to become inactive. An active ERROR input causes the 80286 to perform a processor extension interrupt when executing WAIT or some ESC instructions. These inputs are active LOW and may be asynchronous to the system clock. | | | | | | | | | | |
| RESET | I | <p>System Reset clears the internal logic of the 80286 and is active HIGH. The 80286 may be re-initialized at any time with a LOW to HIGH transition on RESET which remains active for more than 16 system clock cycles. During RESET active, the output pins of the 80286 enter the state shown below:</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">80286 Pin State During Reset</th> </tr> <tr> <th>Pin Value</th> <th>Pin Names</th> </tr> </thead> <tbody> <tr> <td>1 (HIGH)</td> <td>$\overline{S0}$, $\overline{S1}$, \overline{PEACK}, A23-A0, \overline{BHE}, \overline{LOCK}</td> </tr> <tr> <td>0 (LOW)</td> <td>M$\overline{I/O}$, $\overline{COD/INTA}$, HLDA</td> </tr> <tr> <td>3-state OFF</td> <td>D$_{15-0}$</td> </tr> </tbody> </table> <p>Operation of the 80286 begins after a HIGH to LOW transition on RESET. The HIGH to LOW transition of RESET must be synchronous to the system clock. Approximately 50 system clock cycles are required by the 80286 for internal initializations before the first bus cycle to fetch code from the power-on execution address is performed.</p> <p>A LOW to HIGH transition of RESET synchronous to the system clock will end a processor cycle at the second HIGH to LOW transition of the system clock. The LOW to HIGH transition of RESET may be asynchronous to the system clock; however, in this case it cannot be predetermined which phase of the processor clock will occur during the next system clock period. Synchronous LOW to HIGH transitions of RESET are required only for systems where the processor clock must be phase synchronous to another clock.</p> | 80286 Pin State During Reset | | Pin Value | Pin Names | 1 (HIGH) | $\overline{S0}$, $\overline{S1}$, \overline{PEACK} , A23-A0, \overline{BHE} , \overline{LOCK} | 0 (LOW) | M $\overline{I/O}$, $\overline{COD/INTA}$, HLDA | 3-state OFF | D $_{15-0}$ |
| 80286 Pin State During Reset | | | | | | | | | | | | |
| Pin Value | Pin Names | | | | | | | | | | | |
| 1 (HIGH) | $\overline{S0}$, $\overline{S1}$, \overline{PEACK} , A23-A0, \overline{BHE} , \overline{LOCK} | | | | | | | | | | | |
| 0 (LOW) | M $\overline{I/O}$, $\overline{COD/INTA}$, HLDA | | | | | | | | | | | |
| 3-state OFF | D $_{15-0}$ | | | | | | | | | | | |
| V _{SS} | I | System Ground: 0 Volts. | | | | | | | | | | |
| V _{CC} | I | System Power: +5 Volt Power Supply. | | | | | | | | | | |
| CAP | I | <p>Substrate Filter Capacitor: a 0.047μf \pm 20% 12V capacitor must be connected between this pin and ground. This capacitor filters the output of the internal substrate bias generator. A maximum DC leakage current of 1 μa is allowed through the capacitor.</p> <p>For correct operation of the 80286, the substrate bias generator must charge this capacitor to its operating voltage. The capacitor chargeup time is 5 milliseconds (max.) after V_{CC} and CLK reach their specified AC and DC parameters. RESET may be applied to prevent spurious activity by the CPU during this time. After this time, the 80286 processor clock can be phase synchronized to another clock by pulsing RESET LOW synchronous to the system clock.</p> | | | | | | | | | | |

FUNCTIONAL DESCRIPTION

Introduction

The 80286 is an advanced, high-performance micro-processor with specially optimized capabilities for multiple user and multi-tasking systems. Depending on the application, the 80286's performance is up to six times faster than the standard 5 MHz 8086's, while providing complete upward software compatibility with Intel's iAPX 86, 88, and 186 family of CPU's.

The 80286 operates in two modes: iAPX 86 real address mode and protected virtual address mode. Both modes execute a superset of the iAPX 86 and 88 instruction set.

In iAPX 86 real address mode programs use real addresses with up to one megabyte of address space. Programs use virtual addresses in protected virtual address mode, also called protected mode. In protected mode, the 80286 CPU automatically maps 1 gigabyte of virtual addresses per task into a 16 megabyte real address space. This mode also provides memory protection to isolate the operating system and ensure privacy of each tasks' programs and data. Both modes provide the same base instruction set, registers, and addressing modes.

The following Functional Description describes first, the base 80286 architecture common to both modes, second, iAPX 86 real address mode, and third, protected mode.

iAPX 286/10 BASE ARCHITECTURE

The iAPX 86, 88, 186, and 286 CPU family all contain the same basic set of registers, instructions, and addressing modes. The 80286 processor is upward compatible with the 8086, 8088, and 80186 CPU's.

Register Set

The 80286 base architecture has fifteen registers as shown in Figure 3. These registers are grouped into the following four categories:

General Registers: Eight 16-bit general purpose registers used to contain arithmetic and logical operands. Four of these (AX, BX, CX, and DX) can be used either in their entirety as 16-bit words or split into pairs of separate 8-bit registers.

Segment Registers: Four 16-bit special purpose registers select, at any given time, the segments of memory that are immediately addressable for code, stack, and data. (For usage, refer to Memory Organization.)

Base and Index Registers: Four of the general purpose registers may also be used to determine offset addresses of operands in memory. These registers may contain base addresses or indexes to particular locations within a segment. The addressing mode determines the specific registers used for operand address calculations.

Status and Control Registers: The 3 16-bit special purpose registers in figure 3A record or control certain aspects of the 80286 processor state including the Instruction Pointer, which contains the offset address of the next sequential instruction to be executed.

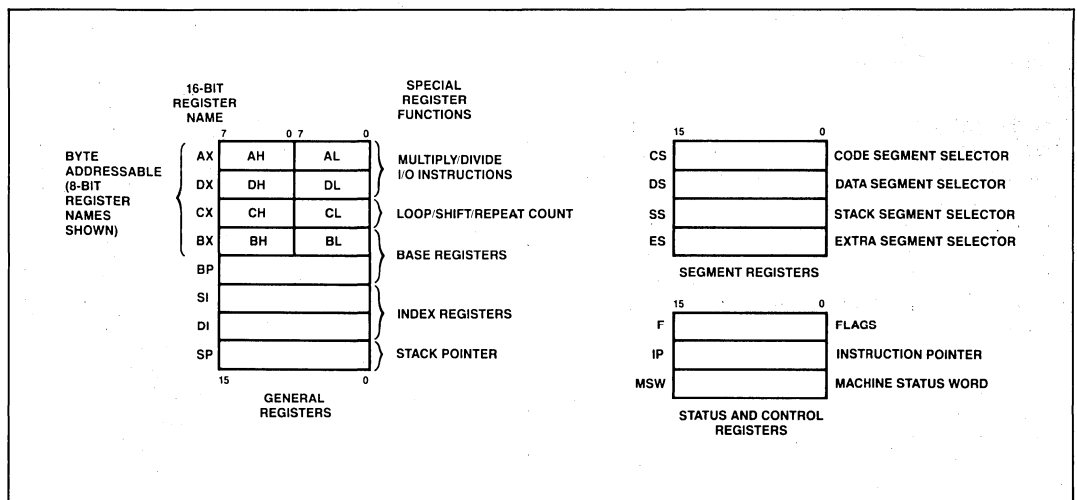


Figure 3. Register Set

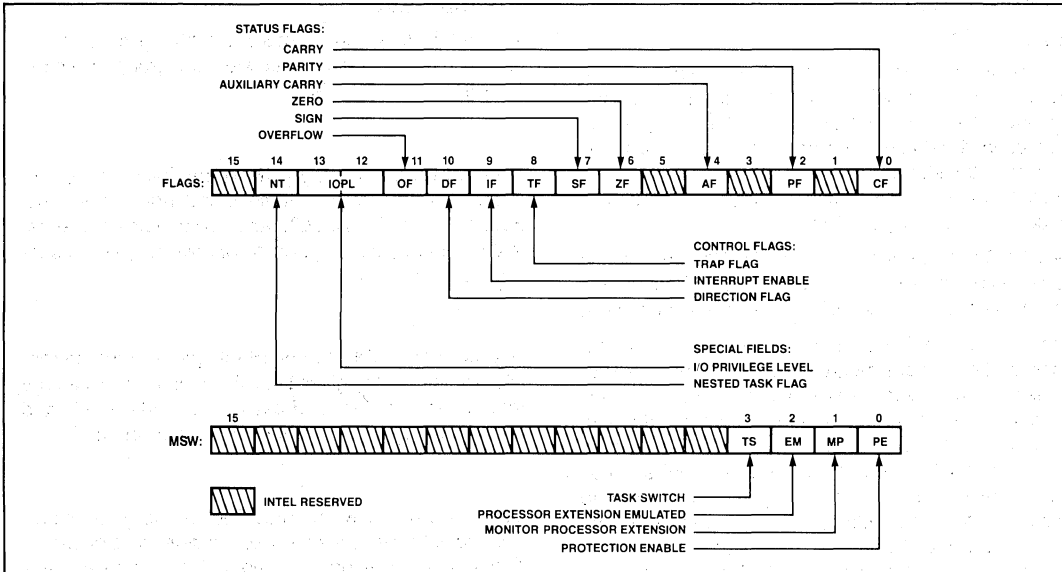


Figure 3a. Status and Control Register Bit Functions

Flags Word Description

The Flags word (Flags) records specific characteristics of the result of logical and arithmetic instructions (bits 0, 2, 4, 6, 7, and 11) and controls the operation of the 80286 within a given operating mode (bits 8 and 9). Flags is a 16-bit register. The function of the flag bits is given in Table 2.

Instruction Set

The instruction set is divided into seven categories: data transfer, arithmetic, shift/rotate/logical, string manipulation, control transfer, high level instructions, and processor control. These categories are summarized in Figure 4.

An 80286 instruction can reference zero, one, or two operands; where an operand resides in a register, in the instruction itself, or in memory. Zero-operand instructions (e.g. NOP and HLT) are usually one byte long. One-operand instructions (e.g. INC and DEC) are usually two bytes long but some are encoded in only one byte. One-operand instructions may reference a register or memory location. Two-operand instructions permit the following six types of instruction operations:

- Register to Register
- Memory to Register
- Immediate to Register
- Memory to Memory
- Register to Memory
- Immediate to Memory

Table 2. Flags Word Bit Functions

| Bit Position | Name | Function |
|--------------|------|---|
| 0 | CF | Carry Flag—Set on high-order bit carry or borrow; cleared otherwise |
| 2 | PF | Parity Flag—Set if low-order 8 bits of result contain an even number of 1-bits; cleared otherwise |
| 4 | AF | Set on carry from or borrow to the low order four bits of AL; cleared otherwise |
| 6 | ZF | Zero Flag—Set if result is zero; cleared otherwise |
| 7 | SF | Sign Flag—Set equal to high-order bit of result (0 if positive, 1 if negative) |
| 11 | OF | Overflow Flag—Set if result is a too-large positive number or a too-small negative number (excluding sign-bit) to fit in destination operand; cleared otherwise |
| 8 | TF | Single Step Flag—Once set, a single step interrupt occurs after the next instruction executes. TF is cleared by the single step interrupt. |
| 9 | IF | Interrupt-enable Flag—When set, maskable interrupts will cause the CPU to transfer control to an interrupt vector specified location. |
| 10 | DF | Direction Flag—Causes string instructions to auto decrement the appropriate index registers when set. Clearing DF causes auto increment. |

Two-operand instructions (e.g. MOV and ADD) are usually three to six bytes long. Memory to memory operations are provided by a special class of string instructions requiring one to three bytes. For detailed instruction formats and encodings refer to the instruction set summary at the end of this document.

For detailed operation and usage of each instruction, see Appendix of iAPX 286 Programmer's Reference Manual (Order No. 210498)

| GENERAL PURPOSE | |
|-----------------|------------------------------|
| MOV | Move byte or word |
| PUSH | Push word onto stack |
| POP | Pop word off stack |
| PUSHA | Push all registers on stack |
| POPA | Pop all registers from stack |
| XCHG | Exchange byte or word |
| XLAT | Translate byte |
| INPUT/OUTPUT | |
| IN | Input byte or word |
| OUT | Output byte or word |
| ADDRESS OBJECT | |
| LEA | Load effective address |
| LDS | Load pointer using DS |
| LES | Load pointer using ES |
| FLAG TRANSFER | |
| LAHF | Load AH register from flags |
| SAHF | Store AH register in flags |
| PUSHF | Push flags onto stack |
| POPF | Pop flags off stack |

Figure 4a. Data Transfer Instructions

| | |
|------------|---------------------------------|
| MOVS | Move byte or word string |
| INS | Input bytes or word string |
| OUTS | Output bytes or word string |
| CMPS | Compare byte or word string |
| SCAS | Scan byte or word string |
| LODS | Load byte or word string |
| STOS | Store byte or word string |
| REP | Repeat |
| REPE/REPZ | Repeat while equal/zero |
| REPNE/REPZ | Repeat while not equal/not zero |

Figure 4c. String Instructions

| ADDITION | |
|----------------|-----------------------------------|
| ADD | Add byte or word |
| ADC | Add byte or word with carry |
| INC | Increment byte or word by 1 |
| AAA | ASCII adjust for addition |
| DAA | Decimal adjust for addition |
| SUBTRACTION | |
| SUB | Subtract byte or word |
| SBB | Subtract byte or word with borrow |
| DEC | Decrement byte or word by 1 |
| NEG | Negate byte or word |
| CMP | Compare byte or word |
| AAS | ASCII adjust for subtraction |
| DAS | Decimal adjust for subtraction |
| MULTIPLICATION | |
| MUL | Multiply byte or word unsigned |
| IMUL | Integer multiply byte or word |
| AAM | ASCII adjust for multiply |
| DIVISION | |
| DIV | Divide byte or word unsigned |
| IDIV | Integer divide byte or word |
| AAD | ASCII adjust for division |
| CBW | Convert byte to word |
| CWD | Convert word to doubleword |

Figure 4b. Arithmetic Instructions

| LOGICALS | |
|----------|--|
| NOT | "Not" byte or word |
| AND | "And" byte or word |
| OR | "Inclusive or" byte or word |
| XOR | "Exclusive or" byte or word |
| TEST | "Test" byte or word |
| SHIFTS | |
| SHL/SAL | Shift logical/arithmetic left byte or word |
| SHR | Shift logical right byte or word |
| SAR | Shift arithmetic right byte or word |
| ROTATES | |
| ROL | Rotate left byte or word |
| ROR | Rotate right byte or word |
| RCL | Rotate through carry left byte or word |
| RCR | Rotate through carry right byte or word |

Figure 4d. Shift/Rotate/Logical Instructions

| CONDITIONAL TRANSFERS | | UNCONDITIONAL TRANSFERS | |
|-----------------------|------------------------------------|-------------------------|----------------------------|
| JA/JNBE | Jump if above/not below nor equal | CALL | Call procedure |
| JAE/JNB | Jump if above or equal/not below | RET | Return from procedure |
| JB/JNAE | Jump if below/not above nor equal | JMP | Jump |
| JBE/JNA | Jump if below or equal/not above | | |
| JC | Jump if carry | ITERATION CONTROLS | |
| JE/JZ | Jump if equal/zero | LOOP | Loop |
| JG/JNLE | Jump if greater/not less nor equal | | |
| JGE/JNL | Jump if greater or equal/not less | LOOPE/LOOPZ | Loop if equal/zero |
| JL/JNGE | Jump if less/not greater nor equal | LOOPNE/LOOPNZ | Loop if not equal/not zero |
| JLE/JNG | Jump if less or equal/not greater | JCXZ | Jump if register CX = 0 |
| JNC | Jump if not carry | INTERRUPTS | |
| JNE/JNZ | Jump if not equal/not zero | INT | Interrupt |
| JNO | Jump if not overflow | | |
| JNP/JPO | Jump if not parity/parity odd | INTO | Interrupt if overflow |
| JNS | Jump if not sign | IRET | Interrupt return |
| JO | Jump if overflow | | |
| JP/JPE | Jump if parity/parity even | | |
| JS | Jump if sign | | |

Figure 4e. Program Transfer Instructions

| FLAG OPERATIONS | |
|-------------------------------|--|
| STC | Set carry flag |
| CLC | Clear carry flag |
| CMC | Complement carry flag |
| STD | Set direction flag |
| CLD | Clear direction flag |
| STI | Set interrupt enable flag |
| CLI | Clear interrupt enable flag |
| EXTERNAL SYNCHRONIZATION | |
| HLT | Halt until interrupt or reset |
| WAIT | Wait for $\overline{\text{BUSY}}$ not active |
| ESC | Escape to extension processor |
| LOCK | Lock bus during next instruction |
| NO OPERATION | |
| NOP | No operation |
| EXECUTION ENVIRONMENT CONTROL | |
| LMSW | Load machine status word |
| SMSW | Store machine status word |

Figure 4f. Processor Control Instructions

| | |
|-------|---|
| ENTER | Format stack for procedure entry |
| LEAVE | Restore stack for procedure exit |
| BOUND | Detects values outside prescribed range |

Figure 4g. High Level Instructions

Memory Organization

Memory is organized as sets of variable length segments. Each segment is a linear contiguous sequence of up to 64K (2^{16}) 8-bit bytes. Memory is addressed using a two-component address (a pointer) that consists of a 16-bit segment selector, and a 16-bit offset. The segment selector indicates the desired segment in memory. The offset component indicates the desired byte address within the segment.

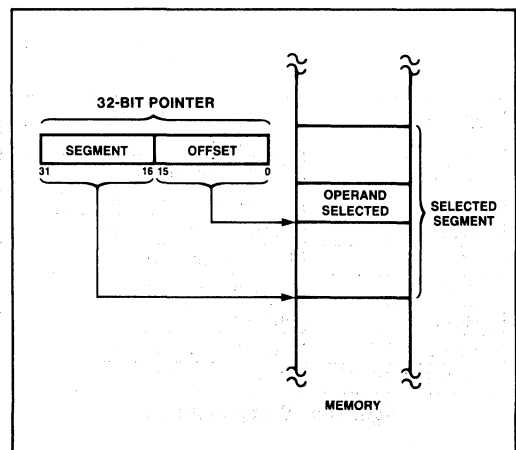


Figure 5. Two Component Address

Table 3. Segment Register Selection Rules

| Memory Reference Needed | Segment Register Used | Implicit Segment Selection Rule |
|-------------------------|-----------------------|---|
| Instructions | Code (CS) | Automatic with instruction prefetch |
| Stack | Stack (SS) | All stack pushes and pops. Any memory reference which uses BP as a base register. |
| Local Data | Data (DS) | All data references except when relative to stack or string destination |
| External (Global) Data | Extra (ES) | Alternate data segment and destination of string operation |

All instructions that address operands in memory must specify the segment and the offset. For speed and compact instruction encoding, segment selectors are usually stored in the high speed segment registers. An instruction need specify only the desired segment register and an offset in order to address a memory operand.

Most instructions need not explicitly specify which segment register is used. The correct segment register is automatically chosen according to the rules of Table 3. These rules follow the way programs are written (see Figure 6) as independent modules that require areas for code and data, a stack, and access to external data areas.

Special segment override instruction prefixes allow the implicit segment register selection rules to be overridden for special cases. The stack, data, and extra segments may coincide for simple programs. To access operands not residing in one of the four immediately available segments, a full 32-bit pointer or a new segment selector must be loaded.

Addressing Modes

The 80286 provides a total of eight addressing modes for instructions to specify operands. Two addressing modes are provided for instructions that operate on register or immediate operands:

Register Operand Mode: The operand is located in one of the 8 or 16-bit general registers.

Immediate Operand Mode. The operand is included in the instruction.

Six modes are provided to specify the location of an operand in a memory segment. A memory operand address consists of two 16-bit components: segment selector and offset. The segment selector is supplied by a segment register either implicitly chosen by the addressing mode or explicitly chosen by a segment override prefix. The offset is calculated by summing any combination of the following three address elements:

the **displacement** (an 8 or 16-bit immediate value contained in the instruction)

the **base** (contents of either the BX or BP base registers)

the **index** (contents of either the SI or DI index registers)

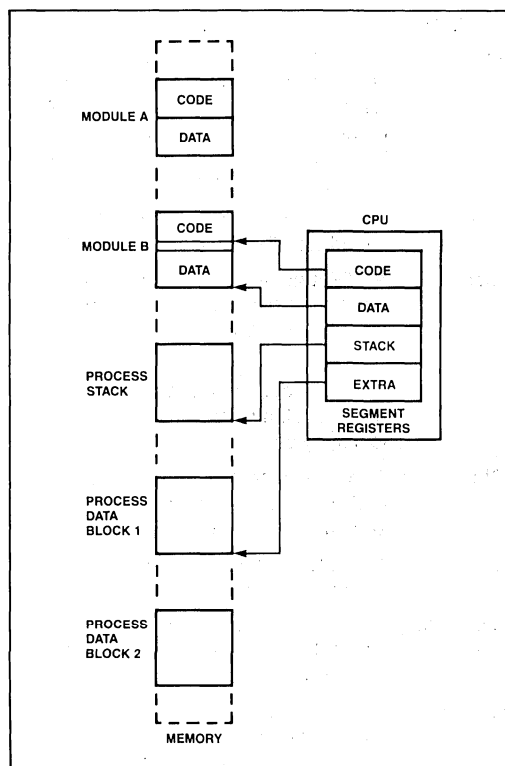


Figure 6. Segmented Memory Helps Structure Software

Any carry out from the 16-bit addition is ignored. Eight-bit displacements are sign extended to 16-bit values.

Combinations of these three address elements define the six memory addressing modes, described below.

Direct Mode: The operand's offset is contained in the instruction as an 8 or 16-bit displacement element.

Register Indirect Mode: The operand's offset is in one of the registers SI, DI, BX, or BP.

Based Mode: The operand's offset is the sum of an 8 or 16-bit displacement and the contents of a base register (BX or BP).

Indexed Mode: The operand's offset is the sum of an 8 or 16-bit displacement and the contents of an index register (SI or DI).

Based Indexed Mode: The operand's offset is the sum of the contents of a base register and an index register.

Based Indexed Mode with Displacement: The operand's offset is the sum of a base register's contents, an index register's contents, and an 8 or 16-bit displacement.

Data Types

The 80286 directly supports the following data types:

Integer: A signed binary numeric value contained in an 8-bit byte or a 16-bit word. All operations assume a 2's complement representation. Signed 32 and 64-bit integers are supported using the iAPX 286/20 Numeric Data Processor.

Ordinal: An unsigned binary numeric value contained in an 8-bit byte or 16-bit word.

Pointer: A 32-bit quantity, composed of a segment selector component and an offset component. Each component is a 16-bit word.

String: A contiguous sequence of bytes or words. A string may contain from 1 byte to 64K bytes.

ASCII: A byte representation of alphanumeric and control characters using the ASCII standard of character representation.

BCD: A byte (unpacked) representation of the decimal digits 0–9.

Packed BCD: A byte (packed) representation of two decimal digits 0–9 storing one digit in each nibble of the byte.

Floating Point: A signed 32, 64, or 80-bit real number representation. (Floating point operands are supported using the iAPX 286/20 Numeric Processor configuration.)

Figure 7 graphically represents the data types supported by the iAPX 286.

I/O Space

The I/O space consists of 64K 8-bit or 32K 16-bit ports. I/O instructions address the I/O space with either an 8-bit port address, specified in the instruction, or a 16-bit port address in the DX register. 8-bit port addresses are zero extended such that A₁₅–A₈ are LOW. I/O port addresses 00F8(H) through 00FF(H) are reserved.

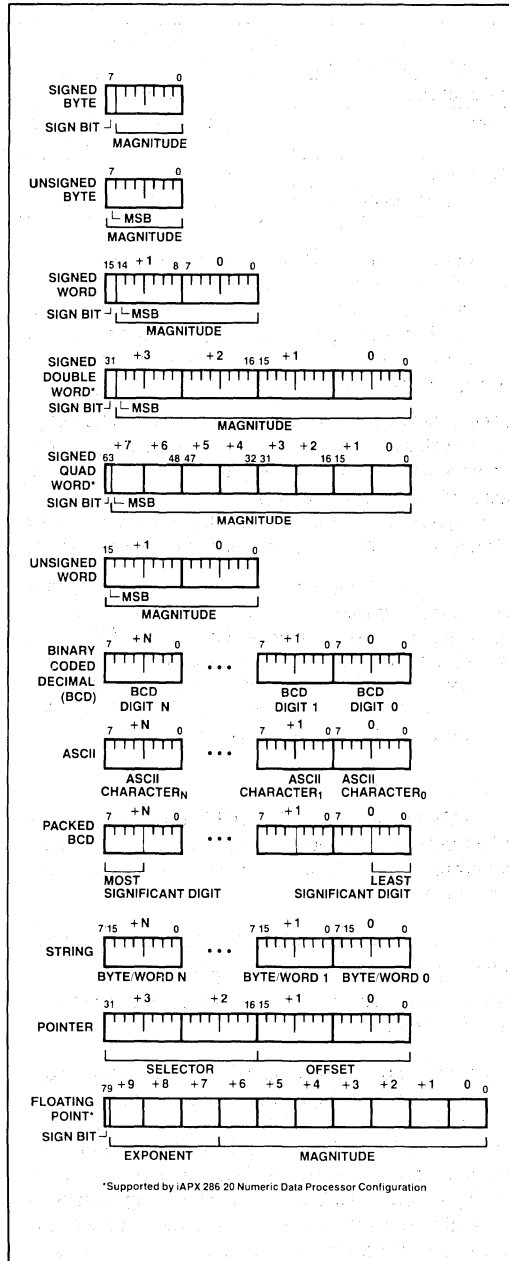


Figure 7. iAPX 286 Supported Data Types

Table 4. Interrupt Vector Assignments

| Function | Interrupt Number | Related Instructions | Does Return Address Point to Instruction Causing Exception? |
|---|------------------|----------------------|---|
| Divide error exception | 0 | DIV, IDIV | Yes |
| Single step interrupt | 1 | All | |
| NMI interrupt | 2 | INT 2 or NMI pin | |
| Breakpoint interrupt | 3 | INT 3 | |
| INTO detected overflow exception | 4 | INTO | No |
| BOUND range exceeded exception | 5 | BOUND | Yes |
| Invalid opcode exception | 6 | Any undefined opcode | Yes |
| Processor extension not available exception | 7 | ESC or WAIT | Yes |
| Intel reserved—do not use | 8–15 | | |
| Processor extension error interrupt | 16 | ESC or WAIT | |
| Intel reserved—do not use | 17–31 | | |
| User defined | 32–255 | | |

Interrupts

An interrupt transfers execution to a new program location. The old program address (CS:IP) and machine state (Flags) are saved on the stack to allow resumption of the interrupted program. Interrupts fall into three classes: hardware initiated, INT instructions, and instruction exceptions. Hardware initiated interrupts occur in response to an external input and are classified as non-maskable or maskable. Programs may cause an interrupt with an INT instruction. Instruction exceptions occur when an unusual condition, which prevents further instruction processing, is detected while attempting to execute an instruction. The return address from an exception will always point at the instruction causing the exception and include any leading instruction prefixes.

A table containing up to 256 pointers defines the proper interrupt service routine for each interrupt. Interrupts 0–31, some of which are used for instruction exceptions, are reserved. For each interrupt, an 8-bit vector must be supplied to the 80286 which identifies the appropriate table entry. Exceptions supply the interrupt vector internally. INT instructions contain or imply the vector and allow access to all 256 interrupts. Maskable hardware initiated interrupts supply the 8-bit vector to the CPU during an interrupt acknowledge bus sequence. Non-maskable hardware interrupts use a predefined internally supplied vector.

MASKABLE INTERRUPT (INTR)

The 80286 provides a maskable hardware interrupt request pin, INTR. Software enables this input by setting

the interrupt flag bit (IF) in the flag word. All 224 user-defined interrupt sources can share this input, yet they can retain separate interrupt handlers. An 8-bit vector read by the CPU during the interrupt acknowledge sequence (discussed in System Interface section) identifies the source of the interrupt.

Further maskable interrupts are disabled while servicing an interrupt by resetting the IF but as part of the response to an interrupt or exception. The saved flag word will reflect the enable status of the processor prior to the interrupt. Until the flag word is restored to the flag register, the interrupt flag will be zero unless specifically set. The interrupt return instruction includes restoring the flag word, thereby restoring the original status of IF.

NON-MASKABLE INTERRUPT REQUEST (NMI)

A non-maskable interrupt input (NMI) is also provided. NMI has higher priority than INTR. A typical use of NMI would be to activate a power failure routine. The activation of this input causes an interrupt with an internally supplied vector value of 2. No external interrupt acknowledge sequence is performed.

While executing the NMI servicing procedure, the 80286 will service neither further NMI requests, INTR requests, nor the processor extension segment overrun interrupt until an interrupt return (IRET) instruction is executed or the CPU is reset. If NMI occurs while currently servicing an NMI, its presence will be saved for servicing after executing the first IRET instruction. IF is cleared at the beginning of an NMI interrupt to inhibit INTR interrupts.

SINGLE STEP INTERRUPT

The 80286 has an internal interrupt that allows programs to execute one instruction at a time. It is called the single step interrupt and is controlled by the single step flag bit (TF) in the flag word. Once this bit is set, an internal single step interrupt will occur after the next instruction has been executed. The interrupt clears the TF bit and uses an internally supplied vector of 1. The IRET instruction is used to set the TF bit and transfer control to the next instruction to be single stepped.

Interrupt Priorities

When simultaneous interrupt requests occur, they are processed in a fixed order as shown in Table 5. Interrupt processing involves saving the flags, return address, and setting CS:IP to point at the first instruction of the interrupt handler. If other interrupts remain enabled they are processed before the first instruction of the current interrupt handler is executed. The last interrupt processed is therefore the first one serviced.

Table 5. Interrupt Processing Order

| Order | Interrupt |
|-------|-------------------------------------|
| 1 | Instruction exception |
| 2 | Single step |
| 3 | NMI |
| 4 | Processor extension segment overrun |
| 5 | INTR |
| 6 | INT instruction |

Initialization and Processor Reset

Processor initialization or start up is accomplished by driving the RESET input pin HIGH. RESET forces the 80286 to terminate all execution and local bus activity. No instruction or bus activity will occur as long as RESET is active. After RESET becomes inactive and an internal processing interval elapses, the 80286 begins execution in real address mode with the instruction at physical location FFFFFFF0(H). RESET also sets some registers to predefined values as shown as shown in Table 6.

Table 8. Recommended MSW Encodings For Processor Extension Control

| TS | MP | EM | Recommended Use | Instructions Causing Exception 7 |
|----|----|----|---|----------------------------------|
| 0 | 0 | 0 | Initial encoding after RESET. iAPX 286 operation is identical to iAPX 86,88. | None |
| 0 | 0 | 1 | No processor extension is available. Software will emulate its function. | ESC |
| 1 | 0 | 1 | No processor extension is available. Software will emulate its function. The current processor extension context may belong to another task. | ESC |
| 0 | 1 | 0 | A processor extension exists. | None |
| 1 | 1 | 0 | A processor extension exists. The current processor extension context may belong to another task. The Exception 7 on WAIT allows software to test for an error pending from a previous processor extension operation. | ESC or WAIT |

Table 6. 80286 Initial Register State after RESET

| | |
|---------------------|---------|
| Flag word | 0002(H) |
| Machine Status Word | FFF0(H) |
| Instruction pointer | FFF0(H) |
| Code segment | F000(H) |
| Data segment | 0000(H) |
| Extra segment | 0000(H) |
| Stack segment | 0000(H) |

Machine Status Word Description

The machine status word (MSW) records when a task switch takes place and controls the operating mode of the 80286. It is a 16-bit register of which the lower four bits are used. One bit places the CPU into protected mode, while the other three bits, as shown in Table 7, control the processor extension interface. After RESET, this register contains FFF0(H) which places the 80286 in iAPX 86 real address mode.

Table 7. MSW Bit Functions

| Bit Position | Name | Function |
|--------------|------|---|
| 0 | PE | Protected mode enable places the 80286 into protected mode and can not be cleared except by RESET. |
| 1 | MP | Monitor processor extension allows WAIT instructions to cause a processor extension not present exception (number 7). |
| 2 | EM | Emulate processor extension causes a processor extension not present exception (number 7) on ESC instructions to allow emulating a processor extension. |
| 3 | TS | Task switched indicates the next instruction using a processor extension will cause exception 7, allowing software to test whether the current processor extension context belongs to the current task. |

The LMSW and SMSW instructions can load and store the MSW in real address mode. The recommended use of TS, EM, and MP is shown in Table 8.

Halt

The HLT instruction stops program execution and prevents the CPU from using the local bus until restarted. Either NMI, INTR with IF = 1, or RESET will force the 80286 out of halt. If interrupted, the saved CS:IP will point to the next instruction after the HLT.

iAPX 86 REAL ADDRESS MODE

The 80286 executes a fully upward-compatible superset of the 8086 instruction set in real address mode. In real address mode the 80286 is object code compatible with 8086 and 8088 software. The real address mode architecture (registers and addressing modes) is exactly as described in the iAPX 286/10 Base Architecture section of this Functional Description.

Memory Size

Physical memory is a contiguous array of up to 1,048,576 bytes (one megabyte) addressed by pins A₀ through A₁₉ and BHE. A₂₀ through A₂₃ may be ignored.

Memory Addressing

In real address mode physical memory is a contiguous array of up to 1,048,576 bytes (one megabyte) addressed by pins A₀ through A₁₉ and BHE. A₂₀ through A₂₃ may be ignored.

The selector portion of a pointer is interpreted as the upper 16 bits of a 20-bit segment address. The lower four bits of the 20-bit segment address are always zero. Segment addresses, therefore, begin on multiples of 16 bytes. See Figure 8 for a graphic representation of address formation.

All segments in real address mode are 64K bytes in size and may be read, written, or executed. An exception or interrupt can occur if data operands or instructions attempt to wrap around the end of a segment (e.g. a word with its low order byte at offset FFFF(H) and its high order byte at offset 0000(H)). If, in real address mode, the information contained in a segment does not use the full 64K bytes, the unused end of the segment may be overlaid by another segment to reduce physical memory requirements.

Reserved Memory Locations

The 80286 reserves two fixed areas of memory in real address mode (see Figure 9); system initialization area and interrupt table area. Locations from addresses FFFF0(H) through FFFFF(H) are reserved for system initialization. Initial execution begins at location FFFF0(H). Locations 00000(H) through 003FF(H) are reserved for interrupt vectors.

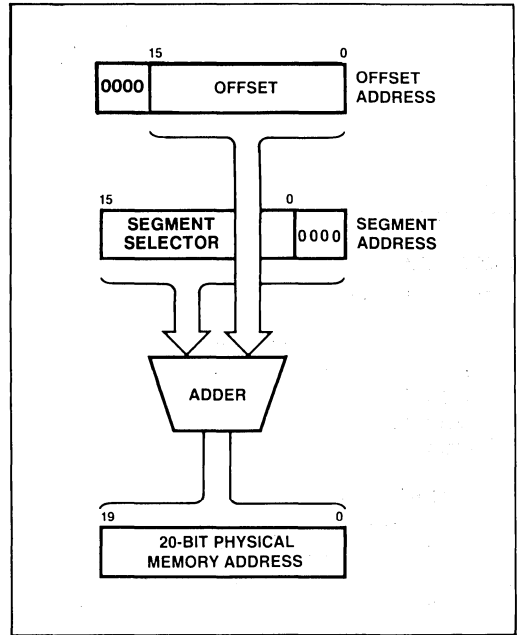


Figure 8. iAPX 86 Real Address Mode Address Calculation

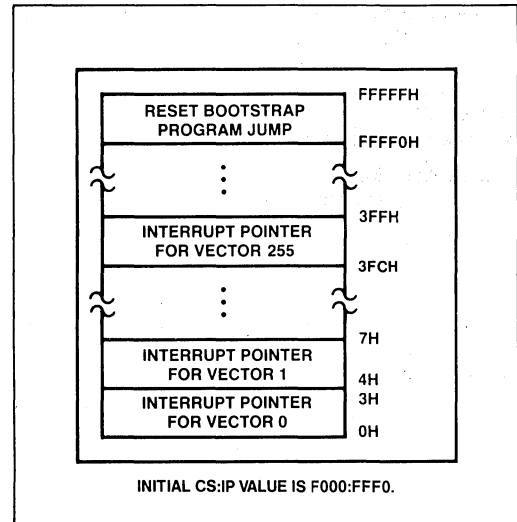


Figure 9. iAPX 86 Real Address Mode Initially Reserved Memory Locations

Table 9. Real Address Mode Addressing Interrupts

| Function | Interrupt Number | Related Instructions | Return Address Before Instruction? |
|---|------------------|--|------------------------------------|
| Interrupt table limit too small exception | 8 | INT vector is not within table limit | Yes |
| Processor extension segment overrun interrupt | 9 | ESC with memory operand extending beyond offset FFFF(H) | No |
| Segment overrun exception | 13 | Word memory reference with offset = FFFF(H) or an attempt to execute past the end of a segment | Yes |

Interrupts

Table 9 shows the interrupt vectors reserved for exceptions and interrupts which indicate an addressing error. The exceptions leave the CPU in the state existing before attempting to execute the failing instruction (except for PUSH, POP, PUSHA, or POPA). Refer to the next section on protected mode initialization for a discussion on exception 8.

Protected Mode Initialization

To prepare the 80286 for protected mode, the LIDT instruction is used to load the 24-bit interrupt table base and 16-bit limit for the protected mode interrupt table. This instruction can also set a base and limit for the interrupt vector table in real address mode. After reset, the interrupt table base is initialized to 000000(H) and its size set to 03FF(H). These values are compatible with iAPX 86, 88 software. LIDT should only be executed in preparation for protected mode.

Shutdown

Shutdown occurs when a severe error is detected that prevents further instruction processing by the CPU. Shutdown and halt are externally signalled via a halt bus operation. They can be distinguished by A₁ HIGH for halt and A₁ LOW for shutdown. In real address mode, shutdown can occur under two conditions:

- Exceptions 8 or 13 happen and the IDT limit does not include the interrupt vector.
- A CALL INT or PUSH instruction attempts to wrap around the stack segment when SP is not even.

An NMI input can bring the CPU out of shutdown if the IDT limit is at least 000F(H) and SP is greater than 0005(H), otherwise shutdown can only be exited via the RESET input.

PROTECTED VIRTUAL ADDRESS MODE

The 80286 executes a fully upward-compatible superset of the 8086 instruction set in protected virtual address mode (protected mode). Protected mode also provides memory management and protection mechanisms and associated instructions.

The 80286 enters protected virtual address mode from real address mode by setting the PE (Protection Enable) bit of the machine status word with the Load Machine Status Word (LMSW) instruction. Protected mode offers extended physical and virtual memory address space, memory protection mechanisms, and new operations to support operating systems and virtual memory.

All registers, instructions, and addressing modes described in the iAPX 286/10 Base Architecture section of this Functional Description remain the same. Programs for the iAPX 86, 88, 186, and real address mode 80286 can be run in protected mode; however, embedded constants for segment selectors are different.

Memory Size

The protected mode 80286 provides a 1 gigabyte virtual address space per task mapped into a 16 megabyte physical address space defined by the address pins A₂₃–A₀ and BHE. The virtual address space may be larger than the physical address space since any use of an address that does not map to a physical memory location will cause a restartable exception.

Memory Addressing

As in real address mode, protected mode uses 32-bit pointers, consisting of 16-bit selector and offset components. The selector, however, specifies an index into a memory resident table rather than the upper 16-bits of a real memory address. The 24-bit base address of the

desired segment is obtained from the tables in memory. The 16-bit offset is added to the segment base address to form the physical address as shown in Figure 10. The tables are automatically referenced by the CPU whenever a segment register is loaded with a selector. All iAPX 286 instructions which load a segment register will reference the memory based tables without additional software. The memory based tables contain 8 byte values called descriptors.

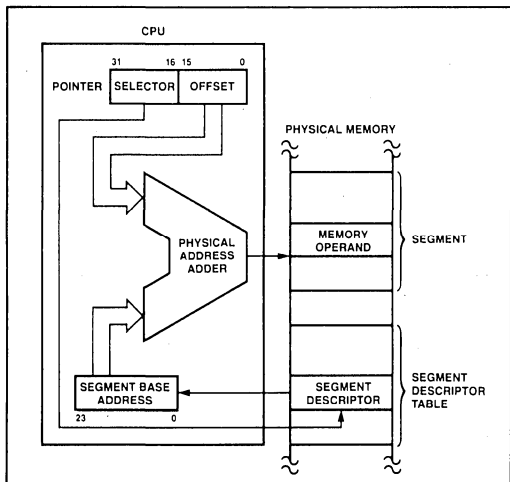


Figure 10. Protected Mode Memory Addressing


DESCRIPTORS

Descriptors define the use of memory. Special types of descriptors also define new functions for transfer of control and task switching. The 80286 has segment descriptors for code, stack and data segments, and system control descriptors for special system data segments and control transfer operations. Descriptor accesses are performed as locked bus operations to assure descriptor integrity in multi-processor systems.

CODE AND DATA SEGMENT DESCRIPTORS (S = 1)

Besides segment base addresses, code and data descriptors contain other segment attributes including segment size (1 to 64K bytes), access rights (read only, read/write, execute only, and execute/read), and presence in memory (for virtual memory systems) (See Figure 11). Any segment usage violating a segment attribute indicated by the segment descriptor will prevent the memory cycle and cause an exception or interrupt.

Code or Data Segment Descriptor

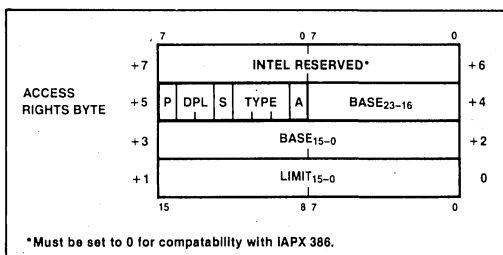

*Must be set to 0 for compatibility with IAPX 386.

Access Rights Byte Definition

| Bit Position | Name | Function |
|--------------|----------------------------------|---|
| 7 | Present (P) | P = 1 Segment is mapped into physical memory. P = 0 No mapping to physical memory exists, base and limit are not used. |
| 6-5 | Descriptor Privilege Level (DPL) | Segment privilege attribute used in privilege tests. |
| 4 | Segment Descriptor (S) | S = 1 Code or Data (includes stacks) segment descriptor S = 0 System Segment Descriptor or Gate Descriptor |
| 3 | Executable (E) | E = 0 Data segment descriptor type is: |
| 2 | Expansion Direction (ED) | ED = 0 Expand up segment, offsets must be ≤ limit. ED = 1 Expand down segment, offsets must be > limit. |
| 1 | Writeable (W) | W = 0 Data segment may not be written into. W = 1 Data segment may be written into. |
| 3 | Executable (E) | E = 1 Code Segment Descriptor type is: |
| 2 | Conforming (C) | C = 1 Code segment may only be executed when CPL ≥ DPL and CPL remains unchanged. |
| 1 | Readable (R) | R = 0 Code segment may not be read. R = 1 Code segment may be read. |
| 0 | Accessed (A) | A = 0 Segment has not been accessed. A = 1 Segment selector has been loaded into segment register or used by selector test instructions. |

Type Field Definition

If Data Segment (S = 1, E = 0)

If Code Segment (S = 1, E = 1)

Figure 11. Code and Data Segment Descriptor Formats

Code and data (including stack data) are stored in two types of segments: code segments and data segments. Both types are identified and defined by segment descriptors ($S = \bar{1}$). Code segments are identified by the executable (E) bit set to 1 in the descriptor access rights byte. The access rights byte of both code and data segment descriptors have three fields in common: present (P) bit, Descriptor Privilege Level (DPL), and accessed (A) bit. If $P = 0$, any attempted use of this segment will cause a not-present exception. DPL specifies the privilege level of the segment descriptor. DPL controls when the descriptor may be used by a task (refer to privilege discussion below). The A bit shows whether the segment has been previously accessed for usage profiling, a necessity for virtual memory systems. The CPU will always set this bit when accessing the descriptor.

Data segments ($S = 1, E = 0$) may be either read-only or read-write as controlled by the W bit of the access rights byte. Read-only ($W = 0$) data segments may not be written into. Data segments may grow in two directions, as determined by the Expansion Direction (ED) bit: upwards ($ED = 0$) for data segments, and downwards ($ED = 1$) for a segment containing a stack. The limit field for a data segment descriptor is interpreted differently depending on the ED bit (see Figure 11).


A code segment ($S = 1, E = 1$) may be execute-only or execute/read as determined by the Readable (R) bit. Code segments may never be written into and execute-only code segments ($R = 0$) may not be read. A code segment may also have an attribute called conforming (C). A conforming code segment may be shared by programs that execute at different privilege levels. The DPL of a conforming code segment defines the range of privilege levels at which the segment may be executed (refer to privilege discussion below). The limit field identifies the last byte of a code segment.

SYSTEM SEGMENT DESCRIPTORS (S = 0, TYPE = 1-3)

In addition to code and data segment descriptors, the protected mode 80286 defines System Segment Descriptors. These descriptors define special system data segments which contain a table of descriptors (Local Descriptor Table Descriptor) or segments which contain the execution state of a task (Task State Segment Descriptor).

Figure 12 gives the formats for the special system data segment descriptors. The descriptors contain a 24-bit base address of the segment and a 16-bit limit. The access byte defines the type of descriptor, its state and privilege level. The descriptor contents are valid and the segment is in physical memory if $P = 1$. If $P = 0$, the segment is not valid. The DPL field is only used in Task State Segment descriptors and indicates the privilege level at which the descriptor may be used (see Privilege). Since the Local Descriptor Table descriptor may only be used by a special privileged instruction, the DPL field is not used. Bit 4 of the access byte is 0 to indicate that it

System Segment Descriptor

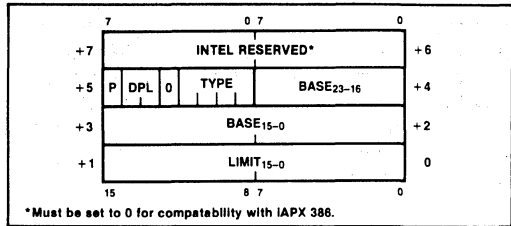

*Must be set to 0 for compatibility with IAPX 386.

System Segment Descriptor Fields

| Name | Value | Description |
|-------|---------------|--|
| TYPE | 1 | Available Task State Segment (TSS) |
| | 2 | Local Descriptor Table |
| | 3 | Busy Task State Segment (TSS) |
| P | 0 | Descriptor contents are not valid |
| | 1 | Descriptor contents are valid |
| DPL | 0-3 | Descriptor Privilege Level |
| BASE | 24-bit number | Base Address of special system data segment in real memory |
| LIMIT | 16-bit number | Offset of last byte in segment |

Figure 12. System Segment Descriptor Format

is a system control descriptor. The type field specifies the descriptor type as indicated in Figure 12.


GATE DESCRIPTORS (S = 0, TYPE = 4-7)

Gates are used to control access to entry points within the target code segment. The gate descriptors are call gates, task gates, interrupt gates and trap gates. Gates provide a level of indirection between the source and destination of the control transfer. This indirection allows the CPU to automatically perform protection checks and control entry point of the destination. Call gates are used to change privilege levels (see Privilege), task gates are used to perform a task switch, and interrupt and trap gates are used to specify interrupt service routines. The interrupt gate disables interrupts (resets IF) while the trap gate does not.

Figure 13 shows the format of the gate descriptors. The descriptor contains a destination pointer that points to the descriptor of the target segment and the entry point offset. The destination selector in an interrupt gate, trap gate, and call gate must refer to a code segment descriptor. These gate descriptors contain the entry point to prevent a program from constructing and using an illegal entry point. Task gates may only refer to a task state segment. Since task gates invoke a task switch, the destination offset is not used in the task gate.

Exception 13 is generated when the gate is used if a destination selector does not refer to the correct de-

Gate Descriptor

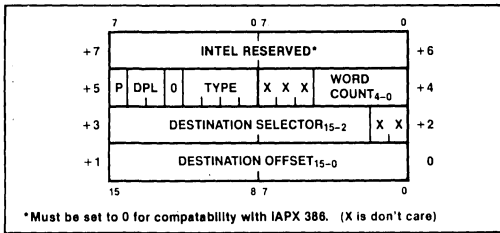

Gate Descriptor Fields

| Name | Value | Description |
|----------------------|-----------------|---|
| TYPE | 4 | -Call Gate |
| | 5 | -Task Gate |
| | 6 | -Interrupt Gate |
| | 7 | -Trap Gate |
| P | 0 | -Descriptor Contents are not valid |
| | 1 | -Descriptor Contents are valid |
| DPL | 0-3 | Descriptor Privilege Level |
| WORD COUNT | 0-31 | Number of words to copy from callers stack to called procedures stack. Only used with call gate. |
| DESTINATION SELECTOR | 16-bit selector | Selector to the target code segment (Call, Interrupt or Trap Gate) Selector to the target task state segment (Task Gate) |
| DESTINATION OFFSET | 16-bit offset | Entry point within the target code segment |

Figure 13. Gate Descriptor Format

scriptor type. The word count field is used in the call gate descriptor to indicate the number of parameters (0-31 words) to be automatically copied from the caller's stack to the stack of the called routine when a control transfer changes privilege levels. The word count field is not used by any other gate descriptor.

The access byte format is the same for all gate descriptors. P = 1 indicates that the gate contents are valid. P = 0 indicates the contents are not valid and causes ex-

ception 11 if referenced. DPL is the descriptor privilege level and specifies when this descriptor may be used by a task (refer to privilege discussion below). Bit 4 must equal 0 to indicate a system control descriptor. The type field specifies the descriptor type as indicated in Figure 13.

SEGMENT DESCRIPTOR CACHE REGISTERS

A segment descriptor cache register is assigned to each of the four segment registers (CS, SS, DS, ES). Segment descriptors are automatically loaded (cached) into a segment descriptor cache register (Figure 14) whenever the associated segment register is loaded with a selector. Only segment descriptors may be loaded into segment descriptor cache registers. Once loaded, all references to that segment of memory use the cached descriptor information instead of reaccessing the descriptor. The descriptor cache registers are not visible to programs. No instructions exist to store their contents. They only change when a segment register is loaded.

SELECTOR FIELDS

A protected mode selector has three fields: descriptor entry index, local or global descriptor table indicator (TI), and selector privilege (RPL) as shown in Figure 15. These fields select one of two memory based tables of descriptors, select the appropriate table entry and allow high-speed testing of the selector's privilege attribute (refer to privilege discussion below).

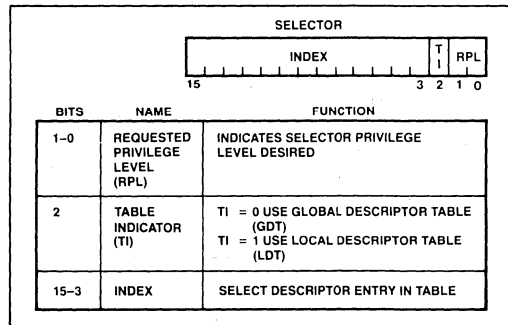


Figure 15. Selector Fields

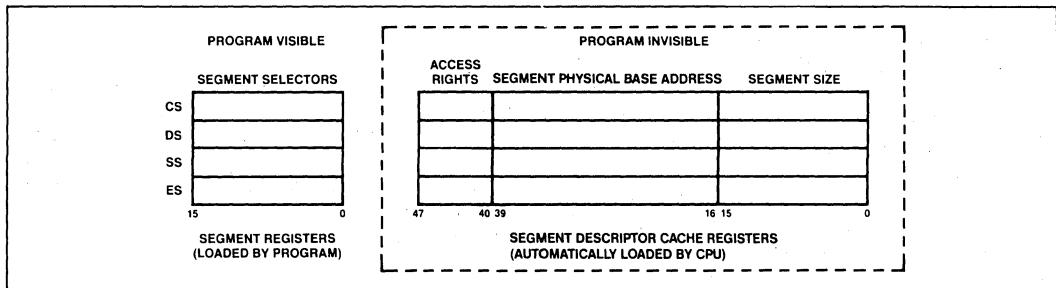


Figure 14. Descriptor Cache Registers

LOCAL AND GLOBAL DESCRIPTOR TABLES

Two tables of descriptors, called descriptor tables, contain all descriptors accessible by a task at any given time. A descriptor table is a linear array of up to 8192 descriptors. The upper 13 bits of the selector value are an index into a descriptor table. Each table has a 24-bit base register to locate the descriptor table in physical memory and a 16-bit limit register that confine descriptor access to the defined limits of the table as shown in Figure 16. A restartable exception (13) will occur if an attempt is made to reference a descriptor outside the table limits.

One table, called the Global Descriptor Table (GDT), contains descriptors available to all tasks. The other table, called the Local Descriptor Table (LDT), contains descriptors that can be private to a task. Each task may have its own private LDT. The GDT may contain all descriptor types except interrupt and trap descriptors. The LDT may contain only segment, task gate, and call gate descriptors. A segment cannot be accessed by a task if its segment descriptor does not exist in either descriptor table at the time of access.

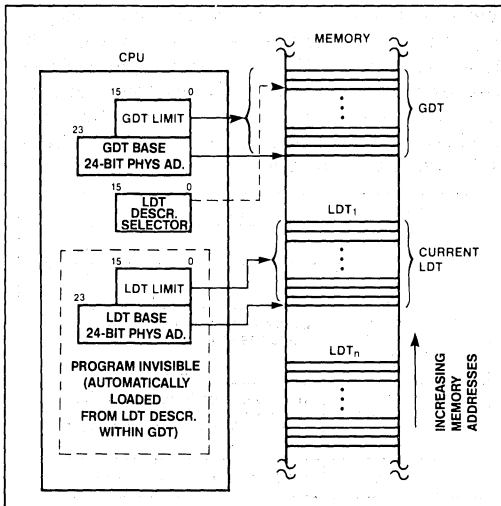


Figure 16. Local and Global Descriptor Table Definition

The LGDT and LLDT instructions load the base and limit of the global and local descriptor tables. LGDT and LLDT are privileged, i.e. they may only be executed by trusted programs operating at level 0. The LGDT instruction loads a six byte field containing the 16-bit table limit and 24-bit physical base address of the Global Descriptor Table as shown in Figure 17. The LDT instruction loads a selector which refers to a Local Descriptor Table descriptor containing the base address and limit for an LDT, as shown in Figure 12.

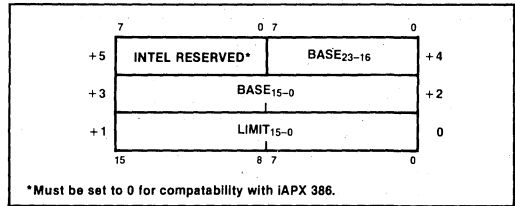


Figure 17. Global Descriptor Table and Interrupt Descriptor Table Data Type

INTERRUPT DESCRIPTOR TABLE

The protected mode 80286 has a third descriptor table, called the Interrupt Descriptor Table (IDT) (see Figure 18), used to define up to 256 interrupts. It may contain only task gates, interrupt gates and trap gates. The IDT (Interrupt Descriptor Table) has a 24-bit physical base and 16-bit limit register in the CPU. The privileged LIDT instruction loads these registers with a six byte value of identical form to that of the LGDT instruction (see Figure 17 and Protected Mode Initialization).

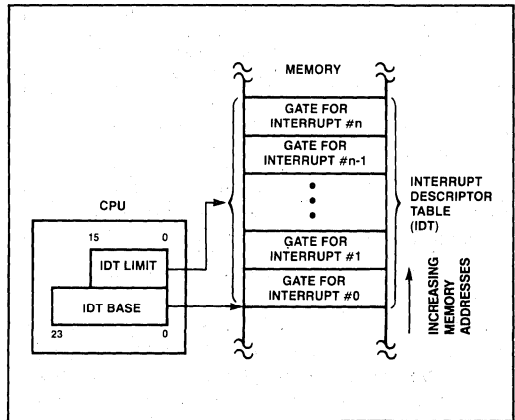


Figure 18. Interrupt Descriptor Table Definition

References to IDT entries are made via INT instructions, external interrupt vectors, or exceptions. The IDT must be at least 256 bytes in size to allocate space for all reserved interrupts.

Privilege

The 80286 has a four-level hierarchical privilege system which controls the use of privileged instructions and access to descriptors (and their associated segments) within a task. Four-level privilege, as shown in Figure 19, is an extension of the user/supervisor mode commonly found in minicomputers. The privilege levels are numbered 0 through 3. Level 0 is the most privileged level. Privilege

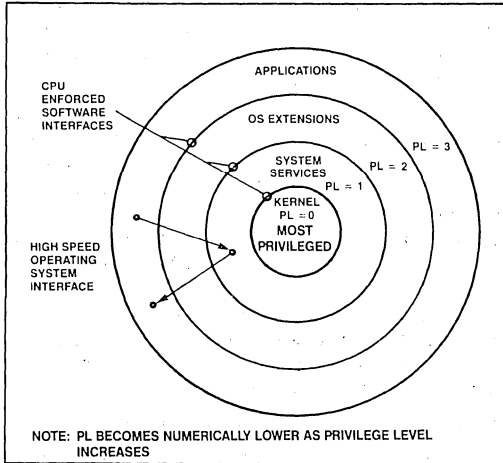


Figure 19. Hierarchical Privilege Levels

levels provide protection within a task. (Tasks are isolated by providing private LDT's for each task.) Operating system routines, interrupt handlers, and other system software can be included and protected within the virtual address space of each task using the four levels of privilege. Each task in the system has a separate stack for each of its privilege levels.

Tasks, descriptors, and selectors have a privilege level attribute that determines whether the descriptor may be used. Task privilege effects the use of instructions and descriptors. Descriptor and selector privilege only effect access to the descriptor.

TASK PRIVILEGE

A task always executes at one of the four privilege levels. The task privilege level at any specific instant is called the Current Privilege Level (CPL) and is defined by the lower two bits of the CS register. CPL cannot change during execution in a single code segment. A task's CPL may only be changed by control transfers through gate descriptors to a new code segment (See Control Transfer). Tasks begin executing at the CPL value specified by the code segment selector within TSS when the task is initiated via a task switch operation (See Figure 20). A task executing at Level 0 can access all data segments defined in the GDT and the task's LDT and is considered the most trusted level. A task executing a Level 3 has the most restricted access to data and is considered the least trusted level.

DESCRIPTOR PRIVILEGE

Descriptor privilege is specified by the Descriptor Privi-

lege Level (DPL) field of the descriptor access byte. DPL specifies the least trusted task privilege level (CPL) at which a task may access the descriptor. Descriptors with DPL = 0 are the most protected. Only tasks executing at privilege level 0 (CPL = 0) may access them. Descriptors with DPL = 3 are the least protected (i.e. have the least restricted access) since tasks can access them when CPL = 0, 1, 2, or 3. This rule applies to all descriptors, except LDT descriptors.

SELECTOR PRIVILEGE

Selector privilege is specified by the Requested Privilege Level (RPL) field in the least significant two bits of a selector. Selector RPL may establish a less trusted privilege level than the current privilege level for the use of a selector. This level is called the task's effective privilege level (EPL). RPL can only reduce the scope of a task's access to data with this selector. A task's effective privilege is the numeric maximum of RPL and CPL. A selector with RPL = 0 imposes no additional restriction on its use while a selector with RPL = 3 can only refer to segments at privilege Level 3 regardless of the task's CPL. RPL is generally used to verify that pointer parameters passed to a more trusted procedure are not allowed to use data at a more privileged level than the caller (refer to pointer testing instructions).

Descriptor Access and Privilege Validation

Determining the ability of a task to access a segment involves the type of segment to be accessed, the instruction used, the type of descriptor used and CPL, RPL, and DPL. The two basic types of segment accesses are control transfer (selectors loaded into CS) and data (selectors loaded into DS, ES or SS).

DATA SEGMENT ACCESS

Instructions that load selectors into DS and ES must refer to a data segment descriptor or readable code segment descriptor. The CPL of the task and the RPL of the selector must be the same as or more privileged (numerically equal to or lower than) than the descriptor DPL. In general, a task can only access data segments at the same or less privileged levels than the CPL or RPL (whichever is numerically higher) to prevent a program from accessing data it cannot be trusted to use.

An exception to the rule is a readable conforming code segment. This type of code segment can be read from any privilege level.

If the privilege checks fail (e.g. DPL is numerically less than the maximum of CPL and RPL) or an incorrect type of descriptor is referenced (e.g. gate descriptor or execute only code segment) exception 13 occurs. If the segment is not present, exception 11 is generated.

Instructions that load selectors into SS must refer to data segment descriptors for writable data segments. The descriptor privilege (DPL) and RPL must equal CPL. All other descriptor types or a privilege level violation will cause exception 13. A not present fault causes exception 12.

CONTROL TRANSFER

Four types of control transfer can occur when a selector is loaded into CS by a control transfer operation (see Table 10). Each transfer type can only occur if the operation which loaded the selector references the correct descriptor type. Any violation of these descriptor usage rules (e.g. JMP through a call gate or RET to a Task State Segment) will cause exception 13.

The ability to reference a descriptor for control transfer is also subject to rules of privilege. A CALL or JUMP instruction may only reference a code segment descriptor with DPL equal to the task CPL or a conforming segment with DPL of equal or greater privilege than CPL. The RPL of the selector used to reference the code descriptor must have as much privilege as CPL.

RET and IRET instructions may only reference code segment descriptors with descriptor privilege equal to or less privileged than the task CPL. The selector loaded into CS is the return address from the stack. After the return, the selector RPL is the task's new CPL. If CPL changes, the old stack pointer is popped after the return address.

When a JMP or CALL references a Task State Segment descriptor, the descriptor DPL must be the same or less privileged than the task's CPL. Reference to a valid Task

State Segment descriptor causes a task switch (see Task Switch Operation). Reference to a Task State Segment descriptor at a more privileged level than the task's CPL generates exception 13.

When an instruction or interrupt references a gate descriptor, the gate DPL must have the same or less privilege than the task CPL. If DPL is at a more privileged level than CPL, exception 13 occurs. If the destination selector contained in the gate references a code segment descriptor, the code segment descriptor DPL must be the same or more privileged than the task CPL. If not, Exception 13 is issued. After the control transfer, the code segment descriptors DPL is the task's new CPL. If the destination selector in the gate references a task state segment, a task switch is automatically performed (see Task Switch Operation).

The privilege rules on control transfer require:

- JMP or CALL direct to a code segment (code segment descriptor) can only be to a conforming segment with DPL of equal or greater privilege than CPL or a non-conforming segment at the same privilege level.
- interrupts within the task or calls that may change privilege levels, can only transfer control through a gate at the same or a less privileged level than CPL to a code segment at the same or more privileged level than CPL.
- return instructions that don't switch tasks can only return control to a code segment at the same or less privileged level.
- task switch can be performed by a call, jump or interrupt which references either a task gate or task state segment at the same or less privileged level.

Table 10. Descriptor Types Used for Control Transfer

| Control Transfer Types | Operation Types | Descriptor Referenced | Descriptor Table |
|--|--|------------------------|------------------|
| Intersegment within the same privilege level | JMP, CALL, RET, IRET* | Code Segment | GDT/LDT |
| Intersegment to the same or higher privilege level Interrupt within task may change CPL. | CALL | Call Gate | GDT/LDT |
| | Interrupt Instruction, Exception, External Interrupt | Trap or Interrupt Gate | IDT |
| Intersegment to a lower privilege level (changes task CPL) | RET, IRET* | Code Segment | GDT/LDT |
| Task Switch | CALL, JMP | Task State Segment | GDT |
| | CALL, JMP | Task Gate | GDT/LDT |
| | IRET** Interrupt Instruction, Exception, External Interrupt | Task Gate | IDT |

*NT (Nested Task bit of flag word) = 0

**NT (Nested Task bit of flag word) = 1

PRIVILEGE LEVEL CHANGES

Any control transfer that changes CPL within the task, causes a change of stacks as part of the operation. Initial values of SS:SP for privilege levels 0, 1, and 2 are kept in the task state segment (refer to Task Switch Operation). During a JMP or CALL control transfer, the new stack pointer is loaded into the SS and SP registers and the previous stack pointer is pushed onto the new stack.

When returning to the original privilege level, its stack is restored as part of the RET or IRET instruction operation. For subroutine calls that pass parameters on the stack and cross privilege levels, a fixed number of words, as specified in the gate, are copied from the previous stack to the current stack. The inter-segment RET instruction with a stack adjustment value will correctly restore the previous stack pointer upon return.

Protection

The 80286 includes mechanisms to protect critical instructions that affect the CPU execution state (e.g. HLT) and code or data segments from improper usage. These protection mechanisms are grouped into three forms:

Restricted usage of segments (e.g. no write allowed to read-only data segments). The only segments available for use are defined by descriptors in the Local Descriptor Table (LDT) and Global Descriptor Table (GDT).

Restricted access to segments via the rules of privilege and descriptor usage.

Privileged instructions or operations that may only be executed at certain privilege levels as determined by the CPL and I/O Privilege Level (IOPL). The IOPL is defined by bits 14 and 13 of the flag word.

These checks are performed for all instructions and can be split into three categories: segment load checks (Table 11), operand reference checks (Table 12), and privileged instruction checks (Table 13). Any violation of the rules shown will result in an exception. A not-present exception related to the stack segment causes exception 12.

The IRET and POPF instructions do not perform some of their defined functions if CPL is not of sufficient privilege (numerically small enough). Precisely these are:

- The IF bit is not changed if $CPL > IOPL$.
- The IOPL field of the flag word is not changed if $CPL > 0$.

No exceptions or other indication are given when these conditions occur.

**Table 11
Segment Register Load Checks**

| Error Description | Exception Number |
|---|------------------|
| Descriptor table limit exceeded | 13 |
| Segment descriptor not-present | 11 or 12 |
| Privilege rules violated | 13 |
| Invalid descriptor/segment type segment register load: —Read only data segment load to SS —Special control descriptor load to DS, ES, SS —Execute only segment load to DS, ES, SS —Data segment load to CS —Read/Execute code segment load to SS | 13 |

Table 12 Operand Reference Checks

| Error Description | Exception Number |
|-------------------------------------|------------------|
| Write into code segment | 13 |
| Read from execute-only code segment | 13 |
| Write to read-only data segment | 13 |
| Segment limit exceeded ¹ | 12 or 13 |

Note 1: Carry out in offset calculations is ignored.

Table 13. Privileged Instruction Checks

| Error Description | Exception Number |
|--|------------------|
| $CPL \neq 0$ when executing the following instructions: LIDT, LLDT, LGDT, LTR, LMSW, CTS, HLT | 13 |
| $CPL > IOPL$ when executing the following instructions: INS, IN, OUTS, OUT, STI, CLI, LOCK | 13 |

EXCEPTIONS

The 80286 detects several types of exceptions and interrupts, in protected mode (see Table 14). Most are restartable after the exceptional condition is removed. Interrupt handlers for most exceptions can read an error code, pushed on the stack after the return address, that identifies the selector involved (0 if none). The return address normally points to the failing instruction, including all leading prefixes. For a processor extension segment overrun exception, the return address will not point at the ESC instruction that caused the exception; however, the processor extension registers may contain the address of the failing instruction.

Table 14. Protected Mode Exceptions

| Interrupt Vector | Function | Return Address At Failing Instruction? | Always Restartable? | Error Code on Stack? |
|------------------|--|--|---------------------|----------------------|
| 8 | Double exception detected | Yes | No ² | Yes |
| 9 | Processor extension segment overrun | No | No ² | No |
| 10 | Invalid task state segment | Yes | Yes | Yes |
| 11 | Segment not present | Yes | Yes | Yes |
| 12 | Stack segment overrun or stack segment not present | Yes | Yes ¹ | Yes |
| 13 | General protection | Yes | No ² | Yes |

NOTE 1: When a PUSH or POPA instruction attempts to wrap around the stack segment, the machine state after the exception will not be restartable because stack segment wrap around is not permitted. This condition is identified by the value of the saved SP being either 0000(H), 0001(H), FFFE(H), or FFFF(H).

NOTE 2: These exceptions indicate a violation to privilege rules or usage rules has occurred. Restart is generally not attempted under those conditions.

These exceptions indicate a violation to privilege rules or usage rules has occurred. Restart is generally not attempted under those conditions.

All these checks are performed for all instructions and can be split into three categories: segment load checks (Table 11), operand reference checks (Table 12), and privileged instruction checks (Table 13). Any violation of the rules shown will result in an exception. A not-present exception causes exception 11 or 12 and is restartable.

Special Operations

TASK SWITCH OPERATION

The 80286 provides a built-in task switch operation which saves the entire 80286 execution state (registers, address space, and a link to the previous task), loads a new execution state, and commences execution in the new task. Like gates, the task switch operation is invoked by executing an inter-segment JMP or CALL instruction which refers to a Task State Segment (TSS) or task gate descriptor in the GDT or LDT. An INT n instruction, exception, or external interrupt may also invoke the task switch operation by selecting a task gate descriptor in the associated IDT descriptor entry.

The TSS descriptor points at a segment (see Figure 20) containing the entire 80286 execution state while a task gate descriptor contains a TSS selector. The limit field of the descriptor must be >002B(H).

Each task must have a TSS associated with it. The current TSS is identified by a special register in the 80286 called the Task Register (TR). This register contains a selector referring to the task state segment descriptor that defines the current TSS. A hidden base and limit register associated with TR are loaded whenever TR is loaded with a new selector.

The IRET instruction is used to return control to the task that called the current task or was interrupted. Bit 14 in the flag register is called the Nested Task (NT) bit. It controls the function of the IRET instruction. If NT = 0, the IRET instruction performs the regular current task return by popping values off the stack; when

NT = 1, IRET performs a task switch operation back to the previous task.

When a CALL, JMP, or INT instruction initiates a task switch, the old and new TSS will be marked busy and the back link field of the new TSS set to the old TSS selector. The NT bit of the new task is set by CALL or INT initiated task switches. An interrupt that does not cause a task switch will clear NT. NT may also be set or cleared by POPF or IRET instructions.

The task state segment is marked busy by changing the descriptor type field from Type 1 to Type 3. Use of a selector that references a busy task state segment causes Exception 13.

PROCESSOR EXTENSION CONTEXT SWITCHING

The context of a processor extension (such as the 80287 numerics processor) is not changed by the task switch operation. A processor extension context need only be changed when a different task attempts to use the processor extension (which still contains the context of a previous task). The 80286 detects the first use of a processor extension after a task switch by causing the processor extension not present exception (7). The interrupt handler may then decide whether a context change is necessary.

Whenever the 80286 switches tasks, it sets the Task Switched (TS) bit of the MSW. TS indicates that a processor extension context may belong to a different task than the current one. The processor extension not present exception (7) will occur when attempting to execute an ESC or WAIT instruction if TS = 1 and a processor extension is present (MP = 1 in MSW).

POINTER TESTING INSTRUCTIONS

The iAPX 286 provides several instructions to speed pointer testing and consistency checks for maintaining system integrity (see Table 15). These instructions use the memory management hardware to verify that a selector value refers to an appropriate segment without risking an exception. A condition flag (ZF) indicates whether use of the selector or segment will cause an exception.

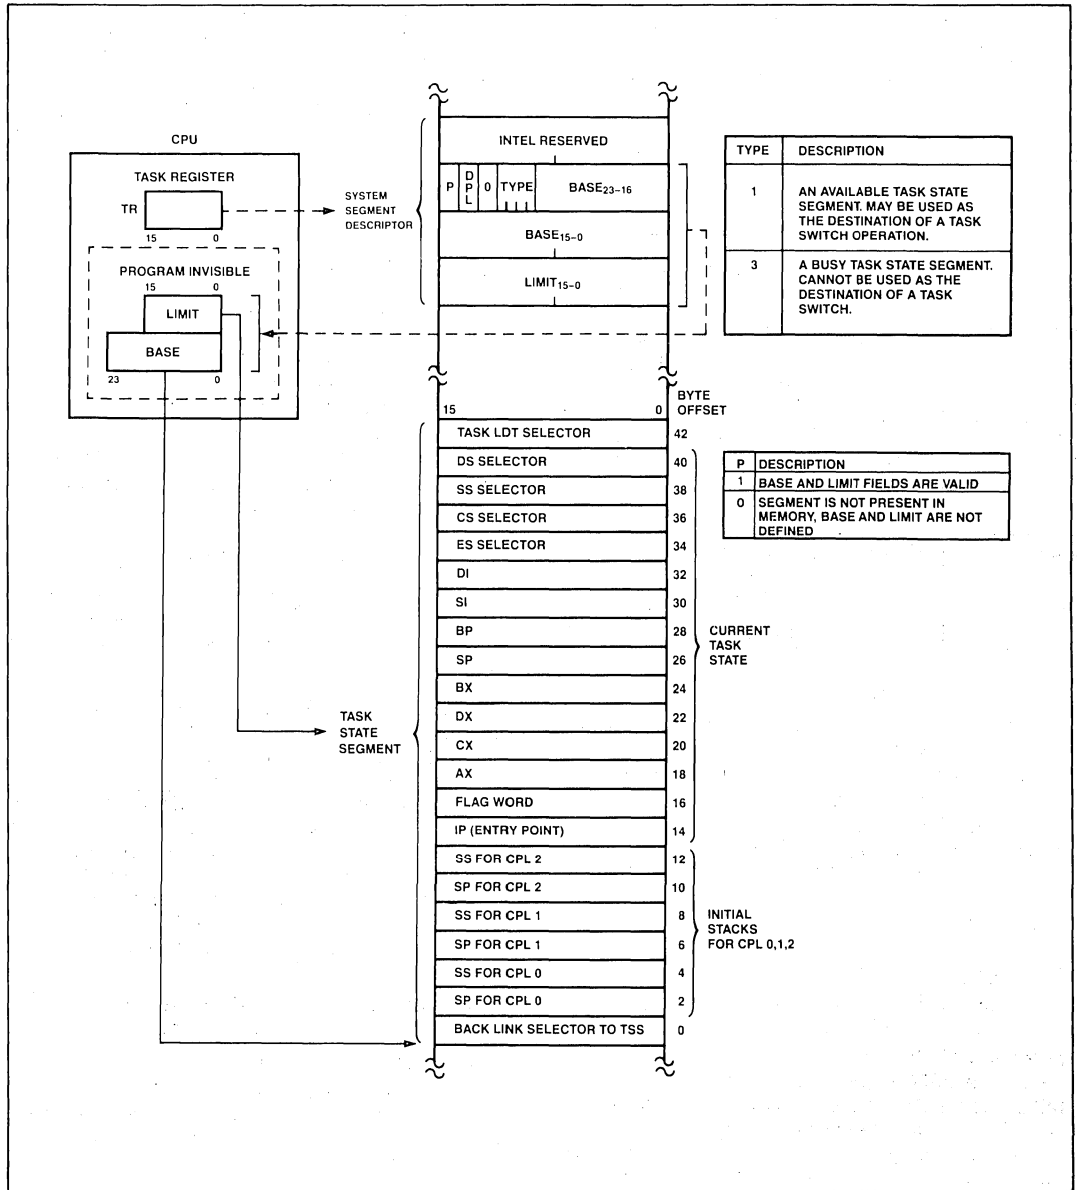


Figure 20. Task State Segment and TSS Registers

Table 15. 80286 Pointer Test Instructions

| Instruction | Operands | Function |
|-------------|--------------------|--|
| ARPL | Selector, Register | Adjust Requested Privilege Level: adjusts the RPL of the selector to the numeric maximum of current selector RPL value and the RPL value in the register. Set zero flag if selector RPL was changed by ARPL. |
| VERR | Selector | VERify for Read: sets the zero flag if the segment referred to by the selector can be read. |
| VERW | Selector | VERify for Write: sets the zero flag if the segment referred to by the selector can be written. |
| LSL | Register, Selector | Load Segment Limit: reads the segment limit into the register if privilege rules and descriptor type allow. Set zero flag if successful. |
| LAR | Register, Selector | Load Access Rights: reads the descriptor access rights byte into the register if privilege rules allow. Set zero flag if successful. |

DOUBLE FAULT AND SHUTDOWN

If two separate exceptions are detected during a single instruction execution, the 80286 performs the double fault exception (8). If an exception occurs during processing of the double fault exception, the 80286 will enter shutdown. During shutdown no further instructions or exceptions are processed. Either NMI (CPU remains in protected mode) or RESET (CPU exits protected mode) can force the 80286 out of shutdown. Shutdown is externally signalled via a HALT bus operation with A₁ HIGH.

PROTECTED MODE INITIALIZATION

The 80286 initially executes in real address mode after RESET. To allow initialization code to be placed at the top of physical memory, A₂₃₋₂₀ will be HIGH when the 80286 performs memory references relative to the CS register until CS is changed. A₂₃₋₂₀ will be zero for references to the DS, ES, or SS segments. Changing CS in real address mode will force A₂₃₋₂₀ LOW whenever CS is used again. The initial CS:IP value of F000:FFF0 provides 64K bytes of code space for initialization code without changing CS.

Protected mode operation requires several registers to be initialized. The GDT and IDT base registers must refer to a valid GDT and IDT. After executing the LMSW instruction to set PE, the 80286 must immediately execute an intra-segment JMP instruction to clear the instruction queue of instructions decoded in real address mode.

To force the 80286 CPU registers to match the initial protected mode state assumed by software, execute a JMP instruction with a selector referring to the initial TSS used in the system. This will load the task register, local descriptor table register, segment registers and initial general register state. The TR should point at a valid TSS since any task switch operation involves saving the current task state.

SYSTEM INTERFACE

The 80286 system interface appears in two forms: a local bus and a system bus. The local bus consists of address, data, status, and control signals at the pins of the CPU. A system bus is any buffered version of the local bus. A system bus may also differ from the local bus in terms of coding of status and control lines and/or timing and loading of signals. The iAPX 286 family includes several devices to generate standard system buses such as the IEEE 796 standard Multibus™.

Bus Interface Signals and Timing

The iAPX 286 microsystem local bus interfaces the 80286 to local memory and I/O components. The interface has 24 address lines, 16 data lines, and 8 status and control signals.

The 80286 CPU, 82284 clock generator, 82288 bus controller, 82289 bus arbiter, 8286/7 transceivers, and 8282/3 latches provide a buffered and decoded system bus interface. The 82284 generates the system clock and synchronizes READY and RESET. The 82288 converts bus operation status encoded by the 80286 into command and bus control signals. The 82289 bus arbiter generates Multibus bus arbitration signals. These components can provide the timing and electrical power drive levels required for most system bus interfaces including the Multibus.

Physical Memory and I/O Interface

A maximum of 16 megabytes of physical memory can be addressed in protected mode. One megabyte can be addressed in real address mode. Memory is accessible as bytes or words. Words consist of any two consecutive bytes addressed with the least significant byte stored in the lowest address.

Byte transfers occur on either half of the 16-bit local data bus. Even bytes are accessed over D₇₋₀ while odd bytes are transferred over D₁₅₋₈. Even-addressed words are transferred over D₁₅₋₀ in one bus cycle, while odd-addressed words require two bus operations. The first transfers data on D₁₅₋₈, and the second transfers data on D₇₋₀. Both byte data transfers occur automatically, transparent to software.

Two bus signals, A₀ and BHE, control transfers over the lower and upper halves of the data bus. Even address

byte transfers are indicated by **A₀** LOW and **BHE** HIGH. Odd address byte transfers are indicated by **A₀** HIGH and **BHE** LOW. Both **A₀** and **BHE** are LOW for even address word transfers.

The I/O address space contains 64K addresses in both modes. The I/O space is accessible as either bytes or words, as is memory. Byte wide peripheral devices may be attached to either the upper or lower byte of the data bus. Byte-wide I/O devices attached to the upper data byte (D₁₅₋₈) are accessed with odd I/O addresses. Devices on the lower data byte are accessed with even I/O addresses. An interrupt controller such as Intel's 8259A must be connected to the lower data byte (D₇₋₀) for proper return of the interrupt vector.

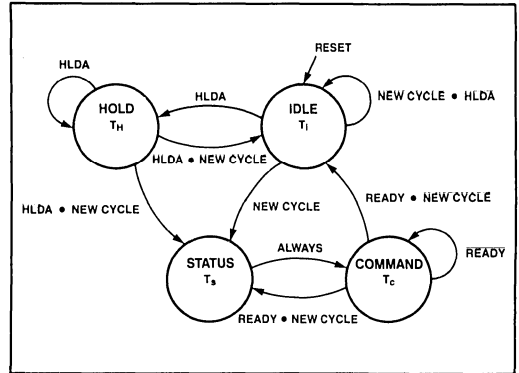


Figure 22. 80286 Bus States

Bus Operation

The 80286 uses a double frequency system clock (CLK input) to control bus timing. All signals on the local bus are measured relative to the system CLK input. The CPU divides the system clock by 2 to produce the internal processor clock, which determines bus state. Each processor clock is composed of two system clock cycles named phase 1 and phase 2. The 82284 clock generator output (PCLK) identifies the next phase of the processor clock. (See Figure 21.)

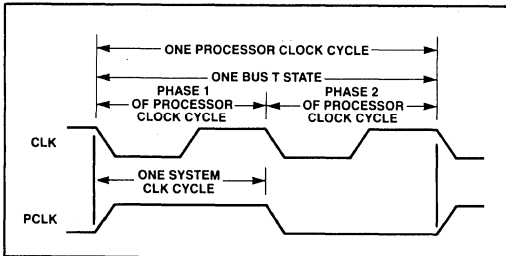


Figure 21. System and Processor Clock Relationships

Six types of bus operations are supported; memory read, memory write, I/O read, I/O write, interrupt acknowledge, and halt/shutdown. Data can be transferred at a maximum rate of one word per two processor clock cycles.

The iAPX 286 bus has three basic states: idle (T_i), send status (T_s), and perform command (T_c). The 80286 CPU also has a fourth local bus state called hold (T_h). T_h indicates that the 80286 has surrendered control of the local bus to another bus master in response to a HOLD request.

Each bus state is one processor clock long. Figure 22 shows the four 80286 local bus states and allowed transitions.

Bus States

The idle (T_i) state indicates that no data transfers are in progress or requested. The first active state T_s is signaled by status line **S₁** or **S₀** going LOW and identifying phase 1 of the processor clock. During T_s, the command encoding, the address, and data (for a write operation) are available on the 80286 output pins. The 82288 bus controller decodes the status signals and generates Multibus compatible read/write command and local transceiver control signals.

After T_s, the perform command (T_c) state is entered. Memory or I/O devices respond to the bus operation during T_c, either transferring read data to the CPU or accepting write data. T_c states may be repeated as often as necessary to assure sufficient time for the memory or I/O device to respond. The **READY** signal determines whether T_c is repeated. A repeated T_c state is called a wait state.

During hold (T_h), the 80286 will float all address, data, and status output pins enabling another bus master to use the local bus. The 80286 HOLD input signal is used to place the 80286 into the T_h state. The 80286 HLDA output signal indicates that the CPU has entered T_h.

Pipelined Addressing

The 80286 uses a local bus interface with pipelined timing to allow as much time as possible for data access. Pipelined timing allows a new bus operation to be initiated every two processor cycles, while allowing each individual bus operation to last for three processor cycles.

The timing of the address outputs is pipelined such that the address of the next bus operation becomes available during the current bus operation. Or in other words, the first clock of the next bus operation is overlapped with the last clock of the current bus operation. Therefore, address decode and routing logic can operate in ad-

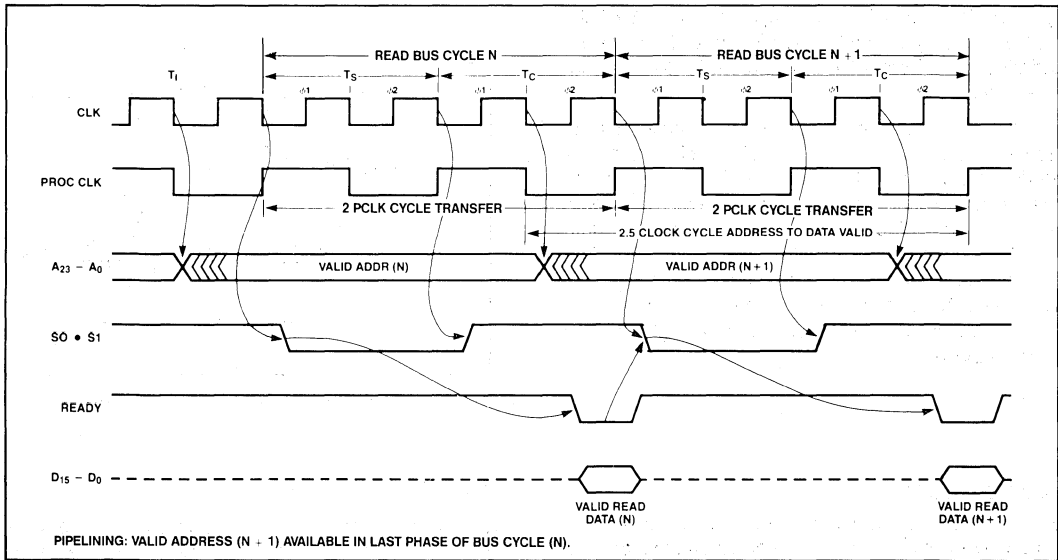


Figure 23. Basic Bus Cycle

advance of the next bus operation. External address latches may hold the address stable for the entire bus operation, and provide additional AC and DC buffering.

The 80286 does not maintain the address of the current bus operation during all T_C states. Instead, the address for the next bus operation may be emitted during phase 2 of any T_C. The address remains valid during phase 1 of the first T_C to guarantee hold time, relative to ALE, for the address latch inputs.

Bus Control Signals

The 82288 bus controller provides control signals; address latch enable (ALE), Read/Write commands, data transmit/receive (DT/R), and data enable (DEN) that control the address latches, data transceivers, write enable, and output enable for memory and I/O systems.

The Address Latch Enable (ALE) output determines when the address may be latched. ALE provides at least one system CLK period of address hold time from the end of the previous bus operation until the address for the next bus operation appears at the latch outputs. This address hold time is required to support Multibus® and common memory systems.

The data bus transceivers are controlled by 82288 outputs Data Enable (DEN) and Data Transmit/Receive (DT/R). DEN enables the data transceivers; while DT/R controls transceiver direction. DEN and DT/R are timed to prevent bus contention between the bus master, data bus transceivers, and system data bus transceivers.

Command Timing Controls

Two system timing customization options, command extension and command delay, are provided on the iAPX 286 local bus.

Command extension allows additional time for external devices to respond to a command and is analogous to inserting wait states on the 8086. External logic can control the duration of any bus operation such that the operation is only as long as necessary. The READY input signal can extend any bus operation for as long as necessary.

Command delay allows an increase of address or write data setup time to system bus command active for any bus operation by delaying when the system bus command becomes active. Command delay is controlled by the 82288 CMDLY input. After T_S, the bus controller samples CMDLY at each falling edge of CLK. If CMDLY is HIGH, the 82288 will not activate the command signal. When CMDLY is LOW, the 82288 will activate the command signal. After the command becomes active, the CMDLY input is not sampled.

When a command is delayed, the available response time from command active to return read data or accept write data is less. To customize system bus timing, an address decoder can determine which bus operations require delaying the command. The CMDLY input does not affect the timing of ALE, DEN, or DT/R.

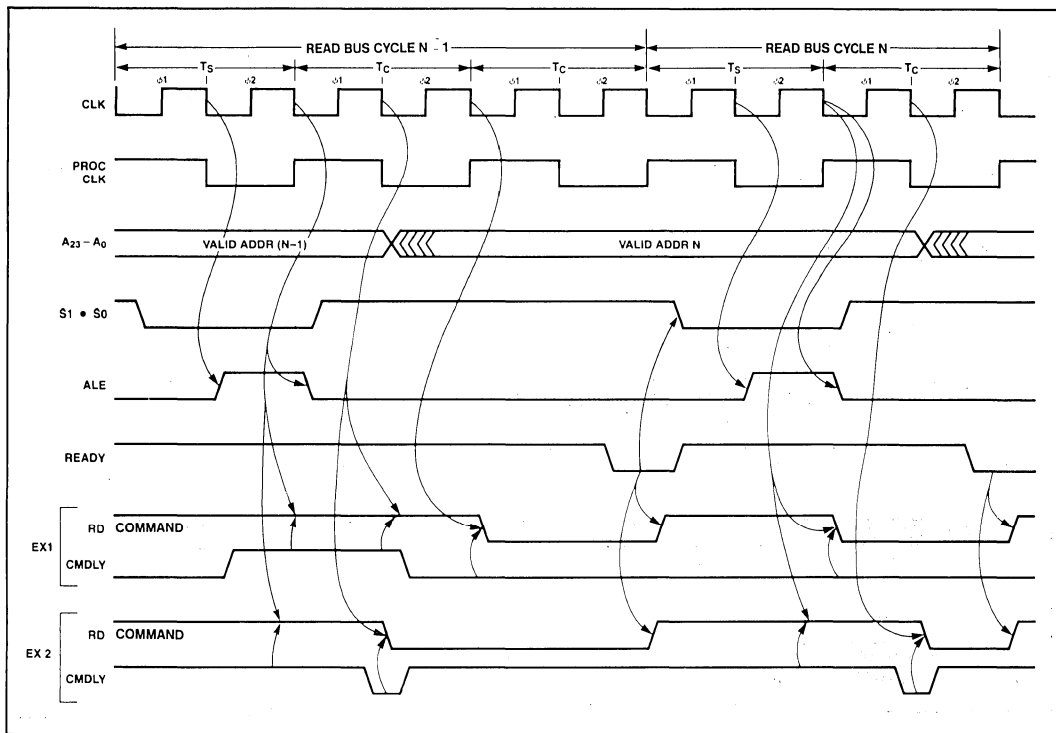


Figure 24. CMDLY Controls the Leading Edge of Command Signal.

Figure 24 illustrates four uses of CMDLY. Example 1 shows delaying the read command two system CLKs for cycle N-1 and no delay for cycle N, and example 2 shows delaying the read command one system CLK for cycle N-1 and one system CLK delay for cycle N.

Bus Cycle Termination

At maximum transfer rates, the iAPX 286 bus alternates between the status and command states. The bus status signals become inactive after T_S so that they may correctly signal the start of the next bus operation after the completion of the current cycle. No external indication of T_C exists on the iAPX 286 local bus. The bus master and bus controller enter T_C directly after T_S and continue executing T_C cycles until terminated by **READY**.

READY Operation

The current bus master and 82288 bus controller terminate each bus operation simultaneously to achieve maximum bus operation bandwidth. Both are informed in advance by **READY** active (open-collector output from 82284) which identifies the last T_C cycle of the

current bus operation. The bus master and bus controller must see the same sense of the **READY** signal, thereby requiring **READY** be synchronous to the system clock.

Synchronous Ready

The 82284 clock generator provides **READY** synchronization from both synchronous and asynchronous sources (see Figure 25). The synchronous ready input (**SRDY**) of the clock generator is sampled with the falling edge of **CLK** at the end of phase 1 of each T_C . The state of **SRDY** is then broadcast to the bus master and bus controller via the **READY** output line.

Asynchronous Ready

Many systems have devices or subsystems that are asynchronous to the system clock. As a result, their ready outputs cannot be guaranteed to meet the 82284 **SRDY** setup and hold time requirements. But the 82284 asynchronous ready input (**ARDY**) is designed to accept such signals. The **ARDY** input is sampled at the beginning of each T_C cycle by 82284 synchronization logic. This provides one system CLK cycle time to resolve its value before broadcasting it to the bus master and bus controller.

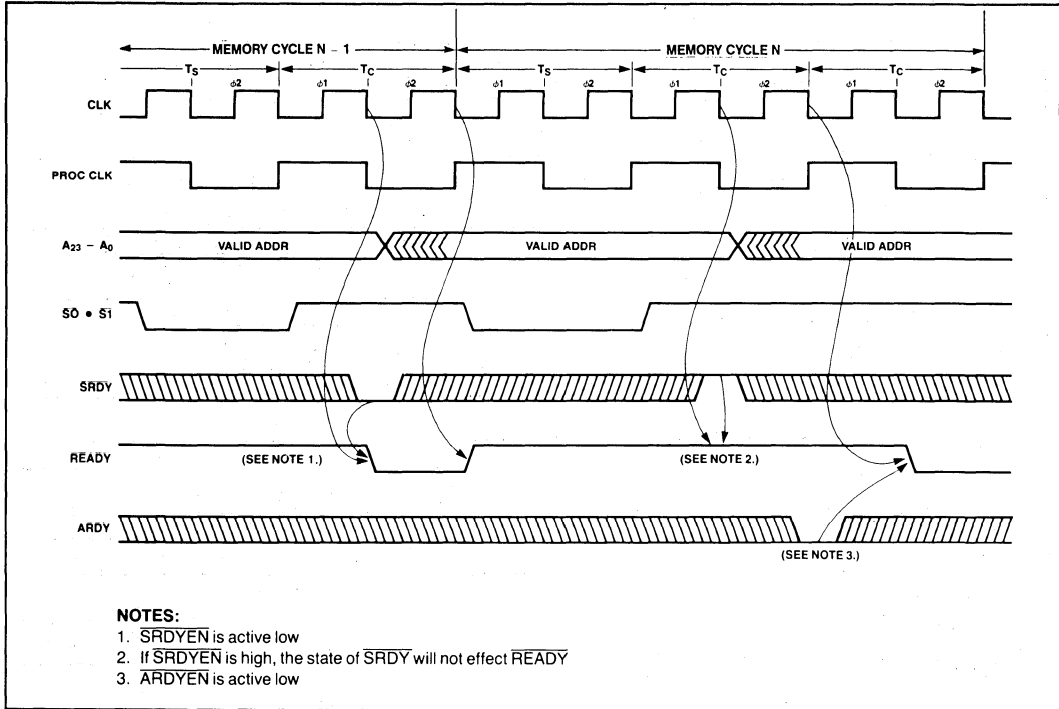


Figure 25. Synchronous and Asynchronous Ready

$\overline{\text{ARDY}}$ or $\overline{\text{ARDYEN}}$ must be HIGH at the end of T_S . $\overline{\text{ARDY}}$ cannot be used to terminate bus cycle with no wait states.

Each ready input of the 82284 has an enable pin ($\overline{\text{SRDYEN}}$ and $\overline{\text{ARDYEN}}$) to select whether the current bus operation will be terminated by the synchronous or asynchronous ready. Either of the ready inputs may terminate a bus operation. These enable inputs are active low and have the same timing as their respective ready inputs. Address decode logic usually selects whether the current bus operation should be terminated by $\overline{\text{ARDY}}$ or $\overline{\text{SRDY}}$.

Data Bus Control

Figures 26, 27, and 28 show how the $\overline{\text{DT/R}}$, $\overline{\text{DEN}}$, data bus, and address signals operate for different combinations of read, write, and idle bus operations. $\overline{\text{DT/R}}$ goes active (LOW) for a read operation. $\overline{\text{DT/R}}$ remains HIGH before, during, and between write operations.

The data bus is driven with write data during the second phase of T_S . The delay in write data timing allows the read data drivers, from a previous read cycle, sufficient time to enter 3-state OFF before the 80286 CPU begins driving the local data bus for write operations. Write data will always remain valid for one system clock past the last T_C to provide sufficient hold time for Multibus or other similar memory or I/O systems. During write-read or write-idle sequences the data bus enters 3-state OFF during the second phase of the processor cycle after the last T_C . In a write-write sequence the data bus does not enter 3-state OFF between T_C and T_S .

Bus Usage

The 80286 local bus may be used for several functions: instruction data transfers, data transfers by other bus masters, instruction fetching, processor extension data transfers, interrupt acknowledge, and halt/shutdown. This section describes local bus activities which have special signals or requirements.

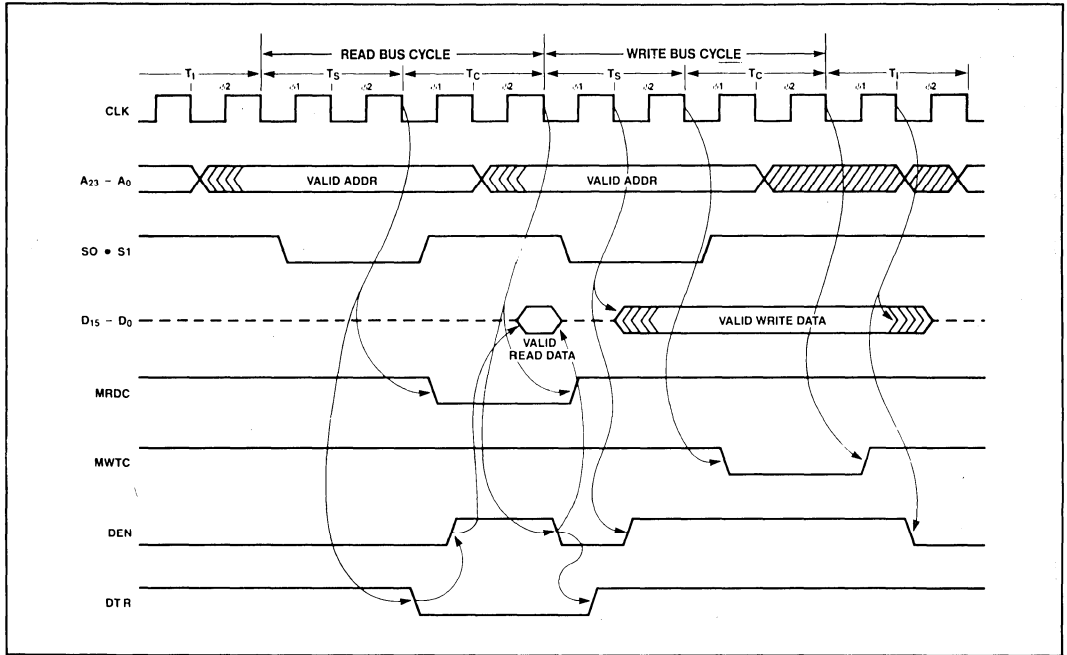


Figure 26. Back to Back Read-Write Cycles

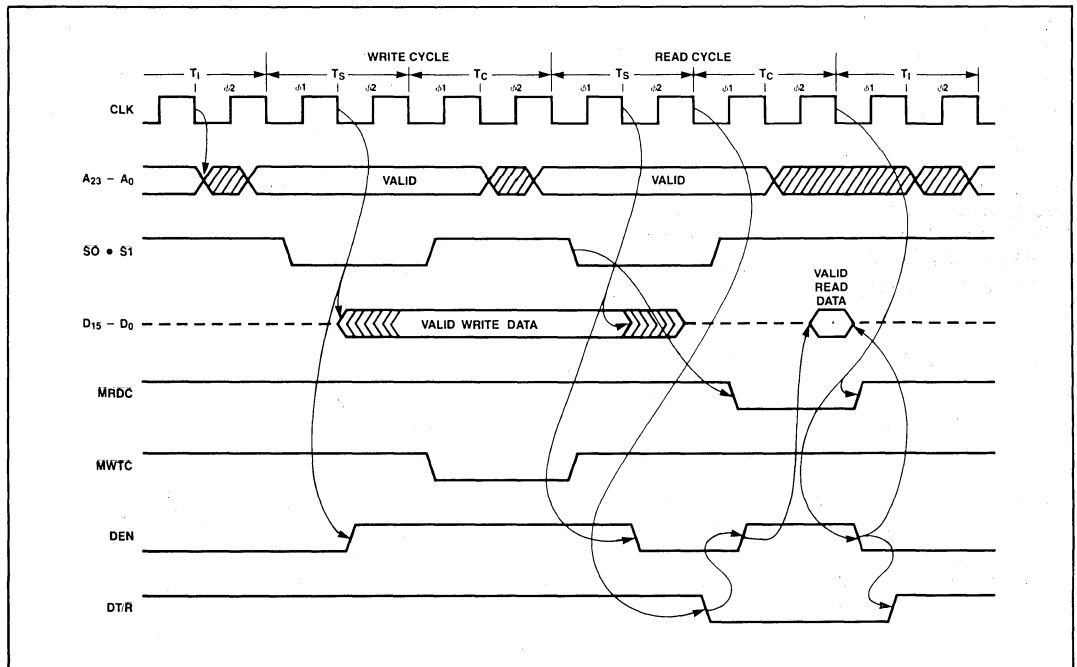


Figure 27. Back to Back Write-Read Cycles

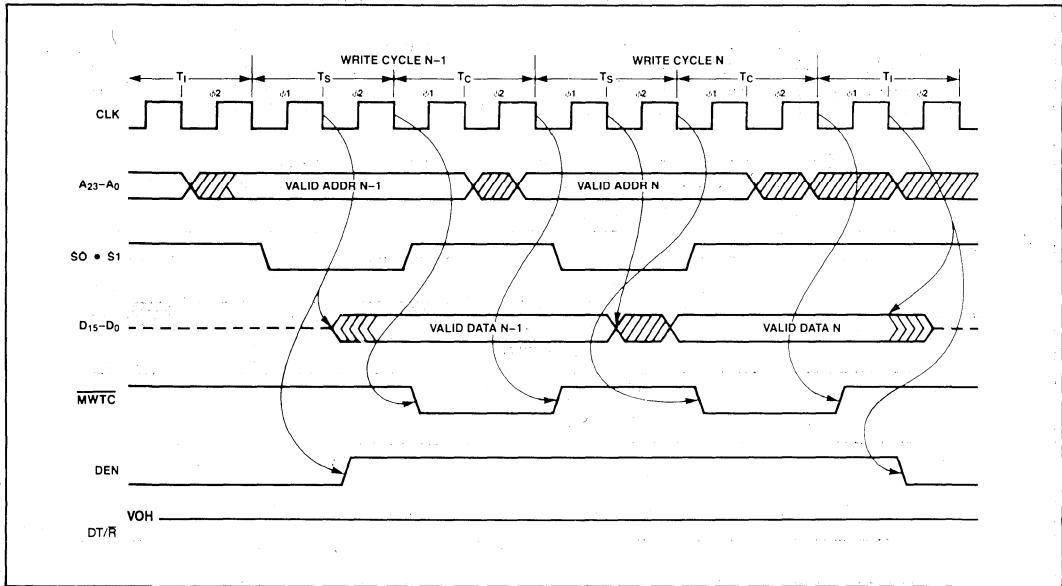


Figure 28. Back to Back Write-Write Cycles

HOLD and HLDA

HOLD and HLDA allow another bus master to gain control of the local bus by placing the 80286 bus into the T_h state. The sequence of events required to pass control between the 80286 and another local bus master are shown in Figure 29.

In this example, the 80286 is initially in the T_h state as signaled by HLDA being active. Upon leaving T_h , as signaled by HLDA going inactive, a write operation is started. During the write operation another local bus master requests the local bus from the 80286 as shown by the HOLD signal. After completing the write operation, the 80286 performs one T_1 bus cycle, to guarantee write data hold time, then enters T_h as signaled by HLDA going active.

The CMDLY signal and \overline{ARDY} ready are used to start and stop the write bus command, respectively. Note that \overline{SRDY} must be inactive or disabled by \overline{SRDYEN} to guarantee \overline{ARDY} will terminate the cycle.

Instruction Fetching

The 80286 Bus Unit (BU) will fetch instructions ahead of the current instruction being executed. This activity is called prefetching. It occurs when the local bus would otherwise be idle and obeys the following rules:

A prefetch bus operation starts when at least two bytes of the 6-byte prefetch queue are empty.

The prefetcher normally performs word prefetches independent of the byte alignment of the code segment base in physical memory.

The prefetcher will perform only a byte code fetch operation for control transfers to an instruction beginning on a numerically odd physical address.

Prefetching stops whenever a control transfer or HLT instruction is decoded by the IU and placed into the instruction queue.

In real address mode, the prefetcher may fetch up to 6 bytes beyond the last control transfer or HLT instruction in a code segment.

In protected mode, the prefetcher will never cause a segment overrun exception. The prefetcher stops at the last physical memory word of the code segment. Exception 13 will occur if the program attempts to execute beyond the last full instruction in the code segment.

If the last byte of a code segment appears on an even physical memory address, the prefetcher will read the next physical byte of memory (perform a word code fetch). The value of this byte is ignored and any attempt to execute it causes exception 13.

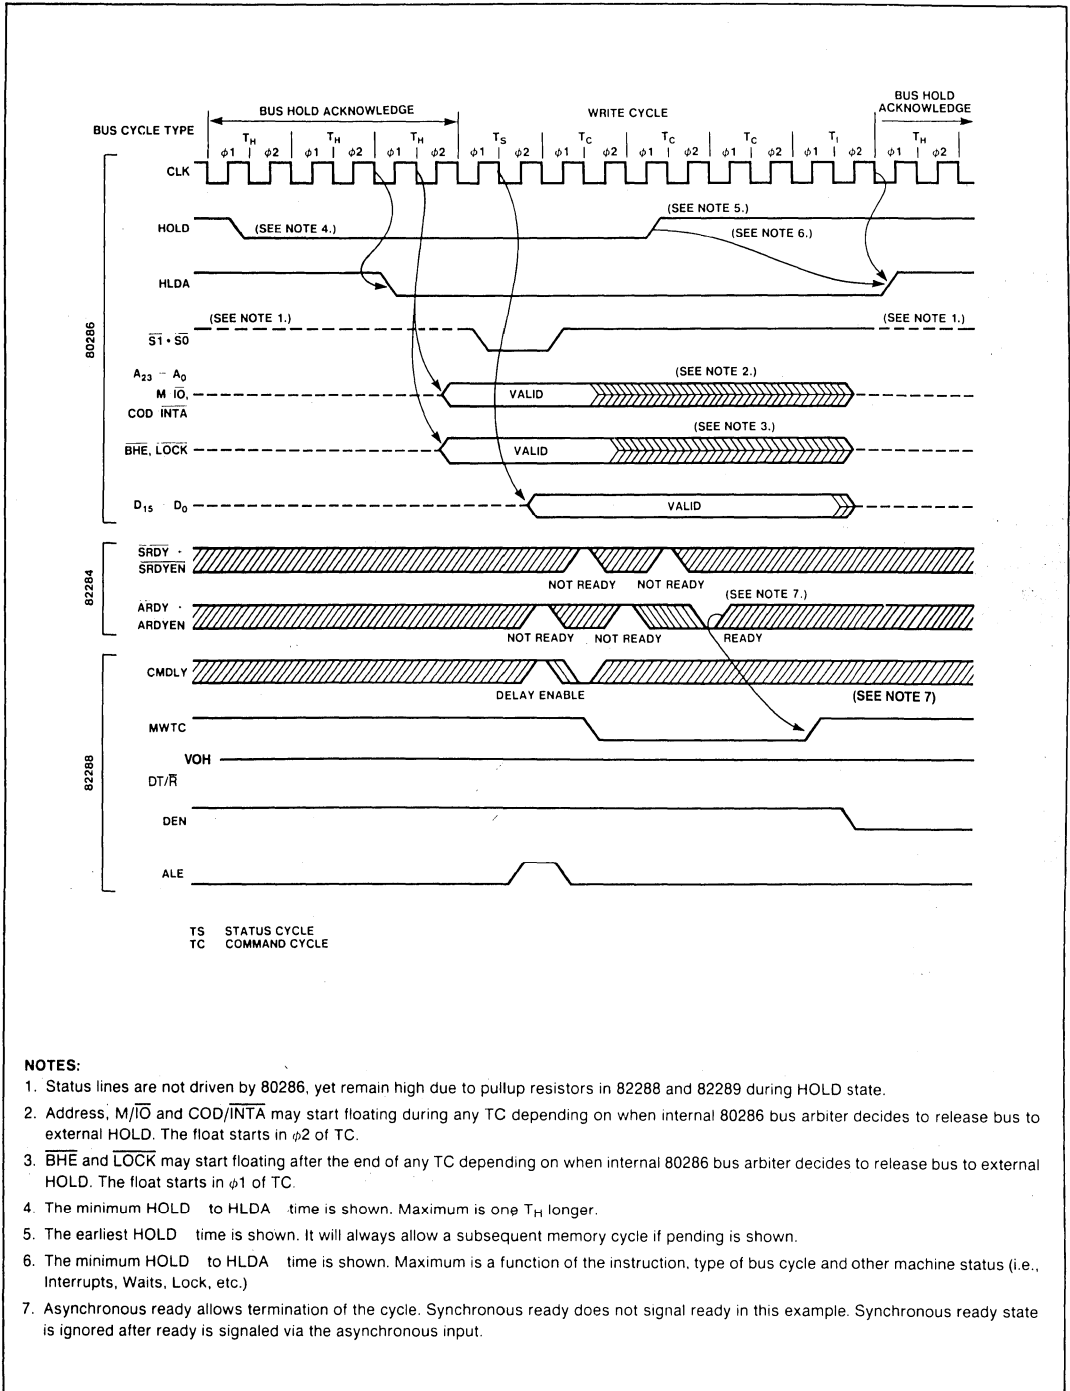


Figure 29. Multibus Write Terminated by Asynchronous Ready with Bus Hold

Processor Extension Transfers

The processor extension interface uses I/O port addresses 00F8(H), 00FA(H), and 00FC(H) which are part of the I/O port address range reserved by Intel. An ESC instruction with Machine Status Word bits EM = 0 and TS = 0 will perform I/O bus operations to one or more of these I/O port addresses independent of the value of IOPM and CPL.

ESC instructions with memory references enable the CPU to accept PEREQ inputs for processor extension operand transfers. The CPU will determine the operand starting address and read/write status of the instruction. For each operand transfer, two or three bus operations are performed, one word transfer with I/O port address 00FA(H) and one or two bus operations with memory. Three bus operations are required for each word operand and aligned on an odd byte address.

Interrupt Acknowledge Sequence

Figure 30 illustrates an interrupt acknowledge sequence performed by the 80286 in response to an INTR input. An interrupt acknowledge sequence consists of two INTA bus operations. The first allows a master 8259A Programmable Interrupt Controller (PIC) to determine which if any of its slaves should return the interrupt vector. An eight bit vector is read on D0-D7 of the 80286 during the second INTA bus operation to select an interrupt handler routine from the interrupt table.

The Master Cascade Enable (MCE) signal of the 82288 is used to enable the cascade address drivers, during INTA bus operations (See Figure 30), onto the local address bus for distribution to slave interrupt controllers via the system address bus. The 80286 emits the LOCK signal (active LOW) during T_s of the first INTA bus operation. A local bus "hold" request will not be honored until the end of the second INTA bus operation.

Three idle processor clocks are provided by the 80286 between INTA bus operations to allow for the minimum INTA to INTA time and CAS (cascade address) out delay of the 8259A. The second INTA bus operation must always have at least one extra T_c state added via logic controlling READY. A₂₃-A₀ are in 3-state OFF until after the first T_c state of the second INTA bus operation. This prevents bus contention between the cascade address drivers and CPU address drivers. The extra T_c state allows time for the 80286 to resume driving the address lines for subsequent bus operations.

Local Bus Usage Priorities

The 80286 local bus is shared among several internal units and external HOLD requests. In case of simultaneous requests, their relative priorities are:


- (Highest) Any transfers which assert LOCK either explicitly (via the LOCK instruction prefix) or implicitly (i.e. segment descriptor access, interrupt acknowledge sequence, or an XCHG with memory).
 - The second of the two byte bus operations required for an odd aligned word operand.
 - The second or third cycle of a processor extension data transfer.
 - Local bus request via HOLD input.
 - Processor extension data operand transfer via PEREQ input.
 - Data transfer performed by EU as part of an instruction.
- (Lowest) An instruction prefetch request from BU. The EU will inhibit prefetching two processor clocks in advance of any data transfers to minimize waiting by EU for a prefetch to finish.



Halt or Shutdown Cycles

The 80286 externally indicates halt or shutdown conditions as a bus operation. These conditions occur due to a HLT instruction or multiple protection exceptions while attempting to execute one instruction. A halt or shutdown bus operation is signalled when ST, S0 and COD/INTA are LOW and M/IO is HIGH. A₁ HIGH indicates halt, and A₁ LOW indicates shutdown. The 82288 bus controller does not issue ALE, nor is READY required to terminate a halt or shutdown bus operation.

During halt or shutdown, the 80286 may service PEREQ or HOLD requests. A processor extension segment overrun exception during shutdown will inhibit further service of PEREQ. Either NMI or RESET will force the 80286 out of either halt or shutdown. An INTR, if interrupts are enabled, or a processor extension segment overrun exception will also force the 80286 out of halt.

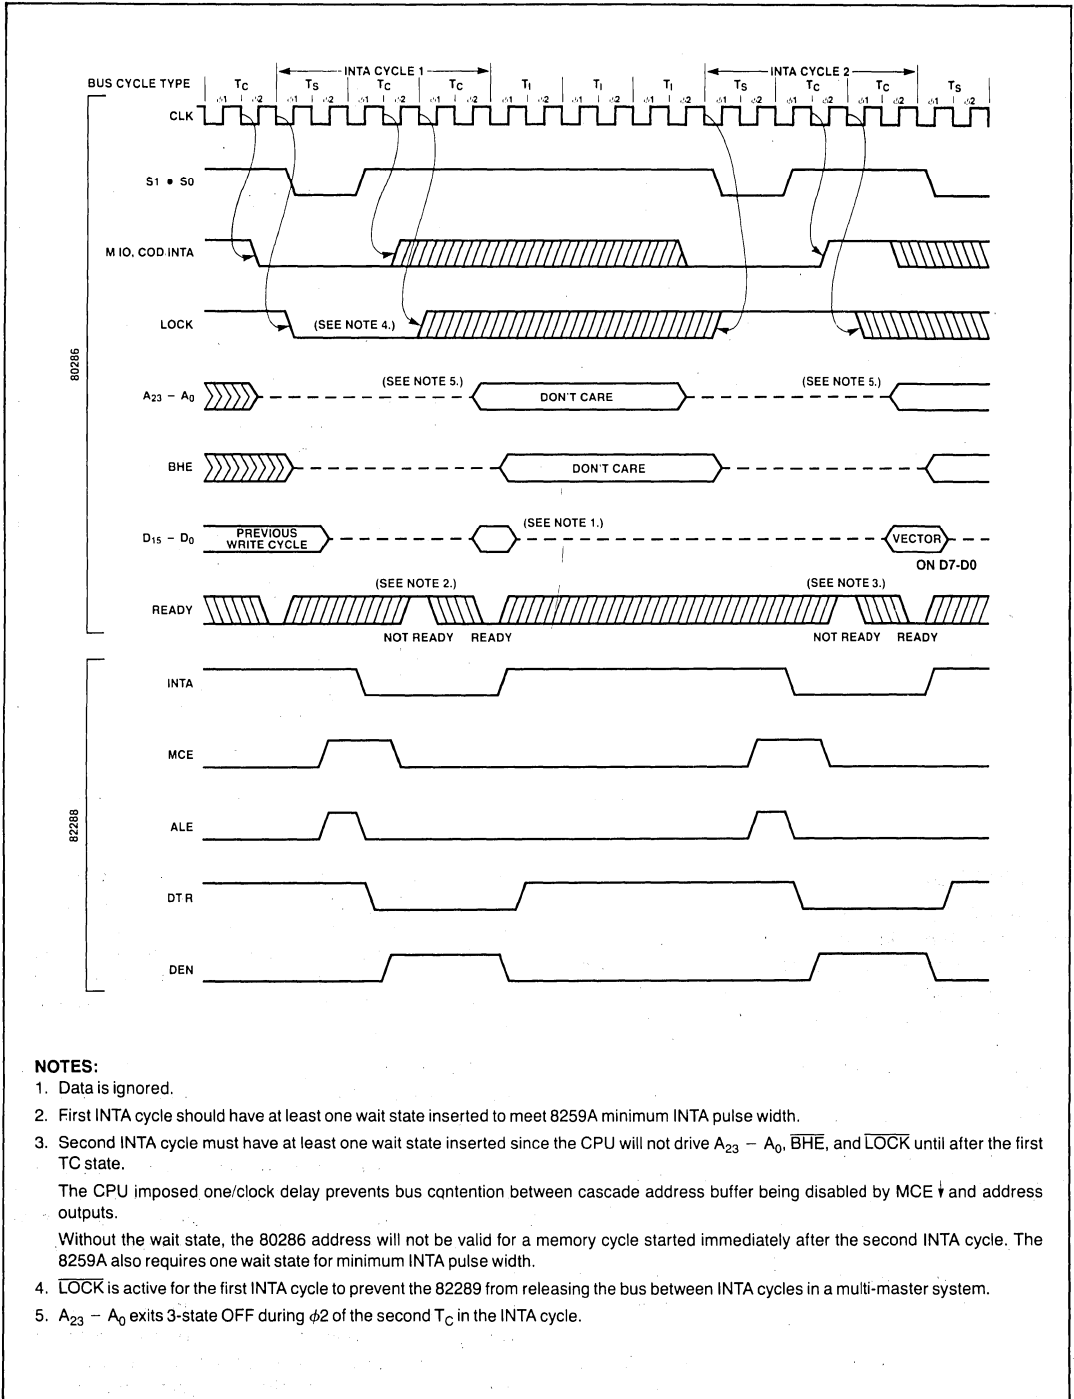

NOTES:

1. Data is ignored.
2. First INTA cycle should have at least one wait state inserted to meet 8259A minimum INTA pulse width.
3. Second INTA cycle must have at least one wait state inserted since the CPU will not drive A₂₃ - A₀, BHE, and LOCK until after the first TC state.
The CPU imposed one/clock delay prevents bus contention between cascade address buffer being disabled by MCE ↑ and address outputs.
- Without the wait state, the 80286 address will not be valid for a memory cycle started immediately after the second INTA cycle. The 8259A also requires one wait state for minimum INTA pulse width.
4. LOCK is active for the first INTA cycle to prevent the 82289 from releasing the bus between INTA cycles in a multi-master system.
5. A₂₃ - A₀ exits 3-state OFF during φ2 of the second T_c in the INTA cycle.

Figure 30. Interrupt Acknowledge Sequence

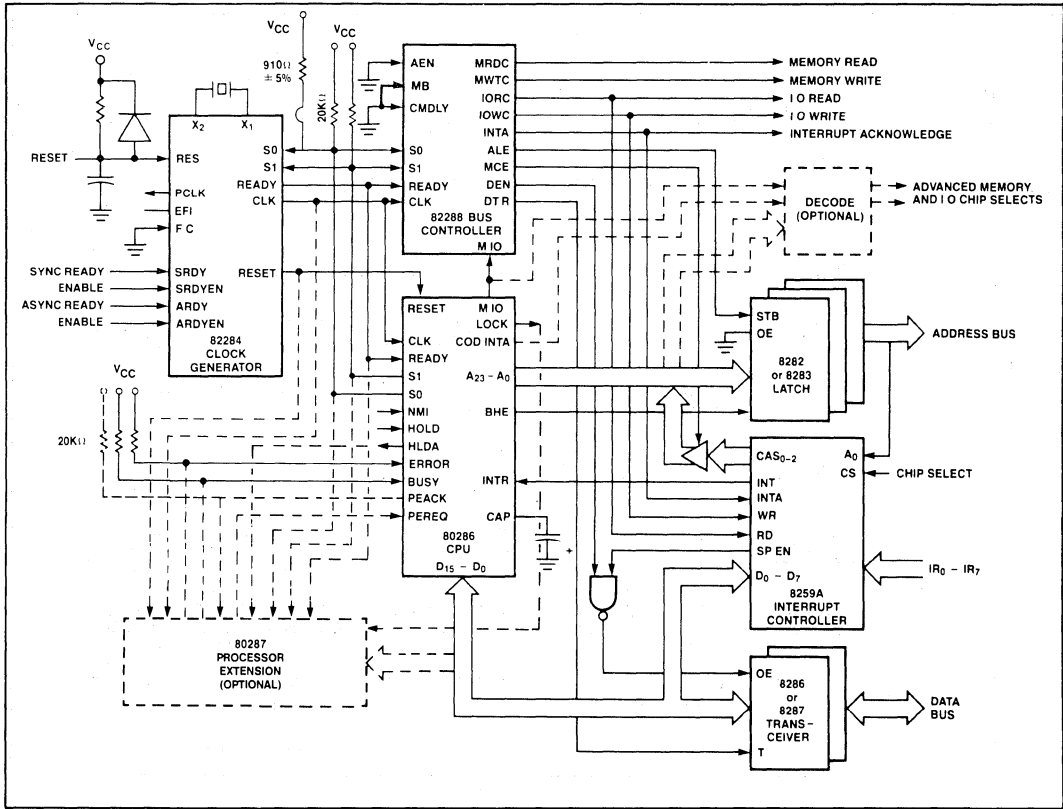


Figure 31. Basic iAPX 286 System Configuration

SYSTEM CONFIGURATIONS

The versatile bus structure of the iAPX 286 microsystem, with a full complement of support chips, allows flexible configuration of a wide range of systems. The basic configuration, shown in Figure 31, is similar to an iAPX 86 maximum mode system. It includes the CPU plus an 8259A interrupt controller, 82284 clock generator, and the 82288 Bus Controller. The iAPX 86 latches (8282 and 8283) and transceivers (8286 and 8287) may be used in an iAPX 286 microsystem.

As indicated by the dashed lines in Figure 31, the ability to add processor extensions is an integral feature of iAPX 286 microsystems. The processor extension interface allows external hardware to perform special functions and transfer data concurrent with CPU execution of other instructions. Full system integrity is maintained because the 80286 supervises all data transfers and instruction execution for the processor extension.

The iAPX 286/20 numeric data processor which includes the 80287 numeric processor extension (NPX)

uses this interface. The iAPX 286/20 has all the instructions and data types of an iAPX 86/20 or iAPX 88/20. The 80287 NPX can perform numeric calculations and data transfers concurrently with CPU program execution. Numerics code and data have the same integrity as all other information protected by the iAPX 286 protection mechanism.

The 80286 can overlap chip select decoding and address propagation during the data transfer for the previous bus operation. This information is latched into the 8282/3's by ALE during the middle of a T_s cycle. The latched chip select and address information remains stable during the bus operation while the next cycles address is being decoded and propagated into the system. Decode logic can be implemented with a high speed bipolar PROM.

The optional decode logic shown in Figure 31 takes advantage of the overlap between address and data of the 80286 bus cycle to generate advanced memory and IO-select signals. This minimizes system performance

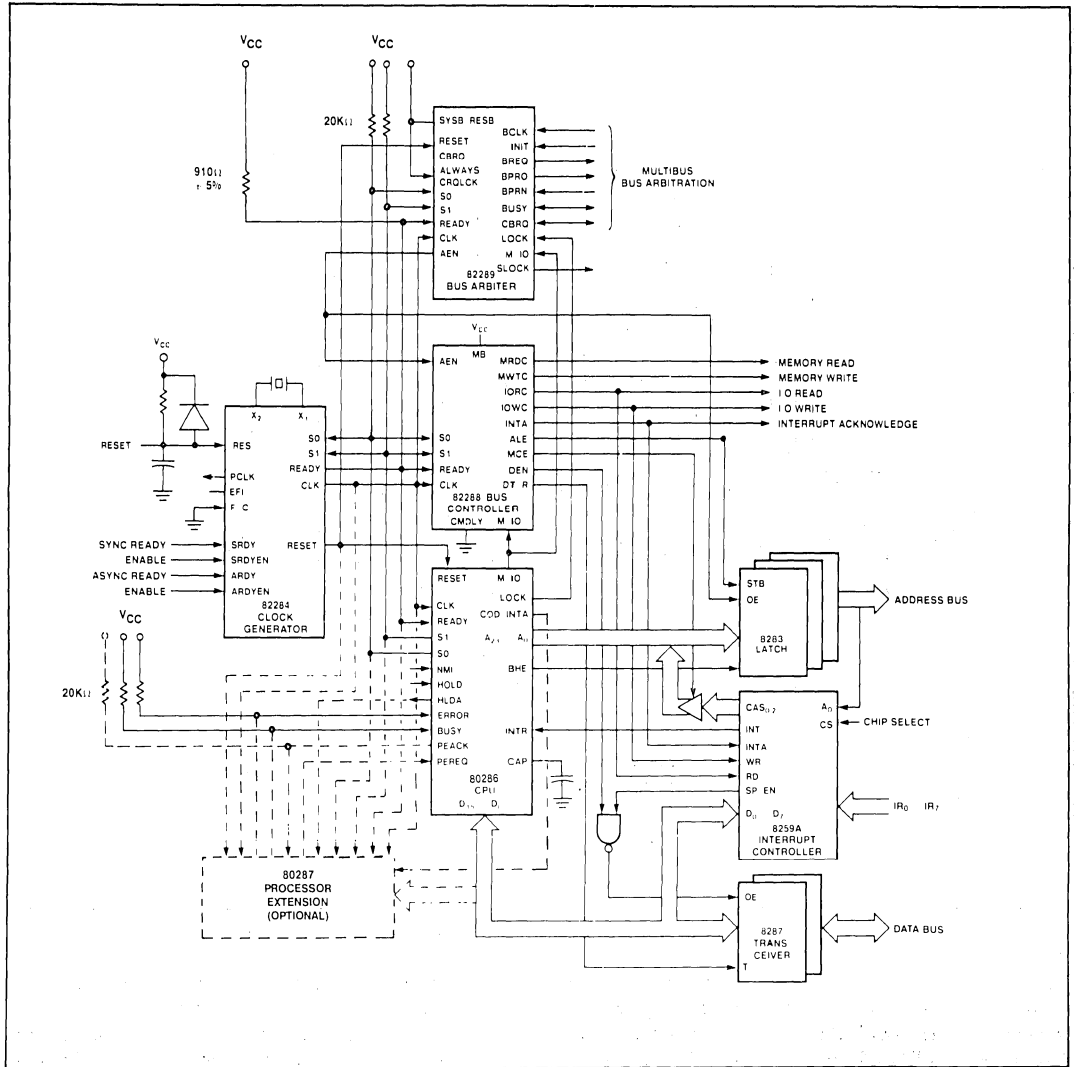


Figure 32. Multibus System Bus Interface

degradation caused by address propagation and decode delays. In addition to selecting memory and I/O, the advanced selects may be used with configurations supporting local and system buses to enable the appropriate bus interface for each bus cycle. The COD/INTA and M/I0 signals are applied to the decode logic to distinguish between interrupt, I/O, code and data bus cycles.

By adding the 82289 bus arbiter chip the 80286 provides a Multibus system bus interface as shown in Figure 32. The ALE output of the 82288 for the Multibus bus is

connected to its CMDLY input to delay the start of commands one system CLK as required to meet Multibus address and write data setup times. This arrangement will add at least one extra T_c state to each bus operation which uses the Multibus.

A second 82288 bus controller and additional latches and transceivers could be added to the local bus of Figure 32. This configuration allows the 80286 to support an on-board bus for local memory and peripherals, and the Multibus for system bus interfacing.

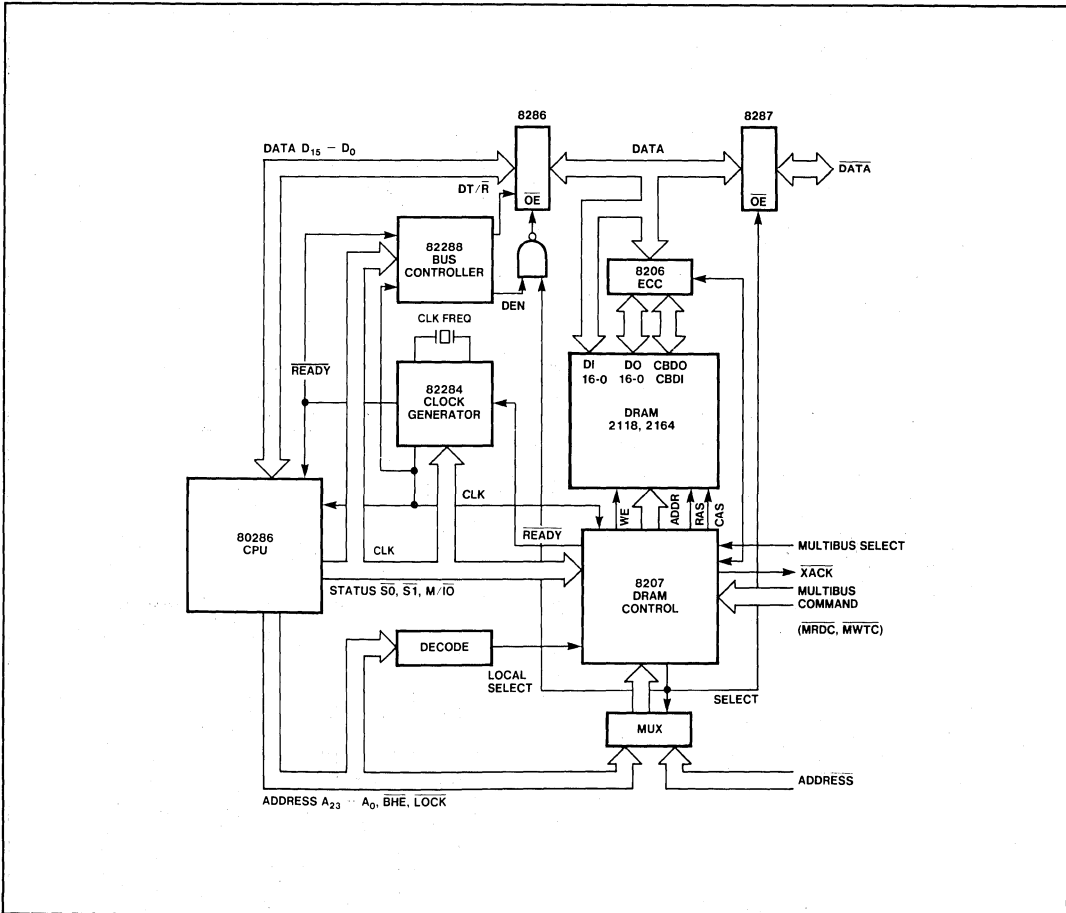


Figure 33. iAPX 286 System Configuration with Dual-Ported Memory

Figure 33 shows the addition of dual ported dynamic memory between the Multibus system bus and the iAPX 286 local bus. The dual port interface is provided by the 8207 Dual Port DRAM Controller. The 8207 runs synchronously with the CPU to maximize throughput for local memory references. It also arbitrates between requests from the local and system buses and performs

functions such as refresh, initialization of RAM, and read/modify/write cycles. The 8207 combined with the 8206 Error Checking and Correction memory controller provide for single bit error correction. The dual-ported memory can be combined with a standard Multibus system bus interface to maximize performance and protection in multiprocessor system configurations.

Table 16. 80286 Systems Recommended Pull up Resistor Values

| 80286 Pin and Name | Pullup Value | Purpose |
|-------------------------|------------------------|--|
| 4 - $\overline{S1}$ | 20K Ω \pm 10% | Pull $\overline{S0}$, $\overline{S1}$, and \overline{PEACK} inactive during 80286 hold periods |
| 5 - $\overline{S0}$ | | |
| 6 - \overline{PEACK} | | |
| 53 - \overline{ERROR} | 20K Ω \pm 10% | Pull \overline{ERROR} and \overline{BUSY} inactive when 80287 not present (or temporarily removed from socket) |
| 54 - \overline{BUSY} | | |
| 63 - \overline{READY} | 910 Ω \pm 5% | Pull \overline{READY} inactive within required minimum time ($C_L = 150pF$, $I_R \leq 7mA$) |

PACKAGE

The 80286 is packaged in a 68-pin, leadless JEDEC type A hermetic leadless chip carrier. Figure 34 illustrates the package, and Figure 2 shows the pinout.

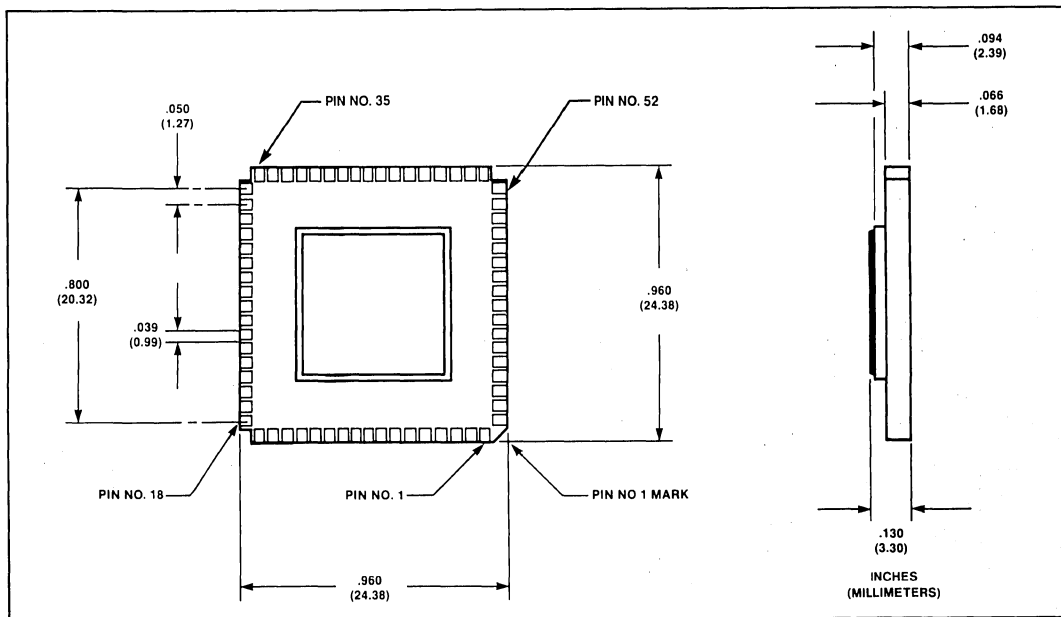


Figure 34. JEDEC Type A Package

ABSOLUTE MAXIMUM RATINGS*

- Ambient Temperature Under Bias 0°C to 70°C
- Storage Temperature - 65°C to + 150°C
- Voltage on Any Pin with Respect to Ground -1.0 to +7V
- Power Dissipation 3.6 Watt

*NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

D.C. CHARACTERISTICS (T_A = 0°C to 55°C, V_{CC} = 5V, ± 5%)

| Sym | Parameter | 4 MHz | | 6 MHz | | 8 MHz | | Unit | Test Condition |
|------------------|-------------------------------|--------|----------------------|--------|----------------------|-------|----------------------|------|---|
| | | -4 Min | -4 Max | -6 Min | -6 Max | Min | Max | | |
| V _{IL} | Input LOW Voltage | -5 | .8 | -5 | .8 | -5 | .8 | V | |
| V _{IH} | Input HIGH Voltage | 2.0 | V _{CC} + .5 | 2.0 | V _{CC} + .5 | 2.0 | V _{CC} + .5 | V | |
| V _{ILC} | CLK Input LOW Voltage | -5 | .6 | -5 | .6 | -5 | .6 | V | |
| V _{IHC} | CLK Input HIGH Voltage | 3.8 | V _{CC} + .5 | 3.8 | V _{CC} + .5 | 3.8 | V _{CC} + .5 | V | |
| V _{OL} | Output LOW Voltage | . | .45 | . | .45 | . | .45 | V | I _{OL} = 2.0mA |
| V _{OH} | Output HIGH Voltage | 2.4 | . | 2.4 | . | 2.4 | . | V | I _{OH} = -400µA |
| I _{LI} | Input Leakage Current | . | + -10 | . | + -10 | . | + -10 | µA | 0V ≤ V _{IN} ≤ V _{CC} |
| I _{LO} | Output Leakage Current | . | + -10 | . | + -10 | . | + -10 | µA | .45V ≤ V _{OUT} ≤ V _{CC} |
| I _{CC} | Supply Current (turn on, 0°C) | . | 600 | . | 600 | . | 600 | µA | Note 1 |
| C _{CLK} | CLK Input Capacitance | . | 12 | . | 12 | . | 12 | pF | F _C = 1MHz |
| C _{IN} | Other Input Capacitance | . | 10 | . | 10 | . | 10 | pF | F _C = 1MHz |
| C _O | Input/Output Capacitance | . | 20 | . | 20 | . | 20 | pF | F _C = 1MHz |

NOTE 1: Low temperature is worst case.

A.C. CHARACTERISTICS ($T_A = 0^\circ\text{C}$ to 55°C , $V_{CC} = 5\text{V}$, $\pm 5\%$)

AC timings are referenced to 0.8V and 2.0V points of signals as illustrated in datasheet waveforms, unless otherwise noted.

| Sym | Parameter | 4 MHz | | 6 MHz | | 8 MHz | | Unit | Test Condition |
|-----|---------------------------------|--------|--------|--------|--------|-------|-----|------|----------------|
| | | -4 Min | -4 Max | -6 Min | -6 Max | Min | Max | | |
| 1 | System Clock (CLK) Period | 124 | 250 | 83 | 250 | 62 | 250 | ns | |
| 2 | System Clock (CLK) LOW Time | 30 | 210 | 20 | 250 | 15 | 225 | ns | at 0.6V |
| 3 | System Clock (CLK) HIGH Time | 40 | 220 | 25 | 230 | 25 | 235 | ns | at 3.2V |
| 17 | System Clock (CLK) Rise Time | | 10 | | 10 | | 10 | ns | 1.0V to 3.5V |
| 18 | System Clock (CLK) Fall Time | | 10 | | 10 | | 10 | ns | 3.5V to 1.0V |
| 4 | Asynch. Inputs Setup Time | 40 | | 30 | | 20 | | ns | Note 1 |
| 5 | Asynch. Inputs Hold Time | 40 | | 30 | | 20 | | ns | Note 1 |
| 6 | RESET Setup Time | 40 | | 33 | | 28 | | ns | |
| 7 | RESET Hold Time | 5 | | 5 | | 5 | | ns | |
| 8 | Read Data Setup Time | 30 | | 20 | | 10 | | ns | |
| 9 | Read Data Hold Time | 8 | | 8 | | 8 | | ns | |
| 10 | READY Setup Time | 75 | | 50 | | 38 | | ns | |
| 11 | READY Hold Time | 50 | | 35 | | 25 | | ns | |
| 12 | Status/PEACK Valid Delay | 1 | 80 | 1 | 55 | 1 | 40 | ns | Note 2 Note 3 |
| 13 | Address Valid Delay | 1 | 120 | 1 | 80 | 1 | 60 | ns | Note 2 Note 3 |
| 14 | Write Data Valid Delay | 0 | 100 | 0 | 65 | 0 | 50 | ns | Note 2 Note 3 |
| 15 | Address/Status/Data Float Delay | 0 | 120 | 0 | 80 | 0 | 50 | ns | Note 2 Note 4 |
| 16 | HLDA Valid Delay | 0 | 120 | 0 | 80 | 0 | 50 | ns | Note 2 Note 3 |

NOTE: 1: Asynchronous inputs are INTR, NMI, HOLD, PREQ, ERROR, and BUSY. This specification is given only for testing purposes, to assure recognition at a specific CLK edge.

NOTE: 2: Delay from 0.8V on the CLK, to 0.8V or 2.0V or float on the output as appropriate for valid or floating condition.

NOTE: 3: Output load: $C_1 = 100\text{pF}$.

NOTE: 4: Float condition occurs when output current is less than I_{LO} in magnitude.

82284 Timing Requirements

| Symbol | Parameter | 82286-6 | | 82284 | | Units | Test Conditions |
|--------|------------------------|---------|------|-------|------|-------|--|
| | | Min. | Max. | Min. | Max. | | |
| 11 | SRDY/SRDYEN setup time | 25 | | 15 | | ns | |
| 12 | SRDY/SRDYEN hold time | 0 | | 0 | | ns | |
| 13 | ARDY/ARDYEN setup time | 5 | | 0 | | ns | See note 1 |
| 14 | ARDY/ARDYEN hold time | 30 | | 30 | | ns | See note 1 |
| 19 | PCLK delay | 0 | 45 | 0 | 45 | ns | $C_L = 75\text{pF}$ $I_{OL} = 5\text{ ma}$ $I_{OH} = -1\text{ ma}$ |


NOTE: These times are given for testing purposes to assure a predetermined action.

82288 Timing Requirements



| Symbol | Parameter | 82286-6 | | 82288 | | Units | Test Conditions | |
|--------|--------------------------|------------------|------|-------|------|-------|---|--|
| | | Min. | Max. | Min. | Max. | | | |
| 12 | CMDLY setup time | 25 | | 20 | | ns | | |
| 13 | CMDLY hold time | 1 | | 1 | | ns | | |
| 30 | Command delay From CLK | Command Inactive | 3 | 30 | 3 | 25 | ns | $C_L = 300\text{ pF max}$ $I_{OL} = 32\text{ ma max}$ $I_{OH} = 5\text{ ma max}$ |
| 29 | | Command Active | 3 | 40 | 3 | 25 | | |
| 16 | ALE active delay | 3 | 25 | 3 | 20 | ns | $C_L = 150\text{ pF}$ $I_{OL} = 16\text{ ma max}$ $I_{OH} = -1\text{ ma max}$ | |
| 17 | ALE inactive delay | | 35 | | 25 | ns | | |
| 19 | DT/R read active delay | | 40 | | 25 | ns | | |
| 22 | DT/R read inactive delay | 5 | 45 | 5 | 35 | ns | | |
| 20 | DEN read active delay | 5 | 50 | 5 | 35 | ns | | |
| 21 | DEN read inactive delay | 3 | 40 | 3 | 35 | ns | | |
| 23 | DEN write active delay | | 35 | | 30 | ns | | |
| 24 | DEN write inactive delay | 3 | 35 | 3 | 30 | ns | | |

WAVEFORMS

MAJOR CYCLE TIMING

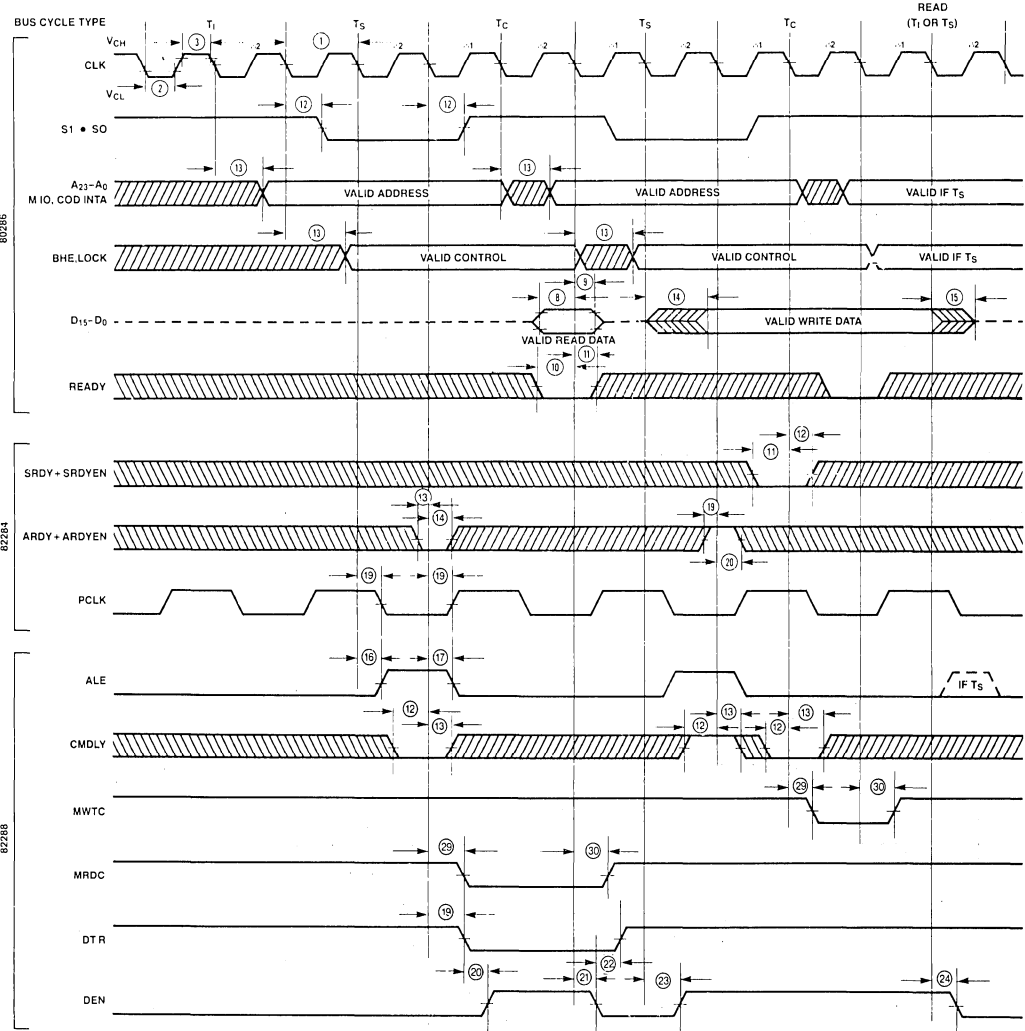


WAVEFORMS (Continued)

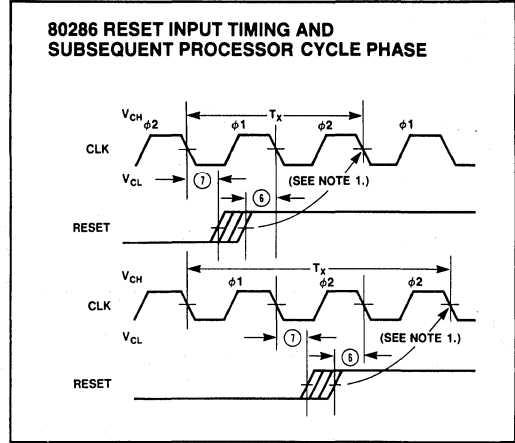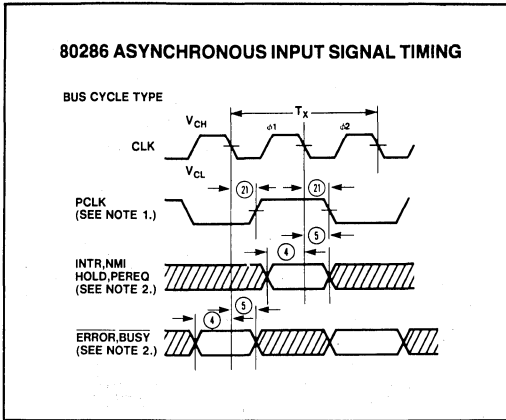

NOTES:

1. PCLK indicates which processor cycle phase will occur on the next CLK. PCLK may not indicate the correct phase until the first bus cycle is performed.
2. These inputs are asynchronous. The setup and hold times shown assure recognition for testing purposes.


NOTE 1: When RESET meets the setup time shown, the next CLK will start or repeat $\phi 2$ of a processor cycle.

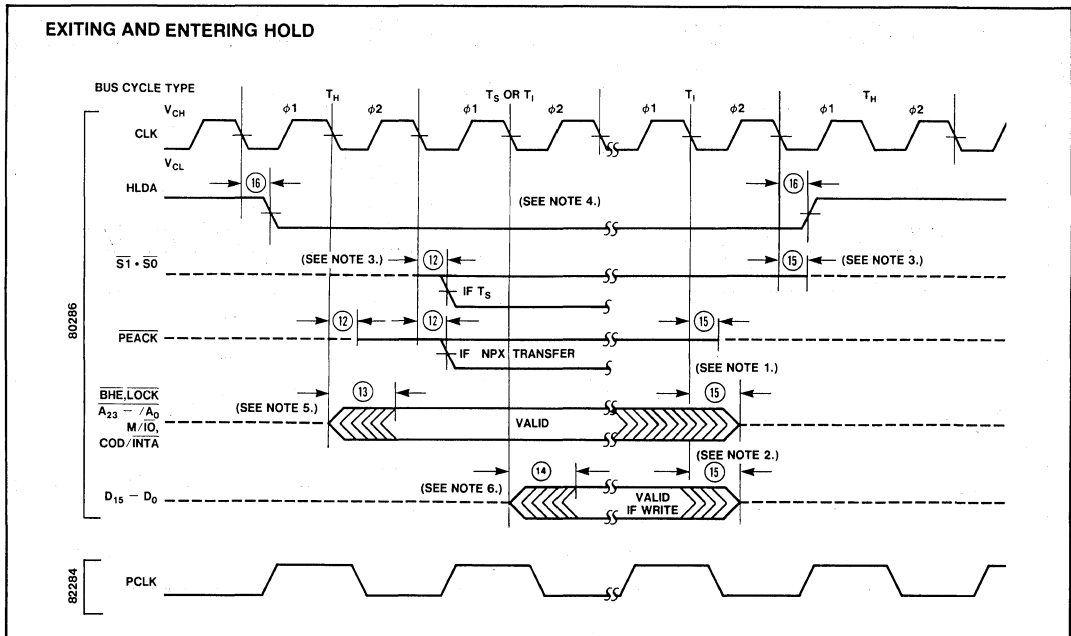

NOTES:


1. These signals may not be driven by the 80286 during the time shown. The worst case in terms of latest float time is shown.
2. The data bus will be driven as shown if the last cycle before T_I in the diagram was a write T_C .
3. The 80286 floats its status pins during T_H . External 20K Ω resistors keep these signals high (see Table 16).
4. For HOLD request set up to HLDA, refer to Figure 29.
5. BHE and LOCK are driven at this time but will not become valid until T_S .
6. The data bus will remain in 3-state OFF if a read cycle is performed.

WAVEFORMS (Continued)

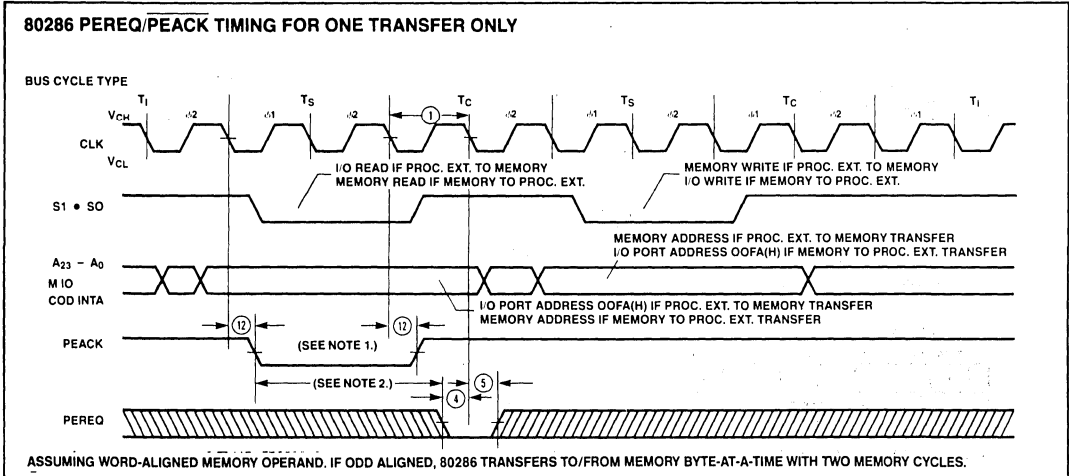

NOTES:

1. PEACK always goes active during the first bus operation of a processor extension data operand transfer sequence. The first bus operation will be either a memory read at operand address or I/O read at port address OOF(A).
2. To prevent a second processor extension data operand transfer, the worst case maximum time (Shown above) is: $3X(1) - (1)_{max} - (4)_{min}$. The actual, configuration dependent, maximum time is: $3X(1) - (1)_{max} - (4)_{min} + AX2X(1)$. A is the number of extra T_c states added to either the first or second bus operation of the processor extension data operand transfer sequence.

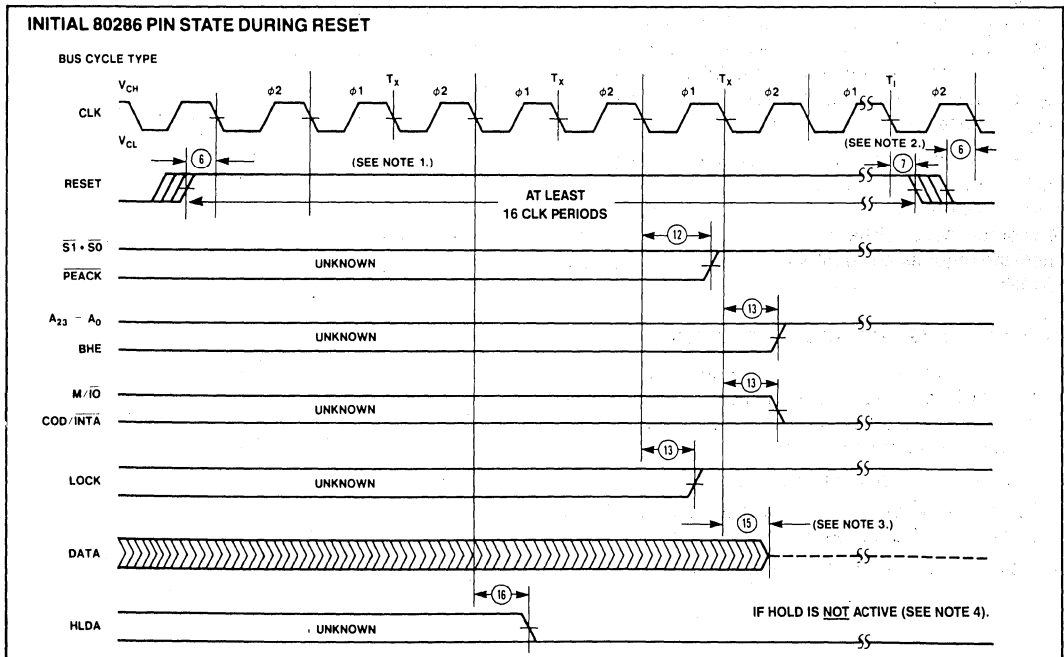

NOTES:

1. Setup time for RESET ↑ may be violated with the consideration that φ1 of the processor clock may begin one system CLK period later.
2. Setup and hold times for RESET ↓ must be met for proper operation, but RESET ↓ may occur during φ1 or φ2.
3. The data bus is only guaranteed to be in 3-state OFF at the time shown.
4. HOLD is acknowledged during RESET, causing HLDA to go active and the appropriate pins to float. If HOLD remains active while RESET goes inactive, the 80286 remains in HOLD state and will not perform any bus accesses until HOLD is de-activated.

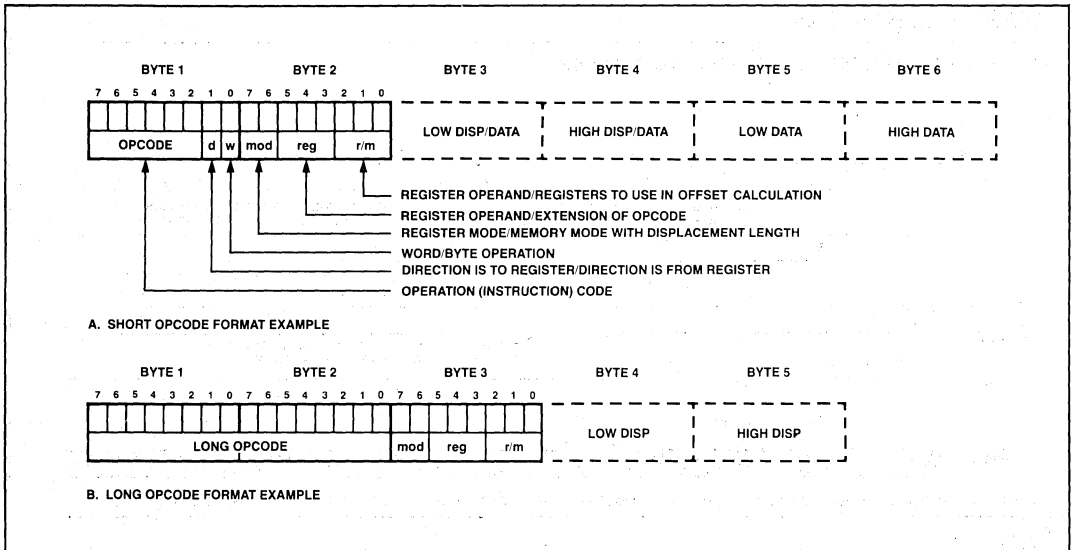


Figure 35. 80286 Instruction Format Examples

80286 INSTRUCTION SET SUMMARY

Instruction Timing Notes

The instruction clock counts listed below establish the maximum execution rate of the 80286. With no delays in bus cycles, the actual clock count of an 80286 program will average 5% more than the calculated clock count, due to instruction sequences which execute faster than they can be fetched from memory.

To calculate elapsed times for instruction sequences, multiply the sum of all instruction clock counts, as listed in the table below, by the processor clock period. An 8 MHz processor clock has a clock period of 125 nanoseconds and requires an 80286 system clock (CLK input) of 16 MHz.

Instruction Clock Count Assumptions

1. The instruction has been prefetched, decoded, and is ready for execution. Control transfer instruction clock counts include all time required to fetch, decode, and prepare the next instruction for execution.
2. Bus cycles do not require wait states.
3. There are no processor extension data transfer or local bus HOLD requests.
4. No exceptions occur during instruction execution.

Instruction Set Summary Notes

Addressing displacements selected by the MOD field are not shown. If necessary they appear after the instruction fields shown.

Above/below refers to unsigned value

Greater refers to positive signed value

Less refers to less positive (more negative) signed values

if d = 1 then to register; if d = 0 then from register

if w = 1 then word instruction; if w = 0 then byte instruction

if s = 0 then 16-bit immediate data form the operand

if s = 1 then an immediate data byte is sign-extended to form the 16-bit operand

x don't care

z used for string primitives for comparison with ZF FLAG

If two clock counts are given, the smaller refers to a register operand and the larger refers to a memory operand

* = add one clock if offset calculation requires summing 3 elements

n = number of times repeated

m = number of bytes of code in next instruction

Level (L)—Lexical nesting level of the procedure

The following comments describe possible exceptions, side effects, and allowed usage for instructions in both operating modes of the 80286.

REAL ADDRESS MODE ONLY

1. This is a protected mode instruction. Attempted execution in real address mode will result in an undefined opcode exception (6).
2. A segment overrun exception (13) will occur if a word operand reference at offset FFFF(H) is attempted.
3. This instruction may be executed in real address mode to initialize the CPU for protected mode.
4. The IOPL and NT fields will remain 0.
5. Processor extension segment overrun interrupt (9) will occur if the operand exceeds the segment limit.

EITHER MODE

6. An exception may occur, depending on the value of the operand.
7. $\overline{\text{LOCK}}$ is automatically asserted regardless of the presence or absence of the LOCK instruction prefix.
8. $\overline{\text{LOCK}}$ does not remain active between all operand transfers.

PROTECTED VIRTUAL ADDRESS MODE ONLY

9. A general protection exception (13) will occur if the memory operand can not be used due to either a segment limit or access rights violation. If a stack segment limit is violated, a stack segment overrun exception (12) occurs.
10. For segment load operations, the CPL, RPL, and DPL must agree with privilege rules to avoid an exception. The segment must be present to avoid a

not-present exception (11). If the SS register is the destination, and a segment not-present violation occurs, a stack exception (12) occurs.

11. All segment descriptor accesses in the GDT or LDT made by this instruction will automatically assert $\overline{\text{LOCK}}$ to maintain descriptor integrity in multiprocessor systems.
12. JMP, CALL, INT, RET, IRET instructions referring to another code segment will cause a general protection exception (13) if any privilege rule is violated.
13. A general protection exception (13) occurs if $\text{CPL} \neq 0$.
14. A general protection exception (13) occurs if $\text{CPL} > \text{IOPL}$.
15. The IF field of the flag word is not updated if $\text{CPL} > \text{IOPL}$. The IOPL field is updated only if $\text{CPL} = 0$.
16. Any violation of privilege rules as applied to the selector operand do not cause a protection exception; rather, the instruction does not return a result and the zero flag is cleared.
17. If the starting address of the memory operand violates a segment limit, or an invalid access is attempted, a general protection exception (13) will occur before the ESC instruction is executed. A stack segment overrun exception (12) will occur if the stack limit is violated by the operand's starting address. If a segment limit is violated during an attempted data transfer then a processor extension segment overrun exception (9) occurs.
18. The destination of an INT, JMP, CALL, RET or IRET instruction must be in the defined limit of a code segment or a general protection exception (13) will occur.

80286 INSTRUCTION SET SUMMARY

| FUNCTION | FORMAT | CLOCK COUNT | | COMMENTS | |
|-------------------------------------|--|-------------------|--------------------------------|-------------------|--------------------------------|
| | | Real Address Mode | Protected Virtual Address Mode | Real Address Mode | Protected Virtual Address Mode |
| DATA TRANSFER | | | | | |
| MOV = Move: | | | | | |
| Register to Register/Memory | 1 0 0 0 1 0 0 w mod reg r/m | 2,3* | 2,3* | 2 | 9 |
| Register/memory to register | 1 0 0 0 1 0 1 w mod reg r/m | 2,5* | 2,5* | 2 | 9 |
| Immediate to register/memory | 1 1 0 0 0 1 1 w mod 0 0 0 r/m data data if w = 1 | 2,3* | 2,3* | 2 | 9 |
| Immediate to register | 1 0 1 1 w reg data data if w = 1 | 2 | 2 | | |
| Memory to accumulator | 1 0 1 0 0 0 0 w addr-low addr-high | 5 | 5 | 2 | 9 |
| Accumulator to memory | 1 0 1 0 0 0 1 w addr-low addr-high | 3 | 3 | 2 | 9 |
| Register/memory to segment register | 1 0 0 0 1 1 1 0 mod 0 reg r/m | 2,5* | 17,19* | 2 | 9,10,11 |
| Segment register to register/memory | 1 0 0 0 1 1 0 0 mod 0 reg r/m | 2,3* | 2,3* | 2 | 9 |
| PUSH = Push: | | | | | |
| Memory | 1 1 1 1 1 1 1 1 mod 1 1 0 r/m | 5* | 5* | 2 | 9 |
| Register | 0 1 0 1 0 reg | 3 | 3 | 2 | 9 |
| Segment register | 0 0 0 reg 1 1 0 | 3 | 3 | 2 | 9 |
| Immediate | 0 1 1 0 1 0 s 0 data data if s = 0 | 3 | 3 | 2 | 9 |
| PUSHA = Push All | 0 1 1 0 0 0 0 0 | 17 | 17 | 2 | 9 |
| POP = Pop: | | | | | |
| Memory | 1 0 0 0 1 1 1 1 mod 0 0 0 r/m | 5* | 5* | 2 | 9 |
| Register | 0 1 0 1 1 reg | 5 | 5 | 2 | 9 |
| Segment register | 0 0 0 reg 1 1 1 1 (reg ≠ 01) | 5 | 20 | 2 | 9,10,11 |
| POPA = Pop All | 0 1 1 0 0 0 0 1 | 19 | 19 | 2 | 9 |
| XCHG = Exchange: | | | | | |
| Register/memory with register | 1 0 0 0 0 1 1 w mod reg r/m | 3,5* | 3,5* | 2,7 | 7,9 |
| Register with accumulator | 1 0 0 1 0 reg | 3 | 3 | | |
| IN = Input from: | | | | | |
| Fixed port | 1 1 1 0 0 1 0 w port | 5 | 5 | | 14 |
| Variable port | 1 1 1 0 1 1 0 w | 5 | 5 | | 14 |
| OUT = Output to: | | | | | |
| Fixed port | 1 1 1 0 0 1 1 w port | 3 | 3 | | 14 |
| Variable port | 1 1 1 0 1 1 1 w | 3 | 3 | | 14 |
| XLAT = Translate byte to AL | 1 1 0 1 0 1 1 1 | 5 | 5 | | 9 |
| LEA = Load EA to register | 1 0 0 0 1 1 0 1 mod reg r/m | 3* | 3* | | |
| LDS = Load pointer to DS | 1 1 0 0 0 1 0 1 mod reg r/m (mod ≠ 11) | 7* | 21* | 2 | 9,10,11 |
| LES = Load pointer to ES | 1 1 0 0 0 1 0 0 mod reg r/m (mod ≠ 11) | 7* | 21* | 2 | 9,10,11 |
| LAHF = Load AH with flags | 1 0 0 1 1 1 1 1 | 2 | 2 | | |
| SAHF = Store AH into flags | 1 0 0 1 1 1 1 0 | 2 | 2 | | |
| PUSHF = Push flags | 1 0 0 1 1 1 0 0 | 3 | 3 | 2 | 9 |
| POPF = Pop flags | 1 0 0 1 1 1 0 1 | 5 | 5 | 2,4 | 9,15 |

Shaded areas indicate instructions not available in iAPX 86, 88 microsystems.

80286 INSTRUCTION SET SUMMARY (Continued)

| FUNCTION | FORMAT | CLOCK COUNT | | COMMENTS | | | | | | |
|---|--|-------------------|--------------------------------|-------------------|--------------------------------|-------------------|--------|--------|---|---|
| | | Real Address Mode | Protected Virtual Address Mode | Real Address Mode | Protected Virtual Address Mode | | | | | |
| ARITHMETIC | | | | | | | | | | |
| ADD = Add: | | | | | | | | | | |
| Reg/memory with register to either | <table border="1"><tr><td>0 0 0 0 0 d w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 0 0 0 0 d w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | |
| 0 0 0 0 0 d w | mod reg | r/m | | | | | | | | |
| Immediate to register/memory | <table border="1"><tr><td>1 0 0 0 0 s w</td><td>mod 0 0 0</td><td>r/m</td><td>data</td><td>data if s w = 0 1</td></tr></table> | 1 0 0 0 0 s w | mod 0 0 0 | r/m | data | data if s w = 0 1 | 3,7* | 3,7* | 2 | 9 |
| 1 0 0 0 0 s w | mod 0 0 0 | r/m | data | data if s w = 0 1 | | | | | | |
| Immediate to accumulator | <table border="1"><tr><td>0 0 0 0 1 0 w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 0 0 0 1 0 w | data | data if w = 1 | 3 | 3 | | | | |
| 0 0 0 0 1 0 w | data | data if w = 1 | | | | | | | | |
| ADC = Add with carry: | | | | | | | | | | |
| Reg/memory with register to either | <table border="1"><tr><td>0 0 0 1 0 d w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 0 0 1 0 d w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | |
| 0 0 0 1 0 d w | mod reg | r/m | | | | | | | | |
| Immediate to register/memory | <table border="1"><tr><td>1 0 0 0 0 s w</td><td>mod 0 1 0</td><td>r/m</td><td>data</td><td>data if s w = 0 1</td></tr></table> | 1 0 0 0 0 s w | mod 0 1 0 | r/m | data | data if s w = 0 1 | 3,7* | 3,7* | 2 | 9 |
| 1 0 0 0 0 s w | mod 0 1 0 | r/m | data | data if s w = 0 1 | | | | | | |
| Immediate to accumulator | <table border="1"><tr><td>0 0 0 1 0 1 0 w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 0 0 1 0 1 0 w | data | data if w = 1 | 3 | 3 | | | | |
| 0 0 0 1 0 1 0 w | data | data if w = 1 | | | | | | | | |
| INC = Increment: | | | | | | | | | | |
| Register/memory | <table border="1"><tr><td>1 1 1 1 1 1 1 w</td><td>mod 0 0 0</td><td>r/m</td></tr></table> | 1 1 1 1 1 1 1 w | mod 0 0 0 | r/m | 2,7* | 2,7* | 2 | 9 | | |
| 1 1 1 1 1 1 1 w | mod 0 0 0 | r/m | | | | | | | | |
| Register | <table border="1"><tr><td>0 1 0 0 0</td><td>reg</td></tr></table> | 0 1 0 0 0 | reg | 2 | 2 | | | | | |
| 0 1 0 0 0 | reg | | | | | | | | | |
| SUB = Subtract: | | | | | | | | | | |
| Reg/memory and register to either | <table border="1"><tr><td>0 0 1 0 1 d w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 0 1 0 1 d w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | |
| 0 0 1 0 1 d w | mod reg | r/m | | | | | | | | |
| Immediate from register/memory | <table border="1"><tr><td>1 0 0 0 0 s w</td><td>mod 1 0 1</td><td>r/m</td><td>data</td><td>data if s w = 0 1</td></tr></table> | 1 0 0 0 0 s w | mod 1 0 1 | r/m | data | data if s w = 0 1 | 3,7* | 3,7* | 2 | 9 |
| 1 0 0 0 0 s w | mod 1 0 1 | r/m | data | data if s w = 0 1 | | | | | | |
| Immediate from accumulator | <table border="1"><tr><td>0 0 1 0 1 1 0 w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 0 1 0 1 1 0 w | data | data if w = 1 | 3 | 3 | | | | |
| 0 0 1 0 1 1 0 w | data | data if w = 1 | | | | | | | | |
| SBB = Subtract with borrow: | | | | | | | | | | |
| Reg/memory and register to either | <table border="1"><tr><td>0 0 0 1 1 d w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 0 0 1 1 d w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | |
| 0 0 0 1 1 d w | mod reg | r/m | | | | | | | | |
| Immediate from register/memory | <table border="1"><tr><td>1 0 0 0 0 s w</td><td>mod 0 1 1</td><td>r/m</td><td>data</td><td>data if s w = 0 1</td></tr></table> | 1 0 0 0 0 s w | mod 0 1 1 | r/m | data | data if s w = 0 1 | 3,7* | 3,7* | 2 | 9 |
| 1 0 0 0 0 s w | mod 0 1 1 | r/m | data | data if s w = 0 1 | | | | | | |
| Immediate from accumulator | <table border="1"><tr><td>0 0 0 1 1 1 0 w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 0 0 1 1 1 0 w | data | data if w = 1 | 3 | 3 | | | | |
| 0 0 0 1 1 1 0 w | data | data if w = 1 | | | | | | | | |
| DEC = Decrement: | | | | | | | | | | |
| Register/memory | <table border="1"><tr><td>1 1 1 1 1 1 1 w</td><td>mod 0 0 1</td><td>r/m</td></tr></table> | 1 1 1 1 1 1 1 w | mod 0 0 1 | r/m | 2,7* | 2,7* | 2 | 9 | | |
| 1 1 1 1 1 1 1 w | mod 0 0 1 | r/m | | | | | | | | |
| Register | <table border="1"><tr><td>0 1 0 0 1</td><td>reg</td></tr></table> | 0 1 0 0 1 | reg | 2 | 2 | | | | | |
| 0 1 0 0 1 | reg | | | | | | | | | |
| CMP = Compare: | | | | | | | | | | |
| Register/memory with register | <table border="1"><tr><td>0 0 1 1 1 0 1 w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 0 1 1 1 0 1 w | mod reg | r/m | 2,6* | 2,6* | 2 | 9 | | |
| 0 0 1 1 1 0 1 w | mod reg | r/m | | | | | | | | |
| Register with register/memory | <table border="1"><tr><td>0 0 1 1 1 0 0 w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 0 1 1 1 0 0 w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | |
| 0 0 1 1 1 0 0 w | mod reg | r/m | | | | | | | | |
| Immediate with register/memory | <table border="1"><tr><td>1 0 0 0 0 s w</td><td>mod 1 1 1</td><td>r/m</td><td>data</td><td>data if s w = 0 1</td></tr></table> | 1 0 0 0 0 s w | mod 1 1 1 | r/m | data | data if s w = 0 1 | 3,6* | 3,6* | 2 | 9 |
| 1 0 0 0 0 s w | mod 1 1 1 | r/m | data | data if s w = 0 1 | | | | | | |
| Immediate with accumulator | <table border="1"><tr><td>0 0 1 1 1 1 0 w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 0 1 1 1 1 0 w | data | data if w = 1 | 3 | 3 | | | | |
| 0 0 1 1 1 1 0 w | data | data if w = 1 | | | | | | | | |
| NEG = Change sign | <table border="1"><tr><td>1 1 1 1 0 1 1 w</td><td>mod 0 1 1</td><td>r/m</td></tr></table> | 1 1 1 1 0 1 1 w | mod 0 1 1 | r/m | 2 | 7* | 2 | 7 | | |
| 1 1 1 1 0 1 1 w | mod 0 1 1 | r/m | | | | | | | | |
| AAA = ASCII adjust for add | <table border="1"><tr><td>0 0 1 1 0 1 1 1</td></tr></table> | 0 0 1 1 0 1 1 1 | 3 | 3 | | | | | | |
| 0 0 1 1 0 1 1 1 | | | | | | | | | | |
| DAA = Decimal adjust for add | <table border="1"><tr><td>0 0 1 0 0 1 1 1</td></tr></table> | 0 0 1 0 0 1 1 1 | 3 | 3 | | | | | | |
| 0 0 1 0 0 1 1 1 | | | | | | | | | | |
| AAS = ASCII adjust for subtract | <table border="1"><tr><td>0 0 1 1 1 1 1 1</td></tr></table> | 0 0 1 1 1 1 1 1 | 3 | 3 | | | | | | |
| 0 0 1 1 1 1 1 1 | | | | | | | | | | |
| DAS = Decimal adjust for subtract | <table border="1"><tr><td>0 0 1 0 1 1 1 1</td></tr></table> | 0 0 1 0 1 1 1 1 | 3 | 3 | | | | | | |
| 0 0 1 0 1 1 1 1 | | | | | | | | | | |
| MUL = Multiply (unsigned): | | | | | | | | | | |
| Register-Byte | <table border="1"><tr><td>1 1 1 1 0 1 1 w</td><td>mod 1 0 0</td><td>r/m</td></tr></table> | 1 1 1 1 0 1 1 w | mod 1 0 0 | r/m | 13 | 13 | | | | |
| 1 1 1 1 0 1 1 w | mod 1 0 0 | r/m | | | | | | | | |
| Register-Word | | 21 | 21 | | | | | | | |
| Memory-Byte | | 16* | 16* | 2 | 9 | | | | | |
| Memory-Word | | 24* | 24* | 2 | 9 | | | | | |
| IMUL = Integer multiply (signed): | | | | | | | | | | |
| Register-Byte | <table border="1"><tr><td>1 1 1 1 0 1 1 w</td><td>mod 1 0 1</td><td>r/m</td></tr></table> | 1 1 1 1 0 1 1 w | mod 1 0 1 | r/m | 13 | 13 | | | | |
| 1 1 1 1 0 1 1 w | mod 1 0 1 | r/m | | | | | | | | |
| Register-Word | | 21 | 21 | | | | | | | |
| Memory-Byte | | 16* | 16* | 2 | 9 | | | | | |
| Memory-Word | | 24* | 24* | 2 | 9 | | | | | |
| IMUL = Integer immediate multiply (signed) | <table border="1"><tr><td>0 1 1 0 1 0 s 1</td><td>mod reg</td><td>r/m</td><td>data</td><td>data if s = 0</td></tr></table> | 0 1 1 0 1 0 s 1 | mod reg | r/m | data | data if s = 0 | 21,24* | 21,24* | 2 | 9 |
| 0 1 1 0 1 0 s 1 | mod reg | r/m | data | data if s = 0 | | | | | | |
| DIV = Divide (unsigned): | | | | | | | | | | |
| Register-Byte | <table border="1"><tr><td>1 1 1 1 0 1 1 w</td><td>mod 1 1 0</td><td>r/m</td></tr></table> | 1 1 1 1 0 1 1 w | mod 1 1 0 | r/m | 14 | 14 | 6 | 6 | | |
| 1 1 1 1 0 1 1 w | mod 1 1 0 | r/m | | | | | | | | |
| Register-Word | | 22 | 22 | 6 | 6 | | | | | |
| Memory-Byte | | 17* | 17* | 2,6 | 6,9 | | | | | |
| Memory-Word | | 25* | 25* | 2,6 | 6,9 | | | | | |

Shaded areas indicate instructions not available in iAPX 86, 88 microsystems.

80286 INSTRUCTION SET SUMMARY (Continued)

| FUNCTION | FORMAT | CLOCK COUNT | | COMMENTS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|-------------------|--------------------------------|-------------------|--------------------------------|---|----------|---------------|----------|---------------|------|---------------|----------|----------|---|---|----|----|-------|-----|--|--|--|--|-------|-----|--|--|--|--|-------|-----|--|--|--|--|-------|---------|--|--|--|--|-------|-----|--|--|--|--|-------|-----|--|--|--|
| | | Real Address Mode | Protected Virtual Address Mode | Real Address Mode | Protected Virtual Address Mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ARITHMETIC (Continued): | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| IDIV = Integer divide (signed): | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>1</td><td>w</td><td>mod 111</td><td>r/m</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 1 | 1 | w | mod 111 | r/m | 17 | 17 | 6 | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 1 | 1 | 0 | 1 | 1 | w | mod 111 | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Register-Byte | | 25 | 25 | 6 | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Register-Word | | 20* | 20* | 2,6 | 6,9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Memory-Byte | | 28* | 28* | 2,6 | 6,9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Memory-Word | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AAM = ASCII adjust for multiply | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td></tr></table> | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 16 | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AAD = ASCII adjust for divide | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td></tr></table> | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 14 | 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CBW = Convert byte to word | <table border="1"><tr><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td></tr></table> | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 2 | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CWD = Convert word to double word | <table border="1"><tr><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td></tr></table> | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 2 | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LOGIC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shift/Rotate Instructions: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Register/Memory by 1 | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>w</td><td>mod TTT</td><td>r/m</td></tr></table> | 1 | 1 | 0 | 1 | 0 | 0 | 0 | w | mod TTT | r/m | 2,7* | 2,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 1 | 0 | 0 | 0 | w | mod TTT | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Register/Memory by CL | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>w</td><td>mod TTT</td><td>r/m</td></tr></table> | 1 | 1 | 0 | 1 | 0 | 0 | 1 | w | mod TTT | r/m | 5+n,8+n* | 5+n,8+n* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 1 | 0 | 0 | 1 | w | mod TTT | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Register/Memory by Count | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>w</td><td>mod TTT</td><td>r/m</td><td>count</td></tr></table> | 1 | 1 | 0 | 0 | 0 | 0 | 0 | w | mod TTT | r/m | count | 5+n,8+n* | 5+n,8+n* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 0 | 0 | 0 | 0 | w | mod TTT | r/m | count | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="0"> <tr> <td></td> <td>TTT</td> <td>Instruction</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0 0 0</td> <td>ROL</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0 0 1</td> <td>ROR</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0 1 0</td> <td>RCL</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0 1 1</td> <td>RCR</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>1 0 0</td> <td>SHL/SAL</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>1 0 1</td> <td>SHR</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>1 1 1</td> <td>SAR</td> <td></td> <td></td> <td></td> </tr> </table> | | | | | | | TTT | Instruction | | | | | 0 0 0 | ROL | | | | | 0 0 1 | ROR | | | | | 0 1 0 | RCL | | | | | 0 1 1 | RCR | | | | | 1 0 0 | SHL/SAL | | | | | 1 0 1 | SHR | | | | | 1 1 1 | SAR | | | |
| | TTT | Instruction | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0 0 0 | ROL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0 0 1 | ROR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0 1 0 | RCL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0 1 1 | RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 0 0 | SHL/SAL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 0 1 | SHR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 1 1 | SAR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AND = And: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reg/memory and register to either | <table border="1"><tr><td>0</td><td>0</td><td>1</td><td>0</td><td>0</td><td>d</td><td>w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 | 0 | 1 | 0 | 0 | d | w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | 0 | 0 | d | w | mod reg | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate to register/memory | <table border="1"><tr><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>w</td><td>mod 1*00</td><td>r/m</td><td>data</td><td>data if w = 1</td></tr></table> | 1 | 0 | 0 | 0 | 0 | 0 | w | mod 1*00 | r/m | data | data if w = 1 | 3,7* | 3,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 0 | 0 | 0 | w | mod 1*00 | r/m | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate to accumulator | <table border="1"><tr><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 | 0 | 1 | 0 | 1 | 0 | w | data | data if w = 1 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | 0 | 1 | 0 | w | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TEST = And function to flags, no result: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Register/memory and register | <table border="1"><tr><td>1</td><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>w</td><td>mod reg</td><td>r/m</td></tr></table> | 1 | 0 | 0 | 0 | 1 | 0 | w | mod reg | r/m | 2,6* | 2,6* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 0 | 1 | 0 | w | mod reg | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate data and register/memory | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>w</td><td>mod 000</td><td>r/m</td><td>data</td><td>data if w = 1</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 1 | w | mod 000 | r/m | data | data if w = 1 | 3,6* | 3,6* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 1 | 1 | 0 | 1 | w | mod 000 | r/m | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate data and accumulator | <table border="1"><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>w</td><td>data</td><td>data if w = 1</td></tr></table> | 1 | 0 | 1 | 0 | 1 | 0 | w | data | data if w = 1 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 1 | 0 | w | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OR = Or: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reg/memory and register to either | <table border="1"><tr><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>d</td><td>w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 | 0 | 0 | 1 | 0 | d | w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 0 | 1 | 0 | d | w | mod reg | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate to register/memory | <table border="1"><tr><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>w</td><td>mod 001</td><td>r/m</td><td>data</td><td>data if w = 1</td></tr></table> | 1 | 0 | 0 | 0 | 0 | 0 | w | mod 001 | r/m | data | data if w = 1 | 3,7* | 3,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 0 | 0 | 0 | w | mod 001 | r/m | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate to accumulator | <table border="1"><tr><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 | 0 | 0 | 1 | 1 | 0 | w | data | data if w = 1 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 0 | 1 | 1 | 0 | w | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| XOR = Exclusive or: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reg/memory and register to either | <table border="1"><tr><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>d</td><td>w</td><td>mod reg</td><td>r/m</td></tr></table> | 0 | 0 | 1 | 1 | 0 | d | w | mod reg | r/m | 2,7* | 2,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | 1 | 0 | d | w | mod reg | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate to register/memory | <table border="1"><tr><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>w</td><td>mod 110</td><td>r/m</td><td>data</td><td>data if w = 1</td></tr></table> | 1 | 0 | 0 | 0 | 0 | 0 | w | mod 110 | r/m | data | data if w = 1 | 3,7* | 3,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 0 | 0 | 0 | w | mod 110 | r/m | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Immediate to accumulator | <table border="1"><tr><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>w</td><td>data</td><td>data if w = 1</td></tr></table> | 0 | 0 | 1 | 1 | 0 | 1 | w | data | data if w = 1 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | 1 | 0 | 1 | w | data | data if w = 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NOT = Invert register/memory | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>w</td><td>mod 010</td><td>r/m</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 1 | w | mod 010 | r/m | 2,7* | 2,7* | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 1 | 1 | 0 | 1 | w | mod 010 | r/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STRING MANIPULATION: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MOVS = Move byte/word | <table border="1"><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>w</td></tr></table> | 1 | 0 | 1 | 0 | 0 | 1 | 0 | w | 5 | 5 | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 0 | 1 | 0 | w | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CMPS B/W = Compare byte/word | <table border="1"><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>w</td></tr></table> | 1 | 0 | 1 | 0 | 0 | 1 | 1 | w | 8 | 8 | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 0 | 1 | 1 | w | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SCAS = Scan byte/word | <table border="1"><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td><td>1</td><td>w</td></tr></table> | 1 | 0 | 1 | 0 | 1 | 1 | 1 | w | 7 | 7 | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 1 | 1 | 1 | w | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LODS = Load byte/wd to AL/AX | <table border="1"><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td><td>0</td><td>w</td></tr></table> | 1 | 0 | 1 | 0 | 1 | 1 | 0 | w | 5 | 5 | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 1 | 1 | 0 | w | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STOS = Stor byte/wd from AL/A | <table border="1"><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>w</td></tr></table> | 1 | 0 | 1 | 0 | 1 | 0 | 1 | w | 3 | 3 | 2 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 1 | 0 | 1 | w | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| INS = Input byte/wd from DX port | <table border="1"><tr><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>1</td><td>0</td><td>w</td></tr></table> | 0 | 1 | 1 | 0 | 1 | 1 | 0 | w | 5 | 5 | 2 | 9,14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 1 | 0 | 1 | 1 | 0 | w | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OUTS = Output byte/wd to DX port | <table border="1"><tr><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>1</td><td>1</td><td>w</td></tr></table> | 0 | 1 | 1 | 0 | 1 | 1 | 1 | w | 5 | 5 | 2 | 9,14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 1 | 0 | 1 | 1 | 1 | w | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Shaded areas indicate instructions not available in iAPX 86, 88 microsystems.

80286 INSTRUCTION SET SUMMARY (Continued)

| FUNCTION | FORMAT | CLOCK COUNT | | COMMENTS | | | | | | | | | | | | | | | | | |
|---|--|-------------------|--------------------------------|-------------------|--------------------------------|---|---|---|---|----------------|--------|------------------|--------------|------------|---|---|---|----------------|----------------|-----|--------------|
| | | Real Address Mode | Protected Virtual Address Mode | Real Address Mode | Protected Virtual Address Mode | | | | | | | | | | | | | | | | |
| STRING MANIPULATION (Continued): | | | | | | | | | | | | | | | | | | | | | |
| Repeated by count in CX | | | | | | | | | | | | | | | | | | | | | |
| MOVS = Move string | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td></tr><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>w</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | w | 5 + 4n | 5 + 4n | 2 | 9 |
| 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 0 | 1 | 0 | w | | | | | | | | | | | | | | |
| CMPS = Compare string | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>z</td></tr><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>w</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 0 | 1 | z | 1 | 0 | 1 | 0 | 0 | 1 | 1 | w | 5 + 9n | 5 + 9n | 2,8 | 8,9 |
| 1 | 1 | 1 | 1 | 0 | 0 | 1 | z | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 0 | 1 | 1 | w | | | | | | | | | | | | | | |
| SCAS = Scan string | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>z</td></tr><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td><td>1</td><td>w</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 0 | 1 | z | 1 | 0 | 1 | 0 | 1 | 1 | 1 | w | 5 + 8n | 5 + 8n | 2,8 | 8,9 |
| 1 | 1 | 1 | 1 | 0 | 0 | 1 | z | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 1 | 1 | 1 | w | | | | | | | | | | | | | | |
| LODS = Load string | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td></tr><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td><td>1</td><td>w</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 1 | w | 5 + 4n | 5 + 4n | 2,8 | 8,9 |
| 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 1 | 1 | 1 | w | | | | | | | | | | | | | | |
| STOS = Store string | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td></tr><tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>w</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | w | 4 + 3n | 4 + 3n | 2,8 | 8,9 |
| 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 | 1 | 0 | 1 | w | | | | | | | | | | | | | | |
| INS = Input string | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td></tr><tr><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>1</td><td>0</td><td>w</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | w | 5 + 4n | 5 + 4n | 2 | 9,14 |
| 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| 0 | 1 | 1 | 0 | 1 | 1 | 0 | w | | | | | | | | | | | | | | |
| OUTS = Output string | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td></tr><tr><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>1</td><td>1</td><td>w</td></tr></table> | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | w | 5 + 4n | 5 + 4n | 2 | 9,14 |
| 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| 0 | 1 | 1 | 0 | 1 | 1 | 1 | w | | | | | | | | | | | | | | |
| CONTROL TRANSFER | | | | | | | | | | | | | | | | | | | | | |
| CALL = Call: | | | | | | | | | | | | | | | | | | | | | |
| Direct within segment | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td></tr><tr><td colspan="2">disp-low</td><td colspan="2">disp-high</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | disp-low | | disp-high | | | | | | 7 + m | 7 + m | 2 | 18 |
| 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | | | | | | | | | | | | | | |
| disp-low | | disp-high | | | | | | | | | | | | | | | | | | | |
| Register/memory indirect within segment | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td></tr><tr><td colspan="2">mod 0 1 0</td><td colspan="2">r/m</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | mod 0 1 0 | | r/m | | | | | | 7 + m, 11 + m* | 7 + m, 11 + m* | 2,8 | 8,9,18 |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | | | | |
| mod 0 1 0 | | r/m | | | | | | | | | | | | | | | | | | | |
| Direct intersegment | <table border="1"><tr><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td></tr><tr><td colspan="2">segment offset</td><td colspan="2">segment selector</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | segment offset | | segment selector | | | | | | 13 + m | 26 + m | 2 | 11,12,18 |
| 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| segment offset | | segment selector | | | | | | | | | | | | | | | | | | | |
| Protected Mode Only (Direct intersegment): | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to same privilege level | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to different privilege level, no parameters | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to different privilege level, x parameters | | | | | | | | | | | | | | | | | | | | | |
| Via TSS | | | | | | | | | | | | | | | | | | | | | |
| Via task gate | | | | | | | | | | | | | | | | | | | | | |
| Indirect intersegment | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td></tr><tr><td colspan="2">mod 0 1 1</td><td colspan="2">r/m</td><td colspan="2">(mod ≠ 11)</td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | mod 0 1 1 | | r/m | | (mod ≠ 11) | | | | 16 + m | 29 + m* | 2 | 8,9,11,12,18 |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | | | | |
| mod 0 1 1 | | r/m | | (mod ≠ 11) | | | | | | | | | | | | | | | | | |
| Protected Mode Only (Indirect intersegment): | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to same privilege level | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to different privilege level, no parameters | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to different privilege level, x parameters | | | | | | | | | | | | | | | | | | | | | |
| Via TSS | | | | | | | | | | | | | | | | | | | | | |
| Via task gate | | | | | | | | | | | | | | | | | | | | | |
| JMP = Unconditional jump: | | | | | | | | | | | | | | | | | | | | | |
| Short/long | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td></tr><tr><td colspan="2">disp-low</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | disp-low | | | | | | | | 7 + m | 7 + m | | 18 |
| 1 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | | | | | | | | | | | | | | |
| disp-low | | | | | | | | | | | | | | | | | | | | | |
| Direct within segment | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td></tr><tr><td colspan="2">disp-low</td><td colspan="2">disp-high</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | disp-low | | disp-high | | | | | | 7 + m | 7 + m | | 18 |
| 1 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | | | | | | | | | | | | | | |
| disp-low | | disp-high | | | | | | | | | | | | | | | | | | | |
| Register/memory indirect within segment | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td></tr><tr><td colspan="2">mod 1 0 0</td><td colspan="2">r/m</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | mod 1 0 0 | | r/m | | | | | | 7 + m, 11 + m* | 7 + m, 11 + m* | 2 | 9,18 |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | | | | |
| mod 1 0 0 | | r/m | | | | | | | | | | | | | | | | | | | |
| Direct intersegment | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td></tr><tr><td colspan="2">segment offset</td><td colspan="2">segment selector</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | segment offset | | segment selector | | | | | | 11 + m | 23 + m | | 11,12,18 |
| 1 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| segment offset | | segment selector | | | | | | | | | | | | | | | | | | | |
| Protected Mode Only (Direct intersegment): | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to same privilege level | | | | | | | | | | | | | | | | | | | | | |
| Via TSS | | | | | | | | | | | | | | | | | | | | | |
| Via task gate | | | | | | | | | | | | | | | | | | | | | |
| Indirect intersegment | <table border="1"><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td></tr><tr><td colspan="2">mod 1 0 1</td><td colspan="2">r/m</td><td colspan="2">(mod ≠ 11)</td><td colspan="2"></td></tr></table> | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | mod 1 0 1 | | r/m | | (mod ≠ 11) | | | | 15 + m* | 26 + m* | 2 | 8,9,11,12,18 |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | | | | |
| mod 1 0 1 | | r/m | | (mod ≠ 11) | | | | | | | | | | | | | | | | | |
| Protected Mode Only (Indirect intersegment): | | | | | | | | | | | | | | | | | | | | | |
| Via call gate to same privilege level | | | | | | | | | | | | | | | | | | | | | |
| Via TSS | | | | | | | | | | | | | | | | | | | | | |
| Via task gate | | | | | | | | | | | | | | | | | | | | | |
| RET = Return from CALL: | | | | | | | | | | | | | | | | | | | | | |
| Within segment | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td></tr></table> | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 11 + m | 11 + m | 2 | 8,9,18 | | | | | | | | |
| 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | | | | | | | | | | | | | | |
| Within seg adding immed to SP | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td></tr><tr><td colspan="2">data-low</td><td colspan="2">data-high</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | data-low | | data-high | | | | | | 11 + m | 11 + m | 2 | 8,9,18 |
| 1 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| data-low | | data-high | | | | | | | | | | | | | | | | | | | |
| Intersegment | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td></tr></table> | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 15 + m | 25 + m | 2 | 8,9,11,12,18 | | | | | | | | |
| 1 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | | | | | | | | | | | | | | |
| Intersegment adding immediate to SP | <table border="1"><tr><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td></tr><tr><td colspan="2">data-low</td><td colspan="2">data-high</td><td colspan="2"></td><td colspan="2"></td></tr></table> | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | data-low | | data-high | | | | | | 15 + m | | 2 | 8,9,11,12,18 |
| 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | | | | | | | | | | | | | | |
| data-low | | data-high | | | | | | | | | | | | | | | | | | | |
| Protected Mode Only (RET): | | | | | | | | | | | | | | | | | | | | | |
| To different privilege level | | | | | | | | | | | | | | | | | | | | | |
| | | | 55 + m | | 9,11,12,18 | | | | | | | | | | | | | | | | |

Shaded areas indicate instructions not available in iAPX 86, 88 microsystems.

80286 INSTRUCTION SET SUMMARY (Continued)

| FUNCTION | FORMAT | CLOCK COUNT | | COMMENTS | |
|---|--------------------------------------|------------------------------------|---|-------------------|--------------------------------|
| | | Real Address Mode | Protected Virtual Address Mode | Real Address Mode | Protected Virtual Address Mode |
| CONTROL TRANSFER (Continued): | | | | | |
| JE/JZ = Jump on equal/zero | 0 1 1 1 0 1 0 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JL/JNGE = Jump on less/not greater or equal | 0 1 1 1 1 1 0 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JLE/JNG = Jump on less or equal/not greater | 0 1 1 1 1 1 1 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JB/JNAE = Jump on below/not above or equal | 0 1 1 1 0 0 1 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JBE/JNA = Jump on below or equal/not above | 0 1 1 1 0 1 1 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JP/JPE = Jump on parity/parity even | 0 1 1 1 1 0 1 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JO = Jump on overflow | 0 1 1 1 0 0 0 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JS = Jump on sign | 0 1 1 1 1 0 0 0 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNE/JNZ = Jump on not equal/not zero | 0 1 1 1 0 1 0 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNL/JGE = Jump on not less/greater or equal | 0 1 1 1 1 1 0 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNLE/JG = Jump on not less or equal/greater | 0 1 1 1 1 1 1 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNB/JAE = Jump on not below/above or equal | 0 1 1 1 0 0 1 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNBE/JA = Jump on not below or equal/above | 0 1 1 1 0 1 1 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNP/JPO = Jump on not par/par odd | 0 1 1 1 1 0 1 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNO = Jump on not overflow | 0 1 1 1 0 0 0 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| JNS = Jump on not sign | 0 1 1 1 1 0 0 1 disp | 7 + m or 3 | 7 + m or 3 | | 18 |
| LOOP = Loop CX times | 1 1 1 0 0 0 1 0 disp | 8 + m or 4 | 8 + m or 4 | | 18 |
| LOOPZ/LOOPE = Loop while zero/equal | 1 1 1 0 0 0 0 1 disp | 8 + m or 4 | 8 + m or 4 | | 18 |
| LOOPNZ/LOPNE = Loop while not zero/equal | 1 1 1 0 0 0 0 0 disp | 8 + m or 4 | 8 + m or 4 | | 18 |
| JCXZ = Jump on CX zero | 1 1 1 0 0 0 1 1 disp | 8 + m or 4 | 8 + m or 4 | | 18 |
| ENTER = Enter Procedure | 1 1 0 0 1 0 0 0 data-low data-high L | | | 2,8 | 8,9 |
| L = 0 | | 11 | 11 | 2,8 | 8,9 |
| L = 1 | | 15 | 15 | 2,8 | 8,9 |
| L > 1 | | 16 + 4(L - 1) | 16 + 4(L - 1) | 2,8 | 8,9 |
| LEAVE = Leave Procedure | 1 1 0 0 1 0 0 1 | 5 | 5 | 2,8 | 8,9 |
| INT = Interrupt: | | | | | |
| Type specified | 1 1 0 0 1 1 0 1 type | 23 + m | | 2,7,8 | |
| Type 3 | 1 1 0 0 1 1 0 0 | 23 + m | | 2,7,8 | |
| INTO = Interrupt on overflow | 1 1 0 0 1 1 1 0 | 24 + m or 3 (3 if no interrupt) | (3 if no interrupt) | 2,6,8 | |
| Protected Mode Only: | | | | | |
| Via interrupt or trap gate to same privilege level | | | 40 + m | | 7,8,11,12,18 |
| Via interrupt or trap gate to fit different privilege level | | | 78 + m | | 7,8,11,12,18 |
| Via Task Gate | | | 167 + m | | 7,8,11,12,18 |
| IRET = Interrupt return | 1 1 0 0 1 1 1 1 | 17 + m | 31 + m | 2,4 | 8,9,11,12,15,18 |
| Protected Mode Only: | | | | | |
| To different privilege level | | | 55 + m | | 8,9,11,12,15,18 |
| To different task (NT = 1) | | | 169 + m | | 8,9,11,12,18 |
| BOUND = Detect value out of range | 0 1 1 0 0 0 1 0 mod reg r/m | 13* | 13* (Use INT clock count if exception 5) | 2,6 | 6,8,9,11,12,18 |

Shaded areas indicate instructions not available in iAPX 86, 88 microsystems.

80286 INSTRUCTION SET SUMMARY (Continued)

| FUNCTION | FORMAT | CLOCK COUNT | | COMMENTS | |
|--|--|-------------------|--------------------------------|-------------------|--------------------------------|
| | | Real Address Mode | Protected Virtual Address Mode | Real Address Mode | Protected Virtual Address Mode |
| PROCESSOR CONTROL | | | | | |
| CLC = Clear carry | 1 1 1 1 1 0 0 0 | 2 | 2 | | |
| CMC = Complement carry | 1 1 1 1 0 1 0 1 | 2 | 2 | | |
| STC = Set carry | 1 1 1 1 1 0 0 1 | 2 | 2 | | |
| CLD = Clear direction | 1 1 1 1 1 1 0 0 | 2 | 2 | | |
| STD = Set direction | 1 1 1 1 1 1 0 1 | 2 | 2 | | |
| CLI = Clear interrupt | 1 1 1 1 1 0 1 0 | 3 | 3 | | 14 |
| STI = Set interrupt | 1 1 1 1 1 0 1 1 | 2 | 2 | | 14 |
| HLT = Halt | 1 1 1 1 0 1 0 0 | 2 | 2 | | 13 |
| WAIT = Wait | 1 0 0 1 1 0 1 1 | 3 | 3 | | |
| LOCK = Bus lock prefix | 1 1 1 1 0 0 0 0 | 0 | 0 | | 14 |
| CLTS = Clear task switched flag | 0 0 0 0 1 1 1 1 0 0 0 0 0 1 1 0 | 2 | 2 | 3 | 13 |
| ESC = Processor Extension Escape | 1 1 0 1 1 T T T mod LLL r/m (TTT LLL are opcode to processor extension) | 9-20* | 9-20* | 5,8 | 8,17 |
| SEG = Segment Override Prefix | 001 reg 110 | 0 | 0 | | |
| PROTECTION CONTROL | | | | | |
| LGDT = Load global descriptor table register | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 1 mod 010 r/m | 11* | 11* | 2,3 | 9,13 |
| SGDT = Store global descriptor table register | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 1 mod 000 r/m | 11* | 11* | 2,3 | 9 |
| LIDT = Load interrupt descriptor table register | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 1 mod 011 r/m | 12* | 12* | 2,3 | 9,13 |
| SIDT = Store interrupt descriptor table register | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 1 mod 001 r/m | 12* | 12* | 2,3 | 9 |
| LLDT = Load local descriptor table register from register memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 0 mod 010 r/m | | 17,19* | 1 | 9,11,13 |
| SLDT = Store local descriptor table register to register memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 0 mod 000 r/m | | 2,3* | 1 | 9 |
| LTR = Load task register from register/memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 0 mod 011 r/m | | 17,19* | 1 | 9,11,13 |
| STR = Store task register to register memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 0 mod 001 r/m | | 2,3* | 1 | 9 |
| LMSW = Load machine status word from register/memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 1 mod 110 r/m | 3,6* | 3,6* | 2,3 | 9,13 |
| SMSW = Store machine status word | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 1 mod 100 r/m | 2,3* | 2,3* | 2,3 | 9 |
| LAR = Load access rights from register/memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 1 0 mod reg r/m | | 14,16* | 1 | 9,11,16 |
| LSL = Load segment limit from register/memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 1 1 mod reg r/m | | 14,16* | 1 | 9,11,16 |
| ARPL = Adjust requested privilege level: from register/memory | 0 1 1 0 0 0 1 1 mod reg r/m | | 10*,11* | 2 | 8,9 |
| VERR = Verify read access: register/memory | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 0 mod 100 r/m | | 14,16* | 1 | 9,11,16 |
| VERR = Verify write access: | 0 0 0 0 1 1 1 1 0 0 0 0 0 0 0 0 mod 101 r/m | | 14,16* | 1 | 9,11,16 |

Shaded areas indicate instructions not available in iAPX 86, 88 microsystems.

Footnotes

The effective Address (EA) of the memory operand is computed according to the mod and r/m fields:

- if mod = 11 then r/m is treated as a REG field
- if mod = 00 then DISP = 0*, disp-low and disp-high are absent
- if mod = 01 then DISP = disp-low sign-extended to 16-bits, disp-high is absent
- if mod = 10 then DISP = disp-high: disp-low
- if r/m = 000 then EA = (BX) + (SI) + DISP
- if r/m = 001 then EA = (BX) + (DI) + DISP
- if r/m = 010 then EA = (BP) + (SI) + DISP
- if r/m = 011 then EA = (BP) + (DI) + DISP
- if r/m = 100 then EA = (SI) + DISP
- if r/m = 101 then EA = (DI) + DISP
- if r/m = 110 then EA = (BP) + DISP*
- if r/m = 111 then EA = (BX) + DISP

DISP follows 2nd byte of instruction (before data if required)

*except if mod = 00 and r/m = 110 then EA = disp-high: disp-low.

REG is assigned according to the following table:

| 16-Bit (w = 1) | 8-Bit (w = 0) |
|----------------|---------------|
| 000 AX | 000 AL |
| 001 CX | 001 CL |
| 010 DX | 010 DL |
| 011 BX | 011 BL |
| 100 SP | 100 AH |
| 101 BP | 101 CH |
| 110 SI | 110 DH |
| 111 DI | 111 BH |

The physical addresses of all operands addressed by the BP register are computed using the SS segment register. The physical addresses of the destination operands of the string primitive operations (those addressed by the DI register) are computed using the ES segment, which may not be overridden.

SEGMENT OVERRIDE PREFIX

0 0 1 reg 1 1 0

reg is assigned according to the following:

| reg | Segment Register |
|-----|------------------|
| 00 | ES |
| 01 | CS |
| 10 | SS |
| 11 | DS |

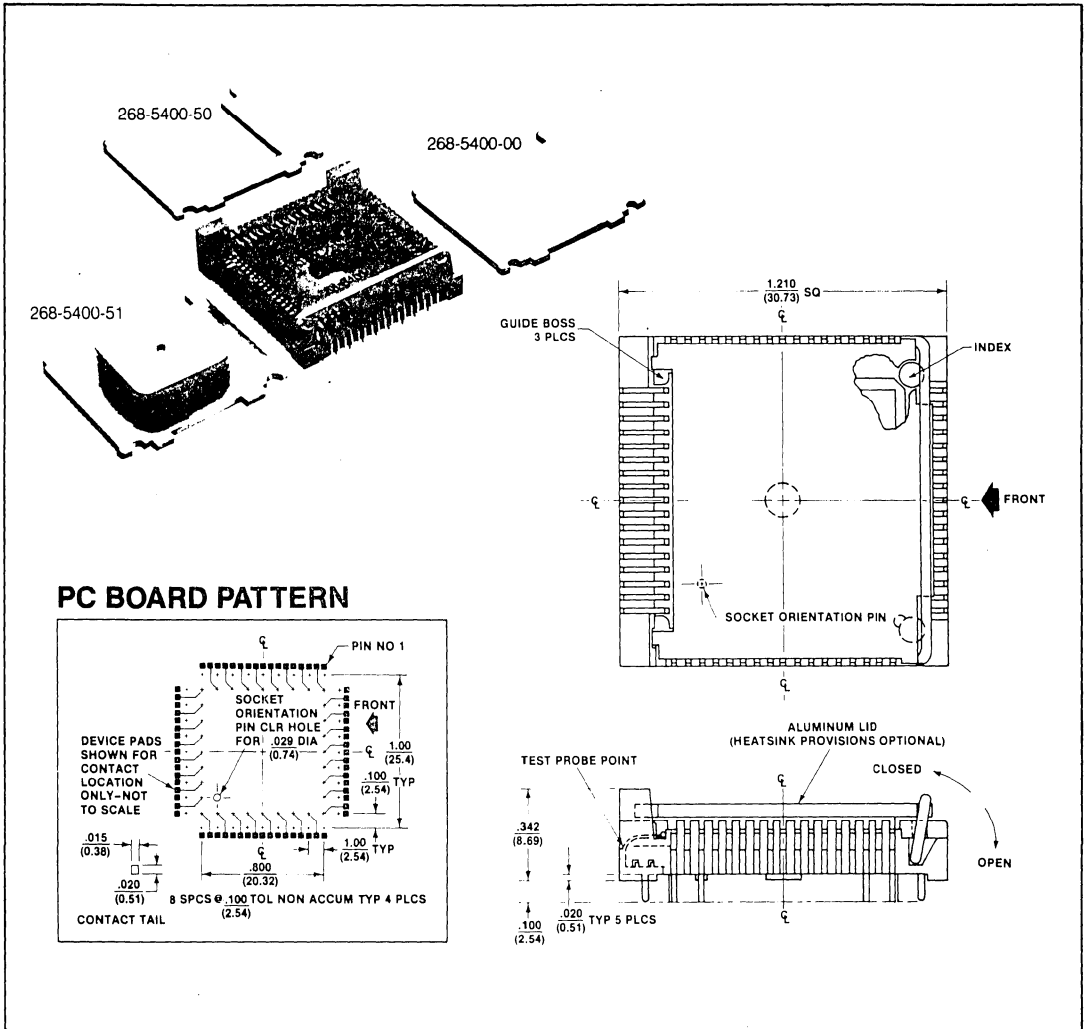


Figure 36. Textool 68 Lead Chip Carrier Socket



Appendix
iAPX 86/88 Software
Compatibility Considerations

D

APPENDIX D

Contents

List of Minor Differences Between
iAPX 86 and iAPX 286 (Real Mode) D-1

APPENDIX D

iAPX 86/88 SOFTWARE COMPATIBILITY CONSIDERATIONS

In general, the real address mode iAPX 286 will correctly execute ROM-based iAPX 86/88 software. The following is a list of the minor differences between iAPX 86 and iAPX 286 (Real mode).

1. Add Six Interrupt Vectors.

The iAPX 286 adds six interrupts which arise only if the iAPX 86/88 program has a hidden bug. These interrupts occur only for instructions which were undefined on the 8086/8088 or if a segment wrap-around is attempted. It is recommended that you add an interrupt handler to the iAPX 86/88 software that is to be run on the iAPX 286, which will treat these interrupts as invalid operations.

This additional software does not significantly effect the existing iAPX 86/88 software because the interrupts do not normally occur and should not already have been used since they are in the interrupt group reserved by Intel. Table D-1 describes the new iAPX 286 interrupts.

2. Do not Rely on iAPX 86/88 Instruction Clock Counts.

The iAPX 286 takes fewer clocks for most instructions than the iAPX 86/88. The areas to look into are delays between I/O operations, and assumed delays in iAPX 86/88 operating in parallel with an 8087.

3. Divide Exceptions Point at the DIV Instruction.

Any interrupt on the iAPX 286 will always leave the saved CS:IP value pointing at the beginning of the instruction that failed (including prefixes). On

Table D-1. New iAPX 286 Interrupts

| Interrupt Number | Function |
|------------------|---|
| 5 | A BOUND instruction was executed with a register value outside the two limit values. |
| 6 | An undefined opcode was encountered. |
| 7 | The EM bit in the MSW has been set and an ESC instruction was executed. This interrupt will also occur on WAIT instructions if TS is set. |
| 8 | The interrupt table limit was changed by the LIDT instruction to a value between 20H and 42H. The default limit after reset is 3FFH, enough for all 256 interrupts. |
| 9 | A processor extension data transfer exceeded offset OFFFFH in a segment. This interrupt handler <i>must</i> execute FNINIT before <i>any</i> ESC or WAIT instruction is executed. |
| 13 | Segment wraparound was attempted by a word operation at offset OFFFFH. |
| 16 | When 80286 attempted to execute a coprocessor instruction <u>ERROR</u> pin indicated an unmasked exception from previous coprocessor instruction. |

the iAPX 86/88, the CS:IP value saved for a divide exception points at the next instruction.

4. Use Interrupt 16 for Numeric Exceptions.

Any iAPX 286/20 system *must* use interrupt vector 16 for the numeric error

interrupt. If an iAPX 86/20 or iAPX 88/20 system uses another vector for the 8087 interrupt, both vectors should point at the numeric error interrupt handler.

5. Numeric Exception Handlers Should allow Prefixes.

The saved CS:IP value in the NPX environment save area will point at any leading prefixes before an ESC instruction. On iAPX 86/88 systems, this value points only at the ESC instruction.

6. Do Not Attempt Undefined iAPX 86/88 Operations.

iAPX 86/88 instructions like POP CS or MOV CS,op will either cause exception 6 (undefined opcode) or perform a protection setup operation like LIDT on the iAPX 286. Undefined bit encodings for bits 5-3 of the second byte of POP MEM or PUSH MEM will cause exception 13 on the iAPX 286.

7. Place a Far JMP Instruction at FFFF0H.

After reset, CS:IP = F000:FFF0 on the iAPX 286 (versus FFFF:0000 on the iAPX 86/88). This change was made to allow sufficient code space to enter protected mode without reloading CS. Placing a far JMP instruction at FFFF0H will avoid this difference. Note that the BOOTSTRAP option of LOC86 will automatically generate this jump instruction.

8. Do not Rely on the Value Written by PUSH SP.

The iAPX 286 will push a different value on the stack for PUSH SP than the iAPX 86/88. If the value pushed is important, replace PUSH SP instructions with the following three instructions:

```
PUSH    BP
MOV     BP,SP
XCHG   BP,[BP]
```

This code functions as the iAPX 86/88 PUSH SP instruction on the iAPX 286.

9. Do not Shift or Rotate by More than 31 Bits.

The iAPX 286 masks all shift/rotate counts to the low 5 bits. This MOD 32 operation limits the count to a maximum of 31 bits. With this change, the longest shift/rotate instruction is 39 clocks. Without this change, the longest shift/rotate instruction would be 264 clocks, which delays interrupt response until the instruction completes execution.

10. Do not Duplicate Prefixes.

The iAPX 286 sets an instruction length limit of 10 bytes. The only way to violate this limit is by duplicating a prefix two or more times before an instruction. Exception 6 occurs if the instruction length limit is violated. The iAPX 86 or 88 has no instruction length limit.

11. Do not Rely on Odd iAPX 86/88 LOCK Characteristics.

The LOCK prefix and its corresponding output signal should only be used to prevent other bus masters from interrupting a data movement operation. The iAPX 286 will always assert LOCK during an XCHG instruction with memory (even if the LOCK prefix was not used). LOCK should only be used with the XCHG, MOV, MOVS, INS, and OUTS instructions.

The iAPX 286 LOCK signal will *not* go active during an instruction prefetch.

12. Do not Single Step External Interrupt Handlers.

The priority of the iAPX 286 single step interrupt is different from that of the iAPX 86/88. This change was made to prevent an external interrupt from being

single-stepped if it occurs while single stepping through a program. The iAPX 286 single step interrupt has higher priority than any external interrupt.

The iAPX 286 will still single step through an interrupt handler invoked by INT instructions or an instruction exception.

13. Do not Rely on IDIV Exceptions for Quotients of 80H or 8000H.

The iAPX 286 can generate the largest negative number as a quotient for IDIV instructions. The iAPX 86 will instead cause exception 0.

14. Do not Rely on NMI Interrupting NMI Handlers.

After an NMI is recognized, the NMI input and processor extension limit error interrupt is masked until the first IRET instruction is executed.

15. The NPX error signal does not pass through an interrupt controller (an 8087 INT signal does). Any interrupt controller-oriented instructions for the iAPX 86/20 may have to be deleted.
16. If any real-mode program relies on address space wrap-around (e.g. FFF0:0400=0000:0300), then external hardware should be used to force the upper 4 addresses to zero during real mode.
17. Do not use I/O ports 00F8-00FFH. These are reserved for controlling 80287 and future processor extensions.

APPENDIX E

iAPX 286/386 SOFTWARE COMPATIBILITY CONSIDERATIONS

This appendix describes the considerations required in designing an *Operating System* for the protected mode iAPX 286 so that it will operate on an iAPX 386. An iAPX 286 Operating System running on the iAPX 386 would not use any of the advanced features of the iAPX 386 (i.e., paging or segments larger than 64K), but would run iAPX 286 code faster. Use of the new iAPX 386 features requires changes in the iAPX 286 Operating System.

The iAPX 386 is no different than any other software compatible processor in terms of requiring the same system environment to run the same software; the iAPX 386 must have the same amount of physical memory and I/O devices in the system as the iAPX 286 system to run the same software. Note that an iAPX 386 system requires a different memory system to achieve the higher performance.

The iAPX 286 design considerations can be generally characterized as avoiding use of functions or memory that the iAPX 386 will use. The exception to this rule is initialization code executed after power up. Such code must be changed to configure the iAPX 386 system to match that of the iAPX 286 system.

The following are iAPX 286/386 software compatibility design considerations:

1. Isolate the protected mode initialization code.

System initialization code will be required on the iAPX 386 to program operating parameters before executing any significant amount of iAPX 286 software. The iAPX 286 initialization software should be isolated from the rest of the Operating System.

The initialization code in Appendix A is an example of isolated initialization code. Such code can be extended to include programming of operating parameters before executing the initial protected mode task.

2. Self-modifying code requires cache flushes.

The code cache of the iAPX 386 requires consideration in the Operating System to support special cases of self-modifying code. In general, self-modifying code will not work on iAPX 386 with caching enabled.

Debuggers or loaders that change instructions (by overlaying data segments over code segments) should use an Operating System call to flush the cache. An iAPX 286 Operating System would do nothing with this call. An alternative approach is for the iAPX 286 Operating System to flush the cache automatically (do nothing on an iAPX 286) after subroutines or Operating System calls known to modify code segments.

3. Avoid wraparound of iAPX 286 24-bit physical address space.

Since the iAPX 386 has a larger physical address space, any segment whose base address is greater than FF0000 and whose limit is beyond FFFFFFFF will address the seventeenth megabyte of memory in the iAPX 386 32-bit physical address space instead of the first megabyte on an iAPX 286.

No expand-down segments should have a base address in the range FF00001–FFFFFFF. No expand-up segments should wrap around the iAPX 286 address space (the sum of their

base and limit is in the range 000000-00FFFE).

4. Zero the last word of every iAPX 286 descriptor.

The iAPX 386 uses the last word of each descriptor to expand the base address and limit fields of segments. Placing zeros in the descriptor will cause the iAPX 386 to treat the segments the same way as an iAPX 286 (except for address space wraparound as mentioned above).

5. Use only 80H or 00H for invalid descriptors.

The iAPX 386 uses more descriptor types than the iAPX 286. Numeric values of 8-15 in bits 3-0 of the access byte for control descriptors will cause a protection exception on the iAPX 286, but may be defined for other segment types on the iAPX 386. Access byte values of 80H and 00H will remain undefined descriptors on both the iAPX 286 and the iAPX 386.

6. Put error interrupt handlers in reserved interrupts 14, 15, 17-31.

Some of the unused, Intel-reserved interrupts of the iAPX 286 will be used by the iAPX 386 (i.e., page fault or bus error). These interrupts should not occur while executing an iAPX 286 operating system on an iAPX 386. However, it is safest to place an interrupt handler in these interrupts to print an error message and stop the system if they do occur.

7. Do not change bits 15-4 of MSW.

The iAPX 386 uses some of the undefined bits in the machine status word. iAPX

286 software should ignore bits 15-4 of the MSW. To change the MSW on an iAPX 286, read the old value first with LMSW, change bits 3-0 only, then write the new value with SMSW.

8. Use a restricted LOCK protocol for multiprocessor systems.

The iAPX 386 supports the iAPX 86/286 LOCK functions for simple instructions, but not the string move instructions. Any need for locked string moves can be satisfied by gaining control of a status semaphore before using the string move instruction. Any attempt to execute a locked string move will cause a protection exception on the iAPX 386.

The general iAPX 286 LOCK protocol does not efficiently extend to large multiprocessor systems. If all the processors in the system frequently use the iAPX 86/286 LOCK, they will prevent other processors from accessing memory and thereby impact system performance.

Access to semaphores in the future, including current iAPX 286 Operating Systems, should use a protocol with the following restrictions:

- Be sure the semaphore starts at a physical memory address that is a multiple of 4.
- Do not use string moves to access the variable.
- All accesses by any instruction or I/O device (even simple reads or writes) must use the LOCK prefix or system LOCK signal.

INDEX

- AAA, 3-28, B-14, C-7
- AAD, 3-28, B-15, C-7
- AAM, 3-28, B-16, C-7
- AAS, 3-28, B-17, C-7
- ADC, 3-2, B-18, C-7
- ADD, 3-7, B-18, C-7
- Addressing Modes, 2-15
 - Based Indexed Mode, 2-20
 - Based Indexed Mode with Displacement, 2-20
 - Based Mode (on BX or BP Registers), 2-20
 - Direct Address Mode, 2-20
 - Displacement, 2-16, B-1, B-2
 - Immediate Operand, 2-16, B-1, B-2, B-4, B-5
 - Indexed Mode (by DI or SI), 2-20
 - Opcode, 2-16, 2-21
 - Register Indirect Mode, 2-20
 - Summary, 2-20
- AF Flag,
 - (see Flags)
- AH Register, 2-7, 2-17, 3-9, 3-25, 3-27, 3-28, B-56, C-47
- AL Register, 2-7, 2-17, 3-9, 3-25, 3-27, 3-28, 3-30, B-73
- AND Instruction, 2-23, 3-10, B-19
- Arithmetic Instructions, 3-31
- ASCII
 - (see Data Types),
- AX Register, 2-6, 2-7, 2-12, 2-16, 3-8, 3-9, 3-17, 3-24, 3-30, B-73
- Based Index Mode
 - (see Addressing Modes),
- Based Index Mode with Displacement
 - (see Addressing Modes),
- Based Mode
 - (see Addressing Modes),
- BCD Arithmetic
 - (see Data Movement Instructions),
- BH Register, 2-7, 2-17, 3-9
- BL Register, 2-7, 2-17, 3-9, 3-17
- BOUND Instruction
 - (see Extended Instruction Set),
- Bound Range Exceeded (Interrupt 5),
 - (see Interrupt Handling),
- BP Register, 2-6, 2-7, 2-10, 2-11, 2-12, 2-17, 2-19, 3-8, 3-9, 3-10, 3-15, 3-17, 3-19, 3-25, 3-26
- Breakpoint Interrupt 3,
 - (see Interrupt Handling),
- BUSY, 3-31
- BX Register, 2-6, 2-7, 2-10, 2-11, 2-12, 2-17, 2-19, 3-8, 3-9, 3-10, 3-15, 3-17, 3-19, 3-25, 3-26
- Byte
 - (See Data Types),
- CALL Instructions, 3-18, 3-20, 7-18, B-22, B-23, B-24, C-43
- Call Gates, 7-16 through 7-20, C-47
- CBW Instructions, 3-17, B-25, C-46
- CF (Carry Flag)
 - (see Flags),
- CH Register, 2-7, 2-17
- CL Register, 2-7, 2-17, 3-11 through 3-16
- CLC Instruction, 3-26, B-26, C-49
- CLD Instruction, 2-15, 3-27, B-27, C-49
- CLI Instruction, 2-15, 3-29, B-28, C-49
- CLTS Instruction, 10-4, 10-5, B-29, C-49
- CMDS Instruction, 3-5, 3-24, 3-25, B-32, C-46, C-47
- CMP Instruction, 3-17, B-36, C-45
- Code Segment Access, 7-12, 7-13, 11-1, 11-2
- Comparison Instructions, 3-31
- Conforming Code Segments, 7-12, 7-13, 11-1, 11-2
- Constant Instructions, 3-31
- Control Transfers, 7-15, 7-16
- CPL (Current Privilege Level), 7-10, 7-14, C-43
- CS Register, 2-7, 2-8, 2-17, 2-18, 3-18, 3-19, 3-20, 5-5

INDEX

- CWD Instruction, 3-17, B-33, C-36
- CX Register, 2-6, 2-7, 2-17, 3-18, 3-24 through 3-26
- DAA, 3-28, B-34, C-45
- DAS, 3-28, B-35, C-45
- Data Management Instructions, 4-1, 4-2, 5-5
 - Address Manipulation, 3-25, 3-26
 - Arithmetic Instructions, 3-6
 - Addition Instructions, 3-7
 - Division Instructions, 3-9
 - Multiplication Instructions, 3-8
 - Subtraction Instructions, 3-7
 - BCD Arithmetic, 2-3, 2-4, 2-6, 3-22, 3-24
 - Character Transfer and String Instructions, 3-23
 - Repeat Prefixes, 3-23, 3-24
 - String Move, 3-23, 3-24, 3-25
 - String Translate, 3-23
 - Control Transfer Instructions, 3-17
 - Conditional Transfer, 3-21, 3-22
 - Software Generated Interrupts, 3-23
 - Interrupt Instructions, 3-23
 - Unconditional Transfer, 3-18, 3-19, 3-20
 - Flag Control, 3-26, 3-27
 - Logical Instructions, 3-10
 - Shift and Rotate Instructions, 3-10 through 3-16
 - Type Conversion Instructions, 3-17
 - Processor Extension Instructions, 3-30, 3-31
 - Processor Extension Overview, 3-30, 3-31
 - Test and Compare Instructions, 3-17
 - Trusted Instructions, 3-29
 - Input/Output Instructions, 3-29, 3-30
 - Stack Manipulation, 3-1 through 3-5
- Data Transfer Instructions, 3-31
- Data Types, 2-1 through 2-6
 - ASCII, 2-3, 2-5, B-14 through B-17, C-45, C-46
 - BCD, 2-3
 - Byte, 2-1, 2-2, 2-3
 - Floating Point, 2-3
 - Integer, 2-3
 - Packed BCD, 2-3
 - Pointer, 2-3
 - Strings, 2-3
 - Word, 2-2, 2-3
- DEC Instruction, 2-16, 3-8, B-36, C-45
- Dedicated Interrupt Vector, 5-5
- Descriptor Table, 6-4, 6-5, 6-6
- Descriptor Table Register, 6-6, 6-9, 7-6, 10-1, 10-2, 10-3
- DF Flag,
 - (see Flags),
- DH Register, 2-7, 2-17
- DI Instruction, 2-6, 2-10, 2-11, 2-15 through 2-19, 3-18, 3-23 through 3-26, 4-1
- Direct Address Mode
 - (see Addressing Modes),
- DIV Instruction, 1-24, 3-9, B-37, C-45
- Divide Error (Interrupt 0)
 - (see Interrupt Handling),
- DL Register, 2-7, 2-17
- DPL (Descriptor Privilege Level), 6-8, 7-10 through 7-21, 8-4, 9-4, 11-1, 11-4, C-43
- DS Register, 2-7, 2-8, 2-17, 2-18, 3-24, 5-7, B-58
- DX Register, 2-6, 2-7, 2-17, 3-8, 3-9, 3-17, 3-18, 3-25, 3-26, 3-30, 4-1
- EM (Bit in MSW), 10-4, 10-6
- ENTER Instruction, 4-1 through 4-5, B-38, C-48
- ES Register, 2-7, 2-8, 2-11, 2-17, 2-18, 2-19, 3-23, 3-24, 3-25, 4-1
- ESC (Instructions for Coprocessor), 3-30, C-44
- Extended Instruction Set (Chapter 4), 4-1 through 4-6
 - ENTER Build Stackframe, 4-1 through 4-5, B-38, C-48
 - LEAVE Remove Stackframe, 4-1, 4-5, B-61
 - Repeated IN and OUT String Instructions, 4-1, 4-2, B-89
- Flag Register, 2-14, 2-15, 3-5, 3-6, B-83, B-86

INDEX

- Flags, 2-14, 2-15, 3-5 through 3-8, 3-25, B-56
see also Use of Flags with Basic Instructions, 2-14, 2-15, 3-5 through 3-8, 3-25, B-56
- AF (Auxilliary Carry Flag), 2-14, 2-15, 3-5 through 3-10, 3-17, 3-25, 3-27, 3-28
- CF (Carry Flag), 2-14, 3-5 through 3-17, 3-21, 3-25 through 3-27, B-26, B-30, B-88, B-100
- DF (Direction Flag), 2-14, 2-15, 3-6, 3-7, 3-24 through 3-27, 4-2, B-27, B-100
- IF (Interrupt Flag), 2-14, 2-15, 3-6, 3-7, 3-29, 5-5, 5-7, 9-2, 9-3, B-28, B-102, C-49
- IOPL (Privilege Level), 2-14, 3-6, 3-29, 3-30, B-28, B-100
- NT (Nested Task Flag), 2-14, 3-6, 8-7, 9-3, 9-5, 9-7, 10-1
- OF (Overflow Flag), 2-14, 2-25, 3-5 through 3-11, 3-17, 3-21, 3-25
- PF (Parity Flag), 2-14, 2-15, 3-6 through 3-11, 3-17, 3-21, 3-25, 3-27
- SF (Sign Flag), 2-14, 3-5, 3-7 through 3-11, 3-17, 3-21, 3-25
- TF (Trap Flag), 2-14, 2-15, 3-6, 3-7, 9-13
- TS (Task Switch), 10-4, 10-5, B-29, C-49
- ZF (Zero Flag), 2-14, 3-5 through 3-11, 3-21, 3-22, 3-24, 3-25, 3-27, 11-3
- Floating Point
(*see* Data Types),
- Gates, 7-16
- GDT, 6-4 through 6-7, 6-10, 6-11, 6-12, 7-5 through 7-8, 7-17, C-43
- GDTR (Global Descriptor Register), 6-4 through 6-7, 6-11, 6-12, 10-1, 10-3, B-97
- General Protection Fault (Interrupt 3),
(*see* Interrupt Handling),
- General Registers, 2-6
- HALT Instruction, 2-16, 3-29, 10-5, B-39, C-49
- Hierarchy of 86, 186, 286 Instruction Sets, 2-25, 2-26
- Basic Instruction Set, 2-26, 3-1 through 3-31
- Extended Instruction Set, Chapter 4
- Instruction Set Overview, 2-25, 2-26
- System Control Register Set, Chapters 4 through 10
- HLT Instruction,
(*see* HALT Instruction),
- I/O, 2-22
- IDIV Instruction, 2-24, 3-9, 9-3, B-40, C-46
- IDT (Interrupt Descriptor Table), 9-1 through 9-9, 9-25, 10-2, B-62, C-49
- IDTR (Interrupt Descriptor Table Register), 9-1, 10-3
- IF (Interrupt Flag),
(*see* Flags),
- IMUL Instruction, 3-8, 3-9, B-41, C-45
- IN Instruction, 2-22, 3-29, 3-30, B-42, C-49
- INC Instruction, 2-16, 3-7, B-43, C-45
- INDEX Field, 6-4, 6-7, 6-10, 6-12, 7-7
- Indexed Mode, 2-20, 2-21, 2-22
- Index, Pointer and Base Register, 2-10 through 2-14
- Input/Output, 2-22, 2-23
- Instructions, 3-29, 3-30
- Memory Mapped I/O, 2-23
- Restrictions in Protected Mode, 3-29, 3-30
- Separate I/O Space, 2-22
- Size of I/O Space, 3-22
- INS/INSB/INSW Instruction, 3-30, 4-1
- Instruction Sets, C-43
(*see* Hierarchy of 86, 186, 286 Instruction Sets),
- INT Instruction,
(*see* Interrupt Handling),
- Integer
(*see* Data Types),
- Interrupt Handling, 2-23, 2-24, 5-3 through 5-7, 9-2 through 9-13
- Interrupt Priorities, 5-4
- Interrupt 0 Divide Error, 2-24, 3-9, 5-5, 5-6, 9-9, 9-13
- Interrupt 1 Single-Step, 5-5, 5-6, 9-9, 9-13
- Interrupt 2 Nonmaskable, 5-5, 5-6, 9-9, 9-13

INDEX

- Interrupt 3 Breakpoint, 2-24, 5-5, 5-6, 9-9
- Interrupt 4 INTO Detected Overflow, 2-24, 5-5, 5-6, 9-9
- Interrupt 5 BOUND Range Exceeded, 2-24, 4-6, 5-5, 5-6, 9-9, 9-13, B-21
- Interrupt 6 Invalid Opcode, 2-24, 5-6, 9-9, 9-10
- Interrupt 7 Processor Extension Not Available, 5-6, 5-7, 9-9
- Interrupt 8, Interrupt Table Limit Too Small, 5-6, 5-7, 9-9, 9-10
- Interrupt Vectors, 5-5, 5-6, 5-7
 - Reserved Vectors, 5-5, 5-6
- Interrupt Procedures, 5-4, 5-5
- Interrupt Vector Table, 5-3
- Interrupts and Exceptions,
 - (see Interrupt Handling and Interrupt Priorities),
- INTO Detected Overflow (Interrupt 4),
 - (see Interrupt Handling and Interrupt Priorities),
- INTO Instruction, 2-24, 3-23, B-45, C-48
- INTR,, 5-3, 5-4, 9-1, 9-2, 9-7, 11-7
- Invalid opcode (Interrupt 6)
 - (see Interrupt Handling and Interrupt Priorities),
- IOPL (I/O Privilege Level)
 - (see Flags),
- IP Register, 2-7, 2-8, 3-18, 3-19, 3-20, 5-4
- IRET Instruction, 3-18, 3-20, 5-5, 8-5, 8-7, 8-8, 9-2 through 9-8, 9-13, B-48, C-43, C-48
- JCXZ Instruction, 3-22, B-51, B-52, C-48
- JMP Instruction, 3-18, 3-19, B-53, B-54, B-55, C-43, C-47
- LAHF Instruction, 3-27, B-56, C-44
- LAR Instruction, 11-3, B-57, C-49
- LDS Instruction, 3-26, 5-1, B-58, C-44
- LDT (Local Descriptor Table), 6-4 through 6-7, 6-10, 6-12, 7-5 through 7-8, 7-17, 8-6, 8-8, 8-9, 9-11, 9-12, 10-1, 10-2, 10-3, 11-6
- LEA Instruction, 3-26, 3-27, B-60, C-49
- LEAVE Instruction, 4-1, 4-5, B-61, C-48
- LES Instruction, 3-26, 5-1, B-58, C-44
- LGDT Instruction, 6-11, 6-12, 10-3, 10-5, B-62, C-49
- LIDT Instruction, 5-6, 5-7, 10-3, 10-5, B-62, C-49
- LLDT Instruction, 6-12, 10-3, 10-5, B-63, C-49
- LMSW Instruction, 10-4, 10-5, B-64, C-49
- LOCK Prefix, 3-29, B-65, C-43, C-49
- LODS/LODSB/LODSW, 3-25, B-66, C-46
- LOOP Instruction, 3-5, 3-21, 3-22, B-17
- LOOPE Instruction, 3-22, B-67, C-48
- LOOPNE, 3-22, B-67, C-48
- LOOPNZ, 3-22, B-67, C-48
- LSL Instruction, 11-3, B-68, C-49
- Memory,
 - Physical Size, 2-1
 - Segmentation, 2-1
 - Implied Usage, 2-11
 - Interpretation in Protected Mode, 2-8, 2-9
 - Interpretation in Real Mode, 2-8, 2-9, 5-1, 5-2, 5-3
 - Modularity, 2-1
 - Virtual Size, 2-1
- Memory Addressing Modes, 2-17 through 2-21
- Memory Management, 6-1 through 6-11, 7-4
 - Task Management, 6-1, 6-2, Chapter 8
 - Context Switching (Task Switching), 8-4, 8-5, 8-6
 - Overview, 6-2
- Memory Management Registers, 6-8 through 6-11
- Memory Mapped I/O
 - (see Input/Output),
- Memory Mode,
- Memory Segmentation and Segment Registers, 2-7, 2-8, 2-9
- MOV Instructions, 2-16, 2-23, 3-1, B-70, C-44
- MOVS Instructions, 3-24, B-72, C-47
- MOVSB Instructions, 3-24, B-72

INDEX

- MOVSW Instruction, 3-24, 3-25, B-72
- MSW Register, 5-7, 8-5, 10-4, 10-6, 10-7, B-64
- MUL Instruction, 3-8, B-73, C-45

- NEG Instruction, 3-10, B-74, C-45
- NMI (Non maskable Interrupt), 5-5, 9-1, 9-2, 9-3, 9-9, 9-10
- Nonmaskable (Interrupt 2)
(*see* Interrupt Priorities),
- NOP Instruction, 2-16, 2-17, B-75
- NOT Instruction, 3-10, B-76, C-46
- Not Present (Interrupt 11)
(*see* Interrupt Priorities),
- NPX Processor Extension, 3-30, 3-31
- NT (Nested Task Flag)
(*see* Flags),
- Numeric Data Processor Instructions, 3-31

- OF (Overflow Flag)
(*see* Flags),
- Offset Computation, 2-19
- Operands, 2-16, 2-17
- OR Instruction, 2-23, 3-10, B-79, C-46
- OUT/OUTW, 2-23, 3-30, 10-5, B-78, C-44
- OUTS/OUTSB/OUTSW Instruction, 3-30, 4-1, B-79, C-46

- PF (Parity Flag)
(*see* Flags),
- Pointer
(*see* Data Types),
- POP Instruction, 3-4, B-80, C-49
- POPA Instruction, 3-4, 3-5, B-82, C-49
- POPF Instruction, 3-27, 3-29, B-83, C-49
- Processor Extension Error (Interrupt 6)
(*see* Interrupt Handling and Interrupt Priorities),
- Processor Extension Not Available
(Interrupt 7)
(*see* Interrupt and Interrupt Priorities),
- Processor Extension Segment Overrun
Interrupt (Interrupt 9)
(*see* Interrupt and Interrupt Priorities),
- Protected Mode, 1-3, 1-4, 6-2
- Protected Virtual Address Mode, 1-2, 1-4

- Protection Implementation, 7-2 through 7-10
- Protection Mechanisms, 1-3, 1-4
- Protection Overview, 1-3
- PUSH, 2-12, 3-1, 3-2, B-84, C-44
- PUSHA, 3-3, 3-4, B-85, C-44
- PUSHF, B-86, C-44

- Real Address Mode, 6-1, 6-2
- Register,
 - Base Architecture Diagram, 2-7
 - Base Register BX, 2-7, 2-17, 2-19, 2-20, 3-1, 3-4, 3-7, 3-8, 3-10, 3-15, 3-17, 3-19, 3-21, 4-6
 - Flags Register, 2-14, 2-15
 - General Registers, 2-6, 2-7
 - Index Registers DI, SI, 2-10
 - Overview, 2-6
 - Pointer Registers BP and SP, 2-10, 2-23
 - Segment Registers, 2-7, 2-8
 - Status and Control, 2-14, 2-15
- Register Direct Mode, 2-20
- Register and Immediate Modes, 2-17
- Register Indirect Mode, 2-20
(*see* Addressing Modes),
- Reserved Interrupt Vectors
(*see* Interrupt Handling and Interrupt Priorities),
- RESET, 10-6
- RCL Instruction, 3-15, 9-9, B-87, C-41
- RCR Instruction, 3-16, B-87, C-46
- REP Prefix, 3-24, 4-1, 4-2, B-89
- REPE Prefix, 3-25, B-89
- REPNE Prefix, 3-25, B-89
- REPNZ Prefix, 3-25
- REPZ Prefix, 3-25
- RET Instruction, 2-16, 3-18, 3-20, B-91, C-47
- ROL Instruction, 3-13, B-87, C-46
- ROR Instruction, 3-14, B-87, C-46
- RPL, 7-14, 8-6, 9-6, 11-3

- SAL Instruction, 3-4, B-44, C-46
- SAR Instruction, 3-12, B-94, C-46
- SBB Instruction, 3-5, B-95, C-45
- SCAS Instruction, 3-5, 3-24, 3-25, B-96, C-41

INDEX

- SEG (Segment Override Prefix), 2-18
- Segment Address Translation Registers, 6-9, 6-10, 6-11
- Segment Descriptor, 7-10, 7-11, 7-12
- Segment Overrun Exception (Interrupt 13)
(*see* Interrupt Handling and Interrupt Priorities),
- Segment Selection, 2-17, 2-18, 2-19
- SF (Sign Flag)
(*see* Flags),
- SGDT Instruction, 6-11, 10-3, B-97, C-49
- SHL Instruction, 3-11, B-94, C-46
- SHR Instruction, 3-11, 3-12, B-97, C-46
- SI Register, 2-6, 2-10, 2-11, 2-15, 2-17, 2-19, 3-9, 3-18, 3-24, 3-25, 3-26, 4-1
- SIDT Instruction, 10-3, B-97, C-49
- Single Step (Interrupt 1)
(*see* Interrupt Priorities),
- SMSW Instruction, 10-4, B-99, C-49
- SP Register, 2-7, 2-10, 2-11, 2-12, 2-19, 3-25, 3-26, 3-27, 4-3, 7-20, 7-21, 10-7
- SS Register, 2-7, 2-10, 2-11, 2-12, 2-19, 5-7, 6-9, 6-11, 7-12, 7-13, 7-14, 7-16, 7-20, 7-21, 7-22, 8-4, 9-12, 10-7
- Status and Control Registers, 2-14, 2-15
- Stack Flag
(*see* Flags),
- Stack Fault (Interrupt 12)
(*see* Interrupt Priorities),
- Stack Manipulation Instructions, 3-1 through 3-5
- Stack Operations, 2-10
 - Grow Down, 2-11
 - Overview, 2-10 through 2-14
 - Segment Register Usage, 2-11
 - Segment Usage Override, 2-11
- Stack Frame Base Pointer BP, 2-11
 - Top of Stack, 2-10, 2-11
- TOS, 2-10, 2-11
 - with BP and SP Registers, 2-10
- Status Flags, 3-5
- STC Instructions, 3-26, B-100, C-49
- STD Instructions, 3-27, B-101, C-49
- STI Instructions, 2-15, 3-29, B-102, C-49
- String Instructions, 3-23 through 3-25
- SUB Instruction, 3-7, 3-8 B-105, C-45
- System Address Registers, 6-11, 6-12
- System Initialization, 10-6, 10-7
- System Control Instructions, 10-3, 10-4
- TEST Instruction, 2-23, 3-17, B-106, C-46
- TF (Trap Flags)
(*see* Flags),
- TOS (Top of Stack)
(*see* Stack Operation),
- TR (Task Register), 7-6
- Transcendental Instruction, 3-37
- TSS (Task State Segment), 8-1 through 8-8
- Use of Flags with Basic Instructions, 3-5, 3-6
- Virtual Address, 6-2, 6-3, 6-4
- WAIT Instruction, 3-31, B-108, C-49
- XCHG Instruction, 3-1, B-109, C-44
- XLAT Instruction, 3-23, B-110, C-49
- XOR Instruction, 2-6, 3-10, B-111, C-46
- ZF (Zero Flag)
(*see* Flags),

Numeric Supplement

PREFACE

AN INTRODUCTION TO THE iAPX 286

This supplement describes the 80287 Numeric Processor Extension (NPX) for the iAPX 286 microprocessor. Below is a brief overview of iAPX 286 concepts, along with some of the nomenclature used throughout this and other Intel publications.

The iAPX 286 Microsystem

The iAPX 286 is a new VLSI microprocessor system with exceptional capabilities for supporting large-system applications. Based on a new-generation CPU (the Intel 80286), this powerful microsystem is designed to support multiuser reprogrammable and real-time multitasking applications. Its dedicated system support circuits simplify system hardware; sophisticated hardware and software tools reduce both the time and the cost of product development.

The iAPX 286 is a virtual-memory microprocessor with on-chip memory management and protection. The iAPX 286 microsystem offers a total-solution approach, enabling you to develop high-speed, interactive, multiuser, multitasking—and multiprocessor—systems more rapidly and at higher performance than ever before.

- Reliability and system up-time are becoming increasingly important in all applications. Information must be protected from misuse or accidental loss. The iAPX 286 includes a sophisticated and flexible four-level protection mechanism that isolates layers of operating system programs from application programs to maintain a high degree of system integrity.
- The iAPX 286 provides 16 megabytes of physical address space to support today's application requirements. This large physical memory enables the iAPX 286 to keep many large programs and data structures simultaneously in memory for high-speed access.
- For applications with dynamically changing memory requirements, such as multiuser business systems, the iAPX 286 CPU provides on-chip memory management and virtual memory support. On an iAPX 286-based system, each user can have up to a gigabyte (2^{30} bytes) of virtual-address space. This large address space virtually eliminates restrictions on the number or size of programs that may be part of the system.
- Large multiuser or real-time multitasking systems are easily supported by the iAPX 286. High-performance features, such as a very high-speed task switch, fast interrupt-response time, inter-task protection, and a quick and direct operating system interface, make the iAPX 286 highly suited to multiuser/multitasking applications.
- The iAPX 286 has two operating modes: Real-Address mode and Protected-Address mode. In Real-Address mode, the iAPX 286 is fully compatible with the iAPX 86, iAPX 88, iAPX 186, and iAPX 188 microprocessors; all of the extensive libraries of iAPX 86 and iAPX 88 software execute four to six times faster on the iAPX 286, without any modification.
- In Protected-Address mode, the advanced memory management and protection features of the iAPX 286 become available, without any reduction in performance. Upgrading iAPX 86 and iAPX 88 application programs to use these new memory management and protection features usually requires only reassembly or recompilation (some programs may require minor modification). This compatibility between iAPX 286 and iAPX 86 processor families reduces both the time and the cost of software development.

Microsystem Nomenclature

Over the last several years, the increase in microcomputer system and software complexity has given birth to a new family of microprocessor products oriented towards solving these increasingly complex problems. These new generations of microprocessors are both powerful and flexible, and include many processor enhancements, such as numeric (floating-point) extensions, I/O processors, and operating-system functionality in silicon.

As Intel's product line has grown and evolved, its microprocessor product numbering system has evolved into a comprehensive numbering scheme, while still including the basis of previous 8086 nomenclature.

Intel has adopted the following prefixes to provide differentiation and consistency among its Microsystem 80-related product lines:

iAPX—Processor Series
iRMX—Operating Systems
iSBC—Single-Board Computers
iSBX—MULTIMODULE Boards

Concentrating on the iAPX series, several processor families are defined:

iAPX 86—8086 CPU family
iAPX 88—8088 CPU family
iAPX 186—80186 CPU family
iAPX 286—80286 CPU family

Each processor family consists of the CPU (e.g., 80286), processor extensions (80287 for the iAPX 286), and bus support circuits, such as the 82284 Clock Generator and 82288 Bus Controller. With additional suffix information, configuration options for particular iAPX systems can be identified, such as the inclusion of Numeric Processor Extensions and I/O Processors. For the iAPX 286 family:

iAPX 286/10—indicates 80286 CPU alone
iAPX 286/20—indicates 80286 CPU + 80287 NPX

This nomenclature is intended as an addition to Intel's regular part-numbering scheme. The series-level nomenclature describes the functional capabilities provided by specific configurations of the iAPX processor families. The hardware used to implement each functional configuration is still described by referring to the parts involved (as is the case for most of the 80287 information described in this supplement).

This improved nomenclature provides a more meaningful view of system capability and performance within the evolving Microsystem 80 architecture.

The Organization of This Supplement

This supplement describes the 80287 Numeric Processor Extension (NPX) for the iAPX 286 microprocessor. The material in this supplement is presented from the perspective of software designers, both at an applications and at a systems software level.

- Chapter One, "Overview of Numeric Processing," gives an overview of the 80287 NPX and reviews the concepts of numeric computation using the 80287.
- Chapter Two, "Programming Numeric Applications," provides detailed information for software designers generating applications for iAPX 286/20 systems (systems containing an 80286 CPU with

an 80287 NPX). The iAPX 286/20 instruction set mnemonics are explained in detail, along with a description of programming facilities for iAPX 286/20 systems. A comparative iAPX 286/20 programming example is given.

- Chapter Three, “System-Level Numeric Programming,” provides information of interest to systems software writers, including details of the iAPX 286/20 architecture and operational characteristics.
- Chapter Four, “Numeric Programming Examples,” provides several detailed programming examples for the iAPX 286/20, including conditional branching, the conversion between floating-point values and their ASCII representations, and the calculation of several trigonometric functions. These examples illustrate assembly-language programming on the 80287 NPX.
- Appendix A, “Machine Instruction Encoding and Decoding,” gives reference information on the encoding of NPX instructions.
- Appendix B, “Compatibility between the 80287 NPX and the 8087,” describes the differences between the 80287 and the 8087.
- Appendix C, “Implementing the IEEE P754 Standard,” gives details of the IEEE P754 Standard.
- Appendix D, “80287 80-Bit HMOS Numeric Processor Extension,” provides hardware details of the 80287 and the iAPX 286/20.
- The Glossary defines 80287 and floating-point terminology. Refer to it as needed.

Related Publications

To best use the material in this supplement, readers should be familiar with the operation and architecture of iAPX 286 systems. The following manuals contain information related to the content of this supplement and of interest to programmers of iAPX 286/20 systems:

- *Introduction to the iAPX 286*, order number 210308
- *iAPX 286 Programmer's Reference Manual*, order number 210498
- *ASM286 Assembly Language Reference Manual*, order number 121924
- *iAPX 286 Operating System Writer's Guide*, order number 121960
- *iAPX 286 Hardware Reference Manual*, order number 210760
- *Microprocessor and Peripheral Handbook*, order number 210844
- *PL/M-286 User's Guide*, order number 121945
- *80287 Support Library Reference Manual*, order number 122129
- *8080 Software Toolbox Manual*, order number 122203 (includes information about 80287 Emulator Software)

Table of Contents

CHAPTER 1

OVERVIEW OF NUMERIC PROCESSING

| | Page |
|---|------|
| Introduction to the 80287 Numeric Processor Extension | 1-1 |
| Performance | 1-2 |
| Ease of Use | 1-2 |
| Applications | 1-3 |
| Upgradability | 1-4 |
| Programming Interface | 1-5 |
| Hardware Interface | 1-6 |
| 80287 Numeric Processor Architecture | 1-8 |
| The NPX Register Stack | 1-8 |
| The NPX Status Word | 1-9 |
| Control Word | 1-11 |
| The NPX Tag Word | 1-12 |
| The NPX Instruction and Data Pointers | 1-12 |
| Computation Fundamentals | 1-13 |
| Number System | 1-13 |
| Data Types and Formats | 1-15 |
| Binary Integers | 1-15 |
| Decimal Integers | 1-15 |
| Real Numbers | 1-15 |
| Rounding Control | 1-18 |
| Precision Control | 1-18 |
| Infinity Control | 1-19 |
| Special Computational Situations | 1-19 |
| Special Numeric Values | 1-20 |
| Nonnormal Real Numbers | 1-20 |
| Denormals and Gradual Underflow | 1-20 |
| Unnormals—Descendents of Denormal Operands | 1-22 |
| Zeros and Pseudo Zeros | 1-23 |
| Infinity | 1-25 |
| NaN (Not a Number) | 1-25 |
| Indefinite | 1-27 |
| Encoding of Data Types | 1-28 |
| Numeric Exceptions | 1-32 |
| Invalid Operation | 1-32 |
| Zero Divisor | 1-32 |
| Denormalized Operand | 1-33 |
| Numeric Overflow and Underflow | 1-33 |
| Inexact Result | 1-33 |
| Handling Numeric Errors | 1-33 |
| Automatic Exception Handling | 1-36 |
| Software Exception Handling | 1-36 |

| CHAPTER 2 | Page |
|--|-------------|
| PROGRAMMING NUMERIC APPLICATIONS | |
| The 80287 NPX Instruction Set | 2-1 |
| Compatibility with the 8087 NPX | 2-1 |
| Numeric Operands | 2-1 |
| Data Transfer Instructions | 2-2 |
| Arithmetic Instructions | 2-4 |
| Comparison Instructions | 2-9 |
| Transcendental Instructions | 2-11 |
| Constant Instructions | 2-13 |
| Processor Control Instructions | 2-14 |
| Instruction Set Reference Information | 2-20 |
| Instruction Execution Time | 2-20 |
| Bus Transfers | 2-21 |
| Instruction Length | 2-22 |
| Programming Facilities | 2-36 |
| High-Level Languages | 2-36 |
| PL/M-286 | 2-36 |
| ASM286 | 2-38 |
| Defining Data | 2-38 |
| Records and Structures | 2-39 |
| Addressing Modes | 2-39 |
| Comparative Programming Example | 2-41 |
| 80287 Emulation | 2-46 |
| Concurrent Processing with the 80287 | 2-46 |
| Managing Concurrency | 2-47 |
| Instruction Synchronization | 2-47 |
| Data Synchronization | 2-47 |
| Error Synchronization | 2-49 |
| Incorrect Error Synchronization | 2-50 |
| Proper Error Synchronization | 2-51 |
| CHAPTER 3 | |
| SYSTEM-LEVEL NUMERIC PROGRAMMING | |
| iAPX 286/20 Architecture | 3-1 |
| Processor Extension Data Channel | 3-1 |
| Real-Address Mode and Protected Virtual-Address Mode | 3-1 |
| Dedicated and Reserved I/O Locations | 3-2 |
| Processor Initialization and Control | 3-2 |
| System Initialization | 3-2 |
| Recognizing the 80287 NPX | 3-2 |
| Configuring the Numerics Environment | 3-3 |
| Initializing the 80287 | 3-4 |
| 80287 Emulation | 3-4 |

| | Page |
|---|------|
| Handling Numeric Processing Exceptions | 3-5 |
| Simultaneous Exception Response | 3-6 |
| Exception Recovery Examples | 3-6 |
| CHAPTER 4 | |
| NUMERIC PROGRAMMING EXAMPLES | |
| Conditional Branching Examples | 4-1 |
| Exception Handling Examples | 4-3 |
| Floating-Point to ASCII Conversion Examples | 4-7 |
| Function Partitioning | 4-14 |
| Exception Considerations | 4-15 |
| Special Instructions | 4-15 |
| Description of Operation | 4-15 |
| Scaling the Value | 4-16 |
| Inaccuracy in Scaling | 4-16 |
| Avoiding Underflow and Overflow | 4-16 |
| Final Adjustments | 4-17 |
| Output Format | 4-17 |
| Trigonometric Calculation Examples | 4-17 |
| FPTAN and FPREM | 4-17 |
| Cosine Uses Sine Code | 4-18 |
| APPENDIX A | |
| MACHINE INSTRUCTION ENCODING AND DECODING | |
| APPENDIX B | |
| COMPATIBILITY BETWEEN THE 80287 NPX AND THE 8087 | |
| APPENDIX C | |
| IMPLEMENTING THE IEEE P754 STANDARD | |
| Options Implemented in the 80287 | C-1 |
| Areas of the Standard Implemented in Software | C-1 |
| Additional Software to Meet the Standard | C-2 |
| APPENDIX D | |
| 80287 80-BIT HMOS NUMERIC PROCESSOR EXTENSION | |
| GLOSSARY OF 80287 AND FLOATING-POINT TERMINOLOGY | |

List of Tables

| Table | Title | Page |
|-------|---|------|
| 1-1 | Numeric Processing Speed Comparisons | 1-2 |
| 1-2 | Numeric Data Types | 1-5 |
| 1-3 | Principal NPX Instructions | 1-6 |
| 1-4 | Interpreting the NPX Condition Codes | 1-10 |
| 1-5 | Real Number Notation | 1-17 |
| 1-6 | Rounding Modes | 1-18 |
| 1-7 | Denormalization Process | 1-21 |
| 1-8 | Exceptions Due to Denormal Operands | 1-22 |
| 1-9 | Unnormal Operands and Results | 1-23 |
| 1-10 | Zero Operands and Results | 1-24 |
| 1-11 | Masked Overflow Response with Directed Rounding | 1-26 |
| 1-12 | Infinity Operands and Results | 1-26 |
| 1-13 | Binary Integer Encodings | 1-28 |
| 1-14 | Packed Decimal Encodings | 1-29 |
| 1-15 | Real and Long Real Encodings | 1-30 |
| 1-16 | Temporary Real Encodings | 1-31 |
| 1-17 | Exception Conditions and Masked Responses | 1-34 |
| 2-1 | Data Transfer Instructions | 2-3 |
| 2-2 | Arithmetic Instructions | 2-5 |
| 2-3 | Basic Arithmetic Instructions and Operands | 2-6 |
| 2-4 | Condition Code Interpretation after FPREM | 2-8 |
| 2-5 | Comparison Instructions | 2-10 |
| 2-6 | Condition Code Interpretation after FCOM | 2-10 |
| 2-7 | Condition Code Interpretation after FTST | 2-11 |
| 2-8 | FXAM Condition Code Settings | 2-11 |
| 2-9 | Transcendental Instructions | 2-12 |
| 2-10 | Constant Instructions | 2-13 |
| 2-11 | Processor Control Instructions | 2-14 |
| 2-12 | Key to Operand Types | 2-20 |
| 2-13 | Execution Penalties | 2-21 |
| 2-14 | Instruction Set Reference Data | 2-22 |
| 2-15 | PL/M-286 Built-In Procedures | 2-37 |
| 2-16 | 80287 Storage Allocation Directives | 2-38 |
| 2-17 | Addressing Mode Examples | 2-40 |
| 3-1 | NPX Processor State Following Initialization | 3-4 |
| 3-2 | Precedence of NPX Exceptions | 3-6 |
| A-1 | 80287 Instruction Encoding | A-1 |
| A-2 | Machine Instruction Decoding Guide | A-2 |

List of Figures

| Figure | Title | Page |
|---------------|--|-------------|
| 1-1 | Evolution and Performance of Numeric Processors | 1-1 |
| 1-2 | 80287 NPX Block Diagram | 1-7 |
| 1-3 | 80287 Register Set | 1-9 |
| 1-4 | 80287 Status Word | 1-10 |
| 1-5 | 80287 Control Word Format | 1-11 |
| 1-6 | 80287 Tag Word Format | 1-12 |
| 1-7 | 80287 Instruction and Data Pointer Image in Memory | 1-13 |
| 1-8 | 80287 Number System | 1-14 |
| 1-9 | Data Formats | 1-16 |
| 1-10 | Projective versus Affine Closure | 1-19 |
| 1-11 | Arithmetic Example Using Infinity | 1-36 |
| 2-1 | FSAVE/FRSTOR Memory Layout | 2-17 |
| 2-2 | FSTENV/FLDENV Memory Layout | 2-18 |
| 2-3 | Sample 80287 Constants | 2-39 |
| 2-4 | Status Word RECORD Definition | 2-40 |
| 2-5 | Structure Definition | 2-40 |
| 2-6 | Sample PL/M-286 Program | 2-42 |
| 2-7 | Sample ASM286 Program | 2-43 |
| 2-8 | Instructions and Register Stack | 2-44 |
| 2-9 | Synchronizing References to Shared Data | 2-47 |
| 2-10 | Documenting Data Synchronization | 2-47 |
| 2-11 | Nonconcurrent FIST Instruction Code Macro | 2-48 |
| 2-12 | Error Synchronization Examples | 2-49 |
| 3-1 | Software Routine to Recognize the 80287 | 3-3 |
| 4-1 | Conditional Branching for Compares | 4-2 |
| 4-2 | Conditional Branching for FXAM | 4-2 |
| 4-3 | Full-State Exception Handler | 4-4 |
| 4-4 | Reduced-Latency Exception Handler | 4-5 |
| 4-5 | Reentrant Exception Handler | 4-6 |
| 4-6 | Floating-Point to ASCII Conversion Routine | 4-7 |
| 4-7 | Calculating Trigonometric Functions | 4-18 |

Overview Of
Numeric Processing

1

CHAPTER 1

OVERVIEW OF NUMERIC PROCESSING

The 80287 NPX is a high-performance numerics processing element that extends the iAPX 286/10 architecture by adding significant numeric capabilities and direct support for floating-point, extended-integer, and BCD data types. The iAPX 286/20 computing system (80286 CPU with 80287 NPX) easily supports powerful and accurate numeric applications through its implementation of the proposed IEEE 754 Standard for Binary Floating-Point Arithmetic.

INTRODUCTION TO THE 80287 NUMERIC PROCESSOR EXTENSION

The 80287 Numeric Processor Extension (NPX) is highly compatible with its predecessor, the earlier Intel 8087 NPX.

The 8087 NPX was designed for use in iAPX 86-family systems. The iAPX 86 was the first micro-processor family to partition the processing unit to permit high-performance numeric capabilities. The 8087 NPX for this processor family implemented a complete numeric processing environment in compliance with the proposed IEEE 754 Floating-Point Standard.

With the 80287 Numeric Processor Extension, high-speed numeric computations have been extended to iAPX 286 high-performance multi-tasking and multi-user systems. Multiple tasks using the numeric processor extension are afforded the full protection of the iAPX 286 memory management and protection features.

Figure 1-1 illustrates the relative performance of 8-MHz iAPX 86/20 and iAPX 286/20 systems in executing numerics-oriented applications.

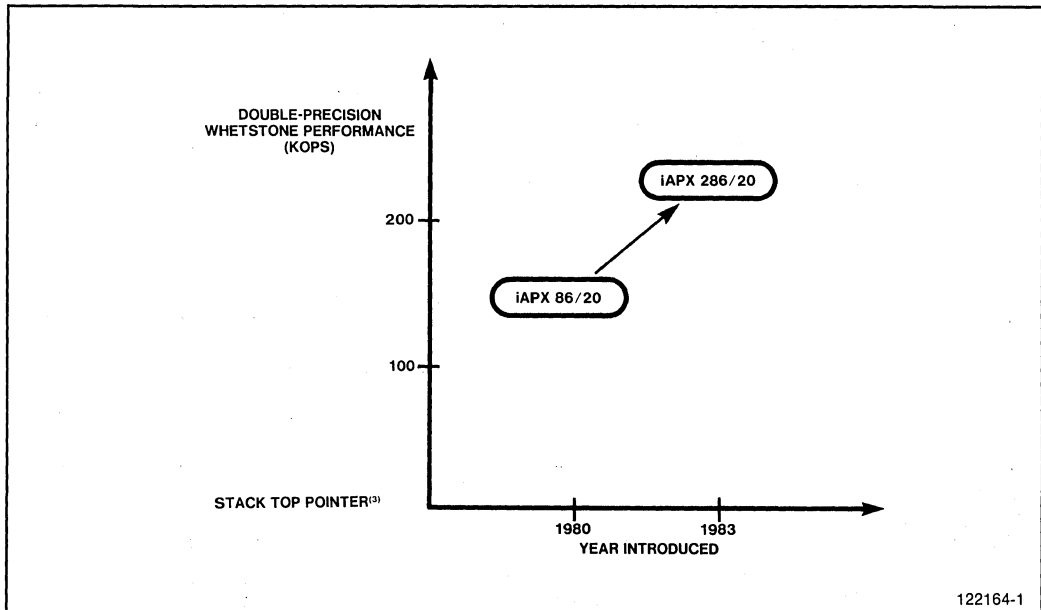


Figure 1-1. Evolution and Performance of Numeric Processors

Performance

Table 1-1 compares the execution times of several 80287 instructions with the equivalent operations executed in software on an 8-MHz 80286. The software equivalents are highly-optimized assembly-language procedures from the 80287 emulator. As indicated in the table, the 80287 NPX provides about 50 to 100 times the performance of software numeric routines on the 80286 CPU. An 8-MHz 80287 multiplies 32-bit and 64-bit real numbers in about 11.9 and 16.9 microseconds, respectively. Of course, the actual performance of the NPX in a given system depends on the characteristics of the individual application.

Although the performance figures shown in table 1-1 refer to operations on real (floating-point) numbers, the 80287 also manipulates fixed-point binary and decimal integers of up to 64 bits or 18 digits, respectively. The 80287 can improve the speed of multiple-precision software algorithms for integer operations by 10 to 100 times.

Because the 80287 NPX is an extension of the 80286 CPU, no software overhead is incurred in setting up the NPX for computation. The 80287 and 80286 processors coordinate their activities in a manner transparent to software. Moreover, built-in coordination facilities allow the 80286 CPU to proceed with other instructions while the 80287 NPX is simultaneously executing numeric instructions. Programs can exploit this concurrency of execution to further increase system performance and throughput.

Ease of Use

The 80287 NPX offers more than raw execution speed for computation-intensive tasks. The 80287 brings the functionality and power of accurate numeric computation into the hands of the general user.

Like the 8087 NPX that preceded it, the 80287 is explicitly designed to deliver stable, accurate results when programmed using straightforward "pencil and paper" algorithms. The IEEE 754 standard specifically addresses this issue, recognizing the fundamental importance of making numeric computations both easy and safe to use.

For example, most computers can overflow when two single-precision floating-point numbers are multiplied together and then divided by a third, even if the final result is a perfectly valid 32-bit number. The 80287 delivers the correctly rounded result. Other typical examples of undesirable machine behavior in straightforward calculations occur when solving for the roots of a quadratic equation:

$$-b \pm \frac{\sqrt{b^2 - 4ac}}{2a}$$

Table 1-1. Numeric Processing Speed Comparisons

| Floating-Point Instruction | | Approximate Performance Ratios: 8 MHz iAPX 286/20 to 8 MHz Protected Mode iAPX using E80287 |
|-----------------------------------|----------------|---|
| FADD ST,ST (Temp Real) | Addition | 1: 42:102 |
| FDIV DWORD PTR (Single-Precision) | Division | 1:266:358 |
| FXAM (Stack(0) assumed) | Examine | 1:139:454 |
| FYL2X (Stack(0),(1) assumed) | Logarithm | 1: 99:155 |
| FPATAN (Stack(0) assumed) | Arctangent | 1:153:176 |
| F2XM1 (Stack(0) assumed) | Exponentiation | 1: 41: 56 |

or computing financial rate of return, which involves the expression: $(1+i)^n$. On most machines, straightforward algorithms will not deliver consistently correct results (and will not indicate when they are incorrect). To obtain correct results on traditional machines under all conditions usually requires sophisticated numerical techniques that are foreign to most programmers. General application programmers using straightforward algorithms will produce much more reliable programs using the 80287. This simple fact greatly reduces the software investment required to develop safe, accurate computation-based products.

Beyond traditional numerics support for scientific applications, the 80287 has built-in facilities for commercial computing. It can process decimal numbers of up to 18 digits without round-off errors, performing *exact arithmetic* on integers as large as 2^{64} or 10^{18} . Exact arithmetic is vital in accounting applications where rounding errors may introduce monetary losses that cannot be reconciled.

The NPX contains a number of optional facilities that can be invoked by sophisticated users. These advanced features include two models of infinity, directed rounding, gradual underflow, and either automatic or programmed exception-handling facilities.

These automatic exception-handling facilities permit a high degree of flexibility in numeric processing software, without burdening the programmer. While performing numeric calculations, the NPX automatically detects exception conditions that can potentially damage a calculation. By default, on-chip exception handlers may be invoked to field these exceptions so that a reasonable result is produced, and execution may proceed without program interruption. Alternatively, the NPX can signal the CPU, invoking a software exception handler whenever various types of exceptions are detected.

Applications

The NPX's versatility and performance make it appropriate to a broad array of numeric applications. In general, applications that exhibit any of the following characteristics can benefit by implementing numeric processing on the 80287:

- Numeric data vary over a wide range of values, or include nonintegral values.
- Algorithms produce very large or very small intermediate results.
- Computations must be very precise; i.e., a large number of significant digits must be maintained.
- Performance requirements exceed the capacity of traditional microprocessors.
- Consistently safe, reliable results must be delivered using a programming staff that is not expert in numerical techniques.

Note also that the 80287 can reduce software development costs and improve the performance of systems that use not only real numbers, but operate on multiprecision binary or decimal integer values as well.

A few examples, which show how the 80287 might be used in specific numerics applications, are described below. In many cases, these types of systems have been implemented in the past with minicomputers. The advent of the 80287 brings the size and cost savings of microprocessor technology to these applications for the first time.

- Business data processing—The NPX's ability to accept decimal operands and produce *exact* decimal results of up to 18 digits greatly simplifies accounting programming. Financial calculations that use power functions can take advantage of the 80287's exponentiation and logarithmic instructions.

- Process control—The 80287 solves dynamic range problems automatically, and its extended precision allows control functions to be fine-tuned for more accurate and efficient performance. Control algorithms implemented with the NPX also contribute to improved reliability and safety, while the 80287's speed can be exploited in real-time operations.
- Computer numerical control (CNC)—The 80287 can move and position machine tool heads with accuracy in real-time. Axis positioning also benefits from the hardware trigonometric support provided by the 80287.
- Robotics—Coupling small size and modest power requirements with powerful computational abilities, the NPX is ideal for on-board six-axis positioning.
- Navigation—Very small, lightweight, and accurate inertial guidance systems can be implemented with the 80287. Its built-in trigonometric functions can speed and simplify the calculation of position from bearing data.
- Graphics terminals—The 80287 can be used in graphics terminals to locally perform many functions that normally demand the attention of a main computer; these include rotation, scaling, and interpolation. By also using an 82720 Graphics Display Controller to perform high speed data transfers, very powerful and highly self-sufficient terminals can be built from a relatively small number of 80286 family parts.
- Data acquisition—The 80287 can be used to scan, scale, and reduce large quantities of data as it is collected, thereby lowering storage requirements and time required to process the data for analysis.

The preceding examples are oriented toward *traditional* numerics applications. There are, in addition, many other types of systems that do not appear to the end user as *computational*, but can employ the 80287 to advantage. Indeed, the 80287 presents the imaginative system designer with an opportunity similar to that created by the introduction of the microprocessor itself. Many applications can be viewed as numerically-based if sufficient computational power is available to support this view. This is analogous to the thousands of successful products that have been built around “buried” microprocessors, even though the products themselves bear little resemblance to computers.

Upgradability

The architecture of the iAPX 286/10 CPU is specifically adapted to allow easy upgradability to an iAPX 286/20 system, simply by plugging in the 80287 NPX. For this reason, designers of iAPX 286/10 systems may wish to incorporate the 80287 NPX into their designs in order to offer two levels of price and performance at little additional cost.

Two features of the 80286 CPU make the design and support of upgradable iAPX 286 systems particularly simple:

- The 80286 can be programmed to recognize the presence of an 80287 NPX; that is, software can recognize whether it is running on an iAPX 286/10 or an iAPX 286/20 system.
- After determining whether the 80287 NPX is available, the 80286 CPU can be instructed to let the NPX execute all numeric instructions. If an 80287 NPX is not available, the 80286 CPU can emulate all 80287 numeric instructions in software. This emulation is completely transparent to the application software—the same object code may be used by both iAPX 286/10 and 286/20 systems. No relinking or recompiling of application software is necessary; the same code will simply execute faster on the iAPX 286/20 than on the iAPX 286/10 system.

To facilitate this design of upgradable iAPX 286/10 systems, Intel provides a software emulator for the 80287 that provides the functional equivalent of the 80287 hardware, implemented in software on

the 80286. Except for timing, the operation of this 80287 emulator (E80287) is the same as for the 80287 NPX hardware. When the emulator is combined as part of the systems software, the iAPX 286/10 system with 80287 emulation and the iAPX 286/20 (with 80287 hardware) are virtually indistinguishable to an application program. This capability makes it easy for software developers to maintain a single set of programs for both iAPX 286/10 and iAPX 286/20 systems. System manufacturers can offer the NPX as a simple plug-in performance option without necessitating any changes in the user's software.

Programming Interface

The iAPX 286/20 is programmed as a single processor; all of the 80287 registers appear to a programmer as extensions of the basic 80286 register set. The 80286 has a class of instructions known as ESCAPE instructions, all having a common format. These ESC instructions are numeric instructions for the 80287 NPX. These numeric instructions for the 80287 are simply encoded into the instruction stream along with 80286 instructions.

All of the CPU memory-addressing modes may be used in programming the NPX, allowing convenient access to record structures, numeric arrays, and other memory-based data structures. All of the memory management and protection features of the CPU are extended to the NPX as well.

Numeric processing in the 80287 centers around the NPX register stack. Programmers can treat these eight 80-bit registers as either a fixed register set, with instructions operating on explicitly-designated registers, or a classical stack, with instructions operating on the top one or two stack elements.

Internally, the 80287 holds all numbers in a uniform 80-bit temporary-real format. Operands that may be represented in memory as 16-, 32-, or 64-bit integers, 32-, 64-, or 80-bit floating-point numbers, or 18-digit packed BCD numbers, are automatically converted into temporary-real format as they are loaded into the NPX registers. Computation results are subsequently converted back into one of these destination data formats when they are stored into memory from the NPX registers.

Table 1-2 lists each of the seven data types supported by the 80287, showing the data format for each type. All operands are stored in memory with the least significant digits starting at the initial (lowest) memory address. Numeric instructions access and store memory operands using only this initial address. For maximum system performance, all operands should start at even memory addresses.

Table 1-2. Numeric Data Types

| Data Type | Bits | Significant Digits (Decimal) | Approximate Range (Decimal) |
|----------------|------|------------------------------|--|
| Word integer | 16 | 4 | $-32,768 \leq X \leq +32,767$ |
| Short integer | 32 | 9 | $-2 \times 10^9 \leq X \leq +2 \times 10^9$ |
| Long integer | 64 | 18 | $-9 \times 10^{18} \leq X \leq +9 \times 10^{18}$ |
| Packed decimal | 80 | 18 | $-99...99 \leq X \leq +99...99$ (18 digits) |
| Short real | 32 | 6-7 | $8.43 \times 10^{-37} \leq X \leq 3.37 \times 10^{38}$ |
| Long real | 64 | 15-16 | $4.19 \times 10^{-307} \leq X \leq 1.67 \times 10^{308}$ |
| Temporary real | 80 | 19 | $3.4 \times 10^{-4932} \leq X \leq 1.2 \times 10^{4932}$ |

Table 1-3 lists the 80287 instructions by class. No special programming tools are necessary to use the 80287, because all of the NPX instructions and data types are directly supported by the ASM286 Assembler and Intel's appropriate high-level languages.

Software routines for the iAPX 286/20 may be written in ASM286 Assembler or any of the following higher-level languages:

- PL/M-286
- PASCAL-286
- FORTRAN-286
- C-286

In addition, all of the development tools supporting the iAPX 86/20 (8086 and 8087) can also be used to develop software for the iAPX 286/20 operating in Real-Address mode.

All of these high-level languages provide programmers with access to the computational power and speed of the 80287 without requiring an understanding of the architecture of the 80286 and 80287 chips. Such architectural considerations as concurrency and data synchronization are handled automatically by these high-level languages. For the ASM286 programmer, specific rules for handling these issues are discussed in a later section of this supplement.

Hardware Interface

As an extension of the iAPX 286/10 processor, the 80287 is wired very much in parallel with the 80286 CPU. Four special status signals, PEREQ, PEACK, BUSY, and ERROR, permit the two processors to coordinate their activities. The 80287 NPX also monitors the 80286 \overline{SI} , $\overline{S0}$, $\overline{COD/INTA}$, \overline{READY} , \overline{HLDA} , and CLK pins to monitor the execution of ESC instructions (numeric instructions) by the 80286.

As shown in figure 1-2, the 80287 NPX is divided internally into two processing elements; the Bus Interface Unit (BIU) and the Numeric Execution Unit (NEU). The two units operate independently of one another: the BIU receives and decodes instructions, requests operand transfers with memory, and executes processor control instructions, whereas the NEU processes individual numeric instructions.

Table 1-3. Principal NPX Instructions

| Class | Instruction Types |
|-------------------|--|
| Data Transfer | Load (all data types), Store (all data types), Exchange |
| Arithmetic | Add, Subtract, Multiply, Divide, Subtract Reversed, Divide Reversed, Square Root, Scale, Remainder, Integer Part, Change Sign, Absolute Value, Extract |
| Comparison | Compare, Examine, Test |
| Transcendental | Tangent, Arctangent, $2^x - 1$, $Y \cdot \text{Log}_2(X + 1)$, $Y \cdot \text{Log}_2(X)$ |
| Constants | 0, 1, π , $\text{Log}_{10}2$, Log_e2 , Log_210 , Log_2e |
| Processor Control | Load Control Word, Store Control Word, Store Status Word, Load Environment, Store Environment, Save, Restore, Clear Exceptions, Initialize, Set Protected Mode |

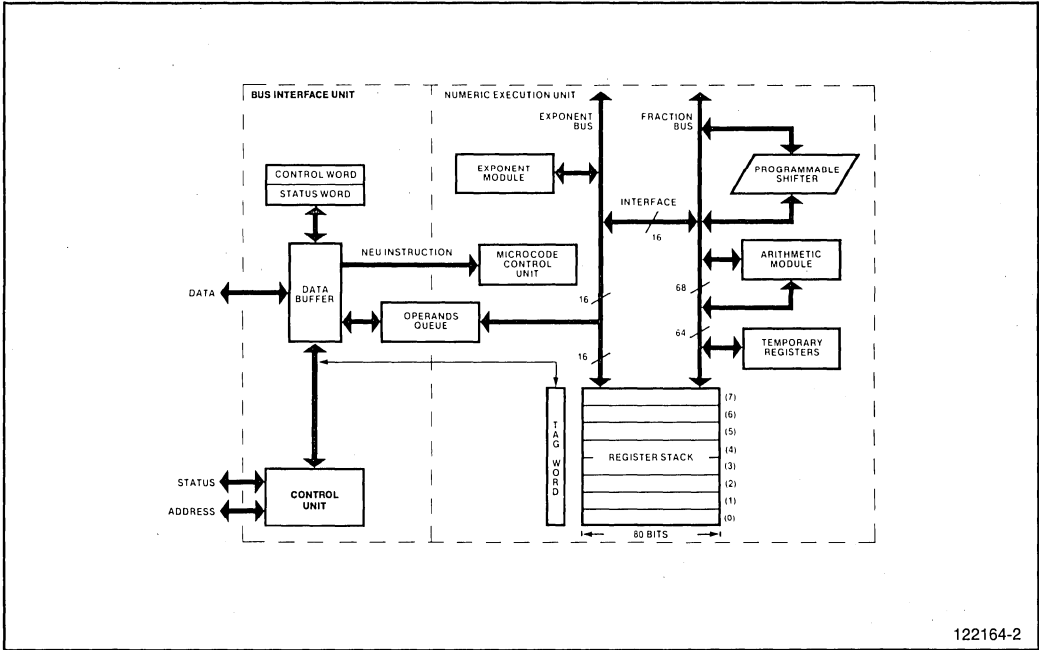


Figure 1-2. 80287 NPX Block Diagram

The BIU handles all of the status and signal lines between the 80287 and the 80286. The NEU executes all instructions that involve the register stack. These instructions include arithmetic, logical, transcendental, constant, and data transfer instructions. The data path in the NEU is 84 bits wide (68 fraction bits, 15 exponent bits, and a sign bit), allowing internal operand transfers to be performed at very high speeds.

The 80287 executes a single numeric instruction at a time. Before executing most ESC instructions, the 80286 tests the BUSY pin and, before initiating the command, waits until the 80287 indicates that it is not busy. Once initiated, the 80286 continues program execution, while the 80287 executes the numeric instruction. Unlike iAPX 86/20 systems, which required a WAIT instruction to test the BUSY signal before each ESC opcode, these WAIT instructions are permissible, but not necessary, in iAPX 286/20 programs.

In all cases, a WAIT or ESC instruction should be inserted after any 80287 store to memory (except FSTSW or FSTCW) or load from memory (except FLDENV, FLDCW, or FRSTOR) before the 80286 reads or changes the memory value.

When needed, all data transfers between memory and the 80287 NPX are performed by the 80286 CPU, using its Processor Extension Data Channel. Numeric data transfers performed by the 80286 use the same timing as any other bus cycle, and all such transfers come under the supervision of the iAPX 286 memory management and protection mechanisms. The 80286 Processor Extension Data Channel and the hardware interface between the 80286 and 80287 processors are described in Chapter Six of the *iAPX 286 Hardware Reference Manual*.

From the programmer's perspective, the 80287 can be considered just an extension of the 80286 processor. All interaction between the 80286 and the 80287 processors on the hardware level is handled automatically by the 80286 and is transparent to the software.

To communicate with the 80287, the 80286 uses the reserved I/O port addresses 00F8H, 00FAH, and 00FCH (I/O ports numbered 00F8H through 00FFH are reserved for the 80286/80287 interface). These I/O operations are performed automatically by the 80286 and are distinct from I/O operations that result from program I/O instructions. I/O operations resulting from the execution of ESC instructions are completely transparent to software. Any program may execute ESCAPE (numeric) instructions, without regard to its current I/O Privilege Level (IOPL).

To guarantee correct operation of the 80287, iAPX 286 programs must not perform any explicit I/O operations to any of the eight ports reserved for the 80287. The IOPL of the iAPX 286 can be used to protect the integrity of 80287 computations in multiuser reprogrammable applications, preventing any accidental or other tampering with the 80287 (see Chapter Eight of the *iAPX 286 Operating System Writer's Guide*).

80287 NUMERIC PROCESSOR ARCHITECTURE

To the programmer, the 80287 NPX appears as a set of additional registers complementing those of the 80286. These additional registers consist of

- Eight individually-addressable 80-bit numeric registers, organized as a register stack
- Three sixteen-bit registers containing:
 - an NPX status word
 - an NPX control word
 - a tag word
- Four 16-bit registers containing the NPX instruction and data pointers

All of the NPX numeric instructions focus on the contents of these NPX registers.

The NPX Register Stack

The 80287 register stack is shown in figure 1-3. Each of the eight numeric registers in the 80287's register stack is 80 bits wide and is divided into fields corresponding to the NPX's temporary-real data type.

Numeric instructions address the data registers relative to the register on the top of the stack. At any point in time, this top-of-stack register is indicated by the ST (Stack Top) field in the NPX status word. Load or push operations decrement ST by one and load a value into the new top register. A store-and-pop operation stores the value from the current ST register and then increments ST by one. Like 80286 stacks in memory, the 80287 register stack grows *down* toward lower-addressed registers.

Many numeric instructions have several addressing modes that permit the programmer to implicitly operate on the top of the stack, or to explicitly operate on specific registers relative to the ST. The ASM286 Assembler supports these register addressing modes, using the expression ST(0), or simply ST, to represent the current Stack Top and ST(i) to specify the *i*th register from ST in the stack ($0 \leq i \leq 7$). For example, if ST contains 011B (register 3 is the top of the stack), the following statement would add the contents of the top two registers on the stack (registers 3 and 5):

```
FADD    ST, ST(2)
```

The stack organization and top-relative addressing of the numeric registers simplify subroutine programming by allowing routines to pass parameters on the register stack. By using the stack to pass parameters rather than using "dedicated" registers, calling routines gain more flexibility in how they

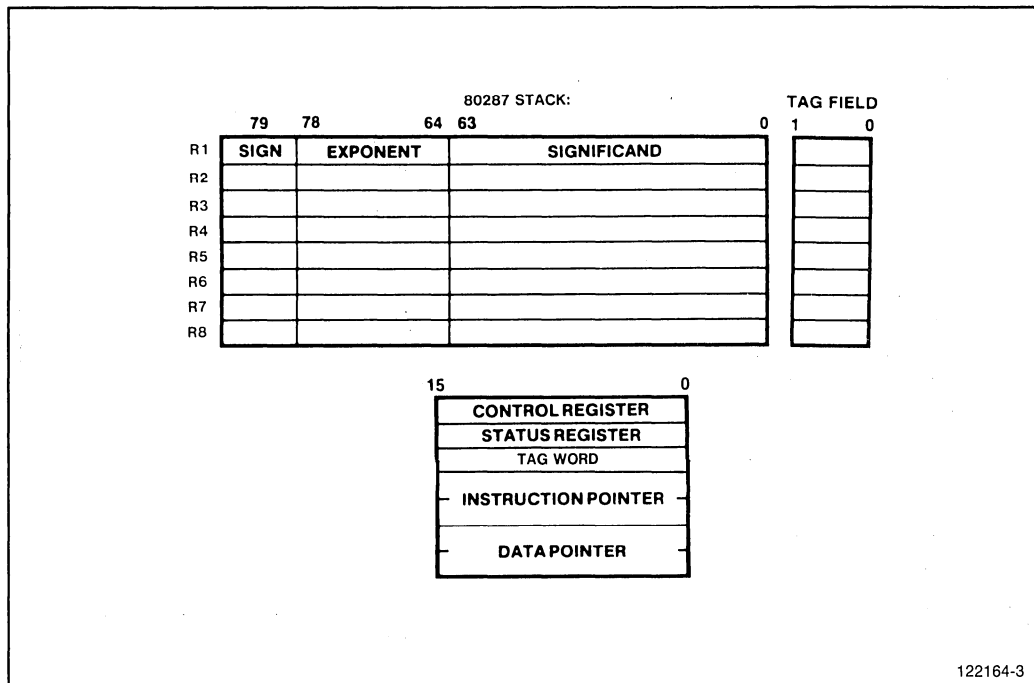


Figure 1-3. 80287 Register Set

use the stack. As long as the stack is not full, each routine simply loads the parameters onto the stack before calling a particular subroutine to perform a numeric calculation. The subroutine then addresses its parameters as ST, ST(1), etc., even though ST may, for example, refer to physical register 3 in one invocation and physical register 5 in another.

The NPX Status Word

The 16-bit status word shown in figure 1-4 reflects the overall state of the 80287. This status word may be stored into memory using the FSTSW/FNSTSW, FSTENV/FNSTENV, and FSAVE/FNSAVE instructions, and can be transferred into the 80286 AX register with the FSTSW AX/FNSTSW AX instructions, allowing the NPX status to be inspected by the CPU.

The Busy bit (bit 15) and the $\overline{\text{BUSY}}$ pin indicate whether the 80287's execution unit is idle (B=0) or is executing a numeric instruction or signalling an exception (B=1). (The instructions FNSTSW, FNSTSW AX, FNSTENV, and FNSAVE do not set the Busy bit themselves, nor do they require the Busy bit to be clear in order to execute.)

The four NPX condition code bits (C₀-C₃) are similar to the flags in a CPU: the 80287 updates these bits to reflect the outcome of arithmetic operations. The effect of these instructions on the condition code bits is summarized in table 1-4. These condition code bits are used principally for conditional branching. The FSTSWAX instruction stores the NPX status word directly into the CPU AX register, allowing these condition codes to be inspected efficiently by 80286 code.

Bits 12-14 of the status word point to the 80287 register that is the current Stack Top (ST). The significance of the stack top has been described in the section on the Register Stack.

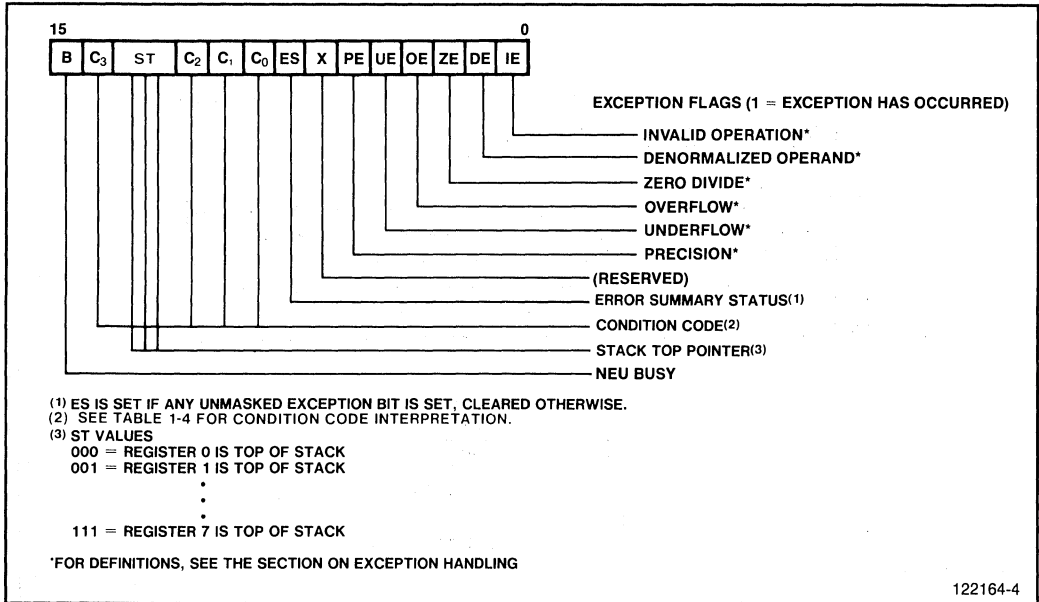


Figure 1-4. 80287 Status Word

Table 1-4. Interpreting the NPX Condition Codes

| Instruction Type | C ₃ | C ₂ | C ₁ | C ₀ | Interpretation |
|------------------|----------------|----------------|----------------|---------------------------------|--|
| Compare, Test | 0 | 0 | X | 0 | ST > Source or 0 (FTST) |
| | 0 | 0 | X | 1 | ST < Source or 0 (FTST) |
| | 1 | 0 | X | 0 | ST = Source or 0 (FTST) |
| | 1 | 1 | X | 1 | ST is not comparable |
| Remainder | Q ₁ | 0 | Q ₀ | Q ₂ | Complete reduction with three low bits of quotient in C ₀ , C ₃ , and C ₁ |
| | U | 1 | U | U | Incomplete Reduction |
| Examine | 0 | 0 | 0 | 0 | Valid, positive unnormalized |
| | 0 | 0 | 0 | 1 | Invalid, positive, exponent = 0 |
| | 0 | 0 | 1 | 0 | Valid, negative, unnormalized |
| | 0 | 0 | 1 | 1 | Invalid, negative, exponent = 0 |
| | 0 | 1 | 0 | 0 | Valid, positive, normalized |
| | 0 | 1 | 0 | 1 | Infinity, positive |
| | 0 | 1 | 1 | 0 | Valid, negative, normalized |
| | 0 | 1 | 1 | 1 | Infinity, negative |
| | 1 | 0 | 0 | 0 | Zero, positive |
| | 1 | 0 | 0 | 1 | Empty Register |
| | 1 | 0 | 1 | 0 | Zero, negative |
| | 1 | 0 | 1 | 1 | Empty Register |
| 1 | 1 | 0 | 0 | Invalid, positive, exponent = 0 | |
| 1 | 1 | 0 | 1 | Empty Register | |
| 1 | 1 | 1 | 0 | Invalid, negative, exponent = 0 | |
| 1 | 1 | 1 | 1 | Empty Register | |

NOTES:

1. ST = Top of stack
2. X = value is not affected by instruction
3. U = value is undefined following instruction
4. Q_n = Quotient bit n following complete reduction (C₂=0)

Figure 1-4 shows the six error flags in bits 0-5 of the status word. Bit 7 is the error summary status (ES) bit. ES is set if any unmasked exception bits are set, and is cleared otherwise. If this bit is set, the $\overline{\text{ERROR}}$ signal is asserted. Bits 0-5 indicate whether the NPX has detected one of six possible exception conditions since these status bits were last cleared or reset.

Control Word

The NPX provides the programmer with several processing options, which are selected by loading a word from memory into the control word. Figure 1-5 shows the format and encoding of the fields in the control word.

The low-order byte of this control word configures the 80287 error and exception masking. Bits 0-5 of the control word contain individual masks for each of the six exception conditions recognized by the 80287. The high-order byte of the control word configures the 80287 processing options, including

- Precision control
- Rounding control
- Infinity control

The Precision control bits (bits 8-9) can be used to set the 80287 internal operating precision at less than the default precision (64-bit significand). These control bits can be used to provide compatibility with the earlier-generation arithmetic processors having less precision than the 80287, as required by the IEEE 754 standard. Setting a lower precision, however, will not affect the execution time of numeric calculations.

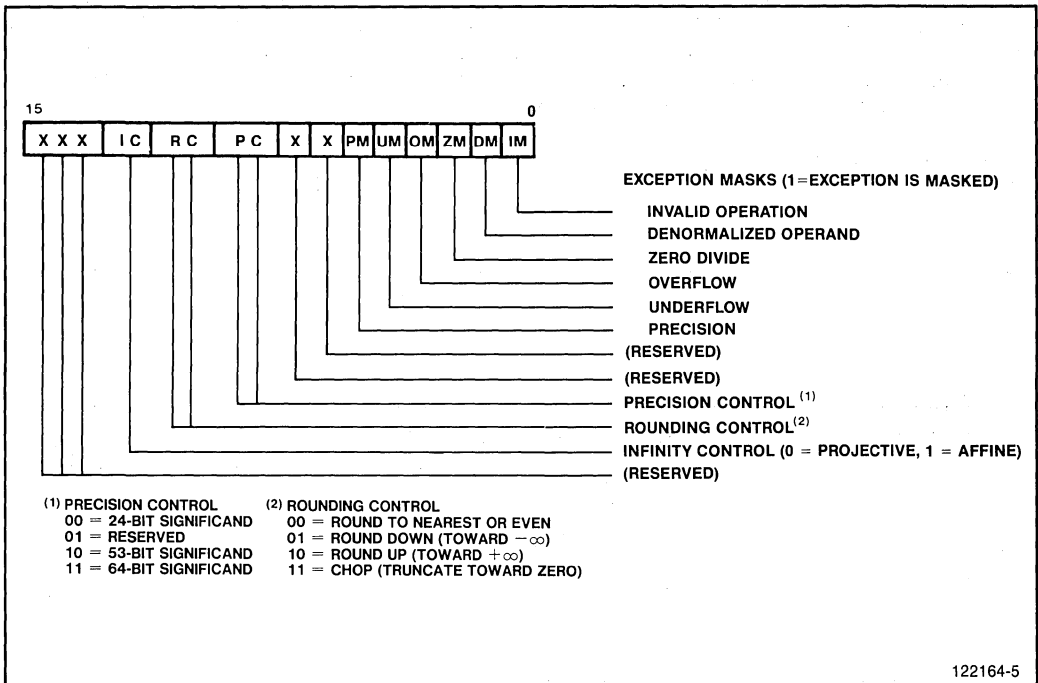


Figure 1-5. 80287 Control Word Format

The rounding control bits (bits 10-11) provide for directed rounding and true chop as well as the unbiased round-to-nearest-even mode specified in the IEEE 754 standard.

The infinity control bit (bit 12) determines the manner in which the 80287 treats the special values of infinity. Either affine closure (where positive infinity is distinct from negative infinity) or projective closure (infinity is treated as a single unsigned quantity) may be specified. These two alternative views of infinity are discussed in the section on Computation Fundamentals.

The NPX Tag Word

The tag word indicates the contents of each register in the register stack, as shown in figure 1-6. The tag word is used by the NPX itself in order to track its numeric registers and optimize performance. Programmers may use this tag information to interpret the contents of the numeric registers. The tag values are stored in the tag word corresponding to the physical registers 0-7. Programmers must use the current Stack Top (ST) pointer stored in the NPX status word to associate these tag values with the relative stack registers ST(0) through ST(7).

The NPX Instruction and Data Pointers

The NPX instruction and data registers provide support for programmed exception-handlers. Whenever the 80287 executes a math instruction, the NPX internally saves the instruction address, the operand address (if present), and the instruction opcode. The 80287 FSTENV and FSAVE instructions store this data into memory, allowing exception handlers to determine the precise nature of any numeric exceptions that may be encountered.

When stored in memory, the instruction and data pointers appear in one of two formats, depending on the operating mode of the 80287. Figure 1-7 shows these pointers as they are stored following an FSTENV instruction. In Real-Address mode, these values are the 20-bit physical address and 11-bit opcode formatted like the 8087. In Protected mode, these values are the 32-bit virtual addresses used by the program that executed the ESC instruction.

The instruction address saved in the 80287 will point to any prefixes that preceded the instruction. This is different from the 8087, for which the instruction address pointed only to the ESC instruction opcode.

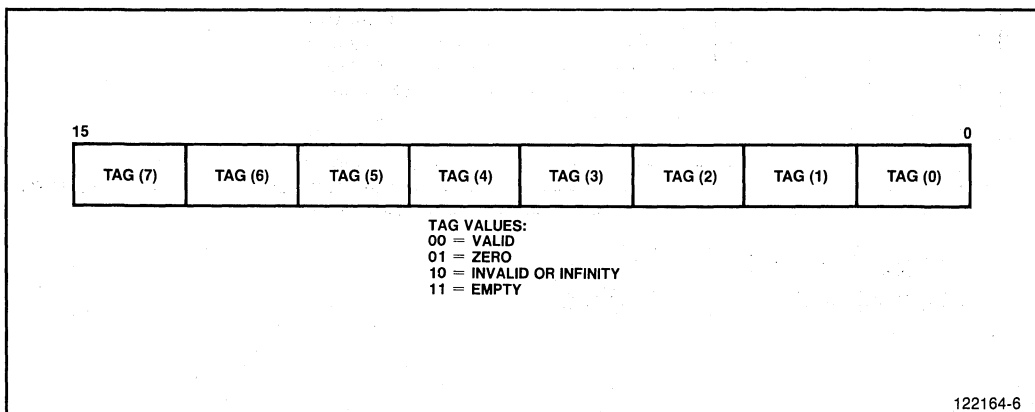


Figure 1-6. 80287 Tag Word Format

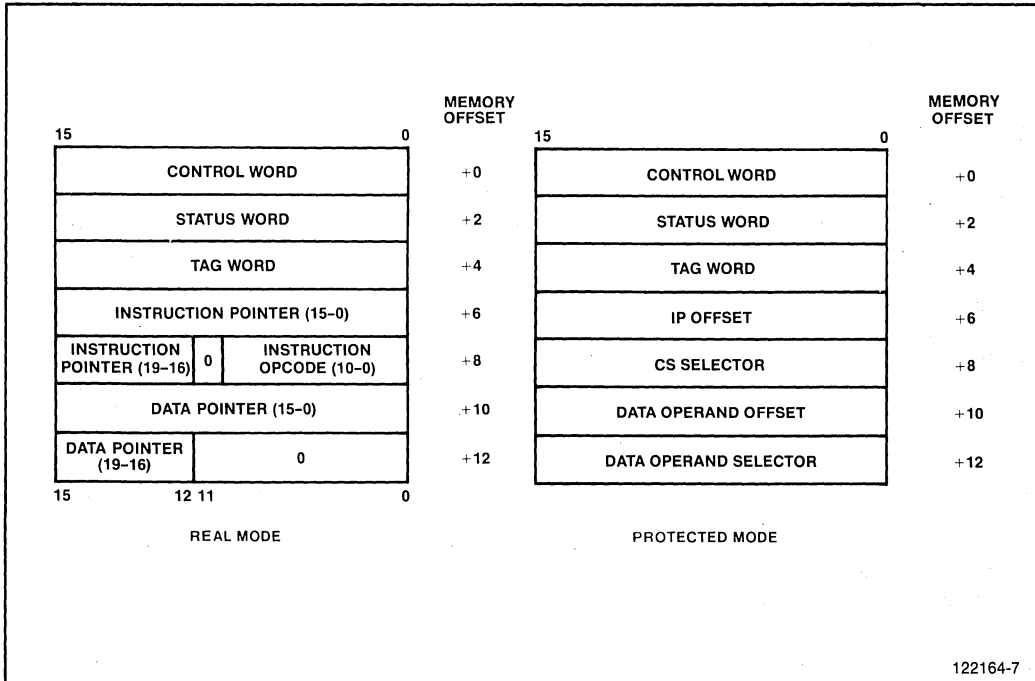


Figure 1-7. 80287 Instruction and Data Pointer Image in Memory

COMPUTATION FUNDAMENTALS

This section covers 80287 programming concepts that are common to all applications. It describes the 80287's internal number system and the various types of numbers that can be employed in NPX programs. The most commonly used options for rounding, precision, and infinity (selected by fields in the control word) are described, with exhaustive coverage of less frequently used facilities deferred to later sections. Exception conditions that may arise during execution of NPX instructions are also described along with the options that are available for responding to these exceptions.

Number System

The system of real numbers that people use for pencil and paper calculations is conceptually infinite and continuous. There is no upper or lower limit to the magnitude of the numbers one can employ in a calculation, or to the precision (number of significant digits) that the numbers can represent. When considering any real number, there is always an infinity of numbers both larger and smaller. There is also an infinity of numbers between (i.e., with more significant digits than) any two real numbers. For example, between 2.5 and 2.6 are 2.51, 2.5897, 2.500001, etc.

While ideally it would be desirable for a computer to be able to operate on the entire real number system, in practice this is not possible. Computers, no matter how large, ultimately have fixed-size registers and memories that limit the system of numbers that can be accommodated. These limitations determine both the range and the precision of numbers. The result is a set of numbers that is finite and discrete, rather than infinite and continuous. This sequence is a subset of the real numbers that is designed to form a useful *approximation* of the real number system.

Figure 1-8 superimposes the basic 80287 real number system on a real number line (decimal numbers are shown for clarity, although the 80287 actually represents numbers in binary). The dots indicate the subset of real numbers the 80287 can represent as data and final results of calculations. The 80287's range is approximately $\pm 4.19 \times 10^{-307}$ to $\pm 1.67 \times 10^{308}$. Applications that are required to deal with data and final results outside this range are rare. For reference, the range of the IBM 370 is about $\pm 0.54 \times 10^{-78}$ to $\pm 0.72 \times 10^{76}$.

The finite spacing in figure 1-8 illustrates that the NPX can represent a great many, but not all, of the real numbers in its range. There is always a gap between two adjacent 80287 numbers, and it is possible for the result of a calculation to fall in this space. When this occurs, the NPX rounds the true result to a number that it can represent. Thus, a real number that requires more digits than the 80287 can accommodate (e.g., a 20-digit number) is represented with some loss of accuracy. Notice also that the 80287's representable numbers are not distributed evenly along the real number line. In fact, an equal number of representable numbers exists between successive powers of 2 (i.e., as many representable numbers exist between 2 and 4 as between 65,536 and 131,072). Therefore, the gaps between representable numbers are larger as the numbers increase in magnitude. All integers in the range $\pm 2^{64}$ (approximately $\pm 10^{18}$), however, are exactly representable.

In its internal operations, the 80287 actually employs a number system that is a substantial superset of that shown in figure 1-8. The internal format (called temporary real) extends the 80287's range to about $\pm 3.4 \times 10^{-4932}$ to $\pm 1.2 \times 10^{4932}$, and its precision to about 19 (equivalent decimal) digits. This format is designed to provide extra range and precision for constants and intermediate results, and is not normally intended for data or final results.

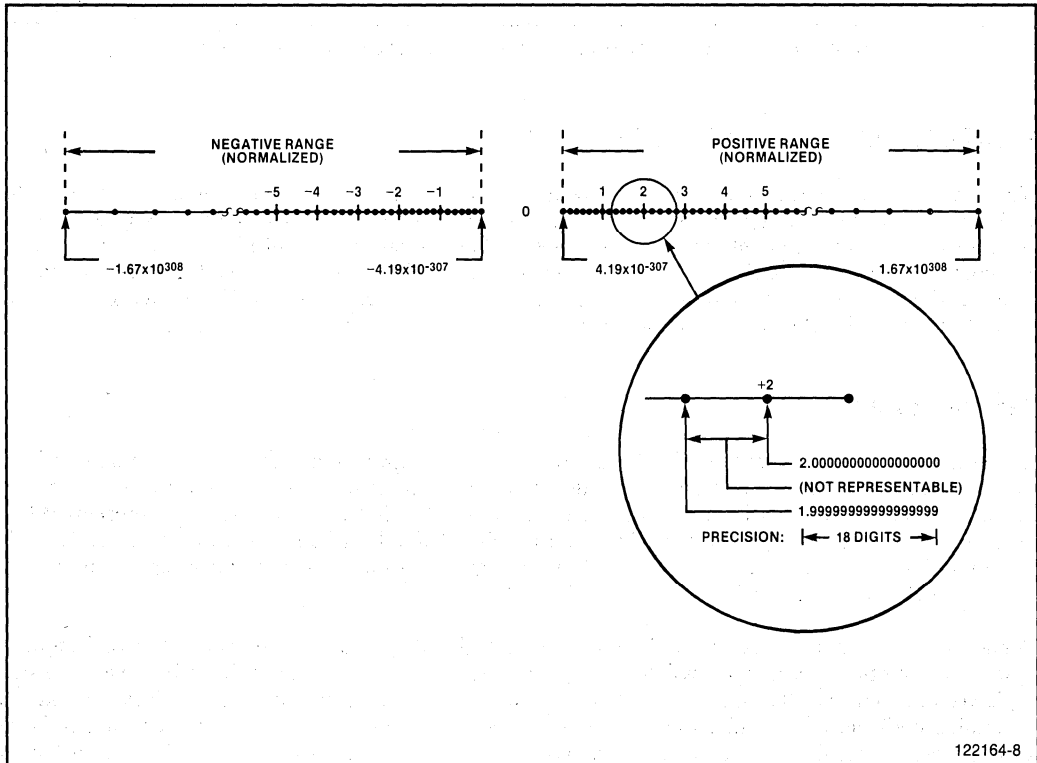


Figure 1-8. 80287 Number System

From a practical standpoint, the 80287's set of real numbers is sufficiently large and dense so as not to limit the vast majority of microprocessor applications. Compared to most computers, including mainframes, the NPX provides a very good approximation of the real number system. It is important to remember, however, that it is not an exact representation, and that arithmetic on real numbers is inherently approximate.

Conversely, and equally important, the 80287 *does* perform exact arithmetic on integer operands. That is, an operation on two integers returns an exact integral result, provided that the true result is an integer and is in range. For example, $4 \div 2$ yields an exact integer, $1 \div 3$ does not, and $2^{40} \times 2^{30} + 1$ does not, because the result requires greater than 64 bits of precision.

Data Types and Formats

The 80287 recognizes seven numeric data types, divided into three classes: binary integers, packed decimal integers, and binary reals. A later section describes how these formats are stored in memory (the sign is always located in the highest-addressed byte). Figure 1-9 summarizes the format of each data type. In the figure, the most significant digits of all numbers (and fields within numbers) are the leftmost digits. Table 1-5 provides the range and number of significant (decimal) digits that each format can accommodate.

BINARY INTEGERS

The three binary integer formats are identical except for length, which governs the range that can be accommodated in each format. The leftmost bit is interpreted as the number's sign: 0=positive and 1=negative. Negative numbers are represented in standard two's complement notation (the binary integers are the only 80287 format to use two's complement). The quantity zero is represented with a positive sign (all bits are 0). The 80287 word integer format is identical to the 16-bit signed integer data type of the 80286.

DECIMAL INTEGERS

Decimal integers are stored in packed decimal notation, with two decimal digits "packed" into each byte, except the leftmost byte, which carries the sign bit (0=positive, 1=negative). Negative numbers are not stored in two's complement form and are distinguished from positive numbers only by the sign bit. The most significant digit of the number is the leftmost digit. All digits must be in the range 0H-9H.

REAL NUMBERS

The 80287 stores real numbers in a three-field binary format that resembles scientific, or exponential, notation. The number's significant digits are held in the *significand* field, the *exponent* field locates the binary point within the significant digits (and therefore determines the number's magnitude), and the *sign* field indicates whether the number is positive or negative. (The exponent and significand are analogous to the terms "characteristic" and "mantissa" used to describe floating point numbers on some computers.) Negative numbers differ from positive numbers only in the sign bits of their significands.

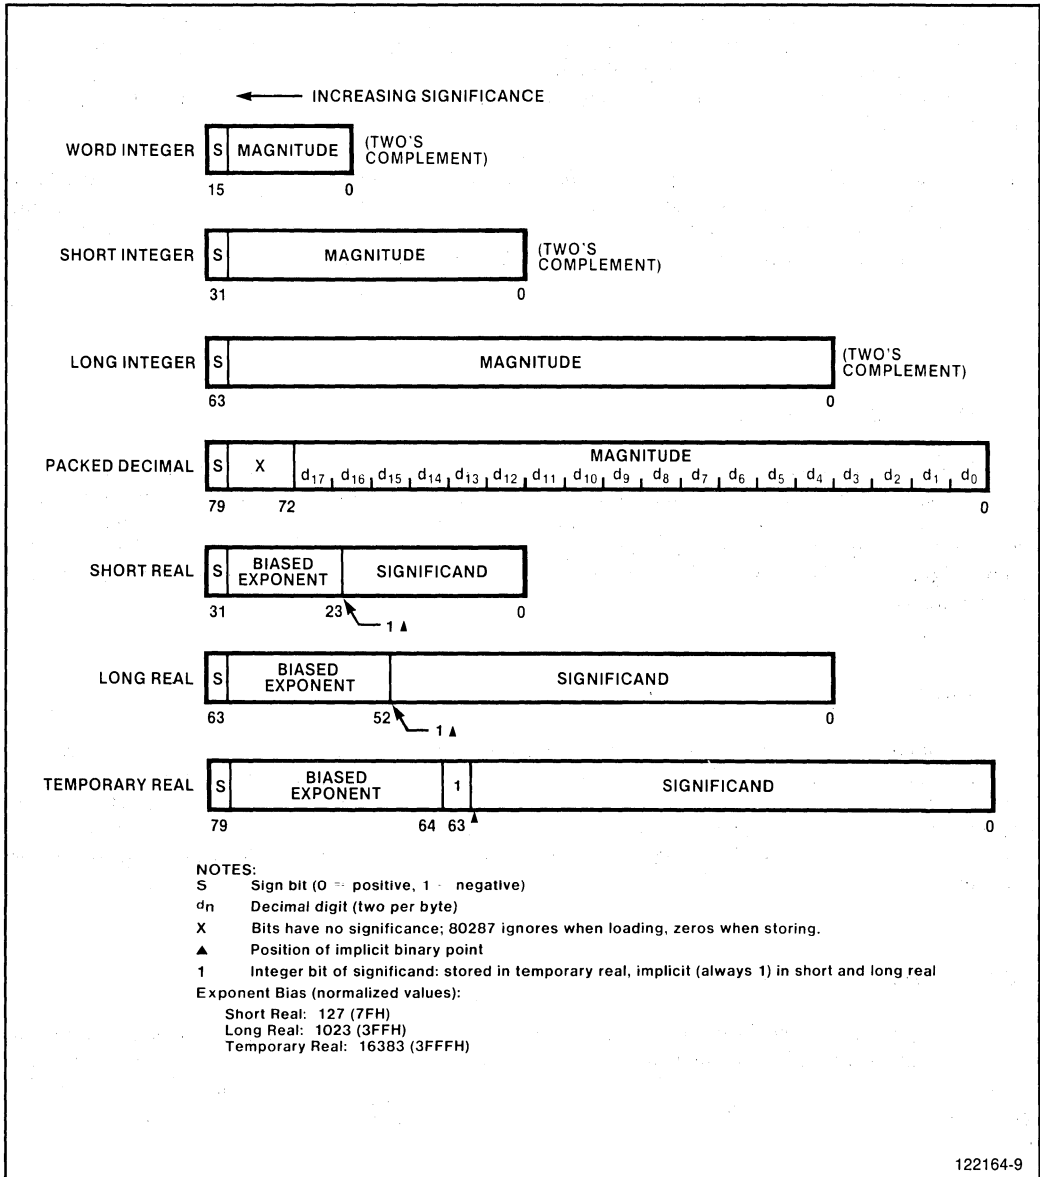


Figure 1-9. Data Formats

Table 1-5 shows how the real number 178.125 (decimal) is stored in the 80287 short real format. The table lists a progression of equivalent notations that express the same value to show how a number can be converted from one form to another. The ASM286 and PL/M-286 language translators perform a similar process when they encounter programmer-defined real number constants. Note that not every decimal fraction has an exact binary equivalent. The decimal number 1/10, for example, cannot be expressed exactly in binary (just as the number 1/3 cannot be expressed exactly in decimal). When a translator encounters such a value, it produces a rounded binary approximation of the decimal value.

Table 1-5. Real Number Notation

| Notation | Value | | |
|--|--------------------------------|-----------------|---|
| Ordinary Decimal | 178.125 | | |
| Scientific Decimal | 1 Δ 78125E2 | | |
| Scientific Binary | 1 Δ 0110010001E111 | | |
| Scientific Binary (Biased Exponent) | 1 Δ 0110010001E10000110 | | |
| 80287 Short Real (Normalized) | Sign | Biased Exponent | Significand |
| | 0 | 10000110 | \uparrow 0110010001000000000000 \leftarrow 1 Δ (implicit) |

The NPX usually carries the digits of the significand in normalized form. This means that, except for the value zero, the significand is an *integer* and a *fraction* as follows:

$$1\Delta\text{fff...ff}$$

where Δ indicates an assumed binary point. The number of fraction bits varies according to the real format: 23 for short, 52 for long, and 63 for temporary real. By normalizing real numbers so that their integer bit is always a 1, the 80287 eliminates leading zeros in small values ($|x| < 1$). This technique maximizes the number of significant digits that can be accommodated in a significand of a given width. Note that, in the short and long real formats, the integer bit is *implicit* and is not actually stored; the integer bit is physically present in the temporary real format only.

If one were to examine only the significand with its assumed binary point, all normalized real numbers would have values between 1 and 2. The exponent field locates the *actual* binary point in the significant digits. Just as in decimal scientific notation, a positive exponent has the effect of moving the binary point to the right, and a negative exponent effectively moves the binary point to the left, inserting leading zeros as necessary. An unbiased exponent of zero indicates that the position of the assumed binary point is also the position of the actual binary point. The exponent field, then, determines a real number's magnitude.

In order to simplify comparing real numbers (e.g., for sorting), the 80287 stores exponents in a biased form. This means that a constant is added to the *true exponent* described above. The value of this bias is different for each real format (see figure 1-9). It has been chosen so as to force the *biased exponent* to be a positive value. This allows two real numbers (of the same format and sign) to be compared as if they are unsigned binary integers. That is, when comparing them bitwise from left to right (beginning with the leftmost exponent bit), the first bit position that differs orders the numbers; there is no need to proceed further with the comparison. A number's true exponent can be determined simply by subtracting the bias value of its format.

The short and long real formats exist in memory only. If a number in one of these formats is loaded into an 80287 register, it is automatically converted to temporary real, the format used for all internal operations. Likewise, data in registers can be converted to short or long real for storage in memory. The temporary real format may be used in memory also, typically to store intermediate results that cannot be held in registers.

Most applications should use the long real form to store real number data and results; it provides sufficient range and precision to return correct results with a minimum of programmer attention. The short real format is appropriate for applications that are constrained by memory, but it should be recognized that this format provides a smaller margin of safety. It is also useful for debugging algorithms, because roundoff problems will manifest themselves more quickly in this format. The temporary real format should normally be reserved for holding intermediate results, loop accumulations, and constants. Its extra length is designed to shield final results from the effects of rounding and overflow/underflow in intermediate calculations. However, the range and precision of the long real form are adequate for most microcomputer applications.

Rounding Control

Internally, the 80287 employs three extra bits (guard, round, and sticky bits) that enable it to represent the infinitely precise true result of a computation; these bits are not accessible to programmers. Whenever the destination can represent the infinitely precise true result, the 80287 delivers it. Rounding occurs in arithmetic and store operations when the format of the destination cannot exactly represent the infinitely precise true result. For example, a real number may be rounded if it is stored in a shorter real format, or in an integer format. Or, the infinitely precise true result may be rounded when it is returned to a register.

The NPX has four rounding modes, selectable by the RC field in the control word (see figure 1-5). Given a true result b that cannot be represented by the target data type, the 80287 determines the two representable numbers a and c that most closely bracket b in value ($a < b < c$). The processor then rounds (changes) b to a or to c according to the mode selected by the RC field as shown in table 1-6. Round introduces an error in a result that is less than one unit in the last place to which the result is rounded. “Round to nearest” is the default mode and is suitable for most applications; it provides the most accurate and statistically unbiased estimate of the true result. The chop mode is provided for integer arithmetic applications.

“Round up” and “round down” are termed directed rounding and can be used to implement interval arithmetic. Interval arithmetic generates a certifiable result independent of the occurrence of rounding and other errors. The upper and lower bounds of an interval may be computed by executing an algorithm twice, rounding up in one pass and down in the other.

Precision Control

The 80287 allows results to be calculated with either 64, 53, or 24 bits of precision in the significand as selected by the precision control (PC) field of the control word. The default setting, and the one that is best suited for most applications, is the full 64 bits of significance provided by the temporary-

Table 1-6. Rounding Modes

| RC Field | Rounding Mode | Rounding Action |
|----------|--------------------------------|---|
| 00 | Round to nearest | Closer to b of a or c ; if equally close, select even number (the one whose least significant bit is zero). |
| 01 | Round down (toward $-\infty$) | a |
| 10 | Round up (toward $+\infty$) | c |
| 11 | Chop (toward 0) | Smaller in magnitude of a or c |

NOTE: $a < b < c$; a and c are representable, b is not.

real format. The other settings are required by the proposed IEEE standard, and are provided to obtain compatibility with the specifications of certain existing programming languages. Specifying less precision nullifies the advantages of the temporary real format's extended fraction length, and does not increase execution speed. When reduced precision is specified, the rounding of the fractional value clears the unused bits on the right to zeros.

Infinity Control

The 80287's system of real numbers may be closed by either of two models of infinity. These two means of closing the number system, projective and affine closure, are illustrated schematically in figure 1-10. The setting of the IC field in the control word selects one model or the other. The default means of closure is projective, and this is recommended for most computations. When projective closure is selected, the NPX treats the special values $+\infty$ and $-\infty$ as a single unsigned infinity (similar to its treatment of signed zeros). In the affine mode the NPX respects the signs of $+\infty$ and $-\infty$.

While affine mode may provide more information than projective, there are occasions when the sign may in fact represent misinformation. For example, consider an algorithm that yields an intermediate result x of $+0$ and -0 (the same numeric value) in different executions. If $1/x$ were then computed in affine mode, two entirely different values ($+\infty$ and $-\infty$) would result from numerically identical values of x . Projective mode, on the other hand, provides less information but never returns misinformation. In general, then, projective mode should be used globally, with affine mode reserved for local computations where the programmer can take advantage of the sign and knows for certain that the nature of the computations will not produce a misleading result.

SPECIAL COMPUTATIONAL SITUATIONS

Besides being able to represent positive and negative numbers, the 80287 data formats may be used to describe other entities. These special values provide extra flexibility, but most users will not need to understand them in order to use the 80287 successfully. This section describes the special values that may occur in certain cases and the significance of each. The 80286 exceptions are also described, for writers of exception handlers and for those interested in probing the limits of computation using the 80287.

The material presented in this section is mainly of interest to programmers concerned with writing exception handlers. For many readers, this section can be browsed lightly.

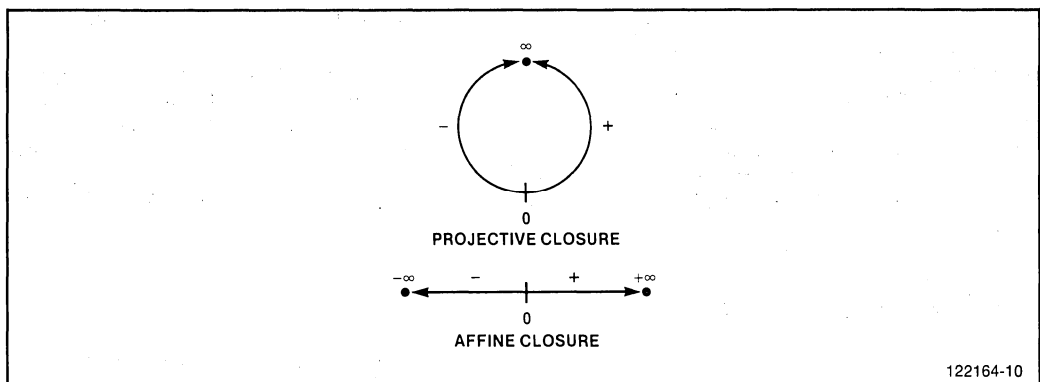


Figure 1-10. Projective versus Affine Closure

Special Numeric Values

The 80287 data formats encompass encodings for a variety of special values in addition to the typical real or integer data values that result from normal calculations. These special values have significance and can express relevant information about the computations or operations that produced them. The various types of special values are

- Non-normal real numbers, including
 - denormals
 - unnormals
- Zeros and pseudo zeros
- Positive and negative infinity
- NaN (Not-a-Number)
- Indefinite

The following description explains the origins and significance of each of these special values. Tables 1-12 through 1-15 at the end of this section show how each of these special values is encoded for each of the numeric data types.

NONNORMAL REAL NUMBERS

As described previously, the 80287 generally stores nonzero real numbers in normalized floating-point form; that is, the integer (leading) bit of the significand is always a 1. This bit is explicitly stored in the temporary real format, and is implicitly assumed to be a one (1 Δ) in the short- and long-real formats. Since leading zeros are eliminated, normalized storage allows the maximum number of significant digits to be held in a significand of a given width.

When a floating-point numeric value becomes very close to zero, normalized storage cannot be used to express the value accurately. To accommodate these instances, the 80287 can store and operate on reals that are not normalized, i.e., whose significands contain one or more leading zeros. Nonnormals typically arise when the result of a calculation yields a value that is too small to be represented in normal form.

Nonnormal values can exist in one of two forms:

- The floating-point exponent may be stored at its most negative value (a *Denormal*),
- The integer bit (and perhaps other leading bits) of the significand may be zero (an *Unnormal*).

The leading zeros of nonnormals permit smaller numbers to be represented, at the cost of some lost precision (the number of significant bits is reduced by the leading zeros). In typical algorithms, extremely small values are most likely to be generated as intermediate, rather than final results. By using the NPX's temporary real format for holding intermediate, values as small as $\pm 3.4 \times 10^{-4932}$ can be represented; this makes the occurrence of nonnormal numbers a rare phenomenon in 80287 applications. Nevertheless, the NPX can load, store, and operate on nonnormalized real numbers when they do occur.

Denormals and Gradual Underflow

A denormal is the result of the NPX's response to an underflow exception when that exception has been masked by the programmer (see the 80287 control word, figure 1-5). Underflow occurs when the absolute value of a real number becomes too small to be represented in the destination format, that is,

when the exponent of the true result is too negative to be represented in the destination format. For example, a true exponent of -130 will cause underflow if the destination is short real, because -126 is the smallest exponent this format can accommodate. No underflow would occur if the destination were long real or temporary real, since these formats can handle exponents down to -1023 and $-16,383$, respectively.

Most computers underflow “abruptly;” they simply return a zero result, which is likely to produce an unacceptable final result if computation continues. The 80287, on the other hand, underflows “gradually” when the underflow exception is masked. Gradual underflow is accomplished by denormalizing the result until it is just within the exponent range of the destination format. Denormalizing means incrementing the true result’s exponent and inserting a corresponding leading zero in the significand, shifting the rest of the significand one place to the right. Denormal values may occur in any of the short-real, long-real, or temporary-real formats. Table 1-7 illustrates how a result might be denormalized to fit a short-real destination.

The intent of the 80287’s masked response to underflow is to allow computation to continue without program intervention, while introducing an error that carries about the same risk of contaminating the final result as roundoff error. Roundoff (precision) errors occur frequently in real number calculations; sometimes they spoil the result of computation, but often they do not. Recognizing that roundoff errors are often nonfatal, computation usually proceeds, and the programmer inspects the final results to see if these errors have had a significant effect. The 80287’s masked underflow response allows programmers to treat underflows in a similar manner; the computation continues and the programmer can examine the final result to determine if an underflow has had important consequences. (If the underflow has had a significant effect, an invalid operation will probably be signalled later in the computation.)

Denormalization produces a denormal or a zero. Denormals are readily identified by their exponents, which are always the minimum for their formats; in biased form, this is always the bit string: 00...00. This same exponent value is also assigned to the zeros, but a denormal has a nonzero significand. A denormal in a register is tagged special. Tables 1-14 and 1-15 later in this chapter show how denormal values are encoded in each of the real data formats.

The denormalization process may cause the loss of low-order significand bits as they are shifted off the right. In a severe case, *all* the significand bits of the true result are shifted out and replaced by the leading zeros. In this case, the result of denormalization is a true zero, and if the value is in a register, it is tagged as such. However, this is a comparatively rare occurrence and, in any case, is no worse than “abrupt” underflow.

Table 1-7. Denormalization Process

| Operation | Sign | Exponent ⁽¹⁾ | Significand |
|--------------------------------|------|-------------------------|-------------------------------|
| True Result | 0 | -129 | $1\Delta 01011100\dots 00$ |
| Denormalize | 0 | -128 | $0\Delta 101011100\dots 00$ |
| Denormalize | 0 | -127 | $0\Delta 0101011100\dots 00$ |
| Denormalize | 0 | -126 | $0\Delta 00101011100\dots 00$ |
| Denormal Result ⁽²⁾ | 0 | -126 | $0\Delta 00101011100\dots 00$ |

NOTES:

⁽¹⁾ Expressed as unbiased, decimal number.

⁽²⁾ Before storing, significand is rounded to 24 bits, integer bit is dropped, and exponent is biased by adding 126.

Denormals are rarely encountered in most applications. Typical debugged algorithms generate extremely small results during the evaluation of intermediate subexpressions; the final result is usually of an appropriate magnitude for its short or long real destination. If intermediate results are held in temporary real, as is recommended, the great range of this format makes underflow very unlikely. Denormals are likely to arise only when an application generates a great many intermediates, so many that they cannot be held on the register stack or in temporary real memory variables. If storage limitations force the use of short or long reals for intermediates, and small values are produced, underflow may occur, and, if masked, may generate denormals.

Accessing a denormal may produce an exception as shown in table 1-8. (The denormalized exception signals that a denormal has been fetched.) Denormals may have reduced significance due to lost low-order bits, and an option of the proposed IEEE standard precludes operations on nonnormalized operands. This option may be implemented in the form of an exception handler that responds to unmasked denormalized exceptions. Most users will mask this exception so that computation may proceed; any loss of accuracy will be analyzed by the user when the final result is delivered.

As table 1-8 shows, the division and remainder operations do not accept denormal divisors and raise the invalid operation exception. Recall also that the transcendental instructions require normalized operands and do *not* check for exceptions. In all other cases, the NPX converts denormals to unnormals, and the rules governing unnormal arithmetic then apply (unnormals are described in the following section).

Unnormals—Descendents of Denormal Operands

An unnormal is the result of a computation using denormal operands and is therefore the descendent of the 80287's masked underflow response. An unnormal may exist only in the temporary real format; it may have any exponent that a normal value may have (that is, in biased form any nonzero value), but it is distinguished from a normal by the integer bit of its significand, which is always 0. An unnormal in a register is tagged valid. Unnormals are distinct from denormals, which have an exponent of 00...00 in biased form.

Unnormals allows arithmetic to continue following an underflow while still retaining their identity as numbers that may have reduced significance. That is, unnormal operands generate unnormal results, so long as their unnormality has a significant effect on the result. Unnormals are thus prevented from "masquerading" as normals, numbers that have full significance. On the other hand, if an unnormal has an insignificant effect on a calculation with a normal, the result will be normal. For example, adding a small unnormal to a large normal yields a normal result. The converse situation yields an unnormal.

Table 1-8. Exceptions Due to Denormal Operands

| Operation | Exception | Masked Response |
|---|-----------|--|
| FLD (short/long real) | D | Load as equivalent unnormal |
| Arithmetic (except following) | D | Convert (in a work area) denormal to equivalent unnormal and proceed |
| Compare and test | D | Convert (in a work area) denormal to equivalent unnormal and proceed |
| Division or FPREM with denormal divisor | I | Return real <i>indefinite</i> |

Table 1-9 shows how the instruction set deals with unnormal operands. Note that the unnormal may be the original operand or a temporary created by the 80287 from a denormal.

ZEROS AND PSEUDO ZEROS

The value *zero* in the real and decimal integer formats may be signed either positive or negative, although the sign of a binary integer zero is always positive. For computational purposes, the value of zero always behaves identically, regardless of sign, and typically the fact that a zero may be signed is transparent to the programmer. If necessary, the FXAM instruction may be used to determine a zero's sign.

The zeros discussed above are called true zeros; if one of them is loaded or generated in a register, the register is tagged zero. Table 1-10 lists the results of instructions executed with zero operands and also shows how a true zero may be created from nonzero operands.

Only the temporary real format may contain a special class of values called pseudo zeros. A pseudo zero is an unnormal whose significand is all zeros, but whose (biased) exponent is nonzero (true zeros have a zero exponent). Neither is a pseudo zero's exponent all ones, since this encoding is reserved for infinities and NaNs. A pseudo zero result will be produced if two unnormals, containing a total of more than 64 leading zero bits in their significands, are multiplied together. This is a remote possibility in most applications, but it can happen.

Pseudo zero operands behave like unnormals, except in the following cases where they produce the same results as true zeros:

- Compare and test instructions
- FRNDINT (round to integer)
- Division, where the dividend is either a true zero or a pseudo zero (the divisor is a pseudo zero)

Table 1-9. Unnormal Operands and Results

| Operation | Result |
|---|---|
| Addition/subtraction | Normalization of operand with larger absolute value determines normalization of result. |
| Multiplication | If either operand is unnormal, result is unnormal. |
| Division (unnormal dividend only) | Result is unnormal. |
| FPREM (unnormal dividend only) | Result if normalized. |
| Division/FPREM (unnormal divisor) | Signal invalid operation. |
| Compare/FTST | Normalize as much as possible before making comparison. |
| FRNDINT | Normalize as much as possible before rounding. |
| FSQRT | Signal invalid operation. |
| FST, FSTP (short/long real destination) | If value is above destination's underflow boundary, then signal invalid operation; else signal underflow. |
| FSTP (temporary real destination) | Store as usual. |
| FIST, FISTP, FBSTP | Signal invalid operation. |
| FLD | Load as usual. |
| FXCH | Exchange as usual. |
| Transcendental instructions | Undefined; operands must be normal and are not checked. |

In addition and subtraction of a pseudo zero and a true zero or another pseudo zero, the pseudo zero(s) behaves like unnormals, except for the determination of the result's sign. The sign is determined as shown in table 1-10 for two true zero operands.

Table 1-10. Zero Operands and Results

| Operation/Operands | Result | Operation/Operands | Result |
|--|------------------------------|--|------------------------------|
| FLD, FBLD ⁽¹⁾ | | Division | |
| +0 | +0 | $\pm 0 \div \pm 0$ | Invalid operation |
| -0 | -0 | $\pm X \div \pm 0$ | Zerodivide |
| FILD ⁽²⁾ | | $+0 \div +X, -0 \div -X$ | +0 |
| +0 | +0 | $+0 \div -X, -0 \div +X$ | -0 |
| FST, FSTP | | $-X \div -Y, +X \div +Y$ | +0, underflow ⁽⁸⁾ |
| +0 | +0 | $-X \div +Y, +X \div -Y$ | -0, underflow ⁽⁸⁾ |
| -0 | -0 | | |
| +X ⁽³⁾ | +0 | FPREM | |
| -X ⁽³⁾ | -0 | $\pm 0 \text{ rem } \pm 0$ | Invalid operation |
| FBSTP | | $\pm X \text{ rem } \pm 0$ | Invalid operation |
| +0 | +0 | $+0 \text{ rem } +X, +0 \text{ rem } -X$ | +0 |
| -0 | -0 | $-0 \text{ rem } +X, -0 \text{ rem } -X$ | -0 |
| FIST, FISTP | | $+X \text{ rem } +Y, +X \text{ rem } -Y$ | +0 ⁽⁹⁾ |
| +0 | +0 | $-X \text{ rem } -Y, -X \text{ rem } +Y$ | -0 ⁽⁹⁾ |
| -0 | +0 | | |
| +X ⁽⁴⁾ | +0 | FSQRT | |
| -X ⁽⁴⁾ | +0 | -0 | -0 |
| | | +0 | +0 |
| Addition | | Compare | |
| +0 plus +0 | +0 | $\pm 0: +X$ | A < B |
| -0 plus -0 | -0 | $\pm 0: \pm 0$ | A = B |
| +0 plus -0, -0 plus +0 | *0 ⁽⁵⁾ | $\pm 0: -X$ | A > B |
| -X plus +X, +X plus -X | *0 ⁽⁵⁾ | | |
| ± 0 plus $\pm X, \pm X$ plus ± 0 | $\pm X$ ⁽⁶⁾ | FTST | |
| | | ± 0 | Zero |
| Subtraction | | FCHS | |
| +0 minus -0 | +0 | +0 | -0 |
| -0 minus +0 | -0 | +0 | +0 |
| +0 minus +0, -0 minus -0 | *0 ⁽⁵⁾ | FABS | |
| +X minus +X, -X minus -X | *0 ⁽⁵⁾ | ± 0 | +0 |
| ± 0 minus $\pm X, \pm X$ minus ± 0 | $\pm X$ ⁽⁶⁾ | F2XM1 | |
| | | +0 | +0 |
| Multiplication | | -0 | -0 |
| +0 • +0, -0 • -0 | +0 | FRNDINT | |
| +0 • -0, -0 • +0 | -0 | +0 | +0 |
| +0 • +X, +X • +0 | +0 | -0 | -0 |
| +0 • -X, -X • +0 | -0 | EXTRACT | |
| -0 • +X, +X • -0 | -0 | +0 | Both +0 |
| -0 • -X, -X • -0 | +0 | -0 | Both -0 |
| +X • +Y, -X • -Y | +0, underflow ⁽⁷⁾ | | |
| +X • -Y, -X • +Y | -0, underflow ⁽⁷⁾ | | |

NOTES:

- (1) Arithmetic and compare operations with real memory operands interpret the memory operand signs in the same way.
- (2) Arithmetic and compare operations with binary integers interpret the integer sign in the same manner.
- (3) Severe underflows in storing to short or long real may generate zeros.
- (4) Small values ($|x| < 1$) stored into integers may round to zero.

- (5) Sign is determined by round mode:
 - * = + for nearest, up, or chop
 - * = - for down
- (6) † = sign of X.
- (7) Very small values of X and Y may yield zeros, after rounding of true result. NPX signals underflow to warn that zero has been yielded by nonzero operands.
- (8) Very small X and very large Y may yield zero, after rounding of true result. NPX signals underflow to warn that zero has been yielded from nonzero operands.
- (9) When Y divides into X exactly.

INFINITY

The real formats support signed representations of infinities. These values are encoded with a biased exponent of all ones and a significand of $1\Delta 00...00$; if the infinity is in a register, it is tagged special. The significand distinguishes infinities from NaNs, including real *indefinite*.

A programmer may code an infinity, or it may be created by the NPX as its masked response to an overflow or a zero divide exception. Note that when rounding is up or down, the masked response may create the largest valid value representable in the destination rather than infinity. See table 1-11 for details. As operands, infinities behave somewhat differently depending on how the infinity control field in the control word is set (see table 1-12). When the projective model of infinity is selected, the infinities behave as a single unsigned representation; because of this, infinity cannot be compared with any value except infinity. In affine mode, the signs of the infinities are observed, and comparisons are possible.

NaN (NOT A NUMBER)

A NaN (Not a Number) is a member of a class of special values that exist in the real formats only. A NaN has an exponent of $11..11B$, may have either sign, and may have any significand except $1\Delta 00..00B$, which is assigned to the infinities. A NaN in a register is tagged special.

The 80287 will generate the special NaN, real *indefinite*, as its masked response to an invalid operation exception. This NaN is signed negative; its significand is encoded $1\Delta 100..00$. All other NaNs represent programmer-created values.

Whenever the NPX uses an operand that is a NaN, it signals an invalid operation exception in its status word. If this exception is masked in the 80287 control word, the 80287's masked exception response is to return the NaN as the operation result. If both operands of an instruction are NaNs, the result is the NaN with the larger absolute value. In this way, a NaN that enters a computation propagates through the computation and will eventually be delivered as the final result. Note, however, that the transcendental instructions do not check their operands, and a NaN will produce an undefined result.

By unmasking the invalid operation exception, the programmer can use NaNs to trap to the exception handler. The generality of this approach and the large number of NaN values that are available provide the sophisticated programmer with a tool that can be applied to a variety of special situations.

For example, a compiler could use NaNs as references to uninitialized (real) array elements. The compiler could preinitialize each array element with a NaN whose significand contained the index (relative position) of the element. If an application program attempted to access an element that it had not initialized, it would use the NaN placed there by the compiler. If the invalid operation exception were unmasked, an interrupt would occur, and the exception handler would be invoked. The exception

handler could determine which element had been accessed, since the operand address field of the exception pointers would point to the NaN, and the NaN would contain the index number of the array element.

NaNs could also be used to speed up debugging. In its early testing phase, a program often contains multiple errors. An exception handler could be written to save diagnostic information in memory whenever it was invoked. After storing the diagnostic data, it could supply a NaN as the result of the erroneous instruction, and that NaN could point to its associated diagnostic area in memory. The program would then continue, creating a different NaN for each error. When the program ended, the NaN results could be used to access the diagnostic data saved at the time the errors occurred. Many errors could thus be diagnosed and corrected in one test run.

Table 1-11. Masked Overflow Response with Directed Rounding

| True Result | | Rounding Mode | Result Delivered |
|---------------|------|---------------|---|
| Normalization | Sign | | |
| Normal | + | Up | $+\infty$ |
| Normal | + | Down | Largest finite positive number ⁽¹⁾ |
| Normal | - | Up | Largest finite negative number ⁽¹⁾ |
| Normal | - | Down | $-\infty$ |
| Unnormal | + | Up | $+\infty$ |
| Unnormal | - | Down | Largest exponent, result's significand ⁽²⁾ |
| Unnormal | + | Up | Largest exponent, result's significand ⁽²⁾ |
| Unnormal | - | Down | $-\infty$ |

NOTES:

⁽¹⁾ The largest valid representable reals are encoded:
 exponent: 11...10B
 significand: (1)_Δ11...10B

⁽²⁾ The significand retains its identity as an unnormal; the true result is rounded as usual (effectively chopped toward 0 in this case). The exponent is encoded 11...10B.

Table 1-12. Infinity Operands and Results

| Operation | Projective Result | Affine Result |
|---------------------------|-------------------|-------------------|
| Addition | | |
| $+\infty$ plus $+\infty$ | Invalid operation | $+\infty$ |
| $-\infty$ plus $-\infty$ | Invalid operation | $-\infty$ |
| $+\infty$ plus $-\infty$ | Invalid operation | Invalid operation |
| $-\infty$ plus $+\infty$ | Invalid operation | Invalid operation |
| $\pm\infty$ plus $\pm X$ | $*\infty$ | $*\infty$ |
| $\pm X$ plus $\pm\infty$ | $*\infty$ | $*\infty$ |
| Subtraction | | |
| $+\infty$ minus $-\infty$ | Invalid operation | $+\infty$ |
| $-\infty$ minus $+\infty$ | Invalid operation | $-\infty$ |
| $+\infty$ minus $+\infty$ | Invalid operation | Invalid operation |
| $-\infty$ minus $-\infty$ | Invalid operation | Invalid operation |
| $\pm\infty$ minus $\pm X$ | $*\infty$ | $*\infty$ |
| $\pm X$ minus $\pm\infty$ | $\dagger\infty$ | $\dagger\infty$ |

Table 1-12. Infinity Operands and Results (Cont'd.)

| Operation | Projective Result | Affine Result |
|--|---|---|
| Multiplication $\pm\infty \cdot \pm\infty$ $\pm\infty \cdot \pm Y$ $\pm 0 \cdot \pm\infty, \pm\infty * \pm 0$ | \oplus \oplus Invalid operation | \oplus \oplus Invalid operation |
| Division $\pm\infty \div \pm\infty$ $\pm\infty \div \pm X$ $\pm X \div \pm\infty$ | Invalid operation \oplus \oplus | Invalid operation \oplus \oplus |
| FSQRT $-\infty$ $+\infty$ | Invalid operation Invalid operation | Invalid operation $+\infty$ |
| FPREM $\pm\infty \text{ rem } \pm\infty$ $\pm\infty \text{ rem } \pm X$ $\pm Y \text{ rem } \pm\infty$ $\pm 0 \text{ rem } \pm\infty$ | Invalid operation Invalid operation $*Y$ $*0$ | Invalid operation Invalid operation $*Y$ $*0$ |
| FRNDINT $\pm\infty$ | $*\infty$ | $*\infty$ |
| FSCALE $\pm\infty$ scaled by $\pm\infty$ $\pm\infty$ scaled by $\pm X$ ± 0 scaled by $\pm\infty$ $\pm Y$ scaled by $\pm\infty$ | Invalid operation $*\infty$ $*0$ Invalid operation | Invalid operation $*\infty$ $*0$ Invalid operation |
| FXTRACT $\pm\infty$ | Invalid operation | Invalid operation |
| Compare $\pm\infty: \pm\infty$ $\pm\infty: \pm Y$ $\pm\infty: \pm 0$ | $A = B$ $A ? B$ (and) invalid operation $A ? B$ (and) invalid operation | $-\infty < +\infty$ $-\infty < Y < +\infty$ $-\infty < 0 < +\infty$ |
| FTST $\pm\infty$ | $A ? B$ (and) invalid operation | $*\infty$ |

NOTES:

X = zero or nonzero operand

Y = nonzero operand

* = sign of original operand

† = sign is complement of original operand's sign

\oplus = sign is "exclusive or" original operand signs (+ if operands had same sign, - if operands had different signs)

INDEFINITE

For every 80287 numeric data type, one unique encoding is reserved for representing the special value *indefinite*. The 80287 produces this encoding as its response to a masked invalid-operation exception. In the case of reals, the indefinite value can be stored and loaded like any NaN, and it always retains its special identity; programmers are advised not to use this encoding for any other purpose. Packed decimal *indefinite* may be stored by the NPX in a FBSTP instruction; attempting to use this encoding in a FBLD instruction, however, will have an undefined result. In the binary integers, the same encod-

ing may represent either *indefinite* or the largest negative number supported by the format (-2^{15} , -2^{31} , or -2^{63}). The 80287 will store this encoding as its masked response to an invalid operation, or when the value in a source register represents or rounds to the largest negative integer representable by the destination. In situations where its origin may be ambiguous, the invalid operation exception flag can be examined to see if the value was produced by an exception response. When this encoding is loaded, or used by an integer arithmetic or compare operation, it is always interpreted as a negative number; thus *indefinite* cannot be loaded from a packed decimal or binary integer.

ENCODING OF DATA TYPES

Tables 1-13 through 1-16 show how each of the special values just described is encoded for each of the numeric data types. In these tables, the least-significant bits are shown to the right and are stored in the lowest memory addresses. The sign bit is always the left-most bit of the highest-addressed byte.

Table 1-13. Binary Integer Encodings

| Class | | Sign | Magnitude |
|-----------|-------------------------------|------------------|------------------------|
| Positives | (Largest) | 0 • • • | 11...11 • • • |
| | (Smallest) | 0 | 00...01 |
| Zero | | 0 | 00...00 |
| Negatives | (Smallest) | 1 • • • | 11...11 • • • |
| | (Largest/ <i>Indefinite</i>) | 1 | 00...00 |

Word: ← 15 bits →

Short: ← 31 bits →

Long: ← 63 bits →

NOTES:

If this encoding is used as a source operand (as in an integer load or integer arithmetic instruction), the 80287 interprets it as the largest negative number representable in the format: -2^{15} , -2^{31} , or -2^{63} . The 80287 will deliver this encoding to an integer destination in two cases:

- 1) If the result is the largest negative number
- 2) As the response to a masked invalid operation exception, in which case it represents the special value *integer indefinite*.

Table 1-14. Packed Decimal Encodings

| Class | | Sign | | Magnitude | | | | | |
|--------------------------------|------------|------|---------|-----------|---------|----------------------|---------|-----|---------|
| | | | | digit | digit | digit | digit | ... | digit |
| Positives | (Largest) | 0 | 0000000 | 1 0 0 1 | 1 0 0 1 | 1 0 0 1 | 1 0 0 1 | ... | 1 0 0 1 |
| | | • | • | | | | • | | |
| | | • | • | | | | • | | |
| | (Smallest) | 0 | 0000000 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | ... | 0 0 0 1 |
| | Zero | 0 | 0000000 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | ... | 0 0 0 0 |
| Negatives | Zero | 1 | 0000000 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | ... | 0 0 0 0 |
| | (Smallest) | 1 | 0000000 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | 0 0 0 0 | ... | 0 0 0 1 |
| | | • | • | | | | • | | |
| | | • | • | | | | • | | |
| | (Largest) | 1 | 0000000 | 1 0 0 1 | 1 0 0 1 | 1 0 0 1 | 1 0 0 1 | ... | 1 0 0 1 |
| <i>Indefinite</i> ¹ | | 1 | 1111111 | 1 1 1 1 | 1 1 1 1 | U U U U ² | U U U U | ... | U U U U |

← 1 byte →

← 9 bytes →

NOTES:

1. The *packed decimal indefinite* encoding is stored by FBSTP in response to a masked invalid operation exception. Attempting to load this value via FBLD produces an undefined result.
2. UUUU means bit values are undefined and may contain any value.

Table 1-15. Real and Long Real Encodings

| Class | | Sign | Biased Exponent | Significand* Δ ff...ff | |
|-----------|------------|---------|-----------------|----------------------------------|---------|
| Positives | NaNs | 0 | 11...11 | 11...11 | |
| | | • | • | • | |
| | ∞ | 0 | 11...11 | 00...00 | |
| | | • | • | • | |
| | Reals | Normals | 0 | 11...10 | 11...11 |
| | | | • | • | • |
| Denormals | | 0 | 00...00 | 11...11 | |
| | | • | • | • | |
| Negatives | Zero | 0 | 00...00 | 00...00 | |
| | | 1 | 00...00 | 00...00 | |
| | Denormals | 1 | 00...00 | 00...01 | |
| | | • | • | • | |
| Normals | 1 | 00...00 | 11...11 | | |
| | • | • | • | | |
| NaNs | ∞ | 1 | 11...11 | 00...00 | |
| | | • | • | • | |
| | Indefinite | 1 | 11...11 | 00...01 | |
| | | • | • | • | |
| | | 1 | 11...11 | 10...00 | |
| | | • | • | • | |
| | | • | • | • | |
| | | • | • | • | |
| | | 1 | 11...11 | 11...11 | |

*Integer bit is implied and not stored.

Short: 8 bits

Long: 11 bits

23 bits

52 bits

Table 1-16. Temporary Real Encodings

| Class | | Sign | Biased Exponent | Significand* Δ ff...ff | |
|-----------|----------|-----------------------|-----------------|------------------------------------|---------------------|
| Positives | NaNs | 0 | 11...11 | 111...11 | |
| | | • | • | • | |
| | • | • | • | • | |
| | • | • | • | • | |
| | 0 | 11...11 | 100...01 | | |
| | ∞ | 0 | 11...11 | 100...00 | |
| | Reals | | 0 | 11...10 | Normals 111...11 |
| | | | • | • | • |
| | | | • | • | • |
| | | | • | • | • |
| • | | | • | • | |
| • | | | • | • | |
| • | | | • | • | |
| • | | | • | • | |
| • | | | • | • | |
| 0 | | | 00...01 | Unnormals 011...11 | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| 0 | 00...00 | Denormals 011...11 | | | |
| • | • | • | | | |
| • | • | • | | | |
| 0 | 00...00 | 000...01 | | | |
| Zero | 0 | 00...00 | 000...00 | | |
| Zero | 1 | 00...00 | 000...00 | | |
| Negatives | | 1 | 00...00 | Denormals 000...01 | |
| | | • | • | • | |
| | | • | • | • | |
| | | • | • | • | |
| | | 1 | 00...00 | 011...11 | |
| | | • | • | • | |
| | | • | • | • | |
| | | • | • | • | |
| | | • | • | • | |
| | | • | • | • | |
| 1 | 00...01 | Unnormals 000...00 | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| 1 | 11...10 | Normals 100...00 | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| • | • | • | | | |
| 1 | 11...10 | 111...11 | | | |

Table 1-16. Temporary Real Encodings (Cont'd.)

| Class | | Sign | Biased Exponent | Significand* Δff...ff |
|-------------------|------|---------|-----------------|---------------------------|
| Negatives | ∞ | 1 | 11...11 | 100...00 |
| | NaNs | 1 | 11...11 | 100...00 |
| | | • | • | • |
| | | • | • | • |
| | | • | • | • |
| <i>Indefinite</i> | 1 | 11...11 | 110...00 | |
| | • | • | • | |
| | • | • | • | |
| | • | • | • | |
| | 1 | 11...11 | 111...11 | |

← 15 bits ← 64 bits →

Numeric Exceptions

Whenever the 80287 NPX attempts a numeric operation with invalid operands or produces a result that cannot be represented, the 80287 recognizes a numeric exception condition. Altogether, the 80287 checks for the following six classes of exceptions while executing numeric instructions:

1. Invalid operation
2. Divide-by-zero
3. Denormalized operand
4. Numeric overflow
5. Numeric underflow
6. Inexact result (precision)

INVALID OPERATION

The 80287 reports an invalid operation if any of the following occurs:

- An attempt to load a register that is not empty (stack overflow).
- An attempt to pop an operand from an empty register (stack underflow).
- An operand is a NaN.
- The operands cause the operation to be indeterminate (square root of a negative number, 0/0).

An invalid operation generally indicates a program error.

ZERO DIVISOR

If an instruction attempts to divide a finite nonzero operand by zero, the 80287 will report a zero divide exception.

DENORMALIZED OPERAND

If an instruction attempts to operate on a denormal, the NPX reports the denormalized operand exception. This exception allows users to implement in software an option of the proposed IEEE standard specifying that operands must be prenormalized before they are used.

NUMERIC OVERFLOW AND UNDERFLOW

If the exponent of a numeric result is too large for the destination real format, the 80287 signals a numeric overflow. Conversely, if the exponent of a result is too small to be represented in the destination format, a numeric underflow is signaled. If either of these exceptions occur, the result of the operation is outside the range of the destination real format.

Typical algorithms are most likely to produce extremely large and small numbers in the calculation of intermediate, rather than final, results. Because of the great range of the temporary real format (recommended as the destination format for intermediates), overflow and underflow are relatively rare events in most 80287 applications.

INEXACT RESULT

If the result of an operation is not exactly representable in the destination format, the 80287 rounds the number and reports the precision exception. For example, the fraction $\frac{1}{3}$ cannot be precisely represented in binary form. This exception occurs frequently and indicates that some (generally acceptable) accuracy has been lost; it is provided for applications that need to perform exact arithmetic only.

HANDLING NUMERIC ERRORS

When numeric errors occur, the NPX takes one of two possible courses of action:

- The NPX can itself handle the error, producing the most reasonable result and allowing numeric program execution to continue undisturbed.
- A software exception handler can be invoked by the CPU to handle the error.

Each of the six exception conditions described above has a corresponding flag bit in the 80287 status word and a mask bit in the 80287 control word. If an exception is masked (the corresponding mask bit in the control word = 1), the 80287 takes an appropriate default action and continues with the computation. If the exception is unmasked (mask=0), the 80287 asserts the $\overline{\text{ERROR}}$ output to the 80286 to signal the exception and invoke a software exception handler.

The NPX reports an exception by setting the corresponding flag in the NPX status word to 1. The NPX then checks the corresponding exception mask in the control word to determine if it should “field” the exception (mask=1), or if it should signal the exception to the CPU to invoke a software exception handler (mask=0).

If the mask is set, the exception is said to be *masked* (from user software), and the NPX executes its on-chip masked response for that exception. If the mask is not set (mask=0), the exception is *unmasked*, and the NPX performs its unmasked response. The masked response always produces a standard result, then proceeds with the instruction. The unmasked response always traps to a software exception handler, allowing the CPU to recognize and take action on the exception. Table 1-17 gives a complete description of all exception conditions and the NPX’s masked response.

Table 1-17. Exception Conditions and Masked Responses

| Condition | Masked Response |
|---|--|
| Invalid Operation | |
| <p>Source register is tagged empty (usually due to stack underflow).</p> <p>Destination register is not tagged empty (usually due to stack overflow).</p> <p>One or both operands is a NaN.</p> <p>(Compare and test operations only): one or both operands is a NaN.</p> <p>(Addition operations only): closure is affine and operands are opposite-signed infinities; or closure is projective and both operands are ∞ (signs immaterial).</p> <p>(Subtraction operations only): closure is affine and operands are like-signed infinities; or closure is projective and both operands are ∞ (signs immaterial).</p> <p>(Multiplication operations only): $\infty * 0$; or $0 * \infty$.</p> <p>(Division operations only): $\infty \div \infty$; or $0 \div 0$; or $0 \div$ pseudo zero; or divisor is denormal or unnormal.</p> <p>(FPREM instruction only): modulus (divisor) is unnormal or denormal; or dividend is ∞.</p> <p>(FSQRT instruction only): operand is nonzero and negative; or operand is denormal or unnormal; or closure is affine and operand is $-\infty$; or closure is projective and operand is ∞.</p> <p>(Compare operations only): closure is projective and ∞ is being compared with 0, a normal, or ∞.</p> <p>(FTST instruction only): closure is projective and operand is ∞.</p> <p>(FIST, FISTP instructions only): source register is empty, a NaN, denormal, unnormal, ∞, or exceeds representable range of destination.</p> <p>(FBSTP instruction only): source register is empty, a NaN, denormal, unnormal, ∞, or exceeds 18 decimal digits.</p> <p>(FST, FSTP instructions only): destination is short or long real and source register is an unnormal with exponent in range.</p> <p>(FXCH instruction only): one or both registers is tagged empty.</p> | <p>Return real <i>indefinite</i>.</p> <p>Return real <i>indefinite</i> (overwrite destination value).</p> <p>Return NaN with larger absolute value (ignore signs).</p> <p>Set condition codes "not comparable."</p> <p>Return real <i>indefinite</i>.</p> <p>Return real <i>indefinite</i>.</p> <p>Return real <i>indefinite</i>.</p> <p>Return real <i>indefinite</i>.</p> <p>Return real <i>indefinite</i>, set condition code = "complete remainder."</p> <p>Return real <i>indefinite</i>.</p> <p>Set condition code = "not comparable."</p> <p>Set condition code = "not comparable."</p> <p>Store integer <i>indefinite</i>.</p> <p>Stored packed decimal <i>indefinite</i>.</p> <p>Store real <i>indefinite</i>.</p> <p>Change empty register(s) to real <i>indefinite</i> and then perform exchange.</p> |

Table 1-17. Exception Conditions and Masked Responses (Cont'd.)

| Condition | Masked Response |
|---|--|
| Denormalized Operand | |
| <p>(FLD instruction only): source operand is denormal.</p> <p>(Arithmetic operations only): one or both operands is denormal.</p> <p>(Compare and test operations only): one or both operands is denormal or <i>unnormal</i> (other than pseudo zero).</p> | <p>No special action; load as usual.</p> <p>Convert (in a work area) the operand to the equivalent unnormal and proceed.</p> <p>Convert (in a work area) any denormal to the equivalent unnormal; normalize as much as possible, and proceed with operation.</p> |
| Zero Divide | |
| <p>(Division operations only): divisor = 0.</p> | <p>Return ∞ signed with "exclusive or" of operand signs.</p> |
| Overflow | |
| <p>(Arithmetic operations only): rounding is nearest or chop, and exponent of true result > 16,383.</p> <p>(FST, FSTP instructions only): rounding is nearest or chop, and exponent of true result > +127 (short real destination) or > +1023 (long real destination).</p> | <p>Return properly signed ∞ and signal precision exception.</p> <p>Return properly signed ∞ and signal precision exception.</p> |
| Underflow | |
| <p>(Arithmetic operations only): exponent of true result < -16,382 (true).</p> <p>(FST, FSTP instructions only): destination is short real and exponent of true result < -126 (true).</p> <p>(FST, FSTP instructions only): destination is long real and exponent of true result < -1022 (true).</p> | <p>Denormalize until exponent rises to -16,382 (true), round significand to 64 bits. If denormalized rounded significand = 0, then return true 0; else, return denormal (tag = special, biased exponent = 0).</p> <p>Denormalize until exponent rises to -126 (true), round significand to 24 bits, store true 0 if denormalized rounded significand = 0; else, store denormal (biased exponent = 0).</p> <p>Denormalize until exponent rises to -1022 (true), round significand to 53 bits, store true 0 if rounded denormalized significand = 0; else, store denormal (biased exponent = 0).</p> |
| Precision | |
| <p>True rounding error occurs.</p> <p>Masked response to overflow exception earlier in instruction.</p> | <p>No special action.</p> <p>No special action.</p> |

Note that when exceptions are masked, the NPX may detect multiple exceptions in a single instruction, because it continues executing the instruction after performing its masked response. For example, the 80287 could detect a denormalized operand, perform its masked response to this exception, and then detect an underflow.

Automatic Exception Handling

As described in the previous section, when the 80287 NPX encounters an exception condition whose corresponding mask bit in the NPX control word is set, the NPX automatically performs an internal fix-up (masked-exception) response. The 80287 NPX has a default fix-up activity for every possible exception condition it may encounter. These masked-exception responses are designed to be safe and are generally acceptable for most numeric applications.

As an example of how even severe exceptions can be handled safely and automatically using the NPX's default exception responses, consider a calculation of the parallel resistance of several values using only the standard formula (figure 1-11). If R_1 becomes zero, the circuit resistance becomes zero. With the divide-by-zero and precision exceptions masked, the 80287 NPX will produce the correct result.

By masking or unmasking specific numeric exceptions in the NPX control word, NPX programmers can delegate responsibility for most exceptions to the NPX, reserving the most severe exceptions for programmed exception handlers. Exception-handling software is often difficult to write, and the NPX's masked responses have been tailored to deliver the most reasonable result for each condition. For the majority of applications, programmers will find that masking all exceptions other than Invalid Operation will yield satisfactory results with the least programming effort. An Invalid Operation exception normally indicates a fatal error in a program that must be corrected; this exception should not normally be masked.

The exception flags in the NPX status word provide a cumulative record of exceptions that have occurred since these flags were last cleared. Once set, these flags can be cleared only by executing the FCLEX (clear exceptions) instruction, by reinitializing the NPX, or by overwriting the flags with an FRSTOR or FLDENV instruction. This allows a programmer to mask all exceptions (except invalid operation), run a calculation, and then inspect the status word to see if any exceptions were detected at any point in the calculation.

Software Exception Handling

If the NPX encounters an unmasked exception condition, it signals the exception to the 80286 CPU using the **ERROR** status line between the two processors.

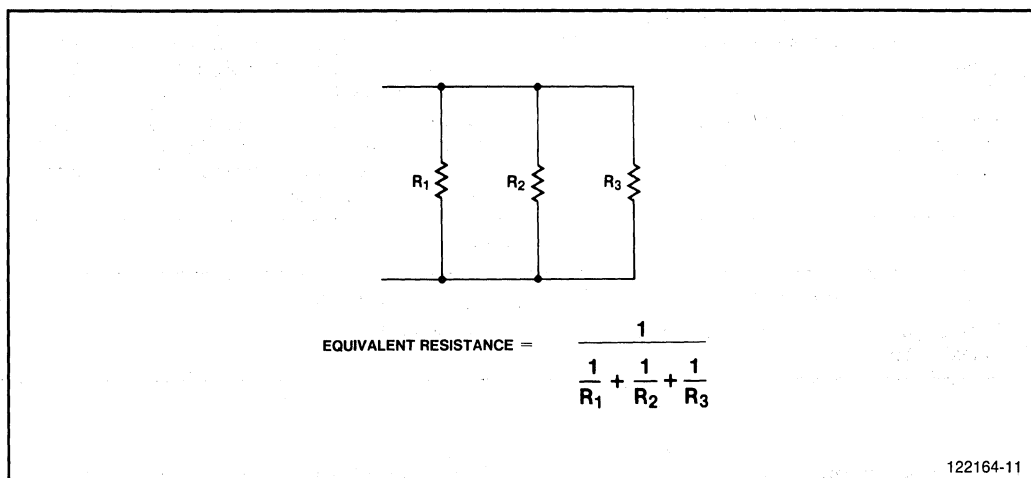


Figure 1-11. Arithmetic Example Using Infinity

The next time the 80286 CPU encounters a WAIT or ESC instruction in its instruction stream, the 80286 will detect the active condition of the ERROR status line and automatically trap to an exception response routine using interrupt #16—the Processor Extension Error exception.

This exception response routine is typically a part of the systems software. Typical exception responses may include

- Incrementing an exception counter for later display or printing
- Printing or displaying diagnostic information (e.g., the 80287 environment and registers)
- Aborting further execution
- Using the exception pointers to build an instruction that will run without exception and executing it

Application programmers on iAPX 286 systems having systems software support for the 80287 NPX should consult their references for the appropriate system response to NPX exceptions. For systems programmers, specific details on writing software exception handlers are included in the section “System-Level Numeric Programming” later in this supplement.

The 80287 NPX differs from the 8087 NPX in the manner in which numeric exceptions are signalled to the CPU; the 8087 requires an interrupt controller (8259A) to interrupt the CPU, while the 80287 does not. Programmers upgrading iAPX 86/20 software to operate on iAPX 286 systems should be aware of these differences and any implications they might have on numeric exception-handling software. Appendix B explains the differences between the 80287 and the 8087 NPX in greater detail.

*Programming
Numeric Applications*

CHAPTER 2

PROGRAMMING NUMERIC APPLICATIONS

Programmers developing applications for the 80287 have a wide range of instructions and programming alternatives from which to choose.

The following sections describe the 80287 instruction set in detail, and follow up with a discussion of several of the programming facilities that are available to programmers of iAPX 286/20 systems.

THE 80287 NPX INSTRUCTION SET

This section describes the operation of all 80287 instructions. Within this section, the instructions are divided into six functional classes:

- Data Transfer instructions
- Arithmetic instructions
- Comparison instructions
- Transcendental instructions
- Constant instructions
- Processor Control instructions

At the end of this section, each of the instructions is described in terms of its execution speed, bus transfers, and exceptions, as well as a coding example for each combination of operands accepted by the instruction. For easy reference, this information is concentrated into a table, organized alphabetically by instruction mnemonic.

Throughout this section, the instruction set is described as it appears to the ASM286 programmer who is coding a program. Appendix A covers the actual machine instruction encodings, which are principally of use to those reading unformatted memory dumps, monitoring instruction fetches on the bus, or writing exception handlers.

Compatibility with the 8087 NPX

The instruction set for the 80287 NPX is largely the same as that for the 8087 NPX used with iAPX 86 and 88 systems. Most object programs generated for iAPX 86/20 systems (8086 and 8087) will execute without change on iAPX 286/20 systems. Several instructions are new to the 80287, and several 8087 instructions perform no useful function on the 80287. Appendix B at the back of this supplement gives details of these instruction set differences and of the differences in the ASM86 and ASM286 assemblers.

Numeric Operands

The typical NPX instruction accepts one or two operands as inputs, operates on these, and produces a result as an output. Operands are most often (the contents of) register or memory locations. The operands of some instructions are predefined; for example, FSQRT always takes the square root of the number in the top stack element. Others allow, or require, the programmer to explicitly code the operand(s) along with the instruction mnemonic. Still others accept one explicit operand and one implicit operand, which is usually the top stack element.

Whether supplied by the programmer or utilized automatically, the two basic types of operands are *sources* and *destinations*. A source operand simply supplies one of the inputs to an instruction; it is not altered by the instruction. Even when an instruction converts the source operand from one format to another (e.g., real to integer), the conversion is actually performed in an internal work area to avoid altering the source operand. A destination operand may also provide an input to an instruction. It is distinguished from a source operand, however, because its content may be altered when it receives the result produced by the operation; that is, the destination is replaced by the result.

Many instructions allow their operands to be coded in more than one way. For example, FADD (add real) may be written without operands, with only a source or with a destination and a source. The instruction descriptions in this section employ the simple convention of separating alternative operand forms with slashes; the slashes, however, are not coded. Consecutive slashes indicate an option of no explicit operands. The operands for FADD are thus described as

```
//source/destination, source
```

This means that FADD may be written in any of three ways:

```
FADD
FADD source
FADD destination, source
```

When reading this section, it is important to bear in mind that memory operands may be coded with any of the CPU's memory addressing modes. To review these modes—direct, register indirect, based, indexed, based indexed—refer to the *iAPX 286 Programmer's Reference Manual*. Table 2-17 later in this chapter also provides several addressing mode examples.

Data Transfer Instructions

These instructions (summarized in table 2-1) move operands among elements of the register stack, and between the stack top and memory. Any of the seven data types can be converted to temporary real and loaded (pushed) onto the stack in a single operation; they can be stored to memory in the same manner. The data transfer instructions automatically update the 80287 tag word to reflect the register contents following the instruction.

Table 2-1. Data Transfer Instructions

| Real Transfers | |
|----------------------------|---|
| FLD FST FSTP FXCH | Load real Store real Store real and pop Exchange registers |
| Integer Transfers | |
| FILD FIST FISTP | Integer load Integer store Integer store and pop |
| Packed Decimal Transfers | |
| FBLD FBSTP | Packed decimal (BCD) load Packed decimal (BCD) store and pop |

FLD source

FLD (load real) loads (pushes) the source operand onto the top of the register stack. This is done by decrementing the stack pointer by one and then copying the content of the source to the new stack top. The source may be a register on the stack (ST(i)) or any of the real data types in memory. Short and long real source operands are converted to temporary real automatically. Coding FLD ST(0) duplicates the stack top.

FST destination

FST (store real) transfers the stack top to the destination, which may be another register on the stack or a short or long real memory operand. If the destination is short or long real, the significand is rounded to the width of the destination according to the RC field of the control word, and the exponent is converted to the width and bias of the destination format.

If, however, the stack top is tagged special (it contains ∞ , a NaN, or a denormal) then the stack top's significand is not rounded but is chopped (on the right) to fit the destination. Neither is the exponent converted, but it also is chopped on the right and transferred "as is." This preserves the value's identification as ∞ or a NaN (exponent all ones) or a denormal (exponent all zeros) so that it can be properly loaded and tagged later in the program if desired.

FSTP destination

FSTP (store real and pop) operates identically to FST except that the stack is popped following the transfer. This is done by tagging the top stack element empty and then incrementing ST. FSTP permits storing to a temporary real memory variable, whereas FST does not. Coding FSTP ST(0) is equivalent to popping the stack with no data transfer.

FXCH//destination

FXCH (exchange registers) swaps the contents of the destination and the stack top registers. If the destination is not coded explicitly, ST(1) is used. Many 80287 instructions operate only on the stack top; FXCH provides a simple means of effectively using these instructions on lower stack elements. For example, the following sequence takes the square root of the third register from the top:

```
FXCH ST(3)
FSQRT
FXCH ST(3)
```

FILD source

FILD (integer load) converts the source memory operand from its binary integer format (word, short, or long) to temporary real and loads (pushes) the result onto the stack. The (new) stack top is tagged zero if all bits in the source were zero, and is tagged valid otherwise.

FIST destination

FIST (integer store) rounds the content of the stack top to an integer according to the RC field of the control word and transfers the result to the destination. The destination may define a word or short integer variable. Negative zero is stored in the same encoding as positive zero: 0000...00.

FISTP destination

FISTP (integer and pop) operates like FIST and also pops the stack following the transfer. The destination may be any of the binary integer data types.

FBLD source

FBLD (packed decimal (BCD) load) converts the content of the source operand from packed decimal to temporary real and loads (pushes) the result onto the stack. The sign of the source is preserved, including the case where the value is negative zero. FBLD is an exact operation; the source is loaded with no rounding error.

The packed decimal digits of the source are assumed to be in the range 0–9H. The instruction does not check for invalid digits (A–FH) and the result of attempting to load an invalid encoding is undefined.

FBSTP destination

FBSTP (packed decimal (BCD) store and pop) converts the content of the stack top to a packed decimal integer, stores the result at the destination in memory, and pops the stack. FBSTP produces a rounded integer from a nonintegral value by adding 0.5 to the value and then chopping. Users who are concerned about rounding may precede FBSTP with FRNDINT.

Arithmetic Instructions

The 80287's arithmetic instruction set (table 2-2) provides a wealth of variations on the basic add, subtract, multiply, and divide operations, and a number of other useful functions. These range from a simple absolute value to a square root instruction that executes faster than ordinary division; 80287 programmers no longer need to spend valuable time eliminating square roots from algorithms because they run too slowly. Other arithmetic instructions perform exact modulo division, round real numbers to integers, and scale values by powers of two.

The 80287's basic arithmetic instructions (addition, subtraction, multiplication, and division) are designed to encourage the development of very efficient algorithms. In particular, they allow the programmer to minimize memory references and to make optimum use of the NPX register stack.

Table 2-3 summarizes the available operation/operand forms that are provided for basic arithmetic. In addition to the four normal operations, two "reversed" instructions make subtraction and division "symmetrical" like addition and multiplication. The variety of instruction and operand forms give the programmer unusual flexibility:

- Operands may be located in registers or memory.
- Results may be deposited in a choice of registers.
- Operands may be a variety of NPX data types: temporary real, long real, short real, short integer or word integer, with automatic conversion to temporary real performed by the 80287.

Table 2-2. Arithmetic Instructions

| Addition | |
|------------------|----------------------------------|
| FADD | Add real |
| FADDP | Add real and pop |
| FIADD | Integer add |
| Subtraction | |
| FSUB | Subtract real |
| FSUBP | Subtract real and pop |
| FISUB | Integer subtract |
| FSUBR | Subtract real reversed |
| FSUBRP | Subtract real reversed and pop |
| FISUBR | Integer subtract reversed |
| Multiplication | |
| FMUL | Multiply real |
| FMULP | Multiply real and pop |
| FIMUL | Integer multiply |
| Division | |
| FDIV | Divide real |
| FDIVP | Divide real and pop |
| FIDIV | Integer divide |
| FDIVR | Divide real reversed |
| FDIVRP | Divide real reversed and pop |
| FIDIVR | Integer divide reversed |
| Other Operations | |
| FSQRT | Square root |
| FSCALE | Scale |
| FPREM | Partial remainder |
| FRNDINT | Round to integer |
| FEXTRACT | Extract exponent and significand |
| FABS | Absolute value |
| FCHS | Change sign |

Five basic instruction forms may be used across all six operations, as shown in table 2-3. The classical stack form may be used to make the 80287 operate like a classical stack machine. No operands are coded in this form, only the instruction mnemonic. The NPX picks the source operand from the stack top and the destination from the next stack element. It then pops the stack, performs the operation, and returns the result to the new stack top, effectively replacing the operands by the result.

The register form is a generalization of the classical stack form; the programmer specifies the stack top as one operand and any register on the stack as the other operand. Coding the stack top as the destination provides a convenient way to access a constant, held elsewhere in the stack, from the stack top. The converse coding (ST is the source operand) allows, for example, adding the top into a register used as an accumulator.

Often the operand in the stack top is needed for one operation but then is of no further use in the computation. The register pop form can be used to pick up the stack top as the source operand, and then discard it by popping the stack. Coding operands of ST(1),ST with a register pop mnemonic is equivalent to a classical stack operation: the top is popped and the result is left at the new top.

Table 2-3. Basic Arithmetic Instructions and Operands

| Instruction Form | Mnemonic Form | Operand Forms destination, source | ASM286 Example |
|------------------|---------------|--------------------------------------|----------------|
| Classical stack | <i>Fop</i> | { ST(1),ST } | FADD |
| Register | <i>Fop</i> | ST(i),ST or ST,ST(i) | FSUB ST,ST(3) |
| Register pop | <i>FopP</i> | ST(i),ST | FMULP ST(2),ST |
| Real memory | <i>Fop</i> | { ST, } short-real/long-real | FDIV AZIMUTH |
| Integer memory | <i>Flop</i> | { ST, } word-integer/short-integer | FIDIV N_PULSES |

NOTES:

Braces ({ }) surround *implicit* operands; these are not coded, and are shown here for information only.

op = ADD destination \leftarrow destination + source
 SUB destination \leftarrow destination - source
 SUBR destination \leftarrow source - destination
 MUL destination \leftarrow destination • source
 DIV destination \leftarrow destination \div source
 DIVR destination \leftarrow source \div destination

The two memory forms increase the flexibility of the 80287's arithmetic instructions. They permit a real number or a binary integer in memory to be used directly as a source operand. This is a very useful facility in situations where operands are not used frequently enough to justify holding them in registers. Note that any memory addressing mode may be used to define these operands, so they may be elements in arrays, structures, or other data organizations, as well as simple scalars.

The six basic operations are discussed further in the next paragraphs, and descriptions of the remaining seven arithmetic operations follow.

ADDITION

FADD // *source/destination,source*
FADDP *destination/source*
FIADD *source*

The addition instructions (add real, add real and pop, integer add) add the source and destination operands and return the sum to the destination. The operand at the stack top may be doubled by coding:

FADD ST, ST(0)

NORMAL SUBTRACTION

FSUB // *source/destination,source*
FSUBP *destination/source*
FISUB *source*

The normal subtraction instructions (subtract real, subtract real and pop, integer subtract) subtract the source operand from the destination and return the difference to the destination.

REVERSED SUBTRACTION

FSUBR // *source/destination,source*
FSUBRP *destination/source*
FISUBR *source*

The reversed subtraction instructions (subtract real reversed, subtract real reversed and pop, integer subtract reversed) subtract the destination from the source and return the difference to the destination.

MULTIPLICATION

FMUL //*source/destination,source*
FMULP *destination,source*
FIMUL *source*

The multiplication instructions (multiply real, multiply real and pop, integer multiply) multiply the source and destination operands and return the product to the destination. Coding FMUL ST,ST(0) squares the content of the stack top.

NORMAL DIVISION

FDIV //*source/destination,source*
FDIVP *destination,source*
FIDIV *source*

The normal division instructions (divide real, divide real and pop, integer divide) divide the destination by the source and return the quotient to the destination.

REVERSED DIVISION

FDIVR //*source/destination,source*
FDIVRP *destination,source*
FIDIVR *source*

The reversed division instructions (divide real reversed, divide real reversed and pop, integer divide reversed) divide the source operand by the destination and return the quotient to the destination.

FSQRT

FSQRT (square root) replaces the content of the top stack element with its square root. (Note: The square root of -0 is defined to be -0 .)

FSCALE

FSCALE (scale) interprets the value contained in ST(1) as an integer and adds this value to the exponent of the number in ST. This is equivalent to

$$ST \leftarrow ST \cdot 2^{ST(1)}$$

Thus, FSCALE provides rapid multiplication or division by integral powers of 2. It is particularly useful for scaling the elements of a vector.

Note that FSCALE assumes the scale factor in ST(1) is an integral value in the range $-2^{15} \leq X < 2^{15}$. If the value is not integral, but is in-range and is greater in magnitude than 1, FSCALE uses the nearest integer smaller in magnitude; i.e., it chops the value toward 0. If the value is out of range, or $0 < |X| < 1$, the instruction will produce an undefined result and will not signal an exception. The recommended practice is to load the scale factor from a word integer to ensure correct operation.

FPREM

FPREM (partial remainder) performs modulo division of the top stack element by the next stack element, i.e., ST(1) is the modulus. FPREM produces an *exact* result; the precision exception does not occur. The sign of the remainder is the same as the sign of the original dividend.

FPREM operates by performing successive scaled subtractions; obtaining the exact remainder when the operands differ greatly in magnitude can consume large amounts of execution time. Because the 80287 can only be preempted between instructions, the remainder function could seriously increase interrupt latency in these cases. Accordingly, the instruction is designed to be executed iteratively in a software-controlled loop.

FPREM can reduce a magnitude difference of up to 2^{64} in one execution. If FPREM produces a remainder that is less than the modulus, the function is complete and bit C2 of the status word condition code is cleared. If the function is incomplete, C2 is set to 1; the result in ST is then called the partial remainder. Software can inspect C2 by storing the status word following execution of FPREM and re-execute the instruction (using the partial remainder in ST as the dividend), until C2 is cleared. Alternatively, a program can determine when the function is complete by comparing ST to ST(1). If $ST > ST(1)$, then FPREM must be executed again; if $ST = ST(1)$, then the remainder is 0; if $ST < ST(1)$, then the remainder is ST. A higher priority interrupting routine that needs the 80287 can force a context switch between the instructions in the remainder loop.

An important use for FPREM is to reduce arguments (operands) of periodic transcendental functions to the range permitted by these instructions. For example, the FPTAN (tangent) instruction requires its argument to be less than $\pi/4$. Using $\pi/4$ as a modulus, FPREM will reduce an argument so that it is in range of FPTAN. Because FPREM produces an exact result, the argument reduction does *not* introduce roundoff error into the calculation, even if several iterations are required to bring the argument into range. (The rounding of π does not create the effect of a rounded argument, but of a rounded period.)

FPREM also provides the least-significant three bits of the quotient generated by FPREM (in C₃, C₁, C₀). This is also important for transcendental argument reduction, because it locates the original angle in the correct one of eight $\pi/4$ segments of the unit circle (see table 2-4). If the quotient is less than 4, then C₀ will be the value of C₃ before FPREM was executed. If the quotient is less than 2, then C₃ will be the value of C₁ before FPREM was executed.

Table 2-4. Condition Code Interpretation after FPREM

| Condition Code | | | | Interpretation after FPREM |
|----------------|----|----|----|---|
| C3 | C2 | C1 | C0 | |
| X | 1 | X | X | Incomplete Reduction; further iteration is required for complete reduction. |
| 0 | 0 | 0 | 0 | Complete Reduction; C1, C3, and C0 contain the three least-significant bits of quotient: (Quotient) MOD 8 = 0 |
| 0 | 0 | 0 | 1 | (Quotient) MOD 8 = 4 |
| 0 | 0 | 1 | 0 | (Quotient) MOD 8 = 1 |
| 0 | 0 | 1 | 1 | (Quotient) MOD 8 = 5 |
| 1 | 0 | 0 | 0 | (Quotient) MOD 8 = 2 |
| 1 | 0 | 0 | 1 | (Quotient) MOD 8 = 6 |
| 1 | 0 | 1 | 0 | (Quotient) MOD 8 = 3 |
| 1 | 0 | 1 | 1 | (Quotient) MOD 8 = 7 |

FRNDINT

FRNDINT (round to integer) rounds the top stack element to an integer. For example, assume that ST contains the 80287 real number encoding of the decimal value 155.625. FRNDINT will change the value to 155 if the RC field of the control word is set to down or chop, or to 156 if it is set to up or nearest.

FXTRACT

FXTRACT (extract exponent and significand) “decomposes” the number in the stack top into two numbers that represent the actual value of the operand’s exponent and significand fields. The “exponent” replaces the original operand on the stack and the “significand” is pushed onto the stack. Following execution of FXTRACT, ST (the new stack top) contains the value of the original significand expressed as a real number: its sign is the same as the operand’s, its exponent is 0 true (16,383 or 3FFFH biased), and its significand is identical to the original operand’s. ST(1) contains the value of the original operand’s true (unbiased) exponent expressed as a real number. If the original operand is zero, FXTRACT produces zeros in ST and ST(1) and *both* are signed as the original operand.

To clarify the operation of FXTRACT, assume ST contains a number of whose true exponent is +4 (i.e., its exponent field contains 4003H). After executing FXTRACT, ST(1) will contain the real number +4.0; its sign will be positive, its exponent field will contain 4001H (+2 true) and its significand field will contain 1 Δ 00...00B. In other words, the value in ST(1) will be $1.0 \times 2^2 = 4$. If ST contains an operand whose true exponent is -7 (i.e., its exponent field contains 3FF8H), then FXTRACT will return an “exponent” of -7.0; after the instruction executes, ST(1)’s sign and exponent fields will contain C001H (negative sign, true exponent of 2), and its significand will be 1 Δ 1100...00B. In other words, the value in ST(1) will be $-1.11 \times 2^2 = -7.0$. In both cases, following FXTRACT, ST’s sign and significand fields will be the same as the original operand’s, and its exponent field will contain 3FFFH (0 true).

FXTRACT is useful in conjunction with FBSTP for converting numbers in 80287 temporary real format to decimal representations (e.g., for printing or displaying). It can also be useful for debugging, because it allows the exponent and significant parts of a real number to be examined separately.

FABS

FABS (absolute value) changes the top stack element to its absolute value by making its sign positive.

FCHS

FCHS (change sign) complements (reverses) the sign of the top stack element.

Comparison Instructions

Each of these instructions (table 2-5) analyzes the top stack element, often in relationship to another operand, and reports the result in the status word condition code. The basic operations are compare, test (compare with zero), and examine (report tag, sign, and normalization). Special forms of the compare operation are provided to optimize algorithms by allowing direct comparisons with binary integers and real numbers in memory, as well as popping the stack after a comparison.

The FSTSW (store status word) instruction may be used following a comparison to transfer the condition code to memory for inspection.

Note that instructions other than those in the comparison group may update the condition code. To ensure that the status word is not altered inadvertently, store it immediately following a comparison operation.

FCOM //source

FCOM (compare real) compares the stack top to the source operand. The source operand may be a register on the stack, or a short or long real memory operand. If an operand is not coded, ST is compared to ST(1). Positive and negative forms of zero compare identically as if they were unsigned. Following the instruction, the condition codes reflect the order of the operands as shown in table 2-6.

NaNs and ∞ (projective) cannot be compared and return $C3=C0=1$ as shown in the table.

FCOMP //source

FCOMP (compare real and pop) operates like FCOM, and in addition pops the stack.

FCOMPP

FCOMPP (compare real and pop twice) operates like FCOM and additionally pops the stack twice, discarding both operands. The comparison is of the stack top to ST(1); no operands may be explicitly coded.

FICOM source

FICOM (integer compare) converts the source operand, which may reference a word or short binary integer variable, to temporary real and compares the stack top to it.

FICOMP source

FICOMP (integer compare and pop) operates identically to FICOM and additionally discards the value in ST by popping the stack.

Table 2-5. Comparison Instructions

| | |
|--------|----------------------------|
| FCOM | Compare real |
| FCOMP | Compare real and pop |
| FCOMPP | Compare real and pop twice |
| FICOM | Integer compare |
| FICOMP | Integer compare and pop |
| FTST | Test |
| FXAM | Examine |

Table 2-6. Condition Code Interpretation after FCOM

| Condition Code | | | | Interpretation after FCOM |
|----------------|----|----|----|---------------------------|
| C3 | C2 | C1 | C0 | |
| 0 | 0 | X | 0 | ST > source |
| 0 | 0 | X | 1 | ST < source |
| 1 | 0 | X | 0 | ST = source |
| 1 | 1 | X | 1 | ST is not comparable |

FTST

FTST (test) tests the top stack element by comparing it to zero. The result is posted to the condition codes as shown in table 2-7.

FXAM

FXAM (examine) reports the content of the top stack element as positive/negative and NaN/unnormal/denormal/normal/zero, or empty. Table 2-8 lists and interprets all the condition code values that FXAM generates. Although four different encodings may be returned for an empty register, bits C3 and C0 of the condition code are both 1 in all encodings. Bits C2 and C1 should be ignored when examining for empty.

Transcendental Instructions

The instructions in this group (table 2-9) perform the time-consuming *core calculations* for all common trigonometric, inverse trigonometric, hyperbolic, inverse hyperbolic, logarithmic, and exponential functions. Prologue and epilogue software may be used to reduce arguments to the range accepted by the instructions and to adjust the result to correspond to the original arguments if necessary. The transcendentals operate on the top one or two stack elements, and they return their results to the stack, also.

Table 2-7. Condition Code Interpretation after FTST

| Condition Code | | | | Interpretation after FTST |
|----------------|----|----|----|--|
| C3 | C2 | C1 | C0 | |
| 0 | 0 | X | 0 | ST > 0 |
| 0 | 0 | X | 1 | ST < 0 |
| 1 | 0 | X | 0 | ST = 0 |
| 1 | 1 | X | 1 | ST is not comparable; (i.e., it is a NaN or projective infinity) |

Table 2-8. FXAM Condition Code Settings

| Condition Code | | | | Interpretation |
|----------------|----|----|----|----------------|
| C3 | C2 | C1 | C0 | |
| 0 | 0 | 0 | 0 | + Unnormal |
| 0 | 0 | 0 | 1 | + NaN |
| 0 | 0 | 1 | 0 | - Unnormal |
| 0 | 0 | 1 | 1 | - NaN |
| 0 | 1 | 0 | 0 | + Normal |
| 0 | 1 | 0 | 1 | + ∞ |
| 0 | 1 | 1 | 0 | - Normal |
| 0 | 1 | 1 | 1 | - ∞ |
| 1 | 0 | 0 | 0 | + 0 |
| 1 | 0 | 0 | 1 | Empty |
| 1 | 0 | 1 | 0 | - 0 |
| 1 | 0 | 1 | 1 | Empty |
| 1 | 1 | 0 | 0 | + Denormal |
| 1 | 1 | 0 | 1 | Empty |
| 1 | 1 | 1 | 0 | - Denormal |
| 1 | 1 | 1 | 1 | Empty |

Table 2-9. Transcendental Instructions

| | |
|--|---|
| FPTAN FPATAN F2XM1 FYL2X FYL2XP1 | Partial tangent Partial arctangent $2^x - 1$ $Y \cdot \log_2 X$ $Y \cdot \log_2(X + 1)$ |
|--|---|

NOTE

The transcendental instructions assume that their operands are *valid* and *in-range*. The instruction descriptions in this section provide the allowed operand range of each instruction.

All operands to a transcendental must be normalized; denormals, unnormals, infinities, and NaNs are considered invalid. (Zero operands are accepted by some functions and are considered out-of-range by others). If a transcendental operand is invalid or out-of-range, the instruction will produce an undefined result without signalling an exception. It is the programmer's responsibility to ensure that operands are valid and in-range before executing a transcendental. For periodic functions, FPREM may be used to bring a valid operand into range.

FPTAN

$$0 \leq \text{ST}(0) \leq \pi/4$$

FPTAN (partial tangent) computes the function $Y/X = \text{TAN}(\Theta)$. Θ is taken from the top stack element; it must lie in the range $0 \leq \Theta \leq \pi/4$. The result of the operation is a ratio; Y replaces Θ in the stack and X is pushed, becoming the new stack top.

The ratio result of FPTAN and the ratio argument of FPATAN are designed to optimize the calculation of the other trigonometric functions, including SIN, COS, ARCSIN, and ARCCOS. These can be derived from TAN and ARCTAN via standard trigonometric identities.

FPATAN

$$0 \leq \text{ST}(1) < \text{ST}(0) < \infty$$

FPATAN (partial arctangent) computes the function $\Theta = \text{ARCTAN}(Y/X)$. X is taken from the top stack element and Y from ST(1). Y and X must observe the inequality $0 \leq Y < X < \infty$. The instruction pops the stack and returns Θ to the (new) stack top, overwriting the Y operand.

F2XM1

$$0 \leq \text{ST}(0) \leq 0.5$$

F2XM1 (2 to the X minus 1) calculates the function $Y = 2^X - 1$. X is taken from the stack top and must be in the range $0 \leq X \leq 0.5$. The result Y replaces X at the stack top.

This instruction is designed to produce a very accurate result even when X is close to 0. To obtain $Y=2^X$, add 1 to the result delivered by F2XM1.

The following formulas show how values other than 2 may be raised to a power of X:

$$10^x = 2^{x \cdot \text{LOG}_2 10}$$

$$e^x = 2^{x \cdot \text{LOG}_2 e}$$

$$y^x = 2^{x \cdot \text{LOG}_2 y}$$

As shown in the next section, the 80287 has built-in instructions for loading the constants $\text{LOG}_2 10$ and $\text{LOG}_2 e$, and the FYL2X instruction may be used to calculate $X \cdot \text{LOG}_2 Y$.

FYL2X

$$0 < \text{ST}(0) < \infty - \infty < \text{ST}(1) < \infty$$

FYL2X (Y log base 2 of X) calculates the function $Z = Y \cdot \text{LOG}_2 X$. X is taken from the stack top and Y from ST(1). The operands must be in the ranges $0 < X < \infty$ and $-\infty < Y < +\infty$. The instruction pops the stack and returns Z at the (new) stack top, replacing the Y operand.

This function optimizes the calculations of log to any base other than two, because a multiplication is always required:

$$\text{LOG}_n 2 \cdot \text{LOG}_2 X$$

FYL2XP1

$$0 \leq |\text{ST}(0)| < (1 - (\sqrt{2}/2))$$

$$-\infty < \text{ST}(1) < \infty$$

FYL2XP1 (Y log base 2 of (X + 1)) calculates the function $Z = Y \cdot \text{LOG}_2 (X + 1)$. X is taken from the stack top and must be in the range $0 \leq |X| < (1 - (\sqrt{2}/2))$. Y is taken from ST(1) and must be in the range $-\infty < Y < \infty$. FYL2XP1 pops the stack and returns Z at the (new) stack top, replacing Y.

The instruction provides improved accuracy over FYL2X when computing the log of a number very close to 1, for example $1 + \epsilon$ where $\epsilon \ll 1$. Providing ϵ rather than $1 + \epsilon$ as the input to the function allows more significant digits to be retained.

Constant Instructions

Each of these instructions (table 2-10) loads (pushes) a commonly-used constant onto the stack. The values have full temporary real precision (64 bits) and are accurate to approximately 19 decimal digits. Because a temporary real constant occupies 10 memory bytes, the constant instructions, which are only two bytes long, save storage and improve execution speed, in addition to simplifying programming.

FLDZ

FLDZ (load zero) loads (pushes) +0.0 onto the stack.

FLD1

FLD1 (load one) loads (pushes) +1.0 onto the stack.

Table 2-10. Constant Instructions

| | |
|--------|--------------------------|
| FLDZ | Load + 0.0 |
| FLD1 | Load + 1.0 |
| FLDPI | Load π |
| FLDL2T | Load $\text{log}_2 10$ |
| FLDL2E | Load $\text{log}_2 e$ |
| FLDLG2 | Load $\text{log}_{10} 2$ |
| FLDLN2 | Load $\text{log}_e 2$ |

FLDPI

FLDPI (load π) loads (pushes) π onto the stack.

FLDL2T

FLDL2T (load log base 2 of 10) loads (pushes) the value $\text{LOG}_2 10$ onto the stack.

FLDL2E

FLDL2E (load log base 2 of e) loads (pushes) the value $\text{LOG}_2 e$ onto the stack.

FLDLG2

FLDLG2 (load log base 10 of 2) loads (pushes) the value $\text{LOG}_{10} 2$ onto the stack.

FLDLN2

FLDLN2 (load log base e of 2) loads (pushes) the value $\text{LOG}_e 2$ onto the stack.

Processor Control Instructions

The processor control instructions shown in table 2-11 are not typically used in calculations; they provide control over the 80287 NPX for system-level activities. These activities include initialization, exception handling, and task switching.

As shown in table 2-11, many of the NPX processor control instructions have two forms of assembler mnemonic:

- A *wait* form, where the mnemonic is prefixed only with an F, such as FSTSW. This form checks for unmasked numeric errors.
- A *no-wait* form, where the mnemonic is prefixed with an FN, such as FNSTSW. This form ignores unmasked numeric errors.

Table 2-11. Processor Control Instructions

| | |
|--------------------|-------------------------|
| FINIT/FNINIT | Initialize processor |
| FSETPM | Set Protected Mode |
| FLDCW | Load control word |
| FSTCW/FNSTCW | Store control word |
| FSTSW/FNSTSW | Store status word |
| FSTSW AX/FNSTSW AX | Store status word to AX |
| FCLEX/FNCLEX | Clear exceptions |
| FSTENV/FNSTENV | Store Environment |
| FLDENV | Load environment |
| FSAVE/FNSAVE | Save state |
| FRSTOR | Restore state |
| FINCSTP | Increment stack pointer |
| FDECSTP | Decrement stack pointer |
| FFREE | Free register |
| FNOP | No operation |
| FWAIT | CPU Wait |

When the control instruction is coded using the *no-wait* form of the mnemonic, the ASM286 assembler does not precede the ESC instruction with a *wait* instruction, and the CPU does not test the ERROR status line from the NPX before executing the processor control instruction.

Only the *processor control* class of instructions have this alternate no-wait form. All numeric instructions are automatically synchronized by the 80286, with the CPU testing the BUSY status line and only executing the numeric instruction when this line is inactive. Because of this automatic synchronization by the 80286, *numeric* instructions for the 80287 need not be preceded by a CPU wait instruction in order to execute correctly.

It should also be noted that the 8087 instructions FENI and FDISI perform no function in the 80287. If these opcodes are detected in an 80286/80287 instruction stream, the 80287 will perform no specific operation and no internal states will be affected. For programmers interested in porting numeric software from iAPX 86 or iAPX 88 environments to the iAPX 286, however, it should be noted that program sections containing these exception-handling instructions are not likely to be completely portable to the iAPX 286/20. Appendix B contains a more complete description of the differences between the 80287 and the 8087 NPX.

FINIT/FNINIT

FINIT/FNINIT (initialize processor) sets the 80287 NPX into a known state, unaffected by any previous activity. The no-wait form of this instruction will cause the 80287 to abort any previous numeric operations currently executing in the NEU. This instruction performs the functional equivalent of a hardware RESET, with one exception; FINIT/FNINIT does not affect the current 80287 operating mode (either Real-Address mode or Protected mode). FINIT checks for unmasked numeric exceptions, FNINIT does not.

Note that if FNINIT is executed while a previous 80287 memory-referencing instruction is running, 80287 bus cycles in progress will be aborted. This instruction may be necessary to clear the 80287 if a Processor Extension Segment Overrun Exception (Interrupt 9) is detected by the CPU.

FSETPM

FSETPM (set Protected mode) sets the operating mode of the 80287 to Protected Virtual-Address mode. When the 80287 is first initialized following hardware RESET, it operates in Real-Address mode, just as does the 80286 CPU. Once the 80287 NPX has been set into Protected mode, only a hardware RESET can return the NPX to operation in Real-Address mode.

When the 80287 operates in Protected mode, the NPX exception pointers are represented differently than they are in Real-Address mode (see the FSAVE and FSTENV instructions that follow). This distinction is evident primarily to writers of numeric exception handlers, however. For general application programmers, the operating mode of the 80287 need not be a concern.

FLDCW source

FLDCW (load control word) replaces the current processor control word with the word defined by the source operand. This instruction is typically used to establish or change the 80287's mode of operation. Note that if an exception bit in the status word is set, loading a new control word that unmask that exception and clears the interrupt enable mask will generate an immediate interrupt request before the next instruction is executed. When changing modes, the recommended procedure is to first clear any exceptions and then load the new control word.

FSTCW/FNSTCW destination

FSTCW/FNSTCW (store control word) writes the current processor control word to the memory location defined by the destination. FSTCW checks for unmasked numeric exceptions, FNSTCW does not.

FSTSW/FNSTSW destination

FSTSW/FNSTSW (store status word) writes the current value of the 80287 status word to the destination operand in memory. The instruction is used to

- Implement conditional branching following a comparison or FPREM instruction (FSTSW)
- Poll the 80287 to determine if it is busy (FNSTSW)
- Invoke exception handlers in environments that do not use interrupts (FSTSW).

FSTSW checks for unmasked numeric exceptions, FNSTSW does not.

FSTSW AX/FNSTSW AX

FSTSW AX/FNSTSW AX (store status word to AX) is a special 80287 instruction that writes the current value of the 80287 status word directly into the 80286 AX register. This instruction optimizes conditional branching in numeric programs, where the 80286 CPU must test the condition of various NPX status bits. The waited form checks for unmasked numeric exceptions, the non-awaited for does not.

When this instruction is executed, the 80286 AX register is updated with the NPX status word before the CPU executes any further instructions. In this way, the 80286 can immediately test the NPX status word without any WAIT or other synchronization instructions required.

FCLEX/FNCLEX

FCLEX/FNCLEX (clear exceptions) clears all exception flags, the error status flag and the busy flag in the status word. As a consequence, the 80287's ERROR line goes inactive. FCLEX checks for unmasked numeric exceptions, FNCLEX does not.

FSAVE/FNSAVE destination

FSAVE/FNSAVE (save state) writes the full 80287 state—environment plus register stack—to the memory location defined by the destination operand. Figure 2-1 shows the layout of the 94-byte save area; typically the instruction will be coded to save this image on the CPU stack. FNSAVE delays its execution until all NPX activity completes normally. Thus, the save image reflects the state of the NPX following the completion of any running instruction. After writing the state image to memory, FSAVE/FNSAVE initializes the 80287 as if FINIT/FNINIT had been executed.

FSAVE/FNSAVE is useful whenever a program wants to save the current state of the NPX and initialize it for a new routine. Three examples are

- An operating system needs to perform a context switch (suspend the task that had been running and give control to a new task).
- An exception handler needs to use the 80287.
- An application task wants to pass a “clean” 80287 to a subroutine.

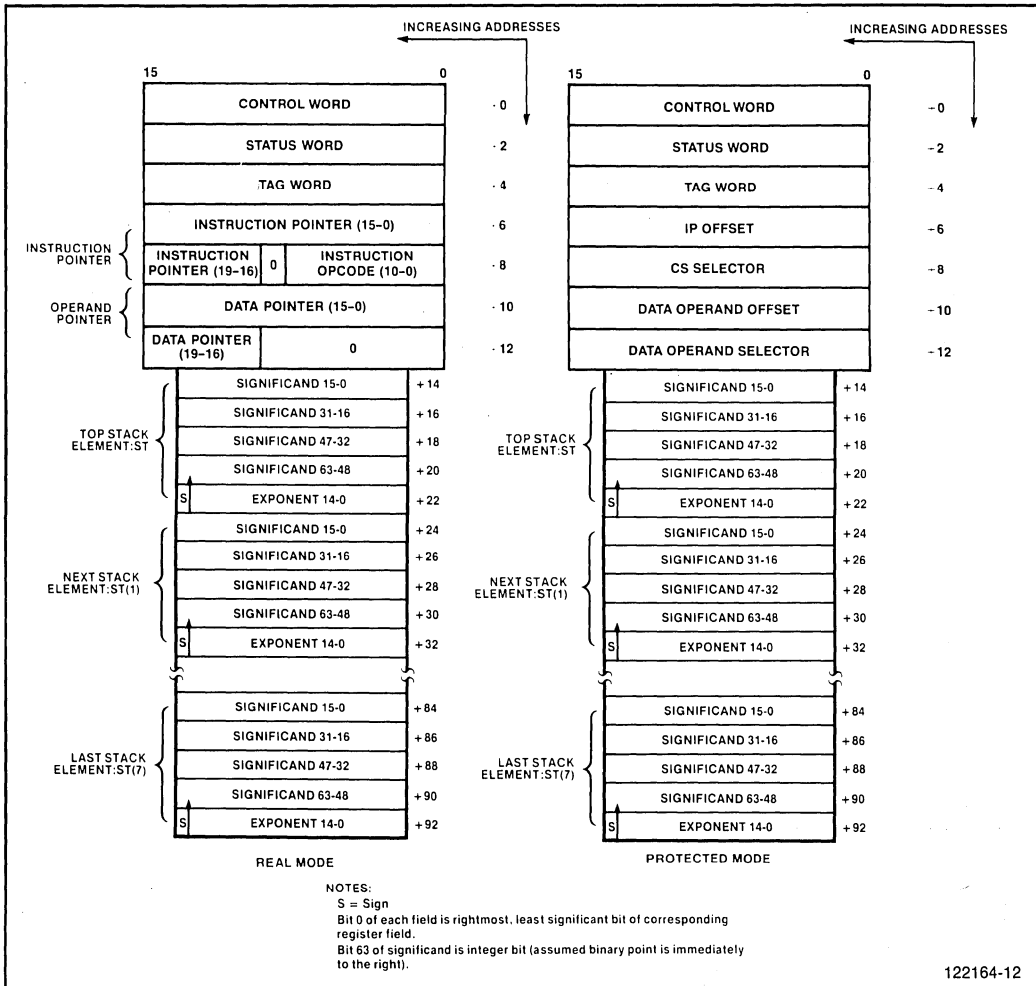


Figure 2-1. FSAVE/FRSTOR Memory Layout

FSAVE checks for unmasked numeric errors before executing, FNSAVE does not. An FWAIT should be executed before CPU interrupts are enabled or any subsequent 80287 instruction is executed. Other CPU instructions may be executed between the FNSAVE/FSAVE and the FWAIT.

FRSTOR source

FRSTOR (restore state) reloads the 80287 from the 94-byte memory area defined by the source operand. This information should have been written by a previous FSAVE/FNSAVE instruction and not altered by any other instruction. An FWAIT is not required after FRSTOR. FRSTOR will automatically wait and check for interrupts until all data transfers are completed before continuing to the next instruction.

Note that the 80287 “reacts” to its new state at the conclusion of the FRSTOR; it will, for example, generate an exception request if the exception and mask bits in the memory image so indicate when the next WAIT or error-checking-ESC instruction is executed.

FSTENV/FNSTENV destination

FSTENV/FNSTENV (store environment) writes the 80287's basic status—control, status, and tag words, and exception pointers—to the memory location defined by the destination operand. Typically, the environment is saved on the CPU stack. FSTENV/FNSTENV is often used by exception handlers because it provides access to the exception pointers that identify the offending instruction and operand. After saving the environment, FSTENV/FNSTENV sets all exception masks in the processor. FSTENV checks for pending errors before executing, FNSTENV does not.

Figure 2-2 shows the format of the environment data in memory. FNSTENV does not store the environment until all NPX activity has completed. Thus, the data saved by the instruction reflects the 80287 after any previously decoded instruction has been executed. After writing the environment image to memory, FNSTENV/FSTENV initializes the 80287 state as if FNINIT/FINIT had been executed.

FSTENV/FNSTENV must be allowed to complete before any other 80287 instruction is decoded. When FSTENV is coded, an explicit FWAIT, or assembler-generated WAIT, should precede any subsequent 80287 instruction.

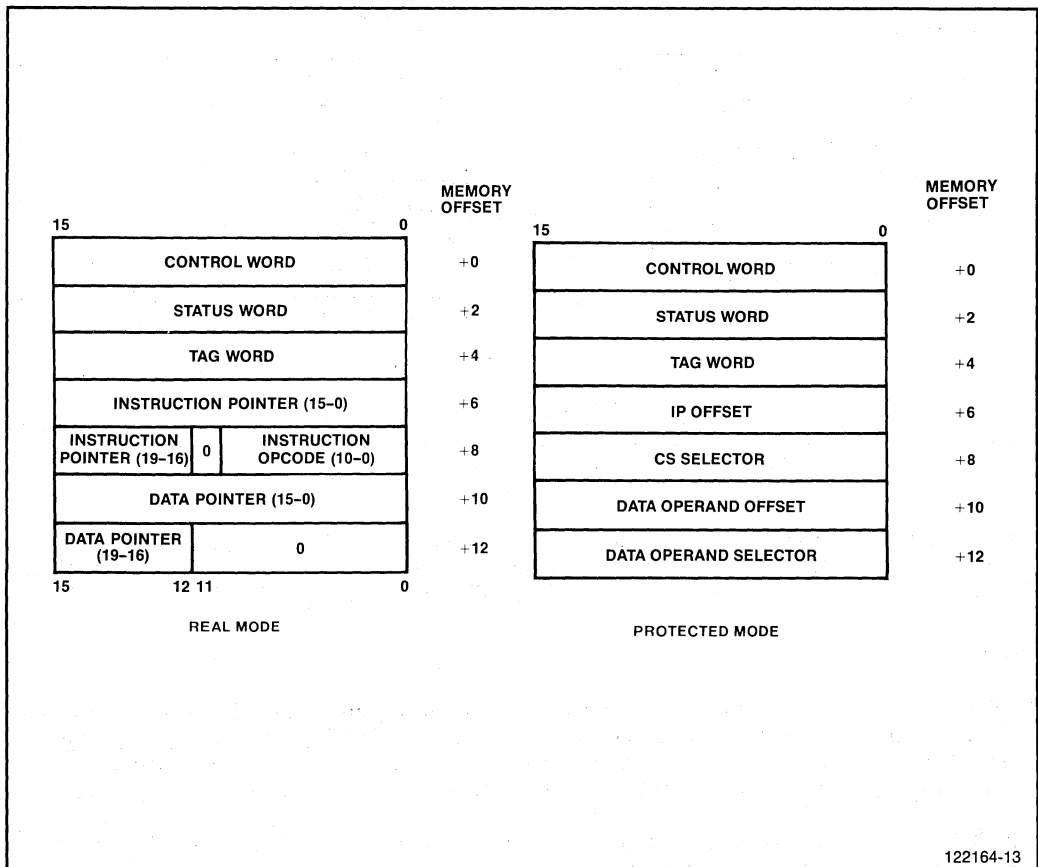


Figure 2-2. FSTENV/FLDENV Memory Layout

FLDENV source

FLDENV (load environment) reloads the environment from the memory area defined by the source operand. This data should have been written by a previous FSTENV/FNSTENV instruction. CPU instructions (that do not reference the environment image) may immediately follow FLDENV. An FWAIT is not required after FLDENV. FLDENV will automatically wait for all data transfers to complete before executing the next instruction.

Note that loading an environment image that contains an unmasked exception will cause a numeric exception when the next WAIT or error-checking-ESC instruction is executed.

FINCSTP

FINCSTP (increment stack pointer) adds 1 to the stack top pointer (ST) in the status word. It does not alter tags or register contents, nor does it transfer data. It is not equivalent to popping the stack, because it does not set the tag of the previous stack top to empty. Incrementing the stack pointer when ST=7 produces ST=0.

FDECSTP

FDECSTP (decrement stack pointer) subtracts 1 from ST, the stack top pointer in the status word. No tags or registers are altered, nor is any data transferred. Executing FDECSTP when ST=0 produces ST=7.

FFREE destination

FFREE (free register) changes the destination register's tag to empty; the content of the register is unaffected.

FNOP

FNOP (no operation) stores the stack top to the stack top (FST ST,ST(0)) and thus effectively performs no operation.

FWAIT (CPU INSTRUCTION)

FWAIT is not actually an 80287 instruction, but an alternate mnemonic for the CPU WAIT instruction. The FWAIT or WAIT mnemonic should be coded whenever the programmer wants to synchronize the CPU to the NPX, that is, to suspend further instruction decoding until the NPX has completed the current instruction. FWAIT will check for unmasked numeric exceptions.

NOTE

A CPU instruction should not attempt to access a memory operand until the 80287 instruction has completed. For example, the following coding shows how FWAIT can be used to force the CPU instruction to wait for the 80287:

```
FIST      VALUE
FWAIT    ; Wait for FIST to complete
MOV      AX, VALUE
```

More information on when to code an FWAIT instruction is given in a following section of this chapter, "Concurrent Processing with the 80287."

Instruction Set Reference Information

Table 2-14 later in this chapter lists the operating characteristics of all the 80287 instructions. There is one table entry for each instruction mnemonic; the entries are in alphabetical order for quick lookup. Each entry provides the general operand forms accepted by the instruction as well as a list of all exceptions that may be detected during the operation.

One entry exists for each combination of operand types that can be coded with the mnemonic. Table 2-12 explains the operand identifiers allowed in table 2-14. Following this entry are columns that provide execution time in clocks, the number of bus transfers run during the operation, the length of the instruction in bytes, and an ASM286 coding sample.

INSTRUCTION EXECUTION TIME

The execution of an 80287 instruction involves three principal activities, each of which may contribute to the overall execution time of the instruction:

- 80286 CPU overhead involved in handling the ESC instruction opcode and setting up the 80287 NPX
- Instruction execution by the 80287 NPX
- Operand transfers between the 80287 NPX and memory or a CPU register

The timing of these various activities is affected by the individual clock frequencies of the 80286 CPU and the 80287 NPX. In addition, slow memories requiring the insertion of wait states in bus cycles, and bus contention due to other processors in the system, may lengthen operand transfer times.

In calculating an overall execution time for an individual numeric instruction, analysts must take each of these activities into account. In most cases, it can be assumed that the numeric instructions have already been prefetched by the 80286 and are awaiting execution.

- The CPU overhead in handling the ESC instruction opcode takes only a single CPU bus cycle before the 80287 begins its execution of the numeric instruction. The timing of this bus cycle is determined by the CPU clock. Additional CPU activity is required to set up the 80287's instruction and data pointer registers, but this activity occurs *after* the 80287 has begun executing its instruction, and so this parallel activity does not affect total execution time.

Table 2-12. Key to Operand Types

| Identifier | Explanation |
|----------------|--|
| ST | Stack top; the register currently at the top of the stack. |
| ST(i) | A register in the stack i ($0 \leq i \leq 7$) stack elements from the top. ST(1) is the next-on-stack register, ST(2) is below ST(1), etc. |
| Short-real | A short real (32 bits) number in memory. |
| Long-real | A long real (64 bits) number in memory. |
| Temp-real | A temporary real (80 bits) number in memory. |
| Packed-decimal | A packed decimal integer (18 digits, 10 bytes) in memory. |
| Word-integer | A word binary integer (16 bits) in memory. |
| Short-integer | A short binary integer (32 bits) in memory. |
| Long-integer | A long binary integer (64 bits) in memory. |
| nn-bytes | A memory area <i>nn</i> bytes long. |

- The duration of individual numeric instructions executing on the 80287 varies for each instruction. Table 2-14 quotes a typical execution clock count and a range for each 80287 instruction. Dividing the figures in the table by 5 (for a 5-MHz 80287 NPX clock) produces an execution time in microseconds. The typical case is an estimate for operand values that normally characterize most applications. The range encompasses best- and worst-case operand values that may be found in extreme circumstances.
- The operand transfer time required to transfer operands between the 80287 and memory or a CPU register depends on the number of words to be transferred, the frequency of the CPU clock controlling bus timing, the number of wait states added to accommodate slower memories, and whether operands are based at even or odd memory addresses. Some (small) additional number of bus cycles may also be lost due to the asynchronous nature of the PEREQ/PEACK handshaking between the 80286 and 80287, and this interaction varies with relative frequencies of the CPU and NPX clocks.

The execution clock counts for the NPX execution of instructions shown in table 2-14 assume that no exceptions are detected during execution. Invalid operation, denormalized operand (unmasked), and zero divide exceptions usually decrease execution time from the typical figure, but execution still falls within the indicated range. The precision exception has no effect on execution time. Unmasked overflow and underflow, and masked denormalized exceptions impose additional execution penalties as shown in table 2-13. Absolute worst-case execution times are therefore the high range figure plus the largest penalty that may be encountered.

BUS TRANSFERS

NPX instructions that reference memory require bus cycles to transfer operands between the NPX and memory. The actual number of transfers depends on the length of the operand and the alignment of the operand in memory. In table 2-14, the first figure gives execution clocks for even-addressed operands, while the second gives the clock count for odd-addressed operands.

For operands aligned at *word boundaries*, that is, based at *even memory addresses*, each word to be transferred requires one bus cycle between the 80286 data channel and memory, and one bus cycle to the NPX. For operands based at *odd memory addresses*, each word transfer requires two bus cycles to transfer individual bytes between the 80286 data channel and memory, and one bus cycle to the NPX.

NOTE

For best performance, operands for the 80287 should be aligned along word boundaries; that is, based at even memory addresses. Operands based at odd memory addresses are transferred to memory essentially byte-at-a-time and may take half again as long to transfer as word-aligned operands.

Additional transfer time is required if slow memories are being used, requiring the insertion of wait states into the CPU bus cycle. In multiprocessor environments, the bus may not be available immediately; this overhead can also increase effective transfer time.

Table 2-13. Execution Penalties

| Exception | Additional Clocks |
|-----------------------|-------------------|
| Overflow (unmasked) | 14 |
| Underflow (unmasked) | 16 |
| Denormalized (masked) | 33 |

INSTRUCTION LENGTH

80287 instructions that do not reference memory are two bytes long. Memory reference instructions vary between two and four bytes. The third and fourth bytes are for the 8- or 16-bit displacement values used in conjunction with the standard 80286 memory-addressing modes.

Note that the lengths quoted in table 2-14 for the processor control instructions (FNINIT, FNSTCW, FNSTSW, FNSTSW AX, FNCLEX, FNSTENV, and FNSAVE) do not include the one-byte CPU wait instruction inserted by the ASM286 assembler if the control instruction is coded using the wait form of the mnemonic (e.g. FINIT, FSTCW, FSTSW, FSTSW AX, FCLEX, FSTENV, and FSAVE). wait and no-wait forms of the processor control instructions have been described in the preceding section titled "Processor Control Instructions."

Table 2-14. Instruction Set Reference Data

| FABS | | | | | |
|--|-------------------------|--|-------------------------------|----------------------------------|---|
| | | FABS (no operands) Absolute value | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 14 | 10-17 | 0 | 2 | FABS |
| FADD | | | | | |
| | | FADD //source/destination,source Add real | | Exceptions: I, D, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST,ST(i)/ST(i),ST short-real long-real | 85 105 110 | 70-100 90-120 95-125 | 0 2 4 | 2 2-4 2-4 | FADD ST,ST(4) FADD AIR_TEMP [SI] FADD [BX].MEAN |
| FADDP | | | | | |
| | | FADDP destination, source Add real and pop | | Exceptions: I, D, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i),ST | 90 | 75-105 | 0 | 2 | FADDP ST(2),ST |
| FBLD | | | | | |
| | | FBLD source Packed decimal (BCD) load | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| packed-decimal | 300 | 290-310 | 5 | 2-4 | FBLD YTD_SALES |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FBSTP | | | | | |
|---------------------|------------------|---|------------------------|------------------|---------------------------|
| | | FBSTP destination Packed decimal (BCD) store and pop | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| packed-decimal | 530 | 520-540 | 5 | 2-4 | FBSTP [BX].FORECAST |
| FCHS | | | | | |
| | | FCHS (no operands) Change sign | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 15 | 10-17 | 0 | 2 | FCHS |
| FCLEX/FNCLEX | | | | | |
| | | FCLEX/FNCLEX(no operands) Clear exceptions | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 5 | 2-8 | 0 | 2 | FNCLEX |
| FCOM | | | | | |
| | | FCOM //source Compare real | | Exceptions: I, D | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST(i) | 45 | 40-50 | 0 | 2 | FCOM ST(1) |
| short-real | 65 | 60-70 | 2 | 2-4 | FCOM [BP].UPPER_LIMIT |
| long-real | 70 | 65-75 | 4 | 2-4 | FCOM WAVELENGTH |
| FCOMP | | | | | |
| | | FCOMP //source Compare real and pop | | Exceptions: I, D | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST(i) | 47 | 42-52 | 0 | 2 | FCOMP ST(2) |
| short-real | 68 | 63-73 | 2 | 2-4 | FCOMP [BP + 2].N_READINGS |
| long-real | 72 | 67-77 | 4 | 2-4 | FCOMP DENSITY |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FCOMPP | | | | | |
|--|-------------------|-------------------------------|------------------------------|-----------------|---|
| FCOMPP (no operands) Compare real and pop twice | | | Exceptions: I, D | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 50 | 45-55 | 0 | 2 | FCOMPP |
| FDECSTP | | | | | |
| FDECSTP (no operands) Decrement stack pointer | | | Exceptions: None | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 9 | 6-12 | 0 | 2 | FDECSTP |
| FDIV | | | | | |
| FDIV //source/destination,source Divide real | | | Exceptions: I, D, Z, O, U, P | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST(i),ST short-real long-real | 198 220 225 | 193-203 215-225 220-230 | 0 2 4 | 2 2-4 2-4 | FDIV FDIV DISTANCE FDIV ARC [DI] |
| FDIVP | | | | | |
| FDIVP destination, source Divide real and pop | | | Exceptions: I, D, Z, O, U, P | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i),ST | 202 | 197-207 | 0 | 2 | FDIVP ST(4),ST |
| FDIVR | | | | | |
| FDIVR //source/destination, source Divide real reversed | | | Exceptions: I, D, Z, O, U, P | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST,ST(i)/ST(i),ST short-real long-real | 199 221 226 | 194-204 216-226 221-231 | 0 2 4 | 2 2-4 2-4 | FDIVR ST(2),ST FDIVR [BX].PULSE_RATE FDIVR RECORDER.FREQUENCY |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FDIVRP | | | | | |
|--|------------------|---------|------------------------------|------------|--------------------------|
| FDIVRP destination, source Divide real reversed and pop | | | Exceptions: I, D, Z, O, U, P | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i),ST | 203 | 198-208 | 0 | 2 | FDIVRP ST(1),ST |
| FFREE | | | | | |
| FFREE destination Free register | | | Exceptions: None | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i) | 11 | 9-16 | 0 | 2 | FFREE ST(1) |
| FIADD | | | | | |
| FIADD source Integer add | | | Exceptions: I, D, O, P | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 120 | 102-137 | 1 | 2-4 | FIADD DISTANCE_TRAVELLED |
| short-integer | 125 | 108-143 | 2 | 2-4 | FIADD PULSE_COUNT [SI] |
| FICOM | | | | | |
| FICOM source Integer compare | | | Exceptions: I, D | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 80 | 72-86 | 1 | 2-4 | FICOM TOOL.N_PASSES |
| short-integer | 85 | 78-91 | 2 | 2-4 | FICOM [BP+4].PARAM_COUNT |
| FICOMP | | | | | |
| FICOMP source Integer compare and pop | | | Exceptions: I, D | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 82 | 74-88 | 1 | 2-4 | FICOMP [BP].LIMIT [SI] |
| short-integer | 87 | 80-93 | 2 | 2-4 | FICOMP N_SAMPLES |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FIDIV | | | | | |
|----------------|------------------|--|------------------------|------------------------------|---------------------------|
| | | FIDIV source Integer divide | | Exceptions: I, D, Z, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 230 | 224-238 | 1 | 2-4 | FIDIV SURVEY.OBSERVATIONS |
| short-integer | 236 | 230-243 | 2 | 2-4 | FIDIV RELATIVE_ANGLE [DI] |
| FIDIVR | | | | | |
| | | FIDIVR source Integer divide reversed | | Exceptions: I, D, Z, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 230 | 225-239 | 1 | 2-4 | FIDIVR [BP].X_COORD |
| short-integer | 237 | 231-245 | 2 | 2-4 | FIDIVR FREQUENCY |
| FILD | | | | | |
| | | FILD source Integer load | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 50 | 46-54 | 1 | 2-4 | FILD [BX].SEQUENCE |
| short-integer | 56 | 52-60 | 2 | 2-4 | FILD STANDOFF [DI] |
| long-integer | 64 | 60-68 | 4 | 2-4 | FILD RESPONSE.COUNT |
| FIMUL | | | | | |
| | | FIMUL source Integer multiply | | Exceptions: I, D, O, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 130 | 124-138 | 1 | 2-4 | FIMUL BEARING |
| short-integer | 136 | 130-144 | 2 | 2-4 | FIMUL POSITION.Z_AXIS |
| FINCSTP | | | | | |
| | | FINCSTP (no operands) Increment stack pointer | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 9 | 6-12 | 0 | 2 | FINCSTP |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| | | | | | |
|---------------------|------------------|--|------------------------|------------------------|-----------------------------|
| FINIT/FNINIT | | FINIT/FNINIT (no operands) Initialize processor | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 5 | 2-8 | 0 | 2 | FINIT |
| FIST | | FIST destination Integer store | | Exceptions: I, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 86 | 80-90 | 1 | 2-4 | FIST OBS.COUNT[SI] |
| short-integer | 88 | 82-92 | 2 | 2-4 | FIST [BP;].FACTORED_PULSES |
| FISTP | | FISTP destination Integer store and pop | | Exceptions: I, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 88 | 82-92 | 1 | 2-4 | FISTP [BX].ALPHA_COUNT [SI] |
| short-integer | 90 | 84-94 | 2 | 2-4 | FISTP CORRECTED_TIME |
| long-integer | 100 | 94-105 | 4 | 2-4 | FISTP PANEL.N_READINGS |
| FISUB | | FISUB source Integer subtract | | Exceptions: I, D, O, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 120 | 102-137 | 1 | 2-4 | FISUB BASE_FREQUENCY |
| short-integer | 125 | 108-143 | 2 | 2-4 | FISUB TRAIN_SIZE [DI] |
| FISUBR | | FISUBR source Integer subtract reversed | | Exceptions: I, D, O, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| word-integer | 120 | 103-139 | 1 | 2-4 | FISUBR FLOOR [BX] [SI] |
| short-integer | 125 | 109-144 | 2 | 2-4 | FISUBR BALANCE |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FLD | | | | | |
|---|------------------|-------|------------------------|------------|---------------------------|
| FLD source Load real | | | Exceptions: I, D | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i) | 20 | 17-22 | 0 | 2 | FLD ST(0) |
| short-real | 43 | 38-56 | 2 | 2-4 | FLD READING [SI].PRESSURE |
| long-real | 46 | 40-60 | 4 | 2-4 | FLD [BP].TEMPERATURE |
| temp-real | 57 | 53-65 | 5 | 2-4 | FLD SAVEREADING |
| FLDCW | | | | | |
| FLDCW source Load control word | | | Exceptions: None | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| 2-bytes | 10 | 7-14 | 1 | 2-4 | FLDCW CONTROL_WORD |
| FLDENV | | | | | |
| FLDENV source Load environment | | | Exceptions: None | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| 14-bytes | 40 | 35-45 | 7 | 2-4 | FLDENV [BP + 6] |
| FLDLG2 | | | | | |
| FLDLG2 (no operands) Load $\log_{10}2$ | | | Exceptions: I | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 21 | 18-24 | 0 | 2 | FLDLG2 |
| FLDLN2 | | | | | |
| FLDLN2 (no operands) Load \log_e2 | | | Exceptions: I | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 20 | 17-23 | 0 | 2 | FLDLN2 |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FLDL2E | | | | | |
|---------------|------------------|--|------------------------|---------------|----------------|
| | | FLDL2E (no operands) Load $\log_2 e$ | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 18 | 15-21 | 0 | 2 | FLDL2E |
| FLDL2T | | | | | |
| | | FLDL2T (no operands) Load $\log_2 10$ | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 19 | 16-22 | 0 | 2 | FLDL2T |
| FLDPI | | | | | |
| | | FLDPI (no operands) Load π | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 19 | 16-22 | 0 | 2 | FLDPI |
| FLDZ | | | | | |
| | | FLDZ (no operands) Load +0.0 | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 14 | 11-17 | 0 | 2 | FLDZ |
| FLD1 | | | | | |
| | | FLD1 (no operands) Load +1.0 | | Exceptions: I | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 18 | 15-21 | 0 | 2 | FLD1 |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FMUL | | FMUL //source/destination,source Multiply real | | Exceptions: I, D, O, U, P | |
|----------------------------------|------------------|--|------------------------|---|-------------------|
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST(i),ST/ST,ST(i) ¹ | 97 | 90-105 | 0 | 2 | FMUL ST,ST(3) |
| //ST(i),ST/ST,ST(i) | 138 | 130-145 | 0 | 2 | FMUL ST,ST(3) |
| short-real | 118 | 110-125 | 2 | 2-4 | FMUL SPEED_FACTOR |
| long-real ¹ | 120 | 112-126 | 4 | 2-4 | FMUL [BP].HEIGHT |
| long-real | 161 | 154-168 | 4 | 2-4 | FMUL [BP].HEIGHT |
| FMULP | | FMULP destination, source Multiply real and pop | | Exceptions: I, D, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i),ST ¹ | 100 | 94-108 | 0 | 2 | FMULP ST(1),ST |
| ST(i),ST | 142 | 134-148 | 0 | 2 | FMULP ST(1),ST |
| FNOP | | FNOP (no operands) No operation | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 13 | 10-16 | 0 | 2 | FNOP |
| FPATAN | | FPATAN (no operands) Partial arctangent | | Exceptions: U, P (operands not checked) | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 650 | 250-800 | 0 | 2 | FPATAN |
| FPREM | | FPREM (no operands) Partial remainder | | Exceptions: I, D, U | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 125 | 15-190 | 0 | 2 | FPREM |

¹Occurs when one or both operands is "short"—it has 40 trailing zeros in its fraction (e.g., it was loaded from a short-real memory operand).

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FPTAN | | | | | |
|---|------------------|--------|---|------------|----------------|
| FPTAN (no operands) Partial tangent | | | Exceptions: I, P (operands not checked) | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 450 | 30-540 | 0 | 2 | FPTAN |
| FRNDINT | | | | | |
| FRNDINT (no operands) Round to integer | | | Exceptions: I, P | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 45 | 16-50 | 0 | 2 | FRNDINT |
| FRSTOR | | | | | |
| FRSTOR source Restore saved state | | | Exceptions: None | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| 94-bytes | | 2 | 47 | 2-4 | FRSTOR [BP] |
| FSAVE/FNSAVE | | | | | |
| FSAVE/FNSAVE destination Save state | | | Exceptions: None | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| 94-bytes | | 3 | 47 | 2-4 | FSAVE [BP] |

²The 80287 execution clock count for this instruction is not meaningful in determining overall instruction execution time. For typical frequency ratios of the 80286 and 80287 clocks, 80287 execution occurs in parallel with the operand transfers, with the operand transfers determining the overall execution time of the instruction. For 80286:80287 clock frequency ratios of 4:8, 1:1, and 8:5, the overall execution clock count for this instruction is estimated at 490, 302, and 227 80287 clocks, respectively.

³The 80287 execution clock count for this instruction is not meaningful in determining overall instruction execution time. For typical frequency ratios of the 80286 and 80287 clocks, 80287 execution occurs in parallel with the operand transfers, with the operand transfers determining the overall execution time of the instruction. For 80286:80287 clock frequency ratios of 4:8, 1:1, and 8:5, the overall execution clock count for this instruction is estimated at 376, 233, and 174 80287 clocks, respectively.

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FSCALE | | | | | |
|----------------------------------|------------------|---|------------------------|-------------------------------|---|
| | | FSCALE (no operands) Scale | | Exceptions: I, O, U | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 35 | 32-38 | 0 | 2 | FSCALE |
| FSETPM | | | | | |
| | | FSETPM (no operands) Set protected mode | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | | 2-8 | 0 | 2 | FSETPM |
| FSQRT | | | | | |
| | | FSQRT (no operands) Square root | | Exceptions: I, D, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 183 | 180-186 | 0 | 2 | FSQRT |
| FST | | | | | |
| | | FST destination Store real | | Exceptions: I, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i) short-real long-real | 18 87 100 | 15-22 84-90 96-104 | 0 2 4 | 2 2-4 2-4 | FST ST(3) FST CORRELATION [DI] FST MEAN_READING |
| FSTCW / FNSTCW | | | | | |
| | | FSTCW destination Store control word | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| 2-bytes | 15 | 12-18 | 1 | 2-4 | FSTCW SAVE_CONTROL |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| | | | | | |
|----------------------------|------------------|---|------------------------|---------------------------|------------------------|
| FSTENV / FNSTENV | | FSTENV destination Store environment | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| 14-bytes | 45 | 40-50 | 7 | 2-4 | FSTENV [BP] |
| FSTP | | FSTP destination Store real and pop | | Exceptions: I, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| ST(i) | 20 | 17-24 | 0 | 2 | FSTP ST(2) |
| short-real | 89 | 86-92 | 2 | 2-4 | FSTP [BX].ADJUSTED_RPM |
| long-real | 102 | 98-106 | 4 | 2-4 | FSTP TOTAL_DOSAGE |
| temp-real | 55 | 52-58 | 5 | 2-4 | FSTP REG_SAVE [SI] |
| FSTSW / FNSTSW | | FSTSW destination Store status word | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| 2-bytes | 15 | 12-18 | 1 | 2-4 | FSTSW SAVE_STATUS |
| FSTSW AX / FNSTSWAX | | FSTSW AX Store status word to AX | | Exceptions: None | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| AX | | 10-16 | 1 | 2 | FSTSW AX |
| FSUB | | FSUB //source/destination,source Subtract real | | Exceptions: I, D, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST,ST(i)/ST(i),ST | 85 | 70-100 | 0 | 2 | FSUB ST,ST(2) |
| short-real | 105 | 90-120 | 2 | 2-4 | FSUB BASE_VALUE |
| long-real | 110 | 95-125 | 4 | 2-4 | FSUB COORDINATE.X |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| | | | | | | | |
|--|------------------|----------------------------|------------------------|-----------------|--|------------------------------------|--|
| FSUBP FSUBP destination, source Subtract real and pop | | | | | | Exceptions: I, D, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example | | |
| | Typical | Range | | | | | |
| ST(i),ST | 90 | 75-105 | 0 | 2 | FSUBP ST(2),ST | | |
| FSUBR FSUBR //source/destination, source Subtract real reversed | | | | | | Exceptions: I, D, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example | | |
| | Typical | Range | | | | | |
| //ST,ST(i)/ST(i),ST short-real long-real | 87 105 110 | 70-100 90-120 95-125 | 0 2 4 | 2 2-4 2-4 | FSUBR ST,ST(1) FSUBR VECTOR[SI] FSUBR [BX].INDEX | | |
| FSUBRP FSUBRP destination, source Subtract real reversed and pop | | | | | | Exceptions: I, D, O, U, P | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example | | |
| | Typical | Range | | | | | |
| ST(i),ST | 90 | 75-105 | 0 | 2 | FSUBRP ST(1),ST | | |
| FTST FTST (no operands) Test stack top against +0.0 | | | | | | Exceptions: I, D | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example | | |
| | Typical | Range | | | | | |
| (no operands) | 42 | 38-48 | 0 | 2 | FTST | | |
| FWAIT FWAIT (no operands) (CPU) Wait while 80287 is busy | | | | | | Exceptions: None (CPU instruction) | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example | | |
| | Typical | Range | | | | | |
| (no operands) | 3+5n* | 3+5n ⁴ | 0 | 1 | FWAIT | | |

*n = number of times CPU examines $\overline{\text{BUSY}}$ line before 80287 completes execution of previous instruction.

Table 2-14. Instruction Set Reference Data (Cont'd.)

| FXAM | | | | | |
|--|------------------|----------|--------------------------------------|------------|----------------|
| FXAM (no operands) Examine stack top | | | Exceptions: None | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 17 | 12-23 | 0 | 2 | FXAM |
| FXCH | | | | | |
| FXCH //destination Exchange registers | | | Exceptions: I | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| //ST(i) | 12 | 10-15 | 0 | 2 | FXCH ST(2) |
| FTRACT | | | | | |
| FTRACT (no operands) Extract exponent and significant | | | Exceptions: I | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 50 | 27-55 | 0 | 2 | FTRACT |
| FYL2X | | | | | |
| FYL2X (no operands) $Y \cdot \log_2 X$ | | | Exceptions: P (operands not checked) | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 950 | 900-1100 | 0 | 2 | FYL2X |
| FYL2XP1 | | | | | |
| FYL2XP1 (no operands) $Y \cdot \log_2(X + 1)$ | | | Exceptions: P (operands not checked) | | |
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 850 | 700-1000 | 0 | 2 | FYL2XP1 |

Table 2-14. Instruction Set Reference Data (Cont'd.)

| F2XM1 | | F2XM1 (no operands) 2^x-1 | | Exceptions: U, P (operands not checked) | |
|-----------------|-------------------------|--|-------------------------------|--|-----------------------|
| Operands | Execution Clocks | | Operand Word Transfers | Code Bytes | Coding Example |
| | Typical | Range | | | |
| (no operands) | 500 | 310-630 | 0 | 2 | F2XM1 |

PROGRAMMING FACILITIES

As described previously, the 80287 NPX is programmed simply as an extension of the 80286 CPU. This section describes how programmers in ASM286 and in a variety of higher-level languages can work with the 80287.

The level of detail in this section is intended to give programmers a basic understanding of the software tools that can be used with the 80287, but this information does not document the full capabilities of these facilities. For a complete list of documentation on all the languages available for iAPX 286 systems, readers should consult Intel's *Literature Guide*.

High-Level Languages

For programmers using high-level languages, the programming and operation of the NPX is handled automatically by the compiler. A variety of Intel high-level languages are available that automatically make use of the 80287 NPX when appropriate. These languages include

- PL/M-286
- FORTRAN-286
- PASCAL-286
- C-286

Each of these high-level languages has special numeric libraries allowing programs to take advantage of the capabilities of the 80287 NPX. No special programming conventions are necessary to make use of the 80287 NPX when programming numeric applications in any of these languages.

Programmers in PL/M-286 and ASM286 can also make use of many of these library routines by using routines contained in the 80287 Support Library, described in the *80287 Support Library Reference Manual*, Order Number 122129. These library routines provide many of the functions provided by higher-level languages, including exception handlers, ASCII-to-floating-point conversions, and a more complete set of transcendental functions than that provided by the 80287 instruction set.

PL/M-286

Programmers in PL/M-286 can access a very useful subset of the 80287's numeric capabilities. The PL/M-286 REAL data type corresponds to the NPX's short real (32-bit) format. This data type provides a range of about $8.43 \times 10^{-37} \leq \text{ABS}(X) \leq 3.38 \times 10^{38}$, with about seven significant decimal digits. This representation is adequate for the data manipulated by many microcomputer applications.

The utility of the REAL data type is extended by the PL/M-286 compiler's practice of holding intermediate results in the 80287's temporary real format. This means that the full range and precision of the processor are utilized for intermediate results. Underflow, overflow, and rounding errors are most likely to occur during intermediate computations rather than during calculation of an expression's final result. Holding intermediate results in temporary real format greatly reduces the likelihood of overflow and underflow and eliminates roundoff as a serious source of error until the final assignment of the result is performed.

The compiler generates 80287 code to evaluate expressions that contain REAL data types, whether variables or constants or both. This means that addition, subtraction, multiplication, division, comparison, and assignment of REALs will be performed by the NPX. INTEGER expressions, on the other hand, are evaluated on the CPU.

Five built-in procedures (table 2-15) give the PL/M-286 programmer access to 80287 functions manipulated by the processor control instructions. Prior to any arithmetic operations, a typical PL/M-286 program will set up the NPX after power up using the INIT\$REAL\$MATH\$UNIT procedure and then issue SET\$REAL\$MODE to configure the NPX. SET\$REAL\$MODE loads the 80287 control word, and its 16-bit parameter has the format shown in figure 1-5. The recommended value of this parameter is 033EH (projective closure, round to nearest, 64-bit precision, all exceptions masked except invalid operation). Other settings may be used at the programmer's discretion.

If any exceptions are unmasked, an exception handler must be provided in the form of an interrupt procedure that is designated to be invoked by CPU interrupt pointer (vector) number 16. The exception handler can use the GET\$REAL\$ERROR procedure to obtain the low-order byte of the 80287 status word and to then clear the exception flags. The byte returned by GET\$REAL\$ERROR contains the exception flags; these can be examined to determine the source of the exception.

The SAVE\$REAL\$STATUS and RESTORE\$REAL\$STATUS procedures are provided for multi-tasking environments where a running task that uses the 80287 may be preempted by another task that also uses the 80287. It is the responsibility of the preempting task to issue SAVE\$REAL\$STATUS before it executes any statements that affect the 80287; these include the INIT\$REAL\$MATH\$UNIT and SET\$REAL\$MODE procedures as well as arithmetic expressions. SAVE\$REAL\$STATUS saves the 80287 state (registers, status, and control words, etc.) on the CPU's stack. RESTORE\$REAL\$STATUS reloads the state information; the preempting task must invoke this procedure before terminating in order to restore the 80287 to its state at the time the running task was preempted. This enables the preempted task to resume execution from the point of its preemption.

Table 2-15. PL/M-286 Built-In Procedures

| Procedure | 80287 Instruction | Description |
|---------------------------------------|-------------------|---|
| INIT\$REAL\$MATH\$UNIT ⁽¹⁾ | FINIT | Initialize processor. |
| SET\$REAL\$MODE | FLDCW | Set exception masks, rounding precision, and infinity controls. |
| GET\$REAL\$ERROR ⁽²⁾ | FNSTSW & FNCLEX | Store, then clear, exception flags. |
| SAVE\$REAL\$STATUS | FNSAVE | Save processor state. |
| RESTORE\$REAL\$STATUS | FRSTOR | Restore processor state. |

⁽¹⁾Also initializes interrupt pointers for emulation.

⁽²⁾Returns low-order byte of status word.

ASM286

The ASM286 assembly language provides programmers with complete access to all of the facilities of the 80286 and 80287 processors.

The programmer's view of the iAPX 286/20 hardware is a single machine with these resources:

- 160 instructions
- 12 data types
- 8 general registers
- 4 segment registers
- 8 floating-point registers, organized as a stack

DEFINING DATA

The ASM286 directives shown in table 2-16 allocate storage for 80287 variables and constants. As with other storage allocation directives, the assembler associates a type with any variable defined with these directives. The type value is equal to the length of the storage unit in bytes (10 for DT, 8 for DQ, etc.). The assembler checks the type of any variable coded in an instruction to be certain that it is compatible with the instruction. For example, the coding `FIADD ALPHA` will be flagged as an error if ALPHA's type is not 2 or 4, because integer addition is only available for word and short integer data types. The operand's type also tells the assembler which machine instruction to produce; although to the programmer there is only an `FIADD` instruction, a different machine instruction is required for each operand type.

On occasion it is desirable to use an instruction with an operand that has no declared type. For example, if register `BX` points to a short integer variable, a programmer may want to code `FIADD [BX]`. This can be done by informing the assembler of the operand's type in the instruction, coding `FIADD DWORD PTR [BX]`. The corresponding overrides for the other storage allocations are `WORD PTR`, `QWORD PTR`, and `TBYTE PTR`.

The assembler does not, however, check the types of operands used in processor control instructions. Coding `FRSTOR [BP]` implies that the programmer has set up register `BP` to point to the stack location where the processor's 94-byte state record has been previously saved.

The initial values for 80287 constants may be coded in several different ways. Binary integer constants may be specified as bit strings, decimal integers, octal integers, or hexadecimal strings. Packed decimal values are normally written as decimal integers, although the assembler will accept and convert other representations of integers. Real values may be written as ordinary decimal real numbers (decimal point required), as decimal numbers in scientific notation, or as hexadecimal strings. Using hexadecimal strings is primarily intended for defining special values such as infinities, NaNs, and nonnormalized

Table 2-16. 80287 Storage Allocation Directives

| Directive | Interpretation | Data Types |
|-----------|-------------------|--------------------------------|
| DW | Define Word | Word integer |
| DD | Define Doubleword | Short integer, short real |
| DQ | Define Quadword | Long integer, long real |
| DT | Define Tenbyte | Packed decimal, temporary real |

numbers. Most programmers will find that ordinary decimal and scientific decimal provide the simplest way to initialize 80287 constants. Figure 2-3 compares several ways of setting the various 80287 data types to the same initial value.

Note that preceding 80287 variables and constants with the ASM286 EVEN directive ensures that the operands will be word-aligned in memory. This will produce the best system performance. All 80287 data types occupy integral numbers of words so that no storage is “wasted” if blocks of variables are defined together and preceded by a single EVEN declarative.

RECORDS AND STRUCTURES

The ASM286 RECORD and STRUC (structure) declaratives can be very useful in NPX programming. The record facility can be used to define the bit fields of the control, status, and tag words. Figure 2-4 shows one definition of the status word and how it might be used in a routine that polls the 80287 until it has completed an instruction.

Because STRUCTures allow different but related data types to be grouped together, they often provide a natural way to represent “real world” data organizations. The fact that the structure template may be “moved” about in memory adds to its flexibility. Figure 2-5 shows a simple structure that might be used to represent data consisting of a series of test score samples. A structure could also be used to define the organization of the information stored and loaded by the FSTENV and FLDENV instructions.

ADDRESSING MODES

80287 memory data can be accessed with any of the CPU’s five memory addressing modes. This means that 80287 data types can be incorporated in data aggregates ranging from simple to complex according to the needs of the application. The addressing modes, and the ASM286 notation used to specify them in instructions, make the accessing of structures, arrays, arrays of structures, and other organizations direct and straightforward. Table 2-17 gives several examples of 80287 instructions coded with operands that illustrate different addressing modes.

```

; THE FOLLOWING ALL ALLOCATE THE CONSTANT: -126
; NOTE TWO'S COMPLETE STORAGE OF NEGATIVE BINARY INTEGERS.
;
; EVEN                                ; FORCE WORD ALIGNMENT
WORD_INTEGER    DW  111111111000010B ; BIT STRING
SHORT_INTEGER   DD  0FFFFFF82H       ; HEX STRING MUST START
                                           ; WITH DIGIT
LONG_INTEGER    DQ  -126              ; ORDINARY DECIMAL
SHORT_REAL      DD  -126.0            ; NOTE PRESENCE OF '.'
LONG_REAL       DD  -1.26E2           ; "SCIENTIFIC"
PACKED_DECIMAL  DT  -126              ; ORDINARY DECIMAL INTEGER
; IN THE FOLLOWING, SIGN AND EXPONENT IS 'C005'
;   SIGNIFICAND IS '7E00...00', 'R' INFORMS ASSEMBLER THAT
;   THE STRING REPRESENTS A REAL DATA TYPE.
;
TEMP_REAL       DT  0C0057E0000000000000000R ; HEX STRING

```

Figure 2-3. Sample 80287 Constants

```

; RESERVE SPACE FOR STATUS WORD
STATUS_WORD
; LAY OUT STATUS WORD FIELDS
STATUS RECORD
&   BUSY:                1,
&   COND_CODE3:         1,
&   STACK_TOP:          3,
&   COND_CODE2:         1,
&   COND_CODE1:         1,
&   COND_CODE0:         1,
&   INT_REQ:            1,
&   RESERVED:          1,
&   P_FLAG:             1,
&   U_FLAG:             1,
&   O_FLAG:             1,
&   Z_FLAG:             1,
&   D_FLAG:             1,
&   I_FLAG:             1
; POLL STATUS WORD UNTIL 80287 IS NOT BUSY
POLL:  FNSTSW  STATUS_WORD
       TEST   STATUS_WORD, MASK_BUSY
       JNZ   POLL
    
```

Figure 2-4. Status Word RECORD Definition

```

SAMPLE      STRUC

  N_OBS      DD      ? ; SHORT INTEGER
  MEAN       DQ      ? ; LONG REAL
  MODE       DW      ? ; WORD INTEGER
  STD_DEV    DQ      ? ; LONG REAL
  ; ARRAY OF OBSERVATIONS -- WORD INTEGER
  TEST_SCORES DW     1000 DUP (?)
SAMPLE ENDS
    
```

Figure 2-5. Structure Definition

Table 2-17. Addressing Mode Examples

| Coding | Interpretation |
|---------------------------|---|
| FIADD ALPHA | ALPHA is a simple scalar (mode is direct). |
| FDIVR ALPHA.BETA | BETA is a field in a structure that is "overlaid" on ALPHA (mode is direct). |
| FMUL QWORD PTR [BX] | BX contains the address of a long real variable (mode is register indirect). |
| FSUB ALPHA [SI] | ALPHA is an array and SI contains the offset of an array element from the start of the array (mode is indexed). |

Table 2-17. Addressing Mode Examples (Cont'd.)

| Coding | | Interpretation |
|--------|---------------------|---|
| FILD | [BP].BETA | BP contains the address of a structure on the CPU stack and BETA is a field in the structure (mode is based). |
| FBLD | TBYTE PTR [BX] [DI] | BX contains the address of a packed decimal array and DI contains the offset of an array element (mode is based indexed). |

Comparative Programming Example

Figures 2-6 and 2-7 show the PL/M-286 and ASM286 code for a simple 80287 program, called ARRSUM. The program references an array (X\$ARRAY), which contains 0–100 short real values; the integer variable N\$OF\$X indicates the number of array elements the program is to consider. ARRSUM steps through X\$ARRAY accumulating three sums:

- SUM\$X, the sum of the array values
- SUM\$INDEXES, the sum of each array value times its index, where the index of the first element is 1, the second is 2, etc.
- SUM\$\$SQUARES, the sum of each array element squared

(A true program, of course, would go beyond these steps to store and use the results of these calculations.) The control word is set with the recommended values: projective closure, round to nearest, 64-bit precision, interrupts enabled, and all exceptions masked invalid operation. It is assumed that an exception handler has been written to field the invalid operation, if it occurs, and that it is invoked by interrupt pointer 16. Either version of the program will run on an actual or an emulated 80287 without altering the code shown.

The PL/M-286 version of ARRSUM (figure 2-6) is very straightforward and illustrates how easily the 80287 can be used in this language. After declaring variables the program calls built-in procedures to initialize the processor (or its emulator) and to load to the control word. The program clears the sum variables and then steps through X\$ARRAY with a DO-loop. The loop control takes into account PL/M-286's practice of considering the index of the first element of an array to be 0. In the computation of SUM\$INDEXES, the built-in procedure FLOAT converts I+1 from integer to real because the language does not support "mixed mode" arithmetic. One of the strengths of the NPX, of course, is that it *does* support arithmetic on mixed data types (because all values are converted internally to the 80-bit temporary real format).

The ASM286 version (figure 2-7) defines the external procedure INIT287, which makes the different initialization requirements of the processor and its emulator transparent to the source code. After defining the data and setting up the segment registers and stack pointer, the program calls INIT287 and loads the control word. The computation begins with the next three instructions, which clear three registers by loading (pushing) zeros onto the stack. As shown in figure 2-8, these registers remain at the bottom of the stack throughout the computation while temporary values are pushed on and popped off the stack above them.

The program uses the CPU LOOP instruction to control its iteration through X_ARRAY; register CX, which LOOP automatically decrements, is loaded with N_OF_X, the number of array elements to be summed. Register SI is used to select (index) the array elements. The program steps through X_ARRAY from back to front, so SI is initialized to point at the element just beyond the first element to be processed. The ASM286 TYPE operator is used to determine the number of bytes in each array element. This permits changing X_ARRAY to a long real array by simply changing its definition (DD to DQ) and reassembling.

PL/M-286 COMPILER ARRAYSUM

SERIES-III PL/M-286 V1.0 COMPILATION OF MODULE ARRAYSUM
 OBJECT MODULE PLACED IN :F6:D:OBJ
 COMPILER INVOKED BY: PLM286.86 :F6:D:SRC XREF

```

/*****
*
*   A R R A Y S U M   M O D
*
*****/

1      array$sum: do;

2  1    declare (sum$x, sum$indexes, sum$squares) real;
3  1    declare x$array(100) real;
4  1    declare (n$of$x, i) integer;
5  1    declare control$287 literally '033eh';

      /* Assume x$array and n$of$x are initialized */

      /* Prepare the 80287 of its emulator */
6  1    call init$real$math$unit;
7  1    call set$real$mode(control$287);

      /* Clear sums */
8  1    sum$x, sum$indexes, sum$squares = 0.0;

      /* Loop through array, accumulating sums */
9  1    do i = 0 to n$of$x-1;
10  2    sum$x = sum$x + x$array(i);
11  2    sum$indexes = sum$indexes +
      (x$array(i) * float(i+1));
12  2    sum$squares = sum$squares + (x$array(i)*x$array(i));
13  2    end;

      /* etc. */

14 1    end array$sum;

```

PL/M-286 COMPILER ARRAYSUM
 CROSS-REFERENCE LISTING

| DEFN | ADDR | SIZE | NAME, ATTRIBUTES, AND REFERENCES |
|------|-------|------|--|
| 1 | 0006H | 117 | ARRAYSUM PROCEDURE STACK=0002H |
| 5 | | | CONTROL287 LITERALLY '033eh' 7 |
| | | | FLOAT BUILTIN 11 |
| 4 | 019EH | 2 | I INTEGER 9* 9 10 11 12 13 |
| | | | INITREALMATHUNIT BUILTIN 6 |
| 4 | 019CH | 2 | NDFX INTEGER 9 |
| | | | SETREALMODE BUILTIN 7 |
| 2 | 0004H | 4 | SUMINDEXES REAL 8* 11 11* |
| 2 | 0008H | 4 | SUMSQUARES REAL 8* 12 12* |
| 2 | 0000H | 4 | SUMX REAL 8* 10 10* |
| 3 | 000CH | 400 | XARRAY REAL ARRAY(100) 10 11 12 |

MODULE INFORMATION:

```

CODE AREA SIZE        = 0077H    119D
CONSTANT AREA SIZE = 0004H     4D
VARIABLE AREA SIZE = 01A0H    416D
MAXIMUM STACK SIZE = 0002H     2D
33 LINES READ
0 PROGRAM WARNINGS
0 PROGRAM ERRORS

```

DICTIONARY SUMMARY:

```

96KB MEMORY AVAILABLE
3KB MEMORY USED        (3%)
0KB DISK SPACE USED

```

END OF PL/M-286 COMPILATION

Figure 2-6. Sample PL/M-286 Program

```

iAPX286 MACRO ASSEMBLER      EXAMPLE_ASM286_PROGRAM

SERIES-III iAPX286 MACRO ASSEMBLER X10B ASSEMBLY OF MODULE EXAMPLE_ASM286_PROGRAM
OBJECT MODULE PLACED IN :F6:287EXP.OBJ
ASSEMBLER INVOKED BY:  ASM286.86 :F6:287EXP.SRC XREF

LOC  OBJ          LINE      SOURCE
-----
1          name      example_ASM286_program
2          ; Define initialization routine
3          extrn     init287:far
4
5          ; Allocate space for data
6          data     segment rw public
0000 3E03      control_287    dw      033eh
0002 ????      n_of_x        dw      ?
0004 100       x_array       dd      100 dup (?)
          )
0194 ????????? sum_squares   dd      ?
0198 ????????? sum_indexes   dd      ?
019C ????????? sum_x         dd      ?
-----
13         data     ends
14
15         ; Allocate CPU stack space
16         stack    stackseg 400
17
18         ; Begin code
19         code     segment er public
20         assume   ds:data, ss:stack, es:nothing
0000      21         start:
0000 8B-----   R 22         mov     ax,data
0003 8ED8      23         mov     ds,ax
0005 8B-----   R 24         mov     ax,stack
0008 8ED0      25         mov     ss,ax
000A BCFEFF    R 26         mov     sp,stackstart stack
27
28         ; Assume x_array and n_of_x are initialized
29         ; this program zeroes n_of_x
30
31         ; Prepare the 80287 or its emulator.
000D 9A0000----   E 32         call   init287
0012 D92E0000    R 33         fldcw  control_287
34
35         ; Clear three registers to hold running sums
0016 D9EE      36         fldz
0018 D9EE      37         fldz
001A D9EE      38         fldz
39
40         ; Setup CX as loop counter and
41         ; SI as index to x_array
001C 8B0E0200    R 42         mov     cx,n_of_x
0020 F7E9      43         imul  cx
0022 8BFO      44         mov     si,ax
45
46         ; SI now contains index of last element + 1
47         ; Loop thru x_array, accumulating sums
0024      48         sum_next:
0024 83EE04      49         sub     si,type x_array ;backup one element
0027 D9840400    R 50         fld     x_array[si] ;push it on the stack
002B DCC3      51         fadd  st(3),st ;add into sum of x
002D D9C0      52         fld     st ;duplicate x on top
002F DCC8      53         fmul  st,st ;square it
0031 DEC2      54         faddp st(2),st ;add into sum of (index*x)
          ; and discard
0033 FF0E0200    R 55         dec     n_of_x ;reduce index for next iteration
0037 E2EB      56         loop  sum_next ;continue
57
58
59         ; Pop running sums into memory
0039      60         pop_results:
0039 D91E9401    R 61         fstp  sum_squares
003D D91E9B01    R 62         fstp  sum_indexes
0041 D91E9C01    R 63         fstp  sum_x
0045 9B        64         fwait
65
66         ;
67         ; Etc.
68         ;
-----
69         code     ends
70         end      start

```

Figure 2-7. Sample ASM286 Program

```

iAPX286 MACRO ASSEMBLER      EXAMPLE_ASM286_PROGRAM
XREF SYMBOL TABLE LISTING
-----
NAME          TYPE      VALUE  ATTRIBUTES, XREFS
CODE          SEGMENT   SIZE=0046H ER PUBLIC  19# 69
CONTROL_287  V WORD   0000H  DATA  7# 33
DATA         .SEGMENT   SIZE=01A0H RW PUBLIC  6# 13 20 22
INIT287     L FAR    0000H  EXTRN  3# 32
N_OF_X      V WORD   0002H  DATA  8# 42 56
PDP_RESULTS L NEAR   0039H  CODE   60#
STACK       STACK    0000H  SIZE=0190H RW PUBLIC  16# 20 24 26
START       L NEAR   0000H  CODE   21# 70
SUM_INDEXES V DWORD  0198H  DATA  11# 62
SUM_NEXT    L NEAR   0024H  CODE   48# 57
SUM_SQUARES V DWORD  0194H  DATA  10# 61
SUM_X       V DWORD  019CH  DATA  12# 63
X_ARRAY     V DWORD  0004H  (100) DATA  9# 49 50

END OF SYMBOL TABLE LISTING

ASSEMBLY COMPLETE.                NO ERRORS

```

Figure 2-7. Sample ASM286 Program (Cont'd.)

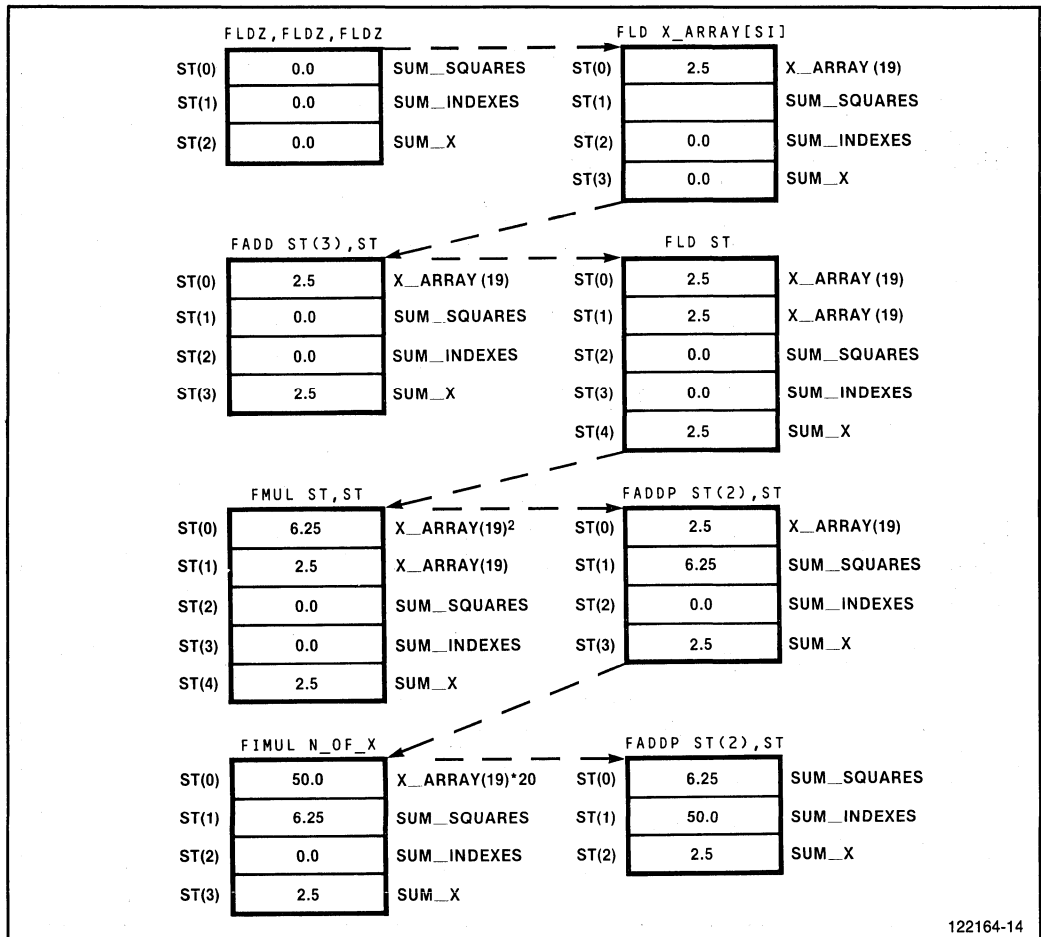


Figure 2-8. Instructions and Register Stack

Figure 2-8 shows the effect of the instructions in the program loop on the NPX register stack. The figure assumes that the program is in its first iteration, that `N_OF_X` is 20, and that `X_ARRAY(19)` (the 20th element) contains the value 2.5. When the loop terminates, the three sums are left as the top stack elements so that the program ends by simply popping them into memory variables.

80287 Emulation

The programming of applications to execute on both iAPX 286/10 and iAPX 286/20 systems is made much easier by the existence of an 80287 emulator for iAPX 286/10 systems. The Intel E80287 emulator offers a complete software counterpart to the 80287 hardware; NPX instructions can be simply emulated in software rather than being executed in hardware. With software emulation, the distinction between iAPX 286/10 and iAPX 286/20 systems is reduced to a simple performance differential. Identical numeric programs will simply execute more slowly on iAPX 286/10 systems (using software emulation of NPX instructions) than on iAPX 286/20 systems (executing NPX instructions directly).

When incorporated into the systems software, the emulation of NPX instructions on iAPX 286/10 systems is completely transparent to the programmer. Applications software needs no special libraries, linking, or other activity to allow it to run on an iAPX 286/10 with 80287 emulation.

To the applications programmer, the development of programs for iAPX 286 systems is the same whether the 80287 NPX hardware is available or not. The full iAPX 286/20 instruction set is available for use, with NPX instructions being either emulated or executed directly. Applications programmers need not be concerned with the hardware configuration of the computer systems on which their applications will eventually run.

For systems programmers, details relating to 80287 emulators are described in a later section of this supplement. An E80287 software emulator for iAPX 286/10 systems is contained in the iMDX 364 8086 Software Toolbox, available from Intel and described in the *8086 Software Toolbox Manual*.

CONCURRENT PROCESSING WITH THE 80287

Because the 80286 CPU and the 80287 NPX have separate execution units, it is possible for the NPX to execute numeric instructions in parallel with instructions executed by the CPU. This simultaneous execution of different instructions is called concurrency.

No special programming techniques are required to gain the advantages of concurrent execution; numeric instructions for the NPX are simply placed in line with the instructions for the CPU. CPU and numeric instructions are initiated in the same order as they are encountered by the CPU in its instruction stream. However, because numeric operations performed by the NPX generally require more time than operations performed by the CPU, the CPU can often execute several of its instructions before the NPX completes a numeric instruction previously initiated.

This concurrency offers obvious advantages in terms of execution performance, but concurrency also imposes several rules that must be observed in order to assure proper synchronization of the 80286 CPU and 80287 NPX.

All Intel high-level languages automatically provide for and manage concurrency in the NPX. Assembly-language programmers, however, must understand and manage some areas of concurrency in exchange for the flexibility and performance of programming in assembly language. This section is for the assembly-language programmer or well-informed high-level-language programmer.

Managing Concurrency

Concurrent execution of the host and 80287 is easy to establish and maintain. The activities of numeric programs can be split into two major areas: program control and arithmetic. The program control part performs activities such as deciding what functions to perform, calculating addresses of numeric operands, and loop control. The arithmetic part simply adds, subtracts, multiplies, and performs other operations on the numeric operands. The NPX and host are designed to handle these two parts separately and efficiently.

Managing concurrency is necessary because both the arithmetic and control areas must converge to a well-defined state before starting another numeric operation. A well-defined state means all previous arithmetic and control operations are complete and valid.

Normally, the host waits for the 80287 to finish the current numeric operation before starting another. This waiting is called synchronization.

Managing concurrent execution of the 80287 involves three types of synchronization:

1. Instruction synchronization
2. Data synchronization
3. Error synchronization

For programmers in higher-level languages, all three types of synchronization are automatically provided by the appropriate compiler. For assembly-language programmers, instruction synchronization is guaranteed by the NPX interface, but data and error synchronization are the responsibility of the assembly-language programmer.

Instruction Synchronization

Instruction synchronization is required because the 80287 can perform only one numeric operation at a time. Before any numeric operation is started, the 80287 must have completed all activity from its previous instruction.

Instruction synchronization is guaranteed for most ESC instructions because the 80286 automatically checks the BUSY status line from the 80287 before commencing execution of most ESC instructions. No explicit WAIT instructions are necessary to ensure proper instruction synchronization.

Data Synchronization

Data synchronization addresses the issue of both the CPU and the NPX referencing the same memory values within a given block of code. Synchronization ensures that these two processors access the memory operands in the proper sequence, just as they would be accessed by a single processor with no concurrency. Data synchronization is not a concern when the CPU and NPX are using different memory operands during the course of one numeric instruction.

The two cases where data synchronization might be a concern are

1. The 80286 CPU reads or alters a memory operand first, then invokes the 80287 to load or alter the same operand.
2. The 80287 is invoked to load or alter a memory operand, after which the 80286 CPU reads or alters the same location.

Due to the instruction synchronization of the NPX interface, data synchronization is automatically provided for the first case—the 80286 will always complete its operation before invoking the 80287.

For the second case, data synchronization is not always automatic. In general, there is no guarantee that the 80287 will have finished its processing and accessed the memory operand before the 80286 accesses the same location.

Figure 2-9 shows examples of the two possible cases of the CPU and NPX sharing a memory value. In the examples of the first case, the CPU will finish with the operand before the 80287 can reference it. The NPX interface guarantees this. In the examples of the second case, the CPU must wait for the 80287 to finish with the memory operand before proceeding to reuse it. The FWAIT instructions shown in these examples are required in order to ensure this data synchronization.

There are several NPX control instructions where automatic data synchronization is provided; however, the FSTSW/FNSTSW, FSTCW/FNSTCW, FLDCW, FRSTOR, and FLDENV instructions are all guaranteed to finish their execution before the CPU can read or alter the referenced memory locations.

The 80287 provides data synchronization for these instructions by making a request on the Processor Extension Data Channel before the CPU executes its next instruction. Since the NPX data transfers occur before the CPU regains control of the local bus, the CPU cannot change a memory value before the NPX has had a chance to reference it. In the case of the FSTSW AX instruction, the 80286 AX register is explicitly updated before the CPU continues execution of the next instruction.

For the numeric instructions not listed above, the assembly-language programmer must remain aware of synchronization and recognize cases requiring explicit data synchronization. Data synchronization can be provided either by programming an explicit FWAIT instruction, or by initiating a subsequent numeric instruction before accessing the operands or results of a previous instruction. After the subsequent numeric instruction has started execution, all memory references in earlier numeric instructions are complete. Reaching the next host instruction after the synchronizing numeric instruction indicates that previous numeric operands in memory are available.

The data-synchronization function of any FWAIT or numeric instruction must be well-documented, as shown in figure 2-10. Otherwise, a change to the program at a later time may remove the synchronizing numeric instruction and cause program failure.

| Case 1: | Case 2: |
|-----------|-----------|
| MOV I, 1 | FILD I |
| FILD I | FWAIT |
| | MOV I, 5 |
| MOV AX, I | FISTP I |
| FISTP I | FWAIT |
| | MOV AX, I |

Figure 2-9. Synchronizing References to Shared Data

| | |
|-----------|--|
| FISTP I | |
| FMUL | ; I is updated before FMUL is executed |
| MOV AX, I | ; I is now safe to use |

Figure 2-10. Documenting Data Synchronization

High-level languages automatically establish data synchronization and manage it, but there may be applications where a high-level language may not be appropriate.

For assembly-language programmers, *automatic* data synchronization can be obtained using the assembler, although concurrency of execution is lost as a result. To perform automatic data synchronization, the assembler can be changed to always place a WAIT instruction after the ESCAPE instruction. Figure 2-11 shows an example of how to change the ASM286 Code Macro for the FIST instruction to automatically place a WAIT instruction after the ESCAPE instruction. This Code Macro is included in the ASM286 source module. The price paid for this automatic data synchronization is the lack of any possible concurrency between the CPU and NPX.

Error Synchronization

Almost any numeric instruction can, under the wrong circumstances, produce a numeric error. Concurrent execution of the CPU and NPX requires synchronization for these errors just as it does for data references and numeric instructions. In fact, the synchronization required for data and instructions automatically provides error synchronization.

However, incorrect data or instruction synchronization may not be discovered until a numeric error occurs. A further complication is that a programmer may not expect his numeric program to cause numeric errors, but in some systems, they may regularly happen. To better understand these points, let's look at what can happen when the NPX detects an error.

The NPX can perform one of two things when a numeric exception occurs:

- The NPX can provide a default fix-up for selected numeric errors. Programs can mask individual error types to indicate that the NPX should generate a safe, reasonable result whenever that error occurs. The default error fix-up activity is treated by the NPX as part of the instruction causing the error; no external indication of the error is given. When errors are detected, a flag is set in the numeric status register, but no information regarding where or when is available. If the NPX performs its default action for all errors, then error synchronization is never exercised. This is no reason to ignore error synchronization, however.
- As an alternative to the NPX default fix-up of numeric errors, the 80286 CPU can be notified whenever an exception occurs. The CPU can then implement any sort of recovery procedures desired, for any numeric error detectable by the NPX. When a numeric error is unmasked and the error

```
;
; This is an ASM286 code macro to redefine the FIST
; instruction to prevent any concurrency
; while the instruction runs. A wait
; instruction is placed immediately after the
; escape to ensure the store is done
; before the program may continue.
;
CodeMacro FIST memop: Mw
RfixM 111B, memop
ModRM 010B, memop
RWfix
EndM
```

Figure 2-11. Nonconcurrent FIST Instruction CodeMacro

occurs, the NPX stops further execution of the numeric instruction and signals this event to the CPU. On the next occurrence of an ESC or WAIT instruction, the CPU traps to a software exception handler. Some ESC instructions do not check for errors. These are the nonwaited forms FNINIT, FNSTENV, FNSAVE, FNSTSW, FNSTCW, and FNCLEX.

When the NPX signals an unmasked exception condition, it is requesting help. The fact that the error was unmasked indicates that further numeric program execution under the arithmetic and programming rules of the NPX is unreasonable.

If concurrent execution is allowed, the state of the CPU when it recognizes the exception is undefined. The CPU may have changed many of its internal registers and be executing a totally different program by the time the exception occurs. To handle this situation, the NPX has special registers updated at the start of each numeric instruction to describe the state of the numeric program when the failed instruction was attempted.

Error synchronization ensures that the NPX is in a well-defined state after an unmasked numeric error occurs. Without a well-defined state, it would be impossible for exception recovery routines to figure out why the numeric error occurred, or to recover successfully from the error.

INCORRECT ERROR SYNCHRONIZATION

An example of how some instructions written without error synchronization will work initially, but fail when moved into a new environment is shown in figure 2-12.

In figure 2-12, three instructions are shown to load an integer, calculate its square root, then increment the integer. The NPX interface and synchronous execution of the NPX emulator will allow this program to execute correctly when no errors occur on the FILD instruction.

This situation changes if the 80287 numeric register stack is extended to memory. To extend the NPX stack to memory, the invalid error is unmasked. A push to a full register or pop from an empty register will cause an invalid error. The recovery routine for the error must recognize this situation, fix up the stack, then perform the original operation.

The recovery routine will not work correctly in the first example shown in the figure. The problem is that the value of COUNT is incremented before the NPX can signal the exception to the CPU. Because COUNT is incremented before the exception handler is invoked, the recovery routine will load an incorrect value of COUNT, causing the program to fail or behave unreliably.

| INCORRECT ERROR SYNCHRONIZATION | | |
|---------------------------------|-------|--|
| FILD | COUNT | ; NPX instruction |
| INC | COUNT | ; CPU instruction alters operand |
| FSQRT | COUNT | ; subsequent NPX instruction -- error from |
| | | ; previous NPX instruction detected here |
| PROPER ERROR SYNCHRONIZATION | | |
| FILD | COUNT | ; NPX instruction |
| FSQRT | | ; subsequent NPX instruction -- error from |
| | | ; previous NPX instruction detected here |
| INC | COUNT | ; CPU instruction alters operand |

Figure 2-12. Error Synchronization Examples

PROPER ERROR SYNCHRONIZATION

Error Synchronization relies on the WAIT instructions required by instruction and data synchronization and the BUSY and ERROR signals of the 80287. When an unmasked error occurs in the 80287, it asserts the ERROR signal, signalling to the CPU that a numeric error has occurred. The next time the CPU encounters an error-checking ESC or WAIT instruction, the CPU acknowledges the ERROR signal by trapping automatically to Interrupt #16, the Processor Extension Error vector. If the following ESC or WAIT instruction is properly placed, the CPU will not yet have disturbed any information vital to recovery from the error.

***System-Level
Numeric Programming***

3

CHAPTER 3

SYSTEM-LEVEL NUMERIC PROGRAMMING

System programming for iAPX 286/20 systems requires a more detailed understanding of the 80287 NPX than does application programming. Such things as emulation, initialization, exception handling, and data and error synchronization are all the responsibility of the systems programmer. These topics are covered in detail in the sections that follow.

iAPX 286/20 ARCHITECTURE

On a software level, the 80287 NPX appears as an extension of the 80286 CPU. On the hardware level, however, the mechanisms by which the 80286 and 80287 interact are a bit more complex. This section describes how the 80287 NPX and 80286 CPU interact and points out features of this interaction that are of interest to systems programmers.

Processor Extension Data Channel

All transfers of operands between the 80287 and system memory are performed by the 80286's internal Processor Extension Data Channel. This independent, DMA-like data channel permits all operand transfers of the 80287 to come under the supervision of the 80286 memory-management and protection mechanisms. The operation of this data channel is completely transparent to software.

Because the 80286 actually performs all transfers between the 80287 and memory, no additional bus drivers, controllers, or other components are necessary to interface the 80287 NPX to the local bus. Any memory accessible to the 80286 CPU is accessible by the 80287. The Processor Extension Data Channel is described in more detail in Chapter Six of the *iAPX 286 Hardware Reference Manual*.

Real-Address Mode and Protected Virtual-Address Mode

Like the 80286 CPU, the 80287 NPX can operate in both Real-Address mode and in Protected mode. Following a hardware RESET, the 80287 is initially activated in Real-Address mode. A single, privileged instruction (FSETPM) is necessary to set the 80287 into Protected mode.

As an extension to the 80286 CPU, the 80287 can access any memory location accessible by the task currently executing on the 80286. When operating in Protected mode, all memory references by the 80287 are automatically verified by the 80286's memory management and protection mechanisms as for any other memory references by the currently-executing task. Protection violations associated with NPX instructions automatically cause the 80286 to trap to an appropriate exception handler.

To the programmer, these two 80287 operating modes differ only in the manner in which the NPX instruction and data pointers are represented in memory following an FSAVE or FSTENV instruction. When the 80287 operates in Protected mode, its NPX instruction and data pointers are each represented in memory as a 16-bit segment selector and a 16-bit offset. When the 80287 operates in Real-Address mode, these same instruction and data pointers are represented simply as the 20-bit physical addresses of the operands in question (see figure 1-7 in Chapter One).

Dedicated and Reserved I/O Locations

The 80287 NPX does not require that any memory addresses be set aside for special purposes. The 80287 does make use of I/O port addresses in the range 00F8H through 00FFH, although these I/O operations are completely transparent to the iAPX 286 software. iAPX 286 programs must not reference these reserved I/O addresses directly.

To prevent any accidental misuse or other tampering with numeric instructions in the 80287, the 80286's I/O Privilege Level (IOPL) should be used in multiuser reprogrammable environments to restrict application program access to the I/O address space and so guarantee the integrity of 80287 computations. Chapter Eight of the *iAPX 286 Operating System Writer's Guide* contains more details regarding the use of the I/O Privilege Level.

PROCESSOR INITIALIZATION AND CONTROL

One of the principal responsibilities of systems software is the initialization, monitoring, and control of the hardware and software resources of the system, including the 80287 NPX. In this section, issues related to system initialization and control are described, including recognition of the NPX, emulation of the 80287 NPX in software if the hardware is not available, and the handling of exceptions that may occur during the execution of the 80287.

System Initialization

During initialization of an iAPX 286 system, systems software must

- Recognize the presence or absence of the NPX
- Set flags in the 80286 MSW to reflect the state of the numeric environment

If an 80287 NPX is present in the system, the NPX must be

- Initialized
- Switched into Protected mode (if desired)

All of these activities can be quickly and easily performed as part of the overall system initialization.

Recognizing the 80287 NPX

During initialization, the 80286 is easily programmed to recognize the presence of the 80287 NPX. Figure 3-1 shows an example of such a recognition routine.

In the example, the 80286 assumes that the 80287 is present and executes an FNINIT instruction. Following the FNINIT instruction, the 80286 attempts to read the NPX status word. If the 80287 NPX is present, the lower eight bits of this word (the exception flags) will be all zeros. If an 80287 is not present, these data lines will have been floating. The *iAPX 286 Hardware Reference Manual* describes how to design the 80287 socket to ensure that at least one of these lower eight data lines floats high in the absence of the 80287.

```

; initialization routine to detect an 80287 Numeric Processor

FND_287: FNINIT;           ; initialize Numeric Processor
        FSTSW  AX         ; retrieve 80287 status word
        OR    AL,AL       ; test low-byte--80287 exception flags
                                ; if all zero, then 80287 present and
                                ; properly initialized
                                ; if not all zero, then 80287 absent.
        JZ    GOT_287     ; branch if 80287 present

        SMSW  AX         ; No Numeric Processor--
        OR    04H        ; set EM bit in machine status word
        LMSW  AX         ; to enable software emulation of 80287
        JMP   CONTINUE

GOT_287: SMSW  AX         ; Numeric Processor present
        OR    02H        ; set MP bit in machine status word
        LMSW  AX         ; to permit normal 80287 operation

CONTINUE:                               ; and off we go ...

```

Figure 3-1. Software Routine to Recognize the 80287

Configuring the Numerics Environment

Once the 80286 CPU has determined the presence or absence of the 80287 NPX, the 80286 must set either the MP or the EM bit in its own machine status word accordingly. The initialization routine can either

- Set the MP bit in the 80286 MSW to allow numeric instructions to be executed directly by the 80287 NPX component
- Set the EM bit in the 80286 MSW to permit software emulation of the 80287 numeric instructions

The Math Present (MP) flag of the 80286 machine status word indicates to the CPU whether an 80287 NPX is physically available in the system. The MP flag controls the function of the WAIT instruction. When executing a WAIT instruction, the 80286 tests only the Task Switched (TS) bit if MP is set; if it finds TS set under these conditions, the CPU traps to exception #7.

The Emulation Mode (EM) bit of the 80286 machine status word indicates to the CPU whether NPX functions are to be emulated. If the CPU finds EM set when it executes an ESC instruction, program control is automatically trapped to exception #7, giving the exception handler the opportunity to emulate the functions of an 80287. The 80286 EM flag can be changed only by using the LMSW (load machine status word) instruction (legal only at privilege level 0) and examined with the aid of the SMSW (store machine status word) instruction (legal at any privilege level).

The EM bit also controls the function of the WAIT instruction. If the CPU finds EM set while executing a WAIT, the CPU does not check the ERROR pin for an error indication.

For correct 80286 operation, the EM bit must never be set concurrently with MP. The EM and MP bits of the 80286 are described in more detail in the *iAPX 286 Operating System Writer's Guide*. More information on software emulation for the 80287 NPX is described in the "80287 Emulation" section later in this chapter.

Initializing the 80287

Initializing the 80287 NPX simply means placing the NPX in a known state unaffected by any activity performed earlier. The example software routine to recognize the 80287 (table 3-1) performed this initialization using a single FNINIT instruction. This instruction causes the NPX to be initialized in the same way as that caused by the hardware RESET signal to the 80287. All the error masks are set, all registers are tagged empty, the ST is set to zero, and default rounding, precision, and infinity controls are set. Table 3-1 shows the state of the 80287 NPX following initialization.

Following a hardware RESET signal, such as after initial power-up, the 80287 is initialized in Real-Address mode. Once the 80287 has been switched to Protected mode (using the FSETPM instruction), only another hardware RESET can switch the 80287 back to Real-Address mode. The FNINIT instruction does not switch the operating state of the 80287.

80287 Emulation

If it is determined that no 80287 NPX is available in the system, systems software may decide to emulate ESC instructions in software. This emulation is easily supported by the 80286 hardware, because the 80286 can be configured to trap to a software emulation routine whenever it encounters an ESC instruction in its instruction stream.

As described previously, whenever the 80286 CPU encounters an ESC instruction, and its MP and EM status bits are set appropriately (MP=0, EM=1), the 80286 will automatically trap to interrupt #7, the Processor Extension Not Available exception. The return link stored on the stack points to the first byte of the ESC instruction, including the prefix byte(s), if any. The exception handler can use this return link to examine the ESC instruction and proceed to emulate the numeric instruction in software.

The emulator must step the return pointer so that, upon return from the exception handler, execution can resume at the first instruction following the ESC instruction.

Table 3-1. NPX Processor State Following Initialization

| Field | Value | Interpretation |
|-----------------------|--------|-----------------------|
| Control Word | | |
| Infinity Control | 0 | Projective |
| Rounding Control | 00 | Round to nearest |
| Precision Control | 11 | 64 bits |
| Interrupt-Enable Mask | 1 | Interrupts disabled |
| Exception Masks | 111111 | All exceptions masked |
| Status Word | | |
| Busy | 0 | Not busy |
| Condition Code | ???? | (Indeterminate) |
| Stack Top | 000 | Empty stack |
| Interrupt Request | 0 | No interrupt |
| Exception Flags | 000000 | No exceptions |
| Tag Word | | |
| Tags | 11 | Empty |
| Registers | N.C. | Not changed |
| Exception Pointers | | |
| Instruction Code | N.C. | Not changed |
| Instruction Address | N.C. | Not changed |
| Operand Address | N.C. | Not changed |

To an application program, execution on an iAPX 286/10 system with 80287 emulation is almost indistinguishable from execution on an iAPX 286/20 system, except for the difference in execution speeds.

There are several important considerations when using emulation on an iAPX 286/10 system:

- When operating in Protected-Address mode, numeric applications using the emulator must be executed in execute-readable code segments. Numeric software cannot be emulated if it is executed in execute-only code segments. This is because the emulator must be able to examine the particular numeric instruction that caused the Emulation trap.
- Only privileged tasks can place the 80286 in emulation mode. The instructions necessary to place the 80286 in Emulation mode are privileged instructions, and are not typically accessible to an application.

An emulator package (E80287) that runs on iAPX 286/10 systems is available from Intel in the *8086 Software Toolbox*, Order Number 122203. This emulation package operates in both Real and Protected mode, providing a complete functional equivalent for the 80287 emulated in software.

When using the E80287 emulator, writers of numeric exception handlers should be aware of one slight difference between the emulated 80287 and the 80287 hardware:

- On the 80287 hardware, exception handlers are invoked by the 80286 at the first WAIT or ESC instruction following the instruction causing the exception. The return link, stored on the 80286 stack, points to this second WAIT or ESC instruction where execution will resume following a return from the exception handler.
- Using the E80287 emulator, numeric exception handlers are invoked from within the emulator itself. The return link stored on the stack when the exception handler is invoked will therefore point back to the E80287 emulator, rather than to the program code actually being executed (emulated). An IRET return from the exception handler returns to the emulator, which then returns immediately to the emulated program. This added layer of indirection should not cause confusion, however, because the instruction causing the exception can always be identified from the 80287's instruction and data pointers.

Handling Numeric Processing Exceptions

Once the iAPX 286/20 system has been initialized and normal execution of applications has been commenced, the 80287 NPX may occasionally require attention in order to recover from numeric processing errors. This section provides details for writing software exception handlers for numeric exceptions. Numeric processing exceptions have already been introduced in previous sections of this manual.

As discussed previously, the 80287 NPX can take one of two actions when it recognizes a numeric exception:

- If the exception is masked, the NPX will automatically perform its own masked exception response, correcting the exception condition according to fixed rules, and then continuing with its instruction execution.
- If the exception is unmasked, the NPX signals the exception to the 80286 CPU using the ERROR status line between the two processors. Each time the 80286 encounters an ESC or WAIT instruction in its instruction stream, the CPU checks the condition of this ERROR status line. If ERROR is active, the CPU automatically traps to Interrupt vector #16, the Processor Extension Error trap.

Interrupt vector #16 typically points to a software exception handler, which may or may not be a part of systems software. This exception handler takes the form of an iAPX 286 interrupt procedure.

When handling numeric errors, the CPU has two responsibilities:

- The CPU must not disturb the numeric context when an error is detected.
- The CPU must clear the error and attempt recovery from the error.

Although the manner in which programmers may treat these responsibilities varies from one implementation to the next, most exception handlers will include these basic steps:

- Store the NPX environment (control, status, and tag words, operand and instruction pointers) as it existed at the time of the exception.
- Clear the exception bits in the status word.
- Enable interrupts on the CPU.
- Identify the exception by examining the status and control words in the save environment.
- Take some system-dependent action to rectify the exception.
- Return to the interrupted program and resume normal execution.

It should be noted that the NPX exception pointers contained in the stored NPX environment will take different forms, depending on whether the NPX is operating in Real-Address mode or in Protected mode. The earlier discussion of Real versus Protected mode details how this information is presented in each of the two operating modes.

Simultaneous Exception Response

In cases where multiple exceptions arise simultaneously, the 80287 signals one exception according to the precedence sequence shown in table 3-2. This means, for example, that zero divided by zero will result in an invalid operation, and not a zero divide exception.

Exception Recovery Examples

Recovery routines for NPX exceptions can take a variety of forms. They can change the arithmetic and programming rules of the NPX. These changes may redefine the default fix-up for an error, change the appearance of the NPX to the programmer, or change how arithmetic is defined on the NPX.

A change to an error response might be to automatically normalize all denormals loaded from memory. A change in appearance might be extending the register stack into memory to provide an “infinite” number of numeric registers. The arithmetic of the NPX can be changed to automatically extend the

Table 3-2. Precedence of NPX Exceptions

| | |
|-----------------|--|
| Signaled First: | Denormalized operand (if unmasked) Invalid operation Zero divide |
| Signaled Last: | Denormalized (if masked) Over/Underflow Precision |

precision and range of variables when exceeded. All these functions can be implemented on the NPX via numeric errors and associated recovery routines in a manner transparent to the application programmer.

Some other possible system-dependent actions, mentioned previously, may include:


- Incrementing an exception counter for later display or printing
- Printing or displaying diagnostic information (e.g., the 80287 environment and registers)
- Aborting further execution
- Storing a diagnostic value (a NaN) in the result and continuing with the computation

Notice that an exception may or may not constitute an error, depending on the implementation. Once the exception handler corrects the error condition causing the exception, the floating-point instruction that caused the exception can be restarted, if appropriate. This cannot be accomplished using the IRET instruction, however, because the trap occurs at the ESC or WAIT instruction following the offending ESC instruction. The exception handler must obtain from the NPX the address of the offending instruction in the task that initiated it, make a copy of it, execute the copy in the context of the offending task, and then return via IRET to the current CPU instruction stream.

In order to correct the condition causing the numeric exception, exception handlers must recognize the precise state of the NPX at the time the exception handler was invoked, and be able to reconstruct the state of the NPX when the exception initially occurred. To reconstruct the state of the NPX, programmers must understand when, during the execution of an NPX instruction, exceptions are actually recognized.

Invalid operation, zero divide, and denormalized exceptions are detected before an operation begins, whereas overflow, underflow, and precision exceptions are not raised until a true result has been computed. When a *before* exception is detected, the NPX register stack and memory have not yet been updated, and appear as if the offending instructions has not been executed.

When an *after* exception is detected, the register stack and memory appear as if the instruction has run to completion; i.e., they may be updated. (However, in a store or store-and-pop operation, unmasked over/underflow is handled like a before exception; memory is not updated and the stack is not popped.) The programming examples contained in Chapter Four include an outline of several exception handlers to process numeric exceptions for the 80287.

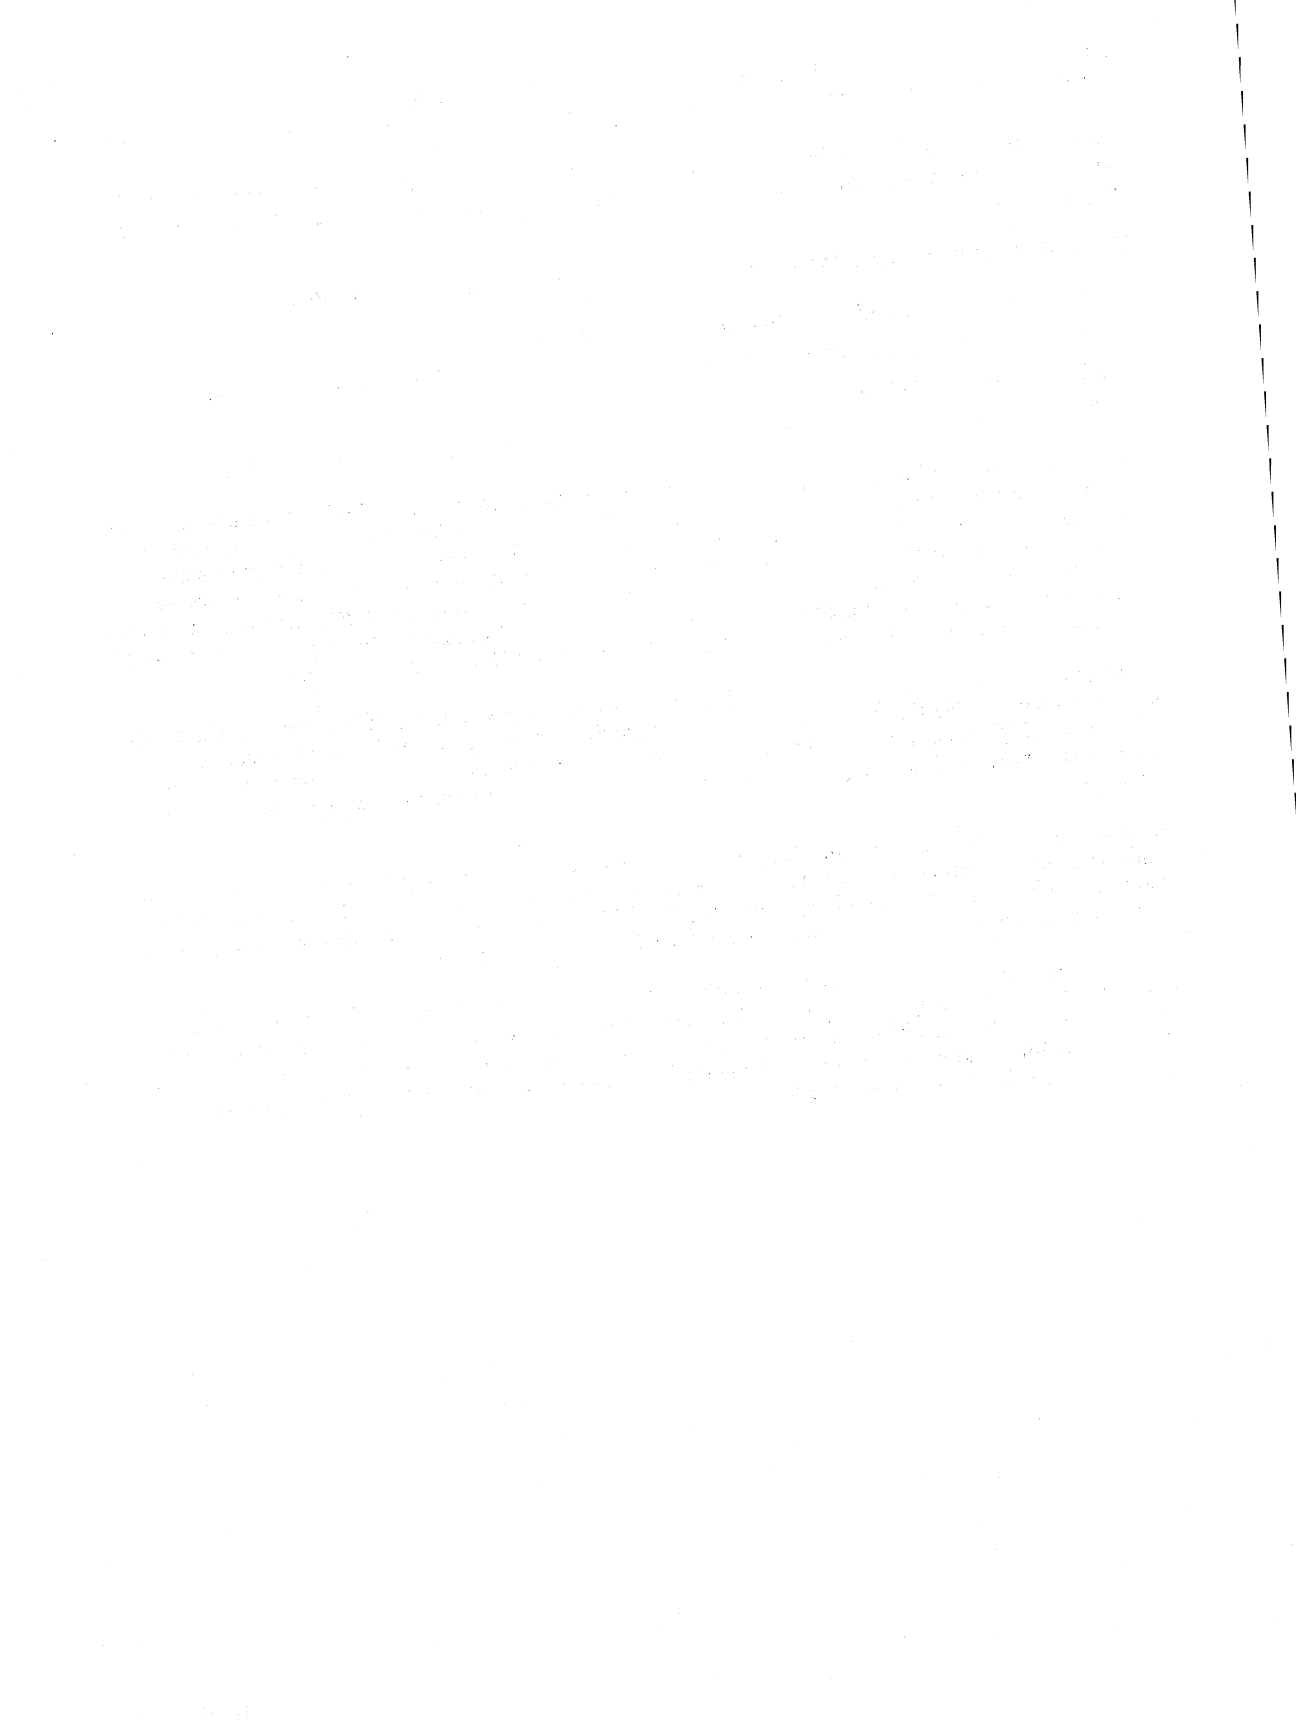

*Numeric
Programming Examples*

4

CHAPTER 4

NUMERIC PROGRAMMING EXAMPLES

The following sections contain examples of numeric programs for the 80287 NPX written in ASM286. These examples are intended to illustrate some of the techniques for programming the iAPX 286/20 computing system for numeric applications.

CONDITIONAL BRANCHING EXAMPLES

As discussed in Chapter Two, several numeric instructions post their results to the condition code bits of the 80287 status word. Although there are many ways to implement conditional branching following a comparison, the basic approach is as follows:

- Execute the comparison.
- Store the status word. (80287 allows storing status directly into AX register.)
- Inspect the condition code bits.
- Jump on the result.

Figure 4-1 is a code fragment that illustrates how two memory-resident long real numbers might be compared (similar code could be used with the FTST instruction). The numbers are called A and B, and the comparison is A to B.

The comparison itself requires loading A onto the top of the 80287 register stack and then comparing it to B, while popping the stack with the same instruction. The status word is then written into the 80286 AX register.

A and B have four possible orderings, and bits C3, C2, and C0 of the condition code indicate which ordering holds. These bits are positioned in the upper byte of the NPX status word so as to correspond to the CPU's zero, parity, and carry flags (ZF, PF, and CF), when the byte is written into the flags. The code fragment sets ZF, PF, and CF of the CPU status word to the values of C3, C2, and C0 of the NPX status word, and then uses the CPU conditional jump instructions to test the flags. The resulting code is extremely compact, requiring only seven instructions.

The FXAM instruction updates all four condition code bits. Figure 4-2 shows how a jump table can be used to determine the characteristics of the value examined. The jump table (FXAM_TBL) is initialized to contain the 16-bit displacement of 16 labels, one for each possible condition code setting. Note that four of the table entries contain the same value, because four condition code settings correspond to "empty."

The program fragment performs the FXAM and stores the status word. It then manipulates the condition code bits to finally produce a number in register BX that equals the condition code times 2. This involves zeroing the unused bits in the byte that contains the code, shifting C3 to the right so that it is adjacent to C2, and then shifting the code to multiply it by 2. The resulting value is used as an index that selects one of the displacements from FXAM_TBL (the multiplication of the condition code is required because of the 2-byte length of each value in FXAM_TBL). The unconditional JMP instruction effectively vectors through the jump table to the labelled routine that contains code (not shown in the example) to process each possible result of the FXAM instruction.

```

      .
      .
      .
A      DQ      ?
B      DQ      ?
      .
      .
      .
      FLD      A          ; LOAD A ONTO TOP OF 287 STACK
      FCOMP   B          ; COMPARE A:B, POP A
      FSTSW  AX          ; STORE RESULT TO CPU AX REGISTER
      ;
      ; CPU AX REGISTER CONTAINS CONDITION CODES (RESULTS OF
      ; COMPARE)
      ; LOAD CONDITION CODES INTO CPU FLAGS
      SAHF
      ;
      ; USE CONDITIONAL JUMPS TO DETERMINE ORDERING OF A TO
      ; B
      ;
      JP      A_B_UNORDERED ; TEST C2 (PF)
      JB      A_LESS        ; TEST C0 (CF)
      JE      A_EQUAL       ; TEST C3 (ZF)
A_GREATER: ; C0 (CF) = 0, C3 (ZF) = 0
      .
      .
A_EQUAL:  ; C0 (CF) = 0, C3 (ZF) = 1
      .
      .
A_LESS:   ; C0 (CF) = 1, C3 (ZF) = 0
      .
      .
A_B_UNORDERED: ; C2 (PF) = 1
      .
      .

```

Figure 4-1. Conditional Branching for Compares

```

      ; JUMP TABLE FOR EXAMINE ROUTINE
      ;
FXAM_TBL DW POS_UNNORM, POS_NAN, NEG_UNNORM, NEG_NAN,
&        POS_NORM, POS_INFINITY, NEG_NORM,
&        NEG_INFINITY, POS_ZERO, EMPTY, NEG_ZERO,
&        EMPTY, POS_DENORM, EMPTY, NEG_DENORM, EMPTY
      .
      .
      ; EXAMINE ST AND STORE RESULT (CONDITION CODES)
      FXAM
      FSTSW AX

```

Figure 4-2. Conditional Branching for FXAM

```

;
;   CALCULATE OFFSET INTO JUMP TABLE
MOV     BH,0      ; CLEAR UPPER HALF OF BX,
MOV     BL,AH    ; LOAD CONDITION CODE INTO BL
AND     BL,00000111B ; CLEAR ALL BITS EXCEPT C2-C0
AND     AH,01000000B ; CLEAR ALL BITS EXCEPT C3
SHR     AH,2     ; SHIFT C3 TWO PLACES RIGHT
SAL     BX,1     ; SHIFT C2-C0 1 PLACE LEFT (MULTIPLY
                 ; BY 2)
OR      BL,AH    ; DROP C3 BACK IN ADJACENT TO C2
                 ; (000XXXX0)
;
;   JUMP TO THE ROUTINE 'ADDRESSED' BY CONDITION CODE
JMP     FXAM_TBL[BX]
;
;   HERE ARE THE JUMP TARGETS, ONE TO HANDLE
;   EACH POSSIBLE RESULT OF FXAM
POS_UNNORM:
POS_NAN:
NEG_UNNORM:
NEG_NAN:
POS_NORM:
POS_INFINITY:
NEG_NORM:
NEG_INFINITY:
POS_ZERO:
EMPTY:
NEG_ZERO:
POS_DENORM:
NEG_DENORM:

```

Figure 4-2. Conditional Branching for FXAM (Cont'd.)

EXCEPTION HANDLING EXAMPLES

There are many approaches to writing exception handlers. One useful technique is to consider the exception handler procedure as consisting of “prologue,” “body,” and “epilogue” sections of code. (For compatibility with the 80287 emulators, this procedure should be invoked by interrupt pointer (vector) number 16.)

At the beginning of the prologue, CPU interrupts have been disabled. The prologue performs all functions that must be protected from possible interruption by higher-priority sources. Typically, this will involve saving CPU registers and transferring diagnostic information from the 80287 to memory. When the critical processing has been completed, the prologue may enable CPU interrupts to allow higher-priority interrupt handlers to preempt the exception handler.

The exception handler body examines the diagnostic information and makes a response that is necessarily application-dependent. This response may range from halting execution, to displaying a message, to attempting to repair the problem and proceed with normal execution.

The epilogue essentially reverses the actions of the prologue, restoring the CPU and the NPX so that normal execution can be resumed. The epilogue must *not* load an unmasked exception flag into the 80287 or another exception will be requested immediately.

Figure 4-3 through 4-5 show the ASM286 coding of three skeleton exception handlers. They show how prologues and epilogues can be written for various situations, but provide comments indicating only where the application-dependent exception handling body should be placed.

Figure 4-3 and 4-4 are very similar; their only substantial difference is their choice of instructions to save and restore the 80287. The tradeoff here is between the increased diagnostic information provided by FNSAVE and the faster execution of FNSTENV. For applications that are sensitive to interrupt latency or that do not need to examine register contents, FNSTENV reduces the duration of the "critical region," during which the CPU will not recognize another interrupt request (unless it is a nonmaskable interrupt).

After the exception handler body, the epilogues prepare the CPU and the NPX to resume execution from the point of interruption (i.e., the instruction following the one that generated the unmasked exception). Notice that the exception flags in the memory image that is loaded into the 80287 are cleared to zero prior to reloading (in fact, in these examples, the entire status word image is cleared).

The examples in figures 4-3 and 4-4 assume that the exception handler itself will not cause an unmasked exception. Where this is a possibility, the general approach shown in figure 4-5 can be employed. The basic technique is to save the full 80287 state and then to load a new control word in the prologue. Note that considerable care should be taken when designing an exception handler of this type to prevent the handler from being reentered endlessly.

```
SAVE_ALL          PROC
;
; SAVE CPU REGISTERS, ALLOCATE STACK SPACE
; FOR 80287 STATE IMAGE
    PUSH         BP
    MOV          BP, SP
    SUB          SP, 94
; SAVE FULL 80287 STATE, WAIT FOR COMPLETION,
; ENABLE CPU INTERRUPTS
    FNSAVE      [BP-94]
    FWAIT
    STI
;
; APPLICATION-DEPENDENT EXCEPTION HANDLING
; CODE GOES HERE
```

Figure 4-3. Full-State Exception Handler

```

;
; CLEAR EXCEPTION FLAGS IN STATUS WORD
; RESTORE MODIFIED STATE
; IMAGE
  MOV     BYTE PTR [BP-92], 0H
  FRSTOR [BP-94]
; DE-ALLOCATE STACK SPACE, RESTORE CPU REGISTERS
  MOV     SP, BP
  .
  .
  POP     BP
;
; RETURN TO INTERRUPTED CALCULATION
  IRET
SAVE_ALL      ENDP

```

Figure 4-3. Full-State Exception Handler (Cont'd.)

```

SAVE_ENVIRONMENT PROC
;
; SAVE CPU REGISTERS, ALLOCATE STACK SPACE
; FOR 80287 ENVIRONMENT
  PUSH    BP
  .
  .
  MOV     BP, SP
  SUB     SP, 14
; SAVE ENVIRONMENT, WAIT FOR COMPLETION,
; ENABLE CPU INTERRUPTS
  FNSTENV [BP-14]
  FWAIT
  STI
;
; APPLICATION EXCEPTION-HANDLING CODE GOES HERE
;
; CLEAR EXCEPTION FLAGS IN STATUS WORD
; RESTORE MODIFIED
; ENVIRONMENT IMAGE
  MOV     BYTE PTR [BP-12], 0H
  FLDENV [BP-14]
; DE-ALLOCATE STACK SPACE, RESTORE CPU REGISTERS
  MOV     SP, BP
  POP     BP
;
; RETURN TO INTERRUPTED CALCULATION
  IRET
SAVE_ENVIRONMENT ENDP

```

Figure 4-4. Reduced-Latency Exception Handler

```

      .
      .
      LOCAL_CONTROL DW ? ; ASSUME INITIALIZED
      .
      .
REENTRANT PROC
;
; SAVE CPU REGISTERS, ALLOCATE STACK SPACE FOR
; 80287 STATE IMAGE
      PUSH     BP
      .
      .
      MOV     BP,SP
      SUB     SP,94
; SAVE STATE, LOAD NEW CONTROL WORD,
; FOR COMPLETION, ENABLE CPU INTERRUPTS
      FNSAVE [BP-94]
      FLDCW  LOCAL_CONTROL
      STI
      .
      .
; APPLICATION EXCEPTION HANDLING CODE GOES HERE.
; AN UNMASKED EXCEPTION GENERATED HERE WILL
; CAUSE THE EXCEPTION HANDLER TO BE REENTERED.
; IF LOCAL STORAGE IS NEEDED, IT MUST BE
; ALLOCATED ON THE CPU STACK.
      .
      .
; CLEAR EXCEPTION FLAGS IN STATUS WORD
; RESTORE MODIFIED STATE IMAGE
      MOV     BYTE PTR [BP-92], 0H
      FRSTOR [BP-94]
; DE-ALLOCATE STACK SPACE, RESTORE CPU REGISTERS
      MOV     SP,BP
      .
      .
      POP     BP
; RETURN TO POINT OF INTERRUPTION
      IRET
REENTRANT ENDP
```

Figure 4-5. Reentrant Exception Handler

FLOATING-POINT TO ASCII CONVERSION EXAMPLES

Numeric programs must typically format their results at some point for presentation and inspection by the program user. In many cases, numeric results are formatted as ASCII strings for printing or display. This example shows how floating-point values can be converted to decimal ASCII character strings. The function shown in figure 4-6 can be invoked from PL/M-286, Pascal-286, FORTRAN-286, or ASM286 routines.

Shortness, speed, and accuracy were chosen rather than providing the maximum number of significant digits possible. An attempt is made to keep integers in their own domain to avoid unnecessary conversion errors.

Using the extended precision real number format, this routine achieves a worst case accuracy of three units in the 16th decimal position for a noninteger value or integers greater than 10^{18} . This is double precision accuracy. With values having decimal exponents less than 100 in magnitude, the accuracy is one unit in the 17th decimal position.

Higher precision can be achieved with greater care in programming, larger program size, and lower performance.

```

iAPX286 MACRO ASSEMBLER      80287 Floating-Point to 18-Digit ASCII Conversion      10:12:38 09/25/83 PAGE 1

SERIES-111 iAPX286 MACRO ASSEMBLER X10B ASSEMBLY OF MODULE FLOATING_TO_ASCII
OBJECT MODULE PLACED IN :F3:FPASC.OBJ
ASSEMBLER INVOKED BY: ASM286.B6 :F3:FPASC.AP2

LOC OBJ          LINE    SOURCE
1 +1 $title("80287 Floating-Point to 18-Digit ASCII Conversion")
2
3             name    floating_to_ascii
4
5             public  floating_to_ascii
6             extrn   get_power_10:near,tos_status:near
7
8             ;
9             ;      This subroutine will convert the floating point number in the
10            ;      top of the 80287 stack to an ASCII string and separate power of 10
11            ;      scaling value (in binary).  The maximum width of the ASCII string
12            ;      formed is controlled by a parameter which must be > 1.  Unnormal values,
13            ;      denormal values, and psuedo zeroes will be correctly converted.
14            ;      A returned value will indicate how many binary bits of
15            ;      precision were lost in an unnormal or denormal value.  The magnitude
16            ;      (in terms of binary power) of a psuedo zero will also be indicated.
17            ;      Integers less than 10**18 in magnitude are accurately converted if the
18            ;      destination ASCII string field is wide enough to hold all the
19            ;      digits.  Otherwise the value is converted to scientific notation.
20            ;
21            ;      The status of the conversion is identified by the return value,
22            ;      it can be:
23            ;
24            ;      0      conversion complete, string_size is defined
25            ;      1      invalid arguments
26            ;      2      exact integer conversion, string_size is defined
27            ;      3      indefinite
28            ;      4      + NAN (Not A Number)
29            ;      5      - NAN
30            ;      6      + Infinity
31            ;      7      - Infinity
32            ;      8      psuedo zero found, string_size is defined
33            ;
34            ;      The PLM/286 calling convention is:
35            ;
36            ;      floating_to_ascii:
37            ;      procedure (number,denormal_ptr,string_ptr,size_ptr,field_size,
38            ;      power_ptr) word external;
39            ;      declare (denormal_ptr,string_ptr,power_ptr,size_ptr) pointer;
40            ;      declare field_size word, string_size based size_ptr word;
41            ;      declare number real;
42            ;      declare denormal integer based denormal_ptr;
43            ;      declare power integer based power_ptr;
44            ;      end floating_to_ascii;
45            ;
46            ;      The floating point value is expected to be on the top of the NPX
47            ;      stack.  This subroutine expects 3 free entries on the NPX stack and
48            ;      will pop the passed value off when done.  The generated ASCII string
49            ;      will have a leading character either '-' or '+' indicating the sign
50            ;      of the value.  The ASCII decimal digits will immediately follow.
51            ;      The numeric value of the ASCII string is (ASCII STRING.)*10**POWER.

```

Figure 4-6. Floating-Point to ASCII Conversion Routine

```

iAPX286 MACRO_ASSEMBLER      80287 Floating-Point to 18-Digit ASCII Conversion      10:12:38 09/25/83 PAGE 2

LOC  OBJ          LINE    SOURCE
51      ;          ;          ; If the given number was zero, the ASCII string will contain a sign
52      ;          ;          ; and a single zero character. The value string_size indicates the total
53      ;          ;          ; length of the ASCII string including the sign character. String(0) will
54      ;          ;          ; always hold the sign. It is possible for string_size to be less than
55      ;          ;          ; field_size. This occurs for zeroes or integer values. A pseudo zero
56      ;          ;          ; will return a special return code. The denormal count will indicate
57      ;          ;          ; the power of two originally associated with the value. The power of
58      ;          ;          ; ten and ASCII string will be as if the value was an ordinary zero.
59      ;          ;          ;
60      ;          ;          ; This subroutine is accurate up to a maximum of 18 decimal digits for
61      ;          ;          ; integers. Integer values will have a decimal power of zero associated
62      ;          ;          ; with them. For non integers, the result will be accurate to within 2
63      ;          ;          ; decimal digits of the 16th decimal place (double precision). The
64      ;          ;          ; exponentiate instruction is also used for scaling the value into the
65      ;          ;          ; range acceptable for the BCD data type. The rounding mode in effect
66      ;          ;          ; on entry to the subroutine is used for the conversion.
67      ;          ;          ;
68      ;          ;          ; The following registers are not transparent:
69      ;          ;          ;
70      ;          ;          ; ax bx cx dx si di flags
71      ;          ;          ;
72 +1   $reject
73      ;          ;
74      ;          ; Define the stack layout.
75      ;          ;
0000F3 76      bp_save      equ      word ptr [bp]
0002F3 77      es_save      equ      bp_save + size bp_save
0004F3 78      return_ptr   equ      es_save + size es_save
0006F3 79      power_ptr    equ      return_ptr + size return_ptr
0008F3 80      field_size   equ      power_ptr + size power_ptr
000AF3 81      size_ptr     equ      field_size + size field_size
000CF3 82      string_ptr  equ      size_ptr + size size_ptr
000EF3 83      denormal_ptr equ      string_ptr + size string_ptr
84      ;          ;
000A   85      perms_size  equ      size power_ptr + size field_size + size size_ptr +
86      &          size string_ptr + size denormal_ptr
87      ;          ;
88      ;          ; Define constants used
89      ;          ;
0012   90      BCD_DIGITS  equ      18          ; Number of digits in bcd_value
0002   91      WORD_SIZE   equ      2
000A   92      BCD_SIZE    equ      10
0001   93      MINUS      equ      1          ; Define return values
0004   94      NAN         equ      4          ; The exact values chosen here are
0006   95      INFINITY    equ      6          ; important. They must correspond to
0003   96      INDEFINITE equ      3          ; the possible return values and be in
0008   97      PSEUDO_ZERO equ      8          ; the same numeric order as tested by
-0002  98      INVALID    equ      -2         ; the program.
-0004  99      ZERO        equ      -4
-0006 100     DENORMAL   equ      -6
-0008 101     UNNORMAL   equ      -8
0000 102     NORMAL     equ      0
0002 103     EXACT      equ      2
104      ;          ;
105      ;          ; Define layout of temporary storage area.
106      ;          ;
-0002F3 107     status      equ      word ptr [bp-WORD_SIZE]
-0004F3 108     power_two   equ      status - WORD_SIZE
-0006F3 109     power_ten   equ      power_two - WORD_SIZE
-0010F3 110     bcd_value  equ      tbyte ptr power_ten - BCD_SIZE
-0010F3 111     bcd_byte   equ      byte ptr bcd_value
-0010F3 112     fraction   equ      bcd_value
113      ;          ;
114     local_size  equ      size status + size power_two + size power_ten
115     &          + size bcd_value
0010   116
----   117     stack      stackseg [local_size+6] ; Allocate stack space for locals
----   118 +1   $reject
119      ;          ; segment er public
120      ;          ; extrn power_table:qword
121      ;          ;
122      ;          ; Constants used by this function.
123      ;          ;
124     even      ; Optimize for 16 bits
125     const10   dw      10          ; Adjustment value for too big BCD
126      ;          ;
127      ;          ; Convert the C3,C2,C1,C0 encoding from tos_status into meaningful bit
128      ;          ; flags and values.
129      ;          ;
0002 FB 130     status_table db      UNNORMAL, NAN, UNNORMAL + MINUS, NAN + MINUS.
0003 04
0004 F9
0005 05
0006 00 131     &          NORMAL, INFINITY, NORMAL + MINUS, INFINITY + MINUS.
0007 04
0008 01
0009 07
000A FC 132     &          ZERO, INVALID, ZERO + MINUS, INVALID.
000B FE
000C FD
000D FE
000E FA 133     &          DENORMAL, INVALID, DENORMAL + MINUS, INVALID.
000F FE
0010 FB
0011 FE

```

Figure 4-6. Floating-Point to ASCII Conversion Routine (Cont'd.)

```

IAPX286 MACRO ASSEMBLER      80287 Floating-Point to 18-Digit ASCII Conversion      10:12:38 09/25/83 PAGE 3

LDC OBJ          LINE      SOURCE
0012             134
0012             135 floating_to_ascii proc
0012             136
0012 EB0000      E         137 call tos_status      ; Look at status of ST(0)
0015 8BDB        138 mov bx,ax           ; Get descriptor from table
0017 2E9AB70200 R        139 mov al,status_table[bx]
001c 3CFE        140 cmp al,INVALID     ; Look for empty ST(0)
001E 752B        141 jne not_empty
0012             142 ;
0012             143 ; ST(0) is empty! Return the status value.
0012             144 ;
0020 C20A00      145 ret parms_size
0012             146 ;
0012             147 ; Remove infinity from stack and exit.
0012             148 ;
0023             149 found_infinity:
0023 DDBB        150
0023 DDBB        151 fstp st(0)         ; OK to leave fstp running
0025 EB02        152 jmp short exit_proc
0012             153 ;
0012             154 ; String space is too small! Return invalid code.
0012             155 ;
0027             156 small_string:
0027 B0FE        157
0027 B0FE        158 mov al,INVALID
0029             159
0029             160 exit_proc:
0029             161
0029 C9          162 leave             ; Restore stack
002A 07          163 pop es
002B C20A00      164 ret parms_size
0012             165 ;
0012             166 ; ST(0) is NAN or indefinite. Store the value in memory and look
0012             167 ; at the fraction field to separate indefinite from an ordinary NAN.
0012             168 ;
002E             169 NAN_or_indefinite:
002E             170
002E DB7EFO      171 fstp fraction     ; Remove value from stack for examination
0031 AB01        172 test al,MINUS     ; Look at sign bit
0033 9B          173 fwait            ; Insure store is done
0034 74F3        174 jz exit_proc     ; Can't be indefinite if positive
0012             175 ;
0036 B800C0      176 mov bx,0C000H     ; Match against upper 16 bits of fraction
0039 2B5EF6      177 sub bx,word ptr fraction+6 ; Compare bits 63-48
003C 0B5EF4      178 or bx,word ptr fraction+4 ; Bits 32-47 must be zero
003F 0B5EF2      179 or bx,word ptr fraction+2 ; Bits 31-16 must be zero
0042 0B5EF0      180 or bx,word ptr fraction ; Bits 15-0 must be zero
0045 75E2        181 jnz exit_proc
0012             182 ;
0047 B003        183 mov al,INDEFINITE ; Set return value for indefinite value
0049 EBDE        184 jmp exit_proc
0012             185 ;
0012             186 ; Allocate stack space for local variables and establish parameter
0012             187 ; addressibility.
0012             188 ;
004B             189 not_empty:
004B             190
004B 06          191 push es           ; Save working register
004C CB100000    192 enter local_size,0 ; Format stack
0012             193 ;
0050 8B4E08      194 mov cx,field_size ; Check for enough string space
0053 83F902      195 cmp cx,2
0056 7CCF        196 jl small_string
0012             197 ;
0058 49          198 dec cx           ; Adjust for sign character
0059 83F912      199 cmp cx,BCD_DIGITS ; See if string is too large for BCD
005C 7603        200 jbe size_ok
0012             201 ;
005E B91200      202 mov cx,BCD_DIGITS ; Else set maximum string size
0012             203 ;
0061             204 size_ok:
0061             205
0061 3C06        206 cmp al,INFINITY   ; Look for infinity
0063 7DBE        207 jge found_infinity ; Return status value for + or - inf.
0012             208 ;
0065 3C04        209 cmp al,NAN        ; Look for NAN or INDEFINITE
0067 7DC5        210 jge NAN_or_indefinite
0012             211 ;
0012             212 ; Set default return values and check that the number is normalized.
0012             213 ;
0069 D9E1        214 fabs             ; Use positive value only
0012             215 ; sign bit in al has true sign of value
006B 8BDD        216 mov dx,ax        ; Save return value for later
006D 33C0        217 xor ax,ax        ; Form 0 constant
006F 8B7E0E      218 mov di,denormal_ptr ; Zero denormal count
0072 8905        219 mov word ptr [di],ax
0074 8B5E06      220 mov bx,power_ptr ; Zero power of ten value
0077 8907        221 mov word ptr [bx],ax
0079 80FAFC      222 cmp dl,ZERO      ; Test for zero
007C 732B        223 jae real_zero    ; Skip power code if value is zero
0012             224 ;
007E 80FAFA      225 cmp dl,DENORMAL  ; Look for a denormal value
0081 732C        226 jae found_denormal ; Handle it specially
0012             227 ;

```

Figure 4-6. Floating-Point to ASCII Conversion Routine (Cont'd.)

```

iAPX286 MACRO ASSEMBLER      80287 Floating-Point to 18-Digit ASCII Conversion      10:12:38 09/25/83 PAGE 4

LOC OBJ      LINE      SOURCE
00B3 D9F4      228      fextract                                ; Separate exponent from significand
00B5 80FAFB    229      cmp     di,UNNORMAL                      ; Test for unnormal value
00B8 7240      230      jb     normal_value
00BA 80EAFB    231      ;
00BA 80EAFB    232      sub     di,UNNORMAL-NORMAL              ; Return normal status with correct sign
00BA 80EAFB    233      ;
00BA 80EAFB    234      ; Normalize the fraction, adjust the power of two in ST(1) and set
00BA 80EAFB    235      ; the denormal count value.
00BA 80EAFB    236      ;
00BA 80EAFB    237      ; Assert: 0 <= ST(0) < 1.0
00BA 80EAFB    238      ;
00BD D9EB      239      fldl                                ; Load constant to normalize fraction
00BF          240      normalize_fraction:
00BF          241      ;
00BF DCC1      242      ;
00BF DCC1      243      fadd  st(1),st                          ; Set integer bit in fraction
0091 DEE9      244      fsub                                ; Form normalized fraction in ST(0)
0093 D9F4      245      fextract                                ; Power of two field will be negative
0095 D9C9      246      ; of denormal count
0097 DF15      247      fxch                                ; Put denormal count in ST(0)
0099 DEC2      248      fist  word ptr [di]                    ; Put negative of denormal count in memory
0099 DEC2      249      faddp st(2),st                          ; Form correct power of two in st(1)
0099 F71D      250      ; OK to use word ptr [di] now
009D 752B      251      neg  word ptr [di]                      ; Form positive denormal count
009D 752B      252      jnz  not_pseudo_zero
009D 752B      253      ;
009D 752B      254      ; A pseudo zero will appear as an unnormal number. When attempting
009D 752B      255      ; to normalize it, the resultant fraction field will be zero. Performing
009D 752B      256      ; an fextract on zero will yield a zero exponent value.
009D 752B      257      ;
009F D9C9      258      fxch                                ; Put power of two value in st(0)
00A1 DF1D      259      fistp word ptr [di]                    ; Set denormal count to power of two value
00A1 DF1D      260      ; Word ptr [di] is not used by convert
00A1 DF1D      261      ; integer, OK to leave running
00A3 80EAFB    262      sub     di,NORMAL-PSUEDO_ZERO           ; Set return value saving the sign bit
00A6 E9A400    263      jmp     convert_integer                 ; Put zero value into memory
00A6 E9A400    264      ;
00A6 E9A400    265      ; The number is a real zero, set the return value and setup for
00A6 E9A400    266      ; conversion to BCD.
00A6 E9A400    267      ;
00A9          268      real_zero:
00A9          269      ;
00A9 80EAFB    270      sub     di,ZERO-NORMAL                  ; Convert status to normal value
00AC E99E00    271      jmp     convert_integer                 ; Treat the zero as an integer
00AC E99E00    272      ;
00AC E99E00    273      ; The number is a denormal. FEXTRACT will not work correctly in this
00AC E99E00    274      ; case. To correctly separate the exponent and fraction, add a fixed
00AC E99E00    275      ; constant to the exponent to guarantee the result is not a denormal.
00AC E99E00    276      ;
00AF          277      found_denormal:
00AF          278      ;
00AF          279      fldl                                ; Prepare to bump exponent
00AF          280      fxch                                ;
00B1 D9C9      281      fprem                                ; Force denormal to smallest representable
00B3 D9F8      282      ; extended real format exponent
00B5 D9F4      283      fextract                                ; This will work correctly now
00B5 D9F4      284      ;
00B5 D9F4      285      ; The power of the original denormal value has been safely isolated.
00B5 D9F4      286      ; Check if the fraction value is an unnormal.
00B5 D9F4      287      ;
00B7 D9E5      288      fcom  ax                                ; See if the fraction is an unnormal
00B9 9BDFE0    289      fstsw ax                                ; Save 80287 status in CPU AX reg for later
00BC D9C9      290      fxch                                ; Put exponent in ST(0)
00BE D9CA      291      fxch  st(2)                            ; Put 1.0 into ST(0), exponent in ST(2)
00C0 80EAFB    292      sub     di,DENORMAL-NORMAL             ; Return normal status with correct sign
00C3 A90A44    293      test  ax,4400H                          ; See if C3=C2=0 implying unnormal or NAN
00C6 74C7      294      jz     normalize_fraction              ; Jump if fraction is an unnormal
00C6 74C7      295      ;
00C8 DDB8      296      fstp  st(0)                            ; Remove unnecessary 1.0 from st(0)
00C8 DDB8      297      ;
00C8 DDB8      298      ; Calculate the decimal magnitude associated with this number to
00C8 DDB8      299      ; within one order. This error will always be inevitable due to
00C8 DDB8      300      ; rounding and lost precision. As a result, we will deliberately fail
00C8 DDB8      301      ; to consider the LOG10 of the fraction value in calculating the order.
00C8 DDB8      302      ; Since the fraction will always be 1 <= F < 2, its LOG10 will not change
00C8 DDB8      303      ; the basic accuracy of the function. To get the decimal order of magnitude,
00C8 DDB8      304      ; simply multiply the power of two by LOG10(2) and truncate the result to
00C8 DDB8      305      ; an integer.
00C8 DDB8      306      ;
00CA          307      normal_value:
00CA          308      not_pseudo_zero:
00CA          309      ;
00CA DB7EFO    310      fstp  fraction                          ; Save the fraction field for later use
00CD DF56FC    311      fist  power_two                          ; Save power of two
00D0 D9EC      312      fidig2                                ; Get LOG10(2)
00D2 DEC9      313      ; Power_two is now safe to use
00D4 DF5EFA    314      fmul  ; Form LOG10(of exponent of number)
00D4 DF5EFA    315      fistp power_ten                          ; Any rounding mode will work here
00D4 DF5EFA    316      ;
00D4 DF5EFA    317      ; Check if the magnitude of the number rules out treating it as
00D4 DF5EFA    318      ; an integer.
00D4 DF5EFA    319      ;
00D4 DF5EFA    320      ; CX has the maximum number of decimal digits allowed.
00D4 DF5EFA    321      ;

```

Figure 4-6. Floating-Point to ASCII Conversion Routine (Cont'd.)

```

iAPX286 MACRO ASSEMBLER      80287 Floating-Point to 18-Digit ASCII Conversion      10:12:38 09/25/83 PAGE 5

LOC  OBJ                LINE    SOURCE
00D7 9B                322      fwait                    ; Wait for power_ten to be valid
00DB B846FA            323      mov     ax,power_ten     ; Get power of ten of value
00DB 2BC1              324      sub     ax,cx            ; Form scaling factor necessary in ax
00DD 7722              325      ja     adjust_result     ; Jump if number will not fit
326                    ;
327                    ;       The number is between 1 and 10**(field_size).
328                    ;       Test if it is an integer
00DF DF46FC            330      fld     power_two        ; Restore original number
00E2 BBF2              331      mov     si,dx            ; Save return value
00E4 B0EAFE            332      sub     dl,NORMAL-EXACT  ; Convert to exact return value
00E7 DB6EFO            333      fld     fraction         ;
00EA D9FD              334      fscale                    ; Form full value, this is safe here
00EC DDD1              335      fst     st(1)           ; Copy value for compare
00EE D9FC              336      frndint                  ; Test if its an integer
00FO DBD9              337      fcomp                    ; Compare values
00F2 9BDD7EFE          338      fstsw  status           ; Save status
00F6 F746E0040         339      test   status,4000H     ; C3=1 implies it was an integer
00FB 7550              340      jnz    convert_integer  ;
341                    ;
00FD DDD8              342      fstp  st(0)            ; Remove non integer value
00FF 8BD6              343      mov     dx,si           ; Restore original return value
344                    ;
345                    ;       Scale the number to within the range allowed by the BCD format.
346                    ;       The scaling operation should produce a number within one decimal order
347                    ;       of magnitude of the largest decimal number representable within the
348                    ;       given string width.
349                    ;
350                    ;       The scaling power of ten value is in ax.
351                    ;
0101                    352      adjust_result:
0101 8907                354      mov     word ptr [bx],ax ; Set initial power of ten return value
0103 F7DB                355      neg     ax              ; Subtract one for each order of
356                    ;       magnitude the value is scaled by
0105 E80000            E 357      call   get_power_10     ; Scaling factor is returned as exponent
358                    ;       and fraction
0108 DB6EFO            359      fld     fraction         ; Get fraction
0108 DEC9              360      fmul                    ; Combine fractions
0109 B8F1              361      mov     si,cx           ; Form power of ten of the maximum
010F D1E6              362      shl     si,1            ; BCD value to fit in the string
0111 D1E6              363      shl     si,1            ; Index in si
0113 D1E6              364      shl     si,1            ;
0115 DF46FC            365      fld     power_two        ; Combine powers of two
0118 DEC2              366      faddp  st(2),st        ;
011A D9FD              367      fscale                    ; Form full value, exponent was safe
011C DDD9              368      fstp  st(1)            ; Remove exponent
369                    ;
370                    ;       Test the adjusted value against a table of exact powers of ten.
371                    ;       The combined errors of the magnitude estimate and power function can
372                    ;       result in a value one order of magnitude too small or too large to fit
373                    ;       correctly in the BCD field. To handle this problem, pretest the
374                    ;       adjusted value, if it is too small or large, then adjust it by ten and
375                    ;       adjust the power of ten value.
376                    ;
011E                    377      test_power:
011E 2EDC940B00         E 378      fcom   power_table[si]+type power_table; Compare against exact power
379                    ;       entry. Use the next entry since cx
380                    ;       has been decremented by one
0123 9BDFE0            382      fstsw  ax              ; No wait is necessary
0126 A90041            383      test   ax,4100H        ; If C3 = CO = 0 then too big
0129 750C              384      jnz    test_for_small  ;
385                    ;
012B 2EDE360000        R 386      fidiv  const10         ; Else adjust value
0130 80E2FD            387      and     dl,not EXACT    ; Remove exact flag
0133 FF07              388      inc     word ptr [bx]   ; Adjust power of ten value
0135 EB14              389      jmp     short in_range  ; Convert the value to a BCD integer
390                    ;
0137                    391      test_for_small:
392                    ;
0137 2EDC940000         E 393      fcom   power_table[si] ; Test relative size
013C 9BDFE0            394      fstsw  ax              ; No wait is necessary
013F A90001            395      test   ax,100H         ; If CO = 0 then st(0) >= lower bound
0142 7407              396      jz     in_range        ; Convert the value to a BCD integer
397                    ;
0144 2EDE0E0000        R 398      fimul  const10         ; Adjust value into range
0149 FF0F              399      dec     word ptr [bx]   ; Adjust power of ten value
400                    ;
014B                    401      in_range:
402                    ;
014B D9FC              403      frndint                  ; Form integer value
404                    ;
405                    ;       Assert: 0 <= TDS <= 999,999,999,999,999,999
406                    ;       The TDS number will be exactly representable in 18 digit BCD format.
407                    ;
014D                    408      convert_integer:
409                    ;
014D DF76FO            410      fbstp  bcd_value       ; Store as BCD format number
411                    ;
412                    ;       While the store BCD runs, setup registers for the conversion to
413                    ;       ASCII.
414                    ;
0150 BE0800            415      mov     si,BCD_SIZE-2  ; Initial BCD index value

```

Figure 4-6. Floating-Point to ASCII Conversion Routine (Cont'd.)


```

.IAPX286 MACRO ASSEMBLER      80287 Floating-Point to 18-Digit ASCII Conversion      10:12:38 09/25/83 PAGE 6

LOC OBJ                LINE    SOURCE
0153 B9040F           416      mov     cx,0f04h      ; Set shift count and mask
0156 BB0100           417      mov     bx,1          ; Set initial size of ASCII field for sign
0159 BB7E0C           418      mov     di,string_ptr ; Get address of start of ASCII string
015C 8CDB             419      mov     ax,ds         ; Copy ds to es
015E 8E00             420      mov     es,ax
0160 FC              421      cld
0161 B02B             422      mov     al,'+'        ; Set autoincrement mode
0163 F6C201           423      test    di,MINUS     ; Clear sign field
0166 7402             424      jz     positive_result ; Look for negative value
                                425
0168 B02D             426      mov     al,'-'        ;
                                427
016A                 428      positive_result:
                                429
016A AA              430      stosb                    ; Bump string pointer past sign
016B 80E2FE           431      and     di,not MINUS   ; Turn off sign bit
016E 9B              432      fwait                    ; Wait for fbstp to finish
                                433
                                434      ;
                                435      ; Register usage:
                                436      ; ah: BCD byte value in use
                                437      ; al: ASCII character value
                                438      ; dx: Return value
                                439      ; ch: BCD mask = 0fh
                                440      ; cl: BCD shift count = 4
                                441      ; bx: ASCII string field width
                                442      ; si: BCD field index
                                443      ; di: ASCII string field pointer
                                444      ; ds,es: ASCII string segment base
                                445
                                446      ; Remove leading zeroes from the number.
016F                 447      skip_leading_zeros:
                                448
016F BA62F0           449      mov     ah,bcd_byte[si] ; Get BCD byte
0172 8AC4             450      mov     al,ah          ; Copy value
0174 D2EB             451      shr     al,cl          ; Get high order digit
0176 22C5             452      and     al,ch          ; Set zero flag
0178 7516             453      jnz     enter_odd     ; Exit loop if leading non zero found
                                454
017A 8AC4             455      mov     al,ah          ; Get BCD byte again
017C 22C5             456      and     al,ch          ; Get low order digit
017E 7518             457      jnz     enter_even    ; Exit loop if non zero digit found
                                458
0180 4E              459      dec     si             ; Decrement BCD index
0181 79EC             460      jns     skip_leading_zeros
                                461
                                462      ; The significand was all zeroes.
0183 B030             463      mov     al,'0'        ; Set initial zero
0185 AA              464      stosb                    ;
0186 43              465      inc     bx             ; Bump string length
0187 EB16             466      jmp     short exit_with_value
                                467
                                468      ;
                                469      ; Now expand the BCD string into digit per byte values 0-9
                                470
0189                 471      digit_loop:
                                472
0189 BA62F0           473      mov     ah,bcd_byte[si] ; Get BCD byte
018C 8AC4             474      mov     al,ah          ; Copy value
018E D2EB             475      shr     al,cl          ; Get high order digit
                                476
0190                 477      enter_odd:
                                478
0190 0430             479      add     al,'0'        ; Convert to ASCII
0192 AA              480      stosb                    ; Put digit into ASCII string area
0193 8AC4             481      mov     al,ah          ; Copy value
0195 22C5             482      and     al,ch          ; Get low order digit
0197 43              483      inc     bx             ; Bump field size counter
                                484
0198                 485      enter_even:
                                486
0198 0430             487      add     al,'0'        ; Convert to ASCII
019A AA              488      stosb                    ; Put digit into ASCII area
019B 43              489      inc     bx             ; Bump field size counter
019C 4E              490      dec     si             ; Go to next BCD byte
019D 79EA             491      jns     digit_loop
                                492
                                493      ; Conversion complete. Set the string size and remainder.
                                494
019F                 495      exit_with_value:
                                496
019F 8B7E0A           497      mov     di,size_ptr
01A2 891D             498      mov     word ptr [di],bx
01A4 8BC2             499      mov     ax,ds         ; Set return value
01A6 E980FE           500      jmp     exit_proc
                                501
-----              502      floating_to_ascii     endp
                                503      code                 ends
                                504
ASSEMBLY COMPLETE. NO WARNINGS. NO ERRORS

```

Figure 4-6. Floating-Point to ASCII Conversion Routine (Cont'd.)

```

iAPX286 MACRO ASSEMBLER      Calculate the value of 10**ax                12:11:08 09/25/83 PAGE 1
LOC  OBJ                      LINE   SOURCE
1 +1 $title("Calculate the value of 10**ax")
2 ;
3 ;      This subroutine will calculate the value of 10**ax.
4 ;      For values of 0 <= ax < 19, the result will exact.
5 ;      All 80286 registers are transparent and the value is returned on
6 ;      the TOS as two numbers, exponent in ST(1) and fraction in ST(0).
7 ;      The exponent value can be larger than the largest exponent of an
8 ;      extended real format number. Three stack entries are used.
9 ;
10 ;      name      get_power_10
11 ;
12 ;      public   get_power_10, power_table
13 ;
---- 14      stack      stackseg B
---- 15 ;
16 ;      code      segment or public
17 ;
18 ;      Use exact values from 1.0 to 1e18.
19 ;
20 ;      even
21 power_table dq      1.0, 1e1, 1e2, 1e3 ; Optimize 16 bit access
3F
0008 000000000000024
40
0010 000000000000059
40
0018 000000000040BF
40
0020 00000000008BCC
40
0028 00000000006AFB
40
0030 0000000080842E
41
0038 00000000D01263
41
0040 0000000084D797
41
0048 0000000065CDD
41
0050 000000205FA002
42
0058 000000E8764837
42
0060 000000A2941A6D
42
0068 000040E59C30A2
42
0070 0000901EC4BCD6
42
0078 00003426F56B0C
43
0080 0080E03779C341
43
0088 00A0D885573476
43
0090 00C84E676DC1A8
43
0098 26      get_power_10      proc
27
28
009B 3D1200      29      cmp      ax, 18 ; Test for 0 <= ax < 19
009B 770F      30      ja      out_of_range
31
009D 53      32      push     bx ; Get working index register
009E 8BDB      33      mov      bx, ax ; Form table index
00A0 C1E303      34      shl     bx, 3
00A3 2EDDB70000  R 35      fld     power_table[bx] ; Get exact value
00A8 5B      36      pop      bx ; Restore register value
00A9 D9F4      37      fextract ; Separate power and fraction
00AB C3      38      ret ; OK to leave fextract running
39
40 ;
41 ;      Calculate the value using the exponentiate instruction.
42 ;      The following relations are used:
43 ;      10**x = 2**(log2(10)*x)
44 ;      2**(I+F) = 2**I * 2**F
45 ;      if st(1) = I and st(0) = 2**F then fscale produces 2**(I+F)
46
00AC 46      out_of_range:
47
00AC D9E9      48      fld12t ; TDS = LOG2(10)
00AE C8040000  49      enter  4, 0 ; Format stack
00B2 8946FE      50      mov     [bp-2], ax ; Save power of 10 value
00B5 DE4EFE      51      fmul  word ptr [bp-2] ; TDS: X = LOG2(10)*F = LOG2(10**F)
00B8 98D97EFC  52      fstcw  word ptr [bp-4] ; Get current control word
00BC 8B46FC      53      mov     ax, word ptr [bp-4] ; Get control word, no wait necessary
00BF 25FFF3      54      and     ax, not 0C00H ; Mask off current rounding field
00C2 0D0004      55      or      ax, 0400H ; Set round to negative infinity
00C5 8746FC      56      xchg   ax, word ptr [bp-4] ; Put new control word in memory
57 ; ; old control word is in ax
00CB D9EB      58      fld1 ; Set TDS = -1.0
00CA D9E0      59      fchs ;
00CC D9C1      60      fld     st(1) ; Copy power value in base two
00CE D9EFC      61      fldcw  word ptr [bp-4] ; Set new control word value

```

Figure 4-6. Floating-Point to ASCII Conversion Routine (Cont'd.)

```

iAPX286 MACRO ASSEMBLER      Calculate the value of 10**ax                12:11:08 09/25/83 PAGE 2

LOC  OBJ                LINE    SOURCE
00D1 D9FC                62      frndint                    ; TDS = I: -inf < I <= X, I is an integer
00D3 B946FC              63      mov     word ptr [bp-4],ax   ; Restore original rounding control
00D6 D96EFC              64      fldcw  word ptr [bp-4]
00D9 D97CA                65      fxch   st(2)                ; TDS = X, ST(1) = -1.0, ST(2) = I
00DB D8E2                 66      fsub  st,st(2)              ; TDS,F = X-1: 0 <= TDS < 1.0
00DD BB46FE              67      mov     ax,[bp-2]           ; Restore power of ten
00E0 D97FD              68      fscale ax,[bp-2]           ; TDS = F/2: 0 <= TDS < 0.5
00E2 D9F0              69      f2xm1                    ; TDS = 2**(F/2) - 1.0
00E4 C9                 70      leave                       ; Restore stack
00E5 DEE1              71      fsubr                       ; Form 2**(F/2)
00E7 DCCB              72      fmul  st,st(0)             ; Form 2**F
00E9 C3                 73      ret                         ; OK to leave fmul running
                                74
                                75      get_power_10  endp
-----
                                76
                                77      code                      ends
                                78      end

ASSEMBLY COMPLETE.      NO WARNINGS,      NO ERRORS

```

```

iAPX286 MACRO ASSEMBLER      Determine TOS register contents          12:12:13 09/25/83 PAGE 1

SERIES-III iAPX286 MACRO ASSEMBLER X108 ASSEMBLY OF MODULE TOS_STATUS
OBJECT MODULE PLACED IN :F3:TOSST.DBJ
ASSEMBLER INVOKED BY:  ASM286.B6 :F3:TOSST.AP2

LOC  OBJ                LINE    SOURCE
                                1 +1  *title("Determine TOS register contents")
                                2 ;
                                3 ;
                                4 ;       This subroutine will return a value from 0-15 in AX corresponding
                                5 ;       to the contents of B02B7 TOS. All registers are transparent and no
                                6 ;       errors are possible. The return value corresponds to c3,c2,c1,c0
                                7 ;       of FXAM instruction.
                                8 ;
                                9       name     tos_status
                               10      public  tos_status
-----
                               11
                               12      stack      stackseg 6      ; Allocate space on the stack
-----
                               13
                               14      code       segment er public
                               15
0000                               16      tos_status  proc
                               17
0000 D9E5                18      fxam                    ; Get register contents status
0002 9BDFE0              19      fstsw  ax                 ; Get status
0005 BAC4                20      mov     al,ah             ; Put bit 10-8 into bits 2-0
0007 250740             21      and    ax,4007h          ; Mask out bits c3,c2,c1,c0
000A C0C03              22      shr    ah,3              ; Put bit c3 into bit 11
000B 0AC4                23      or     al,ah             ; Put c3 into bit 3
000F B400                24      mov     ah,0              ; Clear return value
0011 C3                 25      ret
                                26
                                27      tos_status  endp
-----
                                28
                                29      code       ends
                                30      end

ASSEMBLY COMPLETE.      NO WARNINGS,      NO ERRORS

```

Figure 4-6. Floating-Point to ASCII Conversion Routine (Cont'd.)

Function Partitioning

Three separate modules implement the conversion. Most of the work of the conversion is done in the module `FLOATING_TO_ASCII`. The other modules are provided separately, because they have a more general use. One of them, `GET_POWER_10`, is also used by the ASCII to floating-point conversion routine. The other small module, `TOS_STATUS`, will identify what, if anything, is in the top of the numeric register stack.

Exception Considerations

Care is taken inside the function to avoid generating exceptions. Any possible numeric value will be accepted. The only exceptions possible would occur if insufficient space exists on the numeric register stack.

The value passed in the numeric stack is checked for existence, type (NaN or infinity), and status (unnormal, denormal, zero, sign). The string size is tested for a minimum and maximum value. If the top of the register stack is empty, or the string size is too small, the function will return with an error code.

Overflow and underflow is avoided inside the function for very large or very small numbers.

Special Instructions

The functions demonstrate the operation of several numeric instructions, different data types, and precision control. Shown are instructions for automatic conversion to BCD, calculating the value of 10 raised to an integer value, establishing and maintaining concurrency, data synchronization, and use of directed rounding on the NPX.

Without the extended precision data type and built-in exponential function, the double precision accuracy of this function could not be attained with the size and speed of the shown example.

The function relies on the numeric BCD data type for conversion from binary floating-point to decimal. It is not difficult to unpack the BCD digits into separate ASCII decimal digits. The major work involves scaling the floating-point value to the comparatively limited range of BCD values. To print a 9-digit result requires accurately scaling the given value to an integer between 10^8 and 10^9 . For example, the number $+0.123456789$ requires a scaling factor of 10^9 to produce the value $+123456789.0$, which can be stored in 9 BCD digits. The scale factor must be an exact power of 10 to avoid to changing any of the printed digit values.

These routines should exactly convert all values exactly representable in decimal in the field size given. Integer values that fit in the given string size will not be scaled, but directly stored into the BCD form. Noninteger values exactly representable in decimal within the string size limits will also be exactly converted. For example, 0.125 is exactly representable in binary or decimal. To convert this floating-point value to decimal, the scaling factor will be 1000, resulting in 125. When scaling a value, the function must keep track of where the decimal point lies in the final decimal value.

Description of Operation

Converting a floating-point number to decimal ASCII takes three major steps: identifying the magnitude of the number, scaling it for the BCD data type, and converting the BCD data type to a decimal ASCII string.

Identifying the magnitude of the result requires finding the value X such that the number is represented by $I*10^X$, where $1.0 \leq I < 10.0$. Scaling the number requires multiplying it by a scaling factor 10^S , so that the result is an integer requiring no more decimal digits than provided for in the ASCII string.

Once scaled, the numeric rounding modes and BCD conversion put the number in a form easy to convert to decimal ASCII by host software.

Implementing each of these three steps requires attention to detail. To begin with, not all floating-point values have a numeric meaning. Values such as infinity, indefinite, or Not a Number (NaN) may be encountered by the conversion routine. The conversion routine should recognize these values and identify them uniquely.

Special cases of numeric values also exist. Denormals, unnormals, and pseudo zero all have a numeric value but should be recognized, because all of them indicate that precision was lost during some earlier calculations.

Once it has been determined that the number has a numeric value, and it is normalized setting appropriate unnormal flags, the value must be scaled to the BCD range.

Scaling the Value

To scale the number, its magnitude must be determined. It is sufficient to calculate the magnitude to an accuracy of 1 unit, or within a factor of 10 of the given value. After scaling the number, a check will be made to see if the result falls in the range expected. If not, the result can be adjusted one decimal order of magnitude up or down. The adjustment test after the scaling is necessary due to inevitable inaccuracies in the scaling value.

Because the magnitude estimate need only be close, a fast technique is used. The magnitude is estimated by multiplying the power of 2, the unbiased floating-point exponent, associated with the number by $\log_{10}2$. Rounding the result to an integer will produce an estimate of sufficient accuracy. Ignoring the fraction value can introduce a maximum error of 0.32 in the result.

Using the magnitude of the value and size of the number string, the scaling factor can be calculated. Calculating the scaling factor is the most inaccurate operation of the conversion process. The relation $10^x = 2^{*(X*\log_2 10)}$ is used for this function. The exponentiate instruction (F2XM1) will be used.

Due to restrictions on the range of values allowed by the F2XM1 instruction, the power of 2 value will be split into integer and fraction components. The relation $2^{*(I + F)} = 2^{*I} * 2^{*F}$ allows using the FSCALE instruction to recombine the 2^{*F} value, calculated through F2XM1, and the 2^{*I} part.

INACCURACY IN SCALING

The inaccuracy of these operations arises because of the trailing zeros placed into the fraction value when stripping off the integer valued bits. For each integer valued bit in the power of 2 value separated from the fraction bits, one bit of precision is lost in the fraction field due to the zero fill occurring in the least significant bits.

Up to 14 bits may be lost in the fraction because the largest allowed floating point exponent value is $2^{14} - 1$.

AVOIDING UNDERFLOW AND OVERFLOW

The fraction and exponent fields of the number are separated to avoid underflow and overflow in calculating the scaling values. For example, to scale 10^{-4932} to 10^8 requires a scaling factor of 10^{4950} , which cannot be represented by the NPX.

By separating the exponent and fraction, the scaling operation involves adding the exponents separate from multiplying the fractions. The exponent arithmetic will involve small integers, all easily represented by the NPX.

FINAL ADJUSTMENTS

It is possible that the power function (Get_Power_10) could produce a scaling value such that it forms a scaled result larger than the ASCII field could allow. For example, scaling $9.9999999999999999 \times 10^{4900}$ by $1.00000000000000010 \times 10^{-4883}$ would produce $1.0000000000000009 \times 10^{18}$. The scale factor is within the accuracy of the NPX and the result is within the conversion accuracy, but it cannot be represented in BCD format. This is why there is a post-scaling test on the magnitude of the result. The result can be multiplied or divided by 10, depending on whether the result was too small or too large, respectively.

Output Format

For maximum flexibility in output formats, the position of the decimal point is indicated by a binary integer called the power value. If the power value is zero, then the decimal point is assumed to be at the right of the rightmost digit. Power values greater than zero indicate how many trailing zeros are not shown. For each unit below zero, move the decimal point to the left in the string.

The last step of the conversion is storing the result in BCD and indicating where the decimal point lies. The BCD string is then unpacked into ASCII decimal characters. The ASCII sign is set corresponding to the sign of the original value.

TRIGONOMETRIC CALCULATION EXAMPLES

The 80287 instruction set does not provide a complete set of trigonometric functions that can be used directly in calculations. Rather, the basic building blocks for implementing trigonometric functions are provided by the FPTAN and FPREM instructions. The example in figure 4-7 shows how three trigonometric functions (sine, cosine, and tangent) can be implementing using the 80287. All three functions accept a valid angle argument between -2^{62} and $+2^{62}$. These functions may be called from PL/M-286, Pascal-286, FORTRAN-286, or ASM286 routines.

These trigonometric functions use the partial tangent instruction together with trigonometric identities to calculate the result. They are accurate to within 16 units of the low 4 bits of an extended precision value. The functions are coded for speed and small size, with tradeoffs available for greater accuracy.

FPTAN and FPREM

These trigonometric functions use the FPTAN instruction of the NPX. FPTAN requires that the angle argument be between 0 and $\pi/4$ radians, 0 to 45 degrees. The FPREM instruction is used to reduce the argument down to this range. The low three quotient bits set by FPREM identify which octant the original angle was in.

One FPREM instruction iteration can reduce angles of 10^{18} radians or less in magnitude to $\pi/4$! Larger values can be reduced, but the meaning of the result is questionable, because any errors in the least significant bits of that value represent changes of 45 degrees or more in the reduced angle.

Cosine Uses Sine Code

To save code space, the cosine function uses most of the sine function code. The relation $\sin(|A| + \pi/2) = \cos(A)$ is used to convert the cosine argument into a sine argument. Adding $\pi/2$ to the angle is performed by adding 010_2 to the FPREM quotient bits identifying the argument's octant.

It would be very inaccurate to add $\pi/2$ to the cosine argument if it was very much different from $\pi/2$.

Depending on which octant the argument falls in, a different relation will be used in the sine and tangent functions. The program listings show which relations are used.

For the tangent function, the ratio produced by FPTAN will be directly evaluated. The sine function will use either a sine or cosine relation depending on which octant the angle fell into. On exit, these functions will normally leave a divide instruction in progress to maintain concurrency.

If the input angles are of a restricted range, such as from 0 to 45 degrees, then considerable optimization is possible since full angle reduction and octant identification is not necessary.

All three functions begin by looking at the value given to them. Not a Number (NaN), infinity, or empty registers must be specially treated. Unnormals need to be converted to normal values before the FPTAN instruction will work correctly. Denormals will be converted to very small unnormals that do work correctly for the FPTAN instruction. The sign of the angle is saved to control the sign of the result.

Within the functions, close attention was paid to maintain concurrent execution of the 80287 and host. The concurrent execution will effectively hide the execution time of the decision logic used in the program.

```

iAPX286 MACRO ASSEMBLER      80287 Trigonometric Functions                10:13:51 09/25/83 PAGE 1

SERIES-III iAPX286 MACRO ASSEMBLER X108 ASSEMBLY OF MODULE TRIG_FUNCTIONS
OBJECT MODULE PLACED IN :F3:TRIG.OBJ
ASSEMBLER INVOKED BY: ASM286.86 :F3:TRIG.AP2

LOC OBJ          LINE      SOURCE
1 +1  #title("80287 Trigonometric Functions")
2
3          name      trig_functions
4          public   sine, cosine, tangent
5
6          stack    stackseg      6          ; Reserve local space
7
8          #        sw_287        record  res1:1, cond3:1, top:3, cond2:1, cond1:1, cond0:1,
9          &         &          res2:8
10
11         code      segment er public
12         ;
13         ;         Define local constants.
14         ;
15         even
16         pi_quarter dt      3FFEC90FDAA2216BC235R ; PI/4
17         C9FE3F
18         00A0 0000COFF
19         indefinite dd      0FFC00000R          ; Indefinite special value
20 +1  #eject

```

Figure 4-7. Calculating Trigonometric Functions

```

iAPX286 MACRO ASSEMBLER      B0287 Trigonometric Functions      10:13:51 09/25/83 PAGE 2

LOC OBJ          LINE      SOURCE
19              ;
20              ;      This subroutine calculates the sine or cosine of the angle, given in
21              ;      radians. The angle is in ST(0), the returned value will be in ST(0).
22              ;      The result is accurate to within 7 units of the least significant three
23              ;      bits of the NPX extended real format. The PLM/B6 definition is:
24              ;
25              ;      sine: procedure (angle) real external;
26              ;      declare angle real;
27              ;      end sine;
28              ;
29              ;      cosine: procedure (angle) real external;
30              ;      declare angle real;
31              ;      end cosine;
32              ;
33              ;      Three stack registers are required. The result of the function is
34              ;      defined as follows for the following arguments:
35              ;
36              ;              angle                      result
37              ;
38              ;      valid or unnormal less than 2**62 in magnitude  correct value
39              ;      zero                                           0 or 1
40              ;      denormal                                         correct denormal
41              ;      valid or unnormal greater than 2**62          indefinite
42              ;      infinity                                         indefinite
43              ;      NAN                                             NAN
44              ;      empty                                           empty
45 +1 $eject
46              ;
47              ;      This function is based on the NPX fptan instruction. The fptan
48              ;      instruction will only work with an angle of from 0 to PI/4. With this
49              ;      instruction, the sine or cosine of angles from 0 to PI/4 can be accurately
50              ;      calculated. The technique used by this routine can calculate a general
51              ;      sine or cosine by using one of four possible operations:
52              ;
53              ;              Let R = iangle mod PI/4;
54              ;              S = -1 or 1, according to the sign of the angle
55              ;
56              ;      1) sin(R)      2) cos(R)      3) sin(PI/4-R)  4) cos(PI/4-R)
57              ;
58              ;      The choice of the relation and the sign of the result follows the
59              ;      decision table shown below based on the octant the angle falls in:
60              ;
61              ;              octant      sine      cosine
62              ;
63              ;              0          S*1      2
64              ;              1          S*4      3
65              ;              2          S*2     -1*1
66              ;              3          S*3     -1*4
67              ;              4          -S*1     -1*2
68              ;              5          -S*4     -1*3
69              ;              6          -S*2      1
70              ;              7          -S*3      4
71              ;
72 +1 $eject
73              ;
74              ;      Angle to sine function is a zero or unnormal.
75              ;
000E          76      sine_zero_unnormal:
77              ;
000E DDD9      78          fstp   st(1)          ; Remove PI/4
0010 7501      79          jnz   enter_sine_normalize ; Jump if angle is unnormal
80              ;
81              ;      Angle is a zero.
82              ;
0012 C3       83          ret
84              ;
85              ;      Angle is an unnormal.
86              ;
0013          87      enter_sine_normalize:
88              ;
0013 E80901    89          call  normalize_value
0016 EB2F      90          jmp   short enter_sine
91              ;
0018          92      cosine proc          ; Entry point to cosine
93              ;
0018 D9E5      94          fxam          ; Look at the value
001A 9BDFE0    95          fstsw   ax      ; Store status value
001D 2EDB2E000 R 96          fld   pi_quarter ; Setup for angle reduce
0022 B101     97          mov   cl,1      ; Signal cosine function
0024 9E       98          sahf          ; ZF = C3, PF = C2, CF = C0
0029 7263     99          jc   funny_parameter ; Jump if parameter is
100              ;      empty, NAN, or infinity
101              ;
102              ;      Angle is unnormal, normal, zero, denormal.
103              ;
0027 D9C9     104         frch          ; st(0) = angle, st(1) = PI/4
0029 7A1C     105         jpe   enter_sine   ; Jump if normal or denormal
106              ;
107              ;      Angle is an unnormal or zero.
108              ;
002B DDD9     109         fstp   st(1)          ; Remove PI/4
002D 75E4     110         jnz   enter_sine_normalize
111              ;
112              ;      Angle is a zero. cos(0) = 1.0

```

Figure 4-7. Calculating Trigonometric Functions (Cont'd.)


```

iAPX286 MACRO ASSEMBLER      80287 Trigonometric Functions      10:13:51 09/25/83 PAGE 3

LOC OBJ          LINE      SOURCE

002F DDD8        113          ;
0031 D9E8        114          ; fstp st(0) ; Remove 0
0033 C3          115          ; fild ; Return 1
0033 C3          116          ; ret
0033 C3          117          ;
0033 C3          118          ; All work is done as a sine function. By adding PI/2 to the angle
0033 C3          119          ; a cosine is converted to a sine. Of course the angle addition is not
0033 C3          120          ; done to the argument but rather to the program logic control values.
0033 C3          121          ;
0034             122 sine: ; Entry point for sine function
0034             123          ;
0034 D9E5        124          ; fxam ; Look at the parameter
0036 9BDFE0      125          ; fstsw ax ; Look at fxam status
0039 2EDB2E0000  R 126          ; fld pi_quarter ; Get PI/4 value
003E 9E          127          ; sahf ; CF = C0, PF = C2, ZF = C3
003F 7249        128          ; jc funny_parameter ; Jump if empty, NAN, or infinity
003F 7249        129          ;
003F 7249        130          ; Angle is unnormal, normal, zero, or denormal.
003F 7249        131          ;
0041 D9C9        132          ; frch ; ST(1) = PI/4, st(0) angle
0043 B100        133          ; mov cl,0 ; Signal sine
0045 7BC7        134          ; jpe sine_zero_unnormal ; Jump if zero or unnormal
0045 7BC7        135          ;
0045 7BC7        136          ; ST(0) is either a normal or denormal value. Both will work.
0045 7BC7        137          ; Use the fprem instruction to accurately reduce the range of the given
0045 7BC7        138          ; angle to within 0 and PI/4 in magnitude. If fprem cannot reduce the
0045 7BC7        139          ; angle in one shot, the angle is too big to be meaningful, > 2**62
0045 7BC7        140          ; radians. Any roundoff error in the calculation of the angle given
0045 7BC7        141          ; could completely change the result of this function. It is safest to
0045 7BC7        142          ; call this very rare case an error.
0045 7BC7        143          ;
0047             144 enter_sine:
0047 D9FB        145          ; fprem ; Reduce angle
0047 D9FB        146          ; ; Note that fprem will force a
0047 D9FB        147          ; denormal to a very small unnormal
0047 D9FB        148          ; ; Fptan of a very small unnormal
0047 D9FB        149          ; will be the same very small
0047 D9FB        150          ; unnormal, which is correct.
0049 93          151          ; xchg ax,bx ; Save old status in BX
004A 9BDFE0      152          ; fstsw ax ; Check if reduction was complete
004A 9BDFE0      153          ; ; Quotient in CO,C3,C1
004D 93          154          ; xchg ax,bx ; Put new status in bx
004E F6C704      155          ; test bh,high(mask cond2) ; sin(2*N*PI+x) = sin(x)
0051 7544        156          ; jnz angle_too_big
0051 7544        157          ;
0051 7544        158          ; Set sign flags and test for which eighth of the revolution the
0051 7544        159          ; angle fell into.
0051 7544        160          ;
0051 7544        161          ; Assert: -PI/4 < st(0) < PI/4
0051 7544        162          ;
0053 D9E1        163          ; fabs ; Force the argument positive
0053 D9E1        164          ; ; cond1 in bx holds the sign
0055 OAC9        165          ; or cl,cl ; Test for sine or cosine function
0057 740F        166          ; jz sine_select ; Jump if sine function
0057 740F        167          ;
0057 740F        168          ; This is a cosine function. Ignore the original sign of the angle
0057 740F        169          ; and add a quarter revolution to the octant id from the fprem instruction.
0057 740F        170          ; cos(A) = sin(A+PI/2) and cos(-A) = cos(A)
0057 740F        171          ;
0059 80E4FD      172          ; and ah,not high(mask cond1) ; Turn off sign of argument
005C 80CFB0      173          ; or bh,BOH ; Prepare to add O10 to CO,C3,C1
005C 80CFB0      174          ; ; status value in ax
005C 80CFB0      175          ; ; Set busy bit so carry out from
005F 80C740      176          ; add bh,high(mask cond3) ; C3 will go into the carry flag
0062 8000        177          ; mov al,0 ; Extract carry flag
0064 D0D0        178          ; rcl al,1 ; Put carry flag in low bit
0066 32F8        179          ; xor bh,al ; Add carry to CO not changing
0066 32F8        180          ; ; C1 flag
0066 32F8        181          ;
0066 32F8        182          ; See if the argument should be reversed, depending on the octant in
0066 32F8        183          ; which the argument fell during fprem.
0066 32F8        184          ;
0068             185 sine_select:
0068             186          ;
0068 F6C702      187          ; test bh,high(mask cond1) ; Reverse angle if C1 = 1
006B 7404        188          ; jz no_sine_reverse
006B 7404        189          ;
006B 7404        190          ; Angle was in octants 1,3,5,7.
006B 7404        191          ;
006D DEE9        192          ; fsub ; Invert sense of rotation
006F EBOE        193          ; jmp short do_sine_fptan ; 0 < arg <= PI/4
006F EBOE        194          ;
006F EBOE        195          ; Angle was in octants 0,2,4,6.
006F EBOE        196          ; Test for a zero argument since fptan will not work if st(0) = 0
006F EBOE        197          ;
0071             198 no_sine_reverse:
0071             199          ;
0071 D9E4        200          ; ftst ; Test for zero angle
0073 91          201          ; xchg ax,cx
0074 9BDFE0      202          ; fstsw ax ; cond3 = 1 if st(0) = 0
0077 91          203          ; xchg ax,cx
007B DDD9        204          ; fstp st(1) ; Remove PI/4
007A F6C540      205          ; test ch,high(mask cond3) ; If C3=1, argument is zero
007D 7514        206          ; jnz sine_argument_zero

```

Figure 4-7. Calculating Trigonometric Functions (Cont'd.)

```

iAPX286 MACRO ASSEMBLER      80287 Trigonometric Functions      10:13:51 09/25/83 PAGE 4

LOC OBJ                LINE    SOURCE

                                207    ;
                                208    ;
                                209    ;
007F                    210    do_sine_fptan:
                                211
007F D9F2              212    fptan                        ; TAN ST(0) = ST(1)/ST(0) = Y/X
                                213
0081                    214    after_sine_fptan:
                                215
0081 F6C742            216    test    bh,high(mask cond3 + mask cond1); Look at octant angle fell into
0084 7B1A              217    jpo    X_numerator           ; Calculate cosine for octants
                                218    ;
                                219    ;
                                220    ;
                                221    ; Calculate the sine of the argument.
                                222    ; sin(A) = tan(A)/sqrt(1+tan(A)**2)    if tan(A) = Y/X then
                                223    ; sin(A) = Y/sqrt(X*X + Y*Y)
                                224
0086 D9C1              224    fld    st(1)                 ; Copy Y value
008B EB1A              225    jmp    short finish_sine     ; Put Y value in numerator
                                226
                                227    ; The top of the stack is either NAN, infinity, or empty.
                                228
008A                    229    funny_parameter:
                                230
008A DDD8              231    fstp   st(0)                ; Remove PI/4
008C 7404              232    jz     return_empty         ; Return empty if no parm
                                233
008E 7B02              234    jpo    return_NAN          ; Jump if st(0) is NAN
                                235
                                236    ; st(0) is infinity. Return an indefinite value.
                                237
0090 D9FB              238    fprem                       ; ST(1) can be anything
                                239
0092                    240    return_NAN:
0092                    241    return_empty:
                                242
0092 C3                243    ret                         ; Ok to leave fprem running
                                244
                                245    ;
                                246    ; Simulate fptan with st(0) = 0
                                247
0093                    247    sine_argument_zero:
                                248
0093 D9E8              249    fldl   ; Simulate tan(0)
0095 EBEA              250    jmp    after_sine_fptan     ; Return the zero value
                                251
                                252    ;
                                253    ; The angle was too large. Remove the modulus and dividend from the
                                254    ; stack and return an indefinite result.
                                255
0097                    255    angle_too_big:
                                256
0097 DED9              257    fcompp ; Pop two values from the stack
0099 2ED9060A00        R 258    fld    indefinite           ; Return indefinite
009E 9B                259    fuwait ; Wait for load to finish
009F C3                260    ret
                                261
                                262    ; Calculate the cosine of the argument.
                                263    ; cos(A) = 1/sqrt(1+tan(A)**2)    if tan(A) = Y/X then
                                264    ; cos(A) = X/sqrt(X*X + Y*Y)
                                265
00A0                    266    X_numerator:
                                267
00A0 D9C0              268    fld    st(0)                 ; Copy X value
00A2 D9CA              269    fxch   st(2)                ; Put X in numerator
                                270
00A4                    271    finish_sine:
                                272
00A4 DCCB              273    fmul   st,st(0)             ; Form X*X + Y*Y
00A6 D9C9              274    fxch   ;
00AB DCCB              275    fmul   st,st(0)             ;
00AA DEC1              276    fadd   ; st(0) = X*X + Y*Y
00AC D9FA              277    fsqrt  ; st(0) = sqrt(X*X + Y*Y)
                                278
                                279
                                280    ; Form the sign of the result. The two conditions are the C1 flag from
                                281    ; FXAM in bh and the CO flag from fprem in ah.
                                282
00AE B0E701            283    and    bh,high(mask cond0)   ; Look at the fprem CO flag
00B1 B0E402            284    and    ah,high(mask cond1)   ; Look at the fxam C1 flag
00B4 0AFC              285    or     bh,ah                ; Even number of flags cancel
00B6 7A02              286    jpe    positive_sine        ; Two negatives make a positive
                                287
00BB D9E0              288    fchs                        ; Force result negative
                                289
00BA                    290    positive_sine:
                                291
00BA DEF9              292    fdiv   ; Form final result
00BC C3                293    ret                         ; Ok to leave fdiv running
                                294
                                295    cosine endp
00B6 +1              296    reject
                                297
                                298    ;
                                299    ; This function will calculate the tangent of an angle.
                                300    ; The angle, in radians is passed in ST(0), the tangent is returned
                                ; in ST(0). The tangent is calculated to an accuracy of 4 units in the

```

Figure 4-7. Calculating Trigonometric Functions (Cont'd.)

```

iAPX286 MACRO ASSEMBLER      80287 Trigonometric Functions      10:13:51 09/25/83 PAGE 5

LOC  OBJ                LINE  SOURCE
301      ;               301      ; least three significant bits of an extended real format number. The
302      ;               302      ; PLM/86 calling format is:
303      ;               303      ;
304      ;               304      ; tangent: procedure (angle) real external;
305      ;               305      ; declare angle real;
306      ;               306      ; end tangent;
307      ;               307      ;
308      ;               308      ; Two stack registers are used. The result of the tangent function is
309      ;               309      ; defined for the following cases:
310      ;               310      ;
311      ;               311      ;
312      ;               312      ; angle result
313      ;               313      ; valid or unnormal < 2**62 in magnitude correct value
314      ;               314      ; 0 0
315      ;               315      ; denormal correct denormal
316      ;               316      ; valid or unnormal > 2**62 in magnitude indefinite
317      ;               317      ; NAN NAN
318      ;               318      ; infinity indefinite
319      ;               319      ; empty empty
320      ;               320      ;
321      ;               321      ; The tangent instruction uses the fptan instruction. Four possible
322      ;               322      ; relations are used:
323      ;               323      ;
324      ;               324      ; Let R = angle MOD PI/4!
325      ;               325      ; S = -1 or 1 depending on the sign of the angle
326      ;               326      ;
327      ;               327      ; 1) tan(R) 2) tan(PI/4-R) 3) 1/tan(R) 4) 1/tan(PI/4-R)
328      ;               328      ;
329      ;               329      ; The following table is used to decide which relation to use depending
330      ;               330      ; on in which octant the angle fell.
331      ;               331      ;
332      ;               332      ; octant relation
333      ;               333      ;
334      ;               334      ; 0 S*1
335      ;               335      ; 1 S*4
336      ;               336      ; 2 -S*3
337      ;               337      ; 3 -S*2
338      ;               338      ; 4 S*1
339      ;               339      ; 5 S*4
340      ;               340      ; 6 -S*3
341      ;               341      ; 7 -S*2
342      ;               342      ;
00BD      343      tangent proc
344      ;               344      ;
00BD D9E5      345      ; fxam ; Look at the parameter
00BF 9BDFE0      346      ; fsts ax ; Get fpm status
00C2 2EDB2E0000 R 347      ; fld pi_quarter ; Get PI/4
00C7 9E      348      ; sahf ; CF = CO, PF = C2, ZF = C3
00C8 72C0      349      ; jc funny_parameter
350      ;               350      ;
351      ;               351      ; Angle is unnormal, normal, zero, or denormal.
352      ;               352      ;
00CA D9C9      353      ; fxch ; st(0) = angle, st(1) = PI/4
00CC 7A17      354      ; jpe tan_zero_unnormal
355      ;               355      ;
356      ;               356      ; Angle is either a normal or denormal.
357      ;               357      ; Reduce the angle to the range -PI/4 < result < PI/4.
358      ;               358      ; If fprem cannot perform this operation in one try, the magnitude of the
359      ;               359      ; angle must be > 2**62. Such an angle is so large that any rounding
360      ;               360      ; errors could make a very large difference in the reduced angle.
361      ;               361      ; It is safest to call this very rare case an error.
362      ;               362      ;
00CE      363      tan_normal:
364      ;               364      ;
00CE D9FB      365      ; fprem ; Quotient in CO,C3,C1
366      ;               366      ; Convert denormals into unnormals
00D0 93      367      ; xchg ax,bx
00D1 9BDFE0      368      ; fsts ax ; Quotient identifies octant
369      ;               369      ; original angle fell into
00D4 93      370      ; xchg ax,bx
00D5 F6C704      371      ; test bh,high(mask cond2) ; Test for complete reduction
00D8 75BD      372      ; jnz angle_too_big ; Exit if angle was too big
373      ;               373      ;
374      ;               374      ; See if the angle must be reversed.
375      ;               375      ;
376      ;               376      ; Assert: -PI/4 < st(0) < PI/4
377      ;               377      ;
00DA D9E1      378      ; fabs ; 0 <= st(0) < PI/4
379      ;               379      ; C3 in bx has the sign flag
00DC F6C702      380      ; test bh,high(mask cond1) ; must be reversed
00DF 740E      381      ; jz no_tan_reverse
382      ;               382      ;
383      ;               383      ; Angle fell in octants 1,3,5,7. Reverse it, subtract it from PI/4.
384      ;               384      ;
00E1 DEE9      385      ; fsub ; Reverse angle
00E3 EB18      386      ; jmp short do_tangent
387      ;               387      ;
388      ;               388      ; Angle is either zero or an unnormal.
389      ;               389      ;
00E5      390      tan_zero_unnormal:
391      ;               391      ;
00E5 DDD9      392      ; fstp st(1) ; Remove PI/4
00E7 7405      393      ; jz tan_angle_zero
394      ;               394      ;
395      ;               395      ; Angle is an unnormal.

```

Figure 4-7. Calculating Trigonometric Functions (Cont'd.)

```

iAPX286 MACRO ASSEMBLER      80287 Trigonometric Functions                10:13:51 09/25/83 PAGE 6
LOC OBJ                LINE    SOURCE
                                396 ;
00E9 E83300           397         call    normalize_value
00EC EBE0             398         jmp     tan_normal
                                399
00EE                400     tan_angle_zero:
                                401
00EE C3              402         ret
                                403
                                404 ;
                                405 ;           Angle fell in octants 0,2,4,6.  Test for st(0) = 0, fptan won't work.
00EF                406     no_tan_reverse:
                                407
00EF D9E4           408         fstst                ; Test for zero angle
00F1 91             409         xchg     ax,cx
00F2 9BDFE0        410         fstsw     ax                ; C3 = 1 if st(0) = 0
00F5 91             411         xchg     ax,cx
00F8 DDD9          412         fstp     st(1)
00FB F6C540        413         test     ch,high(mask cond3) ; Remove PI/4
00FB 7515          414         jnz     tan_zero
                                415
00FD                416     do_tangent:
                                417
00FD D9F2           418         fptan                ; tan ST(0) = ST(1)/ST(0)
                                419
00FF                420     after_tangent:
                                421 ;
                                422 ;           Decide on the order of the operands and their sign for the divide
                                423 ;           operation while the fptan instruction is working.
                                424
00FF 8AC7           425         mov     al,bh                ; Get a copy of fprem C3 flag
0101 254002        426         and     ax,mask cond1 + high(mask cond3); Examine fprem C3 flag and
                                427 ;           FXAM C1 flag
0104 F6C742        428         test     bh,high(mask cond1 + mask cond3); Use reverse divide if in
                                429 ;           octants 1,2,5,6
0107 7B0D          430         jpo     reverse_divide    ; Note! parity works on low
                                431 ;           8 bits only!
                                432 ;
                                433 ;           Angle was in octants 0,3,4,7.
                                434 ;           Test for the sign of the result.  Two negatives cancel.
                                435
0109 0AC4           436         or     al,ah
010B 7A02          437         jpe     positive_divide
                                438
010D D9E0           439         fchs                ; Force result negative
                                440
010F                441     positive_divide:
                                442
010F DEF9           443         fdiv                ; Form result
0111 C3             444         ret                ; Ok to leave fdiv running
                                445
0112                446     tan_zero:
                                447
0112 D9EB           448         fldi                ; Force 1/0 = tan(PI/2)
0114 EBE9          449         jmp     after_tangent
                                450
                                451 ;
                                452 ;           Angle was in octants 1,2,5,6.
                                453 ;           Set the correct sign of the result.
                                454
0116                455     reverse_divide:
                                456
0116 0AC4           456         or     al,ah
0118 7A02          457         jpe     positive_r_divide
                                458
011A D9E0           459         fchs                ; Force result negative
                                460
011C                461     positive_r_divide:
                                462
011C DEF1           463         fdivr               ; Form reciprocal of result
011E C3             464         ret                ; Ok to leave fdiv running
                                465
011F                466     tangent endp
                                467 ;
                                468 ;           This function will normalize the value in st(0).
                                469 ;           Then PI/4 is placed into st(1).
                                470 ;
011F                471     normalize_value:
                                472
011F D9E1           473         fabs                ; Force value positive
0121 D9F4           474         ftract              ; 0 <= st(0) < 1
0123 D9EB          475         fldi                ; Get normalize bit
0125 DCC1          476         fadd     st(1),st    ; Normalize fraction
0127 DEE9          477         fsub                ; Restore original value
0129 D9FD          478         fscale              ; Form original normalized value
012B DDD9          479         fstp     st(1)        ; Remove scale factor
012D 2EBD2E0000    R 480         fld     pi_quarter    ; Get PI/4
0132 D9C9          481         frch
0134 C3             482         ret
                                483
----                484     code ends
                                485     end
ASSEMBLY COMPLETE.  NO WARNINGS.  NO ERRORS

```

Figure 4-7. Calculating Trigonometric Functions (Cont'd.)

Appendix
Machine Instruction
Encoding And Decoding

A

APPENDIX A

MACHINE INSTRUCTION ENCODING AND DECODING

Machine instructions for the 80287 come in one of five different forms as shown in table A-1. In all cases, the instructions are at least two bytes long and begin with the bit pattern 11011B, which identifies the ESCAPE class of instructions. Instructions that reference memory operands are encoded much like similar CPU instructions, because all of the CPU memory-addressing modes may be used with ESCAPE instructions.

Note that several of the processor control instructions (see table 2-11 in Chapter Two) may be preceded by an assembler-generated CPU WAIT instruction (encoding: 10011011B) if they are programmed using the WAIT form of their mnemonics. The ASM286 assembler inserts a WAIT instruction only before these specific *processor control* instructions—all of the *numeric* instructions are automatically synchronized by the 80286 CPU and an explicit WAIT instruction, though allowed, is not necessary.

Table A-1. 80287 Instruction Encoding

| | Lower-Addressed Byte | | | | | | Higher-Addressed Byte | | | | | | 0, 1, or 2 bytes | | | |
|-----|----------------------|---|---|---|---|--------|-----------------------|------|------|------|--------------|--------------|------------------|---|---|---|
| (1) | 1 | 1 | 0 | 1 | 1 | OP-A | 1 | MOD | 1 | OP-B | R/M | DISPLACEMENT | | | | |
| (2) | 1 | 1 | 0 | 1 | 1 | FORMAT | OP-A | MOD | OP-B | R/M | DISPLACEMENT | | | | | |
| (3) | 1 | 1 | 0 | 1 | 1 | R | P | OP-A | 1 | 1 | OP-B | REG | | | | |
| (4) | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 1 | OP | | | | |
| (5) | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | OP | | | | |
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |

NOTES:

- (1)Memory transfers, including applicable processor control instructions; 0, 1, or 2 displacement bytes may follow.
- (2)Memory arithmetic and comparison instructions; 0, 1, or 2 displacement bytes may follow.
- (3)Stack arithmetic and comparison instructions.
- (4)Constant, transcendental, some arithmetic instructions.
- (5)Processor control instructions that do not reference memory.

OP, OP-A, OP-B: Instruction opcode, possibly split into two fields.

MOD: Same as 80286 CPU mode field.

R/M: Same as 80286 CPU register/memory field.

FORMAT: Defines memory operand

- 00 = short real
- 01 = short integer
- 10 = long real
- 11 = word integer

R: 0 = return result to stack top
 1 = return result to other register

P: 0 = do not pop stack
 1 = pop stack after operation

REG: register stack element

000 = stack top

001 = next on stack

010 = third stack element, etc.

Table A-2 lists all 80287 machine instructions in binary sequence. This table may be used to “disassemble” instructions in unformatted memory dumps or instructions monitored from the data bus. Users writing exception handlers may also find this information useful to identify the offending instruction.

Table A-2. Machine Instruction Decoding Guide

| 1st Byte | | 2nd Byte | Bytes 3, 4 | ASM286 Instruction Format | |
|----------|-----------|------------|---------------------|---------------------------|------------|
| Hex | Binary | | | | |
| D8 | 1101 1000 | MOD00 0R/M | (disp-lo),(disp-hi) | FADD | short-real |
| D8 | 1101 1000 | MOD00 1R/M | (disp-lo),(disp-hi) | FMUL | short-real |
| D8 | 1101 1000 | MOD01 0R/M | (disp-lo),(disp-hi) | FCOM | short-real |
| D8 | 1101 1000 | MOD01 1R/M | (disp-lo),(disp-hi) | FCOMP | short-real |
| D8 | 1101 1000 | MOD10 0R/M | (disp-lo),(disp-hi) | FSUB | short-real |
| D8 | 1101 1000 | MOD10 1R/M | (disp-lo),(disp-hi) | FSUBR | short-real |
| D8 | 1101 1000 | MOD11 0R/M | (disp-lo),(disp-hi) | FDIV | short-real |
| D8 | 1101 1000 | MOD11 1R/M | (disp-lo),(disp-hi) | FDIVR | short-real |
| D8 | 1101 1000 | 1100 0REG | | FADD | ST,ST(i) |
| D8 | 1101 1000 | 1100 1REG | | FMUL | ST,ST(i) |
| D8 | 1101 1000 | 1101 0REG | | FCOM | ST(i) |
| D8 | 1101 1000 | 1101 1REG | | FCOMP | ST(i) |
| D8 | 1101 1000 | 1110 0REG | | FSUB | ST,ST(i) |
| D8 | 1101 1000 | 1110 1REG | | FSUBR | ST,ST(i) |
| D8 | 1101 1000 | 1111 0REG | | FDIV | ST,ST(i) |
| D8 | 1101 1000 | 1111 1REG | | FDIVR | ST,ST(i) |
| D9 | 1101 1001 | MOD00 0R/M | (disp-lo),(disp-hi) | FLD | short-real |
| D9 | 1101 1001 | MOD00 1R/M | | reserved | |
| D9 | 1101 1001 | MOD01 0R/M | (disp-lo),(disp-hi) | FST | short-real |
| D9 | 1101 1001 | MOD01 1R/M | (disp-lo),(disp-hi) | FSTP | short-real |
| D9 | 1101 1001 | MOD10 0R/M | (disp-lo),(disp-hi) | FLDENV | 14-bytes |
| D9 | 1101 1001 | MOD10 1R/M | (disp-lo),(disp-hi) | FLDCW | 2-bytes |
| D9 | 1101 1001 | MOD11 0R/M | (disp-lo),(disp-hi) | FSTENV | 14-bytes |
| D9 | 1101 1001 | MOD11 1R/M | (disp-lo),(disp-hi) | FSTCW | 2-bytes |
| D9 | 1101 1001 | 1100 0REG | | FLD | ST(i) |
| D9 | 1101 1001 | 1100 1REG | | FXCH | ST(i) |
| D9 | 1101 1001 | 1101 0000 | | FNOP | |
| D9 | 1101 1001 | 1101 0001 | | reserved | |
| D9 | 1101 1001 | 1101 001- | | reserved | |
| D9 | 1101 1001 | 1101 01-- | | reserved | |
| D9 | 1101 1001 | 1101 1REG | | *(1) | |
| D9 | 1101 1001 | 1110 0000 | | FCHS | |
| D9 | 1101 1001 | 1110 0001 | | FABS | |
| D9 | 1101 1001 | 1110 001- | | reserved | |
| D9 | 1101 1001 | 1110 0100 | | FTST | |
| D9 | 1101 1001 | 1110 0101 | | FXAM | |
| D9 | 1101 1001 | 1110 011- | | reserved | |
| D9 | 1101 1001 | 1110 1000 | | FLD1 | |
| D9 | 1101 1001 | 1110 1001 | | FLDL2T | |
| D9 | 1101 1001 | 1110 1010 | | FLDL2E | |
| D9 | 1101 1001 | 1110 1011 | | FLDPI | |
| D9 | 1101 1001 | 1110 1100 | | FLDLG2 | |

Table A-2. Machine Instruction Decoding Guide (Cont'd.)

| 1st Byte | | 2nd Byte | Bytes 3, 4 | ASM286 Instruction Format | |
|----------|-----------|------------|---------------------|---------------------------|---------------|
| Hex | Binary | | | | |
| D9 | 1101 1001 | 1110 1101 | | FLDLN2 | |
| D9 | 1101 1001 | 1110 1110 | | FLDZ | |
| D9 | 1101 1001 | 1110 1111 | | reserved | |
| D9 | 1101 1001 | 1111 0000 | | F2XM1 | |
| D9 | 1101 1001 | 1111 0001 | | FYL2X | |
| D9 | 1101 1001 | 1111 0010 | | FPTAN | |
| D9 | 1101 1001 | 1111 0011 | | FPATAN | |
| D9 | 1101 1001 | 1111 0100 | | FEXTRACT | |
| D9 | 1101 1001 | 1111 0101 | | reserved | |
| D9 | 1101 1001 | 1111 0110 | | FDECSTP | |
| D9 | 1101 1001 | 1111 0111 | | FINCSTP | |
| D9 | 1101 1001 | 1111 1000 | | FPREM | |
| D9 | 1101 1001 | 1111 1001 | | FYL2XP1 | |
| D9 | 1101 1001 | 1111 1010 | | FSQRT | |
| D9 | 1101 1001 | 1111 1011 | | reserved | |
| D9 | 1101 1001 | 1111 1100 | | FRNDINT | |
| D9 | 1101 1001 | 1111 1101 | | FSCALE | |
| D9 | 1101 1001 | 1111 111- | | reserved | |
| DA | 1101 1010 | MOD00 0R/M | (disp-lo),(disp-hi) | FIADD | short-integer |
| DA | 1101 1010 | MOD00 1R/M | (disp-lo),(disp-hi) | FIMUL | short-integer |
| DA | 1101 1010 | MOD01 0R/M | (disp-lo),(disp-hi) | FICOM | short-integer |
| DA | 1101 1010 | MOD01 1R/M | (disp-lo),(disp-hi) | FICOMP | short-integer |
| DA | 1101 1010 | MOD10 0R/M | (disp-lo),(disp-hi) | FISUB | short-integer |
| DA | 1101 1010 | MOD10 1R/M | (disp-lo),(disp-hi) | FISUBR | short-integer |
| DA | 1101 1010 | MOD11 0R/M | (disp-lo),(disp-hi) | FIDIV | short-integer |
| DA | 1101 1010 | MOD11 1R/M | (disp-lo),(disp-hi) | FIDIVR | short-integer |
| DA | 1101 1010 | 11-- ---- | | reserved | |
| DB | 1101 1011 | MOD00 0R/M | (disp-lo),(disp-hi) | FILD | short-integer |
| DB | 1101 1011 | MOD00 1R/M | (disp-lo),(disp-hi) | reserved | |
| DB | 1101 1011 | MOD01 0R/M | (disp-lo),(disp-hi) | FIST | short-integer |
| DB | 1101 1011 | MOD01 1R/M | (disp-lo),(disp-hi) | FISTP | short-integer |
| DB | 1101 1011 | MOD10 0R/M | (disp-lo),(disp-hi) | reserved | |
| DB | 1101 1011 | MOD10 1R/M | (disp-lo),(disp-hi) | FLD | temp-real |
| DB | 1101 1011 | MOD11 0R/M | (disp-lo),(disp-hi) | reserved | |
| DB | 1101 1011 | MOD11 1R/M | (disp-lo),(disp-hi) | FSTP | temp-real |
| DB | 1101 1011 | 110- ---- | | reserved | |
| DB | 1101 1011 | 1110 0000 | | reserved (8087 FENI) | |
| DB | 1101 1011 | 1110 0001 | | reserved (8087 FDISI) | |
| DB | 1101 1011 | 1110 0010 | | FCLEX | |
| DB | 1101 1011 | 1110 0011 | | FINIT | |
| DB | 1101 1011 | 1110 0100 | | FSETPM | |
| DB | 1101 1011 | 1110 1--- | | reserved | |
| DB | 1101 1011 | 1111 ---- | | reserved | |
| DC | 1101 1100 | MOD00 0R/M | (disp-lo),(disp-hi) | FADD | long-real |
| DC | 1101 1100 | MOD00 1R/M | (disp-lo),(disp-hi) | FMUL | long-real |
| DC | 1101 1100 | MOD01 0R/M | (disp-lo),(disp-hi) | FCOM | long-real |
| DC | 1101 1100 | MOD01 1R/M | (disp-lo),(disp-hi) | FCOMP | long-real |
| DC | 1101 1100 | MOD10 0R/M | (disp-lo),(disp-hi) | FSUB | long-real |
| DC | 1101 1100 | MOD10 1R/M | (disp-lo),(disp-hi) | FSUBR | long-real |
| DC | 1101 1100 | MOD11 0R/M | (disp-lo),(disp-hi) | FDIV | long-real |
| DC | 1101 1100 | MOD11 1R/M | (disp-lo),(disp-hi) | FDIVR | long-real |
| DC | 1101 1100 | 1100 0REG | | FADD | ST(i),ST |
| DC | 1101 1100 | 1100 1REG | | FMUL | ST(i),ST |
| DC | 1101 1100 | 1101 0REG | | *{2} | |

Table A-2. Machine Instruction Decoding Guide (Cont'd.)


| 1st Byte | | 2nd Byte | Bytes 3, 4 | ASM286 Instruction Format | |
|----------|-----------|------------|---------------------|---------------------------|----------------|
| Hex | Binary | | | | |
| DC | 1101 1100 | 1101 1REG | | * (3) | |
| DC | 1101 1100 | 1110 0REG | | FSUB | ST(i),ST |
| DC | 1101 1100 | 1110 1REG | | FSUBR | ST(i),ST |
| DC | 1101 1100 | 1111 0REG | | FDIV | ST(i),ST |
| DC | 1101 1100 | 1111 1REG | | FDIVR | ST(i),ST |
| DD | 1101 1101 | MOD00 0R/M | (disp-lo),(disp-hi) | FLD | long-real |
| DD | 1101 1101 | MOD00 1R/M | | reserved | |
| DD | 1101 1101 | MOD01 0R/M | (disp-lo),(disp-hi) | FST | long-real |
| DD | 1101 1101 | MOD01 1R/M | (disp-lo),(disp-hi) | FSTP | long-real |
| DD | 1101 1101 | MOD10 0R/M | (disp-lo),(disp-hi) | FRSTOR | 94-bytes |
| DD | 1101 1101 | MOD10 1R/M | (disp-lo),(disp-hi) | reserved | |
| DD | 1101 1101 | MOD11 0R/M | (disp-lo),(disp-hi) | FSAVE | 94-bytes |
| DD | 1101 1101 | MOD11 1R/M | (disp-lo),(disp-hi) | FSTSW | 2-bytes |
| DD | 1101 1101 | 1100 0REG | | FFREE | ST(i) |
| DD | 1101 1101 | 1100 1REG | | * (4) | |
| DD | 1101 1101 | 1101 0REG | | FST | ST(i) |
| DD | 1101 1101 | 1101 1REG | | FSTP | ST(i) |
| DD | 1101 1101 | 111- ---- | | reserved | |
| DE | 1101 1110 | MOD00 0R/M | (disp-lo),(disp-hi) | FIADD | word-integer |
| DE | 1101 1110 | MOD00 1R/M | (disp-lo),(disp-hi) | FIMUL | word-integer |
| DE | 1101 1110 | MOD01 0R/M | (disp-lo),(disp-hi) | FICOM | word-integer |
| DE | 1101 1110 | MOD01 1R/M | (disp-lo),(disp-hi) | FICOMP | word-integer |
| DE | 1101 1110 | MOD10 0R/M | (disp-lo),(disp-hi) | FISUB | word-integer |
| DE | 1101 1110 | MOD10 1R/M | (disp-lo),(disp-hi) | FISUBR | word-integer |
| DE | 1101 1110 | MOD11 0R/M | (disp-lo),(disp-hi) | FIDIV | word-integer |
| DE | 1101 1110 | MOD11 1R/M | (disp-lo),(disp-hi) | FIDIVR | word-integer |
| DE | 1101 1110 | 1100 0REG | | FADDP | ST(i),ST |
| DE | 1101 1110 | 1100 1REG | | FMULP | ST(i),ST |
| DE | 1101 1110 | 1101 0--- | | * (5) | |
| DE | 1101 1110 | 1101 1000 | | reserved | |
| DE | 1101 1110 | 1101 1001 | | FCOMPP | |
| DE | 1101 1110 | 1101 101- | | reserved | |
| DE | 1101 1110 | 1101 11-- | | reserved | |
| DE | 1101 1110 | 1110 0REG | | FSUBP | ST(i),ST |
| DE | 1101 1110 | 1110 1REG | | FSUBRP | ST(i),ST |
| DE | 1101 1110 | 1111 0REG | | FDIVP | ST(i),ST |
| DE | 1101 1110 | 1111 1REG | | FDIVRP | ST(i),ST |
| DF | 1101 1111 | MOD00 0R/M | (disp-lo),(disp-hi) | FILD | word-integer |
| DF | 1101 1111 | MOD00 1R/M | (disp-lo),(disp-hi) | reserved | |
| DF | 1101 1111 | MOD01 0R/M | (disp-lo),(disp-hi) | FIST | word-integer |
| DF | 1101 1111 | MOD01 1R/M | (disp-lo),(disp-hi) | FISTP | word-integer |
| DF | 1101 1111 | MOD10 0R/M | (disp-lo),(disp-hi) | FBLD | packed-decimal |
| DF | 1101 1111 | MOD10 1R/M | (disp-lo),(disp-hi) | FILD | long-integer |
| DF | 1101 1111 | MOD11 0R/M | (disp-lo),(disp-hi) | FBSTP | packed-decimal |
| DF | 1101 1111 | MOD11 1R/M | (disp-lo),(disp-hi) | FISTP | long-integer |
| DF | 1101 1111 | 1100 0REG | | * (6) | |
| DF | 1101 1111 | 1100 1REG | | * (7) | |
| DF | 1101 1111 | 1101 0REG | | * (8) | |
| DF | 1101 1111 | 1101 1REG | | * (9) | |
| DF | 1101 1111 | 1110 000 | | FSTSW AX | |
| DF | 1101 1111 | 1111 XXX | | reserved | |

NOTE:

* The marked encodings are *not* generated by the language translators. If, however, the 80287 encounters one of these encodings in the instruction stream, it will execute it as follows:

- (1) FSTP ST(i)
- (2) FCOM ST(i)
- (3) FCOMP ST(i)
- (4) FXCH ST(i)
- (5) FCOMP ST(i)
- (6) FFREE ST(i) and pop stack
- (7) FXCH ST(i)
- (8) FSTP ST(i)
- (9) FSTP ST(i)

Appendix **B**
Compatibility Between
The 80287 NPX And The 8087



APPENDIX B

COMPATIBILITY BETWEEN THE 80287 NPX AND THE 8087

The iAPX 286/20 operating in Real-Address mode will execute iAPX 86/20 programs without major modification. However, because of differences in the handling of numeric exceptions by the 80287 NPX and the 8087 NPX, exception-handling routines *may* need to be changed.

This appendix summarizes the differences between the 80287 NPX and the 8087 NPX, and provides details showing how iAPX 86/20 programs can be ported to the iAPX 286/20.

1. The NPX signals exceptions through a dedicated ERROR line to the 80286. The NPX error signal does not pass through an interrupt controller (the 8087 INT signal does). Therefore, any interrupt-controller-oriented instructions in numeric exception handlers for the iAPX 86/20 should be deleted.
2. The 8087 instructions FENI/FNENI and FDISI/FNDISI perform no useful function in the 80287. If the 80287 encounters one of these opcodes in its instruction stream, the instruction will effectively be ignored—none of the 80287 internal states will be updated. While iAPX 86/20 code containing these instructions may be executed on the iAPX 286/20, it is unlikely that the exception-handling routines containing these instructions will be completely portable to the 80287.
3. Interrupt vector 16 must point to the numeric exception handling routine.
4. The ESC instruction address saved in the 80287 includes any leading prefixes before the ESC opcode. The corresponding address saved in the 8087 does not include leading prefixes.
5. In Protected-Address mode, the format of the 80287's saved instruction and address pointers is different than for the 8087. The instruction opcode is not saved in Protected mode—exception handlers will have to retrieve the opcode from memory if needed.
6. Interrupt 7 will occur in the 80286 when executing ESC instructions with either TS (task switched) or EM (emulation) of the 80286 MSW set (TS=1 or EM=1). If TS is set, then a WAIT instruction will also cause interrupt 7. An exception handler should be included in iAPX 286/20 code to handle these situations.
7. Interrupt 9 will occur if the second or subsequent words of a floating-point operand fall outside a segment's size. Interrupt 13 will occur if the starting address of a numeric operand falls outside a segment's size. An exception handler should be included in iAPX 286/20 code to report these programming errors.
8. Except for the processor control instructions, all of the 80287 numeric instructions are automatically synchronized by the 80286 CPU—the 80286 automatically tests the BUSY line from the 80287 to ensure that the 80287 has completed its previous instruction before executing the next ESC instruction. No explicit WAIT instructions are required to assure this synchronization. For the 8087 used with iAPX 86 and iAPX 88 processors, explicit WAITs are required before each numeric instruction to ensure synchronization. Although iAPX 86/20 programs having explicit WAIT instructions will execute perfectly on the iAPX 286/20 without reassembly, these WAIT instructions are unnecessary.
9. Since the 80287 does not require WAIT instructions before each numeric instruction, the ASM286 assembler does not automatically generate these WAIT instructions. The ASM86 assembler, however, automatically precedes every ESC instruction with a WAIT instruction. Although numeric routines generated using the ASM86 assembler will generally execute correctly on the iAPX 286/20, reassembly using ASM286 may result in a more compact code image.

The processor control instructions for the 80287 may be coded using either a WAIT or No-WAIT form of mnemonic. The WAIT forms of these instructions cause ASM286 to precede the ESC instruction with a CPU WAIT instruction, in the identical manner as does ASM86.

10. A recommended way to detect the presence of an 80287 in an iAPX 286 system (or an 8087 in an iAPX 86 system) is shown below. It assumes that the system hardware causes the data bus to be high if no 80287 is present to drive the data lines during the FSTSW (Store 80287 Status Word) instruction.

```

FND_287: FNINIT          ; initialize numeric processor.
          FSTSTW  STAT    ; store status word into location
                               ; STAT.

          MOV     AX,STAT
          OR     AL,AL    ; Zero Flag reflects result of OR.
          JZ     GOT_287  ; Zero in AL means 80287 is
                               ; present.

;
;   No 80287 Present
;
          SMSW   AX
          OR     AX,0004H ; set EM bit in Machine Status
                               ; Word.
          LMSW   AX      ; to enable software emulation of
                               ; 287.
          JMP    CONTINUE

;
;   80287 is present in system
;
GOT_287: SMSW   AX
          OR     AX,0002H ; set MP bit in Machine Status Word
          LMSW   AX      ; to permit normal 80287 operation

;
;   Continue . . .
;
CONTINUE:                               ; and off we go

```

An 80286/80287 design must place a pullup resistor on one of the low eight data bus bits of the 80286 to be sure it is read as a high when no 80287 is present.

Appendix
Implementing The
IEEE P754 Standard

C



APPENDIX C

IMPLEMENTING THE IEEE P754 STANDARD

The iAPX 286/20 computing system, containing the 80287 NPX and standard support library software, provides an implementation of the IEEE "A Proposed Standard for Binary Floating-Point Arithmetic," Draft 10.0, Task P754, of December 2, 1982. The *80287 Support Library*, described in *80287 Support Library Reference Manual*, Order Number 122129, is an example of such a support library.

This appendix describes the relationship between the 80287 NPX and the IEEE Standard. Where the Standard has options, Intel's choices in implementing the 80287 are described. Where portions of the Standard are implemented through software, this appendix indicates which modules of the 80287 Support Library implement the Standard. Where special software in addition to the Support Library may be required by your application, this appendix indicates how to write this software.

This appendix contains many terms with precise technical meanings, specified in the 754 Standard. Where these terms are used, they have been capitalized to emphasize the precision of their meanings. The Glossary provides the definitions for all capitalized phrases in this appendix.

OPTIONS IMPLEMENTED IN THE 80287

The 80287 SHORT_REAL and LONG_REAL formats conform precisely to the Standard's Single and Double Floating-Point Numbers, respectively. The 80287 TEMP_REAL format is the same as the Standard's Double Extended format. The Standard allows a choice of Bias in representing the exponent; the 80287 uses the Bias 16383 decimal.

For the Double Extended format, the Standard contains an option for the meaning of the minimum exponent combined with a nonzero significand. The Bias for this special case can be either 16383, as in all the other cases, or 16382, making the smallest exponent equivalent to the second-smallest exponent. The 80287 uses the Bias 16382 for this case. This allows the 80287 to distinguish between Denormal numbers (integer part is zero, fraction is nonzero, Biased exponent is 0) and Unnormal numbers of the same value (same as the denormal except the Biased Exponent is 1).

The Standard allows flexibility in specifying which NaNs are trapping and which are nontrapping. The EH287.LIB module of the 80287 Support Library provides a software implementation of nontrapping NaNs, and defines one distinction between trapping and nontrapping NaNs: If the most significant bit of the fractional part of a NaN is 1, the NaN is nontrapping. If it is 0, the NaN is trapping.

When a masked Invalid Operation error involves two NaN inputs, the Standard allows flexibility in choosing which NaN is output. The 80287 selects the NaN whose absolute value is greatest.

AREAS OF THE STANDARD IMPLEMENTED IN SOFTWARE

There are five areas of the Standard that are not implemented directly in the 80287 hardware; these areas are instead implemented in software as part of the 80287 Support Library.

1. The Standard requires that a Normalizing Mode be provided, in which any nonnormal operands to functions are automatically normalized before the function is performed. The NPX provides a "Denormal operand" exception for this case, allowing the exception handler the opportunity to perform the normalization specified by the Standard. The Denormal operand exception handler

provided by EH287.LIB implements the Standard's Normalizing Mode completely for Single- and Double-precision arguments. Normalizing mode for Double Extended operands is implemented in EH287.LIB with one non-Standard feature, discussed in the next section.

2. The Standard specifies that in comparing two operands whose relationship is "unordered," the equality test yield an answer of FALSE, with no errors or exceptions. The 80287 FCOM and FTST instructions themselves issue an Invalid Operation exception in this case. The error handler EH287.LIB filters out this Invalid Operation error using the following convention: Whenever an FCOM or FTST instruction is followed by a MOV AX,AX instruction (8BC0 Hex), and neither argument is a trapping NaN, the error handler will assume that a Standard equality comparison was intended, and return the correct answer with the Invalid Operation exception flag erased. Note that the Invalid Operation exception must be unmasked for this action to occur.
3. The Standard requires that two kinds of NaN's be provided: trapping and nontrapping. Nontrapping NaNs will not cause further Invalid Operation errors when they occur as operands to calculations. The NPX hardware directly supports only trapping NaN's; the EH287.LIB software implements nontrapping NaNs by returning the correct answer with the Invalid Operation exception flag erased. Note that the Invalid Operation exception must be unmasked for this action to occur.
4. The Standard requires that all functions that convert real numbers to integer formats automatically normalize the inputs if necessary. The integer conversion functions contained in CEL287.LIB fully meet the Standard in this respect; the 80287 FIST instruction alone does not perform this normalization.
5. The Standard specifies the remainder function which is provided by mqrRMD in CEL287.LIB. The 80287 FPREM instruction returns answers within a different range.

ADDITIONAL SOFTWARE TO MEET THE STANDARD

There are two cases in which additional software is required in conjunction with the 80287 Support Library in order to meet the standard. The 80287 Support Library does not provide this software in the interest of saving space and because the vast majority of applications will never encounter these cases.

1. When the Invalid Operation exception is masked, Nontrapping NaNs are not implemented fully. Likewise, the Standard's equality test for "unordered" operands is not implemented when the Invalid Operation exception is masked. Programmers can simulate the Standard notion of a masked Invalid Operation exception by unmasking the 80287 Invalid Operation exception, and providing an Invalid Operation exception handler that supports nontrapping NaNs and the equality test, but otherwise acts just as if the Invalid Operation exception were masked. The *80287 Support Library Reference Manual* contains examples for programming this handler in both ASM286 and PL/M-286.
2. In Normalizing Mode, Denormal operands in the TEMP_REAL format are converted to 0 by EH287.LIB, giving sharp Underflow to 0. The Standard specifies that the operation be performed on the real numbers represented by the denormals, giving gradual underflow. To correctly perform such arithmetic while in Normalizing Mode, programmers would have to normalize the operands into a format identical to TEMP_REAL except for two extra exponent bits, then perform the operation on those numbers. Thus, software must be written to handle the 17-bit exponent explicitly.

In designing the EH287.LIB, it was felt that it would be a disadvantage to most users to increase the size of the Normalizing routine by the amount necessary to provide this expanded arithmetic. Because the TEMP_REAL exponent field is so much larger than the LONG_REAL exponent field, it is extremely unlikely that TEMP_REAL underflow will be encountered in most applications.

If meeting the Standard is a more important criterion for your application than the choice between Normalizing and warning modes, then you can select warning mode (Denormal operand exceptions masked), which fully meets the Standard.

If you do wish to implement the Normalization of denormal operands in TEMP_REAL format using extra exponent bits, the list below indicates some useful pointers about handling Denormal operand exceptions:

1. TEMP_REAL numbers are considered Denormal by the NPX whenever the Biased Exponent is 0 (minimum exponent). This is true even if the explicit integer bit of the significand is 1. Such numbers can occur as the result of Underflow.
2. The 80287 FLD instruction can cause a Denormal Operand error if a number is being loaded from memory. It will not cause this exception if the number is being loaded from elsewhere in the 80287 stack.
3. The 80287 FCOM and FTST instructions will cause a Denormal Operand exception for unnormal operands as well as for denormal operands.
4. In cases where both the Denormal Operand and Invalid Operation exceptions occur, you will want to know which is signalled first. When a comparison instruction operates between a nonexistent stack element and a denormal number in 80286 memory, the D and I exceptions are issued simultaneously. In all other situations, a Denormal Operand exception takes precedence over a nonstack Invalid operation exception, while a stack Invalid Operation exception takes precedence over a Denormal Operand exception.



D

Appendix
80287 80-Bit HMOS
Numeric Processor Extension

80287 80-Bit HMOS NUMERIC PROCESSOR EXTENSION 80287-3

- High Performance 80-Bit Internal Architecture
- Implements Proposed IEEE Floating Point Standard 754
- Expands iAPX 286/10 Datatypes to Include 32-, 64-, 80-Bit Floating Point, 32-, 64-Bit Integers and 18-Digit BCD Operands
- Object Code Compatible with 8087
- Built-in Exception Handling
- Operates in Both Real and Protected Mode iAPX 286 Systems
- Protected Mode Operation Completely Conforms to the iAPX 286 Memory Management and Protection Mechanisms
- Directly Extends iAPX 286/10 Instruction Set to Trigonometric, Logarithmic, Exponential and Arithmetic Instructions for All Datatypes
- 8x80-Bit, Individually Addressable, Numeric Register Stack
- Available in EXPRESS—Standard Temperature Range

The Intel® 80287 is a high performance numerics processor extension that extends the iAPX 286/10 architecture with floating point, extended integer and BCD data types. The iAPX 286/20 computing system (80286 with 80287) fully conforms to the proposed IEEE Floating Point Standard. Using a numerics oriented architecture, the 80287 adds over fifty mnemonics to the iAPX 286/20 instruction set, making the iAPX 286/20 a complete solution for high performance numeric processing. The 80287 is implemented in N-channel, depletion load, silicon gate technology (HMOS) and packaged in a 40-pin ceramic package. The iAPX 286/20 is object code compatible with the iAPX 86/20 and iAPX 88/20.


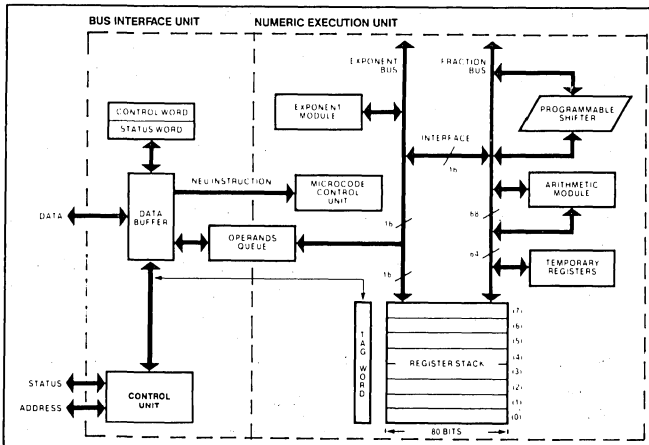


Figure 1. 80287 Block Diagram

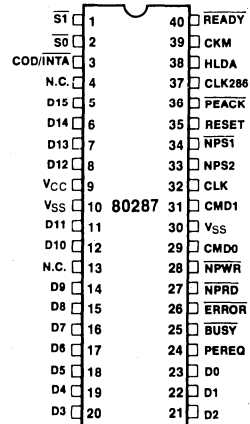

NOTE:
N.C. PINS MUST NOT BE CONNECTED.

Figure 2. 80287 Pin Configuration

Intel Corporation Assumes No Responsibility for the Use of Any Circuitry Other Than Circuitry Embodied in an Intel Product. No Other Circuit Patent Licenses are Implied.
OCTOBER 1983

© INTEL CORPORATION, 1983.

ORDER NUMBER: 210920-002

Table 1. 80287 Pin Description

| Symbols | Type | Name and Function |
|---|------|--|
| CLK | I | Clock input: this clock provides the basic timing for internal 80287 operations. Special MOS level inputs are required. The 82284 or 8284A CLK outputs are compatible to this input. |
| CKM | I | Clock Mode signal: indicates whether CLK input is to be divided by 3 or used directly. A HIGH input will cause CLK to be used directly. This input may be connected to V_{CC} or V_{SS} as appropriate. This input must be either HIGH or LOW 20 CLK cycles before RESET goes LOW. |
| RESET | I | System Reset: causes the 80287 to immediately terminate its present activity and enter a dormant state. RESET is required to be HIGH for more than 4 80287 CLK cycles. For proper initialization the HIGH-LOW transition must occur no sooner than 50 μ s after V_{CC} and CLK meet their D.C. and A.C. specifications. |
| D15-D0 | I/O | Data: 16-bit bidirectional data bus. Inputs to these pins may be applied asynchronous to the 80287 clock. |
| $\overline{\text{BUSY}}$ | O | Busy status: asserted by the 80287 to indicate that it is currently executing a command. |
| $\overline{\text{ERROR}}$ | O | Error status: reflects the ES bit of the status word. This signal indicates that an unmasked error condition exists. |
| PEREQ | O | Processor Extension Data Channel operand transfer request: a HIGH on this output indicates that the 80287 is ready to transfer data. PEREQ will be disabled upon assertion of $\overline{\text{PEACK}}$ or upon actual data transfer, whichever occurs first, if no more transfers are required. |
| $\overline{\text{PEACK}}$ | I | Processor Extension Data Channel operand transfer ACKnowledge: acknowledges that the request signal (PEREQ) has been recognized. Will cause the request (PEREQ) to be withdrawn in case there are no more transfers required. PEACK may be asynchronous to the 80287 clock. |
| $\overline{\text{NPRD}}$ | I | Numeric Processor Read: Enables transfer of data from the 80287. This input may be asynchronous to the 80287 clock. |
| $\overline{\text{NPWR}}$ | I | Numeric Processor Write: Enables transfer of data to the 80287. This input may be asynchronous to the 80287 clock. |
| $\overline{\text{NPS1}}$, $\overline{\text{NPS2}}$ | I | Numeric Processor Selects: indicate the CPU is performing an ESCAPE instruction. Concurrent assertion of these signals (i.e., $\overline{\text{NPST}}$ is LOW and NPS2 is HIGH) enables the 80287 to perform floating point instructions. No data transfers involving the 80287 will occur unless the device is selected via these lines. These inputs may be asynchronous to the 80287 clock. |
| CMD1, CMD0 | I | Command lines: These, along with select inputs, allow the CPU to direct the operation of the 80287. These inputs may be asynchronous to the 80287 clock. |

Table 1. 80287 Pin Description (cont.)

| Symbols | Type | Name and Function |
|--|------|---|
| CLK286 | I | CPU Clock: This input provides a sampling edge for the 80287 inputs $\overline{S1}$, $\overline{S0}$, $\overline{COD/INTA}$, \overline{READY} , and HLDA. It must be connected to the 80286 CLK input. |
| $\overline{S1}$, $\overline{S0}$ $\overline{COD/INTA}$ | I | Status: These inputs must be connected to the corresponding 80286 pins. |
| HLDA | I | Hold Acknowledge: This input informs the 80287 when the 80286 controls the local bus. It must be connected to the 80286 HLDA output. |
| \overline{READY} | I | Ready: The end of a bus cycle is signaled by this input. It must be connected to the 80286 \overline{READY} input. |
| V _{SS} | I | System ground, both pins must be connected to ground. |
| V _{CC} | I | +5V supply |

FUNCTIONAL DESCRIPTION

The 80287 Numeric Processor Extension (NPX) provides arithmetic instructions for a variety of numeric data types in iAPX 286/20 systems. It also executes numerous built-in transcendental functions (e.g., tangent and log functions). The 80287 executes instructions in parallel with a 80286. It

effectively extends the register and instruction set of an iAPX 286/10 system for existing iAPX 286 data types and adds several new data types as well. Figure 3 presents the program visible register model of the iAPX 286/20. Essentially, the 80287 can be treated as an additional resource or an extension to the iAPX 286/10 that can be used as a single unified system, the iAPX 286/20.

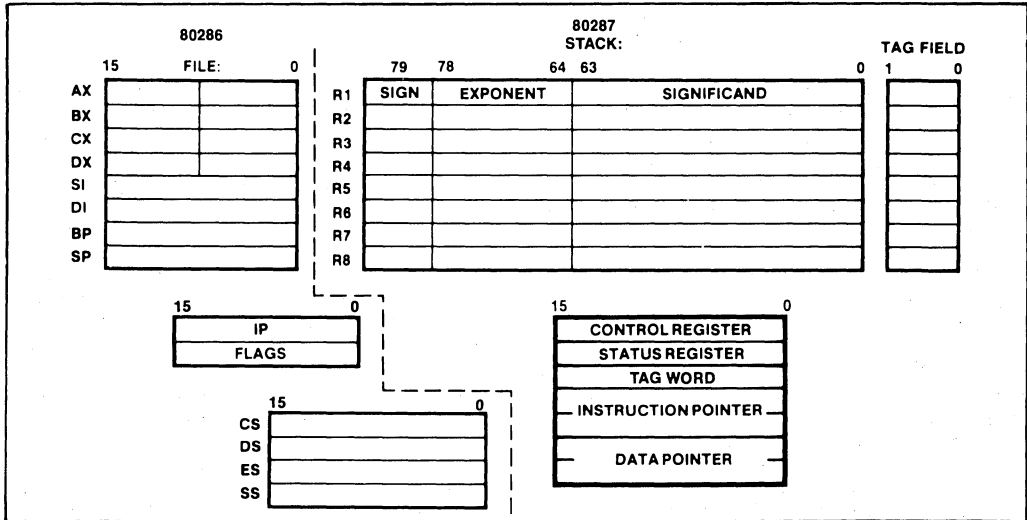


Figure 3. iAPX 286/20 Architecture

The 80287 has two operating modes similar to the two modes of the 80286. When reset, 80287 is in the real address mode. It can be placed in the protected virtual address mode by executing the SETPM ESC instruction. The 80287 cannot be switched back to the real address mode except by reset. In the real address mode, the iAPX 286/20 is completely software compatible with iAPX 86/20, 88/20.

Once in protected mode, all references to memory for numerics data or status information, obey the iAPX 286 memory management and protection rules giving a fully protected extension of the 80286 CPU. In the protected mode, iAPX 286/20 numerics software is also completely compatible with iAPX 86/20 and iAPX 88/20.

SYSTEM CONFIGURATION

As a processor extension to an 80286, the 80287 can be connected to the CPU as shown in Figure 4. The data channel control signals (PEREQ, PEACK), the BUSY signal and the NPRD, NPWR signals, allow the NPX to receive instructions and data from the CPU. When in the protected mode, all information received by the NPX is validated by the 80286 memory management and protection unit. Once started, the 80287 can process in parallel with and independent of the host CPU. When the NPX detects an error or exception, it will indicate this to the CPU by asserting the ERROR signal.

The NPX uses the processor extension request and acknowledge pins of the 80286 CPU to implement data transfers with memory under the protection model of the CPU. The full virtual and physical address space of the 80286 is available. Data for the 80287 in memory is addressed and represented in the same manner as for an 8087.

The 80287 can operate either directly from the CPU clock or with a dedicated clock. For operation with the CPU clock (CKM=0), the 80287 works at one-third the frequency of the system clock (i.e., for an 8 MHz 80286, the 16 MHz system clock is divided down to 5.3 MHz). The 80287 provides a capability to internally divide the CPU clock by three to produce the required internal clock (33% duty cycle). To use a higher performance 80287 (8 MHz), an 8284A clock driver and appropriate crystal may be used to directly drive the 80287 with a 1/3 duty cycle clock on the CLK input (CKM=1).

HARDWARE INTERFACE

Communication of instructions and data operands between the 80286 and 80287 is handled by the CMD0, CMD1, NPST, NPS2, NPRD, and NPWR signals. I/O port addresses 00F8H, 00FAH, and 00FCH are used by the 80286 for this communication. When any of these addresses are used, the NPST input must be LOW and NPS2 input HIGH. The TORC and TOWC outputs of the 82288 identify I/O space transceivers (see Figure 4). CMD0 should be connected to latched 80286 A1 and CMD1 should be connected to latched 80286 A2. The ST, S0, COD/INTA, READY, HLDA, and CLK pins of the 80286 are connected to the same named pins on the 80287.

I/O ports 00F8H to 00FFH are reserved for the 80286/80287 interface. To guarantee correct operation of the 80287, programs must not perform any I/O operations to these ports.

The PEREQ, PEACK, BUSY, and ERROR signals of the 80287 are connected to the same-named 80286 input. The data pins of the 80287 should be directly connected to the 80286 data bus. Note that all bus drivers connected to the 80286 local bus must be inhibited when the 80286 reads from the 80287. The use of COD/INTA and M/I0 in the decoder prevents INTA bus cycles from disabling the data transceivers.

PROGRAMMING INTERFACE

Table 2 lists the seven data types the 80287 supports and presents the format for each type. These values are stored in memory with the least significant digits at the lowest memory address. Programs retrieve these values by generating the lowest address. All values should start at even addresses for maximum system performance.

Internally the 80287 holds all numbers in the temporary real format. Load instructions automatically convert operands represented in memory as 16-, 32-, or 64-bit integers, 32- or 64-bit floating point number or 18-digit packed BCD numbers into temporary real format. Store instructions perform the reverse type conversion.

80287 computations use the processor's register stack. These eight 80-bit registers provide the equivalent capacity of 40 16-bit registers. The 80287 register set can be accessed as a stack, with

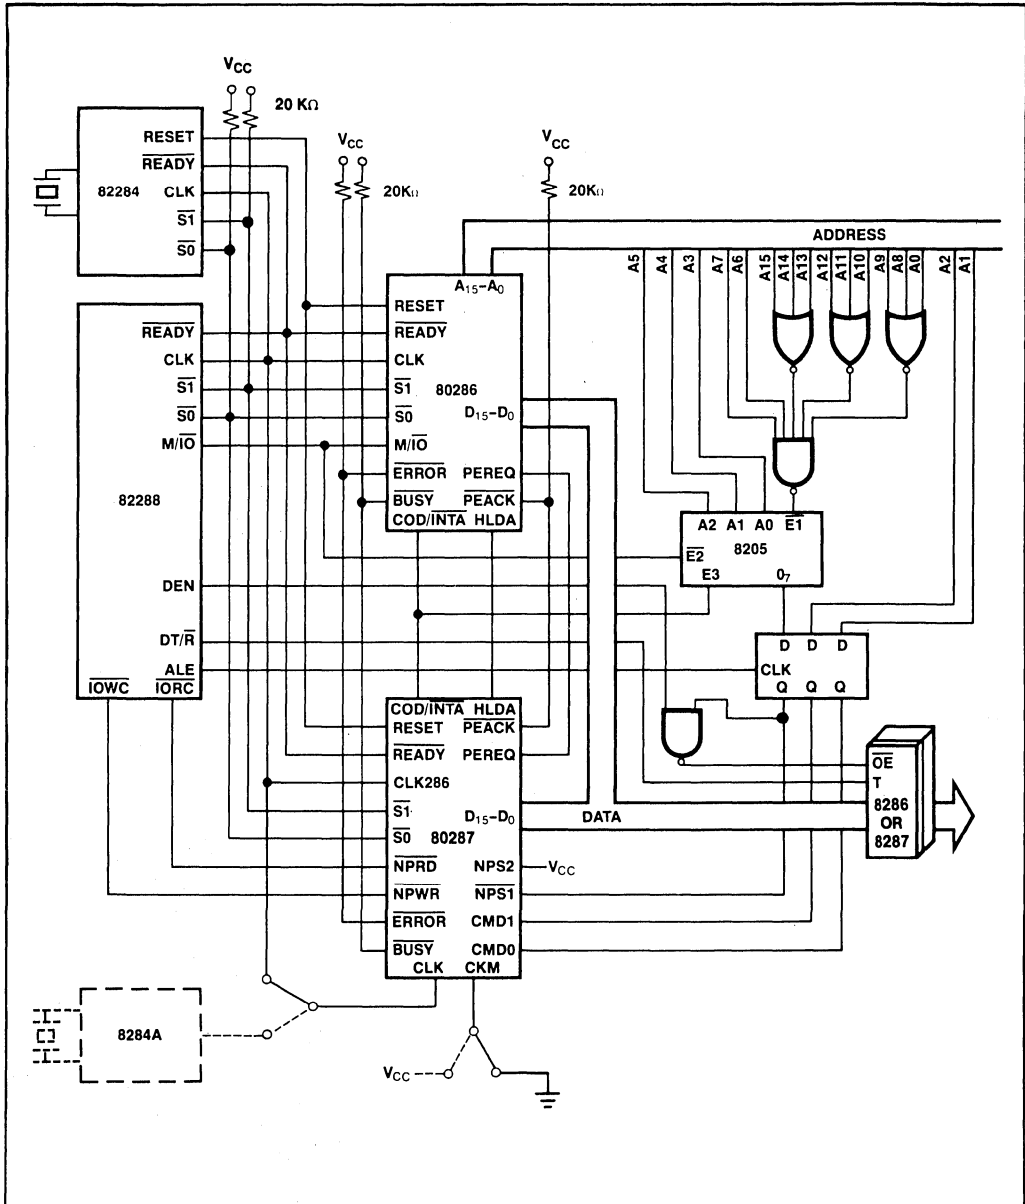


Figure 4. iAPX 286/20 System Configuration

Table 2. 80287 Datatype Representation in Memory

| Data Formats | Range | Precision | Most Significant Byte | | | | | | | | | | | | HIGHEST ADDRESSED BYTE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------|-----------------|-----------|--------------------------------|---|---|---|---|---|---|---|---|---|---|---|------------------------|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | 7 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Word Integer | 10^4 | 16 Bits | S MAGNITUDE (TWO'S COMPLEMENT) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Short Integer | 10^9 | 32 Bits | S MAGNITUDE (TWO'S COMPLEMENT) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Long Integer | 10^{19} | 64 Bits | S MAGNITUDE (TWO'S COMPLEMENT) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Packed BCD | 10^{18} | 18 Digits | S X MAGNITUDE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Short Real | $10^{\pm 38}$ | 24 Bits | S BIASED EXPONENT SIGNIFICAND | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Long Real | $10^{\pm 308}$ | 53 Bits | S BIASED EXPONENT SIGNIFICAND | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Temporary Real | $10^{\pm 4932}$ | 64 Bits | S BIASED EXPONENT SIGNIFICAND | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

NOTES:

- (1) S = Sign bit (0 = positive, 1 = negative)
- (2) d_n = Decimal digit (two per byte)
- (3) X = Bits have no significance; 8087 ignores when loading, zeros when storing.
- (4) Δ = Position of implicit binary point
- (5) I = Integer bit of significand; stored in temporary real, implicit in short and long real

- (6) Exponent Bias (normalized values):
 Short Real: 127 (7FH)
 Long Real: 1023 (3FFH)
 Temporary Real: 16383 (3FFFH)
- (7) Packed BCD: $(-1)^S(D_{17} \dots D_0)$
- (8) Real: $(-1)^S(2^{E-BIAS})(F_0 F_1 \dots)$

instructions operating on the top one or two stack elements, or as a fixed register set, with instructions operating on explicitly designated registers.

Table 6 lists the 80287's instructions by class. No special programming tools are necessary to use the 80287 since all new instructions and data types are directly supported by the iAPX 286 assembler

and appropriate high level languages. All iAPX 86/88 development tools which support the 8087 can also be used to develop software for the iAPX 286/20 in real address mode.

Table 3 gives the execution times of some typical numeric instructions.

Table 3. Execution Time for Selected 80287 Instructions

| Floating Point Instruction | Approximate Execution Time (μ s) |
|-------------------------------|---------------------------------------|
| | 80287 (5 MHz Operation) |
| Add/Subtract | 14/18 |
| Multiply (single precision) | 19 |
| Multiply (extended precision) | 27 |
| Divide | 39 |
| Compare | 9 |
| Load (double precision) | 10 |
| Store (double precision) | 21 |
| Square Root | 36 |
| Tangent | 90 |
| Exponentiation | 100 |

SOFTWARE INTERFACE

The iAPX 286/20 is programmed as a single processor. All communication between the 80286 and the 80287 is transparent to software. The CPU automatically controls the 80287 whenever a numeric instruction is executed. All memory addressing modes, physical memory, and virtual memory of the CPU are available for use by the NPX.

Since the NPX operates in parallel with the CPU, any errors detected by the NPX may be reported after the CPU has executed the ESCAPE instruction which caused it. To allow identification of the failing numeric instruction, the NPX contains two pointer registers which identify the address of the failing numeric instruction and the numeric memory operand if appropriate for the instruction encountering this error.

INTERRUPT DESCRIPTION

Several interrupts of the iAPX 286 are used to report exceptional conditions while executing numeric programs in either real or protected mode. The interrupts and their functions are shown in Table 4.

PROCESSOR ARCHITECTURE

As shown in Figure 1, the NPX is internally divided into two processing elements, the bus interface unit (BIU) and the numeric execution unit (NEU). The NEU executes all numeric instructions, while the BIU receives and decodes instructions, requests operand transfers to and from memory and executes processor control instructions. The two units are able to operate independently of one another allowing the BIU to maintain asynchronous communication with the CPU while the NEU is busy processing a numeric instruction.

BUS INTERFACE UNIT

The BIU decodes the ESC instruction executed by the CPU. If the ESC code defines a math instruction, the BIU transmits the formatted instruction to the NEU. If the ESC code defines an administrative instruction, the BIU executes it independently of the NEU. The parallel operation of the NPX with the CPU is normally transparent to the user. The BIU generates the BUSY and ERROR signals for 80826/80287 processor synchronization and error notification, respectively.

The 80287 executes a single numeric instruction at a time. When executing most ESC instructions, the

Table 4. 80286 Interrupt Vectors Reserved for NPX

| Interrupt Number | Interrupt Function |
|------------------|--|
| 7 | An ESC instruction was encountered when EM or TS of the 80286 MSW was set. EM=1 indicates that software emulation of the instruction is required. When TS is set, either an ESC or WAIT instruction will cause interrupt 7. This indicates that the current NPX context may not belong to the current task. |
| 9 | The second or subsequent words of a numeric operand in memory exceeded a segment's limit. This interrupt occurs after executing an ESC instruction. The saved return address will not point at the numeric instruction causing this interrupt. After processing the addressing error, the iAPX 286 program can be restarted at the return address with IRET. The address of the failing numeric instruction and numeric operand are saved in the 80287. An interrupt handler for this interrupt <i>must</i> execute FNINIT before any other ESC or WAIT instruction. |
| 13 | The starting address of a numeric operand is not in the segment's limit. The return address will point at the ESC instruction, including prefixes, causing this error. The 80287 has not executed this instruction. The instruction and data address in 80287 refer to a previous, correctly executed, instruction. |
| 16 | The previous numeric instruction caused an unmasked numeric error. The address of the faulty numeric instruction or numeric data operand is stored in the 80287. Only ESC or WAIT instructions can cause this interrupt. The 80286 return address will point at a WAIT or ESC instruction, including prefixes, which may be restarted after clearing the error condition in the NPX. |

80286 tests the BUSY pin and waits until the 80287 indicates that it is not busy before initiating the command. Once initiated, the 80286 continues program execution while the 80287 executes the ESC instruction. In iAPX 86/20 systems, this synchronization is achieved by placing a WAIT instruction before an ESC instruction. For most ESC instructions, the iAPX 286/20 does not require a WAIT instruction before the ESC opcode. However, the iAPX 286/20 will operate correctly with these WAIT instructions. In all cases, a WAIT or ESC instruction should be inserted after any 80287 store to memory (except FSTSW and FSTCW) or load from memory (except FLDENV or FRSTOR) before the 80286 reads or changes the value to be sure the numeric value has already been written or read by the NPX.

Data transfers between memory and the 80287, when needed, are controlled by the PEREQ, PEACK, NPRD, NPWR, NPST1, NPS2 signals. The 80286 does the actual data transfer with memory through its processor extension data channel. Numeric data transfers with memory performed by the 80286 use the same timing as any other bus

cycle. Control signals for the 80287 are generated by the 80286 as shown in Figure 4, and meet the timing requirements shown in the AC requirements section.

NUMERIC EXECUTION UNIT

The NEU executes all instructions that involve the register stack; these include arithmetic, logical, transcendental, constant and data transfer instructions. The data path in the NEU is 84 bits wide (68 significant bits, 15 exponent bits and a sign bit) which allows internal operand transfers to be performed at very high speeds.

When the NEU begins executing an instruction, it activates the BIU BUSY signal. This signal is used in conjunction with the CPU WAIT instruction or automatically with most of the ESC instructions to synchronize both processors.

REGISTER SET

The 80287 register set is shown in Figure 5. Each of the eight data registers in the 80287's register stack

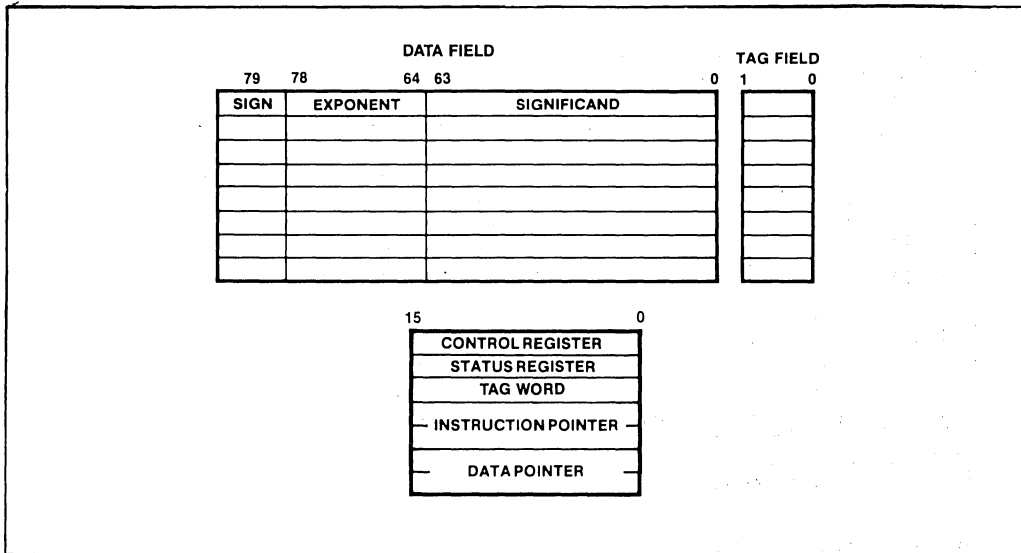


Figure 5. 80287 Register Set

is 80 bits wide and is divided into "fields" corresponding to the NPX's temporary real data type.

At a given point in time the ST field in the status word identifies the current top-of-stack register. A "push" operation decrements ST by 1 and loads a value into the new top register. A "pop" operation stores the value from the current top register and then increments ST by 1. Like 80286 stacks in memory, the 80287 register stack grows "down" toward lower-addressed registers.

Instructions may address the data registers either implicitly or explicitly. Many instructions operate on the register at the Stack Top. These instructions implicitly address the register pointed to by the ST. Other instructions allow the programmer to explicitly specify the register which is to be used. This explicit register addressing is also "top-relative."

Bits 14-12 of the status word points to the 80287 register that is the current top-of-stack (ST) as described above. Figure 6 shows the six error flags in bits 5-0 of the status word. Bits 5-0 are set to indicate that the NEU has detected an exception while executing an instruction. The section on exception handling explains how they are set and used.

The instructions FSTSW, FSTSW AX, FSTENV, and FSAVE which store the status word are executed exclusively by the BIU and do not set the busy bit themselves or require the Busy bit be cleared in order to be executed.

The four numeric condition code bits (C₀-C₃) are similar to the flags in a CPU: instructions that perform arithmetic operations update these bits to reflect the outcome of NPX operations. The effect of these instructions on the condition code bits is summarized in Tables 5a and 5b.

Bits 14-12 of the status word point to the 80287 register that is the current top-of-stack (ST) as described above. Figure 6 shows the six error flags in bits 5-0 of the status word. Bits 5-0 are set to indicate that the NEU has detected an exception while executing an instruction. The section on exception handling explains how they are set and used.

Bit 7 is the error summary status bit. This bit is set if any unmasked exception bit is set and cleared otherwise. If this bit is set, the ERROR signal is asserted.

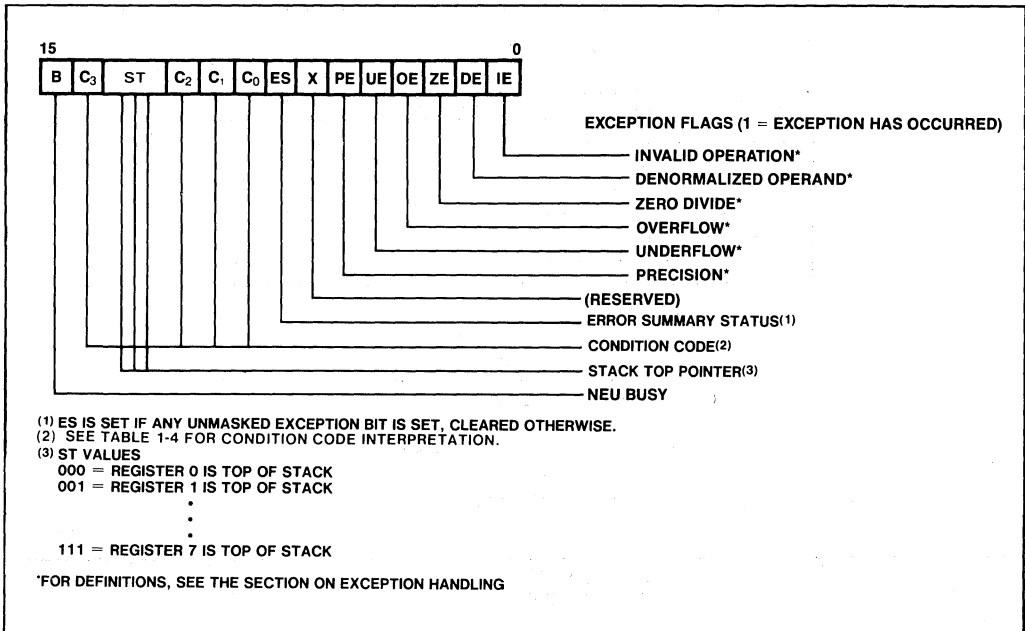


Figure 6. 80287 Status Word

TAG WORD

The tag word marks the content of each register as shown in Figure 7. The principal function of the tag word is to optimize the NPX's performance. The eight two-bit tags in the tag word can be used, however, to interpret the contents of 80287 registers.

INSTRUCTION AND DATA POINTERS

The instruction and data pointers (See Figures 8a and 8b) are provided for user-written error handlers. Whenever the 80287 executes a new instruction, the BIU saves the instruction address, the operand address (if present) and the instruction opcode. 80287 instructions can store this data into memory.

The instruction and data pointers appear in one of two formats depending on the operating mode of the 80287. In real mode, these values are the 20-bit physical address and 11-bit opcode formatted like the 8087. In protected mode, these values are the 32-bit virtual addresses used by the program

which executed an ESC instruction. The same FLDENV/FSTENV/FSAVE/FRSTOR instructions as those of the 8087 are used to transfer these values between the 80287 registers and memory.

The saved instruction address in the 80287 will point at any prefixes which preceded the instruction. This is different than in the 8087 which only pointed at the ESCAPE instruction opcode.

CONTROL WORD

The NPX provides several processing options which are selected by loading a word from memory into the control word. Figure 9 shows the format and encoding of fields in the control word.

The low order byte of this control word configures the 80287 error and exception masking. Bits 5-0 of the control word contain individual masks for each of the six exceptions that the 80287 recognizes. The high order byte of the control word configures the 80287 operating mode including precision,

Table 5a. Condition Code Interpretation

| Instruction Type | C ₃ | C ₂ | C ₁ | C ₀ | Interpretation |
|------------------|----------------|----------------|----------------|----------------|---|
| Compare, Test | 0 | 0 | X | 0 | ST > Source or 0 (FTST) |
| | 0 | 0 | X | 1 | ST < Source or 0 (FTST) |
| | 1 | 0 | X | 0 | ST = Source or 0 (FTST) |
| | 1 | 1 | X | 1 | ST is not comparable |
| Remainder | Q ₁ | 0 | Q ₀ | Q ₂ | Complete reduction with three low bits of quotient (See Table 5b) |
| | U | 1 | U | U | Incomplete Reduction |
| Examine | 0 | 0 | 0 | 0 | Valid, positive unnormalized |
| | 0 | 0 | 0 | 1 | Invalid, positive, exponent = 0 |
| | 0 | 0 | 1 | 0 | Valid, negative, unnormalized |
| | 0 | 0 | 1 | 1 | Invalid, negative, exponent = 0 |
| | 0 | 1 | 0 | 0 | Valid, positive, normalized |
| | 0 | 1 | 0 | 1 | Infinity, positive |
| | 0 | 1 | 1 | 0 | Valid, negative, normalized |
| | 0 | 1 | 1 | 1 | Infinity, negative |
| | 1 | 0 | 0 | 0 | Zero, positive |
| | 1 | 0 | 0 | 1 | Empty |
| | 1 | 0 | 1 | 0 | Zero, negative |
| | 1 | 0 | 1 | 1 | Empty |
| | 1 | 1 | 0 | 0 | Invalid, positive, exponent = 0 |
| | 1 | 1 | 0 | 1 | Empty |
| | 1 | 1 | 1 | 0 | Invalid, negative, exponent = 0 |
| | 1 | 1 | 1 | 1 | Empty |

NOTES:

1. ST = Top of stack
2. X = value is not affected by instruction
3. U = value is undefined following instruction
4. Q_n = Quotient bit n

Table 5b. Condition Code Interpretation after FPREM Instruction As a Function of Dividend Value

| Dividend Range | Q ₂ | Q ₁ | Q ₀ |
|------------------------|----------------|----------------|----------------|
| Dividend < 2 * Modulus | C ₃ | C ₁ | Q ₀ |
| Dividend < 4 * Modulus | C ₃ | Q ₁ | Q ₀ |
| Dividend ≥ 4 * Modulus | Q ₂ | Q ₁ | Q ₀ |

NOTE:

1. Previous value of indicated bit, not affected by FPREM instruction execution.

rounding, and infinity control. The precision control bits (bits 9–8) can be used to set the 80287 internal operating precision at less than the default of temporary real (80-bit) precision. This can be useful in providing compatibility with the early generation arithmetic processors of smaller precision than the 80287. The rounding control bits (bits 11–10) provide for directed rounding and true chop as well as the unbiased round to nearest even mode specified in the IEEE standard. Control over closure of the number space at infinity is also provided (either affine closure: ±∞, or projective closure: ∞, is treated as unsigned, may be specified).

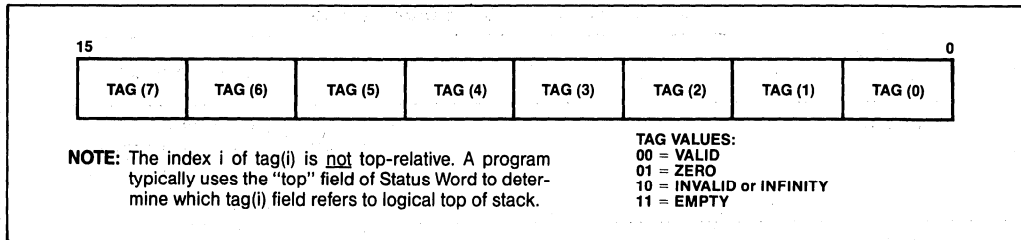


Figure 7. 80287 Tag Word

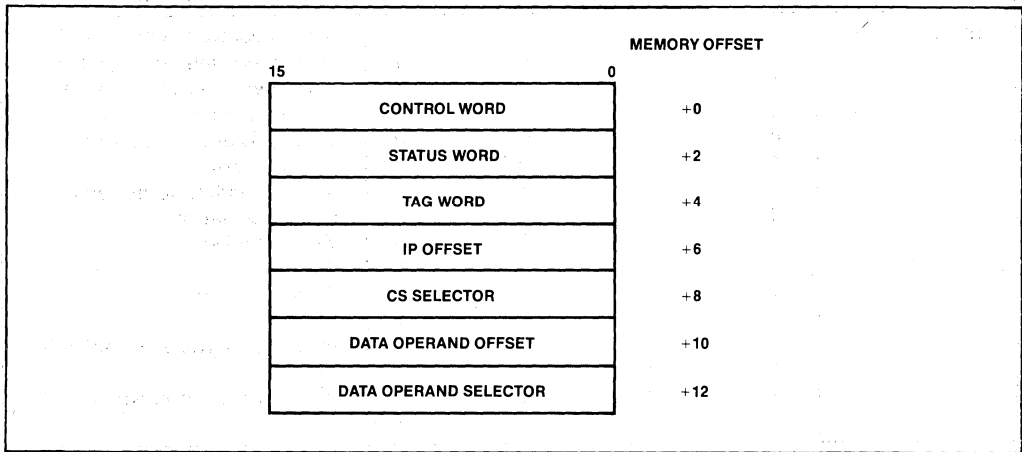


Figure 8a. Protected Mode 80287 Instruction and Data Pointer Image in Memory

EXCEPTION HANDLING

The 80287 detects six different exception conditions that can occur during instruction execution. Any or all exceptions will cause the assertion of external ERROR signal and ES bit of the Status Word if the appropriate exception masks are not set.

The exceptions that the 80287 detects and the 'default' procedures that will be carried out if the exception is masked, are as follows:

Invalid Operation: Stack overflow, stack underflow, indeterminate form (0/0, ∞, -∞, etc) or the use of a Non-Number (NaN) as an operand. An exponent value of all ones and non-zero significand is reserved to identify NaNs. If this exception is masked, the 80287 default response is to generate a specific NaN called

INDEFINITE, or to propagate already existing NaNs as the calculation result.

Overflow: The result is too large in magnitude to fit the specified format. The 80287 will generate an encoding for infinity if this exception is masked.

Zero Divisor: The divisor is zero while the dividend is a non-infinite, non-zero number. Again, the 80287 will generate an encoding for infinity if this exception is masked.

Underflow: The result is non-zero but too small in magnitude to fit in the specified format. If this exception is masked the 80287 will denormalize (shift right) the fraction until the exponent is in range. The process is called gradual underflow.

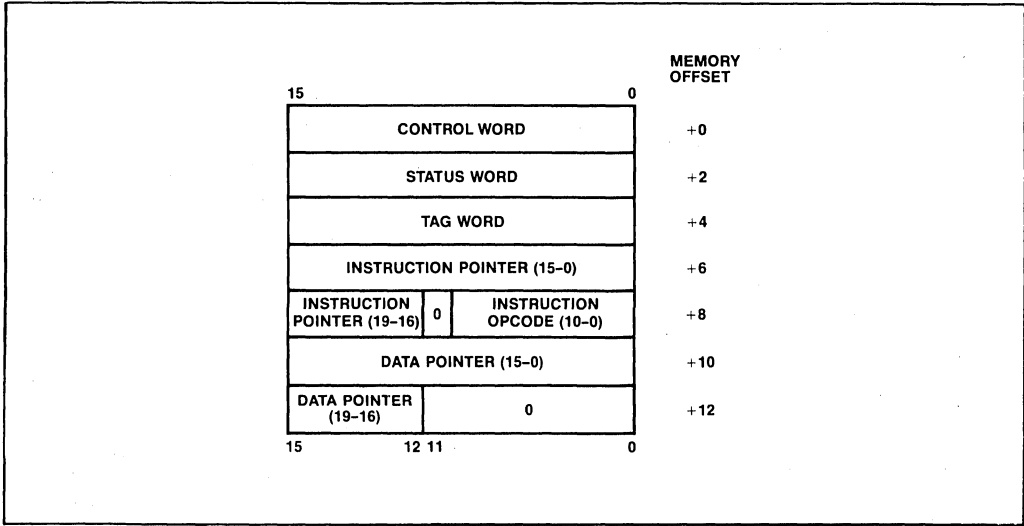


Figure 8b. Real Mode 80287 Instruction and Data Pointer Image in Memory

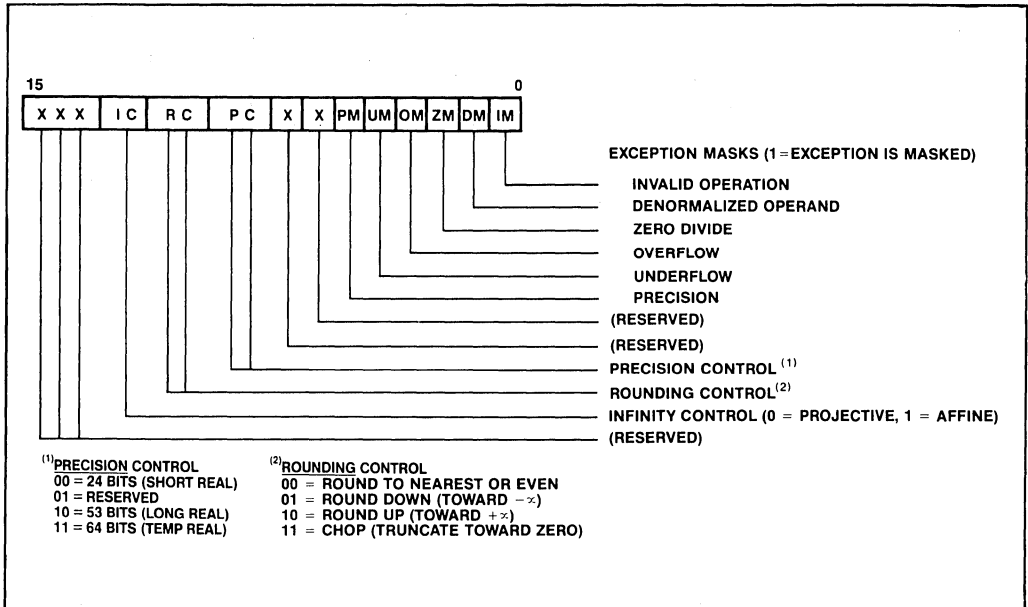


Figure 9. 80287 Control Word

Denormalized Operand: At least one of the operands is denormalized; it has the smallest exponent but a non-zero significand. Normal processing continues if this exception is masked off.

Inexact Result: The true result is not exactly representable in the specified format, the result is rounded according to the rounding mode, and this flag is set. If this exception is masked, processing will simply continue.

If the error is not masked, the corresponding error bit and the error status bit (ES) in the control word will be set, and the ERROR output signal will be asserted. If the CPU attempts to execute another ESC or WAIT instruction, exception 7 will occur.

The error condition must be resolved via an interrupt service routine. The 80287 saves the address of the floating point instruction causing the error as well as the address of the lowest memory location of any memory operand required by that instruction.

iAPX 86/20 COMPATIBILITY:

iAPX 286/20 supports portability of iAPX 86/20 programs when it is in the real address mode. However, because of differences in the numeric error handling techniques, error handling routines may need to be changed. The differences between an iAPX 286/20 and iAPX 86/20 are:

1. The NPX error signal does not pass through an interrupt controller (8087 INT signal does).

Therefore, any interrupt controller oriented instructions for the iAPX 86/20 may have to be deleted.

2. Interrupt vector 16 must point at the numeric error handler routine.
3. The saved floating point instruction address in the 80287 includes any leading prefixes before the ESCAPE opcode. The corresponding saved address of the 8087 does not include leading prefixes.
4. In protected mode, the format of the saved instruction and operand pointers is different than for the 8087. The instruction opcode is not saved—it must be read from memory if needed.
5. Interrupt 7 will occur when executing ESC instructions with either TS or EM of MSW=1. If TS of MSW=1 then WAIT will also cause interrupt 7. An interrupt handler should be added to handle this situation.
6. Interrupt 9 will occur if the second or subsequent words of a floating point operand fall outside a segment's size. Interrupt 13 will occur if the starting address of a numeric operand falls outside a segment's size. An interrupt handler should be added to report these programming errors.

In the protected mode, iAPX 86/20 application code can be directly ported via recompilation if the 286 memory protection rules are not violated.

ABSOLUTE MAXIMUM RATINGS*

Ambient Temperature Under Bias . . . 0°C to 70°C
 Storage Temperature -65°C to +150°C
 Voltage on Any Pin with
 Respect to Ground -1.0 to +7V
 Power Dissipation 3.0 Watt

**NOTICE: Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

D.C. CHARACTERISTICS $T_A = 0^\circ\text{C to } 70^\circ\text{C}$, $V_{CC} = 5\text{V, } +/-5\%$

5 MHz

| Symbol | Parameter | -3 Min | -3 max | Unit | Test Conditions |
|-----------|--|--------|---------------|---------------|--|
| V_{IL} | Input LOW Voltage | -5 | .8 | V | |
| V_{IH} | Input HIGH Voltage | 2.0 | $V_{CC} + .5$ | V | |
| V_{ILC} | Clock Input LOW Voltage CKM = 1: CKM = 0: | -5 | .8 | V | |
| | | -5 | .6 | V | |
| V_{IHC} | Clock Input HIGH Voltage CKM = 1: CKM = 0: | 2.0 | $V_{CC} + 1$ | V | |
| | | 3.8 | $V_{CC} + 1$ | V | |
| V_{OL} | Output LOW Voltage | | .45 | V | $I_{OL} = 3.0 \text{ mA}$ |
| V_{OH} | Output HIGH Voltage | 2.4 | | V | $I_{OH} = -400 \mu\text{A}$ |
| I_{LI} | Input Leakage Current | | ± 10 | μA | $0\text{V} \leq V_{IN} \leq V_{CC}$ |
| I_{LO} | Output Leakage Current | | ± 10 | μA | $.45\text{V} \leq V_{OUT} \leq V_{CC}$ |
| I_{CC} | Power Supply Current | | 475 | mA | |
| C_{IN} | Input Capacitance | | 10 | pF | $F_C = 1 \text{ MHz}$ |
| C_O | Input/Output Capacitance (D0-D15) | | 20 | pF | $F_C = 1 \text{ MHz}$ |
| C_{CLK} | CLK Capacitance | | 12 | pF | $F_C = 1 \text{ MHz}$ |

A.C. CHARACTERISTICS ($T_A = 0^\circ\text{C}$ to 70°C , $V_{CC} + 5V, \pm 5\%$)**TIMING REQUIREMENTS**

A.C. timings are referenced to 0.8V and 2.0V points on signals unless otherwise noted.

5 MHz

| Symbol | Parameter | -3 Min | -3 max | Unit | Test Conditions |
|----------------------------|--|-------------|------------|----------|--------------------------|
| T_{CLCL} | CLK Period CKM = 1: CKM = 0: | 200 62.5 | 500 250 | ns ns | |
| T_{CLCH} | CLK LOW Time CKM = 1: CKM = 0: | 118 15 | 230 | ns ns | At 0.8V At 0.6V |
| T_{CHCL} | CLK HIGH Time CKM = 1: CKM = 0: | 69 20 | 235 | ns ns | At 2.0V At 3.8V |
| T_{CH1CH2} | CLK Rise Time | . | 10 | ns | 1.0V to 3.5V if CKM = 1. |
| T_{CL2CL1} | CLK Fall Time | . | 10 | ns | 3.5V to 1.0V if CKM = 1. |
| T_{DVWH} | Data Setup to \overline{NPWR} Inactive | 75 | . | ns | |
| T_{WHDX} | Data Hold from \overline{NPWR} Inactive | 30 | . | ns | |
| T_{WLWH} , T_{RLRH} | \overline{NPWR} , \overline{NPRD} Active Time | 95 | . | ns | At 0.8V |
| T_{AVRL} , T_{AVWL} | Command Valid to \overline{NPWR} or \overline{NPRD} Active | 0 | . | ns | |
| T_{MHRL} | Minimum Delay from PEREQ Active to \overline{NPRD} Active | 130 | . | ns | |
| T_{KCLK} | \overline{PEACK} Active Time | 85 | . | ns | At 0.8V |
| T_{KHKL} | \overline{PEACK} Inactive Time | 250 | . | ns | At 2.0V |
| T_{KHCH} | \overline{PEACK} Inactive to \overline{NPWR} , \overline{NPRD} Inactive | 50 | . | ns | |
| T_{CHKL} | \overline{NPWR} , \overline{NPRD} Inactive to \overline{PEACK} Active | -30 | . | ns | |
| T_{WHAX} , T_{RHAX} | Command Hold from \overline{NPWR} , \overline{NPRD} Inactive | 30 | . | ns | |
| T_{KLCL} | \overline{PEACK} Active Setup to \overline{NPWR} , \overline{NPRD} Active | 50 | . | ns | |
| T_{2CLCL} | CLK286 Period | 62.5 | . | ns | |
| T_{2CLCH} | CLK286 LOW Time | 15 | . | ns | At 0.8V |
| T_{2CHCL} | CLK286 HIGH Time | 20 | . | ns | At 2.0V |
| T_{2SVCL} | $\overline{S0}$, $\overline{S1}$ Setup Time to CLK286 | 22.5 | . | ns | |
| T_{2CLSH} | $\overline{S0}$, $\overline{S1}$ Hold Time from CLK286 | 0 | . | ns | |

A.C. CHARACTERISTICS, continued
TIMING REQUIREMENTS

5 MHz

| Symbol | Parameter | -3 Min | -3 max | Unit | Test Conditions |
|-------------|--|--------|--------|------|-----------------|
| T_{CIVCL} | COD/ \overline{INTA} Setup Time to CLK286 | 0 | . | ns | |
| T_{CLCIH} | COD/ \overline{INTA} Hold Time from CLK286 | 0 | . | ns | |
| T_{RVCL} | \overline{READY} Setup Time to CLK286 | 38.5 | . | ns | |
| $T_{CLR H}$ | \overline{READY} Hold Time from CLK286 | 25 | . | ns | |
| T_{HVCL} | HLDA Setup Time to CLK286 | 0 | . | ns | |
| T_{CLHH} | HLDA Hold Time from CLK286 | 0 | . | ns | |
| T_{IVCL} | \overline{NPWR} , \overline{NPRD} to CLK Setup Time | 70 | . | ns | NOTE 1 |
| T_{CLIH} | \overline{NPWR} , \overline{NPRD} from CLK Hold Time | 45 | . | ns | NOTE 1 |
| T_{RSCL} | RESET to CLK Setup Time | 20 | . | ns | NOTE 1 |
| T_{CLRS} | RESET from CLK Hold Time | 20 | . | ns | NOTE 1 |

A.C. CHARACTERISTICS,
TIMING RESPONSES



5 MHz

| Symbol | Parameter | -3 Min | -3 max | Unit | Test Conditions |
|------------|---|------------------------|--------|----------------------|--|
| T_{RHQZ} | \overline{NPRD} Inactive to Data Float | . | 37.5 | ns | NOTE 2 |
| T_{RLQV} | \overline{NPRD} Active to Data Valid | . | 60 | ns | NOTE 3 |
| T_{ILBH} | \overline{ERROR} Active to \overline{BUSY} Inactive | 100 | . | ns | NOTE 4 |
| T_{WLBV} | \overline{NPWR} Active to \overline{BUSY} Active | . | 100 | ns | NOTE 5 |
| T_{KLML} | \overline{PEACK} Active to \overline{PEREQ} Inactive | . | 127 | ns | NOTE 6 |
| T_{CMDI} | Command Inactive Time Write-to-Write Read-to-Read Write-to-Read Read-to-Write | 95 250 105 95 | . | ns ns ns ns | At 2.0V At 2.0V At 2.0V At 2.0V |
| T_{RHQH} | Data Hold from \overline{NPRD} Inactive | 5 | . | ns | NOTE 7 |



NOTES:

1. This is an asynchronous input. This specification is given for testing purposes only, to assure recognition at a specific CLK edge.
2. Float condition occurs when output current is less than I_{LO} on D0-D15.
3. D0-D15 loading: CL = 100pF.
4. \overline{BUSY} loading: CL = 100pF.
5. \overline{BUSY} loading: CL = 100pF.
6. On last data transfer of numeric instruction.
7. D0-D15 loading: CL = 100pF.

WAVEFORMS (cont.)

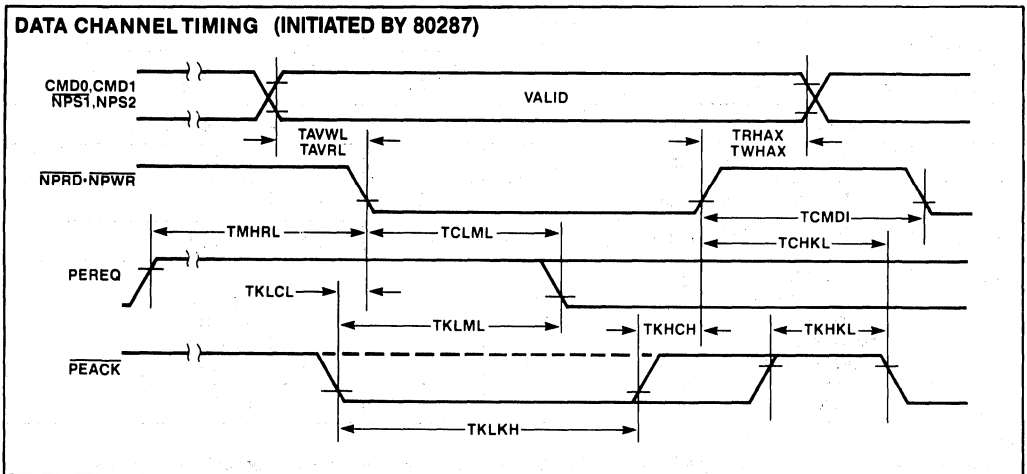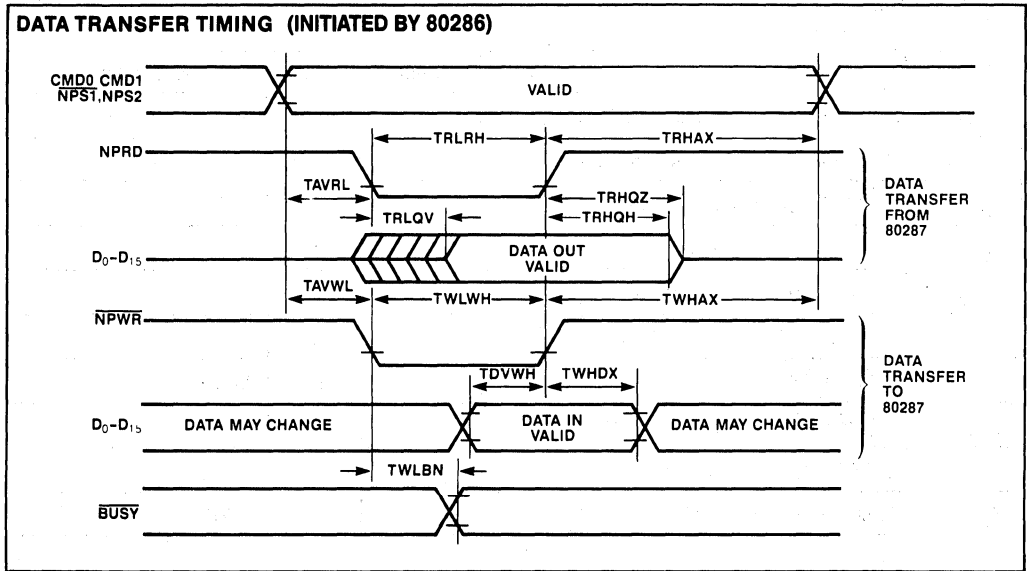

WAVEFORMS (cont.)

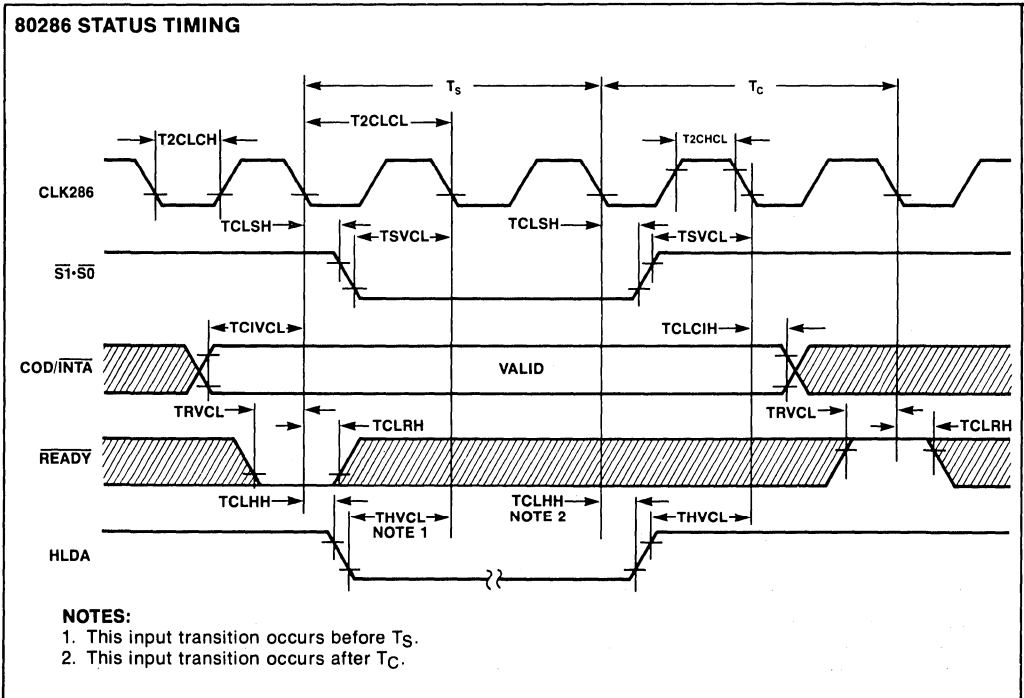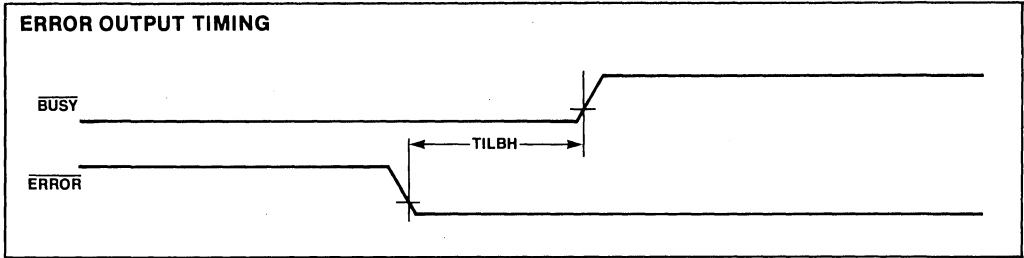

WAVEFORMS

(Reset, NPWR, NPRD are inputs asynchronous to CLK. Timing requirements on this page are given for testing purposes only, to assure recognition at a specific CLK edge.)

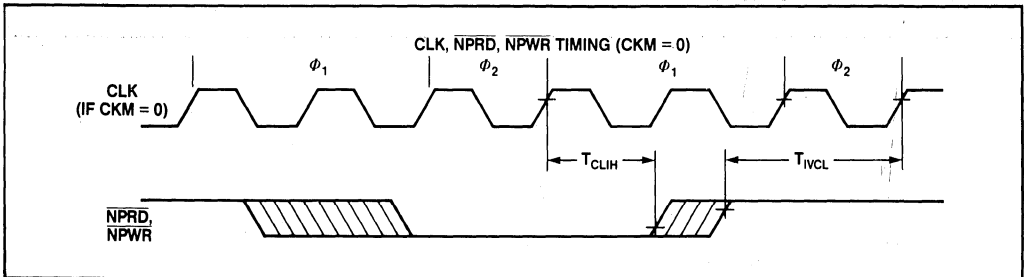
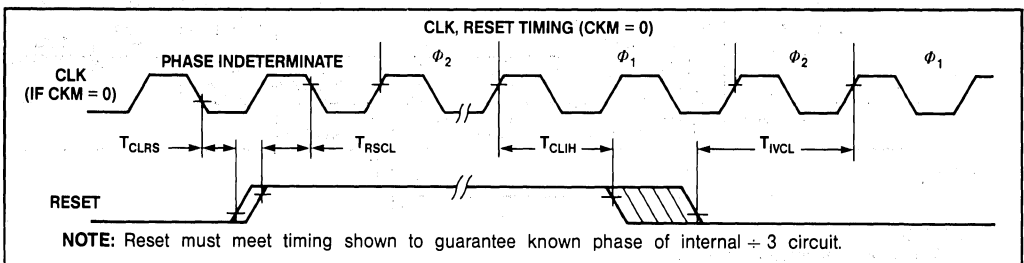
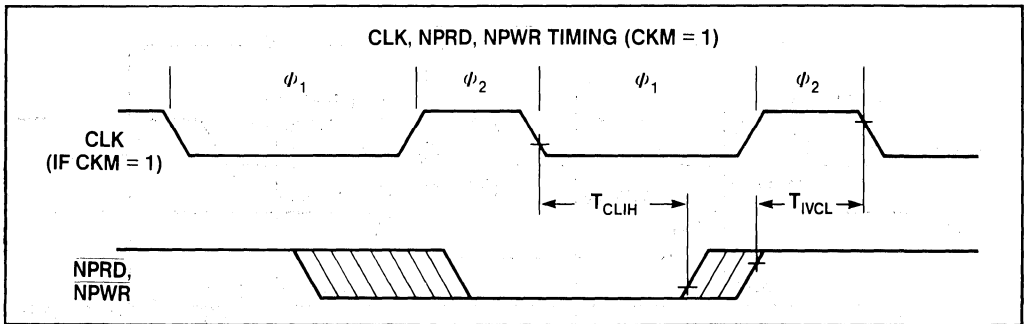
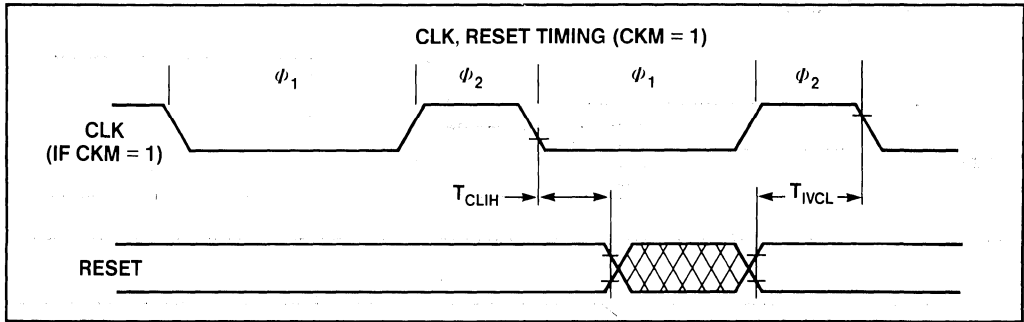


Table 6. 80287 Extensions to the 80286 Instruction Set

| Data Transfer | Optional 8,16 Bit Displacement | Clock Count Range | | | |
|--|--------------------------------------|-------------------|-------------------|----------------|-------------------|
| | | 32 Bit Real | 32 Bit Integer | 64 Bit Real | 16 Bit Integer |
| FLD = LOAD | MF = | 00 | 01 | 10 | 11 |
| Integer/Real Memory to ST(0) | ESCAPE MF 1 MOD 0 0 0 R/M DISP | 38-56 | 52-60 | 40-60 | 46-54 |
| Long Integer Memory to ST(0) | ESCAPE 1 1 1 MOD 1 0 1 R/M DISP | 60-68 | | | |
| Temporary Real Memory to ST(0) | ESCAPE 0 1 1 MOD 1 0 1 R/M DISP | 53-65 | | | |
| BCD Memory to ST(0) | ESCAPE 1 1 1 MOD 1 0 0 R/M DISP | 290-310 | | | |
| ST(i) to ST(0) | ESCAPE 0 0 1 1 1 0 0 0 ST(i) | 17-22 | | | |
| FST = STORE | | | | | |
| ST(0) to Integer/Real Memory | ESCAPE MF 1 MOD 0 1 0 R/M DISP | 84-90 | 82-92 | 96-104 | 80-90 |
| ST(0) to ST(i) | ESCAPE 1 0 1 1 1 0 1 0 ST(i) | 15-22 | | | |
| FSTP = STORE AND POP | | | | | |
| ST(0) to Integer/Real Memory | ESCAPE MF 1 MOD 0 1 1 R/M DISP | 86-92 | 84-94 | 98-106 | 82-92 |
| ST(0) to Long Integer Memory | ESCAPE 1 1 1 MOD 1 1 1 R/M DISP | 94-105 | | | |
| ST(0) to Temporary Real Memory | ESCAPE 0 1 1 MOD 1 1 1 R/M DISP | 52-58 | | | |
| ST(0) to BCD Memory | ESCAPE 1 1 1 MOD 1 1 0 R/M DISP | 520-540 | | | |
| ST(0) to ST(i) | ESCAPE 1 0 1 1 1 0 1 1 ST(i) | 17-24 | | | |
| FXCH = Exchange ST(i) and ST(0) | ESCAPE 0 0 1 1 1 0 0 1 ST(i) | 10-15 | | | |
| Comparison | | | | | |
| FCOM = Compare | | | | | |
| Integer/Real Memory to ST(0) | ESCAPE MF 0 MOD 0 1 0 R/M DISP | 60-70 | 78-91 | 65-75 | 72-86 |
| ST(i) to ST(0) | ESCAPE 0 0 0 1 1 0 1 0 ST(i) | 40-50 | | | |
| FCOMP = Compare and Pop | | | | | |
| Integer/Real Memory to ST(0) | ESCAPE MF 0 MOD 0 1 1 R/M DISP | 63-73 | 80-93 | 67-77 | 74-88 |
| ST(i) to ST(0) | ESCAPE 0 0 0 1 1 0 1 1 ST(i) | 45-52 | | | |
| FCOMPP = Compare ST(1) to ST(0) and Pop Twice | ESCAPE 1 1 0 1 1 0 1 1 0 0 1 | 45-55 | | | |
| FTST = Test ST(0) | ESCAPE 0 0 1 1 1 1 0 0 1 0 0 | 38-48 | | | |
| FXAM = Examine ST(0) | ESCAPE 0 0 1 1 1 1 0 0 1 0 1 | 12-23 | | | |

Mnemonics © Intel 1982.

Table 6. 80287 Extensions to the 80286 Instruction Set (cont.)

| Constants | Optional 8,16 Bit Displacement | | Clock Count Range | | | |
|--|--------------------------------------|-------------------------|-------------------|-------------------|---------|-----------------|
| | 32 Bit Real | 32 Bit Integer | 64 Bit Real | 16 Bit Integer | | |
| | MF | = | 00 | 01 | 10 | 11 |
| FLDZ = LOAD + 0.0 into ST(0) | ESCAPE | 0 0 1 1 1 1 0 1 1 1 0 | 11-17 | | | |
| FLD1 = LOAD + 1.0 into ST(0) | ESCAPE | 0 0 1 1 1 1 0 1 0 0 0 | 15-21 | | | |
| FLDPI = LOAD π into ST(0) | ESCAPE | 0 0 1 1 1 1 0 1 0 1 1 | 16-22 | | | |
| FLDL2T = LOAD $\log_2 10$ into ST(0) | ESCAPE | 0 0 1 1 1 1 0 1 0 0 1 | 16-22 | | | |
| FLDL2E = LOAD $\log_2 e$ into ST(0) | ESCAPE | 0 0 1 1 1 1 0 1 0 1 0 | 15-21 | | | |
| FLDLG2 = LOAD $\log_{10} 2$ into ST(0) | ESCAPE | 0 0 1 1 1 1 0 1 1 0 0 | 18-24 | | | |
| FLDLN2 = LOAD $\log_e 2$ into ST(0) | ESCAPE | 0 0 1 1 1 1 0 1 1 0 1 | 17-23 | | | |
| Arithmetic | | | | | | |
| FADD = Addition | | | | | | |
| Integer/Real Memory with ST(0) | ESCAPE | MF 0 MOD 0 0 0 R/M | DISP | 90-120 | 108-143 | 95-125 102-137 |
| ST(i) and ST(0) | ESCAPE | d P 0 1 1 0 0 0 ST(i) | 70-100 (Note 1) | | | |
| FSUB = Subtraction | | | | | | |
| Integer/Real Memory with ST(0) | ESCAPE | MF 0 MOD 1 0 R R/M | DISP | 90-120 | 108-143 | 95-125 102-137 |
| ST(i) and ST(0) | ESCAPE | d P 0 1 1 1 0 R R/M | 70-100 (Note 1) | | | |
| FMUL = Multiplication | | | | | | |
| Integer/Real Memory with ST(0) | ESCAPE | MF 0 MOD 0 0 1 R/M | DISP | 110-125 | 130-144 | 112-168 124-138 |
| ST(i) and ST(0) | ESCAPE | d P 0 1 1 0 0 1 R/M | 90-145 (Note 1) | | | |
| FDIV = Division | | | | | | |
| Integer/Real Memory with ST(0) | ESCAPE | MF 0 MOD 1 1 R R/M | DISP | 215-225 | 230-243 | 220-230 224-238 |
| ST(i) and ST(0) | ESCAPE | d P 0 1 1 1 1 R R/M | 193-203 (Note 1) | | | |
| FSQRT = Square Root of ST(0) | ESCAPE | 0 0 1 1 1 1 1 1 0 1 0 | 180-186 | | | |
| FSCALE = Scale ST(0) by ST(1) | ESCAPE | 0 0 1 1 1 1 1 1 1 0 1 | 32-38 | | | |
| FPREM = Partial Remainder of ST(0) \div ST(1) | ESCAPE | 0 0 1 1 1 1 1 1 0 0 0 | 15-190 | | | |
| FRNDINT = Round ST(0) to Integer | ESCAPE | 0 0 1 1 1 1 1 1 1 0 0 | 16-50 | | | |

NOTE:

1. If P=1 then add 5 clocks.

Table 6. 80287 Extensions to the 80286 Instruction Set (cont.)

| | | Optional 8,16 Bit Displacement | Clock Count Range | |
|---|--------------|--------------------------------------|-------------------|---------|
| FXTRACT = Extract Components of ST(0) | ESCAPE 0 0 1 | 1 1 1 1 0 1 0 0 | 27-55 | |
| FABS = Absolute Value of ST(0) | ESCAPE 0 0 1 | 1 1 1 0 0 0 0 1 | 10-17 | |
| FCHS = Change Sign of ST(0) | ESCAPE 0 0 1 | 1 1 1 0 0 0 0 0 | 10-17 | |
| Transcendental | | | | |
| FPTAN = Partial Tangent of ST(0) | ESCAPE 0 0 1 | 1 1 1 1 0 0 1 0 | 30-540 | |
| FPATAN = Partial Arctangent of ST(0) = ST(1) | ESCAPE 0 0 1 | 1 1 1 1 0 0 1 1 | 250-800 | |
| F2XM1 = $2^{ST(0)} - 1$ | ESCAPE 0 0 1 | 1 1 1 1 0 0 0 0 | 310-630 | |
| FYL2X = ST(1) • Log ₂ ST(0) | ESCAPE 0 0 1 | 1 1 1 1 0 0 0 1 | 900-1100 | |
| FYL2XP1 = ST(1) • Log ₂ ST(0) + 1 | ESCAPE 0 0 1 | 1 1 1 1 1 0 0 1 | 700-1000 | |
| Processor Control | | | | |
| FINIT = Initialize NPX | ESCAPE 0 1 1 | 1 1 1 0 0 0 1 1 | 2-8 | |
| FSETPM = Enter Protected Mode | ESCAPE 0 1 1 | 1 1 1 0 0 1 0 0 | 2-8 | |
| FSTSW AX = Store Control Word | ESCAPE 1 1 1 | 1 1 1 0 0 0 0 0 | 10-16 | |
| FLDCW = Load Control Word | ESCAPE 0 0 1 | MOD 1 0 1 R/M | DISP | 7-14 |
| FSTCW = Store Control Word | ESCAPE 0 0 1 | MOD 1 1 1 R/M | DISP | 12-18 |
| FSTSW = Store Status Word | ESCAPE 1 0 1 | MOD 1 1 1 R/M | DISP | 12-18 |
| FCLEX = Clear Exceptions | ESCAPE 0 1 1 | 1 1 1 0 0 0 1 0 | 2-8 | |
| FSTENV = Store Environment | ESCAPE 0 0 1 | MOD 1 1 0 R/M | DISP | 40-50 |
| FLDENV = Load Environment | ESCAPE 0 0 1 | MOD 1 0 0 R/M | DISP | 35-45 |
| FSAVE = Save State | ESCAPE 1 0 1 | MOD 1 1 0 R/M | DISP | 205-215 |
| FRSTOR = Restore State | ESCAPE 1 0 1 | MOD 1 0 0 R/M | DISP | 205-215 |
| FINCSTP = Increment Stack Pointer | ESCAPE 0 0 1 | 1 1 1 1 0 1 1 1 | 6-12 | |
| FDECSTP = Decrement Stack Pointer | ESCAPE 0 0 1 | 1 1 1 1 0 1 1 0 | 6-12 | |

Table 6. 80287 Extensions to the 80286 Instruction Set (cont.)

| | | Clock Count Range |
|----------------------------|--------------------------------|-------------------|
| FFREE = Free ST(i) | ESCAPE 1 0 1 1 1 0 0 0 ST(i) | 9-16 |
| FNOP = No Operation | ESCAPE 0 0 1 1 1 0 1 0 0 0 0 | 10-16 |

NOTES:

1. if mod=00 then DISP=0*, disp-low and disp-high are absent
 if mod=01 then DISP=disp-low sign-extended to 16-bits, disp-high is absent
 if mod=10 then DISP=disp-high; disp-low
 if mod=11 then r/m is treated as an ST(i) field
2. if r/m=000 then EA=(BX) + (SI) + DISP
 if r/m=001 then EA=(BX) + (DI) + DISP
 if r/m=010 then EA=(BP) + (SI) + DISP
 if r/m=011 then EA=(BP) + (DI) + DISP
 if r/m=100 then EA=(SI) + DISP
 if r/m=101 then EA=(DI) + DISP
 if r/m=110 then EA=(BP) + DISP
 if r/m=111 then EA=(BX) + DISP

*except if mod=000 and r/m=110 then EA =disp-high; disp-low.

3. MF= Memory Format
 00—32-bit Real
 01—32-bit Integer
 10—64-bit Real
 11—16-bit Integer
4. ST(0)= Current stack top
 ST(i) ith register below stack top
5. d= Destination
 0—Destination is ST(0)
 1—Destination is ST(i)
6. P= Pop
 0—No pop
 1—Pop ST(0)
7. R= Reverse: When d=1 reverse the sense of R
 0—Destination (op) Source
 1—Source (op) Destination
8. For **FSQRT**: $-0 \leq ST(0) \leq +\infty$
 For **FSCALE**: $-2^{15} \leq ST(1) < +2^{15}$ and ST(1) integer
 For **F2XM1**: $0 \leq ST(0) \leq 2^{-1}$
 For **FYL2X**: $0 < ST(0) < \infty$
 $-\infty < ST(1) < +\infty$
 For **FYL2XP1**: $0 \leq IST(0) < (2 - \sqrt{2})/2$
 $-\infty < ST(1) < \infty$
 For **FPTAN**: $0 \leq ST(0) \leq \pi/4$
 For **FPATAN**: $0 \leq ST(0) < ST(1) < +\infty$
9. ESCAPE bit pattern is 11011.

***Glossary Of 80287 And
Floating-Point Terminology***

GLOSSARY OF 80287 AND FLOATING-POINT TERMINOLOGY

This glossary defines many terms that have precise technical meanings as specified in the IEEE 754 Standard. Where these terms are used, they have been capitalized to emphasize the precision of their meanings. In reading these definitions, you may therefore interpret any capitalized terms or phrases as cross-references.

Affine Mode: a state of the 80287, selected in the 80287 Control Word, in which infinities are treated as having a sign. Thus, the values +INFINITY and -INFINITY are considered different; they can be compared with finite numbers and with each other.

Base: (1) a term used in logarithms and exponentials. In both contexts, it is a number that is being raised to a power. The two equations ($y = \log \text{ base } b \text{ of } x$) and ($b^y = x$) are the same.

Base: (2) a number that defines the representation being used for a string of digits. Base 2 is the binary representation; Base 10 is the decimal representation; Base 16 is the hexadecimal representation. In each case, the Base is the factor of increased significance for each succeeding digit (working up from the bottom).

Bias: the difference between the unsigned Integer that appears in the Exponent field of a Floating-Point Number and the true Exponent that it represents. To obtain the true Exponent, you must subtract the Bias from the given Exponent. For example, the Short Real format has a Bias of 127 whenever the given Exponent is nonzero. If the 8-bit Exponent field contains 10000011, which is 131, the true Exponent is $131 - 127$, or +4.

Biased Exponent: the Exponent as it appears in a Floating-Point Number, interpreted as an unsigned, positive number. In the above example, 131 is the Biased Exponent.

Binary Coded Decimal: a method of storing numbers that retains a base 10 representation. Each decimal digit occupies 4 full bits (one hexadecimal digit). The hex values A through F (1010 through 1111) are not used. The 80287 supports a Packed Decimal format that consists of 9 bytes of Binary Coded Decimal (18 decimal digits) and one sign byte.

Binary Point: an entity just like a decimal point, except that it exists in binary numbers. Each binary digit to the right of the Binary Point is multiplied by an increasing negative power of two.

C3—C0: the four “condition code” bits of the 80287 Status Word. These bits are set to certain values by the compare, test, examine, and remainder functions of the 80287.

Characteristic: a term used for some non-Intel computers, meaning the Exponent field of a Floating-Point Number.

Chop: to set the fractional part of a real number to zero, yielding the nearest integer in the direction of zero.

Control Word: a 16-bit 80287 register that the user can set, to determine the modes of computation the 80287 will use, and the error interrupts that will be enabled.

Denormal: a special form of Floating-Point Number, produced when an Underflow occurs. On the 80287, a Denormal is defined as a number with a Biased Exponent that is zero. By providing a Significant with leading zeros, the range of possible negative Exponents can be extended by the number of

bits in the Significand. Each leading zero is a bit of lost accuracy, so the extended Exponent range is obtained by reducing significance.

Double Extended: the Standard's term for the 80287 Temporary Real format, with more Exponent and Significand bits than the Double (Long Real) format, and an explicit Integer bit in the Significand.

Double Floating Point Number: the Standard's term for the 80287's 64-bit Long Real format.

Environment: the 14 bytes of 80287 registers affected by the FSTENV and FLDENV instructions. It encompasses the entire state of the 80287, except for the 8 Temporary Real numbers of the 80287 stack. Included are the Control Word, Status Word, Tag Word, and the instruction, opcode, and operand information provided by interrupts.

Exception: any of the six error conditions (I, D, O, U, Z, P) signalled by the 80287.

Exponent: (1) any power that is raised by an exponential function. For example, the operand to the function `mqrEXP` is an Exponent. The Integer operand to `mqrYI2` is an Exponent.

Exponent: (2) the field of a Floating-Point Number that indicates the magnitude of the number. This would fall under the above more general definition (1), except that a Bias sometimes needs to be subtracted to obtain the correct power.

Floating-Point Number: a sequence of data bytes that, when interpreted in a standardized way, represents a Real number. Floating-Point Numbers are more versatile than Integer representations in two ways. First, they include fractions. Second, their Exponent parts allow a much wider range of magnitude than possible with fixed-length Integer representations.

Gradual Underflow: a method of handling the Underflow error condition that minimizes the loss of accuracy in the result. If there is a Denormal number that represents the correct result, that Denormal is returned. Thus, digits are lost only to the extent of denormalization. Most computers return zero when Underflow occurs, losing all significant digits.

Implicit Integer Bit: a part of the Significand in the Short Real and Long Real formats that is not explicitly given. In these formats, the entire given Significand is considered to be to the right of the Binary Point. A single Implicit Integer Bit to the left of the Binary Point is always 1, except in one case. When the Exponent is the minimum (Biased Exponent is 0), the Implicit Integer Bit is 0.

Indefinite: a special value that is returned by functions when the inputs are such that no other sensible answer is possible. For each Floating-Point format there exists one Nontrapping NaN that is designated as the Indefinite value. For binary Integer formats, the negative number furthest from zero is often considered the Indefinite value. For the 80287 Packed Decimal format, the Indefinite value contains all 1's in the sign byte and the uppermost digits byte.

Infinity: a value that has greater magnitude than any Integer or any Real number. The existence of Infinity is subject to heated philosophical debate. However, it is often useful to consider Infinity as another number, subject to special rules of arithmetic. All three Intel Floating-Point formats provide representations for `+INFINITY` and `-INFINITY`. They support two ways of dealing with Infinity: Projective (unsigned) and Affine (signed).

Integer: a number (positive, negative, or zero) that is finite and has no fractional part. Integer can also mean the computer representation for such a number: a sequence of data bytes, interpreted in a standard way. It is perfectly reasonable for Integers to be represented in a Floating-Point format; this is what the 80287 does whenever an Integer is pushed onto the 80287 stack.

Invalid Operation: the error condition for the 80287 that covers all cases not covered by other errors. Included are 80287 stack overflow and underflow, NaN inputs, illegal infinite inputs, out-of-range inputs, and illegal unnormal inputs.

Long Integer: an Integer format supported by the 80287 that consists of a 64-bit Two's Complement quantity.

Long Real: a Floating-Point Format supported by the 80287 that consists of a sign, an 11-bit Biased Exponent, an Implicit Integer Bit, and a 52-bit Significand—a total of 64 explicit bits.

Mantissa: a term used for some non-Intel computers, meaning the Significand of a Floating-Point Number.

Masked: a term that applies to each of the six 80287 Exceptions I,D,Z,O,U,P. An exception is Masked if a corresponding bit in the 80287 Control Word is set to 1. If an exception is Masked, the 80287 will not generate an interrupt when the error condition occurs; it will instead provide its own error recovery.

NaN: an abbreviation for Not a Number; a Floating-Point quantity that does not represent any numeric or infinite quantity. NaNs should be returned by functions that encounter serious errors. If created during a sequence of calculations, they are transmitted to the final answer and can contain information about where the error occurred.

Nontrapping NaN: a NaN in which the most significant bit of the fractional part of the Significand is 1. By convention, these NaNs can undergo certain operations without visible error. Nontrapping NaNs are implemented for the 80287 via the software in EH87.LIB.

Normal: the representation of a number in a Floating-Point format in which the Significand has an Integer bit 1 (either explicit or Implicit).

Normalizing Mode: a state in which nonnormal inputs are automatically converted to normal inputs whenever they are used in arithmetic. Normalizing Mode is implemented for the 80287 via the software in EH87.LIB.

NPX: Numeric Processor Extension. This is the 80287.

Overflow: an error condition in which the correct answer is finite, but has magnitude too great to be represented in the destination format.

Packed Decimal: an Integer format supported by the 80287. A Packed Decimal number is a 10-byte quantity, with nine bytes of 18 Binary Coded Decimal digits, and one byte for the sign.

Pop: to remove from a stack the last item that was placed on the stack.

Precision Control: an option, programmed through the 80287 Control Word, that allows all 80287 arithmetic to be performed with reduced precision. Because no speed advantage results from this option, its only use is for strict compatibility with the IEEE Standard, and with other computer systems.

Precision Exception: an 80287 error condition that results when a calculation does not return an exact answer. This exception is usually Masked and ignored; it is used only in extremely critical applications, when the user must know if the results are exact.

Projective Mode: a state of the 80287, selected in the 80287 Control Word, in which infinities are treated as not having a sign. Thus the values +INFINITY and -INFINITY are considered the same.

Certain operations, such as comparison to finite numbers, are illegal in Projective Mode but legal in Affine Mode. Thus Projective Mode gives you a greater degree of error control over infinite inputs.

Pseudo Zero: a special value of the Temporary Real format. It is a number with a zero significand and an Exponent that is neither all zeros or all ones. Pseudo zeros can come about as the result of multiplication of two Unnormal numbers; but they are very rare.

Real: any finite value (negative, positive, or zero) that can be represented by a decimal expansion. The fractional part of the decimal expansion can contain an infinite number of digits. Reals can be represented as the points of a line marked off like a ruler. The term Real can also refer to a Floating-Point Number that represents a Real value.

Short Integer: an Integer format supported by the 80287 that consists of a 32-bit Two's Complement quantity. Short Integer is not the shortest 80287 Integer format—the 16-bit Word Integer is.

Short Real: a Floating-Point Format supported by the 80287, which consists of a sign, an 8-bit Biased Exponent, an Implicit Integer Bit, and a 23-bit Significand—a total of 32 explicit bits.

Significand: the part of a Floating-Point Number that consists of the most significant nonzero bits of the number, if the number were written out in an unlimited binary format. The Significand alone is considered to have a Binary Point after the first (possibly Implicit) bit; the Binary Point is then moved according to the value of the Exponent.

Single Extended: a Floating-Point format, required by the Standard, that provides greater precision than Single; it also provides an explicit Integer Significand bit. The 80287's Temporary Real format meets the Single Extended requirement as well as the Double Extended requirement.

Single Floating-Point Number: the Standard's term for the 80287's 32-bit Short Real format.

Standard: "a Proposed Standard for Binary Floating-Point Arithmetic," Draft 10.0 of IEEE Task P754, December 2, 1982.

Status Word: A 16-bit 80287 register that can be manually set, but which is usually controlled by side effects to 80287 instructions. It contains condition codes, the 80287 stack pointer, busy and interrupt bits, and error flags.

Tag Word: a 16-bit 80287 register that is automatically maintained by the 80287. For each space in the 80287 stack, it tells if the space is occupied by a number; if so, it gives information about what kind of number.

Temporary Real: the main Floating-Point Format used by the 80287. It consists of a sign, a 15-bit Biased Exponent, and a Significand with an explicit Integer bit and 63 fractional-part bits.

Transcendental: one of a class of functions for which polynomial formulas are always approximate, never exact for more than isolated values. The 80287 supports trigonometric, exponential, and logarithmic functions; all are Transcendental.

Trapping NaN: a NaN that causes an I error whenever it enters into a calculation or comparison, even a nonordered comparison.

Two's Complement: a method of representing Integers. If the uppermost bit is 0, the number is considered positive, with the value given by the rest of the bits. If the uppermost bit is 1, the number is negative, with the value obtained by subtracting ($2^{\text{bit count}}$) from all the given bits. For example, the 8-bit number 11111100 is -4 , obtained by subtracting 2^8 from 252.

Unbiased Exponent: the true value that tells how far and in which direction to move the Binary Point of the Significand of a Floating-Point Number. For example, if a Short Real Exponent is 131, we subtract the Bias 127 to obtain the Unbiased Exponent +4. Thus, the Real number being represented is the Significand with the Binary Point shifted 4 bits to the right.

Underflow: an error condition in which the correct answer is nonzero, but has a magnitude too small to be represented as a Normal number in the destination Floating-Point format. The Standard specifies that an attempt be made to represent the number as a Denormal.

Unmasked: a term that applies to each of the six 80287 Exceptions: I,D,Z,O,U,P. An exception is Unmasked if a corresponding bit in the 80287 Control Word is set to 0. If an exception is Unmasked, the 80287 will generate an interrupt when the error condition occurs. You can provide an interrupt routine that customizes your error recovery.

Unnormal: a Temporary Real representation in which the explicit Integer bit of the Significand is zero, and the exponent is nonzero. We consider Unnormal numbers distinct from Denormal numbers.

Word Integer: an Integer format supported by both the 80286 and the 80287 that consists of a 16-bit Two's Complement quantity.

Zero divide: an error condition in which the inputs are finite, but the correct answer, even with an unlimited exponent, has infinite magnitude.

INDEX

- Address Modes, 2-39, 2-40, 3-1
- Architecture, 1-8, 3-1, 3-2, D-1, D-7
- Arithmetic Instructions, 2-4 through 2-9, D-22, D-23
- ASM 286, 2-38 through 2-45
- Automatic Exception Handling, 1-36

- Binary Integers, 1-15

- Comparison Instructions, 2-9, 2-10, 2-11
- Compatibility of 80287 and 8087, 2-1, Appendix B, D-14
- Computation Fundamentals, 1-13
- Concurrent (80286 and 80287) Processing, 2-45 through 2-50
- Condition Codes Interpretation, 1-9, 1-10, 1-11, D-11
- Constant Instructions, 2-13, 2-14, D-22
- Control Word, 1-11, 1-12, D-10, D-13

- Data Synchronization, 2-46, 2-47, 2-48
- Data Transfer Instructions, 2-2, 2-3, 2-4, D-21
- Data Types and Formats,
 - Binary Integers, 1-15
 - Decimal Integers, 1-15
 - Encoding of Data Type, 1-28 through 1-32
 - Infinity Control, 1-19
 - Precision Control, 1-18, 1-35
 - Real Numbers, 1-15, 1-16, 1-17
 - Rounding Control, 1-18
- Decimal Integers, 1-15
- Denormalization, 1-20
- Denormalized Operand, 1-33, 1-35
- Denormals, 1-19, 1-20, 1-21
- Destination Operands, 2-2

- EM (Emulation Mode) Bit in 80286, 3-3
- Emulation of 80287, 2-45, 3-4, 3-5
- Encoding of Data Types, 1-28 through 1-32
- Error Synchronization, 2-48, 2-49, 2-50

- Exception Handling, Numeric Processing, 3-5, 3-6, 3-7, D-12
- Exceptions, Numeric, 1-32 through 1-37
 - Automatic Exception Handling, 1-36
 - Handling Numeric Errors, 1-33
 - Inexact Result, 1-33
 - Invalid Operation, 1-32
 - Masked Response, 1-33, 1-34, 1-35
 - Numeric Overflow and Underflow, 1-33, 1-35
 - Software Exception Handling, 1-36, 1-37
 - Zero Divisor, 1-32, 1-35, D-10
- Exponent Field, 1-15

- F2XM1 (Exponentiation), 1-2, 2-12, 2-35, D-23, D-24
- FADD (Add Real), 1-2, 2-2, 2-5, 2-6, 2-22, D-22
- FADDP (Add Real and POP), 2-5, 2-6, 2-22, D-22
- FABS (Absolute Value), 2-5, 2-9, 2-22, D-23
- FBLD (Packed Decimal—BCD—Load), 2-2, 2-4, 2-22
- FBSTP (Packed Decimal—BCD—Store and Pop), 2-2, 2-4, 2-3
- FCHS (Change Signs), 2-5, 2-9, 2-23, D-23
- FCLEX/FNCLEX (Clear Exceptions), 2-14, 2-16, 2-32, D-23
- FCOM (Compare Real), 2-10, 2-23, D-21
- FCOMP (Compare Real and Pop), 2-10, 2-23, D-21
- FCOMPP (Compare Real and Pop Twice), 2-10, 2-24, D-21
- FDECSSTP (Decrement Stack Pointer), 2-14, 2-19, 2-24, D-23
- FDISI/FNDISI, 2-15, B-1
- FDIV (Divide Real), 2-5, 2-7, 2-24, D-22
- FDIV DWORD PTR (Division, Single Precision), 1-2
- FDIVP (Divide Real and Pop), 2-5, 2-7, 2-24
- FDIVR (Divide Real Reversed), 2-5, 2-7, 2-24

INDEX

- FDIVRP (Divide Real Reversed and Pop), 2-5, 2-7, 2-25
- FENI/FNENI, 2-15, B-1
- FFREE (Free Register), 2-14, 2-19, 2-25, D-23
- FIADD (Integer Add), 2-5, 2-6, 2-25
- FICOM (Integer Compare), 2-10, 2-25
- FICOMP (Integer Compare and Pop), 2-10, 2-25
- FIDIV (Integer Divide), 2-5, 2-7, 2-26
- FIDIVR (Integer Divide Reversed), 2-5, 2-7, 2-26
- FILD (Integer Load), 2-2, 2-3, 2-26
- FIMUL (Integer Multiply), 2-5, 2-7, 2-26, D-22
- FINCSTP (Increment Stack Pointer), 2-14, 2-19, 2-26, D-23
- FINIT/FNINIT (Initialize Processor), 2-14, 2-15, 2-27, 2-37, D-23
- FIST (Integer Store), 1-34, 1-35, 2-2, 2-3, 2-27
- FISTP (Integer Store and Pop), 2-2, 2-4, 2-27
- FISUB (Integer Subtract), 2-5, 2-6, 2-27
- FISUBR (Integer Subtract Reversed), 2-5, 2-6, 2-27
- FLD (Load Real), 1-35, 2-3, 2-28, D-21
- FLD1 (Load One), 2-13, 2-29, D-22
- FLDCW (Load Control Word), 2-14, 2-15, 2-28, 2-37, D-23
- FLDENV (Load Environment), 1-36, 2-14, 2-19, 2-25, D-23
- FLDLZE (Load Log Base 2 of e), 2-13, 2-14, 2-29, D-22
- FLDL2T (Load Log Base 2 of 10), 2-13, 2-14, 2-29, D-22
- FLDLG2 (Load Log Base 10 of 2), 2-13, 2-14, 2-28, D-22
- FLDLN2 (Load Log Base e of 2), 2-13, 2-14, 2-28, D-22
- FLDPI (Load PI), 2-13, 2-14, 2-25, D-22
- FLDZ (Load Zero), 2-13, 2-29, D-22
- Floating Point, 1-15, 1-20
- FMUL (Multiply Real), 2-5, 2-7, 2-30
- FMULP (Multiply Real and Pop), 2-5, 2-7, 2-30
- FNOP (No Operation), 2-14, 2-19, 2-30, D-23
- FPATAN (Partial Arctangent), 1-2, 2-12, 2-30, D-23, D-24
- FPREM (Partial Remainder), 1-34, 2-5, 2-7, 2-8, 2-30, 4-17, D-22
- FPTAN (Partial Tangent), 2-12, 2-31, 4-17, D-23, D-24
- FRNDINT (Round to Integer), 1-23, 2-5, 2-9, 2-35, D-23
- FRSTOR (Restore State), 2-14, 2-17, 2-31, 2-37, D-23
- FSAVE, FNSAVE (Save State), 2-14, 2-17, 2-31, 2-37, D-23
- FSCALE (Scale), 2-5, 2-7, 2-32, D-22
- FSETPM (Set Protected Mode), 2-14, 2-15, 2-32, D-23
- FSQRT (Square Root), 1-34, 2-1, 2-5, 2-7, 2-32, D-22
- FST (Store Real), 1-34, 1-35, 2-2, 2-3, 2-32, D-21
- FSTCW/FNSTCW (Store Control Word), 2-14, 2-16, 2-32, D-23
- FSTENV/FNSTENV (Store Environment), 2-14, 2-18, 2-32, D-23
- FSTP (Store Real and Pop), 1-34, 1-35, 2-2, 2-3, 2-33, D-21
- FSTSW/FNSTSW (Store Status Word), 2-9, 2-14, 2-16, 2-33, 2-37, D-23
- FSTSW AX, FNSTSW AX (Store Status Word in AX), 2-14, 2-16, 2-33, D-23
- FSUB (Subtract Real), 2-5, 2-6, 2-33, D-22
- FSUBP (Subtract Real and Pop), 2-5, 2-6, 2-34
- FSUBR (Subtract Real Reversed), 2-5, 2-6, 2-34
- FSUBRP (Subtract Real Reversed and Pop), 2-5, 2-6, 2-34
- FTST (Test), 2-10, 2-11, 2-34, D-21
- FWAIT (CPU Wait), 2-14, 2-19, 2-34
- FXAM (Examine), 1-2, 1-23, 2-10, 2-11, 2-35, 4-2, 4-3, D-21
- FXCH (Exchange Registers), 2-2, 2-3, 2-35, D-21
- FXTRACT (Extract Exponent and Significand), 2-5, 2-9, 2-35, D-23

INDEX

- FYL2X (Logarithm—of x), 1-2, 2-13, 2-35, D-23, D-24
- FYL2XP1 (Logarithm—of $x+1$), 2-13, 2-35, D-23, D-24
- GET\$REAL\$ERROR (Store, then Clear, Exception Flags), 2-37
- Handling Numeric Errors, 1-33
- Hardware Interface, 1-6, D-4
- I/O Locations (Dedicated and Reserved), 3-2
- IEEE P754 Standard, Implementation, Appendix C
- Indefinite, 1-27
- Inexact Result, 1-33
- Infinity, 1-25
- Infinity Control, 1-19
- INIT\$REAL\$MATH\$UNIT (Initialize Processor Procedure), 2-37
- Initialization and Control, 3-2 through 3-7
- Instruction Coding and Decoding, A-1
- Instruction Execution Times, 2-20, 2-21
- Instruction Length, 2-22 through 2-36
- Integer Bit, 1-16, 1-17, 1-20
- Introduction to Numeric Processor 80287, 1-1, Appendix D
- Invalid Operation, 1-32
- Long Integer Format, 1-16
- Long Real Format, 1-16
- Machine Instruction Encoding and Decoding, Appendix A
- Masked Response, 1-33, 1-34, 1-35
- MP (Math Present) Flag, 3-3
- NaN (Not a Number), 1-25, 1-26, 1-27
- NO-WAIT FORM, 2-14
- Nonnormal Real Numbers, 1-20
- Number System, 1-13, 1-14, 1-15
- Numeric Operands, 2-1
- Numeric Overflow and Underflow, 1-33, 1-35
- Numeric Processor Overview, 1-1
- Output Format, 4-17
- Overflow, 1-20, 1-33, 4-16, D-12
- Packed Decimal Notation, 1-15, 1-16
- Precision Control, 1-18, 1-35
- PLM-286, 2-41, 2-42
- Pointers (INstruction/Data), 1-12, D-10
- Processor Control Instructions, 2-14 through 2-19, D-23, D-24
- Programming Examples (Chapter 4), Conditional Branching, 4-1, 4-2
Exception Handling, 4-3 through 4-6
Floating Point to ASCII Conversion, 4-7 through 4-16
Function Partitioning, 4-14
Special Instructions, 4-15
- Programming Interface, 1-5, D-4
- Pseudo zeros and zeros, 1-23, 1-24
- Real Number Range, 1-14
- Real Numbers, 1-15, 1-16, 1-17
- Recognizing the Presence of 80287, 3-2, 3-33
- Register Stack, 1-8, 1-9
- RESTORE\$REAL\$STATUS (Restore Processor State), 2-37
- Rounding Control, 1-18
- SAVE\$REAL\$STATUS (Save Processor State), 2-37
- Scaling, 4-16
- SET\$REAL\$MODE (Set Exception Masks, Rounding Precision, and Infinity Controls), 2-37
- Short Integer Format, 1-16
- Short Real Format, 1-16
- Significand, 1-15
- Software Exception Handling, 1-36, 1-37
- Source Operands, 2-2
- Status Word, 1-9, 1-10, 1-11
- Tag Word 1-12, D-10
- Temporary Real Format, 1-16
- Transcendental Instructions, 2-11, 2-12, D-23
- Trigonometric Calculation Examples, 4-17 through 4-23

INDEX

Underflow, 1-20, 1-33, 4-16, D-12

Unnormals, 1-20, 1-22, 1-23

Upgradability, 1-4

WAIT Form, 2-14

Word Integer Format, 1-16

Zero Divisor, 1-32, 1-35, D-10

Zeros, 1-23, 1-24



DOMESTIC SALES OFFICES

ALABAMA

Intel Corp.
5015 Bradford Drive
Suite 2
Huntsville 35805
Tel: (205) 830-4010

ARIZONA

Intel Corp.
11225 N. 28th Drive
Suite 214D
Phoenix 85029
Tel: (602) 869-4980

Intel Corp.
1161 N. El Dorado Place
Suite 301
Tucson 85715
Tel: (602) 299-6815

CALIFORNIA

Intel Corp.
21515 Vanowen Street
Suite 116
Canoga Park 91303
Tel: (818) 704-8500

Intel Corp.
2230 E. Imperial Highway
Suite 218
El Segundo 90245
Tel: (213) 640-6040

Intel Corp.
1510 Arden Way, Suite 101
Sacramento 95815
Tel: (916) 920-8096

Intel Corp.
4350 Executive Drive
Suite 105
San Diego 92121
(619) 452-5890

Intel Corp.*
2000 East 4th Street
Suite 100
Santa Ana 92705
Tel: (714) 835-9642
TWX: 910-595-1114

Intel Corp.*
1350 Shorebird Way
Mt. View 94043
Tel: (415) 968-8086
TWX: 910-339-9279
910-338-0255

COLORADO

Intel Corp.
3300 Mitchell Lane, Suite 210
Boulder 80301
Tel: (303) 442-8088

Intel Corp.
4445 Northpark Drive
Suite 100
Colorado Springs 80907
Tel: (303) 594-6622

Intel Corp.*
650 S. Cherry Street
Suite 915
Denver 80222
Tel: (303) 321-8086
TWX: 910-931-2289

CONNECTICUT

Intel Corp.
26 Mill Plain Road
Danbury 06810
Tel: (203) 748-3130
TWX: 710-456-1199

EMC Corp.
222 Summer Street
Stamford 06901
Tel: (203) 327-2934

FLORIDA

Intel Corp.
242 N. Westmonte Drive
Suite 105
Allamonte Springs 32714
Tel: (305) 869-5588

Intel Corp.
6369 N.W. 6th Way, Suite 100
FL Lauderdale 33309
Tel: (305) 771-0600
TWX: 510-556-9407

FLORIDA (Cont'd)

Intel Corp.
11300 4th Street North
Suite 170
St. Petersburg 33702
Tel: (813) 577-2413

GEORGIA

Intel Corp.
3280 Pointe Parkway
Suite 200
Norcross 30092
Tel: (404) 449-0541

ILLINOIS

Intel Corp.*
300 N. Martingale Road, Suite 400
Schaumburg 60172
Tel: (312) 310-8031

INDIANA

Intel Corp.
8777 Purdue Road
Suite 125
Indianapolis 46268
Tel: (317) 875-0823

IOWA

Intel Corp.
St. Andrews Building
1930 St. Andrews Drive N.E.
Cedar Rapids 52402
Tel: (319) 393-5510

KANSAS

Intel Corp.
8480 W. 110th Street
Suite 170
Overland Park 66210
Tel: (913) 345-2727

LOUISIANA

Industrial Digital Systems Corp.
Tel: (504) 899-1654

MARYLAND

Intel Corp.*
7321 Parkway Drive South
Suite C
Hanover 21076
Tel: (301) 796-7500
TWX: 710-862-1944

Intel Corp.
7833 Walker Drive
Greenbelt 20770
Tel: (301) 441-1020

MASSACHUSETTS

Intel Corp.*
Westford Corp. Center
9 Carlisle Road
Westford 01886
Tel: (617) 629-3222
TWX: 710-343-6333

MICHIGAN

Intel Corp.
7071 Orchard Lake Road
Suite 100
West Bloomfield 48033
Tel: (313) 851-8086

MINNESOTA

Intel Corp.
3500 W. 80th Street
Suite 360
Bloomington 55431
Tel: (612) 835-6722
TWX: 910-576-2857

MISSOURI

Intel Corp.
4203 Earth City Expressway
Suite 151
Earth City 63045
Tel: (314) 291-1990

NEW JERSEY

Intel Corp.*
Rarian Plaza III
Rarian Center
Edison 08837
Tel: (201) 225-3000
TWX: 710-480-6238

NEW MEXICO

Intel Corp.
8500 Menaul Boulevard N.E.
Suite B 225
Albuquerque 87112
Tel: (505) 292-8086

NEW YORK

Intel Corp.*
300 Vanderbilt Motor Parkway
Hauppauge 11789
Tel: (516) 231-3300
Tel: (516) 463-9592
TWX: 510-227-6236

Intel Corp.
Suite 2B Hollowbrook Park
15 Myers Corners Road
Wappinger Falls 12590
Tel: (914) 297-6161
TWX: 510-248-0060

Intel Corp.*
211 White Spruce Boulevard
Rochester 14623
Tel: (716) 424-1050
TWX: 510-253-7391

T-Squared
6443 Findings Road
Syracuse 13206
Tel: (315) 463-9592
TWX: 510-541-0554

T-Squared
7353 Pittsford-Victor Road
Victor 14564
Tel: (716) 924-9101
TWX: 510-254-8542

NORTH CAROLINA

Intel Corp.
5700 Executive Center Drive
Suite 213
Charlotte 28212
Tel: (704) 568-8966

Intel Corp.
2700 Wycliff Road
Suite 102
Raleigh 27607
Tel: (919) 781-9022

OHIO

Intel Corp.*
6500 Poe Avenue
Dayton 45414
Tel: (513) 890-5350
TWX: 810-450-2528

Intel Corp.*
Chagrin-Brainard Bldg., No 300
28001 Chagrin Boulevard
Cleveland 44122
Tel: (216) 464-2736
TWX: 810-427-9298

OKLAHOMA

Intel Corp.
4157 S. Harward Avenue
Suite 123
Tulsa 74135
Tel: (918) 749-8688

OREGON

Intel Corp.
10700 S.W. Beaverton
Hillsdale Highway
Suite 22
Beaverton 97005
Tel: (503) 641-8086
TWX: 910-467-8741

PENNSYLVANIA

Intel Corp.
1513 Cedar Cliff Drive
Camp Hill, 17011
Tel: (717) 737-5035

Intel Corp.*
455 Pennsylvania Avenue
Fort Washington 19034
Tel: (215) 641-1000
TWX: 510-661-2077

Intel Corp.*
400 Penn Center Boulevard
Suite 510
Pittsburgh 15235
Tel: (412) 823-4970

Q.E.D. Electronics
139 Terwood Road
Box T
Willow Grove 19090
Tel: (215) 657-5600

PUERTO RICO

Intel Microprocessor Corp.
South Industrial Park
Las Piedras 00721
Tel: (809) 733-3030

TEXAS

Intel Corp.
313 E. Anderson Lane
Suite 314
Austin 78752
Tel: (512) 454-3628

Intel Corp.*
12300 Ford Road
Suite 350
Dallas 75234
Tel: (214) 241-8087
Tel: (914) 297-6161
TWX: 910-850-5617

Intel Corp.*
7222 S.W. Freeway
Suite 1490
Houston 77074
Tel: (713) 968-8086
TWX: 910-881-2490

Industrial Digital Systems Corp.
5925 Sovereign
Suite 101
Houston 77036
Tel: (713) 988-9421

UTAH

Intel Corp.
5201 Green Street
Suite 290
Murray 84123
Tel: (801) 263-8051

VIRGINIA

Intel Corp.
1603 Santa Rosa Road
Suite 109
Richmond 23288
Tel: (804) 282-5668

WASHINGTON

Intel Corp.
110 110th Avenue N.E.
Suite 510
Bellevue 98004
Tel: (206) 453-8086
TWX: 910-443-3002

Intel Corp.
408 N. Mullan Road
Suite 102
Spokane 99206
Tel: (509) 928-8086

WISCONSIN

Intel Corp.
450 N. Sunnyslope Road
Suite 130
Chancellor Park I
Brookfield 53005
Tel: (414) 784-8087

CANADA

BRITISH COLUMBIA

Intel Semiconductor of Canada, Ltd.
301-2245 W. Broadway
Vancouver V6K 2E4
Tel: (604) 738-6522

ONTARIO

Intel Semiconductor of Canada, Ltd.
2650 Queensview Drive
Suite 250
Ottawa K2B 8H6
Tel: (613) 823-9714
TELEX: 050-4115

Intel Semiconductor of Canada, Ltd.
190 Atwell Drive
Suite 500
Rexdale M9W 6H8
Tel: (416) 675-2105
TELEX: 06983574

QUEBEC

Intel Semiconductor of Canada, Ltd.
620 St. Jean Blvd.
Pointe Claire H9T 3K3
Tel: (514) 684-9150
TWX: 514-694-9134

*Field Application Location



EUROPEAN SALES OFFICES

BELGIUM

Intel Corporation S.A.
Parc Sery
Rue du Moulin a Papier 51
Boite 1
B-1160 Brussels
Tel (02)661 07 11
TELEX 24814

DENMARK

Intel Denmark A/S*
Gjentevej 61 - 3rd Floor
DK-2400 Copenhagen
Tel (01) 19 80 33
TELEX 19567

FINLAND

Intel Finland Oy
Rousilantie 2
SF-00390 Helsingfors 39
Tel (90) 544 644
TELEX 123 332

FRANCE

Intel Paris
1, rue Edison, BP 303
78054 Saint-Quentin en Yvelines
Tel (3) 064 60 00
TELEX 699016

FRANCE (Cont'd)

Intel Corporation S.A.R.L.
Immeuble BBC
4 Club des Etoiles
69005 Lyon
Tel (7) 842 40 89
TELEX 305153

WEST GERMANY

Intel Semiconductor GmbH*
Siedlarstrasse 27
D-8000 Munchen 2
Tel (89) 53891
TELEX 05-23177 INTL D

Intel Semiconductor GmbH*
Manzerstrasse 75
D-6200 Wiesbaden 1
Tel (6121) 70 08 74
TELEX 04166183 INTW D

Intel Semiconductor GmbH
Bruckstrasse 61
7012 Fellbach
Stuttgart
Tel (711) 58 00 82
TELEX 7254826 INTS D

Intel Semiconductor GmbH*
Hohenzollernstrasse 5*
3000 Hannover 1
Tel (511) 34 40 81
TELEX 923625 INTH D

ISRAEL

Intel Semiconductors Ltd*
Aldim Industrial Park
Neve Sharef
Dvora Haneva
Bldg No 13 4th Floor
P.O. Box 43202
Tel Aviv 61430
Tel 3-491099
Telex 371215

ITALY

Intel Corporation Italia Spa*
Milanofori Palazza E
20094 Assago (Milano)
Tel (02) 824 00 06
TELEX 315183 INTMIL

NETHERLANDS

Intel Semiconductor Nederland B.V.*
Alexanderpoort Building
Marten Meesweg 83
3068 Rotterdam
Tel (0) 21 23 77
TELEX 52283

NORWAY

Intel Norway A/S
P.O. Box 92
Hvamveien 4
N-2013
Skjetten
Tel (2) 742 420
TELEX 18018

SPAIN

Intel Iberia
Calle Zurbaran 28
Madrid 04
Tel (34) 1410 40 04
TELEX 46880

SWEDEN

Intel Sweden A.B.*
Dalvagen 24
S-171 36 Sona
Tel (08) 734 01 00
TELEX 12261

SWITZERLAND

Intel Semiconductor A.G.*
Talackerstrasse 17
8152 Glattpfurg postfach
CH-8005 Zurich
Tel (01) 829 29 77
TELEX 57989 ICH CH

UNITED KINGDOM

Intel Corporation (U.K.) Ltd.*
Pipers Way
Swindon, Wiltshire SN3 1RJ
Tel (0793) 488 388
TELEX 444447 INT SWN

*Field Application Location

EUROPEAN DISTRIBUTORS/REPRESENTATIVES

AUSTRIA

Bacher Elektronische Gerate GmbH
Reinmuhngasse 26
A-1120 Wien
Tel (222) 83 56 46
TELEX 11532 BASAT A

W. Moor GmbH
Storchengasse 1/1/1
A-1150 Wien
Tel 222-85 86 46

BELGIUM

Inelco Belgium S.A.
Ave. des Croix de Guerre 94
B-1120 Brussels
Tel (021) 216 01 60
TELEX 25441

DENMARK

ITT MultiKomponent A/S
Naverland 29
DK-2600 Glostrup
Tel (02) 45 66 45
TX 33355

FINLAND

Oy Finronic AB
Melkonkallu 24 A
SF-00210 Helsinki 21
Tel (0) 892 80 22
TELEX 124 224 Fira SF

FRANCE

Genemir
Z.I. de Courtaubeouf
Avenue de la Baltique
F-91943 Les Ulis Cedex-B.P.88
Tel (1) 907 78 78
TELEX: F691700

Jermyn S.A.
16, Avenue de Jean-Jaures
F-94600 Choisy-Le-Roi
Tel (1) 853 12 00
TELEX: 260 967

Metrologie

La Tour d'Asnieres
4, Avenue Laurent Cely
F-92606-Asnieres
Tel (1) 790 62 40
TELEX: 611448

Takelec Airtronic
Cite des Bruyeres
Rue Carle Vernet B.P. 2
F-92310 Sevres
Tel (1) 534 75 35
TELEX: 204552

WEST GERMANY

Electronic 2000 Vertriebs AG
Stahnguberring 12
D-8000 Munch 82
Tel (89) 42 00 10
TELEX 522561 EEC D

Jermyn GmbH
Postfach 11 80
Schulstrasse 84
D-6277 Bad Camberg
Tel (0634) 231
TELEX 484426 JERM D

CES Computer Electronics Systems
GmbH
Gutenbergrasse 4
D-2359 Henstedt-Ulzburg
Tel (04193) 4026
TELEX: 2180260

Metrologie GmbH
Hansastrasse 15
D-8000 Munch 21
Tel (89) 57 30 84
TELEX: 5213189

Proelectron Vertriebs GmbH
Max Planck Strasse 1-3
D-6072 Dreieich
Tel (6103) 33564
TELEX: 417983

IRELAND

Micro Marketing
Glenagary Office Park
Glenagary
Co. Dublin
Tel (1) 85 62 88
TELEX: 31584

ISRAEL

Eastronics Ltd
11 Sozans Street
P.O. Box 39300
Tel Aviv 61390
Tel (1) 47 51 51
TELEX: 33638

ITALY

Electra 3S S.P.A.
Viale Elvezio, 18
I 20154 Milano
Tel (2) 34 97 51
TELEX: 332332

Inesi
Milanofori Pal. E/5
I-20090 Assago
Milano
Tel: (2) 82470
TELEX: 311351

NETHERLANDS

Koning & Hartman
Koperwert 30
P.O. Box 43202
2544 EN's Gravenhage
Tel 31 (70) 210101
TELEX 31528

NORWAY

Nordisk Elektronic (Norge) A/S
Postoffice Box 122
Smedsvingstad
1364 Hvalstad
Tel (02) 846 210
TELEX: 17546

PORTUGAL

Ditram
Componentes E Electronica LDA
Av. Miguel Bombarda, 133
P-1000 Lisboa
Tel (19) 545 313
TELEX: 14182 Bneks-P

SPAIN

Interface S.A.
Av. Pompeu Fabra 12
08024 Barcelona
Tel (3) 219 80 11
TELEX 51508

ITT SESA
Miguel Angel 21, 6 Piso
Madrid 10
Tel (34) 14 1954 00
TELEX 27461

Diode Espana
Avenida De Brasil 5
28020 Madrid
Tel 455 36 86
TELEX: 42148

SWEDEN

AB Gosta Backstrom
Box 12009
Astroergatan 22
S-10221 Stockholm
Tel (08) 541 080
TELEX: 10135

Nordisk Elektronik AB
Box 1409
Huvudstagan 1
171 27 Solna
Tel (08) 734 97 70
TELEX: 10547

SWITZERLAND

Industrade AG
Herbststrasse 31
CH-8304 Wetzellen
Tel (01) 830 50 40
TELEX 56788 INDEL CH

UNITED KINGDOM

Bytech Ltd
Unit 57
London Road
Early Reading
Berkshire
Tel (0734) 61031
TELEX: 848215

Conway Microsystems Ltd.
Market Street
UK-Blackburn Berkshire
Tel 44 (344) 55333
TELEX: 847201

Jermyn Industries
Vestry Estate
Sevenoaks, Kent
Tel (0732) 450144
TELEX: 95142

M.E.D.L.
East Lane Road
North Wembley
Middlesex HA9 7PP
Tel (190) 49307
TELEX: 28017

Rapid Recall, Ltd.
Rapid House/Denmark St
High Wycombe
Berk, England HP11 2ER
Tel: (494) 26 271
TELEX: 837931

YUGOSLAVIA

H. R. Microelectronics Enterprises
P.O. Box 5604
San Jose, California 95150
Tel: 408/978-8000
TELEX: 278-559



UNITED STATES

Intel Corporation
3065 Bowers Avenue
Santa Clara, CA 95051

JAPAN

Intel Japan K.K.
5-6 Tokodai Toyosato-machi
Tsukuba-gun, Ibaraki-ken 300-26
Japan

FRANCE

Intel
5 Place de la Balance
Silic 223
94528 Rungis Cedex
France

UNITED KINGDOM

Intel
Piper's Way
Swindon
Wiltshire, England SN3 1RJ

WEST GERMANY

Intel
Seidstrasse 27
D-8000 Munchen 2
West Germany