

Radiation Hardened, High Performance Industry Standard Single-Ended Current Mode PWM Controller

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

The ISL7884xASRH is a high performance, radiation hardened drop-in replacement for the popular 28C4x and 18C4x PWM controllers suitable for a wide range of power conversion applications including boost, flyback, and isolated output configurations. Its fast signal propagation and output switching characteristics make this an ideal product for existing and new designs.

Features include up to 13.2V operation, low operating current, 90µA typical start-up current, adjustable operating frequency to 1MHz, and high peak current drive capability with 50ns rise and fall times.

PART NUMBER	RISING UVLO	MAX. DUTY CYCLE
ISL78840ASRH	7.0	100%
ISL78841ASRH	7.0	50%
ISL78843ASRH	8.4V	100%
ISL78845ASRH	8.4V	50%

Specifications for Rad Hard QML devices are controlled by the Defense Logistics Agency Land and Maritime (DLA). The SMD numbers listed in the ordering information must be used when ordering.

Detailed Electrical Specifications for the ISL788xASRH are contained in [SMD 5962-07249](#). A "hot-link" is provided on our website for downloading.

Features


- Electrically Screened to DLA SMD # 5962-07249
- QML Qualified Per MIL-PRF-38535 Requirements
- 1A MOSFET Gate Driver
- 90µA Typical Start-up Current, 125µA Max
- 35ns Propagation Delay Current Sense to Output
- Fast Transient Response with Peak Current Mode Control
- 9V to 13.2V Operation
- Adjustable Switching Frequency to 1MHz
- 50ns Rise and Fall Times with 1nF Output Load
- Trimmed Timing Capacitor Discharge Current for Accurate Deadtime/Maximum Duty Cycle Control
- 1.5MHz Bandwidth Error Amplifier
- Tight Tolerance Voltage Reference Over Line, Load and Temperature
- ±3% Current Limit Threshold
- Pb-Free Available (RoHS Compliant)

Applications


- Current Mode Switching Power Supplies
- Isolated Buck and Flyback Regulators
- Boost Regulators
- Direction and Speed Control in Motors
- Control of High Current FET Drivers

Pin Configurations

ISL78840ASRH, ISL78841ASRH,
ISL78843ASRH, ISL78845ASRH
(8 LD FLATPACK)
TOP VIEW

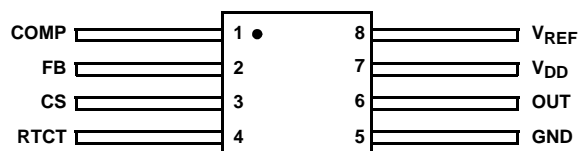

ISL78840ASRH, ISL78841ASRH,
ISL78843ASRH, ISL78845ASRH
(8 LD SBDIP)
TOP VIEW



ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH


Ordering Information

ORDERING NUMBER	PART NUMBER	TEMP. RANGE (°C)	PACKAGE (Pb-Free)	PKG. DWG. #
ISL78840ASRHVX/SAMPLE	ISL78840ASRHVX/SAMPLE	-55 to +125	Die	
ISL78840ASRHF/PROTO	ISL78840ASRHF/PROTO (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724901QXC	ISL78840ASRHQF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724901VXC	ISL78840ASRHVF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
ISL78840ASRHD/PROTO	ISL78840ASRHD/PROTO (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724901QPC	ISL78840ASRHQD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724901VPC	ISL78840ASRHVD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
ISL78841ASRHVX/SAMPLE	ISL78841ASRHVX/SAMPLE	-55 to +125	Die	
ISL78841ASRHF/PROTO	ISL78841ASRHF/PROTO (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724902QXC	ISL78841ASRHQF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724902VXC	ISL78841ASRHVF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
ISL78841ASRHD/PROTO	ISL78841ASRHD/PROTO (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724902QPC	ISL78841ASRHQD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724902VPC	ISL78841ASRHVD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
ISL78843ASRHVX/SAMPLE	ISL78843ASRHVX/SAMPLE	-55 to +125	Die	
ISL78843ASRHF/PROTO	ISL78843ASRHF/PROTO (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724903QXC	ISL78843ASRHQF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724903VXC	ISL78843ASRHVF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
ISL78843ASRHD/PROTO	ISL78843ASRHD/PROTO (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724903QPC	ISL78843ASRHQD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724903VPC	ISL78843ASRHVD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
ISL78845ASRHVX/SAMPLE	ISL78845ASRHVX/SAMPLE	-55 to +125	Die	
ISL78845ASRHF/PROTO	ISL78845ASRHF/PROTO (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724904QXC	ISL78845ASRHQF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
5962R0724904VXC	ISL78845ASRHVF (Notes 1, 2)	-55 to +125	8 Ld Flatpack	K8.A
ISL78845ASRHD/PROTO	ISL78845ASRHD/PROTO (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724904QPC	ISL78845ASRHQD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3
5962R0724904VPC	ISL78845ASRHVD (Notes 1, 2)	-55 to +125	8 Ld SBDIP	D8.3


NOTES:

1. These Intersil Pb-free Hermetic packaged products employ 100% Au plate - e4 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations.
2. For Moisture Sensitivity Level (MSL), please see device information page for [ISL78840ASRH](#), [ISL78841ASRH](#), [ISL78843ASRH](#), [ISL78845ASRH](#). For more information on MSL please see techbrief [TB363](#).

Functional Block Diagram

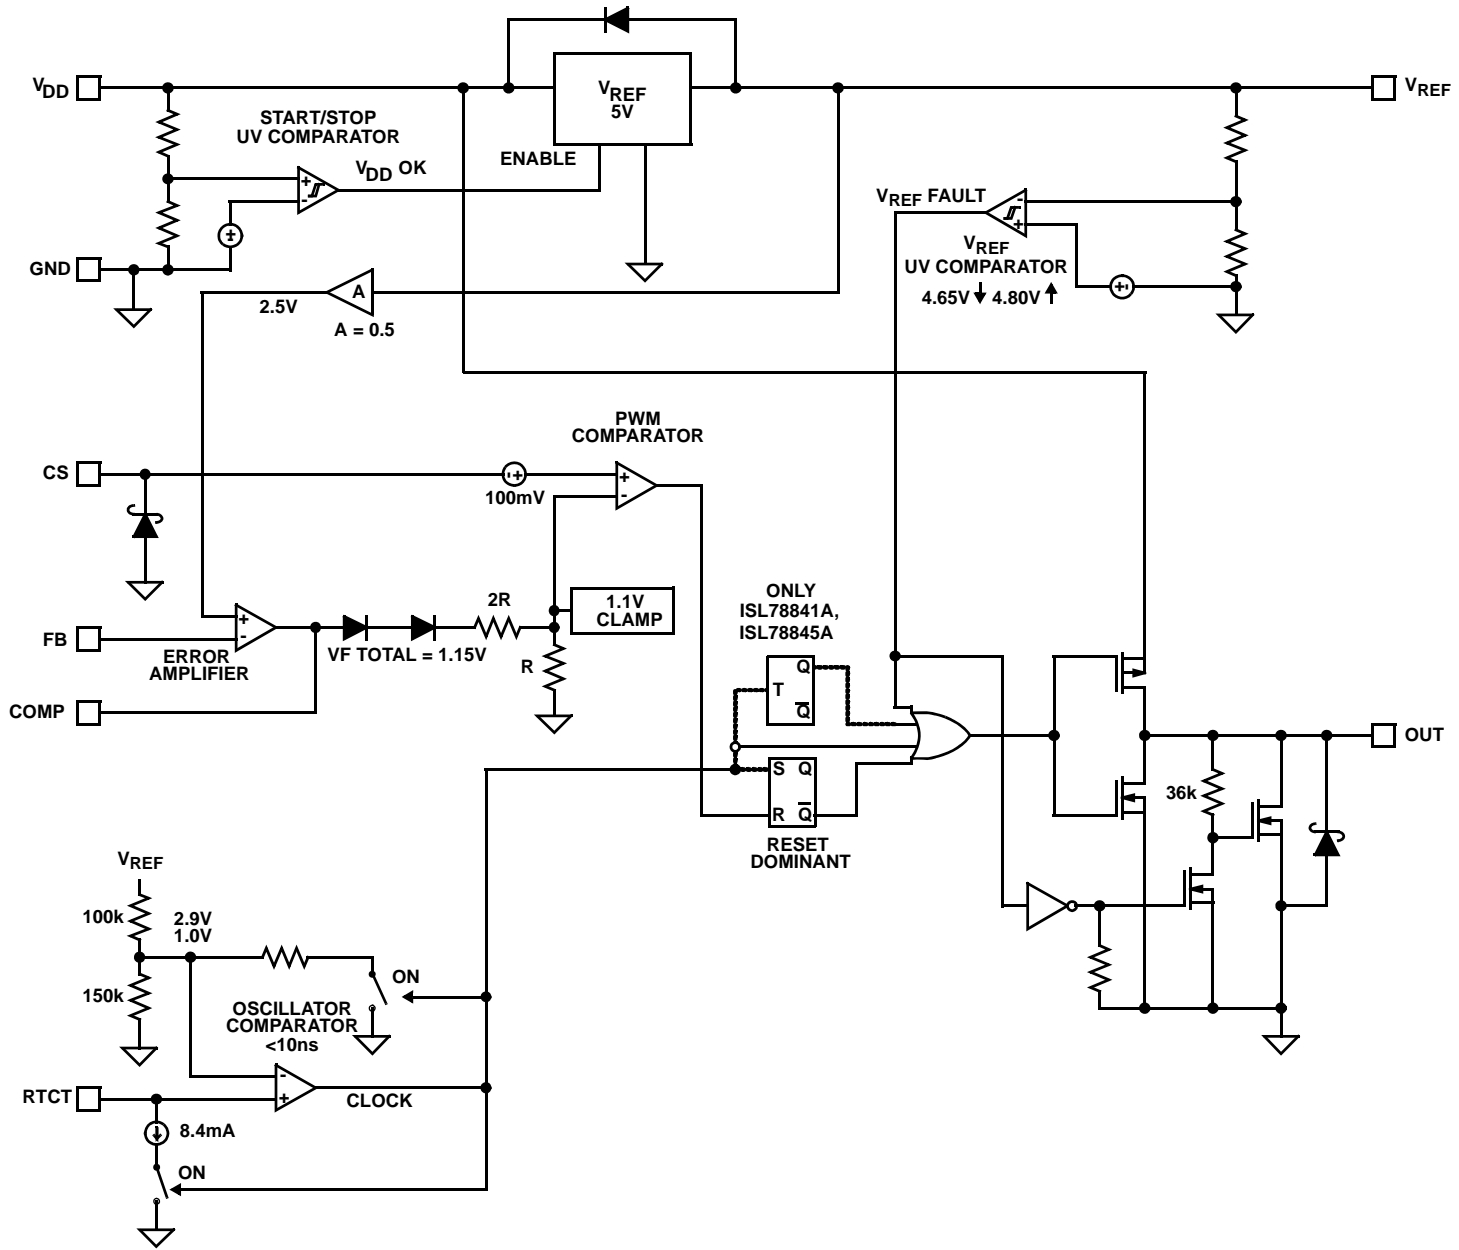


Typical Application - 48V Input Dual Output Flyback

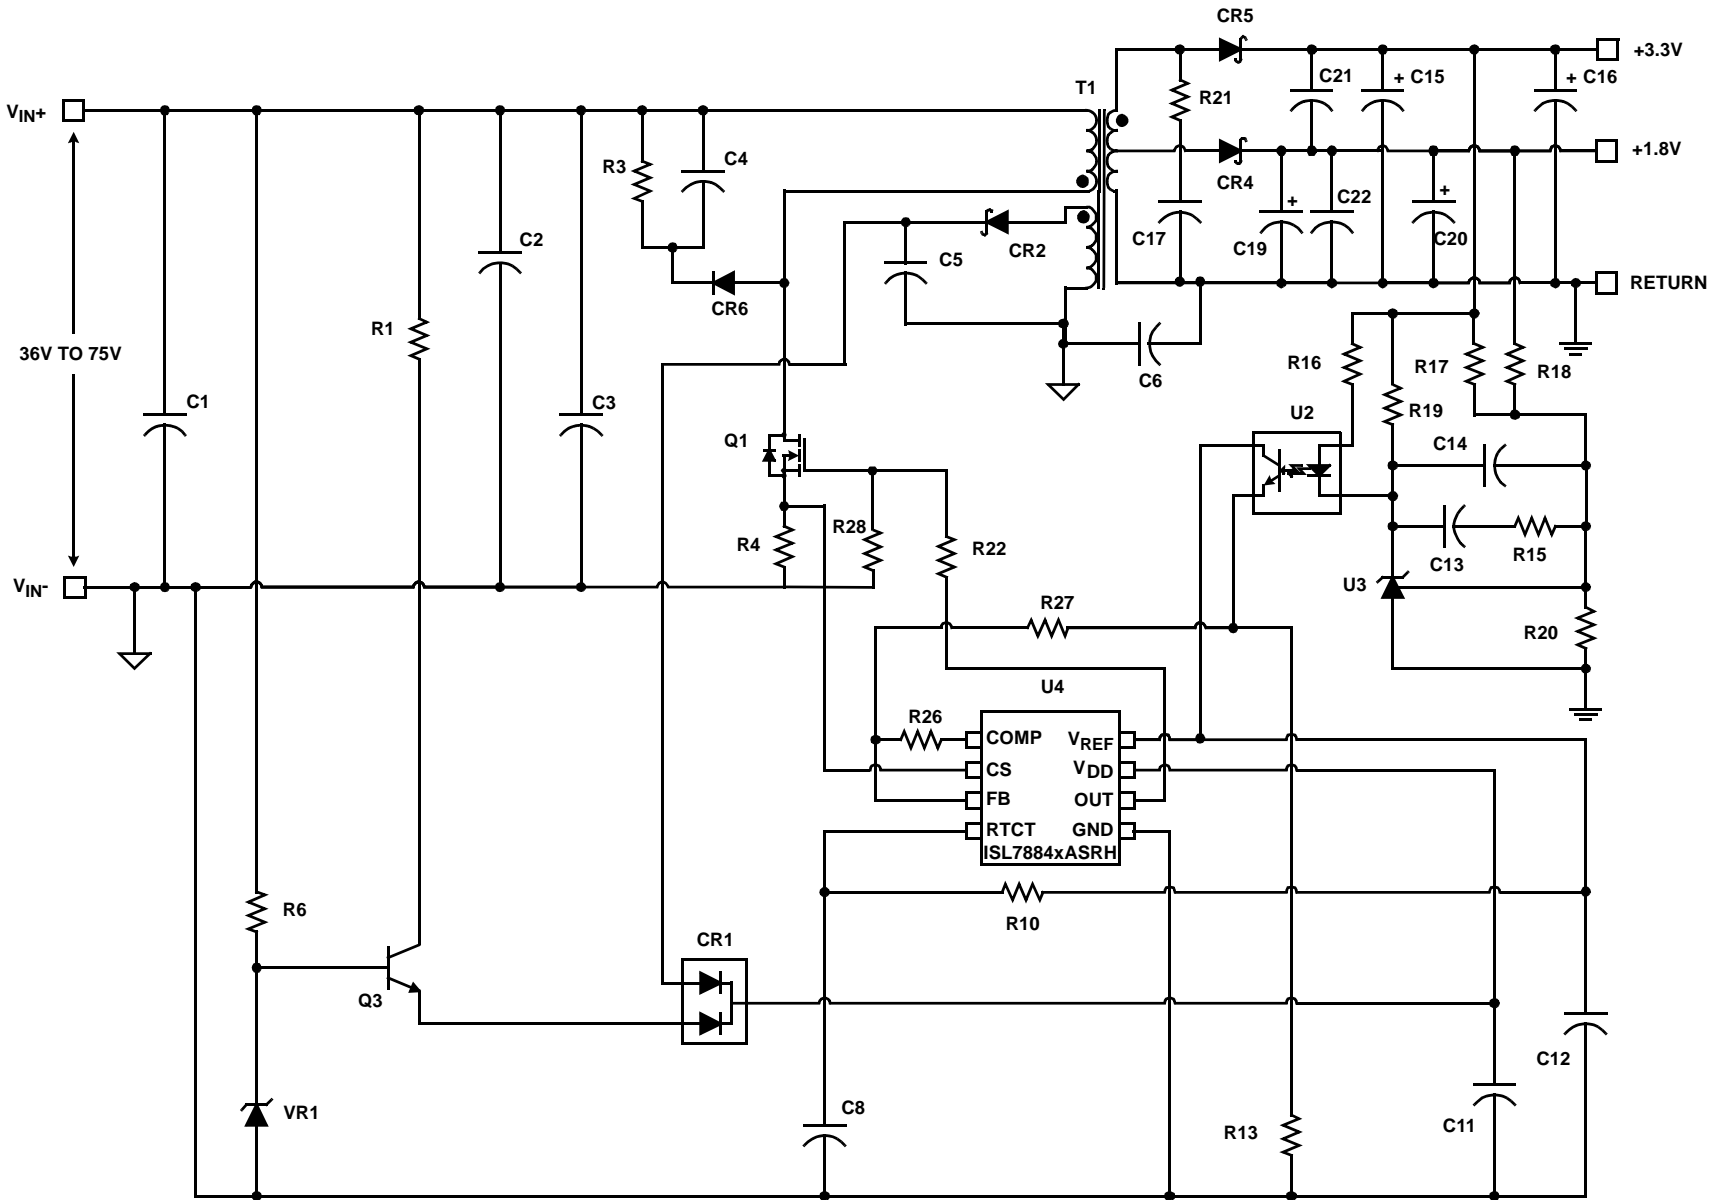

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

Typical Application - Boost Converter

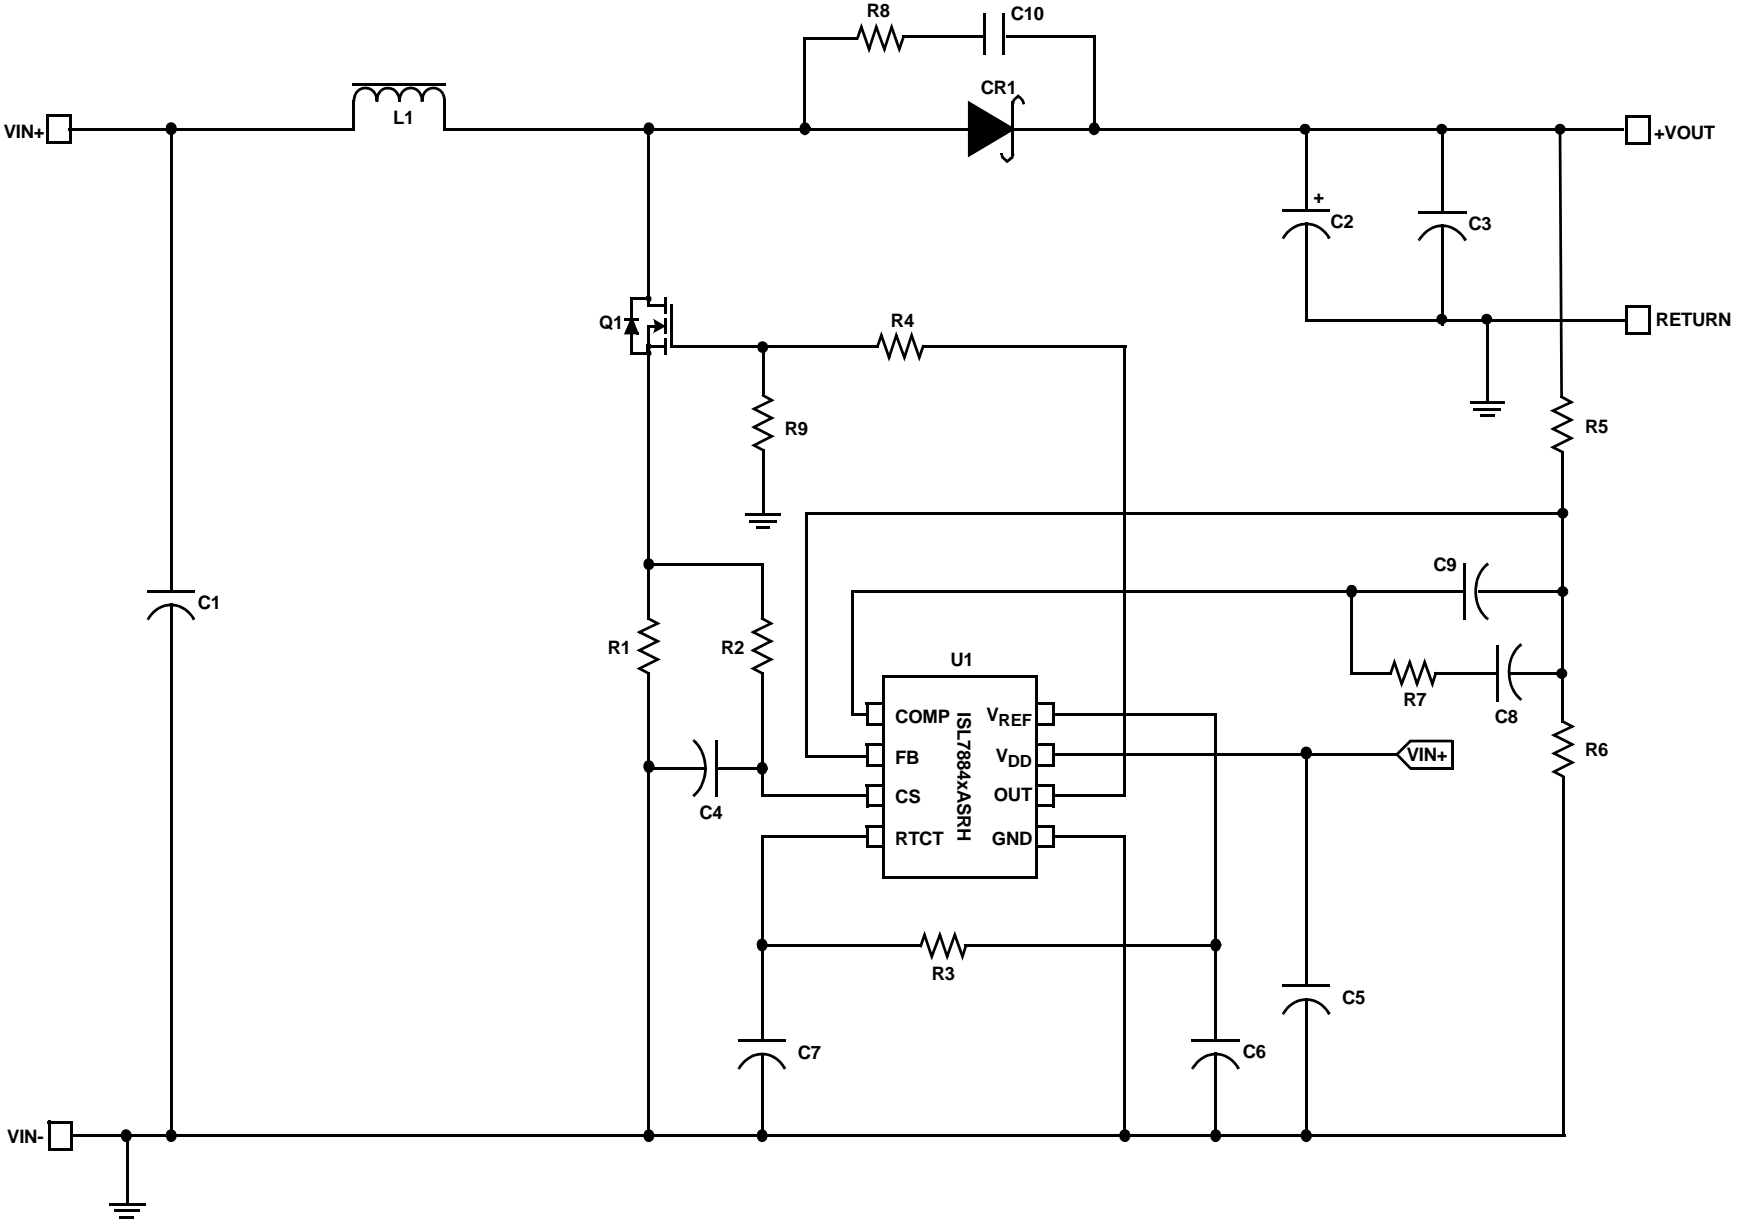

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

Absolute Maximum Ratings

Supply Voltage V_{DD} Without Ion Beam	GND -0.3V to +30.0V
Supply Voltage V_{DD} Under Ion Beam	GND -0.3V to +14.7V
OUT	GND -0.3V to $V_{DD} + 0.3V$
Signal Pins	GND -0.3V to 6.0V
Peak GATE Current	1A
ESD Rating	
Human Body Model (Tested per JESD22-A114E)	2kV
Machine Model (Tested per JESD22-A115-A)	200V
Latch Up (Tested per JESD-78B; Class 2, Level A)	100mA

Recommended Operating Conditions

Temperature Range	-55°C to +125°C
Supply Voltage (Typical Note 6)	9V to 13.2V

Thermal Information

Thermal Resistance (Typical)	θ_{JA} (°C/W)	θ_{JC} (°C/W)
8 Ld Flatpack Package (Notes 3, 5)	140	15
8 Ld SBDIP Package (Notes 4, 5)	98	15
Maximum Junction Temperature (Plastic Package)	+150°C	
Storage Temperature Range	-65°C to +150°C	
Pb-Free Reflow Profile	see link below http://www.intersil.com/pbfree/Pb-FreeReflow.asp	

Radiation Information

Maximum Total Dose	
(Dose Rate = 50 - 100radSi/s)	100 krad (Si)
SEB (No Burnout) (Note 6)	80Mev/mg/cm2
SEL (No latchup) (Note 6)	80Mev/mg/cm2
SET (Regulated V_{OUT} within ±3%) (Note 9)	40Mev/mg/cm2

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

NOTES:

- θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief [TB379](#) for details.
- θ_{JA} is measured with the component mounted on a low effective thermal conductivity test board in free air. See Tech Brief [TB379](#) for details.
- For θ_{JC} , the "case temp" location is the center of the ceramic on the package underside.
- All voltages are with respect to GND.

Electrical Specifications Recommended operating conditions unless otherwise noted. Refer to Block Diagram and Typical Application schematic on page 3 and page 4. $V_{DD} = 13.2V$, $R_T = 10k\Omega$, $C_T = 3.3nF$, $T_A = -55$ to $+125^\circ C$. Typical values are at $T_A = +25^\circ C$. **Boldface limits apply over the operating temperature range, -55 to +125°C.**

PARAMETER	TEST CONDITIONS	MIN (Note 10)	TYP	MAX (Note 10)	UNITS
UNDERVOLTAGE LOCKOUT					
START Threshold	ISL78840A, ISL78841A	6.5	7.0	7.5	V
	ISL78843A, ISL78845A	8.0	8.4	9.0	V
STOP Threshold	ISL78840A, ISL78841A	6.1	6.6	6.9	V
	ISL78843A, ISL78845A	7.3	7.6	8.0	V
Hysteresis	ISL78840A, ISL78841A	-	0.4	-	V
	ISL78843A, ISL78845A	-	0.8	-	V
Start-up Current, I_{DD}	$V_{DD} < \text{START Threshold}$	-	90	125	μA
	$V_{DD} < \text{START Threshold}, 100\text{krad}$	-	300	500	μA
Operating Current, I_{DD}	(Note 7)	-	2.9	4.0	mA
Operating Supply Current, I_D	Includes 1nF GATE loading	-	4.75	5.5	mA
REFERENCE VOLTAGE					
Overall Accuracy	Over line ($V_{DD} = 9V$ to $13.2V$), load of 1mA and 10mA, temperature	4.925	5.000	5.050	V
Long Term Stability	$T_A = +125^\circ C$, 1000 hours (Note 8)	-	5	-	mV
Current Limit, Sourcing		-20	-	-	mA
Current Limit, Sinking		5	-	-	mA
CURRENT SENSE					
Input Bias Current	$V_{CS} = 1V$	-1.0	-	1.0	μA
Input Signal, Maximum		0.97	1.00	1.03	V
Gain, $A_{CS} = \Delta V_{COMP} / \Delta V_{CS}$	$0 < V_{CS} < 910mV$, $V_{FB} = 0V$	2.75	2.82	3.15	V/V
CS to OUT Delay		-	35	55	ns

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

Electrical Specifications Recommended operating conditions unless otherwise noted. Refer to Block Diagram and Typical Application schematic on page 3 and page 4. $V_{DD} = 13.2V$, $R_T = 10k\Omega$, $C_T = 3.3nF$, $T_A = -55$ to $+125^\circ C$. Typical values are at $T_A = +25^\circ C$. **Boldface limits apply over the operating temperature range, -55 to +125°C. (Continued)**

PARAMETER	TEST CONDITIONS	MIN (Note 10)	TYP	MAX (Note 10)	UNITS
ERROR AMPLIFIER					
Open Loop Voltage Gain	(Note 8)	-	90	-	dB
Unity Gain Bandwidth	(Note 8)	-	1.5	-	MHz
Reference Voltage, V_{REF}	$V_{FB} = V_{COMP}$	2.475	2.500	2.530	V
FB Input Bias Current, FBI_{IB}	$V_{FB} = 0V$	-1.0	-0.2	1.0	μA
COMP Sink Current	$V_{COMP} = 1.5V$, $V_{FB} = 2.7V$	1.0	-	-	mA
COMP Source Current	$V_{COMP} = 1.5V$, $V_{FB} = 2.3V$	-0.4	-	-	mA
COMP VOH	$V_{FB} = 2.3V$	4.80	-	V_{REF}	V
COMP VOL	$V_{FB} = 2.7V$	0.4	-	1.0	V
PSRR	Frequency = 120Hz, $V_{DD} = 9V$ to 13.2V (Note 8)	-	80	-	dB
OSCILLATOR					
Frequency Accuracy	Initial, $T_A = +25^\circ C$	48	51	53	kHz
Frequency Variation with V_{DD}	$T_A = +25^\circ C$, $(f_{13.2V} - f_{9V})/f_{12V}$	-	0.2	1.0	%
Temperature Stability	(Note 8)	-	5	-	%
Amplitude, Peak-to-Peak	Static Test	-	1.75	-	V
RTCT Discharge Voltage (Valley Voltage)	Static Test	-	1.0	-	V
Discharge Current	RTCT = 2.0V	6.5	7.8	8.5	mA
OUTPUT					
Gate VOH	V_{DD} to OUT, $I_{OUT} = -100mA$	-	1.0	2.0	V
Gate VOL	OUT to GND, $I_{OUT} = 100mA$	-	1.0	2.0	V
Peak Output Current	$C_{OUT} = 1nF$ (Note 8)	-	1.0	-	A
Rise Time	$C_{OUT} = 1nF$	-	35	60	ns
Fall Time	$C_{OUT} = 1nF$	-	20	40	ns
OUTPUT OFF state leakage	$V_{DD} = 5V$	-	-	50	μA
PWM					
Maximum Duty Cycle (ISL78840A, ISL78843A)	COMP = V_{REF}	94.0	96.0	-	%
Maximum Duty Cycle (ISL78841A, ISL78845A)	COMP = V_{REF}	47.0	48.0	-	%
Minimum Duty Cycle	COMP = GND	-	-	0	%

NOTES:

- This is the V_{DD} current consumed when the device is active but not switching. Does not include gate drive current.
- Limits established by characterization and are not production tested.
- SEE tests performed with V_{REF} bypass capacitor of $0.22\mu F$ and $F_{SW} = 200kHz$. SEB/L tests done on a standalone open loop configuration. SET tests done in a closed loop configuration. For SEL no hard latch requiring manual intervention were observed. For more information see: [ISL7884xASRH SEE Test Report](#).
- Parameters with MIN and/or MAX limits are 100% tested at $+25^\circ C$, unless otherwise specified. Temperature limits established by characterization and are not production tested.

Typical Performance Curves

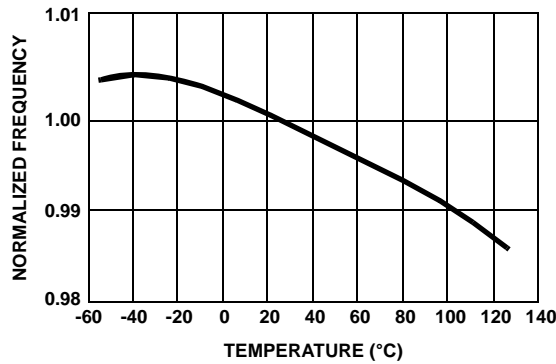


FIGURE 1. FREQUENCY vs TEMPERATURE

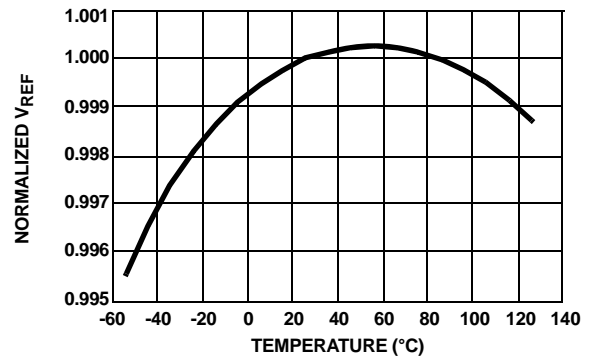


FIGURE 2. REFERENCE VOLTAGE vs TEMPERATURE

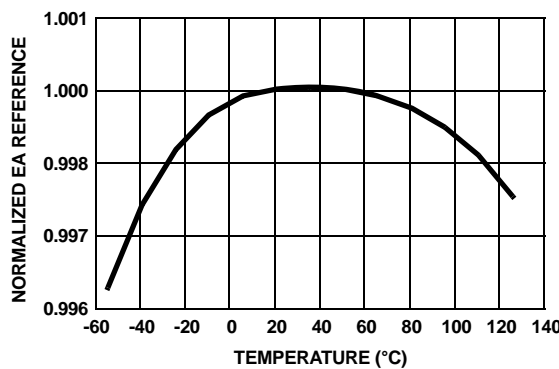


FIGURE 3. EA REFERENCE vs TEMPERATURE

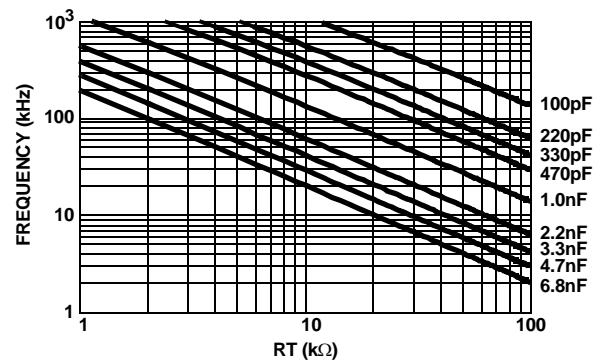


FIGURE 4. RESISTANCE FOR CT CAPACITOR VALUES GIVEN

Pin Descriptions

RTCT - This is the oscillator timing control pin. The operational frequency and maximum duty cycle are set by connecting a resistor, R_T , between V_{REF} and this pin and a timing capacitor, C_T , from this pin to GND. The oscillator produces a sawtooth waveform with a programmable frequency range up to 2.0MHz. The charge time, t_C , the discharge time, t_D , the switching frequency, f , and the maximum duty cycle, D_{MAX} , can be approximated from Equations 1 through 4:

$$t_C \approx 0.533 \cdot R_T \cdot C_T \quad (\text{EQ. 1})$$

$$t_D \approx -R_T \cdot C_T \cdot \ln\left(\frac{0.008 \cdot R_T - 3.83}{0.008 \cdot R_T - 1.71}\right) \quad (\text{EQ. 2})$$

$$f = 1/(t_C + t_D) \quad (\text{EQ. 3})$$

$$D = t_C \cdot f \quad (\text{EQ. 4})$$

The formulae have increased error at higher frequencies due to propagation delays. Figure 4 may be used as a guideline in selecting the capacitor and resistor values required for a given switching frequency for the ISL78841ASRH, ISL78845ASRH. The value for the ISL78840ASRH, ISL78843ASRH will be twice that shown in Figure 4.

COMP - COMP is the output of the error amplifier and the input of the PWM comparator. The control loop frequency compensation network is connected between the COMP and FB pins.

FB - The output voltage feedback is connected to the inverting input of the error amplifier through this pin. The non-inverting input of the error amplifier is internally tied to a reference voltage.

CS - This is the current sense input to the PWM comparator. The range of the input signal is nominally 0V to 1.0V and has an internal offset of 100mV.

GND - GND is the power and small signal reference ground for all functions.

OUT - This is the drive output to the power switching device. It is a high current output capable of driving the gate of a power MOSFET with peak currents of 1.0A. This GATE output is actively held low when V_{DD} is below the UVLO threshold.

V_{DD} - V_{DD} is the power connection for the device. The total supply current will depend on the load applied to OUT. Total I_{DD} current is the sum of the operating current and the average output current. Knowing the operating frequency, f , and the MOSFET gate charge, Q_g , the average output current can be calculated from Equation 5:

$$I_{OUT} = Q_g \cdot f \quad (\text{EQ. 5})$$

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

To optimize noise immunity, bypass V_{DD} to GND with a ceramic capacitor as close to the V_{DD} and GND pins as possible.

V_{REF} - The 5.00V reference voltage output. +1.0/-1.5% tolerance over line, load and operating temperature. The recommended bypass to GND cap is in the range 0.1 μ F to 0.22 μ F. A typical value of 0.15 μ F can be used.

Functional Description

Features

The ISL7884xASRH current mode PWM makes an ideal choice for low-cost flyback and forward topology applications. With its greatly improved performance over industry standard parts, it is the obvious choice for new designs or existing designs which require updating.

Oscillator

The ISL7884xASRH has a sawtooth oscillator with a programmable frequency range to 2MHz, which can be programmed with a resistor from V_{REF} and a capacitor to GND on the RTCT pin. (Please refer to Figure 4 for the resistor and capacitance required for a given frequency).

Soft-Start Operation

Soft-start must be implemented externally. One method, illustrated below, clamps the voltage on COMP.

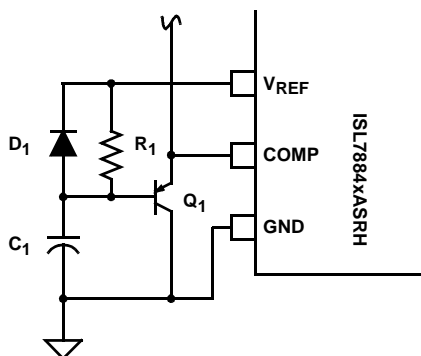


FIGURE 5. SOFT-START

The COMP pin is clamped to the voltage on capacitor C_1 plus a base-emitter junction by transistor Q_1 . C_1 is charged from V_{REF} through resistor R_1 and the base current of Q_1 . At power-up C_1 is fully discharged, COMP is at $\sim 0.7V$, and the duty cycle is zero. As C_1 charges, the voltage on COMP increases, and the duty cycle increases in proportion to the voltage on C_1 . When COMP reaches the steady state operating point, the control loop takes over and soft-start is complete. C_1 continues to charge up to V_{REF} and no longer affects COMP. During power-down, diode D_1 quickly discharges C_1 so that the soft-start circuit is properly initialized prior to the next power-on sequence.

Gate Drive

The ISL7884xASRH is capable of sourcing and sinking 1A peak current. To limit the peak current through the IC, an optional external resistor may be placed between the totem-pole output of the IC (OUT pin) and the gate of the MOSFET. This small series

resistor also damps any oscillations caused by the resonant tank of the parasitic inductances in the traces of the board and the FET's input capacitance. TID environment of >50krads requires the use of a bleeder resistor of 10k from the OUT pin to GND.

Slope Compensation

For applications where the maximum duty cycle is less than 50%, slope compensation may be used to improve noise immunity, particularly at lighter loads. The amount of slope compensation required for noise immunity is determined empirically, but is generally about 10% of the full scale current feedback signal. For applications where the duty cycle is greater than 50%, slope compensation is required to prevent instability.

Slope compensation may be accomplished by summing an external ramp with the current feedback signal or by subtracting the external ramp from the voltage feedback error signal. Adding the external ramp to the current feedback signal is the more popular method.

From the small signal current-mode model [1] it can be shown that the naturally-sampled modulator gain, F_m , without slope compensation is calculated in Equation 6:

$$F_m = \frac{1}{S_n t_{sw}} \quad (\text{EQ. 6})$$

where S_n is the slope of the sawtooth signal and t_{sw} is the duration of the half-cycle. When an external ramp is added, the modulator gain becomes Equation 7:

$$F_m = \frac{1}{(S_n + S_e)t_{sw}} = \frac{1}{m_c S_n t_{sw}} \quad (\text{EQ. 7})$$

where S_e is slope of the external ramp and becomes Equation 8:

$$m_c = 1 + \frac{S_e}{S_n} \quad (\text{EQ. 8})$$

The criteria for determining the correct amount of external ramp can be determined by appropriately setting the damping factor of the double-pole located at the switching frequency. The double-pole will be critically damped if the Q-factor is set to 1, over-damped for $Q < 1$, and under-damped for $Q > 1$. An under-damped condition may result in current loop instability.

$$Q = \frac{1}{\pi(m_c(1-D) - 0.5)} \quad (\text{EQ. 9})$$

where D is the percent of on-time during a switching cycle. Setting $Q = 1$ and solving for S_e yields Equation 10:

$$e = S_n \left(\left(\frac{1}{\pi} + 0.5 \right) \frac{1}{1-D} - 1 \right) \quad (\text{EQ. 10})$$

Since S_n and S_e are the on-time slopes of the current ramp and the external ramp, respectively, they can be multiplied by t_{ON} to obtain the voltage change that occurs during t_{ON} .

$$V_e = V_n \left(\left(\frac{1}{\pi} + 0.5 \right) \frac{1}{1-D} - 1 \right) \quad (\text{EQ. 11})$$

where V_n is the change in the current feedback signal (ΔI) during the on-time and V_e is the voltage that must be added by the external ramp.

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

For a flyback converter, V_n can be solved in terms of input voltage, current transducer components, and primary inductance, yielding Equation 12:

$$V_e = \frac{D \cdot T_{sw} \cdot V_{IN} \cdot R_{CS}}{L_p} \left(\left(\frac{1}{\pi} + 0.5 \right) \frac{1}{1-D} - 1 \right) \quad V \quad (\text{EQ. 12})$$

where R_{CS} is the current sense resistor, T_{sw} is the switching period, L_p is the primary inductance, V_{IN} is the minimum input voltage, and D is the maximum duty cycle.

The current sense signal at the end of the ON time for CCM operation is Equation 13:

$$V_{CS} = \frac{N_s \cdot R_{CS}}{N_p} \left(I_o + \frac{(1-D) \cdot V_o \cdot T_{sw}}{2L_s} \right) \quad V \quad (\text{EQ. 13})$$

where V_{CS} is the voltage across the current sense resistor, L_s is the secondary winding inductance, and I_o is the output current at current limit. Equation 13 assumes the voltage drop across the output rectifier is negligible.

Since the peak current limit threshold is 1.00V, the total current feedback signal plus the external ramp voltage must sum to this value when the output load is at the current limit threshold as:

$$V_e + V_{CS} = 1V \quad (\text{EQ. 14})$$

shown in Equation 14.

Substituting Equations 12 and 13 into Equation 14 and solving for R_{CS} yields Equation 15:

$$R_{CS} = \frac{1}{\frac{D \cdot T_{sw} \cdot V_{IN}}{L_p} \cdot \left(\frac{1}{\pi} + 0.5 \right) \frac{1}{1-D} - 1 + \frac{N_s}{N_p} \cdot \left(I_o + \frac{(1-D) \cdot V_o \cdot T_{sw}}{2L_s} \right)} \quad (\text{EQ. 15})$$

Adding slope compensation is accomplished in the ISL7884xASRH using an external buffer transistor and the RTCT signal. A typical application sums the buffered RTCT signal with the current sense feedback and applies the result to the CS pin as shown in Figure 6.

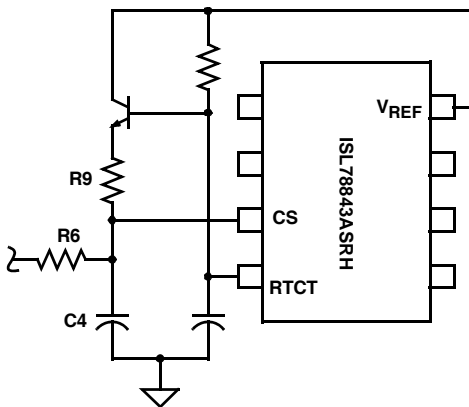


FIGURE 6. SLOPE COMPENSATION

Assuming the designer has selected values for the RC filter (R_6 and C_4) placed on the CS pin, the value of R_9 required to add the appropriate external ramp can be found by superposition.

$$V_e = \frac{2.05D \cdot R_6}{R_6 + R_9} \quad V \quad (\text{EQ. 16})$$

The factor of 2.05 in Equation 16 arises from the peak amplitude of the sawtooth waveform on RTCT minus a base-emitter junction drop. That voltage multiplied by the maximum duty cycle is the voltage source for the slope compensation. Rearranging to solve for R_9 yields Equation 17:

$$R_9 = \frac{(2.05D - V_e) \cdot R_6}{V_e} \quad \Omega \quad (\text{EQ. 17})$$

The value of R_{CS} determined in Equation 15 must be rescaled so that the current sense signal presented at the CS pin is that predicted by Equation 13. The divider created by R_6 and R_9 makes this necessary.

$$R'_{CS} = \frac{R_6 + R_9}{R_9} \cdot R_{CS} \quad (\text{EQ. 18})$$

Example:

$$V_{IN} = 12V$$

$$V_o = 48V$$

$$L_s = 800\mu H$$

$$N_s/N_p = 10$$

$$L_p = 8.0\mu H$$

$$I_o = 200mA$$

$$\text{Switching Frequency, } f_{sw} = 200kHz$$

$$\text{Duty Cycle, } D = 28.6\%$$

$$R_6 = 499\Omega$$

Solve for the current sense resistor, R_{CS} , using Equation 15.

$$R_{CS} = 295m\Omega$$

Determine the amount of voltage, V_e , that must be added to the current feedback signal using Equation 12.

$$V_e = 92.4mV$$

Using Equation 17, solve for the summing resistor, R_9 , from CT to CS.

$$R_9 = 2.67k\Omega$$

Determine the new value of R_{CS} (R'_{CS}) using Equation 18.

$$R'_{CS} = 350m\Omega$$

Additional slope compensation may be considered for design margin. The above discussion determines the minimum external ramp that is required. The buffer transistor used to create the external ramp from RTCT should have a sufficiently high gain (>200) so as to minimize the required base current. Whatever base current is required reduces the charging current into RTCT and will reduce the oscillator frequency.

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

Fault Conditions

A Fault condition occurs if V_{REF} falls below 4.65V. When a Fault is detected, OUT is disabled. When V_{REF} exceeds 4.80V, the Fault condition clears, and OUT is enabled.


Ground Plane Requirements

Careful layout is essential for satisfactory operation of the device. A good ground plane must be employed. A unique section of the ground plane must be designated for high di/dt currents associated with the output stage. V_{DD} should be bypassed directly to GND with good high frequency capacitors.

References

- [1] Ridley, R., "A New Continuous-Time Model for Current Mode Control", IEEE Transactions on Power Electronics, Vol. 6, No. 2, April 1991.

Die Map

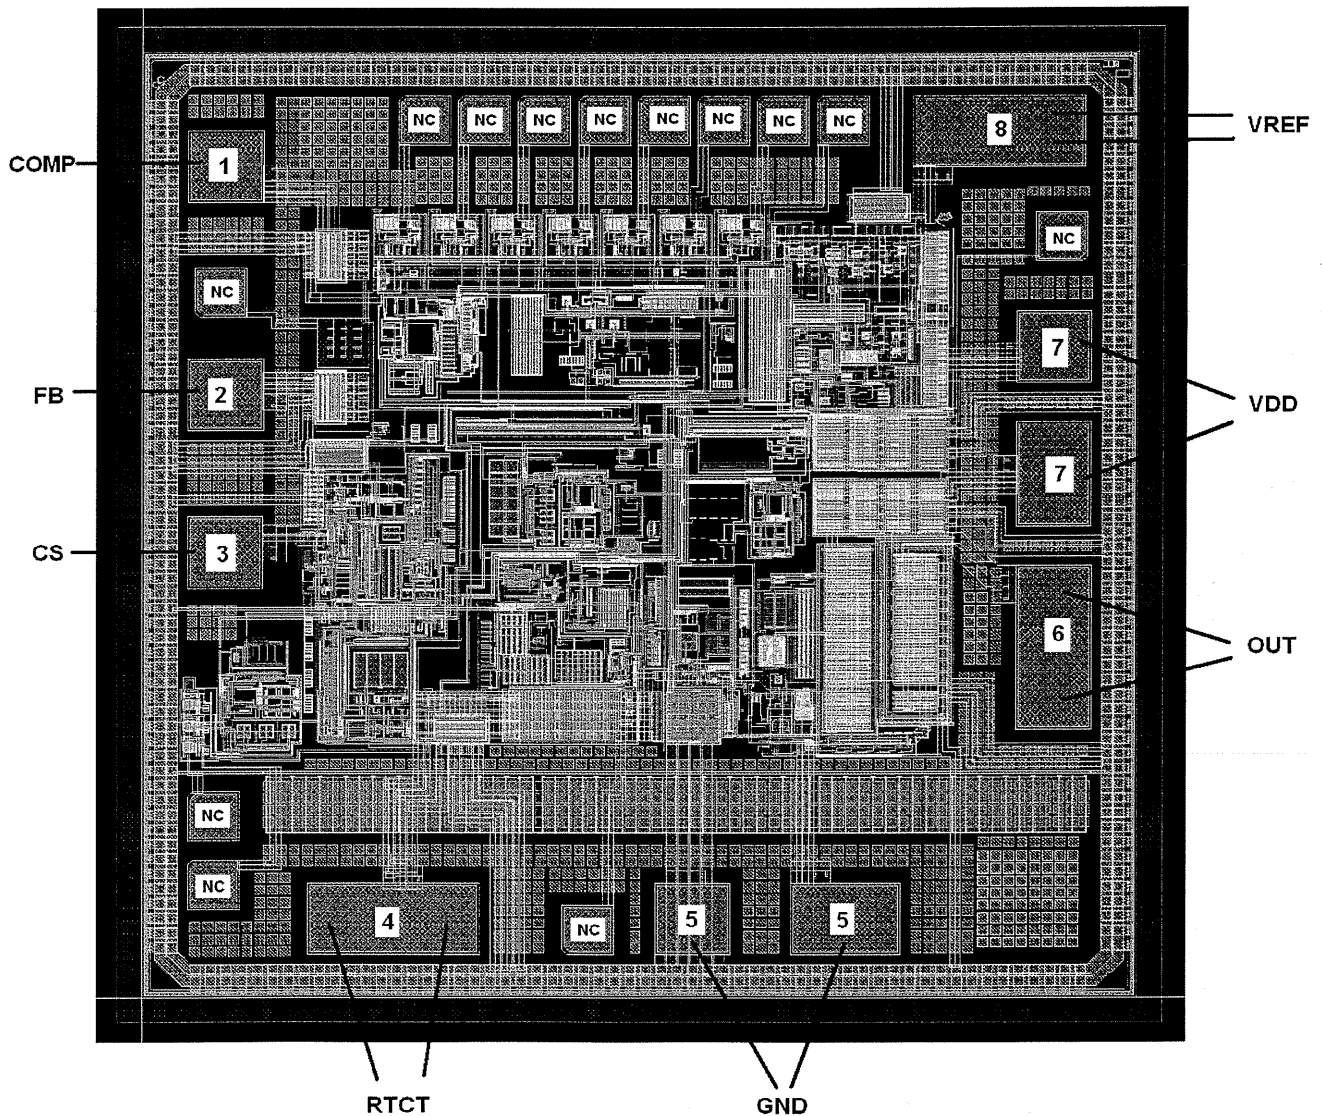

Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to web to make sure you have the latest Rev.

DATE	REVISION	CHANGE
February 28, 2012	FN6991.2	Pg 10 - Updated Equations 13 and 15 – Changed f_{SW} to T_{SW} . Changed Equation 14 – added "V" to 1 making it 1V. Paragraph under Equation 12, changed f_{SW} is the switching frequency to T_{SW} is the switching period.
November 9, 2011		Converted to new datasheet template. Added Abs Max, Thermal Information, and MIN/MAX data for Electrical Spec table. Added boldface over-temp limit notes. Pg 14: Replaced POD K8.A rev 1 with rev 2. Changes as follows: : In Side View, added 0.045 (1.14) dimension and removed "MIN" label from 0.026(0.66) dimension
April 22, 2010	FN6991.1	Added Electrical Spec Table showing only the typical values. Removed boldface over-temp limit notes.
April 8, 2010		Added SBDIP parts, pinout and Flatpack & SBDIP PODs.
December 21, 2009	FN6991.0	Initial pre-release

Products

Intersil Corporation is a leader in the design and manufacture of high-performance analog semiconductors. The Company's products address some of the industry's fastest growing markets, such as, flat panel displays, cell phones, handheld products, and notebooks. Intersil's product families address power management and analog signal processing functions. Go to www.intersil.com/products for a complete list of Intersil product families.

*For a complete listing of Applications, Related Documentation and Related Parts, please see the respective device information page on intersil.com: [ISL78840ASRH](http://www.intersil.com/products), [ISL78841ASRH](http://www.intersil.com/products), [ISL78843ASRH](http://www.intersil.com/products), [ISL78845ASRH](http://www.intersil.com/products)

To report errors or suggestions for this datasheet, please go to www.intersil.com/askourstaff




FITs are available from our website at <http://rel.intersil.com/reports/search.php>

Package Outline Drawing

K8.A

8 LEAD CERAMIC METAL SEAL FLATPACK PACKAGE

Rev 2, 12/10

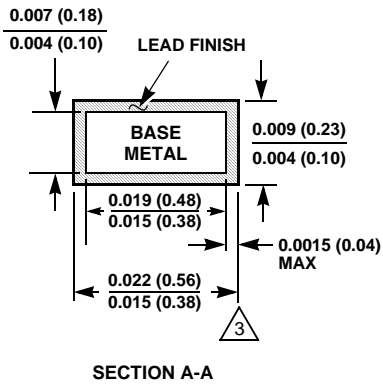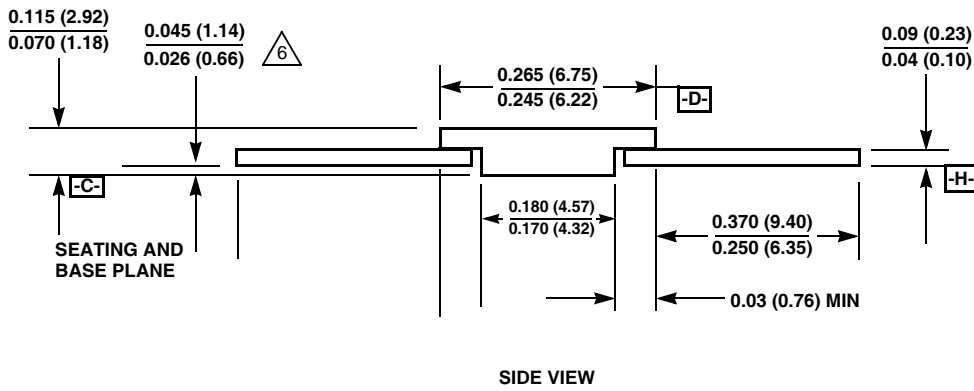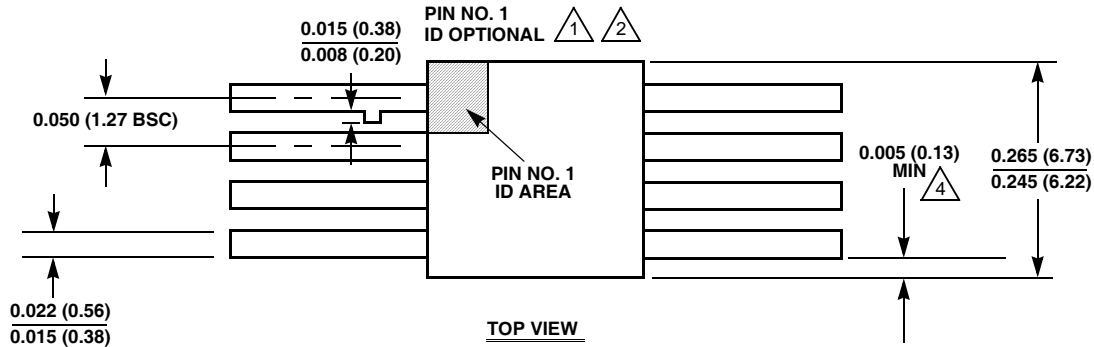


NOTES:

1. Index area: A notch or a pin one identification mark shall be located adjacent to pin one and shall be located within the shaded area shown. The manufacturer's identification shall not be used as a pin one identification mark. Alternately, a tab may be used to identify pin one.
2. If a pin one identification mark is used in addition to a tab, the limits of the tab dimension do not apply.
3. The maximum limits of lead dimensions (section A-A) shall be measured at the centroid of the finished lead surfaces, when solder dip or tin plate lead finish is applied.
4. Measure dimension at all four corners.
5. For bottom-brazed lead packages, no organic or polymeric materials shall be molded to the bottom of the package to cover the leads.
6. Dimension shall be measured at the point of exit (beyond the meniscus) of the lead from the body. Dimension minimum shall be reduced by 0.0015 inch (0.038mm) maximum when solder dip lead finish is applied.
7. Dimensioning and tolerancing per ANSI Y14.5M - 1982.
8. Controlling dimension: INCH.

ISL78840ASRH, ISL78841ASRH, ISL78843ASRH, ISL78845ASRH

Ceramic Dual-In-Line Metal Seal Packages (SBDIP)

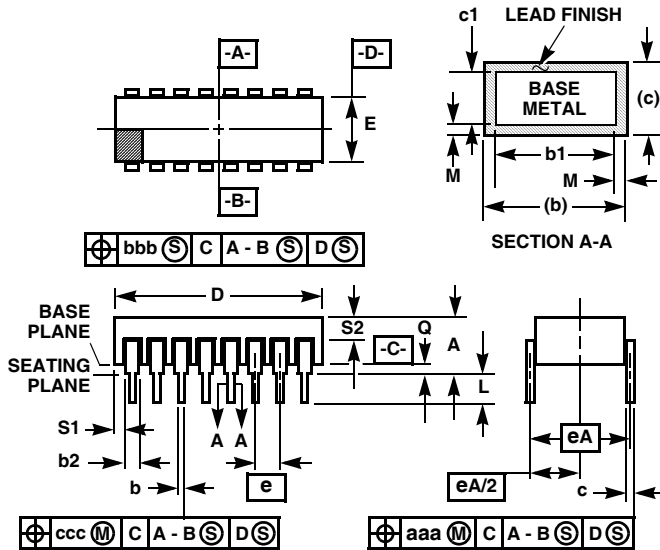

D8.3 MIL-STD-1835 CDIP2-T8 (D-4, CONFIGURATION C) 8 LEAD CERAMIC DUAL-IN-LINE METAL SEAL PACKAGE

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	-	0.200	-	5.08	-
b	0.014	0.026	0.36	0.66	2
b1	0.014	0.023	0.36	0.58	3
b2	0.045	0.065	1.14	1.65	-
b3	0.023	0.045	0.58	1.14	4
c	0.008	0.018	0.20	0.46	2
c1	0.008	0.015	0.20	0.38	3
D	-	0.405	-	10.29	-
E	0.220	0.310	5.59	7.87	-
e	0.100 BSC		2.54 BSC		-
eA	0.300 BSC		7.62 BSC		-
eA/2	0.150 BSC		3.81 BSC		-
L	0.125	0.200	3.18	5.08	-
Q	0.015	0.060	0.38	1.52	5
S1	0.005	-	0.13	-	6
S2	0.005	-	0.13	-	7
α	90°	105°	90°	105°	-
aaa	-	0.015	-	0.38	-
bbb	-	0.030	-	0.76	-
ccc	-	0.010	-	0.25	-
M	-	0.0015	-	0.038	2
N	8		8		8

NOTES:

1. Index area: A notch or a pin one identification mark shall be located adjacent to pin one and shall be located within the shaded area shown. The manufacturer's identification shall not be used as a pin one identification mark.
2. The maximum limits of lead dimensions b and c or M shall be measured at the centroid of the finished lead surfaces, when solder dip or tin plate lead finish is applied.
3. Dimensions b1 and c1 apply to lead base metal only. Dimension M applies to lead plating and finish thickness.
4. Corner leads (1, N, N/2, and N/2+1) may be configured with a partial lead paddle. For this configuration dimension b3 replaces dimension b2.
5. Dimension Q shall be measured from the seating plane to the base plane.
6. Measure dimension S1 at all four corners.
7. Measure dimension S2 from the top of the ceramic body to the nearest metallization or lead.
8. N is the maximum number of terminal positions.
9. Braze fillets shall be concave.
10. Dimensioning and tolerancing per ANSI Y14.5M - 1982.
11. Controlling dimension: INCH.

Rev. 0 4/94

For additional products, see www.intersil.com/product_tree

Intersil products are manufactured, assembled and tested utilizing ISO9000 quality systems as noted in the quality certifications found at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com