



limit, either sourcing or sinking, and that the amplifier is in thermal shutdown. Additionally, the Enable input can be used to turn off the amplifier, thus putting the output into a high-impedance, zero output current state. This same input can also be used to simultaneously apply a new set of voltage and current settings to the load. The LT1970 is available in a small 20-pin TSSOP package with exposed underside metal for heat dissipation.

### Boosted Output Current with “Snap-Back” Current Limiting

The LT1970 has separate supply pins for the input stage and the power output stage. Only load current flows through the output stage power supplies ( $V^+$  and  $V^-$ ). These pins can provide gate or base drive to external power transistors to boost the output current capability of the amplifier. A simple power stage, shown in Figure 3, increases the output current to  $\pm 5A$ . The same 0V to 5V inputs now set the output current limits a factor of ten higher (to 1A/V) by the use of a smaller current sense resistor,  $R_S = 0.1\Omega$ .

Externally connected gain setting resistors allow Kelvin sensing at the load. By connecting the feedback resistor right at the load, the voltage placed on the load is exactly what it should be. Any voltage drop across the current sense resistor is inside the feedback loop and thus does

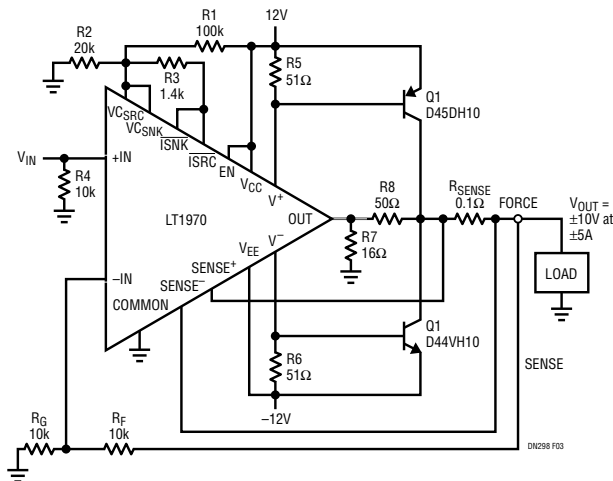


Figure 3. Easily Adjusted Current Limit for a  $\pm 5A$  Boosted Output Current Stage

not create a voltage error. Figure 3 also shows a unique way to use the open-collector error flags to provide extra protection to the load circuitry. When the amplifier enters current limit in either direction, the appropriate error flag goes low. This high impedance to 0V transition can provide a large amount of hysteresis to the current limit control inputs, forcing a drastic reduction in output current. Resistors R1, R2 and R3 set the current limit control feedback at 2V max and 200mV min. Should the load current ever exceed the predetermined maximum limit, the output current snaps back to the min level. The output current remains at this lower level until the signal drops to a point where the load current is less than the minimum set value. When the signal is low enough, the flag output goes open and the current limit reverts to the maximum value. This action simulates an automatically resettable fuse to protect a load. Figure 4 shows the action of this feedback with a maximum current limit of 2A snapping back to 200mA when exceeded in either direction.

### Conclusion

The LT1970 is a versatile and easy to use power op amp with a built-in precision adjustable current limit, which can protect load circuitry from damage caused by excessive power from the amplifier. This feature is particularly useful in ATE systems where the load is variable (and possibly faulty) at each tested node. Tight control of the output current in these systems is important to prevent damage to the tested unit.

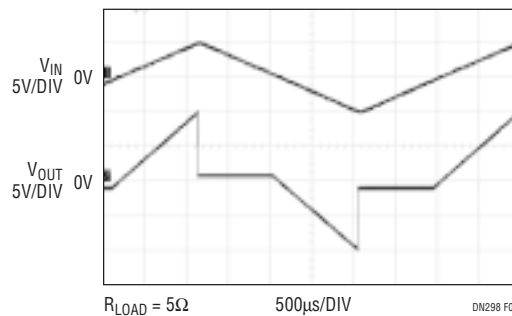


Figure 4. “Snap Back” Current Limiting with Both Source and Sink Current Limit Controlled by a Simple Resistor Network

#### Data Sheet Download

<http://www.linear.com/go/dnLT1970>

For literature on our Op Amps, call **1-800-4-LINEAR**. For applications help, call (408) 432-1900, Ext. 2759