

Flatpack Two-Way Power Divider, 5 - 1000 MHz

DS-327

Features

- Broadband, IN Phase Divider
- Low Loss: 0.3 dB Typical
- Amplitude Balance: 0.05 dB Typical
- Impedance: 50 Ohms Nominal
- Maximum Power Rating or Input Power: 1 Watt Max.
- Internal Load Dissipation: 0.05 Watts Max.
- MIL-STD-883 Screening Available


Description

A Power Divider is ideally a loss less reciprocal device which can also perform vector summation of two or more signals and thus is sometimes called a power combiner or summer.

Pin Configuration

Pin No.	Function	Pin No.	Function
1	Σ	5	GND
2	GND	6	GND
3	GND	7	GND
4	Output C	8	Output D

FP-2

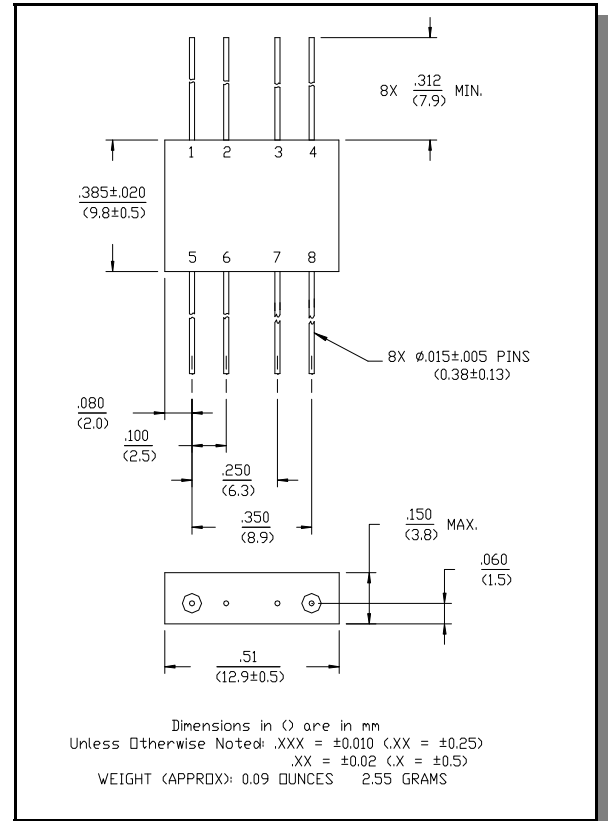


Electrical Specifications¹: T_A = -55°C to +85°C

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	Less Coupling	5 - 500 MHz	dB	—	—	0.5
		500 - 1000 MHz	dB	—	—	1.0
Isolation	—	5 - 500 MHz	dB	25	—	—
		500 - 1000 MHz	dB	20	—	—
Amplitude Balance	—	5 - 1000 MHz	dB	—	—	0.2
Phase Balance	—	5 - 500 MHz	°	—	—	2
		500 - 1000 MHz	°	—	—	3
VSWR	Input Output	10 - 500 MHz	Ratio	—	—	1.3:1
		5 - 1000 MHz	Ratio	—	—	1.5:1


1. All specifications apply with 50 ohm source and load impedance.

Typical Performance Curves


Insertion Loss

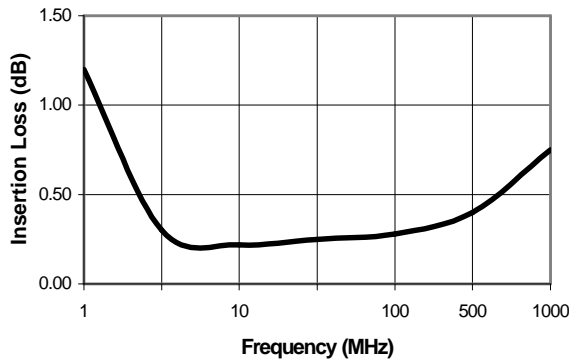

Isolation

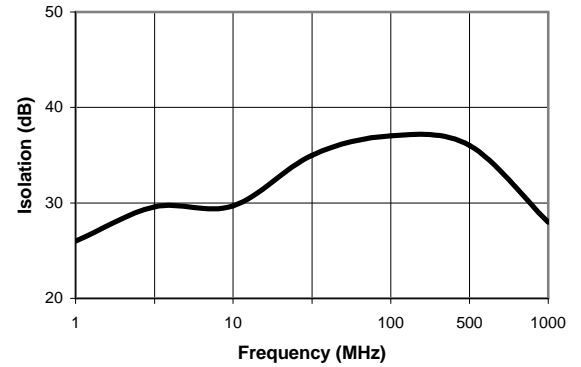

VSWR

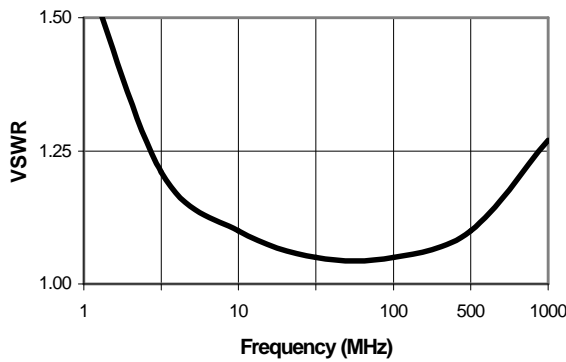

Ordering Information

Part Number	Package
DS-327 PIN	FP-2

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

Visit www.macom.com for additional data sheets and product information.

- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020