


Model: CDP-CX250**No.** 499**Subject:** Display is too dark or does not light**Date:** November 8, 1996**Symptom:**

() The customer states the display is too dark to read or it does not light at all.

Solution: Replace or remove parts as listed below (see diagram for parts location).

REF#	DESCRIPTION	PART NO	ACTION
Q301	2SB734	8-729-140-97	REPLACE
D315	RD30ESB2	8-719-110-72	REPLACE
Q302	2SA1175	8-729-119-76	REMOVE

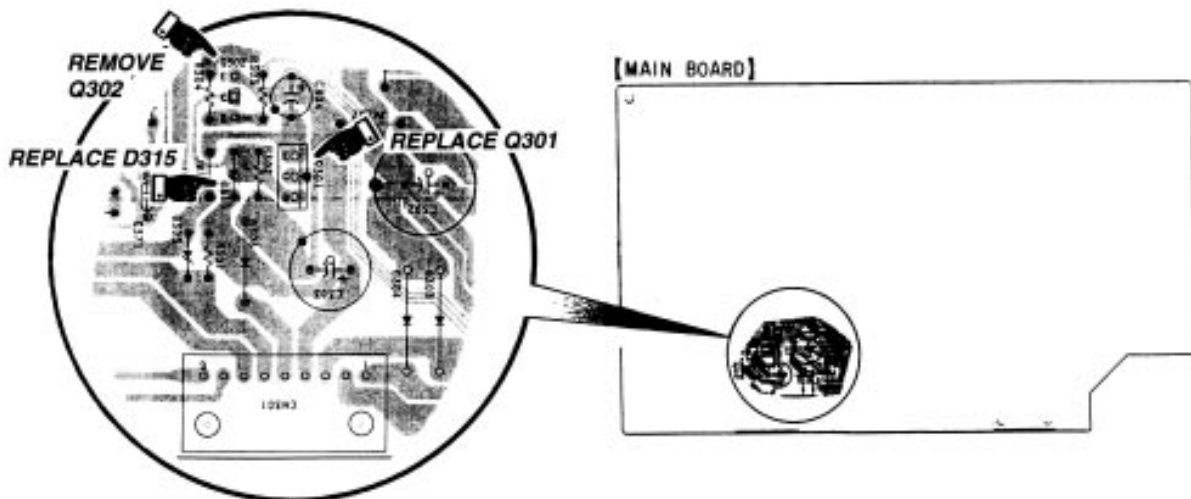

Applicable Serial Number Range:

#8800001 - 8810525

