

FEATURES

- 12-bit temperature-to-digital converter**
- B-Grade accuracy ±1.0°C from 0°C to 70°C**
- A-Grade accuracy ±2.0°C from -25°C to 100°C**
- SMBus-/I2C- compatible interface**
- Operation from -55°C to +125°C**
- Operation from 3 V to 5.5 V**
- Overtemperature indicator**
- Shutdown mode for low power consumption**
- Power consumption 69 μW typically at 3.3 V**
- Small, low cost 8-pin MSOP in Pb-Sn and Pb-free packages**
- Standard 8-pin SOIC Pb-free package**

APPLICATIONS

- Isolated sensors**
- Environmental control systems**
- Computer thermal monitoring**
- Thermal protection**
- Industrial process control**
- Power-system monitors**
- Hand Held Applications**

GENERAL DESCRIPTION

The ADT75 is a complete temperature monitoring system in 8-lead MSOP and SOIC packages. It contains a band gap temperature sensor and 12-bit ADC to monitor and digitize the temperature to a resolution of 0.0625°C. The ADT75 is pin and register compatible with the LM75 and AD7416.

The ADT75 is specified for operation at supply voltages from 3 V to 5.5 V. Operating at 3.3 V, the supply current is typically 300 μA. The ADT75 offers a shutdown mode that powers down the device and gives a shutdown current of typically 3 μA. The ADT75 is rated for operation over the -55°C to +125°C temperature range.

Three pins (A0, A1 and A2) are available for address selection. There is also an open-drain OS/ALERT output that becomes active when temperature exceeds a programmable limit. This pin can operate in either comparator or interrupt mode.

Rev. PrA

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

FUNCTIONAL BLOCK DIAGRAM

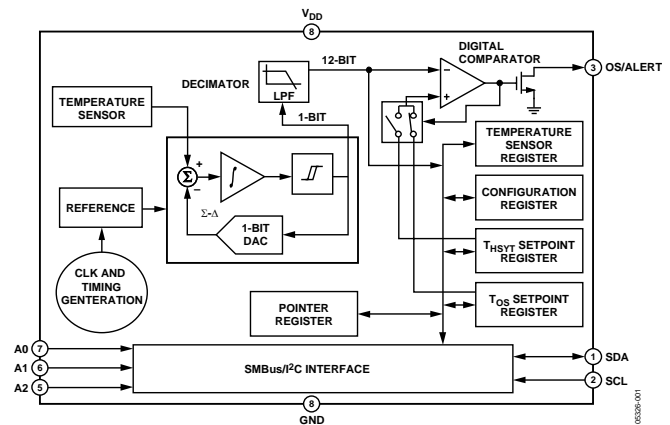


Figure 1.

PRODUCT HIGHLIGHTS

1. The ADT75 has an on-chip temperature sensor that allows an accurate measurement of the ambient temperature. The measurable temperature range is -55°C to +125°C.
2. Supply voltage is 3.0 V to 5.5 V.
3. Space-saving 8-lead MSOP and 8-lead SOIC.
4. Temperature accuracy is ±1°C maximum.
5. 0.0625°C temperature resolution.
6. The ADT75 features a shutdown mode that reduces the current consumption to 3 μA typ.
7. As many as 8 ADT75's can be connected to a single SMBus/I²C bus.

TABLE OF CONTENTS

Specifications—A Grade.....	3	ADT75 Registers	12
Specifications—B Grade	4	ADT75 Serial Interface.....	15
Timing Characteristics	5	Writing to the ADT75.....	16
Absolute Maximum Ratings.....	6	Reading Data From the ADT75	17
ESD Caution.....	6	OS/Alert Output OverTemperature Modes.....	18
Pin Configurations and Function Descriptions	7	SMBus Alert	19
Typical Performance Characteristics	8	Application Information.....	20
Theory of Operation	9	Thermal Response Time	20
Circuit Information.....	9	Self-Heating Effects.....	20
Converter Details.....	9	Supply Decoupling	20
Functional Description.....	9	Temperature Monitoring.....	20
Temperature Data Format	10	Outline Dimensions	22
One-Shot Mode	11	Ordering Guide	22
Fault Queue	11		

REVISION HISTORY

3/05—Revision PrA: Initial Preliminary Version

SPECIFICATIONS—A GRADE

All specifications -55°C to $+125^{\circ}\text{C}$; $T_A = T_{\text{MIN}}$ to T_{MAX} , $V_{\text{DD}} = 3.0\text{ V}$ to 5.5 V , unless otherwise noted.

Table 1.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
TEMPERATURE SENSOR AND ADC Accuracy at $V_{\text{DD}} = 3.0\text{ V}$ to 5.5 V			± 2	$^{\circ}\text{C}$	$T_A = -25^{\circ}\text{C}$ to $+100^{\circ}\text{C}$
			± 3	$^{\circ}\text{C}$	$T_A = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
ADC Resolution		12		Bits	
Temperature Resolution		0.0625		$^{\circ}\text{C}$	
Temperature Conversion Time		60		ms	
Update Rate		100		ms	Conversion started every 100 ms
Long Term Drift		0.08		$^{\circ}\text{C}$	Drift over 10 years, if part is operated at 55°C
OS/ALERT OUTPUT (OPEN DRAIN)			0.4	V	$I_{\text{OL}} = 3\text{ mA}$
Output Low Voltage, V_{OL}		10		pF	
Pin Capacitance		0.1	5	μA	OS/Alert pin pulled up to 5.5 V
High Output Leakage Current, I_{OH}		15		Ω	Supply and temperature dependent
RON Resistance (Low Output)					
DIGITAL INPUTS			± 1	μA	$V_{\text{IN}} = 0\text{ V}$ to V_{DD}
Input Current			$0.3 \times V_{\text{DD}}$	V	
Input Low Voltage, V_{IL}				V	
Input High Voltage, V_{IH}	$0.7 \times V_{\text{DD}}$			ns	Input filtering suppresses noise spikes of less than 50 ns
SCL, SDA Glitch Rejection			50		
Pin Capacitance	3		10	pF	
DIGITAL OUTPUT (OPEN DRAIN)			1	mA	$V_{\text{OH}} = 5\text{ V}$
Output High Current, I_{OH}			0.4	V	$I_{\text{OL}} = 3\text{ mA}$
Output Low Voltage, V_{OL}				V	
Output High Voltage, V_{OH}	$0.7 \times V_{\text{DD}}$			pF	
Output Capacitance, C_{OUT}	3		10		
POWER REQUIREMENTS			5.5	V	
Supply Voltage	3		TBD	μA	Peak current while converting and I ² C interface inactive.
Supply Current at 3.3 V		300		μA	Peak current while converting and I ² C interface inactive.
Supply Current at 5.0 V		380		μA	Part converting and I ² C interface inactive.
Average Current at 3.3 V		194		μA	Part converting and I ² C interface inactive.
Average Current at 5.0 V		244		μW	$V_{\text{DD}} = 3.3\text{ V}$, normal mode at 25°C
Shutdown Mode at 3.3 V		3	6	μW	Average power dissipated for $V_{\text{DD}} = 3.3\text{ V}$, shutdown mode at 25°C
Shutdown Mode at 5.0 V		5.5	10	μW	Average power dissipated for $V_{\text{DD}} = 5.0\text{ V}$, shutdown mode at 25°C
Average Power Dissipation		640		μW	
1 SPS		68.7		μW	
		139.85		μW	

SPECIFICATIONS—B GRADE

All specifications -55°C to $+125^{\circ}\text{C}$; $T_A = T_{\text{MIN}}$ to T_{MAX} , $V_{\text{DD}} = 3.0\text{ V}$ to 5.5 V , unless otherwise noted.

Table 2.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
TEMPERATURE SENSOR AND ADC					
Accuracy at $V_{\text{DD}} = 3.0\text{ V}$ to 5.5 V			± 1	$^{\circ}\text{C}$	$T_A = 0^{\circ}\text{C}$ to $+70^{\circ}\text{C}$
			± 2	$^{\circ}\text{C}$	$T_A = -25^{\circ}\text{C}$ to $+100^{\circ}\text{C}$
			± 3	$^{\circ}\text{C}$	$T_A = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
ADC Resolution		12		Bits	
Temperature Resolution		0.0625		$^{\circ}\text{C}$	
Temperature Conversion Time		60		ms	
Update Rate		100		ms	Conversion started every 100 ms
Long Term Drift		0.08		$^{\circ}\text{C}$	Drift over 10 years, if part is operated at 55°C
OS/ALERT OUTPUT (OPEN DRAIN)					
Output Low Voltage, V_{OL}			0.4	V	$I_{\text{OL}} = 3\text{ mA}$
Pin Capacitance		10		pF	
High Output Leakage Current, I_{OH}		0.1	5	μA	OS/ALERT pin pulled up to 5.5 V
R_{ON} Resistance (Low Output)		15		Ω	Supply and temperature dependent
DIGITAL INPUTS					
Input Current			± 1	μA	$V_{\text{IN}} = 0\text{ V}$ to V_{DD}
Input Low Voltage, V_{IL}			$0.3 \times V_{\text{DD}}$	V	
Input High Voltage, V_{IH}	$0.7 \times V_{\text{DD}}$			V	
SCL, SDA Glitch Rejection			50	ns	Input filtering suppresses noise spikes of less than 50 ns
Pin Capacitance	3		10	pF	
DIGITAL OUTPUT (OPEN DRAIN)					
Output High Current, I_{OH}			1	mA	$V_{\text{OH}} = 5\text{ V}$
Output Low Voltage, V_{OL}			0.4	V	$I_{\text{OL}} = 3\text{ mA}$
Output High Voltage, V_{OH}	$0.7 \times V_{\text{DD}}$			V	
Output Capacitance, C_{OUT}	3		10	pF	
POWER REQUIREMENTS					
Supply Voltage	3		5.5	V	
Supply Current at 3.3 V		300	TBD	μA	Peak current while converting and I ² C interface inactive.
Supply Current at 5.0 V		380	TBD	μA	Peak current while converting and I ² C interface inactive.
Average Current at 3.3 V		194		μA	Part converting and I ² C interface inactive.
Average Current at 5.0 V		244		μA	Part converting and I ² C interface inactive.
Shutdown Mode at 3.3 V		3	6	μA	
Shutdown Mode at 5.0 V		5.5	10	μA	
Average Power Dissipation		640		μW	$V_{\text{DD}} = 3.3\text{ V}$, normal mode at 25°C
1 SPS		68.7		μW	Average power dissipated for $V_{\text{DD}} = 3.3\text{ V}$, shutdown mode at 25°C
		139.85		μW	Average power dissipated for $V_{\text{DD}} = 5.0\text{ V}$, shutdown mode at 25°C

TIMING CHARACTERISTICS

Guaranteed by design and characterization, not production tested. The SDA & SCL timing is measured with the input filters turned on so as to meet the Fast-Mode I²C specification. Switching off the input filters improves the transfer rate but has a negative affect on the EMC behavior of the part.

T_A = T_{MIN} to T_{MAX}, V_{DD} = +2.7 V to +5.5 V, unless otherwise noted.

Table 3.

Parameter	MIN	TYP	MAX	Units	Comments
Serial Clock Period, t ₁	2.5			μs	Fast-mode I ² C. See Figure 2.
Data In Setup Time to SCL High, t ₂	50			ns	See Figure 2.
Data Out Stable after SCL Low, t ₃	0		0.9 ¹	ns	Fast mode I ² C. See Figure 2.
Data Out Stable after SCL Low, t ₃	0		3.45 ¹	μs	Standard mode I ² C. See Figure 2.
SDA Low Setup Time to SCL Low (Start Condition), t ₄	50			ns	See Figure 2.
SDA High Hold Time after SCL High (Stop Condition), t ₅	50			ns	See Figure 2.
SDA and SCL Rise Time, t ₆			300	ns	Fast mode I ² C. See Figure 2.
SDA and SCL Rise Time, t ₆			1000	ns	Standard mode I ² C. See Figure 2.
SDA and SCL Fall Time, t ₇			300	ns	See Figure 2.
Capacitive Load for each Bus Line, C _B			400	pF	

¹ This time has only to be met if the master does not stretch the low period of the SCL signal.

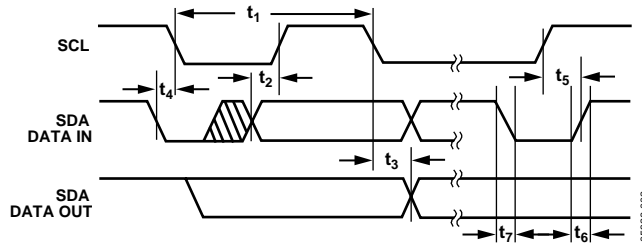


Figure 2. SMBus/I²C Timing Diagram

ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter	Rating
V _{DD} to GND	-0.3 V to +7 V
SDA Input Voltage to GND	-0.3 V to V _{DD} + 0.3 V
SDA Output Voltage to GND	-0.3 V to V _{DD} + 0.3 V
SCL Input Voltage to GND	-0.3 V to V _{DD} + 0.3 V
OS/ALERT Output Voltage to GND	-0.3 V to V _{DD} + 0.3 V
Operating Temperature Range	-55°C to +150°C
Storage Temperature Range	-65°C to +160°C
Maximum Junction Temperature, T _{JMAX}	150.7°C
8-Lead MSOP (RM-8)	
Power Dissipation ²	$W_{MAX} = (T_{JMAX} - T_A^3)/\theta_{JA}$
Thermal Impedance ⁴	
θ _{JA} , Junction-to-Ambient (still air)	205.9°C/W
θ _{JC} , Junction-to-Case	43.74°C/W
8-Lead SOIC (R-8)	
Power Dissipation ⁵	$W_{MAX} = (T_{JMAX} - T_A^2)/\theta_{JA}$
Thermal Impedance ³	
θ _{JA} , Junction-to-Ambient (still air)	121.3°C/W
θ _{JC} , Junction-to-Case	42.9°C/W
IR Reflow Soldering	
Peak Temperature	220°C (0°C/5°C)
Time at Peak Temperature	10 sec to 20 sec
Ramp-Up Rate	3°C/s maximum
Ramp-Down Rate	-6°C/sec maximum
Time 25°C to Peak Temperature	6 min maximum
IR Reflow Soldering – Pb-Free Package	
Peak Temperature	260°C (+0°C)
Time at Peak Temperature	20 sec to 40 sec
Ramp-Up Rate	3°C/sec maximum
Ramp-Down Rate	-6°C/sec maximum
Time 25°C to Peak Temperature	8 min maximum

² Values relate to package being used on a standard 2-layer PCB. This gives a worse case θ_{JA} and θ_{JC}. Reference Figure 3 for a plot of maximum power dissipation versus ambient temperature (T_A).

³ T_A = ambient temperature.

⁴ Junction-to-case resistance is applicable to components featuring a preferential flow direction, for example, components mounted on a heat sink. Junction-to-ambient resistance is more useful for air-cooled, PCB-mounted components.

⁵ Values relate to package being used on a 4-layer PCB.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

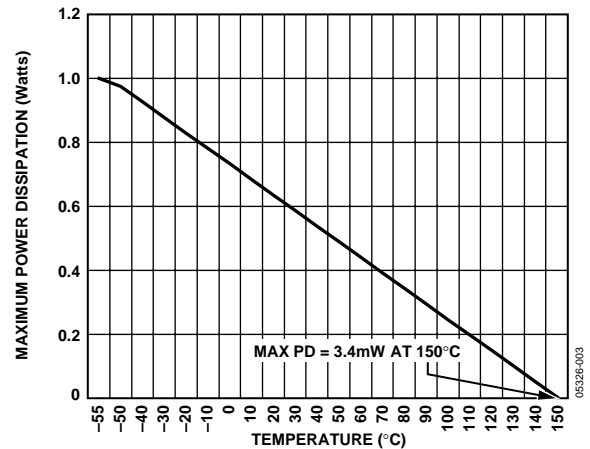


Figure 3. MSOP Maximum Power Dissipation vs. Temperature



PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS

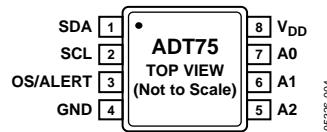


Figure 4. LFCSP Pin Configuration

Table 5. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	SDA	SMBus/I ² C Serial Data Input/Output. Serial data to be loaded into the part's registers and read from these registers is provided on this pin. Open-drain configuration – needs a pull-up resistor.
2	SCL	Serial Clock Input. This is the clock input for the serial port. The serial clock is used to clock in and clock out data to and from any register of the ADT75. Open-drain configuration – needs a pull-up resistor.
3	OS/ALERT	Over and Under Temperature Indicator. Default power as an OS pin. Open-drain configuration – needs a pull-up resistor.
4	GND	Analog and Digital Ground.
5	A2	SMBus/I ² C Serial Bus Address Selection Pin. Logic input. Can be set to GND or V _{DD} .
6	A1	SMBus/I ² C Serial Bus Address Selection Pin. Logic input. Can be set to GND or V _{DD} .
7	A0	SMBus/I ² C Serial Bus Address Selection Pin. Logic input. Can be set to GND or V _{DD} .
8	V _{DD}	Positive Supply Voltage, 3 V to 5.5 V. The supply should be decoupled to ground.

TYPICAL PERFORMANCE CHARACTERISTICS

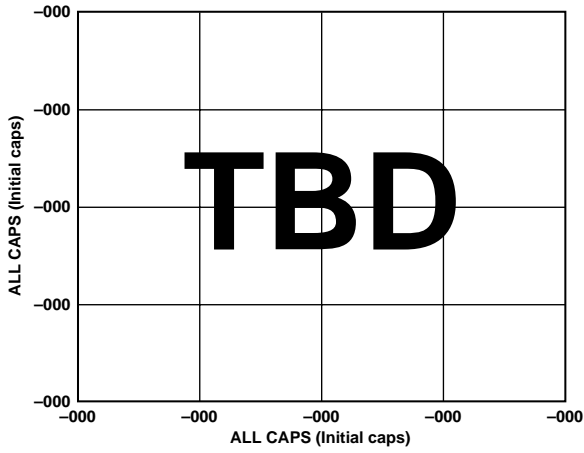


Figure 5. Temperature Accuracy at 3.3 V and 5 V

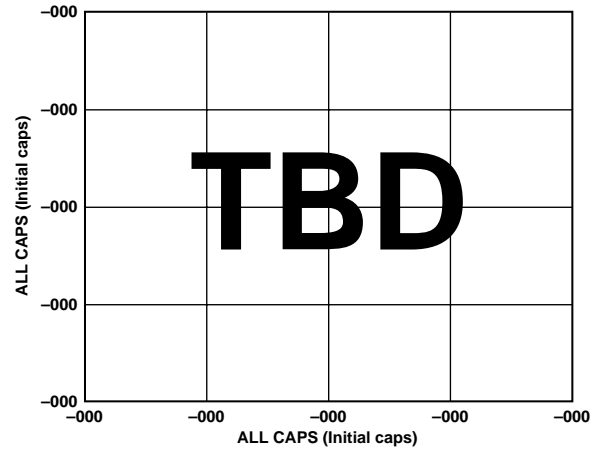


Figure 8. Shutdown Current vs. Supply Voltage at 30°

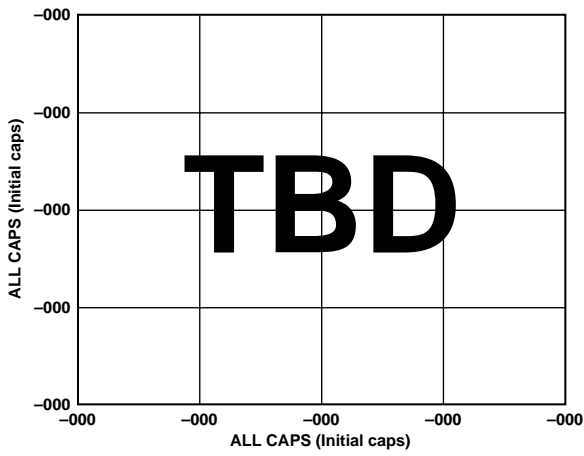


Figure 6. Average Operating Supply Current vs. Temperature

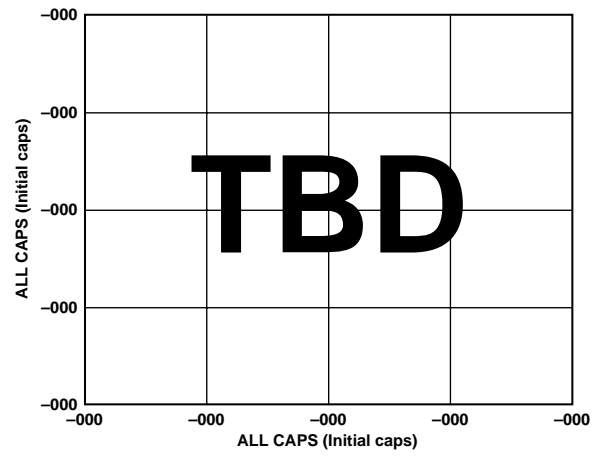


Figure 9. Temperature Accuracy vs. Supply Ripple Frequency

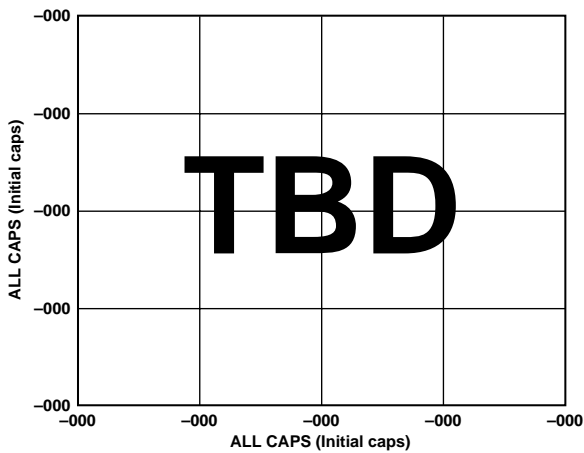


Figure 7. Average Operating Supply Current vs. Supply Voltage at 30°C

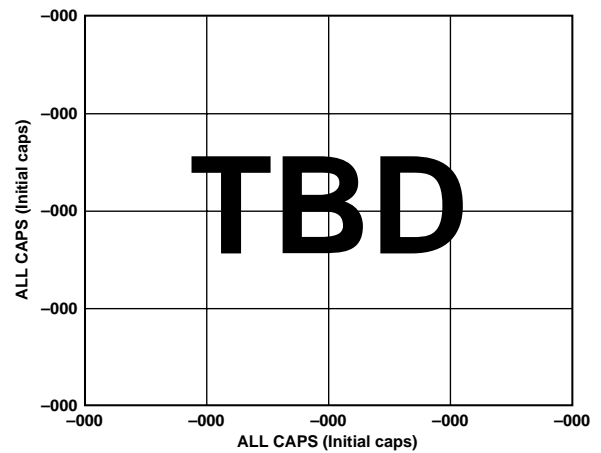


Figure 10. Response to Thermal Shock

THEORY OF OPERATION

CIRCUIT INFORMATION

The ADT75 is a 12-bit digital temperature sensor with the 12th bit acting as the sign bit. An on-board sensor generates a voltage precisely proportional to absolute temperature, which is compared to an internal voltage reference and is input to a precision digital modulator. Overall accuracy for the ADT75A grade is $\pm 2^{\circ}\text{C}$ from -25°C to $+100^{\circ}\text{C}$ and accuracy for the ADT75B grade is $\pm 1^{\circ}\text{C}$ from 0°C to $+70^{\circ}\text{C}$. Both grades have excellent transducer linearity. The serial interface is SMBus/I²C-compatible and the open-drain output of the ADT75 is capable of sinking 3 mA.

The on-board temperature sensor has excellent accuracy and linearity over the entire rated temperature range without needing correction or calibration by the user.

The sensor output is digitized by a first-order Σ - Δ modulator, also known as the charge balance type analog-to-digital converter. This type of converter utilizes time-domain oversampling and a high accuracy comparator to deliver 12 bits of effective accuracy in an extremely compact circuit.

CONVERTER DETAILS

The Σ - Δ modulator consists of an input sampler, a summing network, an integrator, a comparator, and a 1-bit DAC. Similar to the voltage-to-frequency converter, this architecture creates, in effect, a negative feedback loop. This architecture minimizes the integrator output by changing the duty cycle of the comparator output in response to input voltage changes. The comparator samples the output of the integrator at a much higher rate than the input sampling frequency, called oversampling. Oversampling spreads the quantization noise over a much wider band than that of the input signal, improving overall noise performance and increasing accuracy.

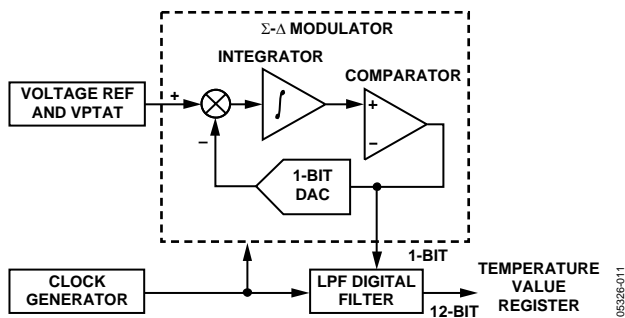


Figure 11. First-Order Σ - Δ Modulator

The modulated output of the comparator is encoded using a circuit technique that results in SMBus/I²C temperature data.

FUNCTIONAL DESCRIPTION

The conversion clock for the part is internally generated. No external clock is required except when reading from and writing to the serial port. In normal mode, the internal clock oscillator runs an automatic conversion sequence. During this automatic conversion sequence, a conversion is initiated every 100 ms. At this time, the part powers up its analog circuitry and performs a temperature conversion.

This temperature conversion typically takes 60 ms, after which time the analog circuitry of the part automatically shuts down. The analog circuitry powers up again 40 ms later, when the 100 ms timer times out and the next conversion begins. The result of the most recent temperature conversion is always available in the temperature value register because the SMBus/I²C circuitry never shuts down.

The ADT75 can be placed in a shutdown mode via the configuration register, in which case the on-chip oscillator is shut down and no further conversions are initiated until the ADT75 is taken out of shutdown mode. The ADT75 can be taken out of shutdown mode by writing zero to Bit D0 in the configuration register. The ADT75 typically takes 1.7 ms to come out of shutdown mode. The conversion result from the last conversion prior to shutdown can still be read from the ADT75 even when it is in shutdown mode.

In normal conversion mode, the internal clock oscillator is reset after every read or write operation. This causes the device to start a temperature conversion, the result of which is typically available 60 ms later. Similarly, when the part is taken out of shutdown mode, the internal clock oscillator is started and a conversion is initiated.

The conversion result is typically available 60 ms later. Reading from the device before a conversion is complete causes the ADT75 to stop converting; the part starts again when serial communication is finished. This read operation provides the previous result.

The measured temperature value is compared with a high temperature limit, stored in the 16-bit T_{OS} read/write register and the hysteresis temperature limit, stored in the 16-bit T_{HYST} read/write register. If the measured value exceeds these limits then the OS/ALERT pin is activated. This OS/ALERT pin is programmable for mode and polarity via the configuration register.

Configuration register functions consist of

- Switching between normal operation and full power-down.
- Switching between comparator and interrupt event modes.
- Setting the OS/ALERT pin active polarity.
- Setting up the number of faults that will activate the OS/ALERT pin.
- Enabling the one-shot mode.
- Enabling the SMBus alert function mode on the OS/ALERT pin.

TEMPERATURE DATA FORMAT

One LSB of the ADC corresponds to 0.0625°C. The ADC can theoretically measure a temperature range of 255°C (–128°C to +127°C), but the ADT75 is guaranteed to measure a low value temperature limit of –55°C to a high value temperature limit of +125°C. The temperature measurement result is stored in the 16-bit temperature value register and is compared with the high temperature limit stored in the T_{OS} setpoint register and the hysteresis limit in the T_{HYST} setpoint register.

Temperature data in the temperature value register, the T_{OS} setpoint register and the T_{HYST} setpoint register is represented by a 12-bit two's complement word. The MSB is the temperature sign bit. The four LSBs, Bit DB0 to Bit DB3, are not part of the temperature conversion result and are always 0's. The temperature data format is shown in Table 6 without Bit DB0 to Bit DB3.

Reading back the temperature from the temperature value register requires a two byte read unless only a 1°C (8-bits) resolution is required, then a one byte read is required.

Designers used to using a 9-bit temperature data format can still use the ADT75 by ignoring the last three LSBs of the 12-bit temperature value. These three LSBs are Bit D4 to Bit D6 in Table 6.

Table 6. 12-Bit Temperature Data Format

Temperature	Digital Output (Binary)	
	DB15 to DB4	Digital Output (Hex)
–55°C	1100 1001 0000	0xC90
–50°C	1100 1110 0000	0xCE0
–25°C	1110 0111 0000	0xE70
–0.0625°C	1111 1111 1111	0xFFF
0°C	0000 0000 0000	0x000
+0.0625°C	0000 0000 0001	0x001
+10°C	0000 1010 0000	0x0A0
+25°C	0001 1001 0000	0x190
+50°C	0011 0010 0000	0x320
+75°C	0100 1011 0000	0x4B0
+100°C	0110 0100 0000	0x640
+125°C	0111 1101 0000	0x7D0

Temperature Conversion Formulas

12-Bit Temperature Data Format

1. Positive Temperature = ADC Code(d)/16
2. Negative Temperature = (ADC Code(d)¹– 4096)/16
Negative Temperature = (ADC Code(d)² – 2048)/16

9-Bit Temperature Data Format

1. Positive Temperature = ADC Code(d)/2
2. Negative Temperature = (ADC Code(d)³ – 512)/2
Negative Temperature = (ADC Code(d)⁴ – 256)/2

8-Bit Temperature Data Format

1. Positive Temperature = ADC Code(d)
2. Negative Temperature = ADC Code(d)⁵ – 256
Negative Temperature = ADC Code(d)⁶ – 128
Bit DB7 (sign bit) is removed from the ADC code.

¹ For ADC Code, use all 12 bits of the data byte, including the sign bit.

² For ADC Code, Bit DB11 (sign bit) is removed from the ADC code.

³ For ADC Code, use all 9 bits of the data byte including the sign bit.

⁴ Bit DB8 (sign bit) is removed from the ADC code.

⁵ For the ADC Code, use all 8 bits of the data byte, including the sign bit.

⁶ Bit DB7 (sign bit) is removed from the ADC code.

ONE-SHOT MODE

Setting Bit D5 of the configuration register enables the one-shot mode. When this mode is enabled, the ADT75 goes immediately into shutdown mode and the current consumption is reduced to typically 3 μ A when VDD is 3.3 V and 5.5 μ A when VDD is 5 V. A one-shot temperature measurement is initiated when 0x04 is written to the address pointer register, which is writing to the One-Shot register. The ADT75 will power up, do a temperature conversion and power down again.

Wait for a minimum of 60 ms after writing to the One-Shot register before reading back the temperature. This time ensures the ADT75 has time to power up and do a conversion. Reading back from the One-Shot register, address 0x04, will give the resultant temperature conversion. Reading from the Temperature Value register will also give the same temperature value.

When either one of the overtemperature detection modes is selected, a write to the One-Shot register, address 0x04, will cause the OS/Alert pin to go active if the temperature exceeds the over-temperature limits. Refer to Figure 12 for more information on One-Shot OS/Alert pin operation.

Note: In the interrupt mode, a read from any register will reset the OS/Alert pin after it is activated by a write to the One-Shot register. In the comparator mode, once the temperature drops below the value in the THYST register a write to the One-Shot register will reset the OS/Alert pin.

The one-shot mode is useful when one of the circuit design priorities is to reduce power consumption.

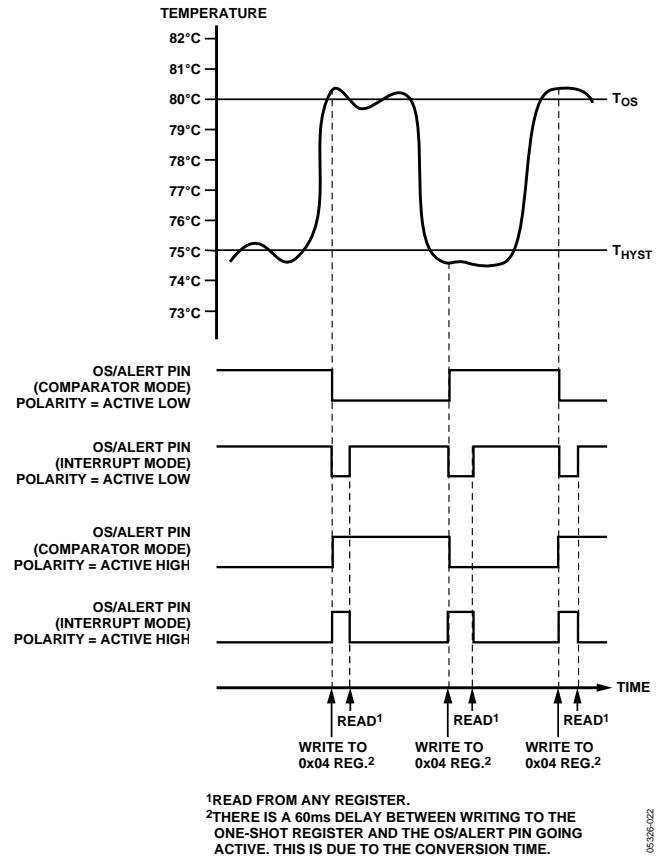


Figure 12. One-Shot OS/Alert Pin Operation

FAULT QUEUE

Bit D3 and Bit D4 of the configuration register can be used to set up a fault queue. Up to 6 faults can be provided to prevent false tripping of the OS/ALERT pin when the ADT75 is used in a noisy temperature environment. The number of faults set in the queue must occur consecutively to set the OS/ALERT output.

ADT75 REGISTERS

The ADT75 contains five registers, four are data registers and one is the address pointer register. The configuration register is the only data register that is 8 bits while the rest are 16 bits wide. The temperature value register is the only data register that is read-only. On power-up, the address pointer register is loaded with 0x00 and points to the temperature value register.

Table 7. ADT75 Registers

Pointer Address	Name	Power-On Default
0x00	Temperature value	0x00
0x01	Configuration	0x00
0x02	THYST Setpoint	0x4B00 (75°C)
0x03	TOS Setpoint	0x5000 (80°C)
0x04	One-Shot	0xXX

Address Pointer Register

This 8-bit write only register stores an address that points to one of the four data register and selects the one-shot mode. P0 and P1 select the data register to which subsequent data bytes are written to or read from. P0, P1 and P2 are used to select the one-shot mode by writing 04h to this register. A zero should be written to the rest of the bits.

Table 8. Address Pointer Register

	P7	P6	P5	P4	P3	P2	P1	P0
Default settings at power-up	0	0	0	0	0	0	0	0

Table 9. Register Addresses

P2	P1	P0	Register Selected
0	0	0	Temperature value
0	0	1	Configuration
0	1	0	THYST setpoint
0	1	1	TOS setpoint
1	0	0	One-shot mode

Temperature Value Register

This 16-bit read only register stores the temperature measured by the internal temperature sensor. The temperature is stored in twos complement format with the MSB being the temperature sign bit. When reading from this register the eight MSBs (Bit D15 to Bit D8) are read first and then the eight LSBs (Bit D7 to Bit D0) are read.

Table 10. Temperature Value Register

Bits	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Default settings at power-up	0	0	0	0	0	0	0	0	0	0	0	0	N/A	N/A	N/A	N/A

Configuration Register

This 8-bit read/write register stores various configuration modes for the ADT75. These modes are shutdown, over temperature interrupt, one-shot, SMBus alert function enable, OS/ALERT pin polarity and over temperature fault queues.

Table 11. Configuration Register

Bits	D7	D6	D5	D4	D3	D2	D1	D0
	OS/SMBus Alert Mode	Reserved		Fault Queue	Fault Queue	OS/Alert Polarity	Cmp/Int	Shutdown
Default Settings at Power-Up	0	0	0	0	0	0	0	0

Table 12.

Bits	Function
D0	Shut-down bit. Setting this bit to 1 puts the ADT75 into shut-down mode. All circuitry except the SMBus/I ² C interface is powered down. To power up the part again, just write 0 to this bit.
D1	This bit selects between comparator and interrupt mode. 0 = Comparator mode. 1 = Interrupt mode.
D2	This bit selects the output polarity of the OS/ALERT pin. 0 = Active low. 1 = Active high.
D4:D3	These two bits set the number of overtemperature faults that occur before setting the OS/ALERT pin. This helps to avoid false triggering due to temperature noise. 00 = 1 fault (Default). 01 = 2 faults. 10 = 4 faults. 11 = 6 faults.
D5	One-shot mode. Setting this bit puts the part into one-shot mode. In this mode, the part is normally powered down until a 0x04 is written to the address pointer register; then a conversion is performed, and the part returns to power down. 0 = Normal mode; powered up and converting every 100 ms. 1 = One-shot mode.
D6	Reserved. Write 0 to this bit.
D7	Interrupt mode only – Enable SMBus Alert Function Mode. This bit can enable the ADT75 to support the SMBus alert function when the Interrupt mode is selected (D1 = 1). 0 = Disable SMBus alert function. The OS/ALERT pin behaves as an OS pin when this bit status is selected. 1 = Enable SMBus alert function.

THYST Setpoint Register

This 16-bit read/write register stores the temperature hysteresis limit for the two interrupt modes. The temperature limit is stored in twos complement format with the MSB being the temperature sign bit. When reading from this register the eight MSBs are read first and then the eight LSBs are read. The default setting has the THYST limit at +75°C.

Table 13. T_{HYST} Setpoint Register

Bits	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Default setting at power-up	0	1	0	0	1	0	1	1	0	0	0	0	N/A	N/A	N/A	N/A

TOS Setpoint Register

This 16-bit read/write register stores the overtemperature limit value for the two interrupt modes. The temperature limit is stored in twos complement format with the MSB being the temperature sign bit. When reading from this register, the eight MSBs are read first and then the eight LSBs are read. The default setting has the TOS limit at +80°C.

Table 14. T_{OS} Setpoint Register

Bits	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Default setting at power-up	0	1	0	1	0	0	0	0	0	0	0	0	N/A	N/A	N/A	N/A

ADT75 SERIAL INTERFACE

Control of the ADT75 is carried out via the SMBus-/I²C-compatible serial interface. The ADT75 is connected to this bus as a slave and is under the control of a master device.

Figure 13 shows a typical SMBus-/I²C- interface connection.

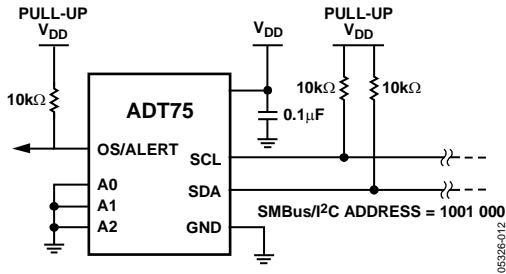


Figure 13. Typical SMBus/I²C Interface Connection

Serial Bus Address

Like all SMBus-/I²C- compatible devices, the ADT75 has a 7-bit serial address. The four MSBs of this address for the ADT75 are set to 1001. The three LSBs are set by Pin 5, Pin 6, and Pin 7 (A2, A1 and A0). These pins can be configured two ways, low and high, to give eight different address options. Table 15 shows the different bus address options available. Recommended pull-up resistor value on the SDA and SCL lines is 10 kΩ .

Table 15. SMBus/I²C Bus Address Options

Binary							Hex
A6	A5	A4	A3	A2	A1	A0	-
1	0	0	1	0	0	0	0x48
1	0	0	1	0	0	1	0x49
1	0	0	1	0	1	0	0x4A
1	0	0	1	0	1	1	0x4B
1	0	0	1	1	0	0	0x4C
1	0	0	1	1	0	1	0x4D
1	0	0	1	1	1	0	0x4E
1	0	0	1	1	1	1	0x4F

The ADT75 has been designed with an SMBus/I²C timeout. The SMBus/I²C interface will timeout after 75 ms to 325 ms of no activity on the SDA line. After this timeout the ADT75 will reset the SDA line back to its idle state (SDA set to high impedance) and wait for the next start condition.

The serial bus protocol operates as follows:

1. The master initiates data transfer by establishing a start condition, defined as a high to low transition on the serial data line SDA while the serial clock line SCL remains high. This indicates that an address/data stream will follow. All slave peripherals connected to the serial bus respond to the START condition and shift in the next eight bits, consisting of a 7-bit address (MSB first) plus a R/W bit. The R/W bit determines whether data will be written to, or read from, the slave device.
2. The peripheral with the address corresponding to the transmitted address responds by pulling the data line low during the low period before the ninth clock pulse, known as the acknowledge bit. All other devices on the bus now remain idle while the selected device waits for data to be read from or written to it. If the R/W bit is a 0 then the master will write to the slave device. If the R/W bit is a 1 the master will read from the slave device.
3. Data is sent over the serial bus in sequences of 9 clock pulses, 8 bits of data followed by an acknowledge bit from the receiver of data. Transitions on the data line must occur during the low period of the clock signal and remain stable during the high period, as a low to high transition when the clock is high may be interpreted as a STOP signal.
4. When all data bytes have been read or written, stop conditions are established. In WRITE mode, the master will pull the data line high during the 10th clock pulse to assert a STOP condition. In READ mode, the master device will pull the data line high during the low period before the 9th clock pulse. This is known as no acknowledge. The master will then take the data line low during the low period before the 10th clock pulse, then high during the 10th clock pulse to assert a STOP condition.

Any number of bytes of data may be transferred over the serial bus in one operation. However, it is not possible to mix read and write in one operation because the type of operation is determined at the beginning and cannot subsequently be changed without starting a new operation.

The I²C address set up by the three address pins is not latched by the device until after this address has been sent twice. On the 8th SCL cycle of the second valid communication, the serial bus address is latched in. This is the SCL cycle directly after the device has seen its own I²C serial bus address. Any subsequent changes on this pin will have no effect on the I²C serial bus address.

WRITING TO THE ADT75

Depending on the register being written to, there are two different writes for the ADT75.

Writing to the Address Pointer Register for a subsequent read

In order to read data from a particular register, the address pointer register must contain the address of that register. If it does not, the correct address must be written to the address pointer register by performing a single-byte write operation, as shown in Figure 14. The write operation consists of the serial bus address followed by the address pointer byte. No data is written to any of the data registers. A read operation is then performed to read the register.

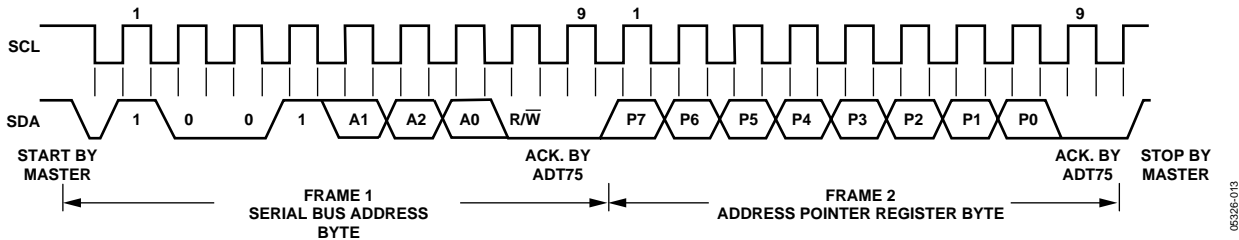


Figure 14. Writing to the Address Pointer Register to select a Register for a Subsequent Read Operation

Writing Data to a Register

The configuration register is 8-bits wide so only one byte of data can be written to this register. Writing a single byte of data to the configuration register consists of the serial bus address, the data register address written to the address pointer register, followed by the data byte written to the selected data register. This is illustrated in Figure 15. The THYST register and the TOS register are 16-bits wide, so two data bytes can be written into these registers. Writing two bytes of data to either one of these register consists of the serial bus address, the data register address written to the address pointer register, followed by the two data bytes written to the selected data register. This is illustrated in Figure 16. If more than the required number of data bytes is written to a register then the register will ignore these extra data bytes. To write to a different register, another START or repeated START is required.

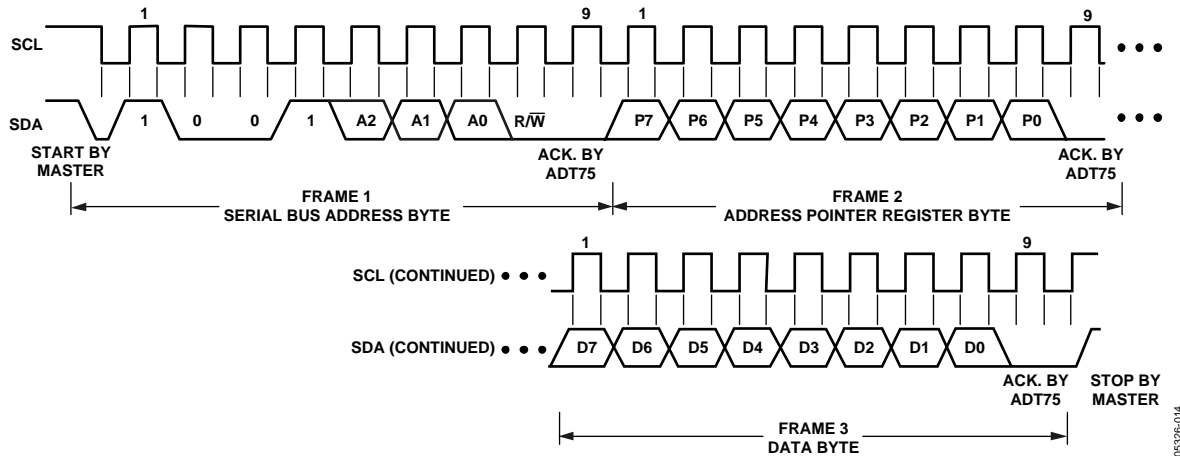


Figure 15. Writing to the Address Pointer Register Followed by a Single Byte of Data to the Configuration Register

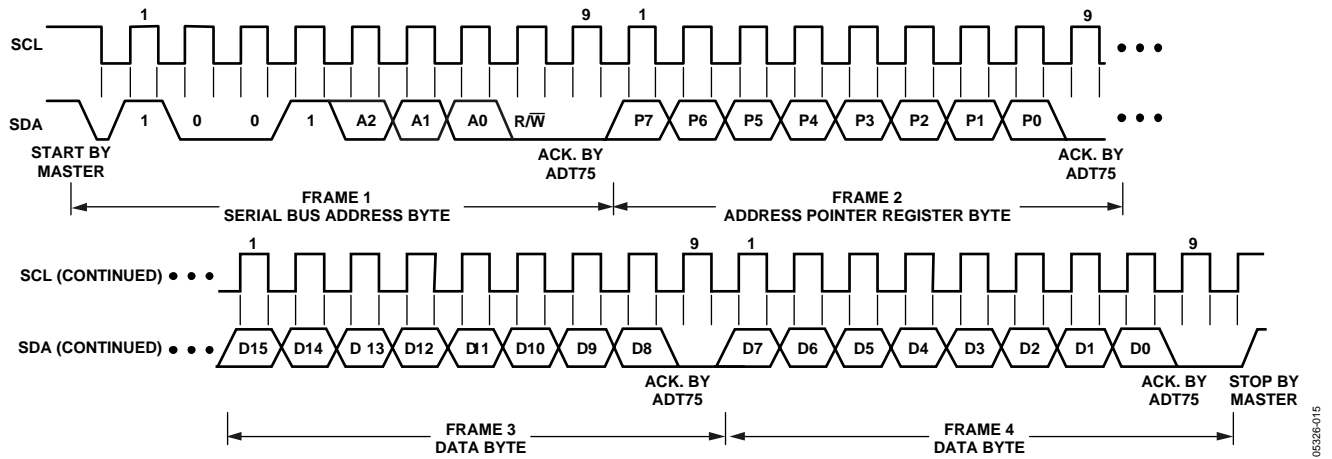


Figure 16. Writing to the Address Pointer Register Followed by two Bytes of Data to either T_{HYST} or T_{OS} Registers

READING DATA FROM THE ADT75

Reading data from the ADT75 is done in a one data byte operation for the configuration register and a two data byte operation for the temperature value register, THYST register and the TOS setpoint register. Reading back the contents of the configuration register is shown in Figure 17. Reading back the contents of the temperature value register is shown in Figure 18 with the register address having been previously set up by a single byte write operation to the address pointer register. To read from another register, execute another write to the address pointer register to set up the relevant register address. Thus, block reads are not possible, that is, there is no I²C autoincrement.

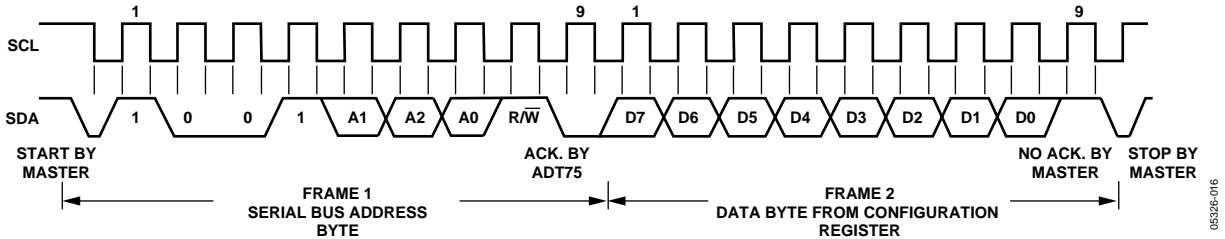


Figure 17. Reading back data from the Configuration Register

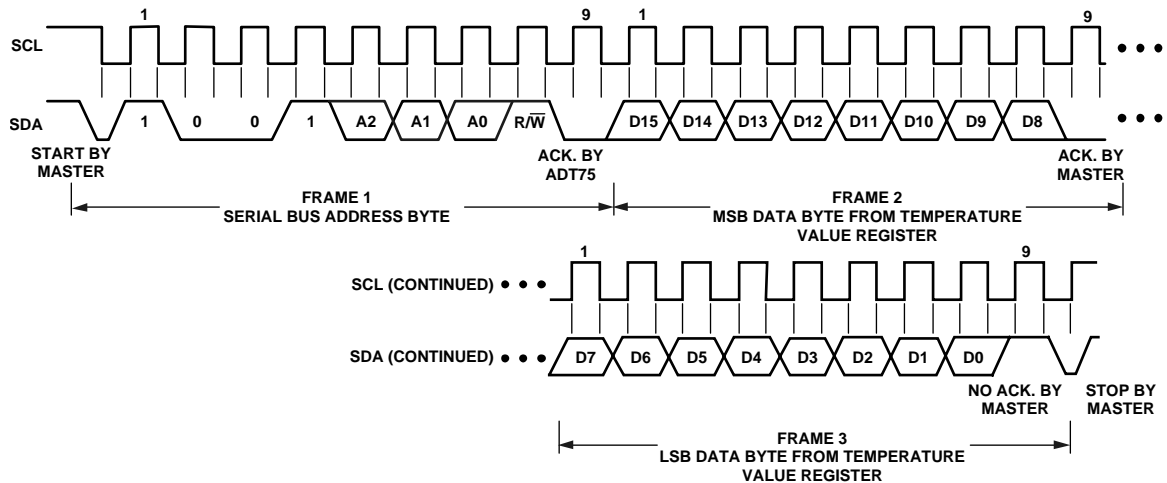


Figure 18. Reading back data from the Temperature Value Register

OS/ALERT OUTPUT OVERTEMPERATURE MODES

The ADT75 has two overtemperature modes, Comparator mode and Interrupt mode. The OS/ALERT pin defaults on power up as an OS pin and the Comparator mode is the default power up overtemperature mode. The OS/ALERT output pin becomes active when the temperature measured exceeds the temperature limit stored in the TOS setpoint register. How this pin reacts after this event depends on the overtemperature mode selected.

In the comparator mode, the OS/ALERT pin will return to its inactive status again when the temperature measured drops below the limit stored in the THYST setpoint register. Putting the ADT75 into shutdown mode does not reset the OS/ALERT state in comparator mode.

In the interrupt mode the OS/ALERT pin will go inactive only when any ADT75 register is read. The OS/ALERT pin can only return to active status if the temperature measured is below the limit stored in the THYST setpoint register. Once the OS/ALERT pin has been reset it will go active again only when the temperature has gone above the TOS limit. The OS/ALERT pin can also be reset by an SMBus alert response address (ARA) when this pin has been selected as an SMBus alert pin. More information is given in the SMBUS Alert section.

Figure 19 illustrates the comparator and interrupt modes with both pin polarity settings. Placing the ADT75 into shutdown mode does reset the OS/ALERT pin in the interrupt mode.

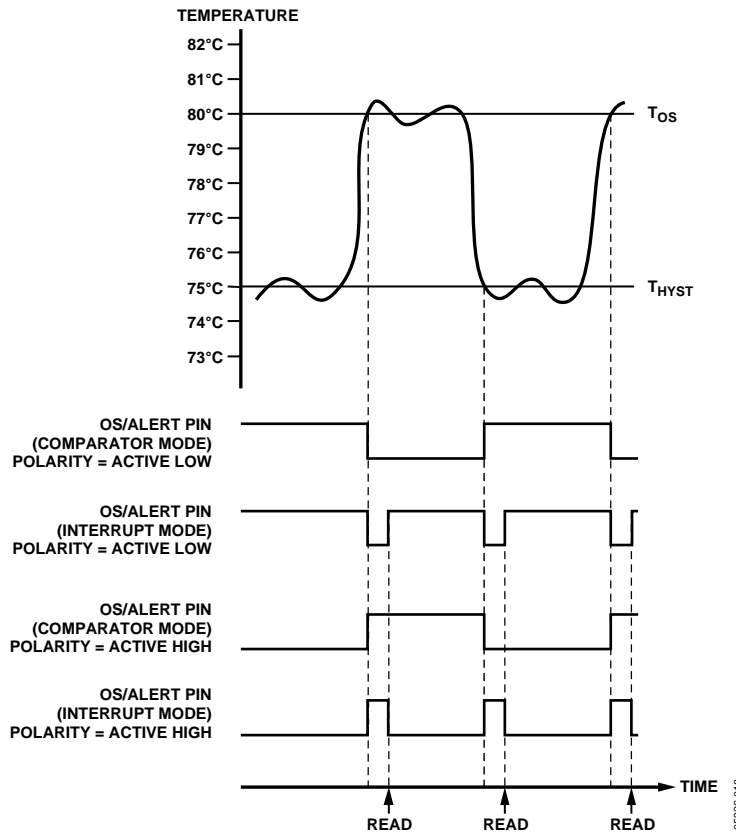


Figure 19. OS/ALERT Output Temperature Response Diagram

SMBus ALERT

The OS/ALERT pin can behave as an SMBus alert pin when the SMBus alert function is enabled by setting Bit D7 in the Configuration register. The interrupt mode must also be selected (Bit D1 in the configuration register). It is an open-drain output and requires a pull-up to V_{DD} . Several SMBus alert outputs can be wire-AND'ed together, so that the common line will go low if one or more of the SMBus alert outputs goes low. The polarity of the OS/ALERT pin must be set for active low for a number of outputs to be wire-AND'ed together.

The OS/ALERT output can operate as an $\overline{\text{SMBALERT}}$ function. Slave devices on the SMBus normally can not signal to the master that they want to talk, but the $\overline{\text{SMBALERT}}$ function allows them to do so. $\overline{\text{SMBALERT}}$ is used in conjunction with the SMBus general call address.

One or more SMBus alert outputs can be connected to a common $\overline{\text{SMBALERT}}$ line connected to the master. When the $\overline{\text{SMBALERT}}$ line is pulled low by one of the devices, the following procedure occurs as shown in Figure 20.

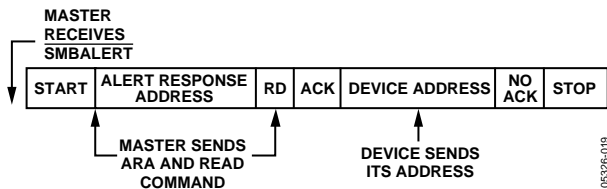


Figure 20. ADT75 Responds to $\overline{\text{SMBALERT}}$ ARA

05326-019

1. $\overline{\text{SMBALERT}}$ is pulled low.
2. Master initiates a read operation and sends the SMBus alert response address (ARA = 0001 100). This is a reserved SMBus/I²C address that must not be used as a specific device address.
3. The device whose SMBus alert output is low responds to the SMBus alert response address and the master reads its device address. As the device address is seven bits long, the ADT75's LSB is free to be used as an indicator to which temperature limit was exceeded. The LSB will be high if the temperature is greater than or equal to T_{OS} , and the LSB will be low if the temperature is less than T_{HYST} . The address of the device is now known and it can be interrogated in the usual way.
4. If more than one device's SMBus alert output is low, the one with the lowest device address will have priority, in accordance with normal SMBus specifications.

Once the ADT75 has responded to the SMBus alert response address, it will reset its SMBus alert output. If the $\overline{\text{SMBALERT}}$ line remains low, the master will send the ARA again. It will continue to do this until all devices whose $\overline{\text{SMBALERT}}$ outputs were low have responded.

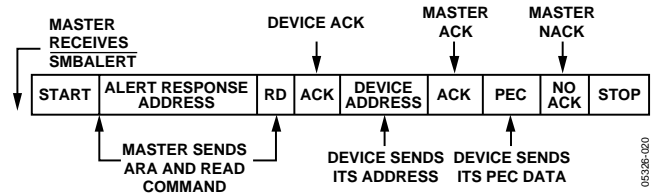


Figure 21. ADT75 Responds to $\overline{\text{SMBALERT}}$ ARA with Packet Error Checking (PEC)

05326-020

APPLICATION INFORMATION

THERMAL RESPONSE TIME

The time required for a temperature sensor to settle to a specified accuracy is a function of the thermal mass of the sensor and the thermal conductivity between the sensor and the object being sensed. Thermal mass is often considered equivalent to capacitance. Thermal conductivity is commonly specified using the symbol Q , and can be thought of as thermal resistance. It is commonly specified in units of degrees per watt of power transferred across the thermal joint. Thus, the time required for the ADT75 to settle to the desired accuracy is dependent on the package selected, the thermal contact established in that particular application, and the equivalent power of the heat source. In most applications, the settling time is probably best determined empirically.

SELF-HEATING EFFECTS

The temperature measurement accuracy of the ADT75 might be degraded in some applications due to self-heating. Errors can be introduced from the quiescent dissipation and power dissipated when converting. The magnitude of these temperature errors is dependent on the thermal conductivity of the ADT75 package, the mounting technique, and the effects of airflow. At 25°C, static dissipation in the ADT75 is typically 640 μ W operating at 3.3 V. In the 8-lead MSOP package mounted in free air, this accounts for a temperature increase due to self-heating of

$$\Delta T = P_{DISS} \times \theta_{JA} = 640 \mu\text{W} \times 205.9^\circ\text{C}/\text{W} = 0.13^\circ\text{C}$$

It is recommended that current dissipated through the device be kept to a minimum, because it has a proportional effect on the temperature error.

Using the power-down mode can reduce the current dissipated through the ADT75 subsequently reducing the self-heating effect. When the ADT75 is in power-down mode and operating at 25°C, static dissipation in the ADT75 is typically 68.7 μ W with $V_{DD} = 3.3$ V and the power-up/conversion rate is 1 SPS (sample per second). In the 8-lead MSOP package mounted in free air, this accounts for a temperature increase due to self-heating of

$$\Delta T = P_{DISS} \times \theta_{JA} = 68.7 \mu\text{W} \times 205.9^\circ\text{C}/\text{W} = 0.014^\circ\text{C}$$

SUPPLY DECOUPLING

The ADT75 should be decoupled with a 0.1 μ F ceramic capacitor between V_{DD} and GND. This is particularly important when the ADT75 is mounted remotely from the power supply. Precision analog products such as the ADT75 require a well-filtered power source. Because the ADT75 operates from a single supply, it might seem convenient to simply tap into the digital logic power supply.

Unfortunately, the logic supply is often a switch-mode design, which generates noise in the 20 kHz to 1 MHz range. In addition, fast logic gates can generate glitches hundreds of mV in amplitude due to wiring resistance and inductance.

If possible, the ADT75 should be powered directly from the system power supply. This arrangement, shown in Figure 22, isolates the analog section from the logic switching transients. Even if a separate power supply trace is not available, however, generous supply bypassing reduces supply-line-induced errors. Local supply bypassing consisting of a 0.1 μ F ceramic capacitor is critical for the temperature accuracy specifications to be achieved. This decoupling capacitor must be placed as close as possible to the ADT75 V_{DD} pin.

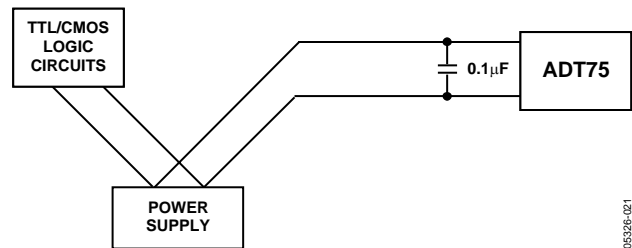


Figure 22. Use Separate Traces to Reduce Power Supply Noise

TEMPERATURE MONITORING

The ADT75 is ideal for monitoring the thermal environment within electronic equipment. For example, the surface-mounted package accurately reflects the exact thermal conditions that affect nearby integrated circuits.

The ADT75 measures and converts the temperature at the surface of its own semiconductor chip. When the ADT75 is used to measure the temperature of a nearby heat source, the thermal impedance between the heat source and the ADT75 must be considered. Often, a thermocouple or other temperature sensor is used to measure the temperature of the source, while the temperature is monitored by reading back from the ADT75's temperature value register.

Once the thermal impedance is determined, the temperature of the heat source can be inferred from the ADT75 output. As much as 60% of the heat transferred from the heat source to the thermal sensor on the ADT75 die is discharged via the copper tracks, the package pins and the bond pads. Of the pins on the ADT75, the GND pin transfers most of the heat. Therefore, to measure the temperature of a heat source it is recommended that the thermal resistance between the ADT75 GND pin and the GND of the heat source is reduced as much as possible.

One example of using the ADT75's unique properties is in monitoring a high power dissipation microprocessor. The ADT75 device, in a surface-mounted package, is mounted directly beneath the microprocessor's pin grid array (PGA) package. The ADT75 produces a linear temperature output while needing only two I/O pins and requiring no external characterization.

OUTLINE DIMENSIONS


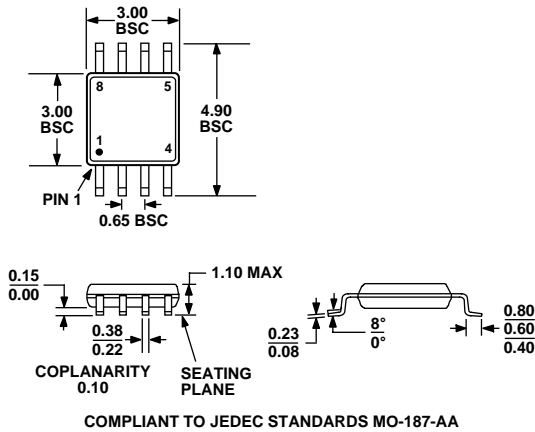


Figure 23. 8-Lead Mini Small Outline Package [MSOP] (RM-8)
Dimensions shown in millimeters

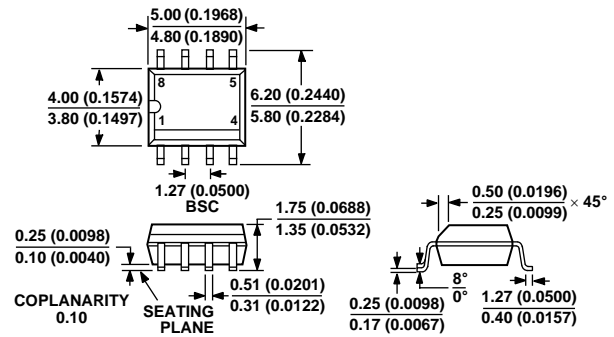

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN

Figure 24. 8-Lead Standard Small Outline Package [SOIC_N] (R-8)
Dimensions shown in millimeters

ORDERING GUIDE

Model	Temperature Range	Temperature Accuracy	Package Description	Package Option	Branding
ADT75ARM	-55°C to +125°C	±2°C ¹	8-Lead MSOP	RM-8	T5A
ADT75ARM-REEL7	-55°C to +125°C	±2°C ¹	8-Lead MSOP	RM-8	T5A
ADT75ARM-REEL	-55°C to +125°C	±2°C ¹	8-Lead MSOP	RM-8	T5A
ADT75ARMZ ²	-55°C to +125°C	±2°C ¹	8-Lead MSOP	RM-8	T5B
ADT75ARMZ-REEL7	-55°C to +125°C	±2°C ¹	8-Lead MSOP	RM-8	T5B
ADT75ARMZ-REEL ²	-55°C to +125°C	±2°C ¹	8-Lead MSOP	RM-8	T5B
ADT75ARZ ²	-55°C to +125°C	±2°C ¹	8-Lead SOIC	R-8	ADT75A#
ADT75ARZ-REEL7 ²	-55°C to +125°C	±2°C ¹	8-Lead SOIC	R-8	ADT75A#
ADT75ARZ-REEL ²	-55°C to +125°C	±2°C ¹	8-Lead SOIC	R-8	ADT75A#
ADT75BRMZ ²	-55°C to +125°C	±1°C ³	8-Lead MSOP	RM-8	T5C
ADT75BRMZ-REEL7	-55°C to +125°C	±1°C ³	8-Lead MSOP	RM-8	T5C
ADT75BRMZ-REEL ²	-55°C to +125°C	±1°C ³	8-Lead MSOP	RM-8	T5C

¹ A-Grade temperature accuracy is over the -25°C to +100°C temperature range.

² Pb-free part.

³ B-Grade temperature accuracy is over the 0°C to +70°C temperature range

NOTES

NOTES

Purchase of licensed I²C components of Analog Devices or one of its sublicensed Associated Companies conveys a license for the purchaser under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.