

MAXIM

MAX1748 Evaluation Kit

Evaluates: MAX1748

General Description

The MAX1748 evaluation kit (EV kit) is a fully assembled and tested surface-mount circuit board that contains a boost switching regulator and two charge-pump voltage-regulator circuits. The boost switching circuit is configured for a +10V output that provides up to 200mA of current from a supply voltage of +2.7V to +5.5V.

The positive charge-pump circuit is configured for a +15V output that provides >20mA of current. The negative charge-pump circuit is configured for a -5V output and provides >20mA of current. Power for either or both charge-pump inputs can be provided from the +2.7VDC to +5.5VDC source or from the boost switching-regulator output.

The MAX1748 EV kit demonstrates low quiescent current and high efficiency (over 86%) for maximum battery life. Operation at 1MHz allows the use of tiny surface-mount components. The MAX1748 TSSOP package (1.1mm max) with low-profile external components allows this circuit to be less than 1.2mm high.

Features

- ◆ +2.7V to +5.5V Input Range (as Configured)
- ◆ Output Voltages
 - +10V Output at 200mA (Boost Switching)
 - +15V Output >20mA (Positive Charge-Pump Regulator)
 - 5V Output >20mA (Negative Charge-Pump Regulator)
- ◆ Outputs Are Adjustable with Resistors
- ◆ >85% Efficiency
- ◆ Internal MOSFET Switches
- ◆ 0.1 μ A (typ) IC Shutdown Current
- ◆ 1MHz Boost Switching Frequency, 500kHz Charge-Pump Switching Frequency
- ◆ Low Profile
- ◆ Surface-Mount Components
- ◆ Fully Assembled and Tested

Ordering Information

PART	TEMP. RANGE	IC PACKAGE
MAX1748EVKIT	0°C to +70°C	16 TSSOP

Component List

DESIGNATION	QTY	DESCRIPTION
C1, C16, C17, C18, C21	5	3.3 μ F, 10V X7R ceramic caps (1210) Taiyo Yuden LMK325BJ335KD
C2, C4, C5, C6, C22, C23	6	0.1 μ F, 16V X7R ceramic caps (0603) Taiyo Yuden EMK107BJ104MA
C3	0	Not installed (R) Sprague 592D336X0016R2T recommended
C7, C15, C24	3	1 μ F, 16V X5R ceramic caps (1206) Murata GRM42-6X5R105K016
C8	1	470pF, 10V X5R ceramic cap (0603) Taiyo Yuden LMK107BJ474KA
C9	1	0.22 μ F, 10V X7R ceramic cap (0603) Taiyo Yuden LMK107BJ224KA
C10 - C13	0	Not installed (0805)
C14	1	0.15 μ F, 25V X7R ceramic cap (1206) Taiyo Yuden TMK316BJ154MD
C19, C20	0	Not installed, ceramic capacitors (0603)
D1	1	1.0A, 30V Schottky diode (S-flat) Toshiba CRS02 or Nihon EP10QY03

DESIGNATION	QTY	DESCRIPTION
D2, D3	2	200mA, 25V Schottky diodes (SOT23) Fairchild BAT54S
D4, D5	0	Not installed (SOT23)
L1	1	6.8 μ H inductor Coilcraft LPO2506IB-682
R1	1	348k Ω \pm 1% resistor (0805)
R3	1	549k Ω \pm 1% resistor (0805)
R2, R4, R6	3	49.9k Ω \pm 1% resistors (0805)
R5	1	200k Ω \pm 1% resistor (0805)
R7	0	Not installed (0805)
R8, R9	2	1M Ω \pm 5% resistors (0805)
U1	1	MAX1748EUE (16-pin TSSOP)
JU1, JU4, JU5	3	3-pin headers
None	3	Shunts (JU1, JU4, JU5)
None	1	MAX1748 PC board
None	1	MAX1748 data sheet
None	1	MAX1748 EV kit data sheet

MAX1748 Evaluation Kit

Component Suppliers

SUPPLIER	PHONE	FAX
Coilcraft	847-639-6400	847-639-1469
Fairchild	408-822-2000	408-822-2102
Murata	814-237-1431	814-238-0490
Sprague	603-224-1961	603-224-1430
Taiyo Yuden	408-573-4150	408-573-4159
Toshiba	949-455-2000	949-859-3963

Note: Please indicate that you are using the MAX1748 when contacting these component suppliers.

Quick Start

The MAX1748 EV kit is fully assembled and tested. Perform the following steps to verify board operation for a +10V output. **Do not turn on the power supply until all connections are completed:**

- 1) Connect a +2.7VDC to +5.5VDC power supply to the PIN pad. Connect the supply ground to the GND pad.
- 2) Connect a voltmeter to the V1 pad.
- 3) Verify that shunts JU1 ($\overline{\text{SHDN}}$) are across pins 1 and 2 and that shunts JU4 (SUPP) and JU5 (SUPN) are across pins 2 and 3.
- 4) Turn on the power supply and verify that the main output (V1) is +10V.
- 5) Verify that the negative charge-pump regulator output (VN) is -5V.
- 6) Verify that the positive charge-pump regulator output (VP) is +15V.

For instructions on selecting the feedback resistors for other output voltages, see the *Output Voltages* selection. The input voltage range is +2.7V to +5.5V when selecting the output voltage.

Detailed Description

The MAX1748 EV kit contains a boost switching regulator and two regulating charge pumps. The EV kit operates from a +2.7V to +5.5V input voltage range. The boost switching regulator provides up to 200mA with a +10V output.

The positive charge-pump regulator generates a +15V output and can provide >20mA of current. The negative charge-pump regulator generates -5V output and can provide >20mA of current. Jumper options allow either charge pump to be fed power from PIN or V1.

The boost switching-regulator output voltage can be adjusted from +2.7V to +13V with resistors. The positive

charge-pump regulator's output can be adjusted up to +25V, and the negative regulator can be adjusted to -15V with resistors.

The MAX1748 EV kit charge-pump circuits feature PC board pads for a positive voltage tripling and negative voltage doubling output circuits.

Jumper Selection

Shutdown Mode

The MAX1748 EV kit features a shutdown mode that reduces the MAX1748 quiescent current, preserving battery life. The 3-pin jumper (JU1) selects the shutdown mode for the MAX1748. Table 1 lists the selectable jumper options.

Positive Charge-Pump Regulator Feedback

In the MAX1748 EV kit, jumper JU2 selects which positive charge pump will be regulated: VP, a voltage doubler, or VPA, a voltage tripler. Table 2 lists the positive charge-pump regulator jumper options.

Negative Charge-Pump Regulator Feedback

In the MAX1748 EV kit, jumper JU3 selects which negative charge pump will be regulated: VN or VNA, a voltage doubler. Table 3 lists the negative regulator jumper options.

Table 1. Jumper JU1 Functions

SHUNT LOCATION	$\overline{\text{SHDN}}$ PIN	MAX1748 OUTPUT
1-2	Connected to PIN	MAX1748 enabled, V1 = +10V
2-3	Connected to GND	Shutdown mode, V1 = PIN - VDIODE

Table 2. Jumper JU2 Functions

SHUNT LOCATION	R3	OPERATING MODE
1-2 (PC trace shorts 1-2)	Connected to VP	Regulate VP, doubler output voltage
2-3 (cut open trace across 1-2, short across 2-3)	Connected to VPA	Regulate VPA, tripler output voltage

Table 3. Jumper JU3 Functions

SHUNT LOCATION	R5	OPERATING MODE
1-2 (PC trace shorts 1-2)	Connected to VN	Regulate VN, -5V output voltage
2, 3 (cut open trace across 1-2, short across 2-3)	Connected to VNA	Regulate VNA, negative doubler output voltage

MAX1748 Evaluation Kit

Evaluates: MAX1748

Table 4. Jumper JU4 Functions

SHUNT LOCATION	SUPP PIN	OPERATING MODE
1-2	Connected to PIN	PIN voltage source feeds positive charge-pump input
2-3	Connected to V1	Boost converter (V1) feeds positive charge-pump input

Table 5. Jumper JU5 Functions

SHUNT LOCATION	SUPN PIN	OPERATING MODE
1-2	Connected to PIN	PIN voltage source feeds negative charge-pump input
2-3	Connected to V1	Boost converter (V1) feeds negative charge-pump input

Positive Voltage Source

The MAX1748 EV kit features an option to choose which voltage source feeds the positive charge-pump regulator circuit. Jumper JU4 selects the input voltage source for the MAX1748's SUPP pin. Table 4 lists the options.

Negative Voltage Source

The MAX1748 EV kit features an option to choose which voltage source feeds the negative charge-pump regulator circuit. Jumper JU5 selects the input voltage source for the MAX1748's SUPN pin. Table 5 lists the options.

Output Voltage Selection

Boost Switching-Regulator Output Voltages

The MAX1748 EV kit's boost switching-regulator output is set to +10V by feedback resistors (R1, R2). To generate output voltages other than +10V (+2.7V to +13V), select different external voltage-divider resistors (R1, R2). The ceramic capacitors (C17, C18, C20) are rated to +10V. To set the voltage >+10V, use higher-voltage-rated capacitors. Refer to the *Output Voltage Selection* section in the MAX1748 data sheet for instructions on selecting the resistors. The input voltage range will be +2.7V to V_{PIN} when selecting other output voltages.

Positive Charge-Pump Output Voltages

The MAX1748 EV kit's positive charge-pump regulator output is set to +15V by feedback resistors (R3, R4). To generate output voltages other than +15V, select different external voltage-divider resistors (R3, R4). Refer to the *Output Voltage Selection* section in the MAX1748 data sheet for instructions on selecting the resistors. See Table 4 for the jumper selection of input voltage ranges.

Check that the capacitor voltage rating is adequate for the configuration.

Positive Tripler Charge-Pump Output Voltages

The MAX1748 EV kit features a positive charge-pump voltage tripler circuit. Three components (C10, C11, D4) must be installed and jumper JU2 modified to utilize the tripler circuit. Capacitors C10 and C11 should be 0.1 μ F (Taiyo Yuden, UMK212BJ104MG recommended) with a voltage rating equal to or greater than the expected output voltage at VPA. Lower cost diodes with higher forward voltage drops can be used for D4, if enough voltage headroom is available. The shorted PC trace across pinholes 1 and 2 must be cut open and a jumper wire installed in pinholes 2 and 3 at jumper JU2. **Note:** VPA will now be the regulated output.

To generate a different voltage, select proper voltage-divider resistors (R3, R4) while taking into consideration input voltages and jumper settings. Refer to the *Output Voltage Selection* section in the MAX1748 data sheet for instructions on selecting the resistors. See Table 4 for jumper selection of input voltage ranges.

Negative Charge-Pump Output Voltages

The MAX1748 EV kit's negative charge-pump regulator output is set to -5V by feedback resistors (R5, R6). To generate different voltages, select different external voltage-divider resistors (R5, R6) while taking into consideration input voltages and jumper settings. Refer to the *Output Voltage Selection* section in the MAX1748 data sheet for instructions on selecting the resistors. See Table 5 for the jumper selection of input voltage ranges.

Negative Doubler Charge-Pump Output Voltages

The MAX1748 EV kit features a negative charge-pump voltage doubler circuit. Three components (C12, C13, D5) must be installed and jumper JU3 modified to utilize the doubler circuit. Capacitors C12 and C13 should be 0.1 μ F (Taiyo Yuden UMK212BJ104MG recommended) with a voltage rating equal to or greater than the expected output voltage at VNA. Lower cost diodes with higher forward voltage drops can be used for D5 if enough voltage headroom is available. The shorted PC trace across pinholes 1 and 2 must be cut open and a jumper wire installed in pinholes 2 and 3 at jumper JU3.

To generate a different negative output voltage, select different external voltage-divider resistors (R5, R6) while taking into consideration input voltages and jumper settings. Refer to the *Output Voltage Selection* section in the MAX1748 data sheet for instructions on selecting the resistors. See Table 5 for jumper selection of input voltage ranges.

MAX1748 Evaluation Kit

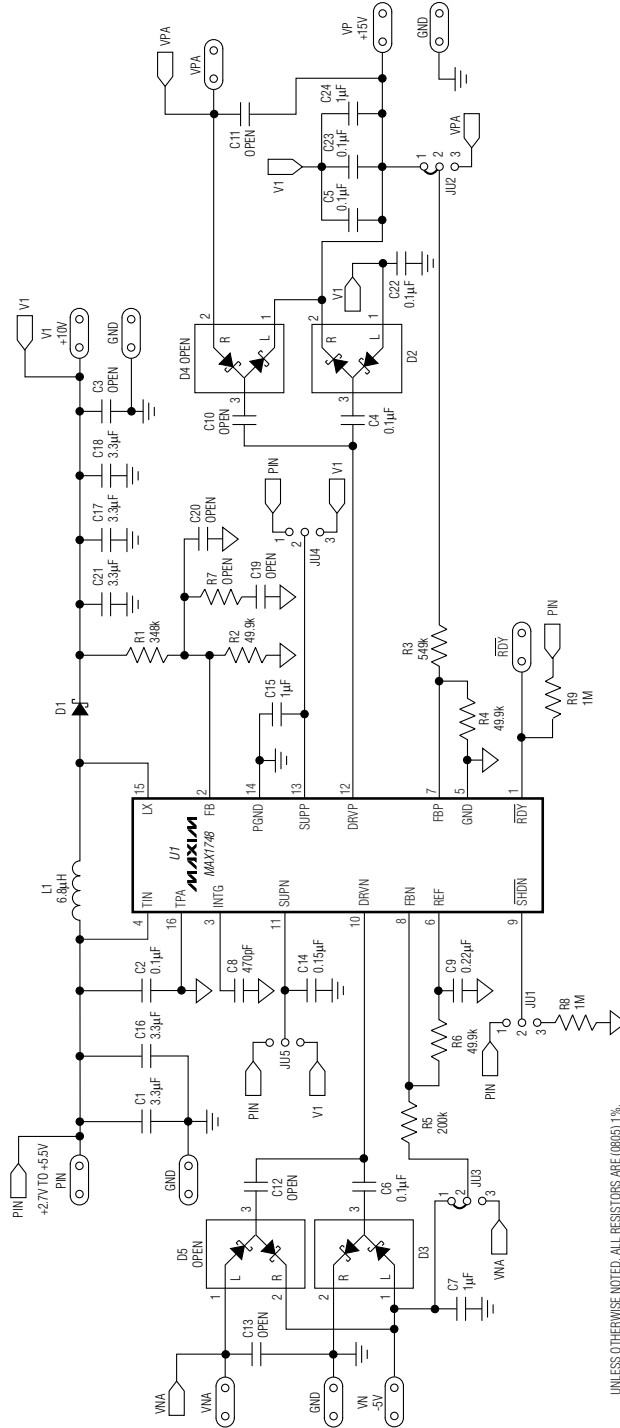


Figure 1. MAX1748 EV Kit Schematic

MAX1748 Evaluation Kit

Evaluates: MAX1748

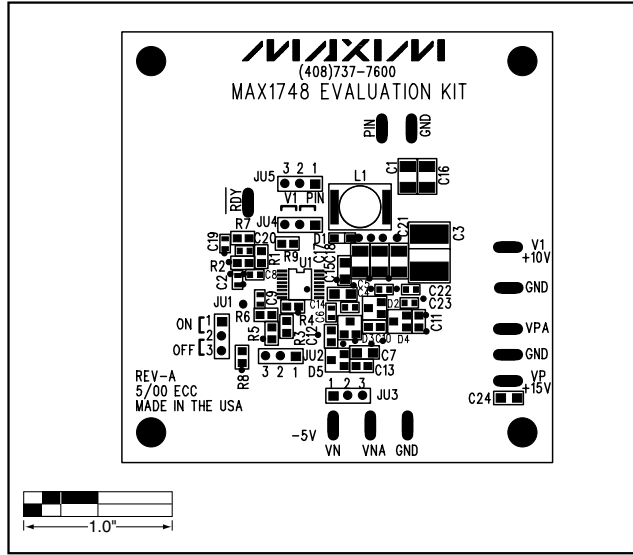


Figure 2. MAX1748 EV Kit Component Placement Guide—Component Side

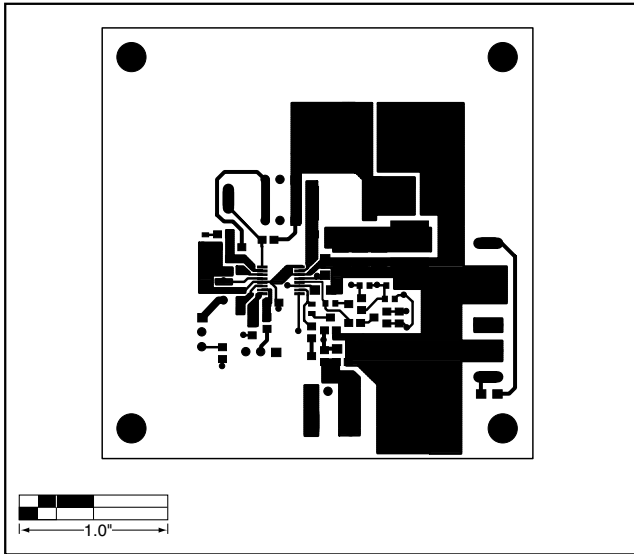


Figure 3. MAX1748 EV Kit PC Board Layout—Component Side

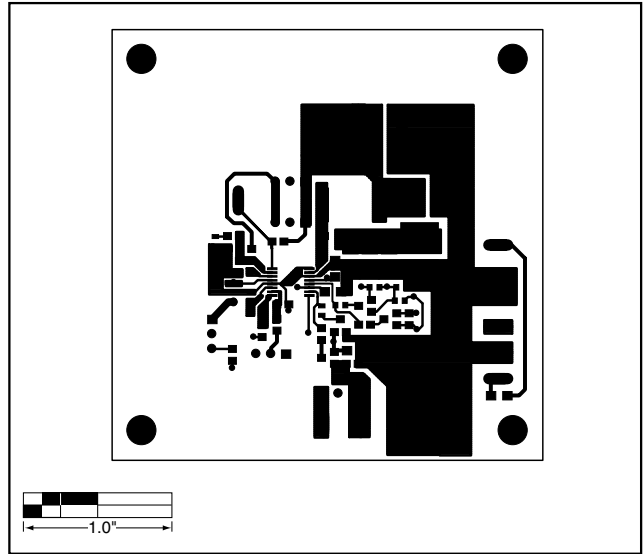


Figure 4. MAX1748 EV Kit PC Board Layout—Solder Side

MAX1748 Evaluation Kit

Evaluates: MAX1748

NOTES

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

6 _____ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2000 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.