

74AUP1Z04-Q100

Low-power X-tal driver with enable and internal resistor

Rev. 3 — 17 July 2023

Product data sheet

1. General description

The 74AUP1Z04-Q100 is a crystal driver with enable and internal resistor. When not in use the $\overline{\text{EN}}$ input can be driven HIGH, putting the device in a low power disable mode with X1 pulled HIGH via R_{PU} , X2 set LOW and Y set HIGH. Schmitt trigger action on the $\overline{\text{EN}}$ input makes the circuit tolerant to slower input rise and fall times across the entire V_{CC} range from 0.8 V to 3.6 V.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

2. Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
 - Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Wide supply voltage range from 0.8 V to 3.6 V
- CMOS low power dissipation
- High noise immunity
- Overvoltage tolerant inputs to 3.6 V
- Low noise overshoot and undershoot < 10 % of V_{CC}
- I_{OFF} circuitry provides partial Power-down mode operation at output Y
- Latch-up performance exceeds 100 mA per JESD78B Class II
- Complies with JEDEC standards:
 - JESD8-12 (0.8 V to 1.3 V)
 - JESD8-11 (0.9 V to 1.65 V)
 - JESD8-7 (1.65 V to 1.95 V)
 - JESD8-5 (2.3 V to 2.7 V)
 - JESD8C (2.7 V to 3.6 V)
- ESD protection:
 - HBM: ANSI/ESDA/JEDEC JS-001 class 3A exceeds 5000 V
 - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V

3. Ordering information

Table 1. Ordering information

| Type number | Package | | | Version |
|----------------------------------|-------------------|--------|--|--------------------------|
| | Temperature range | Name | Description | |
| 74AUP1Z04GW-Q100 | -40 °C to +125 °C | TSSOP6 | plastic thin shrink small outline package; 6 leads; body width 1.25 mm | SOT363-2 |


4. Marking

Table 2. Marking

| Type number | Marking code[1] |
|------------------|-----------------|
| 74AUP1Z04GW-Q100 | a4 |


[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

5. Functional diagram

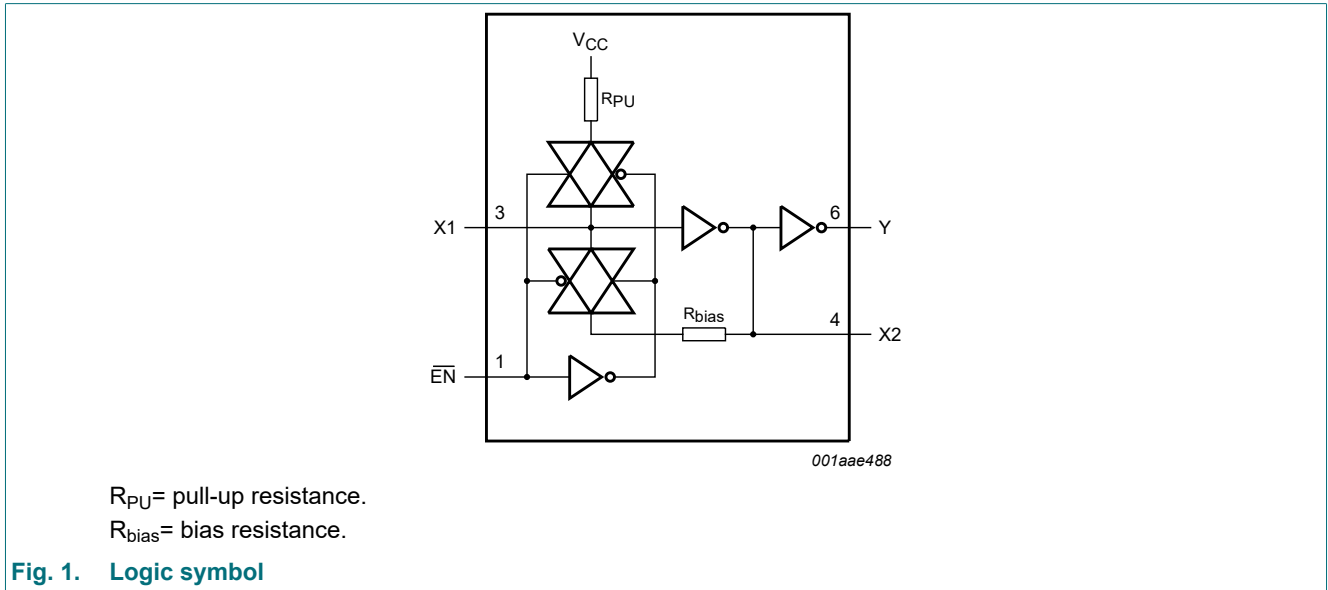

6. Pinning information

6.1. Pinning

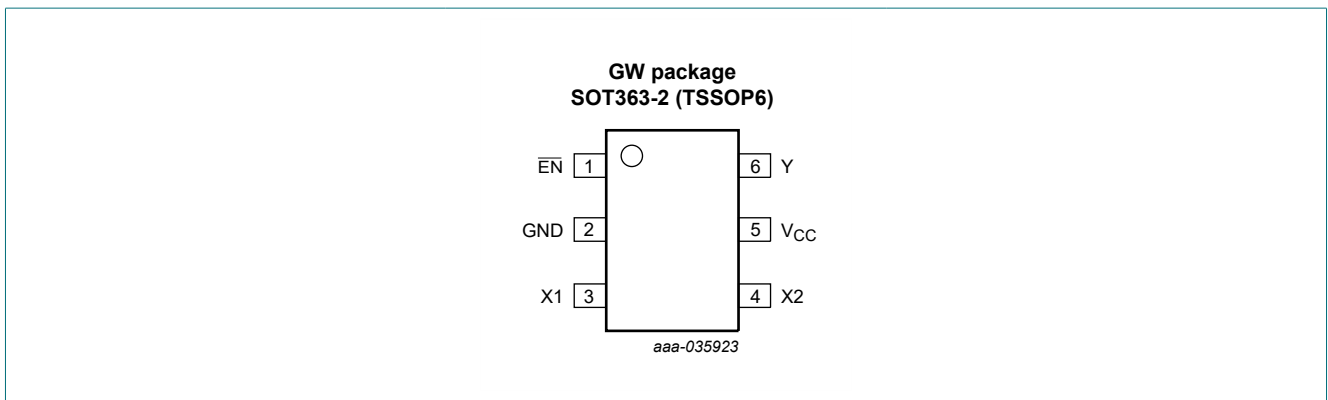

6.2. Pin description

Table 3. Pin description

| Symbol | Pin | Description |
|-----------------|-----|---------------------------|
| EN | 1 | enable input (active LOW) |
| GND | 2 | ground (0 V) |
| X1 | 3 | data input |
| X2 | 4 | data output |
| V _{CC} | 5 | supply voltage |
| Y | 6 | data output |

7. Functional description

Table 4. Function table

H = HIGH voltage level; L = LOW voltage level.

| Input | | Output | |
|-------|----|--------|---|
| EN | X1 | X2 | Y |
| L | L | H | L |
| L | H | L | H |
| H | L | H | L |
| H | H | L | H |

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | Min | Max | Unit |
|------------------|-------------------------|---|----------|-----------------------|------|
| V _{CC} | supply voltage | | -0.5 | +4.6 | V |
| I _{IK} | input clamping current | V _I < 0 V | -50 | - | mA |
| V _I | input voltage | | [1] -0.5 | +4.6 | V |
| I _{OK} | output clamping current | V _O < 0 V | -50 | - | mA |
| V _O | output voltage | | [1] -0.5 | V _{CC} + 0.5 | V |
| I _O | output current | V _O = 0 V to V _{CC} | - | ±20 | mA |
| I _{CC} | supply current | | - | 50 | mA |
| I _{GND} | ground current | | -50 | - | mA |
| T _{stg} | storage temperature | | -65 | +150 | °C |
| P _{tot} | total power dissipation | T _{amb} = -40 °C to +125 °C | [2] - | 250 | mW |

[1] The minimum input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SOT363-2 (TSSOP6) package: P_{tot} derates linearly with 3.7 mW/K above 83 °C.

9. Recommended operating conditions

Table 6. Recommended operating conditions

| Symbol | Parameter | Conditions | Min | Max | Unit |
|---------------------|-------------------------------------|---|-----|----------|------|
| V_{CC} | supply voltage | | 0.8 | 3.6 | V |
| V_I | input voltage | | 0 | 3.6 | V |
| V_O | output voltage | | 0 | V_{CC} | V |
| T_{amb} | ambient temperature | | -40 | +125 | °C |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 0.8\text{ V to }3.6\text{ V}$ | - | 200 | ns/V |

10. Static characteristics

Table 7. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------------------|--------------------------|--|----------------------|-----|----------------------|------|
| $T_{amb} = 25\text{ °C}$ | | | | | | |
| V_{IH} | HIGH-level input voltage | X1 input | | | | |
| | | $V_{CC} = 0.8\text{ V to }3.6\text{ V}$ | $0.75 \times V_{CC}$ | - | - | V |
| | | EN input | | | | |
| | | $V_{CC} = 0.8\text{ V}$ | $0.70 \times V_{CC}$ | - | - | V |
| | | $V_{CC} = 0.9\text{ V to }1.95\text{ V}$ | $0.65 \times V_{CC}$ | - | - | V |
| | | $V_{CC} = 2.3\text{ V to }2.7\text{ V}$ | 1.6 | - | - | V |
| | | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | 2.0 | - | - | V |
| V_{IL} | LOW-level input voltage | X1 input | | | | |
| | | $V_{CC} = 0.8\text{ V to }3.6\text{ V}$ | - | - | $0.25 \times V_{CC}$ | V |
| | | EN input | | | | |
| | | $V_{CC} = 0.8\text{ V}$ | - | - | $0.30 \times V_{CC}$ | V |
| | | $V_{CC} = 0.9\text{ V to }1.95\text{ V}$ | - | - | $0.35 \times V_{CC}$ | V |
| | | $V_{CC} = 2.3\text{ V to }2.7\text{ V}$ | - | - | 0.7 | V |
| | | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | - | - | 0.9 | V |

Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit | | |
|--|---------------------------|---|--------------------------|---|-----------------------|------|-----|---|
| V _{OH} | HIGH-level output voltage | Y output; V _I at X1 input = V _{IH} or V _{IL} | | | | | | |
| | | I _O = -20 μA; V _{CC} = 0.8 V to 3.6 V | V _{CC} - 0.1 | - | - | V | | |
| | | I _O = -1.1 mA; V _{CC} = 1.1 V | 0.75 × V _{CC} | - | - | V | | |
| | | I _O = -1.7 mA; V _{CC} = 1.4 V | 1.11 | - | - | V | | |
| | | I _O = -1.9 mA; V _{CC} = 1.65 V | 1.32 | - | - | V | | |
| | | I _O = -2.3 mA; V _{CC} = 2.3 V | 2.05 | - | - | V | | |
| | | I _O = -3.1 mA; V _{CC} = 2.3 V | 1.9 | - | - | V | | |
| | | I _O = -2.7 mA; V _{CC} = 3.0 V | 2.72 | - | - | V | | |
| | | I _O = -4.0 mA; V _{CC} = 3.0 V | 2.6 | - | - | V | | |
| | | X2 output; V _I = GND or V _{CC} | | | | | | |
| | | I _O = -20 μA; V _{CC} = 0.8 V to 3.6 V | V _{CC} - 0.1 | - | - | V | | |
| | | I _O = -1.1 mA; V _{CC} = 1.1 V | 0.75 × V _{CC} | - | - | V | | |
| | | I _O = -1.7 mA; V _{CC} = 1.4 V | 1.11 | - | - | V | | |
| | | I _O = -1.9 mA; V _{CC} = 1.65 V | 1.32 | - | - | V | | |
| | | I _O = -2.3 mA; V _{CC} = 2.3 V | 2.05 | - | - | V | | |
| | | I _O = -3.1 mA; V _{CC} = 2.3 V | 1.9 | - | - | V | | |
| | | I _O = -2.7 mA; V _{CC} = 3.0 V | 2.72 | - | - | V | | |
| | | I _O = -4.0 mA; V _{CC} = 3.0 V | 2.6 | - | - | V | | |
| | | V _{OL} | LOW-level output voltage | Y output; V _I at X1 input = V _{IH} or V _{IL} | | | | |
| | | | | I _O = 20 μA; V _{CC} = 0.8 V to 3.6 V | - | - | 0.1 | V |
| I _O = 1.1 mA; V _{CC} = 1.1 V | - | | | - | 0.3 × V _{CC} | V | | |
| I _O = 1.7 mA; V _{CC} = 1.4 V | - | | | - | 0.31 | V | | |
| I _O = 1.9 mA; V _{CC} = 1.65 V | - | | | - | 0.31 | V | | |
| I _O = 2.3 mA; V _{CC} = 2.3 V | - | | | - | 0.31 | V | | |
| I _O = 3.1 mA; V _{CC} = 2.3 V | - | | | - | 0.44 | V | | |
| I _O = 2.7 mA; V _{CC} = 3.0 V | - | | | - | 0.31 | V | | |
| I _O = 4.0 mA; V _{CC} = 3.0 V | - | | | - | 0.44 | V | | |
| X2 output; V _I = GND or V _{CC} | | | | | | | | |
| I _O = 20 μA; V _{CC} = 0.8 V to 3.6 V | - | | | - | 0.1 | V | | |
| I _O = 1.1 mA; V _{CC} = 1.1 V | - | | | - | 0.3 × V _{CC} | V | | |
| I _O = 1.7 mA; V _{CC} = 1.4 V | - | | | - | 0.31 | V | | |
| I _O = 1.9 mA; V _{CC} = 1.65 V | - | | | - | 0.31 | V | | |
| I _O = 2.3 mA; V _{CC} = 2.3 V | - | | | - | 0.31 | V | | |
| I _O = 3.1 mA; V _{CC} = 2.3 V | - | | | - | 0.44 | V | | |
| I _O = 2.7 mA; V _{CC} = 3.0 V | - | | | - | 0.31 | V | | |
| I _O = 4.0 mA; V _{CC} = 3.0 V | - | | | - | 0.44 | V | | |

Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|--------------------------------------|---|----------------------|------|-----------|---------------|
| I_I | input leakage current | X1 input | | | | |
| | | $V_I = \overline{EN} = V_{CC}; V_{CC} = 0 \text{ V to } 3.6 \text{ V}$ | - | - | ± 0.1 | μA |
| | | \overline{EN} input | | | | |
| | | $V_I = \text{GND to } 3.6 \text{ V}; V_{CC} = 0 \text{ V to } 3.6 \text{ V}$ | - | - | ± 0.1 | μA |
| I_{pu} | pull-up current | X1 input; $\overline{EN} = V_{CC}$ | | | | |
| | | $V_I = \text{GND}; V_{CC} = 0.8 \text{ V to } 3.6 \text{ V}$ | - | - | 15 | μA |
| I_{OFF} | power-off leakage current | V_I or $V_O = 0 \text{ V to } 3.6 \text{ V}; V_{CC} = 0 \text{ V}$ [1] | - | - | ± 0.2 | μA |
| ΔI_{OFF} | additional power-off leakage current | V_I or $V_O = 0 \text{ V to } 3.6 \text{ V}; V_{CC} = 0 \text{ V to } 0.2 \text{ V}$ [1] | - | - | ± 0.2 | μA |
| I_{CC} | supply current | $V_I = \text{GND or } V_{CC}; I_O = 0 \text{ A}; \overline{EN} = \text{GND}; V_{CC} = 0.8 \text{ V to } 3.6 \text{ V}$ | - | - | 75 | μA |
| ΔI_{CC} | additional supply current | \overline{EN} input | | | | |
| | | $V_I = V_{CC} - 0.6 \text{ V}; I_O = 0 \text{ A}; V_{CC} = 3.3 \text{ V}$ | - | - | 40 | μA |
| C_I | input capacitance | X1 input | | | | |
| | | $V_{CC} = 0 \text{ V to } 3.6 \text{ V}; V_I = \text{GND or } V_{CC}$ | - | 1.3 | - | pF |
| | | \overline{EN} input | | | | |
| | | $V_{CC} = 0 \text{ V to } 3.6 \text{ V}; V_I = \text{GND or } V_{CC}$ | - | 0.8 | - | pF |
| C_O | output capacitance | X2 output | | | | |
| | | $V_O = \text{GND}; V_{CC} = 0 \text{ V}$ | - | 1.5 | - | pF |
| | | Y output | | | | |
| | | $V_O = \text{GND}; V_{CC} = 0 \text{ V}$ | - | 1.7 | - | pF |
| g_{fs} | forward transconductance | see Fig. 7 and Fig. 8 | | | | |
| | | $V_{CC} = 0.8 \text{ V}$ | - | - | - | mA/V |
| | | $V_{CC} = 1.1 \text{ V to } 1.3 \text{ V}$ | 0.2 | - | 9.9 | mA/V |
| | | $V_{CC} = 1.4 \text{ V to } 1.6 \text{ V}$ | 3.9 | - | 17.7 | mA/V |
| | | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$ | 7.9 | - | 24.3 | mA/V |
| | | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$ | 18 | - | 30.7 | mA/V |
| | | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$ | 20.5 | - | 32.4 | mA/V |
| R_{bias} | bias resistance | $\overline{EN} = \text{GND}; f_i = 0 \text{ Hz}; V_I = 0 \text{ V or } V_{CC};$ see Fig. 2; for frequency behavior see Fig. 3 | 1.08 | 1.62 | 3.08 | M Ω |
| $T_{amb} = -40 \text{ }^\circ\text{C to } +85 \text{ }^\circ\text{C}$ | | | | | | |
| V_{IH} | HIGH-level input voltage | X1 input | | | | |
| | | $V_{CC} = 0.8 \text{ V to } 3.6 \text{ V}$ | $0.75 \times V_{CC}$ | - | - | V |
| | | \overline{EN} input | | | | |
| | | $V_{CC} = 0.8 \text{ V}$ | $0.70 \times V_{CC}$ | - | - | V |
| | | $V_{CC} = 0.9 \text{ V to } 1.95 \text{ V}$ | $0.65 \times V_{CC}$ | - | - | V |
| | | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$ | 1.6 | - | - | V |
| | | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$ | 2.0 | - | - | V |

Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit | | |
|--|---------------------------|---|--------------------------|---|------------------------|------|-----|---|
| V _{IL} | LOW-level input voltage | X1 input | | | | | | |
| | | V _{CC} = 0.8 V to 3.6 V | - | - | 0.25 × V _{CC} | V | | |
| | | EN input | | | | | | |
| | | V _{CC} = 0.8 V | - | - | 0.30 × V _{CC} | V | | |
| | | V _{CC} = 0.9 V to 1.95 V | - | - | 0.35 × V _{CC} | V | | |
| | | V _{CC} = 2.3 V to 2.7 V | - | - | 0.7 | V | | |
| | | V _{CC} = 3.0 V to 3.6 V | - | - | 0.9 | V | | |
| V _{OH} | HIGH-level output voltage | Y output; V _I at X1 input = V _{IH} or V _{IL} | | | | | | |
| | | I _O = -20 μA; V _{CC} = 0.8 V to 3.6 V | V _{CC} - 0.1 | - | - | V | | |
| | | I _O = -1.1 mA; V _{CC} = 1.1 V | 0.7 × V _{CC} | - | - | V | | |
| | | I _O = -1.7 mA; V _{CC} = 1.4 V | 1.03 | - | - | V | | |
| | | I _O = -1.9 mA; V _{CC} = 1.65 V | 1.30 | - | - | V | | |
| | | I _O = -2.3 mA; V _{CC} = 2.3 V | 1.97 | - | - | V | | |
| | | I _O = -3.1 mA; V _{CC} = 2.3 V | 1.85 | - | - | V | | |
| | | I _O = -2.7 mA; V _{CC} = 3.0 V | 2.67 | - | - | V | | |
| | | I _O = -4.0 mA; V _{CC} = 3.0 V | 2.55 | - | - | V | | |
| | | V _I at X1 input = V _{IH} or V _{IL} | | | | | | |
| | | I _O = -20 μA; V _{CC} = 0.8 V to 3.6 V | V _{CC} - 0.1 | - | - | V | | |
| | | I _O = -1.1 mA; V _{CC} = 1.1 V | 0.7 × V _{CC} | - | - | V | | |
| | | I _O = -1.7 mA; V _{CC} = 1.4 V | 1.03 | - | - | V | | |
| | | I _O = -1.9 mA; V _{CC} = 1.65 V | 1.30 | - | - | V | | |
| | | I _O = -2.3 mA; V _{CC} = 2.3 V | 1.97 | - | - | V | | |
| | | I _O = -3.1 mA; V _{CC} = 2.3 V | 1.85 | - | - | V | | |
| | | I _O = -2.7 mA; V _{CC} = 3.0 V | 2.67 | - | - | V | | |
| | | I _O = -4.0 mA; V _{CC} = 3.0 V | 2.55 | - | - | V | | |
| | | V _{OL} | LOW-level output voltage | Y output; V _I at X1 input = V _{IH} or V _{IL} | | | | |
| | | | | I _O = 20 μA; V _{CC} = 0.8 V to 3.6 V | - | - | 0.1 | V |
| I _O = 1.1 mA; V _{CC} = 1.1 V | - | | | - | 0.3 × V _{CC} | V | | |
| I _O = 1.7 mA; V _{CC} = 1.4 V | - | | | - | 0.37 | V | | |
| I _O = 1.9 mA; V _{CC} = 1.65 V | - | | | - | 0.35 | V | | |
| I _O = 2.3 mA; V _{CC} = 2.3 V | - | | | - | 0.33 | V | | |
| I _O = 3.1 mA; V _{CC} = 2.3 V | - | | | - | 0.45 | V | | |
| I _O = 2.7 mA; V _{CC} = 3.0 V | - | | | - | 0.33 | V | | |
| I _O = 4.0 mA; V _{CC} = 3.0 V | - | | | - | 0.45 | V | | |
| X2 output; V _I = GND or V _{CC} | | | | | | | | |
| I _O = 20 μA; V _{CC} = 0.8 V to 3.6 V | - | | | - | 0.1 | V | | |
| I _O = 1.1 mA; V _{CC} = 1.1 V | - | | | - | 0.3 × V _{CC} | V | | |
| I _O = 1.7 mA; V _{CC} = 1.4 V | - | | | - | 0.37 | V | | |
| I _O = 1.9 mA; V _{CC} = 1.65 V | - | | | - | 0.35 | V | | |
| I _O = 2.3 mA; V _{CC} = 2.3 V | - | | | - | 0.33 | V | | |
| I _O = 3.1 mA; V _{CC} = 2.3 V | - | | | - | 0.45 | V | | |
| I _O = 2.7 mA; V _{CC} = 3.0 V | - | | | - | 0.33 | V | | |
| I _O = 4.0 mA; V _{CC} = 3.0 V | - | | | - | 0.45 | V | | |

Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--|--------------------------------------|--|------------------------|-----|------------------------|------|
| I _I | input leakage current | X1 input | | | | |
| | | V _I = $\overline{\text{EN}}$ = V _{CC} ; V _{CC} = 0 V to 3.6 V | - | - | ±0.5 | µA |
| | | $\overline{\text{EN}}$ input | | | | |
| | | V _I = GND to 3.6 V; V _{CC} = 0 V to 3.6 V | - | - | ±0.5 | µA |
| I _{pu} | pull-up current | X1 input; $\overline{\text{EN}}$ = V _{CC} | | | | |
| | | V _I = GND; V _{CC} = 0.8 V to 3.6 V | - | - | 15 | µA |
| I _{OFF} | power-off leakage current | V _I or V _O = 0 V to 3.6 V; V _{CC} = 0 V [1] | - | - | ±0.5 | µA |
| ΔI _{OFF} | additional power-off leakage current | V _I or V _O = 0 V to 3.6 V; V _{CC} = 0 V to 0.2 V [1] | - | - | ±0.6 | µA |
| I _{CC} | supply current | V _I = GND or V _{CC} ; I _O = 0 A; $\overline{\text{EN}}$ = GND; V _{CC} = 0.8 V to 3.6 V | - | - | 75 | µA |
| ΔI _{CC} | additional supply current | $\overline{\text{EN}}$ input | | | | |
| | | V _I = V _{CC} - 0.6 V; I _O = 0 A; V _{CC} = 3.3 V | - | - | 50 | µA |
| g _{fs} | forward transconductance | see Fig. 7 and Fig. 8 | | | | |
| | | V _{CC} = 0.8 V | - | - | - | mA/V |
| | | V _{CC} = 1.1 V to 1.3 V | - | - | 10.8 | mA/V |
| | | V _{CC} = 1.4 V to 1.6 V | 1.8 | - | 21.2 | mA/V |
| | | V _{CC} = 1.65 V to 1.95 V | 7.5 | - | 29.9 | mA/V |
| | | V _{CC} = 2.3 V to 2.7 V | 15.0 | - | 38.0 | mA/V |
| | | V _{CC} = 3.0 V to 3.6 V | 17.8 | - | 39.2 | mA/V |
| R _{bias} | bias resistance | $\overline{\text{EN}}$ = GND; f _i = 0 Hz; V _I = 0 V or V _{CC} ; see Fig. 2; for frequency behavior see Fig. 3 | 1.07 | - | 3.11 | MΩ |
| T_{amb} = -40 °C to +125 °C | | | | | | |
| V _{IH} | HIGH-level input voltage | X1 input | | | | |
| | | V _{CC} = 0.8 V to 3.6 V | 0.75 × V _{CC} | - | - | V |
| | | $\overline{\text{EN}}$ input | | | | |
| | | V _{CC} = 0.8 V | 0.75 × V _{CC} | - | - | V |
| | | V _{CC} = 0.9 V to 1.95 V | 0.70 × V _{CC} | - | - | V |
| | | V _{CC} = 2.3 V to 2.7 V | 1.6 | - | - | V |
| V _{IL} | LOW-level input voltage | X1 input | | | | |
| | | V _{CC} = 0.8 V to 3.6 V | - | - | 0.25 × V _{CC} | V |
| | | $\overline{\text{EN}}$ input | | | | |
| | | V _{CC} = 0.8 V | - | - | 0.25 × V _{CC} | V |
| | | V _{CC} = 0.9 V to 1.95 V | - | - | 0.30 × V _{CC} | V |
| | | V _{CC} = 2.3 V to 2.7 V | - | - | 0.7 | V |
| | | V _{CC} = 3.0 V to 3.6 V | - | - | 0.9 | V |


Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit | | |
|--|---------------------------|---|--------------------------|---|------------------------|------|------|---|
| V _{OH} | HIGH-level output voltage | Y output; V _I at X1 input = V _{IH} or V _{IL} | | | | V | | |
| | | I _O = -20 μA; V _{CC} = 0.8 V to 3.6 V | V _{CC} - 0.11 | - | - | V | | |
| | | I _O = -1.1 mA; V _{CC} = 1.1 V | 0.6 × V _{CC} | - | - | V | | |
| | | I _O = -1.7 mA; V _{CC} = 1.4 V | 0.93 | - | - | V | | |
| | | I _O = -1.9 mA; V _{CC} = 1.65 V | 1.17 | - | - | V | | |
| | | I _O = -2.3 mA; V _{CC} = 2.3 V | 1.77 | - | - | V | | |
| | | I _O = -3.1 mA; V _{CC} = 2.3 V | 1.67 | - | - | V | | |
| | | I _O = -2.7 mA; V _{CC} = 3.0 V | 2.40 | - | - | V | | |
| | | I _O = -4.0 mA; V _{CC} = 3.0 V | 2.30 | - | - | V | | |
| | | X2 output; V _I = GND or V _{CC} | | | | V | | |
| | | I _O = -20 μA; V _{CC} = 0.8 V to 3.6 V | V _{CC} - 0.11 | - | - | V | | |
| | | I _O = -1.1 mA; V _{CC} = 1.1 V | 0.6 × V _{CC} | - | - | V | | |
| | | I _O = -1.7 mA; V _{CC} = 1.4 V | 0.93 | - | - | V | | |
| | | I _O = -1.9 mA; V _{CC} = 1.65 V | 1.17 | - | - | V | | |
| | | I _O = -2.3 mA; V _{CC} = 2.3 V | 1.77 | - | - | V | | |
| | | I _O = -3.1 mA; V _{CC} = 2.3 V | 1.67 | - | - | V | | |
| | | I _O = -2.7 mA; V _{CC} = 3.0 V | 2.40 | - | - | V | | |
| | | I _O = -4.0 mA; V _{CC} = 3.0 V | 2.30 | - | - | V | | |
| | | V _{OL} | LOW-level output voltage | Y output; V _I at X1 input = V _{IH} or V _{IL} | | | | |
| | | | | I _O = 20 μA; V _{CC} = 0.8 V to 3.6 V | - | - | 0.11 | V |
| I _O = 1.1 mA; V _{CC} = 1.1 V | - | | | - | 0.33 × V _{CC} | V | | |
| I _O = 1.7 mA; V _{CC} = 1.4 V | - | | | - | 0.41 | V | | |
| I _O = 1.9 mA; V _{CC} = 1.65 V | - | | | - | 0.39 | V | | |
| I _O = 2.3 mA; V _{CC} = 2.3 V | - | | | - | 0.36 | V | | |
| I _O = 3.1 mA; V _{CC} = 2.3 V | - | | | - | 0.50 | V | | |
| I _O = 2.7 mA; V _{CC} = 3.0 V | - | | | - | 0.36 | V | | |
| I _O = 4.0 mA; V _{CC} = 3.0 V | - | | | - | 0.50 | V | | |
| X2 output; V _I = GND or V _{CC} | | | | | | | | |
| I _O = 20 μA; V _{CC} = 0.8 V to 3.6 V | - | | | - | 0.11 | V | | |
| I _O = 1.1 mA; V _{CC} = 1.1 V | - | | | - | 0.33 × V _{CC} | V | | |
| I _O = 1.7 mA; V _{CC} = 1.4 V | - | | | - | 0.41 | V | | |
| I _O = 1.9 mA; V _{CC} = 1.65 V | - | | | - | 0.39 | V | | |
| I _O = 2.3 mA; V _{CC} = 2.3 V | - | | | - | 0.36 | V | | |
| I _O = 3.1 mA; V _{CC} = 2.3 V | - | | | - | 0.50 | V | | |
| I _O = 2.7 mA; V _{CC} = 3.0 V | - | | | - | 0.36 | V | | |
| I _O = 4.0 mA; V _{CC} = 3.0 V | - | | | - | 0.50 | V | | |

Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------|--------------------------------------|--|------|-----|-------|------|
| I _I | input leakage current | X1 input V _I = $\overline{\text{EN}}$ = V _{CC} ; V _{CC} = 0 V to 3.6 V | - | - | ±0.75 | μA |
| | | $\overline{\text{EN}}$ input V _I = GND to 3.6 V; V _{CC} = 0 V to 3.6 V | - | - | ±0.75 | μA |
| I _{pu} | pull-up current | X1 input; $\overline{\text{EN}}$ = V _{CC} V _I = GND; V _{CC} = 0.8 V to 3.6 V | - | - | 15 | μA |
| I _{OFF} | power-off leakage current | V _I or V _O = 0 V to 3.6 V; V _{CC} = 0 V [1] | - | - | ±0.75 | μA |
| ΔI _{OFF} | additional power-off leakage current | V _I or V _O = 0 V to 3.6 V; V _{CC} = 0 V to 0.2 V [1] | - | - | ±0.75 | μA |
| I _{CC} | supply current | V _I = GND or V _{CC} ; I _O = 0 A; $\overline{\text{EN}}$ = GND; V _{CC} = 0.8 V to 3.6 V | - | - | 75 | μA |
| ΔI _{CC} | additional supply current | $\overline{\text{EN}}$ input | - | - | - | - |
| | | V _I = V _{CC} - 0.6 V; I _O = 0 A; V _{CC} = 3.3 V | - | - | 75 | μA |
| g _{fs} | forward transconductance | see Fig. 7 and Fig. 8 | - | - | - | - |
| | | V _{CC} = 0.8 V | - | - | - | mA/V |
| | | V _{CC} = 1.1 V to 1.3 V | - | - | 10.8 | mA/V |
| | | V _{CC} = 1.4 V to 1.6 V | 1.8 | - | 21.2 | mA/V |
| | | V _{CC} = 1.65 V to 1.95 V | 6.9 | - | 29.9 | mA/V |
| | | V _{CC} = 2.3 V to 2.7 V | 13.4 | - | 38.0 | mA/V |
| | | V _{CC} = 3.0 V to 3.6 V | 15.8 | - | 39.2 | mA/V |
| R _{bias} | bias resistance | $\overline{\text{EN}}$ = GND; f _i = 0 Hz; V _I = 0 V or V _{CC} ; see Fig. 2; for frequency behavior see Fig. 3 | 1.07 | - | 3.11 | MΩ |

[1] Only for output Y and input $\overline{\text{EN}}$.

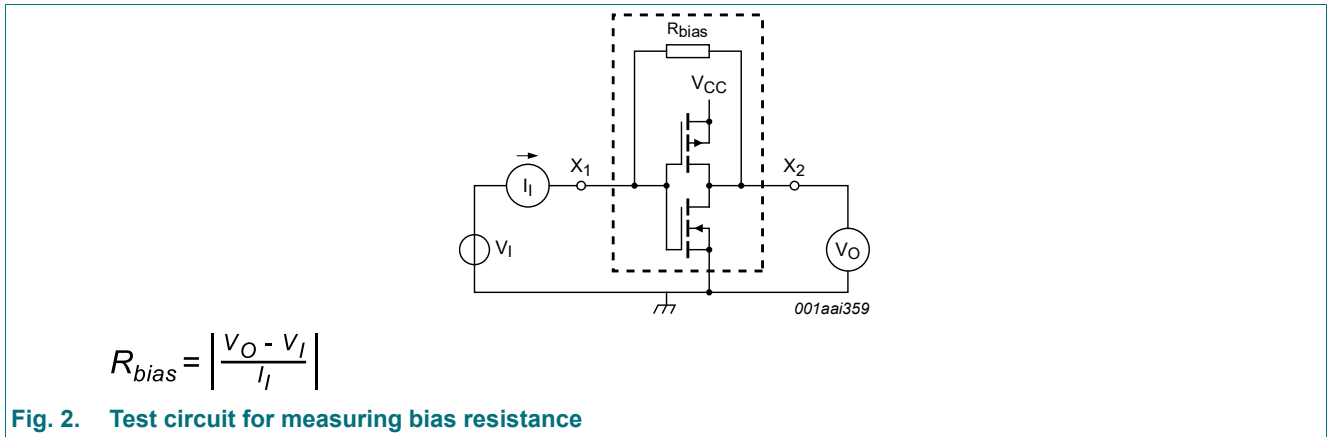

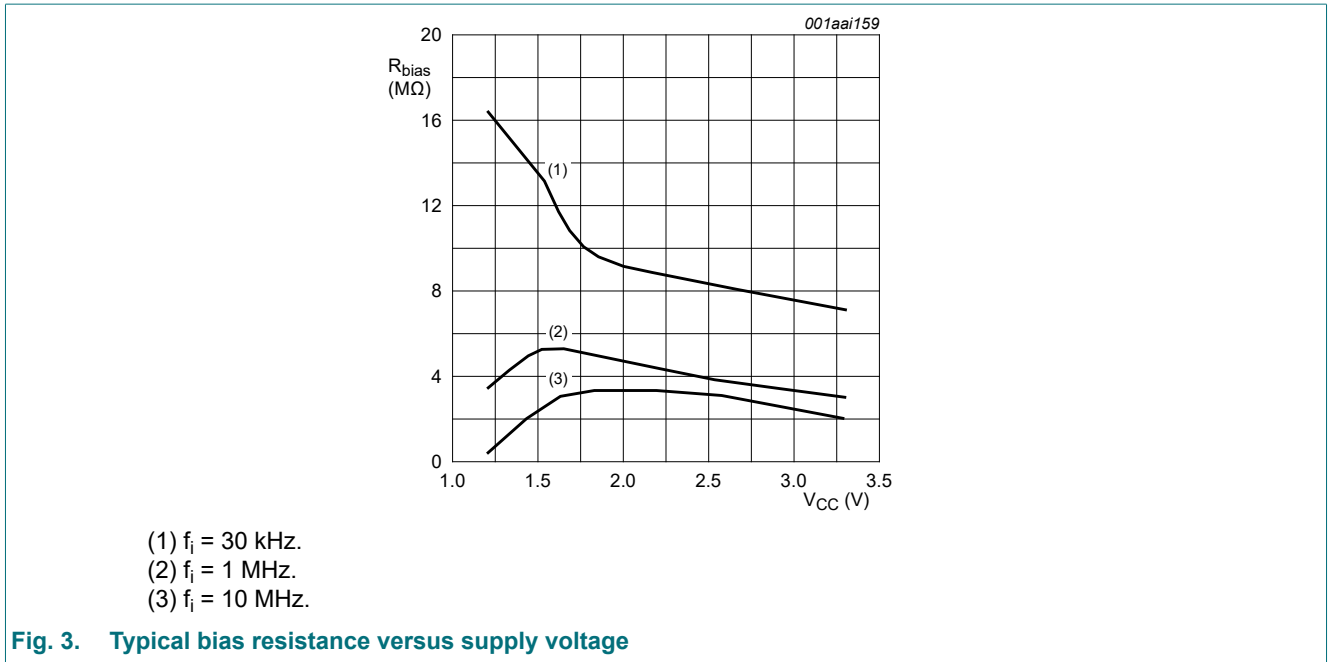


Fig. 3. Typical bias resistance versus supply voltage

11. Dynamic characteristics

Table 8. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 6.

| Symbol | Parameter | Conditions | $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ | | | $T_{\text{amb}} = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$ | | $T_{\text{amb}} = -40 \text{ }^\circ\text{C}$ to $+125 \text{ }^\circ\text{C}$ | | Unit |
|----------------------|-------------------|---|--|---------|------|---|------|--|------|------|
| | | | Min | Typ [1] | Max | Min | Max | Min | Max | |
| $C_L = 5 \text{ pF}$ | | | | | | | | | | |
| t_{pd} | propagation delay | X1 to X2; see Fig. 4 [2] | | | | | | | | |
| | | $V_{\text{CC}} = 0.8 \text{ V}$ | - | 12.8 | - | - | - | - | - | ns |
| | | $V_{\text{CC}} = 1.1 \text{ V to } 1.3 \text{ V}$ | 1.2 | 3.0 | 3.9 | 1.2 | 3.9 | 1.2 | 3.9 | ns |
| | | $V_{\text{CC}} = 1.4 \text{ V to } 1.6 \text{ V}$ | 1.0 | 2.2 | 2.6 | 1.0 | 2.7 | 1.0 | 2.7 | ns |
| | | $V_{\text{CC}} = 1.65 \text{ V to } 1.95 \text{ V}$ | 0.8 | 1.9 | 2.3 | 0.8 | 2.4 | 0.8 | 2.5 | ns |
| | | $V_{\text{CC}} = 2.3 \text{ V to } 2.7 \text{ V}$ | 0.7 | 1.6 | 1.9 | 0.7 | 2.0 | 0.7 | 2.0 | ns |
| | | $V_{\text{CC}} = 3.0 \text{ V to } 3.6 \text{ V}$ | 0.7 | 1.4 | 1.6 | 0.7 | 1.7 | 0.7 | 1.7 | ns |
| | | X1 to Y; see Fig. 5 [2] | | | | | | | | |
| | | $V_{\text{CC}} = 0.8 \text{ V}$ | - | 39.2 | - | - | - | - | - | ns |
| | | $V_{\text{CC}} = 1.1 \text{ V to } 1.3 \text{ V}$ | 2.5 | 8.0 | 10.7 | 2.3 | 10.8 | 2.3 | 10.9 | ns |
| | | $V_{\text{CC}} = 1.4 \text{ V to } 1.6 \text{ V}$ | 2.2 | 5.5 | 6.6 | 2.0 | 7.0 | 2.0 | 7.0 | ns |
| | | $V_{\text{CC}} = 1.65 \text{ V to } 1.95 \text{ V}$ | 1.8 | 4.4 | 5.5 | 1.7 | 5.9 | 1.7 | 6.0 | ns |
| | | $V_{\text{CC}} = 2.3 \text{ V to } 2.7 \text{ V}$ | 1.5 | 3.5 | 4.1 | 1.4 | 4.4 | 1.4 | 4.5 | ns |
| | | $V_{\text{CC}} = 3.0 \text{ V to } 3.6 \text{ V}$ | 1.5 | 3.1 | 3.5 | 1.4 | 3.8 | 1.4 | 3.8 | ns |

Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | T _{amb} = 25 °C | | | T _{amb} = -40 °C to +85 °C | | T _{amb} = -40 °C to +125 °C | | Unit |
|------------------------------|-------------------|------------------------------------|--------------------------|---------|------|-------------------------------------|------|--------------------------------------|------|------|
| | | | Min | Typ [1] | Max | Min | Max | Min | Max | |
| C_L = 10 pF | | | | | | | | | | |
| t _{pd} | propagation delay | X1 to X2; see Fig. 4 [2] | | | | | | | | |
| | | V _{CC} = 0.8 V | - | 20.9 | - | - | - | - | - | ns |
| | | V _{CC} = 1.1 V to 1.3 V | 1.4 | 4.1 | 5.4 | 1.3 | 5.6 | 1.3 | 5.6 | ns |
| | | V _{CC} = 1.4 V to 1.6 V | 1.3 | 2.9 | 3.6 | 1.2 | 3.8 | 1.2 | 3.8 | ns |
| | | V _{CC} = 1.65 V to 1.95 V | 1.2 | 2.5 | 3.0 | 1.1 | 3.2 | 1.1 | 3.2 | ns |
| | | V _{CC} = 2.3 V to 2.7 V | 0.9 | 2.0 | 2.4 | 0.8 | 2.5 | 0.8 | 2.5 | ns |
| | | V _{CC} = 3.0 V to 3.6 V | 0.9 | 1.8 | 2.1 | 0.8 | 2.3 | 0.8 | 2.3 | ns |
| | | X1 to Y; see Fig. 5 [2] | | | | | | | | |
| | | V _{CC} = 0.8 V | - | 46.6 | - | - | - | - | - | ns |
| | | V _{CC} = 1.1 V to 1.3 V | 2.7 | 9.2 | 12.4 | 2.5 | 12.7 | 2.5 | 12.7 | ns |
| | | V _{CC} = 1.4 V to 1.6 V | 2.5 | 6.3 | 7.8 | 2.2 | 8.2 | 2.2 | 8.2 | ns |
| | | V _{CC} = 1.65 V to 1.95 V | 2.3 | 5.0 | 6.2 | 2.2 | 6.7 | 2.2 | 6.7 | ns |
| | | V _{CC} = 2.3 V to 2.7 V | 1.8 | 4.0 | 4.7 | 1.7 | 5.0 | 1.7 | 5.1 | ns |
| | | V _{CC} = 3.0 V to 3.6 V | 1.9 | 3.6 | 4.2 | 1.8 | 4.5 | 1.8 | 4.5 | ns |
| C_L = 15 pF | | | | | | | | | | |
| t _{pd} | propagation delay | X1 to X2; see Fig. 4 [2] | | | | | | | | |
| | | V _{CC} = 0.8 V | - | 28.9 | - | - | - | - | - | ns |
| | | V _{CC} = 1.1 V to 1.3 V | 1.7 | 5.2 | 7.1 | 1.6 | 7.2 | 1.6 | 7.3 | ns |
| | | V _{CC} = 1.4 V to 1.6 V | 1.6 | 3.6 | 4.4 | 1.6 | 4.7 | 1.6 | 4.8 | ns |
| | | V _{CC} = 1.65 V to 1.95 V | 1.3 | 3.0 | 3.7 | 1.3 | 3.9 | 1.3 | 4.0 | ns |
| | | V _{CC} = 2.3 V to 2.7 V | 1.0 | 2.4 | 2.9 | 1.0 | 3.1 | 1.0 | 3.1 | ns |
| | | V _{CC} = 3.0 V to 3.6 V | 1.1 | 2.2 | 2.5 | 1.0 | 2.7 | 1.0 | 2.7 | ns |
| | | X1 to Y; see Fig. 5 [2] | | | | | | | | |
| | | V _{CC} = 0.8 V | - | 53.9 | - | - | - | - | - | ns |
| | | V _{CC} = 1.1 V to 1.3 V | 3.1 | 10.4 | 14.2 | 2.8 | 14.6 | 2.8 | 14.7 | ns |
| | | V _{CC} = 1.4 V to 1.6 V | 2.9 | 7.0 | 8.5 | 2.7 | 9.2 | 2.7 | 9.3 | ns |
| | | V _{CC} = 1.65 V to 1.95 V | 2.5 | 5.6 | 6.9 | 2.3 | 7.4 | 2.3 | 7.5 | ns |
| | | V _{CC} = 2.3 V to 2.7 V | 2.1 | 4.5 | 5.4 | 2.0 | 5.7 | 2.0 | 5.7 | ns |
| | | V _{CC} = 3.0 V to 3.6 V | 2.3 | 4.1 | 4.7 | 2.1 | 5.1 | 2.1 | 5.1 | ns |

Low-power X-tal driver with enable and internal resistor

| Symbol | Parameter | Conditions | T _{amb} = 25 °C | | | T _{amb} = -40 °C to +85 °C | | T _{amb} = -40 °C to +125 °C | | Unit |
|---|-------------------------------|---|--------------------------|---------|------|-------------------------------------|------|--------------------------------------|------|------|
| | | | Min | Typ [1] | Max | Min | Max | Min | Max | |
| C_L = 30 pF | | | | | | | | | | |
| t _{pd} | propagation delay | X1 to X2; see Fig. 4 [2] | | | | | | | | |
| | | V _{CC} = 0.8 V | - | 52.8 | - | - | - | - | - | ns |
| | | V _{CC} = 1.1 V to 1.3 V | 2.4 | 8.5 | 11.8 | 2.3 | 12.2 | 2.3 | 12.4 | ns |
| | | V _{CC} = 1.4 V to 1.6 V | 2.2 | 5.6 | 6.8 | 2.0 | 7.5 | 2.0 | 7.6 | ns |
| | | V _{CC} = 1.65 V to 1.95 V | 2.0 | 4.5 | 5.6 | 1.9 | 6.2 | 1.9 | 6.2 | ns |
| | | V _{CC} = 2.3 V to 2.7 V | 1.5 | 3.7 | 4.2 | 1.4 | 4.6 | 1.4 | 4.6 | ns |
| | | V _{CC} = 3.0 V to 3.6 V | 1.7 | 3.3 | 3.7 | 1.6 | 4.0 | 1.6 | 4.2 | ns |
| | | X1 to Y; see Fig. 5 [2] | | | | | | | | |
| | | V _{CC} = 0.8 V | - | 77.6 | - | - | - | - | - | ns |
| | | V _{CC} = 1.1 V to 1.3 V | 3.7 | 13.8 | 19.2 | 3.3 | 19.8 | 3.3 | 20.1 | ns |
| | | V _{CC} = 1.4 V to 1.6 V | 3.4 | 9.2 | 11.2 | 3.1 | 12.2 | 3.1 | 12.3 | ns |
| | | V _{CC} = 1.65 V to 1.95 V | 3.4 | 7.4 | 8.8 | 3.1 | 9.7 | 3.1 | 9.7 | ns |
| | | V _{CC} = 2.3 V to 2.7 V | 2.6 | 5.9 | 6.7 | 2.4 | 7.4 | 2.4 | 7.4 | ns |
| V _{CC} = 3.0 V to 3.6 V | 3.2 | 5.4 | 6.2 | 2.9 | 6.7 | 2.9 | 6.9 | ns | | |
| C_L = 5 pF, 10 pF, 15 pF and 30 pF | | | | | | | | | | |
| C _{PD} | power dissipation capacitance | f _i = 1 MHz; EN = GND; V _I = GND to V _{CC} [3][4][5] | | | | | | | | |
| | | V _{CC} = 0.8 V | - | 6.8 | - | - | - | - | - | pF |
| | | V _{CC} = 1.1 V to 1.3 V | - | 12.0 | - | - | - | - | - | pF |
| | | V _{CC} = 1.4 V to 1.6 V | - | 18.2 | - | - | - | - | - | pF |
| | | V _{CC} = 1.65 V to 1.95 V | - | 19.2 | - | - | - | - | - | pF |
| | | V _{CC} = 2.3 V to 2.7 V | - | 21.9 | - | - | - | - | - | pF |
| | | V _{CC} = 3.0 V to 3.6 V | - | 24.9 | - | - | - | - | - | pF |

- [1] All typical values are measured at nominal V_{CC}.
- [2] t_{pd} is the same as t_{PLH} and t_{PHL}.
- [3] All specified values are the average typical values over all stated loads.
- [4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).
 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:
 f_i = input frequency in MHz;
 f_o = output frequency in MHz;
 C_L = output load capacitance in pF;
 V_{CC} = supply voltage in V;
 N = number of inputs switching;
 Σ(C_L × V_{CC}² × f_o) = sum of the outputs.
- [5] Feedback current is included in the C_{PD}.

11.1. Waveforms and test circuit



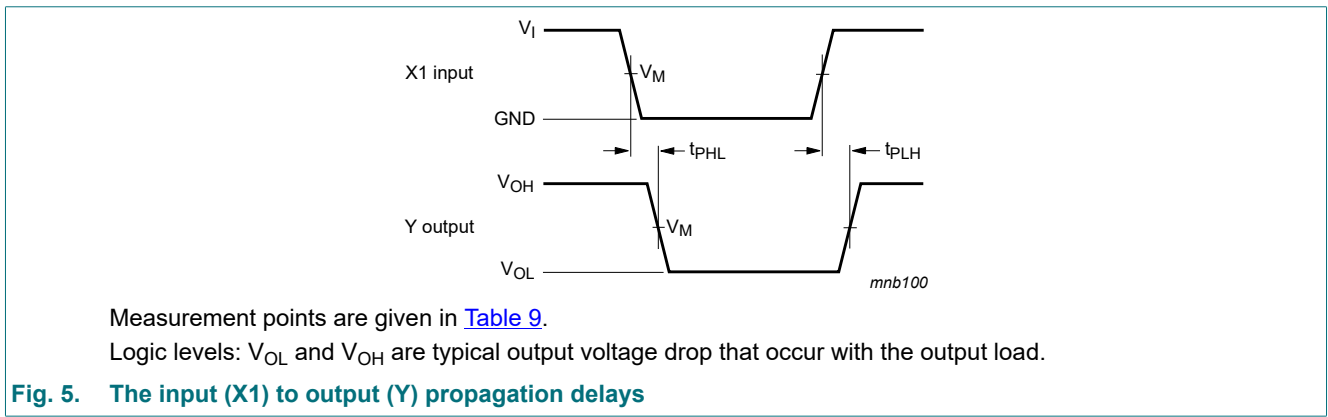


Table 9. Measurement points

| Supply voltage | Output | Input | | |
|----------------|---------------------|---------------------|----------|---------------|
| V_{CC} | V_M | V_M | V_I | $t_r = t_f$ |
| 0.8 V to 3.6 V | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | V_{CC} | ≤ 3.0 ns |

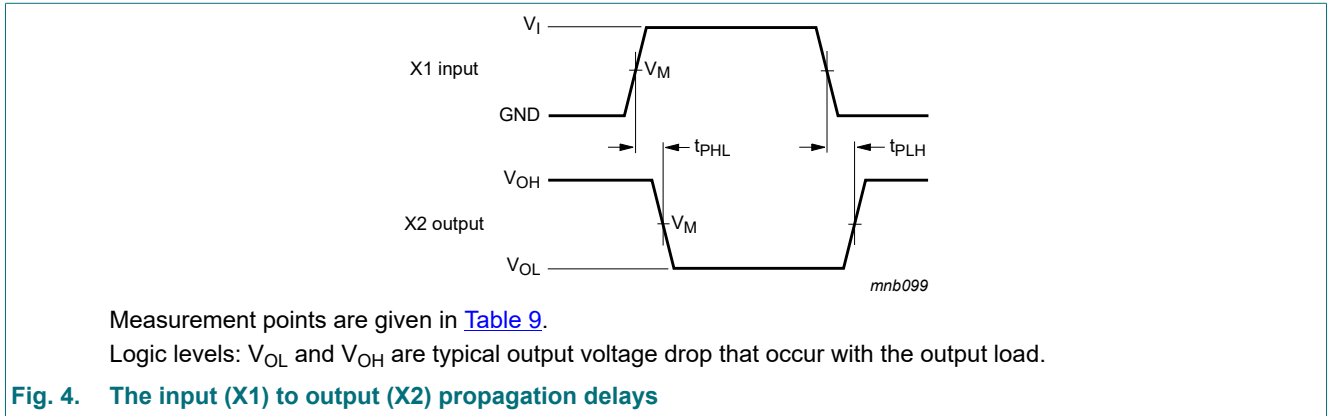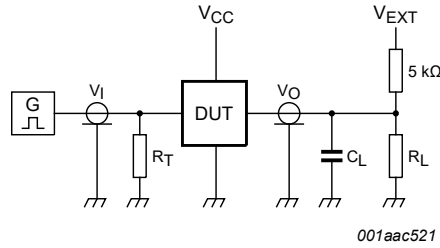

Test data is given in [Table 10](#).

Definitions for test circuit:

R_L = Load resistance;

C_L = Load capacitance including jig and probe capacitance;

R_T = Termination resistance should be equal to the output impedance Z_o of the pulse generator;

V_{EXT} = External voltage for measuring switching times.


Fig. 6. Test circuit for measuring switching times

Table 10. Test data

| Supply voltage | Load | | V_{EXT} |
|----------------|------------------------------|--------------|-----------------------|
| V_{CC} | C_L | R_L [1] | t_{PLH} , t_{PHL} |
| 0.8 V to 3.6 V | 5 pF, 10 pF, 15 pF and 30 pF | 5 kΩ or 1 MΩ | t_{PZH} , t_{PHZ} |
| | | | t_{PZL} , t_{PLZ} |
| | | | $2 \times V_{CC}$ |

[1] For measuring enable and disable times $R_L = 5 \text{ k}\Omega$.

For measuring propagation delays, setup and hold times and pulse width $R_L = 1 \text{ M}\Omega$.

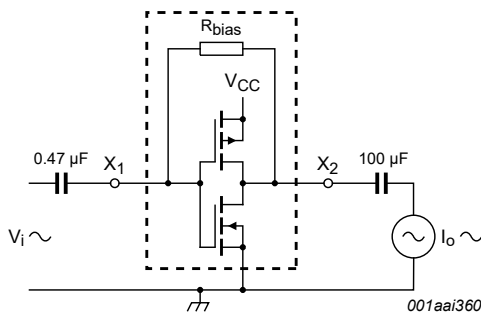


$$g_{fs} = \frac{\Delta I_O}{\Delta V_I}$$

$f_i = 1 \text{ kHz}$.

V_O is constant.

Fig. 7. Test set-up for measuring forward transconductance

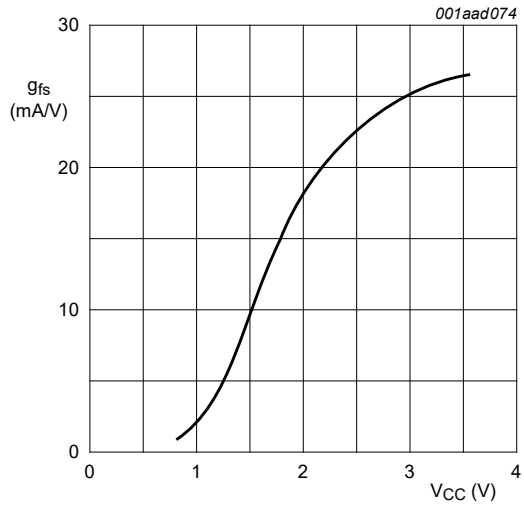

$T_{amb} = 25^\circ\text{C}$.

Fig. 8. Typical forward transconductance as a function of supply voltage

12. Application information

Crystal controlled oscillator circuits are widely used in clock pulse generators because of their excellent frequency stability and wide operating frequency range. The use of the 74AUP1Z04-Q100 provides the additional advantages of low power dissipation, stable operation over a wide range of frequency and temperature and a very small footprint. This application information describes crystal characteristics, design and testing of crystal oscillator circuits based on the 74AUP1Z04-Q100.

12.1. Crystal characteristics

Fig. 9 is the equivalent circuit of a quartz crystal.

The reactive and resistive component of the impedance of the crystal alone and the crystal with a series and a parallel capacitance is shown in Fig. 10.

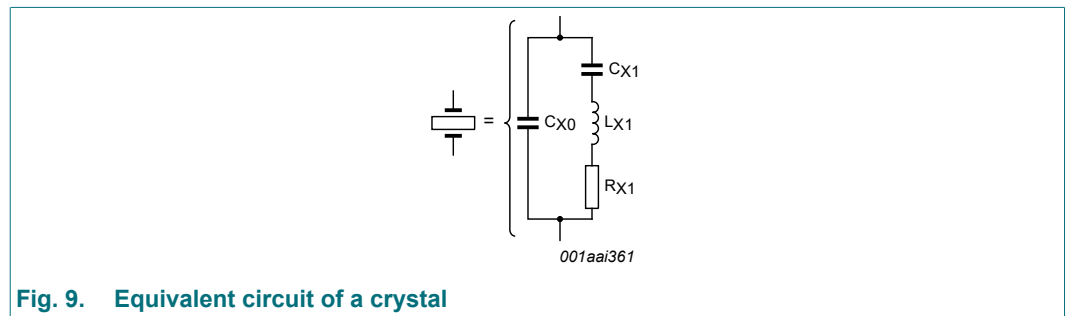


Fig. 9. Equivalent circuit of a crystal

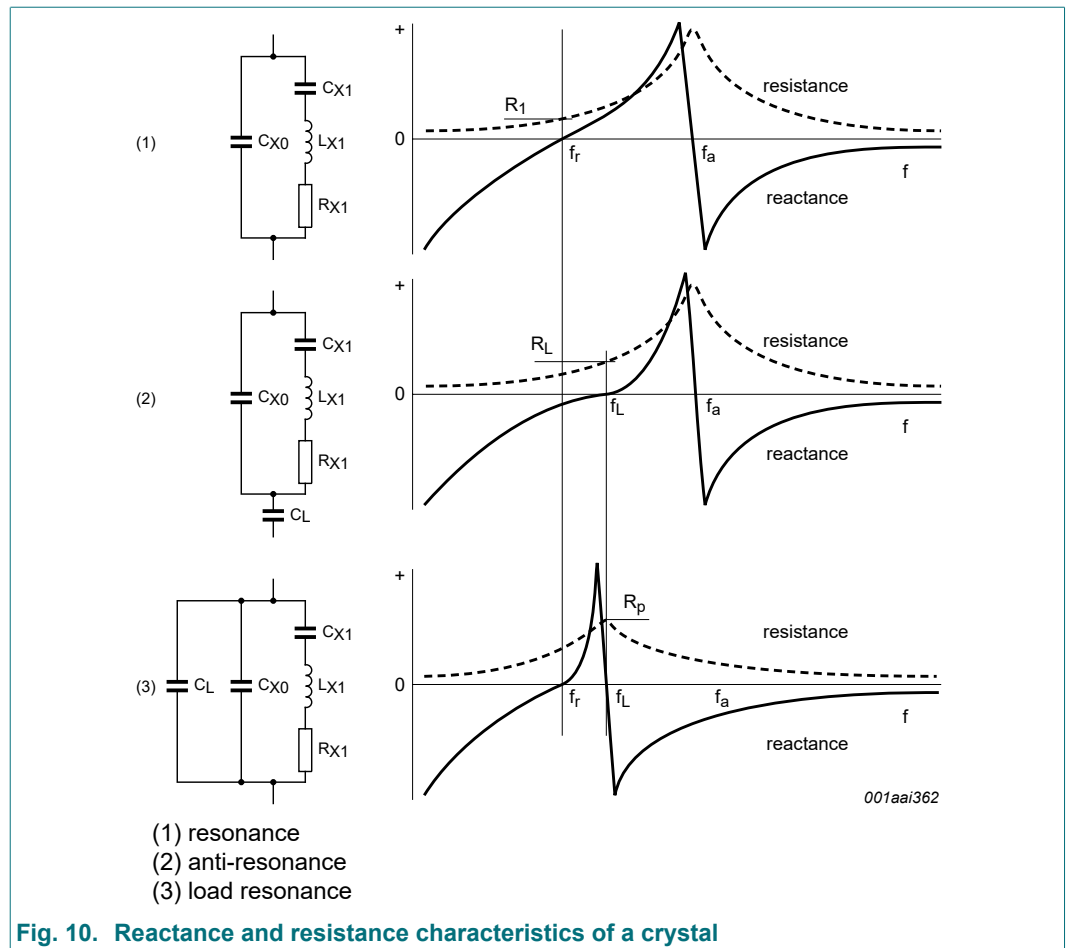


Fig. 10. Reactance and resistance characteristics of a crystal

12.1.1. Design

Fig. 11 shows the recommended way to connect a crystal to the 74AUP1Z04-Q100. This circuit is basically a Pierce oscillator circuit in which the crystal is operating at its fundamental frequency and is tuned by the parallel load capacitance of C_1 and C_2 . C_1 and C_2 are in series with the crystal. They should be approximately equal. R_1 is the drive-limiting resistor and is set to approximately the same value as the reactance of C_1 at the crystal frequency ($R_1 = X_{C1}$). This will result in an input to the crystal of 50 % of the rail-to-rail output of X2. This keeps the drive level into the crystal within drive specifications (the designer should verify this). Overdriving the crystal can cause damage.

The internal bias resistor provides negative feedback and sets a bias point of the inverter near mid-supply, operating the 74AUP1GU04-Q100 portion in the high gain linear region.

To calculate the values of C_1 and C_2 , the designer can use the formula:

$$C_L = \frac{C_1 \times C_2}{C_1 + C_2} + C_s$$

C_L is the load capacitance as specified by the crystal manufacturer, C_s is the stray capacitance of the circuit (for the 74AUP1Z04-Q100 this is equal to an input capacitance of 1.5 pF).

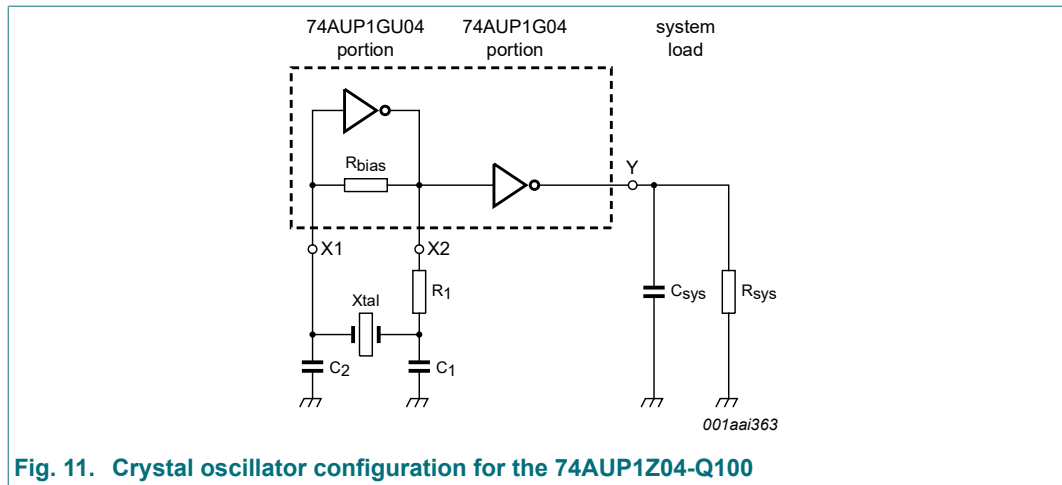


Fig. 11. Crystal oscillator configuration for the 74AUP1Z04-Q100

12.1.2. Testing

After the calculations are performed for a particular crystal, the oscillator circuit should be tested. The following simple checks will verify the prototype design of a crystal controlled oscillator circuit. Perform them after laying out the board:

- Test the oscillator over worst-case conditions (lowest supply voltage, worst-case crystal and highest operating temperature). Adding series and parallel resistors can simulate a worst-case crystal.
- Insure that the circuit does not oscillate without the crystal.
- Check the frequency stability over a supply range greater than that which is likely to occur during normal operation.
- Check that the start-up time is within system requirements.

As the 74AUP1Z04-Q100 isolates the system loading, once the design is optimized, the single layout may work in multiple applications for any given crystal.

13. Package outline

TSSOP6: plastic thin shrink small outline package; 6 leads; body width 1.25 mm

SOT363-2



Fig. 12. Package outline SOT363-2 (TSSOP6)

14. Abbreviations

Table 11. Abbreviations

| Acronym | Description |
|---------|-------------------------|
| CDM | Charged Device Model |
| DUT | Device Under Test |
| ESD | ElectroStatic Discharge |
| HBM | Human Body Model |

15. Revision history

Table 12. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes |
|--------------------|--|--------------------|---------------|--------------------|
| 74AUP1Z04_Q100 v.3 | 20230717 | Product data sheet | - | 74AUP1Z04_Q100 v.2 |
| Modifications: | <ul style="list-style-type: none"> Section 1 updated. Section 2: ESD specification updated according to the latest JEDEC standard. | | | |
| 74AUP1Z04_Q100 v.2 | 20220127 | Product data sheet | - | 74AUP1Z04_Q100 v.1 |
| Modifications | <ul style="list-style-type: none"> SOT363 (SC-88) package changed to SOT363-2 (TSSOP6) package. | | | |
| 74AUP1Z04_Q100 v.1 | 20200818 | Product data sheet | - | - |

16. Legal information

Data sheet status

| Document status [1][2] | Product status [3] | Definition |
|--------------------------------|--------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or

equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

| | |
|--|-----------|
| 1. General description | 1 |
| 2. Features and benefits | 1 |
| 3. Ordering information | 1 |
| 4. Marking | 2 |
| 5. Functional diagram | 2 |
| 6. Pinning information | 2 |
| 6.1. Pinning | 2 |
| 6.2. Pin description | 3 |
| 7. Functional description | 3 |
| 8. Limiting values | 3 |
| 9. Recommended operating conditions | 4 |
| 10. Static characteristics | 4 |
| 11. Dynamic characteristics | 11 |
| 11.1. Waveforms and test circuit | 14 |
| 12. Application information | 16 |
| 12.1. Crystal characteristics | 16 |
| 12.1.1. Design | 17 |
| 12.1.2. Testing | 17 |
| 13. Package outline | 18 |
| 14. Abbreviations | 19 |
| 15. Revision history | 19 |
| 16. Legal information | 20 |

© Nexperia B.V. 2023. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 17 July 2023