

**PHILIPS**

Data handbook



Electronic  
components  
and materials

Integrated circuits

Book IC02b 1988

Video and associated systems

Bipolar, MOS

Types TDA1534 to TSA 6057





**VIDEO AND ASSOCIATED SYSTEMS**  
**BIPOLAR, MOS**  
Types TDA1534 to TSA6057

	<i>page</i>
<b>Selection guide</b>	
Functional index .....	865
Numerical index (excluding microcontrollers) .....	875
Numerical index (microcontrollers) .....	883
Maintenance type list .....	887
<b>General</b>	
Type designation .....	891
Rating systems .....	893
Handling MOS devices .....	895
<b>Device data</b> .....	897
<b>Package information</b>	
Package outlines .....	1857
Soldering .....	1891



## SELECTION GUIDE

**Functional index**

**Numerical index (excluding microcontrollers)**

**Numerical index (microcontrollers)**

**Maintenance type list**





FUNCTIONAL INDEX

type number	description	page
<b>CAMERA ICs</b>		
SAA1043	universal sync generator	295
SAA1044	subcarrier coupler circuit	311
TDA4301	vertical driver	1555
TDA4301T	vertical driver	1559
TDA4302	pixel generator circuit	1563
TDA4303	white processing encoder	1569
TDA4304	DC control circuit	1579
TDA4305T	horizontal driver circuit	1585
TDA4306	master gain circuit	1591
<b>CLOCK/CALENDAR</b>		
PCF8573	clock/calendar; I <sup>2</sup> C bus	155
PCF8583	clock/calendar with 256 x 8-bit static RAM; I <sup>2</sup> C bus	241
<b>COLOUR DECODERS</b>		
SAA9050	digital multistandard decoder; I <sup>2</sup> C bus	605
TDA3501	video control combination	1241
TDA3505	PAL/SECAM video control with automatic cut-off control; -(B-Y) and -(R-Y) input	1249
TDA3506	PAL/SECAM video control with automatic cut-off control; +(B-Y) and +(R-Y) input	1249
TDA3507	PAL/SECAM video control with automatic cut-off control; -(B-Y) and -(R-Y) input	1259
TDA3510	PAL decoder	1271
TDA3560	PAL decoder	1275
TDA3561A	PAL decoder	1285
TDA3562A	PAL/NTSC decoder	1297
TDA3563	NTSC decoder	1313
TDA3564	NTSC decoder without RGB inputs	1323
TDA3565	PAL decoder	1333
TDA3566	PAL/NTSC decoder	1341
TDA3567	NTSC decoder	1359
TDA3569	NTSC decoder with fast RGB blanking	1371
TDA3590A	SECAM processor circuit (improved TDA3590)	1391
TDA3592A	SECAM/PAL transcoder	1407
TDA4510	PAL decoder	1653
TDA4532	SECAM decoder	1659
TDA4555	multistandard decoder for -(B-Y) and -(R-Y) signals	1665
TDA4556	multistandard decoder for +(B-Y) and +(R-Y) signals	1665
TDA4560	colour transient improvement circuit	1673
TDA4570	NTSC decoder	1679
TDA4580	video control combination circuit with automatic cut-off control	1685
TDA8442	I <sup>2</sup> C bus interface for colour decoders	1791
TDA8443; A	I <sup>2</sup> C bus-controlled YUV/RGB interface circuit	1799

# FUNCTIONAL INDEX

type number	description	page
<b>DATA CONVERSION; ADCs, DACs</b>		
PCF8591	8-bit ADC/DAC; I <sup>2</sup> C bus	259
PNA7509	7-bit ADC, 22 MHz, 3-state output	277
PNA7518	8-bit multiplying DAC; 30 MHz	289
SAD1009	universal DAC (UDAC)	711
SAD1010	automatic tracking oscillator and digital-to-analogue converter (ATO/DAC)	723
TDA1534	14-bit ADC	899
TDA1540P	14-bit DAC	907
TDA1541A	dual 16-bit DAC	913
TDA5702	8-bit DAC	1725
TDA5703	8-bit ADC	1731
TDA8444	octuple 6-bit DAC; I <sup>2</sup> C bus	1813
<b>DIGITAL PROCESSING</b>		
SAA9030	background memory controller	585
SAA9040	computer controlled teletext extension	595
SAA9050	digital multistandard decoder; I <sup>2</sup> C bus	605
SAA9057	clock generator circuit	637
SAA9058	sample-rate converter	643
<b>DISPLAY DRIVERS</b>		
PCF1303T	18-element bar graph LCD driver (with analogue input)	71
PCF2100	LCD duplex driver; 40 segments	77
PCF2110	LCD duplex driver; 60 segments and 2 LEDs	77
PCF2111	LCD duplex driver; 64 segments	77
PCF2112	LCD driver; 32 segments	77
PCF2201	LCD flat panel row/column driver	93
PCF8566	universal LCD driver for low multiplex rates (1:1 to 1:4) max. 96 elements; I <sup>2</sup> C bus	115
PCF8576	universal LCD driver for low multiplex rates (1:1 to 1:4) max. 160 segments; I <sup>2</sup> C bus	183
PCF8577	LCD direct (32 segments) or duplex (64 segments) driver; I <sup>2</sup> C bus	217
PCF8577A	LCD direct (32 segments) or duplex (64 segments) driver; I <sup>2</sup> C bus; different slave address	217
SAA1060	LED display/interface circuit	329
SAA1062A; AT	LCD display/interface circuit	335
SAA1063	fluorescent display/interface circuit	341
SAA1064	4-digit LED driver; I <sup>2</sup> C bus	347
<b>EAST-WEST CORRECTION</b>		
TDA1082	east-west correction driver circuit	811
<b>I<sup>2</sup>C BUS COMPATIBLE ICs</b>		
MAB84X1	single chip 8-bit $\mu$ C family	45
MAB8422/42	single chip 8-bit $\mu$ C family	47
MAF84X1	single chip 8-bit $\mu$ C family	45



type number	description	page
MAF8422/42	single chip 8-bit $\mu$ C family	47
MAF84AX1	single chip 8-bit $\mu$ C family	45
MAF84A22/42	single chip 8-bit $\mu$ C family	47
PCB83C552	single chip 8-bit $\mu$ C family	53
PCB83C652	single chip 8-bit $\mu$ C family	55
PCB83C654	single chip 8-bit $\mu$ C family	57
PCF84CXX	single chip 8-bit $\mu$ C family	67
PCF8566	universal LCD driver for low multiplex rates (1:1 to 1:4) max. 96 elements	115
PCF8570	256 x 8-bit static RAM	145
PCF8570C	256 x 8-bit static RAM	145
PCF8571	128 x 8-bit static RAM	145
PCF8573	clock/calendar	155
PCF8574	remote 8-bit I/O expander	171
PCF8574A	remote 8-bit I/O expander; different slave address	171
PCF8576	universal LCD driver for low multiplex rates (1:1 to 1:4) max. 160 segments	183
PCF8577	LCD direct (32 segments) or duplex (64 segments) driver	217
PCF8577A	LCD direct (32 segments) or duplex (64 segments) driver; different slave address	217
PCF8582	256 x 8-bit static EEPROM	233
PCF8583	clock calendar with 256 x 8-bit static RAM	241
PCF8591	8-bit ADC/DAC	259
SAA1064	4-digit LED driver	347
SAA1136	PCM-audio ident-word interface (IDI)	405
SAA1300	tuner switching circuit	417
SAA3028	high performance transcoder (RC-5) for infrared remote control	445
SAA5243	enhanced computer controlled teletext circuit (ECCT)	471
SAA9050	digital multistandard decoder	605
SAB3035	computer interface for tuning and control (CITAC); 8 DACs	657
SAB3036	computer interface for tuning and control (CITAC); without DACs	673
SAB3037	computer interface for tuning and control (CITAC); 4 DACs	689
SAF1135	dataline decoder	753
TDA8405	TV and video recorder stereo/dual sound processor	1749
TDA8420	hi-fi stereo audio processor	1759
TDA8440	video/audio switch for CTV receivers	1781
TDA8442	I <sup>2</sup> C bus interface for colour decoders	1791
TDA8443; A	I <sup>2</sup> C bus-controlled YUV/RGB interface circuit	1799
TDA8444	octuple 6-bit DAC	1813
TSA6057	radio tuning PLL frequency synthesizer	1845
<b>MEMORIES</b>		
PCF8570; C	256 x 8-bit static RAM; I <sup>2</sup> C bus	145
PCF8571	128 x 8-bit static RAM; I <sup>2</sup> C bus	145
PCF8582	256 x 8-bit static EEPROM; I <sup>2</sup> C bus	233
PCF8583	clock calendar with 256 x 8-bit static RAM; I <sup>2</sup> C bus	241
SAB3013	6-function analogue memory; $\mu$ C controlled	649

# FUNCTIONAL INDEX

type number	description		page	
<b>MICROCONTROLLERS</b>				
<b>CMOS 8-bit</b>				
	<u>RAM</u>	<u>ROM</u>		
PCB80C31BH-3	128	—	ROM-less version of PCB80C51BH-3	49
PCB80C39	128	—	ROM-less version of PCB80C49	51
PCB80C49	128	2K	mask-programmable ROM	51
PCB80C51BH-3	128	4K	mask-programmable ROM	49
PCB80C552	256	—	ROM-less version of PCB83C552	53
PCB80C652	256	—	ROM-less version of PCB83C652	55
PCB80C654	256	—	ROM-less version of PCB83C654	57
PCB83C552	256	8K	plus I <sup>2</sup> C bus hardware	53
PCB83C652	256	8K	plus I <sup>2</sup> C bus hardware	55
PCB83C654	256	8K	plus I <sup>2</sup> C bus hardware	57
PCF80C31BH-3	128	—	ROM-less version of PCB80C51BH-3 extended temperature	49
PCF80CA31BH-3	128	—	ROM-less version of PCB80C51BH-3 automotive temperature	49
PCF80C39	128	—	ROM-less version of PCB80C49; extended temperature	51
PCF80C49	128	2K	like PCB80C49; extended temperature	51
PCF80C51BH-3	128	4K	mask-programmable ROM	49
PCF80CA51BH-3	128	4K	mask-programmable ROM	49
PCF84C00	256	—	bond-out version of PCF84CXX family	67
PCF84C12	64	1K	extended temperature	69
PCF84C21	64	2K	extended temperature	67
PCF84C41	128	4K	extended temperature	67
PCF84C81	256	8K	extended temperature	67
<b>NMOS 8-bit</b>				
MAB8031AH	128	—	ROM-less version of MAB8051AH	39
MAB8032AH	256	—	ROM-less version of MAB8052AH	41
MAB8035HL	64	—	ROM-less version of MAB8048H	43
MAB8039HL	128	—	ROM-less version of MAB8049H	43
MAB8040HL	256	—	ROM-less version of MAB8050H	43
MAB8048H	64	1K	mask-programmable ROM	43
MAB8049H	128	2K	mask-programmable ROM	43
MAB8050H	256	4K	mask-programmable ROM	43
MAB8051AH	128	4K	mask-programmable ROM	39
MAB8052AH	256	8K	mask-programmable ROM	41
MAB8401	128	—	bond-out version for MAB84XX family plus 8-bit LED driver	45
MAB8411	64	1K	plus 8-bit LED driver	45
MAB8421	64	2K	plus 8-bit LED driver	45
MAB8422	64	2K	plus 8-bit LED driver	47
MAB8441	128	4K	plus 8-bit LED driver	45
MAB8442	128	4K	plus 8-bit LED driver	47
MAB8461	128	6K	plus 8-bit LED driver	45
MAF8031AH	128	—	ROM-less version of MAB8051AH; extended temperature; reduced frequency	39

Operating temperature range: 0 to 70 °C.  
 Extended temperature range: -40 to + 85 °C.  
 Automotive temperature range: -40 to + 110 °C.

type number	description		page
<b>MICROCONTROLLERS (continued)</b>			
	RAM	ROM	
MAF8032AH	256	—	ROM-less version of MAB8052AH; extended temperature 41
MAF8035HL	64	—	ROM-less version of MAB8048H; extended temperature 43
MAF8039HL	128	—	ROM-less version of MAB8049H; extended temperature 43
MAF8040HL	256	—	ROM-less version of MAB8050H; extended temperature 43
MAF8048H	64	1K	like MAB8048H; extended temperature 43
MAF8049H	128	2K	like MAB8049H; extended temperature 43
MAF8050H	256	4K	like MAB8050H; extended temperature 43
MAF8051AH	128	4K	like MAB8051AH; extended temperature 39
MAF8052AH	256	8K	like MAB8052AH; extended temperature 41
MAF80A31AH	128	—	ROM-less version of MAB8051AH; automotive temperature; reduced frequency 39
MAF80A32AH	256	—	ROM-less version of MAB8032AH; automotive temperature; reduced frequency 41
MAF80A35HL	64	—	ROM-less version of MAB8048AH; automotive temperature; reduced frequency 43
MAF80A39HL	128	—	ROM-less version of MAB8049H; automotive temperature; reduced frequency 43
MAF80A40HL	256	—	ROM-less version of MAB8050H; automotive temperature; reduced frequency 43
MAF80A48H	64	1K	like MAB8048H; automotive temperature; reduced frequency 43
MAF80A49H	128	2K	like MAB8049H; automotive temperature; reduced frequency 43
MAF80A50H	256	4K	like MAB8050H; automotive temperature; reduced frequency 43
MAF80A51AH	128	4K	like MAB8051AH; automotive temperature; reduced frequency 39
MAF80A52AH	256	8K	like MAB8052AH; automotive temperature; reduced frequency 41
MAF8411	64	1K	plus 8-bit LED driver; extended temperature 45
MAF8421	64	2K	plus 8-bit LED driver; extended temperature 45
MAF8422	64	2K	plus 8-bit LED driver; extended temperature 47
MAF8441	128	4K	plus 8-bit LED driver; extended temperature 45
MAF8442	128	4K	plus 8-bit LED driver; extended temperature 47
MAF8461	128	6K	plus 8-bit LED driver; extended temperature 45
MAF84A11	64	1K	plus 8-bit LED driver; automotive temperature; reduced frequency 45
MAF84A21	64	2K	plus 8-bit LED driver; automotive temperature; reduced frequency 45
MAF84A22	64	2K	plus 8-bit LED driver; automotive temperature; reduced frequency 47
MAF84A41	128	4K	plus 8-bit LED driver; automotive temperature; reduced frequency 45
MAF84A42	128	4K	plus 8-bit LED driver; automotive temperature; reduced frequency 47
MAF84A61	128	6K	plus 8-bit LED driver; automotive temperature; reduced frequency 45



# FUNCTIONAL INDEX

type number	description	page
<b>POWER SUPPLY CONTROL</b>		
<b>SMPS controllers</b>		
TDA2581; Q	control circuit for SMPS	1097
TEA1039	control circuit for SMPS	1825
<b>PPS controllers</b>		
TDA2582; Q	control circuit for PPS	1109
<b>RECORDER ICs</b>		
SAA1131	PCM-audio error corrector-1 (ECO-1)	373
SAA1132	PCM-audio error corrector-2 (ECO-2)	385
SAA1133	PCM-audio analogue/digital interface (ADI)	393
SAA1136	PCM-audio ident-word interface (IDI); I <sup>2</sup> C bus	405
SAA5235	dataline slicer	465
SAD1009	universal DAC (UDAC)	711
SAD1010	automatic tracking oscillator and digital-to-analogue converter (ATO/DAC)	723
SAF1135	dataline decoder; I <sup>2</sup> C bus	753
TDA2501	PAL/NTSC encoder	921
TDA2504	FM modem for 8 mm video cassette recorders	927
TDA2507; T	FM modulator controller	969
TDA2730	FM limiter/demodulator	1199
TDA2740	amplifier and drop-out identification circuit	1207
TDA3724	SECAM identification circuit	1461
TDA3725	SECAM (L) chrominance signal processor	1463
TDA3730	frequency demodulator and drop-out compensator	1467
TDA3740	video processor/frequency modulator	1473
TDA3755	PAL/NTSC sync processor (VHS system)	1481
TDA3760	PAL chrominance signal processor (VHS system)	1491
TDA3765	NTSC chrominance signal processor (VHS system)	1499
TDA3771	video processor	1507
TDA3780	frequency modulator	1513
TDA3791	band selector and window detector	1517
TDA8405	TV and video recorder stereo/dual sound processor; I <sup>2</sup> C bus	1749
TEA2000	PAL/NTSC colour encoder	1837
<b>REMOTE I/O EXPANDERS</b>		
PCF8574	remote 8-bit I/O expander; I <sup>2</sup> C bus	171
PCF8574A	remote 8-bit I/O expander; different slave address; I <sup>2</sup> C bus	171
<b>REMOTE CONTROLLERS</b>		
SAA3004	high performance transmitter (455 kHz) for infrared remote control; up to 448 commands	421
SAA3006	high performance transmitter (RC-5) for infrared remote control; up to 2048 commands	431
SAA3028	high performance transcoder (RC-5) for infrared remote control; I <sup>2</sup> C bus	445

type number	description	page
SAF 1032P	receiver/decoder for infrared remote control	739
SAF 1039P	transmitter for infrared remote control	739
TDA3047	high performance receiver for infrared remote control; positive output voltage	1229
TDA3048	high performance receiver for infrared remote control; negative output voltage	1235
<b>SMALL SIGNAL COMBINATION ICs</b>		
<b>Black-white TV</b>		
TDA4500	small signal combination for B/W TV	1597
TDA4503	small signal combination for B/W TV	1623
<b>Colour TV</b>		
TDA4501	small signal combination for colour TV	1609
TDA4505	small signal combination for colour TV	1637
<b>SOUND ICs</b>		
SAA1131	PCM-audio error corrector-1 (ECO-1)	373
SAA1132	PCM-audio error corrector-2 (ECO-2)	385
SAA1133	PCM-audio analogue/digital interface (ADI)	393
SAA1136	PCM-audio ident-word interface (IDI); I <sup>2</sup> C bus	405
TBA120U	sound IF amplifier/demodulator	765
TDA1013A	4 W audio power amplifier with DC volume control	777
TDA1015	1 to 4 W audio power amplifier with preamplifier	781
TDA1015T	0,5 W audio power amplifier with preamplifier	791
TDA1029	signal sources switch (2 x 4-channel)	797
TDA1512; Q	12 to 20 W hi-fi audio power amplifier	817
TDA1520B	20 W hi-fi audio power amplifier; complete thermal protection	823
TDA1521; Q	2 x 12 W hi-fi stereo audio power amplifier	829
TDA1521A	2 x 6 W hi-fi stereo audio power amplifier	839
TDA1524A	stereo-tone/volume control circuit	849
TDA2543	AM sound IF circuit for French standard	1001
TDA2545A	quasi-split-sound circuit	1015
TDA2546A	quasi-split-sound circuit with 5,5 MHz demodulation	1021
TDA2555	dual FM demodulator for TV sound (8-stage limiter)	1041
TDA2556	quasi-split-sound circuit with dual sound demodulators	1047
TDA2557	dual FM demodulator for TV sound (5-stage limiter)	1041
TDA2611A	5 W audio power amplifier	1149
TDA2613	6 W hi-fi audio power amplifier	1159
TDA2791	TV sound combination, volume, treble, bass	1211
TDA2795	TV stereo/dual sound identification decoder	1223
TDA3800G	stereo/dual TV sound processor (dynamic selection)	1523
TDA3800GS	stereo/dual TV sound processor (static selection)	1523
TDA3803A	stereo/dual TV sound decoder	1531
TDA3806	multiplex PLL stereo decoder	1539
TDA3808	second audio programme (SAP) signal processor	1545
TDA3810	spatial, stereo and pseudo-stereo sound circuit	1551
TDA8405	TV and video recorder stereo/dual sound processor; I <sup>2</sup> C bus	1749
TDA8420	hi-fi stereo audio processor; I <sup>2</sup> C bus	1759

# FUNCTIONAL INDEX

type number	description	page
<b>SYNC PROCESSORS</b>		
<b>Horizontal</b>		
TBA920S	horizontal combination	771
TDA2593	horizontal combination	1123
TDA2594	horizontal combination with transmitter identification	1131
TDA2595	horizontal combination with transmitter identification and protection circuits	1139
<b>Vertical</b>		
TDA2577A	sync circuit with vertical oscillator and driver stages	1053
TDA2578A	sync circuit with vertical oscillator and driver stages	1067
TDA2653A	vertical deflection circuit; PIL-S4; 30AX systems and monitors	1167
TDA2654	vertical deflection circuit; monochrome 110°; tiny-vision colour 90°	1175
TDA2655B	vertical deflection circuit; colour and monochrome 90°	1183
TDA2658	vertical deflection circuit (90°)	1191
TDA3651	vertical deflection circuit (90°)	1429
TDA3651A; AQ	vertical deflection circuit (90°)	1429
TDA3652; Q	vertical deflection circuit (110°)	1437
TDA3653; A	vertical deflection and guard circuit (90°)	1443
TDA3654; Q	vertical deflection and guard circuit (110°)	1451
<b>Horizontal/vertical</b>		
TDA2579	synchronization circuit (625 lines)	1081
TDA3586	synchronization processor	1383
<b>TEXT SYSTEMS</b>		
SAA5231	teletext video processor	453
SAA5235	dataline slicer for video recorders	465
SAA5243	enhanced computer controlled teletext circuit (ECCT); I <sup>2</sup> C bus	471
SAA5250	teletext interface for data acquisition and control	497
SAA5350	EUROM, CRT controller (CEPT standard)	529
SAA5355	FTFROM, CRT controller (525-line)	557
SAA9040	computer-controlled teletext extension	595
TDA3596	echo equalizer for teletext	1421
<b>TUNING CIRCUITS</b>		
SAA1057	radio tuning PLL frequency synthesizer	319
SAA1300	tuner switching circuit; I <sup>2</sup> C bus	417
SAB3013	6-function analogue memory; $\mu$ C controlled	649
SAB3035	computer interface for tuning and control (CITAC) 8 DACs; I <sup>2</sup> C bus	657
SAB3036	computer interface for tuning and control (CITAC) without DACs; I <sup>2</sup> C bus	673



type number	description	page
SAB3037	computer interface for tuning and control (CITAC) 4 DACs; I <sup>2</sup> C bus	689
SAB6456; T	sensitive 1 GHz divide-by-64/divide-by-256 switchable prescaler	705
TDA5030A	mixer/oscillator for VHF tuner	1701
TDA5030AT	mixer/oscillator for VHF tuner	1707
TDA5230T	VHF, UHF and hyperband mixer/oscillator for TV tuners	1713
TSA6057	radio tuning PLL frequency synthesizer	1845
<b>VIDEO/AUDIO SWITCH</b>		
TDA8440	video/audio switch for CTV receivers; I <sup>2</sup> C bus	1781
TDA8443; A	I <sup>2</sup> C bus-controlled YUV/RGB interface circuit	1799
TDA9045	video processor and input selector	1819
<b>VIDEO GAMES</b>		
SAA1099	stereo sound generator for sound effects and music synthesis; $\mu$ C controlled	357
TDA2505	SECAM encoder (video games)	937
TDA2506	SECAM encoder	945
TDA2506T	SECAM encoder	957
<b>VISION IF</b>		
TDA2540; Q	IF amplifier and demodulator; npn tuners	977
TDA2541; Q	IF amplifier and demodulator; pnp tuners	985
TDA2542; Q	IF amplifier and demodulator; pnp tuners (E and L standard)	993
TDA2544; Q	IF amplifier and demodulator; MOS tuners	1007
TDA2548; Q	IF amplifier and demodulator; pnp tuners	1027
TDA2549	IF amplifier and demodulator for multistandard TV receivers	1035
TDA8340; Q	TV IF amplifier and demodulator; npn tuners	1737
TDA8341; Q	TV IF amplifier and demodulator; pnp tuners	1737



NUMERICAL INDEX

(excluding microcontrollers)

type number	description	package code	page
PCF1303T	18-element bar graph LCD driver (with analogue input)	SO-28; SOT-136A	71
PCF2100P	LCD duplex driver; 40 segments	DIL-28; SOT-117	77
PCF2100T	LCD duplex driver; 40 segments	SO-28; SOT-136A	77
PCF2110P	LCD duplex driver; 60 segments and 2 LEDs	DIL-40; SOT-129	77
PCF2110T	LCD duplex driver; 60 segments and 2 LEDs	VSO-40; SOT-158A	77
PCF2111P	LCD duplex driver; 64 segments	DIL-40; SOT-129	77
PCF2111T	LCD duplex driver; 64 segments	VSO-40; SOT-158A	77
PCF2112P	LCD driver; 32 segments	DIL-40; SOT-129	77
PCF2112T	LCD driver; 32 segments	VSO-40; SOT-158A	77
PCF2201V	LCD flat panel row/column driver	120 lead TAB	93
PCF8566P	universal LCD driver for low multiplex rates (1:1 to 1:4); max. 96 elements; I <sup>2</sup> C bus	DIL-40; SOT-129	115
PCF8566T	universal LCD driver for low multiplex rates (1:1 to 1:4); max. 96 elements; I <sup>2</sup> C bus	VSO-40; SOT-158A	115
PCF8570P	256 x 8-bit static RAM; I <sup>2</sup> C bus	DIL-8; SOT-97	145
PCF8570T	256 x 8-bit static RAM; I <sup>2</sup> C bus	SO-8L; SOT-176	145
PCF8570CP	256 x 8-bit static RAM; I <sup>2</sup> C bus	DIL-8; SOT-97	145
PCF8570CT	256 x 8-bit static RAM; I <sup>2</sup> C bus	SO-8L; SOT-176	145
PCF8571P	128 x 8-bit static RAM; I <sup>2</sup> C bus	DIL-8; SOT-97	145
PCF8571T	128 x 8-bit static RAM; I <sup>2</sup> C bus	SO-8L; SOT-176	145
PCF8573P	clock/calendar; I <sup>2</sup> C bus	DIL-16; SOT-38	155
PCF8573T	clock/calendar; I <sup>2</sup> C bus	SO-16L; SOT-162A	155
PCF8574P	remote 8-bit I/O expander; I <sup>2</sup> C bus	DIL-16; SOT-38	171
PCF8574T	remote 8-bit I/O expander; I <sup>2</sup> C bus	SO-16L; SOT-162A	171
PCF8574AP	remote 8-bit I/O expander; different slave address; I <sup>2</sup> C bus	DIL-16; SOT-38	171
PCF8574AT	remote 8-bit I/O expander; different slave address; I <sup>2</sup> C bus	SO-16L; SOT-162A	171
PCF8576T	universal LCD driver for low multiplex rates (1:1 to 1:4); max. 160 segments; I <sup>2</sup> C bus	VSO-56; SOT-190	183
PCF8576U	universal LCD driver for low multiplex rates (1:1 to 1:4); max. 160 segments; I <sup>2</sup> C bus	uncased chip in tray	183
PCF8576U/10	universal LCD driver for low multiplex rates (1:1 to 1:4); max. 160 segments; I <sup>2</sup> C bus	chip-on-film frame carrier (FFC)	183
PCF8577P	LCD direct driver (32 segments) or duplex driver (64 segments); I <sup>2</sup> C bus	DIL-40; SOT-129	217
PCF8577T	LCD direct driver (32 segments) or duplex driver (64 segments); I <sup>2</sup> C bus	VSO-40; SOT-158A	217
PCF8577AP	LCD direct driver (32 segments) or duplex driver (64 segments); I <sup>2</sup> C bus; different slave address	DIL-40; SOT-129	217
PCF8577AT	LCD direct driver (32 segments) or duplex driver (64 segments); I <sup>2</sup> C bus; different slave address	VSO-40; SOT-158A	217

# NUMERICAL INDEX

type number	description	package code	page
PCF8582P	256 x 8-bit static EEPROM; I <sup>2</sup> C bus	DIL-8; SOT-97	233
PCF8583P	clock calendar with 256 x 8-bit static RAM; I <sup>2</sup> C bus	DIL-8; SOT-97	241
PCF8583T	clock calendar with 256 x 8-bit static RAM; I <sup>2</sup> C bus	SO-8L; SOT-176	241
PCF8591P	8-bit ADC/DAC; I <sup>2</sup> C bus	DIL-16; SOT-38	259
PCF8591T	8-bit ADC/DAC; I <sup>2</sup> C bus	SO-16L; SOT-162A	259
PNA7509	7-bit ADC, 22 MHz, 3-state output	DIL-24; SOT-101A	277
PNA7518	8-bit multiplying DAC; 30 MHz	DIL-16; SOT-38D	289
SAA1043	universal sync generator	DIL-28; SOT-117	295
SAA1044	subcarrier coupler circuit	DIL-16; SOT-38	311
SAA1057	radio tuning PLL frequency synthesizer	DIL-18; SOT-102H	319
SAA1060	LED display/interface circuit	DIL-24; SOT-101A	329
SAA1062A	LCD display/interface circuit	DIL-28; SOT-117	335
SAA1062AT	LCD display/interface circuit	SO-28; SOT-136A	335
SAA1063	fluorescent display/interface circuit	DIL-24; SOT-101A	341
SAA1064P	4-digit LED driver; I <sup>2</sup> C bus	DIL-24; SOT-101B	347
SAA1099	stereo sound generator for sound effects and music synthesis; $\mu$ C controlled	DIL-18; SOT-102M	357
SAA1131P	PCM-audio error corrector-1 (ECO-1)	DIL-40; SOT-129	373
SAA1131T	PCM-audio error corrector-1 (ECO-1)	VSO-40; SOT-158A	373
SAA1132P	PCM-audio error corrector-2 (ECO-2)	DIL-20; SOT-146	385
SAA1132T	PCM-audio error corrector-2 (ECO-2)	SO-20; SOT-163A	385
SAA1133P	PCM-audio analogue/digital interface (ADI)	DIL-24; SOT-101B	393
SAA1133T	PCM-audio analogue/digital interface (ADI)	SO-24; SOT-137A	393
SAA1136P	PCM-audio ident-word interface (IDI) I <sup>2</sup> C bus	DIL-20; SOT-146	405
SAA1136T	PCM-audio ident-word interface (IDI) I <sup>2</sup> C bus	SO-20; SOT-163A	405
SAA1300	tuner switching circuit; I <sup>2</sup> C bus	SIL-9; SOT-142	417
SAA3004P	high performance transmitter (455 kHz) for infrared remote control; up to 448 commands	DIL-20; SOT-146	421
SAA3004T	high performance transmitter (455 kHz) for infrared remote control; up to 448 commands	SO-20; SOT-163A	421
SAA3006	high performance transmitter (RC-5) for infrared remote control; up to 2048 commands	DIL-28; SOT-117	431
SAA3028	high performance transcoder (RC-5) for infrared remote control; I <sup>2</sup> C bus	DIL-16; SOT-38Z	445
SAA5231	teletext video processor	DIL-28; SOT-117	453
SAA5235	dataline slicer for video cassette recorders	DIL-28; SOT-117	465
SAA5243	enhanced computer controlled teletext circuit (ECCT); I <sup>2</sup> C bus	DIL-40; SOT-129	471
SAA5250P	teletext interface for data acquisition and control	DIL-40; SOT-129	497
SAA5250T	interface for data acquisition and control	VSO-40; SOT-158A	497
SAA5350	EUROM, CRT controller (CEPT standard)	DIL-40; SOT-129	529
SAA5355	FTFROM, CRT controller (525-line)	DIL-40; SOT-129	557

# NUMERICAL INDEX

type number	description	package code	page
SAA9030	background memory controller	DIL-24; SOT-101B	585
SAA9040	computer-controlled teletext extension	DIL-28; SOT-117	595
SAA9050	digital multistandard decoder; I <sup>2</sup> C bus	DIL-40; SOT-129	605
SAA9057	clock generator circuit	DIL-20; SOT-146	637
SAA9058	sample-rate converter	DIL-20; SOT-146	643
SAB3013	6-function analogue memory; $\mu$ C controlled	DIL-16; SOT-38	649
SAB3035	computer interface for tuning and control (CITAC); 8 DACs; I <sup>2</sup> C bus	DIL-28; SOT-117	657
SAB3036	computer interface for tuning and control (CITAC); without DACs; I <sup>2</sup> C bus	DIL-18; SOT-102H	673
SAB3037	computer interface for tuning and control (CITAC); 4 DACs; I <sup>2</sup> C bus	DIL-24; SOT-101A	689
SAB6456	sensitive 1 GHz divide-by-64/divide-by-256 switchable prescaler	DIL-8; SOT-97	705
SAB6456T	sensitive 1 GHz divide-by-64/divide-by-256 switchable prescaler	SO-8; SOT-96A	705
SAD1009P	universal DAC (UDAC)	DIL-24; SOT-101A	711
SAD1009T	universal DAC (UDAC)	SO-24; SOT-137A	711
SAD1010P	automatic tracking oscillator and digital-to-analogue converter (ATO/DAC)	DIL-28; SOT-117	723
SAD1010T	automatic tracking oscillator and digital-to-analogue converter (ATO/DAC)	SO-28; SOT-136A	723
SAF1032P	receiver/decoder for infrared remote control	DIL-18; SOT-102H	739
SAF1039P	transmitter for infrared remote control	DIL-16; SOT-38Z	739
SAF1135	dataline decoder; I <sup>2</sup> C bus	DIL-14; SOT-27	753
TBA120U	sound IF amplifier/demodulator	DIL-14; SOT-27	765
TBA920S	horizontal combination	DIL-16; SOT-38	771
TDA1013A	4 W audio power amplifier with DC volume control	SIL-9; SOT-110B	777
TDA1015	1 to 4 W audio power amplifier with preamplifier	SIL-9; SOT-110B	781
TDA1015T	0,5 W audio power amplifier with preamplifier	SO-8; SOT-96A	791
TDA1029	signal source switch (2 x 4-channel)	DIL-16; SOT-38	797
TDA1082	east-west correction driver circuit	DIL-16; SOT-38	811
TDA1512	12 to 20 W hi-fi audio power amplifier	SIL-9; SOT-131	817
TDA1512Q	12 to 20 W hi-fi audio power amplifier	SBD-9; SOT-157	817
TDA1520B	20 W hi-fi audio power amplifier; complete thermal protection	SIL-9; SOT-131	823
TDA1521	2 x 12 W hi-fi stereo audio power amplifier	SIL-9; SOT-131	829
TDA1521A	2 x 6 W hi-fi stereo audio power amplifier	SIL-9; SOT-110B	839
TDA1521Q	2 x 12 W hi-fi stereo audio power amplifier	SBD-9; SOT-157	829
TDA1524A	stereo-tone/volume control circuit	DIL-18; SOT-102H	849
TDA1534	14-bit ADC	DIL-28; SOT-117	899

# NUMERICAL INDEX

type number	description	package code	page
TDA1540P	14-bit DAC	DIL-28; SOT-117	907
TDA1541A	dual 16-bit DAC	DIL-28; SOT-117	913
TDA2501	PAL/NTSC encoder	DIL-16; SOT-38	921
TDA2504P	FM modem for 8 mm video cassette recorders	DIL-24; SOT-101A	927
TDA2504T	FM modem for 8 mm video cassette recorders	SO-24; SOT-137A	927
TDA2505	SECAM encoder (video games)	DIL-28; SOT-117	937
TDA2506	SECAM encoder	DIL-24; SOT-101B	945
TDA2506T	SECAM encoder	SO-24; SOT-137A	957
TDA2507	FM modulator controller for video recorders	DIL-16; SOT-38	969
TDA2507T	FM modulator controller for video recorders	SO-16L; SOT-162A	969
TDA2540	IF amplifier and demodulator; npn tuners	DIL-16; SOT-38	977
TDA2540Q	IF amplifier and demodulator; npn tuners	QIL-16; SOT-58	977
TDA2541	IF amplifier and demodulator; pnp tuners	DIL-16; SOT-38	985
TDA2541Q	IF amplifier and demodulator; pnp tuners	QIL-16; SOT-58	985
TDA2542	IF amplifier and demodulator; pnp tuners (E and L standard)	DIL-16; SOT-38	993
TDA2542Q	IF amplifier and demodulator; pnp tuners (E and L standard)	QIL-16; SOT-58	993
TDA2543	AM sound IF circuit for French standard	DIL-18; SOT-102H	1001
TDA2544	IF amplifier and demodulator; MOS tuners	DIL-16; SOT-38	1007
TDA2544Q	IF amplifier and demodulator; MOS tuners	QIL-16; SOT-58	1007
TDA2545A	quasi-split-sound circuit	DIL-16; SOT-38	1015
TDA2546A	quasi-split-sound circuit with 5,5 MHz demodulation	DIL-18; SOT-102H	1021
TDA2548	IF amplifier and demodulator; pnp tuners	DIL-16; SOT-38	1027
TDA2548Q	IF amplifier and demodulator; pnp tuners	QIL-16; SOT-58	1027
TDA2549	IF amplifier and demodulator for multistandard TV receivers	DIL-24; SOT-101A	1035
TDA2555	dual FM demodulator for TV sound (8-stage limiter)	DIL-18; SOT-102H	1041
TDA2556	quasi-split-sound circuit with dual sound demodulators	DIL-24; SOT-101B	1047
TDA2557	dual FM demodulator for TV sound (5-stage limiter)	DIL-18; SOT-102H	1041
TDA2577A	sync circuit with vertical oscillator and driver stages	DIL-18; SOT-102H	1053
TDA2578A	sync circuit with vertical oscillator and driver stages	DIL-18; SOT-102H	1067
TDA2579	synchronization circuit (625 lines)	DIL-18; SOT-102H	1081
TDA2581	control circuit for SMPS	DIL-16; SOT-38	1097
TDA2581Q	control circuit for SMPS	QIL-16; SOT-58	1097
TDA2582	control circuit for PPS	DIL-16; SOT-38	1109
TDA2582Q	control circuit for PPS	QIL-16; SOT-58	1109
TDA2593	horizontal combination	DIL-16; SOT-38	1123
TDA2594	horizontal combination with transmitter identification	DIL-18; SOT-102H	1131
TDA2595	horizontal combination with transmitter identification and protection circuits	DIL-18; SOT-102H	1139
TDA2611A	5 W audio power amplifier	SIL-9; SOT-110B	1149
TDA2613	6 W hi-fi audio power amplifier	SIL-9; SOT-110B	1159

type number	description	package code	page
TDA2653A	vertical deflection circuit; PIL-S4; 30AX systems and monitors	DIL-13; SOT-141B	1167
TDA2654	vertical deflection circuit; monochrome, 110°; tiny-vision colour, 90°	SIL-9; SOT-110B	1175
TDA2655B	vertical deflection circuit; colour and monochrome, 90°	DIL-12; SOT-150	1183
TDA2658	vertical deflection circuit (90°)	DIL-13; SOT-141B	1191
TDA2730	FM limiter/demodulator (video recorders)	DIL-16; SOT-38	1199
TDA2740	amplifier and drop-out identification circuit (video recorders)	DIL-16; SOT-38	1207
TDA2791	TV sound combination; volume, treble, bass	DIL-16; SOT-38	1211
TDA2795	TV stereo/dual sound identification decoder	DIL-18; SOT-102H	1223
TDA3047P	high performance receiver for infrared remote control; positive output voltage	DIL-16; SOT-38	1229
TDA3047T	high performance receiver for infrared remote control; positive output voltage	SO-16L; SOT-162A	1229
TDA3048P	high performance receiver for infrared remote control; negative output voltage	DIL-16; SOT-38	1235
TDA3048T	high performance receiver for infrared remote control; negative output voltage	SO-16L; SOT-162A	1235
TDA3501	video control combination	DIL-28; SOT-117	1241
TDA3505	PAL/SECAM video control with automatic cut-off control; -(B-Y) and -(R-Y) input	DIL-28; SOT-117	1249
TDA3506	PAL/SECAM video control with automatic cut-off control; +(B-Y) and +(R-Y) input	DIL-28; SOT-117	1249
TDA3507	PAL/SECAM video control with automatic cut-off control; -(B-Y) and -(R-Y) input	DIL-28; SOT-117	1259
TDA3510	PAL decoder	DIL-24; SOT-101A	1271
TDA3560	PAL decoder	DIL-28; SOT-117	1275
TDA3561A	PAL decoder	DIL-28; SOT-117	1285
TDA3562A	PAL/NTSC decoder	DIL-28; SOT-117	1297
TDA3563	NTSC decoder	DIL-28; SOT-117	1313
TDA3564	NTSC decoder without RGB inputs	DIL-24; SOT-101AB	1323
TDA3565	PAL decoder	DIL-18; SOT-102H	1333
TDA3566	PAL/NTSC decoder	DIL-28; SOT-117	1341
TDA3567	NTSC decoder	DIL-18; SOT-102H	1359
TDA3569	NTSC decoder with fast RGB blanking	DIL-20; SOT-146EE7	1371
TDA3586	horizontal and vertical synchronization processor	DIL-28; SOT-117	1383
TDA3590A	SECAM processor circuit (improved TDA3590)	DIL-24; SOT-101B	1391
TDA3592A	SECAM/PAL transcoder	DIL-24; SOT-101B	1407
TDA3596	echo equalizer for teletext	DIL-16; SOT-38	1421
TDA3651	vertical deflection circuit (90°)	SIL-9; SOT-110B	1429
TDA3651A	vertical deflection circuit (90°)	SIL-9; SOT-131	1429
TDA3651AQ	vertical deflection circuit (90°)	SBD-9; SOT-157	1429
TDA3652	vertical deflection circuit (110°)	SIL-9; SOT-131	1437
TDA3652Q	vertical deflection circuit (110°)	SBD-9; SOT-157	1437
TDA3653	vertical deflection with guard circuit (90°)	SIL-9; SOT-110B	1443
TDA3653A	vertical deflection with guard circuit (90°)	SIL-9; SOT-131	1443

# NUMERICAL INDEX

type number	description	package code	page
TDA3654	vertical deflection with guard circuit (110°)	SIL-9; SOT-131	1451
TDA3654Q	vertical deflection with guard circuit (110°)	SBD-9; SOT-157	1451
TDA3724	SECAM identification circuit for video recorders	DIL-18; SOT-102K	1461
TDA3725	SECAM (L) chrominance signal processor for video recorders	DIL-18; SOT-102K	1463
TDA3730	frequency demodulator and drop-out compensator for video recorders	DIL-28; SOT-117	1467
TDA3740	video processor/frequency modulator for video recorders	DIL-28; SOT-117	1473
TDA3755	PAL/NTSC sync processor for video recorders (VHS system)	DIL-18; SOT-102H	1481
TDA3760	PAL chrominance signal processor for video recorders (VHS system)	DIL-28; SOT-117	1491
TDA3765	NTSC chrominance signal processor for video recorders (VHS system)	DIL-28; SOT-117	1499
TDA3771	video processor for video recorders	DIL-18; SOT-102H	1507
TDA3780	frequency modulator for video recorders	DIL-18; SOT-102H	1513
TDA3791	band selector and window detector	DIL-16; SOT-38	1517
TDA3800G	stereo/dual TV sound processor (dynamic selection)	DIL-28; SOT-117	1523
TDA3800GS	stereo/dual TV sound processor (static selection)	DIL-28; SOT-117	1523
TDA3803A	stereo/dual TV sound decoder	DIL-28; SOT-117	1531
TDA3806	multiplex PLL stereo decoder	DIL-18; SOT-102H	1539
TDA3808	second audio programme (SAP) signal processor	DIL-16; SOT-38	1545
TDA3810	spatial, stereo and pseudo-stereo sound circuit	DIL-18; SOT-102H	1551
TDA4301	vertical driver (video camera)	DIL-16; SOT-38	1555
TDA4301T	vertical driver (video camera)	SO-14; SOT-108A	1559
TDA4302	pixel generator circuit (video camera)	DIL-16; SOT-38	1563
TDA4302T	pixel generator circuit (video camera)	SO-16L; SOT-162A	1563
TDA4303P	white processing encoder (video camera)	DIL-28; SOT-117	1569
TDA4303T	white processing encoder (video camera)	SO-28; SOT-136A	1569
TDA4304	DC control circuit (video camera)	SO-28; SOT-136A	1579
TDA4305T	horizontal driver circuit (video camera)	SO-14; SOT-108A	1585
TDA4306P	master gain circuit (video camera)	DIL-20; SOT-146	1591
TDA4306T	master gain circuit (video camera)	SO-20; SOT-163A	1591
TDA4500	small signal combination for B/W TV	DIL-28; SOT-117	1597
TDA4501	small signal combination for colour TV	DIL-28; SOT-117	1609
TDA4503	small signal combination for B/W TV	DIL-28; SOT-117	1623
TDA4505	small signal combination for colour TV	DIL-28; SOT-117	1637
TDA4510	PAL decoder	DIL-16; SOT-38	1653
TDA4532	SECAM decoder	DIL-28; SOT-117	1659
TDA4555	multistandard decoder for $-(B-Y)$ and $-(R-Y)$ signals	DIL-28; SOT-117	1665
TDA4556	multistandard decoder for $+(B-Y)$ and $+(R-Y)$ signals	DIL-28; SOT-117	1665
TDA4560	colour transient improvement circuit	DIL-18; SOT-102H	1673
TDA4570	NTSC decoder	DIL-16; SOT-38	1679



type number	description	package code	page
TDA4580	video control combination with automatic cut-off control	DIL-28; SOT-117	1685
TDA5030A	mixer/oscillator for VHF tuner	DIL-18; SOT-102H	1701
TDA5030AT	mixer/oscillator for VHF tuner	SO-20; SOT-163A	1707
TDA5230T	VHF, UHF and hyperband mixer/oscillator for TV tuners	SO-24; SOT-137A	1713
TDA5702	8-bit DAC	DIL-16; SOT-38	1725
TDA5703	8-bit ADC	DIL-24; SOT-101A	1731
TDA8340	TV IF amplifier and demodulator; npn tuners	DIL-16; SOT-38	1737
TDA8340Q	TV IF amplifier and demodulator; npn tuners	QIL-16; SOT-58	1737
TDA8341	TV IF amplifier and demodulator; pnp tuners	DIL-16; SOT-38	1737
TDA8341Q	TV IF amplifier and demodulator; pnp tuners	QIL-16; SOT-58	1737
TDA8405	TV and video recorder stereo/dual sound processor; I <sup>2</sup> C bus	DIL-28; SOT-117	1749
TDA8420	hi-fi stereo audio processor; I <sup>2</sup> C bus	DIL-28; SOT-117	1759
TDA8440	video/audio switch for CTV receivers; I <sup>2</sup> C bus	DIL-18; SOT-102H	1781
TDA8442	I <sup>2</sup> C bus interface for colour decoders	DIL-16; SOT-38	1791
TDA8443	I <sup>2</sup> C bus-controlled YUV/RGB interface circuit	DIL-24; SOT-101B	1799
TDA8443A	I <sup>2</sup> C bus-controlled YUV/RGB interface circuit	DIL-24; SOT-101B	1799
TDA8444	octuple 6-bit DAC; I <sup>2</sup> C bus	DIL-16; SOT-38	1813
TDA9045	video processor and input selector	DIL-18; SOT-102H	1819
TEA1039	control circuit for SMPS	SIL-9; SOT-110B	1825
TEA2000	PAL/NTSC colour encoder	DIL-18; SOT-102H	1837
TSA6057	radio tuning PLL frequency synthesizer; I <sup>2</sup> C bus	DIL-16; SOT-38	1845



NUMERICAL INDEX

(microcontrollers)

type number		description	package code	page
<b>SINGLE-CHIP 8-BIT MICROCONTROLLERS</b>				
	<u>RAM</u>	<u>ROM</u>		
MAB8031AHP	128	—	ROM-less version of MAB8051AH	DIL-40; SOT-129 39
MAB8031AHWP	128	—	ROM-less version of MAB8051AH	PLCC-44; SOT-187 39
MAB8032AHP	256	—	ROM-less version of MAB8052AH	DIL-40; SOT-29 41
MAB8035HLP	64	—	ROM-less version of MAB8048H	DIL-40; SOT-129 43
MAB8035HLWP	64	—	ROM-less version of MAB8048H	PLCC-44; SOT-187 43
MAB8039HLP	128	—	ROM-less version of MAB8049H	DIL-40; SOT-129 43
MAB8039HLWP	128	—	ROM-less version of MAB8049H	PLCC-44; SOT-187 43
MAB8040HLP	256	—	ROM-less version of MAB8050H	DIL-40; SOT-129 43
MAB8048HP	64	1K	mask-programmable ROM	DIL-40; SOT-129 43
MAB8048HWP	64	1K	mask-programmable ROM	PLCC-44; SOT-187 43
MAB8049HP	128	2K	mask-programmable ROM	DIL-40; SOT-129 43
MAB8049HWP	128	2K	mask-programmable ROM	PLCC-44; SOT-187 43
MAB8050HP	256	4K	mask-programmable ROM	DIL-40; SOT-129 43
MAB8051AHP	128	4K	mask-programmable ROM	DIL-40; SOT-129 39
MAB8051AHWP	128	4K	mask-programmable ROM	PLCC-44; SOT-187 39
MAB8052AHP	256	8K	mask-programmable ROM	DIL-40; SOT-129 41
MAB8401B	128	—	bond-out version for MAB84XX	
MAB8401WP	128	—	family plus 8-bit LED driver	28/28 Piggy-back 45
			bond-out version for MAB84XX	
			family plus 8-bit LED driver	PLCC-68; SOT-188 45
MAB8411P	64	1K	plus 8-bit LED driver	DIL-28; SOT-117 45
MAB8411T	64	1K	plus 8-bit LED driver	SO-28; SOT-136A 45
MAB8421P	64	2K	plus 8-bit LED driver	DIL-28; SOT-117 45
MAB8421T	64	2K	plus 8-bit LED driver	SO-28; SOT-136A 45
MAB8422P	64	2K	plus 8-bit LED driver	DIL-20; SOT-146 47
MAB8441P	128	4K	plus 8-bit LED driver	DIL-28; SOT-117 45
MAB8441T	128	4K	plus 8-bit LED driver	SO-28; SOT-136A 45
MAB8442P	128	4K	plus 8-bit LED driver	DIL-20; SOT-146 47
MAB8461P	128	6K	plus 8-bit LED driver	DIL-28; SOT-117 45
MAB8461T	128	6K	plus 8-bit LED driver	SO-28; SOT-136A 45
MAF8031AHP	128	—	ROM-less version of MAB8051AH;	
			extended temperature	DIL-40; SOT-129 39
MAF8031AHWP	128	—	ROM-less version of MAB8051AH;	
			extended temperature	PLCC-44; SOT-187 39
MAF80A31AHP	128	—	ROM-less version of MAB8051AH;	
			automotive temperature;	
			reduced frequency	DIL-40; SOT-129 39
MAF80A31AHWP	128	—	ROM-less version of MAB8051AH;	
			automotive temperature;	
			reduced frequency	PLCC-44; SOT-187 39
MAF8032AHP	256	—	ROM-less version of MAB8052AH;	
			extended temperature	DIL-40; SOT-129 41
MAF80A32AHP	256	—	ROM-less version of MAB8052AH;	
			automotive temperature;	
			reduced frequency	DIL-40; SOT-129 41
MAF8035HLP	64	—	ROM-less version of MAB8048H;	
			extended temperature	DIL-40; SOT-129 43

# NUMERICAL INDEX

type number		description	package code	page
<b>SINGLE-CHIP 8-BIT MICROCONTROLLERS (continued)</b>				
		<u>RAM</u> <u>ROM</u>		
MAF80A35HLP	64	— ROM-less version of MAB8048H; automotive temperature; reduced frequency	DIL-40; SOT-129	43
MAF8039HLP	128	— ROM-less version of MAB8049H; extended temperature	DIL-40; SOT-129	43
MAF80A39HLP	128	— ROM-less version of MAB8049H; automotive temperature; reduced frequency	DIL-40; SOT-129	43
MAF8040HLP	256	— ROM-less version of MAB8050H; extended temperature	DIL-40; SOT-129	43
MAF80A40HLP	256	— ROM-less version of MAB8050H; automotive temperature; reduced frequency	DIL-40; SOT-129	43
MAF8048HP	64	1K like MAB8048H; extended temperature	DIL-40; SOT-129	43
MAF80A48HP	64	1K like MAB8048H; automotive temperature; reduced frequency	DIL-40; SOT-129	43
MAF8049HP	128	2K like MAB8049H; extended temperature	DIL-40; SOT-129	43
MAF80A49HP	128	2K like MAB8049H; automotive temperature; reduced frequency	DIL-40; SOT-129	43
MAF8050HP	256	4K like MAB8050H; extended temperature	DIL-40; SOT-129	43
MAF80A50HP	256	4K like MAB8050H; automotive temperature; reduced frequency	DIL-40; SOT-129	43
MAF8051AHP	128	4K like MAB8051AH; extended temperature	DIL-40; SOT-129	39
MAF8051AHWP	128	4K like MAB8051AH; extended temperature	PLCC-44; SOT-187	39
MAF80A51AHP	128	4K like MAB8051AH; automotive temperature; reduced frequency	DIL-40; SOT-129	39
MAF80A51AHWP	128	4K like MAB8051AH; automotive temperature; reduced frequency	PLCC-44; SOT-187	39
MAF8052AHP	256	8K like MAB8052AHP; extended temperature	DIL-40; SOT-129	41
MAF80A52AHP	256	8K like MAB8052AHP; automotive temperature; reduced frequency	DIL-40; SOT-129	41
MAF8411P	64	1K plus 8-bit LED driver; extended temperature	DIL-28; SOT-117	45
MAF84A11P	64	1K plus 8-bit LED driver; automotive temperature; reduced frequency	DIL-28; SOT-117	45
MAF8421P	64	2K plus 8-bit LED driver; extended temperature	DIL-28; SOT-117	45
MAF84A21P	64	2K plus 8-bit LED driver; automotive temperature; reduced frequency	DIL-28; SOT-117	45

Operating temperature range: 0 to 70 °C.  
 Extended temperature range: -40 to + 85 °C.  
 Automotive temperature range: -40 to + 110 °C.

type description		description	package code	page
<b>SINGLE-CHIP 8-BIT MICROCONTROLLERS (continued)</b>				
		<u>RAM</u>   <u>ROM</u>		
MAF8422P	64	2K plus 8-bit LED driver; extended temperature	DIL-20; SOT-146	47
MAF84A22P	64	2K plus 8-bit LED driver; automotive temperature; reduced frequency	DIL-20; SOT-146	47
MAF8441P	128	4K plus 8-bit LED driver; extended temperature	DIL-28; SOT-117	45
MAF84A41P	128	4K plus 8-bit LED driver; automotive temperature; reduced frequency	DIL-28; SOT-117	45
MAF8442P	128	4K plus 8-bit LED driver; extended temperature	DIL-20; SOT-146	47
MAF84A42P	128	4K plus 8-bit LED driver; automotive temperature; reduced frequency	DIL-20; SOT-146	47
MAF8461P	128	6K plus 8-bit LED driver; extended temperature	DIL-28; SOT-117	45
MAF84A61P	128	6K plus 8-bit LED driver; automotive temperature; reduced frequency	DIL-28; SOT-117	45
PCB80C31 BHP-3	128	— ROM-less version of PCB80C51BH-3	DIL-40; SOT-129	49
PCB80C31 BHWP-3	128	— ROM-less version of PCB80C51BH-3	PLCC-44; SOT-187	49
PCB80C39P	128	— ROM-less version of PCB80C49	DIL-40; SOT-128	51
PCB80C39WP	128	— ROM-less version of PCB80C49	PLCC-44; SOT-187	51
PCB80C49P	128	2K mask programmable ROM	DIL-40; SOT-129	51
PCB80C49WP	128	2K mask programmable ROM	PLCC-44; SOT-187	51
PCB80C51 BHP-3	128	4K mask-programmable ROM	DIL-40; SOT-129	49
PCB80C51 BHWP-3	128	4K mask-programmable ROM	PLCC-44; SOT-187	49
PCB80C552WP	256	— ROM-less version of PCB83C552	PLCC-68; SOT-188	53
PCB80C652P	256	— ROM-less version of PCB83C652	DIL-40; SOT-129	55
PCB80C652WP	256	— ROM-less version of PCB83C652	PLCC-44; SOT-187	55
PCB80C654H	256	— ROM-less version of PCB83C654	QFD-44; SOT-205A	57
PCB80C654P	256	— ROM-less version of PCB83C654	DIL-40; SOT-129	57
PCB80C654WP	256	— ROM-less version of PCB83C654	PLCC-44; SOT-187	57
PCB83C552WP	256	8K plus I <sup>2</sup> C bus hardware	PLCC-68; SOT-188	53
PCB83C652P	256	8K plus I <sup>2</sup> C bus hardware	DIL-40; SOT-129	55
PCB83C652WP	256	8K plus I <sup>2</sup> C bus hardware	PLCC-44; SOT-187	55
PCB83C654H	256	8K plus I <sup>2</sup> C bus hardware	QFD-44; SOT-205A	57
PCB83C654P	256	8K plus I <sup>2</sup> C bus hardware	DIL-40; SOT-129	57
PCB83C654WP	256	8K plus I <sup>2</sup> C bus hardware	PLCC-44; SOT-187	57
PCF80C31 BHP-3	128	— ROM-less version of PCB80C51BH-3 extended temperature	DIL-40; SOT-129	49

Operating temperature range: 0 to 70 °C.  
 Extended temperature range: -40 to + 85 °C.  
 Automotive temperature range: -40 to + 110 °C.

# NUMERICAL INDEX

type number		description	package code	page
<b>SINGLE-CHIP 8-BIT MICROCONTROLLERS (continued)</b>				
	<u>RAM</u>	<u>ROM</u>		
PCF80CA31 BHP-3	128	—	ROM-less version of PCB80C51BH-3 extended temperature	DIL-40; SOT-129 49
PCF80C31 BHWP-3	128	—	ROM-less version of PCB80C51BH-3 extended temperature	PLCC-44; SOT-187A 49
PCF80CA31 BHWP	128	—	ROM-less version of PCB80C51BH-3 automotive temperature	PLCC-44; SOT-187A 49
PCF80C39P	128	—	ROM-less version of PCB80C49; extended temperature	DIL-40; SOT-129 51
PCF80C49P	128	2K	like PCB80C49; extended temperature	DIL-40; SOT-129 51
PCF80C51 BHP-3	128	—	ROM-less version of PCB80C51BH-3 extended temperature	DIL-40; SOT-129 49
PCF80CA51 BHP-3	128	—	ROM-less version of PCB80C51BH-3 extended temperature	DIL-40; SOT-129 49
PCF80C51 BHWP-3	128	—	ROM-less version of PCB80C51BH-3 extended temperature	PLCC-44; SOT-187A 49
PCF80CA51 BHWP-3	128	—	ROM-less version of PCB80C51BH-3 automotive temperature	PLCC-44; SOT-187A 49
PCF84C00B	256		bond-out version PCF84CXX family	28/28 Piggy-back 67
PCF84C00T	256		bond-out version PCF84CXX family	VSO-56; SOT-190 67
PCF84C12P	64		extended temperature	DIL-20; SOT-146 69
PCF84C12T	64	1K	extended temperature	SO-20; SOT-163A 69
PCF84C21P	64	2K	extended temperature	DIL-28; SOT-117 67
PCF84C21T	64	2K	extended temperature	SO-28; SOT-136A 67
PCF84C41P	128	4K	bond-out version PCF84CXX	DIL-28; SOT-117 67
PCF84C41T	128	4K	bond-out version PCF84CXX	SO-28; SOT-136A 67
PCF84C81P	256	8K	extended temperature	DIL-28; SOT-117 67
PCF84C81T	256	8K	extended temperature	SO-28; SOT-136A 67

## MAINTENANCE TYPE LIST

The types listed below are not included in this handbook. Detailed information will be supplied on request.

SAA1056P	PLL frequency synthesizer
SAA1061	LED driver/output port expander
SAA1082	remote transmitter
SAA3027	infrared remote control transmitter
SAA5020	teletext timing chain circuit (625 lines)
SAA5025D	teletext timing chain for USA 525 line system (USTIC); 40 characters per row, 24 rows (8 TV lines per row)
SAA5030	teletext video processor
SAA5040A	teletext acquisition and control circuit; giving boxed status information for display
SAA5040B	teletext acquisition and control circuit; without status box
SAA5040C	teletext acquisition and control circuit; giving different boxed status information for display
SAA5041	teletext acquisition and control circuit; different remote control commands
SAA5042	teletext acquisition and control circuit; different remote control commands
SAA5043	teletext acquisition and control circuit; different boxed status information for display
SAA5045	gearing and address logic array (GALA) for USA teletext; 525 line system
SAA5050	teletext character generator (English)
SAA5051	teletext character generator (German)
SAA5052	teletext character generator (Swedish)
SAA5053	teletext character generator (Italian)
SAA5054	teletext character generator (Belgian)
SAA5055	teletext character generator (US ASCII)
SAA5056	teletext character generator (Hebrew)
SAA5057	teletext character generator (Cyrillic)
SAA5058	teletext character generator (African)
SAA5070	peripheral IC for viewdata (LUCY); $\mu$ C controlled
SAA5230	teletext video processor
SAA9010	picture enhancement processor
SAA9020	field memory controller
SAB3034	analogue and timing circuit (A & T)
SAF3019	clock/timer with serial I/O; $\mu$ C controlled
TDA2502	tacho motor speed controller
TDA2503	track sensing amplifier for VCR
TDA3540; Q	IF amplifier and demodulator; npn tuners
TDA3541; Q	IF amplifier and demodulator; pnp tuners
TDA3571B	sync combination with transmitter identification
TDA3576B	sync combination with transmitter identification

# MAINTENANCE TYPE LIST

TDA3590	SECAM processor circuit	(successor TDA3590A)
TDA3591	SECAM processor circuit	(successor TDA3591A)
TDA3650	vertical deflection circuit	
TDA3701	PAL sync processor for VCR	
TDA3710	chrominance signal/mixer for VCR	
TDA3720	SECAM processor for VCR	(successor TDA3725)
TEA1002	PAL colour encoder and video summer	(successor TEA2000)



**GENERAL**  
**Type designation**  
**Rating systems**  
**Handling MOS devices**



PRO ELECTRON TYPE DESIGNATION CODE  
FOR INTEGRATED CIRCUITS

This type nomenclature applies to semiconductor monolithic, semiconductor multi-chip, thin-film, thick-film and hybrid integrated circuits.

A basic type number consists of:

*THREE LETTERS FOLLOWED BY A SERIAL NUMBER*

**FIRST AND SECOND LETTER****1. DIGITAL FAMILY CIRCUITS**

The **FIRST TWO LETTERS** identify the **FAMILY** (see note 1).

**2. SOLITARY CIRCUITS**

The **FIRST LETTER** divides the solitary circuits into:

- S : Solitary digital circuits
- T : Analogue circuits
- U : Mixed analogue/digital circuits

The **SECOND LETTER** is a serial letter without any further significance except 'H' which stands for hybrid circuits (see note 3).

**3. MICROPROCESSORS**

The **FIRST TWO LETTERS** identify microprocessors and correlated circuits as follows:

- MA : { Microcomputer  
Central processing unit
- MB : Slice processor (see note 2)
- MD : Correlated memories
- ME : Other correlated circuits (interface, clock, peripheral controller, etc.)

**4. CHARGE-TRANSFER DEVICES AND SWITCHED CAPACITORS**

The **FIRST TWO LETTERS** identify the following:

- NH : Hybrid circuits
- NL : Logic circuits
- NM : Memories
- NS : Analogue signal processing, using switched capacitors
- NT : Analogue signal processing, using CTDs
- NX : Imaging devices
- NY : Other correlated circuits

**Notes**

1. A logic family is an assembly of digital circuits designed to be interconnected and defined by its basic electrical characteristics (such as: supply voltage, power consumption, propagation delay, noise immunity).
2. By 'slice processor' is meant: a functional slice of microprocessor.
3. The first letter 'S' should be used for all solitary memories, to which, in the event of hybrids, the second letter 'H' should be added (e.g. SH for Bubble-memories).

### THIRD LETTER

It indicates the operating ambient temperature range.  
The letters A to G give information about the temperature:

- A : temperature range not specified
- B : 0 to + 70 °C
- C : -55 to + 125 °C
- D : -25 to + 70 °C
- E : -25 to + 85 °C
- F : -40 to + 85 °C
- G : -55 to + 85 °C

If a circuit is published for another temperature range, the letter indicating a narrower temperature range may be used or the letter 'A'.

Example: the range 0 to + 75 °C can be indicated by 'B' or 'A'.

### SERIAL NUMBER

This may be either a 4-digit number assigned by Pro Electron, or the serial number (which may be a combination of figures and letters) of an existing company type designation of the manufacturer.

To the basic type number may be added:

#### A VERSION LETTER

Indicates a minor variant of the basic type or the package. Except for 'Z', which means customized wiring, the letter has no fixed meaning. The following letters are recommended for package variants:

- C : for cylindrical
- D : for ceramic DIL
- F : for flat pack
- L : for chip on tape
- P : for plastic DIL
- Q : for QIL
- T : for miniature plastic (mini-pack)
- U : for uncased chip

Alternatively a TWO LETTER SUFFIX may be used instead of a single package version letter, if the manufacturer (sponsor) wishes to give more information.

#### FIRST LETTER: General shape

- C : Cylindrical
- D : Dual-in-line (DIL)
- E : Power DIL (with external heatsink)
- F : Flat (leads on 2 sides)
- G : Flat (leads on 4 sides)
- K : Diamond (TO-3 family)
- M : Multiple-in-line (except Dual-, Triple-, Quadruple-in-line)
- Q : Quadruple-in-line (QIL)
- R : Power QIL (with external heatsink)
- S : Single-in-line
- T : Triple-in-line
- W : Lead chip-carrier (LCC)
- X : Leadless chip-carrier (LLCC)
- Y : Pin grid array (PGA)

#### SECOND LETTER: Material

- C : Metal-ceramic
- G : Glass-ceramic (cerdip)
- M : Metal
- P : Plastic

A hyphen precedes the suffix to avoid confusion with a version letter.

## RATING SYSTEMS

The rating systems described are those recommended by the International Electrotechnical Commission (IEC) in its Publication 134.

### DEFINITIONS OF TERMS USED

*Electronic device.* An electronic tube or valve, transistor or other semiconductor device.

#### Note

This definition excludes inductors, capacitors, resistors and similar components.

*Characteristic.* A characteristic is an inherent and measurable property of a device. Such a property may be electrical, mechanical, thermal, hydraulic, electro-magnetic, or nuclear, and can be expressed as a value for stated or recognized conditions. A characteristic may also be a set of related values, usually shown in graphical form.

*Bogey electronic device.* An electronic device whose characteristics have the published nominal values for the type. A bogey electronic device for any particular application can be obtained by considering only those characteristics which are directly related to the application.

*Rating.* A value which establishes either a limiting capability or a limiting condition for an electronic device. It is determined for specified values of environment and operation, and may be stated in any suitable terms.

#### Note

Limiting conditions may be either maxima or minima.

*Rating system.* The set of principles upon which ratings are established and which determine their interpretation.

#### Note

The rating system indicates the division of responsibility between the device manufacturer and the circuit designer, with the object of ensuring that the working conditions do not exceed the ratings.

### ABSOLUTE MAXIMUM RATING SYSTEM

Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, which should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout life, no absolute maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply voltage variation, equipment component variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.

### DESIGN MAXIMUM RATING SYSTEM

Design maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in the characteristics of the electronic device under consideration.

The equipment manufacturer should design so that, initially and throughout life, no design maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply voltage variation, equipment component variation, variation in characteristics of all other devices in the equipment, equipment control adjustment, load variation, signal variation and environmental conditions.

### DESIGN CENTRE RATING SYSTEM

Design centre ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under normal conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device in average applications, taking responsibility for normal changes in operating conditions due to rated supply voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all electronic devices.

The equipment manufacturer should design so that, initially, no design centre value for the intended service is exceeded with a bogey electronic device in equipment operating at the stated normal supply voltage.

## HANDLING MOS DEVICES

Though all our MOS integrated circuits incorporate protection against electrostatic discharges, they can nevertheless be damaged by accidental over-voltages. In storing and handling them, the following precautions are recommended.

### *Caution*

Testing or handling and mounting call for special attention to personal safety. Personnel handling MOS devices should normally be connected to ground via a resistor.

### **Storage and transport**

Store and transport the circuits in their original packing. Alternatively, use may be made of a conductive material or special IC carrier that either short-circuits all leads or insulates them from external contact.

### **Testing or handling**

Work on a conductive surface (e.g. metal table top) when testing the circuits or transferring them from one carrier to another. Electrically connect the person doing the testing or handling to the conductive surface, for example by a metal bracelet and a conductive cord or chain. Connect all testing and handling equipment to the same surface.

Signals should not be applied to the inputs while the device power supply is off. All unused input leads should be connected to either the supply voltage or ground.

### **Mounting**

Mount MOS integrated circuits on printed circuit boards *after* all other components have been mounted. Take care that the circuits themselves, metal parts of the board, mounting tools, and the person doing the mounting are kept at the same electric (ground) potential. If it is impossible to ground the printed-circuit board the person mounting the circuits should touch the board before bringing MOS circuits into contact with it.

### **Soldering**

Soldering iron tips, including those of low-voltage irons, or soldering baths should also be kept at the same potential as the MOS circuits and the board.

### **Static charges**

Dress personnel in clothing of non-electrostatic material (no wool, silk or synthetic fibres). After the MOS circuits have been mounted on the board proper handling precautions should still be observed. Until the sub-assemblies are inserted into a complete system in which the proper voltages are supplied, the board is no more than an extension of the leads of the devices mounted on the board. To prevent static charges from being transmitted through the board wiring to the device it is recommended that conductive clips or conductive tape be put on the circuit board terminals.

### **Transient voltages**

To prevent permanent damage due to transient voltages, do not insert or remove MOS devices, or printed-circuit boards with MOS devices, from test sockets or systems with power on.

### **Voltage surges**

Beware of voltage surges due to switching electrical equipment on or off, relays and d.c. lines.





DEVICE DATA



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA1534

## 14-BIT ANALOGUE TO DIGITAL CONVERTER (ADC)

An integrated 14-bit analogue to digital converter (ADC) which uses the successive approximation conversion technique and includes the comparator, reference source and clock on the same chip. The high linearity makes it very suitable for signal processing while the accurate, temperature-compensated reference source makes it applicable for instrumentation purposes.

The ADC accepts unipolar or bipolar input signals.

Digital output data is in serial form.

All digital outputs are fully TTL compatible.

### QUICK REFERENCE DATA

Positive supply voltage (pin 5)	$V_p$	typ.	5 V
Negative supply voltage 1 (pin 6)	$-V_{N1}$	typ.	5 V
Negative supply voltage 2 (pin 9)	$-V_{N2}$	typ.	17 V
Signal-to-noise ratio	S/N	typ.	84 dB
Linearity error		typ.	$\pm \frac{1}{2}$ LSB
Total power dissipation	$P_{tot}$	typ.	500 mW
Operating ambient temperature range	$T_{amb}$	-20 to +70	°C
Storage temperature range	$T_{stg}$	-55 to +150	°C
Resolution			14 bits
Full scale input current	$I_{FS}$	typ.	4 mA

### PACKAGE OUTLINE

28-lead dual in-line; plastic (with internal heat spreader) (SOT-117).

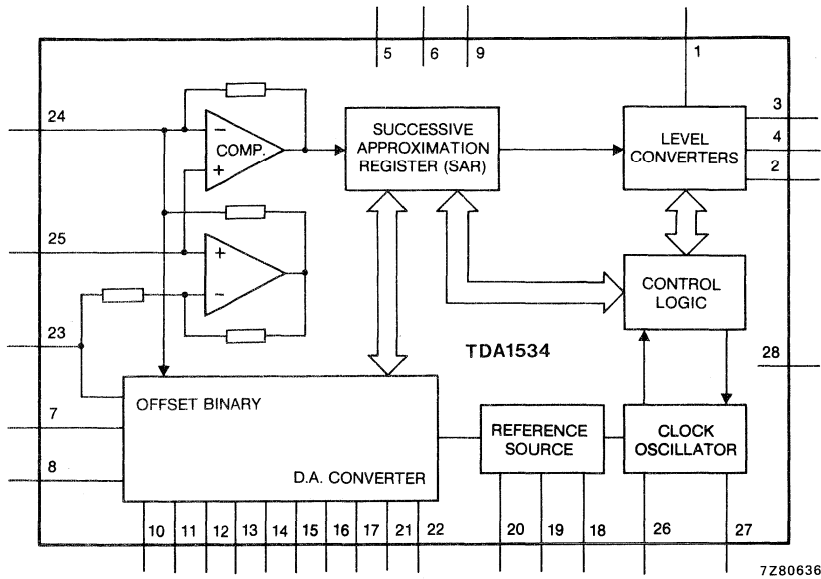


Fig. 1 Block diagram.

**PIN DESIGNATION**

1	start conversion	15	decoupling binary
2	status out	16	weighted
3	data out	17	current sources
4	data strobe	18	$I_{ref1}$
5	positive supply voltage	19	$I_{ref2}$
6	negative supply voltage 1	20	$I_{ref3}$
7	oscillator input	21	decoupling binary
8	oscillator input	22	weighted current sources
9	negative supply voltage 2	23	offset binary input
10	decoupling binary	24	analogue signal input
11		25	analogue ground
12		26	oscillator
13	weighted current sources	27	oscillator
14		28	digital ground

## FUNCTIONAL DESCRIPTION

The circuit consists of the following parts:

### 14-bit D/A converter

Using "dynamic element matching", which results in high accuracy, linearity and longterm stability, without the need of trimming. The main parts of the DAC are the binary weighted current sources and the bit switches. The DAC also delivers an offset binary current for bipolar operation of the ADC.

### Fast settling comparator/subtractor

Consisting of a high speed, clamped operational amplifier with special frequency compensation system.

### Successive approximation register (SAR)

This register is an array of fourteen addressable latches, with the outputs connected to the bit switches of the D/A converter.

### Logic-level converters

Converting the internally used current-mode-logic (CML) levels to TTL levels, for easy interface of the ADC with standard logic families.

### Clock oscillator and control logic

Delivering the pulses and timing for the SAR and takes care of the communication with the peripheral circuits.

### Reference source

Based on the bandgap voltage of silicon, with extra temperature compensation circuit.

For the timing of the output signals see Fig. 3. At the leading edge of the start conversion (SC) pulse the ADC starts converting the input voltage. During the conversion cycle the following signals appear at the output pins:

#### Status (pin 2)

This signal can be used to force the Sample-Hold-Circuit, in front of the ADC, in hold mode.

#### Data strobe (pin 4)

This signal is used to clock the data-out signal into the peripheral devices.

#### Data out (pin 3)

The 14 bits serial, binary, output code of the A/D converter starting with the most significant bit (MSB). The data must be considered valid at the trailing edge of the data-strobe signal.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Positive supply (pin 5)	$V_P$	0 to 7 V
Negative supply voltage (pin 6)	$-V_{N1}$	0 to 7 V
Negative supply voltage (pin 9)	$-V_{N2}$	0 to 20 V
Storage temperature	$T_{stg}$	-55 to + 150 °C
Operating ambient temperature range	$T_{amb}$	-20 to + 70 °C
Total power dissipation	$P_{tot}$	derating curve (Fig. 2)

**CHARACTERISTICS** (see application circuit Fig. 4) $V_P = 5\text{ V}$ ;  $-V_{N1} = 5\text{ V}$ ;  $-V_{N2} = 17\text{ V}$ ;  $T_{amb} = + 25\text{ °C}$ , unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
Positive supply voltage (pin 5)	$V_P$	4	5	6	V
Negative supply voltage 1 (pin 6)	$-V_{N1}$	—	5	—	V
Negative supply voltage 2 (pin 9)	$-V_{N2}$	16,5	17	18	V
Positive supply current	$I_P$	—	30	40	mA
Negative supply current	$-I_{N1}$	—	37	45	mA
Negative supply current	$-I_{N2}$	—	10	13	mA
Total power dissipation	$P_{tot}$	—	500	—	mW
Resolution		—	14	—	bits
<b>Analogue input</b>					
Full scale input current offset-binary current switched off	$I_{FS}$	3,8	4,0	4,2	mA
Temperature coefficient pin 23 short-circuited	TC	—	t.b.f.	—	$10^{-6}/K$
<b>Zero-offset</b> offset-binary current switched off					
Offset voltage	$-V_o$	10	20	30	mV
Temperature coefficient	TC	—	t.b.f.	—	$\mu V/K$
Offset current	$I_o$	—	500	—	nA
Temperature coefficient	TC	—	t.b.f.	—	nA/K
<b>Linearity</b>					
Linearity error		—	$\pm 1/4$	—	LSB
Linearity from -20 to + 70 °C		—	$\pm 1/2$	—	LSB
Offset binary current	$I_{BO}$	$0,45 \cdot I_{FS}$	$0,50 \cdot I_{FS}$	$0,55 \cdot I_{FS}$	mA
Temperature coefficient	TC	—	t.b.f.	—	$10^{-6}/K$
Signal to noise ratio*	S/N	80	84	—	dB

parameter	symbol	min.	typ.	max.	unit
<b>Start conversion (pin 1)</b>					
Input current					
$V_{IL} (< 0,8 \text{ V})$	$-I_1$	—	—	1,6	mA
$V_{IH} (> 2,0 \text{ V})$	$I_1$	—	—	40	$\mu\text{A}$
<b>Data, strobe, status (pins 3, 4 and 2)</b>					
Output current					
$V_{OL} (< 0,6 \text{ V})$	$I_{3, 4, 2}$	6,4	16	—	mA
$V_{OH} (> 2,4 \text{ V})$	$-I_{3, 4, 2}$	160	400	—	$\mu\text{A}$
Conversion time					
$C_{26-27} = 220 \text{ pF} \pm 1\%$	$t_C$	—	8,5	—	$\mu\text{s}$
Signal width (pin 1)					
start conversion	$t_{SC}$	0,2	—	$t_C$	$\mu\text{s}$
Delay time (pin 2)					
status out	$t_{SD}$	—	60	—	ns
Set-up time (pin 3)					
data out	$t_{DS}$	—	25	—	ns
Pulse duration (pin 4)					
data strobe high	$t_{DSH}$	—	125	—	ns

DEVELOPMENT DATA

\* Signal-to-noise ratio within 10 Hz and 20 kHz bandwidth of a 1 kHz full scale sinewave, generated at a sample rate of 44 kHz.

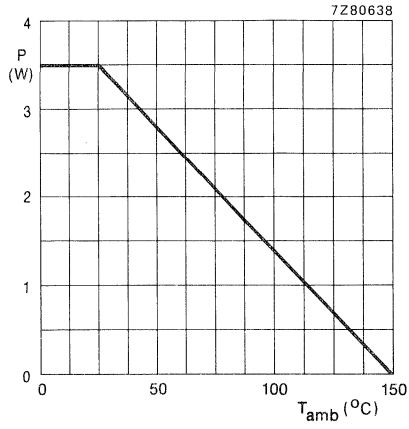


Fig. 2 Power derating curve.

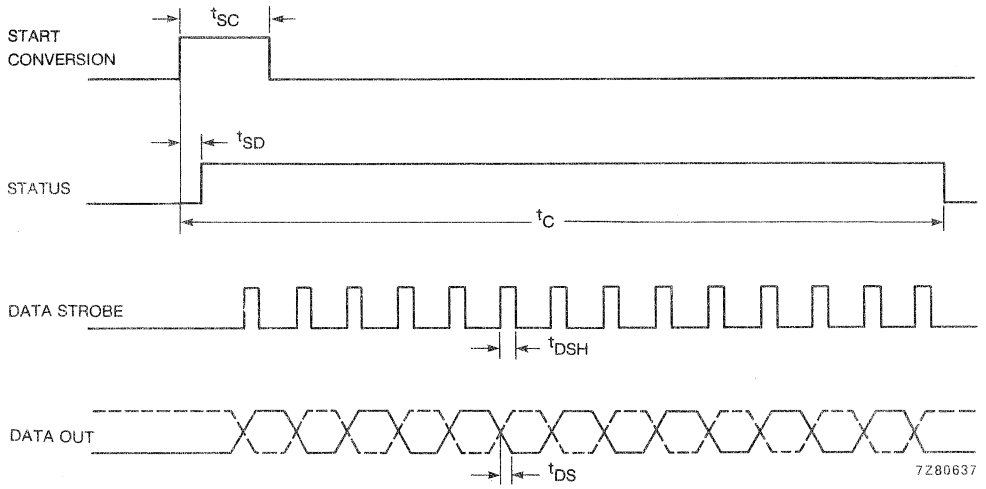


Fig. 3 Switching times waveforms.



DEVELOPMENT DATA

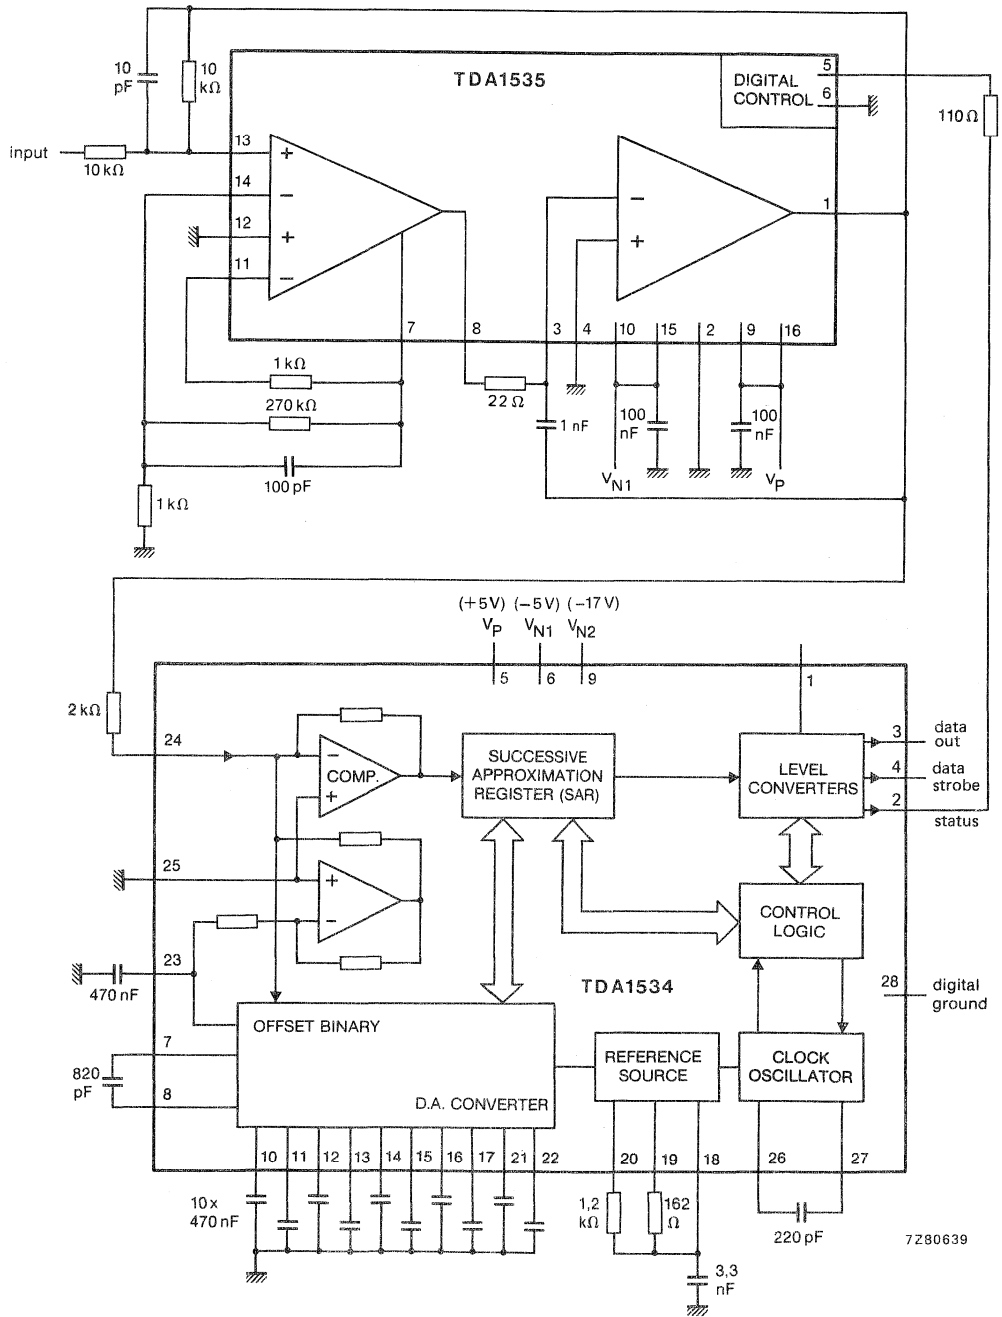


Fig. 4 Application and test circuit.

All earthed components connected to analogue ground (pin 25).



## 14-BIT DAC WITH 85 dB S/N RATIO

## GENERAL DESCRIPTION

The TDA1540 is a monolithic integrated 14-bit digital to analogue converter (DAC). It incorporates a 14-bit input shift register with output latches, binary weighted current sources with switches and a reference source.

The IC features an improved switch circuitry which eliminates the need for a deglitcher circuit at the output. This results in a signal-to-noise ratio of typical 85 dB in the audio band.

## QUICK REFERENCE DATA

Supply voltages			
pin 4	$V_{P1}$	typ.	5 V
pin 7	$V_{N1}$	typ.	-5 V
pin 11	$V_{N2}$	typ.	-17 V
Signal-to-noise ratio (full scale sine-wave) at analogue output (pin 22)	S/N	typ.	85 dB
Non-linearity at $T_{amb} = -20$ to $+70$ °C		typ.	$\frac{1}{2}$ LSB
Current settling time	$t_{cs}$	typ.	0,5 $\mu$ s
Maximum input bit rate at data input (pin 1)	$BR_{max}$	min.	12 Mbit/s
Maximum clock frequency at clock input (pin 28)	$f_{cl max}$	min.	12 MHz
Full scale temperature coefficient at analogue output (pin 22)	$TC_{FS}$	typ.	$\pm 30 \cdot 10^{-6} K^{-1}$
Operating ambient temperature range	$T_{amb}$		-20 to $+70$ °C
Total power dissipation	$P_{tot}$	typ.	350 mW

## PACKAGE OUTLINE

TDA1540P: 28-lead DIL; plastic (SOT-117).

**FUNCTIONAL DESCRIPTION**

The binary weighted current sources are obtained by a combination of a passive divider and a time division concept. Figure 1a gives the diagram of one divider stage. The total emitter current  $4I$  of the passive divider is divided into four more or less equal output currents.

The output currents of the passive divider are now interchanged during equal time intervals generated by means of a shift register. The average output currents are exactly equal as a result of this operation. A ripple on the output current, caused by a mismatch of the passive divider, is filtered by an a.c. low-pass filter, requiring an external filter capacitor.

The outputs of the dividers are combined to obtain the output currents  $I(\bar{I}_1)$ ,  $I(\bar{I}_2)$  and  $2I(\bar{I}_3)$  (see Fig. 1b). The current of the most significant bit is generated by an on-chip reference source. A binary weighted current network is formed by cascading the current division stages (see Fig. 2).

The interchanging pulses are generated by an on-chip oscillator and a 4-bit shift register. The binary currents are switched to the current output (pin 22) via diode-transistor switching stages; therefore, the voltage on the output pin must be  $0\text{ V} \pm 10\text{ mV}$ . The output current can be converted into a voltage by means of a summing amplifier.

Figure 3 represents the data input format, and an application circuit is given in Fig. 4.


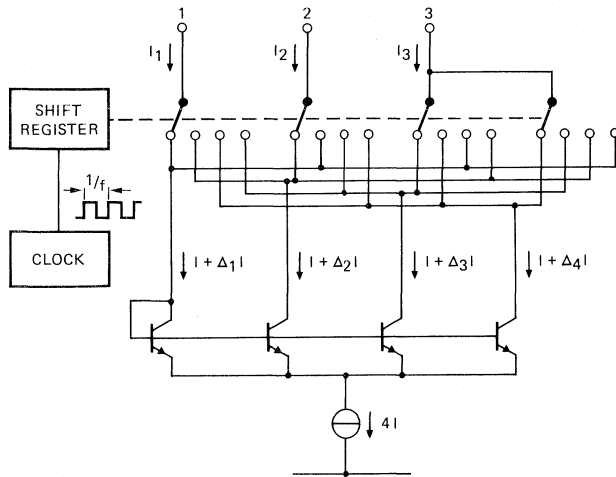


Fig. 1a Circuit diagram of one divider stage.

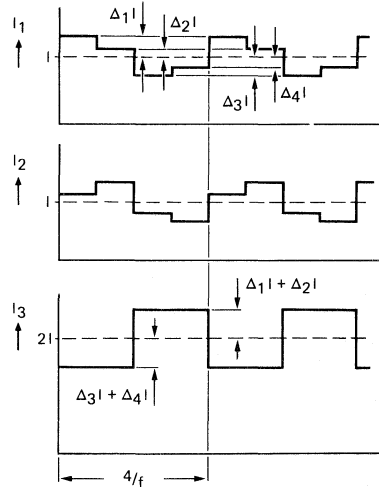

7Z89039

Fig. 1b Waveforms showing output currents  $I_1$ ,  $I_2$  and  $I_3$  of Fig. 1a.

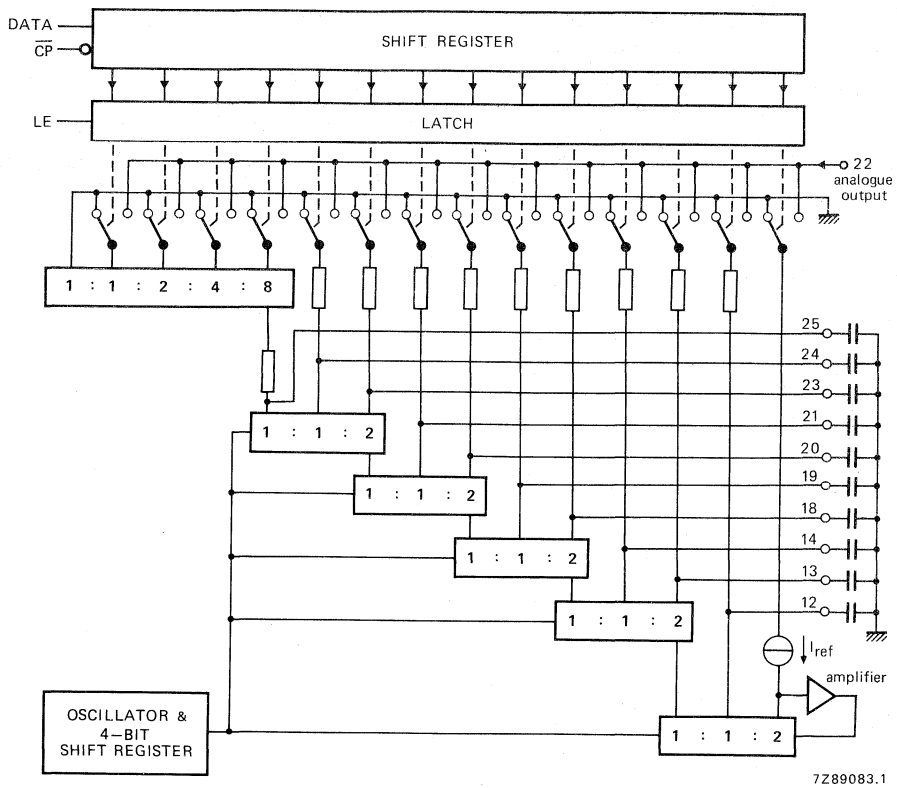


Fig. 2 Functional diagram showing cascading of current division stages.

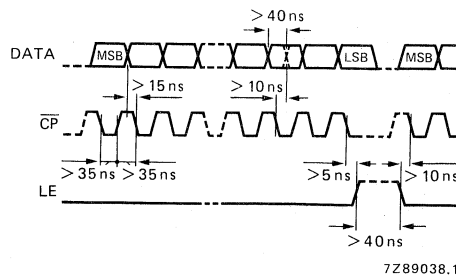


Fig. 3 Format of input signals.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

## Supply voltages

with respect to GND (pin 6)

at pin 4

V<sub>P1</sub> max. 12 V

at pin 7

V<sub>N1</sub> max. -12 V

at pin 11

V<sub>N2</sub> max. -20 V

at pin 4 with respect to pin 11

V<sub>P1</sub>-V<sub>N2</sub> max. 32 V

at pin 7 with respect to pin 11

V<sub>N1</sub>-V<sub>N2</sub> -1 to +20 V

## Total power dissipation

P<sub>tot</sub> max. 600 mW

## Storage temperature range

T<sub>stg</sub> -55 to +125 °C

## Operating ambient temperature range


T<sub>amb</sub> -25 to +80 °C**CHARACTERISTICS** (see application circuit Fig. 4)T<sub>amb</sub> = 25 °C; at typical supply voltages; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply voltages</b>					
with respect to GND (pin 6)					
at pin 4	V <sub>P1</sub>	3	5	7	V
at pin 7	V <sub>N1</sub>	-4,7	-5	-7	V
at pin 11	V <sub>N2</sub>	-16,5	-17	-18	V
<b>Supply currents</b>					
at pin 4*	I <sub>P1</sub>	-	12	14	mA
at pin 7	I <sub>N1</sub>	-	-20	-24	mA
at pin 11	I <sub>N2</sub>	-	-11	-13	mA
<b>Power dissipation</b>					
Total power dissipation	P <sub>tot</sub>	-	350	410	mW
<b>Temperature</b>					
Operating ambient temperature range	T <sub>amb</sub>	-20	-	+70	°C

\* When the output current is  $\frac{1}{2}I_{FS}$  ( $\frac{1}{2}$  full scale output current).

parameter	symbol	min.	typ.	max.	unit
<b>Data input DATA (pin 1)</b>					
Input voltage HIGH	$V_{IH}$	2,0	—	7,0	V
Input voltage LOW	$V_{IL}$	0	—	0,8	V
Input current HIGH at $V_{IH}$	$I_{IH}$	—	—	50	$\mu A$
Input current LOW at $V_{IL}$	$-I_{IL}$	—	—	0,2	mA
Maximum input bit rate	$BR_{max}$	12	—	—	Mbits/s
<b>Latch enable input LE (pin 2)</b>					
<b>Clock input <math>\overline{CP}</math> (pin 28)</b>					
Input voltage HIGH	$V_{IH}$	2,0	—	7,0	V
Input voltage LOW	$V_{IL}$	0	—	0,8	V
Input current HIGH at $V_{IH}$	$I_{IH}$	—	—	50	$\mu A$
Input current LOW at $V_{IL}$	$-I_{IL}$	—	—	0,2	mA
Maximum clock frequency	$f_{CPmax}$	12	—	—	MHz
<b>Oscillator (pins 8 and 9)</b>					
Oscillator frequency at $C_{g,9} = 820$ pF	$f_{osc}$	100	160	200	kHz
<b>Analogue output <math>I_{out}</math> (pin 22)</b>					
Output voltage compliance	$V_{OC}$	-10	—	+ 10	mV
Full scale current	$I_{FS}$	3,8	4,0	4,2	mA
Zero scale current	$\pm I_{ZS}$	—	—	100	nA
Full scale temperature coefficient $T_{amb} = -20$ to $+70$ °C	$TC_{FS}$	—	$\pm 30 \times 10^{-6}$	—	$K^{-1}$
Settling time to $\pm \frac{1}{2}LSB$ all bits on or off	$t_{cs}$	—	0,5	—	$\mu s$
Signal-to-noise ratio*	S/N	80	85	—	dB

\* Signal-to-noise ratio within 20 Hz and 20 kHz of a 1 kHz full scale sinewave, generated at a sample rate of 44 kHz.

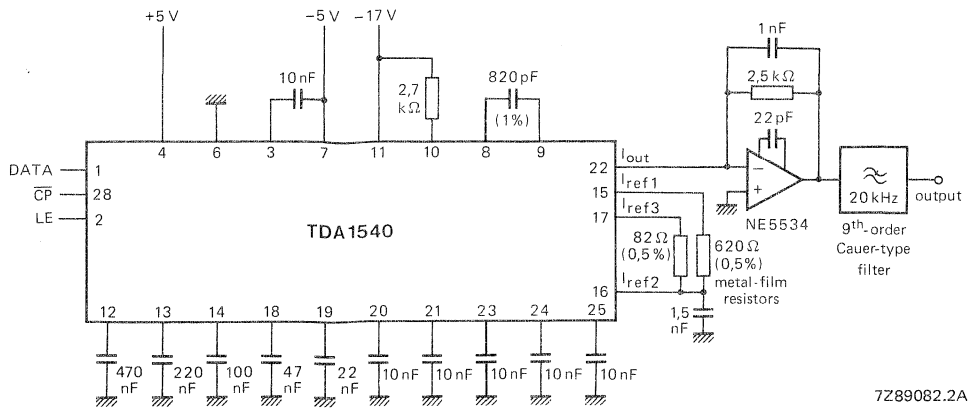


7Z89082.2A

Fig. 4 Application circuit.

**PINNING**

- |    |                   |                              |                    |
|----|-------------------|------------------------------|--------------------|
| 1  | DATA              | data input                   |                    |
| 2  | LE                | latch enable input           |                    |
| 3  | V <sub>ref1</sub> | voltage reference            |                    |
| 4  | V <sub>p1</sub>   | positive supply              |                    |
| 5  | i.c.*             | frequency compensation       |                    |
| 6  | GND               | ground                       |                    |
| 7  | V <sub>N1</sub>   | negative supply              |                    |
| 8  | OSC1              | } oscillator capacitor       |                    |
| 9  | OSC2              |                              |                    |
| 10 | V <sub>ref2</sub> | voltage reference            |                    |
| 11 | V <sub>N2</sub>   | negative supply              |                    |
| 12 | C1                | } decoupling binary          |                    |
| 13 | C2                |                              | } weighted current |
| 14 | C3                |                              |                    |
| 15 | I <sub>ref1</sub> | } current reference sources  |                    |
| 16 | I <sub>ref2</sub> |                              |                    |
| 17 | I <sub>ref3</sub> |                              |                    |
| 18 | C4                | } decoupling binary weighted |                    |
| 19 | C5                |                              | } current sources  |
| 20 | C6                |                              |                    |
| 21 | C7                |                              |                    |
| 22 | I <sub>out</sub>  | analogue output              |                    |
| 23 | C8                | } decoupling binary          |                    |
| 24 | C9                |                              | } weighted current |
| 25 | C10               | } sources                    |                    |
| 26 | i.c.*             |                              | voltage reference  |
| 27 | i.c.*             | voltage reference            |                    |
| 28 | CP                | clock pulse input            |                    |

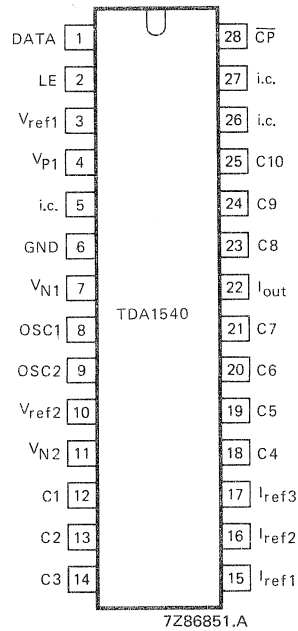

7Z86851.A

Fig. 5 Pinning diagram.

\* i.c.: internally connected.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA1541A

## DUAL 16-BIT DAC

### GENERAL DESCRIPTION

The TDA1541A is a monolithic integrated dual 16-bit digital-to-analogue converter (DAC) designed for use in hi-fi digital audio equipment such as Compact Disc players, digital tape or cassette recorders.

### Features


- Selectable two-channel input format: offset binary or two's complement
- Internal timing and control circuit
- TTL compatible digital inputs
- High maximum input bit-rate and fast settling time
- No requirement for external deglitcher circuitry

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltages					
pin 28	$V_{DD}$	4,5	5,0	5,5	V
pin 26	$-V_{DD1}$	4,5	5,0	5,5	V
pin 15	$-V_{DD2}$	14,0	15,0	16,0	V
Supply currents					
pin 28	$I_{DD}$	—	27	40	mA
pin 26	$-I_{DD1}$	—	37	50	mA
pin 15	$-I_{DD2}$	—	25	35	mA
Signal-to-noise ratio (including THD) (full-scale sinewave)					
at analogue outputs (AOL; AOR)	$S/(N + D)$	90	95	—	dB
Non-linearity at $T_{amb} = -20$ to $+85$ °C	NL	—	0,5	1,0	LSB
Current settling time to $\pm 1$ LSB	$t_{cs}$	—	0,5	—	$\mu s$
Input bit rate at data input (pins 3 and 4)	BR	—	—	6,4	Mbits/s
Clock frequency at clock input (pin 2)	$f_{BCK}$	—	—	6,4	MHz
Full scale temperature coefficient at analogue outputs (AOL; AOR)	$TC_{FS}$	—	$\pm 200 \times 10^{-6}$	—	$K^{-1}$
Operating ambient temperature range	$T_{amb}$	-40	—	+85	°C
Total power dissipation	$P_{tot}$	—	700	—	mW

### PACKAGE OUTLINE

28-lead DIL; plastic with internal heat spreader (SOT-117).

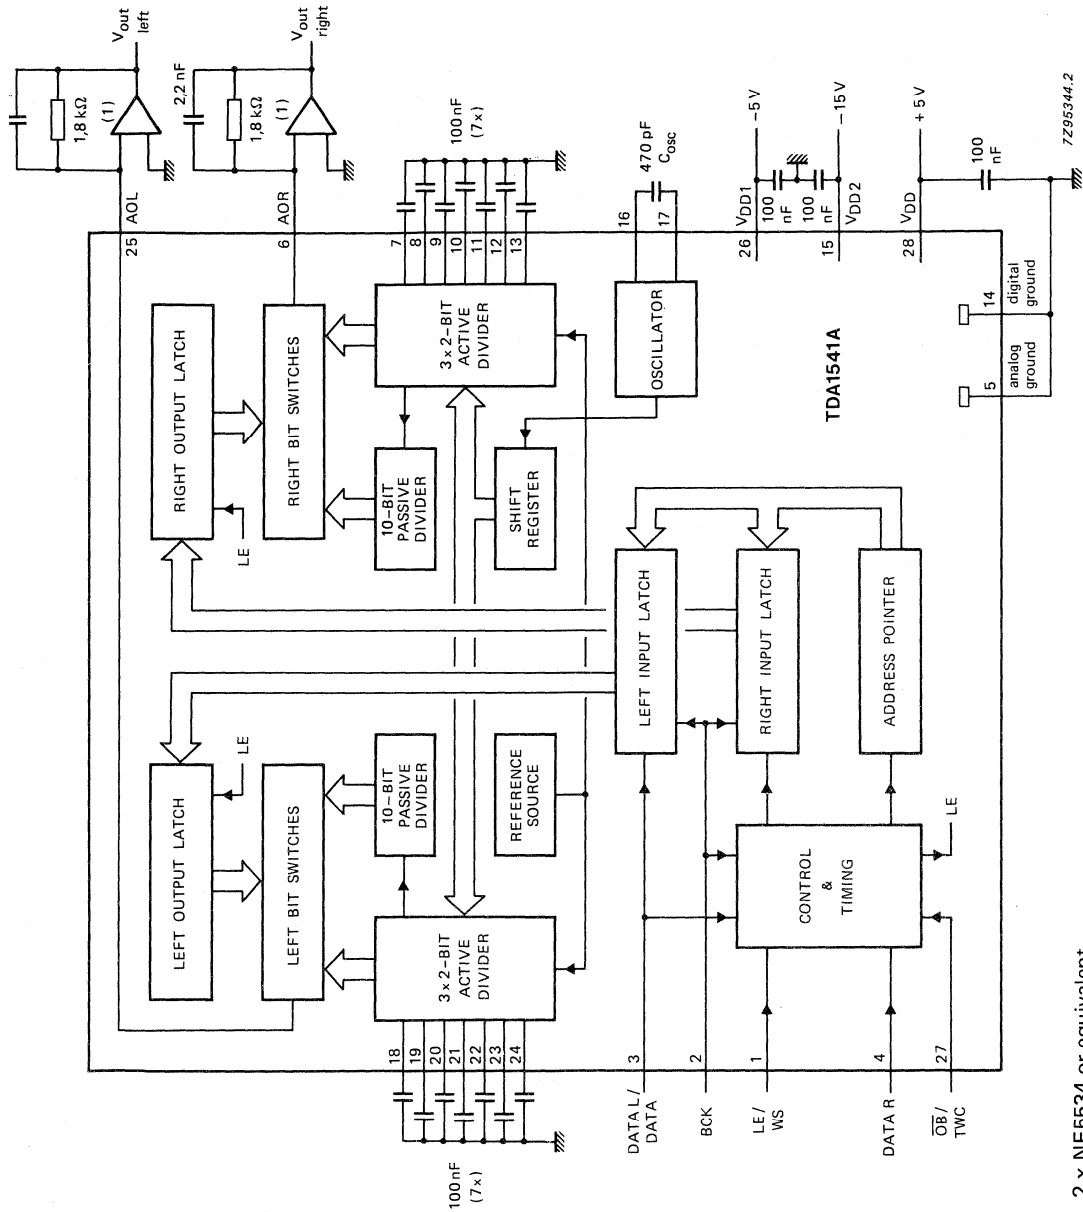

(1) TDA1542, 2 x NE5534 or equivalent.

Fig. 1 Block diagram.

DEVELOPMENT DATA

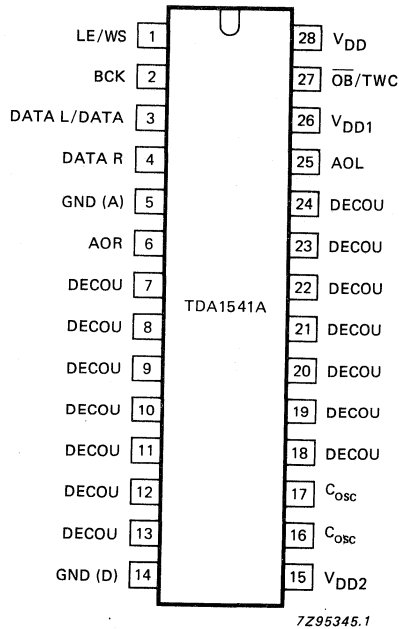


Fig. 2 Pinning diagram.

## PINNING

1	LE/WS*	latch enable input word select input
2	BCK*	bit clock input
3	DATA L/DATA*	data left channel input data input (selected format)
4	DATA R*	data right channel input
5	GND (A)	analogue ground
6	AOR	right channel output
7	DECOU	} decoupling
8	DECOU	
9	DECOU	
10	DECOU	
11	DECOU	
12	DECOU	
13	DECOU	
14	GND (D)	digital ground
15	V <sub>DD2</sub>	-15 V supply voltage
16	C <sub>OSC</sub>	} oscillator
17	C <sub>OSC</sub>	
18	DECOU	} decoupling
19	DECOU	
20	DECOU	
21	DECOU	
22	DECOU	
23	DECOU	
24	DECOU	
25	AOL	left channel output
26	V <sub>DD1</sub>	-5 V supply voltage
27	$\overline{\text{OB}}/\text{TWC}^*$	mode selection input
28	V <sub>DD</sub>	+5 V supply voltage

\* See Table 1 data selection input.

## FUNCTIONAL DESCRIPTION

The TDA1541A accepts input sample formats in time multiplexed mode or simultaneous mode with any bit length. The most significant bit (MSB) must always be first.

This flexible input data format allows easy interfacing with signal processing chips such as interpolation filters, error correction circuits, pulse code modulation adaptors and audio signal processors (ASP).

The high maximum input bit-rate and fast settling time facilitates application in 4 x oversampling systems (44,1 kHz to 176,4 kHz or 48 kHz to 192 kHz) with the associated simple analogue filtering function (low order, linear phase filter).

### Input data selection (see also Table 1)

With input  $\overline{OB}/TWC$  connected to ground, data input (offset binary format) must be in time multiplexed mode. It is accompanied with a word select (WS) and a bit clock input (BCK) signal. The converted samples appear at the output, at the first positive going transition of the bit clock signal after a negative going transition of the word select signal.

With  $\overline{OB}/TWC$  connected to  $V_{DD}$  the mode is the same but the data format must be in two's complement.

When input  $\overline{OB}/TWC$  is connected to  $V_{DD1}$  the two channels of data (L/R) are input simultaneously via DATA L and DATA R, accompanied with BCK and a latch-enable input (LE). With this mode selected the data must be in offset binary. The converted samples appear at the output at the positive going transition of the latch enable signal.

The format of data input signals is shown in figures 3 and 4.

True 16-bit performance is achieved by each channel using three 2-bit active dividers, operating on the dynamic element matching principle, in combination with a 10-bit passive current-divider, based on emitter scaling.

All digital inputs are TTL compatible.

**Table 1** Input data selection

$\overline{OB}/TWC$	mode	pin 1	pin 2	pin 3	pin 4
-5 V	simultaneous	LE	BCK	DATA L	DATA R
0 V	time MUX OB	WS	BCK	DATA OB	not used
+ 5 V	time MUX TWC	WS	BCK	DATA TWC	not used

Where:

LE = latch enable

WS = word select, LOW = left channel; HIGH = right channel

BCK = bit clock

DATA L = data left

DATA R = data right

DATA OB = data offset binary

DATA TWC = data two's complement

MUX OB = multiplexed offset binary

MUX TWC = multiplexed two's complement = I<sup>2</sup>S – format.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage ranges				
pin 28	$V_{DD}$	0	7	V
pin 26	$-V_{DD1}$	0	7	V
pin 15	$-V_{DD2}$	0	17	V
Storage temperature range	$T_{stg}$	-65	+ 150	°C
Operating ambient temperature range	$T_{amb}$	-40	+ 85	°C
Electrostatic handling*	$V_{es}$	-1000	+ 1000	V

**THERMAL RESISTANCE**

From junction to ambient

 $R_{thj-a}$  30 K/W

DEVELOPMENT DATA

\* Equivalent to discharging a 250 pF capacitor through a 1 k $\Omega$  series resistor.

## CHARACTERISTICS

$V_{DD} = 5\text{ V}$ ;  $-V_{DD1} = 5\text{ V}$ ;  $-V_{DD2} = 15\text{ V}$ ;  $T_{amb} = +25\text{ }^{\circ}\text{C}$ ; measured in the circuit of Fig. 1;  
unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage ranges						
pin 28		$V_{DD}$	4,5	5,0	5,5	V
pin 26		$-V_{DD1}$	4,5	5,0	5,5	V
pin 15		$-V_{DD2}$	14,0	15,0	16,0	V
Voltage difference between analogue and digital ground		$V_{GND(A)} - V_{GND(D)}$	-0,3	0	+0,3	V
<b>Supply currents</b>						
pin 28		$I_{DD}$	—	27	40	mA
pin 26		$-I_{DD1}$	—	37	50	mA
pin 15		$-I_{DD2}$	—	25	35	mA
<b>Inputs</b>						
Input current pins (1, 2, 3 and 4)						
digital inputs LOW	0,8 V	$-I_{IL}$	—	—	0,4	mA
digital inputs HIGH	2,0 V	$I_{IH}$	—	—	20	$\mu\text{A}$
Digital input current (pin 27)						
+5 V		$ I_{\overline{OB}}/TWC $	—	—	1	$\mu\text{A}$
0 V		$ I_{\overline{OB}}/TWC $	—	—	20	$\mu\text{A}$
-5 V		$ I_{\overline{OB}}/TWC $	—	—	40	$\mu\text{A}$
Input frequency/bit rate						
clock input pin 2		$f_{BCK}$	—	—	6,4	MHz
data inputs pins 3 and 4		$f_{DAT}$	—	—	6,4	Mbits/s
word select input pin 1		$f_{WS}$	—	—	200	kHz
latch enable pin 1		$f_{LE}$	—	—	200	kHz
Input capacitance of digital inputs		$C_I$	—	12	—	pF
<b>Oscillator (pins 16 and 17)</b>						
Oscillator frequency	$C_{osc} = 470\text{ pF}$	$f_{osc}$	150	200	275	kHz
<b>Analogue outputs (note 1) (AOL, AOR)</b>						
Resolution		Res	—	16	—	bits
Full scale current		$I_{FS}$	3,4	4,0	4,6	mA
Zero scale current		$ I_{ZS} $	—	25	50	nA
Full scale temperature coefficient	$T_{amb} = -20$ to $+85\text{ }^{\circ}\text{C}$	TCFS	—	$\pm 200$ $\times 10^{-6}$	—	$\text{K}^{-1}$

## CHARACTERISTICS (continued)

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Linearity error integral	$T_{amb} = 25\text{ }^{\circ}\text{C}$	$E_L$	—	0,5	1,0	LSB
	$T_{amb} = -20$ to $+85\text{ }^{\circ}\text{C}$	$E_L$	—	—	1,0	LSB
Linearity error differential	$T_{amb} = 25\text{ }^{\circ}\text{C}$	$E_{dL}$	—	0,5	1,0	LSB
	$T_{amb} = -20$ to $+85\text{ }^{\circ}\text{C}$	$E_{dL}$	—	—	1,0	LSB
Total harmonic distortion		THD	—	-100	—	dB
Signal-to-noise ratio (including THD)	note 2	$S/(N + D)$	90	95	—	dB
Settling time $\pm 1$ LSB		$t_{cs}$	—	0,5	—	$\mu\text{s}$
Channel separation		$\alpha$	90	98	—	dB
Unbalance between outputs		$ \Delta FS $	—	0,1	0,3	dB
Time delay between outputs		$t_d$	—	—	0,2	$\mu\text{s}$
Supply voltage ripple rejection	note 3 $V_{DD} = +5\text{ V}$ $V_{DD1} = -5\text{ V}$ $V_{DD2} = -15\text{ V}$	SVRR	—	-76	—	dB
		SVRR	—	-84	—	dB
		SVRR	—	-58	—	dB
Signal-to-noise ratio at bipolar zero at full scale		S/N	—	110	—	dB
		S/N	98	104	—	dB
<b>Timing</b>	Figs 3 and 4					
Rise time		$t_r$	—	—	32	ns
Fall time		$t_f$	—	—	32	ns
Bit clock cycle time		$t_{CY}$	156	—	—	ns
Bit clock HIGH time		$t_{HB}$	46	—	—	ns
Bit clock LOW time		$t_{LB}$	46	—	—	ns
Bit clock fall time to latch enable rise time		$t_{FBRL}$	0	—	—	ns
Bit clock rise time to latch enable fall time		$t_{RBFL}$	0	—	—	ns
Data set-up time		$t_{SU}; \text{DAT}$	32	—	—	ns
Data hold time to bit clock		$t_{HD}; \text{DAT}$	0	—	—	ns
Word select hold time		$t_{HD}; \text{WS}$	0	—	—	ns
Word select set-up time		$t_{SU}; \text{WS}$	32	—	—	ns

## Notes to the characteristics

- To ensure no performance losses, permitted output voltage compliance is  $\pm 25\text{ mV}$  maximum.
- Signal-to-noise ratio + THD with 1 kHz full scale sinewave generated at a sampling rate of 176,4 kHz.
- $V_{ripple} = 100\text{ mV}$  and  $f_{ripple} = 100\text{ Hz}$ .

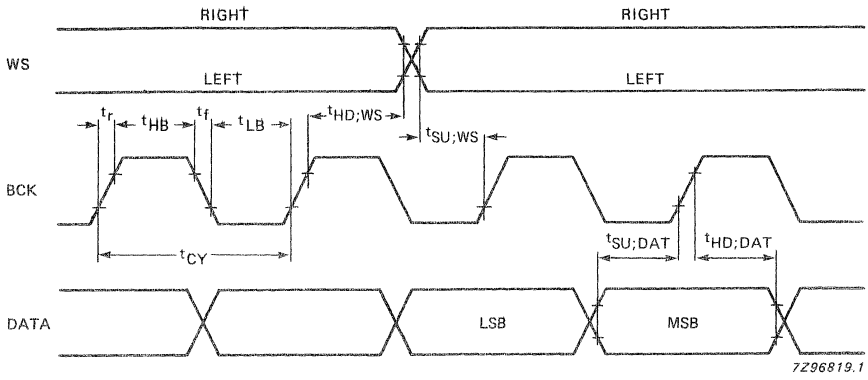


Fig. 3 Format of input signals; time multiplexed (I<sup>2</sup>S format).

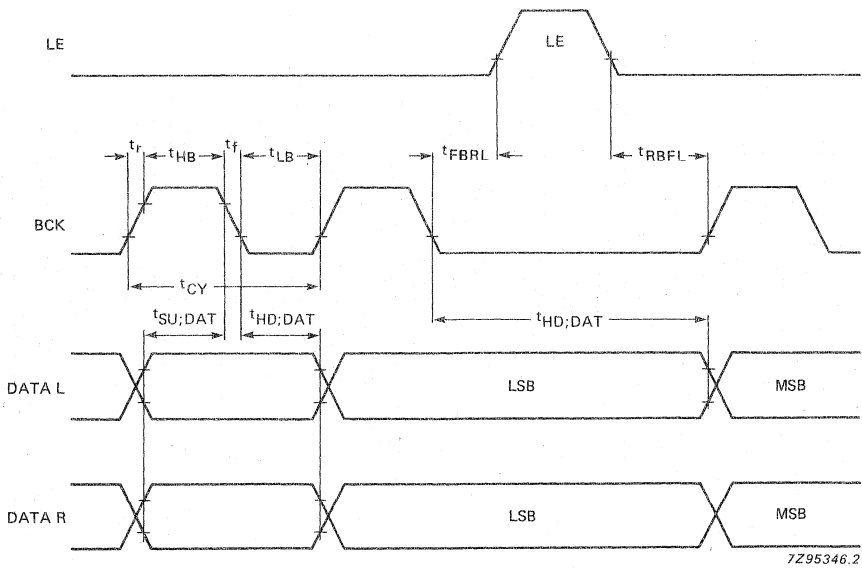


Fig. 4 Format of input signals; simultaneous data.



## PAL — NTSC ENCODER

The TDA2501 encodes two colour-difference signals R-Y and B-Y onto one subcarrier. Quadrature modulation allows the coding to be in accordance with either the PAL or NTSC system.

### Functions:

- Generates two sinusoidal subcarriers with a relative phase of  $90^\circ$  (also accepts external subcarriers)
- Modulates the two subcarriers with the colour difference signals
- Inverts the output from one modulator on command of an external signal (as in case of PAL)
- Sums the output from the modulators to obtain a quadrature modulated output signal
- Clamps the output d.c. level to a reference voltage
- Divides the frequency of horizontal sync pulses by three so that the output level can be clamped and the balance of the two modulators sequentially controlled during the line-blanking minus burst-key period

### QUICK REFERENCE DATA

Supply voltage (pin 6)	$V_p$	typ.	6 V
Supply current	$I_p$	typ.	40 mA
Output chrominance voltage (pin 9)	$V_{g(p-p)}$	max.	1,4 V
Storage temperature	$T_{stg}$		-65 to +150 °C
Operating ambient temperature	$T_{amb}$		-25 to +70 °C

### PACKAGE OUTLINE

16-lead DIL; plastic with internal heat spreader (SOT-38).

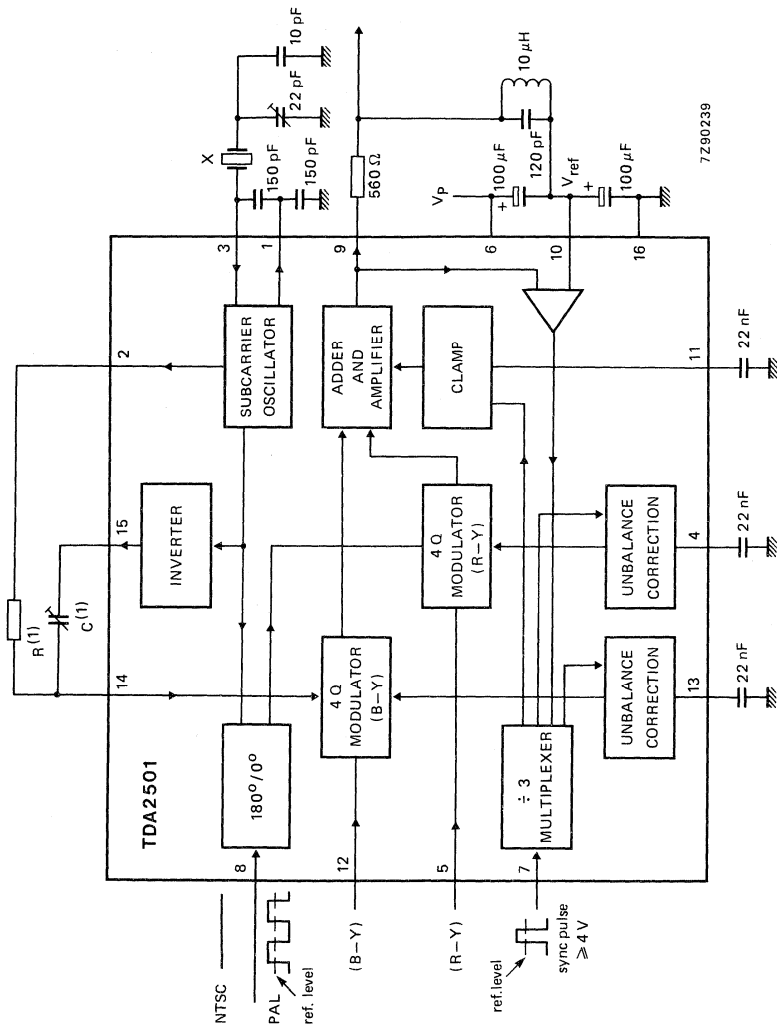


Fig. 1 Block diagram. Also test and application diagram.

(1)  $R = 0,885 (2 \pi fC)$ ; for PAL  $f = 4,433 619 \text{ MHz}$ ,  $R = 963 \Omega$  and  $C = 33 \text{ pF}$ .

**DESCRIPTION**

The colour difference signals B-Y and R-Y with a maximum amplitude of 1,4 volt are to be applied at pin 12 and pin 5. D.C.-coupling of the input signals is allowed if their d.c. levels are within specified limits from the d.c. level at pin 10 ( $V_{ref}$ ). The following table shows these limits as a function of supply voltage. The table also shows the limits of the reference voltage range as a function of the supply voltage.

supply voltage $V_{6-16}$ (V)	input d.c. (R-Y) (B-Y) min. (V)*	$V_{5-16}$ $V_{12-16}$ (V) max. (V)*	reference voltage*		
			$V_{10-16}$ (V)		
			min	typ.	max.
5,5	2,4	3,3	2,3	3,0	3,5
6,0	$> V_{ref} - 1,4 V$	3,8	2,4	3,3	3,9
7,0	$> V_{ref} - 1,4 V$	4,8	2,6	4,0	4,7
8,0	$> V_{ref} - 1,4 V$	5,8	2,8	4,8	5,5
9,0	$> V_{ref} - 1,4 V$	6,8	3,0	5,5	6,3
10,0	$> V_{ref} - 1,4 V$	7,8	3,2	6,3	7,1

\* Minimum 2,4 V.

\*\* At  $V_S - 2,2 V$ .

• Minimum values at  $0,2 V_S + 1,2 V$ .

Typical values without pull-up or pull-down resistor.

Maximum values at  $0,8 V_S - 0,9 V$ .

The inputs (B-Y) and (R-Y) should be zero, independent of their (limited) d.c.-levels, during the line-blanking minus burst-key period (LB – BK). Clamping the output and correcting the out-of-balance of the modulators, is done by applying a HIGH level to pin 7 within the (LB – BK) period (e.g. line sync pulse).

Modulation at output:

$V_G = \text{LOW}$ ; output =  $sc \times (B-Y) + sc' \times (R-Y)$

$V_G = \text{HIGH}$ ; output =  $sc \times (B-Y) - sc' \times (R-Y)$

in which  $sc'$  = subcarrier

$sc = 90^\circ$  phase-shifted subcarrier to  $sc'$  ( $sc$  lags).

The bandpass filter at the output suppresses the d.c. components of the (R-Y) + (B-Y) signal. Luminance (Y) is not processed by this circuit.

**Internal subcarrier**

The internal subcarrier oscillator is crystal controlled. The oscillator generates a sinewave with low harmonic distortion and an amplitude of about 500 mV peak-to-peak. The amplitude can be changed if necessary with a current input at pin 1. The adjustment range is 0 to 800 mV, with a corresponding current range of +250 to -150  $\mu A$ .

**Phase shift**

To obtain a  $90^\circ$  phase-shifted carrier, two low impedance subcarrier outputs are provided, pins 2 and 15, the last being the inverse of the first. Between pins 2 and 15 an external RC combination must be used to obtain the desired  $90^\circ$  shift. The capacitor value must be limited to 33 pF to minimize subcarrier distortion.

The resistor required between pins 2 and 14 is 0,885 ( $2 \pi fC$ ).

**External subcarrier**

The (B-Y) and (R-Y) signals can also be multiplied with an external subcarrier. In this case the external subcarrier is connected to pin 1. For maximum input impedance at pin 1  $V_3 = V_{16}$  ( $Z_{mi} > 1400 \Omega$ ). The same RC network generate the  $90^\circ$  phase-shifted subcarrier. For the use of an externally generated subcarrier, applied at pin 14, the d.c. level must be the same as in the case of an RC-network generated one.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage $V_{6-16}$	$V_p$ max.	13,2 V
Total power dissipation		see derating curve (Fig. 2)
Storage temperature range	$T_{stg}$	-65 to +150 °C
Operating ambient temperature	$T_{amb}$	-25 to +70 °C

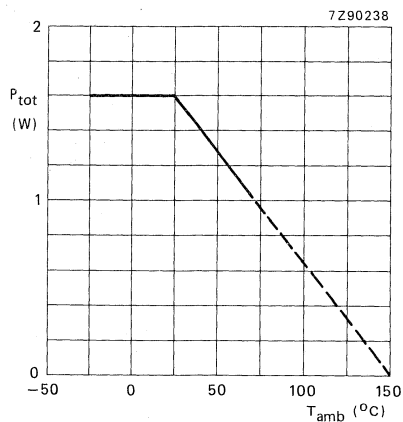


Fig. 2 Power derating curve.

## D.C. CHARACTERISTICS

 $V_{6-10} = -V_{16-10} = 3 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^{\circ}\text{C}$ ; see Fig. 1

		min.	typ.	max.
Single power supply	$V_{6-16}$	5,5	6	10 V
Dual power supply				
positive	$V_{6-10}$	2	3	5 V
negative	$-V_{16-10}$	2,3	3	5 V
Supply current				
at pin 10				
positive (pin 6)	$I_{10}$	-1	0	3,5 mA
negative (pin 6)	$I_6$	28	40	64 mA
	$-I_{16}$	28	40	64 mA
Limitation d.c. level				
oscillator feedback	$V_1$	-30	0	+30 mV
Nominal amplitude input signal				
a.c. peak-to-peak	$V_{5(p-p)}$	-	1	1,4 V
	$V_{12(p-p)}$			
Input voltages (R-Y) and (B-Y)				
zero d.c. level	$V_5, V_{12}$	2,4	3,3	3,9 V
Required level sync input				
HIGH	$V_7$	4	-	$V_P$ V
LOW	$V_7$	-	-	$V_{10}$ V
Required level PAL pulse (H/2)				
HIGH	$V_8$	$V_{10} + 0,8$	-	$V_P$ V
LOW	$V_8$	$-V_P$	-	0 V
Input current sync input				
$V_7 = V_P + 1 \text{ V}$	$I_7$	-	4	15 $\mu\text{A}$
Input current PAL input (H/2)				
$V_8 = V_{10} + 0,8 \text{ V}$	$I_8$	-	1,5	5 $\mu\text{A}$
Output chroma voltage swing				
(R-Y) = (B-Y) = 1,4 V				
subcarrier pulse = 0,5 V	$V_{9(p-p)}$	-	-	1,4 V
Amplitude of suppressed				
subcarrier	$V_9$	0	7	16 mV
Input currents				
$V_4 = V_{10}$	$I_4$	0	1,5	5 $\mu\text{A}$
$V_{11} = V_{10}$	$I_{11}$	0	1,5	5 $\mu\text{A}$
$V_{13} = V_{10}$	$I_{13}$	0	1,5	5 $\mu\text{A}$
$V_5 = V_{10}$	$I_5$	0	9	30 $\mu\text{A}$
$V_{12} = V_{10}$	$I_{12}$	0	9	30 $\mu\text{A}$
$V_{14} = V_{16} + 2,3 \text{ V}$	$I_{14}$	-	6	- $\mu\text{A}$
Input impedance (R-Y)	$Z_5$	-	160	- $\text{k}\Omega$
Input impedance (B-Y)	$Z_{12}$	-	160	- $\text{k}\Omega$



## FM MODEM FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA2504 is a monolithic integrated circuit for FM audio signal processing for both record and playback in video recorders.

The circuit incorporates the following functions:

Record

- Preamplifier
- Automatic level control circuit (ALC) } for microphone
- Frequency modulator (in combination with the CCO)
- H.F. output buffer

Playback

- H.F. amplifier/limiter
- Phase detector
- Current controlled oscillator (CCO)
- Sample and hold circuit (S/H) in which the hold information is generated by a hold time setting circuit driven by the head identification pulse (HID)

Furthermore

- Internal voltage/current stabilizer
- Record/playback switching circuit

### QUICK REFERENCE DATA

Supply voltage (pin 14)	$V_P = V_{14-1}$	typ.	5 V
Supply current (pin 14)			
for record at $V_{20-1} > 2,0$ V	$I_P = I_{14}$	typ.	17 mA
for playback at $V_{20-1} < 0,8$ V	$I_P = I_{14}$	typ.	20 mA

### RECORD

#### Preamplifier + ALC

A.F. output voltage at $V_i = 2$ mV	$V_O$	typ.	600 mV
Total harmonic distortion			
at $V_i = 2$ mV	THD	typ.	0,3 %
at $V_i = 40$ mV	THD	typ.	0,5 %
Signal-to-noise ratio related to			
$V_O = 600$ mV; $R_S = 1$ k $\Omega$	S/N	typ.	60 dB

#### Modulator

A.F. input current for $\Delta f = 100$ kHz	$\Delta I_M$	typ.	2,8 $\mu$ A
<b>H.F. output stage</b> (pin 13)			
Output voltage (peak-to-peak value)	$V_{O(p-p)}$	typ.	2,5 V

### PLAYBACK


#### Current controlled oscillator (CCO)

Nominal frequency	$f_{CCO}$	typ.	1,5 MHz
<b>Limiter + S/H amplifier</b>			
A.F. output voltage at $V_i = 10$ mV	$V_O$	typ.	435 mV
Signal-to-noise ratio at $V_O = 435$ mV	S/N	typ.	56 dB
Total harmonic distortion at $V_i = 10$ mV	THD	typ.	0,5 %

### PACKAGE OUTLINES

TDA2504P: 24-lead DIL; plastic (with internal heat spreader) (SOT-101A).

TDA2504T: 24-lead mini-pack; plastic (SO-24; SOT-137A).

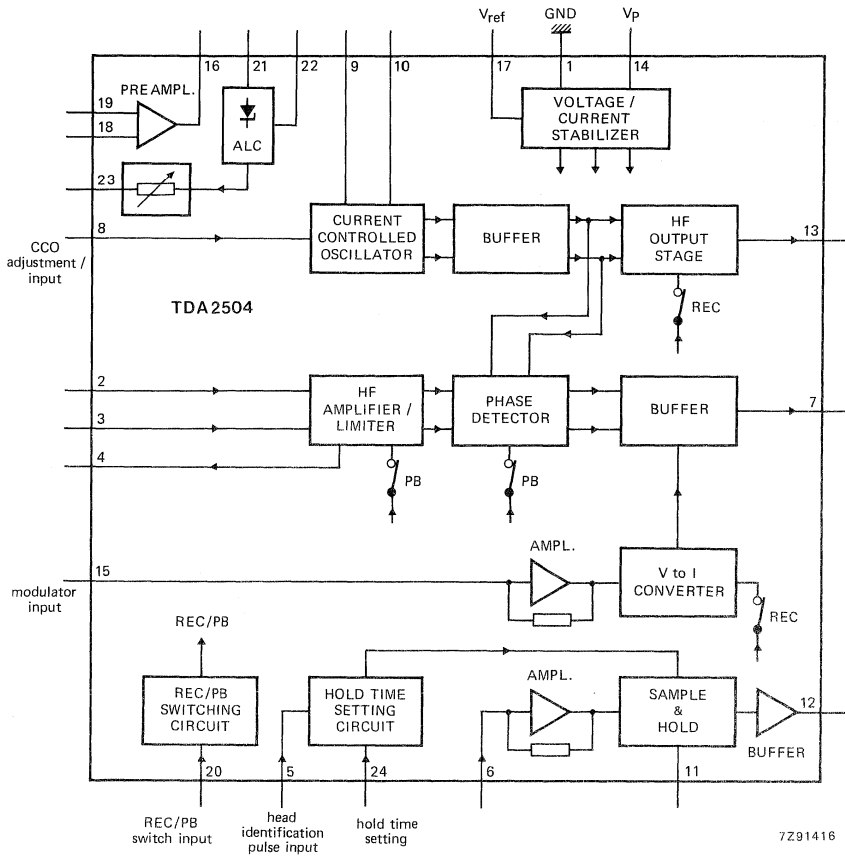

REC = record  
 PB = playback  
 ALC = automatic level control  
 CCO = current controlled oscillator


Fig. 1 Block diagram.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 14)	$V_P = V_{14-1}$	max. 13,2 V
Total power dissipation	$P_{tot}$	see Fig. 2
Storage temperature range	$T_{stg}$	-55 to + 150 °C
Operating ambient temperature range	$T_{amb}$	-20 to + 70 °C

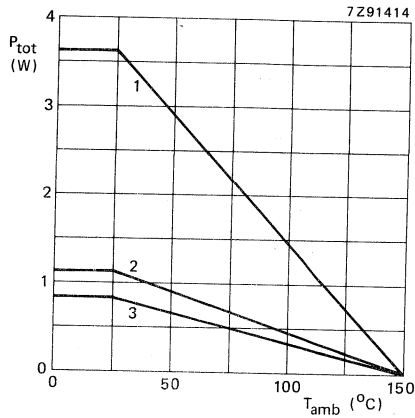

- (1) SOT-101 with internal heatspreader.
- (2) SOT-137 mounted on ceramic substrate (50 x 50 x 0,7 mm).
- (3) SOT-137 mounted on printed circuit board (50 x 50 x 1,5 mm).

Fig. 2 Power derating curves.

## D.C. CHARACTERISTICS

$V_P = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; measured in Fig. 6; all voltages with reference to pin 1; all currents positive into the IC; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage (pin 14)	$V_P = V_{14-1}$	4,75	5,0	13,2	V
Reference voltage (pin 17)*	$V_{ref} = V_{17-1}$	—	2,7	—	V
Supply current (pin 14)					
record at $V_{20-1} > 2,0\text{ V}$	$I_P = I_{14}$	—	17	—	mA
playback at $V_{20-1} < 0,8\text{ V}$	$I_P = I_{14}$	—	20	—	mA
<b>Total power dissipation</b>					
record at $V_{20-1} > 2,0\text{ V}$	$P_{tot}$	—	85	—	mW
playback at $V_{20-1} < 0,8\text{ V}$	$P_{tot}$	—	100	—	mW
<b>Input voltage</b>					
pins 2, 3, and 4	$V_{2,3,4-1}$	—	3,0	—	V
pin 6	$V_{6-1}$	—	2,1	—	V
pin 8	$V_{8-1}$	—	1,9	—	V
pin 15	$V_{15-1}$	—	2,7	—	V
pins 18, 19	$V_{18,19-1}$	—	2,7	—	V
<b>Output voltage</b>					
pin 12	$V_{12-1}$	—	2,1	—	V
pin 13					
record	$V_{13-1}$	—	3,7	—	V
playback	$V_{13-1}$	—	$V_P$	—	V
<b>Input current</b>					
pin 17	$-I_{17}$	—	—	500	$\mu\text{A}$

\* Temperature drift  $V_{17-1} = \text{typ. } 0,5\text{ mV}/^\circ\text{C}$ .

## A.C. CHARACTERISTICS

$V_P = 5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ;  $f_i = 1,5 \text{ MHz}$  (h.f.),  $\Delta f = 100 \text{ kHz}$ ,  $f_m = 1 \text{ kHz}$  measured in Fig. 6; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>PLAYBACK PART (<math>V_{20.1} &lt; 0,8 \text{ V}</math>)</b>					
<b>H.F. amplifier/limiter</b>					
Sensitivity (PLL locked)	$V_i$	—	100	300	$\mu\text{V}$
Signal-to-noise ratio					
at $V_i = 300 \mu\text{V}$	S/N	—	50	—	dB
at $V_i = 10 \text{ mV}$	S/N	—	56	—	dB
<b>A.M. rejection</b>					
at $V_i = 300 \mu\text{V}$	$\alpha$	—	45	—	dB
at $V_i = 10 \text{ mV}$	$\alpha$	—	50	—	dB
Input conductance	$g_{ie}$	—	tbf	—	$\mu\text{s}$
Input capacitance	$C_{ie}$	—	tbf	—	pF
<b>Current controlled oscillator (CCO)</b>					
Nominal frequency (adjustable with $R_{8.1}$ )	$f_{\text{CCO}}$	—	1,5	—	MHz
Capture range (deviation from 1,5 MHz)					
at $V_i = 10 \text{ mV}$	$\Delta f_{\text{CCO}}$	—	150	—	kHz
Temperature coefficient	TC	—	$300 \cdot 10^{-6}$	—	$\text{K}^{-1}$
<b>Phase detector</b>					
A.F. output voltage (pin 7)					
at $V_i = 10 \text{ mV}$	$V_o$	—	435	—	mV
Output impedance	$ Z_o $	—	100	—	$\text{k}\Omega$
<b>Hold time setting circuit</b>					
(HID pulse is 25 Hz with a duty factor of 50%)					
HID input (pin 5)					
Input voltage HIGH	$V_{iH}$	2,0	—	$V_P$	V
Input voltage LOW	$V_{iL}$	0,2	—	0,8	V
Input current HIGH	$I_{iH}$	—	—	1	$\mu\text{A}$
Input current LOW	$-I_{iL}$	10	—	—	$\mu\text{A}$
Hold time pulse (pin 24)					
with adjustable resistor $R_{13} = 50 \text{ k}\Omega$ and $C_{16} = 1 \text{ nF}$	$t_{\text{Hold}}$	3	—	33	$\mu\text{s}$
with fixed resistor $R_{13} = 33 \text{ k}\Omega$ and $C_{16} = 1 \text{ nF}$	$t_{\text{Hold}}$	—	20	—	$\mu\text{s}$




## A.C. CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>PLAYBACK PART (continued)</b>					
<b>Sample and hold circuit (pin 12 to pin 6)</b>					
Total gain $V_o/V_i$ with resistor $R2 + R3 = 27 \text{ k}\Omega$	$G_{V \text{ tot}}$	-2	0	+2	dB
Gain of input amplifier (adjustable) $R_{\text{internal}} = 28 \text{ k}\Omega$ $R2 + R3$	$G_V$	-	-	20	dB
Output impedance (pin 12)	$ Z_o $	-	-	300	$\Omega$
Maximum a.f. output voltage (THD $\leq 1\%$ )	$V_o$	-	-	500	mV
D.C. voltage shift during hold pulse	$\Delta V_{12-1}$	-	20	-	mV
Residual hold pulse	$V_{12-1}$	-	tbf	-	mV
Delay of HID pulse to hold pulse	$t_d$	-	1	-	$\mu\text{s}$
<b>Overall performance (H.F. input to A.F. output)</b> ( $f_{HF} = 1,5 \text{ MHz}$ ; $\Delta f = 100 \text{ kHz}$ ; $f_m = 1 \text{ kHz}$ )					
Output voltage at $V_i = 10 \text{ mV}$	$V_{12-1}$	-	435	-	mV
Signal-to-noise ratio at $V_i = 10 \text{ mV}$	S/N	-	56	-	dB
Total harmonic distortion	THD	-	0,5	-	%
<b>RECORDING PART (<math>V_{20-1} &gt; 2,0 \text{ V}</math>)</b> (A.F. input frequency $f_i = 1 \text{ kHz}$ )					
<b>Preamplifier for microphone</b>					
Open loop voltage gain	$G_o$	-	98	-	dB
Closed loop voltage gain (note 1)	$G_c$	52	52,5	53	dB
A.F. output voltage at THD = 1%	$V_o$	-	-	1	V
at THD = 0,2%	$V_o$	-	0,9	-	V
Noise input voltage (r.m.s. value) $R_S = 1 \text{ k}\Omega$ ; B = 60 Hz to 15 kHz	$V_{n(\text{rms})}$	-	1,2	2,0	$\mu\text{V}$
Input impedance	$ Z_i $	100	-	-	$\text{k}\Omega$
Output current (pin 16)	$I_o$	-	-	1	mA
<b>Automatic level control (ALC)</b>					
A.F. output voltage variation at $\Delta V_i = 26 \text{ dB}$ (note 2)	$\Delta V_o$	-	1	3	dB
ALC timing for $\Delta V_i = 20 \text{ dB}$ (note 3)					
limiting time	$t_l$	-	10	50	ms
level setting time	$t_s$	-	5	50	ms
recovery time (without $R12 = 1 \text{ M}\Omega$ )	$t_r$	50	300	-	s

parameter	symbol	min.	typ.	max.	unit
<b>Preamplifier + ALC</b>					
A.F. output voltage with ALC at $V_i = 2$ mV	$V_o$	—	600	—	mV
Total harmonic distortion with ALC at $V_i = 2$ mV	THD	—	0,3	1	%
at $V_i = 40$ mV	THD	—	0,5	3	%
Signal-to-noise ratio related to $V_o = 600$ mV; $R_S = 1$ k $\Omega$ ; B = 60 Hz to 15 kHz (see also Fig. 4)	S/N	—	60	—	dB
<b>Current controlled oscillator (CCO)</b>					
Frequency shift from playback to record	$\Delta f_{CCO}$	—	5	2,0	kHz
Input current (pin 8) for $\Delta f = 100$ kHz	$I_{iM}$	—	40	—	$\mu$ A
<b>Modulator (pin 15 to pin 13)</b>					
A.F. input current for $\Delta f = 100$ kHz at pin 13	$\Delta I_M$	—	2,8	—	$\mu$ A
Total gain $V_o/V_i$ with R14 = 100 k $\Omega$ (note 4)	$G_{v\text{ tot}}$	—	7,5	—	dB
<b>H.F. output stage (pin 13)</b>					
Output voltage	$V_o$	2	2,5	—	V
Output resistance	R13-1	1,0	1,2	1,4	k $\Omega$
<b>Record/playback switching circuit</b>					
Switching voltage level (pin 20)					
for record	$V_{HIGH}$	2,0	—	8,0	V
for playback	$V_{LOW}$	—	—	0,8	V
Switching current level (pin 20)					
for record	$I_{HIGH}$	—	—	5	$\mu$ A
for playback	$I_{LOW}$	100	60	—	$\mu$ A

**Notes**

1. The minimum closed loop gain is restricted to 35 dB; see also Fig. 4.
2. With respect to  $V_i = 2$  mV;  $R_S = 1$  k $\Omega$ ; see also Fig. 5.
3. With respect to  $V_i = 1,2$  mV; see also Fig. 3.
4. Total gain adjustable with R14.

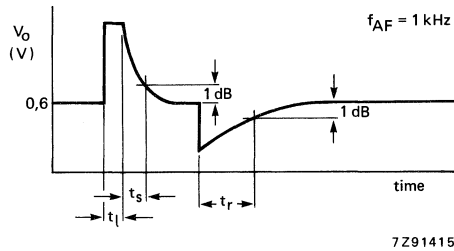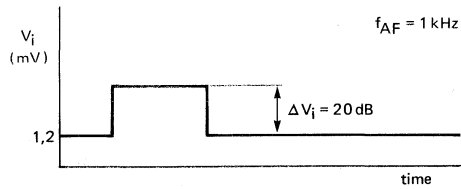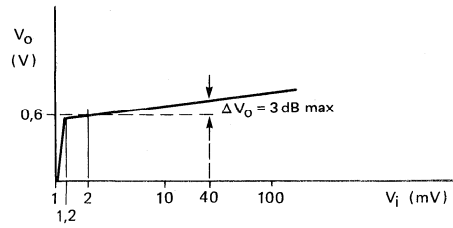


7291415

Fig. 3 Typical ALC curve with  $R_S = 1 \text{ k}\Omega$ .

Where:

- $t_l$  limiting time
- $t_s$  level setting time
- $t_r$  recovery time

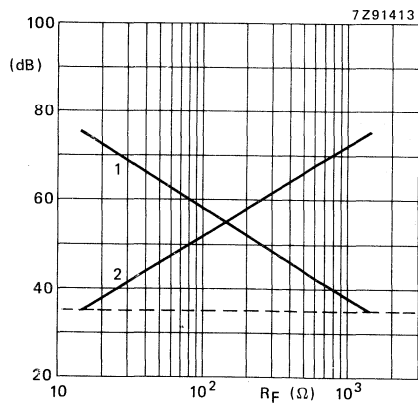

- — — restricted minimum 35 dB.
- (1) voltage gain as a function of resistor  $R_F$ .
- (2) signal-to-noise ratio (S/N) at the output (pin 16) as a function of resistor  $R_F$ .

Fig. 4 Typical curves of preamplifier with automatic level control.


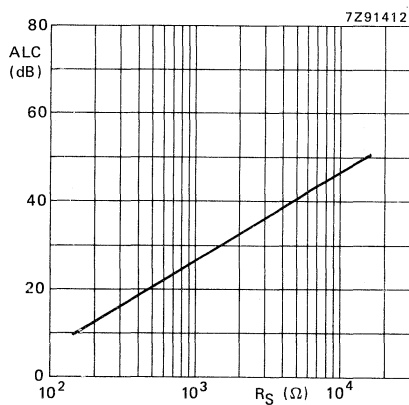


Fig. 5 Automatic level control as a function of source resistor  $R_S$ ; a.f. output voltage ( $\Delta V_O$ ) = 1 dB.

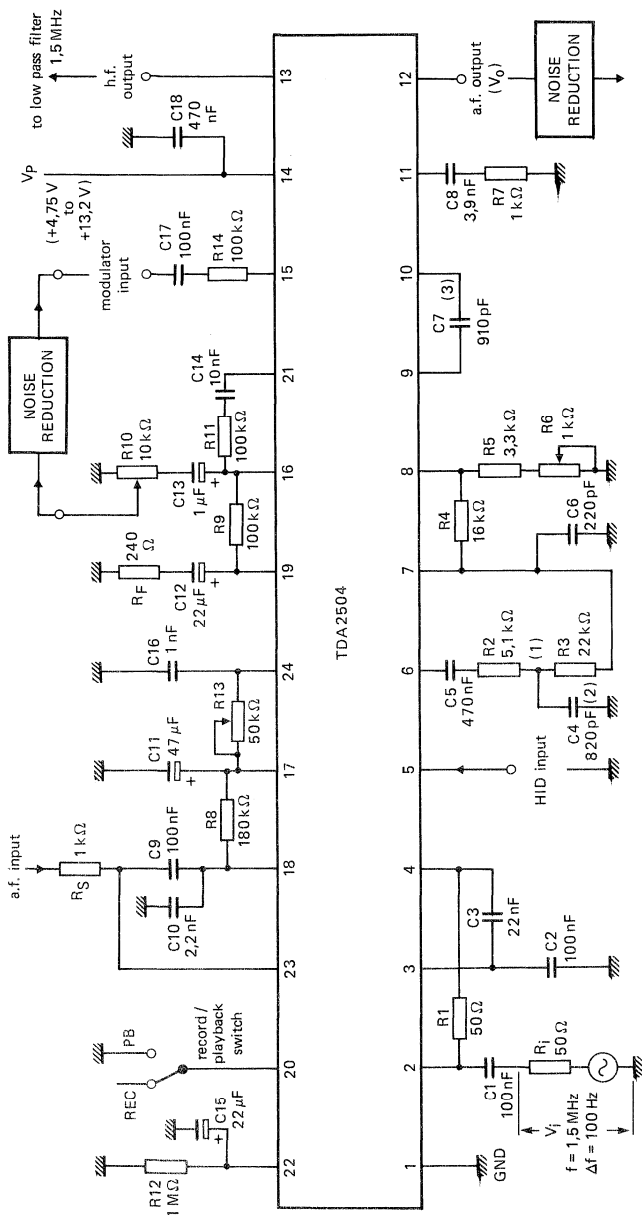

7291417

- (1) R2 + R3 determines gain of amplifier
- (2) R3 + C4 = low-pass filter
- (3) micro poco
- REC = record
- PB = playback
- HID = head identification pulse

Fig. 6 Application diagram; also used as test circuit.



## SECAM ENCODER

### GENERAL DESCRIPTION

The TDA2505 converts the colour difference signals, **after** low-frequency pre-emphasis, into a frequency modulated signal according to the SECAM system. The circuit is intended to be used with the sync generator SAA1043 in video games and homecomputers. The inaccuracy of the subcarrier frequency of about 20 kHz becomes invisible at highly saturated colours.

The required input signals are:

- Horizontal drive (positive or negative pulse) pin 12;
- H/2 pulse (using a positive horizontal drive) pin 11;
- Frame pulse (positive) pin 13;
- Chrominance blanking, according to the SECAM system (positive) pin 14;
- Colour killing pulse if required (positive) pin 14.

### Features

- Chrominance processing
- Frame identification signal generator
- Two frequency reference sources
- Control circuit for the FM-modulator.

### QUICK REFERENCE DATA

Supply voltage	V <sub>5-1</sub>	typ.	6 V
Supply current	I <sub>5</sub>	typ.	80 mA
Reference voltage	V <sub>9-1</sub>	typ.	4,2 V
Clamping pulse voltage	V <sub>12-1</sub>	typ.	6 V
Clamping pulse current	I <sub>12</sub>	typ.	0,51 mA
Frame input current	I <sub>13</sub>	typ.	0,3 mA
Chrominance switching voltage	V <sub>14-1</sub>	>	2 V
Colour killer switching voltage	V <sub>14-1</sub>	>	4 V
Storage temperature	T <sub>stg</sub>		-65 to +150 °C
Operating ambient temperature	T <sub>amb</sub>		-25 to +70 °C

### PACKAGE OUTLINE

28-lead dual in-line; plastic (SOT-117).

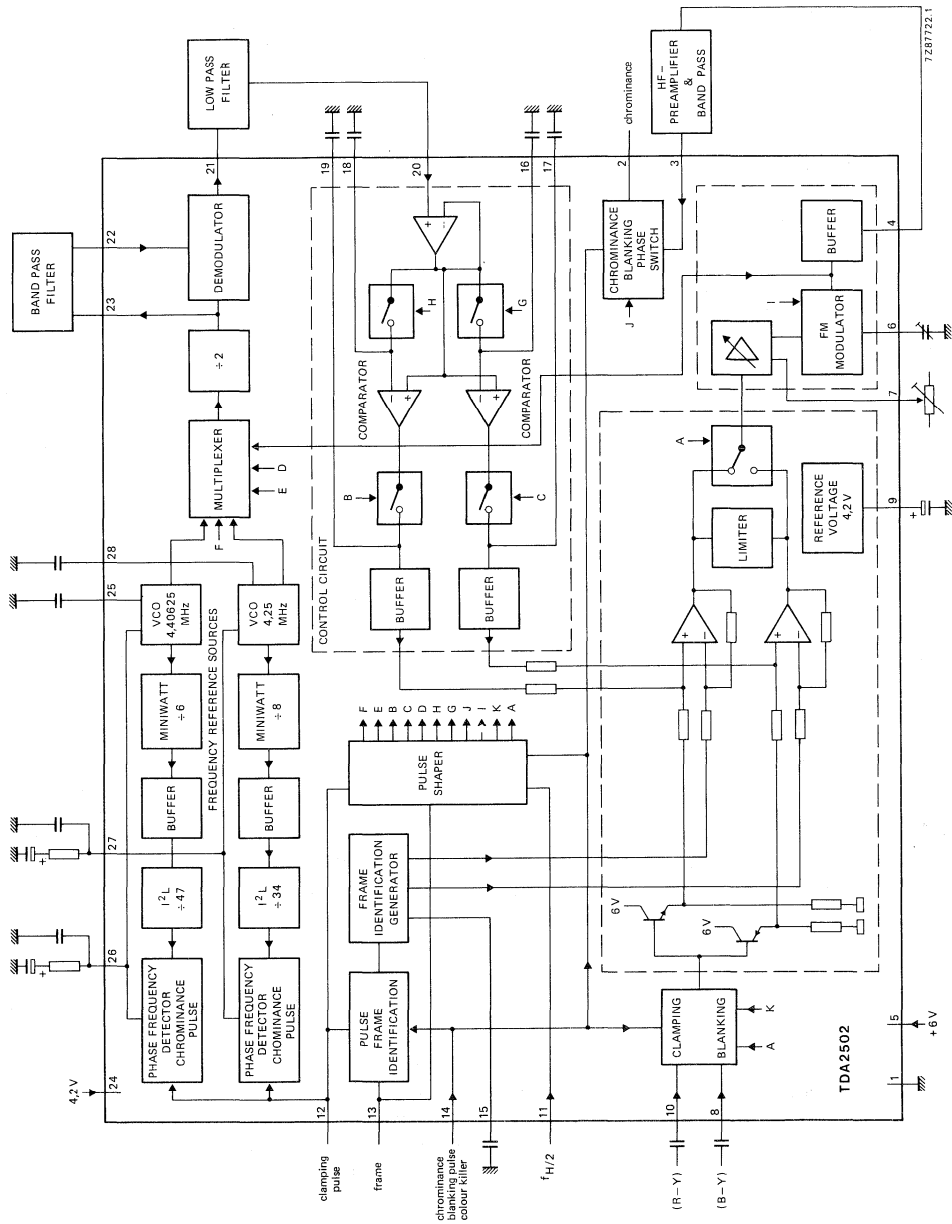


Fig. 1 Block diagram, also test circuit.

**Pin functions**

1. Ground.
2. Chrominance output.
3. Input chrominance blanking stage.  
(connected to output h.f. pre-emphasis and bandpass filter).
4. Output FM modulator (connected to input h.f. pre-emphasis).
5. Positive supply voltage.
6. Tuning the FM modulator.
7. Gain adjustment of the sequential colour difference signals at the output of the FM modulator.
8. Input (B-Y) signal.
9. Output of the internal reference supply voltage.
10. Input (R-Y) signal.
11. Input H/2 pulse.
12. Input horizontal drive.
13. Input frame pulse.
14. Input chrominance blanking pulse and colour killing pulse.
15. Frame identification sawtooth pulse.
16. 4,250 MHz frequency adjustment.
17. (B-Y) control.
18. 4,40625 MHz frequency adjustment.
19. (R-Y) control.
20. Input buffer amplifier (connected to OUTPUT of low-pass filter).
21. Output sync demodulator (connected to INPUT of low-pass filter).
22. Input sync demodulator (connected to output of band-pass filter).
23. Output divider-by-two (internal connected to input sync demodulator).
24. Reference voltage (from pin 9) for the two frequency reference stages.
25. Tuning reference oscillator 4,40625 MHz.
26. Phase frequency detector 4,40625 MHz reference.
27. Phase frequency detector 4,250 MHz reference.
28. Tuning reference oscillator 4,250 MHz.

**FUNCTIONAL DESCRIPTION****Chrominance processing**

The signal (R-Y) and (B-Y) are connected to clamp circuits, where the black level is clamped to the reference voltage. Then the signals are blanked during the chrominance pulse from pin 14. It is also possible to blank (R-Y) and (B-Y) signals in the active line by adding a blanking pulse to the chrominance blanking pulse at pin 14 of 1,7 to 1,9 V. Colour killing can be done by increasing this voltage to 3,6 V.

After clamping and blanking the (R-Y) signals are each fed to a summing amplifier. Other input signals are a d.c. level and the frame identification sawtooth. The output signals of the amplifiers are limited for both upper and lower limit. By switching the summing amplifiers with  $f_{H/2}$  pulse, the signal connected to the FM modulator is sequentially (R-Y) if  $f_{H/2} = \text{HIGH}$  and (B-Y) if  $f_{H/2} = \text{LOW}$ .

By means of the built-in limiter, the gain adjusting of pin 7 and the FM tuning capacitor of pin 6, it is possible to obtain the correct frequency band according to the SECAM system. By using a stop-start pulse the FM modulator starts every line in the same phase. After the high-frequency pre-emphasis and bandpass filter outside the IC the FM signal is connected to the chrominance blanking circuit. The d.c. level must be equal to the reference voltage at pin 9. The FM signal is blanked during the chrominance blanking pulse. By means of an inverting and a non-inverting amplifier at the chrominance blanking stage the initial phase of the FM signal is defined by the following rule:

from frame to frame	$0^\circ, 180^\circ, 0^\circ, 180^\circ$ and so on
from line to line	$0^\circ, 0^\circ, 180^\circ, 0^\circ, 0^\circ, 180^\circ$ and so on.

### Frame identification signal generator

By using the horizontal drive, colour killing pulse and frame pulse the TDA2505 generates pulses for the frame identification according to the SECAM system. The pulses are connected to a sawtooth generator with a capacitor at pin 15. The sawtooth signals for both (R-Y) and (B-Y) are connected to the negative inputs of their summing amplifiers. Limitation to the required shape is caused by the built-in limiter.

### Frequency reference source

The frequency source consists of a voltage controlled oscillator (VCO), several drivers and a phase-frequency detector. The nominal adjusting of the VCO occurs by means of the capacitor at pin 25 (4,40625 MHz) and pin 28 (4,250 MHz).

The signal of the 4,40625 MHz is divided by 282 and the signal of the 4,250 MHz is divided by 272. The divided signals are each connected to the input of a phase frequency detector.

The second input of the phase frequency detector is connected to the horizontal drive input (pin 12). The output of the detector is via a loop filter; pin 26 for the 4,40625 and pin 27 for the 4,250 MHz) connected to the control input of the VCO.

The supply of the dividers and the phase frequency detectors is delivered from pin 24, which is externally connected to pin 9 (reference voltage supply). The dividers and detectors can be switched off by connecting pin 24 to ground. Then it is possible to use external oscillator signals at pin 28 and pin 25. The nominal current consumption decreases then by about 20 mA.

### Control circuit for the FM modulator

This control circuit consists of:

- a. Multiplexer
- b. Divider-by-2
- c. Demodulator
- d. Buffer amplifier
- e. Comparators
- f. Pulse shaper

The signal from the reference oscillators and the signal from the FM modulator are connected to the multiplexer. At the output of the multiplexer the signal is in sequence:

2 lines 4.40625 MHz, 1 line FM-signal of (R-Y), two lines 4,250 MHz and 1 line FM-signal of (B-Y) and so on.

The multiplexer output is connected to a divider-by-2 followed by a synchronous demodulator. The divider equalizes the amplitude and shape of the signals of the reference oscillators and the FM modulator. Via a low pass filter and a buffer amplifier the demodulated signal is sampled during each period of the reference signals. There is one hold capacitor for the 4,250 MHz (pin 16) and one for the 4,40625 MHz reference (pin 18). The buffer amplifier is also connected to the positive inputs of two comparators. One comparator for the (R-Y) control loop and one comparator for the (B-Y) loop. The negative inputs of the comparators are connected to the hold capacitors of the reference sources. Each comparator output is sampled and stored in a capacitor during the blanking of the demodulated FM signal (pin 17 for the (B-Y) loop and pin 19 for the (R-Y) loop). The stored information controls the d.c. level of the summing amplifiers. The input pulses (pins 11, 12, 13 and 14) are used in the pulse-shaper to generate the correct switch- and sample pulses.

### RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	V <sub>5-1</sub>	max.	13,2 V
Total power dissipation			see derating curve
Storage temperature	T <sub>stg</sub>		-65 to +150 °C
Operating ambient temperature	T <sub>amb</sub>		-25 to +70 °C

## CHARACTERISTICS

All voltages refer to pin 1 (GND). Values measured in test circuit Fig. 1.  $T_{amb} = 25^{\circ}\text{C}$ ;  $V_{5-1} = 6\text{ V}$ .

parameter	symbol	min.	typ.	max.	unit
Supply voltage	$V_{5-1}$	5,5	6,0	10	V
Supply current					
$V_{24} = 0\text{ V}$	$I_5$	—	60	—	mA
$V_{24} = 9\text{ V}$	$I_5$	—	80	—	mA
Reference voltage (pin 9)	$V_{ref}$	4,0	4,2	4,4	V
Output voltage blanked chrominance ( $V_{14}$ HIGH)	$V_2$	4,0	4,2	4,4	V
$V_2$ inverts after frame pulse $V_{13} = \text{L H L}$	$V_2$	$V_{ref} \pm (V_3 - V_{ref})$			
Output amplitude FM modulator	$V_4$	0,9	1,0	1,1	V
Input current phase switch and chrominance blanking	$I_3$	—	3	6	$\mu\text{A}$
Modulator tuning current sink current at $V_6 > V_9$ source current at $V_6 < V_9$ ; $V_7 = 3,06\text{ V}$	$I_6$	163	—	305	$\mu\text{A}$
Bias current gain-control	$I_7$	0	—	1	$\mu\text{A}$
Input voltage (R-Y) and (B-Y) clamped	$V_{8,10}$	$V_9 - 0,1$	$V_9$	$V_9 + 0,1$	V
Inputs bias currents (R-Y) and (B-Y)	$I_{8,10}$	—	—	1,5	$\mu\text{A}$
Bias voltage H/2 input	$V_{11}$	1,1	1,2	1,3	V
Input current clamping pulse $V_{12} = V_6$	$I_{12}$	0,4	0,31	0,8	mA
Input current frame pulse $V_{13} = V_9$	$I_{13}$	0,1	0,3	0,5	mA
Input current chrominance blanking at $V_{14} = 6\text{ V}$	$I_{14}$	—	40	50	$\mu\text{A}$
Switching voltage chrominance blanking input signals	$V_{14}$	1,7	—	1,9	V
Switching voltage colour killing	$V_{14}$	3,6	—	—	V
<b>Frame identification</b>					
Voltage LOW	$V_{15L}$	$V_9 - 0,1$	$V_9$	$V_9 + 0,1$	V
Maximum voltage	$V_{15}$	$V_9 + 0,5$	$V_9 + 0,7$	$V_9 + 1$	V
Level during line clamping; $V_{14} > 4\text{ V}$	$V_{15}$	$V_9 - 0,1$	$V_9$	$V_9 + 0,1$	V
Ramp current from 7th to 15th line from start frame pulse	$I_{15}$	0,2	0,25	0,3	mA
Input impedance (ref. freq.)	$Z_{16}$	—	10	—	$\text{k}\Omega$
Input impedance (ref. freq.)	$Z_{18}$	—	10	—	$\text{k}\Omega$
Input impedance (zero freq.)	$Z_{17}$	—	10	—	$\text{k}\Omega$
Input impedance (zero freq.)	$Z_{19}$	—	10	—	$\text{k}\Omega$
Buffer input bias current	$I_{20}$	—	—	1,5	$\mu\text{A}$
Bias voltage demodulator input	$V_{22}$	1,8	1,0	2,2	V
Demodulator output current polarity polarity = $V_{22} - 2\text{ V} \times V_{23} - V_{ref}$	$I_{21}$	0,7	0,9	1,1	mA
Maximum deviation zero level frequencies	$\Delta f_2$	—	20	—	kHz

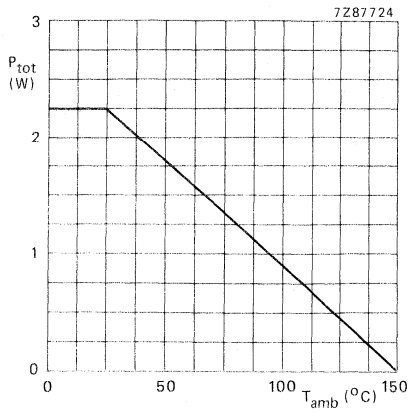


Fig. 2 Power derating curve.

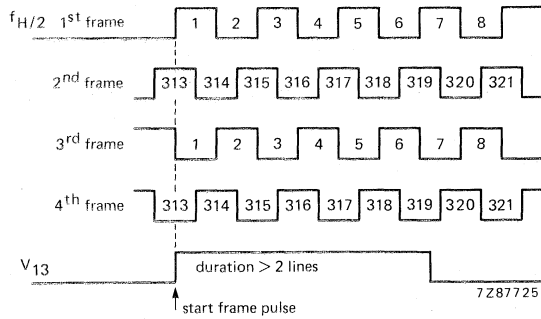


Fig. 3 Frame pulse waveform.

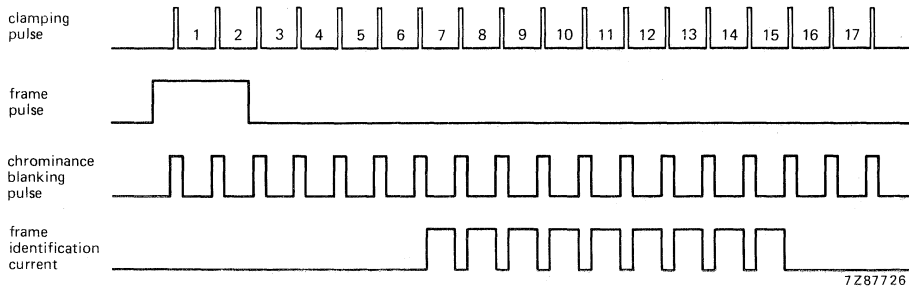


Fig. 4 Pulse waveforms.

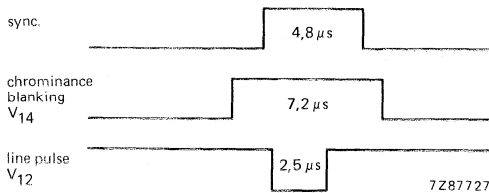


Fig. 5 Chrominance blanking and line pulse waveform.

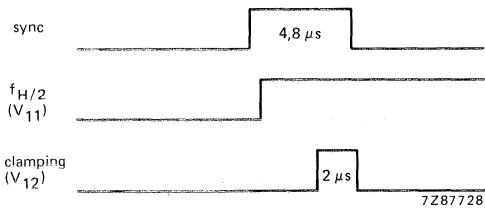


Fig. 6 Chrominance blanking H/2 and clamping pulse waveform. These two pulses eventually instead of line pulse.

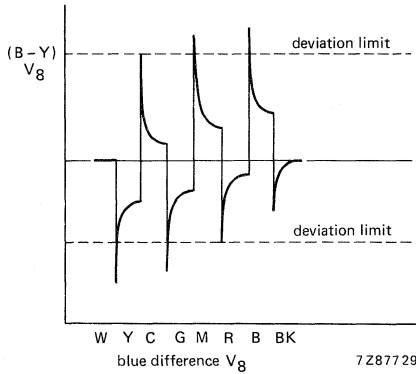


Fig. 7 Blue difference V<sub>g</sub> waveform.

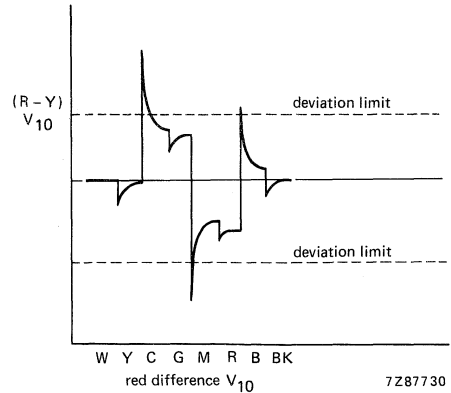


Fig. 8 Red difference V<sub>10</sub> waveform.

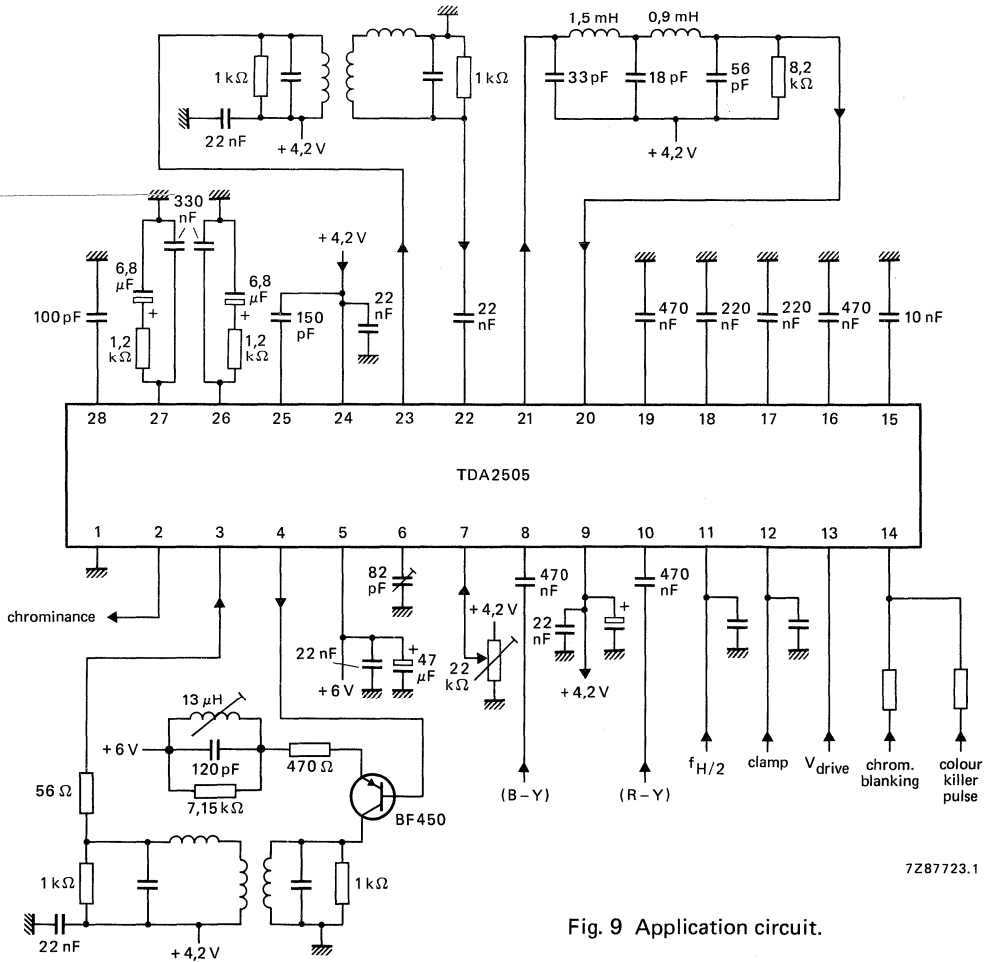


Fig. 9 Application circuit.





## SECAM ENCODER

### GENERAL DESCRIPTION

The TDA2506 converts colour-difference signals ( $D'R$  and  $D'B$ ) into sequential, frequency modulated signals according to the SECAM system. The signals ( $D'R$ ) and ( $D'B$ ) are the colour difference signals before low-frequency pre-emphasis;  $D'R = -1,9 (R-Y)$  and  $D'B = \pm 1,5 (B-Y)$ . The circuit is intended for use in video cameras, games, recorders and players, PAL-SECAM transcoding circuits and SECAM test signal generators.

Synchronizing pulses required for operation of the TDA2506 may be obtained from a universal sync generator SAA1043 or other pulse generator. All pulses are to be active HIGH and are as follows:

- Horizontal sync pulses to pin 11
- Half-rate horizontal sync (H/2) pulses to pin 9
- Vertical sync pulses to pin 12
- Chrominance blanking pulses to pin 13 (may include colour-killer pulses)

Frequency modulation is performed in conjunction with modulator-controller TDA2507.

### Features

- Chrominance processor
- Vertical identification signal generator
- Timing pulse output to TDA2507
- Sample and hold circuit for control signal from TDA2507
- No adjustments of external components required (except high-frequency pre-emphasis (bell filter) stage)

### QUICK REFERENCE DATA

Supply voltage	$V_{4-2}$	typ.	5 V
Supply current	$I_4$	typ.	45 mA
Reference voltage	$V_{7-2}, V_{22-24}$	typ.	3,5 V
Operating ambient temperature range	$T_{amb}$		-25 to +70 °C
Storage temperature range	$T_{stg}$		-65 to +150 °C

### PACKAGE OUTLINES

24-lead DIL; plastic (with internal heat spreader) (SOT-101B).

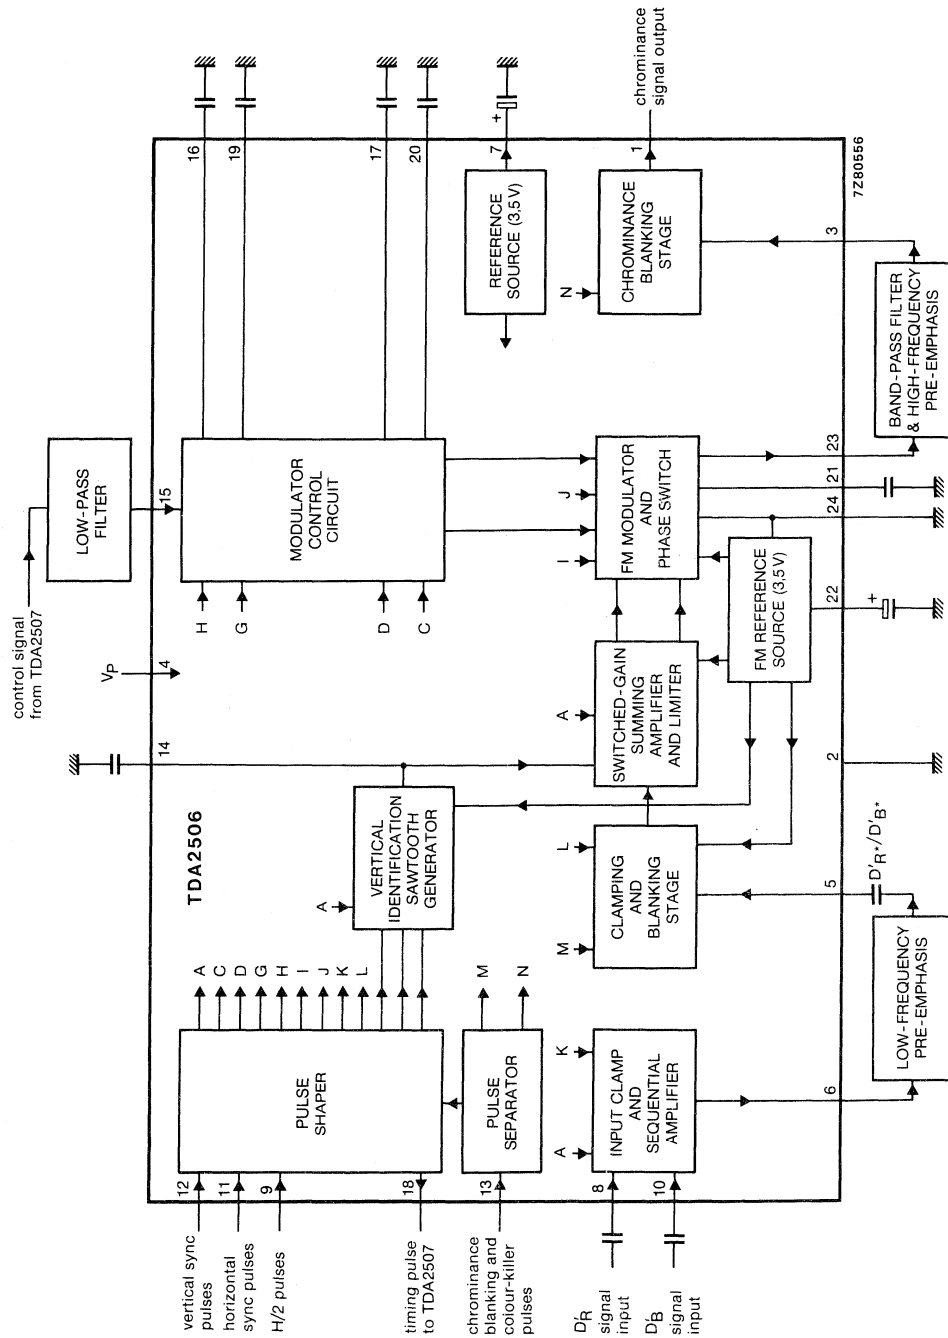


Fig. 1 Block diagram.

**Pin functions**

1. Chrominance signal output.
2. Ground.
3. Input to chrominance blanking stage from high-frequency pre-emphasis and band-pass filter.
4. Positive supply voltage.
5. Input to clamping and blanking stage from low-frequency pre-emphasis filter.
6. Output from sequential amplifier to low-frequency pre-emphasis filter.
7. Reference voltage output.
8.  $D'R$  signal input.
9. H/2 pulse input (required only if specific phase sequencing is desired).
10.  $D'B$  signal input.
11. Horizontal sync pulse input.
12. Vertical sync pulse input.
13. Chrominance blanking and colour-killer pulse input.
14. Capacitor for vertical identification sawtooth.
15. Control signal input from TDA2507 via low-pass filter.
16. 4 406,250 kHz frequency adjustment.
17. (R-Y) control.
18. Timing pulse output to TDA2507.
19. 4 250,000 kHz frequency adjustment.
20. (B-Y) control.
21. FM modulator tuning capacitor (fixed).
22. FM reference voltage output.
23. FM modulator output to high frequency pre-emphasis and band-pass filter.
24. Ground connection for FM modulator.

**FUNCTIONAL DESCRIPTION****Input clamp and sequential amplifier**

This circuit clamps the zero levels of the  $D'R$  and  $D'B$  input signals (pins 8 and 10) to the reference voltage from pin 7. The input signals are switched into the amplifier sequentially by an internally delayed H/2 waveform. The amplifier output at pin 6 is  $D'R$  when the delayed H/2 waveform is HIGH and  $D'B$  when it is LOW. The stage gain is 1,5.

**Clamping and blanking stage**

After external low-frequency pre-emphasis, the sequential  $D'R^*$  and  $D'B^*$  signals are returned to the IC at pin 5. The signal amplitude at pin 5 is typically 0,5 V (peak-to-peak value) for 75% colour bar (EBU). Black levels are clamped to the FM reference voltage (pin 22). Blanking takes place during the chrominance blanking pulse and, if required, during the video blanking and/or colour killing pulses.

FUNCTIONAL DESCRIPTION (continued)

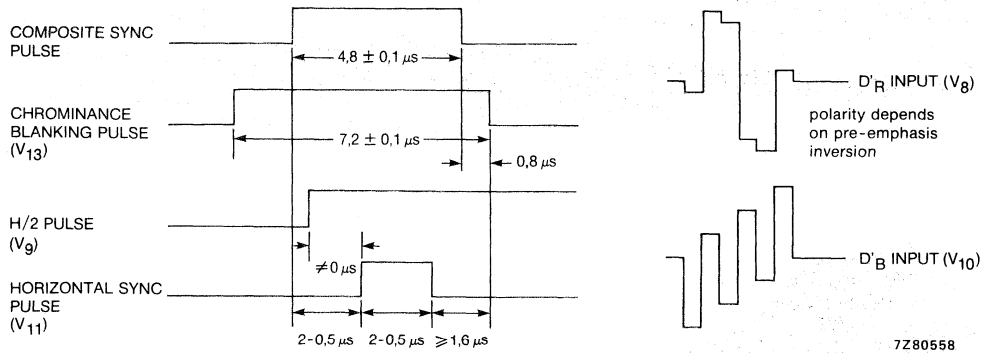
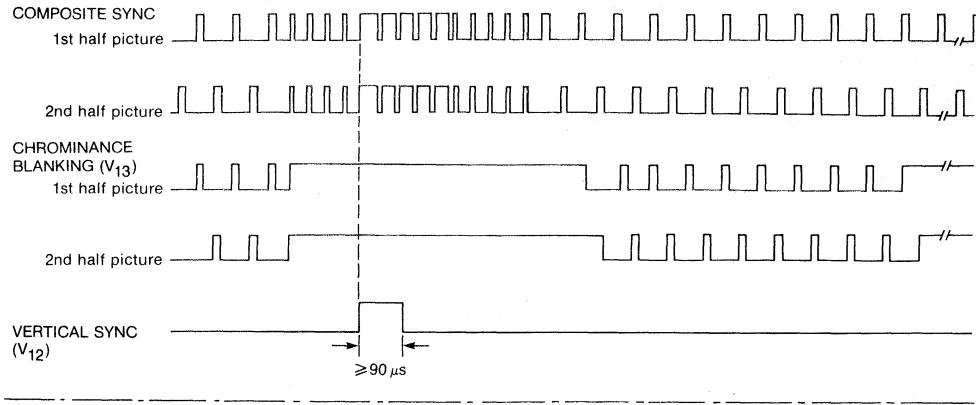


Fig. 2 Survey of input signals in relation to composite sync.

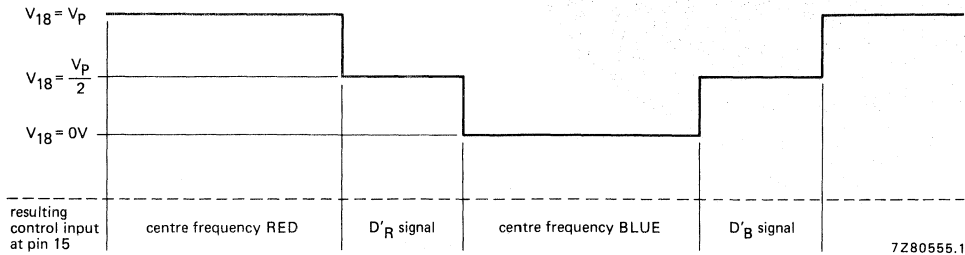


Fig. 3 Timing pulse output (pin 18) and resulting control input (pin 15).

### Switched-gain summing amplifier and limiter

Inputs into the summing amplifier are the sequential  $D'R^*$  and  $D'B^*$  signals, the vertical identification sawtooth waveform and reference d.c. levels. The gain of the amplifier is switched by the internally delayed H/2 waveform to give the correct input amplitudes for the FM modulator ( $D'R^*$  gain =  $280/230 \times D'B^*$  gain). An offset is also introduced between the black levels of the  $D'R^*$  and  $D'B^*$  signals which corresponds to the upper and lower thresholds of the limiter.

### FM modulator and phase switch

The FM modulator provides accurate FM modulation which follows the amplitude envelopes of the sequential  $D'R^*$  and  $D'B^*$  waveforms. The centre frequencies of 4 406,250 kHz for the  $D'R^*$  signal and 4 250,000 kHz for the  $D'B^*$  signal are controlled by d.c. levels from the sample and hold circuit (which in turn are controlled by the TDA2507). The upper and lower frequency limits are  $4\,756,000 \pm 35$  kHz and  $3\,900,000 \pm 35$  kHz.

Reference d.c. levels are switched within the FM modulator to define the starting phase of the modulator output (pin 23) at the initiation of each horizontal and vertical scan. The starting phase sequence is as follows:

vertical scan (frame to frame)  $0^\circ, 180^\circ, 0^\circ, 180^\circ$ , repeating;

horizontal scan (line to line)  $0^\circ, 0^\circ, 180^\circ, 0^\circ, 0^\circ, 180^\circ$ , repeating.

### Chrominance blanking stage

The frequency modulated colour difference signals are passed via high-frequency pre-emphasis and band-pass filters to the chrominance blanking input at pin 3. The d.c. level of this input should be equal to the reference voltage at pin 7. Blanking occurs during the chrominance blanking pulse. The stage gain is 1,75.

### Vertical identification sawtooth generator

Vertical sync, horizontal sync and chrominance blanking pulses are used to determine vertical identification (see Fig. 4). The vertical identification sawtooth generator is driven in opposite directions for identification signals IdR and IdB; the capacitor for the generator is connected at pin 14. If no vertical identification is required, pin 14 should be connected to the FM reference voltage at pin 22.


### Pulse shaper

This stage develops all pulses that are required within the TDA2506 and also the timing pulses required for the modulator controller TDA2507 (see Fig. 3). Internal H/2 pulses are generated by a flip-flop working from the horizontal sync input (pin 11), this makes the H/2 input at pin 9 necessary only if it is required to lock the modulator into a specific phase sequence. If the H/2 input is not required, pin 9 should be connected to ground. A pulse separator at the chrominance blanking/colour-killer input (pin 13) allows this input to be used for blanking the sequential  $D'R^*/D'B^*$  signal.

### Sample and hold circuit

This circuit provides reference voltages to the FM modulator which set the centre modulation frequencies for the sequential  $D'R^*$  and  $D'B^*$  signals. The reference voltage levels are supplied to pin 15 from the TDA2507 in a sequence that is time-related to  $D'R^*/D'B^*$  switching. The levels are sampled and then held for  $D'R^*$  using capacitors at pins 16 and 17, and for  $D'B^*$  using capacitors at pins 19 and 20.

FUNCTIONAL DESCRIPTION (continued)

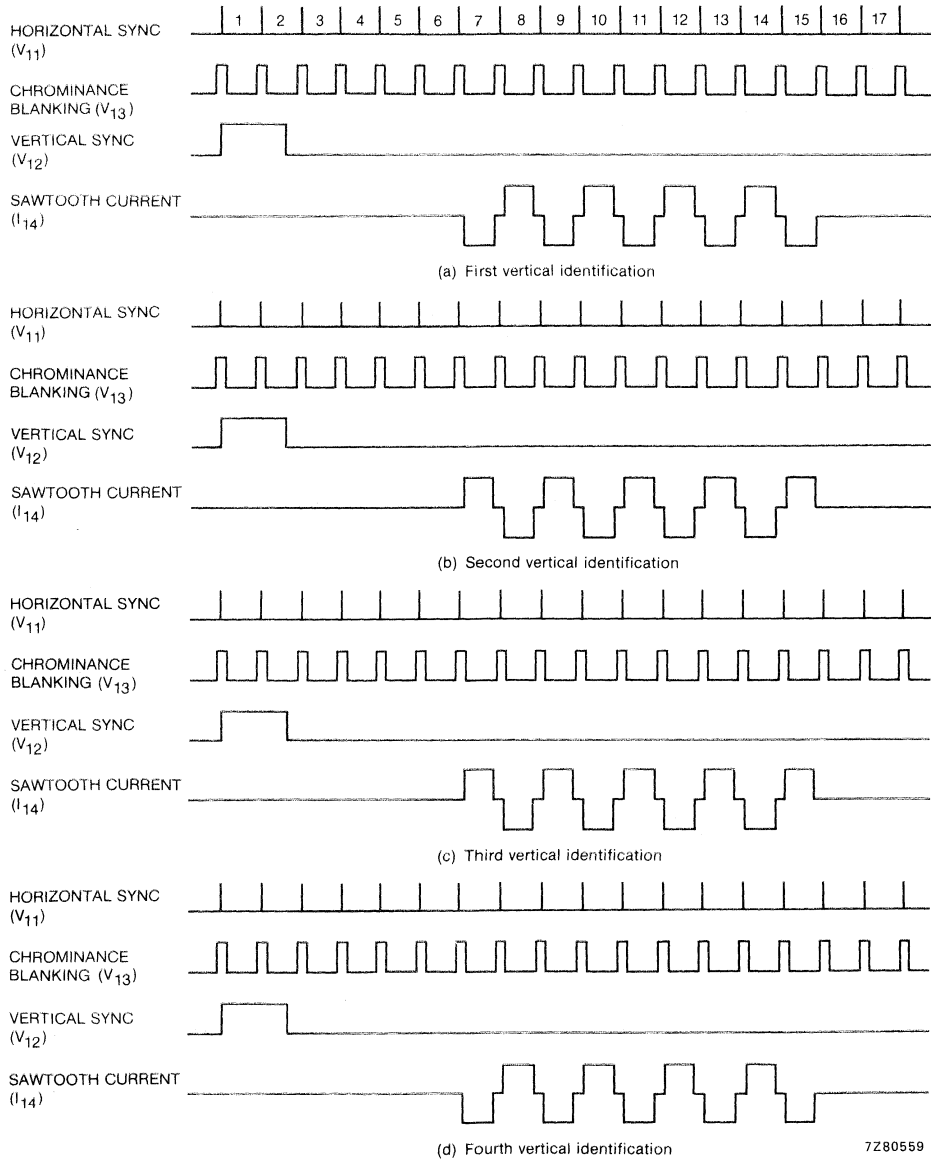

7Z80559

Fig. 4 Vertical identification generation.

**RATINGS**

Limiting values in accordance with the Absolute Maximum Rating system IEC 134

Supply voltage	V <sub>4-1</sub>	max. 13,2 V
Total power dissipation	P <sub>tot</sub>	see Figs 5 and 6
Operating ambient temperature range	T <sub>amb</sub>	-25 to +70 °C
Storage temperature range	T <sub>stg</sub>	-65 to +150 °C

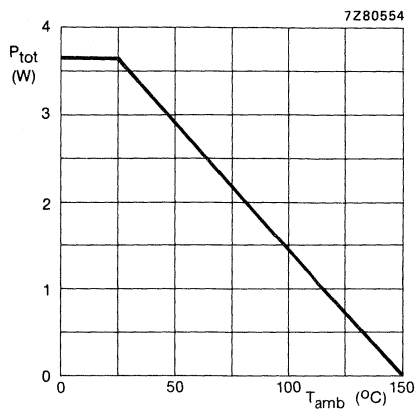


Fig. 5 Power derating curve  
for DIL package (SOT-101B).

## CHARACTERISTICS

$V_p = V_{4-2} = 5\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; all voltages are with reference to ground (pins 2 and 24); all currents stated are positive into the IC; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supplies</b>					
Supply voltage (pin 4)	$V_p = V_{4-2}$	4,75	5	7	V
Supply current	$I_p = I_4$	30	45	60	mA
Reference voltage (pin 7)	$V_{7-2}$	3,35	3,5	3,65	V
Reference voltage (pin 22)	$V_{22-24}$	3,35	3,5	3,65	V
<b>Pulse shaper</b> (pins 9,11 and 12, emitter follower inputs; pin 18, collector output)					
Bias current (pin 9,11,12)	$I_9, I_{11}, I_{12}$	—	—	10	$\mu\text{A}$
Input resistance (pin 9,11,12)	$R_9, R_{11}, R_{12}$	200	—	—	$\text{k}\Omega$
Input pulse amplitude (pin 9,11,12)	$V_9, V_{11}, V_{12}$	2	—	—	V
Timing pulse output (pin 18)					
high level	$V_{18}$	4,7	—	—	V
intermediate ( $V_p/2$ ) level	$V_{18}$	2,3	—	2,7	V
low level	$V_{18}$	—	—	0,3	V
<b>Pulse separator</b> (pin 13, emitter follower)					
Input resistance	$R_{13}$	100	—	—	$\text{k}\Omega$
Chrominance blanking pulse amplitude	$V_{13}$	3,6	—	—	V
$D'R^*/D'B^*$ blanking pulse amplitude (colour killing)	$V_{13}$	1,7	1,8	1,9	V
<b>Vertical identification</b>					
<b>sawtooth generator</b> (pin 14)					
Voltage clamping level	$V_{14}$	$V_{22}-7\text{ mV}$	$V_{22}$	$V_{22}+7\text{ mV}$	V
Ramp current (occurs in lines 7 to 15 after vertical sync)	$\pm I_{14}$	50	70	85	$\mu\text{A}$
Maximum voltage level	$V_{14}$	$V_{22}+0,6$	$V_{22}+0,7$	$V_{22}+0,8$	V
Minimum voltage level	$V_{14}$	$V_{22}-0,8$	$V_{22}-0,7$	$V_{22}-0,6$	V
Voltage level during line blanking	$V_{14}$	$V_{22}-7\text{ mV}$	$V_{22}$	$V_{22}+7\text{ mV}$	V
<b>Inputs <math>D'R^*</math>, <math>D'B^*</math></b> (pins 8 and 10)					
Signal level during clamping ( $I_8, I_{10} = \pm 50\text{ }\mu\text{A}$ )	$V_8, V_{10}$	$V_7-20\text{ mV}$	$V_7$	$V_7+20\text{ mV}$	V
Input bias current	$I_8, I_{10}$	—	—	1,5	$\mu\text{A}$



parameter	symbol	min.	typ.	max.	unit
<b>Sequential amplifier output</b> (pin 6) (Pins 8 and 10 a.c. coupled to fixed d.c. voltage) D.C. output	V <sub>6</sub>	1,6	$\frac{V_{7-10} \text{ mV}}{2}$	1,85	V
Output resistance	R <sub>6</sub>	—	12	16	Ω
Amplifier voltage gain (pin 8 or 10 to pin 6)	G <sub>8,10-6</sub>	1,46	1,5	1,54	—
<b>Clamping and blanking stage</b> (pin 5) Input voltage (clamped; I <sub>5</sub> = ± 50 μA)	V <sub>5</sub>	V <sub>22-10</sub> mV	V <sub>22</sub>	V <sub>22+10</sub> mV	V
Input bias current	I <sub>5</sub>	—	—	1,0	μA
<b>Modulator control circuit</b> (pin 15, buffer amplifier non-inverting input) Bias current	I <sub>15</sub>	—	—	1,25	μA
Permitted input signal d.c. levels	V <sub>15</sub>	2	—	4,3	V
<b>FM modulator output</b> (pin 23, emitter follower) Output resistance	R <sub>23</sub>	—	50	70	Ω
High d.c. output level at V <sub>21</sub> = 4 V	V <sub>23</sub>	V <sub>22-0,85</sub>	—	V <sub>22-0,7</sub>	V
Output signal amplitude	V <sub>23</sub>	0,9	1,0	1,1	V

## CHARACTERISTICS (Continued)

parameter	symbol	min.	typ.	max.	unit
<b>Chrominance blanking stage</b> (pin 3, emitter follower input; pin 1, amplifier output)					
Input current	$I_3$	—	—	15	$\mu\text{A}$
Input resistance	$R_3$	300	—	—	$\text{k}\Omega$
Required d.c. level of input signal	$V_3$	—	$V_7$	—	V
Output resistance	$R_1$	—	—	5	$\Omega$
Temperature coefficient of output d.c. level	TC	—	1,8	—	mV/K
Amplifier gain	$G_{3-1}$	1,70	1,75	1,80	
Output d.c. level during blanking ( $V_{13} = \text{HIGH}$ )	$V_1$	$V_7 - 0,76$	$V_7 - 0,70$	$V_7 - 0,60$	V
Output d.c. level unblanked ( $V_3 = V_7; V_{13} = \text{LOW}$ )	$V_1$	$V_7 - 0,76$	$V_7 - 0,70$	$V_7 - 0,60$	V

## A.C. CHARACTERISTICS


Values are valid for TDA2506 operating with TDA2507. Horizontal frequency ( $f_H$ ) = 15 625 Hz.

parameter	symbol	min.	typ.	max.	unit
Centre frequency RED	$f_{0R}$	—	$4\,406,250 \pm 2$	—	kHz
Centre frequency BLUE	$f_{0B}$	—	$4\,250,000 \pm 2$	—	kHz
Ident. frequency RED *	$f_{IdR}$	—	$4\,756,250 \pm 35$	—	kHz
Ident. frequency BLUE *	$f_{IdB}$	—	$3\,900,000 \pm 35$	—	kHz
Minimum frequency RED **	$-f_R$	—	$4\,126,250 \pm 10$	—	kHz
Maximum frequency RED **	$+f_R$	—	$4\,686,250 \pm 10$	—	kHz
Minimum frequency BLUE **	$-f_B$	—	$4\,020,000 \pm 10$	—	kHz
Maximum frequency BLUE **	$+f_B$	—	$4\,480,000 \pm 10$	—	kHz

\* The ident. frequencies are also the maximum and minimum output frequencies of the encoder.

\*\* Values are valid for 75% colour bar saturation (EBU) ( $V_5 = \pm 250$  mV deviation from clamping level).

APPLICATION INFORMATION

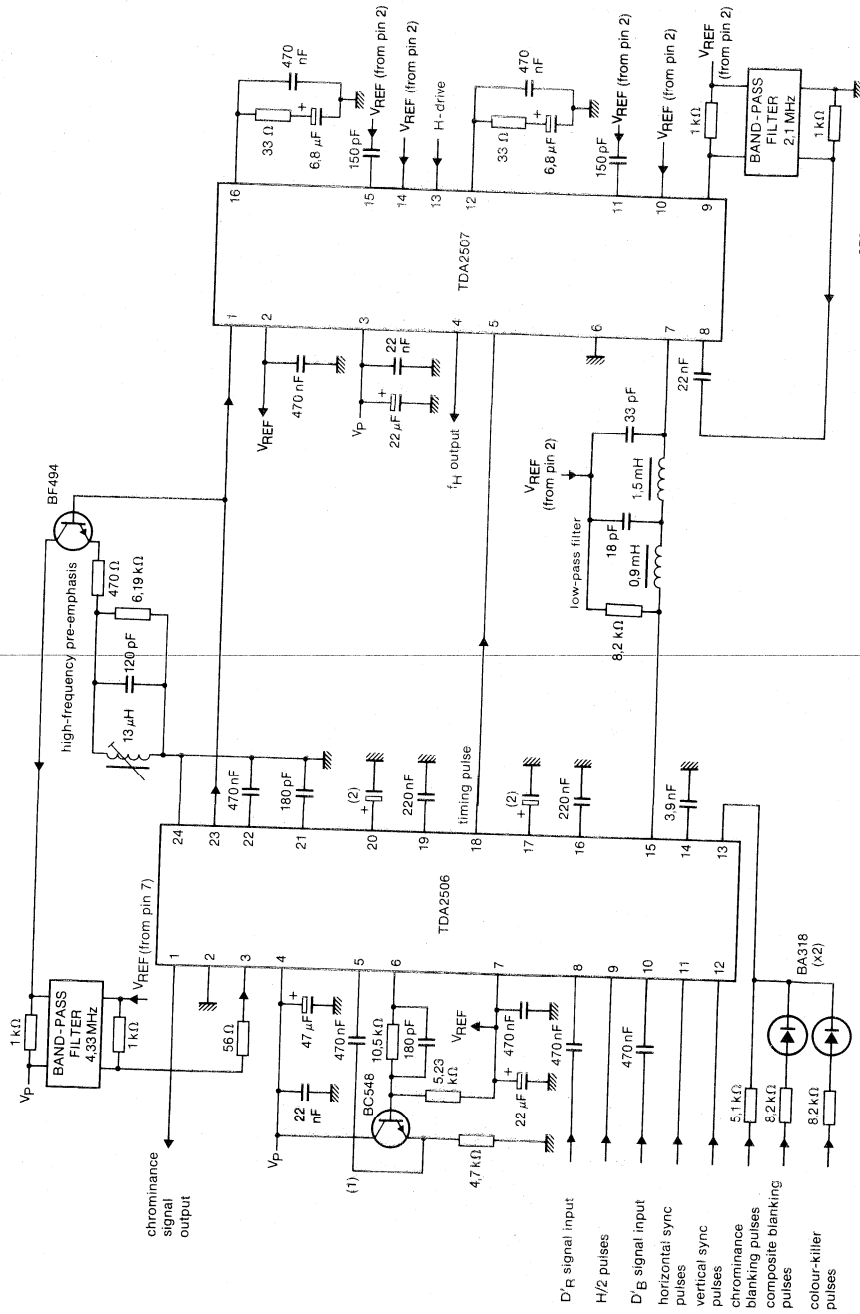

72B0557

(1) Signal amplitude for 75% colour bar (EBU) = 0.5 V (peak-to-peak value).  
 (2) For V<sub>p</sub> = 4.75 to 5.3 V, C<sub>17</sub> = C<sub>20</sub> = 0.68 μF; for V<sub>p</sub> > 5.3 V, C<sub>17</sub> = C<sub>20</sub> = 2.2 μF.

Fig. 6 Application using TDA2507 with PLL tuning; V<sub>p</sub> = 5 V.



## SECAM ENCODER

### GENERAL DESCRIPTION

The TDA2506 converts colour-difference signals ( $D'_R$  and  $D'_B$ ) into sequential, frequency modulated signals according to the SECAM system. The signals ( $D'_R$ ) and ( $D'_B$ ) are the colour difference signals before low-frequency pre-emphasis;  $D'_R = -1,9 (R-Y)$  and  $D'_B = +1,5(B-Y)$ . The circuit is intended for use in video cameras, games, recorders and players, PAL-SECAM transcoding circuits and SECAM test signal generators.

Synchronizing pulses required for operation of the TDA2506 may be obtained from a universal sync generator SAA1043 or other pulse generator. All pulses are to be active HIGH and are as follows:

- Horizontal sync pulses to pin 11
- Half-rate horizontal sync (H/2) pulses to pin 9
- Vertical sync pulses to pin 12
- Chrominance blanking pulses to pin 13 (may include colour-killer pulses)

Frequency modulation is performed in conjunction with modulator-controller TDA2507.

### Features

- Chrominance processor
- Vertical identification signal generator
- Timing pulse output to TDA2507
- Sample and hold circuit for control signal from TDA2507
- No adjustments of external components required (except high-frequency pre-emphasis (bell filter) stage)

### QUICK REFERENCE DATA

Supply voltage	V <sub>4-2</sub>	typ.	5 V
Supply current	I <sub>4</sub>	typ.	45 mA
Reference voltage	V <sub>7-2</sub> , V <sub>22-24</sub>	typ.	3,5 V
Operating ambient temperature range	T <sub>amb</sub>		-25 to +70 °C
Storage temperature range	T <sub>stg</sub>		-65 to +150 °C

### PACKAGE OUTLINES

24-lead mini-pack ; plastic (SO-24 ; SOT-137A).

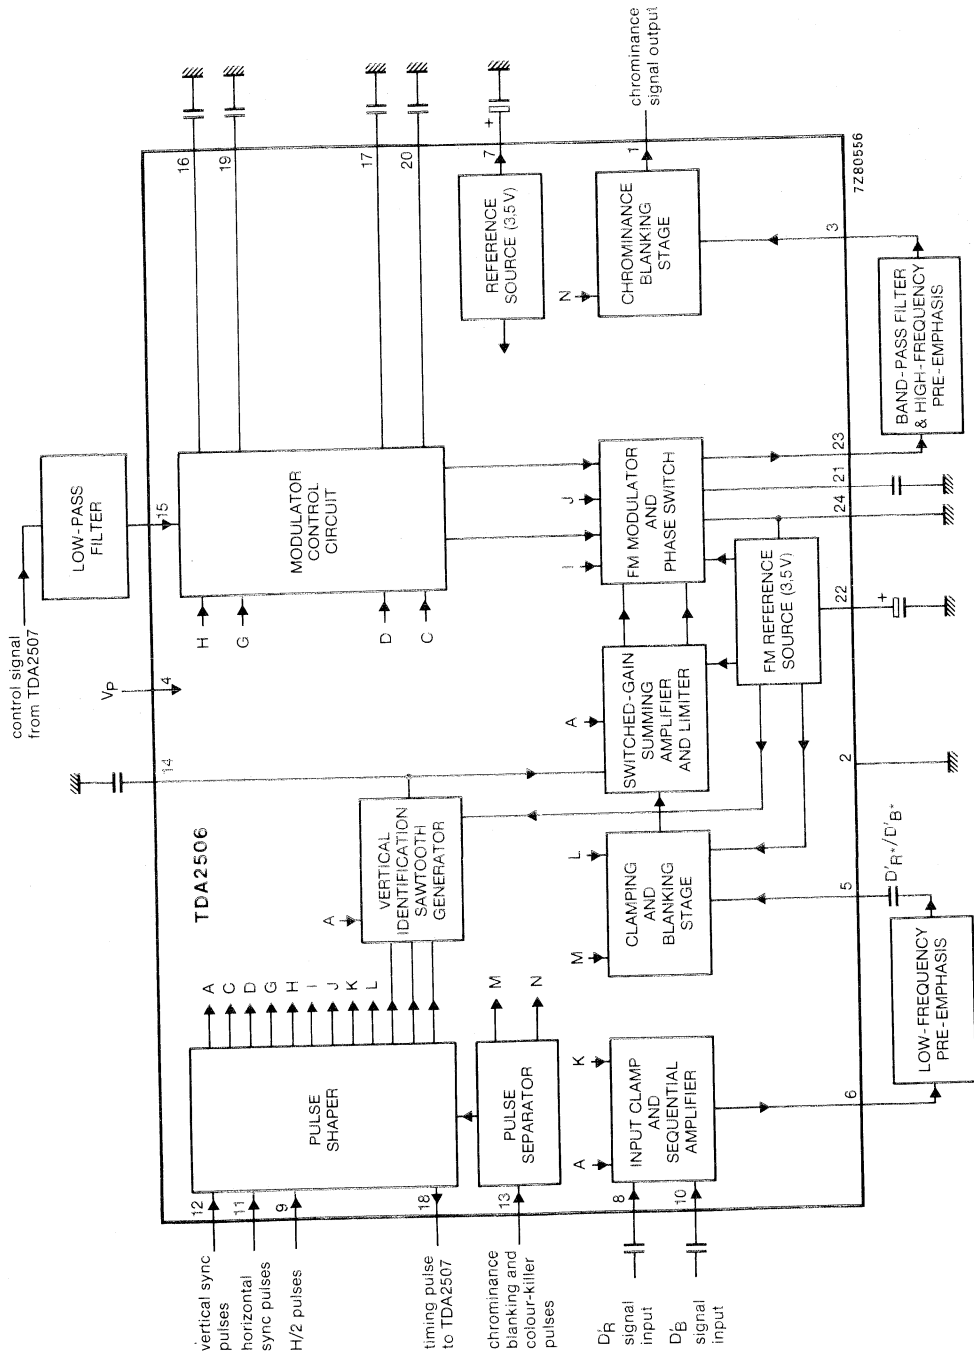


Fig. 1 Block diagram.

**Pin functions**

1. Chrominance signal output.
2. Ground.
3. Input to chrominance blanking stage from high-frequency pre-emphasis and band-pass filter.
4. Positive supply voltage.
5. Input to clamping and blanking stage from low-frequency pre-emphasis filter.
6. Output from sequential amplifier to low-frequency pre-emphasis filter.
7. Reference voltage output.
8. D'R signal input.
9. H/2 pulse input (required only if specific phase sequencing is desired).
10. D'B signal input.
11. Horizontal sync pulse input.
12. Vertical sync pulse input.
13. Chrominance blanking and colour-killer pulse input.
14. Capacitor for vertical identification sawtooth.
15. Control signal input from TDA2507 via low-pass filter.
16. 4 406,250 kHz frequency adjustment.
17. (R-Y) control.
18. Timing pulse output to TDA2507.
19. 4 250,000 kHz frequency adjustment.
20. (B-Y) control.
21. FM modulator tuning capacitor (fixed).
22. FM reference voltage output.
23. FM modulator output to high frequency pre-emphasis and band-pass filter.
24. Ground connection for FM modulator.

**FUNCTIONAL DESCRIPTION****Input clamp and sequential amplifier**

This circuit clamps the zero levels of the D'R and D'B input signals (pins 8 and 10) to the reference voltage from pin 7. The input signals are switched into the amplifier sequentially by an internally delayed H/2 waveform. The amplifier output at pin 6 is D'R when the delayed H/2 waveform is HIGH and D'B when it is LOW. The stage gain is 1,5.

**Clamping and blanking stage**

After external low-frequency pre-emphasis, the sequential D'R\* and D'B\* signals are returned to the IC at pin 5. The signal amplitude at pin 5 is typically 0,5 V (peak-to-peak value) for 75% colour bar (EBU). Black levels are clamped to the FM reference voltage (pin 22). Blanking takes place during the chrominance blanking pulse and, if required, during the video blanking and/or colour killing pulses.

FUNCTIONAL DESCRIPTION (continued)

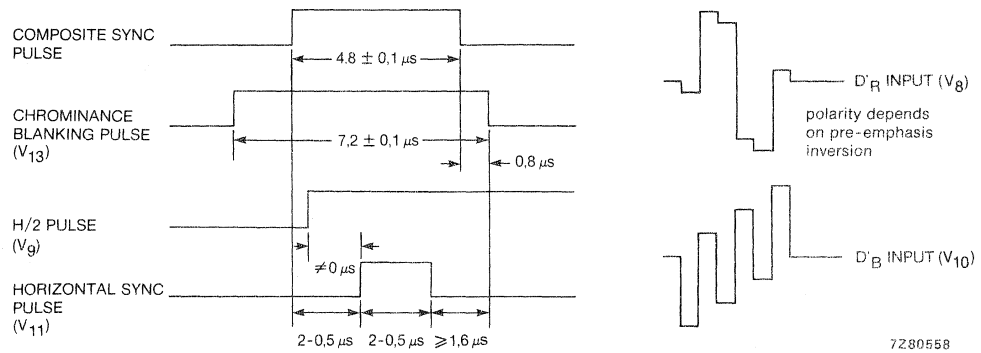
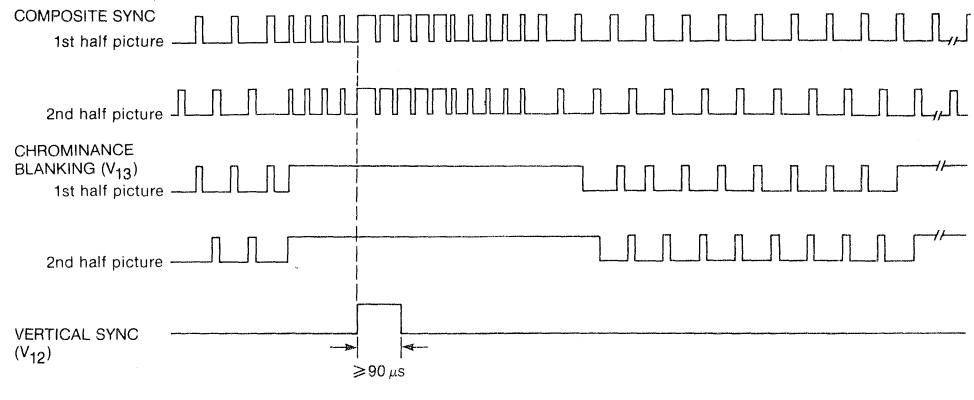


Fig. 2 Survey of input signals in relation to composite sync.

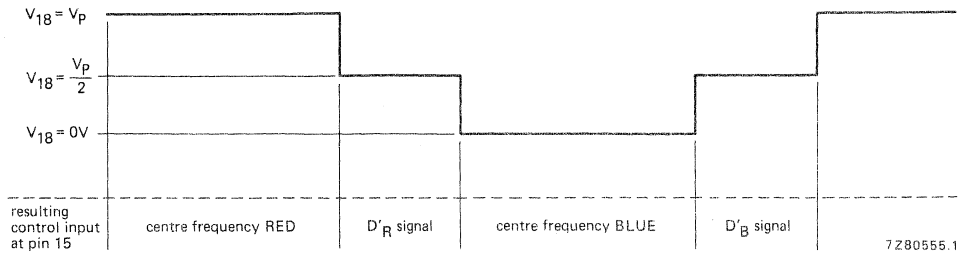


Fig. 3 Timing pulse output (pin 18) and resulting control input (pin 15).



**Switched-gain summing amplifier and limiter**

Inputs into the summing amplifier are the sequential  $D'R^*$  and  $D'B^*$  signals, the vertical identification sawtooth waveform and reference d.c. levels. The gain of the amplifier is switched by the internally delayed H/2 waveform to give the correct input amplitudes for the FM modulator ( $D'R^*$  gain =  $280/230 \times D'B^*$  gain). An offset is also introduced between the black levels of the  $D'R^*$  and  $D'B^*$  signals which corresponds to the upper and lower thresholds of the limiter.

**FM modulator and phase switch**

The FM modulator provides accurate FM modulation which follows the amplitude envelopes of the sequential  $D'R^*$  and  $D'B^*$  waveforms. The centre frequencies of 4 406,250 kHz for the  $D'R^*$  signal and 4 250,000 kHz for the  $D'B^*$  signal are controlled by d.c. levels from the sample and hold circuit (which in turn are controlled by the TDA2507). The upper and lower frequency limits are  $4\,756,250 \pm 35$  kHz and  $3\,900,000 \pm 35$  kHz:

Reference d.c. levels are switched within the FM modulator to define the starting phase of the modulator output (pin 23) at the initiation of each horizontal and vertical scan. The starting phase sequence is as follows:

- vertical scan (frame to frame)  $0^\circ, 180^\circ, 0^\circ, 180^\circ$ , repeating;
- horizontal scan (line to line)  $0^\circ, 0^\circ, 180^\circ, 0^\circ, 0^\circ, 180^\circ$ , repeating.

**Chrominance blanking stage**

The frequency modulated colour difference signals are passed via high-frequency pre-emphasis and band-pass filters to the chrominance blanking input at pin 3. The d.c. level of this input should be equal to the reference voltage at pin 7. Blanking occurs during the chrominance blanking pulse. The stage gain is 1,75.

**Vertical identification sawtooth generator**

Vertical sync, horizontal sync and chrominance blanking pulses are used to determine vertical identification (see Fig. 4). The vertical identification sawtooth generator is driven in opposite directions for identification signals IdR and IdB; the capacitor for the generator is connected at pin 14. If no vertical identification is required, pin 14 should be connected to the FM reference voltage at pin 22.

**Pulse shaper**

This stage develops all pulses that are required within the TDA2506 and also the timing pulses required for the modulator controller TDA2507 (see Fig. 3). Internal H/2 pulses are generated by a flip-flop working from the horizontal sync input (pin 11), this makes the H/2 input at pin 9 necessary only if it is required to lock the modulator into a specific phase sequence. If the H/2 input is not required, pin 9 should be connected to ground. A pulse separator at the chrominance blanking/colour-killer input (pin 13) allows this input to be used for blanking the sequential  $D'R^*/D'B^*$  signal.

**Sample and hold circuit**

This circuit provides reference voltages to the FM modulator which set the centre modulation frequencies for the sequential  $D'R^*$  and  $D'B^*$  signals. The reference voltage levels are supplied to pin 15 from the TDA2507 in a sequence that is time-related to  $D'R^*/D'B^*$  switching. The levels are sampled and then held for  $D'R^*$  using capacitors at pins 16 and 17, and for  $D'B^*$  using capacitors at pins 19 and 20.

FUNCTIONAL DESCRIPTION (continued)

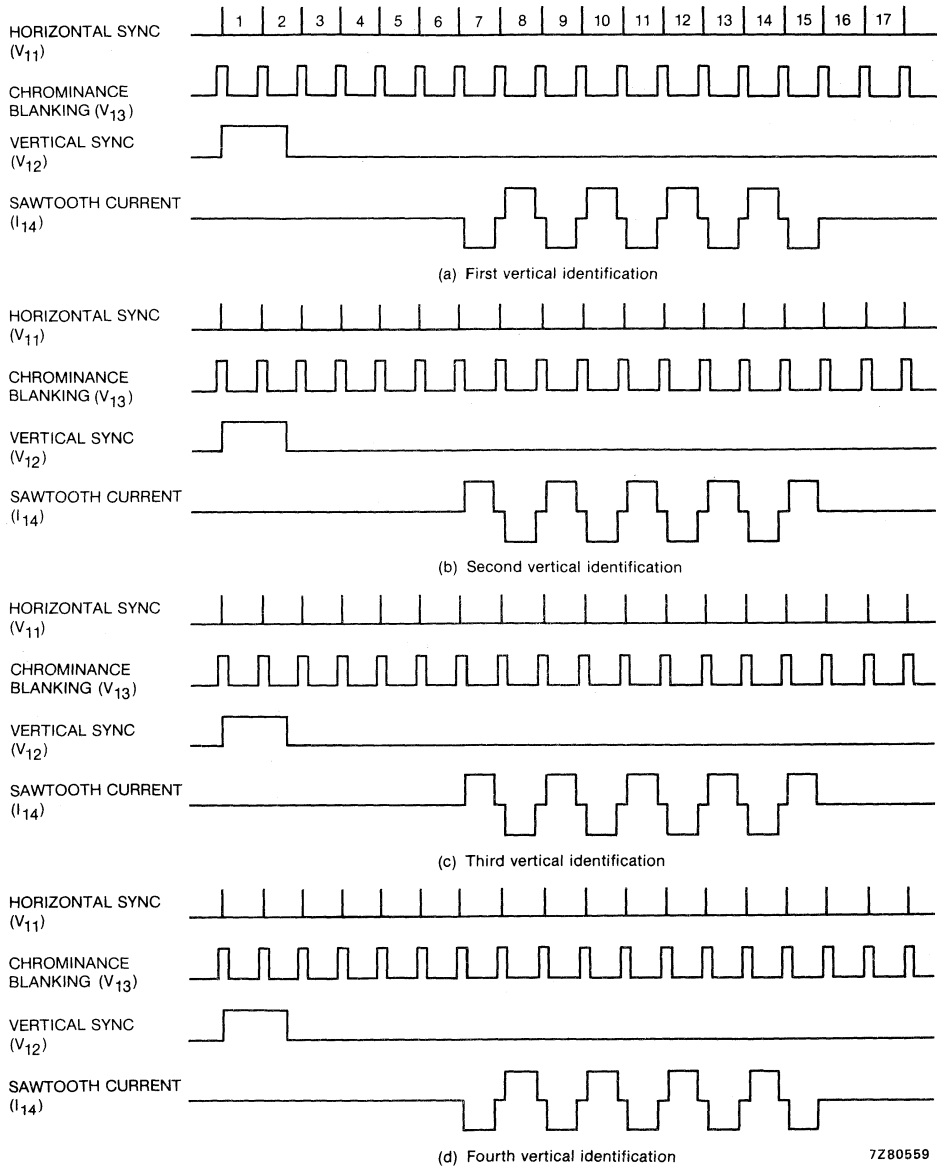


Fig. 4 Vertical identification generation.

**RATINGS**

Limiting values in accordance with the Absolute Maximum Rating system IEC 134

Supply voltage	V4-1	max. 13,2 V
Total power dissipation	$P_{tot}$	see Fig. 5
Operating ambient temperature range	$T_{amb}$	-25 to +70 °C
Storage temperature range	$T_{stg}$	-65 to +150 °C

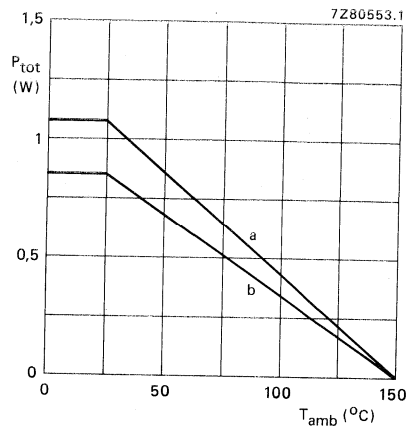


Fig. 5 Power derating curve.

- a = device mounted on a ceramic substrate.  
 b = device mounted on a printed circuit board.

## CHARACTERISTICS

$V_p = V_{4-2} = 5 \text{ V}$ ;  $T_{amb} = 25 \text{ }^\circ\text{C}$ ; all voltages are with reference to ground (pins 2 and 24); all currents stated are positive into the IC; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supplies</b>					
Supply voltage (pin 4)	$V_p = V_{4-2}$	4,75	5	7	V
Supply current	$I_p = I_4$	30	45	60	mA
Reference voltage (pin 7)	$V_{7-2}$	3,35	3,5	3,65	V
Reference voltage (pin 22)	$V_{22-24}$	3,35	3,5	3,65	V
<b>Pulse shaper</b> (pins 9,11 and 12, emitter follower inputs; pin 18, collector output)					
Bias current (pin 9,11,12)	$I_9, I_{11}, I_{12}$	—	—	10	$\mu\text{A}$
Input resistance (pin 9,11,12)	$R_9, R_{11}, R_{12}$	200	—	—	$\text{k}\Omega$
Input pulse amplitude (pin 9,11,12)	$V_9, V_{11}, V_{12}$	2	—	—	V
Timing pulse output (pin 18)					
high level	$V_{18}$	4,7	—	—	V
intermediate ( $V_p/2$ ) level	$V_{18}$	2,3	—	2,7	V
low level	$V_{18}$	—	—	0,3	V
<b>Pulse separator</b> (pin 13, emitter follower)					
Input resistance	$R_{13}$	100	—	—	$\text{k}\Omega$
Chrominance blanking pulse amplitude	$V_{13}$	3,6	—	—	V
$D'R^*/D'B^*$ blanking pulse amplitude (colour killing)	$V_{13}$	1,7	1,8	1,9	V
<b>Vertical identification</b>					
<b>sawtooth generator</b> (pin 14)					
Voltage clamping level	$V_{14}$	$V_{22}-7 \text{ mV}$	$V_{22}$	$V_{22}+7 \text{ mV}$	V
Ramp current (occurs in lines 7 to 15 after vertical sync)	$\pm I_{14}$	50	70	85	$\mu\text{A}$
Maximum voltage level	$V_{14}$	$V_{22}+0,6$	$V_{22}+0,7$	$V_{22}+0,8$	V
Minimum voltage level	$V_{14}$	$V_{22}-0,8$	$V_{22}-0,7$	$V_{22}-0,6$	V
Voltage level during line blanking	$V_{14}$	$V_{22}-7 \text{ mV}$	$V_{22}$	$V_{22}+7 \text{ mV}$	V
<b>Inputs <math>D'R^*</math>, <math>D'B^*</math></b> (pins 8 and 10)					
Signal level during clamping ( $I_8, I_{10} = \pm 50 \mu\text{A}$ )	$V_8, V_{10}$	$V_7-20 \text{ mV}$	$V_7$	$V_7+20 \text{ mV}$	V
Input bias current	$I_8, I_{10}$	—	—	1,5	$\mu\text{A}$

parameter	symbol	min.	typ.	max.	unit
<b>Sequential amplifier output</b> (pin 6) (Pins 8 and 10 a.c. coupled to fixed d.c. voltage)					
D.C. output	V <sub>6</sub>	1,6	$\frac{V_{7-10} \text{ mV}}{2}$	1,85	V
Output resistance	R <sub>6</sub>	—	12	16	Ω
Amplifier voltage gain (pin 8 or 10 to pin 6)	G <sub>8,10-6</sub>	1,46	1,5	1,54	
<b>Clamping and blanking stage</b> (pin 5)					
Input voltage (clamped; I <sub>5</sub> = ± 50 μA)	V <sub>5</sub>	V <sub>22</sub> -10 mV	V <sub>22</sub>	V <sub>22</sub> +10 mV	V
Input bias current	I <sub>5</sub>	—	—	1,0	μA
<b>Modulator control circuit</b> (pin 15, buffer amplifier non-inverting input)					
Bias current	I <sub>15</sub>	—	—	1,25	μA
Permitted input signal d.c. levels	V <sub>15</sub>	2	—	4,3	V
<b>FM modulator output</b> (pin 23, emitter follower)					
Output resistance	R <sub>23</sub>	—	50	70	Ω
High d.c. output level at V <sub>21</sub> = 4 V	V <sub>23</sub>	V <sub>22</sub> -0,85	—	V <sub>22</sub> -0,7	V
Output signal amplitude	V <sub>23</sub>	0,9	1,0	1,1	V

## CHARACTERISTICS (Continued)

parameter	symbol	min.	typ.	max.	unit
<b>Chrominance blanking stage</b> (pin 3, emitter follower input; pin 1, amplifier output)					
Input current	$I_3$	—	—	15	$\mu\text{A}$
Input resistance	$R_3$	300	—	—	$\text{k}\Omega$
Required d.c. level of input signal	$V_3$	—	$V_7$	—	V
Output resistance	$R_1$	—	—	5	$\Omega$
Temperature coefficient of output d.c. level	TC	—	1,8	—	mV/K
Amplifier gain	$G_{3-1}$	1,70	1,75	1,80	
Output d.c. level during blanking ( $V_{13} = \text{HIGH}$ )	$V_1$	$V_7 - 0,76$	$V_7 - 0,70$	$V_7 - 0,60$	V
Output d.c. level unblanked ( $V_3 = V_7; V_{13} = \text{LOW}$ )	$V_1$	$V_7 - 0,76$	$V_7 - 0,70$	$V_7 - 0,60$	V

## A.C. CHARACTERISTICS


Values are valid for TDA2506 operating with TDA2507. Horizontal frequency ( $f_H$ ) = 15 625 Hz.

parameter	symbol	min.	typ.	max.	unit
Centre frequency RED	$f_{0R}$	—	$4\,406,250 \pm 2$	—	kHz
Centre frequency BLUE	$f_{0B}$	—	$4\,250,000 \pm 2$	—	kHz
Ident. frequency RED *	$f_{IdR}$	—	$4\,756,250 \pm 35$	—	kHz
Ident. frequency BLUE *	$f_{IdB}$	—	$3\,900,000 \pm 35$	—	kHz
Minimum frequency RED **	$-f_R$	—	$4\,126,250 \pm 10$	—	kHz
Maximum frequency RED **	$+f_R$	—	$4\,686,250 \pm 10$	—	kHz
Minimum frequency BLUE **	$-f_B$	—	$4\,020,000 \pm 10$	—	kHz
Maximum frequency BLUE **	$+f_B$	—	$4\,480,000 \pm 10$	—	kHz

\* The ident. frequencies are also the maximum and minimum output frequencies of the encoder.

\*\* Values are valid for 75% colour bar saturation (EBU) ( $V_5 = \pm 250$  mV deviation from clamping level).

APPLICATION INFORMATION

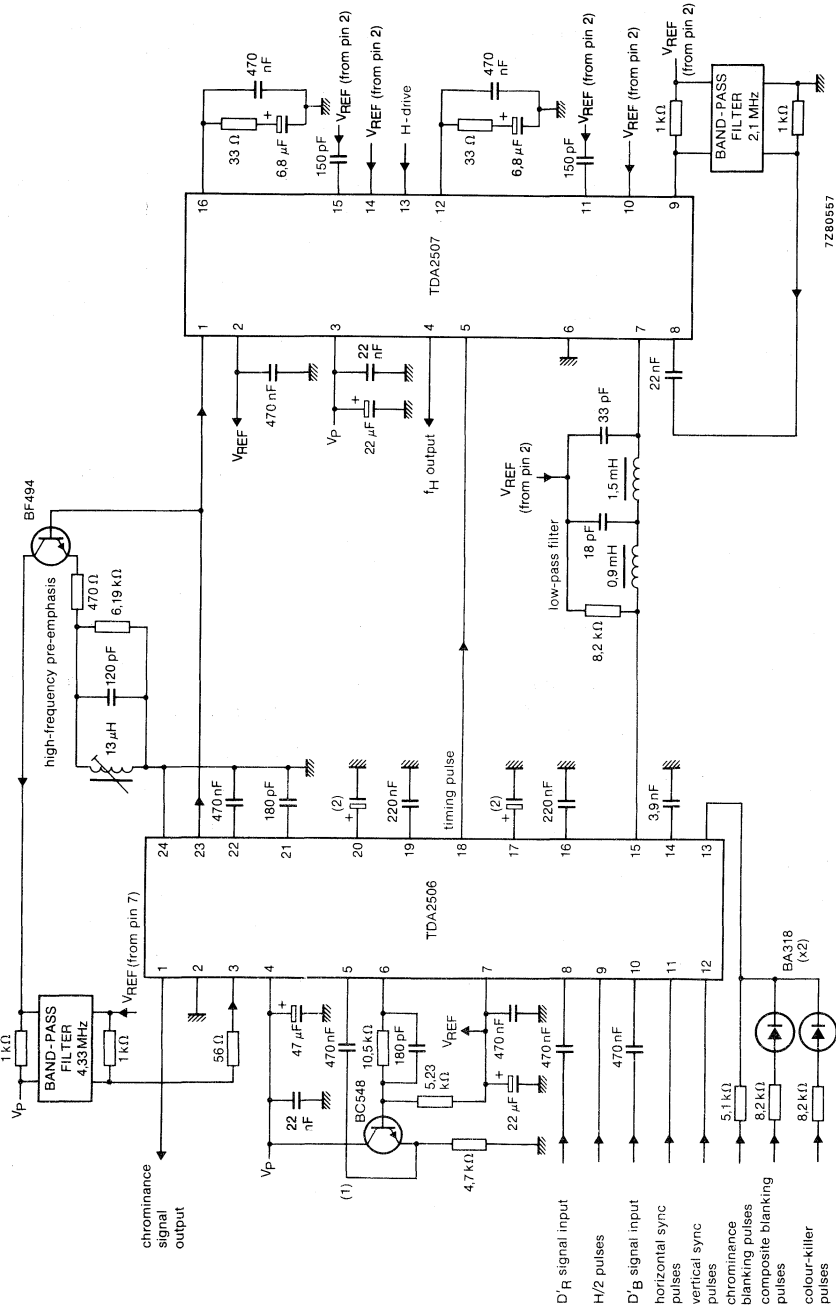

(1) Signal amplitude for 75% colour bar (EBU) = 0,5 V (peak-to-peak value).

(2) For  $V_p = 4,75$  to  $5,3$  V,  $C_{17} = C_{20} = 0,68 \mu\text{F}$ ; for  $V_p > 5,3$  V,  $C_{17} = C_{20} = 2,2 \mu\text{F}$ .

Fig. 6 Application using TDA2507 with PLL tuning:  $V_p = 5$  V.





## FM MODULATOR CONTROLLER

## GENERAL DESCRIPTION

The TDA2507 accepts FM signals that are sequentially modulated by two alternating subcarrier frequencies (SECAM signals) and provides sequential d.c. output levels to control the FM modulator.

The IC is intended for use with the SECAM encoder TDA2506 but can be adapted for other applications. Timing reference pulses from the modulator are required.

Two frequency reference phase-lock loops are contained within the IC; one for 4,406 25 MHz, and one for 4,250 MHz. Other frequencies can be accomplished by using external reference sources.

## QUICK REFERENCE DATA

---

Supply voltage	$V_p = V_{3-6}$	typ.	5 V
Supply current at $V_p = 5$ V and with both PLL circuits functioning	$I_3$	typ.	40 mA
Reference voltage	$V_{2-6}$	typ.	3,5 V
Operating ambient temperature range	$T_{amb}$		-25 to +70 °C
Storage temperature range	$T_{stg}$		-65 to +150 °C

---

## PACKAGE OUTLINES

TDA2507 : 16-lead DIL; plastic (with internal heat spreader) (SOT-38).

TDA2507T: 16-lead mini-pack; plastic (SO-16L; SOT-162A).

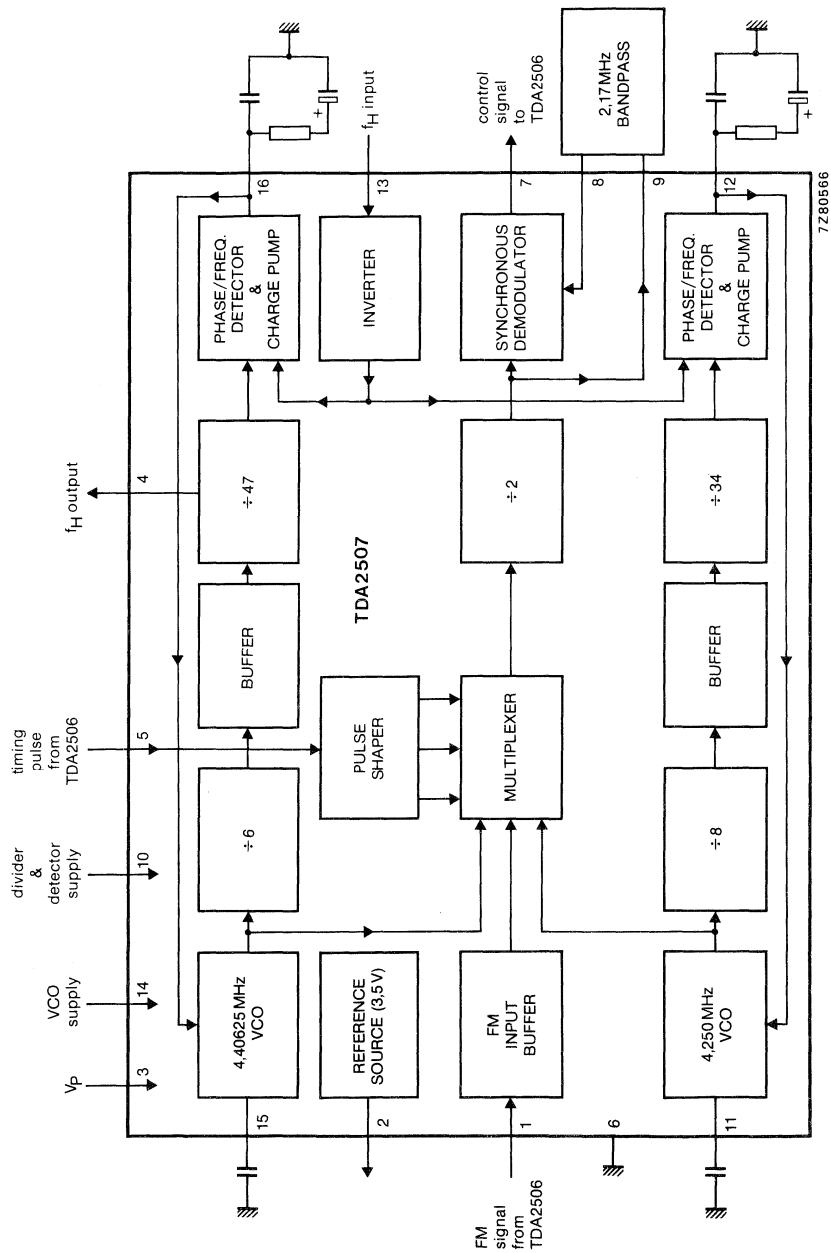


Fig. 1 Block diagram.

**Pin functions**

1. FM signal input (from TDA2506 pin 23).
2. Reference voltage output.
3. Positive supply voltage.
4. Horizontal sync output ( $f_H = 4\,406,250/282 = 15,625$  kHz).
5. Timing pulse input (from TDA2506 pin 18).
6. Ground.
7. Control signal output to TDA2506 via low-pass filter.
8. Input to synchronous demodulator from band-pass filter.
9. Output to band-pass filter.
10. Supply voltage for the divider stages and phase/frequency detectors of the two phase-lock loops.
11. Tuning capacitor for the 4,250 MHz reference oscillator.
12. Filter for the phase/frequency detector of the 4,250 MHz phase-lock loop.
13. Horizontal sync input ( $f_H$ ).
14. Supply voltage for the two reference oscillators.
15. Tuning capacitor for the 4,406 25 MHz reference oscillator.
16. Filter for the phase/frequency detector of the 4,406 25 MHz phase-lock loop.

**FUNCTIONAL DESCRIPTION****Phase-lock loops**

The two phase-lock loops each comprise a voltage-controlled reference oscillator, two frequency divider stages and a phase/frequency detector circuit. The loops are closed by charge pumping the reference oscillators from the phase/frequency detector outputs. The centre frequencies of the loops are set by external capacitors at pin 15 (4,406 25 MHz) and pin 11 (4,250 MHz). The divider stages which follow the reference oscillators reduce the frequencies of both the loops to 15,625 kHz ( $f_H$ ) at their respective inputs to the phase/frequency detectors. The reference signals to both phase/frequency detectors are obtained from the horizontal sync input at pin 13.

The divider and phase/frequency detector circuits can be switched off by connecting pin 10 to ground. This leaves only the VCO of each PLL in circuit and allows external signals to be injected at pins 15 and 11, or crystals to be used for tuning the oscillators.

The accuracy of crystal tuning using only one crystal can be obtained by connecting pins 10, 14 and 16 to the reference voltage at pin 2 and connecting a 4,406 25 MHz crystal to pin 15. The 4,250 MHz PLL will follow the crystal-derived  $f_H$  reference from pin 4 via pin 13 and its phase/frequency detector.

**Multiplexer and pulse shaper**

The multiplexer receives the 4,406 25 and 4,250 MHz reference frequencies from the two VCOs and the FM signals  $D'R^*$  and  $D'B^*$  from the TDA2506 modulator. The signals are gated one at a time to the multiplexer output in a sequence determined by the timing pulses from TDA2506. The levels of the timing pulses (pin 5) are used in the pulse shaper to generate enable pulses for the multiplexer (Fig. 2a + b). The multiplexer output sequence is as follows:

4,406 25 MHz (2 lines);  $D'R^*$  FM signal (1 line); 4,250 MHz (2 lines);  $D'B^*$  FM signal (1 line); repeating. The selection of  $D'R^*$  or  $D'B^*$  FM signal is a feature of the timing of the input at pin 5.

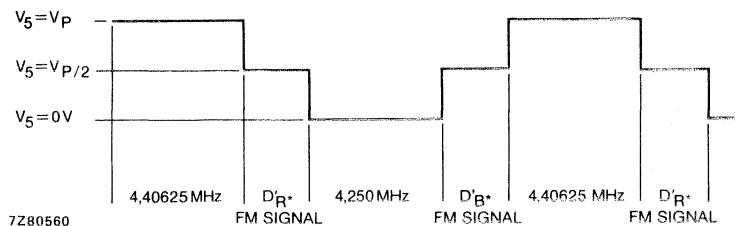


Fig. 2a Timing pulse waveform showing multiplexer output sequence.

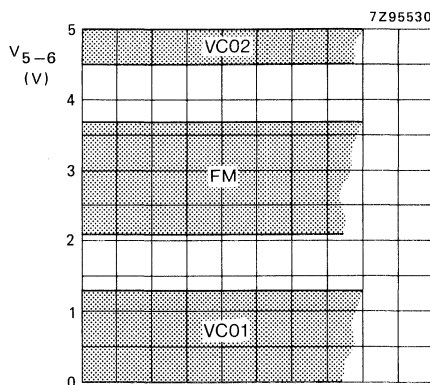


Fig. 2b Graph showing switching-levels of the timing pulse at pin 5. Duty cycle and timing not important.

### Divide-by-two stage and synchronous demodulator

The divide-by-two stage halves the frequencies present in the multiplexer output and equalizes the amplitude and pulse shapes of the sequential signals.

Demodulation of the multiplexed signal is performed by filtering the signal via a 2,17 MHz band-pass filter (between pins 8 and 9) and using this filtered signal as a synchronous switch for the main signal. The d.c. level of the signal from pin 9 is referred externally to the reference voltage from pin 2. An external low-pass filter is required for the output signal from pin 7.

### RATINGS

Limiting values in accordance with the Absolute Maximum Rating system IEC 134

Supply voltage	V <sub>3-6</sub>	max.	13,2 V
Total power dissipation	P <sub>tot</sub>	see Fig. 3	
Operating ambient temperature range	T <sub>amb</sub>		-25 to +70 °C
Storage temperature range	T <sub>stg</sub>		-65 to +150 °C

## CHARACTERISTICS

$V_P = V_{3-6} = 5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; all voltages are with reference to ground; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supplies</b>					
Supply voltage (pin 3)	$V_P = V_{3-6}$	4,75	5	7	V
Supply current at $V_{14} = V_{10} = V_2$	$I_P = I_3$	—	35	—	mA
Supply current at $V_{14} = V_2$	$I_P = I_3$	—	20	—	mA
Reference voltage (pin 2)	$V_{2-6}$	3,38	3,5	3,6	V
<b>Phase-lock loops</b>					
D.C. level at pins 11 and 15 (oscillator tuning capacitor outputs)	$V_{11}, V_{15}$	2,4	2,6	2,8	V
Amplitude of oscillation at pins 11 and 15 (peak-to-peak value)	$V_{11(p-p)}$ } $V_{15(p-p)}$ }	—	130	—	mV
Current into pins 11 and 15 when $V_{12}, V_{16} = 1,5 \text{ V}$ (see Fig. 4)	$I_{11}, I_{15}$	—	130	—	$\mu\text{A}$
Limiting values for VCO control voltages at pins 12 and 16	$V_{12}, V_{16}$	0,8	—	1,9	V
Output resistance at pin 4 ( $f_H$ output); $V_4 = \text{HIGH}$	$R_4$	5,1	6,8	8,5	$\text{k}\Omega$
Input resistance at pin 13 ( $f_H$ input)	$R_{13}$	200	—	—	$\text{k}\Omega$
Amplitude of $f_H$ pulse required at pin 13 (duty factor and timing are not important)	$V_{13}$	2	—	—	V
<b>FM input buffer</b>					
Input resistance at pin 1 (FM signal input)	$R_1$	180	—	—	$\text{k}\Omega$
Switching level of FM input	$V_1$	2,2	2,3	2,4	V
Required input amplitude	$V_1$	0,5	—	2,0	V
<b>Pulse shaper input</b>					
Input resistance at pin 5 (timing pulse input)	$R_5$	200	—	—	$\text{k}\Omega$
<b>Demodulator</b>					
Sink current at pin 9 into divide-by-two circuit; $V_9 = \text{LOW}$	$I_9$	0,6	0,9	1,2	mA
Demodulator input bias voltage at pin 8	$V_8$	1,60	1,68	1,76	V
Demodulator output current from pin 7 (see Fig. 5)					
output current at 'A'	$-I_7$	0,6	0,9	1,2	mA
output current at 'B'	$+I_7$	1,2	0,9	0,6	mA

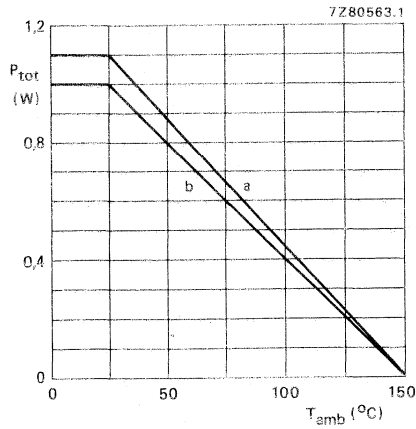


Fig. 3 Power derating curve.

a = device mounted on a ceramic substrate.  
b = device mounted on a printed circuit board.

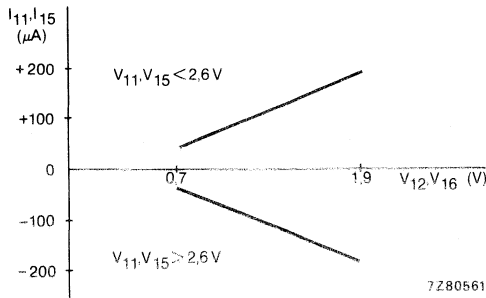


Fig. 4 Graph showing current into pins 11 and 15 against voltage at pins 12 and 16 (typical values).

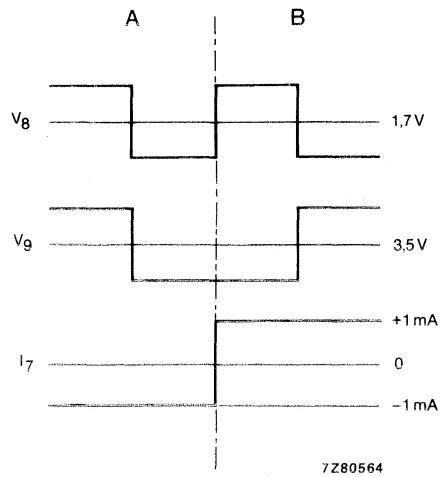


Fig. 5 Graph showing demodulator output current from pin 7 (typical values).

APPLICATION INFORMATION

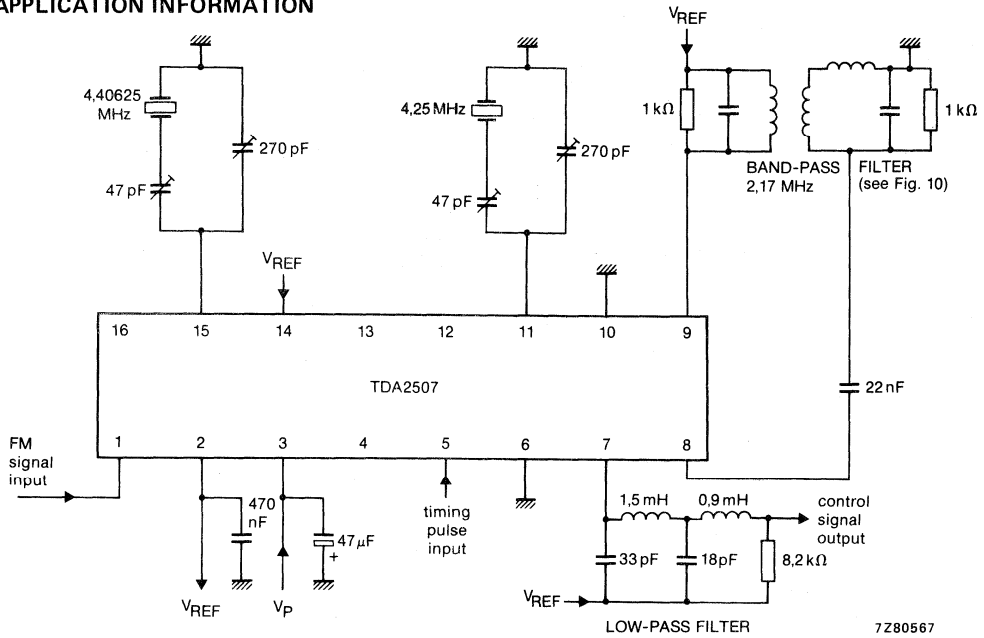


Fig. 6 Application of TDA2507 using two crystals for tuning;  $V_P = 5$  V.


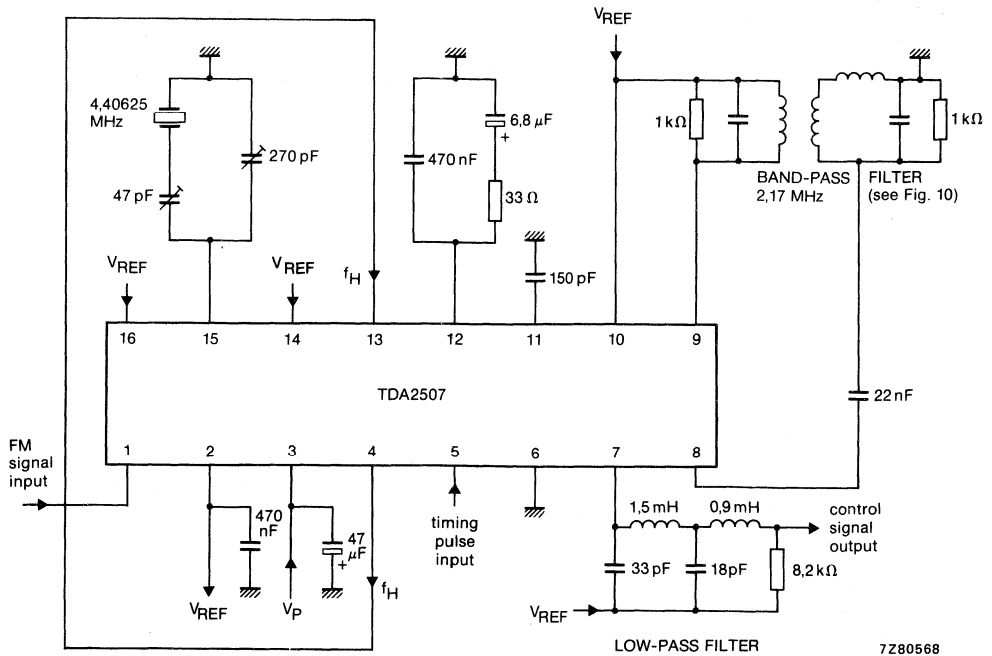


Fig. 7 Application of TDA2507 using single crystal tuning;  $V_P = 5$  V.

APPLICATION INFORMATION (continued)

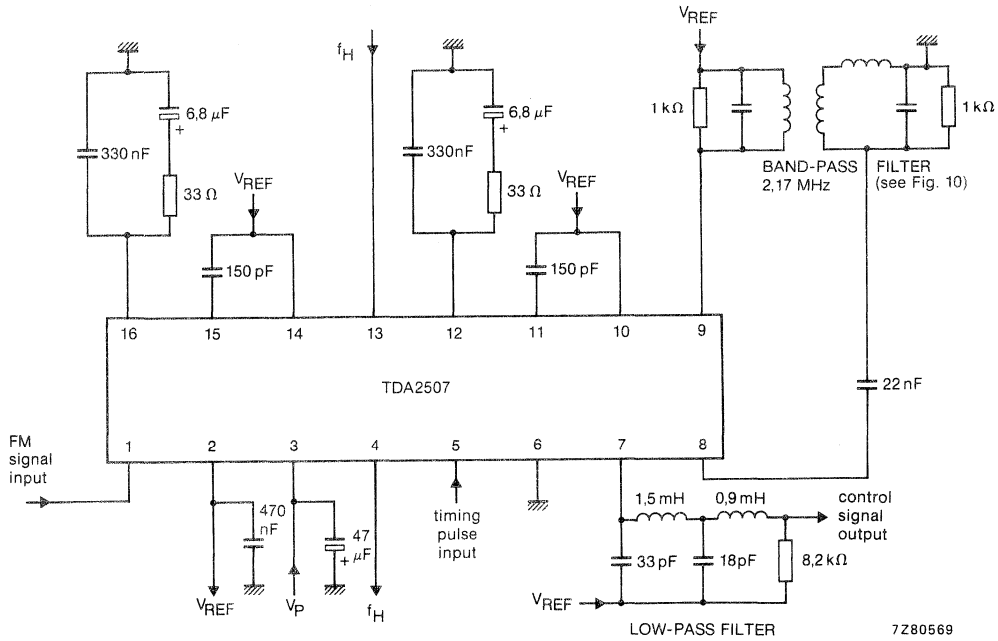

7280569

Fig. 8 Application of TDA2507 using PLL tuning;  $V_p = 5\text{ V}$ .

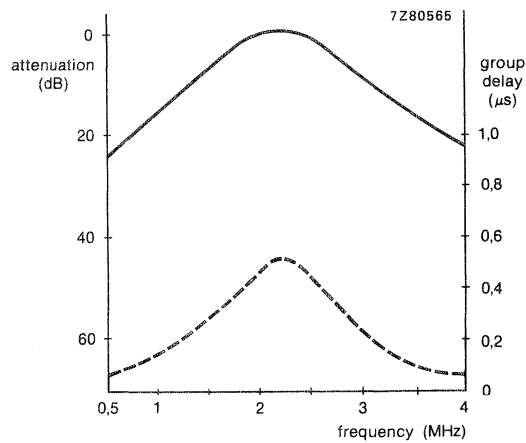


Fig. 9 Typical response of 2,17 MHz band-pass filter.

Note

See data sheet TDA2506 for TDA2506/TDA2507 application using PLL tuning.



## TELEVISION I.F. AMPLIFIER AND DEMODULATOR

The TDA2540 is an i.f. amplifier and demodulator circuit for colour and black and white television receivers using n-p-n tuners.

It incorporates the following functions:

- gain-controlled wide-band amplifier, providing complete i.f. gain
- synchronous demodulator
- white spot inverter
- video preamplifier with noise protection
- a.f.c. circuit which can be switched on/off by a d.c. level, e.g. during tuning
- a.g.c. circuit with noise gating
- tuner a.g.c. output (n-p-n tuners)
- VCR switch, which switches off the video output; e.g. for insertion of a VCR playback signal

## QUICK REFERENCE DATA

Supply voltage	$V_{11-13}$	typ.	12 V
Supply current	$I_{11}$	typ.	50 mA
I.F. input voltage at $f = 38,9$ MHz (r.m.s. value)	$V_{1-16}$ (rms)	typ.	100 $\mu$ V
Video output voltage (white at 10% of top sync)	$V_{12(p-p)}$	typ.	2,7 V
I.F. voltage gain control range	$G_v$	typ.	64 dB
Signal-to-noise ratio at $V_i = 10$ mV	S/N	typ.	58 dB
A.F.C. output voltage swing for $\Delta f = 100$ kHz	$\Delta V_{5-13}$	typ.	10 V

## PACKAGE OUTLINES

TDA2540 : 16-lead DIL; plastic (SOT-38).

TDA2540Q: 16-lead QIL; plastic (SOT-58).

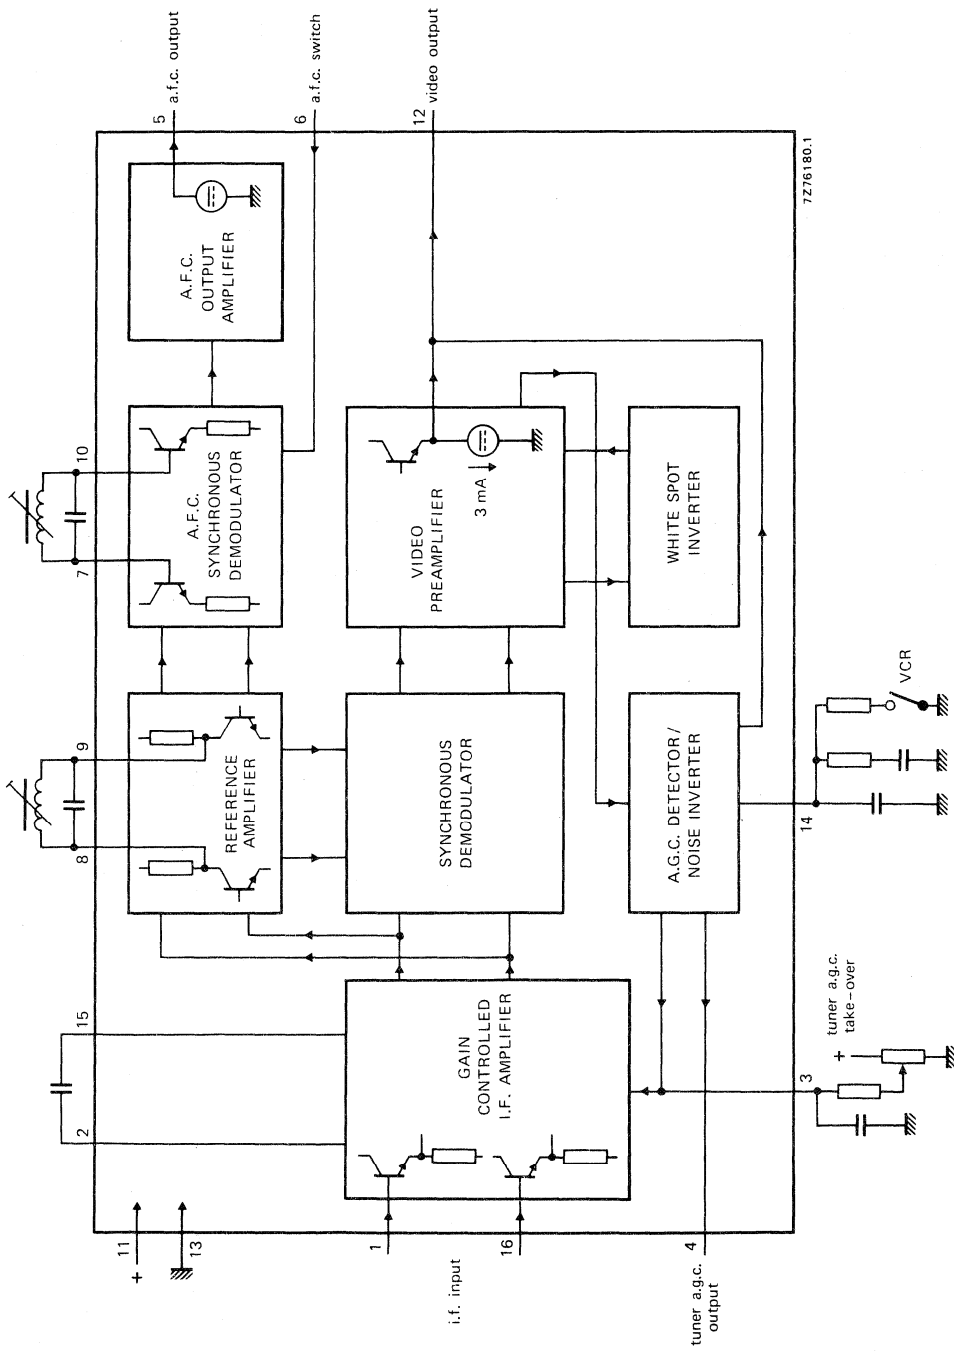


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_{11-13}$	max.	13,2 V
Tuner a.g.c. voltage	$V_{4-13}$	max.	12 V
Total power dissipation	$P_{tot}$	max.	900 mW
Storage temperature	$T_{stg}$		-55 to + 125 °C
Operating ambient temperature	$T_{amb}$		-25 to + 60 °C

**CHARACTERISTICS** (measured in Fig. 5)

Supply voltage range	$V_{11-13}$	typ.	12 V
			10,2 to 13,2 V

The following characteristics are measured at  $T_{amb} = 25$  °C;  $V_{11-13} = 12$  V;  $f = 38,9$  MHz

I.F. input voltage for onset of a.g.c. (r.m.s. value)	$V_{1-16(rms)}$	typ.	100 $\mu$ V
		<	150 $\mu$ V
Differential input impedance	$ Z_{1-16} $	typ.	2 k $\Omega$ in parallel with 2 pF
Zero-signal output level	$V_{12-13}$	typ.	$6 \pm 0,3$ V*
Top sync output level	$V_{12-13}$	typ.	3,07 V
			2,9 to 3,2 V
I.F. voltage gain control range	$G_V$	typ.	64 dB
Bandwidth of video amplifier (3 dB)	B	typ.	6 MHz
Signal-to-noise ratio at $V_i = 10$ mV	S/N	typ.	58 dB**
Differential gain	dG	typ.	4 %
		<	10 %
Differential phase	$d\varphi$	typ.	2°
		<	10°

\* So-called 'projected zero point', e.g. with switched demodulator.

$$** S/N = \frac{V_o \text{ black-to-white}}{V_{n(rms)} \text{ at } B = 5 \text{ MHz}}$$

CHARACTERISTICS (continued)

Intermodulation at 1,1 MHz: blue\*


> 46 dB  
typ. 60 dB

yellow\*

> 46 dB  
typ. 50 dB

at 3,3 MHz\*\*

> 46 dB  
typ. 54 dB

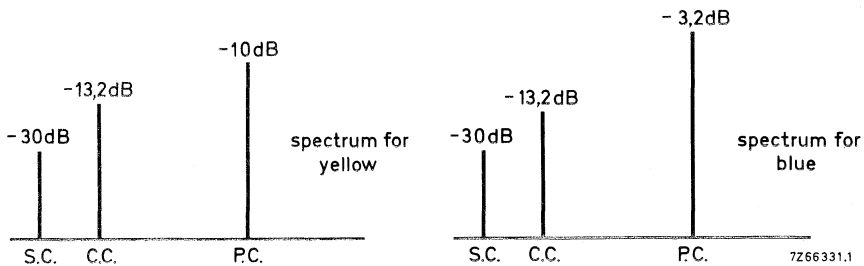

S.C.: sound carrier level  
C.C.: chrominance carrier level  
P.C.: picture carrier level } with respect to top sync level

Fig. 2 Input conditions for intermodulation measurements; standard colour bar with 75% contrast.

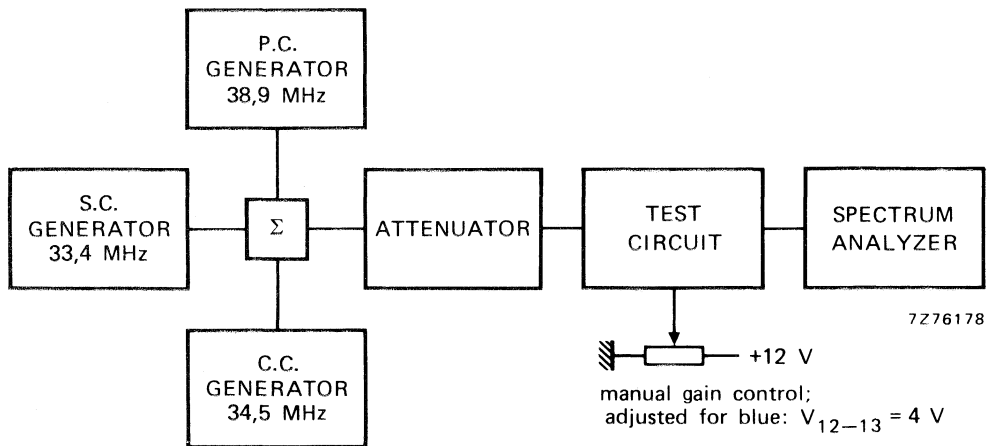


Fig. 3 Test set-up for intermodulation.

$$* 20 \log \frac{V_o \text{ at } 4,4 \text{ MHz}}{V_o \text{ at } 1,1 \text{ MHz}} + 3,6 \text{ dB.}$$

$$** 20 \log \frac{V_o \text{ at } 4,4 \text{ MHz}}{V_o \text{ at } 3,3 \text{ MHz}}$$

Carrier signal at video output	typ. 4 mV < 30 mV
2nd harmonic of carrier at video output	typ. 20 mV < 30 mV
White spot inverter threshold level (Fig. 4)	typ. 6,6 V
White spot insertion level (Fig. 4)	typ. 4,7 V
Noise inverter threshold level (Fig. 4)	typ. 1,8 V
Noise insertion level (Fig. 4)	typ. 3,8 V
External video switch (VCR) switches off the output at:	V <sub>14-13</sub> < 1,1 V

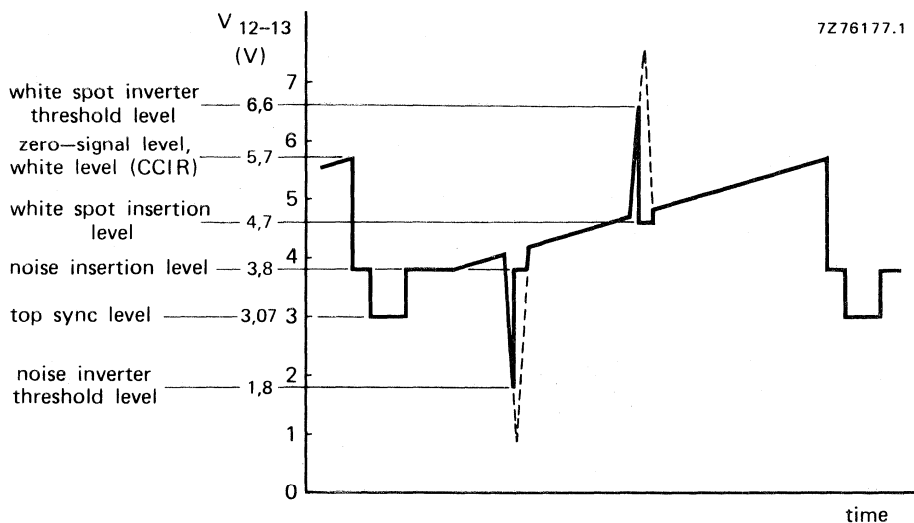


Fig. 4 Video output waveform showing white spot and noise inverter threshold levels.

Tuner a.g.c. output current range	I <sub>4</sub>	10 to 0 mA
Tuner a.g.c. output voltage at I <sub>4</sub> = 10 mA	V <sub>4-13</sub>	< 0,3 V
Tuner a.g.c. output leakage current V <sub>14-13</sub> = 5 V; V <sub>4-13</sub> = 12 V	I <sub>4</sub>	< 15 μA
Maximum a.f.c. output voltage swing	ΔV <sub>5-13</sub>	> 10 V typ. 11 V
Detuning for a.f.c. output voltage swing of 10 V	Δf	typ. 100 kHz < 200 kHz
A.F.C. zero-signal output voltage (minimum gain)	V <sub>5-13</sub>	typ. 6 V 4 to 8 V
A.F.C. switches on at:	V <sub>6-13</sub>	> 3,2 V
A.F.C. switches off at:	V <sub>6-13</sub>	< 1,5 V

APPLICATION INFORMATION

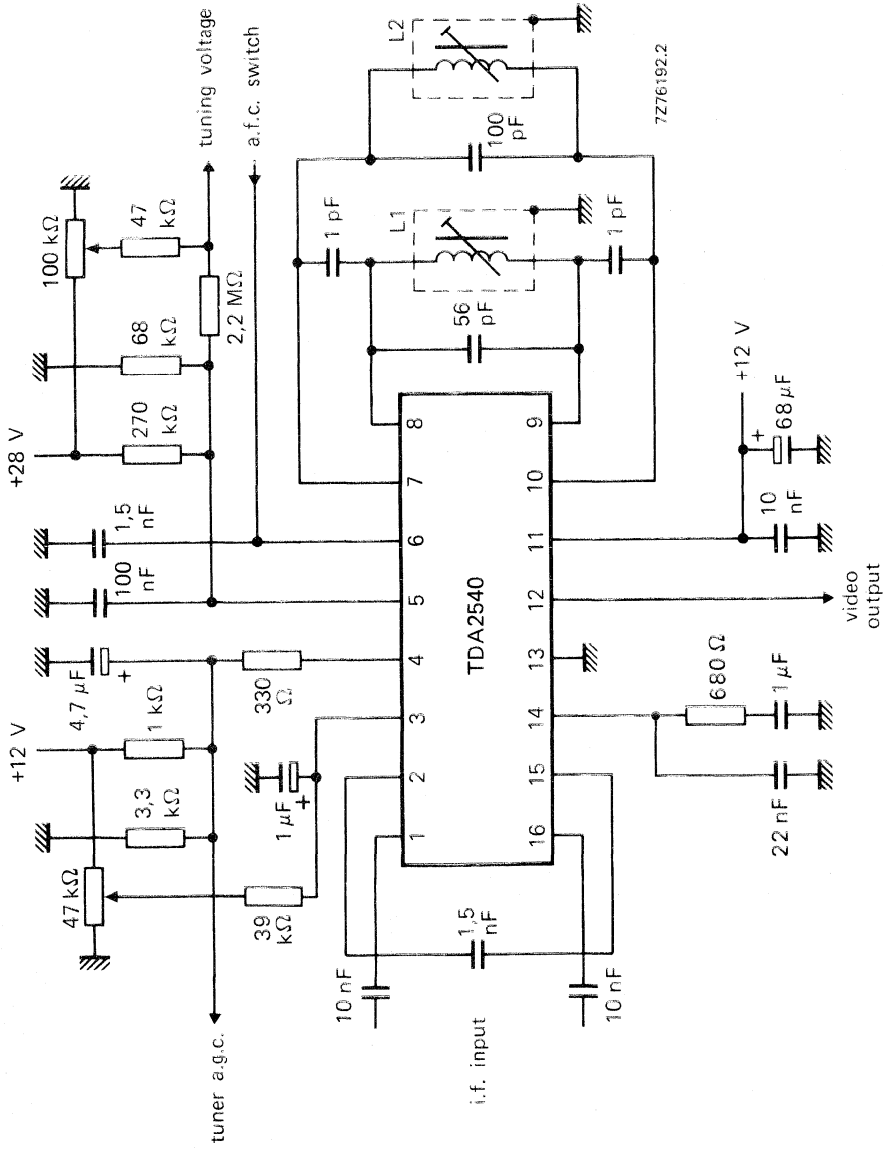


Fig. 5 Typical application circuit diagram; Q of L1 and L2  $\approx$  80;  $f = 38.9$  MHz.

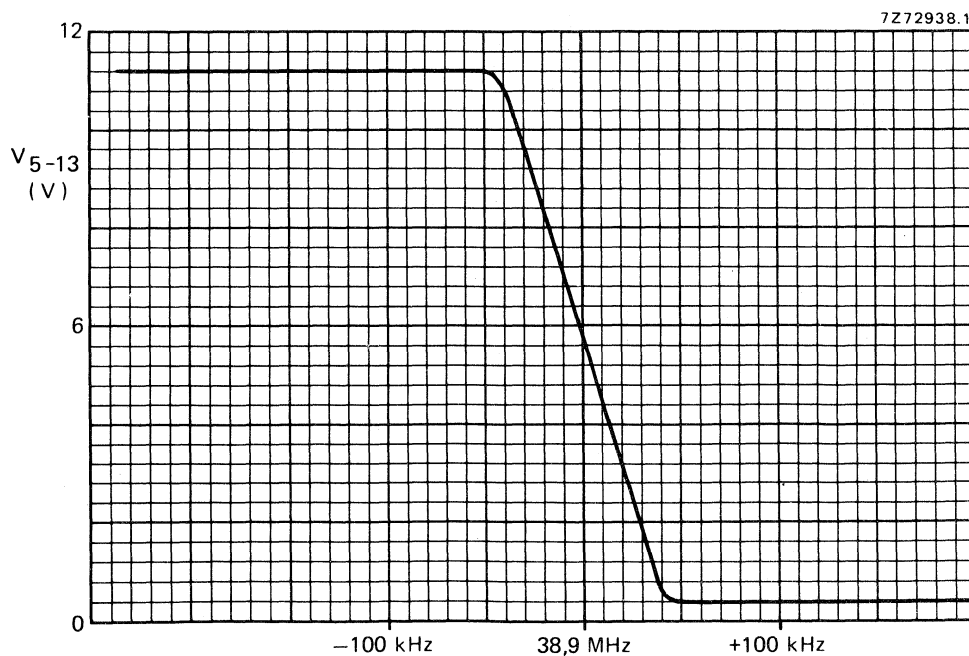
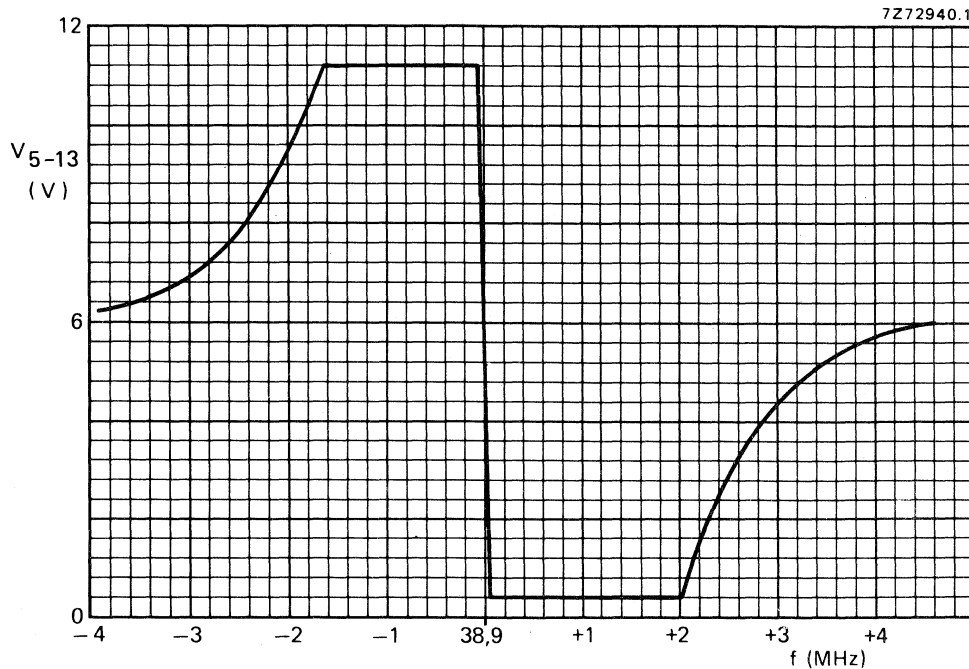


Fig. 6 A.F.C. output voltage ( $V_{5-13}$ ) as a function of the frequency.

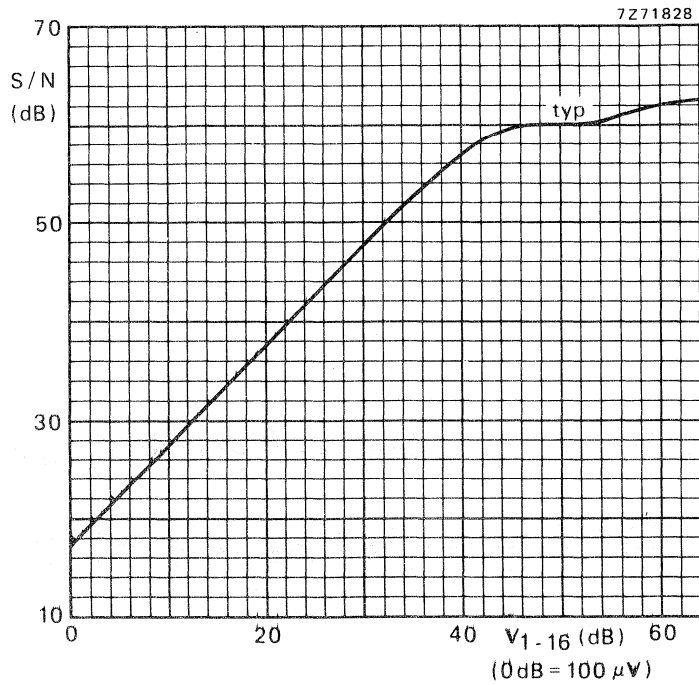


Fig. 7 Signal-to-noise ratio as a function of the input voltage ( $V_{1-16}$ ).



## TELEVISION I.F. AMPLIFIER AND DEMODULATOR

The TDA2541 is an i.f. amplifier and demodulator circuit for colour and black and white television receivers using p-n-p tuners.

It incorporates the following functions:

- gain-controlled wide-band amplifier, providing complete i.f. gain
- synchronous demodulator
- white spot inverter
- video preamplifier with noise protection
- a.f.c. circuit which can be switched on/off by a d.c. level, e.g. during tuning
- a.g.c. circuit with noise gating
- tuner a.g.c. output (p-n-p tuners)
- VCR switch, which switches off the video output; e.g. for insertion of a VCR playback signal.


### QUICK REFERENCE DATA

Supply voltage	$V_{11-13}$	typ.	12 V
Supply current	$I_{11}$	typ.	50 mA
I.F. input voltage at $f = 38,9$ MHz (r.m.s. value)	$V_{1-16(rms)}$	typ.	100 $\mu$ V
Video output voltage (white at 10% of top sync)	$V_{12(p-p)}$	typ.	2,7 V
I.F. voltage gain control range	$G_V$	typ.	64 dB
Signal-to-noise ratio at $V_i = 10$ mV	S/N	typ.	58 dB
A.F.C. output voltage swing for $\Delta f = 100$ kHz	$\Delta V_{5-13}$	typ.	10 V

### PACKAGE OUTLINES

TDA2541 : 16-lead DIL; plastic (SOT-38).

TDA2541Q: 16-lead QIL; plastic (SOT-58).

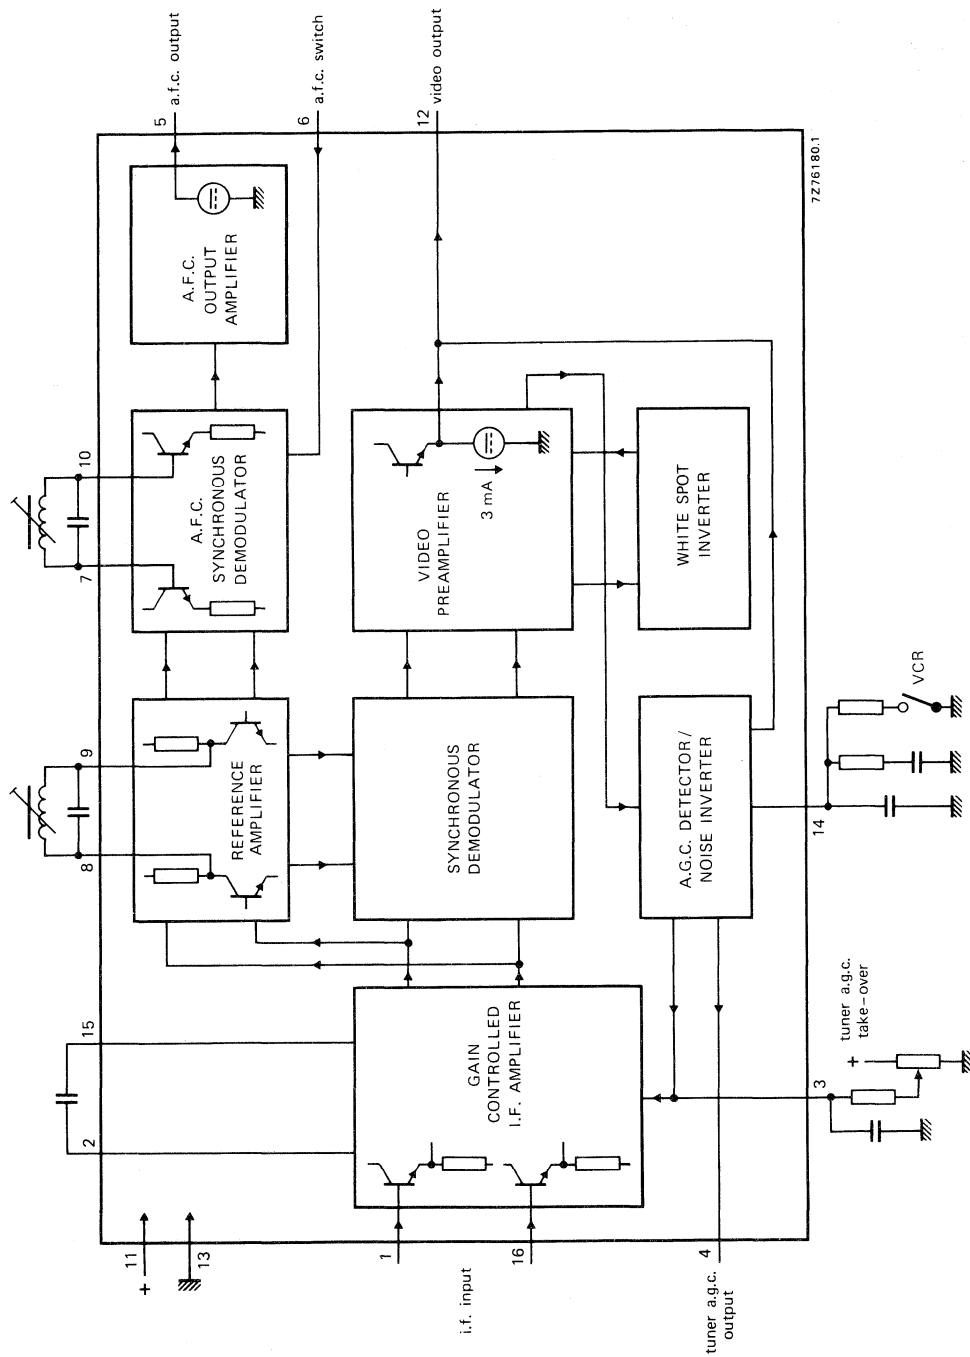

7276180.1

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_{11-13}$	max.	13,2 V
Tuner a.g.c. voltage	$V_{4-13}$	max.	12 V
Total power dissipation	$P_{tot}$	max.	900 mW
Storage temperature	$T_{stg}$		-55 to + 125 °C
Operating ambient temperature	$T_{amb}$		-25 to + 60 °C

**CHARACTERISTICS** (measured in Fig. 5)

Supply voltage range	$V_{11-13}$	typ.	12 V
			10,2 to 13,2 V
The following characteristics are measured at $T_{amb} = 25\text{ °C}$ ; $V_{11-13} = 12\text{ V}$ ; $f = 38,9\text{ MHz}$			
I.F. input voltage for onset of a.g.c. (r.m.s. value)	$V_{1-16(rms)}$	typ.	100 $\mu\text{V}$
		<	150 $\mu\text{V}$
Differential input impedance	$ Z_{1-16} $	typ.	2 k $\Omega$ in parallel with 2 pF
Zero-signal output level variation	$V_{12-13}$	typ.	5,95 V* $\pm 0,35\text{ V}$
Top sync output level	$V_{12-13}$	typ.	3,00 V 2,85 to 3,15 V
I.F. voltage gain control range	$G_V$	typ.	64 dB
Bandwidth of video amplifier (3 dB)	B	typ.	6 MHz
Signal-to-noise ratio at $V_i = 10\text{ mV}$	S/N	typ.	58 dB**
Differential gain	dG	typ.	4 %
		<	10 %
Differential phase	$d\phi$	typ.	2°
		<	10°

\* So-called 'projected zero point', e.g. with switched demodulator.

\*\* 
$$S/N = \frac{V_O \text{ black-to-white}}{V_{n(rms)} \text{ at } B = 5\text{ MHz}}$$

CHARACTERISTICS (continued)

Intermodulation at 1,1 MHz: blue\*


> 46 dB  
typ. 60 dB

yellow\*

> 46 dB  
typ. 50 dB

at 3,3 MHz\*\*

> 46 dB  
typ. 54 dB

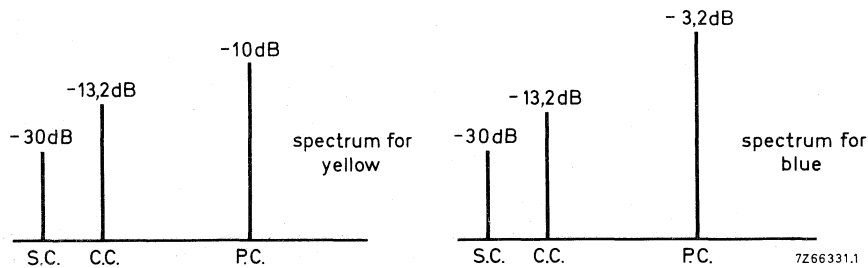

S.C. : sound carrier level  
C.C. : chrominance carrier level  
P.C. : picture carrier level

} with respect to top sync level

Fig. 2 Input conditions for intermodulation measurements; standard colour bar with 75% contrast.

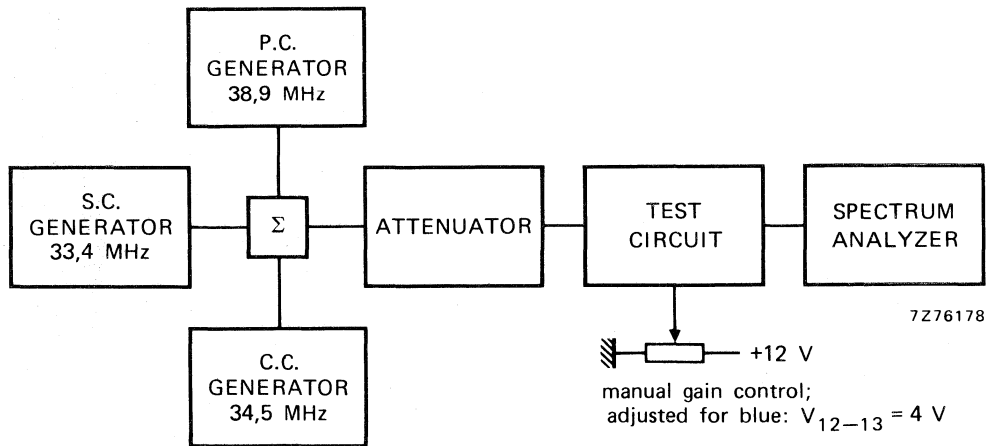


Fig. 3 Test set-up for intermodulation.

\*  $20 \log \frac{V_O \text{ at } 4,4 \text{ MHz}}{V_O \text{ at } 1,1 \text{ MHz}} + 3,6 \text{ dB.}$

\*\*  $20 \log \frac{V_O \text{ at } 4,4 \text{ MHz}}{V_O \text{ at } 3,3 \text{ MHz}}$

Carrier signal at video output	typ.	4 mV
	<	30 mV
2nd harmonic of carrier at video output	typ.	20 mV
	<	30 mV
White spot inverter threshold level (Fig. 4)	typ.	6,6 V
White spot insertion level (Fig. 4)	typ.	4,7 V
Noise inverter threshold level (Fig. 4)	typ.	1,8 V
Noise insertion level (Fig. 4)	typ.	3,8 V
External video switch (VCR) switches off the output at:	V14-13	< 1,1 V

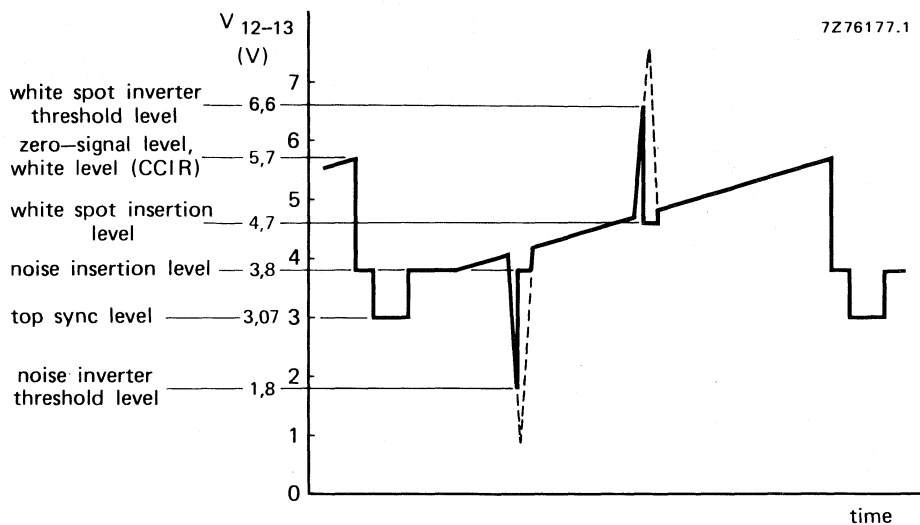


Fig. 4 Video output waveform showing white spot and noise inverter threshold levels.

Tuner a.g.c. output current range	$I_4$	0 to 10 mA
Tuner a.g.c. output voltage at $I_4 = 10$ mA	V4-13	< 0,3 V
Tuner a.g.c. output leakage current	$I_4$	< 15 $\mu$ A
V14-13 = 11 V; V4-13 = 12 V		> 10 V
Maximum a.f.c. output voltage swing	$\Delta V_{5-13}$	typ. 11 V
Detuning for a.f.c. output voltage swing of 10 V	$\Delta f$	typ. 100 kHz
		< 200 kHz
A.F.C. zero-signal output voltage (minimum gain)	V5-13	typ. 6 V
		4 to 8 V
A.F.C. switches on at:	V6-13	> 3,2 V
A.F.C. switches off at:	V6-13	< 1,5 V

APPLICATION INFORMATION

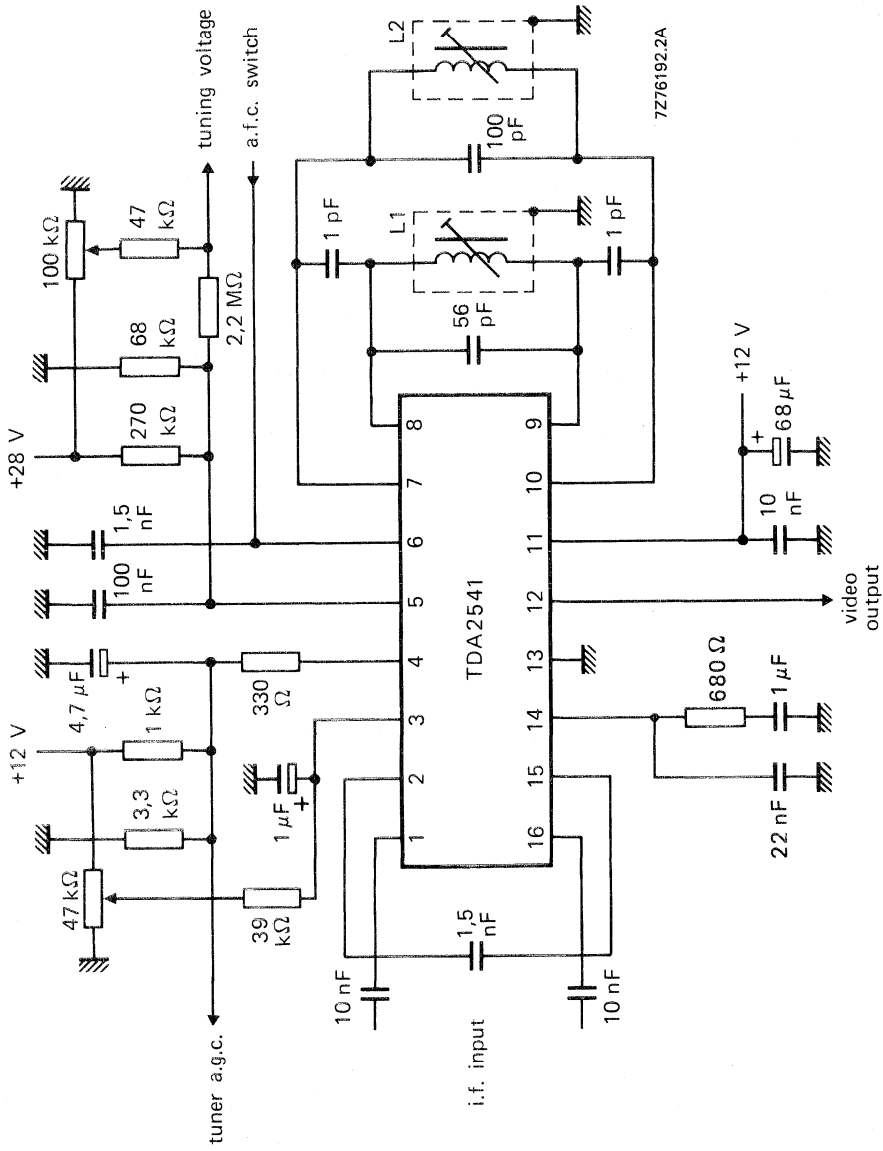


Fig. 5 Typical application circuit diagram; Q of L1 and L2  $\approx$  80;  $f_0 = 38,9$  MHz.

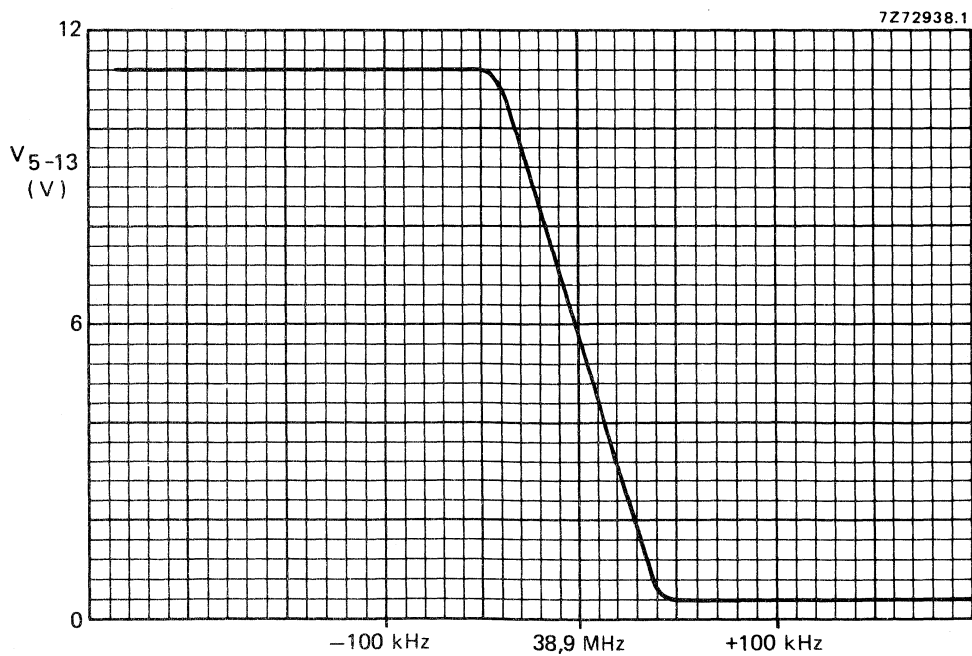
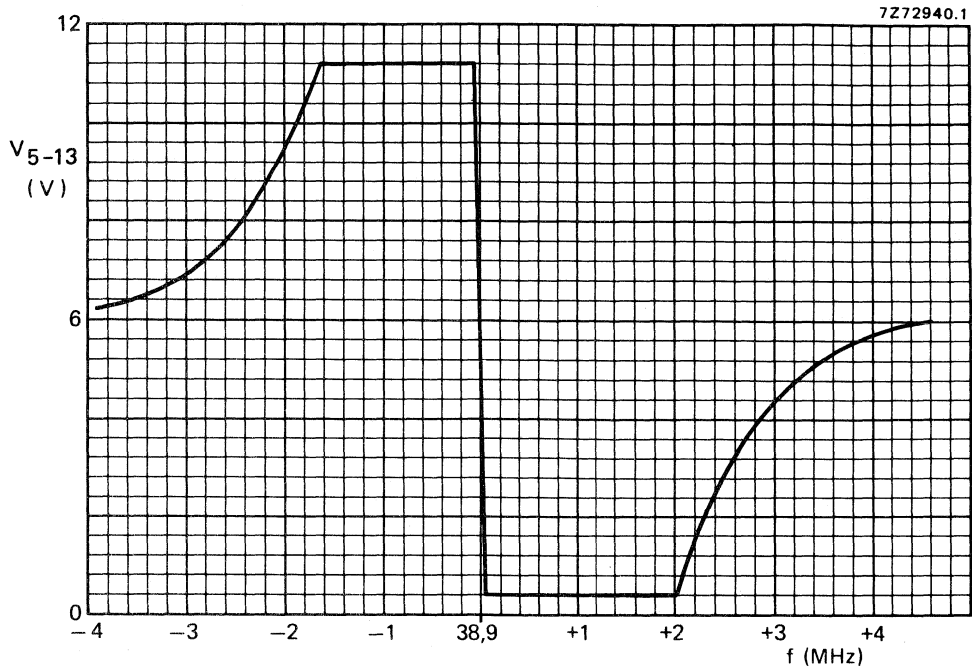


Fig. 6 A.F.C. output voltage ( $V_{5-13}$ ) as a function of the frequency.

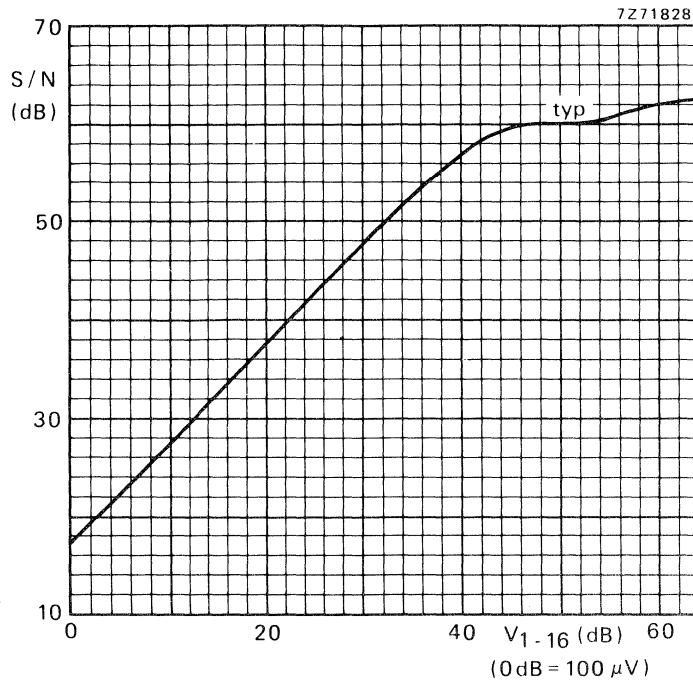


Fig. 7 Signal-to-noise ratio as a function of the input voltage ( $V_{1.16}$ ).



## TELEVISION I.F. AMPLIFIER AND DEMODULATOR

The TDA2542 is an i.f. amplifier and demodulator circuit for E and L standards in colour and black and white television receivers using p-n-p tuners.

It incorporates the following functions:

- gain-controlled wide-band amplifier, providing complete i.f. gain
- synchronous demodulator
- video preamplifier
- a.f.c. circuit which can be switched on/off by a d.c. level, e.g. during tuning
- a.g.c. circuit
- tuner a.g.c. output (p-n-p tuners)

### QUICK REFERENCE DATA

Supply voltage	V <sub>11-13</sub>	typ.	12 V
Supply current	I <sub>11</sub>	typ.	50 mA
I.F. input voltage at f = 32,7 MHz (r.m.s. value)	V <sub>1-16(rms)</sub>	typ.	100 $\mu$ V
Video output voltage (peak-to-peak value)	V <sub>12(p-p)</sub>	typ.	3 V
I.F. voltage gain control range	G <sub>v</sub>	typ.	64 dB
Signal-to-noise ratio at V <sub>i</sub> = 10 mV	S/N	typ.	58 dB
A.F.C. output voltage swing for $\Delta f = 100$ kHz	$\Delta V_{5-13}$	typ.	10 V

### PACKAGE OUTLINES

TDA2542 : 16-lead DIL; plastic (SOT-38).

TDA2542Q: 16-lead QIL; plastic (SOT-58).

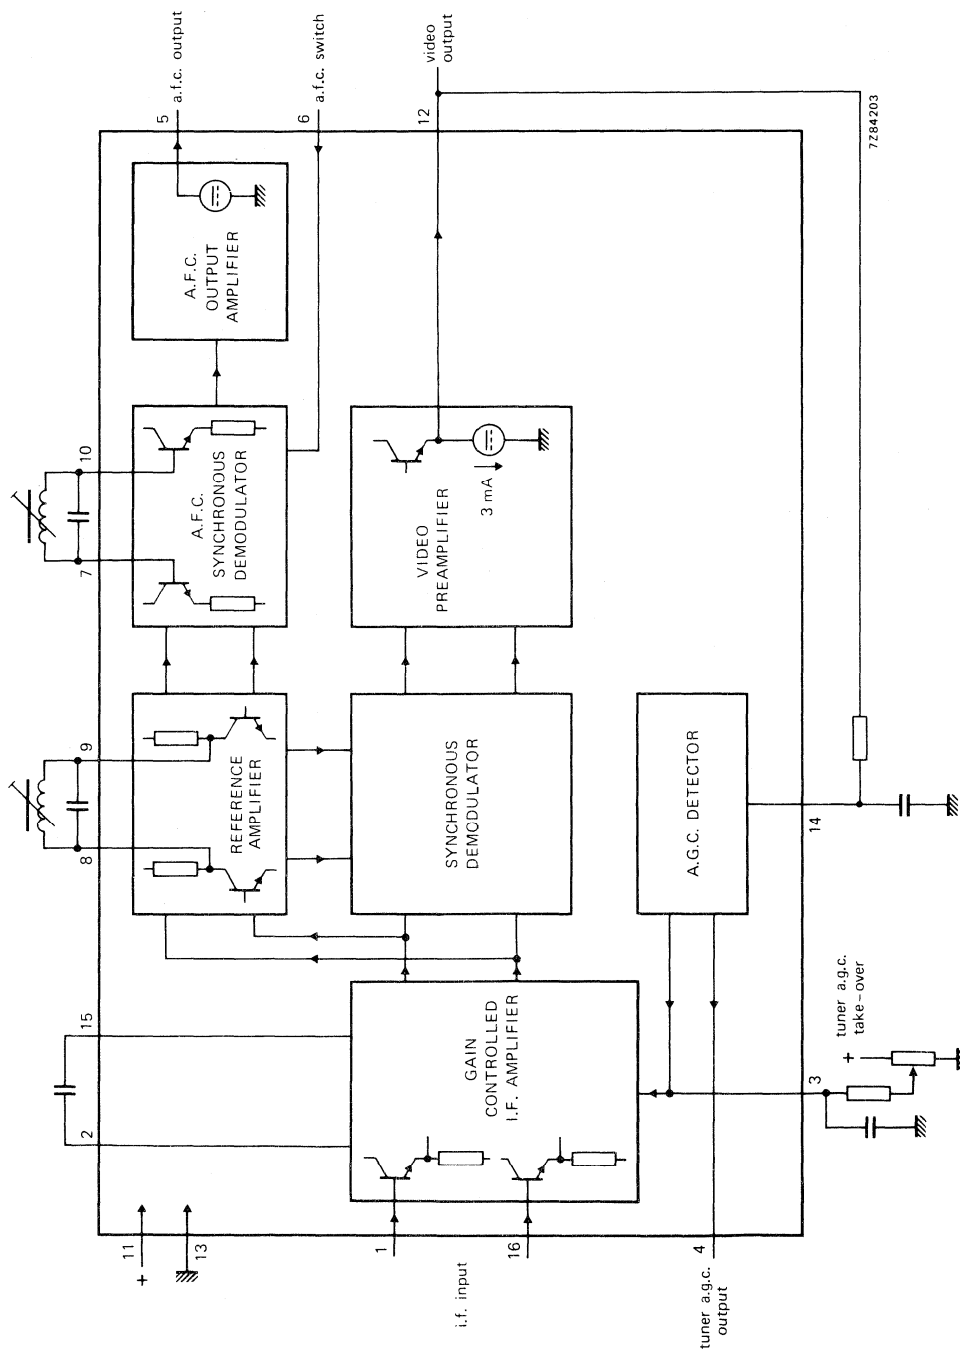


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_{11-13}$	max.	13,8 V
Tuner a.g.c. voltage	$V_{4-13}$	max.	12 V
Total power dissipation	$P_{tot}$	max.	900 mW
Storage temperature	$T_{stg}$		-55 to + 125 °C
Operating ambient temperature	$T_{amb}$		-25 to + 60 °C

**CHARACTERISTICS** (measured in Fig. 2)


Supply voltage range	$V_{11-13}$	typ.	12 V
			10,2 to 13,8 V
The following characteristics are measured at $T_{amb} = 25$ °C; $V_{11-13} = 12$ V; $f = 32,7$ MHz			
I.F. input voltage for onset of a.g.c. (r.m.s. value)	$V_{1-16(rms)}$	typ.	100 $\mu$ V
		<	150 $\mu$ V
Differential input impedance	$ Z_{1-16} $	typ.	2 k $\Omega$ in parallel with 2 pF
Zero-signal output level	$V_{12-13}$	typ.	2,9 V
Maximum video output voltage (peak-to-peak value)	$V_{12(p-p)}$	>	4 V
Video output voltage variation at 50 dB input voltage variation	$\Delta V_{12-13}$	<	0,5 dB
I.F. voltage gain control range	$G_v$	typ.	64 dB
Bandwidth of video amplifier (3 dB)	B	typ.	6 MHz
Signal-to-noise ratio at $V_i = 10$ mV	S/N	typ.	58 dB*
Differential gain	dG	typ.	4 %
		<	10 %
Differential phase	$d\varphi$	typ.	2°
		<	10°

$$* S/N = \frac{V_o \text{ black-to-white}}{V_n(rms) \text{ at } B = 5 \text{ MHz}}$$

CHARACTERISTICS (continued)

Carrier signal at video output		typ.	4 mV
		<	30 mV
2nd harmonic of carrier at video output		typ.	20 mV
		<	30 mV
Tuner a.g.c. output current range	$I_4$		0 to 10 mA
Tuner a.g.c. output voltage at $I_4 = 10$ mA	$V_{4-13}$	<	0,3 V
Tuner a.g.c. output leakage current $V_{14-13} = 3$ V; $V_{4-13} = 12$ V	$I_4$	<	15 $\mu$ A
		>	10 V
Maximum a.f.c. output voltage swing	$\Delta V_{5-13}$	typ.	11 V
Detuning for a.f.c. output voltage swing of 10 V	$\Delta f$	typ.	100 kHz
		<	200 kHz
A.F.C. switches on at:	$V_{6-13}$	>	3,2 V
A.F.C. switches off at:	$V_{6-13}$	<	1,5 V
A.G.C. detector reference voltage	$V_{14-13}$	typ.	3,9 V

APPLICATION INFORMATION

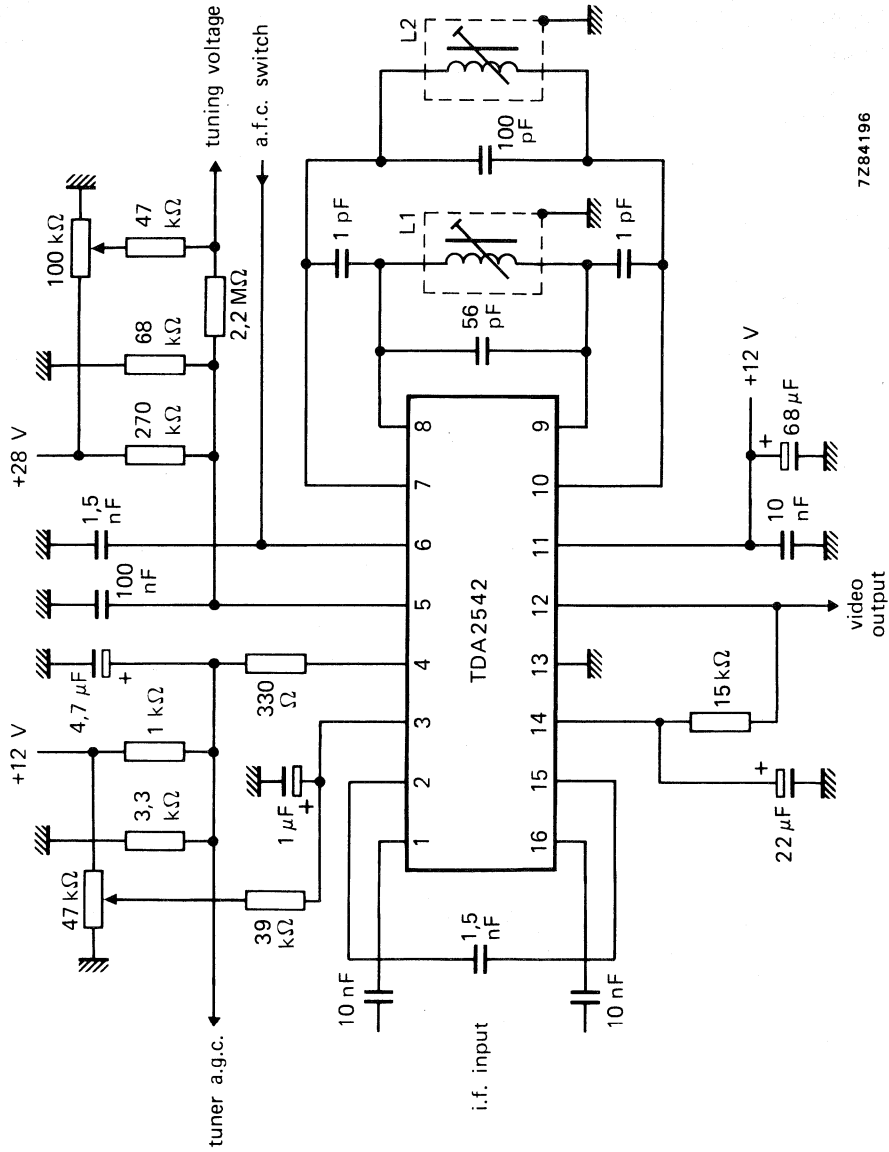

7Z84196

Fig. 2 Typical application circuit diagram; Q of L1 and L2 ≈ 80; f = 32,7 MHz.

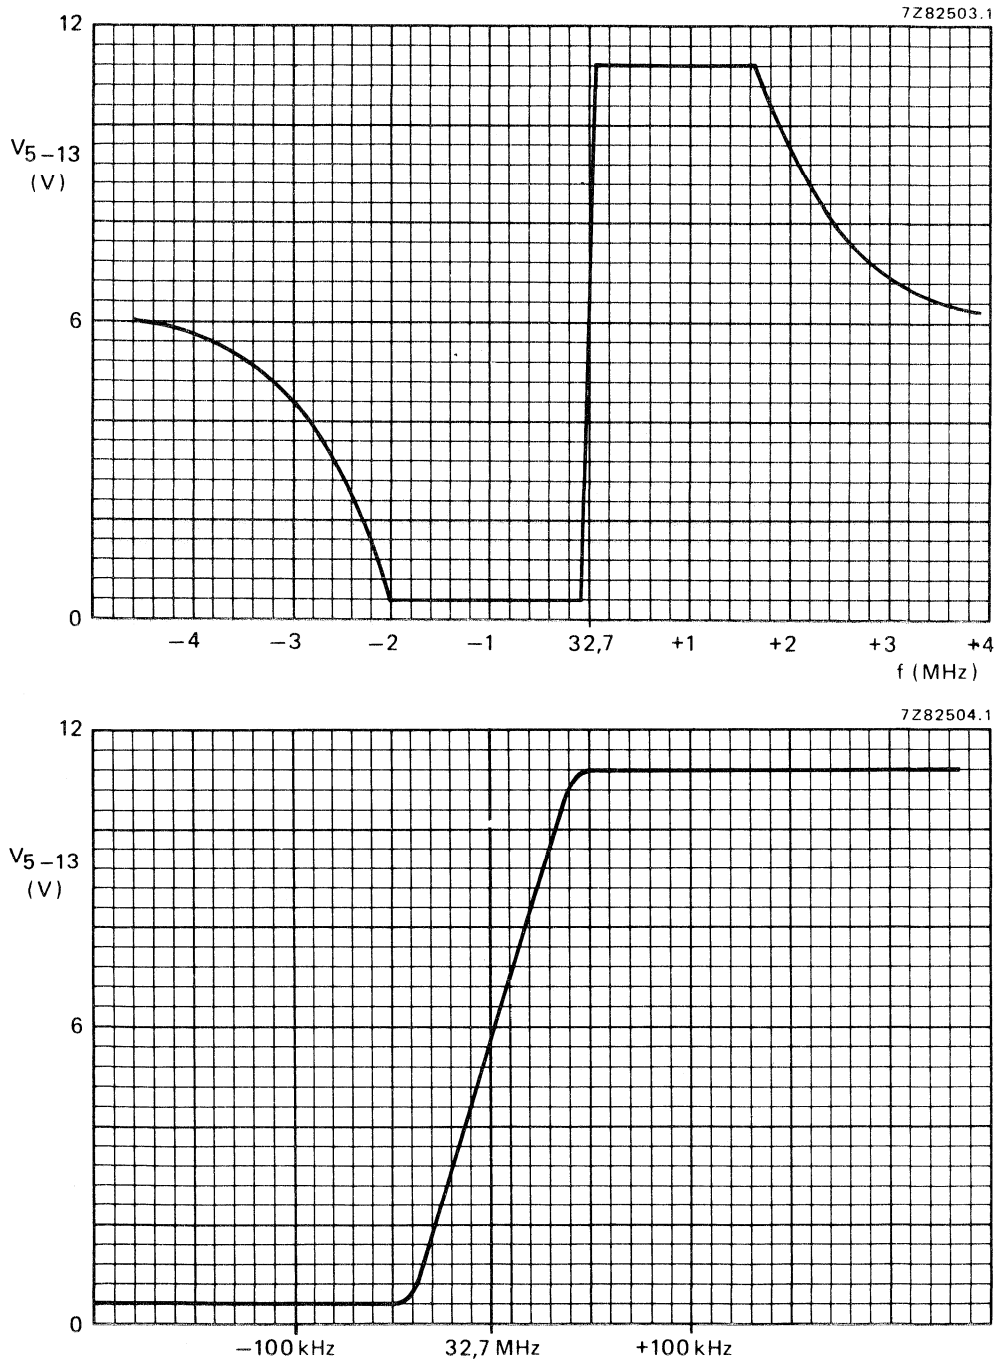


Fig. 3 A.F.C. output voltage ( $V_{5-13}$ ) as a function of the frequency.

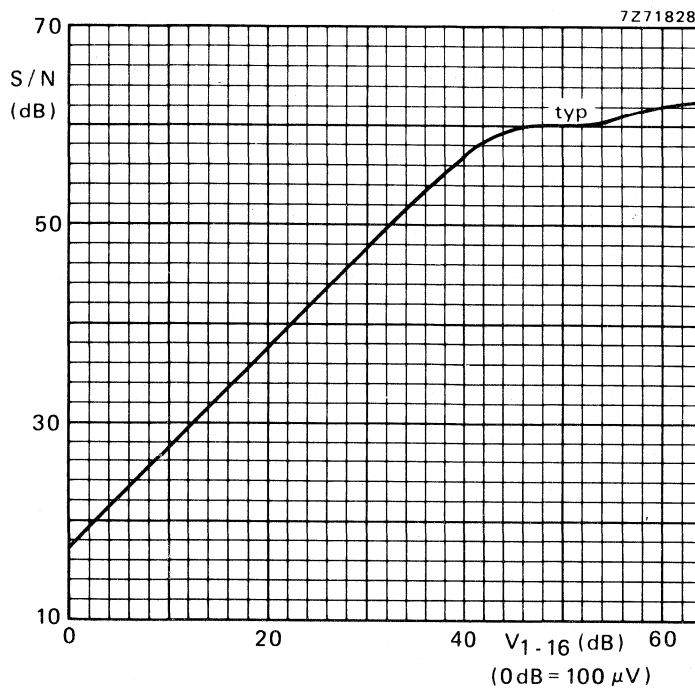


Fig. 4 Signal-to-noise ratio as a function of the input voltage ( $V_{1-16}$ ).





## AM SOUND I.F. CIRCUIT FOR FRENCH STANDARD

### GENERAL DESCRIPTION

The TDA2543 is a monolithic integrated AM sound i.f. circuit in television receivers for the French standards L and L'.

The circuit incorporates the following functions:


- 3-stage gain controlled i.f. amplifier, providing complete i.f. gain
- Synchronous AM demodulator
- A.G.C. circuit
- Audio input circuit with two external audio inputs and switching facilities to provide for either the demodulated i.f. or an external signal output
- Demodulated i.f. output is available from the input of the switching circuit

### QUICK REFERENCE DATA

Supply voltage (pin 12)	$V_{12-14} = V_p$	typ.	12 V
Minimum i.f. vision carrier input voltage (r.m.s. value) for an output signal $V_{13-14(rms)} = 480$ mV	$V_{VC1-18(rms)}$	max.	30 $\mu$ V
I.F. control range	$\Delta G_v$	min.	60 dB
A.F. output voltage (r.m.s. value)	$V_{13-14(rms)}$	typ.	680 mV
Distortion at $V_{VC1-18(rms)} = 5$ mV	$d_{tot}$	max.	1 %
Signal-to-weighted-noise ratio according to CCIR 468	S + N/N	min.	50 dB
Maximum signal amplitude for the a.f. switch (r.m.s. value)	$V_{8;11-14(rms)}$	min.	2 V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

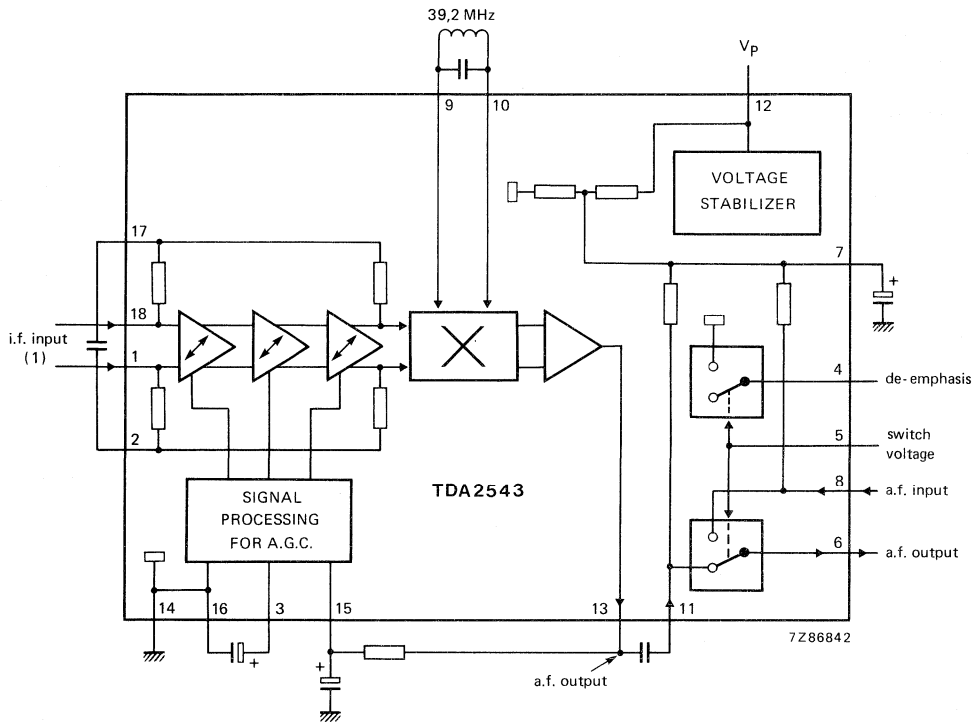

(1) I.F. signal: vision carrier (V.C.) and sound carrier (S.C.).

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range (pin 12)	$V_{12-14} = V_p$	max.	13,2 V
Switch voltage (pin 5)	$V_{5-14}$	max.	$V_p$ V
Current at pin 4	$I_4$	max.	5 mA
	$-I_4$		short-circuit proof
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

## CHARACTERISTICS

$V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; input signal (vision carrier V.C.) with  $f_{VC} = 39,2\text{ MHz}$ ; sound carrier (S.C.) modulated with  $f_m = 1\text{ kHz}$  and  $m = 0,8$ ; measured in Fig. 2; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage range (pin 12)	$V_P$	10,8	—	13,2	V
Supply current (pin 12)	$I_P$	—	50	—	mA
<b>I.F. input (pins 1 and 18)</b>					
Minimum i.f. vision carrier input voltage (r.m.s. value) for an output signal $V_{13-14(rms)} = 480\text{ mV}$	$V_{VC1-18(rms)}$	—	—	30	$\mu\text{V}$
Maximum i.f. vision carrier input voltage (r.m.s. value)	$V_{VC1-18(rms)}$	—	50	—	mV
Input resistance	$R_{1-18}$	—	2	—	$\text{k}\Omega$
Input capacitance	$C_{1-18}$	—	2	—	pF
I.F. control range ( $-3\text{ dB}$ )	$\Delta G_V$	60	—	—	dB
<b>A.F. output (pin 13)</b>					
A.F. output voltage (r.m.s. value) at $V_{VC1-18(rms)} = 5\text{ mV}$	$V_{13-14(rms)}$	—	680	—	mV
Output resistance	$R_{13-14}$	—	100	—	$\Omega$
Distortion at $V_{VC1-18(rms)} = 5\text{ mV}$	$d_{tot}$	—	—	1	%
Signal-to-weighted-noise ratio at a.f. output (pin 13) according to CCIR 468 at $V_{VC1-18(rms)} = 5\text{ mV}$	S + N/N	50	—	—	dB
<b>A.F. switch (pins 8, 11 and 6)</b>					
Maximum input voltage (r.m.s. value)	$V_{8-14(rms)}$	2	—	—	V
	$V_{11-14(rms)}$	2	—	—	V
Voltage gain	$G_V$	—	$0 \pm 1$	—	dB
Amplitude frequency response ( $-3\text{ dB}$ )	f	20	—	20 000	Hz
Crosstalk between the non-switched input and the output	$\alpha$	60	—	—	dB
Input resistance	$R_{8; 11-14}$	10	—	—	$\text{k}\Omega$
Output resistance	$R_{6-14}$	—	400	—	$\Omega$
<b>De-emphasis switch (pin 4)</b>					
Input resistance for: ON ( $V_{5-14} > 3\text{ V}$ )	$R_{4-14}$	—	—	200	$\Omega$
OFF ( $V_{5-14} < 1\text{ V}$ )	$R_{4-14}$	100	—	—	$\text{k}\Omega$
<b>Switch voltage (pin 5)</b>					
A.F. switch ON (pin 8 switched)	$V_{5-14}$	3	—	$V_P$	V
A.F. switch OFF (pin 11 switched)	$V_{5-14}$	0	—	1	V

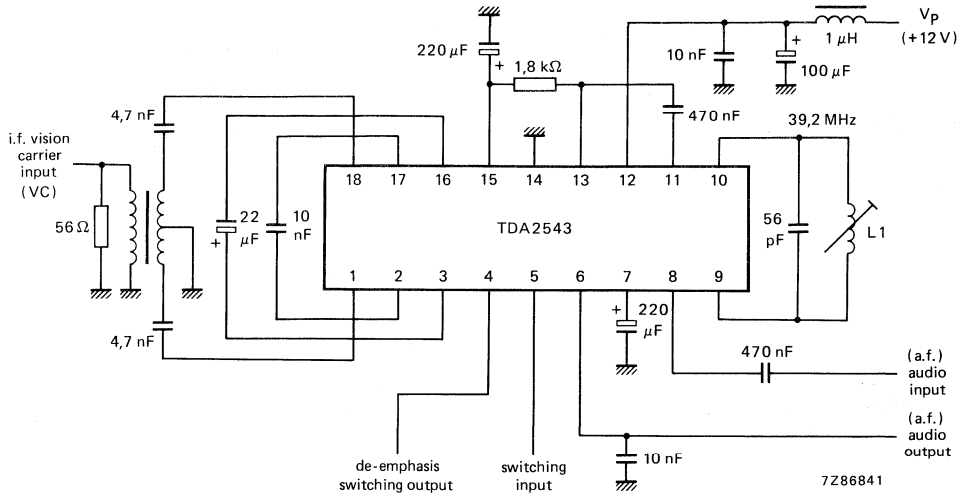


Fig. 2 Measuring circuit; L1 adjusted to minimum distortion at the a.f. output.

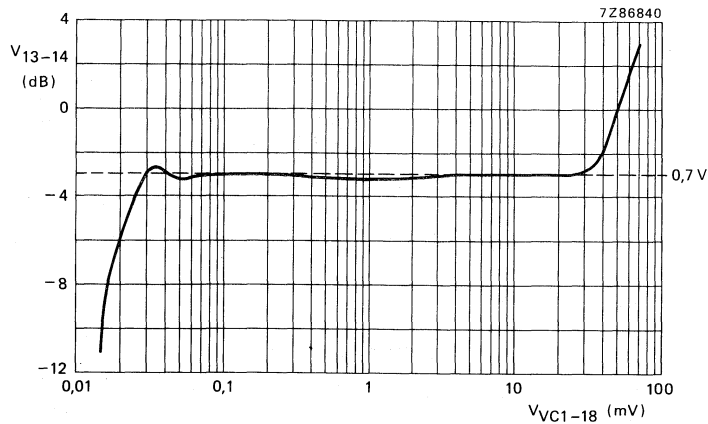


Fig. 3 Control curve of the i.f. amplifier; the r.m.s. a.f. output voltage at pin 13 ( $V_{13-14}(rms)$ ) as a function of the r.m.s. i.f. vision carrier input voltage ( $V_{VC1-18}(rms)$ ) at  $f_m = 1$  kHz and  $m = 0,8$ .

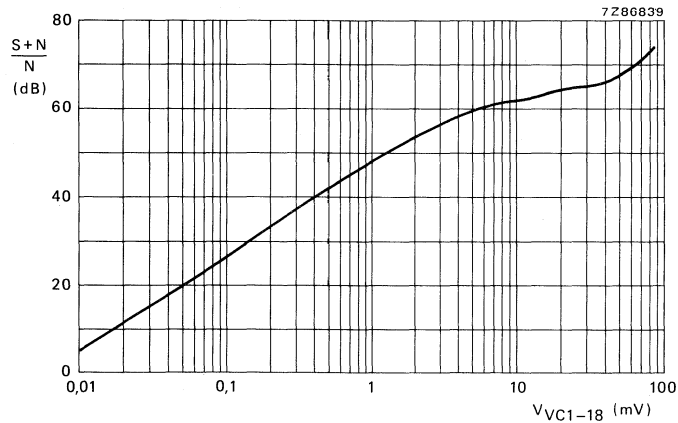


Fig. 4 Signal-to-weighted-noise ratio ( $S + N/N$ ) at the output (pin 13) as a function of the r.m.s. i.f. vision carrier input voltage ( $V_{VC1-18}(rms)$ ).

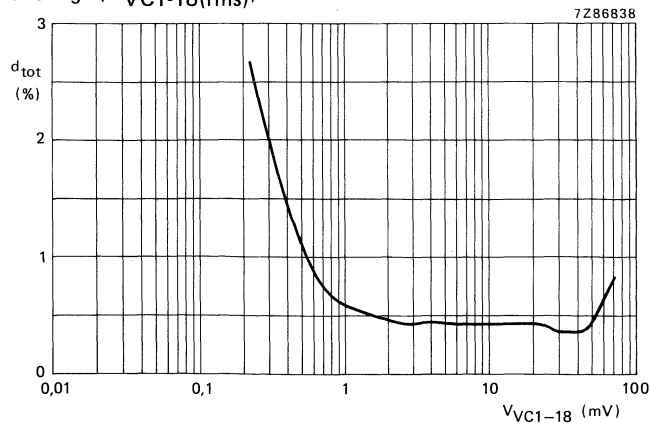


Fig. 5 Distortion ( $d_{tot}$ ) at the output (pin 13) as a function of the r.m.s. i.f. vision carrier input voltage ( $V_{VC1-18}(rms)$ ) at  $f_m = 1$  kHz and  $m = 0,8$ .



## TELEVISION I.F. AMPLIFIER AND DEMODULATOR

The TDA2544 is an i.f. amplifier and demodulator circuit for colour and black and white television receivers.

It incorporates the following functions:

- gain-controlled wide-band amplifier, providing complete i.f. gain
- low-level synchronous demodulator
- white spot inverter
- video preamplifier with noise protection
- a.f.c. circuit with balanced output
- a.g.c. circuit with noise gating
- tuner a.g.c. output for control of MOS tuners
- external video switch

### QUICK REFERENCE DATA

Supply voltage	V <sub>11-13</sub>	typ.	12 V
Supply current	I <sub>11</sub>	typ.	50 mA
I.F. input sensitivity at f = 45,75 MHz (r.m.s. value)	V <sub>1-16(rms)</sub>	typ.	150 $\mu$ V
Video output voltage (white at 12,5% of top sync)	V <sub>12(p-p)</sub>	typ.	2,6 V
I.F. voltage gain control range	G <sub>v</sub>	typ.	63 dB
Signal-to-noise ratio V <sub>i</sub> = 10 mV	S/N	typ.	58 dB
A.F.C. sensitivity		typ.	80 mV/kHz

### PACKAGE OUTLINES

TDA2544 16-lead DIL; plastic (SOT-38).

TDA2544Q: 16-lead QIL; plastic (SOT-58).

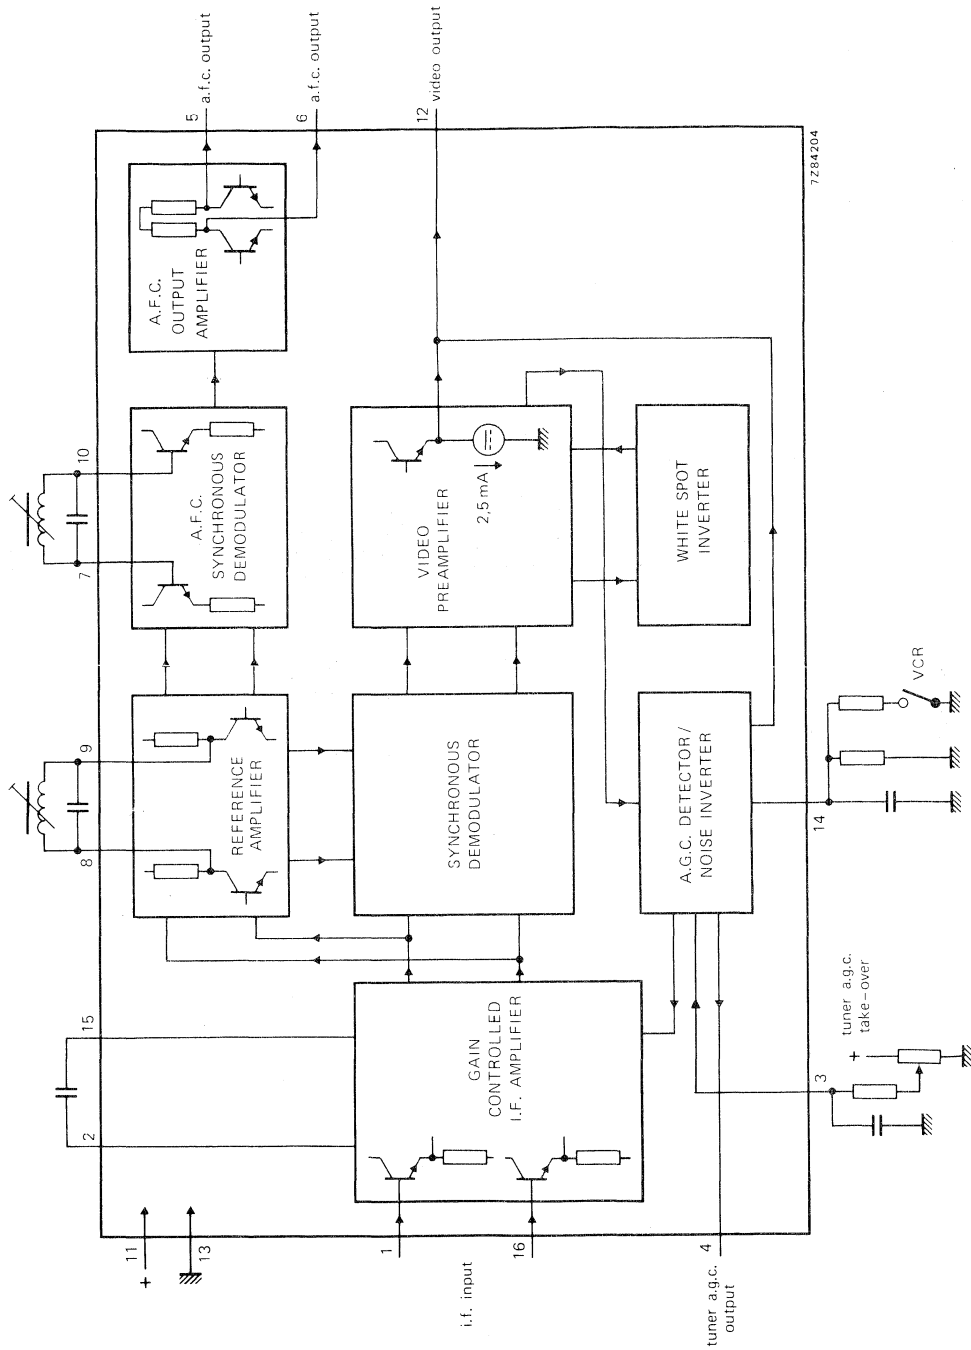


Fig. 1 Block diagram.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_{11-13}$	max.	13,8 V
Tuner a.g.c. voltage	$V_{4-13}$	max.	12 V
Total power dissipation	$P_{tot}$	max.	1,2 W
Storage temperature	$T_{stg}$		-55 to + 125 °C
Operating ambient temperature	$T_{amb}$		-25 to + 65 °C

**CHARACTERISTICS** (measured in Fig. 5)

Supply voltage range	$V_{11-13}$	typ.	12 V
			10,2 to 13,8 V

The following characteristics are measured at  $T_{amb} = 25$  °C;  $V_{11-13} = 12$  V


I.F. input voltage for onset of a.g.c. (r.m.s. value) at $f = 45,75$ MHz	$V_{1-16(rms)}$	typ.	150 $\mu$ V
Differential input impedance	$ Z_{1-16} $	typ.	$3 \text{ k}\Omega$ in parallel with 2 pF
Zero-signal output level	$V_{12-13}$	typ.	5,5 V*
Top sync output level	$V_{12-13}$	typ.	2,5 V
I.F. voltage gain control range	$G_v$	typ.	63 dB
Bandwidth of video amplifier (3 dB)	B	typ.	6 MHz
Signal-to-noise ratio at $V_i = 10$ mV	S/N	typ.	58 dB**
Differential gain	dG	typ.	4 %
		<	10 %
Differential phase	d $\varphi$	typ.	2°
		<	10°

\* So-called 'projected zero point', e.g. with switched demodulator.

\*\*  $S/N = \frac{V_O \text{ black-to-white}}{V_n(rms) \text{ at } B = 5 \text{ MHz}}$

**CHARACTERISTICS (continued)**

Intermodulation at 0,9 MHz: blue*	typ. 50 dB
yellow*	typ. 46 dB
at 2,6 MHz**	typ. 49 dB

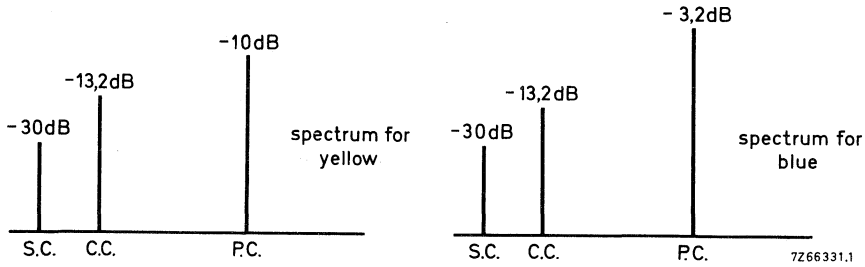

S.C. : sound carrier level  
C.C. : chrominance carrier level  
P.C. : picture carrier level

} with respect to top sync level

Fig. 2 Input conditions for intermodulation measurements; standard colour bar with 75% contrast.

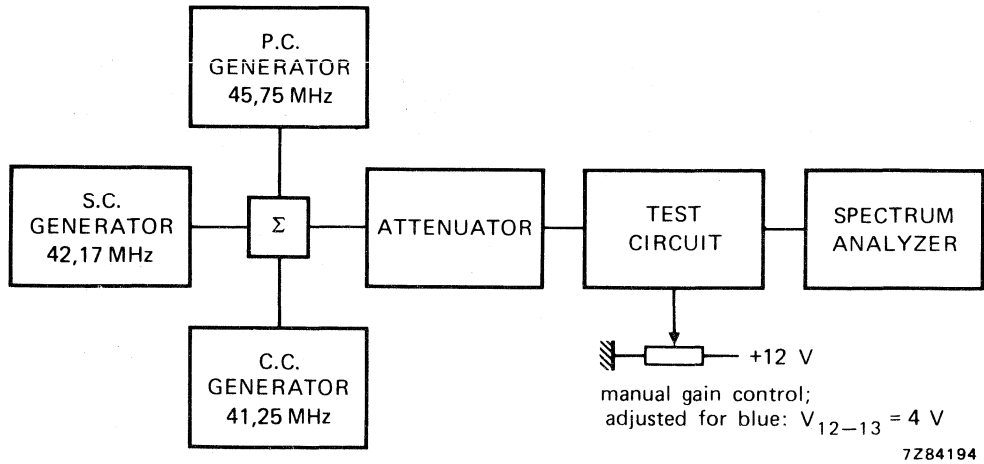


Fig. 3 Test set-up for intermodulation.

\*  $20 \log \frac{V_o \text{ at } 3,6 \text{ MHz}}{V_o \text{ at } 0,9 \text{ MHz}} + 3,6 \text{ dB.}$

\*\*  $20 \log \frac{V_o \text{ at } 3,6 \text{ MHz}}{V_o \text{ at } 2,6 \text{ MHz}}.$

Carrier signal at video output	<	30 mV
2nd harmonic of carrier at video output	<	30 mV
White spot inverter threshold level (Fig. 4)	typ.	6,4 V
White spot insertion level (Fig. 4)	typ.	4,1 V
Noise inverter threshold level (Fig. 4)	typ.	1,6 V
Noise insertion level (Fig. 4)	typ.	3,3 V
External video switch (VCR) switches off the output at	V <sub>14-13</sub>	< 1,0 V


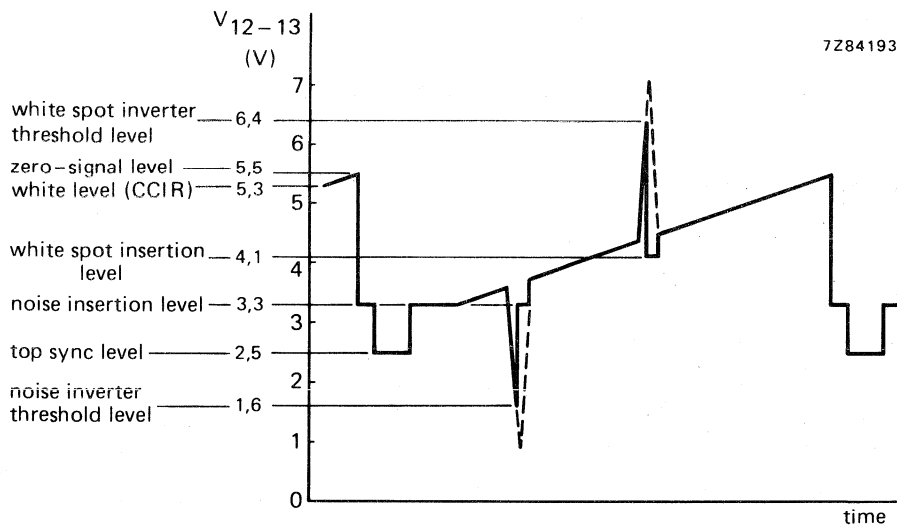


Fig. 4 Video output waveform showing white spot and noise inverter threshold levels.

Tuner a.g.c. output current range	$I_4$	0 to 0,3 mA
Tuner a.g.c. output voltage at $I_4 = 0,3$ mA	V <sub>4-13</sub>	< 0,3 V
Tuner a.g.c. output leakage current	$I_4$	< 10 $\mu$ A
V <sub>14-13</sub> = 3 V; V <sub>4-13</sub> = 12 V		
A.F.C. output voltage (d.c. value)	V <sub>5;6-13</sub>	typ. 6,8 V
A.F.C. output offset voltage	V <sub>5-6</sub>	< 1,5 V
Maximum a.f.c. output voltage	V <sub>5;6-13</sub>	> 11,6 V
Minimum a.f.c. output voltage	V <sub>5;6-13</sub>	< 2,8 V
A.F.C. sensitivity		typ. 80 mV/kHz

APPLICATION INFORMATION

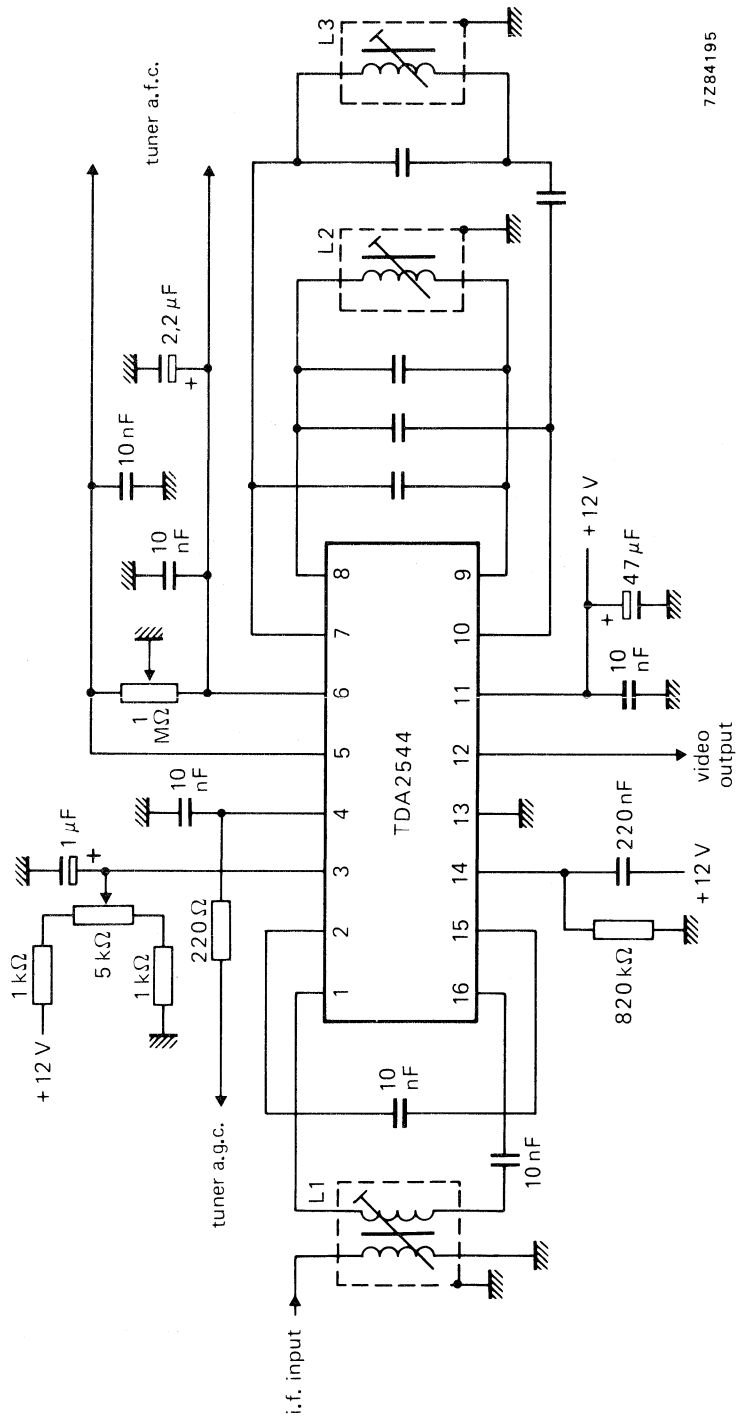

7Z84195

Fig. 5 Typical application diagram.

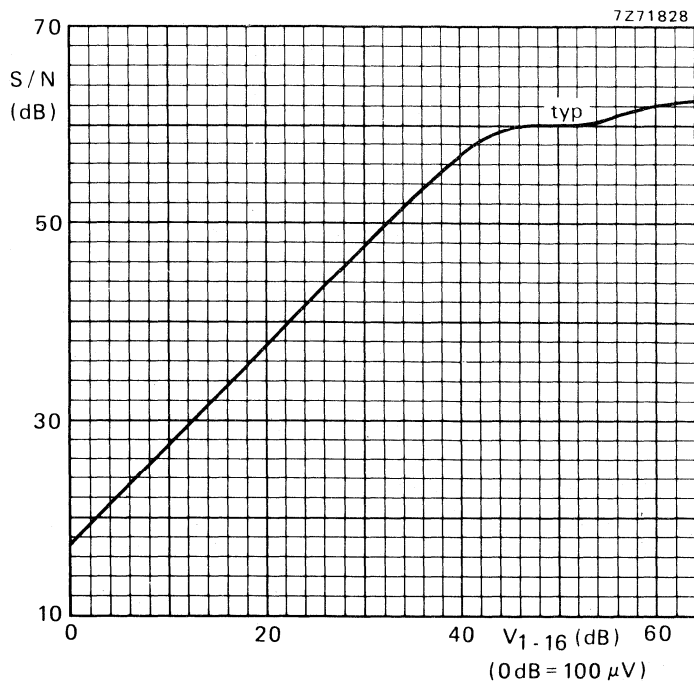


Fig. 6 Signal-to-noise ratio as a function of the input voltage (V<sub>1-16</sub>).



## QUASI-SPLIT-SOUND CIRCUIT

### GENERAL DESCRIPTION

The TDA2545A is a monolithic integrated circuit for quasi-split-sound processing in television receivers.

### Features


- 3-stage gain controlled i.f. amplifier
- A.G.C. circuit
- Reference amplifier and limiter amplifier for vision carrier (V.C.) processing
- Linear multiplier for quadrature demodulation

### QUICK REFERENCE DATA

Supply voltage (pin 11)	$V_P = V_{11-13}$	typ.	12 V
Supply current (pin 11)	$I_P = I_{11}$	typ.	45 mA
Minimum i.f. vision carrier input voltage (r.m.s. value)	$V_{VC1-16(rms)}$	typ.	150 $\mu$ V
Output voltage; 5,5 MHz (r.m.s. value)	$V_{12-13(rms)}$	typ.	100 mV
Output voltage; 5,742 MHz (r.m.s. value)	$V_{12-13(rms)}$	typ.	45 mV
I.F. control range	$\Delta G_V$	typ.	64 dB
Signal-to-weighted-noise ratio (rel. to 1 kHz; 30 kHz deviation)			
at 5,5 MHz	} for 2T/20T pulses with white bars	S + W/W	typ. 58 dB
at 5,742 MHz		S + W/W	typ. 56 dB

### PACKAGE OUTLINES

16-lead DIL; plastic (SOT-38).

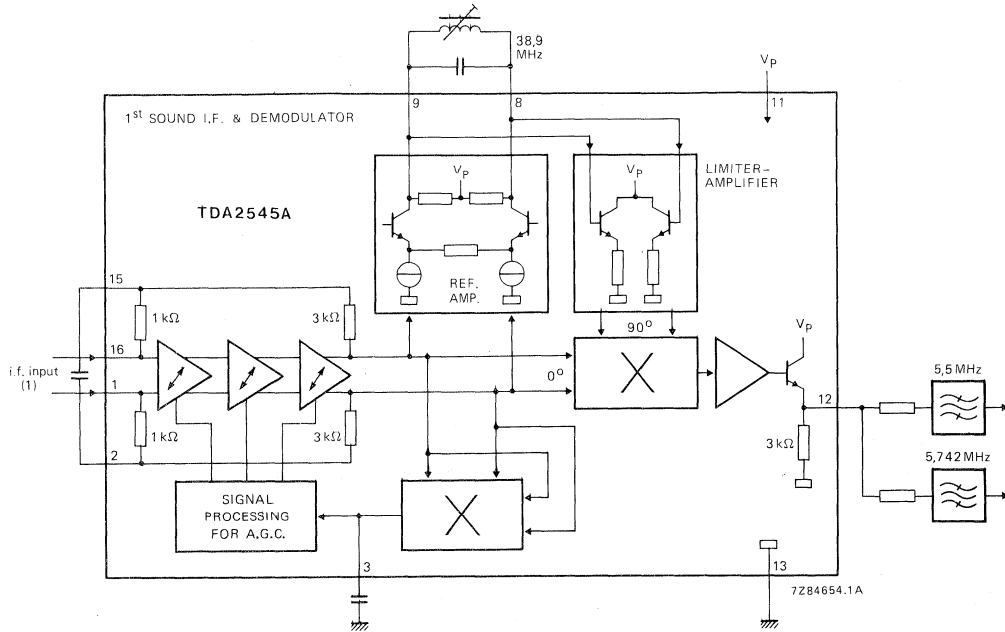

(1) I.F. signal: vision carrier (V.C.) and sound carrier (S.C.).

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 11)	$V_p = V_{11-13}$ max.	13,2 V
Storage temperature range	$T_{stg}$	-25 to +150 °C
Operating ambient temperature range	$T_{amb}$	0 to +70 °C



**CHARACTERISTICS**

$V_P = V_{11-13} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured at  $f_{\text{VC}} = 38,9 \text{ MHz}$ ,  $f_{\text{SC1}} = 33,4 \text{ MHz}$ ,  $f_{\text{SC2}} = 33,158 \text{ MHz}$ :

Vision carrier (V.C.) modulated with different video signals (see below); modulation depth 100% (proportional to 10% residual carrier).

Vision carrier amplitude (r.m.s. value) is  $V_{\text{VC}} = 10 \text{ mV}$ .

Vision-to-sound carrier ratios are  $\text{VC/SC1} = 13 \text{ dB}$  and  $\text{VC/SC2} = 20 \text{ dB}$ .

Sound carriers (SC1, SC2) modulated with  $f = 1 \text{ kHz}$  and deviation  $\Delta f = \pm 30 \text{ kHz}$ .

For measuring circuit see Fig. 2; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 11)</b>					
Supply voltage	$V_P = V_{11-13}$	10,8	12	13,2	V
Supply current	$I_P = I_{11}$	33	45	55	mA
<b>I.F. amplifier</b>					
Input voltage for start of gain control (intercarrier signals $-3 \text{ dB}$ )	$V_{\text{VC1-16(rms)}}$	—	150	200	$\mu\text{V}$
Input voltage for end of gain control (intercarrier signals $+1 \text{ dB}$ )	$V_{\text{VC1-16(rms)}}$	100	250	—	mV
I.F. gain control range	$\Delta G_V$	60	64	—	dB
Control voltage range (see Fig. 3)	$V_{3-13}$	4	—	$V_P$	V
Input resistance	$R_{1-16}$	—	2,5	—	$\text{k}\Omega$
Input capacitance	$C_{1-16}$	—	1,5	—	pF
<b>Intercarrier generation</b>					
Output voltage; 5,5 MHz (r.m.s. value)	$V_{12-13(\text{rms})}$	60	100	140	mV
Output voltage; 5,742 MHz (r.m.s. value)	$V_{12-13(\text{rms})}$	27	45	63	mV
D.C. output voltage	$V_{12-13}$	—	5,9	—	V
Allowable d.c. load resistance at the output	$R_{12-13}$	7	—	—	$\text{k}\Omega$
Allowable output current	$-I_{12}$	—	—	1	mA
<b>Intercarrier signal-to-noise (see note 1)</b> (measured behind the FM demodulators) weighted according to CCIR 468-2, quasi-peak					
a. 2T/20T pulses with white bars (see also Fig. 4)					
at 5,5 MHz	S+W/W	53	58	—	dB
at 5,742 MHz	S+W/W	51	56	—	dB
b. 6 kHz sinewave					
at 5,5 MHz	S+W/W	50	53	—	dB
at 5,742 MHz	S+W/W	50	53	—	dB
c. black level (sync pulses only)					
at 5,5 MHz	S+W/W	60	65	—	dB
at 5,742 MHz	S+W/W	58	63	—	dB

Note 1.

Incidental phase on the vision carrier, caused by TV transmitter, has to be less than 0,5 degrees for black to white transient (equivalent to S+W/W = 56 dB for 6 kHz sinewave).

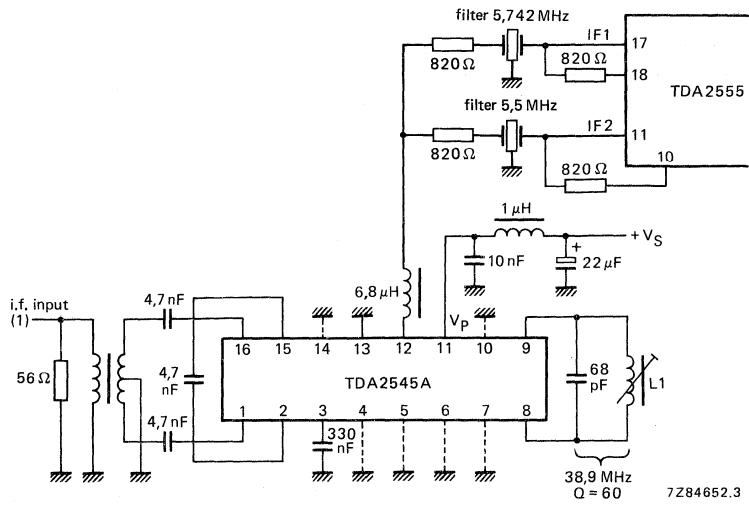


Fig. 2 Measuring circuit for TDA2545A.

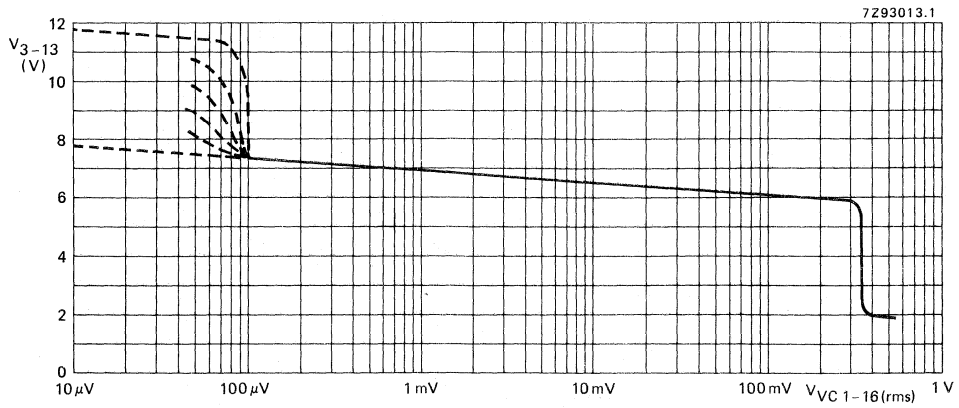


Fig. 3 Control voltage at pin 3 as a function of the input voltage  $V_{VC1-16}(rms)$ .

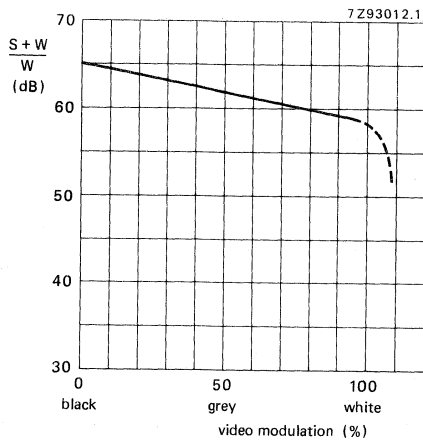


Fig. 4 Signal-to-weighted-noise ratio depending on video modulation.



## QUASI-SPLIT-SOUND CIRCUIT WITH 5,5 MHz DEMODULATION

### GENERAL DESCRIPTION

The TDA2546A is a monolithic integrated circuit for quasi-split-sound processing, including 5,5 MHz demodulation, in television receivers.

#### Features

1st i.f. (V.C.: vision carrier plus S.C.: sound carrier)

- 3-stage gain controlled i.f. amplifier
- A.G.C. circuit
- Reference amplifier and limiter amplifier for vision carrier (V.C.) processing
- Linear multiplier for quadrature demodulation

2nd i.f. (5,5 MHz signal)


- 8-stage limiter amplifier
- Quadrature demodulator
- A.F. amplifier with de-emphasis
- AV switch

### QUICK REFERENCE DATA

Supply voltage (pin 15)	$V_p = V_{15-16}$	typ.	12 V
Supply current (pin 15)	$I_p = I_{15}$	typ.	57 mA
Minimum i.f. vision carrier input voltage (r.m.s. value)	$V_{VC1-18(rms)}$	typ.	150 $\mu$ V
Output voltage; 5,5 MHz (r.m.s. value)	$V_{14-16(rms)}$	typ.	100 mV
Output voltage; 5,742 MHz (r.m.s. value)	$V_{14-16(rms)}$	typ.	45 mV
I.F. control range	$\Delta G_v$	typ.	64 dB
Signal-to-weighted-noise ratio (rel. to 1 kHz; 30 kHz deviation)			
at 5,5 MHz	S + W/W	typ.	58 dB
at 5,742 MHz	S + W/W	typ.	56 dB
A.F. output voltage (r.m.s. value)	$V_{o6-16(rms)}$	typ.	0,6 V

### PACKAGE OUTLINES

18-lead DIL; plastic (SOT-102H).

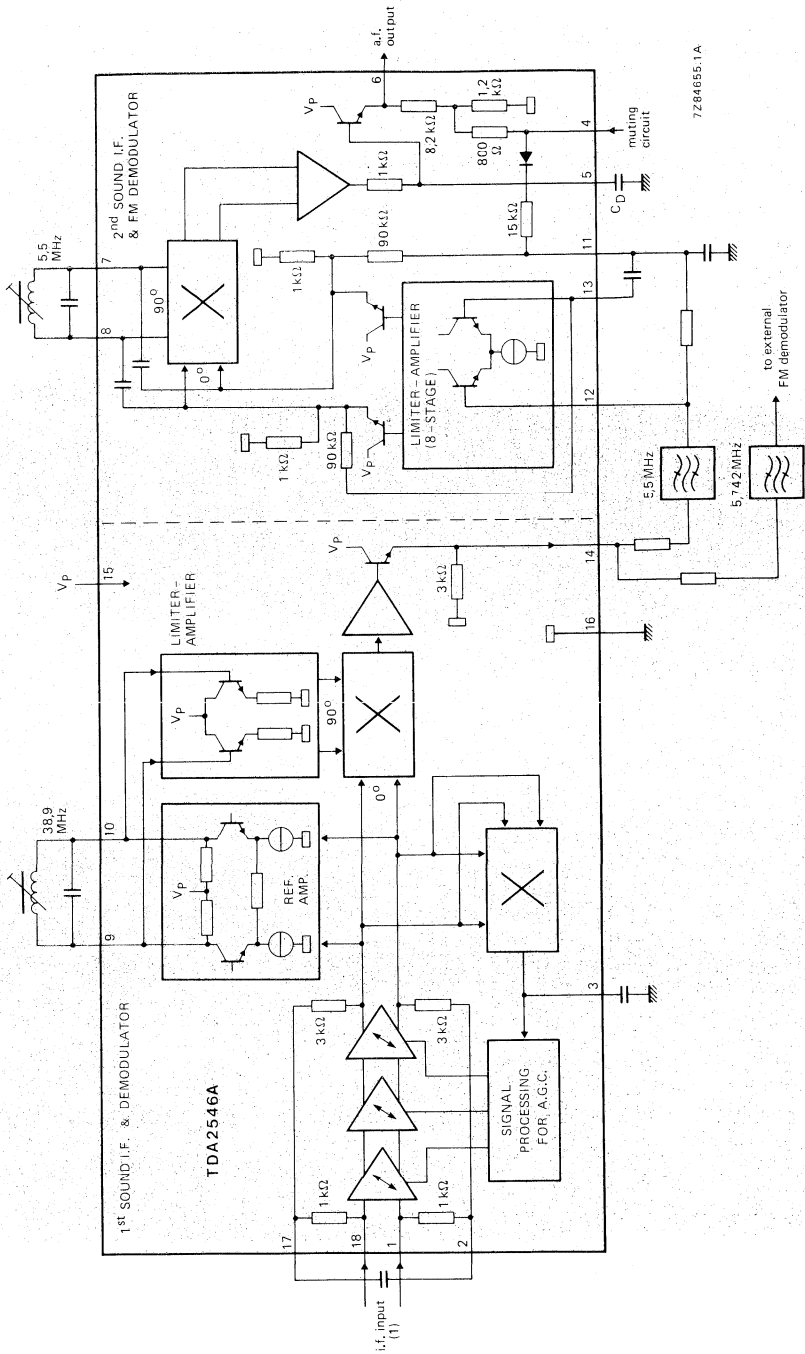

(1) I.F. signal: vision carrier (V.C.) and sound carrier (S.C.)

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 15)	$V_P = V_{15-16}$	max.	13,2 V
Input current (pin 4)	$I_4$	max.	7 mA
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

**CHARACTERISTICS**

$V_p = V_{15-16} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured at  $f_{\text{VC}} = 38,9 \text{ MHz}$ ,  $f_{\text{SC1}} = 33,4 \text{ MHz}$ ,  
 $f_{\text{SC2}} = 33,158 \text{ MHz}$ :

Vision carrier (V.C.) modulated with different video signals (see below); modulation depth 100%  
 (proportional to 10% residual carrier).

Vision carrier amplitude (r.m.s. value) is  $V_{\text{VC}} = 10 \text{ mV}$ .

Vision-to-sound carrier ratios are  $\text{VC/SC1} = 13 \text{ dB}$  and  $\text{VC/SC2} = 20 \text{ dB}$ .

Sound carriers (SC1, SC2) modulated with  $f = 1 \text{ kHz}$  and deviation  $\Delta f = \pm 30 \text{ kHz}$ .

For measuring circuit see Fig. 2; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b> (pin 15)					
Supply voltage	$V_p = V_{15-16}$	10,8	12	13,2	V
Supply current	$I_p = I_{15}$	40	57	75	mA
<b>I.F. amplifier</b>					
Input voltage for start of gain control (intercarrier signals $-3 \text{ dB}$ )	$V_{\text{VC1-18}}(\text{rms})$	—	150	200	$\mu\text{V}$
Input voltage for end of gain control (intercarrier signals $+1 \text{ dB}$ )	$V_{\text{VC1-18}}(\text{rms})$	100	250	—	mV
I.F. gain control range	$\Delta G_v$	60	64	—	dB
Control voltage range (see Fig. 3)	$V_{3-16}$	4	—	$V_p$	V
Input resistance	$R_{1-18}$	—	2,5	—	$\text{k}\Omega$
Input capacitance	$C_{1-18}$	—	1,5	—	pF
<b>Intercarrier generation</b>					
Output voltage; 5,5 MHz (r.m.s. value)	$V_{14-16}(\text{rms})$	60	100	140	mV
Output voltage; 5,742 MHz (r.m.s. value)	$V_{14-16}(\text{rms})$	27	45	63	mV
D.C. output voltage	$V_{14-16}$	—	5,9	—	V
Allowable d.c. load resistance at the output	$R_{14-16}$	7	—	—	V
Allowable output current	$-I_{14}$	—	—	1	mA
<b>Frequency demodulator</b> (measured at $f = 5,5 \text{ MHz}$ )					
Input voltage vor start of limiting (r.m.s. value)	$V_{12-16}(\text{rms})$	—	—	100	$\mu\text{V}$
Maximum input voltage (r.m.s. value)	$V_{12-16}(\text{rms})$	—	200	—	mV
D.C. output voltage	$V_{11,12,13-16}$	—	2,2	—	V



parameter	symbol	min.	typ.	max.	unit
A.F. output voltage (r.m.s. value)	$V_{6-16(rms)}$	450	600	810	mV
D.C. output voltage	$V_{6-16}$	—	4	—	V
Allowable d.c. load resistance at the output	$R_{6-16}$	27	—	—	k $\Omega$
Allowable a.c. load impedance at the output	$Z_{6-16}$	10	—	—	k $\Omega$
Total harmonic distortion	THD	—	—	1	%
Internal de-emphasis resistance	$R_{i5-16}$	—	1	—	k $\Omega$
Switching voltage (pin 4) for mute	$V_{4-16}$	9	—	—	V
for a.f. on	$V_{4-16}$	—	—	2,5	V
<b>Intercarrier signal-to-noise</b> (measured behind the FM demodulators)					
Signal-to-weighted-noise ratio according to CCIR 468-2, quasi-peak 2T/20T pulses with white bars (see also Fig. 4)					
at 5,5 MHz	S+W/W	53	58	—	dB
at 5,742 MHz	S+W/W	51	56	—	dB
6 kHz sine wave					
at 5,5 MHz	S+W/W	50	53	—	dB
at 5,742 MHz	S+W/W	50	53	—	dB
with black level (vision carrier modulated with sync pulses only)					
at 5,5 MHz	S+W/W	60	65	—	dB
at 5,742 MHz	S+W/W	58	63	—	dB

**NOTES TO THE CHARACTERISTICS**

- Incidental phase on the vision carrier, caused by TV-transmitter, has to be less than 0,5 degrees for black to white transient.  
(Equivalent to S+W/W = 56 dB for 6 kHz sine wave).

(1) I.F. signal: vision carrier (V.C.)  
and sound carrier (S.C.)

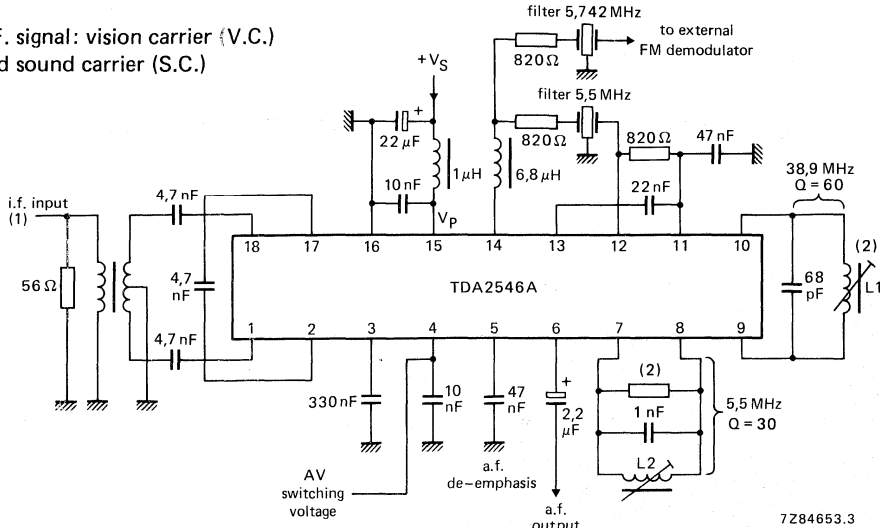


Fig. 2 Measuring circuit for TDA2546A.

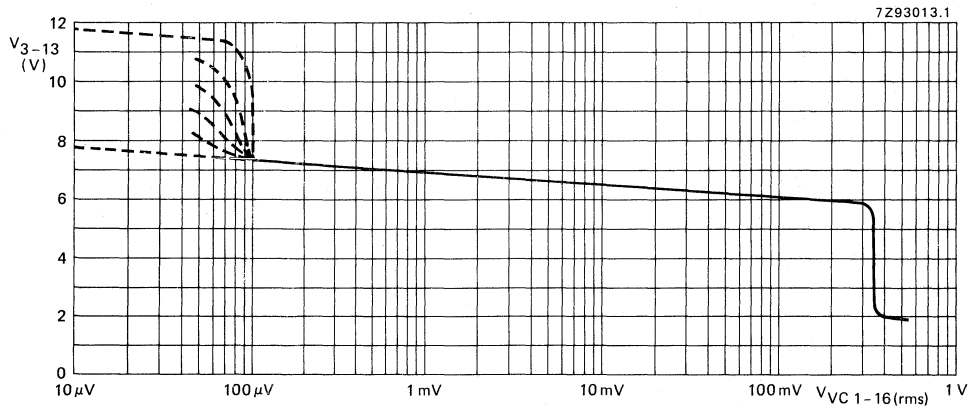


Fig. 3 Control voltage at pin 3 as a function of the input voltage  $V_{VC1-16}(rms)$ .

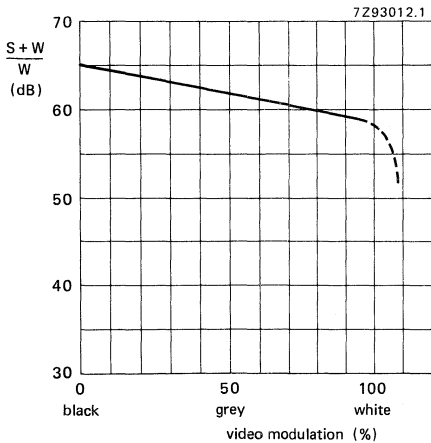


Fig. 4 Signal-to-weighted-noise ratio depending on video modulation.

## TELEVISION I.F. AMPLIFIER AND DEMODULATOR

## GENERAL DESCRIPTION

The TDA2548 is an i.f. amplifier and demodulator circuit for colour and black and white television receivers using p-n-p tuners.

It incorporates the following functions:

- gain-controlled wide-band amplifier, providing complete i.f. gain
- synchronous demodulator
- white spot inverter
- video preamplifier with noise protection
- a.g.c. circuit with noise gating
- tuner a.g.c. output (p-n-p tuners)
- VCR switch, which switches off the video output; e.g. for insertion of a VCR playback signal.


## QUICK REFERENCE DATA

Supply voltage	$V_{11-13}$	typ.	12 V
Supply current	$I_{11}$	typ.	50 mA
I.F. input voltage at $f = 38,9$ MHz (r.m.s. value)	$V_{1-16}(\text{rms})$	typ.	100 $\mu\text{V}$
Video output voltage (white at 10% of top sync)	$V_{12}(\text{p-p})$	typ.	2,7 V
I.F. voltage gain control range	$G_V$	typ.	64 dB
Signal-to-noise ratio at $V_i = 10$ mV	S/N	typ.	58 dB

## PACKAGE OUTLINES

TDA2548 : 16-lead DIL; plastic (SOT-38).

TDA2548Q: 16-lead QIL; plastic (SOT-58).

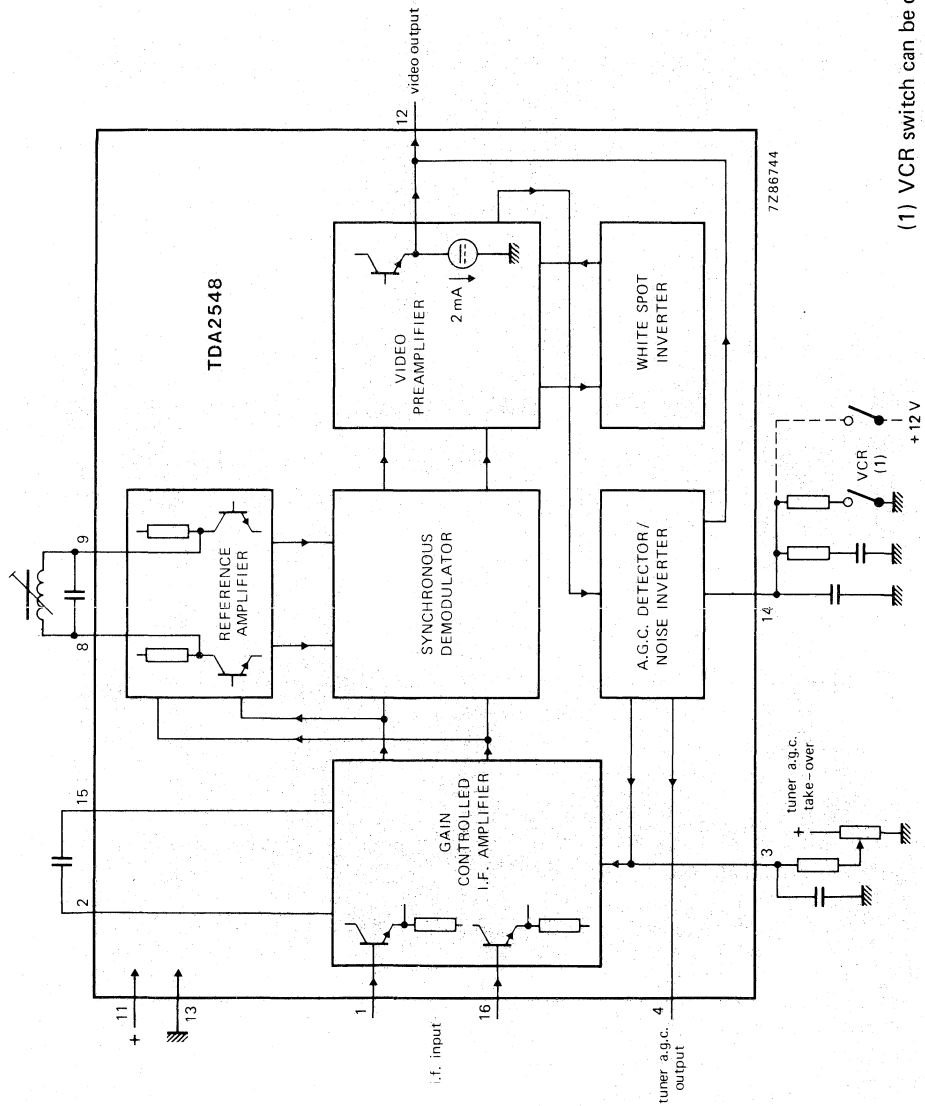

(1) VCR switch can be connected either to ground or to +12 V.

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_{11-13}$	max.	13,2 V
Tuner a.g.c. voltage	$V_{4-13}$	max.	12 V
Total power dissipation	$P_{tot}$	max.	900 mW
Storage temperature	$T_{stg}$		-55 to + 125 °C
Operating ambient temperature	$T_{amb}$		-25 to + 60 °C

**CHARACTERISTICS** (measured in Fig. 5)

Supply voltage range	$V_{11-13}$	typ.	12 V
			10,2 to 13,2 V
The following characteristics are measured at $T_{amb} = 25\text{ °C}$ ; $V_{11-13} = 12\text{ V}$ ; $f = 38,9\text{ MHz}$			
I.F. input voltage for onset of a.g.c. (r.m.s. value)	$V_{1-16(rms)}$	typ.	100 $\mu\text{V}$
		<	150 $\mu\text{V}$
Differential input impedance	$ Z_{1-16} $	typ.	2 k $\Omega$ in parallel with 2 pF
Zero-signal output level variation	$V_{12-13}$	typ.	5,95 V*
			$\pm 0,35\text{ V}$
Top sync output level	$V_{12-13}$	typ.	3,00 V
			2,85 to 3,15 V
I.F. voltage gain control range	$G_v$	typ.	64 dB
Bandwidth of video amplifier (3 dB)	B	typ.	6 MHz
Signal-to-noise ratio at $V_i = 10\text{ mV}$	S/N	typ.	58 dB**
Differential gain	dG	typ.	4 %
		<	10 %
Differential phase	$d\varphi$	typ.	2°
		<	10°

\* So-called 'projected zero point', e.g. with switched demodulator.

$$** \quad S/N = \frac{V_O \text{ black-to-white}}{V_{N(rms)} \text{ at } B = 5 \text{ MHz}}$$

CHARACTERISTICS (continued)

Intermodulation at 1,1 MHz: blue\*


> 46 dB  
typ. 60 dB

yellow\*

> 46 dB  
typ. 50 dB

at 3,3 MHz\*\*

> 46 dB  
typ. 54 dB

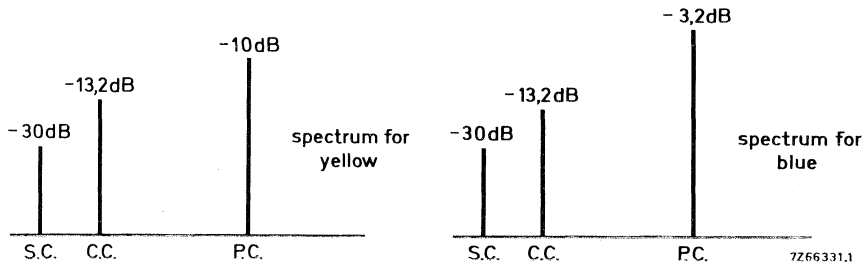

S.C. : sound carrier level  
C.C. : chrominance carrier level  
P.C. : picture carrier level

} with respect to top sync level

Fig. 2 Input conditions for intermodulation measurements; standard colour bar with 75% contrast.

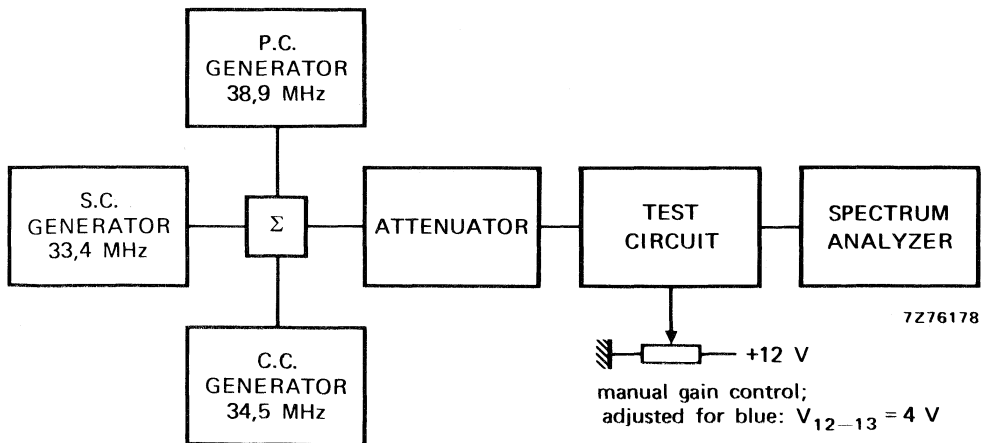


Fig. 3 Test set-up for intermodulation.

$$* 20 \log \frac{V_O \text{ at } 4,4 \text{ MHz}}{V_O \text{ at } 1,1 \text{ MHz}} + 3,6 \text{ dB.}$$

$$** 20 \log \frac{V_O \text{ at } 4,4 \text{ MHz}}{V_O \text{ at } 3,3 \text{ MHz}}$$

Carrier signal at video output	typ.	4 mV
	<	30 mV
2nd harmonic of carrier at video output	typ.	20 mV
	<	30 mV
White spot inverter threshold level (Fig. 4)	typ.	6,6 V
White spot insertion level (Fig. 4)	typ.	4,7 V
Noise inverter threshold level (Fig. 4)	typ.	1,8 V
Noise insertion level (Fig. 4)	typ.	3,8 V
External video switch (VCR) switches off the output at:	V <sub>14-13</sub>	< 1,1 V

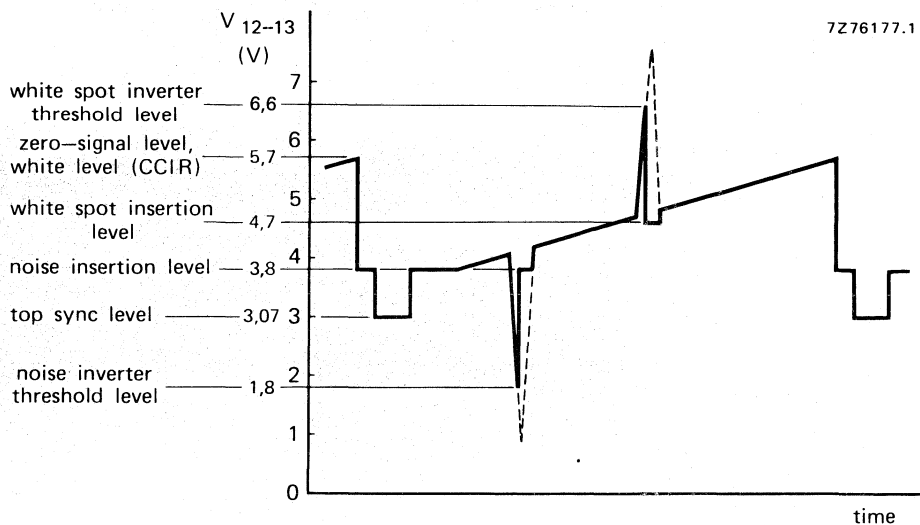


Fig. 4 Video output waveform showing white spot and noise inverter threshold levels.

Tuner a.g.c. output current range	I <sub>4</sub>	0 to 10 mA
Tuner a.g.c. output voltage at I <sub>4</sub> = 10 mA	V <sub>4-13</sub>	< 0,3 V
Tuner a.g.c. output leakage current	I <sub>4</sub>	< 15 μA
V <sub>14-13</sub> = 11 V; V <sub>4-13</sub> = 12 V		

APPLICATION INFORMATION

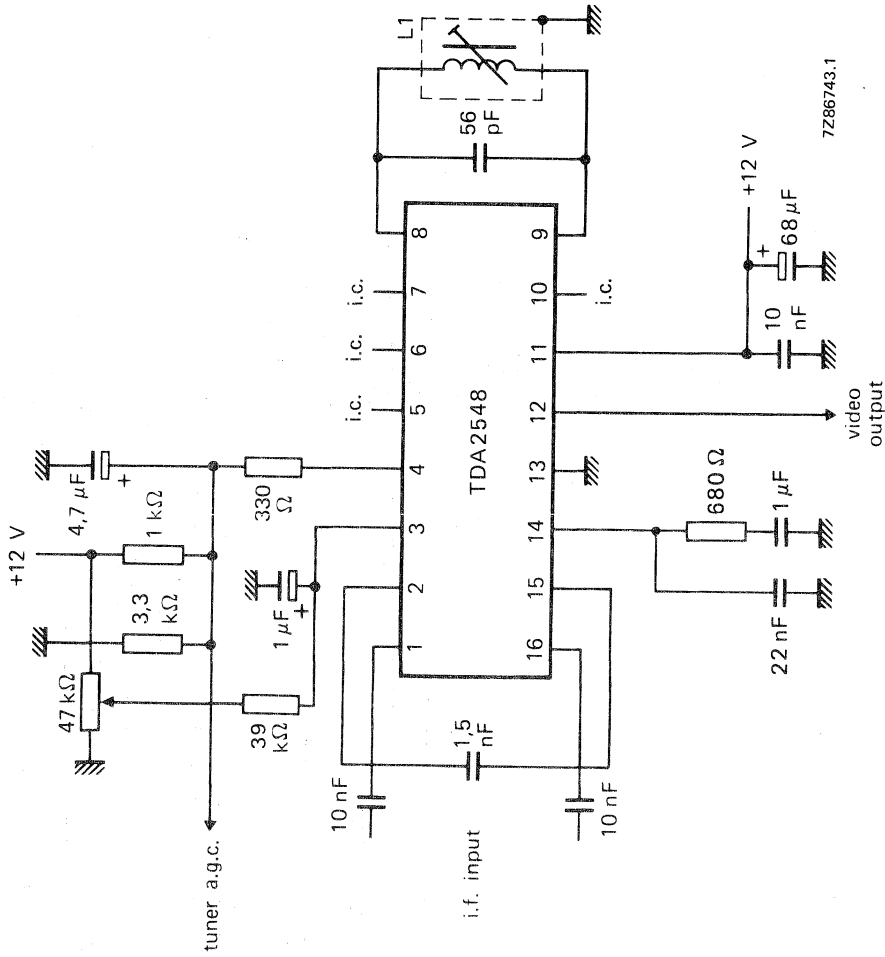


Fig. 5 Typical application circuit diagram; Q of L1  $\approx$  80;  $f_0$  38,9 MHz.



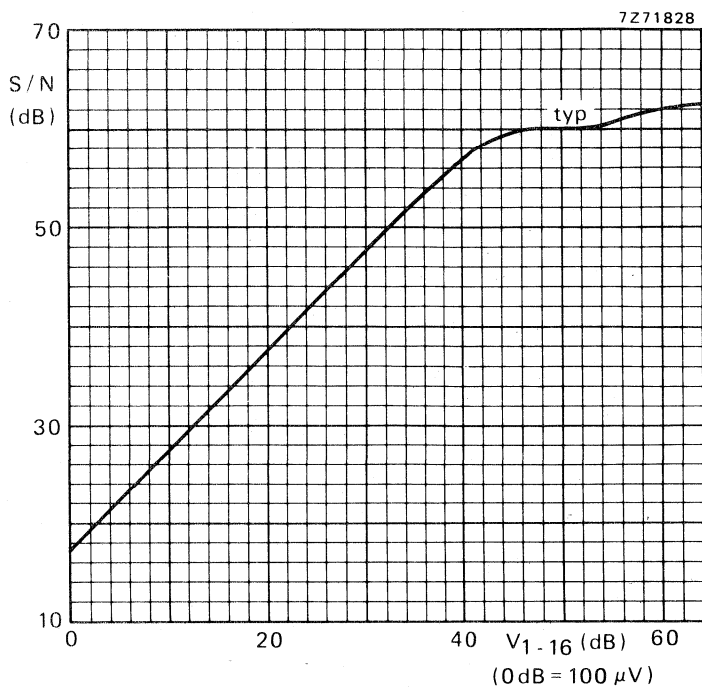


Fig. 6 Signal-to-noise ratio as a function of the input voltage ( $V_{1.16}$ ).



## I.F. AMPLIFIER AND DEMODULATOR FOR MULTISTANDARD TV RECEIVERS

### GENERAL DESCRIPTION

The TDA2549 is a complete i.f. circuit with a.f.c., a.g.c., demodulation and video preamplification facilities for multistandard television receivers. It is capable of handling positively and negatively modulated video signals in both colour and black/white receivers.

### Features

- Gain-controlled wide-band amplifier providing complete i.f. gain
- Synchronous demodulator for positive and negative modulation
- Video preamplifier with noise protection for negative modulation
- Auxiliary video input and output ( $75 \Omega$ )
- Video switch to select between auxiliary video input signal and demodulated video signal
- A.F.C. circuit with on/off switch and inverter switch
- A.G.C. circuit for positive modulation (mean level) and negative modulation (noise gate)
- A.G.C. output for controlling MOSFET tuners

### QUICK REFERENCE DATA

Supply voltage (pins 13 and 21)	$V_P = V_{13;21-3}$	typ.	12 V
Supply current (pins 13 and 21)	$I_P = I_{13;21-3}$	typ.	82 mA
I.F. input signal at $V_O = 2 \text{ V}$ (between pins 6 and 7)	$V_i = V_{6-7}$	typ.	50 $\mu\text{V}$
Video output voltage at $V_i = 0 \text{ V}$ (between pins 22 and 3)			
positive modulation	$V_O = V_{22-3}$	typ.	2 V
negative modulation	$V_O = V_{22-3}$	typ.	4 V
Gain control range	$G_V$	typ.	74 dB
Signal-to-noise ratio at $V_i = 10 \text{ mV}$	S/N	typ.	57 dB
A.F.C. output voltage swing (pin 15)	$V_{15-3}$	min.	10 V
Max. tuner a.g.c. output current (pin 10)	$I_{10}$	min.	0,3 mA
Video bandwidth (3 dB)	B	typ.	5,5 MHz
Auxiliary video input voltage (pin 12) at $V_O = 2 \text{ V}$ (peak-to-peak value)	$V_{12-3(p-p)}$	typ.	1 V
Auxiliary video output impedance (pin 14)	$ Z_{14-3} $	typ.	7 $\Omega$
Auxiliary video output voltage (pin 14)	$V_{14-3}$	typ.	2 V

### PACKAGE OUTLINE

24-lead DIL; plastic (SOT-101A).

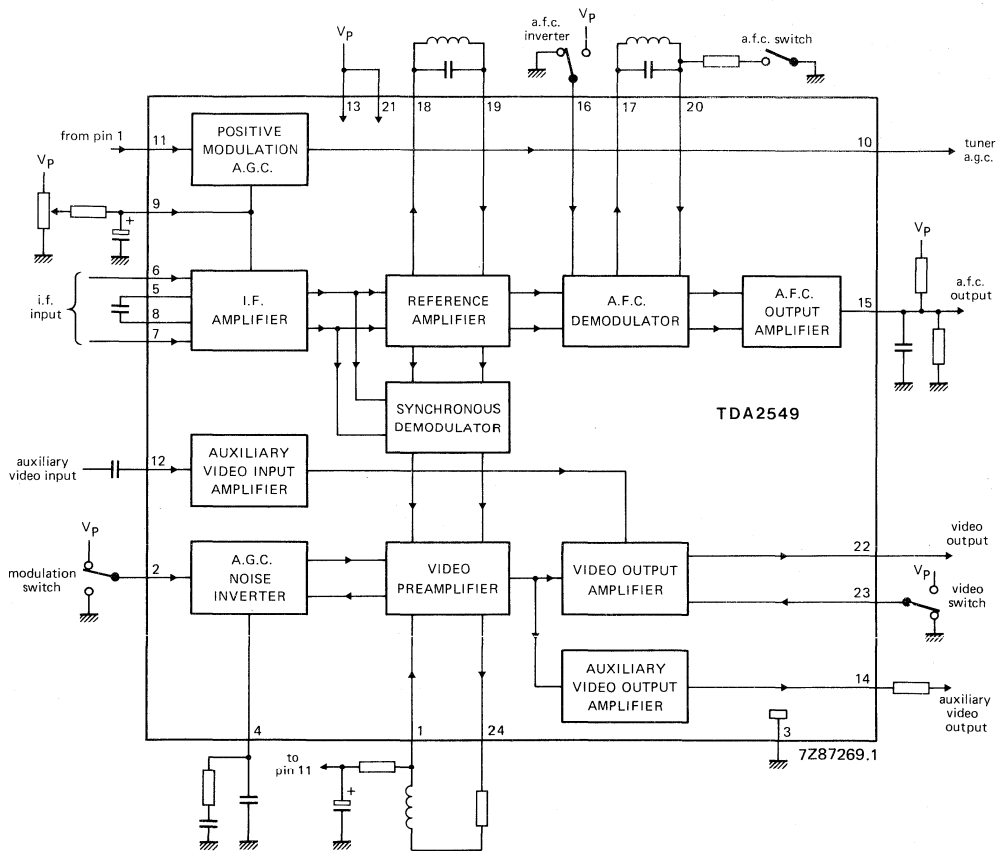


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pins 13 and 21)	$V_P$	13,8 V
Storage temperature range	$T_{stg}$	-25 to +125 °C
Operating ambient temperature range	$T_{amb}$	-25 to +70 °C

**CHARACTERISTICS** (measured in Fig. 5) $V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ 

paramater	symbol	min.	typ.	max.	unit
Supply voltage range	$V_P$	10,8	12	13,2	V
Supply current (pins 13 and 21)	$I_P$	—	82	—	mA
I.F. input signal for $V_O = 2\text{ V}$ (between pins 6 and 7)	$V_i = V_{6-7}$	—	50	150	$\mu\text{V}$
Input impedance (differential)	$ Z_{6-7} $	—	2	—	$\text{k}\Omega$
Input capacitance (differential)	$C_{6-7}$	—	2	—	pF
Zero signal output level positive modulation	$V_{22-3}$	1,6	2	2,3	V
negative modulation	$V_{22-3}$	3,7	4	4,3	V
Top sync output level	$V_{22-3}$	1,7	2	2,3	V
Gain control range	$G_V$	50	74	—	dB
Signal-to-noise ratio at $V_i = 10\text{ mV}$ (note 1)	S/N	50	57	—	dB
Maximum video output amplitude for positive modulation (peak-to-peak value)	$V_{22-3(p-p)}$	4,5	—	—	V
Bandwidth of video amplifier (3 dB)	B	—	5,5	—	MHz
Differential gain at $V_O = 2\text{ V}$	dG	—	4	10	%
Differential phase at $V_O = 2\text{ V}$	$d\varphi$	—	2	10	%
Residual carrier signal (r.m.s. value)	$V_{24-3(rms)}$	—	10	20	mV
Residual second harmonic of carrier signal (r.m.s. value)	$V_{24-3(rms)}$	—	20	60	mV

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
A.F.C. output voltage swing	V15-3	10	—	—	V
Change of frequency required for a.f.c. output voltage swing of 10 V	$\Delta f$	—	70	200	kHz
A.F.C. switch off for a voltage lower than:	V17-3	—	—	1,5	V
A.F.C. inverter switch positive a.f.c. (Fig. 2)	V16-3	0	—	1,5	V
negative a.f.c. (Fig. 3)	V16-3	4	—	12	V
<b>Tuner A.G.C.</b>					
Leakage current	I <sub>10</sub>	—	—	15	$\mu A$
Saturation voltage I <sub>10</sub> = 0,3 mA	V10-3	—	0,1	0,3	V
take-over point LOW	V <sub>i</sub>	—	—	3	mV
take-over point HIGH	V <sub>i</sub>	10	—	—	mV
Signal expansion at G <sub>V</sub> = 50 dB	$\Delta V_{22-3}$	—	—	0,5	dB
Negative modulation (Fig. 4)					
white spot inverter threshold level	V22-3	—	4,6	—	V
white spot insertion level	V22-3	—	3,2	—	V
noise inverter threshold level	V22-3	—	0,9	—	V
noise insertion level	V22-3	—	2,5	—	V
Positive modulation a.g.c. detector					
reference level	V11-3	3,0	3,2	3,4	V
Auxiliary video input signal for V <sub>O(p-p)</sub> = 2 V	V12-3	0,7	1	1,4	V
Auxiliary video output					
output signal (note 2)	V14-3	—	1	—	V
top sync level	V14-3	1	2	3	V
output impedance	Z <sub>14-3</sub>	—	7	—	$\Omega$
Levels for video switches					
positive video	V2-3	—	—	1	V
negative video	V2-3	3	—	—	V
internally demodulated signal	V23-3	—	—	1	V
auxiliary video signal	V23-3	3	—	—	V

## Notes to the characteristics

- Signal-to-noise ratio  $S/N = \frac{V_O \text{ black-to-white}}{V_{n(rms)} \text{ at } B = 5 \text{ MHz}}$ .
- Measured in application of Fig. 5.

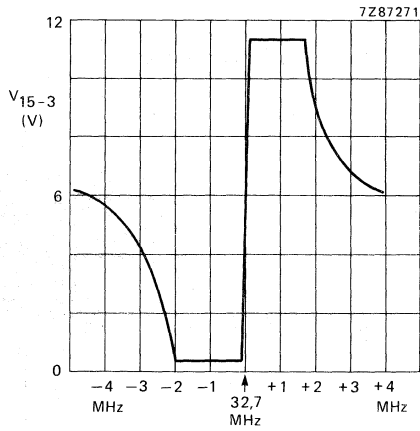


Fig. 2 A.F.C. output voltage  $V_{15-3}$  for positive a.f.c.

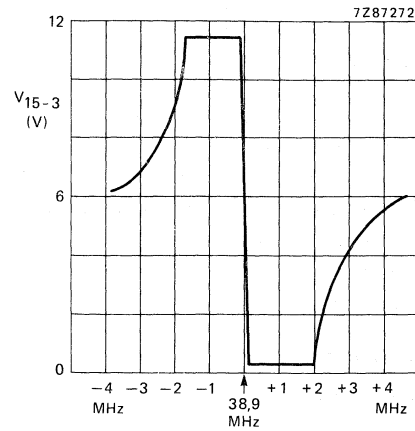


Fig. 3 A.F.C. output voltage  $V_{15-3}$  for negative a.f.c.

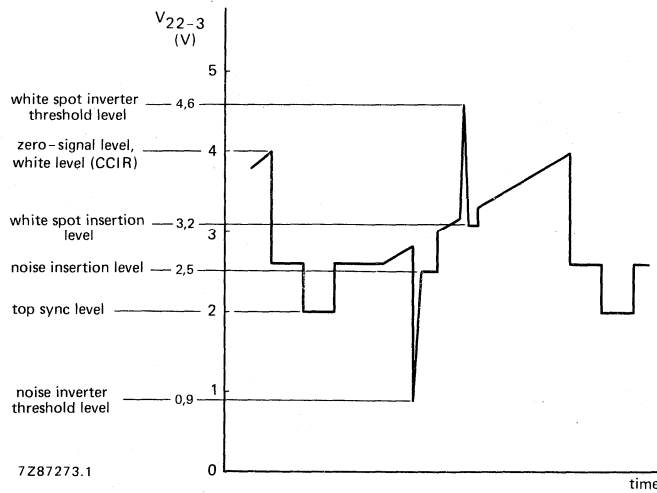


Fig. 4 Video output waveform showing white spot and noise inverter threshold levels.

APPLICATION INFORMATION

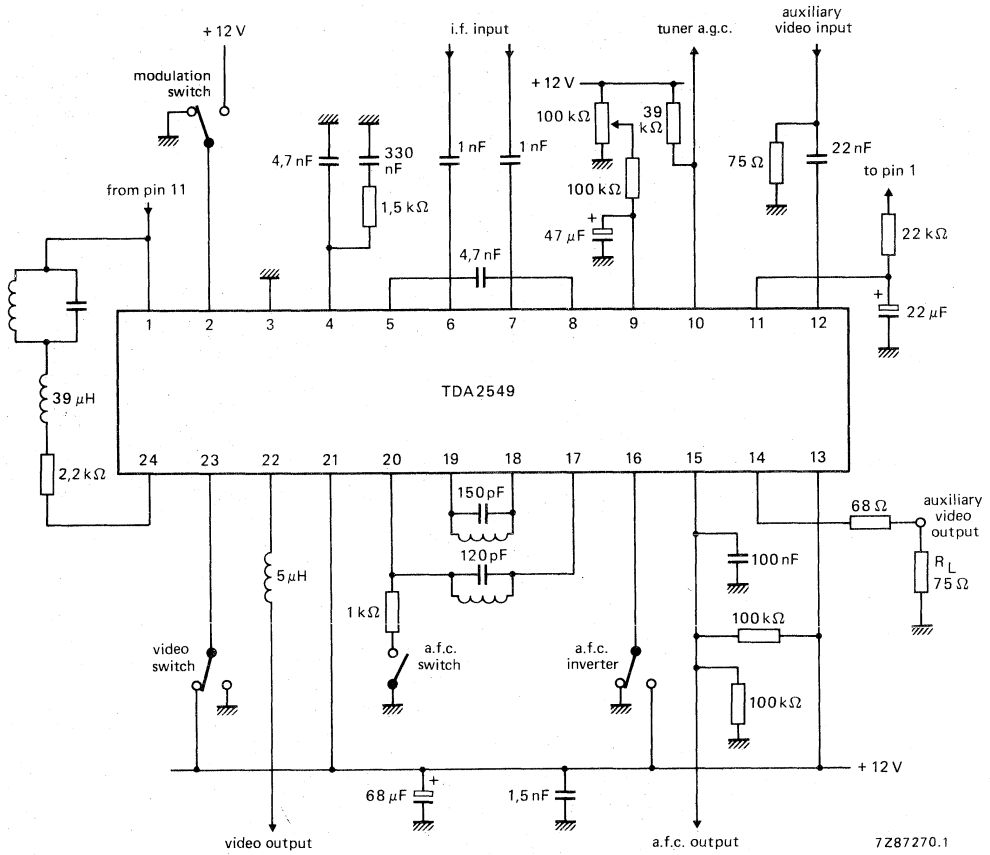


Fig. 5 Application diagram.



## DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA2555  
TDA2557

## DUAL TV SOUND DEMODULATOR CIRCUITS

### GENERAL DESCRIPTION

The circuits incorporate two FM demodulator systems to perform the demodulator functions required in a dual sound carrier TV system for demodulating the sound carriers.

The difference between TDA2555 and TDA2557 is the number of stages of the limiting amplifier.

- Eight (TDA2555) or five (TDA2557) stage limiting amplifier
- Quadrature demodulator for FM detection
- De-emphasis stage
- Output amplifier
- Mute function for each FM demodulator


### QUICK REFERENCE DATA

Supply voltage (pins 13 and 15)	V <sub>p</sub>	typ.	12 V
Supply current (pins 13 and 15)	I <sub>p</sub>	typ.	24,5 mA
AF output voltage (pins 2 and 8)	V <sub>o(rms)</sub>	typ.	600 mV
Total harmonic distortion (note 1)	THD	<	0,1 %
Signal to weighted noise ratio	(S + N)/N	typ.	70 dB

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

TDA2555  
TDA2557

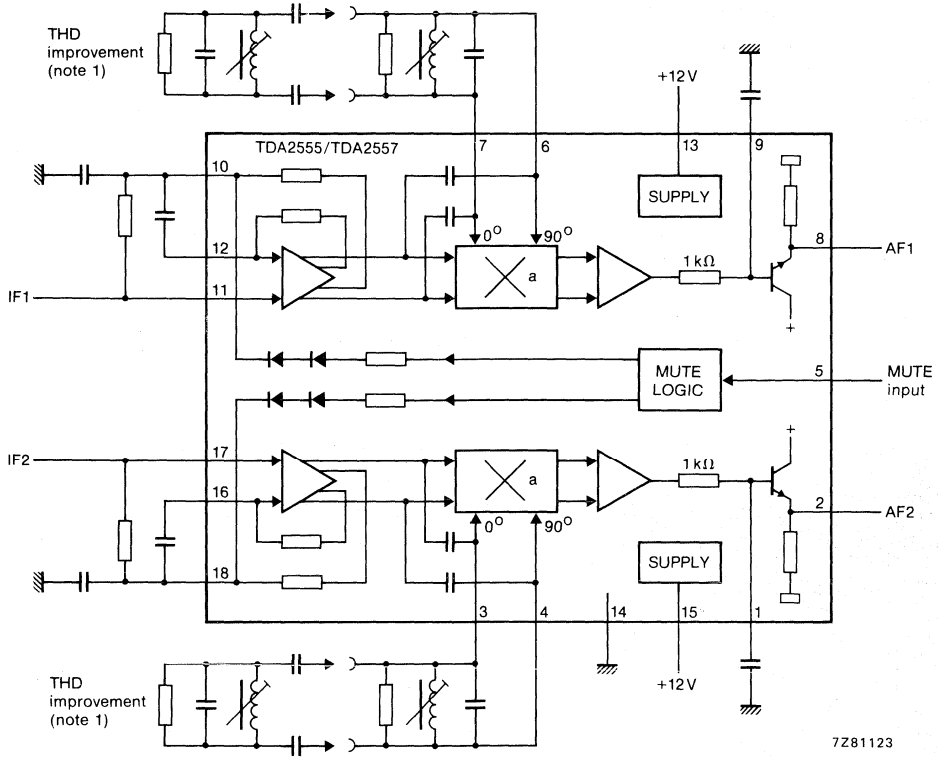

7Z81123

a = QUADRATURE DEMODULATOR

Fig. 1 Block diagram.  
TDA2555 with 8-stage limiting amplifier;  
TDA2557 with 5-stage limiting amplifier.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pins 13 and 15)	$V_p$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	400 mW
Storage temperature range	$T_{stg}$	-40 to + 150 °C	
Operating ambient temperature	$T_{amb}$	0 to + 70 °C	

**CHARACTERISTICS**

$V_p = V_{13, 15-14} = 12$  V;  $T_{amb} = 25$  °C;  $f_{IF1} = 5,5$  MHz;  $f_{IF2} = 5,74$  MHz;  $f_{m1} = 1$  kHz;  
 $\Delta f = \pm 30$  kHz;

 $V_{i(rms)} = 5$  mV for TDA2555; $V_{i(rms)} = 10$  mV for TDA2557;

see test circuit Fig. 3, voltages with respect to ground (pin 14), unless otherwise specified.

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
Total current consumption	$I_{13,15}$	18	24,5	30	mA
<b>LIMITING AMPLIFIER</b>					
Maximum input voltage	$V_{11-12(rms)}$ $V_{16-17(rms)}$	—	200	—	mV
Input voltage for start of limiting (3 dB AF signal reduction)					
TDA2555	$V_{11-12(rms)}$ $V_{16-17(rms)}$	—	50	100	$\mu$ V
TDA2557	$V_{11-12(rms)}$ $V_{16-17(rms)}$	—	250	500	$\mu$ V
DC voltage (input limiting amplifier) pins 11, 12, 16, 17 to 14	$V_i$	—	2,0	—	V
DC voltage (feedback loop)	$V_{10,18-14}$	—	2,0	—	V
<b>FM DEMODULATOR</b>					
IF reference signal voltage	$V_{3-4(rms)}$ $V_{6-7(rms)}$	—	200	—	mV
DC voltage	$V_{3,4,6,7-14}$	—	3,1	—	V
AF output voltage	$V_{2-14(rms)}$	450	600	750	mV
Difference of output signals	$\frac{V_{2-14}}{V_{8-14}}$	—	$\pm 0,1$	$\pm 0,5$	dB
Total harmonic distortion at outputs AF1 and AF2 (note 1)	THD	—	—	0,5	%
A.M. suppression at outputs AF1 and AF2, $f_{FM} = 70$ Hz; $\Delta f = \pm 50$ kHz; $f_{AM} = 1$ kHz; $m = 0,3$	AMS	50	—	—	dB

CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>FM DEMODULATOR (continued)</b>					
Signal to noise ratio at outputs AF1 and AF2 (CCIR weighted, quasi peak)	(S + N)/N	65	70	—	dB
Residual IF-signal without deemphasis	$V_{2,8-14}(\text{rms})$	—	30	—	mV
Ripple rejection at outputs AF1 and AF2 f = 50 Hz to 20 kHz; $V_{i(\text{rms})} = 200 \text{ mV}$	RR	—	40	—	dB
<b>AUDIO OUTPUT STAGE</b>					
emitter follower with 1,0 mA bias current					
DC output voltage	$V_{2,8-14}$	3,0	4,0	5,0	V
External DC load resistance	$R_{2,8-14}$	2	—	—	k $\Omega$
AC output current (note 2)	$-I_{2,8-14}(\text{p-p})$	—	—	0,5	mA
Deemphasis input resistance (note 3)	$R_{1,9-14}$	0,8	1,0	1,2	k $\Omega$
DC voltage (deemphasis)	$V_{1,9-14}$	3,7	4,7	5,7	V
Crosstalk attenuation f = 1 kHz (note 4)	$\alpha_{12,21}$	60	—	—	dB
Crosstalk attenuation f = 10 kHz (note 4)	$\alpha_{12,21}$	60	—	—	dB
Output impedance	$R_{2,8-14}$	—	25	—	$\Omega$
AF output level (Fig. 2, note 5)					
MUTE function					
$V_{i(\text{rms})} < 60 \text{ mV}$	$\alpha$	60	—	—	dB
Switching input current					
$V_{5-14} = 0 \text{ V}$	$-I_5$	—	—	500	$\mu\text{A}$
$V_{5-14} = V_p$	$I_5$	—	—	500	$\mu\text{A}$
Internal d.c. voltage no mute (pin 5 not connected)	$V_{5-14}$	—	6,2	—	V

Notes to the characteristics

1. THD < 0,1% requires a double tuned demodulator circuit ( $Q_L = 20$ ). With a single tuned circuit a THD of < 0,5% is possible (see Figs 1 and 3).
2. If higher a.c. output current is required an external resistor must be applied from output (pins 2 and 8) to ground (min. 2 k $\Omega$ ) in order to improve the THD performance ( $-I_{2,8} < 4 \text{ mA}$ ).
3. The deemphasis time constant is 50  $\mu\text{s}$ .
4. Crosstalk attenuation is defined as:

$$\alpha_{12} = \frac{V_{2-14} \text{ unmodulated}}{V_{8-14}} \quad \alpha_{21} = \frac{V_{8-14} \text{ unmodulated}}{V_{2-14}}$$

5. In the MUTE state the a.f. output level attenuation is more than 60 dB. The MUTE function is only guaranteed for an r.m.s. value of the input voltage lower than 60 mV. See also Fig. 2.

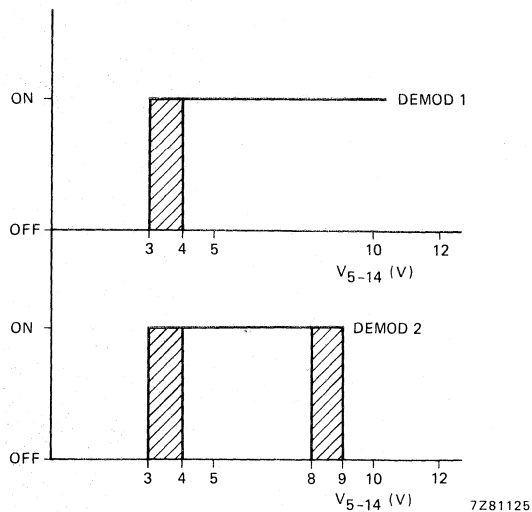


Fig. 2 Mute function.

DEVELOPMENT DATA

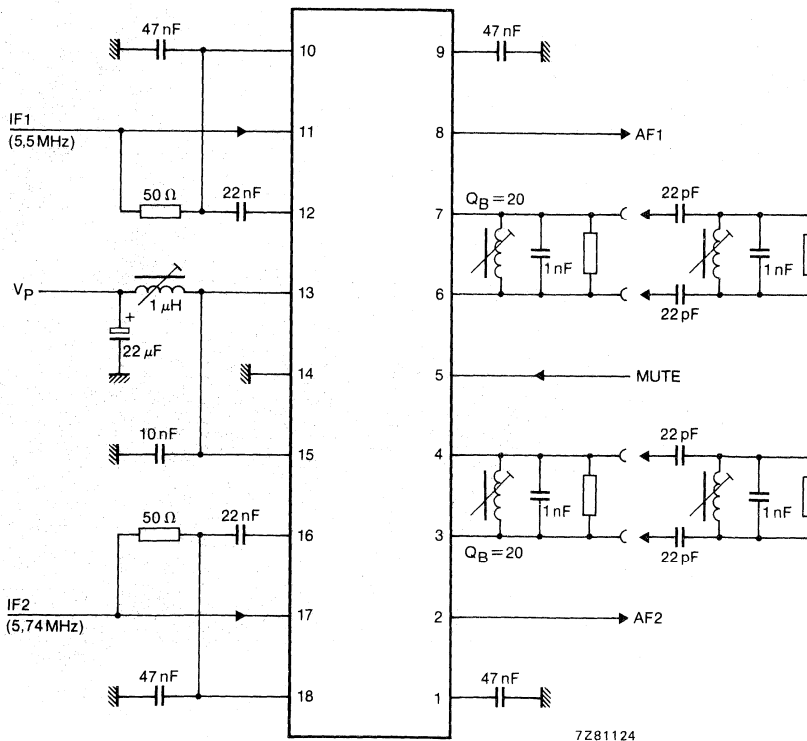


Fig. 3 Test and application circuit.



## QUASI-SPLIT-SOUND CIRCUIT WITH DUAL SOUND DEMODULATORS

### GENERAL DESCRIPTION

The TDA2556 is a monolithic integrated circuit for quasi-split-sound processing, including two FM demodulators, for two carrier stereo TV receivers and VTR.

### Features

First IF (vision carrier plus sound carrier).

- 3 stage gain controlled IF amplifier
- AGC circuit
- Reference amplifier and limiter amplifier for vision carrier (V.C.) processing
- Linear multiplier for quadrature demodulation

Second IF (two separate channels for both FM sound signals).


- 4-stage-limiting amplifier
- Quadrature demodulator
- AF amplifier with de-emphasis
- Output buffer
- Muting for one or both AF outputs

### QUICK REFERENCE DATA

Supply voltage, pin 23	$V_P = V_{23-24}$	typ.	12 V
Supply current, pin 23	$I_P = I_{23}$	typ.	73 mA
Minimum IF vision carrier input voltage (rms value)	$V_{VC} = V_{3-4}$	typ.	150 $\mu$ V
IF control range	$\Delta G_V$	typ.	64 dB
AF output voltage	$V_O$ 10, 15-24(rms)	typ.	600 mV
Signal-to-weighted-noise ratio (relative to 1 kHz; 30 kHz deviation)			
at 5,5 MHz	for 2T/20T pulses with white bars	S + W/W	typ. 58 dB
at 5,74 MHz		S + W/W	typ. 56 dB

### PACKAGE OUTLINE

24-lead DIL; plastic (SOT-101B).

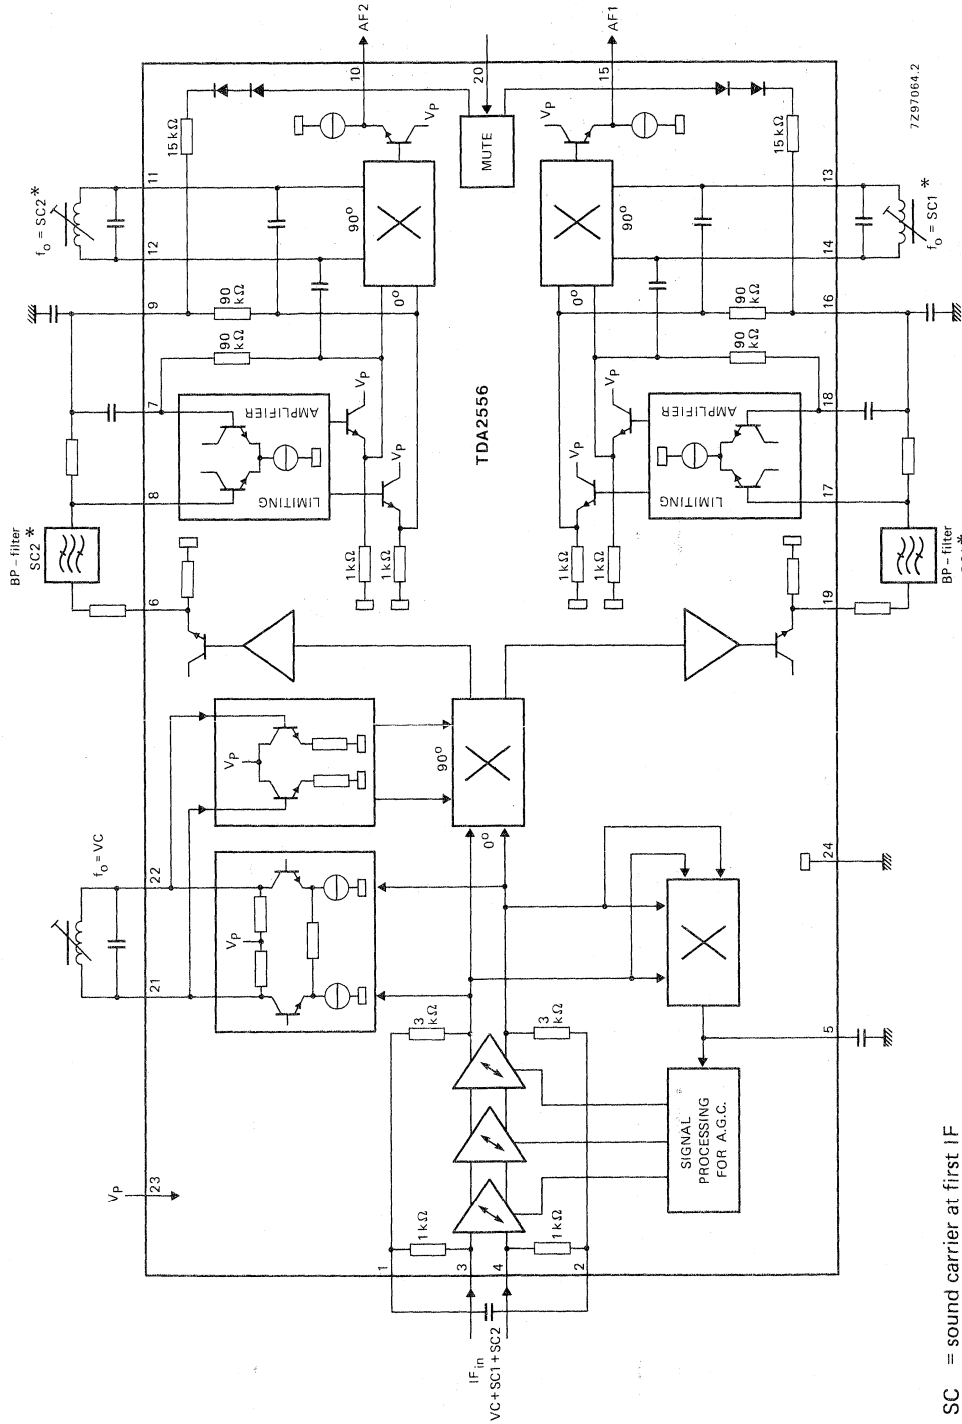

729/064.2

Fig. 1 Block diagram.

SC = sound carrier at first IF  
 SC\* = sound carrier at second IF



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage, pin 23	$V_P = V_{23-24}$	max.	13,2 V
Supply current, pin 23	$I_P = I_{23}$	max.	95 mA
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

**CHARACTERISTICS**

$V_P = V_{23-24} = 12$  V;  $T_{amb} = 25$  °C; measured at  $f_{VC} = 38,9$  MHz,  $f_{SC1} = 33,4$  MHz,  $f_{SC2} = 33,158$  MHz.

Vision carrier (V.C.) modulated with different video signals (see below); modulation depth 100% (proportional to 10% residual carrier).

Vision carrier amplitude:  $V_{VC(rms)} = 10$  mV.

Vision-to-sound carrier ratios: VC/SC1 = 13 dB, VC/SC2 = 20 dB.

Sound carrier (SC1, SC2) modulated with  $f = 1$  kHz and deviation  $\Delta f = \pm 30$  kHz.

For measuring circuit see Fig. 2; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 23)</b>					
Supply voltage	$V_P = V_{23-24}$	10,8	12	13,2	V
Supply current	$I_P = I_{23}$	—	73	95	mA
<b>First IF amplifier</b>					
Input voltage for start of gain control (intercarrier signals -3 dB)	$V_{VC} = V_{3-4} (rms)$	—	150	200	$\mu V$
Input voltage for end of gain control (intercarrier signals +1 dB)	$V_{VC} = V_{3-4} (rms)$	100	250	—	mV
Gain control range	$\Delta G_V$	60	64	—	dB
Control voltage range (see Fig. 6)	$V_{5-24}$	4	—	$V_P$	V
Input resistance (differential)	$R_{3-4}$	—	2	—	k $\Omega$
Input capacitance (differential)	$C_{3-4}$	—	2	—	pF
<b>Intercarrier signal</b>					
Output voltage; 5,5 MHz (SC1*)	$V_{19-24}(rms)$	60	100	140	mV
Output voltage; 5,742 MHz (SC2*)	$V_{6-24}(rms)$	27	45	63	mV
Output voltage d.c. (emitter follower with minimum 1,5 mA bias current)	$V_{6-24/19-24}$	—	5,9	—	V
Allowable d.c. load resistance	$R_{6-24/19-24}$	7	—	—	k $\Omega$
<b>Second IF</b>					
Input voltage for start of limiting	$V_{8-24/17-24}(rms)$	—	700	—	$\mu V$
Maximum input voltage	$V_{8-24/17-24}(rms)$	—	200	—	mV
Voltage level d.c.	$V_{7-24/18-24}$	—	2,2	—	V
Voltage level d.c.	$V_{9-24/16-24}$	—	2,2	—	V

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Second IF (continued)</b>					
AF output voltage	V <sub>10-24/15-24</sub>	450	600	810	mV
Output voltage d.c. (emitter follower with 1,0 mA bias current)	V <sub>10-24/15-24</sub>	—	4,5	—	V
External d.c. load resistance	R <sub>10-24/15-24</sub>	2	—	—	kΩ
External a.c. load current (note 5)	I <sub>10/15</sub>	—	—	0,5	mA
Total harmonic distortion of V <sub>10-24/15-24</sub> (note 3)	THD	—	0,4	1	%
(note 4)	THD	—	—	0,1	%
AM suppression; f <sub>AM</sub> = 1 kHz, M = 0,3; f <sub>FM</sub> = 70 Hz; f = ± 50 kHz (note 2)		50	60	—	dB
Crosstalk attenuation (note 2)		60	—	—	dB
S/N ratio (second IF) (note 2) f = 1 kHz; f = ± 50 kHz	V <sub>10-24/15-24</sub>	65	70	—	dB
<b>Mute (see Fig. 4)</b>					
Switching voltage for:					
demodulator 1 ON	V <sub>20-24</sub>	4	—	V <sub>p</sub>	V
demodulator 1 OFF	V <sub>20-24</sub>	0	—	3	V
demodulator 2 ON	V <sub>20-24</sub>	4	—	8	V
demodulator 2 OFF	V <sub>20-24</sub>	0 or 9	—	3 or V <sub>p</sub>	V
Input current	I <sub>20</sub>	—500	—	+ 200	μA
Input d.c. potential	V <sub>20-24</sub>	—	6,3	—	V
<b>AF signal performance, weighted S/N ratio at audio outputs, pins 10, 15;</b>					
V <sub>3-4</sub> = 20 mV rms weighted according to CCIR 468-2, quasi-peak, (see note 1)					
(a) 2T/20T pulse with white bars (see also Fig. 5)					
at 5,5 MHz	(S + W)/W	—	58	—	dB
at 5,74 MHz	(S + W)/W	—	56	—	dB
(b) 6 kHz sine wave					
at 5,5 MHz	(S + W)/W	—	52	—	dB
at 5,74 MHz	(S + W)/W	—	50	—	dB
(c) black level (sync pulses only)					
at 5,5 MHz	(S + W)/W	—	65	—	dB
at 5,74 MHz	(S + W)/W	—	63	—	dB

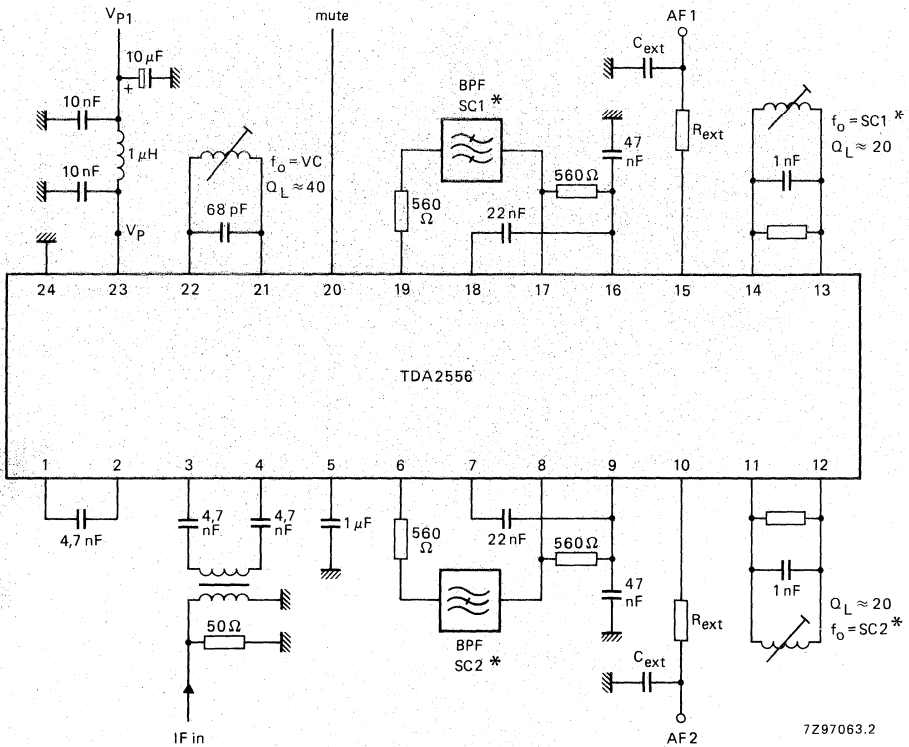


Fig. 2 Application diagram ( $\tau_{deemph} = R_{ext} \cdot C_{ext}$ )  
(Input transformer "IF in" only for testing)

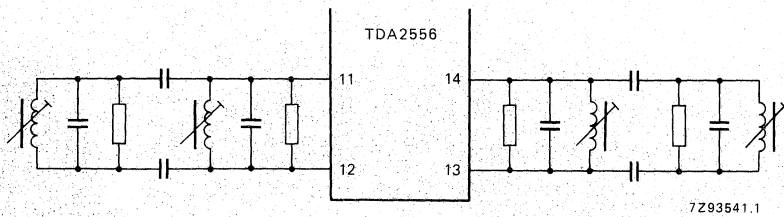


Fig. 3 Distortion improvement (see note 3 and 4).

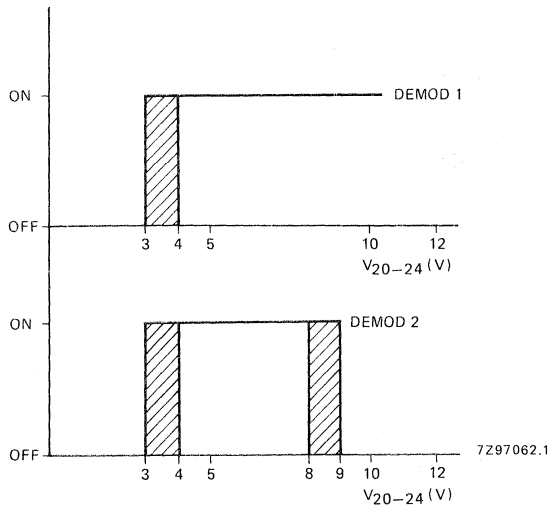


Fig. 4 Mute function.

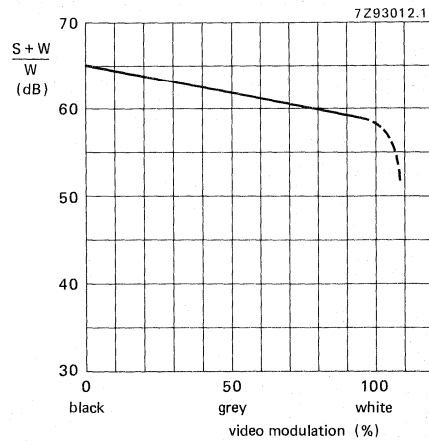


Fig. 5 Signal to weighted noise ratio depending on video modulation.

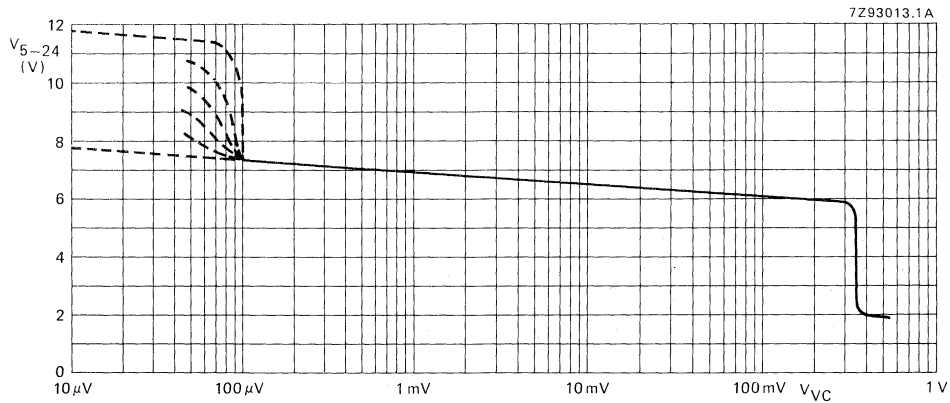


Fig. 6 Control voltage at pin 5 as a function of the input voltage  $V_{VC} = V_{3-4}(rms)$ .

**Notes to the characteristics**

1. Incidental phase on the vision carrier, caused by the TV transmitter, has to be less than 0,5 degrees for black and white transient; this is equivalent to  $S + W/W = 56$  dB for a 6 kHz sine wave.
2. Input signal second IF  $V_{8-24}/V_{17-24} = 10$  mVrms.
3. THD value is valid for ceramic bandpass filters of SC\* and single resonance circuits at pins 11 and 12 and pins 13 and 14.
4. THD value is valid for LC bandpass filters of SC\* and double resonance circuits at pins 11 and 12 and pins 13 and 14.
5. If higher a.c. output current is required an external resistor has to be applied from output (pins 10 and 15) to ground (minimum 2 k $\Omega$ ) in order to improve the THD performance.

## SYNCHRONIZATION CIRCUIT WITH VERTICAL OSCILLATOR AND DRIVER STAGES

### GENERAL DESCRIPTION

The TDA2577A separates the vertical and horizontal sync pulses from the composite TV video signal and uses them to synchronize horizontal and vertical oscillators.

#### Features

- Horizontal sync separator and noise inverter
- Horizontal oscillator
- Horizontal output stage
- Horizontal phase detector (sync to oscillator)
- Time constant switch for phase detector (fast time constant during catching)
- Slow time constant for noise only conditions
- Time constant externally switchable (e.g. fast for VCR)
- Inhibit of horizontal phase detector and video transmitter identification circuit during vertical oscillator flyback
- Second phase detector ( $\varphi_2$ ) for storage compensation of horizontal deflection stage
- Sandcastle pulse generator (3-levels)
- Video transmitter identification circuit
- Stabilizer and supply circuit for starting the horizontal oscillator and output stage directly from the mains rectifier
- Duty factor of horizontal output pulse is 50% when flyback pulse is absent
- Vertical sync separator
- Bandgap 6,5 V reference voltage for vertical oscillator and comparator
- Synchronized vertical oscillator/sawtooth generator (synchronization inhibited when no video transmitter is detected)
- Internal circuit for 3% parabolic pre-correction of the oscillator/sawtooth generator. Comparator supplied with pre-corrected sawtooth and external feedback input
- Vertical comparator with internal 3% pre-correction circuit for vertical oscillator/sawtooth generator
- Vertical driver stage
- Vertical blanking pulse generator with external adjustment of pulse duration (50 Hz: 21 lines; 60Hz: 17 lines)
- Vertical guard circuit

### QUICK REFERENCE DATA

#### Supply

Minimum current required to start horizontal oscillator and output stage (pin 16)

Main supply voltage (pin 10)

Supply current

$I_{16}$	>	4,5 mA
$V_P = V_{10-9}$	typ.	12 V
$I_P = I_{10}$	typ.	55 mA

#### Input signals

Sync pulse input voltage (peak-to-peak value; negative-going)

$V_{5-9(p-p)}$	0,15 to 1 V
----------------	-------------

#### Output signals

Horizontal output pulse (open collector) at  $I_{11} = 40$  mA

Vertical output pulse (emitter-follower) at  $I_1 = 10$  mA

$V_{11-9}$	<	0,5 V
$V_{1-9}$	>	4 V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

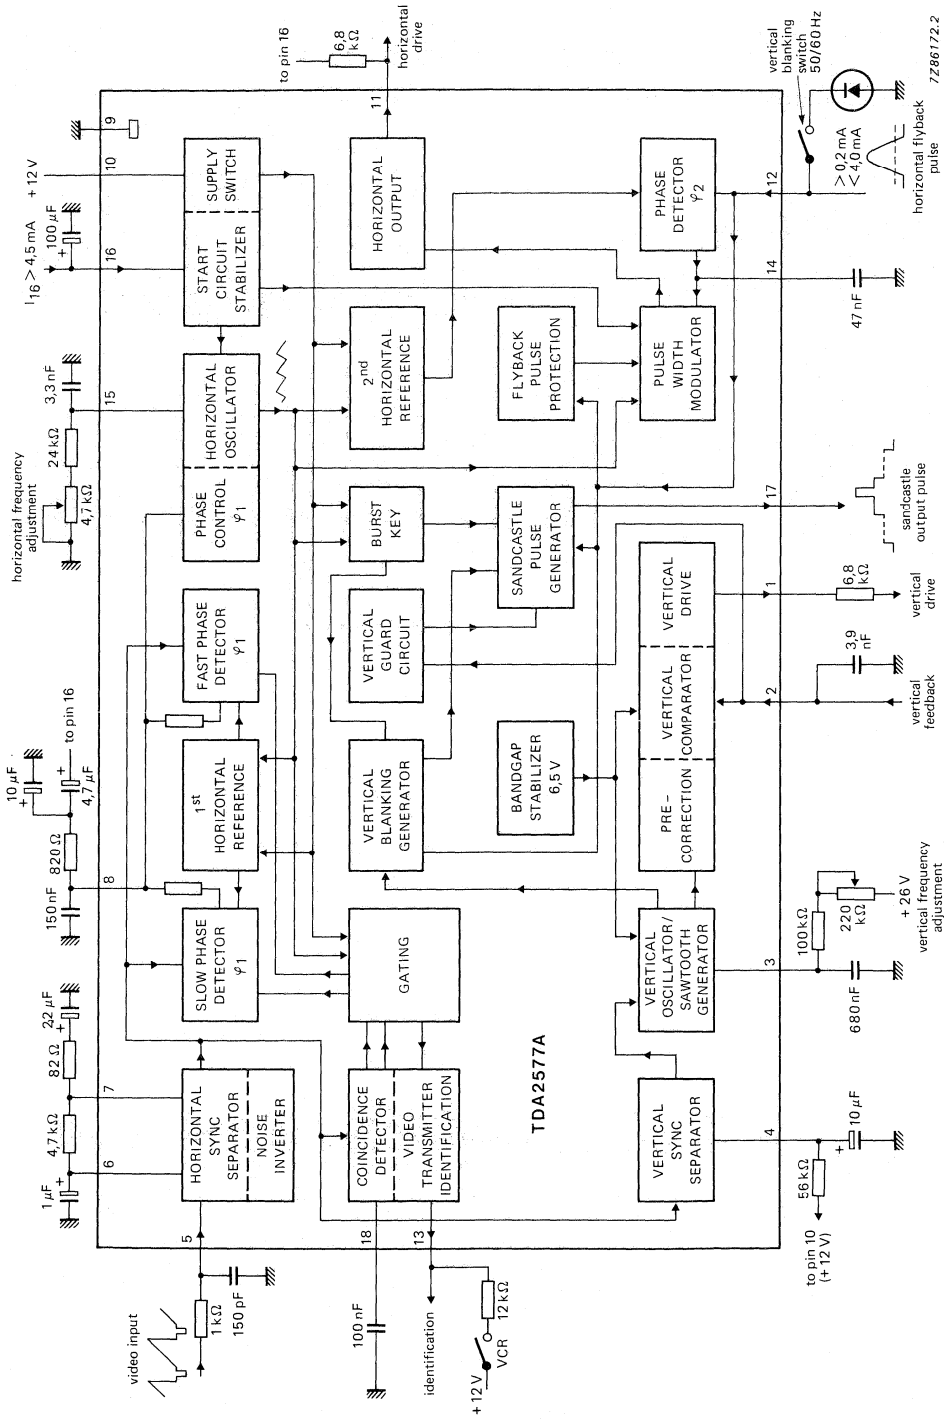


Fig. 1 Block diagram.

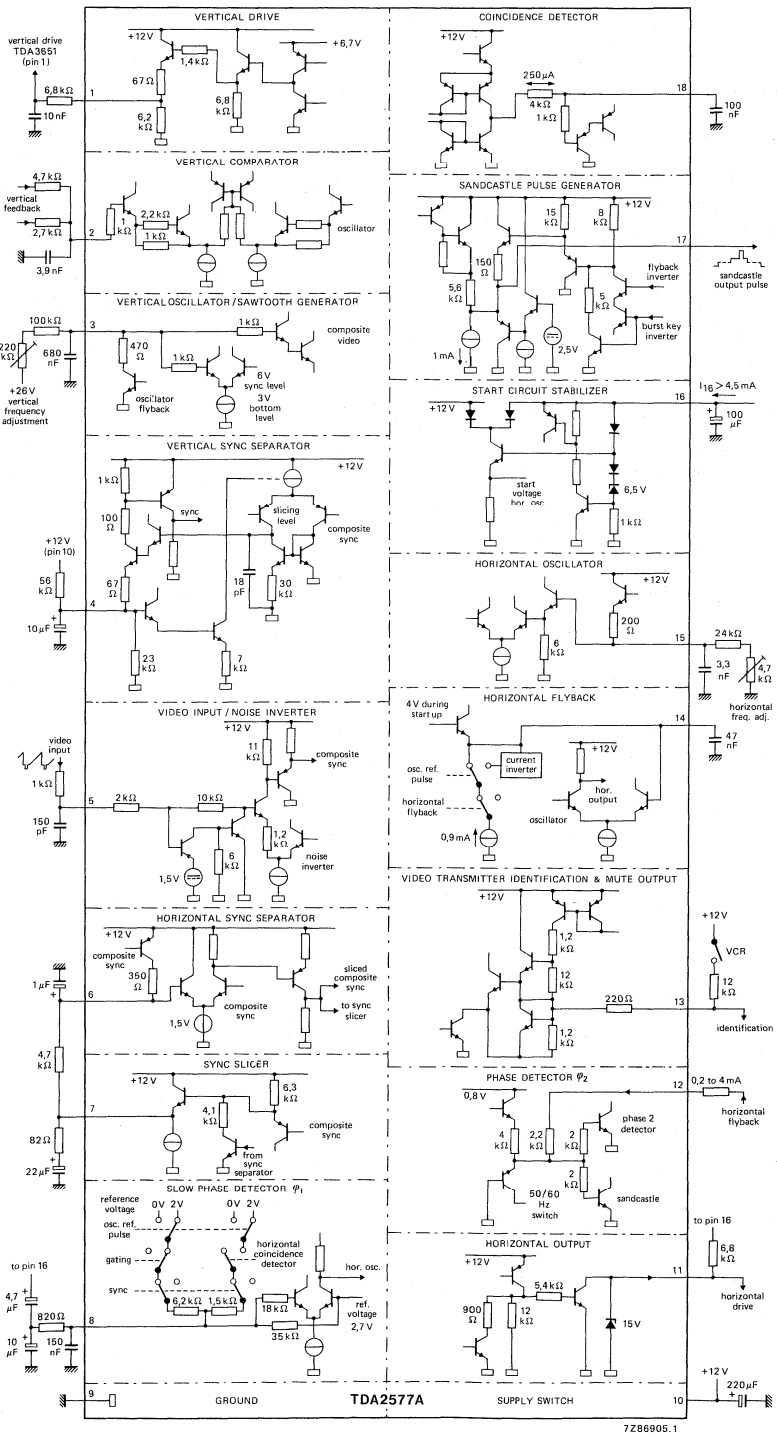


Fig. 2 TDA2577A circuit diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Start current (pin 16)	$I_{16}$	max.	8 mA
Supply voltage (pin 10)	$V_P = V_{10-9}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,1 W
Storage temperature range	$T_{stg}$		-55 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-25 to + 65 °C

**THERMAL RESISTANCE**

From junction to ambient in free air	$R_{th\ j-a}$	typ.	50 K/W
--------------------------------------	---------------	------	--------

**CHARACTERISTICS** $I_{16} = 5\text{ mA}$ ;  $V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified**Supply**

Supply current at pin 16	$I_{16}$		4,5 to 8 mA
Stabilized supply voltage (pin 16)	$V_{16-9}$	typ.	8,7 V
			8,0 to 9,5 V
Supply current (pin 10)	$I_{10}$	typ.	55 mA
		<	70 mA
Supply voltage (pin 10)	$V_P = V_{10-9}$	typ.	12 V
			10 to 13,2 V

**Video input (pin 5)**

Top-sync level	$V_{5-9}$	typ.	3,1 V
			1,5 to 3,75 V
Sync pulse amplitude (peak-to-peak value) (note 1)	$V_{5-9(p-p)}$	typ.	0,6 V
			0,15 to 1 V
Slicing level		typ.	50 %
			35 to 65 %
Delay between video input and detector output	$t_1$	typ.	0,35 $\mu\text{s}$

**Noise gate (pin 5)**

Switching level	$V_{5-9}$	typ.	0,7 V
		<	1 V

**First control loop (sync to oscillator; pin 8)**

Holding range	$\Delta f$	typ.	$\pm 800\text{ Hz}$
Catching range	$\Delta f$	typ.	$\pm 800\text{ Hz}$
			$\pm 600\text{ to } \pm 1100\text{ Hz}$

Control sensitivity video with respect to oscillator, burst key and flyback pulse

for slow time constant		typ.	1 kHz/ $\mu\text{s}$
for fast time constant		typ.	2,75 kHz/ $\mu\text{s}$



**Second control loop** (horizontal output to flyback; pin 14)

Control sensitivity; static (see note 2)	$\Delta t_d / \Delta t_o$	typ.	400 $\mu s / \mu s$
Control range	$t_d$		1 to 50 $\mu s$
Controlled edge	negative		

**Phase adjustment** (via 2nd control loop; pin 14)

Control sensitivity		typ.	25 $\mu A / \mu s$
Maximum permissible control current	$\pm I_{14}$	<	60 $\mu A$

**Horizontal oscillator** (pin 15)

Frequency (no sync)	$f_{osc}$	typ.	15 625 Hz
Frequency spread ( $C_{osc} = 3,3 \text{ nF}$ ; $R_{osc} = 24 \text{ k}\Omega$ )	$\Delta f_{osc}$	<	4 %
Frequency deviation between starting point of output signal and stabilized condition	$\Delta f_{osc}$	typ.	6 %
		<	8 %
Temperature coefficient	TC	typ.	$1 \cdot 10^{-4} \text{ K}^{-1}$

**Horizontal output** (pin 11)

Output voltage; high level	$V_{11-9}$	<	13,2 V
Voltage at which protection starts	$V_{11-9}$		13 to 15,8 V
Output voltage; low level	$V_{11-9}$	typ.	0,3 V
start condition at $I_{11} = 10 \text{ mA}$		<	0,5 V
normal condition at $I_{11} = 40 \text{ mA}$	$V_{11-9}$	typ.	0,3 V
		<	0,5 V
Duty factor of output signal during starting (no phase shift; voltage at pin 11 low)	$\delta$	typ.	65 %
Duty factor of output signal without flyback pulse	$\delta$	typ.	50 %
			47 to 57 %
Controlled edge	negative		
Duration of output pulse (see Fig. 3)			$t_d + t_o + 2,5 \mu s$

**Sandcastle output pulse** (pin 17)

Output voltage during: burst key	$V_{17-9}$	>	10 V
horizontal blanking	$V_{17-9}$	typ.	4,6 V
			4,2 to 5 V
vertical blanking	$V_{17-9}$	typ.	2,5 V
			2 to 3 V
Pulse duration			
burst key	$t_p$	typ.	3,7 $\mu s$
horizontal blanking			3,3 to 4,1 $\mu s$
vertical blanking			flyback pulse (see note 3)
for 50 Hz application ( $-I_{12} : 0$ to 0,1 mA)			21 lines
for 60 Hz application ( $-I_{12} : \text{typ. } 0,2 \text{ mA}$ )			17 lines

**CHARACTERISTICS** (continued)

Delay between the start of the sync at the video input and the rising edge of the burst key pulse	$t_2$	typ. 5,2 $\mu$ s 4,8 to 5,6 $\mu$ s
Delay between the start of the sync and the trailing edge of the burst key	$t_2$	typ. 8,8 $\mu$ s 8,1 to 9,3 $\mu$ s
<b>Coincidence detector; video transmitter identification circuit; time constant switches (pin 18); see also Fig. 2</b>		
Detector output current	$\pm I_{18}$	typ. 300 $\mu$ A
Voltage during noise (note 4)	$V_{18-9}$	typ. 0,3 V
Voltage level for in-sync condition	$V_{18-9}$	typ. 7,5 V
Switching level slow to fast	$V_{18-9}$	typ. 3,5 V 3,2 to 3,8 V
Switching level mute function active; $\varphi_1$ fast to slow	$V_{18-9}$	typ. 1,2 V 1,0 to 1,4 V
vertical period counter 3 periods fast	$V_{18-9}$	typ. 0,12 V 0,08 to 0,16 V
Switching level slow to fast (locking) mute function inactive	$V_{18-9}$	typ. 1,7 V 1,5 to 1,9 V
Switching level fast to slow (locking)	$V_{18-9}$	typ. 5,0 V 4,7 to 5,3 V
Switching level for VCR (fast time constant) without mute function	$V_{18-9}$	typ. 8,6 V 8,2 to 9,0 V
<b>Video transmitter identification output (pin 13)</b>		
Output voltage active (no sync) at $I_{13} = 1$ mA	$V_{13-9}$	> 10 V typ. 11 V
Output voltage active (no sync) at $I_{13} = 5$ mA	$V_{13-9}$	> 7 V typ. 10 V
Output voltage inactive	$V_{13-9}$	< 0,5 V typ. 0,1 V
<b>VCR switching (pin 13)</b>		
Input current for fast time constant phase detector $\varphi_1$ , with mute function active	$I_{13}$	typ. 0,6 mA 0,4 to 0,8 mA
<b>Flyback input pulse (pin 12)</b>		
Switching level	$V_{12-9}$	typ. 1 V
Input current	$I_{12}$	0,2 to 4 mA
Input pulse amplitude (peak-to-peak value)	$V_{12-9(p-p)}$	< 12 V
Input resistance	$R_{12-9}$	typ. 2,7 k $\Omega$
Delay time of sync pulse (measured in $\varphi_1$ ) to flyback at switching level; $t_{f1} = 12$ $\mu$ s (see also note 2 and Fig. 4)	$t_o$	typ. 1,3 $\mu$ s

**Duration of vertical blanking pulse (pin 12)**

Required input current (negative) for 50 Hz application; 21 lines blanking	$-I_{12}$	typ. > 0,15 to < 0,3	0,2 mA mA
for 60 Hz application; 17 lines blanking	$-I_{12}$	<	0,1 mA
Maximum allowed input current	$-I_{12}$	<	0,4 mA

**Vertical sawtooth generator (pin 3)**

Vertical frequency (no sync)	$f_s$	typ.	46 Hz
Frequency spread ( $C_{OSC} = 680 \text{ nF}$ ; $R_{OSC} = 187 \text{ k}\Omega$ ; at + 26 V)	$\Delta f_s$	<	4 %
Synchronization range		typ.	22 %
Input current at $V_{3.9} = 6 \text{ V}$	$I_3$	<	2 $\mu\text{A}$
Frequency shift for $V_P = 10 \text{ to } 13 \text{ V}$	$\Delta f_s$	<	0,2 %
Temperature coefficient	TC	typ.	$1 \cdot 10^{-4} \text{ K}^{-1}$

**Comparator (pin 2)**

Input voltage; d.c. level	$V_{2.9}$	typ. 4,0 to 4,8	4,4 V V
a.c. level (peak-to-peak value)	$V_{2.9(p-p)}$	typ.	1,5 V
Input current at $V_{2.9} = 6 \text{ V}$	$I_2$	<	2 $\mu\text{A}$
Sawtooth internal pre-correction (parabolic convex)		typ.	3 %

**Vertical output stage; emitter follower (pin 1)**

Output voltage at $I_1 = 10 \text{ mA}$	$V_{1.9}$	typ. 3,2 to 5	3,6 V V
Output current	$I_1$	<	20 mA

**Vertical guard circuit**

Activating voltage levels (vertical blanking level is 2,5 V)

switching level low	$V_{2.9}$	typ. 2,7 to 3,3	3 V V
switching level high	$V_{2.9}$	typ. 5,4 to 6,3	5,8 V V

**Notes to characteristics**

- Up to 1 V peak-to-peak the slicing level is constant; at amplitudes exceeding 1 V peak-to-peak the slicing level will increase.
- $t_d$  = delay between negative transient of horizontal output pulse and the rising edge of the flyback pulse.  
 $t_o$  = delay between the rising edge of the flyback pulse and the start of the current in  $\varphi_1$  (pin 8).
- The duration of the flyback pulse is measured at the input switching level, which is about 1 V ( $t_{fl}$ ).
- Depends on d.c. level at pin 5; value given applicable for  $V_{5.9} \approx 5 \text{ V}$ .

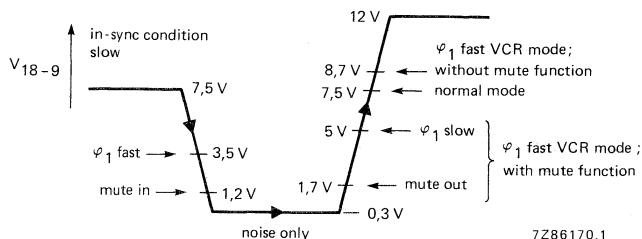


Fig. 3 Voltage levels at pin 18 ( $V_{18-g}$ ).

### APPLICATION INFORMATION

The TDA2577A generates the signal for driving the horizontal deflection output circuit. It also contains a synchronized vertical sawtooth generator for direct drive of the vertical deflection output stage.

The horizontal oscillator and output stage can start operating on a very low supply current ( $I_{16} \geq 4,5 \text{ mA}$ ), which can be taken directly from the mains rectifier. Therefore, it is possible to derive the main supply (pin 10) from the horizontal deflection output stage. The duty factor of the horizontal output signal is about 65% during the starting-up procedure. After starting-up, the second phase detector ( $\varphi_2$ ) is activated to control the timing of the negative-going edge of the horizontal output signal.

A bandgap reference voltage (6,5 V) is provided for supply and reference of the vertical oscillator and comparator stage.

The slicing level of the horizontal sync separator is independent of the amplitude of the sync pulse at the input. The resistor between pins 6 and 7 determines its value. A 4,7 k $\Omega$  resistor gives a slicing level at the middle of the sync pulse. The nominal top sync level at the input is 3,1 V. The amplitude selective noise inverter is activated at a level of 0,7 V.

Good stability is obtained by means of the two control loops. In the first loop, the phase of the horizontal sync signal is compared with a waveform of which the rising edge refers to the top of the horizontal oscillator signal. In the second loop, the phase of the flyback pulse is compared with another reference waveform, the timing of which is such that the top of the flyback pulse is situated symmetrically on the horizontal blanking interval of the video signal. Therefore the first loop can be designed for a good noise immunity, whereas the second loop can be as fast as desired for compensation of switch-off delays in the horizontal output stage.

The first phase detector is gated with a pulse derived from the horizontal oscillator signal. This gating (slow time constant) is switched off during catching. Also, the output current of the phase detector is increased fivefold, during the catching time and VCR conditions (fast time constant). The first phase detector is inhibited during the retrace time of the vertical oscillator.

The in-sync, out-of-sync or no video condition is detected by the video transmitter identification/coincidence detector circuit (pin 18). The voltage on pin 18 defines the time constant and gating of the first phase detector. The relationship between this voltage and the various switching levels is shown in Fig. 3. The complete survey of the switching actions is given in Table 1.

## APPLICATION INFORMATION (continued)

Table 1 Switching levels at pin 18.

voltage at pin 18	first phase detector $\varphi_1$				mute output at pin 13		receiving conditions
	time constant		gating		on	off	
	slow	fast	on	off			
7,5 V	X		X			X	video signal detected
7,5 to 3,5 V	X		X			X	video signal detected
3,5 to 1,2 V		X		X		X	video signal detected
1,2 to 0,1 V	X		X		X		noise only
0,1 to 1,7 V	X	*	X	*	X		new video signal detected
1,7 to 5,0 V		X		X		X	horizontal oscillator locked VCR playback with mute function
5,0 to 7,5 V	X		X			X	horizontal oscillator locked
8,7 V		X		X		X	VCR playback without mute function

Where: \* = 3 vertical periods.

The stability of displayed video information (e.g. channel number), during noise only conditions, is improved by the first phase detector time constant being set to slow.

The average voltage level of the video input on pin 5 during noise only conditions should not exceed 5,5 V otherwise the time constant switch may be set to fast due to the average voltage level on pin 18 dropping below 0,1 V. When the voltage on pin 18 drops below 100 mV a counter is activated which sets the time constant switch to fast, and not gated for 3 vertical periods. This condition occurs when a new video signal is present at pin 5. When the horizontal oscillator is locked the voltage on pin 18 increases. Nominally a level of 5 V is reached within 15 ms (1 vertical period). The mute switching level of 1,2 V is reached within 5 ms ( $C_{18} = 47 \text{ nF}$ ). If the video transmitter identification circuit is required to operate under VCR playback conditions the first phase detector can be set to fast by connecting a resistor of 180 k $\Omega$  between pin 18 and ground. Also a current of 0,6 mA into pin 13 sets the first phase detector to fast without affecting the mute output function (active HIGH with no video signal detected). For VCR playback without mute function, the first phase detector can be set to fast by connecting a resistor of 1 k $\Omega$  to the supply (pin 10).

The supply for the horizontal oscillator (pin 15) and horizontal output stage (pin 11) is derived from the voltage at pin 16 during the start condition. The horizontal output signal starts at a nominal supply current into pin 16 of 3,8 mA, which will result in a supply voltage of about 5,5 V (for guaranteed operation of all devices  $I_{16} > 4,5 \text{ mA}$ ). It is possible that the main supply voltage at pin 10 is 0 V during starting, so the main supply of the IC can be taken from the horizontal deflection output stage. The start of the other IC functions depends on the value of the main supply voltage at pin 10. At 5,5 V all IC functions start operating except the second phase detector (oscillator to flyback pulse). The output voltage of the second phase detector at pin 14 is clamped by means of an internally loaded n-p-n emitter follower. This ensures that the duty factor of the horizontal output signal (pin 11) remains at about 65%. The second phase detector will close if the supply voltage at pin 10 reaches 8,8 V. At this value the supply current for the horizontal oscillator and output stage is delivered by pin 10, which also causes the voltage at pin 16 to change to a stabilized 8,7 V. This change switches off the n-p-n emitter follower at pin 14 and activates the second phase detector. The supply voltage for the horizontal oscillator will, however, still be referred to the stabilized voltage at pin 16, and the duty factor of the output signal at pin 12 is at the value required by the delay at the horizontal deflection stage. Thus switch-off delays

in the horizontal output stage are compensated. When no horizontal flyback signal is detected the duty factor of the horizontal output signal is 50%.

Horizontal picture shift is possible by externally charging or discharging the 47 nF capacitor connected to pin 14.

The IC also contains a synchronized vertical oscillator/sawtooth generator. The oscillator signal is connected to the internal comparator (the other side of which is connected to pin 2), via an inverter and amplitude divider stage. The output of the comparator drives an emitter-follower output stage at pin 1. For a linear sawtooth in the oscillator, the load resistor at pin 3 should be connected to a voltage source of 26 V or higher. The sawtooth amplitude is not influenced by the main supply at pin 10. The feedback signal is applied to pin 2 and compared to the sawtooth signal at pin 3. For an economical feedback circuit with less picture bounce the sawtooth signal is internally precorrected by 3% (convex) referred to pin 2. The linearity of the vertical deflection current depends upon the oscillator signal at pin 3 and the feedback signal at pin 2.

Synchronization of the vertical oscillator is inhibited when the mute output is present at pin 13.

To minimize the influence of the horizontal part on the vertical part a 6,5 V bandgap reference source is provided for supply and reference of the vertical oscillator and comparator.

The sandcastle pulse, generated at pin 17, has three different voltage levels. The highest level (11 V) can be used for burst gating and black level clamping. The second level (4,6 V) is obtained from the horizontal flyback pulse at pin 12 and used for horizontal blanking. The third level (2,5 V) is used for vertical blanking and is derived by counting the horizontal frequency pulses. For 50 Hz the blanking pulse duration is 21 lines and for 60 Hz it is 17 lines. The blanking pulse duration is set by the negative voltage value of the horizontal flyback pulse at pin 12.

The IC also incorporates a vertical guard circuit, which monitors the vertical feedback signal at pin 2. If this level is below 3 V or higher than 5,8 V, the guard circuit will insert a continuous level of 2,5 V into the sandcastle output signal. This will result in complete blanking of the screen if the sandcastle pulse is used for blanking in the TV set.

## APPLICATION INFORMATION (continued)

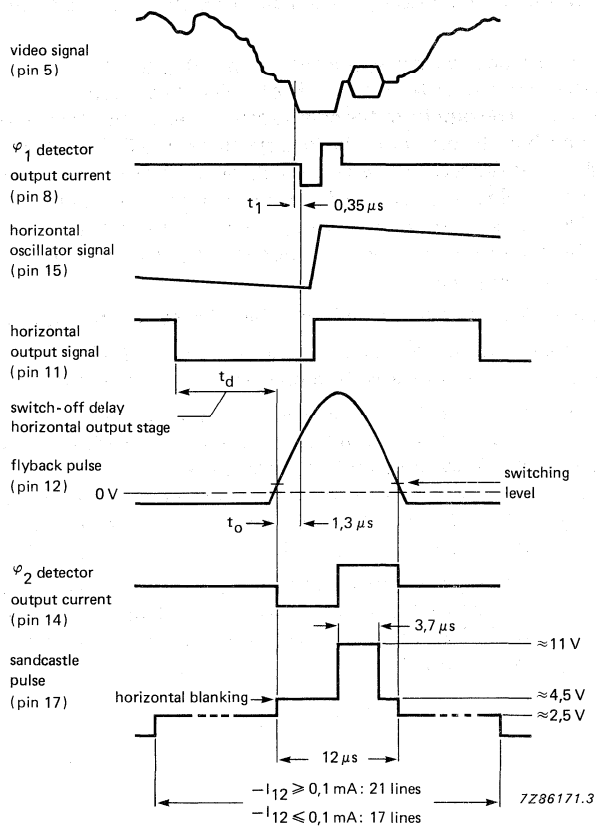


Fig. 4 Timing diagram of the TDA2577A.

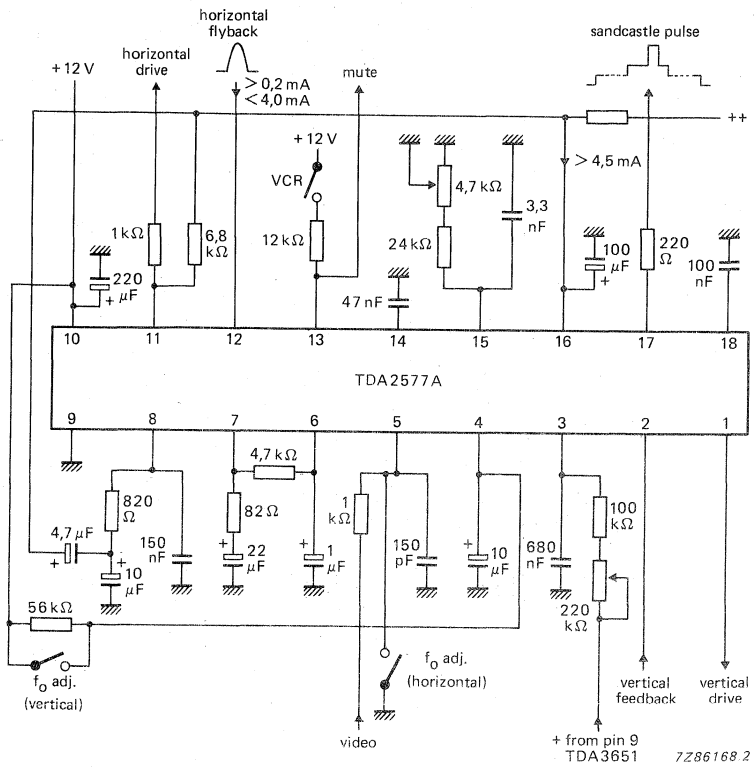


Fig. 5 Typical application circuit diagram; for combination of the TDA2577A with the TDA3651 see Fig. 7.




Fig. 6 Circuit configuration at pin 14 for phase adjustment.



## APPLICATION INFORMATION (continued)

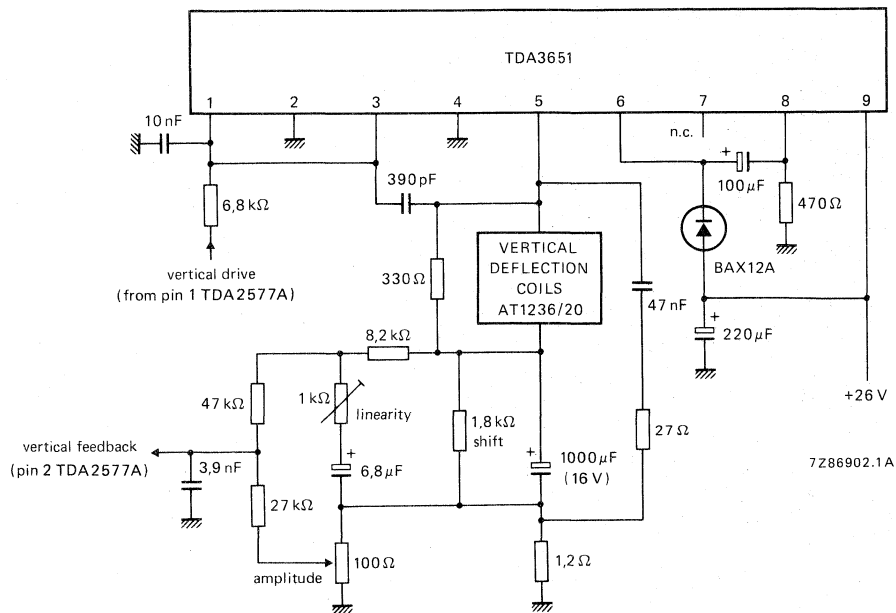


Fig. 7 Typical application circuit diagram of the TDA3651 (vertical output), when used in combination with the TDA2577A (90° application).



## SYNCHRONIZATION CIRCUIT WITH VERTICAL OSCILLATOR AND DRIVER STAGES

### GENERAL DESCRIPTION

The TDA2578A separates the vertical and horizontal sync pulses from the composite TV video signal and uses them to synchronize horizontal and vertical oscillators.

### Features

- Horizontal sync separator and noise inverter
- Horizontal oscillator
- Horizontal output stage
- Horizontal phase detector (sync to oscillator)
- Time constant switch for phase detector (fast time constant during catching)
- Slow time constant for noise only conditions
- Time constant externally switchable (e.g. fast for VCR)
- Inhibit of horizontal phase detector and video transmitter identification circuit during vertical oscillator flyback
- Second phase detector ( $\varphi_2$ ) for storage compensation of horizontal deflection stage
- Sandcastle pulse generator (3-levels)
- Video transmitter identification circuit
- Stabilizer and supply circuit for starting the horizontal oscillator and output stage directly from the mains rectifier
- Duty factor of horizontal output pulse is 50% when flyback pulse is absent
- Vertical sync separator
- Bandgap 6,5 V reference voltage for vertical oscillator and comparator
- Synchronized vertical oscillator/sawtooth generator (synchronization inhibited when no video transmitter is detected)
- Internal circuit for 6% parabolic pre-correction of the oscillator/sawtooth generator. Comparator supplied with pre-corrected sawtooth and external feedback input
- Vertical driver stage
- Vertical blanking pulse generator
- 50/60 Hz detector
- 50/60 Hz identification output
- Automatic amplitude adjustment for 60 Hz
- Automatic adjustment of blanking pulse duration (50 Hz: 21 lines; 60 Hz: 17 lines)
- Vertical guard circuit

### QUICK REFERENCE DATA

#### Supply

Minimum current required to start horizontal oscillator and output stage (pin 16)

$I_{16} > 4,5 \text{ mA}$

Main supply voltage (pin 10)

$V_P = V_{10-9} \text{ typ. } 12 \text{ V}$

Supply current

$I_P = I_{10} \text{ typ. } 55 \text{ mA}$

#### Input signals

Sync pulse input voltage (peak-to-peak value; negative-going)

$V_{5-9(p-p)} \quad 0,15 \text{ to } 1 \text{ V}$

#### Output signals

Horizontal output pulse (open collector) at  $I_{11} = 40 \text{ mA}$

$V_{11-9} < 0,5 \text{ V}$

Vertical output pulse (emitter-follower) at  $I_1 = 10 \text{ mA}$

$V_{1-9} > 4 \text{ V}$

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

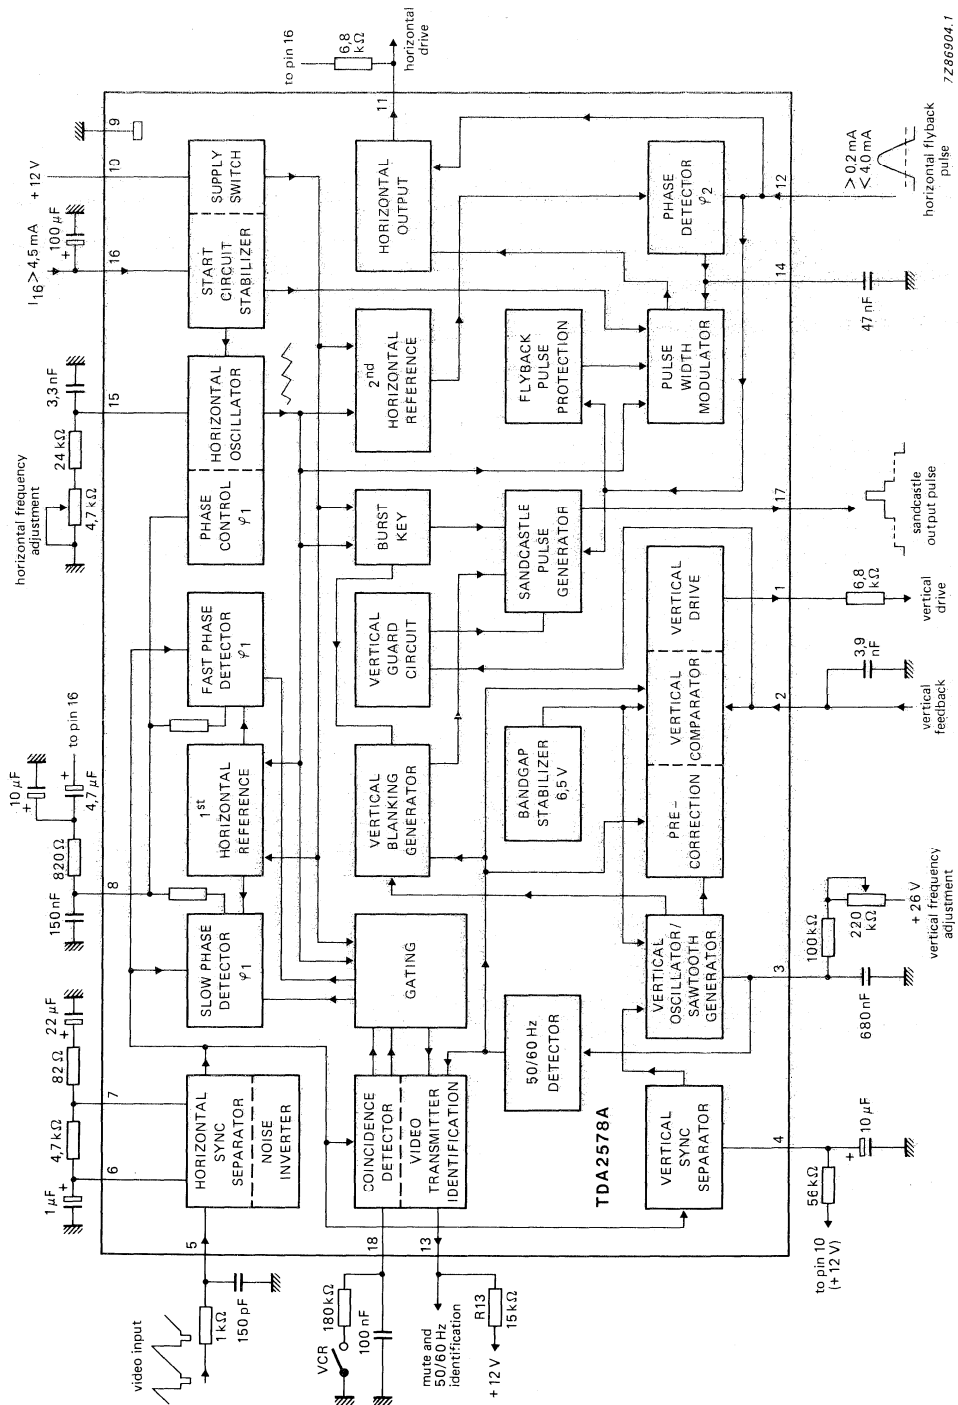


Fig. 1 Block diagram.

7286904.1

Synchronization circuit  
with vertical oscillator and driver stages

TDA2578A

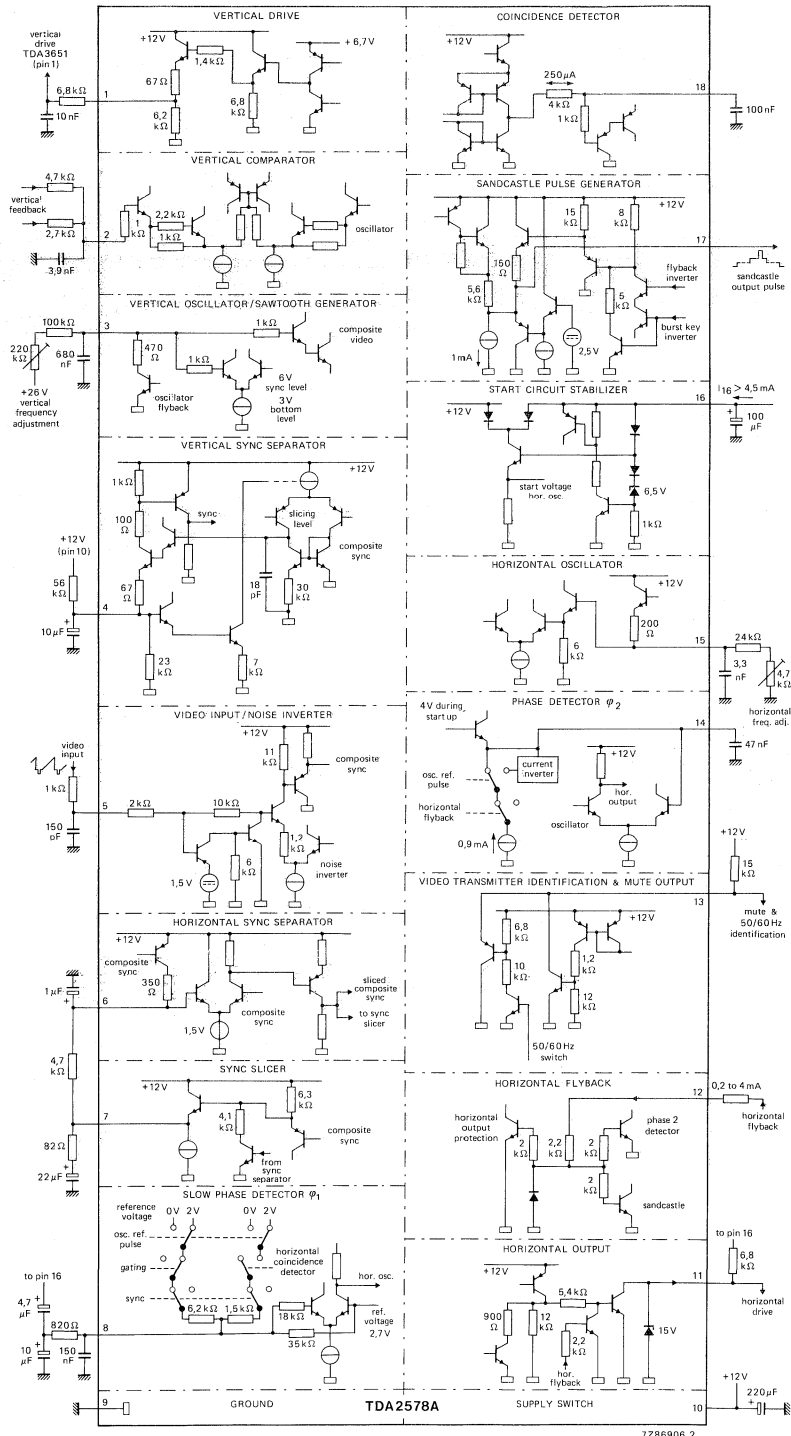


Fig. 2 TDA2578A circuit diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Start current (pin 16)	$I_{16}$	max.	8 mA
Supply voltage (pin 10)	$V_P = V_{10-9}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,1 W
Storage temperature range	$T_{stg}$		-55 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-25 to + 65 °C

**THERMAL RESISTANCE**

From junction to ambient in free air	$R_{th\ j-a}$	typ.	50 K/W
--------------------------------------	---------------	------	--------

**CHARACTERISTICS** $I_{16} = 5\text{ mA}$ ;  $V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified**Supply**

Supply current at pin 16	$I_{16}$		4,5 to 8 mA
Stabilized supply voltage (pin 16)	$V_{16-9}$	typ.	8,7 V 8,0 to 9,5 V
Supply current (pin 10)	$I_{10}$	typ. <	55 mA 70 mA
Supply voltage (pin 10)	$V_P = V_{10-9}$	typ.	12 V 10 to 13,2 V

**Video input (pin 5)**

Top-sync level	$V_{5-9}$	typ.	3,1 V 1,5 to 3,75 V
Sync pulse amplitude (peak-to-peak value) (note 1)	$V_{5-9(p-p)}$	typ.	0,6 V 0,15 to 1 V
Slicing level		typ.	50 % 35 to 65 %
Delay between video input and detector output	$t_1$	typ.	0,35 $\mu$ s

**Noise gate (pin 5)**

Switching level	$V_{5-9}$	typ. <	0,7 V 1 V
-----------------	-----------	-----------	--------------

**First control loop (sync to oscillator; pin 8)**

Holding range	$\Delta f$	typ.	$\pm 800\text{ Hz}$
Catching range	$\Delta f$	typ.	$\pm 800\text{ Hz}$ $\pm 600\text{ to } \pm 1100\text{ Hz}$

Control sensitivity video with respect to oscillator, burst key and flyback pulse

for slow time constant		typ.	1 kHz/ $\mu$ s
for fast time constant		typ.	2,75 kHz/ $\mu$ s

**Second control loop** (horizontal output to flyback; pin 14)

Control sensitivity; static (see note 2)	$\Delta t_d / \Delta t_o$	typ.	400 $\mu s / \mu s$
Control range	$t_d$		1 to 45 $\mu s$
Controlled edge	positive		

**Phase adjustment** (via 2nd control loop; pin 14)

Control sensitivity		typ.	25 $\mu A / \mu s$
Maximum permissible control current	$\pm I_{14}$	<	60 $\mu A$

**Horizontal oscillator** (pin 15)

Frequency (no sync)	$f_{osc}$	typ.	15 625 Hz
Frequency spread ( $C_{osc} = 3,3 \text{ nF}$ ; $R_{osc} = 24 \text{ k}\Omega$ ; no sync)	$\Delta f_{osc}$	<	4 %
Frequency deviation between starting point of output signal and stabilized condition	$\Delta f_{osc}$	typ. <	6 % 8 %
Temperature coefficient	TC	typ.	$1 \cdot 10^{-4} \text{ K}^{-1}$

**Horizontal output** (pin 11)

Output voltage; high level	$V_{11-9}$	<	13,2 V
Voltage at which protection starts	$V_{11-9}$		13 to 15,8 V
Output voltage; low level start condition at $I_{11} = 10 \text{ mA}$	$V_{11-9}$	typ. <	0,3 V 0,5 V
normal condition at $I_{11} = 40 \text{ mA}$	$V_{11-9}$	typ. <	0,3 V 0,5 V
Duty factor of output signal during starting (no phase shift) $I_{16} = 4 \text{ mA}$ (voltage at pin 11 low)	$\delta$	typ.	65 %
Duty factor of output signal without flyback pulse	$\delta$	typ.	50 % 45 to 55 %
Controlled edge	positive		
Duration of output pulse (see Fig. 4)	$t_d$ + horizontal flyback pulse		

**Sandcastle output pulse** (pin 17)

Output voltage during: burst key	$V_{17-9}$	>	10 V
horizontal blanking	$V_{17-9}$	typ.	4,6 V 4,2 to 5 V
vertical blanking	$V_{17-9}$	typ.	2,5 V 2 to 3 V
Pulse duration burst key	$t_p$	typ.	3,7 $\mu s$ 3,3 to 4,1 $\mu s$
horizontal blanking			flyback pulse (see note 3)
vertical blanking at 50 Hz	21 lines		
at 60 Hz	17 lines		

## CHARACTERISTICS (continued)

Delay between the start of the sync at the video input and the rising edge of the burst key pulse	$t_2$	typ. 5,2 $\mu$ s 4,8 to 5,6 $\mu$ s
Delay between start of sync and trailing edge of burst key	$t_2$	typ. 8,8 $\mu$ s 8,1 to 9,3 $\mu$ s
<b>Coincidence detector; video transmitter identification circuit; time constant switches (pin 18); see also Fig. 3</b>		
Detector output current	$\pm I_{18}$	typ. 300 $\mu$ A
Voltage during noise (note 4)	$V_{18-9}$	typ. 0,3 V
Voltage level for in-sync condition	$V_{18-9}$	typ. 7,5 V
Switching level slow to fast	$V_{18-9}$	typ. 3,5 V 3,2 to 3,8 V
Switching level mute function active; $\varphi_1$ fast to slow	$V_{18-9}$	typ. 1,2 V 1,0 to 1,4 V
vertical period counter 3 periods fast	$V_{18-9}$	typ. 0,12 V 0,08 to 0,16 V
Switching level slow to fast (locking) mute function inactive	$V_{18-9}$	typ. 1,7 V 1,5 to 1,9 V
Switching level fast to slow (locking)	$V_{18-9}$	typ. 5,0 V 4,7 to 5,3 V
Switching level for VCR (fast time constant) without mute function	$V_{18-9}$	typ. 8,6 V 8,2 to 9,0 V
<b>Video transmitter identification output (pin 13)</b>		
Output voltage active (no sync) at $I_{13} = 1$ mA	$V_{13-9}$	< 0,5 V typ. 0,3 V
Sink current active (no sync)	$I_{13}$	$\leq$ 5 mA
Output current inactive (sync: 50 Hz)	$I_{13}$	< 1 $\mu$ A
<b>50/60 Hz identification (pin 13)</b>		
$R_{13} = 15$ k $\Omega$ to + 12 V (note 5) at $f = 50$ Hz (in sync condition)	$V_{13-9}$	typ. $V_{10-9}$ V
at $f = 60$ Hz (in sync condition)	$V_{13-9}$	typ. 7,6 V 7,2 to 8 V
<b>Flyback input pulse (pin 12)</b>		
Switching level	$V_{12-9}$	typ. 1 V
Input current	$I_{12}$	0,2 to 4 mA
Input pulse amplitude (peak-to-peak value)	$V_{12-9(p-p)}$	< 12 V
Input resistance	$R_{12-9}$	typ. 2,7 k $\Omega$
Delay time of sync pulse (measured in $\varphi_1$ ) to flyback at switching level; $t_{f1} = 12$ $\mu$ s (see also note 2 and Fig. 4)	$t_o$	typ. 1,3 $\mu$ s



**Vertical sawtooth generator (pin 3)**

Vertical frequency (no sync)	$f_s$	typ.	46 Hz
Frequency spread ( $C_{OSC} = 680 \text{ nF}$ ; $R_{OSC} = 187 \text{ k}\Omega$ ; at +26 V)	$\Delta f_s$	<	4 %
Synchronization range (note 6)		typ.	33 %
Input current at $V_{3-g} = 6 \text{ V}$	$I_3$	<	$3 \mu\text{A}$
Frequency shift for $V_p = 10$ to $13 \text{ V}$	$\Delta f_s$	<	0,2 %
Temperature coefficient	TC	typ.	$1 \cdot 10^{-4} \text{ K}^{-1}$

**Comparator (pin 2)**

Input voltage; d.c. level	$V_{2-g}$	typ.	4,4 V 4,0 to 4,8 V
a.c. level (peak-to-peak value)	$V_{2-g(p-p)}$	typ.	0,8 V
Input current at $V_{2-g} = 6 \text{ V}$	$I_2$	<	$2 \mu\text{A}$
Sawtooth internal pre-correction (parabolic convex)		typ.	6 %

**Vertical output stage; emitter follower (pin 1)**

Output voltage at $I_1 = 10 \text{ mA}$	$V_{1-g}$	typ.	3,6 V 3,2 to 5 V
Output current	$I_1$	<	20 mA

**Vertical guard circuit**

Activating voltage levels (vertical blanking level is 2,5 V) switching level low	$V_{2-g}$	typ.	3,35 V 3,0 to 3,7 V
switching level high	$V_{2-g}$	typ.	5,15 V 4,75 to 5,55 V

**Notes to characteristics**

- Up to 1 V peak-to-peak the slicing level is constant; at amplitudes exceeding 1 V peak-to-peak the slicing level will increase.
- $t_d$  = delay between positive transient of horizontal output pulse and the rising edge of the flyback pulse.  
 $t_o$  = delay between the rising edge of the flyback pulse and the start of the current in  $\varphi_1$  (pin 8).
- The duration of the flyback pulse is measured at the input switching level, which is about 1 V ( $t_{ff}$ ).
- Depends on d.c. level at pin 5; value given applicable for  $V_{5-g} \approx 5 \text{ V}$ .
- For 60 Hz a p-n-p emitter clamp is activated.
- When  $f_o = 46 \text{ Hz}$  the 50/60 Hz detector switches over to 60 Hz; video input signal at pin 5  $\approx 55 \text{ Hz}$ .

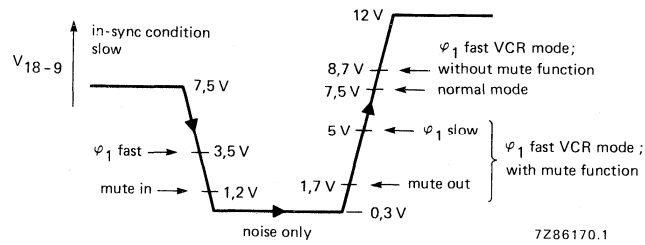


Fig. 3 Voltage levels at pin 18 (V18-9).

### APPLICATION INFORMATION

The TDA2578A generates the signal for driving the horizontal deflection output circuit. It also contains a synchronized vertical sawtooth generator for direct drive of the vertical deflection output stage.

The horizontal oscillator and output stage can start operating on a very low supply current ( $I_{16} \geq 4,5 \text{ mA}$ ), which can be taken directly from the mains rectifier. Therefore, it is possible to derive the main supply (pin 10) from the horizontal deflection output stage. The duty factor of the horizontal output signal is about 65% during the starting-up procedure. After starting-up, the second phase detector ( $\varphi_2$ ) is activated to control the timing of the positive-going edge of the horizontal output signal.

A bandgap reference voltage (6,5 V) is provided for supply and reference of the vertical oscillator and comparator stage.

The slicing level of the horizontal sync separator is independent of the amplitude of the sync pulse at the input. The resistor between pins 6 and 7 determines its value. A 4,7 k $\Omega$  resistor gives a slicing level at the middle of the sync pulse. The nominal top sync level at the input is 3,1 V. The amplitude selective noise inverter is activated at a level of 0,7 V.

Good stability is obtained by means of the two control loops. In the first loop, the phase of the horizontal sync signal is compared with a waveform of which the rising edge refers to the top of the horizontal oscillator signal. In the second loop, the phase of the flyback pulse is compared with another reference waveform, the timing of which is such that the top of the flyback pulse is situated symmetrically on the horizontal blanking interval of the video signal. Therefore the first loop can be designed for a good noise immunity, whereas the second loop can be as fast as desired for compensation of switch-off delays in the horizontal output stage.

The first phase detector is gated with a pulse derived from the horizontal oscillator signal. This gating (slow time constant) is switched off during catching. Also, the output current of the phase detector is increased fivefold, during the catching time and VCR conditions (fast time constant). The first phase detector is inhibited during the retrace time of the vertical oscillator.

The in-sync, out-of-sync or no video condition is detected by the video transmitter identification/coincidence detector circuit (pin 18). The voltage on pin 18 defines the time constant and gating of the first phase detector. The relationship between this voltage and the various switching levels is shown in Fig. 3. The complete survey of the switching actions is given in Table 1.

**Table 1** Switching levels at pin 18.

voltage at pin 18	first phase detector $\varphi_1$				mute output at pin 13		receiving conditions
	time constant		gating		on	off	
	slow	fast	on	off			
7,5 V	X		X			X	video signal detected
7,5 to 3,5 V	X		X			X	video signal detected
3,5 to 1,2 V		X		X		X	video signal detected
1,2 to 0,1 V	X		X		X		noise only
0,1 to 1,7 V	X	*	X	*	X		new video signal detected
1,7 to 5,0 V		X		X		X	horizontal oscillator locked VCR playback with mute function
5,0 to 7,5 V	X		X			X	horizontal oscillator locked
8,7 V		X		X		X	VCR playback without mute function

Where: \* = 3 vertical periods.

**APPLICATION INFORMATION** (continued)

The stability of displayed video information (e.g. channel number), during noise only conditions, is improved by the first phase detector time constant being set to slow.

The average voltage level of the video input on pin 5 during noise only conditions should not exceed 5,5 V otherwise the time constant switch may be set to fast due to the average voltage level on pin 18 dropping below 0,1 V. When the voltage on pin 18 drops below 100 mV a counter is activated which sets the time constant switch to fast, and not gated for 3 vertical periods. This condition occurs when a new video signal is present at pin 5. When the horizontal oscillator is locked the voltage on pin 18 increases. Nominally a level of 5 V is reached within 15 ms (1 vertical period). The mute switching level of 1,2 V is reached within 5 ms ( $C_{18} = 47 \text{ nF}$ ). If the video transmitter identification circuit is required to operate under VCR playback conditions the first phase detector can be set to fast by connecting a resistor of 180 k $\Omega$  between pin 18 and ground (see Fig. 7).

The supply for the horizontal oscillator (pin 15) and horizontal output stage (pin 11) is derived from the voltage at pin 16 during the start condition. The horizontal output signal starts at a nominal supply current into pin 16 of 4,2 mA, which will result in a supply voltage of about 5,5 V (for guaranteed operation of all devices  $I_{16} > 4,5 \text{ mA}$ ). It is possible that the main supply voltage at pin 10 is 0 V during starting, so the main supply of the IC can be taken from the horizontal deflection output stage. The start of the other IC functions depends on the value of the main supply voltage at pin 10. At 5,5 V all IC functions start operating except the second phase detector (oscillator to flyback pulse). The output voltage of the second phase detector at pin 14 is clamped by means of an internally loaded n-p-n emitter follower. This ensures that the duty factor of the horizontal output signal (pin 11) remains at about 65%. The second phase detector will close if the supply voltage at pin 10 reaches 8,8 V. At this value the supply current for the horizontal oscillator and output stage is delivered by pin 10, which also causes the voltage at pin 16 to change to a stabilized 8,7 V. This change switches off the n-p-n emitter follower at pin 14 and activates the second phase detector. The supply voltage for the horizontal oscillator will, however, still be referred to the stabilized voltage at pin 16, and the duty factor of the output signal at pin 12 is at the value required by the delay at the horizontal deflection stage. Thus switch-off delays in the horizontal output stage are compensated. When no horizontal flyback signal is detected the duty factor of the horizontal output signal is 50%.

Horizontal picture shift is possible by externally charging or discharging the 47 nF capacitor connected to pin 14.

The IC also contains a synchronized vertical oscillator/sawtooth generator. The oscillator signal is connected to the internal comparator (the other side of which is connected to pin 2), via an inverter and amplitude divider stage. The output of the comparator drives an emitter-follower output stage at pin 1. For a linear sawtooth in the oscillator, the load resistor at pin 3 should be connected to a voltage source of 26 V or higher. The sawtooth amplitude is not influenced by the main supply at pin 10. The feedback signal is applied to pin 2 and compared to the sawtooth signal at pin 3. For an economical feedback circuit with less picture bounce the sawtooth signal is internally pre-corrected by 6% (convex) referred to pin 2. The linearity of the vertical deflection current depends upon the oscillator signal at pin 3 and the feedback signal at pin 2.

Synchronization of the vertical oscillator is inhibited when the mute output is present at pin 13.

To minimize the influence of the horizontal part on the vertical part a 6,7 V bandgap reference source is provided for supply and reference of the vertical oscillator and comparator.

The sandcastle pulse, generated at pin 17, has three different voltage levels. The highest level (11 V) can be used for burst gating and black level clamping. The second level (4,6 V) is obtained from the horizontal flyback pulse at pin 12 and used for horizontal blanking. The third level (2,5 V) is used for vertical blanking and is derived by counting the horizontal frequency pulses. For 50 Hz the blanking pulse duration is 21 lines and for 60 Hz it is 17 lines. The blanking pulse duration and sawtooth amplitude is automatically adjusted via the 50/60 Hz detector.

The IC also incorporates a vertical guard circuit, which monitors the vertical feedback signal at pin 2. If this level is below 3,35 V or higher than 5,15 V, the guard circuit will insert a continuous level of 2,5 V into the sandcastle output signal. This will result in complete blanking of the screen if the sandcastle pulse is used for blanking in the TV set.


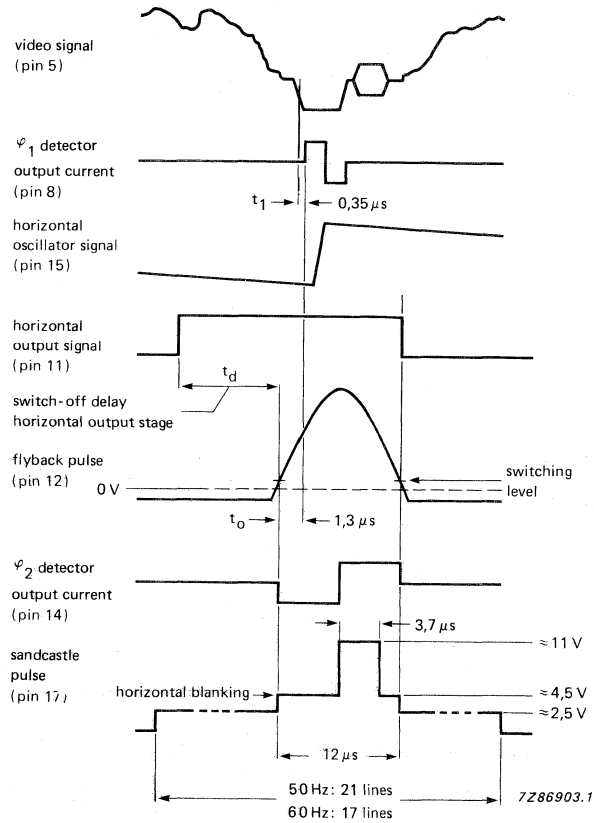


Fig. 4 Timing diagram of the TDA2578A.

APPLICATION INFORMATION (continued)

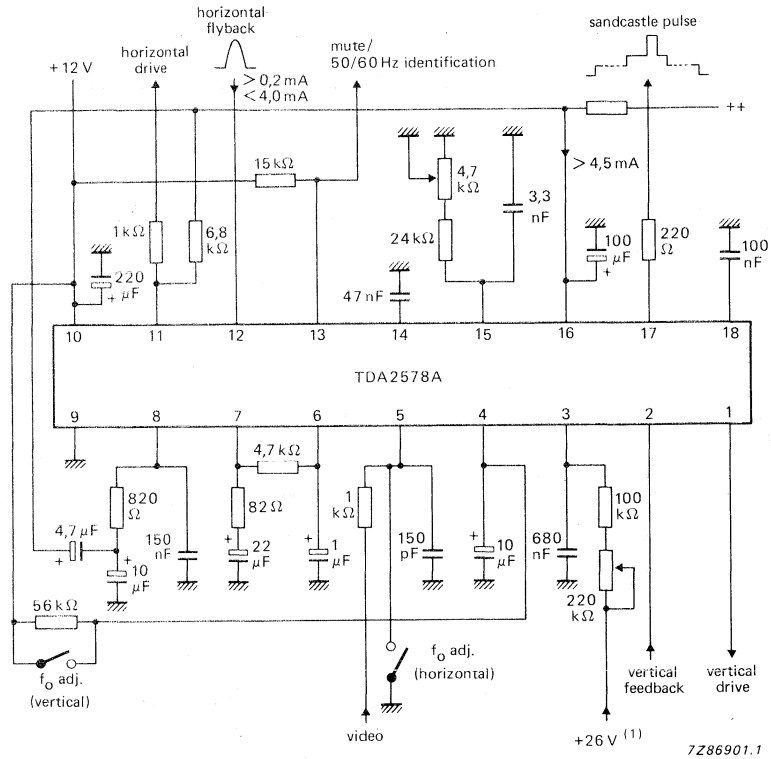

(1)  $\geq 26$  V for linear scan.

Fig. 5 Typical application circuit diagram; for application of the TDA2578A with the TDA3651 see Fig. 8.




Fig. 6 Circuit configuration at pin 14 for phase adjustment.

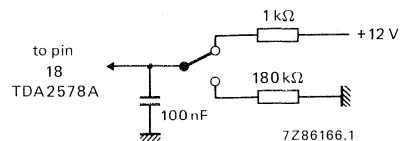


Fig. 7 Circuit configuration at pin 18 for VCR mode.

1 kΩ resistor between pin 18 and +12 V:  
without mute function.  
180 kΩ between pin 18 and ground:  
with mute function.

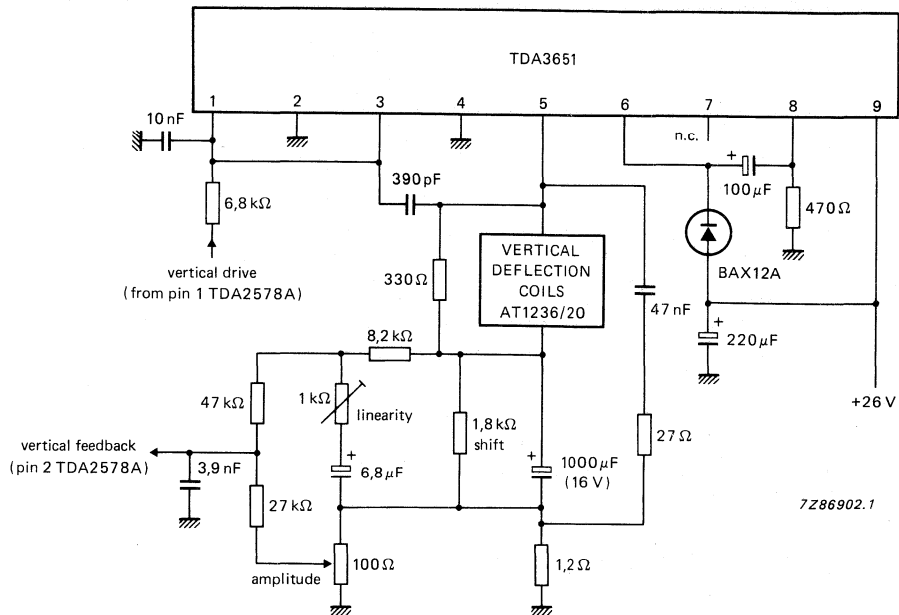


Fig. 8 Typical application circuit diagram of the TDA3651 (vertical output), when used in combination with the TDA2578A, (90° application).





# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA2579A

## HORIZONTAL/VERTICAL SYNCHRONIZATION CIRCUIT

### GENERAL DESCRIPTION

The TDA2579A generates and synchronizes horizontal and vertical signals. The device has a 3 level sandcastle output; a transmitter identification signal and also 50/60 Hz identification.

### Features

- Horizontal phase detector, (sync to oscillator), sync separator and noise inverter
- Triple current source in the phase detector with automatic selection
- Second phase detector for storage compensation of the horizontal output
- Stabilized direct starting of the horizontal oscillator and output stage from mains supply
- Horizontal output pulse with constant duty cycle value of 29  $\mu$ s
- Internal vertical sync separator, and two integration selection times
- Divider system with three different reset enable windows
- Synchronization is set to 628 divider ratio when no vertical sync pulses and no video transmitter is identified
- Vertical comparator with a low DC feedback signal
- 50/60 Hz identification output combined with mute function
- Automatic amplitude adjustment for 50 and 60 Hz and blanking pulse duration
- Automatic adaption of the burst-key pulsewidth

### QUICK REFERENCE DATA

parameter	condition	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Minimum required current for starting horizontal oscillator and output stage		I <sub>16</sub>	6.2	—	—	mA
Main supply voltage		V <sub>10</sub>	—	12	—	V
Supply current		I <sub>10</sub>	—	70	—	mA
<b>Input signals</b>						
Sync pulse input amplitude		V <sub>5(p-p)</sub>	0.05	—	1.0	V
Horizontal flyback pulse input current		I <sub>12</sub>	—	1	—	mA
Vertical comparator input signal		V <sub>2</sub>	—	0.8	—	V
Voltage AC		V <sub>2</sub>	—	1	—	V
<b>Output signals</b>						
Horizontal output (open collector) I <sub>11</sub> = 25 mA		V <sub>11</sub>	—	—	0.5	V
Vertical output stage driver (emitter follower) I <sub>1</sub> = 1.5 mA		V <sub>1</sub>	5	—	—	V
Sandcastle output levels		V <sub>17</sub>	9.8	—	—	V
V <sub>17</sub> burst-key		V <sub>17</sub>	—	4.5	—	V
horizontal blanking		V <sub>17</sub>	—	2.5	—	V
vertical blanking		V <sub>17</sub>	—	—	—	V
Video transmitter identification output stage (open collector loaded with external resistor to positive supply). No sync. pulse present		V <sub>13</sub>	—	—	0.5	V
		I <sub>13</sub>	—	—	5	mA
Sync pulse present		V <sub>13</sub>	—	V <sub>10</sub>	—	V
divider ratio > 576		V <sub>13</sub>	—	7.65	—	V
divider ratio < 576		V <sub>13</sub>	—	—	—	V

### PACKAGE OUTLINE

18-lead dual in line; plastic (SOT-102H).

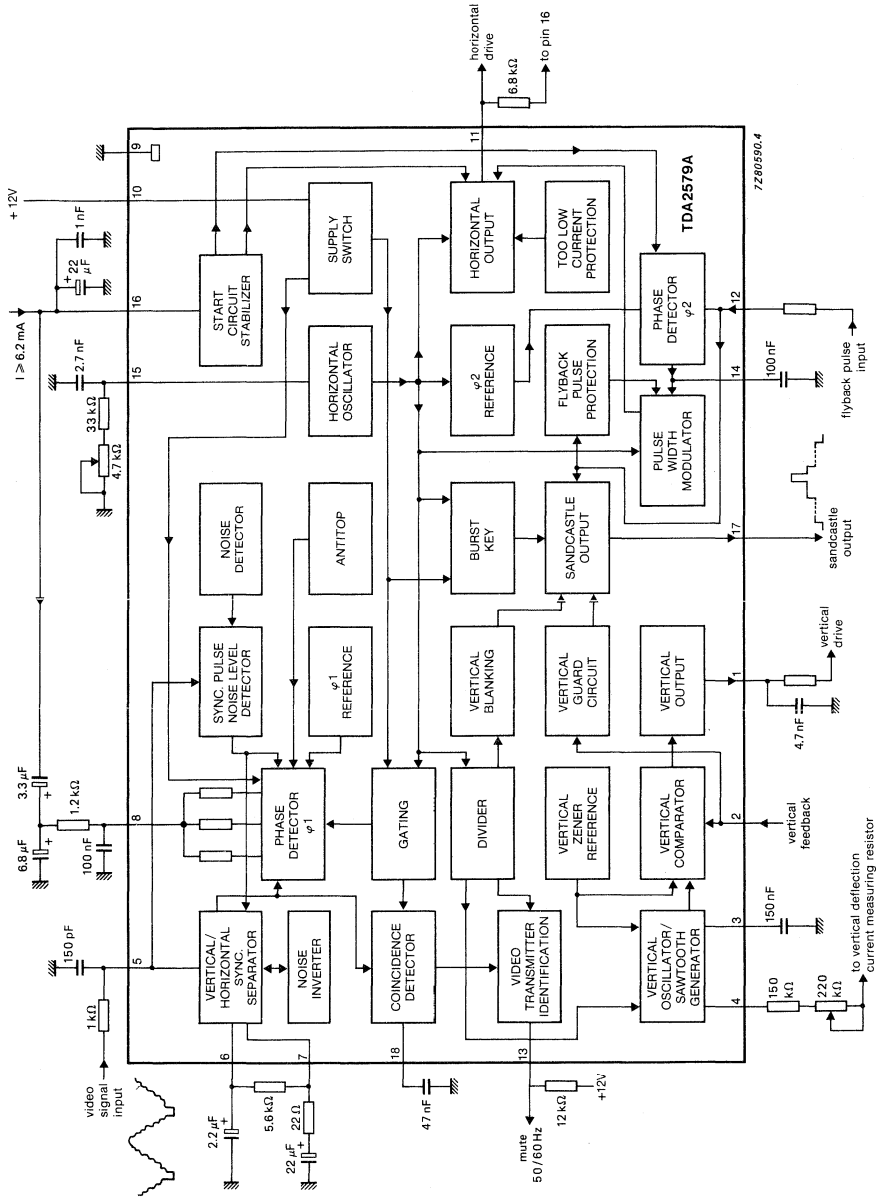


Fig. 1 Block diagram.

## FUNCTIONAL DESCRIPTION

### Vertical part (pins 1,2,3,4)

The IC embodies a synchronized divider system for generating the vertical sawtooth at pin 3. The divider system has an internal frequency doubling circuit, so the horizontal oscillator is working at its normal line frequency and one line period equals 2 clock pulses. Due to the divider system no vertical frequency adjustment is needed. The divider has a discriminator window for automatically switching over from the 60 Hz to 50 Hz system. The divider system operates with 3 different divider reset windows for maximum interference/disturbance protection.

The windows are activated via an up/down counter. The counter increases its counter value by 1 for each time the separated vertical sync pulse is within the searched window. The count is decreased by 1 when the vertical sync pulse is not present.

### Large (search) window: divider ratio between 488 and 722

This mode is valid for the following conditions:

1. Divider is looking for a new transmitter.
2. Divider ratio found, not within the narrow window limits.
3. Non standard TV-signal condition detected while a double or enlarged vertical sync. pulse is still found after the internally generated anti-top-flutter pulse has ended. This means a vertical sync pulse width larger than 8 clock pulses (50 Hz), that is, 10 clock pulses (60 Hz). In general this mode is activated for video tape recorders operating in the feature/trick mode.
4. Up/down counter value of the divider system operating in the narrow window mode decreases below count 1.
5. Externally setting. This can be reached by loading pin 18 with a resistor of 220 k $\Omega$  to earth or connecting a 3.6 V diode stabistor between pin 18 and ground.

### Narrow window: divider ratio between 522-528 (60 Hz) or 622-628 (50 Hz).

The divider system switches over to this mode when the up/down counter has reached its maximum value of 12 approved vertical sync pulses. When the divider operates in this mode and a vertical sync pulse is missing within the window the divider is reset at the end of the window and the counter value is decreased by 1. At a counter value below count 1 the divider system switches over to the large window mode.

### Standard TV-norm

When the up/down counter has reached its maximum value of 12 in the narrow window mode, the information applied to the up/down counter is changed such that the standard divider ratio value is tested. When the counter has reached a value of 14 the divider system is changed over to the standard divider ratio mode. In this mode the divider is always reset at the standard value even if the vertical sync pulse is missing. A missed vertical sync pulse decreases the counter value by 1. When the counter reaches the value of 10 the divider system is switched over to the large window mode. The standard TV-norm condition gives maximum protection for video recorders playing tapes with anti-copy guards.

### No-TV-transmitter found: (pin 18 < 1.2 V)

In this condition, only noise is present, the divider is reset to count 628. In this way a stable picture display at normal height is achieved.

DEVELOPMENT DATA

### Video tape recorders in feature mode

It should be noted that some VTRs operating in the feature modes, such as picture search, generate such distorted pictures that the no-TV-transmitter detection circuit can be activated as pin V<sub>1g</sub> drops below 1.2 V. This would imply a rolling picture (see Phase detector, sub paragraph d). In general VTR-machines use a re-inserted vertical sync pulse in the feature mode. Therefore the divider system has been made such that the automatic reset of the divider at count 628 when V<sub>1g</sub> is below 1.2 V is inhibited when a vertical sync pulse is detected.

The divider system also generates the anti-top-flutter pulse which inhibits the Phase 1 detector during the vertical sync. pulse. The width of this pulse depends on the divider mode. For the divider mode a the start is generated at the reset of the divider. In mode b and c the anti-top-flutter pulse starts at the beginning of the first equalizing pulse. The anti-top-flutter pulse ends at count 8 for 50 Hz and count 10 for 60 Hz. The vertical blanking pulse is also generated via the divider system. The start is at the reset of the divider while the blanking pulse ends at count 34 (17 lines) for 60 Hz, and at count 42 (21 lines) for 50 Hz systems. The vertical blanking pulse generated at the sandcastle output pin 17 is made by adding the anti-top-flutter pulse and the blanking pulse. In this way the vertical blanking pulse starts at the beginning of the first equalizing pulse when the divider operates in the b or c mode. For generating a vertical linear sawtooth voltage a capacitor should be connected to pin 3. The recommended value is 150 nF to 330 nF (see Fig. 1).

The capacitor is charged via an internal current source starting at the reset of the divider system. The voltage on the capacitor is monitored by a comparator which is activated also at reset. When the capacitor has reached a voltage value of 5.85 V for the 50 Hz system or 5.0 V for the 60 Hz system the voltage is kept constant until the charging period ends. The charge period width is 26 clock pulses. At clock pulse 26 the comparator is switched off and the capacitor is discharged by an npn transistor current source, the value of which can be set by an external resistor between pin 4 and ground (pin 9). Pin 4 is connected to a pnp transistor current source which determines the current of the npn current source at pin 3. The pnp current source on pin 4 is connected to an internal zener diode reference voltage which has a typical voltage of  $\approx 7.7$  volts. The recommended operating current range is 10 to 75  $\mu$ A. The resistance at pin R<sub>4</sub> should be 100 to 770 k $\Omega$ . By using a double current mirror concept the vertical sawtooth pre-correction can be set on the desired value by means of external components between pin 4 and pin 3, or by connecting the pin 4 resistor to the vertical current measuring resistor of the vertical output stage. The vertical amplitude is set by the current of pin 4. The vertical feedback voltage of the output stage has to be applied to pin 2. For the normal amplitude adjustment the values are DC = 1 V and AC = 0.8 V. Due to the automatic system adaption both values are valid for 50 Hz and 60 Hz.

The low DC voltage value improves the picture bounce behaviour as less parabola compensation is necessary. Even a fully DC coupled feedback circuit is possible.

### Vertical guard

The IC also contains a vertical guard circuit. This circuit monitors the vertical feedback signal on pin 2. When the level on pin 2 is below 0.35 V or higher than 1.85 V the guard circuit inserts a continuous level of 2.5 V in the sandcastle output signal of pin 17. This results in the blanking of the picture displayed, thus preventing a burnt-in horizontal line. The guard levels specified refer to the zener diode reference voltage source level.

### Driver output

The driver output is at pin 1, it can deliver a drive current of 1.5 mA at 5 V output. The internal impedance is approximately 150  $\Omega$ . The output pin is also connected to an internal current source with a sink current of 0.35 mA.

**Sync separator, phase detector and TV-station identification** (pins 5,6,7,8 and 18)

The video input signal is connected to pin 5. The sync separator is designed such that the slicing level is independent of the amplitude of the sync pulse. The black level is measured and stored in the capacitor at pin 7. The slicing level value is stored in the capacitor at pin 6. The slicing level value can be chosen by the value of the external resistor between pins 6 and 7. The value is given by the formula:

$$P = \frac{R_s}{5.3 + R_s} \times 100 \quad (R_s \text{ value in } k\Omega)$$

Where  $R_s$  is the resistor between pins 6 and 7 and top sync level equals 100%. The recommended resistor value is 5.6  $k\Omega$ .

**Black level detector**

A gating signal is used for the black level detector. This signal is composed of an internal horizontal reference pulse with a duty factor of 50% and the flyback pulse at pin 12. In this way the TV-transmitter identification operates also for all DC conditions at input pin 5 (no video modulation, plain carrier only).

During the frame interval the slicing level detector is inhibited by a signal which starts with the anti-top flutter pulse and ends with the reset vertical divider circuit. In this way shift of the slicing level due to the vertical sync signal is reduced and separation of the vertical sync pulse is improved.

**Noise inverter**

An internal noise inverter is activated when the video level at pin 5 decreases below 0.7 V. The IC also embodies a built-in sync pulse noise level detection circuit. This circuit is directly connected to pin 5 and measures the noise level at the middle of the horizontal sync pulse. When a signal-to-noise level of 19 dB is detected a counter circuit is activated. A video input signal is processed as "acceptable noise free" when 12 out of 16 sync pulses have a noise level below 19 dB for two successive frame periods. The sync pulses are processed during a 16 line width gating period generated by the divider system. The measuring circuit has a built-in noise level hysteresis of approximately 3 dB.

When the "acceptable noise free" condition is found the phase detector of pin 8 is switched to not gated and normal time constant. When a higher sync pulse noise level is found the phase detector is switched over to slow time constant and gated sync pulse phase detection. At the same time the integration time of the vertical sync pulse separator is adapted.

$$S/N = 20 \text{ Log} \frac{\text{Video voltage (black to white p-p)}}{\text{Noise}_{\text{rms}}}$$

**Phase detector**

The phase detector circuit is connected to pin 8. This circuit consists of 3 separate phase detectors which are activated depending on the voltage of pin 18 and the state of the sync pulse noise detection circuit. For normal and fast time constants all three phase detectors are activated during the vertical blanking period, this with the exception of the anti-top-flutter pulse period, and the separated vertical sync-pulse time. As a result, phase jumps in the video signal related to the video head, take over of video recorders are quickly restored within the vertical blanking period. At the end of the blanking period the phase detector time constant is increased by 1.5 times. In this way there is no requirement for external VTR time constant switching, and so all station numbers are suitable for signals from VTR, video games or home computers.

For quick locking of a new TV station starting from a noise only signal condition (normal time constant) a special circuit is incorporated. A new TV station which is not locked to the horizontal oscillator will result in a voltage decrease below 0.1 V at pin 18. This will activate a frame period counter which switches the phase detector to fast for 3 frame periods during the vertical scan period.

The horizontal oscillator will now lock to the new TV-station and as a result, the voltage on pin 18 will increase to approximately 6.5 V. When pin 18 reaches a level of 1.8 V the mute output transistor of pin 13 is switched OFF and the divider is set to the large window. In general the mute signal is switched OFF within 5 ms (pin  $C_{18} = 47$  nF) after reception of a new TV-signal. When the voltage on pin 18 reaches a level of 5 V, usually within 15 ms, the frame counter is switched OFF and the time constant is switched from fast to normal during the vertical scan period.

If the new TV station is weak, the sync-noise detector is activated. This will result in a change over of pin 18 voltage from 6.5 V to  $\approx 10$  V. When pin 18 exceeds the level of 7.8 V the phase detector is switched to slow time constant and gated sync pulse condition. The current is also reduced during the vertical blanking period by 1 mA. When desired, most conditions of the phase detector can also be set by external means in the following way:

- Fast time constant TV transmitter identification circuit not active, connect pin 18 to earth (pin 9).
- Fast time constant TV transmitter identification circuit active, connect a resistor of 220 k $\Omega$  between pin 18 and ground.  
This condition can also be set by using a 3.6 V stabistor diode instead of a resistor.
- Slow time constant, (with exception of frame blanking period), connect pin 18 via a resistor of 10 k $\Omega$  to +12 V, pin 10. In this condition the transmitter identification circuit is not active.
- No switching to slow time constant desired (transmitter identification circuit active), connect a 6.8 V zener diode between pin 18 and ground.

Fig. 2 illustrates the operation of the 3 phase detector circuits.

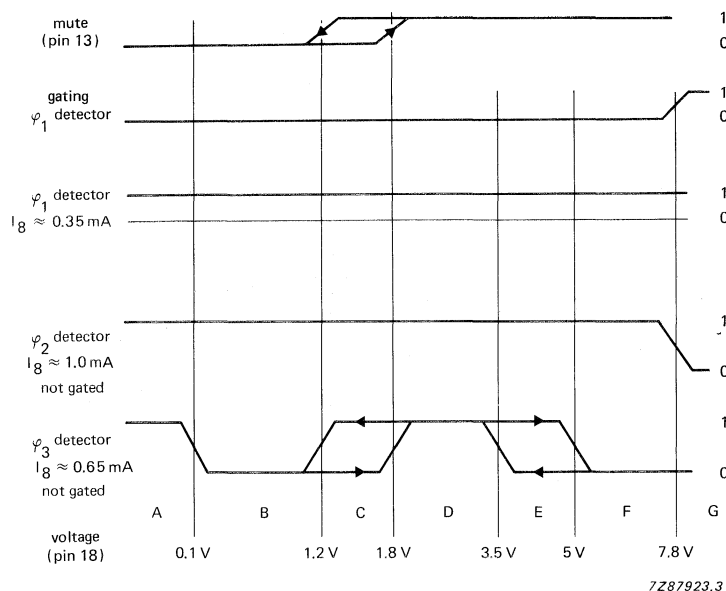


Fig. 2 Timing diagram, phase detectors.

**Supply** (pins 9, 10 and 16)

The IC has been designed such that the horizontal oscillator and output stage can start operating by application of a very low supply current into pin 16.

The horizontal oscillator starts at a supply current of approximately 4 mA. The horizontal output stage is forced into the non-conducting stage until the supply current has a typical value of 5 mA. The circuit has been designed so that after starting the horizontal output function a current drop of  $\approx 1$  mA is allowed. The starting circuit has the ability to derive the main supply (pin 10) from the horizontal output stage. The horizontal output signal can also be used as the oscillator signal for synchronized switched mode power supplies. The maximum allowed starting current is 9.7 mA ( $T_{amb} = 25$  °C). The main supply should be connected to pin 10, and pin 9 should be used as ground. When the voltage on pin 10 increases from zero to its final value (typically 12 V) a part of the supply current of the starting circuit is taken from pin 10 via internal diodes, and the voltage on pin 16 will stabilize to a typical value of 9.4 V.

In a stabilized condition (pin  $V_{10} > 10$  V) the minimum required supply current to pin 16 is  $\approx 2.5$  mA. All other IC functions are switched on via the main supply voltage on pin 10. When the voltage on pin 10 reaches a value of  $\approx 7$  V the horizontal phase detector circuit is activated and the vertical ramp on pin 3 is started. The second phase detector circuit and burst pulse circuit are started when the voltage on pin 10 reaches the stabilized voltage value of pin 16 which is typically 9.4 V.

To close the second phase detector loop, a flyback pulse must be applied to pin 12. When no flyback pulse is detected the duty factor of the horizontal output stage is 50%.

For remote switch-off pin 16 can be connected to ground (via a npn transistor with a series resistor of  $\approx 500$   $\Omega$ ) which switches off the horizontal output.

**Horizontal oscillator, horizontal output transistor, and second phase detector** (pins 11, 12, 14 and 15)

The horizontal oscillator is connected to pin 15. The frequency is set by an external RC combination between pin 15 and ground, pin 9. The open collector horizontal output stage is connected to pin 11. An internal zener diode configuration limits the open voltage of pin 11 to  $\approx 14.5$  V.

The horizontal output transistor at pin 11 is blocked until the current into pin 16 reaches a value of  $\approx 5$  mA.

A higher current results in a horizontal output signal at pin 11, which starts with a duty factor of  $\approx 40\%$  HIGH.

The duty factor is set by an internal current-source-loaded npn emitter follower stage connected to pin 14 during starting. When pin 16 changes over to voltage stabilization the npn emitter follower and current source load at pin 14 are switched OFF and the second phase detector circuit is activated, provided a horizontal flyback pulse is present at pin 12. When no flyback pulse is detected at pin 12 the duty factor of the horizontal output stage is set to 50%.

The phase detector circuit at pin 14 compensates for storage time in the horizontal deflection output stage. The horizontal output pulse duration is 29  $\mu$ s HIGH for storage times between 1  $\mu$ s and 17  $\mu$ s (29  $\mu$ s flyback pulse of 12  $\mu$ s). A higher storage time increases the HIGH time. Horizontal picture shift is possible by forcing an external charge or discharge current into the capacitor at pin 14.

**Mute output and 50/60 Hz identification (pin 13)**

The collector of an npn transistor is connected to pin 13. When the voltage on pin 18 drops below 1.2 V (no TV-transmitter) the npn transistor is switched ON.

When the voltage on pin 18 increases to a level of  $\approx 1.8$  V (new TV-transmitter found) the npn transistor is switched OFF.

Pin 13 has also the possibility for 50/60 Hz identification. This function is available when pin 13 is connected to pin 10 (+ 12 V) via an external pull-up resistor of 10 to 20 k $\Omega$ . When no TV-transmitter is identified the voltage on pin 13 will be LOW (< 0.5 V). When a TV-transmitter with a divider ratio > 576 (50 Hz) is detected the output voltage of pin 13 is HIGH (+ 12 V).

When a TV-transmitter with a divider ratio < 576 (60 Hz) is found an internal pnp transistor with its emitter connected to pin 13 will force this pin output voltage down to  $\approx 7.6$  V.

**Sandcastle output (pin 17)**

The sandcastle output pulse generated at pin 17, has three different voltage levels. The highest level, (10.4 V), can be used for burst gating and black level clamping. The second level (4.5 V) is obtained from the horizontal flyback pulse at pin 12, and is used for horizontal blanking. The third level (2.5 V) is used for vertical blanking and is derived via the vertical divider system. For 50 Hz the blanking pulse duration is 42 clock pulses and for 60 Hz it is 34 clock pulses started from the vertical divider reset. For TV-signals which have a divider ratio between 622 and 628 or between 522 and 528 the pulse is started at the first equalizing pulse. With the 50/60 Hz information the burst-key pulse width is switched to improve the behaviour in multi-norm concepts.



**RATINGS**

Limiting values in accordance with Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Start current	$I_{16}$	—	9.7	mA
Supply voltage	$V_{10}$	—	13.2	V
Total power dissipation	$P_{tot}$	—	1.2	W
Storage temperature range	$T_{stg}$	-55	+ 150	°C
Operating ambient temperature range	$T_{amb}$	-25	+ 70	°C

**Thermal resistance**

From junction to ambient in free air

 $R_{th\ j-a}$  50 K/W

DEVELOPMENT DATA

## CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $I_{16} = 6.2\text{ mA}$ ;  $V_{10} = 12\text{ V}$ ; unless otherwise specified

Voltage measurements are taken with respect to pin 9 (ground)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply current (pin 16)						
$V_{10} = 0\text{ V}$		$I_{16}$	6.2	—	9.7	mA
$V_{10} = 10\text{ V}$		$I_{16}$	2.5	—	9.7	mA
Stabilized voltage (pin 16)		$V_{16}$	8.9	9.4	9.8	V
Current consumption (pin 10)		$I_{10}$	—	70	85	mA
Supply voltage range (pin 10)		$V_P$	10	12	13.2	V
<b>Video input (pin 5)</b>						
Top sync level		$V_5$	1.5	3.1	3.75	V
Sync pulse amplitude (peak-to-peak value)	note 1	$V_5(p-p)$	0.05	0.6	1.0	V
Slicing level	note 2		35	50	65	%
Delay between video input and detector output (see also Fig. 3)			0.2	0.3	0.55	$\mu\text{s}$
Sync pulse noise level detector circuit active	note 3	S/N	—	19	—	dB
<b>Sync pulse</b>						
Noise level detector circuit hysteresis			—	3	—	dB
<b>Noise gate (pin 5)</b>						
Switching level		$V_5$	—	+ 0.7	+ 1	V
<b>First control loop (pin 8)</b> (horizontal oscillator to sync)						
Holding range		$\Delta f$	—	$\pm 800$		Hz
Catching range		$\Delta f$	$\pm 700$	$\pm 800$	$\pm 1100$	
Control sensitivity video with respect to burst-key and flyback-pulse						
Slow time constant			—	2.1	—	kHz/ $\mu\text{s}$
Normal time constant			—	5.2	—	kHz/ $\mu\text{s}$
Fast time constant			—	3.2	—	kHz/ $\mu\text{s}$
Phase modulation due to hum on the supply line (pin 10)	note 4		—	0.2	—	$\mu\text{s}/V_{tt}$
Phase modulation due to hum on input current (pin 16)	note 4		—	0.08	—	$\mu\text{s}/V_{tt}$

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Second control loop</b> (pin 14) (horizontal flyback to horizontal oscillator)						
Control sensitivity	$t_d = 10 \mu s$	$\Delta t_d / \Delta t_o$	200	300	600	$\mu s$
Control range		$t_d$	1	—	>45	$\mu s$
Control range for constant duty factor horizontal output		$t_d$		29	(-t flyback pulse)	$\mu s$
Controlled edge of horizontal output signal (pin 11)				positive		
<b>Phase adjustment</b> (pin 14) (via second control loop)						
Control sensitivity	$t_d = 10 \mu s$		—	25	—	$\mu A / \mu s$
Maximum allowed control current		$I_{14}$	—	—	$\pm 60$	$\mu A$
<b>Horizontal oscillator</b> (pin 15)						
	$C = 2.7 \text{ nF};$ $R_{osc} = 34.8 \text{ k}\Omega$					
Frequency (no sync)		$f$	—	15625	—	Hz
Spread (fixed external component, no sync)		$\Delta f$	—	—	$\pm 4$	%
Frequency deviation between starting point output signal and stabilized condition		$\Delta f$	—	+6	+8	%
Temperature coefficient		$T_C$	—	$-1.10^{-4}$	—	/K
<b>Horizontal output</b> (pin 11) (Open collector)						
Output voltage high		$V_{11}$	—	—	13.2	V
Start voltage protection (internal zener diode)		$V_{11}$	13	—	15.8	V
Low input current (pin 16) protection output enabled		$I_{16}$	—	5.5	6.2	mA
Output voltage low start condition	$I_{11} = 10 \text{ mA}$	$V_{11}$	—	0.1	0.5	V
Duty factor output current during starting	$I_{16} = 6.2 \text{ mA}$		50	60	70	%
Output voltage low normal condition	$I_{11} = 25 \text{ mA}$	$V_{11}$	—	0.3	0.5	V
Duty factor output current without flyback pulse (pin 12)			45	50	55	%
Duration of the output pulse HIGH	$T_d = 8 \mu s$		27	29	31	$\mu s$
Controlled edge				positive		
Temperature coefficient horizontal output pulse			—	$-5.10^{-2}$	—	$\mu s / ^\circ C$

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Sandcastle output signal</b> (pin 17)	$I_L = 1 \text{ mA}$					
Output voltage during:						
burst-key		V <sub>17</sub>	9.8	10.4	—	V
horizontal blanking		V <sub>17</sub>	4.1	4.5	4.9	V
vertical blanking		V <sub>17</sub>	2.1	2.5	2.9	V
Zero level output voltage	$I_{\text{sink}} = 0.5 \text{ mA}$	V <sub>17</sub>	—	—	0.7	V
Pulse width:						
burst-key (50 Hz)		t <sub>p</sub>	3.95	4.25	4.7	μs
burst-key (60 Hz)		t <sub>p</sub>	3.45	3.75	4.1	μs
Horizontal blanking		V <sub>12</sub>	—	1.0	—	V
Vertical blanking	note 5					
Phase position burstkey						
time between middle sync						
pulse at pin 5 and start of						
burst pulse at pin 17			2.3	2.7	3.1	μs
Time between start sync pulse						
and end of burst pulse at pin 17						
(50 Hz)			—	9.3	9.7	μs
(60 Hz)			—	8.8	9.2	μs
<b>Coincidence detector, video transmitter identification circuit and time constant switching levels</b> (see also Fig. 1)						
Detector output current		I <sub>18</sub>	—	0.25	—	mA
Voltage level for in sync condition ( $\varphi_1$ normal)		V <sub>18</sub>	5.8	6.5	7.0	V
Voltage for noisy sync pulse ( $\varphi_1$ slow and gated)		V <sub>18</sub>	9	10	—	V
Voltage level for noise only	note 6	V <sub>18</sub>	—	0.3	—	V
Switching level normal to fast		V <sub>18</sub>	< 3.2	3.5	3.8	V
Switching level						
mute output active and						
fast to normal		V <sub>18</sub>	< 1.0	1.2	1.4	V
Switching level frame period counter (3 periods fast)		V <sub>18</sub>	< 0.08	0.12	0.16	V
Switching level:						
normal to fast (locking)						
mute output inactive		V <sub>18</sub>	> 1.5	1.75	1.9	V
Switching level fast to normal (locking)		V <sub>18</sub>	> 4.7	5.0	5.3	V
Switching level normal to slow (gated sync pulse)		V <sub>18</sub>	7.4	7.8	8.2	V

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Video transmitter identification output (pin 13)</b>						
Output voltage active (no sync)	$I_{13} = 1 \text{ mA}$	$V_{13}$	—	0.15	0.32	V
Sink current active (no sync)	$V_{13} < 1 \text{ V}$	$I_{13}$	—	—	5	mA
Output current inactive (sync 50 Hz)		$I_{13}$	—	—	1	$\mu\text{A}$
<b>50/60 Hz identification (pin 13)</b> ( $R_{13}$ positive supply $12 \text{ k}\Omega$ )						
Emitter follower, pnp:						
60 Hz: $2 \times f_H < 576 \text{ voltage}$ $\frac{f_V}{f_H}$		$V_{13}$	7.2	7.65	8.1	V
50 Hz: $2 \times f_H > 576 \text{ voltage}$ $\frac{f_V}{f_H}$		$V_{13}$	—	$V_{10}$	—	V
<b>Flyback input pulse (pin 12)</b>						
Switching level		$V_{12}$	—	+1	—	V
Input current		$I_{12}$	+0.2	—	+3	mA
Input pulse		$V_{12}$	—	—	12	Vp
Input resistance			—	3.5	—	$\text{k}\Omega$
Phase position without shift time between the middle of the sync pulse at pin 5 and the middle of the horizontal blanking pulse at pin 17		$t_d$	2.1	2.5	2.9	$\mu\text{s}$
<b>Vertical ramp generator (pin 3)</b>						
Pulse width charge current		—	—	26	—	clock pulses
Charge current		$I_3$	—	3	—	mA
Top level ramp signal voltage						
Divider in 50 Hz mode	note 7	$V_3$	5.5	5.85	6.3	V
Divider in 60 Hz mode	note 7	$V_3$	4.7	5.0	5.4	V
Ramp amplitude	$C_3 = 150 \text{ nF}$ ,					
$R_4 = 330 \text{ k}\Omega$ 50 Hz	note 7		—	3.1	—	Vp
$R_4 = 330 \text{ k}\Omega$ 60 Hz	note 7		—	2.5	—	Vp
Temperature coefficient	$I_4 = 30 \mu\text{A}$	$I_3$	—	+ 100	—	$10^{-6}/\text{K}$

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Current source (pin 4)</b>						
Output voltage	$I_4 = 30 \mu\text{A}$	$V_4$	7.2	7.7	8.1	V
Allowed current range		$I_4$	10	—	75	$\mu\text{A}$
Temperature coefficient output voltage	$I_4 = 30 \mu\text{A}$	TC	—	+ 50	—	$10^{-6}/\text{K}$
<b>Comparator (pin 2)</b>						
	$C_3 = 150 \text{ nF};$ $R_4 = 330 \text{ k}\Omega$					
Input voltage						
DC level	note 7	$V_2$	0.9	1.0	1.1	V
AC level		$V_2$	—	0.8	—	$V_P$
Deviation amplitude 50/60 Hz			—	1.75	2.5	%
<b>Vertical output stage (pin 1)</b> (nnp emitter follower)						
Output voltage	$I_O \text{ pin 1} = +1.5 \text{ mA}$ note 7	$V_1$	5.2	5.7	6.5	V
$R_S$ , sync separator resistor			—	150	—	$\Omega$
Continuous sink current			—	0.35	—	$\text{mA}$
<b>Vertical guard circuit (pin 2)</b>						
Active ( $V_{17} = 2.5 \text{ V}$ )						
Switching level LOW	note 7	$V_2$	> 1.7	1.85	2.0	V
Switching level HIGH	note 7	$V_2$	< 0.25	0.35	0.45	V

## Notes to the characteristics

- Up to 1 V peak-to-peak the slicing level is constant, at amplitudes exceeding 1 V peak-to-peak the slicing level will increase.
- The slicing level is fixed by the formula:

$$P = \frac{R_S}{5.3 + R_S} \times 100\% \quad (R_S \text{ value in k}\Omega)$$

- $S/N = 20 \log \frac{\text{video voltage black to white (p-p)}}{\text{noise (rms)}}$   
measured with 1  $V_{p-p}$  video input

- Measured between pin 5 and sandcastle output pin 17.

- Divider in search (large) mode:

start: reset divider = start vertical sync plus 1 clock pulse

stop:  $n = \frac{2 \times f_H}{f_V} > 576 \text{ clock pulse } 42$

$n = \frac{2 \times f_H}{f_V} < 576 \text{ clock pulse } 34$

Divider in small window mode:

start: clock pulse 517 (60 Hz) clock pulse 619 (50 Hz)

stop: clock pulse 34 (60 Hz) clock pulse 42 (50 Hz)

- Depends on DC level of pin 5, given value is valid for  $V_5 \approx 5 \text{ V}$ .
- Value related to internal zener diode reference voltage source spread includes the complete spread of reference voltage.

DEVELOPMENT DATA

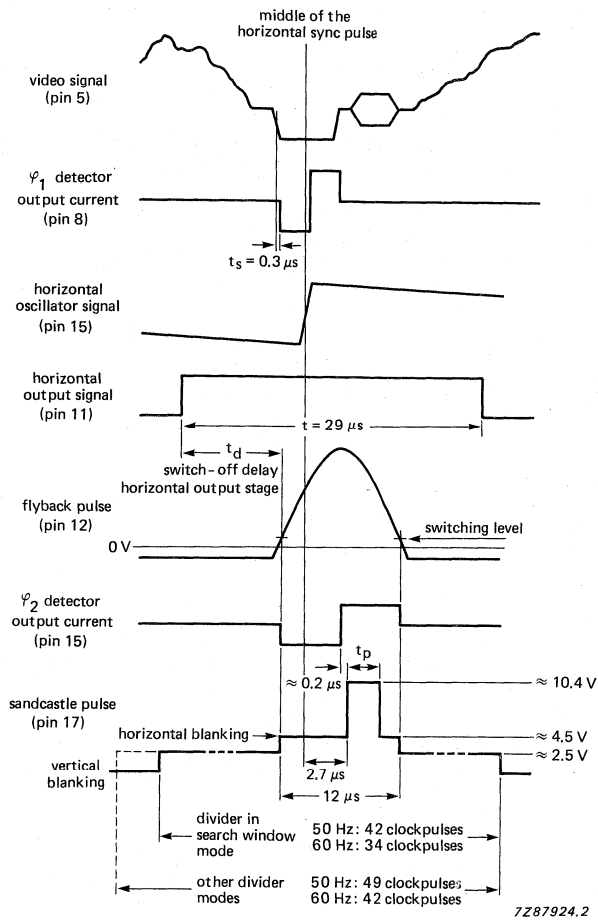


Fig. 3 Timing diagram of the TDA2579A.

APPLICATION INFORMATION

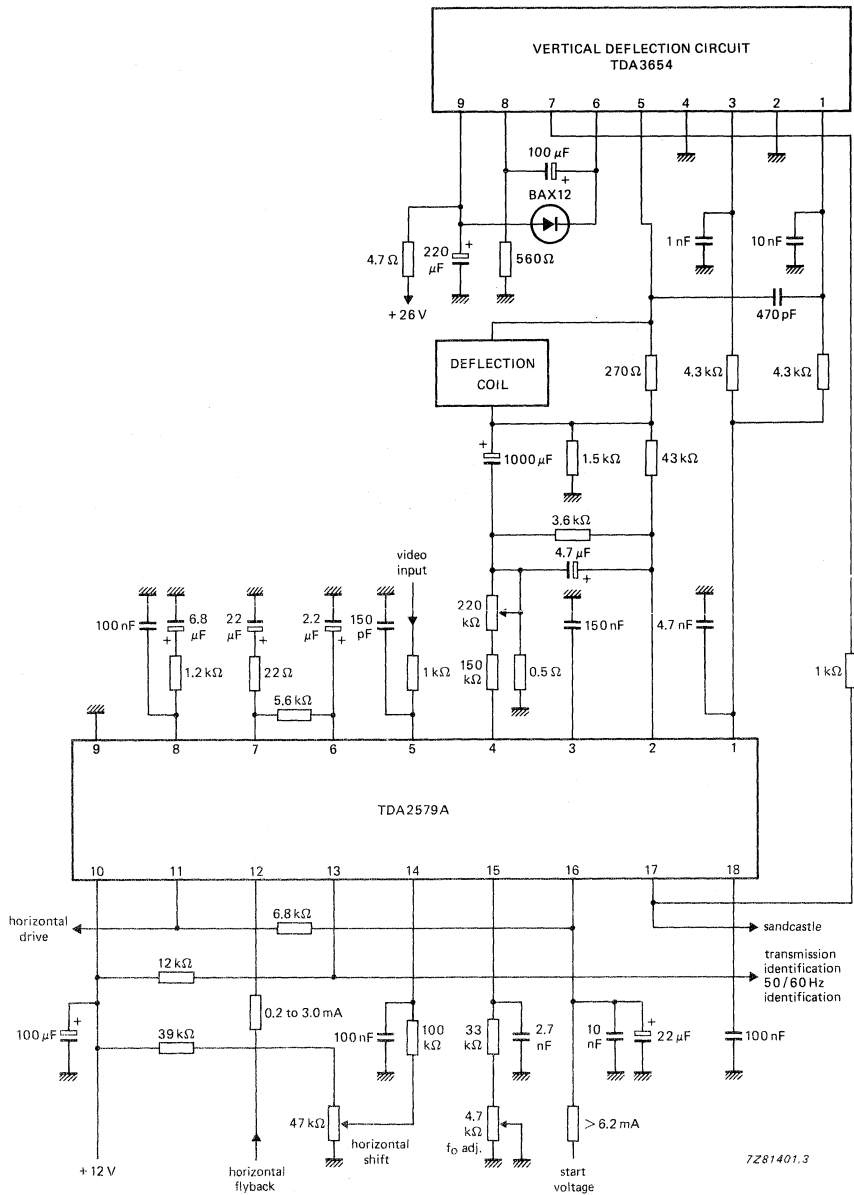


Fig. 4 TDA2579A 110° application circuit (45AX).



## CONTROL CIRCUIT FOR SMPS

The TDA2581 is a monolithic integrated circuit for controlling switched-mode power supplies (SMPS) which are provided with the drive for the horizontal deflection stage.

The circuit features the following:

- Voltage controlled horizontal oscillator.
- Phase detector.
- Duty factor control for the positive-going transient of the output signal.
- Duty factor increases from zero to its normal operation value.
- Adjustable maximum duty factor.
- Over-voltage and over-current protection with automatic re-start after switch-off.
- Counting circuit for permanent switch-off when n-times over-current or over-voltage is sensed.
- Protection for open-reference voltage.
- Protection for too low supply voltage.
- Protection against loop faults.
- Positive tracking of duty factor and feedback voltage when the feedback voltage is smaller than the reference voltage minus 1,5 V.

### QUICK REFERENCE DATA

Supply voltage	V <sub>9-16</sub>	typ.	12 V
Supply current	I <sub>g</sub>	typ.	15 mA
<b>Input signals</b>			
Horizontal drive pulse (peak-to-peak value)	V <sub>3-16(p-p)</sub>	typ.	11 V
Flyback pulse (differentiated deflection current); peak-to-peak value	V <sub>2-16(p-p)</sub>	typ.	5 V
External reference voltage	V <sub>10-16</sub>	typ.	6,7 V
<b>Output signals</b>			
Duty factor of output pulse	$\delta$	> <	0 % 98 ± 0,6 %
Output voltage at I <sub>O</sub> < 20 mA (peak value)	V <sub>11-16M</sub>	typ.	11,8 V
Output current (peak value)	I <sub>11M</sub>	<	40 mA


### PACKAGE OUTLINES

TDA2581: 16-lead DIL; plastic (SOT-38).

TDA2581Q: 16-lead QIL; plastic (SOT-58).

# TDA2581 TDA2581Q

## BLOCK DIAGRAM

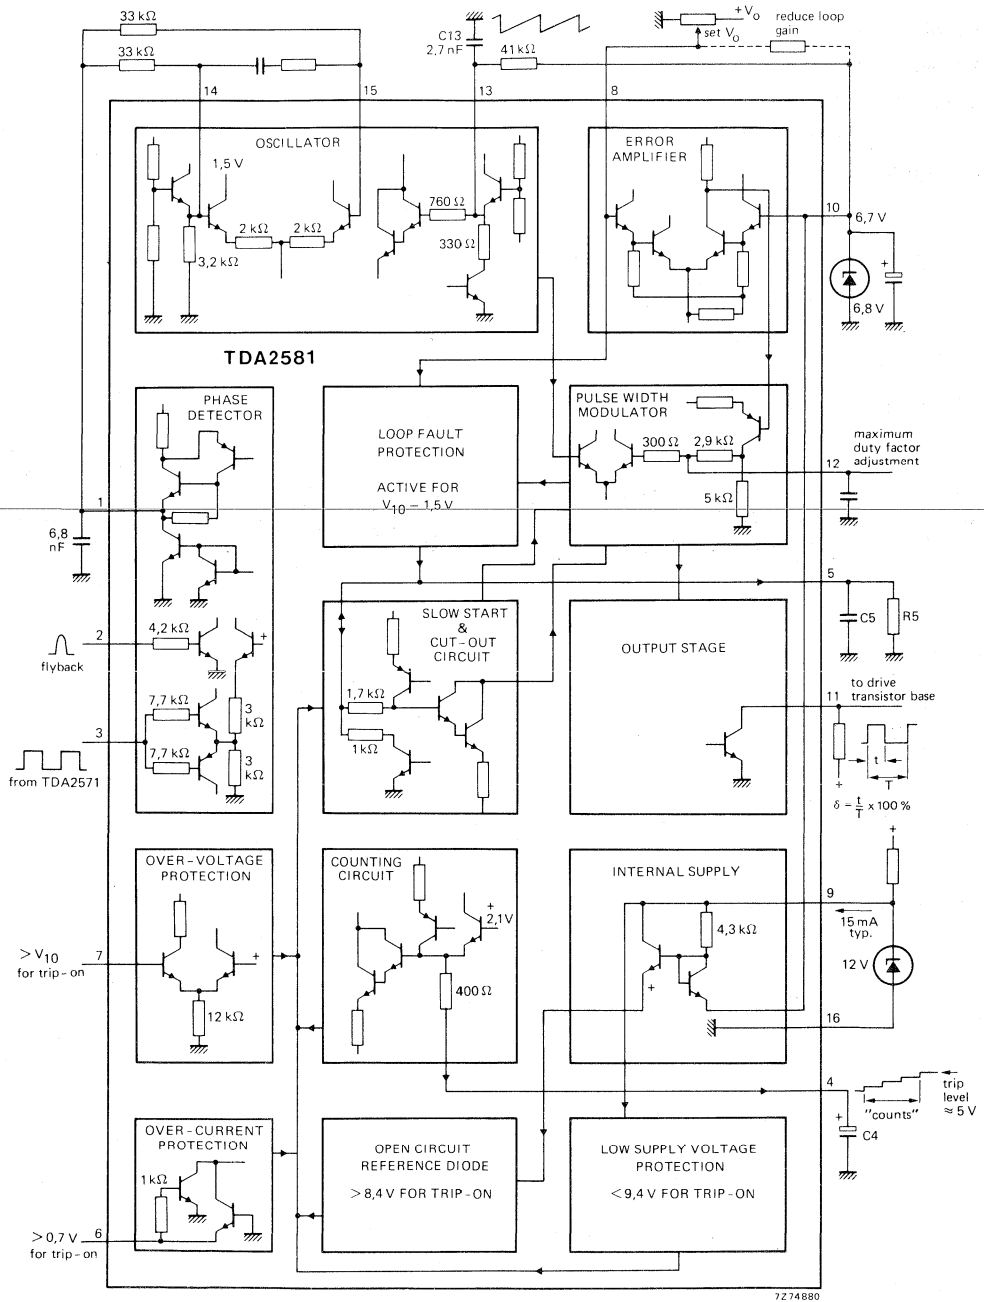

Note: trip levels are nominal values.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	V <sub>9-16</sub>	max.	14 V
Voltage at pin 11	V <sub>11-16</sub>		0 to 14 V
Output current	I <sub>11</sub>	max.	40 mA
Total power dissipation	P <sub>tot</sub>	max.	340 mW
Storage temperature	T <sub>stg</sub>		-25 to +125 °C
Operating ambient temperature	T <sub>amb</sub>		-25 to +80 °C

## CHARACTERISTICS

V<sub>9-16</sub> = 12 V; V<sub>10-16</sub> = 6,7 V; T<sub>amb</sub> = 25 °C; measured in the circuit on page 314

Supply voltage range	V <sub>9-16</sub>	typ.	12 V 10 to 14 V
Protection voltage too low supply voltage	V <sub>9-16</sub>	typ.	9,4 V 8,6 to 9,9 V
Supply current at $\delta = 50\%$	I <sub>g</sub>	typ.	15 mA
Supply current during protection	I <sub>g</sub>	typ.	15 mA
Minimum required supply current	I <sub>g</sub>	<	18,5 mA*
Power consumption	P	typ.	180 mW

## Required input signals

Reference voltage	V <sub>10-16</sub>	typ.	6,7 V 5,6 to 7,5 V**
High reference voltage protection: threshold voltage	V <sub>10-16</sub>	typ.	8,4 V 7,9 to 8,9 V
Feedback input impedance at pin 8	Z <sub>8-16</sub>	typ.	200 k $\Omega$
Horizontal drive pulse (square-wave or differentiated; negative transient is reference) peak-to-peak value	V <sub>3-16(p-p)</sub>	typ.	11 V 5 to 12 V
Flyback pulse or differential deflection current	V <sub>2-16</sub>		1 to 5 V
Over-current protection: threshold voltage	-V <sub>6-16</sub>	typ.	640 mV 690 to 695 mV▲
	+V <sub>6-16</sub>	typ.	680 mV 640 to 735 mV▲
Over-voltage protection: threshold voltage	V <sub>7-16</sub>	typ.	V <sub>10-16</sub> -60 mV V <sub>10-16</sub> -130 to V <sub>10-16</sub> -0 mV

\* This value refers to the minimum required supply current that will start all devices under the following conditions: V<sub>9-16</sub> = 10 V; V<sub>10-16</sub> = 6,8 V;  $\delta = 50\%$ .

\*\* Voltage obtained via an external reference diode. Specified voltages do not refer to the nominal voltages of reference diodes.

▲ This spread is inclusive temperature rise of the IC due to warming up. For other ambient temperatures the values must be corrected by using a temperature coefficient of typical -1,85 mV/°C.

**CHARACTERISTICS** (continued)

Remote control voltage; switch off	V <sub>4-16</sub>	>	5,8 V*
switch on	V <sub>4-16</sub>	<	4,5 V*

**Delivered output signals**

Horizontal drive pulse (loaded with a resistor of 560 Ω to +12 V) peak-to-peak value	V <sub>11-16(p-p)</sub>	>	11,6 V
Output current; peak value	I <sub>11M</sub>	<	40 mA
Saturation voltage of output transistor at I <sub>11</sub> = 20 mA	V <sub>CEsat</sub>	typ. <	200 mV 400 mV
at I <sub>11</sub> = 40 mA	V <sub>CEsat</sub>	<	525 mV
Duty factor of output pulse**	δ	>	0 %
		<	98 ± 0,6 %
Charge current for capacitor on pin 4	I <sub>4</sub>	typ.	120 μA
Charge current for capacitor on pin 5	I <sub>5</sub>	typ.	130 μA
Supply current for reference	I <sub>10</sub>	typ.	1 mA
			0,6 to 1,45 mA

**Oscillator**


Temperature coefficient		typ.	-300 ppm/°C
		<	-400 ppm/°C
Relative frequency deviation for V <sub>10-16</sub> changing from 6 to 7 V		typ.	-1,5 %
		≤	-2 %
Oscillator frequency spread (with fixed external components)		≤	±3 %
Frequency control sensitivity at pin 15		typ.	4,5 kHz/V▲

**Phase control loop**

Loop gain of APC-system (automatic phase control)		typ.	5 kHz/μs
Catching range	Δf	typ.	±1,5 kHz
Phase relation between negative transient of sync pulse and middle of flyback	t	typ.	1 μs
Tolerance of phase relation	Δt	≤	±0,4 μs

\* See application information pin 4.

\*\* The duty factor is specified as follows:





The maximum duty factor value can be set to a desired value (see application information pin 12).

▲ For component values see block diagram.

**PINNING**

1. Phase detector output
2. Flyback pulse position input
3. Reference frequency input
4. Re-start count capacitor/remote control input
5. Slow start and transfer characteristic for low feedback voltages
6. Over-current protection input
7. Over-voltage protection input
8. Feedback voltage input
9. Positive supply
10. Reference input
11. Output
12. Maximum duty factor adjustment/smoothing
13. Oscillator timing network
14. Reactance stage reference voltage
15. Reactance stage input
16. Negative supply (ground)

APPLICATION INFORMATION

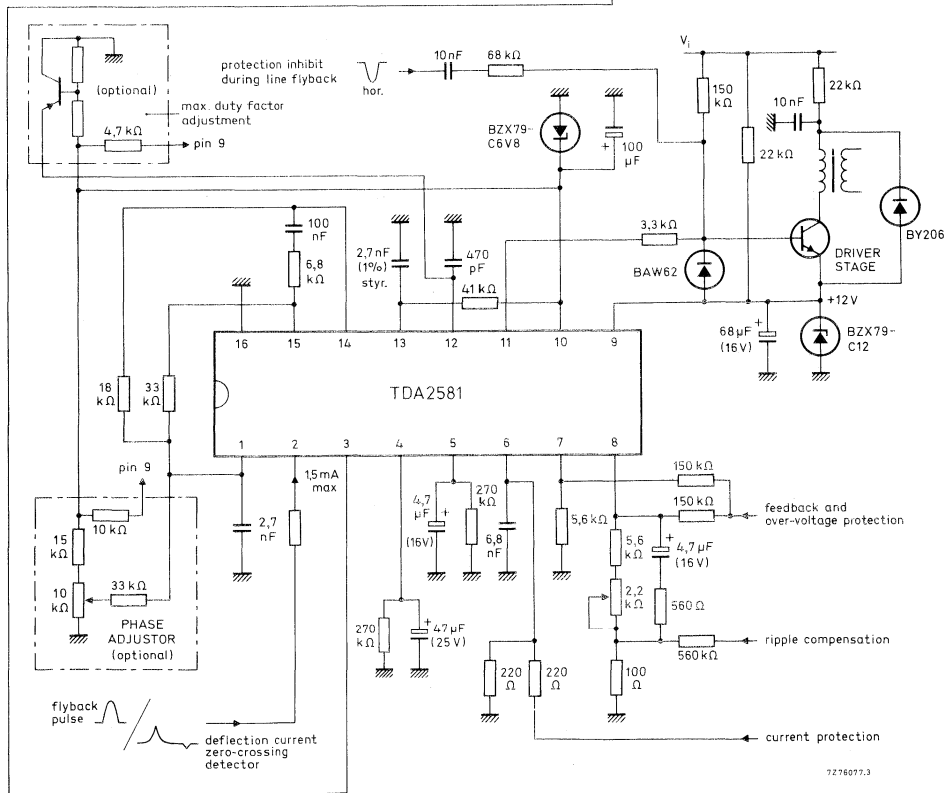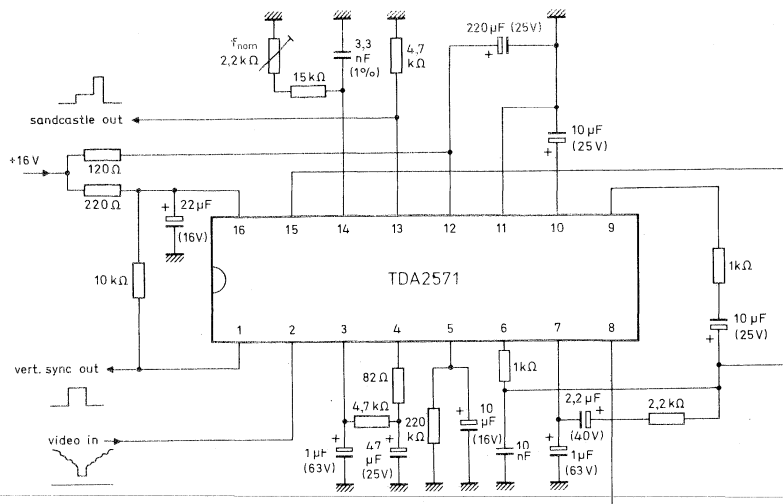

The TDA2571 and TDA2581 controlling an SMPS driver stage.

The function is quoted against the corresponding pin number

#### 1. Phase detector output


The output circuit consists of a bidirectional current source which is active for the time that the signal on pin 2 exceeds 1 V.

The current values are chosen such that the correct phase relation is obtained when the reference signal on pin 3 is delivered by the TDA2571.


With a resistor of 18 k $\Omega$  and a capacitor of 2,7 nF the control steepness is 0,55 V/ $\mu$ s.

#### 2. Flyback pulse input

The signal applied to pin 2 is normally a flyback pulse with a duration of about 12  $\mu$ s. However, the phase detector system also accepts a signal derived by differentiating the deflection current by means of a small toroidal core (pulse duration > 3  $\mu$ s).



(a)

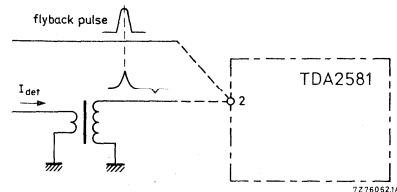

(b)

The toroidal transformer in (a) is for obtaining a pulse representing the mid-flyback from the deflection current. The connection of the picture phase information is shown in (b).

#### 3. Reference frequency input

The input circuit can be driven directly by the square-wave output voltage from pin 8 of the TDA2571.

The negative-going transient switches the current source connected to pin 1 from positive to negative. The input circuit is made such that a differentiated signal of the square-wave from the TDA2571 is also accepted (this enables mains isolation). The input circuit switching level is about 3 V and the input impedance is about 10 k $\Omega$ .

#### 4. Re-start count capacitor/remote control input

##### Counting

An external capacitor ( $C_4 = 47 \mu\text{F}$ ) is connected between pins 4 and 16. This capacitor controls the characteristics of the protection circuits as follows.

If the protection circuits are required to operate, e.g. over-current at pin 6, the duty factor will be set to zero thus turning off the power supply.

After a short interval (determined by the time constant on pin 5) the power supply will be restarted via the slow start circuit.

If the fault condition has cleared, then normal operation will be resumed. If the fault condition is persistent, the duty factor of the pulses is again reduced to zero and the protection cycle is repeated.

The number of times this action is repeated ( $n$ ) for a persisting fault condition is now determined by:  $n = C_4/C_5$ .

APPLICATION INFORMATION (continued)

*Remote control input*

For this application the capacitor on pin 4 has to be replaced by a resistor with a value between 4,7 and 18 k $\Omega$ . When the externally applied voltage  $V_{4-16} > 5,8$  V, the circuit switches off; switching on occurs when  $V_{4-16} < 4,5$  V and the normal starting-up procedure is followed. Pin 4 is internally connected to an emitter-follower, with an emitter voltage of 1,5 V.

5. Slow start and transfer characteristics for low feedback voltages

*Slow start*

An external shunt capacitor ( $C5 = 4,7$   $\mu$ F) and resistor ( $R5 = 270$  k $\Omega$ ) are connected between pins 5 and 16. The network controls the rate at which the duty factor increases from zero to its steady-state value after switch-on. It provides protection against surges in the power transistor.

*Transfer characteristic for low feedback voltages*

The duty factor transfer characteristic for low feedback voltages can be influenced by R5. The transfer for three different resistor values is given in the graph on page 322.

6. Over-current protection input

A voltage proportional to the current in the power switching device is applied to the integrated circuit between pins 6 and 16. The circuit trips on both positive and negative polarity.

7. Over-voltage protection input

When the voltage applied to this pin exceeds the threshold level, the protection circuit will operate. When this function is not used, pin 7 should be connected to pin 16.

8. Feedback voltage input

The control loop input is applied to pin 8. This pin is internally connected to one input of a differential amplifier, functioning as an amplitude comparator, the other input of which is connected to the reference source on pin 10.

Under normal operating conditions, the voltage on pin 8 will be about equal to the reference voltage on pin 10. For further information refer to the graphs on pages 322 and 323.

9. 12 V positive supply

The maximum voltage that may be applied is 14 V. Where this is derived from an unstabilized supply rail, a regulator diode (12 V) should be connected between pins 9 and 16 to ensure that the maximum voltage does not exceed 14 V. When the voltage on this pin falls below a minimum of 8,6 V (typically 9,4 V), the protection circuit will switch-off the power supply.

10. Reference input

An external reference diode must be connected between this pin and pin 16.

The reference voltage must be between 5,6 and 7,5 V. The IC delivers about 1 mA into the external regulator diode. When the external load on the regulator diode approaches this current, replenishment of the current can be obtained by connecting a suitable resistor between pins 9 and 10.



### 11. Output

An external resistor determines the output current fed into the base of the driver transistor. The output circuit uses an n-p-n transistor with 3 series-connected clamping diodes to the internal 12 V supply rail. This provides a low impedance in the "ON" state, that is with the drive transistor turned-off.

### 12. Maximum duty factor adjustment/smoothing

#### *Maximum duty factor adjustment*

Pin 12 is connected to the output voltage of the amplitude comparator ( $V_{10-g}$ ). This voltage is internally connected to one input of a differential amplifier, the other input of which is connected to the sawtooth voltage of the horizontal oscillator. A low voltage on pin 12 results in a low duty factor. This enables the maximum duty factor to be adjusted by limiting the voltage by connecting pin 12 to the emitter of a p-n-p transistor used as a voltage source.

The graph on page 10 plots the maximum duty factor as a function of the voltage applied to pin 12. If some spread is acceptable the maximum duty factor can also be limited by connecting a resistor from pin 12 to pin 16. A resistor of 12 k $\Omega$  limits the maximum duty factor to about 50%. This application also reduces the total IC gain.

#### *Smoothing*

Any double pulsing of the IC due to circuit layout can be suppressed by connecting a capacitor of about 470 pF between pins 12 and 16.

### 13. Oscillator timing network

The timing network comprises a capacitor between pins 13 and 16, and a resistor between pin 13 and the reference voltage on pin 10.

The charging current for the capacitor (C13) is derived from the voltage reference diode connected to pin 10 and discharged via an internal resistor of about 330  $\Omega$ .


### 14. Reactance stage reference voltage

This pin is connected to an emitter follower which determines the nominal reference voltage for the reactance stage (1,5 V for reference voltage  $V_{10-16} = 6,7$  V). Free-running frequency is obtained when pins 14 and 15 are short-circuited.


### 15. Reactance stage input

The output voltage of the phase detector (pin 1) is connected to pin 15 via a resistor. The voltage applied to pin 15 shifts the upper level of the voltage sensor of the oscillator thus changing the oscillator frequency and phase. The time constant network is connected between 14 and 15. Control sensitivity is typically 4,5 kHz/V.



### 16. Negative supply (ground)

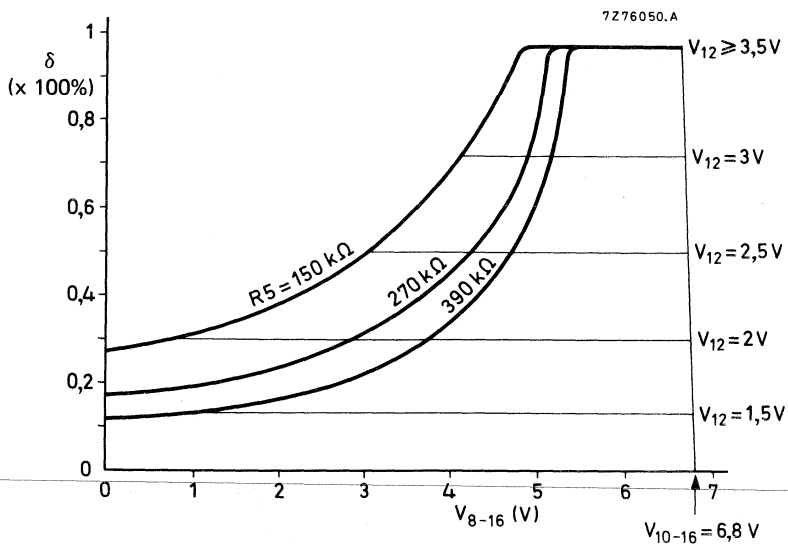

Duty factor of output pulses as a function of  $V_{8-16}$  with  $R_5$  as a parameter, and with  $V_{12}$  as a limiting value;  $V_{10-16} = 6.8V$ .

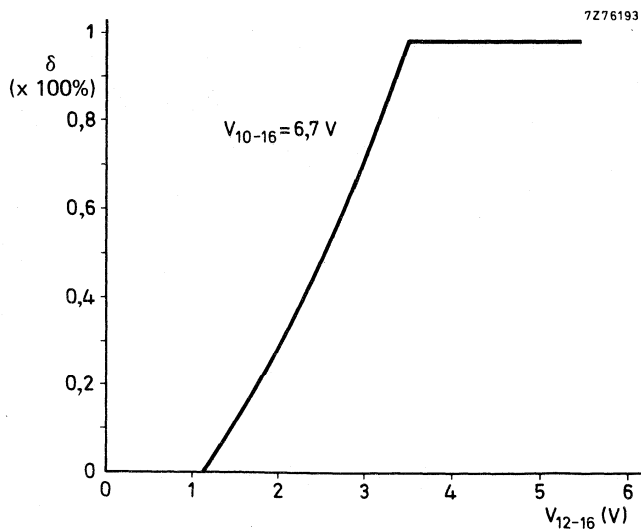

Maximum duty factor limitation as a function of  $V_{12-16}$ .

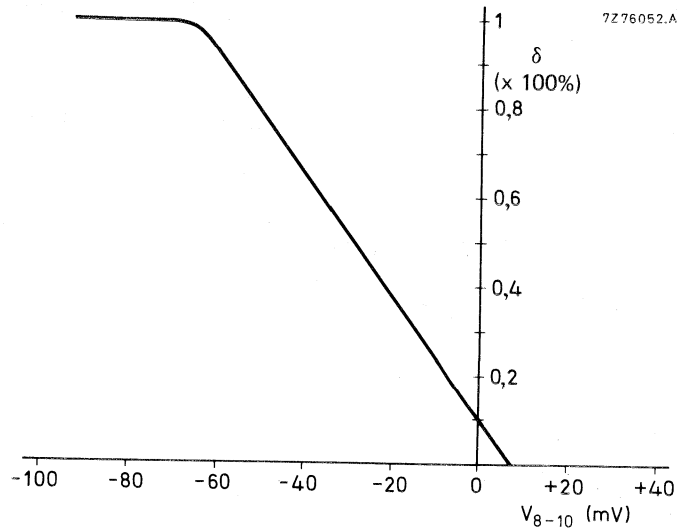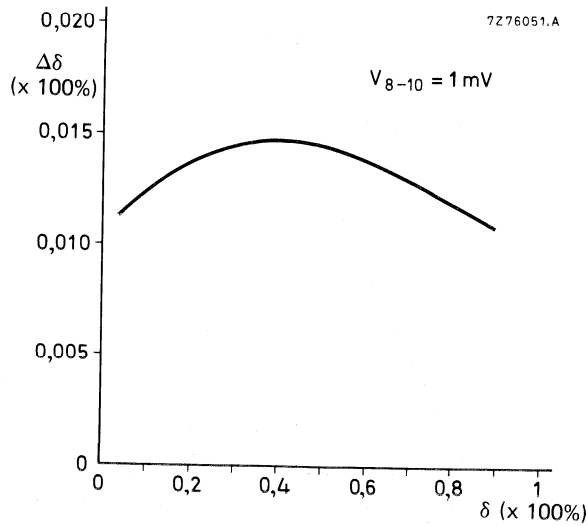Duty factor of output pulses as a function of error amplifier input ( $V_{8-10}$ ).Change in duty factor of output pulses for a 1 mV error amplifier input change ( $V_{8-10}$ ) as a function of initial duty factor.



## CONTROL CIRCUIT FOR POWER SUPPLIES

The TDA2582 is a monolithic integrated circuit for controlling power supplies which are provided with the drive for the horizontal deflection stage.

The circuit features the following:

- Voltage controlled horizontal oscillator.
- Phase detector.
- Duty factor control for the negative-going transient of the output signal.
- Duty factor increases from zero to its normal operation value.
- Adjustable maximum duty factor.
- Over-voltage and over-current protection with automatic re-start after switch-off.
- Counting circuit for permanent switch-off when n-times over-current or over-voltage is sensed.
- Protection for open-reference voltage.
- Protection for too low supply voltage.
- Protection against loop faults.
- Positive tracking of duty factor and feedback voltage when the feedback voltage is smaller than the reference voltage minus 1,5 V.
- Normal and 'smooth' remote ON/OFF possibility.

### QUICK REFERENCE DATA

Supply voltage	V <sub>9-16</sub>	typ.	12 V
Supply current	I <sub>g</sub>	typ.	14 mA
<b>Input signals</b>			
Horizontal drive pulse (peak-to-peak value)	V <sub>3-16(p-p)</sub>		5 to 11 V
Flyback pulse (differentiated deflection current); peak-to-peak value	V <sub>2-16(p-p)</sub>		1 to 5 V
External reference voltage	V <sub>10-16</sub>	typ.	6,1 V
<b>Output signals</b>			
Duty factor of output pulse	$\delta$	>	0 %
		<	98 ± 0,8 %
Output voltage at I <sub>O</sub> < 20 mA (peak value)	V <sub>11-16M</sub>	typ.	11,8 V
Output current (peak value)	I <sub>11M</sub>	<	40 mA

### PACKAGE OUTLINES

TDA2582 : 16-lead DIL; plastic (SOT-38).

TDA2582Q: 16-lead QIL; plastic (SOT-58).

TDA2582  
TDA2582Q

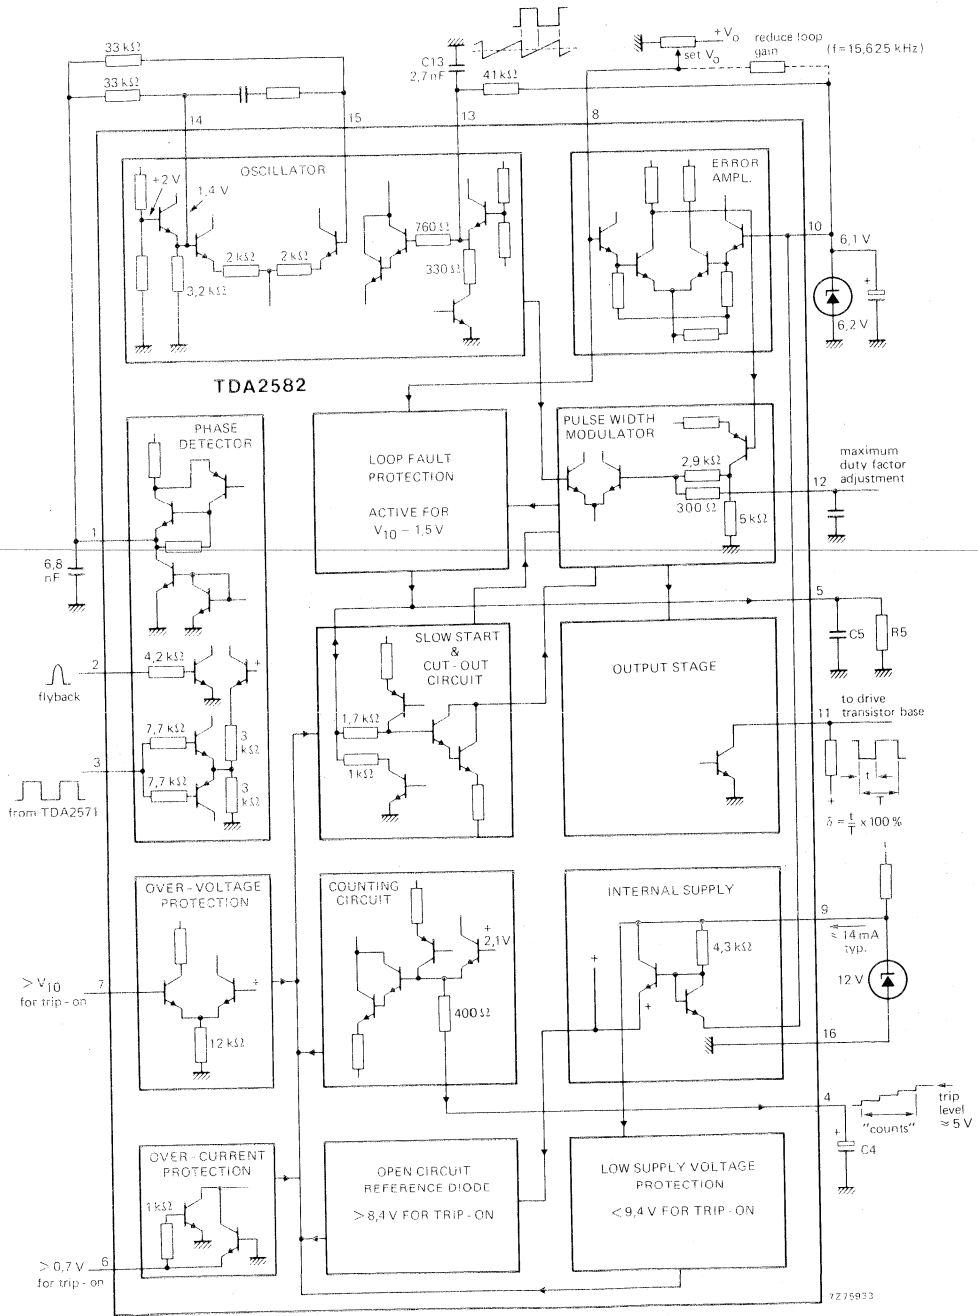


Fig. 1 Block diagram.

Note: trip levels are nominal values.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage at pin 9	$V_{9-16}$	max.	14 V
Voltage at pin 11	$V_{11-16}$		0 to 14 V
Output current (peak value)	$I_{11M}$	max.	40 mA
Total power dissipation	$P_{tot}$	max.	280 mW
Storage temperature	$T_{stg}$		-25 to + 125 °C
Operating ambient temperature	$T_{amb}$		-25 to + 80 °C

**CHARACTERISTICS** $V_{9-16} = 12 \text{ V}$ ;  $V_{10-16} = 6,1 \text{ V}$ ;  $T_{amb} = 25 \text{ °C}$ ; measured in Fig. 4

Supply voltage range	$V_{9-16}$	typ.	12 V 10 to 14 V
Protection voltage too low supply voltage	$V_{9-16}$	typ.	9,4 V 8,6 to 9,9 V
Supply current at $\delta = 50\%$	$I_g$	typ.	14 mA
Supply current during protection	$I_g$	typ.	14 mA
Minimum required supply current (note 1)	$I_g$	<	17 mA
Power consumption	$P$	typ.	170 mW

**Required input signals**

Reference voltage (note 2)	$V_{10-16}$	typ.	6,1 V 5,6 to 6,6 V
Feedback input impedance	$ Z_{8-16} $	typ.	200 k $\Omega$
High reference voltage protection: threshold voltage	$V_{10-16}$	typ.	8,4 V 7,9 to 8,9 V
Horizontal reference signal (square-wave or differentiated; negative transient is reference)			
Voltage driven (peak-to-peak value)	$V_{3-16(p-p)}$		5 to 12 V
Current driven (peak value)	$I_{3M}$		-1 to + 1,5 mA
Switching level current	$\pm I_3$	<	100 $\mu\text{A}$
Flyback pulse or differential deflection current	$V_{2-16}$		1 to 5 V
Flyback pulse current (peak value)	$I_{2M}$	<	1,5 mA
Over-current protection: (note 3)			
threshold voltage	$-V_{6-16}$	typ.	640 mV 600 to 695 mV
	$+V_{6-16}$	typ.	680 mV 640 to 735 mV

**Notes**

1. This value refers to the minimum required supply current that will start all devices under the following conditions:  $V_{9-16} = 10 \text{ V}$ ;  $V_{10-16} = 6,2 \text{ V}$ ;  $\delta = 50\%$ .
2. Voltage obtained via an external reference diode. Specified voltages do not refer to the nominal voltages of reference diodes.
3. This spread is inclusive temperature rise of the IC due to warming up. For other ambient temperatures the values must be corrected by using a temperature coefficient of typical  $-1,85 \text{ mV/°C}$ .

**CHARACTERISTICS** (continued)

Over-voltage protection:

( $V_{ref} = V_{10-16}$ ) threshold voltage	V7-16	typ.	$V_{ref}-60$ mV
			$V_{ref}-130$ to $V_{ref}-0$ mV
Remote control voltage; switch-off (note 1)	V4-16	>	5,6 V
Remote control voltage; switch-on	V4-16	<	4,5 V
'Smooth' remote control; switch-off (note 2)	V5-16	>	4,5 V
'Smooth' remote control; switch-on	V5-16	<	3 V
Remote control switch-off current	I4	<	1 mA

**Delivered output signals**

Horizontal drive pulse (loaded with a resistor of  $560 \Omega$  to +12 V peak-to-peak value

	V11-16(p-p)	>	11,6 V
Output current; peak value	I11M	<	40 mA
Saturation voltage of output transistor at $I_{11} = 20$ mA	$V_{CEsat}$	typ.	200 mV
		<	400 mV
at $I_{11} = 40$ mA	$V_{CEsat}$	<	525 mV
Duty factor of output pulse (note 3)	$\delta$	>	0 %
		<	$98 \pm 0,8$ %
Charge current for capacitor on pin 4	I4	typ.	110 $\mu$ A
Charge current for capacitor on pin 5	I5	typ.	120 $\mu$ A
Supply current for reference	I10	typ.	1 mA
			0,6 to 1,45 mA

**Oscillator**

Temperature coefficient		typ.	0,0003 $^{\circ}\text{C}^{-1}$
		<	0,0004 $^{\circ}\text{C}^{-1}$
Relative frequency deviation for V10-16 changing from 5,6 to 6,6 V		typ.	-1,4 %
		<	-2 %
Oscillator frequency spread (with fixed external components)		<	3 %
Frequency control sensitivity at pin 15 $f_{nom} = 15,625$ kHz		typ.	5 kHz/V

**Notes**

1. See application information pin 4.
2. See application information pin 5.
3. The duty factor is specified as follows:  $\delta = \frac{t_p}{T} \times 100\%$

(see Fig. 2). After switch-on the duty factor rises gradually from 0% to the steady value. The relationship between V8-16 and the duty factor is given in Fig. 7 and the relationship between V12-16 and the duty factor is shown in Fig. 9.




Fig. 2.



**Phase control loop**

Loop gain of APC-system (automatic phase control) \*

typ. 5 kHz/ $\mu$ sCatching range ( $f_{\text{nom}} = 15,625$  kHz) $\Delta f$  > 1300 Hz  
< 2100 HzPhase relation between negative transient of  
sync pulse and middle of flybackt typ. 1  $\mu$ s

Tolerance of phase relation

 $\Delta t \leq \pm 0,4 \mu$ s**PINNING**

- |   |  |
|---|--|
| 1. Phase detector output  | 9. Positive supply                           |
| 2. Flyback pulse position input                                     | 10. Reference input                          |
| 3. Reference frequency input  | 11. Output                                   |
| 4. Re-start count capacitor/remote control input                    | 12. Maximum duty factor adjustment/smoothing |
| 5. Slow start and transfer characteristic for low feedback voltages | 13. Oscillator timing network                |
| 6. Over-current protection input                                    | 14. Reactance stage reference voltage        |
| 7. Over-voltage protection input                                    | 15. Reactance stage input                    |
| 8. Feedback voltage input   | 16. Negative supply (ground)                 |

\* For component values see Fig. 1.

APPLICATION INFORMATION

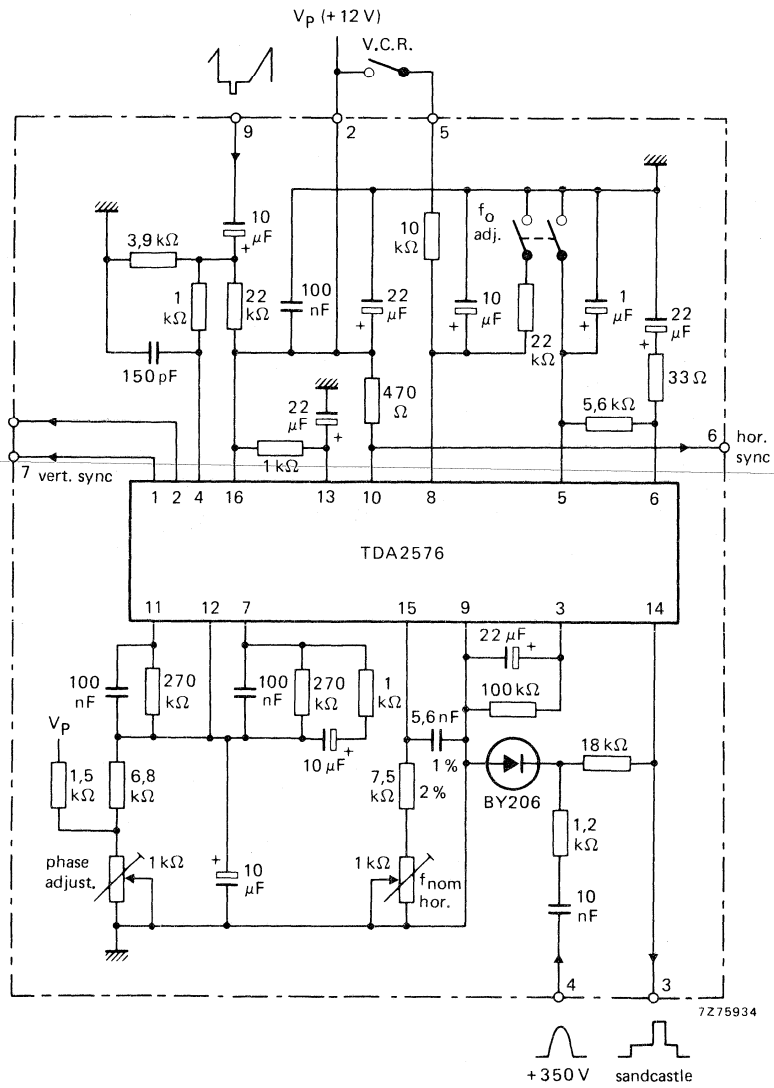


Fig. 3a.

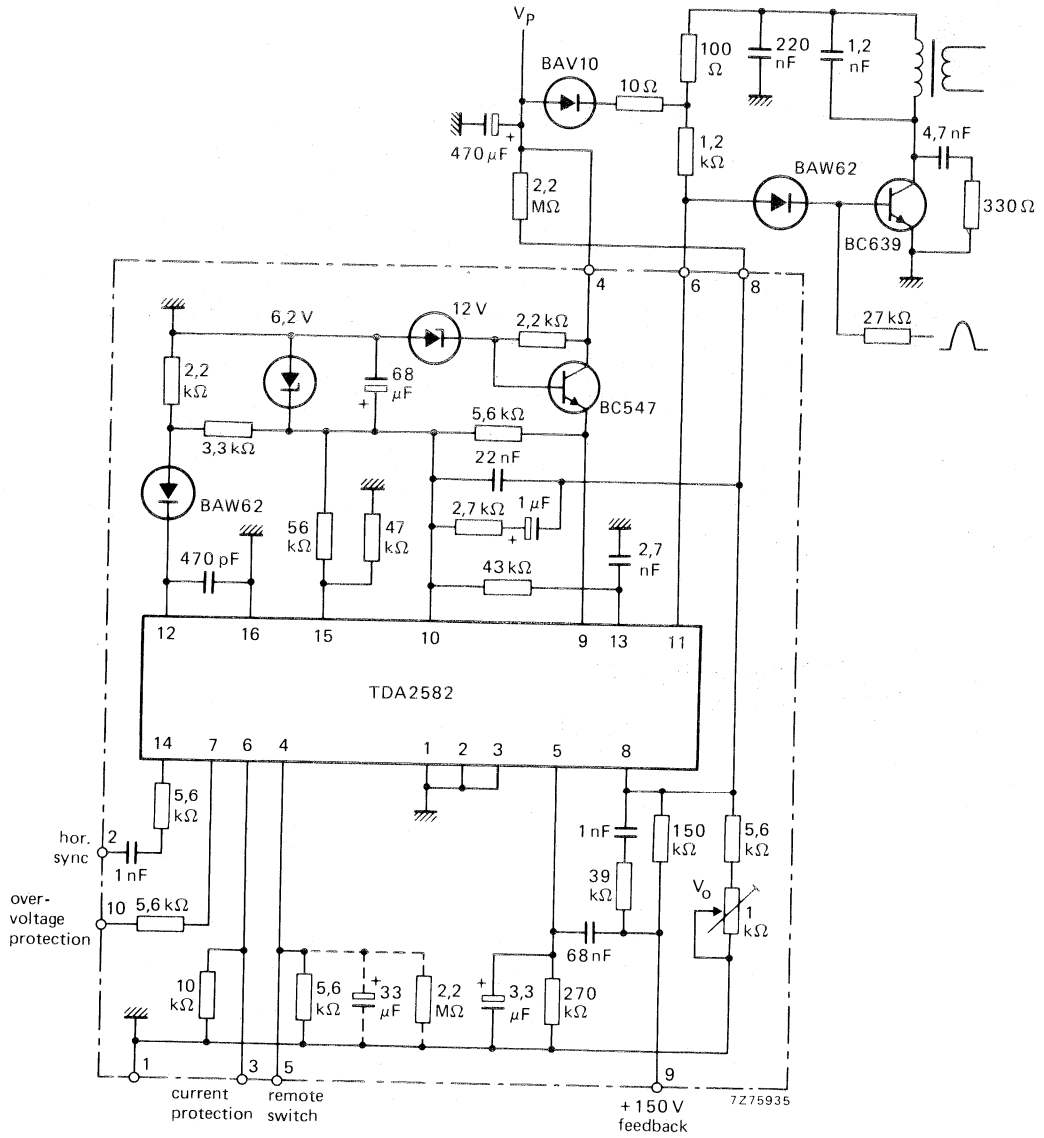


Fig. 3b.

Lead 6 (pin 10) of circuit TDA2576 connected to lead 2 (pin 14) of circuit TDA2582.



The function is described against the corresponding pin number

### 1. Phase detector output

The output circuit consists of a bidirectional current source which is active for the time that the signal on pin 2 exceeds 1 V.

The current values are chosen such that the correct phase relation is obtained when the output signal of the TDA2571 is applied to pin 3.

With a resistor of  $2 \times 33 \text{ k}\Omega$  and a capacitor of 2,7 nF the control steepness is  $0,55 \text{ V}/\mu\text{s}$  (Fig. 4).

### 2. Flyback pulse input

The signal applied to pin 2 is normally a flyback pulse with a duration of about  $12 \mu\text{s}$ . However, the phase detector system also accepts a signal derived by differentiating the deflection current by means of a small toroidal core (pulse duration  $> 3 \mu\text{s}$ ).




Fig. 5a.

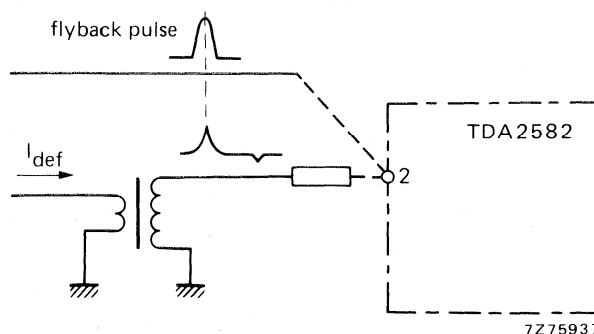


Fig. 5b.

The toroidal transformer in Fig. 5a is for obtaining a pulse representing the mid-flyback from the deflection current. The connection of the picture phase information is shown in Fig. 5b.

### 3. Reference frequency input

The input circuit can be driven directly by the square-wave output voltage from pin 8 of the TDA2571.

The negative-going transient switches the current source connected to pin 1 from positive to negative. The input circuit is made such that a differentiated signal of the square-wave from the TDA2571 is also accepted (this enables mains isolation). The input circuit switching level is about 3 V and the input impedance is about  $8 \text{ k}\Omega$ .

### 4. Re-start count capacitor/remote control input

#### Counting

An external capacitor ( $C4 = 47 \mu\text{F}$ ) is connected between pins 4 and 16. This capacitor controls the characteristics of the protection circuits as follows.

If the protection circuits are required to operate, e.g. over-current at pin 6, the duty factor will be set to zero thus turning off the power supply.

After a short interval (determined by the time constant on pin 5) the power supply will be restarted via the slow start circuit.

If the fault condition has cleared, then normal operation will be resumed. If the fault condition is persistent, the duty factor of the pulses is again reduced to zero and the protection cycle is repeated.

The number of times this action is repeated ( $n$ ) for a persisting fault condition is now determined by:  $n = C4/C5$ .

## APPLICATION INFORMATION (continued)

### *Remote control input*

For this application the capacitor on pin 4 has to be replaced by a resistor with a value between 4,7 and 18 k $\Omega$ . When the externally applied voltage  $V_{4.16} > 5,6$  V, the circuit switches off; switching on occurs when  $V_{4.16} < 4,5$  V and the normal starting-up procedure is followed. Pin 4 is internally connected to an emitter-follower, with an emitter voltage of 1,5 V.

### 5. Slow start and transfer characteristics for low feedback voltages

#### *Slow start*

An external shunt capacitor ( $C5 = 4,7$   $\mu$ F) and resistor ( $R5 = 270$  k $\Omega$ ) are connected between pins 5 and 16. The network controls the rate at which the duty factor increases from zero to its steady-state value after switch-on. It provides protection against surges in the power transistor.

#### *Transfer characteristic for low feedback voltages*

The duty factor transfer characteristic for low feedback voltages can be influenced by R5. The transfer for three different resistor values is given in Fig. 7.

#### *'Smooth' remote ON/OFF*

The ON/OFF information should be applied to pin 5 via a high ohmic resistor, a high OFF-level gives a slow rising voltage at pin 5, which results in a slowly decreasing duty factor.

### 6. Over-current protection input

A voltage proportional to the current in the power switching device is applied to the integrated circuit between pins 6 and 16. The circuit trips on both positive and negative polarity. When the tripping level is reached, the output pulse is immediately blocked and the starting circuit is activated again.

### 7. Over-voltage protection input

When the voltage applied to this pin exceeds the threshold level the protection circuit will operate. The tripping level is about the same as the reference voltage on pin 10.

### 8. Feedback voltage input

The control loop input is applied to pin 8. This pin is internally connected to one input of a differential amplifier, functioning as an amplitude comparator, the other input of which is connected to the reference source on pin 10.

Under normal operating conditions, the voltage on pin 8 will be about equal to the reference voltage on pin 10. For further information refer to the Figs 7 and 8.

### 9. 12 V positive supply

The maximum voltage that may be applied is 14 V. Where this is derived from an unstabilized supply rail, a regulator diode (12 V) should be connected between pins 9 and 16 to ensure that the maximum voltage does not exceed 14 V. When the voltage on this pin falls below a minimum of 8,6 V (typically 9,4 V), the protection circuit will switch-off the power supply.

**10. Reference input**

An external reference diode must be connected between this pin and pin 16. The reference voltage must be between 5,6 and 6,6 V. The IC delivers about 1 mA into the external regulator diode. When the external load on the regulator diode approaches this current, replenishment of the current can be obtained by connecting a suitable resistor between pins 9 and 10. A higher reference voltage value up to 7,5 V is allowed when use is made of a duty factor limiting resistor  $< 27 \text{ k}\Omega$  between pins 12 and 16.

**11. Output**

An external resistor determines the output current fed into the base of the driver transistor. The output circuit uses an n-p-n transistor with 3 series-connected clamping diodes to the internal 12 V supply rail. This provides a low impedance in the "ON" state, that is with the drive transistor turned-off.

**12. Maximum duty factor adjustment/smoothing***Maximum duty factor adjustment*

Pin 12 is connected to the output voltage of the amplitude comparator ( $V_{10-8}$ ). This voltage is internally connected to one input of a differential amplifier, the other input of which is connected to the sawtooth voltage of the horizontal oscillator. A high voltage on pin 12 results in a low duty factor. This enables the maximum duty factor to be adjusted by limiting the voltage by connecting pin 12 to the emitter of an n-p-n transistor used as a voltage source.

Fig. 9 plots the maximum duty factor as a function of the voltage applied to pin 12. If some spread is acceptable the maximum duty factor can also be limited by connecting a resistor from pin 12 to pin 16. A resistor of  $12 \text{ k}\Omega$  limits the maximum duty factor to about 50%. This application also reduces the total IC gain.

*Smoothing*

Any double pulsing of the IC due to circuit layout can be suppressed by connecting a capacitor of about  $470 \text{ pF}$  between pins 12 and 16.

**13. Oscillator timing network**

The timing network comprises a capacitor between pins 13 and 16, and a resistor between pin 13 and the reference voltage on pin 10.

The charging current for the capacitor (C13) is derived from the voltage reference diode connected to pin 10 and discharged via an internal resistor of about  $330 \Omega$ .

**14. Reactance stage reference voltage**

This pin is connected to an emitter follower which determines the nominal reference voltage for the reactance stage ( $1,4 \text{ V}$  for reference voltage  $V_{10-16} = 6,1 \text{ V}$ ). Free-running frequency is obtained when pins 14 and 15 are short-circuited.

**15. Reactance stage input**

The output voltage of the phase detector (pin 1) is connected to pin 15 via a resistor. The voltage applied to pin 15 shifts the upper level of the voltage sensor of the oscillator thus changing the oscillator frequency and phase. The time constant network is connected between 14 and 15. Control sensitivity is typically  $5 \text{ kHz/V}$ .

**16. Negative supply (ground)**

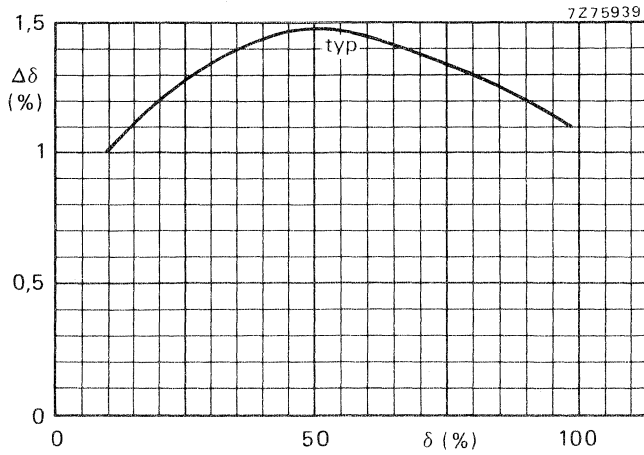


Fig. 6 Duty factor change as a function of initial duty factor; at 1 mV error amplifier input change;  $\Delta V_{8-10(p-p)} = 1$  mV.

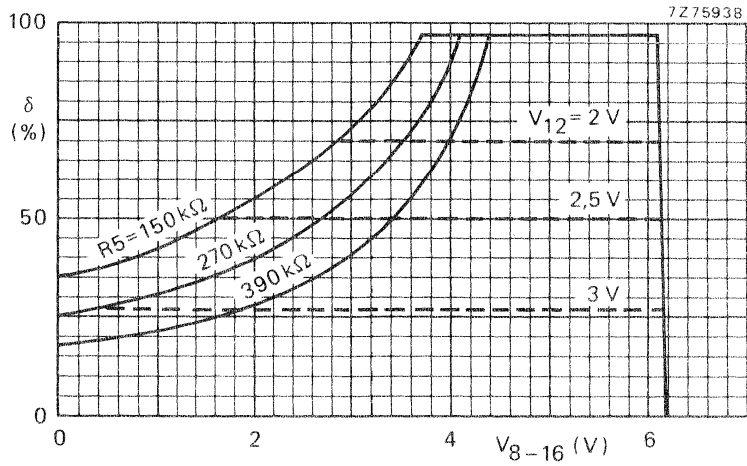


Fig. 7 Duty factor of output pulses as a function of feedback input voltage ( $V_{8-16}$ ) with  $R_5$  as a parameter and  $V_{12-16}$  as a limiting value;  $V_{10-16} = 6,1$  V.



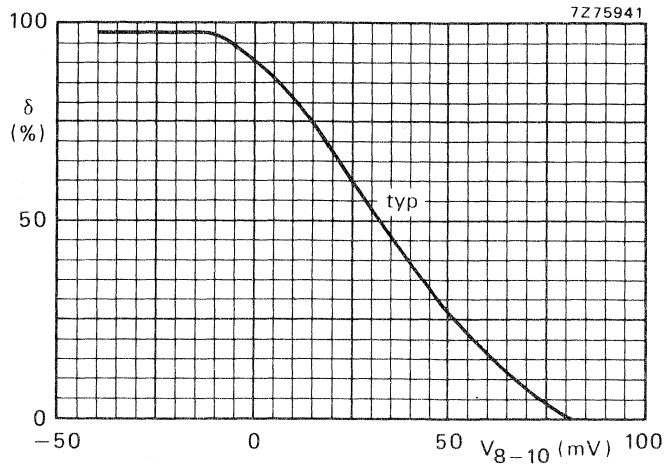


Fig. 8 Duty factor of output pulses as a function of error amplifier input ( $V_{g-10}$ );  $V_{10-16} = 6,1$  V.

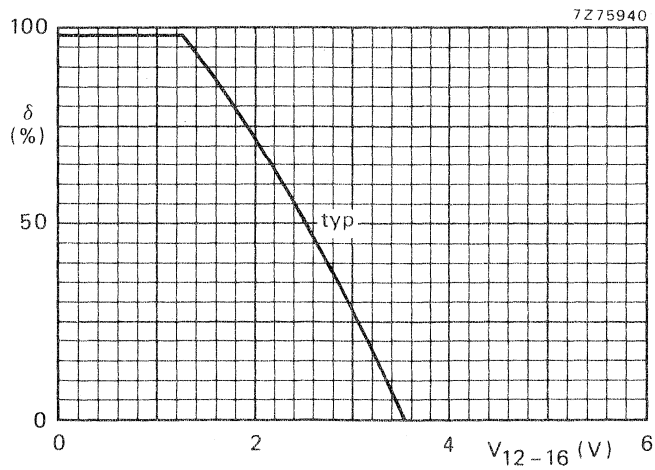


Fig. 9 Maximum duty factor limitation as a function of the voltage applied to pin 12;  $V_{10-16} = 6,1$  V.



## HORIZONTAL COMBINATION

The TDA2593 is a monolithic integrated circuit intended for use in colour television receivers in combination with TDA2510, TDA2520, TDA2560 as well as with TDA3500, TDA3510 and TDA3520. The circuit incorporates the following functions:

- horizontal oscillator based on the threshold switching principle
- phase comparison between sync pulse and oscillator voltage ( $\varphi_1$ )
- internal key pulse for phase detector ( $\varphi_1$ ) (additional noise limiting)
- phase comparison between line flyback pulse and oscillator voltage ( $\varphi_2$ )
- larger catching range obtained by coincidence detector ( $\varphi_3$ ; between sync and key pulse)
- switch for changing the filter characteristic and the gate circuit (VCR-operation)
- sync separator
- noise separator
- vertical sync separator and output stage
- colour burst keying and line flyback blanking pulse generator
- phase shifter for the output pulse
- output pulse duration switching
- output stage with separate supply voltage for direct drive of thyristor deflection circuits
- low supply voltage protection

### QUICK REFERENCE DATA

Supply voltage	V <sub>1-16</sub>	typ.	12 V
Supply current	I <sub>1</sub>	typ.	30 mA
<b>Input signals</b>			
Sync separator input voltage (peak-to-peak value)	V <sub>9-16(p-p)</sub>		3 to 4 V
Noise separator input voltage (peak-to-peak value)	V <sub>10-16(p-p)</sub>		3 to 4 V
Pulse duration switch input voltage			
at t = 7 $\mu$ s (thyristor driving)	V <sub>4-16</sub>		9,4 to V <sub>1-16</sub> V
at t = 14 $\mu$ s + t <sub>d</sub> (transistor driving)	V <sub>4-16</sub>		0 to 3,5 V
at t = 0 (input 4 open or V <sub>3-16</sub> = 0)	V <sub>4-16</sub>		5,4 to 6,6 V
<b>Output signals</b>			
Vertical sync output pulse (peak-to-peak value)	V <sub>8-16(p-p)</sub>	typ.	11 V
Burst gating output pulse (peak-to-peak value)	V <sub>7-16(p-p)</sub>	typ.	11 V
Line drive pulse (peak-to-peak value)	V <sub>3-16(p-p)</sub>	typ.	10,5 V

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage			
at pin 1 (voltage source)	$V_{1-16}$	max.	13,2 V
at pin 2	$V_{2-16}$	max.	18 V
Voltages			
Pin 4	$V_{4-16}$	max.	13,2 V
Pin 9	$\pm V_{9-16}$	max.	6 V
Pin 10	$\pm V_{10-16}$	max.	6 V
Pin 11	$V_{11-16}$	max.	13,2 V
Currents			
Pins 2 and 3 (thyristor driving) (peak value)	$I_{2M}, -I_{3M}$	max.	650 mA
Pins 2 and 3 (transistor driving) (peak value)	$I_{2M}, -I_{3M}$	max.	400 mA
Pin 4	$I_4$	max.	1 mA
Pin 6	$\pm I_6$	max.	10 mA
Pin 7	$-I_7$	max.	10 mA
Pin 11	$I_{11}$	max.	2 mA
Total power dissipation	$P_{tot}$	max.	800 mW
Storage temperature	$T_{stg}$		-25 to + 125 °C
Operating ambient temperature	$T_{amb}$		0 to + 70 °C

**CHARACTERISTICS** at  $V_{1-16} = 12$  V;  $T_{amb} = 25$  °C; measured in Fig. 1**Sync separator**

Input switching voltage	$V_{9-16}$	typ.	0,8 V
Input keying current	$I_g$		5 to 100 $\mu$ A
Input leakage current at $V_{9-16} = -5$ V	$I_g$	<	1 $\mu$ A
Input switching current	$I_g$	$\leq$	5 $\mu$ A
Switch off current	$I_g$	>	100 $\mu$ A
		typ.	150 $\mu$ A
Input signal (peak-to-peak value)	$V_{9-16}(p-p)$		3 to 4 V*

\* Permissible range 1 to 7 V.

**Noise separator**

Input switching voltage	$V_{10-16}$	typ.	1,4 V
Input keying current	$I_{10}$		5 to 100 $\mu\text{A}$
Input switching current	$I_{10}$	>	100 $\mu\text{A}$
		typ.	150 $\mu\text{A}$
Input leakage current at $V_{10-16} = -5 \text{ V}$	$I_{10}$	<	1 $\mu\text{A}$
Input signal (peak-to-peak value)	$V_{10-16(p-p)}$		3 to 4 V*
Permissible superimposed noise signal (peak-to-peak value)	$V_{10-16(p-p)}$	<	7 V

**Line flyback pulse**

Input current	$I_6$	typ.	1 mA
			0,02 to 2 mA
Input switching voltage	$V_{6-16}$	typ.	1,4 V
Input limiting voltage	$V_{6-16}$		-0,7 to + 1,4 V

**Switching on VCR**

Input voltage	$V_{11-16}$		0 to 2,5 V
	$V_{11-16}$		9 to $V_{1-16}$ V
Input current	$-I_{11}$	<	200 $\mu\text{A}$
	$I_{11}$	<	2 mA

**Pulse duration switch**For  $t = 7 \mu\text{s}$  (thyristor driving)

input voltage	$V_{4-16}$		9,4 to $V_{1-16}$ V
Input current	$I_4$	>	200 $\mu\text{A}$

For  $t = 14 \mu\text{s} + t_d$  (transistor driving)

Input voltage	$V_{4-16}$		0 to 3,5 V
Input current	$-I_4$	>	200 $\mu\text{A}$

For  $t = 0$ ;  $V_{3-16} = 0$  or input pin 4 open

Input voltage	$V_{4-16}$		5,4 to 6,6 V
Input current	$I_4$	typ.	0 $\mu\text{A}$

\* Permissible range 1 to 7 V.

**Vertical sync pulse** (positive-going)

Output voltage (peak-to-peak value)	$V_{8-16(p-p)}$	>	10 V
		typ.	11 V
Output resistance	$R_8$	typ.	2 k $\Omega$
Delay between leading edge of input and output signal	$t_{on}$	typ.	15 $\mu$ s
Delay between trailing edge of input and output signal	$t_{off}$	typ.	$t_{on}$ $\mu$ s

**Burst gating pulse** (positive-going)

Output voltage (peak-to-peak value)	$V_{7-16(p-p)}$	>	10 V
		typ.	11 V
Output resistance	$R_7$	typ.	70 $\Omega$
Pulse duration; $V_{7-16} = 7$ V	$t_p$	typ.	4 $\mu$ s
			3,7 to 4,3 $\mu$ s
Phase relation between middle of sync pulse at the input and the leading edge of the burst gating pulse; $V_{7-16} = 7$ V	t	typ.	2,65 $\mu$ s
			2,15 to 3,15 $\mu$ s
Output trailing edge current	$I_7$	typ.	2 mA

**Line flyback-blanking pulse** (positive-going)

Output voltage (peak-to-peak value)	$V_{7-16(p-p)}$		4 to 5 V
Output resistance	$R_7$	typ.	70 $\Omega$
Output trailing edge current	$I_7$	typ.	2 mA

**Line drive pulse** (positive-going)

Output voltage (peak-to-peak value)	$V_{3-16(p-p)}$	typ.	10,5 V
Output resistance			
for leading edge of line pulse	$R_3$	typ.	2,5 $\Omega$
for trailing edge of line pulse	$R_3$	typ.	20 $\Omega$
Pulse duration (thyristor driving)		typ.	7 $\mu$ s
$V_{4-16} = 9,4$ to $V_{1-16}$ V	$t_p$		5,5 to 8,5 $\mu$ s
Pulse duration (transistor driving)			
$V_{4-16} = 0$ to 4 V; $t_{fp} = 12$ $\mu$ s	$t_p$		14 + $t_d$ $\mu$ s*
Supply voltage for switching off the output pulse	$V_{1-16}$	typ.	4 V

**Overall phase relation**

Phase relation between middle of sync pulse and the middle of the flyback pulse	t	typ.	2,6 $\mu$ s**
Tolerance of phase relation	$ \Delta t $	<	0,7 $\mu$ s

\*  $t_d$  = switch-off delay of line output stage.\*\* Line flyback pulse duration  $t_{fp} = 12$   $\mu$ s.

The adjustment of the overall phase relation and consequently the leading edge of the line drive pulse occurs automatically by phase control  $\varphi_2$ .

If additional adjustment is applied it can be arranged by current supply at pin 5 such that

$$\Delta I_5 / \Delta t \quad \text{typ.} \quad 30 \mu\text{A}/\mu\text{s}$$

### Oscillator

Threshold voltage low level

$$V_{14-16} \quad \text{typ.} \quad 4,4 \text{ V}$$

Threshold voltage high level

$$V_{14-16} \quad \text{typ.} \quad 7,6 \text{ V}$$

Discharge current

$$\pm I_{14} \quad \text{typ.} \quad 0,47 \text{ mA}$$

Frequency; free running ( $C_{\text{Osc}} = 4,7 \text{ nF}$ ;  
 $R_{\text{Osc}} = 12 \text{ k}\Omega$ )

$$f_o \quad \text{typ.} \quad 15,625 \text{ kHz}$$

Spread of frequency

$$\Delta f_o / f_o < \pm 5 \text{ \%}^*$$

Frequency control sensitivity

$$\Delta f_o / \Delta I_{15} \quad \text{typ.} \quad 31 \text{ Hz}/\mu\text{A}$$

Adjustment range of network in circuit (Fig. 1)

$$\Delta f_o / f_o \quad \text{typ.} \quad \pm 10 \text{ \%}$$

Influence of supply voltage on frequency

$$\frac{\Delta f_o / f_o}{\Delta V / V_{\text{nom}}} < \pm 0,05 \text{ \%}^*$$

Change of frequency when  $V_{1-16}$  drops to 5 V

$$\Delta f_o < \pm 10 \text{ \%}^*$$

Temperature coefficient of oscillator frequency

$$< \pm 10^{-4} \text{ Hz/K}^*$$

### Phase comparison $\varphi_1$

Control voltage range

$$V_{13-16} \quad 3,8 \text{ to } 8,2 \text{ V}$$

Control current (peak value)

$$\pm I_{13M} \quad 1,9 \text{ to } 2,3 \text{ mA}$$

Output leakage current  
at  $V_{13-16} = 4 \text{ to } 8 \text{ V}$

$$I_{13} < 1 \mu\text{A}$$

Output resistance

at  $V_{13-16} = 4 \text{ to } 8 \text{ V}$

at  $V_{13-16} < 3,8 \text{ V}$  or  $> 8,2 \text{ V}$

$$R_{13} \quad \text{high ohmic} \quad **$$

$$R_{13} \quad \text{low ohmic} \quad \blacktriangle$$

Control sensitivity

$$\text{typ.} \quad 2 \text{ kHz}/\mu\text{s}$$

Catching and holding range (82 k $\Omega$  between pins 13 and 15)

$$\Delta f \quad \text{typ.} \quad \pm 780 \text{ Hz}$$

Spread of catching and holding range

$$\Delta(\Delta f) \quad \text{typ.} \quad \pm 10 \text{ \%}^*$$

\* Excluding external component tolerances.

\*\* Current source.

$\blacktriangle$  Emitter follower.



**Phase comparison  $\varphi_2$  and phase shifter**

Control voltage range	$V_{5-16}$		5,4 to 7,6 V
Control current (peak value)	$\pm I_{5M}$	typ.	1 mA
Output resistance			high ohmic *
at $V_{5-16} = 5,4$ to $7,6$ V		typ.	8 k $\Omega$
at $V_{5-16} < 5,4$ V or $> 7,6$ V	$R_5$		
Input leakage current			
$V_{5-16} = 5,4$ to $7,6$ V	$I_5$	<	5 $\mu$ A
Permissible delay between leading edge of output pulse and leading edge of flyback pulse ( $t_{fp} = 12 \mu$ s)	$t_d$	<	15 $\mu$ s
Static control error	$\Delta t/\Delta t_d$	<	0,2 %

**Coincidence detector  $\varphi_3$** 

Output voltage	$V_{11-16}$		0,5 to 6 V
Output current (peak value)			
without coincidence	$I_{11M}$	typ.	0,1 mA
with coincidence	$-I_{11M}$	typ.	0,5 mA

**Time constant switch**

Output voltage	$V_{12-16}$	typ.	6 V
Output current (limited)	$\pm I_{12}$	<	1 mA
Output resistance			
at $V_{11-16} = 2,5$ to $7$ V	$R_{12}$	typ.	0,1 k $\Omega$
at $V_{11-16} < 1,5$ V or $> 9$ V	$R_{12}$	typ.	60 k $\Omega$

**Internal gating pulse**

Pulse duration	$t_p$	typ.	7,5 $\mu$ s
----------------	-------	------	-------------

\* Current source.



## HORIZONTAL COMBINATION

The TDA2594 is a monolithic integrated circuit intended for use in colour television receivers. The circuit incorporates the following functions:

- Horizontal oscillator based on the threshold switching principle.
- Phase comparison between sync pulse and oscillator voltage ( $\varphi_1$ ).
- Internal key pulse for phase detector ( $\varphi_1$ ) (additional noise limiting).
- Phase comparison between line flyback pulse and oscillator voltage ( $\varphi_2$ ).
- Larger catching range obtained by coincidence detector ( $\varphi_3$ ; between sync and key pulse).
- Switch for changing the filter characteristic and the gate circuit (VCR-operation).
- Sync separator.
- Noise separator.
- Vertical sync separator and output stage.
- Colour burst keying and line flyback blanking pulse generator and clamp circuit for vertical blanking.
- Phase shifter for the output pulse.
- Output pulse duration for transistor deflection systems.
- External switching off of the line trigger pulse.
- Output stage with separate supply voltage.
- Low supply voltage protection.
- Transmitter identification and muting circuit, and vertical sync switch-off.

### QUICK REFERENCE DATA

Supply voltage	$V_{1-18} = V_S$	typ. 12 V
Supply current	$I_1$	typ. 30 mA
<b>Input signals</b>		
Sync separator input voltage (peak-to-peak value)	$V_{11-18(p-p)}$	typ. 3 V*
Noise separator input voltage (peak-to-peak value)	$V_{12-18(p-p)}$	typ. 3 V*
Pulse duration switch input voltage		
at $t = 14 \mu s + t_d$ (transistor driving)	$V_{4-18}$	0 to 3,5 V
at $t = 0$ ( $V_{3-18} = 0$ ); input 4 open ( $I_4 = 0$ )	$V_{4-18}$	5,4 to 6,6 V
<b>Output signals</b>		
Vertical sync output pulse (peak-to-peak value)	$V_{8-18(p-p)}$	typ. 11 V
Burst key output pulse (peak-to-peak value)	$V_{7-18(p-p)}$	typ. 11 V
Line drive-pulse (peak-to-peak value)	$V_{3-18(p-p)}$	typ. 10 V

\* Permissible range: 1 to 7 V.

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

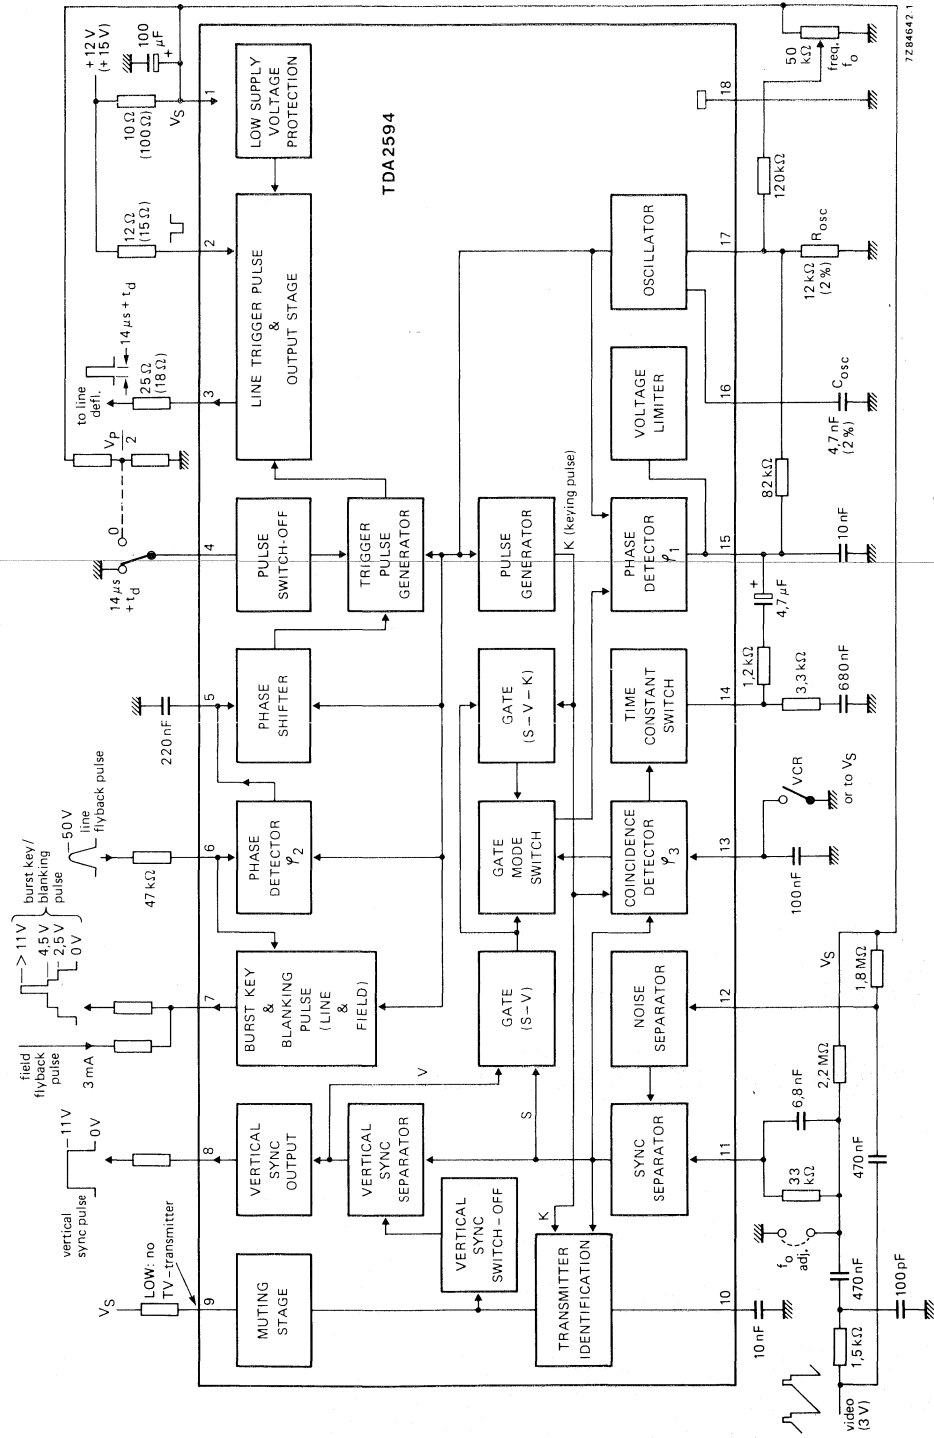


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

## Supply voltage

at pin 1 (voltage source)

 $V_{1-18} = V_S$  max. 13,2 V

at pin 2

 $V_{2-18}$  max. 18 V

## Voltages

Pin 4

 $V_{4-18}$  max. 13,2 V

Pin 9

 $V_{9-18}$  max. 18 V $-V_{9-18}$  max. 0,5 V

Pin 11

 $\pm V_{11-18}$  max. 6 V

Pin 12

 $\pm V_{12-18}$  max. 6 V

Pin 13

 $V_{13-18}$  max. 13,2 V

## Currents

Pins 2 and 3 (transistor driving) (peak value)

 $I_{2M}, -I_{3M}$  max. 400 mA

Pin 4

 $I_4$  max. 1 mA

Pin 6

 $\pm I_6$  max. 10 mA

Pin 7

 $-I_7$  max. 5 mA

Pin 9

 $I_9$  max. 10 mA

Pin 13

 $I_{13}$  max. 2 mA

Total power dissipation

 $P_{tot}$  max. 800 mW

Storage temperature range

 $T_{stg}$  -25 to +125 °C

Operating ambient temperature range

 $T_{amb}$  0 to +70 °C**CHARACTERISTICS** at  $V_{1-18} = 12$  V;  $T_{amb} = 25$  °C; measured in Fig. 1**Sync separator** (pin 11)

Input switching voltage

 $V_{11-18}$  typ. 0,8 V

Input keying current

 $I_{11}$  5 to 100  $\mu$ AInput leakage current at  $V_{11-18} = -5$  V $I_{11} \leq 1$   $\mu$ A

Input switching current

 $I_{11} \leq 5$   $\mu$ A

Switch off current

 $I_{11} \geq 100$   $\mu$ Atyp. 150  $\mu$ A

Input signal (peak-to-peak value)

 $V_{11-18(p-p)}$  3 to 4 V\*

\* Permissible range 1 to 7 V.

**Noise separator (pin 12)**

Input switching voltage	$V_{12-18}$	typ.	1,4 V
Input keying current	$I_{12}$		5 to 100 $\mu\text{A}$
Input switching current	$I_{12}$	$\geq$ typ.	100 $\mu\text{A}$ 150 $\mu\text{A}$
Input leakage current at $V_{12-18} = -5\text{ V}$	$I_{12}$	$\leq$	1 $\mu\text{A}$
Input signal (peak-to-peak value)	$V_{12-18(p-p)}$		3 to 4 V*
Permissible superimposed noise signal (peak-to-peak value)	$V_{12-18(p-p)}$	$\leq$	7 V

**Line flyback pulse (pin 6)**

Input current	$I_6$	$\geq$ typ.	0,02 mA 1 mA
Input switching voltage	$V_{6-18}$	typ.	1,4 V
Input limiting voltage	$V_{6-18}$		-0,7 to +1,4 V

**Switching on VCR (pin 13)**

Input voltage	$V_{13-18}$ or: $V_{13-18}$		0 to 2,5 V 9 to $V_S$ V
Input current	$-I_{13}$ or: $I_{13}$	$\leq$ $\leq$	200 $\mu\text{A}$ 2 mA

**Pulse switching off (pin 4)**

For  $t = 0$ ; input pin 4 open or  $V_{3-18} = 0$

Input voltage	$V_{4-18}$		5,4 to 6,6 V
Input current	$I_4$	typ.	0 $\mu\text{A}$

**Vertical sync pulse (positive-going) (pin 8)**

Output voltage (peak-to-peak value)	$V_{8-18(p-p)}$	$\geq$ typ.	10 V 11 V
Output resistance	$R_8$	typ.	2 $\text{k}\Omega$
Delay between leading edge of input and output signal	$t_{on}$	typ.	15 $\mu\text{s}$
Delay between trailing edge of input and output signal	$t_{off}$	$\geq$	$t_{on}$ $\mu\text{s}$
Switching off the vertical sync pulse	$V_{10-18}$	$\leq$	3 V

**Burst key pulse (positive-going) (pin 7)**

Output voltage	$V_{7-18}$	$\geq$ typ.	10 V 11 V
Output resistance	$R_7$	typ.	70 $\Omega$
Pulse duration; $V_{7-18} = 7\text{ V}$	$t_p$	typ.	4 $\mu\text{s}$ 3,7 to 4,3 $\mu\text{s}$
Phase relation between middle of sync pulse at the input and the leading edge of the burst key pulse; $V_{7-18} = 7\text{ V}$	$t$	typ.	2,65 $\mu\text{s}$ 2,15 to 3,15 $\mu\text{s}$
Output trailing edge current	$I_7$	typ.	2 mA
Saturation voltage during line scan	$V_{7-18}$	$\leq$	1 V

\* Permissible range 1 to 7 V.

**Line flyback-blanking pulse** (positive-going) (pin 7)

Output voltage	V <sub>7-18</sub>		4,1 to 4,9 V
Output resistance	R <sub>7</sub>	typ.	70 Ω
Output trailing edge current	I <sub>7</sub>	typ.	2 mA

**Field flyback/blanking pulse** (pin 7)

Output voltage with externally forced in current I <sub>7</sub> = 2,4 to 3,6 mA	V <sub>7-18</sub>		2 to 3 V
Output resistance at I <sub>7</sub> = 3 mA	R <sub>7</sub>	typ.	70 Ω

**TV-transmitter identification output** (pin 9; open collector)

Output voltage at I <sub>g</sub> = 3 mA; no TV-transmitter	V <sub>9-18</sub>	≤	0,5 V
Output resistance at I <sub>g</sub> = 3 mA; no TV-transmitter	R <sub>g</sub>	≤	100 Ω
Output current at V <sub>10-18</sub> ≥ 3 V; TV-transmitter identified	I <sub>g</sub>	≤	5 μA

**TV-transmitter identification** (pin 10)

When receiving a TV signal the voltage V<sub>10-18</sub> will change from ≤ 1 V to ≥ 7 V.

**Line drive pulse** (positive-going)

Output voltage (peak-to-peak value)	V <sub>3-18(p-p)</sub>	typ.	10 V
Output resistance			
for leading edge of line pulse	R <sub>3</sub>	typ.	2,5 Ω
for trailing edge of line pulse	R <sub>3</sub>	typ.	20 Ω
Pulse duration (transistor driving) V <sub>4-18</sub> = 0 to 3,5 V; -I <sub>4</sub> ≥ 200 μA; t <sub>fp</sub> = 12 μs	t <sub>p</sub>		14 + t <sub>d</sub> μs*
Supply voltage for switching off the output pulse	V <sub>1-18</sub>	typ.	4 V

**Overall phase relation**

Phase relation between middle of sync pulse and the middle of the flyback pulse	Δt	typ.	2,6 ± 0,7 μs**
--	----	------	----------------

The adjustment of the overall phase relation and consequently the leading edge of the line drive pulse occurs automatically by phase control φ<sub>2</sub>.

If additional adjustment is applied it can be arranged by current supply at pin 5, such that:

Supplying current	ΔI/Δt	typ.	30 μA/μs
-------------------	-------	------	----------

\* t<sub>d</sub> = switch-off delay of line output stage.

\*\* Line flyback pulse duration t<sub>fp</sub> = 12 μs.

**Oscillator** (pins 16 and 17)

Threshold voltage low level	$V_{16-18}$	typ.	4,4 V
Threshold voltage high level	$V_{16-18}$	typ.	7,6 V
Charging current	$\pm I_{16}$	typ.	0,47 mA
Frequency; free running ( $C_{OSC} = 4,7 \text{ nF}$ ; $R_{OSC} = 12 \text{ k}\Omega$ )	$f_o$	typ.	15,625 kHz
Spread of frequency	$\Delta f_o$	$\leq$	$\pm 5 \text{ \%}^\Delta$
Frequency control sensitivity	$\Delta f_o / \Delta 17$	typ.	31 Hz/ $\mu\text{A}$
Adjustment range of network in circuit (Fig. 1)	$\Delta f_o$	typ.	$\pm 10 \text{ \%}$
Influence of supply voltage on frequency; reference at $V_S = 12 \text{ V}$	$\frac{\Delta f_o / f_o}{\Delta V / V_{nom}}$	$\leq$	$\pm 0,05 \text{ \%}^\Delta$
Change of frequency when $V_S$ drops to 5 V; reference at $V_S = 12 \text{ V}$	$\Delta f_o$	$\leq$	$\pm 10 \text{ \%}^\Delta$
Temperature coefficient of oscillator frequency	TC	$\leq$	$\pm 10^{-4} \text{ K}^{-1} \Delta$

**Phase comparison  $\varphi_1$**  (pin 15)

Control voltage range	$V_{15-18}$		4,1 to 7,9 V
Control current (peak value)	$\pm I_{15M}$		1,8 to 2,2 mA
Output leakage current at $V_{15-18} = 4,3$ to $7,7 \text{ V}$	$I_{15}$	$\leq$	1 $\mu\text{A}$
Output resistance at $V_{15-18} = 4,3$ to $7,7 \text{ V}$ at $V_{15-18} \leq 4,1 \text{ V}$ or $\geq 7,9 \text{ V}$	$R_{13}$ $R_{13}$	high ohmic low ohmic	* **
Control sensitivity		typ.	2 kHz/ $\mu\text{s}$
Catching and holding range (82 k $\Omega$ between pins 15 and 17)	$\Delta f$	typ.	$\pm 680 \text{ Hz}$
Spread of catching and holding range	$\Delta(\Delta f)$	typ.	$\pm 12 \text{ \%}^\Delta$

**Phase comparison  $\varphi_2$  and phase shifter** (pin 5)

Control voltage range	$V_{5-18}$		5,4 to 7,6 V
Control current (peak value)	$\pm I_{5M}$	typ.	1 mA
Output resistance at $V_{5-18} = 5,4$ to $7,6 \text{ V}$	$R_5$	high ohmic	*
Input leakage current at $V_{5-18} = 5,4$ to $7,6 \text{ V}$	$I_5$	$\leq$	5 $\mu\text{A}$
Permissible delay between leading edge of output pulse and leading edge of flyback pulse ( $t_{fp} = 12 \text{ }\mu\text{s}$ )	$t_d$	$\leq$	15,5 $\mu\text{s}$
Static control error	$\Delta t / \Delta t_d$	$\leq$	0,2 %

**Coincidence detector  $\varphi_3$**  (pin 13)

Output voltage	$V_{13-18}$		0,5 to 6 V
Output current (peak value) without coincidence	$I_{13M}$	typ.	0,1 mA
with coincidence	$-I_{13M}$	typ.	0,5 mA

\* Current source.

\*\* Emitter follower.

 $\Delta$  Excluding external component tolerances.



**Time constant switch (pin 14)**

Output voltage	V <sub>14-18</sub>	typ.	6 V
Output current (limited)	±I <sub>14</sub>	typ.	1 mA
Output resistance			
at V <sub>13-18</sub> = 3,5 to 7 V	R <sub>14</sub>	typ.	0,1 kΩ
at V <sub>13-18</sub> ≤ 2,5 V or ≥ 9 V	R <sub>14</sub>	typ.	60 kΩ

**Internal keying pulse**

Pulse duration	t <sub>p</sub>	typ.	7,5 μs
----------------	----------------	------	--------



## HORIZONTAL COMBINATION

### GENERAL DESCRIPTION

The TDA2595 is a monolithic integrated circuit intended for use in colour television receivers.

#### Features

- Positive video input; capacitively coupled (source impedance  $< 200 \Omega$ )
- Adaptive sync separator; slicing level at 50% of sync amplitude
- Internal vertical pulse separator with double slope integrator
- Output stage for vertical sync pulse or composite sync depending on the load; both are switched off at muting
- $\varphi_1$  phase control between horizontal sync and oscillator
- Coincidence detector  $\varphi_3$  for automatic time-constant switching; overruled by the VCR switch
- Time-constant switch between two external time-constants or loop-gain; both controlled by the coincidence detector  $\varphi_3$
- $\varphi_1$  gating pulse controlled by coincidence detector  $\varphi_3$
- Mute circuit depending on TV transmitter identification
- $\varphi_2$  phase control between line flyback and oscillator; the slicing levels for  $\varphi_2$  control and horizontal blanking can be set separately
- Burst keying and horizontal blanking pulse generation, in combination with clamping of the vertical blanking pulse (three-level sandcastle)
- Horizontal drive output with constant duty cycle inhibited by the protection circuit or the supply voltage sensor
- Detector for too low supply voltage
- Protection circuit for switching off the horizontal drive output continuously if the input voltage is below 4 V or higher than 8 V
- Line flyback control causing the horizontal blanking level at the sandcastle output continuously in case of a missing flyback pulse
- Spot-suppressor controlled by the line flyback control

#### QUICK REFERENCE DATA

Supply voltage (pin 15)	$V_{15-5} = V_P$	typ.	12 V
Sync pulse amplitude (positive video)	$V_{i(p-p)}$	min.	50 mV
Horizontal output current	$I_4$	typ.	50 mA

#### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

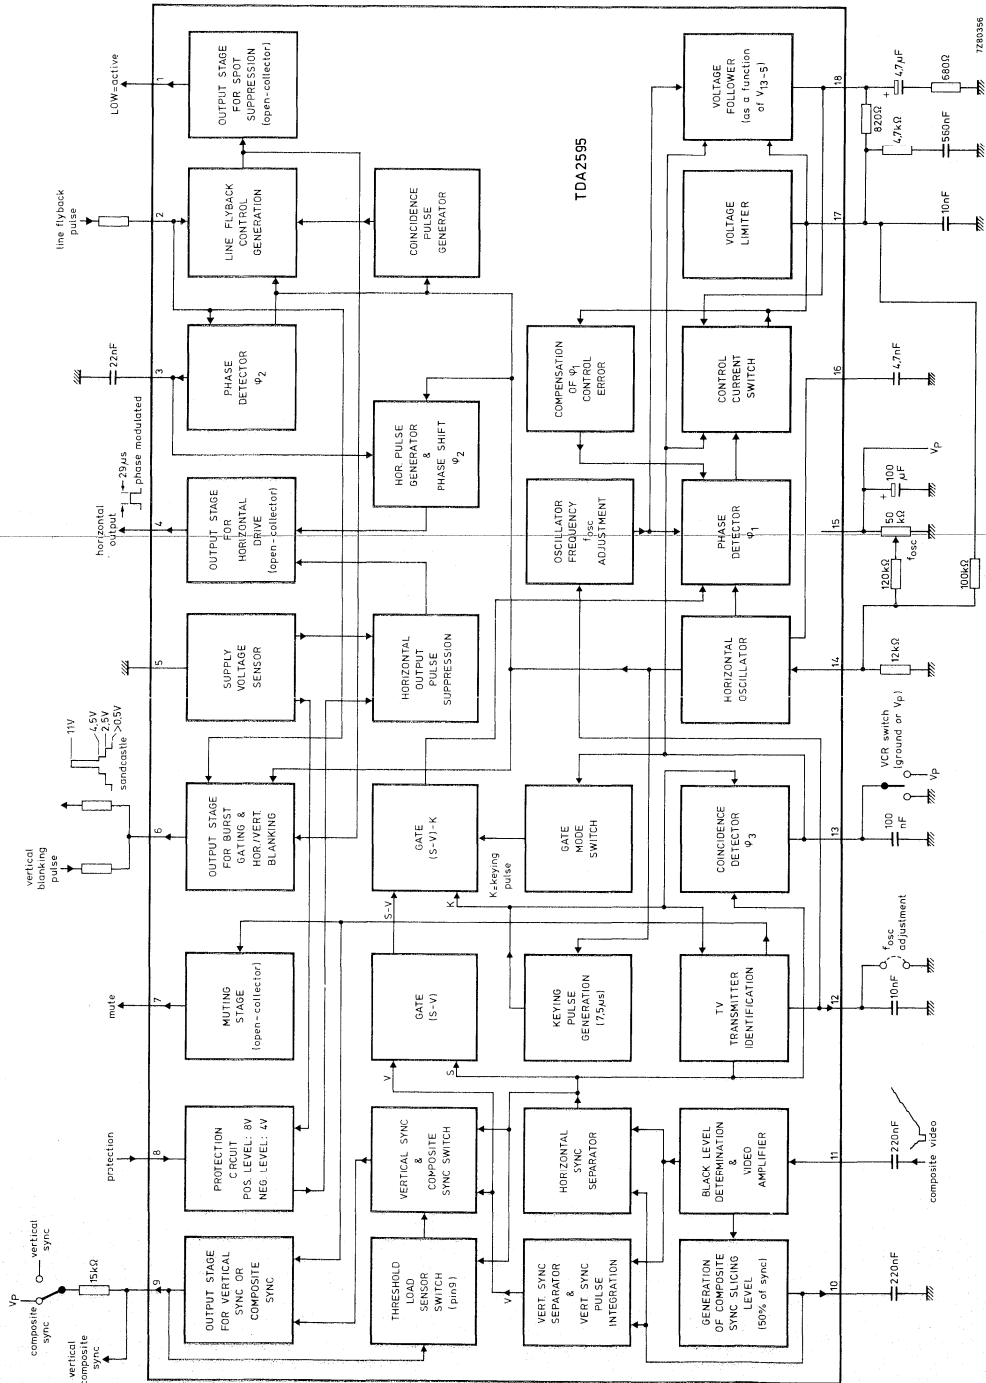


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 15)	$V_{15-5} = V_P$	max.	13,2 V
Voltages at:			
pins 1, 4 and 7	$V_{1;4;7-5}$	max.	18 V
pins 8, 13 and 18	$V_{8;13;18-5}$	max.	$V_P$ V
pin 11 (range)	$V_{11-5}$		-0,5 to + 6 V
Currents at:			
pin 1	$I_1$	max.	10 mA
pin 2 (peak value)	$\pm I_{2M}$	max.	10 mA
pin 4	$I_4$	max.	100 mA
pin 6 (peak value)	$\pm I_{6M}$	max.	6 mA
pin 7	$I_7$	max.	10 mA
pin 8 (range)	$I_8$		-5 to + 1 mA
pin 9 (range)	$I_9$		-10 to + 3 mA
pin 18	$\pm I_{18}$	max.	10 mA
Total power dissipation	$P_{tot}$	max.	800 mW
Storage temperature range	$T_{stg}$		-25 to + 125 °C
Operating ambient temperature range	$T_{amb}$		0 to + 70 °C

## CHARACTERISTICS

$V_P = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in Fig. 1; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Composite video input and sync separator (pin 11)</b> (internal black level determination)					
Input signal (positive video; standard signal; peak-to-peak value)	$V_{11-5(p-p)}$	0,2	1	3	V
Sync pulse amplitude (independent of video content)	$V_{11-5(p-p)}$	50	—	—	mV
Generator resistance	$R_G$	—	—	200	$\Omega$
Input current during:					
video	$I_{11}$	—	5	—	$\mu\text{A}$
sync pulse	$-I_{11}$	—	40	—	$\mu\text{A}$
black level	$-I_{11}$	—	25	—	$\mu\text{A}$
<b>Composite sync generation (pin 10)</b> horizontal slicing level at 50% of the sync pulse amplitude for $V_{11-5(p-p)} < 1,5 \text{ V}$					
Capacitor current during:					
video	$I_{10}$	—	16	—	$\mu\text{A}$
sync pulse	$-I_{10}$	—	170	—	$\mu\text{A}$
<b>Vertical sync pulse generation</b> slicing level at 30% (60% between black level and horizontal slicing level); pin 9					
Output voltage	$V_{9-5}$	10	—	—	V
Pulse duration	$t_p$	—	190	—	$\mu\text{s}$
Delay with respect to the vertical sync pulse (leading edge)	$t_d$	—	45	—	$\mu\text{s}$
Pulse-mode control					
output current for vertical sync pulse (dual integrated)		no current applied at pin 9			
output current for horizontal and vertical sync pulse (non-integrated separated signal)		current applied via a resistor of $15 \text{ k}\Omega$ from $V_P$ to pin 9			

parameter	symbol	min.	typ.	max.	unit
<b>Horizontal oscillator</b> (pins 14 and 16)					
Frequency; free running	$f_{osc}$	—	15 625	—	Hz
Reference voltage for $f_{osc}$	V <sub>14-5</sub>	—	6	—	V
Frequency control sensitivity	$\Delta f_{osc}/\Delta I_{14}$	—	31	—	Hz/ $\mu$ A
Adjustment range of circuit Fig. 1	$\Delta f_{osc}$	—	$\pm 10$	—	%
Spread of frequency	$\Delta f_{osc}$	—	—	5	%
Frequency dependency (excluding tolerance of external components)					
with supply voltage ( $V_P = 12$ V)	$\frac{\Delta f_{osc}/f_{osc}}{\Delta V_{15-5}/V_{15-5}}$	—	$\pm 0,05$	—	
with supply voltage drop of 5 V	$\Delta f_{osc}$	—	—	10	%
with temperature	TC	—	—	$\pm 10^{-4}$	K <sup>-1</sup>
Capacitor current during:					
discharging	+I <sub>16</sub>	—	1024	—	$\mu$ A
charging	-I <sub>16</sub>	—	313	—	$\mu$ A
Sawtooth voltage timing (pin 14)					
rise time	$t_r$	—	49	—	$\mu$ s
fall time	$t_f$	—	15	—	$\mu$ s
<b>Horizontal output pulse</b> (pin 4)					
Output voltage LOW at $I_4 = 50$ mA	V <sub>4-5</sub>	—	—	0,5	V
Pulse duration (HIGH)	$t_p$	—	$29 \pm 1,5$	—	$\mu$ s
Supply voltage for switching off the output pulse (pin 15)	V <sub>P</sub>	—	4	—	V
Hysteresis for switching on the output pulse	$\Delta V_P$	—	250	—	mV

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Phase comparison <math>\varphi_1</math> (pin 17)</b>					
Control voltage range	$V_{17-5}$	3,55	—	8,3	V
Leakage current at $V_{17-5} = 3,55$ to $8,3$ V	$I_{17}$	—	—	1	$\mu A$
Control current for external time-constant switch	$\pm I_{17}$	1,8	2	2,2	mA
Control current at $V_{18-5} = V_{15-5}$ and $V_{13-5} < 2$ V or $V_{13-5} > 9,5$ V	$\pm I_{17}$	—	8	—	mA
Control current at $V_{18-5} = V_{15-5}$ and $V_{13-5} = 2$ to $9,5$ V	$\pm I_{17}$	1,8	2	2,2	mA
Horizontal oscillator control control sensitivity	$S_\varphi$	6	—	—	kHz/ $\mu s$
catching and holding range	$\pm \Delta f_{osc}$	—	680	—	Hz
spread of catching and holding range	$\pm \Delta f_{osc}$	—	10	—	%
Internal keying pulse at $V_{13-5} = 2,9$ to $9,5$ V	$t_p$	—	7,5	—	$\mu s$
Time-constant switch slow time-constant at	$V_{13-5}$	9,5	—	2	V
fast time-constant at	$V_{13-5}$	2	—	9,5	V
Impedance converter offset voltage (slow time-constant)	$\pm V_{17-18}$	—	—	3	mV
Output resistance slow time-constant	$R_{18-5}$	—	—	10	$\Omega$
fast time-constant	$R_{18-5}$	high impedance			
Leakage current	$I_{18}$	—	—	1	$\mu A$



parameter	symbol	min.	typ.	max.	unit
<b>Coincidence detector <math>\varphi_3</math> (pin 13)</b>					
Output voltage					
without coincidence with composite video signal	$V_{13-5}$	—	—	1	V
without coincidence without composite video signal (noise)	$V_{13-5}$	—	—	2	V
with coincidence with composite video signal	$V_{13-5}$	—	6	—	V
Output current					
without coincidence with composite video signal	$I_{13}$	—	50	—	$\mu\text{A}$
with coincidence with composite video signal	$-I_{13}$	—	300	—	$\mu\text{A}$
Switching current					
at $V_{13-5} = V_P - 0,5 \text{ V}$	$I_{13}$	—	—	100	$\mu\text{A}$
at $V_{13-5} = 0,5 \text{ V}$ (average value)	$I_{13(av)}$	—	—	100	$\mu\text{A}$
<b>Phase comparison <math>\varphi_2</math> (pins 2 and 3)</b> (see note 1)					
<b>Input for line flyback pulse (pin 2)</b>					
Switching level for $\varphi_2$ comparison and flyback control					
	$V_{2-5}$	—	3	—	V
Switching level for horizontal blanking					
	$V_{2-5}$	—	0,3	—	V
Input voltage limiting					
	$V_{2-5}$ or:	—	-0,7 +4,5	—	V V
Switching current					
at horizontal flyback	$I_2$	0,01	1	—	mA
at horizontal scan	$I_2$	—	—	2	$\mu\text{A}$
Maximum negative input current					
	$-I_2$	—	—	500	$\mu\text{A}$
<b>Phase detector output (pin 3)</b>					
Control current for $\varphi_2$					
	$\pm I_3$	—	1	—	mA
Control range					
	$\Delta t_{\varphi_2}$	—	19	—	$\mu\text{s}$
Static control error					
	$\Delta t / \Delta t_d$	—	—	0,2	%
Leakage current					
	$I_3$	—	—	5	$\mu\text{A}$

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Phase comparison <math>\varphi_2</math> (pins 2 and 3)</b> (continued)					
Phase relation between middle of the horizontal sync pulse and the middle of the line flyback pulse at $t_{fp} = 12 \mu s$ (note 2)	$\Delta t$	—	$2,6 \pm 0,7$	—	$\mu s$
If additional adjustment is required, it can be arranged by applying a current at pin 3	$\Delta I/\Delta t$	—	30	—	$\mu A/\mu s$
<b>Burst gating pulse (pin 6) (note 3)</b>					
Output voltage	$V_{6-5}$	10	11	—	V
Pulse duration	$t_p$	3,7	4	4,3	$\mu s$
Phase relation between middle of sync pulse at the input and the leading edge of the burst gating pulse at $V_{6-5} = 7 V$	$t_{\varphi 6}$	2,15	2,65	3,15	$\mu s$
Output trailing edge current	$I_6$	—	2	—	mA
<b>Horizontal blanking pulse (pin 6)</b> (note 3)					
Output voltage	$V_{6-5}$	4,1	4,5	4,9	V
Output trailing edge current	$I_6$	—	2	—	mA
Saturation voltage at horizontal scan	$V_{6-5sat}$	—	—	0,5	V
<b>Clamping circuit for vertical blanking pulse (pin 6) (note 3)</b>					
Output voltage at $I_6 = 2,8 mA$	$V_{6-5}$	2,15	2,5	3	V
Minimum output current at $V_{6-5} > 2,15 V$	$I_{6min}$	—	2,3	—	mA
Maximum output current at $V_{6-5} < 3 V$	$I_{6max}$	—	3,3	—	mA
<b>TV-transmitter identification</b> (pin 12) (note 4)					
Output voltage no TV transmitter	$V_{12-5}$	—	—	1	V
TV transmitter identified	$V_{12-5}$	7	—	—	V

parameter	symbol	min.	typ.	max.	unit
<b>Mute output (pin 7)</b>					
Output voltage at $I_7 = 3 \text{ mA}$ no TV transmitter	$V_{7-5}$	—	—	0,5	V
Output resistance at $I_7 = 3 \text{ mA}$ no TV transmitter	$R_{7-5}$	—	—	100	$\Omega$
Output leakage current at $V_{12-5} > 3 \text{ V}$ TV transmitter identified	$I_7$	—	—	5	$\mu\text{A}$
<b>Protection circuit (beam-current/ EHT voltage protection) (pin 8)</b>					
No-load voltage for $I_8 = 0$ (operative condition)	$V_{8-5}$	—	6	—	V
Threshold at positive-going voltage	$V_{8-5}$	—	$8 \pm 0,8$	—	V
Threshold at negative-going voltage	$V_{8-5}$	—	$4 \pm 0,4$	—	V
Current limiting for $V_{8-5} = 1 \text{ to } 8,5 \text{ V}$	$\pm I_8$	—	60	—	$\mu\text{A}$
Input resistance for $V_{8-5} > 8,5 \text{ V}$	$R_{8-5}$	—	3	—	$\text{k}\Omega$
Internal response delay of threshold switch	$t_d$	—	10	—	$\mu\text{s}$
<b>Control output of line flyback pulse control (pin 1)</b>					
Saturation voltage at standard operation; $I_1 = 3 \text{ mA}$	$V_{1-5\text{sat}}$	—	—	0,5	V
Output leakage current in case of disturbance of line flyback pulse	$I_1$	—	—	5	$\mu\text{A}$

**Notes to the characteristics**

1. Phase comparison between horizontal oscillator and the line flyback pulse. Generation of a phase modulated ( $\varphi_2$ ) horizontal output pulse with constant duration.
2.  $t_{fp}$  is the line flyback pulse duration.
3. Three-level sandcastle pulse.
4. If pin 12 is connected to  $V_p$  the vertical output is active independent of synchronization state.



## 5 W AUDIO POWER AMPLIFIER

The TDA2611A is a monolithic integrated circuit in a 9-lead single in-line (SIL) plastic package with a high supply voltage audio amplifier. Special features are:

- possibility for increasing the input impedance
- single in-line (SIL) construction for easy mounting
- very suitable for application in mains-fed apparatus
- extremely low number of external components
- thermal protection
- well defined open loop gain circuitry with simple quiescent current setting and fixed integrated closed loop gain

### QUICK REFERENCE DATA

Supply voltage range	$V_P$		6 to 35 V
Repetitive peak output current	$I_{ORM}$	<	1,5 A
Output power at $d_{tot} = 10\%$			
$V_P = 18\text{ V}; R_L = 8\ \Omega$	$P_O$	typ.	4,5 W
$V_P = 25\text{ V}; R_L = 15\ \Omega$	$P_O$	typ.	5 W
Total harmonic distortion at $P_O < 2\text{ W}; R_L = 8\ \Omega$	$d_{tot}$	typ.	0,3 %
Input impedance	$ Z_i $	typ.	45 k $\Omega$
Total quiescent current at $V_P = 18\text{ V}$	$I_{tot}$	typ.	25 mA
Sensitivity for $P_O = 2,5\text{ W}; R_L = 8\ \Omega$	$V_i$	typ.	55 mV
Operating ambient temperature	$T_{amb}$		-25 to + 150 °C
Storage temperature	$T_{stg}$		-55 to + 150 °C

### PACKAGE OUTLINE

9-lead SIL; plastic (SOT-110B).

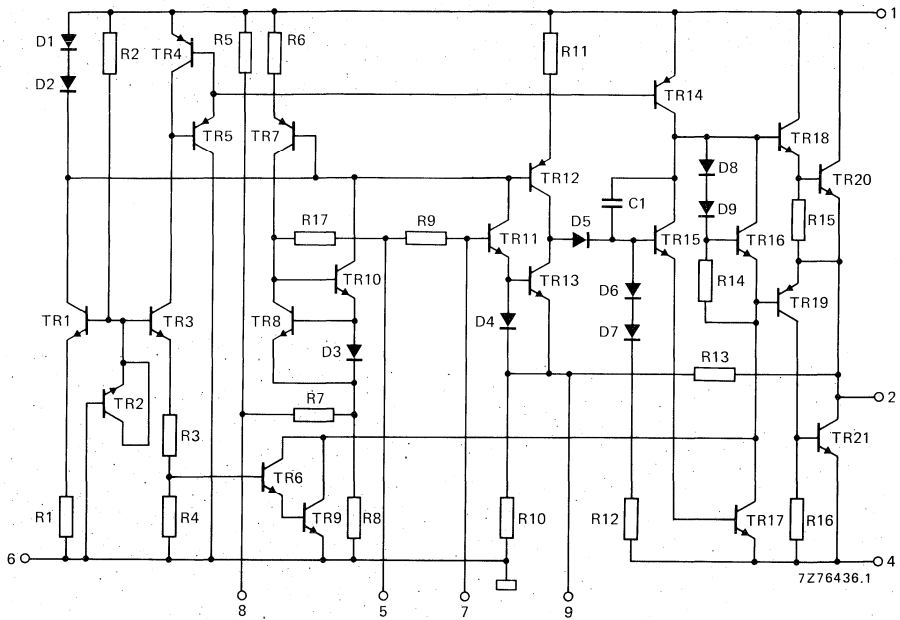


Fig. 1 Circuit diagram; pin 3 not connected.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_P$	max.	35 V
Non-repetitive peak output current	$I_{OSM}$	max.	3 A
Repetitive peak output current	$I_{ORM}$	max.	1,5 A
Total power dissipation	see derating curves Fig. 2		
Storage temperature	$T_{stg}$	-55 to + 150 °C	
Operating ambient temperature	$T_{amb}$	-25 to + 150 °C	

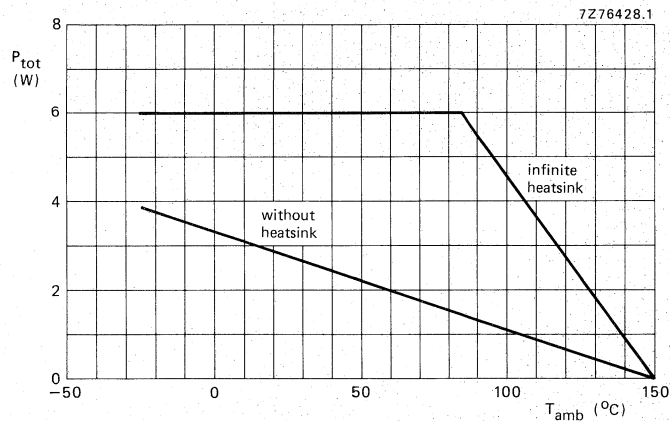


Fig. 2 Power derating curves.

## HEATSINK EXAMPLE

Assume  $V_P = 18$  V;  $R_L = 8$   $\Omega$ ;  $T_{amb} = 60$  °C maximum;  $T_j = 150$  °C (max. for a 4 W application into an 8  $\Omega$  load, the maximum dissipation is about 2,2 W).

The thermal resistance from junction to ambient can be expressed as:

$$R_{th\ j-a} = R_{th\ j-tab} + R_{th\ tab-h} + R_{th\ h-a} = \frac{150 - 60}{2,2} = 41 \text{ K/W.}$$

Since  $R_{th\ j-tab} = 11$  K/W and  $R_{th\ tab-h} = 1$  K/W,  $R_{th\ h-a} = 41 - (11 + 1) = 29$  K/W.

**D.C. CHARACTERISTICS**

Supply voltage range	$V_P$	6 to 35 V
Repetitive peak output current	$I_{ORM}$	< 1,5 A
Total quiescent current at $V_P = 18$ V	$I_{tot}$	typ. 25 mA

**A.C. CHARACTERISTICS**

$T_{amb} = 25$  °C;  $V_P = 18$  V;  $R_L = 8$   $\Omega$ ;  $f = 1$  kHz unless otherwise specified; see also Fig. 3

A.F. output power at  $d_{tot} = 10\%$

$V_P = 18$ V; $R_L = 8$ $\Omega$	$P_o$	> 4 W
		typ. 4,5 W
$V_P = 12$ V; $R_L = 8$ $\Omega$	$P_o$	typ. 1,7 W
$V_P = 8,3$ V; $R_L = 8$ $\Omega$	$P_o$	typ. 0,65 W
$V_P = 20$ V; $R_L = 8$ $\Omega$	$P_o$	typ. 6 W
$V_P = 25$ V; $R_L = 15$ $\Omega$	$P_o$	typ. 5 W

Total harmonic distortion at  $P_o = 2$  W

$d_{tot}$	typ.	0,3 %
	<	1 %

Frequency response

	>	15 kHz
--	---	--------

Input impedance

$ Z_i $	typ.	45 k $\Omega$ *
---------	------	-----------------

Noise output voltage at  $R_S = 5$  k $\Omega$ ;  $B = 60$  Hz to 15 kHz

$V_n$	typ.	0,2 mV
	<	0,5 mV

Sensitivity for  $P_o = 2,5$  W

$V_i$	typ.	55 mV
		44 to 66 mV

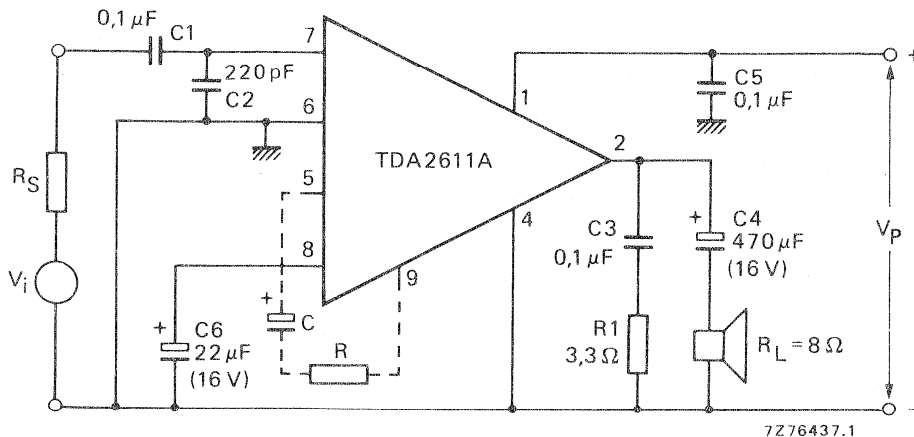


Fig. 3 Test circuit; pin 3 not connected.

\* Input impedance can be increased by applying C and R between pins 5 and 9 (see also Figures 6 and 7).



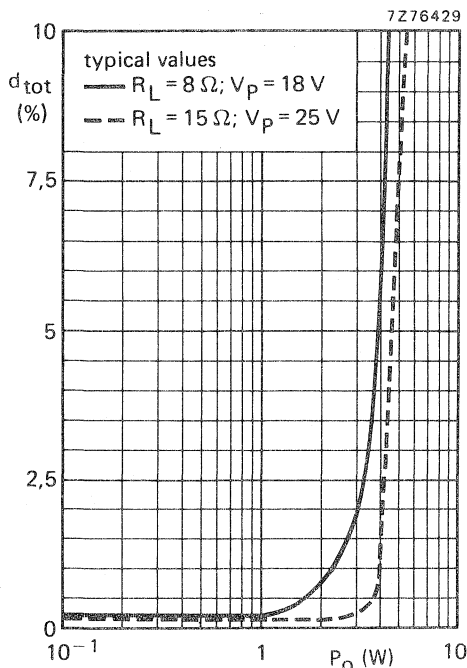


Fig. 4 Total harmonic distortion as a function of output power.

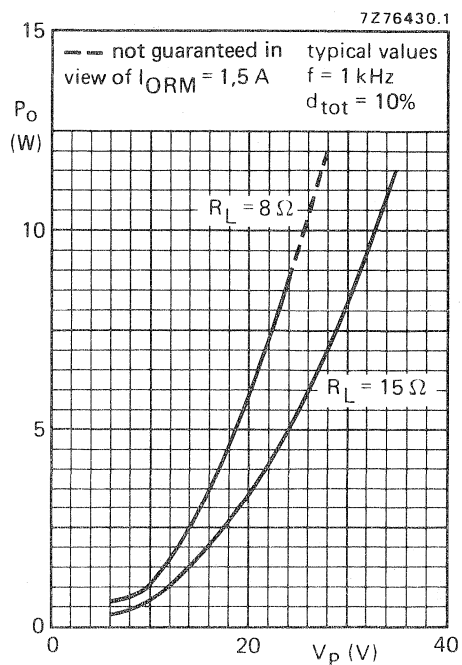


Fig. 5 Output power as a function of supply voltage.

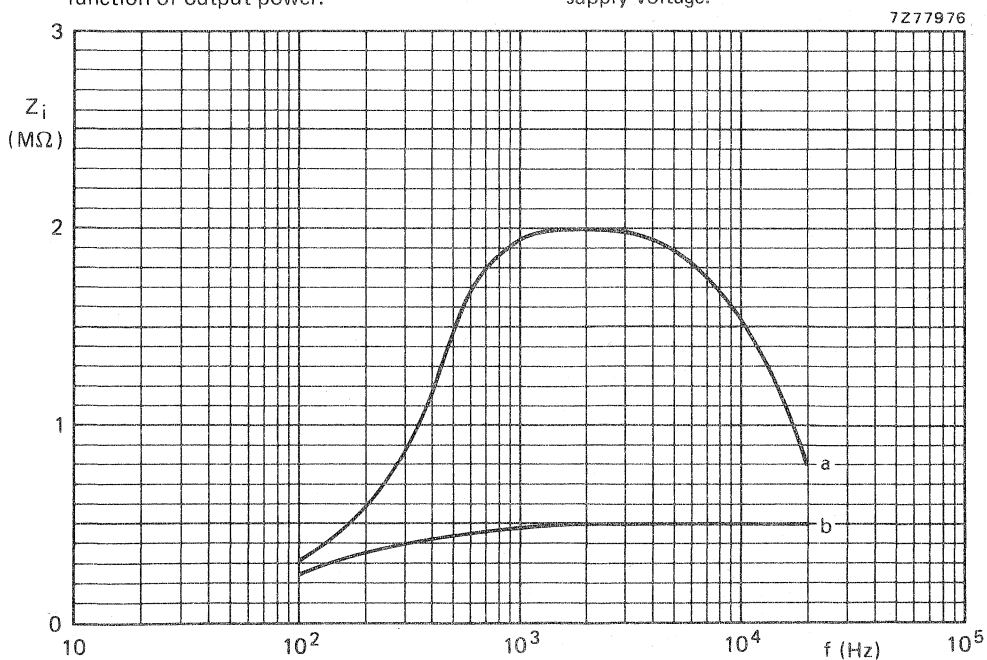


Fig. 6 Input impedance as a function of frequency; curve a for  $C = 1 \mu\text{F}$ ,  $R = 0 \Omega$ ; curve b for  $C = 1 \mu\text{F}$ ,  $R = 1 \text{ k}\Omega$ ; circuit of Fig. 3;  $C_2 = 10 \text{ pF}$ ; typical values.

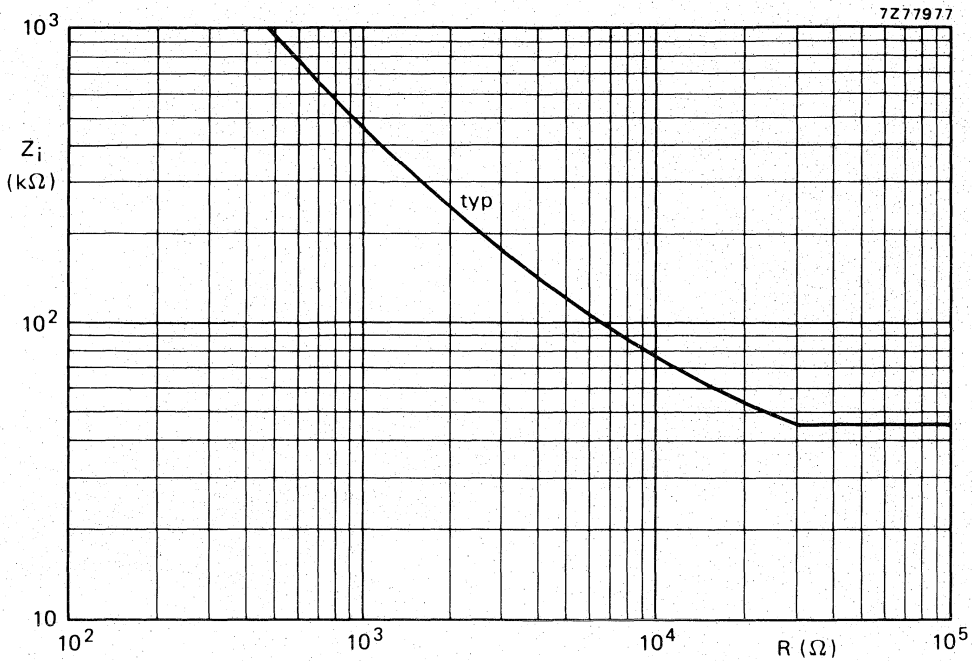


Fig. 7 Input impedance as a function of R in circuit of Fig. 3; C = 1 μF; f = 1 kHz.

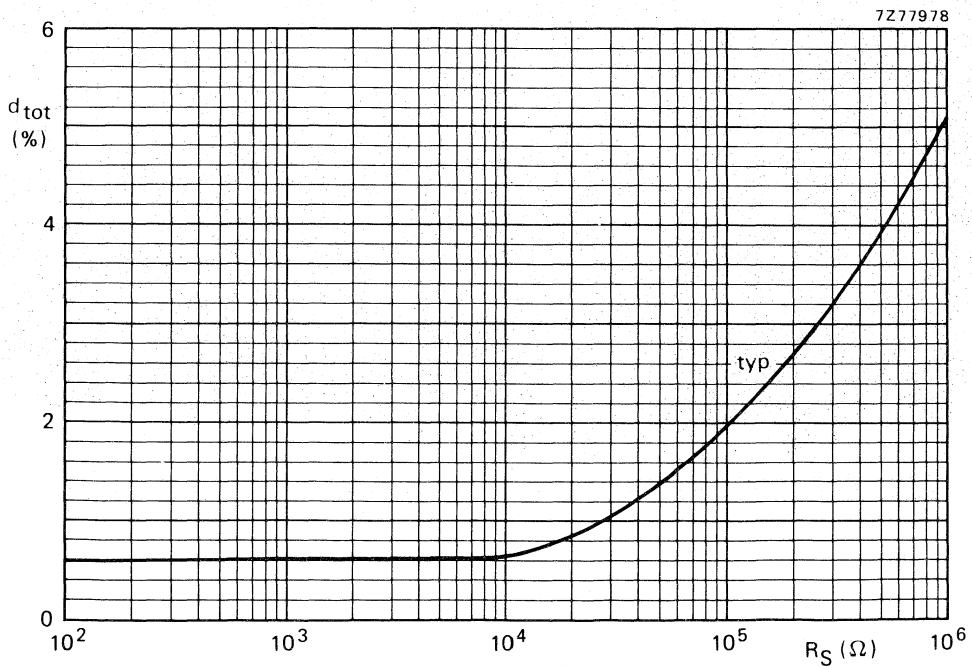


Fig. 8 Total harmonic distortion as a function of R<sub>S</sub> in the circuit of Fig. 3; P<sub>o</sub> = 3,5 W; f = 1 kHz.

7Z76433

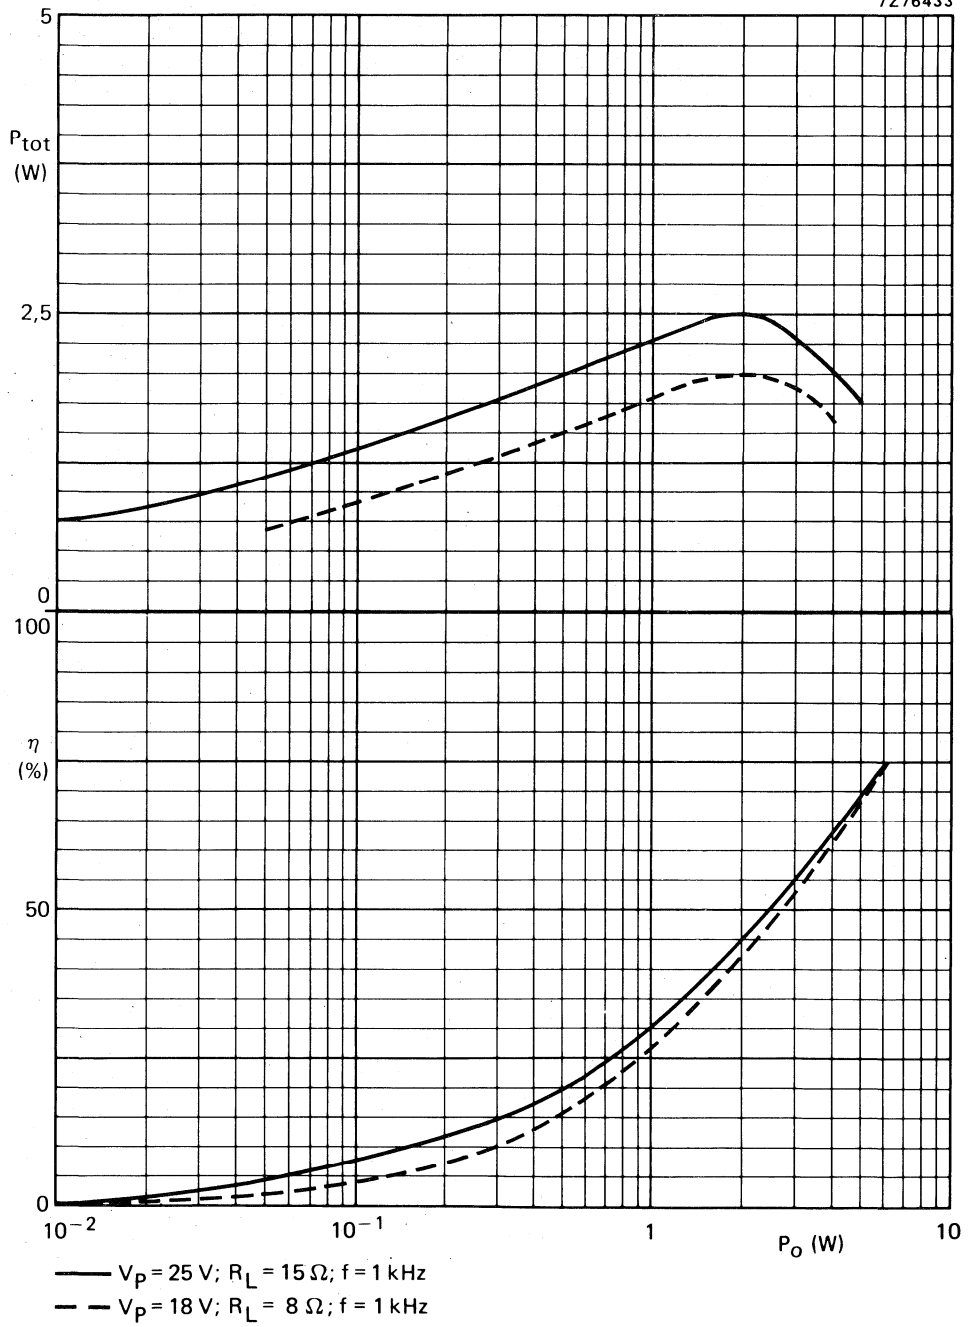


Fig. 9 Total power dissipation and efficiency as a function of output power.

APPLICATION INFORMATION

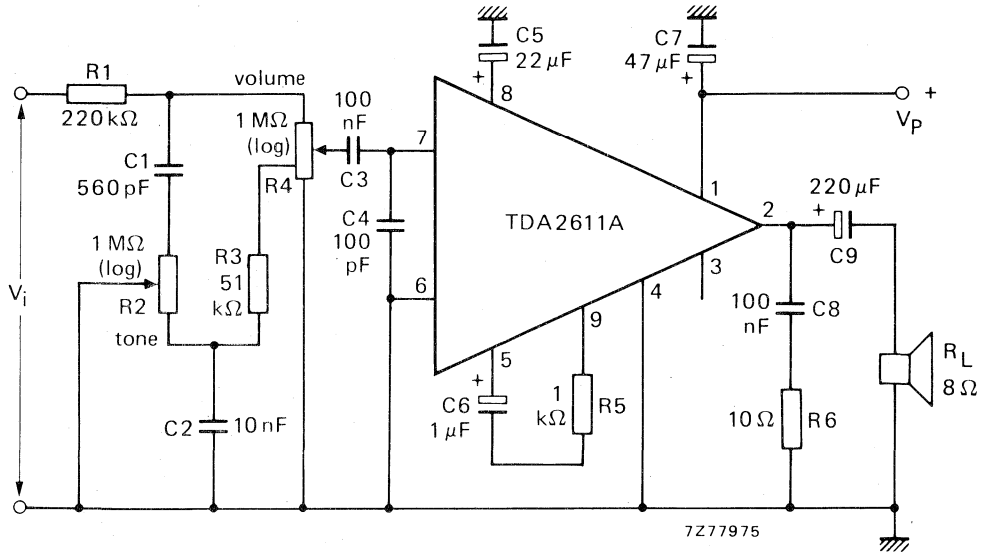


Fig. 10 Ceramic pickup amplifier circuit.

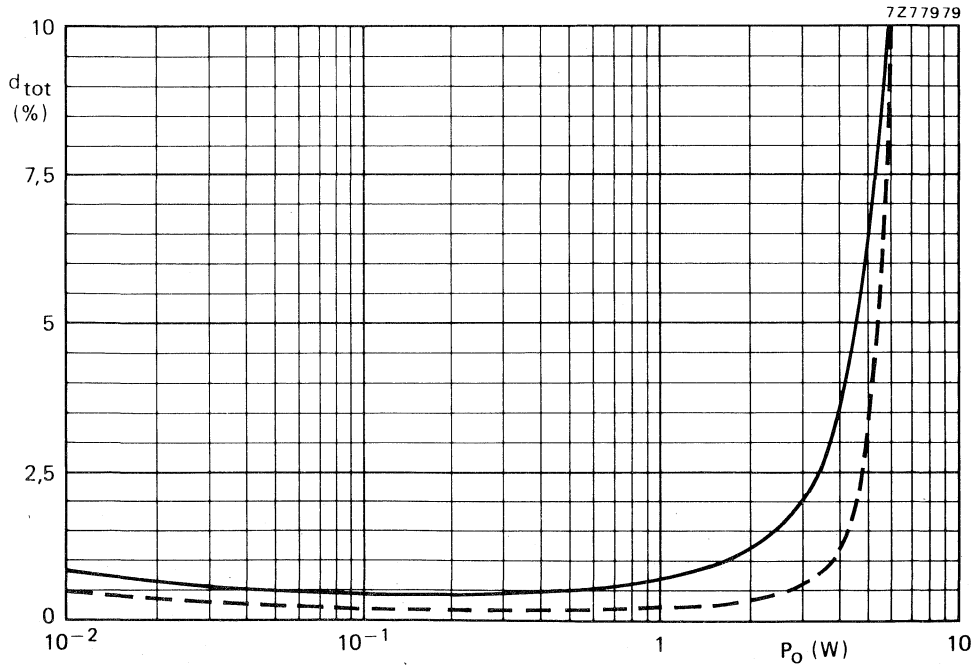


Fig. 11 Total harmonic distortion as a function of output power; — with tone control; - - - without tone control; in circuit of Fig. 10; typical values.

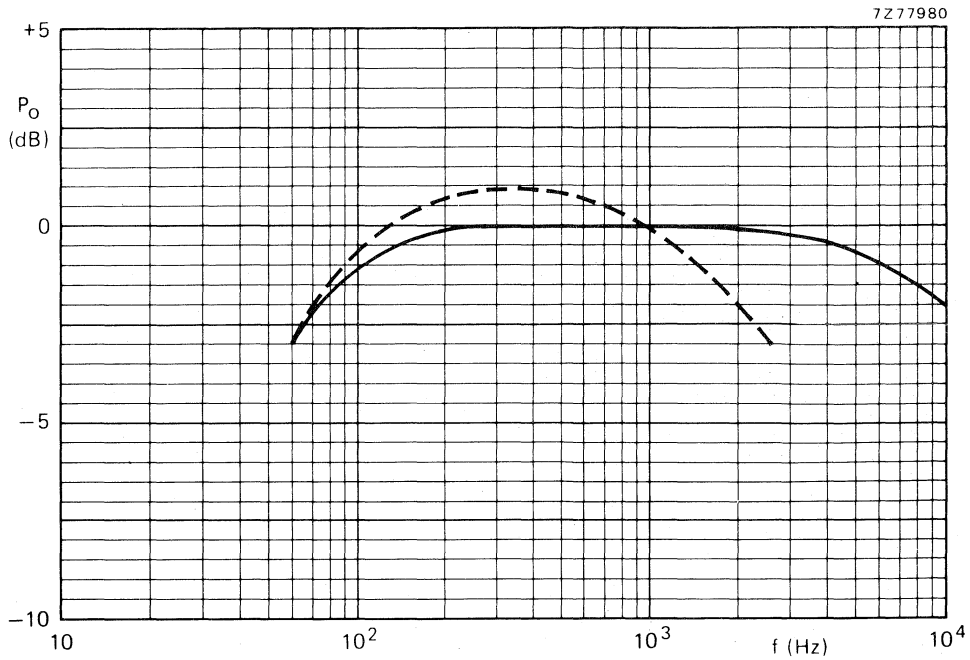


Fig. 12 Frequency characteristics of the circuit of Fig. 10; — tone control max. high; - - - tone control min. high;  $P_O$  relative to 0 dB = 3 W; typical values.

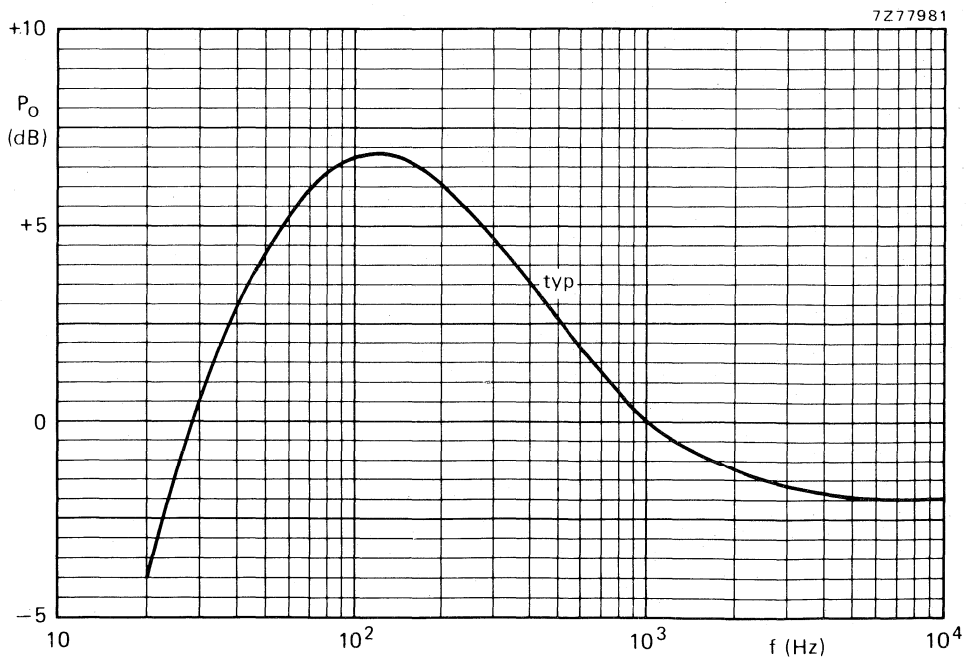


Fig. 13 Frequency characteristic of the circuit of Fig. 10; volume control at the top; tone control max. high.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA2613

## 6 W HI-FI AUDIO POWER AMPLIFIER

### GENERAL DESCRIPTION

The TDA2613 is a hi-fi audio power amplifier encapsulated in a 9-lead SIL plastic power package. The device is especially designed for mains fed applications (e.g. tv and radio).

### Features

- Requires very few external components
- Input muted during power-on and off (no switch-on or switch-off clicks)
- Low offset voltage between output and ground
- Hi-fi according to IEC 268 and DIN 45500
- Short-circuit-proof
- Thermally protected

### QUICK REFERENCE DATA

Supply voltage range	$V_p$		15 to 40 V
Output power at THD = 0,5%, $V_p = 24$ V	$P_o$	typ.	6 W
Voltage gain	$G_v$	typ.	30 dB
Supply voltage ripple rejection	SVRR	typ.	60 dB
Noise output voltage	$V_{no(rms)}$	typ.	70 $\mu$ V

### PACKAGE OUTLINE

TDA2613: 9-lead SIL; plastic power (SOT-110B).

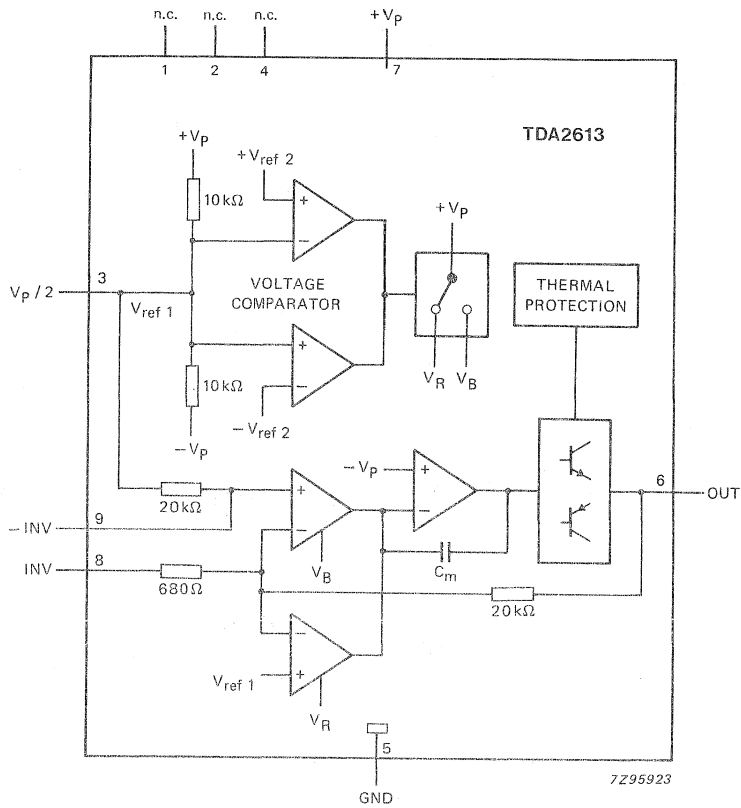


Fig. 1 Block diagram.

**PINNING**

- |            |   |         |  |
|------------|---|---------|--|
| 1. n.c.    | not connected   | 5. GND  | (ground (asymmetrical)<br>negative supply (symmetrical)) |
| 2. n.c.    | not connected   | 6. OUT  | output   |
| 3. $V_p/2$ | ( $\frac{1}{2} V_p$ (asymmetrical)<br>ground (symmetrical)) | 7. +Vp  | positive supply  |
| 4. n.c.    | not connected   | 8. INV  | inverting input  |
|            |   | 9. -INV | non-inverting input                                      |



## FUNCTIONAL DESCRIPTION

This hi-fi power amplifier is designed for mains fed applications. The device is intended for asymmetrical power supplies, but a symmetrical supply may also be used. An output power of 6 watts (THD = 0,5%) can be delivered into an  $8 \Omega$  load with an asymmetrical power supply of 24 V.

The gain is fixed internally at 30 dB. Internal gain fixing gives low gain spread.

A special feature of this device is a mute circuit which suppresses unwanted input signals during switching on and off. Referring to Fig. 4, the  $100 \mu\text{F}$  capacitor creates a time delay when the voltage at pin 3 is lower than an internally fixed reference voltage. During the delay the amplifier remains in the DC operating mode but is isolated from the non-inverting input on pin 9.

Two thermal protection circuits are provided, one monitors the average junction temperature and the other the instantaneous temperature of the power transistors. Both protection circuits activate at  $150^\circ\text{C}$  allowing safe operation to a maximum junction temperature of  $150^\circ\text{C}$  without added distortion.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage		$V_p$	—	40	V
Non-repetitive peak output current		$I_{OSM}$	—	4	A
Total power dissipation	see Fig. 2	$P_{tot}$			
Storage temperature range		$T_{stg}$	-65	+ 150	$^\circ\text{C}$
Junction temperature		$T_j$	—	150	$^\circ\text{C}$
Short-circuit time: outputs short-circuited to ground (full signal drive)	see note	$t_{sc}$	—	1	hour

DEVELOPMENT DATA

### Note to the Ratings

For asymmetrical power supplies (at short-circuiting of the load) the maximum supply voltage is limited to  $V_p = 28 \text{ V}$ . If the total internal resistance of the supply ( $R_S$ )  $\geq 4 \Omega$ , the maximum unloaded supply voltage is increased to 32 V. For symmetrical power supplies the circuit is short-circuit proof to  $V_p = \pm 20 \text{ V}$ .

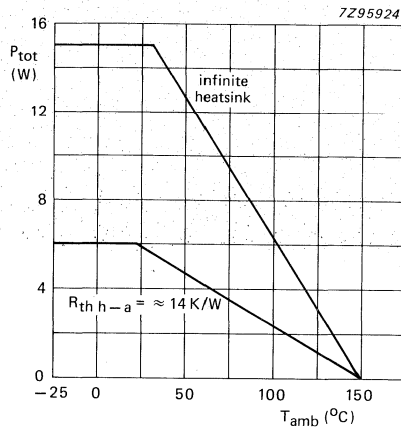


Fig. 2 Power derating curve.

**THERMAL RESISTANCE**

From junction to case

$$R_{th\ j-c} = 8\ K/W$$

**HEATSINK DESIGN EXAMPLE**

With derating of 8 K/W, the value of heatsink thermal resistance is calculated as follows:

given  $R_L = 8\ \Omega$  and  $V_p = 24\ V$ , the measured maximum dissipation is 4,1 W; then, for a maximum ambient temperature of 60 °C, the required thermal resistance of the heatsink is:

$$R_{th\ h-a} = \frac{150 - 60}{4,1} - 8 \approx 14\ K/W$$

Note: The metal tab (heatsink) has the same potential as pin 5 (GND).

## CHARACTERISTICS

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage range		$V_p$	15	24	40	V
operating mode		$V_p$	4	—	10	V
input mute mode						
Repetitive peak output current		$I_{ORM}$	—	—	2,2	A
<b>Operating mode:</b> asymmetrical power supply; test circuit as per Fig. 4; $V_p = 24\text{ V}$ ; $R_L = 8\ \Omega$ ; $T_{amb} = 25\text{ }^\circ\text{C}$ ; $f = 1\text{ kHz}$						
Total quiescent current		$I_{tot}$	10	20	35	mA
Output power	THD = 0,5%	$P_o$	5	6	—	W
	THD = 10%	$P_o$	6,5	8,0	—	W
Total harmonic distortion	$P_o = 4\text{ W}$	THD	—	0,15	0,2	%
Power bandwidth	THD = 0,5%; note 1	B	—	20 to 16 k	—	Hz
Voltage gain		$G_v$	29	30	31	dB
Noise output voltage (r.m.s. value); unweighted (20 Hz to 20 kHz)	$R_S = 2\text{ k}\Omega$	$V_{no(rms)}$	—	70	140	$\mu\text{V}$
Input impedance		$ Z_{i} $	14	20	26	$\text{k}\Omega$
Supply voltage ripple rejection	note 2	SVRR	40	50	—	dB
Input bias current		$I_{ib}$	—	0,3	—	$\mu\text{A}$
DC output offset voltage	with respect to $V_p/2$	$V_{os}$	—	30	200	mV
<b>Input mute mode:</b> asymmetrical power supply; test circuit as per Fig. 4; $V_p = 8\text{ V}$ ; $R_L = 8\ \Omega$ ; $T_{amb} = 25\text{ }^\circ\text{C}$ ; $f = 1\text{ kHz}$						
Total quiescent current		$I_{tot}$	5	15	20	mA
Output voltage	$V_i = 600\text{ mV}$	$V_{out}$	—	0,6	1,8	mV
Noise output voltage (r.m.s. value); unweighted (20 Hz to 20 kHz)	$R_S = 2\text{ k}\Omega$	$V_{no(rms)}$	—	70	140	$\mu\text{V}$
Supply voltage ripple rejection	note 2	SVRR	35	55	—	dB
DC output offset voltage	with respect to $V_p/2$	$V_{os}$	—	40	200	mV

DEVELOPMENT DATA

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Operating mode:</b> symmetrical power supply; test circuit as per Fig. 3; $V_p = \pm 12\text{ V}$ ; $R_L = 8\ \Omega$ ; $T_{amb} = 25\text{ }^\circ\text{C}$ ; $f = 1\text{ kHz}$						
Total quiescent current		$I_{tot}$	10	20	35	mA
Output power	THD = 0,5%	$P_o$	5	6	—	W
	THD = 10%	$P_o$	6,5	8	—	W
Total harmonic distortion	$P_o = 4\text{ W}$	THD	—	0,13	0,2	%
Power bandwidth	THD = 0,5% note 1	B	—	40 to 16 k	—	Hz
Voltage gain		$G_v$	29	30	31	dB
Noise output voltage (r.m.s. value); unweighted (20 Hz to 20 kHz)	$R_S = 2\text{ k}\Omega$	$V_{no(rms)}$	—	70	140	$\mu\text{V}$
Input impedance		$ Z_i $	14	20	26	$\text{k}\Omega$
Supply voltage ripple rejection		SVRR	40	60	—	dB
DC output offset voltage	with respect to ground	$V_{os}$	—	30	200	mV

## Notes to the characteristics

1. Power bandwidth at  $P_o\text{ max}$   $-3\text{ dB}$ .
2. Ripple rejection at  $R_S = 0\ \Omega$ ,  $f = 100\text{ Hz}$  to  $20\text{ kHz}$ ;  
ripple voltage =  $200\text{ mV}$  (r.m.s. value) applied to positive or negative supply rail.

APPLICATION INFORMATION

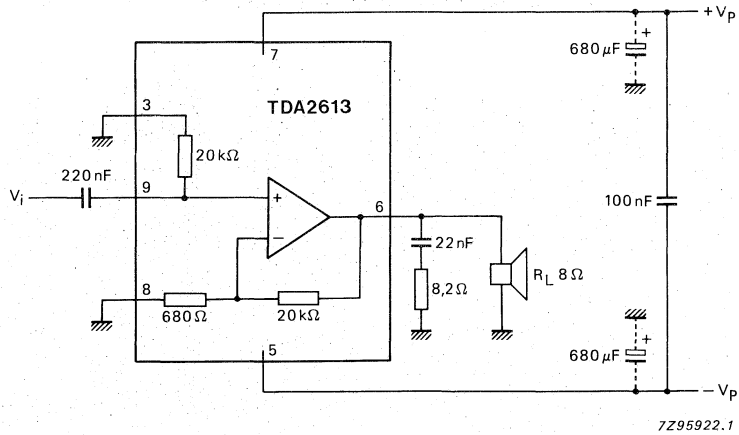


Fig. 3 Test and application circuit; symmetrical power supply.

DEVELOPMENT DATA

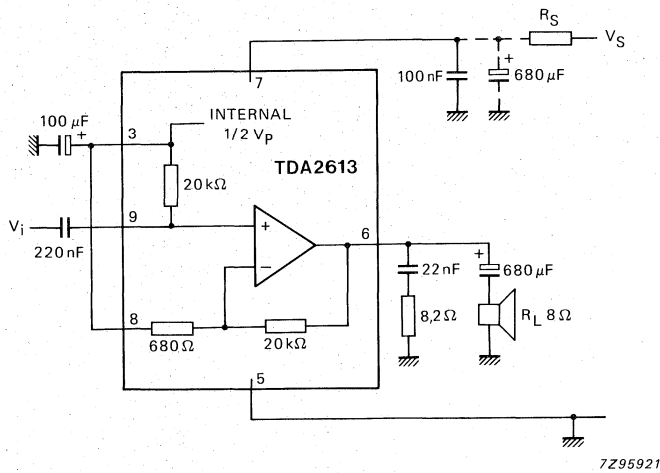


Fig. 4 Test and application circuit; asymmetrical power supply.

**APPLICATION INFORMATION** (continued)**Input mute circuit**

The input mute circuit operates only during switching on and off of the supply voltage. The circuit compares the  $\frac{1}{2}$  supply voltage (at pin 3) with an internally fixed reference voltage ( $V_{ref}$ ), derived directly from the supply voltage. When the voltage at pin 3 is lower than  $V_{ref}$  the non-inverting input (pin 9) is disconnected from the amplifier. The voltage at pin 3 is determined by an internal voltage divider and the external  $100\ \mu\text{F}$  capacitor.

During switching on, a time delay is created between the reference voltage and the voltage at pin 3, during which the input terminal is disconnected, (as illustrated in Fig. 5).

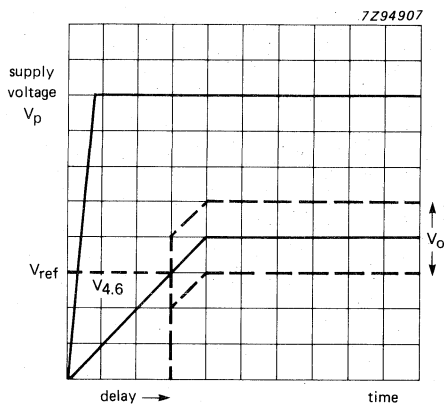


Fig. 5 Input mute circuit; time delay.

## VERTICAL DEFLECTION CIRCUIT

The TDA2653A is a monolithic integrated circuit for vertical deflection in large screen colour television receivers, e.g. 30AX and PIL-S4 systems.

The circuit incorporates the following functions:

- Oscillator; switch capability for 50 Hz/60 Hz operation.
- Synchronization circuit.
- Blanking pulse generator with guard circuit.
- Sawtooth generator with buffer stage.
- Preamplicifier with fed-out inputs.
- Output stage with thermal and short-circuit protection.
- Flyback generator.
- Voltage stabilizer.


### QUICK REFERENCE DATA

For 30AX system

Supply voltage (pin 9)	$V_{9.8} = V_S$	typ.	26 V
Supply current (pin 5 + pin 9)	$I_5 + I_9 = I_S$	typ.	325 mA
Output current (peak-to-peak value)	$I_6(p-p)$	typ.	2,2 A
Picture frequency	f		50 Hz/60 Hz
Sync input pulse (peak-to-peak value)	$V_{2.8}(p-p)$	$\geq$	1 V
Thermal resistance from junction to mounting base	$R_{th j-mb}$	$\leq$	5 K/W

### PACKAGE OUTLINE

13-lead SIL; plastic power (SOT-141B).

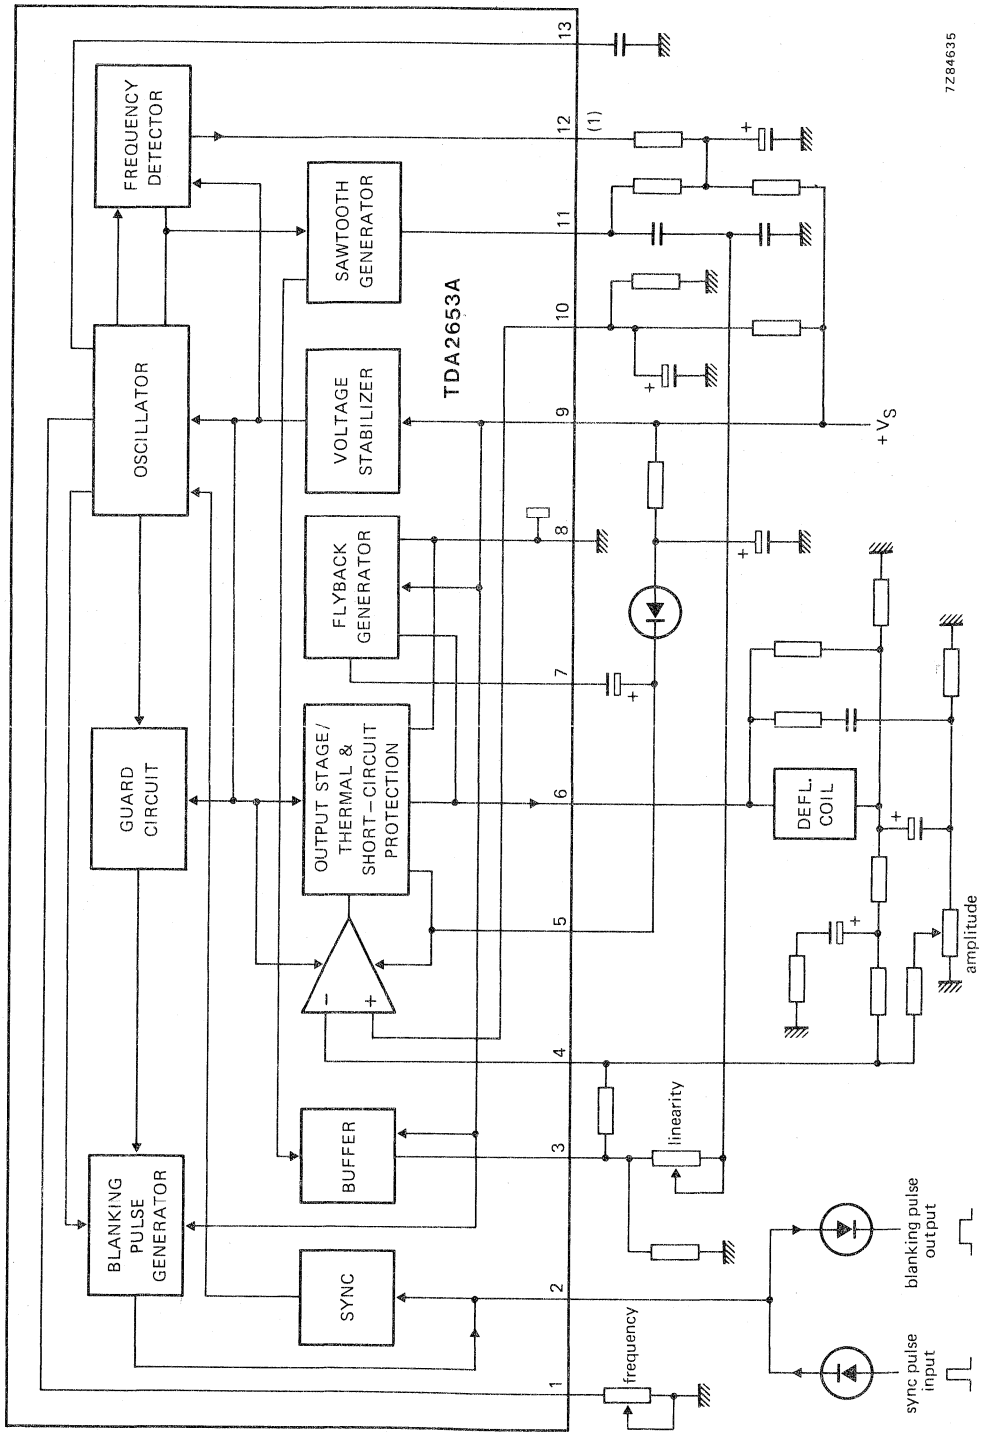

72B4635

(1) Condition for pin 12: LOW voltage level = 50 Hz; HIGH voltage level = 60 Hz.

Fig. 1 Block diagram.



## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 9)	$V_{9-8} = V_S$	max.	40 V
Supply voltage output stage (pin 5)	$V_{5-8}$	max.	58 V
Voltages			
Pin 3	$V_{3-11}$	max.	7 V
Pin 13	$V_{13-8}$	max.	7 V
Pins 4 and 10	$V_{4;10-8}$	max.	24 V
Pin 6	$V_{6-8}$	max.	58 V
	$-V_{6-8}$	max.	0 V
Pins 7 and 11	$V_{7;11-8}$	max.	40 V
Currents			
Pin 1	$I_1$	max.	0 mA
	$-I_1$	max.	1 mA
Pin 2	$\pm I_2$	max.	10 mA
Pin 3	$I_3$	max.	0 mA
	$-I_3$	max.	5 mA
Pin 7	$I_7$	max.	1,2 A
	$-I_7$	max.	1,5 A
Pin 11	$I_{11}$	max.	50 mA
	$-I_{11}$	max.	1 mA
Pin 12	$I_{12}$	max.	3 mA
	$-I_{12}$	max.	0 mA

Pins 5, 6 and 8: internally limited by the short-circuit protection circuit.

Total power dissipation: internally limited by the thermal protection circuit.

Storage temperature range	$T_{stg}$	-25 to +150 °C
Operating ambient temperature range	$T_{amb}$	0 °C to limiting value

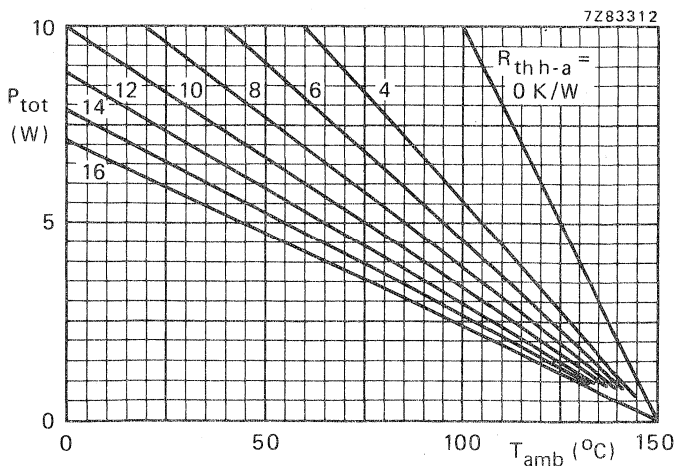


Fig. 2 Total power dissipation.  
 $R_{th\ h-a}$  includes  $R_{th\ mb-h}$   
 which is expected when heat-sink  
 compound is used.  
 $R_{th\ j-mb} \leq 5\text{ K/W}$ .

## CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

## Supply voltage/output stage

Supply voltage	$V_{9-8} = V_S$		9 to 30 V
Output voltage	$V_{6-8}$	$\geq$	$V_{5-8} - 2,2\text{ V}$
at $-I_6 = 1,1\text{ A}$		typ.	$V_{5-8} - 1,9\text{ V}$
			1,3 V
at $I_6 = 1,1\text{ A}$	$V_{6-8}$	$\leq$	1,6 V
Flyback generator output voltage at $-I_6 = 1,1\text{ A}$	$V_{7-8}$	typ.	$V_S - 2,2\text{ V}$
Peak output current	$\pm I_6$	$\leq$	1,2 A
Flyback generator peak current	$\pm I_7$	$\leq$	1,2 A

## Feedback

Input quiescent current	$-I_{4;10}$	typ.	0,1 $\mu\text{A}$
-------------------------	-------------	------	-------------------

## Synchronization

Sync input pulse	$V_{2-8}$		1 to 12 V
Tracking range		typ.	28 %

## Oscillator/sawtooth generator

Oscillator frequency control input voltage	$V_{1-8}$		6 to 9 V
Sawtooth generator output voltage	$V_{3-8}$		0 to $V_S - 1\text{ V}$
	$V_{11-8}$		0 to $V_S - 2\text{ V}$
Sawtooth generator output current	$-I_3$		0 to 4 mA
	$I_{11}$	$\geq$	-2 $\mu\text{A}$
		$\leq$	+30 mA
Oscillator temperature dependency	$(\Delta f/f)/\Delta T_{case}$	typ.	$10^{-4}\text{ K}^{-1}$
$T_{case} = 20\text{ to }100\text{ }^{\circ}\text{C}$			
Oscillator voltage dependency	$(\Delta f/f)/\Delta V_S$	typ.	$4 \times 10^{-4}\text{ V}^{-1}$
$V_S = 10\text{ to }30\text{ V}$			

## Blanking pulse generator

Output voltage	$V_{2-8}$	typ.	18,5 V
at $V_S = 24\text{ V}; I_2 = 1\text{ mA}$			
Output current	$-I_2$	$\leq$	3 mA
Output resistance	$R_{2-8}$	typ.	410 $\Omega$
Blanking pulse duration at 50 Hz sync	$t_b$	typ.	$1,4 \pm 0,07\text{ ms}$

## 50 Hz/60 Hz switch capability

Saturation voltage; LOW voltage level	$V_{12-8}$	typ.	1 V
Output leakage current	$I_{12}$	typ.	1 $\mu\text{A}$

**Thermal resistance/junction temperature**

From junction to mounting base	$R_{th\ j-mb}$	$\leq$	5 K/W
Junction temperature; switching point thermal protection	$T_j$	typ.	$150 \pm 8$ °C

**PINNING**

- |  |                                    |
|--|------------------------------------|
| 1. Oscillator adjustment                 | 8. Ground                          |
| 2. Synchronization input/blanking output | 9. Positive supply ( $V_S$ )       |
| 3. Sawtooth generator output             | 10. Reference voltage              |
| 4. Preamplifier input                    | 11. Sawtooth capacitor             |
| 5. Positive supply of output stage       | 12. 50 Hz/ 60 Hz switching voltage |
| 6. Output                                | 13. Oscillator capacitor           |
| 7. Flyback generator output              |                                    |

**APPLICATION INFORMATION**

The function is described against the corresponding pin number

- 1, 13. Oscillator  
The oscillator frequency is determined by a potentiometer at pin 1 and a capacitor at pin 13.
2. Sync input/blanking output  
Combination of sync input and blanking output. The oscillator has to be synchronized by a positive-going pulse between 1 and 12 V. The integrated frequency detector delivers a switching level at pin 12.  
The blanking pulse amplitude is 20 V with a load of 1 mA.
3. Sawtooth generator output  
The sawtooth signal is fed via a buffer stage to pin 3. It delivers the signal which is used for linearity control, and drive of the preamplifier. The sawtooth is applied via a shaping network to pin 11 (linearity) and via a resistor to pin 4 (preamplifier).
4. Preamplifier input  
The d.c. voltage is proportional to the output voltage (d.c. feedback). The a.c. voltage is proportional to the sum of the buffered sawtooth voltage at pin 3 and the voltage, with opposite polarity, at the feedback resistor (a.c. feedback).
5. Positive supply of output stage  
This supply is obtained from the flyback generator. An electrolytic capacitor between pins 7 and 5, and a diode between pins 5 and 9 have to be connected for proper operation of the flyback generator.
6. Output of class-B power stage  
The vertical deflection coil is connected to this pin, via a series connection of a coupling capacitor and a feedback resistor, to ground.
7. Flyback generator output  
An electrolytic capacitor has to be connected between pins 7 and 5 to complete the flyback generator.
8. Negative supply (ground)  
Negative supply of output stage and small signal part.
9. Positive supply  
The supply voltage at this pin is used to supply the flyback generator, voltage stabilizer, blanking pulse generator and buffer stage.

## APPLICATION INFORMATION (continued)

## 10. Reference voltage of preamplifier

External adjustment and decoupling of reference voltage of the preamplifier.

## 11. Sawtooth capacitor

This sawtooth capacitor has been split to realize linearity control.


## 12. 50 Hz/60 Hz switching level

This pin delivers a LOW voltage level for 50 Hz and a HIGH voltage level for 60 Hz. The amplitudes of the sawtooth signals can be made equal for 50 Hz and 60 Hz with these levels.

The following application data are measured in Figs 3 and 4.

			30AX system (26 V) Fig. 3	30AX system (26 V/12 V) Fig. 4	PIL-S4 system Fig. 3
System supply voltages	$V_{S1}$	typ.	26	26	26 V
	$V_{S2}$	typ.	—	12	— V
System supply currents	$I_{S1}$	typ.	315	330	195 mA
	$I_{S2}$	typ.	—	—35	— mA
Output voltage	$V_{6-8}$	typ.	14	14,6	13,5 V
Output voltage (peak value)	$V_{6-8}$	typ.	42	42	49 V
Deflection current (peak-to-peak value)	$I_{6(p-p)}$	typ.	2,2	2,2	1,32 A
Flyback time	$t_{fl}$	typ.	1	0,9	1,1 ms
Total power dissipation per package	$P_{tot}$	typ.	4,1	4	3 W
		max.	4,8	4,8	3,4 W*
Oscillator frequency unsynchronized	f	typ.	46,5	46,5	46,5 Hz


\* Calculated with  $\Delta V_S = +5\%$  and  $\Delta R_{Yoke} = -7\%$ .

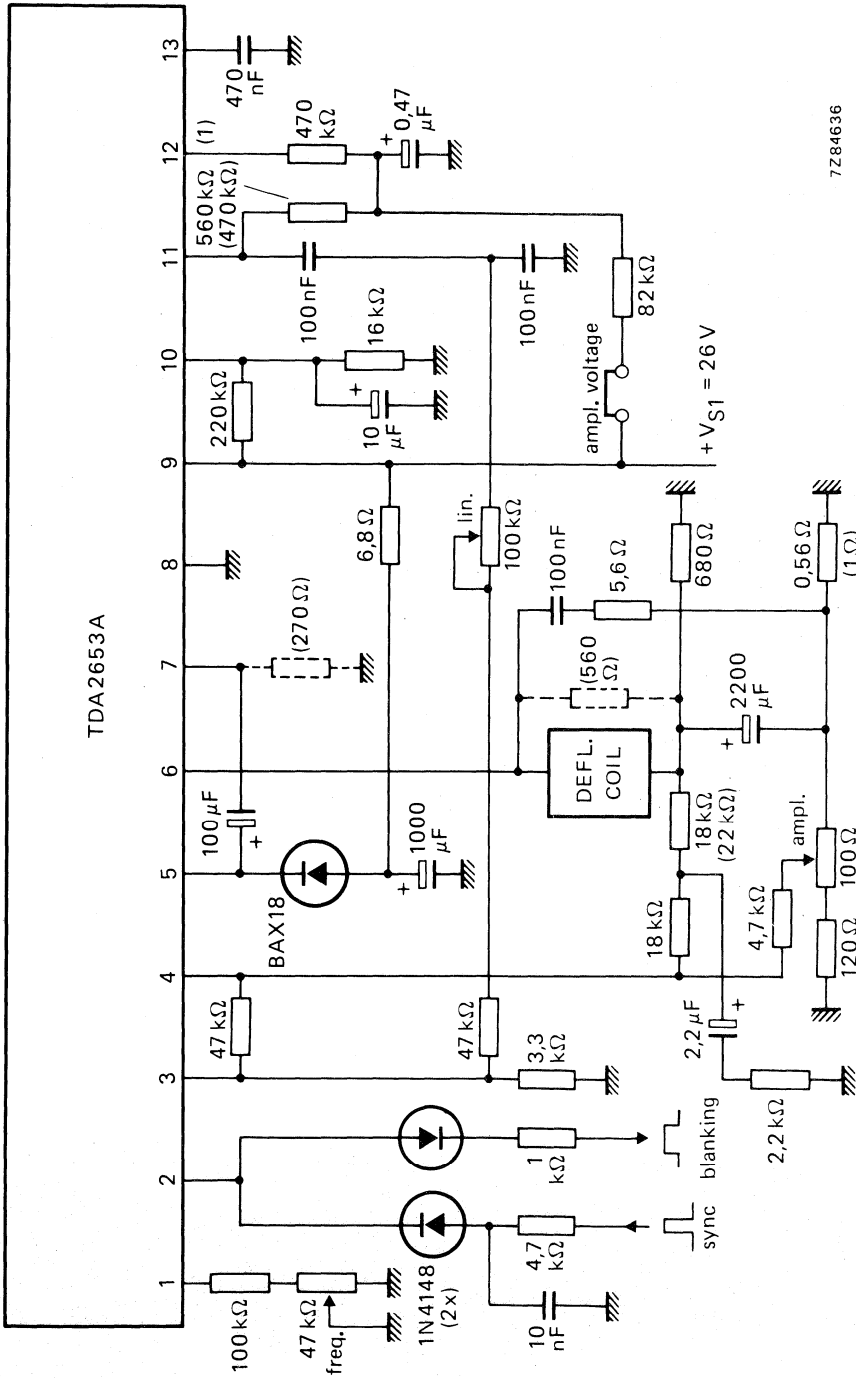

7284636

(1) Condition for pin 12: LOW voltage level = 50 Hz; HIGH voltage level = 60 Hz.

Fig. 3 Typical vertical deflection circuit for 30AX system (26 V). The values given in parentheses and the dotted components are valid for the PIL-S4 system.

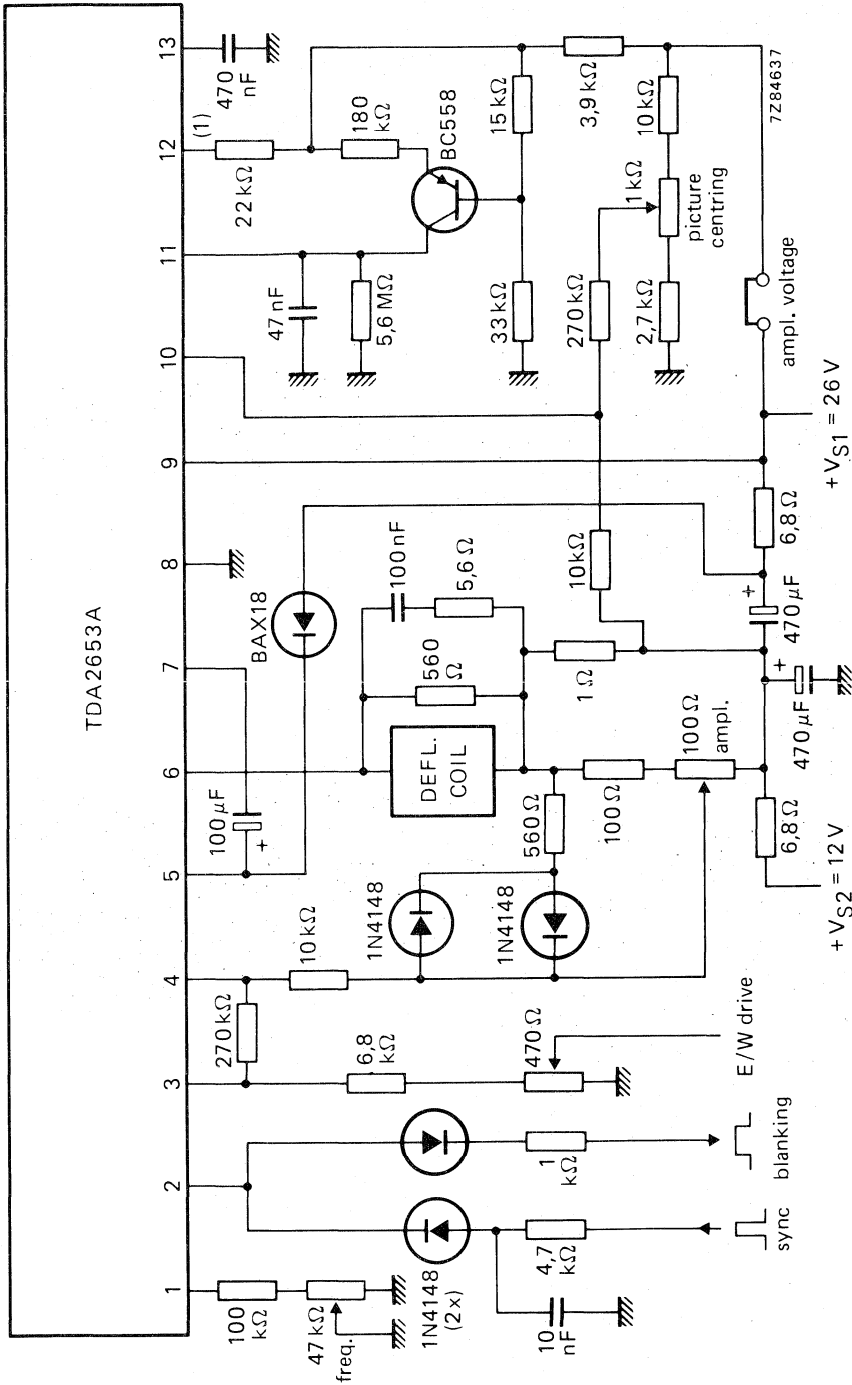

(1) Condition for pin 12: LOW voltage level = 50 Hz; HIGH voltage level = 60 Hz.

Fig. 4 Typical vertical deflection circuit for 30AX system (VS1 = 26 V, VS2 = 12 V) in quasi-bridge connection.

## VERTICAL DEFLECTION CIRCUIT

The TDA2654 is a monolithic integrated circuit for vertical deflection in monochrome and tiny-vision colour television receivers.

The circuit incorporates the following functions:

- Oscillator
- Synchronization circuit
- Blanking pulse generator
- Sawtooth generator
- S-correction and linearity circuit
- Comparator and drive circuit
- Output stage
- Flyback dissipation limiting circuit
- Supply for pre-stages via internal voltage divider
- Thermal protection circuit
- Controlled switch-on

### QUICK REFERENCE DATA

Supply voltage range (ref. to tab = ground)	$V_p$	10 to 35 V
Output current (peak-to-peak value)	$I_g(p-p)$	max. 2 A
Total power dissipation	$P_{tot}$	max. 5 W
Operating junction temperature	$T_j$	max. 150 °C
Thermal resistance from junction to tab	$R_{th j-tab}$	= 12 °C/W

### PACKAGE OUTLINE

9-lead SIL; plastic (SOT-110B).

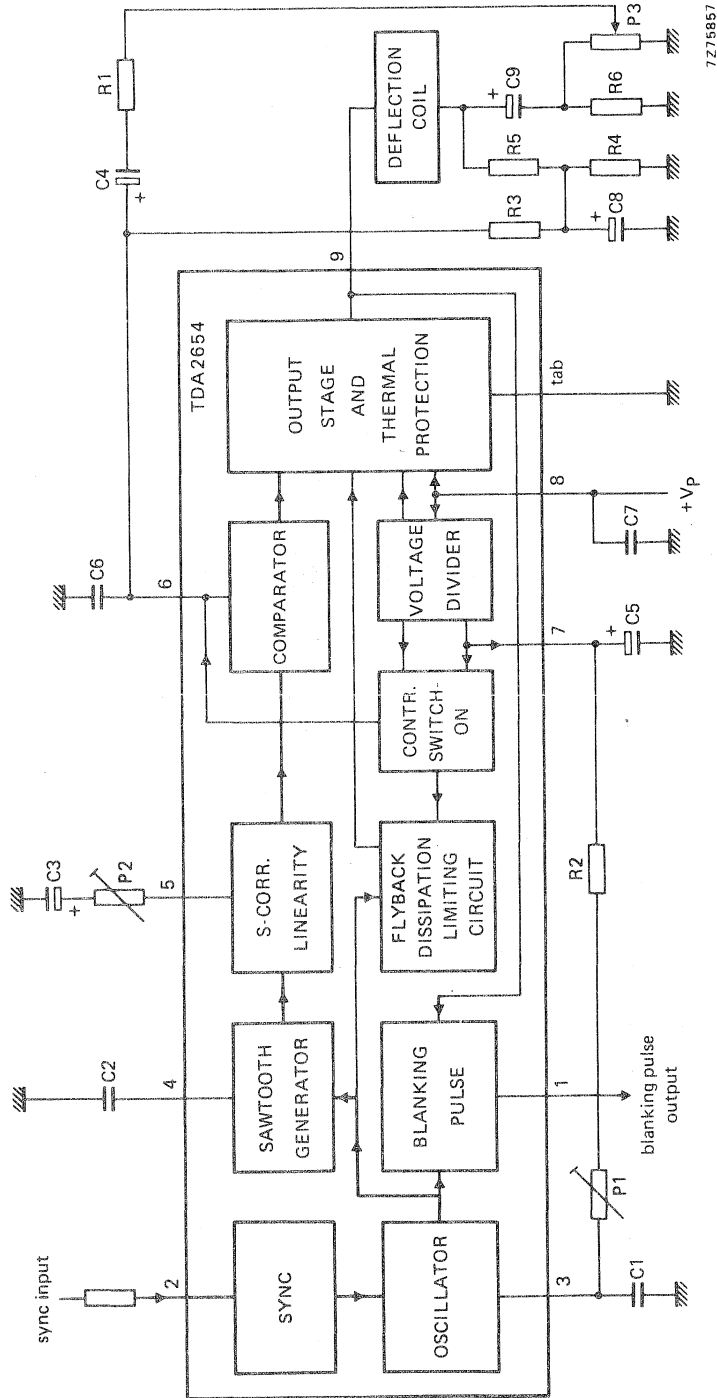


Fig. 1 Block diagram.



## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

All voltages and currents refer to the tab (ground) connection.

## Voltages

Pin 2	$V_2$	max.	5 V
Pin 3	$V_3$	max.	17 V
Pin 4	$V_4$	max.	17 V
Pin 5	$V_5$	max.	6 V
Pin 6	$V_6$	max.	13 V
Pin 7	$V_7$	max.	18 V
Pin 8	$V_8 (V_p)$	max.	35 V

## Currents

Pin 1	$+I_1$	max.	1 mA
	$-I_1$	max.	5 mA
Pin 2	$I_2$	max.	2,5 mA
Pin 3	$I_3$	max.	30 mA
Pin 4	$I_4$	max.	30 mA
Pin 5	$\pm I_5$	max.	1 mA
Pin 6	$\pm I_6$	max.	3 mA
Pin 9 (repetitive)	$\pm I_9$	max.	1 A
Pin 9 (non-repetitive)	$\pm I_9$	max.	1,5 A
Total power dissipation (see also Fig. 2)	$P_{tot}$	max.	5 W
Storage temperature	$T_{stg}$		-25 to +150 °C
Operating junction temperature	$T_j$	max.	150 °C

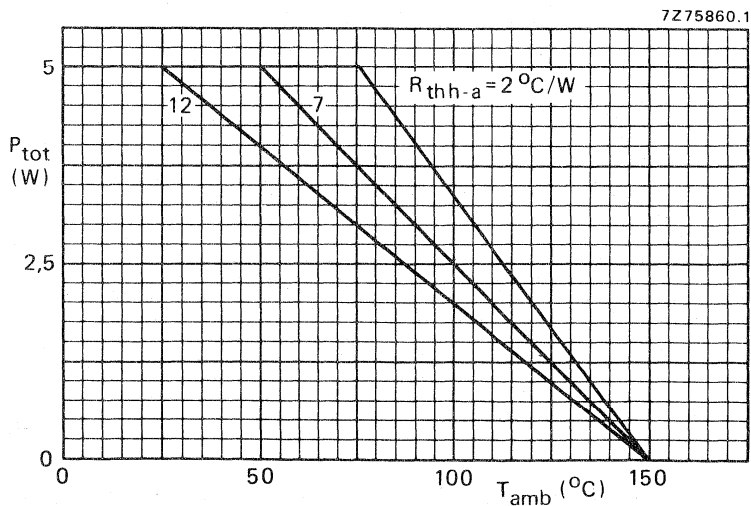


Fig. 2 Total power dissipation. The graph takes into account an  $R_{th\ tab-h} = 1\text{ °C/W}$  which is to be expected when the tab is connected to a heatsink with one 3 mm bolt, without using heatsink compound.  $R_{th\ j-tab} = 12\text{ °C/W}$ .

## CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified; voltages and currents ref. to tab (ground)

			monochrome (Fig. 3)	tiny-vision colour (Fig. 4)	
Supply voltage (pin 8)	$V_p$	typ.	25	31	V
Supply current (pin 8)	$I_p$	typ.	165	150	mA
Total power dissipation	$P_{tot}$	typ.	3,1	3,5	W
Output voltage (peak-to-peak value)	$V_{g(p-p)}$	typ.	22	28	V
Blanking pulse; $I_1 = 1\text{ mA}$	$V_1$	typ.	11,5	14,5	V
Blanking pulse duration	$t_p$	typ.	1,3	1,4	ms
D.C. input voltage (pin 6)	$V_6$	typ.	3,4	4,4	V
Deflection current (peak-to-peak value)	$I_{g(p-p)}$	typ.	1,1	0,92	A
Flyback time	$t$	typ.	1,3	1,32	ms
Free running oscillator frequency	$f_{osc}$	typ.	46	46	Hz
Oscillator thermal drift		typ.	-0,01	-0,01	Hz/ $^{\circ}\text{C}$
Oscillator voltage shift		typ.	-0,13	-0,12	Hz/V
Tracking range oscillator		typ.	18	18	%
Synchronization input voltage	$V_2$	>	1	1	V
Voltage divider ratio	$V_7/V_8$	typ.	0,52	0,52	
Input resistance pin 7	$R_7$	typ.	2,8	2,8	$k\Omega$
Recommended thermal resistance of heatsink for $T_{amb}$ up to $70\text{ }^{\circ}\text{C}$	$R_{th\ h-a}$	<	13	10	$^{\circ}\text{C/W}$

## PINNING

- |                                       |                               |
|---------------------------------------|-------------------------------|
| 1. Blanking pulse output              | 6. Feedback input             |
| 2. Synchronization input              | 7. Voltage divider            |
| 3. Oscillator timing network          | 8. Positive supply            |
| 4. Sawtooth generator                 | 9. Output                     |
| 5. S-correction and linearity control | Tab. Negative supply (ground) |

## APPLICATION INFORMATION (see also Fig. 1)

## The function is described against the corresponding pin number

## 1. Blanking pulse output

When the IC is adjusted on a free running frequency of 46 Hz the internal blanking pulse generator delivers a blanking pulse with a duration between 1,2 ms and 1,5 ms. The circuit is, however, made such that when the flyback time of the deflection current is longer, the blanking pulse corresponds to the flyback time. The output voltage is also high when the voltage at pin 9 is lower than nominal 5 V. An external blanking circuit is recommended when tiny-vision receivers are operated from a car-battery.

## 2. Synchronization input

The oscillator has to be synchronized by a positive-going pulse. The circuit is made such that synchronization is inhibited during the flyback time.

**APPLICATION INFORMATION** (continued)**3. Oscillator**

The oscillator frequency is set by the potentiometer P1 and resistor R2 between pins 3 and 7 and capacitor C1 between pin 3 and ground. For 50 Hz systems the free running frequency is preferably adjusted to 46 Hz.

**4. Sawtooth generator**

This pin supplies the charging and discharging currents of the capacitor between pin 4 and ground (C2).

**5. S-correction and linearity control**

The amount of S-correction can be set by the value of C3. For 110° deflection coils, e.g. AT1040/15, a capacitor of 15  $\mu\text{F}$  will give the right value for S-correction. For 90° deflection systems (e.g. AT1235/00) a nearly linear deflection current is required, this can be achieved by increasing C3 to 100  $\mu\text{F}$ . The linearity can be adjusted by potentiometer P2.

**6. Output current feedback**

To this pin is applied a part of the output current measured across R6 and superimposed on a d.c. voltage derived from the voltage across the output coupling capacitor. This signal is compared with the internal reference sawtooth. The internal reference sawtooth has an amplitude of about 0,6 V peak to peak and a d.c. level of about 3,4 V, for a supply voltage of 25 V at pin 8.

**7. Internal voltage divider decoupling**

The voltage on this pin is about half the supply voltage at pin 8 and is applied to the bases of emitter followers supplying the pre-stages of the IC. This voltage controls the amplitude of the internal reference sawtooth. In this way tracking with the line deflection system is achieved when the supply voltage at pin 8 is derived from the line output transformer.

**8. Positive supply**

The value depends on the deflection coil.

**9. Output**

The deflection coil is connected to ground via coupling capacitor C9 and current sensing resistor R6. The line frequency superimposed on the output voltage may be too high due to the current feedback system. The line frequency ripple can be decreased by connecting a resistor across the deflection coil. The flyback time can be influenced by the resistor divider (R4, R5) for the d.c. feedback to pin 6. It should be noted that the output voltage shows a negative swing of about 1 V during the first (positive current) part of the flyback.

**Tab**

The tab is used as negative supply (ground) connection. Therefore, the tab should be well connected to the negative side of the power supply.

**Controlled switch-on**

This feature is achieved by charging the a.c. coupling capacitor (C4; connected to pin 6) from an internal current source of about 2 mA (voltage limited to maximum 15 V) for a short period after switch-on. The charging time can be influenced by the value of C5 (connected to pin 7). Discharging of C4 results in a slowly increasing deflection current after a delay of about 1 second. The blanking voltage at pin 1 is high during this delay.


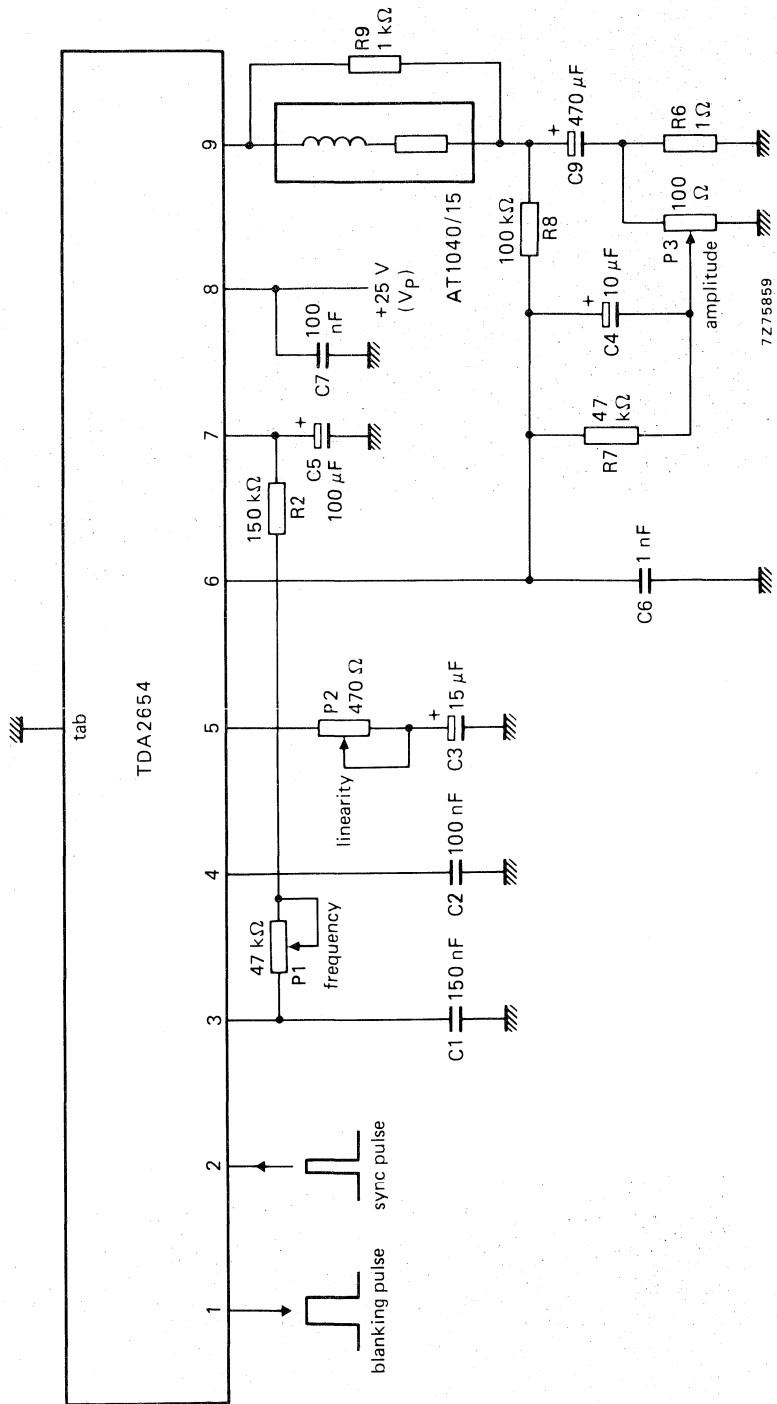


Fig. 3 Monochrome 110° vertical deflection system.

APPLICATION INFORMATION (continued)

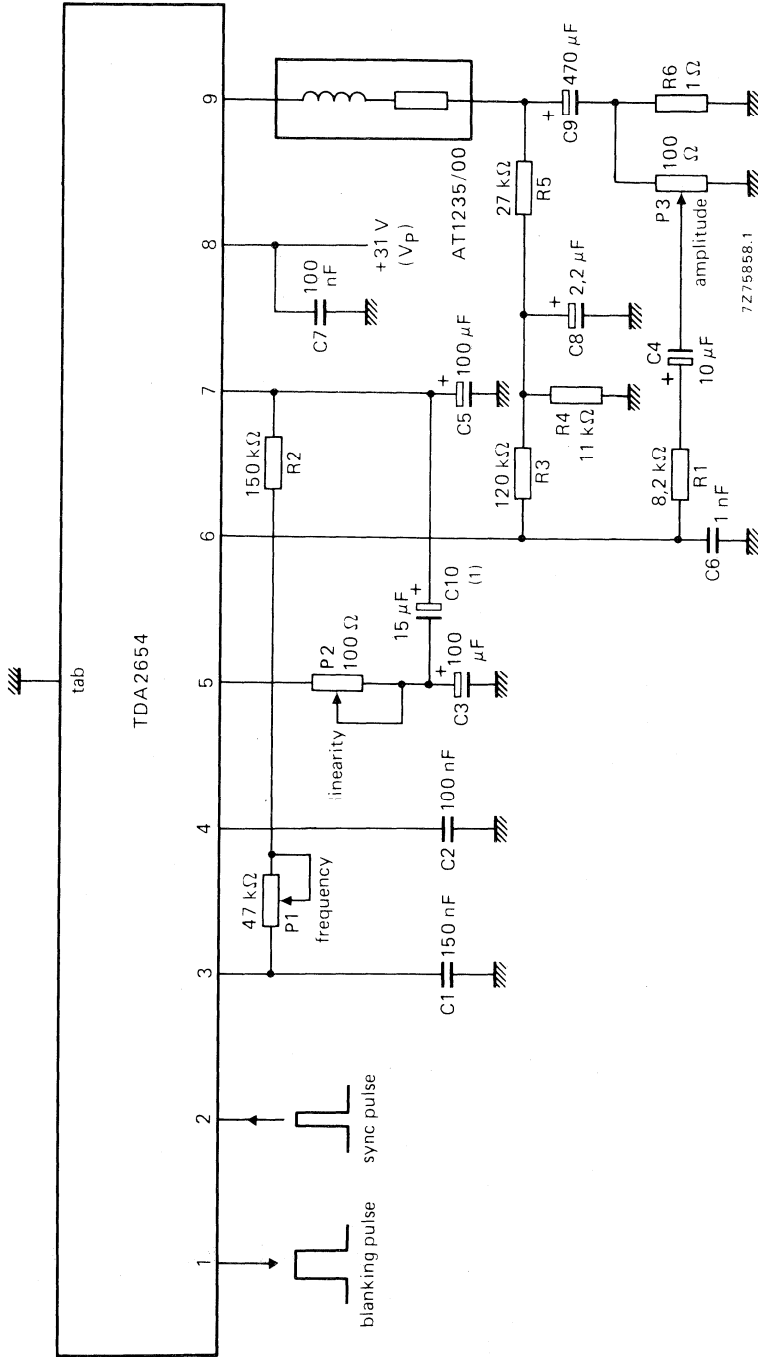

(1) Only required when rapid variations in the supply voltage are expected.

Fig. 4 Colour 90° vertical deflection system.



## VERTICAL DEFLECTION CIRCUIT

### GENERAL DESCRIPTION

The TDA2655B is a monolithic integrated circuit for vertical deflection in colour television receivers with 90° picture tubes.

#### Features

- Synchronization circuit
- Vertical oscillator; 50/60 Hz switch
- Sawtooth generator with buffer stage
- Preamplifier with fed-out inputs
- Output stage with thermal and short-circuit protection
- Flyback generator
- Blanking pulse generator with guard circuit
- Voltage stabilizer
- Frequency detector with memory and storage

### QUICK REFERENCE DATA

For 90° deflection; measured with respect to cooling fin (ground)

			concept 1*	concept 2*	
System supply voltages	$V_{P1}$	typ.	22	22	V
	$V_{P2}$	typ.	12	—	V
System supply currents	$I_{P1}$	typ.	135	140	mA
	$-I_{P2}$	typ.	8	—	mA
Deflection current (peak-to-peak value)	$I_{g(p-p)}$	typ.	450	450	mA
Synchronization input voltage (peak-to-peak value)	$V_{5(p-p)}$	min.	1	1	V

\*Concept 1: with two supply voltages ; concept 2: with one supply voltage. (See also Figs 2 and 3).

### PACKAGE OUTLINE

12-lead DIL; plastic with metal cooling fin (SOT-150).

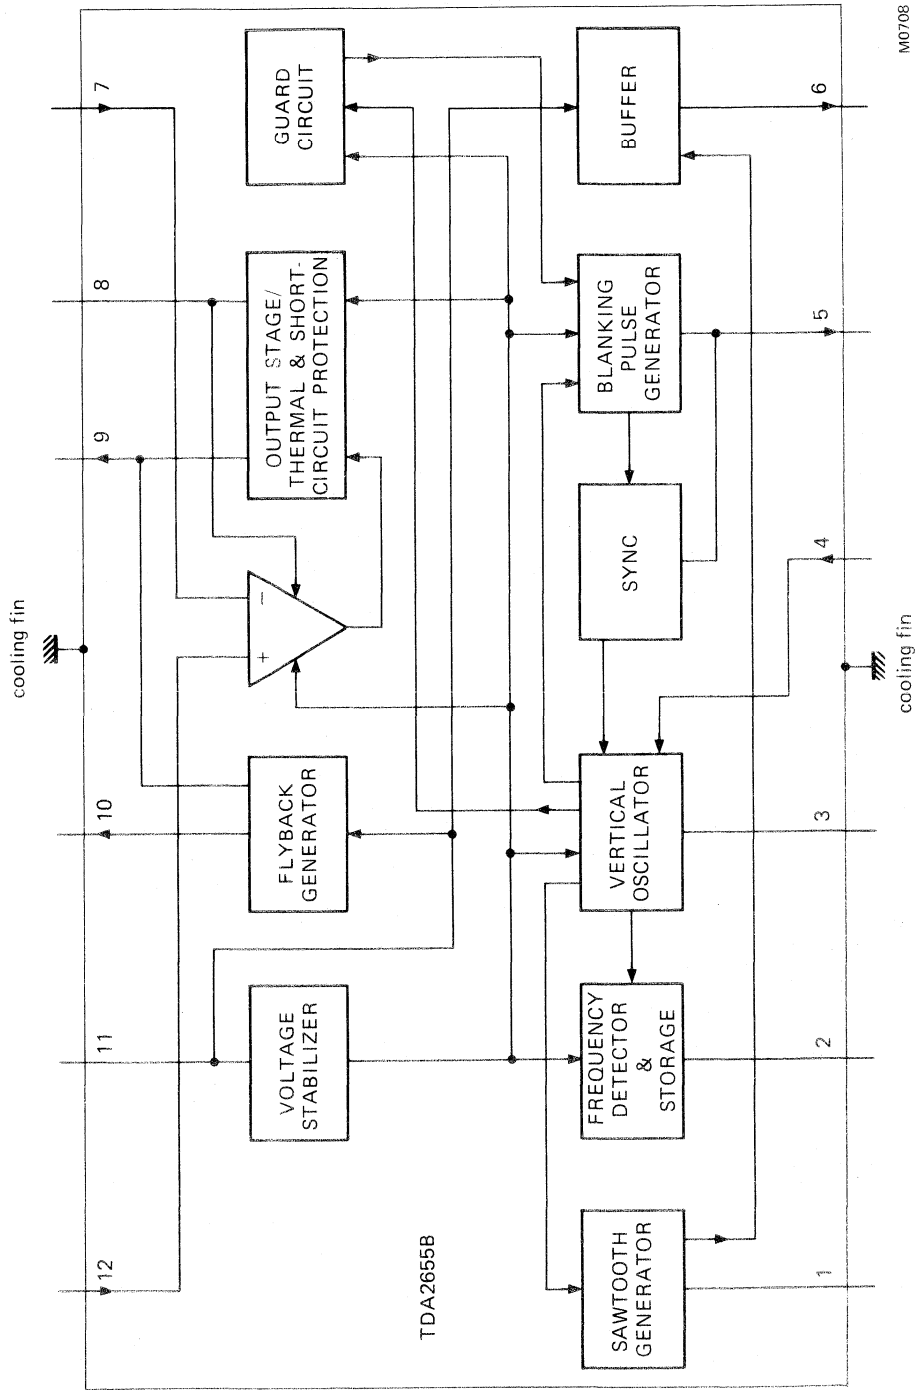


Fig. 1 Block diagram.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC134)

**Voltages**

with respect to cooling fin (ground)

Supply voltage (pin 11)	$V_{11} = V_P$	max.	40	V
Supply voltage output stage (pin 8)	$V_8$	max.	60	V
Pin 9	$V_9$	max.	60	V
	$-V_9$	max.	0	V
Pin 10	$V_{10}$	max.	40	V
Pin 3	$V_3$	max.	7	V
Pin 1	$V_1$	max.	40	V
Pin 6	$V_6$	max.	7	V
Pins 7 and 12	$V_7; V_{12}$	max.	24	V

**Currents**

Pin 10	$I_{10}$	max.	1,2	A
	$-I_{10}$	max.	1,5	A
Pin 5	$\pm I_5$	max.	10	mA
Pin 2	$I_2$	max.	3	mA
Pin 1	$I_1$	max.	50	mA
	$-I_1$	max.	0,1	mA
Pin 6	$-I_6$	max.	5	mA
Pin 4	$-I_4$	max.	1	mA
Pin 8, pin 9 and cooling fin	internally limited by the short-circuit protection circuit			

**Temperatures**

Total power dissipation	internally limited by the short-circuit protection circuit		
Storage temperature range	$T_{stg}$	-55 to +150 °C	
Operating ambient temperature range	$T_{amb}$	0 °C to limiting values	

**PINNING**

pin number	function	pin number	function
1.	sawtooth capacitor	7.	feedback input
2.	frequency storage information	8.	positive supply of output stage
3.	oscillator capacitor	9.	output
4.	oscillator resistor (adjustment)	10.	flyback generator output
5.	synchronization input/blanking output	11.	positive supply ( $V_P$ )
6.	sawtooth buffer stage output	12.	preamplifier input

## CHARACTERISTICS

$V_P = 22 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; these characteristics are measured with respect to cooling fin (ground), unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply voltage/output stage</b>					
Supply voltage	$V_{11} = V_P$	9	—	30	V
Output voltage at $I_g = 0,75 \text{ A}$	$V_g$	—	1,2	1,4	V
at $-I_g = 0,75 \text{ A}$	$V_g$	$(V_P - 1,9)$	$(V_P - 1,7)$	—	V
Flyback generator output voltage at $I_{10} = 0,75 \text{ A}$	$V_{10}$	—	$(V_P - 2,0)$	—	V
<b>Supply currents (without load)</b>					
pin 11	$I_{11}$	—	10	—	mA
pin 8	$I_8$	—	3	—	mA
Output current	$\pm I_g$	—	—	1,2	A
Flyback generator peak current	$\pm I_{10}$	—	—	1,2	A
<b>Feedback</b>					
Preamplifier quiescent input currents	$-I_7 = -I_{12}$	—	0,1	—	$\mu\text{A}$
<b>Synchronization</b>					
Sync input voltage range	$V_5$	1,0	—	—	V
Synchronizing range		—	28	—	%
<b>Oscillator/sawtooth generator</b>					
Frequency setting input voltage	$V_4$	6	—	9	V
Sawtooth generator output voltage (peak value)	$V_{1(m)}$	0	$(V_P - 2)$	—	V
Sawtooth generator output current	$I_1$	—	—	30	mA
Sawtooth generator leakage current	$-I_1$	2	—	—	$\mu\text{A}$
Oscillator temperature dependency $T_{\text{case}} = 20 \text{ to } 100 \text{ }^\circ\text{C}$	$(\Delta f/f)/\Delta T_{\text{case}}$	—	$10^{-4}$	—	$\text{K}^{-1}$
Oscillator voltage dependency $V_P = 10 \text{ to } 30 \text{ V}$	$(\Delta f/f)/\Delta V_P$	—	$10^{-3}$	—	$\text{V}^{-1}$
<b>Blanking pulse generator</b>					
Output voltage (at $I_5 = 1 \text{ mA}$ )	$V_5$	—	20	—	V
Output resistance	$R_5$	—	410	—	$\Omega$
Output current (at $V_P = 21 \text{ V}$ )	$-I_5$	—	—	5	mA
Blanking pulse duration at 50 Hz sync	$t_b$	1,33	1,4	1,47	ms
<b>50/60 Hz frequency detector</b>					
Output saturation voltage (LOW level for 50 Hz)	$V_2$	—	1	—	V
Leakage current	$I_2$	—	1	—	$\mu\text{A}$

parameter	symbol	min.	typ.	max.	unit
<b>Buffer stage</b>					
Output voltage	$V_{6(m)}$	0	$(V_P - 1)$	—	V
Output current	$-I_6$	—	—	4	mA
<b>Thermal resistance</b>					
From junction to case (cooling fin)	$R_{th\ j-c}$	—	—	15	K/W
<b>Junction temperature</b>					
Switching point thermal protection	$T_j$	142	150	158	°C

**APPLICATION INFORMATION**


The following application data is obtained from measurements made on the circuits shown in Figs 2 and 3, application circuits for 90° deflection systems. Measurements are made with respect to the cooling fin (ground).

			Fig. 2 concept 1*	Fig. 3 concept 2*	
System supply voltages	$V_{P1}$	typ.	22	22	V
	$V_{P2}$	typ.	12	—	V
Supply currents	$I_{P1}$	typ.	135	140	mA
	$-I_{P2}$	typ.	8	—	mA
Output voltage (d.c. value)	$V_g$	typ.	12,2	13,8	V
Output voltage (peak-to-peak value)	$V_{g(p-p)}$	typ.	42	43	V
Output current (peak value)	$-I_{g(m)}$	typ.	450	450	mA
Deflection current (peak-to-peak value)	$I_{defl\ (p-p)}$	typ.	850	850	mA
Flyback time	$t_{fl}$	typ.	0,9	1,0	ms
Oscillator frequency adjustment without sync	$f_o$	typ.	46,5	46,5	Hz
Total power dissipation per package (see note)	$P_{tot}$	max.	1,8	1,8	W
Ambient temperature	$T_{amb}$	max.	70	70	°C
Thermal resistance (junction to ambient)	$R_{th\ j-a}$	max.	40	40	K/W

\*Concept 1 : with two supply voltages; concept 2 : with one supply voltage.


**Note**

Calculated with  $\Delta V_{P1}$  of +5% and  $\Delta R_{defl}$  of -7%.

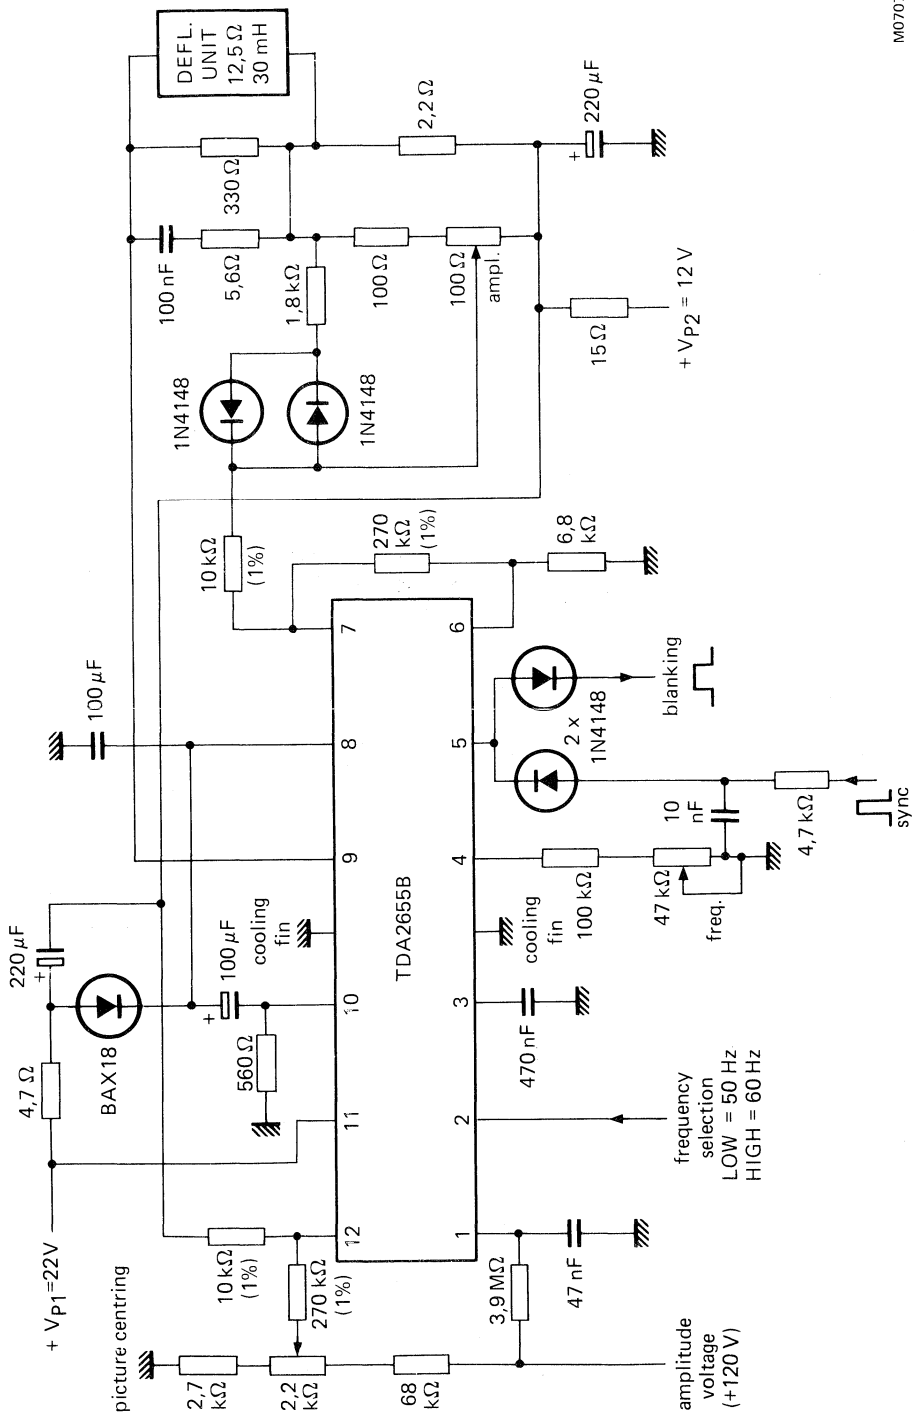

M0707

Fig. 2 Typical application circuit with two supply voltages; for use with 90° picture tubes.

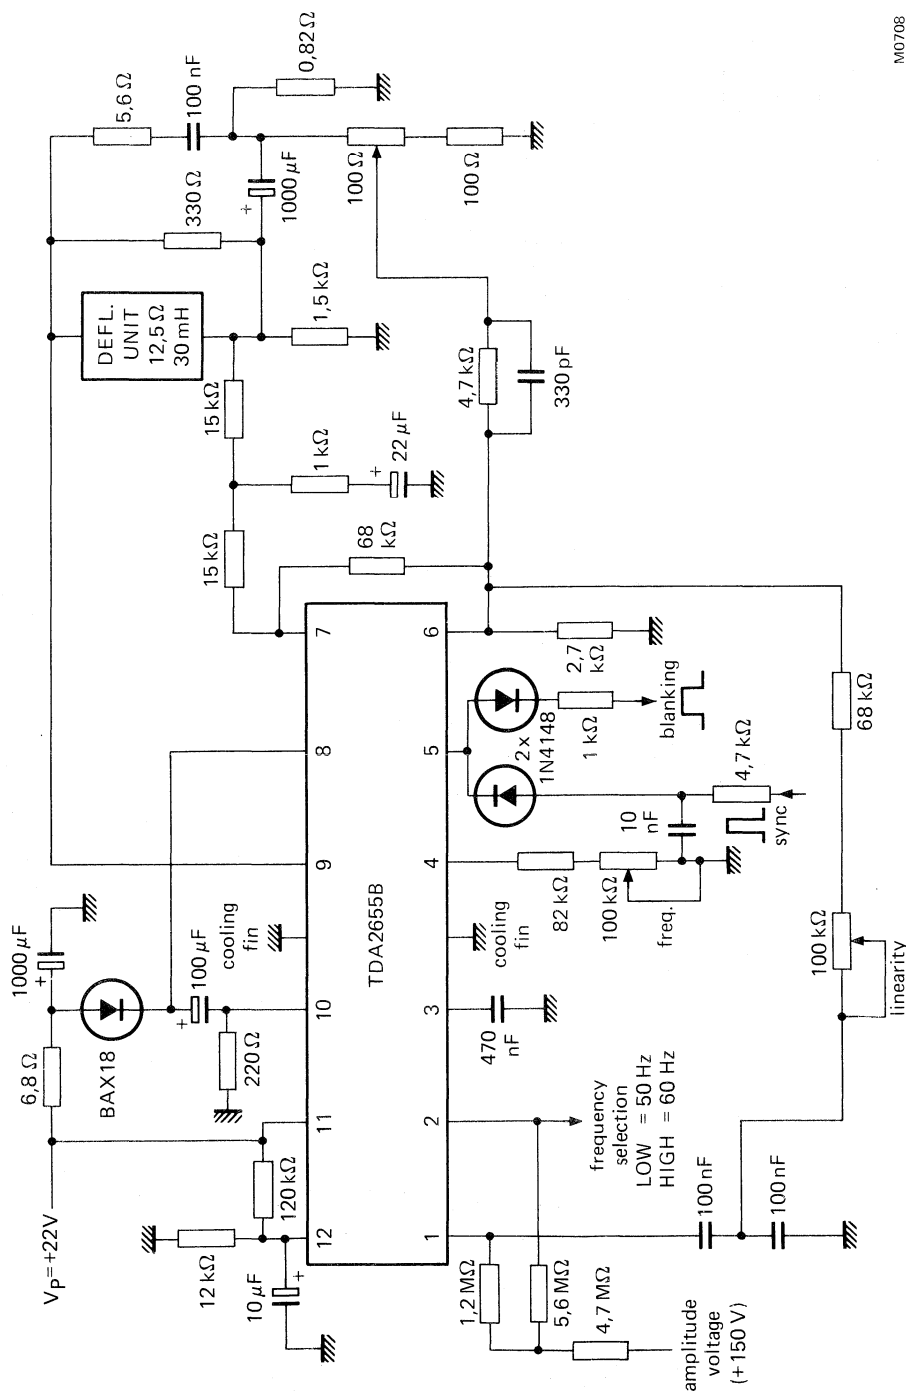

M0708

Fig. 3 Typical application circuit for a single supply voltage; for use with 90° picture tubes.



## VERTICAL DEFLECTION CIRCUIT

The TDA2658 is a monolithic integrated circuit for vertical deflection in small screen colour television receivers and monitors.

The circuit incorporates the following functions:


- Oscillator, switch capability for 50 Hz/60 Hz operation.
- Synchronization circuit.
- Blanking pulse generator with guard circuit.
- Sawtooth generator with buffer stage.
- Preamplifier with fed-out inputs.
- Output stage with thermal and short-circuit protection.
- Flyback generator.
- Voltage stabilizer.

### QUICK REFERENCE DATA

Supply voltage (pin 9)	$V_{9-8} = V_S$	typ.	26 V
Supply current (pin 5 + pin 9)	$I_5 + I_9 = I_S$	typ.	250 mA
Output current (peak-to-peak value)	$I_{6(p-p)}$	typ.	1,6 A
Picture frequency	f		50 Hz/60 Hz
Sync input pulse (peak-to-peak value)	$V_{2-8(p-p)}$	$\geq$	1 V
Thermal resistance from junction to mounting base	$R_{th j-mb}$	$\leq$	5 K/W

### PACKAGE OUTLINE

13-lead SIL; plastic power (SOT-141B).

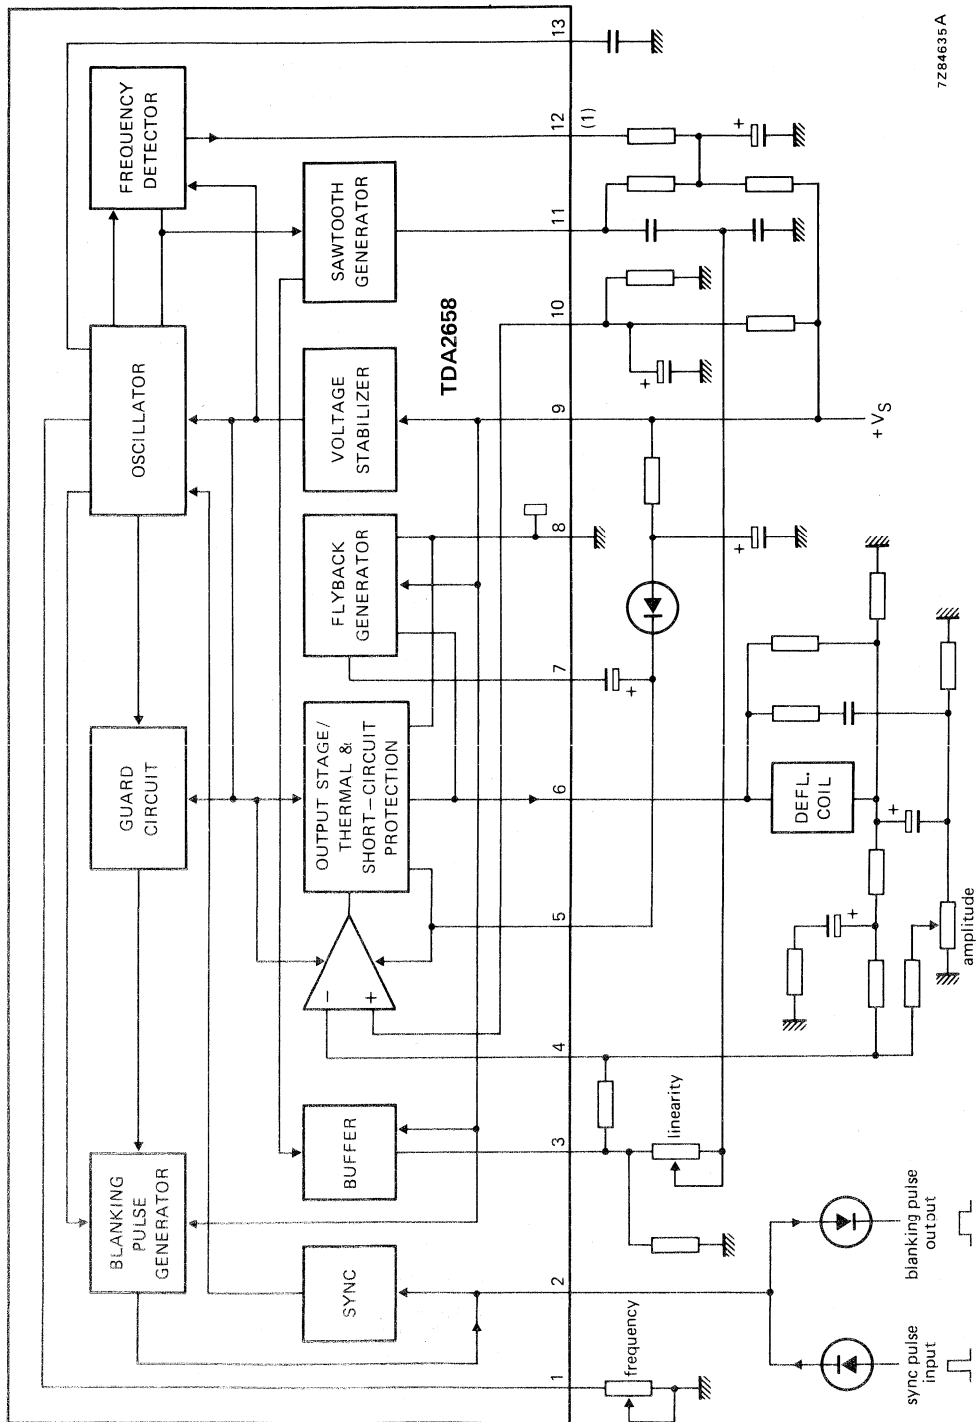

7Z84635A

(1) Condition for pin 12: LOW voltage level = 50 Hz; HIGH voltage level = 60 Hz.

Fig. 1 Block diagram.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 9)	$V_{9-8} = V_S$	max.	40 V
Supply voltage output stage (pin 5)	$V_{5-8}$	max.	58 V
<b>Voltages</b>			
Pin 3	$V_{3-11}$	max.	7 V
Pin 13	$V_{13-8}$	max.	7 V
Pins 4 and 10	$V_{4; 10-8}$	max.	24 V
Pin 6	$V_{6-8}$	max.	58 V
	$-V_{6-8}$	max.	0 V
Pins 7 and 11	$V_{7; 11-8}$	max.	40 V
<b>Currents</b>			
Pin 1	$I_1$	max.	0 mA
	$-I_1$	max.	1 mA
Pin 2	$\pm I_2$	max.	10 mA
Pin 3	$I_3$	max.	0 mA
	$-I_3$	max.	5 mA
Pin 7	$I_7$	max.	0,9 A
	$-I_7$	max.	1,1 A
Pin 11	$I_{11}$	max.	50 mA
	$-I_{11}$	max.	1 mA
Pin 12	$I_{12}$	max.	3 mA
	$-I_{12}$	max.	0 mA

Pins 5, 6 and 8: internally limited by the short-circuit protection circuit.

Total power dissipation: internally limited by the thermal protection circuit.

Storage temperature range  $T_{stg}$   $-25$  to  $+150$  °C

Operating ambient temperature range  $T_{amb}$   $0$  °C to limiting value

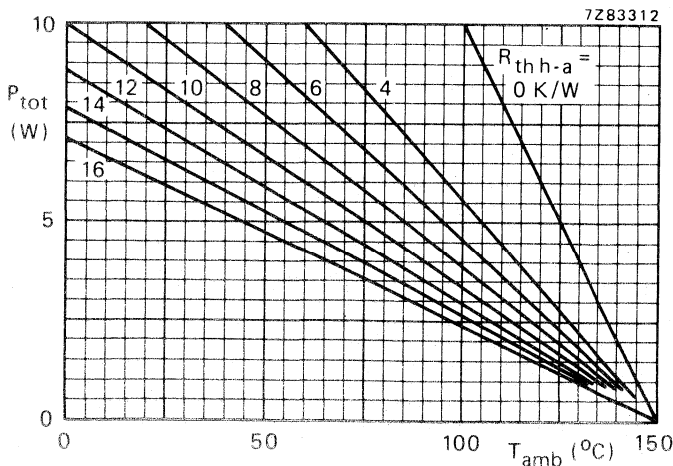


Fig. 2 Total power dissipation.  $R_{th\ h-a}$  includes  $R_{th\ mb-h}$  which is expected when heat-sink compound is used.  $R_{th\ j-mb} \leq 5\ K/W$ .

**CHARACTERISTICS**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_S = 26\text{ V}$ ; unless otherwise specified.

**Supply voltage/output stage**

Supply voltage	$V_{9-8} = V_S$	9 to 30 V
Output voltage	$V_{6-8}$	$\geq V_{5-8} - 2,2\text{ V}$
at $-I_6 = 0,75\text{ A}$		typ. $V_{5-8} - 1,9\text{ V}$
at $I_6 = 0,75\text{ A}$	$V_{6-8}$	typ. 1,3 V
		$\leq 1,6\text{ V}$
Flyback generator output voltage at $-I_6 = 0,75\text{ A}$	$V_{7-8}$	typ. $V_S - 2,2\text{ V}$
Peak output current	$\pm I_6$	$\leq 0,9\text{ A}$
Flyback generator peak current	$\pm I_7$	$\leq 0,9\text{ A}$

**Feedback**

Input quiescent current	$-I_4; I_0$	typ. 0,1 $\mu\text{A}$
-------------------------	-------------	------------------------

**Synchronization**

Sync input pulse	$V_{2-8}$	1 to 12 V
Tracking range		typ. 28 %

**Oscillator/sawtooth generator**

Oscillator frequency control input voltage	$V_{1-8}$	6 to 9 V
Sawtooth generator output voltage	$V_{3-8}$	0 to $V_S - 1,5\text{ V}$
	$V_{11-8}$	0 to $V_S - 1,5\text{ V}$
Sawtooth generator output current	$-I_3$	0 to 4 mA
	$I_{11}$	$\geq -2\text{ }\mu\text{A}$
		$\leq +30\text{ mA}$
Oscillator temperature dependency	$(\Delta f/f)/\Delta T_{case}$	typ. $10^{-4}\text{ K}^{-1}$
$T_{case} = 20\text{ to }100\text{ }^{\circ}\text{C}$		
Oscillator voltage dependency	$(\Delta f/f)/\Delta V_S$	typ. $4 \times 10^{-4}\text{ V}^{-1}$
$V_S = 10\text{ to }30\text{ V}$		

**Blanking pulse generator**

Output voltage	$V_{2-8}$	typ. 18,5 V
at $V_S = 24\text{ V}$ ; $I_2 = 1\text{ mA}$		
Output current	$-I_2$	$\leq 3\text{ mA}$
Output resistance	$R_{2-8}$	typ. 410 $\Omega$
Blanking pulse duration at 50 Hz sync	$t_b$	typ. $1,4 \pm 0,07\text{ ms}$

**50 Hz/60 Hz switch capability**

Saturation voltage; LOW voltage level	$V_{12-8}$	typ. 1 V
Output leakage current	$I_{12}$	typ. 1 $\mu\text{A}$

**Thermal resistance/junction temperature**

From junction to mounting base	$R_{th\ j-mb}$	$\leq$	5 K/W
Junction temperature; switching point thermal protection	$T_j$	typ.	$150 \pm 8$ °C

**PINNING**

- |  |                                    |
|--|------------------------------------|
| 1. Oscillator adjustment                 | 8. Ground                          |
| 2. Synchronization input/blanking output | 9. Positive supply ( $V_S$ )       |
| 3. Sawtooth generator output             | 10. Reference voltage              |
| 4. Preamplifier input                    | 11. Sawtooth capacitor             |
| 5. Positive supply of output stage       | 12. 50 Hz/ 60 Hz switching voltage |
| 6. Output                                | 13. Oscillator capacitor           |
| 7. Flyback generator output              |                                    |

**APPLICATION INFORMATION**

The function is described against the corresponding pin number

## 1, 13. Oscillator

The oscillator frequency is determined by a potentiometer at pin 1 and a capacitor at pin 13.

## 2. Sync input/blanking output

Combination of sync input and blanking output. The oscillator has to be synchronized by a positive-going pulse between 1 and 12 V. The integrated frequency detector delivers a switching level at pin 12.

The blanking pulse amplitude is 20 V with a load of 1 mA ( $V_S = 26$  V).

## 3. Sawtooth generator output

The sawtooth signal is fed via a buffer stage to pin 3. It delivers the signal which is used for linearity control, and drive of the preamplifier. The sawtooth is applied via a shaping network to pin 11 (linearity) and via a resistor to pin 4 (preamplifier).

## 4. Preamplifier input

The d.c. voltage is proportional to the output voltage (d.c. feedback). The a.c. voltage is proportional to the sum of the buffered sawtooth voltage at pin 3 and the voltage, with opposite polarity, at the feedback resistor (a.c. feedback).

## 5. Positive supply of output stage

This supply is obtained from the flyback generator. An electrolytic capacitor between pins 7 and 5, and a diode between pins 5 and 9 have to be connected for proper operation of the flyback generator.

## 6. Output of class-B power stage

The vertical deflection coil is connected to this pin, via a series connection of a coupling capacitor and a feedback resistor, to ground.

## 7. Flyback generator output

An electrolytic capacitor has to be connected between pins 7 and 5 to complete the flyback generator.

## 8. Negative supply (ground)

Negative supply of output stage and small signal part.

## 9. Positive supply

The supply voltage at this pin is used to supply the flyback generator, voltage stabilizer, blanking pulse generator and buffer stage.

**APPLICATION INFORMATION** (continued)

## 10. Reference voltage of preamplifier

External adjustment and decoupling of reference voltage of the preamplifier.

## 11. Sawtooth capacitor


This sawtooth capacitor has been split to realize linearity control.

## 12. 50 Hz/60 Hz switching level

This pin delivers a LOW voltage level for 50 Hz and a HIGH voltage level for 60 Hz. The amplitudes of the sawtooth signals can be made equal for 50 Hz and 60 Hz with these levels.

The following application data are measured in Fig. 3

System supply voltages	$V_{S1}$	typ.	24 V
System supply currents	$I_{S1}$	typ.	145 mA
Output voltage	$V_{6-8}$	typ.	14 V
Output voltage (peak value)	$V_{6-8}$	typ.	44 V
Deflection current (peak-to-peak value)	$I_{6(p-p)}$	typ.	1 A
Flyback time	$t_{fl}$	typ.	1 ms
Total power dissipation per package	$P_{tot}$	typ. max.	1,7 W 2,2 W
Oscillator frequency unsynchronized	f	typ.	46,5 Hz

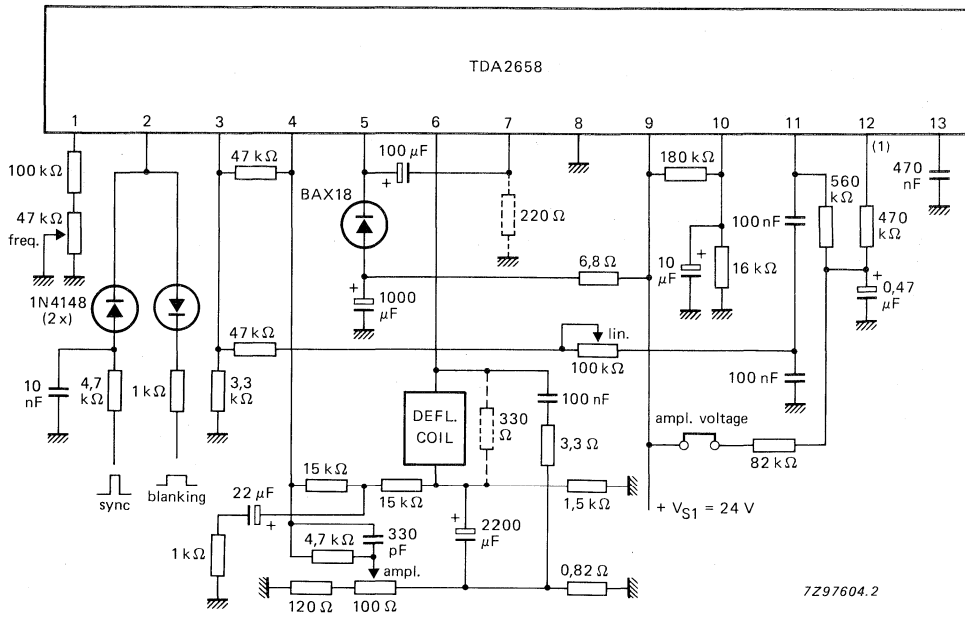

(1) Condition for pin 12: LOW voltage level = 50 Hz; HIGH voltage level = 60 Hz.

Fig. 3 Typical vertical deflection circuit.




## FM LIMITER/DEMODULATOR

The TDA2730 is a monolithic integrated circuit for use in audio-visual equipment, e.g. : video recorders and video disc players.

The circuit comprises an f. m. limiter/demodulator for the playback signal, a video amplifier and an electronic switch, which can be used for drop-out elimination.

QUICK REFERENCE DATA			
Supply voltage	$V_{6-11}$	typ.	12 V
Supply current	$I_6$	typ.	42 mA
Input signal range (peak-to-peak value)	$V_{4-5(p-p)}$	30 to 2000	mV
Video output signal (peak-to-peak value)	$V_{2-11(p-p)}$	typ.	4 V


### BLOCK DIAGRAM

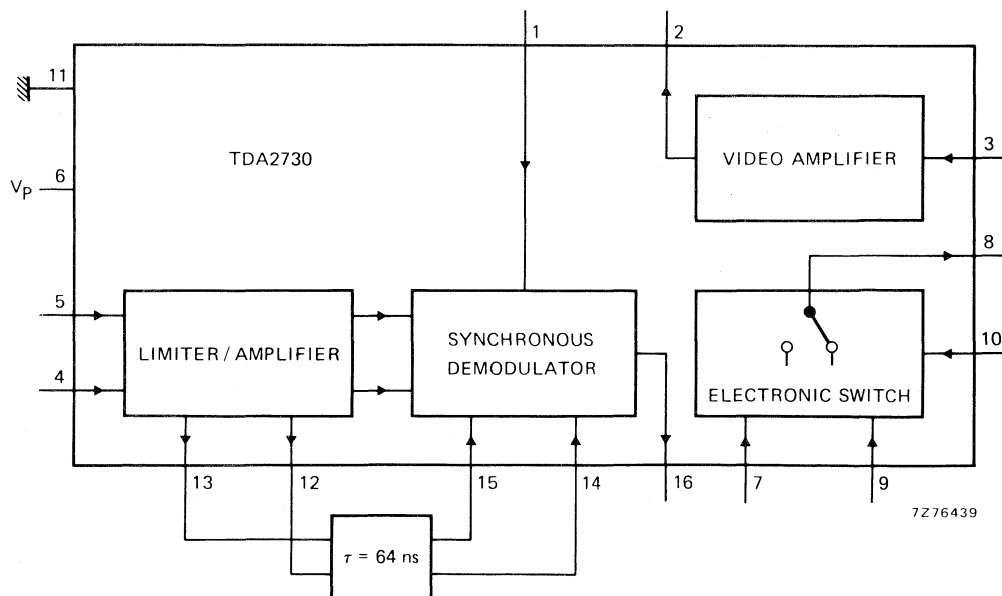

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

CIRCUIT DIAGRAM

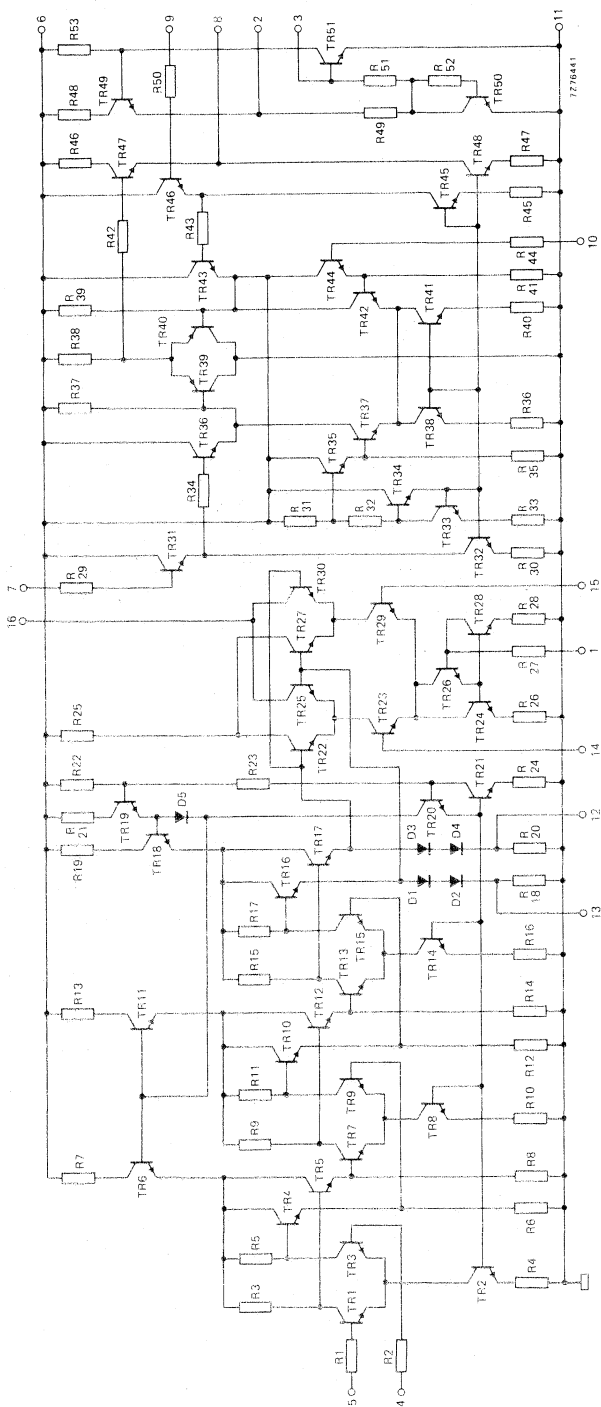



**RATINGS** Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltage

Supply voltage  $V_{6-11}$  max. 13 V


Power dissipation

Total power dissipation  
(see also derating curve below)  $P_{tot}$  max. 1,25 W

Temperatures

Storage temperature  $T_{stg}$  -65 to +125 °C

Operating ambient temperature see derating curve below

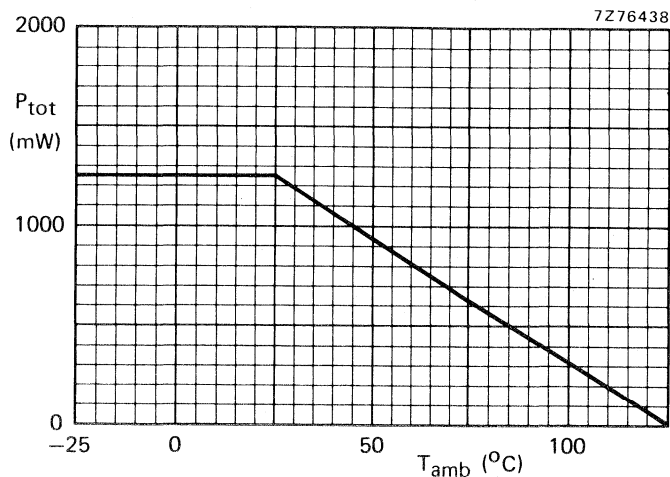

**CHARACTERISTICS** measured in the circuit on in Fig. 1

<u>Supply voltage range</u>	$V_{6-11}$	typ. 12 V 11 to 13 V
-----------------------------	------------	-------------------------

The following characteristics are measured at  $V_{6-11} = 12$  V;  $T_{amb} = 25$  °C

<u>Supply current</u>	$I_6$	typ. 42 mA 25 to 54 mA
-----------------------	-------	---------------------------

#### Limiter

Start of limiting (-3 dB) $f_0 = 4$ MHz; peak-to-peak value	$V_{4-5(p-p)}$	typ. 0,8 V
Input signal range for constant luminance output (peak-to-peak value)	$V_{4-5(p-p)}$	30 to 2000 mV
Output voltage (peak-to-peak value)	$V_{12-13(p-p)}$	typ. 750 mV
Available output voltage at an external load of 1 k $\Omega$ ; peak-to-peak value	$V_{12-13(p-p)}$	> 5 V

#### Demodulator

Measured at  $I_1 = 4$  mA;  $|Z_{16-11}| = 1,5$  k $\Omega$ ; delay time  $\tau = 64$  ns;  $\Delta f = 1,4$  MHz  
( $f_L = 3,0$  MHz;  $f_H = 4,4$  MHz)

Current ratio	$I_1/I_{16}$	typ. 1
Output voltage (peak-to-peak value)	$V_{16-11}$	typ. 540 mV

#### Drop-out switch

Input drive voltage range	$V_{7;9-11}$	6,5 to 12 V
Voltage drop between input and output for signal flow from pin 7 to pin 8	$V_{7-8}$	typ. 1,5 V
for signal flow from pin 9 to pin 8	$V_{9-8}$	typ. 1,5 V
Input offset voltage	$ V_{7-8} - V_{9-8} $	< 20 mV
Switch actuating input voltage for signal flow from pin 7 to pin 8	$V_{10-11}$	0 to 2,7 V
for signal flow from pin 9 to pin 8	$V_{10-11}$	3,7 to 6,0 V
Output impedance at 1,5 mA by internal load	$Z_{8-11}$	emitter follower

**CHARACTERISTICS** (continued)**Video amplifier**

Input voltage level	V <sub>3-11</sub>	typ.	730	mV
Output voltage level	V <sub>2-11</sub>	typ.	5.5	V
Open loop gain	G	typ.	43	dB
Bandwidth (3 dB)	B	typ.	8.8	MHz
Output voltage (peak-to-peak value; see note)	V <sub>2-11(p-p)</sub>	typ.	4	V

Note

The gain of the amplifier is determined by the feedback network comprising the impedances between pins 2 and 3, and pins 8 and 3. The values quoted apply to the circuit in Fig. 1.

**PINNING**

- |                                |                              |
|--------------------------------|------------------------------|
| 1. Current setting demodulator | 9. Switch input              |
| 2. Video amplifier output      | 10. Switch actuating input   |
| 3. Video amplifier input       | 11. Negative supply (ground) |
| 4. F.M. signal input           | 12. Limiter output           |
| 5. F.M. signal input           | 13. Limiter output           |
| 6. Positive supply             | 14. Demodulator input        |
| 7. Switch input                | 15. Demodulator input        |
| 8. Switch output               | 16. Demodulator output       |

**APPLICATION INFORMATION**

**The function is quoted against the corresponding pin number**

1. Current setting of demodulator

The current into this pin directly **determines** the amplitude and the d. c. level of the demodulator output. At  $I_1 = 4$  mA, optimum temperature compensation is obtained.

2. Video amplifier output

A signal up to 4 V peak-to-peak is available from this output (Fig. 1).

This can be the video signal (Fig. 1) or the f. m. signal to the delay line (drop-out elimination; Fig. 2).

3. Video amplifier input

The demodulator output signal is the input signal to this pin (Fig. 1) or the f. m. modulated signal (Fig. 2).

4. F.M. signal input (in conjunction with pin 5)

A frequency modulated signal of 1 V peak-to-peak is applied between pins 4 and 5. D. C. feedback from the limiter output is applied to stabilize the operation.

5. F.M. signal input

See pin 4.

## APPLICATION INFORMATION (continued)

6. Positive supply

Correct operation can be obtained in the range 11 to 13 V.

7. Switch input

The signal applied to pin 7 or to pin 9 is transferred to pin 8, depending on the switch position. For an input level between 0 and 2,7 V at pin 10, the signal at pin 7 is transferred to pin 8, and when between 3,7 and 6 V the input signal at pin 9 is transferred to pin 8.

The signal at pin 7 or pin 9 may vary from 6,5 to 12 V.

The signal at pin 8 is 1,5 V below the value at pin 7 or 9.

The difference in input level at pins 7 and 9, to obtain equal output at pin 8, will be less than 20 mV.

8. Switch output

See pin 7.

9. Switch input

See pin 7.

10. Switch actuating input

See pin 7.

11. Negative supply (ground)12. Limiter output

A balanced signal is available between pins 12 and 13. The signal amplitude is limited to 750 mV at both outputs.

13. Limiter output

See pin 12.

14. Demodulator input

A phase shifted signal (with respect to the internally applied signal) is applied between pins 14 and 15.

15. Demodulator input

See pin 14.

16. Demodulator output

The output signal is proportional to :

- current into pin 1
- slope of the phase characteristic of the network between pins 12 and 13, and pins 14 and 15
- impedance level at the output
- the sweep ( $\Delta f$ ) of the f. m. signal.

A signal of typically 540 mV is available at this pin when using the component values in Fig. 1 and  $\Delta f = 1,4$  MHz.

APPLICATION INFORMATION (continued)

Test circuit

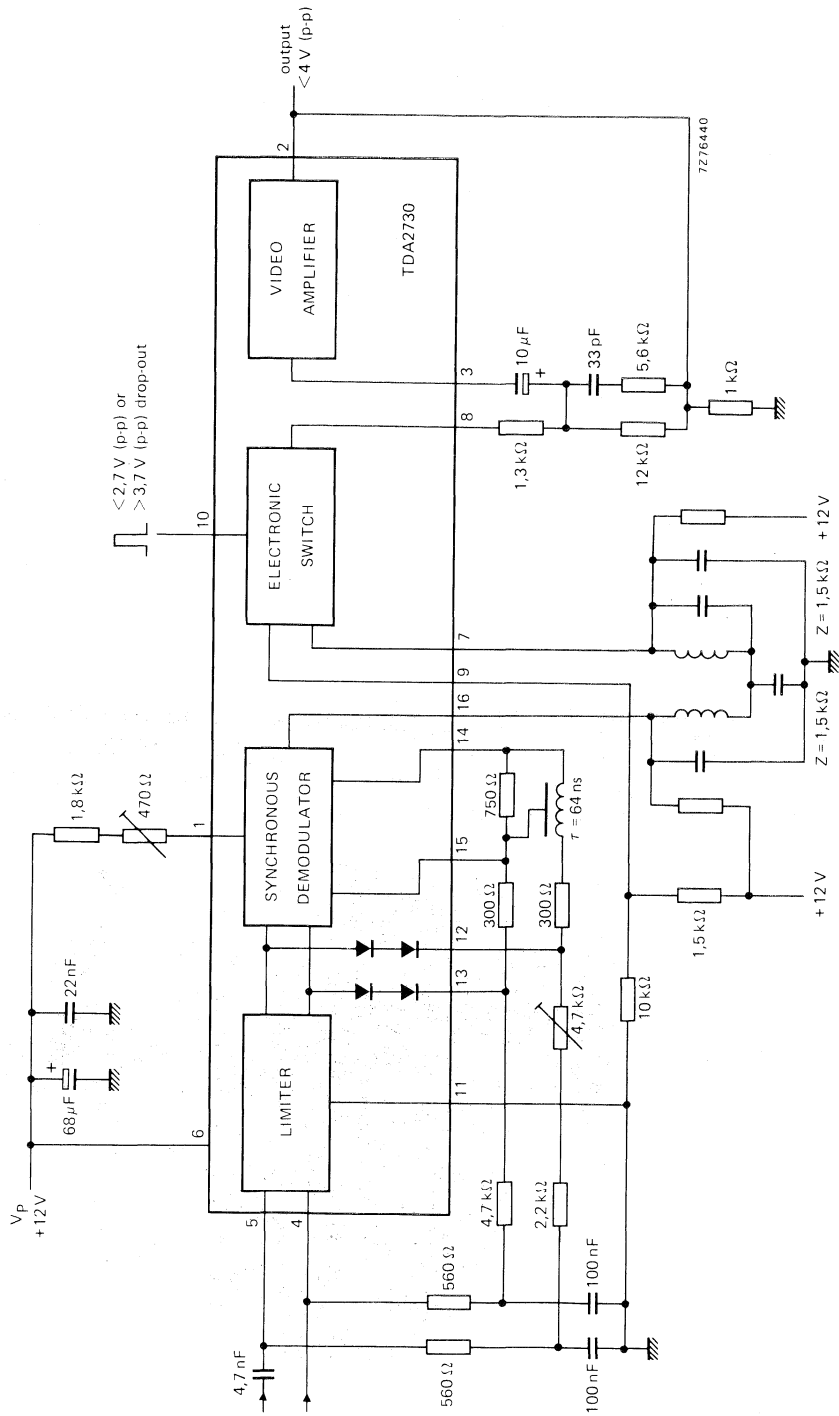


Fig. 1

APPLICATION INFORMATION (continued)

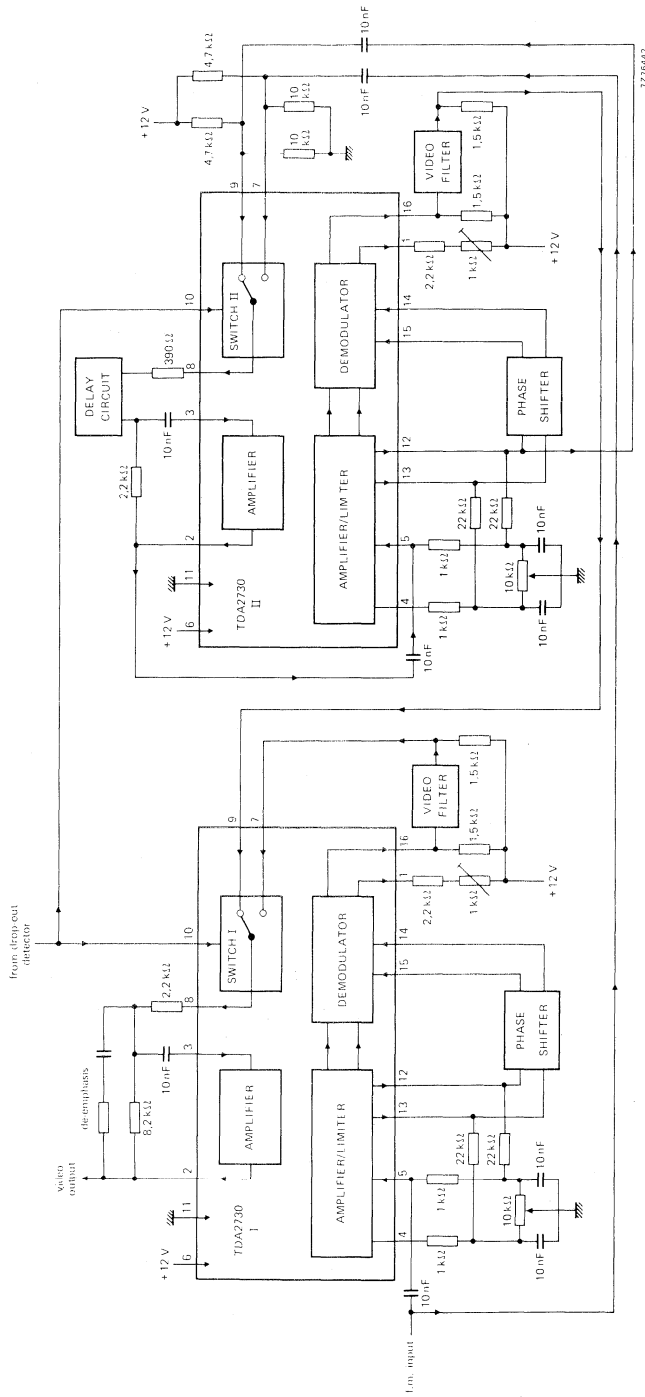


Fig. 2. Drop-out eliminator.

## AMPLIFIER AND DROP-OUT IDENTIFICATION CIRCUIT

### GENERAL DESCRIPTION

The TDA2740 is a monolithic integrated circuit intended for use in colour television receivers. It also can be used, in conjunction with the TDA2730, in the reproduction part of video recorder sets. The circuit incorporates the following functions:

- Electronic switch
- A.G.C. FM amplifier with display drive capability
- Drop-out detector
- Schmitt-trigger for generating a drop-out pulse


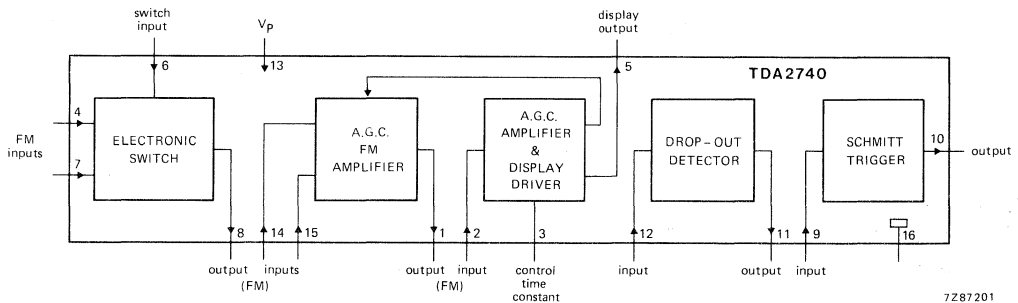


Fig. 1 Block diagram.

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

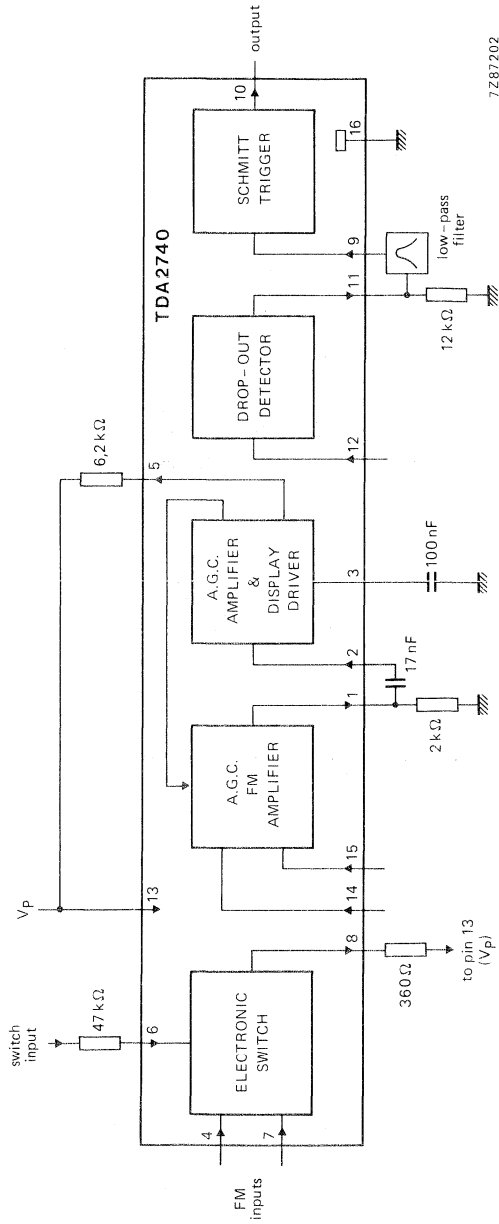

7287202

Fig. 2 Test circuit.



## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 13)	$V_{13-16} = V_p$	max.	13 V
Total power dissipation	$P_{tot}$	max.	780 mW
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		-20 to +90 °C

## CHARACTERISTICS

 $V_p = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; measured in Fig. 2; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage range (pin 13)	$V_p$	11,5	12	13	V
Supply current (pin 13)	$I_p$	30	40	60	mA
<b>Electronic switch</b>					
Input voltages (d.c.)	$V_{4;7-16}$	6,5	7,1	7,5	V
Input impedances	$ Z_{4;7-16} $	—	1	—	k $\Omega$
Input voltages (pin 6)					
for signal from pin 7 to pin 8	$V_6$	0	—	1,7	V
for signal from pin 4 to pin 8	$V_6$	2,7	—	$V_p$	V
Input current (pin 6)	$I_6$	—	—	60	$\mu\text{A}$
Output pin 8		open collector			
Output current (d.c.)	$I_8$	1,3	1,8	2,5	mA
Output voltage	$V_{8-16}$	6,7	—	$V_p$	V
Forward transfer admittance	$ Y_f $	2,45	3,3	4,45	mS
2nd harmonic suppression referred to a sinusoidal signal at pin 4 or 7 of $V_{4;7(p-p)} = 500\text{ mV}$ ; $f = 4\text{ MHz}$	$\alpha$	—	-43	—	dB
<b>A.G.C. amplifier and display driver</b>					
Input voltages (d.c.)	$V_{14;15-16}$	2,3	2,6	2,9	V
Input impedance	$ Z_{14-15} $	—	1,2	—	k $\Omega$
Input voltage range (peak-to-peak value)	$V_{14-15(p-p)}$	6	—	60	mV
Output voltage (peak-to-peak value)	$V_{1(p-p)}$	0,7	1	1,4	V
Open-loop voltage gain at $f = 4\text{ MHz}$	$G_{ov}$	43	46	49	dB
Bandwidth (-3 dB) within control range	B	7	—	—	MHz
Output voltage (d.c.)	$V_{1-16}$	5,0	6,7	8,5	V
Output impedance	$Z_{1-16}$	emitter follower			
Input voltage (d.c.)	$V_{2-16}$	2,2	2,5	2,8	V
Input impedance	$ Z_{2-16} $	—	2,3	—	k $\Omega$
Output pin 5		open collector			

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>A.G.C. amplifier and display driver (continued)</b>					
Display current (pin 5) without input signal	$I_5$	—	—	400	$\mu\text{A}$
with input signal of 60 mV (peak to peak)	$I_5$	—	1,3	—	mA
D.C. voltage at pin 3 without input signal	$V_{3-16}$	1,1	1,5	1,9	V
with input signal	$V_{3-16}$	2,4	2,7	3,2	V
<b>Drop-out detector</b>					
Input voltage (d.c.)	$V_{12-16}$	2,6	2,8	3,0	V
Input impedance	$ Z_{12-16} $	—	1	—	$\text{k}\Omega$
Input voltage (a.c.) (peak-to-peak value) for negative-going threshold ( $t_{PLH}$ )	$V_{12(p-p)}$	9	18	36	mV
for positive-going threshold ( $t_{PHL}$ )	$V_{12(p-p)}$	11	26	60	mV
Output pin 11		open collector			
Maximum output current	$I_{11}$	—	2,3	—	mA
Output current (d.c.) without input signal	$I_{11}$	—	1,3	—	mA
<b>Schmitt-trigger (see Fig. 3)</b>					
Threshold voltage: ON	$V_{9-16}$	10,05	10,15	10,30	V
Threshold voltage: OFF	$V_{9-16}$	9,65	9,80	9,95	V
Input impedance	$ Z_{9-13} $	—	1,2	—	$\text{k}\Omega$
Output voltage HIGH	$V_{10-16H}$	3,7	3,9	4,2	V
Output voltage LOW	$V_{10-16L}$	2,1	2,4	2,7	V
Output impedance	$Z_{10-16}$	emitter follower			

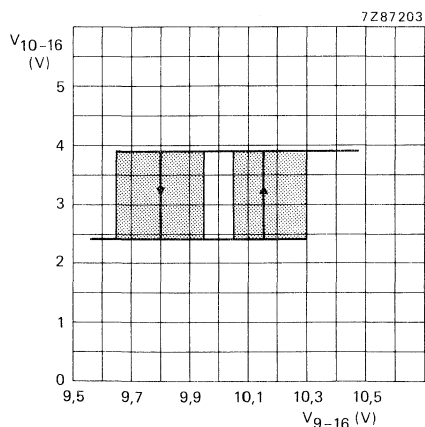


Fig. 3 Schmitt-trigger output voltage as a function of the input voltage.

## TELEVISION SOUND COMBINATION

The TDA2791 contains the following functions:

- Limiter/amplifier
- F.M. detector.
- Physiological d.c. volume control.
- D.C. tone control.

The limiter/amplifier is designed as a four-stage differential amplifier, to obtain good noise and interference suppression. The detector is a balanced quadrature demodulator.

During VTR operation audio signals can be inserted before the tone and volume control circuits. The limiter amplifier and demodulator must be switched off by grounding pin 2. This switching action occurs without a d.c. shift, so that no transients will be noticed in the speaker. The circuit is very flexible in its application because the characteristics of the various controls can be adapted by changing external component values.

## QUICK REFERENCE DATA

Supply voltage	$V_{13-3}$	typ.	12 V
Total current drain	$I_{13}$	typ.	61 mA
Frequency	$f_o$		5,5 MHz
Input voltage at start of limiting (r.m.s. value)	$V_{i(rms)}$	typ.	100 $\mu$ V
A.M. rejection at $V_i = 5$ mV	$\alpha$	typ.	60 dB
A.F. output voltage at $\Delta f = \pm 27$ kHz (r.m.s. value) (at pin 7 after de-emphasis)	$V_{o(rms)}$	typ.	700 mV
D.C. bass control range		<	+ 16 -19 dB
D.C. treble control range		<	+ 12 -15 dB
D.C. volume control range		>	-75 dB

## PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

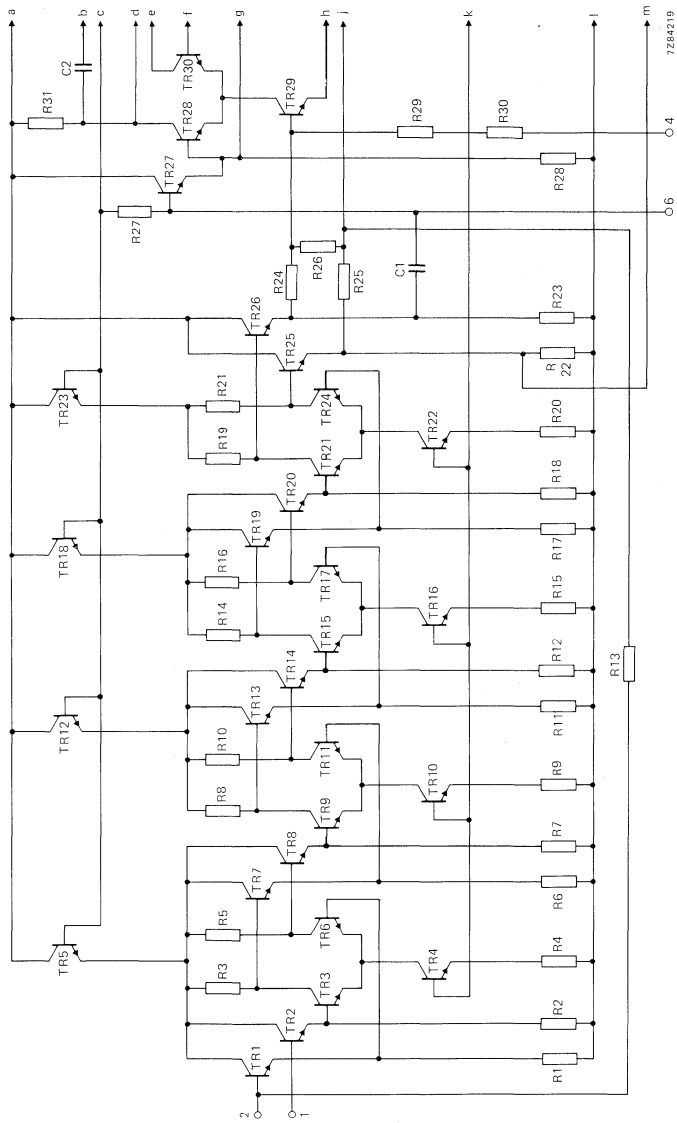


Fig. 1a Circuit diagram; continued in Fig. 1b.

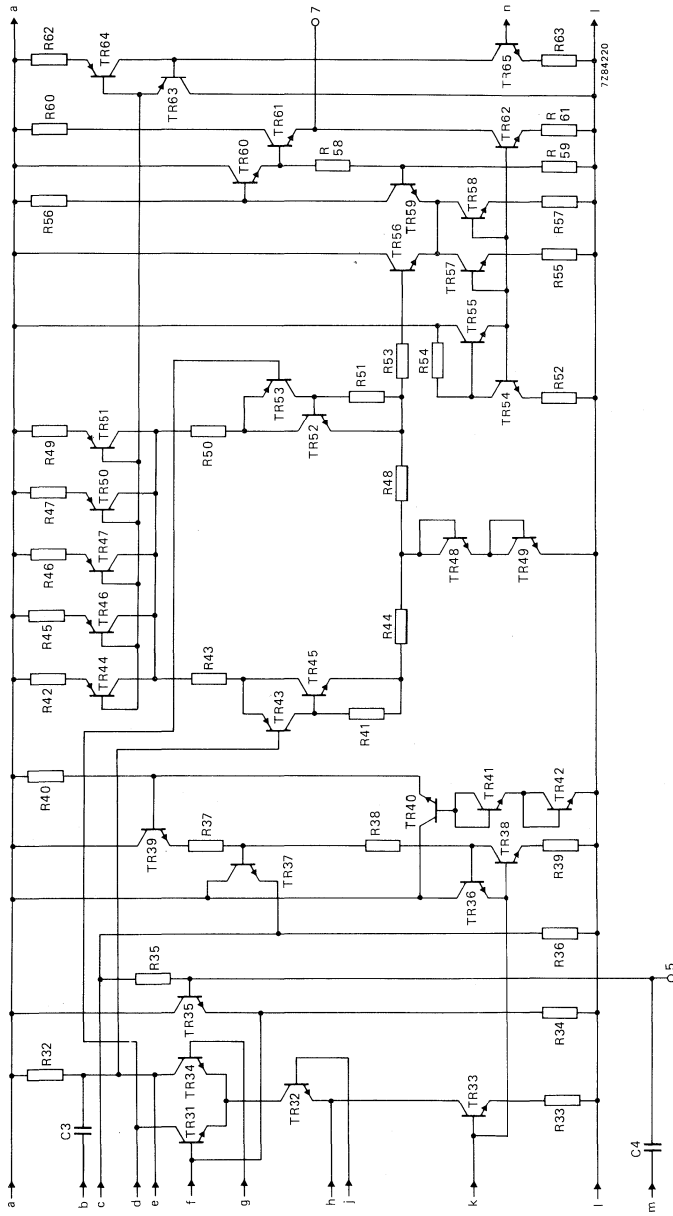


Fig. 1b Circuit diagram; continued from Fig. 1a; continued in Fig. 1c, for line 'n' see Fig. 1d.

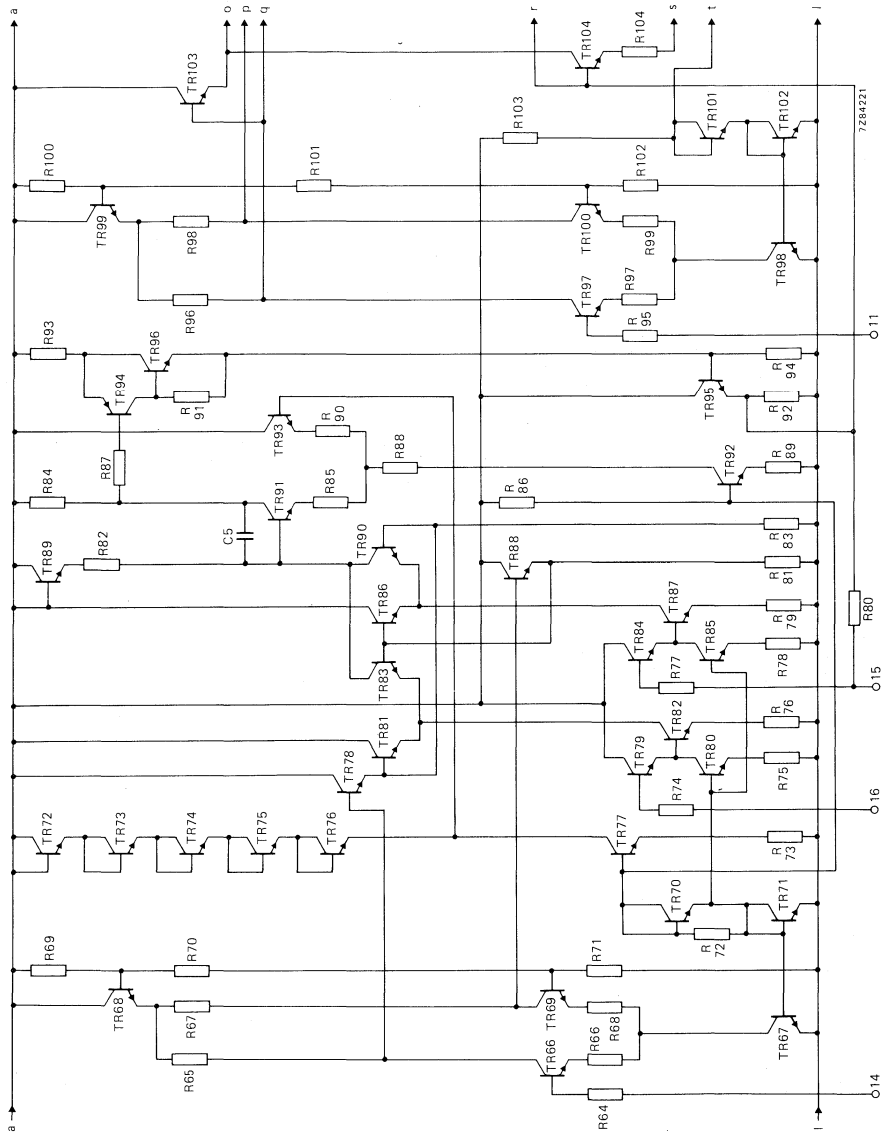


Fig. 1c Circuit diagram; continued from Fig. 1b; continued in Fig. 1d.

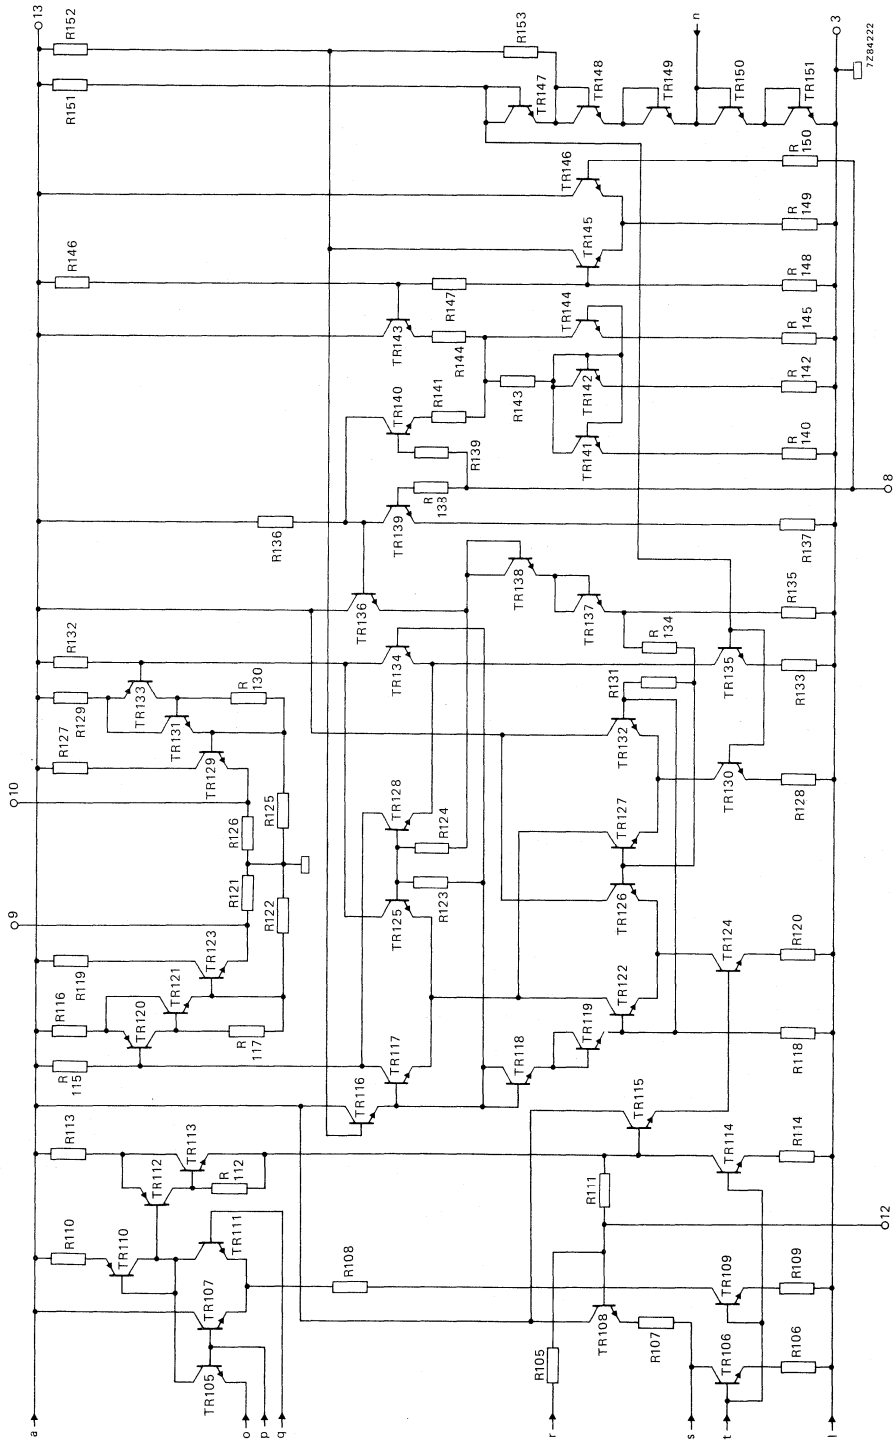


Fig. 1d Circuit diagram; continued from Fig. 1c and Fig. 1b.

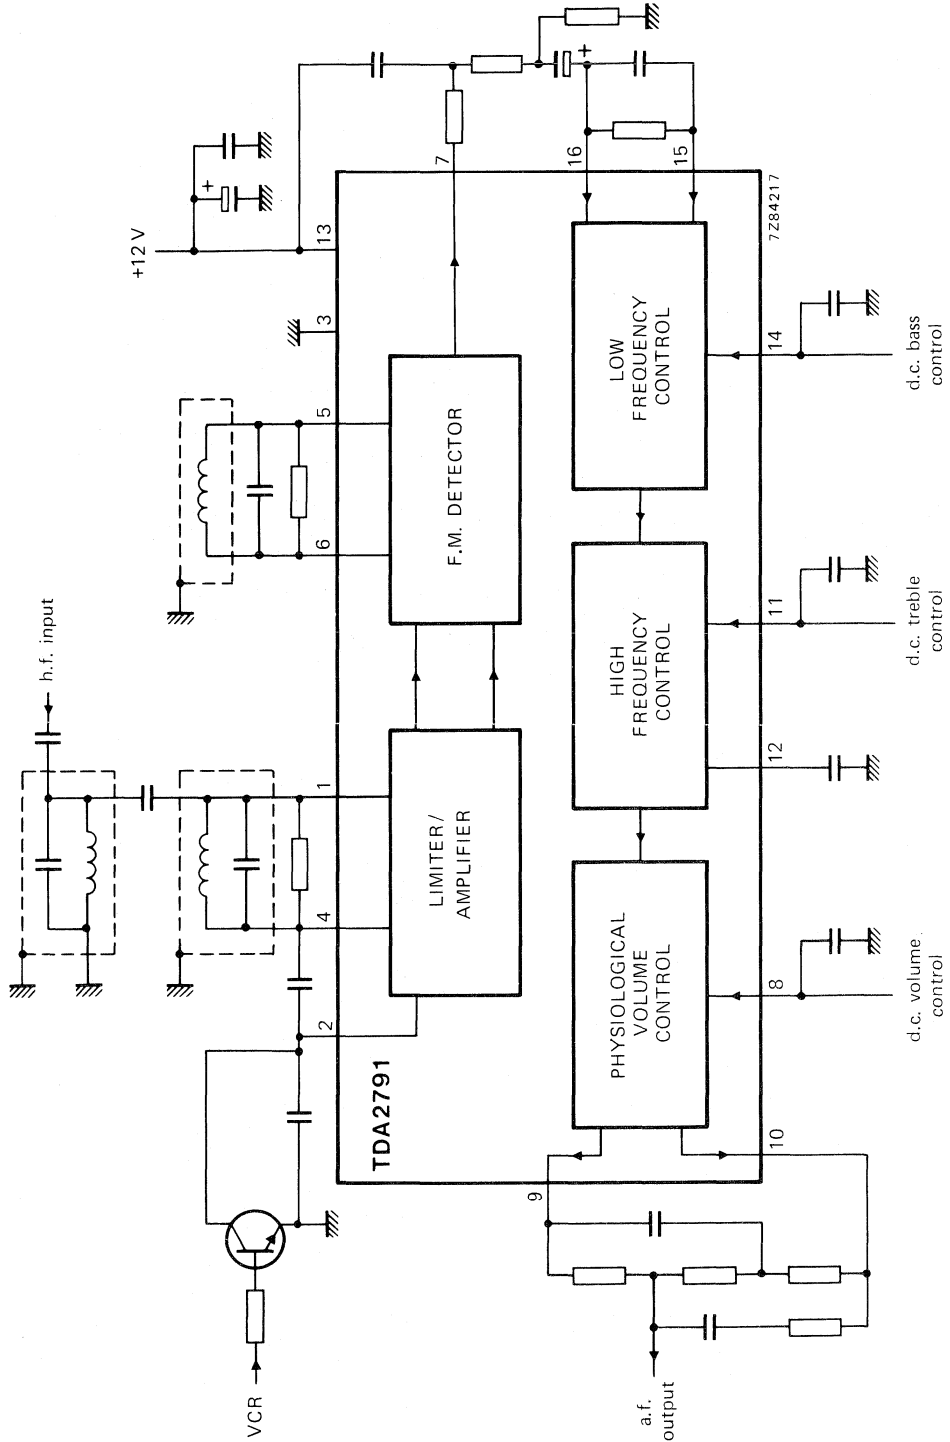


Fig. 2 Block diagram.



## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

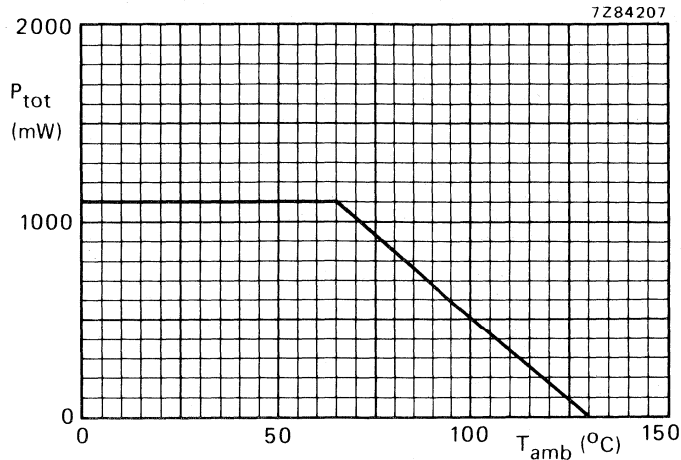
Supply voltage  $V_{13-3}$  max. 13,2 V

Fig. 3 Power derating curve.

Storage temperature	$T_{stg}$	-25 to +130 $^{\circ}C$
Operating ambient temperature	$T_{amb}$	-25 to +65 $^{\circ}C$

## CHARACTERISTICS

Measured in Fig. 9 at  $T_{amb} = 25^{\circ}C$ ;  $V_{13-3} = 12 V$ ;  $f = 5,5 MHz$  (unless otherwise specified)

Supply voltage range	$V_{13-3}$	10,8 to 13,2 V
Total current drain	$I_{13}$	43 to 79 mA

## Limiter/amplifier/demodulator (note 1)

Input limiting voltage at $V_{7-3} = -3 dB$ (r.m.s. value)	$V_{i(rms)}$	typ.	100 $\mu V$
Input impedance	$ Z_{1-3} $	typ.	200 k $\Omega$

## A.M. rejection

$V_i = 0,5 mV$	} note 2	$\alpha$	typ.	50 dB
$V_i = 1 mV$		$\alpha$	typ.	50 dB
$V_i = 5 mV$		$\alpha$	typ.	60 dB
$V_i = 50 mV$		$\alpha$	typ.	55 dB

## A.F. output voltage at pin 7 (r.m.s. value)

$f_m = 1 kHz$ ; $\Delta f = \pm 27 kHz$ ; $V_i = 5 mV$ ; $Q_{L3} = 12,5$	$V_{O(rms)}$	typ.	700 mV
--	--------------	------	--------

## Notes

- The quadrature reference circuit must be tuned in such a way that there is no difference in the demodulator d.c. output voltage when the limiter input is switched from signal to no signal.
- See test set-up Fig. 4.

**CHARACTERISTICS** (continued)

Total harmonic distortion at pin 7

 $f_m = 1 \text{ kHz}; \Delta f = \pm 27 \text{ kHz}; V_i = 5 \text{ mV}$  $d_{\text{tot}}$  typ. 0,35 %Zero-point stability at 30  $\mu\text{V}$  to 10 mV; pin 7

typ. 2 kHz

Hum suppression; pin 7

typ. 20 dB

Signal-to-noise ratio at pin 7

 $f_m = 1 \text{ kHz}; \Delta f = \pm 27 \text{ kHz}; V_i = 5 \text{ mV}$  (note 1)

S/N typ. 63 dB

Demodulator output impedance

 $|Z_{7-3}|$  typ. 25  $\Omega$ **A.F. amplifier**

Input voltage bass control circuit at pin 16 (r.m.s. value)

at  $\Delta f = \pm 27 \text{ kHz}$  $V_{i(\text{rms})}$  typ. 215 mV

Bass control

see graph, Fig. 5

Input impedance

 $|Z_{14-3}|$  typ. 500 k $\Omega$ 

Treble control

see graph, Fig. 6

Input impedance

 $|Z_{11-3}|$  typ. 500 k $\Omega$ 

Control voltages for flat frequency characteristic

 $V_{11-3}$  typ. 3,2 V $V_{14-3}$  typ. 3,2 V

Volume control

see graph, Fig. 7

Input current at  $V_{8-3} = 4 \text{ V}$  $I_g$  typ. 40  $\mu\text{A}$ 

Physiological volume control (bass and treble compensation)

see graph, Fig. 8

Voltage gain of audio part

 $f = 1 \text{ kHz}; V_{11-3} = 3,2 \text{ V}; V_{14-3} = 3,2 \text{ V}; V_{8-3} = 4 \text{ V}$  $G_v$  typ. 4 dB

D.C. volume control range

&gt; -75 dB

Weighted signal-to-noise ratio

 $V_{i(\text{rms})} = 215 \text{ mV}; -24 \text{ dB}$  volume control (notes 1 and 2)

typ. 56 dB

Total harmonic distortion at output

 $f = 1 \text{ kHz}; V_{i(\text{rms})} = 215 \text{ mV}$ 

(related to max. output; note 2) at:

0 dB

 $d_{\text{tot}}$  typ. 0,2 %

-20 dB

 $d_{\text{tot}}$  typ. 0,4 %

## Notes

1. Specified according to DIN 45405; weighted noise (peak value).
2. Measured at flat-tone control characteristics.

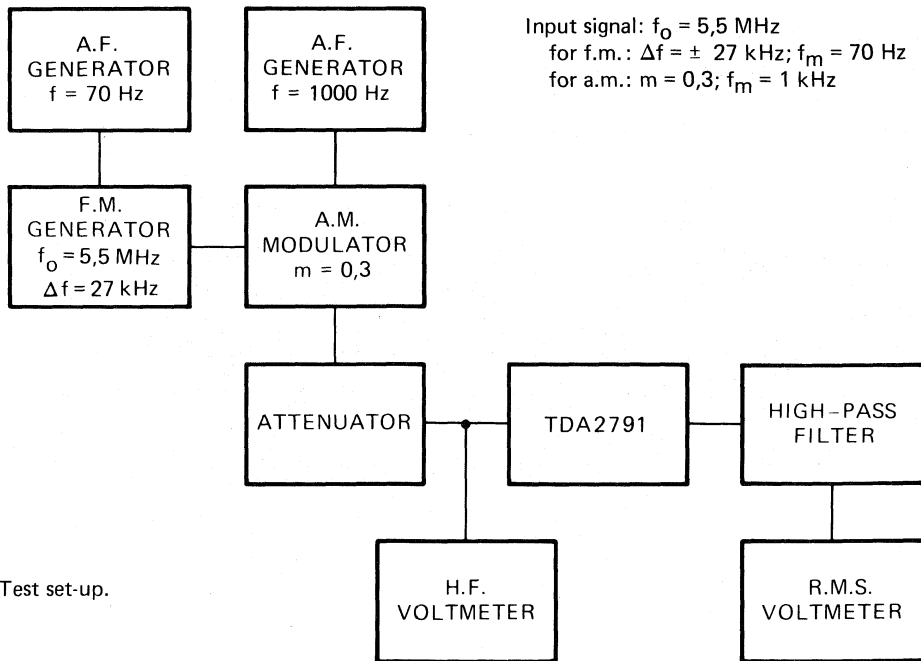


Fig. 4 Test set-up.

7Z84218

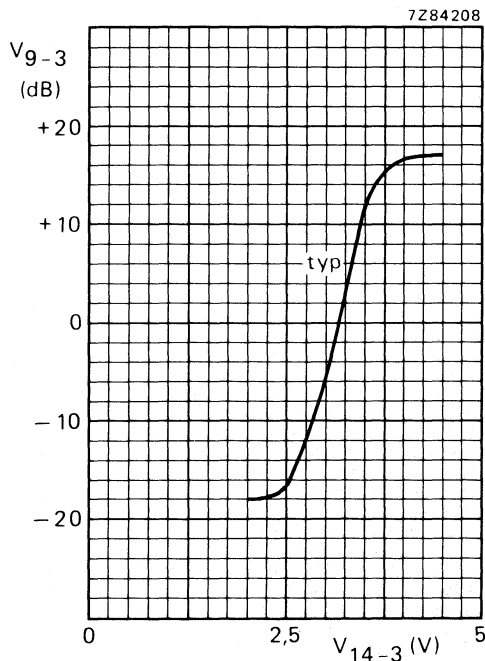


Fig. 5 Bass control curve;  $f = 40 \text{ Hz}$ ;  
 $V_{11-3} = 3,2 \text{ V}$ ;  $V_{8-3} = 4 \text{ V}$ .


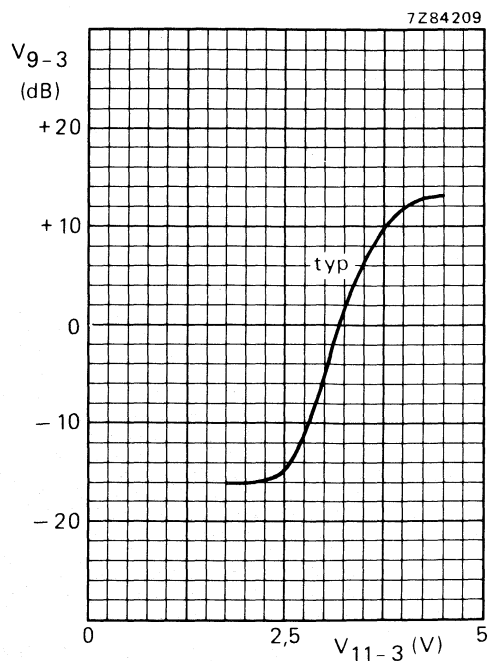


Fig. 6 Treble control curve;  $f = 15 \text{ kHz}$ ;  
 $V_{14-3} = 3,2 \text{ V}$ ;  $V_{8-3} = 4 \text{ V}$ .

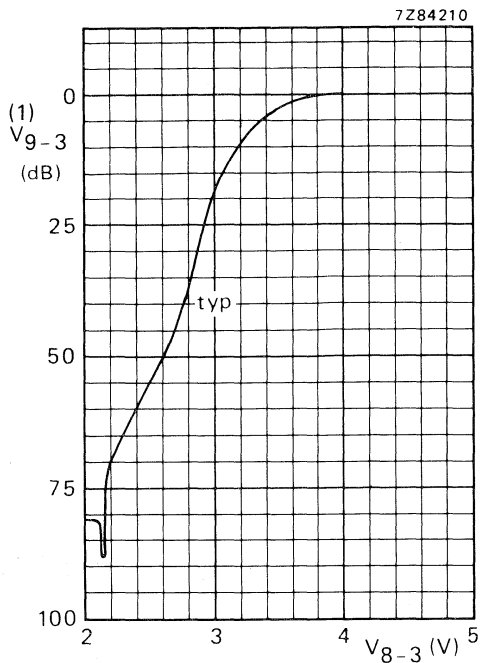

(1) This is actually the a.f. output voltage as shown in Fig. 9.

Fig. 7 Volume control curve;  $f = 1 \text{ kHz}$ .  
 $V_{14-3} = 3,2 \text{ V}$ ;  $V_{11-3} = 3,2 \text{ V}$ .


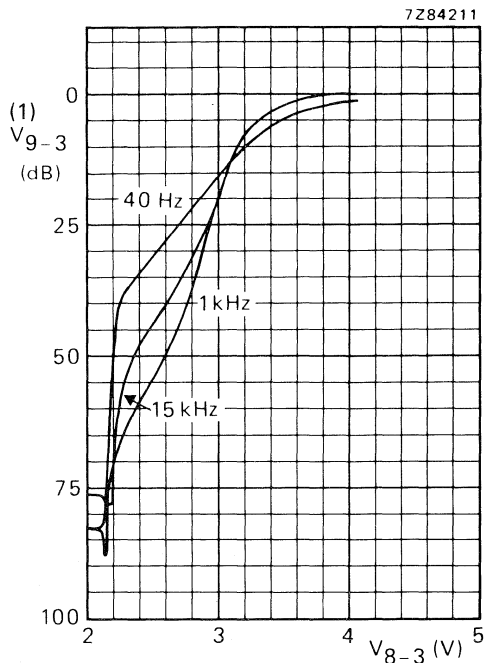


Fig. 8 Physiological volume control curves  
 (typical values);  $V_{14-3} = 3,2 \text{ V}$ ;  $V_{11-3} = 3,2 \text{ V}$ .

#### APPLICATION INFORMATION

The function is quoted against the corresponding pin number

1. Limiter input.
2. The decoupling capacitor for the internal limiter feedback is connected to this pin.
3. Negative supply (ground).
4. Limiter output for external feedback to pin 1.
- 5 and 6. External tank circuit (demodulator reference signal).
7. Demodulator output.
8. D.C. volume control.
- 9 and 10. External circuit for physiological volume control.
11. D.C. treble control.
12. External capacitor for treble control.
13. Positive supply.
14. D.C. bass control.
- 15 and 16. External circuit for bass control.

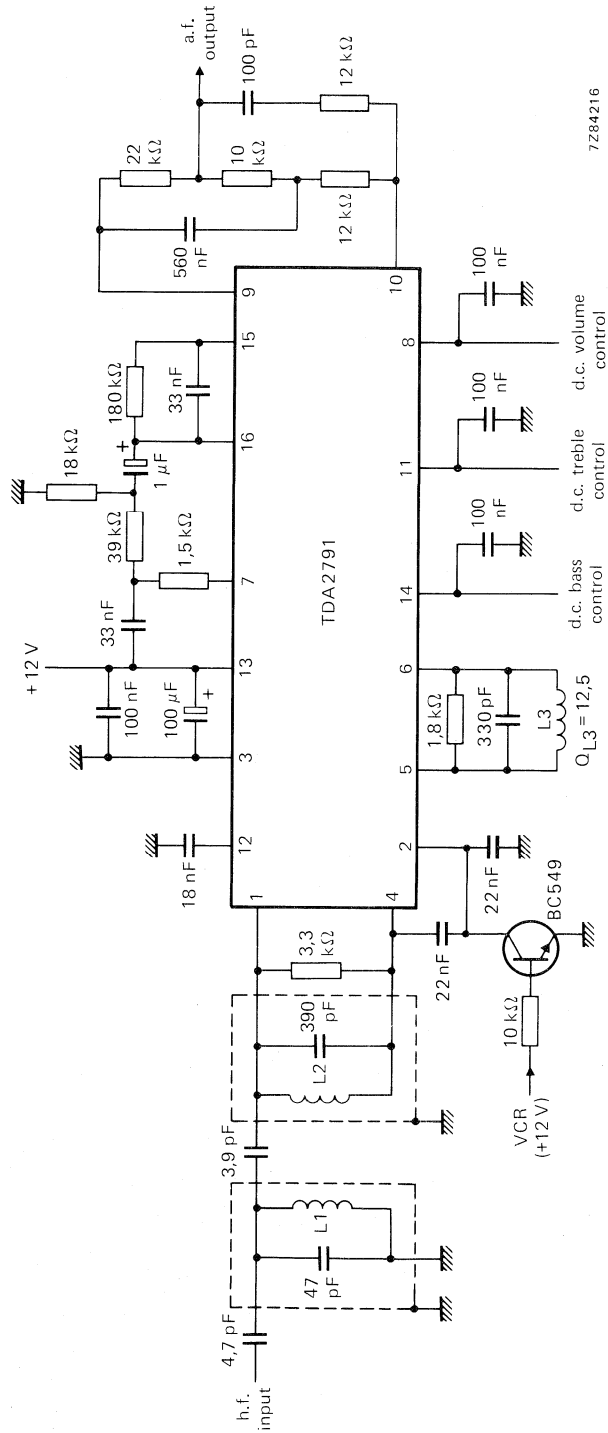

7Z84216

Fig. 9 Application circuit diagram.



## TV STEREO/DUAL SOUND IDENTIFICATION DECODER

The TDA2795 is a monolithic integrated circuit for stereo/dual sound in television receivers.

The circuit incorporates the following functions:

- Controlled pilot signal amplifier.
- Envelope demodulator.
- Two separate signal paths for processing the identification frequencies: operational amplifier for active filter, integral evaluation circuit with TTL compatible 'open collector' outputs.
- Stereo indicator driver.

### QUICK REFERENCE DATA

Supply voltage	$V_S$	typ.	12 V
Supply current	$I_S$	typ.	8 mA
Nominal input voltage at $f = 54,6875$ kHz	$V_i$	typ.	10 mV
Input impedance	$ Z_i $	$\geq$	500 k $\Omega$
Operational amplifier			
open loop voltage gain at 200 Hz	$G_o$	$\geq$	78 dB
input resistance	$R_i$	$\geq$	1 M $\Omega$
output resistance	$R_o$	$\leq$	3,5 k $\Omega$
Supply voltage range	$V_S$		10,8 to 13,2 V
Operating ambient temperature range	$T_{amb}$		0 to + 70 °C

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

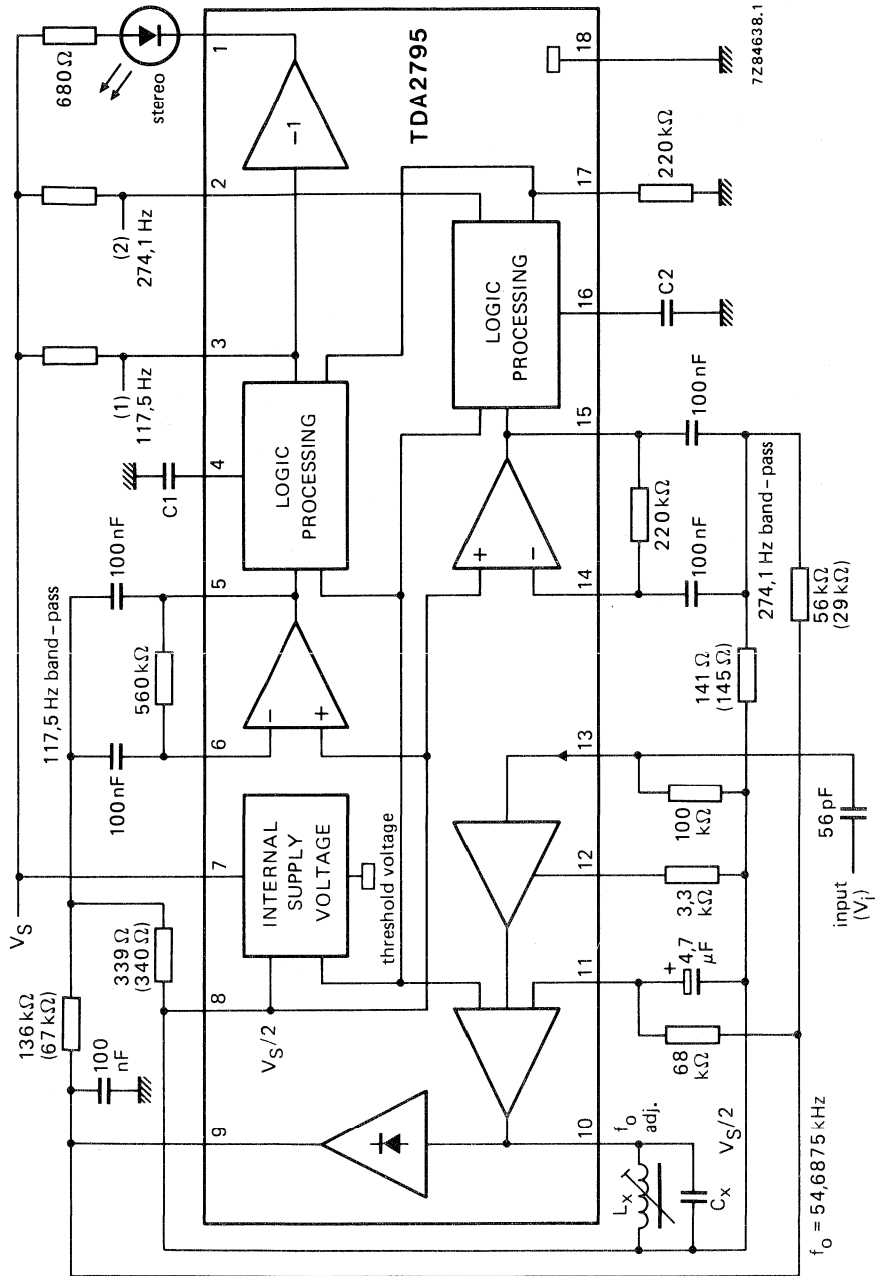


Fig. 1 Block diagram; C1 and C2 values 22 to 150 nF (dependent on switching time); values given in parenthesis are for G = 4 at 117,5/274,1 Hz; C<sub>x</sub> = 3,3 nF.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 7)	$V_{7-18} = V_S$	max.	15 V
Signal input (pin 13)	$V_{13-18}$	max.	$V_S$ V
	$-V_{13-18}$	max.	0,5 V
Switch outputs (pins 1, 2 and 3)	$V_{1-18}$	max.	18 V
	$I_1$	max.	50 mA
	$V_{2;3-18}$	max.	15 V
	$I_{2;3}$	max.	5 mA
	$-V_{1;2;3-18}$	max.	0,5 V
	$P_{tot}$	max.	800 mW
Total power dissipation	$P_{tot}$	max.	800 mW
Storage temperature range	$T_{stg}$		-25 to +125 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

**CHARACTERISTICS**

$V_S = 12$  V;  $T_{amb} = 25$  °C, unless otherwise specified; measured in Fig. 1, at  $V_i = 10$  mV;  $f = 54,6875$  kHz amplitude modulated with  $f_{m1} = 117,5$  Hz or  $f_{m2} = 274,1$  Hz;  $m_1 = m_2 = 50\%$ .

Supply voltage range	$V_S$	10,8 to 13,2 V	
Supply current	$I_S$	typ.	8 mA
		≤	12 mA

**Pilot signal amplifier and envelope demodulator**

Maximum input voltage (peak-to-peak value)	$V_i(p-p)$	typ.	2 V
Input impedance	$ Z_{13-18} $	≥	500 kΩ
Voltage gain ( $V_{9-18}/V_{13-18}$ ) at $V_i = 1$ mV	$G_{V9-13}$	typ.	42 dB
Start of control at $V_i$	see Fig. 3		
Control range	$\Delta G_V$	≥	40 dB
Controlled output voltage (r.m.s. value) (pin 9)	$V_{O(rms)}$	typ.	550 mV

**Operational amplifiers**

Input bias current (pins 6 and 14)	$\pm I_6; \pm I_{14}$	≤	70 nA
Open loop voltage gain at $f = 200$ Hz	$G_o$	≥	78 dB
Available output current (pins 5 and 15)	$\pm I_5; \pm I_{15}$	≥	1,5 mA
Output resistance (pins 5 and 15)	$R_o$	typ.	2 kΩ
		≤	3,5 kΩ
Allowable load capacitance	$C_L$	≤	30 pF
Output offset voltage at $R_{5-6} = 560$ kΩ	$\pm V_{o5-8}$	≤	70 mV

**CHARACTERISTICS** (continued)**Evaluation circuitry**

Switch-on threshold voltage (pins 5 and 15)	$V_5; V_{15}$	typ.	1,0 V
Switch hysteresis	$\frac{V_{5on}}{V_{5off}} = \frac{V_{15on}}{V_{15off}}$	typ.	$3,8 \pm 0,5$ dB
Switch outputs (pins 2 and 3)			
allowable output current	$I_3; I_2$	$\leq$	2 mA
saturation voltage at $I_3 = I_2 = 1,5$ mA	$V_{3;2-18sat}$	$\leq$	0,35 V
leakage voltage at $I_3 = I_2 \leq 5$ $\mu$ A	$V_{3;2-18}$	$\leq$	15 V
Indicator driver (pin 1)			
allowable output current	$I_1$	$\leq$	40 mA
saturation voltage at $I_1 = 20$ mA	$V_{1-18sat}$	$\leq$	0,8 V
leakage voltage at $I_1 < 10$ $\mu$ A	$V_{1-18}$	$\leq$	18 V

**Internal reference voltage**

Reference voltage (pin 8)	$V_{8-18}$	typ.	6 V
Available output current (pin 8)	$-I_8$	$\geq$	2 mA
	$+I_8$	$\geq$	0,6 mA

**Reference current source**

Reference voltage (pin 17)	$V_{17-18}$	typ.	5,3 V
Internal bias resistor	$R_{i17}$	typ.	5 k $\Omega$
Allowable load resistor (pin 17)	$R_L$		180 to 270 k $\Omega$

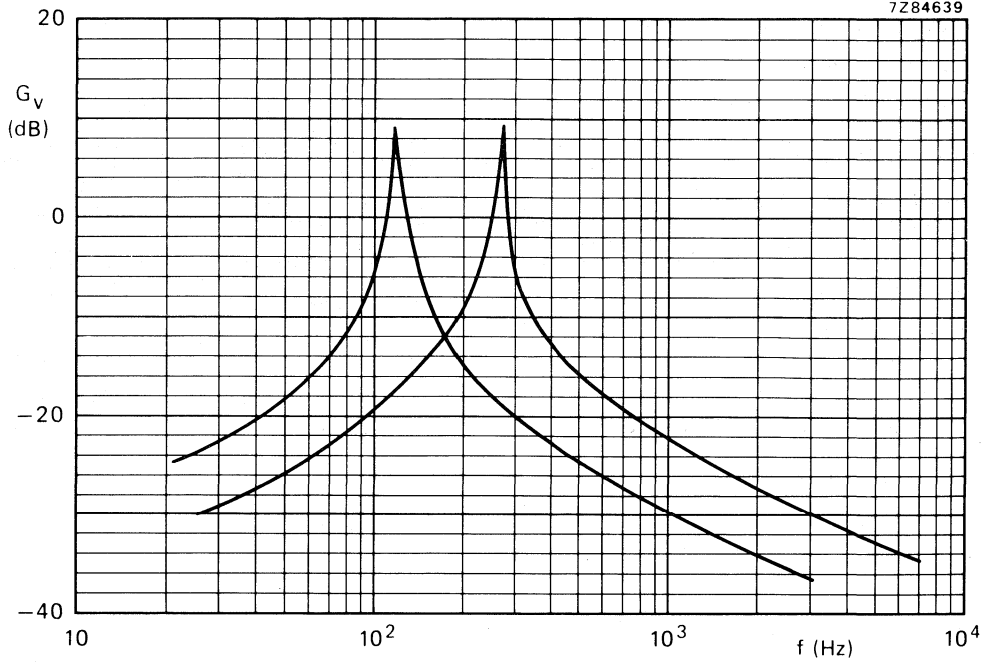


Fig. 2 Band-pass curves for 117,5 Hz and 274,1 Hz.

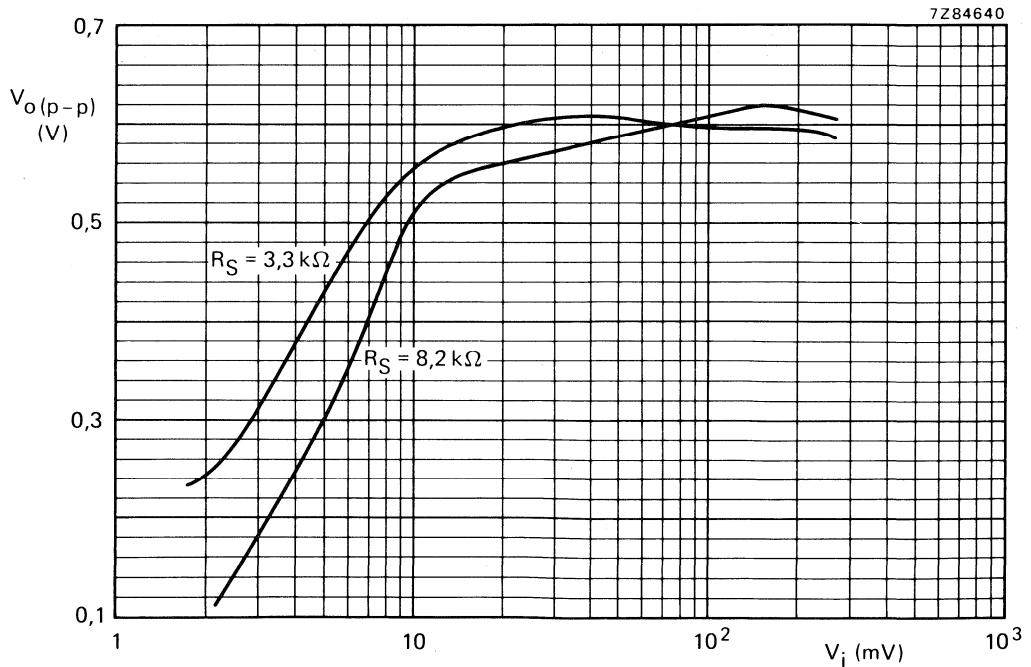



Fig. 3 Controlled output voltage as a function of the input signal ( $Q_o = 80$ ); pilot frequency  $f_o = 54,6875$  kHz;  $R_S$  is source resistance.

## GENERAL FILTER CALCULATIONS

## 1. Gain

Amplifier conditions:  $G_o \gg G_v$  and  $G_o \gg 2 \cdot Q^2$

$$G_v = - \frac{\frac{p}{R1 \cdot C1}}{p^2 + p \frac{C1 + C2}{R3 \cdot C1 \cdot C2} + \frac{R1 + R2}{R1 \cdot R2 \cdot R3 \cdot C1 \cdot C2}}, \text{ in which: } p = j\omega; G_v = \frac{V_o}{V_i}$$

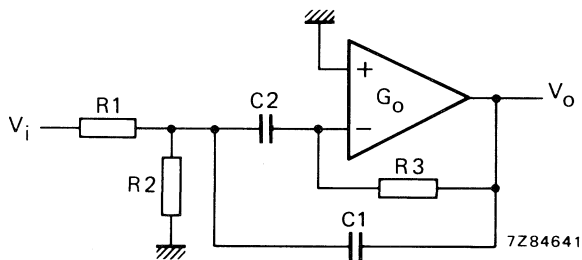

## 2. Resonance frequency

$$\omega_r = \frac{1}{\sqrt{\frac{R1 \cdot R2}{R1 + R2} \cdot R3 \cdot C1 \cdot C2}}$$

3. Gain at  $\omega = \omega_r$ 

$$-G_{vr} = \frac{C2}{C1 + C2} \cdot \frac{R3}{R1}$$

## 4. Quality

$$Q = \frac{\sqrt{C1 \cdot C2}}{C1 + C2} \cdot \sqrt{\frac{R3 (R1 + R2)}{R1 \cdot R2}}$$

## 5. Recommended components

C1 and C2: 5% MKC (metallized polycarbonate film capacitor)

R1, R2 and R3: 2% MR (metal film resistor)

or:

C1 and C2: 5% MKT (metallized polyester film capacitor)

R1, R2 and R3: 2% CR (carbon film resistor)

## INFRARED RECEIVER

The TDA3047 is for infrared reception with low power consumption.  
The difference between the TDA3047 and TDA3048 is the polarity of the output signal.

### Features

- H.F. amplifier with a control range of 66 dB
- Synchronous demodulator and reference amplifier
- A.G.C. detector
- Pulse shaper
- Q-factor killing of the input selectivity, which is controlled by the a.g.c. circuit
- Input voltage limiter

### QUICK REFERENCE DATA

Supply voltage (pin 8)	$V_P = V_{8-16}$	typ.	5 V
Supply current (pin 8)	$I_P = I_8$	typ.	2,1 mA
Input signal (peak-to-peak value) (100% AM; $f = 36$ kHz)	$V_{2-15(p-p)}$		0,03 to 200 mV
Output signal (peak-to-peak value)	$V_{9-16(p-p)}$	typ.	4,5 V

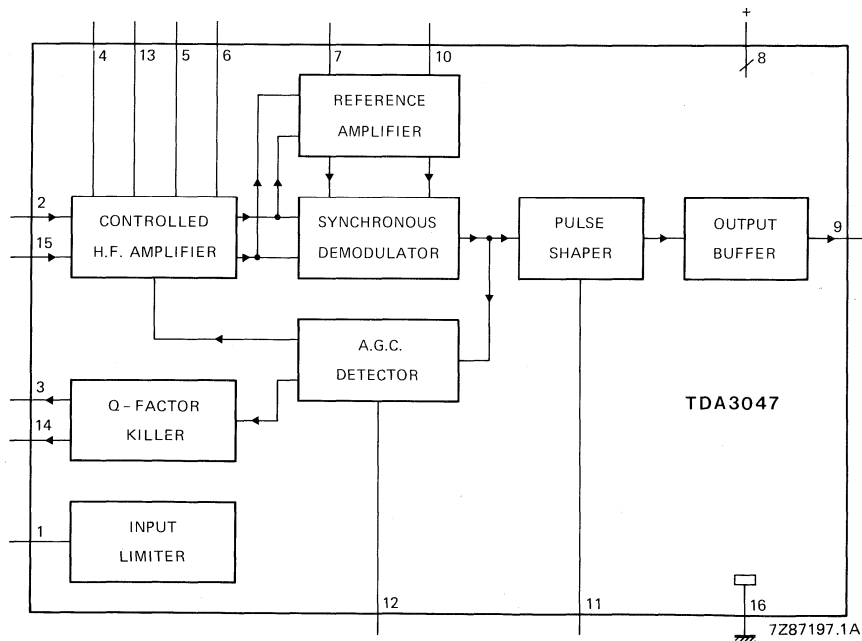


Fig. 1 Block diagram of TDA3047.

### PACKAGE OUTLINES

TDA3047P: 16-lead DIL; plastic (SOT-38).

TDA3047T: 16-lead mini-pack; plastic (SO-16L; SOT-162A).

## FUNCTIONAL DESCRIPTION

### General

The circuit operates from a 5 V supply and has a current consumption of 2 mA. The output is a current source which can drive or suppress a current of  $> 75 \mu\text{A}$  with a voltage swing of 4,5 V. The Q-killer circuit eliminates distortion of the output pulses due to the decay of the tuned input circuit at high input voltages. The input circuit is protected against signals of  $> 600 \text{ mV}$  by an input limiter. The typical input is an AM signal at a frequency of 36 kHz. Figures 3 and 4 show the circuit diagrams for the application of narrow-band and wide-band receivers respectively. Circuit description of the eight sections shown in Fig. 1 are given below.

### Controlled h.f. amplifier

The input signal is amplified by the gain-controlled amplifier. This circuit comprises three d.c. amplifier stages connected in cascade. The overall gain of the circuit is approximately 83 dB and the gain control range is in the order of 66 dB. Gain control is initially active in the second amplifier stage and is transferred to the first stage as limiting in the second stage occurs, thus maintaining optimum signal-to-noise ratio. Offset voltages in the d.c. coupled amplifier are minimized by two negative feedback loops; these also allow the circuit to have some series resistance of the decoupling capacitor. The output signal of the amplifier is applied to the reference amplifier and to the synchronous demodulator inputs.

### Reference amplifier

The reference amplifier amplifies and limits the input signal. The voltage gain is approximately 0 dB. The output signal of this amplifier is applied to the synchronous demodulator.

### Synchronous demodulator

In the synchronous demodulator the input signal and reference signal are multiplied. The demodulator output current is  $25 \mu\text{A}$  peak-to-peak. The output signal of the demodulator is fed to the input of the a.g.c. detector and to the input of the pulse-shaper circuit.

### A.G.C. detector

The a.g.c. detector comprises two n-p-n transistors operating as a differential pair. The top level of the output signal from the synchronous demodulator is detected by the a.g.c. circuit. Noise pulses are integrated by an internal capacitor. The output signal is amplified and applied to the first and second stages of the amplifier and to the Q-factor killer circuit.

### Pulse-shaper

The pulse-shaper comprises two n-p-n transistors operating as a differential pair connected in parallel with the a.g.c. differential pair. The slicing level of the pulse shaper is lower than the slicing level of the a.g.c. detector. The output of the pulse-shaper is determined by the voltage of the capacitor connected to pin 11, which is applied directly to the output buffer.

### Output buffer

The voltage of the pulse-shaper capacitor is fed to the base of the first transistor of a differential pair. To obtain a correct RC-5 code, a hysteresis circuit protects the output against spikes. The output at pin 9 is active *high*.

### Q-factor killer

Figure 3 shows the Q-factor killer in the narrow-band application. In this application it is necessary to decrease the Q-factor of the input selectivity particularly when large input signals occur at pins 2 and 15. In the narrow-band application the output of the Q-factor killer can be directly coupled to the input; pin 3 to pin 2 and pin 14 to pin 15.

**Input limiter**

In the narrow-band application high voltage peaks can occur on the input of the selectivity circuit. The input limiter limits these voltage peaks to approximately 0,7 V. Limiting is 0,9 V max. at  $I_1 = 3 \text{ mA}$ .

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 8)	$V_P = V_{8-16}$	max.	13,2 V
Output current pulse shaper (pin 11)	$I_{11}$	max.	10 mA
Voltages between pins*			
pins 2 and 15	$V_{2-15}$	max.	4,5 V
pins 4 and 13	$V_{4-13}$	max.	4,5 V
pins 5 and 6	$V_{5-6}$	max.	4,5 V
pins 7 and 10	$V_{7-10}$	max.	4,5 V
pins 9 and 11	$V_{9-11}$	max.	4,5 V
Storage temperature range	$T_{stg}$		-65 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-25 to + 125 °C

\* All pins except pin 11 are short-circuit protected.

## CHARACTERISTICS

$V_P = V_{8-16} = 5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in Fig. 4; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 8)</b>					
Supply voltage	$V_P = V_{8-16}$	4,65	5,0	5,35	V
Supply current	$I_P = I_8$	1,2	2,1	3,0	mA
<b>Controlled h.f. amplifier (pins 2 and 15)</b>					
Minimum input signal (peak-to-peak value) at $f = 36 \text{ kHz}$ (note 1)	$V_{2-15(p-p)}$	—	15	25	$\mu\text{V}$
at $f = 36 \text{ kHz}$ (note 2)	$V_{2-15(p-p)}$	—	—	5	$\mu\text{V}$
A.G.C. control range (without Q-killing)		60	66	—	dB
Input signal for correct operation (peak-to-peak value; note 3)	$V_{2-15(p-p)}$	0,03	—	200	mV
Q-killing inactive ( $I_3 = I_{14} < 0,5 \mu\text{A}$ ) (peak-to-peak value)	$V_{2-15(p-p)}$	—	—	140	$\mu\text{V}$
Q-killing active ( $I_{14} = I_3 = \text{max.}$ ) (peak-to-peak value)	$V_{2-15(p-p)}$	28	—	—	mV
Q-killing range		see Fig. 2			
<b>Inputs</b>					
Input voltage (pin 2)	$V_{2-16}$	2,25	2,45	2,65	V
Input voltage (pin 15)	$V_{15-16}$	2,25	2,45	2,65	V
Input resistance (pin 2)	$R_{2-15}$	10	15	20	$\text{k}\Omega$
Input capacitance (pin 2)	$C_{2-15}$	—	3	—	pF
Input limiting (pin 1) at $I_1 = 3 \text{ mA}$	$V_{1-16}$	—	0,8	0,9	V
<b>Outputs</b>					
Output voltage <i>high</i> (pin 9) at $-I_9 = 75 \mu\text{A}$	$-V_{9-8}$	—	0,1	0,5	V
Output voltage <i>low</i> (pin 9) at $I_9 = 75 \mu\text{A}$	$V_{9-16}$	—	0,1	0,5	V
Output current; output voltage <i>high</i> at $V_{9-16} = 4,5 \text{ V}$	$-I_9$	75	120	—	$\mu\text{A}$
at $V_{9-16} = 3,0 \text{ V}$	$-I_9$	75	130	—	$\mu\text{A}$
at $V_{9-16} = 1,0 \text{ V}$	$-I_9$	75	140	—	$\mu\text{A}$
Output current; output voltage <i>low</i> at $V_{9-16} = 0,5 \text{ V}$	$-I_9$	75	120	—	$\mu\text{A}$
Output resistance between pins 7 and 10	$R_{7-10}$	3,1	4,7	6,2	$\text{k}\Omega$

## Notes

1. Voltage pin 9 is *high*;  $-I_9 = 75 \mu\text{A}$ .
2. Voltage pin 9 remains *low*.
3. Undistorted output pulse with 100% AM input.



parameter	symbol	min.	typ.	max.	unit
<b>Pulse shaper (pin 11)</b>					
Trigger level in positive direction (voltage pin 9 changes from <i>high</i> to <i>low</i> )	$V_{11-16}$	3,75	3,9	4,05	V
Trigger level in negative direction (voltage pin 9 changes from <i>low</i> to <i>high</i> )	$V_{11-16}$	3,4	3,55	3,7	V
Hysteresis of trigger levels	$\Delta V_{11-16}$	0,25	0,35	0,45	V
<b>A.G.C. detector (pin 12)</b>					
A.G.C. capacitor charge current	$-I_{12}$	3,4	5,0	6,6	$\mu A$
A.G.C. capacitor discharge current	$I_{12}$	67	100	133	$\mu A$
<b>Q-factor killer (pins 3 and 14)</b>					
Output current (pin 3) at $V_{12-16} = 2\text{ V}$	$-I_3$	2,5	7,5	20	$\mu A$
Output current (pin 14) at $V_{12-16} = 2\text{ V}$	$-I_{14}$	2,5	7,5	20	$\mu A$


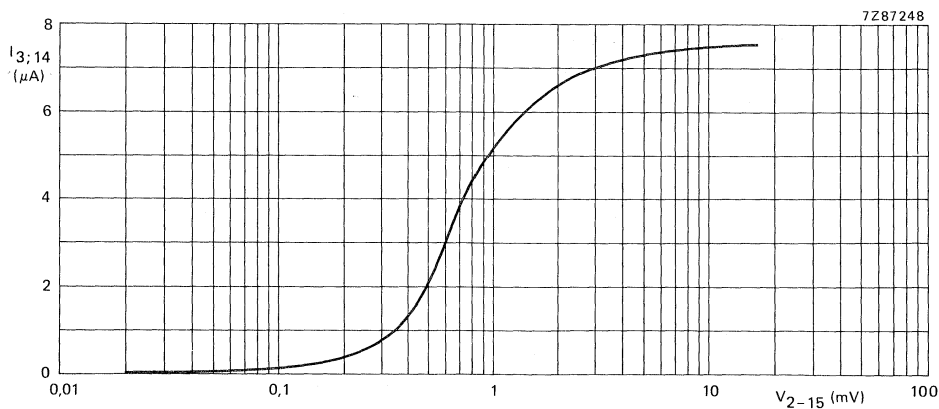


Fig. 2 Typical Q-factor killer current (pins 3 and 14) as a function of the peak-to-peak input voltage ( $V_{2-15}$ );  $I_{3, 14}$  is measured to ground,  $V_{2-15}(p-p)$  is a symmetrical square wave. Measured in Fig. 4;  $V_P = 5\text{ V}$ .

APPLICATION INFORMATION

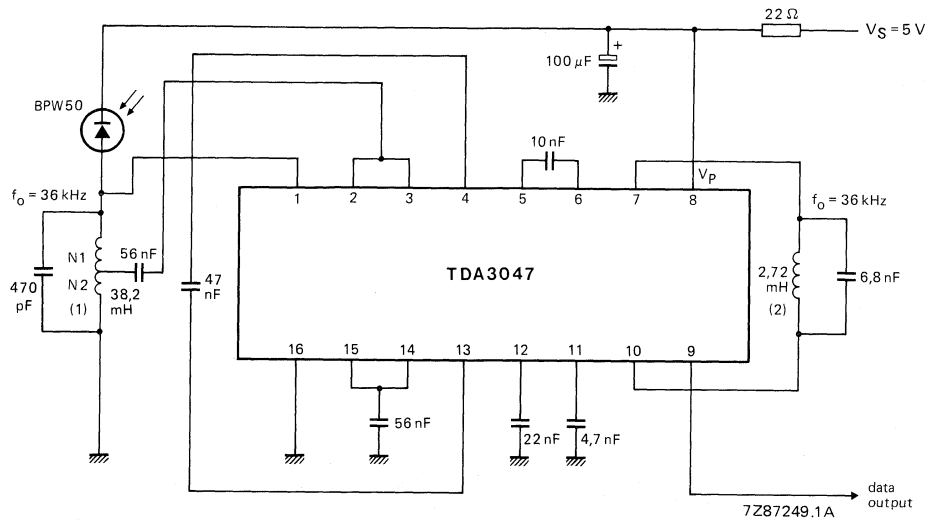

(1)  $N1 = 3,21$   
 $N2 = 1$   
 $Q = 16$

(2)  $Q = 6$

Fig. 3 Narrow-band receiver using TDA3047.

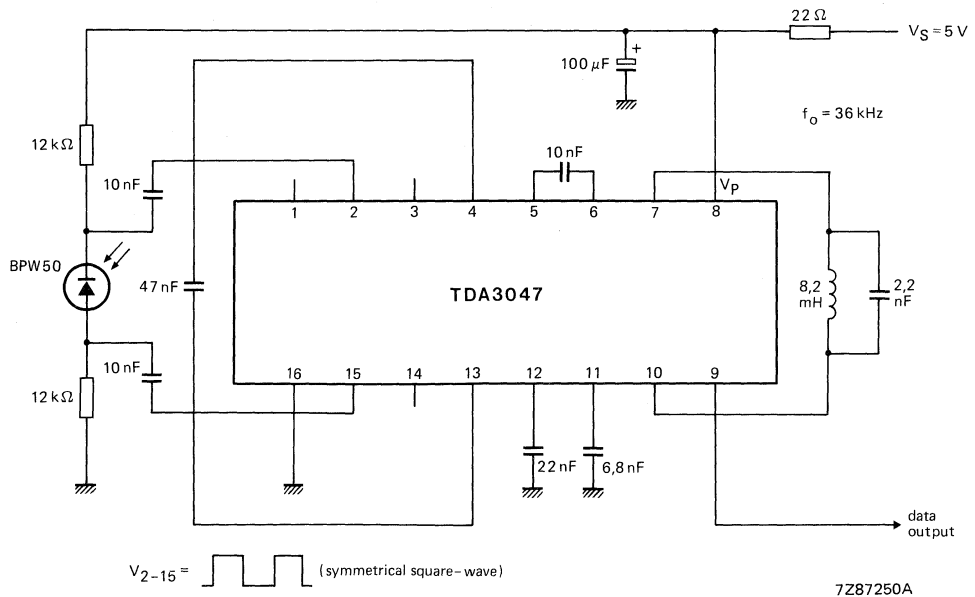


Fig. 4 Wide-band receiver with TDA3047.

For better sensitivity both 12 kΩ resistors may have a higher value.

## INFRARED RECEIVER

The TDA3048 is for infrared reception with low power consumption.  
The difference between the TDA3048 and TDA3047 is the polarity of the output signal.

### Features

- H.F. amplifier with a control range of 66 dB
- Synchronous demodulator and reference amplifier
- A.G.C. detector
- Pulse shaper
- Q-factor killing of the input selectivity, which is controlled by the a.g.c. circuit
- Input voltage limiter

### QUICK REFERENCE DATA

Supply voltage (pin 8)	$V_P = V_{8-16}$	typ.	5 V
Supply current (pin 8)	$I_P = I_8$	typ.	2,1 mA
Input signal (peak-to-peak value) (100% AM; $f = 36$ kHz)	$V_{2-15(p-p)}$		0,03 to 200 mV
Output signal (peak-to-peak value)	$V_{9-16(p-p)}$	typ.	4,5 V

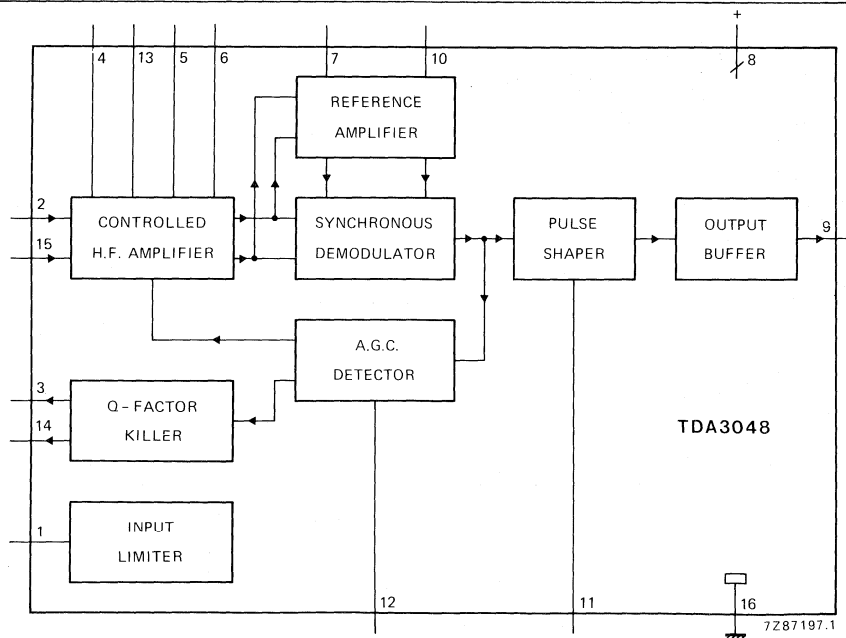


Fig. 1 Block diagram of TDA3048.

### PACKAGE OUTLINES

TDA3048P: 16-lead DIL; plastic (SOT-38).

TDA3048T: 16-lead mini-pack; plastic (SO-16L; SOT-162A).

## FUNCTIONAL DESCRIPTION

### General

The circuit operates from a 5 V supply and has a current consumption of 2 mA. The output is a current source which can drive or suppress a current of  $> 75 \mu\text{A}$  with a voltage swing of 4,5 V. The Q-killer circuit eliminates distortion of the output pulses due to the decay of the tuned input circuit at high input voltages. The input circuit is protected against signals of  $> 600 \text{ mV}$  by an input limiter. The typical input is an AM signal at a frequency of 36 kHz. Figures 3 and 4 show the circuit diagrams for the application of narrow-band and wide-band receivers respectively. Circuit description of the eight sections shown in Fig. 1 are given below.

### Controlled h.f. amplifier

The input signal is amplified by the gain-controlled amplifier. This circuit comprises three d.c. amplifier stages connected in cascade. The overall gain of the circuit is approximately 83 dB and the gain control range is in the order of 66 dB. Gain control is initially active in the second amplifier stage and is transferred to the first stage as limiting in the second stage occurs, thus maintaining optimum signal-to-noise ratio. Offset voltages in the d.c. coupled amplifier are minimized by two negative feedback loops; these also allow the circuit to have some series resistance of the decoupling capacitor. The output signal of the amplifier is applied to the reference amplifier and to the synchronous demodulator inputs.

### Reference amplifier

The reference amplifier amplifies and limits the input signal. The voltage gain is approximately 0 dB. The output signal of this amplifier is applied to the synchronous demodulator.

### Synchronous demodulator

In the synchronous demodulator the input signal and reference signal are multiplied. The demodulator output current is  $25 \mu\text{A}$  peak-to-peak. The output signal of the demodulator is fed to the input of the a.g.c. detector and to the input of the pulse-shaper circuit.

### A.G.C. detector

The a.g.c. detector comprises two n-p-n transistors operating as a differential pair. The top level of the output signal from the synchronous demodulator is detected by the a.g.c. circuit. Noise pulses are integrated by an internal capacitor. The output signal is amplified and applied to the first and second stages of the amplifier and to the Q-factor killer circuit.

### Pulse-shaper

The pulse-shaper comprises two n-p-n transistors operating as a differential pair connected in parallel with the a.g.c. differential pair. The slicing level of the pulse shaper is lower than the slicing level of the a.g.c. detector. The output of the pulse-shaper is determined by the voltage of the capacitor connected to pin 11, which is applied directly to the output buffer.

### Output buffer

The voltage of the pulse-shaper capacitor is fed to the base of the first transistor of a differential pair. To obtain a correct RC-5 code, a hysteresis circuit protects the output against spikes. The output at pin 9 is active *low*.

### Q-factor killer

Figure 3 shows the Q-factor killer in the narrow-band application. In this application it is necessary to decrease the Q-factor of the input selectivity particularly when large input signals occur at pins 2 and 15. In the narrow-band application the output of the Q-factor killer can be directly coupled to the input; pin 3 to pin 2 and pin 14 to pin 15.

**Input limiter**

In the narrow-band application high voltage peaks can occur on the input of the selectivity circuit. The input limiter limits these voltage peaks to approximately 0,7 V. Limiting is 0,9 V max. at  $I_1 = 3$  mA.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 8)	$V_P = V_{8-16}$	max.	13,2 V
Output current pulse shaper (pin 11)	$I_{11}$	max.	10 mA
Voltages between pins*			
pins 2 and 15	$V_{2-15}$	max.	4,5 V
pins 4 and 13	$V_{4-13}$	max.	4,5 V
pins 5 and 6	$V_{5-6}$	max.	4,5 V
pins 7 and 10	$V_{7-10}$	max.	4,5 V
pins 9 and 11	$V_{9-11}$	max.	4,5 V
Storage temperature range	$T_{stg}$		-65 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-25 to + 125 °C

\* All pins except pin 11 are short-circuit protected.

## CHARACTERISTICS

$V_P = V_{8-16} = 5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in Fig. 4; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 8)</b>					
Supply voltage	$V_P = V_{8-16}$	4,65	5,0	5,35	V
Supply current	$I_P = I_8$	1,2	2,1	3,0	mA
<b>Controlled h.f. amplifier (pins 2 and 15)</b>					
Minimum input signal (peak-to-peak value) at $f = 36 \text{ kHz}$ (note 1)	$V_{2-15(p-p)}$	—	15	25	$\mu\text{V}$
at $f = 36 \text{ kHz}$ (note 2)	$V_{2-15(p-p)}$	—	—	5	$\mu\text{V}$
A.G.C. control range (without Q-killing)		60	66	—	dB
Input signal for correct operation (peak-to-peak value; note 3)	$V_{2-15(p-p)}$	0,03	—	200	mV
Q-killing inactive ( $I_3 = I_{14} < 0,5 \mu\text{A}$ ) (peak-to-peak value)	$V_{2-15(p-p)}$	—	—	140	$\mu\text{V}$
Q-killing active ( $I_{14} = I_3 = \text{max.}$ ) (peak-to-peak value)	$V_{2-15(p-p)}$	28	—	—	mV
Q-killing range		see Fig. 2			
<b>Inputs</b>					
Input voltage (pin 2)	$V_{2-16}$	2,25	2,45	2,65	V
Input voltage (pin 15)	$V_{15-16}$	2,25	2,45	2,65	V
Input resistance (pin 2)	$R_{2-15}$	10	15	20	$\text{k}\Omega$
Input capacitance (pin 2)	$C_{2-15}$	—	3	—	pF
Input limiting (pin 1) at $I_1 = 3 \text{ mA}$	$V_{1-16}$	—	0,8	0,9	V
<b>Outputs</b>					
Output voltage <i>high</i> (pin 9) at $-I_9 = 75 \mu\text{A}$	$-V_{9-8}$	—	0,1	0,5	V
Output voltage <i>low</i> (pin 9) at $I_9 = 75 \mu\text{A}$	$V_{9-16}$	—	0,1	0,5	V
Output current; output voltage <i>low</i> $-V_{9-8} = 4,5 \text{ V}$	$I_9$	75	120	—	$\mu\text{A}$
$-V_{9-8} = 3,0 \text{ V}$	$I_9$	75	130	—	$\mu\text{A}$
$-V_{9-8} = 1,0 \text{ V}$	$I_9$	75	140	—	$\mu\text{A}$
Output current; output voltage <i>high</i> $-V_{9-8} = 0,5 \text{ V}$	$-I_9$	75	120	—	$\mu\text{A}$
Output resistance between pins 7 and 10	$R_{7-10}$	3,1	4,7	6,2	$\text{k}\Omega$

## Notes

1. Voltage pin 9 is *low*;  $I_9 = 75 \mu\text{A}$ .
2. Voltage pin 9 remains *high*.
3. Undistorted output pulse with 100% AM input.

parameter	symbol	min.	typ.	max.	unit
<b>Pulse shaper (pin 11)</b>					
Trigger level in positive direction (voltage pin 9 changes from <i>high</i> to <i>low</i> )	$V_{11-16}$	3,75	3,9	4,05	V
Trigger level in negative direction (voltage pin 9 changes from <i>low</i> to <i>high</i> )	$V_{11-16}$	3,4	3,55	3,7	V
Hysteresis of trigger levels	$\Delta V_{11-16}$	0,25	0,35	0,45	V
<b>A.G.C. detector (pin 12)</b>					
A.G.C. capacitor charge current	$-I_{12}$	3,4	5,0	6,6	$\mu A$
A.G.C. capacitor discharge current	$I_{12}$	67	100	133	$\mu A$
<b>Q-factor killer (pins 3 and 14)</b>					
Output current (pin 3) at $V_{12-16} = 2$ V	$-I_3$	2,5	7,5	20	$\mu A$
Output current (pin 14) at $V_{12-16} = 2$ V	$-I_{14}$	2,5	7,5	20	$\mu A$


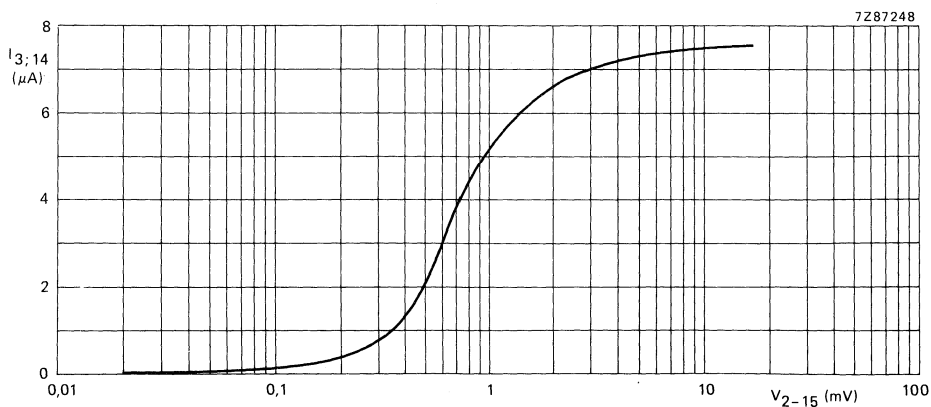


Fig. 2 Typical Q-factor killer current (pins 3 and 14) as a function of the peak-to-peak input voltage ( $V_{2-15}$ );  $I_{3, 14}$  is measured to ground,  $V_{2-15(p-p)}$  is a symmetrical square wave. Measured in Fig. 4;  $V_P = 5$  V.

APPLICATION INFORMATION

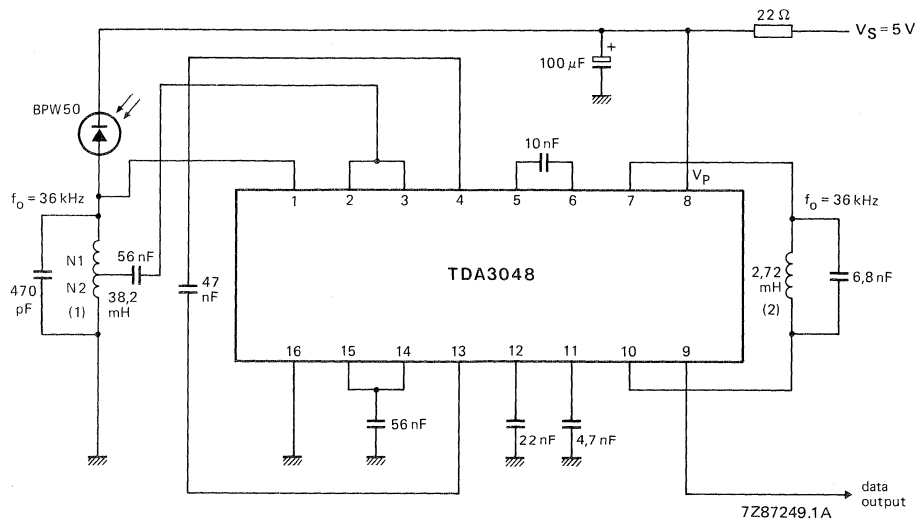

- (1) N1 = 3,21
- N2 = 1
- Q = 16

- (2) Q = 6

Fig. 3 Narrow-band receiver using TDA3048.

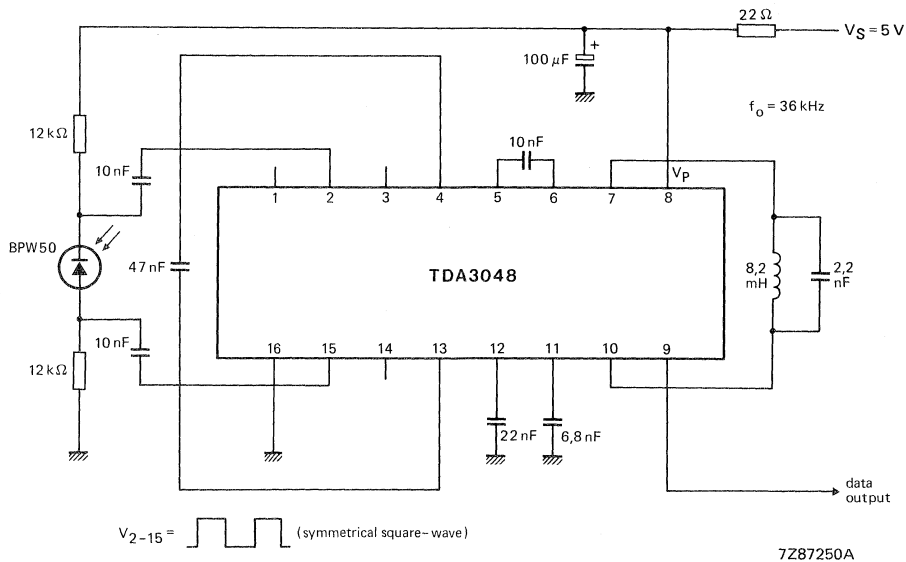


Fig. 4 Wide-band receiver with TDA3048.

For better sensitivity both 12 kΩ resistors may have a higher value.



## VIDEO CONTROL COMBINATION

The TDA3501 is a monolithic integrated circuit performing the control functions in a PAL/SECAM decoder which additionally comprises the integrated circuits TDA3510 (PAL decoder) and/or TDA3520 (SECAM decoder).

The required input signals are: luminance and colour difference  $-(R-Y)$  and  $-(B-Y)$ , while linear RGB signals can be inserted from an external source.

RGB signals are provided at the output to drive the video output stages.

The TDA3501 has the following features:

- capacitive coupling of the input signals
- linear saturation control
- (G-Y) and RGB matrix
- insertion possibility of linear RGB signals, e.g. video text, video games, picture-in-picture, camera or slide-scanner
- equal black level for inserted and matrixed signals by clamping
- 3 identical channels for the RGB signals
- linear contrast and brightness control, operating on both the inserted and matrixed RGB signals
- horizontal and vertical blanking (black and ultra-black respectively) and black-level clamping obtained via a 3-level sandcastle pulse
- differential amplifiers with feedback-inputs for stabilization of the RGB output stages
- 2 d.c. gain controls for the green and blue output signals (white point adjustment)
- beam current limiting possibility

### QUICK REFERENCE DATA

Supply voltage	$V_{6-24}$	typ.	12 V
Supply current	$I_6$	typ.	100 mA
Luminance input signal (peak-to-peak value)	$V_{15-24(p-p)}$	typ.	0,45 V
Luminance input resistance	$R_{15-24}$	typ.	12 k $\Omega$
Colour difference input signals (peak-to-peak values)			
$-(B-Y)$	$V_{18-24(p-p)}$	typ.	1,33 V
$-(R-Y)$	$V_{17-24(p-p)}$	typ.	1,05 V
Inserted RGB signals (peak-to-peak values)	$V_{12,13,14-24(p-p)}$	typ.	1 V
Three-level sandcastle pulse detector	$V_{10-24}$	typ.	2,5/4,5/8,0 V
Control voltage ranges			
brightness	$V_{20-24}$		1 to 3 V
contrast	$V_{19-24}$		2 to 4 V
saturation	$V_{16-24}$		2,1 to 4 V

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

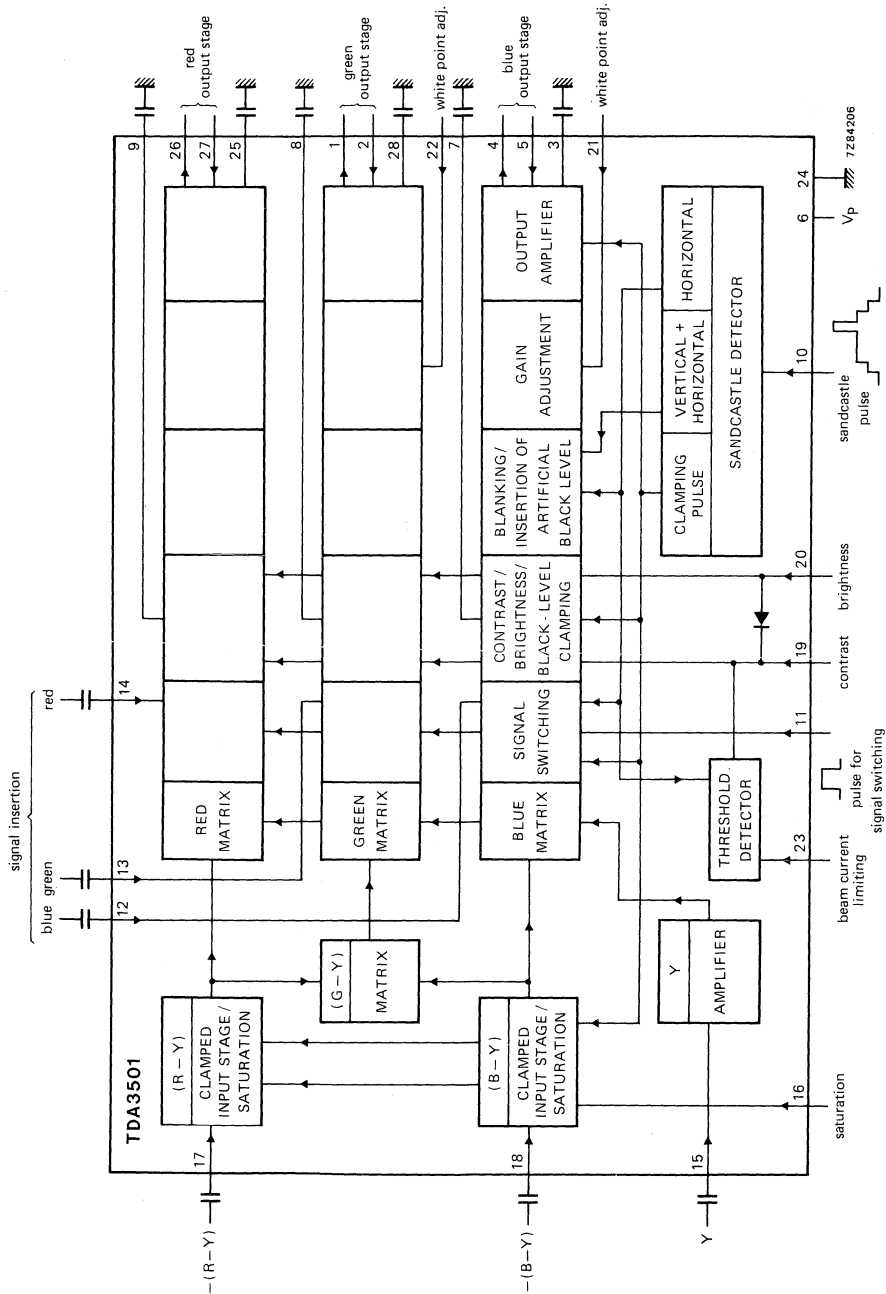


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

		min.	max.	
Supply voltage	$V_P = V_{6-24}$	—	13,2	V
Voltages with respect to pin 24				
pins 1,4,26	$V_{1,4,26-24}$	$\frac{1}{2}V_P$	$V_P + 1$	V
pins 2,5,27	$V_{2,5,27-24}$	0	$V_P$	V
pin 10	$V_{10-24}$	0	$V_P$	V
pin 11	$V_{11-24}$	-0,5	3	V
pins 16,19,20	$V_{16,19,20-24}$	0	$\frac{1}{2}V_P$	V
pins 21,22	$V_{21,22-24}$	0	$V_P$	V
pin 23	$V_{23-24}$	0	$V_P$	V
pins 3,25,28; 7,8,9; 12,13,14; 15,17,18	no external d.c. voltage			
Current at pin 20	$I_{20}$	max.	5	mA
Total power dissipation	$P_{tot}$	max.	1,7	W
Storage temperature	$T_{stg}$		-25 to + 125	°C
Operating ambient temperature	$T_{amb}$		0 to + 70	°C

**CHARACTERISTICS**Supply voltage range  $V_P$  10,8 to 13,2 VThe following characteristics are measured in Fig. 2;  $V_P = 12$  V;  $T_{amb} = 25$  °C; $V_{18-24(p-p)} = 1,33$  V;  $V_{17-24(p-p)} = 1,05$  V;  $V_{15-24(p-p)} = 0,45$  V;  $V_{12,13,14-24(p-p)} = 1$  V; unless otherwise specifiedCurrent consumption  $I_6$  typ. 100 mA**Colour difference inputs**

-(B-Y) input signal (peak-to-peak value)*	$V_{18-24(p-p)}$		1,33	V
-(R-Y) input signal (peak-to-peak value)*	$V_{17-24(p-p)}$		1,05	V
Internal resistance of colour difference sources		<	200	$\Omega$
Input resistance	$R_{17,18-24}$	>	100	k $\Omega$
Internal d.c. voltage due to clamping	$V_{17,18-24}$	typ.	4,2	V
Saturation control				
control voltage range for a change of saturation from -20 dB to + 6 dB	$V_{16-24}$		2,1 to 4	V
control voltage for attenuation > 40 dB	$V_{16-24}$	<	1,8	V
nominal saturation (6 dB below max.)	$V_{16-24}$	typ.	3	V
input current	$I_{16}$	<	20	$\mu$ A

\* For saturated colour bar with 75% of maximum amplitude.

## CHARACTERISTICS (continued)

## (G-Y) matrix

Matrixed according the equation

$$V_{(G-Y)} = -0,51 V_{(R-Y)} - 0,19 V_{(B-Y)}$$

## Luminance amplifier

Input signal (peak-to-peak)	$V_{15-24(p-p)}$		0,45 V
Input resistance	$R_{15-24}$	typ.	12 k $\Omega$
Internal d.c. voltage	$V_{15-24}$	typ.	2,7 V

## RGB channels

Signal switching input voltage for insertion on level	$V_{11-24}$		0,9 to 1,5 V
off level	$V_{11-24}$		-0,5 to +0,3 V
Input current	$I_{11}$		-100 to +200 $\mu$ A
Signal insertion external RGB input signal (peak-to-peak value)*	$V_{12,13,14-24(p-p)}$		1 V
internal d.c. voltage due to clamping	$V_{12,13,14-24}$	typ.	3,5 V
input current	$I_{12,13,14}$	<	5 $\mu$ A
Contrast control control voltage range for a change of contrast from -17 dB to +3 dB	$V_{19-24}$		2 to 4 V
nominal contrast (3 dB below max.)	$V_{19-24}$	typ.	3,4 V
control voltage for -6 dB	$V_{19-24}$	typ.	2,7 V
input current at $V_{23-24} \geq 6$ V	$I_{19}$	<	2,5 $\mu$ A
Beam current limiting internal d.c. voltage	$V_{23-24}$	typ.	6 V
input resistance	$R_{23-24}$	typ.	10 k $\Omega$
input current contrast control $V_{23-24} = 5,8$ V	$I_{19}$	typ.	0,7 mA
$V_{23-24} = 5,7$ V	$I_{19}$	typ.	10 mA
$V_{23-24} = 5,6$ V	$I_{19}$	typ.	16 mA
Brightness control control voltage range	$V_{20-24}$		1 to 3 V
nominal brightness voltage	$V_{20-24}$		2 V
input current	$I_{20}$	<	10 $\mu$ A
control voltage for nominal black level which equals the inserted artificial black level	$V_{20-24}$	typ.	2 V
change of black level in the control range related to the nominal luminance signal (black-white)		typ.	$\pm 50$ %

\* During the clamping time (see sandcastle detector Fig. 1), the inserted RGB signals are clamped to the same black level as the internal RGB signals. For proper clamping, the internal resistance of the external signal sources should be  $< 200 \Omega$ .

## Internal signal limiting\*

signal limiting for nominal luminance  
(black to white = 100%)

black	typ.	-25 %
white	typ.	125 %

## White point adjustment

A.C. voltage gain \*\*

at $V_{21,22-24} = 6 \text{ V}$		100 %
at $V_{21,22-24} = 0 \text{ V}$	<	60 %
at $V_{21,22-24} = 12 \text{ V}$	>	140 %

Input resistance	$R_{21,22-24}$	typ.	20 k $\Omega$
------------------	----------------	------	---------------

## Differential output amplifier

Feedback inputs (pins 2,5,27)

d.c. voltage during clamping	$V_{2,5,27-24}$		5,79 to 5,95 V
voltage difference between the feedback inputs	$\Delta V$	<	80 mV
input resistance	$R_{2,5,27-24}$	>	100 k $\Omega$

Output amplifiers (pins 1,4,26)  
transconductance

$$\frac{\Delta I_1}{\Delta V_{2-24}} = \frac{\Delta I_4}{\Delta V_{5-24}} = \frac{\Delta I_{26}}{\Delta V_{27-24}}$$

typ.	20 mA/V
------	---------

integrated load resistance	$R_{1,4,26-24}$	typ.	610 $\Omega$
----------------------------	-----------------	------	--------------

output current (peak value) at $V_{1,4,26-24} = 8,2 \text{ V}$	$\pm I_{1,4,26 \text{ m}}$	typ.	5 mA
---	----------------------------	------	------

## Gain data

At nominal contrast, saturation and  
white point adjustment

Voltage gain between Y-input (pin 15) and feedback inputs (pins 2,5,27)	$G_{2,5,27-15}$	typ.	10 dB
--	-----------------	------	-------

Frequency response (0 to 5 MHz)	$d_{2,5,27-15}$	<	3 dB
---------------------------------	-----------------	---	------

Voltage gain between colour difference inputs (pins 17 and 18) and feedback inputs (pin 5 and 27)	$G_{5-18} = G_{27-17}$	typ.	0 dB
---	------------------------	------	------

Frequency response (0 to 2 MHz)	$d_{5-18} = d_{27-17}$	<	3 dB
---------------------------------	------------------------	---	------

Voltage gain between signal display inputs (pins 12,13,14) and feedback inputs (pins 2,5,27)	$G_{2-13} = G_{5-12} = G_{27-14}$	typ.	0 dB
--	-----------------------------------	------	------

Frequency response (0 to 5 MHz)	$d_{2-13} = d_{5-12} = d_{27-14}$	<	3 dB
---------------------------------	-----------------------------------	---	------

\* Brightness, contrast and saturation control in nominal position.

\*\* With input pins 21 and 22 not connected an internal bias voltage of 6 V is supplied.

## CHARACTERISTICS (continued)

## Sandcastle detector

There are 3 internal thresholds (proportional to  $V_p$ )  
the following amplitudes are required for  
separating the various pulses:

horizontal and vertical blanking pulses (note 1)	$V_{10-24}$	>	2 V
		<	3 V
horizontal pulse (note 2)	$V_{10-24}$	>	4 V
		<	5 V
clamping pulse (note 3)	$V_{10-24}$	>	7,5 V
d.c. voltage for artificial black level (note 4) (scan and flyback)	$V_{10-24}$	>	7,5 V
no keying	$V_{10-24}$	<	1 V
Input current	-I <sub>10</sub>	<	100 $\mu$ A

## Notes

1. Blanking to ultra-black (-20%).
2. Insertion of artificial black level.
3. Pulse duration  $> 3,5 \mu$ s.
4. This function will also be obtained by leaving pin 10 open.

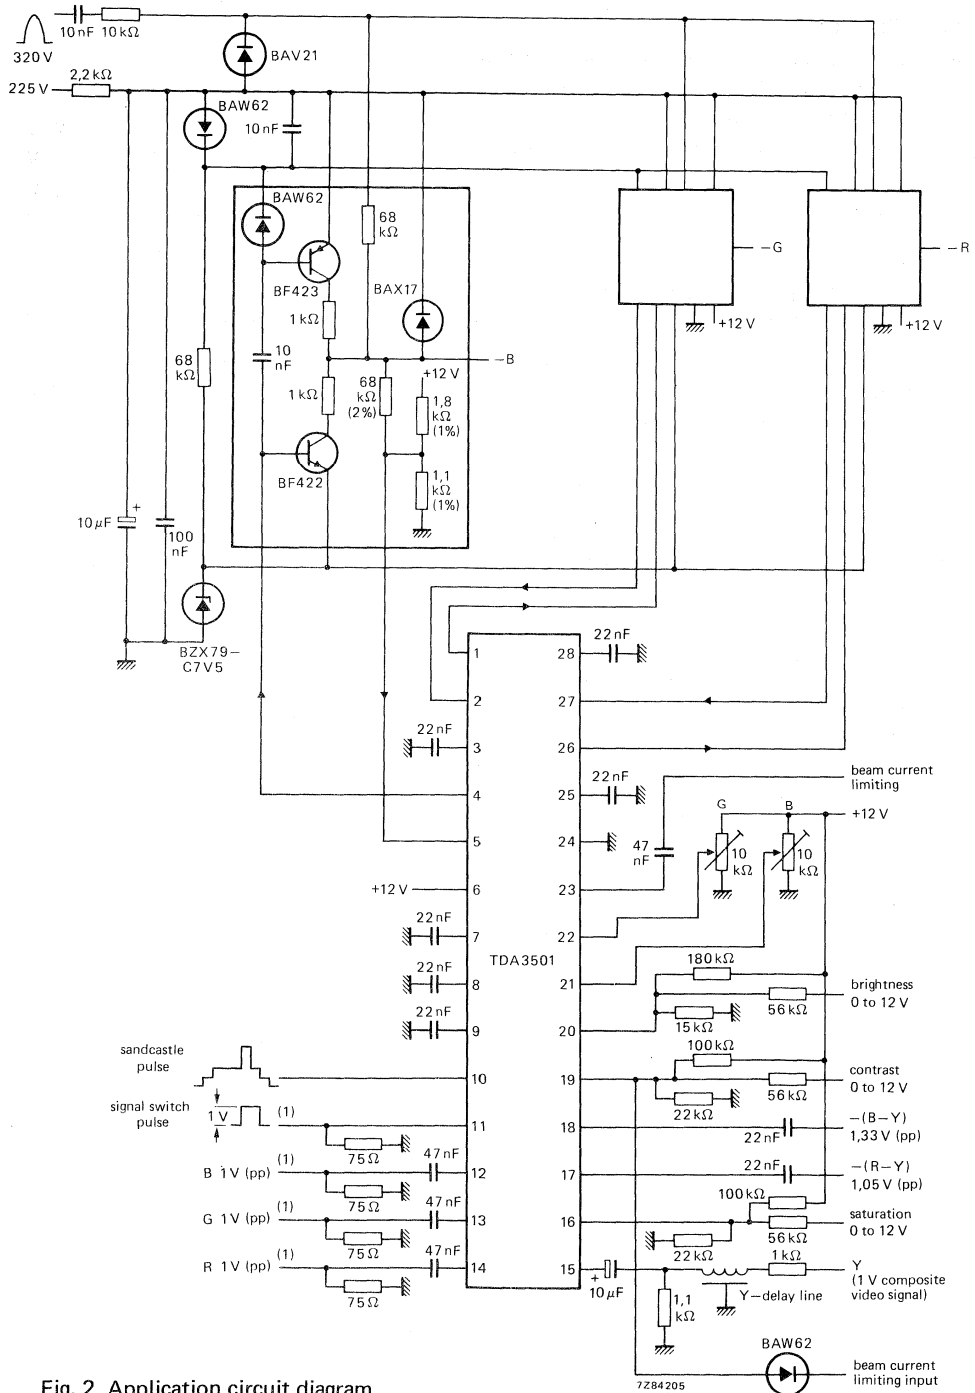


Fig. 2 Application circuit diagram.





## VIDEO CONTROL COMBINATION CIRCUIT WITH AUTOMATIC CUT-OFF CONTROL

### GENERAL DESCRIPTION

The TDA3505 and TDA3506 are monolithic integrated circuits which perform video control functions in a PAL/SECAM decoder. The TDA3505 is for negative colour difference signals  $-(R-Y)$ ,  $-(B-Y)$  and the TDA3506 is for positive colour difference signals  $+(R-Y)$ ,  $+(B-Y)$ .

The required input signals are: luminance and colour difference (negative or positive) and a 3-level sandcastle pulse for control purposes. Linear RGB signals can be inserted from an external source. RGB output signals are available for driving the video output stages. The circuits provide automatic cut-off control of the picture tube.

### Features


- Capacitive coupling of the colour difference and luminance input signals with black level clamping in the input stages
- Linear saturation control acting on the colour difference signals
- (G-Y) and RGB matrix
- Linear transmission of inserted signals
- Equal black levels for inserted and matrixed signals
- 3 identical channels for the RGB signals
- Linear contrast and brightness controls, operating on both the inserted and matrixed RGB signals
- Peak beam current limiting input
- Clamping, horizontal and vertical blanking of the three input signals controlled by a 3-level sandcastle pulse
- 3 DC gain controls for the RGB output signals (white point adjustment)
- Emitter-follower outputs for driving the RGB output stages
- Input for automatic cut-off control with compensation for leakage current of the picture tube

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage (pin 6)		$V_p = V_{6-24}$	—	12	—	V
Supply current		$I_p = I_6$	—	95	—	mA
Composite video input signal (peak-to-peak value)		$V_{15-24(p-p)}$	—	0,45	—	V
Colour difference input signals (peak-to-peak value)						
$-(B-Y)$ or $+(B-Y)$ respectively		$V_{18-24(p-p)}$	—	1,33	—	V
$-(R-Y)$ or $+(R-Y)$ respectively		$V_{17-24(p-p)}$	—	1,05	—	V
Inserted RGB signals (black-to-white value)		$V_{12, 13, 14-24}$	—	1,0	—	V
Three-level sandcastle pulse		$V_{10-24}$	—	2,5	—	V
			—	4,5	—	V
			—	8,0	—	V
Control voltage ranges						
brightness		$V_{20-24}$	1,0	—	3,0	V
contrast		$V_{19-24}$	2,0	—	4,3	V
saturation		$V_{16-24}$	2,0	—	4,3	V

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

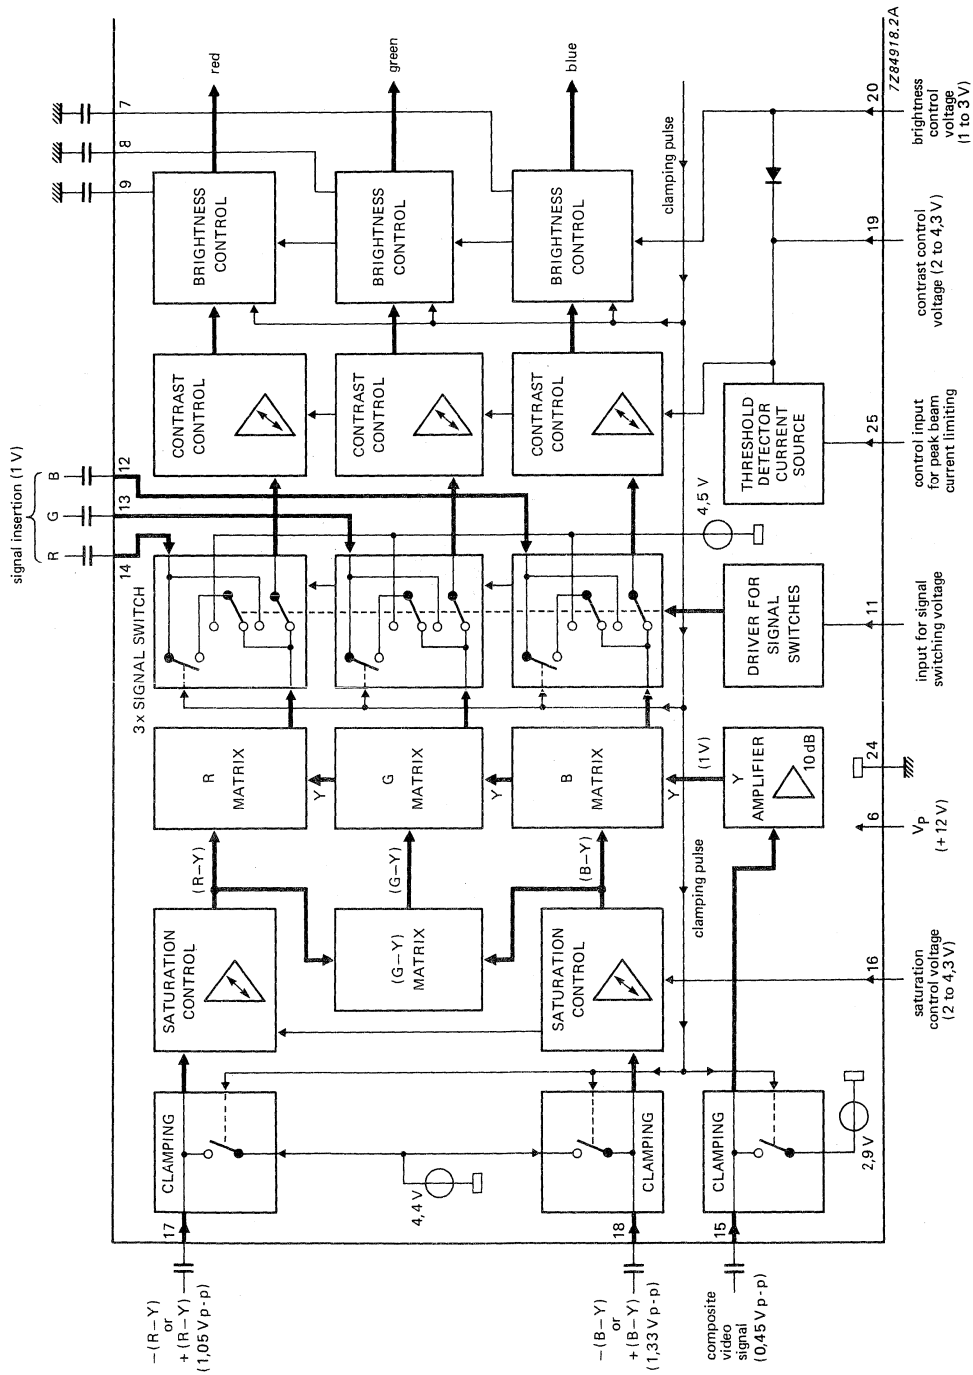

Note Colour difference inputs are negative for TDA3505 or positive for TDA3506. Fig. 1a Part of block diagram; continued in Fig. 1b.

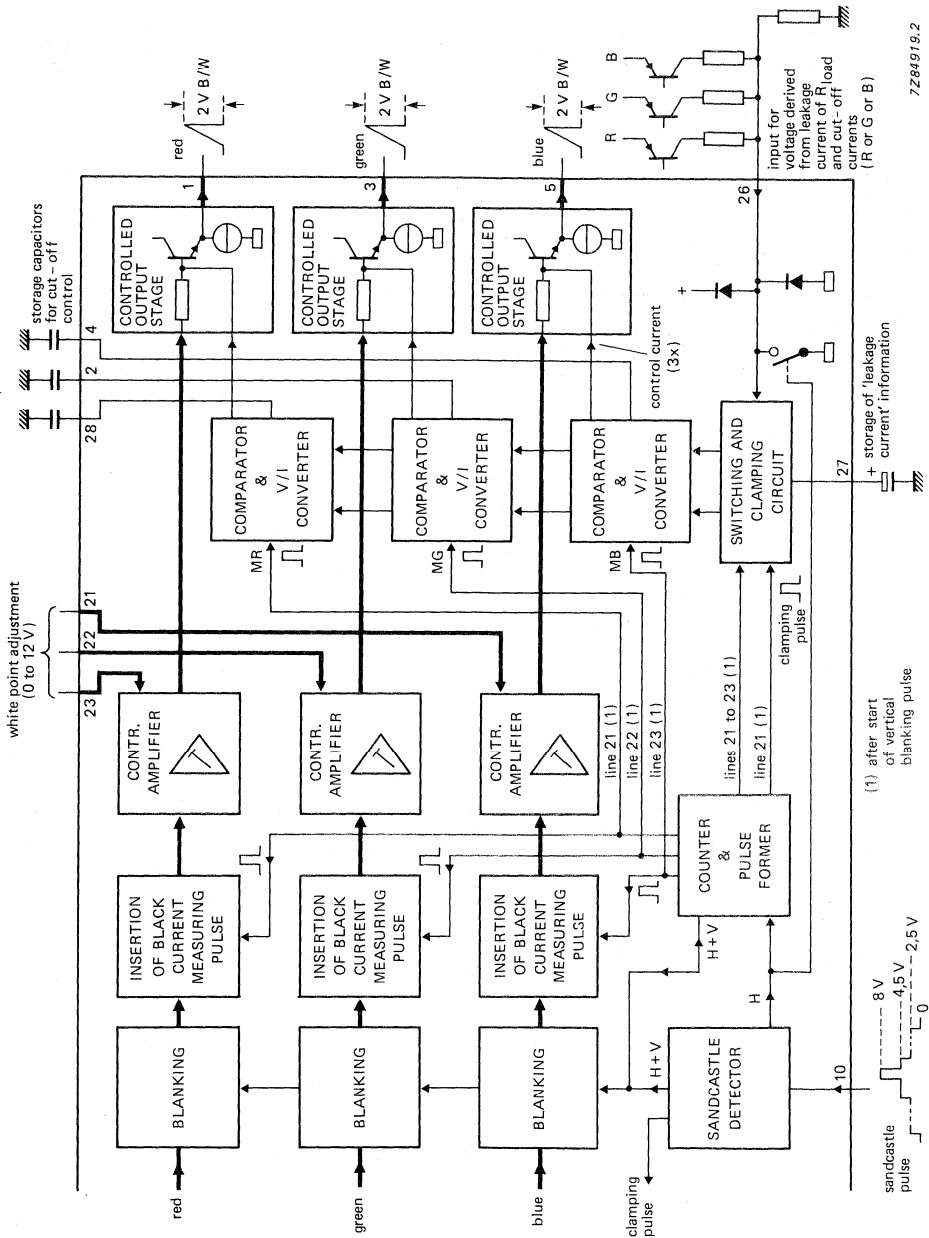


Fig. 1b Part of block diagram; continued from Fig. 1a.

### PINNING

pin	description
1	red output
2	green storage capacitor for cut-off control
3	green output
4	blue storage capacitor for cut-off control
5	blue output
6	positive supply voltage (+12 V)
7	blue storage for brightness
8	green storage for brightness
9	red storage for brightness
10	sandcastle pulse input
11	fast switch for RGB inputs
12	blue input (external signal)
13	green input (external signal)
14	red input (external signal)
15	luminance input
16	saturation control input
17	colour difference input $-(R-Y)$ or $+(R-Y)$ respectively
18	colour difference input $-(B-Y)$ or $+(B-Y)$ respectively
19	contrast control input
20	brightness control input
21	white point adjustment, blue
22	white point adjustment, green
23	white point adjustment, red
24	ground (0 V)
25	control input for peak beam current limiting
26	automatic cut-off control input
27	storage capacitor for leakage current
28	red storage capacitor for cut-off control

### RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC134)

parameter	symbol	min.	max.	unit
Supply voltage (pin 6)	$V_P = V_{6-24}$	—	13,2	V
Voltage ranges				
at pins 10, 21, 22, 23, 25, 26	$V_{n-24}$	0	$V_P$	V
at pin 11	$V_{11-24}$	-0,5	3,0	V
at pins 16, 19, 20	$V_{16, 19, 20-24}$	0	0,5 $V_P$	V
at pins 1, 2, 3, 4, 5, 7, 8, 9, 12, 13, 14, 15, 17, 18, 27, 28	no external DC voltage			
Currents				
at pins 1, 3, 5	$-I_{1, 3, 5}$	—	3	mA
at pin 19	$I_{19}$	—	10	mA
at pin 20	$I_{20}$	—	5	mA
at pin 25	$-I_{25}$	—	5	mA
Total power dissipation	$P_{tot}$	—	1,7	W
Storage temperature range	$T_{stg}$	-25	+150	°C
Operating ambient temperature range	$T_{amb}$	0	+70	°C

## CHARACTERISTICS

$V_P = V_{6-24} = 12,0 \text{ V}$ ;  $V_{12, 13, 14(p-p)} = 1,0 \text{ V}$ ;  $V_{15-24(p-p)} = 0,45 \text{ V}$ ;  $V_{17-24(p-p)} = 1,05 \text{ V}$ ;  
 $V_{18-24(p-p)} = 1,33 \text{ V}$ ;  $T_{amb} = 25 \text{ }^\circ\text{C}$ ; measured in Fig. 2; nominal settings of brightness, contrast,  
 saturation and white point adjustment; all voltages are referred to pin 24; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply (pin 6)</b>						
Supply voltage		$V_P = V_6$	10,8	12,0	13,2	V
Supply current		$I_P$	—	95	125*	mA
<b>Colour difference inputs (pins 17, 18)</b>						
(R-Y) input signal (pin 17) (peak-to-peak value)	for saturated colour bar with 75% of maximum amplitude	$V_{17(p-p)}$	—	1,05	1,48	V
(B-Y) input signal (pin 18) (peak-to-peak value)	for saturated colour bar with 75% of maximum amplitude	$V_{18(p-p)}$	—	1,33	1,88	V
Input current during scanning		$I_{17, 18}$	—	—	1,0	$\mu\text{A}$
Input resistance		$R_{17, 18-24}$	1,0	—	—	$\text{M}\Omega$
Internal DC voltage due to clamping	note 1	$V_{17, 18}$	3,8	4,4	4,8	V
<b>Saturation control (pin 16)</b>						
Control voltage for maximum saturation	note 1	$V_{16}$	4,0	4,2	4,4	V
Control voltage for nominal saturation	6 dB below max. note 1	$V_{16}$	2,9	3,1	3,3	V
Control voltage for -26 dB saturation referred to maximum	note 1	$V_{16}$	1,9	2,1	2,3	V
Minimum saturation	$V_{16} = 1,8 \text{ V}$	d	46	50	—	dB
Input current		$I_{16}$	—	—	20	$\mu\text{A}$
<b>(G-Y) matrix</b>						
Matrixed according to the equation $V_{(G-Y)} = -0,51 V_{(R-Y)} - 0,19 V_{(B-Y)}$						
<b>Luminance input (pin 15)</b>						
Composite video input signal (peak-to-peak value)		$V_{15(p-p)}$	—	450	630	mV
Input resistance		$R_{15-24}$	100	—	—	$\text{k}\Omega$

\* < 110 mA after warm-up.

CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Luminance input</b> (continued)						
Input capacitance		C <sub>15-24</sub>	—	—	5	pF
Input current during scanning		I <sub>15</sub>	—	—	1	μA
Linearity	nominal settings	m	0,85	—	—	
Internal DC voltage due to clamping	note 1	V <sub>15</sub>	2,5	2,9	3,3	V
<b>RGB channels</b>						
<i>Signal switching input (pin 11)</i>						
Normal state; no insertion		V <sub>11</sub>	0	—	0,4	V
Level for insertion-on		V <sub>11</sub>	0,9	—	3,0	V
Input capacitance		C <sub>11-24</sub>	—	—	10	pF
Input current	V <sub>11</sub> = 0 to 3 V	I <sub>11</sub>	−100	—	+450	μA
<i>Signal insertion (pins 12, 13, 14)</i>						
External RGB input signals (black-to-white value)		V <sub>12, 13, 14</sub>	—	1,0	1,4	V
Input current during scanning		I <sub>12, 13, 14</sub>	—	—	1,0	μA
Internal DC voltage due to clamping	notes 1, 2	V <sub>12, 13, 14</sub>	4,0	4,5	5,0	V
<b>Contrast control</b> (pin 19)						
Control voltage for maximum contrast	note 1	V <sub>19</sub>	4,0	4,2	4,4	V
Control voltage for nominal contrast	3 dB below max.	V <sub>19</sub>	3,4	3,6	3,8	V
Control voltage for −10 dB below max.		V <sub>19</sub>	2,6	2,8	3,0	V
Minimum contrast referred to max.	V <sub>19</sub> = 2 V	d	18	21	29	dB
Input current	V <sub>25</sub> > 6 V	I <sub>19</sub>	—	—	2	μA
Difference between RGB channels	contrast −10 dB below max.		—	—	0,6	dB
<b>Peak beam current limiting</b> (pin 25)						
Internal DC bias voltage	note 1	V <sub>25</sub>	5,3	5,5	5,7	V
Input resistance		R <sub>25-24</sub>	—	10	—	kΩ
Input current at contrast control input	V <sub>25</sub> = 4,5 V	I <sub>19</sub>	10	20	34	mA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Brightness control</b> (pin 20)	note 1					
Control voltage range		V <sub>20</sub>	1	—	3	V
Input current		-I <sub>20</sub>	—	—	10	μA
Change of black level in the control range related to the luminance signal (black/white)	ΔV <sub>20</sub> = 1 V		—	±50	—	%
Tracking			95	—	—	%
<b>Internal signal limiting (RGB)</b>						
Signal limiting referred to nominal luminance and nominal black level						
black			—	-25	—	%
white			115	120	125	%
<b>White point adjustment</b> (pins 21, 22, 23)	note 1					
AC voltage gain	note 3					
V <sub>21, 22, 23</sub> = 5,5 V		G <sub>V</sub>	—	100	—	%
V <sub>21, 22, 23</sub> = 0 V		G <sub>V</sub>	-35	-40	—	%
V <sub>21, 22, 23</sub> = 12 V		G <sub>V</sub>	+35	+40	—	%
Input resistance		R <sub>21,22,23-24</sub>	—	20	—	kΩ
<b>RGB outputs</b> (emitter follower) (pins 1, 3, 5)						
Output voltage; black-to-white positive		V <sub>1, 3, 5</sub>	1,5	2,0	2,5	V
Black level without automatic cut-off control	note 1; V <sub>28,2,4</sub> = 10 V	V <sub>1, 3, 5</sub>	6,1	6,9	7,7	V
Difference in black level between RGB channels due to variation of contrast control		ΔV <sub>1, 3, 5</sub>	—	—	10	mV
Cut-off control range	note 1	V <sub>1, 3, 5</sub>	4,0	4,6	—	V
Internal current source		I <sub>1, 3, 5</sub>	2,0	3,0	—	mA

**CHARACTERISTICS** (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Automatic cut-off control</b> (pin 26)	notes 1, 4					
Input voltage range		V <sub>26</sub>	0	—	6,5	V
Voltage difference between cut-off current measurement (note 5) and leakage current measurement (note 6)		V <sub>26</sub>	0,5	0,64	0,72	V
<i>Input pin 26 switches to ground during horizontal flyback</i>						
<b>Gain data</b>	at nominal brightness, contrast, saturation and white point settings					
Voltage gain with respect to luminance input (pin 15)		G <sub>1,3,5-15</sub>	14	16	18	dB
Frequency response of luminance path	0 to 5 MHz	d <sub>1,3,5-15</sub>	—	—	3	dB
Voltage gain with respect to colour difference inputs (pins 17 and 18)		G <sub>5-18</sub> G <sub>1-17</sub>	3	6	9	dB
Frequency response of colour difference paths	0 to 2 MHz	d <sub>5-18</sub> d <sub>1-17</sub>	—	—	3	dB
Voltage gain with respect to inserted signals		G <sub>1-14</sub> G <sub>3-13</sub> G <sub>5-12</sub>	4	6	8	dB
Frequency response of inserted signal paths	0 to 10 MHz	d <sub>1-14</sub> d <sub>3-13</sub> d <sub>5-12</sub>	—	—	3	dB
Rise and fall times of RGB output signals (pins 1, 3, 5)		t <sub>r</sub> , t <sub>f</sub>	—	40	—	ns
Difference in transit times between R, G and B channels		Δt <sub>1, 3, 5</sub>	—	0	15	ns
Delay time between signal switching and signal insertion		t <sub>d</sub>	—25	—	+25	ns
Difference in gain between normal mode and signal insertion mode		ΔG <sub>1,3,5</sub>	—	—	10	%



parameter	conditions	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse detector</b> (pin 10)	note 7					
Levels for separating the following pulses:						
horizontal and vertical blanking pulses	note 8	V <sub>10</sub>	1,0	1,5	2,0	V
required pulses (H+V)		V <sub>10</sub>	2,1	2,5	2,9	V
horizontal pulses		V <sub>10</sub>	3,0	3,5	4,0	V
required pulses (H)		V <sub>10</sub>	4,1	4,5	5,0	V
clamping pulses	note 9	V <sub>10</sub>	6,5	7,0	7,5	V
required pulses		V <sub>10</sub>	7,6	—	12,0	V
no keying		V <sub>10</sub>	—	—	1,0	V
Input current		-I <sub>10</sub>	—	—	110	μA

**Notes to the characteristics**

- Values are proportional to the supply voltage.
- When  $V_{11-24} < 0,4$  V during clamping time - the black levels of the inserted RGB signals are clamped on the black levels of the internal RGB signals.  
When  $V_{11-24} > 0,9$  V during clamping time - the black levels of the inserted RGB signals are clamped on an internal DC voltage (correct clamping of the external RGB signals is possible only when they are synchronous with the sandcastle pulse).
- When pins 21, 22 and 23 are not connected, an internal bias voltage of 5,5 V is supplied.
- Automatic cut-off control measurement occurs in the following lines after start of the vertical blanking pulse:  
line 20: measurement of leakage current (R + G + B)  
line 21: measurement of red cut-off current  
line 22: measurement of green cut-off current  
line 23: measurement of blue cut-off current
- Black level of the measured channel is nominal; the other two channels are blanked to ultra-black.
- All three channels blanked to ultra-black.  
The cut-off control cycle occurs when the vertical blanking part of the sandcastle pulse contains more than 3 line pulses.  
The internal blanking continues until the end of the last measured line.  
The vertical blanking pulse is not allowed to contain more than 34 line pulses, otherwise another control cycle begins.
- The sandcastle pulse is compared with three internal thresholds (proportional to  $V_p$ ) and the given levels separate the various pulses.
- Blanked to ultra-black (-25%).
- Pulse duration  $\geq 3,5$  μs.

# TDA3505 TDA3506

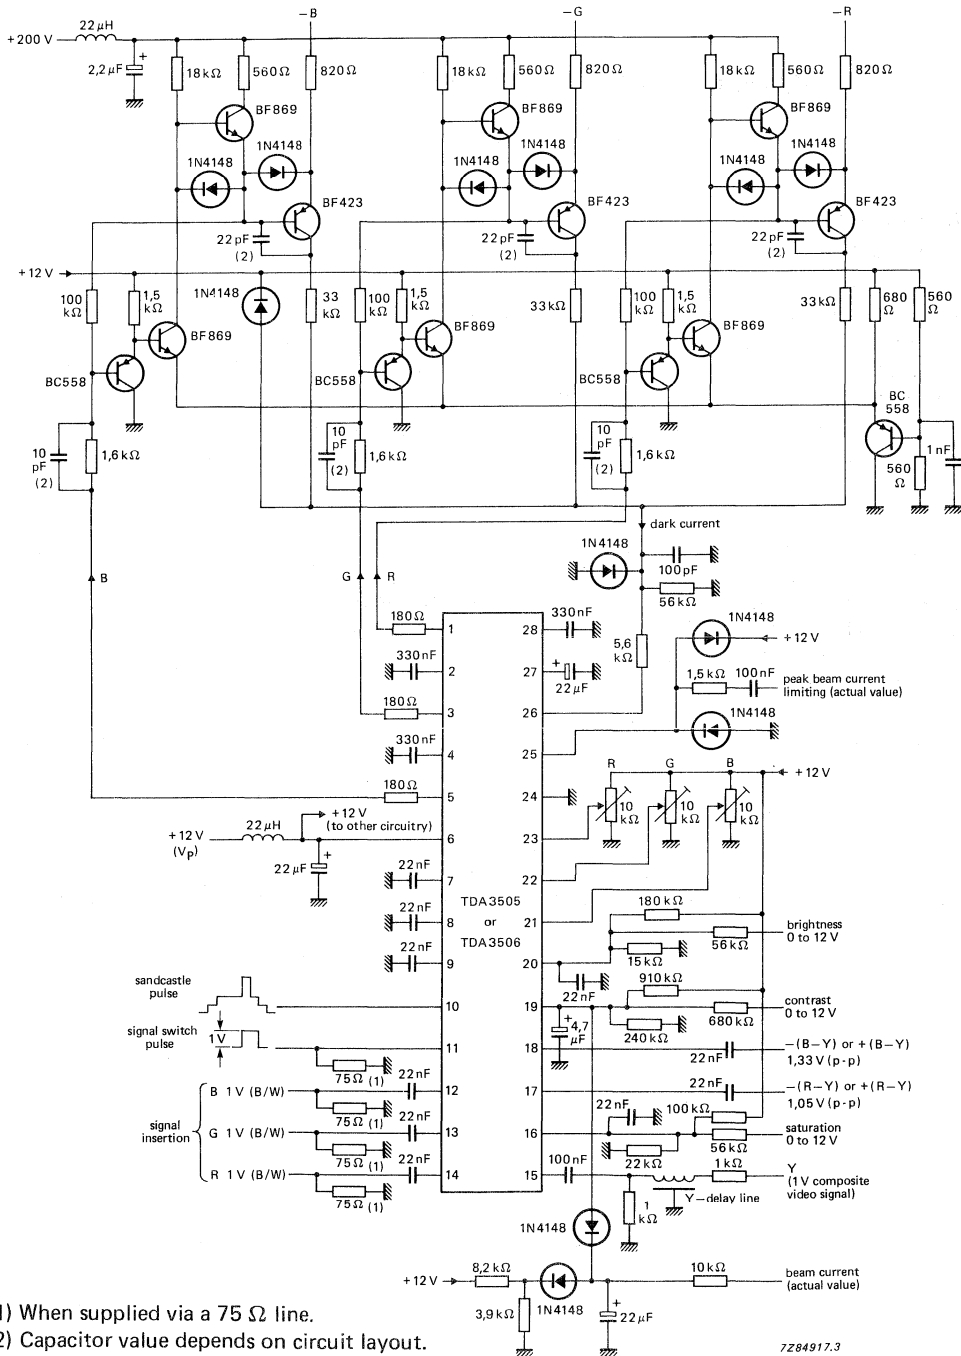


Fig. 2 Typical application circuit diagram using TDA3505 or TDA3506; colour difference inputs are negative for TDA3505 or positive for TDA3506.

## VIDEO CONTROL COMBINATION CIRCUIT WITH AUTOMATIC CUT-OFF CONTROL

### GENERAL DESCRIPTION

The TDA3507 is a monolithic integrated circuit which performs video control functions in a PAL/SECAM decoder.

The required input signals are: luminance and negative colour difference  $-(R-Y)$  and  $-(B-Y)$ , and a 3-level sandcastle pulse for control purposes. Linear RGB signals can be inserted from an external source. RGB output signals are available for driving the video output stages. This circuit provides automatic cut-off control of the picture tube.

The TDA3507 is the same as the TDA3505 but with RGB channel bandwidths of (typical) 16 MHz and an automatic cut-off cycle that ends in line 15.

### Features

- Capacitive coupling of the colour difference and luminance input signals with black level clamping in the input stages
- Linear saturation control acting on the colour difference signals
- $(G-Y)$  and RGB matrix
- Linear transmission of inserted signals
- Equal black levels for inserted and matrixed signals
- 3 identical channels for the RGB signals
- Linear contrast and brightness controls, operating on both the inserted and matrixed RGB signals
- Peak beam current limiting input
- Clamping, horizontal and vertical blanking of the three input signals controlled by a 3-level sandcastle pulse
- 3 DC gain controls for the RGB output signals (white point adjustment)
- Emitter-follower outputs for driving the RGB output stages
- Input for automatic cut-off control with compensation for leakage current of the picture tube

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

## QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage (pin 6)		$V_P = V_{6-24}$	—	12	—	V
Supply current		$I_P = I_6$	—	100	—	mA
Composite video input signal (peak-to-peak value)		$V_{15-24(p-p)}$	—	0,45	—	V
Colour difference input signals (peak-to-peak value)						
—(B—Y)		$V_{18-24(p-p)}$	—	1,33	—	V
—(R—Y)		$V_{17-24(p-p)}$	—	1,05	—	V
Inserted RGB signals (black-to-white value)		$V_{12,13,14-24}$	—	1,0	—	V
Three-level sandcastle pulse		$V_{10-24}$	—	2,5	—	V
			—	4,5	—	V
			—	8,0	—	V
Control voltage ranges						
brightness		$V_{20-24}$	1,0	—	3,0	V
contrast		$V_{19-24}$	2,0	—	4,3	V
saturation		$V_{16-24}$	2,0	—	4,3	V

DEVELOPMENT DATA

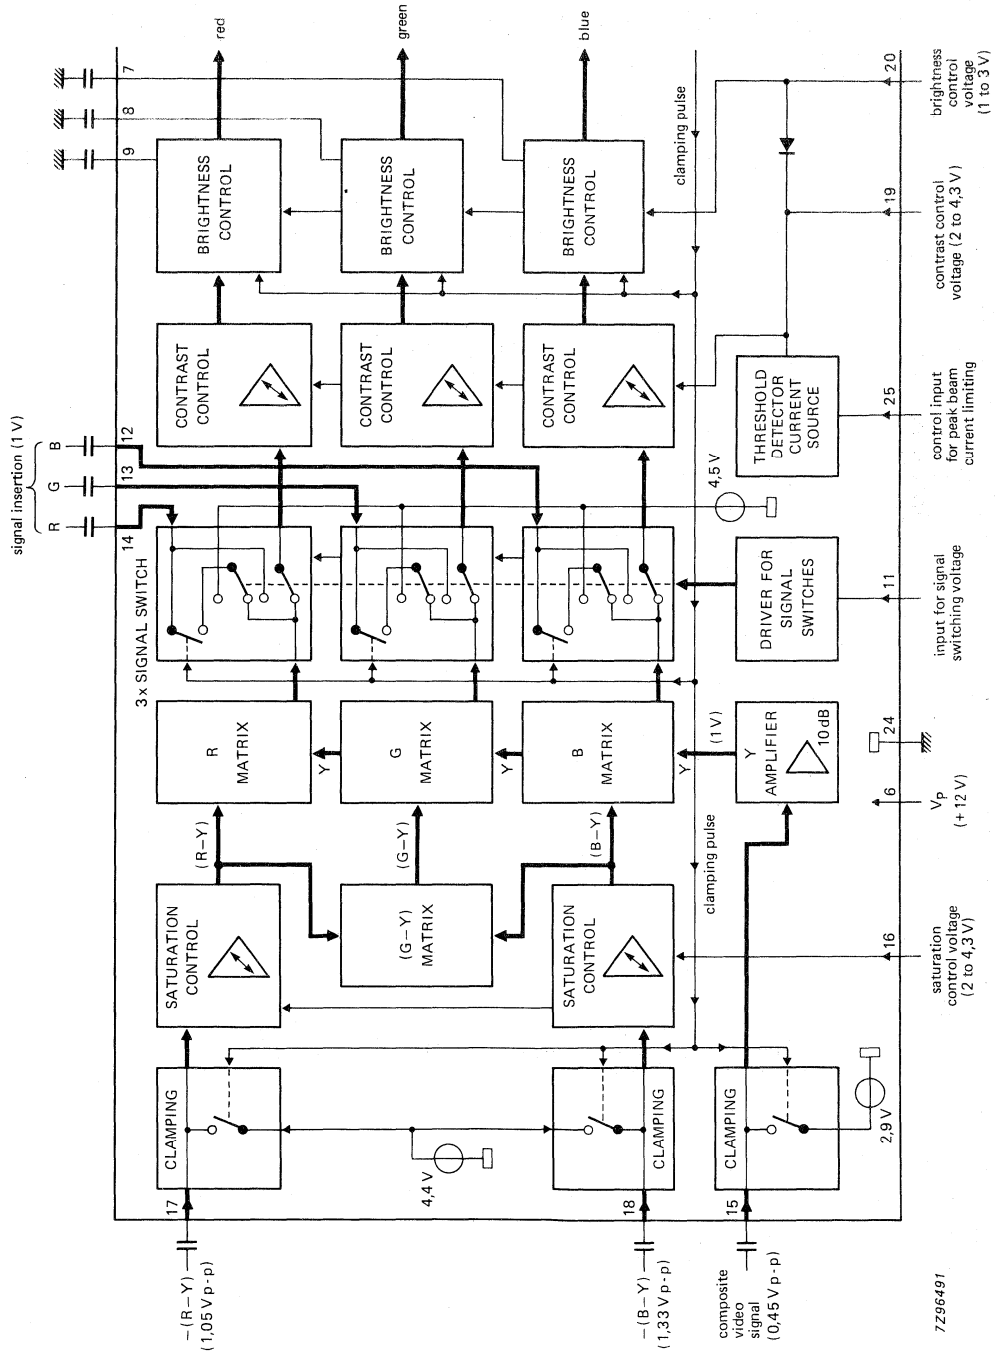


Fig. 1a Part of block diagram, continued in Fig. 1b.

7Z96491

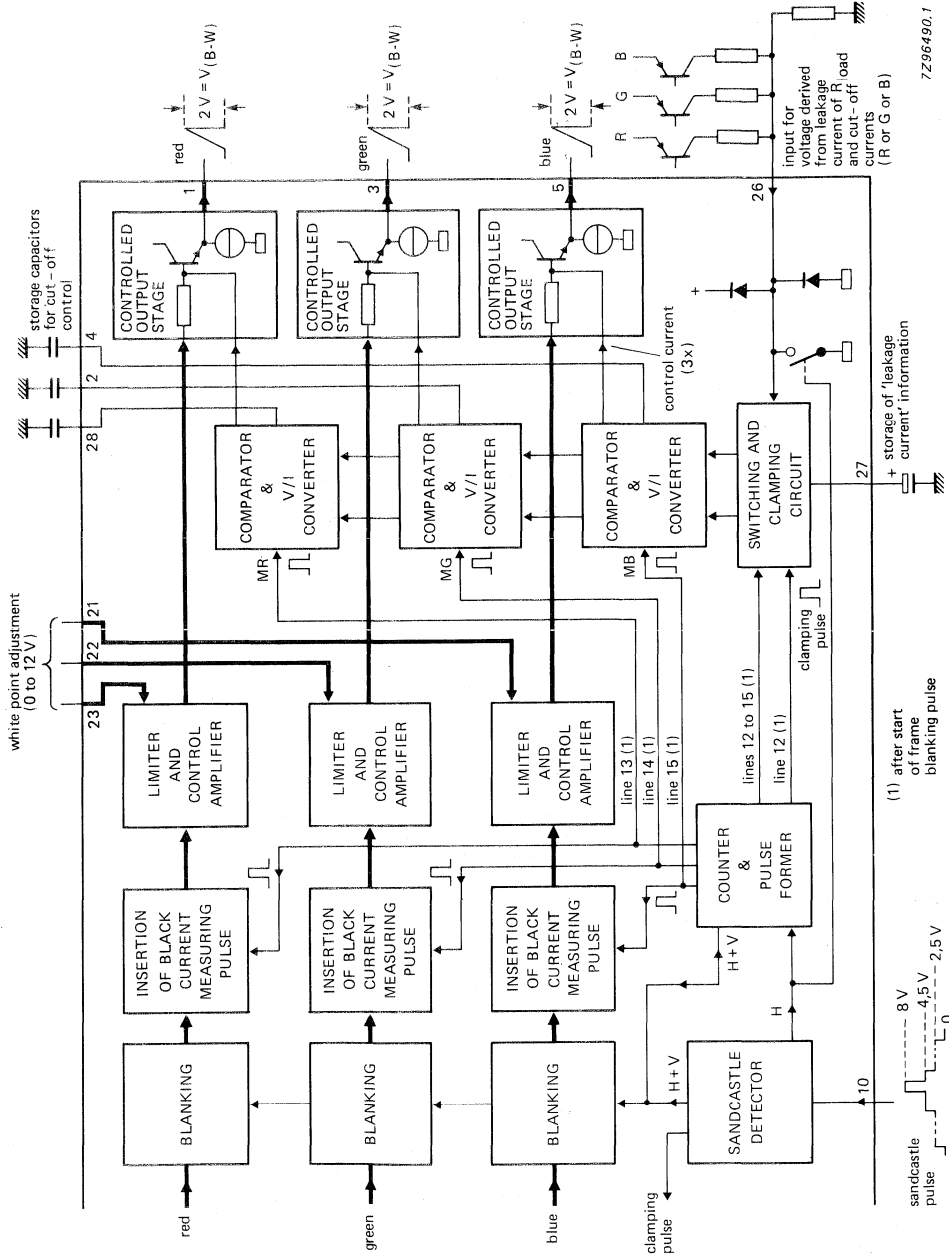


Fig. 1b Part of block diagram, continued from Fig. 1a.

## PINNING

pin	description
1	red output
2	green storage capacitor for cut-off control
3	green output
4	blue storage capacitor for cut-off control
5	blue output
6	positive supply voltage (+12 V)
7	blue storage for brightness
8	green storage for brightness
9	red storage for brightness
10	sandcastle pulse input
11	fast switch for RGB inputs
12	blue input (external signal)
13	green input (external signal)
14	red input (external signal)
15	luminance input
16	saturation control input
17	-(R-Y) colour difference input
18	-(B-Y) colour difference input
19	contrast control input
20	brightness control input
21	white point adjustment, blue
22	white point adjustment, green
23	white point adjustment, red
24	ground (0 V)
25	control input for peak beam current limiting
26	automatic cut-off control input
27	storage capacitor for leakage current
28	red storage capacitor for cut-off control

DEVELOPMENT DATA

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage (pin 6)	$V_P = V_{6-24}$	—	13,2	V
Voltage ranges				
at pins 10, 21, 22, 23, 25, 26	$V_{n-24}$	0	$V_P$	V
at pin 11	$V_{11-24}$	-0,5	3,0	V
at pins 16, 19, 20	$V_{16,19,20-24}$	0	$0,5V_P$	V
at pins 1, 2, 3, 4, 5, 7, 8, 9, 12, 13, 14, 15, 17, 18, 27, 28				
			no external DC voltage	
Currents				
at pins 1, 3, 5	$-I_{1,3,5}$	—	3	mA
at pin 19	$I_{19}$	—	10	mA
at pin 20	$I_{20}$	—	5	mA
at pin 25	$-I_{25}$	—	5	mA
Total power dissipation	$P_{tot}$	—	1,7	W
Storage temperature range	$T_{stg}$	-25	+150	°C
Operating ambient temperature range	$T_{amb}$	0	+70	°C

## CHARACTERISTICS

$V_P = V_{6-24} = 12,0 \text{ V}$ ;  $V_{12,13,14(p-p)} = 1,0 \text{ V}$ ;  $V_{15-24(p-p)} = 0,45 \text{ V}$ ;  $V_{17-24(p-p)} = 1,05 \text{ V}$ ;  
 $V_{18-24(p-p)} = 1,33 \text{ V}$ ;  $T_{amb} = 25 \text{ }^\circ\text{C}$ ; measured in Fig. 2; nominal settings of brightness, contrast,  
 saturation and white point adjustment; all voltages are referred to pin 24; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply (pin 6)</b>						
Supply voltage		$V_P = V_6$	10,8	12,0	13,2	V
Supply current		$I_P$	—	100	130*	mA
<b>Colour difference inputs (pins 17, 18)</b>						
—(R—Y) input signal (pin 17) (peak-to-peak value)	for saturated colour bar with 75% of maximum amplitude	$V_{17(p-p)}$	—	1,05	1,48	V
—(B—Y) input signal (pin 18) (peak-to-peak value)	for saturated colour bar with 75% of maximum amplitude	$V_{18(p-p)}$	—	1,33	1,88	V
Input current during scanning		$I_{17,18}$	—	—	1,0	$\mu\text{A}$
Input resistance		$R_{17,18-24}$	1,0	—	—	$\text{M}\Omega$
Internal DC voltage due to clamping	note 1	$V_{17,18}$	3,8	4,4	4,8	V
<b>Saturation control (pin 16)</b>						
Control voltage for maximum saturation	note 1	$V_{16}$	4,0	4,2	4,4	V
Control voltage for nominal saturation	6 dB below max. note 1	$V_{16}$	2,9	3,1	3,3	V
Control voltage for —26 dB saturation referred to maximum	note 1	$V_{16}$	1,9	2,1	2,3	V
Minimum saturation	$V_{16} = 1,8 \text{ V}$	d	46	50	—	dB
Input current		$I_{16}$	—	—	20	$\mu\text{A}$
<b>(G—Y) matrix</b>						
Matrixed according to the equation $V_{(G-Y)} = -0,51 V_{(R-Y)} - 0,19 V_{(B-Y)}$						
<b>Luminance input (pin 15)</b>						
Composite video input signal (peak-to-peak value)		$V_{15(p-p)}$	—	450	630	mV
Input resistance		$R_{15-24}$	100	—	—	$\text{k}\Omega$
Input capacitance		$C_{15-24}$	—	—	5	pF

\* &lt; 115 mA after warm-up



## DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Luminance input (continued)</b>						
Input current during scanning		$I_{15}$	—	—	1	$\mu\text{A}$
Linearity	nominal settings	m	0,85	—	—	
Internal DC voltage due to clamping	note 1	$V_{15}$	2,5	2,9	3,3	V
<b>RGB channels</b>						
<i>Signal switching input (pin 11)</i>						
Normal state; no insertion		$V_{11}$	0	—	0,4	V
Level for insertion-on		$V_{11}$	0,9	—	3,0	V
Input capacitance		$C_{11-24}$	—	—	10	pF
Input current	$V_{11} = 0 \text{ to } 3 \text{ V}$	$I_{11}$	-100	—	+450	$\mu\text{A}$
<i>Signal insertion (pins 12, 13, 14)</i>						
External RGB input signals (black-to-white value)		$V_{12,13,14}$	—	1,0	1,4	V
Input current during scanning		$I_{12,13,14}$	—	—	1,0	$\mu\text{A}$
Internal DC voltage due to clamping	notes 1, 2	$V_{12,13,14}$	4,0	4,5	5,0	V
<b>Contrast control (pin 19)</b>						
Control voltage for maximum contrast	note 1	$V_{19}$	4,0	4,2	4,4	V
Control voltage for nominal contrast	3 dB below max.	$V_{19}$	3,4	3,6	3,8	V
Control voltage for -10 dB below max.		$V_{19}$	2,6	2,8	3,0	V
Minimum contrast referred to max.	$V_{19} = 2 \text{ V}$	d	18	21	29	dB
Input current	$V_{25} > 6 \text{ V}$	$I_{19}$	—	—	2	$\mu\text{A}$
Difference between RGB channels	contrast -10 dB below max.		—	—	0,6	dB
<b>Peak beam current limiting (pin 25)</b>						
Internal DC bias voltage	note 1	$V_{25}$	5,3	5,5	5,7	V
Input resistance		$R_{25-24}$	—	10	—	k $\Omega$
Input current at contrast control input	$V_{25} = 4,5 \text{ V}$	$I_{19}$	10	20	34	mA

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Brightness control (pin 20)</b>	note 1					
Control voltage range		$V_{20}$	1	—	3	V
Input current		$-I_{20}$	—	—	10	$\mu\text{A}$
Change of black level in the control range related to the luminance signal (black/white)	$\Delta V_{20} = 1 \text{ V}$		—	$\pm 50$	—	%
Tracking			95	—	—	%
<b>Internal signal limiting (RGB)</b>						
Signal limiting referred to nominal luminance and nominal black level						
black			—	-25	—	%
white			115	120	125	%
<b>White point adjustment (pins 21, 22, 23)</b>	note 1					
AC voltage gain	note 3					
$V_{21,22,23} = 5,5 \text{ V}$		$G_V$	—	100	—	%
$V_{21,22,23} = 0 \text{ V}$		$G_V$	-35	-40	—	%
$V_{21,22,23} = 12 \text{ V}$		$G_V$	+35	+40	—	%
Input resistance		$R_{21,22,23-24}$	—	20	—	$\text{k}\Omega$
<b>RGB outputs (emitter follower) (pins 1, 3, 5)</b>						
Output voltage; black-to-white positive		$V_{1,3,5}$	1,5	2,0	2,5	V
Black level without automatic cut-off control	note 1; $V_{28,2,4} = 10 \text{ V}$	$V_{1,3,5}$	6,1	6,9	7,7	V
Difference in black level between RGB channels due to variation of contrast control		$\Delta V_{1,3,5}$	—	—	10	mV
Cut-off control range	note 1	$V_{1,3,5}$	4,0	4,6	—	V
Internal current source		$I_{1,3,5}$	2,0	3,0	—	mA

## DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Automatic cut-off control</b> (pin 26)	notes 1,4					
Input voltage range		V <sub>26</sub>	0	—	6,5	V
Voltage difference between cut-off current measurement (note 5) and leakage current measurement (note 6)		V <sub>26</sub>	0,5	0,64	0,72	V
<i>Input pin 26 switches to ground during horizontal flyback</i>						
<b>Gain data</b>	at nominal brightness, contrast, saturation and white point settings					
Voltage gain with respect to luminance input (pin 15)		G <sub>1,3,5-15</sub>	14	16	18	dB
Frequency response of luminance path	0 to 5 MHz	d <sub>1,3,5-15</sub>	—	—	3	dB
Voltage gain with respect to colour difference inputs (pins 17 and 18)		G <sub>5-18</sub> G <sub>1-17</sub>	3	6	9	dB
Frequency response of colour difference paths	0 to 2 MHz	d <sub>5-18</sub> d <sub>1-17</sub>	—	—	3	dB
Voltage gain with respect to inserted signals		G <sub>1-14</sub> G <sub>3-13</sub> G <sub>5-12</sub>	4	6	8	dB
Frequency response of inserted signal paths	0 to 16 MHz	d <sub>1-14</sub> d <sub>3-13</sub> d <sub>5-12</sub>	—	3	—	dB
Frequency response of inserted signal paths	0 to 13 MHz	d <sub>1-14</sub> d <sub>3-13</sub> d <sub>5-12</sub>	—	—	3	dB
Rise and fall times of RGB output signals (pins 1, 3, 5)		t <sub>r</sub> ,t <sub>f</sub>	—	40	—	ns
Difference in transit times between R, G and B channels		Δt <sub>1,3,5</sub>	—	0	15	ns

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Gain data (continued)</b>						
Delay time between signal switching and signal insertion		$t_d$	-25	—	+25	ns
Difference in gain between normal mode and signal insertion mode		$\Delta G_{1,3,5}$	—	—	10	%
<b>Sandcastle pulse detector (pin 10)</b>	note 7					
Levels for separating the following pulses:						
horizontal and vertical blanking pulses	note 8	$V_{10}$	1,0	1,5	2,0	V
required pulses (H+V)		$V_{10}$	2,1	2,5	2,9	V
horizontal pulses		$V_{10}$	3,0	3,5	4,0	V
required pulses (H)		$V_{10}$	4,1	4,5	5,0	V
clamping pulses	note 9	$V_{10}$	6,5	7,0	7,5	V
required pulses		$V_{10}$	7,6	—	12,0	V
no keying		$V_{10}$	—	—	1,0	V
Input current		$-i_{10}$	—	—	110	$\mu A$

## Notes to the characteristics

- Values are proportional to the supply voltage.
- When  $V_{11-24} < 0,4$  V during clamping time — the black levels of the inserted RGB signals are clamped on the black levels of the internal RGB signals.  
When  $V_{11-24} > 0,9$  V during clamping time — the black levels of the inserted RGB signals are clamped on an internal DC voltage (correct clamping of the external RGB signals is possible only when they are synchronous with the sandcastle pulse).
- When pins 21, 22 and 23 are not connected, an internal bias voltage of 5,5 V is supplied.
- Automatic cut-off control measurement occurs in the following lines after start of the vertical blanking pulse:
  - line 12: measurement of leakage current (R + G + B)
  - line 13: measurement of red cut-off current
  - line 14: measurement of green cut-off current
  - line 15: measurement of blue cut-off current
- Black level of the measured channel is nominal; the other two channels are blanked to ultra-black.
- All three channels blanked to ultra-black.  
The cut-off control cycle occurs when the vertical blanking part of the sandcastle pulse contains more than 3 line pulses.  
The internal blanking continues until the end of the last measured line.  
The vertical blanking pulse is not allowed to contain more than 34 line pulses, otherwise another control cycle begins.

**Notes to the characteristics (continued)**

7. The sandcastle pulse is compared with three internal thresholds (proportional to  $V_p$ ) and the given levels separate the various pulses.
8. Blanked to ultra-black ( $-25\%$ ).
9. Pulse duration  $\geq 3,5 \mu s$ .

DEVELOPMENT DATA

APPLICATION INFORMATION

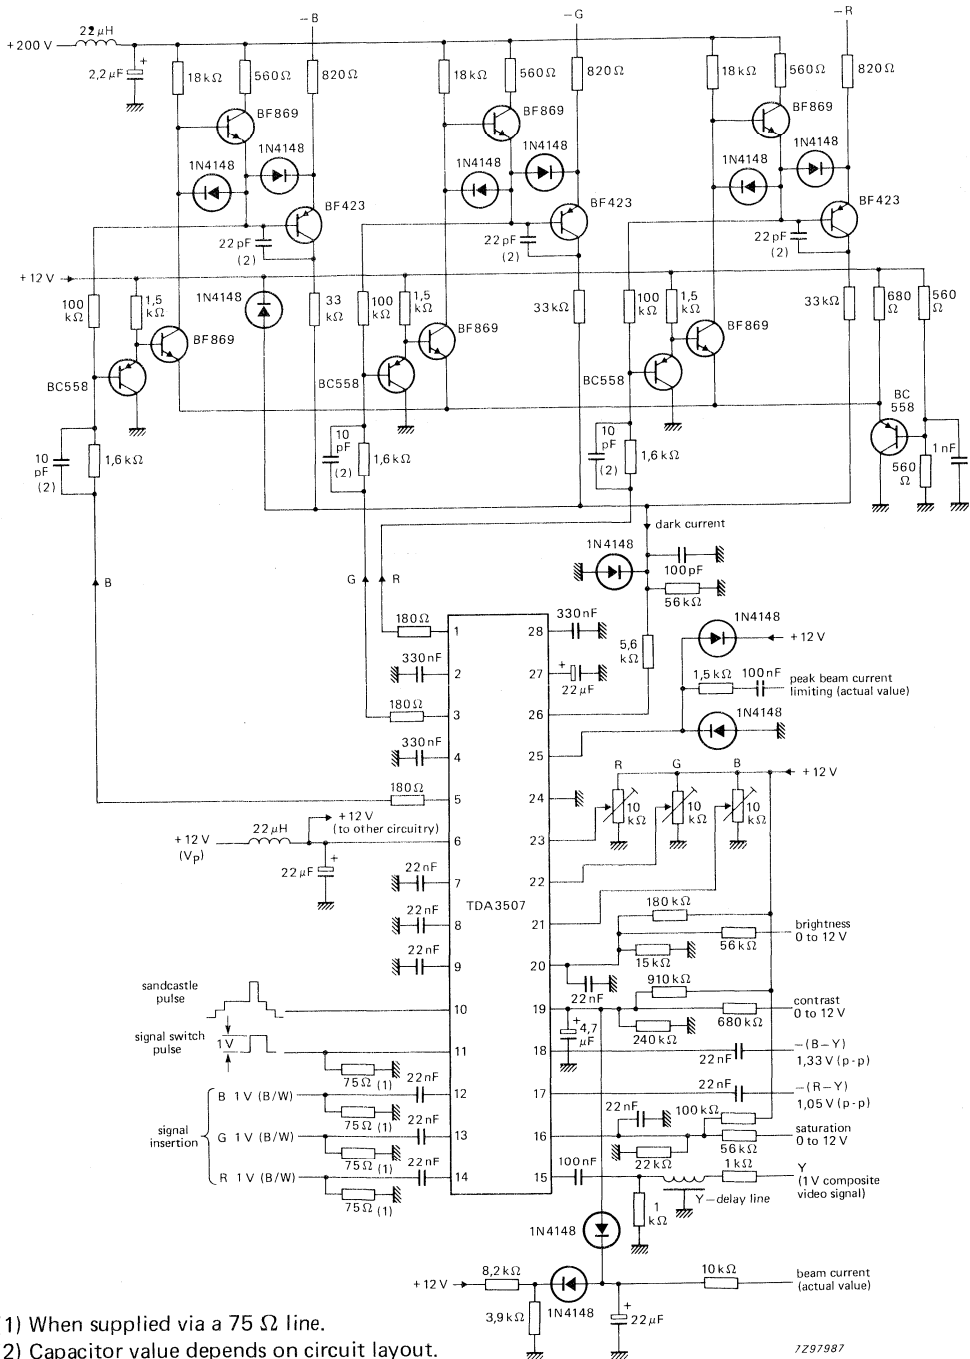


Fig. 2 Typical application circuit diagram using the TDA3507.

## PAL DECODER

The TDA3510 is a monolithic integrated colour decoder for the PAL standard.  
The circuit incorporates the following functions:

### Chrominance part

- Controlled chrominance amplifier
- Chrominance output stage with automatic standard switch for driving the 64  $\mu$ s delay line
- Blanking circuit for the colour burst signal

### Reference voltage and control voltage part

- 8,8 MHz reference oscillator with divider stage to obtain both the 4,4 MHz reference signals
- Gated phase comparison for an optimum noise ratio
- Circuit for obtaining the chrominance control voltage and a reference voltage
- Circuit for generating the colour killer signal and the identification signal

### Demodulator part


- Two synchronous demodulators for the (B-Y) and (R-Y) signals
- PAL flip-flop and PAL switch
- Flyback blanking incorporated in the synchronous demodulators
- (R-Y) and (B-Y) signal output stages, which are controlled by the colour killer with switchable d.c. voltage levels

### QUICK REFERENCE DATA

Supply voltage	$V_p = V_{9-24}$	typ.	12 V
Supply current	$I_g$	typ.	58 mA
Chrominance input signal (peak-to-peak value)	$V_{1-24(p-p)}$		10 to 200 mV
Sandcastle pulse			
burst gating level	$V_{20-24}$	>	7,5 V
blanking level	$V_{20-24}$	>	1,8 V
Colour difference output signals			
peak-to-peak values			
-(R-Y) signal	$V_{11-24(p-p)}$	typ.	1,05 V $\pm$ 3 dB
-(B-Y) signal	$V_{10-24(p-p)}$	typ.	1,33 V $\pm$ 3 dB

### PACKAGE OUTLINE

24-lead DIL; plastic (SOT-101A).

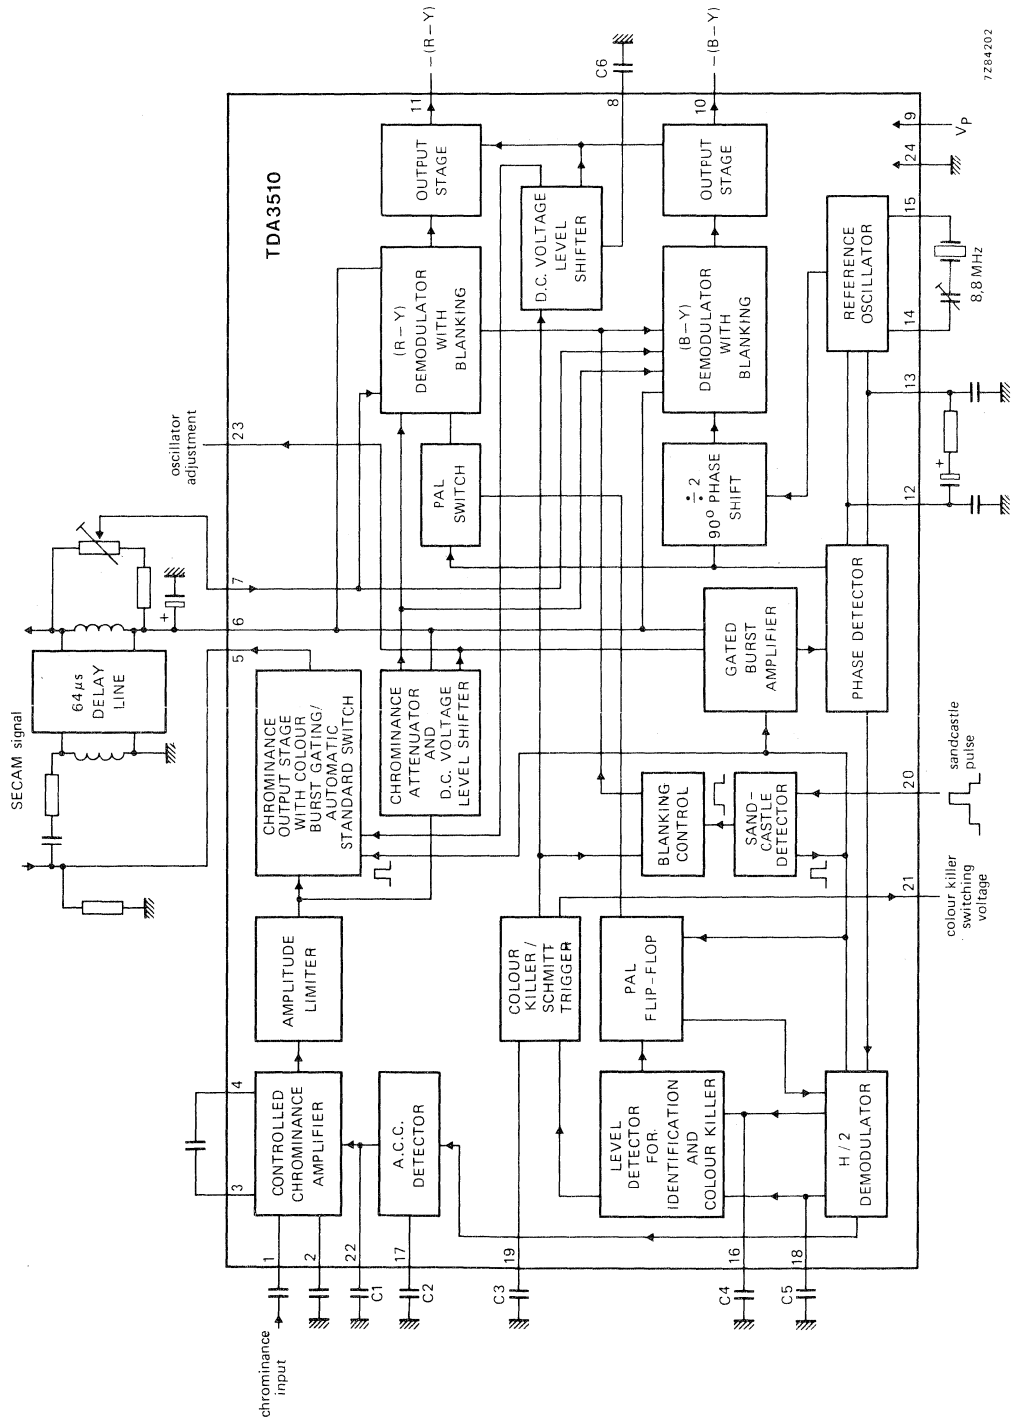

7284202

Fig. 1 Block diagram; for external capacitors see next page.



External capacitors in Fig. 1

capacitor	pins	
C1	22 – 24	filter capacitor for control voltage
C2	17 – 24	time constant for control voltage
C3	19 – 24	time constant for colour ON
C4	16 – 24	identification signal and colour OFF time constant
C5	18 – 24	load capacitor for the reference voltage
C6	8 – 24	time constant for the rise or fall time of the d.c. voltage level of the colour difference signal

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range	$V_P = V_{9-24}$	10,8 to 13,2 V
Currents		
at pin 5	$-I_5$	max. 10 mA
at pins 10 and 11	$-I_{10}, -I_{11}$	max. 1 mA
at pin 21	$I_{21}$	max. 10 mA
Total power dissipation	$P_{tot}$	max. 1,1 W
Storage temperature	$T_{stg}$	-20 to + 125 °C
Operating ambient temperature	$T_{amb}$	0 to + 70 °C

**CHARACTERISTICS** $V_P = 12 \text{ V}; T_{amb} = 25 \text{ °C}$ 

Supply current	$I_g$	typ. 58 mA
----------------	-------	------------

**Chrominance part**

Chrominance signal is asymmetric (pins 1, 2)

Input voltage range (peak-to-peak value)	$V_{1-24(p-p)}$	10 to 200 mV
Nominal input voltage (peak-to-peak value) with 75% colour bar signal	$V_{1-24(p-p)}$	typ. 100 mV
Input impedance	$ Z_i $	typ. 3,3 kΩ
Colour ON		
chrominance output voltage (peak-to-peak value) with 75% colour bar signal	$V_{5-24(p-p)}$	typ. 2 V
d.c. voltage at chrominance output	$V_{5-24}$	typ. 8 V
Colour OFF		
chrominance suppression		> 56 dB
d.c. voltage at chrominance output	$V_{5-24}$	typ. 4 V

**CHARACTERISTICS** (continued)**Reference voltage and control voltage part**

## Oscillator (8,8 MHz)

Gain	G <sub>14-15</sub>	>	8 dB
Input resistance	R <sub>15-24</sub>	typ.	270 Ω
Output resistance	R <sub>14-24</sub>	<	200 Ω
Catching range	Δf	typ.	500 Hz

## Sandcastle pulse (pin 20)

Burst gating level	V <sub>20-24</sub>	>	7,5 V
Blanking level	V <sub>20-24</sub>	>	1,8 V

## Colour switching voltage (open collector)

Maximum output current	I <sub>21max</sub>	typ.	10 mA
Colour ON	V <sub>21-24</sub>	typ.	V <sub>p</sub>
Colour OFF	V <sub>21-24</sub>	<	0,5 V
Reference output voltage	V <sub>18-24</sub>	typ.	5,5 V

## Colour killer voltages

colour OFF at	V <sub>18-16</sub>	typ.	0 V
or at	V <sub>19-24</sub>	>	6 V
colour ON at	V <sub>18-16</sub>	typ.	1,5 V
or at	V <sub>19-24</sub>	<	4 V
Colour unkill delay; depends on C3	t <sub>d</sub>	typ.	20 ms/μF
Identification ON	V <sub>16-18</sub>	<	200 mV

**Demodulator part**Delayed chrominance input signal (peak-to-peak value)  
with 75% colour bar signal

V <sub>7-24(p-p)</sub>	typ.	250 mV
------------------------	------	--------

## Colour difference output signals (peak-to-peak values)

-(R-Y) signal

V <sub>11-24(p-p)</sub>	typ.	1,05 V ± 3 dB
-------------------------	------	---------------

-(B-Y) signal

V <sub>10-24(p-p)</sub>	typ.	1,33 V ± 3 dB
-------------------------	------	---------------

Ratio of colour difference output signals  
(R-Y)/(B-Y)

$\frac{V_{11-24}}{V_{10-24}}$	typ.	0,79 ± 10 %
-------------------------------	------	-------------

## D.C. voltage at colour difference outputs

at colour ON

V <sub>10; 11-24</sub>	typ.	8 V
------------------------	------	-----

at colour OFF

V <sub>10; 11-24</sub>	typ.	4 V
------------------------	------	-----

## Signal attenuation at colour OFF

	>	60 dB
--	---	-------

## Residual 4,4 MHz signal

V <sub>10; 11-24</sub>	<	20 mV
------------------------	---	-------

H/2 ripple at (R-Y) output (peak-to-peak value)  
without input signal

V <sub>11-24(p-p)</sub>	<	10 mV
-------------------------	---	-------

## PAL DECODER

The TDA3560 is a monolithic integrated colour decoder for the PAL standard. It combines all functions required for the identification and demodulation of PAL signals. Furthermore it contains a luminance amplifier, an RGB-matrix and amplifier. These amplifiers supply output signals up to 5 V peak-to-peak (picture information) enabling direct drive of the output stages. The circuit also contains separate inputs for data insertion, analogue as well as digital, which can be used for Teletext information, channel number display, etc.

### QUICK REFERENCE DATA

Supply voltage	V <sub>1-27</sub>	typ. 12 V
Supply current	I <sub>1</sub>	typ. 85 mA
Luminance input signal (peak-to-peak value)	V <sub>10-27(p-p)</sub>	typ. 0,45 V
Chrominance input signal (peak-to-peak value)	V <sub>3-27(p-p)</sub>	55 to 1100 mV
Data input signals (peak-to-peak value)	V <sub>13,15,17-27(p-p)</sub>	typ. 1 V
RGB output signals at nominal contrast and saturation (peak-to-peak value)	V <sub>12,14,16-27(p-p)</sub>	typ. 5,25 V
Contrast control range		typ. 20 dB
Saturation control range		typ. 50 dB
Input for fast video-data signal switching	V <sub>9-27</sub>	typ. 1 V
Blanking input voltage	V <sub>8-27</sub>	typ. 1,5 V
Burst gating and black-level gating input voltage	V <sub>8-27</sub>	typ. 7 V

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

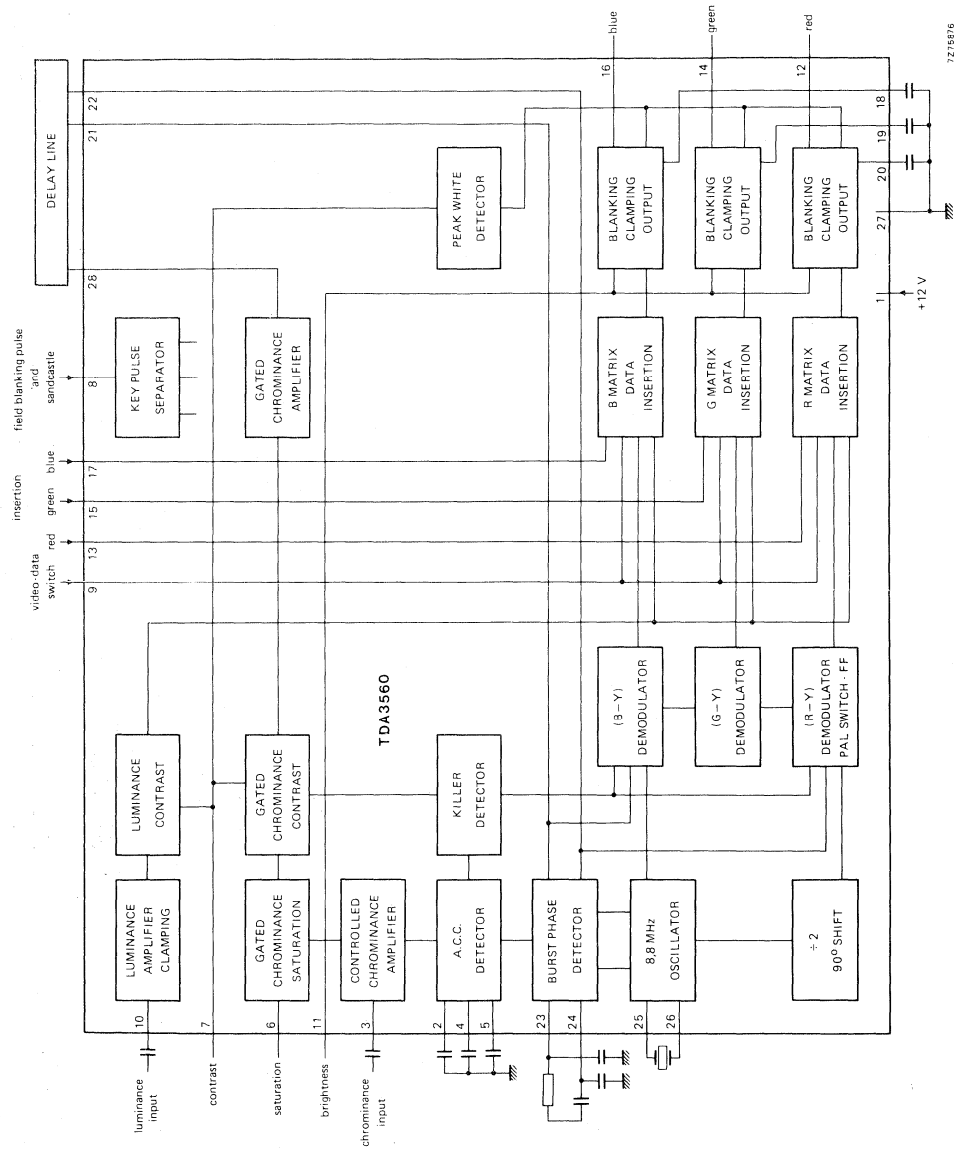


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

		min.	max.
Supply voltage	$V_P = V_{1-27}$	—	13,2 V
Input saturation voltage	$V_{6-27}$	0	$V_P$ V
Input contrast voltage	$V_{7-27}$	0	$V_P$ V
Input blanking pulse and sandcastle	$V_{8-27}$	0	$V_P$ V
Input video-data switch voltage	$V_{9-27}$	0	$V_P$ V
Input brightness voltage	$V_{11-27}$	0	$V_P$ V
Power dissipation	see Fig. 2		
Storage temperature	$T_{stg}$	−25 to +150 °C	
Operating ambient temperature	$T_{amb}$	−25 to +65 °C	

**CHARACTERISTICS**

$V_{1-27} = 12$  V;  $V_{10-27(p-p)} = 0,45$  V;  $V_{3-27(p-p)} = 500$  mV;  $T_{amb} = 25$  °C; measured in Fig. 6; unless otherwise specified

Supply voltage range	$V_P$	typ.	12 V 8 to 13,2 V
Supply current	$I_1$	typ.	85 mA

**Luminance amplifier**

Input voltage (peak-to-peak value)	$V_{10-27(p-p)}$	typ.	0,45 V
Input current	$I_{10}$	<	1 $\mu$ A
Contrast control range			−17 to +3 dB
Contrast control voltage range	see Fig. 3		

**Chrominance amplifier**

Input voltage (peak-to-peak value)	$V_{3-27(p-p)}$		55 to 1100 mV
A.C.C. control range		>	30 dB
Output signal (peak-to-peak value) * burst signal (peak-to-peak value) = 0,5 V	$V_{28-27(p-p)}$	typ.	1,7 V
Saturation control range		>	50 dB
Saturation control voltage range	see Fig. 4		
Phase shift between burst and chrominance *		<	5°
Tracking between luminance and chrominance with contrast control over a range of 10 dB, starting at maximum contrast		typ.	1 dB

\* At nominal contrast and saturation setting. Nominal setting = maximum contrast −3 dB; maximum saturation −6 dB.

## CHARACTERISTICS (continued)

## Reference oscillator

Phase locked loop:

– catching range (note 1)	>	500 Hz
– phase shift (note 2)	<	5°

Oscillator:

– input resistance	R <sub>26-27</sub>	typ.	300 Ω
– input capacitance	C <sub>26-27</sub>	<	10 pF
– output resistance	R <sub>25-27</sub>	typ.	200 Ω

A.C.C. generation:

– reference voltage	V <sub>4-27</sub>	typ.	4,6 V
– control voltage at nominal input signal	V <sub>2-27</sub>	typ.	4,7 V
– control voltage without burst	V <sub>2-27</sub>	typ.	2,4 V

## Demodulator circuit

Input burst signal amplitude (peak-to-peak value)	V <sub>21,22-27(p-p)</sub>	typ.	60 mV
---	----------------------------	------	-------

Ratio of demodulated signals

without luminance input signal  
(B-Y)/(R-Y)

$\frac{V_{16-27}}{V_{12-27}}$	typ.	1,78
-------------------------------	------	------

(G-Y)/(R-Y)

$\frac{V_{14-27}}{V_{12-27}}$	typ.	-0,51
-------------------------------	------	-------

(G-Y)/(B-Y)

$\frac{V_{14-27}}{V_{16-27}}$	typ.	-0,19
-------------------------------	------	-------

## RGB matrix and amplifiers

Output voltage (peak-to-peak value) (note 3)	V <sub>12,14,16-27(p-p)</sub>	typ.	5,25 V
Maximum white level		typ.	9,3 V
Brightness control voltage range	see Fig. 5		
Relative spread between R, G and B output signals		<	10 %
Variation of black level with contrast control	ΔV	<	200 mV
Relative black-level variation between the three stages during variation of contrast saturation, brightness and supply voltage		<	20 mV
Differential black-level drift over a temperature range of 40 °C		<	20 mV
Blanking level at RGB outputs		typ.	2,1 V
Signal-to-noise ratio of output signals (note 4)	S/N	>	62 dB

## Notes

1. Frequency referred to 4,4 MHz carrier frequency.
2. For ± 400 Hz deviation of the oscillator frequency.
3. For nominal setting of the controls.
4. The signal-to-noise ratio is specified as the nominal peak-to-peak output signal with respect to r.m.s. noise.

Residual 8,8 MHz and higher harmonics on RGB-outputs (peak-to-peak value)		<	150 mV
Output impedance RGB outputs	$ Z_o $	typ.	50 $\Omega$
Frequency response of total luminance and RGB amplifier circuits for $f = 0$ to 5 MHz		<	-3 dB
<b>Signal insertion</b>			
Input signals for an RGB output voltage of 5 V (peak-to-peak value)	$V_{13,15,17-27(p-p)}$	typ.	1 V
Difference between the black levels of the RGB signals and the inserted signals at the output	$\Delta V$	<	260 mV
Output rise time	$t_r$	typ.	50 ns
Differential delay time for the three channels	$t_d$	<	40 ns
<b>Video-data switching</b>			
Input voltage for switching from video to inserted signals	$V_{9-27}$		0,9 to 2 V
Input voltage for no data insertion	$V_{9-27}$	<	0,3 V
Delay between signal switching at the output and the signal switching input pulse at pin 9	$t_d$	<	20 ns
<b>Sandcastle and field blanking input (pin 8)</b>			
Burst gate and clamping pulse	$V_{8-27}$	>	7,5 V
RGB blanking level	$V_{8-27}$		2 to 6,5 V
on	$V_{8-27}$	<	0,8 V
off	$V_{8-27}$		

7Z75874

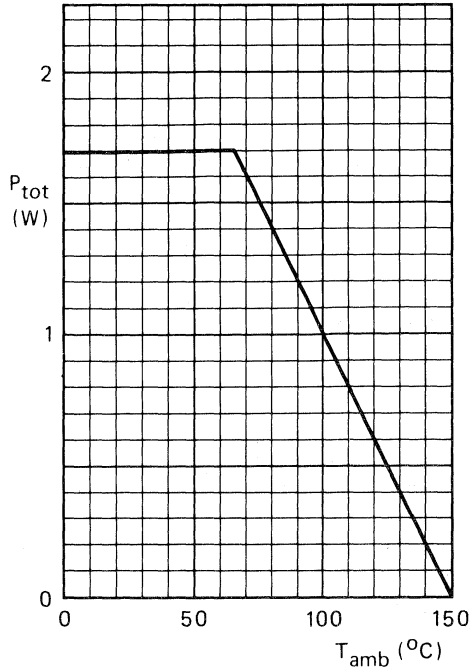


Fig. 2 Power derating curve.

7Z75873.2

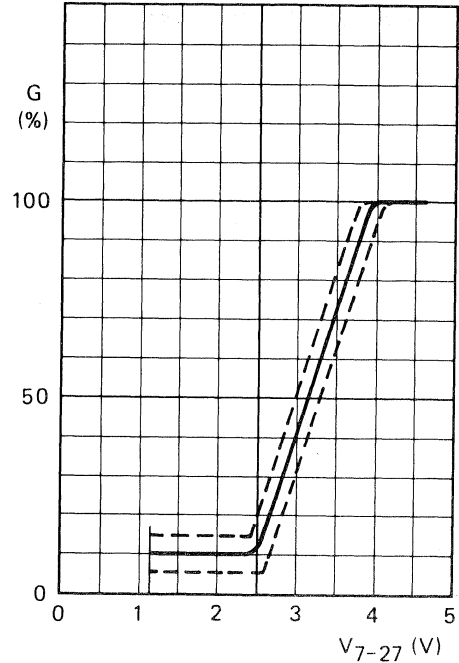


Fig. 3 Contrast control voltage range.

7Z75875.2

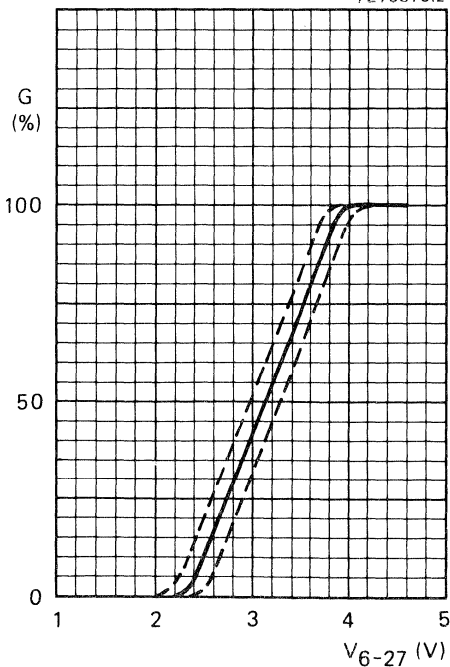


Fig. 4 Saturation control voltage range.

7Z75872.2

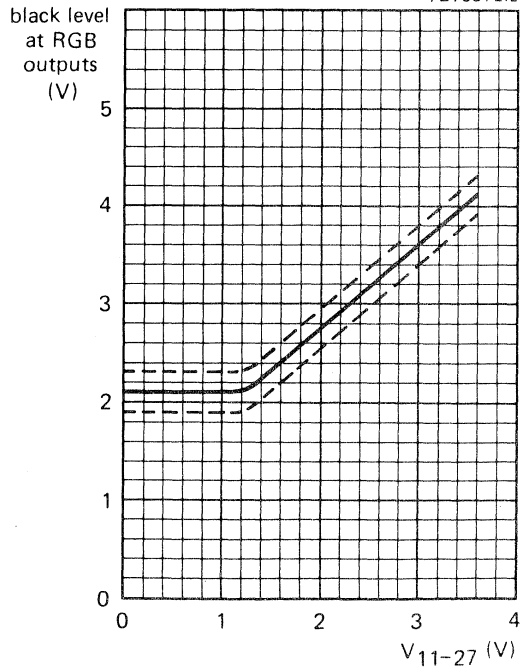


Fig. 5 Brightness control voltage range.



APPLICATION INFORMATION

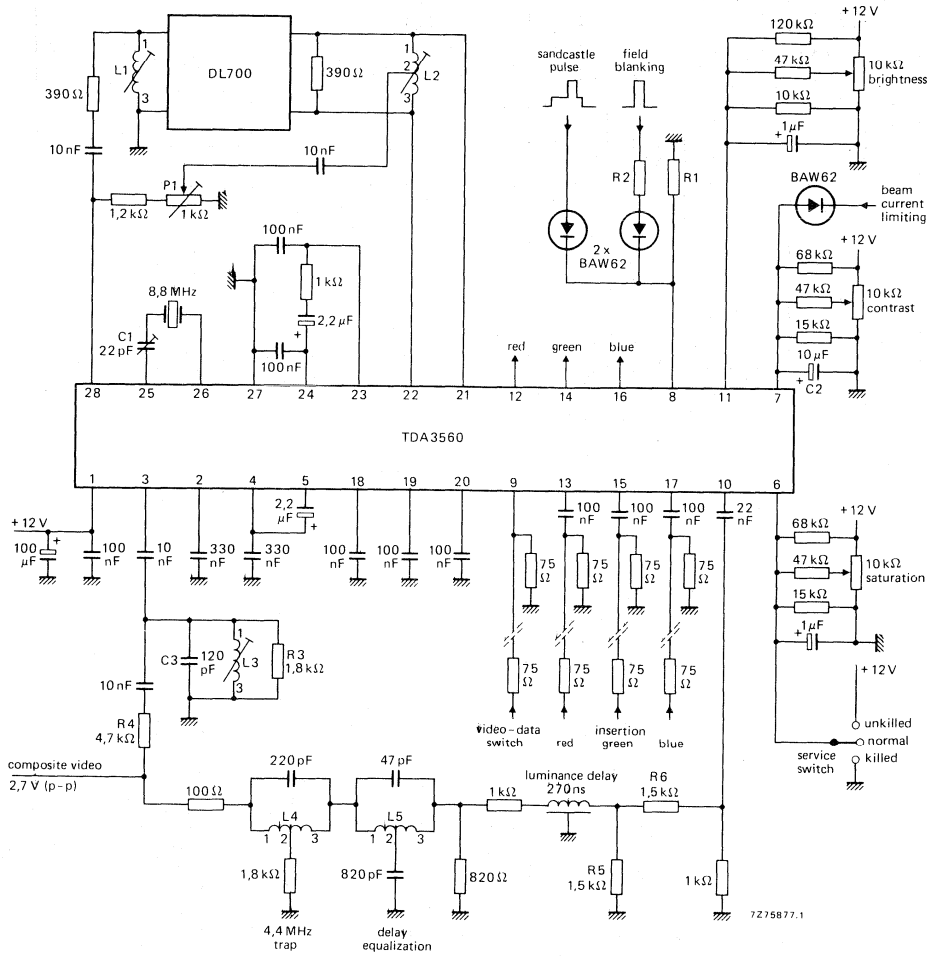


Fig. 6 Application circuit.

For adjustments see application information.

## APPLICATION INFORMATION

The function is described against the corresponding pin number.

### 1. + 12 V power supply

The circuit gives good operation in a supply voltage range between 8 and 13,2 V provided that the supply voltage for the controls is equal to the supply voltage for the TDA3560. All signal and control levels have a linear dependency on the supply voltage. The current taken by the device at 12 V is typically 85 mA. It is linearly dependent on the supply voltage.

### 2. Control voltage for identification

This pin requires a detection capacitor of about 330 nF for correct operation. The voltages available under various signal conditions are given in the specification.

### 3. Chrominance input

The chroma signal must be a.c.-coupled to the input. Its amplitude must be between 55 mV and 1100 mV peak-to-peak (25 mV to 500 mV peak-to-peak burst signal). All figures for the chroma signals are based on a colour bar signal with 75% saturation, that is the burst-to-chroma ratio of the input signal is 1 : 2,25.

### 4. Reference voltage A.C.C. detector

This pin must be decoupled by a capacitor of about 330 nF. The voltage at this pin is 4,6 V.

### 5. Control voltage A.C.C.

The A.C.C. is obtained by synchronous detection of the burst signal followed by a peak detector. A good noise immunity is obtained in this way and an increase of the colour for weak input signals is prevented. The recommended capacitor value at this pin is 2,2  $\mu$ F.

### 6. Saturation control

The saturation control range is in excess of 50 dB. The control voltage range is 2 to 4 V. Saturation control is a linear function of the control voltage.

When the colour killer is active, the saturation control voltage is reduced to a low level if the resistance of the external saturation control network is sufficiently high. Then the chroma amplifier supplies no signal to the demodulator. Colour switch-on can be delayed by proper choice of the time constant for the saturation control setting circuit.

When the saturation control pin is connected to the power supply the colour killer circuit is overruled so that the colour signal is visible on the screen. In this way it is possible to adjust the oscillator frequency without using a frequency counter (see also pins 25 and 26).

### 7. Contrast control

The contrast control range is 20 dB for a control voltage change from + 2 to + 4 V. Contrast control is a linear function of the control voltage. The output signal is suppressed when the control voltage is 1 V or less. If one or more output signals surpasses the level of 9 V the peak white limiter circuit becomes active and reduces the output signals via the contrast control by discharging C2 via an internal current sink.

### 8. Sandcastle and field blanking input

The output signals are blanked if the amplitude of the input pulse is between 2 and 6,5 V. The burst gate and clamping circuits are activated if the input pulse exceeds a level of 7,5 V.

The higher part of the sandcastle pulse should start just after the sync pulse to prevent clamping of video signal on the sync pulse. The width should be about 4  $\mu$ s for proper A.C.C. operation.

### 9. Video-data switching

The insertion circuit is activated by means of this input by an input pulse between 1 V and 2 V. In that condition, the internal RGB signals are switched off and the inserted signals are supplied to the output amplifiers. If only normal operation is wanted this pin should be connected to the negative supply. The switching times are very short (< 20 ns) to avoid coloured edges of the inserted signals on the screen.

### 10. Luminance signal input

The input signal should have a peak-to-peak amplitude of 0,45 V (peak white to sync) to obtain a black-white output signal of 5 V at nominal contrast. It must be a.c.-coupled to the input by a capacitor of about 22 nF. The signal is clamped at the input to an internal reference voltage. A 1 k $\Omega$  luminance delay line can be applied because the luminance input impedance is made very high. Consequently the charging and discharging currents of the coupling capacitor are very small and do not influence the signal level at the input noticeably. Additionally the coupling capacitor value may be small.

### 11. Brightness control

The black level of the RGB outputs can be set by the voltage on this pin (see Fig. 5). The minimum black level is identical to the blanking level. The black level can be set higher than 4 V however the available output signal amplitude is reduced (see pin 7). Brightness control also operates on the black level of the inserted signals.

### 12, 14, 16. RGB outputs

The output circuits for red, green and blue are identical. Output signals are 5 V (black-white) for nominal input signals and control settings. The black levels of the three outputs have the same value. The blanking level at the outputs is 2 V. The peak white level is limited to 9 V. When this level is exceeded the output signal amplitude is reduced via the contrast control (see pin 7).

### 13, 15, 17. Inputs for external RGB signals

The external signals must be a.c.-coupled to the inputs via a coupling capacitor of about 100 nF. Source impedance should not exceed 150  $\Omega$ . The input signal required for a 5 V peak-to-peak output signal is 1 V peak -to-peak. At the RGB outputs the black level of the inserted signal is identical to that of normal RGB signals. When these inputs are not used the coupling capacitors have to be connected to the negative supply.

### 18, 19, 20. Black level clamp capacitors

The black level clamp capacitors for the three channels are connected to these pins. The value of each capacitor should be about 100 nF.

### 21, 22. Inputs (B-Y) and (R-Y) demodulators

The input signal is automatically fixed to the required level by means of the burst phase detector and A.C.C. generator which are connected to this pin and pin 22. As the burst (applied differentially to those pins) is kept constant by the A.C.C., the colour difference signals automatically have the correct value.

## APPLICATION INFORMATION (continued)

**23, 24. Burst phase detector outputs**

At these pins the output of the burst phase detector is filtered and controls the reference oscillator. An adequate catching range is obtained with the time constants given in the application circuit (see Fig. 6).

**25, 26. Reference oscillator**

The frequency of the oscillator is adjusted by the variable capacitor C1. For frequency adjustment interconnect pin 21 and pin 22. The frequency can be measured by connecting a suitable frequency counter to pin 25.

**28. Output of the chroma amplifier**

Both burst and chroma signals are available at the output. The burst-to-chroma ratio at the output is identical to that at the input for nominal control settings. The burst signal is not affected by the controls. The amplitude of the input signal to the demodulator is kept constant by the A.C.C. Therefore the output signal at pin 28 will depend on the signal loss in the delay line.

Adjustments (see Fig. 6)

C1	8,8 MHz oscillator	
L1	phase delay line	= 10,7 $\mu$ H
L2	nominal value	= 10,7 $\mu$ H
L3	4,4 MHz chrominance input filter	= 10,7 $\mu$ H = L1
L4	4,4 MHz trap in luminance signal line	= 5,6 $\mu$ H
L5	delay equalization	= 66,1 $\mu$ H
P1	amplitude of direct chroma signal	
R1 } R2 }	field blanking $\frac{R1}{R1 + R2}$ x field blanking amplitude 2,0 V to 6,5 V.	

For a video input voltage of 1 V peak-to-peak: R4 = 1 k $\Omega$ ; R3, R5 and R6 can be omitted.

## PAL DECODER

The TDA3561A is a decoder for the PAL colour television standard. It combines all functions required for the identification and demodulation of PAL signals. Furthermore it contains a luminance amplifier, an RGB-matrix and amplifier. These amplifiers supply output signals up to 5 V peak-to-peak (picture information) enabling direct drive of the discrete output stages. The circuit also contains separate inputs for data insertion, analogue as well as digital, which can be used for text display systems (e.g. (Teletext/broadcast antiope), channel number display, etc. Additional to the TDA3560, the circuit includes the following features:

- The peak white limiter is only active during the time that the 9,3 V level at the output is exceeded. The start of the limiting function is delayed by one line period. This avoids peak white limiting by test patterns which have abrupt transitions from colour to white signals.
- The brightness control is obtained by inserting a variable pulse in the luminance channel. Therefore the ratio of brightness variation and signal amplitude at the three outputs will be identical and independent of the difference in gain of the three channels. Thus discolouring due to adjustment of contrast and brightness is avoided.
- Improved suppression of the internal RGB signals when the device is switched to external signals, and vice versa.
- Non-synchronized external RGB signals do not disturb the black level of the internal signals.
- Improved suppression of the residual 4,4 MHz signal in the RGB output stages.
- Cascoded stages in the demodulators and burst phase detector minimize the radiation of the colour demodulator inputs.
- High current capability of the RGB outputs and the chrominance output.

### QUICK REFERENCE DATA

Supply voltage	$V_{1-27}$	typ.	12 V
Supply current	$I_1$	typ.	85 mA
Luminance input signal (peak-to-peak value)	$V_{10-27(p-p)}$	typ.	0,45 V
Chrominance input signal (peak-to-peak value)	$V_{3-27(p-p)}$		55 to 1100 mV
Data input signals (peak-to-peak value)	$V_{13,15,17-27(p-p)}$	typ.	1 V
RGB output signals at nominal contrast and saturation (peak-to-peak value)	$V_{12,14,16-27(p-p)}$	typ.	5,25 V
Contrast control range		typ.	20 dB
Saturation control range		min.	50 dB
Input voltage for data insertion	$V_{9-27}$	min.	0,9 V
Blanking input voltage	$V_{8-27}$	typ.	1,5 V
Burst gating and black-level gating input voltage	$V_{8-27}$	typ.	7 V

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

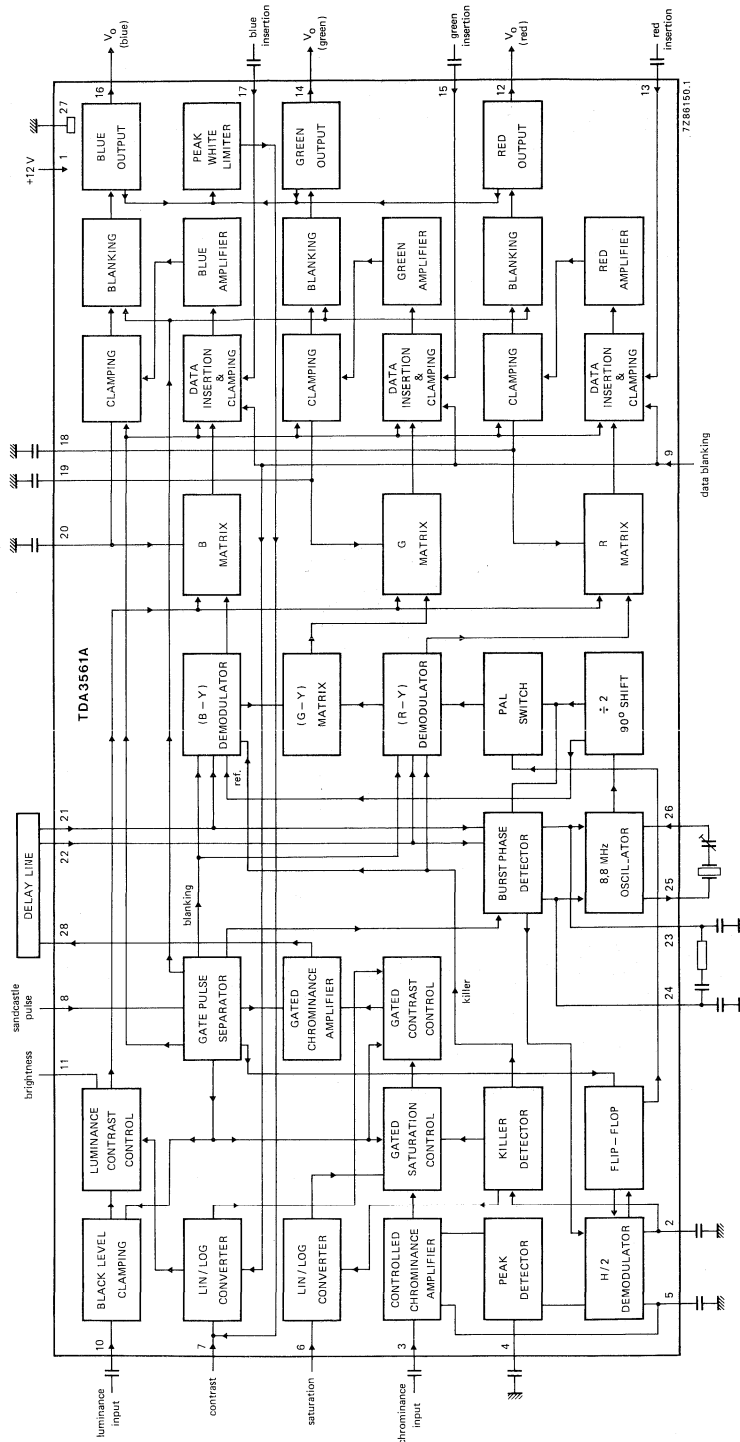


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_P = V_{1-27}$	max.	13,2 V
Total power dissipation; see also Fig. 2	$P_{tot}$	max.	1,7 W
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-25 to + 65 °C

**THERMAL RESISTANCE**

From junction to ambient	$R_{th j-a}$	=	50 K/W
--------------------------	--------------	---	--------

**CHARACTERISTICS** $V_P = V_{1-27} = 12 \text{ V}$ ;  $T_{amb} = 25 \text{ °C}$ ; unless otherwise specified

Supply voltage	$V_P = V_{1-27}$	typ.	12 V
			8 to 13,2 V
Supply current		typ.	85 mA
		<	115 mA
Total power dissipation	$P_{tot}$	typ.	1,0 W
		<	1,4 W

**Luminance input (pin 10)**

Input voltage (peak-to-peak value); note 1	$V_{10-27(p-p)}$	typ.	0,45 V
Input level before clipping	$V_{10-27}$	<	2 V
Input current; input level 2 V, clamp not active	$I_{10}$	typ.	0,15 $\mu\text{A}$
		<	1 $\mu\text{A}$
Contrast control range (see Fig. 3)			-17 to + 3 dB
Control voltage for 40 dB attenuation	$V_{7-27}$	typ.	1,2 V
Input current contrast control at $V_{7-27} = 3 \text{ V}$	$I_7$	<	10 $\mu\text{A}$

**Chrominance amplifier**

Input voltage (peak-to-peak value); note 2	$V_{3-27(p-p)}$	typ.	550 mV
			55 to 1100 mV
Input impedance	$ Z_{3-27} $	typ.	9 k $\Omega$
			6 to 12 k $\Omega$
Input capacitance	$C_{3-27}$	typ.	4 pF
		<	6 pF
A.C.C. control range		>	30 dB
Change of the burst signal at the output over the whole control range		<	1,5 dB
Gain at nominal contrast/saturation pin 3 to pin 28; note 3		>	32 dB
Output signal (peak-to-peak value) at nominal contrast/saturation; burst signal: 0,5 V peak to peak	$V_{28-27(p-p)}$	typ.	1,7 V
Maximum output voltage (peak-to-peak value) $R_L = 2 \text{ k}\Omega$	$V_{28-27(p-p)}$	typ.	4,0 V

**CHARACTERISTICS** (continued)**Chrominance amplifier** (continued)

Distortion of chrominance amplifier at $V_{28-27(p-p)} = 2\text{ V}$ up to $V_{3-27(p-p)} = 1\text{ V}$	d	typ. <	1,5 % 5 %
Frequency response between 0 and 5 MHz			-2 dB
Saturation control range (see Fig. 4)		>	50 dB
Input current saturation control at $V_{6-27} = 3\text{ V}$	$I_6$	<	15 $\mu\text{A}$
Tracking between luminance and chrominance with contrast control over a range of 10 dB		<	2 dB
Cross-coupling between luminance and chrominance amplifier; note 10		<	-46 dB
Signal-to-noise ratio at nominal input signal; note 11	S/N	>	56 dB
Phase shift between burst and chrominance at nominal contrast/saturation	$\Delta\varphi$	<	$\pm 5^\circ$
Output impedance of chrominance amplifier	$ Z_{28-27} $	typ.	25 $\Omega$
Maximum output current	$I_{28}$	<	15 mA

**Reference part**

Phase locked loop:		>	500 Hz
- catching range; note 4		typ.	700 Hz
- phase shift; note 5		<	$5^\circ$
Oscillator:			
- temperature coefficient of oscillator frequency; note 4		typ.	-1,5 Hz/K
- frequency deviation for $V_p$ changing from 10 to 13,2 V; note 4		typ.	40 Hz
- input resistance (pin 26)	$R_{26-27}$	typ.	340 $\Omega$
- input capacitance (pin 26)	$C_{26-27}$	<	260 to 420 $\Omega$ 10 pF
- output resistance (pin 25)	$R_{25-27}$	typ.	150 $\Omega$
- output voltage (peak-to-peak value; pin 25)	$V_{25-27(p-p)}$	typ.	100 to 200 $\Omega$ 700 mV
A.C.C. generation:			
- reference voltage (pin 4)	$V_{4-27}$	typ.	4,9 V
- control voltage at nominal input signal (pin 2)	$V_{2-27}$	typ.	5,1 V
- control voltage without chrominance input (pin 2)	$V_{2-27}$	typ.	2,65 V
- colour-off voltage (pin 2)	$V_{2-27}$	typ.	3,15 V
- colour-on voltage (pin 2)	$V_{2-27}$	typ.	3,4 V
- identification-on voltage (pin 2)	$V_{2-27}$	typ.	1,9 V
- change in burst amplitude with supply voltage ( $\pm 10\%$ )			proportional
- change in burst amplitude with temperature		typ.	0,1 %/K
- voltage at pin 5 at nominal input signal	$V_{5-27}$	<	0,25 %/K 5 V



**Demodulator part**

Input burst signal amplitude (peak-to-peak value) between pins 21 and 22; note 6	$V_{21-22(p-p)}$	typ.	100 mV
Input impedance between pins 21 and 22	$ Z_{21-22} $	typ.	2 k $\Omega$
Ratio of demodulated signals for equal input signals at pins 21 and 22 (B-Y)/(R-Y)	$\frac{V_{16-27}}{V_{12-27}}$	typ.	1,78 $\pm$ 10%
(G-Y)/(R-Y); no (B-Y) signal	$\frac{V_{14-27}}{V_{12-27}}$	typ.	-0,51 $\pm$ 10%
(G-Y)/(B-Y); no (R-Y) signal	$\frac{V_{14-27}}{V_{16-27}}$	typ.	-0,19 $\pm$ 25%
Frequency response between 0 and 1 MHz			-3 dB
Cross talk between colour demodulated signals	>		40 dB
Phase difference between (R-Y) signal and (R-Y) reference signal	<		5 $^{\circ}$
Phase difference between (R-Y) and (B-Y) reference signals	typ.		90 $^{\circ}$ 85 to 95 $^{\circ}$

**R.G.B. matrix and amplifiers**

Output voltage (peak-to-peak value) at nominal luminance/contrast (black to white); note 3	$V_{12,14,16-27(p-p)}$	typ.	5,4 V 4,5 to 6,3 V
Output voltage (peak-to-peak value) of the RED channel at nominal contrast/saturation and no luminance signal at the input, (R-Y) signal	$V_{12-27(p-p)}$	typ.	5,25 V 3,7 to 6,7 V
Maximum peak white level; note 7		typ.	9,3 V 9,0 to 9,6 V
Maximum output current	$I_{12,14,16}$	<	15 mA
Black level at the output for a brightness control voltage of 2 V	$V_{12,14,16-27}$	typ.	2,6 V
Difference in black level between the three channels at an output level of 3 V; note 8	$\Delta V$	<	200 mV
Black level shift with vision contents		<	40 mV
Brightness control voltage range	see Fig. 5		
Input current brightness control	$I_{11}$	<	50 $\mu$ A
Variation of black level with temperature	$\Delta V$	typ. <	0,35 mV/K 1,0 mV/K
Variation of black level with contrast control	$\Delta V$	typ. <	10 mV 200 mV
Relative spread between the R, G and B output signals		<	10 %
Relative black-level variation between the three channels during variation of contrast and supply voltage		typ. <	0 mV 20 mV

**CHARACTERISTICS** (continued)**RGB matrix and amplifier** (continued)

Differential black-level drift over a temperature range of 40 °C		typ. 0 mV < 20 mV
Blanking level at the RGB outputs		typ. 2,1 V 1,9 to 2,3 V
Difference in blanking level of the three channels		typ. 0 mV
Differential blanking level drift over a temperature range of 40 °C		typ. 0 mV
Tracking of output black level with supply voltage	$\frac{\Delta V_{bl}}{V_{bl}} \times \frac{V_P}{\Delta V_P}$	typ. 1,1
Signal-to-noise ratio of output signals; note 11	S/N	> 62 dB
Residual 4,4 MHz signal at RGB outputs (peak-to-peak value)		typ. 40 mV < 150 mV
Residual 8,8 MHz signal and higher harmonics at the RGB outputs (peak-to-peak value)		typ. 75 mV < 150 mV
Output impedance of RGB outputs	$ Z_{12,14,16-27} $	typ. 50 Ω
Frequency response of total luminance and RGB amplifier circuits for f = 0 to 5 MHz		< -3 dB
<b>Signal insertion</b> (pins 13,15 and 17)		
Input signals (peak-to-peak value) for an RGB output voltage of 5 V peak-to-peak	$V_{13,15,17-27(p-p)}$	typ. 1 V 0,85 to 1,1 V
Difference between the black levels of the RGB signals and the inserted signals at the output; note 9	$\Delta V$	< 260 mV
Output rise time	$t_r$	typ. 40 ns < 80 ns
Differential delay time for the three channels	$t_d$	typ. 0 ns < 40 ns
Input current	$I_{13,15,17}$	< 10 μA
<b>Data blanking</b> (pin 9)		
Input voltage for no data insertion	$V_{9-27}$	< 0,4 V
Input voltage for data insertion	$V_{9-27}$	> 0,9 V
Maximum input voltage	$V_{9-27}$	< 3 V
Delay of data blanking	$t_d$	< 20 ns
Input current	$I_g$	< 35 μA
Input impedance	$ Z_{9-27} $	typ. 10 kΩ
Suppression of the internal RGB signals when $V_{9-27} > 0,9 V$		> 46 dB

**Sandcastle input (pin 8)**

Level at which the RGB blanking is activated	$V_{8-27}$	typ. 1,5 V 1 to 2 V
Level at which burst gating and clamping pulse are separated	$V_{8-27}$	typ. 7,0 V 6,5 to 7,5 V
Delay between black level clamping and burst gating pulse	$t_d$	typ. 0,4 $\mu$ s
Input current for:		
$V_{8-27} = 0$ to 1 V	$-I_g$	< 1 mA
$V_{8-27} = 1$ to 8,5 V	$I_g$	typ. 20 $\mu$ A
$V_{8-27} = 8,5$ to 12 V	$I_g$	< 2 mA

**Notes to the characteristics**

- Signal with the negative-going sync; amplitude includes sync pulse amplitude.
- Indicated is a signal for a colour bar with 75% saturation, so chrominance to burst ratio is 2,2 : 1.
- Nominal contrast is specified as the maximum contrast  $-3$  dB and nominal saturation as the maximum saturation  $-6$  dB.
- All frequency variations are referred to the 4,4 MHz carrier frequency.
- For  $\pm 400$  Hz deviation of the oscillator frequency.
- These signal amplitudes are determined by the a.c.c. circuit of the reference part.
- When this level is exceeded, the amplitude of the output signal is reduced via a discharge of the capacitor at pin 7 (contrast control). The start of the peak white limiting action has a delay of one line period.
- The variation of the black level depends directly on the gain of each channel during brightness control in the three channels. As a consequence, the black levels at the outputs (for output levels above or below 3 V) can have a difference which exceeds 200 mV. Because the amplitude and the black level change with brightness control have a direct relationship, no discolouring can occur, caused by adjustment of contrast and brightness.
- This difference occurs when the source impedance of the data signal inputs is 150  $\Omega$  and the black level clamp pulse duration is 4  $\mu$ s (sandcastle pulse). A lower difference is obtained when the impedance is lower.
- Cross-coupling is measured under the following condition. Input signals nominal, contrast and saturation such that nominal output signals are obtained. The signals at the output at which no signal should be available must be compared with the nominal output signal at that output.
- The signal-to-noise ratio is specified as peak-to-peak signal with respect to r.m.s. noise.

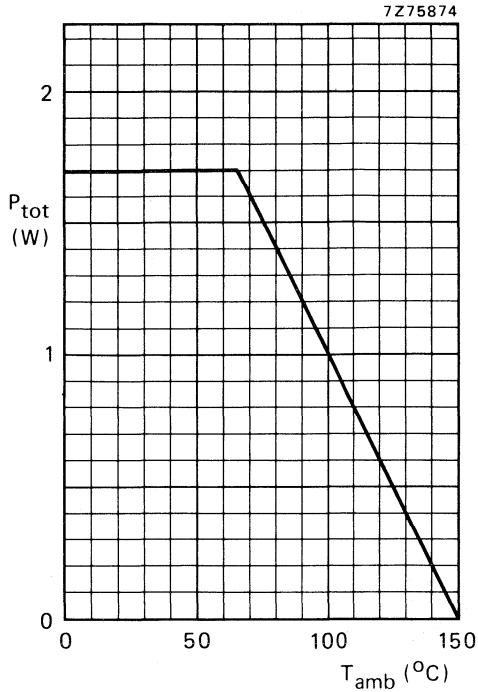


Fig. 2 Power derating curve.

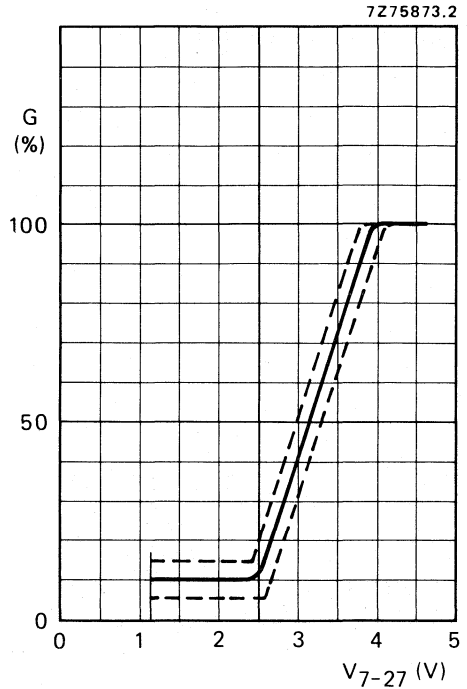


Fig. 3 Contrast control voltage range.

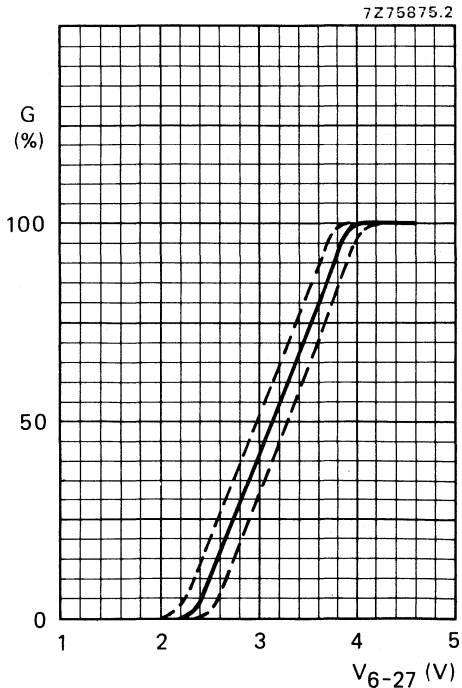


Fig. 4 Saturation control voltage range.

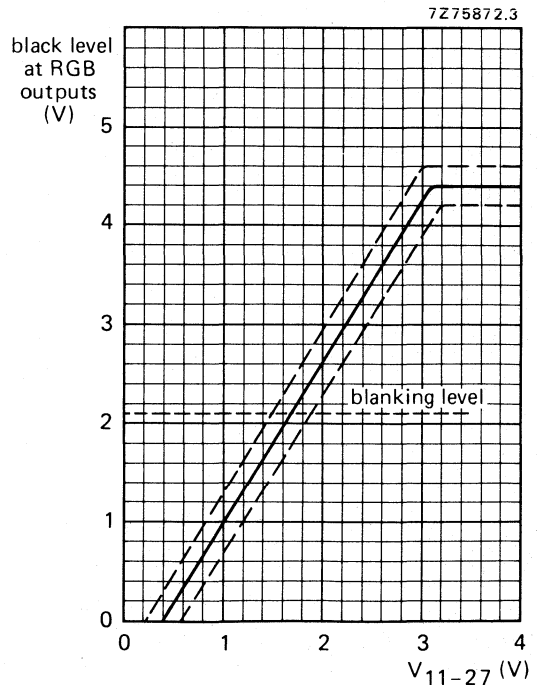


Fig. 5 Brightness control voltage range.

APPLICATION INFORMATION

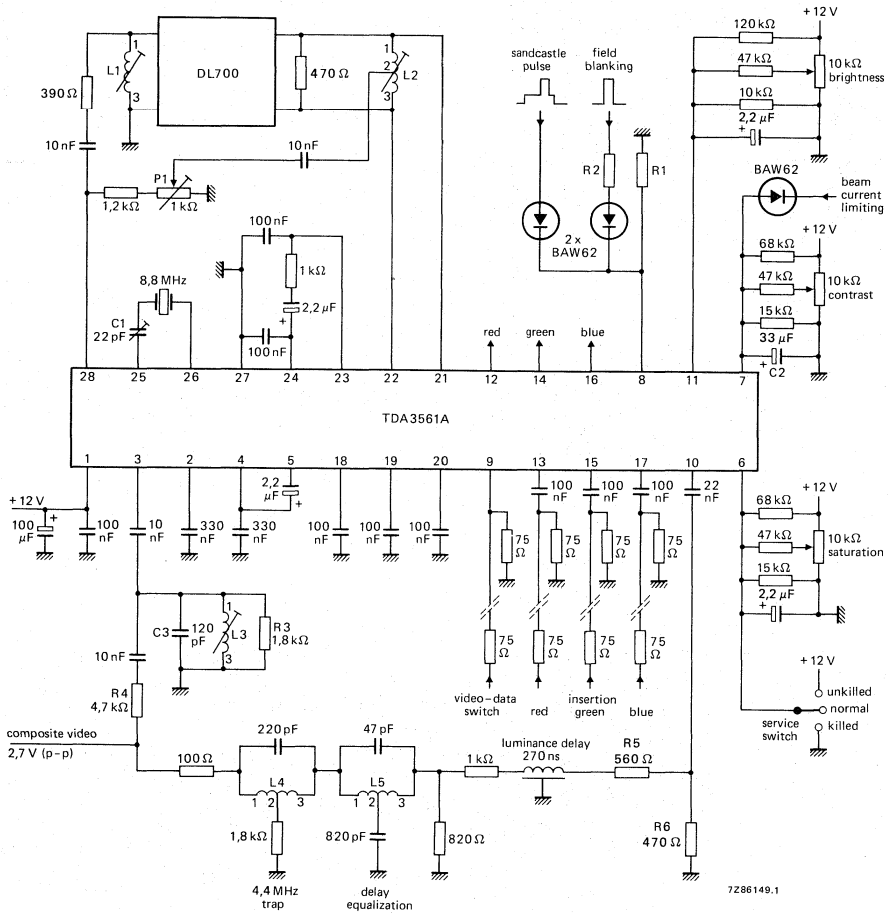


Fig. 6 Application circuit.

Adjustments (see Fig. 6)

- C1 8,8 MHz oscillator
  - L1 phase delay line
  - L2 nominal value
  - L3 4,4 MHz chrominance input filter
  - L4 4,4 MHz trap in luminance signal line
  - L5 delay equalization
  - P1 amplitude of direct chroma signal
  - R1 } field blanking  $\frac{R1}{R1 + R2} \times$  field blanking amplitude 2,0 V to 6,5 V.
  - R2 }
- = 10,7  $\mu$ H  
 = 10,7  $\mu$ H  
 = 10,7  $\mu$ H = L1  
 = 5,6  $\mu$ H  
 = 66,1  $\mu$ H

For a video input voltage of 1 V peak-to-peak: R3 can be omitted; R4 = 1 k $\Omega$ ; R5 must be short-circuited; R6 = 1 k $\Omega$ .

## APPLICATION INFORMATION

The function is described against the corresponding pin number.

### 1. + 12 V power supply

The circuit gives good operation in a supply voltage range between 8 and 13,2 V provided that the supply voltage for the controls is equal to the supply voltage for the TDA3561A. All signal and control levels have a linear dependency on the supply voltage. The current taken by the device at 12 V is typically 85 mA. It is linearly dependent on the supply voltage.

### 2. Control voltage for identification

This pin requires a detection capacitor of about 330 nF for correct operation. The voltages available under various signal conditions are given in the specification.

### 3. Chrominance input

The chroma signal must be a.c.-coupled to the input. Its amplitude must be between 55 mV and 1100 mV peak-to-peak (25 mV to 500 mV peak-to-peak burst signal). All figures for the chroma signals are based on a colour bar signal with 75% saturation, that is the burst-to-chroma ratio of the input signal is 1 : 2,25.

### 4. Reference voltage A.C.C. detector

This pin must be decoupled by a capacitor of about 330 nF. The voltage at this pin is 4,9 V.

### 5. Control voltage A.C.C.

The A.C.C. is obtained by synchronous detection of the burst signal followed by a peak detector. A good noise immunity is obtained in this way and an increase of the colour for weak input signals is prevented. The recommended capacitor value at this pin is 2,2  $\mu$ F.

### 6. Saturation control

The saturation control range is in excess of 50 dB. The control voltage range is 2 to 4 V. Saturation control is a linear function of the control voltage.

When the colour killer is active, the saturation control voltage is reduced to a low level if the resistance of the external saturation control network is sufficiently high. Then the chroma amplifier supplies no signal to the demodulator. Colour switch-on can be delayed by proper choice of the time constant for the saturation control setting circuit.

When the saturation control pin is connected to the power supply the colour killer circuit is overruled so that the colour signal is visible on the screen. In this way it is possible to adjust the oscillator frequency without using a frequency counter (see also pins 25 and 26).

### 7. Contrast control

The contrast control range is 20 dB for a control voltage change from + 2 to + 4 V. Contrast control is a linear function of the control voltage. The output signal is suppressed when the control voltage is 1 V or less. If one or more output signals surpasses the level of 9 V the peak white limiter circuit becomes active and reduces the output signals via the contrast control by discharging C2 via an internal current sink.

### 8. Sandcastle and field blanking input

The output signals are blanked if the amplitude of the input pulse is between 2 and 6,5 V. The burst gate and clamping circuits are activated if the input pulse exceeds a level of 7,5 V.

The higher part of the sandcastle pulse should start just after the sync pulse to prevent clamping of video signal on the sync pulse. The width should be about 4  $\mu$ s for proper A.C.C. operation.

### 9. Video-data switching

The insertion circuit is activated by means of this input by an input pulse between 1 V and 2 V. In that condition, the internal RGB signals are switched off and the inserted signals are supplied to the output amplifiers. If only normal operation is wanted this pin should be connected to the negative supply. The switching times are very short (< 20 ns) to avoid coloured edges of the inserted signals on the screen.

### 10. Luminance signal input

The input signal should have a peak-to-peak amplitude of 0,45 V (peak white to sync) to obtain a black-white output signal of 5 V at nominal contrast. It must be a.c.-coupled to the input by a capacitor of about 22 nF. The signal is clamped at the input to an internal reference voltage. A 1 k $\Omega$  luminance delay line can be applied because the luminance input impedance is made very high. Consequently the charging and discharging currents of the coupling capacitor are very small and do not influence the signal level at the input noticeably. Additionally the coupling capacitor value may be small.

### 11. Brightness control

The black level of the RGB outputs can be set by the voltage on this pin (see Fig. 5). The black level can be set higher than 4 V however the available output signal amplitude is reduced (see pin 7). Brightness control also operates on the black level of the inserted signals.

### 12, 14, 16. RGB outputs

The output circuits for red, green and blue are identical. Output signals are 5,25 V (R, G and B) at nominal input signals and control settings. The black levels of the three outputs have the same value. The blanking level at the outputs is 2,1 V. The peak white level is limited to 9,3 V. When this level exceeded the output signal amplitude is reduced via the contrast control (see pin 7).

### 13, 15, 17. Inputs for external RGB signals

The external signals must be a.c.-coupled to the inputs via a coupling capacitor of about 100 nF. Source impedance should not exceed 150  $\Omega$ . The input signal required for a 5 V peak-to-peak output signal is 1 V peak-to-peak. At the RGB outputs the black level of the inserted signal is identical to that of normal RGB signals. When these inputs are not used the coupling capacitors have to be connected to the negative supply.

### 18, 19, 20. Black level clamp capacitors

The black level clamp capacitors for the three channels are connected to these pins. The value of each capacitor should be about 100 nF.

### 21, 22. Inputs (B-Y) and (R-Y) demodulators

The input signal is automatically fixed to the required level by means of the burst phase detector and A.C.C. generator which are connected to pin 21 and pin 22. As the burst (applied differentially to those pins) is kept constant by the A.C.C., the colour difference signals automatically have the correct value.

**APPLICATION INFORMATION** (continued)**23, 24. Burst phase detector outputs**

At these pins the output of the burst phase detector is filtered and controls the reference oscillator. An adequate catching range is obtained with the time constants given in the application circuit (see Fig. 6).

**25, 26. Reference oscillator**

The frequency of the oscillator is adjusted by the variable capacitor C1. For frequency adjustment interconnect pin 21 and pin 22. The frequency can be measured by connecting a suitable frequency counter to pin 25.

**28. Output of the chroma amplifier**

Both burst and chroma signals are available at the output. The burst-to-chroma ratio at the output is identical to that at the input for nominal control settings. The burst signal is not affected by the controls. The amplitude of the input signal to the demodulator is kept constant by the A.C.C. Therefore the output signal at pin 28 will depend on the signal loss in the delay line.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3562A

## PAL/NTSC DECODER

### GENERAL DESCRIPTION

The TDA3562A is a decoder for the PAL and/or NTSC colour television standards. It combines all functions required for the identification and demodulation of PAL/NTSC signals. Furthermore it contains a luminance amplifier, an RGB-matrix and amplifier. These amplifiers supply output signals up to 4 V peak-to-peak (picture information) enabling direct drive of the discrete output stages. The circuit also contains separate inputs for data insertion, analogue as well as digital, which can be used for text display systems (e.g. Teletext/broadcast Antiope), channel number display, etc.

### Features

- A black-current stabilizer which controls the black-currents of the three electron-guns to a level low enough to omit the black-level adjustment
- Contrast control of inserted RGB signals
- No black-level disturbance when non-synchronized external RGB signals are available on the inputs
- NTSC capability with hue control

### QUICK REFERENCE DATA

Supply voltage (pin 1)	$V_P = V_{1-27}$	typ.	12 V
Supply current (pin 1)	$I_P = I_1$	typ.	80 mA
<b>Luminance amplifier (pin 8)</b>			
Input voltage (peak-to-peak value)	$V_{8-27(p-p)}$	typ.	450 mV
Contrast control range		typ.	20 dB
<b>Chrominance amplifier (pin 4)</b>			
Input voltage range (peak-to-peak value)	$V_{4-27(p-p)}$		40 to 1100 mV
Saturation control range		min.	50 dB
<b>RGB matrix and amplifiers</b>			
Output voltage at nominal luminance and contrast (peak-to-peak value)	$V_{13,15,17-27(p-p)}$	typ.	4 V
<b>Data insertion</b>			
Input signals (peak-to-peak value)	$V_{12,14,16-27(p-p)}$	typ.	1 V
<b>Data blanking (pin 9)</b>			
Input voltage for data insertion	$V_{9-27}$	min.	0,9 V
<b>Sandcastle input (pin 7)</b>			
Blanking input voltage	$V_{7-27}$	typ.	1,5 V
Burst gating and clamping input voltage	$V_{7-27}$	typ.	7 V

### PACKAGE OUTLINE

28-lead DIL; plastic, with internal heat spreader (SOT-117).

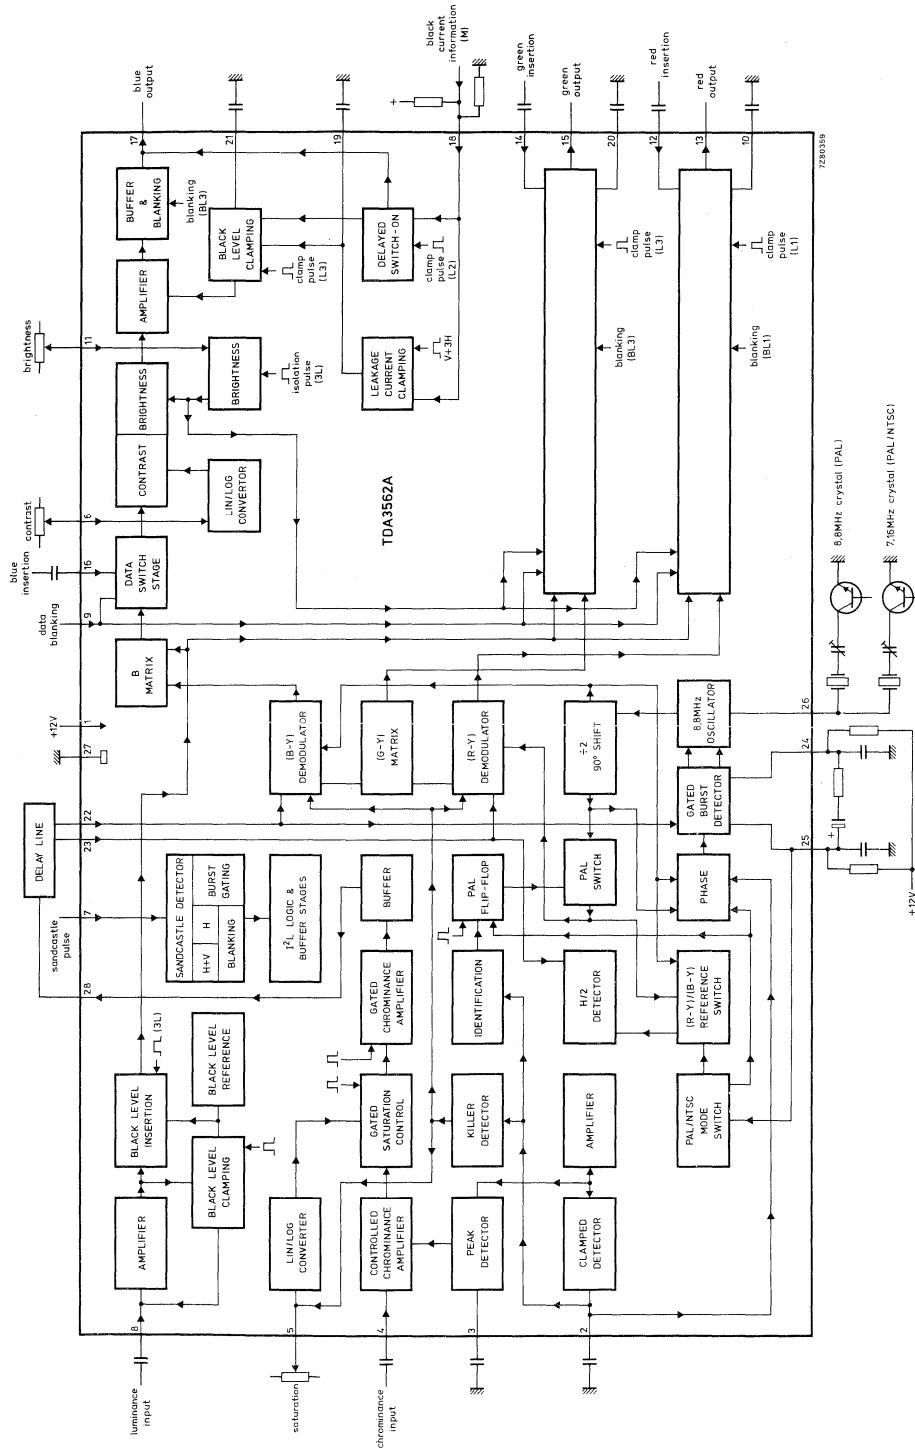


Fig. 1 Block diagram; for explanation of pulse mnemonics see Fig. 6.

## FUNCTIONAL DESCRIPTION

### Luminance amplifier

The luminance amplifier is voltage driven and requires an input signal of 450 mV peak-to-peak (positive video). The luminance delay line must be connected between the i.f. amplifier and the decoder. The input signal is a.c. coupled to the input (pin 8). After amplification, the black level at the output of the preamplifier is clamped to a fixed d.c. level by the black level clamping circuit.

During three line periods after vertical blanking, the luminance signal is blanked out and the black level reference voltage is inserted by a switching circuit. This black level reference voltage is controlled via pin 11 (brightness). At the same time the RGB signals are clamped. Noise and residual signals have no influence during clamping thus simple internal clamping circuitry is used.

### Chrominance amplifiers

The chrominance amplifier has an asymmetrical input. The input signal must be a.c. coupled (pin 4) and have a minimum amplitude of 40 mV peak-to-peak. The gain control stage has a control range in excess of 30 dB, the maximum input signal must not exceed 1,1 V peak-to-peak, otherwise clipping of the input signal will occur. From the gain control stage the chrominance signal is fed to the saturation control stage. Saturation is linear controlled via pin 5. The control voltage range is 2 to 4 V, the input impedance is high and the saturation control range is in excess of 50 dB. The burst signal is not affected by saturation control. The signal is then fed to a gated amplifier which has a 12 dB higher gain during the chrominance signal. As a result the signal at the output (pin 28) has a burst to chrominance ratio which is 6 dB lower than that of the input signal when the saturation control is set at -6 dB. The chrominance output signal is fed to the delay line and, after matrixing, is applied to the demodulator input pins (pins 22 and 23). These signals are fed to the burst phase detector.

### Oscillator and identification circuit

The burst phase detector is gated with the narrow part of the sandcastle pulse (pin 7). In the detector the (R-Y) and (B-Y) signals are added to provide the composite burst signal again. This composite signal is compared with the oscillator signal divided-by-2 (R-Y) reference signal. The control voltage is available at pins 24 and 25, and is also applied to the 8,8 MHz oscillator. The 4,4 MHz signal is obtained via the divide-by-2 circuit, which generates both the (B-Y) and (R-Y) reference signals and provides a 90° phase shift between them.

The flip-flop is driven by pulses obtained from the sandcastle detector. For the identification of the phase at PAL mode, the (R-Y) reference signal coming from the PAL switch, is compared to the vertical signal (R-Y) of the PAL delay line. This is carried out in the H/2 detector, which is gated during burst. When the phase is incorrect, the flip-flop gets a reset from the identification circuit. When the phase is correct, the output voltage of the H/2 detector is directly related to the burst amplitude so that this voltage can be used for the a.c.c. To avoid 'blooming-up' of the picture under weak input signal conditions the a.c.c. voltage is generated by peak detection of the H/2 detector output signal.

The killer and identification circuits get their information from a gated output signal of the H/2 detector. Killing is obtained via the saturation control stage and the demodulators to obtain good suppression. The time constant of the saturation control (pin 5) provides a delayed switch-on after killing.

Adjustment of the oscillator is achieved by variation of the burst phase detector load resistance between pins 24 and 25 (see Fig. 7). With this application the trimmer capacitor in series with the 8,8 MHz crystal (pin 26) can be replaced by a fixed value capacitor to compensate for unbalance of the phase detector.

**FUNCTIONAL DESCRIPTION (continued)****Demodulator**

The (R-Y) and (B-Y) demodulators are driven by the colour difference signals from the delay-line matrix circuit and the reference signals from the 8,8 MHz divider circuit. The (R-Y) reference signal is fed via the PAL-switch. The output signals are fed to the R and B matrix circuits and to the (G-Y) matrix to provide the (G-Y) signal which is applied to the G-matrix. The demodulation circuits are killed and blanked by by-passing the input signals.

**NTSC mode**

The NTSC mode is switched on when the voltage at the burst phase detector outputs (pins 24 and 25) is adjusted below 9 V. To ensure reliable application the phase detector load resistors are external. When the TDA3562A is used only for PAL these two 33 k $\Omega$  resistors must be connected to +12 V (see Fig. 7). For PAL/NTSC application the value of each resistor must be reduced to 10 k $\Omega$  and connected to the slider of a potentiometer (see Fig. 8). The switching transistor brings the voltage at pins 24 and 25 below 9 V which switches the circuit to the NTSC mode. The position of the PAL flip-flop ensures that the correct phase of the (R-Y) reference signal is supplied to the (R-Y) demodulator. The drive to the H/2 detector is now provided by the (B-Y) reference signal. In the PAL mode it is driven by the (R-Y) reference signal.

Hue control is realized by changing the phase of the reference drive to the burst phase detector. This is achieved by varying the voltage at pins 24 and 25 between 7,5 and 8,5 V, nominal position 8,0 V. The hue control characteristic is shown in Fig. 5.

**RGB matrix and amplifiers**

The three matrix and amplifier circuits are identical and only one circuit will be described.

The luminance and the colour difference signals are added in the matrix circuit to obtain the colour signal, which is then fed to the contrast control stage. The contrast control voltage is supplied to pin 6 (high-input impedance). The control range is +5 dB to -15 dB nominal. The relationship between the control voltage and the gain is linear (see Fig. 2).

During the 4-line period after blanking a pulse is inserted at the output of the contrast control stage. The amplitude of this pulse is varied by a control voltage at pin 11. This applies a variable offset to the normal black level, thus providing brightness control. The brightness control range is 1 V to 3 V.

While this offset level is present, the 'black-current' input impedance (pin 18) is high and the internal clamp circuit is activated. The clamp circuit then compares the reference voltage at pin 19 with the voltage developed across the external resistor network  $R_A$  and  $R_B$  (pin 18) which is provided by picture tube beam current. The output of the comparator is stored in capacitors connected from pins 10, 20 and 21 to ground which controls the black level at the output. The reference voltage is composed by the resistor divider network and the leakage current of the picture tube into this bleeder. During the sample pulse  $L_0$ , this voltage is stored in the capacitor connected to pin 19, which ensures that the leakage current of the CRT does not influence the black current measurement.

The RGB output signals can never exceed a level of 10 V. When the signal tends to exceed this level the output signal is clipped. The black level at the outputs (pins 13, 15 and 17) will be about 3 V. This level depends on the spread of the guns of the picture tube. If a beam current stabilizer is not used it is possible to stabilize the black levels at the outputs, which in this application must be connected to the black current measuring input (pin 18) via a resistor network.

**Data insertion**

Each colour amplifier has a separate input for data insertion. A 1 V peak-to-peak input signal provides a 4 V peak-to-peak output signal. To avoid the 'black-level' of the inserted signal differing from the black level of the normal video signal, the data is clamped to the black level of the luminance signal. Therefore a.c. coupling is required for the data inputs. To avoid a disturbance of the blanking level due to the clamping circuit, the source impedance of the driver circuit must not exceed 150  $\Omega$ .

The data insertion circuit is activated by the data blanking input (pin 9). When the voltage at this pin exceeds a level of 0,9 V, the RGB matrix circuits are switched off and the data amplifiers are switched on. To avoid coloured edges, the data blanking switching time is short.

The amplitude of the data output signals is controlled by the contrast control at pin 6. The black level is equal to the video black level and can be varied between 2 and 4 V (nominal condition) by the brightness control voltage at pin 11.

Non-synchronized data signals do not disturb the black level of the internal signals.

**Blanking of RGB and data signals**

Both the RGB and data signals can be blanked via the sandcastle input (pin 7). A slicing level of 1,5 V is used for this blanking function, so that the wide part of the sandcastle pulse is separated from the remainder of the pulse. During blanking a level of +1 V is available at the output.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_P = V_{1-27}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		-25 to +70 °C

**THERMAL RESISTANCE**

From junction to ambient (in free air)	$R_{th\ j-a}$	=	40 K/W
--	---------------	---	--------

DEVELOPMENT DATA

## CHARACTERISTICS

 $V_P = V_{1-27} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ V}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 1)</b>					
Supply voltage	$V_P = V_{1-27}$	10,8	12	13,2	V
Supply current	$I_P = I_1$	—	80	110	mA
Total power dissipation	$P_{\text{tot}}$	—	0,95	1,3	W
<b>Luminance amplifier (pin 8)</b>					
Input voltage (note 1) (peak-to-peak value)	$V_{8-27(p-p)}$	—	0,45	—	V
Input level before clipping	$V_{8-27}$	—	—	1	V
Input current	$I_8$	—	0,1	1	$\mu\text{A}$
Contrast control range (see Fig. 2)		-15	—	+5	dB
Input current contrast control	$I_7$	—	—	15	$\mu\text{A}$
<b>Chrominance amplifier (pin 4)</b>					
Input voltage (note 2) (peak-to-peak value)	$V_{4-27(p-p)}$	40	390	1100	mV
Input impedance	$ Z_{4-27} $	—	10	—	$\text{k}\Omega$
Input capacitance	$C_{4-27}$	—	—	6,5	pF
A.C.C. control range		30	—	—	dB
Change of the burst signal at the output over the whole control range		—	—	1	dB
Gain at nominal contrast/saturation pin 4 to pin 28 (note 3)		34	—	—	dB
Chrominance to burst ratio at nominal saturation (notes 2 and 3) at pin 28		—	12	—	dB
Maximum output voltage (peak-to-peak value); $R_L = 2 \text{ k}\Omega$	$V_{28-27(p-p)}$	4	5	—	V
Distortion of chrominance amplifier at $V_{28-27(p-p)} = 2 \text{ V}$ (output) up to $V_{4-27(p-p)} = 1 \text{ V}$ (input)	d	—	—	5	%
Frequency response between 0 and 5 MHz	$\alpha_{28-4}$	—	—	-2	dB
Saturation control range (see Fig. 3)		50	—	—	dB
Input current saturation control (pin 5)	$I_5$	—	—	20	$\mu\text{A}$
Cross-coupling between luminance and chrominance amplifier (note 4)		—	—	-46	dB
Signal-to-noise ratio at nominal input signal (note 5)	S/N	56	—	—	dB
Phase shift between burst and chrominance at nominal contrast/saturation	$\Delta\varphi$	—	—	$\pm 5$	deg
Output impedance of chrominance amplifier	$ Z_{28-27} $	—	10	—	$\Omega$
Output current	$I_{28}$	—	—	15	mA

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Reference part</b>					
Phase-locked-loop catching range (note 6)	$\Delta f$	500	700	—	Hz
phase shift for $\pm 400$ Hz deviation of $f_{osc}$ (note 6)	$\Delta \varphi$	—	—	5	deg
<b>Oscillator</b>					
temperature coefficient of oscillator frequency (note 6)	$TC_{osc}$	—	-2	—	Hz/K
frequency variation when supply voltage increases from 10 V to 13,2 V (note 6)	$\Delta f_{osc}$	—	40	—	Hz
input resistance (pin 26)	$R_{26-27}$	—	400	—	$\Omega$
input capacitance (pin 26)	$C_{26-27}$	—	—	10	pF
<b>A.C.C. generation (pin 2)</b>					
control voltage at nominal input signal	$V_{2-27}$	—	4,9	—	V
control voltage without chrominance input	$V_{2-27}$	—	2,6	—	V
colour-off voltage	$V_{2-27}$	—	3,4	—	V
colour-on voltage	$V_{2-27}$	—	3,6	—	V
identification-on voltage	$V_{2-27}$	—	2,1	—	V
change in burst amplitude with temperature		—	0,1	0,25	%/K
voltage at pin 3 at nominal input signal	$V_{3-27}$	—	5,1	—	V
<b>Demodulator part</b>					
Input burst signal amplitude (peak-to-peak value) between pins 23 and 27 (note 7)	$V_{23-27(p-p)}$	—	80	—	mV
Input impedance between pins 22 or 23 and 27	$ Z_{22-27/23-27} $	—	1	—	k $\Omega$
Ratio of demodulated signals (note 8) (B-Y)/(R-Y)	$\frac{V_{17-27}}{V_{13-27}}$	—	1,78 $\pm$ 10%	—	
(G-Y)/(R-Y); no (B-Y) signal	$\frac{V_{15-27}}{V_{13-27}}$	—	-0,51 $\pm$ 10%	—	
(G-Y)/(B-Y); no (R-Y) signal	$\frac{V_{15-27}}{V_{17-27}}$	—	-0,19 $\pm$ 25%	—	
Frequency response between 0 and 1 MHz		—	—	-3	dB
Cross-talk between colour difference signals		40	—	—	dB
Phase difference between (R-Y) signal and (R-Y) reference signal	$\Delta \varphi$	—	—	5	deg
Phase difference between (R-Y) and (B-Y) reference signals	$\Delta \varphi$	85	90	95	deg

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>RGB matrix and amplifiers</b>					
Output voltage (peak-to-peak value) at nominal luminance/contrast (black-to-white) (note 3)	$V_{13,15,17-27(p-p)}$	3,5	4	4,5	V
Output voltage at pin 13 (peak-to-peak value) at nominal contrast/saturation and no luminance signal to (R-Y)	$V_{13-27(p-p)}$	—	4,2	—	V
Maximum peak-white level	$V_{13,15,17(m)}$	9,7	10	10,3	V
Available output current (pins 13,15,17)	$I_{13,15,17}$	10	—	—	mA
Difference between black level and measuring level at the output for a brightness control voltage at pin 11 of 2 V (note 9)	$\Delta V_{13,15,17-27}$	—	0	—	V
Difference in black level between the three channels without black current stabilization (note 10)		—	—	100	mV
Control range of black-current stabilization at $V_{b1} = 3$ V; $V_{11-27} = 2$ V		—	—	$\pm 2$	V
Black level shift with vision contents		—	—	40	mV
Brightness control voltage range			see Fig. 4		
Brightness control input current	$I_{11}$	—	—	5	$\mu$ A
Variation of black level with temperature	$\Delta V/\Delta T$	—	0	—	mV/K
Variation of black level with contrast*	$\Delta V$	—	—	100	mV
Relative spread between the R, G and B output signals		—	—	10	%
Relative black-level variation between the three channels during variation of contrast, brightness and supply voltage ( $\pm 10\%$ )		—	0	20	mV
Differential black-level drift over a temperature range of 40 °C*		—	0	20	mV
Blanking level at the RGB outputs		—	0,95	1,1	V
Difference in blanking level of the three channels		—	0	—	mV
Differential drift of the blanking levels over a temperature range of 40 °C		—	0	—	mV
Tracking of output black level with supply voltage	$\frac{\Delta V_{bl}}{V_{bl}} \times \frac{V_P}{\Delta V_P}$	—	1	—	
Tracking of contrast control between the three channels over a control range at 10 dB		—	—	0,5	dB

\* With respect to the measuring pulses.



## DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
Output signal during the clamp pulse (3L) after switch-on		7,5	—	—	V
Signal-to-noise ratio of output signals (note 5)	S/N	62	—	—	dB
Residual 4,4 MHz signal at RGB outputs (peak-to-peak value)		—	—	50	mV
Residual 8,8 MHz signal and higher harmonics at the RGB outputs (peak-to-peak value)		—	—	150	mV
Output impedance of RGB outputs	$ Z_{13,15,17-27} $	—	50	—	$\Omega$
Frequency response of total luminance and RGB amplifier circuits for $f = 0$ to 5 MHz		—	-1	-3	dB
Current source of output stage		2	3	—	mA
Difference of black level at the three outputs at nominal brightness*		—	—	10	mV
Tracking of brightness control		—	—	2	%
<b>Data insertion</b> (pins 12, 14 and 16)					
Input signals (peak-to-peak value) for an RGB output voltage of 4 V (peak-to-peak) at nominal contrast	$V_{12,14,16-27(p-p)}$	0,9	1	1,1	V
Difference between the black levels of the RGB signals and the inserted signals at the output (note 11)	$\Delta V$	—	—	100	mV
Output rise time	$t_r$	—	—	80	ns
Differential delay time for the three channels	$t_d$	—	0	40	ns
Input current	$I_{12,14,16}$	—	—	10	$\mu A$
<b>Data blanking</b> (pin 9)					
Input voltage for no data insertion	$V_{9-27}$	—	—	0,4	V
Input voltage for data insertion	$V_{9-27}$	0,9	—	—	V
Maximum input voltage	$V_{9-27(m)}$	—	—	3	V
Delay of data blanking	$t_d$	—	—	20	ns
Input resistance	$R_{9-27}$	7	10	13	k $\Omega$
Suppression of the internal RGB signals when $V_{9-27} > 0,9$ V		46	—	—	dB

\* With respect to the measuring pulses.

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Sandcastle input (pin 7)</b>					
Level at which the RGB blanking is activated	V <sub>7-27</sub>	1	1,5	2	V
Level at which the horizontal pulses are separated	V <sub>7-27</sub>	3	3,5	4	V
Level at which burst gating and clamping pulse are separated	V <sub>7-27</sub>	6,5	7,0	7,5	V
Delay between black level clamping and burst gating pulse	t <sub>d</sub>	—	0,6	—	μs
Input current					
at V <sub>7-27</sub> = 0 to 1 V	-I <sub>7</sub>	—	—	1	mA
at V <sub>7-27</sub> = 1 to 8,5 V	I <sub>7</sub>	—	50	—	μA
at V <sub>7-27</sub> = 8,5 to 12 V	I <sub>7</sub>	—	—	2	mA
<b>Black current stabilization (pin 18)</b>					
D.C. bias voltage	V <sub>18-27</sub>	3,5	5	7,0	V
Difference between input voltage for 'black' current and leakage current	ΔV	—	0,5	—	V
Input current during 'black' current	I <sub>18</sub>	—	—	1	μA
Input current during scan	I <sub>18</sub>	—	—	10	mA
Internal limiting at pin 18	V <sub>18-27</sub>	—	9	—	V
Switching threshold for 'black' current control ON	V <sub>18-27</sub>	—	8	—	V
Input resistance during scan	R <sub>18-27</sub>	—	1,5	—	kΩ
D.C. input current during scan at pins 10, 20 and 21	I <sub>10,20,21</sub>	—	—	50	nA
Maximum charge/discharge current during measuring time at pins 10,19,20 and 21	I <sub>c/d</sub>	—	1,0	—	mA
<b>NTSC</b>					
Level at which the PAL/NTSC switch is activated (pins 24 and 25)	V <sub>24-25</sub>	—	9	—	V
Average output current (note 12)	I <sub>24+25</sub>	75	90	105	μA
Hue control			see Fig. 5		

**Notes to the characteristics**

1. Signal with the negative-going sync; amplitude includes sync amplitude.
2. Indicated is a signal for a colour bar with 75% saturation; chrominance to burst ratio is 2,2 : 1.
3. Nominal contrast is specified as the maximum contrast  $-5$  dB and nominal saturation as the maximum saturation  $-6$  dB.
4. Cross coupling is measured under the following condition: input signal nominal, contrast and saturation such that nominal output signals are obtained. The signals at the output at which no signal should be available must be compared with the nominal output signal at that output.
5. The signal-to-noise ratio is defined as peak-to-peak signal with respect to r.m.s. noise.
6. All frequency variations are referred to 4,4 MHz carrier frequency.
7. These signal amplitudes are determined by the a.c.c. circuit of the reference part.
8. The demodulators are driven by a chrominance signal of equal amplitude for the (R-Y) and the (B-Y) components. The phase of the (R-Y) chrominance signal equals the phase of the (R-Y) reference signal. This also applies to the (B-Y) signals.
9. This value depends on the gain setting of the RGB output amplifiers and the drift of the picture tube guns. Higher black level values are possible (up to 5 V) but in that application the amplitude of the output signal is reduced.
10. The variation of the black-level during brightness control in the three different channels is directly dependent on the gain of each channel. Discolouration during adjustments of contrast and brightness does not occur because amplitude and the black-level change with brightness control are directly related.
11. This difference occurs when the source impedance of the data signals is  $150 \Omega$  and the black level clamp pulse width is  $4 \mu\text{s}$  (sandcastle pulse). For a lower impedance the difference will be lower.
12. The voltage at pins 24 and 25 can be changed by connecting the load resistors ( $10 \text{ k}\Omega$  in this application) to the slider bar of the hue control potentiometer (see Fig. 8). When the transistor is switched on, the voltage at pins 24 and 25 is reduced below 9 V, and the circuit is switched to NTSC mode.

DEVELOPMENT DATA

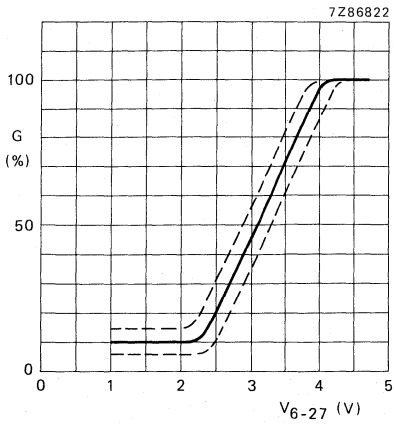


Fig. 2 Contrast control voltage range.

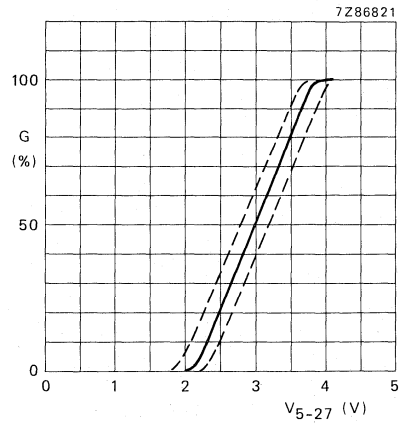


Fig. 3 Saturation control voltage range.

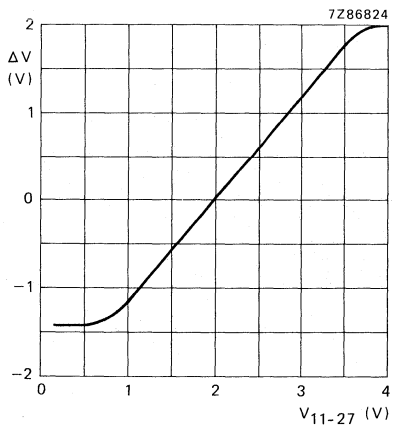


Fig. 4 Difference between black level and measuring level at the RGB outputs ( $\Delta V$ ) as a function of the brightness control input voltage ( $V_{11-27}$ ).

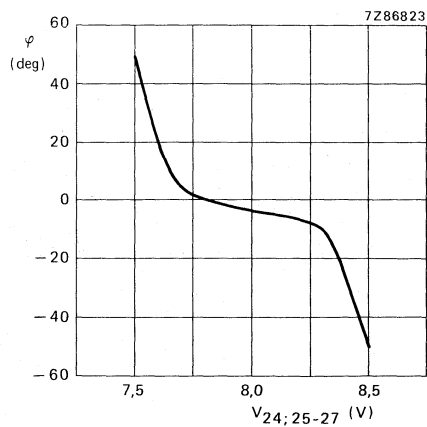


Fig. 5 Hue control voltage range.

DEVELOPMENT DATA

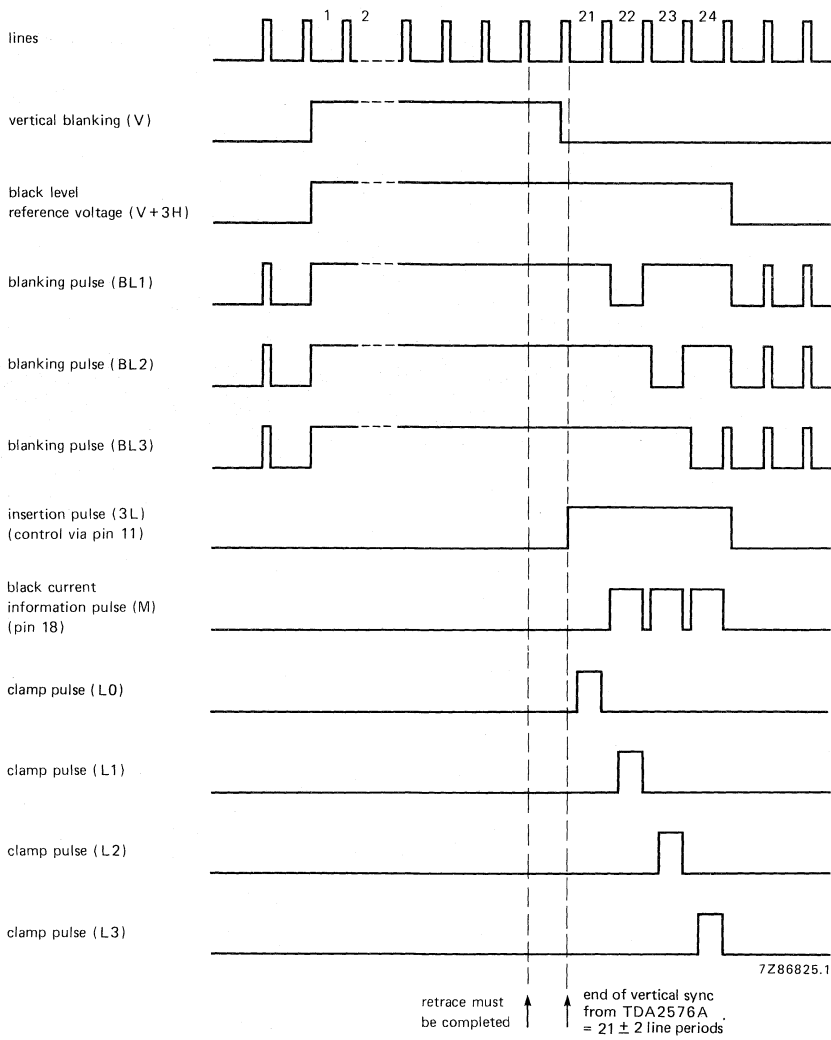


Fig. 6 Timing diagram for black-current stabilizing.

APPLICATION INFORMATION


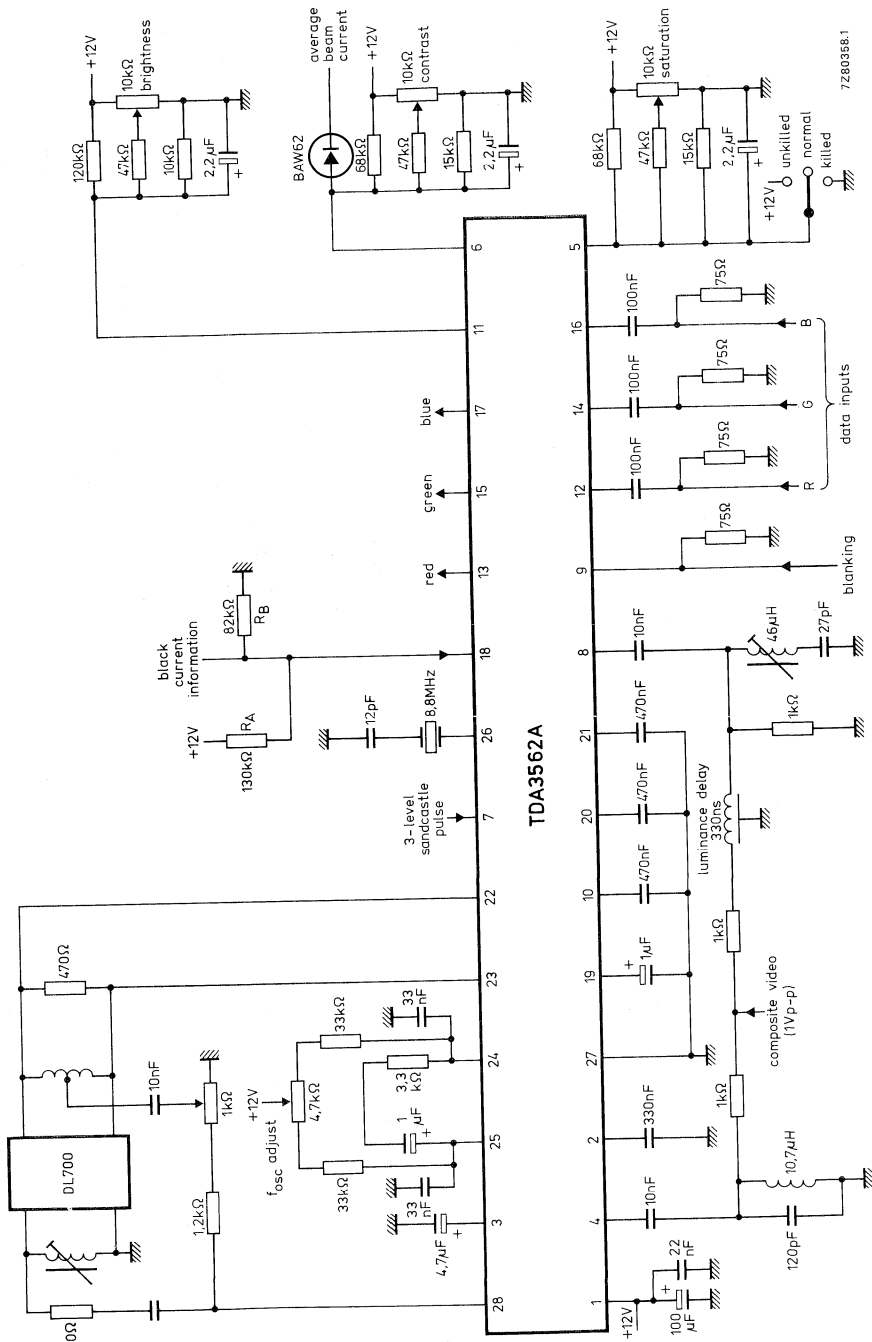


Fig. 7 Application diagram showing the TDA3562A for a PAL decoder.

DEVELOPMENT DATA

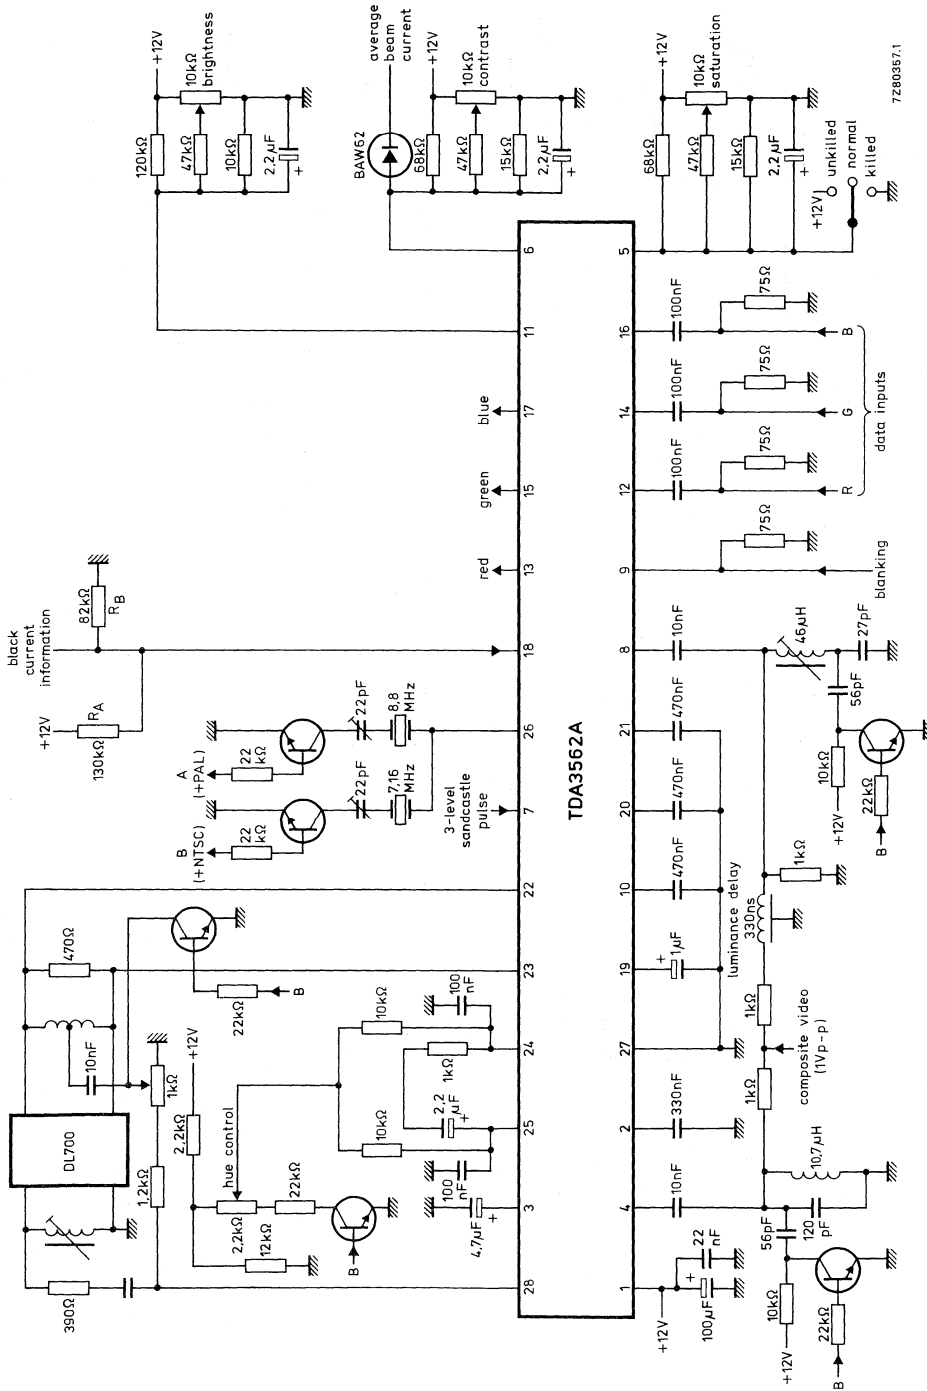

7260357.1

Fig. 8 Application diagram showing the TDA3562A for a PAL/NTSC decoder.

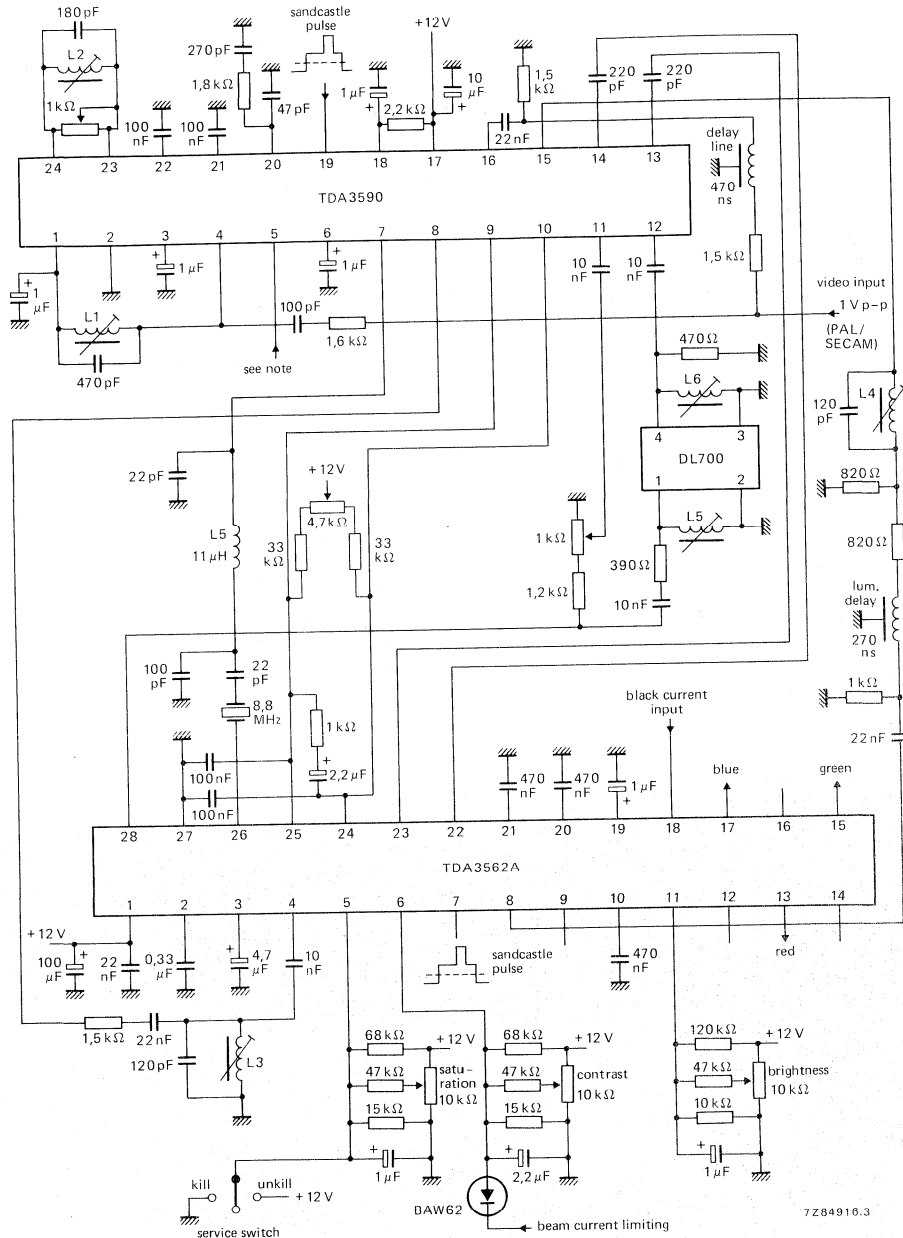


Fig. 9 PAL/SECAM application circuit diagram using the TDA3590 and TDA3562A.

Note to pin 5 TDA3590:

V<sub>5-2</sub> < 1 V; horizontal identification and black level clamping.

V<sub>5-2</sub> > 11 V; vertical identification and artificial black level.

V<sub>5-2</sub> = 5 to 7 V; horizontal identification and artificial black level.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3563

## NTSC DECODER

### GENERAL DESCRIPTION

The TDA3563 is a monolithic integrated colour decoder for the NTSC standard. It combines all functions required for the identification and demodulation of NTSC signals. Furthermore it contains a luminance amplifier, an RGB-matrix and amplifier. These amplifiers supply signals up to 5,3 V peak-to-peak (picture information) enabling direct drive of the output stages. The circuit also contains inputs for data insertion, analogue as well as digital, which can be used for Teletext information, channel number display, etc.

### QUICK REFERENCE DATA

---

Supply voltage (pin 1)	$V_P = V_{1-27}$	typ.	12 V
Supply current (pin 1)	$I_P = I_1$	typ.	85 mA
Luminance input signal (peak-to-peak value)	$V_{10-27(p-p)}$	typ.	0,45 V
Chrominance input signal (peak-to-peak value)	$V_{3-27(p-p)}$		55 to 1100 mV
Data input signals (peak-to-peak value)	$V_{13;15;17-27(p-p)}$	typ.	1 V
RGB output signals at nominal contrast and saturation (peak-to-peak value)	$V_{12;14;16-27(p-p)}$	typ.	5,3 V
Contrast control range		typ.	20 dB
Saturation control range		min.	50 dB
Input voltage for fast video-data signal switching	$V_{9-27}$	min.	0,9 V
Blanking input voltage	$V_{8-27}$	typ.	1,5 V
Burst gating and black-level gating input voltage	$V_{8-27}$	typ.	7 V

---

### PACKAGE OUTLINE

28-lead DIL; plastic, with internal heat spreader (SOT-117).

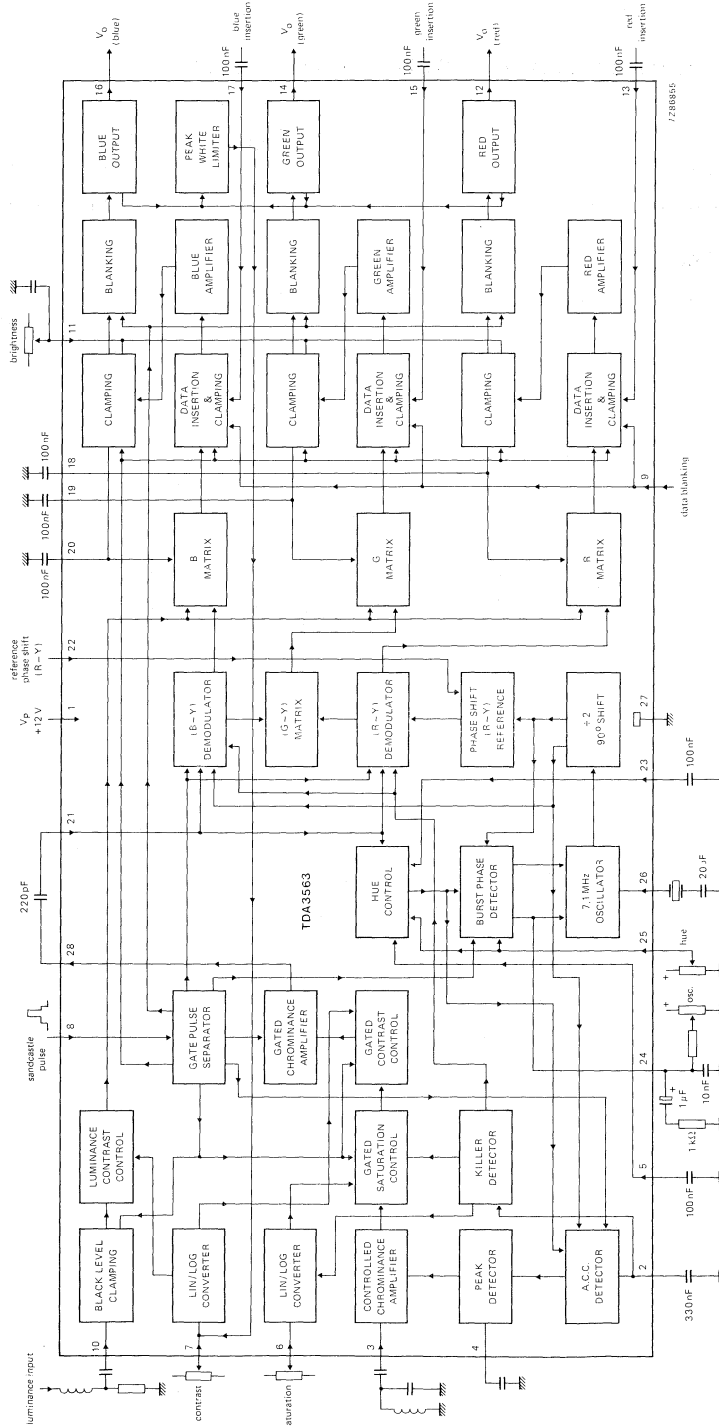


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_p = V_{1-27}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		-25 to +65 °C

**THERMAL RESISTANCE**

From junction to ambient (in free air)	$R_{th\ j-a}$	=	50 K/W
--	---------------	---	--------

DEVELOPMENT DATA

## CHARACTERISTICS

 $V_P = V_{1-27} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 1)</b>					
Supply voltage	$V_P = V_{1-27}$	10	12	13,2	V
Supply current	$I_P = I_1$	—	85	115	mA
Total power dissipation	$P_{\text{tot}}$	—	1	1,4	W
<b>Luminance amplifier</b>					
Input voltage (note 1) (peak-to-peak value)	$V_{10-27(p-p)}$	—	0,45	—	V
Contrast control range (see Fig. 2)		-17	—	+3	dB
Control voltage for an attenuation of 40 dB		—	1,2	—	V
Contrast control input current	$I_7$	—	—	15	$\mu\text{A}$
<b>Chrominance amplifier</b>					
Input voltage (note 2) (peak-to-peak value)	$V_{3-27(p-p)}$	55	550	1100	mV
A.C.C. control range		30	—	—	dB
Change of the burst signal at the output over the whole control range		—	—	1	dB
Output voltage (note 3) (peak-to-peak value) at a burst signal of 0,3 V peak to peak	$V_{28-27}$	—	0,15	—	V
Maximum output voltage range (peak-to-peak value); $R_L = 2 \text{ k}\Omega$	$V_{28-27}$	—	4	—	V
Frequency response between 0 and 5 MHz	$\alpha_{28-3}$	—	—	-2	dB
Saturation control range (see Fig. 3)		50	—	—	dB
Saturation control input current	$I_6$	—	—	20	$\mu\text{A}$
Output impedance of chrominance amplifier	$ Z_{28-27} $	—	25	—	$\Omega$
Output current	$I_{28}$	—	—	10	mA
<b>Reference part</b>					
<i>Phase-locked loop</i>					
Catching range (note 4)	$\Delta f$	500	700	—	Hz
Phase shift (notes 4 and 5)	$\Delta\varphi$	—	—	5	deg
<i>Oscillator</i>					
Temperature coefficient of oscillator frequency (note 4)	$TC_{\text{osc}}$	—	-1,5	—	Hz/K
Frequency variation when supply voltage increases from 10 V to 13,2 V (note 4)	$\Delta f_{\text{osc}}$	—	40	—	Hz

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Reference part (continued)</b>					
<i>Oscillator (continued)</i>					
Input resistance (pin 26)	$R_{26-27}$	—	400	—	$\Omega$
Input capacitance (pin 26)	$C_{26-27}$	—	—	10	pF
<i>A.C.C. generation (pin 2)</i>					
Control voltage at nominal input signal	$V_{2-27}$	—	5,0	—	V
Control voltage without chrominance input	$V_{2-27}$	—	2,7	—	V
Colour-off voltage	$V_{2-27}$	—	3,0	—	V
Colour-on voltage	$V_{2-27}$	—	3,3	—	V
<i>Hue control</i>					
Control range		$\pm 50$	—	—	deg
<b>Demodulator part</b>					
Input burst signal amplitude (peak-to-peak value)	$V_{21-27(p-p)}$	—	300	—	mV
Ratio for demodulated signals for equal input signal amplitudes (B-Y)/(R-Y)	$\frac{V_{16-27}}{V_{12-27}}$	—	$1,06 \pm 10\%$	—	
(G-Y)/(R-Y); no (B-Y) signal	$\frac{V_{14-27}}{V_{12-27}}$	—	$-0,27 \pm 20\%$	—	
(G-Y)/(B-Y); no (R-Y) signal	$\frac{V_{14-27}}{V_{16-27}}$	—	$-0,2 \pm 20\%$	—	
Frequency response between 0 and 1 MHz		—	—	-3	dB
<b>RGB matrix and amplifiers</b>					
Output voltage (note 3) (peak-to-peak value) at nominal luminance/contrast (black-to-white)	$V_{12;14;16-27}$	4,5	5,3	6,3	V
Maximum peak-white level (note 6)	$V_{12;14;16-27}$	9,0	9,3	9,6	V
Maximum output current	$I_{12;14;16}$	—	—	10	mA
Output black level voltage for brightness control of 2 V		—	2,7	—	V
Brightness control voltage range			see Fig. 4		
Brightness control input current	$I_{11}$	—	—	50	$\mu A$
Relative spread between R, G and B output signals		—	—	10	%
Blanking level at RGB outputs		1,9	2,1	2,3	V
Tracking of output black level with supply voltage	$\frac{\Delta V_{bl}}{V_{bl}} \times \frac{V_P}{\Delta V_P}$	—	1,1	—	

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>RGB matrix and amplifiers (continued)</b>					
Output impedance of RGB outputs	$ Z_{12;14;16-27} $	--	50	--	$\Omega$
Frequency response of total luminance and RGB amplifier circuits for $f = 0$ to 5 MHz		--	--	-3	dB
<b>Data insertion</b>					
Input signals (peak-to-peak value) for an RGB output voltage of 5 V (peak-to-peak)	$V_{13;15;17-27(p-p)}$	0,9	1	1,1	V
<b>Data blanking (pin 9)</b>					
Input voltage for no data insertion	$V_{9-27}$	--	--	0,3	V
Input voltage for data insertion	$V_{9-27}$	0,9	--	--	V
Maximum input voltage	$V_{9-27(m)}$	--	--	2	V
Delay of data blanking	$t_d$	--	--	20	ns
Input current	$I_g$	--	--	35	$\mu A$
<b>Sandcastle input (pin 8)</b>					
Level at which RGB blanking is activated	$V_{8-27}$	1	1,5	2	V
Level at which burst gating and clamping pulse are separated	$V_{8-27}$	6,5	7,0	7,5	V
Delay between black level clamping and burst gating pulse	$t_d$	--	0,4	--	$\mu s$
Input current					
at $V_{8-27} = 0$ to 1 V	$-I_g$	--	--	1	mA
at $V_{8-27} = 1$ to 8,5 V	$I_g$	--	20	--	$\mu A$
at $V_{8-27} = 8,5$ to 12 V	$I_g$	--	--	2	mA

## Notes to the characteristics

1. Signal with negative-going sync; amplitude includes sync amplitude.
2. Indicated is a signal for a colour bar with 75% saturation; chrominance to burst ratio is 2,2 : 1.
3. At nominal contrast and saturation. Nominal contrast is specified as the maximum contrast -3 dB and nominal saturation as the maximum saturation -6 dB.
4. All frequency variations are referred to 3,58 MHz carrier frequency.
5. For  $\pm 400$  Hz deviation of the oscillator frequency.
6. If the typical voltage for this white level is exceeded, the output voltage is reduced by discharging the capacitor at pin 7 (contrast control); discharge current is 1,5 mA.

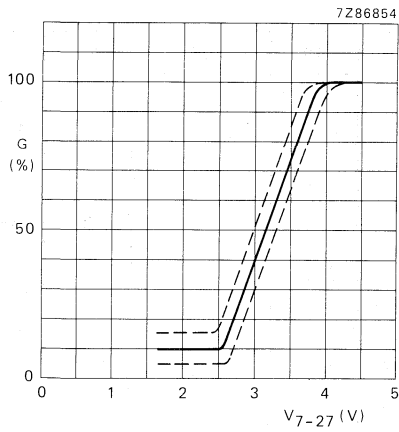


Fig. 2 Contrast control voltage range.

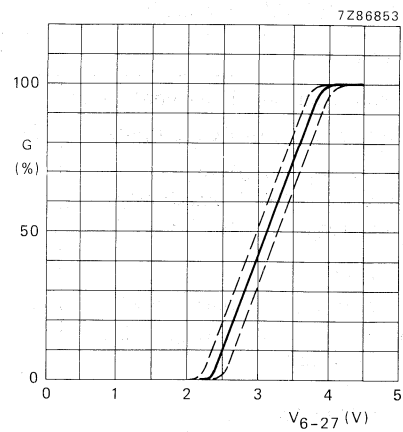


Fig. 3 Saturation control voltage range.

DEVELOPMENT DATA

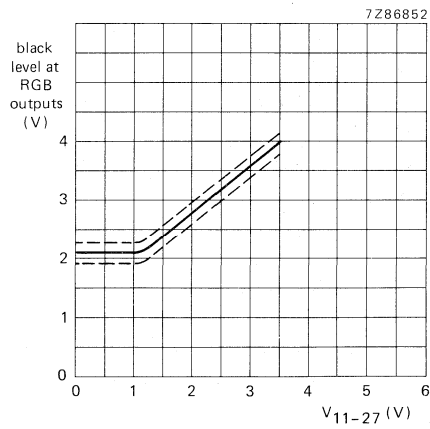


Fig. 4 Brightness control voltage range.

## APPLICATION INFORMATION

The function is described against the corresponding pin number.

### 1. + 12 V power supply

The circuit gives good operation in a supply voltage range between 8 and 13,2 V provided that the supply voltage for the controls is equal to the supply voltage of the TDA3563. All signal and control levels have a linear dependency on the supply voltage. The current consumed by the IC at + 12 V is typically 85 mA. It is linearly dependent on the supply voltage.

### 2. Control voltage for identification

The output pulses of the a.c.c. detector are detected with a sample-and-hold circuit to obtain information for the colour killer. The output is available at pin 2.

### 3. Chrominance input

The chrominance signal must be a.c.-coupled to the input. Its amplitude must be between 55 and 1100 mV peak-to-peak (25 to 500 mV peak-to-peak burst signal). All figures for the chrominance signals are based on a colour bar signal with 75% saturation, that is if the burst-to-chrominance ratio of the input is 1 : 2,2.

### 4. Control voltage a.c.c. detector

The shifted burst signal is synchronously demodulated in a separate a.c.c. detector to generate the a.c.c. voltage. The output pulses of this detector are peak detected to control the gain of the chrominance amplifier, thus preventing blooming-up of the colour during weak signal reception.

### 5. Decoupling of the 90° phase shift circuit

A control circuit is required in the 90° phase shift circuit to make the chrominance voltage independent of the hue setting. The control circuit is decoupled by a capacitor at this pin.

### 6. Saturation control

The saturation control range is in excess of 50 dB. The control voltage range is 2 to 4 V. Saturation control is a linear function of the control voltage.

When the colour killer is active, the saturation control voltage is reduced to a low level if the resistance of the external control network is sufficiently high. Then the chrominance amplifier supplies no signal to the demodulator. Colour switch-on can be delayed by proper choice of the time constant for the saturation control setting circuit.

When the saturation control pin is connected to the power supply the colour killer circuit is overruled so that the colour signal is visible on the screen. In this way it is possible to adjust the oscillator frequency without using a frequency counter (see also pins 24 and 26).

### 7. Contrast control

The contrast control range is 20 dB for a control voltage change from + 2 V to + 4 V. Contrast control is a linear function of the control voltage. The output signal is suppressed when the control voltage is 1 V or less. If one or more output signals surpasses the level of 9 V the peak-white limiter circuit becomes active and reduces the output signals via the contrast control by discharging a 10  $\mu$ F capacitor via an internal current sink.

### 8. Sandcastle and vertical blanking input

The output signals are blanked if the amplitude of the pulse is between 2 V and 6,5 V. The burst gate and clamping circuits are activated if the input pulse exceeds a level of 7,5 V. The higher part of the sandcastle pulse should start just after the sync pulse to prevent clamping of the video signal on the sync pulse. The duration should be about 4  $\mu$ s for proper a.c.c. operation.



### 9. Video-data switching

The insertion circuit is activated by means of this input by an input pulse between 1 and 2 V. In that condition, the internal RGB signals are switched off and the inserted signals are supplied to the output amplifiers. If only normal operation is wanted this pin should be connected to ground (pin 27).

The switching times are very short (< 20 ns) to avoid coloured edges of the inserted signals on the screen.

### 10. Luminance signal input

The input signal should have a peak-to-peak amplitude of 0,45 V (peak-white to sync) to obtain a black-white output signal of 5,3 V at nominal contrast. It must be a.c.-coupled to the input by a capacitor of about 22 nF. The signal is clamped at the input to an internal reference voltage. The 1 k $\Omega$  luminance delay line can be applied because the luminance impedance is very high. Consequently the charging and discharging currents of the coupling capacitor are very small and do not influence the signal level at the input noticeably. Additionally the coupling capacitor value may be small.

### 11. Brightness control

The black level of the RGB outputs can be set by the voltage on this pin (see Fig. 4). The minimum black level is identical to the blanking level. The black level can be set higher than 4 V, however, the available output signal amplitude is reduced (see also pin 7). Brightness control also operates on the black level of the inserted signals.

### 12, 14, 16. RGB outputs

The output circuits for red, green and blue are identical. Output signals are 5,3 V (black-white) for nominal input signals and control settings. The black levels of the three outputs have the same value. The blanking level at the outputs is 2,1 V. The peak-white level is limited to 9 V. When this level is exceeded the output signal amplitude is reduced via the contrast control (see also pin 7).

### 13, 15, 17. Inputs for external RGB signals

The external signals must be a.c.-coupled to the inputs via a coupling capacitor of about 100 nF. Source impedance should not exceed 150  $\Omega$ . The input signal required for a 5 V peak-to-peak output signal is 1 V peak to peak. At the RGB outputs the black level of the inserted signal is identical to that of normal RGB signals. When these inputs are not used the coupling capacitors have to be connected to ground (pin 27).

### 18, 19, 20. Black level clamp capacitors

The black level clamp capacitors for the three channels are connected to these pins. The value of each capacitor should be about 100 nF.

### 21, 22. Demodulator input and reference signal phase adjustment

The (R-Y) and (B-Y) demodulator inputs are internally connected (pin 21). The phase angle between the two reference carriers is 115°. At the nominal hue adjustment the (B-Y) signal is demodulated with a difference of 0°. The phase shift of 115° can be changing the voltage at pin 22. The gain at the two demodulators is identical. The (G-Y) is composed of  $-0,27(R-Y) - 0,22(B-Y)$ .

### 23, 25. Hue control

The hue control is obtained by changing the phase of the input signal of the burst phase detector with respect to the demodulator input signal. This phase shift is obtained by generating a 90° shifted sine-wave via a Miller integrator (biased via pin 23) which is mixed with the original burst signal.

**APPLICATION INFORMATION (continued)****24, 26. Reference oscillator**

As the burst phase detector has an asymmetrical output the oscillator can be adjusted by changing the voltage of the output (pin 24) via a high-ohmic resistor. The capacitor in series with the oscillator crystal must then have a fixed value. When pin 6 (saturation control) is connected to the positive supply line the burst phase detector is based in its nominal position and the colour killer is overruled. This position can therefore be used for the adjustment of the oscillator.

**27. Ground****28. Output of the chrominance amplifier**

The (R-Y) and (B-Y) demodulator input (pin 21) is a.c.-coupled to this output.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3564

## NTSC DECODER

### GENERAL DESCRIPTION

The TDA3564 is a monolithic integrated decoder for the NTSC colour television standards. It combines all functions required for the demodulation of NTSC signals. Furthermore it contains a luminance amplifier, an RGB-matrix and amplifier. These amplifiers supply output signals up to 5 V peak-to-peak (picture information) enabling direct drive of the discrete output stages.

### QUICK REFERENCE DATA

---

Supply voltage (pin 1)	$V_P = V_{1-23}$	typ.	12 V
Supply current (pin 1)	$I_P = I_1$	typ.	85 mA
<b>Luminance input signal (pin 9)</b>			
Input voltage (peak-to-peak value)	$V_{9-23(p-p)}$	typ.	450 mV
Contrast control range		typ.	-17 to +3 dB
<b>Chrominance amplifier (pin 3)</b>			
Input voltage range (peak-to-peak value)	$V_{3-23(p-p)}$		55 to 1100 mV
Saturation control range		min.	50 dB
<b>RGB matrix and amplifiers</b>			
Output voltage at nominal luminance input signal and nominal contrast (peak-to-peak value)	$V_{13, 14, 15-23(p-p)}$	typ.	5 V
<b>Sandcastle input (pin 8)</b>			
Blanking input voltage	$V_{8-23}$	typ.	1,5 V
Burst gating and clamping input voltage	$V_{8-23}$	typ.	7 V

---

### PACKAGE OUTLINE

24-lead DIL; plastic, with internal heat spreader (SOT-101A).

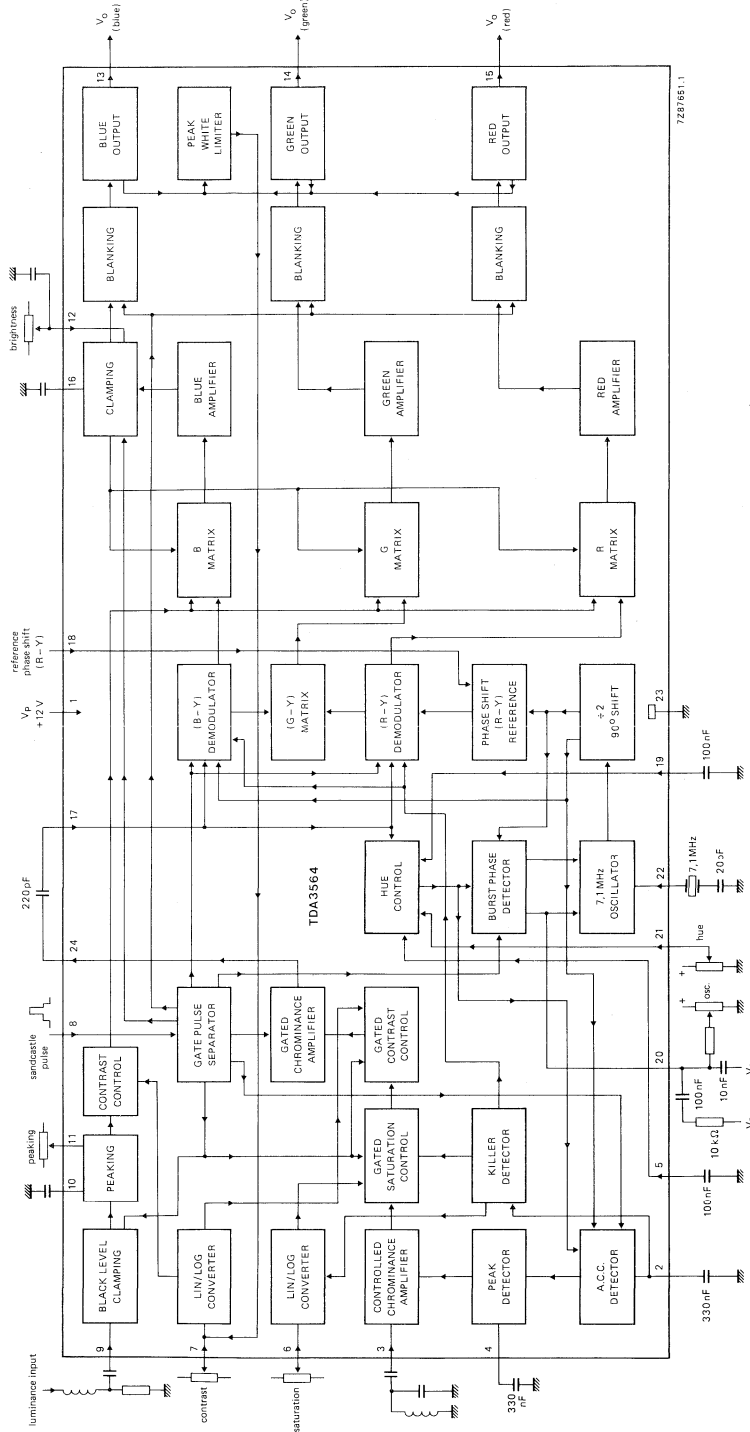


Fig. 1 Block diagram.

## FUNCTIONAL DESCRIPTION

### Luminance amplifier

The luminance amplifier is voltage driven and requires an input signal of 450 mV peak-to-peak (positive video). The luminance delay line must be connected between the i.f. amplifier and the decoder. The input signal is a.c. coupled to the input (pin 9).

The black level at the output of the preamplifier is clamped to a fixed d.c. level by the black level clamping circuit. The high input impedance of the luminance amplifier minimizes disturbance of the input signal black level by the source impedance (delay line matching resistors).

During clamping the low input impedance reduces noise and residual signals. After clamping the signal is fed to a peaking stage. The overshoot is defined by the capacitor connected to pin 10 and the peaking is adjusted by the control voltage at pin 11.

The peaking stage is followed by a contrast control stage. The contrast control voltage range (pin 7) is nominally  $-17$  to  $+3$  dB. The linear relationship between the contrast control voltage and the gain is shown in Fig. 2.

### Chrominance amplifier

The chrominance amplifier has an asymmetrical input. The input signal must be a.c. coupled (pin 3) and have a minimum amplitude of 55 mV peak-to-peak. The gain control stage has a control range in excess of 30 dB, the maximum input signal must not exceed 1,1 V peak-to-peak, otherwise clipping of the input signal will occur. From the gain control stage the chrominance signal is fed to the saturation and contrast control stages. Chrominance and luminance contrast control stages are directly coupled to obtain good tracking. Saturation is linearly controlled via pin 6 (see Fig. 3). The control voltage range is 2 V to 4 V, the input impedance is high and the saturation control range is in excess of 50 dB. The burst signal is not affected by saturation control. The output signal at pin 24 is a.c. coupled to the demodulators via pin 17.

### Oscillator and a.c.c. detector

The 7,16 MHz reference oscillator operates at twice the subcarrier frequency. The reference signals for the (R-Y) and (B-Y) demodulators, burst phase detector and a.c.c. detector are obtained via the divide-by-2 circuit, which provides a  $90^\circ$  phase shift. The oscillator is controlled by the burst phase detector, which is gated with the narrow part of the sandcastle pulse (pin 8). As the burst phase detector has an asymmetrical output the oscillator can be adjusted by changing the voltage of the output (pin 21) via a high-ohmic resistor. The capacitor in series with the oscillator crystal must then have a fixed value. When pin 6 (saturation control) is connected to the positive supply line the burst signal is suppressed and the colour killer is overruled. This position can therefore be used for adjustment of the oscillator. The adjustment is visible on the screen.

The hue control is obtained by changing the phase of the input signal of the burst phase detector with respect to the chrominance signal applied to the demodulators. This phase shift is obtained by generating a  $90^\circ$  shifted sine-wave via a Miller integrator (biased via pin 19) which is mixed with the original burst signal. A control circuit is required in the  $90^\circ$  phase shift circuit to make the chrominance voltage independent of the hue setting. This control circuit is decoupled by a capacitor connected to pin 5.

### Oscillator and a.c.c. detector

As the shifted burst signal is synchronously demodulated in a separate a.c.c. detector to generate the a.c.c. voltage, it is not affected by the hue control. The output pulses of this detector are peak detected (pin 4) to control the gain of the chrominance amplifier, thus preventing blooming-up of the colour during weak signal reception. This ensures reliable operation of the colour killer. During colour killing the colour channel is blocked by switching-off saturation control and the demodulators.

**FUNCTIONAL DESCRIPTION** (continued)**Demodulators**

The (R-Y) and (B-Y) demodulators are driven by the chrominance signal (pin 24) and the reference signals from the 7,16 MHz divider circuit. The phase angle between the two reference carriers is  $115^\circ$ . This is achieved by the (R-Y) demodulator receiving an additional phase shift by mixing the two signals from the divider circuit. The phase shift of  $115^\circ$  can be varied between  $90^\circ$  and  $140^\circ$  by changing the bias voltage at pin 18. The demodulator output signals are fed to R and B matrix circuits and to the (G-Y) matrix to provide the (G-Y) signal which is applied to the G matrix. The demodulator circuits are killed and blanked by by-passing the input signals.

**RGB matrix and amplifiers**

The three matrix and amplifier circuits are identical and only one circuit will be described. The luminance and the colour difference signals are added in the matrix circuit to obtain the colour signal. Output signals are  $5 V_{(p-p)}$  (black-white) for the following nominal input signals and control settings.

- Luminance  $450 mV_{(p-p)}$
- Chrominance  $550 mV_{(p-p)}$  (burst-to-chrominance ratio of the input 1: 2,2)
- Contrast  $-3 \text{ dB max.}$
- Saturation  $-6 \text{ dB max.}$

The maximum output voltage is approximately  $7 V_{(p-p)}$ .

The black level of the blue channel is compared with a variable external reference level (pin 12) which provides brightness control. The brightness control range is 1 V to 3,2 V (see Fig. 4). The control voltage is stored in a capacitor (connected to pin 16) and controls the black level at the output (pin 15) between 2 V and 4 V, via a change of the level of the luminance signal before matrixing.

**Note**

Black levels of up to approximately 6 V are possible, but amplitude of the output signal is reduced to  $3 V_{(p-p)}$ .

If the output signal surpasses the level of 9 V the peak-white limiter circuit becomes active and reduces the output signal via the contrast control.

**Blanking of RGB signals**

The RGB signals can be blanked via the sandcastle input (pin 8). A slicing level of 1,5 V is used for this blanking function, so that the wide part of the sandcastle pulse is separated from the remainder of the pulse. During blanking a level of + 2 V is available at the output.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_p = V_{1-23}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Storage temperature range	$T_{stg}$		$-25 \text{ to } + 150 \text{ }^\circ\text{C}$
Operating ambient temperature range	$T_{amb}$		$-25 \text{ to } + 65 \text{ }^\circ\text{C}$

**THERMAL RESISTANCE**

From junction to ambient (in free air)	$R_{th j-a}$	=	50 K/W
--	--------------	---	--------

## CHARACTERISTICS

 $V_P = V_{1-23} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 1)</b>					
Supply voltage	$V_P = V_{1-23}$	8	12	13,2	V
Supply current	$I_P = I_1$	—	85	—	mA
Total power dissipation	$P_{\text{tot}}$	—	1,0	—	W
<b>Luminance amplifier (pin 9)</b>					
Input voltage (note 1) (peak-to-peak value)	$V_{9-23(p-p)}$	—	450	—	mV
Input level before clipping	$V_{9-23}$	—	—	2	V
Input current	$I_9$	—	0,15	1	$\mu\text{A}$
Contrast control range (see Fig. 2)		-17	—	+3	dB
Control voltage for an attenuation of 40 dB		—	1,2	—	V
Input current contrast control	$I_7$	—	—	15	$\mu\text{A}$
<b>Peaking of luminance signal</b>					
Output impedance (pin 10)	$ Z_{10-23} $	—	200	—	$\Omega$
Ratio of internal/external current when pin 10 is short-circuited		—	3	—	
Control voltage for peaking adjustment (pin 11)	$V_{11-23}$	—	2,4	—	V
Input impedance (pin 11)	$ Z_{11-23} $	—	10	—	$\text{k}\Omega$
<b>Chrominance amplifier (pin 3)</b>					
Input voltage (note 2) (peak-to-peak value)	$V_{3-23(p-p)}$	55	550	1100	mV
Input impedance	$ Z_{3-23} $	—	8	—	$\text{k}\Omega$
Input capacitance	$C_{3-23}$	—	4	6	pF
A.C.C. control range		30	—	—	dB
Change of the burst signal at the output over the whole control range		—	—	1	dB
Gain at nominal contrast/saturation pin 3 to pin 24 (note 3)		13	—	—	dB
Output voltage (note 3) (peak-to-peak value) at a burst signal of 300 mV(p-p)	$V_{24-23(p-p)}$	—	240	—	mV
Maximum output voltage range (pin 24) (peak-to-peak value)	$V_{24-23(p-p)}$	—	1,7	—	V
Distortion of chrominance amplifier at $V_{24-23(p-p)} = 0,5 \text{ V}$ (output) up to $V_{3-23(p-p)} = 1 \text{ V}$ (input)	d	—	3,0	5	%

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Chrominance amplifier (continued)</b>					
Frequency response between 0 and 5 MHz	$\alpha_{24-3}$	—	—	—2	dB
Saturation control range (see Fig. 3)		50	—	—	dB
Input current saturation control (pin 6)	$I_6$	—	—	20	$\mu\text{A}$
Tracking between luminance and chrominance contrast control		—	—	2	dB
Cross-coupling between luminance and chrominance amplifier (note 4)		—	—	—46	dB
Signal-to-noise ratio at nominal input signal (note 5)	S/N	56	—	—	dB
Phase shift between burst and chrominance at nominal contrast/saturation	$\Delta\phi$	—	—	$\pm 5$	deg
Output impedance of chrominance amplifier	$ Z_{24-23} $	—	25	—	$\Omega$
Output current	$I_{24}$	—	—	10	mA
<b>Reference part</b>					
<i>Phase-locked loop</i>					
Catching range (note 6)	$\Delta f$	500	700	—	Hz
Phase shift for $\pm 400$ Hz deviation of $f_{\text{osc}}$ (note 6)	$\Delta\phi$	—	—	5	deg
<i>Oscillator</i>					
Temperature coefficient of oscillator frequency (note 6)	$TC_{\text{osc}}$	—	—1,5	—	Hz/K
Frequency variation when supply voltage increases from 10 to 13,2 V (note 6)	$\Delta f_{\text{osc}}$	—	40	—	Hz
Input resistance (pin 22)	$R_{22-23}$	—	300	—	$\Omega$
Input capacitance (pin 22)	$C_{22-23}$	—	—	10	pF
<i>A.C.C. generation (pin 2)</i>					
Control voltage at nominal input signal	$V_{2-23}$	—	5,3	—	V
Control voltage without chrominance input	$V_{2-23}$	—	2,8	—	V
Colour-off voltage	$V_{2-23}$	—	3,4	—	V
Colour-on voltage	$V_{2-23}$	—	3,6	—	V
Change in burst amplitude with supply voltage			independent		
Voltage at pin 4 at nominal input signal	$V_{4-23}$	—	5,2	—	V
<i>Hue control</i>					
Control range		$\pm 50$	—	—	deg
Control voltage range		see Fig. 5			V



parameter	symbol	min.	typ.	max.	unit
<b>Demodulator part</b>					
Input burst signal amplitude (pin 17) (peak-to-peak value)	$V_{17-23(p-p)}$	—	320	—	mV
Input impedance (pin 17; note 7)	$ Z_{17-23} $	—	2	—	k $\Omega$
Ratio of demodulated signals (B-Y)/(R-Y)	$\frac{V_{15-23}}{V_{13-23}}$	—	1,1	—	
(G-Y)/(R-Y); no (B-Y) signal	$\frac{V_{14-23}}{V_{13-23}}$	—	0,26	—	
(G-Y)/(B-Y); no (R-Y) signal	$\frac{V_{14-23}}{V_{15-23}}$	—	0,22	—	
Frequency response between 0 and 1 MHz		—	—	-3	dB
Cross-talk between colour difference signals		40	—	—	dB
Control range reference signal (R-Y) demodulator (pin 18; note 8)	$\phi$		see Fig. 6		deg
<b>RGB matrix and amplifiers</b>					
Output voltage (peak-to-peak value) at nominal input signal (black-to-white) (note 3)	$V_{13,14,15-23(p-p)}$	—	5	—	V
Output voltage at pin 13 (peak-to-peak value) at nominal contrast/saturation and no luminance signal to (R-Y)	$V_{13-23(p-p)}$	—	5,25	—	V
Maximum peak-white level (note 9)	$V_{13,14,15-23}$	9,0	9,3	9,6	V
Maximum output current (pins 13, 14, 15)	$I_{13,14,15}$	—	—	10	mA
Output black level voltage for a brightness control voltage at pin 12 of 2 V	$V_{13,14,15-23}$	—	2,7	—	V
Black level shift with vision contents		—	—	40	mV
Brightness control voltage range			see Fig. 4		V
Brightness control input current	$I_{12}$	—	—	5	$\mu$ A
Variation of black level with temperature	$\Delta V/\Delta T$	—	0,35	1,0	mV/K
with contrast	$\Delta V$	—	10	100	mV
Relative spread between the R, G and B output signals		—	—	10	%
Relative black-level variation between the three channels during variation of contrast, brightness and supply voltage		—	0	20	mV
Differential black-level drift over a temperature range of 40 °C		—	0	20	mV
Blanking level at the RGB outputs		1,9	2,1	2,3	V
Difference in blanking level of the three channels		—	0	—	mV

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>RGB matrix and amplifiers (continued)</b>					
Differential drift of the blanking levels over a temperature range of 40 °C		—	0	—	mA
Tracking of output black level with supply voltage	$\frac{\Delta V_{b1}}{V_{b1}} \times \frac{V_P}{\Delta V_P}$	—	1,1	—	
Signal-to-noise ratio of output signals (note 5)	S/N	62	—	—	dB
Residual 7,1 MHz signal and higher harmonics at the RGB outputs (peak-to-peak value)		—	75	150	mV
Output impedance of RGB outputs	$ Z_{13,14,15-23} $	—	50	—	$\Omega$
Frequency response of total luminance and RGB amplifier circuits for $f = 0$ to 5 MHz		—	—	-3	dB
<b>Sandcastle input (pin 8)</b>					
Level at which the RGB blanking is activated	$V_{8-23}$	1	1,5	2	V
Level at which burst gating and clamping pulse are separated	$V_{8-23}$	6,5	7,0	7,5	V
Delay between black level clamping and burst gating pulse	$t_d$	—	0,4	—	$\mu s$
Input current					
at $V_{8-23} = 0$ to 1 V	$-I_g$	—	—	1	mA
at $V_{8-23} = 1$ to 8,5 V	$I_g$	—	20	—	$\mu A$
at $V_{8-23} = 8,5$ to 12 V	$I_g$	—	—	2	mA

## Notes to the characteristics

- Signal with the negative-going sync; amplitude includes sync amplitude.
- Indicated is a signal for a colour bar with 75% saturation; chrominance to burst ratio is 2,2 : 1.
- Nominal contrast is specified as the maximum contrast -3 dB and nominal saturation as the maximum saturation -6 dB.
- Cross coupling is measured under the following conditions:
  - Input signals nominal
  - Contrast and saturation such that nominal output signals are obtained
  - The signals at the output at which no signal should be available must be compared with the nominal output signal at that output.
- The signal-to-noise ratio is defined as peak-to-peak signal with respect to r.m.s. noise.
- All frequency variations are referred to 3,58 MHz carrier frequency.
- These signal amplitudes are determined by the a.c.c. circuit of the reference part.
- When pin 18 is open circuit the phase shift between the (R-Y) and (B-Y) reference carrier is 115°. This phase shift can be varied by changing the voltage applied to pin 18.
- If the typical voltage for this white level is exceeded, the output voltage is reduced by discharging the capacitor at pin 7 (contrast control); discharge current is 1,5 mA.

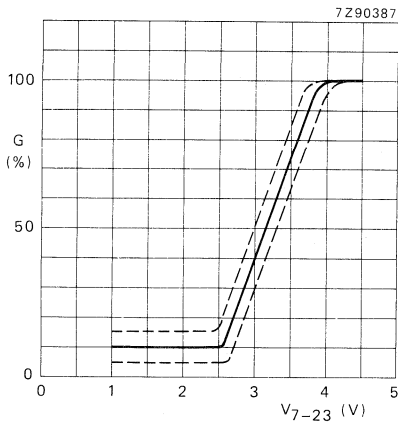


Fig. 2 Contrast control voltage range.

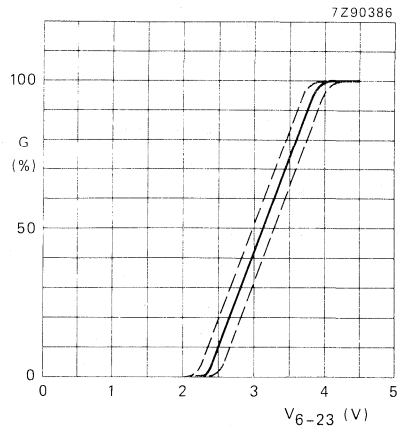


Fig. 3 Saturation control voltage range.

DEVELOPMENT DATA

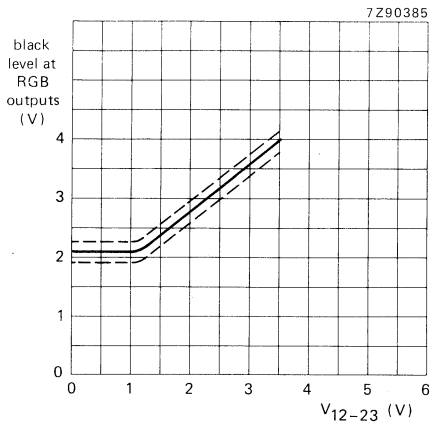


Fig. 4 Brightness control voltage range.

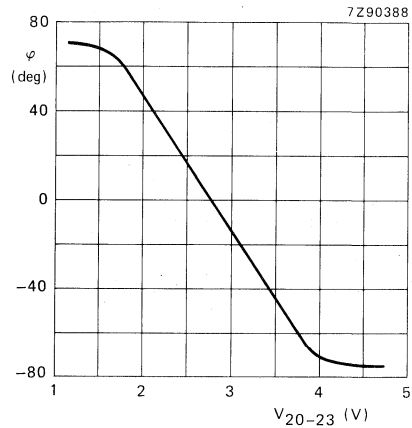


Fig. 5 Hue control voltage range.

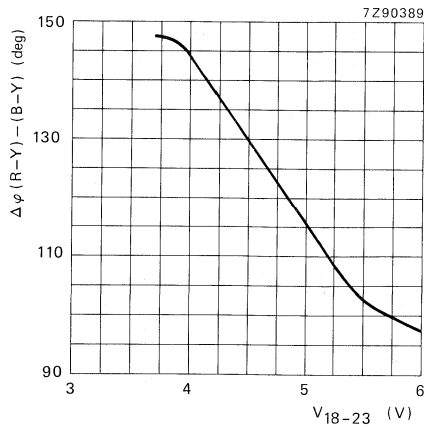


Fig. 6 Phase shift between (R-Y) and (B-Y) as a function of  $V_{18-23}$ .



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3565

## PAL DECODER

### GENERAL DESCRIPTION

The TDA3565 PAL decoder contains all the functions required for PAL signal decoding and colour matrixing and is contained within an 18-pin package. The oscillator, a.c.c. detector and burst phase detector each have single-pin outputs and the coupling capacitor for the luminance input at pin 8 doubles as a storage capacitor for the black level clamping circuit. Black level clamping of the three colour channels is performed using feedback proportional to the red channel black level. This feedback (variable with the brightness control) controls the input level of the luminance amplifier and therefore the clamping levels of all three colour signal outputs.

### QUICK REFERENCE DATA

Supply voltage	$V_p = V_{1-17}$	typ.	12 V
Supply current	$I_p = I_1$	typ.	85 mA
Luminance input signal (peak-to-peak value)	$V_{8-17(p-p)}$	typ.	0,45 V
Chrominance input signal (peak-to-peak value)	$V_{3-17(p-p)}$	typ.	550 mV
RGB output signal amplitudes (peak-to-peak value) at nominal luminance and contrast	$V_{10,11,12-17(p-p)}$	typ.	5 V
Contrast control range			-17 to +3 dB
Saturation control range		>	50 dB
A.C.C. control range		>	30 dB
Level at which RGB blanking is activated	$V_{7-17}$	typ.	1,5 V
Level at which burst gate/clamping pulse are separated	$V_{7-17}$	typ.	7 V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

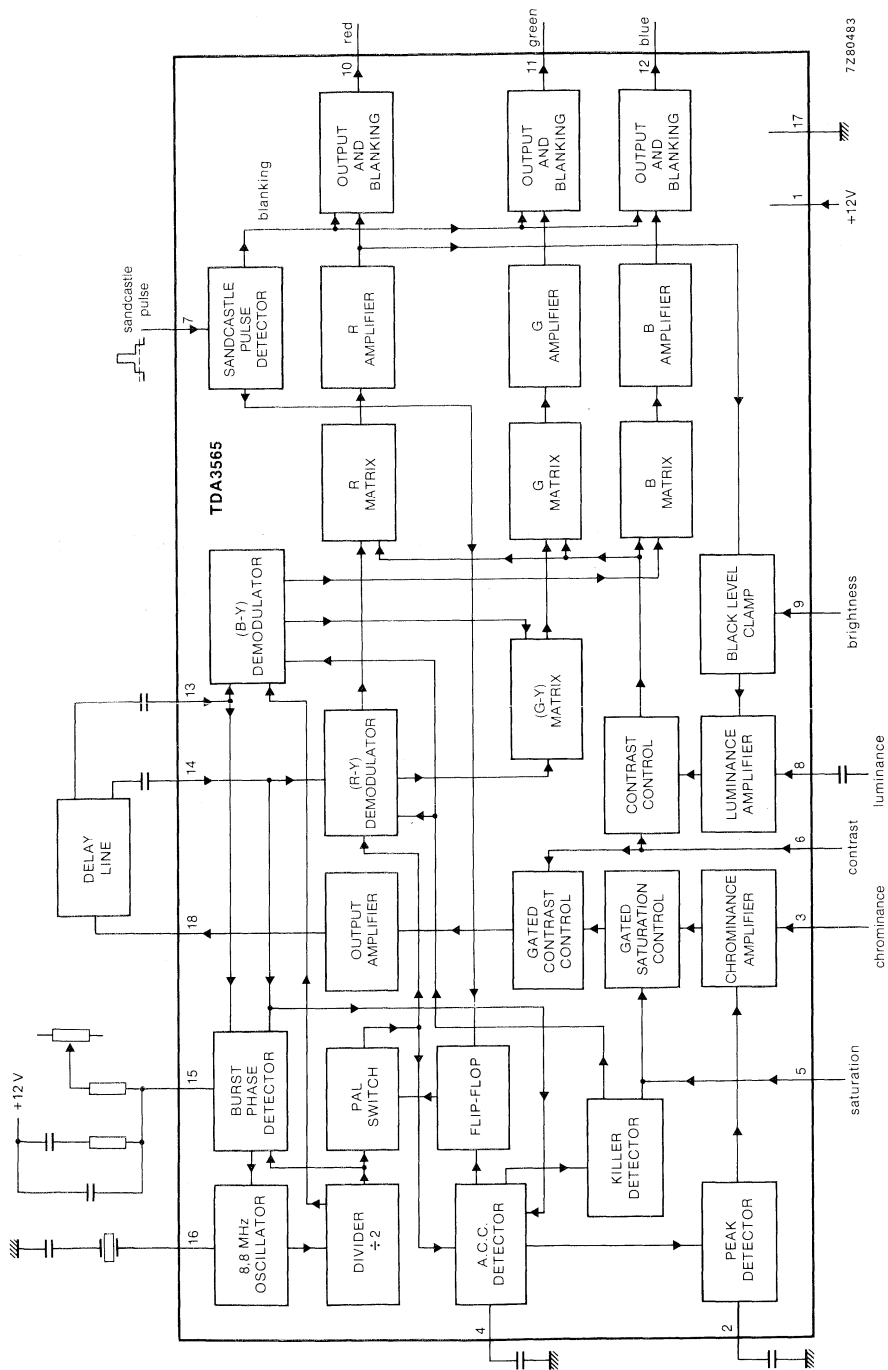


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_P = V_{1-17}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Operating ambient temperature range	$T_{amb}$		-25 to +65 °C
Storage temperature range	$T_{stg}$		-25 to +150 °C

**THERMAL RESISTANCE**

From junction to ambient (in free air)	$R_{th j-a}$	max.	50 K/W
--	--------------	------	--------

**CHARACTERISTICS** $V_P = V_{1-17} = 12 V$ ;  $T_{amb} = 25 °C$  unless otherwise specified

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 1)</b>					
Supply voltage	$V_{1-17}$	9,0	12,0	13,2	V
Supply current	$I_1$	—	85	—	mA
Total power dissipation	$P_{tot}$	—	1,0	—	W
<b>Luminance amplifier</b>					
Input signal amplitude (note 1) (peak-to-peak value)	$V_{8-17(p-p)}$	—	0,45	—	V
Input level before clipping occurs *	$V_{8-17(p-p)}$	—	—	0,7	V
Input current at $V_{8-17} = 2 V$ ; clamp not active	$I_8$	—	0,15	1,0	$\mu A$
Contrast control range (Fig. 2)		—	-17 to +3	—	dB
Input current when peak white limiter is active ( $V_{6-17} = 2,5 V$ )	$I_8$	—	5,5	—	mA
Input resistance $V_{6-17} > 6 V$	$R_i$	1,4	2,0	2,6	k $\Omega$
<b>Chrominance amplifier</b>					
Input signal amplitude (note 2)	$V_{3-17(p-p)}$	55	550	1100	mV
Minimum burst signal amplitude within the control range (peak-peak)		30	—	—	mV
Input impedance	$Z_{3-17}$	—	8,0	—	k $\Omega$
Input capacitance	$C_{3-17}$	—	4,0	6,0	pF
A.C.C. control range		30	—	—	dB
Change of burst signal at output over whole a.c.c. control range		—	—	1	dB
Amplification pin 3 to pin 18 at nominal contrast/saturation (note 3)		32	—	—	dB

\* At nominal contrast and nominal brightness.

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Chrominance amplifier (continued)</b>					
Chroma to burst ratio (note 3)		—	3,8	—	dB
Max. output voltage range (pin 18) $R_L = 2 \text{ k}\Omega$		4,0	4,5	—	V
Chrominance amplifier distortion at $V_{8.17(p-p)} = 2 \text{ V}$ (output) up to $V_{3.17(p-p)} = 1 \text{ V}$ (input)	d <sub>8.3</sub>	—	3,0	5,0	%
Frequency response between 0 and 5 MHz		—	—	-2	dB
Saturation control range (Fig. 3)		50	—	—	dB
Saturation control input current at $V_{5.17} < 6 \text{ V}$	$I_5$	—	1	20	$\mu\text{A}$
Input impedance for $V_5$ between 6 and 10 V	$Z_i$	1,4	2,0	2,6	$\text{k}\Omega$
Input impedance when colour killer is active	$Z_i$	1,4	2,0	2,6	$\text{k}\Omega$
Input impedance for $V_5 > 10 \text{ V}$ (adjustment procedure)	$Z_i$	0,7	1,0	1,3	$\text{k}\Omega$
Tracking between luminance and chrominance over 10 dB of contrast control range		—	—	2	dB
Cross coupling between luminance and chrominance amplifiers (note 4)		—	—	-46	dB
Signal-to-noise ratio at nominal input signal (note 5)	S/N	56	—	—	dB
Burst phase shift with respect to chrominance at nominal contrast/saturation (note 3)	$\Delta\varphi$	—	—	$\pm 5$	deg
Chrominance amplifier output impedance	$Z_{18.17}$	—	25	—	$\Omega$
Output current (pin 18)	$I_{18}$	—	—	10	mA
<b>Reference part</b>					
Phase-locked loop					
Catching range	$\Delta f$	500	700	—	Hz
Phase shift for $\pm 400 \text{ Hz}$ deviation of oscillator frequency	$\Delta\varphi$	—	—	5	deg
Oscillator					
Temperature coefficient of oscillator frequency	$TC_{osc}$	—	2	3	Hz/K
Frequency deviation when supply voltage changes from 10 to 13,2 V	$\Delta f_{osc}$	—	200	300	Hz



DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
Input resistance	R16-17	250	290	330	$\Omega$
Input capacitance	C16-17	—	—	10	pF
A.C.C. generation					
Voltage with nominal input signal	V4-17	—	5,0	—	V
Voltage without chrominance input	V4-17	—	2,5	—	V
Colour-off voltage	V4-17	—	3,2	—	V
Colour-on voltage	V4-17	—	3,5	—	V
Identification-on voltage	V4-17	—	2,5	—	V
Pin 2 voltage at nominal input signal	V2-17	—	5,1	—	V
<b>Demodulator part</b>					
Burst signal amplitude (peak-to-peak value) at pins 13 and 14 (note 6)	V13-17(p-p) V14-17(p-p)	—	80	—	mV
Input impedance of pins 13 or 14 to pin 17	Z13, 14-17	—	1,0	—	k $\Omega$
Ratios of demodulated signals with equal signal inputs to pins 13 and 14 and no luminance input signal:					
(B-Y)/(R-Y)	$\frac{V_{12-17}}{V_{10-17}}$	—	1,78 $\pm$ 10%	—	
(G-Y)/(R-Y) (no (B-Y) signal)	$\frac{V_{11-17}}{V_{10-17}}$	—	-0,51 $\pm$ 10%	—	
(G-Y)/(B-Y) (no (R-Y) signal)	$\frac{V_{11-17}}{V_{12-17}}$	—	-0,19 $\pm$ 10%	—	
Frequency response between 0 and 1 MHz		—	—	-3	dB
Separation of colour difference channels		40	—	—	dB
Phase difference between (R-Y) signal and (R-Y) reference signal	$\Delta\varphi$	—	—	5	deg
Phase difference between (R-Y) and (B-Y) reference signals	$\Delta\varphi$	85	90	95	deg
<b>RGB matrix and amplifiers</b>					
Output signal amplitudes (peak-to-peak value) at nominal luminance signal and contrast inputs (black-white) (note 3)	V10-17(p-p) V11-17(p-p) V12-17(p-p)	4,5	5,0	5,5	V
Red channel output amplitude (peak-to- peak value) at nominal contrast/satura- tion (note 3) and no luminance signal to (R-Y)	V10-17(p-p)	3,7	5,25	7,4	V

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
Maximum peak white level (note 7)		9,0	9,3	9,6	V
Maximum output current	I <sub>10,11,12</sub>	—	—	15	mA
Red channel black level output when brightness control V <sub>9.17</sub> = 2 V	V <sub>10-17</sub>	—	2,7	—	V
Difference between black levels in R, G and B outputs		—	—	600	mV
Black level shift with picture content		—	—	40	mV
Brightness control voltage range	V <sub>9.17</sub>	see Fig. 3			
Brightness control input current at V <sub>9.17</sub> = 2 V	I <sub>9</sub>	—	—	−50	μA
Variation of black level with temperature		—	+0,35	1,0	mV/K
Variation of black level with contrast control		—	10	100	mV
Relative spread between the three channel outputs		—	—	10	%
Relative variation in black level between the three channels during normal variations of contrast and supply voltage		—	0	20	mV
Differential drift of black level over a temperature range of 40 °C		—	0	20	mV
Blanking level at the three channel outputs		1,9	2,1	2,3	V
Difference in blanking level of the three channel outputs		—	0	—	mV
Differential drift of blanking levels over a temperature range of 40 °C		—	0	—	mV
Tracking of output black levels with variation of supply voltage	$\frac{\Delta V_{bl}}{V_{bl}} \times \frac{V_P}{\Delta V_P}$	—	1,1	—	
Signal-to-noise ratio of output signals (note 5)	S/N	62	—	—	dB
Residual 4,4 MHz component in output signals (peak-to-peak value)		—	25	50	mV
Residual 8,8 MHz and higher harmonic components in output signals (peak-to-peak value)		—	25	50	mV
Output impedance	Z <sub>10,11,12-17</sub>	—	50	—	Ω
Frequency response of total luminance/RGB amplifier circuits for 0 to 5 MHz		—	—	−3	dB

parameter	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse detector</b>					
Level at which RGB blanking is activated	V7-17	1,0	1,5	2,0	V
Level at which burst gate and clamping pulse are separated	V7-17	6,5	7,0	7,5	V
Delay between black level clamping and burst gating pulse		—	0,4	—	$\mu$ s
Input current at:					
V7-17 = 0 to 1 V	I7	—	—	-1	mA
V7-17 = 1 to 8,5 V	I7	—	20	40	$\mu$ A
V7-17 = 8,5 to 12 V	I7	—	—	2	mA

**Notes to the characteristics**

1. Signal with negative-going sync pulse, amplitude includes sync pulse amplitude.
2. The signal indicated is for a colour bar with 75% saturation, so the chroma burst ratio of 2,2 : 1.
3. Nominal contrast is defined as (maximum contrast -3 dB) and nominal saturation is (maximum saturation -6 dB).
4. Cross coupling is measured under the following condition; input signals nominal and contrast/saturation such that nominal output signals are obtained. The signals at the output at which no signal should be available must be compared with the nominal signal at that output.
5. The signal-to-noise ratio is specified as peak-to-peak signal with respect to r.m.s. noise.
6. These signal amplitudes are determined by the a.c.c. circuit of the reference part.
7. When this level is exceeded the amplitude of the output signal is reduced via a discharge of the capacitor at pin 6 (contrast control). The discharge current is 5,5 mA.

DEVELOPMENT DATA

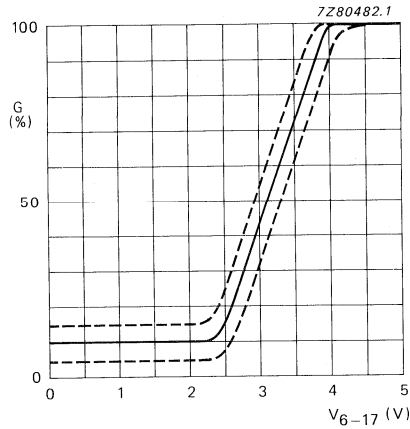


Fig. 2 Luminance contrast control voltage range.

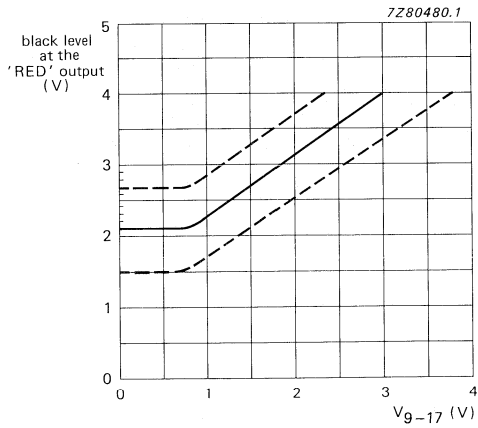


Fig. 3 Brightness control voltage range.

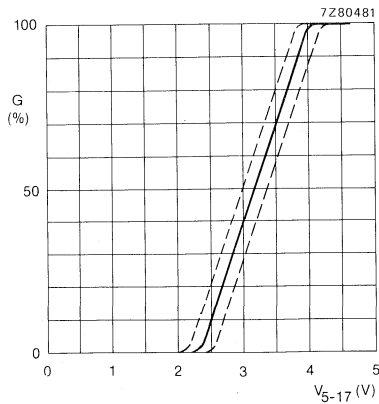


Fig. 4 Saturation control voltage range.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3566

## PAL/NTSC DECODER

### GENERAL DESCRIPTION

The TDA3566 is a monolithic integrated decoder for the PAL and/or NTSC colour television standards. It combines all functions required for the identification and demodulation of PAL/NTSC signals. Furthermore it contains a luminance amplifier, an RGB-matrix and amplifier. These amplifiers supply output signals up to 4 V peak-to-peak (picture information) enabling direct drive of the discrete output stages. The circuit also contains separate inputs for data insertion, analogue as well as digital, which can be used for text display systems (e.g. Teletext/broadcast antiope), channel number display, etc.

### Features

- A black-current stabilizer which controls the black-currents of the three electron-guns to a level low enough to omit the black-level adjustment
- Contrast control of inserted RGB signals
- No black-level disturbance when non-synchronized external RGB signals are available on the inputs
- NTSC capability with hue control

### QUICK REFERENCE DATA

Supply voltage (pin 1)	$V_p = V_{1-27}$	typ.	12 V
Supply current (pin 1)	$I_p = I_1$	typ.	80 mA
<b>Luminance amplifier (pin 8)</b>			
Input voltage (peak-to-peak value)	$V_{8-27(p-p)}$	typ.	450 mV
Contrast control range		typ.	20 dB
<b>Chrominance amplifier (pin 4)</b>			
Input voltage range (peak-to-peak value)	$V_{4-27(p-p)}$	40 to	1100 mV
Saturation control range		min.	50 dB
<b>RGB matrix and amplifiers</b>			
Output voltage at nominal luminance and contrast (peak-to-peak value)	$V_{13, 15, 17-27(p-p)}$	typ.	4 V
<b>Data insertion</b>			
Input signals (peak-to-peak value)	$V_{12, 14, 16-27(p-p)}$	typ.	1 V
<b>Data blanking (pin 9)</b>			
Input voltage for data insertion	$V_{9-27}$	min.	0,9 V
<b>Sandcastle input (pin 7)</b>			
Blanking input voltage	$V_{7-27}$	typ.	1,5 V
Burst gating and clamping input voltage	$V_{7-27}$	typ.	7 V

### PACKAGE OUTLINE

28-lead DIL; plastic, with internal heat spreader (SOT-117).

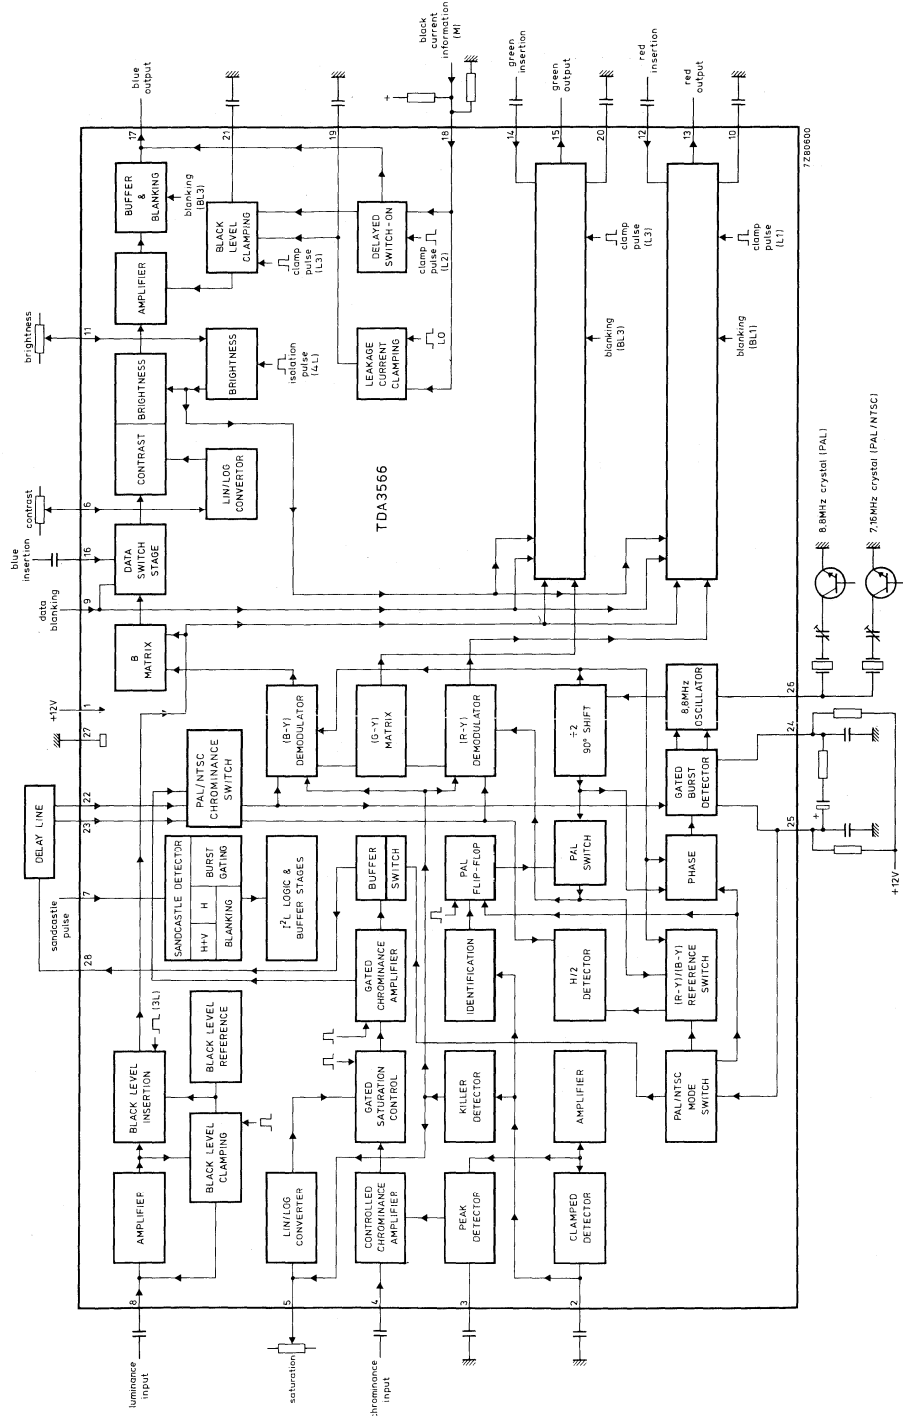


Fig. 1 Block diagram; for explanation of pulse mnemonics see Fig. 6.

## FUNCTIONAL DESCRIPTION

The TDA3566 is a further development of the TDA3562A. It has the same pinning and almost the same application. The differences between the TDA3562A and the TDA3566 are as follows:

- The NTSC-application has largely been simplified. In the case of NTSC the chroma signal is now internally coupled to the demodulators, ACC and phase detectors. The chroma output signal (pin 28) is suppressed in this case. It follows that the external switches and filters which are needed for the TDA3562A are not needed for the TDA3566.
- Furthermore there is no difference between the amplitude of the colour output signals in the PAL or NTSC mode. The PAL/NTSC-switch and the hue control of the TDA3566 and the TDA3562A are identical.
- The switch-on and the switch-off behaviour of the TDA3566 has been improved. This has been obtained by suppressing the output signals during the switch-on and switch-off periods.
- The clamp capacitors connected to the pins 10, 20 and 21 can be reduced to 100 nF for the TDA3566. The clamp capacitors also receive a pre-bias voltage to avoid coloured background during switch-on.
- The crystal oscillator circuit has been changed to prevent parasitic oscillations on the third overtone of the crystal. This has the consequence that optimal tuning capacitance must be reduced to 10 pF.

### Luminance amplifier

The luminance amplifier is voltage driven and requires an input signal of 450 mV peak-to-peak (positive video). The luminance delay line must be connected between the i.f. amplifier and the decoder. The input signal is a.c. coupled to the input (pin 8). After amplification, the black level at the output of the preamplifier is clamped to a fixed d.c. level by the black level clamping circuit. During three line periods after vertical blanking, the luminance signal is blanked out and the black level reference voltage is inserted by a switching circuit. This black level reference voltage is controlled via pin 11 (brightness). At the same time the RGB signals are clamped. Noise and residual signals have no influence during clamping thus simple internal clamping circuitry is used.

### Chrominance amplifiers

The chrominance amplifier has an asymmetrical input. The input signal must be a.c. coupled (pin 4) and have a minimum amplitude of 40 mV peak-to-peak. The gain control stage has a control range in excess of 30 dB, the maximum input signal must not exceed 1,1 V peak-to-peak, otherwise clipping of the input signal will occur. Form the gain control stage the chrominance signal is fed to the saturation control stage. Saturation is linear controlled via pin 5. The control voltage range is 2 to 4 V, the input impedance is high and the saturation control range is in excess of 50 dB. The burst signal is not affected by saturation control. The signal is then fed to a gated amplifier which has a 12 dB higher gain during the chrominance signal. As a result the signal at the output (pin 28) has a burst to chrominance ratio which is 6 dB lower than that of the input signal when the saturation control is set at –6 dB. The chrominance output signal is fed to the delay line and, after matrixing, is applied to the demodulator input pins (pins 22 and 23). These signals are fed to the burst phase detector. In the case of NTSC the chroma signal is internally coupled to the demodulators, ACC and phase detector.

**FUNCTIONAL DESCRIPTION** (continued)**Oscillator and identification circuit**

The burst phase detector is gated with the narrow part of the sandcastle pulse (pin 7). In the detector the (R-Y) and (B-Y) signals are added to provide the composite burst signal again. This composite signal is compared with the oscillator signal divided-by-2 ((R-Y) reference signal). The control voltage is available at pins 24 and 25, and is also applied to the 8,8 MHz oscillator. The 4,4 MHz signal is obtained via the divide-by-2 circuit, which generates both the (B-Y) and (R-Y) reference signals and provides a 90° phase shift between them.

The flip-flop is driven by pulses obtained from the sandcastle detector. For the identification of the phase at PAL mode, the (R-Y) reference signal coming from the PAL switch, is compared to the vertical signal (R-Y) of the PAL delay line. This is carried out in the H/2 detector, which is gated during burst. When the phase is incorrect, the flip-flop gets a reset from the identification circuit. When the phase is correct, the output voltage of the H/2 detector is directly related to the burst amplitude so that this voltage can be used for the a.c.c. To avoid 'blooming-up' of the picture under weak input signal conditions the a.c.c. voltage is generated by peak detection of the H/2 detector output signal.

The killer and identification circuits get their information from a gated output signal of the H/2 detector. Killing is obtained via the saturation control stage and the demodulators to obtain good suppression. The time constant of the saturation control (pin 5) provides a delayed switch-on after killing.

Adjustment of the oscillator is achieved by variation of the burst phase detector load resistance between pins 24 and 25 (see Fig. 7). With this application the trimmer capacitor in series with the 8,8 MHz crystal (pin 26) can be replaced by a fixed value capacitor to compensate for unbalance of the phase detector.

**Demodulator**

The (R-Y) and (B-Y) demodulators are driven by the colour difference signals from the delay-line matrix circuit and the reference signals from the 8,8 MHz divider circuit. The (R-Y) reference signal is fed via the PAL-switch. The output signals are fed to the R and B matrix circuits and to the (G-Y) matrix to provide the (G-Y) signal which is applied to the G-matrix. The demodulation circuits are killed and blanked by by-passing the input signals.

**NTSC mode**

The NTSC mode is switched on when the voltage at the burst phase detector outputs (pins 24 and 25) is adjusted below 9 V. To ensure reliable application the phase detector load resistors are external. When the TDA3566 is used only for PAL these two 33 kΩ resistors must be connected to + 12 V (see Fig. 7). For PAL/NTSC application the value of each resistor must be reduced to 10 kΩ and connected to the slider of a potentiometer (see Fig. 8). The switching transistor brings the voltage at pins 24 and 25 below 9 V which switches the circuit to the NTSC mode. The position of the PAL flip-flop ensures that the correct phase of the (R-Y) reference signal is supplied to the (R-Y) demodulator. The drive to the H/2 detector is now provided by the (B-Y) reference signal. (In the PAL mode it is driven by the (R-Y) reference signal.)

Hue control is realized by changing the phase of the reference drive to the burst phase detector. This is achieved by varying the voltage at pins 24 and 25 between 7,5 V and 8,5 V, nominal position 8,0 V. The hue control characteristic is shown in Fig. 5.



### RGB matrix and amplifiers

The three matrix and amplifier circuits are identical and only one circuit will be described.

The luminance and the colour difference signals are added in the matrix circuit to obtain the colour signal, which is then fed to the contrast control stage. The contrast control voltage is supplied to pin 6 (high-input impedance). The control range is +3 dB to -17 dB nominal. The relationship between the control voltage and the gain is linear (see Fig. 2).

During the 3-line period after blanking a pulse is inserted at the output of the contrast control stage. The amplitude of this pulse is varied by a control voltage at pin 11. This applies a variable offset to the normal black level, thus providing brightness control. The brightness control range is 1 V to 3 V.

While this offset level is present, the 'black-current' input impedance (pin 18) is high and the internal clamp circuit is activated. The clamp circuit then compares the reference voltage at pin 19 with the voltage developed across the external resistor network  $R_A$  and  $R_B$  (pin 18) which is provided by picture tube beam current. The output of the comparator is stored in capacitors connected from pins 10, 20 and 21 to ground which controls the black level at the output. The reference voltage is composed by the resistor divider network and the leakage current of the picture tube into this bleeder. During vertical blanking, this voltage is stored in the capacitor connected to pin 19, which ensures that the leakage current of the CRT does not influence the black current measurement.

The RGB output signals can never exceed a level of 10 V. When the signal tends to exceed this level the output signal is clipped. The black level at the outputs (pins 13, 15 and 17) will be about 3 V. This level depends on the spread of the guns of the picture tube. If a beam current stabilizer is not used it is possible to stabilize the black levels at the outputs, which in this application must be connected to the black current measuring input (pin 18) via a resistor network.

### Data insertion

Each colour amplifier has a separate input for data insertion. A 1 V peak-to-peak input signal provides a 4 V peak-to-peak output signal. To avoid the 'black-level' of the inserted signal differing from the black level of the normal video signal, the data is clamped to the black level of the luminance signal. Therefore a.c. coupling is required for the data inputs.

To avoid a disturbance of the blanking level due to the clamping circuit, the source impedance of the driver circuit must not exceed 150  $\Omega$ .

The data insertion circuit is activated by the data blanking input (pin 9). When the voltage at this pin exceeds a level of 0,9 V, the RGB matrix circuits are switched off and the data amplifiers are switched on. To avoid coloured edges, the data blanking switching time is short.

The amplitude of the data output signals is controlled by the contrast control at pin 6. The black level is equal to the video black level and can be varied between 2 and 4 V (nominal condition) by the brightness control voltage at pin 11.

Non-synchronized data signals do not disturb the black level of the internal signals.

### Blanking of RGB and data signals

Both the RGB and data signals can be blanked via the sandcastle input (pin 7). A slicing level of 1,5 V is used for this blanking function, so that the wide part of the sandcastle pulse is separated from the remainder of the pulse. During blanking a level of +1 V is available at the output.

To prevent parasitic oscillations on the third overtone of the crystal the optimal tuning capacitance should be 10 pF.

**RATINGS**

Limiting values in accordance with Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_P = V_{1-27}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		-25 to +70 °C

**THERMAL RESISTANCE**

From junction to ambient (in free air)	$R_{th\ j-a}$	=	40 K/W
--	---------------	---	--------

## CHARACTERISTICS

 $V_P = V_{1-27} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 1)</b>					
Supply voltage	$V_P = V_{1-27}$	10,8	12	13,2	V
Supply current	$I_P = I_1$	—	80	110	mA
Total power dissipation	$P_{\text{tot}}$	—	0,95	1,3	W
<b>Luminance amplifier (pin 8)</b>					
Input voltage (note 1) (peak-to-peak value)	$V_{8-27(p-p)}$	—	0,45	0,63	V
Input level before clipping	$V_{8-27}$	—	—	1	V
Input current	$I_8$	—	0,1	1	$\mu\text{A}$
Contrast control range (see Fig. 2)		—15	—	+5	dB
Input current contrast control	$I_7$	—	—	15	$\mu\text{A}$
<b>Chrominance amplifier (pin 4)</b>					
Input voltage (note 2) (peak-to-peak value)	$V_{4-27(p-p)}$	40	390	1100	mV
Input impedance (pin 4)	$ Z_{4-27} $	—	10	—	$\text{k}\Omega$
Input capacitance	$C_{4-27}$	—	—	6,5	pF
A.C.C. control range		30	—	—	dB
Change of the burst signal at the output over the whole control range	$\Delta V$	—	—	1	dB
Gain at nominal contrast/saturation pin 4 to pin 28 (note 3)	G	34	—	—	dB
Chrominance to burst ratio at nominal saturation (notes 2 and 3) at pin 28		—	12	—	dB
Maximum output voltage range (peak-to-peak value); $R_L = 2 \text{ k}\Omega$	$V_{28-27(p-p)}$	4	5	—	V
Distortion of chrominance amplifier at $V_{28-27(p-p)} = 2 \text{ V}$ (output) up to $V_{4-27(p-p)} = 1 \text{ V}$ (input)	d	—	—	5	%
Frequency response between 0 and 5 MHz	$\alpha_{28-4}$	—	—	—2	dB
Saturation control range (see Fig. 3)		50	—	—	dB
Input current saturation control (pin 5)	$I_5$	—	—	20	$\mu\text{A}$
Cross-coupling between luminance and chrominance amplifier (note 4)		—	—	—46	dB
Signal-to-noise ratio at nominal input signal (note 5)	S/N	56	—	—	dB

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Chrominance amplifier (continued)</b>					
Phase shift between burst and chrominance at nominal contrast/saturation	$\Delta\varphi$	—	—	$\pm 5$	deg
Output impedance of chrominance amplifier	$ Z_{28-27} $	—	10	—	$\Omega$
Output current	$I_{28}$	—	—	15	mA
<b>Reference part</b>					
Phase-locked-loop catching range (note 6)	$\Delta f$	500	700	—	Hz
phase shift for $\pm 400$ Hz deviation of $f_{osc}$ (note 6)	$\Delta\varphi$	—	—	5	deg
<b>Oscillator</b>					
temperature coefficient of oscillator frequency (note 6)	$TC_{osc}$	—	-2	-3	Hz/K
frequency variation when supply voltage increases from 10 to 13,2 V (note 6)	$\Delta f_{osc}$	—	40	100	Hz
input resistance (pin 26)	$R_{26-27}$	280	400	520	$\Omega$
input capacitance (pin 26)	$C_{26-27}$	—	—	10	pF
<b>A.C.C. generation (pin 2)</b>					
control voltage at nominal input signal	$V_{2-27}$	—	4,6	—	V
control voltage without chrominance input	$V_{2-27}$	—	2,6	—	V
colour-off voltage	$V_{2-27}$	—	3,4	—	V
colour-on voltage	$V_{2-27}$	—	3,6	—	V
identification-on voltage	$V_{2-27}$	—	2,0	—	V
change in burst amplitude with temperature voltage at pin 3 at nominal input signal	$V_{3-27}$	—	0,1	0,25	%/K
		—	5,1	—	V
<b>Demodulator part</b>					
Input burst signal amplitude (peak-to-peak value between pins 23 and 27 (note 7)	$V_{23-27(p-p)}$	68	80	95	mV
Input impedance between pins 22 or 23 and 27	$ Z_{22-27/23-27} $	0,7	1	1,3	k $\Omega$
Ratio of demodulated signals (note 8)					
(B-Y)/(R-Y)	$\frac{V_{17-27}}{V_{13-27}}$	—	$1,78 \pm 10\%$	—	
(G-Y)/(R-Y); no (B-Y) signal	$\frac{V_{15-27}}{V_{13-27}}$	—	$-0,51 \pm 10\%$	—	
(G-Y)/(B-Y); no (R-Y) signal	$\frac{V_{15-27}}{V_{17-27}}$	—	$-0,19 \pm 10\%$	—	

parameter	symbol	min.	typ.	max.	unit
<b>Demodulator part (continued)</b>					
Frequency response between 0 and 1 MHz	$\alpha_{17}$	—	—	—3	dB
Cross-talk between colour difference signals		40	—	—	dB
Phase difference between (R-Y) signal and (R-Y) reference signals	$\Delta\varphi$	—	—	5	deg
Phase difference between (R-Y) signal and (B-Y) reference signals	$\Delta\varphi$	85	90	95	deg
<b>RGB matrix and amplifiers</b>					
Output voltage (peak-to-peak value) at nominal luminance/contrast (black-to-white) (note 3)	$V_{13,15,17-27(p-p)}$	3,5	4	4,5	V
Output voltage at pin 13 (peak-to-peak value) at nominal contrast/saturation and no luminance signal to (R-Y)	$V_{13-27(p-p)}$	—	4,2	—	V
Maximum peak-white level	$V_{13,15,17(m)}$	9,7	10	10,3	V
Available output current (pins 13, 15 17)	$I_{13,15,17}$	10	—	—	mA
Difference between black level and measuring level at the output for a brightness control voltage at pin 11 of 2 V (note 9)	$\Delta V_{13,15,17-27}$	—	0	—	V
Difference in black level between the three channels without black current stabilization (note 10)	$\Delta V$	—	—	100	mV
Control range of black-current stabilization at $V_{b1} = 3 \text{ V}$ ; $V_{11-17} = 2 \text{ V}$		—	—	$\pm 2$	V
Black level shift with vision contents	$\Delta V$	—	—	40	mV
Brightness control voltage range		see Fig. 4			
Brightness control input current	$I_{11}$	—	—	5	$\mu\text{A}$
Variation of black level with temperature	$\Delta V/\Delta T$	—	0	—	mV/K
Variation of black level with contrast*	$\Delta V$	—	—	100	mV
Relative spread between the R, G and B output signals		—	—	10	%
Relative black-level variation between the three channels during variation of contrast, brightness and supply voltage ( $\pm 10\%$ )*	$\Delta V$	—	0	20	mV
Differential black-level drift over a temperature range of 40 °C	$\Delta V$	—	0	20	mV
Blanking level at the RGB outputs	$V_{bl}$	—	0,95	1,1	V

\* With respect to the measuring pulses.

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>RGB matrix and amplifiers (continued)</b>					
Difference in blanking level of the three channels	$V_{bl}$	—	0	—	mV
Differential drift of the blanking levels over a temperature range of 40 °C	$V_{bl}$	—	0	10	mV
Tracking of output black level with supply voltage	$\frac{\Delta V_{bl}}{V_{bl}} \times \frac{V_P}{\Delta V_P}$	0,9	1	1,1	
Tracking of contrast control between the three channels over a control range at 10 dB		—	—	0,5	dB
Output signal during the clamp pulse (3L) after switch-on	$V_O$	7,5	—	—	V
Signal-to-noise ratio of output signals (note 5)	S/N	62	—	—	dB
Residual 4,4 MHz signal at RGB outputs (peak-to-peak value)	$V_{R(p-p)}$	—	—	50	mV
Residual 8,8 MHz signal and higher harmonics at the RGB outputs (peak-to-peak value)	$V_{R(p-p)}$	—	—	150	mV
Output impedance of RGB outputs	$ Z_{13,15,17-27} $	—	50	—	$\Omega$
Frequency response of total luminance and RGB amplifier circuits for $f = 0$ to 5 MHz	$\alpha$	—	—1	—3	dB
Current source of output stage	$I_O$	2	3	—	mA
Difference of black level at the three outputs at nominal brightness*	$\Delta V$	—	—	10	mV
Tracking of brightness control		—	—	2	%
<b>Signal insertion (pins 12, 14 and 16)</b>					
Input signals (peak-to-peak value) for and RGB output voltage of 4 V (peak-to-peak) at nominal contrast	$V_{12,14,16-27(p-p)}$	0,9	1	1,1	V
Difference between the black levels of the RGB signals and the inserted signals at the output (note 11)	$\Delta V$	—	—	100	mV
Output rise time	$t_r$	—	50	80	ns
Differential delay time for the three channels	$t_d$	—	0	40	ns
Input current	$I_{12,14,16}$	—	—	10	$\mu A$

\* With respect to the measuring pulses.

parameter	symbol	min.	typ.	max.	unit
<b>Data blanking (pin 9)</b>					
Input voltage for no data insertion	$V_{9-27}$	—	—	0,4	V
Input voltage for data insertion	$V_{9-27}$	0,9	—	—	V
Maximum input voltage	$V_{9-27(m)}$	—	—	3	V
Delay of data blanking	$t_d$	—	—	20	ns
Input resistance	$R_{9-27}$	7	10	13	$k\Omega$
Suppression of the internal RGB signals when $V_{9-27} > 0,9$ V		46	—	—	dB
<b>Sandcastle input (pin 7)</b>					
Level at which the RGB blanking is activated	$V_{7-27}$	1	1,5	2	V
Level at which the horizontal pulses are separated	$V_{7-27}$	3	3,5	4	V
Level at which burst gating and clamping pulse are separated	$V_{7-27}$	6,5	7,0	7,5	V
Delay between black level clamping and burst gating pulse	$t_d$	—	0,6	—	$\mu s$
Input current at $V_{7-27} = 0$ to 1 V	$-I_7$	—	—	1	mA
at $V_{7-27} = 1$ to 8,5 V	$I_7$	—	—	50	$\mu A$
at $V_{7-27} = 8,5$ to 12 V	$I_7$	—	—	2	mA
<b>Black current stabilization (pin 18)</b>					
Bias voltage (d.c.)	$V_{18-27}$	3,5	5	7,0	V
Difference between input voltage for 'black' current and leakage current	$\Delta V$	0,35	0,5	0,65	V
Input current during 'black' current	$I_{18}$	—	—	1	$\mu A$
Input current during scan	$I_{18}$	—	—	10	mA
Internal limiting at pin 10	$V_{18-27}$	8,5	9	9,5	V
Switching threshold for 'black' current control ON	$V_{18-27}$	7,6	8	8,4	V
Input resistance during scan	$R_{18-27}$	1	1,5	2	$k\Omega$
Input current during scan at pins 10, 20 and 21 (d.c.)	$I_{10, 20, 21}$	—	—	tbf	nA
Maximum charge/discharge current during measuring time		—	1	—	nA
<b>NTSC</b>					
Level at which the PAL/NTSC switch is activated (pins 24 and 25)	$V_{24-25}$	—	8,8	9,2	V
Average output current (note 12)	$I_{24 + 25(AV)}$	75	90	105	$\mu A$
Hue control			see Fig. 5		

**Notes to the characteristics**

1. Signal with the negative-going sync; amplitude includes sync amplitude.
2. Indicated is a signal for a colour bar with 75% saturation; chrominance to burst ratio is 2,2 : 1.
3. Nominal contrast is specified as the maximum contrast  $-5$  dB and nominal saturation as the maximum saturation  $-6$  dB.
4. Cross coupling is measured under the following condition: input signal nominal, contrast and saturation such that nominal output signals are obtained. The signals at the output at which no signal should be available must be compared with the nominal output signal at that output.
5. The signal-to-noise ratio is defined as peak-to-peak signal with respect to r.m.s. noise.
6. All frequency variations are referred to 4,4 MHz carrier frequency.
7. These signal amplitudes are determined by the a.c.c. circuit of the reference part.
8. The demodulators are driven by a chrominance signal of equal amplitude for the (R-Y) and the (B-Y) components. The phase of the (R-Y) chrominance signal equals the phase of the (R-Y) reference signal. This also applies to the (B-Y) signals.
9. This value depends on the gain setting of the RGB output amplifiers and the drift of the picture tube guns. Higher black level values are possible (up to 5 V) but in that application the amplitude of the output signal is reduced.
10. The variation of the black-level during brightness control in the three different channels is directly dependent on the gain of each channel. Discolouration during adjustments of contrast and brightness does not occur because amplitude and the black-level change with brightness control are directly related.
11. This difference occurs when the source impedance of the data signals is  $150 \Omega$  and the black level clamp pulse width is  $4 \mu\text{s}$  (sandcastle pulse). For a lower impedance the difference will be lower.
12. The voltage at pins 24 and 25 can be changed by connecting the load resistors ( $10 \text{ k}\Omega$  in this application) to the slider bar of the hue control potentiometer (see Fig. 8). When the transistor is switched on, the voltage at pins 24 and 25 is reduced below 9 V, and the circuit is switched to NTSC mode. The width of the burst gate is assumed to be  $4 \mu\text{s}$  typical.



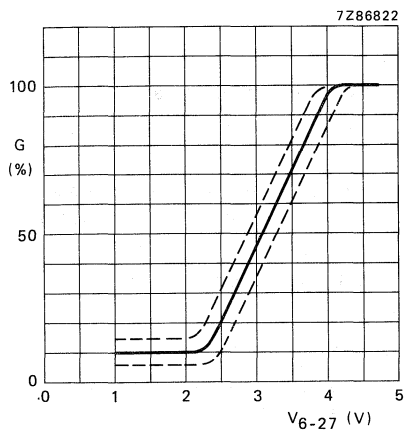


Fig. 2 Contrast control voltage range.

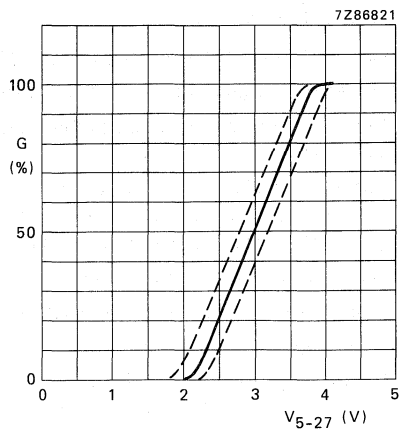


Fig. 3 Saturation control voltage range.

DEVELOPMENT DATA

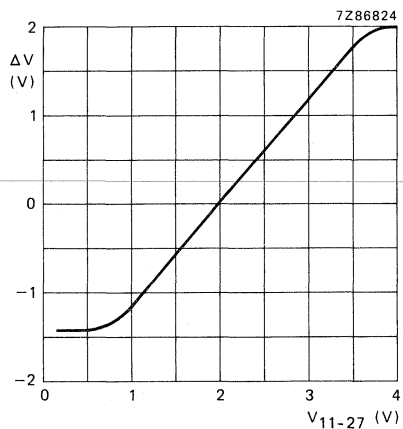


Fig. 4 Difference between black level and measuring level at the RGB outputs ( $\Delta V$ ) as a function of the brightness control input voltage ( $V_{11-27}$ ).

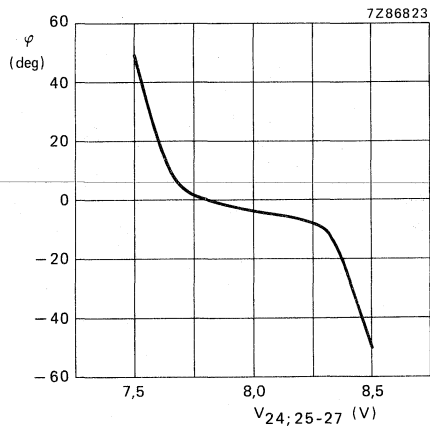


Fig. 5 Hue control voltage range.

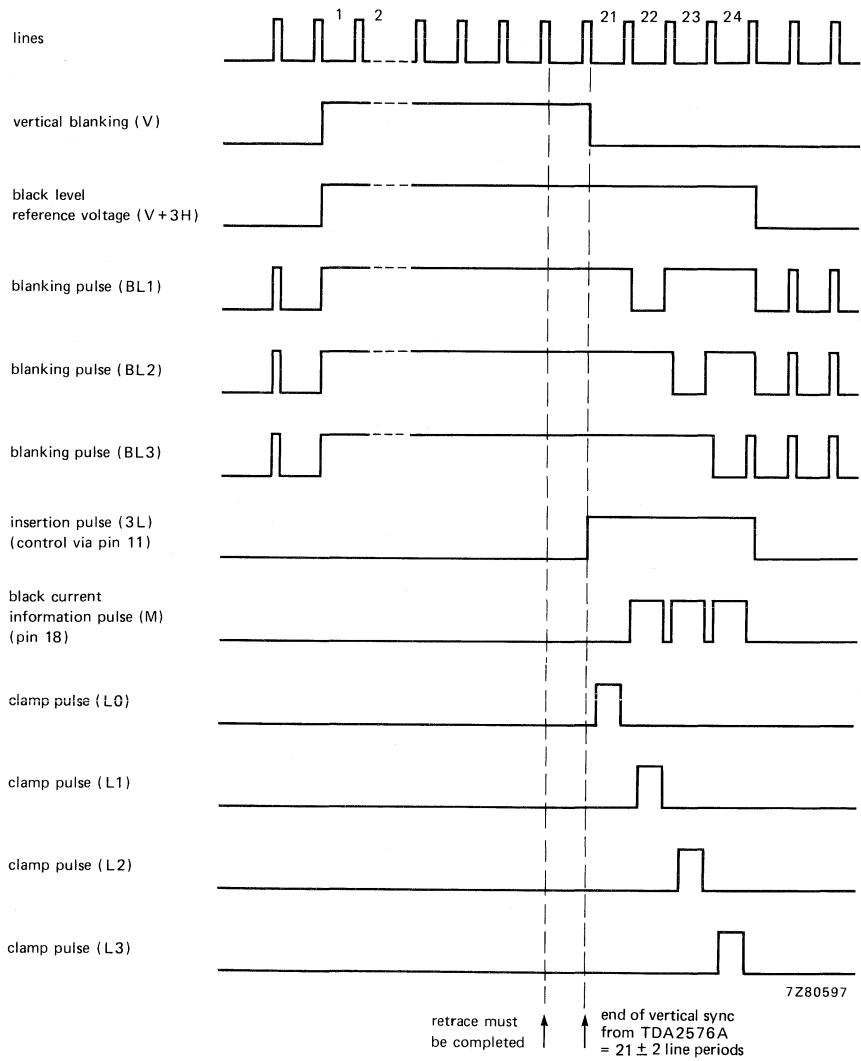


Fig. 6 Timing diagram for black-current stabilizing.

DEVELOPMENT DATA

APPLICATION INFORMATION

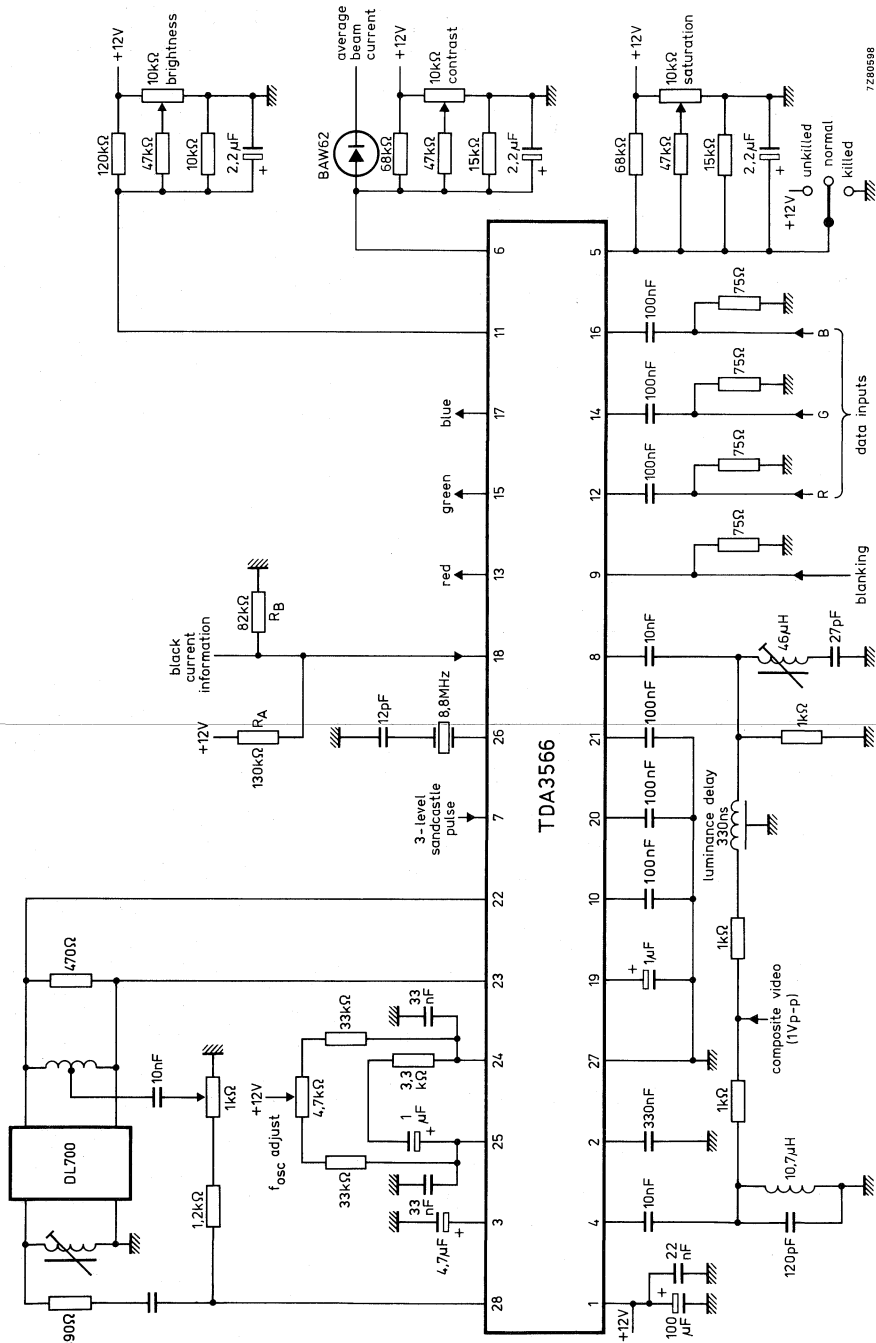


Fig. 7 Application diagram showing the TDA3566 for a PAL decoder.

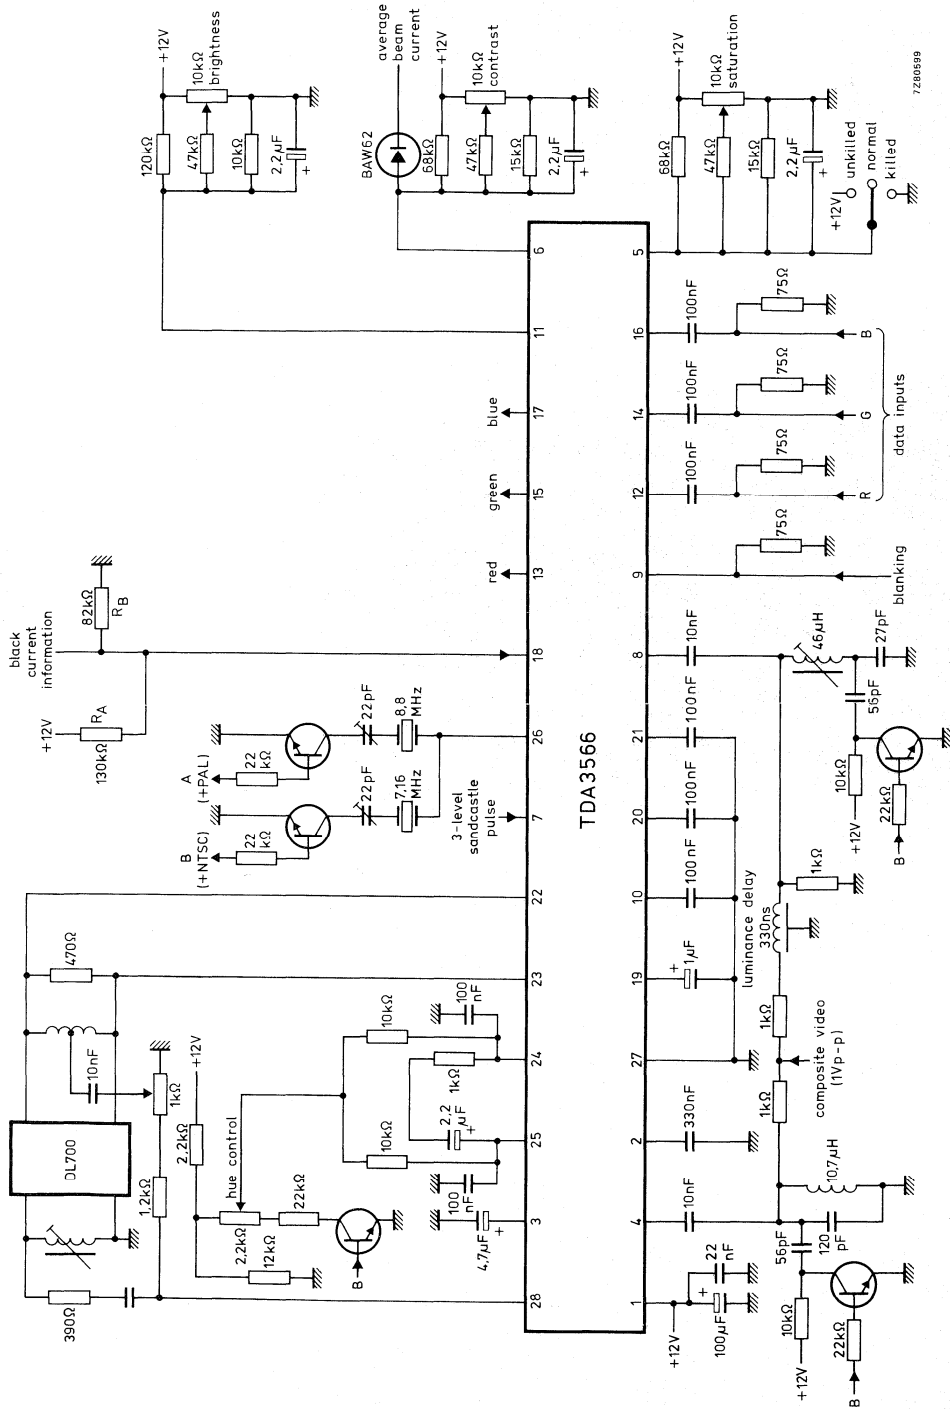


Fig. 8 Application diagram showing the TDA3566 for a PAL/NTSC decoder.

7280699

DEVELOPMENT DATA

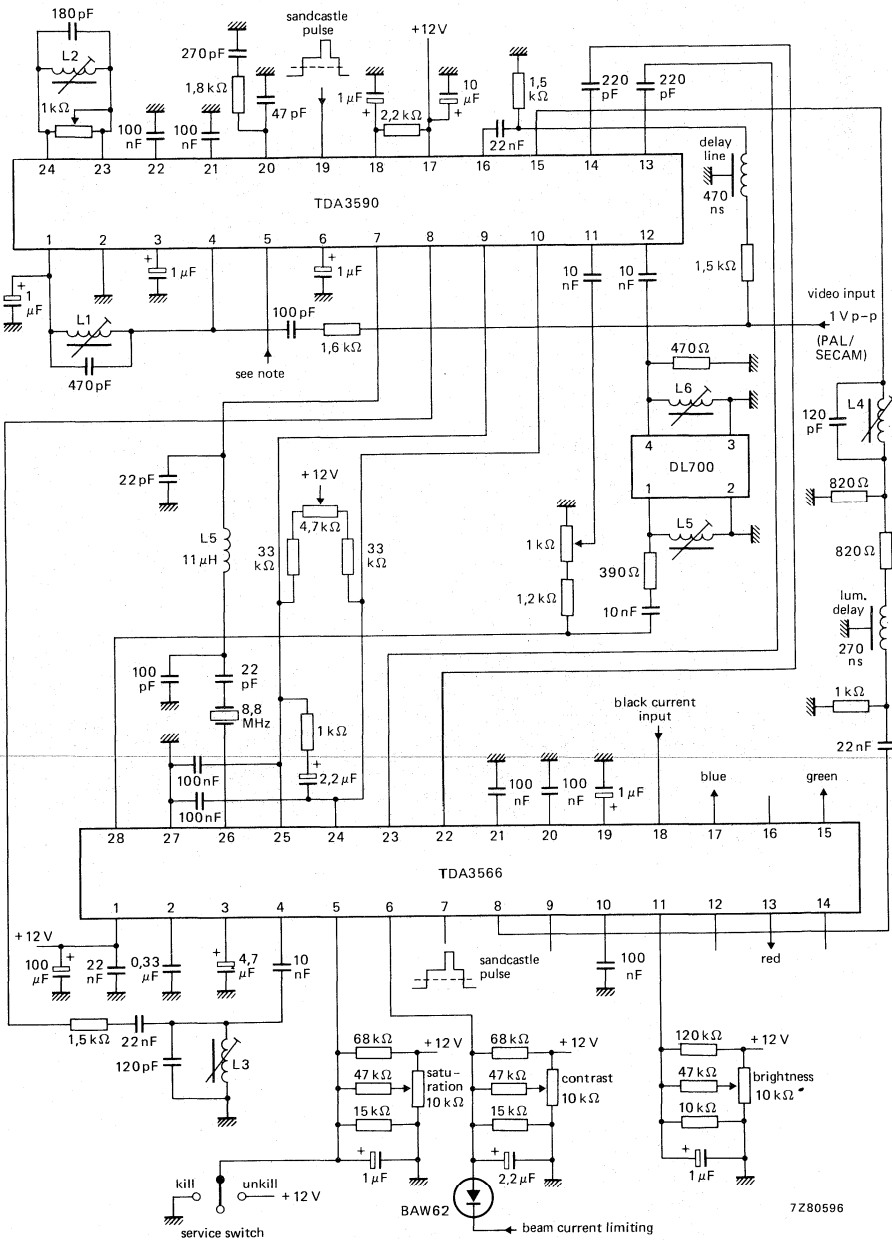


Fig. 9 PAL/SECAM application circuit diagram using the TDA3590 and TDA3566.

Note to pin 5 TDA3590:

- V<sub>5-2</sub> < 1 V; horizontal identification and black level clamping.
- V<sub>5-2</sub> > 11 V; vertical identification and artificial black level.
- V<sub>5-2</sub> = 5 to 7 V; horizontal identification and artificial black level.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3567

## NTSC DECODER

### GENERAL DESCRIPTION

The TDA3567 is a monolithic integrated decoder for the NTSC colour television standards. It combines all functions required for the demodulation of NTSC signals. Further more it contains a luminance amplifier, an RGB-matrix and amplifier. These amplifiers supply output signals up to 5 V peak-to-peak (picture information) enabling direct drive of the discrete output stages.

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage	pin 1	$V_P = V_{1-17}$	9	12	13,2	V
Supply current	pin 1	$I_P = I_1$	—	65	—	mA
<b>Luminance input signal</b>	pin 8					
Input voltage (peak-to-peak value)		$V_{8-17(p-p)}$	—	0,45	—	V
Contrast control range			—	20	—	dB
<b>Chrominance amplifier</b>	pin 3					
Input voltage (peak-to-peak value)		$V_{3-17(p-p)}$	—	550	—	mV
Saturation control range			50	—	—	dB
<b>RGB matrix and amplifiers</b>						
Output voltage at nominal luminance input signal and nominal contrast (peak-to-peak value)		$V_{10,11,12-17(p-p)}$	4,0	5,0	6,0	V
<b>Sandcastle input</b>	pin 7					
Blanking input voltage		$V_{7-17}$	1,0	1,5	2,0	V
Burst gating and clamping input voltage		$V_{7-17(p-p)}$	6,5	7,0	7,5	V

### PACKAGE OUTLINE

18-lead DIL; plastic, with internal heatspreader (SOT-102H).

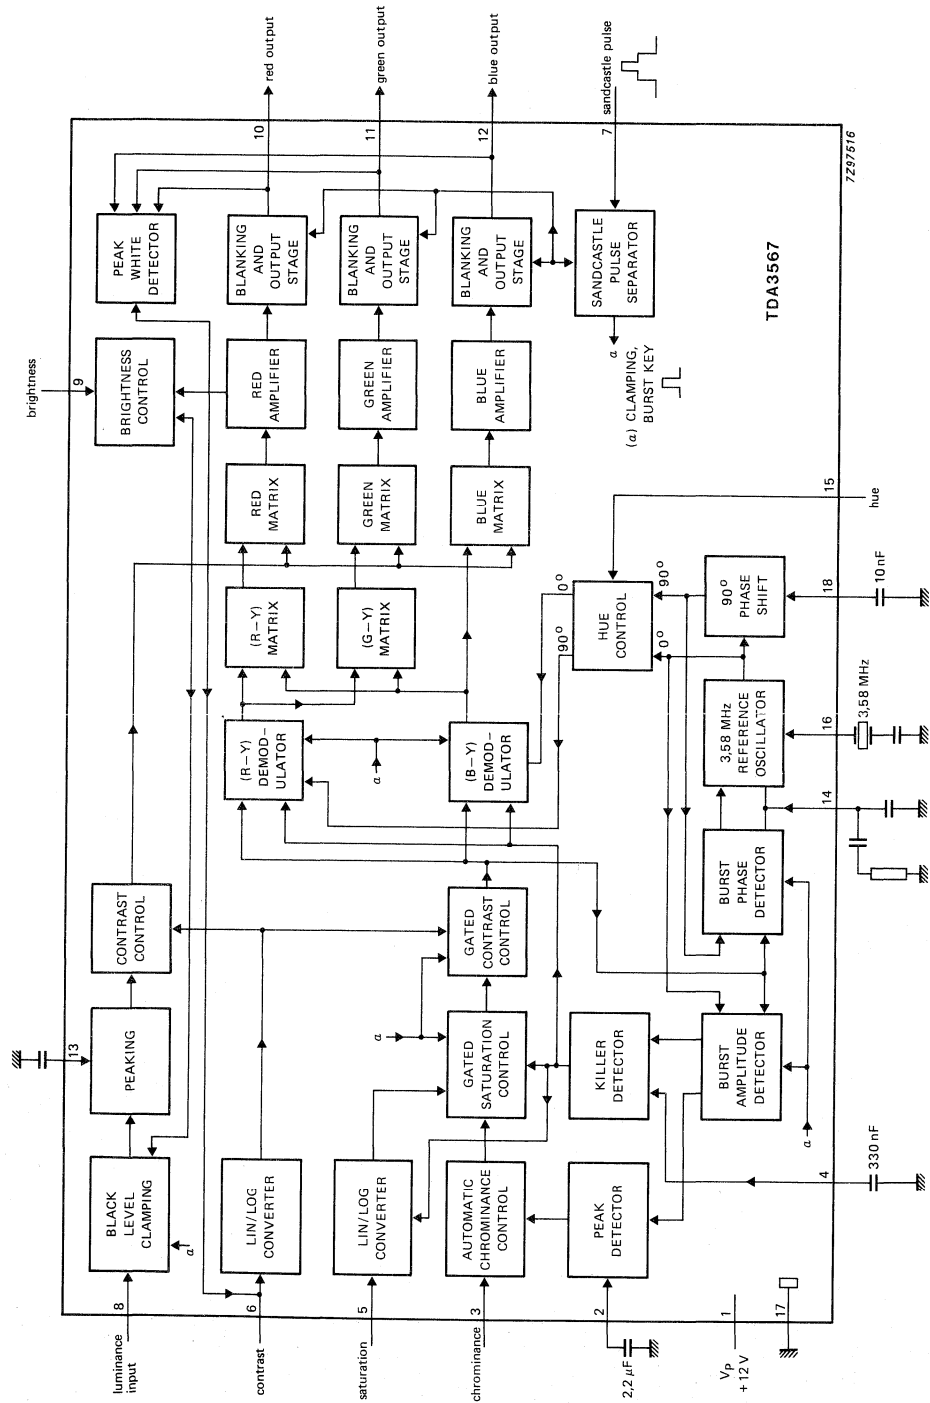


Fig. 1 Block diagram.



## FUNCTIONAL DESCRIPTION

### Luminance amplifier

The luminance amplifier is voltage driven and requires an input signal of 450 mV peak-to-peak\*. The luminance delay line must be connected between the i.f. amplifier and the decoder. The input signal must be a.c. coupled to the input pin 8.

The black level clamp circuit of the RGB amplifiers uses the coupling capacitor as a storage capacitor. After clamping the signal is fed to a peaking stage. The RC network connected to pin 13 is used to define the amount of overshoot.

The peaking stage is followed by a contrast control stage. The control voltage has to be supplied to pin 6. The control voltage range is nominally  $-17$  to  $+3$  dB. The linear curve of the contrast control voltage is shown in Fig. 2.

### Chrominance amplifier

The chrominance amplifier has an asymmetrical input. The input signal at pin 3 must be a.c. coupled, and must have an amplitude of 550 mV peak-to-peak. The gain control stage has a control range in excess of 30 dB, the maximum input signal should not exceed 1,1 V peak-to-peak, otherwise clipping of the input signal will occur. From the gain control stage the chrominance signal is fed to the saturation and contrast control stages. Chrominance and luminance control stages are directly coupled to obtain good tracking. The saturation is linearly controlled via pin 5. The control voltage range is 2 V to 4 V. The impedance is high and the saturation control range is in excess of 50 dB. The burst signal is not affected by contrast or saturation control. After the amplification and control stages the chrominance signal is internally fed to the (R-Y) and (B-Y) demodulators, burst phase and a.c.c. detectors.

### Oscillator and a.c.c. circuit

The 3,58 MHz reference oscillator operates at the subcarrier frequency. The crystal must be connected between pin 16 and ground. The oscillator does not require adjustment due to the small spreads of the IC. The free running frequency of the oscillator can be checked by connecting the saturation control (pin 5) to the positive supply line. Then the loop is opened, so that the frequency can be measured. The oscillator has an internal gain limiting stage which controls the gain to unity, so that internal signals are sinusoidal. This prevents the generation of higher harmonics of the subcarrier signals. The burst signal is compared to a  $0^\circ$  reference signal by the burst amplitude detector and is then amplified and fed to a peak detector for a.c.c. and to a sample and hold circuit which drives the colour killer circuit. The reference signal for the burst phase detector is provided by the  $90^\circ$  phase shifted signal. An RC network is used to obtain the required catching range and noise immunity for the output voltage of the burst phase detector.

The hue control is obtained by mixing oscillator signals with a phase of  $0^\circ$  and  $90^\circ$  before they are fed to the (R-Y) and (B-Y) demodulators. The  $90^\circ$  phase shifted signal is provided by a miller integrator (biased by pin 18). As the hue control is independent of the PLL, the control will react without time delay on the control voltage changes.

DEVELOPMENT DATA

\* Signal with negative going sync; amplitude includes sync pulse amplitude.

**FUNCTIONAL DESCRIPTION** (continued)**Demodulator circuits**

The demodulators are driven by the amplified and controlled chrominance signals, the reference signals are obtained from the hue control circuit. In nominal hue control position the phase angle of (R-Y) reference signal is  $0^\circ$ , the phase angle of the (B-Y) reference signal is  $90^\circ$ .

For flesh tone corrections the demodulated (R-Y) signal is matrixed with the demodulated (B-Y) signal according to the following equations:

$$(R-Y)_{\text{matrixed}} = 1,61 (R-Y)_{\text{IN}} - 0,42 (B-Y)_{\text{IN}}$$

$$(G-Y)_{\text{matrixed}} = 0,43 (R-Y)_{\text{IN}} - 0,11 (B-Y)_{\text{IN}}$$

$$(B-Y)_{\text{matrixed}} = (B-Y)_{\text{IN}}$$

In these equations  $(R-Y)_{\text{IN}}$  and  $(B-Y)_{\text{IN}}$  indicate the colour difference signal amplitudes, when the chrominance signal is demodulated with a phase difference between the R-Y and B-Y demodulator of  $90^\circ$  and a gain ratio  $B-Y/R-Y = 1,78$ .

**RGB matrix circuit and amplifiers**

The three matrix and amplifier circuits are identical. The luminance signal and the colour difference signals are added in the matrix circuit to obtain the colour signal.

Output signals are 5 V (peak-to-peak) (black-white) for the following nominal input signals and control settings.

- Luminance 450 mV (peak-to-peak)
- Chrominance 550 mV (peak-to-peak) (burst-to-chrominance ratio of the input 1 : 2.2)
- Contrast -3 dB (maximum)
- Saturation -10 dB (maximum)

The maximum available output voltage is approximately 7 V (peak-to-peak). The black level of the red channel is compared with a variable external reference level (pin 9), which provides the brightness control. The control loop is closed via the luminance input.

The luminance input is varied to control the black level control, therefore the green and blue outputs will follow any variation of the red output. The output of the black control can be varied between 2 V to 4 V. The corresponding brightness control voltage is shown in Fig. 4.

If the output signal surpasses the level of 9 V the peak-white limiter circuit becomes active and reduces the output signal via the contrast control.

**Blanking of RGB signals**

A slicing level of about 1,5 V is used for this blanking function, so that the wide part of the sandcastle pulse is separated from the rest of the pulse. During blanking a level of + 2 V is available at the output.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_P = V_{1-17}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-25 to + 65 °C

**THERMAL RESISTANCE**

From junction to ambient (in free air)	$R_{th\ j-a}$	=	50 K/W
--	---------------	---	--------

**CHARACTERISTICS** $V_P = V_{1-17} = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage		$V_P = V_{1-17}$	9	12	13,2	V
Supply current		$I_P = I_1$	—	65	—	mA
Total power dissipation		$P_{tot}$	—	0,78	—	W
<b>Luminance input signal</b>						
Input voltage (peak-to-peak value)	note 1 pin 8	$V_{8-17(p-p)}$	—	450	—	mV
Input voltage level before clipping occurs in the input stage		$V_{8-17}$	—	—	1	V
Input current		$I_8$	—	0,15	1,0	$\mu\text{A}$
Contrast control range	see Fig. 2		-17	—	+3	dB
Input current contrast control	for $V_{6-17} < 6\text{ V}$	$I_7$	—	0,5	15	$\mu\text{A}$
Input current when the peak-white limiter is active	$V_{6-17} = 2,5\text{ V}$	$I_7$	—	5,5	—	mA
Input resistance	$V_{6-17} > 6\text{ V}$	$R_{7-17}$	1,4	2,0	2,6	k $\Omega$
<b>Peaking of luminance signal</b>						
Output impedance	pin 13	$ Z_{13-17} $	—	200	—	$\Omega$
Ratio of internal/external current when pin 13 is short-circuited			—	3	—	

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Chrominance amplifier</b>						
Input signal amplitude (peak-to-peak value)	note 2 pin 3	$V_{3-17(p-p)}$	—	550	—	mV
Input signal amplitude before clipping occurs in the input stage (peak-to-peak value)		$V_{3-17(p-p)}$	—	—	1,1	V
Minimum burst signal amplitude within the a.c.c. control range (peak-to-peak)			35	—	—	mV
A.C.C. control range			30	—	—	dB
Change of the burst signal at the output for the complete control range		$\Delta V$	—	—	+ 1	dB
Input impedance	pin 3	$ Z_{3-17} $	6	8	10	k $\Omega$
Input capacitance	pin 3	$C_{3-17}$	—	4	6	pF
Saturation control range	see Fig. 3		50	—	—	dB
Input current saturation control	for $V_{5-17} > 6 V$	$I_5$	—	1	20	$\mu A$
Input impedance	$V_{5-17} = 6 V$ to 10 V	$ Z_{5-17} $	1,4	2,0	2,6	k $\Omega$
Input impedance when the colour killer is active		$ Z_{5-17} $	1,4	2,0	2,6	k $\Omega$
Input impedance	for $V_{5-17} > 10 V$	$ Z_{5-17} $	0,7	1,0	1,3	k $\Omega$
Tracking between luminance and chrominance contrast	for 10 dB of control		—	1	2	dB
Cross coupling between luminance and chrominance amplifier	note 4		—	-50	-46	dB
<b>Reference part</b>						
<b>Phase locked loop</b>						
Catching range		$\Delta f$	$\pm 400$	$\pm 500$	—	Hz
Phase shift for 400 Hz deviation of the carrier frequency		$\Delta$	—	—	5	deg

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Oscillator</b>						
Temperature coefficient of oscillator frequency		$TC_{osc}$	—	1,5	2,5	Hz/K
Frequency deviation	$\Delta V_p = \pm 10\%$	$\Delta f_{osc9}$	—	150	250	Hz
Input resistance	pin 16	$R_{16-17}$	260	360	460	$\Omega$
Input capacitance	pin 16	$C_{22-17}$	—	—	10	pF
<b>A.C.C. generation</b>						
Voltage at pin 4 nominal input signal		$V_{4-17}$	—	4,0	—	V
Voltage at pin 4 without burst input		$V_{4-17}$	—	1,9	—	V
Colour-off voltage		$V_{4-17}$	—	2,5	—	V
Colour-on voltage		$V_{4-17}$	—	2,8	—	V
Change in burst amplitude with temperature			—	0,1	—	%/K
Change in burst amplitude with 10% supply voltage change			—	0	—	%/V
Voltage at pin 2 at nominal input signal		$V_{2-17}$	—	5,0	—	V
<b>Hue control</b>						
Control voltage range			see Fig. 5			
Input current	for $V_{15-17} < 5\text{ V}$	$I_{14}$	—	0,5	20	$\mu\text{A}$
Input impedance	for $V_{15-17} > 5\text{ V}$	$ Z_{14-17} $	1,5	2,5	3,5	k $\Omega$
<b>Demodulation part</b>						
Ratio of demodulation signals (measured at the various outputs)	note 7					
(R-Y)/(B-Y); no (R-Y) signal		$\frac{V_{10-17}}{V_{12-17}}$	—	-0,42	—	
(R-Y)/(B-Y); colour bar signal		$\frac{V_{10-17}}{V_{12-17}}$	—	1,4	—	
(G-Y)/(R-Y); no (B-Y) signal		$\frac{V_{11-17}}{V_{12-17}}$	—	-0,25	—	
(G-Y)/(B-Y); no (R-Y) signal		$\frac{V_{11-17}}{V_{12-17}}$	—	-0,11	—	
Frequency response	0 to 0,7 MHz		—	—	-3	dB

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>RGB matrix and amplifier</b>						
Output signal amplitude	at nominal luminance input signal and nominal contrast (peak-to-peak value) note 3 black-white	$V_{10,11,12-17(p-p)}$	4,0	5,0	6,0	V
Output signal amplitude of the "blue" channel	at nominal contrast and saturation control setting and no luminance signal to the input (B-Y) signal (peak-to-peak value)	$V_{12-17(p-p)}$	—	3,8	—	V
Maximum peak-white level	note 6	$V_{10,11,12-7}$	9,0	9,3	9,6	V
Maximum output current		$I_{10,11,12-17}$	—	—	10	mA
Difference in the black level between the three channels			—	—	600	mV
Black level shift with vision content			—	10	40	mV
Brightness control voltage range			see Fig. 4			
Brightness control input current		$I_g$	—	—	-50	$\mu$ A
Black level variation with temperature		V/T	—	0,15	1,0	mV/K
Black level variation with contrast control		$\Delta V$	—	75	200	mV
Relative spread between the three output signals			—	—	10	%
Relative variation in black level between the three channels	during variations of contrast (10 dB), brightness ( $\pm 1$ V), and supply voltage ( $\pm 10\%$ )	$\Delta V$	—	0	20	mV
Differential drift of black level over a temperature range of 40 °C		$\Delta V$	—	0	20	mV
Blanking level at the RGB outputs		$V_{b1}$	1,95	2,15	2,35	V

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Tracking of output black levels with supply voltage		$\frac{\Delta V_{b1}}{V_{b1}} \times \frac{V_P}{\Delta V_P}$	1,0	1,05	1,1	
Signal-to-noise ratio of output signals	note 5	S/N	62	—	—	dB
Residual 3,58 MHz in RGB outputs (peak-to-peak value)		$V_{R(p-p)}$	—	50	75	mV
Residual 7,1 MHz and higher harmonics in the RGB outputs (peak-to-peak value)		$V_{R(p-p)}$	—	50	75	mV
RGB output impedance		$ Z_{10,11,12-17} $	—	—	50	
Frequency response of total luminance and RGB amplifier circuits	0 to 5 MHz		—	—	—3	dB
<b>Sandcastle input</b>						
Level at which the RGB blanking is activated		$V_{7-17}$	1,0	1,5	2,0	V
Level at which burst gate clamping pulses are separated		$V_{7-17}$	6,5	7,0	7,5	V
Delay between black level clamping and burst gating pulse		$t_d$	300	375	450	ns
Input currents	$V_{7-17} = 0$ to 1 V	$I_7$	—	—	—1	mA
	$V_{7-17} = 1$ to 8,5 V	$I_7$	—	—20	—40	$\mu$ A
	$V_{7-17} = 8,5$ to 12 V	$I_7$	—	—	2	mA

**Noted to the characteristics**

- Signal with negative going sync; amplitude includes sync pulse amplitude.
- Indicated is a signal for colour bar with 75% saturation, so the chrominance to burst ratio is 2,2 : 1.
- Nominal contrast is specified as maximum contrast —3 dB and nominal saturation as maximum saturation —10 dB.
- Cross coupling is measured under the following condition:
  - input signals nominal;
  - contrast and saturation such that nominal output signals are obtained;
  - the signals at the output at which no signal should be available must be compared with the nominal output signal at that output.
- The signal-to-noise ratio is specified as peak-to-peak signal with respect to RMS noise.
- When this level is exceeded the amplifier of the output signal is reduced via a discharge of the capacitor on pin 7 (contrast control). Discharge current is 5,5 mA.
- These matrixed values are found by measuring the ratio of the various output signals. The values are derived from the matrix equations given in the section 'FUNCTIONAL DESCRIPTION'.

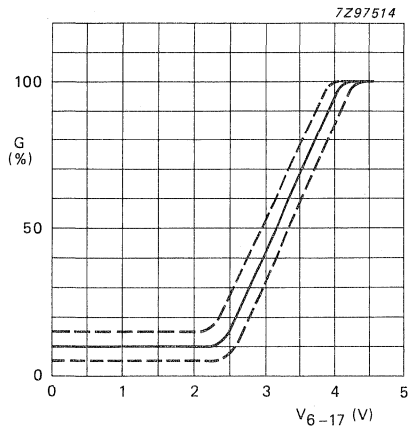


Fig. 2 Contrast control voltage range.

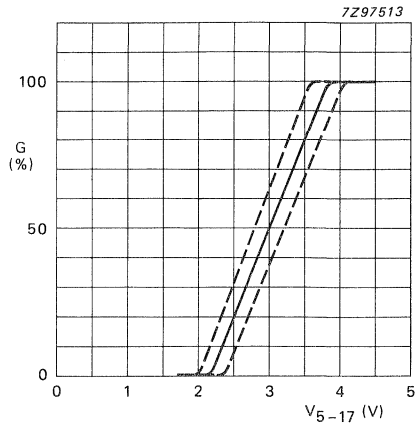


Fig. 3 Saturation control voltage range.

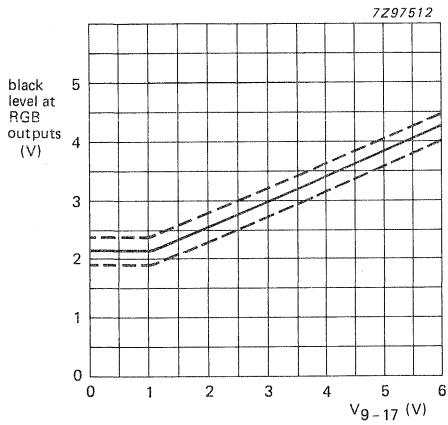


Fig. 4 Brightness control voltage range.

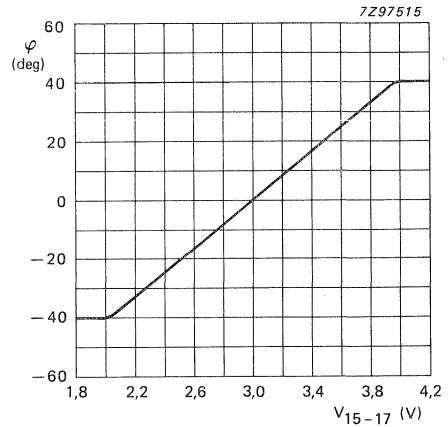


Fig. 5 Hue control voltage range.



APPLICATION INFORMATION

DEVELOPMENT DATA

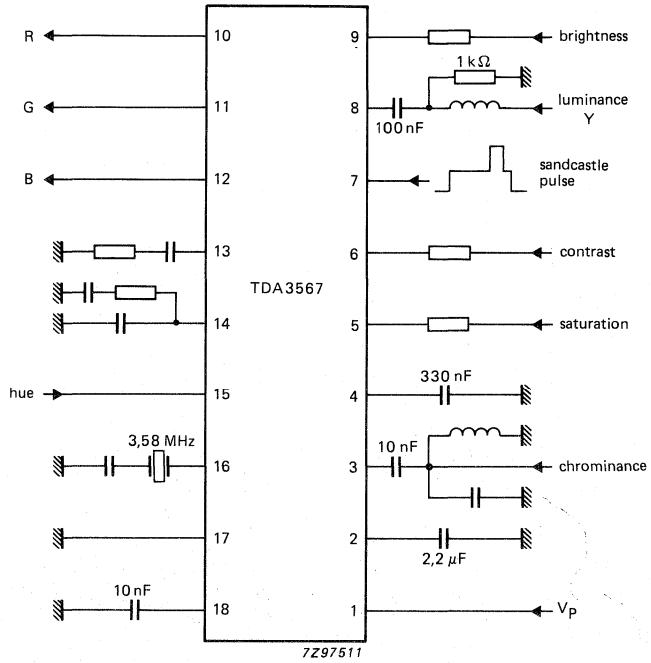


Fig. 6 Application diagram.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3569

## NTSC DECODER WITH FAST RGB BLANKING

### GENERAL DESCRIPTION

The TDA3569 NTSC decoder combines luminance amplifier, RGB matrix and RGB amplifiers to provide NTSC demodulation and direct drive of discrete output stages. A facility for fast blanking of the RGB outputs is included.

### Features

- Automatic chrominance levelling (avoids saturation at chrominance input)
- Peaking circuit with d.c. control
- Fast RGB output blanking

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage		$V_P = V_{1-19}$	10,8	12	13,2	V
Supply current		$I_1$	—	65	—	mA
<b>Luminance input signal</b>						
Input voltage (peak-to-peak value)		$V_{8-19(p-p)}$	—	450	—	mV
Contrast control range			—	-17 to +3	—	dB
<b>Chrominance amplifier</b>						
Input voltage (peak-to-peak value)		$V_{3-19(p-p)}$	—	550	—	mV
Saturation control range			50	—	—	dB
<b>RGB matrix</b>						
Output voltage (peak-to-peak value)	nominal luminance signal and nominal contrast (black-white)	$V_{12,13,14-19}$	4	5	6	V
<b>Sandcastle input</b>						
RGB blanking level		$V_{7-19}$	1,0	1,5	2,0	V
Burst gate/clamping pulse separation level		$V_{7-19}$	6,5	7,0	7,5	V

### PACKAGE OUTLINE

20-lead DIL; plastic with internal heat-spreader (SOT-146EE7).

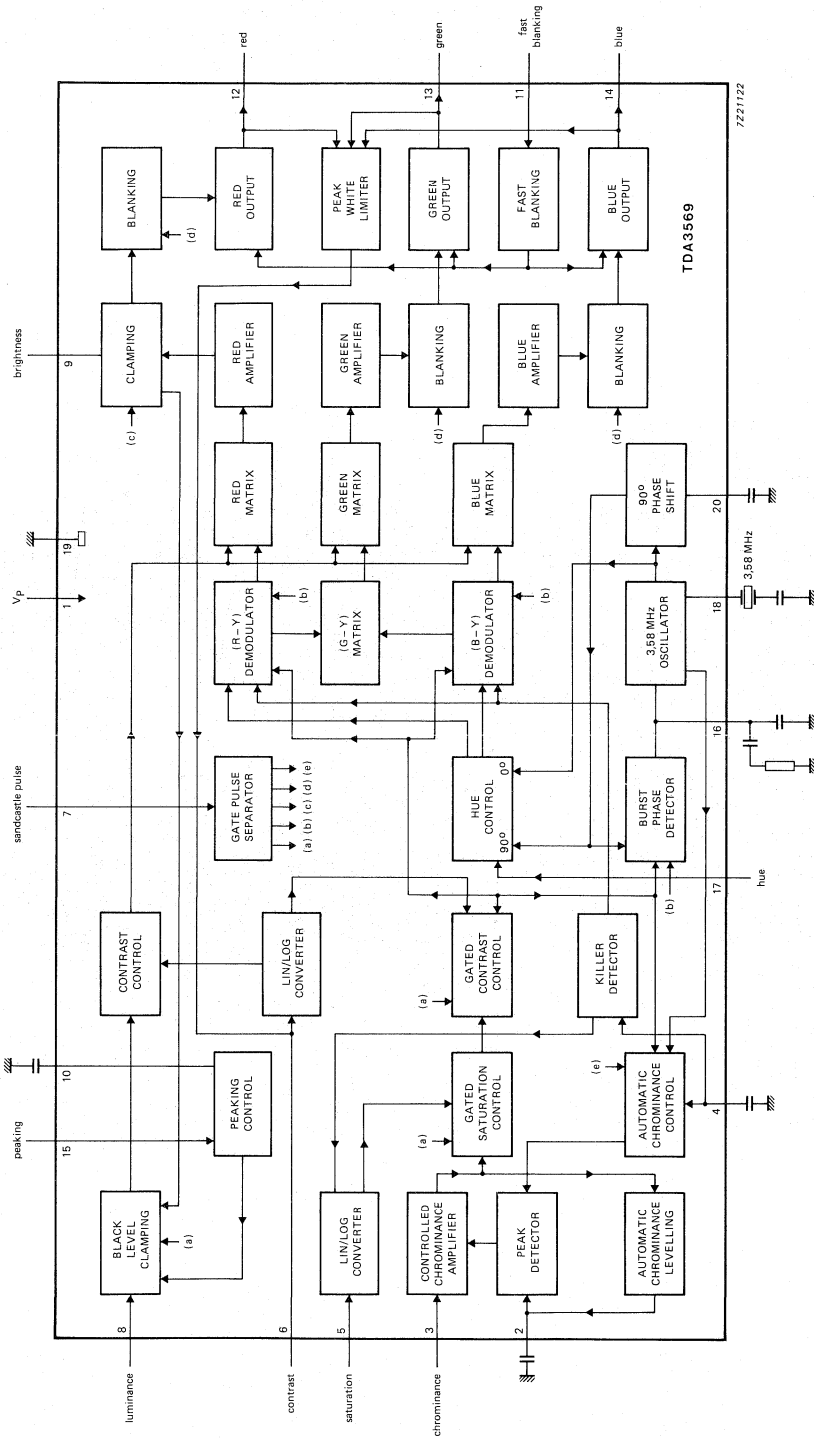


Fig. 1 Block diagram.

## FUNCTIONAL DESCRIPTION

### Luminance amplifier

The luminance amplifier is voltage driven and requires a positive video input signal of 450 mV peak-to-peak, a.c. coupled to pin 8. The coupling capacitor provides storage for the black level clamping circuit. After clamping the signal is fed to a peaking circuit in which the amount of overshoot is controlled from the voltage on pin 15.

The next stage controls luminance signal contrast. Adjusted by the voltage on pin 6, the contrast control range is nominally  $-17$  to  $+3$  dB. The curve is linear as shown in Fig. 2.

### Chrominance amplifier

The chrominance amplifier has an asymmetrical input and requires a.c. coupling to pin 3. The minimum peak-to-peak signal amplitude at the input is 55 mV (colour bar signal with 75% saturation; burst signal is 25 mV (peak-to-peak)). The gain control has a range greater than 30 dB but to avoid clipping, the input signal should not exceed 1,1 V (peak-to-peak).

After gain control, the chrominance signal is fed to an automatic chrominance levelling (ACL) circuit which avoids over-saturation when the incoming chrominance/burst ratio exceeds 2,2 : 1. The ACL circuit controls the chrominance amplitude via the automatic chrominance control (ACC) circuit.

The controlled chrominance signal is then fed to the saturation and contrast control stages. The chrominance and luminance contrast stages are directly coupled to ensure good tracking. Saturation is controlled via pin 5. This has a high impedance and a control range of 2 to 4 V, giving a linear saturation control greater than 50 dB. The burst signal is not affected by contrast or saturation controls.

After the amplification and control stages the chrominance signal is fed to the (R-Y) and (B-Y) demodulators, the burst phase detector and the ACC detector.

### Oscillator and ACC circuit

The 3,58 MHz reference oscillator operates at the subcarrier frequency. The crystal is connected between pin 18 and ground. The oscillator does not require adjustment due to the small spreads of the IC. To check the free running frequency of the oscillator the loop is opened by connecting the saturation control (pin 5) to the positive supply line. The oscillator has an internal gain-limiting stage which holds the gain at unity. This ensures internal signals remain sinusoidal thus preventing higher harmonics of subcarrier signals and allowing hue control to be obtained by mixing two signals with phases of  $0^\circ$  and  $90^\circ$ . The  $90^\circ$  phase shift is obtained via a Miller integrator and the bias capacitor for this is connected at pin 20.

The ACC detector compares the burst signal with the  $0^\circ$  reference signal. After detection, the ACC signal is fed via a peak detector to control the chrominance amplifier and to a sample-and-hold circuit to drive the colour killer circuit.

The reference signal for the burst phase detector is provided by the  $90^\circ$  phase-shifted signal. An RC network is used to obtain the required catching range and noise immunity for the output voltage of the burst phase detector.

The hue control is obtained by mixing the  $0^\circ$  and  $90^\circ$  oscillator signals before they are fed to the (R-Y) and (B-Y) demodulators. This means that the hue control reacts to control voltage changes without delay as it is not dependent on the PLL.

**FUNCTIONAL DESCRIPTION** (continued)**Demodulator circuits**

The demodulators are driven by the amplified and controlled chrominance signals, the reference signals being from the hue control circuit. With nominal hue control, the phase angle of the (R-Y) reference signal is  $0^\circ$  and that for the (B-Y) reference signal is  $90^\circ$ .

For flesh tone correction the demodulated (R-Y) signal is matrixed with the demodulated (B-Y) signal according to the following equations:

$$(R-Y)_{\text{matrixed}} = 1,61 (R-Y)_{\text{IN}} - 0,42 (B-Y)_{\text{IN}}$$

$$(G-Y)_{\text{matrixed}} = 0,43 (R-Y)_{\text{IN}} - 0,11 (B-Y)_{\text{IN}}$$

$$(B-Y)_{\text{matrixed}} = (B-Y)_{\text{IN}}$$

In these equations  $(R-Y)_{\text{IN}}$  and  $(B-Y)_{\text{IN}}$  indicate the colour difference signal amplitudes when the chrominance signal is demodulated with a phase difference of  $90^\circ$  between the R-Y and B-Y demodulators and gain ratio B-Y/R-Y = 1,78 : 1.

**RGB matrix and amplifier circuits**

The three matrix and amplifier circuits are identical. The luminance signal and the colour difference signals are added in the matrix circuit to obtain the colour signal.

Output signals are 5 V (peak-to-peak) (black-white) for the following nominal input signals and control settings.

- Luminance 450 mV (peak-to-peak)
- Chrominance 550 mV (peak-to-peak) (burst/chrominance ratio of the input = 1 : 2,2)
- Contrast -3 dB (maximum)
- Saturation -10 dB (maximum)

The maximum available output voltage is approximately 7 V (peak-to-peak).

The black level of the red channel is compared with a variable external reference level (pin 9) which provides the brightness control. The control loop is closed via the luminance input.

The luminance input is varied to control the black level, therefore the green and blue outputs follow any variation of the red output. The output of the black level control can be varied between 2 V and 4 V. The corresponding brightness control voltage is shown in Fig. 4.

If the output signal approaches the level of 9 V the peak-white limiter circuit becomes active and reduces the output signal via the contrast control.

**Blanking of RGB signals**

A slicing level of about 1,5 V is used for this blanking function, so that the wide part of the sandcastle pulse is separated from the rest of the pulse. During blanking a level of +2 V is available at the output.

The circuit also has a fast blanking input (pin 11) which blanks the RGB outputs within 50 ns.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage (pin 1)		$V_P = V_{1-19}$	—	13,2	V
Total power dissipation		$P_{tot}$	—	1,7	W
Storage temperature range		$T_{stg}$	-25	+150	°C
Operating ambient temperature range		$T_{amb}$	-25	+65	°C

**THERMAL RESISTANCE**

From junction to ambient

 $R_{thj-a}$  50 K/W**CHARACTERISTICS** $V_P = V_{1-19} = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; all voltages refer to pin 19; unless otherwise specified

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage (pin 1)		$V_P = V_1$	10,8	12	13,2	V
Supply current		$I_1$	—	65	—	mA
Total power dissipation		$P_{tot}$	—	0,75	—	W
<b>Luminance input signal</b>						
Input voltage (pin 8) (peak-to-peak value)	note 1	$V_{8(p-p)}$	—	450	—	mV
Input voltage level before clipping occurs in the input stage		$V_8$	—	—	1	V
Input current (pin 8)		$I_8$	—	0,15	1,0	μA
Contrast control range	see Fig. 2		—	-17 to +3	—	dB
Contrast control input current (pin 6)	$V_6 < 6\text{ V}$	$I_6$	—	0,5	15	μA
	peak white limiter active, $V_6 = 2,5\text{ V}$	$I_6$	—	5,5	—	mA
Input resistance (pin 6)	$V_6 > 6\text{ V}$	$R_6$	1,4	2,0	2,6	kΩ

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Peaking of luminance signal</b>						
Input impedance (pin 10)		$ Z_{10} $	—	10	—	$k\Omega$
Output impedance (pin 15)		$ Z_{15} $	—	75	—	$\Omega$
Ratio of internal/ external current	pin 15 short- circuit to ground		—	10	—	
<b>Chrominance amplifier</b>						
Input signal amplitude (peak-to-peak value) (pin 3)	note 2	$V_{3(p-p)}$	55	550	—	mV
Input signal amplitude before clipping occurs in the input stage (peak-to- peak value)		$V_{3(p-p)}$	—	—	1,1	V
Minimum burst signal amplitude within the ACC control range (peak-to-peak value)			35	—	—	mV
ACC control range			30	—	—	dB
Change of the colour signal at the output for the complete control range		$\Delta V$	—	—	+1	dB
Input impedance (pin 3)		$ Z_3 $	6	8	10	$k\Omega$
Input capacitance (pin 3)		$C_3$	—	4	6	pF
Saturation control range	see Fig. 3		50	—	—	dB
Saturation control input current (pin 5)	$V_5 < 6\text{ V}$	$I_5$	—	1	20	$\mu\text{A}$
Input impedance (pin 5)	$V_5 = 6\text{ to }10\text{ V}$ colour killer active	$ Z_5 $	1,4	2,0	2,6	$k\Omega$
	$V_5 > 10\text{ V}$	$ Z_5 $	1,4	2,0	2,6	$k\Omega$
		$ Z_5 $	0,7	1,0	1,3	$k\Omega$
Tracking between luminance and chrominance contrast	for 10 dB of control		—	1	2	dB



parameter	conditions	symbol	min.	typ.	max.	unit
<b>ACL circuit</b>						
Chrominance/burst ratio at which ACL commences	note 3		—	2,2	—	
<b>Reference part</b>						
<b>Phase-locked loop</b>						
Catching range		$\Delta f$	$\pm 400$	$\pm 500$	—	Hz
Phase shift for 400 Hz carrier frequency deviation		$\Delta \phi$	—	—	5	deg
<b>Oscillator</b>						
Temperature coefficient of oscillator frequency		$TC_{osc}$	—	1,5	2,5	Hz/K
Frequency deviation	$\Delta V_P = \pm 10\%$	$\Delta f_{osc}$	—	150	250	Hz
Input resistance (pin 18)		$R_{18}$	260	360	460	$\Omega$
Input capacitance (pin 18)		$C_{18}$	—	—	10	pF
<b>ACC generation</b>						
Voltage at pin 4 with nominal input signal		$V_4$	—	4,0	—	V
Voltage at pin 4 without burst input		$V_4$	—	1,9	—	V
Colour-off voltage (pin 4)		$V_4$	—	2,5	—	V
Colour-on voltage (pin 4)		$V_4$	—	2,8	—	V
Voltage at pin 2 with nominal input signal		$V_2$	4,5	5,0	5,5	V
<b>Hue control</b>						
Control voltage range	see Fig. 5					
Input current (pin 17)	$V_{17} < 5 V$	$I_{17}$	—	0,5	20	$\mu A$
Input impedance (pin 17)	$V_{15} > 5 V$	$ Z_{17} $	1,5	2,5	3,5	$k\Omega$
<b>Demodulation part</b>						
Demodulation signal ratios	note 4					
(R-Y)/(B-Y)	no (R-Y)	$V_{12}/V_{14}$	—	-0,42	—	
(R-Y)/(B-Y)	colour bar	$V_{12}/V_{14}$	—	1,4	—	
(G-Y)/(R-Y)	no (B-Y)	$V_{13}/V_{14}$	—	-0,25	—	
(G-Y)/(B-Y)	no (R-Y)	$V_{13}/V_{14}$	—	-0,11	—	
Frequency response	0 to 0,7 MHz		—	—	-3	dB

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>RGB matrix and amplifiers</b>						
Output signal amplitude (peak-to-peak value) (pins 12, 13 and 14)	with nominal luminance input and nominal contrast; note 5; black-white	$V_{12,13,14(p-p)}$	4,0	5,0	6,0	V
Output signal amplitude of the "blue" channel; (B-Y) signal (pin 14) (peak-to-peak value)	with nominal contrast and saturation; no luminance input	$V_{14(p-p)}$	—	3,8	—	V
Maximum peak-white level (pins 12, 13 and 14)	note 6	$V_{12,13,14}$	9,0	9,3	9,6	V
Maximum output current (pins 12, 13 and 14)	per pin	$I_{12,13,14}$	—	—	10	mA
Difference in black level between the three channels			—	—	600	mV
Black level shift with vision content			—	10	40	mV
Brightness control voltage range	see Fig. 4					
Brightness control input current (pin 9)		$-I_g$	—	—	50	$\mu A$
Black level variation with temperature		$\Delta V/\Delta T$	—	0,15	1,0	mV/K
Black level variation with contrast control		$\Delta V$	—	75	200	mV
Relative spread between the three output signals			—	—	10	%
Relative variation in black level between the three channels	during variations of contrast (10 dB), brightness ( $\pm 1$ V), and supply voltage ( $\pm 10\%$ )	$\Delta V$	—	0	20	mV
Differential drift of black level over a temperature range of 40 °C		$\Delta V$	—	0	20	mV
Blanking level at the RGB outputs		$V_{bl}$	1,95	2,15	2,35	V

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Tracking of output black levels with supply voltage		$\frac{\Delta V_{bl}}{V_{bl}} \times \frac{V_P}{\Delta V_P}$	1,0	1,05	1,1	
Signal-to-noise ratio of output signals	note 7	S/N	62	—	—	dB
Residual 3,58 MHz in RGB outputs (peak-to-peak value)		$V_{R(p-p)}$	—	50	75	mV
Residual 7,1 MHz and higher harmonics in the RGB outputs (peak-to-peak value)		$V_{R(p-p)}$	—	50	75	mV
RGB output impedances		$ Z_{10,11,12} $	—	—	50	$\Omega$
Frequency response of total luminance and RGB amplifier circuits	0 to 5 MHz		—	—	-3	dB
<b>Sandcastle input</b>						
Level at which RGB blanking is activated		$V_7$	1,0	1,5	2,0	V
Level at which burst gate clamping pulses are separated		$V_7$	6,5	7,0	7,5	V
Delay between black level clamping and burst gating pulse		$t_d$	300	375	450	ns
Input current (pin 7)	$V_7 = 0$ to 1 V	$I_7$	—	—	-1	mA
	$V_7 = 1$ to 8,5 V	$I_7$	—	-20	-40	$\mu A$
	$V_7 = 8,5$ to 12 V	$I_7$	—	—	2	mA
<b>Fast blanking</b>						
Level at which fast blanking is activated		$V_{11}$	—	2	—	V

**Notes to the characteristics**

1. Signal with negative going sync; amplitude includes sync pulse amplitude.
2. Signal amplitude indicated is for colour bar with 75% saturation, thus the chrominance/burst ratio is 2,2 : 1.
3. The ACL circuit limits the chrominance signal to a particular value as soon as the chrominance/burst ratio exceeds 2,2 : 1. Limiting is performed via the ACC function.
4. These matrixed values are found by measuring the ratio of the various output signals. The values are derived from the matrix equations given in the 'FUNCTIONAL DESCRIPTION'.
5. Nominal contrast is specified as maximum contrast  $-3$  dB; nominal saturation is specified as maximum saturation  $-10$  dB.
6. When this level is exceeded, the amplitude of the output signal is reduced with a discharge of the capacitor on pin 7 (contrast control), the discharge current is 5,5 mA.
7. The signal-to-noise ratio is specified as peak-to-peak signal amplitude with respect to the r.m.s. value of noise.

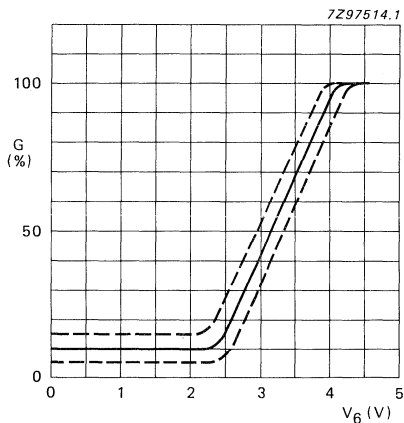


Fig. 2 Contrast control voltage range.

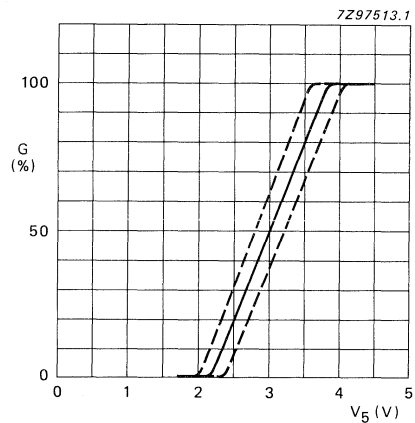


Fig. 3 Saturation control voltage range.

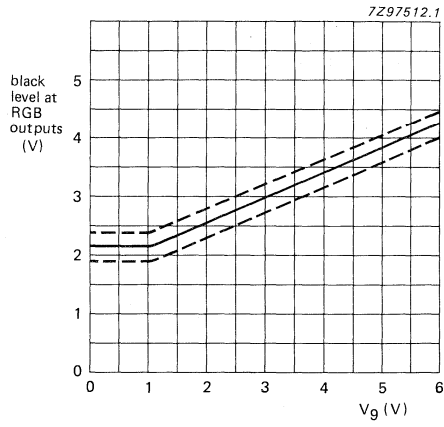


Fig. 4 Brightness control voltage range.

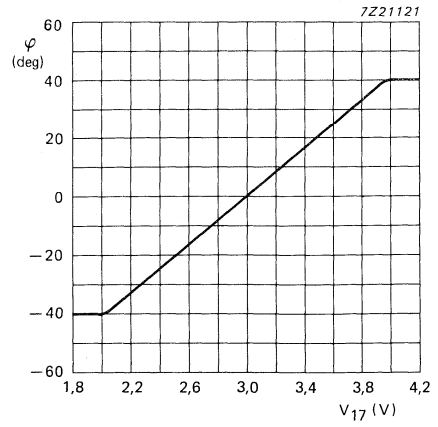


Fig. 5 Hue control voltage range.

DEVELOPMENT DATA



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3586

## HORIZONTAL AND VERTICAL SYNC PROCESSOR

### GENERAL DESCRIPTION

This synchronization circuit for colour TV receivers incorporates a voltage-controlled reference oscillator from which the horizontal/vertical synchronization is derived. Division of the reference frequency to obtain the horizontal and vertical frequencies is performed by triggered divider networks and phase relationships between the waveforms are maintained by phase-locked loops. Horizontal and vertical output driver stages are provided.

### Features

- Positive video input; capacitive coupling (source impedance  $< 200 \Omega$ )
- Adaptive sync separator; slicing level at 50% of sync amplitude
- Internal vertical pulse separator with double slope integrator
- Video identification and mute function
- Reference voltage-controlled oscillator operates with low-cost 503 kHz ceramic resonator (32 x horizontal frequency)
- Phase comparator 1 controls phasing between horizontal sync and horizontal scan: with no tv signal, or when in VCR mode, the loop gain is increased by 3-times for faster synchronization
- Phase comparator 2 controls phasing between horizontal flyback and horizontal scan
- Horizontal ramp generator
- Horizontal output driver with constant duty cycle
- Sandcastle pulse generator (three levels)
- Vertical timing logic and 50/60 Hz identification
- Vertical ramp generator with automatic amplitude compensation for 60 Hz mode
- Vertical output driver
- Open-collector vertical blanking output
- Pulse output for keyed a.g.c.
- Protection feature switches off the horizontal drive:  
during the next horizontal flyback;  
permanently after three transitory failures have been sensed;  
permanently when a constant failure condition is sensed.

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

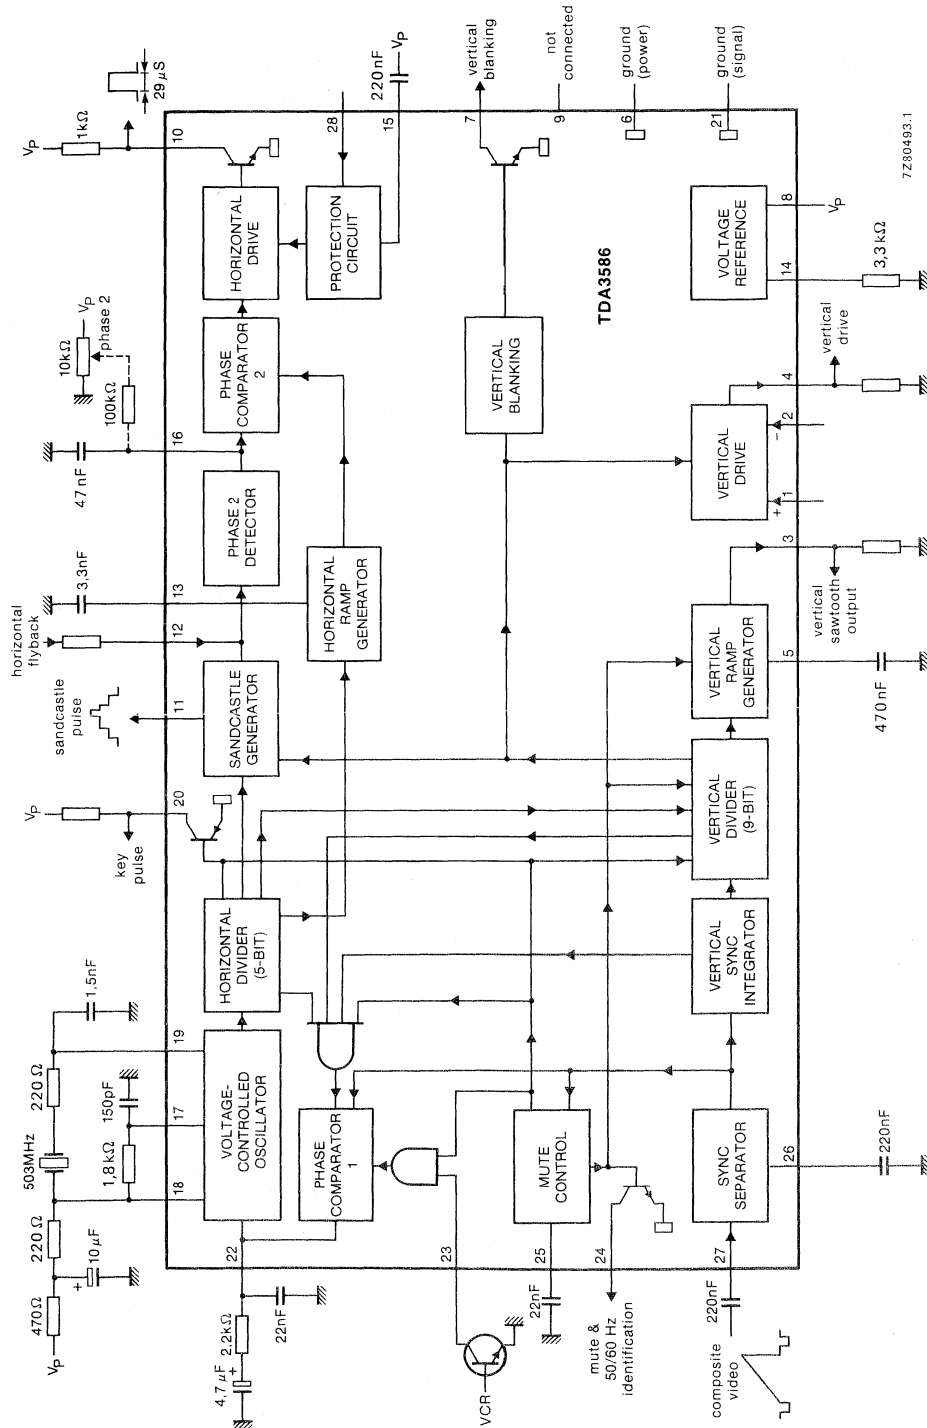


Fig. 1 Block diagram.



## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 8)	$V_P = V_{8-6/21}$	max.	13,2 V
Voltages at:			
pins 1 and 2	$V_{1-6/21}, V_{2-6/21}$		0 to $V_P$ V
pin 16	$V_{16-6/21}$		0 to $V_P$ V
pin 20	$V_{20-6/21}$	max.	$V_P$ V
pin 23	$V_{23-6/21}$		0 to $V_P$ V
pin 24	$V_{24-6/21}$		0 to $V_P$ V
pin 26	$V_{26-6/21}$		0 to 8 V
pin 27	$V_{27-6/21}$		1 to $V_P$ V
pin 28	$V_{28-6/21}$		0 to $V_P$ V
Currents at:			
pin 3	$-I_3$	max.	20 mA
pin 4	$I_4$		-200 to +10 mA
pin 7	$I_7$		-150 to +10 mA
pin 10	$I_{10}$		-10 to +150 mA
pin 11	$I_{11}$		-30 to +30 mA
pin 12	$I_{12}$		-10 to +10 mA
pin 20	$I_{20}$	max.	20 mA
pin 24	$I_{24}$		-5 to +20 mA
Total power dissipation	$P_{tot}$	max.	2 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

DEVELOPMENT DATA

## CHARACTERISTICS

 $V_P = V_{8-6/21} = 12$  V;  $T_{amb} = 25$  °C; as measured in Fig. 1; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Composite video and sync separator input (pin 27)</b>					
Positive video input signal; internal black level determination					
Standard signal (peak-to-peak value)	$V_{27(p-p)}$	0,2	1,0	3,0	V
Generator resistance	$R_G$	—	—	200	$\Omega$
Input current during sync	$-I_{27}$	—	40	—	$\mu$ A
Input current during video	$I_{27}$	—	5	—	$\mu$ A

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Composite sync generation (pin 26)</b>					
Horizontal slicing level at 50% of sync pulse amplitude { $V_{27-21}$ (p-p) < 1,5 V }					
Current during sync	$-I_{26}$	—	340	—	$\mu\text{A}$
Current during video	$I_{26}$	—	17	—	$\mu\text{A}$
<b>Internal vertical sync pulse generation</b>					
Vertical slicing level at 50% between black level and horizontal slicing level					
<b>Pulse for keyed a.g.c.</b> (pin 20, open collector)					
With no video input, pin 20 voltage is at high level					
Output current	$I_{20}$	—	—	5	mA
Saturation voltage at $I_{20} = 5$ mA	$V_{20-6}$	—	—	0,4	V
Width of key pulse (sync pulse is always inside the key pulse)		6,5	8,0	9,0	$\mu\text{s}$
<b>Voltage-controlled oscillator</b> (pins 17, 18 and 19).					
Operating voltage	$V_{18-6}$	5	—	13,2	V
Horizontal frequency control range:					
minimum frequency	$f_{H\text{min}}$	—	—	15,2	kHz*
maximum frequency	$f_{H\text{max}}$	16,1	—	—	kHz
<b>Phase comparator 1 (pin 22)</b>					
<i>Loop gain low</i>					
Output current	$I_{22}$ $-I_{22}$	0,35 0,35	0,5 0,5	0,65 0,65	mA mA
Transfer gain		—	1,2	—	kHz/ $\mu\text{s}$
<i>Loop gain high</i>					
Output current	$I_{22}$ $-I_{22}$	1 1	1,5 1,5	2 2	mA mA
Transfer gain		—	3,6	—	kHz/ $\mu\text{s}$
<b>VCR switching (pin 23)</b>					
VCR mode selected	$V_{23-6/21}$	—	< 1,5	—	V
VCR mode not selected	Pin 23	open circuit			
Input current ( $V_{23-21} = 0$ V)	$-I_{23}$	30	—	200	$\mu\text{A}$

\* For  $V_p = 11$  to 13 V;  $f = 503$  kHz;  $TK = 30 \cdot 10^{-6}/\text{K}$ .

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Video identification (pins 24 and 25)</b>					
Output saturation voltage at $I_{24} = 5$ mA without video signal	V <sub>24-6/21</sub>	—	—	1,5	V
Output voltage at $I_{24} = 2,5$ mA and 60 Hz video signal	V <sub>24-6/21</sub>	5	6	7	V
Output current with 50 Hz video signal	$I_{24}$	—	—	5	$\mu$ A
Charging current	$-I_{25}$	0,5	0,75	1,0	mA
Charge/discharge current ratio	$-25/+125$	—	3	—	
Threshold level for positively increasing voltage	V <sub>25-6/21</sub>	4,0	4,5	5,0	V
Hysteresis	$\Delta V_{25-6/21}$	250	—	550	mV
<b>Horizontal ramp generator</b>					
$C_{13} = 3,3$ nF; circuit in sync					
Sawtooth amplitude (peak-to-peak value)	V <sub>13(p-p)</sub>	—	2,7	—	V
Charging current	$-I_{13}$	132	155	178	$\mu$ A
Sawtooth starting level (Fig. 2)	V <sub>13-6/21</sub>	1,1	1,22	1,32	V
Dead time (Fig. 2)	$t_D$	5,8	6,0	7	$\mu$ s
<b>Sandcastle pulse generator (pin 11)</b>					
Voltage level for burst key at $-I_{11} = 0$ to 4 mA	V <sub>11-6/21</sub>	9,0	—	—	V
Voltage level for horizontal blanking at $\pm I_{11} = 0$ to 1 mA	V <sub>11-6/21</sub>	3,9	4,5	5,2	V
Voltage level for vertical blanking	V <sub>11-6/21</sub>	1,9	2,5	3,1	V
Delay between centre of sync pulse and leading edge of burst key pulse		2,15	—	3,15	$\mu$ s
Width of burst key pulse		3,7	4,0	5,0	$\mu$ s
Horizontal blanking time			flyback pulse		
Vertical blanking time (starting from reset of vertical divider)	$t_{11}$	—	21	—	lines
<b>Horizontal flyback input (pin 12)</b>					
Threshold for blanking	V <sub>12-6/21</sub>	0,1	0,3	0,5	V
Threshold for phase comparator 2	V <sub>12-6/21</sub>	2,5	3	3,5	V
<b>Phase comparator 2 (pin 16)</b>					
Charging current	$-I_{16}$	0,4	0,6	0,8	mA
Charge/discharge current ratio	$+I_{16}/-I_{16}$	0,95	—	1,05	
Delay between comparable edges of waveforms for phase comparators 1 and 2		1,5	2,0	2,5	$\mu$ s

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Horizontal drive output</b> (pin 10, open collector)					
Saturation voltage at $I_{10} = 20 \text{ mA}$	$V_{10-6/21}$	—	—	0,5	V
Horizontal drive pulse width (constant duty cycle; voltage level high during horizontal flyback)		26	28	30	$\mu\text{s}$
Phase comparator 2 delay range		14	16	17	$\mu\text{s}$
<b>Vertical divider logic (TV mode)</b>					
Timing of no-sync signal		315			lines
Timing of search window		247	—	359	lines
Timing of 50 Hz window		309	—	315	lines
Timing of 60 Hz window		255	—	267	lines
<b>Vertical divider logic (VCR mode)</b>					
Timing of no-sync signal		327			lines
Timing of search window		247	—	359	lines
Timing of 50 Hz window		299	—	327	lines
Timing of 60 Hz window		247	—	279	lines
<b>Vertical ramp generator (pin 5)</b>					
Internal current source	$-I_5$	65	80	95	$\mu\text{A}$
Additional current supplied when in 60 Hz mode	$-I_5$	15	20	25	$\mu\text{A}$
Discharge time at $C_5 = 470 \text{ nF}$		—	64	—	$\mu\text{s}$
<b>Vertical sawtooth output (pin 3)</b>					
Sawtooth starting level (Fig. 2)	$V_{3-6}$	1,0	1,26	1,4	V
Sawtooth starting level drift with temperature		—	—	1,5	%
Sawtooth amplitude (peak-to-peak value) at $I_3 = 10 \text{ mA}$	$V_{3(p-p)}$	—	3,3	—	V
<b>Vertical amplifier differential inputs</b> (pins 1 and 2)					
Input current	$I_1, I_2$	—	—	10	$\mu\text{A}$
Common mode range		2	—	8	V
<b>Vertical protection</b>					
Condition for continuous vertical blanking	$\Delta V_{1-21}$	—	—	35	mV

parameter	symbol	min.	typ.	max.	unit
<b>Vertical drive output (pin 4)</b>					
Output current	$-I_4$	—	—	80	mA
Voltage gain of vertical amplifier	$G_V$	160	—	600	
<b>Vertical blanking output (pin 7, open collector)</b>					
Saturation voltage at $I_7 = 15$ mA	$V_{7-6/21}$	—	—	0,5	V
Duration of vertical blanking and vertical protection		—	21	—	lines
<b>Protection circuit input (pin 28)</b>					
Condition for protection function active	$V_{28-6/21}$	—	—	< 1,15	V
Maximum thermal drift		—	—	1,5	%
Input current when $V_{28-6/21} = V_{14-6/21}$	$I_{28}$	—	—	3	$\mu$ A
Condition for protection function inactive	$V_{28-6/21}$	1,37	—	$V_S$	V
Normal operation of protection function (horizontal drive switched off during next horizontal flyback)	$V_{28-6/21}$	—	—	< $V_{14-6/21}$	V
<b>Protection circuit delay (pin 15)</b>					
Charging current	$-I_{15}$	70	—	130	$\mu$ A
Charge/discharge current ratio	$-I_{15}/+I_{15}$	0,8	—	1,2	
Charging time	$t_{15}$	3	4	5	$\mu$ s
Charge/discharge time ratio		1,6	2,0	—	
<b>Current reference input (pin 14)</b>					
External resistor (pin 14) = $3,32$ k $\Omega \pm 1\%$					
Voltage reference	$V_{14-6}$	1,18	1,26	1,35	V
Maximum thermal drift		—	—	1	%


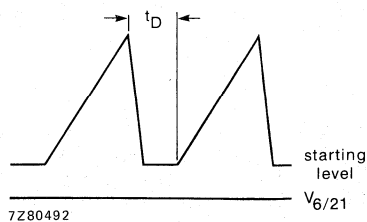


Fig. 2 Horizontal sawtooth waveform.

APPLICATION INFORMATION

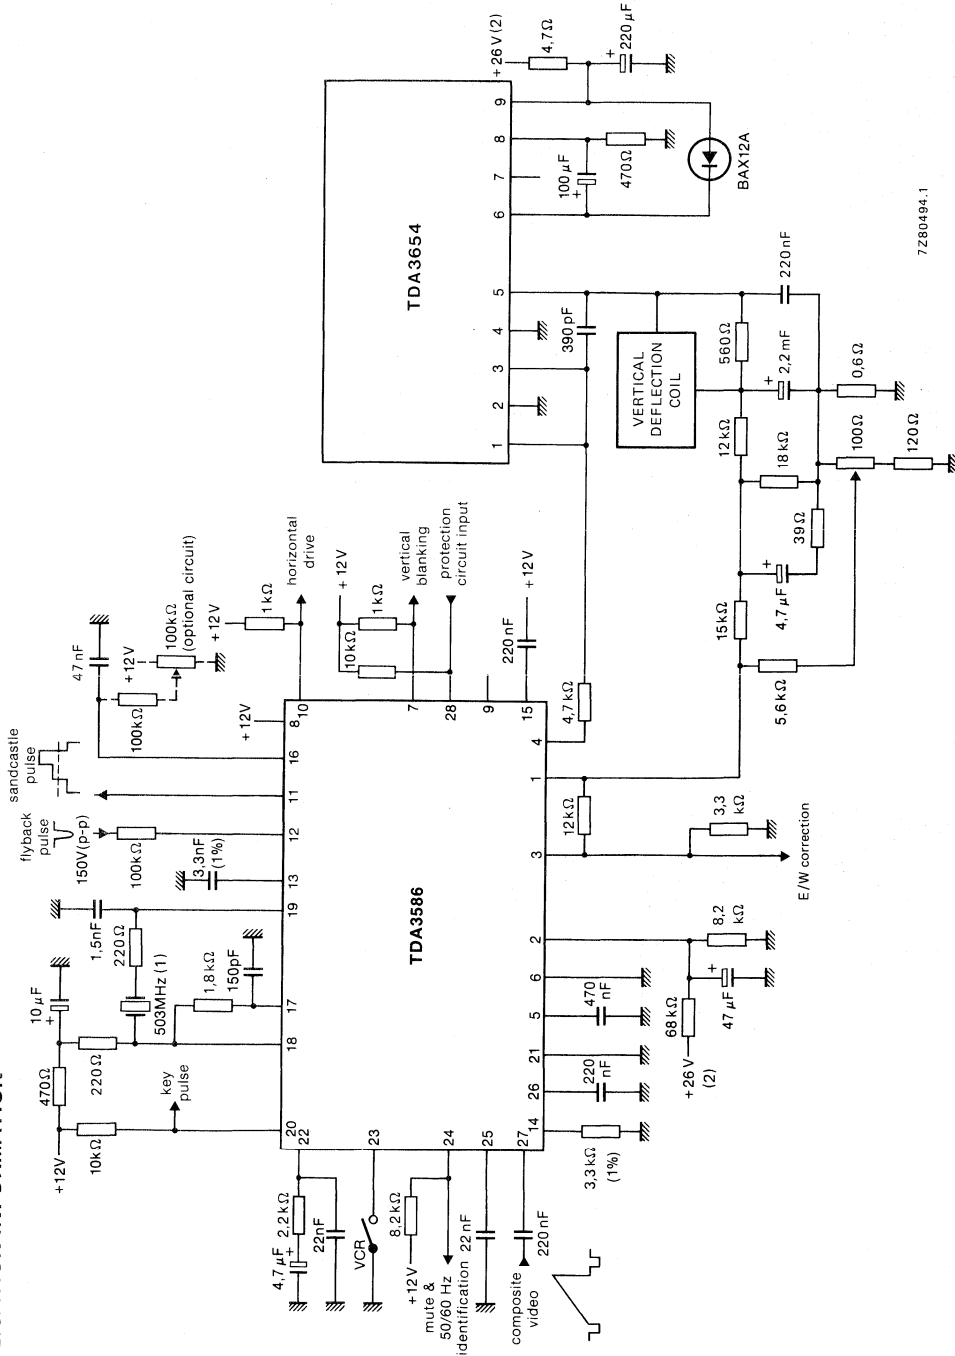

7280494.1

Fig. 3 Application for 110° deflection using TDA3586 in combination with vertical deflection circuit TDA3654.  
 (1) Ceramic resonator MURATA CSB503B.  
 (2) Unstabilized voltage from EHT transformer.

## SECAM PROCESSOR CIRCUIT

## GENERAL DESCRIPTION

The TDA3590A processor circuit converts SECAM signals into sequential phase-modulated (quasi-PAL) signals. It combines all the functions of the TDA3590, TDA3591 and TDA3591A to provide a complete SECAM processor system. The circuit is intended for use in conjunction with TDA3560, TDA3561, TDA3561A, TDA3562A or TDA3566 to provide SECAM/PAL/NTSC/black-and-white processor combinations.

## Features

- Limiter/amplifier for chrominance signal
- SECAM demodulator
- Clamp circuits and de-emphasis for colour difference signals
- Modulator to convert colour difference signals into sequential, phase-modulated signals
- Identification circuit for horizontal, vertical or combined horizontal and vertical SECAM identification
- Divider circuit to provide 4,4 MHz carrier from 8,8 MHz signals generated in TDA3560/61/61A/62A/66
- Sandcastle pulse detector
- SECAM switch and PAL matrix
- Video amplifier
- Pin compatibility with TDA3590, TDA3591 and TDA3591A when application requires SECAM ident priority (does not apply with PAL ident priority)

## QUICK REFERENCE DATA

Supply voltage	$V_P = V_{17-2}$	typ.	12 V
Supply current	$I_P = I_{17}$	typ.	100 mA
<b>Chrominance amplifier and demodulator</b>			
Input signal PAL (peak-to-peak value)	$V_{4-2(p-p)}$	typ.	550 mV
Input signal SECAM (peak-to-peak value)	$V_{4-2(p-p)}$	typ.	100 mV
Output signal PAL (peak-to-peak value)			
at $V_{16(p-p)} = 1,2$ V	$V_{8-2(p-p)}$	typ.	900 mV
Output signal SECAM (peak-to-peak value)	$V_{8-2(p-p)}$	typ.	500 mV
<b>Identification</b>			
Input voltage range for horizontal identification (pin 5)	$V_{5-2}$		0 to 8 V
Input voltage range for vertical identification (pin 5)	$V_{5-2}$		10,5 to 12,0 V
Voltage at pin 6 for PAL	$V_{6-2}$	typ.	10,2 V
Voltage at pin 6 for SECAM	$V_{6-2}$	typ.	7,0 V
<b>Sandcastle pulse detector</b>			
Vertical blanking level	$V_{19-2}$	typ.	1,5 V
Horizontal blanking level	$V_{19-2}$	typ.	3,5 V
Burst gating level	$V_{19-2}$	typ.	7,2 V
<b>Luminance amplifier</b>			
Luminance input signal (peak-to-peak value)	$V_{16-2(p-p)}$	typ.	1,2 V
Luminance output signal (peak-to-peak value)	$V_{15-2(p-p)}$	typ.	3,0 V
<b>PAL matrix and SECAM switch</b>			
Burst signal amplitude (peak-to-peak value)	$V_{11}; 12-2(p-p)$	typ.	60 mV
Amplification for PAL		typ.	0,5 dB
Amplification for SECAM		typ.	6 dB

## PACKAGE OUTLINE

24-lead DIL; plastic (with internal heat spreader) (SOT-101B).

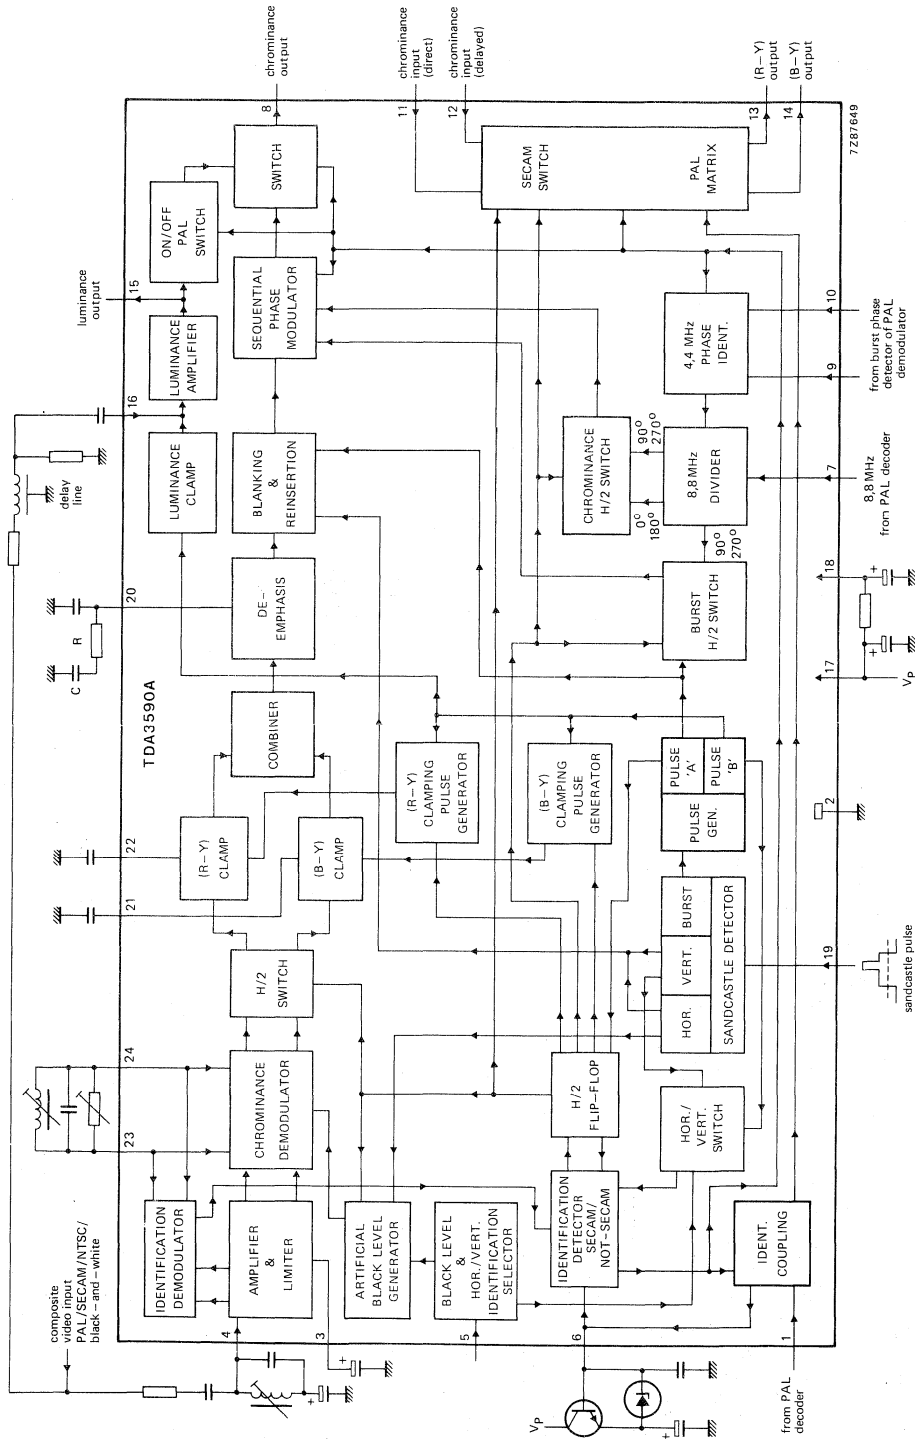


Fig. 1 Block diagram.



## PINNING

1. Identification coupling input for PAL/not-PAL identification using half the saturation voltage of the PAL decoder.
2. Ground.
3. Limiter feedback.
4. SECAM video input.
5. Identification selection input using a d.c. level to preset the identification mode of horizontal/vertical detection + black level clamping/insertion.
6. Storage circuit input to SECAM/not-SECAM identification detector.
7. Divider circuit input of 8,8 MHz from the PAL decoder.
8. Chrominance signal output comprising PAL or processed SECAM (quasi-PAL).
9. Carrier signal phase identification input from the burst phase detector of the PAL decoder.
10. As for pin 9.
11. Direct chrominance input to SECAM switch/PAL matrix.
12. Delayed chrominance input to SECAM switch/PAL matrix.
13. Colour difference output (R-Y).
14. Colour difference output (B-Y).
15. Luminance output.
16. Luminance/PAL input.
17. Positive supply voltage ( $V_p$ ).
18. Decoupled positive supply voltage.
19. Three-level sandcastle pulse input.
20. De-emphasis circuit connection.
21. Storage capacitor connection for (B-Y) clamp.
22. Storage capacitor connection for (R-Y) clamp.
23. Connection for reference tuned circuit for SECAM chrominance and identification demodulators.
24. As for pin 23.

## FUNCTIONAL DESCRIPTION

### Demodulation

The chrominance and identification demodulators of the TDA3590A both share the same reference tuned circuit (pins 23 and 24). The identification circuit automatically detects whether the incoming signal is SECAM or not-SECAM.

When the incoming signals are not-SECAM (PAL/NTSC/black-and-white) they are diverted via pin 16 to the chrominance output at pin 8 and no signal demodulation takes place. The delay line connected to pin 16 delays the signals to equalize the delay of the SECAM processor circuitry. When SECAM signals are received the PAL signal path is switched off.

Incoming SECAM signals are applied to pin 4 via an external bell filter. The signals are amplified, limited and then demodulated. The limiters give optimum i.f. interference suppression. Only one demodulator is necessary as the colour difference signals are available sequentially. After demodulation the colour difference signals are separated by an H/2 switch and then applied to (R-Y) and (B-Y) clamp circuits where the black levels are clamped to the same d.c. level. The optimum black level can be obtained at the end of the horizontal burst, so the timing of the (R-Y) and (B-Y) clamp is determined by the last 1,45  $\mu$ s of the burst gate pulse.

The two colour difference signals are combined again after clamping and then applied to the modulator via de-emphasis, blanking and reinsertion circuits.

The ratio of (R-Y) to (B-Y) at the de-emphasis output (pin 20) is 1,78. The external de-emphasis components of  $R = 1 \text{ k}\Omega$  and  $C = 470 \text{ pF}$  give a spread at the internal de-emphasis network  $< 20\%$ .

## FUNCTIONAL DESCRIPTION (continued)

If artificial black level reinsertion is required the burst gating pulse (Fig. 2) is used to time black level clamping. Artificial black levels are inserted during the horizontal blanking period when  $V_{5-2} > 2 \text{ V}$ . The clamp circuits then react to the artificial levels instead of the demodulated burst signals (this is necessary when no horizontal burst signals are available). The inserted signals may not be identical to the demodulated signals because of circuitry spread but this can be corrected by detuning the demodulator reference tuned circuit.

### Modulation

A burst signal is reinserted into the combined SECAM signal at the input to the sequential phase modulator. The nominal duration of this burst is  $2,85 \mu\text{s}$  which approximates to the duration of the PAL burst and, in combination with the horizontal blanking pulse (used as keying pulse in the SECAM switch), minimizes interference in the a.c.c. loop of the TDA3560/61/62.

At the input to the modulator the (R-Y) and (B-Y) signals have a positive phase position for magenta colour. The modulation carriers for the (R-Y) and (B-Y) signals are  $90^\circ$  out of phase; the burst is modulated in the + (R-Y) direction and is only present during an (R-Y) line, the modulated (R-Y) component has the same phase position as the (R-Y) burst for magenta colour.

The chrominance output from pin 8, in the SECAM mode, is a quasi-PAL signal with alternate line, sequential modulation. Odd and even harmonics of the 4,4 MHz carrier introduced by the modulator are suppressed by internal filters. A correction is made to the burst-chrominance ratio of the quasi-PAL signals for equal saturation of PAL and SECAM signals.

### Identification

Identification of the SECAM signal is performed using the fact that only SECAM has a line-to-line difference in demodulated voltage level. This is detected during the last  $1,5 \mu\text{s}$  of the burst gate pulse. A flip-flop, which is switched by the leading edge of the sandcastle time blanking pulse, provides the reference input to the identification detector. Here the phase of the flip-flop is compared with that of the changing voltage levels from the demodulator. The SECAM identification circuits operate when selected by the voltage on pin 5; this may be horizontal, vertical or combined horizontal and vertical identification, depending on the switching arrangements of pin 5. An internal voltage divider presets pin 5 to 6 V to give automatic selection of horizontal identification plus black level re-insertion. Vertical identification is selected by taking the voltage on pin 5 above 10,5 V, then the system compares the demodulator output voltage only during line scanning of the vertical blanking.

Information obtained from the identification detector is also used for colour killing and, if required, for switching to PAL.

### Luminance amplification

The luminance amplifier input at pin 16 can be up to 1,2 V (peak-to-peak value) which equates to a peak-to-peak voltage of 2,7 V  $-7 \text{ dB}$ . The amplifier gain is typically 8 dB. The luminance clamping circuit is activated during the SECAM identification timing (see Fig. 2).

### Sandcastle pulse detection

The sandcastle pulse detector requires a three-level sandcastle pulse to provide horizontal blanking, vertical blanking and burst gate pulses. The detected burst gate pulse triggers a pulse generator which produces two timing pulses, pulse 'A' and pulse 'B' (see Fig. 2). Pulse 'A' is used to time the PAL burst modulator. Pulse 'B' provides the timing of the (R-Y) clamp (present only during a red line); the (B-Y) clamp (present only during a blue line); the luminance clamp (present every line); and the SECAM horizontal identification circuit.

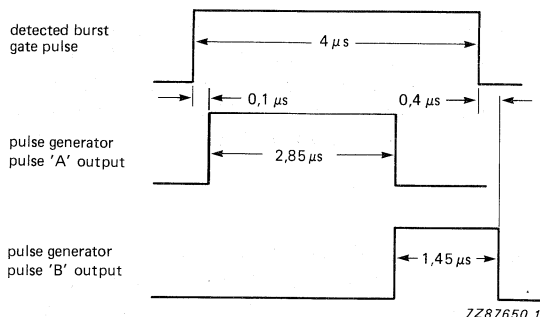


Fig. 2 Burst gate timing pulse generation.

### PAL matrix and SECAM switch

The PAL matrix and SECAM switch is included in the TDA3590A to facilitate handling of the two chrominance signal types, PAL and SECAM. For PAL, the direct chrominance signal and the chrominance signal delayed by the PAL delay line are used by the PAL matrix to separate the two colour difference signals. Phase accuracy is not critical for this operation as the colour difference signals are not mixed. For SECAM, the quasi-PAL sequential colour difference signals are separated by switching. The gain of the switching circuit is two times that for normal PAL reception to maintain signal balance between the two systems. The (B-Y) output from the SECAM switch is a signal with no burst; the (R-Y) output has a burst modulated in the + (R-Y) direction during the + (R-Y) line. There is minimal crosstalk between the colour difference signals in the SECAM switch.

### Carrier generation

The carrier for the sequential phase modulator is obtained using the 8,8 MHz input from the PAL decoder. This input is divided by two to provide two 4,4 MHz signals with a phase relationship of  $90^\circ$ . Correct phasing between the 4,4 MHz and the PAL decoder is ensured by the 4,4 MHz phase identifier circuit which resets the divider if the phasing is wrong (see Figs 3 and 4 for inter-connections). The inputs/outputs to the phase identifier have internal current sources in the case of SECAM.

### Coupling of identification systems

Coupling of system identification between TDA3590A and a PAL decoder is performed using the functions of pins 1 and 6. The voltage level at pin 1 is controlled by the PAL/not-PAL detection of the PAL decoder; the voltage level at pin 6 is a function of SECAM/not-SECAM detection of the TDA3590A modified by the action of pin 6 external circuit.

The circuit action is as follows and is summarized in Table 1.

Channel switching	During channel switching pin 6 is taken rapidly to a high voltage ( $\pm 10,2 \text{ V}$ ) by the external circuit. This corresponds to the not-SECAM mode of the TDA3590A.
PAL	The high voltage level at pin 6 caused by channel switching is maintained by the TDA3590A when it recognizes the signal as not-SECAM. An internal current source keeps pin 6 voltage high, locking the TDA3590A in the not-SECAM mode. This condition is maintained even if reflected PAL signals are present. The PAL decoder recognizes the signal as PAL and takes pin 1 of TDA3590A to a voltage of between 0,5 and 2,6 V, depending on the setting of the saturation voltage. The system is thus locked in the PAL mode.

**FUNCTIONAL DESCRIPTION** (continued)

SECAM	The initial high voltage level ( $\pm 10,2$ V) at pin 6 caused by channel switching sets the TDA3590A in the not-SECAM mode and during this time the PAL decoder detects a not-PAL signal. This causes a voltage at pin 1 of $< 0,4$ V which prevents the internal current source of TDA3590A maintaining the high voltage level of pin 6 which, in turn, allows the TDA3590A to detect SECAM. The initiation of SECAM detection is delayed by the action of pin 6 external circuit and commences when pin 6 approaches 9,1 V. The SECAM signals are converted by TDA3590A to quasi-PAL signals at pin 8 which are detected by the PAL decoder as PAL signals. The resulting modes of operation are SECAM for the TDA3590A and PAL for the PAL decoder, together giving a system operation in the SECAM mode.
Black-and-white	The TDA3590A is initially set in the not-SECAM mode as previously described. The PAL decoder detects not-PAL and the TDA3590A detects not-SECAM which results in a system operation in the colour-killing mode.

**Table 1** System operating modes

TDA3590A mode	PAL decoder mode	system operating mode
SECAM	PAL	SECAM
SECAM	not-PAL	condition not used
not-SECAM	PAL	PAL
not-SECAM	not-PAL	black-and-white

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 17)	$V_P = V_{17-2}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,88 W
Operating ambient temperature range	$T_{amb}$		-25 to + 65 °C
Storage temperature range	$T_{stg}$		-25 to + 150 °C

## CHARACTERISTICS

$V_P = V_{17-2} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified. The parameter values are valid only when the reference tuned circuit has been aligned as detailed in note 1.

parameter	symbol	min.	typ.	max.	unit
<b>Supplies</b>					
Supply voltage range (pin 17)	$V_{17-2}$	10,8	12,0	13,2	V
Supply current (pin 17)	$I_{17}$	—	100	—	mA
Input current (pin 18)	$I_{18}$	—	—	170	$\mu\text{A}$
Total power dissipation	$P_{\text{tot}}$	—	1,2	—	W
<b>Chrominance amplifier and demodulator</b>					
Input signal PAL (peak-to-peak value)	$V_{4-2(\text{p-p})}$	—	—	1,1	V
Input signal SECAM (peak-to-peak value)	$V_{4-2(\text{p-p})}$	15	100	300	mV
Input resistance (pin 4)	$R_{4-2}$	—	10	—	$\text{k}\Omega$
Input capacitance (pin 4)	$C_{4-2}$	—	—	5	pF
(R-Y)/(B-Y) ratio before modulation (pin 20)		—	1,78	—	
Relative black level deviation of colour difference signals before modulation (note 2)					
Output signal PAL (peak-to-peak value) at $V_{16(\text{p-p})} = 1,2 \text{ V}$	$V_{8-2(\text{p-p})}$	—	900	—	mV
Output signal SECAM (peak-to-peak value)	$V_{8-2(\text{p-p})}$	—	500	—	mV
Output impedance	$ Z_{8-2} $	—	50	—	$\Omega$
Input voltage for clamping on back porch of colour difference signals	$V_{5-2}$	—	—	0,5	V
Input voltage for artificial black level insertion after demodulation	$V_{5-2}$	2	—	—	V
Input resistance between pins 23 and 24	$R_{23-24}$	—	4	—	$\text{k}\Omega$
Input capacitance between pins 23 and 24	$C_{23-24}$	—	15	—	pF
Linearity of (B-Y) signal (pin 8) (note 3)		85	92	—	%
Linearity of (R-Y) signal (pin 8) (note 4)		93	100	—	%
Input resistance (pin 5)	$R_{5-2}$	—	10	—	$\text{k}\Omega$
Chrominance demodulator zero point stability (pin 20) (note 5)	$f_0$	—	5	—	kHz
Offset (B-Y) black level (pin 8) at $f_0$ clamping; $f_{\text{offset}} = 4,4 \text{ MHz}$		—	-15	—	kHz
Offset (R-Y) black level (pin 8) at $f_0$ clamping; $f_{\text{offset}} = 4,4 \text{ MHz}$		—	-25	—	kHz

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Identification SECAM/not-SECAM</b>					
Input voltage range for horizontal identification (pin 5)	V <sub>5-2</sub>	0	—	8	V
Input voltage range for vertical identification (pin 5)	V <sub>5-2</sub>	10,5	—	V <sub>p</sub>	V
Voltage at pin 6 for PAL	V <sub>6-2</sub>	—	10,2	—	V
Voltage at pin 6 for SECAM	V <sub>6-2</sub>	—	7,0	—	V
Identification ON for SECAM	V <sub>6-2</sub>	—	10,6	—	V
Colour OFF for SECAM	V <sub>6-2</sub>	—	9,7	—	V
Colour ON for SECAM	V <sub>6-2</sub>	—	9,0	—	V
Voltage at pins 9 and 10 for SECAM	V <sub>9-2; 10-12</sub>	—	10,5	—	V
Voltage between pins 9 and 10 for SECAM	V <sub>9-10</sub>	—	—	3	mV
Permissible voltage range at pins 9 and 10 for PAL	V <sub>9-2; 10-2</sub>	6,8	—	10,2	V
<b>Sandcastle pulse detector and clamping pulse generator</b>					
Voltage level at which the vertical blanking pulse is separated	V <sub>19-2</sub>	1,0	1,5	2,0	V
required pulse amplitude (peak-to-peak value)	V <sub>19-2(p-p)</sub>	2,1	—	2,9	V
Voltage level at which the horizontal blanking pulse is separated	V <sub>19-2</sub>	3,0	3,5	4,0	V
required pulse amplitude (peak-to-peak value)	V <sub>19-2(p-p)</sub>	4,1	—	6,6	V
Voltage level at which the burst gating pulse is separated	V <sub>19-2</sub>	6,7	7,2	7,7	V
required pulse amplitude (peak-to-peak value)	V <sub>19-2(p-p)</sub>	7,8	—	V <sub>p</sub>	V
Input current at V <sub>19-2</sub> = 7 V	I <sub>19</sub>	—	—	40	μA
<b>Carrier generator (note 6)</b>					
Input signal from TDA3560/61/61A/62A/66 (peak-to-peak value)	V <sub>7-2(p-p)</sub>	150	—	—	mV
Input resistance	R <sub>7-2</sub>	—	4	—	kΩ
Input capacitance	C <sub>7-2</sub>	—	5	—	pF

parameter	symbol	min.	typ.	max.	unit
<b>Luminance amplifier</b>					
Input signal (peak-to-peak value)	$V_{16-2(p-p)}$	—	1,2	1,7	V
Chrominance input signal when no luminance information is present (peak-to-peak value)	$V_{16-2(p-p)}$	—	—	1	V
Gain (pin 16 to 15) at $f_{16} = 4,4$ MHz	$G_{16-15}$	—	8	—	dB
Input current (pin 16)	$I_{16}$	—	—	1	$\mu A$
Input resistance during clamping (pin 16)	$R_{16-2}$	—	2,9	—	k $\Omega$
Output impedance (pin 15) at $I_{15} = 2$ mA	$ Z_{15-2} $	—	20	—	$\Omega$
Frequency response at $-3$ dB (pin 16 to 15)	f	6	—	—	MHz
Gain (pin 16 to 8) at $f_{16} = 4,4$ MHz; not-SECAM condition	$G_{16-8}$	—	7	—	dB
Frequency response at $-3$ dB (pin 16 to 8) not-SECAM condition	f	—	5	—	MHz
<b>PAL matrix and SECAM switch</b>					
Burst signal amplitude (peak-to-peak value)	$V_{11; 12(p-p)}$	—	60	—	mV
Input resistance	$R_{11; 12-2}$	—	900	—	$\Omega$
Input capacitance	$C_{11; 12-2}$	—	3	—	pF
Amplification for PAL	A	—	0,5	—	dB
Amplification for SECAM	A	—	6	—	dB
Difference in amplification from inputs to one output for PAL	$\Delta A$	—	—	0,5	dB
Line-to-line phase error in (R-Y) output for zero error in (B-Y) output for PAL		—	—	3,5	deg
Output impedance	$ Z_{13; 14-2} $	—	50	—	$\Omega$
<b>Identification PAL/not-PAL</b>					
Input condition for PAL (pin 1)	$V_{1-2}$	0,8	—	2,1	V
Input conditions for not-PAL (pin 1): lower voltage level	$V_{1-2}$	—	—	<0,4	V
upper voltage level	$V_{1-2}$	>2,6	—	$V_P$	V

**Notes to the characteristics**

1. The parameter values given in the characteristics are valid only when the following alignment procedure is performed:
  - a. Supply a SECAM signal input to pin 4 at 100 mV (peak-to-peak value) without deviation during a red and blue line (SECAM black colour information).
  - b. Align the reference tuned circuit so that the output signal from pin 8 to the PAL decoder is minimum during scan (PAL black colour information).
2. When an artificial black level is inserted after demodulation the resulting black level deviation depends on the adjustment of the demodulator tuned circuit. It is therefore possible to obtain a value of 0%.
3. (B-Y) linearity is defined by  $V_{\text{out(yellow)}}/V_{\text{out(blue)}}$  where  $f_{\text{yellow}} = (\text{typ.}) 4,02 \text{ MHz}$ ;  $f_{\text{blue}} = (\text{typ.}) 4,48 \text{ MHz}$ ;  $V_{5-2} = 2,0 \text{ V}$ .
4. (R-Y) linearity is defined by  $V_{\text{out(cyan)}}/V_{\text{out(red)}}$  where  $f_{\text{cyan}} = (\text{typ.}) 4,68 \text{ MHz}$ ;  $f_{\text{red}} = (\text{typ.}) 4,12 \text{ MHz}$ ;  $V_{5-2} = 2,0 \text{ V}$ .
5. When the input signal to the limiter (pin 4) changes from 300 to 15 mV (peak-to-peak value) the zero point of the chrominance demodulator shifts by a typical value of 5 kHz.
6. The phase delay between the oscillator output of TDA3560/61/61A/62A/66 and the input to TDA3590A pin 7 must be adjusted for minimum burst amplitude at pin 28 of the PAL decoder.

**APPLICATION INFORMATION**

The pin-to-pin functions of the application shown in Fig. 3 are described against the corresponding pin numbers.

**Pin 4. Chrominance input**

Typical input signal values (peak-to-peak) are: SECAM 100 mV; PAL 0,55 V. The input signal, which should be free from any sound modulation, is applied single-ended to pin 4 via a filter which has the bell-shaped bandpass required for SECAM signals.

**Pin 5. Horizontal/vertical identification**

Selection of horizontal or vertical identification depends on the external voltage applied to pin 5. When the d.c. level on pin 5 changes with time (pulse information) a combination of horizontal and vertical identification is possible.

*Horizontal identification*

When the voltage at pin 5 is  $< 0,5 \text{ V}$  horizontal identification and black level clamping occur. The clamping is during the back porch of the colour difference signals. If artificial black level insertion is required the voltage at pin 5 should be between 2 and 8 V.

*Vertical identification*

When the voltage on pin 5 is  $> 10,5 \text{ V}$  vertical identification occurs (identification on 9 lines in the vertical blanking period). In this mode the black level is artificially inserted after demodulation.

**Pin 6. System identification**

During PAL reception the typical voltage at pin 6 is 10,2 V. This causes the luminance stage to be connected internally to the chrominance output at pin 8 and also activates the PAL matrix for normal PAL signals. During SECAM reception the typical voltage at pin 6 is 7 V. This changes the internal connection of the output from the luminance stage to the sequential phase modulator and enables the SECAM switch. Noisy SECAM signals cause the voltage at pin 6 to increase, colour killing occurs at 9,8 V and colour is reinstated at 9,1 V.



**Pin 7. Carrier generation**

An 8,8 MHz signal from the PAL decoder is applied via pin 7 to the divider circuit in the TDA3590A. From this two 4,4 MHz signals are obtained with a phase shift of  $90^\circ$  with respect to each other. These signals are applied to the modulator via an H/2 switch. The delay of the 8,8 MHz input must be adjusted for minimum burst amplitude of the chrominance signal at pin 28 of the PAL decoder. With this condition the burst generated by the TDA3590A is in phase with the (R-Y) reference signal for the PAL decoder demodulator (the a.c.c. of the PAL decoder operates in the + (R-Y) direction).

**Pin 8. Chrominance output**

During PAL reception this output is connected internally to the luminance stage and a composite PAL video signal is present at pin 8. During SECAM reception the sequential phase modulator is connected to this output to give a quasi-PAL signal from pin 8. Typical peak-to-peak amplitudes of the signal from pin 8 are 900 mV for PAL (with peak-to-peak input at pin 16 of 1,2 V) and 500 mV for SECAM. The output signals are applied via a chrominance bandpass filter to the chrominance a.c.c. amplifier input of the PAL decoder.

**Pins 9 and 10. Divider resetting**

The output of the PAL decoder burst phase detector is connected to pins 9 and 10 of TDA3590A. During SECAM reception this signal carries differential a.c. current information about the phase relationship of the 4,4 MHz dividers of both ICs. The TDA3590A generates a minimum relative voltage between pins 9 and 10 at an absolute voltage level of 10,5 V. This overrules the PAL decoder oscillator control function causing the oscillator to run at  $2 \times 4,43$  MHz.

**Pins 11, 12, 13 and 14. SECAM switch and PAL matrix**

The PAL matrix circuit is enabled by system identification of PAL reception. The signal inputs to the matrix are the (direct) a.c.c. composite video output from the PAL decoder via an attenuator to pin 11 and a delayed version of the same signal via a glass delay line to pin 12. Active matrixing takes place in the IC and the separated (R-Y) and (B-Y) signals are available at pins 13 and 14 respectively.

The SECAM switch circuit is selected by system identification of SECAM reception. The inputs to the SECAM switch are the sequentially modulated quasi-PAL signals, direct and delayed, to pins 11 and 12 respectively. The SECAM switch separates the (R-Y) and (B-Y) signals which are then available at pins 13 and 14 respectively.

**Pins 15 and 16. Luminance signals**

The maximum peak-to-peak amplitude of the input to pin 16 should be 1,7 V. The relatively high input impedance of the luminance amplifier allows a 22 nF coupling capacitor to be used. The luminance amplifier has internal input clamping and a gain of 8 dB. The output is available at pin 15.

During SECAM reception the luminance signal is delayed approximately 470 ns by an external delay line to equalize the SECAM processing delay. The luminance and chrominance outputs are then correctly timed.

During PAL reception the PAL composite video signal passes through the external delay line and, after amplification, is available at pins 15 and 8.

**APPLICATION INFORMATION (continued)****Pins 17 and 18. Supply voltage (+ 12 V)**

Correct operation is ensured within the supply voltage range of 10,8 to 13,2 V. The typical power dissipation of the IC at 12 V is 1,2 W.

Pins 17 and 18 are separated by an external RC filter. Pin 18 supplies all the output stages and the biasing for several current sinks in the IC. Separation of the supply voltages minimizes crosstalk between the various parts of the IC. The capacitor at pin 18 must be small ( $\approx 1 \mu\text{F}$ ) to avoid the possibility of internal damage to the IC by discharge current should pin 17 be short-circuited to ground.

**Pin 19. Sandcastle pulse**

The required three-level sandcastle pulse may be coupled directly to the sandcastle pulse detector input at pin 19. The horizontal blanking, vertical blanking and burst gate pulses are separated by the IC.

**Pin 20. De-emphasis**


De-emphasis is performed at this pin with a  $1 \text{ k}\Omega$  resistor and a  $470 \text{ pF}$  capacitor. Additional filtering of the 8,8 MHz signal using an  $82 \text{ pF}$  coupling capacitor prevents moiré patterns appearing on the screen.

**Pins 21 and 22. Clamping of (R-Y) and (B-Y) signals**

Clamping of the colour difference signals is performed after they have been separated. The normal value for the clamping storage capacitors is  $100 \text{ nF}$  but this may be increased to  $470 \text{ nF}$  if required.

**Pins 23 and 24. Demodulator reference tuned circuit**

The SECAM signal is applied to the demodulator via a bell filter and a limiter amplifier. Only one chrominance demodulator is used because of the sequential nature of the signal. The reference signal from the tuned circuit is applied to pins 23 and 24. Tuning and damping adjustments of the reference tuned circuit should be performed at  $V_{5-2} > 2 \text{ V}$  (SECAM video (R-Y) (B-Y) information switched off). Adjustments should be such that minimum modulator voltage appears at pin 8, then any deviations between the black levels (when clamping on the back porch and when an artificial black level is filled in) can be made minimum.

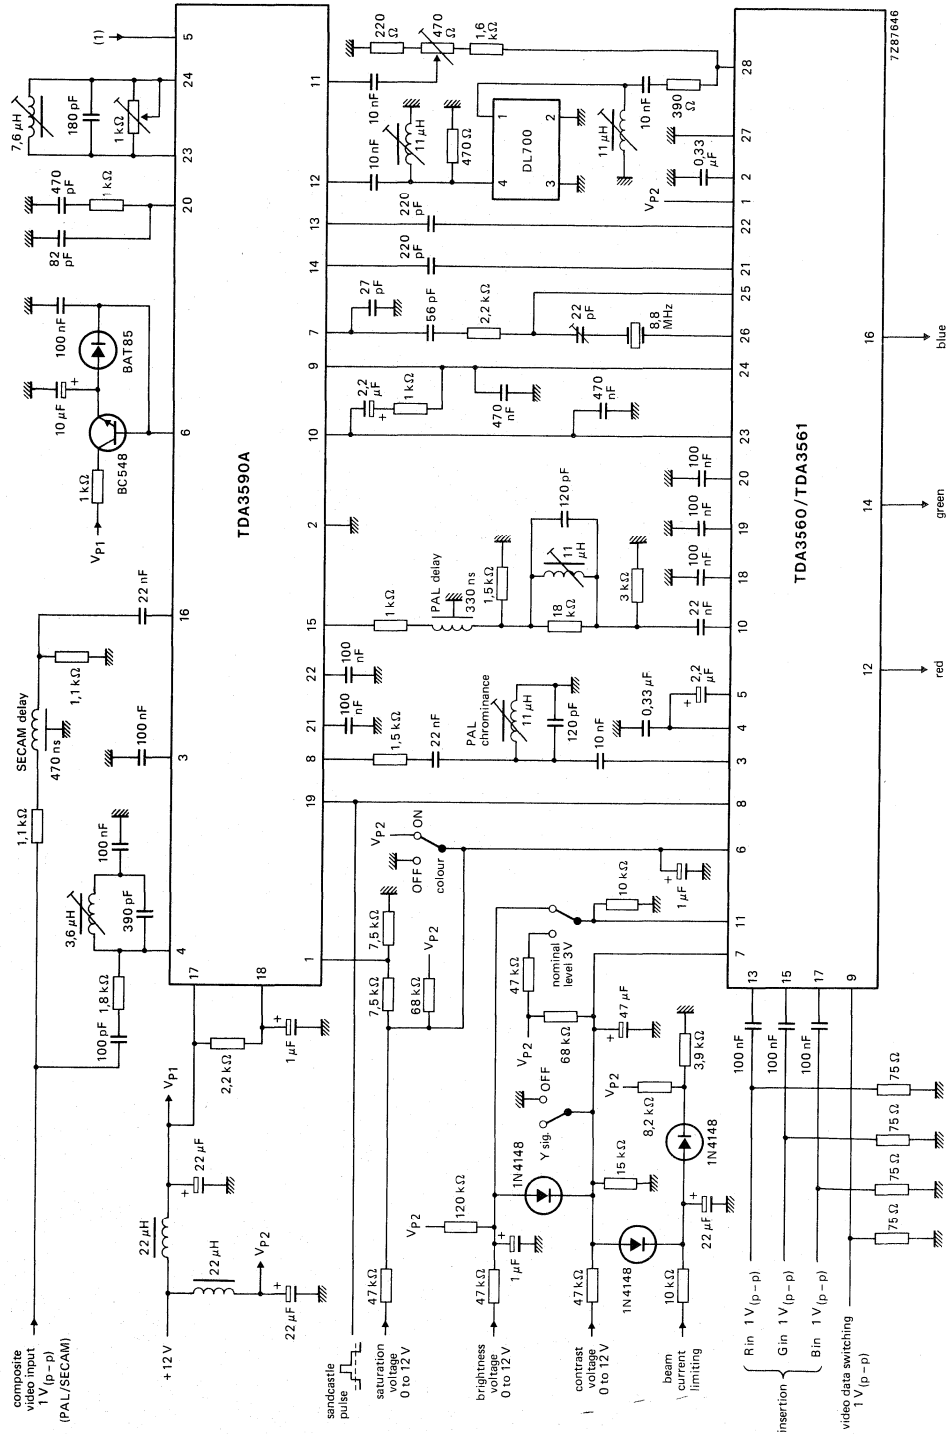

(1) See Application Information for pin 5 — horizontal/vertical identification.

Fig. 3 PAL/SECAM decoder application.

APPLICATION INFORMATION (continued)


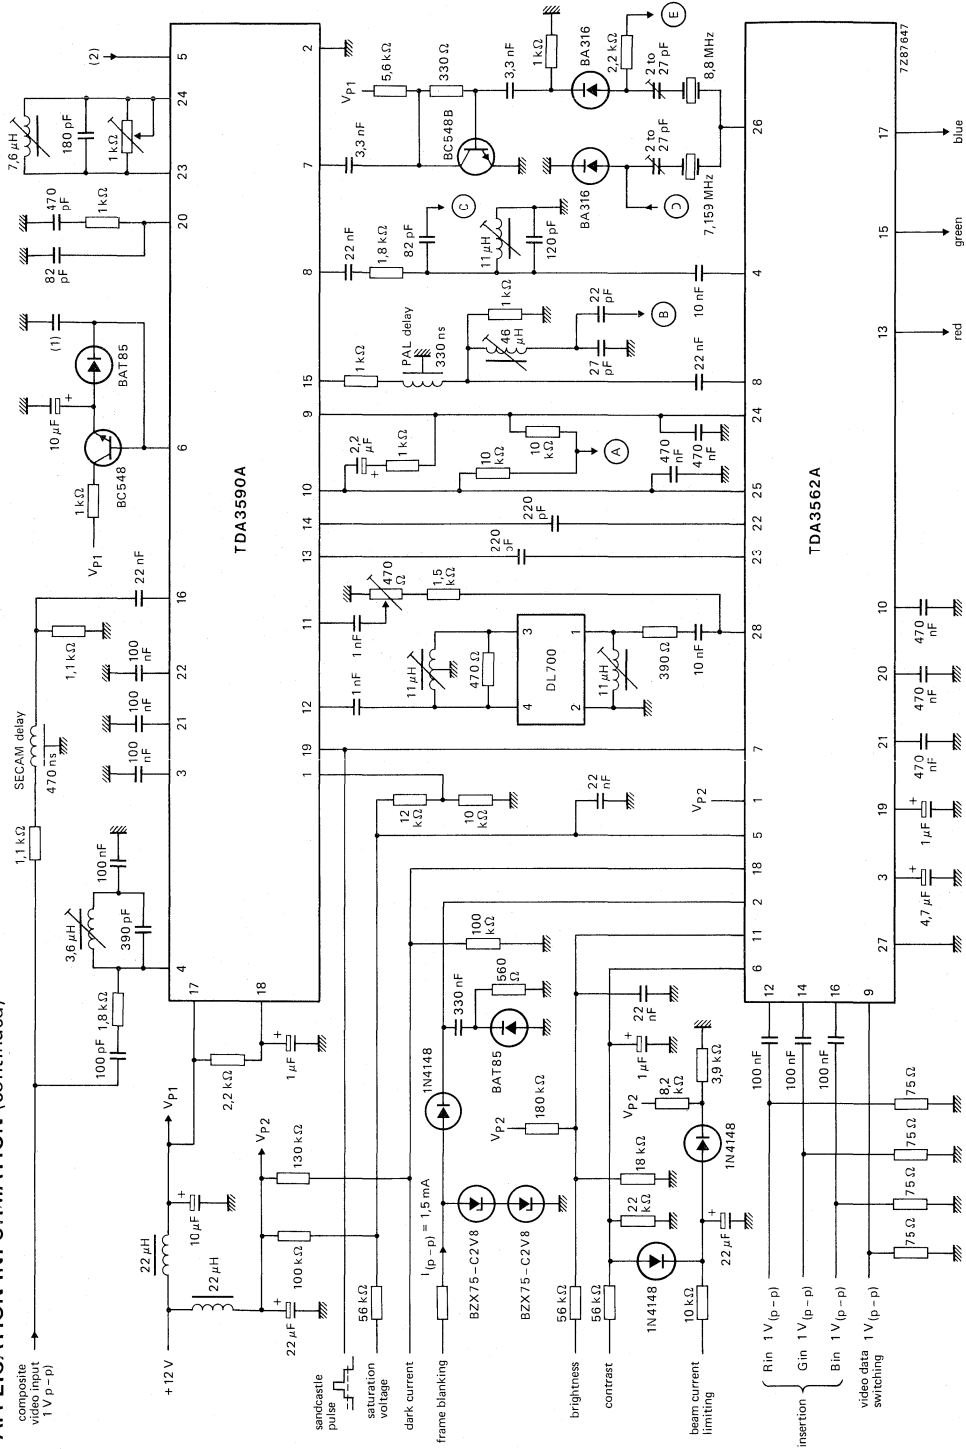


Fig. 4a PAL/SECAM/NTSC decoder application (continued in Fig. 4b).



- (1) Capacitor value = 100 nF for horizontal identification or 1  $\mu$ F for vertical identification.
- (2) See Application Information for pin 5 — horizontal/vertical identification.

Fig. 4b PAL/SECAM/NTSC decoder application (continued from Fig. 4a).

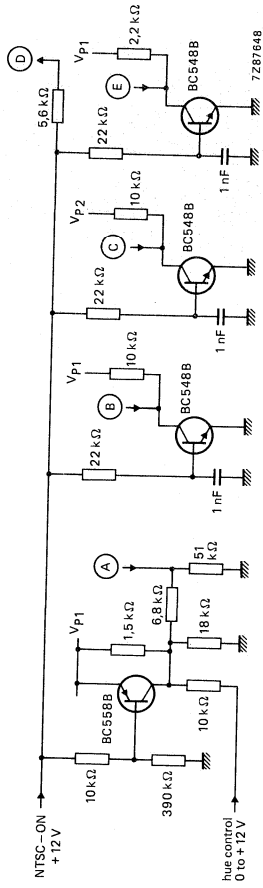

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3592A

## SECAM-PAL TRANSCODER

### GENERAL DESCRIPTION

The TDA3592A transcoder circuit converts SECAM input signals into true PAL signals, and can be used in combination with all types of PAL decoder.

### Features

- Limiter input for chrominance signal
- SECAM demodulator
- Clamp circuits and de-emphasis for colour difference signals
- Modulator to provide true PAL signals
- 4,43 MHz oscillator
- Sandcastle pulse detector
- Identification circuit for horizontal and vertical SECAM identification
- Can be used with all types of PAL decoder
- Power-saving feature operates when supply voltage falls to (typ.) 5 V: SECAM processing shuts down but SECAM signal path remains active

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage (pin 17)		V <sub>p</sub>	9,0	12,0	13,2	V
Supply current (pin 17)	V <sub>p</sub> = 12 V	I <sub>p</sub>	65	90	115	mA
Supply current (pin 17 and 18) (SECAM only)	V <sub>p</sub> = 5 V	I <sub>p</sub>	16	20	24	mA
<b>Chrominance amplifier and demodulator</b>						
Input signal SECAM (pin 3) (peak-to-peak value)		V <sub>3-1(p-p)</sub>	—	—	1100	mV
Input signal SECAM (pin 3) (peak-to-peak value)		V <sub>3-1(p-p)</sub>	15	100	300	mV
Output signal PAL (pin 9) (peak-to-peak value)	pin 3 = 280 kHz	V <sub>9-1(p-p)</sub>	—	820	—	mV
<b>Identification</b>						
Input voltage range for horizontal identification (pin 4)		V <sub>4-1</sub>	4,1	—	V <sub>p</sub>	V
Input voltage range for vertical identification (pin 4)		V <sub>4-1</sub>	0	—	2,9	V
Identification at pin 6		V <sub>6-1</sub>	—	10,6	—	V
Slicing level reference voltage (pin 5)		V <sub>5-1</sub>	—	7,0	—	V
<b>Sandcastle pulse detector</b>						
Vertical blanking level		V <sub>19-1</sub>	—	1,5	—	V
Horizontal blanking level		V <sub>19-1</sub>	—	3,5	—	V
Burst gating level		V <sub>19-1</sub>	—	7,0	—	V
<b>Luminance amplifier</b>						
Luminance input signal (peak-to-peak value)		V <sub>16-1(p-p)</sub>	—	1,2	—	V
Luminance amplifier gain at 4,4 MHz		G <sub>16-15</sub>	—	7,0	—	dB

### PACKAGE OUTLINE

24-lead DIL; plastic with heat spreader (SOT-101B).

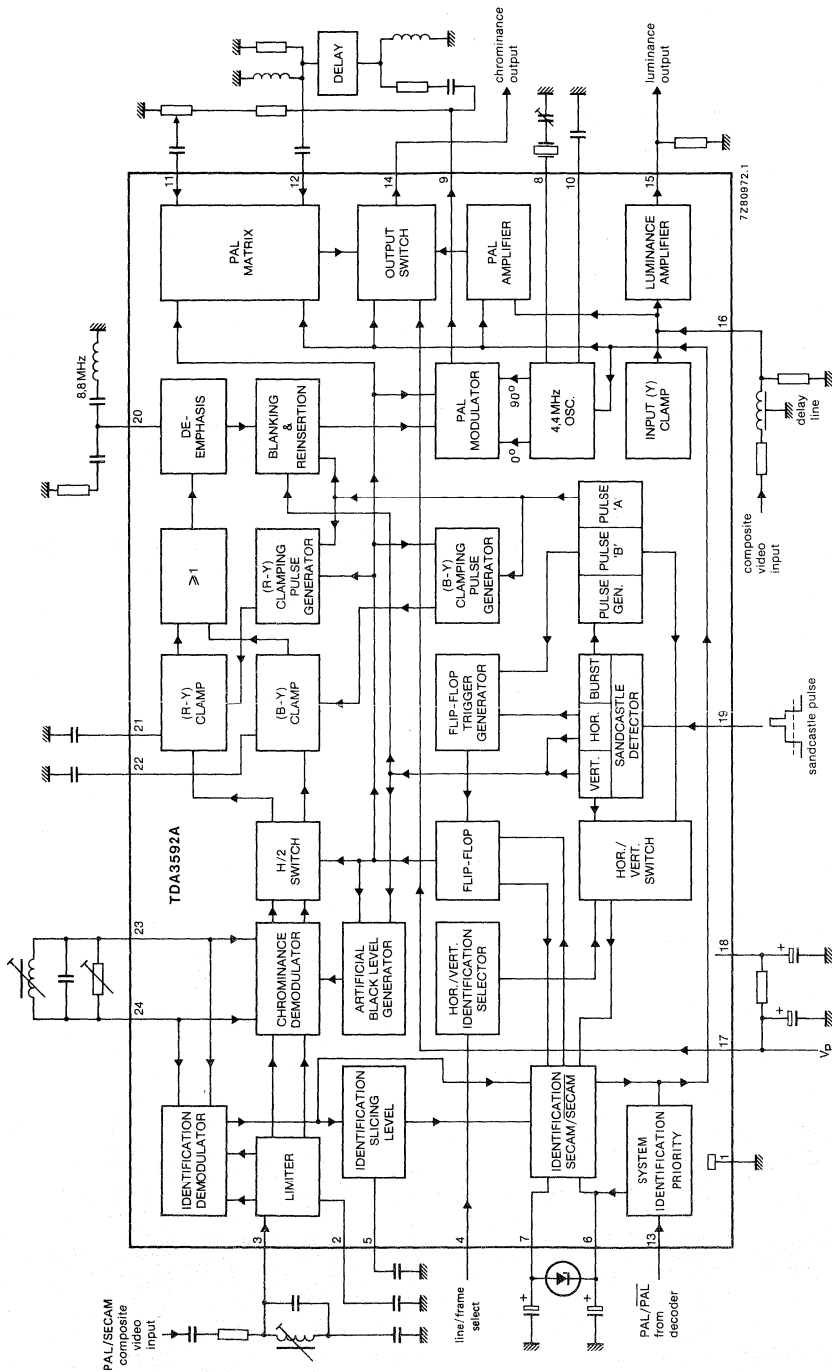


Fig. 1 Block diagram.



**PINNING**

1. Ground.
2. Limiter feedback.
3. Limiter input: chrominance input SECAM; identification input SECAM/SECAM.
4. Identification selection input using a DC level to preset the identification mode.  
At  $V_4 < 2,9$  V the TDA3592A is preset for frame identification.  
At  $V_4 > 4,1$  V the TDA3592A is preset for line identification.
5. Storage capacitor input for floating level identification.
6. Storage capacitor input to SECAM/SECAM identification circuit.
7. Double time-constant input to SECAM/SECAM identification circuit.
8. 4,43 MHz oscillator.
9. Sequentially modulated output.
10. Decoupling capacitor for miller integrator feedback circuit.
11. Direct input chrominance signal.
12. Delayed input chrominance signal.
13. PAL/ $\overline{\text{PAL}}$  input signal from PAL decoder.
14. Chrominance output signal.
15. Luminance output signal.
16. Luminance/SECAM input signal.
17. Positive supply voltage ( $V_p$ ).
18. Decoupled positive supply voltage.
19. Three-level sandcastle pulse input.
20. De-emphasis circuit connection:  $R = 560 \Omega$ ;  $C = 1$  nF.
21. Storage capacitor connection for (R-Y) clamp.
22. Storage capacitor connection for (B-Y) clamp.
23. Demodulator reference tuned circuit: nominal frequency = 4,33 MHz; nominal  $Q_L = 2,45$ .
24. As for pin 23.

DEVELOPMENT DATA

## FUNCTIONAL DESCRIPTION

### Demodulation

The chrominance and identification demodulators of the TDA3592A both share the same reference tuned circuit (pins 23 and 24). The identification circuit automatically detects whether the incoming signal is SECAM or SECAM (NTSC, PAL or black-and-white).

When the incoming signals are PAL they are diverted via pin 16 to the chrominance output at pin 14 and no signal demodulation takes place. The delay line connected to pin 16 delays the signals to equalize the delay of the SECAM-PAL transcoding process. When SECAM signals are received, the PAL signal path is switched off.

Incoming SECAM signals are applied to pin 3 via an external bell filter. The signals are amplified, limited and then demodulated. Only one demodulator is necessary as the colour difference signals are available sequentially. After demodulation the colour difference signals are separated by an H/2 switch and then applied to (R-Y) and (B-Y) clamp circuits where the black levels are clamped to the same DC level. With all conditions at pin 4, artificial black levels are inserted during the horizontal blanking periods. This is done because of the possibility of horizontal burst signals not being available. The artificial levels may not be identical to the detected black level due to circuit spread but this can be corrected by detuning the reference tuned circuit.

The two colour difference signals are combined again after clamping and then applied to the modulator via de-emphasis, blanking and reinsertion circuits. The ratio of (R-Y) to (B-Y) at the de-emphasis output (pin 20) is 1,78.

### Modulation

A burst signal is reinserted into the combined SECAM signal at the input to the PAL modulator. At this input the phase relationship for magenta colour is  $+(R-Y)$  and  $-(B-Y)$ . The modulation carriers for the (R-Y) and (B-Y) signals are  $90^\circ$  out of phase; for a magenta colour the modulated (R-Y) component has the same phase position as the (R-Y) burst. The (B-Y) burst is modulated  $180^\circ$  out of phase with respect to the (B-Y) component of a magenta-coloured input signal.

### Identification SECAM/SECAM

Identification of the SECAM signal is performed using the fact that only SECAM signals have a line-to-line difference in voltage level. The identification circuit compares the phase of the demodulated voltage difference waveform with the phase of the flip-flop output. If the phase relationship is not correct, the flip-flop is reset by an extra pulse from the flip-flop trigger generator. For horizontal identification the phase comparison is performed during the period of pulse 'B' (see Fig. 2). When vertical identification is selected, the comparison is performed only during the horizontal scan of the vertical blanking. The SECAM identification circuits operate when selected by the voltage on pin 4; this may be horizontal, vertical or combined horizontal and vertical identification, depending on the switching arrangements of pin 4.

These are as follows:

- Horizontal identification preset when  $V_{4.1} < 2,9$  V;
- Vertical identification preset when  $V_{4.1} > 4,1$  V;
- Horizontal/vertical combination when sandcastle pulse is present on pin 4.

Information obtained from the identification detector is also used for colour killing and, if required, for switching to PAL.

### Sandcastle pulse detection

The sandcastle pulse detector requires a three-level sandcastle pulse to provide horizontal blanking, vertical blanking and burst gate pulses. The detector burst gate pulse triggers a pulse generator which produces two timing pulses, pulse 'A' and pulse 'B' (see Fig. 2). Pulse 'A' is used to time the PAL modulator burst and to sample the (R-Y) and (B-Y) clamping pulse generators. A (R-Y) clamping pulse is generated only during a red line and a (B-Y) clamping pulse only during a blue line. Pulse 'B' times the SECAM horizontal identification.

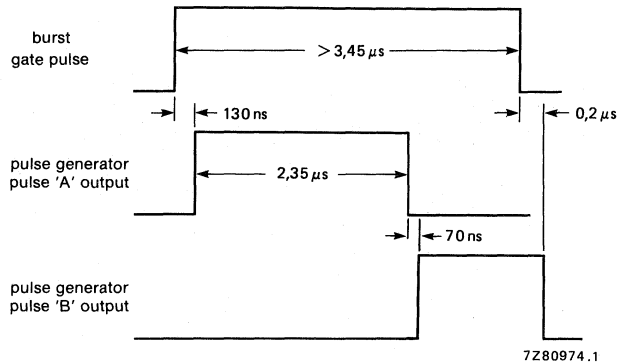


Fig. 2 Burst gate timing pulse generation.

### Carrier generation

The carrier signal for the PAL modulator is obtained from a 4,43 MHz oscillator. An internal Miller integrator operates in conjunction with the decoupling capacitor at pin 10 to provide the required 90° phase shift.

### PAL matrix

The signal output from the PAL modulator at pin 9 is sequentially modulated with (R-Y) burst phased in the +(R-Y) direction, and (B-Y) burst phased in the -(B-Y) direction. This PAL signal is applied directly to pin 11 and via a 64 μs delay to pin 12. A true PAL signal is constructed in the PAL matrix by means of an additional/substraction process (in a correct H/2 sequence) using the delayed and undelayed inputs.

**FUNCTIONAL DESCRIPTION** (continued)

**Coupling of identification systems**

Coupling of a TDA3592A and a PAL decoder can be performed to obtain an optimum identification system. The system operates using the functions of pins 13, 6 and 7: the voltage level at pin 13 is controlled by the PAL/ $\overline{\text{PAL}}$  detection of the PAL decoder; and the voltage level at pins 6 and 7 are functions of SECAM/ $\overline{\text{SECAM}}$  detection in the TDA3592A.

The circuit action is as follows and is summarized in Table 1.

Channel switching	During channel switching pin 6 is taken rapidly to a high voltage ( $\pm 10,2 \text{ V}$ ), this corresponds to the $\overline{\text{SECAM}}$ mode of the TDA3592A.
PAL	The high voltage level at pin 6 caused by channel switching is maintained by the TDA3592A when it recognizes the signal as $\overline{\text{SECAM}}$ (this condition is maintained even if reflected PAL signals are present). The PAL decoder recognizes the signal as PAL and takes pin 13 of TDA3592A to a voltage greater than 1,7 V. The TDA3592A is now held in the $\overline{\text{SECAM}}$ condition by an internal current source at pin 6.
SECAM	The initial high voltage level ( $+ 10,2 \text{ V}$ ) at pin 6 caused by channel switching sets the TDA3592A in the $\overline{\text{SECAM}}$ mode and during this time the PAL decoder detects a PAL signal. This causes a voltage at pin 13 of $< 1,1 \text{ V}$ which prevents the internal current source of TDA3592A maintaining the high voltage level of pin 6 which, in turn, allows the TDA3592A to detect SECAM. The initiation of SECAM detection is delayed by the action of the external circuit at pins 6 and 7 and commences as pin 6 approaches 7,0 V. The SECAM signals are converted by TDA3592A to PAL signals at pin 14, which results in the PAL decoder switching to the PAL mode (the TDA3592A remains in the SECAM mode).
Black-and-white	The TDA3592A is initially set in the $\overline{\text{SECAM}}$ mode as previously described. The PAL decoder detects PAL and the TDA3592A detects SECAM which results in a system operation in the colour-killing mode.

**Table 1** System operating modes

TDA3592A	PAL decoder mode	System operating mode
SECAM	$\overline{\text{PAL}}$	SECAM
$\overline{\text{SECAM}}$	$\overline{\text{PAL}}$	condition not used
$\overline{\text{SECAM}}$	PAL	PAL
SECAM	PAL	black-and-white

**System priorities**

When TDA3592A pin 13 is connected to the PAL/ $\overline{\text{PAL}}$  output of a PAL decoder, the system will give PAL priority in signal identification. Connecting TDA3592A pin 13 to ground will give SECAM priority.

**Luminance and chrominance signal paths**

The signal input at pin 16 is clamped by a circuit which detects the top of the luminance signal sync pulse. This clamp, the luminance signal path to pin 15 and the  $\overline{\text{SECAM}}$  signal path to pin 14 remain active when the supply voltage falls to (typ.) 5 V. At this level of supply voltage the SECAM processing circuits are switched off, giving a reduction in total power dissipation.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage (pin 17)	$V_p$	—	13,2	V
Total power dissipation	$P_{tot}$	—	1,78	W
Operating ambient temperature range	$T_{amb}$	-25	+70	°C
Storage temperature range	$T_{stg}$	-25	+150	°C

**CHARACTERISTICS** $V_p = V_{17-1} = 12$  V;  $T_{amb} = 25$  °C; unless otherwise specified.

The parameter values are valid only when the reference tuned circuit has been aligned as detailed in note 1. All voltages are reference to ground pin 1.

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supplies</b>						
Supply voltage (pin 17)		$V_{17}$	9,0	12	13,2	V
Supply current (pin 17)		$I_{17}$	65	90	115	mA
Supply current (pin 18)		$I_{18}$	40	—	160	μA
Decoupled supply voltage (pin 18)	$R_{ext17-18} = 2$ kΩ	$V_{18}$	8,8	11,8	13,2	V
External capacitance (pin 18)		$C_{18}$	—	—	10	μF
Total power dissipation		$P_{tot}$	—	1,08	1,38	W
Thermal resistance, junction to ambient		$R_{th j-a}$	—	40	45	K/W
<b>Chrominance amplifier and demodulator</b>						
Input signal SECAM (peak-to-peak value)		$V_3(p-p)$	—	—	1100	mV
Input signal SECAM at which correct limiting occurs (peak-to-peak value)		$V_3(p-p)$	15	100	300	mV
Input resistance (pin 3)		$R_3$	9,6	12,1	14,6	kΩ
Input capacitance (pin 3)		$C_3$	—	—	5	pF
Input resistance between pins 23 and 24		$R_{23-24}$	2,9	3,6	4,3	kΩ
Input capacitance between pins 23 and 24		$C_{23-24}$	—	12	—	pF
De-emphasis output resistance (pin 20)		$R_{20}$	0,9	1,1	1,3	kΩ
Chrominance demodulator zero point stability (pin 20)	note 2	$f_0$	—	5	—	kHz

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Chrominance amplifier and demodulator (continued)</b>						
Linearity of (B-Y) demodulation (pin 20)	note 3	—	—	94	—	%
Linearity of (R-Y) demodulation (pin 20)	note 4	—	—	100	—	%
(R-Y)/(B-Y) ratio (pin 20)		—	—	1,78	—	%
Relative deviation of reinserted black level/demodulated black level (pin 20) as a function of temperature (R-Y) signals	note 5	—	—	0,22	—	kHz/°C
(B-Y) signals	note 5	—	—	0,22	—	kHz/°C
<b>Identification SECAM/SECAM</b>						
Input voltage for line identification (pin 4)	note 6	V <sub>4</sub>	4,1	—	V <sub>p</sub>	V
Input voltage for frame identification (pin 4)		V <sub>4</sub>	0	—	2,9	V
Switching level for line/frame identification (pin 4)		V <sub>4</sub>	3,0	3,5	4,0	V
input current (pin 4)		-I <sub>4</sub>	—	5	25	μA
Voltage at pin 6 during SECAM/PAL		V <sub>6</sub>	—	10,2	—	V
Voltage at pin 6 during SECAM/PAL		V <sub>6</sub>	—	11,5	—	V
Voltage at pin 6 during SECAM		V <sub>6</sub>	—	7,0	—	V
Identification at pin 6		V <sub>6</sub>	—	10,6	—	V
Colour OFF for SECAM		V <sub>6</sub>	9,8	10,1	10,4	V
Colour ON for SECAM		V <sub>6</sub>	8,8	9,1	9,4	V
Slicing level reference voltage (pin 5)		V <sub>5</sub>	—	8,4	—	V
<b>Sandcastle pulse detector and clamping pulse generator</b>						
Voltage level at which the vertical blanking pulse is separated		V <sub>19</sub>	1,0	1,5	2,0	V
Voltage level at which the horizontal blanking pulse is separated		V <sub>19</sub>	3,0	3,5	4,0	V
Voltage level at which the burst gating pulse is separated		V <sub>19</sub>	6,5	7,0	7,5	V

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse detector and clamping pulse generator (continued)</b>						
Input current	$V_{19} = 0 \text{ V}$	$-I_{19}$	—	30	100	$\mu\text{A}$
Width of pulse 'A' (Fig. 2)	note 7		1,85	2,35	2,85	$\mu\text{A}$
Required width of pulse 'B' (Fig. 2)	note 7		0,6	—	—	$\mu\text{s}$
<b>Luminance amplifier</b>						
Input signal (peak-to-peak value) (pin 16)		$V_{16(p-p)}$	—	1,2	1,7	V
Gain (pin 16 to 15)	$f_{16} = 4,4 \text{ MHz}$	$G_{16-15}$	6,5	7,5	8,5	dB
Input current (pin 16)		$I_{16}$	—	1,0	5,0	$\mu\text{A}$
Output impedance (pin 15)		$Z_{15}$	—	20	—	$\Omega$
Frequency response at $-3 \text{ dB}$ (pin 15 and 16)		f	6,0	—	—	MHz
Gain (pin 16 to 14)	$f_{16} = 4,4 \text{ MHz}$	$G_{16-14}$	6,0	7,0	8,0	dB
Frequency response at $-3 \text{ dB}$ (pin 14 and 16)		f	6,0	—	—	MHz
External load resistance (pin 15)		$R_L$	2,0	—	—	$\text{k}\Omega$
<b>Limiter, chrominance demodulator and PAL modulator</b>						
	note 8					
Output resistance (pin 9)		$R_9$	—	25	—	$\Omega$
DC output voltage during horizontal blanking (pin 9)		$V_9$	—	9,6	—	V
Internal biasing resistor for emitter follower (pin 9)			—	9,0	—	$\text{k}\Omega$
External load resistance (pin 9)		$R_{L(9)}$	2	—	—	$\text{k}\Omega$
Output signal (pin 9) when input to pin 3 has a $\Delta f$ of 280 kHz; without external load (peak-to-peak value)		$V_{9(p-p)}$	—	0,82	—	mV
(R-Y)/(B-Y) ratio (pin 9)			1,50	1,78	2,11	
Chrominance/burst ratio for SECAM (pin 9)			2,5	3,0	3,5	
Linearity of (B-Y) signal (pin 9)	note 3		85	92	99	%
Linearity of (R-Y) signal (pin 9)	note 4		93	100	107	%
Black level shift as a function of temperature (pin 9)						
(R-Y) signals	note 9		—	0,22	—	$\text{kHz}/^\circ\text{C}$
(B-Y) signals	note 9		—	0,22	—	$\text{kHz}/^\circ\text{C}$

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Limiter, chrominance demodulator and PAL modulator (continued)</b>						
Phase relationship of modulated (R-Y) burst to modulated (B-Y) burst (pin 9)			87	90	93	deg
Amplitude relationship of modulated (R-Y) burst to modulated (B-Y) burst (pin 9)			-1,5	0	+1,5	dB
Black level shift as a function of supply voltage (pin 9)			-	-1,5	-	kHz/V
(R-Y) signal			-	1,0	-	kHz/V
(B-Y) signal						
<b>Oscillator</b>						
Oscillator frequency (pin 9) (set with series capacitor)		$f_{OSC}$	-	4,433619	-	MHz
Frequency deviation without spread of external components (pin 9)		$\Delta f_{OSC}$	-	-	$\pm 150$	Hz
Temperature coefficient of oscillator frequency (pin 9)			-	-2	-3	Hz/°C
Frequency deviation for change of $V_p$ from 9,0 to 13,2 V		$\Delta f_{OSC}$	-	-	150	Hz
DC voltage (pin 8)		$V_8$	-	4,7	-	V
Input resistance (pin 8)		$R_8$	-	1	-	k $\Omega$
DC voltage (pin 10)		$V_{10}$	-	4,4	-	V
Input resistance (pin 10)		$R_{10}$	-	2	-	k $\Omega$
<b>PAL matrix</b>						
Input resistance (pin 11)		$R_{11}$	700	900	1100	$\Omega$
Input resistance (pin 12)		$R_{12}$	700	900	1100	$\Omega$
Output resistance (pin 14) (SECAM/SECAM)		$R_{14}$	-	40	-	$\Omega$
Internal emitter follower load resistance (pin 14)		$R_{INT(14)}$	-	7	-	k $\Omega$
External load resistor (pin 14)		$R_{L(14)}$	2,4	-	-	k $\Omega$
DC voltage (pin 11)		$V_{11}$	-	5,0	-	V
DC voltage (pin 12)		$V_{12}$	-	5,0	-	V
DC voltage (pin 14)	SECAM mode	$V_{14}$	-	6,2	-	V
DC voltage (pin 14)	SECAM mode and line blanking	$V_{14}$	-	4,9	-	V



DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>PAL matrix (continued)</b>						
H/2 ripple on chrominance output (pin 14) (peak-to-peak value)	SECAM mode	V <sub>14(p-p)</sub>	—	—	100	mV
Gain A; pin 11 to 14		G <sub>A</sub>	9	10	11	dB
Gain B; pin 12 to 14 ((R-Y) at pin 9)		G <sub>B</sub>	9	10	11	dB
Gain C; pin 12 to 14 ((B-Y) at pin 9)		G <sub>C</sub>	9	10	11	dB
Gain A — gain B		G <sub>A</sub> -G <sub>B</sub>	-0,7	—	+0,7	dB
Gain A — gain C		G <sub>A</sub> -G <sub>C</sub>	-0,7	—	+0,7	dB
Gain B — gain C		G <sub>B</sub> -G <sub>C</sub>	-0,7	—	+0,7	dB
Phase A; pins 11, 14 to pins 12, 14 ((R-Y) at pin 9)			—	181,5	—	deg
Phase B; pins 11, 14 to pins 12, 14 ((B-Y) at pin 9)			—	1,5	—	deg
Phase A — phase B			178	180	182	deg
<b>Identification PAL/<math>\overline{\text{PAL}}</math></b>						
Input condition for PAL (pin 13)		V <sub>13</sub>	1,7	—	V <sub>p</sub>	V
Input condition for $\overline{\text{PAL}}$ (pin 13)		V <sub>13</sub>	—	—	1,1	V
Input current	V <sub>13</sub> = 6 V	I <sub>13</sub>	—	—	10	μA
Input resistance	V <sub>13</sub> = 8,2 V	R <sub>13</sub>	7,5	11,5	15,5	kΩ
Pin 6 internal current in PAL/SECAM mode		-I <sub>6</sub>	0,24	0,4	0,58	mA
Switching level PAL/ $\overline{\text{PAL}}$ (pin 13)		V <sub>13</sub>	1,2	1,4	1,6	V

## CHARACTERISTICS AT LOW SUPPLY VOLTAGE

$V_P = V_{17-1} = 5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supplies</b>						
Supply current		$I_{17+18}$	16	20	24	mA
Supply voltage switching level for preset SECAM signal path	SECAM processing OFF	$V_{17-1}$	6,5	7,5	8,2	V
<b>Luminance amplifier</b>						
Input signal (peak-to-peak value)		$V_{16(p-p)}$	—	0,45	0,56	V
Gain (pin 16 to 15)	$f_{16} = 4,4 \text{ MHz}$	$G_{16-15}$	6,0	7,0	8,0	dB
Input current (pin 16)		$I_{16}$	—	1,0	5,0	$\mu\text{A}$
Output impedance (pin 15)		$ Z_{15-1} $	—	20	—	$\Omega$
Minimum load resistance (pin 15)		$R_L$	2	—	—	k $\Omega$
Frequency response at $-3 \text{ dB}$ (pin 16 to 15)		f	6,0	—	—	MHz
Gain (pin 16 to 14)	$f_{16} = 4,4 \text{ MHz}$	$G_{16-14}$	5,7	6,8	7,9	dB
Frequency response at $-3 \text{ dB}$ (pin 16 to 14)		f	6	—	—	MHz

## Notes to the characteristics

1. The parameter values given in the characteristics are valid only when the following alignment procedure is performed:
  - a. Supply a SECAM signal input to pin 3 at 100 mV (peak-to-peak value) without deviation during a red and blue line (SECAM black colour information).
  - b. Align the reference tuned circuit so that the output signal from pin 14 to the PAL decoder is minimum during scan (PAL black colour information).
2. When the input signal to the limiter (pin 3) changes from 300 to 15 mV (peak-to-peak value) the zero point of the chrominance demodulator shifts by a typical value of 5 kHz;  $f = 4,33$  MHz (typ.).
3. (B-Y) linearity is defined by  $V_{out(yellow)}/V_{out(blue)}$  where  $f_{yellow} =$  (typ.) 4,02 MHz;  $f_{blue} =$  (typ.) 4,48 MHz.
4. (R-Y) linearity is defined by  $V_{out(cyan)}/V_{out(red)}$  where  $f_{cyan} =$  (typ.) 4,68 MHz;  $f_{red} =$  (typ.) 4,12 MHz.

5. The parameter value is equated by:  $\frac{(B-D)/F - (A-C)/E}{Y - X} \times \frac{\Delta f \text{ (kHz)}}{^{\circ}\text{C}}$

$$E = \frac{E1 - E2}{2} \quad F = \frac{F1 - F2}{2}$$

Where A = demodulated black level at temperature X

B = demodulated black level at temperature Y

C = artificial black level at temperature X

D = artificial black level at temperature Y

E1 = demodulated output signal at temperature X ( $f_o - \Delta f$ )

E2 = demodulated output signal at temperature X ( $f_o + \Delta f$ )

F1 = demodulated output signal at temperature Y ( $f_o - \Delta f$ )

F2 = demodulated output signal at temperature Y ( $f_o + \Delta f$ )

for B-Y:  $f_o = f_{ob} = 4,25$  MHz ( $\Delta f = 230$  kHz)

for R-Y:  $f_o = f_{or} = 4,40625$  MHz ( $\Delta f = 280$  kHz)


6. During stable signal conditions  $V_7$  is always at  $V_F$  (BAT85) below  $V_6$ .
7. The burst gate pulse width  $> 3,45 \mu\text{s}$ .
8. The specification figures are only valid when the reference tuned circuit is aligned as indicated in note 1.
9. Ensure that the 4,433 MHz carrier is in the correct phase; black level shift at temperature X = A and at Y = B.  
Output signal ( $\Delta f = 230$  kHz for B-Y;  $\Delta f = 280$  kHz for R-Y) at temperature X = E and at Y = F.

The parameter is equated by:  $\frac{(B/(F-B) - A/(E-A))}{Y - X} \times 230; 280 \text{ kHz}$

10. Chrominance definition – burst ratio at SECAM condition (pin 9).

The parameter is equated by:  $\frac{V_{out(p-p) \text{ Red (R-Y)}}}{V_{burst(p-p) \text{ (R-Y)}}$

APPLICATION INFORMATION

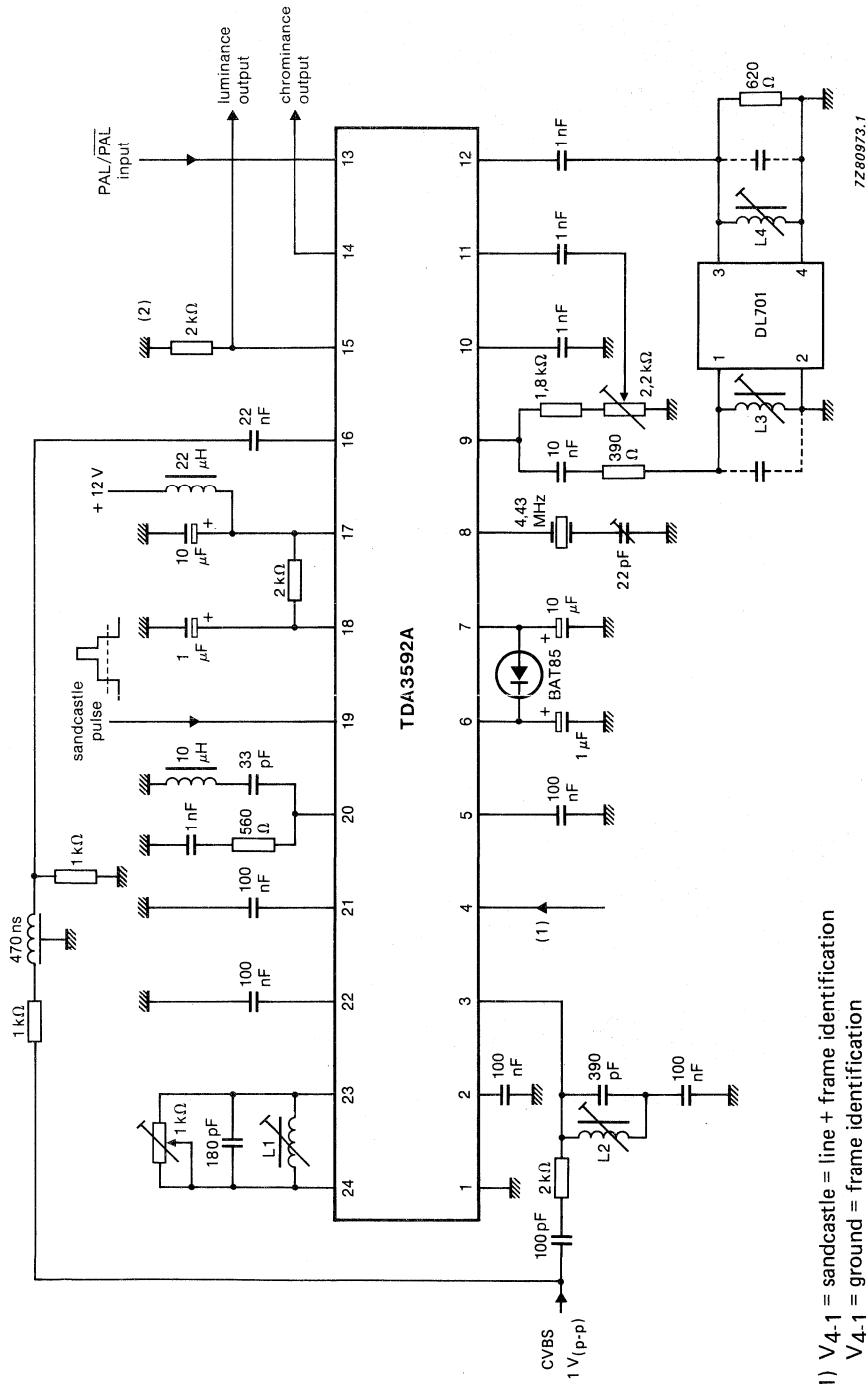

- (1) V4-1 = sandcastle = line + frame identification
- V4-1 = ground = frame identification
- V4-1 = Vp = line identification
- (2) minimum load resistance at pin 15 = 2 kΩ

Fig. 3 Application circuit.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3596

## ECHO EQUALIZER FOR TELETEXT

### GENERAL DESCRIPTION

The TDA3596 is a monolithic bipolar integrated circuit, used for teletext echo-equalization. The circuit consists of an adaptive transversal filter, in which the coefficients are set by an error signal, which is derived from the incoming teletext signal. The circuit is intended to be used in combination with a teletext decoder.

### Features

- Contains adaptive transversal filter
- Coefficients set by error signal derived from incoming signal
- Equalizes echoes up to  $\pm 0,5 \mu\text{s}$  and 40% amplitude
- Interfaces with teletext decoders
- Low input impedance
- AGC and AGC reset for constant output level
- Can be used with VIP and VIP 2

### QUICK REFERENCE DATA


---

Supply voltage (pin 9)	V <sub>p</sub>	typ.	12 V
Supply current (pin 9)	I <sub>p</sub>	max.	50 mA
TXT eye (pin 2)		typ.	97 %
Propagation delay			
IN to TXT output	t <sub>d</sub>	typ.	30 ns
IN to VIDEO output	t <sub>d</sub>	typ.	30 ns
Input impedance	R <sub>11-16</sub>	typ.	100 $\Omega$
Operating ambient temperature range			-20 to +70 °C

---

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38 with heat spreader).

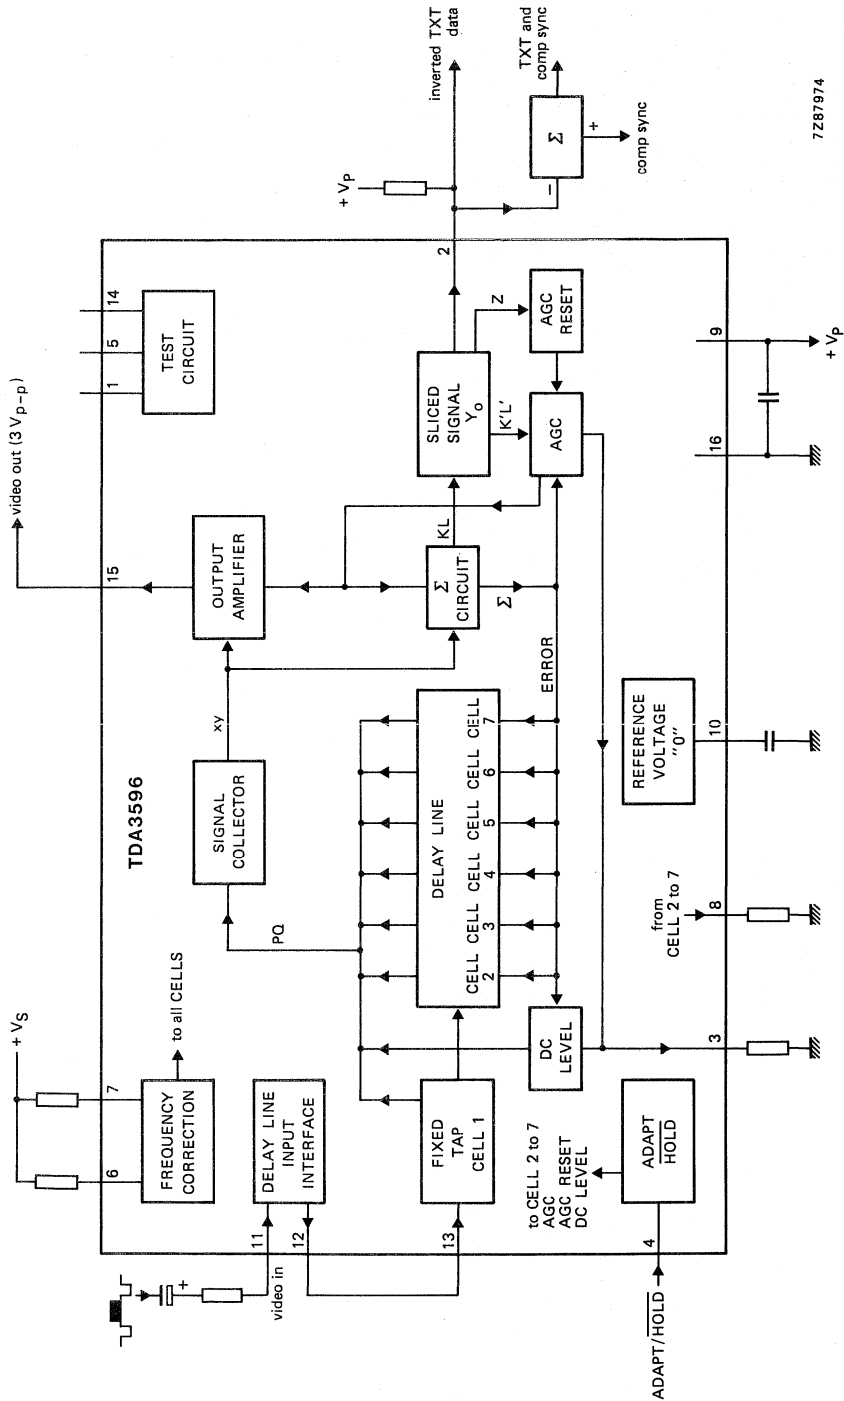

7287974

Fig. 1 Block diagram.

## FUNCTIONAL DESCRIPTION

From field tests carried out at many sites, it appeared that the reception of an acceptable TV-picture did not always guarantee error-free TXT-reception.

In particular short echoes of up to  $5 \mu\text{s}$  turned out to be the cause of damaged TXT-data without giving serious degradation of the subjective picture quality. The performance of the circuit strongly depends on the structure of the input signal as regards amplitude, phase and length of the echo, presence of non-linear distortion caused by envelope detection in some cable systems, and the synchronous demodulator in the TV-set.

In general the circuit equalizes echoes up to  $\pm 0,5 \mu\text{s}$  and 40% in amplitude.

### Video circuit, pins 11 and 12

The circuit is a.c.-coupled to a source of positive going composite video, such as is produced by the TDA3540, and the TDA3541 integrated circuits. The input amplifier has a low input impedance. The output of this circuit is fed to a series combination of seven filter cells which are used as delay elements of the transversal filter.

### Adaptive transversal cell and signal collector, pin 13

A series combination of seven cells is incorporated in the device, the outputs of which are combined to provide the input of the signal collector.

One cell comprises the following parts:

phase shift filter, integrator, correlator and tap.

The phase shift filter is used as a delay element of the adaptive transversal filter. In the correlation circuit, a correlation is made between the error signal and the delayed signal. As a result of this a capacitor (integrator) is charged. The weighting of the transversal filter is performed in the tap circuit and is controlled by the charge of the integrator capacitor.

The taps of all the filter cells are fed to the signal collector.

The loop gain of combined correlators, from pin 8 is fixed with an external  $5,6 \text{ k}\Omega$  resistor to ground.

### Frequency correction, pins 6 and 7

With this circuit a correction is made, in order to compensate the non-flat frequency response of the delay line. The correction is determined by the ratio of two external resistors connected to the supply voltage.

The resistor at pin 6 is  $33 \text{ k}\Omega$  and at pin 7 is  $56 \text{ k}\Omega$ .

### Adapt/Hold command, pin 4

This circuit is an interface that transmits a command input to the delay cells, AGC, AGC reset and d.c.-level corrector. When the signal is high ( $> 1,4 \text{ V}$ ) the equalizer comes into the adaptive mode and the coefficients of the filter are adjusted; when low, all coefficients keep their value.

The width of the Adapt/Hold signal has to comprise all teletext data, that is, the pulse goes high  $0,5 \mu\text{s}$  before the first clock pulse and ends during the front porch of the following sync. pulse.

### Reference voltage, pin 10

This is an internal reference to the mid-level value of the supply voltage. This pin needs a by-pass capacitor of  $100 \text{ nF}$  to ground.

**Video output amplifier, pin 15**

The output signal from the signal collector is passed to the output amplifier. In this circuit the video signal is corrected in d.c.-level and in amplitude, (the range is approximately  $\pm 2$  dB). It is not advisable to use this output for TXT handling as it is liable to some amplitude variations in the sync. amplitude when the equalizer is adapted on the TXT. It is advisable to use the spliced output of the IC for the TXT decoder.

**Error circuit and sliced TXT data output, pin 2**

From the output signal an error signal is derived and fed to the delay line cells and AGC circuit. In the error circuit a sliced version of the data signal is available and fed to an output current source at pin 2.

This signal can be taken off with a load resistor to the positive supply voltage. The signal is in anti-phase with the input signal.

When the incoming sync. is added to the spliced data output, which must be inverted, it can be used with the present VIP teletext device, (Video Input Processor SAA5030).

For future devices (VIP 2) the signal is fed directly to VIP 2.

**AGC circuit and AGC reset**

These circuits are used to maintain the output at a constant level, the range of this control is approximately  $\pm 2$  dB in the case of an error free signal. The range with echo depends on the value of the echo and the AGC of the receiver.

The AGC reset is needed to avoid unwanted situations during disturbances and interruptions of the incoming signals (latch up).

The loop gain of the AGC circuit and loop gain of the d.c.-level corrector is fixed with a 27 kilohm resistor between pin 3 and ground.

**The d.c.-level corrector**

The d.c.-level of the (P,Q) signal collector is adjusted by this circuit. The loop gain of this part is combined with the loop gain of the AGC circuit.

**Power supply, pin 9**

The circuit operates over a wide voltage range, 8 V to 16 V but functional testing is limited to the range 9,5 V to 13,2 V.

**Test pins for IC production**

Simple d.c. tests have been performed on pins 1, 5 and 14. Application specific performance cannot be guaranteed.

**Ground, pin 16**

All voltages in this specification are with respect to ground, pin 16, unless otherwise specified.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	V <sub>p</sub>	16 V
Total power dissipation	P <sub>tot</sub>	1500 mW
Storage temperature range	T <sub>stg</sub>	-20 to +125 °C
Operating ambient temperature range	T <sub>amb</sub>	-20 to +70 °C



## CHARACTERISTICS

$V_S = 12\text{ V}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ , measured in the test set-up shown in Fig. 2, unless otherwise specified.

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage range	V <sub>9-16</sub>	10,5	12	13,2	V
Supply current	I <sub>g</sub>	—	46	60	mA
Total power dissipation	P <sub>tot</sub>	—	550	720	mW
<b>Settings d.c.</b>					
Test pin 1	V <sub>1-16</sub>	2,7	2,9	3,1	V
AGC loop gain control, pin 3	V <sub>3-16</sub>	—	4,2	—	V
Test pin 7	V <sub>7-16</sub>	6,5	6,9	7,3	V
Frequency correction, pin 6	V <sub>6-16</sub>	—	2,4	—	V
Frequency correction, pin 7	V <sub>7-16</sub>	—	2,2	—	V
Delay line cells loop gain control pin 8	V <sub>8-16</sub>	3,7	4,1	4,5	V
Reference voltage, pin 10	V <sub>10/V<sub>g</sub></sub>	47,5	50	52,5	%
Test pin 14	V <sub>14-10</sub>	-30	5	40	mV
<b>Video input, pin 11</b>					
Recommended peak-to-peak signal measured with echo-free TXT	I <sub>11(p-p)</sub>	125	160	200	μA
Mid-data level	V <sub>11-16</sub>	—	3,25	—	V
Propagation delay					
input to TXT output	t <sub>d</sub>	—	30	—	ns
into video output	t <sub>d</sub>	—	30	—	ns
Input impedance	R <sub>11-16</sub>	—	100	—	Ω
<b>Delay cell</b>					
Delay of main signal per cell	t <sub>d</sub>	—	70	—	ns
Input cell 1, d.c.-level	V <sub>13-10</sub>	-30	5	40	mV
<b>Adapt/Hold command input</b>					
Voltage during adapting	V <sub>4-16</sub>	2	—	7	V
Voltage during hold	V <sub>4-16</sub>	0	—	1,2	V
Input current at V <sub>4</sub> = 0 V	I <sub>4</sub>	—	10	30	μA
Input current at V <sub>4</sub> = 7 V	I <sub>4</sub>	—	5	—	μA

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Video output, pin 15 (note 1)</b>					
Internal impedance	$ Z_i $	—	50	—	$\Omega$
Output load	$R_L$	—	4	2	$k\Omega$
Clamped level mid-data	$V_{15-16}$	—	3,2	—	V
Video output amplitude (sync-white)	$V_{15-16}$	2,7	3,1	3,6	V
Top sync. level	$V_{15-16}$	—	1,4	—	V
Gain control (note 2)	G	—	1	2,6	dB
Logical 'zero' level	$V_{15-16}$	—	2,4	—	V
Logical 'one' level	$V_{15-16}$	—	3,9	—	V
TXT eye: echo free (note 3)		75	92	—	%
test signal 1		75	90	—	%
test signal 2		70	90	—	%
test signal 3		70	90	—	%
test signal 4		60	90	—	%
<b>TXT output, pin 2</b>					
Output current for logical 'one'	$I_{OH}$	500	625	750	$\mu A$
Output current for logical 'zero'	$I_{OL}$	—	50	90	$\mu A$
Phase output data with respect to input data	$\Omega$	—	180	—	deg.
Maximum output voltage	$V_{2-16}$	—	—	$V_9$	V
Minimum output voltage	$V_{2-16}$	1/2	$V_9+0,6$	—	V
TXT eye for all test conditions		85	97	—	%

## Notes to the characteristics

1. Unless otherwise specified measured with echo-free TXT signal (p-p) 160  $\mu A$ .
2. Relative output voltage difference measured with echo-free TXT signals (p-p) 125  $\mu A$  and 200  $\mu A$ .

## 3. Test signals

- Echo-free 160  $\mu A$  (p-p) during TXT
- Test signal 1 160  $\mu A$  (p-p) main signal with 40% negative echo at 72 ns
- Test signal 2 160  $\mu A$  (p-p) main signal with 40% positive echo at 72 ns
- Test signal 3 160  $\mu A$  (p-p) main signal with 40% negative echo at 144 ns
- Test signal 4 160  $\mu A$  (p-p) main signal with 40% positive echo at 144 ns
- Test signal 5 160  $\mu A$  (p-p) main signal with 40% negative echo at 216 ns
- Test signal 6 160  $\mu A$  (p-p) main signal with 40% positive echo at 216 ns

The output signals are measured with a Rohde and Schwarz TV Data Distortion meter type DZF 347.3515.03.

DEVELOPMENT DATA

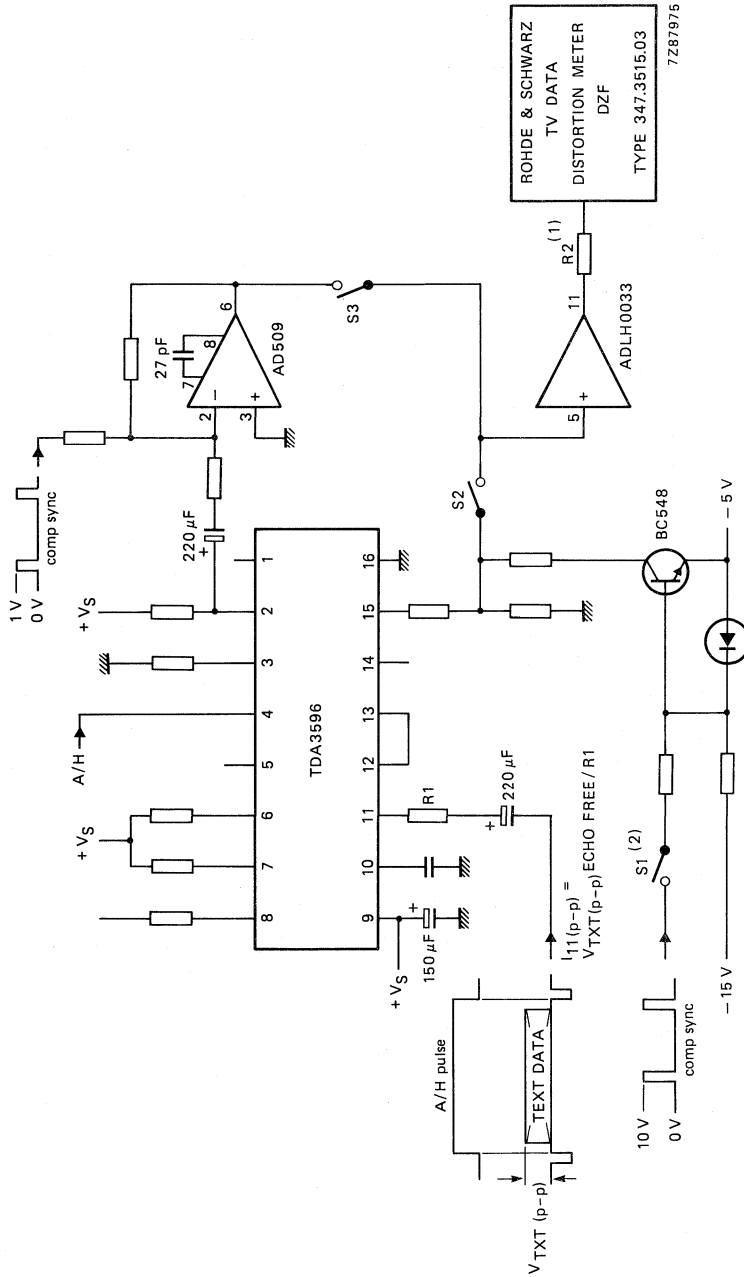


Fig. 2 Test set up TDA3596



## VERTICAL DEFLECTION CIRCUIT (90°)

The TDA3651 is a vertical deflection output circuit for drive of various deflection systems with deflection currents up to 1,5 A peak-to-peak.

The circuit incorporates the following functions:

- Driver
- Output stage
- Thermal protection and output stage protection
- Flyback generator
- Voltage stabilizer

### QUICK REFERENCE DATA

Supply voltage (pin 9)	$V_{9-4} = V_P$	0 to 50 V
Peak output voltage during flyback (pin 5)	$V_{5-4M} <$	55 V
Output current (peak-to-peak value)	$I_{5(p-p)} <$	1,5 A
Operating junction temperature	$T_j$ max.	150 °C

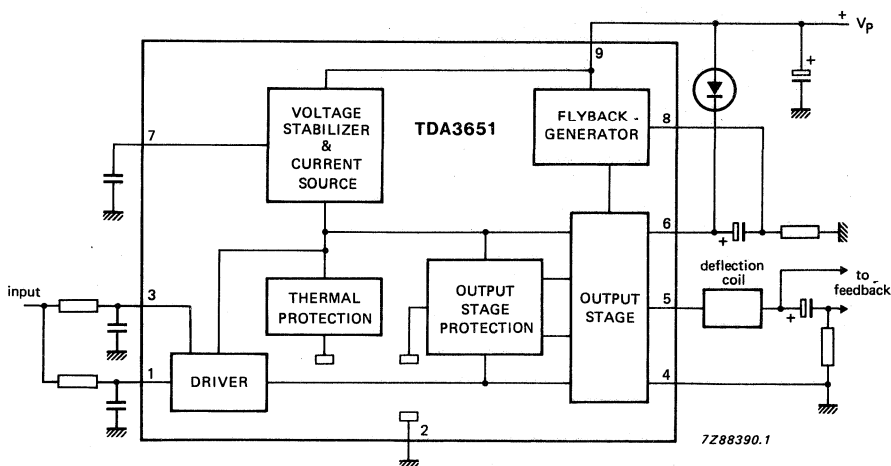


Fig. 1 Block diagram.

### PACKAGE OUTLINES

TDA3651: 9-lead SIL; plastic (SOT-110B).

TDA3651A: 9-lead SIL; plastic power (SOT-131).

TDA3651AQ: 9-lead SIL bent to DIL; plastic power (SOT-157).

## GENERAL DESCRIPTION

### Output stage and protection circuit

Pin 5 is the output pin. The supply for the output stage is fed to pin 6 and the output stage ground is connected to pin 4. The output transistors of the class-B output stage can each deliver 0,75 A maximum. The 'upper' power transistor is protected against short-circuit currents to ground, whereas, during flyback, the 'lower' power transistor is protected against too high voltages which may occur during adjustments.

Moreover, the output transistors have been given extra solidity by means of special measures in the internal circuit layout.

A thermal protection circuit is incorporated to protect the IC against too high dissipation. This circuit is 'active' at 175 °C and then reduces the deflection current to such a value that the dissipation cannot increase.

### Driver and switching circuit

Pin 1 is the input for the driver of the output stage. The signal at pin 1 is also applied via a resistor to pin 3 which is the input of a switching circuit. When the flyback starts, this switching circuit rapidly turns off the lower output stage and so limits the turn-off dissipation. It also allows a quick start of the flyback generator. Pin 3 is connected externally via resistors to pin 1 in order to allow for different applications in which pin 3 and pin 1 are driven separately.

### Flyback generator

The capacitor at pin 6 is charged to a maximum voltage, which is equal to the supply voltage  $V_p$  (pin 9), during scan.

When the flyback starts and the voltage at the output pin (pin 5) exceeds the supply voltage (pin 9), the flyback generator is activated. The  $V_p$  is connected in series (via pin 8) with the voltage across the capacitor.

The voltage at the supply pin (pin 6) of the output stage will then be maximum twice  $V_p$ . Lower voltages can be chosen by changing the value of the external resistor at pin 8.

### Voltage stabilizer

The internal voltage stabilizer provides a stabilized supply of 6 V for drive of the output stage, so the drive current of the output stage is not affected by supply voltage variations. The stabilized voltage is available at pin 7.

A decoupling capacitor of 2,2  $\mu$ F can be connected to this pin.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

**Voltages** (pins 4 and 2 externally connected to ground)

Output voltage (pin 5)	$V_{5-4}$	max.	55 V
Supply voltage (pin 9)	$V_{9-4} = V_P$	max.	50 V
Supply voltage output stage (pin 6)	$V_{6-4}$	max.	55 V
Input voltage (pins 1 and 3)	$V_{1-2}; V_{3-2}$	max.	$V_P$

**Currents**

Repetitive peak output current (pin 5)	$\pm I_{5RM}$	max.	0,75 A
Non-repetitive peak output current (pin 5)	$\pm I_{5SM}$	max.	1,5 A*
Repetitive peak flyback generator output current (pin 8)	$I_{8RM}$	max.	-0,75 A +0,85 A
Non-repetitive peak flyback generator output current (pin 8)	$I_{8SM}$	max.	-1,5 A +1,6 A*

**Temperatures**

Storage temperature range	$T_{stg}$	-65 to +150 °C
Operating ambient temperature range	$T_{amb}$	-25 to +65 °C
Operating junction temperature range	$T_j$	-25 to +150 °C

**CHARACTERISTICS** $T_{amb} = 25\text{ °C}$ ;  $V_P = 26\text{ V}$ ; pins 4 and 2 externally connected to ground; unless otherwise specified.

Output current (peak-to-peak value)	$I_5(p-p)$	typ. <	1,2 A 1,5 A
Flyback generator output current	$-I_8$	typ. <	0,7 A 0,85 A
Flyback generator output current	$I_8$	typ. <	0,6 A 0,75 A

**Output voltages**

Peak voltage during flyback	$V_{5-4M}$	<	55 V
Saturation voltage to supply at $-I_5 = 0,75\text{ A}$	$-V_{5-6sat}$	typ. <	2,5 V 3,0 V
Saturation voltage to ground at $I_5 = 0,75\text{ A}$	$V_{5-4sat}$	typ. <	2,5 V 3,0 V
Saturation voltage to supply at $-I_5 = 0,6\text{ A}$	$-V_{5-6sat}$	typ. <	2,2 V 2,7 V
Saturation voltage to ground at $I_5 = 0,6\text{ A}$	$V_{5-4sat}$	typ. <	2,2 V 2,7 V

\* Non-repetitive duty factor maximum 3,3%.

### Supply

Supply voltage	V <sub>9-2; 4</sub>	10 to 50 V*
Supply voltage output stage	V <sub>6-4</sub>	< 55 V*
Supply current (no load and no quiescent current)	I <sub>9</sub>	typ. 9 mA < 12 mA
Quiescent current (see Fig. 2)	I <sub>4</sub>	typ. 38 mA 25 to 52 mA
Variation of quiescent current with temperature	TC	typ. -0,04 mA/K

### Flyback generator

Saturation voltage at $-I_g = 0,85$ A	V <sub>9-8sat</sub>	typ. 1,6 V < 2,1 V
Saturation voltage at $I_g = 0,75$ A	V <sub>8-9sat</sub>	typ. 2,5 V < 3,0 V
Saturation voltage at $I_g = 0,7$ A	V <sub>9-8sat</sub>	typ. 1,4 V < 1,9 V
Saturation voltage at $I_g = 0,6$ A	V <sub>8-9sat</sub>	typ. 2,3 V < 2,8 V
Flyback generator active if:	V <sub>5-9</sub>	> 4 V
Leakage current	$-I_g$	typ. 5 $\mu$ A < 100 $\mu$ A
Input current for $\pm I_5 = 0,75$ A	I <sub>1</sub>	typ. 230 $\mu$ A 175 to 380 $\mu$ A
Input voltage during scan	V <sub>1-2</sub>	typ. 1,9 V 0,9 to 2,7 V
Input current during scan	I <sub>3</sub>	0,01 to 2,5 mA
Input voltage during scan	V <sub>3-2</sub>	0,9 to V <sub>p</sub> V
Input voltage during flyback	V <sub>3-2</sub>	0 to 0,2 V
Voltage at pin 7	V <sub>7-2</sub>	typ. 6,1 V 5,6 to 6,9 V
Load current of pin 7	I <sub>7</sub>	< 2 mA
Unloaded voltage at pin 7 during flyback	V <sub>7-2</sub>	typ. 15 V
Junction temperature of switching on the thermal protection	T <sub>j</sub>	typ. 175 °C 158 to 192 °C
Thermal resistance from crystal to mounting base TDA3651	R <sub>th c-mb</sub>	typ. 3 K/W < 4 K/W
TDA3651A; AQ	R <sub>th c-tab</sub>	typ. 10 K/W < 12 K/W
Power dissipation	see Fig. 3a or 3b	
Open loop gain at 1 kHz; R <sub>load</sub> = 1 k $\Omega$	G <sub>o</sub>	typ. 36 dB
Frequency response (-3 dB); R <sub>load</sub> = 1 k $\Omega$	f	typ. 60 kHz

\* Take care that during flyback the voltage at pin 5 does not exceed 55 V.



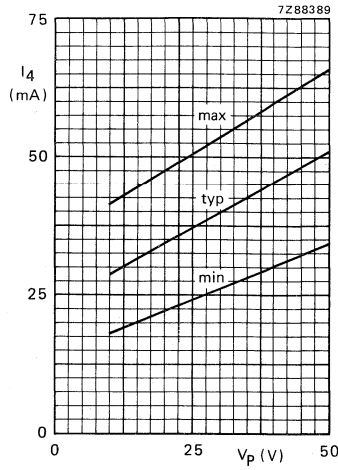


Fig. 2 Quiescent current  $I_4$  as a function of supply voltage  $V_p$ .

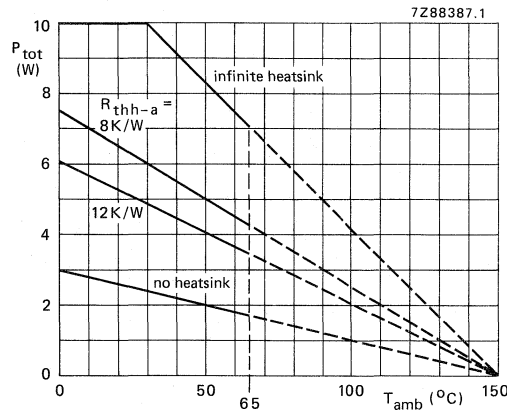


Fig. 3a Power derating curves TDA3651.

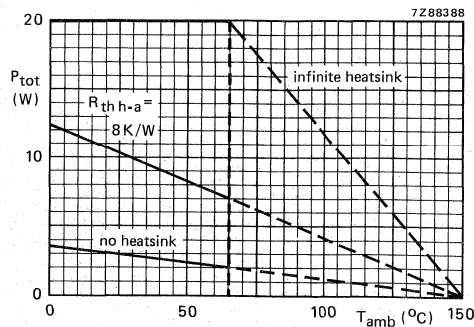


Fig. 3b Power derating curves TDA3651A; AQ.

**APPLICATION INFORMATION**

The following application data are measured in a typical application as shown in Figs 4 and 5.

Deflection current (including 6% overscan)  
peak-to-peak value

$I_5(p-p)$  typ. 0,87 A

Supply voltage

$V_{9-4}$  typ. 26 V

Total supply current

$I_{tot}$  typ. 148 mA

Peak output voltage during flyback

$V_{5-4M}$  < 50 V

Saturation voltage to supply

$V_{5-6sat}$  typ. 2,0 V  
< 2,5 V

Saturation voltage to ground

$V_{5-4sat}$  typ. 2,0 V  
< 2,5 V

Flyback time

$t_{fl}$  typ. 0,95 ms  
< 1,2 ms

Total power dissipation in IC

$P_{tot}$  typ. 2,5 W

Operating ambient temperature

$T_{amb}$  < 65 °C

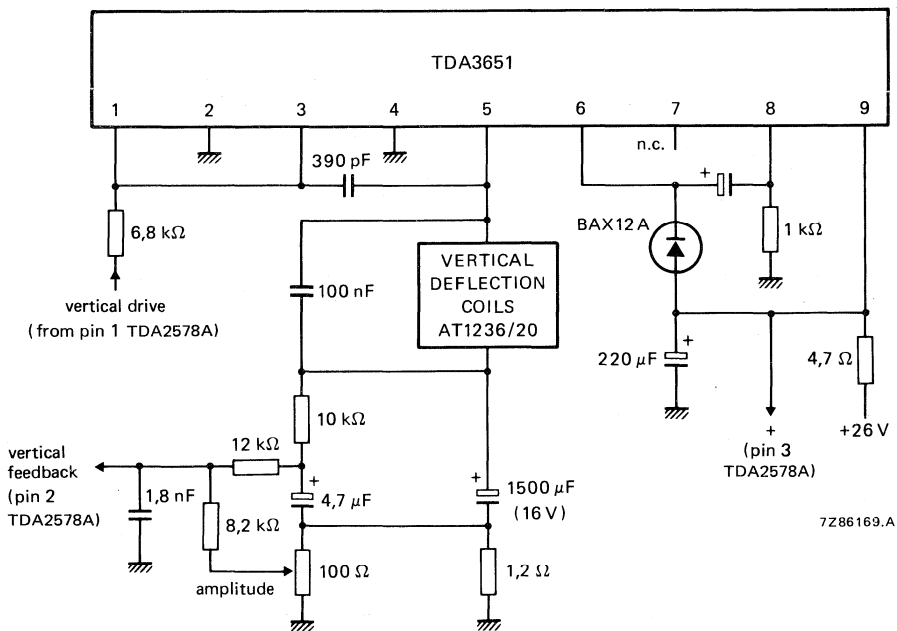


Fig. 4 Typical application circuit diagram of the TDA3651 (vertical output), when used in combination with the TDA2578A (see Fig. 5).

Note to deflection coils AT1236/20:  $L = 29$  mH,  $R = 13,6$  Ω; deflection current without overscan is 0,82 A peak-to-peak and EHT voltage is 25 kV.

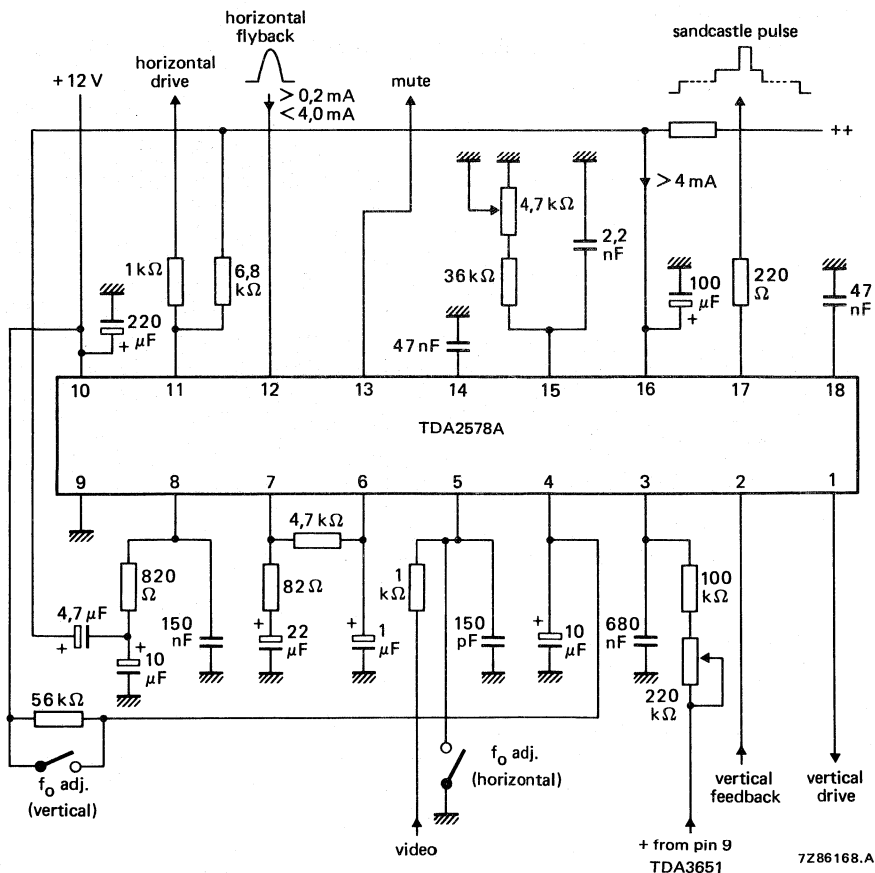


Fig. 5 Typical application circuit diagram; for combination of the TDA2578A with the TDA3651 (see Fig. 4).




Fig. 6 Circuit configuration at pin 14 for phase adjustment.

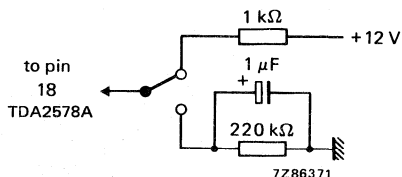


Fig. 7 Circuit configuration at pin 18 for VCR mode.  
1 kΩ resistor between pin 18 and + 12 V:  
without mute function.  
220 kΩ between pin 18 and ground:  
with mute function.

TDA3651  
TDA3651A  
TDA3651AQ

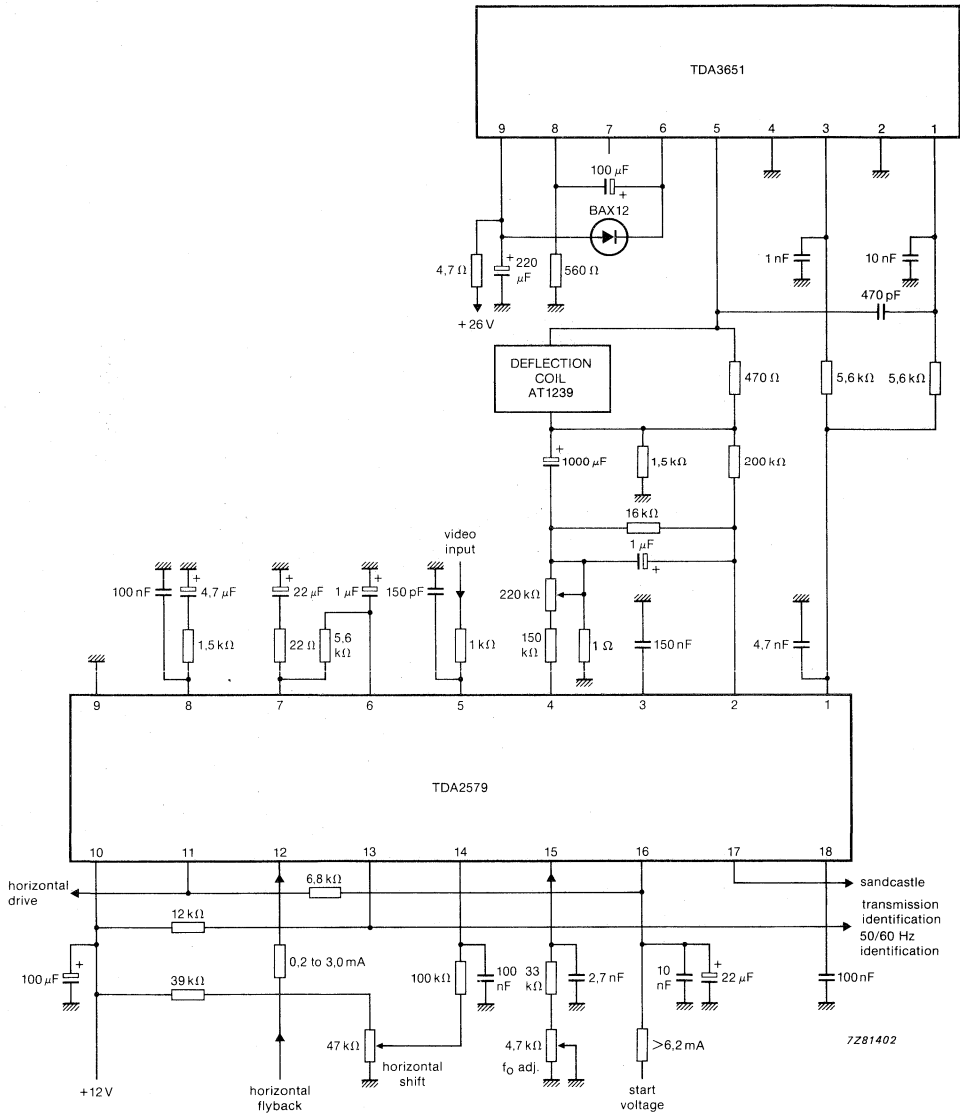


Fig. 8 Application circuit diagram for combination of TDA3651 with TDA2579.

## VERTICAL DEFLECTION CIRCUIT (110°)

### GENERAL DESCRIPTION

The TDA3652 is an integrated power output circuit for vertical deflection in systems with deflection currents up to 3 A peak to peak.

### Features

- Driver
- Output stage and protection circuits
- Flyback generator
- Voltage stabilizer

### QUICK REFERENCE DATA

Supply voltage (pin 9)	$V_{9-4} = V_P$	0 to 40 V
Peak output voltage during flyback (pin 5)	$V_{5-4M}$	< 55 V
Output current (peak-to-peak value)	$I_{5(p-p)}$	max. 3 A
Operating junction temperature	$T_j$	max. 150 °C
Thermal resistance from junction to mounting base	$R_{th j-mb}$	max. 4 K/W

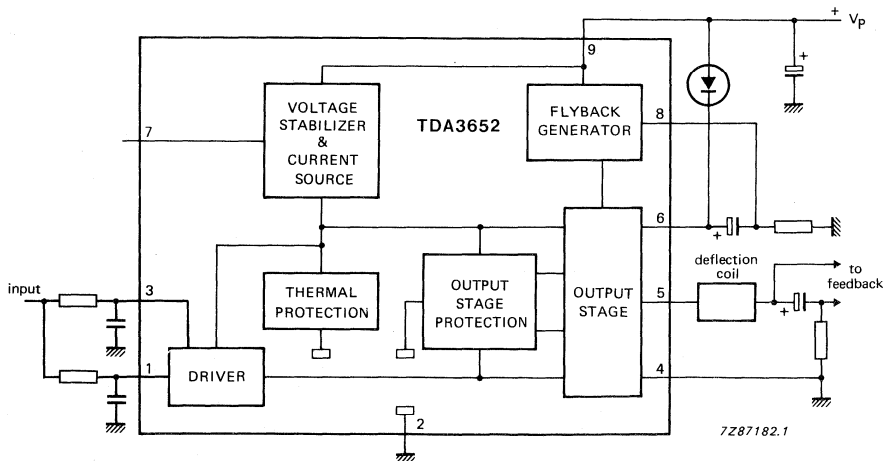


Fig. 1 Block diagram.

### PACKAGE OUTLINES

TDA3652: 9-lead SIL; plastic (SOT-131).

TDA3652Q: 9-lead SIL bent to DIL; plastic (SOT-157).

### RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

**Voltages** (pins 4 and 2 externally connected to ground)

Output voltage (pin 5)	$V_{5-4}$	0 to 55 V
Supply voltage (pin 9)	$V_{9-4} = V_P$	0 to 40 V
Supply voltage output stage (pin 6)	$V_{6-4}$	0 to 55 V
Driver input voltage (pin 1)	$V_{1-2}$	0 to $V_P$ V*
Switching circuit input voltage (pin 3)	$V_{3-2}$	0 to 5,6 V

### Currents

Repetitive peak output current (pin 5)	$\pm I_{5RM}$	max.	1,5 A
Non-repetitive peak output current (pin 5)	$\pm I_{5SM}$	max.	3 A**
Repetitive peak flyback generator output current (pin 8)	$I_{8RM}$	max.	-1,5 A +1,6 A
Non-repetitive peak flyback generator output current (pin 8)	$\pm I_{8SM}$	max.	3 A**

### Temperatures

Storage temperature range	$T_{stg}$	-65 to +150 °C
Operating ambient temperature range	$T_{amb}$	-25 to +65 °C
Operating junction temperature range	$T_j$	-25 to +150 °C

\* The maximum input voltage should not exceed the supply voltage ( $V_P$  at pin 9). In most applications pin 1 is connected to pin 3; the maximum input voltage should then not exceed 5,6 V.

\*\* Non-repetitive duty factor maximum 3,3%.

## CHARACTERISTICS

 $V_P = 26\text{ V}$ ;  $T_{\text{amb}} = 25\text{ °C}$ ; pins 4 and 2 externally connected to ground; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage; pin 9	$V_P$	10	—	40	V*
Supply voltage output stage; pin 6	$V_{6-4}$	—	—	55	V*
Supply current (no load and no quiescent current); pin 9	$I_P$	—	9	12	mA
Quiescent current (see Fig. 2)	$I_4$	25	40	65	mA
Variation of quiescent current with temperature	$\Delta I_4$	—	-0,04	—	mA/K
<b>Output current</b>					
Output current (pin 5) (peak-to-peak value)	$I_{5(p-p)}$	—	2,5	3,0	A
Output current flyback generator (pin 8)	$-I_8$	—	1,35	1,6	A
Output current flyback generator (pin 8)	$I_8$	—	1,25	1,5	A
<b>Output voltage</b>					
Peak voltage during flyback	$V_{5-4M}$	—	—	55	V
Saturation voltage to supply at $-I_5 = 1,5\text{ A}$	$-V_{5-6\text{sat}}$	2,0	2,6	3,3	V
Saturation voltage to ground at $I_5 = 1,5\text{ A}$	$V_{5-4\text{sat}}$	2,0	2,6	3,3	V
Saturation voltage to supply at $-I_5 = 1\text{ A}$	$-V_{5-6\text{sat}}$	1,7	2,2	2,7	V
Saturation voltage to ground at $I_5 = 1\text{ A}$	$V_{5-4\text{sat}}$	1,7	2,2	2,7	V
<b>Flyback generator</b>					
Saturation voltage at $-I_8 = 1,6\text{ A}$	$V_{9-8\text{sat}}$	0,9	1,5	2,1	V
Saturation voltage at $I_8 = 1,5\text{ A}$	$V_{8-9\text{sat}}$	1,1	2,5	3,0	V
Saturation voltage at $-I_8 = 1,1\text{ A}$	$V_{9-8\text{sat}}$	0,6	1,4	1,9	V
Saturation voltage at $I_8 = 1\text{ A}$	$V_{8-9\text{sat}}$	0,9	2,3	2,8	V
Flyback generator active if:	$V_{5-9}$	4	—	—	V
Leakage current at pin 8	$-I_8$	—	5	100	$\mu\text{A}$
Input current for $I_5 = 4\text{ A}$ at pin 1 (peak-to-peak value)	$I_{1(p-p)}$	190	240	400	$\mu\text{A}$
Input voltage during scan (pin 1)	$V_{1-2}$	1,3	2,0	3,5	V
Input current during scan (pin 3)	$I_3$	0,01	—	1,0	mA

\* The maximum supply voltage should be chosen such that during flyback the voltage at pin 5 does not exceed 55 V.

CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Flyback generator (continued)</b>					
Input voltage during scan (pin 3)	$V_{3\ 2}$	0,9	—	5,6	V
Input voltage during flyback (pin 3)	$V_{3-2}$	0	—	0,2	V
<b>General data</b>					
Junction temperature of switching on the thermal protection	$T_j$	158	175	192	°C
Thermal resistance from junction to mounting base	$R_{th\ j-mb}$	—	—	4	K/W
Total power dissipation	$P_{tot}$	see Fig. 3			
Open-loop gain at 1 kHz	$G_o$	—	36	—	dB
Frequency response (−3 dB) at $R_L = 1\ k\Omega$	f	—	50	—	kHz

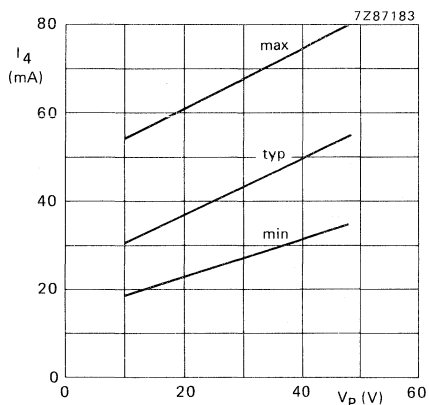


Fig. 2 Quiescent current ( $I_4$ ) as a function of supply voltage ( $V_p$ ).

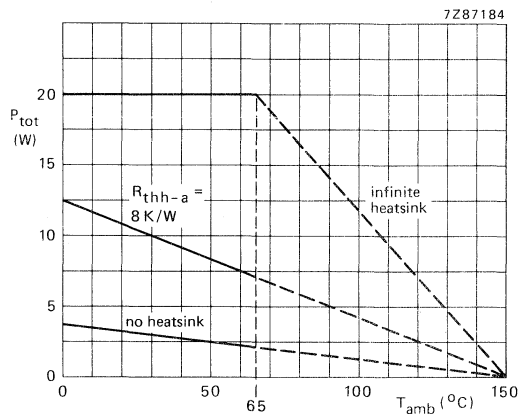


Fig. 3 Power derating curve.



**APPLICATION INFORMATION**

The function is described against the corresponding pin number.

**1. Driver**

This is the input for the driver of the output stage.

**2. Negative supply (ground)****3. Switching circuit**

This pin is normally connected via external resistors to pin 1. It is also possible to use this pin to drive the switching circuit for different applications. This switching circuit rapidly turns off the lower output stage at the end of scan and also allows for a quick start of the flyback generator.

**4. Output stage ground****5 and 6. Output stage and protection circuits**

Pin 5 is the output pin and pin 6 is the output stage supply pin. The output stage is a class-B type with each transistor capable of delivering 1,5 A maximum. The "upper" output transistor is protected against short-circuit currents to ground. The base of the "lower" power transistor is connected to ground during flyback and so it is protected against too high flyback pulses which may occur during adjustments. In addition the output transistors are protected by a special layout of the internal circuit. The circuit is protected thermally against excessive dissipation by a circuit which operates at temperatures of 175 °C upwards causing the output current to drop to a value such that the dissipation cannot increase.

**7. Voltage stabilizer**

The internal voltage stabilizer provides a stabilized supply voltage of 6 V for drive of the output stage, so the drive current is not influenced by the various voltages of different applications.

**8 and 9. Flyback generator**

Pin 8 is the output pin of the flyback generator. Depending on the value of the external resistor at pin 8, the capacitor at pin 6 will be charged to a fixed level during the scan period. The maximum height of this level is equal to the supply voltage at pin 9 ( $V_p$ ). When the flyback starts and the flyback pulse at pin 5 exceeds the supply voltage, the flyback generator is activated and then the supply voltage is connected in series (via pin 8) with the voltage across the capacitor. The voltage at the supply pin (pin 6) of the output stage will then be not more than twice the supply voltage.

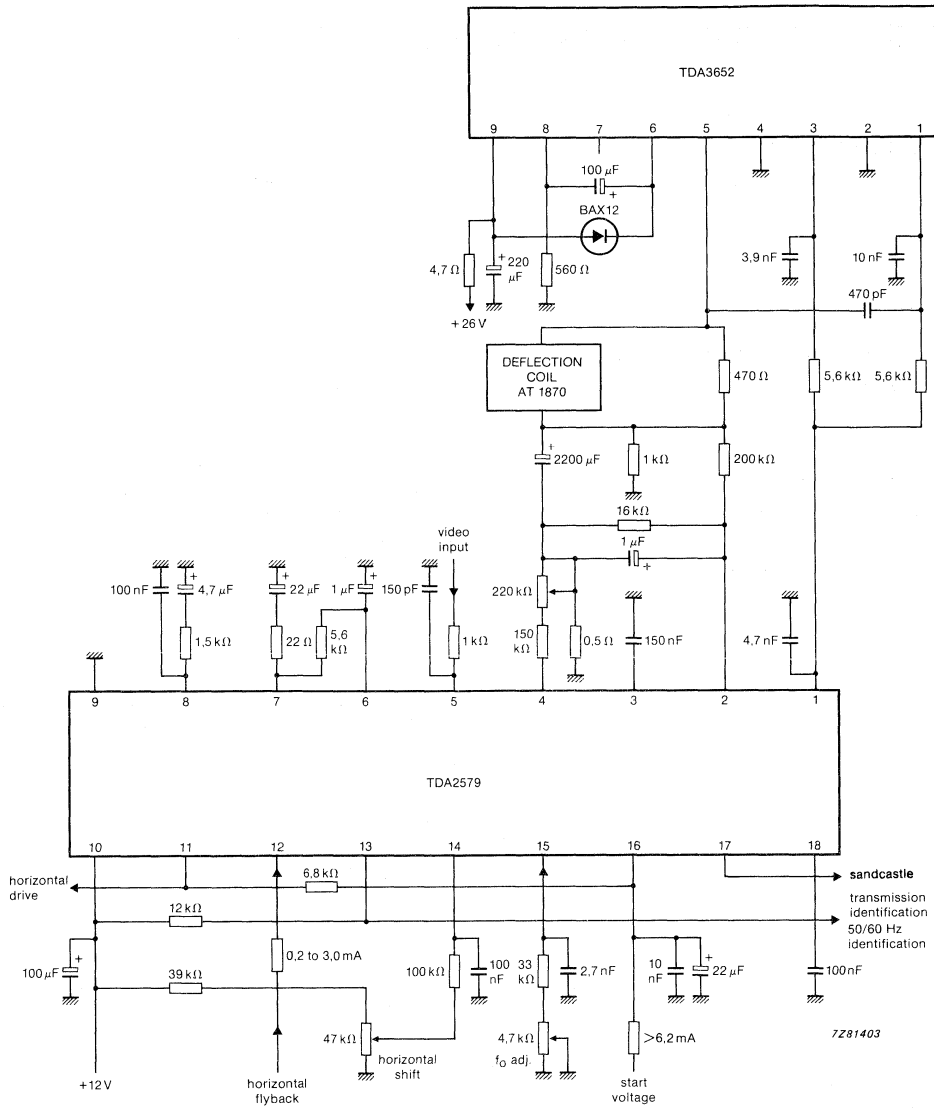


Fig. 4 Application circuit diagram in combination with TDA2579.

## VERTICAL DEFLECTION AND GUARD CIRCUIT (90°)

### GENERAL DESCRIPTION

The TDA3653 is a vertical deflection output circuit for drive of various deflection systems with currents up to 1,5 A peak-to-peak.

### Features

- Driver
- Output stage
- Thermal protection and output stage protection
- Flyback generator
- Voltage stabilizer
- Guard circuit

### QUICK REFERENCE DATA

Supply voltage range (pin 9)	$V_P = V_{9-4}$	0 to 40 V
Peak output voltage during flyback (pin 5)	$V_{5-4M}$	max. 60 V
Output current (peak-to-peak value)	$I_5(p-p)$	max. 1,5 A
Operating junction temperature	$T_j$	max. 150 °C
Thermal resistance from junction to mounting base (SOT-110B)	$R_{th\ j-mb}$	typ. 10 K/W
(SOT-131B)	$R_{th\ j-mb}$	typ. 3,5 K/W

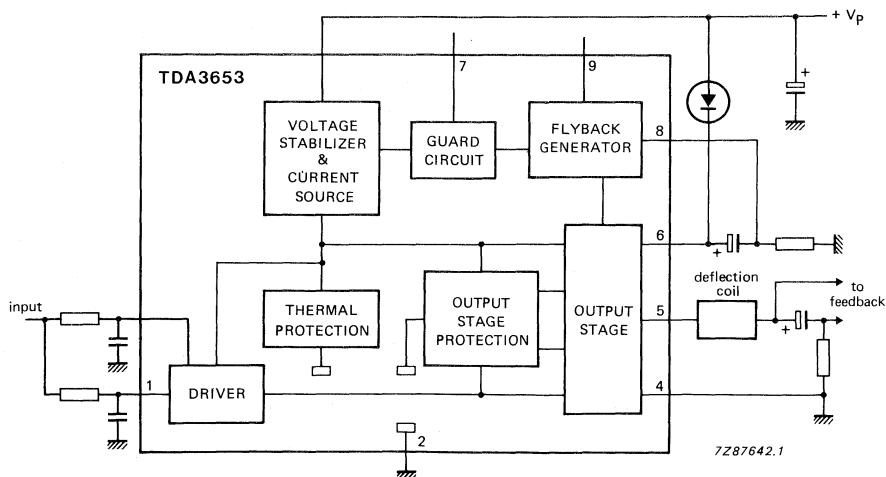


Fig. 1 Block diagram.

### PACKAGE OUTLINES

TDA3653: 9-lead SIL; plastic (SOT-110B).

TDA3653A: 9-lead SIL; plastic power (SOT-131).

## FUNCTIONAL DESCRIPTION

### Output stage and protection circuit

Pin 5 is the output pin. The supply for the output stage is fed to pin 6 and the output stage ground is connected to pin 4. The output transistors of the class-B output stage can each deliver 0,75 A maximum. The maximum voltage for pin 5 and 6 is 60 V.

The output power transistors are protected such that their operation remains within the SOAR area. This is achieved by the co-operation of the thermal protection circuit, the current-voltage detector, the short-circuit protection and the special measures in the internal circuit layout.

### Driver and switching circuit

Pin 1 is the input for the driver of the output stage. The signal at pin 1 is also applied via external resistors to pin 3 which is the input of a switching circuit. When the flyback starts, this switching circuit rapidly turns off the lower output stage and so limits the turn-off dissipation. It also allows a quick start of the flyback generator.

External connection of pin 1 to pin 3 allows for applications in which the pins are driven separately.

### Flyback generator

During scan the capacitor at pin 6 is charged to a maximum voltage, which is dependent on the value of the resistor at pin 8. During normal operation the voltage at pin 8 may not be lower than 2,2 V.

When the flyback starts and the voltage at the output pin (pin 5) exceeds the supply voltage (pin 9), the flyback generator is activated. Then  $V_p = 2 \text{ V}$  is connected in series (via pin 8) with the voltage across the capacitor.

The voltage at the supply pin (pin 6) of the output stage will then be maximum  $2V_p - 2 \text{ V}$ . Lower voltages can be obtained, determined by the value of the resistor at pin 8.

### Guard circuit

When there is no deflection current and the flyback generator is not activated, the voltage at pin 8 reduces to less than 2 V. The guard circuit will then produce a d.c. voltage at pin 7, which can be used to blank the picture tube and thus prevent screen damage.

### Voltage stabilizer

The internal voltage stabilizer provides a stabilized supply of 6 V to drive the output stage, which prevents the drive current of the output stage being affected by supply voltage variations.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134); pins 4 and 2 externally connected to ground.

Supply voltage (pin 9)	$V_P = V_{9-4}$	max.	40 V
Supply voltage output stage (pin 6)	$V_{6-4}$	max.	60 V
Output voltage (pin 5)	$V_{5-4}$	max.	60 V
Input voltage (pins 1 and 3)	$V_{1;3-2}$	max.	$V_P$ V
External voltage at pin 7	$V_{7-2}$	max.	5,6 V
Peak output current (pin 5)			
repetitive	$\pm I_{5RM}$	max.	0,75 A
non-repetitive	$\pm I_{5SM}$	max.	1,5 A*
Peak output current (pin 8)			
repetitive	$I_{8RM}$	max.	-0,85 to +0,75 A
non-repetitive	$\pm I_{8SM}$	max.	1,5 A*
Total power dissipation	$P_{tot}$		see Fig. 2
Storage temperature range	$T_{stg}$		-65 to +150 °C
Operating ambient temperature range	$T_{amb}$		see Fig. 2
Operating junction temperature range	$T_j$		-25 to +150 °C

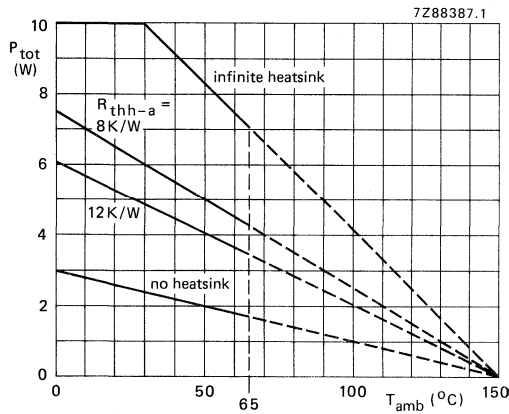


Fig. 2 Power derating curves (for SOT-110B).

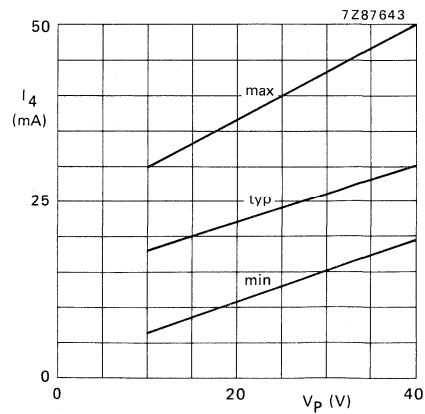


Fig. 3 Quiescent current  $I_4$  as a function of supply voltage  $V_P$ .

\* Non-repetitive duty factor maximum 3,3%.

**CHARACTERISTICS**

$V_P = V_{9-4} = 26 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; pins 2 and 4 externally connected to ground; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage; pin 9 (note 1)	$V_P = V_{9-4}$	10	—	40	V
Supply voltage; pin 6 (note 1)	$V_{6-4}$	—	—	60	V
Supply current; pin 9 (note 2)	$I_P = I_9$	—	10	20	mA
Quiescent current; pin 4 (see Fig. 3)	$I_4$	6	25	40	mA
Variation of quiescent current with temperature	$\Delta I_4$	—	-0,04	—	mA/K
<b>Output current</b>					
Output current (pin 5) (peak-to-peak value)	$I_{5(p-p)}$	—	1,2	1,5	A
Output current flyback generator (pin 8)	$-I_8$	—	0,7	0,85	A
Output current flyback generator (pin 8)	$I_8$	—	0,6	0,75	A
<b>Output voltage</b>					
Peak voltage during flyback	$V_{5-4M}$	—	—	60	V
<b>Saturation voltage to supply</b>					
at $-I_5 = 0,75 \text{ A}$	$V_{6-5\text{sat}}$	—	2,5	3,0	V
at $I_5 = 0,75 \text{ A}$ (note 3)	$V_{5-6\text{sat}}$	—	2,5	3,0	V
at $-I_5 = 0,6 \text{ A}$	$V_{6-5\text{sat}}$	—	2,2	2,7	V
at $I_5 = 0,6 \text{ A}$ (note 3)	$V_{5-6\text{sat}}$	—	2,3	2,8	V
<b>Saturation voltage to ground</b>					
at $I_5 = 0,75 \text{ A}$	$V_{5-4\text{sat}}$	—	2,0	2,5	V
at $I_5 = 0,6 \text{ A}$	$V_{5-4\text{sat}}$	—	1,7	2,2	V
<b>Flyback generator</b>					
<b>Saturation voltage</b>					
at $-I_8 = 0,85 \text{ A}$	$V_{9-8\text{sat}}$	—	1,6	2,1	V
at $I_8 = 0,75 \text{ A}$ (note 3)	$V_{8-9\text{sat}}$	—	2,3	2,8	V
at $-I_8 = 0,7 \text{ A}$	$V_{9-8\text{sat}}$	—	1,4	1,9	V
at $I_8 = 0,6 \text{ A}$ (note 3)	$V_{8-9\text{sat}}$	—	2,2	2,7	V
Flyback generator active if:	$V_{5-9}$	4	—	—	V
Leakage current at pin 8	$-I_8$	—	5	100	$\mu\text{A}$
Input current (pin 1) at $I_{5(p-p)} = 1,5 \text{ A}$	$I_1$	—	—	1,3	mA
Input voltage during scan (pin 1)	$V_{1-2}$	—	—	3,2	V
Input voltage during scan (pin 3) pins 1 and 3 not connected	$V_{3-2}$	0,9	—	$V_P$	V

parameter	symbol	min.	typ.	max.	unit
Input current during scan (pin 3) pins 1 and 3 not connected	$I_3$	0,01	—	—	mA
Input current during scan (pin 3) pins 1 and 3 connected	$I_3$	—	—	0,52	mA
Input resistance (pin 3)	$R_3$	3,75	5,0	6,25	k $\Omega$
Input voltage during flyback (pin 1)	$V_{1-2}$	—	—	250	mV
Input voltage during flyback (pin 3)	$V_{3-2}$	—	—	250	mV
<b>Guard circuit</b>					
Output voltage; pin 7 (note 4) loaded with 100 k $\Omega$	$V_{7-2}$	4,4	5,0	5,8	V
loaded with 0,5 mA	$V_{7-2}$	3,5	4,4	5,3	V
Internal series resistance of pin 7	$R_{i7}$	0,9	1,2	1,7	k $\Omega$
Guard circuit active if $V_{8-2}$ is lower than (note 6)	$V_{8-2}$	—	—	2,0	V
<b>General data</b>					
Thermal protection becomes active if junction temperature exceeds	$T_j$	158	175	192	$^{\circ}\text{C}$
Thermal resistance junction to mounting base	$R_{th\ j-mb}$	—	10	12	K/W
Open loop gain at 1 kHz (note 5)	$G_o$	—	42	—	dB
Frequency response (–3 dB) (note 7)	$f$	—	40	—	kHz

**Notes to the characteristics**

1. The maximum supply voltage should be chosen such that during flyback the voltage at pin 5 does not exceed 60 V.
2. These values are obtained (pin 9) at no load and no quiescent current.
3. Duty factor maximum 3,3%.
4. Guard circuit is active.
5.  $R_{load} = 8\ \Omega$ ;  $I_{load(rms)} = 125\ \text{mA}$ .
6. During normal operation the voltage  $V_{8-2}$  may not be lower than 2,5 V.
7. With 220 pF between pins 1 and 5.

APPLICATION INFORMATION

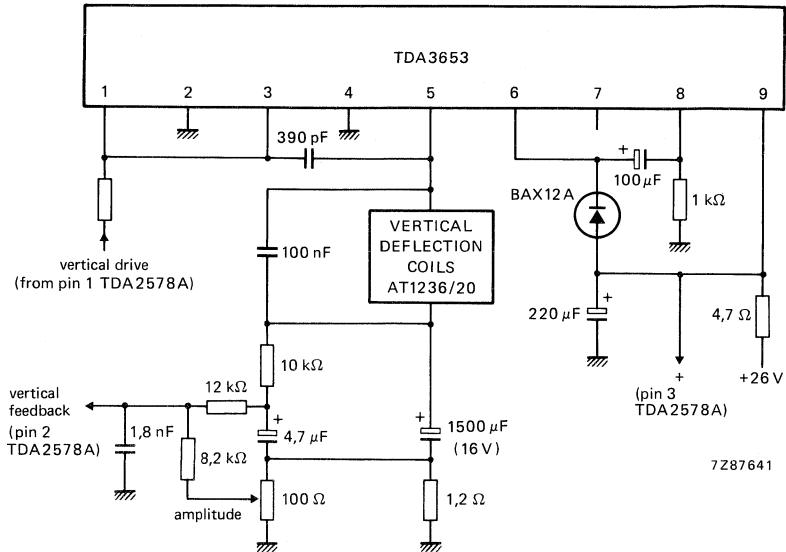


Fig. 4 Typical application circuit diagram of the TDA3653 (vertical output), when used in combination with the TDA2578A (see Fig. 5).

Note to deflection coils AT1236/20:  $L = 29 \text{ mH}$ ,  $R = 13,6 \Omega$ ; deflection current without overscan is 0,82 A peak-to-peak and e.h.t. voltage is 25 kV.



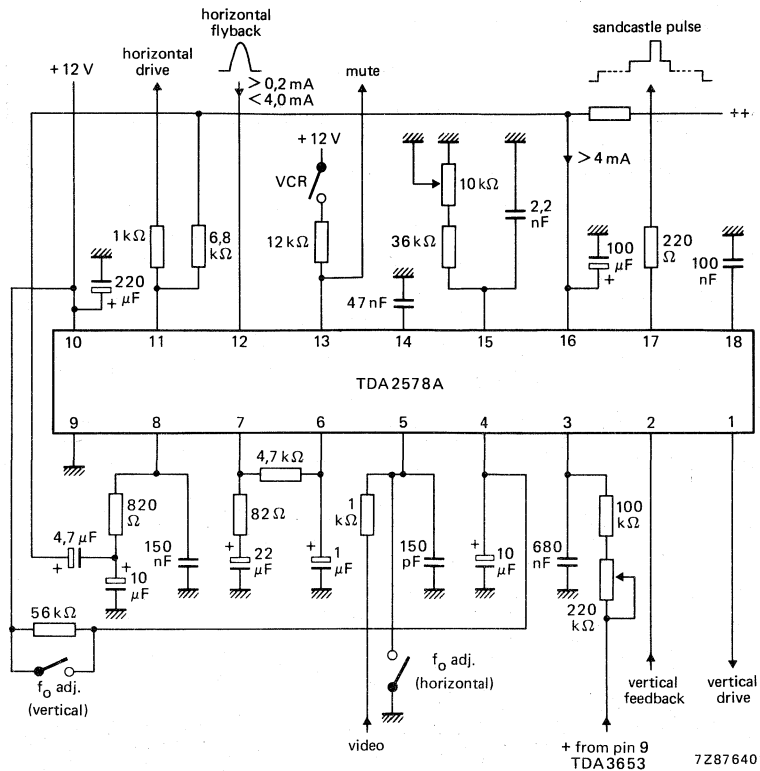


Fig. 5 Typical application circuit diagram; for combination of the TDA2578A with the TDA3653 (see Fig. 4).

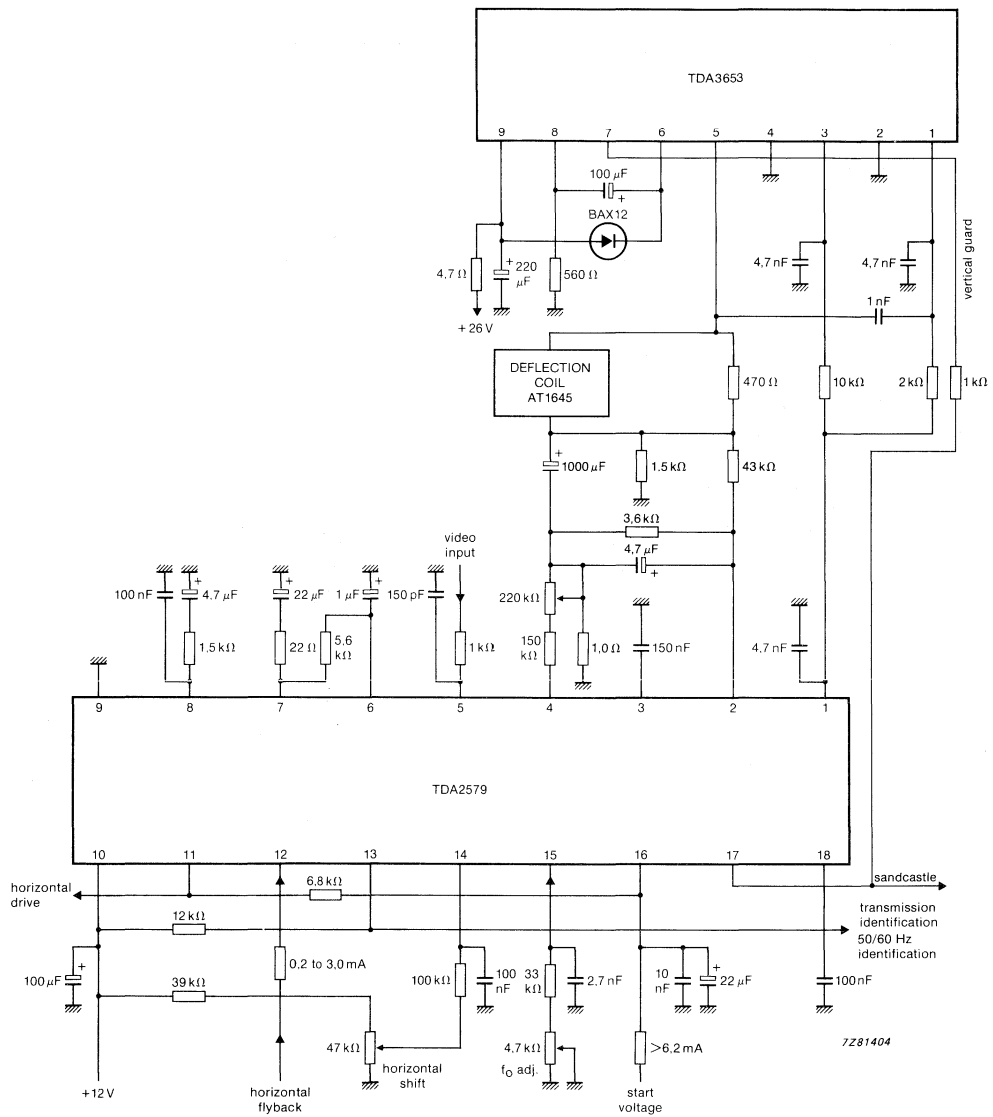


Fig. 6 Application circuit diagram for combination with TDA2579 for 90° picture tube.

## VERTICAL DEFLECTION AND GUARD CIRCUIT (110°)

### GENERAL DESCRIPTION

The TDA3654 is a full performance vertical deflection output circuit for direct drive of the deflection coils and can be used for a wide range of 90° and 110° deflection systems.

A guard circuit is provided which blanks the picture tube screen in the absence of deflection current.

### Features

- Direct drive to the deflection coils
- 90° and 110° deflection system
- Internal blanking guard circuit
- Internal voltage stabilizer

### QUICK REFERENCE DATA

Output voltage	V <sub>5-2</sub>	max.	60 V
Output current (peak-to-peak)	I <sub>5(p-p)</sub>	max.	3 A
Supply voltage	V <sub>9-2</sub>	max.	40 V
Guard circuit output voltage	V <sub>7-2</sub>	max.	5,6 V
Operating ambient temperature range	T <sub>amb</sub>		-25 to +60 °C
Storage temperature	T <sub>stg</sub>		-65 to +150 °C

### THERMAL RESISTANCE

From junction to mounting base	R <sub>th j-mb</sub>	3,5 to 4 K/W
--------------------------------	----------------------	--------------

### PACKAGE OUTLINES

TDA3654 : 9-lead SIL; plastic power (SOT-131).

TDA3654Q : 9-lead SIL bent to DIL; plastic power (SOT-157).

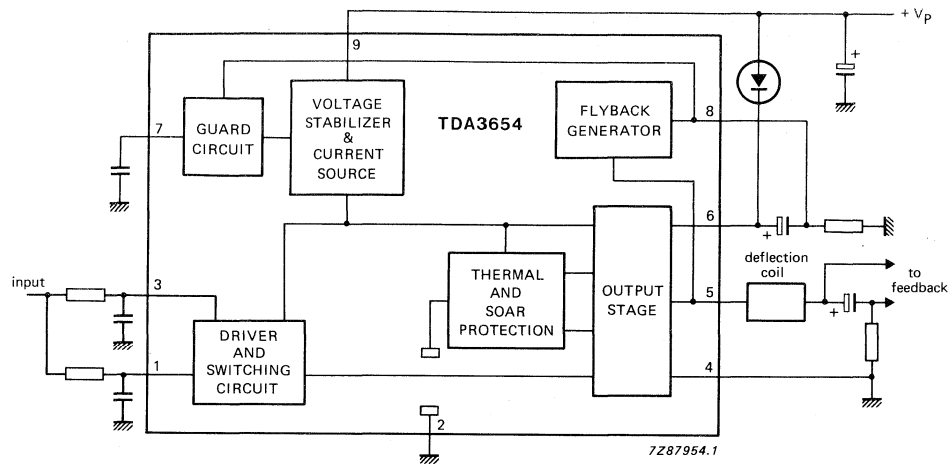


Fig. 1 Block diagram.

## FUNCTIONAL DESCRIPTION

### Output stage and protection circuits

The output stage consists of two Darlington configurations in class B arrangement.

Each output transistor can deliver 1,5 A maximum and the  $V_{CE0}$  is 60 V.

Protection of the output stage is such that the operation of the transistors remains well within the SOAR area in all circumstances at the output pin, (pin 5). This is obtained by the cooperation of the thermal protection circuit, the current-voltage detector and the short circuit protection.

Special measures in the internal circuit layout give the output transistors extra solidity, this is illustrated in Fig. 5 where typical SOAR curves of the lower output transistor are given. The same curves also apply for the upper output device. The supply for the output stage is fed to pin 6 and the output stage ground is connected to pin 4.

### Driver and switching circuit

Pin 1 is the input for the driver of the output stage. The signal at pin 1 is also applied to pin 3 which is the input of a switching circuit (pin 1 and 3 are connected via external resistors).

This switching circuit rapidly turns off the lower output stage when the flyback starts and it, therefore, allows a quick start of the flyback generator. The maximum required input signal for the maximum output current peak-to-peak value of 3 A is only 3 V, the sum of the currents in pins 1 and 3 is then maximum 1 mA.

### Flyback generator

During scan, the capacitor between pins 6 and 8 is charged to a level which is dependent on the value of the resistor at pin 8 (see Fig. 1).

When the flyback starts and the voltage at the output pin (pin 5) exceeds the supply voltage, the flyback generator is activated.

The supply voltage is then connected in series, via pin 8, with the voltage across the capacitor during the flyback period.

This implies that during scan the supply voltage can be reduced to the required scan voltage plus saturation voltage of the output transistors.

The amplitude of the flyback voltage can be chosen by changing the value of the external resistor at pin 8.

It should be noted that the application is chosen such that the lowest voltage at pin 8 is  $> 1,5$  V, during normal operation.

### Guard circuit

When there is no deflection current, for any reason, the voltage at pin 8 becomes less than 1 V, the guard circuit will produce a d.c. voltage at pin 7. This voltage can be used to blank the picture tube, so that the screen will not burn in.

### Voltage stabilizer

The internal voltage stabilizer provides a stabilized supply of 6 V to drive the output stage, so the drive current is not affected by supply voltage variations.

### RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134).  
Pins 2 and 4 are externally connected to ground.

#### Voltages

Output voltage	$V_{5-4}$	0 to 60	V
Supply voltage	$V_{9-4}$	0 to 40	V
Supply voltage output stage	$V_{6-4}$	0 to 60	V
Input voltage	$V_{1-2}$	0 to $V_{9-4}$	V
Input voltage switching circuit	$V_{3-2}$	0 to $V_{9-4}$	V
External voltage at pin 7	$V_{7-2}$	0 to 5,6	V

#### Currents

Repetitive peak output current	$\pm I_{5RM}$	max.	1,5 A
Non-repetitive peak output current (note 1)	$\pm I_{5SM}$	max.	3 A
Repetitive peak output current of flyback generator	$I_{8RM}$	max.	+ 1,5 A - 1,6 A
Non-repetitive peak output current of flyback generator (note 1)	$\pm I_{8SM}$	max.	3 A

#### Temperatures

Storage temperature range	$T_{stg}$	-65 to + 150	°C
Operating ambient temperature range (see Fig. 3)	$T_{amb}$	-25 to + 60	°C
Operating junction temperature range	$T_j$	-25 to + 150	°C

## CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , supply voltage ( $V_{9.4}$ ) = 26 V; unless otherwise stated; pin 1 externally connected to pin 3.  
Pins 2 and 4 externally connected to ground.

parameter	symbol	min.	typ.	max.	unit	
<b>Supply</b>						
Supply voltage, pin 9 (note 2)	$V_{9.4}$	10	—	40	V	
Supply voltage output stage	$V_{6.4}$	—	—	60	V	
Supply current, pins 6 and 9 (note 3)	$I_6 + I_9$	35	55	85	mA	
Quiescent current (note 4)	$I_4$	25	40	65	mA	
Variation of quiescent current with temperature	TC	—	-0,04	—	mA/K	
<b>Output current</b>						
Output current, pin 5 (peak-to-peak)	$I_5(p-p)$	—	2,5	3	A	
Output current flyback generator, pin 8	$+ I_8(p-p)$	—	1,25	1,5	A	
	$- I_8(p-p)$	—	1,35	1,6	A	
<b>Output voltage</b>						
Peak voltage during flyback	$V_{5.4}$	—	—	60	V	
Saturation voltage to supply at $I_5 = -1,5\text{ A}$	$V_{6.5(sat)}$		2,5	3,2	V	
	at $I_5 = 1,5\text{ A}$ (note 5)	$V_{5.6(sat)}$	2,5	3,2	V	
	at $I_5 = -1,2\text{ A}$	$V_{6.5(sat)}$	2,2	2,7	V	
	at $I_5 = 1,2\text{ A}$ (note 5)	$V_{5.6(sat)}$	2,3	2,8	V	
Saturation voltage to ground at $I_5 = 1,2\text{ A}$	$V_{5.4(sat)}$	—	2,2	2,7	V	
	at $I_5 = 1,5\text{ A}$	$V_{5.4(sat)}$	—	2,5	3,2	V
<b>Flyback generator</b>						
Saturation voltage at $I_8 = -1,6\text{ A}$	$V_{9.8(sat)}$	—	1,6	2,1	V	
	at $I_8 = 1,5\text{ A}$ (note 5)	$V_{8.9(sat)}$	—	2,3	3	V
	at $I_8 = -1,3\text{ A}$	$V_{9.8(sat)}$	—	1,4	1,9	V
	at $I_8 = 1,2\text{ A}$ (note 5)	$V_{8.9(sat)}$	—	2,2	2,7	V
Leakage current at pin 8	$-I_8$	—	5	100	$\mu\text{A}$	
Flyback generator active if:	$V_{5.9}$	4	—	—	V	

CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Input</b>					
Input current, pin 1, for $I_5 = 1,5$ A	$I_1$	—	0,33	0,55	mA
Input voltage during scan, pin 1	$V_{1-2}$	—	2,35	3	V
Input current, pin 3, during scan (note 6)	$I_3$	0,03	—	—	mA
Input voltage, pin 3, during scan (note 6)	$V_{3-2}$	0,8	—	$V_{9-4}$	V
Input voltage, pin 1, during flyback	$V_{1-2}$	—	—	250	mV
Input voltage, pin 3, during flyback	$V_{3-2}$	—	—	250	mV
<b>Guard circuit</b>					
Output voltage, pin 7 $R_L = 100$ k $\Omega$ (note 9)	$V_{7-2}$	4,1	4,5	5,8	V
Output voltage, pin 7 at $I_L = 0,5$ mA (note 9)	$V_{7-2}$	3,4	3,9	5,3	V
Internal series resistance of pin 7	$R_{i7}$	0,95	1,35	1,7	k $\Omega$
Guard circuit activates (note 7)	$V_{8-2}$	—	—	1,0	V
<b>General data</b>					
Thermal protection activation range	$T_j$	158	175	192	$^{\circ}$ C
<b>Thermal resistance</b>					
From junction to mounting base	$R_{th\ j-mb}$	—	3,5	4	K/W
Power dissipation	$P_{tot}$	—	see Fig. 3		
Open loop gain at 1 kHz; (note 8)	$G_o$	—	33	—	
Frequency response, —3 dB; (note 10)	f	—	60	—	kHz



**Notes to the characteristics**

1. Non-repetitive duty factor 3,3%.
2. The maximum supply voltage should be chosen so that during flyback the voltage at pin 5 does not exceed 60 V.
3. When  $V_{5,4}$  is 13 V and no load at pin 5.
4. See Fig. 4.
5. Duty cycle,  $d = 5\%$  or  $d = 0,05$ .
6. When pin 3 is driven separately from pin 1.
7. During normal operation the voltage  $V_{8,2}$  may not be lower than 1,5 V.
8.  $R_L = 8 \Omega$ ;  $I_L = 125 \text{ mA}$  (r.m.s.).
9. If guard circuit is active.
10. With a 22 pF capacitor between pins 1 and 5.

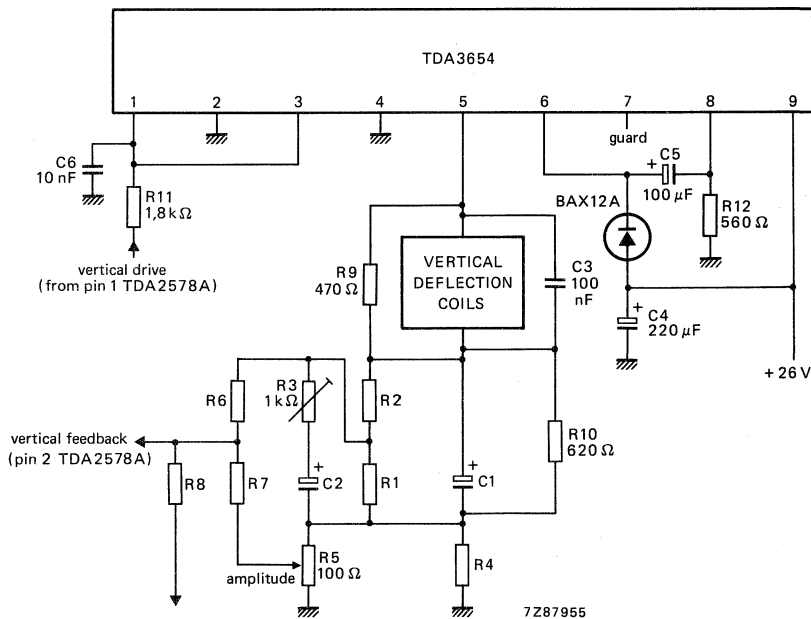


Fig. 2 Application diagram.

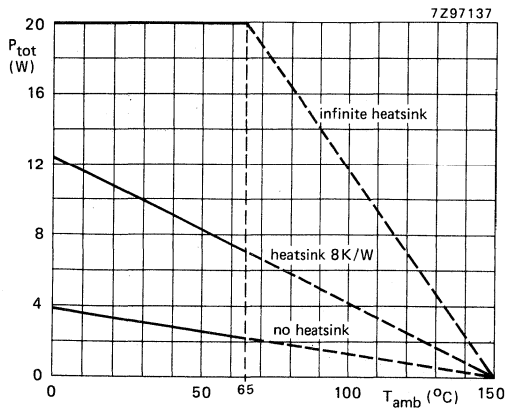


Fig. 3 Power derating curve.



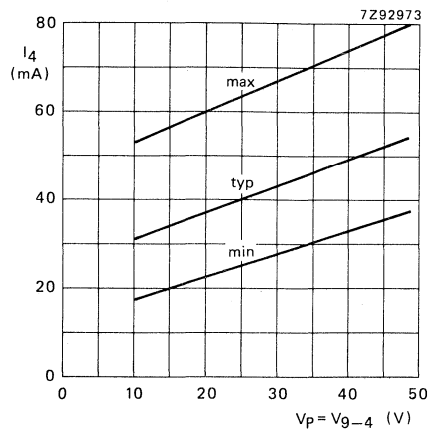


Fig. 4 Quiescent current as a function of the supply voltage.

curve	$t_p$	$\delta$	peak junction temperature
1	d.c.	—	150 °C
2	10 ms	0,5	150 °C
3	10 ms	0,25	150 °C
4	1 ms	0,5	150 °C
5	1 ms	0,25	150 °C
6	1 ms	0,05	150 °C
7	1 ms	0,05	180 °C
8	0,2 ms	0,1	150 °C
9	0,2 ms	0,1	180 °C

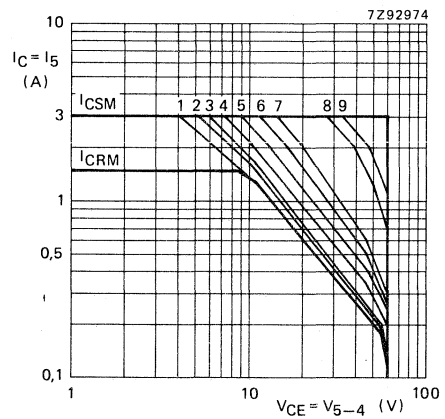

7Z92975

Fig. 5 Typical SOAR of lower output transistor.

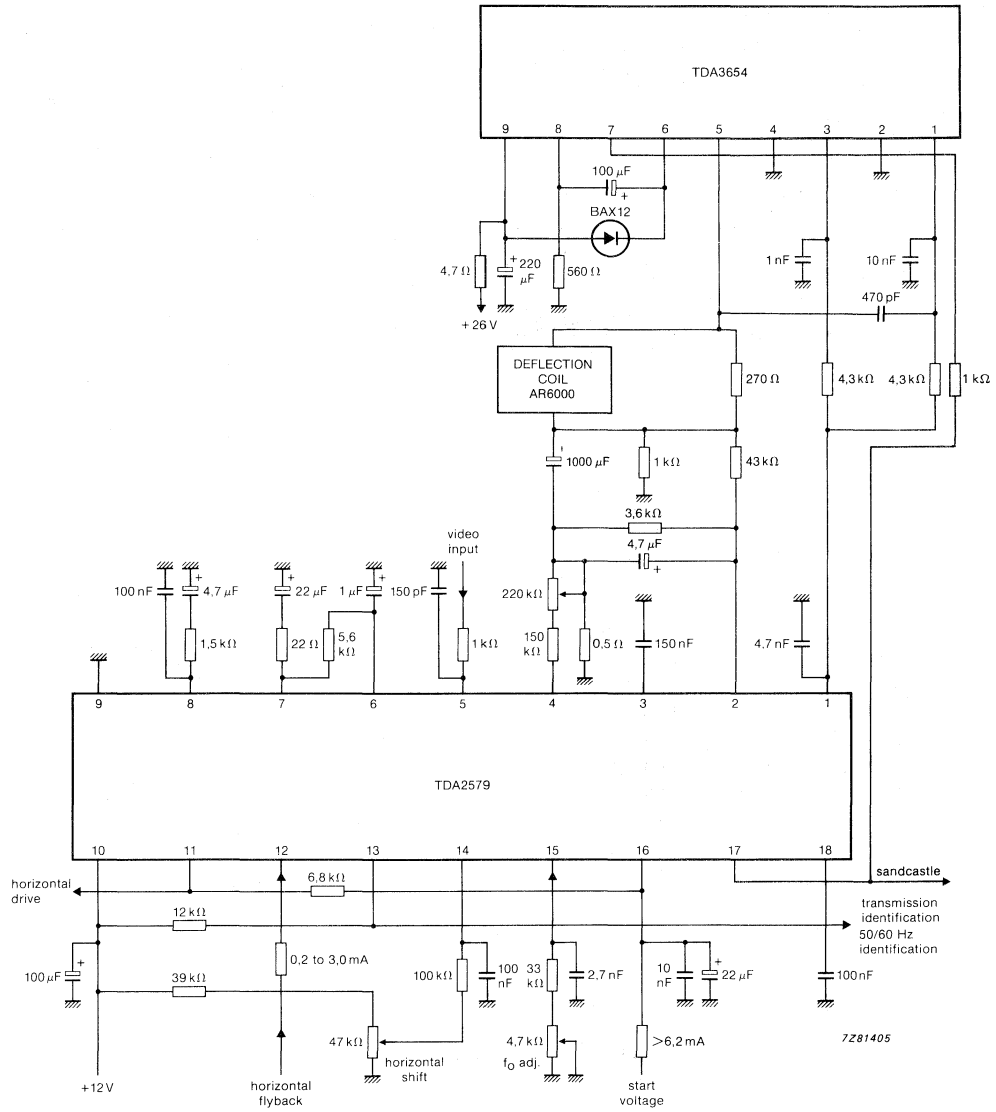


Fig. 6 Application diagram in combination with TDA2579.



## SECAM IDENTIFICATION CIRCUIT

### GENERAL DESCRIPTION

The TDA3724 is a monolithic integrated circuit for SECAM identification in PAL/SECAM (B,G) video tape recorders.

### QUICK REFERENCE DATA

Supply voltage (pin 10)	$V_P = V_{10-8}$	typ.	10 V
Supply current (pin 10)	$I_P = I_{10}$	typ.	16 mA
Identification inputs	$V_{3-8}$ (p-p)	min.	0,22 V
Identification inputs	$V_{4-8}$ (p-p)	min.	0,22 V
Identification output current	$I_1$	min.	3 mA

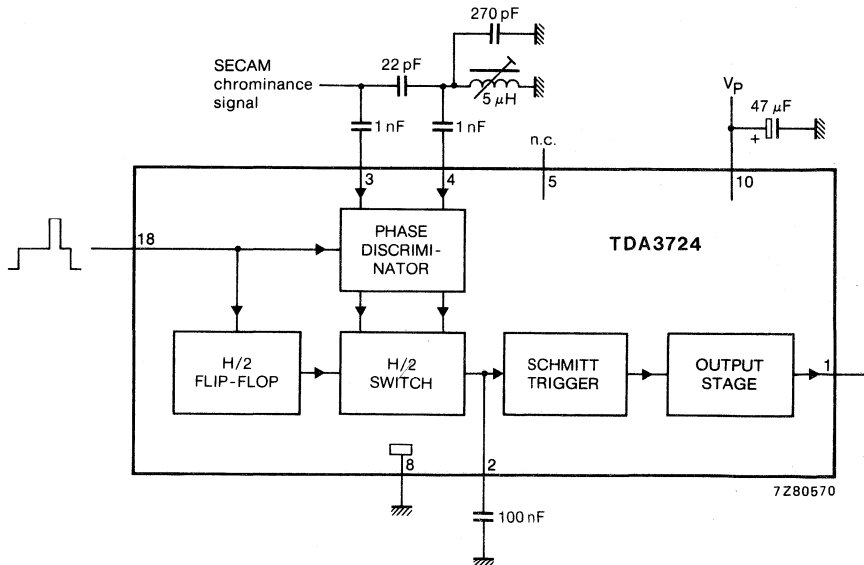


Fig. 1 Block diagram.

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102K).

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_P = V_{10-8}$	max.	13,2 V
Voltage range at pins 3,4,18	$V_{n-8}$		0 to $V_P$ V
Voltage range at pin 2	$V_{2-8}$		$\frac{1}{2}V_P$ to $V_P$ V
Current at pin 1	$-I_1$		5 mA
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to 70 °C

## CHARACTERISTICS

 $V_P = 10$  V;  $T_{amb} = 25$  °C; measured in Fig. 1; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
Supply at pin 10					
Supply voltage	$V_P = V_{10-8}$	9,6	10	13,2	V
Supply current at $V_P = 10$ V	$I_{10}$	—	16	21	mA
Supply current at $V_P = 13,2$ V	$I_{10}$	—	—	28	mA
Output voltage at pin 1 (open collector of pnp transistor) at SECAM mode	$V_{1-8}$	9,3	—	—	V
Output current pin 1 at SECAM mode	$-I_1$	3	—	—	mA
Output current pin 1 at NOT SECAM mode	$-I_1$	—	—	10	$\mu$ A
Charge capacitor for ident. integration	$C_{2-8}$	100	—	2000	nF
Identification inputs pin 3,4					
input voltage	$V_{3, 4-8}$ (p-p)	0,22	—	1,0	V
input resistance	$R_{3, 4-8}$	14	—	22	k $\Omega$
Sandcastle input pin 18					
input voltage for active discriminating stage	$V_{18-8}$	6,0	—	$V_P$	V

## SECAM (L) CHROMINANCE PROCESSOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3725 is a monolithic integrated circuit for chrominance processing in SECAM (L) video recorders.

### Features

- SECAM identification with output stage of SECAM/NOT SECAM identification
- Input to force recording or playback mode
- A.G.C. amplifier and soft limiting amplifier for SECAM chrominance inputs
- Divide by 4 of the chrominance frequencies for recording mode
- Rectifier and multiplier to generate 4 times SECAM chrominance frequencies at playback mode with external filtering
- Output for monitoring

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 10)	$V_P = V_{10-8}$	—	10	—	V
Supply current (pin 10)	$I_P = I_{13}$	—	38	—	mA
Chroma input signal (record)	$V_{11-8(p-p)}$	25	—	—	mV
Chroma input signal (playback)	$V_{9-8(p-p)}$	25	—	—	mV
Identification inputs	$V_{3-8(p-p)}$	0,22	—	1	V
Identification inputs	$V_{4-8(p-p)}$	0,22	—	1	V
Identification output current	$I_1$	3	—	—	mA
Monitor output	$V_{14-8(p-p)}$	—	0,6	—	V
Suppression of 2,2 MHz	$\alpha_{14}$	—	35	—	dB
Suppression of 8,8 MHz	$\alpha_{14}$	—	10	—	dB
Recording output (a.c.)	$V_{16-8(p-p)}$	—	3	—	V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102K).

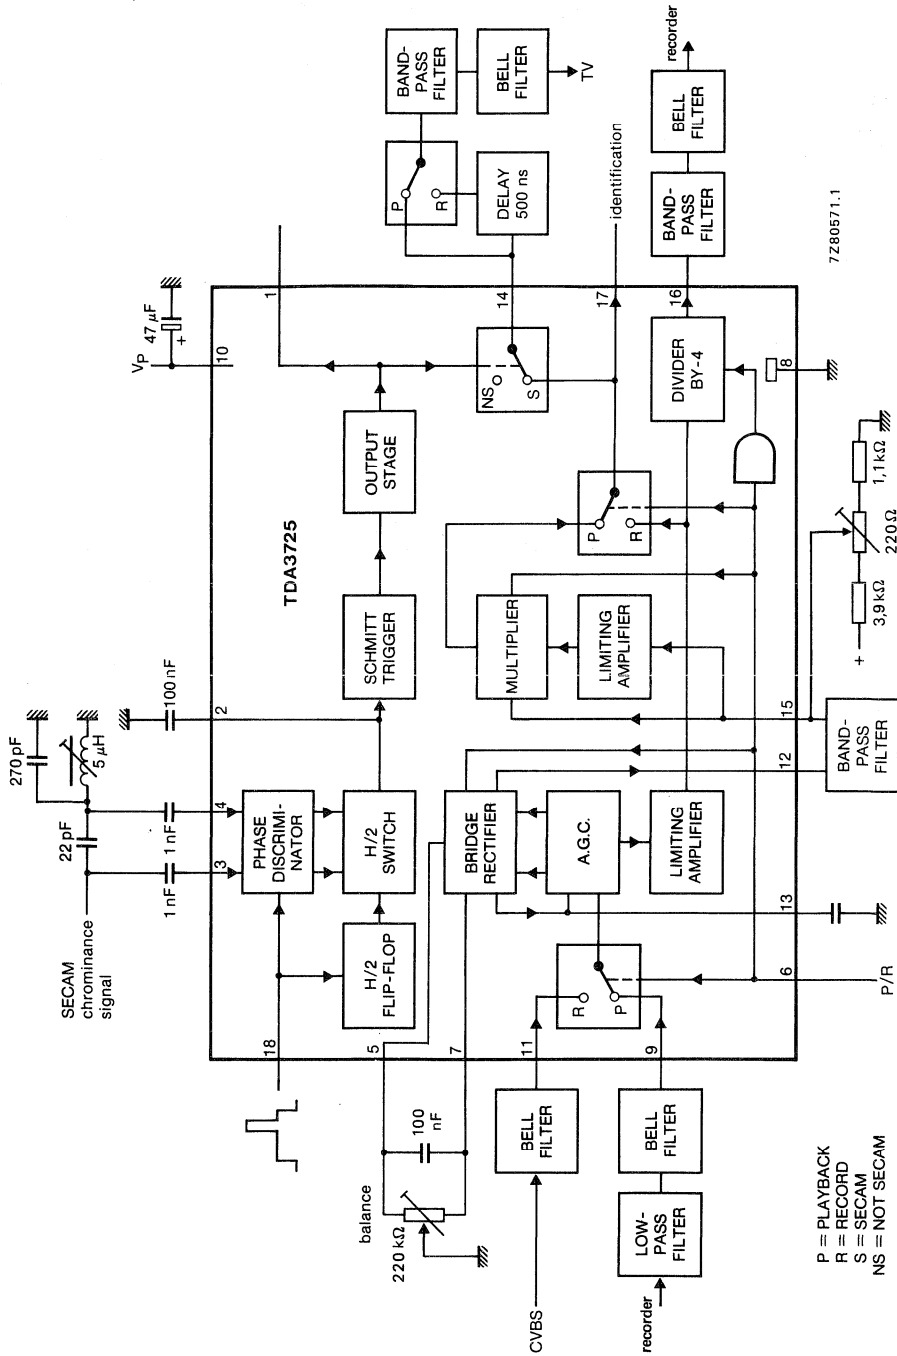


Fig. 1 Block diagram.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	typ.	max.	unit
Supply voltage pin 10	$V_P = V_{10-8}$	—	—	13,2	V
Voltage range at pins 3,4,5,6, 7,9,11,15,18 to pin 8 (ground)	$V_{n-8}$	0	—	$V_P$	V
Voltage range at pin 2 to pin 8	$V_{2-8}$	$\frac{1}{2}V_P$	—	$V_P$	V
Currents at pins 1,12,13,14,16,17	$-I_n$	—	—	5	mA
Storage temperature range	$T_{stg}$	-25	—	+ 150	°C
Operating ambient temperature range	$T_{amb}$	0	—	+ 70	°C

## CHARACTERISTICS

$V_P = 10\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; measured in Fig. 1, unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 10)</b>					
Supply voltage	$V_P = V_{10-8}$	9,6	10	13,2	V
Supply current at $V_P = 10\text{ V}$	$I_{10}$	—	38	50	mA
Supply current at $V_P = 13,2\text{ V}$	$I_{10}$	—	—	66	mA
<b>Input switch and a.g.c.</b>					
Input signal at record mode	$V_{11-8(p-p)}$	25	—	500	mV
Input signal at playback mode	$V_{9-8(p-p)}$	25	—	150	mV
Output signal (rectified) pin 12 (2,2 MHz)	$V_{12-8(p-p)}$	—	300	—	mV
d.c. level	$V_{12-8}$	5,0	5,5	—	V
Suppression of 1,1 MHz	$\alpha_{12}$	30	32	—	dB
Suppression of 3,3 MHz	$\alpha_{12}$	40	42	—	dB
Suppression of 4,4 MHz	$\alpha_{12}$	10	14	—	dB
Output resistance	$R_{12-8}$	—	$V_T/I_C$	—	$\Omega$
<b>Mixer and limiter</b>					
Input resistance pin 15	$R_{15-8}$	0,5	—	—	$M\Omega$
Output signal pin 14 (4,4 MHz)	$V_{14-8(p-p)}$	0,3	0,4	—	V
d.c. level	$V_{14-8}$	5,0	5,5	—	V
Suppression of 2,2 MHz and 6,6 MHz	$\alpha_{14}$	30	35	—	dB
Suppression of 8,8 MHz	$\alpha_{14}$	12	14	—	dB
Output resistance	$R_{14-8}$	—	$V_T/I_C$	—	$\Omega$
Output signal pin 17 (4,4 MHz)	$V_{17-8(p-p)}$	0,3	0,4	—	V
d.c. level	$V_{17-8(p-p)}$	6,0	6,5	—	V
Output resistance	$R_{17-8}$	—	$V_T/I_C$	—	$\Omega$
<b>Divider and limiter</b>					
Output signal pin 16	$V_{16-8(p-p)}$	2,5	3	—	V
d.c. level	$V_{16-8}$	3,5	4	—	V
Output resistance	$R_{16-8}$	—	$V_T/I_C$	—	$\Omega$
<b>Input for playback/record switching</b>					
Input voltage record	$V_{6-8}$	0	—	5	V
Input voltage playback	$V_{6-8}$	7	—	$V_P$	V
<b>Identification</b>					
Output voltage pin 1 (open collector of pnp transistor) in SECAM mode	$V_{1-8}$	9,3	—	—	V
Output current pin 1 in SECAM mode	$-I_1$	3	—	—	mA
Output current pin 1 in NOT SECAM mode	$-I_1$	—	—	1	$\mu\text{A}$
Charge capacitor for ident integration	$C_{2-8}$	100	—	1000	nF
Threshold colour forced on	$V_{2-8}$	8	—	$V_P$	V
Threshold killer forced on	$V_{2-8}$	5,8	—	6,2	V
Identification input voltage pin 3	$V_{3-8(p-p)}$	0,22	—	1	V
Identification input voltage pin 4	$V_{4-8(p-p)}$	0,22	—	1	V
Input resistance pins 3,4	$R_{3,4-8}$	14	18	22	$k\Omega$
Sandcastle input pin 18					
Input voltage for inactive discriminating stage	$V_{18-8}$	0	—	4,8	V
Input voltage for active discriminating stage	$V_{18-8}$	6	—	$V_P$	V

## FREQUENCY DEMODULATOR AND DROP OUT COMPENSATOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3730 is a monolithic integrated circuit for luminance processing in the playback path of video recorders. The device incorporates two signal channels, one for the main signal and one for the drop out signal.

### Features

- FM preamplifier
- Limiter in main and drop out channel
- Demodulator in main and drop out channel
- Drop out detector with Schmitt-trigger
- Electronic switches for FM and video signal controlled by drop out detector
- Linear and dynamic video de-emphasis
- D.C. reference stabilizer

### QUICK REFERENCE DATA


---

Supply voltage (pin 7 and pin 23)	$V_P = V_{7, 23-5, 25}$	typ.	10 V
Supply current (pin 7 + pin 23)	$I_P = I_7 + I_{23}$	typ.	40 mA
FM input signal (pin 17) (peak-to-peak value)	$V_{17-25(p-p)}$	typ.	100 mV
Video output signal (pin 26) (peak-to-peak value)	$V_{26-5(p-p)}$	typ.	2 V

---

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

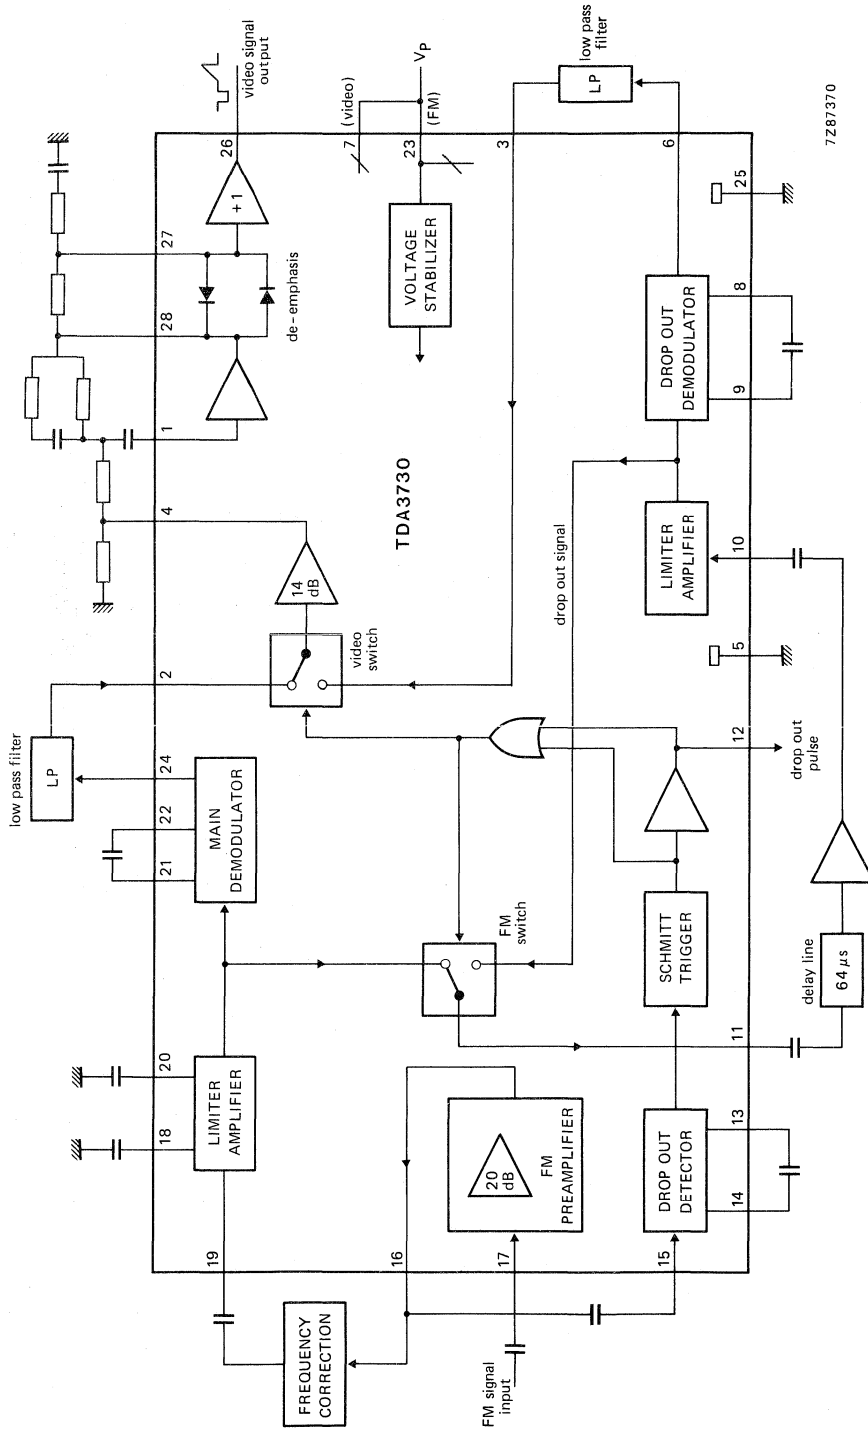

7287370

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pins 7 and 23)	$V_P = V_{7,23-5,25}$	max.	13,2 V
Voltage range at pins 1, 2, 3, 4, 5, 6, 10, 11, 12, 15, 16, 17, 18, 19, 20, 24, 26 to pin 5 and 25 (ground)	$V_{n-5,25}$		0 to $V_P$ V
Voltage at pins 8, 9, 13, 14, 21, 22 to pin 5 and 25 (ground)	$V_{n-5,25}$	max.	$V_P$ V
Voltage at pins 27, 28 to pin 5 and 25 (ground)	$V_{n-5,25}$	min.	0 V
Currents			
at pins 8, 9, 13, 14, 21, 22	$-I_n$	max.	3 mA
at pins 27 and 28	$I_n$	max.	3 mA
Total power dissipation	$P_{tot}$	max.	1,4 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

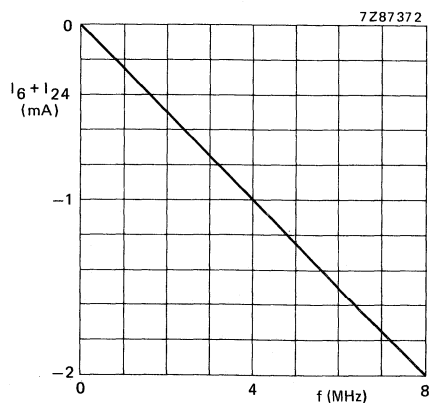


Fig. 2 Steepness of the main and drop out demodulator.

## CHARACTERISTICS

$V_P = V_{7, 23-5, 25} = 10 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in test circuit Fig. 3; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 7 and pin 23)</b>					
Supply voltage	$V_P = V_{7, 23-5, 25}$	9,6	10	13,2	V
Supply current	$I_{P1} = I_7$	—	23	—	mA
	$I_{P2} = I_{23}$	—	17	—	mA
<b>FM amplifier</b>					
Input voltage (pin 17) (peak-to-peak value)	$V_{17-25(p-p)}$	—	100	—	mV
Input resistance	$R_{17-25}$	10	—	—	k $\Omega$
Gain	$G_V$	—	20	—	dB
Bandwidth ( $R_G \leq 50 \Omega$ )	B	—	12	—	MHz
Output signal amplitude (pin 16) (peak-to-peak value)	$V_{16-25(p-p)}$	—	—	1,3	V
<b>Main limiter amplifier (pin 19)</b>					
FM input signal (peak-to-peak value)	$V_{19-25(p-p)}$	—	0,5	1	V
Input resistance	$R_{19-25}$	—	600	—	$\Omega$
Start of limiting (referred to pin 11) (peak-to-peak value)	$V_{19-25(p-p)}$	—	—	2,5	mV
<b>Drop out limiter amplifier (pin 10)</b>					
FM input signal (peak-to-peak value)	$V_{10-5(p-p)}$	—	—	0,8	V
Input resistance	$R_{10-5}$	—	1	—	k $\Omega$
Start of limiting (referred to pin 11) (peak-to-peak value)	$V_{10-5(p-p)}$	—	—	80	mV
<b>Main and drop out demodulators</b>					
Range of output voltages (pin 6 and pin 24) (peak-to-peak value)	$V_{6, 24-5, 25(p-p)}$	—	—	3,5	V
Linearity (bandwidth = 1 to 6 MHz)		-5	—	+5	%
Steepness (see Fig. 2)	S	—	0,25	—	mA/MHz
<b>FM switch (pin 11)</b>					
Output amplitude (peak-to-peak value)	$V_{11-5(p-p)}$	—	0,5	—	V
D.C. output voltage	$V_{11-5}$	—	8,4	—	V

parameter	symbol	min.	typ.	max.	unit
<b>Video switch (pin 4)</b>					
Input voltage (pin 2 and pin 3) (peak-to-peak value)	$V_{2,3-5(p-p)}$	—	—	0,5	V
Input resistance (open base)	$R_{2,3-5}$	20	—	—	k $\Omega$
Voltage gain	$G_v$	—	14	—	dB
D.C. output voltage at $V_{2,3-5} = 9,5$ V	$V_{4-5}$	—	5,4	—	V
<b>De-emphasis amplifier (linear)</b>					
Video output signal (pin 28) (peak-to-peak value)	$V_{28-5(p-p)}$	—	—	3	V
Gain-bandwidth product	G.B.	30	—	—	MHz
D.C. output voltage	$V_{28-5}$	—	4,8	—	V
<b>Dynamic de-emphasis</b>					
Output signal (pin 26) (peak-to-peak value) at $V_{28-5(p-p)} = 1$ V; $f = 1$ MHz sine	$V_{26-5(p-p)}$	—	632	—	mV
D.C. output voltage	$V_{26-5}$	—	3,4	—	V
Output current (emitter follower)	$-I_{26}$	—	—	5	mA
<b>Drop out detector and Schmitt-trigger</b>					
Input voltage for lower drop out threshold (pin 15) (peak-to-peak value)	$V_{15-5(p-p)}$	—	110	—	mV
Hysteresis of the Schmitt-trigger	V/V	—	1,5	—	dB
Input resistance	$R_{15-5}$	1,4	—	—	k $\Omega$
D.C. output voltage without drop out	$V_{12-5}$	—	—	2	V
D.C. output voltage with drop out	$V_{12-5}$	5	—	—	V
<b>OR-gate (internal)</b>					
Switching voltage threshold (pin 12) for signal flow from pin 2 to pin 4	$V_{12-5}$	—	—	1,5	V
for signal flow from pin 3 to pin 4	$V_{12-5}$	3	—	—	V

APPLICATION INFORMATION

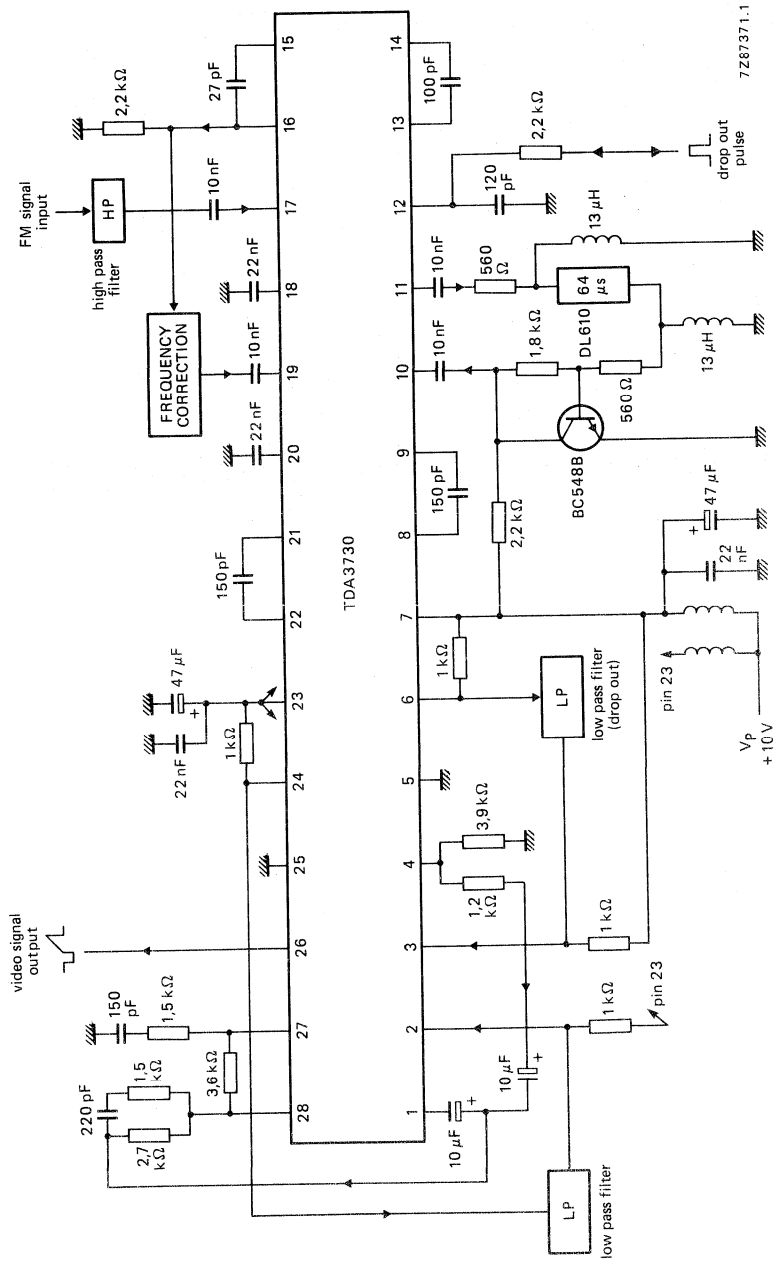


Fig. 3 Application diagram; also used as test circuit.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3740

## VIDEO PROCESSOR AND FREQUENCY MODULATOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3740 is a monolithic integrated circuit for video signal processing and frequency modulation in video recorders.

### Features

- Video controlled amplifier with clamping stage
- Fast and slow white amplitude detector
- Sync amplitude detector
- Black and white clip
- Insertion of sync and composite video signals
- Adder stage for composite video and chrominance signals
- Two-stage amplification for the composite video signal with dynamic (adjustable) and linear pre-emphasis
- White clip with external determination of clipping level
- Voltage controlled oscillator (frequency modulator)
- Blanking stage for the voltage controlled oscillator and limiter amplifier
- Reference voltage source

### QUICK REFERENCE DATA

Supply voltage (pin 18, 28)	$V_P = V_{18, 28-27}$	typ.	10 V
Supply current (pin 18, 28) (record mode)	$I_P = I_{18, 28}$	typ.	58 mA
Supply current (pin 18) (playback mode)	$I_P = I_{18}$	typ.	28 mA
Composite video input signal (peak-to-peak value)	$V_{3-27(p-p)}$	typ.	350 mV
Composite colour video output signal (peak-to-peak value)	$V_{7-27(p-p)}$	typ.	2 V
Chrominance input signal (peak-to-peak value)	$V_{9-27(p-p)}$	typ.	240 mV
Output current (pin 22, 23)	$I_{22, 23}$	typ.	8,5 mA

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

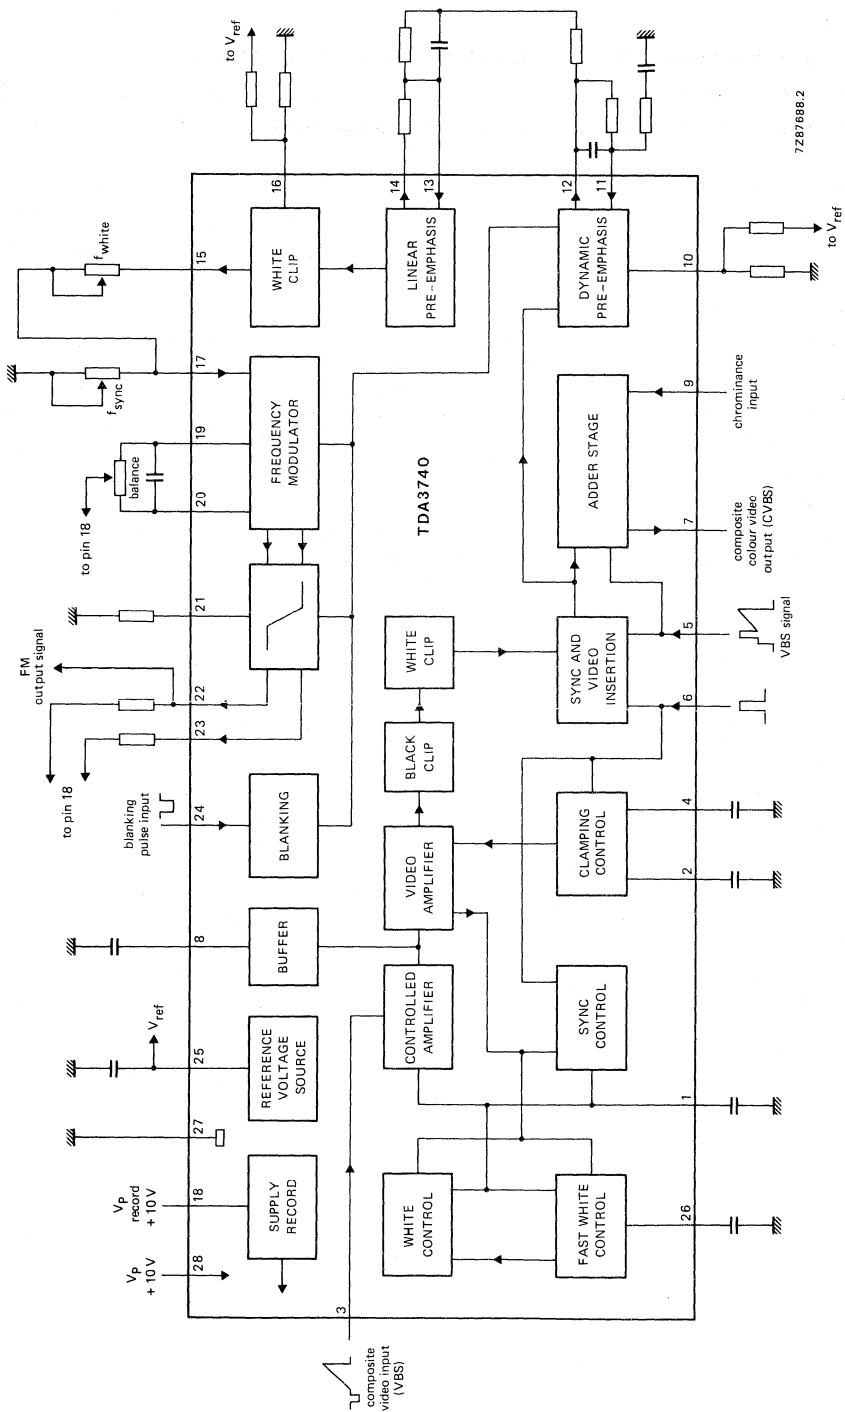


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 18, 28)  $V_P = V_{18, 28-27}$  max. 13,2 VWith pin 27 connected to ground and pin 18 and 28 to supply voltage ( $V_P$ ) all voltages between 0 and  $V_P$  are allowed.Total power dissipation  $P_{tot}$  max. 1,4 WStorage temperature range  $T_{stg}$  -25 to +150 °COperating ambient temperature range  $T_{amb}$  0 to +70 °C**CHARACTERISTICS** $V_P = V_{18-28} = 10$  V;  $T_{amb} = 25$  °C; measured in test circuit Fig. 2; unless otherwise specified

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 18, 28)</b>					
Supply voltage	$V_P = V_{18, 28-27}$	9	10	13,2	V
Supply current					
at record (FM kill inactive)	$I_P = I_{18, 28}$	—	58	—	mA
at playback	$I_P = I_{28}$	—	28	—	mA
<b>Controlled amplifier</b>					
Composite video input signal (peak-to-peak value)	$V_{3-27(p-p)}$	0,20	0,35	0,62	V
Video signal control range (referred to 0,35 V input signal at pin 3)	$\alpha_{3-27}$	±5	±6	—	dB
Input resistance	$R_{3-27}$	7	10	13	kΩ
Input capacitance	$C_{3-27}$	—	—	10	pF
Composite colour video output signal (peak-to-peak value)	$V_{7-27(p-p)}$	1,9	2	2,1	V
Frequency response (0 to 3 MHz)	$\alpha_{7-3}$	-0,5	—	0,5	dB
<b>Sync recovering and insertion of composite video signal</b>					
Threshold voltage for sync recovering	$V_{6-27}$	3,0	3,5	4,0	V
Input resistance	$R_{6-27}$	100	—	—	kΩ

parameter	symbol	min.	typ.	max.	unit
Insertion of composite video signal					
insertion inactive	V <sub>5-27</sub>	0	—	0,9	V
video + chroma mute	V <sub>5-27</sub>	2,5	—	3,0	V
insertion black level	V <sub>5-27</sub>	3,1	3,25	3,4	V
insertion white level (90% CVBS)	V <sub>5-27</sub>	3,7	4,0	4,3	V
Input resistance	V <sub>5-27</sub>	100	—	—	k $\Omega$
Gain	G <sub>7-5</sub>	2,9	4,5	6,5	dB
Frequency response (0 to 5 MHz)	$\alpha$ <sub>7-5</sub>	—	—	3	dB
Signal suppression pin 7 at mute		-40	—	—	dB
<b>Clamping control</b>					
Duration of clamping pulse (note 1) with C <sub>2-27</sub> = 100 nF; C <sub>4-27</sub> = 2,2 nF	t <sub>d</sub>	1	3	4,5	$\mu$ s
Max. leakage current of external capacitor	I <sub>L2</sub>	—	—	1	$\mu$ A
<b>Black and white clip</b>					
Black clip relative to black level	$\Delta$ V <sub>7-27</sub>	-40	-25	0	mV
White clip at pin 7 (referred to nominal VBS)		103	105	107	%
<b>Chrominance signal adder and output stage</b>					
Burst input signal (peak-to-peak value)	V <sub>9-27(p-p)</sub>	—	240	400	mV
Input resistance	R <sub>9-27</sub>	4	5,6	—	k $\Omega$
D.C. level of top sync	V <sub>7-27</sub>	2,4	2,7	3,0	V
Sync amplitude at CVBS output pin 7	V <sub>7-27(p-p)</sub>	570	600	630	mV
Gain (f = 4,43 MHz)	G <sub>7-9</sub>	7	8	9	dB
Output resistance	R <sub>7-27</sub>	—	—	30	$\Omega$
Frequency response (0 to 5 MHz)	$\alpha$ <sub>7-9</sub>	-0,5	—	+0,5	dB
<b>Dynamic and linear pre-emphasis; white limiter</b>					
Input resistance pin 11	R <sub>11-27</sub>	15	—	—	k $\Omega$
Output resistance (emitter follower with internal current source)	R <sub>12-27</sub>	—	—	30	$\Omega$
Gain-bandwidth product dynamic (V <sub>24-27</sub> = V <sub>p</sub> )		24	36	—	MHz
linear		30	—	—	MHz

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
Range of dynamic pre-emphasis (fixed by external resistors at pin 10)	V <sub>10-27</sub>	0	—	2,5	V
Gain adjustment range at 1 MHz and V <sub>7-27</sub> = 632 mV	G <sub>12-7</sub>	1,5	—	8	dB
Output resistance (emitter follower with internal current source)	R <sub>14-27</sub>	—	—	30	Ω
White clip level deviation relative to V <sub>16-27</sub> = 1,5 V	V <sub>16-15</sub>	75	—	125	mV
Range of clipping determination (note 2)	V <sub>16-27</sub>	1	—	3	V
<b>Frequency modulator</b>					
D.C. level at pin 21 (note 3)	V <sub>21-27</sub>	1,8	1,9	2,0	V
FM output voltage (note 3) R <sub>21-27</sub> = 1,5 kΩ, R <sub>22, 23-18</sub> = 470 Ω	V <sub>22, 23-27</sub>	—	660	—	mV
Slope between 3 MHz and 6 MHz	$\frac{\Delta f_{22,23}}{\Delta I_{17}}$	—	10,5	—	$\frac{\text{KHz}}{\mu\text{A}}$
Linearity between 3 MHz and 6 MHz	m	95	—	—	%
Suppression of the 2nd harmonic referred to the 1st harmonic 3,8 MHz (balanced)	α <sub>harm</sub>	40	46	—	dB
Frequency drift dependent on: drift of supply voltage (V <sub>p</sub> = 9 – 13,2 V)	$\frac{\Delta f_{22,23}}{\Delta V_p}$	—	5	10	$\frac{\text{KHz}}{\text{V}}$
drift of ambient temperature (T <sub>amb</sub> = 0 – 70 °C) at 3,8 MHz	Δf <sub>22,23</sub>	–85	—	+85	kHz
at 4,8 MHz	Δf <sub>22,23</sub>	–85	—	+85	kHz
Drift of frequency span dependent on temperature drift (T <sub>amb</sub> = 0 – 70 °C)	Δf	–70	—	+70	kHz
Input voltage to switch FM off	V <sub>24-27</sub>	—	—	2	V
Input voltage to switch FM on	V <sub>24-27</sub>	3	—	—	V
Input resistance	R <sub>24-27</sub>	10	—	—	kΩ


parameter	symbol	min.	typ.	max.	unit
<b>Reference voltage source (pin 25)</b>					
Output voltage	$V_{25-27}$	—	5,5	—	V
Output current (additional to application)	$I_{25}$	—3	—	+5	mA
Output voltage drift dependent on drift of supply voltage ( $V_P = 9 - 13,2$ V)	$\frac{\Delta V_{25-27}}{\Delta V_P}$	—10	—	+10	$\frac{mV}{V}$
drift of ambient temperature ( $T_{amb} = 0 - 70$ °C)	$\Delta V_{25-27}$	—90	—	+90	mV

**Notes**

1. Duration of clamping pulse is determined by  $C_{4-27}$  as follows:  $t_d (\mu s) = 1,364 \cdot C_{4-27} (nF)$ .
2. White clipping level is fixed by the external resistors at pin 16, e.g.  $R_{16-25} = 3,3$  k $\Omega$  and  $R_{16-27} = 2$  k $\Omega$  results in 160% clipping level.
3. FM output amplitude at pins 22 and 23 is determined by the external fixed resistors  $R_{21-27}$ ,  $R_{22-18}$  and  $R_{23-18}$ .

DEVELOPMENT DATA

APPLICATION INFORMATION

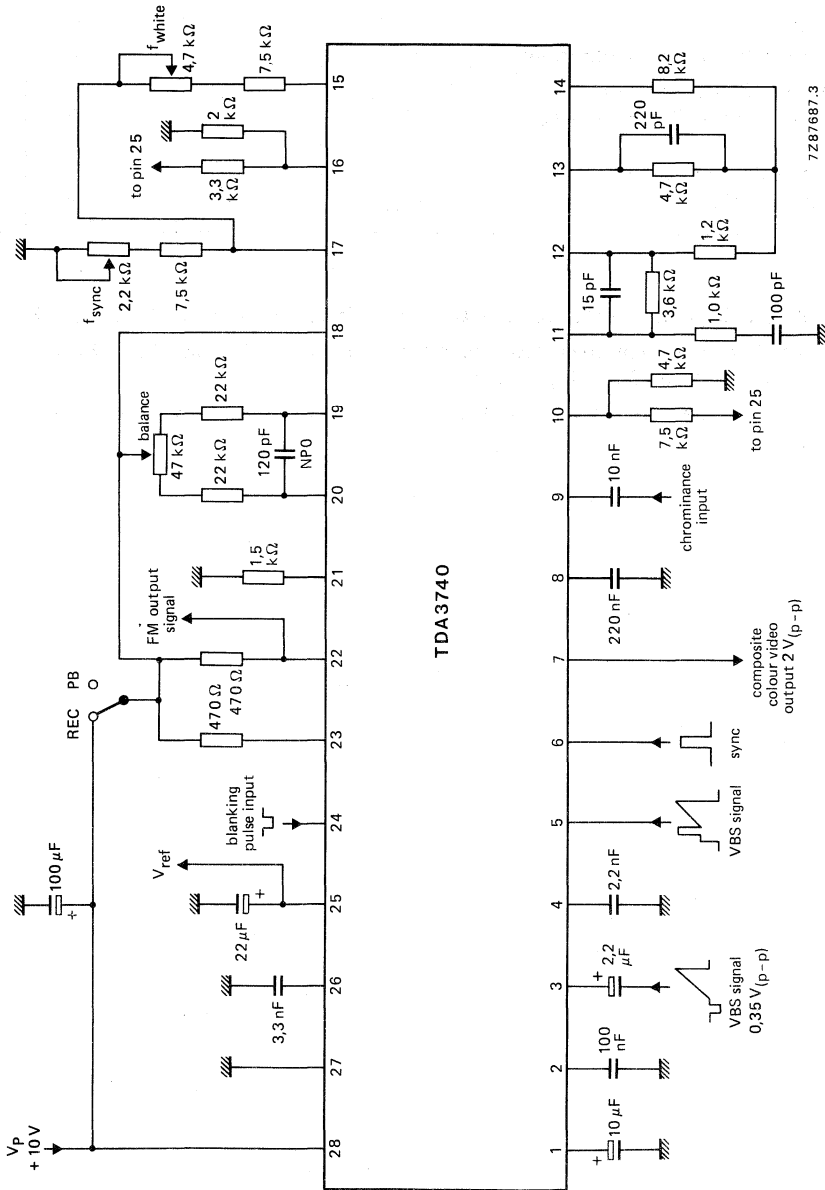

REC = record.  
PB = play/back.

Fig. 2 Application diagram; also used as test circuit.





## PAL/NTSC/SECAM SYNCHRONIZATION PROCESSOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3755 is a monolithic integrated circuit for PAL/NTSC SECAM synchronization processing in VHS video recorders.

### Features

- Adaptive sync separator
- Internal vertical sync pulse integrator
- Composite sync and vertical pulse output
- Current controlled oscillator (CCO) with 320/321 times horizontal frequency
- Horizontal phase detector with current output
- Video identification and mute circuit
- Burst gating pulse output (externally adjustable phase relationship)
- Test-picture output
- Subcarrier frequency output switched in phase in accordance with VHS standard
- Fast phase correction of subcarrier frequency
- Selection input to force PAL or NTSC function
- Still picture input

### QUICK REFERENCE DATA

Supply voltage (pin 13)	$V_P = V_{13-15}$	typ.	10 V
Supply current (pin 13)	$I_P = I_{13}$	typ.	24 mA
<b>Sync separator</b>			
Sync pulse input voltage (peak-to-peak value)	$V_{3-15(p-p)}$	typ.	300 mV
Sync pulse output voltage (peak-to-peak value)	$V_{1-15(p-p)}$	min.	7,3 V
<b>Vertical sync pulse</b>			
Output voltage (peak-to-peak value)	$V_{18-15(p-p)}$	min.	2,7 V
<b>Phase detector</b>			
Catching range	$\Delta f$	min.	$\pm 3,0 \%$
<b>Oscillator</b>			
Oscillator frequency			
PAL	$f_{osc}$	typ.	5,02 MHz
NTSC	$f_{osc}$	typ.	5,04 MHz
Output frequency			
PAL	$f_o$	typ.	627 kHz
NTSC	$f_o$	typ.	629 kHz
Output sinewave (peak-to-peak value)	$V_{8-15(p-p)}$	typ.	3 V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

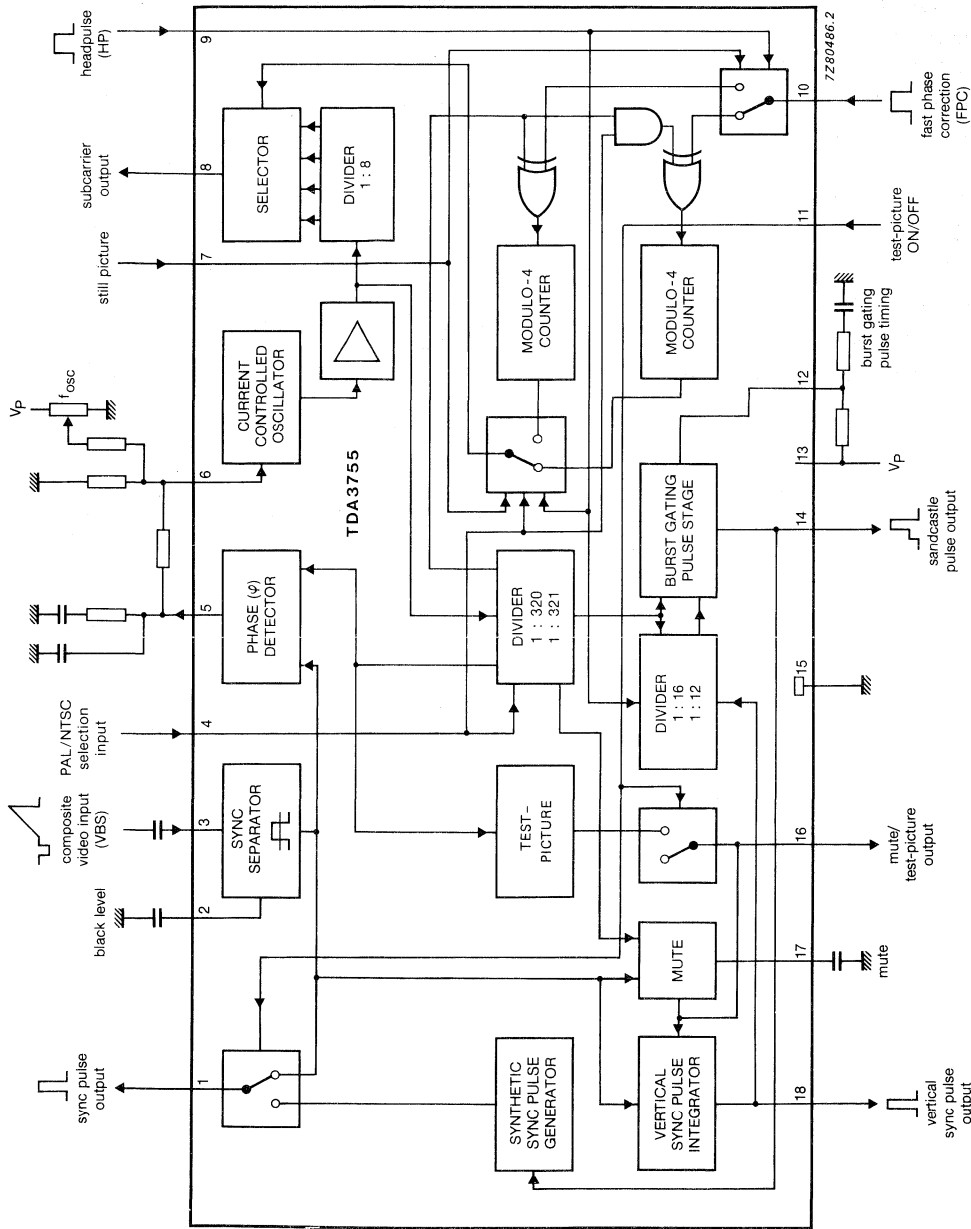


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 13)	$V_P = V_{13-15}$	max.	13,2 V
Voltage range at pins 2, 3, 4, 7, 9, 10, 11, 17 to pin 15 (ground)	$V_{n-15}$		0 to $V_P$ V
Voltage range at pin 12	$V_{12-15}$	min.	0 V
Voltage range at pin 6	$V_{6-15}$	max.	8 V
Currents			
at pins 1, 5, 8, 14, 16, 18	$\pm I_n$	max.	5 mA
at pin 6	$-I_6$	max.	1 mA
at pin 12	$I_{12}$	max.	2 mA
Total power dissipation	$P_{tot}$	max.	1 W
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		0 to + 70 °C

## CHARACTERISTICS

$V_P = 10\text{ V}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ ; measured in Fig. 4; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 13)</b>					
Supply voltage range	$V_P = V_{13-15}$	9,6	—	13,2	V
Supply current	$I_P = I_{13}$	—	24	—	mA
<b>Sync separator (pin 3)</b>					
Colour composite video input voltage (note 1) (peak-to-peak value)	$V_{3-15(p-p)}$	—	1	—	V
Sync pulse amplitude (peak-to-peak value)	$V_{3-15(p-p)}$	75	—	600	mV
Slicing level, relative to sync pulse amplitude (note 2)		—	50	—	%
Internal resistance of video source	$R_G$	—	—	1	k $\Omega$
Sync output voltage HIGH at $-I_1 = 1\text{ mA}$	$V_{1-15}$	7,8	—	—	V
Sync output voltage LOW at $I_1 = 1\text{ mA}$	$V_{1-15}$	—	—	0,5	V
Delay between signal at input pin 3 and sync pulse at output pin 1	$t_d$	—	0,2	—	$\mu\text{s}$
<b>Vertical sync pulse (pin 18; note 3)</b>					
Output voltage HIGH at $-I_{18} = 1\text{ mA}$	$V_{18-15}$	2,7	—	5,0	V
Output voltage LOW at $I_{18} = 1,6\text{ mA}$	$V_{18-15}$	—	—	0,5	V
Duration of HIGH state of internally generated output pulse	$t_p$	—	190	—	$\mu\text{s}$
Delay between leading edge of input signal at pin 3 and leading edge of output pulse at pin 18	$t_d$	32	—	64	$\mu\text{s}$
<b>Selection input (pin 4)</b>					
Input voltage for NTSC state	$V_{4-15}$	—	—	0,3	V
Input current at $V_{4-15} = 0\text{ V}$	$-I_4$	—	—	20	$\mu\text{A}$
Input voltage for PAL state pin 4 open circuit or	$V_{4-15}$	2	—	—	V

parameter	symbol	min.	typ.	max.	unit
<b>Test picture/mute/synthetic sync pulse</b>					
Minimum voltage at pin 11 for test picture mode active (note 4)	V <sub>11-15</sub>	4,8	—	—	V
Maximum voltage at pin 11 for test picture mode inactive	V <sub>11-15</sub>	—	—	3,8	V
Output voltage at pin 16					
at test picture "black" or at mute	V <sub>16-15</sub>	—	2,75	—	V
at test picture "white"	V <sub>16-15</sub>	—	4,50	—	V
at "in sync condition"	V <sub>16-15</sub>	—	—	0,5	V
Input current (pin 11)	-I <sub>11</sub>	—	—	25	μA
<b>Oscillator/phase detector</b>					
Oscillator frequency (note 5)					
PAL	f <sub>osc</sub>	—	5,02	—	MHz
NTSC	f <sub>osc</sub>	—	5,04	—	MHz
Oscillator conversion gain	k <sub>o</sub>	—	16,13	—	MHz/mA
D.C. control voltage	V <sub>6-15</sub>	—	2,1	—	V
Input current for f = 5,016 MHz	-I <sub>16</sub>	—	310	—	μA
Holding range (note 6)	Δf	± 3,2	—	—	%
Catching range (note 6)	Δf	± 3,0	—	—	%
Control loop gain	k <sub>v</sub>	—	380 x 10 <sup>3</sup>	—	s <sup>-1</sup>
Output of lower subcarrier (note 7) (peak-to-peak value)					
	V <sub>8-15(p-p)</sub>	—	3	—	V
Output current	I <sub>g</sub>	—	—	2	mA
D.C. output voltage	V <sub>8-15</sub>	—	3,1	—	V
2nd harmonic suppression without switching	α <sub>2nd</sub>	20	—	—	dB
Switching position prior to centre of sync pulse (pin 3)	t <sub>s</sub>	—	2	—	μs
Output peak current of phase detector during sync pulse	± I <sub>5</sub>	—	3,78	—	mA
Output voltage range (note 8)	V <sub>5-15</sub>	1,4	—	2,8	V

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse (pin 14; note 9)</b>					
Output voltage HIGH (note 10) at $-I_{14} = 1 \text{ mA}$	$V_{14-15}$	7,8	—	—	V
Output voltage INTERMEDIATE at $-I_{14} = 1 \text{ mA}$	$V_{14-15}$	2,3	3,0	3,7	V
Output voltage LOW at $I_{14} = 1 \text{ mA}$	$V_{14-15}$	—	—	0,5	V
Lower part is starting prior to the centre of sync pulse at pin 3 and ending with the upper part	$t_{14-3}$	—	2,6	—	$\mu\text{s}$
<b>Fast phase correction/head pulse</b>					
Threshold voltage for fast phase correction (note 11)	$V_{10-15}$	—	7,2	—	V
Input current	$-I_{10}$	—	—	20	$\mu\text{A}$
Threshold voltage of head pulse input	$V_{9-15}$	—	1,4	—	V
Input current	$-I_9$	—	—	20	$\mu\text{A}$
D.C. input voltage	$V_{7-15}$	—	5,6	—	V
Input resistance	$R_{7-15}$	3	—	—	$\text{k}\Omega$
<b>Subcarrier phase switching (note 12)</b>					
Phase switching of subcarrier phase in accordance with head pulse if	$V_{7-15}$	—	5,6*	—	V
LOW state of still picture input	$V_{7-15}$	—	—	0,5	V
Continuous phase switching regardless of head pulse if	$V_{7-15}$	—	$V_P$	—	V

\* Or not connected.

## Notes to characteristics

1. The sync separator input signal is shown in Fig. 2.


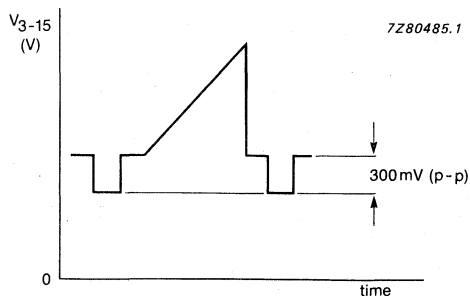


Fig. 2 Colour composite video input signal at pin 3.

2. The black level and the top sync level are detected internally and stored in capacitors at pin 2 and pin 3 respectively.
3. The vertical sync pulse output is disabled by mute.
4. In test picture mode the synthetic sync pulse is fed to output pin 1 and the vertical pulse consists of an uninterrupted block pulse of  $192 \mu\text{s}$  triggering at every transition of head pulse (HP) at pin 9. The timing of test picture and synthetic sync pulse is shown in Fig. 3.

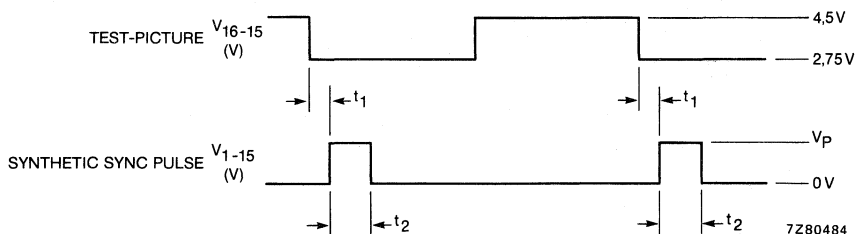

Where: The value of  $t_1$  is dependent upon adjustment of the burst gating pulse delay.  
Time  $t_2$  is the burst gating pulse duration.

Fig. 3 Timing of test picture and synthetic sync pulse.

5. Oscillator adjustment during test picture mode made only, at  $V_{11-15} > 4,8 \text{ V}$ ,  $V_{7-15} = 0 \text{ V}$  and  $V_{4-15} > 2 \text{ V}$  or open circuit; measurement is  $f_{\text{osc}}/8$  at output pin 8.
6. The holding range and catching range are both determined by the resistor connected between pin 5 and pin 6.
7. The phase of the lower subcarrier is switched in accordance with the VHS standard. PNP emitter follower, internal resistive load of  $10 \text{ k}\Omega$  (typ.) to  $V_p$ .
8. The output voltage at pin 5 is disabled during test picture mode.

## Notes to characteristics (continued)


9. The burst gating pulse is superimposed on an uninterrupted horizontal pulse. It is suppressed 16 times starting with every transition of the head pulse at pin 9. If a vertical pulse is detected during that time the burst gating pulses are additionally suppressed until line 12 and line 324 respectively. In any event the number of suppressed burst gating pulses is even.
10. The timing of the upper part of the sandcastle pulse is determined by the components connected to pin 12 (Fig. 4) and is independent of supply voltage variations.
11. The fast phase correction pulses have to be in the burst gating reference pulse. For any HIGH to LOW transitions of the correction pulse the phase is corrected by  $-90^\circ$  if the head pulse input is LOW and by  $+90^\circ$  if the head pulse input is HIGH.
12. Subcarrier phase switching is detailed in Table 1.  
Subcarrier is  $40,000 \times f_H$  for NTSC state and  $40,125 \times f_H$  for PAL state.

Table 1 Subcarrier phase switching

still picture input	PAL		NTSC	
	HP = HIGH	HP = LOW	HP = HIGH	HP = LOW
HIGH	$-90^\circ$	$-90^\circ$	$-90^\circ$	$-90^\circ$
not connected	$0^\circ$	$-90^\circ$	$+90^\circ$	$-90^\circ$
LOW	$0^\circ$	$0^\circ$	$+90^\circ$	$+90^\circ$



APPLICATION INFORMATION

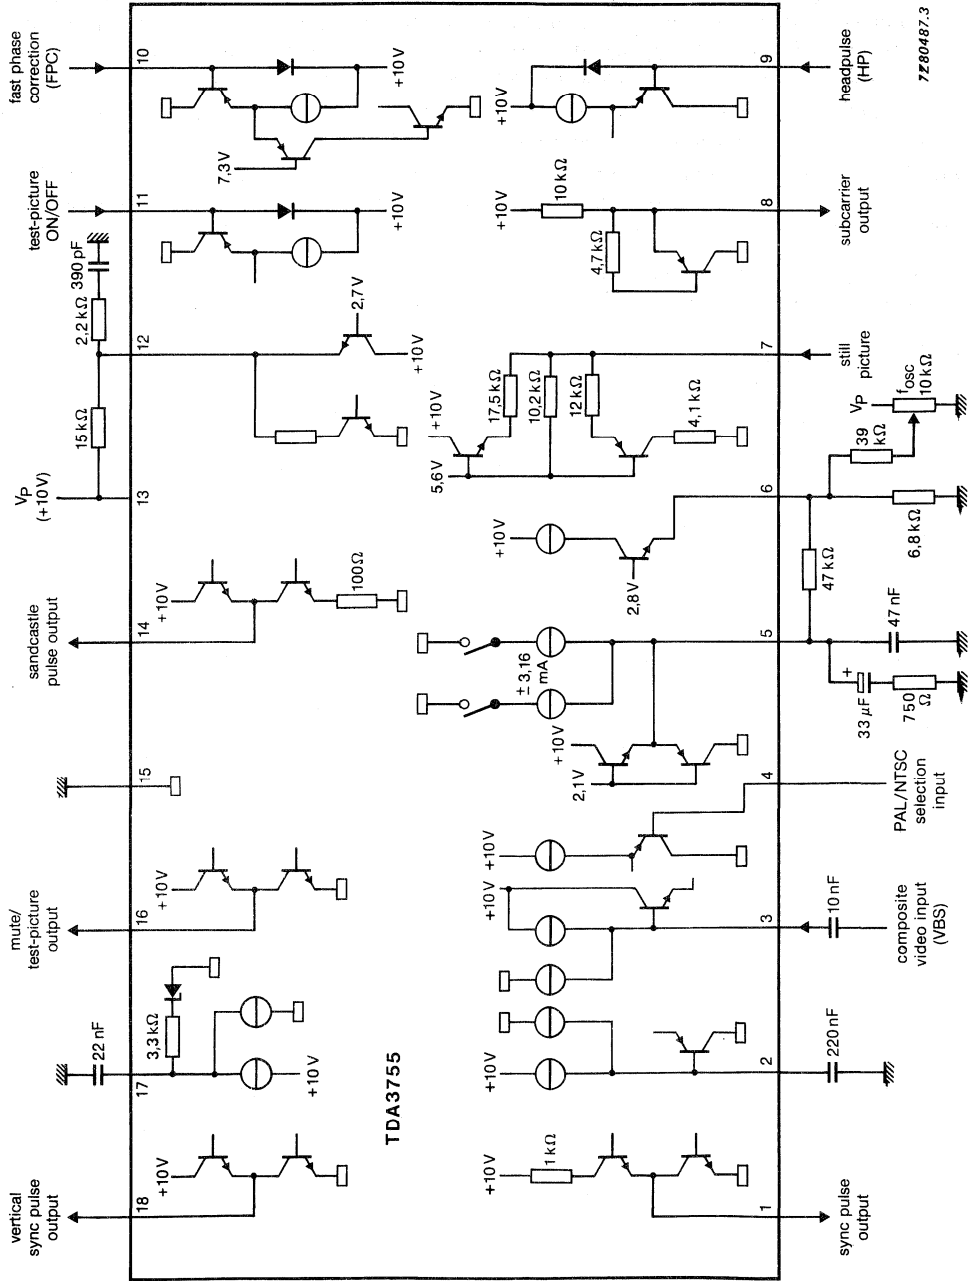

7Z80487.3

Fig. 4 Application circuit diagram.



## PAL CHROMINANCE SIGNAL PROCESSOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3760 is a monolithic integrated circuit for chrominance signal processing in video recorders.

### Features

- Automatic gain controlled pre-amplifier with record/playback selection
- Signal mixer with balancing stage
- Output stage for the 627 kHz chrominance signal, with facility for being disabled by colour killer and record/playback mode switch
- Amplitude detector with automatic gain control for the preamplifier
- 4,43 MHz voltage controlled oscillator (VCO) for recording and playback
- 4,43 MHz fixed oscillator for playback
- Phase detector controlled synchronization of the VCO
- Subcarrier mixer
- H/2 demodulator for the production of PAL identification and colour killing signals
- Flip-flop for PAL identification
- Sandcastle pulse processing
- Colour killing stage with hysteresis
- Internal record/playback selection
- Second phase detector for fast phase correction of sub-carrier

### QUICK REFERENCE DATA

Supply voltage (pin 9)	$V_P = V_{9-15}$	typ.	10 V
Supply current (pin 9)	$I_P = I_9$	typ.	45 mA

### Inputs

Chrominance signal			
4,43 MHz for record (peak-to-peak value)	$V_{2-15(p-p)}$	typ.	200 mV
627 kHz for playback (peak-to-peak value)	$V_{1-15(p-p)}$	typ.	200 mV

### Outputs

Chrominance signal			
4,43 MHz (peak-to-peak value)	$V_{24-15(p-p)}$	typ.	490 mV
627 kHz (peak-to-peak value)	$V_{26-15(p-p)}$	typ.	2 V

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

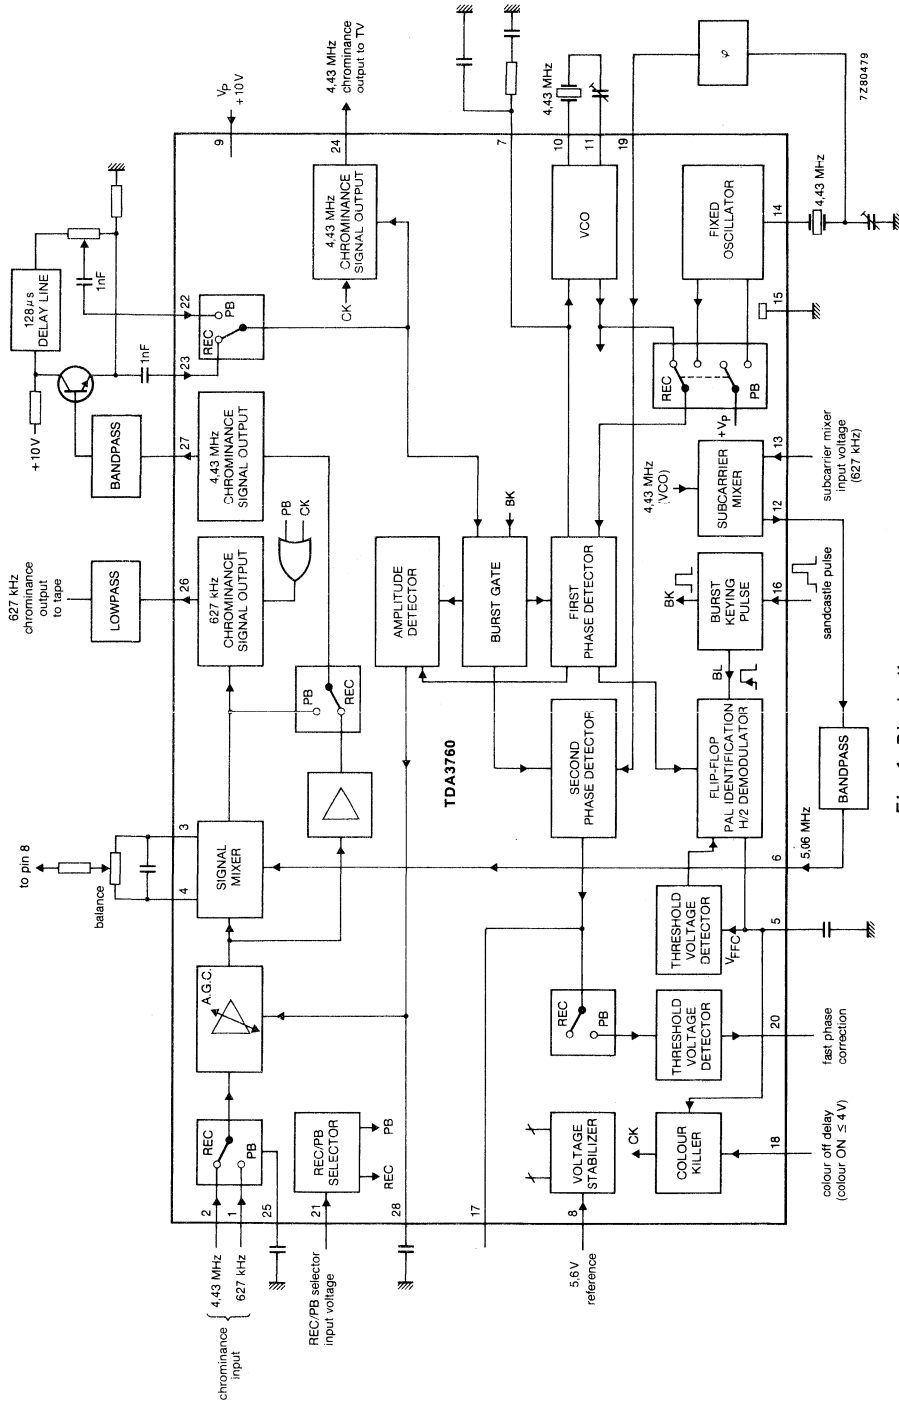


Fig. 1 Block diagram.

- BK = burst key pulse
- BL = blanking pulse
- FPC = flip-flop correction
- FPC = fast phase correction
- REC = record
- PB = playback
- CK = colour killer

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 9)	$V_P = V_{9-15}$	max.	13,2 V
Voltage range at pins 1, 2, 5, 7, 8, 9, 16, 17, 18, 19, 20, 21, 22, 23 to pin 15 (ground)	$V_{n-15}$		0 to $V_P$ V
Voltage ranges			
at pins 3, 4, 28*	$V_{3, 4, 28-15}$		3 to 6 V
at pin 6, 25*	$V_{6, 25-15}$		0 to 5 V
at pin 10*	$V_{10-15}$		1,5 to 4 V
at pin 13*	$V_{13-15}$		0 to 3 V
at pin 14*	$V_{14-15}$		0 to 8 V
Voltages			
at pin 12	$V_{12-15}$	max.	$V_P$ V
at pin 24	$V_{24-15}$	max.	7 V
Currents			
at pins 11, 18	$-I_{11, 18}$	max.	2 mA
at pins 12, 26, 27	$-I_{12, 26, 27}$	max.	5 mA
at pin 24	$-I_{24}$	max.	3 mA
Total power dissipation	$P_{tot}$	max.	1,4 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

\* Measured with  $V_{8-15} = 5,6$  V

## CHARACTERISTICS

$V_P = V_{9-15} = 10 \text{ V}$ ;  $V_{8-15} = 5,6 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; burst key duration  $4 \text{ } \mu\text{s}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 9)</b>					
Supply voltage	$V_P = V_{9-15}$	9,6	—	13,2	V
Supply current for playback and burst keying at $-I_{12, 18, 24, 26, 27} = 0$	$I_P = I_g$	—	45	—	mA
at $-I_{12, 18, 24, 26, 27} = 0$ ; $V_P = 12 \text{ V}$	$I_P = I_g$	—	46	—	mA
<b>A.G.C. preamplifier (pins 1 and 2)</b>					
Input voltage* (f = 4,43 MHz) during record (peak-to-peak value)	$V_{2-15(p-p)}$	20	—	400	mV
Input voltage* (f = 627 kHz) during playback (peak-to-peak value)	$V_{1-15(p-p)}$	30	—	400	mV
Input resistance	$R_{1, 2-15}$	7	—	—	k $\Omega$
Input capacitance	$C_{1, 2-15}$	—	—	5	pF
<b>627 kHz chrominance signal (pin 26)* (transposed on to 627 kHz signal)</b>					
Output voltage (peak-to-peak value)	$V_{26-15(p-p)}$	—	2	—	V
Signal suppression at output for f = 1,25 MHz	$\alpha_{26}$	—	35	—	dB
for f = 5,06 MHz (externally balanced via pins 3 and 4)	$\alpha_{26}$	—	40	—	dB
during colour killing (pin 25)	$\alpha_{26}$	40	—	—	dB
D.C. output voltage	$V_{26-15}$	—	6,7	—	V
<b>4,43 MHz chrominance signal (pin 27)*</b>					
Output voltage during record (peak-to-peak value)	$V_{27-15(p-p)}$	—	1,15	—	V
during playback after signal mixing (peak-to-peak value)	$V_{27-15(p-p)}$	—	—	3,1	V
Signal suppression at output for f = 5,06 MHz (externally balanced)	$\alpha_{27}$	—	40	—	dB
for f = 8,86 MHz	$\alpha_{27}$	—	30	—	dB
for f = 3,81 MHz	$\alpha_{27}$	—	38	—	dB
for f = 3,18 MHz	$\alpha_{27}$	—	30	—	dB
D.C. output voltage	$V_{27-15}$	—	7	—	V

\* The chrominance signal values hold for a 75% saturated colour bar signal.

parameter	signal	min.	typ.	max.	unit
<b>4,43 MHz chrominance signal amplifier*</b>					
Burst input signal					
at pin 22 (peak-to-peak value)	V <sub>22-15(p-p)</sub>	—	225	—	mV
at pin 23 (peak-to-peak value)	V <sub>23-15(p-p)</sub>	—	225	—	mV
Input resistance					
at pin 22	R <sub>22-15</sub>	6	—	—	kΩ
at pin 23	R <sub>23-15</sub>	6	—	—	kΩ
Output voltage of the chrominance signal					
at pin 24 (peak-to-peak value)	V <sub>24-15(p-p)</sub>	—	490	—	mV
Signal suppression at output (pin 24)					
during colour killing	α <sub>24</sub>	35	—	—	dB
D.C. output voltage					
during colour-on	V <sub>24-15</sub>	—	2,4	—	V
during colour-off (killed)	V <sub>24-15</sub>	—	0,7	—	V
<b>Subcarrier mixer</b>					
627 kHz input voltage; sine-wave					
(peak-to-peak value)	V <sub>13-15(p-p)</sub>	220	—	—	mV
Input resistance	R <sub>13-15</sub>	1	—	—	kΩ
D.C. output voltage	V <sub>12-15</sub>	—	7,9	—	V
5,06 MHz output voltage selective**					
(peak-to-peak value)	V <sub>12-15(p-p)</sub>	—	800	—	mV
Signal suppression at output**					
for f = 4,43 MHz	α <sub>12</sub>	20	—	—	dB
for f = 5,68 MHz	α <sub>12</sub>	30	—	—	dB
<b>Subcarrier input</b>					
5,06 MHz input voltage (peak-to-peak value)	V <sub>6-15(p-p)</sub>	250	—	—	mV
Input resistance	R <sub>6-15</sub>	1,9	—	—	kΩ
Input capacitance	C <sub>6-15</sub>	—	—	5	pF

\* Chrominance signal values hold for a 75% saturated colour bar signal.

\*\* Measured with a 0,32 V (peak-to-peak), 627 kHz input signal on pin 13 (−I<sub>12</sub> = 1 mA).

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>4,43 MHz voltage controlled oscillator (VCO)</b>					
Input resistance	R <sub>10-15</sub>	—	430	—	Ω
Input capacitance	C <sub>10-15</sub>	—	—	10	pF
Output resistance	R <sub>11-15</sub>	—	—	200	Ω
PLL-controlled oscillator catching range	Δf	± 500	—	—	Hz
Phase difference between oscillator and burst signal for ± 400 Hz deviation of crystal frequency	φ	± 7	—	—	deg
<b>4,43 MHz fixed oscillator</b>					
Oscillator temperature coefficient*	TC	—	—	-3	Hz/K
<b>Record/playback selector (pin 21)</b>					
Input voltage for record**	V <sub>21-15</sub>	—	—	4	V
Input current with V <sub>21-15</sub> = 4 V	I <sub>21</sub>	—	—	130	μA
Input voltage for playback	V <sub>21-15</sub>	8	—	—	V
Input current with V <sub>21-15</sub> = 8 V	I <sub>21</sub>	—	—	430	μA
Input resistance	R <sub>21-15</sub>	7	—	—	kΩ
<b>Colour (on/off) killer delay</b>					
Delay for chrominance signal OFF at ΔV = 1 V; C = 1 μF; PNP emitter follower with internal current of 0,1 mA	t <sub>d</sub>	—	10	—	ms
Input voltage (pin 18) for forced colour ON	V <sub>18-15</sub>	—	—	4	V
for forced colour OFF	V <sub>18-15</sub>	5,5	—	9	V
<b>Voltage stabilizer (pin 8)</b>					
Range of external reference voltage	V <sub>8-15</sub>	5,3	—	5,8	V
Input current	-I <sub>8</sub>	—	—	120	μA

\* Not considering the effects of external components.


\*\* Pin open: record.



parameter	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse input (pin 16)</b>					
Input voltage for burst keying	V <sub>16-15</sub>	7,1	—	—	V
Input current	I <sub>16</sub>	—	—	5	μA
Delay time of BK	t <sub>d</sub>	—	0,55	—	μs
Input voltage for triggering of flip-flop	V <sub>16-15</sub>	2	—	—	V
<b>Fast phase correction</b>					
Input voltage* (peak-to-peak value)	V <sub>19-15(p-p)</sub>	200	—	400	mV
Input resistance	R <sub>19-15</sub>	3,3	—	—	kΩ
Output voltage					
<i>without correction</i>					
below phase differences of ± 50°					
at I <sub>20</sub> < ± 20 μA and V <sub>17-15</sub> < 6,5 V	V <sub>20-15</sub>	—	—	5,2	V
<i>with correction</i>					
above phase differences of ± 65°					
at I <sub>20</sub> < ± 20 μA and V <sub>17-15</sub> > 7,1 V	V <sub>20-15</sub>	9	—	—	V
Output resistance	R <sub>20-15</sub>	—	35	—	kΩ

\* Phase difference between output pin 14 and input pin 19 should be φ = 90°.

APPLICATION INFORMATION

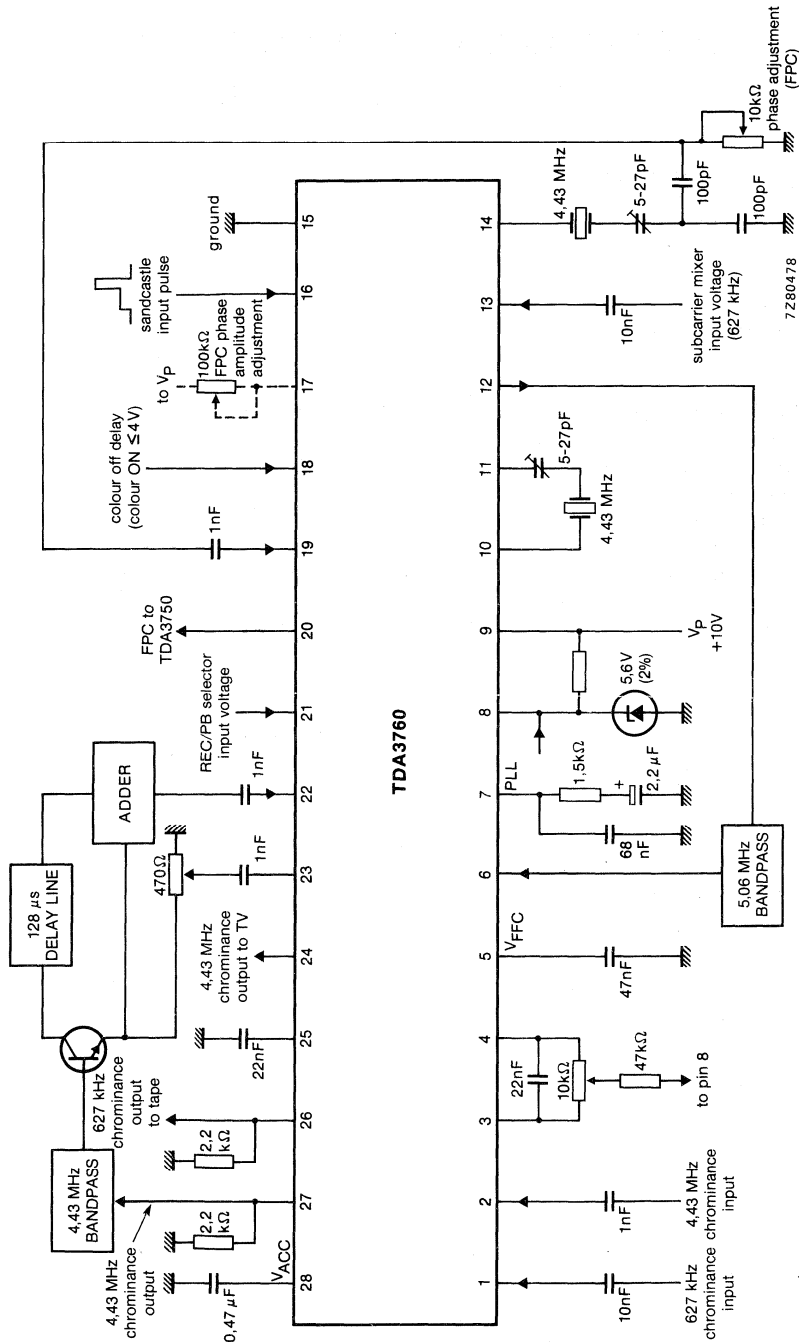

REC = record  
 PB = playback  
 FPC = fast phase correction  
 FFC = flip-flop correction

Fig. 2 Application diagram.

## NTSC CHROMINANCE SIGNAL PROCESSOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3765 is a monolithic integrated circuit for chrominance signal processing in video recorders.

### Features

- Automatic gain controlled pre-amplifier with record/playback selection
- Signal mixer with balancing stage
- Output stage for the 629 kHz chrominance signal, with facility for being disabled by colour killer and record/playback mode switch
- Amplitude detector with automatic gain control for the preamplifier
- 3,58 MHz voltage controlled oscillator (VCO) for recording and playback
- 3,58 MHz fixed oscillator for playback
- Phase detector controlled synchronization of the VCO
- Subcarrier mixer
- Sandcastle pulse processing
- Colour killing stage with hysteresis
- Internal record/playback selection
- Second phase detector for fast phase correction of sub-carrier

### QUICK REFERENCE DATA

---

Supply voltage (pin 9)	$V_P = V_{9-15}$	typ.	10 V
Supply current (pin 9)	$I_P = I_9$	typ.	45 mA

### Inputs

Chrominance signal

3,58 MHz for record (peak-to-peak value)	$V_{2-15(p-p)}$	typ.	200 mV
629 kHz for playback (peak-to-peak value)	$V_{1-15(p-p)}$	typ.	200 mV

### Outputs

Chrominance signal

3,58 MHz (peak-to-peak value)	$V_{24-15(p-p)}$	typ.	490 mV
629 kHz (peak-to-peak value)	$V_{26-15(p-p)}$	typ.	2 V

---

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

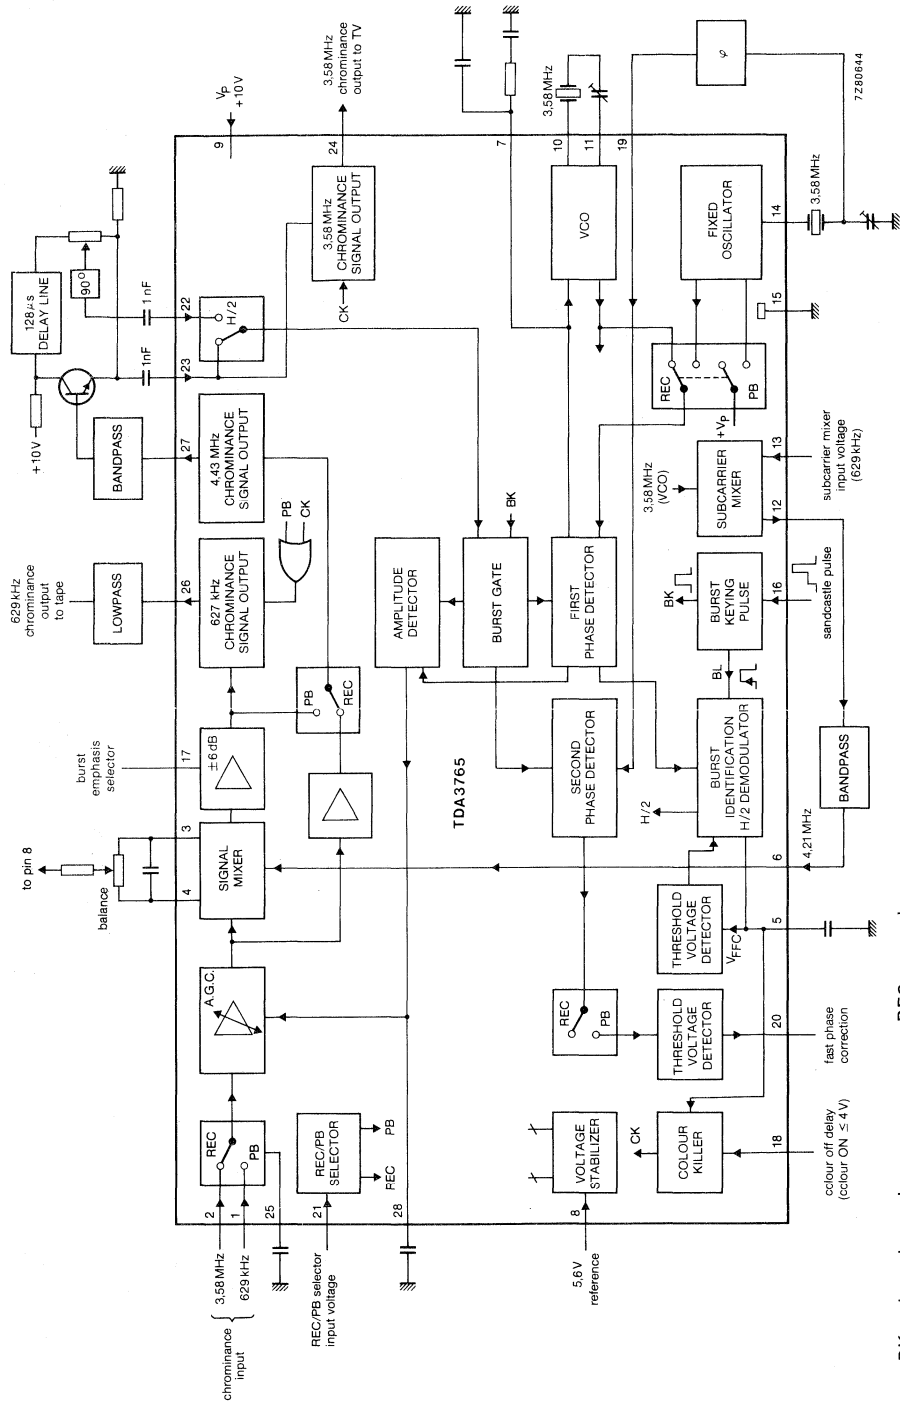


Fig. 1 Block diagram.

- BK = burst key pulse
- BL = blanking pulse
- FFC = flip-flop correction
- FPC = fast phase correction
- REC = record
- PB = playback
- CK = colour-killer

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 9)	$V_P = V_{9-15}$	max.	13,2 V
Voltage range at pins 1, 2, 5, 7, 8, 9, 16, 18, 19, 20, 21, 22, 23 to pin 15 (ground)	$V_{n-15}$		0 to $V_P$ V
Voltages ranges			
at pins 3, 4, 28*	$V_{3, 4, 28-15}$		3 to 6 V
at pin 6, 25*	$V_{6, 25-15}$		0 to 5 V
at pin 10*	$V_{10-15}$		1,5 to 4 V
at pin 13*, 17*	$V_{13, 17-15}$		0 to 3 V
at pin 14*	$V_{14-15}$		0 to 8 V
Voltages			
at pin 12	$V_{12-15}$	max.	$V_P$ V
at pin 24	$V_{24-15}$	max.	7 V
Currents			
at pins 11, 18	$-I_{11, 18}$	max.	2 mA
at pins 12, 26, 27	$-I_{12, 26, 27}$	max.	5 mA
at pin 24	$-I_{24}$	max.	3 mA
Total power dissipation	$P_{tot}$	max.	1,4 W
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		0 to + 70 °C

\* Measured with  $V_{8-15} = 5,6$  V.

## CHARACTERISTICS

$V_P = V_{9-15} = 10 \text{ V}$ ;  $V_{8-15} = 5,6 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; burst key duration  $4 \mu\text{s}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 9)</b>					
Supply voltage	$V_P = V_{9-15}$	9,6	—	13,2	V
Supply current for playback and burst keying at $-I_{12, 18, 24, 26, 27} = 0$	$I_P = I_9$	—	47	—	mA
at $-I_{12, 18, 24, 26, 27} = 0$ ; $V_P = 12 \text{ V}$	$I_P = I_9$	—	49	—	mA
<b>A.G.C. preamplifier (pins 1 and 2)</b>					
Input voltage* (f = 3,58 MHz) during record (peak-to-peak value)	$V_{2-15(p-p)}$	20	—	400	mV
Input voltage* (f = 629 kHz) during playback (peak-to-peak value)	$V_{1-15(p-p)}$	30	—	400	mV
Input resistance	$R_{1, 2-15}$	7	—	—	k $\Omega$
Input capacitance	$C_{1, 2-15}$	—	—	5	pF
<b>629 kHz chrominance signal (pin 26)* (transposed on to 629 kHz signal)</b>					
Output voltage (peak-to-peak value)	$V_{26-15(p-p)}$	—	2	—	V
Signal suppression at output for f = 1,26 MHz	$\alpha_{26}$	—	35	—	dB
for f = 4,21 MHz (externally balanced via pins 3 and 4)	$\alpha_{26}$	—	40	—	dB
during colour killing (pin 25)	$\alpha_{26}$	40	—	—	dB
D.C. output voltage	$V_{26-15}$	—	6,7	—	V
<b>3,58 MHz chrominance signal (pin 27)*</b>					
Output voltage during record (peak-to-peak value)	$V_{27-15(p-p)}$	—	1,15	—	V
during playback after signal mixing (peak-to-peak value)	$V_{27-15(p-p)}$	—	—	3,1	V
Signal suppression at output for f = 4,21 MHz (externally balanced)	$\alpha_{27}$	—	40	—	dB
for f = 7,16 MHz	$\alpha_{27}$	—	30	—	dB
for f = 2,95 MHz	$\alpha_{27}$	—	38	—	dB
for f = 2,32 MHz	$\alpha_{27}$	—	30	—	dB
D.C. output voltage	$V_{27-15}$	—	7	—	V

\* The chrominance signal values hold for a 75% saturated colour bar signal.

parameter	symbol	min.	typ.	max.	unit
<b>3,58 MHz chrominance signal amplifier*</b>					
Burst input signal					
at pin 22 (peak-to-peak value)	$V_{22-15(p-p)}$	—	225	—	mV
at pin 23 (peak-to-peak value)	$V_{23-15(p-p)}$	—	225	—	mV
Input resistance					
at pin 22	$R_{22-15}$	6	—	—	k $\Omega$
at pin 23	$R_{23-15}$	6	—	—	k $\Omega$
Output voltage of the chrominance signal					
at pin 24 (peak-to-peak value)	$V_{24-15(p-p)}$	—	490	—	mV
Signal suppression at output (pin 24)					
during colour killing	$\alpha_{24}$	35	—	—	dB
D.C. output voltage					
during colour-on	$V_{24-15}$	—	2,4	—	V
during colour-off (killed)	$V_{24-15}$	—	0,7	—	V
<b>Subcarrier mixer</b>					
629 kHz input voltage; sine-wave					
(peak-to-peak value)	$V_{13-15(p-p)}$	220	—	—	mV
Input resistance	$R_{13-15}$	1	—	—	k $\Omega$
D.C. output voltage	$V_{12-15}$	—	7,9	—	V
4,21 MHz output voltage selective**					
(peak-to-peak value)	$V_{12-15(p-p)}$	—	800	—	mV
Signal suppression at output**					
for $f = 3,58$ MHz	$\alpha_{12}$	20	—	—	dB
for $f = 4,84$ MHz	$\alpha_{12}$	30	—	—	dB
<b>Subcarrier input</b>					
4,21 MHz input voltage (peak-to-peak value)	$V_{6,15(p-p)}$	250	—	—	mV
Input resistance	$R_{6-15}$	1,9	—	—	k $\Omega$
Input capacitance	$C_{6-15}$	—	—	5	pF
<b>3,58 MHz voltage controlled oscillator (VCO)</b>					
Input resistance	$R_{10-15}$	—	430	—	$\Omega$
Input capacitance	$C_{10-15}$	—	—	10	pF
Output resistance	$R_{11-15}$	—	—	200	$\Omega$
PLL-controlled oscillator catching range	$\Delta f$	$\pm 500$	—	—	Hz
Phase difference between oscillator and burst					
signals for $\pm 400$ Hz deviation of crystal					
frequency	$\varphi$	—	—	$\pm 7$	deg

\* Chrominance signal values hold for a 75% saturated colour bar signal.

\*\* Measured with a 0,32 V (peak-to-peak), 629 kHz input signal on pin 13 ( $-I_{12} = 1$  mA).

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>3,58 MHz fixed oscillator</b>					
Oscillator temperature coefficient*	TC	—	—	−3	Hz/K
<b>Record/playback selector (pin 21)</b>					
Input voltage for record**	V <sub>21-15</sub>	—	—	4	V
Input current with V <sub>21-15</sub> = 4 V	I <sub>21</sub>	—	—	130	μA
Input voltage for playback	V <sub>21-15</sub>	8	—	—	V
Input current with V <sub>21-15</sub> = 8 V	I <sub>21</sub>	—	—	430	μA
Input resistance	R <sub>21-15</sub>	7	—	—	kΩ
<b>Colour (on/off) killer delay</b>					
Delay for chrominance signal OFF at AV = 1 V; C = 1 μF; PNP emitter follower with internal current of 0,1 mA	t <sub>d</sub>	—	10	—	ms
Input voltage (pin 18) for forced colour ON	V <sub>18-15</sub>	—	—	4	V
for forced colour OFF	V <sub>18-15</sub>	5,5	—	9	V
<b>Voltage stabilizer (pin 8)</b>					
Range of external reference voltage	V <sub>8-15</sub>	5,3	—	5,8	V
Input current	−I <sub>8</sub>	—	—	120	μA
<b>Sandcastle pulse input (pin 16)</b>					
Input voltage for burst keying	V <sub>16-15</sub>	7,1	—	—	V
Input current	I <sub>16</sub>	—	—	5	μA
Delay time of BK	t <sub>d</sub>	—	0,55	—	μs
Input voltage for triggering of flip-flop	V <sub>16-15</sub>	2	—	—	V
<b>Fast phase correction</b>					
Input voltage▲ (peak-to-peak value)	V <sub>19-15(p-p)</sub>	200	—	400	mV
Input resistance	R <sub>19-15</sub>	3,3	—	—	kΩ
Output voltage without correction below phase differences of ± 50° at I <sub>20</sub> < ± 20 μA and V <sub>17-15</sub> = < 6,5 V	V <sub>20-15</sub>	—	—	5,2	V
with correction above phase differences of ± 65° at I <sub>20</sub> < ± 20 μA and V <sub>17-15</sub> = > 7,1 V	V <sub>20-15</sub>	9	—	—	V
Output resistance	R <sub>20-15</sub>	—	35	—	kΩ

\* Not considering the effects of external components.


\*\* Pin open: record.

▲ Phase difference between output pin 14 and input pin 19 should be φ = 90°.



parameter	symbol	min.	typ.	max.	unit
<b>Burst emphasis selector (pin 17)</b>					
Input voltage active emphasis	V <sub>17-15</sub>		open connection		
Input voltage inactive emphasis	V <sub>17-15</sub>	—	—	0,5	V
Burst pre-emphasis at REC chroma output pin 26		—	6	—	dB
Burst de-emphasis at PB chroma output pin 27		—	5,3	—	dB

APPLICATION INFORMATION

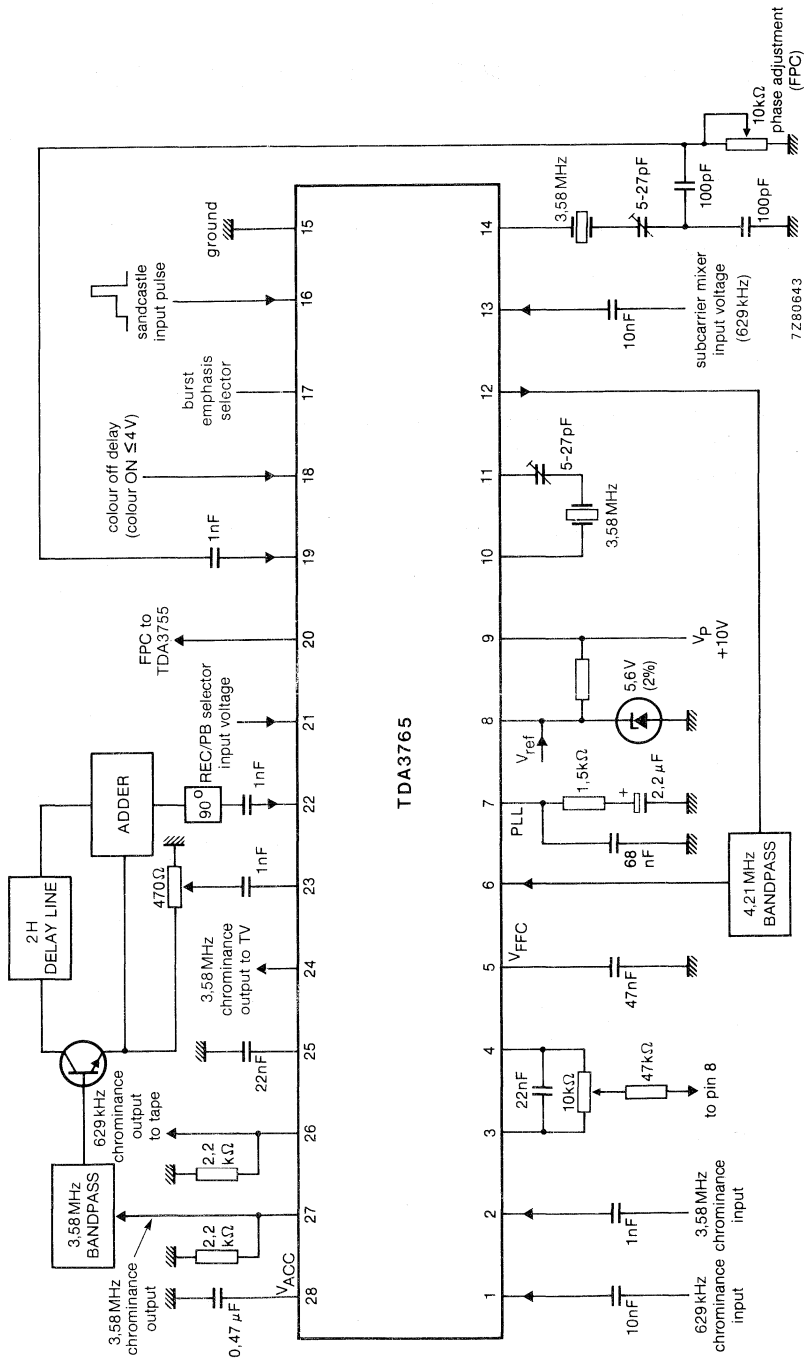

- REC = record
- PB = playback
- FPC = fast phase correction
- FFC = flip-flop correction

Fig. 2 Application diagram.

## VIDEO PROCESSOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3771 is a monolithic integrated circuit for video signal processing in video recorders. It incorporates the following features:

#### Features

- 3 channel input selector
- 4 dB preamplifier
- A.G.C. amplifier:
  - during record: controlled to sync pulse level and peak white level
  - during playback: controlled to sync pulse level
- Gated clamping control stage
- Regeneration of the sync pulse
- Adder stage for the luminance signal (with reinserted sync pulse) and chrominance signal
- Emitter follower output stage for the luminance signal (composite video)
- Two emitter follower output stages for the composite colour video signal.

### QUICK REFERENCE DATA

Supply voltage (pin 14)	$V_P = V_{14-11}$	typ.	12 V
Supply current (pin 14)	$I_P = I_{14}$	typ.	60 mA
<b>Preamplifier</b>			
Composite colour video input signals (peak-to-peak value)	$V_{2,3,4-11(p-p)}$	typ.	1 V
Gain	$G_{18-2,3,4}$	typ.	4 dB
<b>A.G.C. amplifier</b>			
Composite video signal (peak-to-peak value)	$V_{12-11(p-p)}$	typ.	0,4 V ± 6 dB
Composite video output signal (controlled) (peak-to-peak value)	$V_{6-11(p-p)}$	typ.	4 V
<b>Adder stage</b>			
Chrominance input voltage (peak-to-peak value)	$V_{16-11(p-p)}$	typ.	0,3 V
Gain	$G_{15,17-16}$	typ.	12 dB
Composite colour video output signals (peak-to-peak value)			
negative going	$V_{15-11(p-p)}$	typ.	2 V
positive going	$V_{17-11(p-p)}$	typ.	2 V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

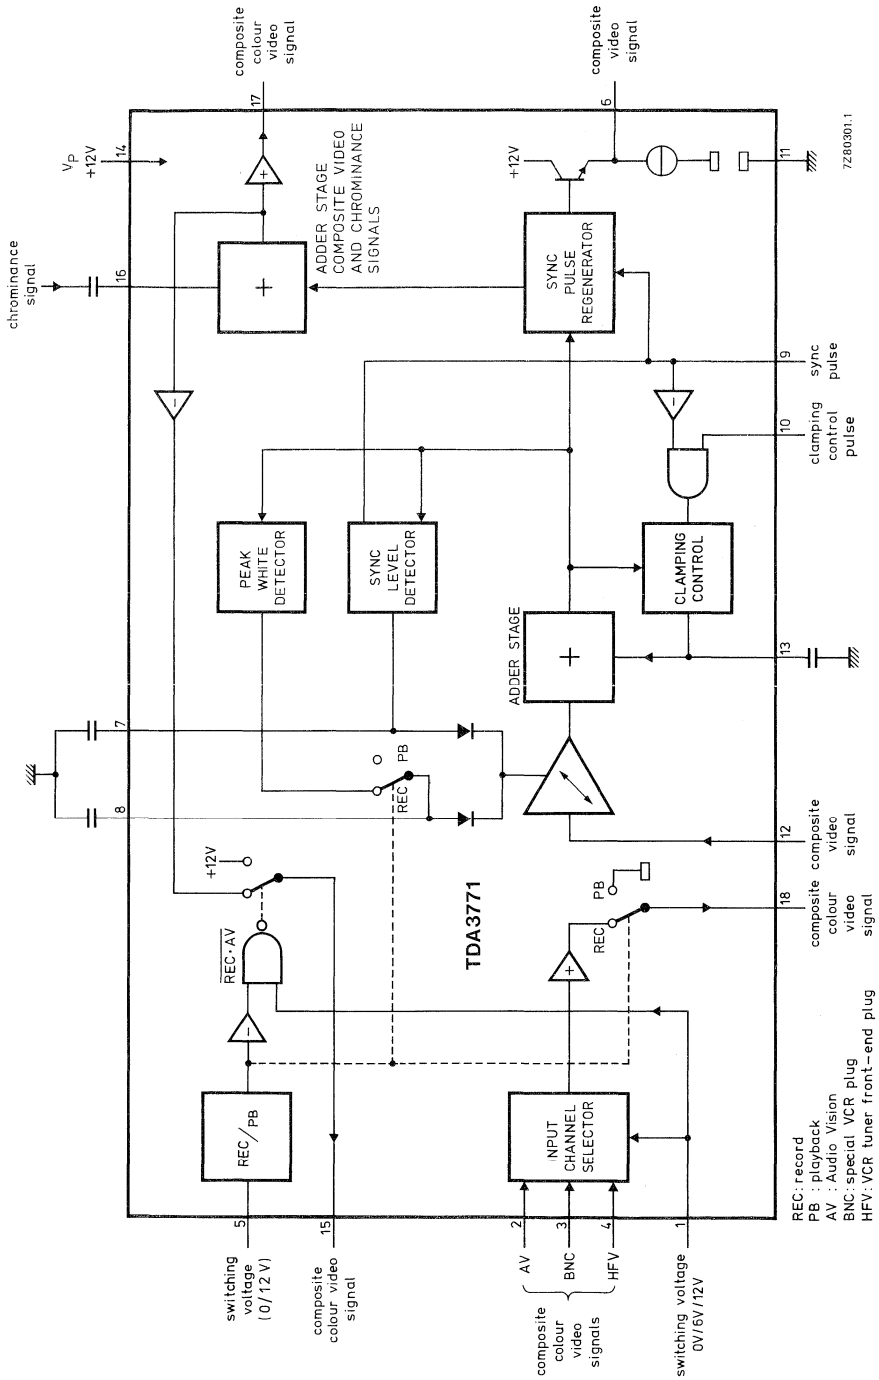


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range (pin 14)	$V_P = V_{14-11}$	0 to 13,2 V
Voltage range at pins 1, 5, 9, 10, 12, 16 to pin 11 (ground)	$V_{n-11}$	0 to $V_P$ V
Voltage ranges at pins 2, 3, 4	$V_{2, 3, 4-11}$	0 to $0,8V_P$ V
at pins 7, 8	$V_{7, 8-11}$	$0,7V_P$ to $V_P$ V
at pin 13	$V_{13-11}$	$0,25V_P$ to $V_P$ V
Currents		
at pins 6, 15, 17	$I_{6,15,17}$	max. 10 mA
at pin 18	$I_{18}$	max. 20 mA
Total power dissipation	$P_{tot}$	max. 1 W
Storage temperature range	$T_{stg}$	-25 to +150 °C
Operating ambient temperature range	$T_{amb}$	0 to +70 °C


## CHARACTERISTICS

$V_P = V_{14-11} = 12 \text{ V}$ ; trigger pulse on pin 10 with a width of  $4 \mu\text{s}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in test circuit Fig. 2; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 14)</b>					
Supply voltage	$V_P = V_{14-11}$	9,6	—	13,2	V
Supply current	$I_P = I_{14}$	—	60	—	mA
<b>Input channel selector</b>					
Input resistance	$R_{1-11}$	—	7,5	—	$k\Omega$
Internal bias voltage	$V_{1-11}$	—	6	—	V
Selector switching voltages on pin 1-11 to select input pin 4	$V_{1-11}$	—	—	2	V
to select input pin 3	$V_{1-11}$	4	—	8	V
to select input pin 2	$V_{1-11}$	10	—	—	V
<b>Preamplifier</b>					
Composite colour video input signals (peak-to-peak value)	$V_{2,3,4-11(p-p)}$	—	2	—	V
Input resistance	$R_{2,3,4-11}$	—	10	—	$k\Omega$
Input capacitance	$C_{2,3,4-11}$	—	10	—	pF
Gain	$G_{18-2,3,4}$	—	4	—	dB
D.C. output voltage during record	$V_{18-11}$	—	—	5,8	V
during playback	$V_{18-11}$	—	1	—	V
Frequency response (0 to 3 MHz)	$\alpha_{18-2,3,4}$	—	—	1	dB
Signal suppression at output (pin 18) with no input selected	$\alpha_{18}$	43	—	—	dB
during playback	$\alpha_{18}$	50	—	—	dB
<b>A.G.C. amplifier</b>					
Input voltage (composite video signal) (peak-to-peak value)	$V_{12-11(p-p)}$	—	$0,4 \pm 6 \text{ dB}$	—	V
Input resistance	$R_{12-11}$	—	10	—	$k\Omega$
Input capacitance	$C_{12-11}$	—	10	—	pF
Frequency response (0 to 3 MHz)	$\alpha_{15,17-12}$	—	1	—	dB
<b>Peak-white and sync-pulse level detectors</b>					
Capacitor currents					
charging current on pin 8	$-I_8$	—	15	—	mA
discharging current on pin 8	$I_8$	—	0,8	—	$\mu\text{A}$
charging current on pin 7	$-I_7$	—	0,3	—	mA
discharging current on pin 7	$I_7$	—	0,3	—	mA

parameter	symbol	min.	typ.	max.	unit
<b>Gated clamping control and sync pulse regeneration</b>					
Threshold voltage for clamping control ON $V_{9-11} = 0 \text{ V}$	$V_{10-11}$	7	—	—	V
Input current	$-I_{10}$	—	—	50	$\mu\text{A}$
Threshold voltage for active sync pulse generation and clamping control OFF	$V_{9-11}$	6	—	—	V
Input current	$-I_9$	—	—	50	$\mu\text{A}$
Charging current	$-I_{13}$	—	0,3	—	mA
Discharging current	$I_{13}$	—	0,3	—	mA
Black level voltage	$V_{6-11}$	—	5,5	—	V
Sync pulse cut-off level	$V_{6-11}$	—	5,2	—	V
Controlled output signal (peak-to-peak value)	$V_{6-11(p-p)}$	—	4,0	—	V
<b>Record/playback selector</b>					
Input voltage for playback	$V_{5-11}$	7	—	—	V
for record	$V_{5-11}$	—	—	5	V
Input current	$-I_5$	—	—	50	$\mu\text{A}$
<b>Chrominance signal adder and output stage</b>					
Input voltage (peak-to-peak value)	$V_{16-11(p-p)}$	—	0,3	—	V
Gain	$G_{15,17-16}$	—	12	—	dB
Input resistance	$R_{16-11}$	—	10	—	$\text{k}\Omega$
Input capacitance	$C_{16-11}$	—	10	—	pF
Output signal (peak-to-peak values)					
composite colour video signal: negative	$V_{15-11(p-p)}$	—	2	—	V
composite colour video signal: positive	$V_{17-11(p-p)}$	—	2	—	V
2nd harmonic suppression	$\alpha_{17}$	40	—	—	dB
Black level					
composite colour video signal: negative	$V_{15-11}$	—	9,3	—	V
composite colour video signal: positive	$V_{17-11}$	—	3,7	—	V
Signal suppression during record and with input pin 2 selected	$\alpha_{15}$	40	—	—	dB
D.C. voltage during record and with input pin 2 selected	$V_{15-11}$	—	12	—	V
Output resistance during record and with input pin 2 selected	$R_{15-11}$	—	30	—	$\text{k}\Omega$

APPLICATION INFORMATION

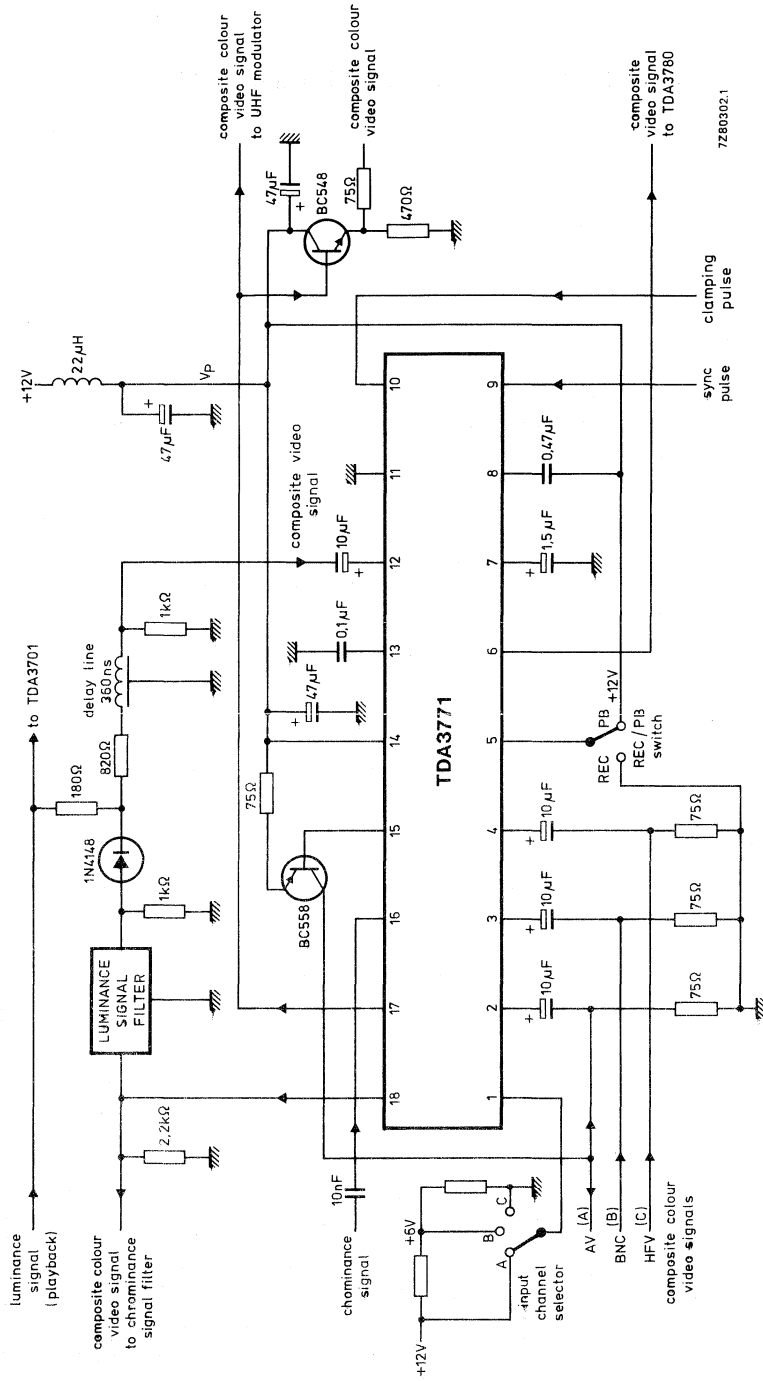

7280302.1

Fig. 2 Application diagram; also used as test circuit.



## FREQUENCY MODULATOR FOR VIDEO RECORDERS

### GENERAL DESCRIPTION

The TDA3780 is a monolithic integrated circuit for frequency modulation in video recorders.

#### Features

- Voltage clamping control stage
- Two-stage amplification of the luminance signal with dynamic (adjustable) and linear pre-emphasis
- Adjustable white limiter
- Voltage controlled oscillator (VCO)
- Limiting stage with facility to disconnect from output stage
- Blanking pulse for VCO and output stage

### QUICK REFERENCE DATA

Supply voltage (pin 1)	$V_P = V_{1-18}$	typ. 12 V
Supply current (pin 1)	$I_P = I_1$	typ. 52 mA
<b>Clamping stage and pre-emphasis (dynamic) amplifier</b>		
Luminance input signal (pin 2) (peak-to-peak value)	$V_{2-18(p-p)}$	typ. 2,0 V
Output voltage (pin 4)	$V_{4-18}$	2,5 to 8,0 V
<b>Pre-emphasis (linear) amplifier stage</b>		
Output voltage (pin 7)	$V_{7-18}$	2,5 to 8,0 V
<b>Oscillator</b>		
Output frequency	$f_{osc}$	typ. 3,3 MHz
<b>Output stage</b>		
D.C. output voltage	$V_{17-18}$	typ. 6,0 V
FM signal output voltage (peak-to-peak value)	$V_{17-18(p-p)}$	typ. 4,2 V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

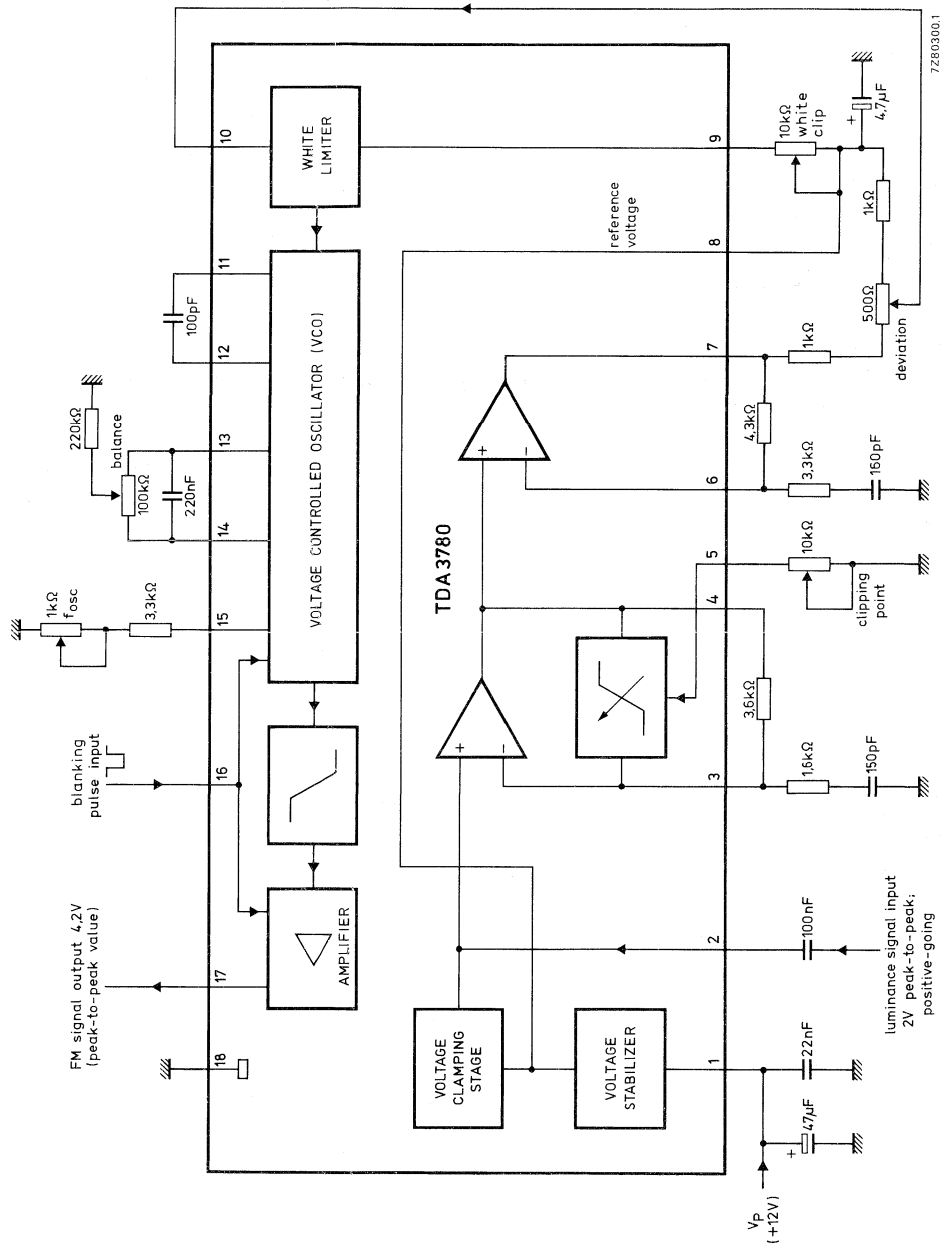


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_P = V_{1-18}$	max.	13,2 V
Voltage range at pins 2, 3, 4, 5, 6, 7, 9, 10, 13, 14, 15, 16, 17 to pin 18 (ground)	$V_{n-18}$		0 to $V_P$ V
Voltage at pin 8	$V_{8-18}$	max.	10 V
Currents at pins 11 and 12	$\pm I_{11, 12}$	max.	5 mA
Total power dissipation	$P_{tot}$	max.	920 mW
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		0 to + 70 °C

**CHARACTERISTICS**

$V_P = V_{1-18} = 12$  V; balancing the 2nd harmonic to the minimum level;  $T_{amb} = 25$  °C; measured in test circuit Fig. 1; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 1)</b>					
Supply voltage	$V_P = V_{1-18}$	9,6	12	13,2	V
Supply current	$I_P = I_1$	—	52	—	mA
Reference voltage	$V_{8-18}$	—	4	—	V
<b>Clamping stage and pre-emphasis (dynamic) amplifier</b>					
Luminance input signal (pin 2) (peak-to-peak value)	$V_{2-18(p-p)}$	—	2	—	V
Input impedance at $V_{2-18} < V_{8-18}$ ; $-I_2 = 1$ mA	$ Z_{2-18} $	—	25	—	$\Omega$
Input current at $V_{2-18} > V_{8-18}$	$I_2$	—	2	—	$\mu$ A
Input bias current	$I_3$	—	1	—	$\mu$ A
Clamping voltage for the input signal clamped at top sync	$V_{2-18}$	—	4	—	V
Gain-bandwidth product		30	—	—	MHz
Output voltage (pin 4)	$V_{4-18}$	2,5	—	8	V
Start of gain reduction (adjustable at pin 5)	$V_{4-3}$	100	—	—	mV

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Pre-emphasis (linear) amplifier</b>					
Input bias current	$I_6$	—	—	1	$\mu\text{A}$
Gain-bandwidth product		—	30	—	MHz
Output voltage (pin 7)	$V_{7-18}$	2,5	—	8	V
<b>White limiter (pin 10)</b>					
Limitation					
at $I_9 = 0$	$V_{10-18}$	7,5	—	—	V
at $I_9 = 0,5 \text{ mA}$	$V_{10-18}$	—	4	—	V
<b>Voltage controlled oscillator (VCO)</b>					
Output frequency					
with $C_{\text{osc}} = 100 \text{ pF}$ (pin 11-12); $R_{\text{osc}} = 3,8 \text{ k}\Omega$ (pin 15)	$f_{\text{osc}}$	3,04	3,30	3,56	MHz
Oscillator steepness	$f_{\text{osc}}/\Delta V_{10-18}$	—	1,5	—	MHz/V
<b>FM output signal switching stage</b>					
Input voltage to switch FM off	$V_{16-18}$	—	—	4	V
Input voltage to switch FM on	$V_{16-18}$	6	—	—	V
Output voltage suppression with FM switched off	$\alpha_0$	50	—	—	dB
<b>Output stage (pin 17)</b>					
D.C. output voltage	$V_{17-18}$	—	6	—	V
FM signal output voltage (peak-to-peak value)	$V_{17-18(\text{p-p})}$	—	4,2	—	V
Suppression of the 2nd harmonic					
$V$ (1st harmonic)					
$V$ (2nd harmonic)	$\alpha_{\text{harm}}$	40	—	—	dB
AM suppression	$\alpha_{\text{AM}}$	40	—	—	dB
Crosstalk between output and input	$\frac{V_{17-18}}{V_{2-18}}$	40	—	—	dB

## BAND SELECTOR AND WINDOW DETECTOR

### GENERAL DESCRIPTION

The TDA3791 is a monolithic integrated circuit intended for application in search-tuning systems for video recorders. It is designed to select one out of four tuners, each representing a particular band. Band selection tuning is indicated by a variable voltage  $V_{AFC}$ .

### Features


- Voltage window detector
- Band switch selector
- 4 short-circuit protected band switches
- Muting circuit
- Delay circuit
- Short-circuit protection circuit
- Power-on reset

### QUICK REFERENCE DATA

Supply voltage (pin 8)	$V_P = V_{8.16}$	typ.	12 V
Supply current (pin 8)	$I_P = I_8$		
unloaded band switches ON		typ.	25 mA
all band switches OFF		typ.	12 mA
Power dissipation	$P_{tot}$	max.	1,8 W
Storage temperature range	$T_{stg}$		-65 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to 70 °C

### PACKAGE OUTLINE

16-lead DIL; plastic with internal heat spreader (SOT-38).

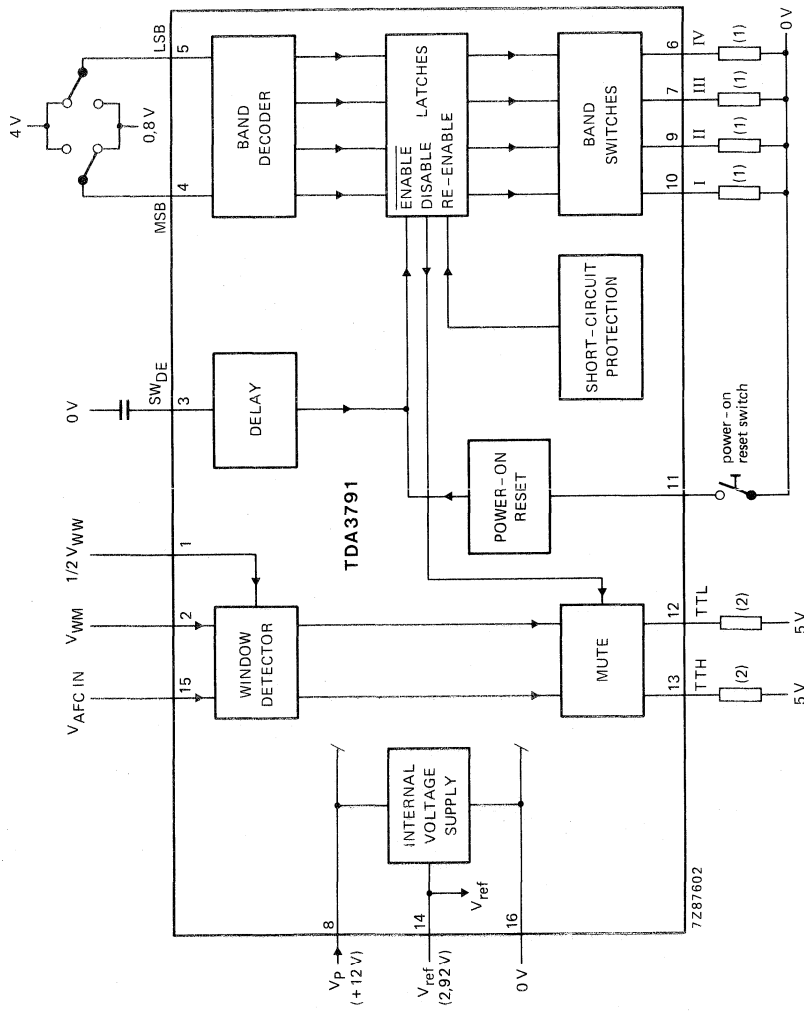

$$(1) R = \frac{10 \text{ V}}{35 \text{ mA}} \quad (2) R = \frac{5 \text{ V}}{2 \text{ mA}}$$

Fig. 1 Block diagram.

**FUNCTIONAL DESCRIPTION****Voltage window detector** (see Table 1)

The voltage window is dependent upon two inputs;  $V_{WM}$  (pin 2) and  $1/2V_{WW}$  (pin 1), which represent the centre of the window and the (window width)/2 respectively.

The voltage window range is from  $V_{WM} - 1/2V_{WW}$  to  $V_{WM} + 1/2V_{WW}$ . A variable input voltage  $V_{AFC IN}$  (pin 15) is compared with these window edges.

Table 1 Truth table; window detector

inputs	outputs	
$V_{AFC IN} = V_{15-16}; V_{WM} = V_{2-16}; V_{WW} = V_{1-16}$	$V_{12-16}$	$V_{13-16}$
$V_{AFC IN} < V_{WM} - 1/2V_{WW}$	HIGH	LOW
$V_{WM} - 1/2V_{WW} < V_{AFC IN} < V_{WM} + 1/2V_{WW}$	HIGH	HIGH
$V_{AFC IN} > V_{WM} + 1/2V_{WW}$	LOW	HIGH

Where:  $V_{12-16}$  = tuning too low (TTL);  $V_{13-16}$  = tuning too high (TTH).

During transitions of the outputs ( $V_{12-16}$  and  $V_{13-16}$ ), a hysteresis value of approximately 20 mV is applied at the window edges.

**Band-switch selector** (see Table 2)

Selection of the band switches is determined by the input voltage levels of MSB (pin 4) and LSB (pin 5).

- If MSB or LSB  $> 4$  V, the input is HIGH
- If MSB or LSB  $< 0,8$  V, the input is LOW.

The band switches are selected as confirmed by Table 2.

Table 2 Truth table; band switch selector

MSB ( $V_{4-16}$ )	LSB ( $V_{5-16}$ )	switch	HIGH output
HIGH	HIGH	I	$V_{10-16}$
HIGH	LOW	II	$V_{9-16}$
LOW	HIGH	III	$V_{7-16}$
LOW	LOW	IV	$V_{6-16}$

**Short-circuit protected band switches**

A selected band switch has a minimum output voltage of  $V_p - 0,3$  V provided the current is not more than 35 mA ( $I_{10}, I_9, I_7, I_6$ ). If the output voltage at pins 10, 9, 7 or 6 is less than 9 V a short-circuit condition exists, and the output current will not be more than 80 mA. In this event the band switch is switched off, after an externally determined delay.

**Muting**

The muting circuit is active when a selected band switch is switched off. Both outputs TTL (pin 12) and TTH (pin 13) will then be LOW.

**FUNCTIONAL DESCRIPTION** (continued)**Delay circuit**

After selection of a band switch, it will be in a conducting state. If after selection and a delay, the output voltage has not reached 9 V, the band is switched off. This delay is determined by an external capacitor on output SW<sub>DE</sub> (pin 3).

**Short-circuit protection**

The short-circuit protection of each switch is provided by a flip-flop. If the condition of a band switch  $V_O < 9$  V is detected, its flip-flop will be set and the band switch is switched off.

In the event of an incidental short-circuit to a band switch output, the band switch can be reset by applying 0 V to the power-on reset input (pin 11) or 0 V to the switch delay output SW<sub>DE</sub> (pin 3).

**Power-on reset**

Before the voltage supply reaches 9,6 V, the short-circuit protection flip-flops are reset to enable the selection of a band switch.

The power-on reset circuit also supplies the voltage level for short-circuit detection.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 8)	$V_P = V_{8-16}$	max.	13,2 V
Total power dissipation	$P_{tot}$		see Fig. 2
Storage temperature range	$T_{stg}$		-65 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

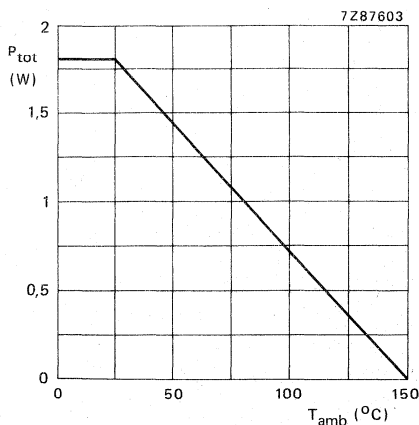


Fig. 2 Power derating curve.



## CHARACTERISTICS

$V_P = V_{8-16} = 12\text{ V}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ ; measured in Fig. 1; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage (pin 8)	$V_P = V_{8-16}$	10	12	13,2	V
Supply current (pin 8)					
unloaded band switches ON	$I_P = I_8$	18	25	38	mA
all band switches OFF	$I_P = I_8$	9	12	16	mA
<b>Voltage range</b>					
$1/2V_{WW}$ (pin 1)	$V_{1-16}$	0,1	—	4,5	V
$V_{WM}$ (pin 2)	$V_{2-16}$	1,8	—	10,5	V
$V_{WM} + 1/2V_{WW}$ at $V_{8-16} - 1,4\text{ V}$	$V_{2-16} \pm V_{1-16}$	1,7	—	10,6	V
$V_{AFC\ IN}$ (pin 15)	$V_{15-16}$	0,5	—	11,5	V
<b>Input current</b>					
$1/2V_{WW}$ (pin 1)	$-I_1$	—	—	2	$\mu\text{A}$
$V_{WM}$ (pin 2)	$I_2$	—	—	0,2	$\mu\text{A}$
$V_{AFC\ IN}$ (pin 15)	$I_{15}$	—	0,2	0,4	$\mu\text{A}$
<b>Hysteresis voltage <math>V_{AFC}^*</math></b>					
$\Delta V_{15-16}$		—	20	50	mV
<b>Delta current at <math>V_{AFC\ IN}^*</math></b>					
$\Delta I_{15}$		—	—	25	nA
<b>Temperature coefficient <math>I_{AFC\ IN}</math></b>					
$TC(I_{15})$		—	-0,42	—	nA/ $^\circ\text{C}$
<b>Temperature coefficient <math>I_{WM}</math></b>					
$TC(I_2)$		—	-0,27	—	nA/ $^\circ\text{C}$
<b>Deviation of applied voltage (pin 1)</b>					
at $V_{1-16} = 100\text{ mV}$	$\Delta V_{1-16}$	-35	—	+35	mV
at $V_{1-16} = 4,0\text{ V}$ ; $V_{2-16} = 6\text{ V}$	$\Delta V_{1-16}$	-200	—	+200	mV
<b>Input current (pin 4)</b>					
at $MSB < 0,8\text{ V}$	$I_4$	—	—	0,1	$\mu\text{A}$
at $MSB > 4\text{ V}$	$I_4$	—	—	1,0	$\mu\text{A}$
<b>Input current (pin 5)</b>					
at $LSB > 4\text{ V}$	$I_5$	—	—	1,0	$\mu\text{A}$
at $LSB < 0,8\text{ V}$	$I_5$	—	—	0,1	$\mu\text{A}$
<b>Voltage level (pin 4)</b>					
at $MSB\ HIGH$	$V_{4-16}$	4	—	—	V
at $MSB\ LOW$	$V_{4-16}$	—	—	0,8	V
<b>Voltage level (pin 5)</b>					
at $LSB\ HIGH$	$V_{5-16}$	4	—	—	V
at $LSB\ LOW$	$V_{5-16}$	—	—	0,8	V
<b>Short-circuit current of band switches</b>					
I, II, III, IV (pins 10, 9, 7, 6)	$-I_{10, 9, 7, 6}$	35	50	80	mA
<b>Voltage drop of band switches</b>					
I, II, III, IV (pins 10, 9, 7, 6)					
at $I_{O(max)} = 35\text{ mA}$ ; $V_P = 10\text{ V}$	$V_{10, 9, 7, 6-16}$	—	—	0,3	V

\* During switching of outputs  $V_{12-16}$  and/or  $V_{13-16}$ .

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
Voltage level short-circuit detection at 0,75V <sub>p</sub>	V <sub>10, 9, 7, 6-16</sub>	8,0	9,0	9,5	V
Output voltage (pin 13) TTH at I <sub>13</sub> = 2 mA (LOW)	V <sub>13-16</sub>	—	—	0,3	V
Output voltage (pin 12) TTL at I <sub>12</sub> = 2 mA (LOW)	V <sub>12-16</sub>	—	—	0,3	V
Leakage current (pin 13) TTH at V <sub>13-16</sub> = 13,2 V	I <sub>13</sub>	—	—	10	μA
Leakage current (pin 12) TTH at V <sub>12-16</sub> = 13,2 V	I <sub>12</sub>	—	—	10	μA
Output current (pin 3) SW <sub>DE</sub> at V <sub>3-16</sub> = 6 V	-I <sub>3</sub>	5	12	20	μA
Maximum value of delay capacitor	C <sub>3</sub>	—	—	40	nF
Maximum delay time at ± C <sub>3</sub> (nF)/(I <sub>3</sub> /10) ms	t <sub>d</sub>	—	—	50	ms
Power-on-reset voltage	V <sub>8-16</sub>	6	—	9,6	V
Leakage current unswitched band switches at V <sub>10, 9, 7, 6-16</sub> = -12 V	I <sub>10, 9, 7, 6</sub>	—	—	5	μA

## STEREO/DUAL TV SOUND PROCESSING CIRCUITS

### GENERAL DESCRIPTION

The TDA3800G; GS are stereo/dual TV sound decoder circuits for processing an a.f. and a sound i.f. signal in TV and VCR equipment, using active filters in selective frequency processing.

In deviation of our standard terms and conditions of sale the supply of the TDA3800 (ABS) does not imply any patent indemnity whatsoever with respect to the stereo-tone patent rights of I.G.R. Germany.

### Features

- Signal processing of one a.f. signal and one i.f. signal
- 2nd i.f. limiter/amplifier and FM demodulator (5,742 MHz) for the second sound channel
- Pilot carrier processing with digital identification, hysteresis and short switching times
- De-matrixing of the signals for the two audio channels
- De-emphasis
- Two dual channel, independently controllable a.f. outputs
- Low-resistance a.f. outputs (short-circuit protected); can be used for headphone
- Standardized switched output for controlling external audio/video equipment
- Signal path control by an identification bit (also in audio/video mode)
- LED indication of selected mode (also in audio/video mode)
- Possibility to apply a.f. signals from external equipment via the de-emphasis inputs (audio/video mode)
- Mode selection of stereo/mono or sound I/sound II
  - TDA3800G dynamic selection with internal storage
  - TDA3800GS static selection

### QUICK REFERENCE DATA

Supply voltage (pin 20)	$V_P = V_{20-15}$	typ.	12 V
2nd sound i.f. input voltage for start of limiting (r.m.s. value)	$V_{i(rms)}$	typ.	50 $\mu$ V
Pilot carrier amplifier control range	$\Delta G_V$	min.	20 dB
A.F. input voltage (r.m.s. value)	$V_{i(rms)}$	typ.	1 V
A.F. demodulator output voltage (r.m.s. value)	$V_{o(rms)}$	typ.	0,6 V
LED output current	$I_{LED}$	typ.	15 mA
Signal-to-noise ratio of the a.f. signal switches	S/N	typ.	80 dB
Crosstalk in stereo mode	$\alpha_S$	min.	40 dB
Crosstalk in dual sound mode	$\alpha_{DS}$	min.	60 dB

### PACKAGE OUTLINES

28-lead DIL; plastic (SOT-117).

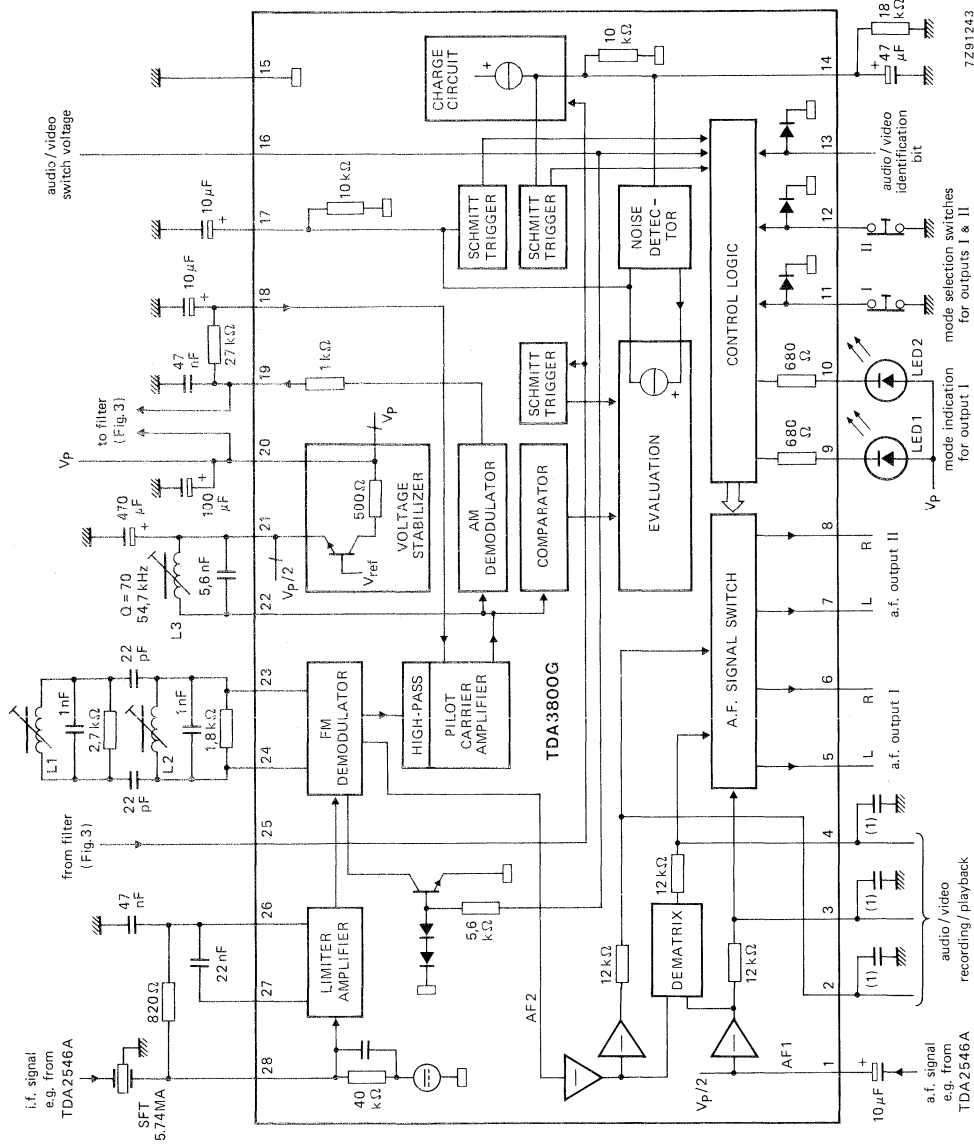


Fig. 1 TDA3800G block diagram and test circuit in accordance with Fig. 3.

- (1) De-emphasis 3,9 nF.
- (2) TDA3800G application using active filters.

**Coil data**

L1 and L2: TOKO 7 k;  
Q = 25, f<sub>0</sub> = 5,74 MHz.

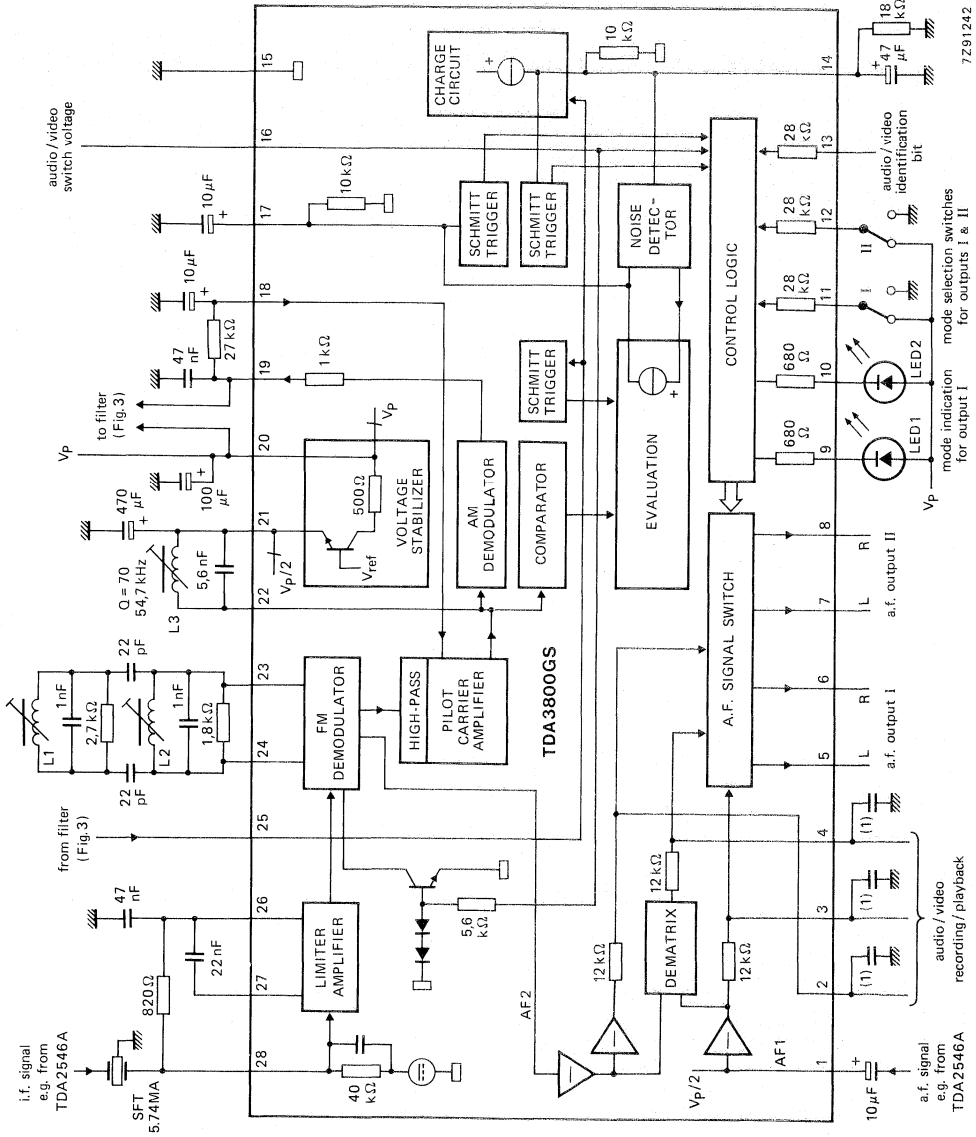


Fig. 2 TDA3800GS block diagram and test circuit in accordance with Fig. 3.

- (1) De-emphasis 3,9 nF.
- (2) TDA3800GS application using active filters.

**Coil data**

L1 and L2: TOKO 7 k;  
Q = 25, f<sub>0</sub> = 5,74 MHz.

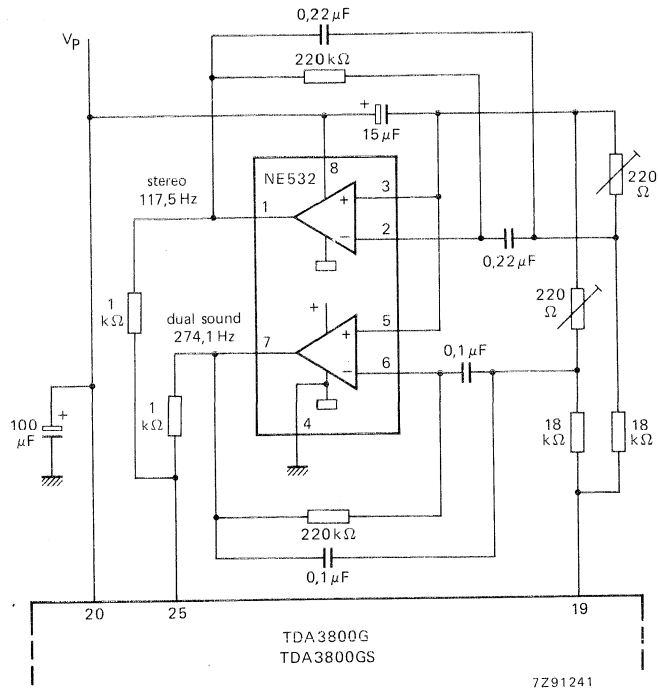


Fig. 3 External filter circuit for the identification frequencies 117,5 Hz and 247,1 Hz.

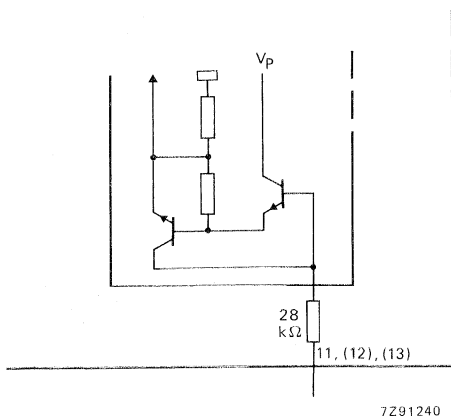


Fig. 4 TDA3800GS internal circuit for the control input leads 11, 12 and 13.

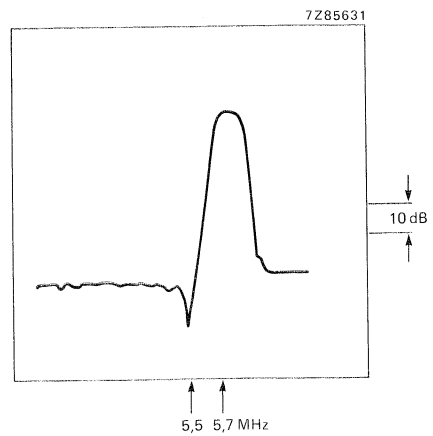


Fig. 5 IF2 filter selection.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 20)	$V_P = V_{20-15}$	max.	14 V
Voltage			
at pins 1; 9; 10; 16 and 25	$V_{n-15}$	max.	$V_P$
at pins 11; 12 and 13*	$V_{11;12;13-15}$	max.	$V_P$
Current			
at pins 11; 12 and 13**	$I_{11;12;13}$	max.	1 mA
at pin 21	short-circuit protected		
Total power dissipation	$P_{tot}$	max.	1,5 W
Storage temperature range	$T_{stg}$	-25 to +150 °C	
Operating ambient temperature range	$T_{amb}$	0 to +70 °C	

\* TDA3800GS only.

\*\* TDA3800G only.

**CHARACTERISTICS**

$V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; measured in Fig. 1/Fig. 2 with a 1 kHz signal.  $V_{1-15(rms)} = 0,5\text{ V}$ , an i.f. signal  $V_{28-15(rms)} = 5\text{ mV}$  ( $V_C/2SC = 20\text{ dB}$ ,  $\Delta f = \pm 50\text{ kHz}$ ,  $f_m = 400\text{ Hz}$ ) and with adjusted de-matrix circuit; i.f. filter selection at input pin 28 as in Fig. 5; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 20)</b>					
Supply voltage range	$V_P = V_{20-15}$	10,8	12	13,2	V
Supply current (without LED current; mono)	$I_P = I_{20}$	40	—	87	mA
<b>FM limiter/amplifier and demodulator</b>					
Start of limiting	$V_{28-15(rms)}$	—	—	60	$\mu\text{V}$
Input resistance	$R_{28-15}$	—	40	—	$\text{k}\Omega$
Input capacitance (Fig. 5)	$C_{28-15}$	—	4,5	—	pF
AM suppression at $V_i = 0,5\text{ mV}$ ; $\Delta f = \pm 30\text{ kHz}$	$\alpha_{AMS}$	50	—	—	dB
<b>Pilot carrier processing</b>					
D.C. input voltage	$V_{18-15}$	—	7,2	—	V
D.C. voltage (reference via tuning coil)	$V_{22-15}$	—	6,0	—	V
AM demodulator output voltage	$V_{19-15}$	—	7,3	—	V
Controlled pilot carrier output voltage (peak-to-peak value)	$V_{22-21(p-p)}$	—	250	—	mV
Output resistance	$R_{22-15}$	50	—	—	$\text{k}\Omega$
<b>Identification frequency evaluation</b>					
No identification signal (lower threshold)	$V_{14-15}$	—	—	2	V
Identification signal (upper threshold)	$V_{14-15}$	4	—	—	V
Stereo transmission	$V_{17-15}$	—	—	2	V
Dual sound transmission	$V_{17-15}$	4	—	—	V
<b>De-matrixing</b>					
Output voltages	$V_{2;3;4-15}$	—	5,3	—	V
De-emphasis output resistances	$R_{2;3;4-15}$	—	12	—	$\text{k}\Omega$
A.F. output signal of 2nd i.f. (r.m.s. value)	$V_{2-15(rms)}$	—	0,6	—	V
Attenuation of the demodulator output signal AF2 at audio/video mode	$\alpha_{AF2}$	75	—	—	dB
Distortion of the AF2 signal $V_{o2-15}$	$d_{tot}$	—	0,4	—	%



parameter	symbol	min.	typ.	max.	unit
<b>AF1 input</b>					
D.C. input voltage	V <sub>1-15</sub>	—	6	—	V
Input resistance	R <sub>1-15</sub>	—	14	—	kΩ
Maximum input signal (r.m.s. value)	V <sub>1-15(rms)</sub>	—	2	—	V
<b>A.F. signal switches</b>					
D.C. output voltages	V <sub>5;6;7;8-15</sub>	—	5,3	—	V
Output resistances	R <sub>5;6;7;8-15</sub>	—	200	—	Ω*
Maximum a.f. output signals (r.m.s. value)					
for V <sub>AFI</sub> (rms)	V <sub>5;6-15(rms)</sub>	—	2	—	V
for V <sub>AFII</sub> (rms)	V <sub>7;8-15(rms)</sub>	—	2	—	V
Total distortion when applying a signal at V <sub>2;3;4-15(rms)</sub> = 0,5 V	d <sub>tot</sub>	—	—	0,1	%
Signal plus noise-to-noise ratio	S + S/N	—	80	—	dB
Crosstalk attenuation					
in stereo mode (f = 1 kHz at pin 2)	α <sub>S</sub>	40	—	—	dB
in dual sound mode (f = 20 Hz to 20 kHz)	α <sub>DS</sub>	60	—	—	dB
<b>Audio/video switch</b>					
Audio/video switch voltage					
for playback (HIGH)	V <sub>16-15</sub>	7	—	V <sub>p</sub>	V
for recording (LOW)	V <sub>16-15</sub>	0	—	2,5	V
Audio/video identification bit (TDA3800G)					
for stereo mode (LOW)	V <sub>13-15</sub>	0	—	0,2	V
for dual sound mode (HIGH) at V <sub>13-15</sub> ≈ 0,7 V	I <sub>13</sub>	—	0	—	mA
Audio/video switch voltage (TDA3800GS) (stereo/dual sound)					
for stereo mode (LOW)	V <sub>13-15</sub>	—	—	0,8	V
for dual sound mode (HIGH)	V <sub>13-15</sub>	2,4	—	—	V
<b>Mode selection switches for outputs I and II</b>					
Active LOW (TDA3800G)					
input voltage LOW	V <sub>11;12-15</sub>	0	—	0,2	V
switch open condition at V <sub>11;12-15</sub> ≈ 0,7 V	I <sub>11;12</sub>	—	0	—	mA
Pulse duration	t <sub>p</sub>	1	—	—	μs

\* Connection of high-impedance headphones is possible.

CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
Switching voltage (TDA3800GS)					
Mono transmission both equals I and II mono					
Dual sound transmission					
switching voltage to pin 11 (pin 12 not affected)					
a.f. output II sound I and a.f. output I sound II	$V_{11-15}$	—	—	0,8	V
a.f. output I sound I and a.f. output II and II	$V_{11-15}$	2,4	—	—	V
Stereo transmission					
switching voltage to pin 12 (pin 11 not affected)					
a.f. outputs I and II mono	$V_{12-15}$	—	—	0,8	V
a.f. outputs I and II stereo	$V_{12-15}$	2,4	—	—	V
<b>Mode indication (pins 9 and 10; see also Table 1)</b>					
Only the mode for output I is indicated					
Maximum output current	$I_{9;10}$	—	15	—	mA
<b>Voltage stabilizer (pin 21)</b>					
Output voltage	$V_{21-15}$	—	6	—	V
Maximum d.c. output current short-circuit protected	$\pm I_{21}$	—	0,5	—	mA

Notes to the characteristics (TDA3800G only)

1. Serial commands for stereo/mono or sound I/sound II selection are determined by the identification bit of the transmission.
2. The pushbuttons at pins 11 and 12 are assigned to the a.f. outputs I and II respectively.
3. When a transmitter changes its identification from dual sound to stereo and then back to dual sound again, the last selected dual sound signal is available automatically because of the internal storage of the choice. This is also applicable for mono/stereo selection.
4. Power-on reset: when applying the supply voltage, the stereo or the AF1 signal appears at both outputs I and II depending on the type of transmission.

Table 1 Mode indication possibilities

LED 1	LED 2	selected reception mode
OFF	OFF	mono at mono or stereo transmission
ON	ON	stereo at stereo transmission
OFF	ON	AF1 signal at dual sound transmission
ON	OFF	AF2 signal at dual sound transmission

## STEREO/DUAL TV SOUND DECODER CIRCUIT

### GENERAL DESCRIPTION

The TDA3803A is a stereo/dual TV sound decoder circuit with static switching for processing two AF signals in TV and VCR equipment. The LOW/HIGH static switching signals control the AF output selector. Two operational amplifiers perform bandpass filtering of the identification signals.

### Features

- Amplification of the two AF input signals by integrated operational amplifiers
- Low distortion stereo de-matrix
- All operational amplifiers offset compensated
- De-emphasis with operational amplifiers, preferably applied to the output terminals
- Two output ports each with two channels for headphones and loudspeakers
- Dual sound information at one port, each port individually switchable from sound I to sound II and sound II to sound I
- Mute function; while mute is active, it is possible to connect an external mono AF input signal to pin 10 appearing at pins 20 to 23.
- Identification without additional signals (horizontal etc.)

### QUICK REFERENCE DATA

Supply voltage (pin 13)	$V_P = V_{13-12}$	typ.	12 V
Supply current (pin 13)	$I_P = I_{13}$	typ.	28 mA
Pilot carrier amplifier gain control range	$\Delta G_V$	>	40 dB
AF input signals; at $G_V = 0$ dB (r.m.s. value)	$V_{i(rms)}$	=	1 V
LED output current	$I_{LED}$	typ.	12 mA
Weighted signal-to-noise ratio of the a.f. signal switches (CCIR468/2)	$(S+N)/N$	$\geq$	60 dB
Crosstalk in stereo mode	$\alpha_S$	>	40 dB
Crosstalk in dual sound mode	$\alpha_{DS}$	>	60 dB

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

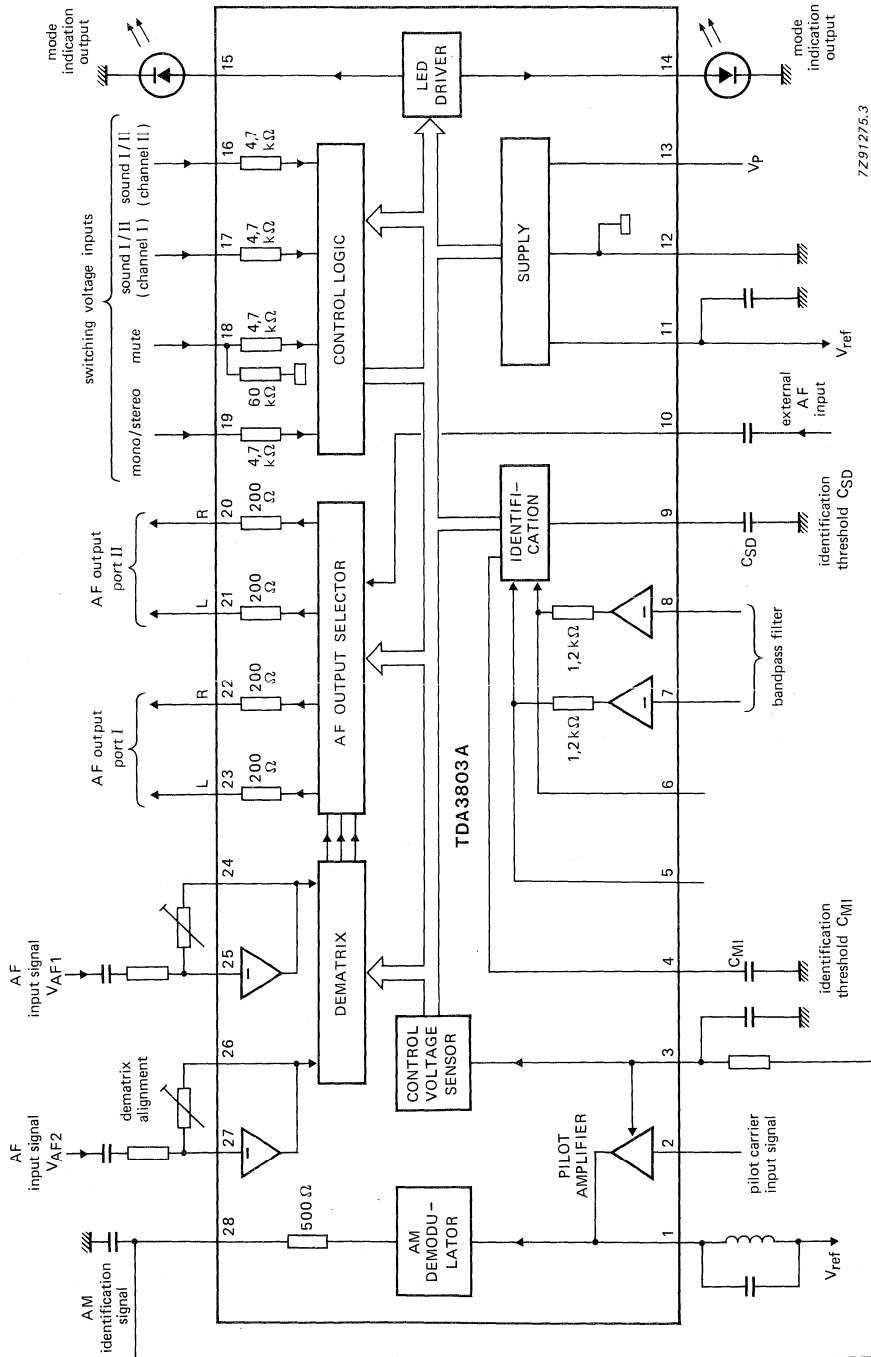


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 13)	$V_P = V_{13-12}$	max.	14 V
Voltages with respect to pin 12 (ground) pins 25; 27 and 28	$V_{25;27;28-12}$	max.	$V_P$
Voltages			
pin 1 to pin 10	$V_{n-12}$	max.	$V_P$
pin 14 to pin 19	$V_{n-12}$	max.	$V_P$
Currents			
pin 11	$I_{11}$	max.	3 mA
pins 20; 21; 22; 23	$I_{20;21;22;23}$	max.	10 mA
pin 28	$-I_{28}$	max.	3 mA
Total power dissipation	$P_{tot}$	max.	1,5 W
Storage temperature range	$T_{stg}$		-25 to +125 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

## CHARACTERISTICS

$V_P = 12\text{ V}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ ; overall voltage gain ( $G_V = 1$ ); ( $R_S = R_R$ ); measured in Fig. 2 with a 1 kHz signal. AF input  $AF2 = AF1 = 0,5\text{ V}$ , pilot carrier input signal  $V_{2-12(\text{rms})} = 16\text{ mV}$ ,  $m = 0,5$  and with adjusted de-matrix circuit; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 13)</b>					
Supply voltage range	$V_P = V_{13-12}$	10,8	12	13,2	V
Supply current (without LED current)	$I_P = I_{13}$	—	28	35	mA
Reference voltage (pin 11)	$V_{\text{ref}}$	—	6	—	V
Input resistance (dynamic)	$R_{11-12}$	—	4	—	k $\Omega$
<b>AF part</b>					
Amplification	$G_V$	-40	—	18	dB
Input signal at $G_V = 1$	$V_{AF1} = V_{AF2}$	—	—	1	V
Mono AF input signal (pin 10)*					
Input signal	$V_{10-12}$	—	—	2	V
DC input voltage level	$V_{10-12}$	—	6	—	V
Input resistance	$R_{10-12}$	—	16	—	k $\Omega$
Stereo mode					
AF output port I					
pin 22: right					
pin 23: left					
AF output port II					
pin 20: right					
pin 21: left					
Output signal (THD $\leq 0,5\%$ )					
port I ( $V_{23-12} = V_{22-12}$ )	$V_{oI}$	—	—	2	V
port II ( $V_{21-12} = V_{20-12}$ )	$V_{oII}$	—	—	2	V
Weighted signal-to-noise ratio of the AF signal switches (in accordance with CCIR468/2)					
	(S+N)/N	—	65	—	dB
Unweighted signal-to-noise					
	(S+N)/N	60	—	—	dB
Total harmonic distortion ( $V_{20; 21; 22; 23-12} = 0,5\text{ V}$ ; $G_V = 1$ )					
	THD	—	0,05	—	%
Crosstalk attenuation (selective)					
stereo mode ( $f_1 = 1\text{ kHz}$ ; $f_2 = 400\text{ Hz}$ )	$\alpha_S$	40	—	—	dB
dual sound mode ( $f = 250\text{ Hz}$ to $12,5\text{ kHz}$ )	$\alpha_{DS}$	60	—	—	dB

\* An input signal at pin 10 appears at pins 20 to 23 if the mute input (pin 18) is activated ( $V_{18-12} \geq 2\text{ V}$ ).

parameter	symbol	min.	typ.	max.	unit
DC input voltage level at pins 25 and 27	$V_{25;27-12}$	—	6	—	V
DC output voltage level at pins 20; 21; 22 and 23	$V_{n-12}$	—	6	—	V
Output resistance at pins 20; 21; 22 and 23	$V_{n-12}$	—	200	—	$\Omega$
<b>Identification part</b>					
Pilot carrier amplifier input signal (pin 2)	$V_{2-12}$	5	—	—	mV
gain control range	$\Delta G_V$	40	—	—	dB
controlled output signal (pin 1) (peak-to-peak value)	$V_{1-12(p-p)}$	—	300	—	mV
Input resistance (pin 2)	$R_{2-12}$	—	60	—	$k\Omega$
Output resistance (pin 1)	$R_{1-12}$	1	—	—	$M\Omega$
DC input voltage level (pin 2) applied externally (see Fig. 2)	$V_{2-12}$	—	6	—	V
DC output voltage level (pin 28) without gain control	$V_{28-12}$	—	6	—	V
with gain control	$V_{28-12}$	—	7,9	—	V
Identification signal (pin 28) (peak-to-peak value)	$V_{28-12(p-p)}$	—	2,0	—	V
Filter operational amplifiers open loop gain	$G_o$	78	—	—	dB
Identification frequency evaluation					
No identification signal (lower threshold)	$V_{4-12}$	—	—	2,5	V
Identification signal (upper threshold)	$V_{4-12}$	4,7	—	—	V
Stereo transmission (lower threshold)	$V_{9-12}$	—	—	2,5	V
Dual sound transmission (upper threshold)	$V_{9-12}$	4,7	—	—	V
<b>Control logic part</b>					
Mute input voltage (pin 18) mute OFF	$V_{18-12}$	—	—	0,8	V
mute ON (see the remarks to pin 10)	$V_{18-12}$	2	—	—	V
Switching stereo/mono and sound I/sound II					
Stereo transmission switching voltage to pin 19 (pin 17 and 16 not affected)					
output ports I and II mono	$V_{19-12}$	—	—	0,8	V
output ports I and II stereo	$V_{19-12}$	2	—	—	V

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Control logic part (continued)</b>					
Mono transmission both output ports I and II mono					
Dual sound transmission					
switching voltage to pin 16 (pin 19 and 17 not affected)					
output port II sound I	V <sub>16-12</sub>	2	—	—	V
output port II sound II	V <sub>16-12</sub>	—	—	0,8	V
switching voltage to pin 17 (pin 16 and 19 not affected)					
output port I sound I	V <sub>17-12</sub>	—	—	0,8	V
output port I sound II	V <sub>17-12</sub>	2	—	—	V
Mode indication (pins 14 and 15; see also Table 1)					
Output current	-I <sub>14; 15</sub>	9	12	15	mA
Output voltage (note 2)	V <sub>14; 15-12</sub>	0	—	8	V
Stereo/mono transmission: LED indication is valid for the transmission mode					
Dual sound transmission: LED indication is valid for port I					

Table 1 Mode indication (note 1)

transmission mode	LED pin 15	LED pin 14
mono	OFF	OFF
stereo:		
stereo selection; V <sub>19-12</sub> ≥ 2 V	ON	ON
mono selection; V <sub>19-12</sub> ≤ 0,8 V	ON	ON
dual sound:		
sound I selection; V <sub>17-12</sub> ≤ 0,8 V	ON	OFF
sound II selection; V <sub>17-12</sub> ≥ 2 V	OFF	ON

## Notes to the characteristics

- With mute (pin 18) ON both LEDs (pin 14 and 15) are switched OFF.
- Pin 14 and 15 are also suitable as output switches to control TDA3810.  
At LED OFF and I<sub>14, 15</sub> ≤ 100 μA, then V<sub>14, 15-12</sub> ≤ 200 mV.



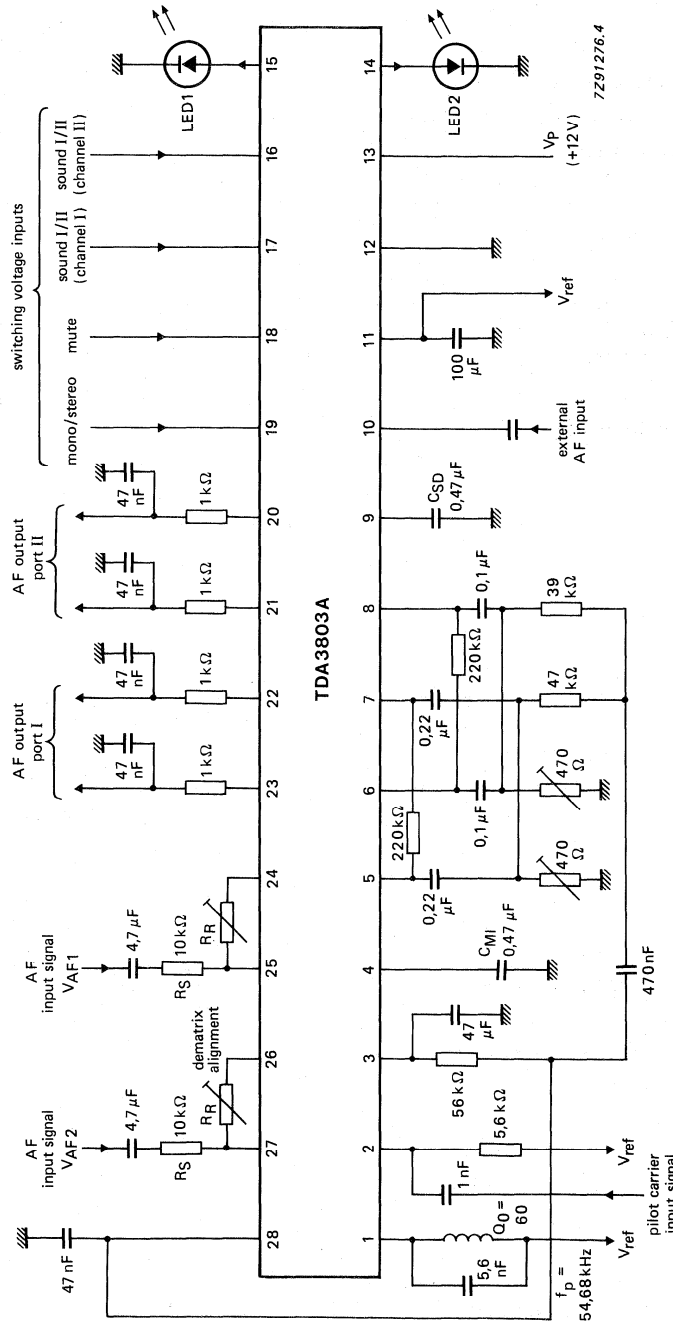


Fig. 2a Application diagram and test circuit; external components.

APPLICATION INFORMATION (continued)

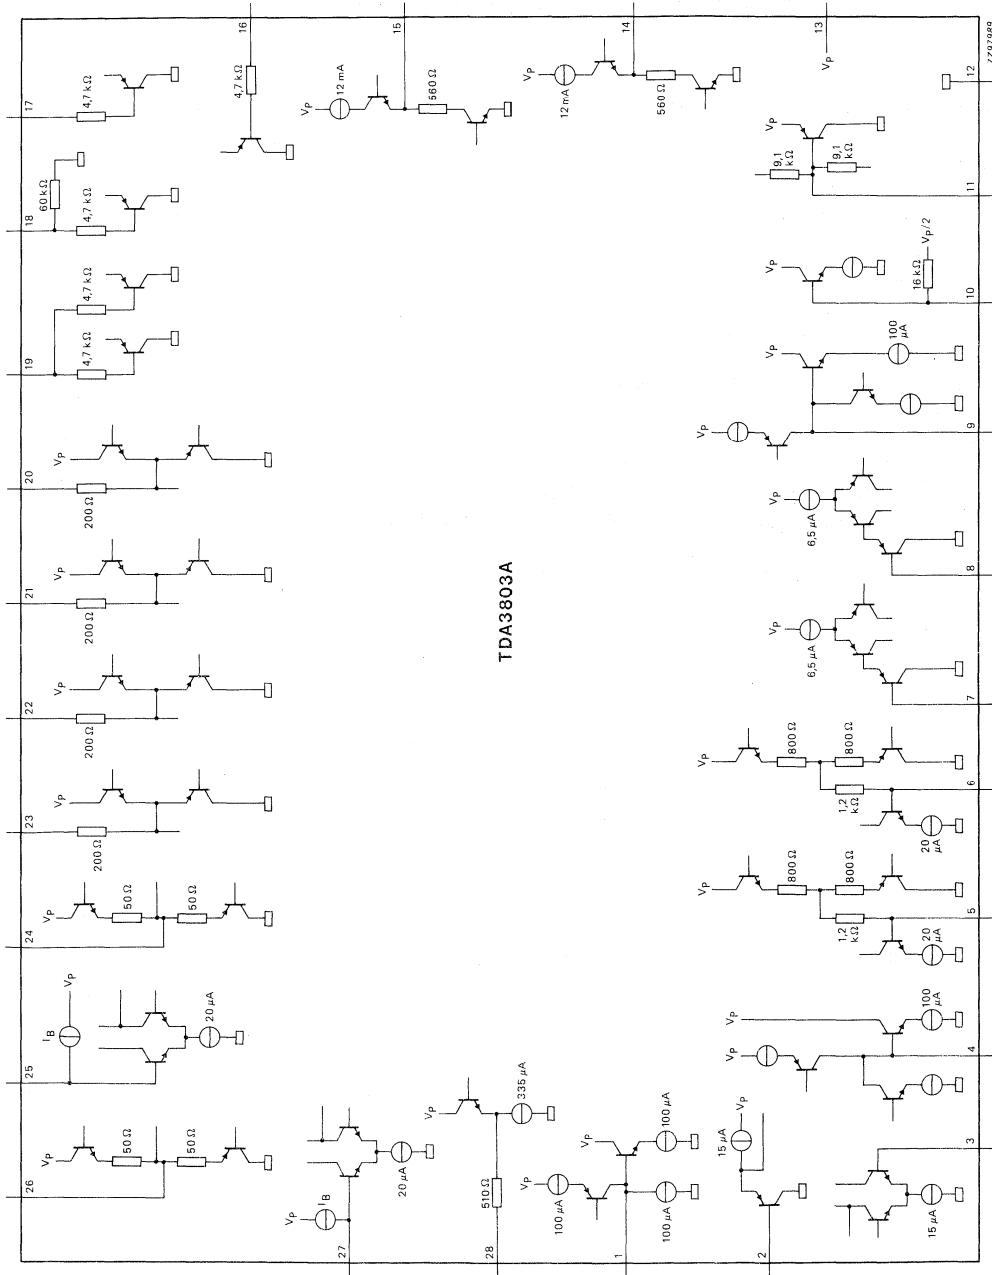


Fig. 2b Application diagram and test circuit; part of internal circuitry.

## MULTIPLEX PLL STEREO DECODER

The TDA3806 is a phase-locked loop (PLL) stereo decoder for decoding the stereo multiplex signal. The decoding signal is generated by a phase-locked loop system. Second audio program (SAP) and adjacent channel interference (ACI) are suppressed by the internal circuitry. The decoder has a main signal and a sub-signal output. It is possible to apply a separate noise reduction system to the sub-signal. Main signal and noise reduced sub-signal have to be combined at an external matrix to both L and R.

## Features

- Adjustable gain by external resistors (separate for main and sub-signal)
- D.C. input for smooth mono-stereo takeover control (without influencing the pilot indicator)
- Pilot dependent mono-stereo switch
- Pilot indicator driver
- PLL oscillator switch-off facility
- Buffered oscillator frequency measuring facility
- Internal suppression of Second Audio Program (SAP) distortion (5th harmonic of pilot)
- Suppression of Adjacent Channel Interference (ACI) distortion (3rd harmonic of sub carrier)
- Electronic hum filtering

## QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage range (pin 8)	$V_p$	7,5	12	15	V
Supply current at $V_p = 12$ V	$I_p$	15	22	30	mA
D.C. output voltage range	$V_{15, 16-7}$	1	—	11	V
A.C. output voltage (r.m.s. value)	$V_{15, 16-7}(\text{rms})$	—	1,25	—	
Voltage gain sub-signal	$V_{15}/V_{\text{sub}}$	—	13,5	—	dB
Voltage gain main signal	$V_{16}/V_{\text{main}}$	—	19,5	—	dB
Total harmonic distortion	THD	—	0,1	0,5	%
Operating ambient temperature range	$T_{\text{amb}}$	0	—	+70	°C
Storage temperature range	$T_{\text{stg}}$	-25	—	+150	°C

## PACKAGE OUTLINE

18-lead dual in-line; plastic (SOT-102H).

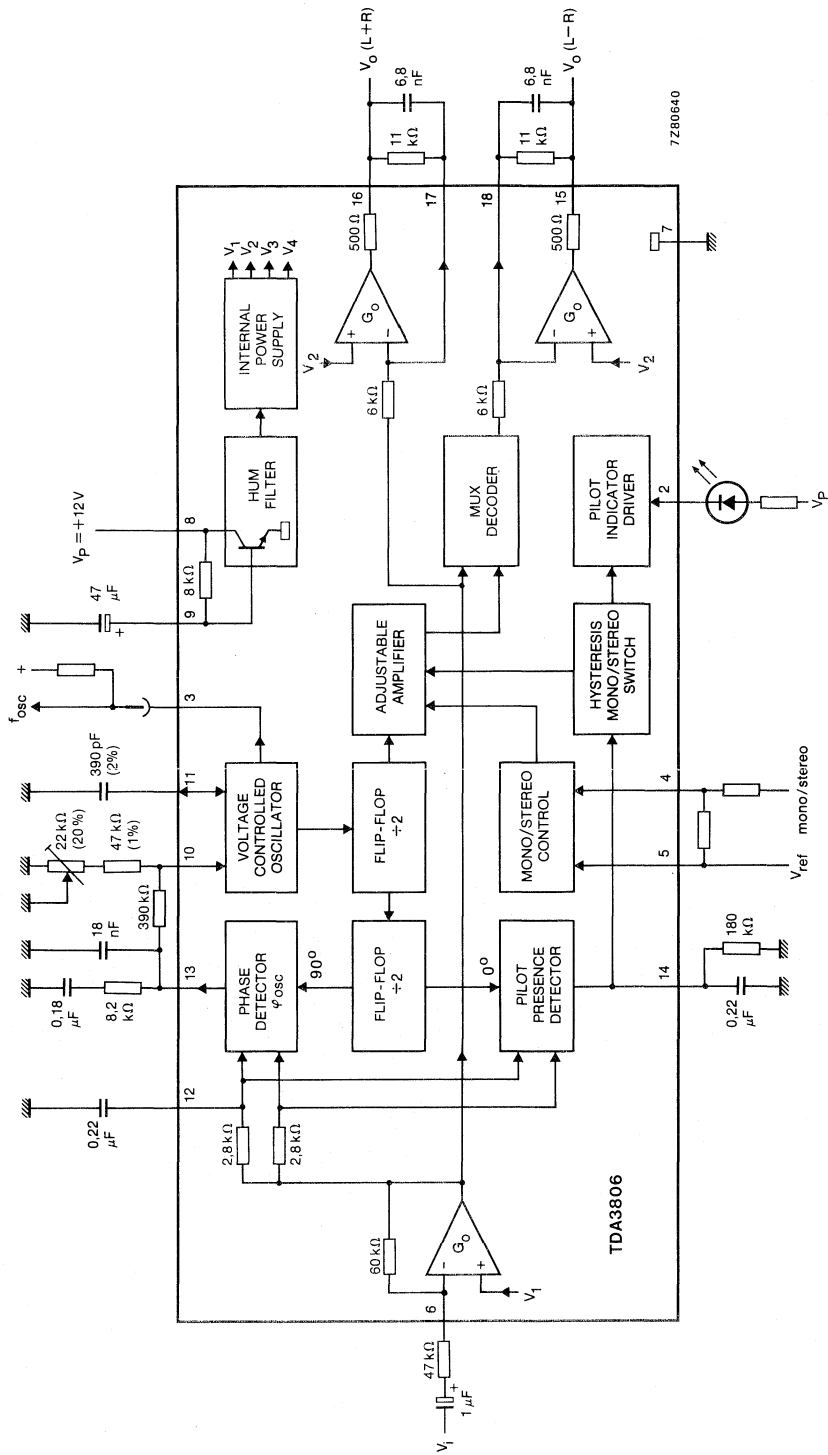


Fig. 1 Block diagram and test circuit.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	typ.	max.	unit
Supply voltage	V <sub>8-7</sub>	—	—	16	V
Input voltage (d.c.)	V <sub>4, 5-7</sub>	0	—	12	V
Input voltage osc. frequency	V <sub>3-7</sub>	0	—	V <sub>P</sub>	V
Indicator driver voltage	V <sub>2-7</sub>	—	—	16	V
Indicator driver output current	I <sub>2</sub>	—	—	20	mA
Total power dissipation at T <sub>amb</sub> = 25 °C (see Fig. 2)	P <sub>tot</sub>	—	—	1200	mW
Storage temperature	T <sub>stg</sub>	−25	—	+150	°C
Operating ambient temperature	T <sub>amb</sub>	0	—	+70	°C

**D.C. CHARACTERISTICS**

Supply voltage (V<sub>P</sub>) = 12 V; T<sub>amb</sub> = 25 °C; unless otherwise specified.  
See Fig. 1.

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage range V <sub>P</sub>	V <sub>8-7</sub>	7,5	12	15	V
Supply current without indicator current	I <sub>8</sub>	15	22	30	mA
Bias input voltage	V <sub>6-7</sub>	—	5	—	V
Bias voltage output stages	V <sub>17, 18-7</sub>	—	6,7	—	V
Offset current via ext. feedback resistors	I <sub>17-16</sub> I <sub>18-15</sub>	—	30	—	μA
Output voltage range	V <sub>15, 16-7</sub>	1	—	V <sub>P</sub> −1	V
Oscillator frequency voltage range	V <sub>3-7</sub>	0	—	12	V
Voltage range M/St control	V <sub>4-7</sub>	0	—	4	V
Reference voltage	V <sub>5-7</sub>	0	—	4	V
Saturation voltage pilot indicator; I <sub>2</sub> = 20 mA	V <sub>2-7(sat)</sub>	—	0,5	—	V

**A.C. CHARACTERISTICS**

Multiplex input voltage V<sub>6-7(p-p)</sub> = 0,85 V inclusive 9 % pilot  
(m = 100 % ≙ Δf = ±55 kHz, f<sub>mod</sub> = 1 kHz), circuit as Fig. 1, unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
Input impedance (to be selected)	R <sub>i</sub>	—	47	—	kΩ
Output current	±I <sub>15,16</sub>	—	4	—	mA
Output voltage (r.m.s. value)	V <sub>15, 16-7(rms)</sub>	—	1,25	—	V
Voltage gain sub-signal sub-signal	V <sub>out15</sub> /V <sub>sub</sub>	—	13,5	—	dB
main signal	V <sub>out16</sub> /V <sub>main</sub>	—	19,5	—	dB

parameter	symbol	min.	typ.	max.	unit
Difference of gain	$G_{16}/G_{15}$	5	6	7	dB
Total harmonic distortion $V_{15}, 16-7 = 1,25 V$	THD	—	0,1	0,5	%
<b>Electronic hum filter</b>					
Ripple rejection $V_P$ ripple(rms) = 200 mV $f = 100$ Hz	RR	32	35	—	dB
Carrier suppression $V_O = 1,25 V$					
pilot suppression					
1st harmonic	$\alpha 1$	30	32	—	dB
2nd harmonic	$\alpha 2$	40	50	—	dB
3rd harmonic	$\alpha 3$	—	45	—	dB
4th harmonic	$\alpha 4$	—	55	—	dB
Suppression of frequencies generated by interference					
SAP suppression	$\alpha$ SAP	60	75	—	dB
Unweighted output noise voltage r.m.s. value, $b = 20$ Hz to 16 kHz	$V_N(15)$ $V_N(16)$	—	30 50	—	$\mu V$ $\mu V$
Weighted output noise voltage according to CCIR 468; peak value	$V_N(15)$ $V_N(16)$	—	90 150	—	$\mu V$ $\mu V$
<b>Voltage controlled oscillator (VCO)</b>					
Nominal frequency *	$f_{osc}$	—	63,4	—	kHz
Capture range	$\pm \Delta f/f$	2	—	—	%
Temperature coefficient	$\pm TK_{osc}$	—	1	—	$10^{-4}/K$
<b>Mono-stereo switch</b>					
Pilot threshold "stereo on" voltage (peak-to-peak)	$V_{pilot on}$	—	—	50	mV
Pilot threshold "stereo off" voltage (peak-to-peak)	$V_{pilot off}$	8	—	—	mV
Hysteresis	$\alpha$	—	2,5	—	dB

\* The oscillator frequency can be measured at pin 3 (low impedance output), when a resistor of 10 k $\Omega$  is switched from pin 3 to the supply voltage ( $V_{3-7} > 6 V$ ).

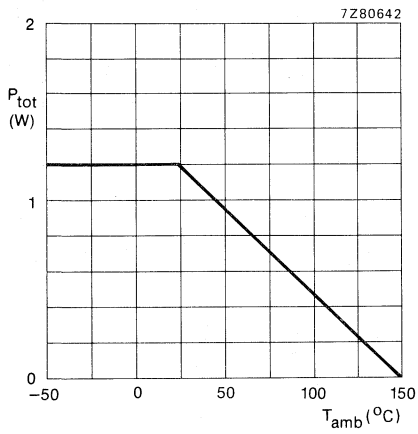


Fig. 2 Power derating curve.

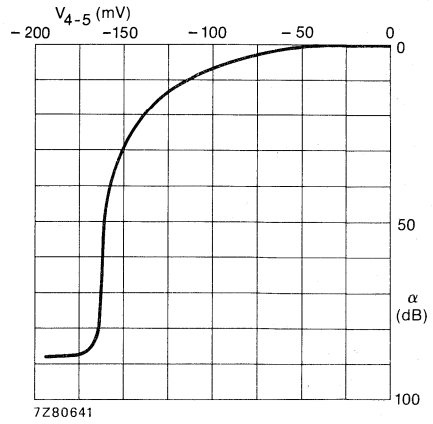


Fig. 3 Sub-signal attenuation as a function of the control voltage ( $V_{4.5}$ ).

DEVELOPMENT DATA





# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA3808

## SECOND AUDIO PROGRAMME (SAP) SIGNAL PROCESSOR

### GENERAL DESCRIPTION

The circuit provides amplification, limiting, demodulation, indication and "no-signal" muting for processing the SAP facility of the multi-channel television sound system.

The main selectivity is done by a four pole bandpass filter in front of the integrated circuit.

### Features

- Selective amplifier
- Limiter
- Phase demodulator
- Level detector

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 4)	$V_p$	1,8	—	6,0	V
Supply current at $V_p = 4,5$ V	$I_p$	—	7	—	mA
Signal handling (e.m.f.)	$V_i$	—	200	—	mV
A.F. output voltage	$V_o$	—	160	—	mV

### PACKAGE OUTLINE

16-lead dual in-line; plastic (SOT-38).

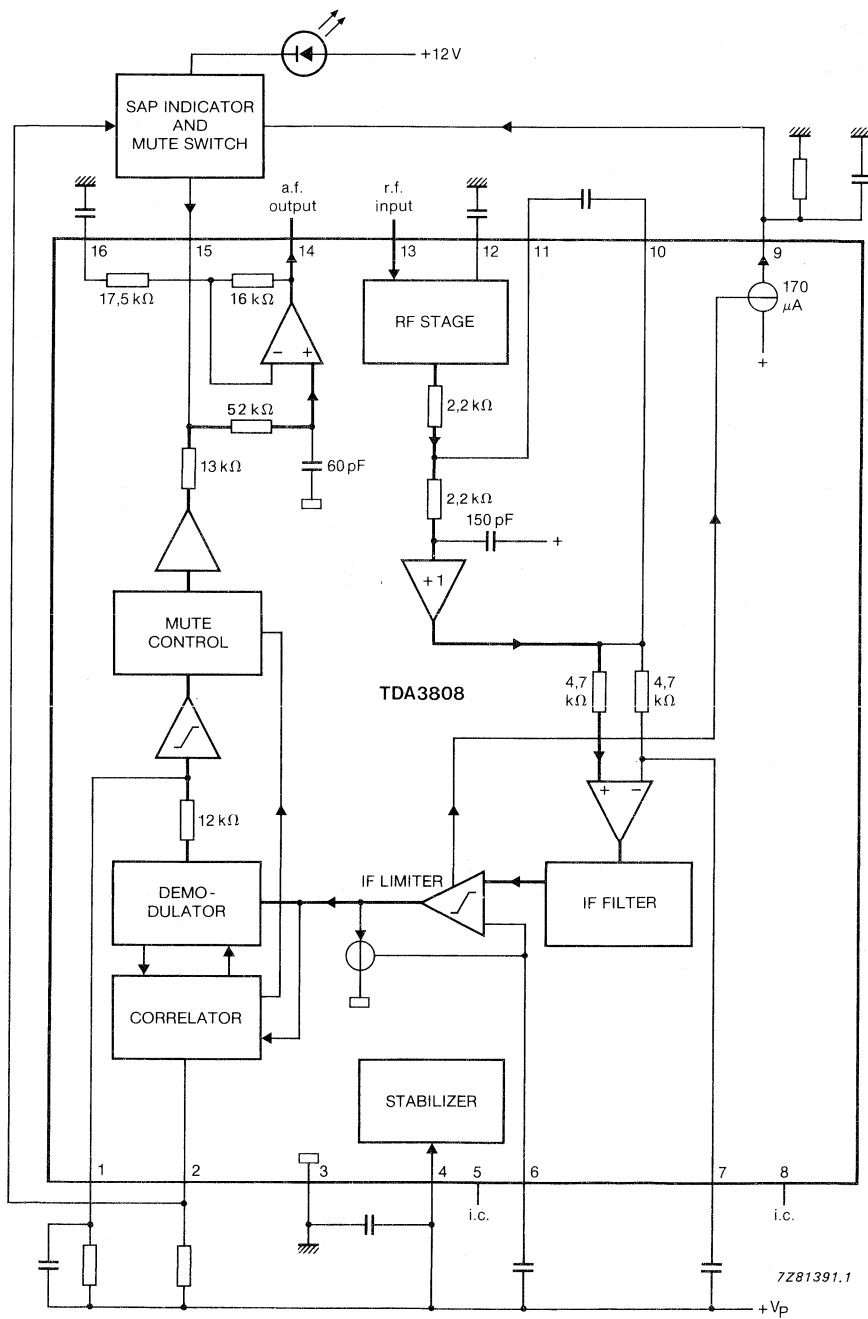


Fig. 1 Block diagram.

Pins 5 and 8 are internally connected and no external loading is permitted.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 4)	$V_p$	—	—	7	V
Storage temperature	$T_{stg}$	-55	—	+ 150	°C
Operating ambient temperature range	$T_{amb}$	0	—	+ 70	°C

**THERMAL RESISTANCE**from crystal to ambient  $R_{th\ c-a}$  — 75 — K/W**D.C. CHARACTERISTICS** $V_p = 4,5\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; measured in Fig. 2 unless otherwise specified


parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 4)	$V_p$	1,8	—	6	V
Supply current $V_p = 3\text{ V}$	$I_p$	—	6,3	—	mA
R.F. input voltage	$V_{13-3}$	—	0,9	—	V
Output voltage	$V_{14-3}$	—	1,3	—	V
Output current maximum d.c. load	$I_{14}$	-100	—	+ 100	$\mu\text{A}$
maximum a.c. load	$I_{14}$	-3	—	+ 3	mA

DEVELOPMENT DATA

**A.C. CHARACTERISTICS** $V_p = 4,5\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; measured in Fig. 4;  $f_{rf} = 78,67\text{ kHz}$  modulated with  $\Delta f = \pm 10\text{ kHz}$ ;  $f_m = 0,4\text{ kHz}$ ;  $V_i = 4\text{ mV}$  (e.m.f. at a source impedance of  $75\ \Omega$ ); r.m.s. noise voltage measured unweighted in the range  $f = 300\text{ Hz}$  to  $20\text{ kHz}$ ; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
Input voltage for indication start ( $f_{rf} = 78,67\text{ kHz}$ )	$V_i$	—	320	—	$\mu\text{V}$
A.F. output voltage	$V_o = V_{14-3}$	—	160	—	mV
Signal to noise ratio	$S/(S+N)$	—	60	—	dB
AM suppression	$\alpha$	—	56	—	dB
Total harmonic distortion	THD	—	1,1	—	%
A.F. bandwidth	B	—	9	—	kHz
Noise level $V_{ref} = 4\text{ mV}$ ; $V_i < 1\ \mu\text{V}$	N	—	58	—	dB

# TDA3808

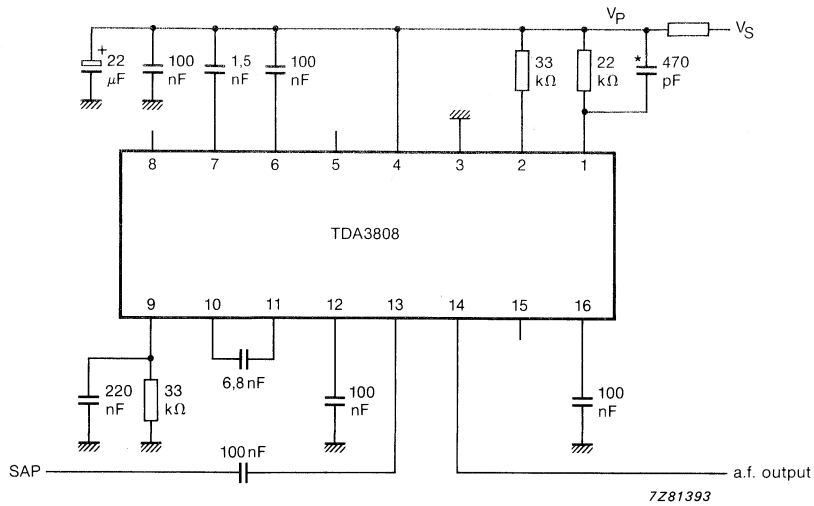

\* 6,8 nF for 75 μs de-emphasis

Fig. 2 Test circuit.

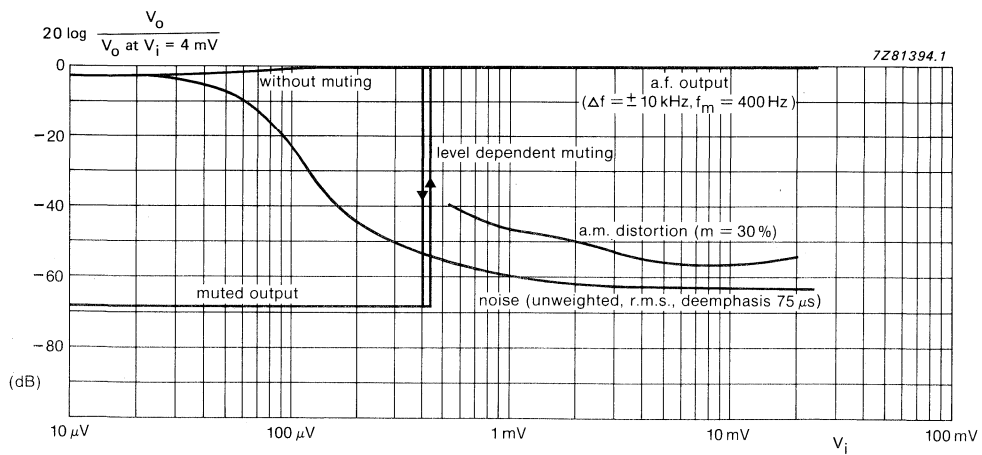


Fig. 3 Signal performance of TDA3808.

DEVELOPMENT DATA

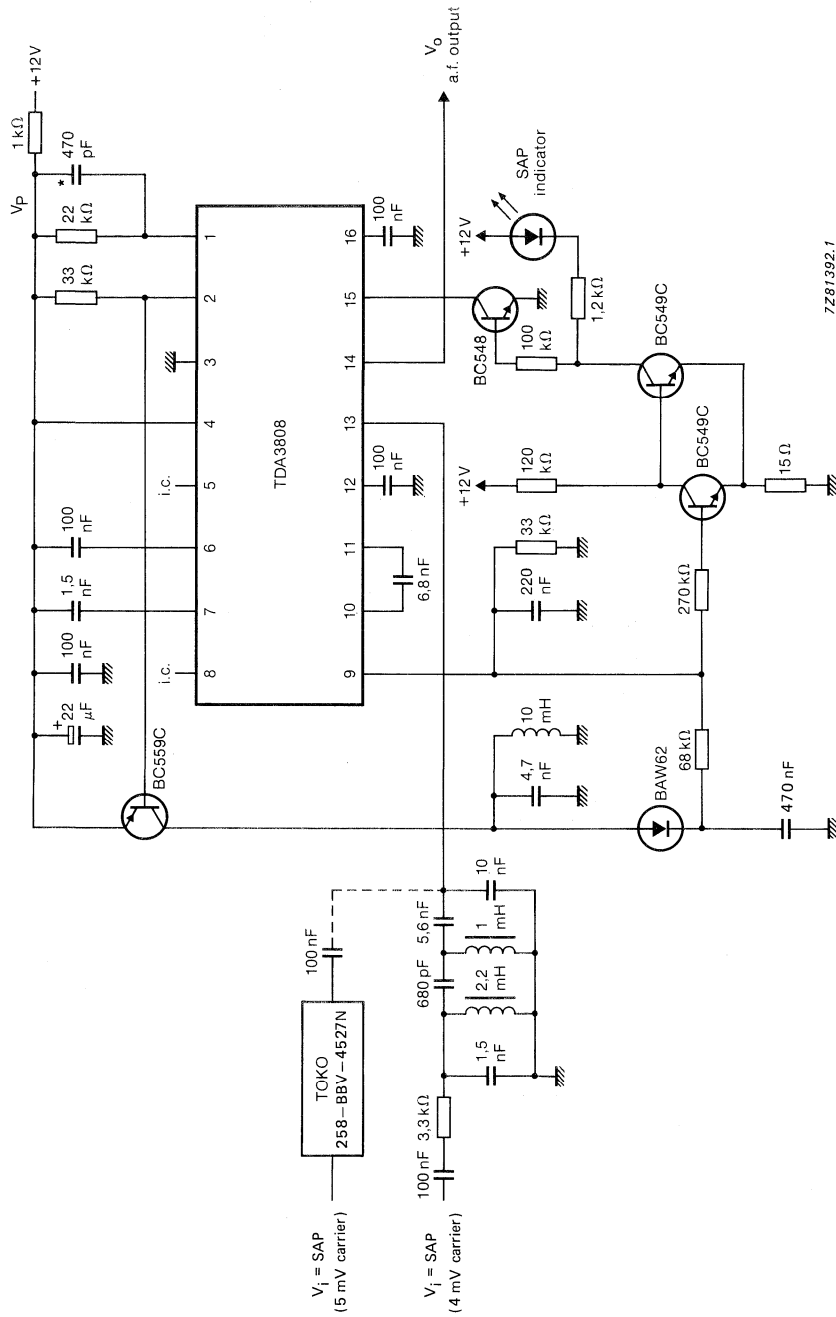


Fig. 4 Application diagram.

\* 6,8 nF for 75 μs de-emphasis



## SPATIAL, STEREO AND PSEUDO-STEREO SOUND CIRCUIT

The TDA3810 integrated circuit provides spatial, stereo and pseudo-stereo sound for radio and television equipment.

### Features


- Three switched functions: spatial (widened stereo image)  
stereo  
pseudo-stereo (artificial stereo from a mono source)
- Offset compensated operational amplifiers to reduce switch noise
- LED driver outputs to facilitate indication of selected operating mode
- Start/stop circuit to reduce switch noise and to prevent LED-flicker
- TTL-compatible control inputs

### QUICK REFERENCE DATA

Supply voltage (pin 18)	$V_P$	typ.	12 V
Supply current (LEDs off)	$I_P$	typ.	6 mA
Operating ambient temperature range	$T_{amb}$	0 to	+ 70 °C
Input signal (r.m.s. value)	$V_{i(rms)}$	<	2 V
Total harmonic distortion (stereo)	THD	typ.	0,1 %
Channel separation (stereo)	$\alpha$	typ.	70 dB
Gain (stereo)	$G_V$	typ.	0 dB

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

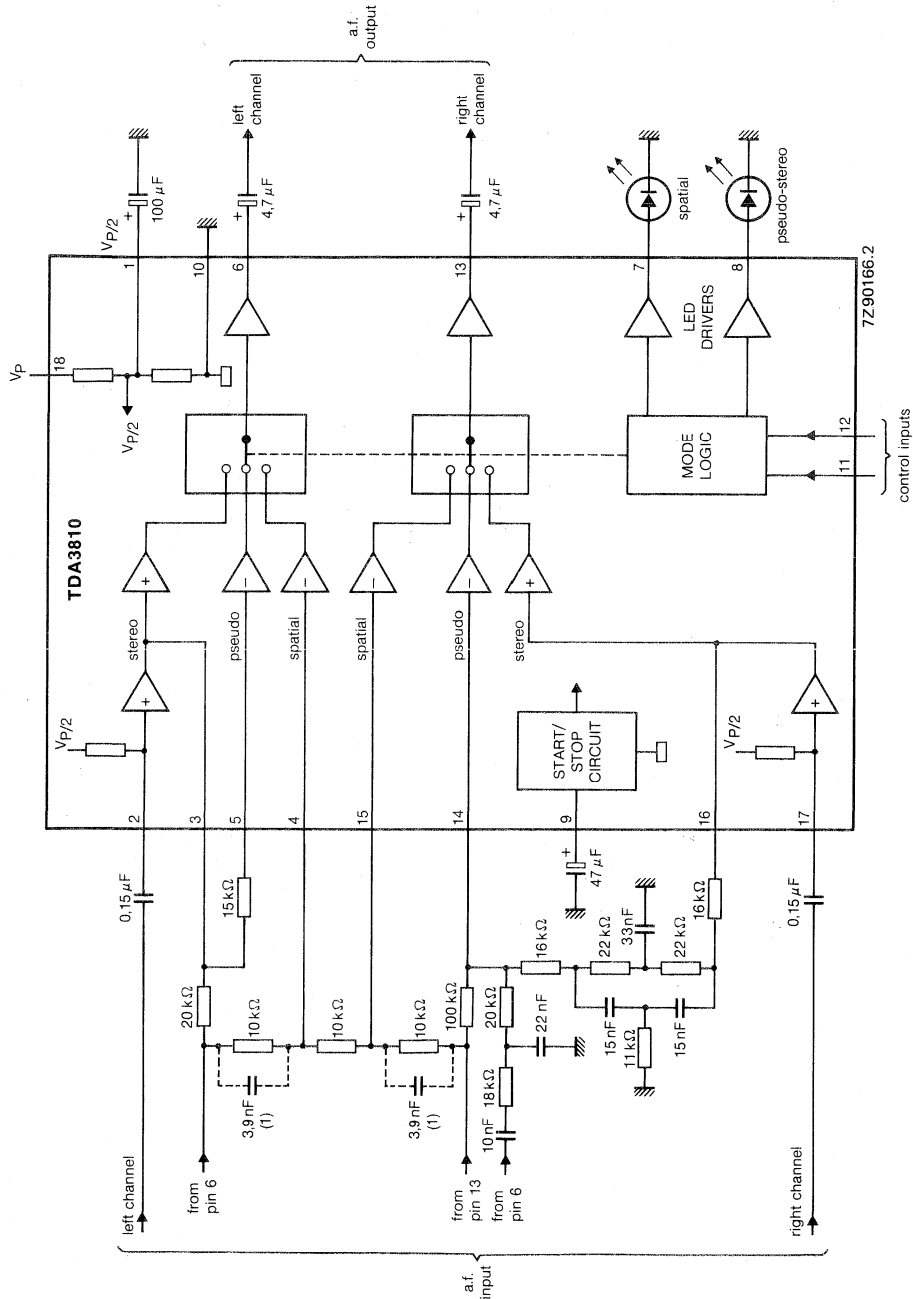

(1) Used in spatial mode for correction of high frequency only (optimal performance).

Fig. 1 Block diagram/test circuit showing external components; for control inputs to pins 11 and 12 see truth table.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 18)	$V_P$	max.	18 V
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		0 to + 70 °C

**THERMAL RESISTANCE**

From crystal to ambient	$R_{th\ cr-a}$	=	80 K/W
-------------------------	----------------	---	--------

**CHARACTERISTICS**

$V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; test circuit Fig. 1 stereo mode (pin 11 to ground) unless otherwise specified. Output load:  $R_{6-10, 13-10} \geq 4,7\text{ k}\Omega$ ;  $C_{6-10, 13-10} \leq 150\text{ pF}$ .

parameter	symbol	min.	typ.	max.	unit
Supply voltage range (pin 18)	$V_P$	4,5	—	16,5	V
Supply current	$I_P$	—	6	12	mA
Reference voltage	$V_S$	5,3	6	6,7	V
Input voltage (pin 2 or 17) THD = 0,2% (stereo mode)	$V_{i(rms)}$	—	—	2	V
Input resistance (pin 2 or 17)	$R_i$	50	75	—	k $\Omega$
Voltage gain $V_O/V_i$	$G_V$	—	0	—	dB
Channel separation (R/L)	$\alpha$	60	70	—	dB
Total harmonic distortion $f = 40\text{ to }16\,000\text{ Hz}$ ; $V_{O(rms)} = 1\text{ V}$	THD	—	0,1	—	%
Power supply ripple rejection	RR	—	50	—	dB
Noise output voltage (unweighted) left and right output	$V_{n(rms)}$	—	10	—	$\mu\text{V}$
<b>SPATIAL MODE</b> (pins 11 and 12 HIGH)					
Antiphase crosstalk	$\alpha$	—	50	—	%
Voltage gain	$G_V$	1,4	2,4	3,4	dB

**PSEUDO-STEREO MODE**

The quality and strength of the pseudo-stereo effect is determined by external filter components.

parameter	symbol	min.	typ.	max.	unit
<i>CONTROL INPUTS</i> (pins 11 and 12)					
Input resistance	$R_i$	70	120	—	$k\Omega$
Switching current	$-I_i$	—	35	100	$\mu A$
<i>LED DRIVERS</i> (pins 7 and 8)					
Output current for LED	$-I_o$	10	12	15	mA
Forward voltage	$V_F$	—	—	6	V

Truth table

mode	control input state		LED spatial pin 7	LED pseudo pin 8
	pin 11	pin 12		
Mono pseudo-stereo	HIGH	LOW	off	on
Spatial stereo	HIGH	HIGH	on	off
Stereo	LOW	X	off	off

LOW = 0 to 0,8 V (the less positive voltage)

HIGH = 2 V to 5,5 V (the more positive voltage)

X = don't care

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4301

## VERTICAL DRIVER

### GENERAL DESCRIPTION

This monolithic integrated circuit is an inverting buffer between the pulse pattern generator SAA1008 (LOCMOS technology) and the image sensors NXA1010 to NXA1040.

The circuit consists of four drivers either for all vertical transfer clocks for image part (1A to 4A), or all vertical transfer clocks for storage part (1B to 4B) electrodes, and one driver for a transfer gate (TG) electrode.

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage range (pin 13)	$V_{13-16}$	4,5	5,0	5,5	V
Supply voltage range (pin 1)	$V_{1-16}$	11,00	11,25	11,50	V
Supply current at $V_p = 5$ V	$I_{13}$	—	14	—	mA
Operating current $V_{1-16} = 11,25$ V	$I_1$	—	9,25	—	mA
Storage temperature	$T_{stg}$	-25	—	+ 150	°C
Operating ambient temperature	$T_{amb}$	-20	—	+ 70	°C

### PACKAGE OUTLINE

16-lead dual in-line; plastic (SOT-38).

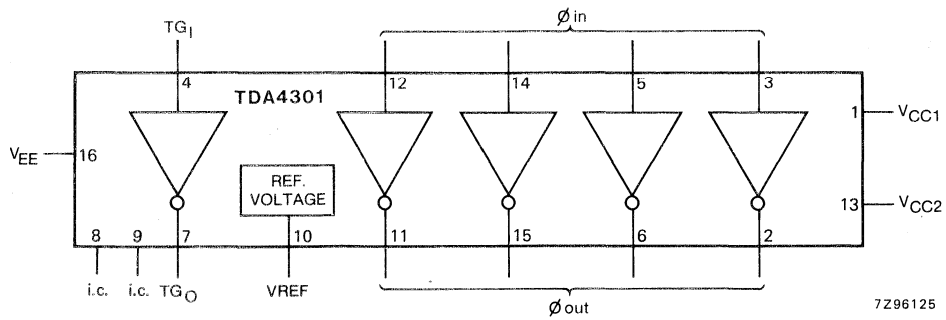


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 1)	$V_{CC1}$	—	—	+ 12	V
Supply voltage (pin 13)	$V_{CC2}$	—	—	+ 12	V
D.C. output currents					
pins 2, 6, 11 and 15; $t < 1$ s	$I_O$	—	—	250	mA
pin 7; $t < 1$ s	$I_{TGO}$	—	—	10	mA
Total power dissipation	$P_{tot}$	—	—	550	mW
Operating ambient temperature	$T_{amb}$	-20	—	+ 70	°C
Storage temperature	$T_{stg}$	-25	—	+ 150	°C

**D.C. CHARACTERISTICS**

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 13)	$V_{CC2}$	4,5	5,0	5,5	V
Supply voltage (pin 1)	$V_{CC1}$	11,00	11,25	11,50	V
Reference voltage (pin 10)	$V_{ref}$	3,60	3,75	3,90	V
Supply current (pin 13)	$I_{CC2}$	—	14,0	—	mA
Operating current (pin 1)	$I_{CC1}$	—	9,25	—	mA

## A.C. CHARACTERISTICS

 $V_{CC1} = V_{1-16} = 11,25 \text{ V}; V_{CC2} = V_{13-16} = 5,0 \text{ V}; T_{amb} = 25 \text{ }^\circ\text{C}$ 

parameter	symbol	min.	typ.	max.	unit
<b>Inputs <math>\phi</math> and TGI (pins 3, 5, 4, 12 and 14)</b>					
Input voltage range	$V_\phi$	0	—	5	V
Input threshold voltage	$V_{\phi TH}$	0,9	1,1	1,3	V
Input current ( $V_\phi = 5 \text{ V}$ )	$I_\phi$	—	10,0	30,0	$\mu\text{A}$
<b>Outputs <math>\phi</math> (pins 2, 6, 15 and 11)</b>					
Load $C_L = 2000 \text{ pF}$					
Output voltage swing	$V_\phi \text{ (p-p)}$	—	10,0	—	V
Timing (Fig. 2)					
delay neg. slope	$t_{d1}$	—	—	100	ns
negative slope (fall time)	$t_{d5}$	50	70	90	ns
delay pos. slope	$t_{d3}$	—	—	100	ns
positive slope (rise time)	$t_{d6}$	30	50	70	ns
<b>Output TG (pin 7)</b>					
Load $C_L = 68 \text{ pF}$					
Output voltage swing	$V_{TGO} \text{ (p-p)}$	—	10,0	—	V
Timing (Fig. 2)					
delay neg. slope	$t_{d1}$	—	—	100	ns
negative slope (fall time)	$t_{d5}$	70	100	120	ns
delay pos. slope	$t_{d3}$	—	—	100	ns
positive slope (rise time)	$t_{d6}$	50	70	90	ns

DEVELOPMENT DATA

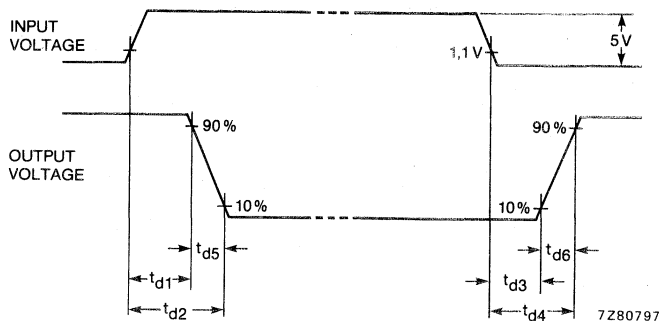


Fig. 2 Timing diagram.

Load output ( $\phi_{OUT}$ ) capacitor  $C_L = 2000 \text{ pF}$ ; output  $TG_O$  load  $C_L = 68 \text{ pF}$ . At the specified load only one switching may be done at a time.

APPLICATION INFORMATION

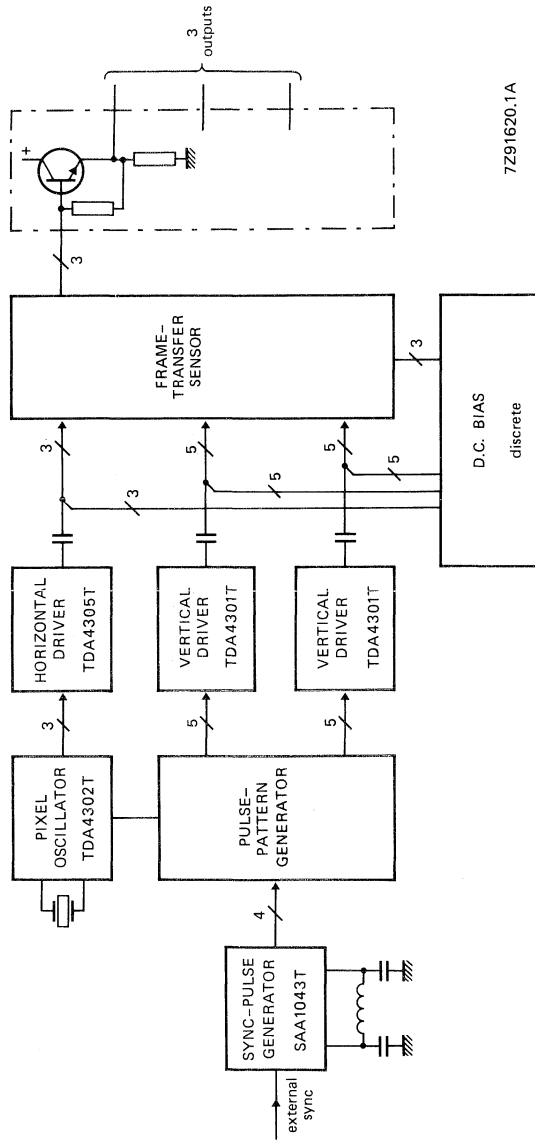


Fig. 3 Control circuitry for driving the NXA1010 to NXA1040 frame-transfer sensors.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4301T

## VERTICAL DRIVER

### GENERAL DESCRIPTION

This monolithic integrated circuit is an inverting buffer between the pulse pattern generator SAA1008 (LOCMOS technology) and the image sensors NXA1010 to NXA1040.

The circuit consists of four drivers either for all vertical transfer clocks for image part (1A to 4A), or all vertical transfer clocks for storage part (1B to 4B) electrodes, and one driver for a transfer gate (TG) electrode.

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage range (pin 11)	$V_{11-14}$	4,5	5,0	5,5	V
Supply voltage range (pin 1)	$V_{1-14}$	11,00	11,25	11,50	V
Supply current at $V_p = 5$ V	$I_{11}$	—	14	—	mA
Operating current $V_{1-14} = 11,25$ V	$I_1$	—	9,25	—	mA
Storage temperature	$T_{stg}$	-25	—	+ 150	°C
Operating ambient temperature	$T_{amb}$	-20	—	+ 70	°C

### PACKAGE OUTLINE

TDA4301T: 14-lead mini-pack; plastic (SO-14; SOT-108A).

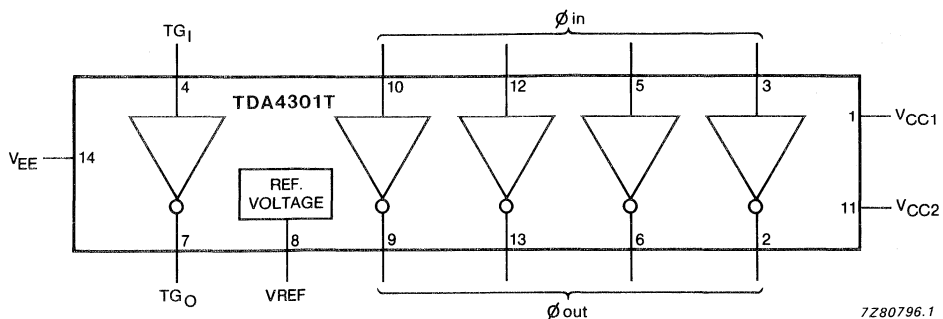


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 1)	$V_{CC1}$	—	—	+ 12	V
Supply voltage (pin 11)	$V_{CC2}$	—	—	+ 12	V
D.C. output currents					
pins 2, 6, 9 and 13; $t < 1$ s	$I_O$	—	—	250	mA
pin 7; $t < 1$ s	$I_{TGO}$	—	—	10	mA
Total power dissipation	$P_{tot}$	—	—	550	mW
Operating ambient temperature	$T_{amb}$	-20	—	+ 70	°C
Storage temperature	$T_{stg}$	-25	—	+ 150	°C

**D.C. CHARACTERISTICS**

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 11)	$V_{CC2}$	4,5	5,0	5,5	V
Supply voltage (pin 1)	$V_{CC1}$	11,00	11,25	11,50	V
Reference voltage (pin 8)	$V_{ref}$	3,60	3,75	3,90	V
Supply current (pin 11)	$I_{CC2}$	—	14,0	—	mA
Operating current (pin 1)	$I_{CC1}$	—	9,25	—	mA



## A.C. CHARACTERISTICS

 $V_{CC1} = V_{1-14} = 11,25 \text{ V}; V_{CC2} = V_{11-14} = 5,0 \text{ V}; T_{amb} = 25 \text{ }^\circ\text{C}$ 

parameter	symbol	min.	typ.	max.	unit
<b>Inputs <math>\phi</math> and TGI (pins 3, 5, 4, 10 and 12)</b>					
Input voltage range	$V_\phi$	0	—	5	V
Input threshold voltage	$V_{\phi TH}$	0,9	1,1	1,3	V
Input current ( $V_\phi = 5 \text{ V}$ )	$I_\phi$	—	10,0	30,0	$\mu\text{A}$
<b>Outputs <math>\phi</math> (pins 2, 6, 13 and 9)</b>					
Load $C_L = 2000 \text{ pF}$					
Output voltage swing	$V_\phi (\text{p-p})$	—	10,0	—	V
Timing (Fig. 2)					
delay neg. slope	$t_{d1}$	—	—	100	ns
negative slope (fall time)	$t_{d5}$	50	70	90	ns
delay pos. slope	$t_{d3}$	—	—	100	ns
positive slope (rise time)	$t_{d6}$	30	50	70	ns
<b>Output TG (pin 7)</b>					
Load $C_L = 68 \text{ pF}$					
Output voltage swing	$V_{TGO} (\text{p-p})$	—	10,0	—	V
Timing (Fig. 2)					
delay neg. slope	$t_{d1}$	—	—	100	ns
negative slope (fall time)	$t_{d5}$	70	100	120	ns
delay pos. slope	$t_{d3}$	—	—	100	ns
positive slope (rise time)	$t_{d6}$	50	70	90	ns

DEVELOPMENT DATA

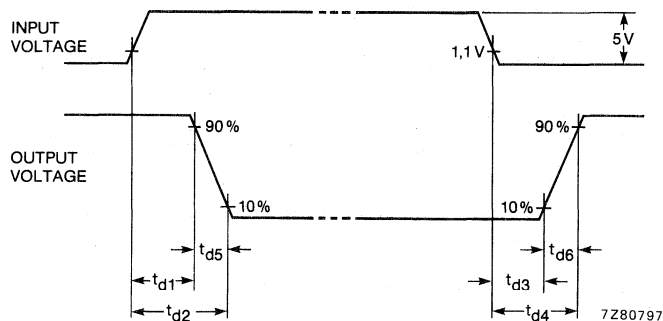


Fig. 2 Timing diagram.

Load output ( $\phi_{out}$ ) capacitor  $C_L = 2000 \text{ pF}$ ; output  $TG_O$  load  $C_L = 68 \text{ pF}$ . At the specified load only one switching may be done at a time.

APPLICATION INFORMATION

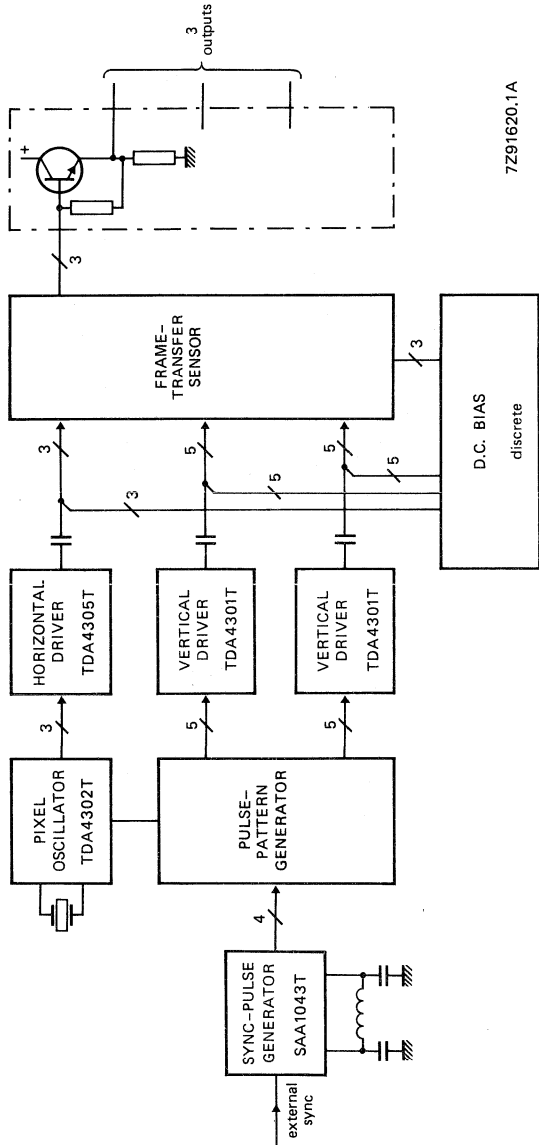


Fig. 3 Control circuitry for driving the NXA frame-transfer sensors.

## PIXEL GENERATOR

## GENERAL DESCRIPTION

The TDA4302 is a monolithic integrated circuit that generates the pulses for the read out registers of the NXA1010/1040 image sensors. The device operates in conjunction with the horizontal driver IC (TDA4305; TDA4305T).

## Features

- Start/Stop RC oscillator with high accuracy over a wide temperature range
- Frequency doubler for maximum sensor drive symmetry
- Synchronous divide by 6 counter that generates the three-phase signals for the horizontal drivers
- Stop/Start oscillator controller which also selects the  $\phi C'$  inputs or the divide by 6 counter outputs
- Voltage reference circuit

## QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 1)	$V_P = V_{1-3}$	4,5	4,0	5,5	V
Supply current (pin 1)	$I_P$	—	50	—	mA
Storage temperature range	$T_{stg}$	−25	—	+ 150	°C
Operating ambient temperature range	$T_{amb}$	−20	—	+ 70	°C

## PACKAGE OUTLINES

TDA4302 : 16-lead DIL; plastic with internal heat spreader (SOT-38).

TDA4302T: 16-lead mini-pack; plastic (SO-16L; SOT-162A).

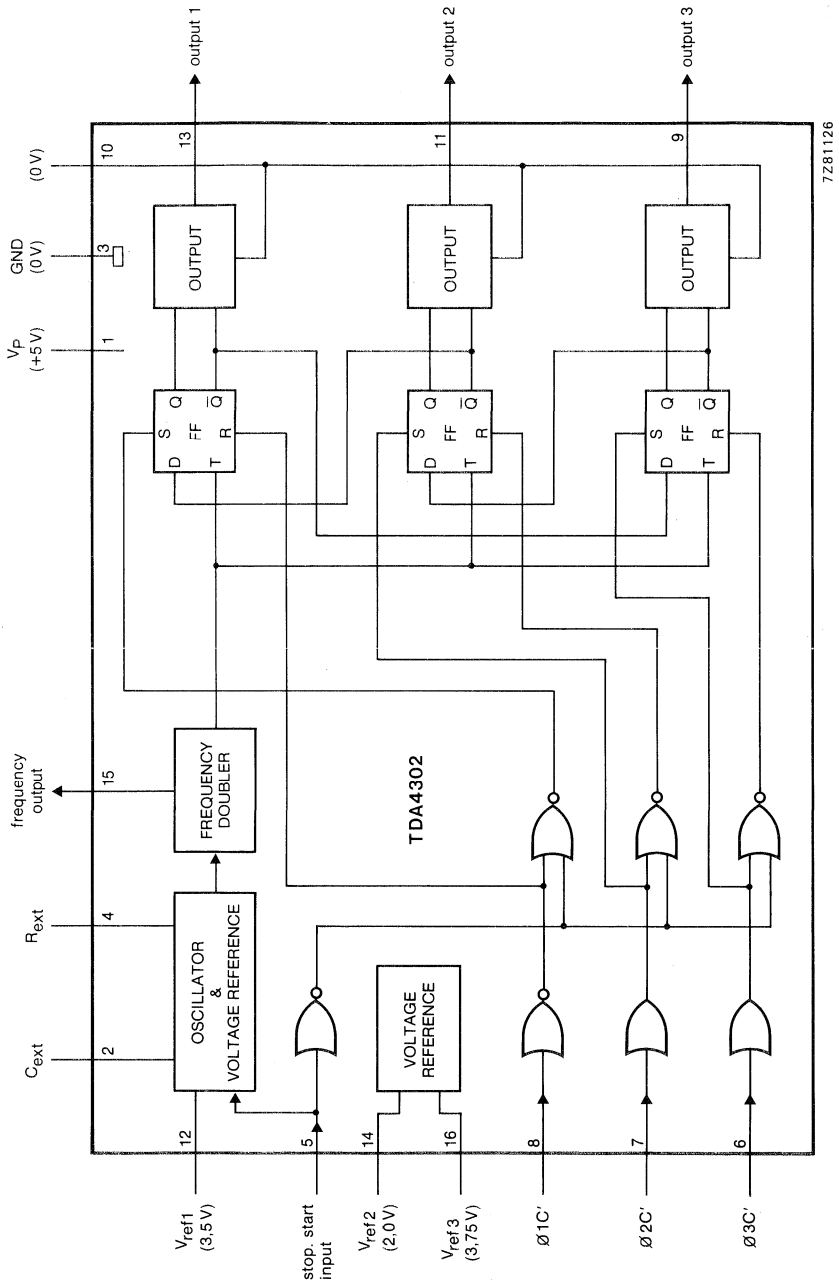


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 1)	$V_p$	max.	12 V
Input voltage (pins 2, 4, 5, 6, 7 and 8)	$V_i$	max.	$V_p$ V
Short-circuit current (d.c.) max. 1 s			
pin 2	$I_2$	max.	10 mA
pin 12	$I_{12}$	max.	100 mA
Total power dissipation			
SO package*	$P_{tot}$	max.	340 mW
DIL package	$P_{tot}$	max.	1000 mW
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-20 to + 70 °C

DEVELOPMENT DATA

\* Mounted on p.c.b.

## CHARACTERISTICS

$V_P = V_{1-3} = 5\text{ V}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ ; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage (pin 1)	$V_P$	4,5	5	5,5	V
Supply current (pin 1)	$I_P$	—	50	—	mA
<b>Reference voltages</b>					
3,5 V reference voltage (pin 12)*	$V_{\text{ref1}}$	3,35	—	3,65	V
2,0 V reference voltage (pin 14)	$V_{\text{ref2}}$	1,9	2,0	2,1	V
3,75 V reference voltage (pin 16)	$V_{\text{ref3}}$	3,6	3,75	3,9	V
Source current (pins 2 and 15)	$I_{2, 15}$	—	—	5	mA
<b>Oscillator</b>					
$(C_{\text{ext}} = 100\text{ pF}; R_{\text{ext}} = 450\text{ }\Omega)$					
Stop.Start/HIGH: stop condition					
Stop.Start/LOW: run condition					
Output frequency (pin 15) without adjustment	$f_{\text{osc}}$	10,9	11,5	12,1	MHz
Frequency stability at $-20$ to $+60\text{ }^\circ\text{C}$		—	—	1	%
<b>Stop.Start input (pin 5)</b>					
Stop = "0": oscillator running**					
Stop = "1": oscillator stops					
Threshold voltage	$V_{5-3}$	0,9	—	1,8	V
Input current at $V_I = 5\text{ V}$	$I_5$	—	—	30	$\mu\text{A}$
<b><math>\phi\text{C}'</math> inputs (pins 8, 7 and 6)</b>					
Threshold voltage	$V_{8, 7, 6-3}$	1,4	1,6	1,8	V
Input current at $V_I = 5\text{ V}$	$I_{8, 7, 6}$	—	—	30	$\mu\text{A}$
<b>Outputs (pins 9, 11 and 13)</b>					
Output voltage amplitude	$V_{9, 11, 13-3}$	—	1,5	—	V
Timing			(see Fig. 2)		
Average d.c. output voltage	$V_{9, 11, 13-3}(\text{AV})$	—	2	—	V

\* No d.c. load allowed at pin 12.

\*\* Extra running condition to obtain correct outputs.

$\phi 1\text{C}' = \text{HIGH}$  (pin 8)

$\phi 2\text{C}' = \text{LOW}$  (pin 7)

$\phi 3\text{C}' = \text{LOW}$  (pin 6)

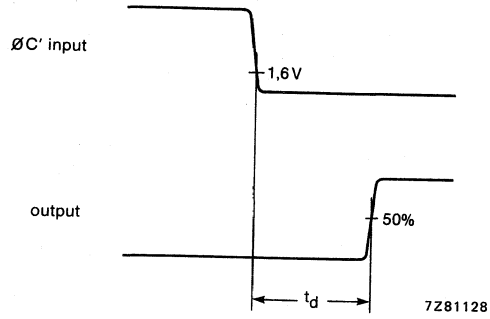


Fig. 2 Output timing.

DEVELOPMENT DATA

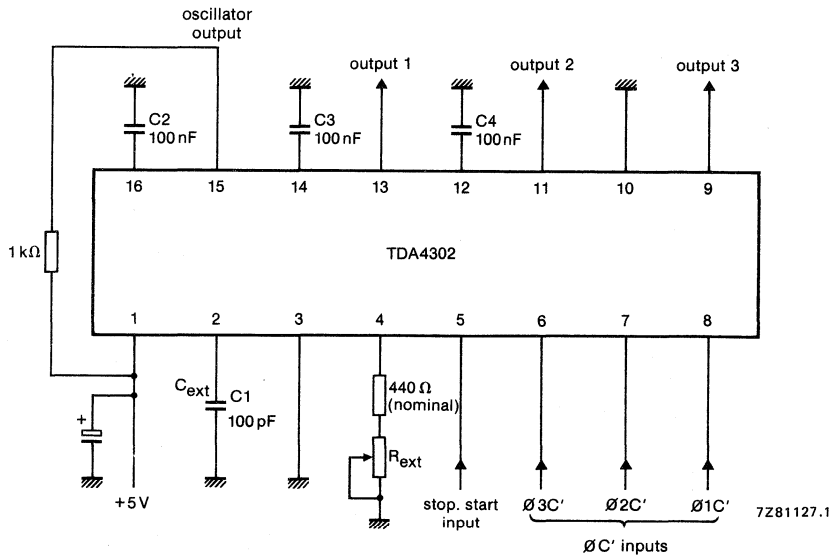


Fig. 3 Application diagram.





## WHITE PROCESSING ENCODER

## GENERAL DESCRIPTION

The TDA4303 is a monolithic integrated circuit that operates in conjunction with the PAL-NTSC encoder (TDA2501) to form the colour encoder part of a television camera. This circuit can also operate in conjunction with the SECAM encoder (TDA2506) and the FM modulator controller (TDA2507) for the SECAM system.

## Features

*Processing part*

- Four input clamping circuits to determine the black levels
- Three  $1/\gamma$  correction circuits
- Four blanking circuits
- Four white clipping circuits
- Colour matrix; that delivers
  - U (with respect to colour difference signal  $D'_B$ )
  - V (with respect to colour difference signal  $D'_R$ )
  - Y and the W signal

*CVBS part*

- Chrominance, luminance and synchronized summation circuit
- Contour amplifier
- A black and a white clipping circuit in the output stage
- Output stage with the capability to drive a  $75 \Omega$  coaxial cable system

## QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 13)	$V_P = V_{13-27}$	4,75	5,0	5,25	V
Supply current (pin 13)	$I_P$	—	65	—	mA
Storage temperature range	$T_{stg}$	-25	—	+ 150	°C
Operating ambient temperature range	$T_{amb}$	-20	—	+ 70	°C

## PACKAGE OUTLINES

TDA4303: 28-lead DIL; plastic with internal heat spreader (SOT-117).  
 TDA4303T: 28-lead mini-pack; plastic (SO-28; SOT-136A).

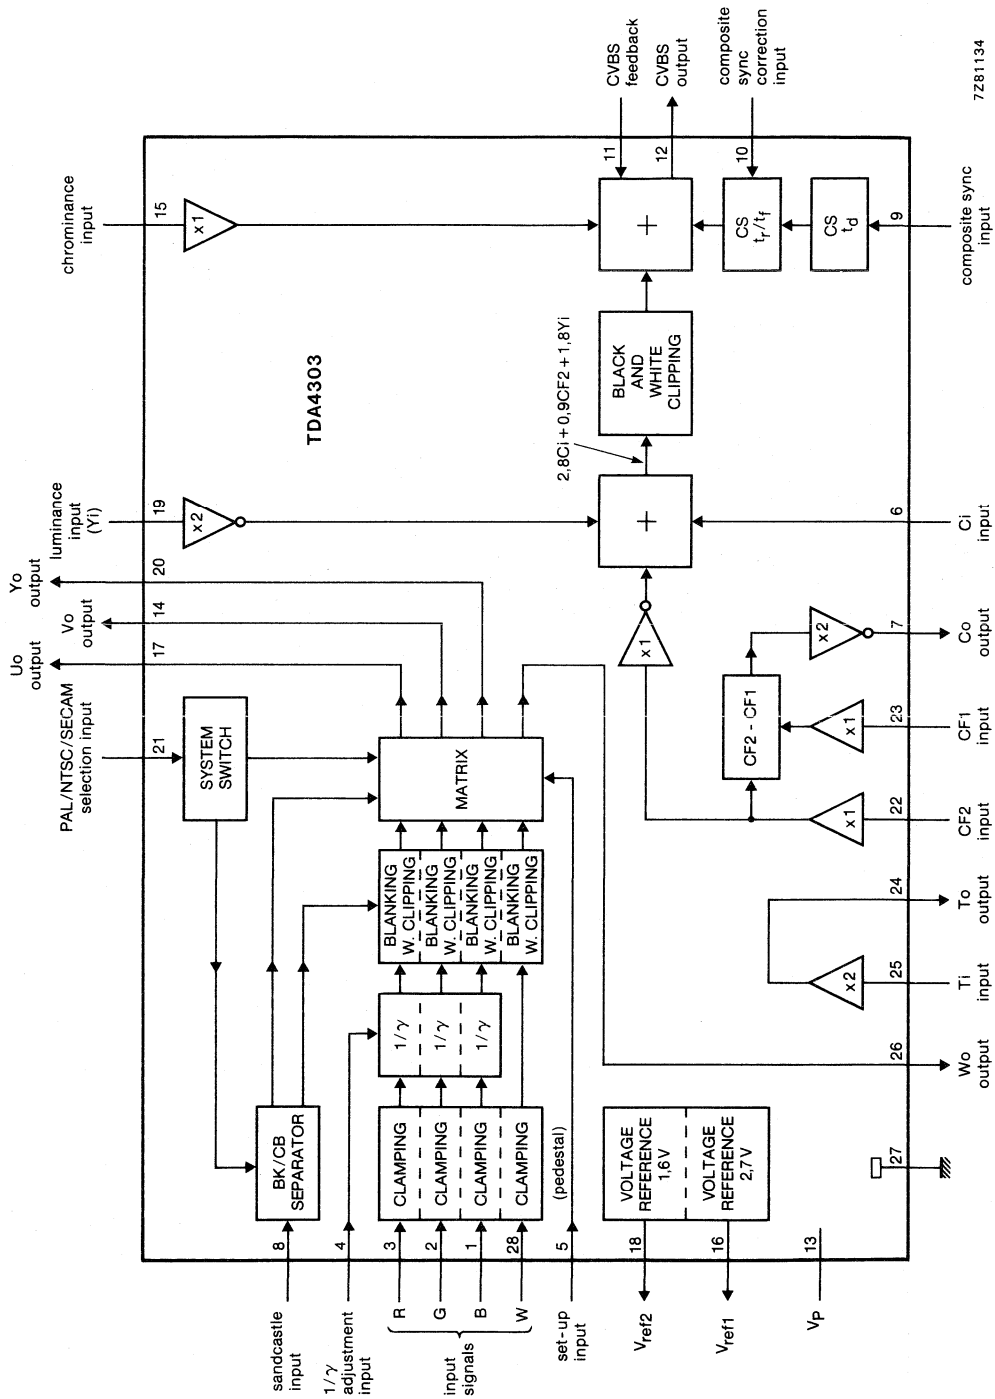


Fig. 1 Block diagram.

7Z81134

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 13)	$V_p$	max.	12 V
Total power dissipation			
SO package *	$P_{tot}$	max.	730 mW
DIL package	$P_{tot}$	max.	1000 mW
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-20 to + 70 °C

DEVELOPMENT DATA

\* Mounted on p.c.b.

## CHARACTERISTICS

 $V_P = V_{13-27} = 5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage (pin 13)	$V_P$	4,75	5	5,25	V
Supply current (pin 13) (75 $\Omega$ resistor to CVBS output)	$I_P$	—	65	—	mA
<b>PROCESSING PART</b>					
Input signals RGB and W					
R (pin 3); G (pin 2); B (pin 1); W (pin 28) (peak-to-peak value)	$V_{n-27(p-p)}$	—	1,0	1,3	V
$U_o$ output signal (pin 17; peak value) at $V_{1-27(p-p)} = 1 \text{ V}$	$V_{17-27(M)}$	0,68	0,72	0,75	V
$V_o$ output signal (pin 14; peak value) for PAL and NTSC at $V_{3-27(p-p)} = 1 \text{ V}$	$V_{14-27(M)}$	0,95	1,0	1,05	V
$V_o$ ( $D'_R$ ) output signal (pin 14; peak value) for SECAM at $V_{3-27(p-p)} = 1 \text{ V}$	$V_{14-27(M)}$	0,68	0,72	0,75	V
$Y_o$ output (pin 20; peak value) at $V_{3, 2, 1-27(p-p)} = 1 \text{ V}$ and $V_{28-27(p-p)} = 0 \text{ V}$	$V_{20-27(M)}$	0,95	1,0	1,05	V
$W_o$ output (pin 26; peak value) at $V_{28-27(p-p)} = 1 \text{ V}$	$V_{26-27(P)}$	0,95	1,0	1,05	V
$1/\gamma$ tracking between $U_o$ , $V_o$ and $Y_o$ outputs		—	1	2	%
$1/\gamma$ correction of $U_o$ , $V_o$ and $Y_o^*$		0,50	0,55	0,65	
Ratio $\frac{Y_o}{W_o}$ at $V_{28-27(p-p)} = 1 \text{ V}$		0,95	1,00	1,05	
Set-up $Y_o$ output at $V_{\text{pedestal}} = V_{\text{ref2}} - 0,1 \text{ V}$		—	0,1	—	V
White clipping $U_o$ , $Y_o$ and $W_o$ outputs with respect to $1 \text{ V}(p-p)$		—	120	—	%

\* 2,2 k $\Omega$  ( $\pm 5\%$ ) load resistor connected between  $1/\gamma$  control input (pin 4) and ground (pin 27).

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Burst amplitude during PAL</b>					
(system switch $V_{21-27} = 5 \text{ V}$ )					
Uo output (with respect to black level) (peak-to-peak value)	$V_{17-27(p-p)}$	-233	-246	-258	mV
Vo output (with respect to black level) (peak-to-peak value)	$V_{14-27(p-p)}$	233	246	258	mV
Ratio $\frac{\text{Burst } U_o}{\text{Burst } V_o}$	$\frac{V_{17-27}}{V_{14-27}}$	0,965	1,0	1,035	
<b>Burst amplitude during NTSC</b>					
(system switch $V_{21-27} = 0 \text{ V}$ )					
Uo output (with respect to black level) (peak-to-peak value)	$V_{17-27(p-p)}$	-330	-350	-370	mV
<b>D.C. output voltage levels</b>					
Uo and Vo outputs	$V_{17, 14-27}$	2,3	2,5	2,7	V
Yo and Wo outputs	$V_{20, 26-27}$	-	1,6	-	V
Black level decay of Vo, Uo, Yo and Wo outputs (during video scanning)	$V_{n-27}$	-	-	6	mV
Reference voltage $V_{ref2}$	$V_{18-27}$	1,4	1,6	1,8	V
Reference voltage $V_{ref1}$	$V_{16-27}$	2,5	2,7	2,9	V
Power supply rejection ratio at Vo, Uo, Yo and Wo outputs (1 kHz)	R/R	-	tbf	-	dB
<b>System switch (pin 21)</b>					
PAL system ON	$V_{21-27}$	3,8	-	-	V
SECAM system ON	$V_{21-27}$	1,4	-	3,1	V
NTSC system ON	$V_{21-27}$	-	-	1,0	V
<b>Sandcastle input (pin 8)</b>					
Threshold burst key	$V_{8-27}$	2,5	3,75	$V_p$	V
Input current at $V_{8-27} = 5 \text{ V}$	$I_g$	-	500	-	$\mu\text{A}$
Threshold composite blanking	$V_{8-27}$	-	1,25	2,5	V
Input current at $V_{8-27} = 2,5 \text{ V}$	$I_g$	-	5	-	$\mu\text{A}$
Input leakage current at $V_{8-27} = 0 \text{ V}$	$\pm I_L$	-	tbf	-	$\mu\text{A}$

## CHARACTERISTICS (continued)


parameter	symbol	min.	typ.	max.	unit
<b>CVBS PART</b>					
(A.C. coupled, 150 $\Omega$ output load)					
<b>Chrominance input (pin 15)</b>					
D.C. input bias voltage = $V_{ref2}$					
Input voltage range (100% saturated) (peak-to-peak value)	$V_{15-27}$	—	0,5	0,55	V
Input resistance	$R_{15}$	100	—	—	$k\Omega$
Input capacitance	$C_I$	—	—	5	pF
<b>CVBS amplitude (pin 12)</b>					
Black level CVBS output signal	$V_{12-27}$	—	1,6	—	V
Maximum output voltage swing (peak-to-peak value)	$V_{12-27(p-p)}$	2,7	3,6	—	V
Synchronization input pulse (CS) (peak-to-peak value)	$V_{9-27(p-p)}$	0,6	—	$V_P$	V
Delay between CS input to CVBS output *	$t_d$	200	—	—	ns
Luminance output component with Y input = 0,5 V(p-p) (peak-to-peak value)	$V_{12-27(p-p)}$	—	1,4	—	V
Chrominance output component with chrominance input = 0,6 V(p-p) (peak-to-peak value)	$V_{12-27(p-p)}$	—	2,15	—	V
Differential gain	dG	—	—	2	%
Differential phase	$d\phi$	—	—	1	deg.
Power supply rejection ratio (1 kHz)					
$20 \log \frac{V_{CVBS}}{V_P}$	RR	—	30	—	dB
<b>Y input (pin 19)</b>					
Input voltage range (peak-to-peak value)	$V_{19-27(p-p)}$	—	0,5	0,55	V
Input resistance	$R_{19}$	100	—	—	$k\Omega$
Input capacitance	$C_I$	—	—	5	pF

\* See application information; Figs 2 and 3.

parameter	symbol	min.	typ.	max.	unit
<b>Contour inputs (CF1 pin 23; CF2 pin 22)</b>					
Input voltage range (peak-to-peak value)	$V_{23, 22-27(p-p)}$	—	1,0	1,2	V
Contour gain range between Ci input and CVBS output	$G_{6-12}$	—	4,4	—	
White clipping level (with respect to 1,4 V $Y_o$ component of the CVBS output signal)		—	120	—	%
Black clipping level (with respect to 1,4 V $Y_o$ component of the CVBS output signal)		-10	-7	-5	%
WT3 buffer gain		—	2	—	
Delay between CF1 input and CVBS output	$t_{d1}$	—	20	—	ns
Delay between CF2 input and CVBS output	$t_{d2}$	—	40	—	ns

DEVELOPMENT DATA

## APPLICATION INFORMATION

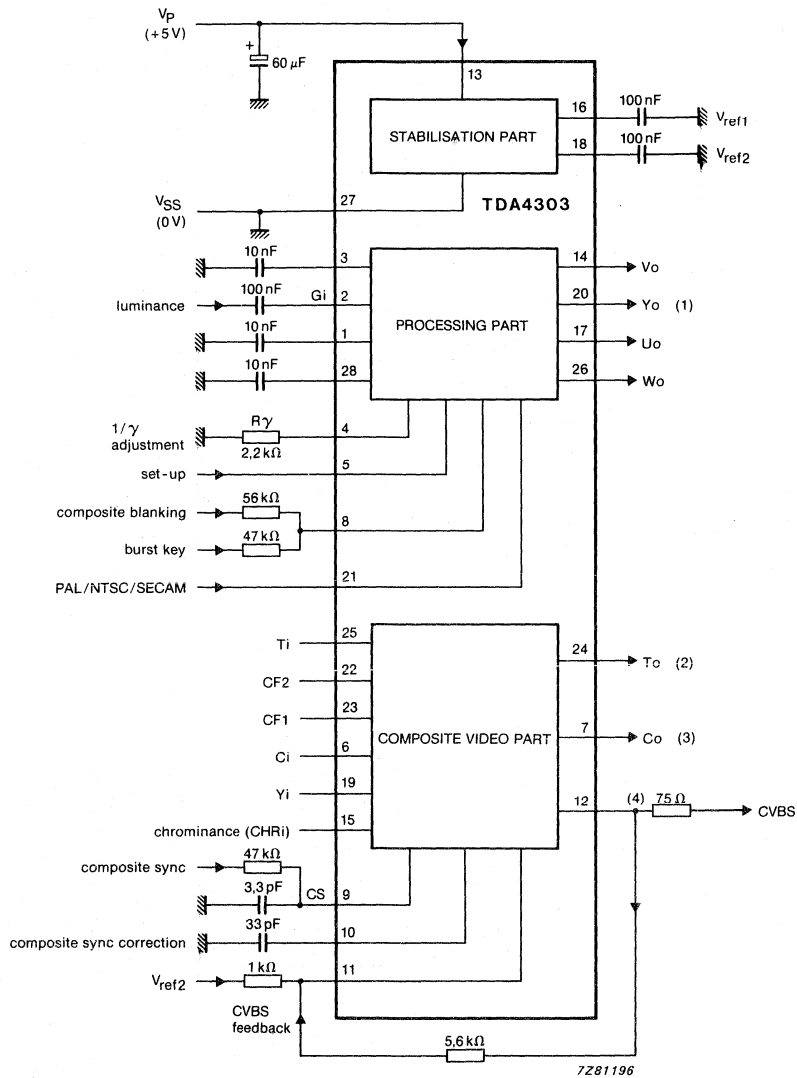


- (1)  $Y_o$  output (pin 20) =  $(0,587 E' G_i) - \text{set-up}$ .  
With:  $E'$  (input amplitude) =  $E_i$   $1/\gamma$ ;  $\gamma = 0,55$ ;  $R_\gamma = 2,2 \text{ k}\Omega$ .
- (2)  $T_o$  output (pin 24) =  $2 \times T_i$ .  
(input  $T_i$  biased to  $V_{ref2}$  when not used).
- (3)  $C_o$  output (pin 7) =  $2 \times (CF_2 - CF_1)$ .  
(inputs  $CF_1$ ,  $CF_2$  biased to  $V_{ref2}$  when not used).
- (4)  $CVBS$  output (pin 12) =  $(1,4 CF_2 + 4,4 C_i + 2,8 Y_i + 3,58 CHR_i) - 0,615 CS$   
(inputs  $CF_2$ ,  $C_i$ ,  $Y_i$ ,  $CHR_i$ ,  $CS$  biased to  $V_{ref2}$  when not used).

Fig. 2 Application diagram for black and white television camera.



DEVELOPMENT DATA

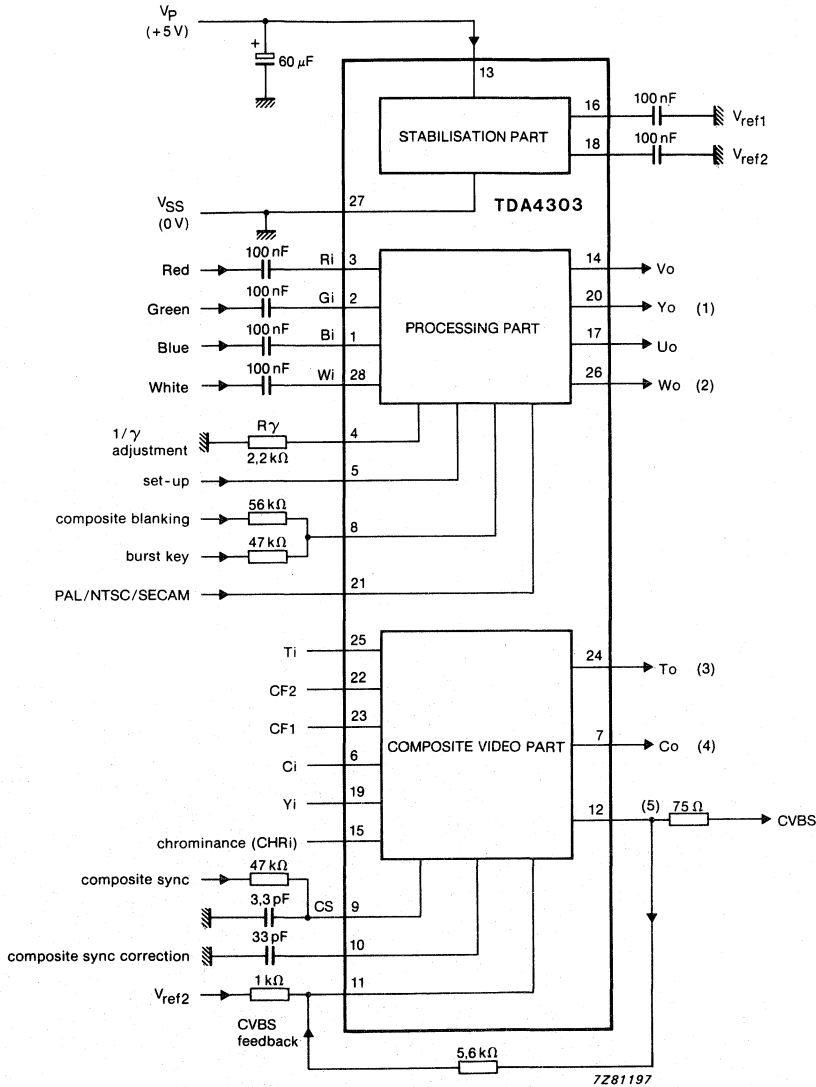

- (1) Y<sub>o</sub> output (pin 20) = (Y - W<sub>o</sub>) - set-up.  
With:  $Y = 0,299 E_i R_i + 0,587 E_i G_i + 0,114 E_i B_i$  and  
 $E'$  (input amplitude) =  $E_i / \gamma$ ;  $\gamma = 0,55$ ;  $R_\gamma = 2,2 \text{ k}\Omega$ .
- (2) W<sub>o</sub> output (pin 26) = W<sub>i</sub>.
- (3) T<sub>o</sub> output (pin 24) = 2 x T<sub>i</sub>.  
(input T<sub>i</sub> biased to V<sub>ref2</sub> when not used).
- (4) C<sub>o</sub> output (pin 7) = 2 x (CF2 - CF1).  
(inputs CF1, CF2 biased to V<sub>ref2</sub> when not used).
- (5) CVBS output (pin 12) = (1,4 CF2 + 4,4 C<sub>i</sub> + 2,8 Y<sub>i</sub> + 3,58 CHR<sub>i</sub>) - 0,615 CS  
(inputs CF2, C<sub>i</sub>, Y<sub>i</sub>, CHR<sub>i</sub>, CS biased to V<sub>ref2</sub> when not used).

Fig. 3 Application diagram for colour television camera.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4304

## D.C. CONTROL CIRCUIT

### GENERAL DESCRIPTION

This monolithic integrated circuit is intended to control or clamp the d.c. inputs of image sensors NXA1010 to NXA1040. The d.c. levels of the input signals  $\phi A$ , B and TG of the image sensor can be adjusted by inputs POLY (1, 2 and 3) and DC-TG1 and 2 of this IC.

The d.c. levels of the input signals  $P_{sub}$ , RD,  $\phi C$  (1, 2 and 3) of the image sensor are adjusted by the inputs DC- $P_{sub}$  (pin 10), DC-RD (pin 15) and DC- $\phi C$  (pin 20) of this IC.

Clamping is active during video scantime and is necessary because of the a.c. coupling of the drivers to the sensor.

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage range (pin 16)	$V_{CC1}$	15	15,2	15,5	V
Supply voltage range (pin 1)	$V_{CC2}$	11,00	11,25	11,50	V
Supply current range (pin 16)	$I_{CC1}$	6	8,3	10,5	mA
Supply current range (pin 1)	$I_{CC2}$	—	—	1,0	mA
Total power dissipation	$P_{tot}$	—	—	500	mW
Storage temperature	$T_{stg}$	-25	—	+ 150	°C
Operating ambient temperature	$T_{amb}$	-20	—	+ 70	°C

### PACKAGE OUTLINE

28-lead mini-pack; plastic (SO-28; SOT-136A).

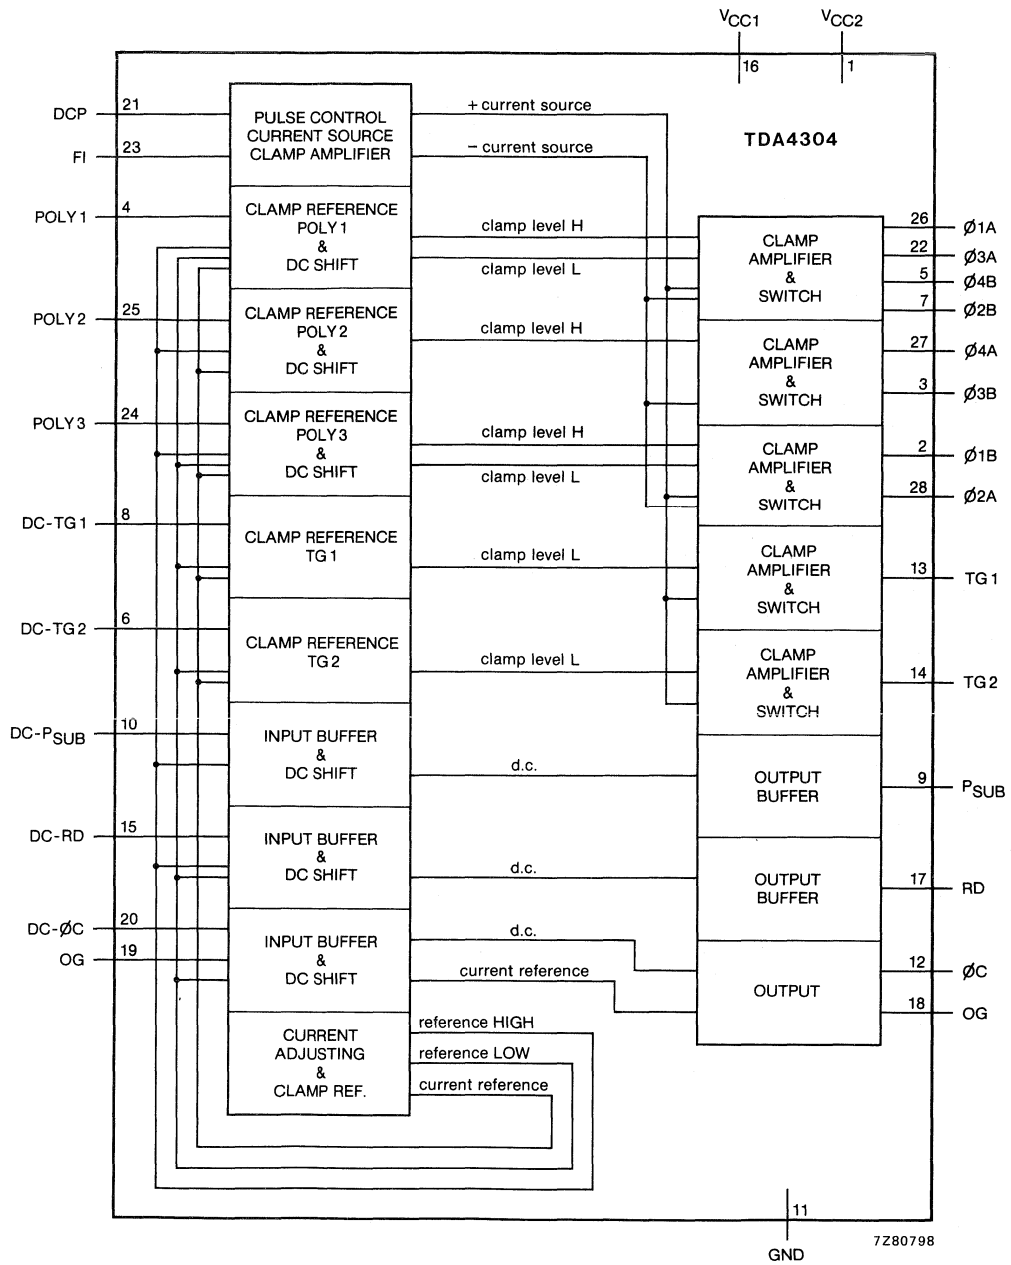


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 16)	V <sub>CC1</sub>	—	—	18	V
Supply voltage (pin 1)	V <sub>CC2</sub>	—	—	18	V
Total power dissipation	P <sub>tot</sub>	—	—	500	mW
Sink current of the output stages	I <sub>OS</sub>	—	—	−10	mA
Source current (pins 17 and 12)	I <sub>17, 12</sub>	—	—	+ 10	mA
Differential input voltage	V <sub>1-19</sub>	—	—	5	V
Storage temperature	T <sub>stg</sub>	−25	—	+ 150	°C
Operating ambient temperature	T <sub>amb</sub>	−20	—	+ 70	°C

**CHARACTERISTICS**V<sub>CC2</sub> = 11,25 V; V<sub>CC1</sub> = 15,2 V; T<sub>amb</sub> = 25 °C

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 16)	V <sub>CC1</sub>	15	15,2	15,5	V
Supply voltage (pin 1)	V <sub>CC2</sub>	11,00	11,25	11,50	V
Supply current (pin 16)	I <sub>CC1</sub>	6	8,3	10,5	mA
Supply current (pin 1)	I <sub>CC2</sub>	—	—	1,0	mA
<b>Inputs</b>					
POLY <sub>1, 2, 3</sub> DG-TG <sub>1, 2</sub> pins 4, 25, 24, 8 and 6					
input voltage range	V <sub>i</sub>	0	—	3,5	V
input current (V <sub>i</sub> = 0 V)	I <sub>i</sub>	0	−0,3	−1,5	μA
Input voltage range					
DC-RD	V <sub>15-11</sub>	0	—	4,7	V
DC-P <sub>SUB</sub> and DC-φC	V <sub>10, 20-11</sub>	0	—	5,0	V
Input current					
DC-φC					
(V <sub>i</sub> = 5 V)	I <sub>20</sub>	0	+ 0,1	+ 0,3	μA
DC-P <sub>sub</sub> and RD					
(V <sub>i</sub> = 0 V)	I <sub>10, 15</sub>	0	−0,1	−0,3	μA
Threshold voltage DCP, FI	V <sub>21, 13-11</sub>	1,9	2,2	2,5	V
Input current DCP and FI					
V <sub>i</sub> = 5 V	I <sub>21, 23</sub>	—	—	10	μA
<b>Outputs</b>					
CLAMP OUTPUTS (on state)					
Clamping voltage HIGH					
	V <sub>CLH</sub>	min.	V <sub>typ</sub> − 0,2		V
	V <sub>CLH</sub>	typ.	V <sub>i</sub> + 10,65		V
	V <sub>CLH</sub>	max.	V <sub>typ</sub> + 0,2		V
Clamping voltage LOW					
	V <sub>CLL</sub>	min.	V <sub>typ</sub> − 0,1		V
	V <sub>CLL</sub>	typ.	V <sub>i</sub> + 0,7		V
	V <sub>CLL</sub>	max.	V <sub>typ</sub> + 0,1		V
Output clamping current	I <sub>CL</sub>	13,5	—	—	μA

DEVELOPMENT DATA

## Clamp outputs, related to inputs

input pin	POLY								DC-TG	
	1 4	3 24	1 4	2 25	3 24	1 4	2 25	1 4	1 8	2 6
output pin	$\phi 1A$ 26	$\phi 2A$ 28	$\phi 3A$ 22	$\phi 4A$ 27	$\phi 1B$ 2	$\phi 2B$ 7	$\phi 3B$ 3	$\phi 4B$ 5	TG1 13	TG2 14
clamp level	H L	H L	L H	H L	L H	H L	H L	L H	L	L

## Considerations:

Clamp on if DCP = HIGH

When FI = LOW  $\phi 1A$  (pin 26) = LOWand  $\phi 3A$  (pin 22) = HIGH

H/L and L/H = depends on FI (pin 23) state

parameter	symbol	min.	typ.	max.	unit
CLAMP OUTPUTS (off state)					
Clamping output current	$I_{CL}$	-1,0	-	+ 1,0	$\mu A$
OUTPUT $P_{SUB}$ (pin 9)					
Output voltage	$V_{PSUB}$	min.	$V_{typ} - 0,1$		V
	$V_{PSUB}$	typ.	$V_i + 4$		V
	$V_{PSUB}$	max.	$V_{typ} + 0,1$		V
Output current	$I_{PSUB}$	-1,0	-	-	mA
OUTPUT RD (pin 17)					
Output voltage	$V_{RD}$	min.	$V_{typ} - 0,15$		V
	$V_{RD}$	typ.	$V_i + 9,45$		V
	$V_{RD}$	max.	$V_{typ} + 0,15$		V
Output current	$I_{RD}$	1,0	-	-	mA
OUTPUT $\phi C$ (pin 12)					
Output voltage	$V_{\phi C}$	min.	$V_{typ} - 0,1$		V
	$V_{\phi C}$	typ.	-		V
	$V_{\phi C}$	max.	$V_{typ} + 0,1$		V
Output voltage range	$V_{\phi C}$	4,0	-	11	V
OUTPUT OG (pin 18)					
		$I_{19} = + 100 \mu A$			
Output voltage	$V_{OG}$	9,6	-	-	V
		$R_L = 100 k\Omega$ ; input DC- $\phi C = 0 V$			
Output current	$I_{OG}$	96	100	104	$\mu A$

DEVELOPMENT DATA

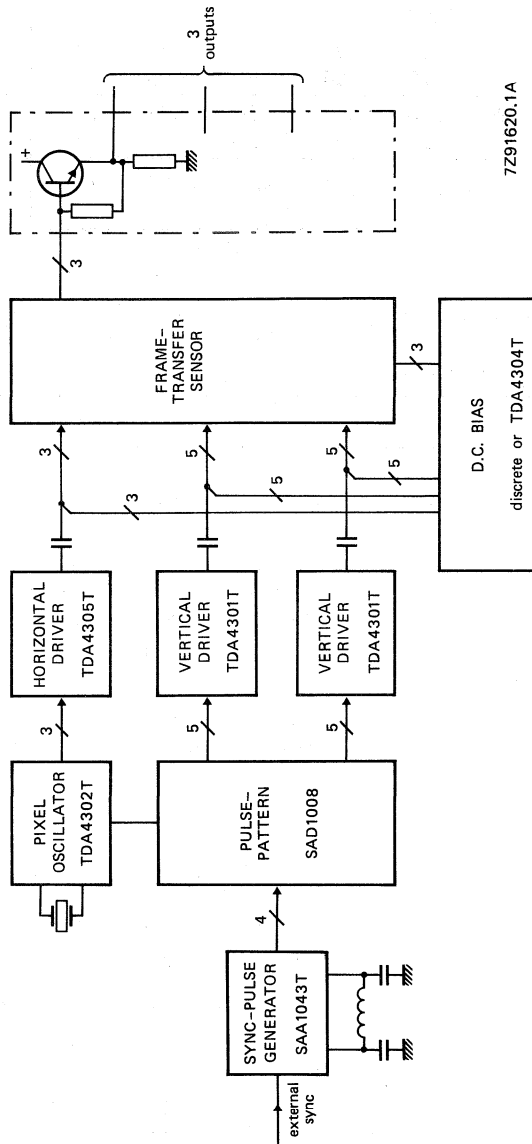


Fig. 2 Control circuitry for driving the NXA1010 to NXA1040 frame-transfer sensors.





# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4305T

## HORIZONTAL DRIVER

### GENERAL DESCRIPTION

The TDA4305T is a monolithic integrated circuit which drives the output registers of the frame transfer sensors (NXA1010/1040).

### Features

- Three inverting buffers
- Adjustable duty cycle control
- Voltage reference circuit

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltages					
pin 13	$V_{P1} = V_{13-6}$	4,5	5,0	5,5	V
pin 8	$V_{P2} = V_{8-6}$	11,0	11,25	11,5	V
pin 14	$V_{P3} = V_{14-6}$	11,0	11,25	11,5	V
Supply current (quiescent)					
pin 13 (outputs HIGH)	$I_{P1}$	—	17	—	mA
pin 13 (outputs LOW)	$I_{P1}$	—	8	—	mA
pin 8	$I_{P2}$	—	9	—	mA
pin 14	$I_{P3}$	—	5	—	mA
Total power dissipation	$P_{tot}$	—	360	—	mW
Storage temperature range	$T_{stg}$	-25	—	+ 150	°C
Operating ambient temperature range	$T_{amb}$	-20	—	+ 70	°C

### PACKAGE OUTLINE

14-lead mini-pack; plastic (SO-14; SOT-108A).

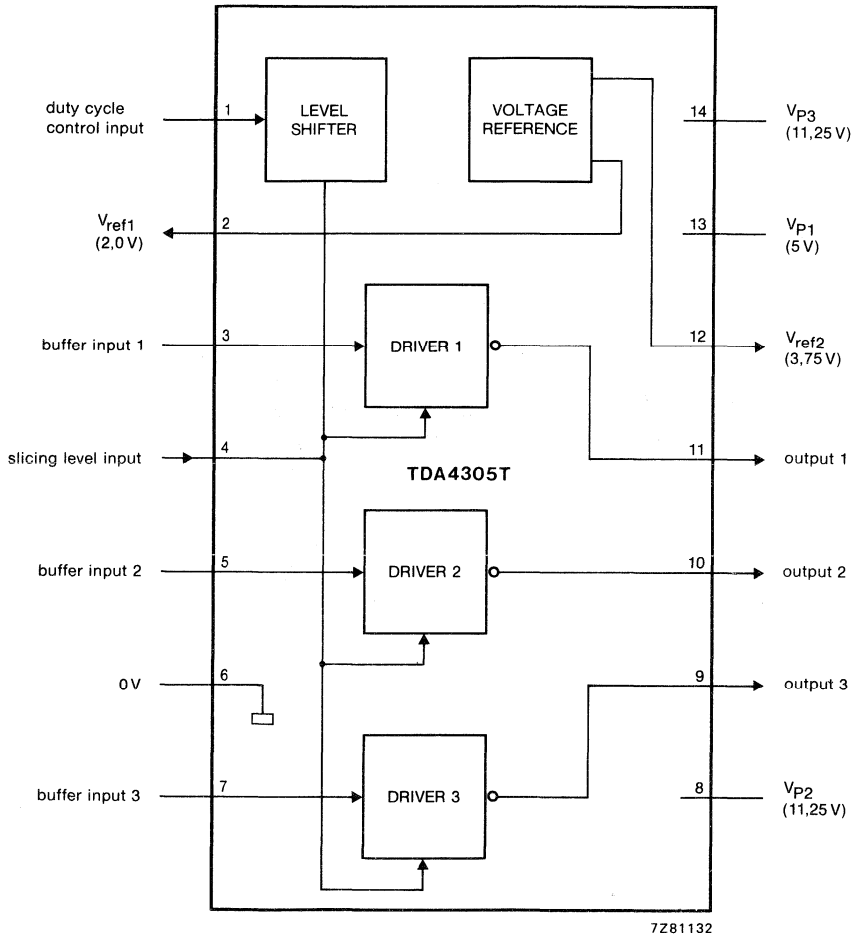


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

## Supply voltages

pin 13	$V_{P1}$	max.	12 V
pin 8	$V_{P2}$	max.	12 V
pin 14	$V_{P3}$	max.	12 V

## Input voltage (pins 1, 3, 4, 5 and 7)

$V_I$	max.	$V_{P1}$ V
-------	------	------------

## Short-circuit current (pin 12)

$t < 1$ s	$I_{12}$	max.	100 mA
-----------	----------	------	--------

## Output current (pins 9, 10 and 11)

$t < 1$ s	$I_O$	max.	15 mA
-----------	-------	------	-------

## Total power dissipation\*

$P_{tot}$	max.	400 mW
-----------	------	--------

## Storage temperature range

$T_{stg}$	-25 to + 150 °C
-----------	-----------------

## Operating ambient temperature range

$T_{amb}$	-20 to + 70 °C
-----------	----------------

DEVELOPMENT DATA


\* Mounted on p.c.b.

## CHARACTERISTICS

$V_{P1} = V_{13-6} = 5 \text{ V}$ ;  $V_{P2} = V_{8-6} = 11,25 \text{ V}$ ;  $V_{P3} = V_{14-6} = 11,25 \text{ V}$ ;  $T_{amb} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage					
pin 13	$V_{P1}$	4,5	5,0	5,5	V
pin 8	$V_{P2}$	11,0	11,25	11,50	V
pin 14	$V_{P3}$	11,0	11,25	11,50	V
Supply current (quiescent)					
pin 13 (outputs HIGH)	$I_{P1}$	—	17	—	mA
pin 13 (outputs LOW)	$I_{P1}$	—	8	—	mA
pin 8	$I_{P2}$	—	9	—	mA
pin 14	$I_{P3}$	—	5	—	mA
Supply current (peak)*					
pin 8 (one transition only)	$I_M$	—	30	—	mA
Total power dissipation with NXA1020	$P_{tot}$	—	360	—	mW
<b>Reference voltages</b>					
2,0 V reference voltage (pin 2)	$V_{ref1}$	1,8	2,0	2,2	V
3,75 V reference voltage (pin 12)	$V_{ref2}$	3,6	3,75	3,9	V
Source current (pins 2 and 12)	$I_{2, 12}$	—	—	3	mA
<b>Duty cycle control input (pin 1)</b>					
Input voltage	$V_{1-6}$	1,75	—	2,75	V
Input current at $V_{1-6} = 2,75 \text{ V}$	$I_1$	—	—	30	$\mu\text{A}$
<b>Buffer inputs (pins 3, 5 and 7)</b>					
Input current at $V_{3, 5, 7-6} = 5 \text{ V}$	$I_{3, 5, 7}$	—	—	30	$\mu\text{A}$
Threshold voltage	$V_{3, 5, 7-6}$	—	2	—	V
<b>Timing (<math>C_L = 68 \text{ pF}</math>; see Fig. 2)</b>					
Rise time	$t_r$	20	—	40	ns
Fall time	$t_f$	20	—	40	ns
Delay time	$t_d$	—	70	100	ns
<b>Outputs (pins 9, 10 and 11)</b>					
Output voltage swing	$V_{9, 10, 11-6}$	—	10	—	V

\* Pulses shifted 120 degrees.

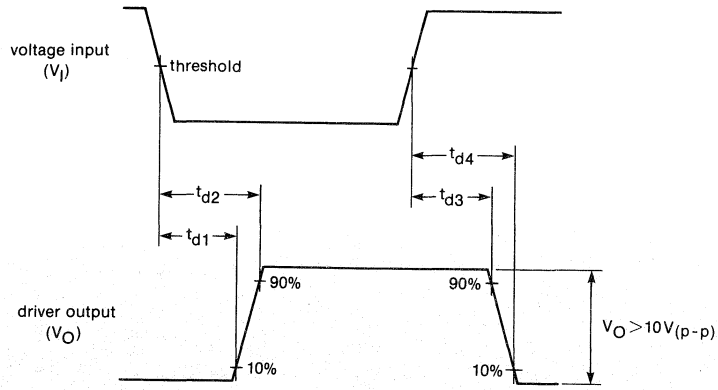


7Z81131

Where:  $t_{d1} = t_d$ ;  $t_{d3} = t_d$ ;  $t_{d2} - t_{d1} = t_r$ ;  $t_{d4} - t_{d3} = t_f$ .

Fig. 2 Output timing.

DEVELOPMENT DATA

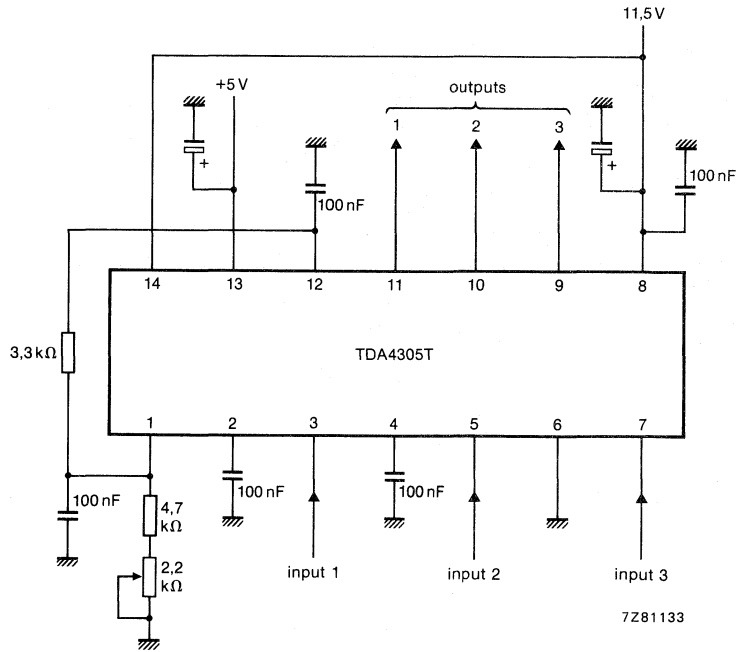

7Z81133

Fig. 3 Application diagram.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4306

## MASTER GAIN

### GENERAL DESCRIPTION

The TDA4306 is a monolithic integrated circuit which controls the amplification of the four output signals (White, Yellow, Green and Cyan) from the frame transfer sensors (NXA1020/40). The matching of the four channels is excellent over the whole control and temperature range. An on-chip white clipping circuit protects the white processor (TDA4303) from output signals that are too large. If white clipping occurs, a pulse is available to kill the colour information. Highlights will always be white, not coloured.

### Features

- Four variable gain amplifiers
- White clipping circuit
- Blanking switch
- 2,1 V reference voltage

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 20)	$V_P = V_{20-10}$	4,75	5,0	5,25	V
Reference voltage (pin 6)	$V_{ref}$	1,9	2,1	2,3	V
Total power dissipation	$P_{tot}$	90	140	200	mW
Storage temperature range	$T_{stg}$	-25	-	+ 150	°C
Operating ambient temperature range	$T_{amb}$	-20	-	+ 70	°C

### PACKAGE OUTLINES

TDA4306 : 20-lead DIL; plastic (SOT-146).

TDA4306T: 20-lead mini-pack; plastic (SO-20; SOT-163A).

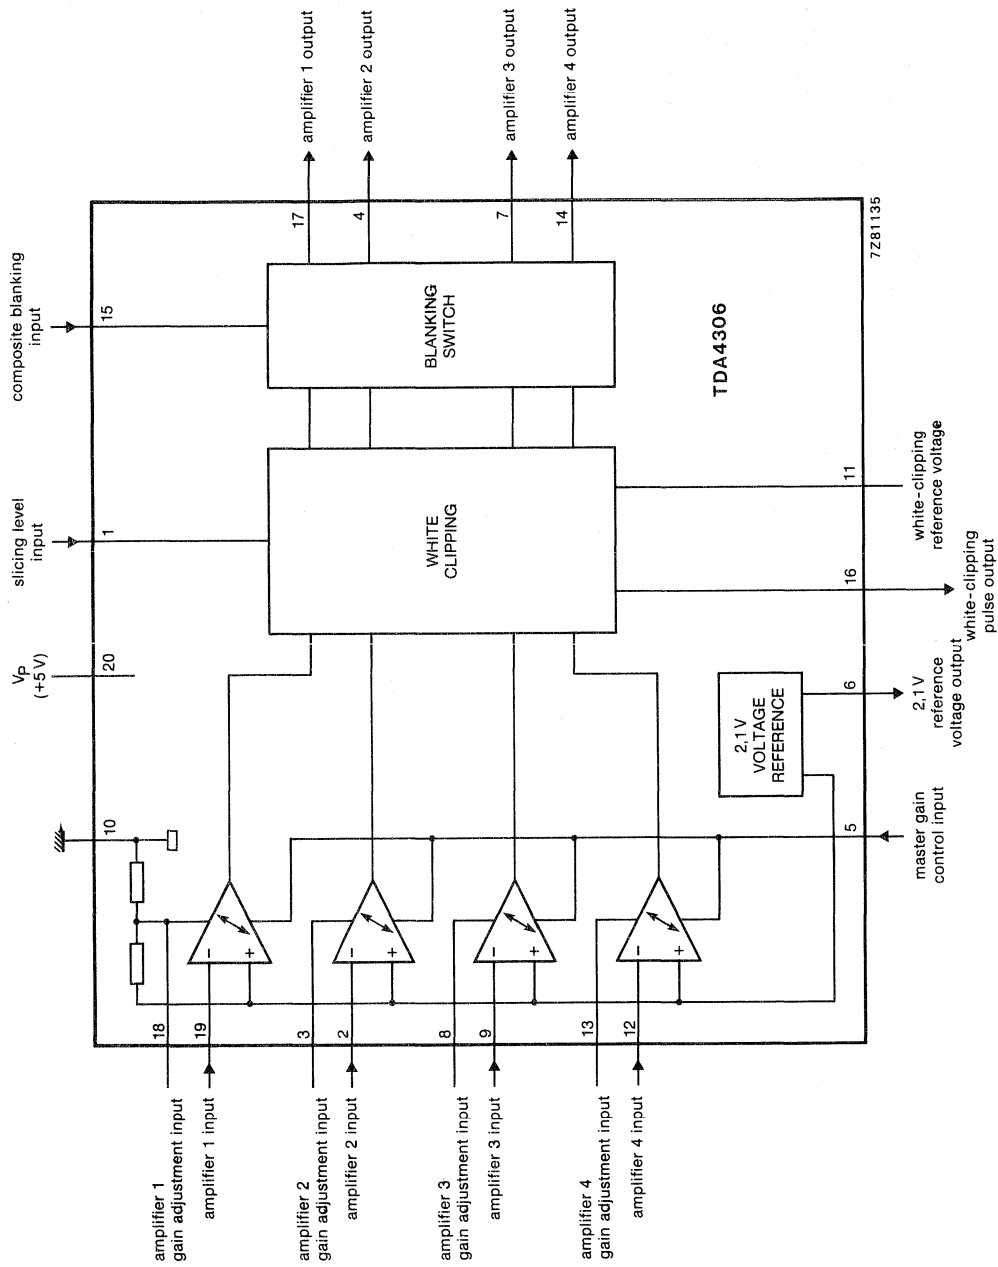


Fig. 1 Block diagram.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 20)	$V_P$	max.	12 V
Input voltage (pins 1, 2, 3, 5, 8, 9, 12, 13, 15, 18 and 19)	$V_I$	max.	5 V
Output current (pins 17, 4, 7 and 14) $t < 1$ s	$I_O$	max.	100 mA
Total power dissipation			
SO package*	$P_{tot}$	max.	370 mW
DIL package	$P_{tot}$	max.	1000 mW
Storage temperature range	$T_{stg}$		-25 to + 150 °C
Operating ambient temperature range	$T_{amb}$		-20 to + 70 °C

DEVELOPMENT DATA

\* Mounted on p.c.b.

## CHARACTERISTICS

 $V_p = V_{20-10} = 5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage (pin 20)	$V_p$	4,75	5,0	5,25	V
Reference voltage (pin 6)	$V_{\text{ref}}$	1,9	2,1	2,3	V
Temperature drift of $V_{\text{ref}}$	$\Delta V_{\text{ref}}$	—	0,18	—	mV/ $^\circ\text{C}$
External load current	$I_{L(\text{ext.})}$	—	—	10	mA
Total power dissipation	$P_{\text{tot}}$	90	140	200	mW
<b>Variable gain amplifiers</b>					
<i>Inputs</i> (pins 2, 9, 12 and 19; note 1)					
Input voltage (peak-to-peak value)					
negative video	$V_{n-10(p-p)}$	—	—	—1100	mV
positive video (gain = 1)	$V_{n-10(p-p)}$	—	—	400	mV
Input bias current at $V_I = 2,6 \text{ V}$	$I_{n(\text{bias})}$	—	2,2	5	$\mu\text{A}$
Input resistance	$R_{2, 9, 12, 19}$	—	300	—	k $\Omega$
<i>Outputs</i> (pins 17, 4, 7 and 14)					
D.C. offset voltage of input to output (output = $V_{\text{ref}}$ )					
		—	—	—220	mV
D.C. offset voltage of input to output (output = $V_{\text{ref}}$ )					
		—	—	100	mV
Offset voltage between blanked output and $V_{\text{ref}}$					
		—	—	2	mV
Drift of blanked output voltages	$\Delta V_O$	10	—	—	$\mu\text{V}/^\circ\text{C}$
Output sink current	$I_{\text{OS}}$	—	—	100	$\mu\text{A}$
Resistive load of output to ground	$R_L$	1,5	—	—	k $\Omega$
Output voltage swing at $V_{\text{ref}} = 2,1 \text{ V}$		—	$V_{\text{ref}} - 500 \text{ mV}$	—	
Output voltage swing at $V_{\text{ref}} = 2,1 \text{ V}$		—	$V_{\text{ref}} + 1200 \text{ mV}$	—	
Output impedance	$ Z_O $	—	100	—	$\Omega$
Power supply rejection ratio (1 kHz)	RR	—	30	—	dB
Bandwidth	B	6	—	—	MHz

DEVELOPMENT DATA


parameter	symbol	min.	typ.	max.	unit
<b>Master gain control input (pin 5)</b>					
Gain control range			see Fig. 2		
Input current at $V_{5-10} = 0 \text{ V}$	$I_5$	—	—	30	$\mu\text{A}$
Matching of gain (note 2) between the 4 channels ( $f_{\text{temp. range}}$ and as $f_{\text{gain range 2 to x 8}}$ )		—	—	1	%
Gain stability = $f_{\text{temp. range } -20 < t < 60 \text{ }^\circ\text{C}}$		—	3	—	%
Differential gain	dG	—	—	1	%
Differential phase	$d\phi$	—	—	2	deg.
<b>Gain adjustment inputs</b>					
(pins 18, 3, 8, 13)					
Input voltage range	$V_{\text{adj}}$	0,9	—	1,9	V
Overall gain (MG = 2) at $V_{\text{adj}} = 0,9 \text{ V}$	G	—	—	2,2	
at $V_{\text{adj}} = 1,9 \text{ V}$	G	1,5	—	—	
Input current (pins 3, 8 and 13) at $V_I = 1,6 \text{ V}$	$I_I$	—	—	2	$\mu\text{A}$
Input resistance (pin 18)	$R_{18}$	—	3,25	—	$\text{k}\Omega$
Input voltage (pin 18; open-circuit)	$V_I$	—	1,2	—	V
<b>White clipping circuit</b>					
Slicing level (pin 1)					
input voltage range	$V_{1-10}$	0,5	—	1,8	V
input current at $V_{1-10} = 1 \text{ V}$	$I_1$	—	—	2	$\mu\text{A}$
White clipping reference voltage (pin 11)	$V_{11-10}$	—	$V_{1-10}$ $\times 2,5 \text{ V}$	—	V
Output pulse (pin 16) (peak-to-peak value)					
	$V_{16-10(p-p)}$	3,0	—	—	V
Output voltage (pin 16)					
LOW	$V_{\text{OL}}$	—	—	1	V
HIGH	$V_{\text{OH}}$	4	—	—	V
Output sink current (pin 16)	$I_{\text{OS}}$	—	—	0,1	$\text{mA}$
Delay of a variable gain amplifier input to white clipping output	$t_d$	—	—	100	ns

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Blanking switch</b> (pin 15)					
Composite blanking input voltage active HIGH	$V_{15-10}$	2,4	—	$V_p$	V
active LOW	$V_{15-10}$	—	—	1,4	V
Input current at $V_{15-10} = 5$ V	$I_{15}$	—	—	2	$\mu A$
Input capacitance	$C_I$	—	—	5	pF
Delay between blanking input and one of the 4 amplifier outputs	$t_d$	—	40	100	ns

## Notes to the characteristics

- The maximum input voltage is permitted only if the input voltage minus the d.c. offset voltage = 2,1 V.  
If the input voltage minus the d.c. offset voltage = 1,6 V, the maximum input voltage is 1 V(p-p).
- Over the range 2 to x 8, after that each channel is adjusted to 0.  
This is possible only if the blanking pulse is switched off and the d.c. input voltage is equal to  $V_{ref}$ .

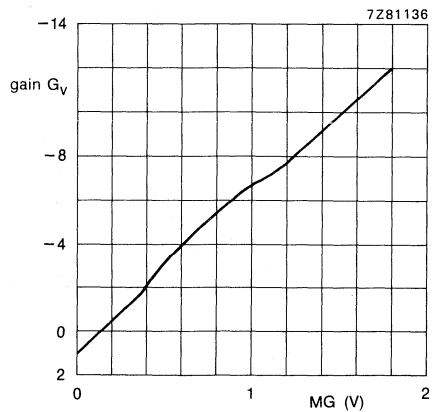Fig. 2 Gain as a function of  $V_{MG}$ .

## SMALL SIGNAL COMBINATION IC FOR MONOCHROME TV

### GENERAL DESCRIPTION

The TDA4500 combines all small signal functions (except the tuner) which are required for a monochrome television receiver.

For a complete monochrome television receiver only output stages are required to be added for horizontal and vertical deflection, video and sound. The TDA4500 can also be used in simple colour television receivers. In this application an external sandcastle pulse generator is required.

It incorporates the following functions:

- vertical sync separator/oscillator
- vertical output
- coincidence detector (sound mute)
- phase detector/frequency control
- a.g.c. detector
- sync separator
- horizontal oscillator
- synchronous demodulator
- vision i.f. amplifier
- tuner a.g.c.
- d.c. volume control
- a.f.c. detector
- video output
- sound demodulator
- audio output
- gate pulse generator
- sound limiter/feedback
- 90° phase shift
- overload detector
- horizontal output

### QUICK REFERENCE DATA

Supply voltage	$V_{7-10}, V_{22-10}$	typ.	10,5	V
Supply current	$I_7$	typ.	75	mA
Supply current	$I_{22}$	typ.	4,5	mA
Operating ambient temperature range	$T_{amb}$		–25 to +65	°C
Storage temperature range	$T_{stg}$		–25 to +150	°C
Power dissipation	$P_{tot}$	max.	1,7	W

### PACKAGE OUTLINE

28-lead DIL; plastic, with internal heat spreader (SOT-117).

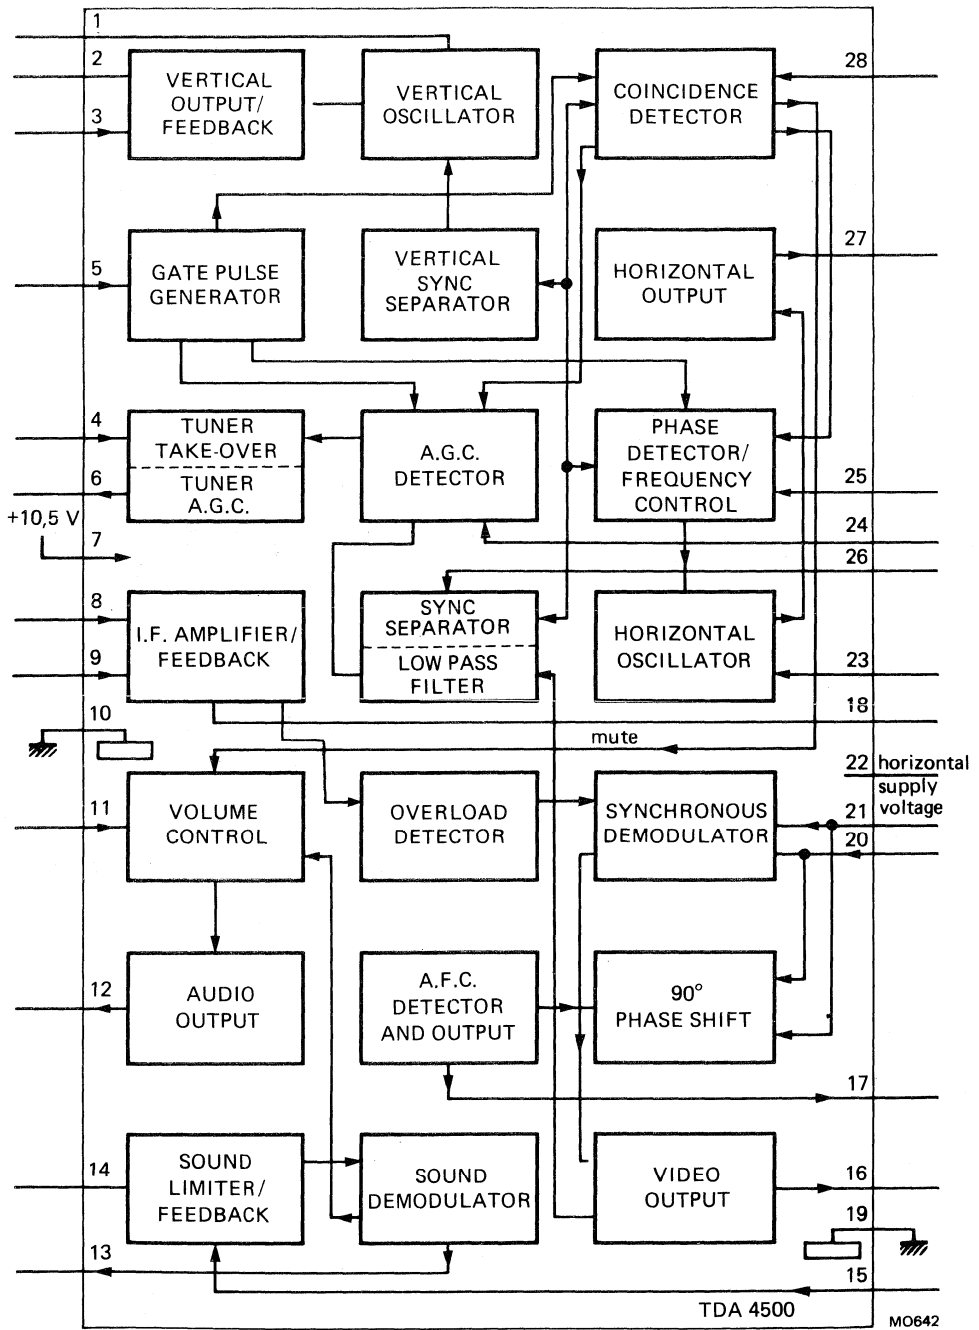


Fig. 1 Block diagram.

## PINNING

Pin number	function	Pin number	function
1.	vertical oscillator	15.	sound i.f.
2.	vertical output	16.	video output
3.	vertical feedback	17.	a.f.c. output
4.	top linearity	18.	decoupling capacitor
5.	flyback pulse	19.	ground
6.	tuner a.g.c.	20.	38,5 MHz reference
7.	+10,5 V supply	21.	(38,9 MHz reference)
8.	i.f. input	22.	horizontal supply voltage
9.	ground	23.	horizontal oscillator
10.	ground	24.	top sync detector
11.	volume control	25.	phase detector
12.	sound output	26.	sync separator
13.	6 MHz tuning (5,5 MHz tuning)	27.	horizontal output
14.	decoupling	28.	mute/coincidence detector

**FUNCTIONAL DESCRIPTION (Fig. 1)**

A complete black-and-white receiver can be built around this circuit by adding only the output stages for horizontal and vertical deflection with the video and sound output stages. The TDA4500 can also be used in simple colour television receivers using an external circuit to generate the sandcastle.

The block diagram (Fig. 1) depicts the various functions which are described briefly below.

The sensitivity of the i.f. amplifier is  $70 \mu\text{V}$  for a peak-to-peak output voltage of 3 V (compare the TDA3541). This amplifier has a symmetrical input (pins 8 and 9) and is followed by a synchronous demodulator. The external tuned circuit is connected to pins 20 and 21. This circuit provides the information for the a.f.c. circuit, the  $90^\circ$  phase shift being supplied by internal RC-networks. An a.f.c. output with a voltage swing of about 9 V is obtained from pin 17 ( $V_{7-10} = 10,5 \text{ V}$ ).

The a.g.c. detector is gated to reduce sensitivity to external electrical noise and the a.g.c. time constant network is connected to pin 24. Gain control range of the i.f. amplifier is greater than 60 dB. Adjustments of the tuner take-over point is made at pin 4. When the voltage at pin 4 is approximately 3,5 V the direction of the tuner control voltage is positive-going. When the voltage at pin 4 is approximately 8 V the direction of the tuner control voltage is negative-going.

An output signal of 3 V (p-p) is obtained from the video amplifier (top sync level 1,5 V) with negative-going sync. Since the sound signal is derived from pin 16 (see Fig. 4) the video output is not blanked during the flyback period. As shown in the application circuit (Fig. 4) the band-pass filter for the sound must be connected between video output (pin 16) and sound i.f. input (pin 15). Sound information passes through a sound limiter network and a sound demodulator circuit with an external tuned circuit for this stage connected to pin 13. The demodulator is followed by a volume control stage with a control range of 80 dB and an output amplifier with an audio output signal of 170 mV (r.m.s.) for a  $\Delta f$  of 7,5 kHz and at maximum volume setting.

The slicing level of the sync separator is referred to the top sync and is determined by the values of external resistors, the recommended slicing level being 30%. Noise protection is provided for the sync separator stage. Separated sync pulses are supplied to the gated phase detector which compare the sync pulses with the sawtooth voltage obtained from the horizontal flyback pulse (pin 5). During catching the gating of the phase detector is switched off and the phase detector output current is increased.

The in-sync or out-of-sync condition is detected with the coincidence detector which is also used for transmitter identification. Sound output is suppressed when no input signal is available. Clamping the voltage on pin 28 to a level of 3,5 V sets the phase detector to a high output current, short time constant mode. This is appropriate for the reception of VCR signals.

Phase detector output voltage levels maintain the horizontal oscillator at its correct operating frequency. The push-pull output (pin 27) has a typical duty cycle of 40%.

Vertical sync pulses are obtained from an internal integrating network with the vertical sawtooth being generated in the vertical oscillator. This sawtooth voltage is compared with the feedback voltage from the deflection coil via pin 3. The comparator generates the drive voltage for the vertical deflection output stage.

The TDA4500 has four supply pins. Pin 7 and pin 10 are for the main positive supply and circuit ground respectively.

Critical circuits are grounded by pin 19. Pin 22 is the supply for the horizontal oscillator. A low current supply (5 mA minimum) can be used to start the oscillator from an external high voltage supply rail.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC134)

Supply voltage	$V_{7-10}, V_{22-10}$	max.	13,2	V
Total power dissipation	$P_{tot}$	max.	1,7	W
Storage temperature range	$T_{stg}$		-25 to +150	°C
Operating ambient temperature range	$T_{amb}$		-25 to +65	°C

**CHARACTERISTICS** $V_{7-10} = 10,5 \text{ V}$ ,  $V_{22-10} = 10,5 \text{ V}$  and  $T_{amb} = 25 \text{ °C}$  unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
Supply voltage	$V_{7-10}$	9,5	10,5	13,2	V
Supply current	$I_7$	—	75	—	mA
Supply voltage (horizontal oscillator)	$V_{22-10}$	9,5	10,5	13,2	V
Supply current (horizontal oscillator, note 1)	$I_{22}$	—	4,5	—	mA
Power dissipation	$P_{tot}$	—	850	—	mW
<b>Vision i.f. amplifier (pin 8)</b>					
Input sensitivity (onset of a.g.c.) at 39,5 MHz (note 2)	$V_{i(rms)}$	—	70	—	$\mu\text{V}$
Differential input resistance (note 3)	$R_i$	—	800	—	$\Omega$
Differential input capacitance (note 3)	$C_i$	—	6	—	pF
Gain control range	$\Delta G$	—	56	—	dB
Output signal expansion for 50 dB input signal variation (note 4)	$\Delta V_o$	—	1	—	dB
Maximum input signal	$V_{i \max}$	—	50	—	mV
<b>Video amplifier (note 5)</b>					
Zero signal output level (note 6)	$V_{16-10}$	—	5	—	V
Top sync output level (note 7)	$V_{16-10}$	1,2	1,4	1,6	V
Video output signal amplitude (peak-to-peak value)	$V_{16-10(p-p)}$	2,75	3,0	3,25	V
Internal bias current of n-p-n emitter follower output transistor	$I_B$	1,4	2,0	—	mA
Bandwidth of demodulated output signal	B	5	6	—	MHz
Video non-linearity (note 8)		—	—	10	%

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Tuner a.g.c.</b>					
Take-over voltage (pin 4) for positive-going tuner a.g.c. (n-p-n tuner)	$V_{4-10}$	—	3,5	—	V
Take-over voltage (pin 4) for negative-going tuner a.g.c. (p-n-p tuner)	$V_{4-10}$	—	8	—	V
Maximum tuner a.g.c. output swing	$I_6 \text{ max}$	2	3	—	mA
Output saturation voltage at $I_6 = 2 \text{ mA}$	$V_{6-10(\text{sat})}$	—	—	300	mV
Leakage current	$I_6$	—	—	1	$\mu\text{A}$
<b>A.F.C. circuit (note 9)</b>					
A.F.C. output voltage swing	$V_{17-19}$	9	—	10	V
Available output current	$\pm I_{17}$	—	1	—	mA
Output voltage at nominal tuning of the reference tuned circuit	$V_{17-19}$	—	5,25	—	V
<b>Sound circuit</b>					
Input limiting voltage when $V_O = V_{O\text{max}} - 3 \text{ dB}$ (note 10)	$V_{14 \text{ lim}}$	—	400	—	$\mu\text{V}$
Input resistance at pin 15 (note 11)	$R_i$	—	3	—	$\text{k}\Omega$
A.F. output signal at pin 12 (note 12) (r.m.s. value)	$V_{12-10(\text{rms})}$	170	—	240	mV
<b>Volume control (pin 11) (Fig. 3)</b>					
Voltage with pin 11 disconnected	$V_{11-10}$	—	6,5	—	V
Current pin 11 short-circuited to ground	$I_{11}$	—	1	—	mA
Volume control characteristic (note 13)			See Fig. 3		
Value of external control resistor	$R_{11-10}$	—	5	—	$\text{k}\Omega$

parameter	symbol	min.	typ.	max.	unit
<b>Horizontal synchronization circuit</b>					
Slicing level sync separator (note 14)		—	30	—	%
Holding range PLL		—	±1000	—	Hz
Catching range PLL		—	±600	—	Hz
Control sensitivity video to flyback (note 15)		—	2	—	kHz/μs
<b>Horizontal oscillator</b>					
Free running frequency	$f_{osc}$	—	15625	—	Hz
Spread with fixed external components	$\Delta f_{osc}$	—	—	4	%
Frequency variations due to supply voltage changes (note 16)	$\Delta f_{osc}/\Delta V$	—	0	—	%
Frequency variation with temperature	$\Delta f_{osc}/\Delta T$	—	—	$1 \times 10^{-4}$	K <sup>-1</sup>
Maximum frequency shift	$\Delta f_{osc}$	—	—	10	%
Maximum frequency deviation between starting point output and nominal condition	$\Delta f_{osc}$	—	—	10	%
<b>Horizontal (push-pull) output</b>					
Output current	$I_{27}$	10	—	—	mA
Output impedance	$R_{27-10}$	—	200	—	Ω
Voltage when $I_{27} = 10$ mA	$V_{27-10}$	—	2	—	V
	$V_{27-22}$	—	3	—	V
Duty cycle of output pulse (note 17)	$\delta$	0,35	0,40	0,45	
<b>Flyback input (note 18)</b>					
Minimum required input amplitude (peak-to-peak value)	$V_{5-10(p-p)}$	—	4	—	V
Phase detector switching voltage		—	0	—	V

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Coincidence detector (mute) (note 19)</b>					
Voltage in synchronized condition	$V_{28-19}$	—	9,5	—	V
Voltage in non-synchronized condition (no-signal)	$V_{28-19}$	—	1,0	1,5	V
Switching level to switch phase detector from slow to fast	$V_{28-19}$	4,5	5,0	5,5	V
Switching level to activate the 'mute' function (transmitter identification)	$V_{28-19}$	2,25	2,5	2,75	V
Output current; in-sync (peak-to-peak value)	$I_{28(p-p)}$	—	1	—	mA
<b>Vertical oscillator</b>					
Free running frequency	$f_{osc}$	—	47,5	—	Hz
Spread with fixed external components	$\Delta f_{osc}$	—	—	4	%
Holding range at nominal frequency		52,5	—	—	Hz
Temperature coefficient	TC	—	$1 \times 10^{-4}$	—	$K^{-1}$
Frequency shift due to a supply voltage change from 9,5 to 12 V	$\Delta f_{osc}/\Delta V$	—	5	—	%
<b>Vertical output (pin 2)</b>					
Output current	$I_2$	1	1,3	—	mA
Output resistance	$R_{2-10}$	—	2	—	$k\Omega$
<b>Feedback input (pin 3)</b>					
D.C. input voltage	$V_{3-10}$	4,75	5	5,25	V
A.C. input voltage (peak-to-peak value)	$V_{3-10(p-p)}$	—	1,2	—	V
Input current	$I_3$	—	—	10	$\mu A$
Non-linearity of deflection current at $V_p = 10,5$ V		—	—	2,5	%

## Notes to characteristics

1. It is possible to start the horizontal oscillator by supplying a current of 5 mA which can be taken from the mains rectifier, to pin 22. The main supply (pin 7) can then be derived from the horizontal output stage.
2. I.F. input voltage (r.m.s.) — value at top sync level at which the video amplitude has dropped 0,5 dB compared with the amplitude at an input signal of 10 mV.
3. The input impedance has been chosen such that a SAW-filter can be applied. 800  $\Omega$  is an acceptable compromise between the requirements for triple transient suppression and power loss.
4. Measured with 0 dB = 150  $\mu$ V.
5. Measured at 10 mV(r.m.s.) top sync input signal.
6. With switched demodulator.
7. Signal with negative-going sync with top white being 10% of the top sync amplitude (Fig. 2).
8. This figure is valid for the complete video signal amplitude (peak-white to top sync).
9. Measured with an input signal ( $V_{g-g}$ ) of 10 mV(r.m.s.); the a.f.c. output (pin 7) loaded with  $2 \times 100 \text{ k}\Omega$  between the supply and ground. The Q factor of the reference tuned circuit is 50.
10. Voltage at pin 15 is the r.m.s. value.  $Q_L$  of the demodulator tuned circuit is 20. Audio frequency is 1 kHz and the carrier frequency is 5,5 MHz.
11. Measured with an input signal of 1 mV(r.m.s.)
12. The tuned demodulator circuit must give an output level equal to that given in the "mute" condition.
13. Volume can be controlled using a variable resistor connected to ground (nominal 5 k $\Omega$ ) or by means of a variable d.c. voltage. In this latter case the rather low impedance at pin 11 must be taken into account.

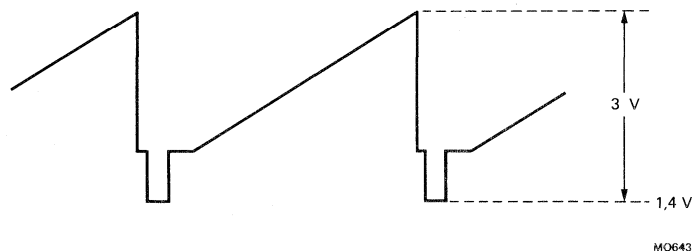


Fig. 2 Video output signal.

**Notes to characteristics (continued)**

14. The sync separator is noise gated. The slicing level is referred to top sync level and is independent of the video information. The value given is a percentage of the sync pulse amplitude. The slicing depends on the values of external resistors connected to pin 26.
15. Phase detector current increases by a factor of 7 during "catching" and when phase detector operates in the 'FAST' mode (pin 28). This ensures a high catching range and a higher dynamic loop gain.
16. Supply voltage variation in the range 8 to 12 V.
17. The negative-going edge of this pulse initiates the switch-off of the horizontal output transistor (simultaneous driver).
18. The circuit requires an integrated flyback pulse. The gate pulses for a.g.c. and the coincidence detector are obtained from the sawtooth.
19. The functions of in-sync/out-of-sync and transmitter identification have been combined on pin 28. For reception of VCR-signals the voltage on this pin must be fixed between 3 V and 4,5 V so that the time constant is fast and the sound is still available.

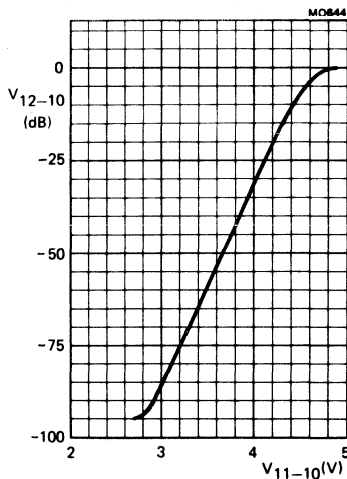


Fig. 3 Volume control characteristic  
at  $f = 1$  kHz.

APPLICATION INFORMATION

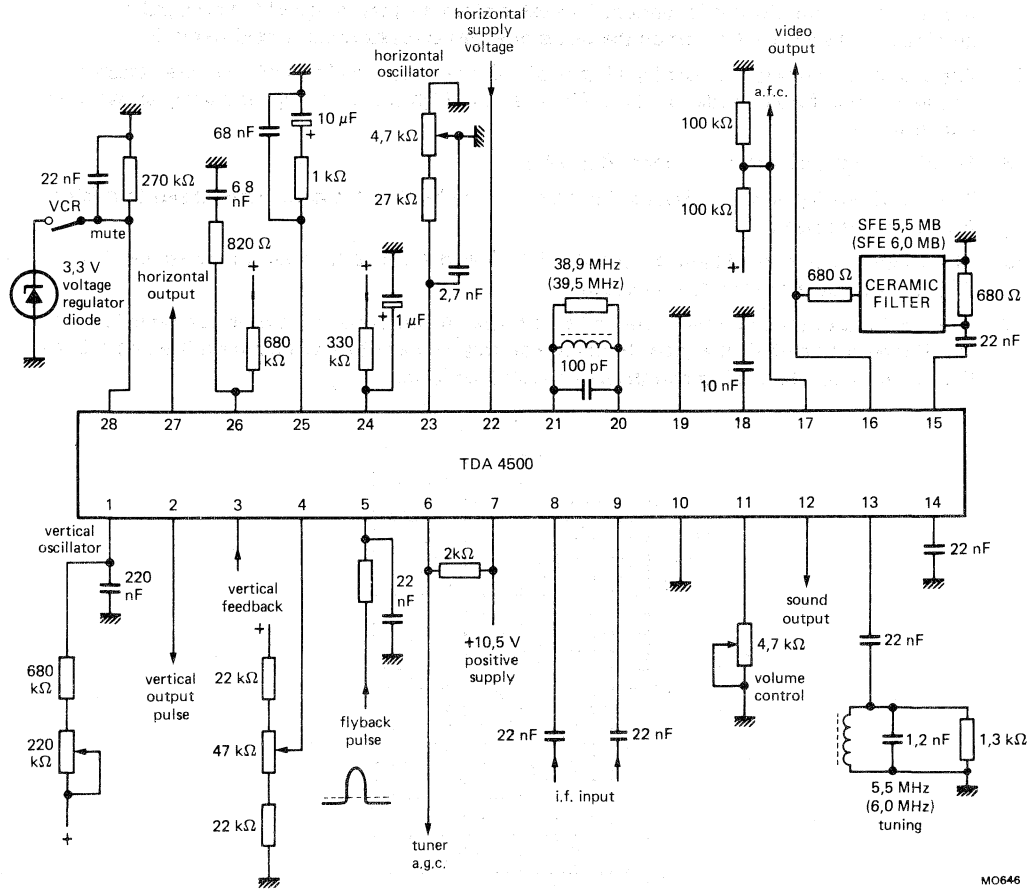


Fig. 4 Typical application circuit.

MO646





## SMALL SIGNAL COMBINATION IC FOR COLOUR TV

## GENERAL DESCRIPTION

The integration into a single package of all small-signal functions required for colour tv reception is achieved in the TDA4501. The only additional circuits needed to complete the receiver are a tuner, the deflection output stages and a colour decoder.

The IC includes a vision IF amplifier with synchronous demodulator and AFC circuit; an AGC detector with tuner output; an integral three-level sandcastle pulse generator; and fully synchronized vertical and horizontal drive outputs. A triggered vertical divider automatically adapts to 50 or 60 Hz working and eliminates the need for an external vertical frequency control.

Signal-strength dependent time-constant switches in the horizontal phase detector make external VCR switching unnecessary.

Sound signals are demodulated and amplified within the IC in a circuit which includes volume control and muting.

## Features

- Vision IF amplifier with synchronous demodulator
- AGC detector for negative modulation
- AGC output to tuner
- AFC circuit
- Video and audio preamplifiers
- Sound IF amplifier and demodulator
- Choice of sound volume control or horizontal oscillator starting function
- Horizontal synchronization circuit with two control loops
- Triggered divider system for vertical synchronization and sawtooth generation giving automatic amplitude adjustment for 50 or 60 Hz working
- Transmitter identification circuit with mute output
- Sandcastle pulse generator

## QUICK REFERENCE DATA

Supply voltage	V <sub>7-6</sub>	typ.	10,5 V
Supply voltage	V <sub>11-6</sub>	typ.	10,5 V
Operating ambient temperature range	T <sub>amb</sub>	-25 to + 65	°C
Storage temperature	T <sub>stg</sub>	-25 to + 150	°C
Power dissipation	P <sub>tot</sub>	max.	1,7 W

## PACKAGE OUTLINE

28-lead DIL; plastic (with internal heat spreader) (SOT-117).

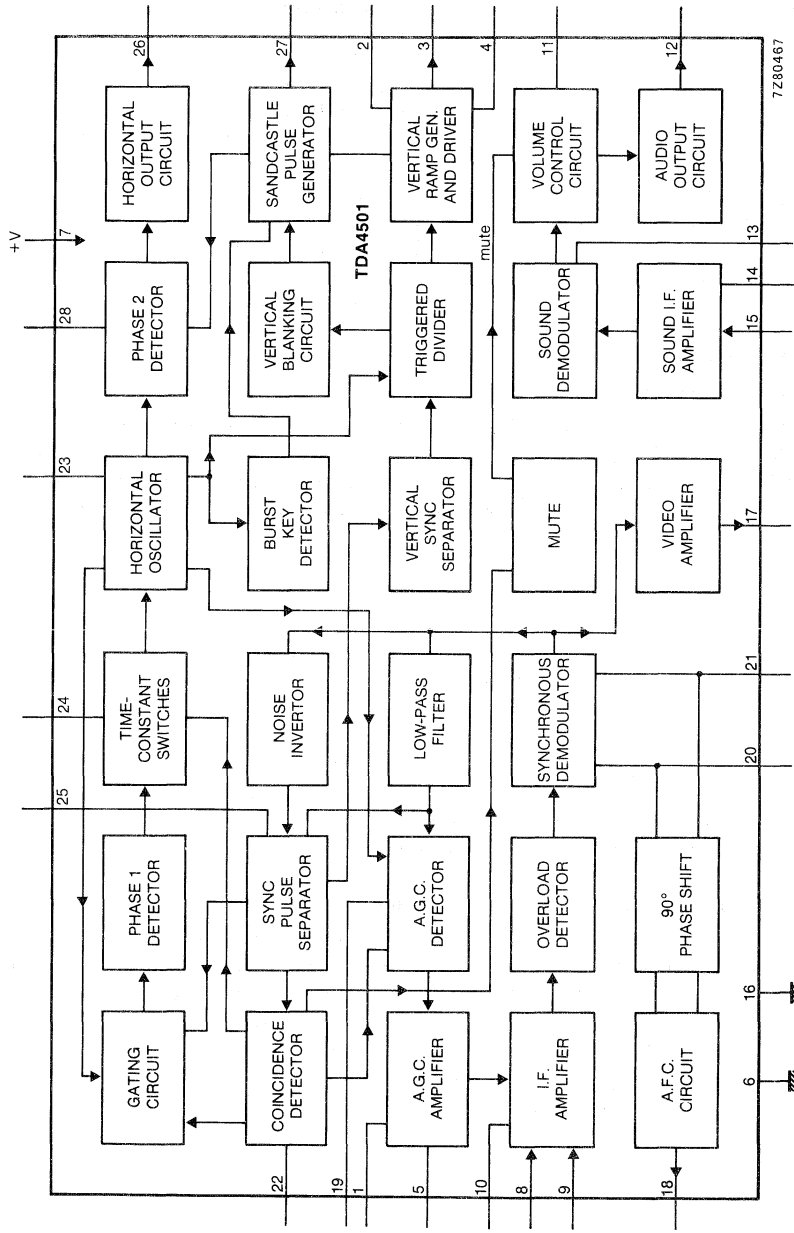


Fig. 1 Block diagram.

**PINNING**

- |                                    |                                     |
|------------------------------------|-------------------------------------|
| 1. AGC take over                   | 15. Sound IF input                  |
| 2. Ramp generator                  | 16. Ground                          |
| 3. Vertical drive                  | 17. Video output                    |
| 4. Vertical feedback               | 18. AFC                             |
| 5. Tuner AGC                       | 19. AGC detection                   |
| 6. Ground                          | 20. Sync demodulator                |
| 7. Supply                          | 21. Sync demodulator                |
| 8. IF input                        | 22. Coincidence detector decoupling |
| 9. IF input                        | 23. Horizontal oscillator           |
| 10. Decoupling capacitor           | 24. Frequency control               |
| 11. Volume control/start Hor. osc. | 25. Sync separator                  |
| 12. Audio output                   | 26. Horizontal drive                |
| 13. Sound demodulator              | 27. Sandcastle out/flyback in       |
| 14. Sound IF decoupling            | 28. Phase detection                 |

**FUNCTIONAL DESCRIPTION****IF amplifier, demodulator and AFC**

The IF amplifier has a symmetrical input (pins 8 and 9), the input impedance of which is suitable for SAW-filtering to be used. The synchronous demodulator and the AFC circuit share an external reference tuned circuit (pins 20 and 21). An internal RC-network provides the necessary phase-shifting for AFC operation. The AFC circuit provides a control voltage output with a swing greater than 9 V from pin 18.

**AGC circuit**

Gating of the AGC detector is performed to reduce sensitivity of the IF amplifier to external electrical noise. The AGC time constant is provided by an RC-circuit connected to pin 19. Tuner AGC voltage is supplied from pin 5 and is suitable for tuners with p-n-p or n-p-n RF stages. The sense of the AGC (to increase in a positive or negative direction) and the point of tuner take-over are preset by the voltage level at pin 1.

**Video amplifier**

The signal through the video amplifier comprises video and sound information, therefore no gating of the video amplifier is performed during flyback periods.

**Sound circuit and horizontal oscillator starting function**

The input to the sound IF amplifier is obtained by a bandpass filter coupling from the video output (pin 17). The sound is demodulated and passed via a dual-function volume control stage to the audio output amplifier. The volume control function is obtained by connecting a variable resistor (10 k $\Omega$ ) between pin 11 and ground, or by supplying pin 11 with a variable voltage. Sound output is suppressed by an internal mute signal when no input signal is present.

The horizontal oscillator starting function is obtained by supplying pin 11 with a current of 6 mA during the switching-on period. The IC then uses this current to generate drive pulses for the horizontal deflection. For this application, the main supply voltage for the IC can be obtained from the horizontal deflection circuit.

**FUNCTIONAL DESCRIPTION** (continued)**Vertical divider system**

A triggered divider system is used to synchronize the vertical drive waveforms, adjusting automatically to 50 or 60 Hz working. A large window (search window) is opened between counts of 488 and 722; when a separated vertical sync pulse occurs before count 576, the system works in the 60 Hz mode, otherwise 50 Hz working is chosen.

A narrow window is opened when 15 approved sync pulses have been detected. Divider ratio between 522 and 528 switches to 60 Hz mode; between 622 and 628 switches to 50 Hz mode.

The vertical blanking pulse is also generated via the divider system by adding the anti-topflutter pulse and the blanking pulse.

**Line phase detector**

The circuit has three operating conditions:

- a. Strong input signal and synchronized.
- b. Weak signal and synchronized.
- c. Non synchronized (weak and strong) signal.

The input signal condition is obtained from the AGC circuit.

**D.C. volume control/horizontal oscillator start**

The operation depends on the application. When during switch-on no current is supplied pin 11 will act as volume control. When a current of 6 mA is applied the volume control is set to maximum and the circuit will generate drive pulses for the horizontal deflection.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 7)	$V_P = V_{7-6}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Operating ambient temperature range	$T_{amb}$	–25 to + 65	°C
Storage temperature range	$T_{stg}$	–25 to + 150	°C

## CHARACTERISTICS

 $V_P = V_{7-6} = 10,5 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; unless otherwise specified

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Supplies</b>					
Supply voltage (pin 7)	$V_{7-6}$	9,5	10,5	13,2	V
Supply current (pin 7)	$I_7$	—	120	—	mA
Supply voltage (pin 11)	$V_{11-6}$	—	10,5	—	V
Supply current (pin 11) for horizontal oscillator start	$I_{11}$	—	6	—	mA
<b>Vision IF amplifier (pins 8 and 9)</b>					
Input sensitivity at 38,9 MHz (note 1)	$V_{8-9}$	40	70	120	$\mu\text{V}$
Input sensitivity at 45,75 MHz (note 1)	$V_{8-9}$	—	90	—	$\mu\text{V}$
Differential input resistance (pin 8 to 9)	$R_{8-9}$	—	1,3	—	$\text{k}\Omega$
Differential input capacitance (pin 8 to 9)	$C_{8-9}$	—	5	—	pF
AGC range		—	60	—	dB
Maximum input signal	$V_{8-9}$	50	70	—	mV
Expansion of output signal for 50 dB variation of input signal with $V_{8-9}$ at 150 $\mu\text{V}$ (0 dB)	$\Delta V_{17-6}$	—	1	—	dB
<b>Video amplifier</b>					
Output level for zero signal input (zero point of switched demodulator)	$V_{17-6}$	—	4,5	—	V
Output signal top sync level (note 2)	$V_{17-6}$	—	1,4	—	V
Amplitude of video output signal (peak-to-peak value)	$V_{17-6(p-p)}$	—	2,8	—	V
Internal bias current of output transistor (n-p-n emitter follower)	$I_{17(\text{int})}$	1,4	2,0	—	mA
Bandwidth of demodulated output signal	B	—	6	—	MHz
Differential gain (Fig. 4)	$G_{17}$	—	6	—	%
Differential phase (Fig. 4)		—	4	—	%
Video non-linearity complete video signal amplitude		—	—	10	%
Intermodulation (Fig. 5) at gain control = 45 dB					
f = 1,1 MHz; blue;		55	60	—	dB
f = 1,1 MHz; yellow;		50	54	—	dB
f = 3,3 MHz; blue;		60	66	—	dB
f = 3,3 MHz; yellow		55	59	—	dB

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Video amplifier (continued)</b>					
Signal to noise ratio (note 3) $Z_S = 75 \Omega$ $V_i = 10 \text{ mV}$	S/N	50	54	—	dB
end of gain control range	S/N	50	56	—	dB
Residual carrier signal		—	7	30	mV
Residual 2nd harmonic of carrier signal		—	3	30	mV
<b>Tuner AGC *</b>					
Take-over voltage (pin 1 for positive-going tuner AGC (NPN tuner))	$V_{1-6}$	—	3,5	—	V
Starting point take over; $V = 5 \text{ V}$	$V_{1-6(\text{rms})}$	—	0,4	2	mV
Starting point take over; $V = 1,2 \text{ V}$	$V_{1-6(\text{rms})}$	50	70	—	mV
Take-over voltage (pin 1) for negative-going tuner AGC (PNP tuner)	$V_{1-6}$	—	8	—	V
Starting point take over; $V = 9,5 \text{ V}$	$V_{1-6(\text{rms})}$	—	0,3	2	mV
Starting point take over; $V = 5,6 \text{ V}$	$V_{1-6(\text{rms})}$	50	70	—	mV
Maximum output swing	$I_5 \text{ max}$	2	3	—	mA
Output saturation voltage $I = 2 \text{ mA}$	$V_{5-6(\text{sat})}$	—	—	300	mV
Leakage current	$I_5$	—	—	1	$\mu\text{A}$
Input signal variation complete tuner control	$\Delta V_i$	0,5	2	4	dB
<b>AFC circuit (pin 18; note 4)</b>					
AFC output voltage swing	$V_{18-6(\text{p-p})}$	9	—	10	V
Available output current	$\pm I_{18}$	—	1	—	mA
Control steepness					
—100% picture carrier		20	40	80	mV/kHz
—10% picture carrier		—	15	—	mV/kHz
Output voltage at nom. tuning of the reference tuned circuit	$V_{18-6}$	—	5,25	—	V
Output voltage without input signal	$V_{18-6}$	2,7	5,25	8,5	V

\* Starting point tuner take-over NPN current 1,8 mA; PNP tuner  $I = 0,2 \text{ mA}$ .

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Sound circuit</b>					
Input limiting voltage $V_o = V_o \text{ max. } -3 \text{ dB}; Q_L = 16$ $f_{AF} = 1 \text{ kHz}; f_c = 5,5 \text{ MHz}$	V15lim	—	400	—	$\mu\text{V}$
Input resistance $V_{i(\text{rms})} = 1 \text{ mV}$	R15-6	—	2,6	—	$\text{k}\Omega$
Input capacitance $V_{i(\text{rms})} = 1 \text{ mV}$	C15-6	—	6	—	$\text{pF}$
AM rejection (Figs 8 and 9) $V_i = 10 \text{ mV}$ $V_i = 50 \text{ mV}$	AMR AMR	— —	35 43	— —	$\text{dB}$ $\text{dB}$
AF output signal $\Delta f = 7,5 \text{ kHz}; \text{ min. distortion}$	V12-6(rms)	220	320	—	$\text{mV}$
AF output impedance	Z12-6	—	150	—	$\Omega$
Total harmonic distortion $\Delta f = 27,5 \text{ kHz}$	THD	—	1	—	%
Ripple rejection $f_k = 100 \text{ Hz}, \text{ volume control } 20 \text{ dB}$ when muted	RR RR	— —	22 26	— —	$\text{dB}$ $\text{dB}$
Output voltage mute condition	V12-6	—	2,6	—	V
Signal to noise ratio weighted noise (CCIR 468)	S/N	—	47	—	$\text{dB}$
<b>Volume control</b>					
Voltage (pin 11 disconnected)	V11-6	—	4,8	—	V
Current (pin 11 short circuited)	I11	—	1	—	$\text{mA}$
External control resistor	R11-6	—	10	—	$\text{k}\Omega$
Suppression output signal during mute condition		—	66	—	$\text{dB}$
<b>Horizontal synchronization</b>					
Slicing level sync separator		—	30	—	%
Holding range PLL		800	1100	1500	Hz
Catching range PLL		600	1000	—	Hz
Control sensitivity video to oscillator; at weak signal at strong signal during scan during vert. retrace and during catching		— — —	2 3 6	— — —	$\text{kHz}/\mu\text{s}$ $\text{kHz}/\mu\text{s}$ $\text{kHz}/\mu\text{s}$

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Second control loop (positive edge)</b>					
Control sensitivity	$\Delta t_d / \Delta t_o$	—	300	—	$\mu s$
Control range	$t_d$	—	25	—	$\mu s$
Phase adjustment via second control loop; control sensitivity		—	25	—	$\mu A / \mu s$
Maximum allowed phase shift		—	$\pm 2$	—	$\mu s$
<b>Horizontal oscillator (pin 23)</b>					
Free running frequency R = 35 k $\Omega$ ; C = 2,7 nF	$f_{fr}$	—	15625	—	Hz
Spread with fixed external components		—	—	4	%
Frequency variation due to change of supply voltage from 8 to 12 V	$\Delta f_{fr}$	—	0	0,5	%
Frequency variation with temperature	$\Delta f_{fr}$	—	—	$1 \times 10^{-4}$	K <sup>-1</sup>
Maximum frequency shift	$\Delta f_{fr}$	—	—	10	%
Maximum frequency deviation (V <sub>7.6</sub> = 8 V)	$\Delta f_{fr}$	—	—	10	%
<b>Horizontal output (pin 26)</b>					
Output voltage high	V <sub>26-6</sub>	—	—	13,2	V
Output voltage at which protection commences	V <sub>26-6</sub>	—	—	15,8	V
Output voltage low at I <sub>26</sub> = 10 mA	V <sub>26-6</sub>	—	0,3	0,5	V
Duty cycle of horizontal output signal	$\delta_0$	—	45	—	%
Rise and fall times of output pulse	$t_r, t_f$	—	150	—	ns
<b>Flyback input and sandcastle output</b>					
Input current required during flyback pulse	I <sub>27</sub>	0,1	—	2	mA
Output voltage during burst key pulse	V <sub>27-6</sub>	7,5	—	—	V
Output voltage during horizontal blanking	V <sub>27-6</sub>	3,5	4,0	4,5	V
Output voltage during vertical blanking	V <sub>27-6</sub>	1,8	2,2	2,6	V
Width of burst key pulse		3,1	3,5	3,9	$\mu s$
Width of horizontal blanking pulse		flyback pulse width			
Width of vertical blanking pulse					
50 Hz working		—	21	—	lines
60 Hz working		—	17	—	lines
Delay between start of sync pulse at video output and rising edge of burst key pulse		—	5,2	—	$\mu s$



DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Coincidence detector mute output (pin 22)</b>					
Voltage for in-sync condition	V <sub>22-6</sub>	—	9,5	—	V
Voltage for no-sync condition no signal	V <sub>22-6</sub>	—	1,0	1,5	V
Switching level to switch phase detector from slow to fast	V <sub>22-6</sub>	4,9	5,3	5,8	V
Fast-to-slow hysteresis		—	1	—	V
Switching level to activate mute function (transmitter identification)	V <sub>22-6</sub>	2,25	2,5	2,75	V
Output current for in-sync condition (peak-to-peak value)	I <sub>22(p-p)</sub>	0,7	1,0	—	mA
<b>Vertical ramp generator (pin 2)</b>					
Input current during scan	I <sub>2</sub>	—	12	—	μA
Discharge current during retrace	I <sub>2</sub>	—	0,5	—	mA
Minimum voltage	V <sub>2-6</sub>	—	1,5	—	V
<b>Vertical output (pin 3)</b>					
Output current	I <sub>3</sub>	—	—	10	mA
Output impedance	R <sub>3-6</sub>	—	400	—	Ω
<b>Feedback input (pin 4)</b>					
Input voltage					
d.c. component	V <sub>4-6</sub>	—	3	—	V
a.c. component (peak-to-peak value)	V <sub>4-6(p-p)</sub>	—	1,2	—	V
Input current	I <sub>4</sub>	—	—	12	μA
Internal precorrection to sawtooth		—	6	—	%
Deviation amplitude 50/60 Hz		—	—	5	%

**Notes**

1. Typical value taken at starting level of AGC.
2. Signal with negative going sync, maximum white level 10% of the maximum sync amplitude (see Fig. 3).
3. Signal-to-noise ratio equals  $20 \log \frac{V_o(\text{black to white})}{V_{n(\text{rms})}}$  at B = 5 MHz.
4.  $V_{i(\text{rms})} = 10 \text{ mV}$ ; see Fig. 2; Q-factor = 36.

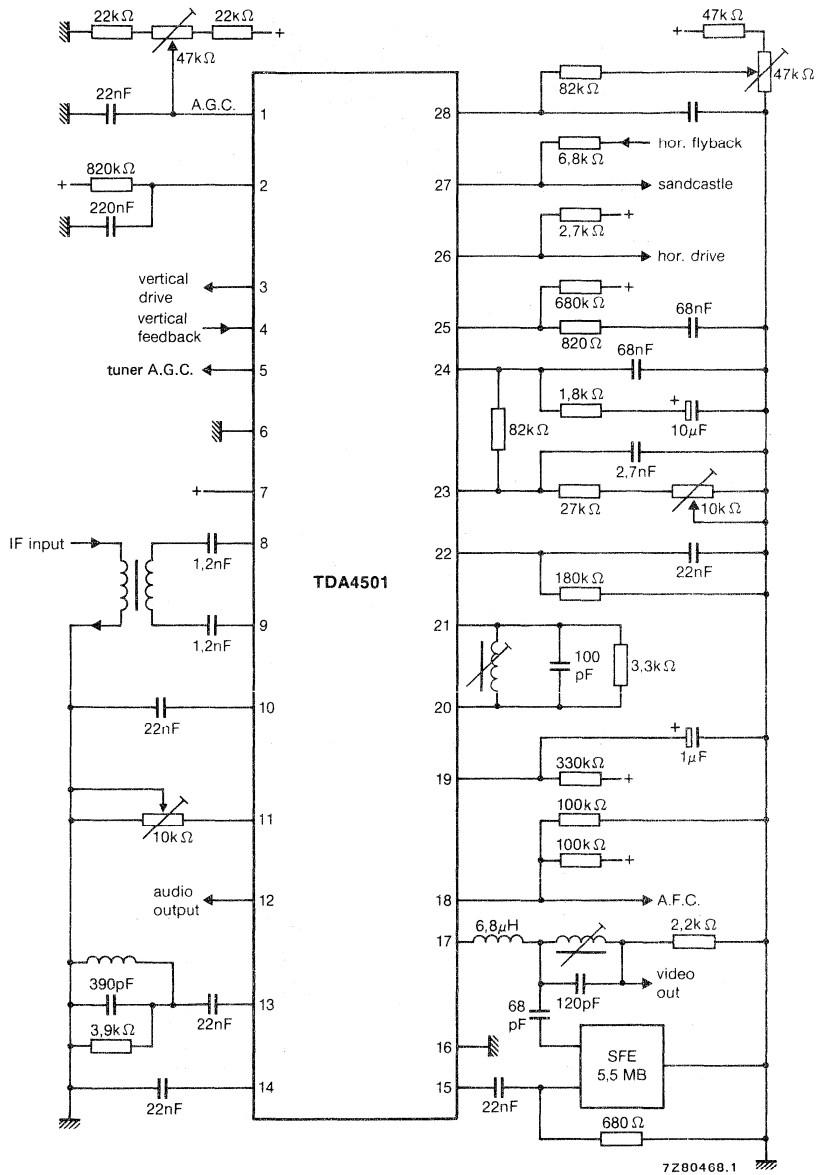


Fig. 2 Application diagram.

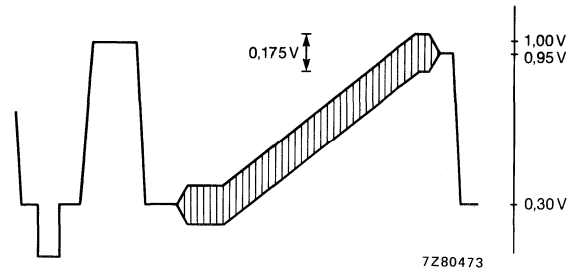


Fig. 3 Video output signal.

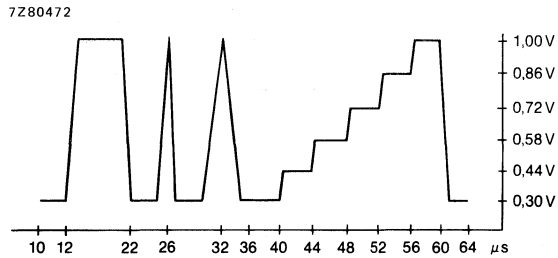


Fig. 4 E.B.U. test signal waveform (line 330).

DEVELOPMENT DATA

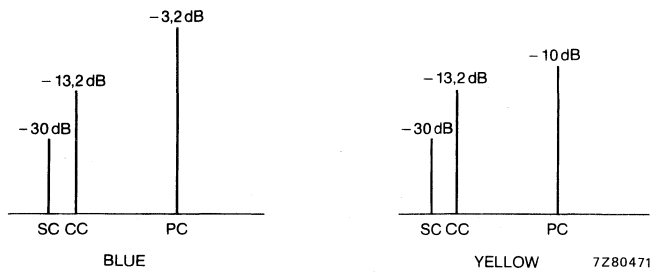


Fig. 5 Input signal conditions.

SC = sound carrier

CC = chrominance carrier

PC = picture carrier

all with respect to top sync level.

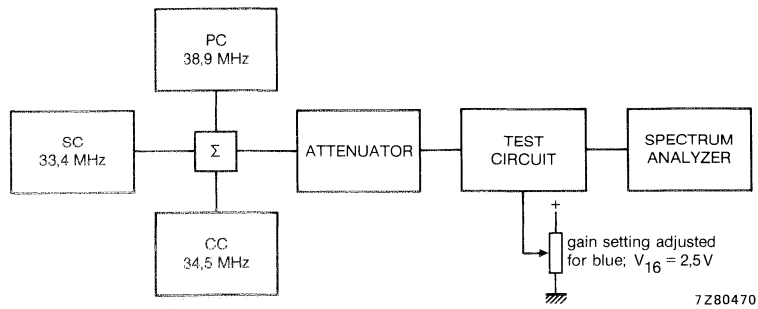


Fig. 6 Test set-up intermodulation.

$$\text{Value at 1,1 MHz: } 20 \log \frac{V_o \text{ at 4,4 MHz}}{V_o \text{ at 1,1 MHz}} + 3,6 \text{ dB}$$

$$\text{Value at 3,3 MHz: } 20 \log \frac{V_o \text{ at 4,4 MHz}}{V_o \text{ at 3,3 MHz}}$$

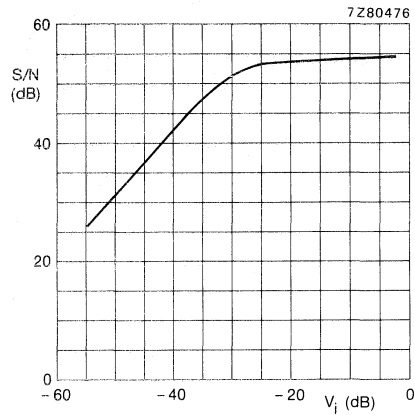


Fig. 7 S/N ratio as a function of the input voltage.

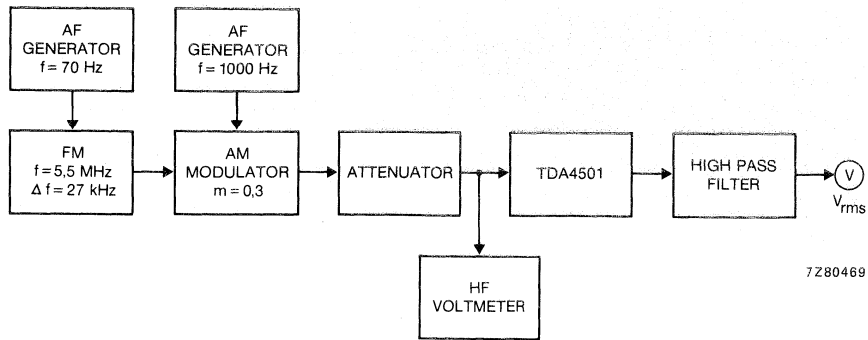


Fig. 8 Test set-up AM suppression.

DEVELOPMENT DATA

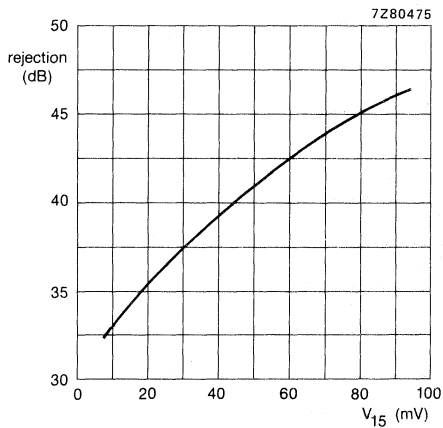


Fig. 9 AM rejection.

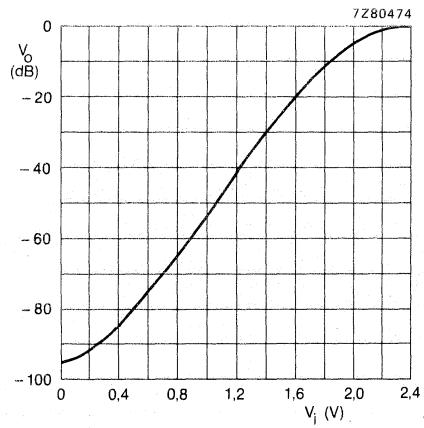


Fig. 10 Volume control characteristics.



## SMALL-SIGNAL COMBINATION IC FOR BLACK-AND-WHITE TV

### GENERAL DESCRIPTION

This IC contains all small-signal functions required for black-and-white tv reception. The only additional circuits needed to complete the receiver are a tuner and the deflection output stages.

The IC includes a vision i.f. amplifier with synchronous demodulator and a.f.c. circuit, an a.g.c. detector with tuner output and fully synchronized vertical and horizontal drive outputs.

Sound signals are demodulated and amplified within the IC in a circuit which includes volume control and internal muting.

The TDA4503 may also be adapted for simple colour tv reception by the use of an external, three-level sandcastle pulse generator.

### Features

- Vision i.f. amplifier with synchronous demodulator
- A.G.C. detector and amplifier with a.g.c. output to tuner
- A.F.C. circuit
- Video preamplifier
- Audio preamplifier
- Sound i.f. amplifier and demodulator
- D.C. volume control
- Horizontal synchronization circuit
- Transmitter identification and mute circuit
- Vertical synchronization circuit and sawtooth generator

### QUICK REFERENCE DATA

Supply voltage (pin 7)	V7-10	typ.	10,5 V
Supply current (pin 7)	I7	typ.	82 mA
Supply voltage (pin 22)	V22-10	typ.	10,5 V
Supply current (pin 22)	I22	typ.	5 mA
Operating ambient temperature range	T <sub>amb</sub>		-25 to + 65 °C
Storage temperature range	T <sub>stg</sub>		-25 to +150 °C
Power dissipation	P <sub>tot</sub>	typ.	920 mW

### PACKAGE OUTLINE

28-lead DIL; plastic (with internal heat spreader) (SOT-117).

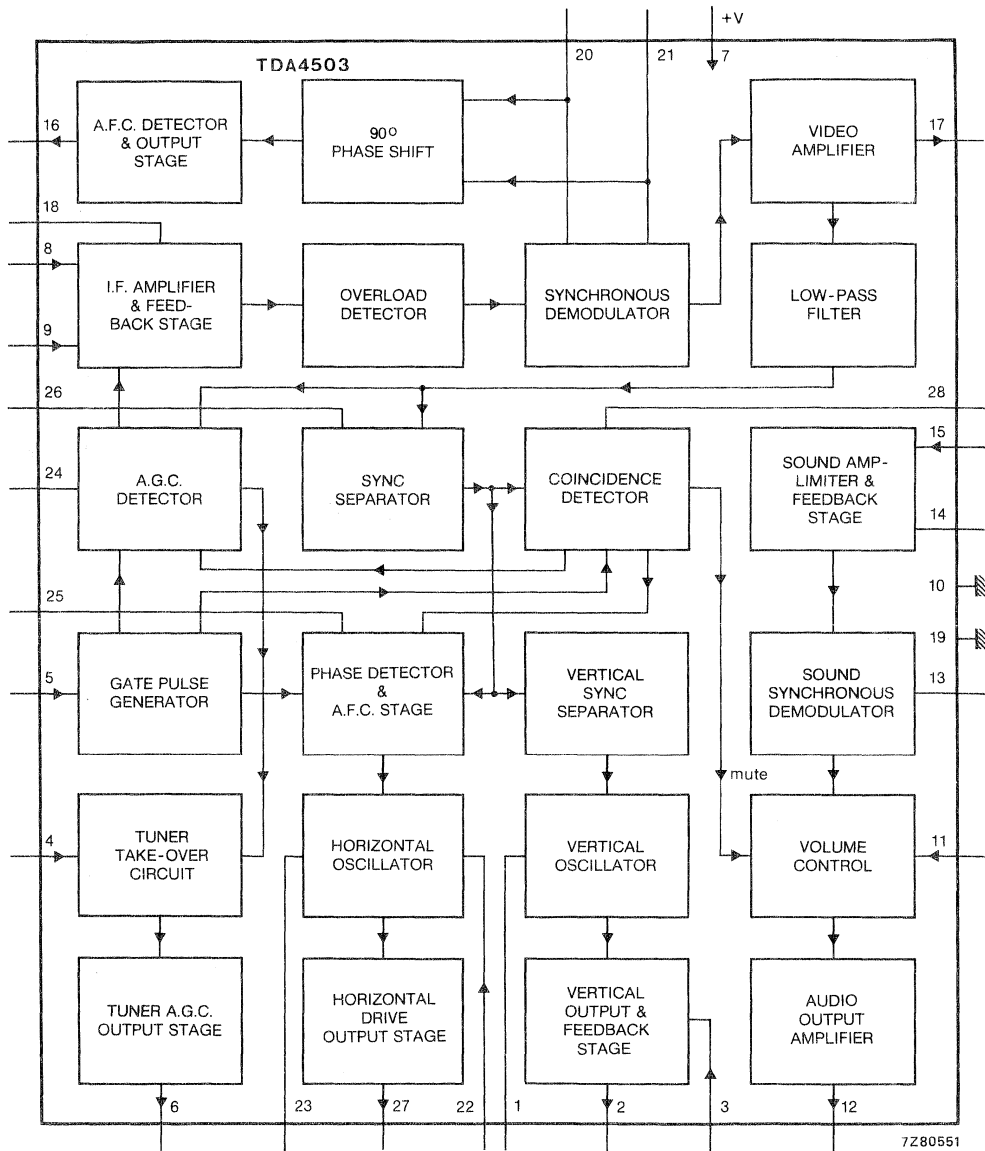


Fig. 1 Block diagram.



**PINNING**

- |                                       |  |
|---------------------------------------|--|
| 1. Vertical oscillator input          | 15. Sound i.f. input                   |
| 2. Vertical drive output              | 16. A.F.C. output                      |
| 3. Vertical drive feedback            | 17. Video output                       |
| 4. Tuner take-over input              | 18. I.F. amplifier decoupling          |
| 5. Flyback pulse input                | 19. Ground (for critical circuits)     |
| 6. A.G.C. output to tuner             | 20. Synchronous demodulator            |
| 7. Power supply input                 | 21. Synchronous demodulator            |
| 8. I.F. input                         | 22. Horizontal oscillator start input  |
| 9. I.F. input                         | 23. Horizontal oscillator              |
| 10. Power supply return (ground)      | 24. A.G.C. time constant               |
| 11. Volume control                    | 25. Horizontal phase detector filter   |
| 12. Audio output                      | 26. Sync separator slicing level       |
| 13. Sound demodulator reference input | 27. Horizontal drive output            |
| 14. Sound i.f. decoupling             | 28. Coincidence detector time constant |

**FUNCTIONAL DESCRIPTION****I.F. amplifier, demodulator and A.F.C.**

The i.f. amplifier operates with symmetrical inputs at pins 8 and 9 and has an input impedance suitable for SAW filter application. The amplifier sensitivity gives a peak-to-peak output voltage of 3 V for an r.m.s. input of 70  $\mu$ V. The demodulator and the a.f.c. circuit share an external reference tuned circuit (pins 20 and 21) and an internal RC-network provides the phase-shifting necessary for a.f.c. operation. The a.f.c. circuit provides a control voltage output with a (typical) swing of 9 V from pin 16 ( $V_p = 10,5$  V).

**A.G.C. circuit**

Gating of the a.g.c. detector is performed to reduce sensitivity of the i.f. amplifier to external electrical noise. The a.g.c. time constant is provided by an RC-network connected to pin 24. The typical gain control range of the i.f. amplifier is 60 dB. Tuner a.g.c. voltage is supplied from pin 6 and is suitable for tuners with pnp or npn RF stages. The sense of the AGC (to increase in a positive or negative direction) and the point of tuner take-over are preset by the voltage level at pin 4 ( $V_4 = 3,5$  V (typ) for positive a.g.c.;  $V_4 = 8$  V (typ) for negative a.g.c.).

**Video amplifier**

The video signal output from pin 17 has a peak-to-peak value of 3 V (top sync level = 1,5 V) and carries negative-going sync. In order to retain sound information at pin 17, the video signal is not blanked during flyback periods.

**Sound circuit**

The sound i.f. signal present at the video output (pin 17) is coupled to the sound circuit by a band-pass filter to pin 15. The sound circuit has an amplifier-limiter stage, a synchronous demodulator with reference tuned circuit at pin 13, a volume control stage and an output amplifier. The volume control has a range of approximately 80 dB and the audio output signal at maximum volume and with  $\Delta f = 7,5$  kHz is 320 mV (r.m.s. value). The sound output signal is suppressed when no input signal is detected.

**Synchronization circuits**

The sync separator slicing level is determined by an external resistor network at pin 26. The slicing level is referred to the top sync level and the recommended value for slicing is 30%. Internal protection from electrical noise is included.

A gated phase detector compares the phase of the separated sync pulses with a sawtooth waveform obtained from the flyback pulse at pin 5. In-sync and out-of-sync conditions are detected by the coincidence detector at pin 28 (this circuit also gives transmitter identification). During the out-of-sync condition, gating of the phase detector is switched off and the output current from the phase detector increases to give the detector a short time-constant and thus a fast response. This condition can be imposed by clamping the voltage at pin 28 to 3,5 V for the reception of VCR signals.

The horizontal oscillator frequency is controlled by the output voltage of the phase detector circuit. The horizontal drive output from pin 27 has a duty factor of 40%.

Vertical sync pulses are separated by an internal integrating network and are used to trigger the vertical oscillator. A comparator circuit compares the vertical sawtooth waveform, generated by the vertical oscillator, with feedback from the deflection coils and supplies the drive voltage for the output stage at pin 2.

**Power supplies**

The main supply is to pin 7 (positive supply) and pin 10 (ground). The horizontal oscillator is supplied from pin 22 to facilitate starting of the oscillator from a high-voltage rail. A special ground connection at pin 19 is used by critical voltage dividers in the feedback loops of the vision and sound i.f. circuits.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 7)	$V_p = V_{7-10}$	max.	13,2 V
Total power dissipation	$P_{tot}$	max.	1,7 W
Operating ambient temperature range	$T_{amb}$		-25 to + 65 °C
Storage temperature range	$T_{stg}$		-25 to +150 °C

**CHARACTERISTICS** $V_{7-10} = 10,5 \text{ V}$ ;  $V_{22-10} = 10,5 \text{ V}$ ;  $T_{amb} = 25 \text{ °C}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supplies</b>					
Supply voltage (pin 7)	$V_{7-10}$	9,5	10,5	13,2	V
Supply current (pin 7)	$I_7$	—	82	100	mA
Supply voltage (pin 22)	$V_{22-10}$	9,5	10,5	13,2	V
Supply current (pin 22) (note 1)	$I_{22}$	—	5	6,5	mA
Total power dissipation	$P_{tot}$	—	920	1150	mW
<b>Vision i.f. amplifier (pins 8 and 9)</b>					
Input sensitivity at 38,9 MHz (note 2)	$V_{8-9}$	40	80	120	$\mu\text{V}$
Input sensitivity at 45,75 MHz (note 2)	$V_{8-9}$	—	90	—	$\mu\text{V}$
Differential input resistance (pin 8 to 9)	$R_{8-9}$	—	1,3	—	$\text{k}\Omega$
Differential input capacitance (pin 8 to 9)	$C_{8-9}$	—	5	—	pF
A.G.C. range		—	59	—	dB
Maximum input signal	$V_{8-9}$	50	70	—	mV
Expansion of output signal (pin 17) for 50 dB variation of input signal (pins 8 and 9) (note 3)	$\Delta V_{17-10}$	—	0,5	1,0	dB
<b>Video amplifier (note 4)</b>					
Output level for zero signal input (zero point of switched demodulator)	$V_{17-10}$	4,2	4,5	4,8	V
Output signal top sync level (note 5)	$V_{17-10}$	1,25	1,45	1,65	V

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
Amplitude of video output signal (peak-to-peak value)	V <sub>17-10(p-p)</sub>	2,4	2,7	3,0	V
Internal bias current of output transistor (npn emitter follower)	I <sub>17(int)</sub>	1,4	2,0	—	mA
Bandwidth of demodulated output signal	B	—	5	—	MHz
Differential gain (Fig. 4 and note 6)	G <sub>17</sub>	—	6	—	%
Differential phase (Fig. 4 and note 6)		—	4	—	%
Video non-linearity over total video amplitude (peak white to black)		—	—	10	%
Intermodulation (Figs 5 and 6) at gain control = 45 dB					
f = 1,1 MHz; blue;		55	60	—	dB
f = 1,1 MHz; yellow;		50	54	—	dB
f = 3,3 MHz; blue;		60	66	—	dB
f = 3,3 MHz; yellow;		55	59	—	dB
Signal-to-noise ratio (note 7) at V <sub>i</sub> = 10 mV	S/N	50	54	—	dB
at end of a.g.c. range as a function of input signal	S/N	50	56	—	dB
		see Fig. 7			
Residual A.M. of intercarrier output signal (note 8)		—	5	10	%
Residual carrier signal		—	7	30	mV
Residual 2nd harmonic of carrier signal		—	3	30	mV
<b>Tuner a.g.c. (note 9)</b>					
Take-over voltage (pin 4) for positive-going tuner a.g.c. (NPN tuner)	V <sub>4-10</sub>	—	3,5	—	V
Starting point take-over at V <sub>4-10</sub> = 5 V (r.m.s. value)	V <sub>8-9(rms)</sub>	—	0,4	2,0	mV
Starting point take-over at V <sub>4-10</sub> = 1,2 V (r.m.s. value)	V <sub>8-9(rms)</sub>	50	70	—	mV
Take-over voltage (pin 1) for negative-going tuner a.g.c. (PNP tuner)	V <sub>4-10</sub>	—	8	—	V
Starting point take over at V <sub>4-10</sub> = 9,5 V (r.m.s. value)	V <sub>8-9(rms)</sub>	—	0,3	2,0	mV
Starting point take over at V <sub>4-10</sub> = 5,6 V (r.m.s. value)	V <sub>8-9(rms)</sub>	50	70	—	mV
Maximum tuner a.g.c. output swing	I <sub>6max</sub>	2	3	—	mA
Output saturation voltage at I <sub>6</sub> = 2 mA	V <sub>6-10(sat)</sub>	—	—	300	mV
Leakage current at pin 6	I <sub>6</sub>	—	—	1	μA
Input signal variation required for complete tuner control	ΔV <sub>8-9</sub>	0,5	2	4	dB

parameter	symbol	min.	typ.	max.	unit
<b>A.F.C. circuit (pin 16; note 10)</b>					
A.F.C. output voltage swing (peak-to-peak value)	$V_{16-10(p-p)}$	9	—	10	V
Available output current	$\pm I_{16}$	—	1	—	mA
Control steepness at 100% picture carrier		20	40	80	mV/kHz
10% picture carrier		—	15	—	mV/kHz
Output voltage at nominal tuning of the reference tuned circuit	$V_{16-10}$	—	5,25	—	V
Output voltage without input signal	$V_{16-10}$	2,7	6,0	8,5	V
<b>Sound circuit</b>					
Input limiting voltage (note 11) (r.m.s. value) at $V_O = V_{O \max} - 3$ dB	$V_{15 \text{ lim}}$	—	2	—	mV
Input resistance at $V_i(\text{rms}) = 1$ mV	$R_{15-10}$	—	2,6	—	k $\Omega$
input capacitance at $V_i(\text{rms}) = 1$ mV	$C_{15-10}$	—	6	—	pF
A.M. rejection (Figs 8 and 9) at $V_i = 10$ mV	AMR	—	35	—	dB
$V_i = 50$ mV	AMR	—	43	—	dB
A.F. output signal (note 12) (r.m.s. value)	$V_{12-6(\text{rms})}$	220	320	—	mV
A.F. output impedance	$Z_{12-10}$	—	150	—	$\Omega$
Total harmonic distortion (note 12)	THD	—	1	—	%
Ripple rejection at $f_k = 100$ Hz, volume control 20 dB when muted	RR	—	22	—	dB
	RR	—	26	—	dB
Output voltage in mute condition	$V_{12-10}$	—	2,6	—	V
Signal-to-noise ratio; weighted noise (CCIR 468)	S/N	—	47	—	dB
<b>Volume control</b>					
Voltage (pin 11 disconnected)	$V_{11-10}$	—	6,9	—	V
Current (pin 11 connected to ground)	$I_{11}$	—	1	—	mA
External control resistor (note 13)	$R_{11-10}$	—	5	—	k $\Omega$
Suppression of output signal during mute condition		—	66	—	dB

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Horizontal synchronization</b>					
Slicing level sync separator (note 14)		—	30	—	%
Phase-lock loop holding range		±800	±1100	±1500	Hz
Phase-lock loop catching range		±600	1000	—	Hz
Control sensitivity video to flyback (note 15)		—	2,3	—	kHz/μs
Delay between leading edge of sync pulse and zero cross-over of sawtooth (pin 5)		—	3	—	μs
<b>Horizontal oscillator (pin 23)</b>					
Free-running frequency R = 35 kΩ; C = 2,7 nF	f <sub>fr</sub>	—	15625	—	Hz
Spread with fixed external components		—	—	4	%
Frequency variation due to change of supply voltage from 8 to 12 V	Δf <sub>fr</sub>	—	0	0,5	%
Temperature coefficient	TC	—	—	1×10 <sup>-4</sup>	K <sup>-1</sup>
Maximum frequency shift	Δf <sub>fr</sub>	—	—	10	%
Maximum frequency deviation (V <sub>7-10</sub> = 8 V)	Δf <sub>fr</sub>	—	—	10	%
<b>Horizontal output (pin 27)</b>					
Output current	I <sub>27</sub>	5	—	—	mA
Output impedance	R <sub>27</sub>	—	200	—	Ω
Output voltage at I <sub>27</sub> = 5 mA	V <sub>27-10</sub>	—	1,4	—	V
	V <sub>27-22</sub>	—	2,5	—	V
Duty factor of horizontal output signal (note 16)	α	0,35	0,40	0,45	%
Rise and fall times of output pulse	t <sub>r</sub> , t <sub>f</sub>	—	400	—	ns
<b>Flyback input (pin 5)</b>					
Amplitude of input pulse	V <sub>5</sub>	2	4	6	V
Voltage at which gate pulse generator changes state (note 17)	V <sub>5</sub>	—	0	—	V

parameter	symbol	min.	typ.	max.	unit
<b>Coincidence detector mute output</b> (pin 28) (note 18)					
Voltage for in-sync condition	V <sub>28-10</sub>	—	9,5	—	V
Voltage for no-sync condition (no input signal)	V <sub>28-10</sub>	—	1,0	1,5	V
Voltage level for phase detector to switch from slow to fast	V <sub>28-10</sub>	3,7	4,1	4,5	V
Fast-to-slow hysteresis		—	1	—	V
Voltage level to activate mute function (transmitter identification)	V <sub>28-10</sub>	2,25	2,5	2,75	V
Output current for in-sync condition (peak-to-peak value)	I <sub>22(p-p)</sub>	0,7	1,0	—	mA
<b>Vertical oscillator</b> (pin 1)					
Free-running frequency at C = 220 nF; R = 560 kΩ	f <sub>fr</sub>	—	47,5	—	Hz
Spread with fixed external components		—	—	4	%
Holding range at nominal frequency		52,5	—	—	Hz
Temperature coefficient	TC	—	—	2x10 <sup>-4</sup>	K <sup>-1</sup>
Frequency variation due to change of supply voltage from 9,5 to 12 V	Δf <sub>fr</sub>	—	3	5	%
Leakage current at pin 1	I <sub>1</sub>	—	—	1,6	μA
<b>Vertical output</b> (pin 2)					
Output current	I <sub>2</sub>	1	1,3	—	mA
Output resistance	R <sub>2</sub>	—	2	—	kΩ
<b>Feedback input</b> (pin 3)					
Input voltage					
d.c. component	V <sub>3-10</sub>	4,0	5,0	5,5	V
a.c. component (peak-to-peak value)	V <sub>3-10(p-p)</sub>	—	1,2	—	V
Input current	I <sub>3</sub>	—	—	12	μA
Non-linearity of deflection current at V <sub>7-10</sub> = 10,5 V	ΔI <sub>3</sub>	—	—	2,5	%
Delay between leading edge of vertical sync and start of vertical oscillator flyback		6	—	10	μs

## Notes to the characteristics

1. The horizontal oscillator can be started by supplying a current of 6 mA to pin 22. Taking this current from the mains rectifier allows the positive supply voltage to pin 7 to be derived from the horizontal output stage (the load current of pin 27 is additional to the 6 mA quoted).
2. At start of a.g.c.
3. Measured with 0 dB = 200  $\mu$ V.
4. Measured at 10 mV (rms) top sync output signal.
5. Signal with negative-going sync; top white = 10% of the top sync amplitude.
6. Measured with test line as shown in Fig. 4. The differential gain is expressed as a percentage of the difference in peak amplitudes between the largest and smallest values relative to the subcarrier amplitude at blanking level. The differential phase is defined as the difference in degrees between the largest and smallest phase angles.
7. Measured with a source impedance of 75  $\Omega$ .  

$$\text{Signal-to-noise ratio} = 20 \log \frac{V_O \text{ black-to-white}}{V_{i(\text{rms})} \text{ at } B = 5 \text{ MHz}}$$
8. Measured with a sawtooth-modulated input signal:  $m = 90\%$ ;  $V_{i(\text{rms})} = 10 \text{ mV}$ ;  

$$\text{Amplitude modulation} = \frac{V_O \text{ SC at top sync} - V_O \text{ SC at white}}{V_O \text{ SC at top sync} + V_O \text{ SC at white}} \times 100\%.$$

(SC = sound carrier)
9. Starting point of tuner take-over for an npn tuner is when  $I_G = 1,8 \text{ mA}$ , and for a pnp tuner is when  $I_G = 0,2 \text{ mA}$ .
10. Measured at  $V_{g.9(\text{rms})} = 10 \text{ mV}$  and pin 16 loaded with  $2 \times 100 \text{ k}\Omega$  between  $V_7$  and ground. Reference tuned circuit Q-factor = 36.
11. Reference tuned circuit Q-factor = 16; audio frequency = 1 kHz; carrier frequency = 5,5 MHz.
12. The demodulator tuned circuit must be tuned for minimum distortion; output signal is measured at  $\Delta f = 7,5 \text{ kHz}$ ; other measurements are at  $\Delta f = 27,5 \text{ kHz}$ .
13. Volume control can be realized by a variable resistor (5 k $\Omega$ ) connected between pin 11 and ground, or by a variable voltage direct to pin 11 (the low value of input impedance to pin 11 must be taken into account).
14. The sync separator is noise-gated; the slicing level is referred to the top sync level and is independent of the video signal. The value stated is a percentage of the sync pulse amplitude, the level being dependent on external resistors connected to pin 26.
15. The phase detector current is increased by a factor of 7 during catching and when the phase detector is switched to 'fast' via pin 28, thus ensuring a wide catching range and a high dynamic loop gain.
16. The negative-going edge initiates switching-off of the line output transistor (simultaneous driver).
17. The circuit requires an integrated flyback pulse. Gate pulses for a.g.c. and coincidence detectors are obtained from the sawtooth waveform.
18. The functions of in-sync, out-of-sync and transmitter identification are combined on pin 28. For the reception of VCR signals,  $V_{28}$  must be fixed between 3 V and 4,5 V so that the time constant is fast and sound information is preserved.



APPLICATION INFORMATION

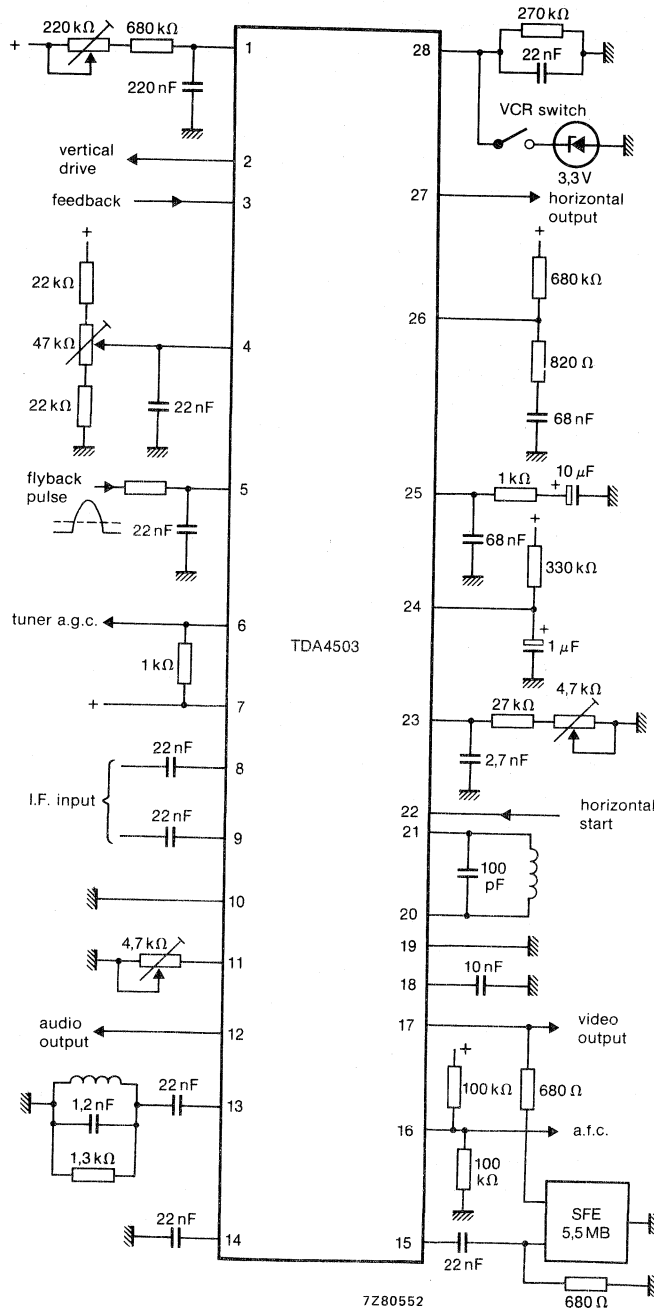


Fig. 2 Application circuit diagram.

APPLICATION INFORMATION (continued)

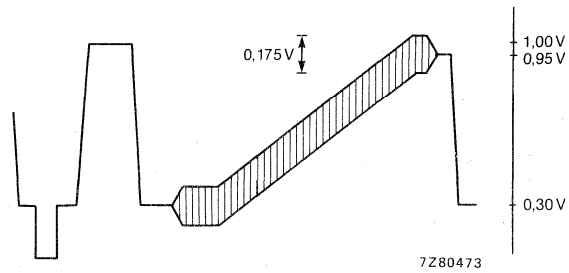


Fig. 3 Video output signal.

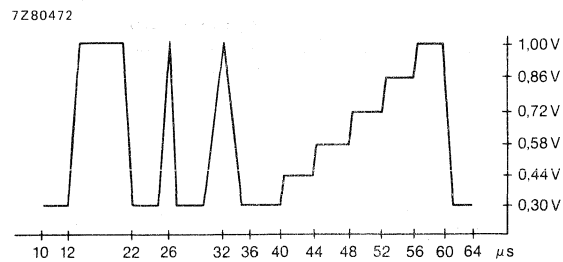


Fig. 4 E.B.U. test signal - line 330.

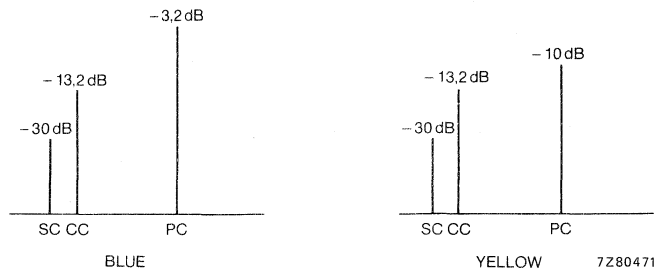


Fig. 5 Input signal conditions for intermodulation test: SC = sound carrier; CC = chrominance carrier; PC = picture carrier; all values are with respect to the top sync level.

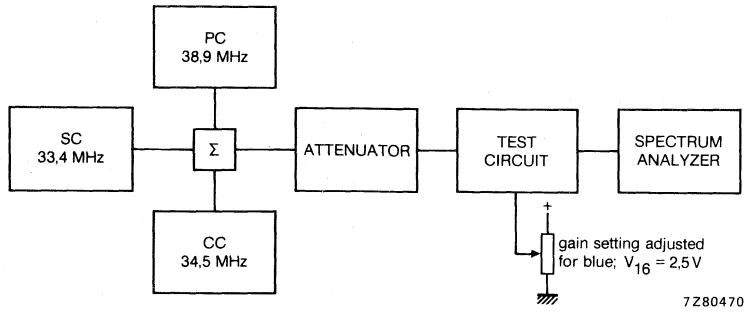


Fig. 6 Circuit for intermodulation test:

$$\text{value at 1,1 MHz} = 20\log \frac{V_O \text{ at 4,4 MHz}}{V_O \text{ at 1,1 MHz}} + 3,6 \text{ dB};$$

$$\text{value at 3,3 MHz} = 20\log \frac{V_O \text{ at 4,4 MHz}}{V_O \text{ at 3,3 MHz}} .$$

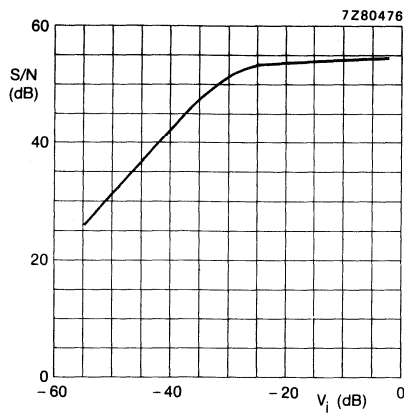


Fig. 7 Signal to noise ratio as a function of input voltage.

APPLICATION INFORMATION (continued)

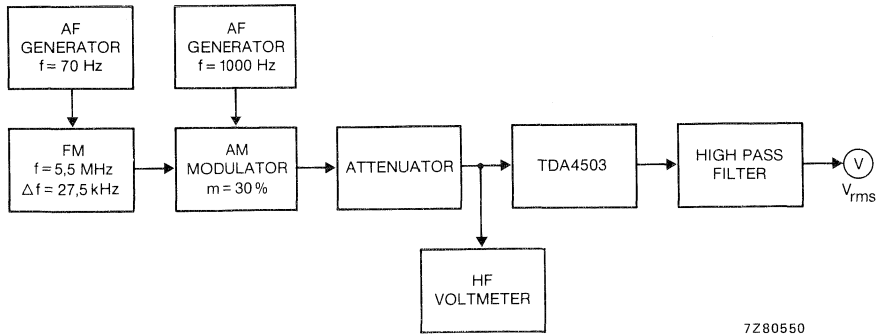


Fig. 8 Circuit for amplitude modulation rejection test.

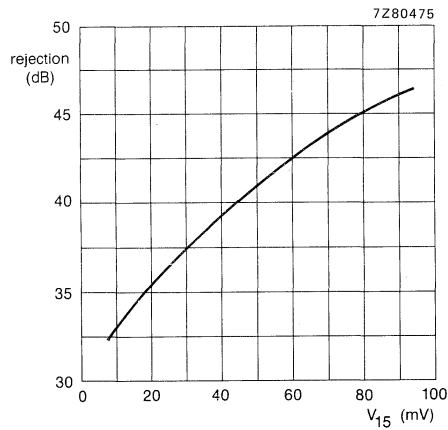


Fig. 9 Typical amplitude modulation rejection curve.

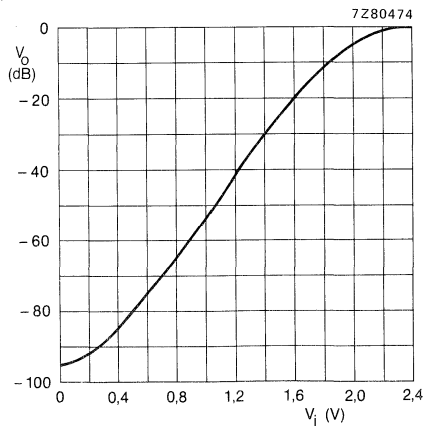


Fig. 10 Volume control characteristic.

## SMALL SIGNAL COMBINATION IC FOR COLOUR TV

## GENERAL DESCRIPTION

The TDA4505 is a TV sub-system circuit, for colour television receivers. For a complete colour television receiver only a tuner, a colour decoder and output stages are required.

## Features

- Vision IF amplifier with synchronous demodulator
- Tuner AGC (negative going control voltage with increasing signal)
- AGC detector suited for negative modulation
- AFC circuit
- Video preamplifier
- Sound IF amplifier, demodulator and preamplifier
- DC volume control or separate supply for starting the oscillator
- Horizontal synchronization circuit with two control loops
- Vertical synchronization (divider system) and sawtooth generation with automatic amplitude adjustment for 50 or 60 Hz mode
- Transmitter identification (mute)
- Three level sandcastle pulse generation

## QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 7)	V <sub>7-6</sub>	9,5	12	13,2	V
Supply current (pin 7)	I <sub>7</sub>	—	135	—	mA
Supply current (pin 11)	I <sub>11</sub>	—	6	8,5	mA
Operating ambient temperature range	T <sub>amb</sub>	−25	—	+ 65	°C
Storage temperature range	T <sub>stg</sub>	−25	—	+ 150	°C
Total power dissipation	P <sub>tot</sub>	—	—	2,3	W

## PACKAGE OUTLINE

28-lead DIL; plastic (with internal heat spreader) (SOT-117).

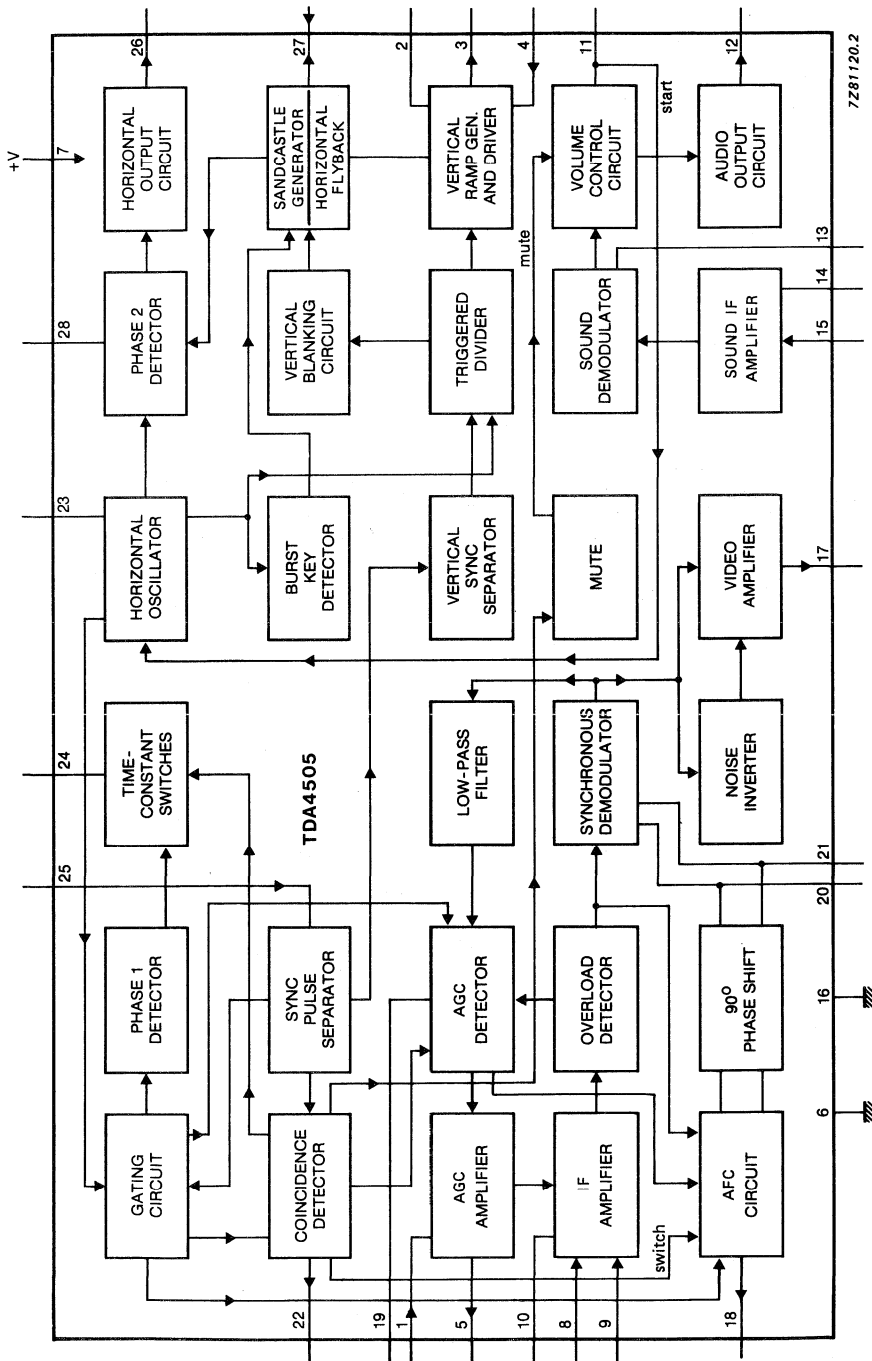


Fig. 1 Block diagram.

**PINNING**

- |  |                                     |
|--|-------------------------------------|
| 1. AGC take over                               | 15. Sound IF input                  |
| 2. Vertical ramp generator                     | 16. Ground                          |
| 3. Vertical drive                              | 17. Video output                    |
| 4. Vertical feedback                           | 18. AFC output                      |
| 5. Tuner AGC                                   | 19. AGC detection                   |
| 6. Ground                                      | 20. Synchronous demodulator         |
| 7. Supply                                      | 21. Synchronous demodulator         |
| 8. Vision IF input                             | 22. Coincidence detector decoupling |
| 9. Vision IF input                             | 23. Horizontal oscillator           |
| 10. Decoupling capacitor                       | 24. Phase 1 detector                |
| 11. Volume control/start horizontal oscillator | 25. Sync separator                  |
| 12. Audio output                               | 26. Horizontal drive                |
| 13. Sound demodulator                          | 27. Sandcastle output/flyback input |
| 14. Sound IF decoupling                        | 28. Phase 2 detector                |

DEVELOPMENT DATA

**FUNCTIONAL DESCRIPTION****IF amplifier, demodulator and AFC**

The IF amplifier has a symmetrical input (pins 8 and 9). The synchronous demodulator and the AFC circuit share an external reference tuned circuit (pins 20 and 21). An internal RC-network provides the necessary phase-shift for AFC operation. The AFC circuit is gated by an internally generated gating pulse. As a result the AFC output voltage contains no video information. The AFC circuit provides a control voltage output with a swing greater than 10 V at pin 18.

**AGC circuit**

Gating of the AGC detector is performed to reduce sensitivity of the IF amplifier to external electrical noise. The AGC time constant is provided by an RC-circuit connected to pin 19. The point of tuner take-over is preset by the voltage level at pin 1.

**Video amplifier**

The signal through the video amplifier comprises video and sound information.

**Sound circuit and horizontal oscillator starting function**

The input to the sound IF amplifier is obtained by a bandpass filter coupling from the video output (pin 17). The sound is demodulated and passed via a dual-function volume control stage to the audio output amplifier. The volume control function is obtained by connecting a variable resistor (4,7 k $\Omega$ ) between pin 11 and ground, or by supplying pin 11 with a variable voltage. Sound output is suppressed by an internal mute signal when no TV signal is identified.

**DC volume control/Horizontal oscillator start**

The circuit can be used with a DC volume control or with a starting possibility of the horizontal oscillator. The operation depends on the application. When during switch-on no current is supplied to pin 11 this pin will act as volume control. When a current of 6 mA is supplied to pin 11 the volume control is set to a fixed output signal and the IC will generate drive pulses for the horizontal deflection. The main supply of the IC can then be derived from the horizontal deflection.

**FUNCTIONAL DESCRIPTION** (continued)**Horizontal synchronization**

The video input signal (positive video) is connected to pin 25.

The horizontal synchronization has two control loops. This has been introduced to generate a sand-castle pulse. Using the oscillator sawtooth facilitates accurate timing of the burst key pulse. Therefore, the phase of this sawtooth must have a fixed relationship to the sync pulse, which is achieved by use of a second loop.

**Horizontal phase detector**

The circuit has the following operating conditions.

(a) Strong input signal, synchronized or not synchronized.

(The input signal condition is obtained from the AGC-circuit, the in-sync./out-of-sync from the coincidence detector). In this condition the time constant is optimal for VCR-playback i.e.; fast time constant during the vertical retrace (to be able to correct head-errors of the VCR) and such a time constant during scan that fluctuations of the sync. are corrected. The phase detector is not gated.

(b) Weak signal.

In this condition the time constant is doubled compared to condition (a). Also the phase detector is gated when the oscillator is synchronized. This ensures a stable display which is not disturbed by the noise in the video signal.

(c) Not synchronized (weak signal).

In this condition the time constant during scan and vertical retrace are the same as during scan in condition (a).

**Vertical sync pulse**

The vertical sync pulse integrator will not be disturbed when the vertical sync pulses have a width of only  $10\ \mu\text{s}$  with a separation of  $22\ \mu\text{s}$ . This type of vertical sync pulses are generated by video tapes with anti-copy guard.

**Vertical divider system**

The TDA4505 embodies a synchronized divider system for generating the vertical sawtooth at pin 2. The divider system has an internal frequency doubling circuit, which allows the horizontal oscillator to operate at its normal line frequency. One line period equals 2 clock pulses.

Use of the divider system avoids the requirement for vertical frequency adjustment. The divider has a discriminator window for automatic switching from 60 Hz to 50 Hz mode. When the trigger pulse comes before line 576 the 60 Hz mode is selected, otherwise the 50 Hz mode is selected.

The divider system operates with 2 different divider reset windows for maximum interference/disturbance protection.

The windows are activated via an up/down counter.

The counter increases its counter value by 1 each time the separated vertical sync pulse is within the search window. When not within the search window this value is decreased by 1.

The operating modes of the divider system are as follows.



**Mode A**

Large (search) window (divider ratio between 488 and 722)

This mode is valid for the following conditions:

- Divider is looking for a new transmitter
- Divider ratio found — not within the narrow window limits
- Non-standard TV-signal condition detected while a double or enlarged vertical sync pulse is found after the internally generated anti-topflutter pulse has ended. This means a vertical sync pulse width > 8 clock pulses (50 Hz); > 10 clock pulses (60 Hz)  
Usually this mode is activated for video tape recorders operating in the feature trick mode
- Up/down counter value of the divider system operating in the narrow window mode drops below count 10

**Mode B**

Narrow window (divider ratio between 522 to 528; 60 Hz or 622 to 628; 50 Hz)

The divider system switches over to this mode when the up/down counter has reached its maximum value of 15 approved vertical sync pulses. When the divider operates in this mode and a vertical sync pulse is missing within the window, the divider is reset at the end of the window and the counter value is decreased by 1. At a counter value below 10 the divider system switches over the large window mode.

The divider system also generates an anti-topflutter pulse which inhibits the Phase 1 detector during the vertical sync pulse. The pulse width is dependent on the divider mode. In Mode A the start is generated by reset of the divider. In Mode B the anti-topflutter pulse starts at the beginning of the first equalizing pulse.

The anti-topflutter pulse ends at count 10 for the 50 Hz mode and count 12 for the 60 Hz mode.

The vertical blanking pulse is also generated via the divider system. The start is by reset of the divider while the blanking pulse width is 34 (17 lines) for the 60 Hz mode and at count 42 (21 lines) for the 50 Hz mode. The vertical blanking pulse at the sandcastle output (pin 27) is generated by adding the anti-topflutter pulse to the blanking pulse. Thus the vertical blanking pulse starts at the beginning of the first equalizing pulse when the divider operates in Mode B. The length of the vertical blanking in this condition is 21 lines in the 60 Hz mode and 25 lines in the 50 Hz mode.

DEVELOPMENT DATA

**Application when external video signals require synchronization**

The input to the sync separator is externally available via pin 25. For normal application the video output signal at pin 17 is AC coupled to this input as shown in Fig. 10. It is possible to interrupt this connection and drive the sync separator from other sources such as:

- a teletext decoder in serial mode
- an external audio signal via a peritelevision connector

When a teletext decoder is applied the IF amplifier and synchronization circuit are operating in the same phase which allows various connections between the two parts (i.e. AGC gating) can remain active. When external signals are applied to the sync separator the connections between the two parts must be interrupted. This can be achieved by connecting pin 22 to ground, which results in the following conditions:

- AGC detector is not gated
- AFC circuit is active
- Mute circuit not active — sound channel remains switched on
- Phase detector 1 has an optimal time constant for external video sources

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage (pin 7)	$V_P = V_{7-6}$	—	13,2	V
Total power dissipation	$P_{tot}$	—	2,3	W
Operating ambient temperature range	$T_{amb}$	-25	+ 65	°C
Storage temperature range	$T_{stg}$	-25	+ 150	°C

**CHARACTERISTICS** $V_P = V_{7-6} = 12$  V;  $T_{amb} = 25$  °C; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supplies</b>						
Supply voltage (pin 7)		$V_{7-6}$	9,5	12	13,2	V
Supply current (pin 7)		$I_7$	—	135	—	mA
Supply current (pin 11) for horizontal oscillator start	note 1	$I_{11}$	—	6	8,5	mA
<b>Vision IF amplifier (pins 8 and 9)</b>						
Input sensitivity at 38,9 MHz	on-set AGC	$V_{8-9}$	60	130	180	μA
Input sensitivity at 45,75 MHz	on-set AGC	$V_{8-9}$	—	140	—	μA
Differential input resistance (pin 8 to 9)		$R_{8-9}$	800	1300	1800	Ω
Differential input capacitance (pin 8 to 9)		$C_{8-9}$	—	5	—	pF
Gain control range		$G_{8-9}$	—	63	—	dB
Maximum input signal		$V_{8-9}$	50	180	—	mV
Expansion of output signal for 40 dB variation of input signal with $V_{8-9}$ at 300 μV, 0 dB)		$\Delta V_{17-6}$	—	1	—	dB
<b>Video amplifier</b>						
Measured at top sync input signal voltage (rms value) of 10 mV						
Output level for zero signal input (zero point of switched demodulator)		$V_{17-6}$	5,4	5,8	6,2	V
Output signal top sync level	note 2	$V_{17-6}$	2,7	2,9	3,1	V
Amplitude of video output signal (peak-to-peak value)		$V_{17-6(p-p)}$	2,3	2,6	2,9	V

parameter	conditions	symbol	min.	typ.	max.	unit
Internal bias current of output transistor (npn emitter follower)		$I_{17(int)}$	1,4	2,0	—	mA
Bandwidth of demodulated output signal		B	4	4,5	—	MHz
Differential gain	note 3	$G_{17}$	—	4	10	%
Differential phase	note 3	$\varphi$	—	3	10	deg
Video non-linearity	note 4	NL	—	4	10	%
Intermodulation with input signal of 10 mV(rms)	see Fig. 2 and Fig. 5					
f = 1,1 MHz (blue)			50	55	—	dB
f = 1,1 MHz (yellow)			48	52	—	dB
f = 3,3 MHz (blue)			50	55	—	dB
f = 3,3 MHz (yellow)			50	55	—	dB
Signal-to-noise ratio	$Z_S = 75 \Omega$ ; note 5					
$V_i = 10$ mV		S/N	45	50	—	dB
end of gain control range as a function of the input signal		S/N	50	55	—	dB
		S/N	see Fig. 6			
Residual carrier signal			—	7	30	mV
Residual 2nd harmonic of carrier signal			—	24	40	mV
<b>Tuner AGC</b>	note 6					
Minimum starting point take-over (rms value)		$V_{1-6(rms)}$	—	—	0,5	mV
Maximum starting point take-over (rms value)		$V_{1-6(rms)}$	50	180	—	mV
Maximum output swing		$I_5(max)$	6	10	—	mA
Output saturation voltage	$I_5 = 2$ mA	$V_{5-6(sat)}$	—	100	300	mV
Leakage current		$I_5$	—	0,7	1	$\mu$ A
Input signal variation complete tuner control		$\Delta V_i$	0,2	2,0	5,0	dB
<b>AFC circuit (pin 18)</b>	note 7					
AFC output voltage swing (peak-to-peak value)		$V_{18-6(p-p)}$	9,2	10	11,5	V
Available output current		$\pm I_{18}$	—	2,8	—	mA
Control steepness			35	50	70	mV/kHz
Output voltage at nominal tuning of the reference tuned circuit		$V_{18-6}$	—	6	—	V
Offset current AFC output (pins 20 and 21 short-circuited)		$I_{18}$	—	0	$\pm 100$	$\mu$ A

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Sound circuit</b>						
Input limiting voltage	$V_o = V_{o(max)} = 3 \text{ dB};$ $Q_L = 16; f_{AF} = 1 \text{ kHz};$ $f_c = 5,5 \text{ MHz}$	V15-6	—	400	800	$\mu\text{A}$
Input resistance	$V_{i(rms)} = 1 \text{ mV}$	R15	—	2,6	—	$\text{k}\Omega$
Input capacitance	$V_{i(rms)} = 1 \text{ mV}$	C15	—	6	—	pF
AM suppression (Figs 7 and 8)	$V_i = 10 \text{ mV}$	AMS	—	46	—	dB
	$V_i = 50 \text{ mV}$	AMS	—	50	—	dB
AF output signal (rms value)	$\Delta f = 7,5 \text{ kHz};$ minimum distortion; maximum volume control	V12-6(rms)	400	600	800	mV
AF output signal pin 11 as starting pin (rms value)	$\Delta f = 50 \text{ kHz};$ $V_{11-6} > 10,5 \text{ V}$	V12-6(rms)	300	700	1400	mV
AF output impedance		Z12	—	25	100	$\Omega$
Total harmonic distortion	volume control 20 dB; $\Delta f = 7,5 \text{ kHz}$	THD	—	1	3	%
Ripple rejection	volume control 20 dB; $f_k = 100 \text{ Hz}$ when muted	RR	—	27	—	dB
		RR	—	30	—	dB
Output voltage in mute condition		V12-6	—	3,0	—	V
Signal-to-noise ratio	$\Delta f = 27,5 \text{ kHz};$ weighted noise in accordance with CCIR 468	S/N	—	56	—	dB
<b>Volume control</b>						
Output voltage	pin 11 open-circuit	V11-6	—	5,5	7,0	V
Output current	pin 11 short-circuit	I11	—	0,9	1,5	mA
External control resistor		R11	—	4,7	—	$\text{k}\Omega$
Suppression output signal during mute condition		OSS	60	66	—	dB

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Sync separator and first control loop</b>						
Required sync pulse amplitude (peak-to-peak value)	$R_{17-25} = 1,8 \text{ k}\Omega$ ; note 8	$V_{25-6(p-p)}$	200	800	—	mV
Input current	$V_{25-6} > 5 \text{ V}$ $V_{25-6} = 0 \text{ V}$	$I_{25}$	—	8,5	—	$\mu\text{A}$
		$I_{25}$	—	10	—	mA
Holding range PLL		$\pm \Delta f$	—	1100	1500	Hz
Catching range PLL		$\pm \Delta f$	600	1000	—	Hz
<b>Second control loop (positive edge)</b>						
Control sensitivity		$\Delta t_d / \Delta t_o$	—	50	—	
Control range		$t_d$	—	25	—	$\mu\text{s}$
<b>Phase adjustment (via second control loop)</b>						
Control sensitivity			—	25	—	$\mu\text{A}/\mu\text{s}$
Maximum allowed phase shift		$\alpha$	—	$\pm 2$	—	$\mu\text{s}$
<b>Horizontal oscillator (pin 23)</b>						
	note 9					
Free running frequency	$R = *; C = 2,7 \text{ nF}$	$f_{fr}$	—	15625	—	Hz
Spread with fixed external components		$\Delta f$	—	0,4	4	%
Frequency variation due to change of supply voltage from 9,5 to 13,2 V		$\Delta f_{fr}$	—	0,2	0,5	%
Frequency variation with temperature		TC	—	—	1,6	Hz/K
Maximum frequency shift		$\Delta f_{fr}$	—	4	10	%
Maximum frequency deviation at start horizontal output		$\Delta f_{fr}$	—	8	10	%
<b>Horizontal output (pin 26)</b>						
Output voltage high level		$V_{26-6}$	—	—	13,2	V
Output voltage at which protection commences		$V_{26-6}$	—	13,2	15,8	V
Output voltage LOW	$I_{26} = 10 \text{ mA}$	$V_{26-6}$	—	0,15	0,5	V
Duty cycle of horizontal output signal	$t_p = 10 \mu\text{s}$	d	—	0,45	—	
Rise time of output pulse		$t_r$	—	300	370	ns
Fall time of output pulse		$t_f$	—	120	240	ns

\* Value to be fixed.

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Horizontal flyback input and sandcastle output</b>	note 10					
Input current required during flyback pulse		$I_{27}$	0,1	—	2,0	mA
Output voltage during burst key pulse		$V_{27-6}$	8,4	9,0	—	V
Output voltage during horizontal blanking		$V_{27-6}$	4,1	4,4	5,0	V
Output voltage during vertical blanking		$V_{27-6}$	2,1	2,4	2,7	V
Pulse width						
burst key pulse	60 Hz	$t_W$	3,1	3,5	3,9	$\mu s$
burst key pulse	50 Hz	$t_W$	3,5	3,8	4,4	$\mu s$
horizontal blanking pulse						flyback pulse width
vertical blanking pulse						
50 Hz divider in search window			—	21	—	lines
60 Hz divider in search window			—	17	—	lines
50 Hz divider in narrow window			—	25	—	lines
60 Hz divider in narrow window			—	21	—	lines
Delay between start of sync pulse at video output and falling edge of burst key pulse for NTSC signals			—	—	9,2	$\mu s$
<b>Coincidence detector mute output</b>	note 11					
Voltage for in-sync condition		$V_{22-6}$	9,5	10,3	11	V
Voltage for no-sync condition	no signal	$V_{22-6}$	1,2	1,45	2,2	V
Switching level to switch off AFC		$V_{22-6}$	—	6,4	—	V
Hysteresis AFC switch		$V_{22-6}$	—	0,4	—	V
Switching level to activate mute function (transmitter identification)		$V_{22-6}$	2,25	2,4	2,75	V
Hysteresis MUTE function		$V_{22-6}$	—	0,5	—	V
Charge current (peak-to-peak value)	in-sync 4,7 $\mu s$	$I_{22(p-p)}$	0,7	1,0	—	mA
Discharge current (peak-to-peak value)	in-sync 1,0 $\mu s$	$I_{22(p-p)}$	—	0,5	—	mA
Required voltage to allow synchronization of circuit with signals which have no relation to the video output signal		$V_{22-6}$	—	1,0	1,2	mA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Vertical ramp generator</b>						
Input current during scan	note 12	$I_2$	—	0,5	2,0	$\mu\text{A}$
Discharge current during retrace		$I_2$	0,3	0,35	0,4	mA
Sawtooth amplitude (peak-to-peak value)		$I_{2-6(p-p)}$	—	0,8	1,1	V
<b>Vertical drive output (pin 3)</b>						
Maximum available output current		$I_3$	1,5	3,0	—	mA
Maximum output voltage	$I_3 = 1,5 \text{ mA}$	$V_{3-6}$	—	4,0	—	V
<b>Vertical feedback input (pin 4)</b>						
Input voltage						
DC component		$V_{4-6}$	2,9	3,3	3,7	V
AC component (peak-to-peak value)		$V_{4-6(p-p)}$	—	1,3	—	V
Input current		$I_4$	—	—	12	$\mu\text{A}$
Internal precorrection to sawtooth		$\Delta t_p$	—	6	—	%
Deviation amplitude	50/60 Hz		—	—	2	%
<b>Vertical guard</b>						
Active at a deviation with respect to the DC feedback level switching level LOW	note 13					
switching level HIGH	$V_{27-6} = 2,5 \text{ V}$	$\Delta_{4-6}$	—	-1,3	—	V
		$\Delta_{4-6}$	—	+1,9	—	V

**Notes to the characteristics**

- Pin 11 has a double function. When during switch-on a current of 6 mA is supplied to this pin, which is used to start the horizontal oscillator. The main supply can then be obtained from the horizontal deflection stage. When no current is supplied to this pin it can be used as volume control. The indicated maximum value is the current at which all ICs will start. Higher currents are allowed, the excess current is bypassed to ground.
- Signal with negative going sync, top white 10% of the top sync amplitude.
- Measured according the test line shown in Fig. 3:
  - The differential gain is expressed as a percentage of the difference in peak amplitudes between the largest and smallest value relative to the subcarrier at blanking level.
  - The differential phase is defined as the difference in degrees between the largest and smallest phase angle.
- This figure is valid for the complete video signal amplitude (peak white-to-black); see Fig. 4.
- Signal-to-noise ratio =  $20 \log \frac{V_{\text{out black-to-white}}}{V_{n(\text{rms})}}$  at  $B = 5 \text{ MHz}$
- Tuner AGC; starting point tuner take-over at  $I = 0,2 \text{ mA}$ . Take-over to be adjusted with a potentiometer of  $47 \text{ k}\Omega$ . The voltage at pin 1 must not be reduced below 1 V.

## Notes to the characteristics (continued)

7. The AFC control voltage is obtained by multiplying the IF output signal (which is also used to drive the synchronous demodulator) with a reference carrier. This reference carrier is obtained from the demodulator tuned circuit via a  $90^\circ$  phase shift network. The IF output signal has an asymmetrical frequency spectrum with respect to the carrier frequency. To avoid problems due to this asymmetrical signal the AFC circuit is gated by an internally generated gating pulse. As a result the detector is operative only during sync/black level at a constant carrier amplitude which contains no additional side bands. Thus the AFC output voltage contains no video information.

At very weak input signals the drive signal for the AFC circuit will have a high noise content. The noise input has an asymmetrical frequency spectrum which will cause an offset of the AFC output voltage. To avoid problems due to this effect the AFC is switched off when the AGC is controlled to maximum gain.

Values are measured with an input signal of 10 mV (rms) and the AFC output loaded with  $2 \times 470 \text{ k}\Omega$  between supply voltage and ground. The unloaded Q-factor of the reference tuned circuit is 70. The AFC is switched off when no signal is detected by the coincidence detector or when the voltage at pin 22 is between 1,2 V and 6,4 V. This can be realized by a resistor of  $68 \text{ k}\Omega$  connected between pin 22 and ground.

8. The slicing level can be varied by changing the value of the resistance between pin 17 and pin 25. A higher resistance results in a larger value of the minimum sync pulse amplitude. The slicing level is independent of the video information.
9. Frequency control is obtained by supplying a correction current to the oscillator RC-network via a resistor, connected between the Phase 1 detector output and the oscillator network. The oscillator can be adjusted to the correct frequency by one of the two following methods:

(a) Interrupt R<sub>23-24</sub>.

(b) Short-circuit the sync separator bias network (pin 25 to power supply).

To avoid the necessity of a VCR switch, the time-constant of phase detector at strong input signal is sufficiently short to obtain a stable picture during VCR playback. During the vertical retrace period the time-constant is even shorter so that the head errors of the VCR are compensated at the beginning of the scan. During weak signal conditions (information derived from the AGC circuit) the time constant is increased to obtain a good noise immunity.

10. The horizontal flyback input and the sandcastle output have been combined on pin 27. The flyback pulse is clamped to a level of 4,9 V. The minimum current to drive the second control loop is 0,1 mA.
11. The functions in-sync/out-of-sync and transmitter identification have been combined on pin 22. The capacitor is charged during the sync pulse and discharged during the time difference between gating and sync pulse.
12. The vertical scan is synchronized by means of a divider system. Therefore no adjustment is required for the ramp generator. The divider detects whether the incoming signal has a vertical frequency of 50 or 60 Hz and corrects the vertical amplitude.
13. To avoid screenburn due to a collapse of the vertical deflection a continuous blanking level is inserted into the sandcastle pulse when the feedback voltage of the vertical deflection is not within the specified limits.

## Where

SC = sound carrier

CC = chrominance carrier

PC = picture carrier

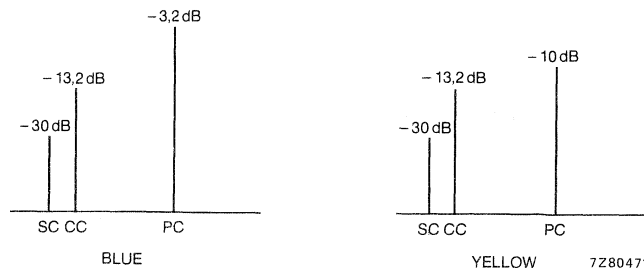


Fig. 2 Input signal conditions for intermodulation test; all values are with respect to the top sync level.



DEVELOPMENT DATA

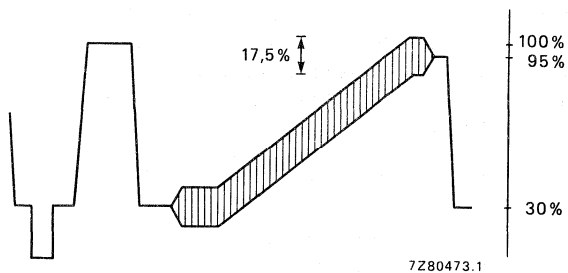


Fig. 3 Video output signal.


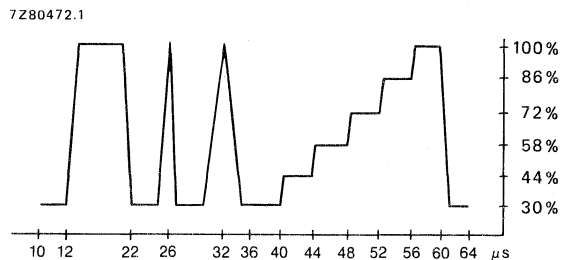


Fig. 4 European Broadcasting Union (EBU) test signal waveform (line 330).

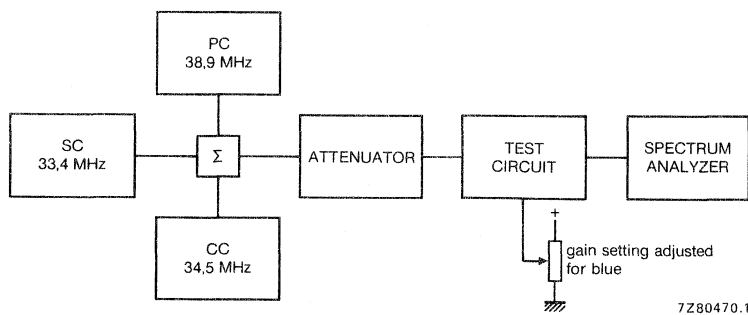

Where:

$$\text{Value at 1,1 MHz: } 20 \log \frac{V_o \text{ at 4,4 MHz}}{V_o \text{ at 1,1 MHz}} + 3,6 \text{ dB}$$

$$\text{Value at 3,3 MHz: } 20 \log \frac{V_o \text{ at 4,4 MHz}}{V_o \text{ at 3,3 MHz}}$$

Fig. 5 Test set-up intermodulation.

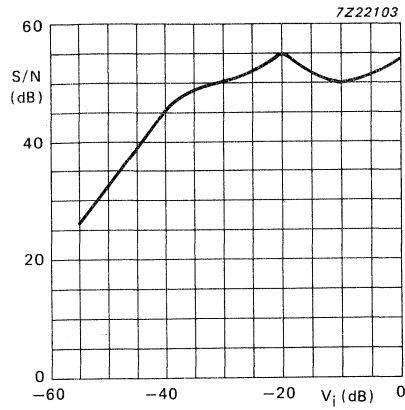


Fig. 6 Signal-to-noise ratio as a function of input voltage; 0 dB = 100 mV.

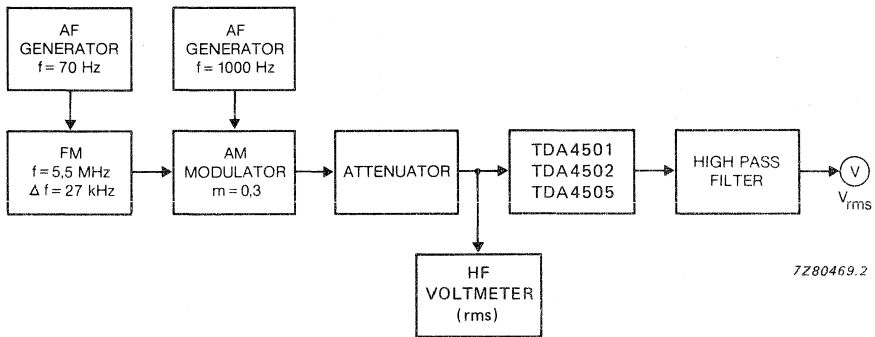


Fig. 7 Test set-up AM suppression.

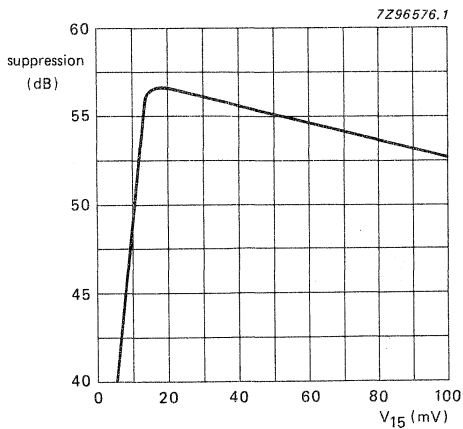


Fig. 8 AM suppression.


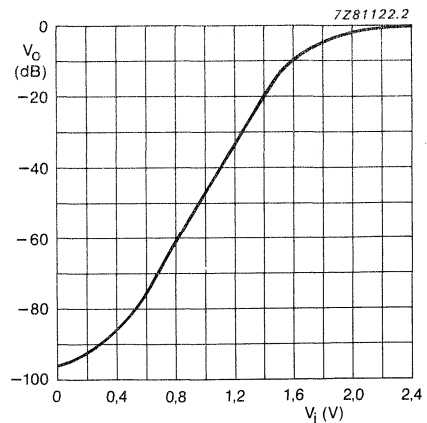


Fig. 9 Volume control characteristics.

APPLICATION INFORMATION

DEVELOPMENT DATA

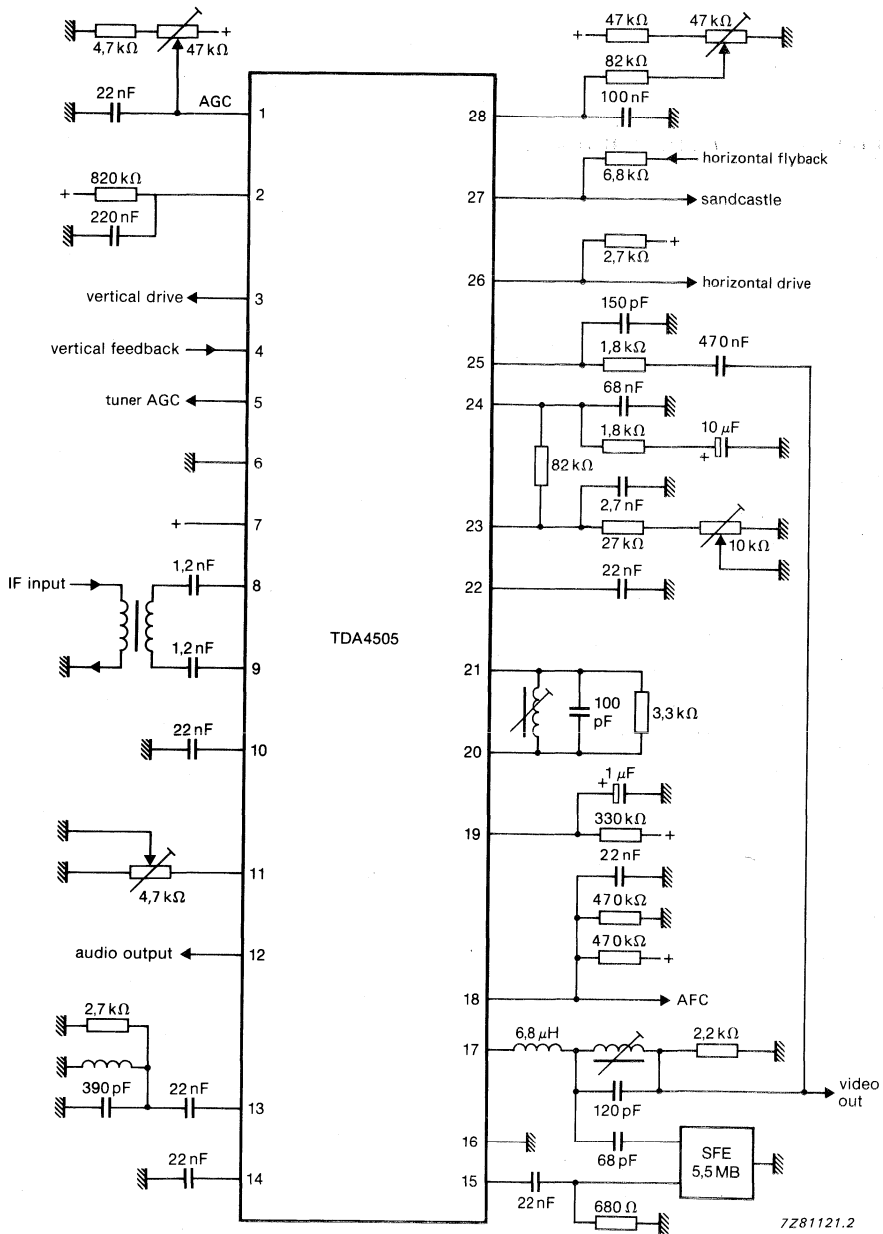

7Z81121.2

Fig. 10 Application diagram.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4510

## PAL DECODER

The TDA4510 is a colour decoder for the PAL standard, which is pin sequent compatible with multi-standard decoder TDA4555 and also pin compatible with NTSC decoder TDA4570. It incorporates the following functions:

### Chrominance part

- Gain controlled chrominance amplifier with operating point control stage
- Chrominance output stage for driving the 64  $\mu$ s delay line
- Blanking circuit for the colour burst signal
- Automatic chrominance control (ACC) with sampled rectifier during burst-key

### Oscillator and control voltage part

- Reference oscillator for double subcarrier frequency
- Gated phase comparison
- Identification demodulator and automatic colour killer
- Sandcastle pulse detector
- Service switch

### Demodulator part

- Two synchronous demodulators for the (B-Y) and (R-Y) signals
- PAL flip-flop and PAL switch
- Colour switching stages
- Separate colour switching output
- (B-Y) and (R-Y) signal output stages
- Internal filtering of residual carrier

### QUICK REFERENCE DATA

Supply voltage	$V_P = V_{7-3}$	typ.	12 V
Supply current	$I_P = I_7$	typ.	50 mA
Chrominance input signal (peak-to-peak)	$V_{9-3(p-p)}$		10 to 400 mV
Chrominance output signal (peak-to-peak)	$V_{6-3(p-p)}$	typ.	1,6 V
Colour difference output signals (peak-to-peak values)			
-(R-Y) signal	$V_{1-3(p-p)}$	typ.	1,05 V $\pm$ 2 dB
-(B-Y) signal	$V_{2-3(p-p)}$	typ.	1,33 V $\pm$ 2 dB
Sandcastle pulse, required amplitude for			
burst gating level	$V_{15-3}$	typ.	7,7 V
horizontal pulse separation	$V_{15-3}$	typ.	4,5 V
vertical and horizontal pulse separation	$V_{15-3}$	typ.	2,5 V

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

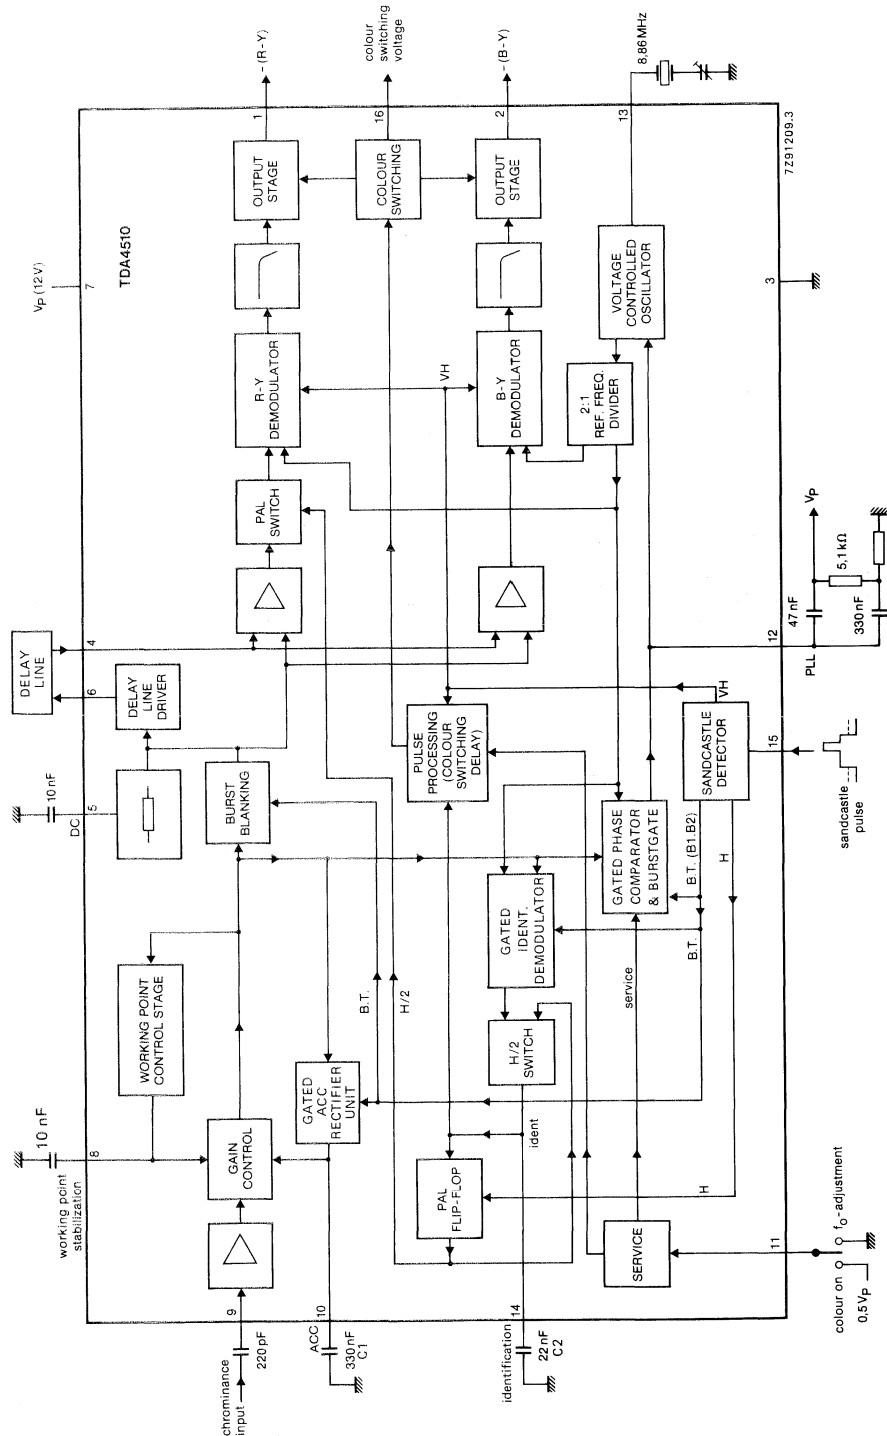


Fig. 1 Block diagram.

External capacitors in Fig. 1

C1 filter capacitor for control voltage (pin 10)

C2 filter capacitor for identification signal (pin 14)

**FUNCTIONAL DESCRIPTION****DIVIDER STAGES**

The divider stages provide  $-(R-Y)$  and  $-(B-Y)$  reference signals with the correct 90 degrees relation for the demodulators.

**PHASE COMPARATOR**

The phase comparator compares the  $-(R-Y)$  reference signal with the burst pulse and controls the frequency and phase of the reference oscillator.

**IDENTIFICATION DEMODULATOR**

The identification demodulator delivers a positive going identification signal for PAL-signals at pin 14, also used for the automatic colour-killer.

**SERVICE SWITCH**

The service switch has two functions. The first position ( $V_{14.3} < 1 \text{ V}$ ) allows the adjustment of the reference oscillator. Therefore the colour is switched on and the burst for the oscillator PLL is switched off. The second position ( $V_{14.3} > 5 \text{ V}$ ) switches the colour on and the output signals can be observed.

DEVELOPMENT DATA

**SANDCASTLE PULSE DETECTOR**

Sandcastle pulse detector for burst-gate, line and blanking (horizontal and vertical) pulse detection. The vertical part of the sandcastle pulse is needed for the internal colour-on and colour-off delay.

**PULSE PROCESSING PART**

Pulse processing part which shall prevent a premature switching on of the colour. The colour-on delay, two or three field periods after identification of the PAL signal, is achieved by a counter. The colour is switched off immediately or at the latest one field period after disappearance of the identification voltage.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range	$V_P = V_{7.3}$	10,8 to 13,2 V
Currents		
at pins 1 and 2	$-I_{1,2}$	max. 5 mA
at pin 6	$-I_6$	max. 15 mA
at pin 16	$-I_{16}$	max. 5 mA
Total power dissipation	$P_{tot}$	max. 800 mW
Storage temperature	$T_{stg}$	-25 to + 150 °C
Operating ambient temperature	$T_{amb}$	0 to + 70 °C

**CHARACTERISTICS**

$V_P = 12\text{ V}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ ; measured in Fig. 2 unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
Supply current	$I_7$	—	50	—	mA
<b>Chrominance part</b>					
Input voltage range (peak-to-peak value)	$V_{9-3(p-p)}$	10	—	400	mV
Nominal input voltage (peak-to-peak value) with 75% colour bar signal	$V_{9-3(p-p)}$	—	100	—	mV
Input impedance	$Z_{9-3}$	—	3,3	—	k $\Omega$
Input capacitance	$C_{9-3}$	—	4	—	pF
<b>Colour ON</b>					
Chrominance output voltage (peak-to-peak) with 75% colour bar signal	$V_{6-3(p-p)}$	—	1,6	—	V
d.c. voltage at chrominance output	$V_{6-3}$	—	8,2	—	V
<b>Oscillator and control voltage part</b>					
Oscillator frequency	$f_o$	—	8,8	—	MHz
Input resistance	$R_{13-3}$	—	350	—	$\Omega$
Catching range (depending on RC-network at pin 12)	$f$	$\pm 400$	—	—	Hz
<b>Control voltage</b>					
without burst signal	$V_{14-3}$	—	6,0	—	V
colour on switching threshold	$V_{14-3}$	—	6,6	—	V
hysteresis of colour switching	$V_{14-3}$	—	150	—	mV
flip-flop correction (FFC) voltage	$V_{14-3}$	—	5,5	—	V
hysteresis of FFC	$V_{14-3}$	—	170	—	mV
Colour-on delay		2	—	3	f.p.*
Colour-off delay		0	—	1	f.p.*
<b>First service position (PLL is inactive)</b>					
for oscillator adjustment, colour on)	$V_{11-3}$	0	—	1	V
second service position (colour on)	$V_{11-3}$	5	—	—	V
<b>Colour switching output (open npn emitter)</b>					
output current	$-I_{16}$	—	—	5	mA
colour-on voltage	$V_{16-3}$	—	6	—	V
colour-off voltage	$V_{16-3}$	—	0	—	V
<b>Demodulator part</b>					
<b>Delayed chrominance input signal</b>					
(peak-to-peak value) with 75% colour bar signal	$V_{4-3(p-p)}$	—	200	—	mV
<b>Colour difference output signals</b>					
(peak-to-peak value)					
—(R-Y) signal	$V_{1-3(p-p)}$	0,84	1,05	1,32	V
—(B-Y) signal	$V_{2-3(p-p)}$	1,06	1,33	1,67	V



parameter	symbol	min.	typ.	max.	unit
Ratio of colour difference output signals (R-Y)/(B-Y)	$V_{1-3}/V_{2-3}$	0,71	0,79	0,87	V
D.C. voltage at colour difference outputs	$V_{1; 2-3}$	—	7,7	—	V
Residual carrier voltage at colour difference outputs					
1 x subcarrier frequency (4,4 MHz)	$V_{1,2-3(p-p)}$	—	—	20	mV
2 x subcarrier frequency (8,8 MHz)	$V_{1,2-3(p-p)}$	—	—	20	mV
<b>Sandcastle pulse detector</b>					
Thresholds:					
Field- and line-pulse separation pulse ON	$V_{15-3}$	1,3	1,6	1,9	V
Required pulse amplitude	$V_{15-3}$	2,0	2,5	3,0	V
Line pulse separation; pulse ON	$V_{15-3}$	3,3	3,6	3,9	V
Required pulse amplitude	$V_{15-3}$	4,1	4,5	4,9	V
Burst pulse separation; pulse ON	$V_{15-3}$	6,6	7,1	7,6	V
Required pulse amplitude	$V_{15-3}$	7,7	—	—	V
Input voltage during horizontal scanning	$V_{15-3}$	—	—	1,1	V
Input current	$-I_{15}$	—	—	100	$\mu A$

DEVELOPMENT DATA

\* f.p. is shortening for field periods in this case.

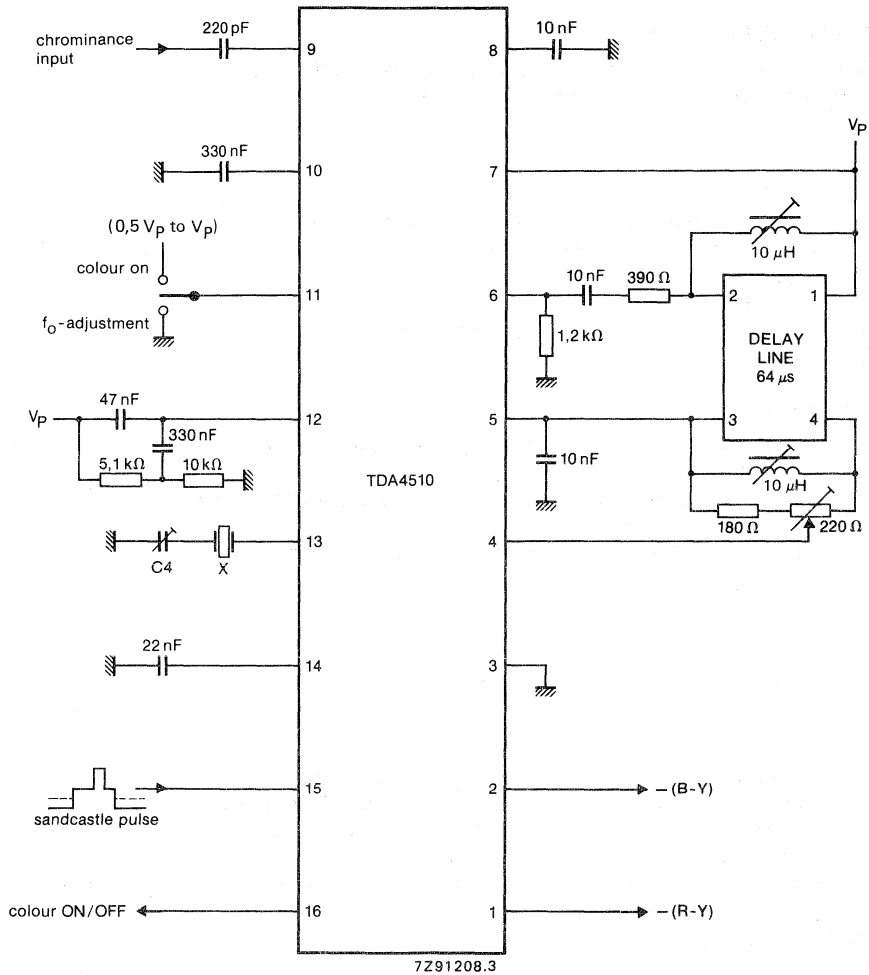


Fig. 2 Application information and test circuit.

C4 = 5 to 27 pF, X = 8,8 MHz; nominal frequency 8,867 238 MHz; resonance resistance 60 Ω, load capacitance 20 pF, dynamic capacitance 22 fF and static capacitance 5,5 pF.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4532

## SECAM DECODER

### GENERAL DESCRIPTION

The TDA4532 is a monolithic integrated colour decoder for SECAM television receivers. It is pin compatible with the multi-standard decoder TDA4555.

#### Features

##### Chrominance part

- Gain controlled amplifier with operating point control stage
- ACC (automatic chrominance control) with rectifier which is disabled during horizontal and vertical flyback
- Chrominance output stage for driving the 64  $\mu$ s glass delay line
- Limiter stages for direct and delayed chrominance signal
- SECAM permutator

##### Identification part

- Identification demodulator which is active during the horizontal identification signal and/or during part of the vertical flyback
- Identification mode switch (horizontal, vertical or combined horizontal and vertical)
- Service switch for forced colour on
- Sandcastle pulse for detection of burst gating pulse, horizontal blanking pulse, combined horizontal and vertical blanking pulse. The vertical part of the sandcastle pulse is required for the internal colour ON and colour OFF delay.
- Pulse processor part which prevents premature switch-on of the colour. A counter provides colour ON delay of 2 or 3 vertical periods after identification of the SECAM signal. Colour is switched off immediately the identification voltage disappears, or 1 vertical period later

##### Demodulator part


- Two quadrature demodulators with external reference tuned circuits
- Internal filtering of residual carrier in the demodulated colour difference signals
- De-emphasis circuit and colour switching stages in front of the output stages. The colour switching stages are controlled by the pulse processing part
- (B-Y) and (R-Y) colour difference output stages are low resistance n-p-n emitter followers

### QUICK REFERENCE DATA

Supply voltage (pin 13)	$V_p = V_{13-9}$	typ.	12 V
Supply current (pin 13)	$I_p = I_{13}$	typ.	60 mA
Chrominance input signal (peak-to-peak)	$V_{15-9(p-p)}$		20 to 400 mV
Chrominance output signal (peak-to-peak)	$V_{12-9(p-p)}$	typ.	1,6 V
Colour difference output signals (peak-to-peak values)			
-(R-Y)	$V_{1-9(p-p)}$	typ.	1,05 V
-(B-Y)	$V_{3-9(p-p)}$	typ.	1,33 V
Sandcastle pulse; required amplitude for			
vertical and horizontal pulse separation	$V_{24-9}$	typ.	2,5 V
horizontal pulse separation	$V_{24-9}$	typ.	4,5 V
burst gating	$V_{24-9}$	min.	7,7 V

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

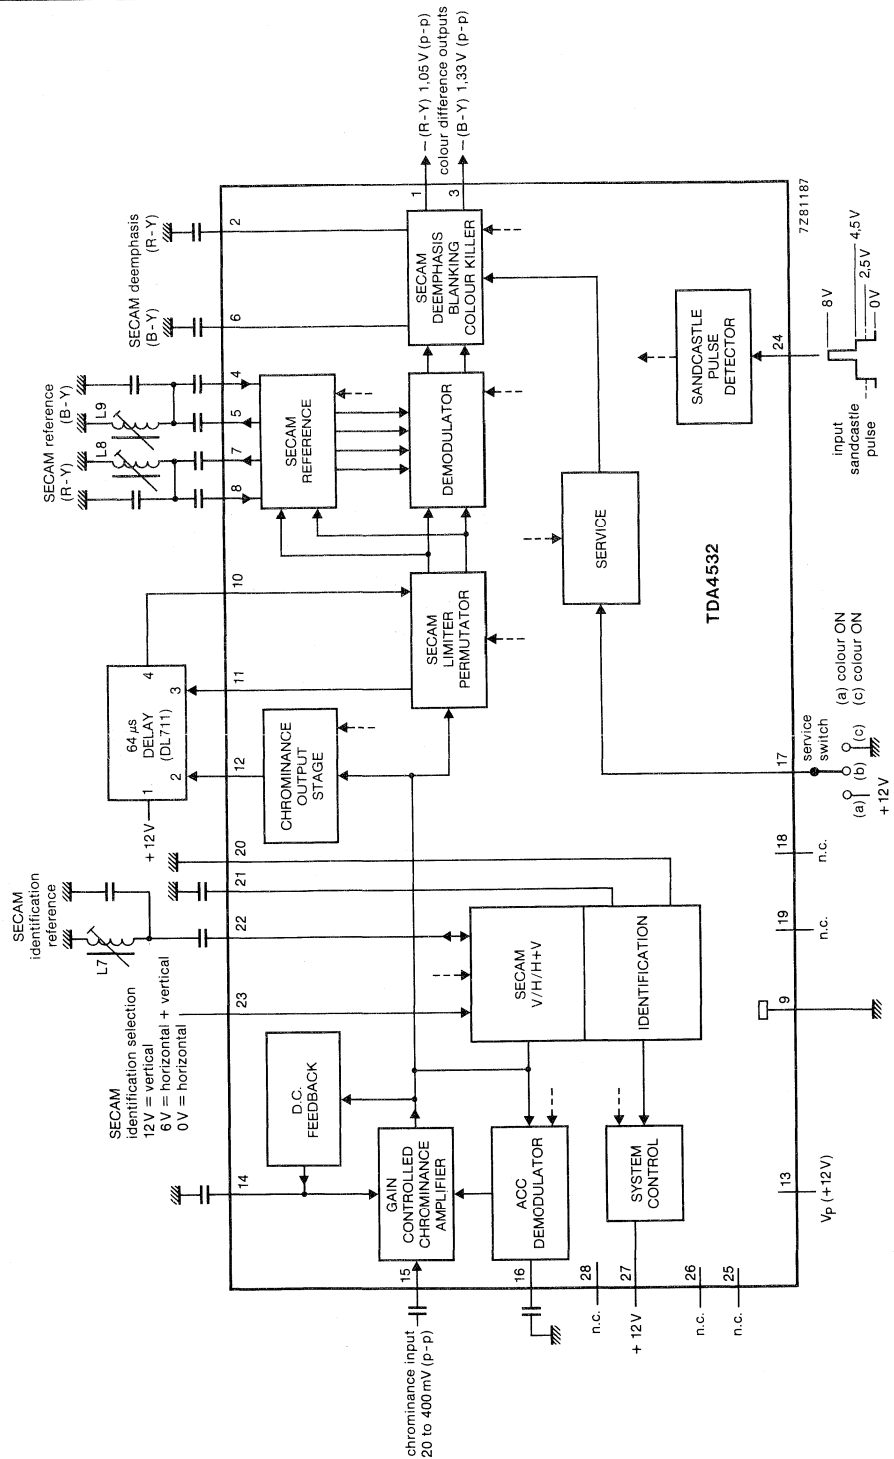

n.c. = not connected.

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 13)	$V_P = V_{13-9}$	max.	13,2 V
Voltage range at pins 10, 11, 17, 23, 24, 27 to pin 9 (ground)	$V_{n-9}$		0 to $V_P$ V
Current at pin 12	$I_{12}$	max.	10 mA
Total power dissipation	$P_{tot}$	max.	1,4 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

DEVELOPMENT DATA

## CHARACTERISTICS

$V_P = V_{13-9} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in Fig. 1; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 13)</b>					
Supply voltage range	$V_P = V_{13-9}$	10,8	—	13,2	V
Supply current	$I_P = I_{13}$	—	60	—	mA
<b>Chrominance part</b>					
Chrominance input signal (pin 15) input voltage (peak-to-peak value)	$V_{15-9(p-p)}$	20	100	400	mV
input impedance	$ Z_{15-9} $	2,3	3,3	—	k $\Omega$
Chrominance output signal (pin 12) output voltage (peak-to-peak value)	$V_{12-9(p-p)}$	—	1,6	—	V
output impedance (n-p-n emitter follower)	$ Z_{12-9} $	—	—	20	$\Omega$
d.c. output voltage	$V_{12-9}$	—	8,2	—	V
Input for delayed signal (pin 10) d.c. input current	$I_{10}$	—	—	10	$\mu\text{A}$
input resistance	$R_{10-9}$	10	—	—	k $\Omega$
<b>Demodulator part</b>					
Colour difference output signals (note 1) output voltage (proportional to $V_{13-9}$ ) (peak-to-peak value)					
—(R-Y) signal (pin 1)	$V_{1-9(p-p)}$	—	1,05*	—	V
—(B-Y) signal (pin 3)	$V_{3-9(p-p)}$	—	1,33*	—	V
Ratio of colour difference output signals —(R-Y)/—(B-Y)	$V_{1/3-9}$	0,71*	0,79*	0,87*	
Residual carrier (4 to 5 MHz) (peak-to-peak value)	$V_{1, 3-9(p-p)}$	—	20	30	mV
Residual carrier (8 to 10 MHz) (peak-to-peak value)	$V_{1, 3-9(p-p)}$	—	20	30	mV
H/2 ripple at —(R-Y) —(B-Y) outputs (peak-to-peak value) with $f_0$ signals	$V_{1, 3-9(p-p)}$	—	—	30	mV
D.C. output voltage	$V_{1, 3-9}$	—	7,7	—	V
Shift of inserted levels relative to levels of demodulated $f_0$ frequencies (IC only) with temperature	$\Delta V/\Delta T$	—	0,5*	0,6*	mV/K
with supply voltage	$\Delta V/\Delta V_P$	—	8,0*	15*	mV/K

\* Value measured without influence of external circuitry.

parameter	symbol	min.	typ.	max.	unit
Identification mode switch (pin 23)					
Input voltage for					
horizontal identification (H)	V <sub>23-9</sub>	—	—	2	V
vertical identification (V)	V <sub>23-9</sub>	10	—	—	V
combined (H) and (V) identification	V <sub>23-9</sub>	—	6**	—	V
Colour killer delay time					
colour ON	t <sub>dC1</sub>	—	—	3	field periods
colour OFF	t <sub>dC2</sub>	—	—	1	field periods
Service switch					
Switching voltage (pin 17)					
(for forced colour ON)					
connected to ground	V <sub>17-9</sub>	—	—	0,5	V
connected to supply voltage	V <sub>17-9</sub>	6	—	—	V
<b>Sandcastle pulse detector (note 2)</b>					
Input voltage pulse levels (pin 24)					
to separate vertical and horizontal blanking pulses	V <sub>24-9</sub>	1,3	1,6	1,9	V
required pulse amplitude	V <sub>24-9</sub>	2,0	2,5	3,0	V
to separate horizontal blanking pulse	V <sub>24-9</sub>	3,3	3,6	3,9	V
required pulse amplitude	V <sub>24-9</sub>	4,1	4,5	4,9	V
to separate burst gating pulse	V <sub>24-9</sub>	6,6	7,1	7,6	V
required pulse amplitude	V <sub>24-9</sub>	7,7	—	—	V
Input voltage during horizontal scanning	V <sub>24-9</sub>	—	—	1,1	V
Input current	-I <sub>24</sub>	—	—	100	μA

DEVELOPMENT DATA

**Notes to the characteristics**

1. The signal amplitude of the colour difference output signals  $-(R-Y)$  and  $-(B-Y)$  is dependent on the characteristics of the external tuned circuits at pins 7, 8 and 4, 5 respectively. Adjustment of the amplitude is achieved by varying the Q-factor of these tuned circuits. The resonant frequency must be adjusted such that the demodulated output frequency ( $f_0$ ) provides the same output level as the internally inserted reference voltage (achromatic value).
2. The sandcastle pulse is compared with three internal threshold levels, which are proportional to the supply voltage.

\*\* Or not connected.

APPLICATION INFORMATION

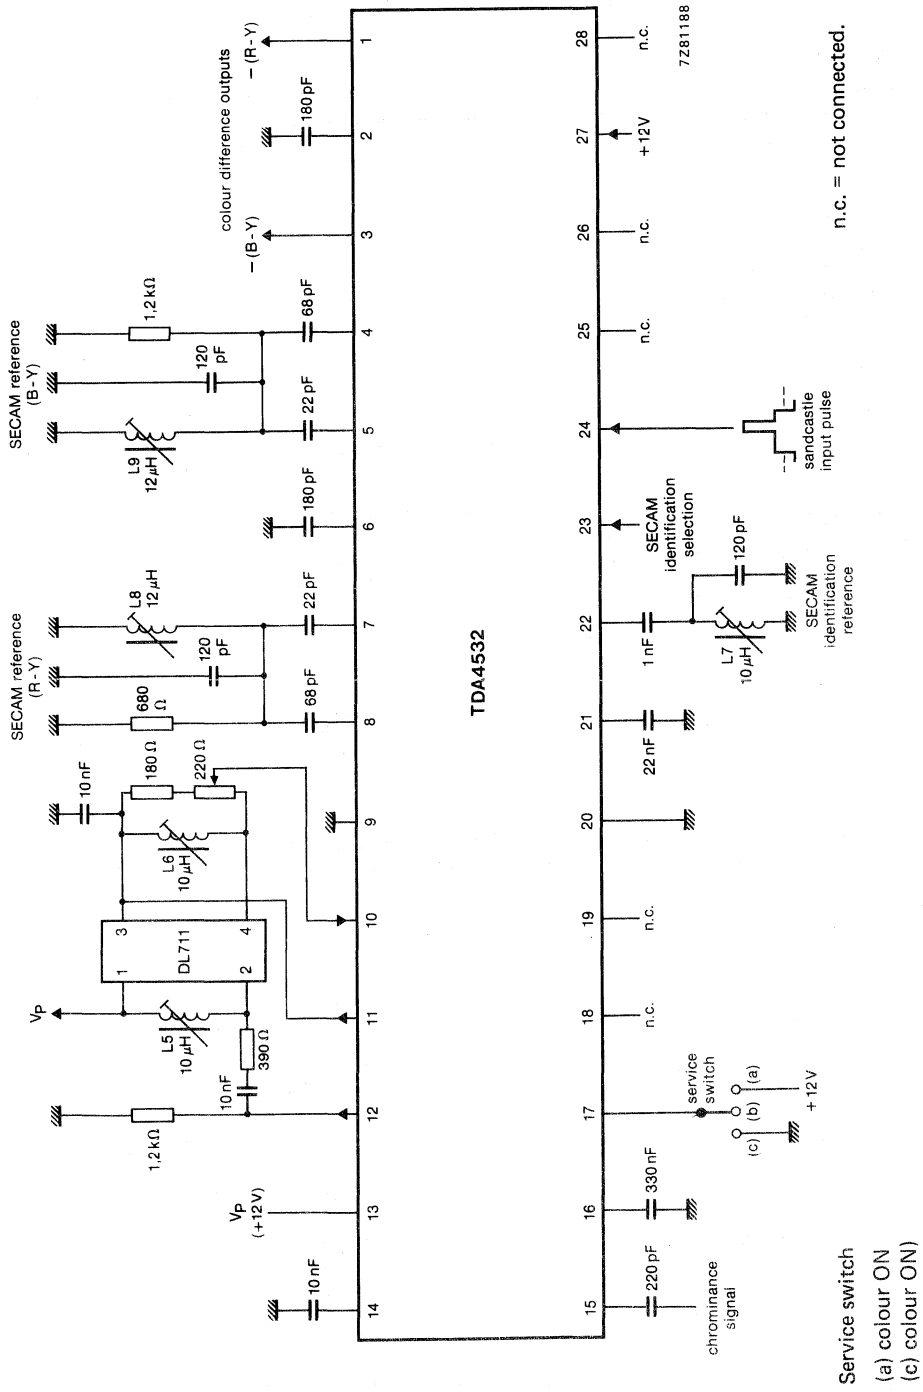


Fig. 2 Application diagram.

Service switch  
 (a) colour ON  
 (c) colour ON



## MULTISTANDARD DECODER

## GENERAL DESCRIPTION

The TDA4555 and TDA4556 are monolithic integrated multistandard colour decoders for the PAL, SECAM, NTSC 3,58 MHz and NTSC 4,43 MHz standards. The difference between the TDA4555 and the TDA4556 is the polarity of the colour difference output signals (B-Y) and (R-Y).

## Features

## Chrominance part

- Gain controlled chrominance amplifier for PAL, SECAM and NTSC
- ACC rectifier circuits (PAL/NTSC, SECAM)
- Burst blanking (PAL) in front of 64  $\mu$ s glass delay line
- Chrominance output stage for driving the 64  $\mu$ s glass delay line (PAL, SECAM)
- Limiter stages for direct and delayed SECAM signal
- SECAM permutator

## Demodulator part

- Flyback blanking incorporated in the two synchronous demodulators (PAL, NTSC)
- PAL switch
- Internal PAL matrix
- Two quadrature demodulators with external reference tuned circuits (SECAM)
- Internal filtering of residual carrier
- De-emphasis (SECAM)
- Insertion of reference voltages as achromatic value (SECAM) in the (B-Y) and (R-Y) colour difference output stages (blanking)

## Identification part


- Automatic standard recognition by sequential inquiry
- Delay for colour-on and scanning-on
- Reliable SECAM identification by PAL priority circuit
- Forced switch-on of a standard
- Four switching voltages for chrominance filters, traps and crystals
- Two identification circuits for PAL/SECAM (H/2) and NTSC
- PAL/SECAM flip-flop
- SECAM identification mode switch (horizontal, vertical or combined horizontal and vertical)
- Crystal oscillator with divider stages and PLL circuitry (PAL, NTSC) for double colour subcarrier frequency
- HUE control (NTSC)
- Service switch

## QUICK REFERENCE DATA

Supply voltage (pin 13)	$V_P = V_{13-9}$	typ.	12 V
Supply current (pin 13)	$I_P = I_{13}$	typ.	65 mA
Chrominance input signal (peak-to-peak)	$V_{15-9(p-p)}$		20 to 200 mV
Chrominance output signal (peak-to-peak)	$V_{12-9(p-p)}$	typ.	1,6 V
Colour difference output signals (peak-to-peak values)			
TDA4555: -(R-Y); TDA4556: + (R-Y)	$V_{1-9(p-p)}$	typ.	1,05 V $\pm$ 2 dB
TDA4555: -(B-Y); TDA4556: + (B-Y)	$V_{3-9(p-p)}$	typ.	1,33 V $\pm$ 2 dB
Sandcastle pulse; required amplitude for			
vertical and horizontal pulse separation	$V_{24-9}$	typ.	2,5 V
horizontal pulse separation	$V_{24-9}$	typ.	4,5 V
burst gating	$V_{24-9}$	typ.	7,7 V

## PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

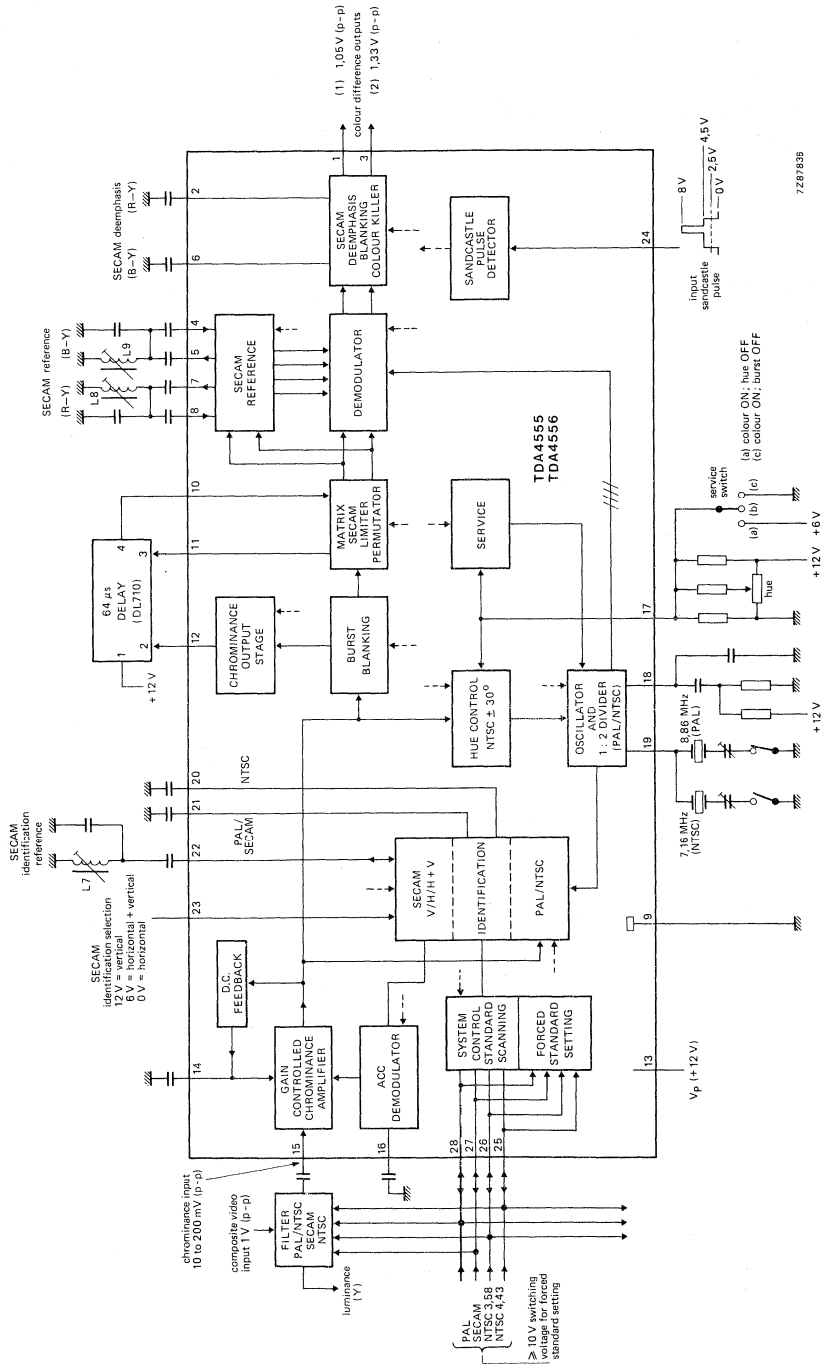

- (1) TDA4555: -(R-Y); TDA4556: + (R-Y)
- (2) TDA4555: -(B-Y); TDA4556: + (B-Y)

Fig. 1 Block diagram.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 13)	$V_P = V_{13-g}$	max.	13,2 V
Voltage range at pins 10, 11, 17, 23, 24, 25, 26, 27, 28 to pin 9 (ground)	$V_{n-9}$		0 to $V_P$ V
Current at pin 12	$I_{12}$	max.	8 mA
Peak value	$I_{12M}$	max.	15 mA
Total power dissipation	$P_{tot}$	max.	1,4 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

CHARACTERISTICS

$V_P = V_{13-9} = 12\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; measured in Fig. 1; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 13)</b>					
Supply voltage range	$V_P = V_{13-9}$	10,8	—	13,2	V
Supply current	$I_P = I_{13}$	—	65	—	mA
<b>Chrominance part</b>					
Chrominance input signal (pin 15)					
input voltage with 75% colour bar signal (peak-to-peak value)	$V_{15-9(p-p)}$	20	100	200	mV
input impedance	$ Z_{15-9} $	2,3	3,3	—	k $\Omega$
Chrominance output signal (pin 12)					
output voltage (peak-to-peak value)	$V_{12-9(p-p)}$	—	1,6	—	V
output impedance (n-p-n emitter follower)	$ Z_{12-9} $	—	—	20	$\Omega$
d.c. output voltage	$V_{12-9}$	—	8,2	—	V
Input for delayed signal (pin 10)					
d.c. input current	$I_{10}$	—	—	10	$\mu\text{A}$
input resistance	$R_{10-9}$	10	—	—	k $\Omega$
<b>Demodulator part (PAL/NTSC)</b>					
Colour difference output signals					
output voltage (proportional to $V_{13-9}$ ) (peak-to-peak value)					
TDA4555					
— (R-Y) signal (pin 1)	$V_{1-9(p-p)}$	—	1,05 V $\pm$ 2 dB	—	V
— (B-Y) signal (pin 3)	$V_{3-9(p-p)}$	—	1,33 V $\pm$ 2 dB	—	V
TDA4556					
+ (R-Y) signal (pin 1)	$V_{1-9(p-p)}$	—	1,05 V $\pm$ 2 dB	—	V
+ (B-Y) signal (pin 3)	$V_{3-9(p-p)}$	—	1,33 V $\pm$ 2 dB	—	V
Ratio of colour difference output signals (R-Y)/(B-Y)					
	$V_{1/3-9}$	—	0,79 $\pm$ 10%	—	
Residual carrier (subcarrier frequency) (peak-to-peak value)					
	$V_{1,3-9(p-p)}$	—	—	30	mV
Residual carrier (PAL only) (peak-to-peak value)					
	$V_{1,3-9(p-p)}$	—	10	—	mV
H/2 ripple at (R-Y) output (pin 1) (peak-to-peak value) without input signal					
	$V_{1-9(p-p)}$	—	—	10	mV
D.C. output voltage n-p-n emitter follower with internal current source of 0,3 mA output impedance					
	$V_{1,3-9}$	—	7,7	—	V
	$ Z_{1,3-9} $	—	—	150	$\Omega$

parameter	symbol	min.	typ.	max.	unit
<b>Demodulator part (SECAM)</b>					
Colour difference signals (see note 1)					
output voltage (proportional to $V_{13.9}$ ) (peak-to-peak value)					
TDA4555					
–(R-Y) signal (pin 1)	$V_{1.9(p-p)}$	–	1,05	–	V
–(B-Y) signal (pin 3)	$V_{3.9(p-p)}$	–	1,33	–	V
TDA4556					
+(R-Y) signal (pin 1)	$V_{1.9(p-p)}$	–	1,05	–	V
+(B-Y) signal (pin 3)	$V_{3.9(p-p)}$	–	1,33	–	V
Ratio of colour difference output signals (R-Y)/(B-Y)	$V_{1/3.9}$	–	0,79* $\pm$ 10%	–	
Residual carrier (4 to 5 MHz) (peak-to-peak value)	$V_{1,3.9(p-p)}$	–	20	30	mV
Residual carrier (8 to 10 MHz) (peak-to-peak value)	$V_{1,3.9(p-p)}$	–	20	30	mV
H/2 ripple at (R-Y) (B-Y) outputs (pins 1 and 3) (peak-to-peak value) with $f_0$ signals	$V_{1,3.9(p-p)}$	–	–	20	mV
D.C. output voltage	$V_{1,3.9}$	–	7,7	–	V
Shift of inserted levels relative to levels of demodulated $f_0$ frequencies (IC only)	$\Delta V/\Delta T(R-Y)$	–	–0,55	–	mV/K
	$\Delta V/\Delta T(B-Y)$	–	+0,25	–	mV/K
<b>HUE control (NTSC)/service switch</b>					
Phase shift of reference carrier					
at $V_{17.9} = 2$ V	$-\phi$	–	30**	–	deg
at $V_{17.9} = 3$ V	$\phi$	–	0	–	deg
at $V_{17.9} = 4$ V	$+\phi$	–	30**	–	deg
Input resistance	$R_{17.9}$	–	5	–	k $\Omega$
Service position					
Switching voltage (pin 17)					
burst OFF; colour ON (for oscillator adjustment)	$V_{17.9}$	–	–	0,5	V
HUE control OFF; colour ON (for forced colour ON)	$V_{17.9}$	6	–	–	V
<b>Crystal oscillator (pin 19)</b>					
For double colour subcarrier frequency					
input resistance	$R_{19.9}$	–	350	–	$\Omega$
lock-in-range referred to subcarrier frequency	$\Delta f$	$\pm 400$	–	–	Hz

\* Value measured without influence of external circuitry.

\*\* Relative to phase at  $V_{17.9} = 3$  V.

CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Identification part</b>					
Switching voltages for chrominance filters and crystals					
at pin 28 (PAL)					
at pin 27 (SECAM)					
at pin 26 (NTSC 3,58 MHz)					
at pin 25 (NTSC 4,43 MHz)					
Control voltage OFF state	$V_{25,26,27,28-9}$	—	—	0,5	V
Control voltage ON state					
during scanning; colour OFF	$V_{25,26,27,28-9}$	—	2,45	—	V
colour ON	$V_{25,26,27,28-9}$	—	5,8	—	V
Output current	$I_{25,26,27,28-9}$	—	—	3	mA
Voltage for forced switching ON					
PAL	$V_{28-9}$	9	—	—	V
SECAM	$V_{27-9}$	9	—	—	V
NTSC 3,58 MHz	$V_{26-9}$	9	—	—	V
NTSC 4,43 MHz	$V_{25-9}$	9	—	—	V
Delay time for					
restart of scanning	$t_{dS}$	2 to 3 vertical periods			
colour ON	$t_{dC1}$	2 to 3 vertical periods			
colour OFF	$t_{dC2}$	0 to 1 vertical periods			
SECAM identification (pin 23)					
Input voltage for					
horizontal identification (H)	$V_{23-9}$	—	—	2	V
vertical identification (V)	$V_{23-9}$	10	—	—	V
combined (H) and (V) identification	$V_{23-9}$	—	6*	—	V
Sequence of standard inquiry					
PAL-SECAM-NTSC 3,58 MHz-NTSC 4,43 MHz					
Reliable SECAM identification by PAL priority circuit					
Scanning time for each standard	$t_S$	4 vertical periods			

\* Or not connected.

parameter	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse detector (see note 2)</b>					
Input voltage pulse levels (pin 24) to separate vertical and horizontal blanking pulses	$V_{24-9}$	1,2	—	2,0	V
required pulse amplitude	$V_{24-9(p-p)}$	2,0	—	3,0	V
to separate horizontal blanking pulse	$V_{24-9}$	3,2	—	4,0	V
required pulse amplitude	$V_{24-9(p-p)}$	4,0	—	5,0	V
to separate burst gating pulse	$V_{24-9}$	6,5	—	7,7	V
required pulse amplitude	$V_{24-9(p-p)}$	7,7	—	$V_p$	V
Input voltage during horizontal scanning	$V_{24-9}$	—	—	1,0	V
Input current	$-I_{24}$	—	—	100	$\mu A$

**Notes to the characteristics**

1. The signal amplitude of the colour difference signals (R-Y) and B-Y) is dependent on the characteristics of the external tuned circuits at pins 7, 8 and 4, 5 respectively. Adjustment of the amplitude is achieved by varying the Q-factor of these tuned circuits. The resonant frequency must be adjusted such that the demodulated output frequency ( $f_o$ ) provides the same output level as the internally inserted reference voltage (achromatic value).
2. The sandcastle pulse is compared with three internal threshold levels, which are proportional to the supply voltage.

APPLICATION INFORMATION

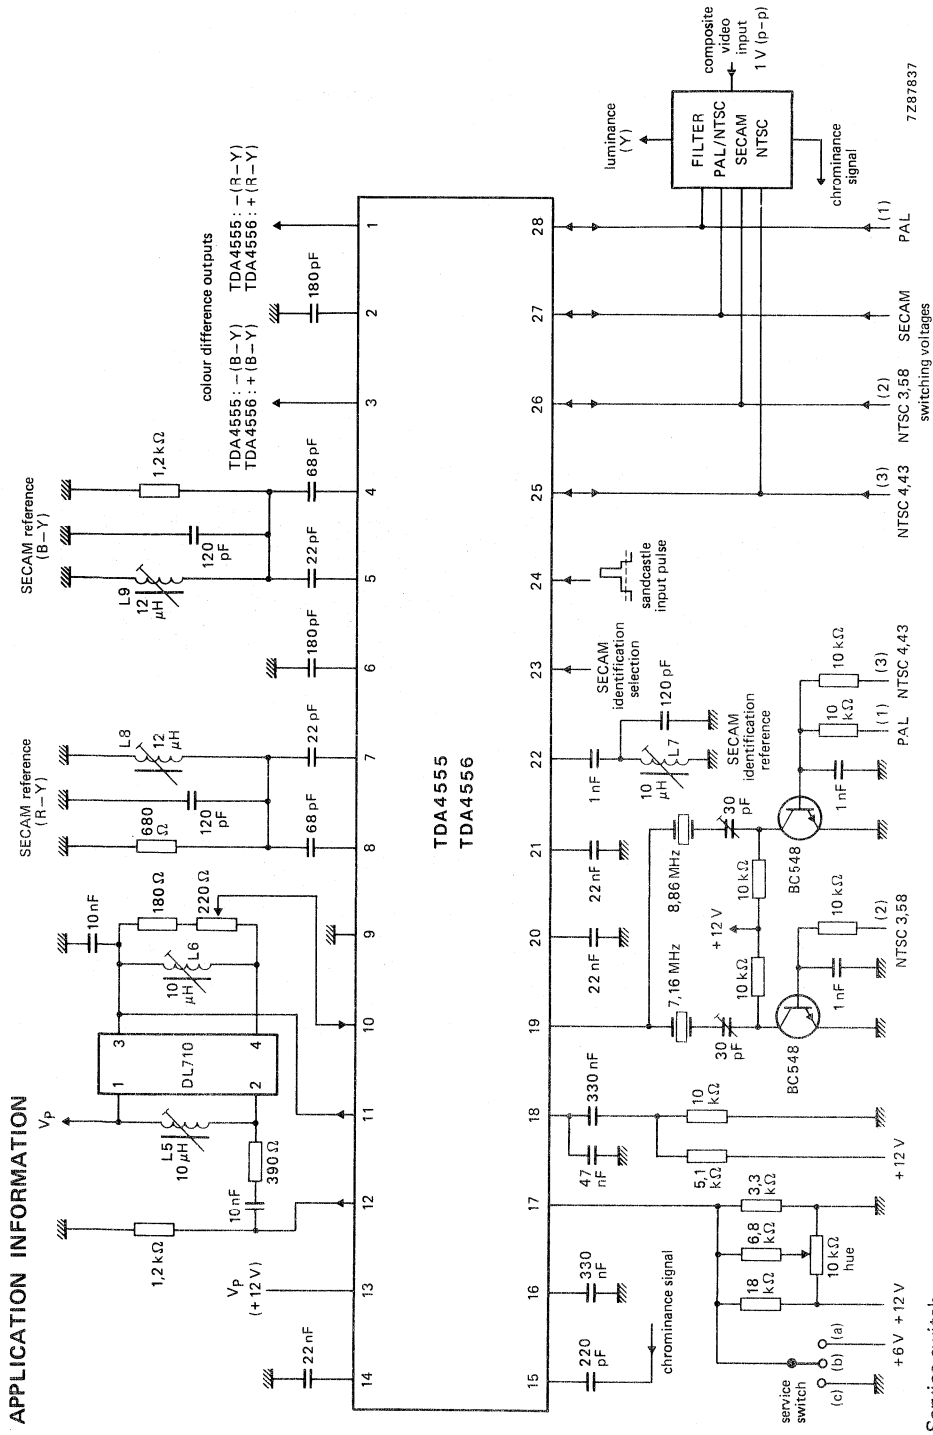


Fig. 2 Application diagram.

- Service switch  
 (a) colour ON; hue OFF  
 (c) colour ON; burst OFF

7Z87837



## COLOUR TRANSIENT IMPROVEMENT CIRCUIT

### GENERAL DESCRIPTION

The TDA4560 is a monolithic integrated circuit for colour transient improvement (CTI) and luminance delay line in gyrator technique in colour television receivers.

### Features


- Colour transient improvement for colour difference signals (R-Y) and (B-Y) with transient detecting-, storage- and switching stages resulting in high transients of colour difference output signals
- A luminance signal path (Y) which substitutes the conventional Y-delay coil with an integrated Y-delay line
- Switchable delay time from 720 ns to 1035 ns in steps of 45 ns
- Output for the option of velocity modulation

### QUICK REFERENCE DATA

Supply voltage (pin 10)	$V_P = V_{10-18}$	typ.	12 V
Supply current (pin 10)	$I_P = I_{10}$	typ.	35 mA
(R-Y) and (B-Y) attenuation	$\alpha_{cd}$	typ.	0 dB
(R-Y) and (B-Y) output transient time	$t_{tr}$	typ.	150 ns
Adjustable Y-delay time	$t_d$		720 to 1035 ns
Y-attenuation	$\alpha_Y$	typ.	7 dB

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

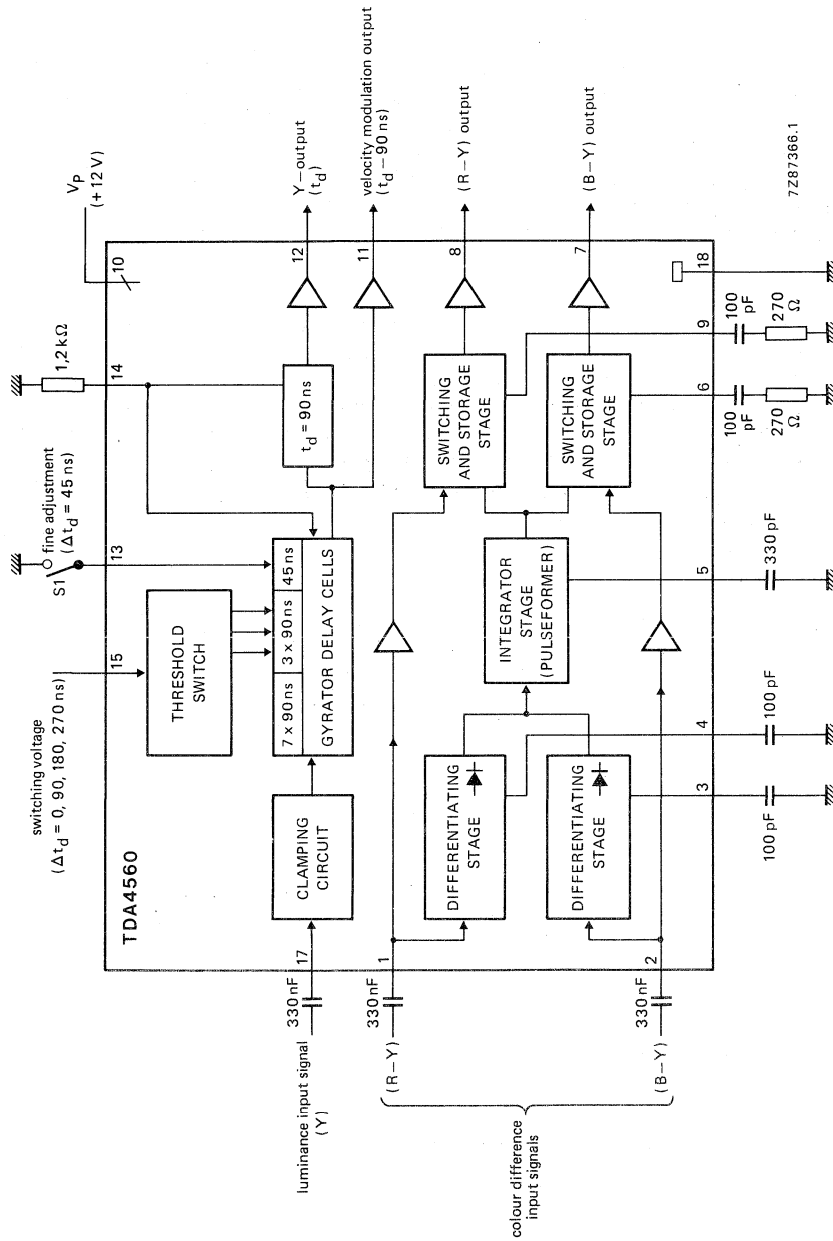

7287366.1

Fig. 1 Block diagram.

## FUNCTIONAL DESCRIPTION

The IC consists of two colour difference channels (B-Y) and (R-Y) and a luminance signal path (Y) as shown in Fig. 1.

### Colour difference channels

The (B-Y) and (R-Y) colour difference channels consist of a buffer amplifier at the input, a switching stage and an output amplifier. The switching stages, which are controlled by transient detecting stages (differentiators), switch to a value that has been stored at the beginning of the transients. The differentiating stages get their signal direct from the colour difference detecting signal (pins 1 and 2). Two parallel storage stages are incorporated in which the colour difference signals are stored during the transient time of the signal. After a time of about 600 ns they are switched immediately (transient time of 150 ns) to the outputs. The colour difference channels are not attenuated.

### Y-signal path

The Y-signal input (pin 17) is capacitively coupled to an input clamping circuit. Gyrator delay cells provide a maximum delay of 1035 ns including an additional delay of 45 ns via the fine adjustment switch (S1) at pin 13. Three delay cells are switched with two interstage switches dependent on the voltage at pin 15. Thus three switchable delay times of 90 ns, 180 ns or 270 ns less than the maximum delay time are available. A tuning compensation circuit ensures accuracy of delay time despite process tolerances. The Y-signal path has a 7 dB attenuation as a normal Y-delay coil and can replace this completely. The output is fed to pin 12 via a buffer amplifier. An additional output stage provides a signal of 90 ns less delay at pin 11 for the option of velocity modulation.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC)

Supply voltage (pin 10)	$V_P = V_{10-18}$	max.	13,2 V
Voltage ranges to pin 18 (ground)			
at pins 1,2,12,15	$V_{n-18}$		0 to $V_P$ V
at pin 11	$V_{11-18}$		0 to $(V_P - 3V)$ V
at pin 17	$V_{17-18}$		0 to 7 V
Voltage ranges			
at pin 7 to pin 6	$V_{7-6}$		0 to 5 V
at pin 8 to pin 9	$V_{8-9}$		0 to 5 V
Currents			
at pins 6,9	$\pm I_{6,9}$	max.	15 mA
at 17, 18, 111, 112			internally limited
Total power dissipation	$P_{tot}$	max.	1,1 W
Storage temperature range	$T_{stg}$		-25 to +150 °C
Operating ambient temperature range	$T_{amb}$		0 to +70 °C

### Note

Pins 3, 4, 5, 6, 9, 13 and 14 d.c. potential not published.

## CHARACTERISTICS

$V_P = V_{10-18} = 12 \text{ V}$ ;  $T_{amb} = 25 \text{ }^\circ\text{C}$ ; measured in application circuit Fig. 2; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 10)</b>					
Supply voltage	$V_P = V_{10-18}$	10,8	12	13,2	V
Supply current	$I_P = I_{10}$	—	35	50	mA
<b>Colour difference channels (pins 1 and 2);</b>					
(R-Y) input voltage (peak-to-peak value) 75% colour bar signal	$V_{1-18}$	—	1,05	—	V
(B-Y) input voltage (peak-to-peak value) 75% colour bar signal	$V_{2-18}$	—	1,33	—	V
Input resistance	$R_{1, 2-18}$	—	12	—	k $\Omega$
Internal bias (input)	$V_{1, 2-18}$	—	4,3	—	V
(B-Y), (R-Y) signal attenuation $\frac{V_8}{V_1}, \frac{V_7}{V_2}$	$\alpha_{cd}$	—	0	—	dB
Output voltage (d.c.)	$V_{7, 8-18}$	—	4,4	—	V
Output current (emitter follower with constant current source 0,65 mA)	$-I_{7,8}$	—	1,2	—	mA
(R-Y) and B-Y) output signal transient time	$t_{tr}$	—	150	—	ns
<b>Y-signal path (pin 17)</b>					
Y-input voltage (composite signal) (peak-to-peak value)	$V_{17-18(p-p)}$	—	1	—	V
Internal bias voltage (during clamping)	$V_{17-18}$	—	1,5	—	V
Input current					
during picture content	$I_{17}$	—	8	—	$\mu\text{A}$
during synchronizing pulse	$-I_{17}$	—	100	—	$\mu\text{A}$
Y-signal attenuation $\frac{V_{11}}{V_{17}}$	$\alpha_Y$	—	8	—	dB
Y-signal attenuation $\frac{V_{12}}{V_{17}}$	$\alpha_Y$	—	7	—	dB
Output voltage (d.c.)	$V_{11-18}$	—	2,3	—	V
Output voltage (d.c.)	$V_{12-18}$	—	10,3	—	V
Output current (emitter follower with constant current source 0,45 mA)	$-I_{11,12}$	—	1,2	—	mA
Frequency response (note 1) $R_{14-18} = 1,2 \text{ k}\Omega$ ; $V_{15-18} = 12 \text{ V}$	$f_{12-17}$	—	5	—	MHz


## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Y-signal path (pin 17)</b>					
Adjustable delay (note 2) (switch open)					
at $V_{15-18} = 0$ to 2,5 V; $R_{14-18} = 1,2 \text{ k}\Omega$	$t_d$	—	720	—	ns
at $V_{15-18} = 3,5$ to 5,5 V; $R_{14-18} = 1,2 \text{ k}\Omega$	$t_d$	—	810	—	ns
at $V_{15-18} = 6,5$ to 8,5 V; $R_{14-18} = 1,2 \text{ k}\Omega$	$t_d$	—	900	—	ns
at $V_{15-18} = 9,5$ to 12 V; $R_{14-18} = 1,2 \text{ k}\Omega$	$t_d$	—	990	—	ns
Fine adjustment delay (switch S1 closed)					
at $V_{13-18} = 0 \text{ V}$	$\Delta t_d$	—	45	—	ns
Signal delay for velocity modulation (pin 11)	t		$t_d - 90 \text{ ns}$		
<b>Thermal resistance</b>					
From junction to ambient (in free air)	$R_{th \text{ j-a}}$	—	—	70	K/W

## NOTES TO THE CHARACTERISTICS

1.  $R_{14-18}$  influences the bandwidth.
2. Delay time is proportional to resistor  $R_{14-18}$ .

APPLICATION INFORMATION

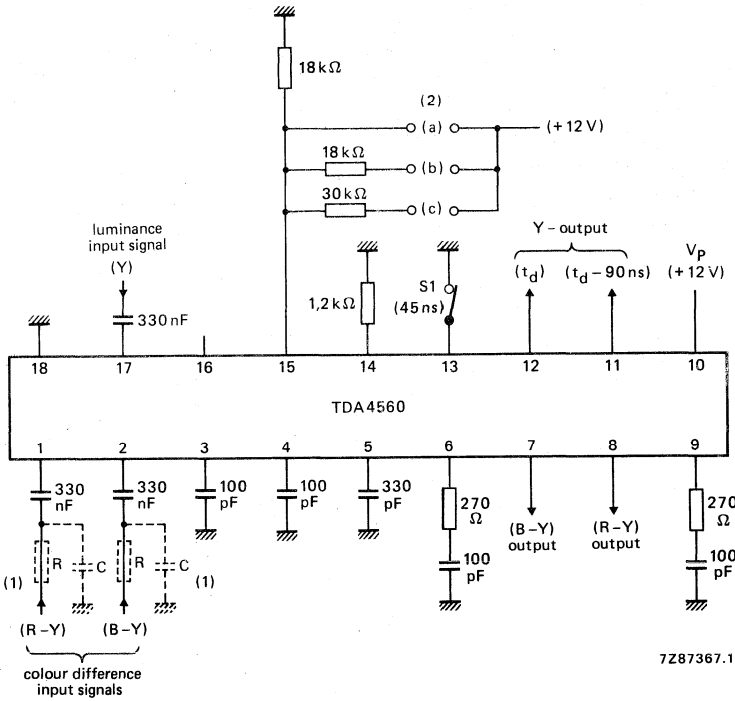

- (1) Residual carrier reduced to 20 mV peak-to-peak ( $R = 1\text{ k}\Omega$ ,  $C = 100\text{ pF}$ ).
- (2) Switching sequence for delay times shown in Table 1.

Fig. 2 Application diagram and test circuit.

Table 1 Switching sequence for delay times.

connection			voltage at pin 15	delay time (ns)*
(a)	(b)	(c)		
O	O	O	0 to 2,5 V	720
O	O	X	3,5 to 5,5 V	810
O	X	X	6,5 to 8,5 V	900
X	X	X	9,5 to 12 V	990

Where: X = connection closed; O = connection open.

\* When switch (S1) is closed the delay time is increased by 45 ns.

## NTSC DECODER

### GENERAL DESCRIPTION

The TDA4570 is an integrated 3,58 MHz or 4,43 MHz NTSC decoder. It is pin sequence compatible with multi-standard decoder TDA4555 and pin compatible with the PAL decoder TDA4510.

#### Features:

##### Chrominance part

- Gain controlled amplifier with operating point control stage
- ACC (automatic chrominance control) with sampled rectification during burst-key signal
- Blanking circuit for the colour burst signal

##### Oscillator and control voltage part

- Voltage controlled reference oscillator for double subcarrier frequency
- Divider stages which provide the correct  $90^\circ$  phase between  $-(R-Y)$  and  $-(B-Y)$  reference signals for the demodulators
- Phase comparator which controls the frequency and phase of the reference oscillator and compares the  $(R-Y)$  reference with the burst pulse
- HUE control stage provides phase shifting via the combined service and hue control input (pin 11)
- Identification demodulator provides a positive-going identification signal at pin 14 for NTSC signals and acts as the automatic colour killer
- Two-function service switch:
  - position one ( $V_{14.3} < 1\text{ V}$ ): switches the colour-ON and switches the hue control and burst for the PLL oscillator-OFF, allowing the adjustment of the reference oscillator
  - position two ( $V_{14.3} > 5\text{ V}$ ): switches the colour-ON, the hue control OFF and allows the output signal to be observed
- Sandcastle pulse detector for burst-gate, horizontal and horizontal/vertical blanking pulse detection. The vertical part of the sandcastle pulse is used for the internal colour-ON and colour-OFF delay
- Pulse processing part for the prevention of premature switching ON of the colour. The colour-ON delay, two or three field periods after identification of the NTSC signal, is achieved by a counter. When there is no identification voltage present the colour is switched OFF immediately or, at the most, one field period later.

##### Demodulator part

- Two synchronous demodulators for the  $(R-Y)$  and  $(B-Y)$  signals, which incorporate stages for the blanking during line and field flyback
- Internal filtering of the residual carrier in the demodulated colour difference signals
- Colour switching stages controlled by the pulse processing part in front of the output stages
- The output stages for  $(R-Y)$  and  $(B-Y)$  signals are low resistance n-p-n emitter followers
- Separate colour switching output

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

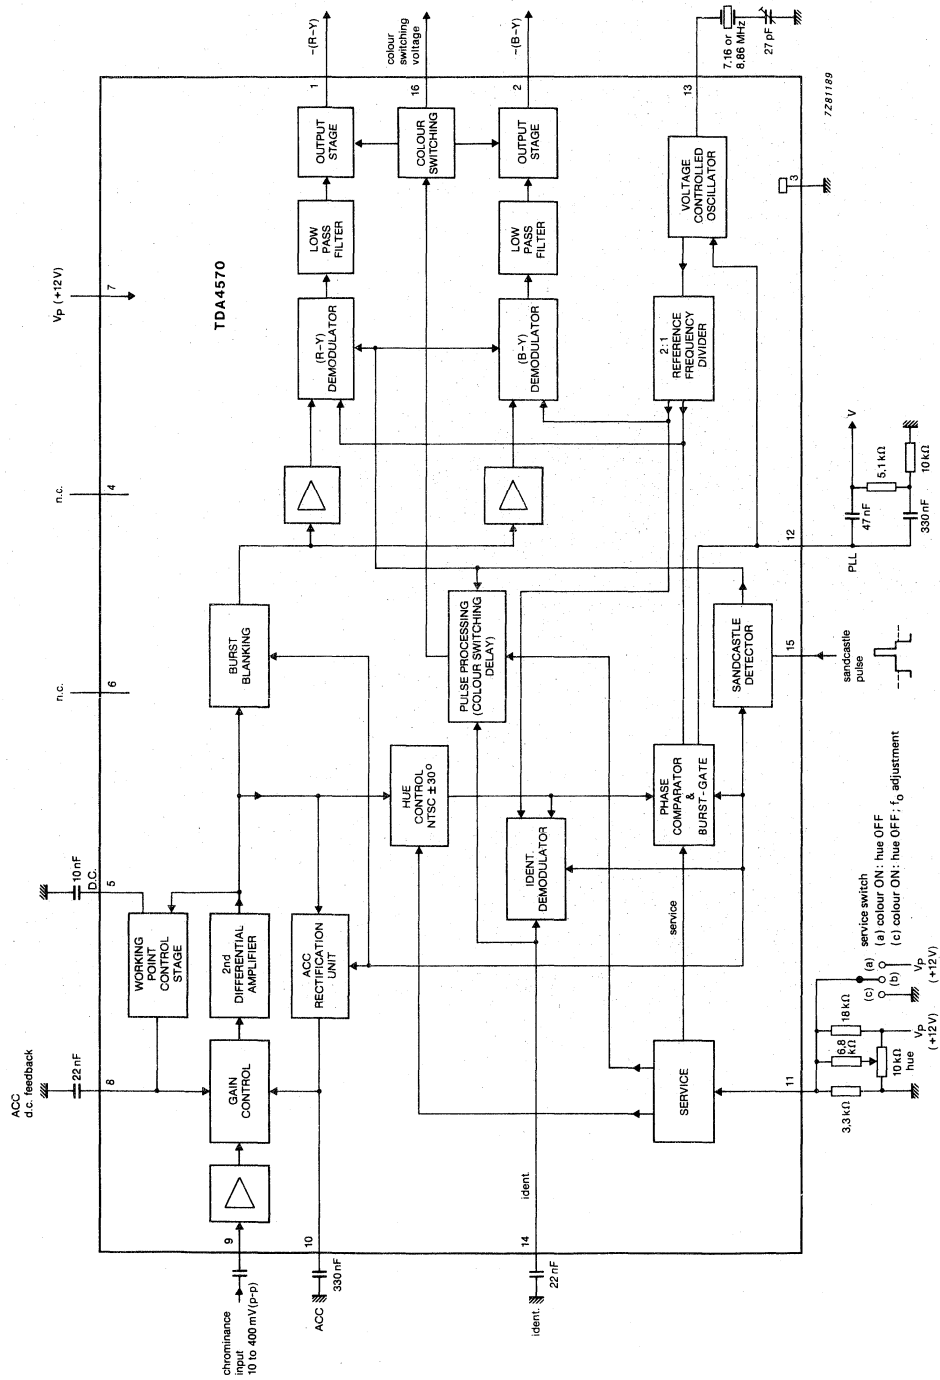


Fig. 1 Block diagram.



**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range	$V_P = V_{7-3}$	10,8 to 13,2 V
Currents at:		
pins 1 and 2	$-I_{1,2}$	max. 5 mA
pin 16	$-I_{16}$	max. 5 mA
Total power dissipation	$P_{tot}$	max. 800 mW
Storage temperature range	$T_{stg}$	-25 to +150 °C
Operating ambient temperature range	$T_{amb}$	0 to +70 °C

**THERMAL RESISTANCE**

From junction to ambient in free air	$R_{th\ j-a}$	max. 80 K/W
--------------------------------------	---------------	-------------

**CHARACTERISTICS** $V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; measured in Fig. 2 unless otherwise specified

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
Supply current	$I_P = I_7$	—	50	—	mA
<b>Chrominance part</b>					
Input voltage range (peak-to-peak value)	$V_{9-3(p-p)}$	10	—	400	mV
Nominal input voltage (peak-to-peak value) with 75% colour bar signal	$V_{9-3(p-p)}$	—	100	—	mV
Input impedance	$ Z_{9-3} $	—	3,3	—	k $\Omega$
Input capacitance	$C_{9-3}$	—	4,0	—	pF
<b>Oscillator and control voltage part</b>					
Oscillator frequency for subcarrier frequency					
3,58 MHz	$f_{osc}$	—	7,16	—	MHz
4,43 MHz	$f_{osc}$	—	8,86	—	MHz
Input resistance	$R_{13-3}$	—	350	—	$\Omega$
Catching range (depending on RC network between pins 12 and 3)	$\Delta f$	$\pm 300$	—	—	Hz
Control voltage without burst signal	$V_{14-3}$	—	6,0	—	V
colour switching threshold	$V_{14-3}$	—	6,6	—	V
hysteresis of colour switching	$V_{14-3}$	—	150	—	mV
Colour-ON delay	$t_{d\ on}$	—	—	3	*
Colour-OFF delay	$t_{d\ off}$	—	—	1	*

\* Expressed as field periods.

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
Colour switching output (open n-p-n emitter) output current	$-I_{16}$	—	—	5,0	mA
colour-ON voltage	$V_{16-3}$	—	6,0	—	V
colour-OFF voltage	$V_{16-3}$	—	0	—	V
<b>HUE control and service switches</b>					
Phase shift of reference carrier relative to the input signal $V_{11-3} = 3 \text{ V}$	$\phi$	-5	0	+5	deg
Phase shift of reference carrier relative to phase at $V_{11-3} = 3 \text{ V}$ $V_{11-3} = 2 \text{ V}$	$-\phi$	30	—	—	deg
$V_{11-3} = 4 \text{ V}$	$+\phi$	30	—	—	deg
Internal source (open pin)		—	3	—	V
First service position (PLL is inactive for oscillator adjustment, colour ON, HUE OFF)	$V_{11-3}$	0	—	1	V
Second service position (colour ON, HUE OFF)	$V_{11-3}$	5	—	$V_P$	V
<b>Demodulator part</b>					
Colour difference signals output voltage (peak-to-peak value)					
—(R-Y) signal	$V_{1-3(p-p)}$	0,84	1,05	1,32	V
—(B-Y) signal	$V_{2-3(p-p)}$	1,06	1,33	1,67	V
Ratio of colour difference output signals (R-Y)/(B-Y)	$\frac{V_{1-3}}{V_{2-3}}$	0,71	0,79	0,87	
D.C. voltage at colour difference outputs	$V_{1, 2-3}$	—	7,7	—	V
Residual carrier at colour difference outputs (peak-to-peak value)					
(1 x subcarrier frequency)	$V_{1, 2-3(p-p)}$	—	—	20	mV
(2 x subcarrier frequency)	$V_{1, 2-3(p-p)}$	—	—	30	mV

parameter	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse detector (note 1)</b>					
Input voltage level (pin 15) to separate vertical and horizontal blanking pulses	V <sub>15-3</sub>	1,3	1,6	1,9	V
required pulse amplitude to separate horizontal blanking pulse	V <sub>15-3</sub>	2,0	2,5	3,0	V
required pulse amplitude to separate burst gating pulse	V <sub>15-3</sub>	3,3	3,6	3,9	V
required pulse amplitude to separate burst gating pulse	V <sub>15-3</sub>	4,1	4,5	4,9	V
required pulse amplitude	V <sub>15-3</sub>	6,6	7,1	7,6	V
required pulse amplitude	V <sub>15-3</sub>	7,7	—	—	V
Input voltage during horizontal scanning	V <sub>15-3</sub>	—	—	1,1	V
Input current	-I <sub>15</sub>	—	—	100	μA

**Note**

1. The sandcastle pulse is compared with three internal threshold levels, which are proportional to the supply voltage.

DEVELOPMENT DATA

APPLICATION INFORMATION

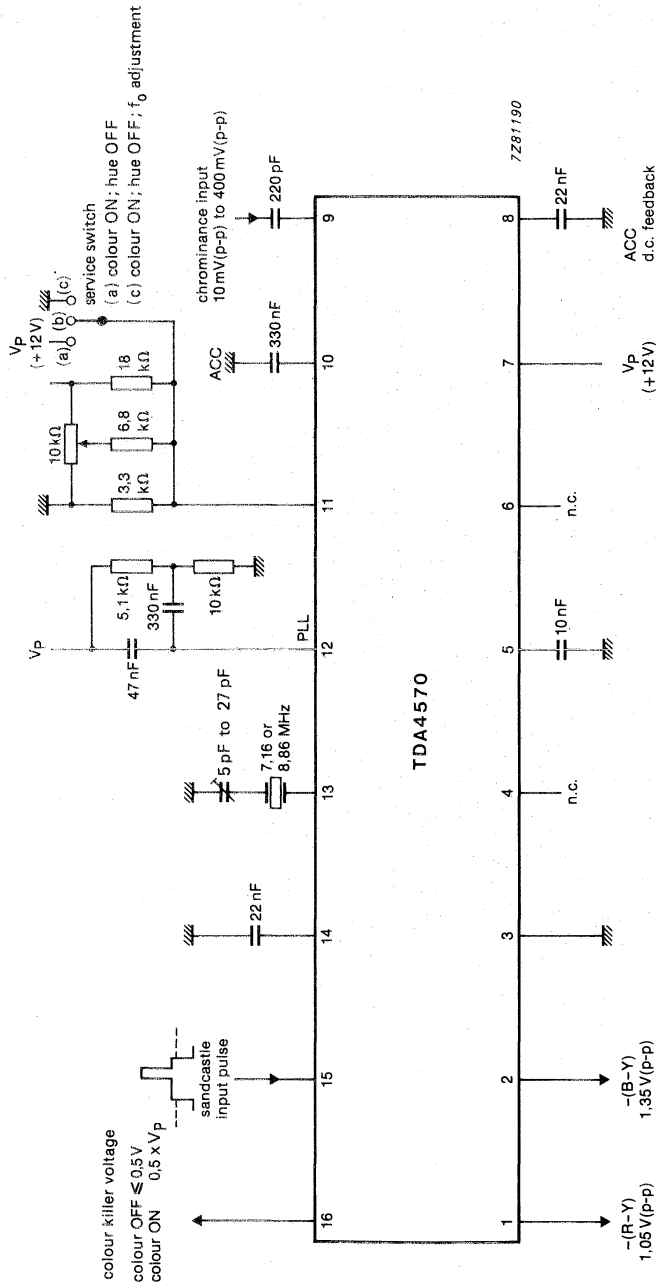


Fig. 2 Application diagram.

Crystal frequency 7, 16 or 8,86 MHz; resonance resistance 60 Ω; load capacitance 20 pF; dynamic capacitance 22 fF and static capacitance 5,5 pF.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA4580

## VIDEO CONTROL COMBINATION CIRCUIT

with automatic cut-off control

### GENERAL DESCRIPTION

The TDA4580 is a monolithic integrated circuit which performs video control functions in television receivers with a colour difference interface. For example it operates in conjunction the multistandard colour decoder TDA4555. The required input signals are: luminance and negative colour difference  $-(R-Y)$  and  $-(B-Y)$ , and a 3-level sandcastle pulse for control purposes. Analogue RGB signals can be inserted from two sources. One with full performance adjustment possibilities. RGB output signals are available for driving the video output stages. This circuit provides automatic cut-off control of the picture tube.

### Features

- Capacitive coupling of the colour difference, luminance and RGB input signals with black level clamping
- Two sets of analogue RGB inputs via fast switch 1 and fast switch 2
- First RGB inputs and fast switch 1 in accordance with peritelevision connector specification
- Saturation, contrast and brightness control acting on first RGB inputs
- Brightness control acting on second RGB inputs
- Equal black levels for television and inserted signals
- Clamping, horizontal and vertical blanking, and timing of automatic cut-off, controlled by a 3-level sandcastle pulse
- Automatic cut-off control with compensation for leakage current of the picture tube
- Measuring pulses of cut-off control start immediately after end of vertical part of sandcastle pulse
- Three selectable blanking intervals for PAL, SECAM and NTSC/PAL-M
- Two switch-on delays for run-in without discolouration
- Adjustable peak drive limiter
- Average beam current limiter
- G-Y and RGB matrix coefficients selectable for PAL/SECAM and NTSC (correction for FCC primaries)
- Bandwidth 10 MHz (typ.)
- Emitter-follower outputs for driving the RGB output stages

### QUICK REFERENCE DATA

Supply voltage (pin 6)	$V_p = V_{6-24}$	typ.	12 V
Supply current (pin 6)	$I_p = I_6$	typ.	110 mA
Luminance input (pin 15)			
Composite video input signal (VBS) (peak-to-peak value)	$V_{15-24(p-p)}$	typ.	0,45 V
Colour difference input signals (peak-to-peak values)			
$-(B-Y)$	$V_{18-24(p-p)}$	typ.	1,33 V
$-(R-Y)$	$V_{17-24(p-p)}$	typ.	1,05 V
Inserted RGB signals (black to white values)	$V_{14, 13, 12-24}$	typ.	0,7 V
Inserted RGB signals for teletext use (black to white values)	$V_{23, 22, 21-24}$	typ.	1 V
Three-level sandcastle pulse (required input voltage)	$V_{10-24}$	typ.	2,5/4,5/8,0 V

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

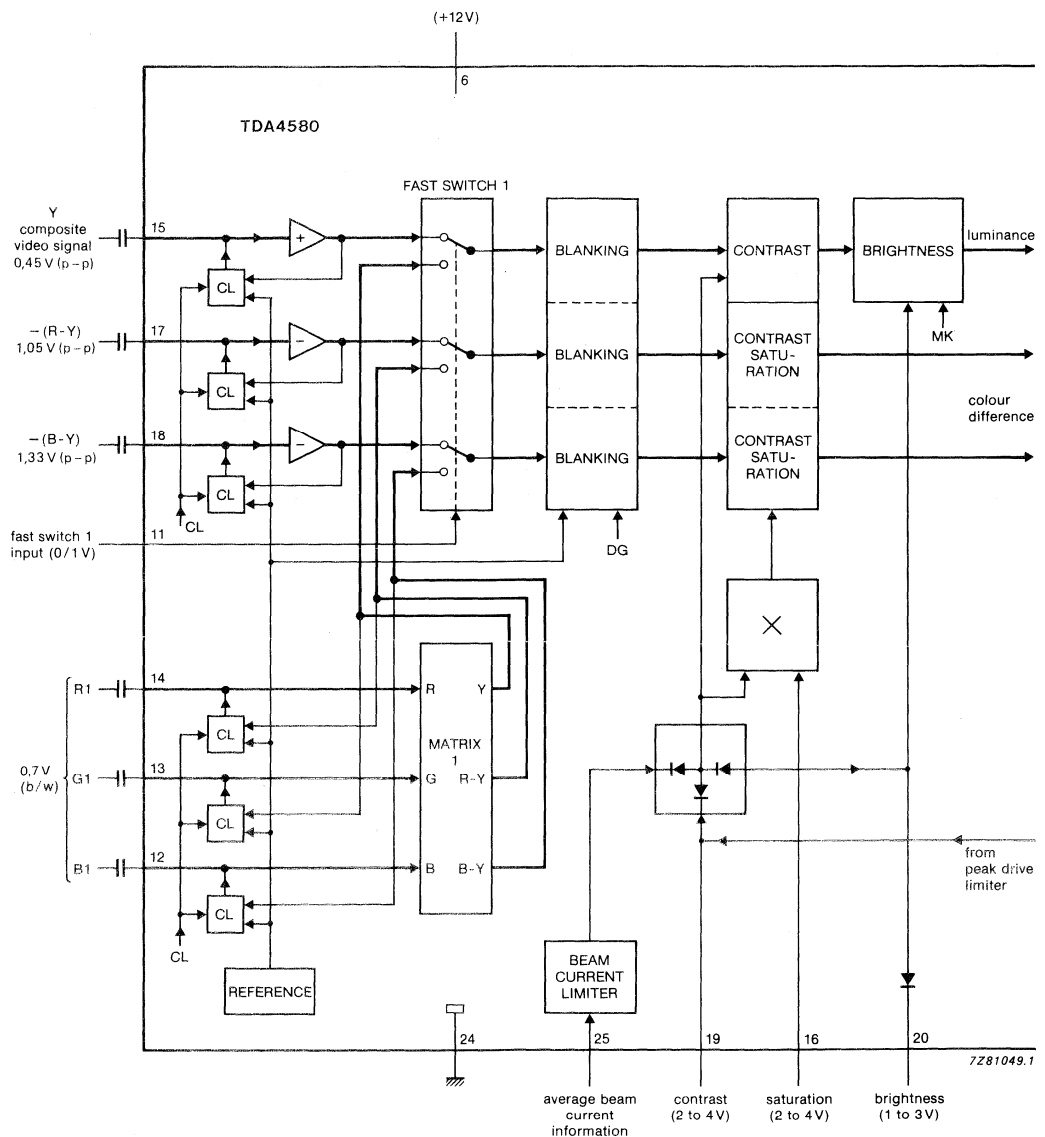


Fig. 1a Part of block diagram; continued in Fig. 1b.

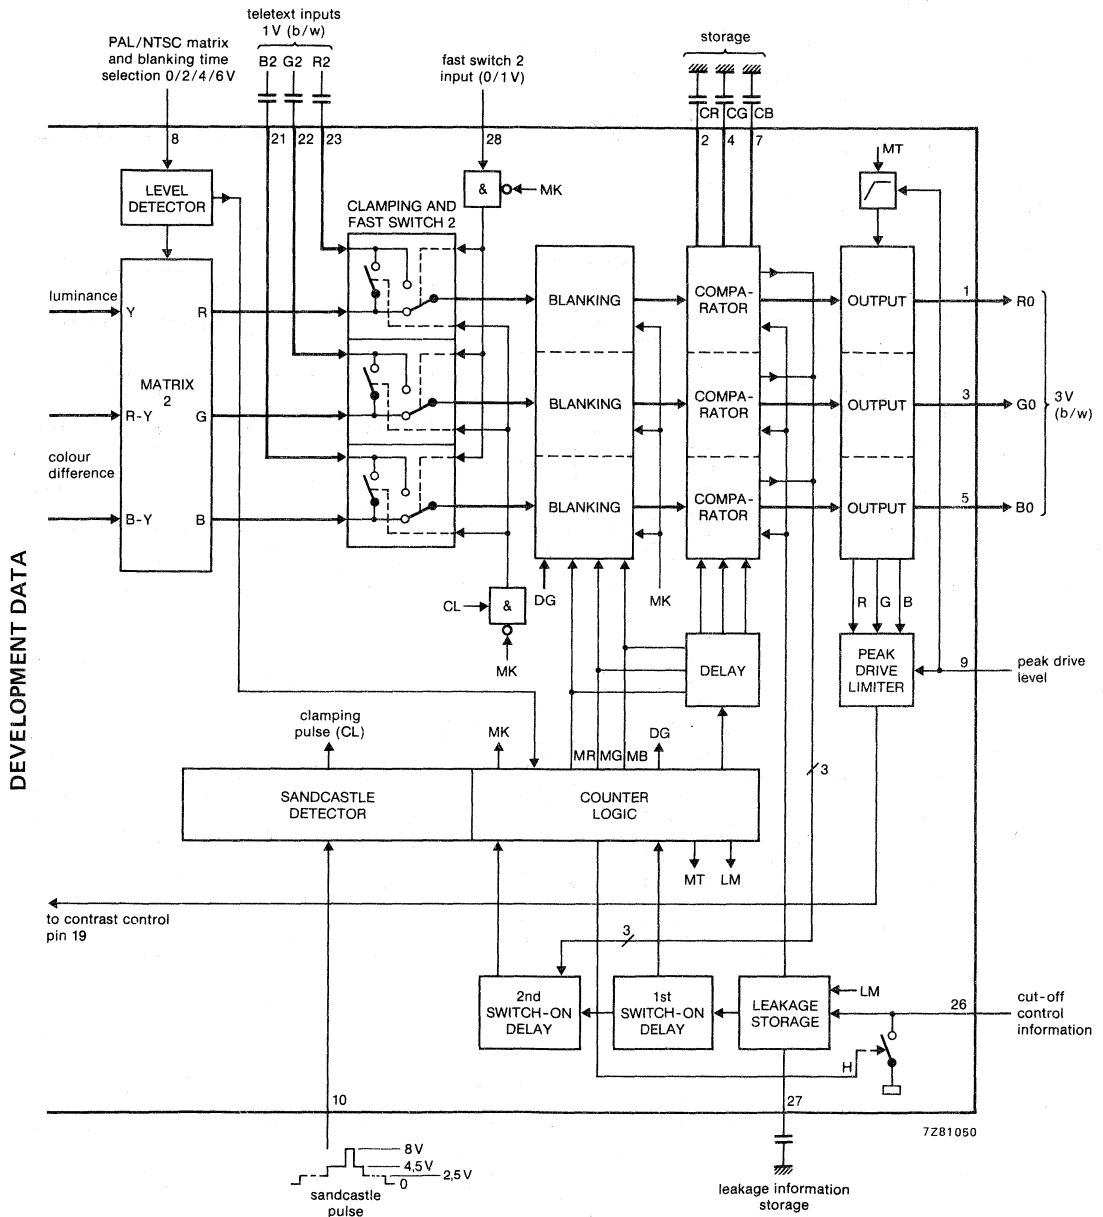


Fig. 1b Part of block diagram; continued from Fig. 1a.

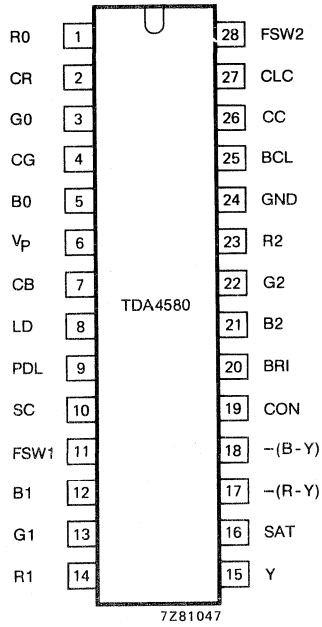


Fig. 2 Pinning diagram.



**PINNING**

pin no.	mnemonic	description
1	R0	Red output
2	CR	Red storage capacitor for cut-off control
3	G0	Green output
4	CG	Green storage capacitor for cut-off control
5	B0	Blue output
6	V <sub>p</sub>	Positive supply voltage (+ 12 V)
7	CB	Blue storage capacitor for cut-off control
8	LD	PAL/NTSC matrix and blanking time level detector input
9	PDL	Peak drive limiting input
10	SC	Sandcastle pulse input
11	FSW1	Fast switch 1 for Y, CD and RGB inputs
12	B1	Blue input (external signal)
13	G1	Green input (external signal)
14	R1	Red input (external signal)
15	Y	Luminance input
16	SAT	Saturation control input
17	-(R-Y)	Colour difference input -(R-Y)
18	-(B-Y)	Colour difference input -(B-Y)
19	CON	Contrast control input
20	BRI	Brightness control input
21	B2	Teletext blue input
22	G2	Teletext green input
23	R2	Teletext red input
24	GND	Ground
25	BCL	Average beam current limiting input
26	CC	Automatic cut-off control input
27	CLC	Storage capacitor for leakage current
28	FSW2	Fast switch 2 for teletext inputs

DEVELOPMENT DATA

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range (pin 6)	$V_P = V_{6-24}$	0 to 13,2 V
Voltage range at pins 2, 4, 7, 9, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 25, 27 to pin 24 (ground)	$V_{n-24}$	0 to $V_P$ V
Voltages ranges at pins 8, 11, 28	$V_{8, 11, 28-24}$	-0,5 to $V_P$ V
at pin 10	$V_{10-24}$	0 to $V_P + 0,7$ V
at pin 26	$V_{26-24}$	-0,7 to $V_P + 0,7$ V
Currents at pins 1, 3, 5 (average)	$-I_{1, 3, 5(AV)}$	max. 3 mA
at pins 1, 3, 5 (peak)	$-I_{1, 3, 5(M)}$	max. 10 mA
at pin 19 (average)	$I_{19(AV)}$	max. 5 mA
at pin 26	$I_{26}$	max. 1 mA
Total power dissipation	$P_{tot}$	max. 2 W
Storage temperature range	$T_{stg}$	-20 to + 150 °C
Operating ambient temperature range	$T_{amb}$	0 to + 70 °C

**THERMAL RESISTANCE**

From junction to ambient	$R_{th j-a}$	=	37 K/W
--------------------------	--------------	---	--------

**CHARACTERISTICS**

$V_P = 12\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; measured in a circuit similar to Fig. 4 at nominal settings (saturation, contrast, brightness), no beam current or peak drive limiting; all voltages with respect to pin 24 (ground) unless otherwise specified.

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Supply (pin 6)</b>					
Supply voltage range	$V_P = V_{6-24}$	10,8	—	13,2	V
Supply current	$I_P = I_6$	—	110	—	mA
<b>Colour difference inputs (pins 17 and 18)</b>					
—(R-Y) input signal at pin 17 (notes 1 and 2) (peak-to-peak value)	$V_{17-24(p-p)}$	—	1,05	—	V
—(B-Y) input signal at pin 18 (notes 1 and 2) (peak-to-peak value)	$V_{18-24(p-p)}$	—	1,33	—	V
Input current during scanning	$ I_{17, 18} $	—	—	0,3	$\mu\text{A}$
Input resistance	$R_{17, 18}$	5	—	—	$\text{M}\Omega$
Internal d.c. bias voltage during clamping time	$V_{17, 18-24}$	—	7,5	—	V
<b>Luminance input (pin 15; note 2)</b>					
Composite video input signal (VBS) (peak-to-peak value)	$V_{15-24(p-p)}$	—	0,45	—	V
Input current during scanning	$ I_{15} $	—	—	0,3	$\mu\text{A}$
Input resistance	$R_{15}$	5	—	—	$\text{M}\Omega$
Internal d.c. bias voltage during clamping time	$V_{15-24}$	—	7,4	—	V
<b>Signal switch 1 input (pin 11)</b>					
Input voltage level for insertion of Y and CD signals	$V_{11-24}$	—	—	0,4	V
RGB1 signals	$V_{11-24}$	0,9	—	3,0	V
Internal resistor to ground	$R_{11}$	—	10	—	$\text{k}\Omega$
<b>RGB1 inputs (R1 pin 14, G1 pin 13, B1 pin 12; note 2) (signals controlled by saturation, contrast and brightness)</b>					
Input signal (black to white value)	$V_{12, 13, 14-24}$	—	0,7	—	V
Input current during scanning	$ I_{12, 13, 14} $	—	—	0,3	$\mu\text{A}$
Input resistance	$R_{12, 13, 14}$	5	—	—	$\text{M}\Omega$
Internal d.c. bias voltage during clamping time	$V_{12, 13, 14-24}$	—	8,2	—	V

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>RGB/Y, (R-Y), (B-Y) – Matrix</b>					
Matrixed according to the equations					
$V_{(R-Y)} = 0,7 V_R - 0,59 V_G - 0,11 V_B$					
$V_{(B-Y)} = -0,3 V_R - 0,59 V_G + 0,89 V_B$					
$V_{(Y)} = 0,3 V_R + 0,59 V_G + 0,11 V_B$					
<b>Contrast control input (pin 19; note 3)</b> (contrast control acts on Y and CD signals or RGB1 signals respectively)					
Maximum contrast	$V_{19-24}$	–	4	–	V
Nominal contrast (6 dB below max.)	$V_{19-24}$	–	3	–	V
Attenuation of contrast at $V_{19-24} = 2$ V (related to max.)		–	22	–	dB
Input current at $V_{19-24} = 2$ to 4 V	$-I_{19}$	–	–	3	$\mu$ A
<b>Peak drive limiting input (pin 9; note 4)</b>					
Internal d.c. bias voltage	$V_{9-24}$	–	9	–	V
Input resistance at $V_{9-24} > 9$ V	$R_9$	–	10	–	k $\Omega$
Control current into contrast input (pin 19) during peak drive $V_{1, 2 \text{ or } 3-24} > V_{9-24}$	$I_{19}$	–	20	–	mA
<b>Average beam current limiting input (pin 25; note 5)</b>					
Start of contrast reduction at maximum contrast setting	$V_{25-24}$	–	8,5	–	V
Input range for full contrast reduction	$\Delta V_{25-24}$	–	1,0	–	V
Input resistance at $V_{25-24} < 6$ V	$R_{25}$	–	2,2	–	k $\Omega$
<b>Saturation control input (pin 16)</b> (saturation control acts on CD signals or RGB1 signals respectively)					
Maximum saturation	$V_{16-24}$	–	4	–	V
Nominal saturation (6 dB below max.)	$V_{16-24}$	–	3	–	V
Attenuation of saturation at $V_{16-24} = 1,8$ V (related to max. at 100 kHz)		50	–	–	dB
Input current at $V_{16-24} = 1,8$ to 4 V	$I_{16}$	–	–	10	$\mu$ A

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Brightness control input</b> (pin 20; note 6 and 7)					
Control voltage range	$V_{20-24}$	1	—	3	V
Input current at $V_{20-24} = 1$ to 3 V	$-I_{20}$	—	—	10	$\mu\text{A}$
Control voltage for nominal brightness	$V_{20-24}$	—	2,2	—	V
Change of black level in the control range related to the nominal output signal (black/white) for $\Delta V_{20-24} = 1$ V		—	33	—	%
Signal switched off and black level equal to cut-off measuring level at	$V_{20-24}$	11,5	—	—	V
<b>Y, (R-Y), (B-Y)/RGB – Matrix</b> (note 8)					
PAL matrix ( $V_{8-24} = < 4,5$ V)					
Matrixed according to the equation $V_{(G-Y)} = -0,51 V_{(R-Y)} - 0,19 V_{(B-Y)}$					
NTSC matrix ( $V_{8-24} = > 5,5$ V)					
(Adaption for NTSC-FCC primaries, nominal hue control set on $-50^\circ$ )					
Matrixed according to the equation $V_{(G-Y)^*} = -0,43 V_{(R-Y)} - 0,11 V_{(B-Y)}$ $V_{(R-Y)^*} = 1,57 V_{(R-Y)} - 0,41 V_{(B-Y)}$ $V_{(B-Y)^*} = V_{(B-Y)}$					
<b>RGB2 inputs (Teletext)</b> (R2 pin 23, G2 pin 22, B2 pin 21; note 2)					
(RGB signals controlled by brightness control)					
Input signal for 100% output signals (black to white value)	$V_{21, 22, 23-24}$	—	1	—	V
Input current during scanning	$I_{21, 22, 23}$	—	—	0,3	$\mu\text{A}$
Input resistance	$R_{21, 22, 23}$	5	—	—	$\text{M}\Omega$
<b>Signal switch 2 input</b> (pin 28)					
Input voltage level for insertion of Y, CD signals or RGB1 signals respectively RGB signals from matrix (note 9)	$V_{28-24}$	—	—	0,4	V
RGB2 signals (note 9)	$V_{28-24}$	0,9	—	3,0	V
Internal resistor to ground	$R_{28-24}$	—	10	—	$\text{k}\Omega$

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Automatic cut-off control input</b> (pin 26; note 10) (leakage current measuring time and insertion of RGB cut-off measuring lines see Fig. 5; types of ultra-black level see Fig. 3)					
Allowed maximum external D.C. bias voltage	$V_{26-24}$	5,5	—	—	V
Voltage difference between cut-off current measurement and leakage current measurement	$\Delta V_{26-24}$	—	0,5	—	V
Warm-up test pulse	$V_{1, 3, 5-24}$	—	$V_{9-24}^*$	—	V
Threshold for warm-up detector	$V_{26-24}$	—	8	—	V
<b>Storage input for leakage current</b> (pin 27)					
Internal resistance during leakage current measuring time (current limiting at $I_{27} = 0,2$ mA)	$R_{27}$	—	400	—	$\Omega$
Input current except during cut-off control cycle	$ I_{27} $	—	—	0,5	$\mu A$
<b>Storage inputs for automatic cut-off control</b> (pins 2, 4, 7)					
Charge and discharge currents	$ I_{2, 4, 7} $	—	0,3	—	mA
Input currents of storage inputs out of control time	$ I_{2, 4, 7} $	—	—	0,1	$\mu A$
<b>Switch input for PAL/NTSC matrix and vertical blanking time</b> (pin 8; note 11)					
Switching voltage input for					
PAL matrix and vertical blanking period of					
25 lines	$V_{8-24}$	—	0	0,5	V
22 lines	$V_{8-24}$	1,5	2	2,5	V
18 lines	$V_{8-24}$	3,5	4	4,5	V
NTSC matrix and vertical blanking period of					
18 lines	$V_{8-24}$	5,5	6	12	V
Input current	$I_8$	—	—	50	$\mu A$

\* Maximum 8 V.

DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>Sandcastle pulse detector</b> (pin 10; note 12)					
The following amplitudes are required for separating the various pulses:					
horizontal and vertical blanking pulses	V <sub>10-24</sub>	2,0	2,5	3,0	V
horizontal pulses for counter logic	V <sub>10-24</sub>	4,0	4,5	5,0	V
clamping pulses	V <sub>10-24</sub>	7,5	—	—	V
delay of leading edge of clamping pulse	t <sub>d</sub>	—	1	—	μs
Input current at V <sub>10-24</sub> = 0 V	-I <sub>10</sub>	—	—	100	μA
<b>Outputs for positive RGB signals</b> (R0 pin 1, G0 pin 3, B0 pin 5; note 13)					
Nominal signal amplitude (black/white)	V <sub>1, 3, 5-24</sub>	—	3	—	V
Spreads between channels		—	—	10	%
Maximum signal amplitude (black/white)	V <sub>1, 3, 5-24</sub>	4	—	—	V
Internal current source	I <sub>1, 3, 5</sub>	—	3	—	mA
Output resistance	R <sub>1, 3, 5</sub>	—	160	220	Ω
Minimum output voltage	V <sub>1, 3, 5-24</sub>	—	1	—	V
Maximum output voltage	V <sub>1, 3, 5-24</sub>	—	10	—	V
Horizontal and vertical blanking to ultra-black level 2 related to nominal signal black level in percentage of nominal signal amplitude		45	55	—	%
Vertical blanking to ultra-black level 1 related to cut-off measuring level in percentage of nominal signal amplitude		25	35	—	%
<i>Recommendation:</i>					
Range for cut-off measuring level 1,5 to 5,0 V; nominal value at 3 V (note 14)					
<b>Gain data</b> (note 15)					
Frequency response of Y path (0 to 8 MHz) pins 1, 3 and 5 to pin 15	d	—	—	3	dB
Frequency response of CD path (0 to 8 MHz) pin 1 to pin 17 = pin 5 to pin 18	d	—	—	3	dB
Frequency response of RGB1 path (0 to 8 MHz) pin 1 to pin 14 = pin 3 to pin 13 = pin 5 to pin 12	d	—	—	3	dB
Frequency response of RGB2 path (0 to 10 MHz) pin 1 to pin 23 = pin 3 to pin 22 = pin 5 to pin 21	d	—	—	3	dB

## Notes to the characteristics

1. The value of the colour difference input signals,  $-(B-Y)$  and  $-(R-Y)$ , is given for saturated colour bar with 75% of maximum amplitude.
2. Capacitive coupled to a low ohmic source; recommended value  $600 \Omega$  (max.).
3. At pin 19 for  $V_{19,24} \leq 2,0 \text{ V}$ , no further decrease of contrast is possible.
4. The peak drive limiting of output signals is achieved by contrast reduction. The limiting level of the output signals is equal to the voltage  $V_{9,24}$ , adjustable in the range 5 to 11 V. After exceeding the adjusted limiting level at peak drive limiter will not be active during the first line.
5. The average beam current limiting acts on contrast and at minimum contrast on brightness (the external contrast voltage at pin 19 is not affected).
6. At nominal brightness the black level at the output is  $0,3 \text{ V}$  ( $\hat{=}$  -10% of nominal signal amplitude) below the measuring level.
7. The internal control voltage can never be more positive than  $0,7 \text{ V}$  above the internal contrast voltage.
8. Matrix equation
 

$V(R-Y), V(B-Y)$	:	output of NTSC decoder of PAL type demodulating axis and amplitudes
$V(G-Y)^*, V(R-Y)^*, V(B-Y)^*$	:	for NTSC modified CD signals; equivalent to demodulation with the following axes and amplification factors:—
$(B-Y)^*$ demodulator axis		$0^\circ$
$(R-Y)^*$ demodulator axis		$115^\circ$ (PAL $90^\circ$ )
$(R-Y)^*$ amplification factor		1,97 (PAL 1,14)
$(B-Y)^*$ amplification factor		2,03 (PAL 2,03)

$$V(G-Y)^* = -0,27 V(R-Y)^* - 0,22 V(B-Y)^*$$
9. During clamping time, in each channel the black level of the inserted signal is clamped on the black level of the internal signal behind the matrix (dependent on brightness control).
10. During warm-up time of the picture tube, the RGB outputs (pins 1, 3 and 5) are blanked to minimum output voltage. An inserted white pulse during the vertical flyback is used for beam current detection. If the beam current exceeds the threshold of the warm-up detector at pin 26, the cut-off current control starts operating, but the video signal is still blanked. After run-in of the cut-off current control loop, the video signal will be released.  
 The first measuring pulse occurs in the first complete line after the end of the vertical part of the sandcastle pulse. The absolute minimum vertical part must contain 9 line-pulses. The cycle time of the counter is 63 lines. When the vertical pulse is longer than 61 lines, the IC is reset to the switch-on condition. In this event the video signal is blanked and the RGB-outputs are blanked to minimum output voltage as during warm-up time.  
 During leakage current measurement, all three channels are blanked to ultra-black level 1. With the measuring level only in the controlled channel, the other two channels are blanked to ultra-black level 1. The brightness control shifts both the signal black level and the ultra-black level 2. The brightness control is disabled from line 4 to the end of the last measuring line (see Fig. 3).  
 With the most adverse conditions (maximum brightness and minimum black level 2) the blanking level is located 30% of nominal signal amplitude below the cut-off measuring level.




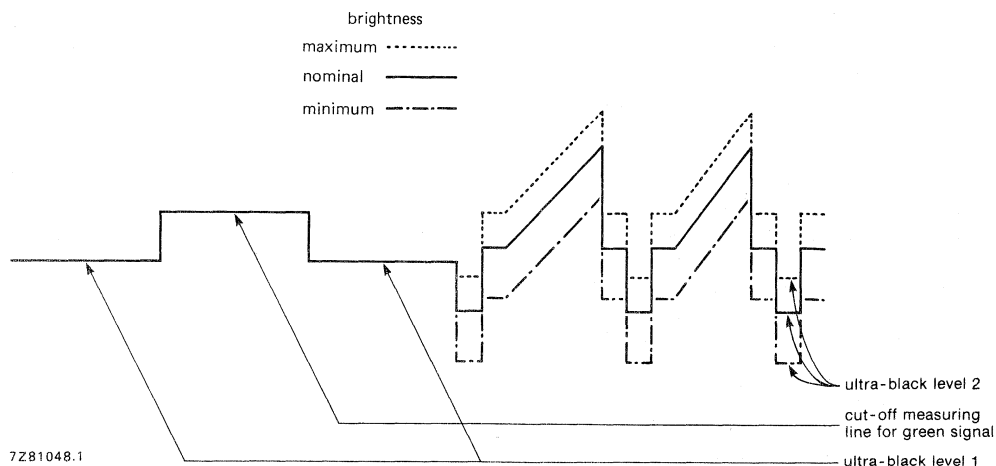


Fig. 3 Types of ultra-black levels.

DEVELOPMENT DATA

11. The given blanking times are valid for the vertical part of the sandcastle pulse of 9 to 15 lines. If the vertical part is longer and the cut-off lines are outside the vertical blanking period of 18, 22 or 25 lines respectively, the blanking of the signal ends with the end of last of the three cut-off measuring pulses as shown in Fig. 5.
12. The sandcastle pulse is compared with three internal thresholds (proportional to  $V_p$ ) to separate the various pulses. The internal pulses are generated when the input pulse at pin 10 exceeds the thresholds. The thresholds are for:
  - Horizontal and vertical blanking  $V_{10-24} = 1,5 \text{ V}$
  - Horizontal pulse  $V_{10-24} = 3,5 \text{ V}$
  - Clamping pulse  $V_{10-24} = 7,0 \text{ V}$
13. The outputs at pins 1, 3 and 5 are emitter followers with current sources and emitter protection resistors.
14. The value of the cut-off control range for the positive RGB output signals is given for a nominal output signal. If the signal amplitude is reduced, the cut-off range can be increased.
15. The gain data is given for a nominal setting of the contrast and saturation controls, measured without load at the RGB outputs (pins 1, 3 and 5).

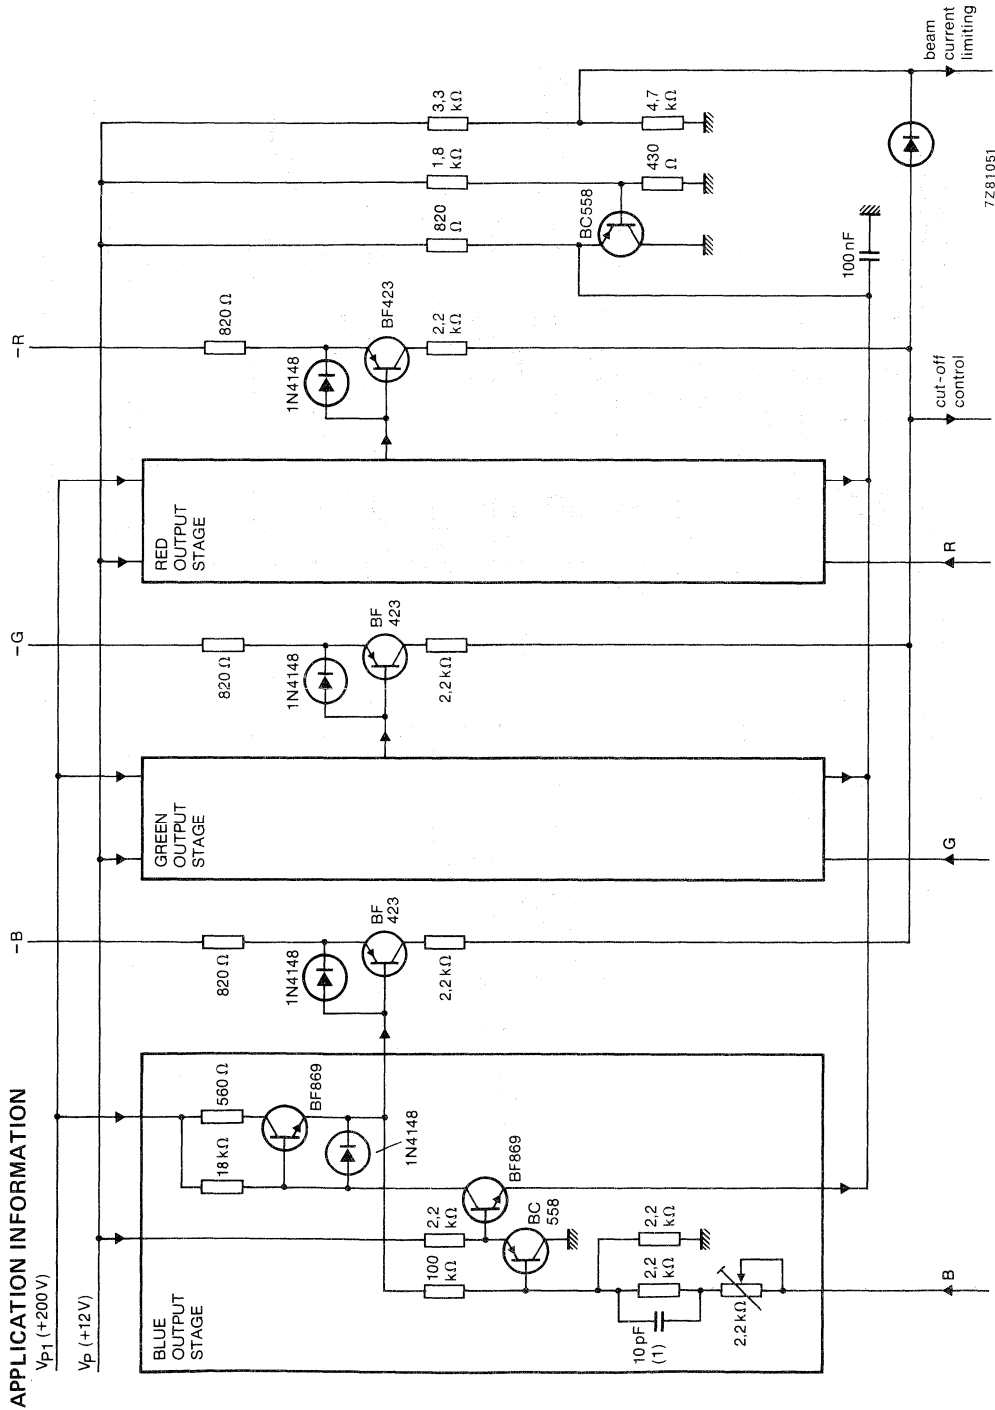

7Z81051

(1) Capacitor value depends on circuit layout.  
 Fig. 4a Part of typical application circuit diagram using the TDA4580; continued in Fig. 4b.


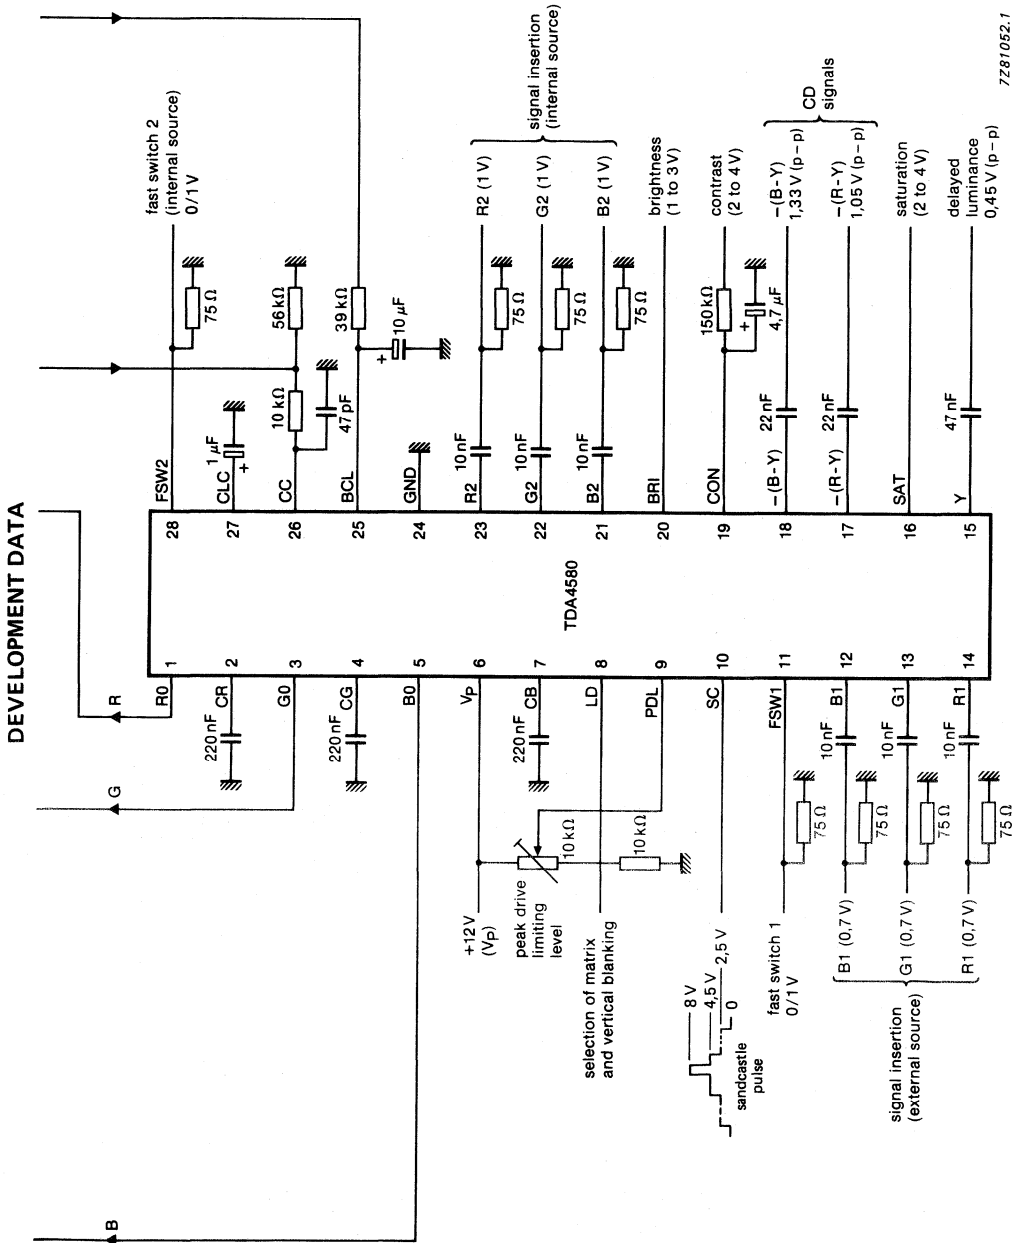


Fig. 4b Part of typical application circuit diagram using the TDA4580; continued from Fig. 4a.

APPLICATION INFORMATION (continued)

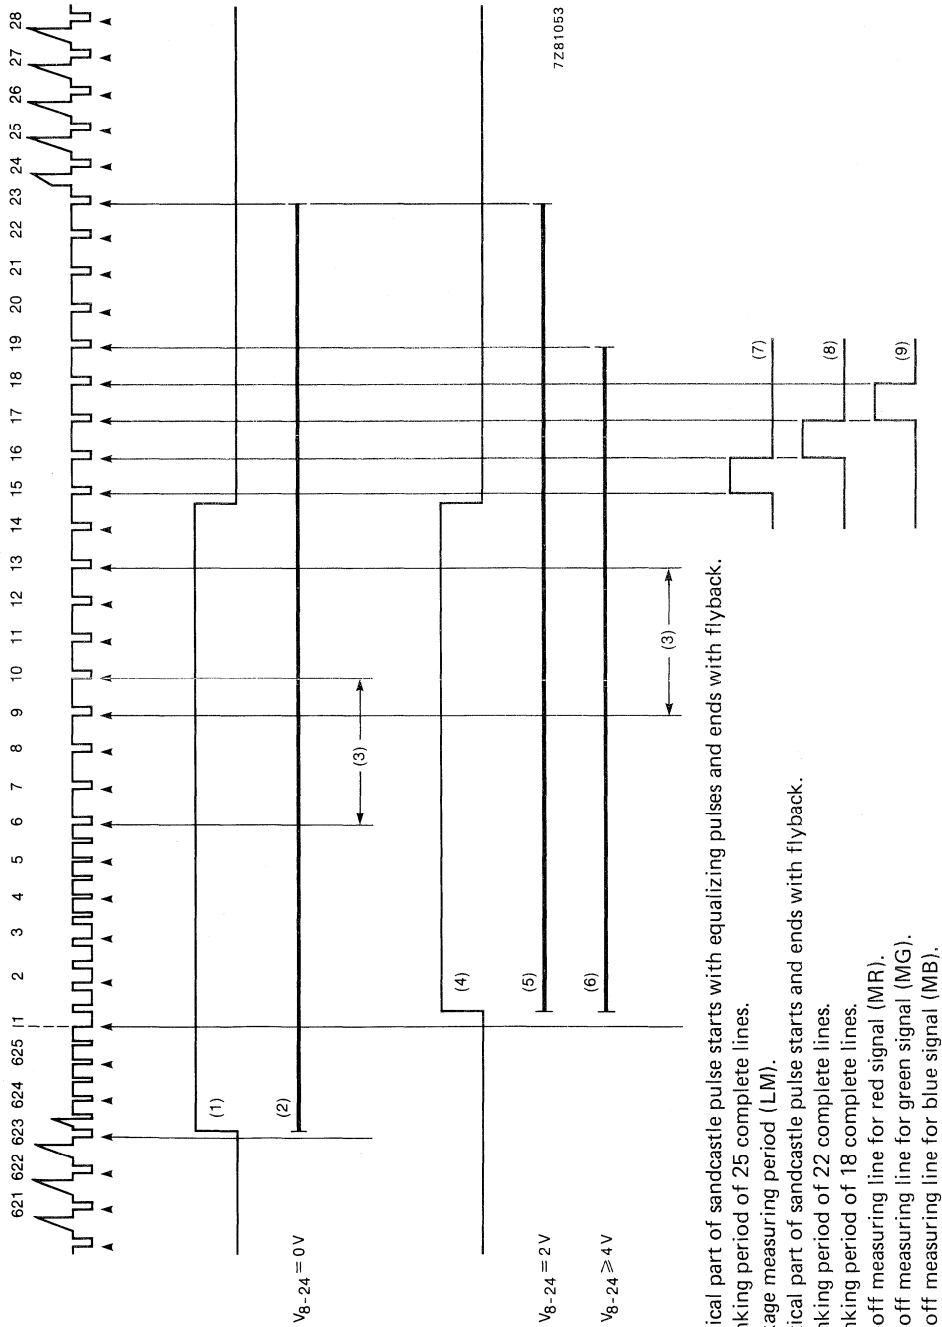

- (1) vertical part of sandcastle pulse starts with equalizing pulses and ends with flyback.
- (2) blanking period of 25 complete lines.
- (3) leakage measuring period (LM).
- (4) vertical part of sandcastle pulse starts and ends with flyback.
- (5) blanking period of 22 complete lines.
- (6) blanking period of 18 complete lines.
- (7) cut-off measuring line for red signal (MR).
- (8) cut-off measuring line for green signal (MG).
- (9) cut-off measuring line for blue signal (MB).

Fig. 5 Blanking and measuring lines.

## TV VHF MIXER/OSCILLATOR/UHF PREAMPLIFIER

## GENERAL DESCRIPTION

The TDA5030A provides VHF local oscillator, VHF mixer and UHF IF preamplifier functions for VHF/UHF television receivers. It includes a buffered output from the VHF local oscillator, a VHF/UHF switching circuit and an IF amplifier stage for an external SAW filter.

## Features

- Balanced VHF mixer
- Voltage-controlled VHF local oscillator
- IF amplifier for SAW filter
- UHF IF preamplifier
- Local oscillator buffer output for external prescaler
- Voltage stabilizer
- UHF/VHF switching circuit
- Electrostatic discharge protection diodes at pins 10, 11, 12 and 13

## QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage	pin 15	$V_p$	10	—	13,2	V
Supply current		$I_p$	—	42	—	mA
VHF mixer frequency range		$f$	50	—	470	MHz
Conversion gain			—	24,5	—	dB
Conversion noise	300 MHz		—	10	—	dB
Input signal for 1% cross modulation			—	99	—	dB $\mu$ V
Storage temperature range		$T_{stg}$	-55	—	+ 125	°C
Operating ambient temperature range		$T_{amb}$	-25	—	+ 85	°C

## PACKAGE OUTLINE

18-lead DIL, plastic (SOT-102H).

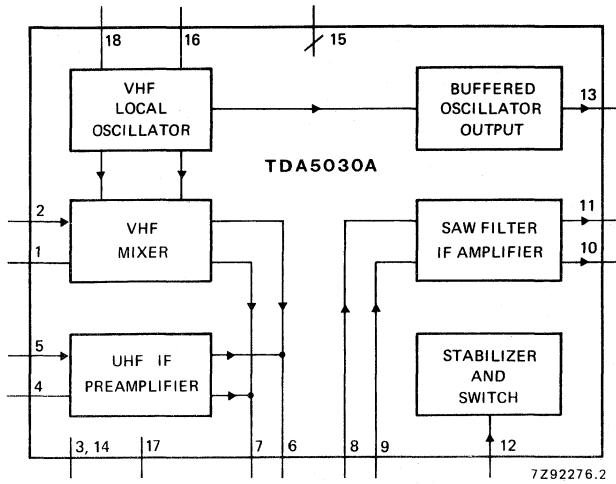


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage	pin 15	$V_P = V_{15-3}$	—	14	V
Input voltage	pins 1, 2, 4 and 5	$V_i$	0	5	V
VHF switching voltage	pin 12	$V_{12}$	0	$V_{15} + 0,3$	V
Output current	pins 10, 11 or 13	$-I_{10, 11, 13}$	—	10	mA
Short-circuit time on outputs	pins 10 and 11	$t_{ss}$	—	10	s
Storage temperature range		$T_{stg}$	-55	+ 125	°C
Operating ambient temperature range		$T_{amb}$	-25	+ 85	°C
Junction temperature range		$T_j$	—	+ 125	°C

**THERMAL RESISTANCE**

From junction to ambient

$R_{thj-a}$  55 K/W

## CHARACTERISTICS

Measured in circuit of Fig. 2,  $V_p = V_{15-3} = 12\text{ V}$ ,  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ , unless otherwise specified


parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage	pin 15	$V_{15-3}$	10	—	13,2	V
Supply current		$I_{15}$	—	42	55	mA
Switch voltage level for VHF	pin 12	$V_{12}$	0	—	2,5	V
Switch voltage level for UHF	pin 12	$V_{12}$	9,5	—	$V_{15} + 0,3$	V
Switch current	UHF selected	$I_{12}$	—	—	0,7	mA
<b>VHF mixer (including IF amplifier)</b>						
Frequency range		f	50	—	470	MHz
Noise factor	pin 2					
	f = 50 MHz	F	—	7,5	9	dB
	f = 225 MHz	F	—	9	10	dB
	f = 300 MHz	F	—	10	12	dB
	f = 470 MHz	F	—	11	13	dB
Optimum source conductance	pin 2					
	f = 50 MHz	G	—	0,5	—	mS
	f = 225 MHz	G	—	1,1	—	mS
	f = 300 MHz	G	—	1,2	—	mS
Input conductance	pin 2					
	f = 50 MHz	$G_i$	—	0,23	—	mS
	f = 225 MHz	$G_i$	—	0,5	—	mS
	f = 300 MHz	$G_i$	—	0,67	—	mS
Input capacitance	pin 2					
	f = 50 MHz	$C_i$	—	2,5	—	pF
Input voltage for 1% cross-modulation (in channel)		$V_{2-3}$	97	99	—	$\text{dB}\mu\text{V}$
Input voltage for 10 kHz pulling (in channel)	f < 300 MHz	$V_{2-14}$	100	—	—	$\text{dB}\mu\text{V}$
Voltage gain		$A_v$	22,5	24,5	26,5	dB

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>UHF preamplifier (including IF amplifier)</b>						
Input conductance	pin 5	$G_i$	—	0,3	—	mS
Input capacitance	pin 5	$C_i$	—	3,0	—	pF
Noise factor	pin 5	F	—	5	6	dB
Optimum source conductance	pin 5	G	—	3,3	—	mS
Input voltage for 1% cross-modulation (in channel)		$V_{5-14}$	88	90	—	dB $\mu$ V
Voltage gain		$A_v$	31,5	33,5	35,5	dB
<b>VHF mixer</b>						
Conversion transadmittance	pins 2 to 6,7	$Y_{c2-6,7}$	—	5,7	—	mS
Output impedance	pins 6 and 7	$Z_o$	—	1,6	—	k $\Omega$
<b>VHF oscillator</b>						
Frequency range		f	70	—	520	MHz
Frequency shift	$\Delta V_P = 10\%$ ; f = 70–330 MHz	$\Delta f$	—	—	200	kHz
Frequency drift	$\Delta T = 15$ K; f = 70–330 MHz	$\Delta f$	—	—	250	kHz
Frequency drift	between 5 s and 15 min after switch-on	$\Delta f$	—	—	200	kHz
<b>SAW filter IF amplifier</b>						
Input impedance	$Z_{10, 11} = 2$ k $\Omega$ ; f = 36 MHz	$Z_{8, 9}$	—	300+ j100	—	$\Omega$
Transimpedance		$Z_{8, 9-10, 11}$	—	2,2	—	k $\Omega$
Output reflection coefficient:	f = 36 MHz					
modulus			0,45	0,37	0,41	
phase			–63	–112	–134	deg



parameter	conditions	symbol	min.	typ.	max.	unit
<b>VHF local oscillator output buffer</b>						
Output voltage	pin 13					
	$R_L = 75 \Omega$ $f < 100 \text{ MHz}$	$V_{13}$	14	20	—	mV
	$f > 100 \text{ MHz}$	$V_{13}$	10	20	—	mV
Output impedance	$f = 100 \text{ MHz}$	$Z_{13}$	—	90	—	$\Omega$
RF signal on local oscillator output	$R_L = 75 \Omega$ $V_i = 1 \text{ V};$ $f \leq 225 \text{ MHz}$	$RF/(RF+LO)$	—	—	10	dB
	$V_i = 0,3 \text{ V};$ $f = 225\text{--}300 \text{ MHz}$	$RF/(RF+LO)$	—	—	10	dB
IF signal on local oscillator output	UHF selected; $R_L = 75 \Omega;$ $V_i = 350 \text{ mV}$	$IF/(IF+LO)$	—	—	3	mV
Local oscillator harmonics w.r.t. local oscillator output signal	$R_L = 75 \Omega$		—	—	-14	dB

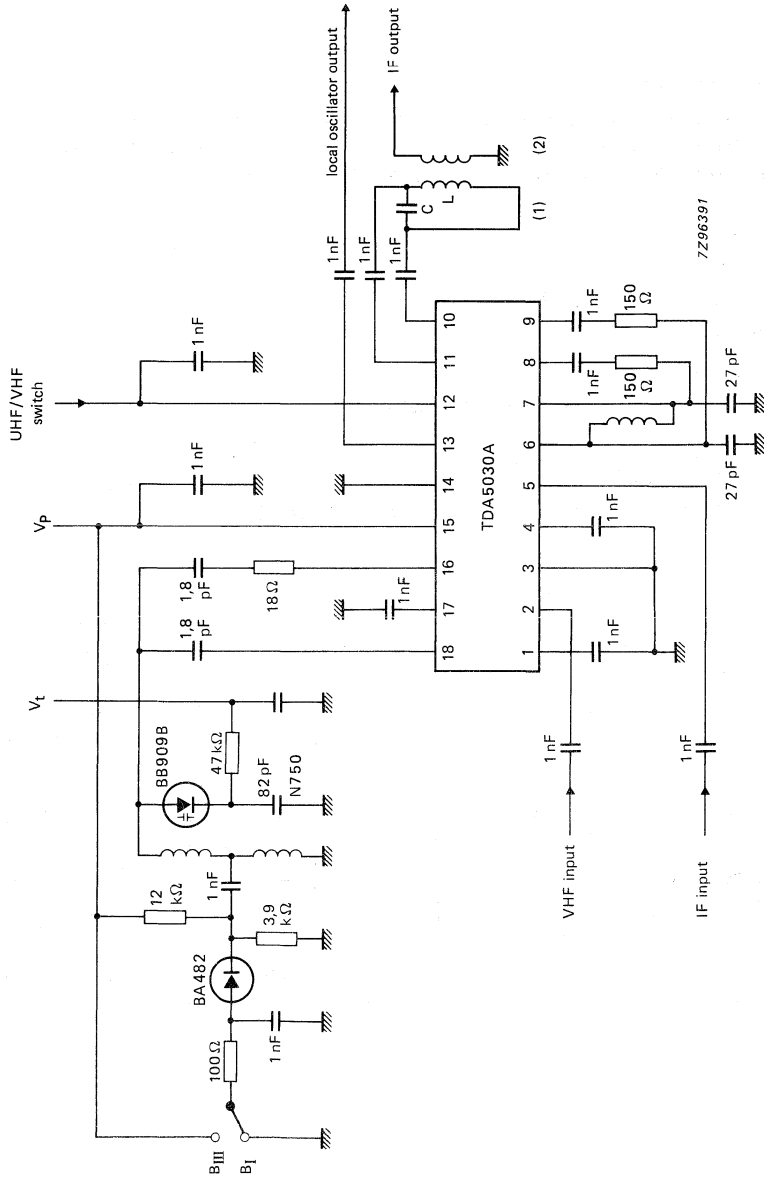

(1) C = 18 pF, L = 2.2 μH, f<sub>CL</sub> = 36.5 MHz.  
 (2) Turns ratio = 7 : 1, load = 50 Ω.

Fig. 2 Test circuit.

## TV VHF MIXER/OSCILLATOR/UHF PREAMPLIFIER

### GENERAL DESCRIPTION

The TDA5030AT provides VHF local oscillator, VHF mixer and UHF IF preamplifier functions for VHF/UHF television receivers. It includes a buffered output from the VHF local oscillator, a VHF/UHF switching circuit and an IF amplifier stage for an external SAW filter.

### Features

- Balanced VHF mixer
- Voltage-controlled VHF local oscillator
- IF amplifier for SAW filter
- UHF IF preamplifier
- Local oscillator buffer output for external prescaler
- Voltage stabilizer
- UHF/VHF switching circuit
- Electrostatic discharge protection diodes at pins 11, 12, 13 and 14

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage (pin 17)		$V_p$	10	—	13,2	V
Supply current		$I_p$	—	42	—	mA
VHF mixer frequency range		$f$	50	—	470	MHz
Conversion gain			—	25	—	dB
Conversion noise	300 MHz		—	10	—	dB
Input signal for 1% cross modulation			—	99	—	dB $\mu$ V
Storage temperature range		$T_{stg}$	-55	—	+ 125	°C
Operating ambient temperature range		$T_{amb}$	-25	—	+ 80	°C

### PACKAGE OUTLINE

20-lead mini-pack; plastic (SO-20; SOT-163A).

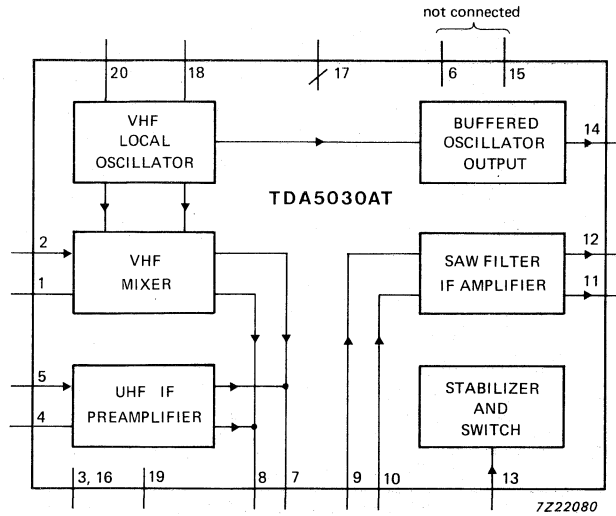


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage (pin 17)	$V_P = V_{17-3}$	—	14	V
Input voltage (pins 1, 2, 4 and 5)	$V_i$	0	5	V
VHF switching voltage (pin 13)	$V_{13}$	0	$V_P+0,3$	V
Output current (pins 11, 12 or 14)	$-I_{11,12,14}$	—	10	mA
Short-circuit time on outputs (pins 11, 12 and 14)	$t_{sc}$	—	10	s
Storage temperature range	$T_{stg}$	-55	+125	°C
Operating ambient temperature range	$T_{amb}$	-25	+80	°C
Junction temperature range	$T_j$	—	+150	°C

**THERMAL RESISTANCE**

From junction to ambient

$R_{th\ j-a}$  75 K/W

## CHARACTERISTICS


$V_p = V_{17-3} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in circuit of Fig. 2; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage (pin 17)		$V_{17-3}$	10	—	13,2	V
Supply current		$I_{17}$	—	42	55	mA
Switch voltage level for VHF (pin 13)		$V_{13}$	0	—	2,5	V
Switch voltage level for UHF (pin 13)		$V_{13}$	9,5	—	$V_p+0,3$	V
Switch current	UHF selected	$I_{13}$	-0,05	—	0,7	mA
<b>VHF mixer (including IF amplifier)</b>						
Frequency range		f	50	—	470	MHz
Noise factor (pin 2)	f = 50 MHz	NF	—	7,5	9	dB
	f = 225 MHz	NF	—	9	10	dB
	f = 300 MHz	NF	—	10	12	dB
	f = 470 MHz	NF	—	11	13	dB
Optimum source conductance (pin 2)	f = 50 MHz	G	—	0,5	—	mS
	f = 225 MHz	G	—	1,1	—	mS
	f = 300 MHz	G	—	1,2	—	mS
	f = 470 MHz	G	—	1,9	—	mS
Input conductance (pin 2)	f = 50 MHz	$G_i$	—	0,23	—	mS
	f = 225 MHz	$G_i$	—	0,5	—	mS
	f = 300 MHz	$G_i$	—	0,67	—	mS
	f = 470 MHz	$G_i$	—	1,45	—	mS
Input capacitance (pin 2)	f = 50 MHz	$C_i$	—	2,5	—	pF
Input voltage for 1% cross-modulation (in channel)		$V_{2-3}$	96	99	—	$\text{dB}\mu\text{V}$
Input voltage for 10 kHz pulling (in channel)	f < 300 MHz	$V_{2-16}$	100	—	—	$\text{dB}\mu\text{V}$
Input voltage for 100 kHz pulling	f = 470 MHz	$V_{2-3}$	73	—	—	$\text{dB}\mu\text{V}$
Voltage gain		$A_v$	23	25	27	dB

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>UHF preamplifier (including IF amplifier)</b>						
Input conductance (pin 5)		$G_i$	—	0,3	—	mS
Input capacitance (pin 5)		$C_i$	—	3,0	—	pF
Noise factor (pin 5)		NF	—	5	6	dB
Optimum source conductance (pin 5)		$G$	—	3,3	—	mS
Input voltage for 1% cross-modulation (in channel)		$V_{5-16}$	88	90	—	dB $\mu$ V
Voltage gain		$A_v$	32	34	36	dB
<b>VHF mixer</b>						
Conversion transadmittance (pins 2 to 7, 8)		$Y_{c2-7,8}$	—	5,7	—	mS
Output impedance (pins 7 and 8)		$Z_o$	—	1,6	—	k $\Omega$
<b>VHF oscillator</b>						
Frequency range		f	70	—	520	MHz
Frequency shift	$\Delta V_p = 10\%$ ; f = 70 to 330 MHz	$\Delta f$	—	—	200	kHz
Frequency drift	$\Delta T = 15$ K; f = 70 to 330 MHz	$\Delta f$	—	—	250	kHz
Frequency drift	between 5 s and 15 min after switch-on	$\Delta f$	—	—	200	kHz
<b>SAW filter IF amplifier</b>						
Input impedance	$Z_{11,12} = 2$ k $\Omega$ ; f = 36 MHz	$Z_{9,10}$	—	300+ j100	—	$\Omega$
Transimpedance		$Z_{9,10-11,12}$	—	2,2	—	k $\Omega$
Output reflection coefficient:	f = 36 MHz					
modulus			0,45	0,37	0,41	
phase			-63	-112	-134	deg

parameter	conditions	symbol	min.	typ.	max.	unit
<b>VHF local oscillator output buffer</b>						
Output voltage (pin 14)	$R_L = 75 \Omega$ $f < 100 \text{ MHz}$	$V_{14}$	14	20	—	mV
	$f > 100 \text{ MHz}$	$V_{14}$	10	20	—	mV
Output impedance	$f = 100 \text{ MHz}$	$Z_{14}$	—	90	—	$\Omega$
RF signal on local oscillator output	$R_L = 75 \Omega$ $V_i = 1 \text{ V};$ $f \leq 225 \text{ MHz}$	$RF/(RF+LO)$	—	—	10	dB
	$V_i = 0,3 \text{ V};$ $f = 225\text{--}300 \text{ MHz}$	$RF/(RF+LO)$	—	—	10	dB
IF signal on local oscillator output	UHF selected; $R_L = 75 \Omega;$ $V_i = 350 \text{ mV}$	$IF/(IF+LO)$	—	—	3	mV
Local oscillator harmonics w.r.t. local oscillator output signal	$R_L = 75 \Omega$		—	—	-14	dB

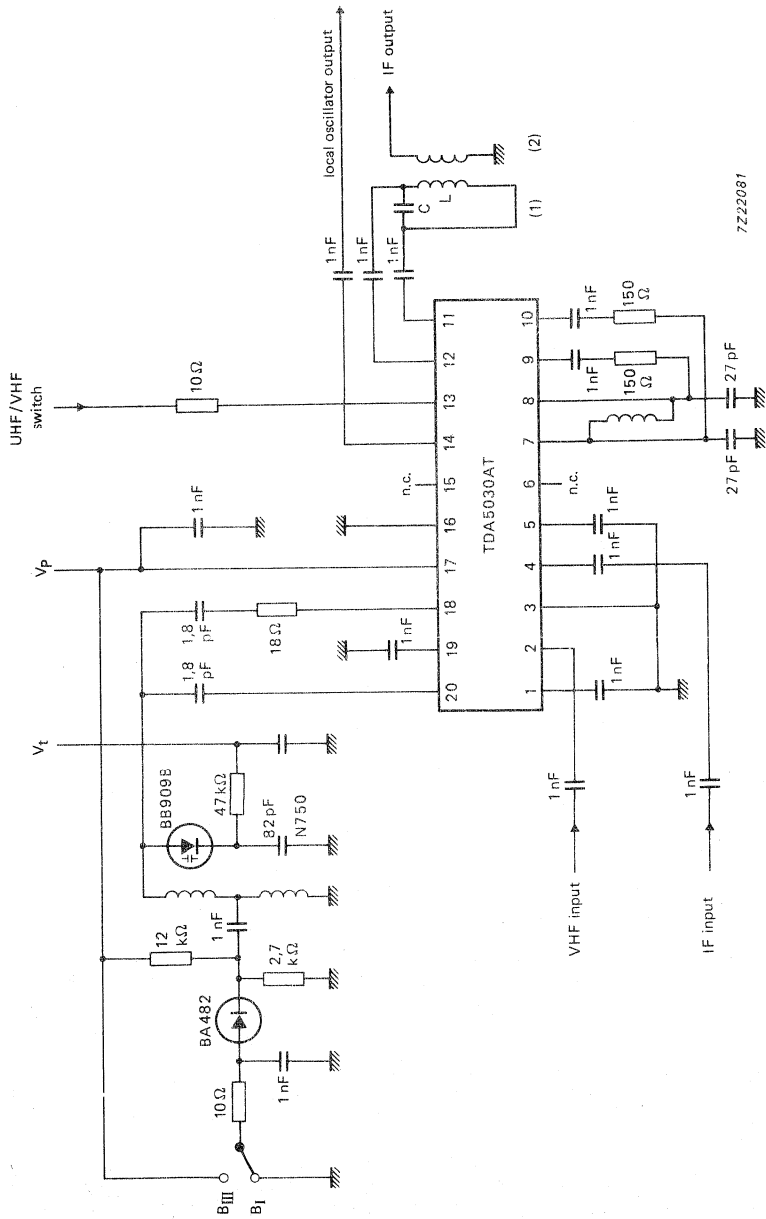

(1) C = 18 pF, L = 2.2 μH, f<sub>CL</sub> = 36.5 MHz.  
 (2) Turns ratio = 7 : 1, load = 50 Ω.

Fig. 2 Test circuit.



## VHF, UHF AND HYPERBAND MIXER/ OSCILLATOR FOR TV TUNERS

### GENERAL DESCRIPTION

The TDA5230T is a monolithic integrated circuit that performs the VHF, UHF and Hyperband (300 to 470 MHz) mixer/oscillator functions in TV tuners. This device gives the designer the capability to design an economical and physically small all-band TV tuner which will be capable of meeting the most stringent requirements e.g. F.T.Z. or F.C.C. The TV tuner development time can be dramatically reduced by using this device.

### Features

- Balanced mixer with a common emitter input for VHF
- Amplitude-controlled oscillator for VHF
- Balanced mixer with common base input for Hyperband
- Balanced oscillator for Hyperband
- Balanced mixer with common base input for UHF
- Balanced oscillator for UHF
- SAW filter preamplifier with an output impedance of 75  $\Omega$
- Buffer stage to drive a prescaler with the oscillator signal (VHF only)
- Bandgap voltage stabilizer for oscillator stability
- UHF switching circuit

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage		$V_{17-10,20}$	—	12	—	V
VHF frequency range		$f_{VHF}$	50	—	300	MHz
HYPERBAND frequency range		$f_{HYP}$	300	—	470	MHz
UHF frequency range		$f_{UHF}$	470	—	900	MHz
Conversion noise		F	7	—	12	dB
VHF input voltage	1% cross-modulation	$V_{23-20}$	—	100	—	dBmV
HYPERBAND and UHF input power	1% cross-modulation	$P_i$	—	-19	—	dBm
VHF voltage gain		$\Delta V$	—	24,5	—	dB
HYPERBAND and UHF voltage gain		$\Delta V$	—	37	—	dB

### PACKAGE OUTLINE

24-lead mini-pack, plastic (SO-24; SOT-137A).

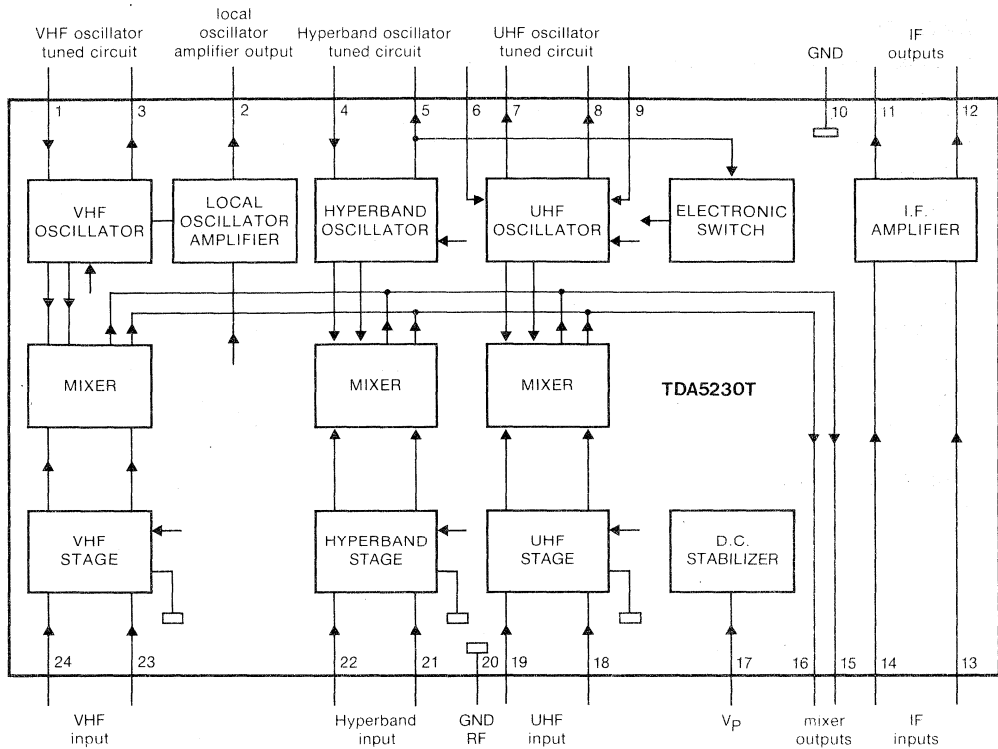


Fig. 1 Block diagram.

7Z81397

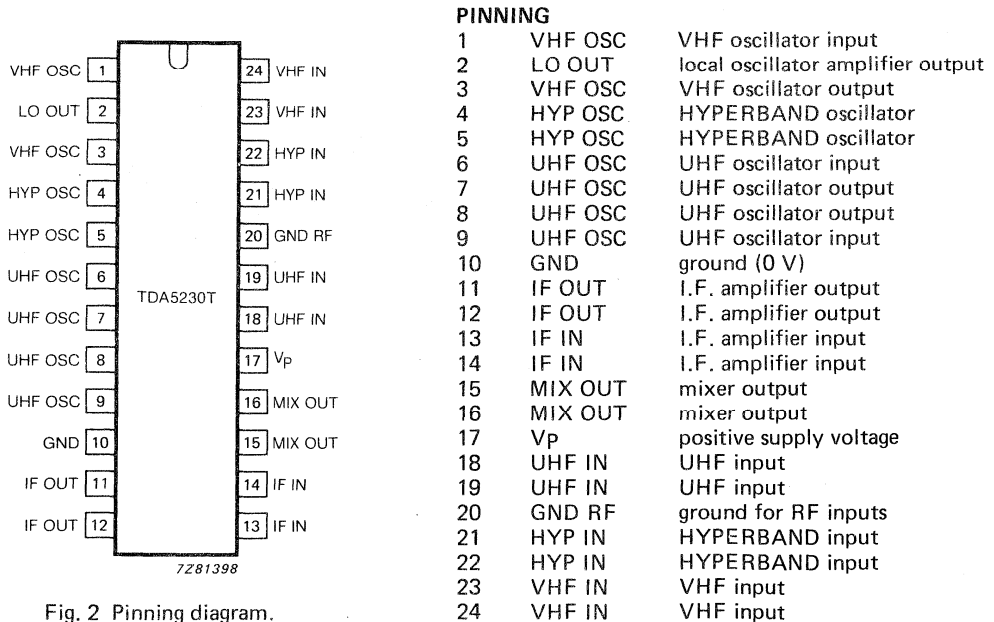


Fig. 2 Pinning diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage	pin 17	$V_p$	—	14	V
Switching voltage	pin 5	$V_5$	0	8	V
Output current of each pin to ground	pins 11 and 12	$I_{11, 12}$	-10	+ 10	mA
Maximum short circuit time outputs		$t_{ss}$	—	10	s
Storage temperature range		$T_{stg}$	-55	+ 150	°C
Operating ambient temperature range		$T_{amb}$	-25	+ 80	°C

**THERMAL RESISTANCE**

From junction to ambient in free air

 $R_{th\ j-a}$  typ. 75 K/W

DEVELOPMENT DATA

## CHARACTERISTICS

$V_p = 12\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ; unless otherwise specified; measured in Fig. 4.

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage		$V_{17-10, 20}$	10	—	13,2	V
Supply current		$I_{17}$	—	42	55	mA
VHF switching voltage		$V_5$	0	—	1,5	V
HYPERBAND switching voltage		$V_5$	2	—	3,5	V
UHF switching voltage		$V_5$	4	—	5	V
UHF switching current		$I_5$	—	—	0,2	mA
<b>VHF mixer (including I.F. amplifier)</b>	measured using circuit shown in Fig. 4					
Frequency range		$f_{VHF}$	50	—	300	MHz
Noise figure	50 MHz	F	—	7,5	9	dB
	225 MHz	F	—	9	10	dB
	300 MHz	F	—	10	12	dB
Optimum source admittance	50 MHz	$G_{23-20}$	—	0,5	—	mS
	225 MHz	$G_{23-20}$	—	1,1	—	mS
	300 MHz	$G_{23-20}$	—	1,2	—	mS
Input conductance	50 MHz	$G_{23-20}$	—	0,23	—	mS
	225 MHz	$G_{23-20}$	—	0,5	—	mS
	300 MHz	$G_{23-20}$	—	0,67	—	mS
Input capacitance	50 - 300 MHz	$C_{23-20}$	—	2	—	pF
Input voltage	1% cross-modulation in channel	$V_{23-20}$	97	100	—	$\text{dB}\mu\text{V}$
Input voltage	10 kHz pulling in channel	$V_{23-20}$	100	108	—	$\text{dB}\mu\text{V}$
Voltage gain	20 log $(V_{11-12}/V_{23})$ pins 11, 12 and 23	$\Delta V$	22	24,5	27	dB
Conversion transadmittance mixer	$S_c = I_{15}/V_{23}$ $= -I_{16}/V_{23}$	$S_{c23-15, 16}$	—	3,1	—	mS

## CHARACTERISTICS

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Mixer output admittance	pins 15 and 16		—	30	—	$\mu$ s
Mixer output capacitance		$I_{15-16}$	—	2,7	—	pF
<b>VHF oscillator</b>						
Frequency range		$f_{VHF}$	70	—	330	MHz
Frequency shift	$\Delta V_b = 10\%$ ; 70 - 330 MHz	$\Delta f$	—	—	200	kHz
Frequency drift	$\Delta T = 15$ deg; 70 - 330 MHz	$\Delta f$	—	—	250	kHz
Frequency drift	5 s to 15 min after switching on	$\Delta f$	—	—	200	kHz
<b>HYPERBAND mixer including IF</b>	measured using circuit shown in Fig. 4; measurements using hybrid; note 2					
Frequency range		$f_{HYP}$	300	—	470	MHz
Noise figure	pins 21 and 22; 300 MHz 470 MHz	F	—	8	10	dB
		F	—	8	10	dB
Input reflection coefficient	note 5; pins 21 and 22; 300 MHz phase 470 MHz phase	$S_{11}$	—	0,60 + 162 0,58 + 151	—	deg deg
Available input power	1% cross-modulation in channel; pins 21 and 22; 300 MHz 470 MHz	$P_{AI}$	—	—19 —19	—	dBm dBm
10 kHz pulling in channel	pins 21 and 22; 470 MHz		—	—11	—	dBm

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
N+5 — 1 MHz pulling	note 3 ; 470 MHz		—	-29	—	dBm
Voltage gain	note 4 ; 300 MHz 470 MHz	$\Delta V$	34	37	40	dB
		$\Delta V$	34	37	40	dB
<b>HYPERBAND oscillator</b>						
Frequency range		$f_{HYP}$	330	—	520	MHz
Frequency shift	$\Delta V_b = 5\%$	$\Delta f$	—	—	400	kHz
Frequency drift	$\Delta T = 15$ deg	$\Delta f$	—	—	500	kHz
Frequency drift	5 s to 15 min after switching on	$\Delta f$	—	—	600	kHz
Input reflection coefficient	pins 4 and 5; $f = 300$ MHz phase	$S_{11}$	— —	1,1 -10	— —	deg
<b>UHF mixer including IF</b>						
	measured using circuit shown in Fig. 4; measurements using hybrid; note 2					
Frequency range		$f_{UHF}$	470	—	860	MHz
Noise figure	pins 18 and 19; 470 MHz 860 MHz	F	—	8	10	dB
		F	—	9	11	dB
Input reflection coefficient	pins 18 and 19; 470 MHz phase 860 MHz phase	$S_{11}$	— — — —	0,63 + 157 0,62 + 138	— — — —	deg deg
Available input power	1% cross- modulation in channel; pins 18 and 19; 470 MHz 860 MHz	$P_{AI}$	— —	-19 -19	— —	dBm dBm

## CHARACTERISTICS

parameter	conditions	symbol	min.	typ.		max.	unit
10 kHz pulling in channel	pins 21 and 22; 860 MHz		—	—10		—	dBm
N+5 — 1 MHz pulling	note 3; 820 MHz		—42	—35		—	dBm
Voltage gain	note 4; 470 MHz 860 MHz	$\Delta V$	34	37		40	dB
		$\Delta V$	34	37		40	dB
<b>UHF oscillator</b>							
Frequency range		$f_{\text{UHF}}$	500	—		900	MHz
Frequency shift	$\Delta V_b = 5\%$	$\Delta f$	—	—		500	kHz
Frequency drift	$\Delta T = 25\text{ }^\circ\text{C}$ to $40\text{ }^\circ\text{C}$	$\Delta f$	—	—		500	kHz
Frequency drift	5 s to 15 min after switching on	$\Delta f$	—	—		300	kHz
<b>IF amplifier</b>							
	differentially measured at 36 MHz			mod.	phase		
Input reflection coefficient		$S_{11}$	—	—0,94	—1	—	deg
Reverse transmission coefficient		$S_{12}$	—	—0,009	—5,2	—	deg
Forward transmission coefficient		$S_{21}$	—	4,0	160	—	deg
Output reflection coefficient		$S_{22}$	—	0,40	13,7	—	deg

DEVELOPMENT DATA

CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.		max.	unit
<b>LO output</b>							
Output voltage into 75 Ω resistor	f = 330 MHz	V <sub>2-20</sub>	14	37		100	mV
Spurious signal on LO output with respect to LO output signal	measured at 75 Ω; RF (pin 24) level = 1 V ≤ 225 MHz; and > 0,3 V 225 to 300 MHz		—	—		—10	dB
LO signal harmonics with respect to LO signal	measured at 75 Ω	SHD	—	—		—10	dB
Output reflection coefficient	VHF; f = 330 MHz HYPERBAND and UHF; f = 500 MHz	S <sub>22</sub>	—	mod.	phase	—	deg
				0,44	1		
			—	0,87	—25	—	deg

Notes to the characteristics

1. Measured with an input circuit for optimum noise. (See Fig. 3)




Fig. 3 Input circuit for optimum noise.



Notes to the characteristics (see Fig. 4)

Table 1 Component values

component	f = 50 MHz	f = 225 MHz	f = 300 MHz	unit
L1	680	80	60	nH
C1	10	2,2	1,2	pF
C2	4,7	6,8	1	pF
C3	3,3	1,8	2,7	pF

Table 2 Electrical parameters of the circuit (for appropriate impedance and selectivity)

parameter	f = 50 MHz	f = 225 MHz	f = 300 MHz	unit
Insertion loss	1,0	1,0	0,7	dB
VSWR with IC	4,0	4,0	5,8	
Image suppression	—	> 15	—	dB
Output impedance (source for IC)	0,6	1,2	1,6	mS

DEVELOPMENT DATA

- The values have been corrected for hybrid and cable losses. The symmetrical output impedance of the circuit is  $100 \Omega$ .
- The input level of a  $N+5 - 1$  MHz signal which is just visible.
- The gain is defined as the transducer gain (measured in Fig. 4) and the voltage ratio of L6 to L7 (6:1, 16 dB).
- All S parameters are referred to a  $50 \Omega$  system.

APPLICATION INFORMATION

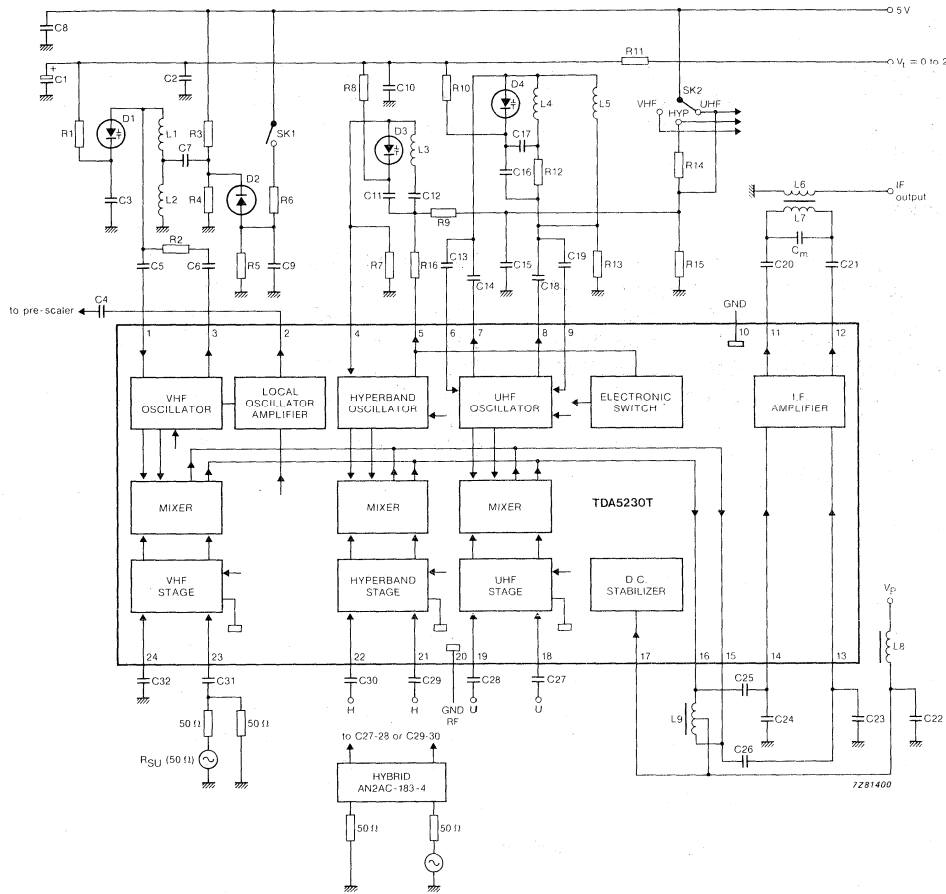


Fig. 4 Application diagram.

## APPLICATION INFORMATION

## Component values of the application diagram

## resistors

R1 = 47 k $\Omega$	R2 = 18 $\Omega$	R3 = 4,7 k $\Omega$	R4 = 1,2 k $\Omega$	R5 = 47 k $\Omega$
R6 = 100 $\Omega$	R7 = 22 k $\Omega$	R8 = 22 k $\Omega$	R9 = 2,2 k $\Omega$	R10 = 22 k $\Omega$
R11 = 1 k $\Omega$	R12 = 2,2 k $\Omega$	R13 = 22 k $\Omega$	R14 = 2,2 k $\Omega$	R15 = 2,2 k $\Omega$
R16 = 10 $\Omega$ (SMD)				

## capacitors

C1 = 1 $\mu$ F - 40 V	C2 = 1 nF	C3 = 82 pF (N750)	C4 = 1 nF
C5 = 1,8 pF (N750)	C6 = 1,8 pF (N750)	C7 = 1 nF	C8 = 1 nF
C9 = 1 nF	C10 = 1 nF	C11 = 12 pF (N750)	C12 = 1 nF
C13 = 1,5 pF (SMD)	C14 = 1,5 pF (SMD)	C15 = 1 nF	C16 = 5,6 pF (SMD)
C17 = 100 pF (SMD)	C18 = 1,5 pF (SMD)	C19 = 1,5 pF (SMD)	C20 = 1 nF
C21 = 1 nF	C22 = 1 nF	C23 = 15 pF (N750)	C24 = 15 pF (N750)
C25 = 1 nF	C26 = 1 nF	C27 = 1 nF	C28 = 1 nF
C29 = 1 nF	C30 = 1 nF	C31 = 1 nF	C32 = 1 nF
Cm = 18 pF (N750)			

## diodes and IC

D1 = BB909B	D2 = BA482	D3 = BB909B	D4 = BB405B
IC = TDA5230T			

## coils

L1 = 2,5 t ( $\phi$ 3)	L2 = 6,5 t ( $\phi$ 4)	L3 = 2,5 t ( $\phi$ 2,5)
L4 = 1,5 t ( $\phi$ 2,5)	L5 = 1,5 t ( $\phi$ 3)	L6 = 2 t TOKO: 7 kN, Mat: 113 kN
L7 = 10 t	L8 = 5 $\mu$ H	L9 = 2 x 6 t TOKO: 7 kN, Mat: 113 kN

wire size for L1 to L5 = 0,4 and for L6, L7 and L9 = 0,1.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA5702

## 8-BIT DAC

The TDA5702 is an 8-bit digital-to-analogue converter (DAC) designed for video and professional applications. The TDA5702 converts the 8-bit binary coded digital words into an analogue output signal at a sampling rate of 25 MHz. The design of the TDA5702 has eliminated the need for an operational amplifier, buffer and deglitching circuit at the analogue output.

### Features

- 8-bit accuracy
- Internal input register
- TTL compatible digital signals
- Two voltage supply connections:
  - analogue (+ 5 V)
  - digital (+ 5 V)
- Two complementary outputs ( $V_{OUT}$ ,  $\overline{V_{OUT}}$ )
- No deglitching circuit required
- Low power consumption; typically 300 mW
- 16-lead DIL; plastic package

### Applications

- Video data conversion
- Colour/black-and-white graphics
- CRT displays
- Waveform/test signal generation

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage	pins 13 and 16	$V_p$	—	5	—	V
Supply current	pins 13 and 16	$I_p$	—	61	—	mA
Maximum conversion rate		$F_c$	25	—	—	MHz
Absolute linearity			-0,5	—	+0,5	LSB
Differential linearity			-0,5	—	+0,5	LSB
Dynamic range output	$Z_L > 10 \text{ k}\Omega$	$V_{14-16}$	—	1,6	—	V
	$Z_L = 75 \text{ }\Omega$	$V_{14-16}$	—	0,8	—	V
Complementary output	$Z_L > 10 \text{ k}\Omega$	$V_{15-16}$	—	1,6	—	V
	$Z_L = 75 \text{ }\Omega$	$V_{15-16}$	—	0,8	—	V
Output impedance		$ Z_{14-16} $	—	75	—	$\Omega$
Complementary output impedance		$ Z_{15-16} $	—	75	—	$\Omega$

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

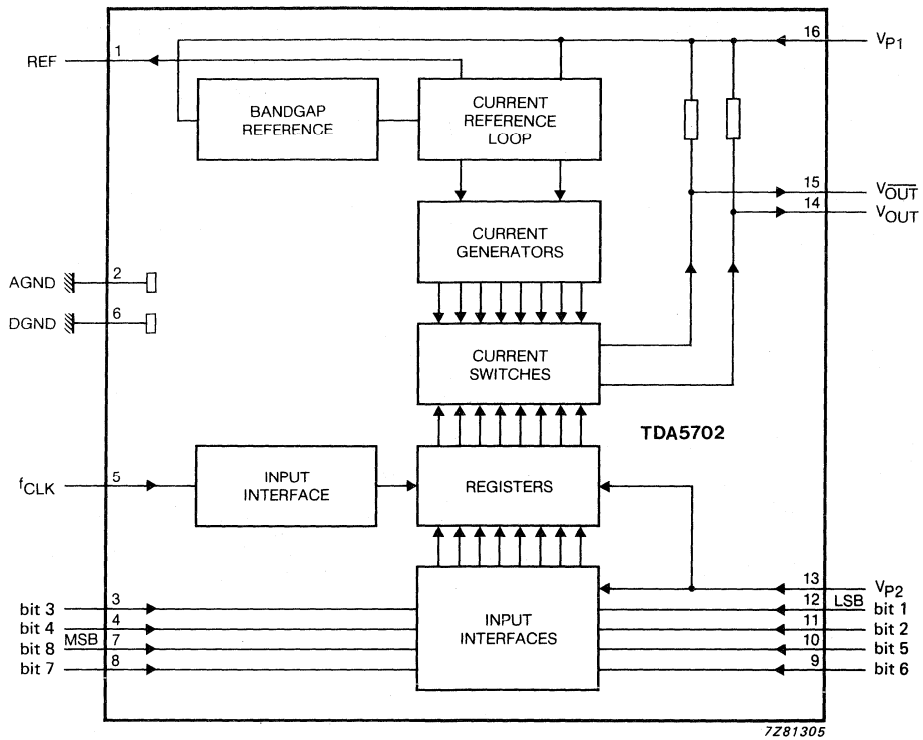


Fig. 1 Block diagram.

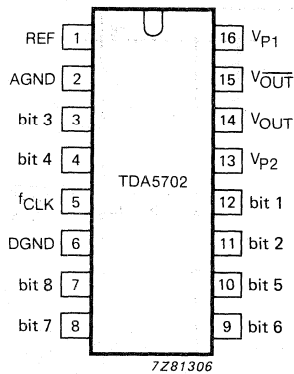


Fig. 2 Pinning diagram.

## PINNING

Pin	Symbol	Description
1	REF	current reference loop decoupling
2	AGND	analogue ground
3	bit 3	
4	bit 4	
5	f <sub>CLK</sub>	25 MHz clock input
6	DGND	digital ground
7	bit 8	most significant bit (MSB)
8	bit 7	
9	bit 6	
10	bit 5	
11	bit 2	
12	bit 1	least significant bit (LSB)
13	V <sub>P2</sub>	digital supply voltage
14	V <sub>OUT</sub>	analogue voltage output
15	V <sub>OUT</sub> <sup>-</sup>	complementing analogue voltage output
16	V <sub>P1</sub>	analogue supply voltage

DEVELOPMENT DATA

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltages	digital; pin 13	V <sub>P2</sub>	—	8	V
	analogue; pin 16	V <sub>P1</sub>	—	8	V
Input voltage	pins 3, 4, 5, 7, 8, 9, 10, 11 and 12	V <sub>I</sub>	—	8	V
Storage temperature range		T <sub>stg</sub>	-55	+150	°C
Junction temperature		T <sub>j</sub>	—	+125	°C
Operating temperature range		T <sub>amb</sub>	0	+70	°C

## CHARACTERISTICS

 $V_{P1} = V_{P2} = 4,75 \text{ to } 5,25 \text{ V}$ ;  $T_{\text{amb}} = 0 \text{ to } +70 \text{ }^{\circ}\text{C}$ ; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage	digital; pin 13	$V_{P2}$	4,75	5,0	5,25	V
Supply voltage	analogue; pin 16	$V_{P1}$	4,75	5,0	5,25	V
Supply current	digital; pin 13	$I_{P2}$	25	34	43	mA
Supply current	analogue; pin 16	$I_{P1}$	20	27	34	mA
Resolution		Res	—	8	—	bits
<b>Inputs</b>						
Fig. 5						
Digital input levels						
Input voltage HIGH		$V_{IH}$	2,2	—	—	V
Input voltage LOW		$V_{IL}$	—	—	0,8	V
Input current HIGH		$I_{IH}$	—	—	10	$\mu\text{A}$
Input current LOW		$I_{IL}$	-1,5	—	—	mA
Clock input current LOW		$I_{iL}$	-1,0	—	—	mA
<b>Outputs</b>						
Fig. 4						
Full scale voltage	with respect to $V_p$	$V_{FS}$	1,43	1,6	1,75	V
Zero offset voltage	with respect to $V_p$	$V_{ZS}$	—	10	25	mV
Absolute linearity			-0,5	—	+0,5	LSB
Differential linearity			-0,5	—	+0,5	LSB
Dynamic range output	$Z_L > 10 \text{ k}\Omega$	$V_{14-16}$	—	1,6	—	V
	$Z_L = 75 \text{ }\Omega$	$V_{14-16}$	—	0,8	—	V
Complementary output	$Z_L > 10 \text{ k}\Omega$	$V_{15-16}$	—	1,6	—	V
	$Z_L = 75 \text{ }\Omega$	$V_{15-16}$	—	0,8	—	V
Output impedance		$ Z_{14-16} $	—	75	—	$\Omega$
Complementary output impedance		$ Z_{15-16} $	—	75	—	$\Omega$
External capacitance		$C_1$	—	100	—	nF



parameter	conditions	symbol	min.	typ.	max.	unit
<b>Timing</b>						
Maximum conversion rate		$F_c$	25	—	—	MHz
Data turn-on delay	Fig. 3	$t_{DS}$	—	10	—	ns
Transient settling time	½ LSB	$t_{SET1}$	—	30	—	ns
Transient settling time	1 LSB	$t_{SET2}$	—	20	—	ns
Transient output (glitch) energy		$t_O$	—	—	+ 50	LSB.n
Pulse width	Fig. 3	$t_{PW}$	10	—	—	ns
Data set-up time		$t_{su}$	4	—	—	ns
Data hold time		$t_h$	6	—	—	ns

DEVELOPMENT DATA

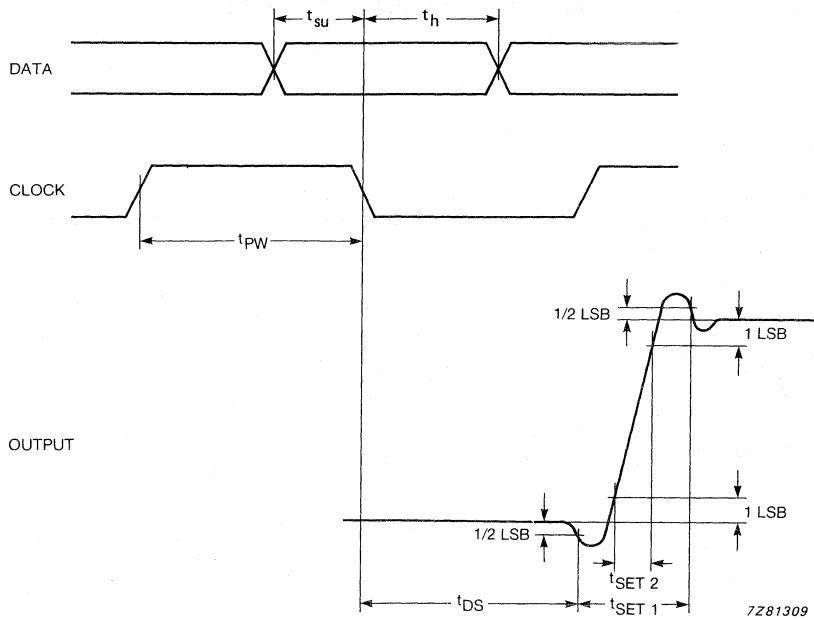


Fig. 3 Timing diagram.




Fig. 4 Equivalent analogue output circuit.




Fig. 5 Equivalent digital input circuit.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA5703

TO BE REPLACED BY TDA8703 - SEE RELEVANT DATA SHEET

## 8-BIT ADC

The TDA5703 is an 8-bit analogue-to-digital converter (ADC) designed for video and professional applications. The TDA5703 converts the analogue input signal into 8-bit binary coded digital words at a sampling rate of up to 25 MHz.

### Features

- 8-bit binary coded resolution
- Digitizing rates up to 25 MHz
- Internal reference
- Only 3 external capacitors required
- Two voltage supply connections:
  - analogue (+ 5 V)
  - digital (+ 5 V)
- 1 V full scale analogue input (75  $\Omega$  external resistor tied to  $V_{P1}$ )
- Full scale bandwidth; 11 MHz at 3 dB
- Low power consumption; typically 800 mW
- 24-lead DIL; plastic package

### Applications

- Video signal conversion

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage	pins 4 and 6	$V_P$	—	5	—	V
Supply current	pins 4 and 6	$I_P$	—	160	—	mA
Absolute linearity			-1,5	—	+1,5	LSB
Differential linearity			-1,0	—	+1,0	LSB
Dynamic range input	$V_1-V_3$	$V_{IN}$	—	1	—	V
Maximum conversion rate		$F_C$	25	—	—	MHz

### PACKAGE OUTLINE

24-lead DIL; plastic (SOT-101B).

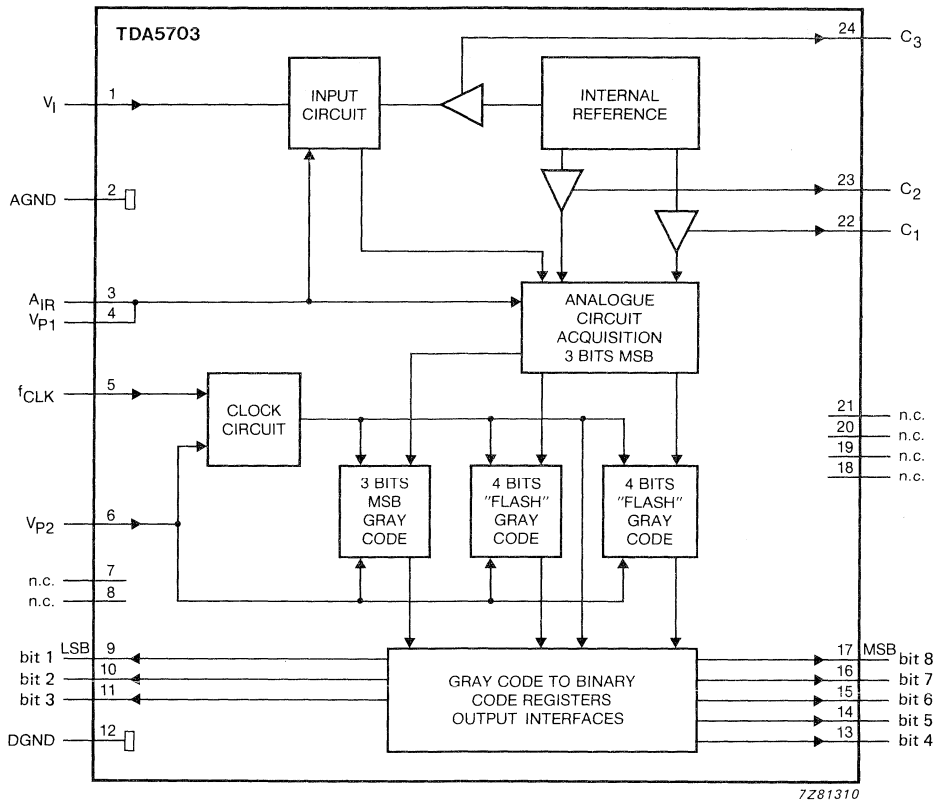


Fig. 1 Block diagram.

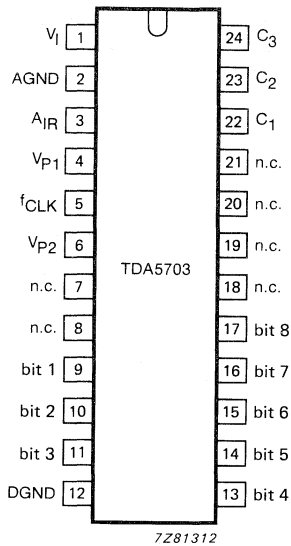


Fig. 2 Pinning diagram.

## PINNING

1	V <sub>I</sub>	analogue voltage input
2	AGND	analogue ground
3	A <sub>IR</sub>	analogue input reference
4	V <sub>P1</sub>	analogue supply voltage
5	f <sub>CLK</sub>	clock input
6	V <sub>P2</sub>	digital supply voltage
7	n.c.	not connected
8	n.c.	not connected
9	bit 1	least significant bit (LSB)
10	bit 2	
11	bit 3	
12	DGND	digital ground
13	bit 4	
14	bit 5	
15	bit 6	
16	bit 7	
17	bit 8	most significant bit (MSB)
18	n.c.	not connected
19	n.c.	not connected
20	n.c.	not connected
21	n.c.	not connected
22	C <sub>1</sub>	decoupling for internal reference
23	C <sub>2</sub>	
24	C <sub>3</sub>	

DEVELOPMENT DATA

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltages	analogue; pin 4	V <sub>P1</sub>	—	8	V
	digital; pin 6	V <sub>P2</sub>	—	8	V
Input voltage	pins 1 and 5	V <sub>I</sub>	—	8	V
Output current	pins 9, 10, 11, 13, 14, 15, 16 and 17	I <sub>O</sub>	—	10	mA
Storage temperature range		T <sub>stg</sub>	−55	+150	°C
Junction temperature		T <sub>j</sub>	—	+125	°C
Operating temperature range		T <sub>amb</sub>	0	+70	°C

## CHARACTERISTICS

 $V_{P1} = V_{P2} = 5 \text{ V}$ ;  $T_{\text{amb}} = +25 \text{ }^{\circ}\text{C}$ ; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage	analogue; pin 4	$V_{P1}$	4,75	5,0	5,25	V
Supply voltage	digital; pin 6	$V_{P2}$	4,75	5,0	5,25	V
Supply current	analogue; pin 4	$I_{P1}$	—	80	—	mA
Supply current	digital; pin 6	$I_{P2}$	—	80	—	mA
Resolution		Res	—	8	—	bits
<b>Inputs</b>						
	Fig. 3					
Digital input levels						
Input voltage HIGH		$V_{IH}$	2,2	—	—	V
Input voltage LOW		$V_{IL}$	—	—	0,8	V
Input current HIGH		$I_{IH}$	—	—	10	$\mu\text{A}$
Input current LOW		$I_{IL}$	-1	-0,35	—	mA
Analogue input range	$V_1 - V_3$	$V_{IN}$	—	1	—	V
Absolute linearity	$V_1$		-1,5	—	+1,5	LSB
Differential linearity	$V_1$		-1,0	—	+1,0	LSB
Bandwidth						
	1 dB		—	7,0	—	MHz
	3 dB		7,0	11,0	—	MHz
Differential phase	$f_c = 25 \text{ MHz}$ , when used in conjunction with TDA5702		—	1	—	deg
Differential gain	$f_c = 25 \text{ MHz}$ , when used in conjunction with TDA5702		—	3	—	%
Offset error			—	40	—	mV
Input resistance		$R_i$	—	80	—	$\text{k}\Omega$
Input capacitance		$C_i$	—	5,0	—	pF
<b>Outputs</b>						
Digital output levels						
Output voltage HIGH		$V_{OH}$	2,4	—	—	V
Output voltage LOW	$I_O = 10 \text{ mA}$	$V_{OL}$	—	—	0,4	V
External capacitance	$C_1, C_2, C_3$	$C_o$	—	100	—	nF

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Timing</b>						
Maximum conversion rate		$F_c$	25	—	—	MHz
Aperture delay	Fig. 3	$t_{\text{DELAY}}$	—	19	—	ns
Digital output delay	Fig. 3	$t_D$	—	28	—	ns
Pulse width conversion HIGH	Fig. 3	$t_{\text{PWH}}$	20	—	—	ns
Pulse width conversion LOW	Fig. 3	$t_{\text{PWL}}$	20	—	—	ns
<b>Temperature</b>						
Operating ambient temperature range		$T_{\text{amb}}$	0	—	+ 70	°C

DEVELOPMENT DATA

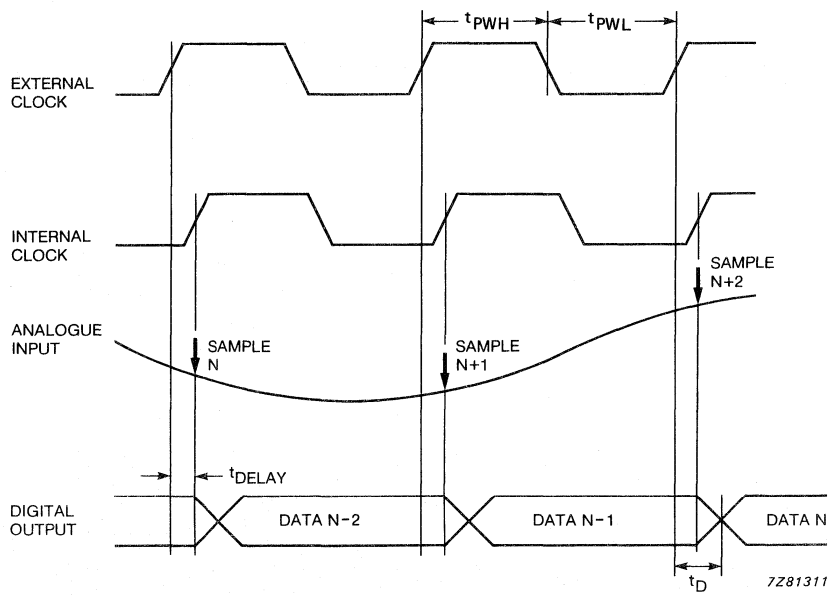


Fig. 3 Timing diagram.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA8340;Q  
TDA8341;Q

## TELEVISION IF AMPLIFIER AND DEMODULATOR

The TDA8340;Q and TDA8341;Q are integrated IF amplifier and demodulator circuits for colour or black/white television receivers, the TDA8340;Q is for application with n-p-n tuners and the TDA8341;Q for p-n-p tuners.

The TDA8340;Q and TDA8341;Q are pin-compatible successors with improved performance to types TDA2540/2541;Q and TDA3540/3541;Q.

### Features

- Full range gain-controlled wide-band IF amplifier
- Linear synchronous demodulator with excellent intermodulation performance
- White spot inverter
- Wide-band video amplifier with noise protection
- AFC circuit with AFC on/off switching and sample-and-hold function
- Low impedance AFC output
- AGC circuit with noise gating
- Tuner AGC output for n-p-n tuners (TDA8340) or p-n-p tuners (TDA8341)
- External video switch for switching-off the video output
- Reduced sensitivity for high sound carriers
- Integrated filter to limit second harmonic IF signals
- Wide supply voltage range
- Requires few external components

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage (pin 11)		$V_{CC} = V_{11-13}$	9,4	12	13,2	V
Supply current (pin 11)		$I_{11}$	30	42	55	mA
IF input sensitivity (r.m.s. value)		$V_{1-16}(\text{rms})$	20	40	80	$\mu\text{V}$
IF gain control range		$G_V$	—	67	—	dB
Video output voltage (peak-to-peak value)	white signal; 10% top sync	$V_{12-13}(\text{p-p})$	2,4	2,7	3,0	V
Signal-to-noise ratio	$V_i = 10 \text{ mV}$	$S/(S+N)$	50	58	—	dB
AFC output voltage swing (peak-to-peak value)		$V_{5-13}(\text{p-p})$	—	10	—	V

### PACKAGE OUTLINES

TDA8340; TDA8341: 16-lead DIL; plastic (SOT-38).

TDA8340Q; TDA8341Q: 16-lead QIL; plastic (SOT-58).

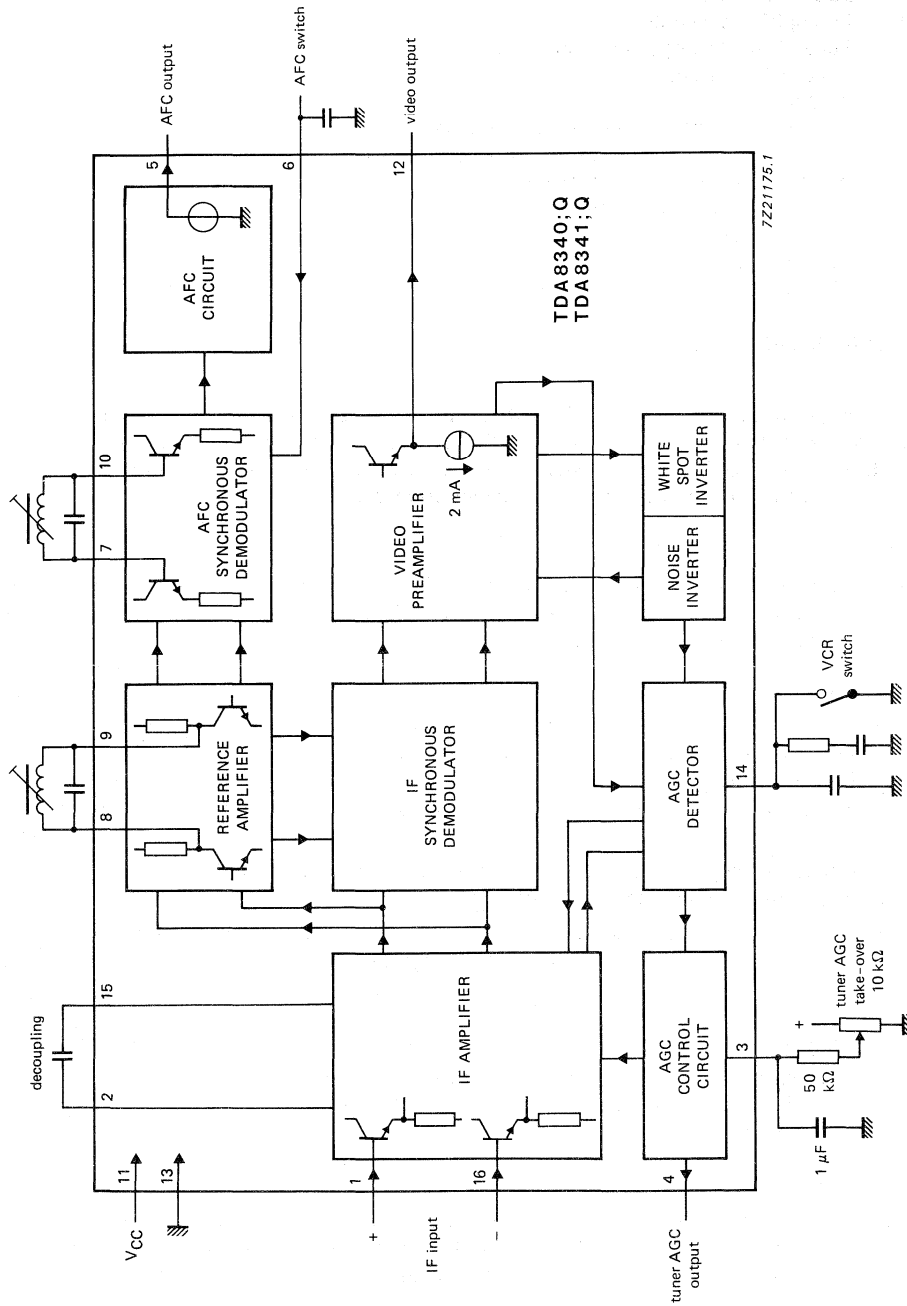


Fig. 1 Block diagram.

**PINNING**

1 and 16	Balanced IF inputs
2 and 15	IF amplifier decoupling
3	Tuner AGC starting point adjustment
4	Tuner AGC output
5	AFC output
6	AFC on/off switch and sample-and-hold capacitor
7 and 10	Reference carrier $\pi/2$ rad. phase shift
8 and 9	IF picture carrier passive regeneration
11	Positive supply voltage ( $V_{CC}$ )
12	Video output
13	Ground ( $V_{EE}$ )
14	IF AGC capacitor and VCR switch

**FUNCTIONAL DESCRIPTION****IF amplifier**

This is a 3-stage, gain-controlled IF amplifier with a wide dynamic range. On-chip capacitors in the d.c. feedback loop of the amplifier maintain stability at maximum gain. Internal stabilization of the supply voltage ensures the desired sensitivity and gain control range over the whole supply voltage range and also gives very good power supply ripple rejection in this part of the circuit.

**Demodulator**

The redesigned IF demodulator is a quasi-synchronous circuit that employs passive carrier regeneration and logarithmic clamping to give improved signal handling. The demodulator input is a.c. coupled to the IF amplifier to reduce d.c. offsets and thus minimize residual IF carrier in the output signal.

**Video amplifier**

The linearity and bandwidth of the video amplifier are sufficient to meet all wide band requirements, e.g. for teletext transmissions. Second harmonics of the IF carrier are effectively reduced by a Sallen-Key low pass interstage filter between the demodulator output and the video amplifier input. An integrated filter in the noise inverter reduces the sensitivity of the video amplifier for high sound carriers.

White spot protection comprises a white spot clamp system combined with a delayed-action inverter which is also highly resistant to high sound carriers.

Note. To prevent radiated video output at the input pins, connect a 6,8  $\mu\text{H}$  inductor in series with pin 12 and fit as close as possible to the IC body. Use short leads.

**AGC detector**

A Bessel low-pass filter between the video output and the AGC detector improves the detector function in the presence of high sound carriers. No 'hang-up' occurs in the detector after pin 14 has been short-circuited to ground (VCR switch operated). The detector also generates the sample-and-hold pulse for the AFC system.

**AGC control circuit**

This converts the AGC detector voltage (pin 14) into a current signal which controls the gain of the IF amplifier. It also provides a tuner AGC control output from pin 4, current limiting is incorporated to prevent internal damage. The AGC starting point is adjusted via pin 3.

**FUNCTIONAL DESCRIPTION** (continued)

**AFC circuit**

The AFC circuit provides a voltage output which controls the IF frequency of the tuner. Video information on the AFC output (pin 5) is eliminated by a sample-and-hold circuit (external capacitor at pin 6). Coupling between the AFC and reference tuned circuits is via two small capacitors (or parasitic capacitance) between the respective tracks of the printed circuit board. If the capacitance is less than 1 pF, the steepness of the AFC characteristic is reduced.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage (pin 11)	$V_{CC} = V_{11-13}$	9,4	13,2	V
IF AGC voltage/VCR switch	$V_{14-13}$	—	13,2	V
Tuner AGC voltage	$V_{4-13}$	—	12	V
AFC switch voltage	$V_{6-13}$	—	13,2	V
Maximum voltage level with VCR switch active	$V_{12-13}$	—	5,0	V
DC current at video output	$I_{12}$	—	10	mA
DC current at AFC output	$I_5$	—	10	mA
Total power dissipation	$P_{tot}$	—	1,2	W
Storage temperature range	$T_{stg}$	-65	+150	°C
Operating ambient temperature	$T_{amb}$	-25	+70	°C

## CHARACTERISTICS

Measured in circuit of Fig. 3;  $V_{CC} = 12\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; unless otherwise specified

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage (pin 11)		$V_{CC} = V_{11-13}$	9,4	12	13,2	V
Supply current	no input signal	$I_{11}$	30	42	55	mA
<b>IF amplifier (note 1)</b>						
Input sensitivity	at onset of AGC	$V_{1-16}$	20	40	80	$\mu\text{V}$
Differential input resistance		$R_{1-16}$	—	2	—	$\text{k}\Omega$
Differential input capacitance		$C_{1-16}$	—	3	—	pF
Gain control range		$G_v$	—	67	—	dB
Input signal variation	note 2	$V_{12-13}$	—	—	0,5	dB
Maximum input signal		$V_{1-16}$	100	—	—	mV
<b>Tuner AGC (note 1)</b>						
Tuner AGC starting point (note 3)	$R_{3-11} = 39\text{ k}\Omega$ $R_{3-13} = 39\text{ k}\Omega$	$V_{1-16}$ $V_{1-16}$	— 70	— —	3 —	mV mV
Maximum current swing of tuner AGC output		$I_4$	10	—	—	mA
Input signal variation	note 4; $I_4 = 1\text{ to }9\text{ mA}$	$V_{1-16}$	—	—	3	dB
Output saturation voltage	$I_4 = 7\text{ mA}$	$V_{4-13}$	—	200	300	mV
Leakage current	$V_4 = 12\text{ V}$	$I_4$	—	—	1	$\mu\text{A}$
<b>Video output (note 4)</b>						
Zero-signal output level	note 5	$V_{12-13}$	5,7	6,0	6,3	V
Top sync output level		$V_{12-13}$	2,8	3,0	3,2	V
Video output voltage (peak-to-peak value)	white signal; 10% top sync	$V_{12-13(p-p)}$	2,4	2,7	3,0	V
Internal bias current of emitter follower output transistor			1,4	2,2	3,0	mA
Output impedance		$Z_{12}$	—	100	—	$\Omega$
Bandwidth of demodulated output signal		B	6	7,5	—	MHz
Differential gain	note 6	$G_d$	—	2	5	%
Differential phase	note 6	$\varphi_d$	—	2	5	deg
Luminance non-linearity	note 7		—	2	5	%
Residual carrier signal (r.m.s. value)	note 8	$V_{12-13(rms)}$	—	2	10	mV

CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Video output (continued)</b>						
Residual 2nd harmonic of carrier signal (r.m.s. value)	note 8	$V_{12-13(rms)}$	—	2	10	mV
Variation of video voltage for $\Delta V_{CC} = 1\text{ V}$		$\frac{\Delta V_{12-13(p-p)}}{\Delta V_{11-13}}$	0,1	0,2	0,3	
Intermodulation	notes 8 and 9; 1,1 MHz, blue	$\alpha$	—	-65	-60	dB
	1,1 MHz, yellow	$\alpha$	—	-60	-56	dB
	3,3 MHz	$\alpha$	—	—	-68	dB
Signal-to-noise ratio	note 10; $V_i = 10\text{ mV}$ max. gain	$S/(S+N)$ $S/(S+N)$	50 54	58 61	— —	dB dB
<b>Spot inverter (note 11)</b>						
Threshold level		$V_{12-13}$	6,3	6,8	7,3	V
Insertion level		$V_{12-13}$	4,2	4,5	4,8	V
<b>Noise inverter (note 11)</b>						
Threshold level		$V_{12-13}$	1,6	1,8	2,0	V
Insertion level		$V_{12-13}$	3,5	3,8	4,1	V
<b>VCR switch</b>						
Level below which video output switches off		$V_{14-13}$	1,8	2,2	2,6	V
Switch current	$V_{12-13} = 0,7\text{ V}$	$-I_{14}$	40	60	100	$\mu\text{A}$
<b>AFC circuit (note 12)</b>						
Output voltage swing (peak-to-peak value)		$V_{5-13(p-p)}$	—	10	—	V
Change of frequency for an AFC output voltage swing of 10 V		$\Delta f$	—	60	120	kHz
AFC output voltage	at $f = 38,9\text{ MHz}$ no input signal during AFC off	$V_{5-13}$ $V_{5-13}$ $V_{5-13}$	— 4 5	6 6 6	— 8 7	V V V
AFC output resistance		$R_{5-13}$	—	500	—	$\Omega$
AFC switch: level below which AFC output switches off		$V_{6-13}$	1,4	2,0	2,8	V
AFC switch current	during AFC on	$I_6$	—	200	500	$\mu\text{A}$
Max. AFC switch current	during AFC off; $V_{6-13} = 0\text{ V}$	$I_6$	—	—	5	mA

**Notes to the characteristics**

1. All input signals are measured r.m.s. at top sync and 38,9 MHz.
2. Measured with 0 dB = 200  $\mu$ V.
3. Tuner AGC starting point is defined as 'level of input signal when tuner AGC current = 1 mA'.
4. Measured with pin 3 connected via 39 k $\Omega$  resistor to  $V_{CC}$  (pin 11), with an r.m.s. voltage of 10 mV top sync input signal and with pin 12 not loaded.
5. At the 'projected zero point', e.g. with switched demodulator.
6. Measured in the circuit of Fig. 7:
  - the differential gain is expressed as a percentage of the difference in peak amplitudes between the largest and smallest value relative to the subcarrier amplitude at blanking level;
  - the differential phase is defined as 'the difference (in degrees) between the largest and smallest phase angles'.
7. Measured according to the test line shown in Fig. 9:
  - the non-linearity is expressed as a percentage of the maximum deviation of a luminance step from the mean step, with respect to the mean step;
  - the mean step is (white level - black level) divided by the number of steps.
8. Measured up to 45 dB gain control.
9. Test set-up and input conditions for intermodulation measurements as in Figs 6 and 7.
10. Measured with a 75  $\Omega$  source:
 
$$S/(S+N) = 20 \log \frac{V_{\text{out black to white}}}{V_{n(\text{rms})} \text{ at } B = 5 \text{ MHz}}$$
11. Video output waveform showing white spot and noise inverter threshold levels.
12. Measured with input signal  $V_{1.16} = 10$  mV and with no load at AFC output.


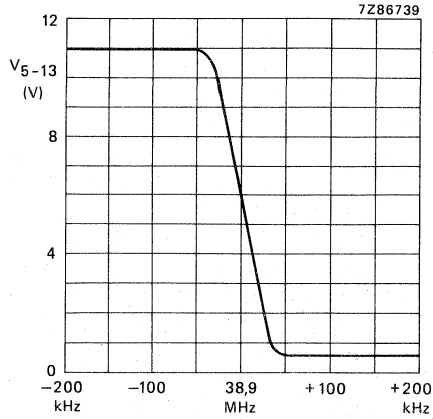


Fig. 2 AFC output voltage as a function of frequency.

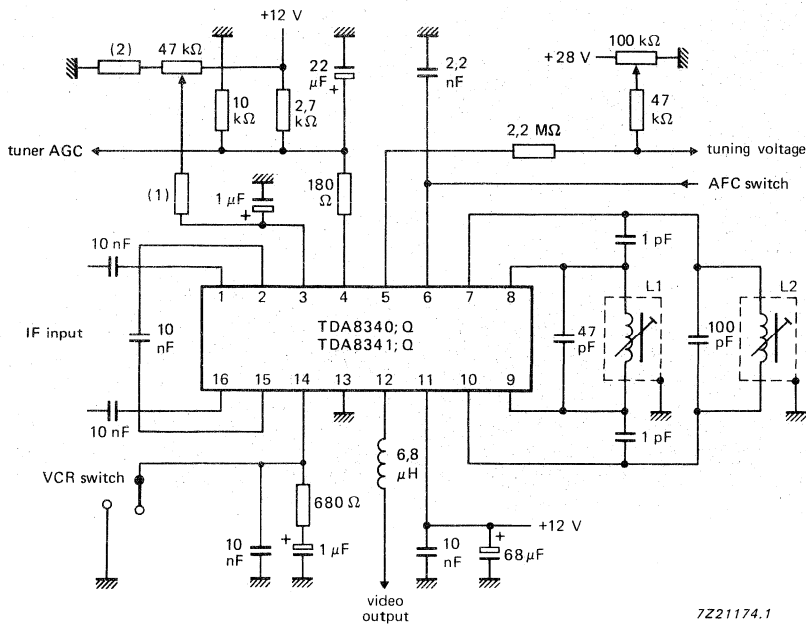

(1) Value of resistor is:

15 kΩ for TDA8340; Q  
39 kΩ for TDA8341; Q

(2) Value of resistor is:

100 kΩ for TDA8340; Q  
10 kΩ for TDA8341; Q

Fig. 3 Typical application circuit diagram;  
Q of L1 and L2 = 80;  $f_0 = 38,9$  MHz.



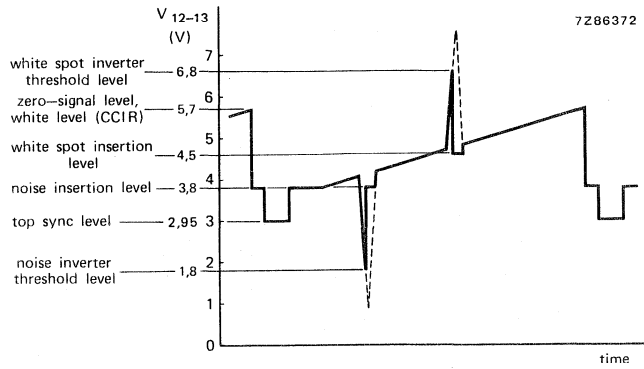


Fig. 4 Video output waveform showing white spot and noise inverter threshold levels.

DEVELOPMENT DATA


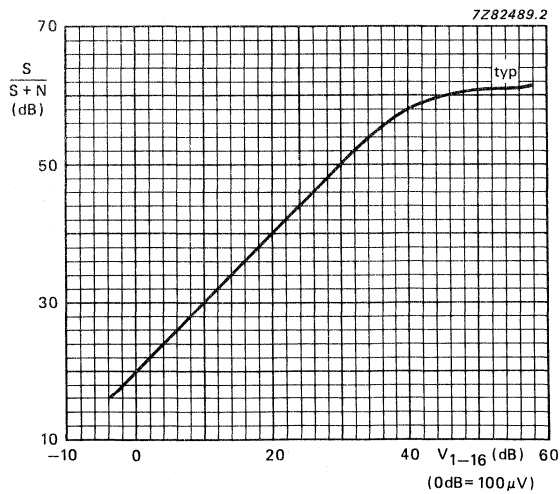


Fig. 5 Signal-to-noise ratio as a function of input voltage.

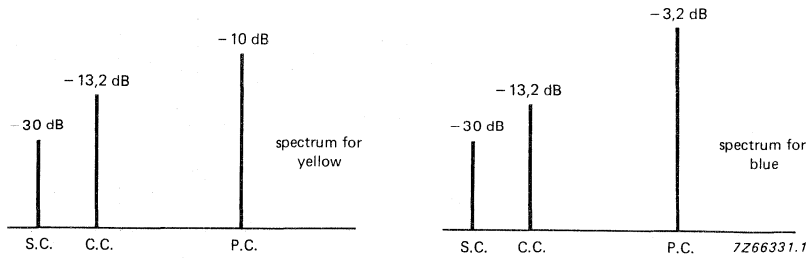

S.C.: sound carrier level  
C.C.: chrominance carrier level  
P.C.: picture carrier level

} with respect to top sync level

Fig. 6 Input conditions for intermodulation measurements;  
standard colour bar with 75% contrast.

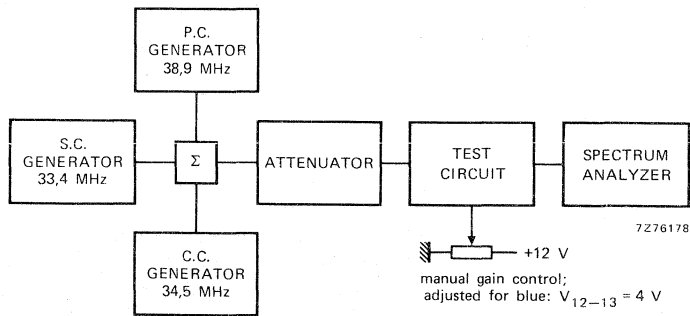


Fig. 7 Test set-up for intermodulation measurements.

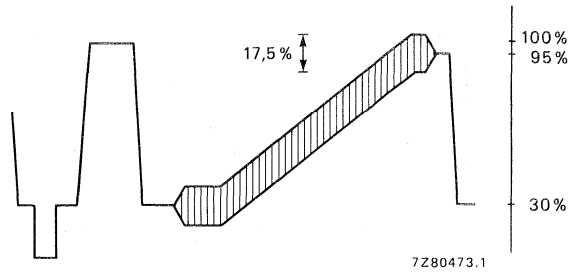


Fig. 8 Video output signal.

DEVELOPMENT DATA

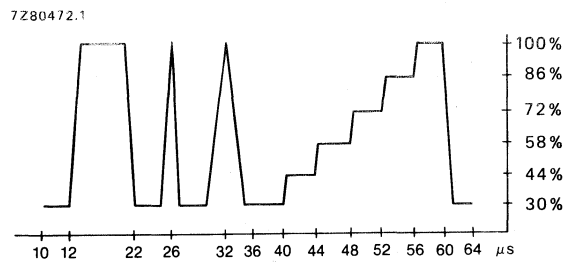


Fig. 9 E.B.U. test signal waveform (line 330).



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.



TDA8405

## TV AND VTR STEREO/DUAL SOUND PROCESSOR WITH I<sup>2</sup>C BUS CONTROL

### GENERAL DATA

The TDA8405 integrated circuit is a processor for stereo/dual-language signals for stereo-sound television receivers and VTR. The modulated signals at the TDA8405 inputs need to be "(L+R)/2" or "language A" on one channel and "R" or "language B" on the second channel (where L = left and R = right). The second channel is also modulated with the pilot carrier. The IC is controlled via the two-line, bidirectional I<sup>2</sup>C bus.

### Features

- Amplification of the two a.f. input signals by integrated operational amplifiers.
- Low distortion stereo dematrix
- All operational amplifiers are offset compensated
- I<sup>2</sup>C bus transceiver for system control (port control, mute, mode select, identification, etc.)
- Input port for fast muting
- Two general purpose output ports (three-state, bus-controlled)


### QUICK REFERENCE DATA

Supply voltage	$V_P = V_{18-9,15}$	typ. 12 V
Supply current	$I_P = I_{18}$	typ. 25 mA
A.F. input signal	$V_{i(rms)} = V_{6-9}, V_{8-9}$	typ. 1 V
Weighted signal-to-noise ratio of the a.f. output-signals (CCIR 468/2)	$(S+N)/N$	$\geq$ 70 dB
Crosstalk attenuation: stereo mode at $f = 1$ kHz	$\alpha_S$	$>$ 40 dB
dual sound mode at $f = 40$ to 12 500 Hz	$\alpha_{DS}$	$>$ 70 dB
Pilot signal input sensitivity	$V_i = V_{5-9(rms)}$	typ. 5 mV
Pilot signal amplifier gain control range	$\Delta G_V$	$>$ 40 dB

### PACKAGE OUTLINE

28-lead DIL; plastic (SOT-117).

# TDA8405

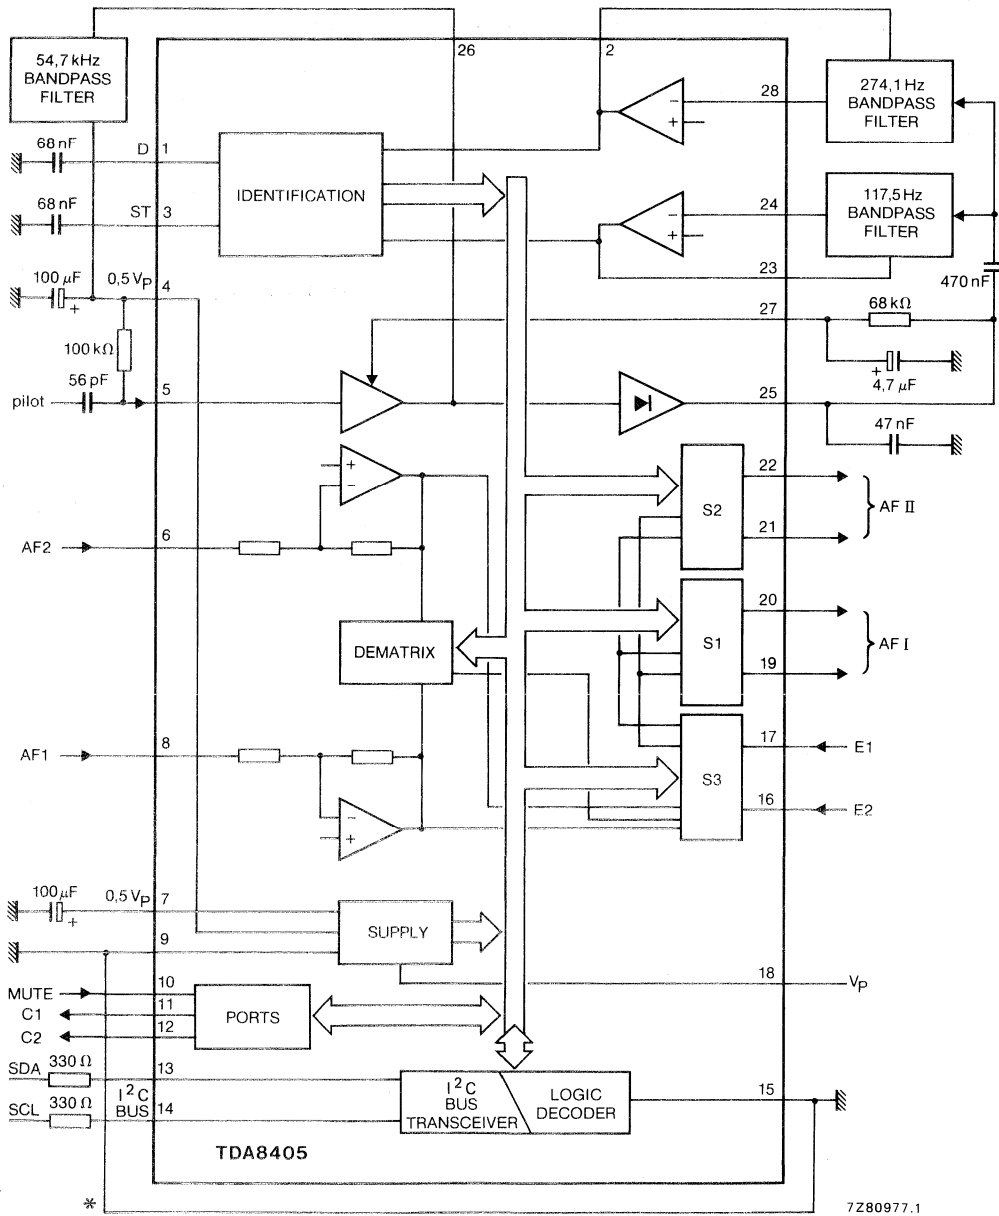

\* Direct connection between pins 9 and 15 is needed.

Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage (pin 18)*	$V_P = V_{18-9, 15}$	max.	13,2 V
Output current (pins 19, 20, 21, 22)	$I_n$	max.	5 mA
Output current (pins 2, 23)	$I_n$	max.	1 mA
Output current (pins 11, 12)	$I_n$	max.	3 mA
Voltage range at any pin	$V_n$		0 to $V_P$ V
Total power dissipation	$P_{tot}$	max.	1 W
Storage temperature range	$T_{stg}$		-40 to + 150 °C
Operating ambient temperature range	$T_{amb}$		0 to + 70 °C

DEVELOPMENT DATA

\* Supply voltage may be applied only when pins 9 and 15 are connected to ground.

**CHARACTERISTICS**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_P = 12\text{ V}$ ;  $V_{i(af)rms} = 1\text{ V}$ ;  $f = 1\text{ kHz}$ ; dematrix aligned;  $V_{ipilot(rms)} = 16\text{ mV}$ ; test circuit Fig. 2; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
Supply voltage	$V_P = V_{18-9, 15}$	10,8	12	13,2	V
Supply current at $V_P = 12\text{ V}$	$I_P = I_{18}$	—	25	—	mA
Reference voltage	$V_{ref} = V_{4-9, 15}$	—	$V_P/2$	—	V
DC levels (pins 5, 6, 7, 8, 16, 17, 19, 20, 21, 22, 24, 28)	$V_{n-9, 15}$	—	$V_P/2$	—	V
<b>BUS TRANSCEIVER (pins 13, 14)</b>					
(note 1)					
<b>Clock SCL</b>					
Voltage level LOW	$V_{14-15}$	-0,3	—	1,5	V
Voltage level HIGH	$V_{14-15}$	3,0	—	—	V
Timing LOW period	$t_{PL}$	4,7	—	—	$\mu\text{s}$
Timing HIGH period	$t_{PH}$	4,0	—	—	$\mu\text{s}$
Rise time	$t_r$	—	—	1	$\mu\text{s}$
Fall time	$t_f$	—	—	0,3	$\mu\text{s}$
Input current HIGH	$I_{IH}$	—	—	10	$\mu\text{A}$
Input current LOW	$-I_{IL}$	—	—	10	$\mu\text{A}$
<b>Data</b>					
Voltage level LOW	$V_{13-15}$	-0,3	—	1,5	V
Voltage level HIGH	$V_{13-15}$	3,0	—	—	V
Rise time	$t_r$	—	—	1,0	$\mu\text{s}$
Fall time	$t_f$	—	—	0,3	$\mu\text{s}$
Set-up time data	$t_{SU}$	0,25	—	—	$\mu\text{s}$
Input current HIGH	$I_{13}$	—	—	10	$\mu\text{A}$
Input current LOW	$-I_{13}$	—	—	10	$\mu\text{A}$
Output current LOW	$+I_{13}$	3,0	—	—	mA
<b>MUTE PORT (pin 10) note 2</b>					
Input voltage LOW	$V_{10-15}$	—	—	1,5	V
Input voltage HIGH	$V_{10-15}$	8	—	—	V



DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
<b>CONTROL PORTS</b> (pins 11, 12)					
3-state HIGH, LOW, high ohmic					
Output resistance in open state	R <sub>11, 12-15</sub>	50	—	—	kΩ
Output voltage LOW	V <sub>11, 12-15</sub>	—	—	0,8	V
Output voltage HIGH	V <sub>11, 12-15</sub>	V <sub>P-1</sub>	—	—	V
Output current LOW	I <sub>11, 12</sub>	500	—	—	μA
Output current HIGH	-I <sub>11, 12</sub>	80	—	—	μA
<b>IDENTIFICATION</b> (See Fig. 3)					
<b>Input amplifier and demodulator</b>					
Input voltage	V <sub>5-9(p-p)</sub>	—	—	2,0	V
Min. input voltage	V <sub>5-9(rms)</sub>	5,0	—	—	mV
Input resistance	R <sub>5-9</sub>	500	—	—	kΩ
Gain	G <sub>25-9</sub>	—	42	—	dB
Gain control range	ΔG	40	—	—	dB
Output voltage (gain-controlled)	V <sub>25-9(p-p)</sub>	—	1,5	—	V
<b>Operational amplifiers</b>					
Input current	I <sub>24, 28</sub>	—	70	—	nA
Gain at f = 200 Hz	G <sub>23-24, G2-28</sub>	78	—	—	dB
Output current	I <sub>2, 23</sub>	1,5	—	—	mA
Output resistance	R <sub>2, 23-9</sub>	—	2	—	kΩ
Output load capacitance	C <sub>2, 23-9</sub>	—	—	30	pF
<b>Schmitt trigger</b>					
A.C. input signal	V <sub>2, 23-9(rms)</sub>	—	1	—	V
Internal discharge resistors	R <sub>1, 3-9</sub>	—	3	—	kΩ
<b>A.F. STAGES</b>					
Input resistance (pins 6, 8, 16 and 17)	R <sub>n-9</sub>	10	—	—	kΩ
Gain (V <sub>19, 20, 21, 22-9</sub> /V <sub>6, 8-9</sub> )	G <sub>1</sub>	—	6	—	dB
Gain (V <sub>19, 20, 21, 22-9</sub> /V <sub>16, 17-9</sub> )	G <sub>2</sub>	—	0	—	dB
Input voltage	V <sub>6, 8-9(rms)</sub>	—	1	—	V
<b>Crosstalk attenuation</b> (notes 3, 4 and 9)					
dual sound	α <sub>DS</sub>	70	—	—	dB
stereo f = 250 Hz to 6,3 kHz	α <sub>S</sub>	40	—	—	dB
stereo f = 40 Hz to 250 Hz; 6,3 kHz to 12,5 kHz	α <sub>S</sub>	30	—	—	dB


## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>A.F. STAGES (continued)</b>					
Output resistance	$R_{19,20,21,22}$	—	200	300	$\Omega$
Output load capacitance (pins 19, 20, 21 and 22)	$C_{n-9}$	—	—	1,5	nF
D.C. offsets (note 8) at pins 19, 20, 21 and 22	$\Delta V$	—	—	30	mV
Total harmonic distortion (notes 4 and 5)	THD	—	0,1	0,5	%
Output signal (r.m.s. value) (pins 19, 20, 21 and 22)	$V_{n-9(rms)}$	—	—	2,0	V
Ripple rejection (note 6)	RR	30	35	—	dB
Noise rejection (note 7) (noise from I <sup>2</sup> C bus)	NR	80	—	—	dB
Signal-to-noise ratio (note 7)	(S+N)/N	70	—	—	dB
Ident signal suppression		70	—	—	dB
Signal suppression during mute (notes 4 and 7)		70	—	—	dB

**Notes to the characteristics**

1. Full specification of the I<sup>2</sup>C bus will be supplied on request.
2. Programmable mute state. If the SC3 bit in the I<sup>2</sup>C bus is LOW then the mute input is active LOW; if the mute bit is set to HIGH then the mute input is active HIGH.
3. Crosstalk attenuation definition:  $20 \log$  (unwanted output signal/input signal).
4. Frequency range:  $40 \text{ Hz} < f < 12,5 \text{ kHz}$ .
5. In dual sound mode.
6. Test circuit as in Fig. 4: ripple rejection = output modulation due to hum on the supply line.
7. Related to 2 V (r.m.s.) output signal at pin 19, 20, 21 or 22; noise weighted according to CCIR 468/2.
8. Caused by any change of the switch position.
9.  $\alpha_S$  measured without de-emphasis network.

DEVELOPMENT DATA

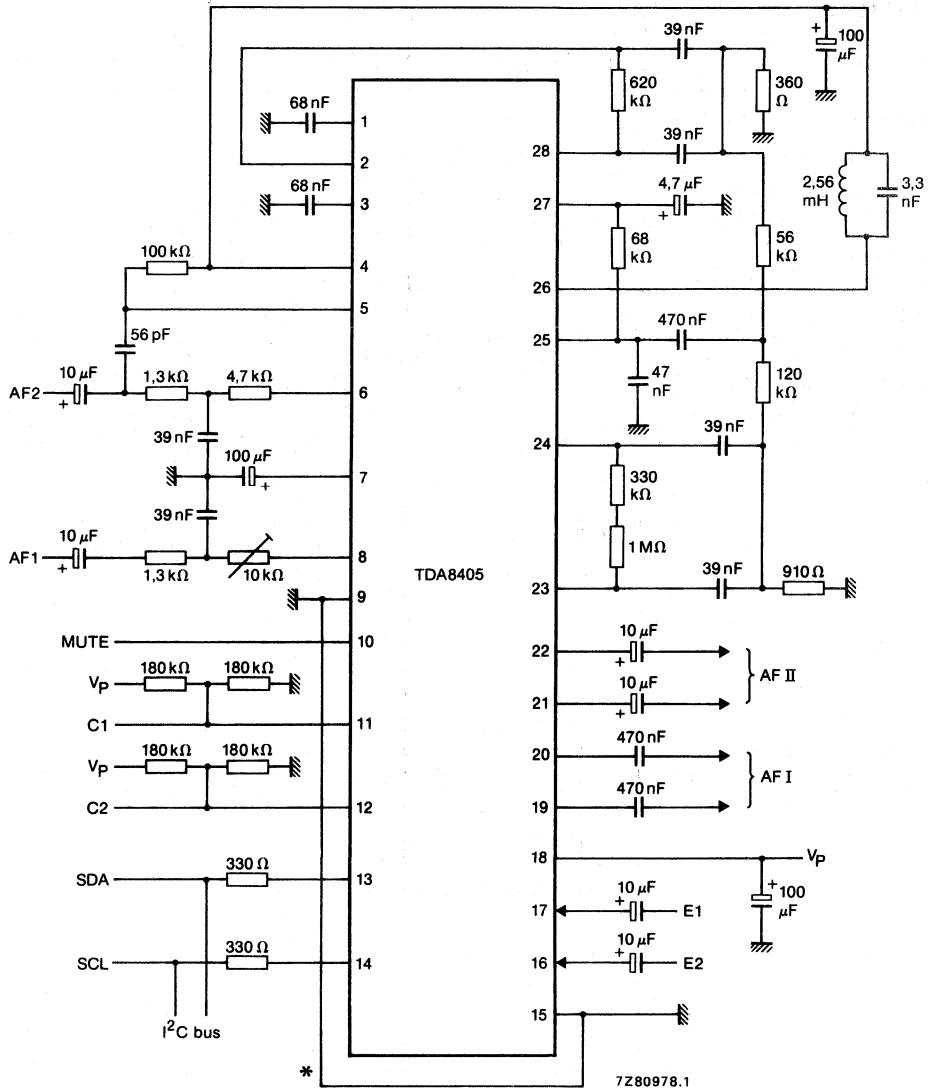

\* Direct connection between pins 9 and 15 is needed.

Fig. 2 Test circuit.

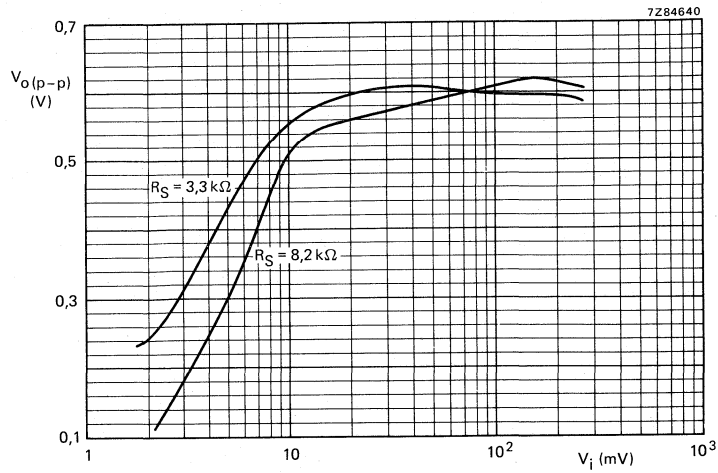


Fig. 3 Controlled output voltage as a function of the input signal ( $Q = 80$ ); pilot frequency  $f_o = 54$  kHz;  $R_S$  = source resistance.

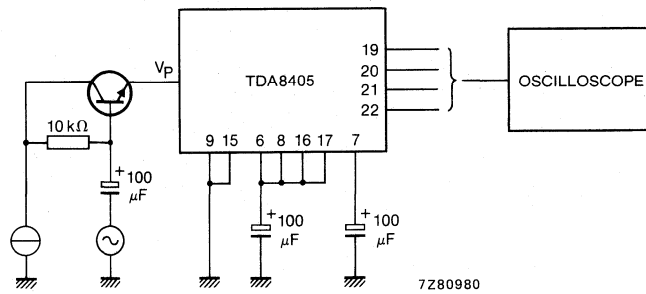


Fig. 4 Test circuit for ripple rejection: supply (d.c.) + pulse (r.m.s.) voltage at 100 Hz = 12 V + 50 mV.

DEVELOPMENT DATA

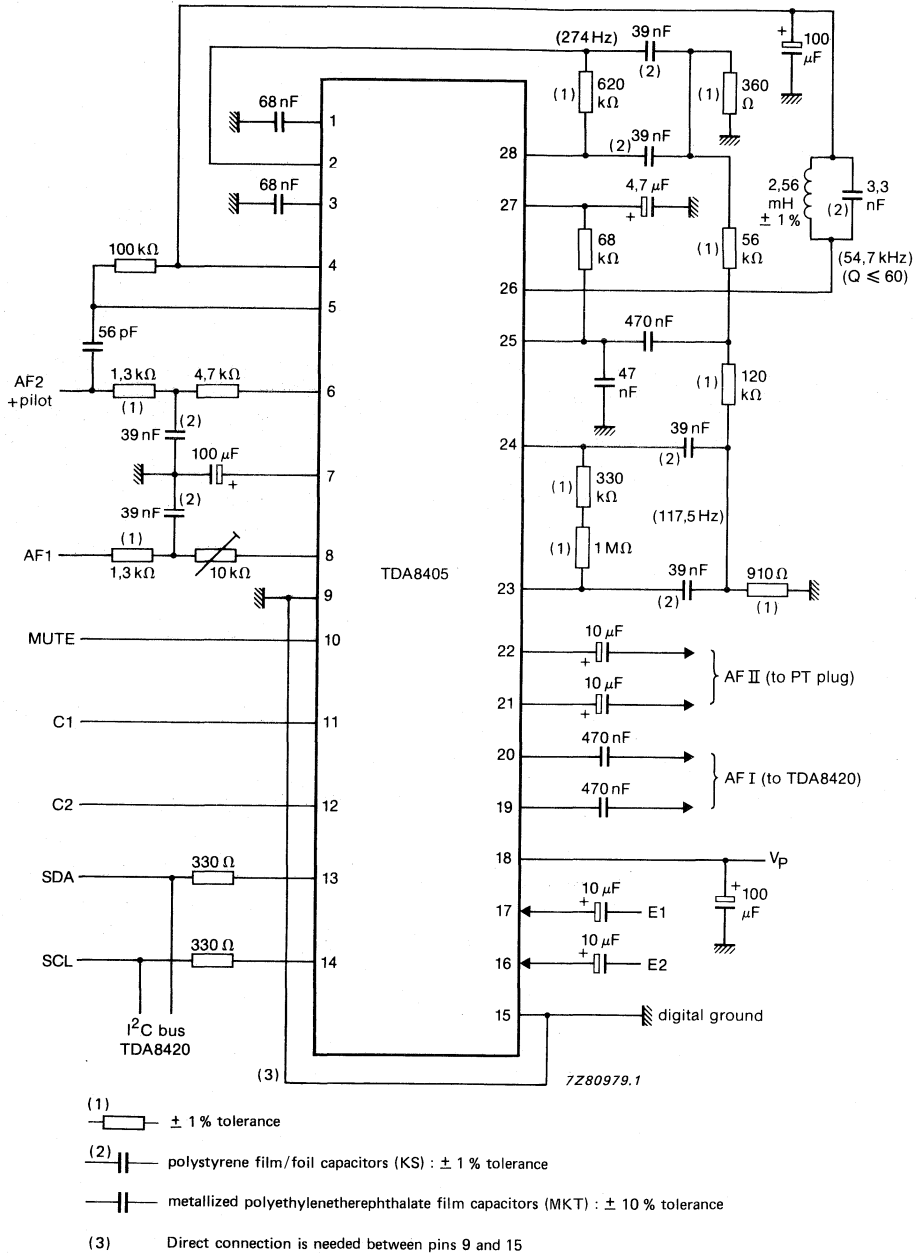


Fig. 5 Application diagram.





## HI-FI STEREO AUDIO PROCESSOR; I<sup>2</sup>C BUS

### GENERAL DESCRIPTION

The TDA8420 is a monolithic bipolar integrated stereo sound circuit with a loudspeaker channel (CH1) and a headphone channel (CH2), digital controlled via the I<sup>2</sup>C bus, for application in hi-fi audio and television sound.

### Features

- Input selector
- Mode selector
- Loudspeaker channel (CH1)
- Headphone channel (CH2) } with volume control, balance control and mute
- Pseudo stereo and spatial function
- Bass and treble control

### QUICK REFERENCE DATA

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 4)	V <sub>CC</sub>	7,5	12	14	V
Input signal handling	V <sub>I</sub>	2	—	—	V
Input sensitivity full power at the output stage	V <sub>i</sub>	—	200	—	mV
Signal plus noise-to-noise ratio	(S+N)/N	—	90	—	dB
Total harmonic distortion	THD	—	0,05	—	%
Channel separation	$\alpha$	—	75	—	dB
Volume control range CH1	G	-46	—	16	dB
Treble control range	G	-12	—	12	dB
Bass control range	G	-12	—	15	dB
Volume control range CH2	G	-62	—	0	dB

### PACKAGE OUTLINE

28-lead dual in-line; plastic (SOT-117).

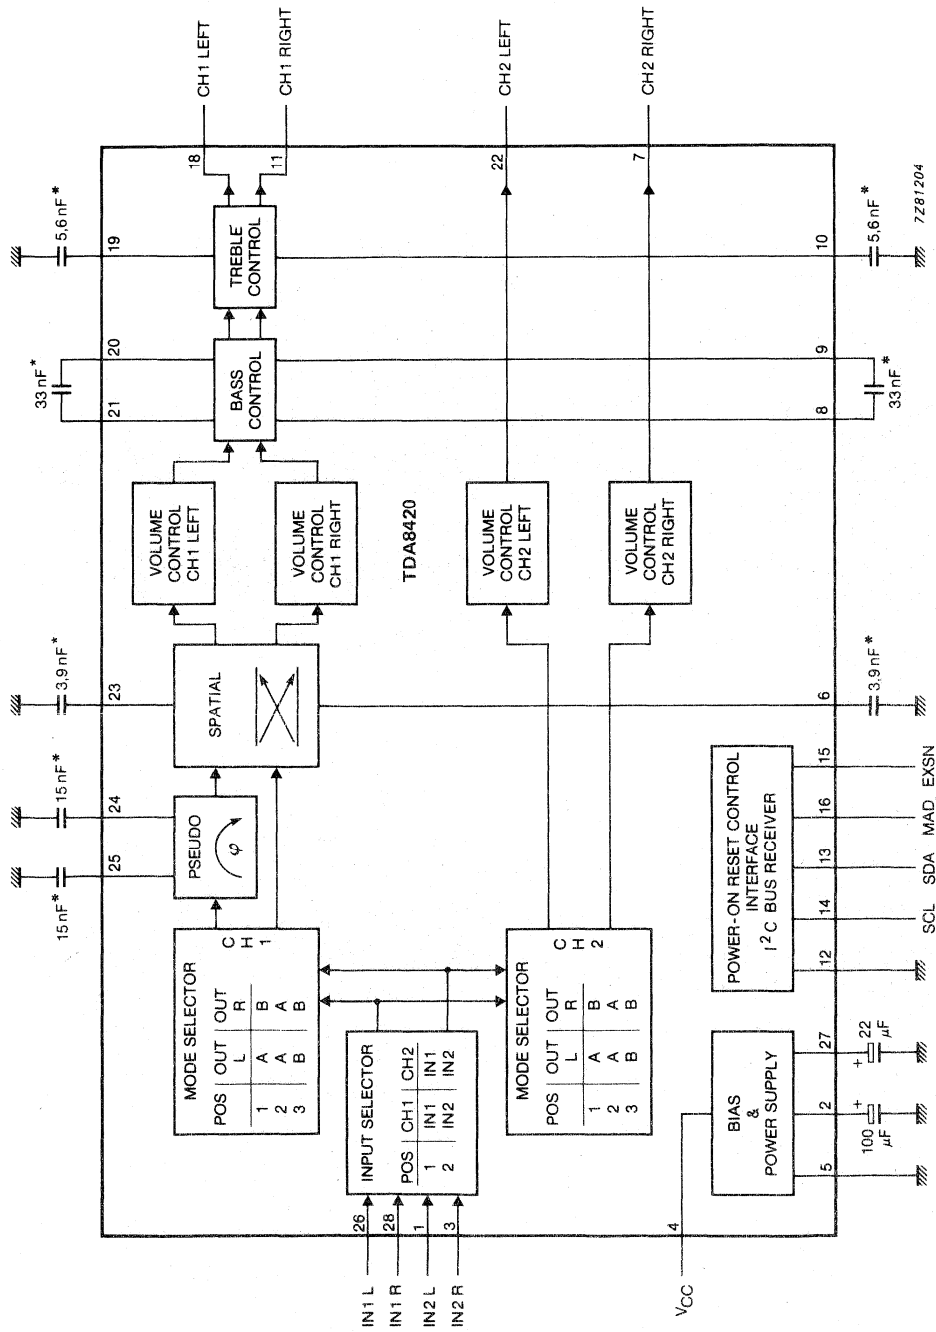


Fig. 1 Block diagram.

\* These values are dependent on the required frequency response and effect.



## PINNING

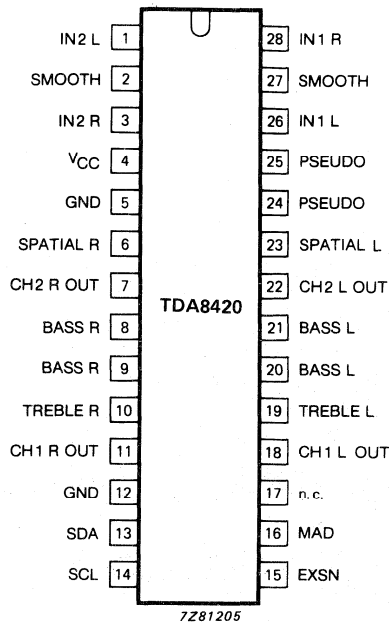


Fig. 2 Pinning diagram.

## FUNCTIONAL DESCRIPTION

## Input selector

The input to channel 1 (CH1) and channel 2 (CH2) is determined by the input selector. The selection is made from the following AF input signals:

- IN1 L (pin 26); IN1 R (pin 28)  
or
- IN2 L (pin 1); IN2 R (pin 3)

Where IN1 is an internal input signal and IN2 an external input signal.

## Mode selector

For each channel (CH1 and CH2) there is a mode selector which selects between stereo, sound A and sound B in the event of bilingual transmission. Both mode selectors can be controlled independently.

## Headphone channel (CH2)

## Volume control and balance

The stages for volume control for CH2 consist of two parts for left and right. In each part the gain can be adjusted between 0 and  $-62$  dB in steps of 2 dB. An additional step allows an attenuation of  $\geq 90$  dB. Both parts can be controlled independently over the whole range, which allows the balance to be varied by controlling the volume of left and right.

## Loudspeaker channel (CH1)

## Volume control and balance

The loudspeaker channel (CH1) also consists of two parts for volume control (left and right). In each part the gain can be adjusted between  $+16$  dB and  $-62$  dB in steps of 2 dB. An additional step allows an attenuation of  $\geq 90$  dB. Both parts can be controlled independently over the whole range, which allows the balance to be varied by controlling the volume of left and right.

**Stereo/pseudo stereo/spatial stereo mode**

It is possible to select three modes. Stereo, pseudo or spatial stereo. The pseudo stereo mode receives mono transmissions and the stereo and spatial stereo mode receives stereo transmissions.

**Bass control**

The bass control stage can be switched from an emphasis of 15 dB to an attenuation of 12 dB for low frequencies in steps of 3 dB.

**Treble control**

The treble control stage can be switched from + 12 dB to -12 dB in steps of 3 dB.

**Bias and power supply**

The TDA8420 includes a bias and power supply stage, which generates a voltage of  $\frac{1}{2} V_{CC}$  with a low output impedance and injector currents for the logic part.

**Power-on reset**

The on-chip power-on reset circuit sets the mute bit to active, which mutes both the loudspeaker channel (CH1) and the headphone channel (CH2). The muting can be switched by transmission of the mute bit.

**I<sup>2</sup>C bus receiver and data handling****Bus specification**

The TDA8420 is controlled via the 2-wire I<sup>2</sup>C bus by a microcomputer. The two wires (SDA – serial data, SCL – serial clock) carry information between the devices connected to the bus. Both SDA and SCL are bidirectional lines, connected to a positive supply voltage via a pull up resistor. When the bus is free both lines are HIGH. The data on the SDA line must be stable during the HIGH period of the clock. The HIGH or LOW state of the data line can only change when the clock signal on the SCL line is LOW. The set up and hold times are specified in AC CHARACTERISTICS.

A HIGH-to-LOW transition of the SDA line while SCL is HIGH is defined as a start condition.

A LOW-to-HIGH transition of the SDA line while SCL is HIGH is defined as a stop condition.

The bus receiver will be reset by the reception of a start condition. The bus is considered to be busy after the start condition. The bus is considered to be free again after a stop condition.

**Module address**

Data transmission to the TDA8420 starts with the module address MAD.




Fig. 3 TDA8420 module address.

The module address is determined by pin 16. When connected to ground MAD = 0; when connected to  $V_{CC}$  MAD = 1. Thus two TDA8420s can be selected within a system.

**Subaddress**

After the module address byte a second byte is used to select the functions for both channels:

- CH1 – Volume left, volume right, bass, treble and switch functions
- CH2 – Volume left, volume right and switch functions

The subaddress SAD is stored within the TDA8420. Table 1 defines the coding of the second byte after the module address MAD.

**Table 1** Second byte after module address MAD

function	128	64	32	16	8	4	2	1
	MSB 7	6	5	4	3	2	1	LSB 0
CH1	volume left	0	0	0	0	0	0	0
	volume right	0	0	0	0	0	0	1
	bass	0	0	0	0	0	0	1
	treble	0	0	0	0	0	0	1
	switch functions	0	0	0	0	1	0	0
CH2	volume left	0	0	0	0	0	1	0
	volume right	0	0	0	0	0	1	0
	switch functions	0	0	0	0	1	1	0
subaddress SAD								

**Definition of 3rd byte**

A third byte is used to transmit data to the TDA8420. Table 2 defines the coding of the third byte after module address MAD and subaddress SAD.

**Table 2** Third byte after module address MAD and subaddress SAD

function		MSB							LSB	
		7	6	5	4	3	2	1	0	
CH1	volume left	VL1	1	1	V05	V04	V03	V02	V01	V00
	volume right	VR1	1	1	V15	V14	V13	V12	V11	V10
	bass	BA	1	1	1	1	BA3	BA2	BA1	BA0
	treble	TR	1	1	1	1	TR3	TR2	TR1	TR0
	switch functions	S1	1	1	MU	EFL	STL	ML1	MLO	IS
CH2	volume left	VL2	1	1	V25	V24	V23	V22	V21	V20
	volume right	VR2	1	1	V35	V34	V33	V32	V31	V30
	switch functions	S2	1	1	1	1	EXS	MH1	MH0	1

**Truth tables**

Truth tables for the switch functions

**Table 3** Input selector

function	IS
IN1	0
IN2	1

**Table 4** Mode selectors

mode	CH1		CH2	
	ML0	ML1	MH0	MH1
stereo	1	1	1	1
sound A	1	0	1	0
sound B	0	1	0	1
-----	0	0	0	0

**Table 5** Stereo/pseudo stereo/spatial stereo

choice	STL	EFL
spatial	1	1
stereo	1	0
pseudo	0	1
-----	0	0

**Table 6** Mute

mute	MU
active; automatic after POR	1
not active	0

**Table 7** Output for external switch

EXSN	EXS
ground	1
open collector	0

Where: POR = Power-On Reset.

Truth tables for the volume base and treble controls.

**Table 8** Volume control

CH1	CH2	Vx5	Vx4	Vx3	Vx2	Vx1	Vx0
16	0	1	1	1	1	1	1
-46	-62	1	0	0	0	0	0
≤ -90	≤ -90	0	1	1	1	1	1
≤ -90	≤ -90	0	0	0	0	0	0

Where: The values of CH1 and CH2 are in 2 dB/step measured in dBs.

Table 9 Bass control

3dB/step (dB)	BA3	BA2	BA1	BA0
15	1	1	1	1
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
15	1	0	1	1
12	1	0	1	0
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
0	0	1	1	0
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
-12	0	0	1	0
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
-12	0	0	0	0

Table 10 Treble control

3dB/step (dB)	TR3	TR2	TR1	TR0
12	1	1	1	1
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
12	1	0	1	0
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
0	0	1	1	0
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
-12	0	0	1	0
---	---	---	---	---
---	---	---	---	---
---	---	---	---	---
-12	0	0	0	0

**Sequence of data transmission**

After a power-on reset all eight functions have to be adjusted with eight data transmissions. It is recommended that data information for switch functions in CH1 are transmitted last because all functions have to be adjusted when the muting is switched off. The sequence of transmission of other data information is not critical.

The order of data transmission is shown in Figures 4 and 5. The number of data transmissions is unrestricted but before each data byte the module address MAD and the correct subaddress SAD is required.

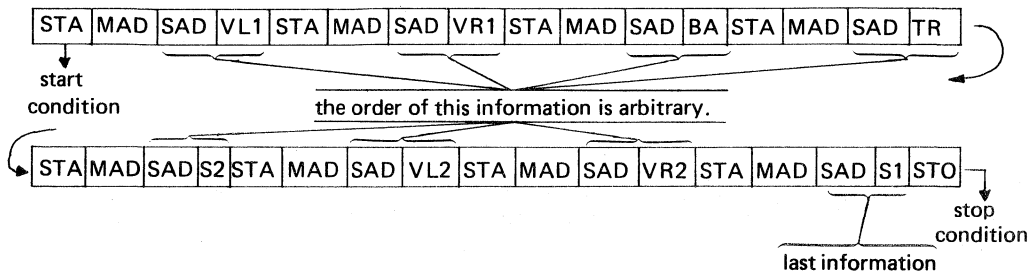


Fig. 4 Data transmission after a power-on reset.




Fig. 5 Data transmission except after power-on reset.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage	V <sub>CC</sub>	0	16	V
Voltage range for external capacitors				
pins 2, 6, 8 to 10, 19 to 21, 23 to 25, 27	V <sub>cap</sub>	0	V <sub>CC</sub>	V
pin 13	V <sub>SDA</sub>	0	V <sub>CC</sub>	V
pin 14	V <sub>SCL</sub>	0	V <sub>CC</sub>	V
pin 15	V <sub>EXSN</sub>	0	V <sub>CC</sub>	V
pin 16	V <sub>MAD</sub>	0	V <sub>CC</sub>	V
Input voltage range				
at pins 1, 3, 7, 11, 18, 22, 26, 28	V <sub>I</sub>	0	V <sub>CC</sub>	V
Output voltage range				
at pins 1, 3, 7, 11, 18, 22, 26, 28	V <sub>O</sub>	0	V <sub>CC</sub>	V
Output current at pins 7, 11, 18, 22	I <sub>O</sub>	—	45	mA
Total power dissipation				
at T <sub>amb</sub> < 70 °C	P <sub>tot</sub>	—	1350	mW
Operating ambient temperature range	T <sub>amb</sub>	0	70	°C
Storage temperature range	T <sub>stg</sub>	−25	150	°C

## DC CHARACTERISTICS

 $V_{CC} = 12\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
Supply voltage (pin 4)	$V_{CC}$	7,5	12	14	V
Supply current at $V_{CC} = 12\text{ V}$	$I_{CC}$	—	42	55	mA
Input voltage IN1 L, IN1 R, IN2 L, IN2 R DC voltage internally generated; capacitive coupling recommended	$V_I$	5,4	6,0	6,6	V
MAD (pin 16) input voltage HIGH	$V_{IH}$	3,0	—	$V_{CC}$	V
input voltage LOW	$V_{IL}$	0	—	1,5	V
input current HIGH	$I_{IH}$	—	—	1,0	$\mu\text{A}$
input current LOW	$I_{IL}$	—	1	10	$\mu\text{A}$
SDA; SCL (pins 13 and 14) input voltage HIGH	$V_{IH}$	3,0	—	$V_{CC}$	V
input voltage LOW	$V_{IL}$	-0,3	—	1,5	V
input current HIGH	$I_{IH}$	—	—	1,0	$\mu\text{A}$
input current LOW	$I_{IL}$	—	1	10	$\mu\text{A}$
Output voltage CH1 (pins 11 and 18); CH2 (pins 7 and 22)	$V_O$	5,4	$\frac{1}{2} V_{CC}$	6,6	V
External capacitors pins 6 to 10; 19 to 21; 23 to 25	$V_{cap.n}$	—	$\frac{1}{2} V_{CC}$	—	V
pin 2	$V_{cap.2}$	—	$V_{CC}-0,1$	—	V
External switch (pin 15) at $I_{EXSN} = 1\text{ mA}$					
Output voltage HIGH	$V_{EXSNH}$	—	—	16	V
Output voltage LOW	$V_{EXSNL}$	—	—	0,3	V



**AC CHARACTERISTICS**

$V_{CC} = 12\text{ V}$ ; bass/treble in linear position; pseudo and spatial stereo off;  $R_L > 10\text{ k}\Omega$ ;  $C_L < 100\text{ pF}$ ;  
 $T_{amb} = 25\text{ }^\circ\text{C}$  unless otherwise specified.

parameter	symbol	min.	typ.	max.	unit
<b>I<sup>2</sup>C bus timing</b> (see Fig. 6)					
SDA, SCL (pin 13 and 14)					
Clock frequency range	$f_{SCL}$	0	—	100	kHz
The HIGH period of the clock	$t_{HIGH}$	4	—	—	$\mu\text{s}$
The LOW period of the clock	$t_{LOW}$	4,7	—	—	$\mu\text{s}$
SCL rise time	$t_r$	—	—	1	$\mu\text{s}$
SCL fall time	$t_f$	—	—	0,3	$\mu\text{s}$
Set-up time for start condition	$t_{SU; STA}$	4,7	—	—	$\mu\text{s}$
Hold time for start condition	$t_{HD; STA}$	4	—	—	$\mu\text{s}$
Set-up time for stop condition	$t_{SU; STO}$	4,7	—	—	$\mu\text{s}$
Time bus must be free before a new transmission can start	$t_{BUF}$	4,7	—	—	$\mu\text{s}$
Set-up time DATA	$t_{SU; DAT}$	250	—	—	ns
<b>Input signals</b>					
IN1 L (pin 26) IN1 R (pin 28) IN2 L (pin 1) IN2 R (pin 3)					
Input signal handling (r.m.s. value) at $V_U = -4\text{ dB}$ ; THD $\leq 0,5\%$	$V_{i(rms)}$	2	—	—	V
Input resistance	$R_{n-5}$	35	50	—	$\text{k}\Omega$
Frequency response ( $-0,5\text{ dB}$ ) bass and treble in linear position; stereo mode; effects off	f	20	—	20 000	Hz

## AC CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>LOUDSPEAKER CHANNEL OUTPUTS</b>					
CH1 LEFT (pin 18); CH1 RIGHT (pin 11)					
Output voltage range (r.m.s. value) at THD $\leq 0,5\%$					
	$V_{o(rms)}$	2	—	—	V
Load resistance	$R_L$	10	—	—	$k\Omega$
Output impedance	$Z_O$	—	—	100	$\Omega$
Noise level					
weighted according to CCIR468-2					
gain = 16 dB	$V_n$	—	90	—	$\mu V$
gain = 0 dB	$V_n$	—	20	40	$\mu V$
gain = $\leq -90$ dB	$V_n$	—	15	—	$\mu V$
Total harmonic distortion (f = 20 Hz to 12,5 kHz)					
for $V_{i(rms)} = 0,5$ V; gain = + 16 dB to -30 dB	THD	—	0,05	0,2	%
for $V_{i(rms)} = 1,0$ V; gain = + 2 dB to -30 dB	THD	—	0,07	0,2	%
for $V_{i(rms)} = 2,0$ V; gain = -4 dB to -30 dB	THD	—	0,1	—	%
Channel separation at 10 kHz gain = 0 dB	$\alpha_{cr}$	—	75	—	dB
Ripple rejection (gain = 0 dB; bass and treble in linear position) $f_{ripple} = 100$ Hz	RR <sub>100</sub>	—	50	—	dB
Crosstalk attenuation from logic inputs to AF outputs (gain = 0 dB; bass and treble in linear position)	$\alpha_L$	—	110	—	dB
<b>VOLUME CONTROL</b>					
For truth table see Table 8					

parameter	symbol	min.	typ.	max.	unit
<b>Loudspeaker channel (CH1)</b>					
Control range at f = 1 kHz					
maximum voltage gain (16 dB step)	G <sub>max</sub>	15	—	—	dB
minimum voltage gain (−46 dB step)	G <sub>min</sub>	−43	—	—	dB
last position	G <sub>off</sub>	−80	−85	—	dB
mute position	G <sub>mute</sub>	−85	−90	—	dB
Resolution	G <sub>step</sub>	—	2	—	dB/step
Gain difference between left and right AF channel (note 1)					
gain from 16 dB to −30 dB	ΔG	—	—	0,5	dB
gain from −30 dB to −46 dB	ΔG	—	—	1	dB
<b>TREBLE CONTROL (CH1)</b>					
For truth table see Table 10					
Control range					
for C <sub>10-5</sub> ; C <sub>19-5</sub> = 5,6 nF					
Maximum emphasis at 15 kHz with respect to linear position	G	11	12	13	dB
Maximum attenuation at 15 kHz with respect to linear position	G	11	12	13	dB
Resolution	G <sub>step</sub>	—	3	—	dB/step
<b>BASS CONTROL</b>					
For truth table see Table 9					
Control range					
for C <sub>8-9</sub> ; C <sub>20-21</sub> = 33 nF					
Maximum emphasis at 40 kHz with respect to linear position	G	14	15	16	dB
Maximum attenuation at 40 kHz with respect to linear position	G	11	12	13	dB
Resolution	G <sub>step</sub>	—	3	—	dB/step
<b>SPATIAL AND PSEUDO FUNCTION</b>					
Spatial:					
Antiphase crosstalk	α	—	50	—	%
Pseudo:					
Phase shift			(see Fig. 15)		

## AC CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>HEADPHONE CHANNEL OUTPUTS</b>					
CH2 LEFT (pin 22); CH2 RIGHT (pin 7)					
Output voltage range (r.m.s. value) at THD $\leq 0,5\%$	$V_{o(rms)}$	2	—	—	V
Load resistance	$R_L$	10	—	—	$k\Omega$
Output impedance	$Z_O$	—	—	100	$\Omega$
Noise level					
(weighted according to CCIR468-2)					
gain = 0 dB	$V_n$	—	15	—	$\mu V$
gain = 16 dB	$V_n$	—	12	25	$\mu V$
gain = $\leq -90$ dB	$V_n$	—	10	—	$\mu V$
Total harmonic distortion					
(f = 20 Hz to 12,5 kHz)					
for $V_{i(rms)} = 0,2$ V; gain = 0 dB to -30 dB	THD	—	0,01	0,2	%
for $V_{i(rms)} = 1,0$ V; gain = 0 dB to -30 dB	THD	—	0,1	—	%
for $V_{i(rms)} = 2,0$ V gain = -4 dB to -30 dB	THD	—	0,3	—	%
Channel separation at 10 kHz					
gain = 0 dB	$\alpha_{cr}$	—	75	—	dB
Ripple rejection (gain = 0 dB; bass and treble in linear position)					
$f_{ripple} = 100$ Hz	$RR_{100}$	—	50	—	dB
Crosstalk attenuation from logic inputs to AF outputs (gain = 0 dB; bass and treble in linear position)					
	$\alpha_L$	—	110	—	dB
Crosstalk between any input/output					
f = 100 Hz to 12,5 kHz	$\alpha$	65	70	—	dB
Crosstalk IN1/IN2					
gain = 0 dB; $R_G = 0$	$\alpha$	95	100	—	dB

parameter	symbol	min.	typ.	max.	unit
<b>Headphone channel (CH2)</b>					
Control range					
maximum voltage gain (0 dB step)	$G_{\max}$	-1	—	—	dB
minimum voltage gain (-62 dB step)	$G_{\min}$	-57	—	—	dB
last position	$G_{\text{off}}$	-80	-85	—	dB
mute position	$G_{\text{mute}}$	-85	-90	—	dB
Resolution	$G_{\text{step}}$	—	2	—	dB/step
Gain difference between left and right AF channel (note 1)					
gain from 0 dB to -40 dB	$\Delta G$	—	—	0,5	dB
gain from -40 dB to -62 dB	$\Delta G$	—	—	2	dB

**Note to the AC characteristics**

1. Balance is realized via software by different volume settings in both channels.

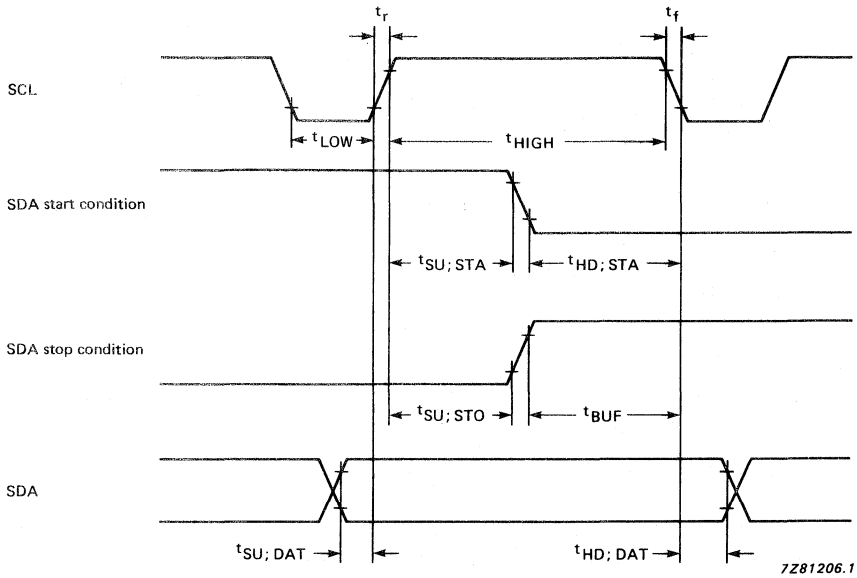


Fig. 6 Timing requirements for I<sup>2</sup>C bus.

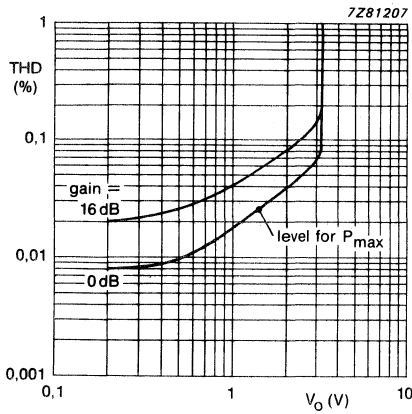


Fig. 7 Distortion loudspeaker channel CH1 as a function of the output voltage with gain as parameter.

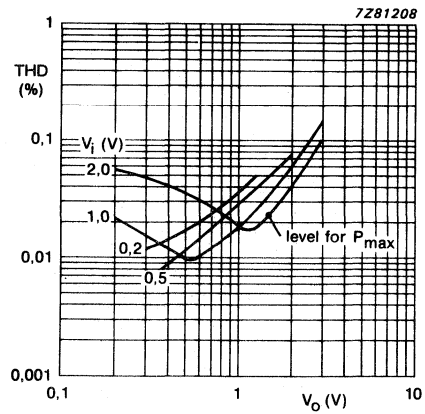


Fig. 8 Distortion loudspeaker channel CH1 as a function of the output voltage with input voltage as parameter.

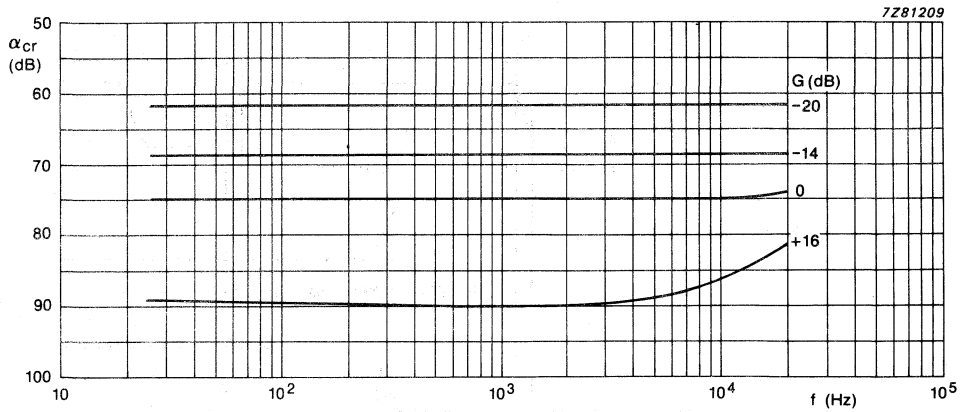


Fig. 9 Channel separation loudspeaker channel CH1 as a function of frequency.

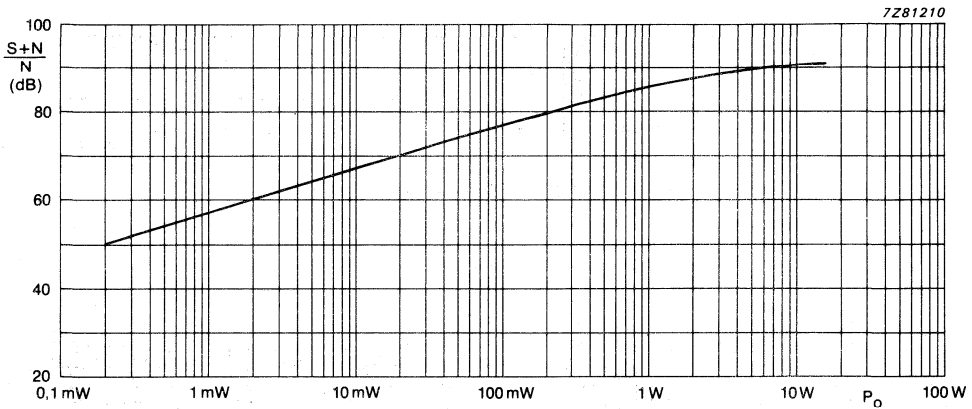


Fig. 10 Signal-to-noise ratio as a function of output power.  
Input voltage  $V_i = 0,5$  V; according to CCIR; quasi peak;  $P_o = 15$  W.

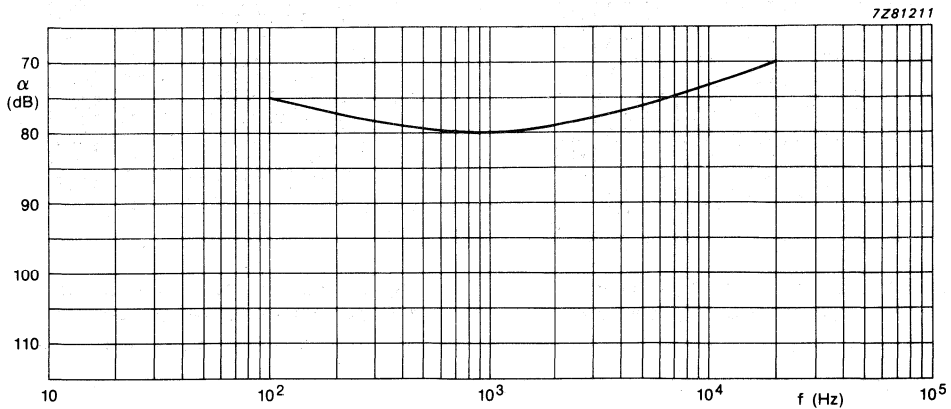


Fig. 11 Crosstalk 2-tone mode as a function of frequency.  
CH1: mode AA, Gain + 16 dB; CH2: mode BB, Gain 0 dB. Signal input RIGHT; input LEFT to ground, measured at output CH1.

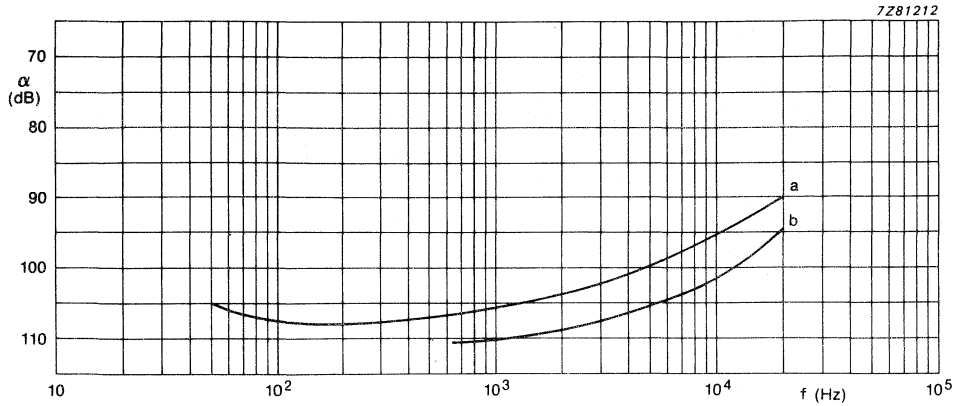


Fig. 12 Crosstalk between IN1 and IN2 as a function of frequency; measured at output CH1,  $R_G = 0$ .  
 a) Gain = + 16 dB;  $V_i = 200$  mV. b) Gain = 0 dB;  $V_i = 1$  V.

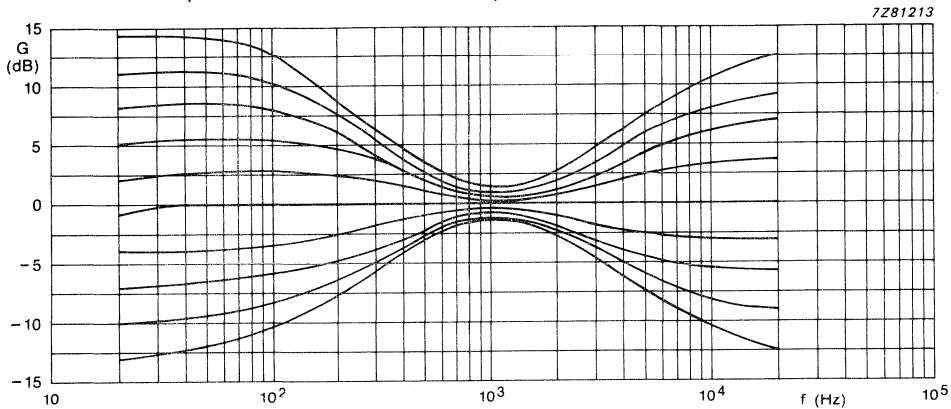


Fig. 13 Bass and treble tone control.  $C_{bass} = 33$  nF,  $C_{treble} = 5,6$  nF.


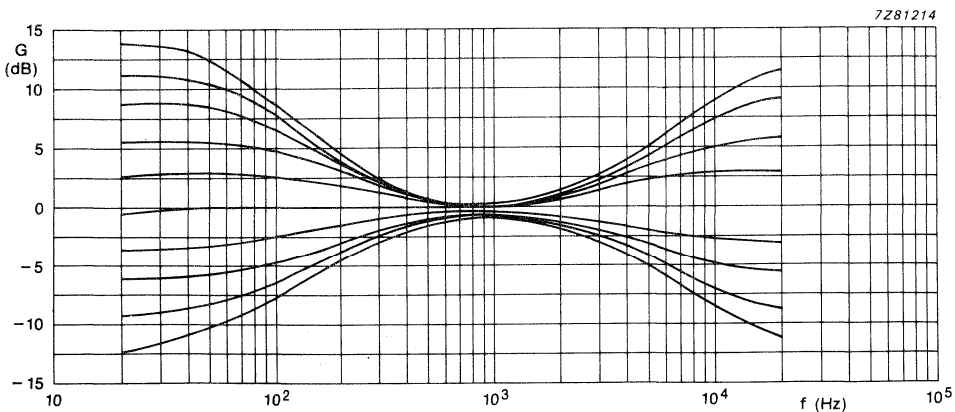


Fig. 14 Bass and treble tone control.  $C_{bass} = 68$  nF,  $C_{treble} = 3,9$  nF.



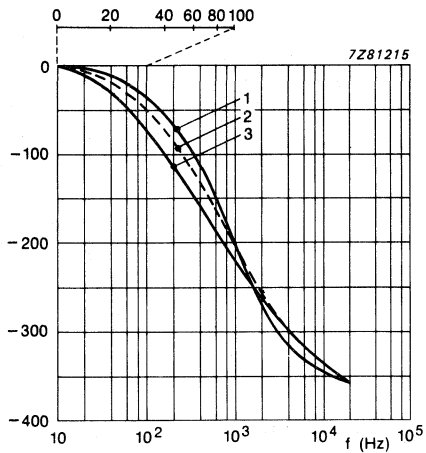

curve	C24 (nF)	C25 (nF)	effect
1	15	15	normal
2	5,6	47	intensified
3	5,6	68	more intensified

Fig. 15 Pseudo (phase) as a function of frequency CH1 left.


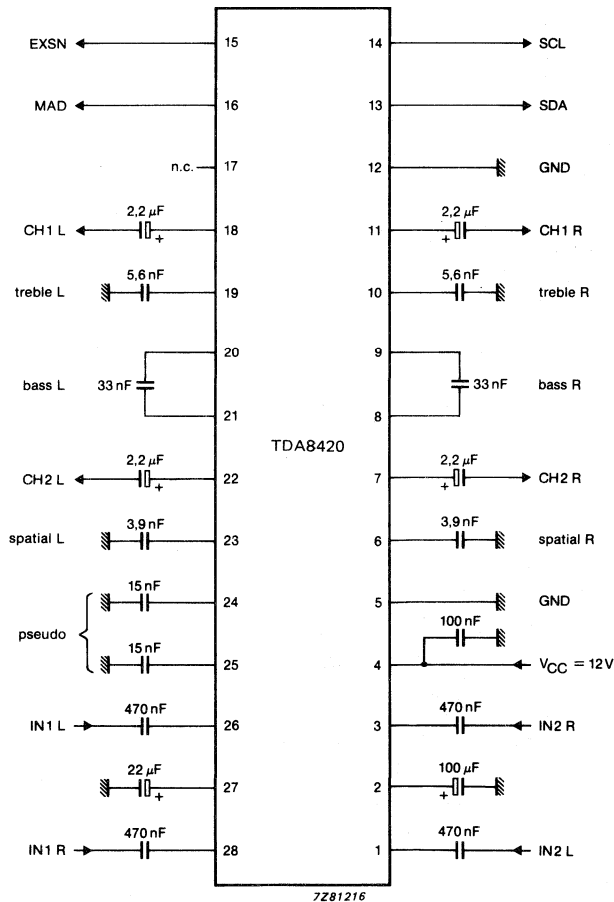


Fig. 16 Test and application circuit diagram.

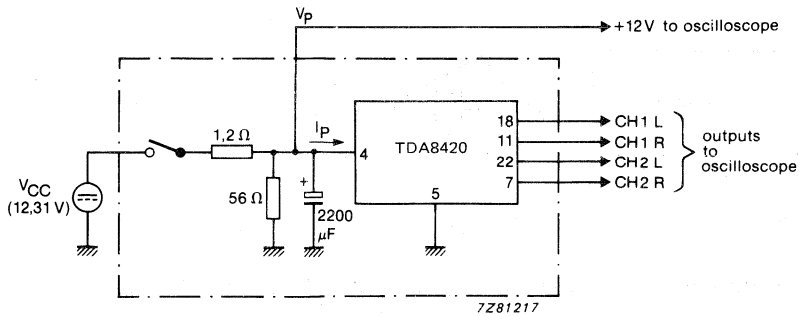

$I_{CC} = 45 \text{ mA};$   
 $I_{load} = 259 \text{ mA};$   
 $t_{on} = 2,64 \text{ ms};$   
 $t_{off} = 102 \text{ ms}.$

Fig. 17 Turn-on/off power supply circuit diagram.

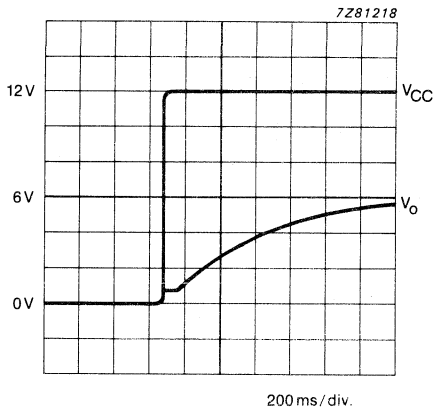


Fig. 18 Turn-on behaviour;  
 $C = 2,2 \mu\text{F}; R_L = 10 \text{ k}\Omega.$

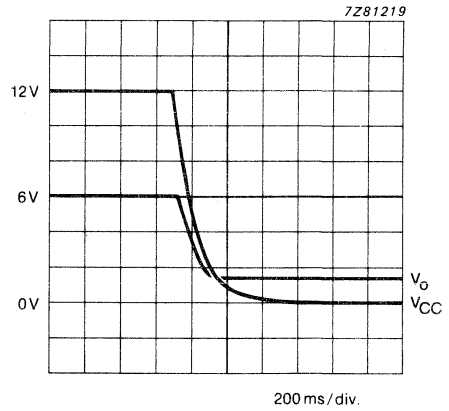


Fig. 19 Turn-off behaviour;  
 without modulation.

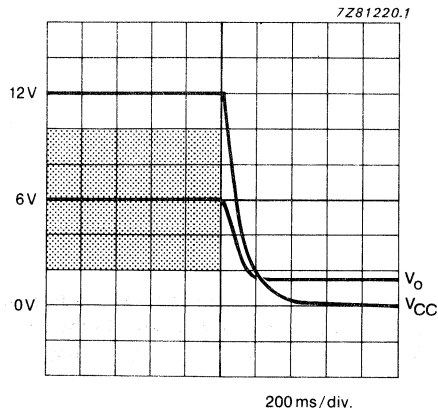


Fig. 20 Turn-off behaviour; with modulation (shaded area).

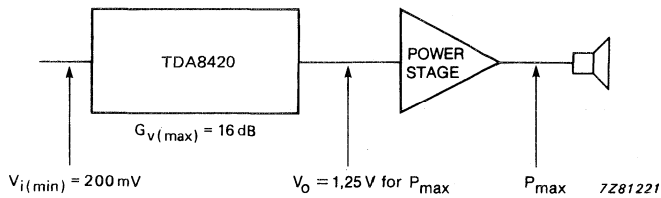


Fig. 21 Level diagram loudspeaker channel CH1 with  $V_{i(min)} = 200 \text{ mV}$ ;  $V_o = 1,25$  for  $P_{max}$ .


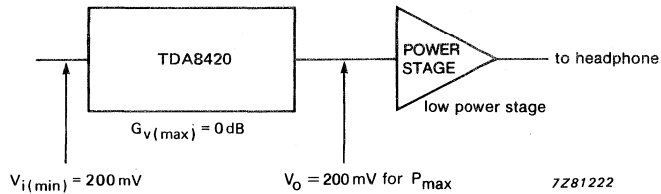


Fig. 22 Level diagram headphone channel CH2 with  $V_i = 200 \text{ mV}$ ;  $V_o = 200 \text{ mV}$  for  $P_{max}$ .



Purchase of Philips' I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C-system provided the system conforms to the I<sup>2</sup>C specifications defined by Philips.



# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.



TDA8440

## SWITCH FOR CTV RECEIVERS

### GENERAL DESCRIPTION

The TDA8440 is a versatile video/audio switch, intended to be used in CTV receivers equipped with an AUXILIARY VIDEO/AUDIO plug.

It provides two 3-state switches for audio channels and one 3-state switch for the video channel and a video amplifier with selectable gain (times 1 or times 2).

The integrated circuit can be used in conjunction with a microcontroller from the MAB8400 family, and is controlled via a bidirectional I<sup>2</sup>C bus. Sufficient sub-addressing is provided for the I<sup>2</sup>C bus mode. It can also be controlled directly by d.c. switching signals.

### Features

- Combined analogue and digital circuitry gives maximum flexibility in channel switching
- 3-state switches for all channels
- Selectable gain for the video channels
- Sub-addressing facility
- I<sup>2</sup>C bus or non-I<sup>2</sup>C bus mode (controlled by d.c. voltages)
- Slave receiver in the I<sup>2</sup>C bus mode
- External OFF command
- System expansion possible up to 7 devices (14 sources)
- Static short-circuit proof outputs

### QUICK REFERENCE DATA


---

Supply voltage range	V <sub>15-4</sub>	10 to 13,2 V
Supply current (without load)	I <sub>15</sub>	typ. 33 mA max. 50 mA
Storage temperature	T <sub>stg</sub>	max. + 125 °C
Operating ambient temperature range	T <sub>amb</sub>	0 to + 70 °C

---

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

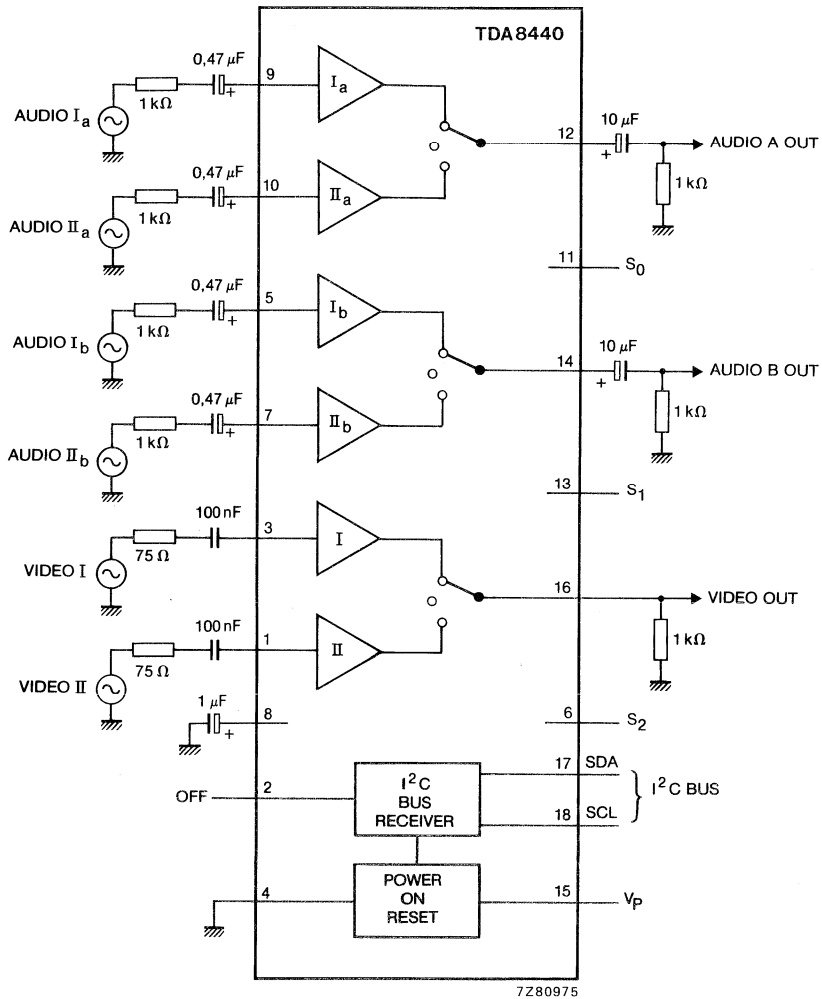

S0, S1, S2 and OFF (pins 11, 13, 6 and 2) connected to V<sub>p</sub> or GND.

If more than 1 device is used, then the outputs and the pins 8 (bias decoupling of the audio inputs) may be connected in parallel.

Fig. 1 Block diagram and test circuit.

**FUNCTIONAL DESCRIPTION**

The TDA8440 is a monolithic system of switches and can be used in CTV receivers equipped with an AUXILIARY VIDEO/AUDIO plug.

The IC incorporates 3-state switches they comprise:

- a) An electronic video switch with selectable gain (times 1 or times 2) for switching between an internal video signal (from the IF amplifier) and an AUXILIARY input signal.
- b) Two electronic audio switches, for two sound channels (stereo or dual language), for switching between internal audio sources and signals from the AUXILIARY VIDEO/AUDIO plug.

A selection can be made between two input signals and an OFF-state. The OFF-state is necessary if more than one TDA8440 device is used.

The SDA and SCL pins can be connected to the I<sup>2</sup>C bus or to d.c. switching voltages. Inputs S<sub>0</sub> (pin 11), S<sub>1</sub> (pin 13), and S<sub>2</sub> (pin 6) are used for selection of sub-addresses or switching to the non-I<sup>2</sup>C mode. Inputs S<sub>0</sub>, S<sub>1</sub> and S<sub>2</sub> can be connected to the supply voltage (H) or to ground (L). In this way no peripheral components are required for selection.

**Table 1** Sub-addressing

S <sub>2</sub>	S <sub>1</sub>	S <sub>0</sub>	sub-address		
			A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>
L	L	L	0	0	0
L	L	H	0	0	1
L	H	L	0	1	0
L	H	H	0	1	1
H	L	L	1	0	0
H	L	H	1	0	1
H	H	L	1	1	0
H	H	H	non I <sup>2</sup> C addressable		

DEVELOPMENT DATA

**NON-I<sup>2</sup>C BUS CONTROL**

If the TDA8440 switching device has to be operated via the AUXILIARY VIDEO/AUDIO plug, inputs S<sub>2</sub>, S<sub>1</sub> and S<sub>0</sub> must be connected to the supply line (12 V).

The sources (internal and external) and the gain of the video amplifier can be selected via the SDA and SCL pins with the switching voltage from the AUXILIARY VIDEO/AUDIO plug:

- Sources I are selected if SDA = 12 V (external source)
- Sources II are selected if SDA = 0 V (TV mode)
- Video amplifier gain is 2 x if SCL = 12 V (external source)
- Video amplifier gain is 1 x if SCL = 0 V (TV mode)

If more than one TDA8440 device is used in the non-I<sup>2</sup>C bus system, the OFF pin can be used to switch off the desired devices. This can be done via the 12 V switching voltage on the AUXILIARY VIDEO/AUDIO plug.

- All switches are in the OFF position if OFF = H (12 V)
- All switches are in the selected position via SDA and SCL pins if OFF = L (0 V)

**I<sup>2</sup>C BUS CONTROL**

Detailed information on the I<sup>2</sup>C bus is available on request.

**Table 2** TDA8440 I<sup>2</sup>C bus protocol.

STA	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>	R/W	AC	D <sub>7</sub>	D <sub>6</sub>	D <sub>5</sub>	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>1</sub>	D <sub>0</sub>	AC	STO
-----	----------------	----------------	----------------	----------------	----------------	----------------	----------------	-----	----	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----	-----

STA = start condition

A<sub>6</sub> = 1  
 A<sub>5</sub> = 0  
 A<sub>4</sub> = 0  
 A<sub>3</sub> = 1

} Fixed address bits

A<sub>2</sub> = sub-address bit, fixed via S<sub>2</sub> input

A<sub>1</sub> = sub-address bit, fixed via S<sub>1</sub> input

A<sub>0</sub> = sub-address bit, fixed via S<sub>0</sub> input

R/W = read/write bit (has to be 0, only write mode allowed)

AC = acknowledge bit (= 0) generated by the TDA8440

D<sub>7</sub> = 1 audio Ia is selected to audio output a

D<sub>7</sub> = 0 audio Ia is not selected

D<sub>6</sub> = 1 audio IIa is selected to audio output a

D<sub>6</sub> = 0 audio IIa is not selected

D<sub>5</sub> = 1 audio Ib is selected to audio output b

D<sub>5</sub> = 0 audio Ib output is not selected

D<sub>4</sub> = 1 audio IIb is selected to audio output b

D<sub>4</sub> = 0 audio IIb is not selected

D<sub>3</sub> = 1 video I is selected to video output

D<sub>3</sub> = 0 video I is not selected

D<sub>2</sub> = 1 video II is selected to video output

D<sub>2</sub> = 0 video II is not selected

D<sub>1</sub> = 1 video amplifier gain is times 2

D<sub>1</sub> = 0 video amplifier gain is times 1

D<sub>0</sub> = 1 OFF-input inactive

D<sub>0</sub> = 0 OFF-input active

STO = stop condition

**OFF FUNCTION**

With the OFF input all outputs can be switched off (mode high ohmic), depending on the value of D<sub>0</sub>.

**D<sub>0</sub>/OFF gating**

D <sub>0</sub>	OFF input	Outputs
0 (off input active)	H	OFF
0	L	in accordance with last defined
1 (off input inactive)	H	D <sub>7</sub> -D <sub>1</sub> (may be entered while OFF = HIGH)
1	L	in accordance with D <sub>7</sub> -D <sub>1</sub>



**Power-on reset**

The circuit is provided with a power-on reset function.

When the power supply is switched on an internal pulse will be generated that will reset the internal memory  $S_0$ , in the initial state all the switches will be in the off position and the OFF input is active ( $D_7-D_0 = 0$ ) ( $I^2C$  mode), position defined via SDA and SCL inputs (non- $I^2C$  mode).

When the power supply decreases below 5 V a pulse will be generated and the internal memory will be reset. The behaviour of the switches will be the same as described above.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

		min.	typ.	max.	unit
Supply voltage	pin 15 $V_p$	—	—	14	V
Input voltage range	pin 17 $V_{SDA}$	-0,3	—	$V_p + 0,3$	V
	pin 18 $V_{SCL}$	-0,3	—	$V_p + 0,3$	V
	pin 2 $V_{OFF}$	-0,3	—	$V_p + 0,3$	V
	pin 11 $V_{S0}$	-0,3	—	$V_p + 0,3$	V
	pin 13 $V_{S1}$	-0,3	—	$V_p + 0,3$	V
	pin 6 $V_{S2}$	-0,3	—	$V_p + 0,3$	V
Video output current	pin 16 $-I_{16}$	—	—	50	mA
Storage temperature range	$T_{stg}$	—	—	+ 125	$^{\circ}C$
Operating ambient temperature range	$T_{amb}$	0	—	+ 70	$^{\circ}C$
Junction temperature	$T_j$	—	—	+ 150	$^{\circ}C$

DEVELOPMENT DATA

**THERMAL RESISTANCE**

From junction to ambient  
in free air

$$R_{th\ j-a} = 50 \text{ K/W}$$

## CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_p = 12\text{ V}$ ; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage	$V_{15-4}$	10	—	13,2	V
Supply current (without load)	$I_{15}$	—	37	50	mA
<b>Video switch</b>					
Input coupling capacitor	$C_{1C3}$	100	—	—	nF
Voltage gain (times 1; SLC = L)	$A_{3-16}$	-1	0	+1	dB
(times 2; SCL = H)	$A_{3-16}$	+5	+6	+7	dB
Voltage gain (times 1; SCL = L)	$A_{1-16}$	-1	0	+1	dB
(times 2; SCL = H)	$A_{1-16}$	+5	+6	+7	dB
Input video signal amplitude (gain times 1)	$V_{3-4}$	—	—	4,5	V
Input video signal amplitude (gain times 1)	$V_{1-4}$	—	—	4,5	V
Output impedance	$Z_{16-4}$	—	7	—	$\Omega$
Output impedance in 'OFF' state	$Z_{16-4}$	100	—	—	k $\Omega$
Isolation (off state) ( $f_0 = 5\text{ MHz}$ )		60	—	—	dB
Signal-to-noise ratio (note 2)	S/S + N	60	—	—	dB
Output top-sync level	$V_{16-4}$	2,4	2,8	3,2	V
Differential gain	G	—	—	3	%
Minimum crosstalk attenuation (note 1)	$V_{16-4}$	60	—	—	dB
Supply voltage rejection (note 3)	RR	36	—	—	dB
Bandwidth (1 dB)	B	10	—	—	MHz
Crosstalk attenuation for interference caused by bus signals (source impedance 75 $\Omega$ )	$\alpha$	60	—	—	dB
<b>Audio switch a and b</b>					
Input signal level	$V_{9-4}(\text{rms})$	—	—	2	V
	$V_{10-4}(\text{rms})$	—	—	2	V
	$V_{5-4}(\text{rms})$	—	—	2	V
	$V_{7-4}(\text{rms})$	—	—	2	V
Input impedance	$Z_{9-4}$	50	100	—	k $\Omega$
	$Z_{10-4}$	50	100	—	k $\Omega$
	$Z_{5-4}$	50	100	—	k $\Omega$
	$Z_{7-4}$	50	100	—	k $\Omega$
Output impedance	$Z_{12-4}$	—	—	10	$\Omega$
	$Z_{14-4}$	—	—	10	$\Omega$
Output impedance (off state)	$Z_{14-4}$	100	—	—	k $\Omega$

## DEVELOPMENT DATA

parameter	symbol	min.	typ.	max.	unit
Voltage gain	V <sub>9-12</sub>	-1	0	+1	dB
	V <sub>10-12</sub>	-1	0	+1	dB
	V <sub>5-14</sub>	-1	0	+1	dB
	V <sub>7-14</sub>	-1	0	+1	dB
Isolation (off state) (f = 20 kHz)		90	—	—	dB
Signal-to-noise ratio (note 4)	S/S + N	90	—	—	dB
Total harmonic distortion (note 6)	THD	—	—	0,1	%
Crosstalk attenuation for interferences caused by video signals (note 5)					
Weighted	$\alpha$	80	—	—	dB
Unweighted	$\alpha$	80	—	—	dB
Crosstalk attenuation for interferences caused by sinusoidal sound signals (note 5)					
	$\alpha$	80	—	—	dB
Crosstalk attenuation for interferences caused by the bus signal (weighted) (source impedance = 1 k $\Omega$ )					
		80	—	—	dB
Supply voltage rejection	RR	50	—	—	dB
Bandwidth (-1 dB)	B	50	—	—	kHz
<b>I<sup>2</sup>C bus inputs/outputs SDA (pin 17) and SCL (pin 18)</b>					
Input voltage HIGH	V <sub>IH</sub>	3	—	V <sub>P</sub>	V
Input voltage LOW	V <sub>IL</sub>	-0,3	—	+1,5	V
Input current HIGH*	I <sub>IH</sub>	—	—	10	$\mu$ A
Input current LOW*	I <sub>IL</sub>	—	—	10	$\mu$ A
Output voltage LOW at I <sub>OL</sub> = 3 mA	V <sub>OL</sub>	—	—	0,4	V
Maximum output sink current	I <sub>OL</sub>	—	5	—	mA
Capacitance of SDA and SDL inputs, pins 17 and 18	C <sub>I</sub>	—	—	10	pF
<b>Sub-address inputs S<sub>0</sub> (pin 11), S<sub>1</sub> (pin 13), S<sub>2</sub> (pin 6)</b>					
Input voltage HIGH	V <sub>IH</sub>	3	—	V <sub>P</sub>	V
Input voltage LOW	V <sub>IL</sub>	-0,3	—	+0,4	V
Input current HIGH	I <sub>IH</sub>	—	—	10	$\mu$ A
Input current LOW	I <sub>IL</sub>	-50	—	0	$\mu$ A
<b>OFF input (pin 2)</b>					
Input voltage HIGH	V <sub>IH</sub>	+3	—	V <sub>P</sub>	V
Input voltage LOW	V <sub>IL</sub>	-0,3	—	+0,4	V
Input current HIGH	I <sub>IH</sub>	—	—	20	$\mu$ A
Input current LOW	I <sub>IL</sub>	-10	—	2	$\mu$ A

\* Also if the supply is switched off.

**CHARACTERISTICS** (continued)

I<sup>2</sup>C bus load conditions are as follows:

4 kΩ pull-up resistor to +5 V; 200 pF to GND.

All values are referred to V<sub>IH</sub> = 3 V and V<sub>IL</sub> = 1,5 V.

parameter	symbol	min.	typ.	max.	unit
Bus free before start	t <sub>BUF</sub>	4	—	—	μs
Start condition set-up time	t <sub>s</sub> (STA)	4	—	—	μs
Start condition hold time	t <sub>h</sub> (STA)	4	—	—	μs
SCL, SDA LOW period	t <sub>LOW</sub>	4	—	—	μs
SCL, HIGH period	t <sub>HIGH</sub>	4	—	—	μs
SCL, SDA rise time	t <sub>r</sub>	—	—	1	μs
SCL, SDA fall time	t <sub>f</sub>	—	—	0,3	μs
Data set-up time (write)	t <sub>s</sub> (DAT)	1	—	—	μs
Data hold time (write)	t <sub>h</sub> (DAT)	1	—	—	μs
Acknowledge (from TDA8440) set-up time	t <sub>s</sub> (CAC)	—	—	2	μs
Acknowledge (from TDA8440) hold time	t <sub>h</sub> (CAC)	0	—	—	μs
Stop condition set-up time	t <sub>s</sub> (STO)	4	—	—	μs

**Notes to the characteristics**

1. Caused by drive on any other input at maximum level, measured in B = 5 MHz, source impedance for the used input 75 Ω,

$$\text{crosstalk} = 20 \log \frac{V_{\text{out}}}{V_{\text{IN max}}}$$

2. 
$$\text{S/N} = 20 \log \frac{V_{\text{O video noise (p-p) (2 V)}}}{V_{\text{O noise rms B = 5 MHz}}}$$

3. Supply voltage ripple rejection =  $20 \log \frac{V_{\text{r supply}}}{V_{\text{r on output}}}$  at f = max. 100 kHz.

4. 
$$\text{S/N} = 20 \log \frac{V_{\text{O nominal (0,5 V)}}}{V_{\text{O noise B = 20 kHz}}}$$

5. Caused by drive of any other input at maximum level, measured in B = 20 kHz, source impedance of the used input = 1 kΩ,

$$\text{crosstalk} = 20 \log \frac{V_{\text{out}}}{V_{\text{in max}}} \text{ according to DIN 45405 (CCIR 468).}$$

6. f = 20 Hz to 20 kHz.
7. All outputs are short-circuit proof (static).
8. The inputs and output (apart from SDA, SCL and OFF) withstand tests of MIL-STD-883 C. It is advisable to connected series resistors to these pins.
9. Timings t<sub>s</sub>, DAT and t<sub>h</sub>, DAT deviate from the I<sup>2</sup>C bus specification. After reset has been activated, transmission may only be started after a 50 μs delay.


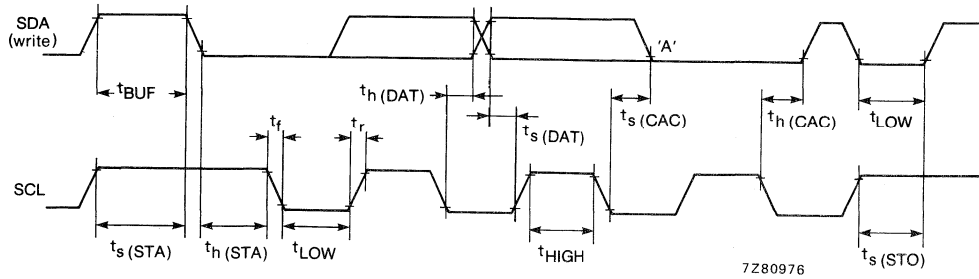


Fig. 2 Timing diagram I<sup>2</sup>C bus.

DEVELOPMENT DATA



Purchase of Philips' I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C system provided the system conforms to the I<sup>2</sup>C specifications defined by Philips.



## I<sup>2</sup>C BUS INTERFACE FOR COLOUR DECODERS

### GENERAL DESCRIPTION

The TDA8442 provides control of four analogue functions and has one high-current and two switching outputs. Control of the IC is performed via the two-line, bidirectional I<sup>2</sup>C bus.

### Features

- Four analogue control outputs
- One high-current output port (npn open emitter)
- Two switching output ports (npn collector with internal pull-up resistor)
- I<sup>2</sup>C bus slave receiver
- Power-down reset

### QUICK REFERENCE DATA

Supply voltage	$V_P = V_{9-8}$	typ.	12 V
Supply current (no outputs loaded)	$I_P = I_9$	typ.	13 mA
Total power dissipation (no outputs loaded)	$P_{tot}$	max.	1 W
Operating ambient temperature range	$T_{amb}$		-20 to +70 °C

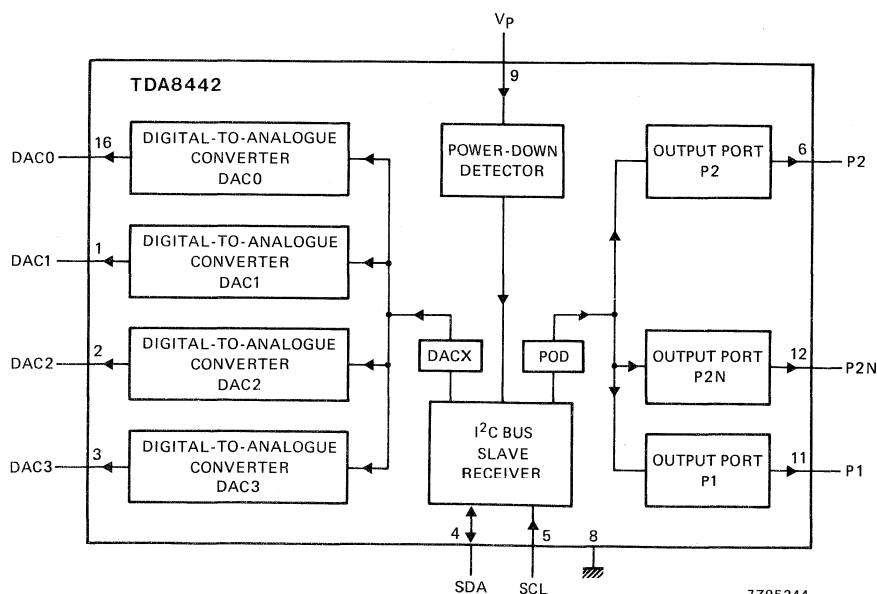


Fig. 1 Block diagram.

### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

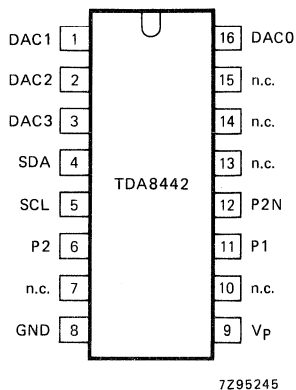


Fig. 2 Pinning diagram.

## PINNING

1	DAC1	analogue output 1	
2	DAC2	analogue output 2	
3	DAC3	analogue output 3	
4	SDA	serial data line	} I <sup>2</sup> C bus
5	SCL	serial clock line	
6	P2	port 2 npn collector output with internal pull-up resistor	
7	n.c.	not connected	
8	GND	supply return (ground)	
9	Vp	positive supply voltage	
10	n.c.	not connected	
11	P1	port 1 open npn emitter output	
12	P2N	inverted P2 output	
13	n.c.	not connected	
14	n.c.	not connected	
15	n.c.	not connected	
16	DAC0	analogue output 0	

## FUNCTIONAL DESCRIPTION

## Control

Analogue control is facilitated by four 6-bit digital-to-analogue converters (DAC0 to DAC3). The values of the output voltages from the DACs are set via the I<sup>2</sup>C bus.

The high-current output port (P1) is suitable for switching between internal and external RGB signals. It is an open npn emitter output capable of sourcing 14 mA (minimum).

The two output ports (P2 and P2N) can be used for NTSC/PAL switching. These are npn collector outputs with internal pull-up resistors of 10 k $\Omega$  (typical). Both outputs are capable of sinking up to 2 mA with a voltage drop of less than 400 mV. If one output is switched on (LOW), the other output is switched off, and vice versa.

## Reset

The power-down-reset mode occurs whenever the positive supply voltage falls below 8,5 V (typical) and resets all registers to a defined state.



## OPERATION

## Write

The TDA8442 is controlled via the I<sup>2</sup>C bus (specifications for the I<sup>2</sup>C bus will be supplied on request). Programming of the TDA8442 is performed using the format shown in Fig. 3.


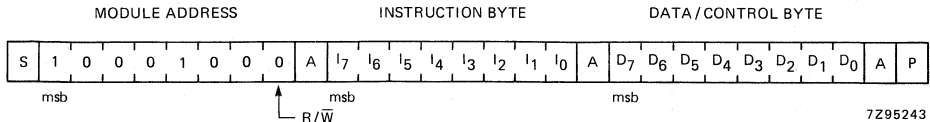


Fig. 3 TDA8442 programming format.

Acknowledge (A) is generated by the TDA8442 only when a valid address is received and the device is not in the power-down-reset mode ( $V_p > 8,5 \text{ V}$  (typ)).

## Control

Control is implemented by the instruction bytes POD (port output data) and DACX (digital-to-analogue convertor control) together with the corresponding data/control bytes (see Fig. 4).

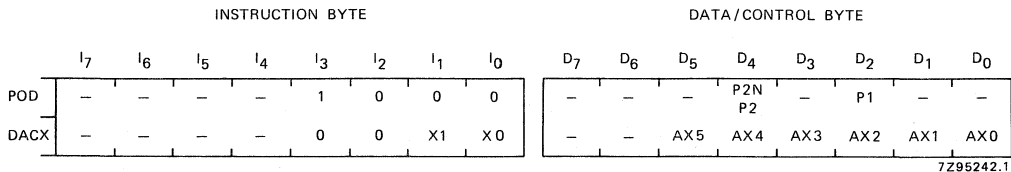

- = don't care

Fig. 4 Control programming.

**POD bit P1.** If a '1' is programmed, the P1 output is switched on. If a '0' is programmed or after a power-down-reset, the P1 output is switched off (high-impedance state).

**POD bit P2/P2N.** If a '1' is programmed, the P2 output is switched off and the P2N output is switched on (LOW). If a '0' is programmed, or after a power-down-reset, the P2 output is switched on (LOW) and the P2N output is switched off.

**DAX bits AX5 to AX0.** The digital-to-analogue convertor selected corresponds to the decimal equivalent of the two bits X1 and X0. The output voltage of the selected DAC is programmed using bits AX5 to AX0, the lowest value being with all data AX5 to AX0 at '0' or when power-down-reset has been activated.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range (pin 9)	$V_P$	-0,3 to +13,2 V
Input/output voltage ranges (pin 4)	$V_{SDA}$	-0,3 to +13,2 V
(pin 5)	$V_{SCL}$	-0,3 to +13,2 V
(pin 6)	$V_{P2}$	-0,3 to $V_P^*$ V
(pin 12)	$V_{P2N}$	-0,3 to $V_P^*$ V
(pin 11)	$V_{P1}$	-0,3 to $V_P^*$ V
(pins 1 to 3 and pin 16)	$V_{DAX}$	-0,3 to $V_P^*$ V
Total power dissipation	$P_{tot}$	max. 1 W
Operating ambient temperature range	$T_{amb}$	-20 to +70 °C
Storage temperature range	$T_{stg}$	-55 to +125 °C

**CHARACTERISTICS** $T_{amb} = +25$  °C;  $V_P = 12$  V; unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supplies</b>					
Supply voltage (pin 9)	$V_P$	10,8	12,0	13,2	V
Supply currents (no outputs loaded) (pin 9)	$I_P$	6,5	13	20	mA
<b>I<sup>2</sup>C bus inputs SDA (pin 4) and SCL (pin 5)</b>					
Input voltage HIGH (note 1)	$V_{IH}$	3,0	—	$V_P - 1$	V
Input voltage LOW	$V_{IL}$	-0,3	—	1,5	V
Input current HIGH (note 1)	$I_{IH}$	—	—	10	$\mu$ A
Input current LOW (note 1)	$I_{IL}$	—	—	10	$\mu$ A
<b>I<sup>2</sup>C bus output SDA (pin 4) (open collector)</b>					
Output voltage LOW at $I_{OL} = 3,0$ mA	$V_{OL}$	—	—	0,4	V
Maximum output sink current	$I_{OL}$	3	5	—	mA

\* Pin voltage may exceed  $V_P$  if the current in that pin is limited to 10 mA.

parameter	symbol	min.	typ.	max.	unit
<b>Ports P2 and P2N (pins 6 and 12)</b> (npn collector output with pull-up resistor to V <sub>p</sub> )					
Internal pull-up resistor to V <sub>p</sub>	R <sub>O</sub>	5	10	15	kΩ
Output voltage switched on (LOW) at I <sub>OL</sub> = 2 mA	V <sub>OL</sub>	—	—	0,4	V
Maximum output sink current	I <sub>OL</sub>	2	5	—	mA
Leakage current output switched off	-I <sub>leak</sub>	—	—	25	μA
<b>Port P1 (pin 11)</b> (open npn emitter output)					
Output current switched on V <sub>O</sub> = 0 to 5 V	I <sub>O</sub>	14	—	—	mA
Leakage current switched off V <sub>O</sub> = 0 to V <sub>p</sub> V	± I <sub>leak</sub>	—	—	100	μA
<b>Digital-to-analogue outputs (note 2)</b>					
<b>Output DAC0 (pin 16)</b>					
Maximum output voltage (unloaded) (note 3)	V <sub>Omax</sub>	3,0	—	—	V
Minimum output voltage (unloaded) (note 3)	V <sub>Omin</sub>	—	—	1,0	V
Positive value of smallest step at I <sub>O</sub> = 2 mA (1 lsb) (note 3)	V <sub>Olsb</sub>	24	—	100	mV
Deviation from linearity at I <sub>O</sub> = 2 mA	ΔV	—	—	150	mV
Output impedance at I <sub>O</sub> = -2 to + 2 mA	Z <sub>O</sub>	—	—	70	Ω
Maximum output source current	-I <sub>OH</sub>	2	—	6,0	mA
Maximum output sink current	I <sub>OL</sub>	2	8	—	mA
<b>Output DAC1 (pin 1)</b>					
Maximum output voltage (unloaded) (note 3)	V <sub>Omax</sub>	4,0	—	—	V
Minimum output voltage (unloaded) (note 3)	V <sub>Omin</sub>	—	—	1,7	V
Positive value of smallest step at I <sub>O</sub> = 2 mA (1 lsb) (note 3)	V <sub>Olsb</sub>	27	—	120	mV
Deviation from linearity at I <sub>O</sub> = 2 mA		—	—	170	mV
Output impedance at I <sub>O</sub> = -2 to + 2 mA	Z <sub>O</sub>	—	—	70	Ω
Maximum output source current	-I <sub>OH</sub>	2	—	6,0	mA
Maximum output sink current	I <sub>OL</sub>	2	8	—	mA

## CHARACTERISTICS (continued)

parameter	symbol	min.	typ.	max.	unit
<b>Output DAC2 (pin 2)</b>					
Maximum output voltage (unloaded) (note 3)	$V_{Omax}$	4,0	—	—	V
Minimum output voltage (unloaded) (note 3)	$V_{Omin}$	—	—	1,7	V
Positive value of smallest step at $I_O = 2$ mA (1 lsb) (note 3)	$V_{Olsb}$	27	—	120	mV
Deviation from linearity at $I_O = 2$ mA		—	—	170	mV
Output impedance at $I_O = -2$ to $+2$ mA	$Z_O$	—	—	70	$\Omega$
Maximum output source current	$-I_{OH}$	2	—	6,0	mA
Maximum output sink current	$I_{OL}$	2	8	—	mA
<b>Output DAC3 (pin 3)</b>					
Maximum output voltage (unloaded) (note 3)	$V_{Omax}$	10,0	—	—	V
Minimum output voltage (unloaded) (note 3)	$V_{Omin}$	—	—	1,0	V
Positive value of smallest step at $I_O = 2$ mA (1 lsb) (note 3)	$V_{Olsb}$	107	—	350	mV
Deviation from linearity at $I_O = 2$ mA		—	—	0,50	V
Output impedance at $I_O = -2$ to $+2$ mA	$Z_O$	—	—	70	$\Omega$
Maximum output source current	$-I_{OH}$	2	—	6,0	mA
Maximum output sink current	$I_{OL}$	2	8	—	mA
<b>Power-down reset</b>					
Maximum value of $V_p$ at which power-down reset is active	$V_{PD}$	6	—	10	V
Rise time of $V_p$ during power-on ( $V_p$ rising from 0 V to $V_{PD}$ )	$t_r$	5	—	—	$\mu s$


## Notes to the characteristics

1. If  $V_p < 1$  V, the input current is limited to  $10 \mu A$  at input voltages up to 13,2 V.
2. Pure capacitive load should be avoided because of possible oscillations.
3. Values are proportional to  $V_p$ .

I<sup>2</sup>C BUS TIMING

Bus loading conditions: 4 k $\Omega$  pull-up resistor to +5 V; 200 pF capacitor to GND.  
All values are referred to  $V_{IH} = 3$  V and  $V_{IL} = 1,5$  V.

parameter	symbol	min.	typ.	max.	unit
Bus free before start	$t_{BUF}$	4,0	—	—	$\mu$ s
Start condition set-up time	$t_{SU,STA}$	4,0	—	—	$\mu$ s
Start condition hold time	$t_{HD,STA}$	4,0	—	—	$\mu$ s
LOW period SCL, SDA	$t_{LOW}$	4,0	—	—	$\mu$ s
HIGH period SCL	$t_{HIGH}$	4,0	—	—	$\mu$ s
Rise time SCL, SDA	$t_R$	—	—	1,0	$\mu$ s
Fall time SCL, SDA	$t_F$	—	—	0,30	$\mu$ s
Data set-up time (write)	$t_{SU,DAT}$	1	—	—	$\mu$ s
Data hold time (write)	$t_{HD,DAT}$	1	—	—	$\mu$ s
Acknowledge (from TDA8442) set-up time	$t_{SU,ACK}$	—	—	3,5	$\mu$ s
Acknowledge (from TDA8442) hold time	$t_{HD,ACK}$	0	—	—	$\mu$ s
Stop condition set-up time	$t_{SU,STO}$	4,0	—	—	$\mu$ s

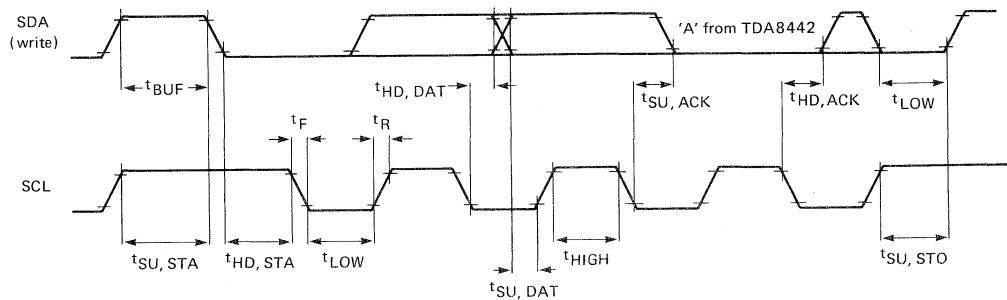

7295246

Reference levels are 10 and 90%

Fig. 5 I<sup>2</sup>C bus timing, TDA8442.



Purchase of Philips' I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C-system provided the system conforms to the I<sup>2</sup>C specifications defined by Philips.



## DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.



TDA8443  
TDA8443A

# I<sup>2</sup>C BUS CONTROLLED YUV/RGB INTERFACE CIRCUIT

## GENERAL DESCRIPTION

The TDA8443 and TDA8443A are intended for use in a colour television receiver equipped with a peritelevision connector, for switching and matrixing of external RGB and interval YUV signals. The ICs are controlled by an I<sup>2</sup>C bus, such as the MAB8400 family, with seven sub-addresses or they can be used in a non-I<sup>2</sup>C bus mode. In the non-I<sup>2</sup>C bus mode, control of the circuit is achieved by d.c. voltages. The difference between the two circuits is the output level (TDA8443A is designed for use with standard decoder levels and the TDA8443 is designed for use with computer controlled television levels).

## Features


- Two RGB/YUV selectable clamped inputs with associated synchronization
- RGB/YUV matrix
- Three state switching with an OFF-state
- Four amplifiers with selectable gain
- I<sup>2</sup>C bus or non-I<sup>2</sup>C bus mode
- Slave receiver in the I<sup>2</sup>C bus mode
- External OFF command
- Expansible system (upto seven devices)
- Fast switching to allow for mixed modes

## QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage	V <sub>18-22</sub>	V <sub>p</sub>	10,8	12,0	13,2	V
Supply current	I <sub>18</sub>	I <sub>p</sub>	—	65	90	mA
Operating ambient temperature range		T <sub>amb</sub>	0	—	+ 70	°C
Output impedance		Z <sub>19-22</sub>    Z <sub>20-22</sub>    Z <sub>21-22</sub>	—	7	30	Ω
3 dB bandwidth	mode 0 or 2		—	25	—	MHz
3 dB bandwidth	mode 1		—	10	—	MHz
Maximum output amplitude of YUV signal (peak-to-peak value)	gain x 1 gain x 2		2,1 4,2	— —	— —	V V

## PACKAGE OUTLINE

24-lead DIL; plastic (with internal heat spreader)(SOT-101B).

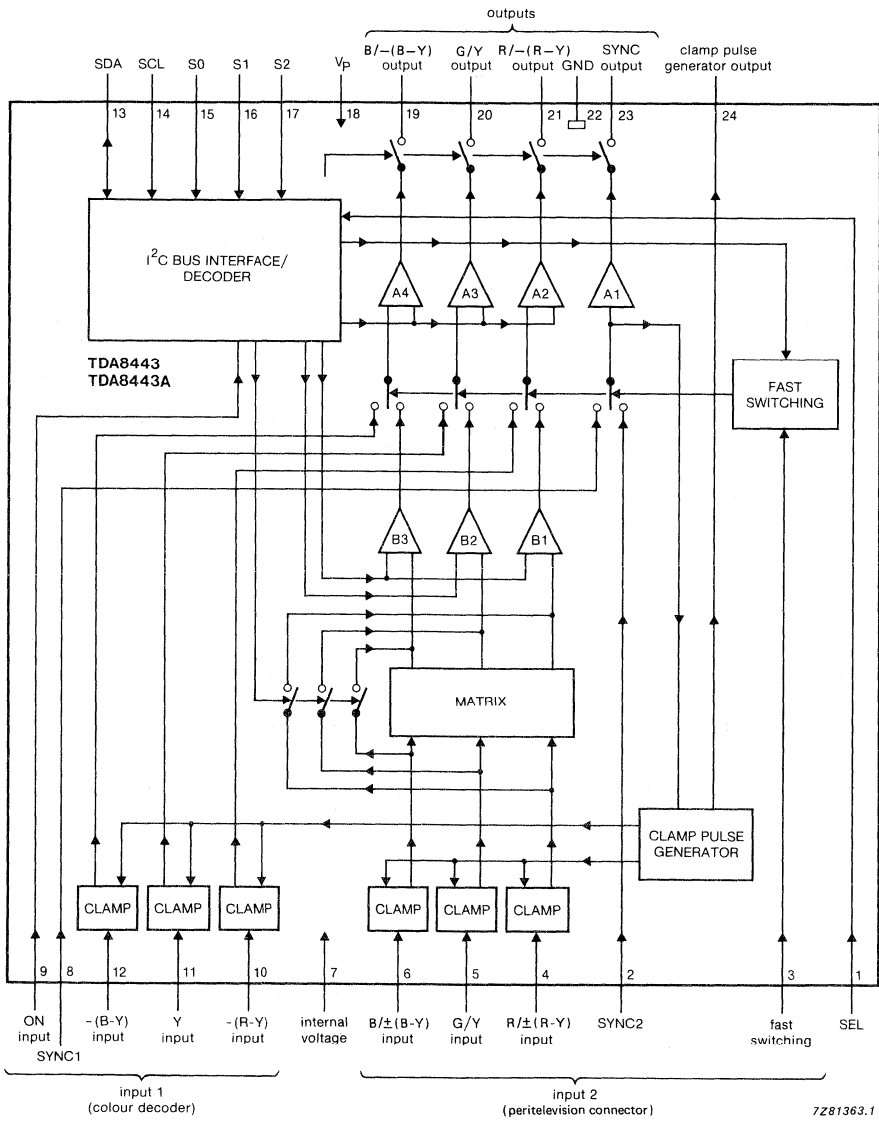

7281363.1

Fig. 1 Block diagram.



DEVELOPMENT DATA

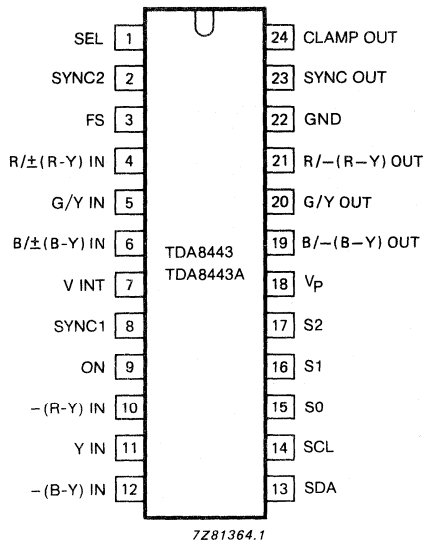


Fig. 2 Pinning diagram.

## PINNING

1	SEL	select (non-I <sup>2</sup> C bus mode only)
2	SYNC2	synchronization input from the periconnector
3	FS	fast switching
4	R/±(R-Y) IN	R or (R-Y) input
5	G/Y IN	G or Y input
6	B/±(B-Y) IN	B or (B-Y) input
7	V INT	internal voltage supply
8	SYNC1	synchronization input from a standard colour decoder
9	ON	ON input
10	-(R-Y) IN	-(R-Y) input signal
11	Y IN	Y input signal
12	-(B-Y) IN	-(B-Y) input signal
13	SDA	I <sup>2</sup> C bus data input/output
14	SCL	I <sup>2</sup> C bus clock input/output
15	S0	I <sup>2</sup> C bus subaddress inputs
16	S1	
17	S2	
18	V <sub>p</sub>	positive supply voltage
19	B/-(B-Y) OUT	B or -(B-Y) output signal
20	G/Y OUT	G or Y output signal
21	R/-(R-Y) OUT	R or -(R-Y) output signal
22	GND	ground
23	SYNC OUT	synchronization output
24	CLAMP OUT	clamping pulse generator output

## FUNCTIONAL DESCRIPTION

Each circuit contains two sets of inputs (see Fig. 1): input 1 receives colour difference signals from a colour decoder and input 2 receives RGB/YUV signals via a peritelevision connector. Each set of inputs has its own synchronization input. The inputs are clamped by a clamping pulse, which is internally generated from the synchronization inputs.

In the RGB mode the signals are internally matrixed to form colour difference signals, before further processing is carried out by a control circuit (such as the TDA8461).

The outputs can be set in a high impedance OFF state, which allows the use of up to seven devices in parallel (I<sup>2</sup>C bus mode).

## Control

The circuits can be controlled by an I<sup>2</sup>C bus or directly by DC voltages. The fast switching input can be operated via pin 16 of the peritelevision connector. Inputs can also be changed by applying a signal, (e.g. a sandcastle pulse) to pin 24. The internal clamping pulse will occur during the time that the signal at pin 24 is between 5,5 and 6,5 V. If both a sync signal and a pin 24 signal are used the signal should be applied to pin 24 using a 1 kΩ dropping resistor.

**I<sup>2</sup>C bus mode**

The protocol for the devices in I<sup>2</sup>C bus mode is shown in Fig. 3.

STA : start condition

A6 : 1  
A5 : 1  
A4 : 0  
A3 : 1

} fixed address bits

A2 : subaddress bit set by S2

A1 : subaddress bit set by S1

A0 : subaddress bit set by S0

R/W : read/write bit (= 0 only write mode allowed)

AC : acknowledge, generated by the TDA8443/A

D7 : MOD1  
D6 : MOD0

} mode control bits, see Table 2


D5 : G2  
D4 : G1

} gain control bits, see Table 4

D3 : G0  
D2 : PRIOR, priority bit

D1 : ON/OFF bit

D0 : ON/OFF active bit



7Z81365

Fig. 3 I<sup>2</sup>C bus protocol.

Table 1 subaddressing

slave addressing bit			address select pins		
A2	A1	A3	S2	S1	S0
*	*	*	L	L	L
0	0	1	L	L	H
0	1	0	L	H	L
0	1	1	L	H	H
1	0	0	H	L	L
1	0	1	H	L	H
1	1	0	H	H	L
1	1	1	H	H	H

**Note**

L = input voltage LOW

H = input voltage HIGH

\* = non-I<sup>2</sup>C bus operation

Table 2

Mode control bits (note 1)

MOD 1 (bit)	MOD 0 (bit)	mode
0	0	0
0	1	1
1	0	2
1	1	3

Table 3

Priority/fast switching (note 1)

PRIOR (bit)	Fast switching pin	mode
0	X	0 to 2 (note 2)
1	0,4V	mode 2
1	1 to 3 V	0 or 1 (note 3)

## Notes to Tables 2 and 3

- In Mode 0, input 2 is directly selected  
1, input 2 is selected via RGB/YUV matrix  
2, input 1 is directly selected  
Mode 3 is reserved, do not use.
- Defined by mode control bits.
- Defined by mode control except mode 2 which reverts to mode 0.

Table 4 Gain setting (see Fig. 1)

G2 (bit)	G1 (bit)	G0 (bit)	A1	A2, A3, A4	B1, B3		B2
					TDA8443	TDA8443A	
0	0	0	1	1	-0,6	-1	0,45
0	0	1	1	1	1	1	1
0	1	0	reserved, do not use				
0	1	1	1	1	-0,6	-1	0,45
1	0	0	2	2	-0,6	-1	0,45
1	0	1	2	1	1	1	1
1	1	0	2	2	1	1	1
1	1	1	2	1	-0,6	-1	0,45

DEVELOPMENT DATA

## Matrix equations

The relationship between output and input signals of the matrix is as follows:

$$Y = 0,3 R + 0,59 G + 0,11 B$$

$$R - Y = 0,7 R - 0,59 G - 0,11 B$$

$$B - Y = -0,3 R - 0,59 G + 0,89 B$$

Table 5 ON bit

ON	function
0	OFF, no output signal, high impedance OFF state
1	ON, normal function

**Table 6** OFF active – ON (pin 9)

OFF active (bit)	ON (bit)	function
0	L	OFF
0	H	according to protocol, last defined D7 to D1 (maybe entered when ON=L)
1	X	according to protocol, last defined D7 to D1

**Power-on reset**

If the circuits are switched on in the I<sup>2</sup>C bus mode, all bits of D0 to D7 are set to zero.

**Timing specifications**

I<sup>2</sup>C bus load conditions are as follows:


4 k $\Omega$  pull-up resistor to + 5 V; 200 pF capacitor to GND.

All values are referred to V<sub>IH</sub> = 3 V and V<sub>IL</sub> = 1,5 V.

parameter	symbol	min.	max.	unit
Bus free before start	t <sub>BUF</sub>	4,0	–	$\mu$ s
Start condition set-up time	t <sub>SU; STA</sub>	4,0	–	$\mu$ s
Start condition hold time	t <sub>HD; STA</sub>	4,0	–	$\mu$ s
SCL and SDA LOW period	t <sub>LOW</sub>	4,0	–	$\mu$ s
SCL HIGH period	t <sub>HIGH</sub>	4,0	–	$\mu$ s
SCL and SDA rise time	t <sub>R</sub>	–	1,0	$\mu$ s
SCL and SDA fall time	t <sub>F</sub>	–	0,3	$\mu$ s
Data set-up time (write)	t <sub>SU; DAT</sub>	0,25	–	$\mu$ s
Data hold time (write)	t <sub>HD; DAT</sub>	1,0	–	$\mu$ s
Acknowledge (from TDA8443) set-up time	t <sub>SU, CAC</sub>	–	2	$\mu$ s
Acknowledge (from TDA8443) hold time	t <sub>HD, CAC</sub>	0	–	$\mu$ s

**Note**

Timing t<sub>HD, DAT</sub> deviates from the I<sup>2</sup>C bus specification. After reset has been activated, a delay of 50  $\mu$ s must occur before transmission may be resumed.

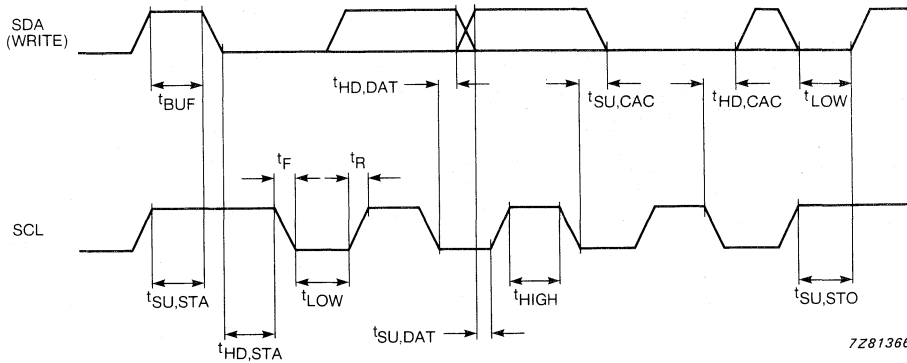

7281366

Fig. 4 I<sup>2</sup>C bus timing diagram.

Non-I<sup>2</sup>C bus mode

Table 7 non-I<sup>2</sup>C bus mode (S2 = S1 = S0 = L)

DEVELOPMENT DATA

control			mode switched by FS	gain settings		B1, B3		B2
SDA	SCL	SEL		A1	A4, A3, A2	TDA8443	TDA8443A	
L	L	L	2/0	1	1	1	1	1
L	L	H	2/0	1	2	1	1	1
L	H	L	2/1	1	1	-0,6	-1	0,45
L	H	H	2/0	1	1	-0,6	-1	0,45
H	L	L	2/0	2	1	1	1	1
H	L	H	2/0	2	2	1	1	1
H	H	L	2/1	2	1	-0,6	-1	0,45
H	H	H	2/0	2	1	-0,6	-1	0,45

Table 8 fast switching input (pin 3)

FS	mode selected
≤ 0,4 V	mode 2
1 – 3 V	mode 0 or mode 1 as set by control

Table 9 ON input (pin 9)

ON	function
L	OFF, no output signal, high impedance OFF state
H	function is determined in table 7

### RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage	V <sub>18-22</sub>	V <sub>P</sub>	—	14	V
Input voltage range	pin 13	V <sub>SDA</sub>	-0,3	14	V
	pin 14	V <sub>SCL</sub>	-0,3	14	V
	other pins		-0,3	V <sub>P</sub> + 0,3	V
Maximum output current		I <sub>O</sub>	—	20	mA
Storage temperature range		T <sub>stg</sub>	-55	+ 125	°C
Operating ambient temperature range		T <sub>amb</sub>	0	+ 70	°C
Maximum junction temperature			—	+ 125	°C

### CHARACTERISTICS

V<sub>P</sub> = 12 V; T<sub>amb</sub> = 25 °C; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Supply</b>						
Supply voltage	V <sub>18-22</sub>	V <sub>P</sub>	10,8	12,0	13,2	V
Supply current	I <sub>18</sub>	I <sub>P</sub>	—	65	90	mA
<b>RGB/YUV channels</b>						
Absolute gain difference	programmed value		—	0	10	%
Relative gain difference	between Y output and the (R-Y) and (B-Y) channel inputs		—	0	10	%
Relative gain difference	between any 2 other channels		—	0	5	%
Input current		I <sub>I</sub>	—	0,5	1,0	μA
Output impedance		Z <sub>19-22</sub>    Z <sub>20-22</sub>    Z <sub>21-22</sub>	—	7	30	Ω
Bandwidth	-3 dB, mode 0 or mode 2		—	25	—	MHz
	+ 3 dB, mode 0 or mode 2		—	12	—	MHz
Bandwidth	3 dB, mode 1		—	10	—	MHz
Mutual time difference at output	If all inputs of one source are connected together		—	—	25	ns

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Maximum output amplitude of YUV signals (peak-to-peak value)	gain x 1	$V_{pp}$	2,1	—	—	V
	gain x 2	$V_{pp}$	4,2	—	—	V
Crosstalk between inputs of same source	note 1 f = 5 MHz		—	—	-30	dB
Crosstalk between different sources			—	—	-40	dB
Isolation (OFF state)	f = 10 MHz		50	—	—	dB
Differential gain at nominal output signals (peak-to-peak value):	R-Y = 1,05 $V_{pp}$		—	—	10	%
	B-Y = 1,33 $V_{pp}$		—	—	10	%
	Y = 0,34 $V_{pp}$		—	—	10	%
Signal to noise ratio	note 2 B = 5 MHz nominal input	S/N	50	—	—	dB
Supply voltage rejection	note 3	$SV_{RR}$	30	—	—	dB
D.C. output levels	during clamping		—	5,3	—	V
<b>Synchronization channels</b>						
Gain difference	programmed value		—	—	10	%
Bandwidth	3 dB		—	50	—	MHz
	+ 3 dB gain x 1		—	20	—	MHz
	+ 3 dB gain x 2		—	13	—	MHz
Input amplitude of sync. signal (peak-to-peak value)	for correct operation of clamp pulse generator	$V_{pp}$	0,2	—	2,5	V
Output impedance		$ Z_{23-22} $	—	20	30	$\Omega$
Maximum output amplitude (peak-to-peak value)	pin 23 undistorted	$V_{pp}$	2,5	—	—	V
DC level on top of sync pulse	output		1,5	1,9	2,4	V
<b>I<sup>2</sup>C bus inputs/outputs</b>						
	SDA and SCL pins 13 and 14 respectively					
Input voltage	HIGH	$V_{IH}$	3	—	$V_P$	V
Input voltage	LOW	$V_{IL}$	-0,3	—	1,5	V
Input current	HIGH	$I_{IH}$	—	—	10	$\mu A$
Input current	LOW	$I_{IL}$	—	—	10	$\mu A$

CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>SDA output</b>	open collector					
Output voltage LOW	output current = 3 mA (LOW)	$V_{OL}$	—	—	0,4	V
Maximum output current LOW	sink current	$I_{OL}$	—	5	—	mA
<b>Subaddresses inputs</b>	S0, S1, S2 pins 15, 16, 17 respectively					
Input voltage HIGH		$V_{IH}$	3	—	$V_p$	V
Input voltage LOW		$V_{IL}$	-0,3	—	0,4	V
Input current HIGH		$I_{IH}$	—	0	10	$\mu A$
Input current LOW		$I_{IL}$	-50	-10	0	$\mu A$
<b>Fast switching pin</b>						
Input voltage HIGH	V3-22	$V_{IH}$	1	—	3	V
Input voltage LOW	V3-22	$V_{IL}$	-0,3	—	0,4	V
Input current HIGH	I3	$I_{IH}$	—	—	500	$\mu A$
Input current LOW	I3	$I_{IL}$	-100	—	—	$\mu A$
Switching delay	Fig. 5		—	20	—	ns
Switching time	Fig. 5		—	10	—	ns
<b>Select pin</b>	pin 1					
Input voltage HIGH	V1-22	$V_{IH}$	3	—	$V_p$	V
Input voltage LOW	V1-22	$V_{IL}$	-0,3	—	0,4	V
Input current HIGH	I1	$I_{IH}$	—	0	10	$\mu A$
Input current LOW	I1	$I_{IL}$	-50	-10	0	$\mu A$
<b>ON pin</b>						
Input voltage HIGH	V9-22	$V_{IH}$	3	—	$V_p$	V
Input voltage LOW	V9-22	$V_{IL}$	-0,3	—	1,5	V
Input current HIGH	I9	$I_{IH}$	—	—	10	$\mu A$
Input current LOW	I9	$I_{IL}$	—	—	10	$\mu A$



**Notes to the characteristics**

1. Crosstalk is defined as the unwanted data transfer from an output, driven at nominal level, to other inputs and outputs on the device and is expressed as a ratio in dBs.

$$2. S/N = 20 \log \frac{V_{O(p-p)}}{V_{O \text{ noise (rms) } B = 5 \text{ MHz}}}$$

$$3. \text{Supply voltage rejection} = 20 \log \frac{V_r \text{ supply}}{V_r \text{ on the output}}$$

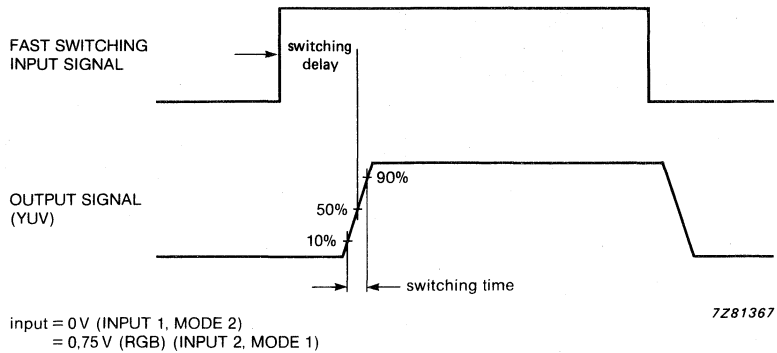


Fig. 5 Fast switching signal diagram.

APPLICATION INFORMATION

Table 10 application information (TDA8443A)

input 1	input 2	output	mode	G2	G1	G0
Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,3 V	R = 0,75 V G = 0,75 V B = 0,75 V S = 0,3 V	Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,6 V	2  1	1  1	1  1	1  1
Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,3 V	R = 0,75 V G = 0,75 V B = 0,75 V S = 0,3 V	Y = 0,68 V U = -2,66 V V = -2,10 V S = 0,6 V	2  1	1  1	0  0	0  0
Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,3 V	Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,3 V	Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,6 V	2  0	1  1	0  0	1  1
Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,3 V	Y = 0,34 V U = -1,33 V V = -1,05 V S = 0,3 V	Y = 0,68 V U = -2,66 V V = -2,10 V S = 0,6 V	2  0	1  1	1  1	0  0

DEVELOPMENT DATA


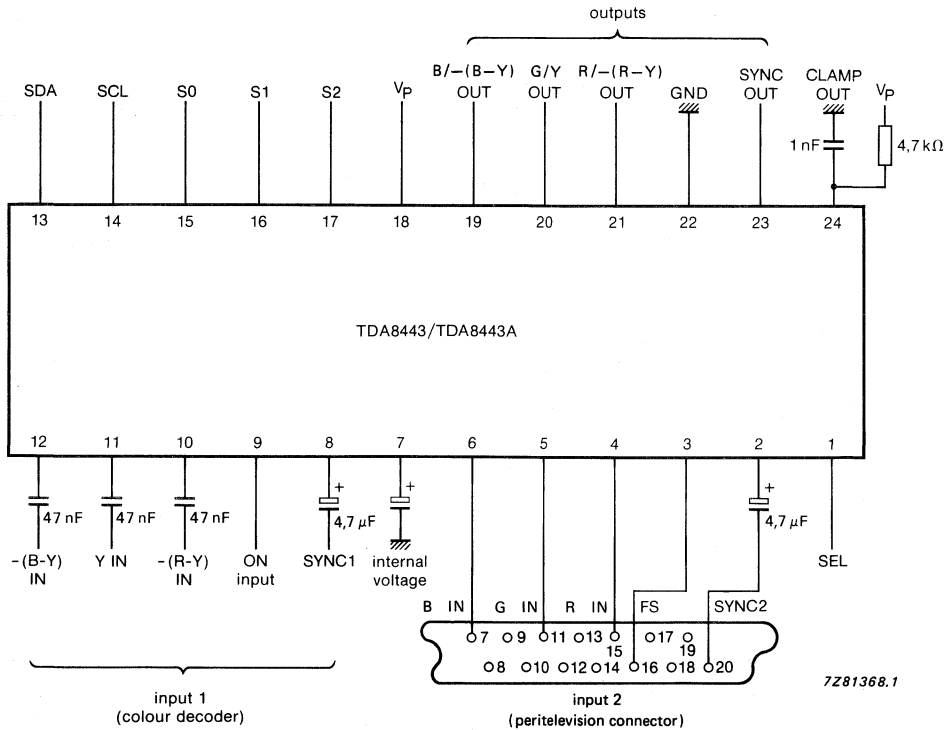


Fig. 6 Application diagram (example).



Purchase of Philips' I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C-system provided the system conforms to the I<sup>2</sup>C specifications defined by Philips.



OCTUPLE 6-BIT DAC WITH I<sup>2</sup>C BUS

## GENERAL DESCRIPTION

The TDA8444 comprises eight digital-to-analogue converters (DACs) each controlled via the two-wire I<sup>2</sup>C bus. The DACs are individually programmed using a 6-bit word to select an output from one of 64 voltage steps. The maximum output voltage of all DACs is set by the input  $V_{\max}$  and the resolution is approximately  $V_{\max}/64$ . At power-on all DAC outputs are set to their lowest value. The I<sup>2</sup>C bus slave receiver has a 7-bit address of which 3 bits are programmable via pins A0, A1 and A2.

## Features

- Eight discrete DACs
- I<sup>2</sup>C bus slave receiver
- 16-pin DIL package

## QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage	pin 1	$V_p$	10,8	12,0	13,2	V
Supply current	no loads; $V_{\max} = V_p$ ; all data = 00	$I_{CC}$	8	11	15	mA
Total power dissipation	no loads; $V_{\max} = V_p$ ; all data = 00	$P_{tot}$	—	130	—	mW
Effective range of $V_{\max}$ input	$V_p = 12$ V	$V_{\max}$	1	—	10,5	V
DAC output voltage range	pins 9,10,11,12,13,14, 15 or 16	$V_O$	0,1	—	$V_p - 0,5$	V
Step value of 1 LSB	$V_{\max} = V_p$	$V_{LSB}$	100	160	250	mV

## PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).


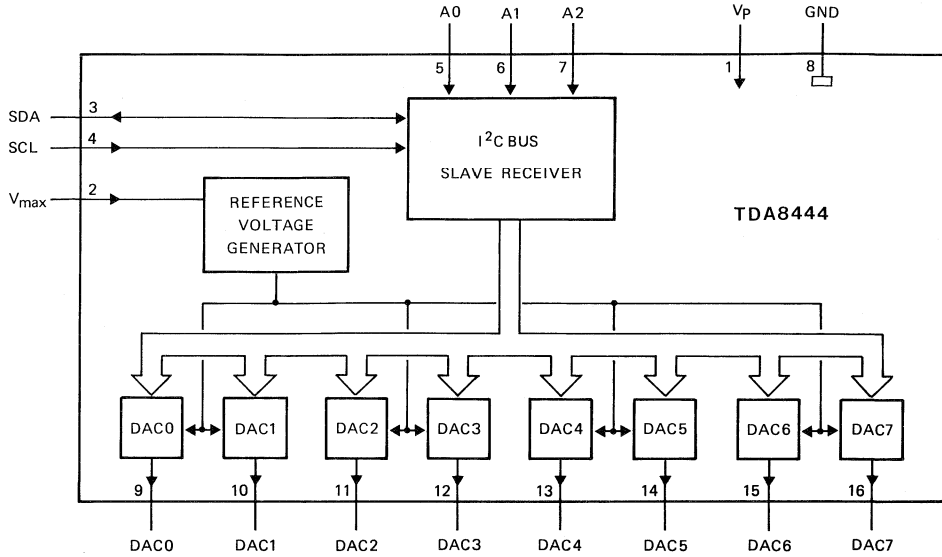


Fig. 1 Block diagram.

7Z94743

**PINNING**

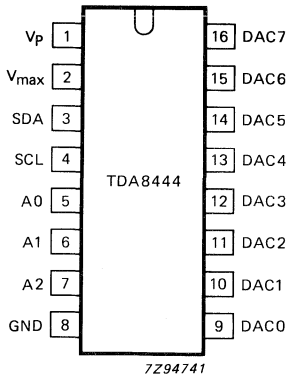

7Z94741


- |      |                  |   |
|------|------------------|---|
| 1    | V <sub>p</sub>   | positive supply voltage   |
| 2    | V <sub>max</sub> | control input for DAC maximum output voltage                      |
| 3    | SDA              | I <sup>2</sup> C bus serial data input/output                     |
| 4    | SCL              | I <sup>2</sup> C bus serial data clock                            |
| 5    | A0               | programmable address bits for I <sup>2</sup> C bus slave receiver |
| 6    | A1               |   |
| 7    | A2               |   |
| 8    | GND              | ground  |
| 9-16 | DAC0-7           | analogue voltage outputs  |

Fig. 2 Pinning diagram.

## FUNCTIONAL DESCRIPTION

I<sup>2</sup>C bus

The TDA8444 I<sup>2</sup>C bus interface is a receive-only slave. Data is accepted from the I<sup>2</sup>C bus in the following format:



Where:

S = start condition	A2, A1, A0	= programmable address bits
P = stop condition	I3, I2, I1, I0	= instruction bits
A = acknowledge	SD, SC, SB, SA	= subaddress bits
X = don't care	D5, D4, D3, D2, D1, D0	= data bits

Fig. 3 Data format.

DEVELOPMENT DATA

## Address byte

Valid addresses are 40, 42, 44, 46, 48, 4A, 4C, 4E (hexadec), depending on the programming of bits A2, A1 and A0. With these addresses, up to eight TDA8444 ICs can be operated independently from one I<sup>2</sup>C bus. No other addresses are acknowledged by the TDA8444.

## Instruction and data bytes

Valid instructions are 00 to 0F and F0 to FF (hexadec); the TDA8444 will not respond to other instruction values.

Instructions 00 to 0F cause auto-incrementing of the subaddress (bits SD to SA) when more than one data byte is sent within one transmission. With auto-incrementing, the first data byte is written into the DAC addressed by bits SD to SA and then the subaddress is automatically incremented by one position for the next data byte in the series.

Auto-incrementation does not occur with instructions F0 to FF. Other than auto-incrementation there is no difference between instructions 00 to 0F and F0 to FF. When only one data byte per transmission is present, the DAC addressed by the subaddress will always receive the data.

Valid subaddresses (bits SD to SA) are 0 to 7 (hexadec) relating numerically to DAC0 to DAC7. When the auto-incrementing function is used, the subaddress will sequence through all possible values (0 to F, 0 to F, etc.).

I<sup>2</sup>C bus

Input SCL (pin 3) and input/output SDA (pin 4) conform to I<sup>2</sup>C bus specifications.\* Pins 3 and 4 are protected against positive voltage pulses by internal zener diodes connected to the ground plane and therefore the normal bus line voltage should not exceed 5,5 V.

The address inputs A0, A1, A2 are programmed by a connection to GND for An = 0 or to Vp for An = 1. If the inputs are left floating, An = 1 will result.

\* I<sup>2</sup>C bus specifications can be supplied on request.

**FUNCTIONAL DESCRIPTION** (continued)**Input  $V_{\max}$** 

Input  $V_{\max}$  (pin 2) provides a means of compressing the output voltage swing of the DACs. The maximum DAC output voltage is restricted to approximately  $V_{\max}$  while the 6-bit resolution is maintained, so giving a finer voltage resolution of smaller output swings.

**Digital-to-analogue converters**

Each DAC comprises a 6-bit data latch, current switches and an output driver. Current sources with values weighted by  $2^0$  up to  $2^5$  are switched according to the data input so that the sum of the selected currents gives the required analogue voltage from the output driver. The range of the output voltage is approximately 0,5 to 10,5 V when  $V_{\max} = V_p$ .

The DAC outputs are protected against short-circuits to  $V_p$  and GND.

To avoid the possibility of oscillations, capacitive loading at the DAC outputs should not exceed 2 nF.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage	pin 1	$V_p = V_{1.8}$	0,5	18	V
Supply current	source current	$-I_p = -I_1$	—	10	mA
		$I_p = I_1$	—	25	mA
I <sup>2</sup> C bus line voltage	pins 3 and 4	$V_{3, 4.8}$	-0,5	5,9	V
Input voltage	pins 2 and 5 to 7	$V_I$	-0,5	$V_p+0,5$	V
Output voltage	pins 9 to 16	$V_O$	-0,5	$V_p+0,5$	V
Maximum current on any pin	pins 2 to 7, and 9 to 16	$\pm I_{\max}$	—	10	mA
Total power dissipation		$P_{\text{tot}}$	—	500	mW
Operating ambient temperature range		$T_{\text{amb}}$	-20	+70	°C
Storage temperature range		$T_{\text{stg}}$	-55	+125	°C

**THERMAL RESISTANCE**

From junction to ambient

$R_{\text{th j-a}}$  75 K/W



## CHARACTERISTICS

All voltages are with respect to GND; T<sub>amb</sub> = 25 °C

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage	pin 1	V <sub>P</sub> = V <sub>1-8</sub>	10,8	12,0	13,2	V
Voltage level for power-on reset	pin 1	V <sub>1</sub>	1	—	4,6	V
Supply current	no loads; V <sub>max</sub> = V <sub>P</sub> ; all data = 00	I <sub>P</sub> = I <sub>1</sub>	8	11	15	mA
Total power dissipation	no loads; V <sub>max</sub> = V <sub>P</sub> ; all data = 00	P <sub>tot</sub>	—	130	—	mW
Effective range of V <sub>max</sub> input	pin 2; V <sub>P</sub> = 12 V	V <sub>max</sub> = V <sub>2</sub>	1,0	—	10,5	V
Pin 2 current		-I <sub>2</sub>	—	—	10	μA
<b>SDA, SCL inputs</b>						
Input voltage range	pins 3 and 4	V <sub>I</sub>	0	—	5,5	V
Input voltage LOW	pins 3 and 4	V <sub>IL</sub>	—	—	1,5	V
Input voltage HIGH	pins 3 and 4	V <sub>IH</sub>	3,0	—	—	V
Input current LOW	pins 3 and 4	I <sub>IL</sub>	—	—	10	μA
Input current HIGH	pins 3 and 4	I <sub>IH</sub>	—	—	10	μA
<b>SDA output</b>						
Output voltage LOW	pin 3; I <sub>3</sub> = 3 mA	V <sub>OL</sub>	—	—	0,4	V
Sink current	pin 3	I <sub>O</sub>	3	5	—	mA
<b>Address inputs</b>						
Input voltage range	pins 5, 6 and 7	V <sub>I</sub>	0	—	V <sub>P</sub>	V
Input voltage LOW	pins 5, 6 and 7	V <sub>IL</sub>	—	—	1,4	V
Input voltage HIGH	pins 5, 6 and 7	V <sub>IH</sub>	2,1	—	—	V
Input current LOW	pins 5, 6 and 7	-I <sub>IL</sub>	—	5	10	μA
Input current HIGH	pins 5, 6 and 7	I <sub>IH</sub>	—	—	1	μA

DEVELOPMENT DATA

CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>DAC outputs</b>						
Output voltage range	pins 9 to 16	$V_O$	0,1	—	$V_P - 0,5$	V
Minimum output voltage	pins 9 to 16 data = 00; $I_O = 0$ mA	$V_{Omin}$	0,1	0,4	0,8	V
Maximum output voltage	pins 9 to 16 data = 3F; $I_O = 0$ mA	$V_{Omax}$	10	10,5	11,5	V
		$V_{Omax}$		see note		V
Output sink current	pins 9 to 16	$I_O$	2	8	15	mA
Output source current	pins 9 to 16	$-I_O$	2	—	6	mA
Output impedance	pins 9 to 16 $-2 \leq I_O \leq +2$ mA	$Z_O$	—	2	70	$\Omega$
Step value of 1 LSB	$V_{max} = V_P$	$V_{LSB}$	100	160	250	mV
Deviation from linearity			0	—	50	mV

Note.

$$V_{Omax} = 0,95 V_{max} + V_{Omin} + 0,5 V$$

APPLICATION INFORMATION


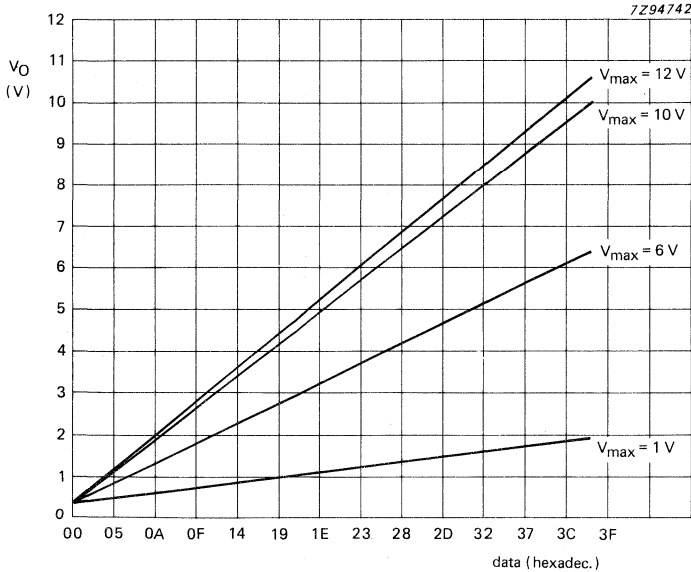


Fig. 4 Graph showing output voltage as a function of the input data value for  $V_{max}$  values of 1, 6, 10 and 12 V;  $V_P = 12$  V.



Purchase of Philips I<sup>2</sup>C components conveys a license under the Philips I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C-system provided the system conforms to the I<sup>2</sup>C specifications defined by Philips.

# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

TDA9045

## VIDEO PROCESSOR AND INPUT SELECTOR

### GENERAL DESCRIPTION

The TDA9045 is a monolithic integrated circuit for video signal processing and input selection.

### FEATURES

- Selection stage for three different inputs
- 4 dB amplifier
- Constant output signal amplifier controlled by synchronizing level and peak white level
- Clamping stage for a constant black level
- Circuit for stopping clamping pulses during the sync pulses
- Emitter follower output stage

### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage range		Vp	—	12	—	V
Supply current		Ip	—	60	—	mA
<b>Pre-amplifier</b>						
Composite colour video input signals (peak-to-peak value)		V2, 3, 4-11(p-p)	—	—	2	V
<b>AGC amplifier</b>						
Composite video signal (peak-to-peak value)	±6 dB	V12-11(p-p)	—	0,4	—	V
<b>Sync level detector</b>						
Threshold voltage for sync level control		V9-11	—	1,8	—	V
<b>Selection</b>						
active input pin 2		V1-11	—	5	—	V
		V15-11	—	5	—	V
active input pin 3		V1-11	0	—	—	V
		V15-11	—	5	—	V
active input pin 4		V1-11	0	—	—	V
		V15-11	0	—	—	V
Not allowed condition		V1-11	—	5	—	V
		V15-11	—	0	—	V

### PACKAGE OUTLINE

18-lead DIL; plastic (SOT-102H).

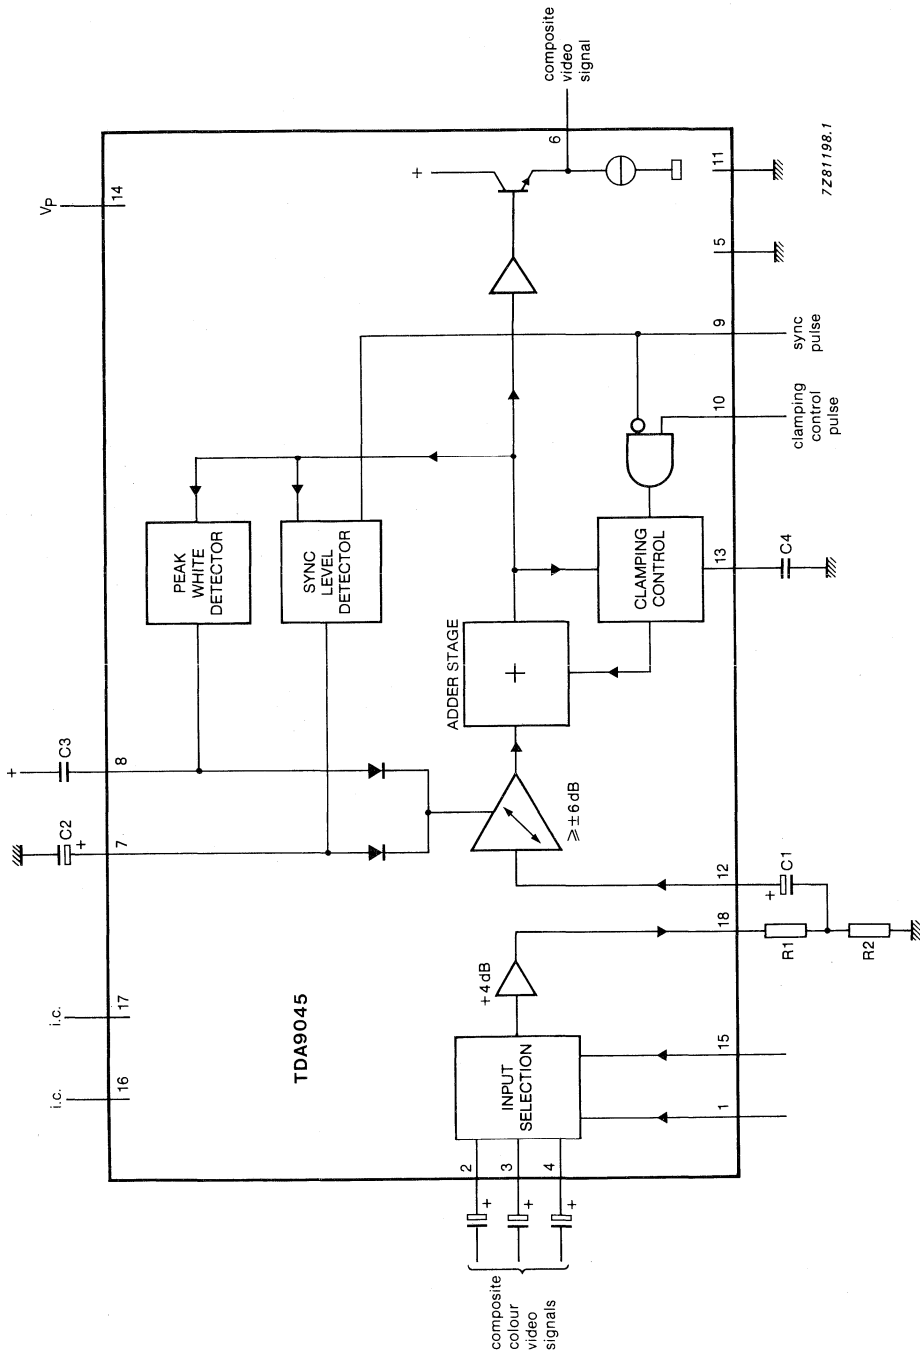


Fig. 1 Block diagram.

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage		$V_P$	0	13,2	V
Voltage on pins 9, 10, 12 to pin 11 (GND)		$V_{n-11}$	0	$V_P$	V
Voltage readings		$V_{2, 3, 4-11}$	0	0,8 $V_P$	V
		$V_{7, 8-11}$	0,7 $V_P$	$V_P$	V
		$V_{13-11}$	0,25 $V_P$	$V_P$	V
		$V_{1, 15-11}$	0	5,5	V
Current readings		$I_6$	—	10	mA
		$I_{18}$	—	20	mA
Total power dissipation		$P_{tot}$	—	1	W
Storage temperature range		$T_{stg}$	-25	+150	°C
Operating ambient temperature range		$T_{amb}$	0	+70	°C

**CHARACTERISTICS**

$V_P = V_{14-11} = 12$  V; trigger pulse width pin 10 = 4  $\mu$ s;  $T_{amb} = 25$  °C; measured in test circuit Fig. 2 unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage		$V_P$	9,6	—	13,2	V
Supply current		$I_P$	—	60	—	mA
<b>Input channel selector</b>						
Input resistance		$R_{1-11}$	—	7,5	—	k $\Omega$
Selector switching voltage select input pin 4		$V_{1-11}$	0	—	1	V
		$V_{15-11}$	0	—	1	V
select input pin 3		$V_{1-11}$	0	—	1	V
		$V_{15-11}$	2,5	5	5,5	V
select input pin 2		$V_{1-11}$	2,5	5	5,5	V
		$V_{15-11}$	2,5	5	5,5	V

DEVELOPMENT DATA

## CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Pre-amplifier</b>						
Composite colour video input signals (peak-to-peak value)		V <sub>2,3,4-11(p-p)</sub>	—	1	2,0	V
Input resistance		R <sub>2,3,4-11</sub>	—	10	—	kΩ
Input capacity		C <sub>2,3,4-11</sub>	—	10	—	pF
Amplification		A <sub>18-2,3,4</sub>	—	4	—	dB
DC output voltage		V <sub>18-11</sub>	—	5,8	6,4	V
Frequency response	0 to 7 MHz		—	—	±2	dB
Signal suppression at output	pin 18 with no input		50	—	—	dB
<b>AGC amplifier</b>						
Input voltage composite video signal (peak-to-peak value)	± 6 dB	V <sub>2,3,4-11(p-p)</sub>	—	0,4	—	V
Input resistance		R <sub>12-11</sub>	—	10	—	kΩ
Input capacity		C <sub>12-11</sub>	—	10	—	pF
Frequency response	0 to 7 MHz		—	—	±2	dB
<b>Peak white and sync pulse level detectors</b>						
capacitor current charging current		-I <sub>8</sub>	—	15	—	mA
discharging current		I <sub>8</sub>	—	0,8	—	μA
capacitor current charging current		-I <sub>7</sub>	—	0,3	—	mA
discharging current		I <sub>7</sub>	—	0,3	—	mA
Threshold voltage for sync level controls		V <sub>9-11</sub>	1	1,8	2,4	V
Input current		-I <sub>9-11</sub>	—	—	50	μA
<b>Clamping control triggering and sync pulse regeneration</b>						
Threshold voltage for clamping control ON	V <sub>9-11</sub> = 0 V	V <sub>10-11</sub>	1	1,8	2,4	V
Input current		-I <sub>10-11</sub>	—	—	50	μA
Charging current		-I <sub>13</sub>	—	0,3	—	mA
Discharging current		I <sub>13</sub>	—	0,3	—	mA
Black level voltage		V <sub>6-11</sub>	5,2	5,6	6	V
Controlled output signal (peak-to-peak value)		V <sub>6-11(p-p)</sub>	3,7	3,9	4,1	V

DEVELOPMENT DATA

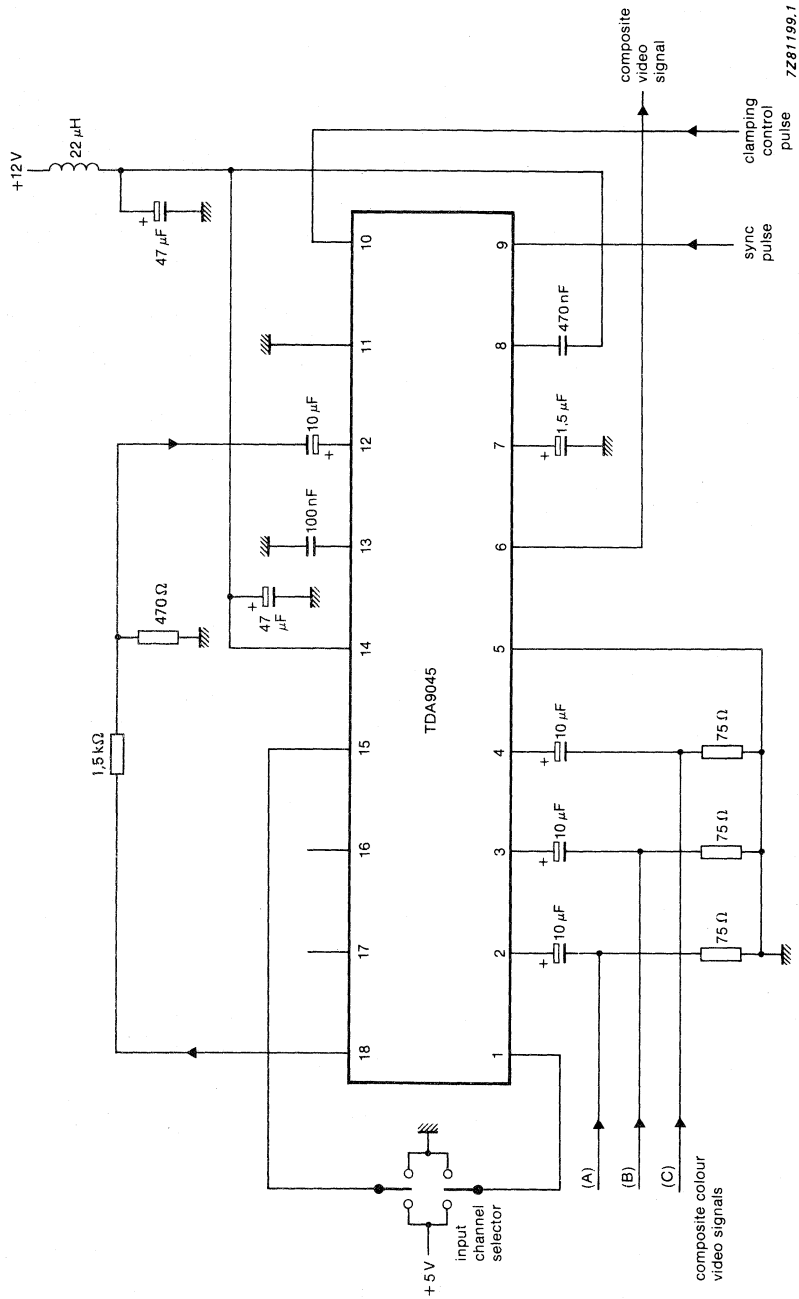


Fig. 2 Application diagram; also used as test circuit.





## CONTROL CIRCUIT FOR SWITCHED-MODE POWER SUPPLY

### GENERAL DESCRIPTION

The TEA1039 is a bipolar integrated circuit intended for the control of a switched-mode power supply. Together with an external error amplifier and a voltage regulator (e.g. a regulator diode) it forms a complete control system. The circuit is capable of directly driving the SMPS power transistor in small SMPS systems.

It has the following features:

- Suited for frequency and duty factor regulation.
- Suited for flyback converters and forward converters.
- Wide frequency range.
- Adjustable input sensitivity.
- Adjustable minimum frequency or maximum duty factor limit.
- Adjustable overcurrent protection limit.
- Supply voltage out-of-range protection.
- Slow-start facility.

### QUICK REFERENCE DATA

Supply voltage	$V_{CC}$	nom.	14 V
Supply current	$I_{CC}$	max.	13 mA
Output pulse repetition frequency range	$f_o$		1 Hz to 100 kHz
Output current LOW	$I_{OL}$	max.	1 A
Operating ambient temperature range	$T_{amb}$		-25 to +125 °C

### PACKAGE OUTLINE

9-lead SIL; plastic (SOT-110B).

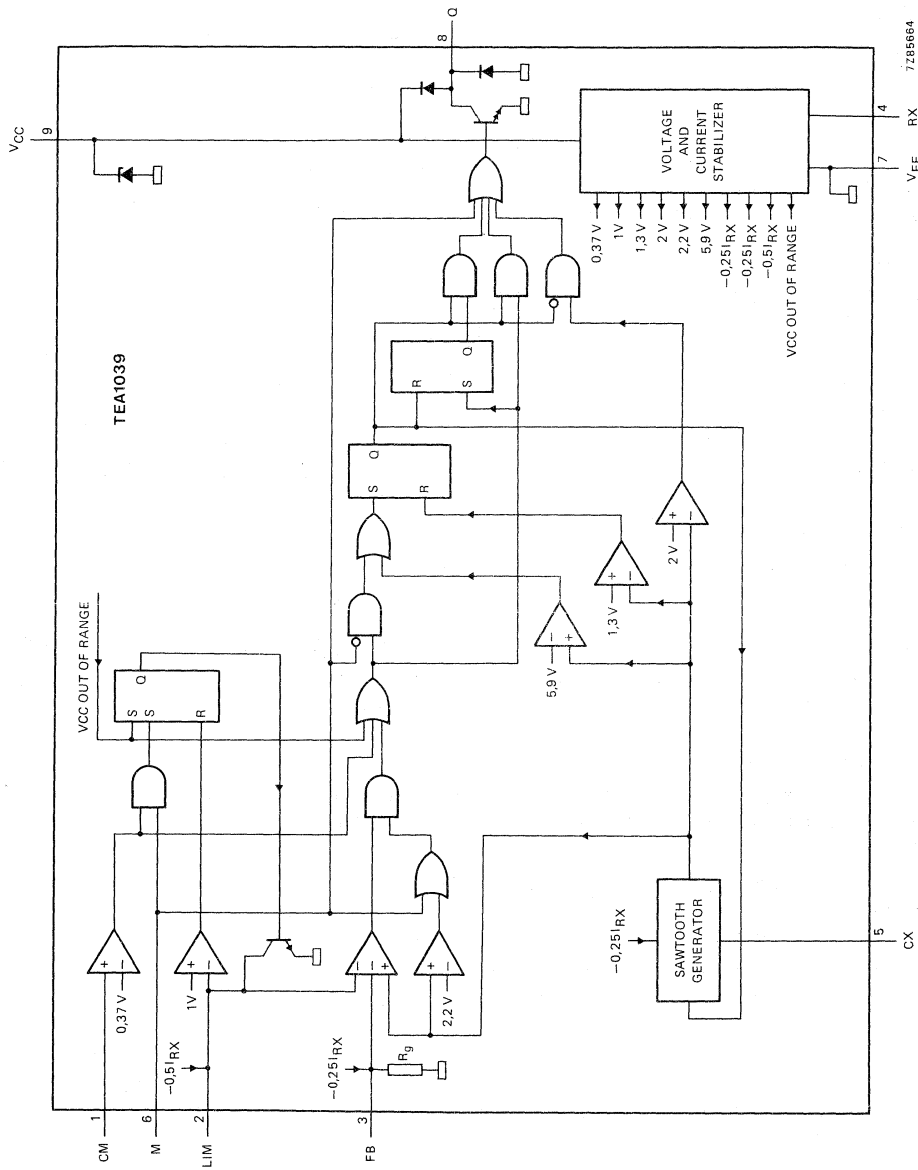
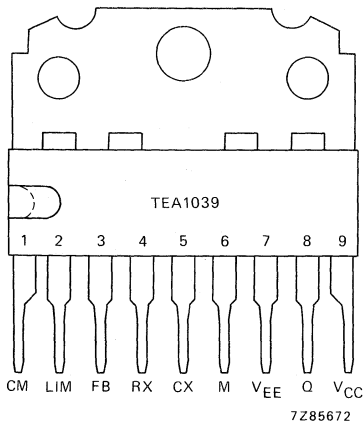


Fig. 1 Block diagram.

**PINNING**

1	CM	overcurrent protection input
2	LIM	limit setting input
3	FB	feedback input
4	RX	external resistor connection
5	CX	external capacitor connection
6	M	mode input
7	V <sub>EE</sub>	common
8	Q	output
9	V <sub>CC</sub>	positive supply connection

Fig. 2 Pinning diagram.

**FUNCTIONAL DESCRIPTION**

The TEA1039 produces pulses to drive the transistor in a switched-mode power supply. These pulses may be varied either in frequency (frequency regulation mode) or in width (duty factor regulation mode).

The usual arrangement is such that the transistor in the SMPS is ON when the output of the TEA1039 is HIGH, i.e. when the open-collector output transistor is OFF. The duty factor of the SMPS is the time that the output of the TEA1039 is HIGH divided by the pulse repetition time.

**Supply V<sub>CC</sub> (pin 9)**

The circuit is usually supplied from the SMPS that it regulates. It may be supplied either from its primary d.c. voltage or from its output voltage. In the latter case an auxiliary starting supply is necessary.

The circuit has an internal V<sub>CC</sub> out-of-range protection. In the frequency regulation mode the oscillator is stopped; in the duty factor regulation mode the duty factor is made zero. When the supply voltage returns within its range, the circuit is started with the slow-start procedure.

When the circuit is supplied from the SMPS itself, the out-of-range protection also provides an effective protection against any interruption in the feedback loop.

**Mode input M (pin 6)**

The circuit works in the frequency regulation mode when the mode input M is connected to ground (V<sub>EE</sub>, pin 7). In this mode the circuit produces output pulses of a constant width but with a variable pulse repetition time.

The circuit works in the duty factor regulation mode when the mode input M is left open. In this mode the circuit produces output pulses with a variable width but with a constant pulse repetition time.

**FUNCTIONAL DESCRIPTION** (continued)**Oscillator resistor and capacitor connections RX and CX** (pins 4 and 5)

The output pulse repetition frequency is set by an oscillator whose frequency is determined by an external capacitor C5 connected between the CX connection (pin 5) and ground ( $V_{EE}$ , pin 7), and an external resistor R4 connected between the RX connection (pin 4) and ground. The capacitor C5 is charged by an internal current source, whose current level is determined by the resistor R4. In the frequency regulation mode these two external components determine the minimum frequency; in the duty factor regulation mode they determine the working frequency (see Fig. 4). The output pulse repetition frequency varies less than 1% with the supply voltage over the supply voltage range.

In the frequency regulation mode the output is LOW from the start of the cycle until the voltage on the capacitor reaches 2 V. The capacitor is further charged until its voltage reaches the voltage on either the feedback input FB or the limit setting input LIM, provided it has exceeded 2,2 V. As soon as the capacitor voltage reaches 5,9 V the capacitor is discharged rapidly to 1,3 V and a new cycle is initiated (see Figs 5 and 6).

For voltages on the FB and LIM inputs lower than 2,2 V, the capacitor is charged until this voltage is reached; this sets an internal maximum frequency limit.

In the duty factor regulation mode the capacitor is charged from 1,3 V to 5,9 V and discharged again at a constant rate. The output is HIGH until the voltage on the capacitor exceeds the voltage on the feedback input FB; it becomes HIGH again after discharge of the capacitor (see Figs 7 and 8). An internal maximum limit is set to the duty factor of the SMPS by the discharging time of the capacitor.

**Feedback input FB** (pin 3)

The feedback input compares the input current with an internal current source whose current level is set by the external resistor R4. In the frequency regulation mode, the higher the voltage on the FB input, the longer the external capacitor C5 is charged, and the lower the frequency will be. In the duty factor regulation mode external capacitor C5 is charged and discharged at a constant rate, the voltage on the FB input now determines the moment that the output will become LOW. The higher the voltage on the FB input, the longer the output remains HIGH, and the higher the duty factor of the SMPS.

**Limit setting input LIM** (pin 2)

In the frequency regulation mode this input sets the minimum frequency, in the duty factor regulation mode it sets the maximum duty factor of the SMPS. The limit is set by an external resistor R2 connected from the LIM input to ground (pin 7) and by an internal current source, whose current level is determined by external resistor R4.

A slow-start procedure is obtained by connecting a capacitor between the LIM input and ground. In the frequency regulation mode the frequency slowly decreases from  $f_{max}$  to the working frequency. In the duty factor regulation mode the duty factor slowly increases from zero to the working duty factor.

**Overcurrent protection input CM** (pin 1)

A voltage on the CM input exceeding 0,37 V causes an immediate termination of the output pulse. In the duty factor regulation mode the circuit starts again with the slow-start procedure.

**Output Q** (pin 8)

The output is an open-collector n-p-n transistor, only capable of sinking current. It requires an external resistor to drive an n-p-n transistor in the SMPS (see Figs 9 and 10).

The output is protected by two diodes, one to ground and one to the supply.

At high output currents the dissipation in the output transistor may necessitate a heatsink. See the power derating curve (Fig. 3).

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range, voltage source	$V_{CC}$	-0,3 to +20 V
Supply current range, current source	$I_{CC}$	-30 to +30 mA
Input voltage range, all inputs	$V_I$	-0,3 to +6 V
Input current range, all inputs	$I_I$	-5 to +5 mA
Output voltage range	$V_{8-7}$	-0,3 to +20 V
Output current range output transistor ON	$I_g$	0 to 1 A
output transistor OFF	$I_g$	-100 to +50 mA
Storage temperature range	$T_{stg}$	-55 to +150 °C
Operating ambient temperature range (see Fig. 3)	$T_{amb}$	-25 to +125 °C
Power dissipation (see Fig. 3)	$P_{tot}$	max. 2 W

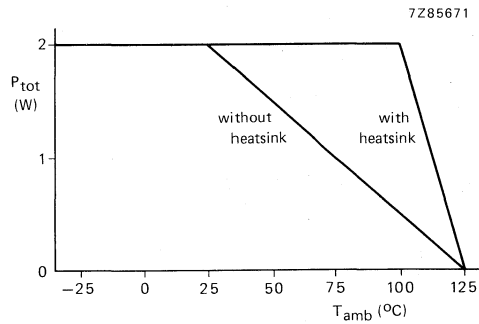


Fig. 3 Power derating curve.

## CHARACTERISTICS

 $V_{CC} = 14 \text{ V}$ ;  $T_{amb} = 25 \text{ }^\circ\text{C}$  unless otherwise specified

	symbol	min.	typ.	max.	unit
<b>Supply <math>V_{CC}</math> (pin 9)</b>					
Supply voltage, operating	$V_{CC}$	11	14	20	V
Supply current					
at $V_{CC} = 11 \text{ V}$	$I_{CC}$	—	7,5	11	mA
at $V_{CC} = 20 \text{ V}$	$I_{CC}$	—	9	12	mA
variation with temperature	$\frac{\Delta I_{CC}}{I_{CC}}$ $\Delta T$	—	-0,3	—	%/K
Supply voltage, internally limited					
at $I_{CC} = 30 \text{ mA}$	$V_{CC}$	23,5	—	28,5	V
variation with temperature	$\Delta V_{CC}/\Delta T$	—	18	—	mV/K
Low supply threshold voltage	$V_{CCmin}$	9	10	11	V
variation with temperature	$\Delta V_{CC}/\Delta T$	—	-5	—	mV/K
High supply threshold voltage	$V_{CCmax}$	21	23	24,6	V
variation with temperature	$\Delta V_{CC}/\Delta T$	—	10	—	mV/K
<b>Feedback input FB (pin 3)</b>					
Input voltage for duty factor = 0; M input open	$V_{3-7}$	0	—	0,3	V
Internal reference current	$-I_{FB}$	—	$0,5 I_{RX}$	—	mA
Internal resistor $R_g$	$R_g$	—	130	—	k $\Omega$
<b>Limit setting input LIM (pin 2)</b>					
Threshold voltage	$V_{2-7}$	—	1	—	V
Internal reference current	$-I_{LIM}$	—	$0,25 I_{RX}$	—	mA
<b>Overcurrent protection input CM (pin 1)</b>					
Threshold voltage	$V_{1-7}$	300	370	420	mV
variation with temperature	$\Delta V_{1-7}/\Delta T$	—	0,2	—	mV/K
Propagation delay, CM input to output	$t_{PHL}$	—	500	—	ns

## CHARACTERISTICS (continued)

	symbol	min.	typ.	max.	unit
<b>Oscillator connections RX and CX (pins 4 and 5)</b>					
Voltage at RX connection at $-I_4 = 0,15$ to $1$ mA	$V_{4-7}$	6,2	7,2	8,1	V
variation with temperature	$\Delta V_{4-7}/\Delta T$	—	2,1	—	mV/K
Lower sawtooth level	$V_{LS}$	—	1,3	—	V
Threshold voltage for output H to L transition in F mode	$V_{FT}$	—	2	—	V
Threshold voltage for maximum frequency in F mode	$V_{FM}$	—	2,2	—	V
Higher sawtooth level	$V_{HS}$	—	5,9	—	V
Internal capacitor charging current, CX connection	$-I_{CX}$	—	$0,25 I_{RX}$	—	mA
Oscillator frequency (output pulse repetition frequency)	$f_o$	1	—	$10^5$	Hz
Minimum frequency in F mode, initial deviation	$\Delta f/f$	-10	—	10	%
variation with temperature	$\frac{\Delta f/f}{\Delta T}$	—	0,034	—	%/K
Maximum frequency in F mode, initial deviation	$\Delta f/f$	-20	—	+20	%
variation with temperature	$\frac{\Delta f/f}{\Delta T}$	—	-0,16	—	%/K
Output LOW time in F mode, initial deviation	$\Delta t/t$	-25	—	+25	%
variation with temperature	$\frac{\Delta t/t}{\Delta T}$	—	0,2	—	%/K
Pulse repetition frequency in D mode, initial deviation	$\Delta f/f$	-10	—	10	%
variation with temperature	$\frac{\Delta f/f}{\Delta T}$	—	0,034	—	%/K
Minimum output LOW time in D mode at $C_5 = 3,6$ nF	$t_{OLmin}$	—	1	—	$\mu s$
variation with temperature	$\frac{\Delta t/t}{\Delta T}$	—	0,2	—	%/K
<b>Output Q (pin 8)</b>					
Output voltage LOW at $I_g = 100$ mA	$V_{8-7}$	—	0,8	1,2	V
variation with temperature	$\Delta V_{8-7}/\Delta T$	—	1,5	—	mV/K
Output voltage LOW at $I_g = 1$ A	$V_{8-7}$	—	1,7	2,1	V
variation with temperature	$\Delta V_{8-7}/\Delta T$	—	-1,4	—	mV/K

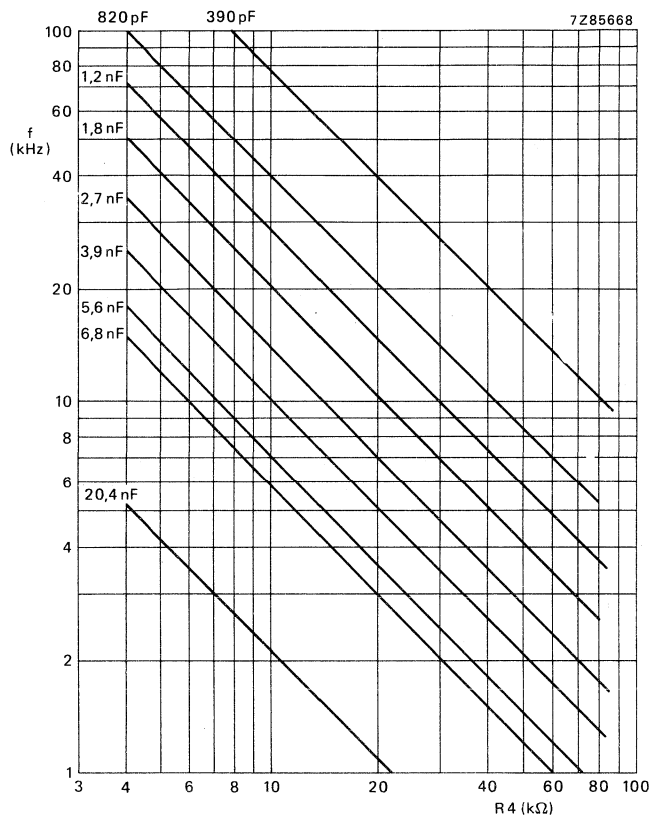


Fig. 4 Minimum pulse repetition frequency in the frequency regulation mode, and working pulse repetition frequency in the duty factor regulation mode, as a function of external resistor R4 connected between RX and ground with external capacitor C5 connected between CX and ground as a parameter.



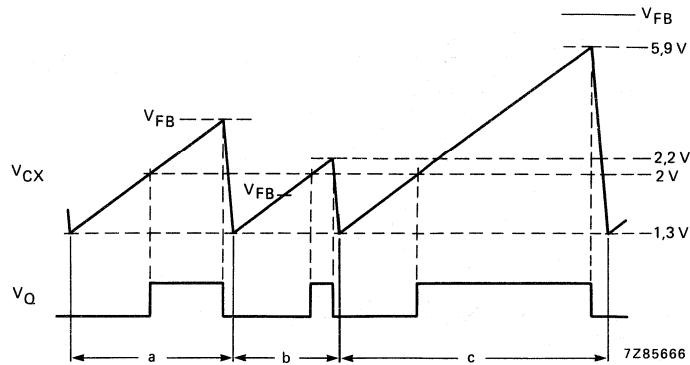


Fig. 5 Timing diagram for the frequency regulation mode showing the voltage on external capacitor C5 connected between CX and ground and the output voltage as a function of time for three combinations of input signals. *a*: The voltages on inputs FB or LIM are between 2,2 V and 5,9 V. The circuit is in its normal regulation mode. *b*: The voltage on input FB or input LIM is lower than 2,2 V. The circuit works at its maximum frequency. *c*: The voltages on inputs FB and LIM are higher than 5,9 V. The circuit works at its minimum frequency.

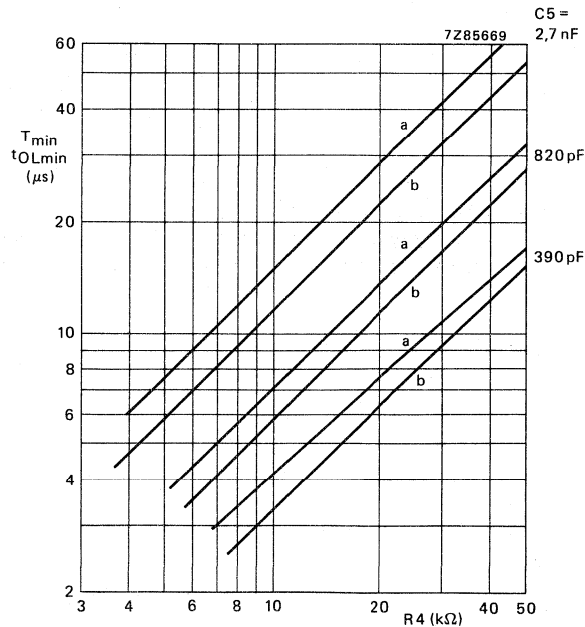


Fig. 6 Minimum output pulse repetition time  $T_{min}$  (curves a) and minimum output LOW time  $t_{OLmin}$  (curves b) in the frequency regulation mode as a function of external resistor R4 connected between RX and ground with external capacitor C5 connected between CX and ground as a parameter.

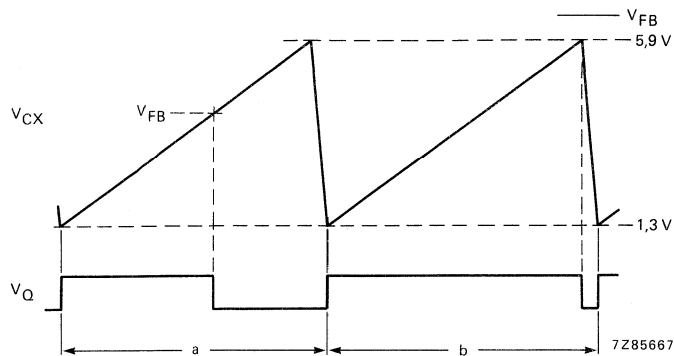


Fig. 7 Timing diagram for the duty factor regulation mode showing the voltage on external capacitor C5 connected between CX and ground and the output voltage as a function of time for two combinations of input signals. *a*: The voltages on inputs FB or LIM are below 5,9 V. The circuit is in its normal regulation range. *b*: The voltages on inputs FB and LIM are higher than 5,9 V. The circuit produces its minimum output LOW time, giving the maximum duty factor of the SMPS.

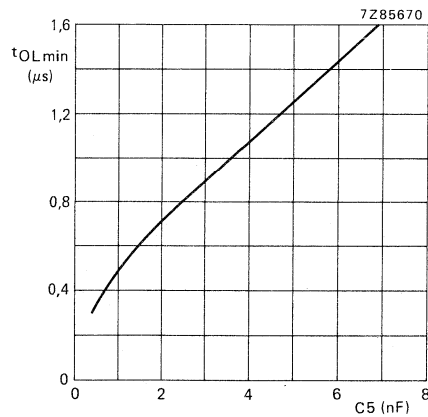


Fig. 8 Minimum output LOW time  $t_{OLmin}$  in the duty factor regulation mode as a function of external capacitor C5 connected between CX and ground. In this mode the minimum output LOW time is independent of R4 for values of R4 between 4 k $\Omega$  and 80 k $\Omega$ .

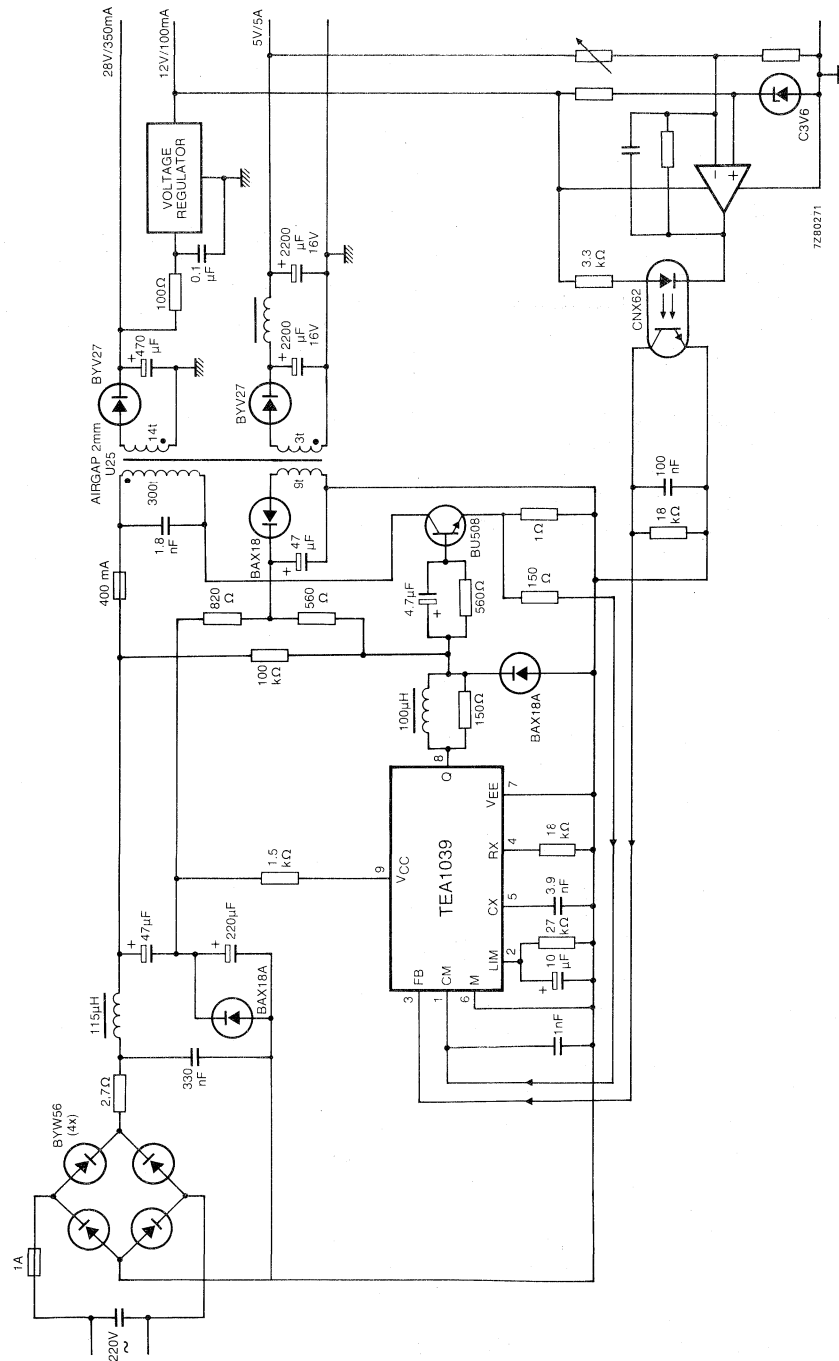


Fig. 9 Typical application of the TEA1039 in a variable-frequency flyback converter switched-mode power supply. An optocoupler CNX62 is used for voltage separation.

APPLICATION INFORMATION SUPPLIED ON REQUEST

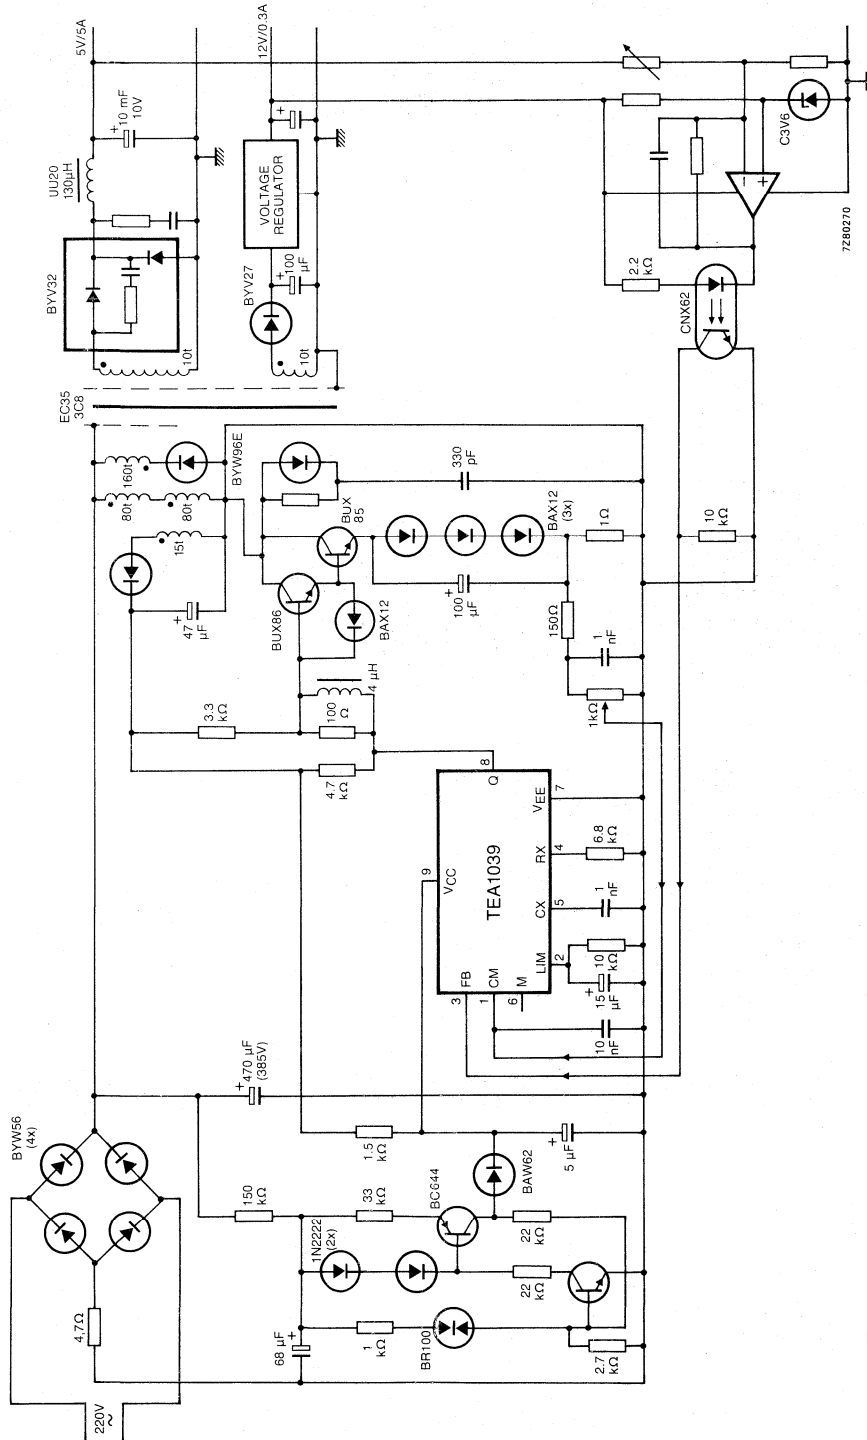


Fig. 10 Typical application of the TEA1039 in a fixed-frequency, variable duty factor forward converter switched-mode power supply. An optocoupler CNX62 is used for voltage separation.

APPLICATION INFORMATION SUPPLIED ON REQUEST

## PAL/NTSC COLOUR ENCODER

### GENERAL DESCRIPTION

The TEA2000 is a monolithic integrated circuit, which encodes colour information and provides composite video output for driving a VHF or UHF modulator.

### Features

- European PAL and American NTSC/M standard selectable
- Internal generation of burst timing and PAL-switch-function
- 6 bit binary TTL compatible input provides 64 different colours
- TTL compatible colour blanking input
- TTL compatible sync input

### QUICK REFERENCE DATA

Supply voltage	$V_{11-9}$	typ.	12 V
Supply current at $V_{11-9} = 12$ V	$I_{11}$	typ.	55 mA
Input voltage pins 1,2,3,4,5,14,16,17,18	$V_{IL}$	max.	0,8 V
	$V_{IH}$	min.	2,0 V
Composite video output (sync tip to white)	$V_{6-9(p-p)}$	typ.	2,0 V
Operating temperature range	$T_{amb}$		0 to + 70 °C

### PACKAGE OUTLINE

18-lead DIL; plastic with internal heat spreader (SOT-102H).

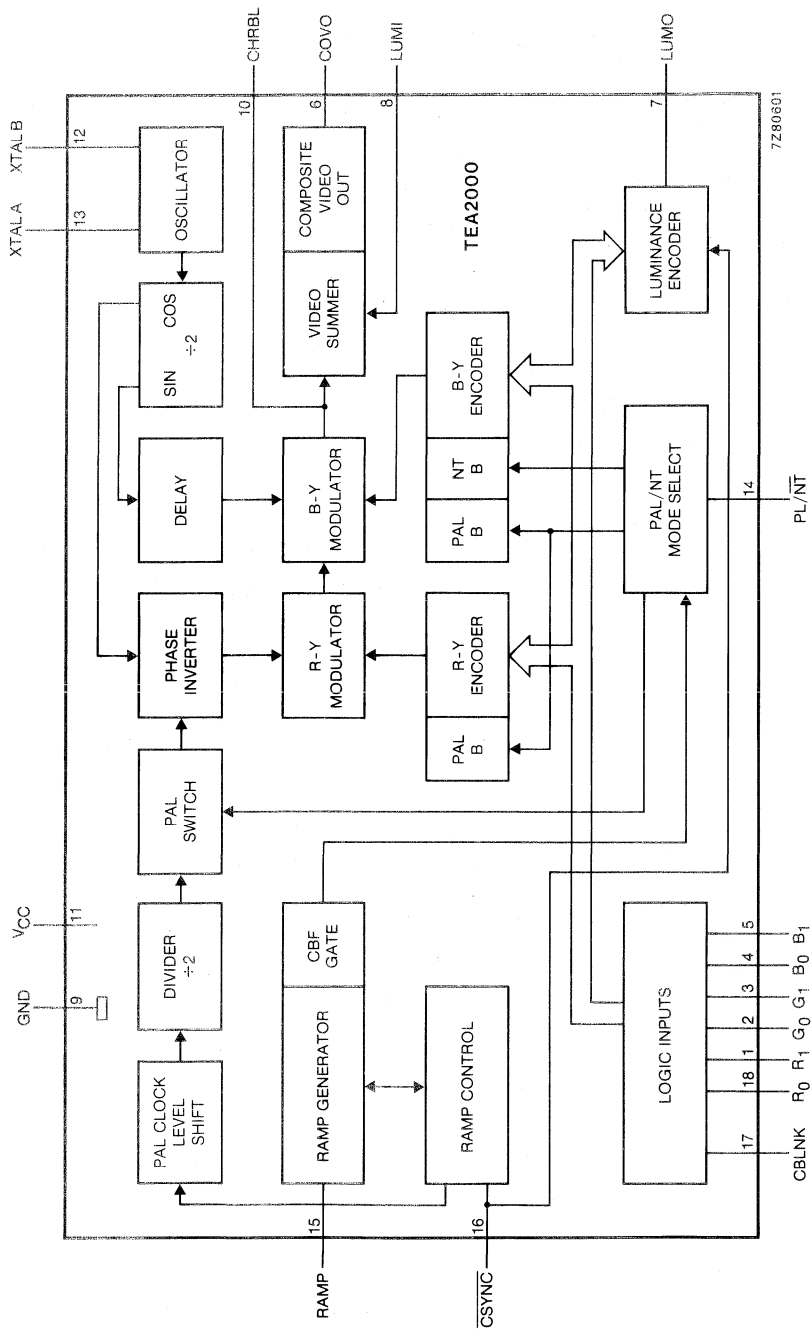


Fig. 1 Block diagram.

**PINNING**

1. Red 1 binary input
2. Green 0 binary input
3. Green 1 binary input
4. Blue 0 binary input
5. Blue 1 binary input
6. Composite video output
7. Luminance output to delay line
8. Luminance input from delay line
9. Ground 0 volt
10. Chrominance band limiting
11. Supply voltage
12. } Oscillator inputs { 7,16 MHz crystal for NTSC
13. } { 8,86 MHz crystal for PAL
14. PAL/NTSC switch
15. Ramp
16. Composite sync input (CSYNC)
17. Composite blanking input (CBLNK)
18. Red 0 binary input

**FUNCTIONAL DESCRIPTION**

The TEA2000 PAL/NTSC colour encoder and video summer integrated circuit has an internal oscillator from which the (R-Y) and (B-Y) waveforms are generated. The TEA2000 accepts timing signals (composite sync, composite blanking) and a 6 bit binary coded input giving colour information. The inputs are organized as 2 bits per primary colour and gamma correction is applied to the resultant luminance and chrominance levels. Each of the equally spaced intensity levels (for each primary colour) is combined with those of the other primary colours. This produces 64 output colours comprising a wide range of saturated and desaturated colours, black, white and two levels of grey. The resultant output is a composite video signal compatible with the PAL and NTSC/M standards.

**PIN DESCRIPTION**

R0, R1, G0, G1, B0, B1, pins 18, 1,2,3,4 and 5.

These are the red, green and blue logic inputs. 2 bits per primary colour. These inputs are TTL compatible.

CSYNC, pin 16.

Composite sync input requiring a negative logic signal, TTL compatible. For PAL operation the field sync must include line sync information.

**XTALA, XTALB**, pins 12 and 13.

Oscillator inputs. A crystal in series with a trimmer capacitor is connected between pins 12 and 13. The output of the oscillator is divided to provide the four subcarrier phases required in the encoder. The crystal frequencies are:

PAL mode 8,867238 MHz  
NTSC mode 7,15909 MHz

**LUMO, LUMI**, pins 7 and 8.

Luminance output and input. The combined luminance and sync signal appearing at pin 7 must be d.c. coupled to pin 8 via an appropriate luminance delay line or resistor network. Resistors must have a tolerance of  $\pm 5\%$ , or better, as they affect the d.c. level at COVO, pin 6.

**CHRBL**, pin 10.

Chrominance filtering can be accomplished by connecting a chrominance frequency tuned filter (4,43 MHz or 3,57 MHz), via a blocking capacitor to pin 10. This point is the chrominance summing junction and has a nominal internal impedance of 1,5 k $\Omega$ . If a filter is used at this point then the delay caused to the chrominance signal should be compensated by an appropriate luminance delay line.

**COVO**, pin 6.

Composite video output is internally buffered giving a nominal output voltage swing of 2 V sync-white and a nominal sync 5 V level.

**PL/NT**, pin 14.

PAL/NTSC, select input selects PAL mode when HIGH and NTSC mode when LOW. This input is TTL compatible. An internal pull-up resistor selects PAL if the pin is not connected.

**RAMP**, pin 15.

Ramp timing component connection. A capacitor and resistor connected to pin 15 provide timing information for the colour burst and for PAL phase switching. Alternative components may be used to optimise for NTSC operation.

**VCC**, pin 11.

12 volt supply.

**GND**, pin 9.

Ground connection, zero volts.

**CBLNK**, pin 17.

Blanking input when high, switches off colour inputs. CBLNK must be high during sync and colour burst unless colour inputs are all low at this time. This input is TTL compatible.

**RATINGS**

Limiting values in accordance with Absolute Maximum System (IEC 134)

Supply voltage $V_{11-g}$	max.	13,2 V
Voltages, pin 1,2,3,4,5,14,16,17,18	max.	$V_{11-g}$ V
Storage temperature		-20 to +125 $^{\circ}$ C
Operating ambient temperature		0 to + 70 $^{\circ}$ C



**CHARACTERISTICS**

$V_{11-9} = 12 \text{ V}$ ;  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$ ; measured in Fig. 3 unless otherwise specified

parameter	symbol	min.	typ.	max.	unit
<b>Supply</b>					
Supply voltage	$V_{11-9}$	10,8	12	13,2	V
Supply current $V_{11-9} = 12 \text{ V}$	$I_{11}$	—	55	—	mA
<b>Oscillator stability, pins 12 and 13</b>					
Crystal type 4322 143 04051					
$V_p = 10,8 \text{ to } 12 \text{ V}$		—	+50	—	Hz
$V_p = 12 \text{ to } 13,2 \text{ V}$		—	-50	—	Hz
<b>Digital inputs</b>					
$\overline{\text{CSYNC}}$ , $\overline{\text{CBLNK}}$ , $\overline{\text{PL/NT}}$ pins 16,17,14					
$\overline{\text{R0}}$ , $\overline{\text{R1}}$ , $\overline{\text{G0}}$ , $\overline{\text{G1}}$ , $\overline{\text{B0}}$ , $\overline{\text{B1}}$ pins 18,1,2,3,4,5					
$V_{\text{IN}} \text{ (LOW)}$	$V_{\text{IL}}$	-0,5	—	0,8	V
$V_{\text{IN}} \text{ (HIGH)}$	$V_{\text{IH}}$	2	—	$V_{11-9}$	V
Input capacitance	$C_i$	—	—	10	pF
Input rise and fall times	$t_r, t_f$	—	—	200	ns
$\overline{\text{CSYNC}}$ , $\overline{\text{CBLNK}}$ , $\overline{\text{R0}}$ , $\overline{\text{R1}}$ , $\overline{\text{G0}}$ , $\overline{\text{G1}}$ , $\overline{\text{B0}}$ , $\overline{\text{B1}}$ pins 16,17,18,1,2,3,4,5					
Input current d.c. for $V_{\text{IN}} = 0 \text{ V}$	$I_{\text{IL}}$	—	—	-100	$\mu\text{A}$
Input current d.c. for $V_{\text{IN}} = 2 \text{ V}$	$I_{\text{IH}}$	—	—	20	$\mu\text{A}$
$\overline{\text{PL/NT}}$ , pin 14					
Input current d.c. for $V_{\text{IN}} = 0 \text{ V}$	$I_{\text{IL}}$	—	—	-500	$\mu\text{A}$
Input current d.c. for $V_{\text{IN}} = 2 \text{ V}$	$I_{\text{IH}}$	—	—	-200	$\mu\text{A}$
<b>Composite video output, pin 6</b>					
Output amplitude (sync tip-white)	$V_{6-9} \text{ (p-p)}$	—	2	—	V
Sync tip level	$V_{6-9}$	—	5	—	V
Output load resistor	$R_{6-9}$	0,47	1	—	$\text{k}\Omega$
Variation of output amplitude					
$T_{\text{amb}} = 0 \text{ to } +70 \text{ }^\circ\text{C}$	$V_{\text{(p-p)}}$	—	—	tbF	%
Over supply range					
$V_{11-9} = 10,8 \text{ to } 13,2 \text{ V}$	$\Delta V$	—	—	tbF	%
Output impedance (with $1 \text{ k}\Omega$ load)	$R_L$	—	15	—	$\Omega$
Residual chrominance on white	$\Delta V_{\text{rms}}$	—	30	—	mV
Tolerance on luminance amplitude	$\Delta V$	—	10	—	%
Tolerance on chrominance amplitude	$\Delta V$	—	10	—	%
Tolerance on chrominance phase	$\Delta Q$	—	tbF	—	%
<b>Chrominance band limiting, pin 10</b>					
Internal resistance	$R_{10-11}$	—	1,5	—	$\text{k}\Omega$
<b>Luminance delay, pins 7 and 8</b>					
Nominal series resistor ( $\pm 5\%$ )	$R_S$	—	1,2	—	$\text{k}\Omega$
Nominal load resistor at luminance input ( $\pm 5\%$ )	$R_L$	—	1	—	$\text{k}\Omega$
<b>Ramp timing, pin 15 (see Fig. 4)</b>					
With external RC circuit					
$R = 36 \text{ k}\Omega$ ; $C = 330 \text{ pF}$ (note 1)					
Start of burst from line sync	$t_b$	—	5,7	—	$\mu\text{s}$
Burst width	$t_w$	—	2,5	—	$\mu\text{s}$
Threshold for separation of equalizing pulses and sync pulses	$t$	36	44	56	$\mu\text{s}$

**Note:** 1. A figure of  $5 \text{ pF}$  is assumed for external capacitance. This figure includes temperature dependence of the components.

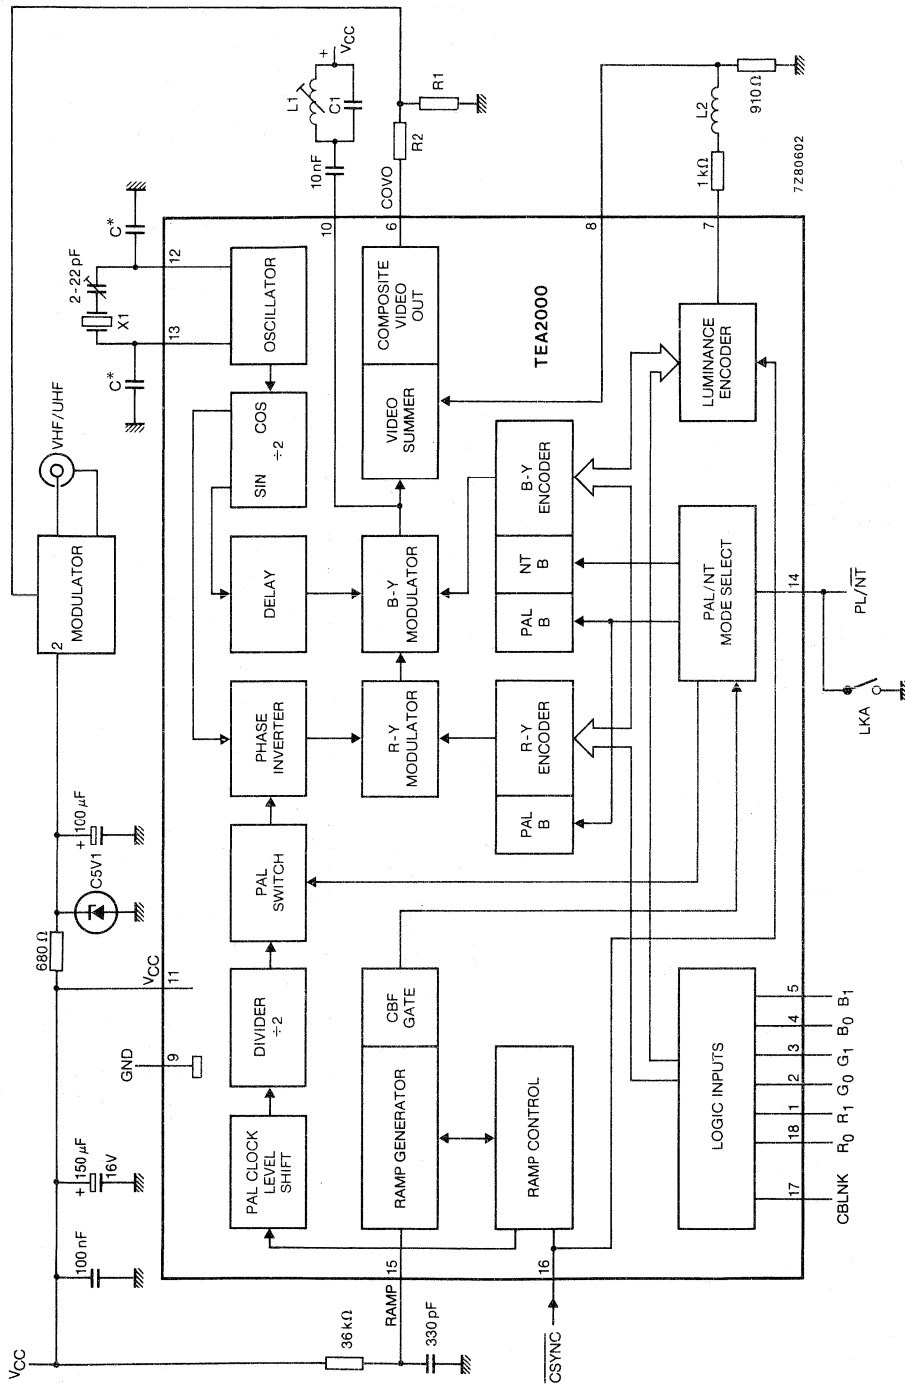


Fig. 2 Internal circuit details and typical external connections.

X1 (PAL) = 8,867238 MHz  
 X1 (NTSC) = 7,159100 MHz  
 C\* = 5,6 pF only for mask version 1

COMPONENT	PAL	NTSC
L1	15 $\mu$ H	18 $\mu$ H
C1	82 pF	100 pF
L2	DL270	DL330
R1	430 $\Omega$	510 $\Omega$
R2	510 $\Omega$	750 $\Omega$
M1	UM1233	UM1622
LKA	o/c	made

Component list for Fig. 2.

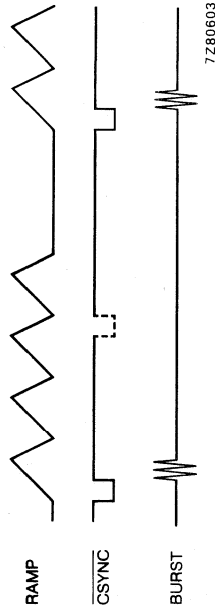


Fig. 3 Ramp timing.





### RADIO TUNING PLL FREQUENCY SYNTHESIZER

#### GENERAL DESCRIPTION

The TSA6057 is a bipolar single chip frequency synthesizer manufactured in SUBILO-N technology (components vertically separated by oxide). It performs all the tuning functions of a PLL radio tuning system. The IC is designed for application in all types of radio receivers.

#### Features

- On-chip AM and FM prescalers with high input sensitivity
- On-chip high performance one input (two output) tuning voltage amplifier for the AM and FM loop filters
- On-chip 2-level current amplifier (charge pump) to adjust the loop gain
- Only one reference frequency (4 MHz) for both AM and FM
- High speed tuning due to a powerful digital memory phase detector
- 40 kHz output reference frequency for co-operation with the FM/IF system and microcomputer-based tuning interface IC (TEA6100)
- Oscillator frequency ranges of: 512 kHz to 30 MHz and 30 MHz to 150 MHz
- Three selectable reference frequencies of 1 kHz, 10 kHz or 25 kHz for both tuning ranges
- Serial 2-wire I<sup>2</sup>C bus interface to a microcomputer and one programmable address input
- Software controlled bandswitch output

#### QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage pin 3 pin 16		$V_{CC1} = V_{3-4}$ $V_{CC2} = V_{16-4}$	4,5 $V_{CC1}$	5,0 8,5	5,5 12	V V
Supply current pin 3 pin 16	no outputs loaded	$I_3$ $I_{16}$	12 0,2	20 0,5	28 1,0	mA mA
Max. input frequency on AM		$f_{iAM}$	30	—	—	MHz
Min. input frequency on AM		$f_{iAM}$	—	—	0,512	MHz
Max. input frequency on FM		$f_{iFM}$	150	—	—	MHz
Min. input frequency on FM		$f_{iFM}$	—	—	30	MHz
Input voltage on AM (r.m.s. value)	$V_{iFM} = 0 V$	$V_{iAM(rms)}$	30	—	500	mV
Input voltage on FM (r.m.s. value)	$V_{iAM} = 0 V$	$V_{iFM(rms)}$	20	—	300	mV
Total power dissipation		$P_{tot}$	—	0,14	—	W
Operating ambient temperature range		$T_{amb}$	-30	—	+ 85	°C

#### PACKAGE OUTLINE

16-lead DIL; plastic (SOT-38).

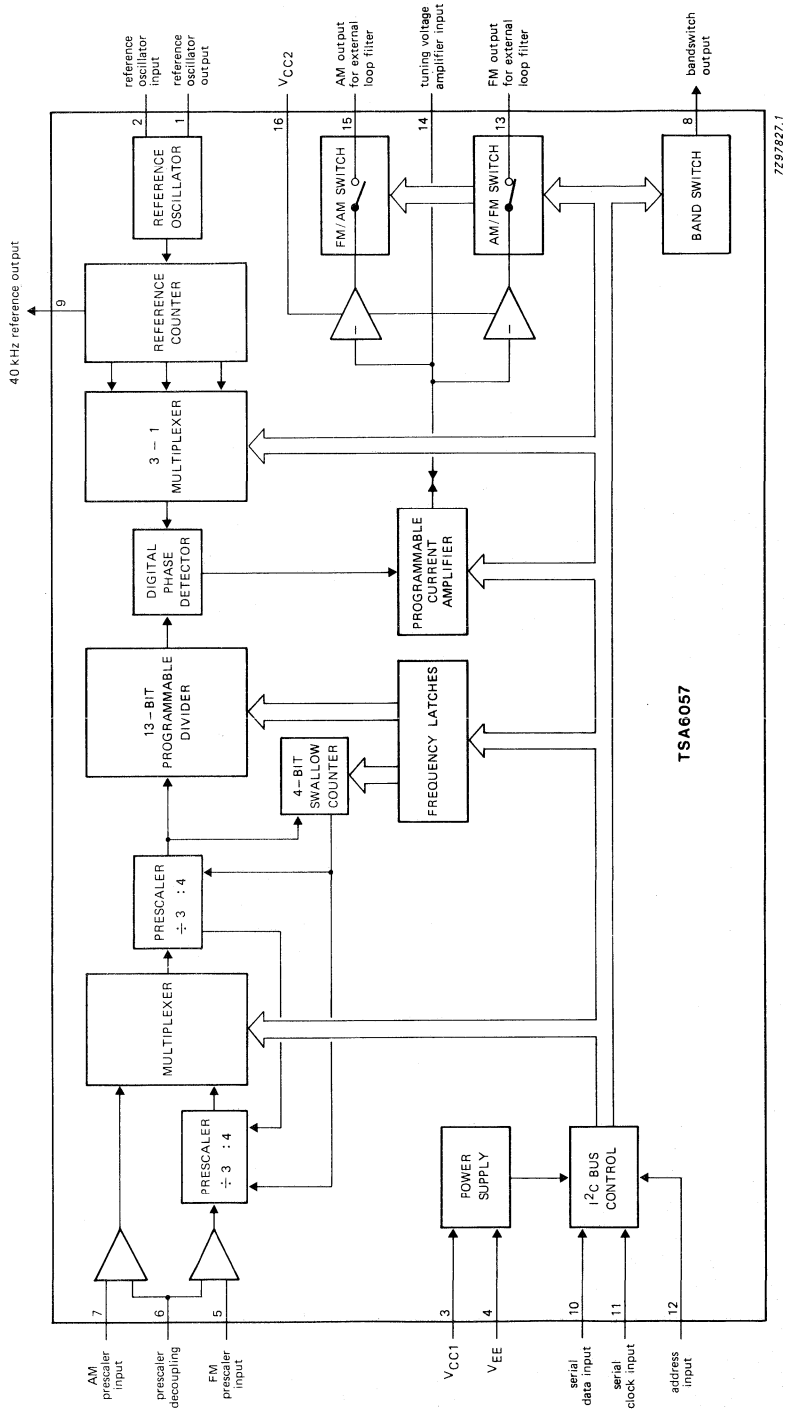


Fig. 1 Block diagram.

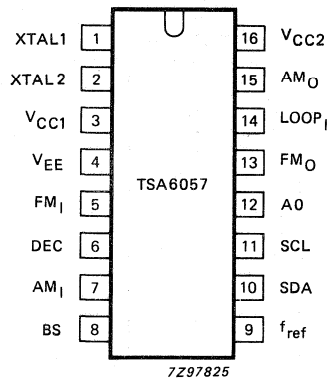


Fig. 2 Pinning diagram.

## PINNING

1	XTAL1	reference oscillator output
2	XTAL2	reference oscillator input
3	VCC1	positive supply voltage
4	VEE	ground
5	FM <sub>I</sub>	FM prescaler input
6	DEC	prescaler decoupling
7	AM <sub>I</sub>	AM prescaler input
8	BS	bandswitch output
9	f <sub>ref</sub>	40 kHz reference output
10	SDA	serial data input
11	SCL	serial clock input
12	AO	address input
13	FM <sub>O</sub>	FM output for external loop filter
14	LOOP <sub>I</sub>	tuning voltage amplifier input
15	AM <sub>O</sub>	AM output for external loop filter
16	VCC2	positive supply voltage

DEVELOPMENT DATA

## FUNCTIONAL DESCRIPTION

The TSA6057 contains the following parts and facilities:

- Separate input amplifiers for the AM and FM VCO-signals.
- A prescaler with the divisors 3:4 on AM and 15:16 on FM, a multiplexer to select AM or FM and a 4-bit programmable swallow counter.
- A 13-bit programmable counter.
- A digital memory phase detector.
- A reference frequency channel comprised of a 4 MHz crystal oscillator followed by a reference counter. The reference frequency can be 1 kHz, 10 kHz or 25 kHz and is applied to the digital memory phase detector. The reference counter also outputs a 40 kHz reference frequency to pin 9 for co-operation with the FM/IF system and microcomputer-based tuning interface IC (TEA6100).
- A programmable current amplifier (charge pump) which consists of a 5  $\mu$ A and a 450  $\mu$ A current source. This allows adjustment of loop gain, thus providing high current-high speed tuning and low current-stable tuning.
- A one input – two output tuning voltage amplifier. One output is connected to the external AM loop filter and the other output to the external FM loop filter. The AM output is switched to a high impedance state by the FM/AM switch in the FM position and the FM output is switched to a high impedance state by the AM/FM switch in the AM position. The outputs can deliver a tuning voltage of up to 10,5 V.
- An I<sup>2</sup>C bus interface with data latches and control logic. The I<sup>2</sup>C bus is intended for communication between microcontrollers and different ICs or modules. Detailed information on the I<sup>2</sup>C bus specification is available on request.
- A software-controlled bandswitch output.

## FUNCTIONAL DESCRIPTION (continued)

## Controls

The TSA6057 is controlled via the 2-wire I<sup>2</sup>C bus. For programming there is one module address, a logic 0 R/W bit, a subaddress byte and four data bytes. The subaddress determines which one of the four data bytes is transmitted first. The module address contains a programmable address bit (D1) which with address input A0 (pin 12) makes it possible to operate two TSA6057s in one system.

The auto increment facility of the I<sup>2</sup>C bus allows programming of the TSA6057 within one transmission (address + subaddress + 4 data bytes).

- The TSA6057 can also be partially programmed. Transmission must then be ended by a stop condition.

The bit organization of the 4 data bytes is shown in Fig. 3 and are described in sections (a) to (f).

- (a) The bits S0 to S16 together with bit FM/ $\overline{\text{AM}}$  are used to set the divisor of the input frequency at inputs AM<sub>I</sub> (pin 7) or FM<sub>I</sub> (pin 5). If the system in-lock the following is valid:

FM/ $\overline{\text{AM}}$	input frequency ( $f_i$ )	input
0	$(S0 \times 2^0 + S1 \times 2^1 + S13 \times 2^{13} + S14 \times 2^{14}) \times f_{\text{ref}}$	AM <sub>I</sub>
1	$(S0 \times 2^0 + S1 \times 2^1 + S15 \times 2^{15} + S16 \times 2^{16}) \times f_{\text{ref}}$	FM <sub>I</sub>

## Where

The minimum dividing ratio for AM mode is  $2^6 = 64$

The minimum dividing ratio for FM mode is  $2^8 = 256$

- (b) The bit CP is used to control the charge pump current.

CP	current
0	low
1	high

- (c) The bits REF1 and REF2 are used to set the reference frequency applied to the phase detector.

REF1	REF2	frequency (kHz)
0	0	1
0	1	10
1	0	25
1	1	none

- (d) The bit  $\overline{\text{FM}}/\text{AM}$  OPAMP controls the switch AM/FM; FM/AM in the tuning voltage amplifier output circuitry.


$\overline{\text{FM}}/\text{AM}$ OPAMP	switch FM/AM	switch AM/FM
1	closed	open
0	open	closed



(e) The bit BS controls the open collector bandswitch output.

BS	bandswitch output
1	sink current
0	floating

(f) The data byte DB3 must be set to 0 . . . . .0. It is also used for test purposes.

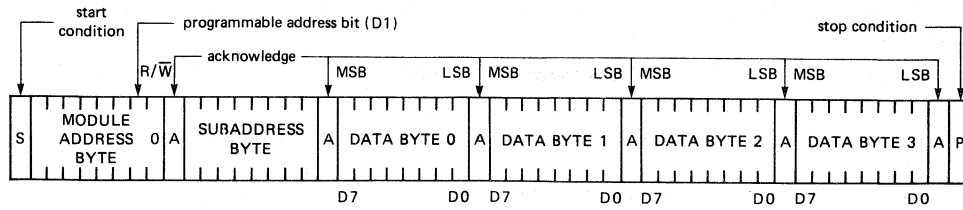

DEVELOPMENT DATA

	MSB								LSB
MODULE ADDRESS	1	1	0	0	0	1	0/1	0	
	D7							D0	
SUBADDRESS	0	0	0	0	0	0	0/1	0/1	
DATA BYTE 0 (DB0)	S6	S5	S4	S3	S2	S1	S0	CP	
DATA BYTE 1 (DB1)	S14	S13	S12	S11	S10	S9	S8	S7	
DATA BYTE 2 (DB2)	REF1	REF2	FM/AM	FM/AM OPAMP	NOT USED	BS	S16	S15	
DATA BYTE 3 (DB3)	T1	T2	T3	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	

Examples using auto-increment facility

S	ADDRESS	A	SUBADDRESS 02	A	DB2	A	DB3	A	P				
S	ADDRESS	A	SUBADDRESS 00	A	DB0	A	DB1	A	P				
S	ADDRESS	A	SUBADDRESS 03	A	DB3	A	DB0	A	DB1	A	DB2	A	P

7297826.1

Fig. 3 Bit organization.

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	symbol	min.	max.	unit
Supply voltage (pin 3)	$V_{CC1} = V_{3-4}$	-0,3	5,5	V
Supply voltage (pin 16)	$V_{CC2} = V_{16-4}$	$V_{CC1}$	12,5	V
Total power dissipation	$P_{tot}$	-	0,85	W
Operating ambient temperature	$T_{amb}$	-30	+ 85	°C
Storage temperature range	$T_{stg}$	-65	+ 150	°C

## CHARACTERISTICS

 $V_{CC1} = 5\text{ V}$ ;  $V_{CC2} = 8,5\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage (pin 3)		$V_{CC1}$	4,5	5,0	5,5	V
Supply voltage (pin 16)		$V_{CC2}$	$V_{CC1}$	8,5	12	V
Supply current pin 3	no outputs loaded	$I_{CC1}$	12	20	28	mA
pin 16		$I_{CC2}$	0,2	0,5	1,0	mA
<b>I<sup>2</sup>C bus inputs</b> (SDA; SCL; AO)						
Input voltage HIGH		$V_{IH}$	3,0	-	5,0	V
Input voltage LOW		$V_{IL}$	-0,3	-	1,5	V
Input current HIGH		$I_{IH}$	-	-	10	μA
Input current LOW		$I_{IL}$	-	-	10	μA
<b>SDA output</b>						
Output voltage LOW	open collector $I_{OL} = 3,0\text{ mA}$	$V_{OL}$	-	-	0,4	V
<b>RF input (AM; FM)</b>						
Max. input frequency on AM		$f_{iAM}$	30	-	-	MHz
Min. input frequency on AM		$f_{iAM}$	-	-	0,512	MHz
Max. input frequency on FM		$f_{iFM}$	150	-	-	MHz
Min. input frequency on FM		$f_{iFM}$	-	-	30	MHz
Input voltage on AM (r.m.s. value)	$V_{iFM} = 0\text{ V}$ measured in Fig. 4	$V_{iAM(rms)}$	30	-	500	mV
Input impedance AM resistance		$R_{AM}$	-	5,9	-	kΩ
capacitance		$C_{AM}$	-	2	-	pF
Input voltage on FM (r.m.s. value)	$V_{iAM} = 0\text{ V}$ measured in Fig. 4	$V_{iFM(rms)}$	20	-	300	mV
Input impedance FM resistance		$R_{FM}$	-	3,6	-	kΩ
capacitance		$C_{FM}$	-	2	-	pF

DEVELOPMENT DATA

parameter	conditions	symbol	min.	typ.	max.	unit
<b>Oscillator (XTAL1; XTAL2)</b>						
Crystal resonance resistance (4 MHz)	see Fig. 5	$R_{XTAL}$	—	—	150	$\Omega$
<b>Programmable charge pump</b>						
Output current to loop filter bit CP = logic 0		$I_{chp}$	3	5	7	$\mu A$
bit CP = logic 1		$I_{chp}$	400	500	600	$\mu A$
<b>Ripple rejection</b>						
	$f_{ripple} = 100 \text{ Hz}$					
$20 \log \Delta V_{CC1}/\Delta V_O$		RR	40	50	—	dB
$20 \log \Delta V_{CC2}/\Delta V_O$		RR	40	50	—	dB
<b>Bandswitch output (pin 8)</b>						
Output voltage HIGH		$V_{OH}$	—	—	12	V
Output voltage LOW	$I_{OL} = 3 \text{ mA}$	$V_{OL}$	—	—	0,8	V
Output sink current		$I_{sink}$	—	—	3	mA
Output leakage current	$V_{OH} = 12 \text{ V}$	$I_{LO}$	—	—	10	$\mu A$
<b>Reference frequency output (pin 9)</b>						
Output frequency	4 MHz crystal	$f_{ref}$	—	40	—	kHz
Output voltage HIGH	$I_{source} = 5 \mu A$	$V_{OH}$	1,2	1,4	1,7	V
Output voltage LOW		$V_{OL}$	—	0,1	0,2	V
<b>Tuning voltage amplifier outputs</b>						
<b>AM output (pin 15)</b>						
max. output voltage	$I_{source} = 0,5 \text{ mA}$	$V_{O(max)}$	$V_{CC2}$ —1,5	—	—	V
min. output voltage	$I_{sink} = 1 \text{ mA}$	$V_{O(min)}$	—	—	0,8	V
max. output source current		$I_{source}$	0,5	—	—	mA
max. output sink current		$I_{sink}$	1,0	—	—	mA
<b>FM output (pin 13)</b>						
max. output voltage	$I_{source} = 0,5 \text{ mA}$	$V_{O(max)}$	$V_{CC2}$ —1,5	—	—	V
min. output voltage	$I_{sink} = 1 \text{ mA}$	$V_{O(min)}$	—	—	0,8	V
max. output source current		$I_{source}$	0,5	—	—	mA
max. output sink current		$I_{sink}$	1,0	—	—	mA
Impedance of switched off output		$Z_{O(off)}$	5	—	—	$M\Omega$
Input bias current (absolute value)		$I_{bias}$	—	1	5	nA



Purchase of Philips' I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C-system provided the system conforms to the I<sup>2</sup>C specifications defined by Philips.

APPLICATION INFORMATION

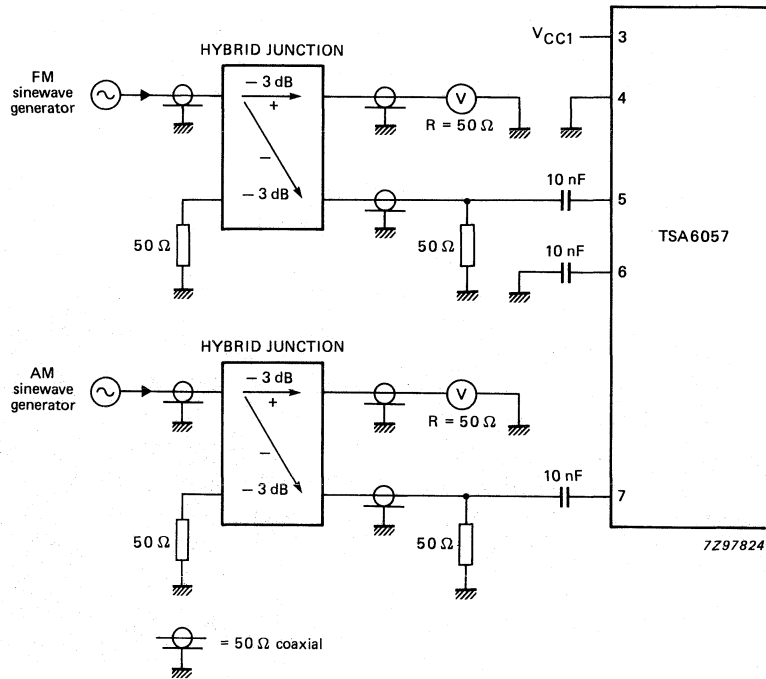


Fig. 4 Prescaler input sensitivity.

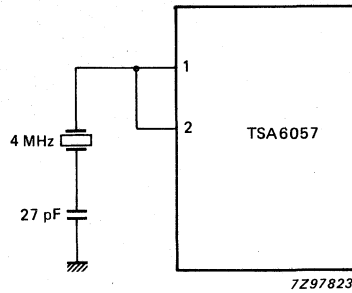


Fig. 5 Crystal connection (4 MHz).

DEVELOPMENT DATA

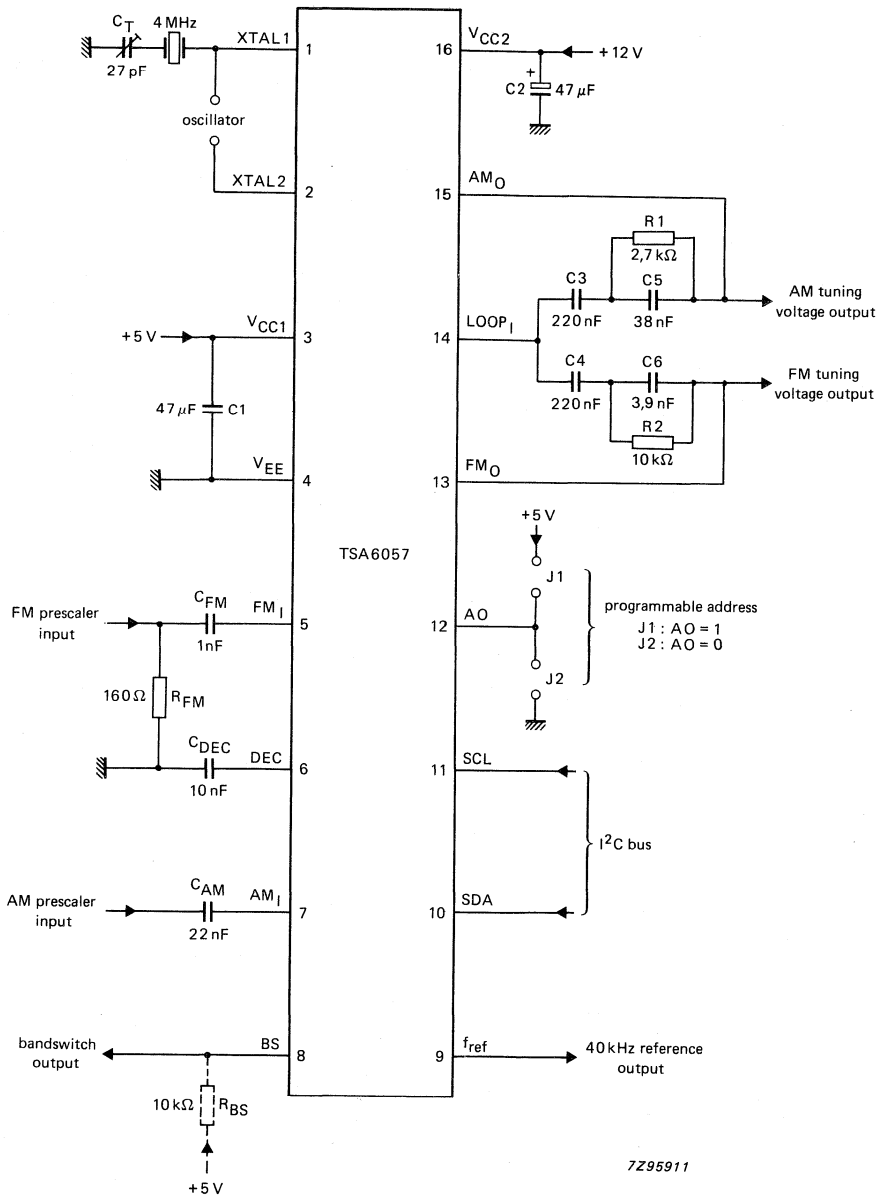


Fig. 6 Application diagram



## **PACKAGE INFORMATION**


**Package outlines**

**Soldering**







## 14-LEAD DUAL IN-LINE; PLASTIC (SOT27)

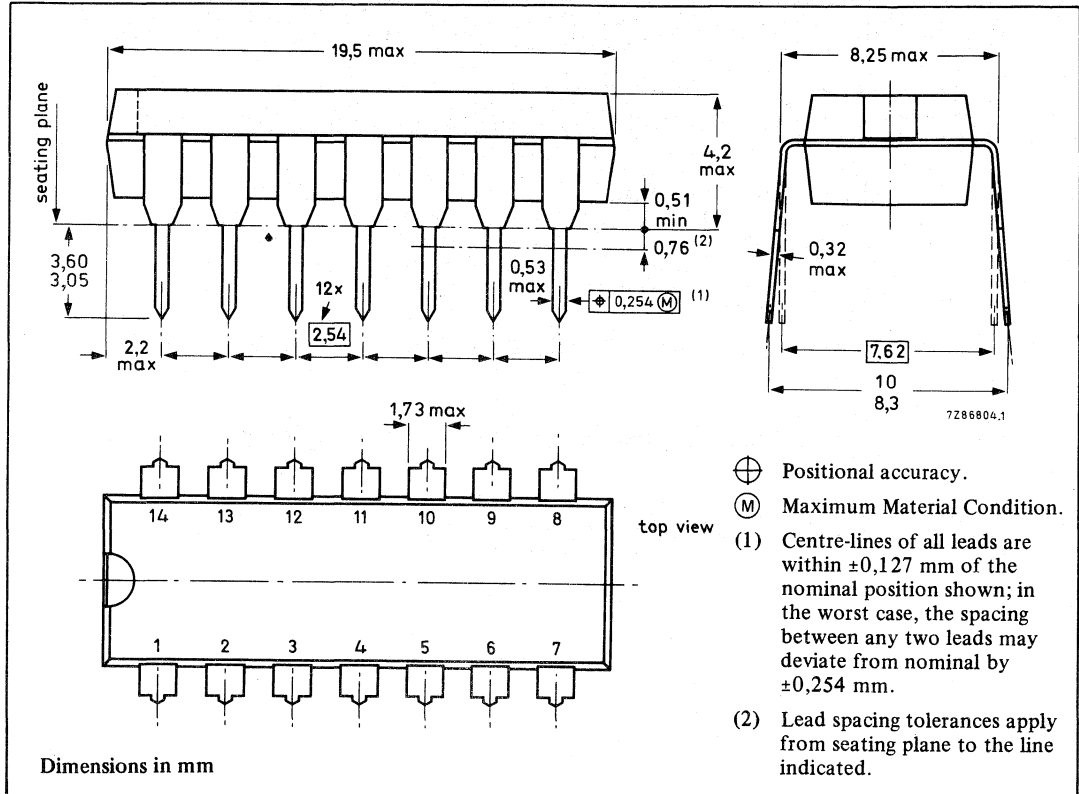

## 16-LEAD DUAL IN-LINE; PLASTIC (SOT38)

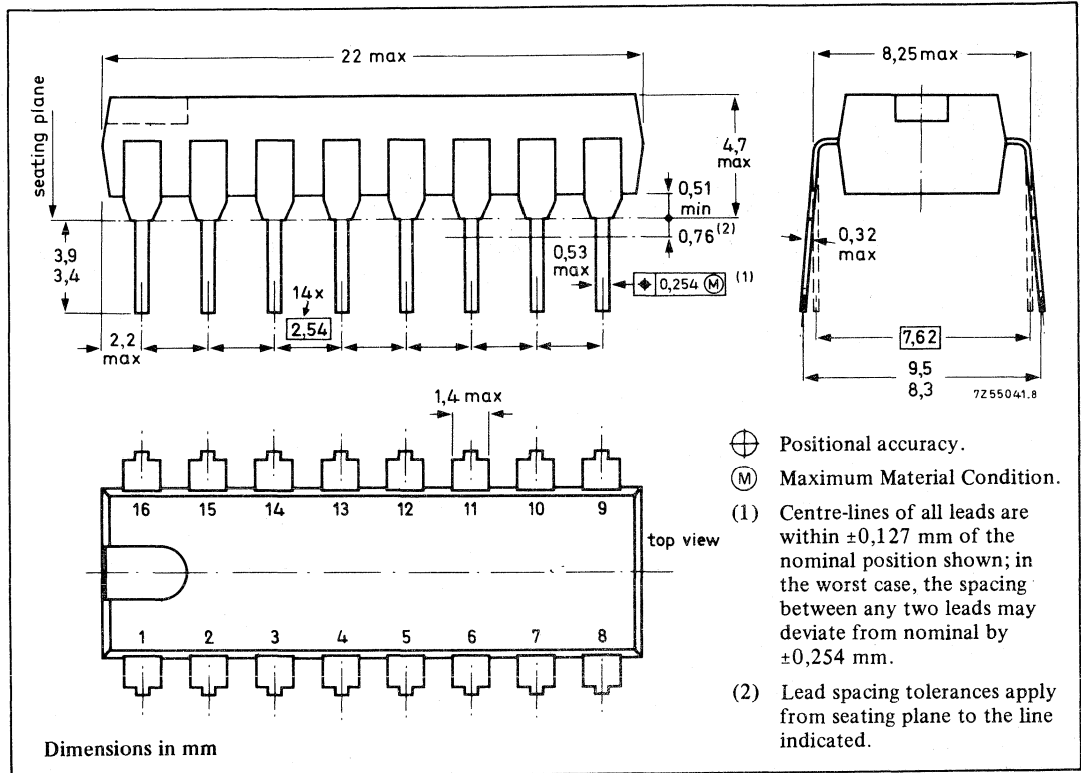


## 16-LEAD DUAL IN-LINE; PLASTIC WITH INTERNAL HEAT SPREADER (SOT38)

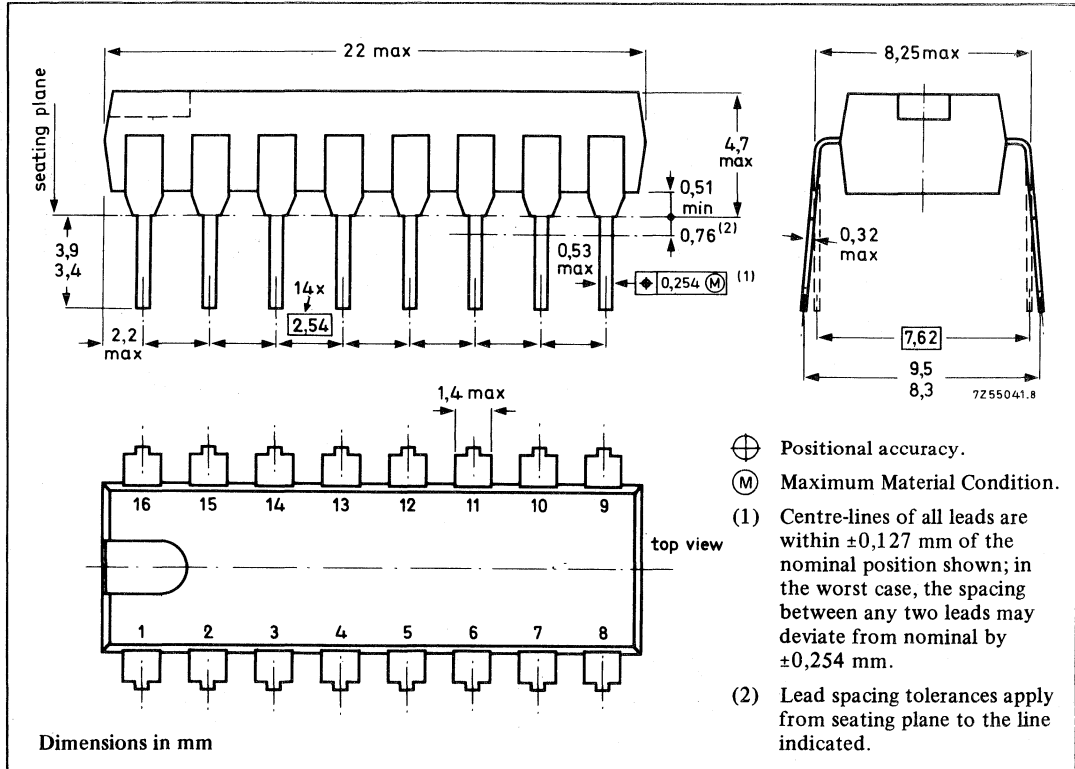


- ⊕ Positional accuracy.
- (M) Maximum Material Condition.
- (1) Centre-lines of all leads are within  $\pm 0,127$  mm of the nominal position shown; in the worst case, the spacing between any two leads may deviate from nominal by  $\pm 0,254$  mm.
- (2) Lead spacing tolerances apply from seating plane to the line indicated.


## 16-LEAD DUAL IN-LINE; PLASTIC (SOT38D)

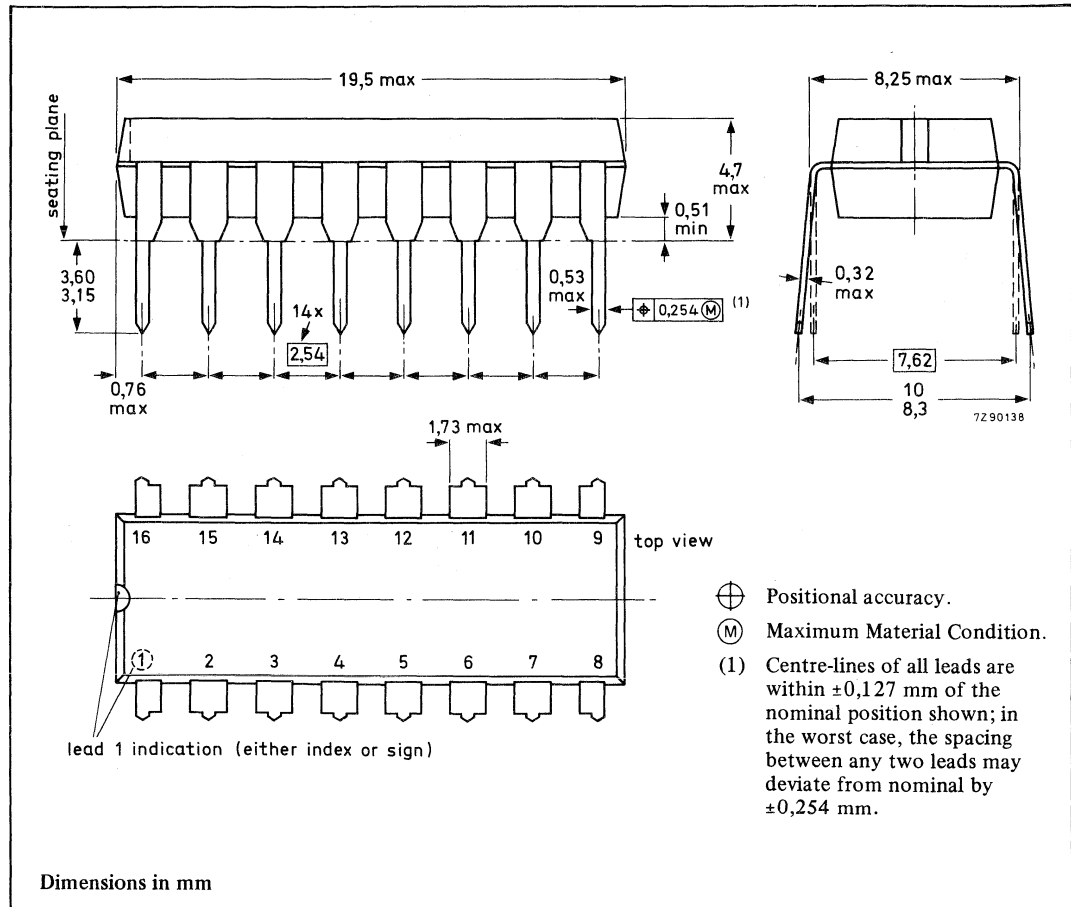


## 16-LEAD DUAL IN-LINE; PLASTIC (SOT38Z)

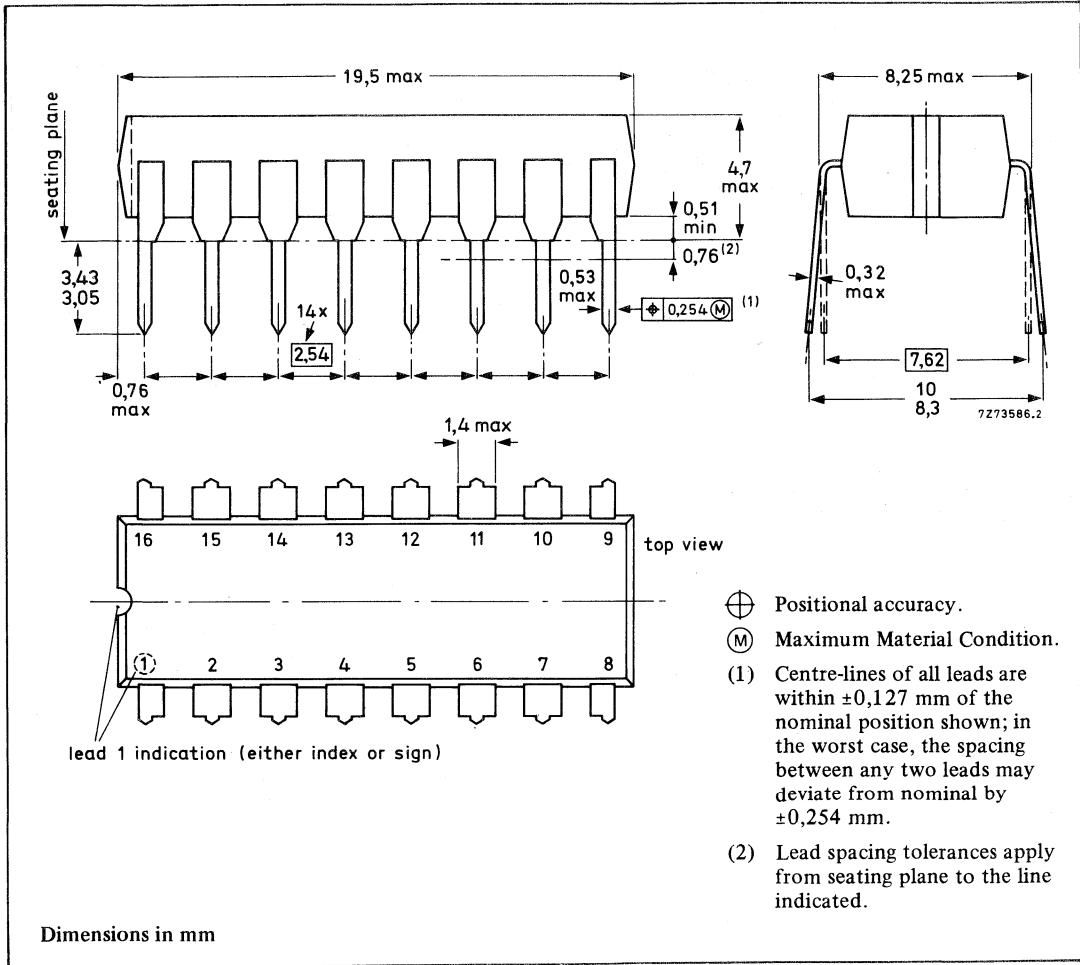



## 16-LEAD QUADRUPLE IN-LINE; PLASTIC (SOT58)

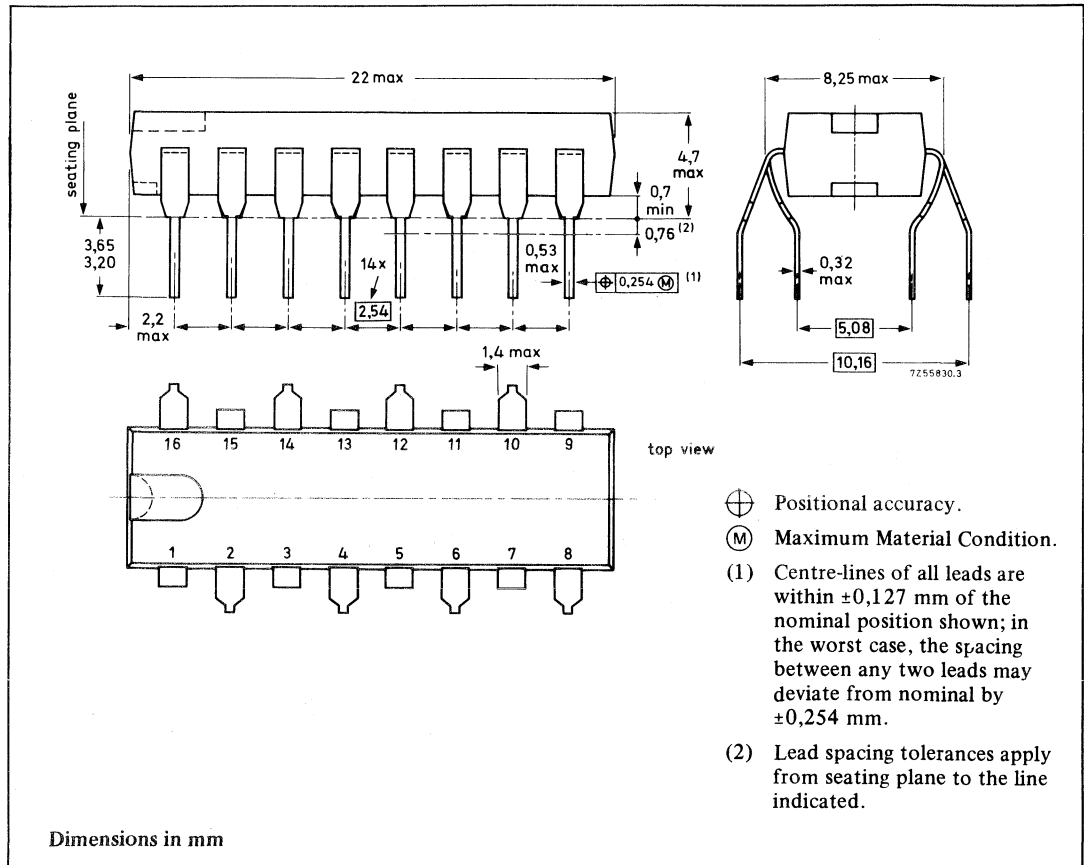

## 8-LEAD MINI-PACK; PLASTIC (SO8; SOT96A)

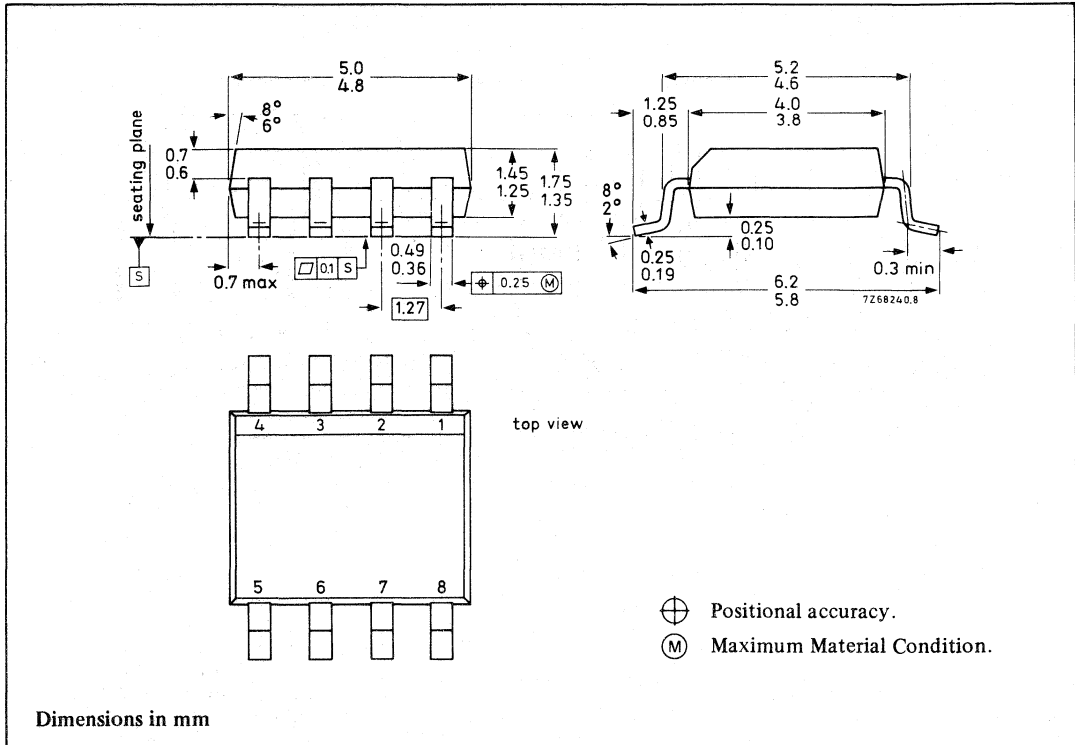

## 8-LEAD DUAL IN-LINE; PLASTIC (SOT97)

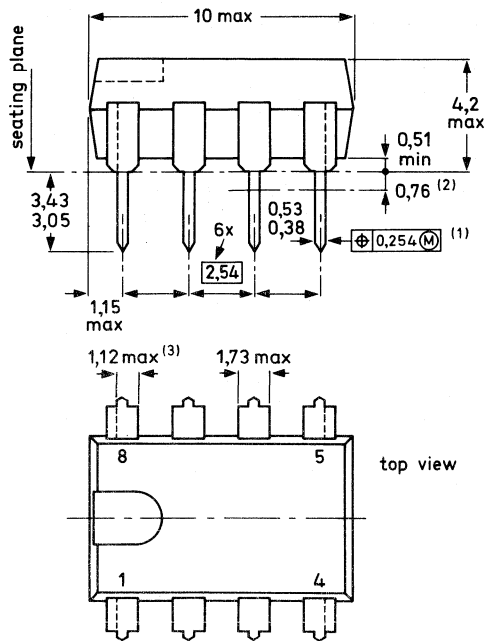


- ⊕ Positional accuracy.
- Ⓜ Maximum Material Condition.

- (1) Centre-lines of all leads are within  $\pm 0,127$  mm of the nominal position shown; in the worst case, the spacing between any two leads may deviate from nominal by  $\pm 0,254$  mm.
- (2) Lead spacing tolerances apply from seating plane to the line indicated.
- (3) Only for devices with asymmetrical end-leads.


Dimensions in mm






## 24-LEAD DUAL IN-LINE ; PLASTIC (SOT101A, B, F, G, L)

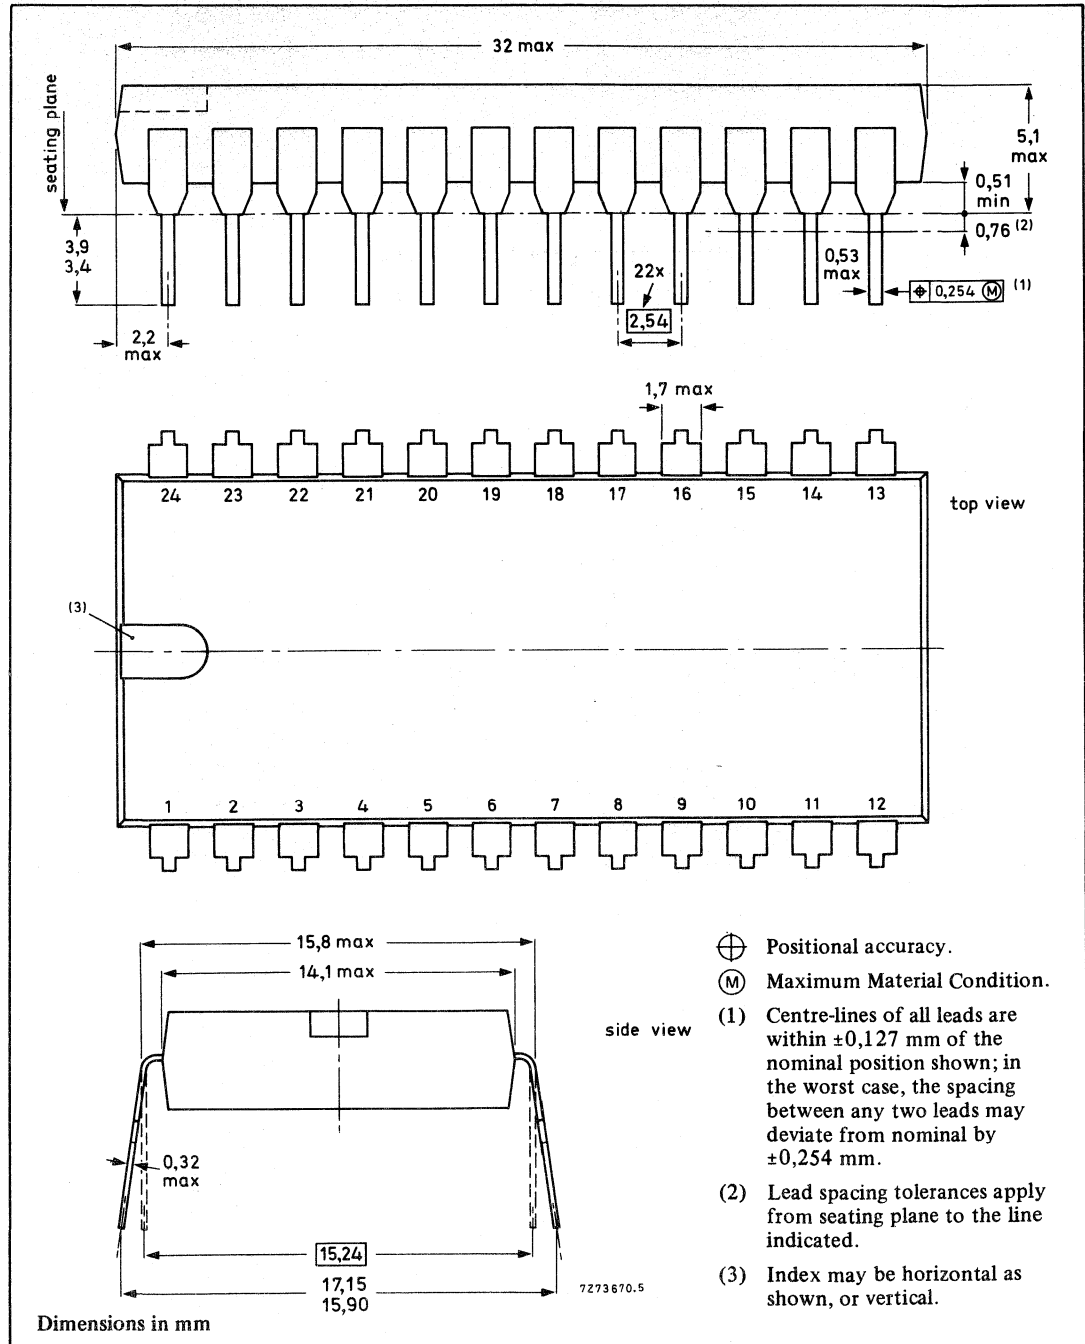

## 24-LEAD DUAL IN-LINE; PLASTIC WITH INTERNAL HEAT SPREADER (SOT101A, B, F, G, L)

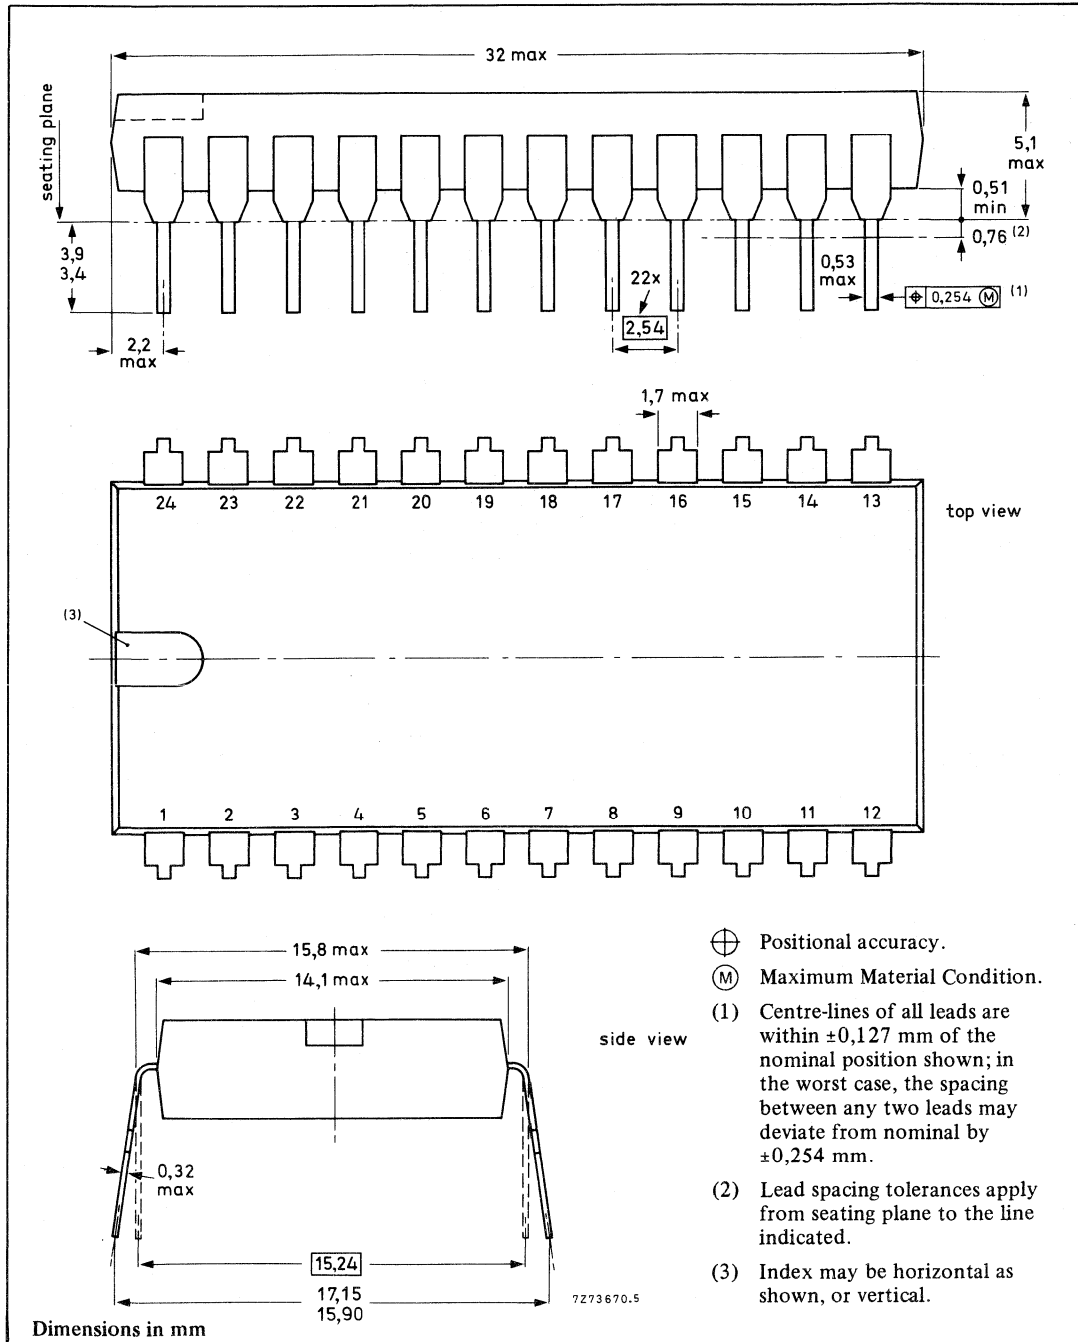

## 18-LEAD DUAL IN-LINE; PLASTIC (SOT102H, K, M, PG, RE)

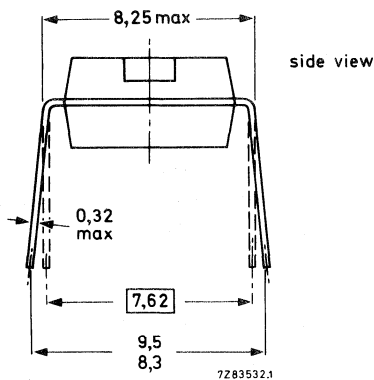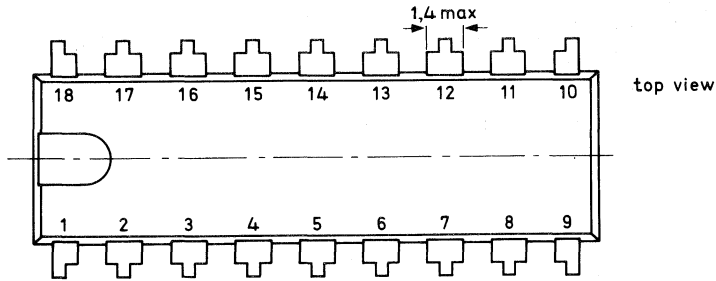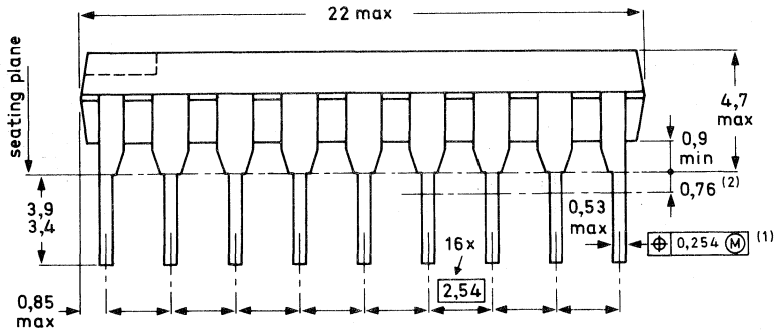


- $\oplus$  Positional accuracy.
- $\textcircled{M}$  Maximum Material Condition.

- (1) Centre-lines of all leads are within  $\pm 0,127$  mm of the nominal position shown; in the worst case, the spacing between any two leads may deviate from nominal by  $\pm 0,254$  mm.
- (2) Lead spacing tolerances apply from seating plane to the line indicated.


Dimensions in mm



## 9-LEAD SINGLE IN-LINE; PLASTIC (SOT110B)

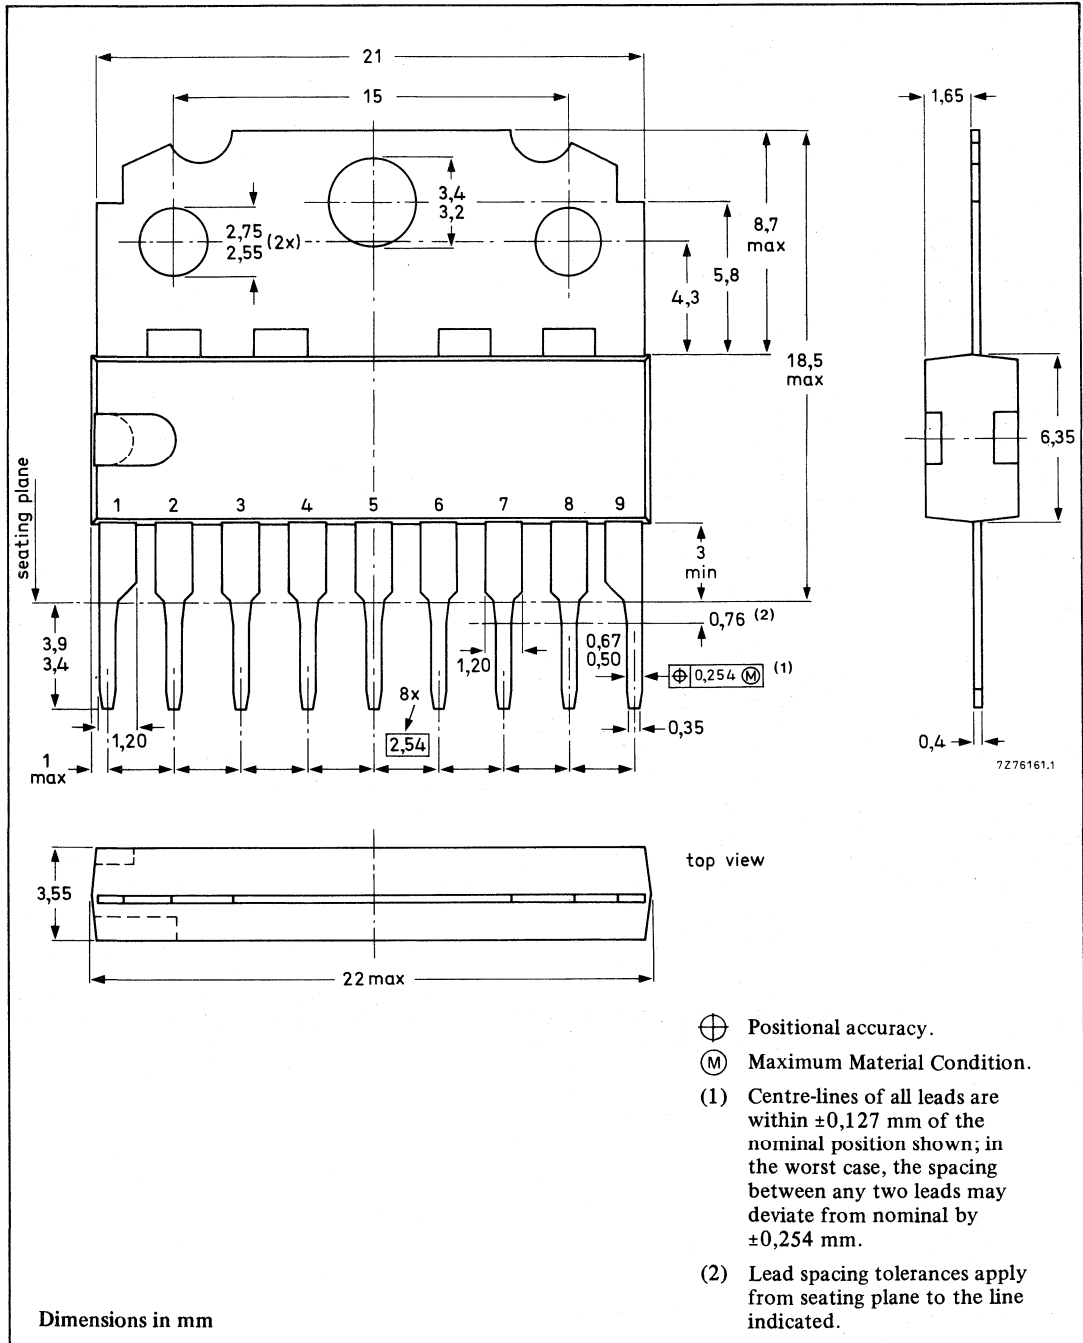


## 28-LEAD DUAL IN-LINE; PLASTIC (SOT117)

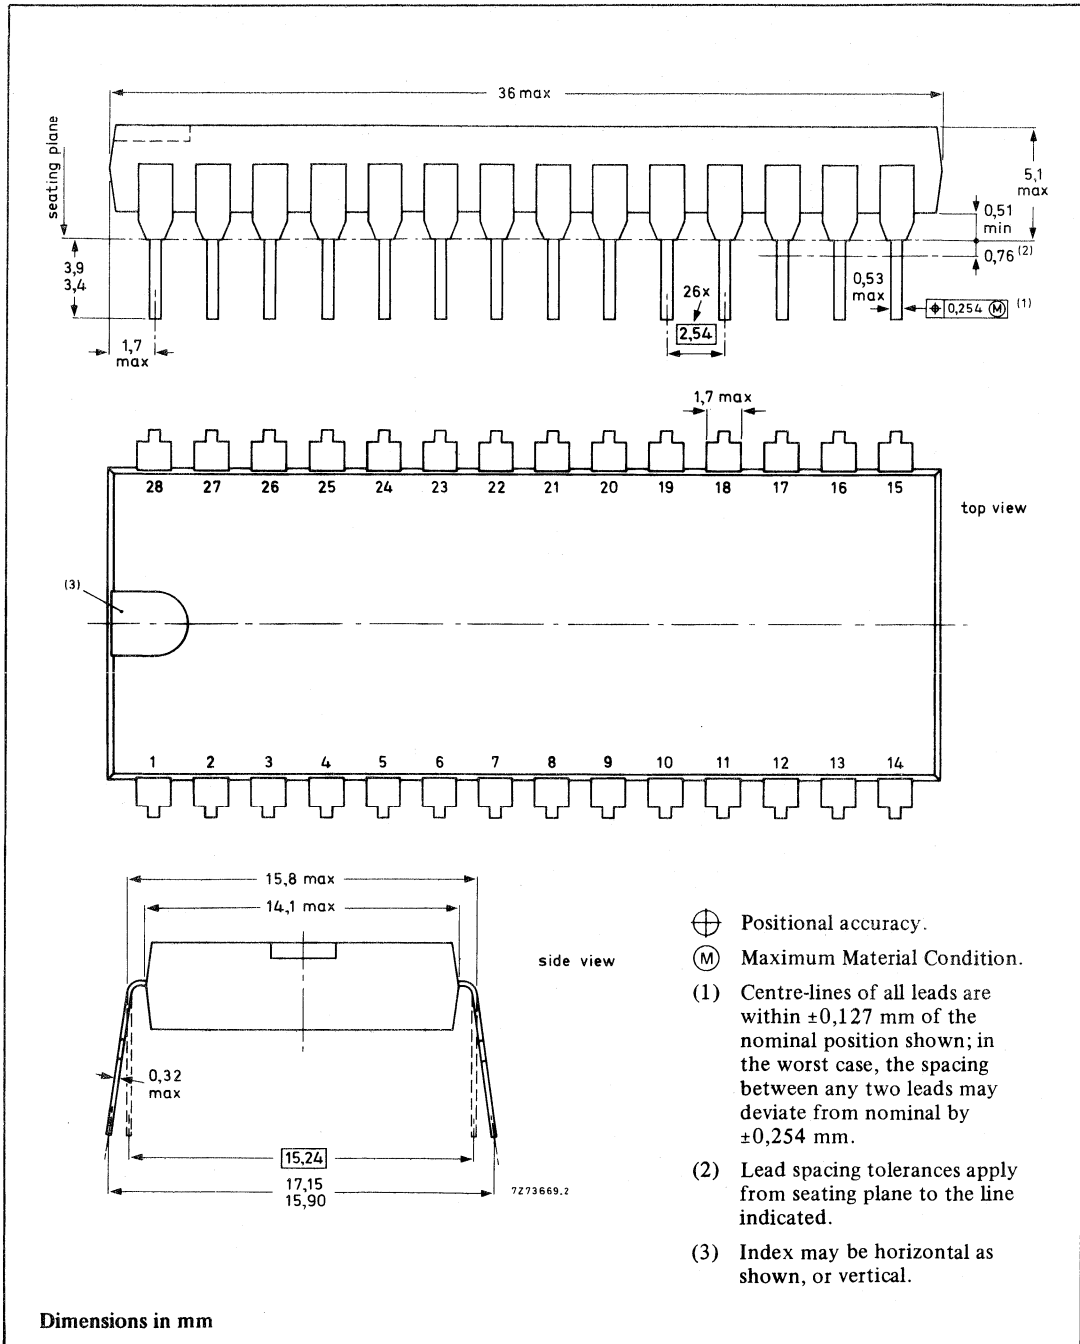




## 9-LEAD SINGLE IN-LINE; PLASTIC POWER (SOT131)

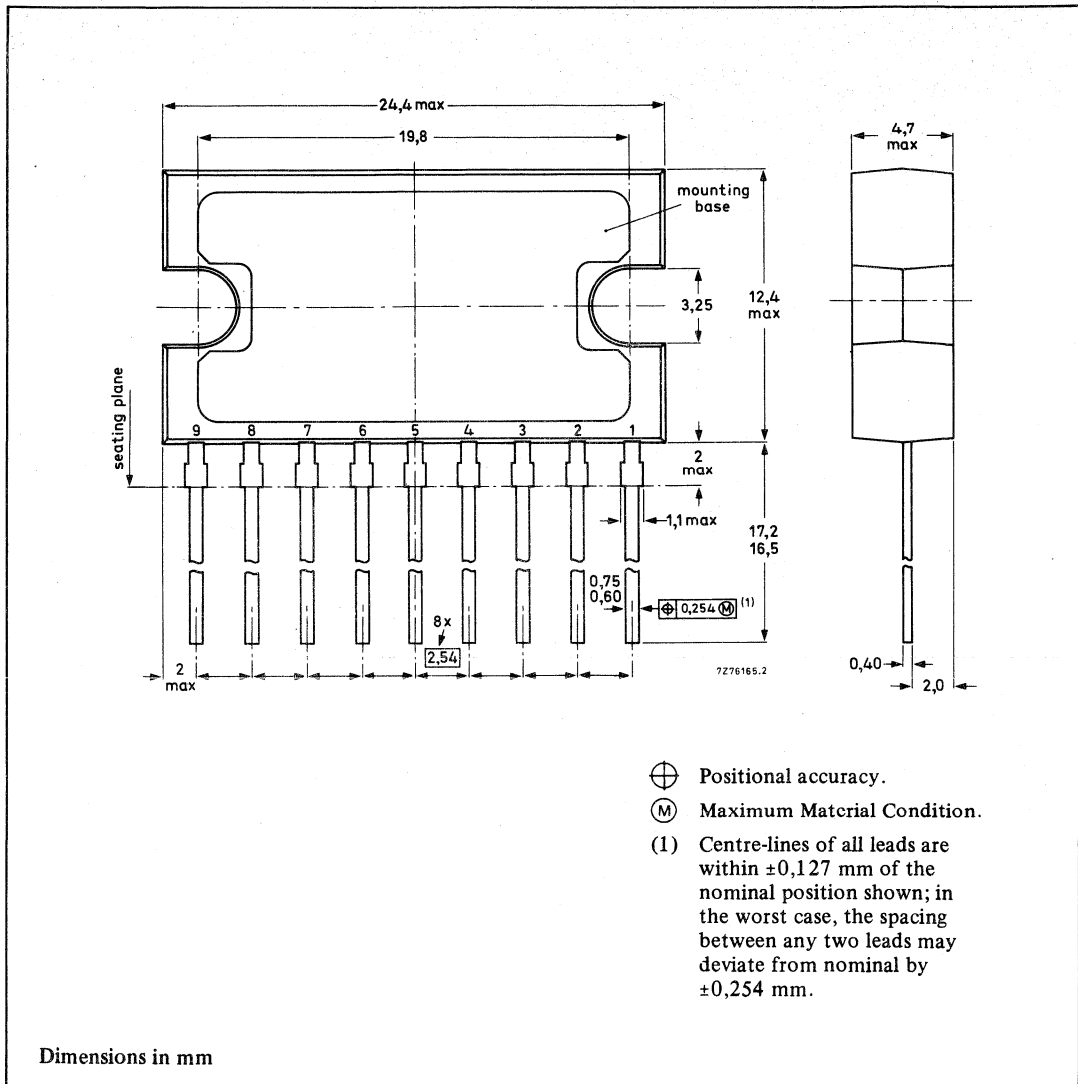





28-LEAD MINI-PACK; PLASTIC (SO28; SOT136A)

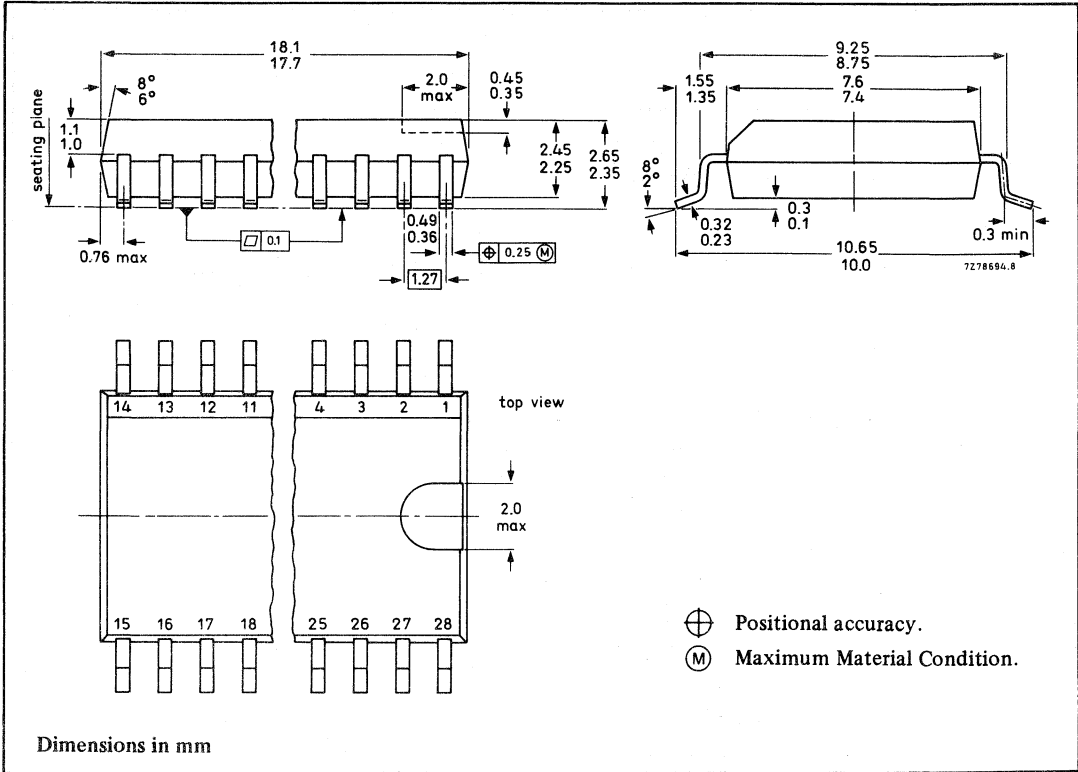


## 24-LEAD MINI-PACK; PLASTIC (SO24; SOT137A)

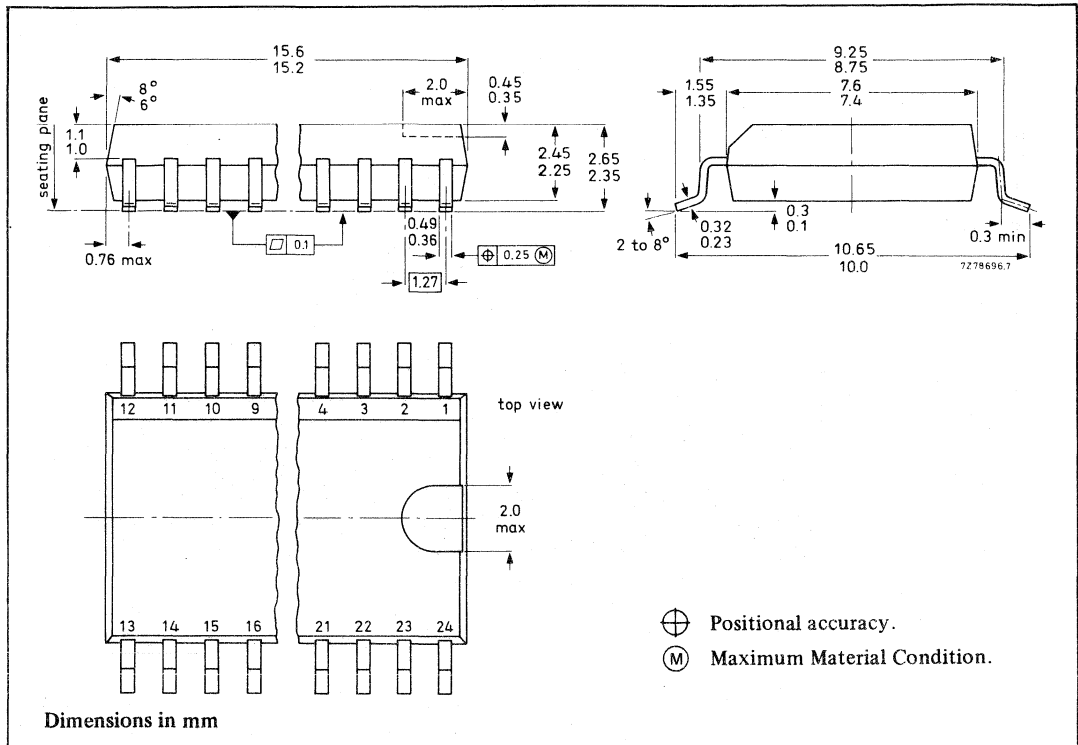

## 13-LEAD SIL-BENT-TO-DIL; PLASTIC POWER (SOT141B,C)



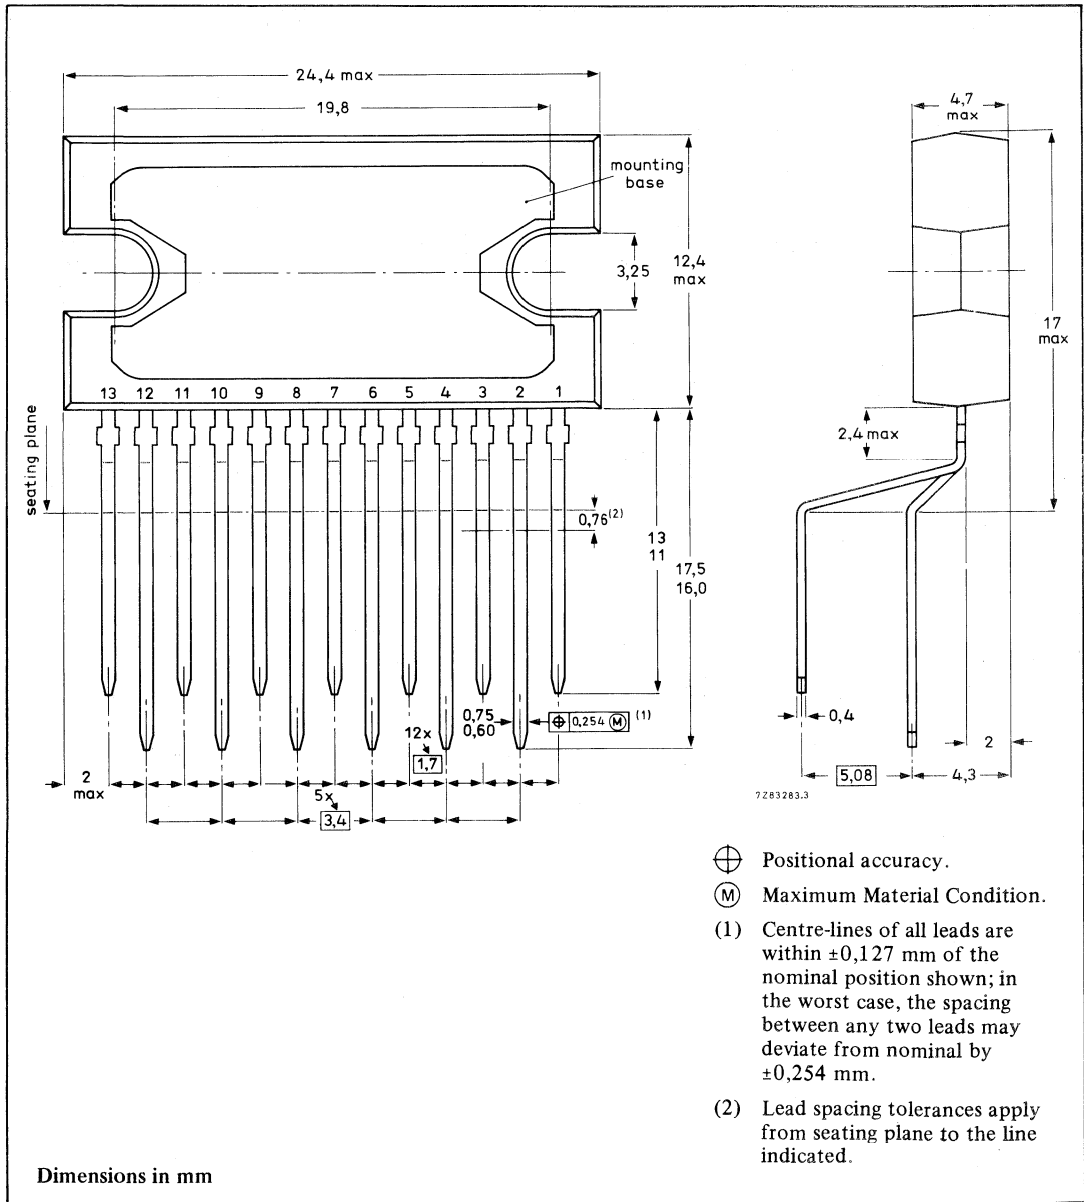


## 9-LEAD SINGLE IN-LINE; PLASTIC (SOT142)

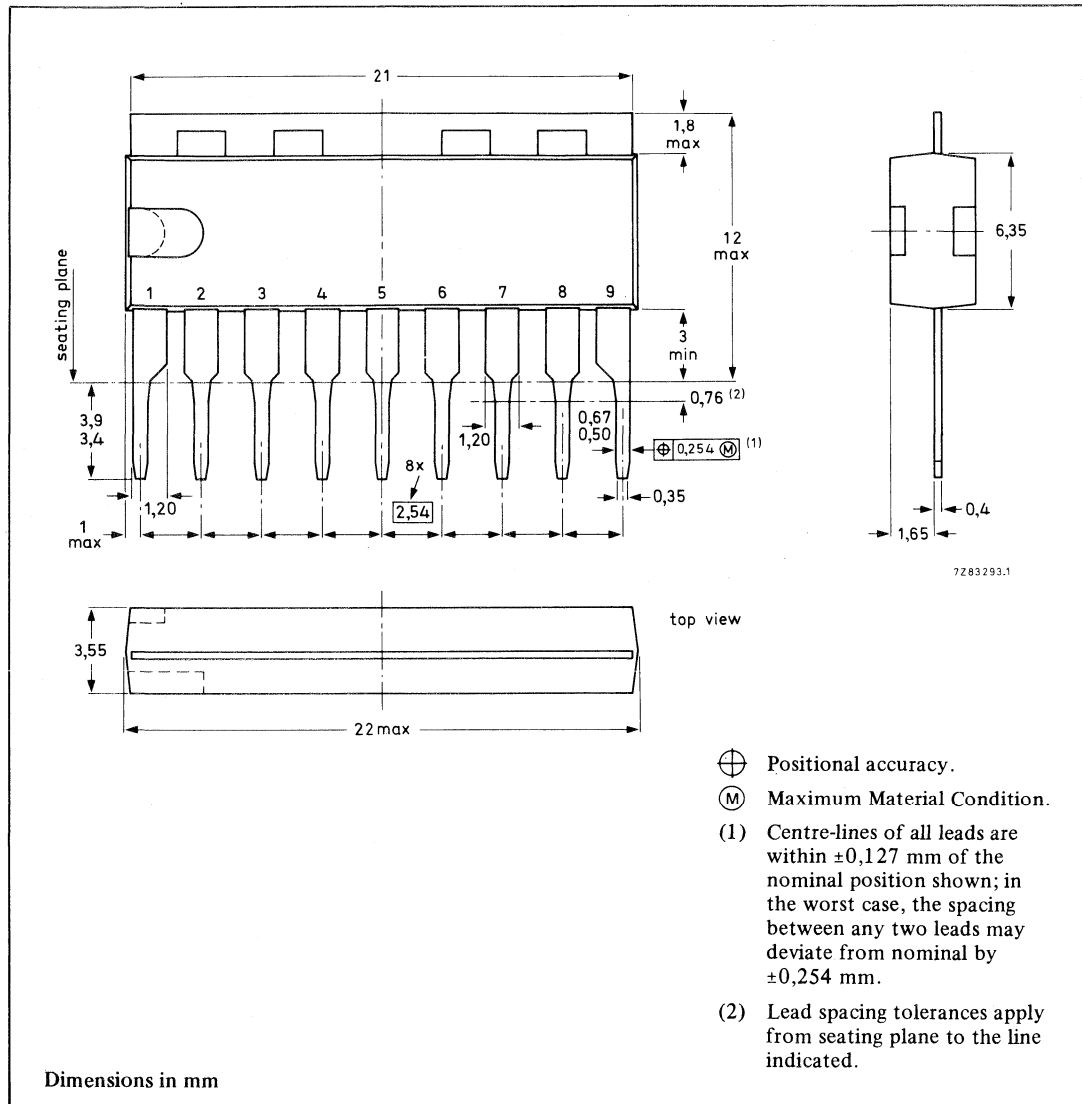

# Package outlines

## 20-LEAD DUAL IN-LINE; PLASTIC (SOT146)

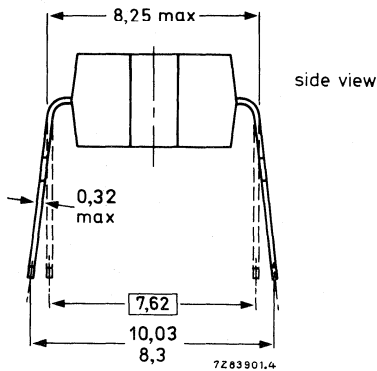
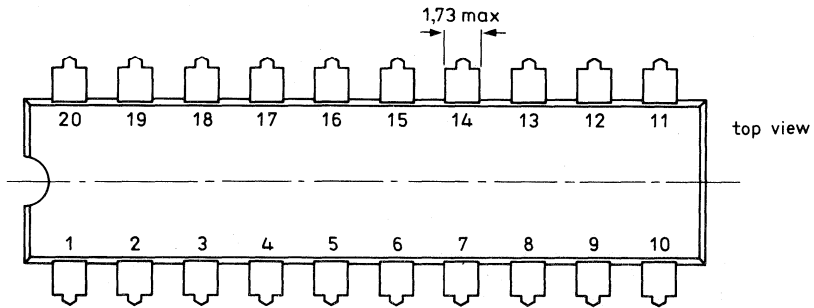
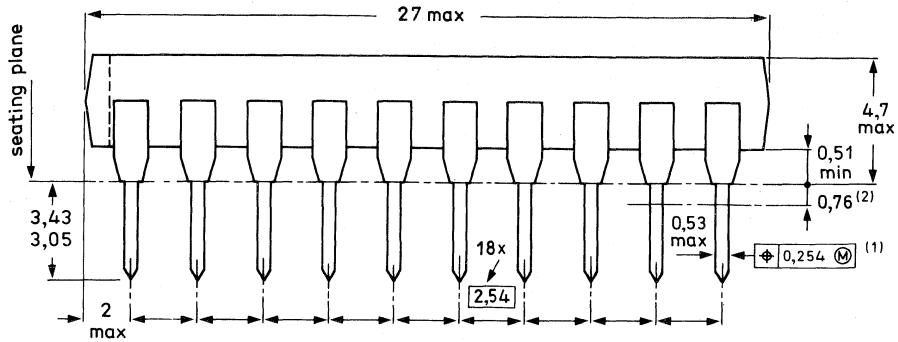


- $\oplus$  Positional accuracy.
- $\textcircled{M}$  Maximum Material Condition.

- (1) Centre-lines of all leads are within  $\pm 0.127$  mm of the nominal position shown; in the worst case, the spacing between any two leads may deviate from nominal by  $\pm 0.254$  mm.
- (2) Lead spacing tolerances apply from seating plane to the line indicated.

Dimensions in mm

## 20-LEAD DUAL IN-LINE; PLASTIC WITH INTERNAL HEAT SPREADER (SOT146EE7)

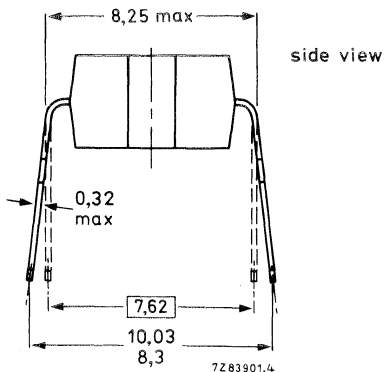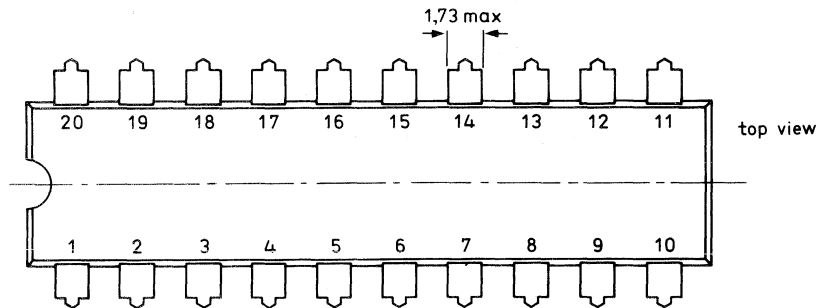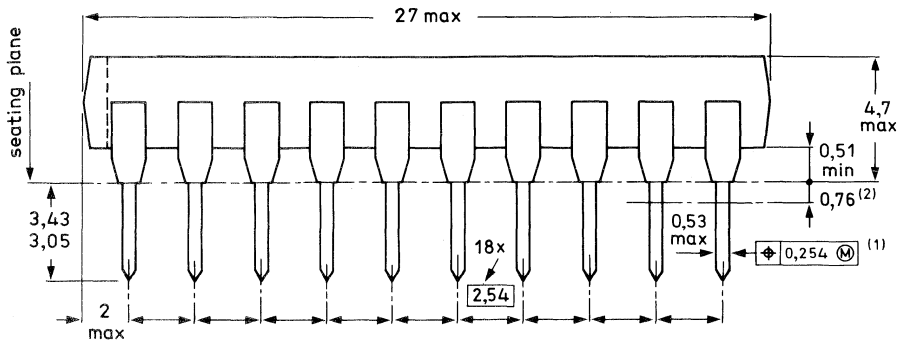


- ⊕ Positional accuracy.
- Ⓜ Maximum Material Condition.


- (1) Centre-lines of all leads are within  $\pm 0,127$  mm of the nominal position shown; in the worst case, the spacing between any two leads may deviate from nominal by  $\pm 0,254$  mm.
- (2) Lead spacing tolerances apply from seating plane to the line indicated.

Dimensions in mm

## 12-LEAD DUAL IN-LINE; PLASTIC WITH METAL COOLING FIN (SOT150)

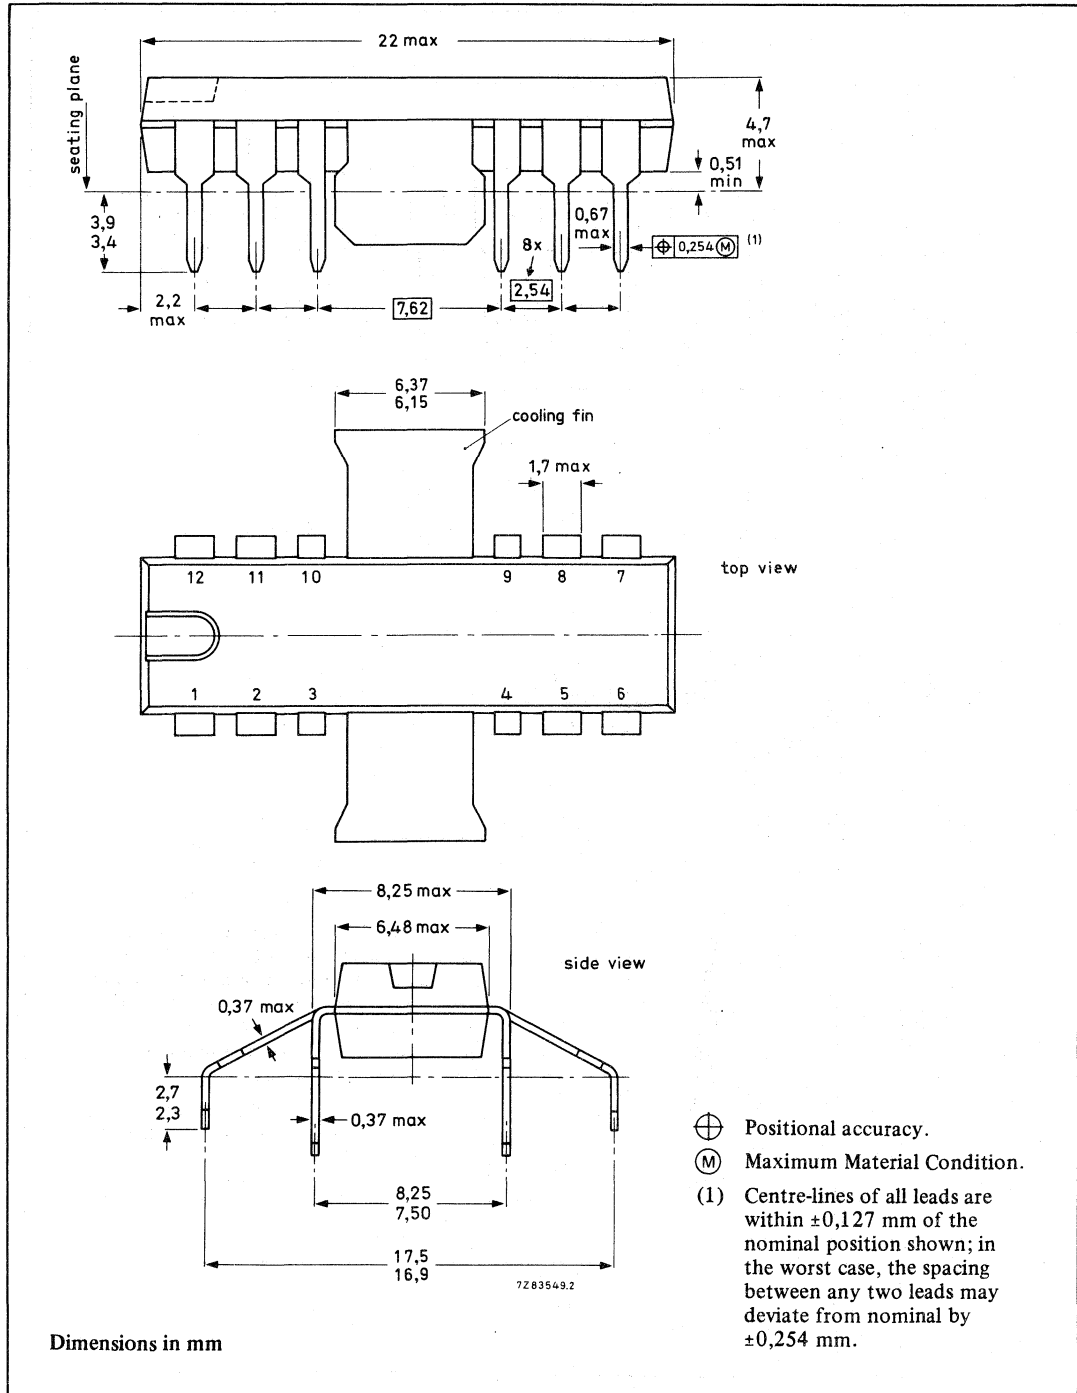


## 9-LEAD SIL-BENT-TO-DIL; PLASTIC POWER (SOT157)



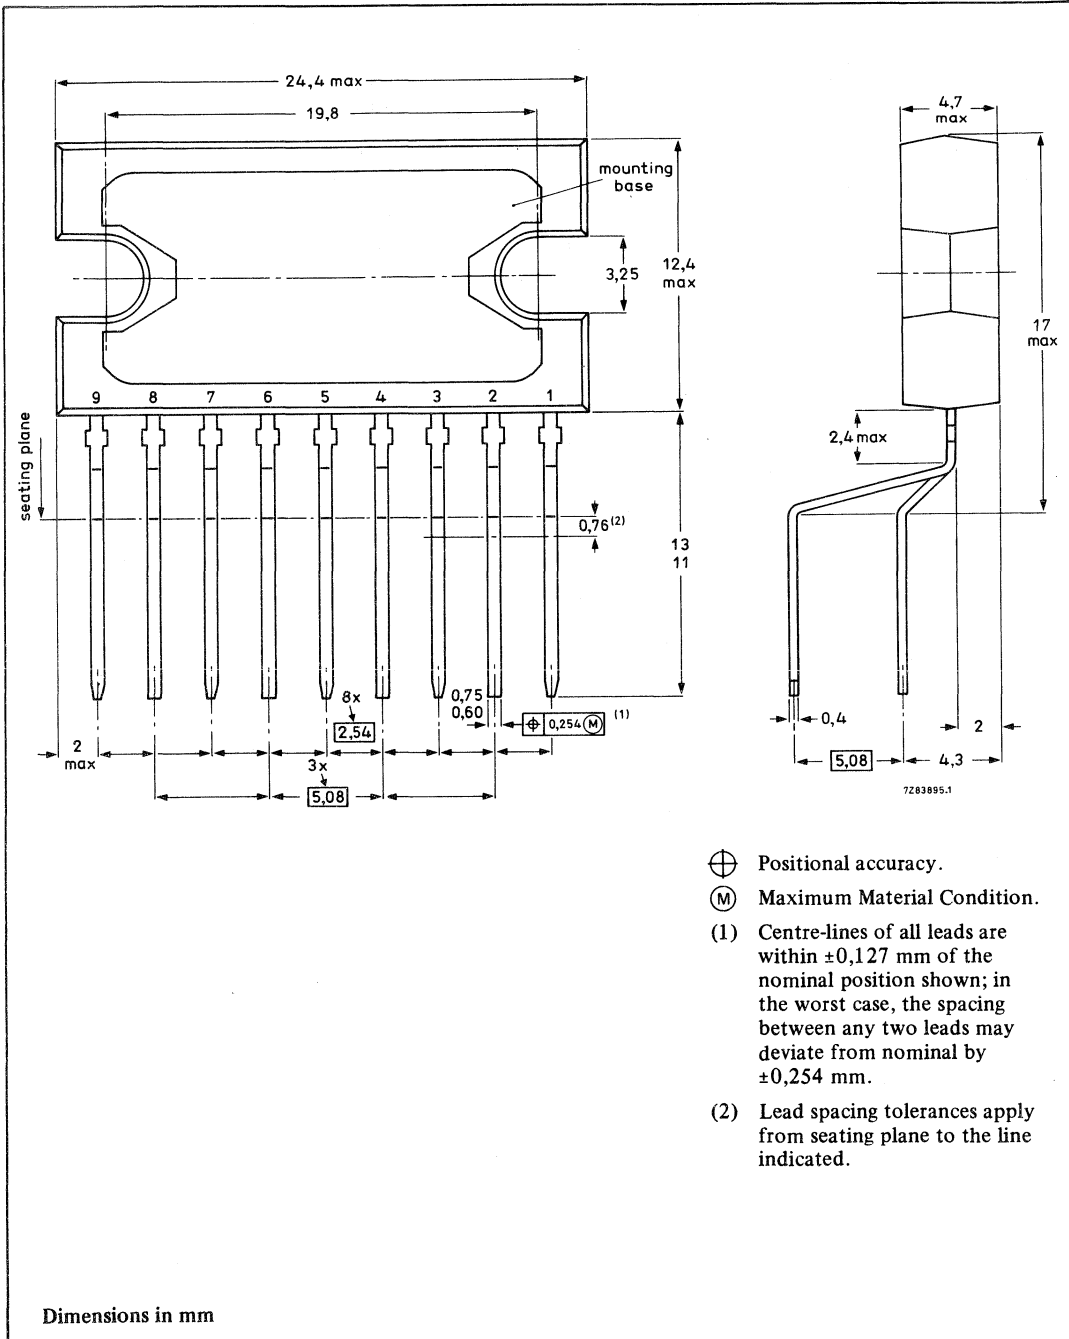




## 40-LEAD MINI-PACK; PLASTIC (VSO40; SOT158A)

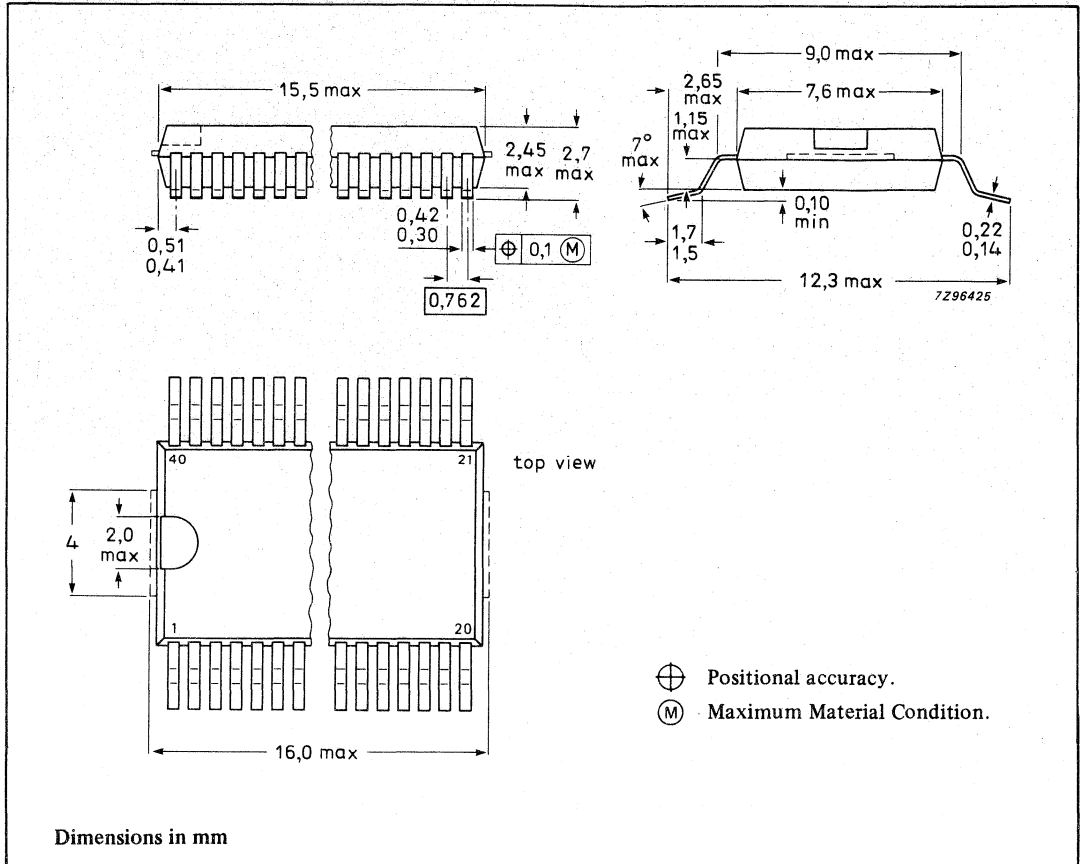




## 16-LEAD MINI-PACK; PLASTIC (SO16L; SOT162A)

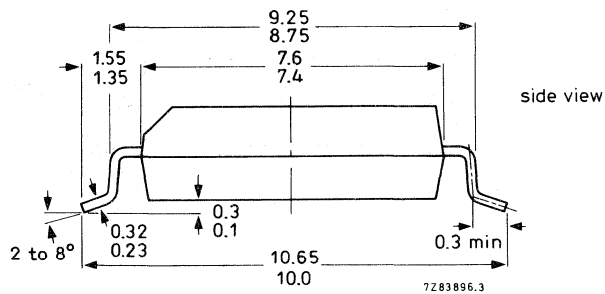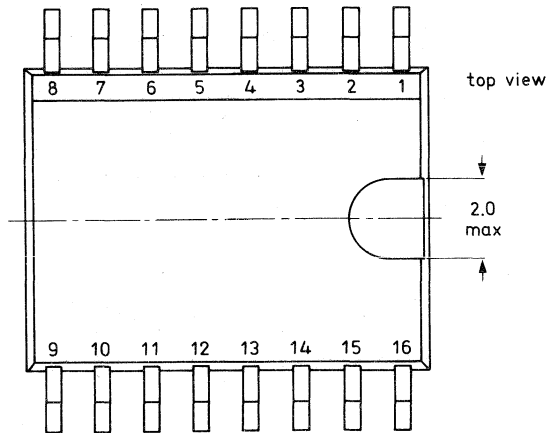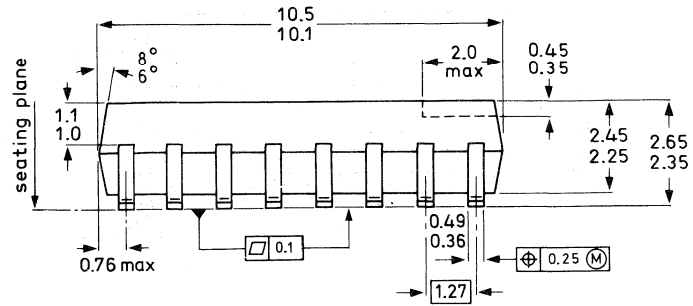

Dimensions in mm

⊕ Positional accuracy.  
 (M) Maximum Material Condition.


## 20-LEAD MINI-PACK; PLASTIC (SO20; SOT163A)

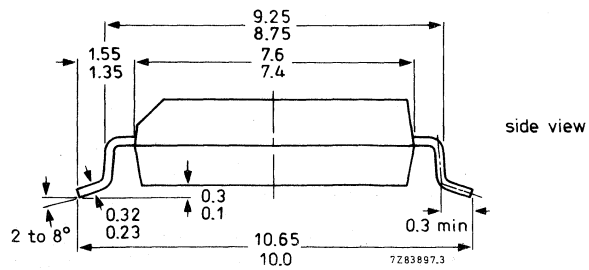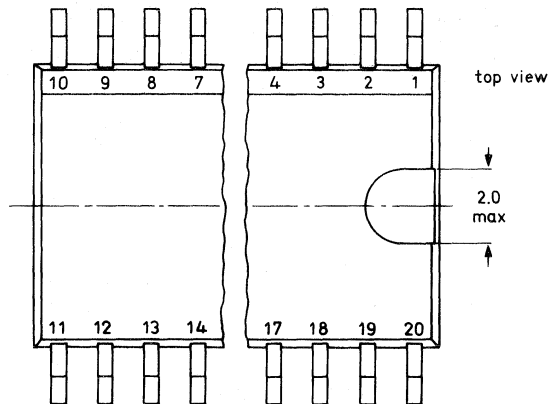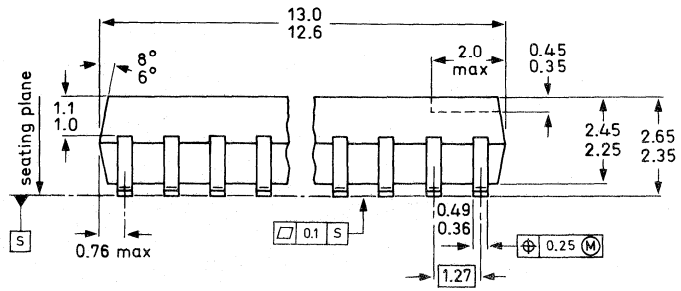


Dimensions in mm

⊕ Positional accuracy.  
 (M) Maximum Material Condition.


## 8-LEAD MINI-PACK; PLASTIC (SO8L; SOT176)

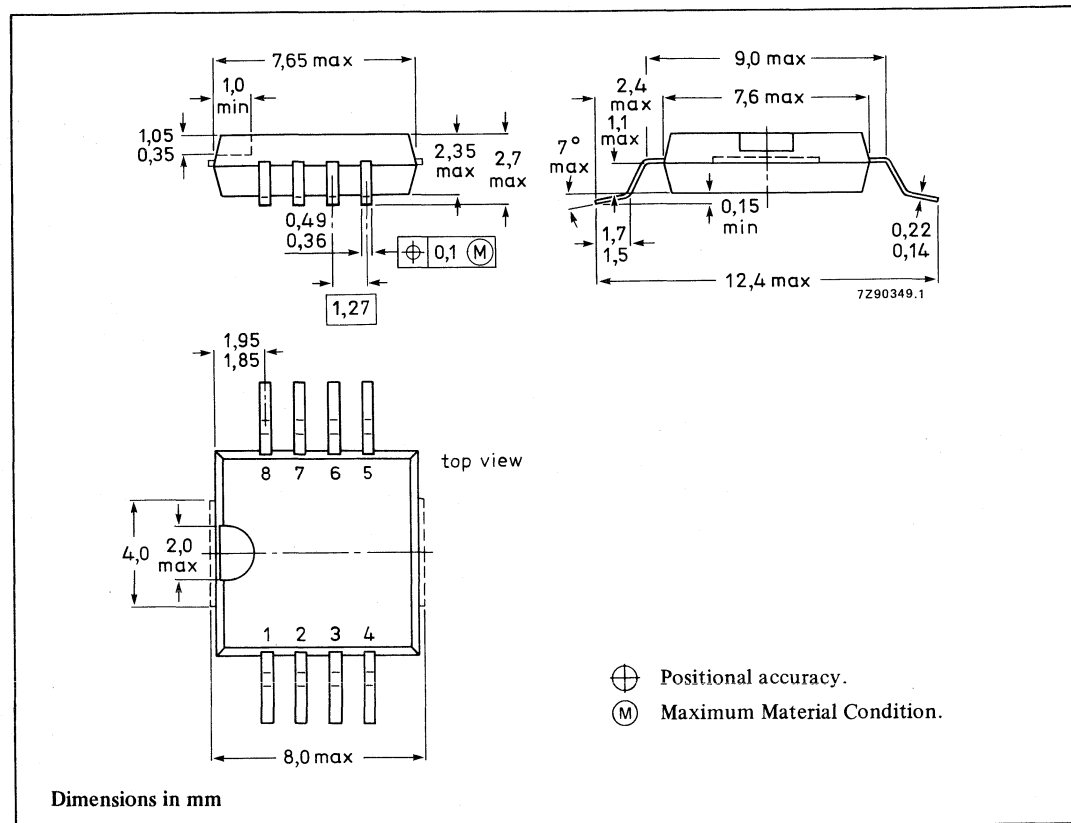

## 44-LEAD PLASTIC LEADED CHIP CARRIER (PLCC) (SOT187)

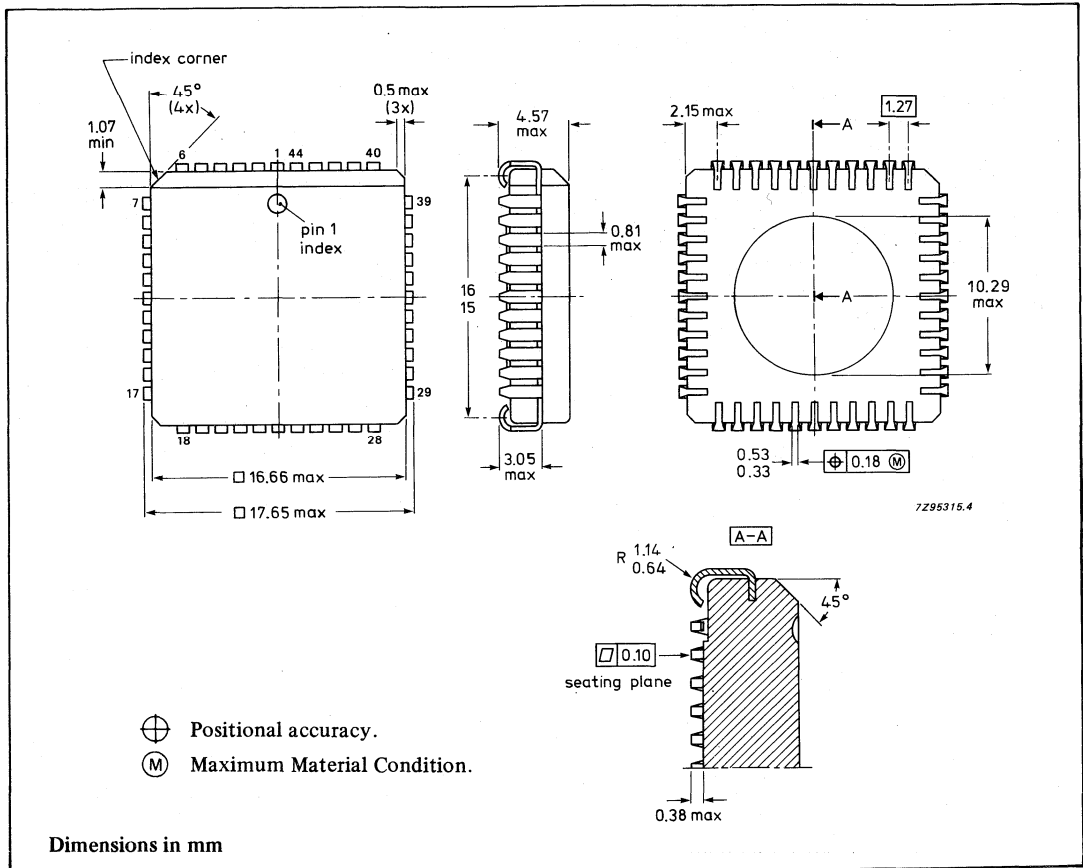


## 68-LEAD PLASTIC LEADED CHIP CARRIER (PLCC) (SOT188)

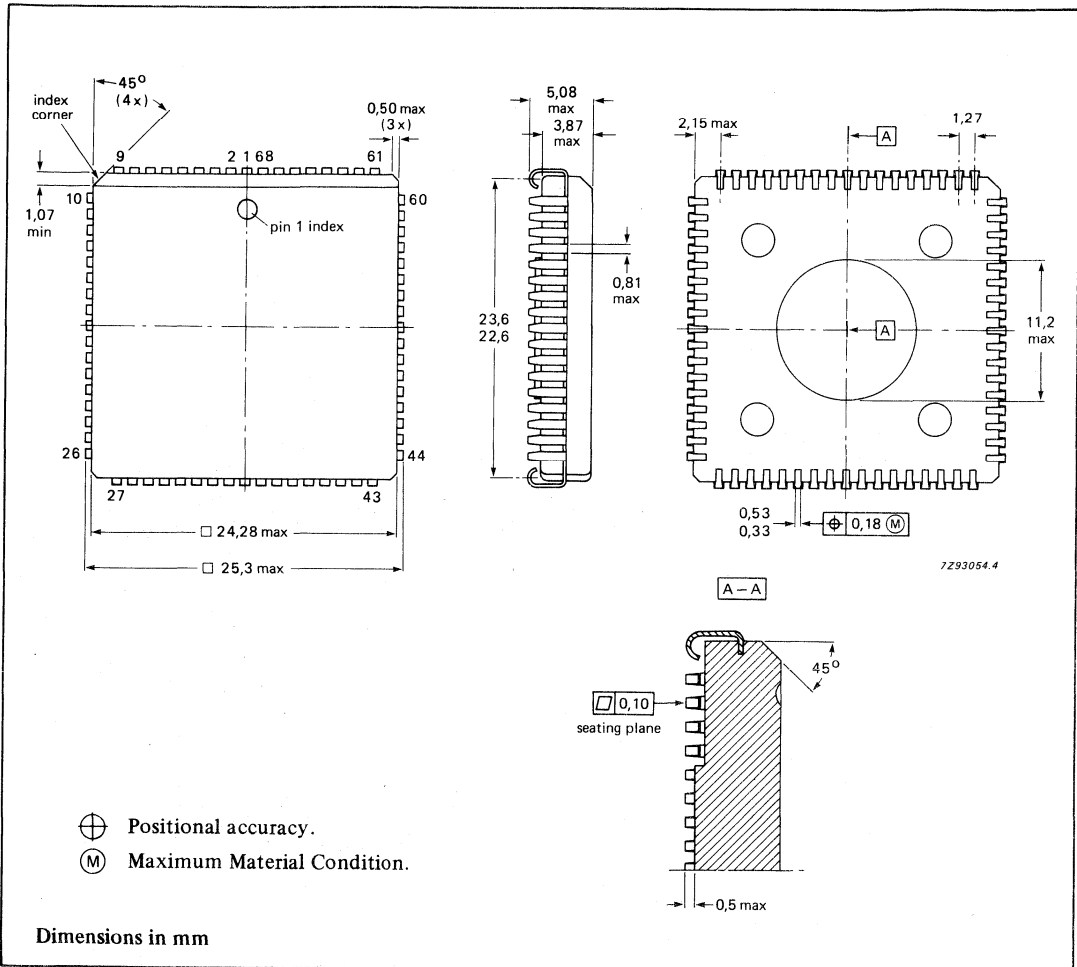


# Package outlines

## 56-LEAD MINI-PACK; PLASTIC (VSO56; SOT190)

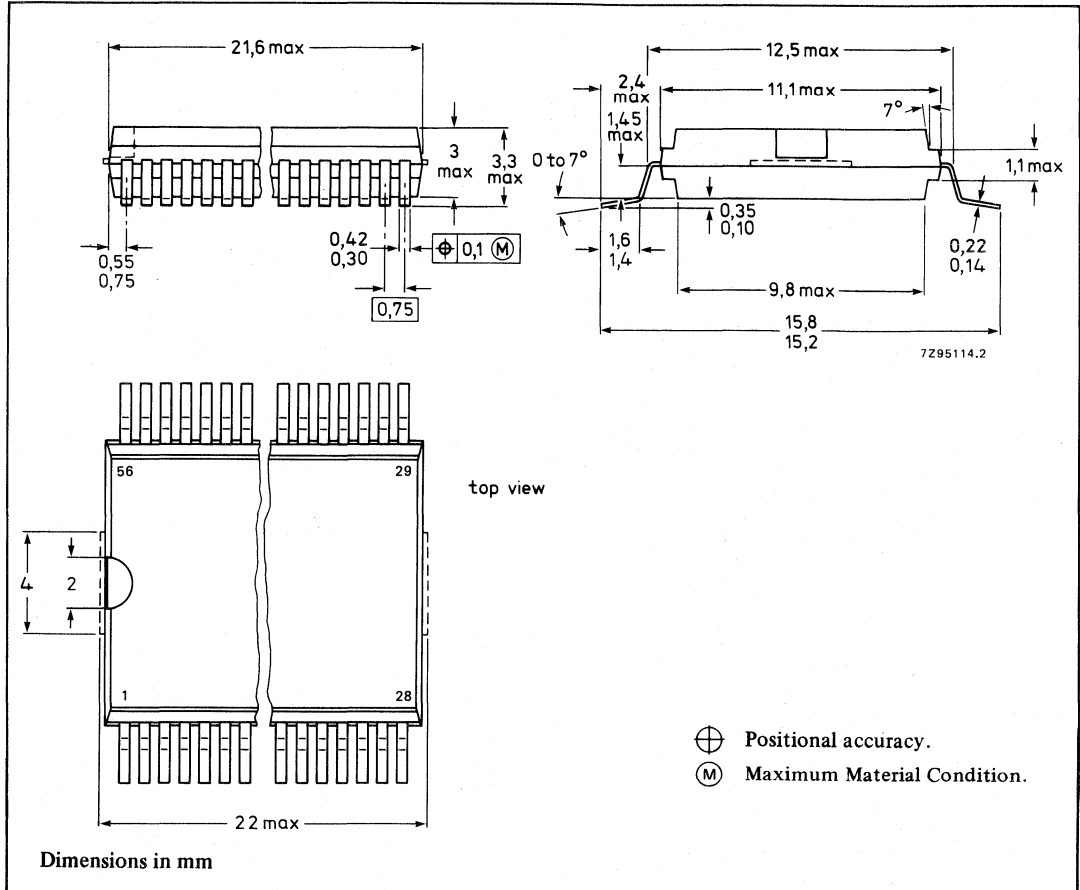

## 44-LEAD QUAD FLAT-PACK; PLASTIC (SOT205A)

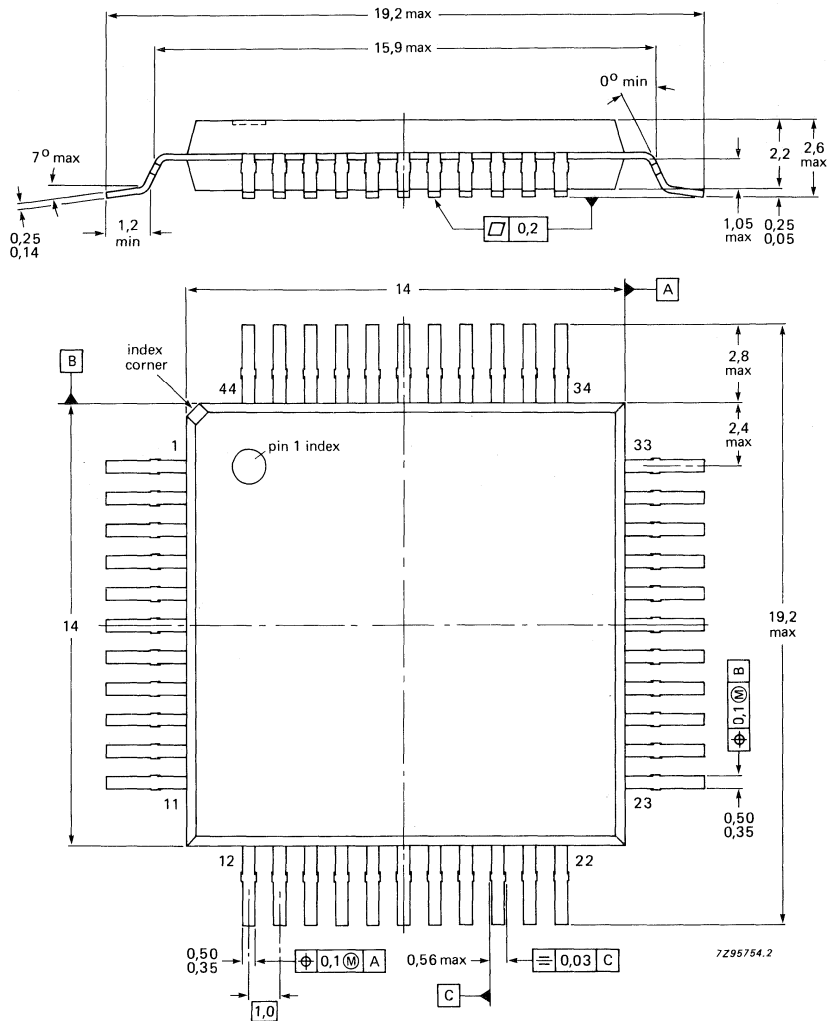

Dimensions in mm



**SOLDERING**



## SOLDERING PLASTIC MINI-PACKS

### 1. By hand-held soldering iron or pulse-heated solder tool

Fix the component by first soldering two, diagonally opposite end leads. Apply the heating tool to the flat part of the lead only. Contact time must be limited to 10 seconds at up to 300 °C. When using proper tools, all other leads can be soldered in one operation within 2 to 5 seconds at between 270 and 320 °C. (Pulse-heated soldering is not recommended for SO packages).

For pulse-heated solder tool (resistance) soldering of VSO packages, solder is applied to substrate by dipping or by an extra thick tin/lead plating before package placement.

### 2. By wave

During placement and before soldering, the component must be fixed with a droplet of adhesive. After curing the adhesive, the component can be soldered. The adhesive can be applied by screen printing, pin transfer or syringe dispensing.

Maximum permissible solder temperature is 260 °C, and maximum duration of package immersion in solder bath is 10 seconds, if allowed to cool to less than 150 °C within 6 seconds. Typical dwell time is 4 seconds at 250 °C.

### 3. By solder paste reflow

Reflow soldering requires the solder paste (a suspension of fine solder particles, flux and binding agent) to be applied to the substrate by screen printing, stencilling or pressure-syringe dispensing before device placement.

Several techniques exist for reflowing, for example, thermal conduction by heated belt, infrared, and vapour-phase reflow. Dwell times vary between 50 and 300 seconds according to method. Typical reflow temperatures range from 215 to 250 °C.

Pre-heating is necessary to dry paste and evaporate binding agent.

Pre-heating duration: 45 minutes at 45 °C.

### 4. Repairing soldered joints

The same precaution and limits apply as in (1) above.

## SOLDERING PLASTIC DUAL IN-LINE PACKAGES

### 1. By hand

Apply the soldering iron below the seating plane (or not more than 2 mm above it). If its temperature is below 300 °C it must not be in contact for more than 10 seconds; if between 300 and 400 °C, for not more than 5 seconds.

### 2. By dip or wave

The maximum permissible temperature of the solder is 260 °C; this temperature must not be in contact with the joint for more than 5 seconds. The total contact time of successive solder waves must not exceed 5 seconds.

The device may be mounted up to the seating plane, but the temperature of the plastic body must not exceed the specified storage maximum. If the printed-circuit board has been pre-heated, forced cooling may be necessary immediately after soldering to keep the temperature within the permissible limit.

### 3. Repairing soldered joints

The same precautions and limits apply as in (1) above.



**DATA HANDBOOK SYSTEM**



## DATA HANDBOOK SYSTEM

Our Data Handbook System comprises more than 60 books with specifications on electronic components, subassemblies and materials. It is made up of four series of handbooks:

ELECTRON TUBES	BLUE
SEMICONDUCTORS	RED
INTEGRATED CIRCUITS	PURPLE
COMPONENTS AND MATERIALS	GREEN

The contents of each series are listed on pages iv to vii.

The data handbooks contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

When ratings or specifications differ from those published in the preceding edition they are indicated with arrows in the page margin. Where application information is given it is advisory and does not form part of the product specification.

Condensed data on the preferred products of Philips Electronic Components and Materials Division is given in our Preferred Type Range catalogue (issued annually).

Information on current Data Handbooks and on how to obtain a subscription for future issues is available from any of the Organizations listed on the back cover.

Product specialists are at your service and enquiries will be answered promptly.

## ELECTRON TUBES (BLUE SERIES)

The blue series of data handbooks comprises:

- T1**      **Tubes for r.f. heating**
- T2a**     **Transmitting tubes for communications, glass types**
- T2b**     **Transmitting tubes for communications, ceramic types**
- T3**      **Klystrons**
- T4**      **Magnetrons for microwave heating**
- T5**      **Cathode-ray tubes**  
Instrument tubes, monitor and display tubes, C.R. tubes for special applications
- T6**      **Geiger-Müller tubes**
- T8**      **Colour display systems**  
Colour TV picture tubes, colour data graphic display tube assemblies, deflection units
- T9**      **Photo and electron multipliers**
- T10**     **Plumbicon camera tubes and accessories**
- T11**     **Microwave semiconductors and components**
- T12**     **Vidicon and Newvicon camera tubes**
- T13**     **Image intensifiers and infrared detectors**
- T15**     **Dry reed switches**
- T16**     **Monochrome tubes and deflection units**  
Black and white TV picture tubes, monochrome data graphic display tubes, deflection units



## SEMICONDUCTORS (RED SERIES)

The red series of data handbooks comprises:

- S1 Diodes**  
Small-signal silicon diodes, voltage regulator diodes (< 1,5 W), voltage reference diodes, tuner diodes, rectifier diodes
- S2a Power diodes**
- S2b Thyristors and triacs**
- S3 Small-signal transistors**
- S4a Low-frequency power transistors and hybrid modules**
- S4b High-voltage and switching power transistors**
- S5 Field-effect transistors**
- S6 R.F. power transistors and modules**
- S7 Surface mounted semiconductors**
- S8a Light-emitting diodes**
- S8b Devices for optoelectronics**  
Optocouplers, photosensitive diodes and transistors, infrared light-emitting diodes and infrared sensitive devices, laser and fibre-optic components
- S9 PowerMos transistors**
- S10 Wideband transistors and wideband hybrid IC modules**
- S11 Microwave transistors**
- S12 Surface acoustic wave devices**
- S13 Semiconductor sensors**
- S14 Liquid Crystal Displays**

## INTEGRATED CIRCUITS (PURPLE SERIES)

The purple series of handbooks comprises:

<b>IC01</b>	<b>Radio, audio and associated systems</b> Bipolar, MOS	
<b>IC02a/b</b>	<b>Video and associated systems</b> Bipolar, MOS	
<b>IC03</b>	<b>Integrated circuits for telephony</b> Bipolar, MOS	
<b>IC04</b>	<b>HE4000B logic family</b> CMOS	
<b>IC05N</b>	<b>HE4000B logic family – uncased ICs</b> CMOS	
<b>IC06N</b>	<b>High-speed CMOS; PC74HC/HCT/HCU</b> Logic family	
<b>IC08</b>	<b>ECL 10K and 100K logic families</b>	
<b>IC09N</b>	<b>TTL logic series</b>	
<b>IC10</b>	<b>Memories</b> MOS, TTL, ECL	
<b>IC11</b>	<b>Linear Products</b>	
<b>IC12</b>	<b>I<sup>2</sup>C-bus compatible ICs</b>	
<b>IC13</b>	<b>Semi-custom</b> Programmable Logic Devices (PLD)	
<b>IC14</b>	<b>Microcontrollers and peripherals</b> Bipolar, MOS	
<b>IC15</b>	<b>FAST TTL logic series</b>	
<b>IC16</b>	<b>CMOS integrated circuits for clocks and watches</b>	
<b>IC17</b>	<b>Integrated Services Digital Networks (ISDN)</b>	not yet issued
<b>IC18</b>	<b>Microprocessors and peripherals</b>	

## COMPONENTS AND MATERIALS (GREEN SERIES)

The green series of data handbooks comprises:

- C2** Television tuners, coaxial aerial input assemblies
- C3** Loudspeakers
- C4** Ferroxcube potcores, square cores and cross cores
- C5** Ferroxcube for power, audio/video and accelerators
- C6** Synchronous motors and gearboxes
- C7** Variable capacitors
- C8** Variable mains transformers
- C9** Piezoelectric quartz devices
- C11** Varistors, thermistors and sensors
- C12** Potentiometers, encoders and switches
- C13** Fixed resistors
- C14** Electrolytic and solid capacitors
- C15** Ceramic capacitors
- C16** Permanent magnet materials
- C17** Stepping motors and associated electronics
- C18** Direct current motors
- C19** Piezoelectric ceramics
- C20** Wire-wound components for TVs and monitors
- C22** Film capacitors





# Electronic components and materials for professional, industrial and consumer uses from the world-wide Philips Group of Companies

- Argentina:** PHILIPS ARGENTINA S.A., Div. Elcoma, Vedia 3892, 1430 BUENOS AIRES, Tel. (01) 541 - 7141 to 7747.
- Australia:** PHILIPS INDUSTRIES LTD., Elcoma Division, 11 Waltham Street, ARTARMON, N.S.W. 2064, Tel. (02) 439 3322.
- Austria:** ÖSTERREICHISCHE PHILIPS INDUSTRIE G.m.b.H., UB Bauelemente, Triester Str. 64, 1101 WIEN, Tel. (0222) 60 101-820.
- Belgium:** N.V. PHILIPS PROF. SYSTEMS – Elcoma Div., 80 Rue Des Deux Gares, B-1070 BRUXELLES, Tel. (02) 52 56 111.
- Brazil:** CONSTANTA-IBRAPE; (Active Devices); Av. Brigadeiro Faria Lima, 1735-SAO PAULO-SP, Tel. (011) 211-2600.  
CONSTANTA-IBRAPE; (Passive Devices & Materials); Av. Francisco Monteiro, 702 – RIBEIRAO PIRES-SP, Tel. (011) 459-8211.
- Canada:** PHILIPS ELECTRONICS LTD., Elcoma Division, 601 Milner Ave., SCARBOROUGH, Ontario, M1B 1M8, Tel. (416) 292-5161.
- Chile:** PHILIPS CHILENA S.A., Av. Santa Maria 0760, SANTIAGO, Tel. (02) 77 38 16.
- Colombia:** IND. PHILIPS DE COLOMBIA S.A., c/o IPRELENZO LTD., Cra. 21, No. 56-17, BOGOTA, D.E., Tel. (01) 249 7624.
- Denmark:** MINIWATT A/S, Strandlodsvej 2, P.O. Box 1919, DK 2300 COPENHAGEN S, Tel. (01) 54 11 33.
- Finland:** OY PHILIPS AB, Elcoma Division, Kaivokatu 8, SF-00100 HELSINKI 10, Tel. (90) 1 72 71.
- France:** RTC-COMPELEC, 117 Quai du Président Roosevelt, 92134 ISSY-LES-MOULINEAUX Cedex, Tel. (01) 40 93 80 00.
- Germany (Fed. Republic):** VALVO, UB Bauelemente der Philips G.m.b.H., Valvo Haus, Burchardstrasse 19, D-2 HAMBURG 1, Tel. (040) 3296-0.
- Greece:** PHILIPS HELLENIQUE S.A., Elcoma Division, No. 15, 25th March Street, GR 17778 TAVROS, Tel. (01) 48 94 339/48 94 911.
- Hong Kong:** PHILIPS HONG KONG LTD., Elcoma Div., 15/F Philips Ind. Bldg., 24-28 Kung Yip St., KWAI CHUNG, Tel. (0)-2451 21.
- India:** PEICO ELECTRONICS & ELECTRICALS LTD., Elcoma Dept., Band Box Building, 254-D Dr Annie Besant Rd., BOMBAY – 400025,  
Tel. (022) 4930311/4930590.
- Indonesia:** PT. PHILIPS-RALIN ELECTRONICS, Elcoma Div., Setiabudi II Building, 6th Fl., Jalan H.R. Rasuna Said (P.O. Box 223/KBY) Kuningan,  
JAKARTA 12910, Tel. (021) 51 79 95.
- Ireland:** PHILIPS ELECTRICAL (IRELAND) LTD., Elcoma Division, Newstead, Clonskeagh, DUBLIN 14, Tel. (01) 69 33 55.
- Italy:** PHILIPS S.p.A., Div. Componenti Elcoma, Piazza IV Novembre 3, I-20124 MILANO, Tel. (02) 6752.1.
- Japan:** NIHON PHILIPS CORP, Shuwa Shinagawa Bldg., 26-33 Takanawa 3-chome, Minato-ku, TOKYO (108), Tel. (03) 448-5611.  
(IC Products) SIGNETICS JAPAN LTD., 8-7 Sanbancho Chiyoda-ku, TOKYO 102, Tel. (03) 230-1521.
- Korea (Republic of):** PHILIPS ELECTRONICS (KOREA) LTD., Elcoma Div., Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,  
Tel. (02) 794-5011.
- Malaysia:** PHILIPS MALAYSIA SDN BHD, Elcoma Div., 345 Jalan Gelugor, 11700 PULAU PINANG, Tel. (04) 87 00 44.
- Mexico:** ELECTRONICA, S.A de C.V., Carr. México-Toluca km. 62.5, TOLUCA, Edo. de México 50140, Tel. Toluca 91 (721) 613-00.
- Netherlands:** PHILIPS NEDERLAND, Marktgroep Elonco, Postbus 90050, 5600 PB EINDHOVEN, Tel. (040) 78 37 49.
- New Zealand:** PHILIPS NEW ZEALAND LTD., Elcoma Division, 110 Mt. Eden Road, C.P.O. Box 1041, AUCKLAND, Tel. (09) 605-914.
- Norway:** NORSK A/S PHILIPS, Electronica Dept., Sandstuveien 70, OSLO 6, Tel. (02) 68 02 00.
- Pakistan:** PHILIPS ELECTRICAL CO. OF PAKISTAN LTD., Philips Markaz, M.A. Jinnah Rd., KARACHI-3, Tel. (021) 72 57 72.
- Peru:** CADESA, Av. Pardo y Aliaga No. 695, 6th Floor, San Isidro, LIMA 27, Tel. (014) 70 70 80.
- Philippines:** PHILIPS INDUSTRIAL DEV. INC., 2246 Pasong Tamo, P.O. Box 911, Makati Comm. Centre, MAKATI-RIZAL 3116, Tel. (02) 86 89 51 to 59.
- Portugal:** PHILIPS PORTUGUESA S.A.R.L., Av. Eng. Duarte Pacheco 6, 1009 LISBOA Codex, Tel. (019) 68 31 21.
- Singapore:** PHILIPS PROJECT DEV. (Singapore) PTE LTD., Elcoma Div., Lorong 1, Toa Payoh, SINGAPORE 1231, Tel. 35 02 0000.
- South Africa:** S.A. PHILIPS (Pty) LTD., EDAC Div., 3rd Floor Rainer House, Upper Railway Rd. & Ove St., New Doornfontein, JOHANNESBURG 2001,  
Tel. (011) 402-46 00/07.
- Spain:** MINIWATT S.A., Balmes 22, 08007 BARCELONA, Tel. (03) 301 63 12.
- Sweden:** PHILIPS KOMPONENTER A.B., Lidingsvägen 50, S-11584 STOCKHOLM, Tel. (08) 78 21 000.
- Switzerland:** PHILIPS A.G., Elcoma Dept., Allmendstrasse 140-142, CH-8027 ZÜRICH, Tel. (01) 488 22 11.
- Taiwan:** PHILIPS TAIWAN LTD., 150 Tun Hua North Road, P.O. Box 22978, TAIPEI, Taiwan, Tel. (02) 71 20 500.
- Thailand:** PHILIPS ELECTRICAL CO. OF THAILAND LTD., 283 Silom Road, P.O. Box 961, BANGKOK, Tel. (02) 233-6330-9.
- Turkey:** TÜRK PHILIPS TICARET A.S., Elcoma Department, İnönü Cad., No. 78-80, 80090 Ayazpasa ISTANBUL, Tel. (01) 143 59 10.
- United Kingdom:** MULLARD LTD., Mullard House, Torrington Place, LONDON WC1E 7HD, Tel. (01) 580 6633.
- United States:** (Active Devices & Materials) AMPEREX SALES CORP., Providence Pike, SLATERSVILLE; R.I. 02876, Tel. (401) 762-9000.  
(Colour picture tubes – Monochrome & Colour display tubes) PHILIPS DISPLAY COMPONENTS, 50 Johnston St., SENECA FALLS, N.Y. 13148,  
Tel. (315) 568-5881.  
(IC Products) SIGNETICS CORPORATION, 811 East Arques Avenue, SUNNYVALE, CA 94088-3409, Tel. (408) 991-2000.  
(Passive & Electromech. Dev.) MEPCO/CENTRALAB, INC., 2001 West Blue Heron Blvd, RIVIERA BEACH, Florida 33404, Tel. (305) 881-3200.
- Uruguay:** LUZILECTRON S.A., Avda Uruguay 1287, P.O. Box 907, MONTEVIDEO, Tel. (02) 98 53 95.
- Venezuela:** IND. VENEZOLANAS PHILIPS S.A., c/o MAGNETICA S.A., Calle 6, Ed. Las Tres Jotas, App. Post. 78117, CARACAS, Tel. (02) 239 39 31.
- For all other countries apply to:** Philips Components Division, International Business Relations, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands,  
AS58

© Philips Export B.V. 1988

This information is furnished for guidance, and with no guarantee as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced in any way, in whole or in part, without the written consent of the publisher.