
NOVEMBER 1980 Volume 5, Number 11 $2.50 in USA/$2.95 in Canada

BYTE®

marcus b

A McGRAW-HILL PUBLICATION

the small systems journal

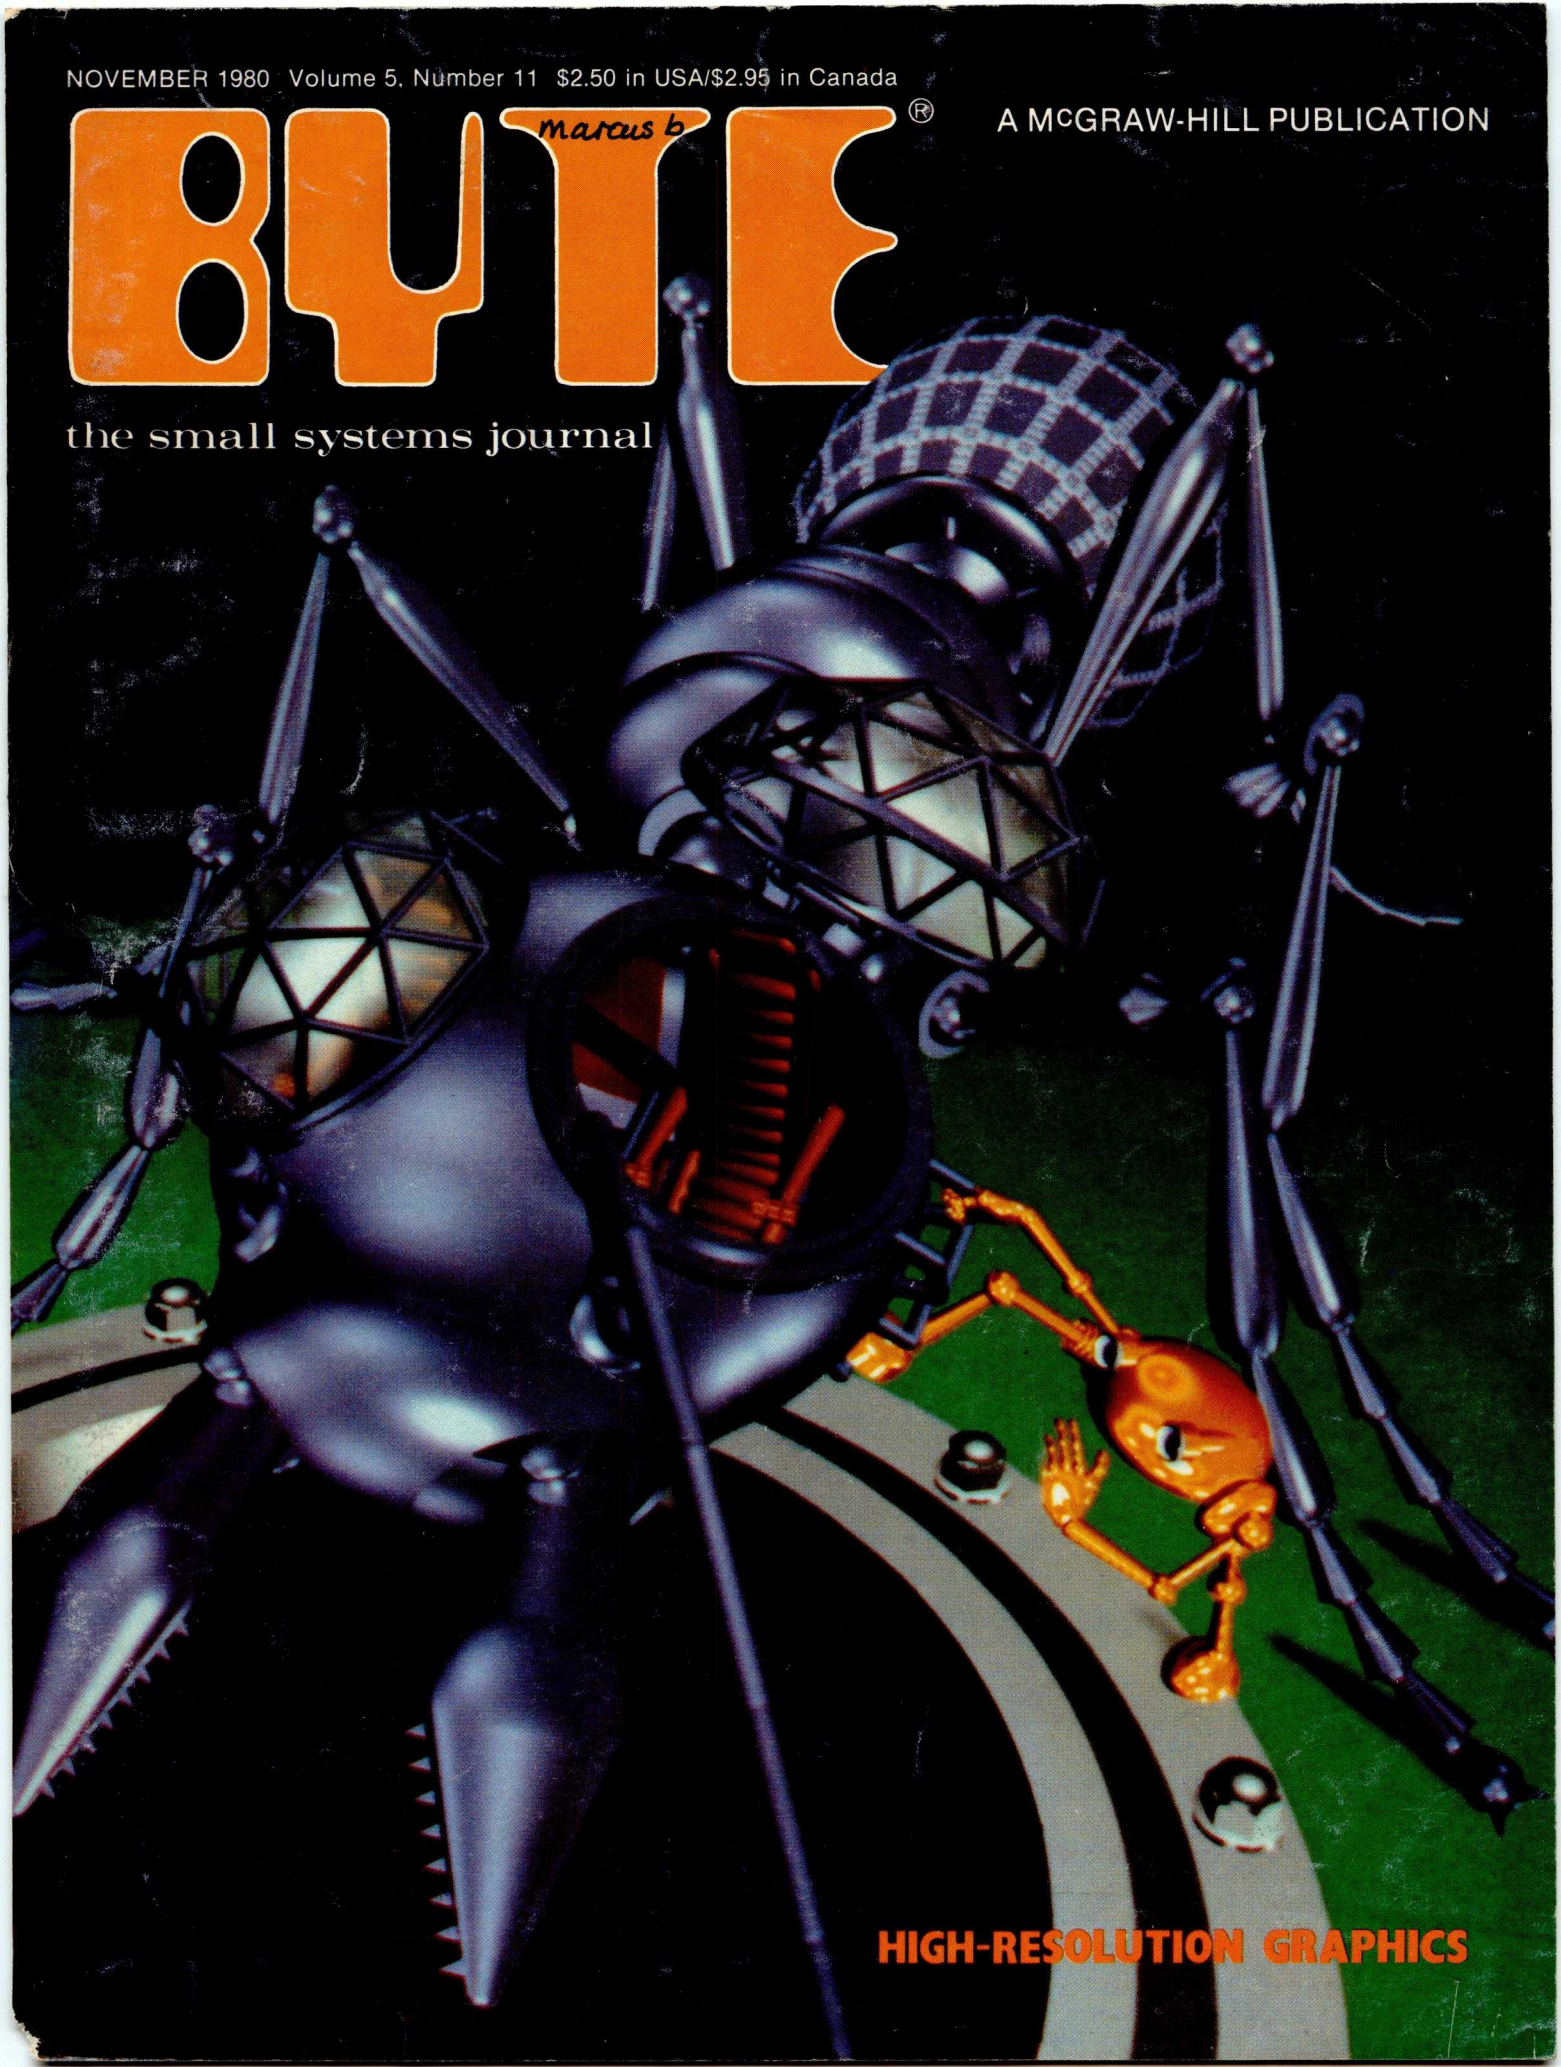

HIGH-RESOLUTION GRAPHICS

WHAT ARE YOU LOOKING FOR IN A SYSTEM?

VERSATILITY — Data bus—motherboard design allows you to configure a system to the end users exact needs.

EXPANDABLE — Minimum RAM capacity 56K Expandable to 768K. Two I/O ports — Expandable to seventeen.

MASS STORAGE— 3.0 M/bytes on 5¼" flexible disks. (4 drives) 5.0 M/bytes on 8 inch flexible disks—(4 drives)
40 M/bytes on "Winchester" fixed disk.


SOFTWARE — Operating System — Multitasking, multiuser with memory management.
Languages — FORTRAN, Pascal, BASIC, PILOT
Utilities — Debug, Sort-Merge, Diagnostics — over 40 others.
Data Processing — General Ledger, Receivables, Payables, Payroll, Jobcost, Mail List, Inventory, Record Management System.
Word Processing — Text Editor and Processor — device independent with proportional spacing bidirectional printing.

COST EFFECTIVE—System consisting of 128K processor, terminal, and 2.4 M/byte dual eight-inch disk drives — less than $6,000.00 (O.E.M. 100 quantity)




SOUTHWEST TECHNICAL PRODUCTS CORPORATION
219 W. Rhapsody
San Antonio, Texas 78216 (512) 344-0241


Circle 384 on inquiry card.

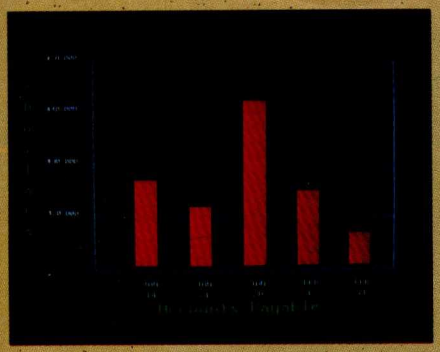

Management Information Display

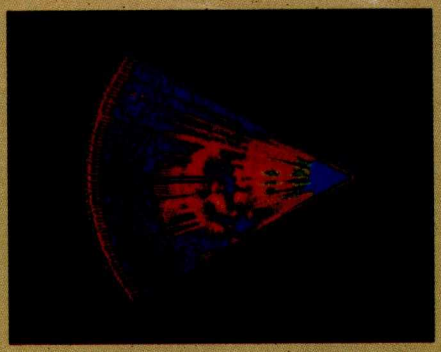

Ultrasonic heart sector scan

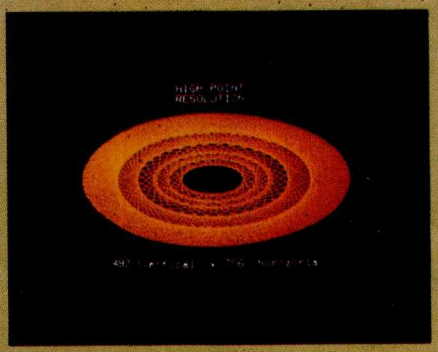

High-resolution display with alphanumerics

Get the professional color display that has BASIC/FORTRAN simplicity

LOW-PRICED, TOO

Here's a color display that has everything: professional-level resolution, enormous color range, easy software, NTSC conformance, and low price.

Basically, this new Cromemco Model SDI* is a two-board interface that plugs into any Cromemco computer.

The SDI then maps computer display memory content onto a convenient color monitor to give high-quality, high-resolution displays (756 H x 482 V pixels).

When we say the SDI results in a high-quality professional display, we mean **you can't get higher resolution than this system offers in an** NTSC-conforming display.


The resolution surpasses that of a color TV picture.

BASIC/FORTRAN programming

Besides its high resolution and low price, the new SDI lets you control with optional Cromemco software packages that use simple BASIC- and FORTRAN-like commands.

Pick any of 16 colors (from a 4096-color palette) with instructions like DEFCLR (c, R, G, B). Or obtain a circle of specified size, location, and color with XCIRC (x, y, r, c).

*U.S. Pat. No. 4121283

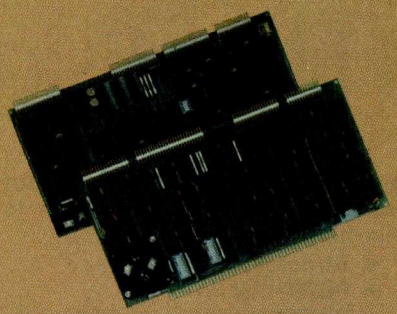

Model SDI High-Resolution Color Graphics Interface

HIGH RESOLUTION

The SDI's high resolution gives a professional-quality display that strictly meets NTSC requirements. You get 756 pixels on every visible line of the NTSC standard display of 482 image lines. Vertical line spacing is 1 pixel.

To achieve the high-quality display, a separate output signal is produced for each of the three component colors (red, green, blue). This yields a sharper image than is possible using an NTSC-composite video signal and color TV set. Full image quality is readily realized with our high-quality RGB Monitor or any conventional red/green/blue monitor common in TV work.



Model SDI plugs into Z-2H 11-megabyte hard disk computer or any Cromemco computer

DISPLAY MEMORY

Along with the SDI we also offer an optional fast and novel **two-port** memory that gives independent high-speed access to the computer memory. The two-port memory stores one full display, permitting fast computer operation even during display.

CONTACT YOUR REP NOW

The Model SDI has been used in scientific work, engineering, business, TV, color graphics, and other areas. It's a good example of how Cromemco keeps computers in the field up to date, since it turns any Cromemco computer into an up-to-date color display computer.

The SDI has still more features that you should be informed about. So contact your Cromemco representative now and see all that the SDI will do for you.

Cromemco
incorporated
280 BERNARDO AVE., MOUNTAIN VIEW, CA 94040 • (415) 964-7400
Tomorrow's computers today

Circle 1 on inquiry card.



Here's the state of the art in low-cost hard-disk computers

11 MEGABYTES OF FAST HARD-DISK STORAGE

Yes, the Cromemco Model Z-2H is in a class by itself in the computer field.

These Z-2H features tell you why:

- **11 megabytes of hard-disk storage**
- **64 kilobytes of fast RAM**
- **Two dual-sided floppy disk drives**
- **Z-80A type processor**
- **Fast 4 MHz operation—150 nanosecond access time**
- **Fast hard-disk transfer rate of 5.6 megabits/second**
- **Low cost**

And that's not all you get. Not nearly.

BROAD SOFTWARE SUPPORT

You also get Cromemco software support—the broadest software support in the microcomputer field. Software that Cromemco is known for. Like this:

- **Structured BASIC**
- **FORTRAN IV**
- **RATFOR (RATional FORtran)**
- **COBOL**
- **Z-80 Macro Assembler**
- **Word Processing System**
- **Data Base Management**

And more all the time.

FIELD PROVEN

The Z-2H is clearly in a class by itself. We introduced it last summer. It's field proven. It's reliable.

And it's rugged. Housed in a sturdy, all-metal cabinet.

EASILY EXPANDABLE

As always with Cromemco, you get expandability. The fast 64K RAM in this Model Z-2H can be expanded to 512 kilobytes. That amount of RAM combined with 11 megabytes of hard-disk storage gives you enormous computer power—the equal or even beyond what much larger computers sometimes offer.

What's more, this computer gives you a 12-slot card cage. That's to plug in your special circuits as well as additional RAM and interface cards.

This expandability is supported by still more Cromemco value — the Z-2H's heavy-duty power supply that gives you 30A at 8V and 15A at ±18V to support plug-ins.

LOW COST — SEE IT NOW

The Z-2H is real. It's been in the field for many months. It's proven itself.

You should see the Z-2H now. Contact a Cromemco representative and arrange for a demo. Learn that Cromemco is a survey-winner for reliability.

And learn that the Z-2H is under $10K.


In the long run it always pays to get the best.

Cromemco
incorporated
280 BERNARDO AVE., MOUNTAIN VIEW, CA 94040 • (415) 964-7400
Tomorrow's computers today


Circle 1 on inquiry card.



Page 22

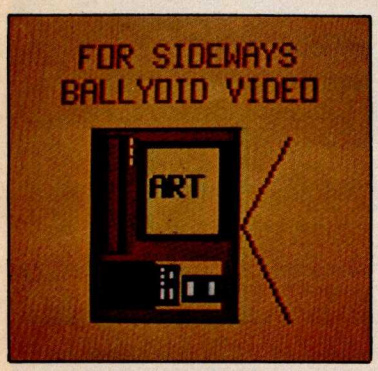

Page 90

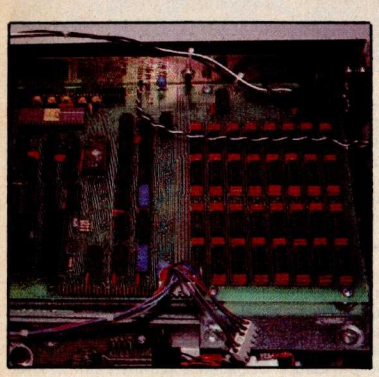

Page 158



Page 172

Foreground

32 HOME IN ON THE RANGE! AN ULTRASONIC RANGING SYSTEM
by Steve Ciarcia
Combine automatic sonar ranging and infrared-light detection in a computer-controlled scanner.

64 MICROGRAPH, PART 1: DEVELOPING AN INSTRUCTION SET FOR A RASTER-SCAN DISPLAY *by E Grady Booch*
Micrograph is an intelligent, low-cost, color-graphics terminal that interfaces to any microcomputer and standard, unmodified color television receiver.

126 GRAPHIC COLOR SLIDES, PART 1 *by Alan W Grogono*
The first of this two-part article gives a series of useful subroutines for generating color images on a Compucolor II.

148 THREE-DIMENSIONAL GRAPHICS FOR THE APPLE II *by Dan Sokol and John Shepard*
With this popular computer, use a two-color scheme to generate three-dimensional figures.

296 A GENERAL INTERPOLATING GRAPHICS PACKAGE FOR THE TRS-80 *by D K Cohen and Devon Crowe*
Interpolate between points of a graphed function and three-dimensional figures.

340 AN 8088 PROCESSOR FOR THE S-100 BUS, PART 3
by Thomas Woodward Cantrell
This monitor program takes advantage of some powerful software and architectural aspects of the 8088 processor.

Background

22 THE FUTURE OF COMPUTER GRAPHICS *by Bruce Eric Brown and Stephen Levine*
Take a look at the future of graphics hardware and applications.

90 LANGUAGE CONTROL STRUCTURES FOR EASY ELECTRONIC VISUALIZATION *by Dr Thomas DeFanti*
Zgrass, a hybrid of language and hardware, can be used to solve graphic-display problems.

180 A SIMPLIFIED THEORY OF VIDEO GRAPHICS, PART 1
by Allen Watson III
Part 1 covers the principles of television and computer-generated graphics.

206 GETTING TO KNOW YOUR MONITOR *by Ron Dalpiaz*
Meet the most frequently used human/computer interface — the video terminal.

220 DIGITAL STORAGE OF IMAGES *by Thomas Williams*
Theory and practice of digital-image capture and storage are explained in detail.

244 MACHINE PROBLEM SOLVING, PART 3: THE ALPHA-BETA PROCEDURE *by Peter Frey*
In the conclusion of this series, we discover how searching for information stored in tree structures can be made more efficient.

361 ADD MACRO EXPANSION TO YOUR MICROCOMPUTER, PART 2
by David C Brown
Notes on implementation and options are presented in this final part.

Nucleus

6 Editorial
16 Letters
62, 86 Technical Forum
108 Book Reviews
112, 114, 292, 322 BYTE's Bugs
114 Books Received
116, 145 Programming Quickies
119 BYTE's Bits
147 Clubs and Newsletters
158, 190, 196 Product Reviews
172 SIGGRAPH Convention Report
240 BYTELINES
266 Ask BYTE
314 Event Queue
343 Tom Sloan Cartoon
372 What's New?
430 Unclassified Ads
431 BOMB Results
431 BOMB
432 Reader Service

Publishers
Virginia Londoner,
Gordon R Williamson
Associate Publisher
John E Hayes
Assistant
Cheryl A Hurd

Founding Editor
Carl T Helmers Jr

Editor-in-Chief
Christopher P Morgan
Editors
Richard S Shuford, Gregg Williams,
Curtis P Feigel, Harold Nelson
Stan Miastkowski
Consulting Editor
Mark Dahmke
Book Editor
Bruce A Roberts
Chief Copy Editor
David W Hayward
Copy Editors
Faith Hanson, Warren Williamson,
Robin M Moss, Anthony J Lockwood
Assistant to the Editors
Faith Ferry
Assistants
Debe Wheeler, Karen A Cilley
New Products Editor
Clubs, Newsletters
Charles Freiberg
Drafting
Jon Swanson

Production Director
Nancy Estle
Assistant Production Director
Christine Dixon
Production/Advertising Coordinator
Wai Chiu Li
Production Art
Holly Carmen LaBossiere,
Deborah Porter
Chief Typographer
Sherry McCarthy
Typographers
Debi Fredericks, Donna Sweeney

Advertising Director
Thomas Harvey
Assistants
Ruth M Walsh, Ms. Marion Gagnon
Barbara J Greene, Rob Hannings

Special Projects Coordinator
Jill E Callihan
Marketing Coordinator
Laura A Hanson

Circulation Manager
Gregory Spitzfaden
Assistants
Agnes E Perry, Melanie Bertoni,
Barbara Varnum, Louise Menegus,
Andrew Jackson
Dealer Sales
Thomas Yanni

Controller
Daniel Rodrigues
Assistant
Mary E Fluhr
Accounts Receivable Specialist
Karen Burgess
Accounts Receivable Assistant
Jeanne Cilley

Receptionist
Jacqueline Earnshaw
Traffic Department
Mark Sandagata



In This Issue

The cover for this issue of BYTE is a still from a 90-minute computer-animated cartoon called *The Works*. The photo was provided by Dick Lundin and Lance Williams and is constructed from quadric surfaces and polygons, using texture-mapping and normal-perturbation techniques. The background was painted by Paul Xanter—programming credit also goes to Tom Duff and Duane Palyka. A trailer of *The Works* was shown at SIGGRAPH '80 (page 172), although the film itself may not be finished for another two years.

A number of the articles for this month's theme were solicited with the help of Jay Nickson and Ken Lodding; their editorial begins on page 6. Both are employed by DEC (Digital Equipment Corporation): Jay is the manager of the *human interface* program for simplifying man/machine communications, Ken is a senior software engineer whose long-term interests intermix art and computer graphics.

Publisher's Note

As most readers will have observed, the September Fifth anniversary issue marked the beginning of a new phase for BYTE. The jump from a 300-page to a 400-page issue means a 33% increase in the material presented to our readers each month.

Because advertisements tend to be more visible than editorial content (especially in a technical journal), some readers may suspect that the larger issues mean merely more ads. But, in fact, the larger issues have approximately one third more editorial content. The new size does create design and manufacturing problems, however. The solution to these problems includes a redesign of the editorial pages of BYTE to make the editorial content easier to find and use. We expect the new format to be implemented early in 1981.

We are confident that the increased editorial content and new format will make BYTE even more of a bargain as well as a more useful tool for our readers. And that, after all, is what it's all about.

Virginia Londoner
Publisher

Officers of McGraw-Hill Publications Company: Paul F McPherson, President; Executive Vice Presidents: James E Boddorf, Gene W Simpson; Group Vice President: Daniel A McMillan; Senior Vice President-Editorial: Ralph R Schulz; Vice Presidents: Kemp Anderson, Business Systems Development; Stephen C Croft, Manufacturing; Robert B Doll, Circulation; James E Hackett, Controller; William H Hammond, Communications; Eric B Herr, Planning and Development; John W Patten, Sales; Edward E Schirmer, International.

Officers of the Corporation: Harold W McGraw Jr, President, Chief Executive Officer and Chairman of the Board; Robert F Landes, Senior Vice President and Secretary; Ralph J Webb, Treasurer.

BYTE is published monthly by BYTE Publications Inc, 70 Main St, Peterborough NH 03458, a wholly-owned subsidiary of McGraw-Hill, Inc. Address all mail except subscriptions to above address: phone (603) 924-9281. Address subscriptions, change of address, USPS Form 3579, and fulfillment questions to BYTE Subscriptions, PO Box 590, Martinsville NJ 08836. Controlled circulation postage paid at Waseca, Minnesota 56093 - USPS Publication No. 528890 (ISSN 0360-5280). Canadian second class registration number 9321. Subscriptions are $18 for one year, $32 for two years, and $46 for three years in the USA and its possessions. In Canada and Mexico, $20 for one year, $36 for two years, $52 for three years. $32 for one year air delivery to Europe. $32 surface delivery elsewhere. Air delivery to selected areas at additional rates upon request. Single copy price is $2.50 in the USA and its possessions, $2.95 in Canada and Mexico, $4.00 in Europe, and $4.50 elsewhere. Foreign subscriptions and sales should be remitted in United States funds drawn on a US bank. Printed in United States of America.

Address all editorial correspondence to the editor at the above address. Unacceptable manuscripts will be returned if accompanied by sufficient first class postage. Not responsible for lost manuscripts or photos. Opinions expressed by the authors are not necessarily those of BYTE. Entire contents copyright • 1980 by BYTE Publications Inc. All rights reserved. Where necessary, permission is granted by the copyright owner for libraries and others registered with the Copyright Clearance Center (CCC) to photocopy any article herein for the base fee of $1.00 per copy of the article or item plus 25 cents per page. Payment should be sent directly to the CCC, 21 Congress St., Salem, MA 01970. Copying done for other than personal or internal reference use without the permission of McGraw-Hill is prohibited. Requests for special permission or bulk orders should be addressed to the publisher.

BYTE® is available in microform from University Microfilms International, 300 N Zeeb Rd, Dept PR, Ann Arbor MI 48106 USA or 18 Bedford Row, Dept PR, London WC1R 4EJ England.

Member
ABC
Audit Bureau of Circulations

Subscription WATS Line: (800) 258-5485
Office hours: Mon-Thur 8:30 AM - 4:30 PM, Friday 8:30 AM - Noon, Eastern Time

NATIONAL ADVERTISING SALES REPRESENTATIVES:


NORTHEAST (617) 444-3946
Hajar Associates
280 Hillside Ave.
Needham Heights MA 02194

MIDWEST (312) 864-3467
Hajar Associates
2405 Lawndale
Evanston IL 60201

EAST & SOUTH (212) 682-5844
Hajar Associates
521 Fifth Ave.
New York NY 10017

SOUTHWEST (714) 540-3554
NORTHWEST (415) 964-0706
Hajar Associates
1000 Elwell Ct., Suite 227
Palo Alto CA 94303

Circle 2 on inquiry card. →

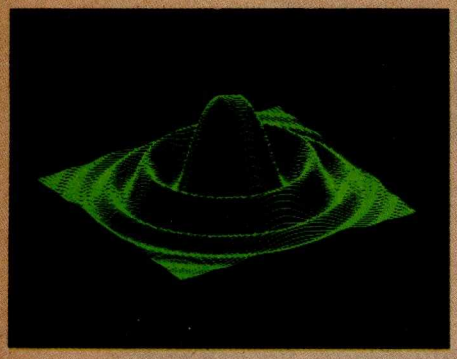


MICROANGELO

HIGH RESOLUTION GRAPHICS SINGLE BOARD COMPUTER

by

SCION
CORPORATION

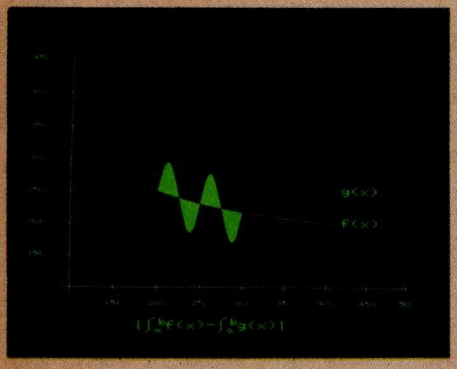



RS-170 composite or direct drive output


Local or external sync generation

4 or 5 Mhz Z80 microprocessor

60 hertz real-time clock

8 level interrupt tie-in

IEEE S100 bus compatible

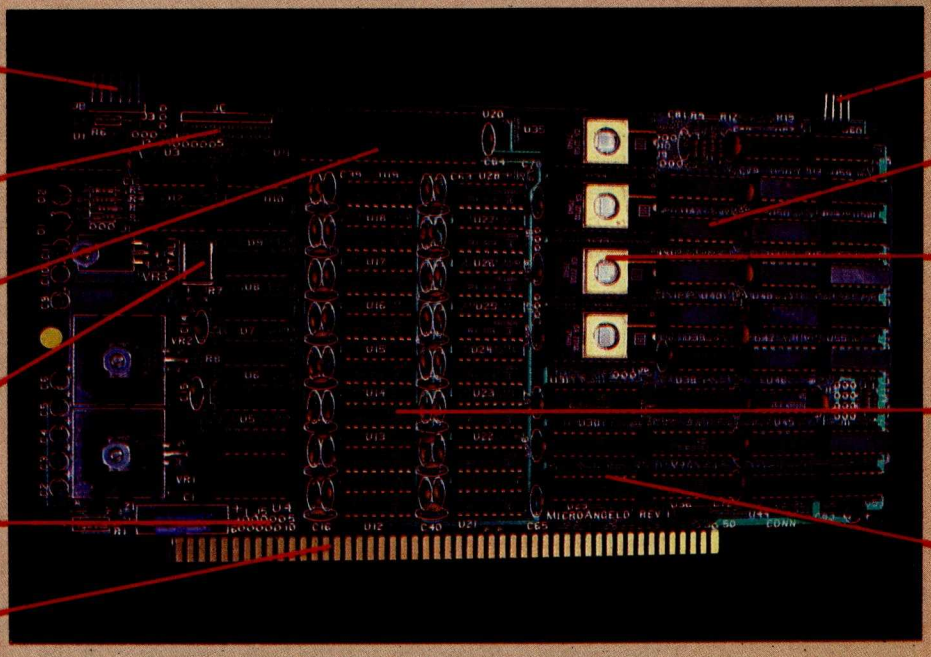

Light pen interface

Time multiplexed refresh

4K resident Screenware™ Pak I operating system

32K RAM isolated from host address space

High speed communications over parallel bus ports

Screenware™ Pak I

A 4K byte operating system resident in PROM on MicroAngelo.™ Pak I emulates an 85 character by 40 line graphics terminal and provides over 40 graphics commands. Provisions exist for user-defined character sets and directly callable user extensions to Screenware Pak I.

Host Resident Terminal Software


An interface software package that coordinates input/output from the MicroAngelo™ graphics board, the MicroAngelo™ keyboard, and your computer. The result is a flexible, yet sophisticated graphics terminal.

SCION Corporation
8455-D Tyco Road
Vienna, Va. 22180
(703) 827-0888

European Distributor:
Micro Diversions UK Ltd.
17/19 Mesnes Street
Wigan, England WN1 1QP
09-423 4311

Circle 3 on inquiry card.

Have some great memories.

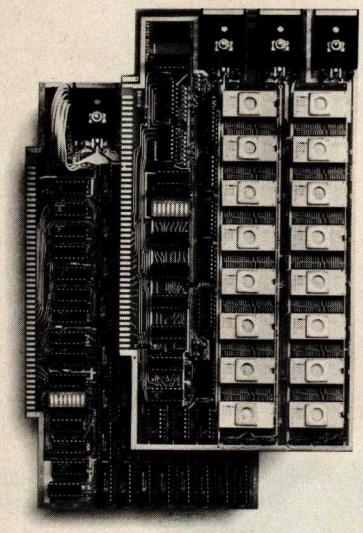

16K PROM boards.

■ PROM card has 2708-type memory ■ Quality board construction ■ 0-4 wait states ■ Address any 4K group to any 4K boundary ■ Control up to 8 banks of memory ■ Fully assembled and tested ■ PRICE—$300

(California residents add 6% sales tax)


Expandable 5 MHz RAM boards.

8—32K expandable RAM board uses TI 4044 memory runs at 5MHz ■ Fast 250 ns access time ■ Bank select ■ Address any 4K block to any 4K boundary ■ Quality board construction

PRICE—8K—$175; 16K—$315; 24K—$475; 32K—$620; 8K add-on kits—$135

(California residents add 6% sales tax)

Call or write Artec for details



ARTEC ELECTRONICS, INC.

605 Old County Rd., San Carlos, CA 94070
Telephone (415) 592-2740

Editorial

The World of Computer Graphics

Guest Editorial by Ken Lodding and Jay Nickson

Man is a visual animal. He surrounds himself with graphic images. Images are employed to convey information, to explain concepts, and to communicate feelings. The ability to draw is instinctive. It materializes in infants soon after the start of verbal development, perhaps to complement the slowly developing verbal skills. Although the ability to draw tends not to become as fully developed as verbal skills, images continue to provide much of the adult human communications ability. Pictures are a primary information-carrying channel: the histogram accompanying a financial article, the plot of a mathematical function, and the illustrations in BYTE are but a few examples.

The importance of graphics for conveying information arises from the nature of man's visual system. The eye provides an extremely high-bandwidth information channel for transferring the data to be processed by the brain's optic center. The importance of this channel can be seen from the redundancy built into the system and from the distribution of optic nerve fibers in the brain. It is believed that no less than six different brain sites are directly serviced by connecting optic nerve fibers. (See reference 4.) The fundamental importance of visual information is reflected in the old adage, "seeing is believing," and in the observation that *understand* is one of the synonyms of the word *see*. Text fails to use our native abilities to comprehend information fully because it presents data in a linear, sequential fashion. Contrast this with graphical images, which can be processed in a single viewing—a phenomenon called *preattentive perception*. (See reference 6.)

The computer has become a primary source or conveyor of information, yet the main interface between man and machine has remained the serially oriented text display. The net result is that, as the volume of data available to be presented increases, the user's communication channel becomes swamped with an avalanche of text output. The volume of this avalanche far too often restricts the comprehension of the information. The information is obscured as effectively as if it had been encrypted. The spectacle of the computer user literally buried under reams of printed output has ceased to be an amusing cartoon and has become a nightmare for too many. To cope with the flood of information, the computer user is turning to graphics.

The information-transfer rate of a graph can be many orders of magnitude greater than an equivalent text presentation. Conceptually, a graph has greater information density than a table. Compare the plot of a sine curve with a table of sine values. Each value within the table corresponds to a specific point on the graph. However, the plot displays a far greater number of points than could the most extended table. A high information-transfer rate results from the greater data density and the faster operation of the human mind and visual system. Patterns, periodic functions, trends, and comparisons can often be obtained "by inspection" of a graph, while understanding a tabular display requires much more time and effort. This is not, however, accomplished without a cost. The only penalty paid for speed is the loss of precision: a graph cannot be read to the same number of significant digits as can be obtained from a table. This loss of precision is not a problem, as the specific data value of interest can be extracted from the function or table of data used to generate the plot initially.

About the Authors

Ken Lodding and Jay Nickson are employed by the Digital Equipment Corporation in Merrimack, New Hampshire.



"For reliable data storage, I recommend systems with Shugart disk drives."

Tom Knight, President—
Nycom, Los Altos, California

"The last thing you need when you put your personal computer or small business system to work is a disk drive that you can't rely on. If the drive quits, your system is out of business."

That's why more and more manufacturers and dealers depend on Shugart disk drives for reliable data storage. These professionals don't want disk drive problems any more than you do. Shugart has a large family of drives, too—in all sizes and capacities to suit your system storage needs. For the smaller system, the original 5¼-inch Minifloppy™ stores 250 to 500 kilobytes (single or double-sided)—that's about 50 to 100 pages of printed material. Our single and double-sided 8-inch floppys store 800 to 1600 kilobytes. And for systems that need a larger data base, our 8-inch or 14-inch fixed disk drives store from 5 to 58 megabytes. No other manufacturer offers such a wide variety of disk storage for personal computer and small business systems.

Word processing, general business, accounting—big system or small, you can rely on Shugart drives. We're known as the Headstrong company for good reason. We're Headstrong about reliability, quality, and value. Ask your dealer. He knows us.

Rely on the Headstrong Company.

TM—Minifloppy is a trademark of Shugart Associates.

Shugart®

475 Oakmead Parkway, Sunnyvale, California 94086


In addition to presenting data in a rapid, meaningful fashion, an important benefit of computer graphics is the ability to present images realistically. Plotting a topological surface, modeling DNA, creating an architectural rendering, and simulating a pilot's view from the cockpit of an aircraft are all enhanced by presenting the image in a manner which gives the viewer a sense that the picture is not an illusion. To achieve greater realism, a prime factor is to provide the illusion of depth. Perspective, hidden-line removal, shading, and highlighting all provide depth cues to the viewer. This month's computer-generated cover by Lance Williams of the New York Institute of Technology clearly illustrates the current state of the art as applied to an artistic endeavor. The same techniques are available and can be employed when graphically representing numeric data.

Three-Dimensional Graphics

To provide the illusion of depth, a three-dimensional model can be defined. Establishing the viewer's geometric relationship to the model and following the rules of perspective, the model image is mathematically projected onto a two-dimensional viewing plane. Although providing good visual depth cues (eg: parallel lines appearing to meet at a point), there is no real illusion of depth; in other words, the model image is still "flat." To correct this, the phenomenon of *stereopsis* (from the Greek, meaning "solid sight") can be employed. You may be familiar with the 1847 Brewster stereoscope. Here, the approach taken to give the illusion of depth was to photograph the same scene twice, having moved the camera about 6 cm sideways between photos. The two images could then be viewed through a stereoscope that utilized a prism and lens system to alter the image paths to the eye, so that the two views seemed to originate from a common point. (The old-fashioned stereopticon and the modern View-Master are variations on this theme.) The observer's visual system fused the two images, giving the illusion of a three-dimensional image.

Various computer-graphic techniques using the same principles have been developed. A common technique is to employ glasses with electro-optic shutter eyepieces to provide the image separation. With the electro-optic glasses, the *cyclopic* video display presents left- and right-perspective images in alternate frames, which are then synchronized with the electro-optic shutters. The left eye is presented with the left stereograph, while the right eye's view is blanked by the optical shutter; the image and shutter swap for the right eye. The viewer's internal visual system fuses the image to give the appearance of depth. For an example of this, see "The Future of Computer Graphics," page 22.

A different approach to providing left and right images to the visual system uses color to separate the images. Using a device called an *anaglyph*, the left view is presented in one color, and the right in a different color. Color filters control which eye sees what view. A program for generating and viewing anaglyphs is presented in the article "Three-Dimensional Graphics for the Apple II." (See page 148.) While the traditional colors employed are red and green, any two colors and corresponding filters could be used, because the illusion is based on the separation of the images, and has nothing to do with the particular colors. The phenomenon is as apparent to a

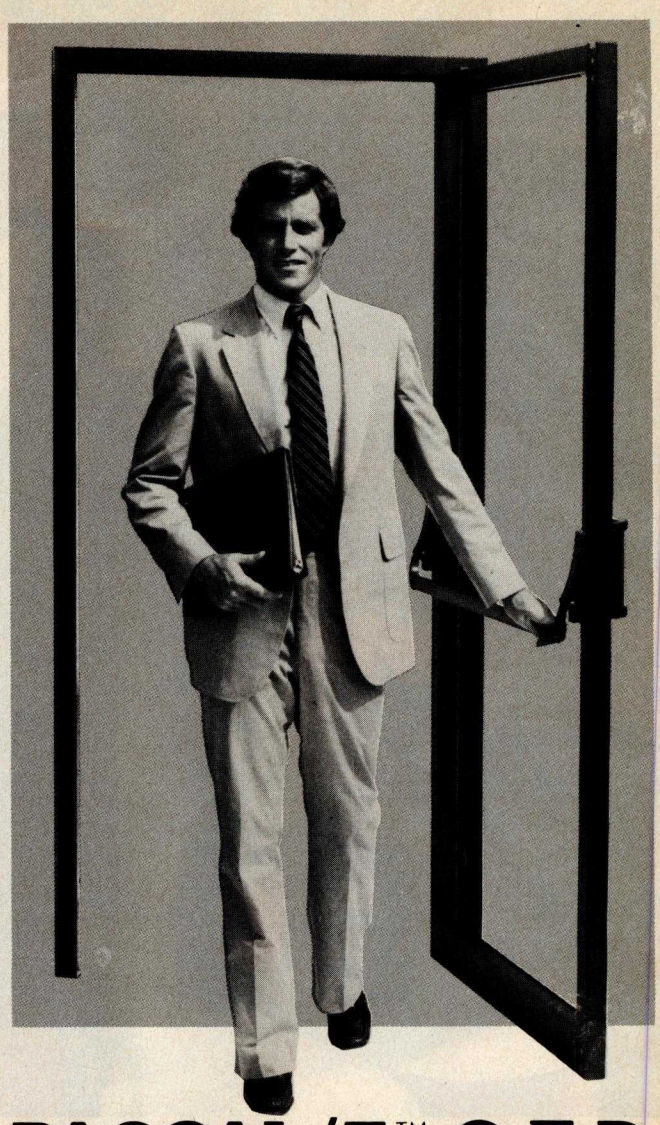

PASCAL/Z™ - Q.E.D.

Ithaca Intersystems PASCAL/Z is the most powerful CP/M™ compatible Z-80™ Pascal compiler ever . . . and here's why:

PASCAL/Z generates true Z-80 native code — ROMable and re-entrant — 5-10X faster than P-code interpreters; permits separate compilation; supports Direct File Access and variable length STRINGs; utilizes fast one-pass recursive descent organization; the macro-assembler generates relocatable object modules; and much, much more.

Complete package includes compiler, macro-assembler, linker/loader and source for the full library on one disk; with free copy of Jensen/Wirth book and complete documentation. Only $395.00.

IT'S DEMONSTRABLE!


Don't just take our word for it. Ask for a demonstration of these features and more today at Computerland® and other full-service computer stores.

Ithaca Intersystems Inc., 1650 Hanshaw Road
P.O. Box 91, Ithaca, N.Y. 14850. Phone (607) 257-0190

Computerland is a registered trademark of Computerland Corporation.
CP/M and Z-80 are trademarks of Digital Research Corp. and Zilog, Inc. respectively.
PASCAL/Z and InterSystems are trademarks of Ithaca Intersystems Inc.

InterSystems™
Ithaca Intersystems Inc.

Micros for bigger ideas.

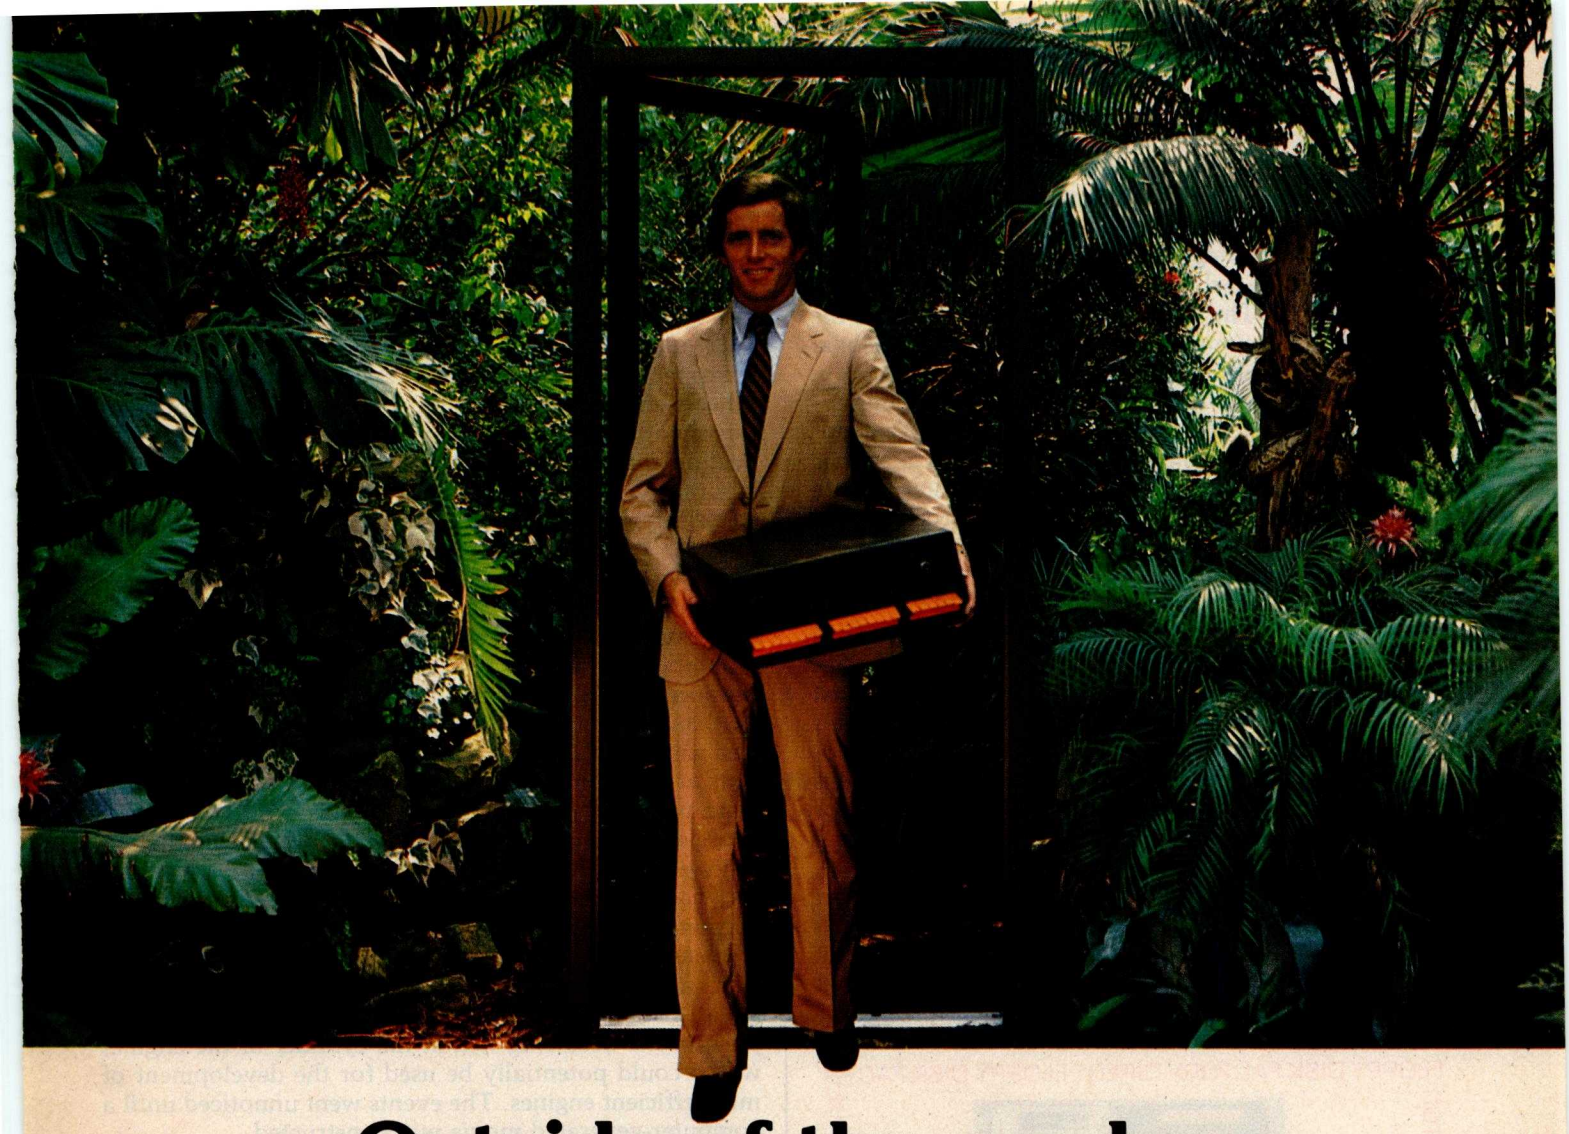

Outside of the garden you need a computer that can grow.

For the average garden-variety home and hobby operation, a high quality personal computer is a real temptation. But let's face it: in the world of business, engineering and scientific applications you need a system that can keep up with bigger ideas.

Bigger ideas today mean the power and flexibility to move the micro up to and beyond the level of yesterday's minis. More memory to hold bigger data bases. More flexibility to handle a variety of data entry devices. More programming and computing power for numbercrunching and applications development. And easy upgrade to 16 bit operation when you need it.

Intersystems has that, and more. The power and flexibility of the versatile S-100 bus, with 20 slots of expandability for up to 16 individually-addressable DMA devices and up to 1 Megabyte of memory, fully accessible to all users via our unique memory management system. Plus reliable Intersystems design and manufacture, and the support of our PASCAL/Z™...the most powerful Z-80™ compiler ever.

For really serious computing, our front panel provides a powerful diagnostic tool for debugging or development. Combined with a scope, it allows you to look at any location in the circuitry, set breakpoints, trigger and view one-shot events, and many other activities usually possible only with expensive logic analyzers. No wonder it's fast becoming the tool of choice for repair technicians and custom hardware designers.

Intersystems Series II is the most complete line of fully IEEE 696 compatible S-100 boards...easily upgradeable to our MPU 8000™ or other 16 bit S-100 CPU's as they become available...so you're never locked out of rapid expansion, or locked into obsolescence, by dependency on a proprietary product line.

So if you've left those garden-variety applications behind, come to Intersystems and get a system that will grow as big as your next idea. Get it from the people who know small computers...your Computerland store...or other fine full service computer dealers.

Ithaca Intersystems Inc., 1650 Hanshaw Road
P.O. Box 91, Ithaca, N.Y. 14850.
Phone (607) 257-0190 TWX: 510 255 4346.

Z-80 is a trademark of Zilog, Inc.
PASCAL/Z, MPU 8000 and InterSystems are trademarks of Ithaca Intersystems Inc.

InterSystems™
Ithaca Intersystems Inc.

Micros for bigger ideas.

color-blind person as it is to a viewer with normal color vision. For those interested in further information, the book *Seeing* is an excellent reference on vision in general and stereopsis in particular. (See reference 4.)

A more recent and unique approach to presenting three-dimensional images is SpaceGraph, developed by Dr Larry Sher. His technique uses a vibrating mirror and a video display. The technique is to generate on the display two-dimensional "slices" of the three-dimensional object to be viewed. The slices are rapidly generated in synchronization with the dynamic motion of the mirror, the front slice being generated when the mirror is extended toward the viewer, the back slice when the mirror is concaved away from the viewer, and the intermediate slices as appropriate for the travel of the mirror between these extremes. The rapid sequence of images is fused by the viewer's visual system to give the illusion of a "space filling" object. (See reference 7.)

Those adventuresome souls who find three-dimensions insufficient for their purposes can use computer graphics as an aid for visualizing objects which, theoretically, exist in four or more dimensions. If you are interested in this area, *Hypergraphics* is a good introduction to the subject. (See reference 3.) The book includes hyperstereograms of such objects as hypercubes or tesseracts, hypercones, and other denizens of higher dimensions.

Animation is another technique that can assist in user comprehension of data. Often we are dealing with information gathered at discrete intervals over a period of time. Here, the problem of analyzing data is one of understanding what is occurring to the data elements over some length of time. Animation provides a looking glass into the time domain. Flowing, three-dimensional images can represent anything from an economic world model to a bridge under stress.

Hidden Benefits

There are times when animation provides the viewer with unexpected information—information which, in retrospect, was present but not readily discernible by any other method of examination. An interesting example of this situation involves the simulation of an internal combustion engine. The simulation, performed at a research laboratory, wrote out data in the conventional manner: stacks of numbers. At the same laboratory, some time after the engine simulation had been completed and used for experiments, a different group of researchers developed a computer-animation system. The engine simulation was selected as a good demonstration of the new graphics software, and a computer-generated film was produced. During the screening of the film it was noticed that small rectangular elements, used to represent idealized gas packets, displayed a strange, unexpected oscillation at their endpoints. Review of the animation software provided no explanation for this erratic behavior. Close examination of output from the original simulation revealed that the oscillations were indeed present. This fact had not been previously noticed because the information had been obscured by a combination of the tremendous amount of data, the smallness of the oscillation, and the extended period over which it occurred. What had in fact been found were acoustical-wave phenomena occurring within the cylinder of the engine, which could potentially be used for the development of more efficient engines. The events went unnoticed until a computer-generated movie was constructed.

In the 30 years since its beginnings, computer-generated graphics has grown steadily, but not spectacularly. Previously the costs of both the display and the computer resources needed to support graphic displays have limited the impact. Rapidly falling memory prices and television technology have renewed the interest in computer graphics. The combination of a television raster display and a memory-intensive, bit-mapped architecture makes possible a graphic system capable of providing full-color, dynamic images with previously unheard of realism and economy. "Micrograph, Part 1: Developing an Instruction Set for a Raster-Scan Display," describes the design and construction of a color-display processor that costs approximately $250 to build. (See page 64.) This is possible only because of the plummeting cost of hardware. This is a cost reduction of three orders of magnitude in 15 years, with color added for free!

Graphics Software

The advent of inexpensive graphics hardware has, not unexpectedly, spurred the development of graphics software. The traditional approach for supporting graphics has been to provide a collection of subroutines that perform the graphic-display functions. These subroutines are called from languages whose orientation is toward the manipulation of text and numerical data. This approach is fine if you only want to accumulate data and make a

FLOPPY DISK FACTORY DIRECT FLOPPY DISK FACTORY DIRECT FLOPPY DISK FACTORY DIRECT

Why not kill two birds with one stone?

If you have an Apple* and you want to interface it with parallel and serial devices, we have a board for you that will do both. It's the AIO.™


Serial Interface.

The RS-232 standard assures maximum compatibility with a variety of serial devices. For example, with the AIO you can connect your Apple* to a video terminal to get 80 characters per line instead of 40, a modem to use time-sharing services, or a printer for hard copy. The serial interface is software programmable, features three handshaking lines, and includes a rotary switch to select from 7 standard baud rates. On-board firmware provides a powerful driver routine so you won't need to write any software to utilize the interface.



Parallel Interface.

This interface can be used to connect your Apple* to a variety of parallel printers. The programmable I/O ports have enough lines to handle two printers simultaneously with handshaking control. The users manual includes a software listing for controlling parallel printers or, if you prefer, a parallel driver routine is available in firmware as an option. And printing is only one application for this general purpose parallel interface.



Two boards in one.

The AIO is the only board on the market that can interface the Apple to both serial and parallel devices. It can even do both at the same time. That's the kind of innovative design and solid value that's been going into SSM products since the beginning of personal computing.

The AIO comes complete with serial PROM's, serial and parallel cables, and complete documentation including software listings.

See the AIO at your local computer store or contact us for more information.

SSM

2190 Paragon Drive
San Jose, California 95131
(408) 946-7400



*Apple is a TM of Apple Computers, Inc.

Maybe we can save you a call.

Many people have called with the same questions about the AIO. We'll answer those and a few more here.

Q: Does the AIO have hardware handshaking?
A: Yes. The serial port accommodates 3 types—RTS, CTS, and DCD. The parallel port handles ACK, $\overline{\text{ACK}}$, BSY, STB, and $\overline{\text{STB}}$.

Q: What equipment can be used with the AIO?
A: A partial list of devices that have actually been tested with the AIO includes: IDS 440 Paper Tiger, Centronics 779, Qume Sprint 5, NEC Spinwriter, Comprint, Heathkit H14, IDS 125, IDS 225, Hazeltine 1500, Lear Siegler ADM-3, DTC 300, AJ 841.

Q: Does the AIO work with Pascal?
A: Yes. The current AIO serial firmware works great with Pascal. If you want to run the parallel port, or both the serial and parallel ports with Pascal, order our "Pascal Patcher Disk."

Q: What kind of firmware option is available for the parallel interface?
A: Two PROM's that the user installs on the AIO card in place of the Serial Firmware PROM's provide: Variable margins, Variable page length, Variable indentations, and Auto-line-feed on carriage return.

Q: How do I interface my new printer to my Apple using my AIO card?
A: Interconnection diagrams for many popular printers and other devices are contained in the AIO Manual. If your printer is not mentioned, please contact SSM's Technical Support Dept. and they will help you with the proper connections.

Q: I want to use my Apple as a dumb terminal with a modem on a timesharing service like The Source. Can I do that with the AIO?
A: Yes. A "Dumb Terminal Routine" is listed in the AIO Manual. It provides for full and half duplex, and also checks for presence of a carrier.


Q: What length cables are provided?
A: For the serial port, a 12 inch ribbon cable with a DB-25 socket on the user end is supplied. For the parallel port, a 72 inch ribbon cable with an unterminated user end is provided. Other cables are available on special volume orders.

The AIO is just one of several boards for the Apple that SSM will be introducing over the next year. We are also receptive to developing products to meet special OEM requirements. So please contact us if you have a need and there is nothing available to meet it.

SSM

SSM Microcomputer Products
2190 Paragon Drive
San Jose, California 95131
(408) 946-7400

The man, the wi

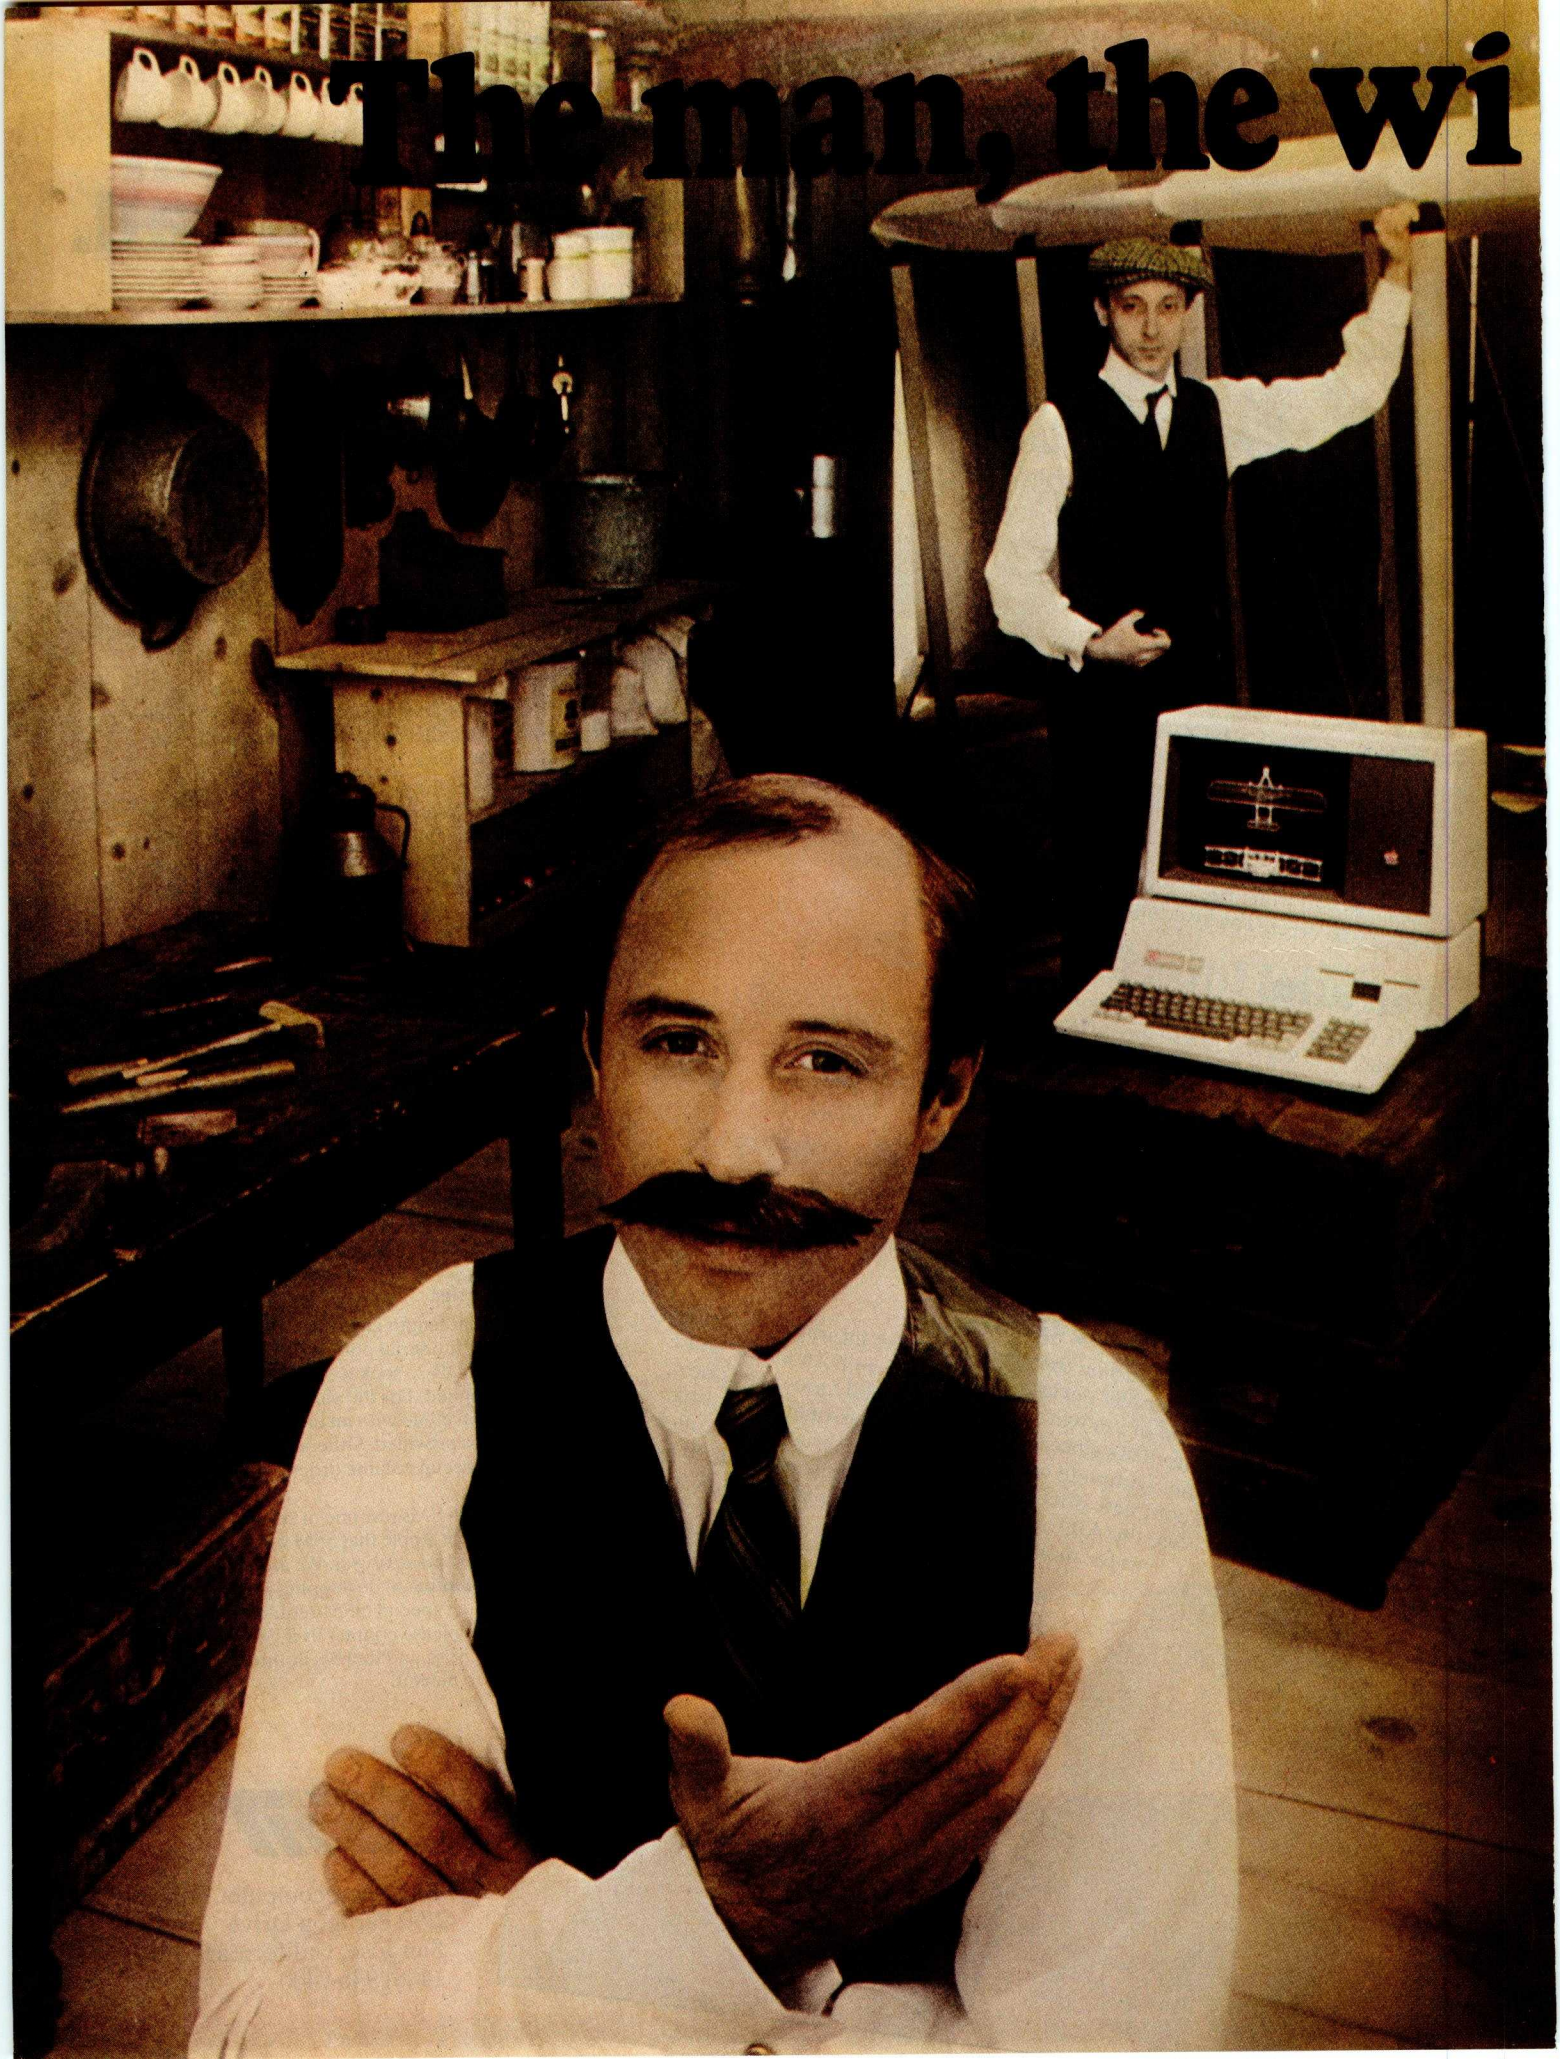

ng and the Apple.

If you could talk to Orville Wright, he'd tell you the problems he faced as a turn-of-the-century engineer. You could tell him all about the technological solutions available to today's engineer and scientist... particularly a 20th century phenomenon that tests assumptions and defines models before a project gets off the ground. The Apple personal computer.

Computation, calculation, analysis...the power to pilot your projects.

With a highly-integrated system from the extensive Apple personal computer family, Orville and brother Wilbur would have increased their productivity. Perhaps even launched the Kitty Hawk Flyer well before 1903.

An Apple in their hangar would have freed them from the time and tedium of crunching numbers by hand.

An Apple in your lab or office will give you the problem-solving capabilities you demand from a big computer...without the time-consuming problems typical of remote processing.

But the Apple system solution doesn't stop there. It keeps on soaring with proven performance, power and expandability



Apple's existing software library includes a program that plots the shape of an airfoil, given its parameters.

that's unparalleled for analyzing alternative paths of design and modeling a wide variety of physical processes.

Want more memory? Depending on your choice of system, Apple has memory expandable to 64K bytes or 128K bytes. Prefer wide displays? Choose 40 or 80 characters. Need to control instruments in the lab? Get on the IEEE 488 bus. Over 100 companies also supply peripherals for Apple because Apple is the most popular personal computer with the least complicated interface.

Want an efficient system of data storage and access? Apple's 5¼" disk drive not only offers you increased application versatility, but high density (143K bytes), high speed and low cost. You can even add up to four or more drives to your Apple system. With proven reliability, no wonder it's the most popular drive on the market today.



Wilbur determined that birds didn't have to constantly flap their wings to fly. With an Apple, he could've determined the fixed-wing design of the Kitty Hawk Flyer much faster.

FORTRAN that helped to design a 20th century flying machine.

Fluent in the same language that helped to design the 747, Apple FORTRAN lets you tackle differential equations at the touch of a key. And since more than 170 companies also offer software for the Apple family, you can have one of the most impressive program libraries ever...including vast subroutine libraries for math, science, engineering and statistics. When you write your own programs, the Apple also speaks in languages other than FORTRAN: Pascal, BASIC, PILOT and 6502 assembly language.

Where to learn more about Apple, the small-yet-serious solution.

Let your imagination soar with Apple.

Discover the 20th century tool versatile enough to monitor quality controls and manufacturing schedules, orchestrate tolerance tests and determine alternative parts selection. Learn why Apple emerges as the technological leader of reliable personal computer products that increase your productivity.

Let the Apple dealer show you how, by putting the system of your choice through its paces. He'll tell you about our extended warranty, support and service. And he'll prove that a personal computer is not just a flight of fancy but a serious solution. Don't let history pass you by. Visit your nearest Apple dealer, or call 800-538-9696. In California, 800-662-9238.

apple® computer



Circle 6 on inquiry card.

AN EXCITING NEW WAY TO POLISH THE APPLE . . .

CHEM LAB SIMULATIONS FROM HIGH TECHNOLOGY!

High Technology introduces two new and effective education packages . . . **Chem Lab Simulation #1 and #2** . . . designed for use with the Apple II™ computer.

Developed by a chemistry professor at Oklahoma State University, both programs realistically and dynamically illustrate the laws of basic chemistry. They provide virtually unlimited results and instant feed back!

Suitable for high school or college level introductory chemistry students, the programs are an invaluable lecture aid. And for individual study, they provide first-hand student involvement as well as help solve the perennial teaching problems of limited time, space, and resources.

CHEM LAB SIMULATION #1 . . .

uses APPLE's™ high resolution graphics to simulate:


- An acid-base titration experiment
- Determination of an unknown weak acid, including a titration experiment and a pH-meter experiment
- Determination of Avogadro's Number, including a titration experiment and a monomolecular film experiment



CHEM LAB SIMULATION #2 . . .

written in machine language for fast response time, uses APPLE's™ colorful low-resolution graphics to simulate:

- The Ideal Gas Law
- The Kinetic-Molecular Theory
- The Principles of Entropy

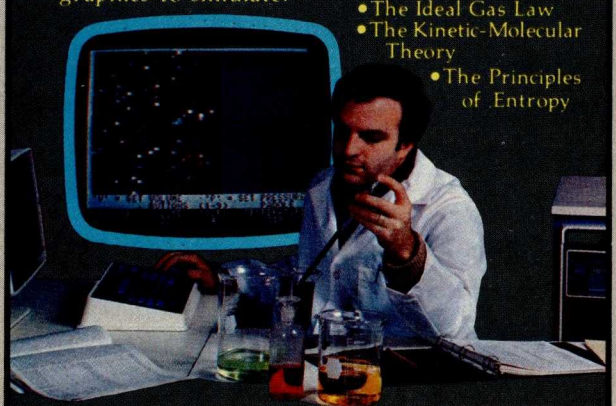

See your nearest dealer today, or contact:

High Technology, Inc.™
P.O. Box 14665
Oklahoma City, OK 73113
(405) 840-9900

APPLE™ is a registered trademark of APPLE COMPUTER, INC.

picture from it. The subroutine approach excludes the possibility of treating graphical objects as variables within the language, or using them within statements and expressions. Some research work has been done which includes the concept of graphical objects and operators within a language structure. To date, there have been a number of different approaches to the problem of handling graphical objects. Deeply intertwined in the problem is our fundamental lack of understanding of how to provide graphics support. Viewed from the perspective of a language, what fundamental primitives must be provided? What are the appropriate data types? How are expressions constructed? What operators need to be provided? The list of unknowns goes on and on. "Language Control Structures for Easy Electronic Visualization," by Dr Tom DeFanti, addresses this area. (See page 90.) Some examples of other, experimental, graphics languages are given in references 2 and 5. SHAZAM (Smalltalk's sHaded imAge Zippy Animated Moviemaker) is an interesting animated-movie language written in Smalltalk. (See reference 1.) In no way does this list exhaust the progress that has been made in graphics languages, but rather it reflects a small sampling of recent work.

All the aspects of graphics we have discussed allow us to construct windows into universes, real or imaginary. Computer graphics is exciting because with this tool we can witness the unraveling of a DNA molecule, or the collision of galaxies. We can watch the structure of the universe as it expands from the moment of the theoretical big bang, or, reversing entropy, see it collapse into the primordial particle. We can plot a mathematical function, view an economic trend, or travel faster than light to where robotic insects populate metallic worlds. Best of all, we can make it all seem real, because we can see it! ■

References

1. Baecker, R. "A Conversational Extensible System for the Animation of Shaded Images." *Computer Graphics*, Volume 10, Number 2, Summer 1976.
2. Bergman, S and A Kaufman. "BGRAF 2: A Real-Time Graphics Language With Modular Objects and Implicit Dynamics." *Computer Graphics*, Volume 10, Number 2, Summer 1976.
3. Brisson, D (editor). *Hypergraphics — Visualizing Complex Relationships in Art, Science and Technology*. Westview Press, 1978.
4. Frisby, J. *Seeing*. New York: Oxford University Press, 1980.
5. Gonzales, C and J Vial. "GRAL — A Graphic Computer Language for Intelligent Terminals." *Proceedings of the Conference on Computer Graphics, Pattern Recognition and Data Structures*, May 1975.
6. Myers, W. "Computer Graphics: A Two Way Street." *Computer*, July 1980.
7. Shershow, H. "Realistic Spatial Display." *Digital Design*, June 1980.
8. Walters, T and W Harris. "Graphics in Depth." BYTE, Volume 3, Number 5, May 1978, page 16.

Articles Policy


BYTE is continually seeking quality manuscripts written by individuals who are applying personal computer systems, designing such systems, or who have knowledge which will prove useful to our readers. For a more formal description of procedures and requirements, potential authors should send a large (9 by 12 inch, 30.5 by 22.8 cm), self-addressed envelope, with 28 cents US postage affixed, to BYTE Author's Guide, 70 Main St, Peterborough NH 03458.

Articles which are accepted are purchased with a rate of up to $50 per magazine page, based on technical quality and suitability for BYTE's readership. Each month, the authors of the two leading articles in the reader poll (BYTE's Ongoing Monitor Box or "BOMB") are presented with bonus checks of $100 and $50. Unsolicited materials should be accompanied by full name and address, as well as return postage.


Circle 7 on inquiry card.

Circle 8 on inquiry card. →

TRS-80* Model I Computer Owners . . .



Double-density storage. It's really here!

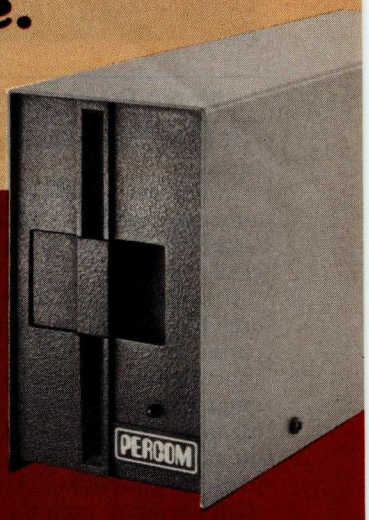

Here at Percom. And your authorized Percom dealers.

And double-density storage is here in a big way. Because now you can choose from *three different levels* of mini-disk systems — all *double-density rated.*

And get the storage that precisely meets your application needs.

Not to mention the service and quality that's made Percom the industry leader.

Although rated for double-density operation, all levels of Percom drives *work equally well in single-density* applications.

You can operate these drives in ordinary single-density format using TRSDOS*, Percom OS-80™ or any other single-density operating system.


Or, you can add a Percom DOUBLER™ to your Tandy Expansion Interface and store data and programs in *either* single- or double-density format.

Under double-density operation, you can store as much as *350 Kbytes* of formatted data — depending on the drive model — on one side of a five-inch minidiskette.

That's *four times* the capacity of standard Model I mini-disks, almost 100 Kbytes *more than* the capacity of the *eight-inch* IBM 3740 format!

Available in 1-, 2- and 3-drive configurations in all three model lines, Percom *burned-in, fully-tested* drives start at only $399.

TFD-40™ Drives



TFD-40 Drives store 180 Kbytes (double-density) or 102 Kbytes (single-density) of **formatted** data on one side of a 40-track minidiskette. Although economically priced, TFD-40 drives receive the same full Percom quality control measures as TFD-100 and TFD-200 drives.

TFD-100™ Drives




TFD-100 drives are "flippy" drives. You store twice the data per minidiskette by using both sides of the disk. TFD-100 drives store 180 Kbytes (double-density) or 102 Kbytes (single-density) **per side.** Under double-density operation, you can store a 70-page document on one minidiskette.

TFD-200™ Drives



TFD-200 drives store 350 Kbytes (double-density) or 197 Kbytes (single-density) on one side of a minidiskette. By comparison, 3740-formatted eight-inch disks store only 256 Kbytes. Enormous on-line storage capacity in a 5" drive, plus proven Percom reliability. That's what you get in a TFD-200.

the DOUBLER™ — This proprietary adapter for the TRS-80* Model I computer packs approximately twice the data on a disk track.



Depending on the type of drive, you can store up to four times as much data — 350 Kbytes — on one side of a minidiskette as you can store using a Tandy standard Model I computer drive.

Easy to install, the DOUBLER merely plugs into the disk controller chip socket of your Expansion Interface. No rewiring. No trace cutting.

And because the DOUBLER reads, writes and formats *either* single- or double-density disks, you can continue to run all of your single-density software, then switch to double-density operation at any convenient time.

Included with the PC card adapter is a TRSDOS*-compatible double-density disk operating system, called DBLDOS™, plus a CONVERT utility that converts files and programs from single- to double-density or double- to single-density format.

Each DOUBLER also includes an on-card high-performance *data separator circuit* which ensures reliable disk read operation.

The DOUBLER works with standard 35-, 40-, 77- and 80-track drives rated for double-density operation.

Note. Opening the Expansion Interface to install the DOUBLER may void Tandy's limited 90-day warranty.

Drive enclosures, power supplies Percom drive enclosures are finished in compatible silver enamel. Three sizes accommodate either 1, 2 or 3 drives. Drive power supplies are heavy duty, cool-running open-frame design. Three-wire ac power cords are safer, have lower noise pickup.

Free software patch This software patch, called PATCH PAK™, upgrades TRSDOS* for operation with improved 40- and 77-track drives. For single-density operation only.

Quality Percom products are available at authorized dealers. Call *toll free 1-800-527-1592* for the address of your nearest dealer or to order directly from Percom. Prices and specifications subject to change without notice.

™ trademark of Percom Data Company, Inc.

* trademark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

PERCOM

PERCOM DATA COMPANY, INC.
211 N. KIRBY • GARLAND TX • 75042
(214) 272-3421

Letters

Moore Praise Comes FORTH

If FORTH is trickery, give me more trickery.

In my view, FORTH is a common-sense approach to programming. Granted, there are also bits of pure genius thrown in.

It makes sense to put all the routines used by the operating system, compiler, parser, editor, etc, in one dictionary conveniently accessible to the user at all times. That is, if they will fit. One of the bits of genius of FORTH is that they do indeed fit with room to spare for user-defined routines. The result is instant liberation from the "systems man" who tries but can't please everyone. It is your computer, and with FORTH you have access to everything on it.

It makes sense to use a stack to pass parameters between routines and to separate this stack from the return-address stack. You end up with a language that is designed to compute rather than to be read. Every step in FORTH is directed toward computing a result. FORTH is a sequence of commands rather than statements as found in BASIC or Pascal. The functions of computing and documentation are separated. Hence I strongly disagree with Gregg Williams' advice (see August 1980 BYTE, page 130) that the user should introduce intermediate variables to improve readability. I concur with his objective, but I would encourage their use only in the commentary where they belong. There is no point to introducing unnecessary variables in the computing process. In the commentary, intermediate variables can and should be used very effectively to help describe the computations that are occurring on the stack without interfering with the process.

While FORTH takes away the expository statement, it does give back an important documenting feature, namely relative ease in preparing precise common-language definitions of each routine. All FORTH routines have a describable goal, and most of the action takes place on the stack. Hence FORTH routines tend to be simpler to describe. I have never seen a glossary for a language or operating system that comes even close to the completeness and conciseness of the fig-FORTH glossary supplied by the FORTH Interest Group. It is a gem, a complete English-language description of FORTH. Every routine on the computer is concisely defined in English.

You have to have faith that taking the sacred function of documenting out of the language and turning it over to the user to do as he sees fit will work. After a while, you begin to wonder if Milton Friedman didn't write FORTH for his television series *Free to Choose*.

Finally, it makes sense to give the programmer a shot at controlling the compiler, especially when the compiler has access to all the routines of the system. C H Moore has shown with FORTH that compilers do not have to be large inflexible systems which try to take into account every eventuality and really can't do it. The result of this bit of FORTH trickery is a powerful compiler so tiny that it can be made interactive and used on line with no batch processing, linking loader, or other monstrosity which we are accustomed to associate with a compiler.


How small (or big) is tiny? The fig-FORTH system supplied by the FORTH Interest Group for the 6502 contains 220 primitive routines (not including the Editor or Assembler) that occupy a total of 6221 bytes. By my count, 34 of these routines are compiler functions, and they occupy a total of 982 bytes. My guess is that this is an order of magnitude smaller than other compilers of comparable power. That is trickery.

If there ever is a contest for the all-time ingenious software development, I would like to nominate C H Moore's best, the { ;CODE } routine and/or its logical extension
{ <BUILDS ... DOES> }.

Edgar H Fey Jr
Edgar H Fey Jewelers Inc
1156 Fox Valley Ctr
Aurora IL 60505

Flash: Magic Exists!

I was delighted to see an issue of BYTE devoted to FORTH. As a user of and tinkerer with STOIC for 5 years, I heartily agree with the various authors' ravings about the extensibility, flexibility, and increase in productivity provided by FORTH. I was, however, amused at the many ways in which postfix (reverse-Polish) notation was rational-

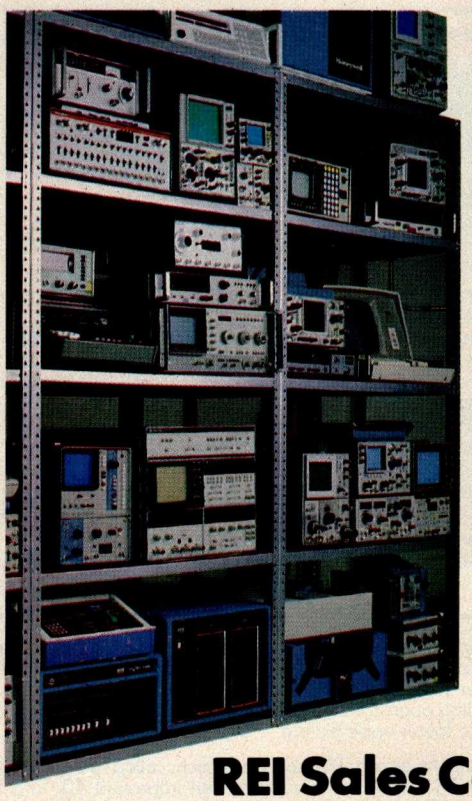

Thousands of "like new" products with money back guarantees.

REI Sales Company
(800) 227-8409
In California (213) 993-7368, (415) 968-8845 or (714) 879-0561

Circle 9 on inquiry card.

INTRODUCING THE NEW INTERTUBE III™



In late 1978, Intertec conceived the idea of the InterTube Video Display Terminal. Since that time, we've greatly enhanced its operation with the addition of many new exciting features. But perhaps the most significant announcement in the InterTube line of video terminals is our new InterTube III.

The new $895* InterTube III obsoletes dumb terminals and out-performs the smart ones. Powerful standard features include: a full 24 line by 80 character display, 128 upper and lower case ASCII characters, reverse video, complete cursor addressing and control, an 18 key numeric pad, user-defined function keys, blinking, a self-test mode, protected and unprotected fields, below-the-line descenders, automatic key repeat, twin RS232 serial ports and character and line insert/delete. Incredible!

InterTube III also boasts newly designed processor, video and power supply circuits. All in all, the InterTube III is what we believe to be the most powerful, reliable video terminal available today. And it costs less than its predecessor - our popular InterTube II.

InterTube III users will appreciate the many painstaking hours of human engineering which insure effortless operation without operator fatigue. InterTube III's new high resolution, non-glare CRT provides the sharpest possible display image. And our newly designed keyboard has that expensive "feel" you normally find only on terminals costing two to three times as much. But, most importantly, the InterTube III features state-of-the art design with just three easily removable modules. So, with only a common screwdriver, servicing is a snap!

Better yet, we've got a nationwide service network with outlets located in over 50 cities to provide fast and efficient on-site or depot maintenance. Plus, an extended warranty program is also available.

If you're an existing InterTube user, you no doubt have discovered the exceptional value the InterTube really is. And, if you're not, why not call or write us today for the name and address of your nearest InterTube III dealer. Intertec video terminals are distributed worldwide and may be available in your area now.

INTERTEC DATA SYSTEMS®

2300 Broad River Rd, Columbia, SC 29210
(803) 798-9100 TWX: 810-666-2115

*Quantity One - Dealer inquiries invited.

Circle 10 on inquiry card.

ized as being a better or more efficient way to do things even though it renders programs "write only" or at best difficult to read.

Since maintainability of programs becomes even more critical when productivity is increased tenfold or more, I feel that the requirement of postfix notation by FORTH is a serious shortcoming. There is nothing mystical about postfix notation; all compilers and interpreters must eventually reach this form because that is the order in which the computer must carry out its operations.

Over the past two years Jeff Morris and I have added various superstructures onto FORTH (one per application) that attempted to combine the better features of Pascal (eg: record structures, algebraic notation) with the power and flexibility of FORTH. The outcome of all of these experiments was a conceptual breakthrough which resulted in the invention of Magic. Magic has all the advantages of FORTH, plus, Magic programs are readable (thus maintainable).

For example, the FORTH (or Magic) statement:

```
B@ C@ + A@ * A!
```

can also be written in Magic as:

```
A:=A*(B+C)
```

and in fact compiles in three fewer words (since the @s are not needed), and the FORTH (or Magic) statement:

```
A@ B@ = IF
```

can also be written in Magic as:

```
IF(A.EQ.B)
```

Magic is a major enhancement to the basic compilation structure of FORTH (a metaFORTH), not simply an add-on superstructure. Magic programs typically compile more slowly (due to the increased complexity of the compiler) but require less memory and run faster than equivalent FORTH programs.

The concept of metaFORTH is discussed briefly in the article by Kim Harris. (See "FORTH Extensibility: or How to Write a Compiler in Twenty-five Words or Less," August 1980 BYTE, page 164.) This is the direction of the future and will be the source of some super-powerful programming tools in the next decade. Magic is a first step in that direction.

I hope and expect that new metaFORTH languages such as Magic will be developed so that FORTH users can have their cake and eat it too. The time has come to stop justifying the unreadability of postfix notation.

Arnold Epstein PhD
Director, Software Development
Octek Inc
7 Corporate Pl
S Bedford St
Burlington MA 01803

Needs Tektronix Secrets

Can a BYTE reader help me? I have a Tektronix 4051 computer which came with a BASIC interpreter. Some of my programs must run faster, and I would like to rewrite them in machine code. Tektronix states that machine code is unsupported on the 4051 and suggests spending another $10,500 for a faster Model 4052. Someone somewhere is programming the 4051 in machine code, as "Space Tag" on the demonstration tape is in machine code and runs incredibly faster than ordinary BASIC programs.

Richard Daily
800 Charlesgate Dr
St Louis MO 63122

Information Please

I recently acquired a Video Brain home computer built by A Umtech Company. The serial number is 003087 and the model number is 101A. It was built in either Santa Clara or Sunnyvale,

APPLE USERS!

Technicians! Hobbyists! Engineers! Repairmen!

NEW! 16 CHANNEL VARIABLE A-D BOARD!

Now you can digitally display, store, analyze and print your measurements!

The NEW ADC-16B A-D Board can be used for: POSITION MEASUREMENTS
PRESSURE MEASUREMENTS
PHOTOELECTRIC MEASUREMENTS
TEMPERATURE MEASUREMENTS
A COMPUTERIZED VOLT-OHM METER

YOU GET A COMPLETE SOFTWARE PACKAGE INCLUDING A TEST KIT, CALIBRATION METHOD AND VARIOUS APPLICATIONS! Only 179.95

This is a Variable Gain Board that allows increased measurements from 5 volts up to 100 volts.

CTA COMPUTER TECHNOLOGY ASSOCIATES

ORDER TODAY! Credit Card Users Call TOLL FREE!
1-800-854-2003 ext. 815 In California Call 800-522-1500 ext. 815

Computer Technology Associates
5812 Cromo Drive, Suite 102, El Paso, Texas 79912
Please rush me ____ NEW ADC-16B A-D Boards at the introductory price of 179.95 each.
☐ Check Enclosed ☐ MasterCard ☐ Visa ☐ Diners Club
Card No. _____ Exp. Date _____
Name _____
Address _____
City _____ State _____ Zip _____
Texas residents add 5% sales tax. Please allow 4-6 weeks for delivery.

Circle 11 on inquiry card. Circle 12 on inquiry card. →

Mountain Computer
can now
EXPAND
Your Apple II Peripheral Capacity
EXPANSION CHASSIS

Quality You Expect


Eight more slots for your Apple! Now you can bank-select eight more peripheral slots with immediate or deferred software commands—like having up to 16 peripheral cards "on line"—or use the Select/Deselect switch mounted on the front panel. Expansion Chassis' heavy-duty power supply is primarily for peripherals, without the heavy demand of motherboard support chips required in your Apple. This means much more power is available for peripherals than in your Apple itself! If you've run out of room in your Apple—Expansion Chassis is your answer. Drop by your Apple dealer for a demonstration, or contact Mountain Computer for the location of the dealer nearest you.

Performance You Demand

- Eight mirror image I/O slots of the Apple
- Fully buffered, bi-directional data lines
- Apple II compatible interface card
- Dual selection capability; hardware or software
- Immediate or deferred selection in software mode
- From BASIC, a single POKE command turns the chassis ON or OFF
- Compatible with all software
- Dedicated power supply with approved power transformer

Mountain Computer
INCORPORATED

300 Harvey West Blvd., Santa Cruz, CA 95060
(408) 429-8600 TWX 910 598-4504

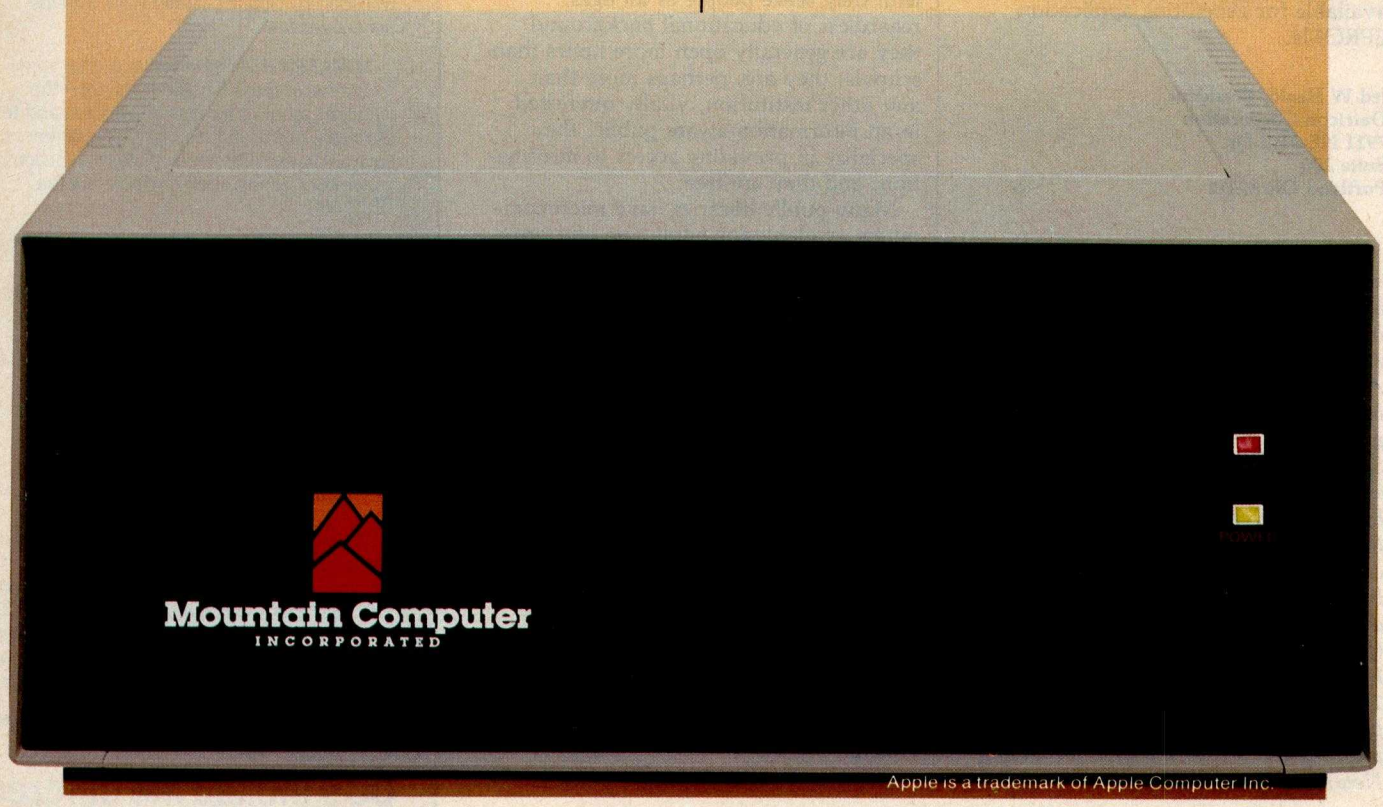

Apple is a trademark of Apple Computer Inc.

California. I understand it has a Fairchild F-8 8-bit microprocessor. It has 1 K bytes of programmable memory and 4 K bytes of read-only memory.

What I am looking for are cartridge programs, which have a 45-terminal bus, the expander sets, or anything that would be interchangeable. Also, any information or leads would be gratefully appreciated by me and my friends.

Richard L Rowland
7072 Kenwood
Las Vegas NV 89117

An Overlooked FORTH Vendor

The staff at Datricon Corporation was both delighted and disappointed with the August 1980 BYTE. Our delight stems from the extensive coverage of the language FORTH and Charles H Moore's interesting article, "The Evolution of FORTH, an Unusual Language," page 76.

However, we were disappointed with BYTE's failure to mention Datricon's ACS 12-PRO or Datricon's 4 K D-FORTH. Datricon's implementation of FORTH resides in 4 K bytes of EPROM (erasable programmable read-only memory), produces code that can be placed into ROM (read-only memory), and provides for interrupt handling and the automatic setting of the data-transfer rate. Our ACS 12-PRO, with D-FORTH and the STD BUS interface, is a very powerful 6800-based single-board computer. A development package is also available for generating application EPROMs.

Jed W Heald, President
Datricon Corporation
7911 NE 33rd Dr
Suite 200
Portland OR 97211

*We at BYTE were surprised to find additional FORTH vendors advertising in our August 1980 issue. Other vendors include Rockwell International (for the AIM microcomputer, see page 67 of the August 1980 BYTE), Kenyon Microsystems (for 6809 systems, see page 104 of the same issue), Sirius Systems (for the Radio Shack TRS-80, see page 171), Quality Software (for the Exidy Sorcerer, see page 208), Eric Rehnke (for the KIM, SYM, and AIM computers, see page 290), the Software Farm (for the TRS-80, see page 292), and Professional Management Services (for the Alpha Micro, see page 294). FORTH vendors not listed in the August 1980 BYTE are invited to submit a two-paragraph product release, which will be published in a future BYTE "What's New?" column....***GW**

FORTH Is Better Than LISP, He Cs

Unlike BYTE's earlier issue on LISP, the August issue on FORTH did an excellent job in making this intriguing language readily understood. The articles did not come right out and say that FORTH is so machine-efficient due to the user preprocessing his logic into postfix notation, but most readers should realize this.

Although I can tolerate that sort of notation for a desk calculator, it is unbearable for computer data processing. Although the C language is philosophically different, it is a threaded language which is much preferable.

Dick Sims
185 Freeman St, Apt 951
Brookline MA 02146

Check Out a Computer

I always look forward to the new issue of BYTE and was especially eager to read the July 1980, Computers and Education issue. Arthur Luehrmann's article, "Computer Illiteracy—A National Crisis and a Solution for It," page 88, struck home on a point with which I wholeheartedly agree: "this country's general public is woefully ill-prepared to live and work in the Age of Information."

I was, however, disturbed by the fact that the role of public libraries was never mentioned. Public libraries are in a unique position to help solve the problem: they serve people of all ages, regardless of educational background; they are generally open more hours than schools; they are, perhaps more than any other institution, vitally interested in an information-aware public; they specialize in providing access to information, and they are free.

Many public libraries have microcomputers available for public use and provide a complement of interactive programs for individuals to learn with. Libraries that have done this report extensive and enthusiastic use of the equipment.

It's a sorry fact that most people have just never had the opportunity to even see a computer system. Until the opportunity to see, touch, and use computers is afforded, computers will remain shrouded in mystery for the vast majority of people of all ages. The public library is one of the best hopes we have to alleviate this problem.

Carlton A Sears
Adult Services Coordinator
Asheville-Buncombe Library System
67 Haywood St
Asheville NC 28801

Letters continued on page 122

A growing line of tools to expand the Apple

7440A Programmable Interrupt Timer Module. Time events in four operating modes—continuous, single shot, frequency comparison, and pulse width comparison. Includes three 16-bit interval timers, plus flexible patch area for external interface. Programmable interrupts, on-board ROM, and much more.

7720A Parallel Interface. Two bi-directional 8-bit I/O ports will connect your Apple to a variety of parallel devices, including printers, paper tape equipment, current relays, external on/off devices. Full featured, programmable interrupts, supports DMA daisy chaining.

7811B Arithmetic Processor. Interfaces with Applesoft, so you just plug in and run. Based on the AM 9511 device, provides full 16/32-bit arithmetic, floating point, trigonometric, logarithmic, exponential functions. Programmed I/O data transfer, much, much more.

7710A Asynchronous Serial Interface. Conforming to RS-232-C A thru E 1978 standard, this card will drive a variety of serial devices such as CRT terminals, printers, paper tape devices, or communicate with any standard RS-232 device, including other computers. Full hand-shaking, and fully compatible with Apple PASCAL!

7470A 3½ BCD A/D Converter. Converts a DC voltage to a BCD number for computerized monitoring and analysis. Typical inputs include DC inputs from temperature or pressure transducers. Single channel A/D, 400 ms per conversion.

7490A GPIB IEEE 488 Interface. A true implementation of the IEEE 488 standard—the standard protocol for instrumentation and test devices. Control and monitor test instruments such as digital voltmeters, plotters, function generators, or any other device using the IEEE 488.

7114A PROM Module. Permits the addition to or replacement of Apple II firmware without removing the Apple II ROMs. Available with on-board enable/disable toggle switch.

7500 A Wire Wrap Board. For prototyping your own designs.

7510A Solder Board.

7590A Extender Board.

7016A 16K Dynamic Memory Add-On.

Watch this space for new CCS products for the Apple. We've got some real surprises in the works. To find out more about the CCS product line, visit your local computer retailer. The CCS product line is available at over 250 locations nationally, including most that carry the Apple. Or circle the reader service number on this ad.

Apple II, Apple II Plus, and Applesoft are trademarks of the Apple Corporation.

CCS makes the difference

Circle 13 on inquiry card. →

We see the Apple a little differently.



We see it as a good way to get things done.

Apple has built a great computer. We at CCS have built a great line of peripherals and components to expand the Apple. To do almost anything you want to get done with a computer.

If you want to do business with an Apple, we've got tools to connect the Apple to standard business printers and terminals. Or to modems, for communications over telephone lines, with other computers, even with other Apples.

If you want to apply your Apple to engineering, scientific, or graphic projects, we've got tools for high-powered, high-speed math functions, and fast, high resolution graphics. And tools to connect the Apple to lab test equipment like function generators or plotters.

And we have tools to connect the Apple to the outside world, including A/D converters and interval timers with external interface.


We make components for the S-100 bus, the PET, and the TRS-80, too. We built our products to deliver hard-nosed value to the OEM, and to the inventor who knows the best, at prices that are unbeaten.

To find out how much computer your Apple II can be, see things our way. Because for serious users with serious uses for the Apple, we've got the tools.

California Computer Systems
250 Caribbean Sunnyvale, CA 94086 (408) 734-5811

The Future of Computer Graphics

Bruce Eric Brown
and
Stephen Levine
Lawrence Livermore National Laboratory
University of California
POB 808
Livermore CA 94550

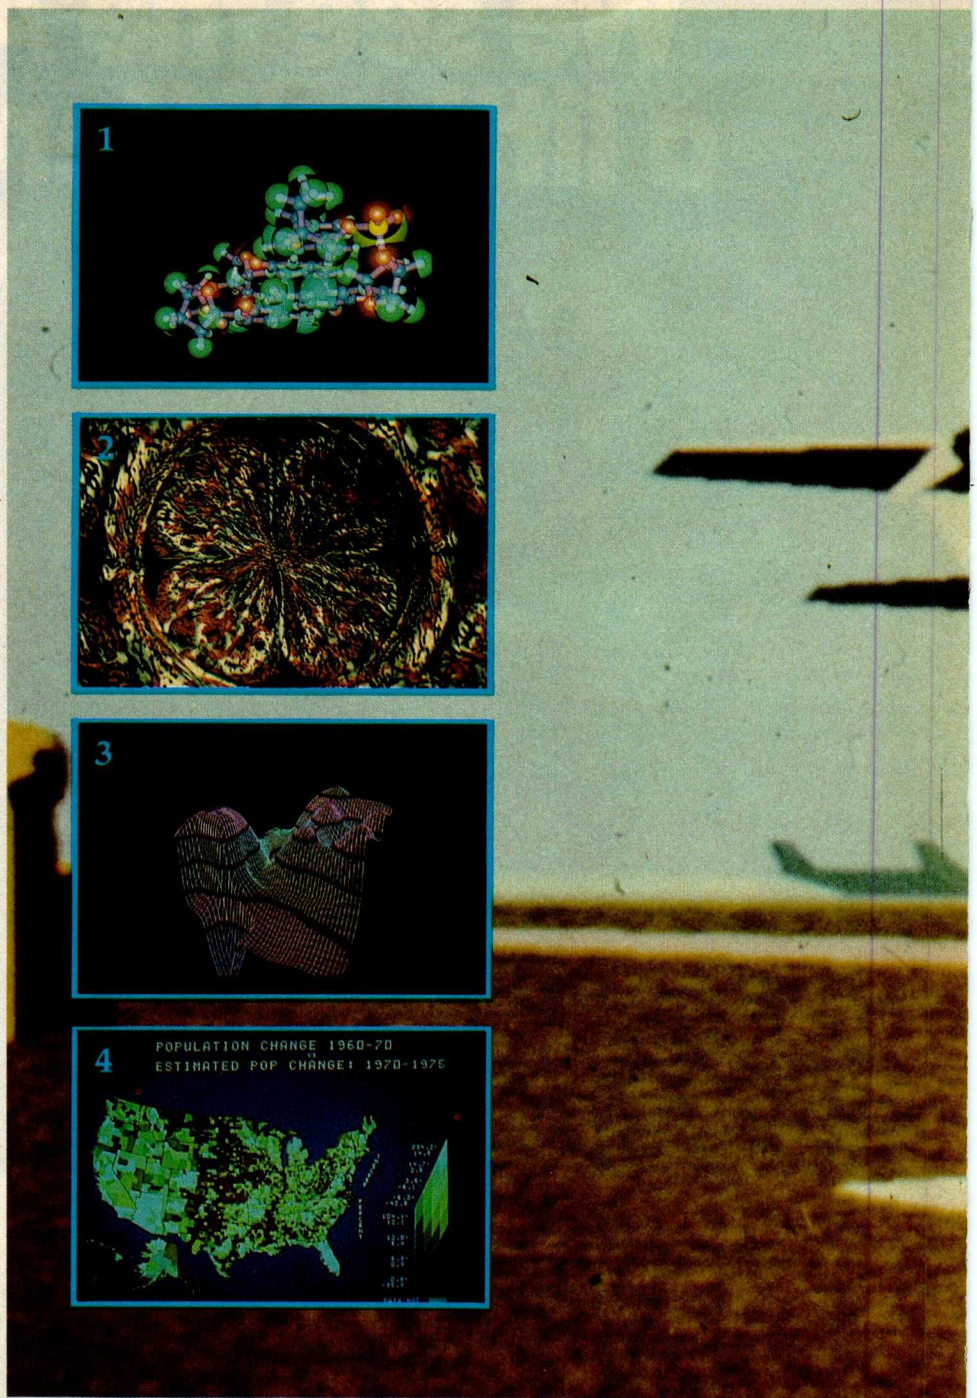

Predicting the future can place one in a very precarious position. Although technology is moving forward at such a pace that it is almost impossible to look a long way down the road, we *do* have a good idea of what the *near-future* trends will be. So here I will discuss where the trends in computer-generated graphics are headed.

Computer graphics is the fastest-growing segment of the computer industry. Although many existing computers already have graphics capabilities, the future is even brighter. Since personal computer users will make up the largest percentage of the computer graphics market, the standard color television receiver will be the most common display device. Research is continually going on in video-generation techniques, and we can expect the quality of video images to improve dramatically.

Also on the horizon is the use of networks. Best of all, the price of graphics systems should continue to fall, and as they do, the number of applications will increase drastically.

Three Dimensions

This is an exciting time for experimentation with computer graphics. Looking into our crystal video display, we can see many changes coming within the next few years. True three-dimensional displays will become common. Researchers will finally be able to see their models in three dimensions without the need of special glasses, stereo pairs, or by viewing two-dimensional projections.

Already in existence are integral hologram displays made from computer-generated images. (An example is shown in photo 9.) The

Editor's note:
*It was only 5 years ago when the first annual computer graphics show was held. The Philadelphia show was sponsored by SIGGRAPH (the Association for Computing Machinery's Special Interest Group on Computer Graphics). At that time, the show attracted ten vendors and a few hundred visitors. SIGGRAPH-80, which was held this summer in Seattle, brought to that city over 100 vendors, about 6000 visitors, and filled twenty-four times the space of SIGGRAPH-75. So you can surmise how the the computer graphics field will continue to grow....***SM**



Photo 1: *A computer-generated composite view of a DNA molecule using both ball-and-stick and space-filling models. Using keyboard control, the configuration of the model can be changed and it can be rotated in any direction. Such models are already assisting scientists in their research and will have an even bigger role in the coming years. Photo courtesy of Nelson Max, Lawrence Livermore National Laboratory.*

Photo 2: *Computer-generated art by Los Angeles artist David M. As you can see, computer graphics could revolutionize the world of art.*

Photo 3: *A perspective view of a two-dimensional array of numbers. Photo courtesy of Melvin L Prueitt, Los Alamos Scientific Laboratory.*

Photo 4: *Census data plotted to show population changes. This is an example of the type of material which could be available on a computer network with wide-band capabilities, such as cable television. Courtesy of Edward Zimmerman, White House.*

Photo 5: *A ground-level view of a computer-generated airport scene used in a real-time flight simulator. Photo courtesy of Marconi Radar Systems.*

holograms are made by photographing 1080 computer-generated images on 35mm film and transferring them to the hologram. In a few years it will be possible to generate these directly; we might even see a laser-driven, computer-controlled, holographic-image output device.

There are currently several methods in use for displaying three-dimensional television images, but the most promising uses an interlaced television picture. The even scan lines display an image for viewing with the right eye and the odd scan lines have an image for the left eye. The screen is viewed through a pair of glasses whose lenses are made with PLZT (lead lanthanum zirconate titanate) ceramic. Voltage pulses synchronized with the display of the odd and even fields darken the left and right lenses alternately. As a result, the viewer sees a true three-dimensional image. Photo 10 is a composite view of a display showing the images for both the left and right eyes.

Raster-Scan Displays

Low-priced memory will also change the look of computer graphics. Up to the present, the market has been dominated by storage tubes and calligraphic (ie: stroke-writing) displays; however, raster-scan displays can be refreshed from a frame buffer of semiconductor memory. Therefore, in the coming years, we can expect the graphic-terminal market to be dominated by raster-scan devices. The standard display will be a color television receiver connected as a mirco-processor-controlled intelligent terminal. The cost of some of these graphics terminals will be at or near the cost of a modern color television receiver.

Raster-scan color television will probably be the graphics standard for the following reasons:

- The US video standard is well established.
- It has a large industry supporting it.
- The cost of developing another standard is prohibitive.
- The great numbers of personal computer users will help determine the trend. Why buy a color output monitor when you already have one or several available at home?

Top-of-the-line video displays will include devices with 1000-line resolution (already available) as well as a number with 2000-line resolution. The cost of these will be significantly higher than that of a modern color television receiver.

On a raster-scan display, each dot on the screen is known as a picture element or pixel. Since each pixel is displayed 30 times a second, the image generator must either generate 30 Hz or store the pixel intensities in memory. Frame-buffer systems usually use dual-ported memory which both stores the image and refreshes the display.

To simplify things, let's assume a square picture with the standard 500 lines and each line containing 500 pixels. To display a completely black-and-white line image with no shades of gray we would need 250,000 (500 by 500) bits or 32 K bytes of memory. In order to display gray levels, the number of bits used for each pixel must be increased. To display color, we either divide the number of bits available among the three primary colors (red, green, and blue) or use a color map. A color map takes each pixel value stored and outputs the three intensities: the most common method is to use 1 byte input and 3 byte output. The number of colors which can be displayed is the product of the number of output intensities for each color. At a given time, only a subset, which is limited by the input values, can be displayed. If we use 8 bits in, 24 bits out, we can display any 256 colors of the 16,777,216 available.

In the near future we should be seeing 2000-line resolution systems with 24 bits per pixel (1 byte for each of the three primary colors and 12 bits per color in the map). 12 megabytes of memory would be needed for such a system. With memory prices expected to continue to fall, in about 5 years the major cost element of such a system would be the monitor and electronics.

Vector Displays

Although it appears that raster-scan displays will have the major share of the graphics market, line-drawing (ie: vector-display) systems will continue to grow, though at a slower rate. There are basically two types of line-drawing systems: the storage tube and the refresh calligraphic writer.

Storage tubes available today have higher resolution and greater image stability than most refresh systems. One disadvantage of the storage tube is the lack of selective erasure. In order to remove one line the entire screen must be erased and redrawn. With refresh displays the line is removed from the display list and the line is redrawn on the next refresh cycle.

Calligraphic displays can display about 20,000 three-dimensional vectors or 100,000 two-dimensional vectors at 30 Hz. In the next few years we can also expect a doubling of these capacities.

Raster-scan display buffers can also be used to display vector images and should begin to replace calligraphic displays as faster hardware becomes available. Many users will probably prefer the somewhat slower speed of the raster scan since they are able to display continuous-tone color images.

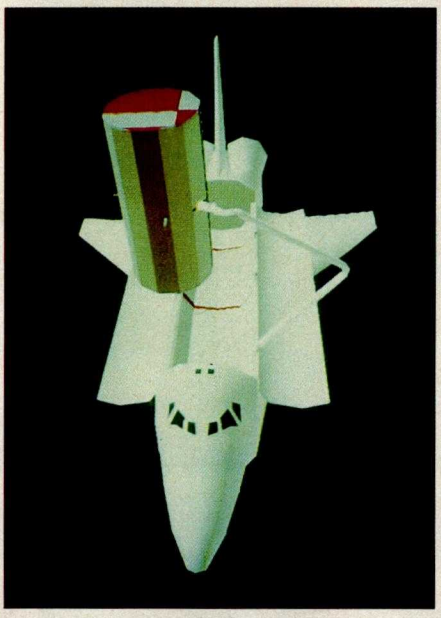


Photo 6 (above): *An example of the computer-generated graphics used to train space-shuttle pilots at the Johnson Space Center in Houston, Texas.*

Photo 7 (below): *The control panel for an experimental fusion reactor at Lawrence Livermore National Laboratory. Transparent touch panels mounted over the color video displays have eliminated most switches. To control the reactor, the operators need only to touch the screen over the desired control area shown on the screen. Photo courtesy of Glenn Spreckert.*



Input

One tool which should see much use in the future is a transparent touch panel mounted over the face of a video screen. As shown in photo 7, an automated nuclear-reactor control room is one of the many possible applications. (Note the lack of switches.)

Hard Copy

Currently, one of the major problems of graphic terminal users is how to satisfactorily get hard-copy output. The most common method is to use a camera to take a picture of the video screen. A device is also available which records the video output directly on film. Both of these methods leave much to be desired. The final solution may not necessarily come from the manufacturers of graphic terminals. The goal of copying machine companies is a dry method of putting a color image on a piece of paper (like the current, dry black-and-white-image method). At present, the device with the highest-quality color output is the film recorder. For raster output devices, the resolution of current recorders is 4000 by 4000 pixels, each with a range of 256 intensities. These devices use

Circle 14 on inquiry card. →

Hard and Fast...




...Bulk Storage from Industrial Micro Systems

THE NEW MODEL 16

The new Industrial Micro Systems Model 16 Hard Disk Subsystem is a "fixed-removable" high speed, bulk storage device providing from 32 megabytes (32 million characters) to 96 megabytes of on-line storage for the Industrial Micro Systems 8000 or Series 5000 microcomputer systems. The Model 16 includes a credenza enclosure that provides a quiet, strong and attractive package for office or industrial applications where large memory is required. The Model 16 also includes a fully buffered DMA S-100 bus controller for fast and easy interfacing.

WINCHESTER TECHNOLOGY WITH BUILT-IN BACKUP

The Model 16 includes a 16 megabyte removable cartridge and a 16, 48, or 80 megabyte fixed media that employs Winchester 3340 technology. Files and programs may be copied between the fixed media and the removable cartridge for fast, easy backup and archival storage.

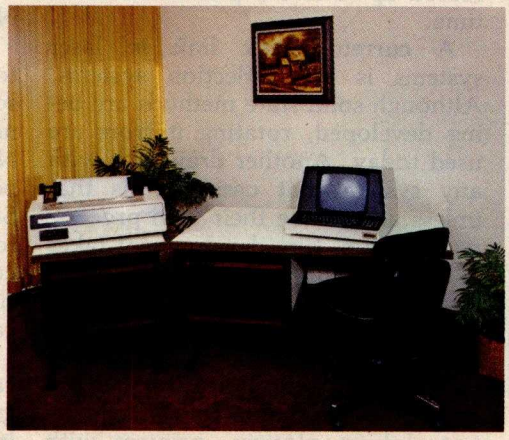

FAST ACCESS

The interface between the Model 16 hard disk and the Industrial Micro Systems computer is provided by the Hard Disk Controller. The Hard Disk Controller utilizes Direct Memory Access (DMA) for fast data transfer with minimum processor intervention. The maximum data transfer rate is 1.2 megabytes per second and the controller fully buffers the data, a sector at a time, to and from the disk. **Available in 220 V, 50 HZ Versions**

Now you don't have to look hard for fast computing power. Contact your Industrial Micro Systems Dealer today.

INDUSTRIAL MICRO SYSTEMS

Marketing
628 N. Eckhoff, Orange, CA 92668
(714) 978-6966

Manufacturing
2800 Lockheed Way, Carson City, NV 89701
(702) 883-7611

See us at Comdex '80 Nov. 18-21, 1980 Las Vegas Convention Center.

as many as seven filters and multiple passes are made on the film to create full-color images. Additive-color red, green, and blue filters or subtractive-color yellow, cyan, and magenta filters are used. In both systems, the seventh color is neutral for plotting black-and-white images. We can expect to see more of these recorders available in the near future, and some of the stripped-down models should be available at lower prices.

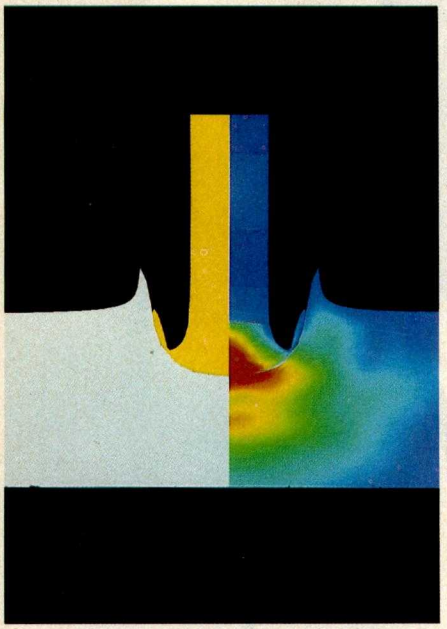


Photo 8: *A problem in hydrodynamics illustrated through the use of computer graphics. The photo is part of a series illustrating a steel rod impacting a steel plate. Color changes represent areas of varying stress. In the future, such graphics will be widely used in education. Photo courtesy of Lawrence Livermore National Laboratory.*

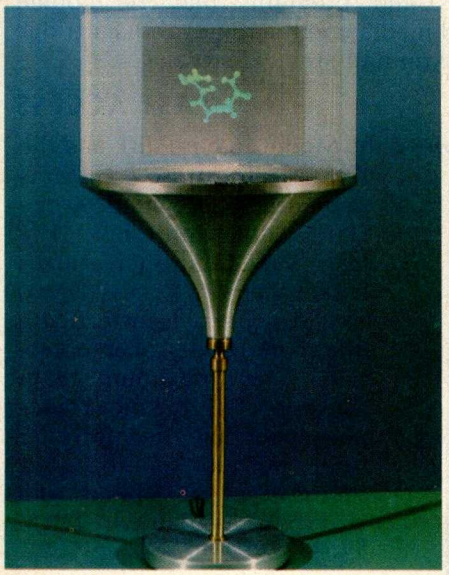


Photo 9: *Integral hologram of a molecule created by photographing 1080 computer-generated images on 35mm film and then transferring them to a hologram. In the future computers will be able to generate holograms directly. Photo courtesy of Donald L Vickers, Lawrence Livermore National Laboratory.*

Another group of devices which fit into this category of film output are COM (computer-output-on-microfilm) devices. Many of those currently available have graphic capability as well as variable intensity. At the present time, COM devices are mainly used for alphanumeric-fiche output. Currently only black-and-white machines are available, although color-fiche machines are expected to be produced in the future. The most important consideration is the need for high-quality, large-format color images. The resolution of current COMs is about 32,000 by 32,000 pixels. Although higher resolution is theoretically possible, such devices will not be produced until a need for them is demonstrated.

Laser recorders may soon capture a portion of the expanding graphics market. Since a laser beam has much more energy to deposit on film than a CRT (ie: video display) image, laser recorders will be much faster than existing methods. On a modern film recorder, one full-intensity pass at 4000 by 4000 pixels takes about 1 minute. To record the same amount of data, the laser requires 1 second or less. The energy of a laser beam is great enough that a split beam could record up to five copies at the same time.

A current weak link in laser systems is the deflection systems. Although solid-state methods are being developed, rotating mirrors are used today. Another drawback with any system that uses film is that unless users have their own processing facilities, film development takes at least 24 hours and sometimes much longer.

The Xerox 6500 color copier can be interfaced to a number of terminals for image-recording, or it can be connected to computers for direct output. Ink-jet plotters, printers with color ribbons, and flat bed-drum plotters with color pens are included in this class of output devices. Continued improvements in speed and color reproduction can be expected.

The brightest future is for the video disk. Today, these devices can hold 50 minutes (180,000 frames) of video per disk. Although the initial cost is high, the great number of frames available makes this device the ideal output and storage medium.

Computers — The Future

Although so far I've concentrated on graphics hardware, what about the future of the beast behind the display — the computer?

It seems likely that within a few years the home computer user will have a choice of several 32-bit virtual machines with at least a million words of expandable, central memory, and 100 million words of disk space. This type of system will be ideal for a color-frame buffer system.

Applications

Since pictures are a very efficient means of communication, the future applications of computer graphics are virtually unlimited. Photo 6 is a photograph of computer-generated graphics used to train space-shuttle pilots. Within the next few years, games and simulations with graphics of nearly the same quality will be available to the personal computer user. The PLZT glasses described earlier will be used to provide three-dimensional images for the would-be space-shuttle or 747 pilot. You can also expect the technology to be put to use in amusement parks. The Disneyland people have already used computer-generated graphics in some of their attractions and are continuing to develop them for future use.

Networks

There are a number of advantages to having your own, isolated personal computer, but connecting it to a network opens up a vast new world. Networks designed specifically for personal computer users, such as The Source, are already in existence. Unfortunately, the narrow bandwidth of conventional voice-grade telephone lines severely limits graphic capabilities.

One future possibility is the use of cable television for networks with graphic capabilities. Cable is increasingly available in all but the most rural areas and has wide bandwidth, portions of which are not used. Personal computer users could tap into this resource and use the extra bandwidth for local communication nets.

Another possibility is to have the

Circle 15 on inquiry card. ⟶

ATARI®: PERSONAL COMPUTER SYSTEMS THAT GROW WITH YOU



Start with a better computer. Atari computers have built-in capabilities you can't even add onto many other personal computers. Three programming formats (ROM cartridge, disk and cassette). A 57 key upper/lower case ASCII keyboard with 29 keystroke graphics symbols. 128 colors and hues. Four separate sound channels and a built-in speaker. Four controller ports. A built-in RF modulator and FCC approval for connection to any TV. Plus, nationwide Atari Authorized Service Centers. And more.

Add memory. The ATARI 800™ is supplied with 16K of memory. You can expand up to a full 48K of RAM with 8K or 16K Memory Modules™ you install yourself. In less than a minute. The ATARI 400's™ 8K of RAM may be expanded to 16K at Authorized Service Centers. Both may be expanded to 26K of ROM with slip-in ROM cartridge programs.

Add peripherals. The ATARI 410™ audio-digital program recorder. Single or dual density* disk drives. The ATARI 800 individually addresses up to four drives. Add the ATARI 850™ RS232 Interface Module. Add high speed 40 or 80-column printers. Add an acoustic modem for remote data access. Add a light pen.* And there are more Atari peripherals on the way.

Add programs. Choose among dozens of programs in Atari's rapidly expanding software library. Programs categories include:

- **Personal Finance & Record Keeping**
- **Personal Interest & Development**
- **Professional Applications**
- **Education**
- **Information & Communication**
- **Entertainment**
- **Programming Languages**
- **Small Business Accounting**

Add it up. With Atari, you start with more. And you can build to more. Because Atari offers you personal computer systems that grow with you. Ask your Atari retailer to give you a full demonstration of Atari computers, peripherals and programs. Complete systems. Because when other people were thinking hardware and software, Atari was thinking systems.

*Available Fall, 1980


ATARI®

PERSONAL COMPUTERS

1265 Borregas Avenue, Sunnyvale, CA 94086

Call toll-free (800) 538-8547 (Except Alaska and Hawaii)
(In California: (800) 672-1404) for the name of your nearest Atari retailer.

©1980, Atari, Inc.
A Warner Communications Company
Atari reserves the right to make changes to products or programs without notice.

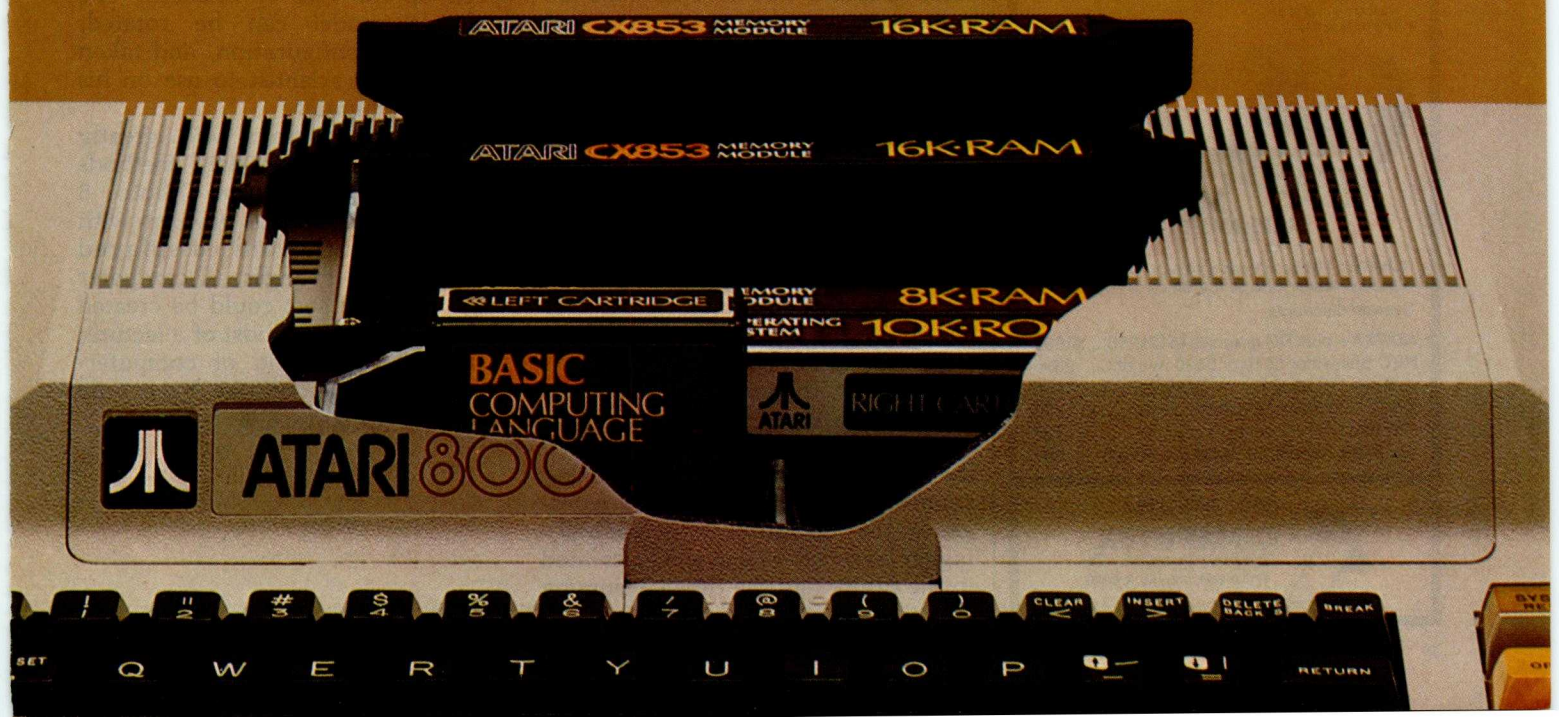

Circle 16 on inquiry card.

New Z8000

The System X8000 **MICRO-MINI™** based on the 16-bit Zilog Z8000 processor is available for **immediate delivery.**

FEATURES (partial list)
- Zilog Z8000 CPU
- Intel Multibus compatible
- Unique memory management system allows up to **16 megabytes** of memory
- Optional 9511 arithmetic processor
- 8-level vectored + non-maskable interrupts
- Two programable timers
- On-board monitor ROM option
- Full "Multimaster" capabilities allow multiple processors and/or DMA devices on the same bus
- Flexible and/or hard disk controller
- Powerful disk-based operating system
- Memory boards: 16K, 32K, 48K, 64K, 96K, 128K
- 15-slot backplane
- Heavy-duty switching power supply
- Industrial quality throughout

Prices start from $998. System discounts. Call for prices on complete custom systems.

SYSTEM X9020
(CPU Manual $19.95)



$4195* The **SUPER-MICRO™** **READY TO RUN**

SYSTEM FEATURES (partial list)
Pascal MICROENGINE™ X9000
- 16 bit P-code CPU
- 64K bytes RAM/Full DMA
- Floppy disk controller (SS or DS)
- Floating point hardware (IEEE standard)
- System software with enhancements
- 2 serial, 2 parallel ports
- Pascal compiler, text editors, file manager, CPU & memory diagnostics, symbolic Pascal debugger, linker, utilities and more.

Floppy Disk Drives (2)
- 1M combined memory
- Double density, single sided
- Standard 8" diskettes
- 6 ms track to track



$900* With CPU

MODEL X-920
DISPLAY/EDIT TERMINAL

***LIMITED TIME cash price.** 10% DOWN guarantees priority. **Master Charge & VISA** cards accepted.

System discounts

ADM3A+ plus RG graphics (512x256)	$1995
NEC Spinwriter 5510 or 5530 w/trac	2895
Anadex DP-9500 printer (60dpi)	1595
X-912 CRT (less 18 function keys)	799
P-E 550 CRT ("Bantam")	740
Siemens standard 8" drive (ss/sd-dd)	399

312 684-3183
TM **COMPUTEX**
Microcomputer Systems
5710 Drexel, Chicago, IL 60637

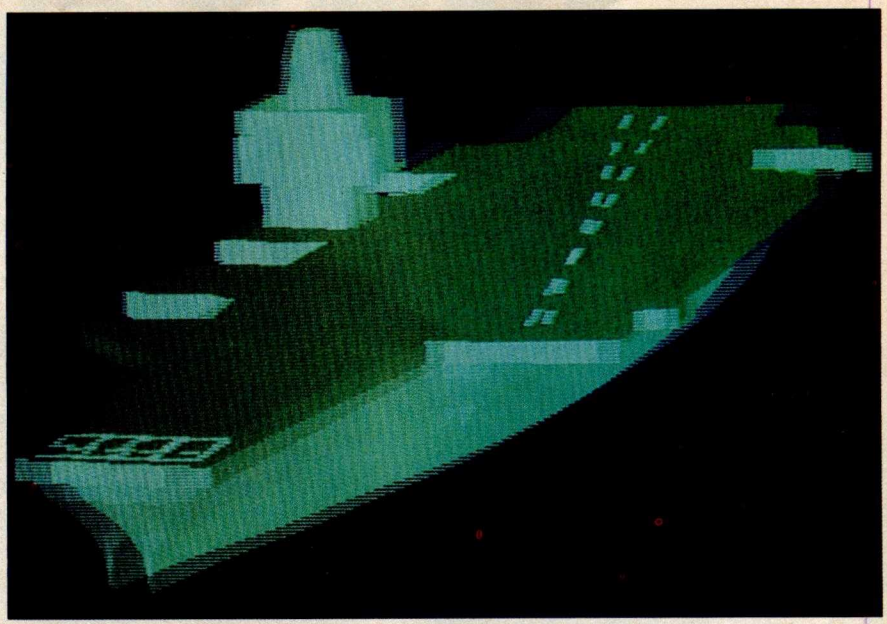


Photo 10: *Interlaced left-eye and right-eye view of a computer-generated image of an aircraft carrier. The image is viewed in three dimensions when the user wears glasses with lenses made of PLZT (lead lanthanum zirconate titanate) ceramic. The lenses by the right and left are darkened alternately by voltage pulses synchronized to the display. Photo courtesy of John A Roese and Larry E McCleary, the Naval Ocean Systems Center.*

cable-television company provide a main computer to control the network and act as a data base. The range of services which could be provided is virtually limitless. An example is shown in photo 4, where census data has been plotted to show population changes.

Exploring the Future

Computer graphics have exciting possibilities as an artistic medium. It's been said that computer-generated color graphics will revolutionize art in the same way that acrylics changed the world of artists who once worked with oil paints. Photo 2 shows computer-generated art by Los Angeles artist David M.

The simulators discussed earlier will also be widely used by filmmakers. Special effects, instead of being animated one frame at a time, could be programmed and filmed in real time. For instance, a director could ask for an airport scene on a clear day, as in photo 5. By changing a parameter, the same scene could be created on a foggy day.


The motion picture industry is in the forefront of developing and using sophisticated systems for computer-generated graphics. Increasingly higher levels of realism will be created in the future and the time-consuming tasks of creating special effects and editing will be performed using laser scanner/recorders and video disks. In terms of dollars, the movies will be one of the largest users of computer graphics for the near future.

Applications, as we've seen, are limited only by our present imaginations. Photo 1 shows a computer-generated composite view of a DNA (deoxyribonucleic acid) molecule using *both* ball-and-stick and space-filling models. Such displays will speed up the rate of research. The molecule model can be rotated, changed in configuration, and taken home for the scientist to use on his personal computer.

Classroom displays will greatly surpass the audio-visual methods commonly used today. Photo 8 shows a hydrodynamic problem with impact calculations displayed through color changes. A computer display of this sort could be created and updated in the midst of a lecture.

In the wide world of computer-graphic applications, we have only scratched the surface. ■

THE UNBEATABLE S-100 MEMORY

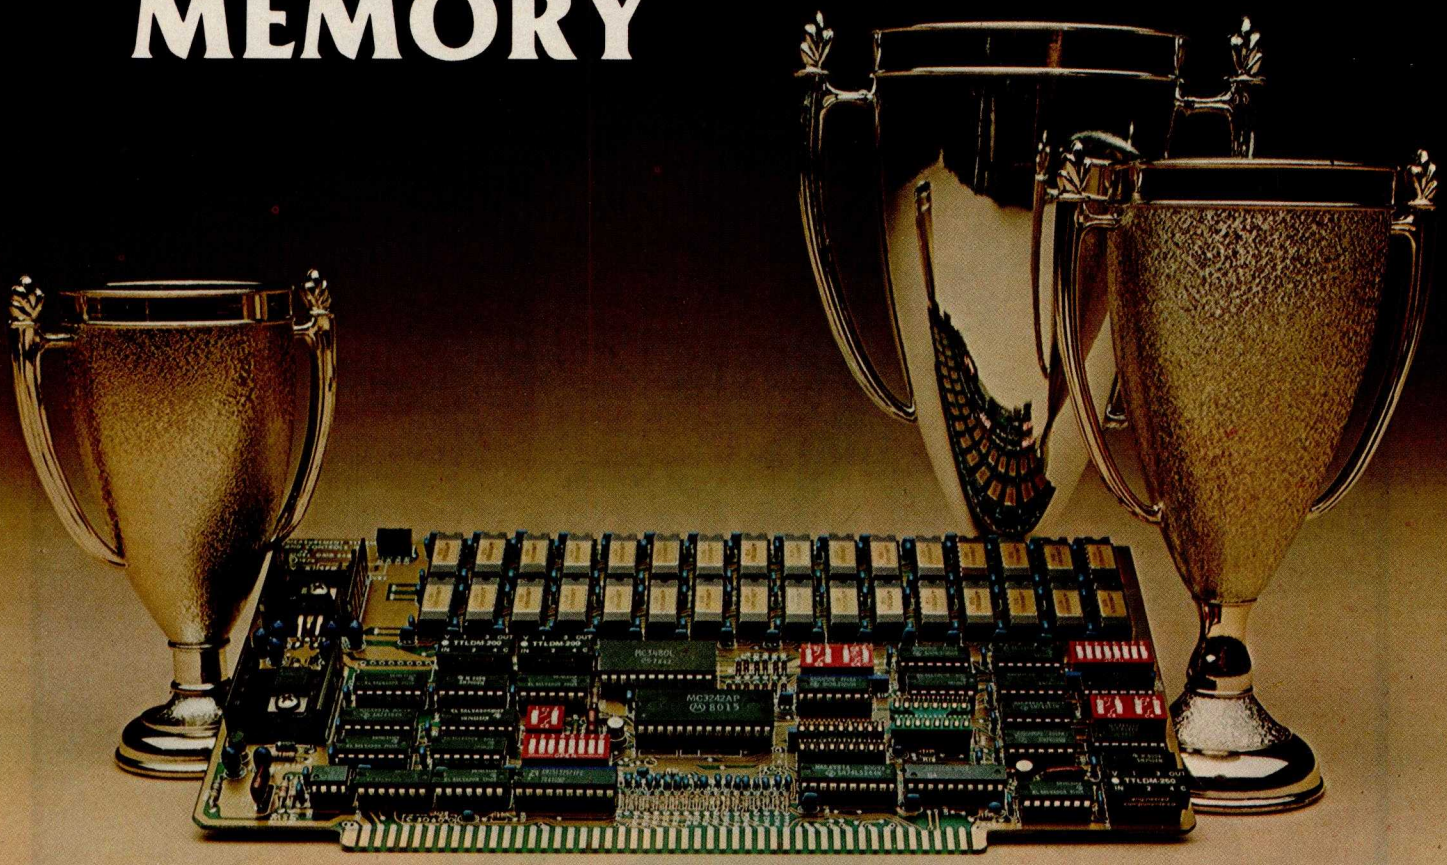

That's the MEASUREMENT systems & controls DMB Series of S-100 bus memory modules, fully compatible with **ALPHA MICRO, CROMEMCO, NORTH STAR, MP/M,** and most other S-100 systems.

Definitely a winner, the DMB Series is available with Bank Select (DMB6400) or without (DM6400) and utilizes industrial quality construction, provides outstanding reliability, and is backed by dedicated customer service and a one year guarantee.

The DMB6400 uses I/O port addressing for the bank select feature. A switch provides the ability to select any one of the 256 I/O ports for addressing the memory banks. The memory is configured as four totally independent 16K software selectable banks, with each bank addressable on any 16K boundary.

Outstanding features such as those listed below make the DMB series the UNBEATABLE S-100 Memory.


- Four independent 16K software selectable banks.
- Each bank is independently addressable on any 16K boundary.
- Switch selectable bank sizes — from 16K to 64K in 16K increments.
- Eight banks (512K) per I/O port for each of the 256 ports.
- Z-80 4MHz operation with no wait states using transparent refresh.
- On-board diagnostic LED's.
- Low power — 8 watts maximum.
- Reliable, tested and burned-in memory.
- IEEE S-100 compatible timing.
- One year guarantee.
- Attractive Dealer & OEM Prices.

See your nearest computer dealer, or contact us for the complete story on the UNBEATABLE S-100 Memory.

Systems Group

A Division of MEASUREMENT systems & controls incorporated

867 North Main St. / Orange, Calif. 92668 / (714) 633-4460
TWX/TELEX: 678 401 TAB IRIN

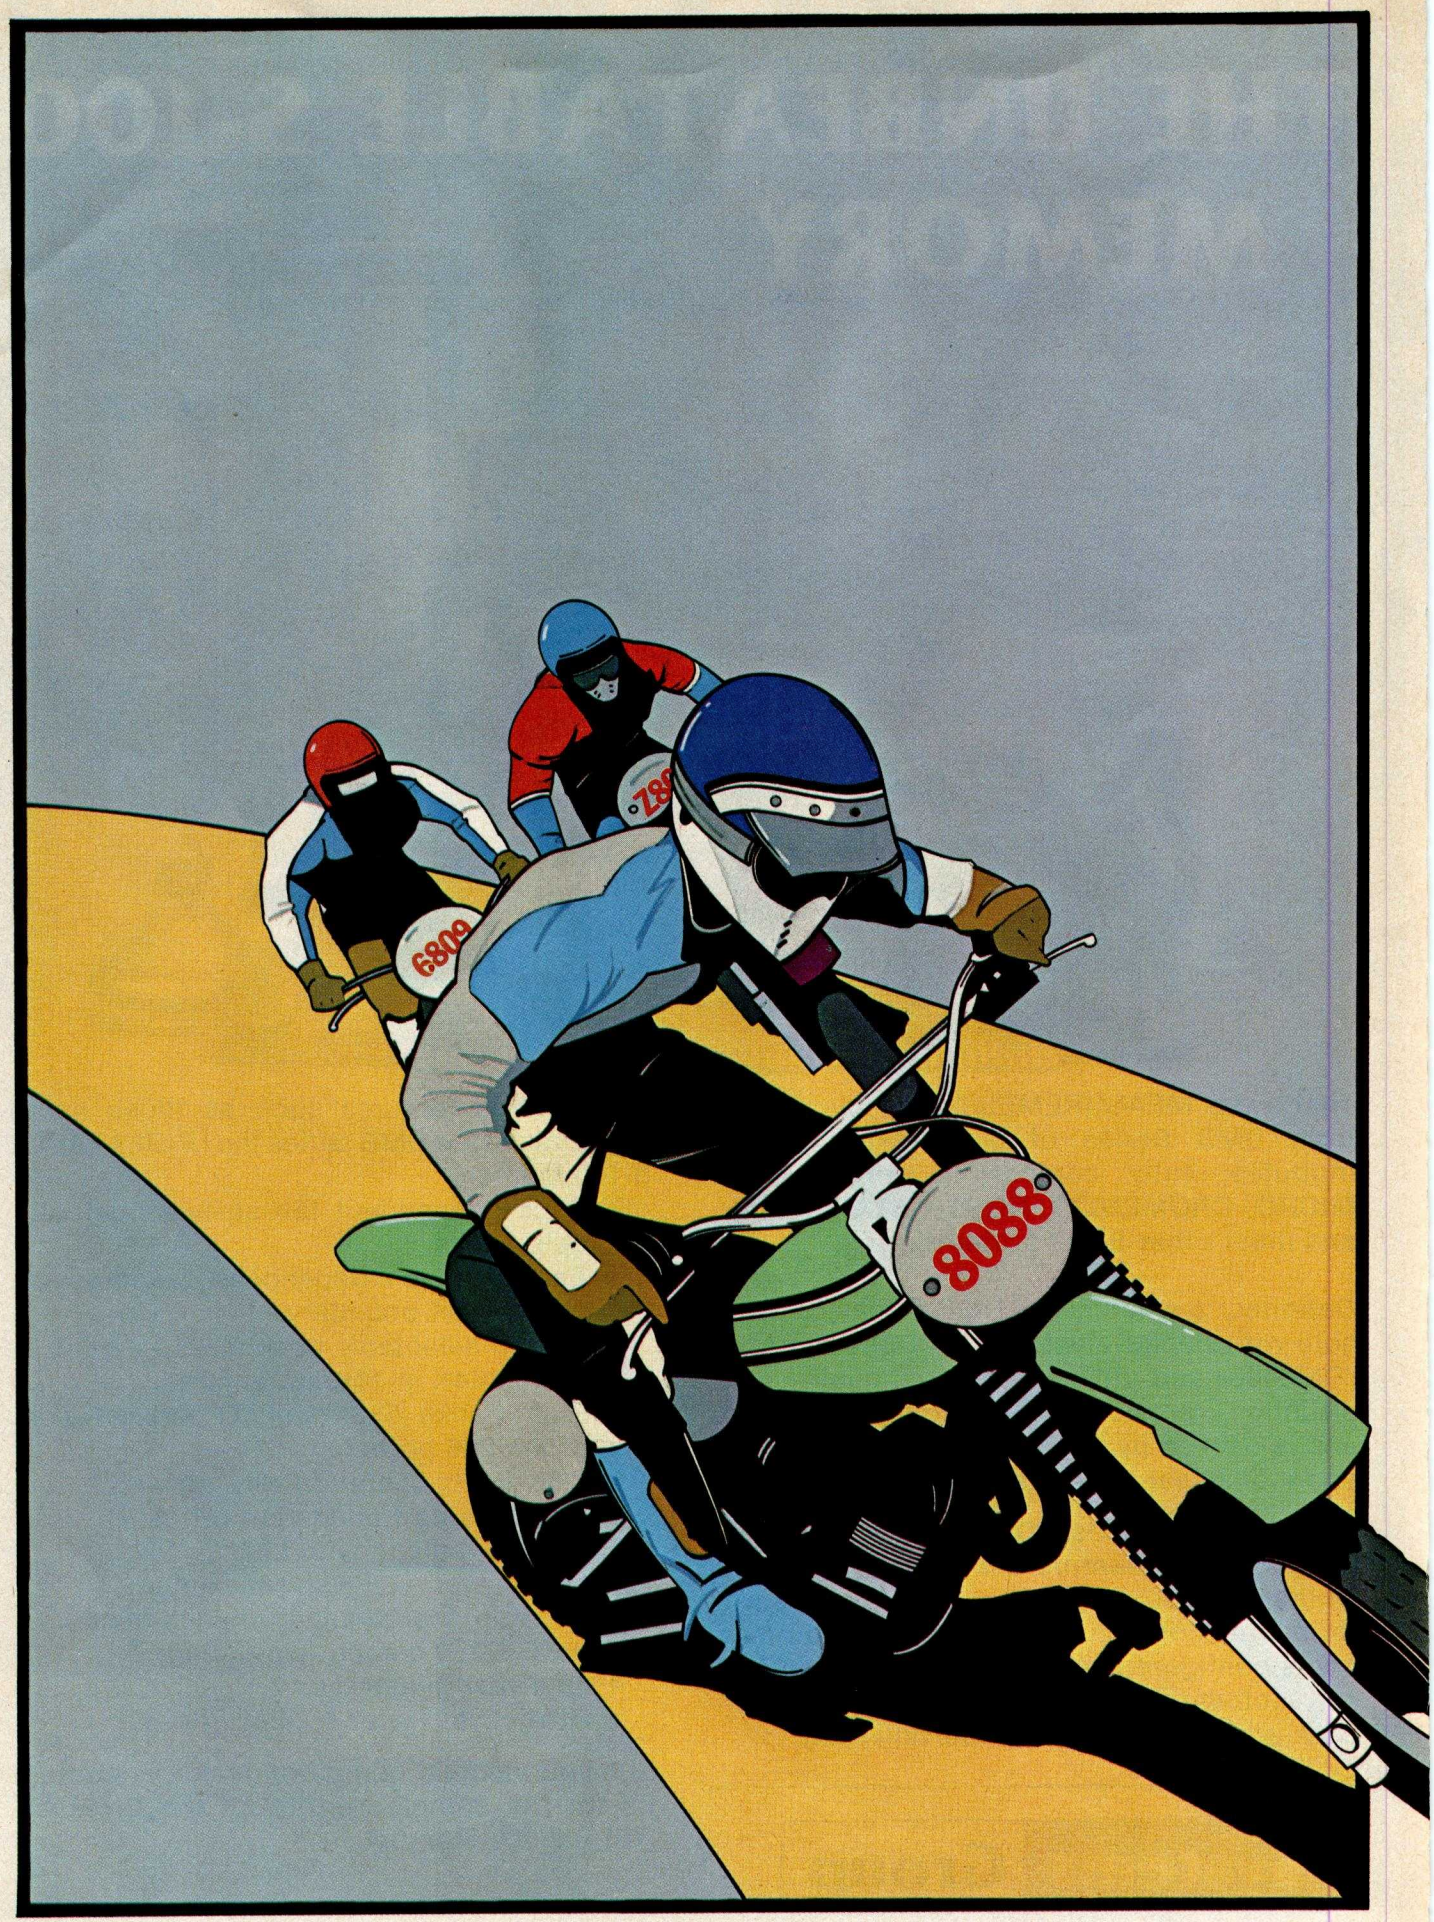
8088

8-Bit Champion

In price-performance, look to Intel's powerful iAPX 88 microprocessor to leave the pack behind. Both now and down the road.


In price-performance races, the iAPX 88 is the one to beat. It's two times faster than the Z-80A and the 6809. And recent benchmark tests show that the iAPX 88, with its 8088 CPU, consistently outperforms its closest competitors in memory efficiency, ease of programming and throughput—by as much as 4 to 1. This is especially important in high-performance tasks such as block moves, character searches, word shifts, and 16-bit multiplies. All critical for applications like word processing, terminal control, scientific instrumentation and industrial control.

And because it's the only 8-bit microprocessor that addresses up to 1 million bytes of memory, the 8088 can take on large programs. Without having to slow down due to overlays or memory bank switching, like other 8-bit processors.

Tough price competitor

In price competition with other 8-bit microprocessors, the iAPX 88 has become the front runner.


You save dramatically on memory chips, too. The iAPX 88 takes—on the average—30% less memory than competitors for the same programs. Then too, it allows you to use lower cost memory to get the same throughput as competitors. With a 5MHz 8088, you can use our 450ns memories and still outperform a 4MHz Z-80 requiring 250ns chips. Depending on the application, your cost savings here can be substantial.



8-Bit Microprocessor Price Trends

No contest now with new Intel software

To unleash the new power that the iAPX 88 puts in your hands, it takes more powerful software—the kind only Intel delivers today. Software that produces object code directly and gives you important extensions that allow you to fine-tune the software to your application.

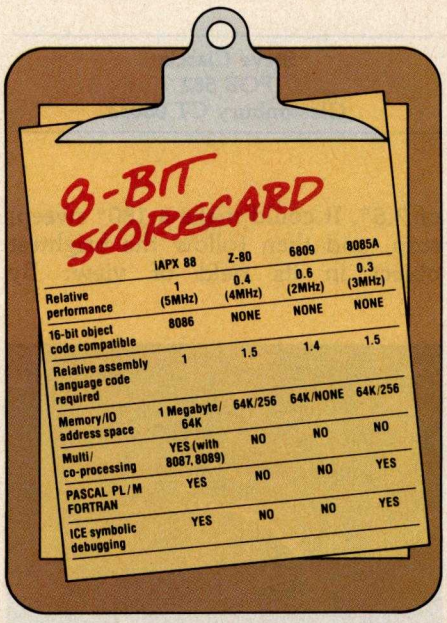

	iAPX 88	Z-80	6809	8085A
Relative performance	1 (5MHz)	0.4 (4MHz)	0.6 (2MHz)	0.3 (3MHz)
16-bit object code compatible	8086	NONE	NONE	NONE
Relative assembly language code required	1	1.5	1.4	1.5
Memory/IO address space	1 Megabyte/ 64K	64K/256	64K/NONE	64K/256
Multi/ co-processing	YES (with 8087, 8089)	NO	NO	NO
PASCAL PL/M FORTRAN	YES	NO	NO	YES
ICE symbolic debugging	YES	NO	NO	YES

Software such as PASCAL-88, the block-structured application language rapidly becoming the one most widely used. With our PASCAL-88, you can do direct port I/O and interrupt handling, as well as independent program module compilation. And produce code that runs faster than other, P-code interpreter versions.

Along with PASCAL-88, you get PL/M-88, our systems implementation language, our ANSI-compatible FORTRAN, and our ASM-88 macroassembler. So with more software capability than you've ever had before, now you can choose the right language tool for each application—whatever it calls for.

Get out in front with complete development support

All the development support tools you need are ready to go today from Intel. Start with the Intellec® Microcomputer Development System. Add to that our ICE-88™ in-circuit emulator. Together they give you CPU emulation in real time, plus features like symbolic debugging, diagnostic commands and program trace capability. With these tools you'll get your products to market faster than by any other route.

Looking down the road

Best of all, with the iAPX 88, your investment in today's solution is protected. Since the 8088 is 100% object-code compatible with the 16-bit 8086—plus its future generations, the iAPX 186 and iAPX 286—you have the industry's only guaranteed headstart on the path to the future. Regardless of which language you're writing in.

So if you want to outdistance the pack, choose the iAPX 88—available today from your local Intel distributor. To get your copy of benchmark results, contact your local Intel sales office or distributor. For more information write Intel Corporation, 3065 Bowers Avenue, Santa Clara, CA 95051. Or call (408) 987-8080.

intel® delivers solutions.

Europe: Intel International, Brussels, Belgium.
Japan: Intel Japan, Tokyo. United States and Canadian distributors: Alliance, Almac/Stroum, Arrow Electronics, Avnet Electronics, Component Specialties, Hamilton/Avnet, Hamilton/Electro Sales, Harvey, Industrial Components, Pioneer, L.A. Varah, Wyle Distribution Group, Zentronics.

Copyright © 1980 by Steven A Ciarcia. All rights reserved.

Home In on the Range!

An Ultrasonic Ranging System

Steve Ciarcia
POB 582
Glastonbury CT 06033

Each month I try to present a hardware project that is both interesting and relatively easy to build. Unfortunately, it's not as simple as picking a topic and quickly whipping up some circuit. More often than not, I have a number of potential topics and projects on the fire at the same time. Some are in limbo and just waiting for the right parts. Others are postponed when it turns out that the necessary hardware is something that could be better built by NASA (National Aeronautics and Space Administration) than by a computer hobbyist.

One topic that has always interested me is the concept of automatic ranging. I became involved with this idea when I wrote an article entitled "I've Got You In My Scanner," November 1978 BYTE, page 76. The original article was about an infrared sensor and parabolic reflector mounted to rotate on a stepper-motor shaft. With computer-controlled stepping, the result was something like the sweep of a radar antenna. The project was sensitive to infrared and visible light.

The scanner, parabolic-reflector, and stepper-motor combination could easily tell the direction of a light source to an angular resolution of 7.5°. It could make a 180° sweep, stop, and then follow the brightest object in its field of view. By recognizing the absence of known light sources (when the light path is blocked), it could even function as part of an intrusion alarm.

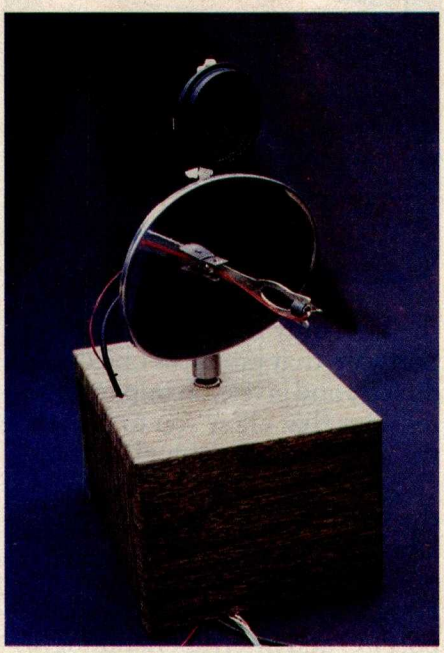


Photo 1: *A computer-controlled, stepper-motor-driven infrared and ultrasonic ranging scanner. An infrared-sensitive photo Darlington transistor (GE L14F2) is mounted at the focus of a parabolic reflector, which is attached to the shaft of a stepper motor; the ultrasonic transducer is mounted above it.*

The infrared sensor and drive mechanism were described in a previous Circuit Cellar article, "I've Got You in My Scanner! A Computer Controlled Stepper Motor Light Scanner."

However, even though it could "see," the infrared scanner could not tell how far an object was in front of it, or detect the presence of a nonluminous body crossing its path. What I really wanted was a device that could provide the computer with range as well as direction. That's when I started hanging around the camera shop.

Polaroid to the Rescue

The automatic focusing system on the Polaroid SX-70 Sonar OneStep Land camera intrigued me. I had considered tearing a camera apart just to use the ranging unit for my scanner, but sanity prevailed and I went back to designing my own circuit. Somewhere between thoughts of "Who'd really build this thing anyway?" and "I hope everyone can find all these components," I started seeing ads from Polaroid offering just what I wanted, without the camera.

The solution came in the form of an Ultrasonic Ranging System Designer's Kit sold by Polaroid for $125. The kit contains a technical manual, two instrument-grade electrostatic ultrasonic transducers, a modified SX-70 ultrasonic circuit board, an experimental demonstrator display board, and two Polapulse 6 V batteries. With this unit I was able to enhance my original infrared-scanner

Diagrams and schematics of the Ultrasonic Ranging System Designer's Kit were provided through the courtesy of Polaroid Corporation.

Circle 18 on inquiry card. →

Now! North Star Application Software!

North Star now offers application software for use on the HORIZON! Now you have one reliable source for both hardware and software needs! The first packages available are:

NorthWord—
NorthWord is a simple-to-operate word processing system designed for use with the popular North Star HORIZON. NorthWord enables you to increase office efficiency and cut document typing time and cost. NorthWord incorporates the most sought-after word processing features: easy editing, on-screen text formatting, simultaneous document printing, and much more. NorthWord can be integrated with other North Star software packages to produce customized letters, labels and reports quickly and efficiently.

MailManager—
MailManager enables you to compile and maintain complete organized mailing lists. Lists are easily accessible and can be compiled with a great deal of flexibility. Entries, corrections and deletions are easily made. The North Star MailManager can print your list on individual envelopes, on mailing labels, or in compact summary form.

InfoManager—
InfoManager is a powerful list-oriented, data management system. It will accept up to 50 categories of information for each record and has the ability to select and sort before printing. The North Star InfoManager has power and flexibility for many applications: product inquiry, inventory, customer/client records, calendar reminders, and as an easy way to fill in often-used forms.

GeneralLedger—
General Ledger and Financial Reporting, two programs in one, maintains general ledger accounts based on such input as checks, bank deposits and journal entries, and uses the information in the general ledger to produce customized financial statements and financial reports.

NorthWord is the central building block for all the North Star application software to follow. Packages now being tested include other accounting and professional application packages. For more information or a demonstration, contact your local North Star dealer.

NorthStar

North Star Computers, Inc.
1440 Fourth Street
Berkeley, CA 94710
(415) 527-6950
TWX/Telex 910-366-7001



design to include automatic range detection. The new scanner system incorporating the Polaroid unit is shown in photo 1. More on this later.

Polaroid Ultrasonic Ranging System

The Polaroid Ultrasonic Ranging System Designer's Kit costs $125 (This offer is good until December 31, 1980. Photo 2 shows the Designer's Kit as received.), and is available from:

Polaroid Corporation
Ultrasonic Ranging Marketing
Department 465 E
20 Ames St
Cambridge MA 02139
telephone (800) 225-1618



Photo 2: *Polaroid Ultrasonic Ranging System Designer's Kit, which includes ultrasonic sonar transducers, electronic circuitry, and a detailed specifications booklet.*

Two primary components compose the ranging unit. They are the electrostatic transducer (see photo 3) and the ultrasonic transceiver board (see photo 4). Together these components are capable of detecting the presence and distance of objects within a range of approximately 0.9 feet (0.3 meters) to 35 feet (10.6 meters) with a resolution of ± 1.2 inches (± 30 mm, or 0.29% of range).

In operation, a pulse is transmitted toward a target, and the resulting echo is detected. The elapsed time between initial transmission and echo detection can be used to find the distance by taking this round-trip time and multiplying it by the speed of sound. For a transmitted pulse to leave the transducer, strike a target 2 feet (0.61 meters) away, and return to the transducer, it requires 3.55 ms (1.78 ms per foot, or 5.84 ms per meter, during the round trip).

Essential to system operation is the transducer (shown disassembled in photo 5). It acts as a speaker in the transmit mode and as an electrostatic microphone in the receive mode. The transducer is 1.5 inches (38.1 mm) in diameter and consists of a 0.003 inch (0.07 mm)-thick gold-plated foil stretched over a concentrically



Photo 3: *Close-up view of the Polaroid Ultrasonic Transducer.*

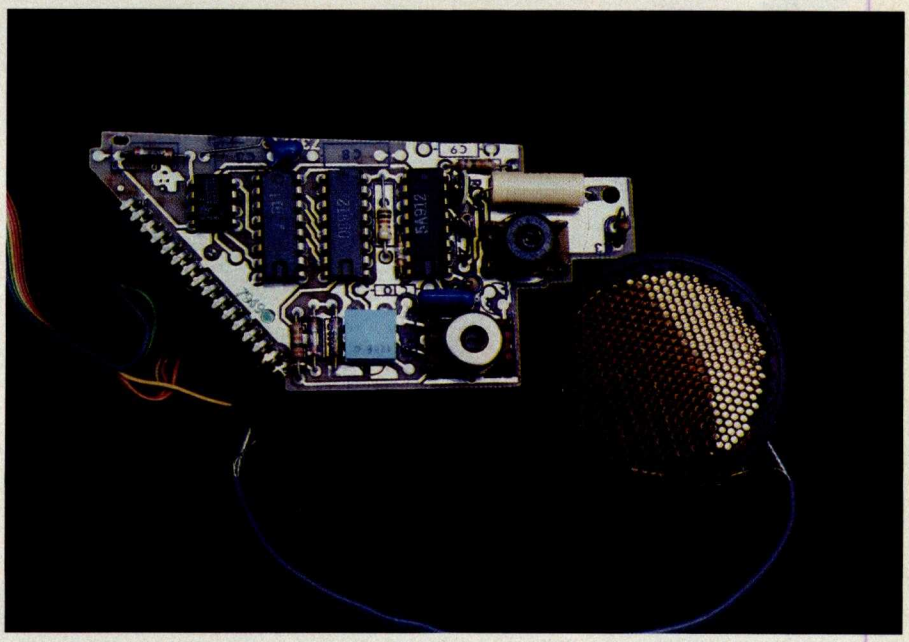


Photo 4: *Close-up of the ultrasonic circuit board, which contains custom analog and digital integrated circuits.*

Circle 19 on inquiry card. →

National Microsoftware Producers
ANNOUNCES
VTS/80™

Video Typing System for 8080, 8085 and Z80's

PROFESSIONAL QUALITY
WORD PROCESSING PACKAGE FOR
CP/M* COMPATIBLE MICROCOMPUTERS



SOFTWARE

- CP/M COMPATIBLE
- EASILY OPERATED BY OFFICE PERSONNEL
- CONTAINS ALL PROFESSIONAL WORD PROCESSING FEATURES
- PROMPTS ON SCREEN GUIDE USER THROUGH FUNCTIONS
- COMPARABLE TO DEC, NBI, QYX, WANG . . .

HARDWARE

- OPERATES ON 8080, 8085 AND Z80 MICRO-COMPUTERS WITH 48K MEMORY
- CHOICE OF 5" OR 8" FLOPPY DISKETTES
- REPLACEMENT KEYTOPS PROVIDED FOR MOST CRT's
- SUPPORTS SERIAL AND WORD QUALITY PRINTERS (DIABLO, NEC, QUME)

PACKAGE

- REPLACEMENT KEYTOPS COLOR CODED BY FUNCTION
- MANUAL WITH EXTENSIVE GRAPHICS DESIGNED FOR THE FIRST-TIME USER
- SELF STANDING MANUAL IN EASEL BINDER
- SPANISH, FRENCH, GERMAN, DUTCH VERSIONS AVAILABLE

SOLD THROUGH AUTHORIZED DEALERS AND DISTRIBUTORS ONLY

O.E.M. INQUIRY INVITED


SUGGESTED RETAIL PRICE $549.00

* CP/M is a registered trademark of Digital Research

NMP

NATIONAL MICROSOFTWARE PRODUCERS, INC.
3169 FILLMORE STREET
SAN FRANCISCO CA 94123 USA
415·346·7025 TELEX 171790

WORD PROCESSING SOFTWARE

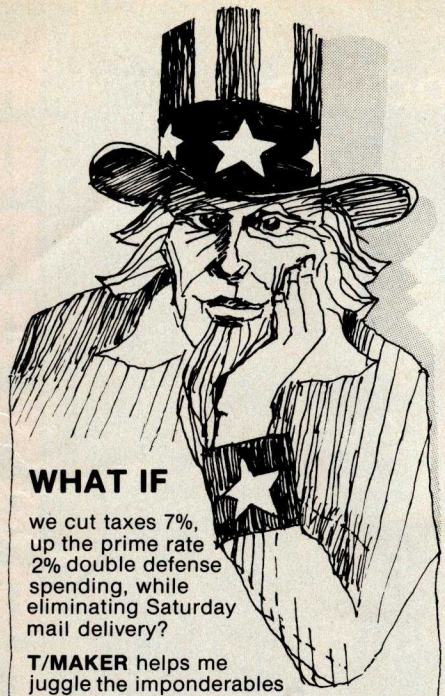

WHAT IF

we cut taxes 7%, up the prime rate 2% double defense spending, while eliminating Saturday mail delivery?

T/MAKER helps me juggle the imponderables fast and gives me a national overview on my CRT screen. (Yuk!)

T/MAKER can integrate numerical and text data, making analysis easy and then print out a document in hard copy for the clods on Capitol Hill.

T/MAKER is a wonderful tool for data analysis. It is easy to set up calculations for rows and columns of tabular data, automatically perform the computations, review the results and then modify some of the data to see the impact on the over all results. Several days of manual work can be accomplished in minutes.

T/MAKER is a full screen editor for word processing which handles text up to 255 characters wide. It includes features like text formatting and justification, text buffer for block moves and repeated inserts, global search and replace and commands for printing your letters, reports and documents.

T/MAKER can perform an unlimited number of analysis and reporting tasks which integrate numerical and text processing. For example:
• Financial Statements • Balance Sheets • Statistics • Growth & Projections • Profitability Reports • Revenues & Expenditures • Portfolio Analysis • Price Lists • Rate Structures • Inventory Valuation. . . . . and much, much more.

T/MAKER requires a 48K CP/M system, a total of 240K bytes of disk storage, CBASIC-2, and a CRT computer terminal with cursor addressing and clear screen.

T/MAKER system is $275.00 complete with documentation and quick-reference card.
Documentation alone is $25.00.

LIFEBOAT ASSOCIATES
1651 Third Ave. NY, NY 10028
(212) 860-0300
International Telex 220501



T/MAKER is a trademark of P. Roizen
CP/M is a trademark of Digital Research

grooved aluminum plate. When the metallic backplate is in proximity to the foil, it forms a capacitor. The foil is the moving element which converts electrical energy into sound and the returning echo into electrical energy.

The diameter of the transducer determines the directionality of the transducer. The acoustical signal-strength lobe pattern, or acceptance angle, during operation is shown in figure 1. The graph indicates that the transducer is fairly directional.

When the unit is activated, the transducer emits a sound pulse. The crystal-controlled electrical pulse

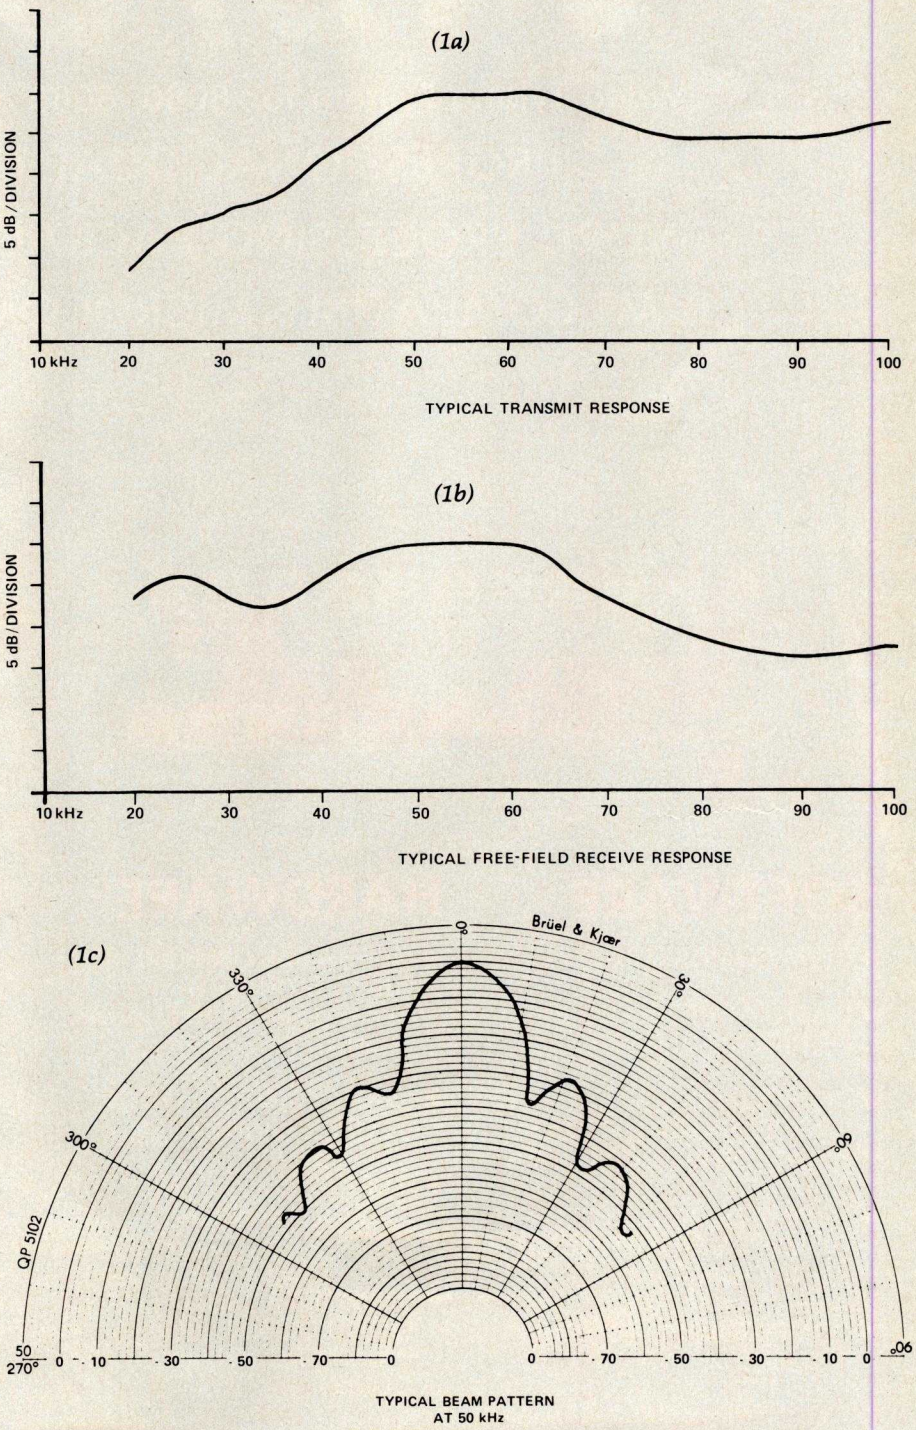


Figure 1: *Typical transmission frequency-response curve (1a), reception frequency-response curve (1b), and radial-beam pattern (1c) of the Polaroid ultrasonic transducer. The beam pattern was measured at 50 kHz, with dB values normalized to on-axis response.*

Circle 20 on inquiry card. →

Memory Expansion Module
for TRS-80*..



Three assembled and tested configurations are available:

Without RAM (**MT-32A** @ $119.50)
With 16K RAM (**MT-32B** @ $159.50)
With 32K RAM (**MT-32C** @ $199.50)

All you have to remember is to plug it in

Introducing the MT-32. Our new, brilliantly designed Printer/Memory expansion module for the TRS-80. This unit will add 16K or 32K of dynamic RAM to your basic 16K machine. The module also contains circuitry to drive Microtek's MT-80P dot matrix printer, or any other Centronics-compatible printer.

No hardware modification to your TRS-80 is required. Just plug into your bus connector and you are ready to go.

All Microtek products are covered by a one year warranty.


* TRS-80 is a Registered Trademark of Tandy Corp.

Available from Microtek or your nearest computer dealer.

MICROTEK inc.

9514 Chesapeake Drive
San Diego, CA 92123
Tel. (714) 278-0633
Outside Calif. call toll free: 800-854-1081
TWX 910-335-1269


MEMORY TRANSPLANT

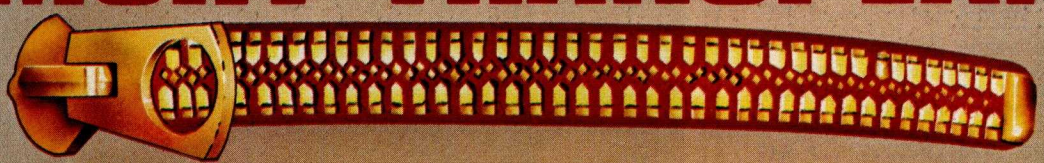



Circle 21 on inquiry card.

SPECIALS
==========



NORTH STAR HORIZON:

HRZ-2-32K-DD-ASM.....$2275
HRZ-2-32K-Q-ASM.....$2675
NORTHWORD DQ.....$ 295
MAIL MANAGER.....$ 235
INFO-MANAGER.....$ 365
GENERAL LEGER.....$ 775
ACC. REC. OR ACC. PAY..$ 445
WORD STAR.....$ 320


COMMODORE (PET):

2001 32K.....$1090
8032 (80 COLUMN SCREEN)$1599
2040 DUAL DRIVE.....$1090
8050 DUAL DRIVE (1MEG).$1499
2022 TRACTOR PRINTER...$ 749

APPLE II PLUS CALL FOR PRICE

ATARI 800.....$ 799

TI 99/4 CONSOLE&MONITOR..$ 1190



SPINWRITERS FROM NEC:

5510 RO OR 5530 RO $2490
5520 KSR SERIAL.....$2790

CENTRONICS:

730.....$ 659
737-1 (LETTER QUALITY) $ 849
(WE CARRY THEIR COMPLETE LINE)
PAPER TIGER 440G.....$ 990

BASE II 800MST.....$ 649

OTHER PRINTERS WE STOCK:
ANADEX,COMPRINT,EATON,EPSON,
TELETYPE,TI,ETC-CALL FOR PRICE

DISPLAY TERMINALS

HAZELTINE 1420.....$ 949
1500.....$ 999
(WE CARRY THEIR COMPLETE LINE)
INTERTUBE II.....$ 775

TELEVIDEO 914.....$ 850

MOST ITEMS IN STOCK.
PRICES SUBJECT TO CHANGE

MULTI-BUSINESS COMPUTER SYS.
28 MARLBOROUGH STREET
PORTLAND, CONN. 06480

(203)342-2747 TWX 710-428-6345
M-F 9-6 SAT.9:30-3:00

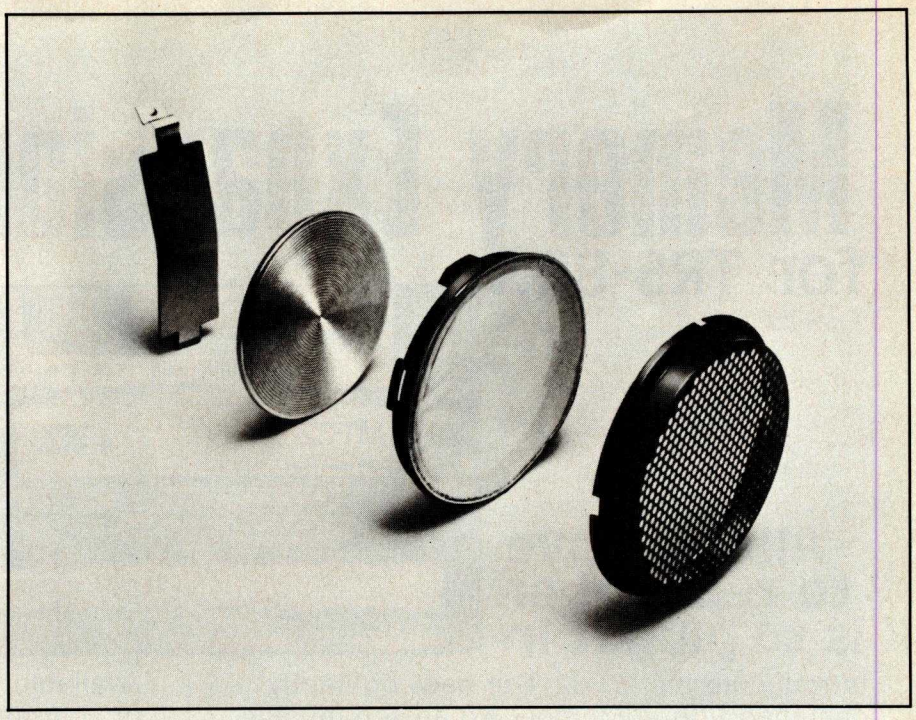


Photo 5: *Expanded view of the Polaroid ultrasonic sonar transducer. Behind a honeycomb grill, a 0.003-inch (0.07 mm)-thick gold-coated foil stretches over a concentrically grooved aluminum plate. The retainer at left holds the parts in place.*

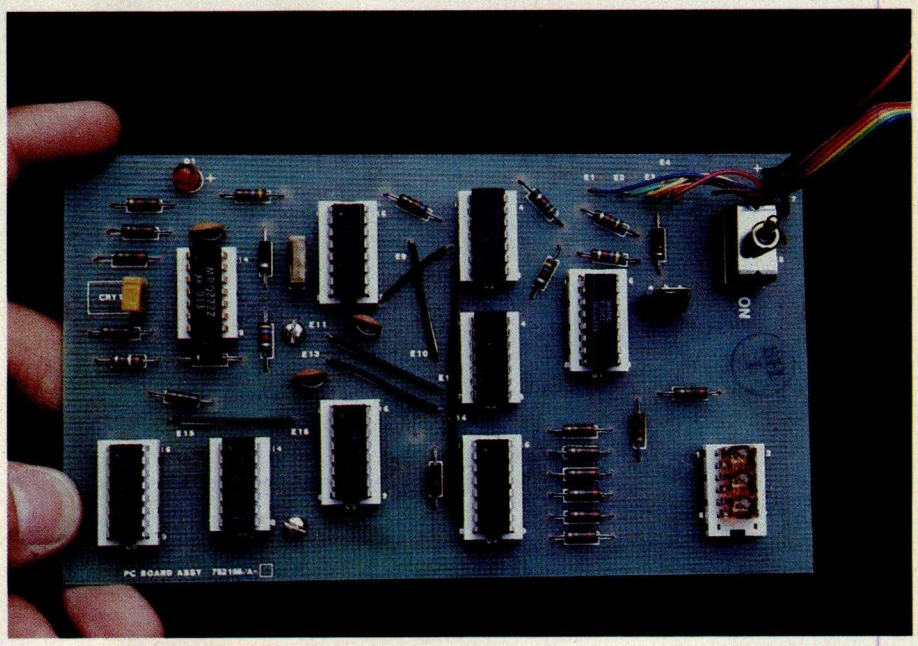


Photo 6: *The EDB, which contains the electronic circuitry shown in figure 4. The three-digit LED display is at the upper right.*


generated by the driver circuit is a 300 V high-frequency 1 ms "chirp" consisting of fifty-six pulses at four carefully chosen frequencies: eight cycles at 60 kHz, eight cycles at 57 kHz, sixteen cycles at 53 kHz, and twenty-four cycles at 50 kHz. This combination is used to overcome certain topographical characteristics of the area into which the signal is being transmitted, where a single frequency might be cancelled and no echo would be received.

Text continued on page 42

Circle 22 on inquiry card. →

PERMANENT RELIEF

Of today's and tomorrow's Word Processing problems

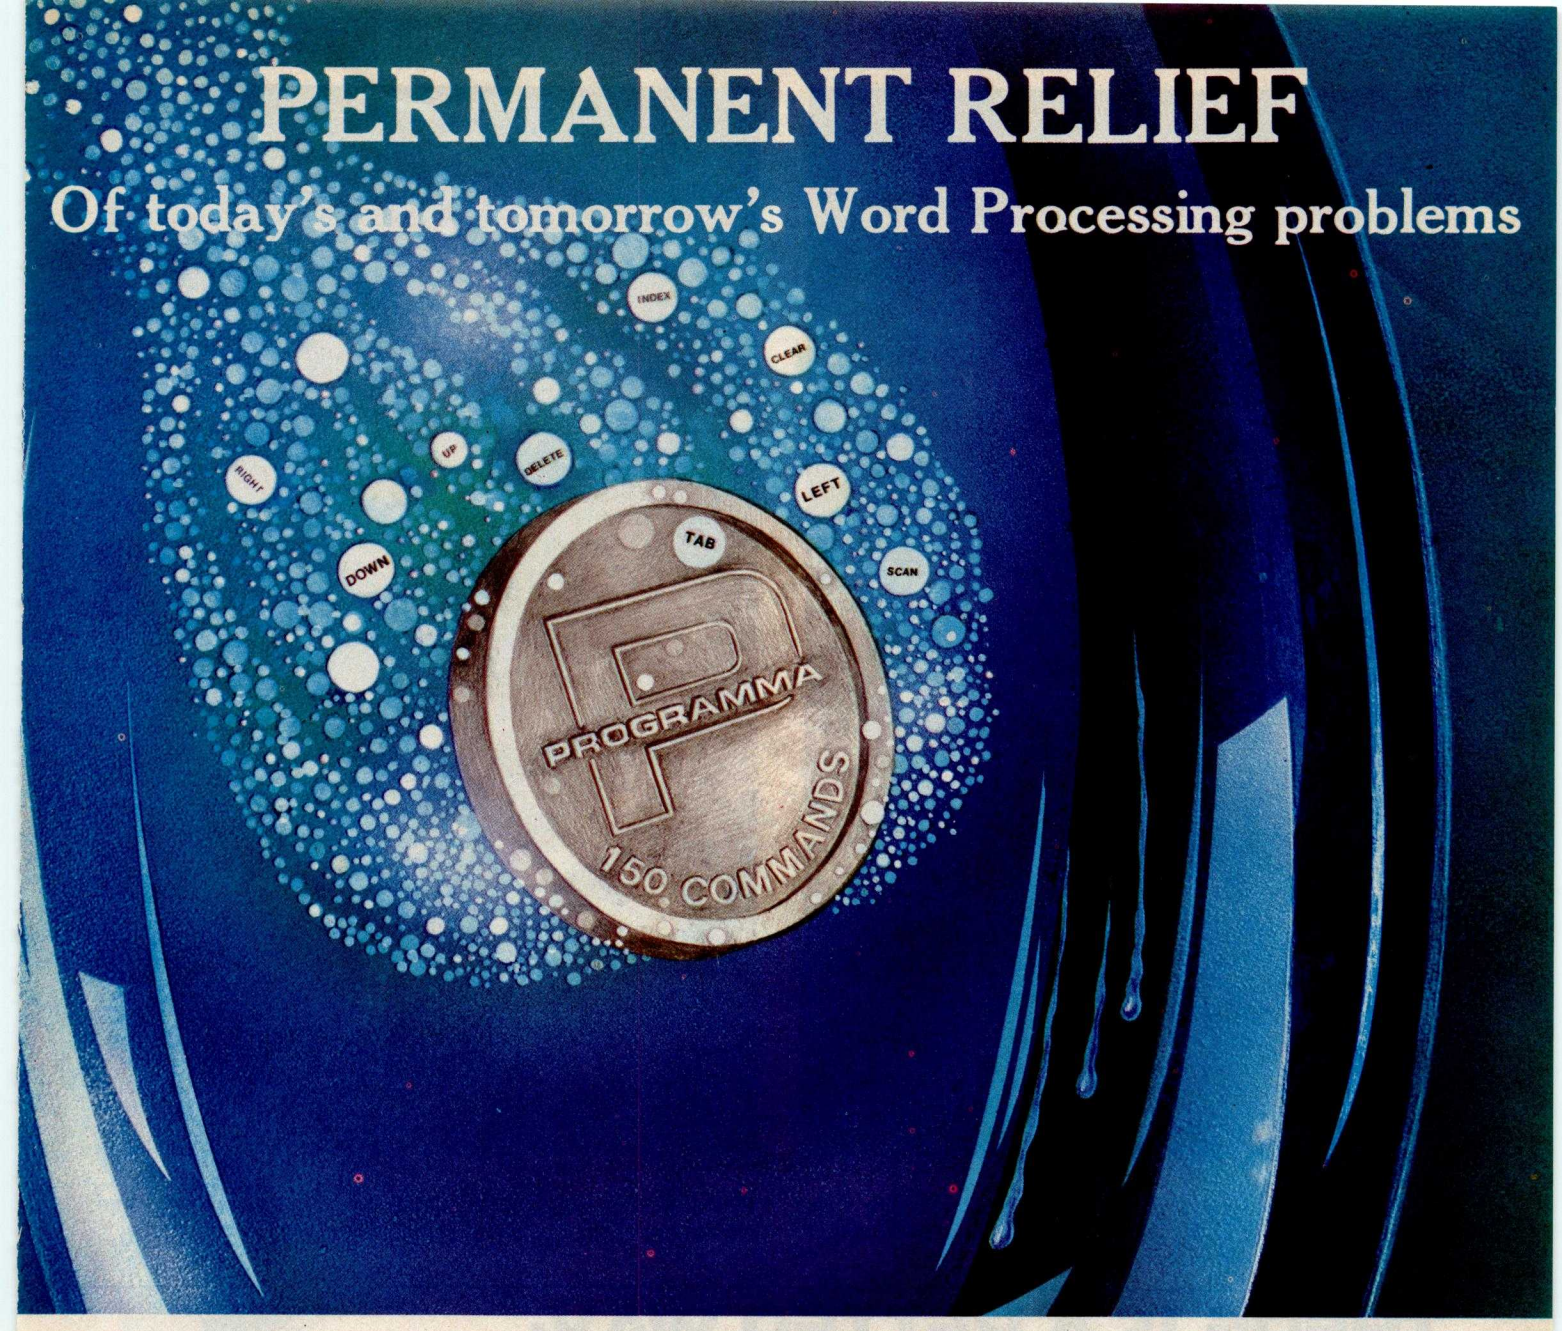

Apple PIE + Formatter

Apple PIE (Programma International Editor) and FORMAT (text formatter) offer full strength solutions to today's word processing problems. These versatile, powerful programs provide document preparation and word processing capabilities previously found only on much larger computer systems.


PIE is a general purpose, full screen editor that uses control keys and function buttons to provide a full range of editing capabilities such as search and replace, delete, copy, insert, move. Changes may be made directly anywhere on the screen and are shown as they are performed.

FORMAT uses simple instructions embedded in the input text to describe the desired appearance of the final document. It handles centering, underlining, indenting, page numbering, margins, headers, footers, even form letters, and includes a proofing capability.

These high-quality, cost-effective programs come with comprehensive documentation and run on a 32K Apple II. They are available through your local computer store or direct from Programma International, Inc. at the introductory price of $79.95*.

VIDEX VERSION T.M.
DOUBLE VISION T.M.
SUPR TERM VERSION T.M.
STANDARD VERSION

*December 1, $129.95.

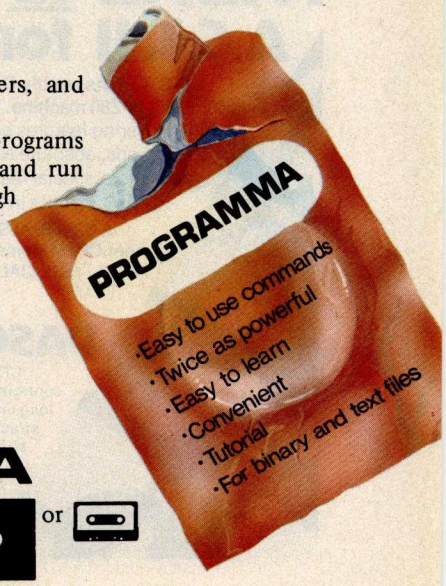

PROGRAMMA
3400 Wilshire Boulevard
Los Angeles, California 90010

Simple enough for the beginner. Versatile enough for the professional.

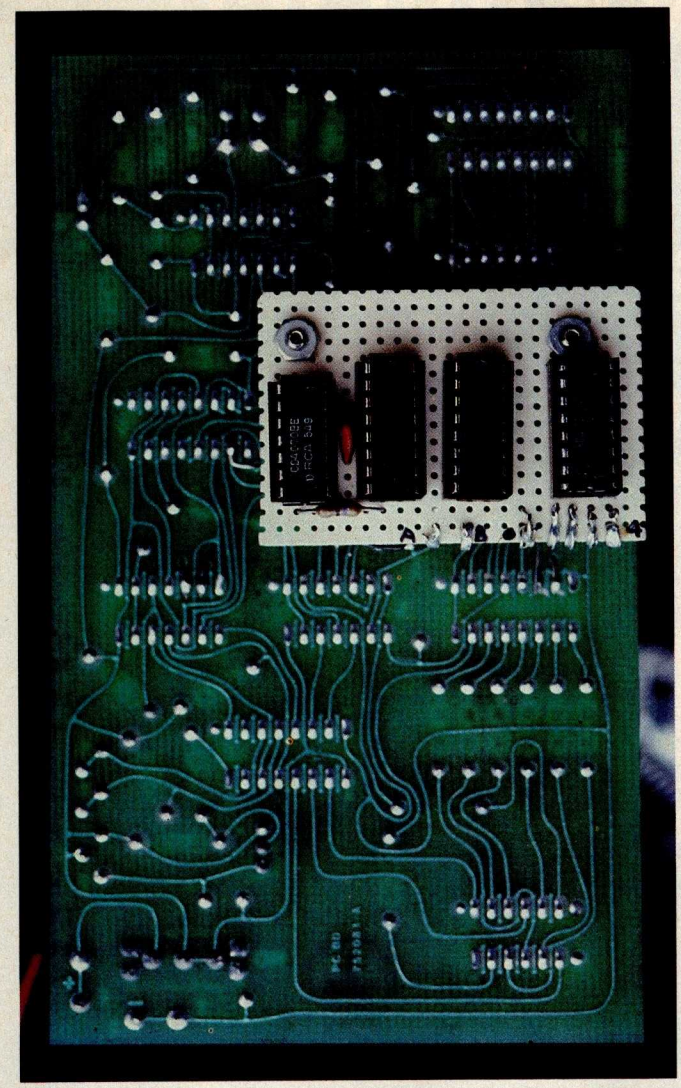


Photo 7: *The prototype of the interface circuit of figure 5 has been attached to the EDB. The interface allows a computer to read the three-digit distance value.*

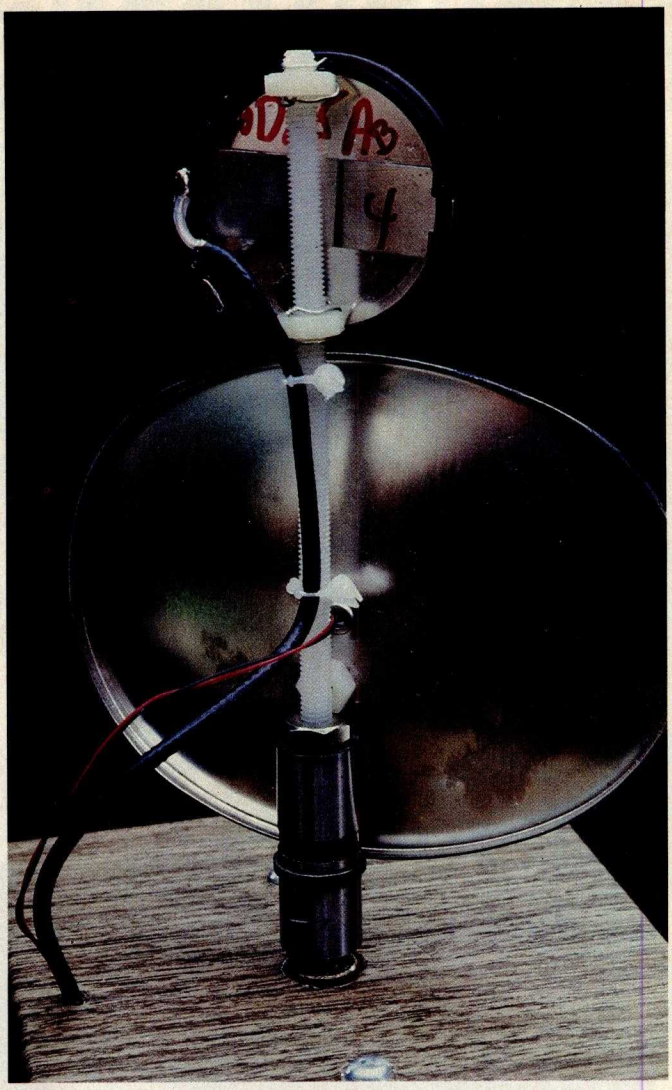


Photo 8: *Close-up of the back side of the reflector and transducer of the scanner, showing the mounting apparatus.*

THERE IS A BETTER WAY:
A.C.T. II for the 8086/8088...only $175.

A.C.T. II (Assembly Coded Translator) is a cross-assembler that lets you develop 8086/8088 code on any CP/M® based 8080, 8085, or Z80 machine. Compare with competing software: **A.C.T. II** supports more Intel mnemonics **and** costs less, while delivering features such as assembly speeds greater than 1000 lines/minute, macro support, a comprehensive set of pseudo-ops, absolute assemblies, system text file support, local proc definition, code file format (standard Intel hex), and many more special features.

A.C.T. II fits in 24K of RAM (including CP/M). Complete with manual (available separately for $20) and sample programs.

A.C.T. I IS ALSO AVAILABLE. Develop 6502, 6800, 8080, 8085, and Z80 code on any 8080, 8085, or Z80 machine running under CP/M. Same features as A.C.T. II; **$125** with manual (manual available separately for $15).

SPECIAL COMBINATION PRICE: For a limited time, **A.C.T. I** and **A.C.T. II** are available for **$225** including all manuals.

PASCAL at a Basic Price: $175 complete

CP/M compatible **PASCAL/M** includes features such as built-in error checking, console cursor controls, extensions chosen for campatibility with other popular PASCALs, complete random file and long integer (32 bit) support, full Wirth implementation, all I/O totally compatible with CP/M file structure, optional updating service, full access to CP/M data files written in other languages and stored under CP/M, and much more.

PASCAL/M fits in 56K of RAM (including CP/M) and includes a 90 page manual (available separately for $10). **You may never go back to BASIC again!**

How to order: All disks are shipped on single-sided, single-density, soft-sectored CP/M compatible media. PASCAL/M: Specify Z80,8080, or Z80+9511 math chip version (all are $175). We accept UPS COD, Mastercard® VISA®, personal checks(allow time to clear), and certified checks. Californians add sales tax. Add $10 outside USA.

order — call 408-248-5543

CP/M is a trademark of Digital Research
A.C.T. I and A.C.T. II are trademarks of Sorcim

SORCIM

P.O. BOX 32505
SAN JOSE, CALIFORNIA 95152

Circle 23 on inquiry card.

Circle 24 on inquiry card. →

NEW DISK SYSTEM POLISHES APPLE™



Micro-Sci's new disk drive family really makes your Apple shine.

Both the A-40 and A-70 offer extra performance plus the ability to read existing diskettes written on Apple Disk II systems.

And a jumper selectable boot prom for 13 and 16 sector interger Basic or 8 sector Pascal comes standard.

The Model A-40 actually costs a lot less than Apple Disk II drives. Yet it provides 40 tracks instead of 35, along with up to 20K increase in capacity. Maybe an extra 20K isn't anything to write home about, but the speed sure is—5 ms track to track vs. Apple's 15 ms.

The Model A-70, on the other hand, features twice the tracks and capacity of the Apple Disk II, but it costs only a few dollars more.

The secret of outstanding performance and reliability is a state-of-the-art design incorporating a band positioner, instead of a plastic cam, plus an improved media centering system.

SPECIAL DISCOUNT.

One A-40 plus controller is priced at only $495 and the second drive is just $395. You can save up to $200 per system over Apple II drive prices.

And you can save even more if you act now. Contact us today for a special $50 introductory discount on your Micro-Sci A-40 or A-70 system order.

μ-SCI

MICRO-SCI

1405 E. CHAPMAN AVENUE · SUITE E · ORANGE, CALIFORNIA 92666 · 714/997-9260

MICRO-SCI IS A DIVISION OF STANDUN CONTROLS, INC.

Apple and Apple II are registered trademarks of APPLE COMPUTERS INC., SAN JOSE, CALIFORNIA

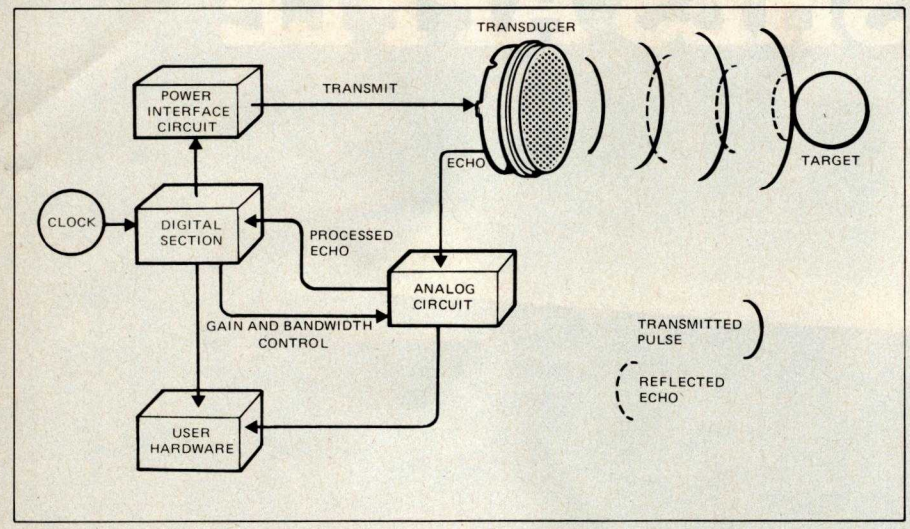


Figure 2: *Block diagram of the ultrasonic circuit. The circuit board contains a variety of custom components and is slightly modified from the unit used in SX-70 Land cameras. This circuit, as well as the EDB, is powered by a 6 V Polapulse battery. It seemed to work acceptably with a 5 VDC power supply.*

The block labelled "User Hardware" can be the EDB or any interface that can convert the ultrasonic circuit board's time-gated output into useful form.

Text continued from page 38:

The ultrasonic circuit board controls both the transmit and receive operating modes. It contains both digital and analog circuitry. In addition to transmitting the chirp and processing the echo, this circuit also tailors the amplifier sensitivity depending upon the object distance. Lower amplification is needed for close echoes, while higher amplification is needed for distant echoes. This is accomplished by increasing the amplifier gain and Q (ratio of reactance to resistance) in steps. Figure 2 is a block diagram of the ultrasonic circuit board.

Experimental Demonstration Board

The ultrasonic circuit board previously described is a modified camera assembly. The EDB (Experimental Demonstration Board, shown in photo 6) is not a camera component; it was designed specifically as a user interface to the ultrasonic board.

Text continued on page 48

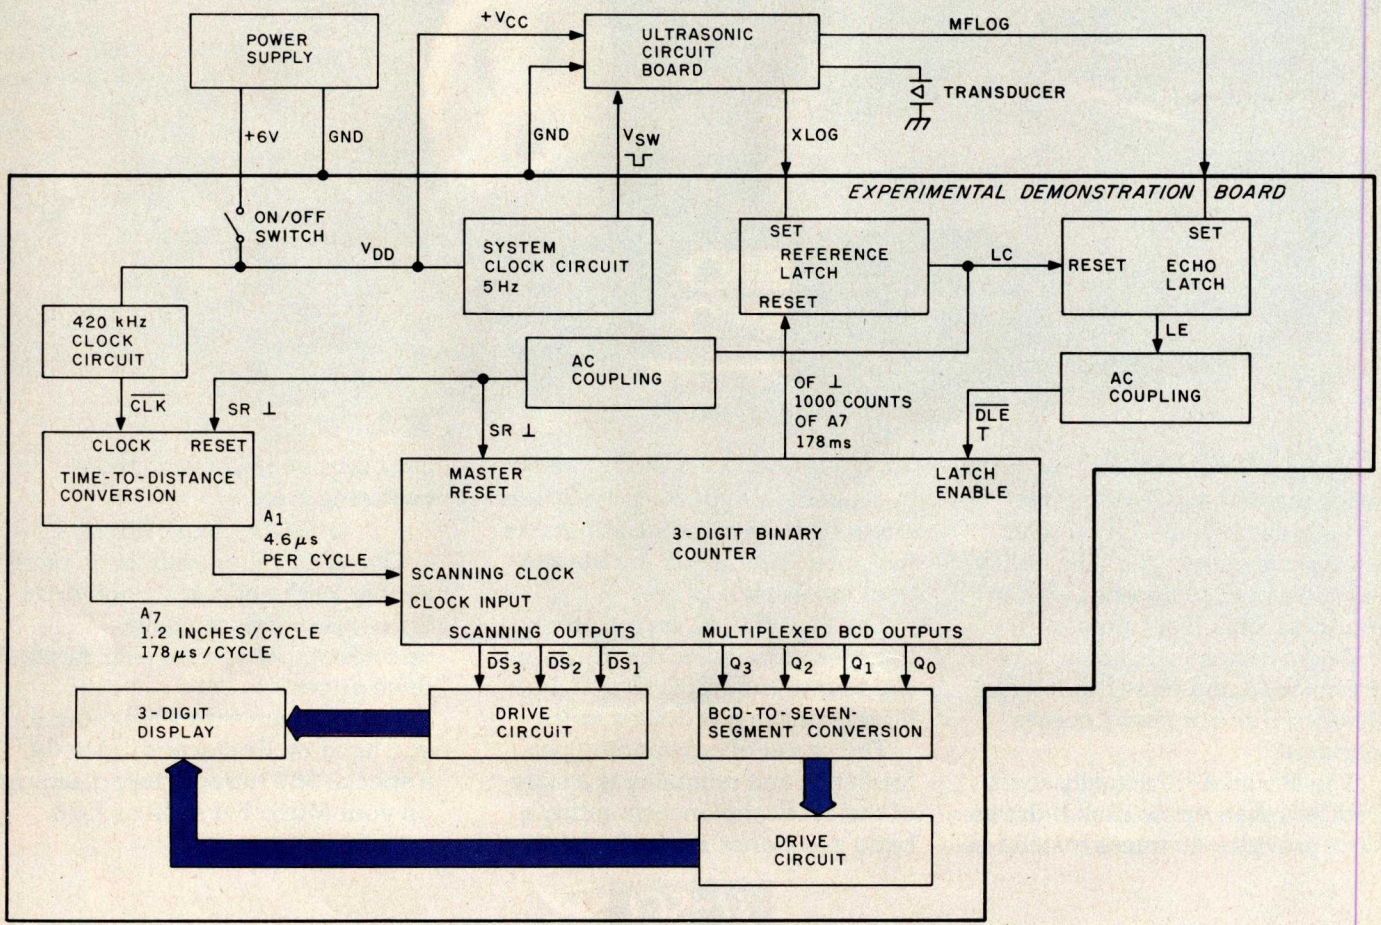


Figure 3: *Block diagram of the Polaroid Experimental Demonstration Board.*


Circle 25 on inquiry card.



Even at 5:12 a.m., it's hard to quit playing Personal Software™ strategy games.

A quick game before turning in can become an all-night session when you load any of the Personal Software™ strategy games into your Apple,* PET* or TRS-80.* They'll challenge, teach and entertain you. And now there are two new games—Gammon Gambler™ and Checker King™—joining Bridge Partner,™ Time Trek™ and the best-selling Microchess.™


Gammon Gambler is a sure bet. With ten levels of skill, you can begin a novice and become an expert. Whichever level you play, the computer moves so quickly you don't have to wait. The program follows U.S. tournament rules, and includes the doubling cube to spice up the game. Written for the Apple and PET by Willy Chaplin.



Gammon Gambler


Checker King—you probably forgot how much fun it is! If you move and change your mind, take it back and move again—without a peep from the computer. Play eight skill levels. Add and remove pieces. Save three board positions for later play. And solve three challenging checker puzzles. Written by Michael Marks for the Apple, PET and TRS-80.

Microchess, the most widely used personal computer chess program, is a nearly perfect chess opponent for the total novice or the advanced enthusiast. Written by Peter Jennings for the Apple, PET and TRS-80.

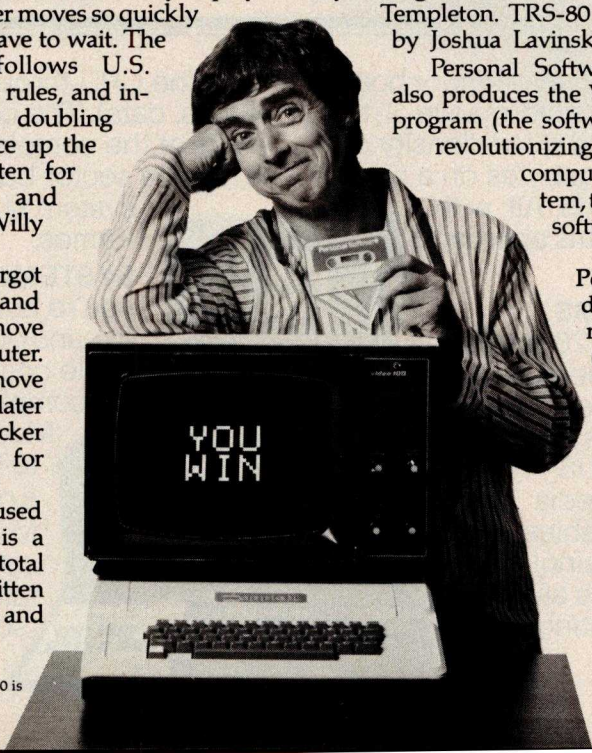

Bridge Partner. You against the computer in over 10 million different hands of contract bridge. You can even specify the hands' high card points. Written by George Duisman for the Apple, PET and Level II TRS-80.

Time Trek is easy to learn, difficult to master and impossible to forget. Take command of a starship in real-time action to make the galaxy safe again. PET version by Brad Templeton. TRS-80 program by Joshua Lavinsky.



Checker King

Personal Software, Inc., also produces the VisiCalc™ program (the software that's revolutionizing personal computing), CCA Data Management System, the Vitafacts series and other exciting software for the Apple, PET and TRS-80.

Now that you've read about the Personal Software programs, go see a demonstration. For the name of your nearest Personal Software dealer, call (408) 745-7841 or write to Personal Software Inc., 1330 Bordeaux Dr., Sunnyvale, CA 94086.

PERSONAL SOFTWARE

STRATEGY GAMES SERIES

*Apple is a trademark of Apple Computer, Inc.; PET is a trademark of Commodore Business Machines, Inc.; TRS-80 is a trademark of the Radio Shack Division of Tandy Corp.

While they were thinking hardware and software, we were thinking



S-100 SYSTEMS. From add-in memory boards to add-on hard disk. High performance S-100 busboards. Single, dual and quad-density disk systems with up to 1.2 megabytes on a single floppy disk drive. I/O boards. All, with the Morrow Designs systems approach to hardware and software.


COST EFFECTIVE SYSTEMS. Morrow Designs Discus M26 offers 26 usable megabytes of memory for just $4,995. About $192 per megabyte. And, it's a complete system, including a Shugart SA4008 Winchester-type sealed-media hard disk, power supply, cables, and cabinet with fan. The single board controller supervises all data transfers, communicating with the CPU through 3 I/O ports (command, status, data). The controller can generate interrupts at the completion of each command. A 512-byte sector buffer is on-board. And the system is available for S-100 mainframes.



SYSTEMS FOR SYSTEMS. Whether you're building systems or trying to expand your present system at reasonable costs, Morrow Designs offers complete, cost-effective subsystems. Modular systems that allow you to build your system your way.

SOFTWARE FOR SYSTEMS. Morrow Designs backs each subsystem with high-quality, fully-tested software. INSTALL software allows you to attach


systems.

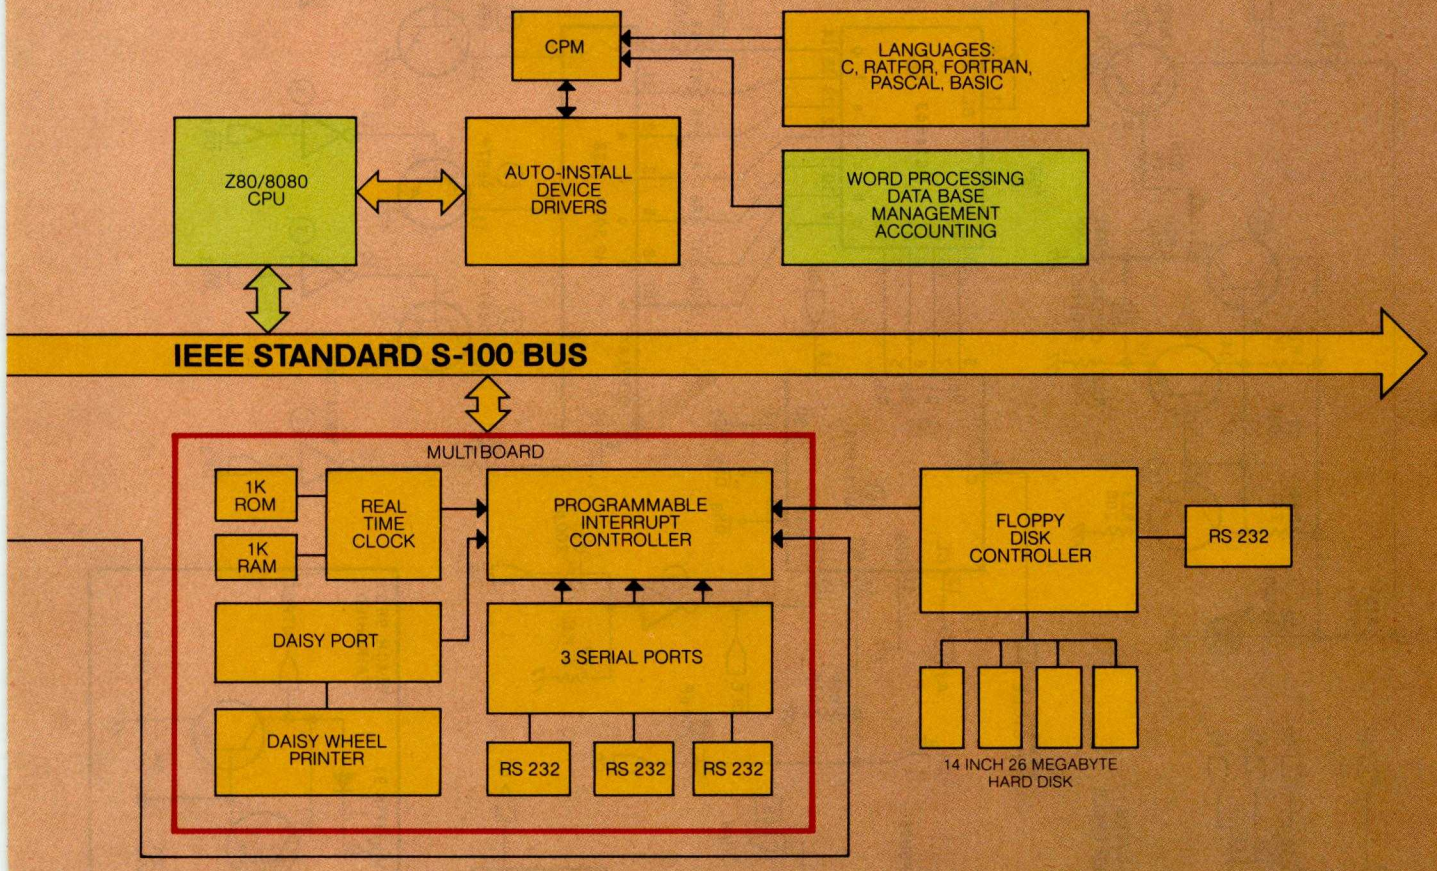

any Morrow disk system to any CP/M system operating under CP/M. Morrow CPM/CDOS software allows you to attach any Morrow disk drive to Cromemco Systems. In fact, if software runs under CP/M, it will run on any Morrow Designs hardware.

COMPARE PERFORMANCE. Hardware performance. Software performance. System performance. Any Morrow Designs disk drive, hard or floppy, can be mixed and matched through Morrow Designs standard software. And all necessary hardware, software and firmware is included with each system.

NOW, COMPARE PRICE. Morrow Designs products offer maximum efficiency at minimum cost. But we don't cut corners. What that means



to you is reliable system efficiency at cost effective prices.

Better systems for less. See Morrow Designs full line of memory and I/O, plus floppy disk/and the M26 hard disk system at your computer supplier. Or, send in the coupon for our full line catalog. Can't wait: Call us at (415) 524-2101.

MORROW DESIGNS

5221 Central Ave. Richmond, CA 94804

Gentlemen, Please send me your complete OEM hardware and software specifications. Plus the name of my nearest distributor.

Name_____

Company_____

Address_____

City_____ State_____ Zip_____

Circle 26 on inquiry card.


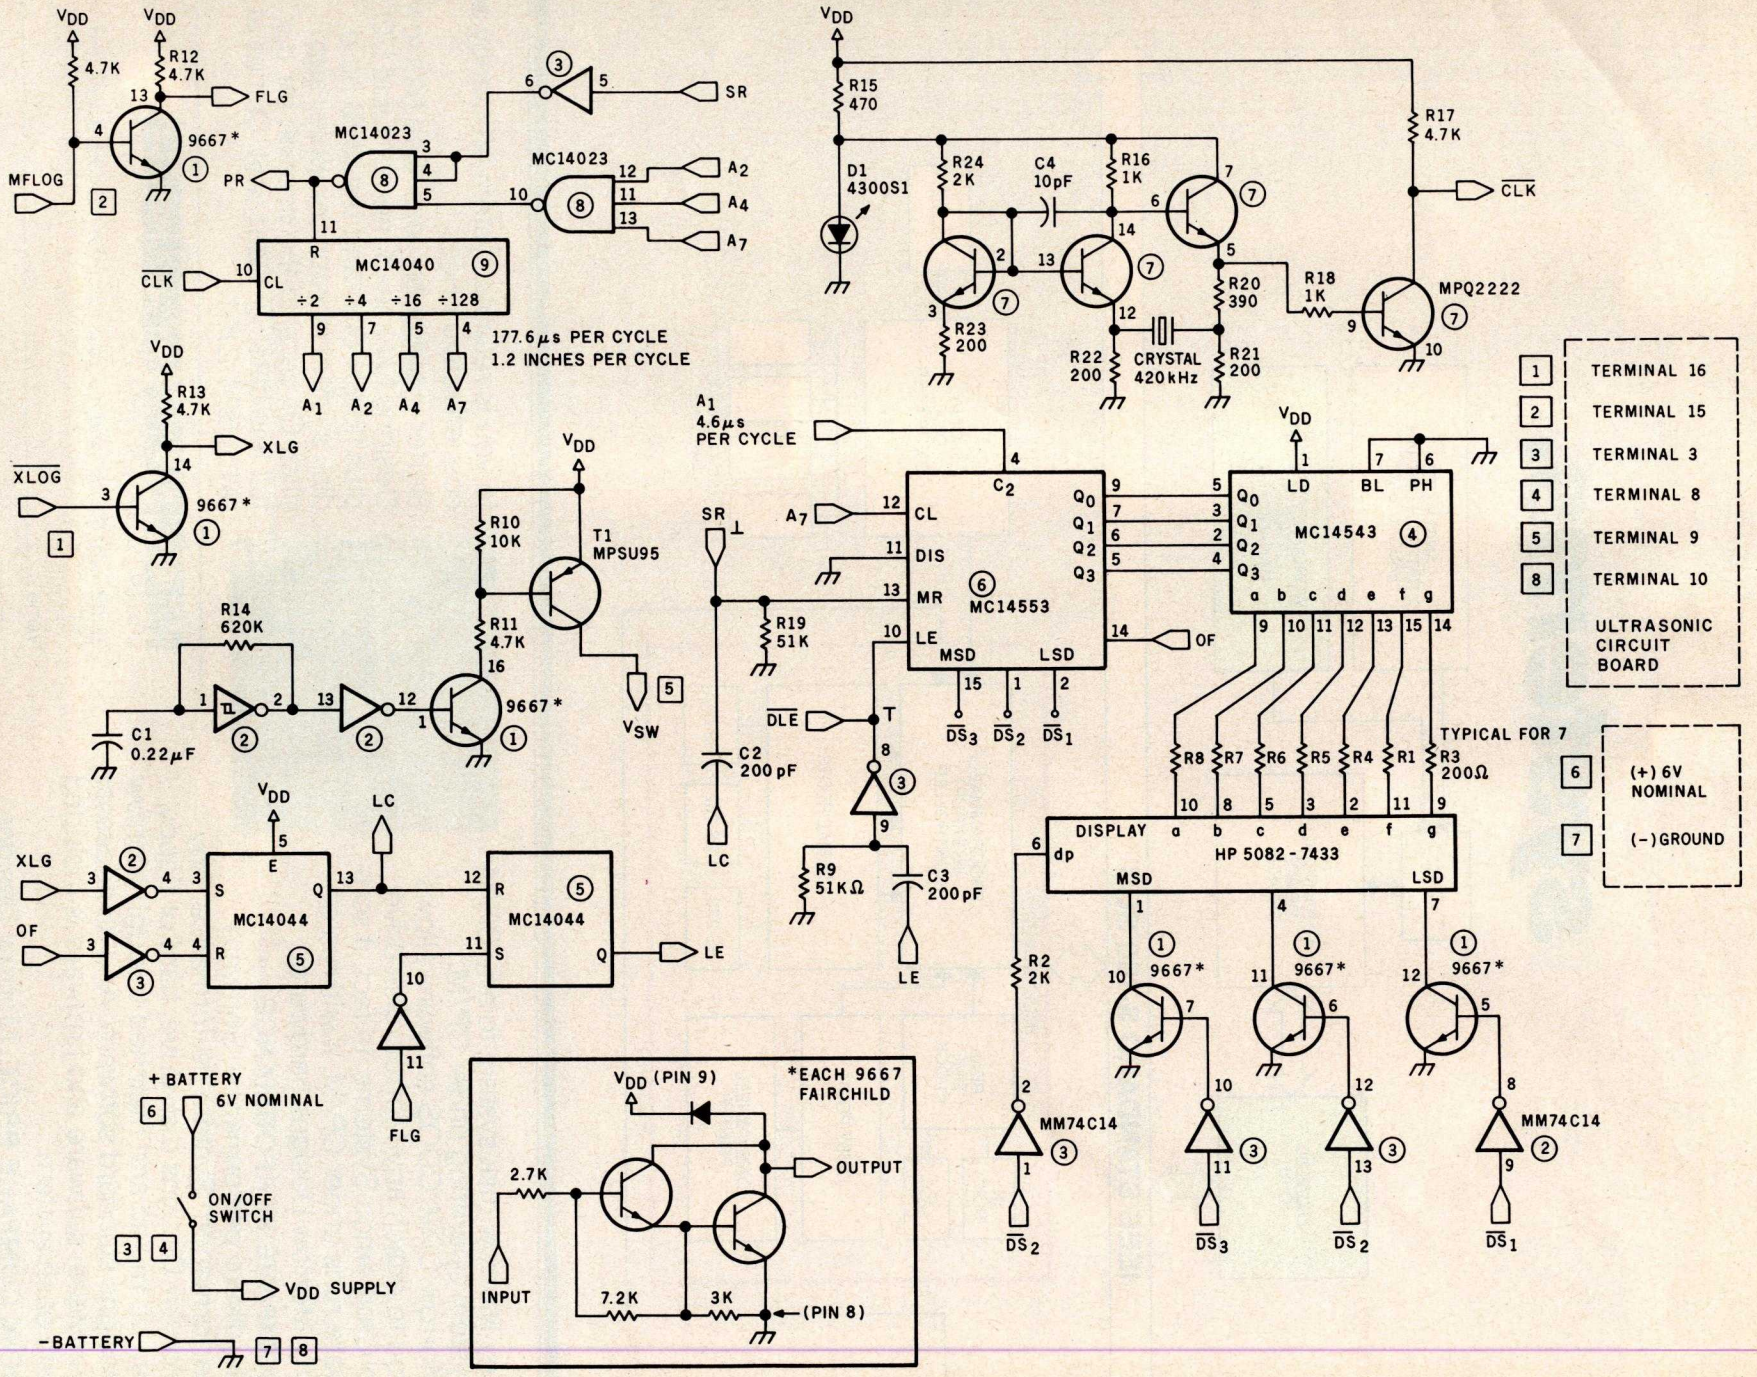


Figure 4: *Schematic diagram of the EDB. This board contains all the necessary circuitry to convert the raw data of the sonar transmit/receive time interval into a numeric distance value and display it on a three-digit LED display.*

Circle 27 on inquiry card.

The TRS-80™ Model III. A New Standard in Personal Computers!

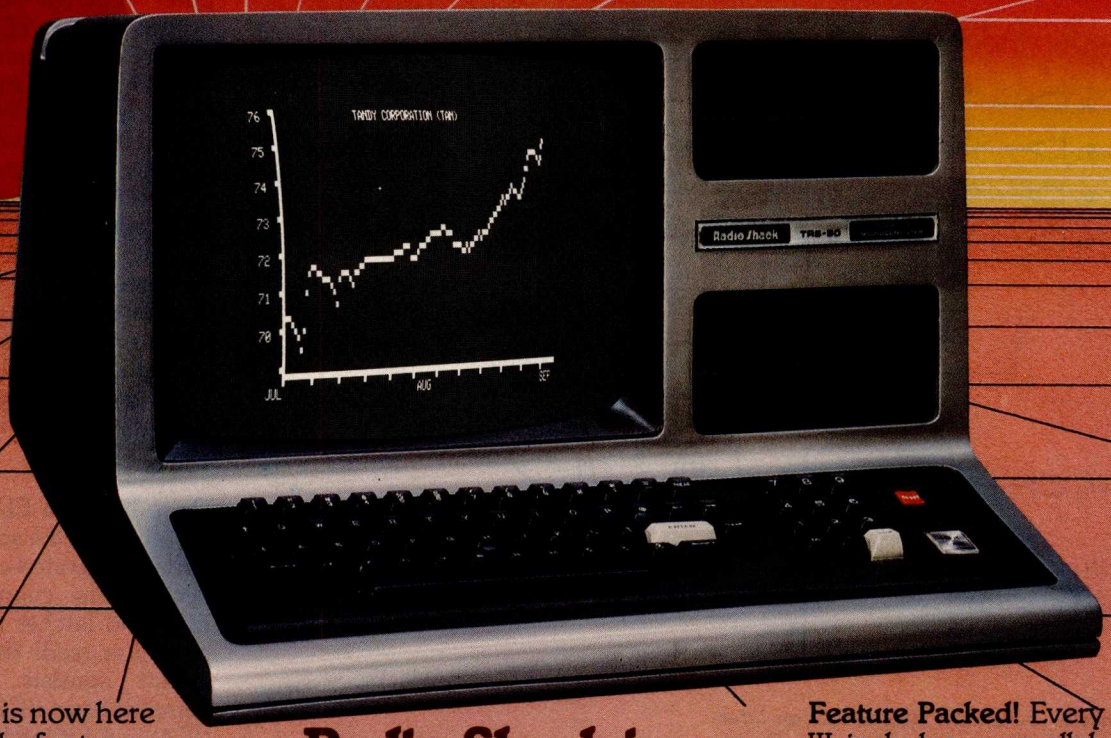

The new standard is now here — this beautiful, feature-packed, one-piece desktop computer system at a very, very affordable price. Continuing the TRS-80 tradition begun with our famous Model I, the amazing Model III gives you everything you've always wanted in a personal computer—including easy expandability.

It Talks Your Language! Model III is available with either Level I or powerful new Model III BASIC. Best news of all is that nearly all Model I software is compatible with Model III, so you already have a huge library of applications to choose from. Radio Shack already offers over 80 quality packages — from games to sophisticated business programs to word processing.

Big Storage Capacity! Model III BASIC features dual-speed cassette loading (1500 and 500 baud). You can expand your Model III to support up to four (two integral) double-density disks at 175K each for a total system capacity of up to 670K bytes.

Powerful Memory! Up to 48K of internal memory is easily added, since no expansion interface is required. Model III is completely self-contained. Start with a 4K Level I system or move up to our 16K Model III BASIC right away for the applications you need.

High-Resolution Display! Every Model III has a sharp display of 16 lines of 64 characters. Model III BASIC adds lower case plus graphics and special characters.

Radio Shack is Lowering the Cost of High Technology!

As Low As $699*

Feature Packed! Every Model III includes a parallel printer interface and 65-key keyboard. Model III BASIC adds "extras" like a real time clock, scroll protect, keyboard controlled screen print, and RS-232 firmware.

And It's Very Affordable! The 4K Level I system is only $699.* The 16K version with powerful Model III BASIC is just $999.* So why wait, step up to the new standard now. Available at Radio Shack stores, dealers and Computer Centers everywhere.

Radio Shack®
The biggest name in little computers™

Send me your TRS-80 Catalog!

Radio Shack, Dept. 81-A-40
1300 One Tandy Center
Fort Worth, Texas 76102

Name
Street
City State
Zip Phone

*Retail prices may vary at individual stores and dealers. Special order may be required initially.

Bit 1	Bit 0	Output Digit to Computer
0	0	$\overline{DS_1}$ (LSD)
0	1	$\overline{DS_2}$
1	0	$\overline{DS_3}$ (MSD)
1	1	n/a

Table 1: *Correspondence of the 2-bit digit-select codes with the EDB output data sent to the computer.*

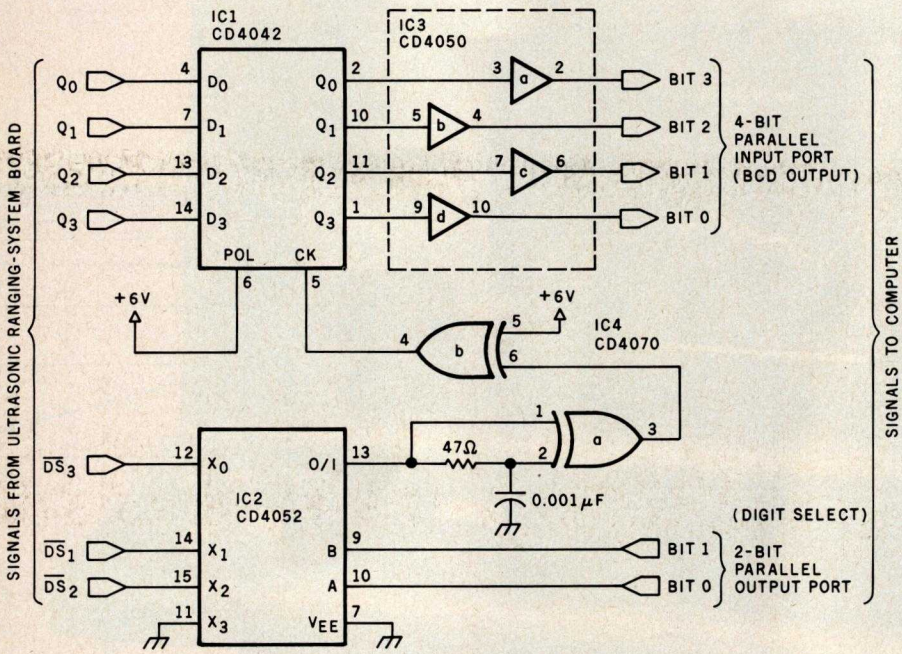


Figure 5: *Schematic diagram of an interface that allows a computer to directly read the three-digit LED display of the EDB, using four integrated circuits. Through 2 bits of a parallel output port, the computer sends a digit-select code and then reads the corresponding BCD value of the selected digit through 4 bits of a parallel input port.*

Number	Type	+6 V	GND
IC1	CD4042	16	8
IC2	CD4052	16	8
IC3	CD4050	1	8
IC4	CD4070	14	7

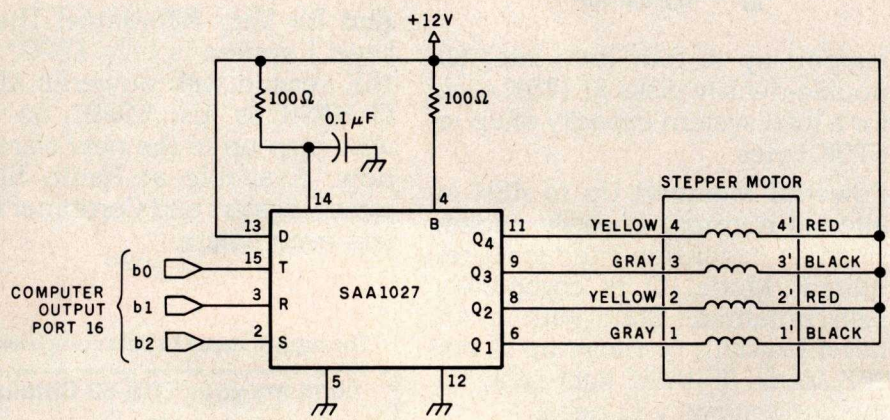


Figure 6: *Stepper motor and controller used in the infrared and ultrasonic scanner. The motor is a North American Philips K82701-P2 type, which turns 7.5° per step. It operates on 12 VDC.*

The SAA1027 integrated circuit is available from Signetics or from North American Philips, Cheshire, Connecticut, (203) 272-0301.

Text continued from page 42:

The EDB contains all the necessary electronic circuitry to convert the transmit/receive time interval into a figure indicating distance (in feet) and present it on a three-digit LED (light-emitting diode) display. Figure 3 is a block diagram of the EDB, while figure 4 shows the schematic diagram.

Connecting the EDB to the computer requires some thought. The output of the EDB is a three-digit display with a numeric output range of 00.9 to 35.0 in increments of 0.1 feet. The multiplexed display is controlled by a three-digit binary counter with strobed digit-select lines. It uses a single BCD (binary-coded decimal)-to-7-segment decoder/driver. At any instant, only one digit is energized, but because of the persistence of human vision, they all appear to be illuminated. Unfortunately, this multiplexed display output is not very computer-compatible and requires additional interface circuitry.

Decoding the EDB Output

Figure 5 is the schematic diagram of a four-integrated-circuit interface that decodes the counter output on the EDB and latches the digits while the computer reads them. Essentially the circuit consists of a three-input demultiplexer (IC2), an edge detector (IC4), a 4-bit latch (IC1), and an output buffer (IC3). The four-chip circuit is conveniently mounted on a piece of perforated circuit board and attached to the rear of the EDB, as illustrated in photo 7.

When the MSD (most-significant digit) of the LED display is energized, the $\overline{DS_3}$ line is low. The data on Q_0 thru Q_3 at this time form the BCD value of that number. Similarly, when $\overline{DS_2}$ goes low, the data lines will hold the second digit value. IC2 is a 4-to-1-line demultiplexer with the three digit strobes as inputs. A 2-bit TTL (transistor-transistor logic)-compatible parallel output from the computer determines which of these channels is routed through the multiplexer. To get $\overline{DS_1}$, the LSD (least-significant digit), the input code to the EDB interface would be 00. A binary code of 10 would set channel 3, allowing $\overline{DS_3}$ to go through. A summary of the codes is given in table 1.

The inputs to IC2 are offset by one channel due to the peculiar timing of the EDB. While the $\overline{DS_3}$ line is

Circle 28 on inquiry card. →



MODEL 800 - WITH SUNFLOWERS

A NEW MASTERPIECE IN PRINTERS

The MODEL 800 MST is certainly pleasing to look at, but its true beauty lies beneath the surface. A glimpse at its features reveals why it is rapidly becoming the most sought after printer in the world . . .

- Four standard interfaces:
  - RS-232 (15 baud rates)
  - Centronics compatible parallel
  - IEEE-488
  - 20ma current loop
- Six line densities: 64, 72, 80, 96, 120, 132
- 100 CPS at all six densities
- Unidirectional or bidirectional printing
- Sixteen horizontal and ten vertical tabs
- Elongated characters in all six densities
- 1920 character buffer
- Uses either perforated or roll paper
- Fully adjustable tractors to 9½"
- Auto self-test
- Up to 10 character fonts
  - Standard 96 character ASCII
  - User defined character font
  - Provision for up to eight additional fonts
- Dot resolution graphics in six densities
- Variable line spacing control from 0 to 64 dots in half-dot increments
- Auto form-feed for any form length at any line spacing
- Heavy-duty all aluminum chassis
- 110vac or 220vac, 50/60Hz.
- 100 million character printhead
- Measures only 15" wide, 3" high, and 11" deep
- Weighs only 15 lbs.

. . . . . but maybe its most attractive feature is the price . . . . . $699.00.

base 2 inc.

P.O. BOX 3548 FULL., CAL. 92634 / (714) 992-4344

physically tied to channel 0 and would appear to be addressed with a 00 input code, the edge-detector timing of the circuit is such that we are not latching the current digit's value, but the *next* digit's value, when we address the channel. However illogical it may seem, the codes that work are stated in table 1.

When we have selected which digit we want to read by setting the proper multiplexer-input code, that digit value will be latched into IC1 and available as a BCD value to the computer. IC3 buffers the CMOS (complementary metal-oxide semiconductor) voltage levels of the EDB to the TTL level required by most computers. To read a three-digit range, we simply set the three multiplexer codes in succession. To obtain the distance indication, just add the three values as follows:

$$\text{Distance} = (\text{MSD}) \times 10 + (\text{2nd digit}) \times 1 + (\text{LSD}) \times 0.1$$

This interface design is essentially speed-independent and can be driven equally well by an assembly-language or BASIC program. Listing 1 is a BASIC program that reads and displays the three-digit range determined by the ultrasonic ranging system.

```
RUN
**********      STEP 1
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********
**********      STEP 25
```

Figure 7a: *Bar graph of distance measurements taken by the scanning system as the ultrasonic transducer was pivoted in twenty-five steps through a 180° sweep around the Circuit Cellar (each asterisk represents approximately one-half foot). Note correspondence with floor plan in figure 7b.*

A More Sophisticated Scanner

The original article, "I've Got You in My Scanner!," previously mentioned, has been reprinted in the book *Ciarcia's Circuit Cellar*, volume 1, available from BYTE Books. Photo 8 is a close-up of the updated version of the scanner, which now includes the ultrasonic ranging detector. The basic scanner consists of a North American Philips stepper motor (12 V type K82701-P2) and integrated-circuit controller (SAA1027) with an infrared-sensitive photo Darlington transistor (General Electric type L14F2) fixed at the focus of a parabolic reflector mounted on the shaft. I used a Radio Shack solar cigarette lighter, catalog number 61-2797, as the parabolic reflector. The driver circuit for the stepper motor is outlined in figure 6. The original article explained the infrared sensing system in detail.

The new scanner has the ranging detector mounted on the stepper-motor shaft, above the parabolic reflector. Both point in the same direction. The stepper motor is driven through the SAA1027 with 3 bits of a parallel output port. To drive the motor clockwise, bit 1 is set low, bit 2

Text continued on page 56

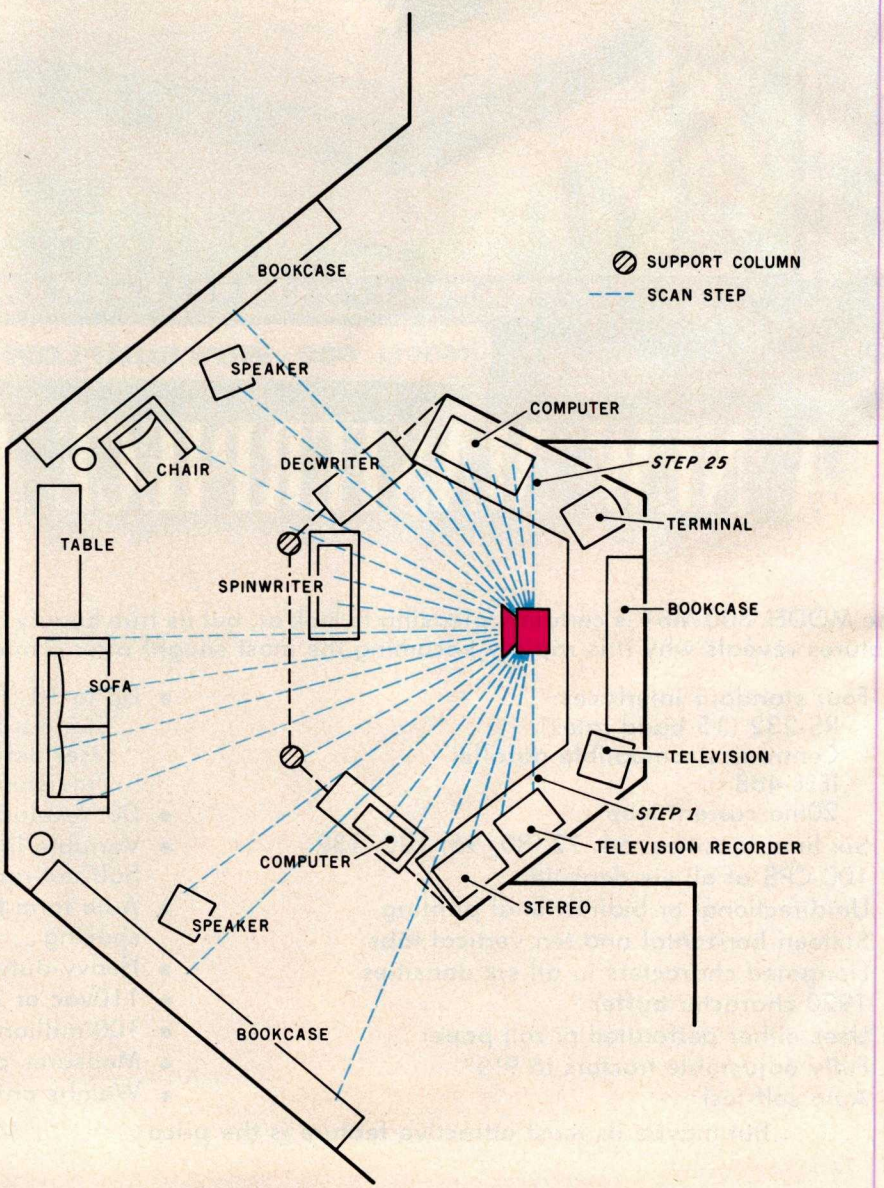


Figure 7b: *Floor plan of Circuit Cellar showing location of scanner and beam paths to room objects during the twenty-five steps in the scanning sweep. Bar graph of figure 7a shows relative distance to the nearest obstruction in the beam path at each step.*

Circle 29 on inquiry card. →



NOW: AN ORIGINATE/ANSWER 103 FOR LESS THAN $200

- Switch-selectable originate/answer
- FCC certified for direct-connect
- Fits under your phone
- No AC required
- Only $195 (quantity one)

UDS technology now adds a Bell-compatible originate/answer 103 to the family of line-powered modems. No AC connection or power supply required; operating power comes directly from the phone line. The unit fits underneath your desk phone. With the TALK/DATA switch in the TALK position, you have an ordinary phone; move to DATA and you're in contact with the whole datacomm world at any speed up to 300 bps.

For details, contact: Universal Data Systems, 5000 Bradford Drive, Huntsville, AL 35805, Telephone 205/837-8100, TWX 810-726-2100

"Confidence in Communications"

Universal Data Systems


Member IDCMA

DISTRICT OFFICES: **Summit,** NJ, 201/522-0025 • **Blue Bell,** PA, 215/643-2336 • **Atlanta,** 404/952-3463 • **Chicago,** 312/441-7450 • **Dallas,** 214/385-0426 • **Santa Ana,** 714/972-4619 • **Sunnyvale,** 408/738-0433 • **Boston,** 617/875-8868.

Created by Dayner/Hall, Inc., Winter Park, Florida

Circle 30 on inquiry card.

SUPERBRAIN®

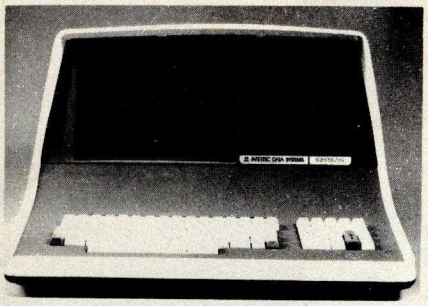

32K or 64K (Double or Quad Density units available). Uses two Z-80 CPU's. Commercial-type terminal with 12" monitor. Dual double density minifloppies. Over 350 kilobytes of storage (twice that with quad density drives). Two serial RS232 ports, I/O ports standard. Expandable with optional S-100 S-100 interface. Comes with CP/M™ 2.2 operating system. MiniMicroMart includes BASIC interpreter and can supply a wide range of CP/M Development and Application software.

w/32K Double Density, List $2995 . **$2685**
w/64K Double Density, List $3345 ..... **$2883**
w/64K Quad Density, List $3995 ..... **$3595**
64K Special Quad Version **$3395**

INTERSYSTEMS
formerly ITHACA AUDIO



DPS-1, List $1795

LIMITED TIME $1299*

The new Series II CPU Board features a 4 MHz Z-80A CPU and a full-feature front panel. 20-slot actively terminated motherboard, with 25 amp power supply (50/60 Hz operation, incl. 68 cfm fan).

COMPLETE SYSTEM with InterSystem 64K RAM, I/O Board w/priority interrupt and double density disk controller board. Full 1-year warranty, List $3595


ONLY $2895*

Above less disk controller, $3195 ..... **$2539***

* Limited Time offer expires Sept. 15, 1980.

HEWLETT-PACKARD
HP-85A

Desk-Top Computer



Call for Price!

F.O.B. shipping point. All prices subject to change and all offers subject to withdrawal without notice. Advertised prices are for prepaid orders. Credit card and C.O.D. 2% higher. C.O.D. may require deposit.

— WRITE FOR FREE CATALOG —

MiniMicroMart
1618 James Street
Syracuse, NY 13203 (315) 422-4467

Listing 1: *A BASIC program that uses the interface circuit shown in figure 5 to read the three-digit distance value from the EDB and display the distance on the computer printer. A sample execution follows the BASIC-language statements.*

```
100 REM    THIS PROGRAM ALLOWS A COMPUTER TO READ AND DISPLAY
110 REM    DISTANCE AS MEASURED BY THE POLAROID ULTRASONIC
120 REM    RANGING SYSTEM DEMONSTRATOR BOARD. RANGE .9 TO 35 FT.
130 REM
140 REM
150 GOSUB 250
160 PRINT"DISTANCE TO TARGET IS ";S;" FEET"
170 GOTO 150
180 REM
190 REM
200 REM    THIS ROUTINE SETS AND READS THE 3 DIGITS ON THE
210 REM    RANGING BOARD.
220 REM    IT IS A THREE STEP PROCESS: SET THE DIGIT; READ THE
230 REM    DIGIT VALUE; AND MASK OFF EVERYTHING EXCEPT THE 4 BIT
240 REM    CHARACTER.
250 FOR T=0 TO 2
260 OUT 16,T
270 S(T)=INP(16)
280 S(T)=S(T) AND 15
285 S=(S(2)*10)+(S(1)*1)+(S(0)*.1)
290 NEXT T
300 RETURN


RUN

DISTANCE TO TARGET IS  3.3  FEET
DISTANCE TO TARGET IS  3.4  FEET
DISTANCE TO TARGET IS  3.5  FEET
DISTANCE TO TARGET IS  3.4  FEET
DISTANCE TO TARGET IS  3.3  FEET
DISTANCE TO TARGET IS  3.4  FEET
DISTANCE TO TARGET IS  3.3  FEET
DISTANCE TO TARGET IS  3.4  FEET
DISTANCE TO TARGET IS  3.4  FEET
DISTANCE TO TARGET IS  3.5  FEET
DISTANCE TO TARGET IS  3.3  FEET
```

Listing 2: *A BASIC program that causes the scanner to make a 180° scanning sweep in twenty-five steps and prints the distance measurements in the form of a bar graph. Figure 7a shows the output from the execution of this program on the system set up in the Circuit Cellar.*

```
100 REM THIS PROGRAM MAKES A 180 DEGREE SCAN AND RECORDS THE
110 REM DISTANCE TO SOLID OBJECTS EVERY 7.5 DEGREES.
120 REM
130 REM STEPPER MOTOR CONTROLLER ATTACHED TO PORT 18
140 REM ULTRA SONIC RANGING UNIT ATTACHED TO PORT 16
150 REM
160 REM
170 DIM Z(25)
180 OUT 18,1 :OUT 18,255 :REM PRESET STEPPER CONTROLLER
190 REM
200 REM CLOCKWISE SCAN
210 REM BIT 2 IS SET HIGH AND BIT 0 IS TOGGLED
220 FOR D=0 TO 24
230 OUT 18,5
240 GOSUB 470
250 OUT 18,4
260 NEXT D
270 REM
280 REM COUNTERCLOCKWISE SCAN
290 REM BITS 1 AND 2 ARE HELD HIGH AND BIT ZERO IS TOGGLED
300 FOR D=0 TO 24
310 OUT 18,7
320 GOSUB 570
330 OUT 18,6
340 NEXT D
350 REM
```

Listing 2 continued on page 56

Circle 31 on inquiry card. →

STOP PLAYING GAMES AND GET DOWN TO BUSINESS

Corvus Transforms the Personal Computer into a Powerful Business Tool.


In business, professional offices, and schools throughout the world, thousands of Corvus intelligent peripherals bring mass storage, increased speed, and multi-user capability to a variety of microcomputers. Current applications include accounts receivable and payable, medical records, mailing lists, inventories, word processing, insurance, mathematics and science, and other large and complex files.

Corvus proven Winchester disk technology provides 10 to 80 million bytes of capacity, fully compatible with your current operating system. This is up to 500 times the capacity of a floppy disk.

The Corvus CONSTELLATION links up to 64 computers in a state-of-the-art multi-processor network. It provides shared mass storage, pipes for inter-computer communication, and system spooling for sharing of peripherals such as printers. Performance far exceeds that of larger and more expensive networks.


Backup data protection and archival storage are provided by the Corvus MIRROR (Patent Pending), a low-cost backup using standard video cassette recorders.

Contact your local Corvus dealer for the full story about these innovative new products.

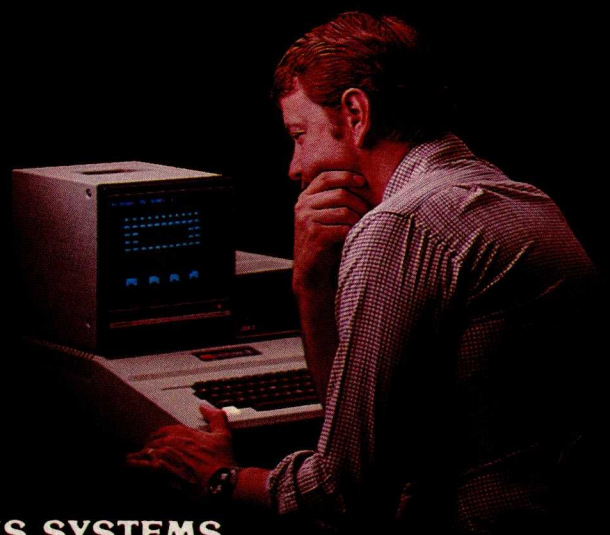

CORVUS SYSTEMS
2029 O'Toole Avenue
San Jose, California 95131
(408) 946-7700 / TWX 910-338-0226



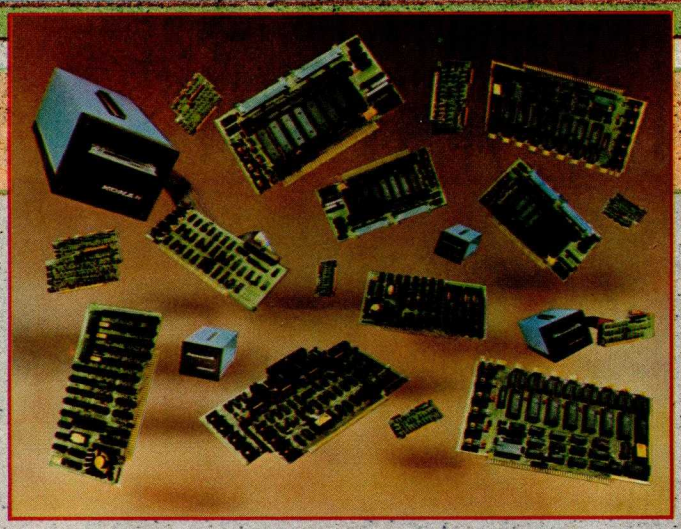

New power at your fingertips.

Konan presents Hard Disk Control, Tape Control, and Serial I/O Boards for S-100 computers. Konan, known throughout the industry for its leading, innovative, guaranteed controllers for S-100 systems, does it again. Now, it offers you more of the expanded capabilities you need.

First, there's Konan's complete line of hard disk mass storage subsystems and controllers. These high reliability products include the SMC-100™ storage module (SMD or CDC 9760 interface) hard disk controller for the S-100 Bus, DAT-100 Winchester type hard disk tape backup controller, the HARD TAPE™ system, and the new KNX-500™ hard disk controller which is software compatible with Alpha Micro AM-500*. Also, coming soon: Shugart technology mini hard disk controller and 9 track reel to reel tape controller.

Now, Konan introduces OCTOPLUS™ and OMNIPORT™... two new serial I/O boards. OCTOPLUS™, the 8-port board, offers a real time clock and full interrupt control. And the 16 port OMNIPORT™ offers you an efficient, economical board where more than 8 ports are needed.

With these and other quality products, Konan shows again that when it comes to S-100 systems, it is definitely in control. (And all at attractive O.E.M. and dealer prices.)

For complete information, call Konan's direct, toll-free information line: **800-528-4563.**

Or write to: Konan Corporation, 1448 North 27th Avenue, Phoenix, AZ 85009, TWX/TELEX 910 951 1552

KONAN
KONAN
KONAN™

*Alpha Micro AM-500 is a trademark of Alpha Micro Systems.

IN CONTROL, SMC-100, HARD TAPE, KNX-500, OCTOPLUS, and OMNIPORT are trademarks of Konan Corporation.

Circle 32 on inquiry card.

IN CONTROL

Circle 33 on inquiry card.

MTI stocks 'em all for faster delivery.

No hidden charges. Prices include delivery.
VISA and MasterCard orders accepted.

VIDEO TERMINALS	
VT100 DECscope	$ 1750
VT132 DECscope	2295
ADM-3A (dumb terminal)	*
ADM-3A+ (dumb terminal)	*
ADM-31 (2 page buffer)	*
ADM-42 (8 page buffer avail.)	*
1410 (Hazeltine dumb terminal)	825
1420 (dumb terminal)	895
1421 (Consul 580 & ADM-3A comp.)	895
1500 (dumb terminal)	1045
1510 (buffered)	1145
1520 (buffered printer port)	1395
1552 (VT-52 compatible)	1350
300 BAUD TELEPRINTERS	
LA34-DA DECwriter IV	1045
LA34-AA DECwriter IV	1295
Teletype 4310	1085
Teletype 4320	1225
Diablo 630 RO	2295
Diablo 1640 RO	3085
Diablo 1640 KSR	3285
Diablo 1650 RO	3185
Diablo 1650 KSR	3385
TI 743 (portable)	1190
TI 745 (portable/built-in coupler)	1585
TI 763 (portable/bubble memory)	2690
TI 765 (port/bubble mem/b-i coupler)	2895
600 BAUD TELEPRINTERS	
TI 825 RO impact	1565
TI 825 KSR impact	1645
TI 825 RO Pkg.	1750
TI 825 KSR Pkg.	1895
1200 BAUD TELEPRINTERS	
LA120-AA DECwriter III (forms pkg.)	2245
LA180 DECprinter I	2195
TI 783 (portable)	1745
TI 785 (port/built-in coupler)	2395
TI 787 (port/internal modem)	2845
TI 810 RO impact	1800
TI 810 RO Pkg.	2047
TI 820 KSR impact	2057
TI 820 KSR Pkg.	2275
TI 820 RO	1895
TI 820 RO Pkg.	2047
2400 BAUD	
Dataproducts M200 (2400 baud)	2595
DATAPRODUCTS LINE PRINTERS	
B300 (300LPM band)	5535
B600 (600LPM band)	6861
2230 (300LPM drum)	7723
2260 (600LPM drum)	9614
2290 (900LPM drum)	12655
ACOUSTIC COUPLERS	
A/J A242-A (300 baud orig.)	242
A/J 247 (300 baud orig.)	315
A/J AD342 (300 baud orig./ans.)	395
A/J 1234 (Vadic compatible)	895
A/J 1245 (300/1200 Bell comp.)	695
MODEMS	
GDC 103A3 (300 baud Bell)	395
GDC 202S/T (1200 baud Bell)	565
GDC 212-A (300/1200 baud Bell)	850
A/J 1256 (Vadic compatible)	825
CASSETTE STORAGE SYSTEMS	
Techtran 816 (store/forward)	1050
Techtran 817 (store/for/speed up)	1295
Techtran 818 (editing)	1795
Techtran 822 (dual)	2295
MFE 5000 (editing)	1495
FLOPPY DISK SYSTEMS	
Techtran 950 (store/forward)	1395
Techtran 951 (editing)	1995

*Please call for quote.

mti

Applications Specialists & Distributors
Great Neck, New York/Cleveland, Ohio.

N.Y.: 516/482-3500 & 212/895-7177
800/645-8016. Ohio: 216/464-6688

Listing 2 continued:

```
360 REM
370 REM PLOT RANGES AS BAR GRAPH
380 FOR D=0 TO 24
390 FOR W=1 TO INT(Z(D))
400 PRINT"**";
410 NEXT W
420 PRINT" "
430 NEXT D
440 GOTO 220
450 REM
460 REM
470 REM STEP DELAY AND RANGE SAMPLE ROUTINE
480 FOR T=0 TO 2
490 OUT 16,T
500 S(T)=INP(16) :S(T)= S(T) AND 15
510 NEXT T
520 Z(D)=(S(2)*10)+(S(1)*1)+(S(0)*.1)
530 FOR Q=0 TO 10 :NEXT Q
540 RETURN
550 REM
560 REM
570 FOR Q1=0 TO 100 :NEXT Q1
580 RETURN
```

Listing 3: *A short BASIC program that demonstrates one method for using the ultrasonic scanning device in a security system.*

```
100 REM THIS PROGRAM DEMONSTRATES HOW THE ULTRASONIC RANGING
110 REM BOARD CAN BE USED AS AN INTRUSION DETECTOR.
120 REM
130 REM
140 A=1 :GOSUB 220 :REM  TAKE FIRST DISTANCE READING
150 GOSUB 330
160 A=2 :GOSUB 220 :REM  TAKE SECOND DISTANCE READING
170 IF ABS(X(1))-ABS(X(2))>=.3 THEN GOTO 280
180 IF ABS(X(2))-ABS(X(1))>=.3 THEN GOTO 280
190 GOTO 140 :REM CONTINUE SCAN
200 REM
210 REM
220 FOR T=0 TO 2
230 OUT 16,T
240 S(T)=INP(16) :S(T)=S(T) AND 15
250 NEXT T
260 X(A)=(S(2)*10)+(S(1)*1)+(S(0)*.1)
270 RETURN
280 PRINT" I GOT YOU IN MY SCANNER AT ";X(2);" FEET."
290 REM AN ALARM ROUTINE WOULD BE PLACED HERE
300 GOTO 140
310 REM
320 REM
330 REM SAMPLE RATE DELAY TIMER
340 FOR Y=0 TO 200 :NEXT Y
350 RETURN


RUN

I GOT YOU IN MY SCANNER AT 11.4 FEET.
```

Text continued from page 50:

is held high, and bit 0 is toggled to produce each step. To drive the motor counterclockwise, bits 1 and 2 are held high, and bit 0 is toggled for each step. The new scanner can read the distance at each step.

Listing 2 is a program that causes the scanner to make a 180° scan and prints out the distance measurements in the form of a bar graph, demonstrated here in figure 7a.

To help you understand the mode of operation and value of the ranging device, I have also sketched the area of the Circuit Cellar where the measurements were taken. (See figure 7b.)

The scanner (the red object in figure 7b) was placed on a tripod at a




INTRODUCING VIDEOPRINT:
The picture perfect peripheral.

Videoprint 3000 is the convenient economical means of obtaining distortion-free hardcopy from your Apple computer graphics display in full, brilliant color. The entire system is self contained in the convenient desk-top unit shown above.


Videoprints eliminate such off-the-screen photography problems as barrel distortion, color desaturation and loss of color fidelity. Videoprints also minimize the effects of raster lines and video noise.


Videoprints are instantly produced with Polaroid® SX-70 or Polacolor 4″x 5″ films, as well as with conventional color negative or 35mm slide transparency films, offering you a range of handy sizes. The pictures are made at the push of a button.

If you've ever wanted to distribute copies of computer graphics or file them in your permanent records, or send them through the mail or project them as slides, you need Videoprint.

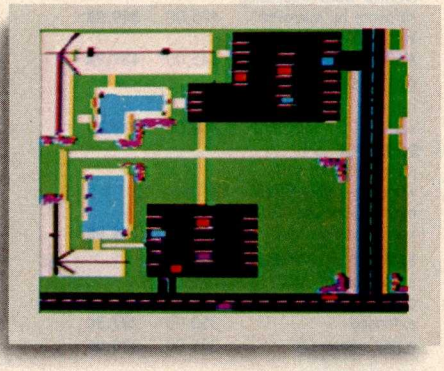



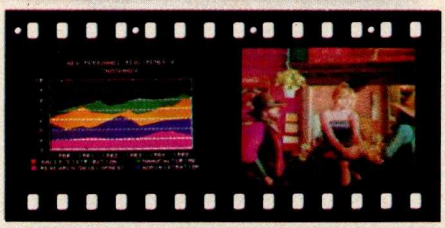

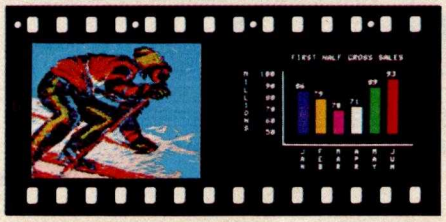

Hook up to one single cable and you're ready to capture any image on the Apple monitor screen. Other personal computers with color graphics capability work with the Videoprint 3000, too.

In fact, if you use computer graphics in any form, you really need Videoprint 3000. Find out all about this exciting new tool. Write or call us today for your local dealers' location.

IMAGE RESOURCE
The Videoprint People.

Image Resource Corporation
2260 Townsgate Road, Westlake Village, CA 91361
(805) 496-3317

Videoprints shown were produced by an Apple II with graphics tablet, or by live images on ¾″ videotape.

"Polaroid," "Polacolor" and "SX-70" are registered trademarks of the Polaroid Corporation.

Circle 34 on inquiry card.

height of 5 feet (1.5 meters), about 2 feet (0.6 meters) in front of my desk area. The parabolic reflector was pointed 90° to the left of center so that a 180° scan resulted in it ending up pointing 90° right of center. At each of the twenty-five steps it took to reach this point, it measured the distance to the nearest obstruction to its line of detection. For comparison, the blue dotted lines in figure 7b show where each step should have been and what should have been in the way of the sonar "beam."

The program of listing 2 printed the graph bar corresponding to each step, starting with step 1. At the position reached after step 1, the system recorded a distance of about 5 feet (1.5 meters) to the VTR (videotape recorder) on the counter top. The same result was obtained for the next two steps. At the position reached after step 4 (about 30° around), the scanner was pointing between the stereo system and the TRS-80 computer on the desk to the right. This was indicated by a reading of about 15 feet (4.6 meters), measuring the distance to the bookcase on the far wall.

The next couple of steps had the TRS-80 directly in the path of the scanner beam, and then the path of the beam was open to the far wall again for a couple of steps. The rest of the scan was similarly significant in that the range detector accurately described the perimeter from its viewpoint. Most important, however, was the demonstration of the sensitivity of the ranging device. At steps 9 and 16, the only object in the path between the scanner and the wall was a 4-inch (10 cm) ceiling-support column about 7 feet (2.1 meters) away. In both cases the obstruction was accurately identified.

We now have a device that can rotate to a particular position and accurately measure the distance to any object it "sees." A practical use of the range detector is as a security device. When the wall is known to be 16 feet (4.8 meters) away from the scanner, a sudden reading of 9 feet (2.7 meters) indicates that someone or something just moved in front of the range detector. The program of listing 3 allows the range detector to be used as a motion detector.

In Conclusion

I have demonstrated only two uses for the Polaroid Ultrasonic Ranging System Demonstrator Kit. The majority of applications I've heard about thus far have been independent projects that utilize the ranging system *without* the additional capabilities of a computer. They include a walking cane (with audio feedback) for the visually handicapped, a 0 to 35 foot (0 to 11 meter) altimeter for the *Gossamer Albatross* aircraft (for its English Channel crossing), and as an electronic "dip stick" for measuring liquid levels in storage tanks.

I hope that once you realize how easy it is to attach this automatic ranging system to a computer, you'll have as much fun experimenting with it as I have. Unfortunately, a new problem has arisen. Until now, one of the major reasons I haven't attempted to build a robot was the amount of expense and technical effort required to make it "see." Now I'll have to find a new excuse. ■

Next Month:
Automated testing of electronic products using programs written in a high-level computer language.

Microhouse. Microprice.

We will attempt to meet or beat any advertised price on hardware or software!

INDUSTRIAL MICRO SYSTEMS, the industrial-strength microcomputers priced like the lightweights. All IMS systems feature a Z80 4 mHz CPU, S-100 bus with 10 (series 5000) or 12 (series 8000) slot motherboard, DMA (IBM-compatible) double-density floppy disk controller, 32K high speed (250 nS) static RAM, rugged power supply, two RS232 serial ports and one parallel port (all expandable). Each IMS system comes in your choice of an attractive desk-top or rackmount enclosure. CP/M is included.

SERIES 5000 with 5 1/4" drives
With two single-sided, double-density drives **$2531.20**
With two double-sided, double-density drives **2908.75**

SERIES 8000 with 8" drives
With one single-sided, double-density drive **$3359.00**
With two single-sided, double-density drives **4029.00**
With one double-sided, double-density drive **3659.00**
With two double-sided, double-density drives **4549.00**

HIGH SPEED IMS S-100 MEMORY BOARDS

16K 250 nS static RAM	**290.00**
32K 250 nS static RAM	**585.00**
64K Dynamic RAM	**937.50**

CALL FOR MORE INFORMATION ON THE NEW IMS/SHUGART 8" WINCHESTER SYSTEM

FROM THE PRINT SHOP...

CENTRONICS PRINTERS	List	Microhouse
730-1 100 cps 80 col.	$795.00	**$639.00**
730-3 same with RS232 interface	845.00	**718.00**
737-1 Letter-quality dot-matrix	995.00	**849.00**
704-9 180 cps, 132 col., RS232 interface	2180.00	**1895.00**
700-9 60 cps, 132 col.	1375.00	**1149.00**
TEXAS INSTRUMENTS PRINTERS		
810 RO, 150 cps, 256 FIFO buffer	1895.00	**1580.00**
820 RO, 150 cps, 1280 FIFO, full ASCII	1995.00	**1679.00**
NEC SPINWRITERS		
5510 SERIAL or 5530 PARALLEL	3055.00	**2459.00**

THE GOOD SILVER

	List	Microhouse
WORDSTAR 2.1 The premier word-processing software by MicroPro	495.00	**349.98**
WORDSTAR 2.1 with MailMerge	645.00	**489.98**
DATASTAR data entry, retrieval, and update system from MicroPro	350.00	**279.98**
SUPERSORT sort/merge/extract software gives your CP/M micro the power of a key-to-disk system	250.00	**199.98**
BASIC 80 INTERPRETER by Microsoft, ANSI compatible, disk-extended	350.00	**287.50**
BASIC COMPILER	395.00	**330.00**
WHITESMITHS C conforms to full UNIX version 7 C. One of the best C compilers for micros on the market	620.00	**600.00**
TCS/Atlanta Accounting System:		
General Ledger	compare at 530.00	**175.00**
Accounts Receivable	compare at 530.00	**175.00**
Accounts Payable	compare at 530.00	**175.00**
Payroll	compare at 530.00	**175.00**
All four packages		**595.00**
Sample printouts (all 4 pkgs included)		**10.00**
Manuals (one pkg per manual)	Each	**35.00**

CALL OR WRITE FOR FREE CATALOG

MasterCard VISA

MASTER CARD OR VISA WELCOME


PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Microhouse™

511 North New Street Bethlehem, PA 18018 (215) 868-8219

Circle 35 on inquiry card.

When you pick a Daisy...
Pick Vista's V300 Printer.

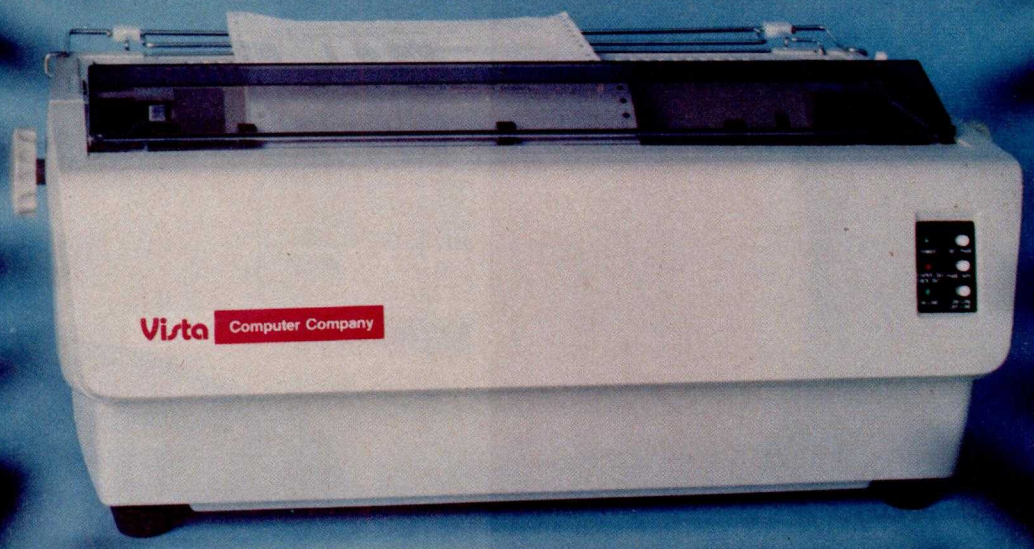

$1895.

There are Daisies!. . . And, There are Daisies!. . . But Vista has a Peach!

The Vista V300 is exactly that, a "peach" of a daisy wheel printer both from the standpoint of price and performance.

Think of it, a printer at nearly half the price (when compared to models even remotely competitive in quality) combined with the ultimate in reliability, print quality, and flexibility.

Typical Comments: "Superb print quality!", "Highly reliable.", "Definitely letter quality. . . I can't believe the price tag.", "Best use I've seen yet of LSI Technology."

But judge for yourself — look at the V300 features and keep in mind this is a letter quality printer at dot matrix prices.

- **Tractor option available**
- **Print Speed — 25 CPS (Optional 45 CPS for $2,195)**
- **Print Wheel** — Industry standard 96-character Daisy Wheel (including the extended-life dual plastic wheels)
- **Service** — Prompt maintenance/service agreements available nationwide
- **Interface** — Industry standard parallel (RS232-C optional)
- **Printable Columns** — 136
- **Warranty — 90 days parts and labor, one year parts only**
- Proportional, bi-directional printing • Programmable VFU
- Extensive self-test functions • Hardware and software compatible

Vista does it again! Quality, Price and Performance with a peach of a daisy wheel printer.

AND, Vista Has a Complete V100 Word Processing System for Only $4995!

The Vista V100 is a complete word processing system that includes:

- Exidy Sorcerer Computer, 48K
- V200E20 Disc Drive System, Double Density
- Sanyo Data Display Monitor
- Vista V300 Printer Full Character Daisy Wheel
- Wordstar, CPM 1.4 (Includes E Basic)
- Can also be used for Data Processing

Vista

IMMEDIATE DELIVERY
For Further Information
Call Toll Free (800) 854-8017

The Vista Computer Company 1401 Borchard Street • Santa Ana, California 92705 • 714/953-0523



OUR MEDIA IS

Over the past seven years we've earned a name for ourselves by making the best magnetic media in the business. Precision magnetic media — Diskettes, Mini Diskettes, Diagnostic Diskettes, Rigid Discs, Disc Packs, and Disc Cartridges — all certified to be 100% error free both on-track **and** between the tracks.

Now we're making it easier for you to buy the best. Just dial Dysan direct TOLL FREE at 800/538-8150 or 408/988-3472 (in California) or contact your local Dysan office listed below.

Precision magnetic media from Dysan. Our media says it all.

dysan Dysan CORPORATION

5440 Patrick Henry Drive
Santa Clara, CA 95050
408/988-3472



Call your local Dysan office:

Dysan Corporation
5440 Patrick Henry Drive
Santa Clara, CA 95050
408/988-3472

19600 Fairchild
Suite 150
Irvine, CA 92713
714/851-9462


13201 Bell Red Road
Suite 205
Bellevue, WA 98004
206/455-4725

OUR MESSAGE.

Kinetic String Art for the Apple

Louis Cesa, 305 Doris Ave, Vestal NY 13850

The accompanying photographs were produced using high-resolution graphics on the Apple II computer. As interesting as the pictures are, they do not do justice to the real-time art that takes place on the screen. The photographs show only time slices at different stages in the development of the kinetic string art. On the screen one can see shapes forming and gradually being replaced by other shapes in a continuous display of color and motion.

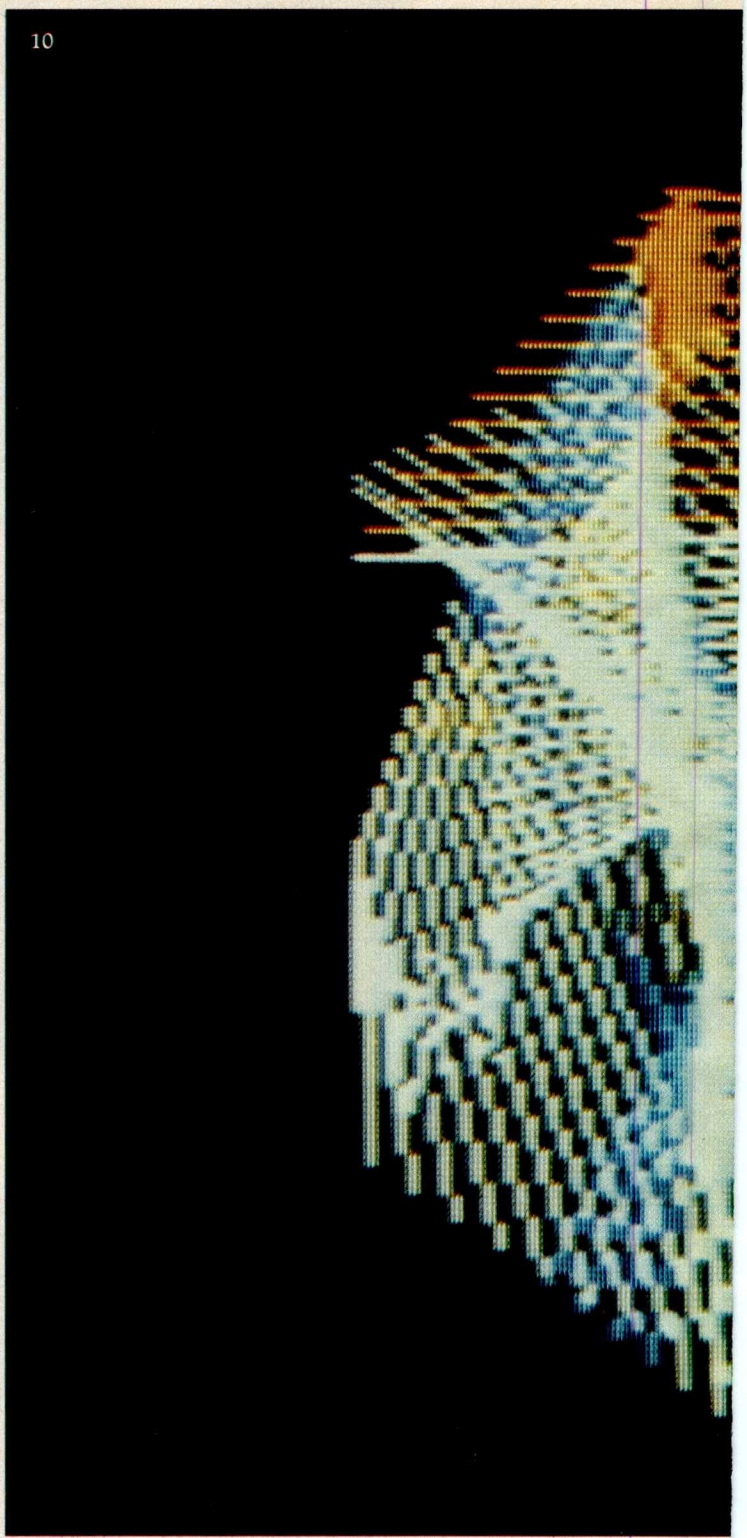

Algorithm Description for Kinetic String Art Program

1. Initialize Variables:

```
X1=X2=Y1=Y2=CNT1=CNT2=0;
DIM C(150), TX1(150), TX2(150), TY1(150),
 TY2(150);
AT=1
```

2. Erase the line from TX1(AT), TY1(AT) *to* TX2 (AT), TY2(AT) *of color* C(AT).

3. If CNT1=0 then choose a new random color and a new random CNT1.

```
COLOR=1+RND(3)
CNT1=5×(1+RND(10))
```

4. If CNT2=0 *then choose new step sizes for* DX1, DY1, DX2 *and* DY2 *and a new random* CNT2:

```
DX1=RND(9)−4
DY1=RND(9)−4
DX2=RND(9)−4
DY2=RND(9)−4
CNT2=5×(1+RND(10))
```

5. Compute new X1, Y1, X2, Y2 *for next line and test for screen boundaries. For example,*

```
470 PX1=X1+DX1
480 IF PX1>=0 AND PX1<= MX THEN 500
490 PX1=X1: DX1=−DX1
500 X1=PX1
```

6. Draw the new line from X1, Y1 to X2, Y2.

7. Store the coordinates and color of the new line in:


C(AT), TX1(AT), TX2(AT), TY1(AT), TY2(AT)

8. Step AT to next position in table.

```
AT=AT+1
IF AT > 150 THEN AT=1
```

9. Go to step 2.

The algorithm used is quite simple. (See textbox. Contractual agreements preclude publishing a listing of the program.) The pictures are drawn by a line segment making a random walk on the screen. An initial pair of endpoints is chosen at random; also chosen at random are color, number of lines to be drawn with that color, step size for each endpoint (in the x and y directions), and number of times that the step sizes are to be used. Successive lines are drawn by advancing the endpoints of the line by the chosen step size in the x and y directions.

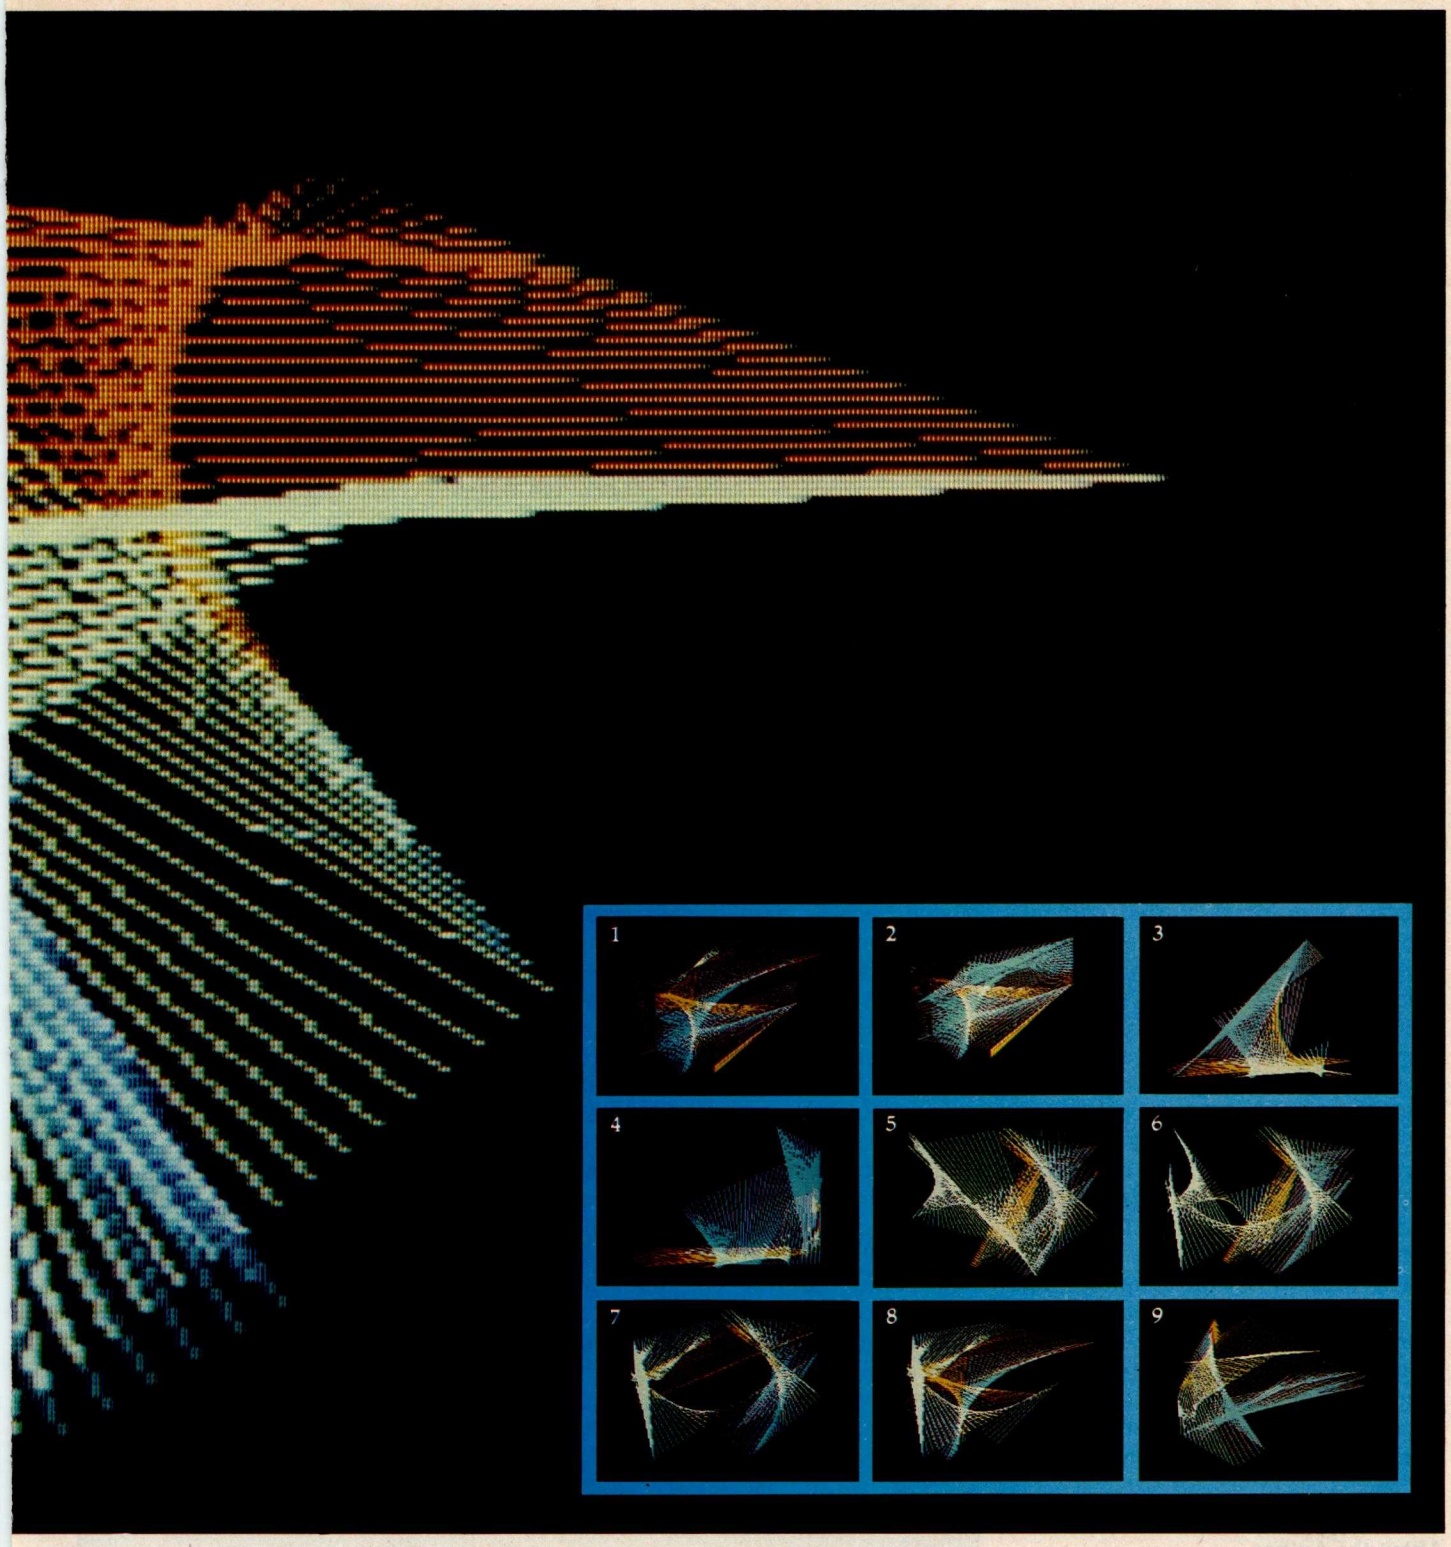

Whenever the number of times that an action was to be executed (such as number of lines to be drawn in a given color) is exhausted, new random values for that quantity and for the number of times that the quantity should be used, are chosen. If a point attempts to walk off the screen, it is reflected back.

The designs in the accompanying photographs are formed by 150 lines. The program was coded so that when the 151st line is added, the first line is deleted, and so on. This is done by a routine that keeps track of each line segment currently on the screen. When the table contains 150 lines, this routine erases the oldest line segment before adding a new one. (This effect can be noted in photos 1 and 2.) Interesting effects can be obtained by using different algorithms to choose the new line to be added at each iteration. For example, an interesting effect is obtained with just 10 lines on the screen and choosing random endpoints for each new line (essentially a visual image of white noise).■

Micrograph

Part 1: Developing an Instruction Set for a Raster-Scan Display

E Grady Booch
4314 Driftwood Dr
Colorado Springs CO 80907

Simply stated, computer graphics is the technique of visual communication from computer to man. (See reference 14.) Interactive computer graphics is an important subset of this broad field and relates to computer-generated displays that can interact with a user in real or near-real time. Interactive graphics started with attempts to use the CRT (cathode-ray tube) as a computer output device. (See reference 12). The Whirlwind I in 1950 and Sketchpad in 1963 are examples of early attempts at interactive computer-graphics systems. Since that time, two distinct classes of CRT-based devices have been developed for use in interactive graphics: calligraphic (or vector) devices and raster-scan (as in a television receiver) devices.

The area of vector graphics "has for several years been sufficiently mature to justify efforts at standardization within it." (See reference 8.) A large body of information is available on the design of such systems. (See reference 13.) However, the same is not necessarily true of raster-scan devices. Until recently, raster-scan technology has not been economically feasible. Decreasing hardware costs, especially for memory, have facilitated the trend toward raster-scan displays. (See reference 3.) The emergence of raster-scan displays has a side benefit, namely that "raster-scan technology is the only economical way to achieve color in full-sized displays." (See reference 4.)

For the microcomputer user, this means that he can add moderate-resolution color graphics to a system at an affordable price, using raster-scan technology. The benefits of color graphics for the personal computer are obvious: not only are color displays dazzling and eye-catching, but more important, they add a new dimension for communicating with a computer. Microcomputers with color-graphics capabilities have been available for some time, such as the Apple II and the Compucolor. Within the past year, however, Motorola and AMI (American Microsystems Incorprated) have released a LSI (large-scale integration) chip, called a video-display generator, which performs all the video functions necessary to produce a color-graphics and alphanumerics display on a standard, unmodified color television. As a result, low-cost color-graphics displays are now possible for the personal computer user.

This three-part article presents the theory, design, and construction of a low-cost, color-graphics display processor called Micrograph, which is based on the Motorola MC6847 video-display generator. (See photo 1.) Essential characteristics of Micrograph are described in the text box. In the remainder of this article, I will review the characteristics of interactive computer-graphics systems, followed by an overview of the Micrograph design. Subsequent articles will concern the hardware construction details for Micrograph and the software necessary to control the system.

About the Author

E Grady Booch is currently a computer systems design engineer with the Air Force Space and Missile Test Center. He is involved with the development of a high-resolution color-graphics system for tracking missile launches. Grady received his bachelor of science and master of science degrees in computer science from the United States Air Force Academy and the University of California, Santa Barbara, respectively.

Micrograph Features:

- *64 by 64, 128 by 128, and 256 by 192 pixel resolutions are available.*
- *Up to eight different colors are displayed at one time.*
- *It contains a single-board processor, based on Zilog Z80 processor and Motorola MC6847 Video Display Generator.*
- *Construction cost: about $275 .*
- *High-level graphics primitives support.*
- *Both graphics and alphanumerics are supported.*
- *It interfaces to a host microcomputer via three 8-bit input/output ports (status, input, and output) and by radio-frequency or video entry to a standard, unmodified color television.*

Circle 37 on inquiry card. →

WHEN OPPORTUNITY KNOCKS ...



Open the door, and experience the dream. Your own business, the one you've always yearned for. No more limits on your creativity or earning potential. No more working for someone else.

If you're a successful computer professional and have access to some capital, chances are you could own a MicroAge Computer Store. MicroAge Computer Stores are built around a whole new concept of what a computer store should be. Designed to provide solutions, not just sell hardware.

MicroAge Computer Stores are firmly positioned in the business and professional marketplace. And as a MicroAge Computer Store owner, you'll be backed by one of the acknowledged leaders, industry pioneers in microcomputing. Contact the Director of Franchising today to receive a complete Franchise Information Package free of charge and at no obligation. Opportunity is knocking . . . you'll see what we mean.

MicroAge
COMPUTER STORE

1425 W. 12th Place • Tempe, AZ 85281 • (602) 967-1421

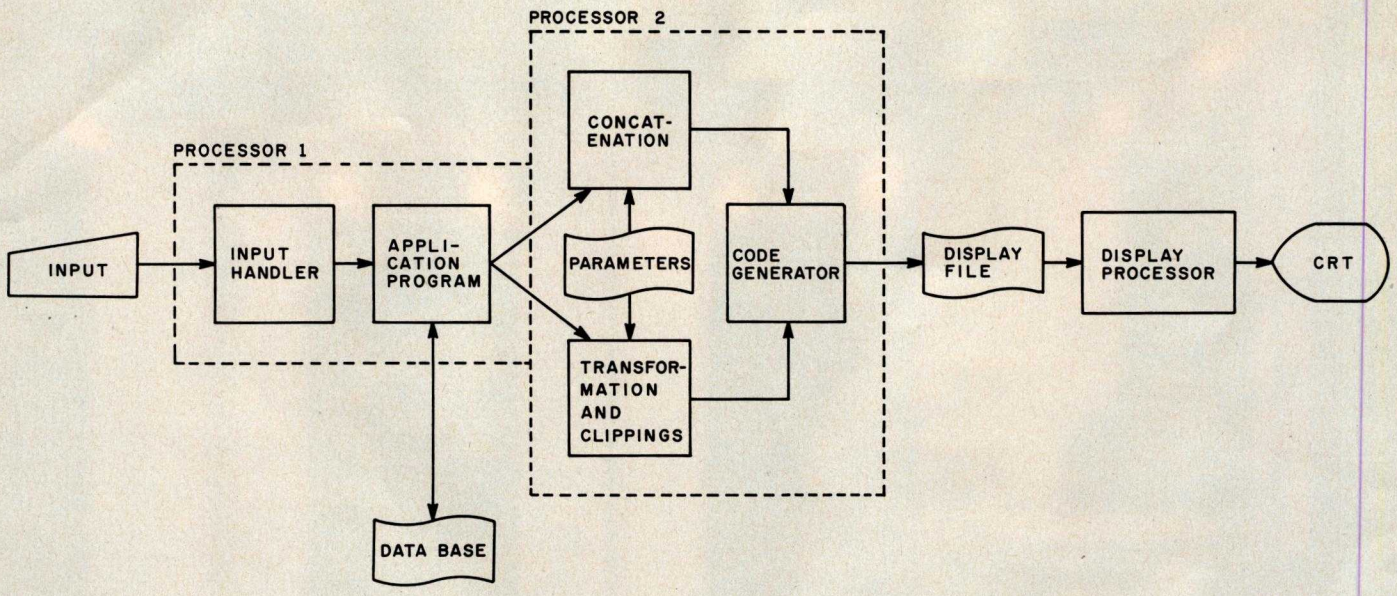


Figure 1: *A general block diagram of an interactive graphics-display system. The functions of Processor 1 and Processor 2 may be performed by the same device; however, the output of Processor 1 must be a structured abstract of the image to be displayed, for the graphics package (Processor 2) to operate. (The figure is from* Principles of Interactive Computer Graphics, *by Newman and Sproull. Copyright 1973, used with permission of McGraw-Hill Book Company.)*

Background on Interactive Computer-Graphics Systems

Newman and Sproull, in their book *Principles of Interactive Computer Graphics* (reference 12), present an excellent model of a generalized interactive graphics system, as reproduced in figure 1. Processor 1, which is not necessarily a different physical processor than Processor 2, handles program-specific processing for a particular graphics application. The output of this processor is generally a structured, abstract representation of the set of images that will be displayed.

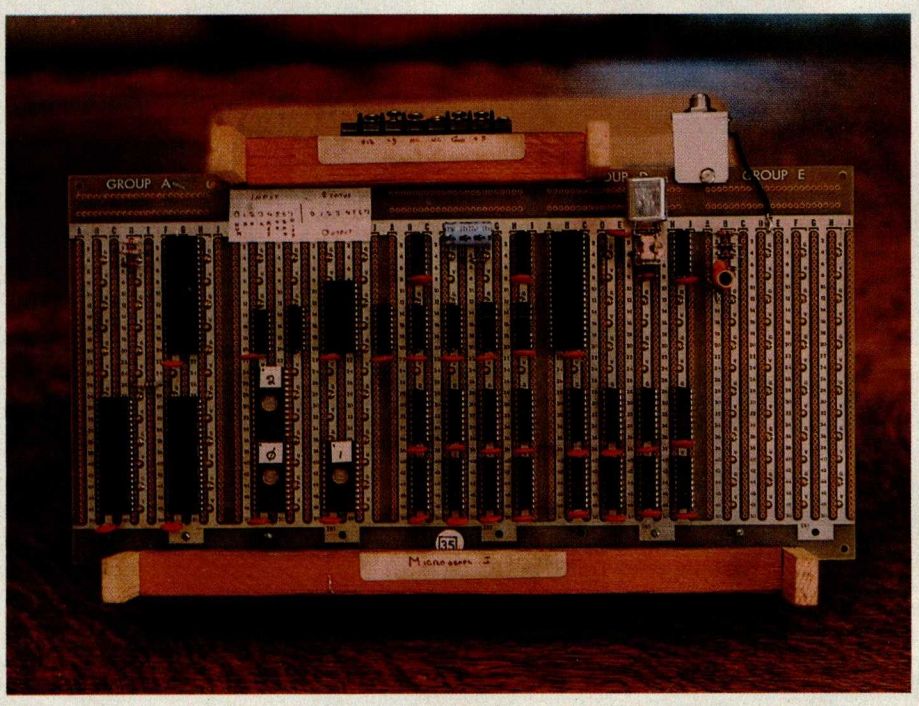



Photo 1: *A view of the completed Micrograph prototype, based on the Motorola MC6847 video-display generator. Use of this integrated circuit greatly simplifies hardware design by eliminating the complex divider-chains usually found in homebrew video displays.*

Processor 2 represents the processing that is to be handled by a graphics package, as it is commonly called. This processor manipulates the abstract representations, performing transformations (such as rotation, translation, and scaling) and clipping as needed. The output of this processor is generally a display file consisting of instructions that are meaningful to a physical display processor. The display processor uses these instructions to produce an image upon some type of display device. For interactive graphics, these processes must occur very rapidly.

Numerous graphics packages for commercial systems exist to handle the requirements of Processors 1 and 2. SIGGRAPH (Special Interest Group on Computer Graphics) of the ACM (Association for Computing Machinery) has proposed a standard for such systems. However, for our purposes, we must turn our attention to the display processor itself. Before examining the design for a color-

Circle 38 on inquiry card. →

UniFLEX™



Multi-User

UniFLEX is the first full capability multi-user operating system available for microprocessors. Designed for the 6809 and 68000, it offers its users a very friendly computing environment. After a user 'logs-in' with his user name and password, any of the system programs may be run at will. One user may run the text editor while another runs BASIC and still another runs the C compiler. Each user operates in his own system environment, unaware of other user activity. The total number of users is only restricted by the resources and efficiency of the hardware in use.



Multi-Tasking

UniFLEX is a true multi-tasking operating system. Not only may several users run different programs, but one user may run several programs at a time. For example, a compilation of one file could be initiated while simultaneously making changes to another file using the text editor. New tasks are generated in the system by the 'fork' operation. Tasks may be run in the background or 'locked' in main memory to assist critical response times. Inter-task communication is also supported through the 'pipe' mechanism.



Support

The design of UniFLEX, with its hierarchical file system and device independent I/O, allows the creation of a variety of complex support programs. There is currently a wide variety of software available and under development. Included in this list is a Text Processing System for word processing functions, BASIC interpreter and precompiler for general programming and educational use, native C and Pascal compilers for more advanced programming, sort/merge for business applications, and a variety of debug packages. The standard system includes a text editor, assembler, and about forty utility programs. UniFLEX for 6809 is sold with a single CPU license and one years maintenance for $450.00. Additional yearly maintenance is available for $100.00. OEM licenses are also available.

FLEX™

UniFLEX is offered for the advanced microprocessor systems. FLEX, the industry standard for 6800 and 6809 systems, is offered for smaller, single user systems. A full line of FLEX support software and OEM licenses are also available.

technical systems consultants, inc.
Box 2570, West Lafayette, IN 47906
(317) 463-2502 Telex 276143

™UniFLEX and FLEX are trademarks of Technical Systems Consultants, Inc.

graphics display processor, we must consider the characteristics of calligraphic and raster-scan displays.

Comparison of Display Devices

Four basic technologies exist to support interactive graphics:

- calligraphic
- raster-scan
- storage-tube
- plasma

Three of these devices (calligraphic, raster-scan, and storage-tube) are CRT-based, but only two (calligraphic and raster-scan) are adaptable to interactive, rapidly moving displays.

Calligraphic displays produce images by drawing vectors using endpoint information. A relative or absolute position is presented to the display, and the electron beam is deflected from its current position. Analog methods of vector generation can produce high-resolution vectors. Symbols are usually generated as a collection of vectors. Special hardware may also exist to produce circles and arcs, but these features are generally not cost-effective.

Calligraphic displays can achieve resolutions of up to 4096 by 4096 pixels (ie: picture elements) which corresponds to 16,777,216 elements (which is why I don't consider 256 by 256 pixels or even 512 by 512 pixels as "high resolution"). (See reference 11.) Therefore, a 21-inch-diagonal rectangular CRT will typically have a spot size of 0.02 inches (0.5 mm). (See reference 9.) Vectors using these techniques will appear sharp rather than granular. Several thousand vectors may be displayed flicker-free.

Calligraphic displays can produce color images using beam-penetration tubes. This type of CRT has multiple layers of phosphor coating on the face of the tube. Individual colors (usually four different colors) are produced by varying the anode voltage and hence the depth of beam penetration.

Raster-scan displays produce an image much like commercial television by generating a full screen of horizontal lines. This set of lines (the raster) is modulated in the Z axis (intensity and color) to produce an image. Vectors are drawn using digital scan-line-conversion techniques which compute every point along the vector. Symbols are usually generated using a character generator which directly plots each point of the symbol.

Raster-scan displays can achieve resolutions up to 2048 by 2048 in monochrome and 1024 by 1024 in color, which corresponds to roughly one million pixels (for color). (See reference 9.) The limited resolution for color displays results from the difficulty in producing shadow masks and the granularity of the phosphor-dot triples used in constructing the CRT. Because of the nature of the raster-scan CRT, the individual dots have insignificant overlap and therefore vectors appear coarse and stair-stepped. However, techniques such as *ordered-dithering* and *anti-aliasing* algorithms exist to reduce the effect of granularity. (See references 7, 10, and 12.) Stair-stepping (or aliasing) is most noticeable in near-

Glossary

Aliasing: *As used here, a granular or stair-stepped appearance in an image caused by the display screen being divided into a finite number of elements. This effect is most noticeable on low-resolution displays and on high-resolution displays with near-horizontal or near-vertical lines.*

Calligraphic Display: *A display that produces an image from a collection of vectors and points, by directing the electron beam in the X and Y directions corresponding to the vector endpoints.*

Display Processor: *A special-purpose peripheral processor that is dedicated to producing a visual image on some type of display (usually a CRT) based on special graphics instructions in a display list.*

Instancing: *The technique of defining one image, then being able to perform transformations to reproduce the same image in several different places on the display.*

Pixel: *A picture element.*

Raster-Scan Display: *A display that produces images, just as in television, by amplitude modulation of the Z-axis beam along a full screen of horizontal lines (the raster).*

Scan-Line Conversion: *An algorithm used to calculate each individual point along a vector, given the starting and ending points.*

Transformation: *Modifications of an image, such as translation (movement in the X, Y, or Z axis), rotation (also in any axis), and scaling (also in any axis).*

CALLIGRAPHIC DISPLAY		RASTER-SCAN DISPLAY	
Advantages	Disadvantages	Advantages	Disadvantages
● High resolution (4096 by 4096).	● Analog circuitry often requires adjustment.	● Digital circuitry is quite reliable.	● Moderate resolution (1024 by 1024 color).
● Thousands of vectors can be displayed.	● Limited colors (usually four).	● Many colors possible (more than 2^{16}).	● Digital scan-line conversion is slow.
	● Display has low brightness.	● Display is high intensity.	
	● Limited intensities are possible.	● Many (gray scale) intensities exist.	
	● Shading of large areas impossible.	● Shading areas is simple.	
	● Flicker occurs when too many vectors are displayed.	● Display does not flicker.	
	● Ghosting occurs on rapidly moving displays.	● Display has high contrast.	

Table 1: *Comparison of calligraphic (ie: vector) and raster-scan displays.*

Circle 39 on inquiry card. →

68000

When the 68K™ and 68K MiniFrame™ were first announced in June, the computer and data processing world responded to their incredible features with never-before-seen excitement!

The 68K constitutes **a new standard in the micro/mini computer industry.** The 68K boasts the power, features and speed of a mini computer, but at a micro price. **And our software is ready now — when you need it!** We are proud to offer this most complete 68,000 based product line!

The first two months of 68K production are already sold out! Place your 30% deposit now to reserve the next available unit!




Hardware	
68K Two Board Set (128K bytes RAM)	$3995
68K MiniFrame (256K bytes RAM)	$6995
Additional RAM (128K bytes)	$595
Software	
Disk Operating System	$500
68,000 Assembler	$350
Industrial Pascal Compiler	$400
Text Editor	$150
Floating Point	$100
Documentation	
Hardware Documentation	$100
Software Documentation	$100

Processor Type	Motorola MC68000 Motorola MC6809 for I/O, Disk, and memory management.
Processor Speed	8 MHz.
Bus Type	Proprietary connector. Adapters available for S-100, Versabus, and others.
RAM	Up to 512 KBytes. Additional RAM boards up to 4 billion bytes. Parity.
Memory Management	Relocation and limit registers, virtual memory, and demand paging.
PROM	1 to 32 KBytes firmware including I/O queueing and debugging, memory management.
Parallel I/O	4 Parallel ports. High-speed DMA port for Winchester or hard disk interface.
Serial I/O	6 Serial RS-232 ports.
Disk I/O	Single/Double Density Floppy Disk Controller for up to 4 8" Drives.
Other Features	Memory Management, Prioritized Interrupt Handling, DMA, Multiprocessing and Multitasking Capabilities. Virtual memory.
Disk Drives	Dual Shugart 8" Double Density.
Miniframe	19" Rack Mountable. Includes Power Supply and I/O Connectors, dual 8" disk drives.

MicroDaSys PO Box 36215, Los Angeles, CA 90036 (213)731-0876

SAY AH...HA!



For three years, MicroMed™ and MicroDent™ have been the finest micro-based medical and dental billing systems in the world. Now, in the latest revision, MicroMed and MicroDent represent the most complete, comprehensive, and cost-effective software billing packages ever.

If you are a physician considering the installation of a billing system for your medical or dental office, then MicroMed and MicroDent are for you.

The SoftwareHows™ division of MicroDaSys is a leader in solution-oriented office tools. Both MicroMed and MicroDent provide the most cost-effective way to automate your patient accounting and record keeping procedures.

MicroMed and MicroDent offer:

- —**Complete billing** for small practices or busy groups.
- —**Handling of any insurance forms** (including Medi-Cal, Champus, etc.)
- —**Automatic Patient Recall system.**
- —**Multiple insurance coverage** for any patient.
- —**Printing of patient statements automatically.**
- —**Instant recall of patient ledgers** on CRT or printer.
- —**Daily transactions include treatment details.**
- —**Insurance preauthorization** (dental).
- —**All the reports you need** for a successfull practice:
  - —**Activity reports itemized by physician.**
  - —**Daily, monthly and year-to-date totals by physician.**
  - —**Service profitability analysis.**
  - —**Aged accounts receivable.**
- —**Mail list data base** extracts patients on the basis of 15 selection criteria.
- —Mailing labels, lists and form letter facilities, all automatically.

Not only is your billing system a time and money saver, but best of all it entitles you to **terrific tax advantages.** MicroMed and MicroDent include **CBASIC2 source code and comprehensive documentation. And the price is right!** Version 1.60F (floppy based) is just $995 and Version 1.65FH (floppy and/or hard disk) is $1500. If you don't have the latest version 2.06 of CBASIC2, we can supply it for just $150. To get you started, we include sample computer forms. A Demo Disk is available to dealers, consultants and OEM's. **Call or write today for your free brochure, sample forms and reports.**

Then say Ah...HA!

Lucrative quantity discounts to dealers and OEMs.



SOFTWARE HOWS™
a division of
MicroDaSys P.O. Box 36275 Los Angeles, CA 90036 Phone: (213) 731-0876 TWX:9103212378

?

Did you see our October ad for the unique and powerful Data Base Integration™ accounting SolutionWare™?

- Management oriented
- Fully integrated
- Powerful
- Easy to use

In addition to our superior **Accounts Payable** and **Receivable, General Ledger** and **Payroll** modules, **OrderRight™, MicroDaSys Inventory™,** and **VersaSort™** make the SoftwareHows DBI™ business package the only serious choice for today's software needs.

Don't hesitate! Call or write today and **ask us why our business software sets a new standard of excellence!**

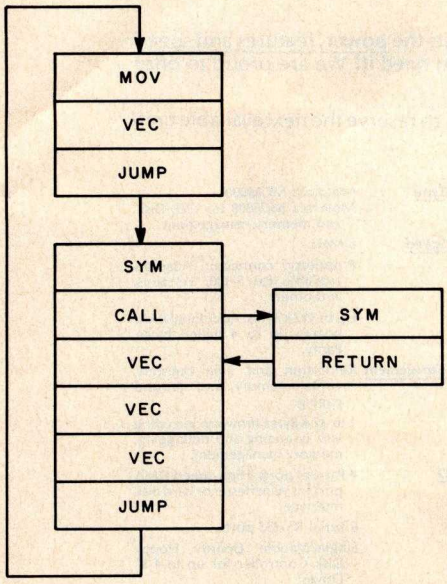


Figure 2: *The display list of primitive instructions performed by the display processor of a calligraphic (ie: vector) display. The loop is performed repeatedly by the processor to guide the display electronics. A new or modified display is produced by altering the display list.*

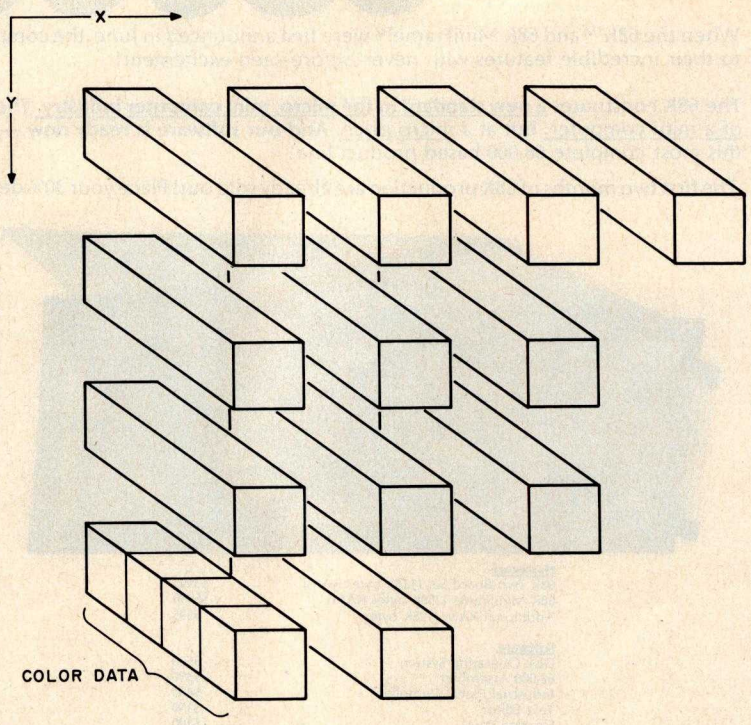


Figure 3: *A color raster-scan frame buffer. Each pixel (ie: picture element) on the screen is represented by a unique set of X and Y coordinates. Every coordinate is associated with some amount of color information (in this case, 4 bits). This data may be used to specify an address in a color-look-up table such as figure 4.*

vertical and near-horizontal lines. Any number of vectors, up to and including a full CRT screen, can be displayed without flicker.

Color raster-scan displays produce their images by exciting triads of dots or rectangles at each pixel. Each triad generally consists of one red, one blue, and one green element. Different colors (in excess of 2^{16}) can be produced by exciting each element at different levels of intensity.

Clearly, the use of each type of display is associated with certain advantages and disadvantages, as summarized in table 1.

Controlling a Calligraphic Display

As mentioned previously, a calligraphic display draws vectors based upon endpoint information. Even the most complex images can be created as a collection of vectors. Because of the short persistence of the CRT phosphors required for a fast calligraphic display, once a vector is drawn, it will disappear very quickly, typically in just a few milliseconds. Thus, the entire display must be continuously refreshed to avoid flicker and a loss of portions of the image. Refresh rates vary with the intensity of the display, but the image must be refreshed at least 30 times per second.

These requirements give rise to a structure called a *display list*. As figure 2 indicates, a display list is simply a collection of primitive instructions for the display processor. The display processor repeatedly scans this list to send vector-drawing information to the display electronics. To modify a display, Processor 2 (of figure 1) simply points the display processor to a new display list, or inserts or deletes a portion of the existing list. Generally, a display list is stored external to the display processor in the host-processor memory and is addressed via DMA (direct memory access).

Numerous instruction sets have been devised for calligraphic-display processors. Since displays at this primitive level are very difficult to control, the trend is toward higher-level graphics languages. However, all primitive instruction sets must contain certain basic features, including primitives to move the beam, draw a line, draw a character, call a subroutine, and change colors or intensity.


Controlling a Raster-Scan Display

Unlike calligraphic displays, raster-scan displays generally employ what is known as a frame buffer. The frame buffer is essentially a block of memory that maintains a one-to-one correspondence with the set of pixels. In other words, there exists one memory location for every pixel. A pixel can be specified in one or more bits, as figure 3 indicates. Thus, color information for a pixel is stored at each memory location. In color raster-scan displays, this memory location does not necessarily hold physical color information, but often supplies a pointer to a color-look-up table, as figure 4 indicates. Thus, for example, a pixel may be specified by 4 bits, but the color information may be translated to any sixteen of a possible 2^{16} colors. This technique allows the display of many different colors with a conservation of memory. The techniques of *contrast stretching* and *pseudocoloring* can be easily achieved with a color-look-up table.

A raster-scan display does require a large amount of memory to implement the frame buffer. For example, a display with a resolution of 512 by

Circle 40 on inquiry card.

Do more than ever before- spend less than you planned

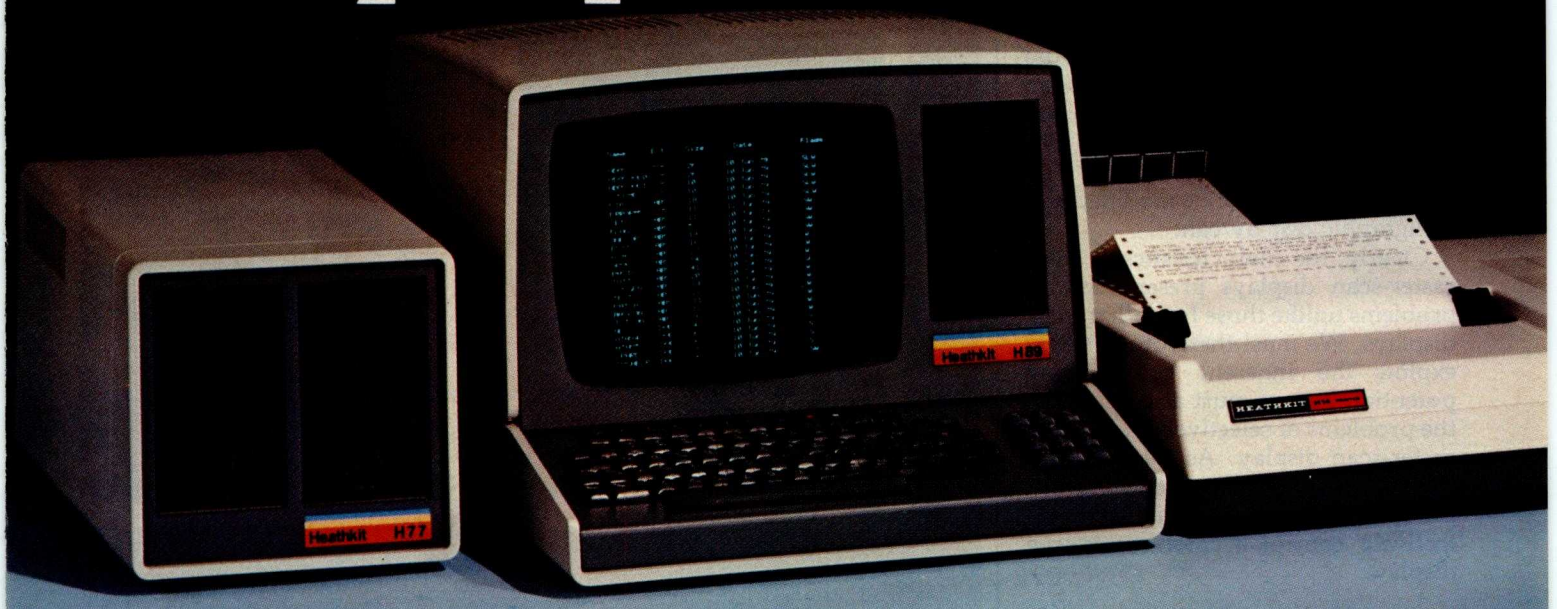

Heath makes the All-In-One Computer more versatile

Many satisfied customers know Heath takes the risk out of buying a balanced computer system. With the Heathkit All-In-One Computer, you get 16K Random Access Memory (expandable to 48K), keyboard, video terminal and floppy disk system – together in one self-contained, compact unit – for up to hundreds of dollars less than comparable systems.

Heath now makes the All-In-One Computer more versatile than ever! The new Heathkit H77 Floppy Disk System gives the All-In-One even more data storage and recall capacity. Combined, the All- In-One and H77 Floppy Disk give you up to 300K bytes of on-line data storage – enough to hold entire files. You can mount operating system and program disks at the same time, to make computing even faster.

You can run programs written in MICROSOFT™ BASIC™ and Assembly Languages, and all current software written for the popular Heathkit H8 Computer.

Heath User's Group (HUG) will share with you a library of over 500 programs to make your computer serve you in ways you never imagined.

There's no better way to learn about computer systems – and save money – than by building one yourself. Concise, easy-to-follow Heathkit assembly manuals show you the way, from start to finish. And a nationwide network of service centers protects your computer investment.

Join the Heathkit computer family today – and pocket the savings!

For complete details on Heathkit computer systems, as well as nearly 400 other electronic kits for your home, work or pleasure, send today for your free, value-packed Heathkit catalog. Or pick up your copy at the nearest Heathkit Electronic Center.

Heathkit®

SEND FOR FREE CATALOG

Write to: HEATH COMPANY,
DEPARTMENT 334-714,
BENTON HARBOR, MI 49022



VISIT YOUR HEATHKIT STORE



In the U.S. and Canada, visit your nearby Heathkit Electronic Center where Heathkit products are also displayed, sold and serviced. See the white pages of your phone book. In the U.S., Heathkit Electronic Centers are units of Veritechnology Electronics Corporation.

CP-184

512 by 8 requires 256 K bytes of memory. This drawback is one of the primary reasons that raster-scan devices have only recently become cost-effective.

Using a frame buffer, an image is drawn by inserting color information into the memory location corresponding to the appropriate pixel. This architecture has the feature of producing flicker-free images; however, to draw vectors the display processor must calculate every point along the vector. Scan-line-conversion algorithms that calculate the points of a vector (given the endpoints) exist, but such algorithms are slow compared to analog techniques used in calligraphic displays. Once an image is written into the frame buffer, it will be continuously displayed. Refresh is not required by the host, but the image cannot be modified as a calligraphic display can.

Clearly, the characteristics of color raster-scan displays present control problems unlike those for calligraphic displays. We must therefore not only exploit the inherent color-display potential, but we must also deal with the problems of selectively updating a raster-scan display. As the next section indicates, we can adapt calligraphic control techniques to effectively control a color raster-scan display.

Primitives for a Color Raster-Scan Display

To develop an instruction set for a color-graphics display processor, we must first establish our requirements. We assume as a minimum that these primitive instructions will be executed by an intelligent display processor having both a single-frame buffer and a color-look-up table. Therefore, we require that:


- The set of graphics primitives must permit the construction of any image within the physical limitations of the raster-scan display. The set doesn't need to be minimal: efficiency is a more important characteristic.
- The graphics primitives must be implementation-independent. The primitives must be applicable to any resolution and not be constrained by word size or any similar characteristic of the target processor.
- The graphics primitives must be

Circle 41 on inquiry card. →


SYBEX has the keys to BASIC

Have more fun . . .
Learn more BASIC

Hands-on BASIC!

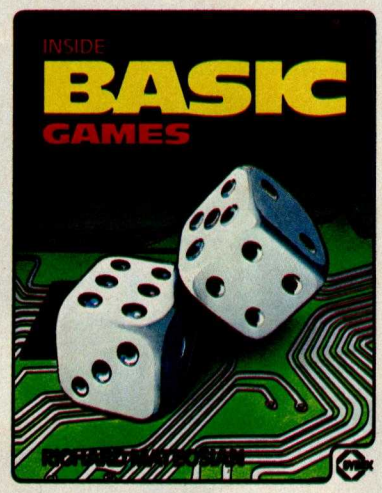

INSIDE BASIC GAMES
by Richard Mateosian
300 pp 100 illustr. Ref B245
7" x 9" ISBN 0-89588-055-5 $13.95
Describes BASIC programming techniques within the framework of real games. Blackjack and craps, math games and others are presented and analyzed in detail, teaching the reader to design effective programs as well as to play the games. An effective and enjoyable way for anyone with an elementary knowledge of BASIC to learn to design and program algorithms. The programs are written in MICROSOFT BASIC and can run on a PET/CBM, APPLE II or TRS-80 among others.

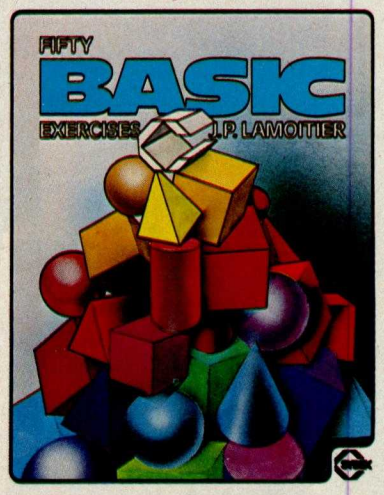


FIFTY BASIC EXERCISES
by J. P. Lamoitier
300 pp 140 illustr. Ref B250
7" x 9" ISBN 0-89588-056-3 $12.95
The BASIC book with style. This is the book for the educated reader, designed to teach BASIC through actual practice. Each of fifty graduated exercises is explained in full detail with flowcharts and program listings. Applications for mathematics, business, physics, accounting, games and statistics illuminate BASIC programming techniques and develop the reader's ability to consistently write attractive, effective programs. Includes a comparison and evaluation of useful BASIC extensions. All programs are written in MICROSOFT BASIC.

SYBEX the leader in computer education, enters a new era with the simultaneous publication of four new books on high level languages. These volumes employ the same effective methods developed by SYBEX to teach machine language programming in such best sellers as PROGRAMMING THE Z80 and PROGRAMMING THE 6502. From YOUR FIRST COMPUTER and the CP/M HANDBOOK to the new BASIC and PASCAL series, SYBEX is meeting the changing needs of the micro generation.

SYBEX—Anticipating your needs in computer education . . .

SYBEX unlocks PASCALS

A unique reference for all PASCALS

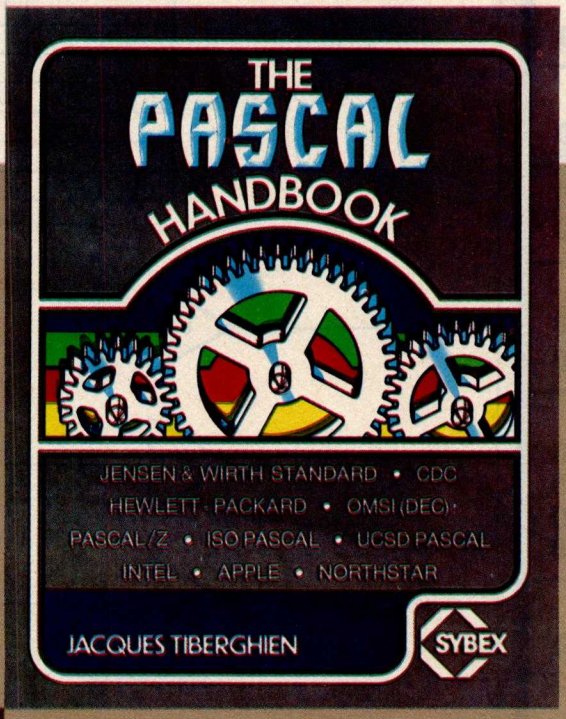


THE PASCAL HANDBOOK

by Jacques Tiberghien

300 pp 150 illustr. Ref 320
7" x 9" ISBN 0-89588-053-9 $14.95

A completely new approach to PASCAL. Every PASCAL symbol, reserved word, identifier and operation is described in alphabetical order. Each entry includes definition, syntactic diagram and semantic description, implementation, variations and program examples. Easy to use, comprehensive and concise, this unique handbook is indispensable to all PASCAL users. Covers most versions of PASCAL including Jensen and Wirth (Standard and CDC Version), H-P 1000, OMSI (DEC), PASCAL/Z, ISO and UCSD PASCAL.

Finally a PASCAL book for everyone

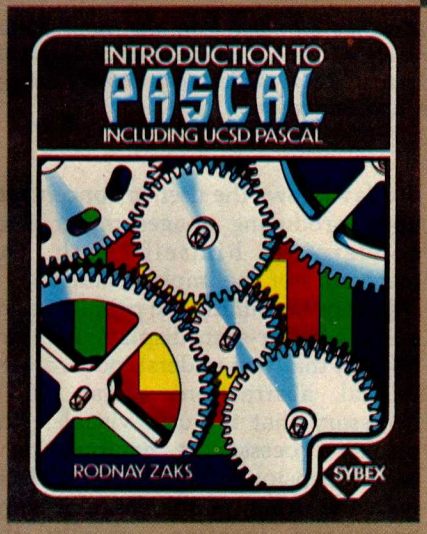

INTRODUCTION TO PASCAL (INCLUDING UCSD PASCAL)

by Rodnay Zaks

320 pp 100 illustr. Ref P310
7" x 9" ISBN 0-89588-050-4 $12.95

A simple, step-by-step guide to the elegant language of PASCAL. The logical format, clear explanations of each concept, symbol and operation, and the progressive exercises at the end of each chapter will have everyone—beginners, students and professionals—writing effective programs in a short time. This first volume in the SYBEX PASCAL series covers Standard PASCAL as well as UCSD PASCAL, the most widely used version on small computers.

SYBEX

MAIL TO: SYBEX
DEPT. B11
2344 SIXTH STREET
BERKELEY, CA 94710
PHONE ORDERS: 415/848-8233

PLEASE SEND ME

☐ FIFTY BASIC EXERCISES $12.95 ☐ INSIDE BASIC GAMES $13.95
☐ INTRODUCTION TO PASCAL $12.95 ☐ THE PASCAL HANDBOOK $14.95

NAME _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____
PLUS ☐ $1.50/book UPS or ☐ 75¢/book 4th class mail (CA add tax)
TOTAL AMT. ENCLOSED _____ OR CHARGE MY ☐ VISA ☐ MC ☐ AM. EX.
CARD # _____ EXP. DATE _____
SIGNATURE _____
☐ PLEASE SEND ME YOUR FREE CATALOG

NO FRILLS!
NO GIMMICKS!
JUST GREAT
DISCOUNTS
MAIL ORDER ONLY

ATARI 800
Personal Computer System $799.00

NORTHSTAR
Horizon II 32K 2349.00
Horizon II Quad 2799.00
Horizon II 64K 2999.00
Horizon Quad 64K 3399.00

TELEVIDEO
912 ..... 749.00
920 ..... 799.00

HAZELTINE
1420 ..... 795.00
1500 ..... 849.00
1510 ..... 1049.00
1520 ..... 1229.00

OKIDATA
Microline 80 ..... 699.00

SOROC Technology
IQ 120 ..... 699.00
IQ 140 ..... 999.00

CROMEMCO
System 3 ..... 5695.00
Z2H 7995.00

INTERTEC
Superbrain 32K 2495.00
Superbrain 64K 2795.00

DECwriter IV
LA34 ..... 979.00

TEXAS INSTRUMENT
810 Multi Copy Impact Printer 1499.00

We'll meet or beat any advertised prices!

Most items in stock for immediate delivery.
Factory sealed cartons. Full manufacturer's guarantee.

DATA DISCOUNT CENTER
Box 100 135-53 Northern Blvd., Flushing, N.Y. 11354
Visa • Master Charge • N.Y.S. residents add Sales Tax
Shipping F.O.B. N.Y.
Phone Orders Call 212-465-6609

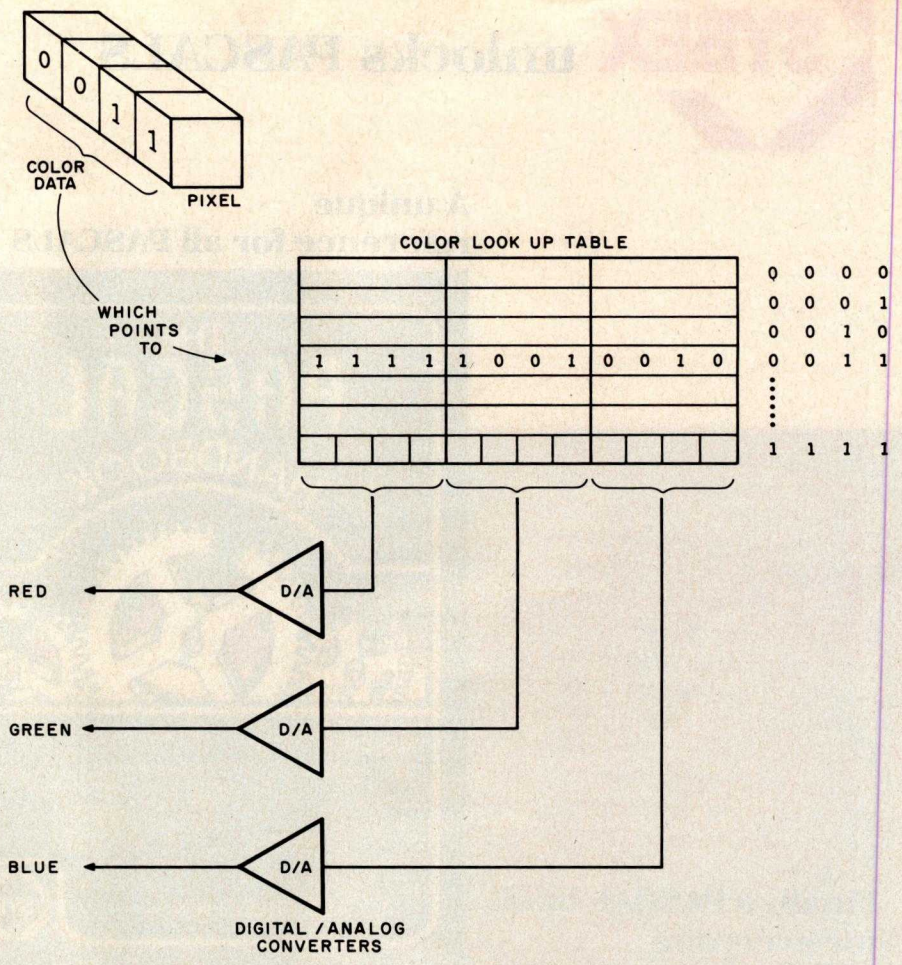


Figure 4: *Color-look-up table. Using this scheme, a 4-bit value from the frame buffer (shown in figure 3) can select one of sixteen predefined colors. In this example, each color is composed of various intensities of red, green, and blue. Other systems may specify colors by indicating values for intensity, hue, and saturation.*

adaptable to a display-list structure, since display lists are a well-established form of control for display processors and hence permit straightforward integration with generalized graphics-support software in the host processor.

Graphics Primitives


As explained previously, we know that raster-scan and calligraphic displays are architecturally different. However, our third requirement indicates that both classes of displays must at least appear identical to the user. Therefore, our graphics primitives become an abstraction for the control of a raster-scan display. We must design a set of primitives independent of the actual architecture of the display. Just as with the benefits of using a high-level programming language, the use of abstractions in controlling a graphics display allows the user to concentrate upon producing images rather than concerning himself with the mechanics of the implementation.

Before examining the primitives for a color raster-scan display, it is important that you understand two very critical abstractions. First, it is necessary that the user visualize the display processor as manipulating a two-dimensional Cartesian surface, with the origin of the space at some predefined location (usually the center, or lower left-hand corner) on the display surface. There may or may not be a direct mapping of pixel data in the display-processor memory to this surface: the actual implementation should be invisible to the user.

From the previous section, we know that the display processor doesn't need to be concerned with identification of objects that are displayed in this space, but rather we

Circle 42 on inquiry card. →

Pump Up Your TRS-80 with the ES/F Mass Storage System

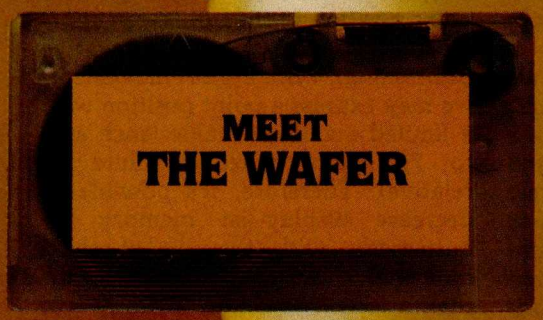

▲ Actual Size

Actual Thickness ▼



THESE FACTS SPEAK FOR THEMSELVES!

	CASSETTE	ES/F	MINI-DISK
SPEED (Seconds to load "Blackjack")	56	6 (5" wafer)	6½
CAPACITY (thousands of bytes)	38 (C-20)	64 (75" wafer)	59 (TRSDOS)
RELIABILITY (Designed for digital data?)	NO	YES	YES
SYSTEM COST (First unit plus interface)	$60	$250	$800
MEDIA COST (in quantities of ten)	$3.10 cassette	$3.00 wafer	$3.20 disk

Let's face it. Cassette players were not designed to store digital data and programs. That's why we designed a digital storage system using a continuous tape loop: the Exatron Stringy/Floppy (ES/F) and the Wafer. There's no expensive interface to buy—the ES/F comes ready to pump up your TRS-80.*

Once your TRS-80* is pumped up by our ES/F . . . you won't want to deflate it. We're so sure, that we offer an unconditional 30-day money-back guarantee and a one-year limited warranty. Over 2,000 TRS-80* owners have met the wafer . . . why don't you?

TRS-80*

EXATRON'S STRINGY/FLOPPY...

SPEED, CAPACITY AND RELIABILITY FOR ONLY $249.50



CALL OUR HOTLINE (800)-538-8559

IN CALIFORNIA, CALL (408)-737-7111

exatron, inc.
181 Commercial Street
Sunnyvale, Calif. 94086

*TRS-80 is a registered trademark of Tandy Corp.

Circle 43 on inquiry card.

JDR MICRODEVICES, INC.
is expanding its wholesale electronics operations to provide you with the best pricing avialable. JDR gives your the highest quality components along with great service that gets your order out the door in 24 hours.

MEMORY SPECIALS

2101	450ns	2.49	1702		4.95
2102	450ns	.99	2708		6.25
21L02	450ns	1.29	2716	5v	14.95
2112	450ns	2.99	2732		59.95
2114	450ns	4.99	Z-80		9.95
4116	200ns	5.99	8085A		12.95

4116 250ns 8/39.95

LS SERIES
LOOK AT THIS LS PRICING!

74LS00	.32	74LS85	1.23	74LS175	1.09
74LS02	.38	74LS86	.45	74LS191	1.31
74LS04	.35	74LS93	.71	74LS195	1.39
74LS08	.38	74LS95	1.11	74LS221	1.28
74LS10	.32	74LS109	.49	74LS240	1.89
74LS20	.35	74LS138	.79	74LS241	1.89
74LS30	.35	74LS139	.79	74LS244	1.79
74LS32	.39	74LS151	.79	74LS283	1.03
74LS38	.39	74LS153	.79	74LS298	1.24
74LS42	.79	74LS157	.79	74LS367	.99
74LS51	.35	74LS158	.82	74LS368	.99
74LS54	.35	74LS161	.99	74LS373	1.85
74LS73	.44	74LS163	.99	74LS374	1.81
74LS74	.48	74LS174	1.19	74LS377	1.48

OTHER SPECIALS

7400	10/1.99	95H90	7.95
7404	10/1.99	RED LED	10/1.00
7447	5/2.49	GREEN LED	6/1.00
7490	5/1.99	YELLOW LED	6/1.00
7493	5/1.99	2N3904	8/1.00
74151	3/1.99	2N3906	8/1.00
74153	3/1.99	2N3055	.79
74157	3/1.99	4MHZ Crystal	2.00
74161	5/3.99	5MHZ Crystal	2.00
74163	5/3.99	10MHZ Crystal	2.00

LINEAR IC'S

LM301-8	.34	LM555-8	.39
LM310	.64	LM556	.69
LM3118	.64	LM565	.99
LM318-8	1.49	LM567	1.29
LM319	1.29	LM741-8	.29
LM324	.59	LM747	.79
LM377	2.29	LM1458-8	.69
LM380	1.29	LM1889	2.49

REGULATORS

7805T	.89	7905T	.99
7812T	.89	7912T	.99
7815T	.99	7905K	1.29

DIP SWITCHES

4 position	.99
5 position	1.02
6 position	1.06
7 position	1.09
8 position	1.14

IC SOCKETS

14 pin	10/1.49
16 pin	10/1.69
24 pin	4/1.00

IMSAI S-100 edge connector solder tail gold 2.49

MA1012A
CLOCK MODULE
Complete alarm clock module with special transformer and spec sheets included. Just add switches. 8.99 3/24

TERMS: Include $2.00 for shipping. $10.00 minimum order. Send SASE for com plete catalog

JDR MICRODEVICES, INC.
1101 South Winchester Blvd.
San Jose, California 95128
408 247-4852

need only to be able to manipulate the pixel data that forms these objects.

The second abstaction which we must develop concerns *graphics-display registers*. These registers are defined in the display processor and may be addressed by the user to set up global image parameters, such as current vector type, or to provide immediate processor-status information, such as the current X and Y position. Clearly, these registers may be implemented in diverse portions of the display hardware. Concerning the second requirement, it is important that the user sees these registers as an easily addressable set that may be referenced by the host processor. As we shall see, the use of graphics-display registers helps reduce the scope of some of the graphics primitives that are necessary to control a color raster-scan display.

It is evident, as with any graphics display, that the minimum set of instructions we need includes only a point-positioning and a vector-drawing primitive. But clearly, this set is by no means efficient. Thus, I will present and defend the set of graphics primitives for a color raster-scan display which will be implemented in Micrograph. Next I will present the primitive instructions in their mnemonic form in order to maintain their implementation independence.

As with a calligraphic display, one of the most fundamental operations we perform is point positioning. Since a raster-scan display does not produce an image by beam movement, but rather by Z-axis modulation, we must abstract current X and Y coordinates, which may also be addressed as graphics-display registers. To increase the utility of a move primitive (ie: primitive instruction specifying a movement), we must include several options. To begin, both absolute and relative point positioning are necessary. The need for absolute positioning is obvious; relative positioning permits an entire display to be defined relative to a single point in the image, which is an essential feature if subroutines and instancing are to be supported.

Furthermore, remember that the elements of an image are often closely spaced: thus, we need options for long and short movement. With a long movement, we may express a point position in the full-screen coordinates (for either absolute or relative positioning). With a short movement, we may express a point position with a limited maximum value (such as 0 to 7, again either absolute or relative). Therefore, it's possible to decrease display-list memory requirements with the use of short movements, which take less storage than a long instruction. Finally, it is often necessary to simply plot a single point. To do so, we must include the option to illuminate or not. If we illuminate, we obviously must include a parameter for the color of the point. Mnemonically, our move primitive can be represented as:

MOV T,M,C,I,(±)X,(±)Y

where:

T = type (*S*hort or *L*ong movement)
M = mode (*A*bsolute or *R*elative positioning)
C = color
I = illuminate (*Y*es or *N*o)
X = X position or offset (with a sign on the relative mode)
Y = Y position or offset (with a sign on the relative mode)

For example, the primitive:

MOV S,R,4,Y,+3,−4

moves the current X,Y position by an offset of (3,−4) and illuminates that point in a color whose code is 4.

The next obvious primitive we need performs vector drawing. With the same justification as for the move primitive, we must permit the options of long and short vectors. We assume that the starting point of the vector is the current X,Y position, and the endpoints are determined by either absolute or relative positioning. Just as with a move primitive, we must also be able to specify the color of the vector. Finally, we must be able to define the current vector type, such as solid, dashed, or dotted vectors. Experience indicates that such line types are rarely used. Therefore, rather than specifying this parameter in the primitive itself, we assume that we have available a graphics-display register that defines the current line type. Mnemonically, our vector primitive

Chief Relief

For years many small business system buyers thought that in order to get "real" performance and enough storage to be a "real" business system they would have to sacrifice the family jewels.

But with the introduction of the Smoke Signal Chieftain series office computers a lot of people's minds have been changed.

Because we designed the highly reliable Chieftain small business system with the most innovative combination of performance and efficiency around.

At your fingertips there are 64,000 characters of random access memory and you can address anywhere from 740,000 characters to 2 million characters with Smoke Signals's new double density controller. For larger concerns, there's a 20M byte hard disk available.

At a time when other small computer manufacturers tell you "you're on your own", Smoke Signal offers an abundance of easy-to-use software programs such as order entry, inventory control, accounts receivable, invoice entry, payroll, word processing and much, much more. There's BASIC, COBOL and FORTRAN — even a multi-user BOS (Business Operating System) that allows for numerous users simultaneously.



Chieftain systems starting at under $200.00 per month display performance on par with systems costing twice to three times as much.

So call (213) 889-9340 for your nearest authorized Smoke Signal dealer — he'll be glad to demonstrate the Chieftain's high reliability and ease of operation.

For dealers only, circle 45
All other inquiries, circle 44

SMOKE SIGNAL BROADCASTING

31336 Via Colinas, Westlake Village, California 91361, (213) 889-9340



can be represented as:

VEC T,M,C,(±)X,(±)Y

where:

T = type (*S*hort or *L*ong movement)
M = mode (*R*elative or *A*bsolute endpoints)
C = color
X = X position or offset (with a sign in the relative mode)
Y = Y position or offset (with a sign in the relative mode)

For example, the primitive:

VEC L,A,15,255,180

draws a vector (with the color coded 15) from the current X,Y position to the pixel (255,180).

We must have an instruction that allows us to call a subroutine. Such a primitive is essential to support object instancing. Furthermore, since we assume the existence of an intelligent target display processor, we must expand our primitive to permit a call to a display-processor subroutine. Such an option allows the user to execute his own predefined routines, which can possibly decrease the image-generation time and reduce some of the processing burden from the host for often-used routines. Clearly, this option is not essential, but it does allow the user to exploit the full capabilities of the display processor. Mnemonically, our call primitive (ie: primitive instruction to call a subroutine) can be represented as:

CALL T,N

where:

T = type of subroutine (*P*rocessor or *G*raphics)
N = name or number of subroutine

For example, the primitive:

CALL G7

calls the grapics subroutine number 7.

Along with the call primitive, we obviously must have a primitive which allows us to return from a subroutine. Our return primitive instruction can be represented as:

RET


Text is often an element of a display and therefore warrants its own primitive. It is important to realize that text usually occurs as a string of symbols rather than a single symbol. Therefore, we must include an option to display a number of contiguous symbols. Furthermore, in terms of the symbols themselves, we may wish to use either a standard alphanumeric font or a user-defined font. Therefore, we assume the availability of a programmable symbol generator. As will be explained, the user may define his own set of symbols and then display a string of symbols by using the symbol primitive, passing it the codes for the appropriate symbols. Mnemonically, our symbol primitive can be represented as:

SYM N,S_0..S_{n-1}

where:


N = number of symbols in the string
S_i = symbol code

ECT™




Building Blocks for Microcomputer Systems, Dedicated Controllers and Test Equipment.

R²I/O S-100 ROM, RAM & I/O BOARD

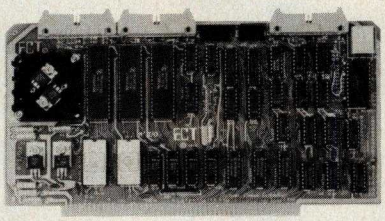

ECT's R²I/O is an S-100 Bus I/O Board with 3 Serial I/O Ports (UART's), 1 Parallel I/O Port, 4 Status Ports, 2K of ROM with the 8080 Apple Monitor Program and 2K of Static RAM.

$295.00



RM-10 S-100 RACK MOUNT CARD CAGE

ECT's RM-10 is a rack mount 10 slot Card Cage with Power Supply, consisting of an ECT-100 rack mount Card Cage (19″W x 12.25″H x 8″D), the MB-10 Mother Board (with ground plane and termination) all 10 connectors and guides and the PS-15A Power Supply (15A @ 8V, 1.5A @ ± 16V).

$295.00

Specializing in Quality Microcomputer Hardware
Industrial • Educational • Small Business • Personal
Card Cages, Power Supplies, Mainframes, CPU's, Memory, I/O, OEM Variations

ECT™ **ELECTRONIC CONTROL TECHNOLOGY** (201) 686-8080
763 Ramsey Ave., Hillside, NJ 07205

Circle 46 on inquiry card.

Circle 47 on inquiry card. →

NOW CLEANING YOUR OWN DISKETTE HEADS COULD SAVE YOU A $40 SERVICE CALL. AND A LOT MORE.


The recording heads on your diskette drives may be dirty—and that can cause you a lot of grief. There's the serviceman you have to call when the machine doesn't perform. (You know how much service calls cost these days!) There's machine down-time. Idle data entry clerks. All the other delays a cranky machine can cause.

And that service call might not even be necessary.

3M solves the problem in seconds—and leaves your heads "Computer Room Clean".

The Scotch® head-cleaning diskette kit lets you clean the read-write heads on your 8″ or 5¼″ diskette drives. In just 30 seconds, without any disassembly, mess or bother, the heads can be completely cleansed of dirt, dust, magnetic oxides—all the things that can get into your machines every day. And foul them up.

Just saturate the special white cleaning pad in its jacket with the cleaning solution. Then insert the jacket into the diskette drive and turn it on. Your machine does the rest. The




heads are microscopically cleaned without wear, without abrasion.

This 3M head-cleaning diskette kit has been evaluated and approved by major diskette drive manufacturers. It's the best possible way to clean your heads without service calls or machine teardowns.

At only $1 per cleaning—it's the best insurance you can get.

This fast-cleaning new Scotch kit comes with everything you need (including special fluid, applicator tip, cleaning diskettes) to handle up to 30 cleanings. That's only about a dollar a cleaning.

With the Scotch head-cleaning diskette kit, you could save yourself a lot more than just a service call. So try this remarkable kit today. For the name of



A Scotch cleaning diskette shown before use, and after 15 cleanings of recording heads.



the dealer nearest you, call toll free: 800-328-1300. (In Minnesota, call collect: 612-736-9625.) Ask for the Data Recording Products Division.



3M

For example, if we have defined a 128-character ASCII (American Standard Code for Information Interchange) set of symbols, the primitive:

SYM 5,68,80,77,80,83

displays the string "COLOR".

Also, as noted earlier, we may need to synchronize our display with the display frame rate, especially if we wish to perform animation with smooth movements. Therefore, we need a primitive that suspends display processing until the end of a frame or until after a certain number of frames. Mnemonically, our wait primitive can be represented as:

WAIT N

where:

N = number of frames to wait

For example, the primitive:

WAIT 7

suspends processing for seven frames.

Since we have assumed the existence of a color-look-up table to facilitate pseudocoloring and contrast-stretching, we must provide some method of controlling such a structure. There are two common methods for the organization of such tables. One method allows for the definition of a color by the proportions of red, green, and blue elements (the colors which physically make up a pixel). This method is easily performed in hardware, but it is not readily adaptable to common English color descriptions (such as hot pink or sea green). A preferred method, which we shall use, defines a color by its hue, intensity, and saturation. This classification refers to, respectively, the gradation of color (red, pink, purple), the brightness of the color, and the purity, or amount of black, in the color (dark red, fire-engine red).

We abstract the existence of a three-part table (which will actually be implemented in hardware) that is used as a color-look-up table. Since this table is user-alterable, we will refer to its parts as *color memories*. (They would usually be implemented as programmable-memory elements.) In order to generalize this primitive, we need to be able to update the entire table, one entire portion of the table (hue, intensity, or saturation), or all the parameters for a given color code. This table will allow selection of 2^n colors out of a 2^{i+h+s} color set where n is the pixel size in bits and i, h, and s are, respectively, the word size of the intensity, hue, and saturation color memory. For example, if $n = i = h = s = 4$, we can select one of sixteen colors out of a 2^{12} color set. Mnemonically, our load-color-memory primitive can be represented as:


LCRAM R,M,(A,)C_i

where:

R = reference (*I*ntensity, *H*ue, or *S*aturation color memory, or *A*ll)
M = mode (*S*ingle address or *A*ll addresses in table)
A = address (optional)
C = color data for the color memory

For example, the primitive:

LCRAM A,S,2,5,7,2

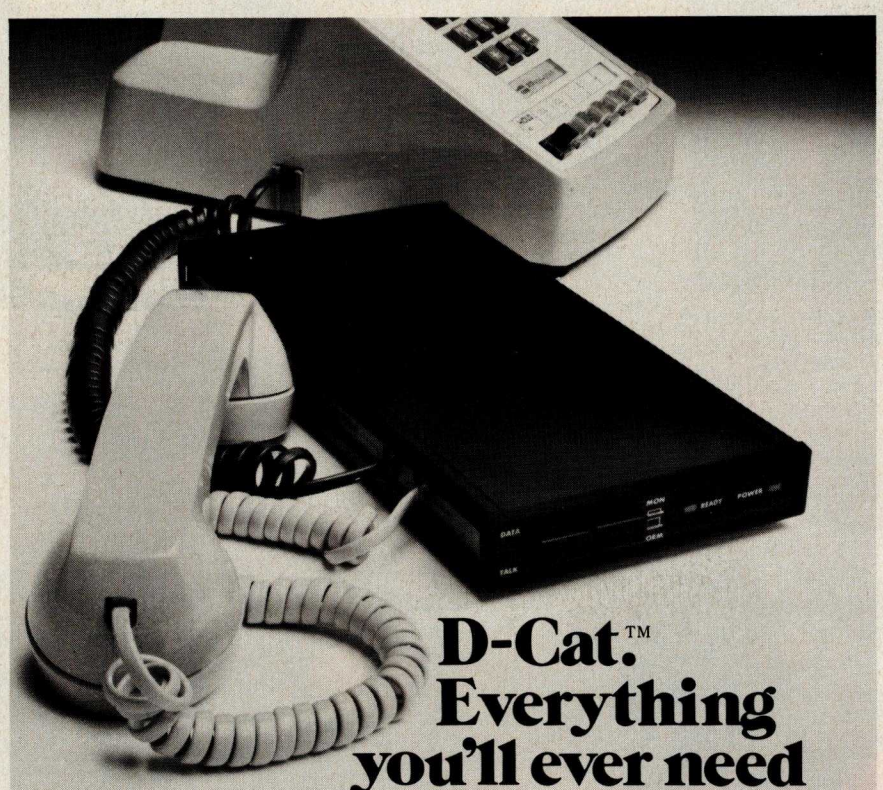

D-Cat.™ Everything you'll ever need in a basic, direct modem.

There's only one originate/answer modem that gives you the performance and reliability of a direct connect modem with the portability and price of an acoustic. Novation's new D-Cat.

D-Cat is the only direct modem that's FCC approved for handset jack connection with any modular phone. Use it at home or at work on a 50-pin, six line business phone. Talk to D-Cats, Cats, or any other Bell 103 compatible modem.

D-Cat also has all the features you want: full duplex capability, voice/data monitor, up to 20 dB performance improvement over acoustic, hold function, privacy button, self-test, and a remarkable price. Only $199.

But best of all, it's from Novation. The recognized world leader in personal communications.

D-Cat by Novation

Call for details:

(800) 423-5410

In California (213) 996-5060

Available at Avnet Electronics, Hamilton Electro, Hamilton Avnet, Kierulff Electronics, Byte Shops, Computerland, and your local computer store.


Novation, Inc., 18664 Oxnard Street, Tarzana, California 91356

DETACHABLE INSERT

Circle 48 on inquiry card.

PRIORITY ONE ELECTRONICS


ENGINEERING SELECTION GUIDE • FALL 1980

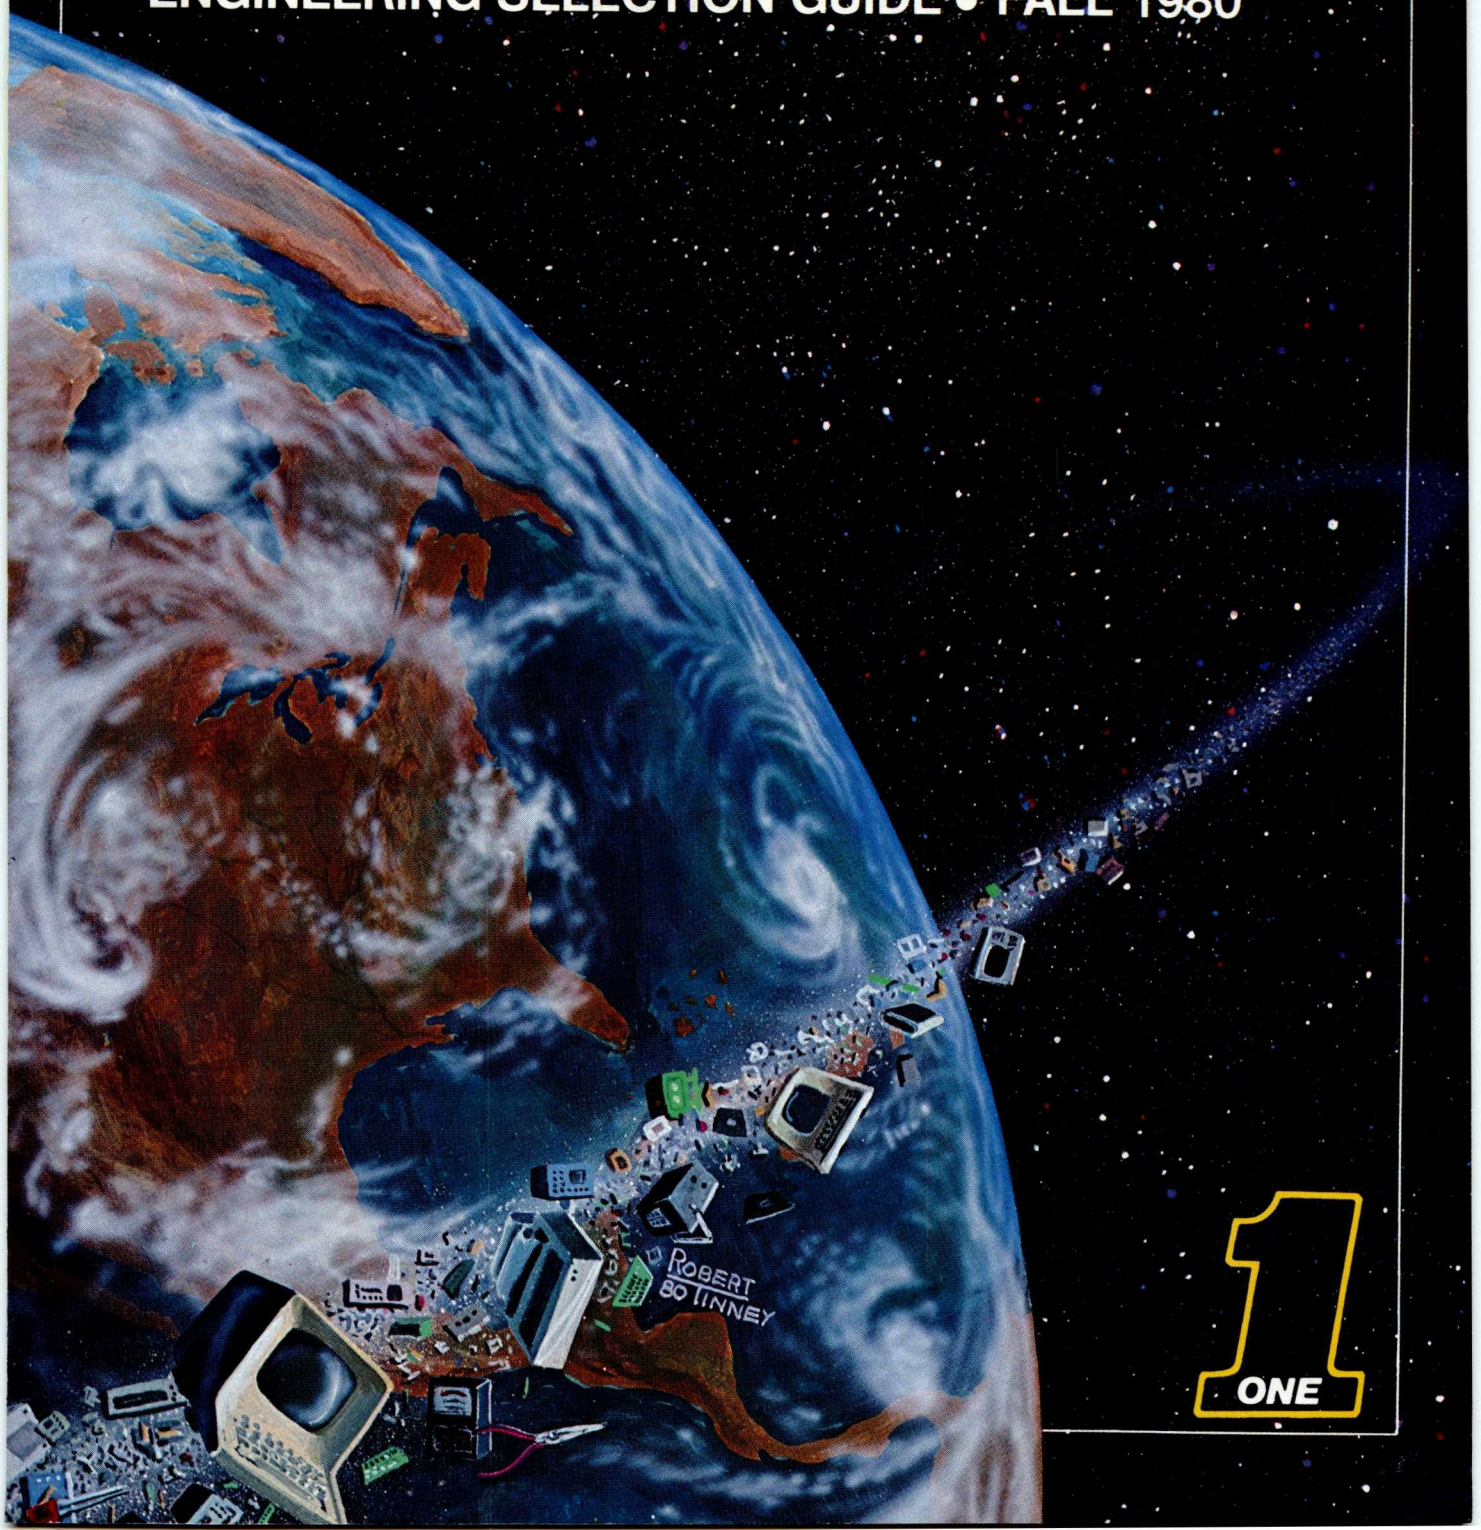

1 ONE

THE 8″ 9 TO 45 M BYTES FIXED RIGID DISK DRIVE FROM MICROPOLIS™



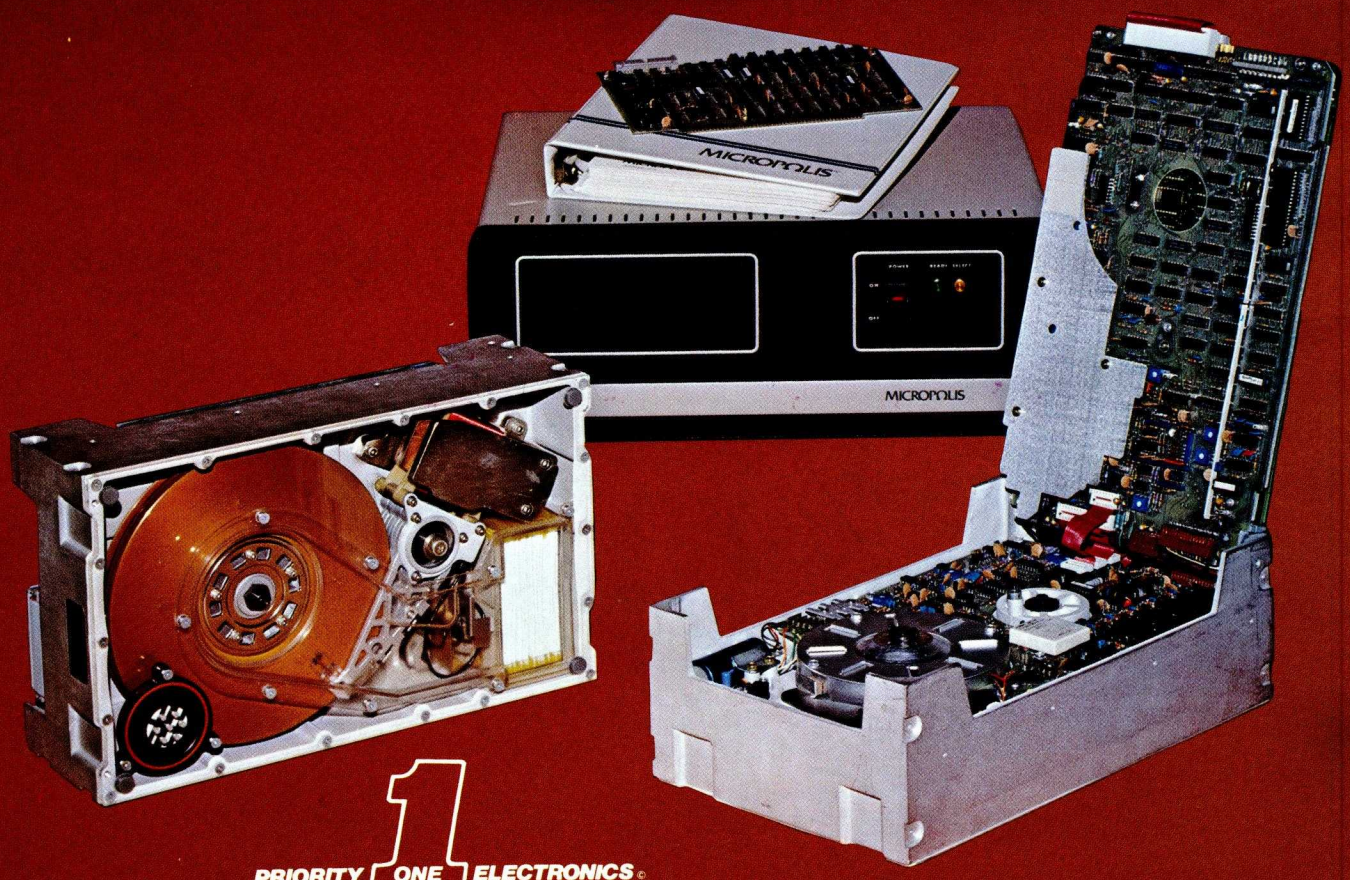

PRIORITY ONE ELECTRONICS©

FOR THE INSIDE TRACK, SEE PAGE 8

PRIORITY ONE ELECTRONICS

We thank Robert Tinney for accurately depicting, on our cover, ***PRIORITY ONE ELECTRONICS'*** *support for the electronic industry, worldwide and beyond. We will continue to service you with the finest state of the art components.* ***PRIORITY ONE ELECTRONICS*** *is proud to present our Fall, 1980 Engineering Selection Guide. Please* ***detach*** *the selection guide from your magazine and take a few moments to look over the wide variety of fine products that* ***PRIORITY ONE ELECTRONICS*** *has assembled for you.*

Anacom General Corp.	15	Fluke	44, 45	Probes	34, 38, 39, 46
Antronics	52	Frequency Counters	39, 47, 48	Prototyping Supplies	12, 24-33, 36-38
AP Products	17, 35-37	Function Generators	39, 48	Pulse Generators	38, 39
Apparat	16	Global Specialties Corp.	38, 39	QT Computer Systems	2, 3, 5, 12, 13
Apple Memory Expansion	16, 17, 19	Godbout	2-4, 12, 13	RAM ICs	16, 19
Apple Peripherals	17	GSC	52, 53	Resistors	22
B. & K. Precision	46, 48	Hard Disks	7-9	Ribbon Cable	24
Bishop Graphics	31-33	Hard Holes	18	Robinson Nugent	25
Books	17, 54	Hazeltine	14	RS232 Connectors & Cables	24
Breadboards	27-29, 32, 33	Head Cleaning Kits	18	RS232 Interfaces	3, 17
Breadboards, Solderless	37, 38	Heders	16, 24, 25, 35, 36	S100 Products	2-13, 16, 28, 32, 33
Bug Box System	40	Heat Guns	50	Sams Books	16, 54
C-Probe	41	Heat Shrinkale Tubing	51	Sanyo	14
Cables	15, 24, 34	HIckok	45, CV III	Semiconductors	19-22
California Computer Systems	2-4, 6, 12, 13, 16, 17, CV-IV	Hitachi	41-43	Serial Interfaces	3, 17
Caltronics	21, 24, 34	HUH? TRS-80 Products	16	Shugart	13
Capacitance Meters	41, 47, 48	Hunter Tools	49	Slit 'N' Wrap	30
Capacitators	23	I/O Boards	2, 3	Sockets	24-26, 36
Card Cages	13, 28, 30	ICs	19-21	Software	6, 7, 9, 16
Card Extenders	4, 12, 28	IC Storage	40	Soldering Equipment	50, 51
CAT Modem	15	IDC Connectors & Cables	24, 35	Static RAM Boards	4, 5
Centronics	15	International Instrumentation, Inc.	40, 41	Static RAM ICs	19
Clock/Calendar Boards	2, 17	ISOBAR	52	Super Ram	5
CMOS ICs	21	ISOTIP	51	Support Chips	19
Coleflex	51	Junction Boxes	52	Sullens	26
CompuPro	2-4, 12, 13	Just Wrap	27	Surgeonics	52
Connectors	24-26, 34, 35	Ledu Lamps	52	Switchboard	3
Continental Specialties	38, 39	Linear ICs	20	TEI	13
CPU Boards	2	Livermore Data Systems	15	Temperature Probes	45
CPU Chips	19	Logic Probes & Analyzers	27, 38, 39	Terminals CRT	14
CP/M	6	LS ICs	20	Terminals Wiring	27, 30
Crystals	23	3M Scotch	18	Terminator Boards	12
"D" Connectors	24	Mainframes	13, 28, 30	Test Clips	34, 35
D-Cat	15	Magnifier Lamps	52	Test Equipment	38, 39, 41-48, CV-III
Digital Pulser	38, 39	Media Accessories	18	Texas Instruments	25, 26
Diodes	22	Memory Boards	2, 4, 5	Textool	25
DIP Jumpers	36	Memory Chips	16, 19	Thinker Toys	3, 5, 6, 7, 12, 13
DIP Plugs	25	Meters	39, 40, 45, 47, 48, CV-III	Tools	12, 25, 27, 30, 34, 35, 49-52
DIP Switches	19	Micropolis	CV-II , 8-11, 16	Transformers	21
Discretes	22, 23	Microprocessor ICs	19	Transistors	22
Discus	6, 7	Modems	15	TRS-80 Memory Expansion	16, 19
Disk Cabinets	13	Monitors	14	TRS-80 Peripherals	16
Disk Drives	6-11, 13, 16	Morrow Designs	3, 5, 6, 7, 12, 13	TTL ICs	20
Disk Jockey	6	Motherboards	12, 28	UARTs	19
Diskette Storage & Care	18	Motorola	19-21	Ungar	50
Diskettes	18	Mullen	12	Vector Electronic Co.	4, 12, 28-30
Drafting Aids	31-33	NEWDOS80	16	Verbatim	18
Dynamic RAM Boards	2, 5	Non-Linnear Systems	46, 47	Video Boards	2
Dynamic RAMs	19	Novation	15	Video Displays	14
Econorams	2, 4, 5	Oscilloscopes	41-43, 46	Vista Computer Co.	16
Edsyn	51	Opto-Isolators	19	Winchester	24
Enclosures	13, 28, 30	Page Precut Wire	25	Winchester Technology	7, 8, 9
EPROM Boards	4	Pana Vise	49	Wire	25
EPROMs	19	Panel Meters	47	Wire Wrap Boards	27, 28, 29, 32
Expandable 1™	5	Photo Boards	28	Wire Wrap Headers	24, 36
Expandable+	5	Plugboards	27-29, 32, 33	Wire Wrap Sockets	25
E-Z-Bus	32, 33	Power Strips	52	Wire Wrap Tools	27, 29
E-Z-Circuit	31	Power Supplies	53	Z80 Microprocessor ICs	19
E-Z-Hook	34	Printers	15	ZIP DIP Sockets	25

© 1980 by ***PRIORITY 1 ELECTRONICS.*** All rights reserved, no part shall be reproduced without written permission from ***PRIORITY 1 ELECTRONICS.***

ORDER TOLL FREE (800) 423-5633

erators with crystal controlled frequencies (±0.1%)

QTCIOBB	Bare Board	$ 69.00
QTCIOK	Kit	$275.00
QTCIOA	A&T	$375.00

Specifications and prices subject to change without notice.

	LIST PRICE	OUR PRICE
THT-SW8K		$199.00
THT-SW8A	$259.00	$239.00

identically-addressed memory
- Uses FF Detect to disable output when empty locations addressed

	LIST PRICE	OUR PRICE
CCS2720	$250.00	$239.00

WE ACCEPT VISA, and MASTER-CHARGE

disabled at power on/reset.
Switch selection to disable board when PHANTOM is active.
—(2) using (4116-150ns) (6MHz) 200ns

PRIORITY ONE ELECTRONICS

GODBOUT GODBOUT GODBOUT

PRIORITY ONE ELECTRONICS

GODBOUT

MEET THE ECONORAM FAMILY... ALL ECONORAMS FROM COMPUKIT INCLUDE:


- Fully static memory used throughout to promote reliable operation and facilitate direct memory access. (DMA)

GODBOUT


Static S-100 Memory



California Computer Systems



PRIORITY ONE ELECTRONICS

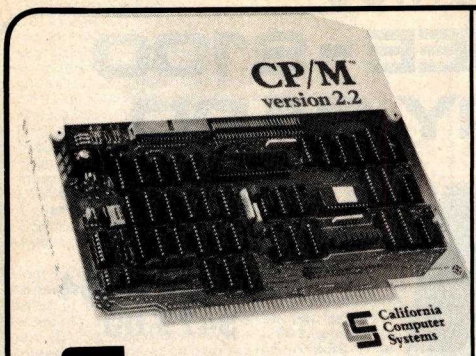

California Computer Systems

CCS2422 FLOPPY DISK CONTROLLER WITH CP/M VERSION 2.2

- Compatible with the IEEE proposed S-100 bus standards
- Controls any combination of 5¼ and 8" drives up to four
- Double-Sided and Side Select signals implemented for double-sided drives
- Reads and writes diskettes conforming to the IBM 3740 format standard for single-density diskettes and the IBM System 34 format standard for double-density diskette
- Z-80 compatible, ROM-resident bootstrap loader for loading CP/M Into system memory from diskette
- ROM-resident MOSS 2.2 Disk Monitor
- Plug-compatible with Shugart 800/850 and 400/450 drives
- Fast Seek for voice-coil drives hardware- or software-enabled
- Can be assigned to one of eight banks through bank byte/bank port system used by Cromemco and others
- Optional Auto Wait circuitry for wait on data or board status register when data register is not ready for data transfer
- PINT, NMI, or VIZ-V17 can be used to interrupt the CPU when the 2422 is ready for data transfer or a new command
- Write Precompensation circuitry for double-density diskettes
- Digital phase locked loop for read data separation
- LEDS to indicate ROM, Bank, and Board Select
- Address Decoding ROMs handle ROM and register addressing
- Optional Wait State for ROM
- Assembled & Tested

	List Price	Our Price
CCS2422	$400.00	**$375.00**


CALIFORNIA COMPUTER SYSTEMS SOFTWARE

CCS-2601 CP/M Version 2.2 Microcomputer Control Program **$150.00**
CCS-2610 MAC-CP/M Macro Assembler **$90.00**
CCS-2620 SID-CP/M Symbolic Instruction Debugger **$75.00**
CCS-2630 TEX-CP/M Text Formatter **$75.00**
CCS-2640 DESPOOL—CP/M Background Print Utility **$50.00**

All software comes with manuals & 8" diskette


CP/M, MAC, SID, TEX, and DESPOOL are registered-trademarks of Digital Research.

Thinker Toys™

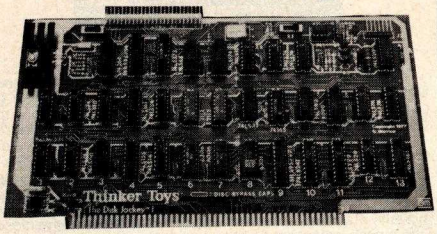

DISK JOCKEY I FLOPPY DISK CONTROLLER

Specifications
- S-100 compatible
- Plug-compatible with Shugart SA800/850 disk drives

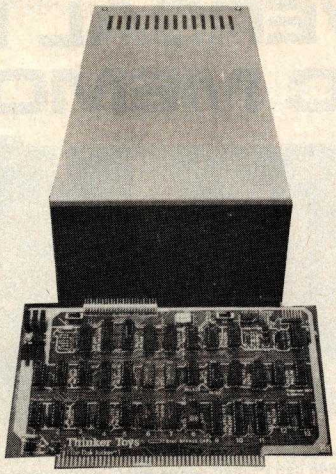

DISCUS 1 FULL-SIZE, SINGLE-DENSITY DISK MEMORY SYSTEM


The DISCUS I full-size, single-density disk memory system offers the opportunity to move your S-100 system into the large storage capability and high speed access of an 8" drive.

DISCUS I gives you 250,000 bytes per diskette with five times the access speed of a mini-floppy. Yet, the cost is only slightly higher.

DISCUS I full-size, single-density disk system is complete in every way—complete with all hardware, all software and completely assembled and tested.

Specifications:
Data Specifications and Formats
- 250,000 byte capacity per standard 8" floppy diskette
- Soft-sectored IBM-compatible format: 77 tracks/26 sectors per track/128 bytes per sector
- Includes Disk/ATE™ disk operating system with integral monitor, assembler and text editor & BASIC-V advanced virtual disk BASIC capable of addressing up to 1 megabyte
- Software customized for SOL and Exidy available
- Patches for CP/M* included
- Optional CP/M* Microsoft BASIC, and FORTRAN available.

	List Price	Our Price
THT-D1S Single Drive	$995.00	**$950.00**
THT-D1D Dual Drive	$1790.00	**$1595.00**




DISK JOCKEY 2D FLOPPY DISK CONTROLLER

Specifications:
- Plug compatible with Shugart, Remex and Siemens single- or double-sided drives
- Double/single-density capability utilizing MFM and FM data formats
- Western Digital 1791 LSI floppy disk controller chip
- Uses 2K of S-100 address space:
  —1K PROM with built-in disk drive and I/O utility subroutines incorporating memory mapped I/O
  —1K 2114-3L 300 ns access time RAM for disk data buffering and general purpose use
- Starting address of memory space is 340:000 (E000 hex) for compatibility with other popular ROM based systems
- Phase-locked data separator and crystal controlled disk data write precompensation capability to insure the highest standards of data integrity in double density mode
- Compatible with all 2 MHz and 4 MHz systems which conform with the proposed IEEE standards for the S-100 bus
- 1602 UART with crystal-controlled baud-rate generator
- Sixteen switch selectable baud rates from 50 to 19,200 bits/second
- TTY current loop and industry standard RS232C serial interface
- Power-on jump circuitry for automatic bootstrap loading from the disk drive
- Power supply requirements: +8v @ 1200 ma; +16v @ 150 ma; —16v @ 70 ma
- ROM utility subroutines:

Bootstrap load	Seek
Terminal input	Set sector
Terminal output	Set DMA address
Horne	Disk read
Disk write	DMA status
Select drive	Disk status
Terminal panic detect	Disk error
Terminal status	Switch density
Discus 2D	Discus 2 + 2
Double density	Double density
Single sided	Double sided

Thinker Toys™



DISCUS/2D™ DOUBLE DENSITY DISK SYSTEM

Why not go all the way to the professional/industrial standard of 600K byte/side disk memory with your S-100 system? The new DISCUS/2D™ full-size, double-density floppy disk system is actually less expensive than many mini-floppy systems.

And Thinker Toys™ hasn't just made full-size, double-density disk memory affordable...we've made it more functional.

Thinker Toys™ has developed BASIC-V,™ a virtual disk BASIC that lets you address all 600K bytes (expandable to 1 megabyte) as if were main memory. The data format is soft-sectored and compatible with IBM's new System 34. And DISCUS/2D™ accepts both single-density and double-density disks for complete flexibility in data storage.

And DISCUS/2D™ is even more attractive because it's priced and delivered as a truly complete system. It's complete with all hardware. It's complete with all necessary software. And it's completely assembled, tested and warranted.

Specifications:
- CP/M V2.2 standard
- Plug compatible with Shugart, Remex and Siemens single- or double-sided drives
- Double/single-density capability utilizing MFM and FM data formats
- Western Digital 1791 LSI floppy disk controller chip
- Uses 2K of S-100 address space:
  —1K PROM with built-in disk drive and I/O utility subroutines incorporating memory mapped I/O
  —1K 2114-3L 300 ns access time RAM for disk data offering and general purpose use
- Starting address of memory space is 340:000 (E000 hex) for compatibility with other popular ROM based systems
- Phase-locked data separator and crystal controlled disk data write precompensation capability to insure the highest standards of data integrity in double density mode.
- Compatible with all 2 MHz and 4 MHz systems which conform with the proposed IEEE standard for the S-100 bus
- 1602 UART with crystal-controlled baud-rate generator
- Sixteen switch selectable baud rates from 50 to 19,200 bits/second
- TTY current loop and industry standard RS232C serial interface
- Power-on jump circuitry for automatic bootstrap loading from the disk drive
- Power supply requirements: + 8V @ 1200 ma; + 16V @ 150 ma; —16V @ 70 ma.
- ROM utility subroutines:

Bootstrap load	Seek
Terminal input	Set sector
Terminal output	Set DMA address
Horne	Disk read
Disk write	DMA status
Select drive	Disk status
Terminal panic detect	Disk error
Terminal status	Switch density
Discus 2D	Discus 2 + 2
Double density	Double density
Single sided	Double sided

	List Price	Our Price
THT-D2DS Single Drive	$1199.00	**$1098.00**
THT-D2DD Double Drive	$1994.00	**$1798.00**

	List Price	Our Price
THT-D22S Single Drive	$1545.00	**$1395.00**
THT-D22D Double Drive	$2740.00	**$2450.00**

THINKER TOYS SOFTWARE

DRIVE A HARD BARGAIN!

26 MEGABYTES

THINKER TOYS™

Suddenly, S-100 microcomputer systems can easily handle 100 million bytes. Because Morrow Designs™ now offers the first 26 megabyte hard disk memory for S-100 systems–the DISCUS M26™ Hard Disk System.

It has 26 megabytes of useable memory (29 megabytes unformatted). And it's expandable to 104 megabytes.

The DISCUS M26™ system is delivered complete–a 26 megabyte hard disk drive, controller, cables and operating system–for just $4995. Up to three additional drives can be added, $4495 apiece.

The DISCUS M26™ system features the Shugart SA4008 Winchester-type sealed media hard disk drive, in a handsome metal cabinet with fan and power supply.

The single-board S-100 controller incorporates intelligence to supervise all data transfers, communicating with the CPU via three I/O ports (command, status, and data). The controller has the ability to generate interrupts at the completion of each command to increase system throughput. There is a 512 byte sector buffer on-board. And each sector can be individually write-protected for data base security.

The operating system furnished with DISCUS M26™ systems is the widely accepted CP/M® 2.0



LIST PRICE
$4995.00
OUR PRICE

$4495.00

GENERAL SYSTEM INFORMATION

The DISCUS M26 is supplied with the CP/M 2 Operating System prerecorded on the disk. Both low level drivers and bootstrap software are furnished in the documentation and on the disk itself. The drivers are assembled to run at F400 hex and assume that the controller has I/O addresses 50, 51, 52 and 53 hex. For recovery from a catastrophic software crash, Morrow Designs can supply a floppy diskette which reformats the disk and reinstalls copies of the operating system.

The controller can run up to four hard disks for a total of 104 megabytes of on-line storage. It is implemented in forty-seven MSI and SSI TTL integrated circuits. A DIP switch is provided for setting the starting I/O address of the controller. The four addresses are:
0-Control and data status
1-Controller command register
2-Drive select and control register
3-Data In and Out

The lowest address set into the switch must be divisible by four. Through the "Drive select and control register," the controller can select any of the four drives and up to sixteen heads within a drive. Also accessible through this register are the step and direction command lines which are used to move the eight read/write heads from one track to another.

Data transfers are handled through an on-board finite state machine fashioned out of standard TTL and a medium-sized PROM (64 x 8). The commands are:
- write a sector header
- read a sector header
- read a sector of data
- write a sector of data
- reset the internal data buffer pointer to the beginning of the data buffer
- reset the internal data buffer pointer to the beginning of the sector header buffer

The CPU transfers data to the controller by first resetting the internal data buffer pointer to the beginning of either of the two data areas. Next, it fetches data from the appropriate location in memory and performs successive outputs to the data port of the controller. Each reference to the data port automatically increments the pointer to the buffer.

Transferring data from the controller is accomplished in a similar fashion. The pointer is positioned and then the CPU does successive inputs and finally stores the data in an appropriate place in memory. The data buffer is stable between operations and can be referred to again. The buffer must NOT be touched during disk data transfer operations.

Provision is made for the interconnection of controller interrupts to any of the S-100 Bus vectored or unvectored interrupts.


SPECIFICATIONS


Enclosure
Cabinet dimensions: 6⅞" high, 16⁵/₁₆" wide, 30½" long. Cabinet is both rack mountable or useable as table top model. (Available Fall 1980: rack slides and desk height rack.) Color: beige.

Power Supply (internal to cabinet)
+24 v @ 3.0 amps
+5 v @ 3.0 amps
−14 v @ 1.5 amps

Drive Power Requirements
115 v AC @ 3.0 amps, or
230 v AC @ 1.5 amps

Capacity (formatted): 26,476,544 bytes
Seek time (track to track): 1 ms; head settle time: 20 ms
202 cylinders
8 tracks per cylinder
32 sectors per track
512 bytes per sector

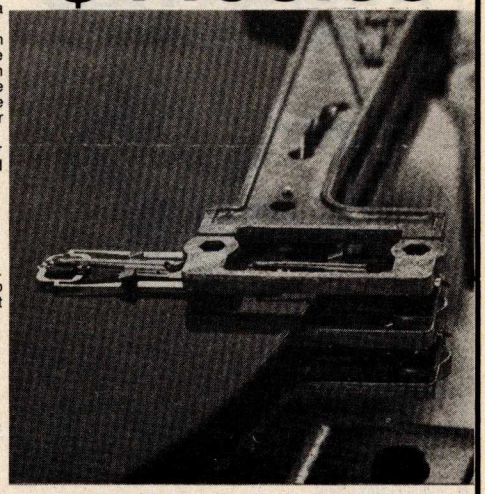

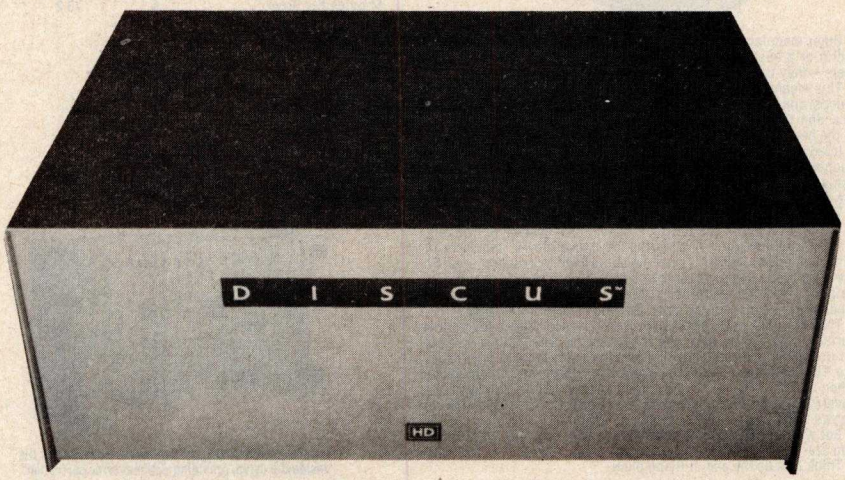

CP/M® SOFTWARE OPTIONS

For anyone currently running CP/M 2, we will provide a program that automatically integrates the DISCUS M26 into the operating system. This program will be provided on an IBM standard diskette, and it will leave existing terminal and disk I/O unchanged. Thus the M26 can be readily added to most S-100 systems.

For systems without CP/M 2, we offer CP/M in several configurations. The standard release provides disk I/O for the DISCUS M26 and the Disk Jockey, and terminal I/O for the Disk Jockey or Switchboard serial ports. Optionally, we provide terminal I/O for the SOL keyboard and monitor or for the EXIDY keyboard and monitor. Terminal I/O can also be left blank (jump-to-self) to allow custom patching.


Finally, for CROMEMCO users, we plan to offer a CP/M 2 expanded to full CDOS compatibility and interfaced to the M26 and to standard CROMEMCO floppys. This is sold and serviced by MICAH, 1250 Pine St., #102, Walnut Creek, CA 94596, (415) 933-2783. It will also be available directly from Morrow Designs.

	List Price	Our Price
THT-M26S Subsystem	$4995.00	**$4495.00**
THT-M26A Add-on hard disk drive	$4995.00	**$3995.00**
THT-M26HDC Hard disk controller		**$ 695.00**

Shipping Weight: THT-M26S&A 50 lbs.
THT-M26HDC 3 lbs.


PLEASE ORDER BY PART NUMBER

THE MICROPΩLIS MICRΩDISK™ WE DIDN'T JUST GIVE IT BETTER STORAGE CAPACITY. WE GAVE IT BETTER EVERYTHING.

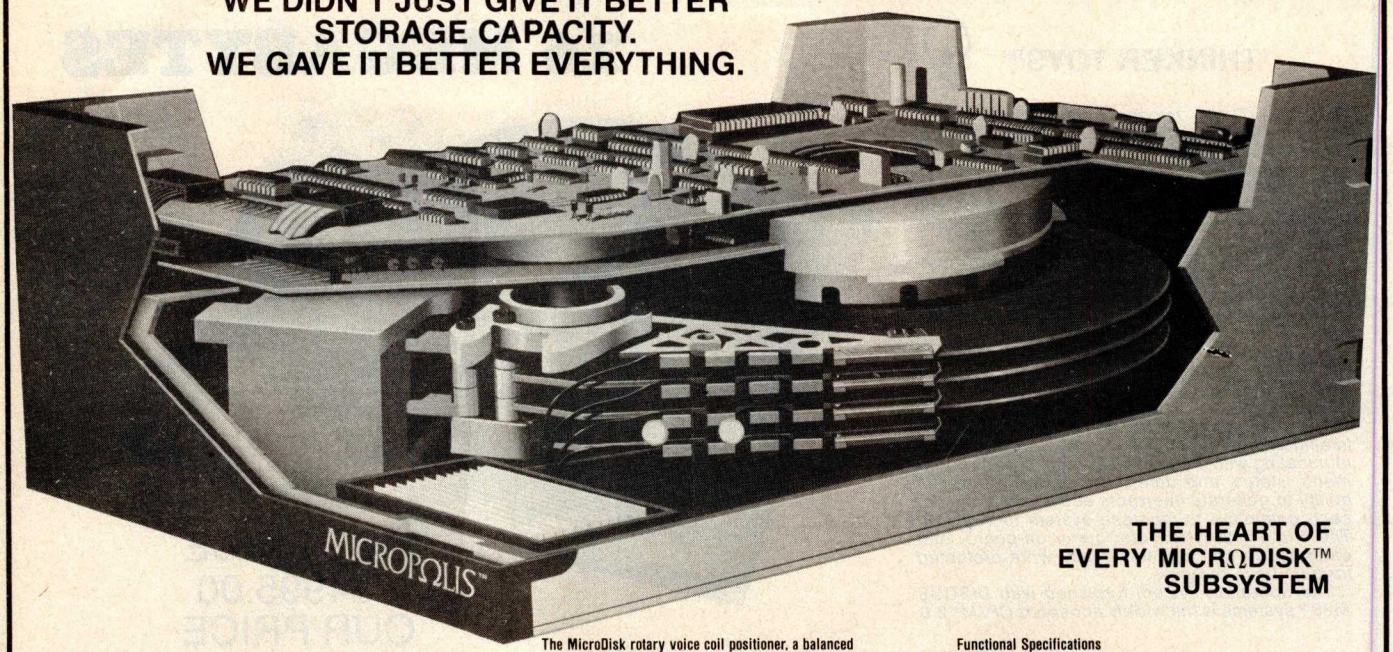

THE HEART OF EVERY MICRΩDISK™ SUBSYSTEM

The MicroDisk rotary voice coil positioner, a balanced swing arm mechanism supported on two pre-loaded bearings.



The MicroDisk rotary voice coil positioner. A truly balanced system.

In keeping with the Micropolis policy of not skimping on quality, we gave the MicroDisk a rotary voice coil positioner. It's a balanced swing arm mechanism supported on two pre-loaded bearings.

The voice coil is attached to the system on the opposite side of the bearings from the heads, and the whole mechanism is statically balanced.

The innovative Quartz-locked, direct-drive, brushless D.C. Micro-Motor, shown with braking mechanism.



Other manufacturers try and cut costs by using either a stepper motor or a linear voice coil. There's only one drawback to both of them—they can never be balanced.

This means that their drives are vulnerable to unexpected jolts, bumps, and shocks during operation. With an unbalanced positioner, a random elbow or push to the drive unit will cause small movements of the head relative to the disk.

Imagine your stereo turntable. What happens when someone nudges it while a record is playing? The unbalanced pick-up arm skips over your record. In a disk system even very small movements are serious during a write operation.

There's yet another disadvantage to using a stepper motor instead of a rotary voice coil. It's slower. For multi-user system applications it's unacceptably slow. And, during the "power-down" sequence, or in case of power failure, it can't move the head to a neutral area. So the head lands in your data area on the disk, and may destroy the data. Forever. The MicroDisk's rotary voice coil, however, always lands the head in a neutral area. So data is never threatened.

The MicroDisk has a Dedicated Servo Surface. This is the bottom surface of the bottom disk, and is not used for data. Rather, it's used for positioner information that allows the heads to know where they are. The positioner contains feedback that tells the heads continually when they're on track, so they won't ever write off track even in a severe vibration environment. With a stepper motor, the head never knows where it is—it's like driving in the dark.

But with the MicroDisk's rotary voice coil, you know just where you are.

Think of it as the end of flying blind.

Functional Specifications

Encoding Method	EPM
Platters	1, 2 or 3
Data Surfaces	1, 3 or 5
Data Heads	1, 3 or 5
Available Tracks	580

Environmental


Ambient Temp. Range	50-104°F (10-40°C)
Relative Humidity	10-80% non condensing

Power Requirements

110V 60Hz, 3.5A (max.)
220V 50Hz, 1.5A (max.)

Specifications subject to change without notice.

The Micropolis MicroDisk 8-inch drive (left), and Industry standard 8-inch floppy disk drive, shown side-by-side.




Capacity	1261-1	1262-1	1263-1
Model Nos.	1251-1	1252-1	1253-1
Unformatted Capacity M Bytes Per Drive	8.9	26.7	44.5
Formatted Capacity M Bytes Per Drive	6.1	18.2	31.1

Mechanical Dimensions

Height	7.00" (177.80 mm)
Width	19.00" (482.60 mm)
Depth	18.40" (467.30 mm)
Weight	45 lbs. (20.50 Kg)

Access Time


Track to Track	4 milliseconds
Average (1/3 stroke)	34 milliseconds
Settling	8 milliseconds
Average Latency	8.33 milliseconds
Transfer Rate	7.375 M Bits Sec.



The Micropolis Intelligent Controller, whose board fits inside the drive, providing optional error correction.

MICROPΩLIS™

MicroDisk's clean area, with lifetime filters, showing direction of general airflow in the system.



The MicroDisk's drive mechanics consist of a die cast deck whose lower half is devoted to the recording heads, platters, and voice coil motor components. This lower half is the closed circuit clean area, and air is circulated through it by disk rotation induced flow. The flow is directed through a 0.3 micron absolute filter. So there's never any reason to expose the MicroDisk's clean area to unsterile air.

Most other manufacturers violate the rules for sealed "clean" areas in their drives. By placing active components inside the clean area—components that would require unsealing the area to replace or repair faulty parts.

But we decided it didn't make any sense to offer a clean area that wouldn't stay clean.

So there are no active electronic parts in the MicroDisk's clean area. The electrical connection between this area's components and the electronics package is made via a PCB which seals the clean area from the rest of the casting. The single chip preamps are located in sockets accessible without violating the integrity of the clean area.

So you can depend on it not only to be clean, you can depend on it to work.

The Quartz-locked direct-drive motor. Another first from Micropolis.

In order to increase reliability and capacity of the MicroDisk's drive system, we added an element that no one else in the industry has: Quartz crystal speed control.

Rotational drive for the MicroDisk is provided by a Quartz-locked, direct-drive, brushless D.C. Micro-Motor™ only ¾" high. This innovative combination allows a very low profile, and lets three platters reside in an envelope only 4.62" high.

It also makes the design of the Micropolis (or your) controller very simple, and lets us put a full 5% more data on the drive itself by holding the rotation to an accuracy of 0.5%.

And the simplicity of the Quartz-locked MicroMotor gives the drive something else: a very long life.

The MicroDisk lets you put the brakes on.

We've included something on the MicroDisk that some other drive manufacturers curiously omit—a braking mechanism. They claim that a brake is unnecessary and superfluous. And no threat to your disk.

They're wrong.

Some manufacturers use the head to stop the disk from rotating when power is cut. This means that the head slows the disk by friction, letting the disk rotate many times before it stops.

That's why we gave the MicroDisk a brake. It extends the life of the disk by not allowing the head to act as the braking mechanism. That's longer disk life for you, and a higher MTBF in the critical clean area.

Quite frankly, it makes us wonder why people do it any other way.


THE MICROPΩLIS MICRΩDISK™ 8" RIGID DISK SUBSYSTEM WITH OSM. MULTI-USER, MULTI-TASKING AND INCREASED CAPACITY FOR YOUR S-100 MICRO-COMPUTER.

The Micropolis Microdisk is an 8" Winchester disk storage subsystem designed for an S-100 Bus minicomputer using an 8080, 8085, or Z-80 microprocessor with a clock frequency of 2-4 MHz. The subsystem, including the OSM software package, provides you with a true multi-user, multi-tasking system.

The Microdisk subsystem consists of the OSM multi-user multi-tasking, multi-access software package, full documentation. Intelligent Disk Adapter board, interface cable, and from one to eight Microdisk storage modules, depending on your needs.

The Microdisk subsystem offers upward expansion of existing program and data files previously created for Micropolis, Macrofloppy and Metafloppy subsystems.

The Microdisk delivers high capacity, file sizes up to 65,000 records in length, fast access, and excellent data reliability.

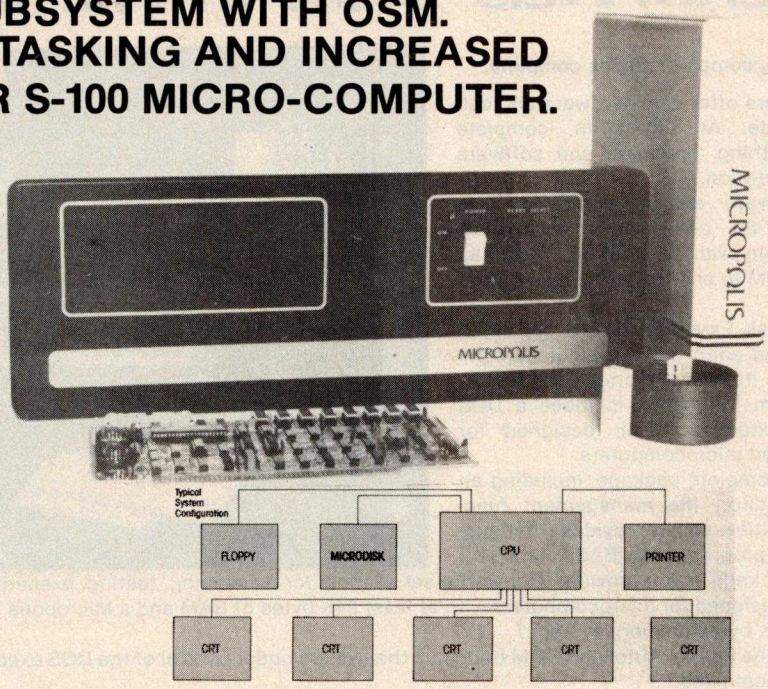

Micropolis OSM. Another first for Microdisk.

Micropolis OSM is a set of operating system modules which requires a Microdisk subsystem as the primary file device. It relies on the Intelligent Disk Adapter in the subsystem to perform the File Management for the Microdisk. I/O interface cards with appropriate interrupt capability are necessary to support multiple terminals. Bank switchable memory may be used in the host computer to expand memory capacity, although it is not required.

OSM uses techniques of processor control, I/O handling, memory, task and resource management to create a true multi-user environment. Using the OSM Executive, users at several terminals can invoke and interact with different application programs written in assembly language or BASIC. The system provides an assembler, a source text editor, and a Disk Extended BASIC Interpreter to support the development, execution, and maintenance of application programs. General system management is provided by Filecopy, Disk Archiving, and other utilities.

The main OSM module is loaded into the host computer memory by the Microdisk bootstrap process, and is permanently resident during system operation. The bootstrap process also loads the Microdisk File Management programs into the Intelligent Disk Adapter. Included in the resident module are programs for Interrupt Servicing, Processor Conrol, Physical Device Drivers, Logical Device Handlers, Memory Management, Task Management, the system Supervisor, the OSM Executive, and the DEBUG Executive.

Nonresident OSM Modules.

Some of the OSM modules are separate programs which are loaded from the disk when required, and run under the controls and management of the main OSM resident module. These include an 8080/8085 assembler, a source text editor, a FILECOPY utility, a Disk Archiving utility, and the Micropolis Disk Extended BASIC Interpreter.

OSM Disk Archiving Utility.

The Disk Archiving program is an optimized utility that can be used to back-up copy the contents of a Microdisk unit onto multiple floppy disk volumes.

OSM Memory Management.

The Microdisk Memory Manager controls the allocation of memory blocks to tasks, provides dynamic program demand allocation for assembly language programs, and specifiable partition sizes for user BASIC programs. Programs can also be allocated portions of memory from different bank switchable memory boards, if the address ranges do not overlap. For assembly language programs, the address ranges may be noncontiguous. (A BASIC program uses an address-contiguous memory area.)

OSM Executive.

The OSM Executive lets you control the normal operation of your computer system with dialogue through interactive terminals, and offers command dialogue access to the Supervisor facilities. Included in the OSM Executive are controls and commands to initiate a task, name and set the execution priority for a task, load a program as a task, suspend a program, resume a program, place a program in background execution mode, cancel a program, terminate a task, transfer a terminal to another task, view the system status, and view the logical device status.

Access is also provided to the Microdisk and the floppy disk File Managers by commands to re-name a disk file, change the filetype, filemode or password of a disk file, change the Microdisk master password, view the directory of a disk drive unit, and view the amount of free space on a disk drive unit.

OSM Disk File Management.

Important elements of the Microdisk File Management design include the following: named file access with password protection, dynamically expandable files, sequential record access, direct record access, alphanumeric keyed sequential access, alphanumeric keyed random access, separate key files, multiple key files, user definable file types, multiple open files with four level access mode locks, automatic read-after-write verification, and re-try logic for maximum data integrity.

There is also a common interface scheme between the floppy disk and the Microdisk File Managers. All the preceding features (except passwords and keyed access modes) apply to the floppy as well. Floppy disk formatting is compatible with the Micropolis PDS 4.0 format.

OSM BASIC File Management.

Micropolis OSM BASIC's file management capabilities are performed through the Microdisk and floppy disk File Managers in OSM. Each file stored on a disk is identified by a file name which may be up to ten characters long, and the files may have an optional password. Files can be BASIC program files, assembly language object files, or data files, and the Microdisk will support index files. Also, permanent and write protect attributes may be assigned on a per file basis.

There are statements to RENAME files, modify the end-of-file MARKER (EOF), and change file attributes (ATTR). Functions are also available to find the name, size, and attributes of a file, as well as to find out how much space is free on a given disk unit.

The File Managers automatically maintain placement of files on the disk, with initial space for a new file allocated by the system at the time of creation. Existing files are automatically extended as necessary without any required preallocation. When a file is SCRATCHed, its space returns automatically to available status.

OSM BASIC.

When BASIC is loaded, you have a powerful set of tools for developing, testing, executing, and maintaining BASIC programs.

OSM BASIC program lines can be as long as 250 characters, and may include multiple statements, the maximum line number being 65,529.

Micropolis OSM BASIC has 11 immediate mode commands, which are as follows: SAVE a file, LOAD a file, SCRATCH a file, LIST a program, DELETE lines from a program, RUN a program, CNTL/C to interrupt a running program, CONT to continue an interrupted program, CNTL/X to cancel an input line, and FLOW and NOFLOW to enable and disable the flow trace debugging aid.

OSM BASIC File Programming.

Micropolis OSM BASIC data file programming is easy to use. You can open files simultaneously for sequential and random (direct) access in both read and write modes — with only one OPEN statement. Up to ten files may be open at one time — with no special buffering provisions necessary.

The CLEAR option lets you open a file for rewrite instead of append, while END option provides you with an on-endfile-goto-capability. And the ERROR option gives you an on-error-goto-capability.

You can also open Microdisk files for keyed sequential and keyed direct access. One or more index key files may be associated with a given data file. Index files may be handled separately or they may be automatically coupled to an open data file. Data is written to, and read from, files using PUT and GET statements with variable lists. This allows a mixture of numeric and string variables. Files must be CLOSEd after use.

This file I/O structure also extends to your printer and terminal output files, to afford you a high degree of device independence. And additional options on the OPEN statement (PAGESIZE and ENDPAGE) facilitate the pagination of output reports. In fact, print files may be easily diverted to terminal or disk simply by changing a file name in the OPEN statement.

The Microdisk subsystem. A timely arrival from Micropolis.

The Microdisk's hardware is available in one, two or three platter configurations, with delivery of formatted storage capacities of 6.2, 18.7, and 31.2 megabytes.

Winchester technology is incorporated in the Microdisk design, which is packaged in two sections. The lower half, which contains the platters, disk heads, and positioner, is completely sealed. The upper half, which is accessible for maintenance, contains four circuit boards, including the Micropolis intelligent controller.

When you get right down to it, the Microdisk subsystem is a much-needed, timely solution for capacity-starved microcomputer users.

Maybe that's one reason why, in just four years, Micropolis is already the second-largest producer of 5¼-inch floppy disk drives — for both OEMs and end-users.

And we won't be number two forever.

MICRODISK SUBSYSTEMS

PART NO.	NO. OF PLATTERS	FORMATTED MEMORY SPACE (M BYTE)	LIST PRICE	OUR PRICE
MCP12611	1	6.1	$4923.00	**$4190.00**
MCP12621	2	18.2	$5148.00	**$4435.00**
MCP12631	3	31.1	$5673.00	**$4935.00**

For S-100 bus Systems, you must order controller and OSM Software Package to the right

S-100 BUS CONTROLLER AND OSM SOFTWARE PACKAGE ON ¼" METAFLOPPY SINGLE (M2), OR DOUBLE (M4) DISKETTES

PART NO.	MEDIA TYPE	LIST PRICE	OUR PRICE
MCPOSM1002	5¼" M2 Diskette	$660.00	**$560.00**
MCPOSM1004	5¼" M4 Diskette	$660.00	**$560.00**

PREREQUISITE: To install your Microdisk subsystem, you must have access to a Metafloppy (M2, or M4) subsystem.

MICRODISK ADD-ON DRIVES

PART NO.	NO. OF PLATTERS	FORMATTED MEMORY SPACE (M BYTE)	LIST PRICE	OUR PRICE
MCP12511	1	6.1	$4458.00	**$3995.00**
MCP12521	2	18.2	$4683.00	**$4250.00**
MCP12531	3	31.1	$5208.00	**$4695.00**

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS

MICROPOLIS™ DISK DRIVE SUBSYSTEMS



At Micropolis, complete means complete.

Some suppliers offer only hardware and call that complete. At Micropolis complete means everything: hardware and software and documentation.

The hardware set is complete with S-100/8080/Z-80 compatible controller, drive(s), cable-even a built-in Autoload bootstrap ROM to eliminate tiresome button pushing.

Our full Disk Extended BASIC and DOS, assembler and editor software comes complete, too. On its own diskette, ready to go. Software from Micropolis includes a DOS and Disk Extended Basic designed for 8080/Z80-based microcomputers.

DOS is a complete package, including an assembler, editor, file management functions and utilities, which provides total support for 8080 programming. BASIC is a self-contained package which provides a powerful set of tools for developing, testing, executing, and maintaining BASIC programs.

BASIC is designed for microcomputers with at least 24K bytes of RAM and a Micropolis MetaFloppy disk system. DOS can be used alone in a 16K bytes memory system.

Activating the built-in Auto load ROM brings up the system under control of the DOS executive. BASIC can be accessed by issuing a simple DOS command.

Both packages are designed for flexible, efficient programming. Both packages use the same file structure and file management scheme for total compatibility. 8080 programs created under DOS can be loaded and accessed from BASIC. Data files created under BASIC can be processed by user written application programs running under the DOS.

At Micropolis, complete means **COMPLETE.**

Imagine getting all the capacity of an 8-inch floppy in a 5¼-inch format.


MetaFloppy can give you this higher capacity because it packs more data into every disk. You get the capacity of larger 8-inch drives with the lower price and smaller packaging of 5¼-inch drives.

An ordinary 5¼-inch floppy provides just 35 tracks/drive and stores only 70K bytes. Not nearly enough for anything useful. So instead, we use 77 tracks—each with 16 sectors of 256 bytes/sector—to yield a capacity of 315K bytes per side. That's more than four times an ordinary 5¼-inch floppy! And why we call this one "quad density."

Combine two of these drives in a compact dual module and you can copy diskettes from one drive to the other, or rearrange data files, or whatever. The dual unit stores 630K bytes. Enough for almost anything. But just in case that isn't enough, our controller can handle two duals (or four singles). That means your micro can have more than a million bytes of formatted disk storage.

If that still isn't enough, on special order you can add a second controller with up to four more drives. That will give you a grand total of over 2,500,000 bytes of storage on-line.

This means, if your application keeps growing, we've got you covered in easy steps. And you get all these bytes at surprisingly low cost.

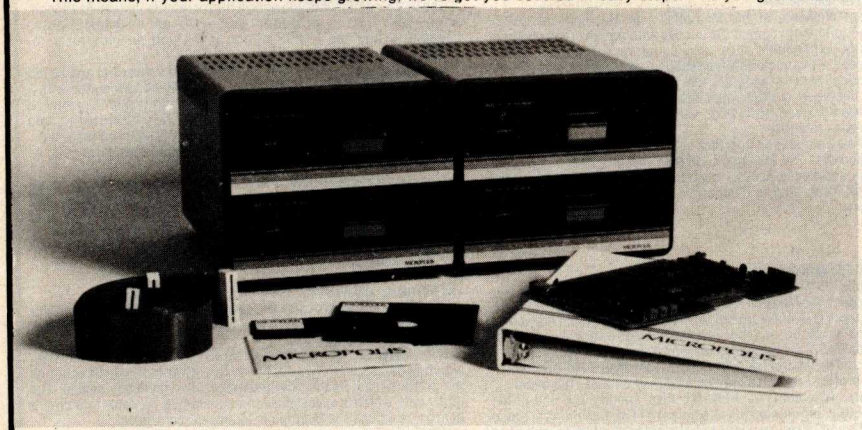

Faster than a speeding bullet.

At Micropolis, we don't skimp on performance to deliver maximum capacity. So you can expect professional operating speed and efficiency. Like checks and balances, such as automatic read verification after writing, that you would expect in a sophisticated data processing system.

Like fast track-to-track positioning time of only 30 milliseconds. And a data transfer rate of 250,000 bits per second.

Up, Up, and away!

Metafloppy gets along well with almost everyone.

So choose the microcomputer you want. MetaFloppy's controller is completely compatible with the S-100/8080/Z-80 buss. It just plugs into your MITS 8800, IMSAI 8080, COMPAL-80, SOL-20, Polymorphic 88, CROMEMCO, TDL, or similar micro and it's ready to go. The memory mapped controller/bootstrap may be origined at any 1K byte boundary in the 48K to 64K byte region of memory.

For small businesses, for engineers who want to develop their own software, or for the advanced hobbyist, MetaFloppy is ideal.

METAFLOPPY DISK SUBSYSTEMS

Subsystems complete with BASIC, DOS, Assembler/Editor, Users Manual, S-100 Controller, complete Calling, Cabinet, and Power Supply.

DOUBLE SIDED

PART #	DESCRIPTION	LIST PRICE	OUR PRICE
MCP-1054-4	Four-disk system with 2,520,000 bytes (formatted) on-line storage capacity. 50 lbs.	$4,622.00	$3,995.00
MCP-1053-4	Two-disk system with 1,260,000 bytes (formatted) of on-line storage capacity. 25 lbs.	$2,605.00	$2,295.00
MCP-1043-4	One disk system with 630,000 bytes (formatted) of on-line storage capacity. 16 lbs.	$1,501.00	$1,298.00

SINGLE SIDED

PART #	DESCRIPTION	LIST PRICE	OUR PRICE
MCP-1054-2	Four-disk system with 1,260,000 bytes (formatted) on-line storage capacity. 50 lbs.	$3,290.00	$2,895.00
MCP-1053-2	Two-disk system with 630,000 bytes (formatted) of on-line storage capacity. 25 lbs.	$1,895.00	$1,650.00
MCP-1043-2	One disk system with 315,000 bytes (formatted) of on-line storage capacity. 16 lbs.	$1,145.00	$999.00

Subsystems complete with BASIC, DOS, Assembler/Editor, Users Manual, S-100 Controller, Cabinet and Data Cable.

Requires DC Regulator Kit (Part # MCP-109101), to convert raw S-100 Buss DC supplies to voltages necessary for the Drive Module.

DOUBLE SIDED

PART #	DESCRIPTION	LIST PRICE	OUR PRICE
MCP-1041-4	One-disk system with 630,000 bytes (formatted) of on-line storage capacity.	$1,419.00	$1,250.00

SINGLE SIDED

PART #	DESCRIPTION	LIST PRICE	OUR PRICE
MCP-1041-2	One-disk system with 315,000 bytes (formatted) of on-line storage capacity.	$1,045.00	$940.00

ADD-ON STORAGE MODULES

The MetaFloppy Add-On Storage Modules provide additional storage by adding more drives to the controller supplied with the subsystems. A maximum of four drives can be attached to each controller by use of the daisy chain cables.

Add-On modules do not include Controller, User's Manual or diskettes.

DOUBLE SIDED

PART #	DESCRIPTION	LIST PRICE	OUR PRICE
MCP-1033-4	Two-disk 1,260,000 byte add-on with enclosure and power supply. Requires daisy chain cable. 25 lbs.	$2,022.00	$1,860.00
MCP-1023-4	One-disk 630,000 byte add-on with enclosure and power supply. Requires daisy chain cable. 16 lbs.	$930.00	$855.00
MCP-1021-4	One-disk 630,000 byte add-on with enclosure. Requires daisy chain cable and regulator kit. 8 lbs.	$834.00	$765.00


SINGLE SIDED

PART #	DESCRIPTION	LIST PRICE	OUR PRICE
MCP-1033-2	Two-disk 630,000 byte add-on with enclosure and power supply. Requires daisy chain cable. 25 lbs.	$1,395.00	$1,279.00
MCP-1023-2	One-disk 315,000 byte add-on with enclosure and power supply. Requires daisy chain cable. 16 lbs.	$645.00	$595.00
MCP-1021-2	One-disk 315,000 byte add-on with enclosure. Requires daisy chain cable and regulator kit. 8 lbs.	$545.00	$498.00

WE ACCEPT VISA, and MASTER-CHARGE

PRIORITY ONE ELECTRONICS

MICROPOLIS™ DISC DRIVE SUB SYSTEMS

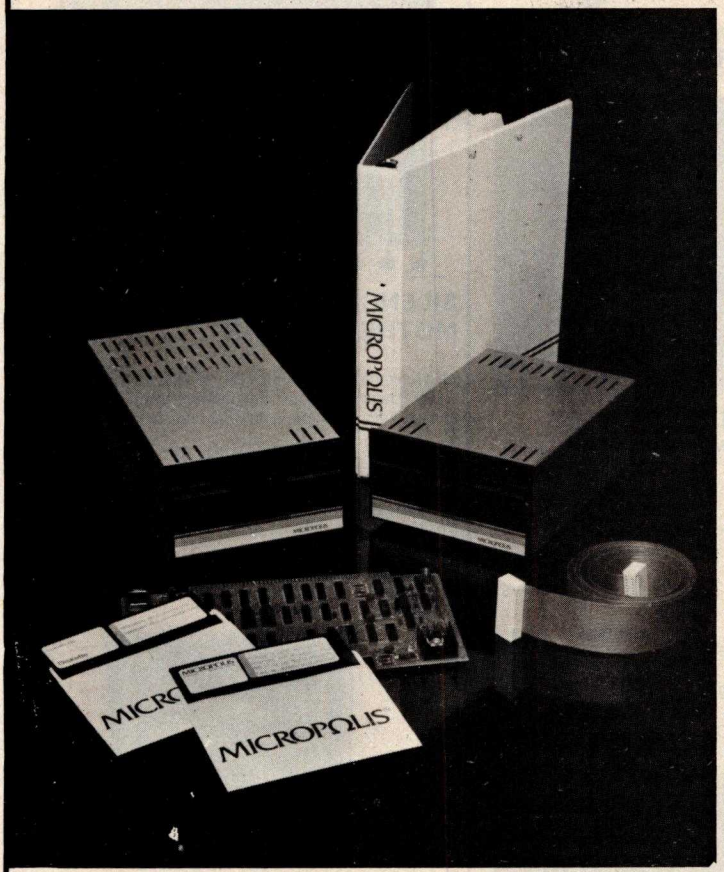

At Micropolis, we pack 100% more capacity into a 5¼-inch floppy.

Meet the Micropolis MacroFloppy. From the Greek "macro," meaning "large, great."

The MacroFloppy: 1041 and :1042 disk drive subsystems give you up to two times greater storage capacity than ordinary 5¼-inch floppy disks. 143K bytes, to be exact. For less money than you'd think possible. Both substems, in fact, are the lowest cost approaches to adding the capabilities of a floppy to your S-100 system.

The 70K (or thereabouts) bytes provided by most 5¼-inch floppies have never been enough. Expecially today, when you need more high-speed random access storage than ever. To help you work with larger data files. And use programs bigger than your computer's memory.

MacroFloppy provides you with that needed extra storage. And so economically.

Two complete subsystems. Ready to go.

Both the MacroFloppy: 1041 and :1042 are fully assembled, tested, burned-in, and tested again. For zero start-up pain and long term reliability. They're also backed up by our famous Micropolis factory warranty.

They both come complete with the powerful, field-proven Micropolis extended disk BASIC. And both subsystems allow upward capability of BASIC programs with the high-capacity MetaFloppy quad density floppy subsystems.

So you can use the low-cost MacroFloppy for program development, and upgrade later to the high capacity MetaFloppy.

In other words, if your application keeps growing, we've got you covered.

At Micropolis, you get it all. From a single source.

Some suppliers offer only hardware and call that everything. At Micropolis, everything means everything: hardware, software, and documentation.

The MacroFloppy: 1041 comes packaged inside a protective enclosure (without power supply). And includes an S-100 controller. Interconnect cable. And 2 diskettes, one of them the Micropolis BASIC, a compatible DOS, assembler and editor. The:1041 is even designed to be used either on your desk top, or to be integrated right into your S-100 chassis. A d.c. voltage regulator kit, 1091-01, is available to convert your S-100 chassis raw supplies to levels suitable for the :1041, at small additional cost.

The MacroFloppy: 1042 comes with everything the :1041 has, and more. Such as d.c. regulators, its own line voltage power supply, and to top it off, a striking cover. Making it look right at home just about anywhere.

To complete the package, we even include a comprehensive User's Manual including software descriptions, that tells you just what to do, and how to do it.

Because we know that you need it all.

MACROFLOPPY DISC SUBSYSTEMS


PART #	DESCRIPTION	LIST PRICE	OUR PRICE
MCP-1042-I	One-disk system with 143,000 bytes capacity. 16 lbs.	$795.00	**$698.00**
MCP-1041-I	One-disk system with 143,000 bytes capacity. Requires d.c. regulator kit, part number 1091-01, to convert raw S-100 bus d.c. supplies to voltages necessary for the drive module. 10 lbs.	$695.00	**$610.00**

MACROFLOPPY ADD-ON STORAGE MODULES

The two versions of the MacroFloppy add-on storage modules are:

		LIST PRICE	OUR PRICE
MCP-1021-I	One-disk 143,000 byte add-on with enclosure. Requires daisy chain cable and regulator kit. 8 lbs.	$445.00	**$410.00**
MCP-1022-I	One-disk 143,000 byte add-on with enclosure and power supply. Requires daisy chain cable. 15 lbs.	$545.00	**$499.00**

NOTE: Add-on modules do not include Controller, User's Manual or Diskettes.

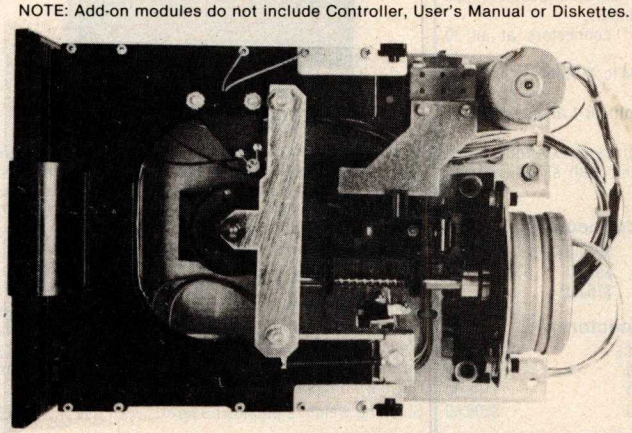



CABLES (1 lb.)

MCP-1083-01	Standard interface cable A, with 2 connectors for use with 1 storage module attached to controller.	**$25.00**
MCP-1083-02	Daisy chain interface cable B, with 3 connectors for use with 2 storage modules attached to controller.	**$35.00**
MCP-1083-03	Daisy chain interface cable C, with 4 connectors for use with 3 storage modules attached to controller.	**$50.00**
MCP-1083-04	Daisy chain interface cable D. with 5 connectors for use with 4 storage modules attached to controller.	**$65.00**
MCP-1092-06	Power cable A, to be used in conjunction with 1015/1016 series drives.	**$ 8.00**
MCP-1092-07	Power cable B, to be used in conjunction with 1021/1041 series systems.	**$ 8.00**

ACCESSORIES

MCP-1091-01	Regulator kit for 1041, 1021, 1015 and 1016.	**$20.00**
MCP-1092-01	Relocatable bootstrap kit.	**$25.00**
MCP-1093-03	Poly 88 kit (relocated BASIC MDOS)	**$25.00**






Each one of our floppy disks has a remarkable storage capacity, eliminating the need to keep bothersome stacks of paper.

PLEASE ORDER BY PART NUMBER


GODBOUT



CK-017 ACTIVE TERMINATOR

Active termination promotes reliable and accurate data transfer by minimizing the ringing, cross-talk, overshoot, noise and other gremlins that can occur with unterminated lines. Also saves considerable energy compared to passive termination systems, thereby putting less strain on your power supply and keeping heat out of the enclosure. All lines (except power & ground) terminated to 2.7 V through 270 ohms.


GBT-106U Kit 1 lb. $34.95



Extender/Terminator

- Active and/or dynamic termination
- All power lines fused for protection
- All S-100 lines labeled and numbered
- Can be used as an extender and/or terminator
- Solder mask both sides of board
- Silkscreened reference designations
- Gold plated fingers


CCS-2520AK Kit 1 lb. $39.95

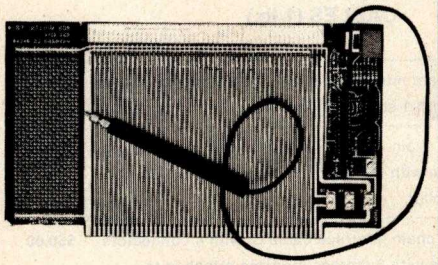

S-100 Extender Board

Includes built-in logic probe, great instructions. Allows you to troubleshoot and work on boards outside of the system. Ideal for taking measurements; makes probing the board easy. Includes non-slip type probe. Logic probe indicates H, L, & pulse train w/3 different colored LEDs. Kit form.

MUL-CK004 ..... $59.00




MUL-CK011
S-100 Relay/Opto-isolator Kit

S-100 compatible, 8 fast reed relays respond to an 8 bit word. Also, 8 opto-isolators accept an 8 bit word from outside and send it to your computer for handshaking or further control purposes. Good for model railroad, burglar alarm, audio switching, automated display, ham radio and other uses.

MUL-CK011K ..... Kit $129.00
MUL-CK011 ..... A&T $179.00

GODBOUT


S-100 MOTHERBOARDS

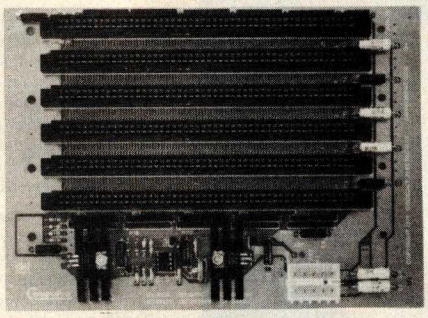

S-100 MOTHERBOARDS
WITH ACTIVE TERMINATION & SHIELDING

- 6, 12, or 20 slot
- Active termination for buffering to 2.7 volts at 280 ohms
- Standby current, a low 15-20 MA
- Shielding further reduces noise factor
- All power is brought out to a block connector for convenience.
- S-100 connectors are .125" pin to pin on 3/4" centers.
- Assembled and tested.

		LIST PRICE	OUR PRICE
GBT-153U	UNKIT 6 SLOT		$ 89.00
GBT-153A	A&T 6 SLOT	$129.00	$119.00
GBT-154U	UNKIT 12 SLOT		$129.00
GBT-154A	A&T 12 SLOT	$169.00	$149.00
GBT-155U	UNKIT 20 SLOT		$174.00
GBT-155A	A&T 20 SLOT	$214.00	$189.00



THE WUNDERBUSS with Noiseguard® High-performance S-100 bussboards

Shown: **WÜNDERBUSS™/20**

Capacity: 20 positions
Dimensions: 17¼" x 8½"

Specifications:


- Edge Connectors: S-100 type, .125" spacing on 3/4" centers.
- Shielding: Every signal fully shielded by both interconnected ground lines, 2nd cross-coupled ground planes.
- Termination: Active termination of each line. Termination network includes LM 201 op amp and 2 PNP/NPN pairs for buffering to 2.4 volts at 180 ohms.
- Mounting: Holes at each edge connector position, plus auxiliary holes to fit IMSAI cabinet.
- Power Connectors: "Fast on" connectors at all 10 positions.
- Power Required: 7 to 10 volts; 14 to 20 volts; —14 to —20 volts.
- Peripheral Power Outputs: 5 volts at 1 amp, 12 volts at 500ma; —12 volts at 500ma.
- Circuit Board: Double-sided glass epoxy with plated through holes. Solder mask on both sides and part legend.

KITS (less S-100 connectors)

THT-WB8K	$54.00
THT-WB12K	$65.00
THT-WB20K	$76.00

A&T (with connectors)


	LIST PRICE	OUR PRICE
THT-WB8A	$144.00	$136.00
THT-WB12A	$175.00	$165.00
THT-WB20A	$226.00	$209.00

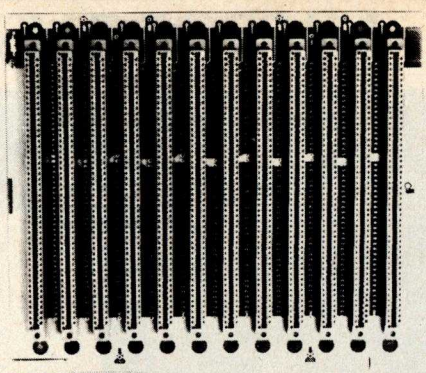

SILENCE + MOTHERBOARDS

+ No Need for Termination + Very High Crosstalk Rejection + LED Power Indicator + Fits in Most Mainframes + 6, 12, and 18 Slots Available + Has Operated in 14 MHz Quietly.


QTC-MB6BB	6 SLOT BARE BOARD	$ 25.00
QTC-MB6K	6 SLOT KIT	$ 40.00
QTC-MB6A	6 SLOT A&T	$ 50.00
QTC-MB12BB	12 SLOT BARE BOARD	$ 30.00
QTC-MB12K	12 SLOT KIT	$ 70.00
QTC-MB12A	12 SLOT A&T	$ 90.00
QTC-MB18BB	18 SLOT BARE BOARD	$ 50.00
QTC-MB18K	18 SLOT KIT	$100.00
QTC-MB18A	18 SLOT A&T	$140.00



MOTHERBOARD
WITH ACTIVE TERMINATION

- Twelve-slot capability using standard S-100 connectors
- Low-reactance pin connectors to eliminate ringing and data error
- "Double path" trace pattern which halves the line inductance
- On-board voltage regulator
- Active termination to regulate signal line voltages
- Wide spacing of bus lines
- Criss-cross bus lines to minimize signal noise
- Distributed by-passing of all power lines
- Capability of supporting CPUs at 4 MHz and above
- Solder mask on both sides of board
- Simple, strong mounting

CCS-2501A $119.95




VCT-8803 Motherboard for S-100 Bus Microcomputer

Mounts 11 receptacles with 100 contacts or 10 receptacles plus interconnectors to smaller boards for expansion. Connectors mount with tabs protruding through .038 inch (1 mm) diameter holes in rows spaced .250 inch (6.4 mm) on each connector position and 0.75 inch (19 mm) between connector positions. Includes etched circuit and instructions for active or passive terminations plus 12 tantalum capacitors for +5, +12, —12 volt buses, and spacers for mounting in Vector VP1 or VP2 cases. G-10 epoxy glass board with 2 ounce copper, solder plated circuitry plus solder mask to avoid accidental short circuits. Large buses: +5 V and GND (10 amps), +12 V or 16 V (7 amps). Current ratings are per MIL-STD-275 with 10° rise.

Shipping weight 2 pounds (.9 kg) $29.50

ORDER TOLL FREE (800) 423-5633


PRIORITY ONE ELECTRONICS



MAINFRAMES


THE BMW OF S-100 MAINFRAMES

From the power supply through the sturdy chassis, TEI constructs and assembles each mainframe with great care. Every TEI mainframe utilizes a constant voltage transformer (CVT) which delivers clean, regulated power at the proper level, reducing the heat in the computer cards. The output voltage on the transformer remains nearly even with the input voltage varying from approximately 85V to 140V. This means the mainframe will never notice voltage variations or even a brownout. It also provides 100 dB noise rejection to protect the computer from voltage spikes and line noise.



TEI 22 slot and 12 slot mainframes offer a S-100 motherboard which is grounded, shielded and actively terminated for high speed operation now or for later upgrading. Each mainframe is shipped completely assembled, tested and burned in, with fan, washable filter, all connectors and card guides. Rackmount models are available in both 22 and 12 slot mainframes. The combination of the lowest noise bus, a regulated CVT power system and a rugged chassis produces a mainframe without equal.

	S-100 MAINFRAMES	LIST PRICE	OUR PRICE
TEI-MCS 112	12 Slot Desk	**$685.00**	**$615.00**
TEI-MCS 122	22 Slot Desk	**$845.00**	**$760.00**
TEI-RM 12	12 Slot Rackmount	**$800.00**	**$720.00**
TEI-RM 22	22 Slot Rackmount	**$945.00**	**$850.00**
Shipping Weight:	On 12 Slot Mainframes	35 Lbs.	
	On 22 Slot Mainframes	50 Lbs.	
	S-100 MAINFRAMES WITH 3 CUTOUTS FOR 5¼" FLOPPY DISK DRIVES INTERNAL CABLING IS PROVIDED		
TEI-TF12	12 Slot	$695.00	**$625.00**
TEI-RM12	12 Slot	$795.00	**$715.00**
Shipping Weight: 40 Lbs.			

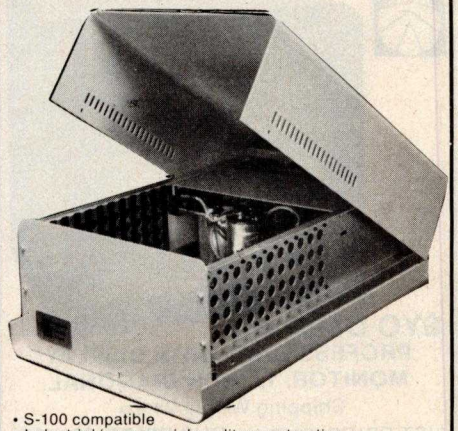

- S-100 compatible
- Industrial/commercial quality construction
- Flip-top cover
- Excellent cooling capability
- 12 slot capability (uses model 2501A)
- Input 105, 115, or 125 VAC
- Output +8 VDC20A, + – 16 VDC 4A
- Active termination of all bus lines
- Fan and circuit breaker included
- Rugged construction

		List	Our Price
CCS-2200A	Assembled & Tested 35 lbs	$399.00	**$369.95**
CCS-2200AK	Kit 35 lbs		**$349.95**



THINKER TOYS 8" DISK DRIVE CABINET

George Morrow is recognized as a pioneer and an industry leader because of his innovative designs and participation on the S1000 IEEE Standards Committee. George has designed these floppy disc enclosures with power supply, which incorporates the following features:

- Internal data cable and power cables
- Data signals are terminated at the back of the cabinet with a socket/header connector
- Regulated power supply with protection circuitry
- Clean, attractive appearance
- Stackable
- Accommodates Shugart SA801R, SA800R, SA581R, SA850R, Siemans FDD120/200 Series, Demex 2000, Remex 4000
- Vented chassis for cool, reliable operation
- Color Beige
- Shipping weight: 20 lbs. (single drive cabinet)
  30 lbs. (dual drive cabinet)

THT-DC1	Single Drive Cabinet	**$ 250.00**
THT-DC2	Dual Drive Cabinet	**$ 375.00**

BUY CABINET AND SHUGART 801R DRIVES AND $AVE

SINGLE CABINET

THT-S801R1P **$ 720.00**


DUAL CABINET

WITH ONE DRIVE		WITH TWO DRIVES	
THT-D801R1P	**$825.00**	**THT-D801R2P**	**$1250.00**

Shipping Weight: Add 15 lbs per drive

EXTERNAL DATA CABLES

PRI-50 SK SK	Socket to Socket	**$ 19.95**
PRI-50 CE SK	Cardedge to Socket	**$ 19.95**
PRI-50 CE CE	Cardedge to Cardedge	**$ 19.95**

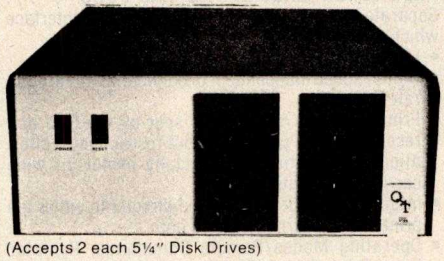


(Accepts 2 each 5¼" Disk Drives)

MF + MD

Includes cabinet, 18 amp power supply, IEEE S-100 Motherboard (6-12 slot) and dual-mini-disk provision with disk drive power supply. The QT + MF + MD is fan-cooled, has AC line filter to eliminate EMI, and is fully assembled and factory tested. Power and reset switches are located on the front panel.


QTC-MF+MD12 **$500.00** **QTC-MF+MD6** **$450.00**
QTC-MF+MD Without Mother Board **$400.**

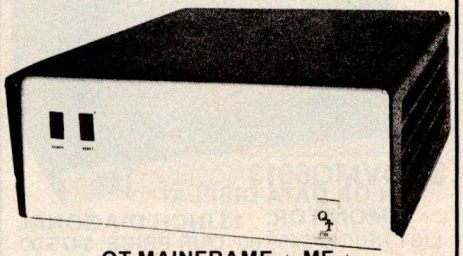

QT MAINFRAME + MF +

Includes cabinet, 30 amp power supply, and the IEEE S-100 motherboard (12 or 18-slot). The QT MF+ is fan-cooled, has AC line filter to eliminate EMI, and is fully assembled and factory tested. Power and reset switches are located on front panel.

QTC-MF+12 **$450.00** **QTC-MF+18** **$500.00**
QTC-MF+ Without Mother Board **$350.00**

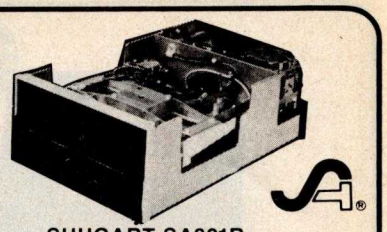

SHUGART SA801R


SHU-801R **$499.00**
2 OR MORE **$470.00**

Capacity	Single Density	Double Density
Unformatted		
Per Disk	3.2 megabits	6.4 megabits
Per Track	41.7 kilobits	83.4 kilobits
IBM Format		
Per Disk	2.0 megabits	n/a
Per Track	26.6 kilobits	n/a
Transfer Rate	250 kilobits/sec.	500 kilobits/sec.
Latency (average)	83 ms	83 ms
Access Time		
Track to Track	8 ms	8 ms
Average	260 ms	260 ms
Setting Time	8 ms	8 ms
Head Load Time	35 ms	35 ms

Shugart's SA801 standard floppy disk drive is the established industry leader with over 85,000 units installed around the world. This floppy disk drive application leadership is backed by 17 patents and a technical staff with hundreds of man-years of disk drive engineering experience.

The SA801R floppy disk drive is mechanically and electronically the same as the SA801 except it has a narrower chassis width plus side and bottom mounting posts to facilitate installation of two drives side-by-side in a standard 19" RETMA rack.

Shipping Weight 15 lbs.



SHUGART SA400

ACTIVITY LIGHT	
WRITE PROTECT CIRCUITRY	
CAPACITY	110 KB
TRACKS	35
HEADS	1
BIT TRANSFER RATE	125K bits/sec.
RECORDING DENSITY	2600BPI max.
AVERAGE ACCESS TIME	550 msec.
DRIVE DIMENSIONS	3.25"H x 5.75"W x 8"L
SHIPPING WEIGHT	4 LBS.

SHUGART SA400 5¼"
110 KB, 35 tracks
SHU-SA400 ..... **$295.00**

IN A CABINET
WITH POWER SUPPLY
LBO-SA400 PC **$395.00**



GODBOUT S-100 MAINFRAMES


- Rugged metal frame
- Line cord
- Line filter
- fan
- Fuse holder
- 2 Convenience outlets
- Cardguides
- Base is drilled to accept all vector & Godbout motherboards
- Desk and rack mount
- Back panel has cutouts for 12-DB25, 3-DA15, & 2-DD50 connectors

GBT-BOX DESK **$289.00**
GBT-BOX RACK **$329.00**

SHIPPING WEIGHT: 23 LBS

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS

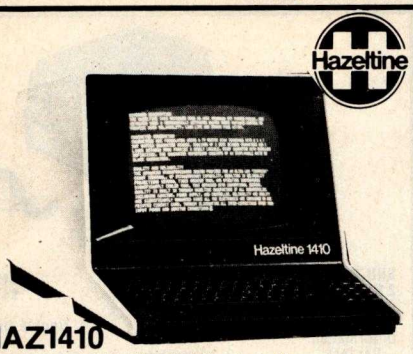


HAZ1410

Shipping Weight 48 lbs.

STANDARD FEATURES:

- Separate integral 12-key Numeric Pad
- All 128 ASCII Codes
- 64 Displayable Characters
- 24 x 80 Screen Configuration
- High Resolution using a 5 x 7 Dot Matrix
- TTY-Style Keyboard Layout
- Cursor Addressing and Sensing
- EIA Interface
- Eight Selectable Transmission Rates up to 9600 Baud
- Microprocessor Based
- Remote Commands
- Attractive Styling for Contemporary Environments

LIST PRICE: $850.00
OUR PRICE: $798.00

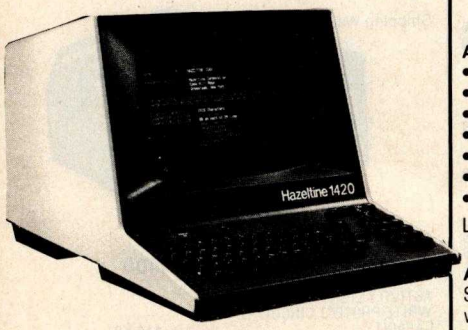

HAZ1420

Shipping Weight 48 lbs.

ALL THE FEATURES OF THE "1410" PLUS . . .

- 94 Displayable Characters including lower case
- 15 key Numeric Pad including (+),(-) and Enter
- User-Defined Video Presentation — Hi/Lo Intensity Blink, or Non-Display
- Cursor Control Keys
- Typematic
- Typewriter-Style Keyboard
- Field Tab
- Column Tab
- Twelve Operator Function Keys
- Non-Glare Screen
- Audible Alarm
- Remotely-Controlled Auxiliary EIA Input/Output Interface (Option)

LIST PRICE: $995.00
OUR PRICE: $949.00

HAZ1421

Shipping Weight 48 lbs.

- All 128 ASCII Codes
- 95 Displayable Characters including Lower Case
- High Resolution using a 5 x 9 Dot Matrix including two Lower Case Descenders
- Typewriter-Style Keyboard Layout
- User-defined Video Presentation
- Cursor Addressing and Sensing
- EIA Interface
- Eight Transmission Rates up to 9600 Baud
- Non-Glare Screen
- Self Test
- 12-Key Numeric Pad
- Switch-Selectable Emulation: ADM 3A/Consul 580/HAZELTINE 1400 Series

LIST PRICE: $895.00
OUR PRICE: $859.00



HAZ1500

Shipping Weight 48 lbs.

STANDARD FEATURES:

- All 128 ASCII Codes
- 94 Displayable Characters Including Lower Case
- 24 x 80 Screen Configuration
- High-Resolution Characters Using a 7 x 10 Dot Matrix
- ANSI standard Keyboard Layout including Numeric Pad
- Cursor Addressing and Sensing
- Dual Intensity
- EIA and 20MA Interface
- Nine Selectable Transmission Rates Up to 19.2 KB
- Auxiliary EIA Output
- Remote Editing Commands
- Standard or Reverse Video
- Microprocessor Based

LIST PRICE: $1095.00 **OUR PRICE: $1050.45**

HAZ1510

Shipping Weight 48 lbs.

ALL THE FEATURES OF THE "1500" PLUS . . .

- Cursor Control Keys
- Protected/Unprotected Data
- Transmit Page, Line or batches of information
- Function Keys — up to 127
- Tab/Back Tab/Auto Tab
- Format Mode with Insert and Delete Line Keys
- 31 Remote Commands including "Terminal Status"

LIST PRICE: $1195.00 **OUR PRICE: $1125.00**

HAZ1520

ALL THE FEATURES OF THE "1510" PLUS . . .
Separate Microprocessor-Controlled Printer Interface which allows:

- Interfacing of both serial and parallel printers
- Printer speed independent of communications baud rate
- Printer control codes to be sent by the CPU and received by the printer without restriction or alteration of the terminal (especially useful for wide carriage applications)
- Information to be transmitted directly to either the printer or the terminal, or to both
- Operating Modes/Remote Commands; Remote/Local Print; Printer On-Line with/without Display; Printer Off-Line

Shipping Weight 48 lbs.

LIST PRICE: $1450.00 **OUR PRICE: $1395.00**



SYOVMC6013

COLOR DATA DISPLAY MONITOR, 13 INCH DIAGONAL

LIST PRICE: $495.00 **OUR PRICE: $475.00**
High performance color data display monitor for use with color capable computer systems. Features an in-line gun, slotted black matrix CRT with 90 sq. inch viewing area; up front controls and easy care steel cabinet. Standard EIA timing provides a 16 line x 64 character display format. Requires 1.0 volt p-p composite video input. Shipping Weight 37 lbs.



SYOVM4509

DATA DISPLAY MONITOR, 9 INCH DIAGONAL

Shipping Weight 15 lbs.

LIST PRICE: $220.00
OUR PRICE: $198.00
Compact, affordably priced data display monitor is ideal for personal use or where space is limited. Features a 44 sq. inch viewing screen; white data display; up-front controls and easy care steel cabinet. Standard EIA timing provides a 16 line x 64 character display format. Requires 1.0 volt p-p composite video input.



SYODM5012

HIGH PERFORMANCE DATA DISPLAY MONITOR, 12 INCH DIAGONAL

Shipping Weight 24 lbs.

LIST PRICE: $315.00 **OUR PRICE: $298.00**
Designed for use with advanced level computer systems. Features an anti-reflective, 75 sq. inch viewing screen; white, high resolution data display; up-front controls and easy care steel cabinet. Computer compatible timing provides a 24 line x 80 character display format. Requires 1.0 volt p-p composite video input.



SYO DM5112

PROFESSIONAL DATA DISPLAY MONITOR, 12 INCH DIAGONAL

Shipping Weight 24 lbs.

LIST PRICE: $325.00 **OUR PRICE: $310.00**
This professional data display monitor features an anti-reflective, 75 sq. inch viewing screen and green, high resolution data display for maximum viewing comfort. Also featured are up-front controls and easy care steel cabinet. Computer compatible timing provides a 24 line x 80 character display format. Requires 1.0 volt p-p composite video input.

VISIT OUR RETAIL STORE

PRIORITY ONE ELECTRONICS

CENTRONICS® 737 DOT MATRIX PRINTER LETTER QUALITY



Standard Features:
- 80 cps—proportional spaced model
- 50 cps—monospaced mode
- proportional spacing, plus 10 cpi and 16.7 cpi
- Nx9 (proportional) or 7x8 (monospaced) dot matrix
- 3 way paper handling system
- 96 character ASCII
- microprocessor electronics
- expanded print
- right margin justification
- print underlining
- 9-wire free flight print head
- bidirectional stepper motor paper drive
- full one line buffer
- 21 lpm with 80 columns printed
- 58 lpm with 20 columns printed
- 6 lines per inch vertical spacing
- paper tear bar
- parallel or serial interface
- 50 to 9600 baud switch selectable

	List Price	Our Price
CEN-7371 Parallel	$ 995.00	**$895.00**
CEN-7373 Serial	$1045.00	**$950.00**



CENTRONICS 730 DOT MATRIX PRINTER

Standard Features:
- 100 characters/second
- 80 characters/line
- 10 characters/inch
- 3-way paper handling system
- 7x7 dot matrix
- 96 character ASCII
- microprocessor electronics
- unidirectional print at 5.0 ips
- high speed return approximately 10 ips
- 21 lpm with 80 columns printed
- 58 lpm with 30 columns printed
- 80 character buffer
- 6 lpi vertical
- Parallel or serial interface

	List Price	Our Price
CEN-7301 Parallel	$795.00	**$725.00**
CEN-7303 Serial	$845.00	**$775.00**



CENTRONICS® MICROPRINTER
Nonimpact Desk-Top Printers

Features:
• 150 Lines Per Minute • 96 Characters—Upper and Lower Case • 5/10/20 Characters/Inch—Software Selectable • Elongated characters • Underlining • Simplified Operation • Quiet • Audio alarm • Long Life—Only 4 Moving Parts • Small Size and Light Weight • No Toners/Ribbons Required •

The paper requires no toners or ribbons. Instead, it carries a conductive aluminized coating which is vaporized by a low voltage discharge from the print head to produce highly readable characters.

CEN-P1 ..... **$349.00**


CONDUCTIVE ALUMINIZED PAPER FOR THE CENTRONICS P1 AND S1 PRINTER

CEN-P1S1PAP—CASE OF 5 ROLLS **$29.95**

Shipping Weight: 4 lbs.

MODEMS

THE STAR MODEM from LIVERMORE



FEATURE FITS GTE HANDSETS!

2 YEAR WARRANTY

EXCLUSIVE ACOUSTIC CHAMBERS


The exclusive triple seal of Livermore's new flat mounted cups locks the handset into the acoustic chamber yielding superior acoustic isolation and mechanical cushioning. Designed to adapt to most common handsets used throughout the world, the STAR offers the utmost in flexibility and transmission reliability.

Specifications:
- **Data Rate:** 0 to 300 baud
- **Compatibility:** Bell 103 and 113; CCITT
- **Frequency Stability:** ±0.3 percent. Crystal controlled
- **Receiver Sensitivity:** —50 dBm ON, —53 dBm OFF
- **Modulation:** Frequency shift keyed (FSK)
- **Carrier Detect Delay:** 1.2 seconds ON; 120 msec OFF
- **EIA Terminal Interface:** Compatible with RS 232 specifications
- **Teletype Interface:** 20 milliampere current loop
- **Optional Interfaces:** IEEE 488; TTL; TTY 43
- **International (CCITT) frequencies available**
- **Switches:** Originate/Off/Answer; Full Duplex/Test/Half Duplex
- **Indicators:** Transmit Data, Receive Data, Carrier Ready, Test
- **Power:** Supplied by 24 VAC/150 MA UL/CSA listed wall-mount transformer. Input 115 VAC, 2.5 watts. (A 220 VAC, 50 Hz adaptor is available upon request.)
- **Dimensions:** 10'' x 4'' x 2''
- **Weight:** 1.74 lbs. (3 lbs. shipping weight including AC adaptor.)
- **Warranty:** Two years on parts and labor, excluding the AC adaptor which carries the manufacturer's warranty

Part No.	Description	List Price	Our Price
LIV-STAR	RS232, TTL Modem	$199.00	**$149.00**
LIV-STAR20M	RS232, 20MA Current Loop	$199.00	**$149.00**
LIV-STAR-V21	CCITT European Standard	$229.00	**$219.00**
LIV-IEEE	IEEE 488 Standard	$395.00	**$298.00**
LIV-IEEE-V21	IEEE 488, CCITT Standard	$465.00	**$398.00**

CABLES

Part No.	Description	Price
CND-RS2328F	RS232 8 Cond 8 ft.	**$19.95**
LIV-I2I	IEEE to IEEE 2 Meter	**$59.95**
LIV-I2PET	IEEE to Pet 2 Meter	**$59.95**




NOVATION CAT MODEM

- 0-300 Baud
- Bell 103
- Answer, Originate

Part No.	List Price	Our Price
NOV-CAT	$198.00	**$175.00**

Shipping weight: 3 lbs.



NOVATION D-CAT **NEW**

Data Rate: 0-300 Baud. **Compatibility:** Bell 100 series. **Interface:** EIS RS232 C. **Modes:** Data, Talk, Monitor, Normal and Test. **Duplex:** Half, Full. **Indicators:** Ready, Power


Novation proudly announces a worthy complement to the famous CAT™. It's the D-CAT. The first directly coupled modem with the portability, ease of use and low cost of an acoustic. D-CAT is the only direct modem that is FCC approved for handset jack connection with any modular phone. It operates with either single or multi-line telephones without the need of adapters.

Part No.	List Price	Our Price
NOV-DCAT	$199.00	**$195.00**

YOU MUST HAVE A PHONE WITH MODULAR CONNECTORS.

Shipping weight: 3 lbs.

PRINTERS



ANACOM 150 DOT MATRIX PRINTER

Features:
- 150 Characters per second
- Bidirectional printing, logic seeking
- 9 x 9 Dot matrix
- Upper and lower case with descenders
- Double width characters
- 10 characters per inch—horizontal
- 6 or 8 lines per inch—vertical
- Uses a snap-in cartridge ribbon
- Adjustable tractors
- Original and 4 copies
- Paper out sensor
- 90 day factory warranted
- Parallel or serial interface

Printers	List Price	Our Price
ANA-150P Parallel	$1350.00	**$1095.00**
ANA-150S Serial	$1350.00	**$1095.00**

REPLACEMENT PERSONALITY MODULES

ANA-PC Parallel Module	**$75.00**
ANA-SC Serial Module	**$75.00**
ANA-RIBBON Cartridge Nylon	**$15.00**

OPTIONS
Options must be ordered with printer

ANA-600ELH 600 Million Impact Extended Life Head	**$150.00**
ANA-BELL Programmable Bell Circuit	**$75.00**
ANA-240V50C 240VAC 50 Cycle Power Supply	**$30.00**

Novation

A NEW BREED OF MODULAR MODEMS FROM NOVATION

NOV-4102D Originate Only	**$340.00**
NOV-4103B Auto Answer/Manual Originate	**$399.00**
NOV-4113B Auto Answer Only	**$365.00**

Novation presents the first fully integrated modern system for the future.

Their new line of 300 baud direct connect modems are the best for reliability, economy and convenience.

Novation's direct connect modems meet all requirements for the FCC ruling on Part 68, eliminating the cost and need for a Bell DAA (data access arrangement). It saves even more through a simplified, economical installation procedure, using a modular T-adapter—a Novation exclusive.

MODULATION: FSK, phase coherent. **OPERATING MODE:** 4102 Originate, 4103B Auto Answer/Manual Originate, 4113B Auto Answer Only. **COMMUNICATION MODE:** Full, Half duplex. **PHONE LINE INTERFACE:** Direct-connect per FCC Part 68. Modular Plug mates with standard telephone Modular Jack (USOC-RJ11C). FCC registration No. AU492X-70157-PC-N. Ringer equivalence 0.3A, 1.0B. **BELL COMPATIBILITY:** 4102D 103A, 4103B 103A, 4113B 113B, **CARRIER DETECT:** Sensitivity: −50dBm On delay: 150 ms (+, −15ms) Off Delay: 50 ms (+, −5ms) Noise Rejection 0dBm **TRANSMITTER: 4102D** On Delay: Coincident with carrier detect—Off Delay: Coincident with carrier loss—Level −9dBm **4103B** On Delay: Originate: Coincident with carrier in originate Answer: 2.5 sec (+, −.5 sec) after automatic answer. Off Delay: Originate: Coincident with carrier loss. Answer: Coincident with line disconnect. Level −9dBm (factory fixed) **4113B** On Delay: Originate: Coincident with carrier in originate. Answer: 2.5 sec (+, −.5 sec) after automatic answer. Off Delay: Originate: Coincident with carrier loss. Answer: Coincident with line disconnect. Level: −9dBm (factory fixed) **INTERNAL SWITCH OPTIONS: 4102D:** None **4103B** Abort Timer 18 Sec. Abort Timer: 6 sec. Carrier Loss Disconnect: 1 sec. Disconnect Enable: On/Off. Tone Ringer: On/Off. Force DTR: On/Off **4113B** Abort Timer: 18 sec. Abort Timer: 6 sec. Carrier Loss Disconnect: 1 sec. Disconnect Enable: On/Off. Tone Ringer: On/Off. Force DTR: On/Off. **ADDITIONAL FEATURES:** 4102D: None, 4103B: None, 4103B, 4113B: Built in audio ringer with level adjustment. **TERMINAL INTERFACE:** EIA RS232C Outputs: Mark (Off): −8v, Space (On): +8V Input¢: Mark (Off): −3 to −25V, Space (On): + to +25V, TTY, 20MA active current loop: Mark: 20MA, Space: no current. Pin Connects: (Write for additional specifications) **POWER REQUIREMENTS:** 117VAC +, −10%, 60Hz, 16 W **STANDARD CABLES AND ACCESSORIES:** UL listed wall-mount 24VAC power transformer. Plug-to-plug 6-foot telephone modular cable. **OPTIONAL CABLES:** EIA RS232C 6-foot, 8-wire cable, TTY 6-foot, 4-wire cable, EIA RS232C/TTY Y-cable, Modular T-adapter (connects modem and telephone to phone line) **SIZE:** 12''L, 5⅜''W, 2¼''H **WEIGHT:** 1 Lb. **SHIPPING WEIGHT:** 3 Lbs.

WE ACCEPT VISA, and MASTER-CHARGE

PRIORITY ONE ELECTRONICS

TRS-80* MEMORY EXPANSION KITS

You're busy writing programs. Suddenly, in the middle of a line you run out of memory space!
In the words of a famous San Francisco detective,
"What will you do? What will YOU do?"

Now that you have discovered some of the things your TRS-80 can do for you games, business, education—you want to do more. You want to go beyond the simple program, but when you type in the PRINT MEM command, there is no memory space left. What will you do?*

If you're smart, you will do what thousands of other TRS-80 owners have done. You will dash off an order to Priority 1 Electronics for our 16K Memory Expansion Kits. Don't pay a penny more or settle for anything less. Our Memory Expansion Kits come complete with eight factory prime 16K dynamic RAM chips, easy to follow step-by-step instructions, and a 100% guarantee. What more could you ask for?*

TRS-16KEXP This kit allows you to expand from 16K to 32K or from 32K to 48K in your Expansion Interface **$50.00**

TRS-16KEY This kit includes the programming jumpers necessary to expand from 4K to 16K in your TRS-80* Keyboard **$53.00**

NOTE: Apple owners, this terrible fate can happen to you, too. Order our Apple II** Memory Expansion Kit.

APL-16K **$50.00**

THE PRIORITY 1 ELECTRONICS MEMORY EXPANSION KIT Don't program without it.

*TRS-80 is a registered trademark of Tandy Corp.
**Apple II is a registered trademark of Apple Computer Corp.

MODEL T2400AA

The Mini-8100S is an S-100 size card providing a compact S-100 adapter for the TRS-80™ computer. Designed for those who possess or will possess an S-100 mainframe. It has the same adapter circuitry as the Mini-8100, but plugs exactly into an S-100 motherboard.

Features:
- S-100 Bus Interface
- Fully Socketed
- Solder Mask and Silk Screened Component Legend
- Not Recommended for Use With Expansion Interface

Ordering Information:	List	Our Price
CCS-T2400AA Mini-8100S	$125.00	**$112.61**

MODEL T5400AA

The Mini-8100 opens up the vast world of S-100 products for your TRS-80™ Computer, providing an S-100 Bus adapter/motherboard for memory expansion and extended I/O capabilities. This combination four-slot motherboard and S-100 interface connects to the TRS-80 or expansion interface.

Features:
- S-100 Bus Interface
- 4-Slot Motherboard
- Fully Socketed
- Solder Mask and Silk Screened Component Legend

Ordering Information:	List	Our Price
CCS-T5400AA Mini-8100		
Assembled & Tested	$155.00	**$139.60**

MODEL T5416ABA

The 8100 allows a Radio Shack TRS-80 computer to be interfaced to the popular S-100 Bus for memory expansion and extended I/O capabilities.

The 8100 opens up a whole new world of peripheral devices to the TRS-80 owner. For example, you can now easily add more memory, floppy disc systems, PRCK boards, printer interfaces, multi-purpose I/O boards, AC device controllers, and a whole host of other varied peripherals.

The 8100 has its own built-in 6-slot motherboard which includes our unique card guide system which keeps the boards in their places.

The 8100 is designed to sit on a table top next to your TRS-80 and connects to it via a ribbon cable. A second TRS-80 connector allows other TRS-80 devices to be connected at the same time.

Not only do you get an S-100 bus interface and motherboard, but the 8100 has more on-board options.

Features:
- S-100 Bus Interface
- 6-Slot Motherboard
- Accepts 8, 16K or 4K Dynamic RAMs
- Programmable Baud Rate Selection
- Selectable Even, Odd or No Parity
- †• Serial RS-232-C/20 ma Current Loop
- †• Parallel Input and Output
- Addressable in 4K Blocks Via Dip Switches
- DCE or DTE Jumper Selectable
- 5-, 6-, 7- or 8-Bit Word Length with 1-, 1½- or 2-Stop Bits

Ordering Information:	List	Our Price
CCS-T5416ABA Complete 8100		
Assembled & Tested	$375.00	**$337.00**

NEWDOS/80

A NEW ENHANCED NEWDOS FOR THE TRS-80® MODEL 1 FOR THE 1980s

Apparat Inc. announces the most powerful Disk Operating System for the TRS-80.® It has been designed for the sophisticated user and professional programmer who demands the ultimate in disk operating systems.

NEWDOS/80 is not meant to replace the present version of NEWDOS 2.1 which satisfies most users, but is a carefully planned upward enhancement, which significantly extends NEWDOS 2.1's capabilities. This new member to the Apparat NEWDOS family is upward compatible with present NEWDOS 2.1 and is supplied on Diskette, complete with enhanced NEWDOS+ utility programs and documentation. Some of the NEWDOS/80 features are:
- New BASIC commands that support files with variable record lengths up to 4095 Bytes long.
- Mix or match disk drives. Supports and track count from 18 to 80. Use 35, 40 or 77 track 5'' mini disk drives or 8" disk drives, or any combination
- A security boot-up for BASIC or machine code application programs. User never sees "DOS READY" or "READY" and is unable to "BREAK," clear screen, or issue any direct BASIC statement including "LIST."
- New editing commands that allow program lines to be deleted from one location and moved to another to allow the duplication of a program line with the deletion of the original.
- Enhanced and powerful RENUMBER that allows relocation of subroutines.
- Powerful program chaining, & enhanced debug.
- Device handling for routing to display and printer simultaneously.
- CDE function; simultaneous striking of the C, D and E keys will allow user to enter a mini-DOS to perform some DOS commands without disturbing the resident program.
- Upward compatible with NEWDOS 2.1 and TRSDOS 2.3
- Includes Superzap 3.0 and all Apparat 2.1 utilities.


Shipping weight: 3 lbs.

APP395 ..... **$149.00**
APP395M NEWDOS/80 when purchased with any Micropolis Drive on the same order **$100.00**

NEW FROM SAMS BOOKS NOW IN TWO VOLUMES

TRS-80 INTERFACING

BOOK 1 AND BOOK 2



SHIPPING WEIGHT 1 LB.

INTRODUCTION, BOOK I

The Radio Shack TRS-80 computer provides abundant computer power at moderate cost, allowing broad versatility. Like many TRS-80 users, you, perhaps, are content to apply your computer to home, business, or personal uses where standard peripherals, such as keyboard, display, cassette recorder, etc., are appropriate. Or, maybe, you are like a growing number of others who desire to have their TRS-80 actually control external devices, sense external events, and perhaps, even transfer information between the computer and peripheral circuits of their own design. If you are among the latter group, then TRS-80 interfacing will introduce you to the internally generated signals available and show you how each can be used under BASIC language program control. The book is for the reader with a good understanding of commands in Level II BASIC and would be found midway between the beginning computer user and the advanced programmer/hardware designer. 190 pages.

SAM 21633 ..... **$8.95**

ADVANCED TECHNIQUES, BOOK 2

This book will introduce you to some of the advanced interfacing techniques that will allow you to do real things with your Radio Shack TRS-80 computer. You will find that these techniques can be applied to computer applications in your home, research laboratory, or school laboratory. You will learn how the computer can be used to drive high-current and high-voltage loads, to generate voltage and current signals, and to measure unknown voltages and currents. Since many computers are being used to control devices that are located some distance from the central processing unit, the author has included a chapter on serial communication and remote control. Remote control circuits are provided that allow you to control Universal Asynchronous Receiver/Transmitter (UART) chips, analog-to-digital converters, digital-to-analog converters, and other devices that can be located from several feet from the computer to several thousand feet from it.

SAM 21739 ..... **$9.95**




MICROPOLIS DISK DRIVES FOR THE TRS-80 COMPUTER

- Plug-In Compatible with the TRS-80 Disk Drive
- 35 Tracks
- Faster Than a Speeding Bullet (30ms)
- Available in 77 Track
- Soft Sector
- Metallic Gray and Black Cabinet
- Power Supply, Fuse, and Line Cord
- Single- or Dual-Drive Configuration

		LIST PRICE	OUR PRICE
SINGLE DRIVES			
MCP 10271	35 TRACK	$ 545.00	CALL
MCP 10272	77 TRACK	$ 645.00	**$ 575.00**
DUAL DRIVES			
MCP 10371	35 TRACK	$1195.00	CALL
MCP 10372	77 TRACK	$1395.00	**$1195.00**

AS FEATURED IN TRS-80 INTERFACING



Interface your TRS-80 to the "real world" the faster and easier way.


The Jumper. A 24" 40-conductor flat ribbon cable assembly with a socket connector on one end, a card-edge connector on the other. It's preassembled and every line is pretested.

APP-924150-24 ..... **$11.95**



The Header. Copper alloy 770 for instant plug-in access to the PC board.

APP-923875-R **$3.49**



The Solderless Breadboard. It's our famous "superstrip" for unlimited freedom in the layout and implementation of your circuits.

APP-923252-R **$17.00**

THE VISTA V-80 DISK DRIVE SYSTEM



- 23% more storage capacity than TRS-80
- 120 day warranty
- 40 track patch at NO CHARGE

THE VISTA V80:

widen the ability of your TRS-80

The Vista V80 Mini Disk System is the perfect way to widen the capabilities of your TRS-80™ Micro-computer. Quickly and inexpensively. Our $395 price tag is about $100 less than the Radio Shack equivalent. Our delivery time is immediate. And our system is fully interchangeable. That's just the start.

It will give you 23% more storage capacity by increasing useable storage from 55,000 to 65,000 bytes per drive with our new software patch.

It can work 8 times faster than the TRS-80 Mini-Disk system, because track-to-track access is 5ms versus 40ms for the TRS-80. You can realize this added speed once the new double disk expansion interface is available without expensive modification of the existing unit.

It has a better warranty than any comparable unit warranty available—a full 120 days on all parts and service. When you consider how much more goes into the Vista V80, that shows a lot of faith in our product.

A full 3 amp power supply means you have 2½ times the power necessary to operate the V80, and full ventilation insures that there will be no problems due to overheating.

The Vista V80 Mini Disk System requires Level II Basic with 16K RAM Expansion Interface (it operates from the Radio Shack interface system). It comes complete with a dependable MPI Minifloppy disk drive, power supply, regulator board and vented case. It's shipped to you ready to run—simply take it out of the box and plug it in. You're in business. From the company that means business—Vista Computer Company.

DISKETTES


Part No.	Sectoring	Application	Box of 10
VRB-MD 525-01	Soft Sector	TRS-80, Apple	$ 29.95

VIS-V-80 Single drive system **$395.00**
VIS-V-80-2 Two drive system **$770.00**
VIS-V-80-4 Four drive system **$1450.00**
PRI-34CEEE-2 Two drive cable **$29.95**
PRI-34CEEE-4 Four drive cable **$39.95**

Four Drive and Two Drive Systems come complete with Data Cable.

WE ACCEPT VISA, and MASTER-CHARGE

APPLE PERIPHERALS



PARALLEL INTERFACE

- Two bi-direction 8 bit buses for interface to periferals
- Two programmable control registers
- Two programmable data direction registers
- Four individually controlled interrupt input lines; two useable as peripheral control outputs
- Handshake control logic for input and output peripheral operation
- High impedance 3 state and direct transistor drive peripheral lines
- Programmable interrupts
- CMOS drive capability on side A peripheral lines
- 2 TTL drive capability on all A and B side buffers
- Power down ROM
- Supports interrupt daisy chain
- Allows DMA daisy chain
- 256 bytes firmware (ROM) or softwares (RAM) space available

	List	Our Price
CCS-7720A Assembled (with cable and Software) 1 LB.	$119.95	**$107.95**
CCS-7325A Cable Assembly, 25 P "D"" to dual 13P header		**$24.95**
CCS-7620A A Firmware ROM, General purpose		**$24.95**

CENTRONICS PARALLEL INTERFACE

The Model 7728 interfaces high-speed Centronics-type parallel interface printers to the Apple II* computer. The 7728 provides eight-bit parallel data output bus, four-bit status input, Data Strobe and Acknowledge handshake signals, and printer Reset signal to ensure compatibility with a wide selection of printers.

Driver firmware is provided in an on-board 256-byte ROM.

- Pin-for-pin compatibility with Centronics printers
- Handshaking provided with Data Strobe and Acknowledge signals
- ASCII character output controlled by on-board ROM
- Eight-bit parallel output bus
- Four-bit status input
- Printer Reset signal
- Compatibility with standard Apple II printer command
- Flexible character/line format
- Auto line feed and video echo are under software control
- Interrupt daisy chain supported with arbitration logic
- DMA daisy chain pass-through provided
- Software-programmable interrupts
- Jumper-selectable IRQ signal
- Berg plug jumpers provided for all jumper-selectable features

	List	Our Price
CCS7728 Assembled	$119.95	**$107.95**
CCS-7340A Cable for the Integral Data IDS-440 Paper Tiger		**Call**
CCS-7379A Cable for Centronics printers, the Okidata Microline 80, or the Microtek MT-88T		**$31.95**
CCS-7388A Cable for the MPI 88T		**$29.95**
CCS-7001A RAM pack for ROM replacement		**$19.95**
CCS-7601A Unburned ROM pack		**$19.95**

SYNCHRONOUS SERIAL INTERFACE


- Conforms to RS-232-C (configuration A thru E)
- Supports half or full duplex operation
- DTE type configuration
- Failsafe RS-232-C operation
- 14 STD CLK rates 50-19.2K BAUD plus EXT CLK
- BAUD rates dip switch selectable
- All BAUD rates crystal controlled
- Programmable interrupts from transmitter, receiver, and error detection logic
- Programmable SYNC code register
- Standard synchronous signaling rate per RS-269/ANSI X3.1-1975
- Peripheral/modem control functions
- Three bytes of fifo buffering on both transmit and receive date
- 7, 8, or 9 bit transmission
- Optional odd, even, or no parity bit
- Parity, overrun, and overflow status checks
- Power down prom
- 256 bytes firmware (ROM) or software (RAM) space available
- Supports interrupt daisy chain
- Allows DMA daisy chain

	List	Our Price
CCS-7712A Assembled (with cable & software) 1 LB.	$179.95	**$159.00**
CCS-7325A Cable Assembly, 25P "D" to dual BP header		**$24.95**
CCS-7001A RAM (for ROM replacement)		**$19.95**
CCS-7601A ROM (unburned, empty)		**$19.95**
CCS-7610A Firmware ROM General Purpose		**$24.95**

APPLE II® EXTENDER BOARD

A handy tool when debugging or testing modules in the APPLE II® computer.

CCS-7520A Assembled **$24.95**



ARITHMETIC PROCESSOR

- Based on AMD AM9511 device
- Fixed point 16 and 32 bit operation
- Floating point 32 bit operation
- Binary data formats
- Add, subtract, multiply, and divide
- Trigonometric and inverse trignometric functions
- Square roots, logarithms, exponentiation
- Float to fixed and fixed to float conversions
- Stack oriented operand storage
- Programmed I/O data transfer
- End signal selectable interrupt
- Supports interrupt daisy chain
- Allows DMA daisy chain
- Powered down ROM
- 256 Bytes firmware (ROM or software (RAM) space available

	List	Our Price
CCS-7811B For use with Apple II	$399.95	**$359.00**
CCS-7001A RAM (for ROM replacement)		**$19.95**
CCS-7601A ROM (unburned, empty)		**$19.95**
CCS-7811C For use with Apple II plus		**$359.00**

ASYNCHRONOUS SERIAL INTERFACE

- Parity, overrun, and framing error checks
- Optional divide by 16 clock mode
- False start bit detection
- Software programmable interrupts
- Data double buffered
- One or two stop bit operation
- Power down PROM
- 256 bytes firmware (ROM) or software (RAM) space available
- Supports interrupt daisy chain
- Allows DMA daisy chain
- 134.5 BAUD available for selectric interface
- Conforms to RS-232-C (configuration A thru E)
- Supports half or full duplex operation
- DCR type interface
- Failsafe RS-232-C operation
- 14 STD CLK rates 50-19.2K BAUD plus EXT CLK
- BAUD rates dip switch selectable
- All BAUD rates crystal controlled except EXT
- 8 and 9 bit transmission
- Optional even, odd, and no parity bit
- Programmable control register

	List	Our Price
CCS-7710A Assembled (with cable & software) 1 LB	$159.95	**$159.00**
CCS-7325A Cable assembly, 25P "D" to dual 13P header		**$24.95**
CCS-7001A RAM (for ROM replacement)		**$19.95**
CCS-7601 ROM (unburned, empty)		**$19.95**
CCS-7610A Firmware ROM General Purpose		**$24.95**

GPIB INTERFACE

With the Model 7490 General Purpose Instrument Bus Interface, your Apple II® computer can operate with instruments which fall under the IEEE 488-1978 communication bus standards. Up to fifteen inter-connected controllers, talkers, and/or listeners can be interfaced on the bus. Such devices include counters, signal generators, digital multimeters, and color graphics output devices.


- Controller/talker/listener functions of IEEE 488 standards implemented
- Capability of handling up to 15 interconnected devices on the bus
- Five bus management lines and three data-byte-transfer lines provided
- Full buffering of all 16 signal lines
- Bi-directional 8-bit data bus
- An on-board parallel interface adapter which contains control, data direction, and data output registers for reliable operation
- Data transferring performed asynchronously
- Full handshaking with peripherals
- DMA daisy chain pass-through support
- Allowance for interrupt daisy chain
- Software-programmable interrupts
- Operation in a paging mode with eight 256-byte pages of firmware
- Controller firmware stored in a 2K x 8-bit EPROM (preprogrammed at the factory)
- 3 foot GPIB-compatible cable provided

	List	Our Price
CCS-7490A Assembled	$300.00	**$269.00**

APPLE MEMORY EXPANSION KITS 4116's RAMS

from Leading Manufacturers. 1,000's of sets sold! 100% guaranteed. (16K x 1 200/250ns)

APL-16K **8 for $50.00**



PROGRAMMABLE TIMER MODULE

- Flexible external interface patch area for custom interface applications
- Selectable prescaler on timer 3 capable of 4mhz input
- Programmable interrupts
- Readable down counter indicates counts to go to time-out
- Selectable gating for frequency or pulse width comparison
- Three asynchronous external clock and gate/trigger inputs internally synchronized
- Three maskable outputs to patch area
- Power down ROM
- Supports interrupt daisy chain
- Allows DMA daisy chain
- 256 byte firmware (ROM) or software (RAM) space available

	List	Our Price
CCS-7440A Assembled 1 LB	$114.95	**$103.00**
CCS-7001A RAM (for ROM replacement)		**$19.95**
CCS-7601A ROM (Unburned, empty)		**$19.95**

PROM MODULE

The 7114A PROM MODULE permits the addition or replacement of the Apple II firmware without the physical removal of the Apple II ROMS. This allows software/firmware replacement, change, and/or patch to be made on a ROM or BYTE BASIS. An on-board enable/disable toggle switch is also availale.

- BYTE oriented program overlay
- Selectable prom overlay
- Power down of PROMS
- 14K PROM space available
- Uses +5 volt 2716 type proms
- Allows use of DMA/interrupt daisy chains

	List	Our Price
CCS-7114A Assembled (without PROMS) 1 LB.	$79.95	**$75.00**

3¾ DIGIT BCD A/D CONVERTER

The 7470 allows conversion of a DC voltage to a BCD number for computer monitoring and analysis. Typical inputs would be DC inputs from temperature or pressure transducers.

- Selectable interrupt on end of conversion
- 200US per conversion
- -4 to +4 VDC full scale
- Plus or minus .05% non-linearity
- Plus or minus 1 count quantization
- Correctible offset error
- Temperature coefficient adjustment
- Calibration adjustment
- Input offset adjustment
- Floating inputs
- Overange and sign indicators
- Input filter
- Power down ROM
- Supports interrupt daisy chain
- Allows DMA daisy chain
- 256 byte firmware (ROM) or software (RAM) space available

	List	Our Price
CCS-7470A Assembled and Calibrated 1 LB.	$111.95	**$99.95**
CCS-7001A RAM $19.95 ..... CCS-7601 ROM $19.95		

CALENDAR/ CLOCK MODULE

The Model 7424 Calendar/Clock Module for the Apple II* computer provides accurate real time counting for a wide variety of applications. The 7424 can be software-programmed for either a 12-hour or 24-hour format, and automatically adjusts February to 29 days for leap years. Each decimal digit of data is separately addressed, allowing the user complete freedom of data format. An optional back-up battery maintains accurate time counting when the Apple is powered down or during power outages. To prevent accidental setting of the clock, the time-setting signal to the clock can be jumper-disabled.

- MSM5832 Clock to count seconds, minutes, hours, days of week and month, months, and years
- Berg plug jumpers provided for all user-selected features
- Optional back-up battery provided for maintaining time during power-down of the Apple or during power outage
- 12 hour or 24 hour format
- Automatic adjustment of February to 29 days for leap years
- Jumper-enabled time setting to prevent accidental timing setting
- BASIC program listing provided for setting time, day, month, and year
- Interrupt daisy chain arbitration
- DMA daisy chain pass-through
- Jumper-selectable IRQ generation at hour, minute, second, or millisecond intervals
- Low-power Schottky devices
- Jumper-selectable 256-byte ROM or RAM logic
- 3 jumper-selectable CCS drivers and space for user-burned driver on 1K EPROM

	List	Our Price
CCS-7424A Assembled	$125.00	**$109.95**

3M Scotch® BRAND

If it's worth remembering, it's worth Scotch Data Recording Products.



DISKETTES

Part No.	Sides/ Density	Sectoring	List Price Box of 10	Price Box of 10
		8"		
MMM-740-OP	1/single	Soft-IBM	$50.00	$39.95
MMM-740/2-OP	2/single	Soft-IBM	$88.00	$75.00
MMM-740-32P	1/single	32-Shugart 801	$50.00	$39.95
MMM-740/2-32P	2/single	32-Shugart 801	$88.00	$75.00
MMM-741-0	1/double	Soft-Shugart Dbl	$70.00	$59.00
MMM-743-0	2/double (2 head)	Soft-IBM	$100.00	$88.00
		5"		
MMM-744-OK	1/single	Soft-Shugart SA400 (TRS-80)	$50.00	$39.95
MMM-744-10K	1/single	Soft/10 SA400	$50.00	$39.95
MMM-744-16K	1/single	Soft/16 Micropolis	$50.00	$39.95

BE SURE TO ORDER YOUR KASSETTE/10 LIBRARY CASE BELOW



Verbatim

Removable magnetic storage media

5¼ DISKETTES

Part No.	Sectoring	Application	# of Heads	Box of 10
VRB-MD 525-01	Soft Sector	TRS-80 Apple	1	$29.95
VRB-MD 525-10	Hard 10 Sector	North Star	1	$29.95
VRB-MD 525-16	Hard 16 Sector	Micropolis	1	$29.95
VRB-MD 540-01	Soft Sector	40 Track Cert.	1	$38.95
VRB-MD 540-10	Hard 10 Sector	40 Track Cert.	1	$38.95
VRB-MD 540-16	Hard 16 Sector	40 Track Cert.	1	$38.95
VRB-MD 550-01	Soft Sector	40 Track Cert.	2	$55.00
VRB-MD 550-10	Hard 10 Sector	40 Track Cert.	2	$55.00
VRB-MD 550-16	Hard 16 Sector	40 Track Cert.	2	$55.00
VRB-MD 577-01	Soft Sector	77 Track Cert.	1	$48.00
VRB-MD 577-10	Hard 10 Sector	77 Track Cert.	1	$48.00
VRB-MD 577-16	Hard 16 Sector	77 Track Cert	1	$48.00

VRB-MD 577 Series comes with reinforced hub ring mounted.

8" DISKETTES

VRB-FD32-1000	Hard Sector	Shugart 801R	1	$37.00
VRB-FD34-1000	Soft Sector	IBM 3740	1	$37.00
VRB-FD32-2000	Hard Sector	Flippy	1	$66.00
VRB-FD34-2000	Soft Sector	Flippy	1	$66.00

ALL VERBATIM DISKETTES ARE DOUBLE DENSITY CERTIFIED

HOUSINGS FOR MAGNETIC MEDIA



- Capacity: 50 diskettes
- Vinyl dust cover
- 5 pressboard dividers
- 3 metal dividers
- Will cross-file in a standard letter-size file drawer

P.E.C.

Shipping weight: **MM-1 5 lbs.** **FM-2 9 lbs.**

MMM-MM1	(for 5¼" diskettes)	$28.50
MMM-FM-2	(for 8" diskettes)	$37.00



THE PROTECTOR.

- Capacity: 50 Diskettes
- Sizes for 8" and 5¼" Diskettes
- Rugged, smoked plexiglass construction
- Helps keep dust, dirt and grime from contaminating valuable diskettes

Shipping Weight: **VRBPRT5** 3 lbs. **VRBPRT8 5 lbs.**

Part Number	Description	Price
VRB-PRT5	For 5¼" Diskettes	$29.95
VRB-PRT8	For 8"	$39.95

DON'T LET DUST OR SCRATCHES DIRTY YOUR DATA!

3M CRASHGUARD 14" HARD DISKS

SOMETHING YOU CAN DEPEND ON

Each "Scotch" brand top loading and front loading cartridge is coated with CRASHGUARD®—3M's exclusive protective disk coating which guards against oxide build-up on the read/write heads and the hazards of head-to-disk interference. You can depend on CRASHGUARD to protect you from data checks (phantom errors), damaged heads, computer downtime and data loss.

Shipping weight: 10 lbs

Part No.	Sectoring	Application	Price
MMM-910-12	12 Sector	DEC PDP-11	$100.00
MMM-910-16	16 Sector	DEC PDP-8	$100.00
MMM-910-24	24 Sector	TI 980	$100.00
MMM-920-12	12 Sector	CDC HAWK	$120.00
MMM-920-24	24 Sector	Microdata 2754	$120.00
MMM-9331-48	48 Sector	Datapoint 10/MB	$160.00

PREVENT THE USE OF DAMAGED DISK CARTRIDGES WITH SHOCKWATCH

Media equipped with Shockwatch give an immediate signal that a shock great enough to cause a malfunction has been experienced.

The dramatic change from clear to vivid red attracts the attention of all operating personnel and assures its removal from service **before** significant financial loss.

The Shockwatch impact detector is a length of precision-bore capillary tubing, containing a precise thread of red liquid. Mechanical shock or acceleration exceeding a predetermined level disrupts the relationship between the liquid and the tube. Immediately, vivid red liquid fills the tube. This simple change in appearance, from clear to brilliant red, is a positive indicator that the cartridge or pack has received a shock sufficient to cause probable damage.

MMM-SWCART **$8.95**

Shipping weight: 1 lb.


HARDHOLE HUB REINFORCING DISK PROTECTORS

- Protects disks and diskettes from wear!
- Repairs damaged disks!

Now you can save those "ruined" disks with simple insertion of our DISK PROTECTOR! Inserting a protector on a new disk will increase its life times over! Easy to install, just slip a protector ring onto the precision tool, then slip on the disk! No glueing, no drying time, no heat! One tool lasts indefinitly, each disk requires one protector ring.

Part No.	Description	Price
VRB HDHL5	5¼" Diskette Protector Ring (pkg. 50)	$3.50
VRB HDHL5A	5¼" Applicator Tool	$5.00
VRB HDHL8	8" Diskette Protector Rings (pkg. 50)	$7.00
VRD HDHL8A	8" Applicator Tool	$10.00

Shipping Weight: 4 oz.




KASETTE/10 LIBRARY CASE

Shipping Weight: 8" 2 lbs. 5¼" 1 lb.

Part Number	Size	Color	Price
MMM-KS10GY	8"	Grey	$4.50
MMM-KS10BK	8"	Black	$4.50
MMM-KS10BU	8"	Blue	$4.50
MMM-KS10BG	8"	Beige	$4.50
MMM-KM10GY	5¼"	Grey	$4.25
MMM-KM10BK	5¼"	Black	$4.25
MMM-KM10BU	5¼"	Blue	$4.25
MMM-KM10BG	5¼"	Beige	$4.25

PREVENT HEAD CRASHES

A one year supply of disk cleaning supplies cost $29.95—What is a diskette with one of your programs worth?



Diskette drive heads, like your cassette heads, need periodic mantenance to assure efficient and error-free operation. Unlike other peripheral devices, the read/write head(s) on diskette drives are extremely difficult to clean without partially disassembling the drive. The unique concept of the diskette head cleaning kit allows the user to clean the drive heads without diassembly in just minutes. Available for 8" or 5¼", both single and double sided disk drives. Kit contains 2 cleaning diskettes, a 4 oz. bottle of CS-85 cleaning solution and easy-pour dispenser. Wt. 12 oz. A 1 year supply if you clean your disk once a week.

Catalog No.	Description
VRB-FD08	8" Disk Drive Cleaning Kit $29.95
VRB-FD05	5¼" Disk Drive Cleaning Kit $29.95



3M SCOTCH® BRAND PERSONAL COMPUTING TAPE WITH LEADER

MMM-PCC-10	10 Minute	$1.30
MMM-PCC-20	20 Minute	$1.40
MMM-PCC-30	30 Minute	$1.50

PRIORITY ONE ELECTRONICS

MICROCOMPUTER PRODUCTS

8080 SERIES

PART NO.	DESCRIPTION	PRICE
INS 808AN	8 BIT CPU	$6.50
DP8212N	8 BIT I/O PORT	$2.95
DP8214N	PRIORITY INTERUPT CONTROL	$5.25
DP8216N	BI-DIRECTIONAL BUS DRIVER	$2.95
DP8224N	CLOCK GEN AND DRIVER (2MHz)	$3.25
DP8224-4N	CLOCK GEN AND DRIVER (4MHz)	$9.95
DP8226N	INV BI-DIRECTIONAL BUS DRIVER	$3.50
DP8228N	SYSTEM CONTROLLER & BUS DRIVER	$5.55
DP8238N	SYSTEM CONTROLLER & BUS DRIVER	$5.55
INS8250N	ASYNCH COMM ELEMENT	$15.00
INS8251N	PROGRAMMABLE COMM INT.	$7.50
INS8253N	PROGRAMMABLE INTERNAL TIMER	$17.95
INS8255N	PROG. PERIPHERAL INTERFACE	$6.80
INS8257N	PROG. DMA CONTROLLER	$16.45
INS8259N	PROG. INTERUPT CONTROLLER	$18.00

Z80 SERIES

PART NO.	DESCRIPTION	PRICE
Z80A	8 BIT CPU (4MHz)	$14.95
Z80PIO	PARALLEL INTERFACE (2.5MHz)	$9.95
Z80APIO	PARALLEL INTERFACE (4MHz)	$14.95
Z80CTC	CTC (2MHz)	$9.95
Z80ACTC	CTC (4MHz)	$13.95
Z80DMA	DMA CONTROLLER (2MHz)	$39.95
Z80ADMA	DMA CONTROLLER (4MHz)	$45.00
Z80SIO0	SERIAL INTERFACE (2MHz)	$56.00
Z80ASIO0	SERIAL INTERFACE (4MHz)	$59.95
Z80SIO1	SERIAL INTERFACE (2MHz)	$56.00
Z80ASIO1	SERIAL INTERFACE (4MHz)	$59.95
Z80SIO2	SERIAL INTERFACE (2MHz)	$56.00
Z80ASIO2	SERIAL INTERFACE (4MHz)	$59.95

6502 SERIES

PART NO.	DESCRIPTION	PRICE
6502	8 BIT CPU	$12.95
6502A	8 BIT CPU	$18.95
6520	PIA	$8.95
6522	PIA	$10.95
6530-002	RAM/ROM I/O TIMER	$21.95
6530-003	RAM/ROM I/O TIMER	$21.95
6530-004	TIM, RAM/ROM	$21.95
6530-005	RAM/ROM I/O TIMER	$21.95
6532M	RAM/ROM I/O TIMER	$21.95
6551M		$21.95

6800 SERIES

PART NO.	DESCRIPTION	PRICE
MC6800P	8 BIT CPU	$11.95
MC6802P	MPU, CLK, RAM	$17.95
MC6808P	MPU, CLK	$9.95
MC6809P	MICROPROCESSOR	$34.95
MC6821P	PIA	$5.95
MC6828P	PRIOR. INTERUPT ADAPT.	$14.95
MC6840P	PTM	$14.95
MC6845P	CRT CONTROLLER	$31.00
MC6847P	COLOR VIDEO DISPLAY GEN.	$14.95
MC6850P	ASYNCH. COMM. INT. ADAPT.	$5.41
MC6852P	SYNCH. SER. DATA ADAPT.	$5.79
MC6854P	ADVANCED DATA LINK CONT.	$24.95
MC6860P	0-600 BPS MODEM	$10.89
MC6862P	0-2400 BPS MODEM	$12.00
MC6875L	MPU CLOCK GEN.	$7.40
MC66710P	CHAR. GEN ASCII SHFTD W/GRK	$12.50
MC66750P	CHAR. GEN ALPHA, NUM, CTRL CHAR.	$12.50

MOTOROLA, Semiconductors BOOKS AND LITERATURE

STOCK NUMBER	TITLE	PRICE
MOT-B0412	CMOS	$5.95
MOT-B0421	VOLT REG.	$3.95
MOT-B0422	LO POWER SCHOTTKY	$3.95
MOT-B0427	M6800 REF. MANUAL	$3.95
MOT-B0428	UNDERSTAND MICRO	$3.95
MOT-B0435	POWER DATA	$6.50
MOT-B0436	MICRO DATA LIB	$8.95
MOT-B0437	BASIC MICRO AND THE M6800	$15.95
MOT-B0438	PROG. THE M6800 MICRO	$8.95
MOT-B0439	BASIC I/C ENGR. AND THE 6800	$29.95
MOT-B0440	LINEAR INTERFACE	$5.95
MOT-B0441	LINEAR CIRCUIT	$6.50
MOT-CTG12	MASTER SEL. GUIDE	$3.95

OPTO-ISOLATORS

	TYPE	VISO	ICO(MA)	VCEO	1-24	25-99
4N27	NPN	1500V	2.0	30V	*$1.10*	*$ .92*
4N28	NPN	500V	2.0	30V	*$1.10*	*$ .92*
4N30	NDL	1500V	30	30V	*$1.40*	*$1.10*
4N31	NDL	1500V	10	30V	*$1.25*	*$1.00*

MOTOROLA Semiconductors

STATIC RAMS

PART NO.	DESCRIPTION	1-7	8-24	25-99	100+
2102AN-L	1024 x 1 450NS LP	$1.60	$1.40	$1.15	$1.00
2102AN-2L	1024 x 1 250NS LP	$1.75	$1.60	$1.25	$1.10
2114N-3L	1024 x 4 300NS LP	$6.95	$5.65	$5.00	$4.50
5257N-3L	4096 x 1 300NS LP	$9.50	$6.90	CALL	CALL
7489	16 x 4 60NS TTL	$2.99	$	$2.25	$1.75

DYNAMIC RAMS

PART NO.	DESCRIPTION	1-7	8-24	25-99	100+
4116AC20	16K x 1 200NS	$7.95	$6.25	$	$5.20
	CALL FOR VOLUME PRICING ON 4116 DYNAMIC RAMS				
5290J-2	16K x 1 150NS (4116)	CALL	CALL	CALL	CALL

E PROMS

PART NO.	DESCRIPTION	1-7	8-24	25-99
1702A	256 x 1US UV ERASABLE	$ 6.95	$ 6.00	CALL
2708	1024 x 8 450NS UV ERASABLE	$ 9.00	$ 8.50	CALL
TMS2716	3 SUPPLY 2K x 8 EPROM	$19.95	CALL	CALL
2716	5V ONLY 2K x 8 EPROM	$20.00	$18.00	$15.00
2732	5V ONLY 4K x 8 EPROM	CALL	CALL	CALL

BUS DRIVERS & RECEIVERS

PART NO.	DESCRIPTION	PRICE
8T26N	QUAD BUS DRV/RCVR EXT	$2.75
8T28N	QUAD 3 STATE BUS DRV/RCVR	$2.75
8T96N	HEX INVERTER TRI-STATE	$1.95
8T97N	HEX BUFFER TRI-STATE	$1.95
8T98N	HEX INVERTER TRI-STATE	$1.95
8131N	QUAD TRI-STATE LINE RECEIVER	$3.00
MC1488P	RS232 QUAD LINE DRIVER	$1.18
MC1489P	RS232 QUAD LINE RECEIVER	$1.18

UARTS


PART NO.	DESCRIPTION	PRICE
AY51013A	UART 30K BAUD (–12V +5V)	$5.95
TR1602B	UART 20K BAUD (–12V +5V)	$5.95

MEK6800 MICROCOMPUTER MODULES

PART NO.	DESCRIPTION	PRICE
MEK6809D4A	6809 MPU BOARD, CASS INT, 1K RAM, DEBUG MONITOR (MOKEP)	$490.00
MEK6809D4B	SAME AS ABOVE, WITH ADDR & DATA BUFFERS AND RS-232 INTERFACE	$528.00
MEK68KPD	KEYPAD/DISPLAY WITH PWR. SUPPLY FOR MEK6809D4A	$275.00
MEK6802D5	6802 SBC, 25 KEY KEYPAD, 2K MONITOR WITH DEBUG, PWR SUPPLY	$305.00
MEK68IOE	I/O MODULE, CASS INT., RS-232C INT, DIA PORT (MOKEP)	$325.00
MEK68RRE	RAM/ROM MODULE, 1K RAM EXPAN. TO 8K, EDITOR/ASSEMBLER ON ROM (MOKEP)	$469.00
MEK6800ABC	ADAPTER/MOTHERBOARD FOR MEK6800 D2 AND MOKEP PRODUCTS	$215.00
MEK6809EAC	EDITOR/ASSEMBLER FOR THE MEK6809EAC (CASS. 300 BAUD)	$110.00
MEK6800D2A	6800 EVALUATION KIT II, PIA I/O, CASS INT, 256 BIT RAM	$409.00
MEK6802D3	6802 SBC HEX KEYPAD, PARALLEL I/O, MONITOR, 16 BIT TIMER COUNTER	$305.00
MEK6802D3C	SAME AS ABOVE WITHOUT KEYPAD & LED DISPLAYS (MOKEP)	$269.00
MEK68IO	SAME AS MEK68IO LESS RS-232 DRIVER ROM	$305.00
MEK6800AB	SAME AS MEK6800ABC LESS EDITOR/ASSEM CASSETTE	$169.00
MEK68MB5	MOTHERBOARD FOR MOKEP PRODUCTS	$139.00
MEK68MM16	16K RAM FOR THE MOKEP FAMILY	$359.00
MEK68MM32	32K RAM FOR THE MOKEP FAMILY	$479.00
MEK68R2	PROGRAMMABLE CRT INTERFACE FOR THE MEK6800AB (MOKEP)	$359.00
MEK68R2M	PROGRAMMABLE CRT INTERFACE FOR THE MEK6802D3	$359.00
MEK68CC	CARD CAGE FOR THE MEK68MB5 MOTHERBOARD	$ 85.00
MEK68RR	SAME AS MEK68RRE LESS EDITOR ASSEMBLER ON ROM	$359.00
MEK68WW	WIRE WRAP MODULE FOR THE MEK6800AB	$ 69.00
MEK68WW01	WIRE WRAP MODULE FOR THE MEK68MB	$ 69.00
MEK68EP	EPROM PROGRAMMER FOR THE MOKEP FAMILY	$419.00
MEK68CMB	10 SLOT MOTHERBOARD AND CARD CAGE FOR THE MOKEP FAMILY	$209.00
CHROMA68	6808 SBC WITH COLOR GRAPHICS	$149.00

SPST DIP SWITCHES

PART NO.	NO. OF POSITIONS	PRICE 1-9	PRICE 10-24	PRICE 25-99
DIP-SW4	4	$1.50	$1.40	$1.28
DIP-SW5	5	$1.60	$1.49	$1.36
DIP-SW6	6	$1.70	$1.59	$1.45
DIP-SW7	7	$1.80	$1.68	$1.53
DIP-SW8	8	$2.00	$1.86	$1.70
DIP-SW9	9	$2.25	$2.10	$1.92
DIP-SW10	10	$2.50	$2.33	$2.12



CALL FOR QUANTITY PRICING

PRIORITY ONE ELECTRONICS

74LS TTL

PART #	DESCRIPTION	PRICE
74LS00	QUAD 2-IN NAND GATE	$ .40
74LS01	QUAD 2-IN NAND GATE (OC)	.40
74LS02	QUAD 2-IN NOR GATE (OC)	.40
74LS03	QUAD 2-IN NAND GATE (OC)	.40
74LS04	HEX INV	.42
74LS05	HEX INV	.42
74LS08	QUAD 2-IN AND GATE	.40
74LS09	QUAD 2-IN NAND GATE (OC)	.40
74LS10	TRIP 3-IN NAND	.40
74LS11	TRIP 3-IN AND	.42
74LS12	TRIP 3-IN NAND GATE (OC)	.42
74LS13	DUAL SCHMITT TRIG	.78
74LS14	HEX SCHMITT TRIG	2.20
74LS15	TRIP 3-IN NAND	.42
74LS20	DUAL 4-IN NAND GATE	.40
74LS21	DUAL 4-IN NAND GATE	.40
74LS22	DUAL 4-IN NAND GATE (OC)	.40
74LS26	QUAD 2-IN NAND GATE (HV)	.42
74LS27	TRIP 3-IN NOR GATE	.42
74LS30	SNGL 8-IN NAND GATE	.40
74LS32	QUAD 2-IN OR GATE	.46
74LS37	QUAD 2-IN NAND BUFF	.46
74LS38	QUAD 2-IN NAND BUFF (OC)	.46
74LS40	DUAL 4-IN NAND BUFF	.42
74LS42	BCD-DECIMAL DECODER/DRIVER	.92
74LS47	BCD-7 SEGMT DECODER/DRIVER	1.78
74LS48	BCD-7 SEGMT DECODER/DRIVER	1.78
74LS49	BCD-7 SEGMT DECODER/DRIVER	1.78
74LS51	QUAD 2-IN AND-OR-INV GATE	.40
74LS54	QUAD 2-IN AND-OR-INV GATE	.40
74LS55	DUAL 4-IN AND-OR-INV GATE	.40
74LS73	DUAL J-F F/F W/PRESET + CLR	.60
74LS74	DUAL "D" F/F	.58
74LS75	QUAD LATCH	.82
74LS76	DUAL J-K F/F W/PRESET + CLR	.62

74LS TTL

PART #	DESCRIPTION	PRICE
74LS78	DUAL J-F F/F W/PRESET, COMM CLK + CLR	$ .63
74LS83	4-BIT FULL ADD	1.37
74LS85	4-BIT MAG COMP	1.58
74LS86	QUAD EX-OR GATE	.58
74LS90	BINARY COUNTER	.95
74LS93	BINARY COUNTER	.95
74LS107	DUAL J-K F/F W/CORNER PWR PINS	.62
74LS109	DUAL J-K F/F POS EDGE	.60
74LS112	DUAL J-K F/F NEG EDGE	.62
74LS113	DUAL J-K F/F NEG EDGE	.62
74LS114	DUAL J-K F/F NEG EDGE	.62
74LS122	RETRIGGERABLE MON MULTIVIBRATOR	1.55
74LS123	DUAL RETRIG. MONO. MULTIVIBRATOR	1.70
74LS125	QUAD BUFF (TS)	.74
74LS126	QUAD BUFF (TS)	.74
74LS132	QUAD SCHMITT TRIG	1.20
74LS136	QUAD EX-OR GATE	.69
74LS138	EXP. SNGL 3/8 DECODER	.95
74LS139	EXP. DUAL 2/4 DECODER	.95
74LS151	SNGL 8-1 MUX	.84
74LS153	DUAL 4-1 MUX	.84
74LS154	SNGL 4-16 DECODER	2.10
74LS155	DUAL 2-4 DEMUX	1.55
74LS156	DUAL 2-4 DEMUX (OC)	1.55
74LS157	QUAD 2-1 MUX	.84
74LS158	QUAD 2-1 MUX (INV OUT)	.95
74LS160	PRESET DECADE CTR	2.20
74LS161	PRESET BINARY CTR	1.20
74LS162	PRESET DECADE CTR (SYN CLR)	2.20
74LS163	PRESET DECADE CTR (SYN CLR)	1.20
74LS164	8-BIT S/R	2.20
74LS168	SYN DECADE U/D CTR	3.75
74LS169	SYN BINARY U/D CTR	3.75
74LS170	4x4 REG FILE	3.15

74LS TTL

PART #	DESCRIPTION	PRICE
74LS173	QUAD "D" REG (TS)	$1.89
74LS174	HEX "D" F/F	2.05
74LS175	QUAD "D" F/F	1.95
74LS190	U/D DECADE CTR	1.20
74LS191	U/D BINARY CTR	1.43
74LS192	U/D DECADE BINARY	3.05
74LS193	U/D BINARY CTR	3.05
74LS196	PRESET DECADE CTR	1.98
74LS197	PRESET BINARY CTR	1.98
74LS221	DUAL MONO. MULTIVIBRATOR (SCH TRG)	1.70
74LS240	OCTAL INV BUS/LINE DRVR	2.81
74LS241	OCTAL BUS/LINE DRVR	2.81
74LS242	QUAD BUS TRSCVR/INV	2.81
74LS243	QUAD BUS TRSCVR	2.81
74LS244	OCTAL 3 STAT DRVR	2.81
74LS245	OCTAL BUS TRSCVR	2.53
74LS247	BCD-7 SEGMT DECODER/DRIVER	1.68
74LS253	DUAL 4-IN MUX (TS)	1.85
74LS257	QUAD 2-IN MUX	1.95
74LS258	QUAD 2/1 MUX	1.95
74LS266	QUAD EX-NOR GATE	.66
74LS279	QUAD SET/RESET LATCH	.88
74LS283	4-BIT FULL ADD	1.76
74LS299	FOUR BIT BINARY COUNTER	2.20
74LS365	HEX BUFF (TS)	.88
74LS366	HEX INV (TS)	.88
74LS367	HEX BUFF (4-2) (TS)	.88
74LS368	HEX INV (4-2) TS	.88
74LS373	TRI-STATE OCTAL D-FLIP-FLOP	2.00
74LS374	TRI-STATE OCTAL D-FLIP-FLOP	2.00
74LS386	QUAD EX-OR GATE	.69
74LS670	4x4 REG FILE (TS)	3.57

74 TTL

PART #	DESCRIPTION	PRICE
7400	QUAD TWO-INPUT GATE	$ .32
7401	QUAD TWO-INPUT GATE (OPEN COLL.)	.32
7402	QUAD TWO-INPUT NOR GATE	.32
7403	QUAD TWO-INPUT GATE (OPEN COLL.)	.32
7404	HEX INVERTER	.36
7405	HEX INVERTER (OPEN COLLECTOR)	.36
7406	30V-40MA HEX INVERTER	.45
7407	30V-40MA HEX BUFFER	.45
7408	QUAD 2-INPUT POSITIVE AND GATE	.32
7409	QUAD 2-INPUT AND GATE (OC)	.32
7410	TRIPLE THREE -INPUT GATE	.32
7411	TRIPLE THREE-INPUT AND GATE	.32
7413	DUAL SCHMITT TRIGGER	.54
7414	HEX SCHMITT TRIGGER	1.25
7416	15V-40MA HEX INVERTER	.45
7417	15V-40MA HEX BUFFER	.45
7420	DUAL FOUR-INPUT GATE	.32
7423	EXPAND DUAL FOUR-INPUT NOR GATE	.36
7425	DUAL FOUR-INPUT NOR GATE	.36
7426	QUAD 2-INPUT INTERFACE NAND GATE	.36
7427	TRIPLE THREE-INPUT NOR GATE	.36
7430	EIGHT-INPUT GATE	.32
7432	QUAD 2-INPUT OR GATE	.36
7437	QUAD TWO-INPUT NAND BUFFER	.42
7438	QUAD 2-INPUT NAND BUFFER (OC)	.42
7440	DUAL FOUR-INPUT BUFFER	.32
7441	BCD-DECIMAL DECODER/DRIVER (NIXIE)	1.30
7442	BCD-TO-DECIMAL DECODER	.77
7445	BCD-TO-DECIMAL DECODER/DRIVER	1.43
7446	BCD-7 SEG DECODER/DRIVER (30 VOLT)	1.32
7447	BCD-7 SEG DECODER/DRIVER (15 VOLT)	1.32
7448	BCD-7 SEG DECODER/DRIVER (ACTIVEHI)	1.32
7450	EXPAN. DUAL AND-OR-INVERT GATE	.32
7451	DUAL AND-OR-INVERT GATE	.32
7453	EXPANDABLE AND-OR-INVERT GATE	.32

74TTL

PART #	DESCRIPTION	PRICE
7454	AND-OR-INVERT GATE	$ .32
7460	DUAL FOUR-INPUT EXPANDER	.32
7470	EDGE-TRIGGERED J-K FLIP-FLOP	.50
7472	J-K MASTER SLAVE FLIP-FLOP	.45
7473	DUAL J-K FLIP-FLOP	.45
7474	DUAL D FLIP-FLOP	.45
7475	QUAD LATCH	.73
7476	DUAL J-K FLIP-FLOP	.45
7483	4-BIT BINARY FULL ADDER	.99
7485	FOUR-BIT MAGNITUDE COMPARATOR	1.30
7486	QUAD EXCLUSIVE-OR GATE	.40
7489	64 BIT RAM O.C.	2.98
7490	DECADE COUNTER	.73
7491	SERIAL-IN, SERIAL-OUT 8-BIT SHIFT REG	.99
7492	DIVIDE-BY-TWELVE COUNTER	.73
7493	FOUR-BIT BINARY COUNTER	.73
7495	4-BIT RIGHT-SHIFT, LEFT-SHIFT REGIST	.88
7496	5-BIT SHIFT REG. (PARA-IN, PARA-OUT)	.99
74107	DUAL J-K FLIP-FLOP	.99
74109	DUAL J-K FLIP-FLOP (FSC 9024)	.50
74121	ONE SHOT	.50
74123	DUAL ONE SHOT	.77
74125	TRI STATE QUAD BUFFER (DM8093)	.59
74126	TRI STATE QUAD BUFFER (DM8094)	.59
74132	QUAD SCHMITT TRIGGER	.99
74141	NIXIE DRIVER	1.35
74145	BCD TO DECIMAL DECODER DRIVER	1.21
74147	10/4 PRIORITY ENCODER	1.98
74148	8/3 PRIORITY ENCODER (9318)	1.98
74150	SIXTEEN LINE MULTIPLEXER	1.50
74151	EIGHT LINE MULTIPLEXER	1.10
74153	DUAL FOUR-INPUT MULTIPLEXER	1.10
74154	4 TO 16 LINE DECODE/DEMUX	1.65
74155	DUAL 2 TO 4 DEMULTIPLEXER	.99
74156	DUAL 2 TO 4 DEMUX (OC)	1.21

74 TTL

PART #	DESCRIPTION	PRICE
74157	QUAD 2-INPUT MULTIPLEXER (9322)	1.10
74160	PRESETTABLE DECADE COUNTER (9310)	1.32
74161	PRESET. DECADE BINARY COUNTER (9316)	1.32
74162	PRESET. DECADE CTR (SYNCH CLEAR)	1.32
74163	PRESET. BINARY CTR (SYNCH CLEAR)	1.32
74164	SERIAL-IN, PARA-OUT 8-BIT SHIFT REG.	1.43
74165	PARA-IN, SERIAL-OUT 8-BIT SHIFT REG	1.43
74166	8-BIT SHIFT REGISTER	1.43
74170	4 x 4 REGISTER FILE	2.42
74173	TRI ST. QUAD K F.-FLOP (DM8551N)	1.80
74174	HEX D FLIP-FLOP	1.21
74175	QUAD D FLIP-FLOP	1.21
74176	PRESET. DECADE COUNTER (DM8280)	1.32
74177	PRESET. BINARY COUNTER (DM8281)	1.32
74180	PARITY GENERATOR/CHECKER	1.21
74181	ARITHMETIC LOGIC UNIT	2.75
74182	CARRY LOOK AHEAD	1.10
74184	BCD-TO-BINARY COUNTER	2.10
74185	BINARY-TO-BCD CONVERTER	2.10
74189	64-BIT RAM (TRI-STATE)	3.65
74190	SYNCH. DECADE UP/DOWN COUNTER	1.43
74191	SYNCH. BINARY UP/DOWN COUNTER	1.43
74192	DECADE UP/DOWN COUNTER (DM8560N)	1.43
74193	BINARY UP/DOWN COUNTER (DM8563N)	1.43
74194	4-BIT, BI-DIREC. UNIV. SHIFT REG	1.10
74195	4-BIT PARALLEL SHIFT REG	1.10
74194	PRESET. DECADE COUNT. (DM8290N0	1.21
74198	PARA-IN, PARA-OUT 8-BIT SHIFT REG	2.20
74199	PARA-IN, PARA-OUT, 8-BIT SHIFT REG	2.20
74251	TRI STATE DM74151 (DM8121)	1.10
74284	4 x 4 MULT. (MOST SIG BIT) T.S.	4.95
74285	4 x 4 MULT. (LEAST SIG BIT) T.S.	4.95
74365	TRI STATE HEX BUFFER (DM8095)	.95
74366	TRI STATE HEX INVERT. (DM8096)	.95
74367	TRI STATE HEX BUFFER (4-2)	.95
74368	TRI STATE HEX INVERT. (4-2)	.95

LINEAR

PART #	DESCRIPTION	PRICE
LM301AN	IMPROVED 709 OP AMP	$ .49
LM307N	IMPROVED 741 OP AMP	.69
LM308N	PRECISION OP AMP LOW POWER	.79
LM311N	VOLTAGE COMPARATOR (DIP)	.84
LM311H	VOLTAGE COMPARATOR (TO-5)	1.42
LM324N	LOW POWER QUAD OP AMP	1.19
LM339N	LOW POWER & OFFSET VOLTAGE OP AMP	.80
LM348N	LOW POWER QUAD 741 OP AMP	1.31
LM358N	SINGLE ENDED LOW POWER DUAL OP AMP	.84
LM380N	2.5 WATT POWER AUDIO AMP	1.49
NE555V	TIMER I.C.	.55
NE555V/10	TIMER I.C. 10 PAK	4.50
NE556A	DUAL 555 TIMER	1.00
NE565A	PHASE LOCKED LOOP	1.49
LM710CN	HI SPEED VOLT COMP. (MC1710CP)	1.18
LM710CH	HI SPEED VOLT COMP. (MC1710CG)	1.20
LM711CN	DUAL V/COMP W/COMM OUTPUT (MC1711CP)	.64
LM711CH	DUAL V/COMP W/COMM OUTPUT (MC1711CG)	1.18
LM733CN	DIFF VIDEO AMP (MC1733CP)	1.00
LM741CN	G.P. OP AMP (MC1741CPI)	.49
LM741CN/10	G.P. OP AMP (10 PAK) (MC1741CPI)	3.99
LM741CH	G.P. OP AMP (MC1741CG)	.79
LM747CN	DUAL 741 (MC1747CP2)	1.00
LM747CH	DUAL 741 (MC1747CG)	1.25
LM748CN	NON-COMP OP AMP (MC1748CP1)	.56
LM748CH	NON-COMP OP AMP (MC1748CG)	.90
MC1330AP	LOW LEVEL VIDEO DET.	1.83
MC1349P	HI GAIN VIDEO IF AMP	1.49
MC1350P	VIDEO IF AMP	1.29
MC1352P	VIDEO IF AMP WITH AGC	1.69
MC1358P	SOUND IF AMP	1.90
MC1408LS	8-BIT D/A CONVERTER	4.69
MC1436CG	HI VOLT OP AMP	4.41
MC1439P1	HI SLEW RATE OP AMP	2.84
MC1445L	HI FREQ OP AMP	2.97
MC1456CP1	LINEAR OP AMP	1.20
MC1458CG	DUAL 741	.98
MC1458CP1	DUAL 741	.69
MC1488P	RS-232 DRIVER	1.18
MC1489	RS-232 RECEIVER	1.18
MC1496P	BAL. MOD-DEMOD	1.31
MC3302P	L/PWR L/OFST QUAD COMP.	.80
MC3310P	WIDE BAND AMP	.98
MC3340P	ELECTRONIC ATTENUATOR	1.50
MC3410P	QUAD OP AMP	.89

LINEAR

MC3403P	QUAD DIFF. OP AMP	1.20
MC3423P1	OVR/VOLT PROT CIRCUIT	1.31
LM3900	QUAD OP AMP	.90
RC4136	QUAD 741	1.79
MC4741CP	QUAD 741	1.40
IC8038	FUNCTION GENERATOR	4.50
MC75450P	DUAL PERIPH. DRIVER (AND)	1.80
MC75451P	DUAL PERIPH. DRIVER (AND)	1.25
MC75452P	DUAL PERIPH. DRIVER (NAND)	1.25
MC75453P	DUAL PERIPH. DRIVER (OR)	1.25
MC75454P	DUAL PERIPH. DRIVER (NOR)	1.25
MC75491P	QUAD LED SEGMENT DRIVER	.91
MC75492P	HEX LED DIGIT DRIVER	1.31

FET LINEAR

PART #	DESCRIPTION	PRICE
LF355N	JFET OP AMP L/CURRENT	$1.49
LF356N	JFET OP AMP WIDEBAND	1.49
LF357N	JFET OP AMP HI-SPEED	1.49

CA, AK, HI, CALL (213) 894-8171

PRIORITY ONE ELECTRONICS


4000 Series CMOS

PART #	PRODUCT DESCRIPTION	PRICE 1-24	25-99
4000	DUAL 3-INPUT NOR GATE + INV.	$ .40	$ .33
4001	QUAD 2-INPUT NOR GATE	.40	.33
4002	DUAL 4-INPUT NOR GATE	.40	.33
4006	18-BIT STATIC SHIFT REGISTER	1.42	1.18
4007	DUAL COMPLEMENTARY PAIR PLUS INV.	.40	.33
4008	4-BIT FULL ADDER WITH PAR. CARRY	1.75	1.04
4011	QUAD 2-INPUT NAND GATE	.40	.33
4012	DUAL 4-INPUT NAND GATE	.40	.33
4013	DUAL D FLIP/FLOP	.72	.60
4014	8-BIT STATIC SHIFT REGISTER	1.25	1.04
4015	DUAL 4-BIT STATIC SHIFT REGISTER	1.47	1.22
4016	QUAD BILATERAL SWITCH	.72	.60
4017	DECADE COUNTER/DIVIDER	1.25	1.04
4018	PRESETTABLE DIVIDE BY "N" COUNTER	1.14	.95
4020	14-STAGE RIP.-CARRY BINARY COUNTER	1.47	1.22
4021	8-BIT STATIC SHIFT REGISTER	1.25	1.04
4022	DIVIDE BY 8 COUNTER/DIVIDER	1.25	1.04
4023	TRIPLE 3-INPUT NAND GATE	.40	.33
4024	7-BIT BINARY COUNTER	1.06	.89
4025	TRIPLE 3-INPUT NOR	.40	.33
4027	DUAL J-K FLIP/FLOP	.72	.60
4028	BCD-TO-DECIMAL DECODER	1.02	.85
4029	PRESETTABLE UP/DOWN COUNTER	1.42	1.19
4032	TRIPLE SER ADDER	2.19	1.83
4034	8-BIT SHIFT REGISTER	3.50	2.91
4035	4-BIT SHIFT REGISTER	1.86	1.55
4040	12-BIT BINARY RIPPLE COUNTER	1.47	1.22
4042	QUAD D. LATCH	1.06	.89
4043	QUAD TRI-STATE NOR R/S LATCH	.99	.83
4044	QUAD TRI-STATE NAND R/S LATCH	.99	.83
4046	PHASE LOCKED LOOP	1.57	1.31
4049	HEX INVERTING BUFFER	.72	.60
4050	HEX BUFFER	.72	.60
4051	SINGLE 8-CHANNEL MULTIPLEXER	1.30	1.08
4052	DIFFERENTIAL 4-CHANNEL MULTIPLEXER	1.30	1.08
4053	TRIPLE 2-CHANNEL MULTIPLEXER	1.30	1.08
4066	QUAD BILATERAL SWITCH	.80	.66
4068	8-INPUT NAND GATE	.40	.33
4069	HEX INVERTER	.40	.33
4070	QUAD EXCLUSIVE OR GATE	.40	.33
4071	BUFFERED QUAD 2-INPUT OR GATE	.40	.33
4072	DUAL 4-INPUT OR GATE	.40	.33
4073	TRIPLE 3-INPUT AND GATE	.40	.33
4075	TRIPLE 3-INPUT OR GATE	.40	.33
4076	TRI-STATE QUAD LATCH	1.57	1.31
4077	QUAD ECLSV NOR GATE	.40	.33
4078	8-INPUT NOR GATE	.40	.33
4081	BUFFERED QUAD 2-INPUT AND GATE	.40	.33
4082	DUAL 4-INPUT GATE	.40	.33
4093	QUAD 2-INPUT NAND SCHMITT TRIGGER	.78	.65
4094	8-BIT BUS-COMP SHFT STR LATCH	3.01	2.51
4099	8-BIT ADDRESSABLE LATCH	1.73	1.44
4160	DEC CNTR ASYNC CLR	1.28	1.06
4161	BIN CNTR ASYNC CLR	1.28	1.06
4162	DEC CNTR SYNC CLR	1.28	1.06
4163	BIN CNTR SYNC CLR	1.28	1.06
4174	HEX D FLIP FLOP	$ 1.28	$ 1.06
4175	QUAD D FLIP FLOP	1.28	1.06
4194	4-BIT UNIV. SHIFT REG.	1.42	1.18
4404	PULSE CODE MOD/DEMOD (CODEC)	34.40	32.48
4406	PULSE CODE MOD/DEMOD (CODEC)	43.00	35.83

PRIORITY ONE ELECTRONICS supplies only "B" type, Buffered, CMOS devices if manufactured by Motorola Semiconductor.

PART #	PRODUCT DESCRIPTION	PRICE 1-24	25-99
4414	PCM FILTER	23.76	19.80
4408	BIN TO PHONE PLS CONV.	10.04	8.37
4409	BIN TO PHONE PLS CONV.	10.04	8.37
4410	2 OF 8 TONE ENCDR	9.28	7.73
4411	BIT RATE FEQ. GEN.	11.68	9.73
4412	UNIV. LW-SPEED MODEM	14.11	11.76
4415	QUAD PREC. TIMER/DRIVER	5.65	4.71
4419	2 OF 8 KYPD TO BIN ENCOR	3.30	2.75
4443	uP A/D CONVERTER	2.85	2.38
4457	R/C TRANSMITTER	4.50	3.75
4458	R/C TRANSMITTER	9.36	7.80
4469	ADDRESS ASYN RECEIVER/TRANSMITTER	13.37	11.14
4490	HEX CONTACT DE-BOUNCER	2.89	2.40
4495	HEX TO 7 SEG DECODER/DRIVER	2.70	2.25
4500	1-BIT CPU IND. CONT. UNIT	5.46	4.55
4501	TRIPLE GATE	.40	.33
4502	STROBE HEX INV-BUFFER	1.73	1.44
4503	TRI-STATE HEX BUFFER	.84	.70
4506	DUAL EXP AOI GATE	1.00	.83
4508	DUAL 4-BIT LATCH	4.53	.83
4510	BCD UP/DOWN COUNTER	1.47	1.22
4511	BCD-TO-SEVEN SEGMENT DECODER DRIVER	1.44	1.20
4512	8-CHANNEL DATA SELECTOR	1.42	1.18
4513	BCD-7 SEG LTCH/DEC/DRVR RIP-BL	1.91	1.59
4514	4-BIT LATCH 4 TO 16 LINE DECODER HI	2.91	2.43
4515	4-BIT LATCH 4 TO 16 LINE DECODER	2.91	2.43
4516	BINARY UP/DOWN COUNTER	1.59	1.32
4517	DUAL 64-BIT STATIC SHIFT REG	7.03	5.86
4518	DUAL BCO UP COUNTER	1.47	1.22
4519	4-BIT AND/OR SELECTOR	.80	.66
4520	DUAL BINARY UP COUNTER	1.47	1.22
4521	24 STG FREQ DIVIDER	3.56	2.97
4522	DIVIDE-BY-N COUNTER (BCD)	1.81	1.51
4526	DIVIDE-BY-COUNTER (BINARY)	1.81	1.51
4527	BCD RATE MULTIPLIER	1.59	1.33
4528	DUAL MONOSTABLE MULTIVIBRATOR	1.81	1.51
4529	DUAL 4-CHANNEL ANALOG DATA SELECTOR	1.96	1.63
4530	DUAL 5 IN. MAJORITY LOG-GATE	1.22	1.02
4532	8-BIT PRIOR ENCODER	3.01	2.51
4534	REAL TIME 5 DEC CNTR	9.16	7.63
4536	PROG. TIMER	4.86	4.05
4538	DUAL PREC. MONO-MLTVB	1.81	1.51
4539	DUAL 4-CHANNEL DATA SEL/MUX	1.44	1.20
4541	PROG OSC-TIMER	1.80	1.50
4543	BCD TO SEVEN SEGMENT DECODER (LCD)	2.63	2.19
4547	HI-CURRENT BCD/7 SEG DEC/DRVR	1.65	1.38
4551	QUAD 2 IN. ANALOG MUX	1.44	1.20
4553	3 DIGIT BCD CNTR	3.95	3.29
4556	DUAL BIN TO 1 OF 4 DEC (INV.)	1.15	.96
4557	1 TO 64-BIT VARIABLE SHIFT REG	3.95	3.29
4558	BCD TO 7 SEG DCDR	1.77	1.47
4560	NBCD ADDER	3.80	3.17
4566	IND TIME BASE GEN.	3.28	1.98
4568	PHASE COMPARATOR/PROG. TIMER	6.49	5.41
4569	HIGH SPEED DUAL PROG. CTR	2.48	2.07
4582	LOOK AHEAD CARRY BLOCK	1.37	1.14
4583	DUAL SCHMITT TRIG	1.69	1.41
4584	EX RPL MM74C14N	.85	.71
4585	4-BIT MAG COMP	1.80	1.50
4597	8-BIT BUS COMPAT CNTR-LATCH	3.72	3.10
4598	8-BIT BUS COMPAT ADDRS-LATCH	4.33	3.61
4599	8-BIT ADDRESSABLE LATCH	3.72	3.10
45100	4 x 4 CROSS POINT SW W/CONT MEM	4.44	3.70

6 Amps 125 VAC
7 Amps 30 VDC




DPDT STANDARD TOGGLE

CAL-ST21	(ON-NONE-ON)	$3.50	$3.25	$3.10
CAL-ST22	(ON-OFF-ON)	3.80	3.50	3.25
CAL-ST23	(MOM ON-OFF-MOM ON)	3.80	3.50	3.25
CAL-ST24	(ON-OFF-MOM ON)	3.95	3.60	3.40
CAL-ST25	(ON-NONE-MOM ON)	3.95	3.60	3.40
CAL-ST26	(ON-ON-ON)	3.95	3.60	3.40

filament transformers

High quality low voltage filament transformers. Conservatively rated. Individually boxed.



Part No.	Primary	Secondary	Rating	Sh.Wt.	Price
CAL-T631	117 V AC	6.3 V	1 AMP	.5 lbs.	$3.39
CAL-T1261	117 V AC	12.6 V	1 AMP	.5 lbs.	$4.39
CAL-T126C05	117 V AC	12.6 V CT	500 MA	.5 lbs.	$3.39
CAL-T126C3	117 V AC	12.6 V CT	3 AMP	2 lbs.	$7.59
CAL-T241	117 V AC	24 V	1 AMP	1 lb.	$4.79

VOLTAGE REGULATOR

POSITIVE

78H05	5V	5A	$8.95
309K	5V	1.5A	$2.09
317K	1.2-37V	1.5A	$4.50
323K	5V	3A	$7.70
7805CR	5V	1.5A	$2.50
7806ck	6V	1.5A	$2.50
7808CK	8V	1.5A	$2.50
7812CK	12V	1.5A	$2.50
7815CK	15V	1.5A	$2.50
7818CK	18V	1.5A	$2.50
317T	1.2-37V	1.5A	$2.95
7805CT	5V	1.5A	$1.25
7806CT	6V	1.5A	$1.25
7808CT	8V	1.5A	$1.25
7812CT	12V	1.5A	$1.25
7815CT	15V	1.5A	$1.25
7818CT	18V	1.5A	$1.25
7824CT	24V	1.4A	$1.25
78L05CP	5V	.1A	$ .49
78L08CP	8V	.1A	$ .49
78L12CP	12V	.1A	$ .49
78L15CP	15V	.1A	$ .49
78L18CP	18V	.1A	$ .49
78L24CP	24V	.1A	$ .49
LM305H	4.5V - 40V VOLT REG.		$1.89
LM723CN	2-37V VOLT REG.		$ .59
LM723CH	2-37V VOLT REG.		$1.06
MC3423PI	OVER/VOLT PROT		$1.31

CASE STYLE




K
TO-3




CT
TO-220



CP
TO-92



H Package



N Package

NEGATIVE

7905CK	5V	1.5A	$2.50
7906CK	6V	1.5A	$3.69
7908CK	8V	1.5A	$3.69
7912CK	12V	1.5A	$2.50
7915CK	15V	1.5A	$2.50
7918CK	18V	1.5A	$3.69
7924CK	24V	1.5A	$3.69
7905CT	5V	1.5A	$1.75
7906CT	6V	1.5A	$1.75
7908CT	8V	1.5A	$1.75
7912CT	12V	1.5A	$1.75
7915CT	15V	1.5A	$1.75
7918CT	18V	1.5A	$1.75
7924CT	24V	1.5A	$1.75
79L05CP	5V	.1A	$1.10
79L12CP	12V	.1A	$1.10
79L15CP	15V	.1A	$1.10
79L18CP	18V	.1A	$1.10
79L24CP	24V	.1A	$1.10

We will be pleased to give you a quotation on your large quantity requirements.

WE ARE PROUD TO FEATURE MOTOROLA, NATIONAL, AND OTHER LEADING MANUFACTURES OF SEMICONDUCTORS.

EXACT PART NUMBER OF DEVICES MAY VARY DEPENDING ON MANUFACTURE.


ORDER TOLL FREE (800) 423-5633

PRIORITY ONE ELECTRONICS

CARBON FILM
¼ WATT 5%
FIXED RESISTORS

ORDERING INSTRUCTIONS:
¼ watt resistors must be ordered in exact multiples of 4, 50(L) or 1,000(M) pcs. per value.

CONSTRUCTION:

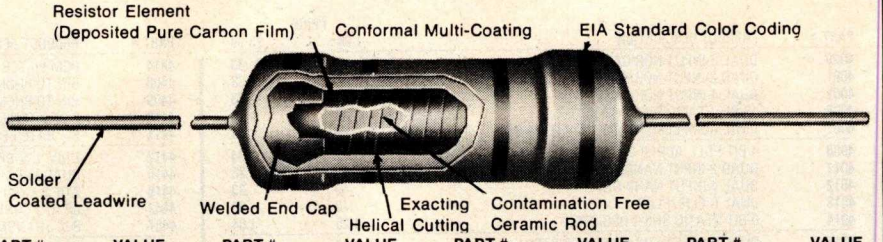

PART #	VALUE	PART #	VALUE	PART #	VALUE	PART #	VALUE	PART #	VALUE	PART #	VALUE
RCQ-100	10 ohm	RCQ-101	100 ohm	RCQ-102	1.0 K	RCQ-103	10 K	RCQ-104	100 K	RCQ-105	1.0 M
RCQ-110	11 ohm	RCQ-111	110 ohm	RCQ-112	1.1 K	RCQ-113	11 K	RCQ-114	110 K	RCQ-115	1.1 M
RCQ-120	12 ohm	RCQ-121	120 ohm	RCQ-122	1.2 K	RCQ-123	12 K	RCQ-124	120 K	RCQ-125	1.2 M
RCQ-130	13 ohm	RCQ-131	130 ohm	RCQ-132	1.3 K	RCQ-133	13 K	RCQ-134	130 K	RCQ-135	1.3 M
RCQ-150	15 ohm	RCQ-151	150 ohm	RCQ-152	1.5 K	RCQ-153	15 K	RCQ-154	150 K	RCQ-155	1.5 M
RCQ-160	16 ohm	RCQ-161	160 ohm	RCQ-162	1.6 K	RCQ-163	16 K	RCQ-164	160 K	RCQ-165	1.6 M
RCQ-180	18 ohm	RCQ-181	180 ohm	RCQ-182	1.8 K	RCQ-183	18 K	RCQ-184	180 K	RCQ-185	1.8 M
RCQ-200	20 ohm	RCQ-201	200 ohm	RCQ-202	2.0 K	RCQ-203	20 K	RCQ-204	200 K	RCQ-205	2.0 M
RCQ-220	22 ohm	RCQ-221	220 ohm	RCQ-222	2.2 K	RCQ-223	22 K	RCQ-224	220 K	RCQ-225	2.2 M
RCQ-240	24 ohm	RCQ-241	240 ohm	RCQ-242	2.4 K	RCQ-243	24 K	RCQ-244	240 K	RCQ-245	2.4 M
RCQ-270	27 ohm	RCQ-271	270 ohm	RCQ-272	2.7 K	RCQ-273	27 K	RCQ-274	270 K	RCQ-275	2.7 M
RCQ-300	30 ohm	RCQ-301	300 ohm	RCQ-302	3.0 K	RCQ-303	30 K	RCQ-304	300 K	RCQ-305	3.0 M
RCQ-330	33 ohm	RCQ-331	330 ohm	RCQ-332	3.3 K	RCQ-333	33 K	RCQ-334	330 K	RCQ-335	3.3 M
RCQ-360	36 ohm	RCQ-361	360 ohm	RCQ-362	3.6 K	RCQ-363	36 K	RCQ-364	360 K	RCQ-365	3.6 M
RCQ-390	39 ohm	RCQ-391	390 ohm	RCQ-392	3.9 K	RCQ-393	39 K	RCQ-394	390 K	RCQ-395	3.9 M
RCQ-430	43 ohm	RCQ-431	430 ohm	RCQ-432	4.3 K	RCQ-433	43 K	RCQ-434	430 K	RCQ-435	4.3 M
RCQ-470	47 ohm	RCQ-471	470 ohm	RCQ-472	4.7 K	RCQ-473	47 K	RCQ-474	470 K	RCQ-475	4.7 M
RCQ-510	51 ohm	RCQ-511	510 ohm	RCQ-512	5.1 K	RCQ-513	51 K	RCQ-514	510 K	RCQ-515	5.1 M
RCQ-560	56 ohm	RCQ-561	560 ohm	RCQ-562	5.6 K	RCQ-563	56 K	RCQ-564	560 K	RCQ-565	5.6 M
RCQ-620	62 ohm	RCQ-621	620 ohm	RCQ-622	6.2 K	RCQ-673	67 K	RCQ-624	620 K	RCQ-625	6.2 M
RCQ-680	68 ohm	RCQ-681	680 ohm	RCQ-682	6.8 K	RCQ-683	68 K	RCQ-684	680 K	RCQ-685	6.8 M
RCQ-750	75 ohm	RCQ-751	750 ohm	RCQ-752	7.5 K	RCQ-753	75 K	RCQ-754	750 K	RCQ-755	7.5 M
RCQ-820	82 ohm	RCQ-821	820 ohm	RCQ-822	8.2 K	RCQ-823	82 K	RCQ-824	820 K	RCQ-825	8.2 M
RCQ-910	91 ohm	RCQ-911	910 ohm	RCQ-912	9.1 K	RCQ-913	91 K	RCQ-914	910 K	RCQ-915	9.1 M
										RCQ-106	10 M

TO ORDER, YOU MUST ADD A QUANTITY CODE TO THE PART

"BLANK" = PACKAGE OF 4
SHIPPING WT. 1 OZ.

29¢

"L" = PACKAGE OF 50
SHIPPING WT. 1 OZ.

1-19	$1.00
20+	$ .80

"M" = PACKAGE OF 1,000
SHIPPING WT. 1 LB.

1-4	$14.00
5-9	$13.00
10-24	$12.00
25+	Call For Price

EXAMPLE OF HOW TO ORDER

IF YOU WISH:	QTY. ORDERED	PART NUMBER	UNIT	AMOUNT
8 PCS. OF A 47 K RESISTOR	2	RCQ-473	.29	.58
150 PCS. OF A 2.2 M RESISTOR	3	RCQ-225L	1.00	3.00
2,000 PCS. OF A 390 ohm RESISTOR	2	RCQ-391M	14.00	28.00

TRANSISTORS

	POLARITY	VCE	IC(MA)	HFE	F(MHZ)	PACKAGE OF	100 +
2N697	NPN	40V	150	120	30	2/$1.18	$ .50
2N2219A	NPN	40V	800	200	300	2/$1.00	$ .40
2N2221A	NPN	30V	800	120	250	2/$1.00	$ .35
2N2222A	NPN	40V	800	300	300	3/$1.00	$ .27
2N2904A	PNP	60V	600	40	3WT	2/$1.00	$ .41
2N2906A	PNP	60V	600	40	1.8WT	2/$1.00	$ .40
2N2907A	PNP	60V	600	100	200	3/$1.00	$ .27
2N3053	NPN	40V	700	250	5WT	2/$1.40	$ .50
2N3054	NPN	55V	4A	100	75WT	$1.42	$1.23
2N3055	NPN	60V	15A	70	115WT	$ .98	$ .75
2N3904	NPN	40V	200	300	300	5/$1.00	$ .14
2N3906	PNP	40V	200	300	250	5/$1.00	$ .14
2N4400	NPN	40V	600	150	200	4/$1.00	$ .15
2N4401	NPN	40V	600	300	250	4/$1.00	$ .15
2N4402	PNP	40V	600	150	150	4/$1.00	$ .15
2N4403	PNP	40V	600	300	200	4/$1.00	$ .15
2N5400	PNP	120V	600	180	310MW	2/$1.00	$ .40
2N5401	PNP	150V	600	240	310MW	2/$1.00	$ .40
2N6028	PUT	40V	375MW	PROG	UJT	2/$1.00	$ .45
2N6282	NDL	60V	10A	1.8K	160W	$4.12	$3.55
2N6285	PDL	60V	10A	1.8K	160W	$4.95	$4.25
MPF102	NJFT	25V	10	VHF	AMP	2/$1.00	$ .45
MPF161	PJFT	40V	10	GEN	PRPS	2/1.60	$ .60
MPS2222A	PNP	40V	800	300	300	4/$1.00	$ .16
MPS2907	PNP	60V	600	100	200	4/$1.00	$ .16
MPSA13	NDL	30V	300	5K	200	2/$1.00	$ .30
MPSA63	PDL	30V	300	5K	200	2/$1.00	$ .30
MJE2955	PNP	60V	10A	90W	2	$2.98	$2.36
MJE2955T	PNP	60V	10A	75W	2	$1.19	$ .95
MJE3055	NPN	60V	10A	90W	2	$1.98	$1.60
MJE3055T	NPN	60V	10A	75W	2	$ .98	$ .90
TIP29A	NPN	60V	3A	75	30W	2/$1.40	$ .55
TIP30A	PNP	60V	3A	75	30W	2/$1.60	$ .60
TIP31A	NPN	60V	5A	50	40W	2/$1.60	$ .65
TIP32A	PNP	60V	5A	50	40W	2/$1.60	$ .65
TIP41A	NPN	60V	10A	75	65W	$.98	$ .85
TIP42C	PNP	60V	10A	75	65W	$1.49	$1.10
TIP48	NPN	300V	1A	150	40W	$1.10	$ .90
TIP49	NPN	350V	1A	150	40W	$1.20	$ .95
TIP120	NDL	60V	8A	1K	65W	$1.40	$1.15
TIP127	PDL	100V	8A	1K	65W	$1.98	$1.55
2N5060	SCR	30V	.8A			2/$1.50	$ .60
C106B1	SCR	250V	4A			2/$1.00	$ .39
T2800B	TRIAC	200V	8A			$1.49	$1.20

SIGNAL AND RECT. DIODES

	PIV	AMPS	APPLIC.	PACKAGE OF	/c 100
IN1183	50V	35A	RECT.	1/$2.26	$1.74
IN4001	50V	1A	RECT.	5/$1.00	$10.00
IN4002	100V	1A	RECT.	5/$1.00	$10.00
IN4003	200V	1A	RECT.	5/$1.00	$10.00
IN4004	400V	1A	RECT.	5/$1.00	$12.00
IN4005	600V	1A	RECT.	4/$1.00	$14.50
IN4006	800V	1A	RECT.	4/$1.00	$16.00
IN4007	1000V	1A	RECT.	4/$1.00	$18.50
IN4148	75V	10MA	SIG.	5/$1.00	$10.00
IN5400	50V	3A	RECT.	3/$1.19	$30.00
IN5402	200/V	3A	RECT.	3/$1.49	$40.00
IN5404	400V	3A	RECT.	3/$1.79	$50.00


ZENER DIODES

	Vz	WATT	IT MA	PACKAGE OF	/c PACKAGE OF 100
IN4728A	3.3V	1W	76MA	4/$1.00	$16.00
IN4729A	3.6V	1W	69MA	4/$1.00	$16.00
IN4730A	3.9V	1W	64MA	4/$1.00	$16.00
IN4731A	4.3V	1W	58MA	4/$1.00	$16.00
IN4732A	4.7V	1W	53MA	4/$1.00	$16.00
IN4733A	5.1V	1W	49MA	4/$1.00	$16.00
IN4734A	5.6V	1W	45MA	4/$1.00	$16.00
IN4735A	6.2V	1W	41MA	4/$1.00	$16.00
IN4736A	6.8V	1W	37MA	4/$1.00	$16.00
IN4737A	7.5V	1W	34MA	4/$1.00	$16.00
IN4738A	8.2V	1W	31MA	4/$1.00	$16.00
IN4739A	9.1V	1W	28MA	4/$1.00	$16.00
IN4740A	10V	1W	25MA	4/$1.00	$16.00
IN4741A	11V	1W	23MA	4/$1.00	$16.00
IN4742A	12V	1W	21MA	4/$1.00	$16.00
IN4743A	13V	1W	19MA	4/$1.00	$16.00
IN4744A	15V	1W	17MA	4/$1.00	$16.00
IN4746A	18V	1W	14MA	4/$1.00	$16.00
IN4747A	20V	1W	12.5MA	4/$1.00	$16.00
IN4751A	30V	1W	8.5MA	4/$1.00	$16.00
IN4754A	39V	1W	6.5MA	3/$1.00	$20.00
IN4757A	51V	1W	5MA	3/$1.00	$20.00
IN4759A	62V	1W	4MA	2/$1.00	$38.00
IN4761A	75V	1W	3.3MA	2/$1.00	$42.00
IN4763A	91V	1W	2.8MA	2/$1.00	$42.00
IN4764A	100V	1W	2.5MA	2/$1.00	$42.00

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS


ALUMINUM ELECTROLYTIC CAPACITORS



AXIAL LEAD

PART NO. VALVE/VOLTAGE	SIZE (INCHES)	PRICE PER PKG. OF:	100 PAC ADD "C" TO END OF PART #	1000 PAC ADD "M" TO END OF PART #
CA-1/50	.19 x .49	6/1.00	11.00	90.00
CA-2.2/50	.19 x .49	6/1.00	11.00	90.00
CA-3.3/50	.24 x .49	6/1.00	11.00	90.00
CA-4.7/50	.24 x .49	6/1.00	11.00	90.00
CA-10/50	.24 x .63	6/1.00	11.00	90.00
CA-22/16	.24 x .49	6/1.00	11.00	90.00
CA-22/50	.32 x .63	4/1.00	15.00	120.00
CA-33/16	.24 x .49	5/1.00	14.00	110.00
CA-33/35	.32 x .63	4/1.00	17.00	130.00
CA-47/16	.24 x .63	4/1.00	15.00	115.00
CA-47/35	.32 x .79	3/1.00	20.00	140.00
CA-100/16	.32 x .63	4/1.00	18.00	140.00
CA-100/35	.40 x .79	3/1.20	27.00	220.00
CA-220/16	.40 x .79	3/1.00	22.00	170.00
CA-220/35	.40 x 1.24	2/1.00	30.00	230.00
CA-330/16	.40 x .99	3/1.20	25.00	200.00
CA-330/35	.51 x 1.24	3/1.20	36.00	300.00
CA-470/10	.40 x .99	3/1.20	25.00	200.00
CA-470/16	.40 x 1.24	2/1.00	32.00	240.00
CA-470/35	.63 x 1.24	2/1.40	42.00	340.00
CA-1000/10	.51 x .99	2/1.00	34.00	270.00
CA-1000/16	.51 x 1.24	2/1.20	38.00	295.00
CA-1000/35	.63 x 1.58	.98	60.00	520.00
CA-2200/10	.63 x 1.24	2/1.50	49.00	390.00
CA-2200/25	.87 x 1.98	1.10	74.00	605.00
CA-3300/10	.63 x 1.58	1.00	65.00	500.00
CA-3300/25	.87 x 1.98	1.50	100.00	750.00
CA-4700/10	.71 x 1.58	1.20	80.00	600.00
CA-4700/25	.99 x 1.98	2.00	130.00	1000.00

RADIAL LEAD



PART NO. VALVE/VOLTAGE	SIZE (INCHES)	PRICE PER PKG. OF:	100 PAC ADD "C" TO END OF PART #	1000 PAC ADD "M" TO END OF PART #
CR-1/50	.20 x .45	6/1.00	8.00	65.00
CR-2.2/50	.20 x .45	6/1.00	8.00	65.00
CR-3.3/50	.20 x .45	6/1.00	8.00	65.00
CR-4.7/50	.20 x .45	6/1.00	8.00	65.00
CR-10/50	.24 x .45	6/1.00	9.00	70.00
CR-22/16	.24 x .45	6/1.00	9.00	70.00
CR-22/35	.32 x .49	6/1.00	12.00	95.00
CR-33/16	.24 x .45	6/1.00	9.00	70.00
CR-33/35	.39 x .49	6/1.00	13.00	103.00
CR-47/16	.32 x .49	6/1.00	12.00	95.00
CR-47/35	.39 x .49	5/1.00	14.00	110.00
CR-100/16	.39 x .49	5/1.00	13.00	103.00
CR-100/35	.39 x .63	4/1.00	15.00	115.00
CR-220/16	.39 x .63	4/1.00	15.00	115.00
CR-220/35	.51 x .79	3/1.00	24.00	180.00
CR-330/16	.51 x .79	3/1.00	22.00	150.00
CR-330/35	.63 x .99	2/1.00	32.00	250.00
CR-470/16	.51 x .79	3/1.00	24.00	180.00
CR-470/35	.63 x .99	2/1.20	40.00	310.00
CR-1000/10	.51 x .79	3/1.20	25.00	200.00
CR-1000/16	.63 x .99	3/1.40	31.00	230.00
CR-1000/35	.71 x 1.40	2/1.50	57.00	450.00
CR-2200/10	.63 x 1.24	2/1.20	44.00	310.00
CR-2200/25	.87 x 1.58	1.00	70.00	550.00
CR-3300/10	.63 x 1.40	2/1.60	60.00	400.00
CR-4700/10	.71 x 1.58	1.00	70.00	550.00

Volume Discount: C-packages, 1-9 None, 10-24 less 10%, 25 - less 15%. M-packages, 1-4 None, 5-9 less 10%, 10-up Call for price. Axial and Radial Capacitors may be combined in standard packages for best price. Other values/voltages available in 1000 (M) packages - Call for price.

"BLANK" = Package of ( ) **"C" = Package of 100**
"M" = Package of 1,000

Exact size may vary. The dimensions above are for reference only.

CRYSTALS

PART #/FREQ.	APPLICATION	1-9	10-24
XTL1.000MH	6800CPU, STD. CLOCK	$4.95	$4.45
XTL1.843MH	4411 BAUD RATE GEN	$4.95	$4.45
XTL2.000MH	Z80 CPU, STD. CLOCK	$4.95	$4.45
XTL3.000MH	STANDARD CLOCK FREQ.	$4.95	$4.45
XTL3.276MH	ICM7025,STOPWATCH	$4.95	$4.45
XTL3.579MH	TV COLOR BURST SM CASE	$3.95	$3.50
XTL4.000MH	Z80A CPU, STD CLOCK	$3.95	$3.50
XTL6.000MH	STANDARD CLOCK FREQ.	$3.95	$3.50
XTL10.00MH	STANDARD CLOCK FREQ.	$3.95	$3.50
XTL18.00MH	8080, 8008, 8224	$3.95	$3.50
XTL20.00MH	STANDARD CLOCK FREQ.	$3.95	$3.50

Arco DISC Ceramic

CODE LETTER	VOLT-AGE	Dia.	Lead Spacing	Thk.	Lead Dia.
		Inches			
A	1000V	.290	.250	.156	.025
B	1000V	.385	.250	.156	.025
C	1000V	.590	.375	.156	.025
D	50V	.276	.156	.250	.025
E	50V	.315	.156	.250	.025
F	50V	.355	.156	.375	.025
G	50V	.473	.156	.375	.025
H	25V	.394	.157	.250	.025
I	25V	.484	.157	.250	.025
J	25V	.532	.157	.375	.025

ARCO DISC CERAMIC

Part #	Value	Code Letter	Price per Package of:	-C 100 pac Add -C to end of part #	-M 1000 pac Add -M to end of part #
CCD-3R3	3.3pf	A	4/29¢	$4.60	$37.00
CCD-050	5 pf	A	4/29¢	$4.60	$37.00
CCD-060	6 pf	A	4/29¢	$4.60	$37.00
CCD-6R8	6.8pf	A	4/29¢	$4.60	$37.00
CCD-7R5	7.5pf	A	4/29¢	$4.60	$37.00
CCD-080	8pf	A	4/29¢	$4.60	$37.00
CCD-100	10pf	A	4/29¢	$4.60	$37.00
CCD-120	12pf	A	4/29¢	$4.60	$37.00
CCD-150	15pf	A	4/29¢	$4.60	$37.00
CCD-180	18pf	A	4/29¢	$4.60	$37.00
CCD-200	20pf	A	4/29¢	$4.60	$37.00
CCD-220	22pf	A	4/29¢	$4.60	$37.00
CCD-240	24pf	A	4/29¢	$4.60	$37.00
CCD-250	25pf	A	4/29¢	$4.60	$37.00
CCD-270	27pf	A	4/29¢	$4.60	$37.00
CCD-300	30pf	A	4/29¢	$4.60	$37.00
CCD-330	33pf	A	4/29¢	$4.60	$37.00
CCD-390	39pf	A	4/29¢	$4.60	$37.00
CCD-470	47pf	A	4/29¢	$4.60	$37.00
CCD-500	50pf	A	4/29¢	$4.60	$37.00
CCD-510	51pf	A	4/29¢	$4.60	$37.00
CCD-560	56pf	A	4/29¢	$4.60	$37.00
CCD-680	68pf	A	4/29¢	$4.60	$37.00
CCD-750	75pf	A	4/29¢	$4.60	$37.00
CCD-820	82pf	A	4/29¢	$4.60	$37.00
CCD-910	91pf	A	4/29¢	$4.60	$37.00
CCD-101	100pf	A	4/29¢	$4.60	$37.00
CCD-121	120pf	A	4/29¢	$4.60	$37.00
CCD-131	130pf	A	4/29¢	$4.60	$37.00
CCD-151	150pf	A	4/29¢	$4.60	$37.00
CCD-181	180pf	A	4/29¢	$4.60	$37.00
CCD-201	200pf	A	4/29¢	$4.60	$37.00
CCD-221	220pf	A	4/29¢	$4.60	$37.00
CCD-241	240pf	A	4/29¢	$4.60	$37.00
CCD-251	250pf	A	4/29¢	$4.60	$37.00
CCD-271	270pf	A	4/29¢	$4.60	$37.00
CCD-301	300pf	A	4/29¢	$4.60	$37.00
CCD-331	330pf	A	4/29¢	$4.60	$37.00
CCD-351	350pf	A	4/29¢	$4.60	$37.00
CCD-361	360pf	A	4/29¢	$4.60	$37.00
CCD-391	390pf	A	4/29¢	$4.60	$37.00
CCD-401	400pf	A	4/29¢	$4.60	$37.00
CCD-471	470pf	A	4/29¢	$4.60	$37.00
CCD-501	500pf	A	4/29¢	$4.60	$37.00
CCD-511	510pf	A	4/29¢	$4.60	$37.00
CCD-561	560pf	A	4/29¢	$4.60	$37.00
CCD-601	600pf	A	4/29¢	$4.60	$37.00
CCD-681	680pf	A	4/29¢	$4.60	$37.00
CCD-751	750pf	A	4/29¢	$4.60	$37.00
CCD-821	820pf	A	4/29¢	$4.60	$37.00
CCD-911	910pf	A	4/29¢	$4.60	$37.00
CCD-102G	.001uf	A	4/29¢	$4.60	$37.00
CCD-122	.0012uf	B	3/29¢	$5.40	$43.00
CCD-132	.0013uf	B	3/29¢	$5.40	$43.00
CCD-152G	.0015uf	B	3/29¢	$5.40	$43.00
CCD-162	.0016uf	B	3/29¢	$5.40	$43.00
CCD-182	.0018uf	B	3/29¢	$5.40	$43.00
CCD-202G	.002uf	B	3/29¢	$5.40	$43.00
CCD-222G	.0022uf	B	3/29¢	$5.40	$43.00
CCD-252G	.0025uf	B	3/29¢	$5.40	$43.00
CCD-272G	.0027uf	B	3/29¢	$5.40	$43.00
CCD-302G	.003uf	B	3/29¢	$5.40	$43.00
CCD-332G	.0033uf	C	3/29¢	$6.80	$54.00
CCD-392G	.0039uf	C	3/29¢	$6.80	$54.00
CCD-402G	.004uf	C	3/29¢	$6.80	$54.00
CCD-432G	.0043uf	C	3/29¢	$6.80	$54.00
CCD-472	.0047uf	C	3/29¢	$6.80	$54.00
TCD-502Z	.005uf	D	4/29¢	$4.90	$40.00
TCD-103Z	.01uf	E	4/29¢	$4.90	$40.00
TCD-203Z	.02uf	F	4/29¢	$4.90	$40.00
TCD-253Z	.025uf	G	4/29¢	$4.90	$40.00
TCA-333Z	.033uf	H	4/29¢	$5.60	$45.00
TCA-503Z	.05uf	I	3/29¢	$6.00	$48.00
TCA-683Z	.068uf	J	2/29¢	$9.20	$74.00
TCA-104Z	.1uf	J	2/29¢	$10.60	$85.00

TO ORDER YOU MUST ADD
A QUANTITY CODE TO THE PART #

IF YOU WISH:	QTY. ORDERED	PART NUMBER	UNIT	AMOUNT
18 PCS. of 2.2 uf/50V Capacitor (Axial)	3	CA-2.2/50	1.00	3.00
200 PCS. of 100 uf/16V Capacitor (Radial) . .	2	CR-100/16C	13.00	26.00
1000 PCS. of 2,200 uf/25V Capacitor (Axial)	1	CA-2200/25M	605.00	605.00


PLEASE ORDER BY PART NUMBER

Litton WINCHESTER ELECTRONICS

D-Subminiature Connector




P = Plug-Male
S = Socket-Female
C = Cover-Hood



PART NO.	NO. OF PINS	1-9	10-24	25-99	100-249
IDC-DE9P	9	4.20	4.00	3.60	3.20
IDC-DE9S	9	4.50	4.20	3.80	3.40
IDC-DE9C	9	1.25	1.10	1.00	
IDC-DA15P	15	4.35	4.20	3.75	3.40
IDC-DA15S	15	5.00	4.85	4.35	3.90
IDC-DA15C	15	1.40	1.25	1.10	.95
IDC-DB 25P	25	6.25	6.00	5.20	4.70
IDC-DB 25S	25	6.60	6.35	5.60	5.00
IDC-DB 25C	25	1.60	1.50	1.35	1.20
IDC-DC37P	37	8.80	8.00	7.20	6.40
IDC-DC37S	37	11.00	10.25	9.20	8.20
IDC-DC37C	37	2.25	2.00	1.80	1.60

Right Angle D-Sub. Conn.

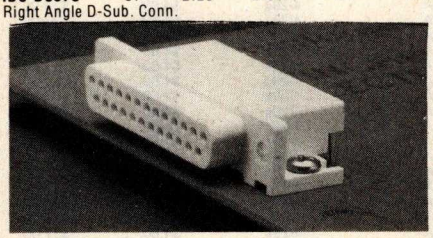

RIGHT ANGLE D-SUBMINATURE CONNECTOR


PART NO.	NO. OF PINS	1-9	10-24	25-99	100-249
IDCRADE9P	9	4.50	4.10	3.70	3.30
IDCRADE9S	9	4.70	4.30	3.90	3.50
IDCRADA15P	15	4.80	4.50	4.20	3.90
IDCRADA15S	15	5.10	4.90	4.70	4.40
IDCRADB25P	25	6.30	6.00	5.25	4.75
IDCRADB25S	25	6.75	6.40	5.50	5.00
IDCRADC37P	37	9.00	8.10	7.30	6.50
IDCRADC37S	37	11.50	10.60	9.50	8.50

subminiature toggle switches

6 Amps 125 VAC
7 Amps 30 VDC

	SPDT STANDARD TOGGLE	PRICE 1-9	10-24	25-99
CAL-ST11	(ON-NONE-ON)	$2.60	$2.40	$2.20
CAL-ST12	(ON-OFF-ON)	2.80	2.50	2.30
CAL-ST13	(MOM ON-OFF-MOM ON)	2.80	2.50	2.30
CAL-ST14	(ON-OFF-MOM ON)	2.80	2.50	2.30
CAL-ST15	(ON-NONE-MOM ON)	2.80	2.50	2.30

RS232 and "D" SUB-MINIATURE CONNECTORS




P = Plug, Male Type - S = Socket, Female Type - C = Cover, Hood

PART NO.	DESCRIPTION	PRICE 1-9	10-24	25-99
CND-DE9P	9 PIN MALE	$ 2.10	$ 1.90	$ 1.70
CND-DE9S	9 PIN FEMALE	$ 2.70	$ 2.40	$ 2.10
CND-DE9C	9 PIN COVER	$ 1.50	$ 1.25	$ 1.10
CND-DA15P	15 PIN MALE	$ 2.75	$ 2.45	$ 2.15
CND-DA15S	15 PIN FEMALE	$ 3.95	$ 3.60	$ 3.20
CND-DA15C	15 PIN COVER	$ 1.50	$ 1.30	$ 1.10
CND-DB25P	25 PIN MALE	$ 3.50	$ 3.25	$ 3.00
CND-DB25S	25 PIN FEMALE	$ 4.60	$ 4.35	$ 4.20
CND-DB51212	1 PC. GREY HOOD	$ 1.60	$ 1.45	$ 1.30
CND-P25H	2 PC. GREY HOOD	$ 1.50	$ 1.25	$ 1.10
CND-DB51226	2 PC. BLACK HOOD	$ 1.90	$ 1.65	$ 1.45
CND-DC37P	37 PIN MALE	$ 5.80	$ 5.10	$ 4.45
CND-DC37S	37 PIN FEMALE	$ 8.70	$ 7.70	$ 6.70
CND-DC37C	37 PIN COVER	$ 1.80	$ 1.55	$ 1.30
CND-DD50P	50 PIN MALE	$ 8.75	$ 7.75	$ 6.70
CND-DD50S	50 PIN FEMALE	$11.65	$10.25	$ 8.90
CND-DD50C	50 PIN COVER	$ 2.00	$ 1.80	$ 1.60
CND-D20418	HARDWARE SET 2 PR.	$ 1.00	$ 0.80	$ 0.70
CND-RS2328F	RS232, DB25P, EIA CLASS 1 CABLE 8 CON. 8 FT.	$19.95	$17.95	$15.95
CND-5730360	CENT. 700 SERIES PRINTER CONNECTOR	$ 9.00	$ 7.50	$ 6.00


FLEX-COM

Edgecard Connector



PART NO.	NO. OF PINS	PRICE 1-9	10-24	25-99	100-249
IDC-20CE	10/20	4.35	4.15	3.75	3.30
IDC-26CE	13/26	5.00	4.75	4.30	3.80
IDC-34CE	17/34	6.00	5.70	5.10	4.50
IDC-40CE	20/40	6.90	6.50	5.80	5.25
IDC-50CE	25/50	7.25	7.00	6.30	5.40

Socket Connector

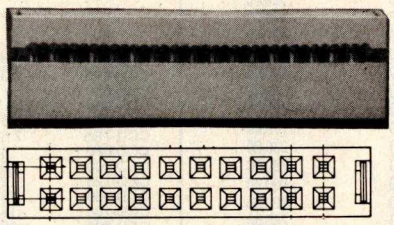

PART NO.	NO. OF PINS	PRICE 1-9	10-24	25-99	100-249
IDC-20SKT	10/20	2.75	2.50	2.25	2.00
IDC-26SKT	13/26	3.50	3.20	2.85	2.30
IDC-34SKT	17/34	4.50	4.20	3.75	3.30
IDC-40SKT	20/40	5.40	5.00	4.50	3.90
IDC-50SKT	25/50	6.50	6.00	5.40	4.75

Header Connector



Right Angle Soldertail GOLD Header


PART NO.	1-9	10-24	25-99	100-249
IDC-RAH 20ST	1.90	1.60	1.45	1.30
IDC-RAH 26ST	2.25	2.00	1.80	1.60
IDC-RAH 34ST	2.95	2.60	2.35	2.10
IDC-RAH 40ST	3.60	3.00	2.70	2.40
IDC-RAH 50ST	4.30	3.60	3.25	2.90

RIGHT ANGLE WIRE WRAP GOLD HEADER

PART NO.	1-9	10-24	25-99	100-249
IDC-RAH 20WW	4.15	3.60	3.25	2.90
IDC-RAH 26WW	5.30	4.30	3.90	3.50
IDC-RAH 34WW	5.95	5.00	4.75	4.50
IDC-RAH 40WW	7.00	6.00	5.40	4.80
IDC-RAH 50WW	7.95	6.80	6.20	5.50

STRAIGHT SOLDERTAIL GOLD HEADER

PART NO.	NO. PINS	1-9	10-24	25-99	100-249
IDCSTH20ST	10/20	1.85	1.55	1.40	1.30
IDCSTH26ST	13/26	2.20	1.95	1.75	1.55
IDCSTH34ST	17/34	2.90	2.55	2.30	2.05
IDCSTH40ST	20/40	3.55	2.95	2.65	2.40
IDCSTH50ST	25/50	4.25	3.55	3.20	2.85



STRAIGHT WIRE WRAP GOLD HEADER

PART NO.	NO. PINS	1-9	10-24	25-99	100-249
IDCSTH20WW	10/20	4.20	3.55	3.20	2.85
IDCSTH26WW	13/26	5.25	4.25	3.85	3.45
IDCSTH34WW	17/34	5.90	4.95	4.70	4.45
IDCSTH40WW	20/40	6.95	5.95	5.35	4.75
IDCSTH50WW	25/50	7.90	6.75	6.15	5.45

HEADER CONNECTOR EJECTOR

The IDCEJ provides an ejector and positive lock for socket connectors when used with any of the header connectors listed. Easy installation and low cost provide easy extraction, when desired, for your IDC socket interconnects. Order 2 for each connector.

PART NO.	QTY.	PRICE
IDCEJ5	pkg 5	$1.00
IDCEJC	pkg 100	$10.00

IDC System

RIBBON CABLE




Color Coded Laminated Cable for Insulation Displacement 28 Guage, 7 Strand

PART NO.	NO. OF CONDUCTORS	PRICE PER SPOOL 10 Ft.	100 Ft.
IDC-09CC	9	3.80	30.00
IDC-14CC	14	4.75	40.00
IDC-16CC	16	5.50	45.00
IDC-20CC	20	7.00	60.00
IDC-25CC	25	8.50	72.00
IDC-26CC	26	8.50	72.00
IDC-34CC	34	11.00	100.00
IDC-40CC	40	13.00	115.00
IDC-50CC	50	16.00	145.00


GRAY LAMINATED CABLE FOR INSULATION DISPLACEMENT 28 Gauge 7 Strand

PART NO.	NO. OF CONDUCTORS	PRICE PER SPOOL 10 Ft.	100 Ft.
IDC-09GY	9	2.50	18.05
IDC-14GY	14	3.50	28.00
IDC-16GY	16	4.00	32.00
IDC-20GY	20	4.80	40.00
IDC-25GY	25	6.00	50.00
IDC-26GY	26	6.00	50.00
IDC-34GY	34	8.30	66.00
IDC-40GY	40	10.00	77.00
IDC-50GY	50	12.00	95.00




Dip Plugs


PART NO.	NO. OF PINS	1-9	10-24	25-99	100-249
IDC-14DP	14	1.50	1.40	1.25	1.10
IDC-16DP	16	1.70	1.60	1.45	1.30
IDC-24DP	24	2.50	2.20	2.00	1.80



TRANSITION CONNECTOR

PART NO.	NO. OF PINS	PRICE 1-9	10-24	25-99	100-249
IDCTRNS10	10	2.00	1.60	1.10	1.00
IDCTRNS16	16	2.20	1.80	1.30	1.10
IDCTRNS20	20	2.50	2.00	1.40	1.25
IDCTRNS26	26	3.00	2.40	1.80	1.50
IDCTRNS34	34	4.00	3.10	2.20	2.00
IDCTRNS40	40	4.50	3.50	2.50	2.25
IDCTRNS50	50	5.50	4.40	3.10	2.50






INSTALLATION/ASSEMBLY TOOLS

IDC-1080	Arbor Press with Ram for all connectors *except* D-Subminiature order platens below. 12 LBS.	$180.00
IDC-013031	Platen & Ram for D-Subminiature Connectors	$ 50.00
IDC-1083	Platen for Edgecard Connector	$ 35.00
IDC-10811	Platen for Socket Connector	$ 35.00
IDC-1096	Platen for 24 Pin Dip Plug only	$ 35.00
IDC-10871	Platen for 14 & 16 Pin Dip Plug only	$ 35.00
IDC-1084	Platen for Transition Connector SH. WT. 1 LB.	$ 35.00

PLEASE ORDER BY PART NUMBER

Texas Instruments

FACE GRIP LOW PROFILE SOLDER TAIL DIP SOCKETS C85 SERIES



- Face grip design provides maximum retention force
- Anti-wicking feature
- Redundant contact points

SPECIFICATIONS


Material:
A. Body—94V-0 polyester
B. Contact—copper nickel alloy
C. Finish—200 microinches tin alloy (min.)stripe

NOTES:
A. Operating temperature—40°C to +100°C
B. Contacts have redundant spring elements
C. Accommodates standard IC leads up to .014 thick and .025 wide
D. Contact is designed and oriented to the insulator to grasp the broad "face" of the IC lead, allowing for low insertion and high retention forces
E. Socket is designed to achieve maximum density on boards
F. Sockets may be mounted end to end on .100" centers continuous line or on .400" centers row to row
G. Socket is designed to prevent IC leads from contacting PC board
H. Closed entry feature - along with chamfered side walls - provided to facilitate automatic IC insertion and protect the IC leads against damage.
I. Strengthened socket legs allow for automatic socket insertion into PC board
J. Anti-wicking feature built into contact leg
K. Design to achieve outstanding insertion/withdrawal characteristics

PART NO.	PINS	PRICE 1-9	10-49	50-99	100-499	500-999	1,000+
TIS-08LP	08	N/A	.15	.10	.08	.07	.06
TIS-14LP	14	N/A	.18	.15	.14	.12	.11
TIS-16LP	16	N/A	.20	.18	.16	.13	.12
TIS-18LP	18	.30	.25	.22	.18	.15	.13
TIS-20LP	20	.30	.25	.23	.20	.17	.145
TIS-22LP	22	.35	.30	.25	.22	.19	.17
TIS-24LP	24	.40	.35	.30	.24	.20	.18
TIS-28LP	28	.45	.40	.35	.28	.24	.21
TIS-40LP	40	.50	.45	.42	.40	.35	.31

*MINIMUM ORDER $1.00 Per Line item


DIP PLUGS



PART NO.	PINS	PRICE 1-9	10-24	25-99	100-249
KNX-08DP	8	.50	.45	.43	.40
KNX-14DP	14	.65	.60	.58	.55
KNX-16DP	16	.70	.65	.62	.58
KNX-24DP	24	1.15	1.05	.90	.95
KNX-40DP	40	1.90	1.70	1.60	1.50

Socket and Dip Plug priced based on gold not exceeding $700 per oz.

ZERO INSERTION FORCE TEST SOCKETS




	1-9	10-24	25-99
ZIP-16DIP	$5.50	5.35	4.95
ZIP-24DIP	$7.50	7.25	6.95
ZIP-40DIP	$10.25	9.85	9.50

• Zero insertion pressure (ZIP) insertion and extraction. • Wide entry holes to accommodate maximum number of device types. • Contact exit on even .100 spacing for convenience in board mounting. • Built in "stop" for cam handle prevents "overthrow" causing plastic damage. • Top mount assy. Screws for ease of replacement of worn or damaged internal components. • General redesign of original ZIP DIP incorporating improvements designed to extend life and reliability.

ROBINSON NUGENT, INC.


IYN SERIES GOLD 3 LEVEL WIRE WRAP SOCKETS




- Deep Chamfered Closed Entry Contacts
- RN Side Wipe Contact Design
- Terminal Barbs Allow Self-lock into PC Board
- Rugged Socket Body Design

PART NO.	PINS	PRICE* 1-9	10-24	25-99	100-249	250-999
RNS-08WWG	8	.50	.42	.40	.37	.33
RNS-14WWG	14	.60	.49	.47	.45	.42
RNS-16WWG	16	.65	.52	.50	.47	.44
RNS-18WWG	18	.85	.75	.70	.65	.60
RNS-20WWG	20	1.00	.90	.80	.75	.70
RNS-22WWG	22	1.25	1.15	1.10	1.05	1.00
RNS-24WWG	24	1.25	1.15	1.10	1.05	1.00
RNS-28WWG	28	1.60	1.50	1.40	1.30	1.20
RNS-40WWG	40	1.85	1.65	1.55	1.45	1.35

Socket prices based on gold not exceeding $700 per oz.





RN ICA HIGH RELIABILITY WIRE WRAP SOCKET

• 30 μ inch gold contact • Pin socket contacts for high reliability and high retention mounting holes • End and side stackable • 3-Level wrap • Low profile body with.

PART NO.	PINS	PRICE 1-9	10-24	25-99	100-249	250-999
RNH-08HRW	8	1.10	1.00	.90	.86	.77
RNH-14HRW	14	1.65	1.55	1.45	1.30	1.15
RNH-16HRW	16	1.85	1.65	1.55	1.40	1.25
RNH-18HRW	18	2.10	1.90	1.85	1.65	1.60
RNH-20HRW	20	2.45	2.10	2.00	1.80	1.70
RNH-22HRW	22	2.55	2.30	2.10	2.00	1.90
RNH-24HRW	24	2.75	2.50	2.20	2.10	2.00
RNH-28HRW	28	3.25	3.00	2.60	2.50	2.40
RNH-40HRW	40	4.50	4.25	4.00	3.60	3.40

PRECUT WIRE WRAP WIRE
PRECUT WIRE SAVES TIME AND COSTS LESS THAN WIRE ON SPOOLS

Kynar precut wire. All lengths are overall, including 1" strip on each end. Colors and lengths cannot be mixed for quantity pricing. Choose from colors **Red** (R), **Blue** (U), **Black** (B), and **Yellow** (Y).

PRECUT WIRE 100 PACK

PART NO.	LENGTH	100/Bag	PART NO.	Length	100/Bag
PGP025C*	2.5"	$1.25	PGP055C*	5.5"	1.58
PGP030C*	3.0"	1.30	PGP060C*	6.0"	1.65
PGP035C*	3.5"	1.37	PGP070C*	7.0"	1.99
PGP040C*	4.0"	1.42	PGP080C*	8.0"	2.14
PGP045C*	4.5"	1.48	PGP090C*	9.0"	2.24
PGP050C*	5.0"	1.54	PGP100C*	10.0"	2.39

PRECUT WIRE 500 PACK


PART NO.	LENGTH	500/Bag	PART NO.	LENGTH	500/Bag
PGP025D*	2.5"	$3.58	PGP055D*	5.5"	5.38
PGP030D*	3.0"	3.86	PGP060D*	6.0"	5.66
PGP035D*	3.5"	4.15	PGP070D*	7.0"	6.76
PGP040D*	4.0"	4.44	PGP080D*	8.0"	7.38
PGP045D*	4.5"	4.74	PGP090D*	9.0"	8.11
PGP050D*	5.0"	5.04	PGP100D*	10.0"	8.71

*Specify color when ordering. **Red** (R), **Blue** (U), **Black** (B), & **Yellow** (Y).

Example: If you wish to order (2) pkg. 500, 4", Red:

2	PGP040DR	4.44	8.88

PRECUT WIRE KIT ASSORTMENTS



PGPWK1* $9.95

CONTAINS			
250	3"	100	4½"
250	3½"	100	5"
100	4"	100	6"

PGPWK2* $24.95

CONTAINS			
250	2½"	250	5"
500	3"	100	5½"
500	3½"	250	6"
500	4"	100	6½"
250	4½"	100	7"

PGPWK3* $32.95


CONTAINS			
500	2½"	500	4½"
500	3"	500	5"
500	3½"	500	5½"
500	4"	500	6"

PGPWK4* $59.95

CONTAINS			
1000	2½"	1000	4½"
1000	3"	1000	5"
1000	3½"	1000	5"
1000	4"	1000	6"

Wire kit assortments are available in the 4 colors mentioned along with a rainbow assortment. Use color code (A) for the rainbow assortment
Example: If you wish to order one wire kit 3 in blue.

1	PGPWK3U	32.95	32.95



SPOOLED 30 GAUGE KYNAR

PART NO.	SPOOL LENGTH	1-4	5-9
PGS050*	50 ft.	1.99	1.85
PGS100*	100 ft.	3.65	3.50
PGS250*	250 ft.	5.75	5.50
PGS500*	500 ft.	10.20	9.95
PGS1000*	1000 ft.	17.95	15.95

Example: If you wish to order 400 ft. of yellow:

4	PGS100Y	3.65	14.60

*Specify color when ordering, **Red** (R), **Blue** (U), **Black** (B), **Yellow** (Y), & for wire kits *only* rainbow **assortment** (A).

PRIORITY ONE ELECTRONICS

Texas Instruments Gold Plated Edgeboard Connectors

Standard But Not Ordinary


The H4 Series standard edgeboard connectors offer the best value in the edgeboard market today.

To assure reliable electrical connections, our cantilever contacts are pre-loaded for optimum normal force and bifurcated for redundancy; each contact point features from 50 (Wire Wrap*) to 75 (solder tail) microinches (minimum) of wrought gold inlay over a nickel diffusion barrier. The inlay is metallurgically bonded to a copper-nickel-tin alloy (CA 725) that is suited to both soldered and wire wrapped terminations. The dielectric contact-housing is made of glass-filled thermoplastic polyester, meeting U.L. Flammability Classification 94V-0.


FEATURES

RELIABLE, COST-EFFICIENT CONTACT DESIGN
- 50 (Wire Wrap) to 75 (solder tail) microinches gold inlay over a nickel diffusion barrier (minimum thickness).
- Copper-nickel-tin CA 725 Alloy.
- Bifurcated contact points.
- Preloaded, cantilever spring design.
- Contacts are user removable.


RUGGED BODY
- Glass-filled thermoplastic polyester — Meets U.L. Flammability Classification 94V-0. — Resists common cleaning solvents.
- Solder standoff — Facilitates cleaning — Reduces solder wicking
- Between contact polarization key (snaplock for .100" & .125" centers).
- Generous chamfered card slot.
- Molded contact identification — Alphanumeric (.156" centers) — Numeric (.100" & .125" centers).
- Location ridges (bottom) and raised dots (top) mark every fifth contact position.
- Entire connector design is U.L. Approved.





The new TI .100" x .200" H4 Series Edgeboard Connector



The new TI .125" x .250" H4 Series Edgeboard Connector







ABBREVIATIONS:
ST — Solder Tail Gold
WW — Wire Wrap Gold

TI EDGE CONNECTORS

.1" Contact Centers: ST - Soldertail GOLD; WW - Wire Wrap GOLD

PART NO.	PRICE 1-9	10-24	25-99	100-249
TIC-1530-1 ST	1.60	1.45	1.30	1.10
TIC-1530-1 WW	1.70	1.55	1.35	1.15
TIC-1836-1 ST	2.00	1.80	1.60	1.40
TIC-1836-1 WW	2.10	1.90	1.65	1.45
TIC-2244-1 ST	2.25	2.00	1.75	1.50
TIC-2244-1 WW	2.40	2.15	1.90	1.60
TIC-2550-1 ST	2.50	2.25	2.00	1.65
TIC-2550-1 WW	2.70	2.45	2.15	1.80
TIC-3060-1 ST	2.95	2.60	2.30	1.90
TIC-3060-1 WW	3.20	2.85	2.55	2.20
TIC-3672-1 ST	3.30	2.95	2.60	2.30
TIC-3672-1 WW	3.90	3.50	3.10	2.60
TIC-4080-1 ST	3.60	3.25	2.85	2.40
TIC-4080-1 WW	4.40	4.00	3.60	3.00
TIC-4386-1 ST	3.90	3.50	3.10	2.60
TIC-4386-1 WW	4.65	4.15	3.70	3.10
TIC-50100-1 ST	4.50	4.05	3.60	3.00
TIC-50100-1 WW	5.40	4.90	4.30	3.60

.125" Contact Centers: STG - Soldertail GOLD; WWG - Wire Wrap GOLD

PART NO.	PRICE 1-9	10-24	25-99	100-249
TIC-2244-2 ST	2.30	2.10	1.85	1.50
TIC-2244-2 WW	2.60	2.35	2.10	1.75
TIC-2856-2 ST	2.80	2.55	2.25	1.85
TIC-2856-2 WW	3.20	2.90	2.55	2.15
TIC-3060-2 ST	2.90	2.60	2.30	1.95
TIC-3060-2 WW	3.40	3.05	2.70	2.25
TIC-3162-2 ST	3.05	2.75	2.45	2.05
TIC-3162-2 WW	3.50	3.15	2.80	2.35
TIC-3672-2 ST	3.45	3.10	2.75	2.30
TIC-3672-2 WW	4.00	3.60	3.20	2.68
TIC-4080-2 ST	3.80	3.45	3.05	2.55
TIC-4080-2 WW	4.45	4.00	3.55	2.95
TIC-4488-2 ST	4.20	3.80	3.35	2.80
TIC-4488-2 WW	4.85	4.35	3.90	3.20
TI-S100 ST	**3.20**	**2.90**	**2.50**	**2.20**
TI-S100 WW	**4.00**	**3.75**	**3.50**	**3.25**

Sullins Gold Plated Edgeboard Connectors

E — Eyelet Gold S — Solder Tail Gold
W — Wire Wrap Gold

Sullins Electonics was the first manufacturer to pioneer the use of Valox,* a polyester, as an insulator material. The quality and performance of this material has been a prime reason for the outstanding success of this connector line. Sullins connectors are unique in being recognized by Underwriters Laboratories. This is especially important to customers fabricating UL approved devices.

.156" CONTACT CENTER CONNECTORS

CAT. PART NO.	APPLICATION	1-9	10-24	25-99
SUL-612S5	PET, MA1003	1.95	1.80	1.55
SUL-612E5	PET, MA1003	2.30	2.00	1.75
SUL-1020E5		2.00	1.77	1.53
SUL-1224E5	COMMODORE PET	3.60	3.20	2.80
SUL-1224S5	COMMODORE PET	3.30	2.90	2.50
SUL-1530E5	VECTOR PLUGBOARDS, GRI KEYBOARDS	3.30	2.90	2.50
SUL-1530S5	VECTOR PLUGBOARDS, GRI KEYBOARDS	3.50	3.05	2.65
SUL-1530W5	VECTOR PLUGBOARDS, GRI KEYBOARDS	2.40	2.10	1.85
SUL-1836E5		3.70	3.25	2.80
SUL-1836S5		3.40	3.00	2.60
SUL-2244E5	VCT-3662, VCT-3682, AIM-65	3.90	3.45	3.00
SUL-2244S5	SYM, VCT-3677, KIM	4.10	3.60	3.15
SUL-2244W5	VECTOR PLUGBOARDS, SYM, KIM, AIM-65	4.20	3.70	3.20
SUL-2550E5		5.30	4.65	4.05
SUL-3672E5		8.30	7.30	6.35
SUL-3672S5		7.25	6.40	5.55
SUL-3672W5		7.40	6.55	5.65
SUL-4386E5	MOT6800, INTEL MULTIBUSS	8.25	7.30	6.30
SUL-4386S5	NSC PACER, VCT-4608(1)	8.25	7.30	6.30
SUL-4386W5	VCT-4611(1)(2), INTEL MULTIBUSS	8.80	7.75	6.75

.125" CONTACT CENTER CONNECTORS

CAT. PART NO.	APPLICATION	1-9	10-24	25-99
SUL-2856W2	PROLOG STD BUSS, VCT-4610(1)(2)	6.60	5.80	5.05
SUL-2856S2	PROLOG STD BUSS, VCT-4610(1)(2)	5.50	4.85	4.20
SUL-3672W2		6.30	5.55	4.80
SUL-4080W2	VCT-4380 PLUGBOARD	7.00	6.20	5.35
SUL-S100ALT	.140" SPACED ROWS FOR ALTAIR	7.80	6.90	6.00
SUL-S100SEG	S-100 SOLDER EYELET	7.95	7.60	6.60
SUL-S100STG	.250" SPACED ROWS, IMSAI, VCT-8803, CROMEMCO	5.95	5.40	4.70
SUL-S100WWG	S-100 WIRE WRAP	6.50	5.75	4.95
SUL-CG1	IMSAI STYLE CARD GUIDE		1.00 Pkg of 5	
SUL-CG1/C	IMSAI STYLE CARD GUIDE		15.00 Pkg of 100	

Materials & Characteristics
Insulator: Glass filled thermoplastic polyester, color: Blue.
Insulation Resistance: 5000 megoms.
Solvent Resistance: Perchloroethylene, Freon 113, Freon 11, Trichloroethylene.
Contacts: Phosphor Bronze.
Operating Voltage: .100 (2.54) .125 (3.17) .150 (3.81) .156 (3.96) contact centers
(At sea level) 600 VDC 800 VDC 1500 VDC 1800 VDC
Current Rating: 5 amperes.
Voltage Drop: 30 MV at rated current.
Contact Resistance: 10 milliohms maximum.
Operating Temperature: -65°C to +125°C
Board Thickness Accommodated: .062 inch (1.57mm)
Board Insertion: 2 to 16 ozs per contact pair using .062 (1.57mm) steel test blade.

.1" CONTACT CENTER CONNECTORS

CAT. PART NO.	APPLICATION	1-9	10-24	25-99
SUL-1020E1		2.90	2.55	2.20
SUL-1020W1		2.80	2.45	2.15
SUL-1326E1	VCT-4608, SDSSBC-100, IMSAI M10, S10	3.00	2.65	2.30
SUL-1530E1		3.75	3.30	2.90
SUL-1530S1		3.60	3.20	2.80
SUL-1530W1		3.75	3.30	2.90
SUL-2040E1	TRS-80, VCT-4609 PLUGBOARD	4.20	3.70	3.20
SUL-2040S1	TRS-80, VCT-4609 PLUGBOARD	3.90	3.45	3.00
SUL-2040W1	TRS-80, VCT-4609 PLUGBOARD	4.10	3.60	3.15
SUL-2244E1	VECTOR PLUGBOARDS	5.55	4.90	4.25
SUL-2244S1	VECTOR PLUGBOARDS	4.50	3.95	3.45
SUL-2244W1	VECTOR PLUGBOARDS	5.55	4.90	4.25
SUL-2550E1	SDS VERSAFLOPPY, INTEL MULTIBUSS	6.10	5.40	4.70
SUL-2550S1	SDS VERSAFLOPPY, APPLE II	5.95	5.20	4.55
SUL-2550W1	VECTOR 4609, IMSAI P10	6.00	5.30	4.60
SUL-3060E1	INTEL MULTIBUSS, VCT-4608 (1)	6.60	5.85	5.10
SUL-3060S1	INTEL MULTIBUSS, VCT-4608 (1)	6.35	5.60	4.90
SUL-3060W1	INTEL MULTIBUSS, VCT-4608 (1)	6.20	5.50	4.75
SUL-3672E1	VCT-3719(1)(4), VCT-4493(1)	8.00	7.10	6.10
SUL-3672S1	VCT-4494(1), VCT-3719(1)(4)	7.40	6.55	5.65
SUL-3672W1	VCT-4493(1), VCT-4494(1)	7.95	7.00	6.10
SUL-4080E1	COMMODORE PET	7.40	6.55	5.70
SUL-4080S1	COMMODORE PET	7.40	6.55	5.70
SUL-4080W1	COMMODORE PET	8.35	7.40	6.40
SUL-4386E1	COSMAC ELF	7.80	6.90	6.00
SUL-4386S1	COSMAC ELF	9.30	8.25	7.15
SUL-4386W1	COSMAC ELF	9.60	8.50	7.35
SUL-50100E1	ELF PRODUCTS	9.40	8.30	7.20
SUL-50100S1	ELF PRODUCTS	9.45	8.35	7.25
SUL-50100W1	ELF PRODUCTS	8.50	7.50	6.50



GOLD S-100 CONNECTORS

PRIORITY ONE distributes the TI S-100 Card Edge Connectors at tremendous volume for prices others only wish they could duplicate.

Part No.	SOLDER TAIL PRICE 1-9	10-24	25-99	100-249	Part No.	WIRE WRAP PRICE 1-9	10-24	25-99	100-249
TI-S100 STG	3.20	2.90	2.50	2.20	TI-S100 WWG	4.00	3.75	3.50	3.25

Connector pricing based on gold not exceeding $700.00 per oz.

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS

WIRE WRAPPING TOOLS AND WIRE



"HOBBY" WIRE WRAPPING TOOL BATTERY POWERED

For .025" (0.63mm) sq. post "MODIFIED" wrap, positive indexing, anti-overwrapping device.

OKM-BW2630	TOOL	$19.95
OKM-BC1	BATTERIES AND CHARGER	$11.00
OKMBT-30	BIT FOR AWG 30	$3.95
OKMBT-2628	BIT FOR AWG 26-28	$7.95

USE "C" SIZE NI CAD BATTERIES NOT INCLUDED



HOBBY WRAP TOOLS

Wire-wrapping, stripping, unwrapping tool for AWG 30 on .025 (0.63mm) Square Post

OKM-WSU-30M	MODIFIED WRAP	$7.95



TRI-COLOR DISPENSER

- 3 Rolls of Wire in one dispenser.
- 3 Colors: Blue, White, Red, 50 ft. of each color.
- AWG 30 (0,25mm) KYNAR® Insulated Wire.
- Built-in Plunger cuts wire to desired length.
- Built-in Stripper strips 1" of insulation.
- Refillable (for refills, see below).

OKM-WD-30-TRI	TRI-COLOR DISPENSER	$7.95



TRI-COLOR DISPENSER REPLACEMENT ROLLS

- AWG 30 (0,25mm) KYNAR® Insulated Wire.
- 3 Colors: Blue, White, Red, 50 ft. each color.
- Silver plated, solid conductor, easy stripping.

OKM-R-30-TRI	REPLACEMENT ROLLS	$5.95

DIP IC INSERTION TOOLS WITH PIN STRAIGHTNER



Narrow profile permits tool to work on densely spaced patterns, while unique insertion mechanism assures accuracy as well as excellent "feel". Finally, the tool includes a remarkable pin straightener built into the handle. Simply insert the IC, rock it on the straightening saddle, and push down on the tool. An automatic ejector delivers the IC ready to be placed in the insertion end for installation in your board or socket.

OKM-INS-1416	14-16 PIN DIP/IC INSERTER	$3.49

Ground strap may be easily attached for highly sensitive MOS & CMOS IC's. Durable chrome plated ABS construction features precision parts for long life and easy one-hand operation. (Ground strap not included.)

OKM-MOS-1416	14-16 PIN MOS CMOS SAFE INSERTER	$7.95
OKM-MOS-2428	24-28 PIN MOS CMOS SAFE INSERTER	$7.95




36-40 PIN CMOS-SAFE IC INSERTION TOOL

Unique new insertion tool. Also aligns bent-out pins. A twist of the handle compresses the pins to proper .600 inch spacing and locks the IC into the tool. Then simply place the tool on the socket and depress the plunger for instant and accurate insertion. Features heavy chrome plating throughout for reliable static dissipation. Includes terminal lug for attachment of ground strap.

GROUND STRAP NOT INCLUDED


OKM-MOS-40	36-40 PIN CMOS SAFE INSERTION TOOL	$7.95



DIP IC EXTRACTOR TOOL

The EX-1 Extractor is ideally suited for hobbyist or lab engineer. Featuring one piece spring steel construction. It will extract all LSI, MSI and SSI devices of from 8 to 24 pins.

OKM-EX-1	EXTRACTOR TOOL	$1.49



WK-7 IC INSERTION

OKM-WK-7	COMPLETE IC INSERTER/EXTRACTOR KIT INDIVIDUAL COMPONENTS	$29.95
OKM-MOS-1416	14-16 PIN MOS CMOS SAFE INSERTER	$7.95
OKM-MOS-2428	24-28 PIN MOS CMOS SAFE INSERTER	$7.95
OKM-MOS-40	36-40 PIN MOS CMOS SAFE INSERTER	$7.95
OKM-EX-1	14-16 PIN EXTRACTOR TOOL	$1.49
OKM-EX-2	24-40 PIN CMOS SAFE EXTRACTOR TOOL	$7.95



WIRE DISPENSER

- With 50 ft. Roll of AWG 30 KYNAR® wire-wrapping wire.
- Built-in Plunger cuts wire to desired length.
- Built-in Stripper strips 1" of insulation.
- Refillable (For refills, see below)

OKM-WD-30-B	BLUE WIRE	$4.95
OKM-WD-30-Y	YELLOW WIRE	$4.95
OKM-WD-30-W	WHITE WIRE	$4.95
OKM-WD-30-R	RED WIRE	$4.95




DISPENSER REPLACEMENT ROLLS

Wire for wire-wrapping AWG-30 (0,25mm) KYNAR® wire. 50 ft. roll, silver plated, solid conductor, easy stripping.

OKM-R-30B-0050	30-AWG BLUE 50 FT. ROLL	$2.98
OKM-R-30Y-0050	30-AWG YELLOW50 FT. ROLL	$2.98
OKM-R-30Y-0050	30-AWG WHITE 50 FT. ROLL	$2.98
OKM-R-30R-0050	30-AWG RED 50 FT. ROLL	$2.98

*KYNAR-PENNWALT




"CLIP AND STRIP" TOOL

A unique new design for stripping 1" insulation from 30AWG wire. Insert wire, squeeze tool closed to cut off excess wire, pull wire through stripping slot to remove insulation. Handy pocket size, only 1¾" x 1" x ¾". Shipping Weight 4 oz.

OKM-CAS-130	CLIP AND STRIP	$1.98

THE ABOVE CUT AND STRIP TOOL IS NOT APPLICABLE FOR MYLENE OR TEFLON INSULATION




TERMINALS

- .025" (0,63mm) Square Post.
- 3 Level Wire-Wrapping.
- Gold Plated.

25 PER PACKAGE


OKM-WWT-1	SLOTTED TERMINAL	$4.98
OKM-WWT-2	SINGLE SIDED TERMINAL	$2.98
OKM-WWT-3	IC SOCKET TERMINAL	$4.98
OJM-WWT-4	DOUBLE SIDED TERMINAL	$1.98



TERMINAL INSERTING TOOL

For inserting WWT-1, WWT-2, WWT-3, and WWT-4 Terminals into .040" (1,0 mm) Dia. Holes.


OKM-INS-1	INSERTING TOOL	$2.49



P.C.B. TERMINAL STRIPS

The TS strips provide positive screw activated clamping action, accommodate wire sizes 14-30 AWG (1.8 - 0,25mm). Pins are solder plated copper, .042 inch (1mm) diameter, on .200 inch (5mm) centers.


OKM-TS-4	4-POLE	$1.69
OKM-TS-8	8-POLE	$2.59
OKM-TS-12	12-POLE	$3.49



MODULAR TERMINAL STRIPS

For versatile, economical connections especially in bread-boarding and short runs. Two circuit modules are dovetailed together in various combinations to form printed circuit board terminals with the desired number of circuits. Making stable, low-resistance connections with only a screwdriver, the space-saving terminals take conductors from 26 through 16 AWG conforming to .20 inch (5,08mm) hole spacing on boards up to .126 inch (3,20mm) thick.

OKM-TS-6MD	2-POLE	$1.79 (3 per package)




PC CARD GUIDES

TR-1 consists of 2 guides precision molded with unique spring finger action that dampens shock and vibration, yet permits smooth insertion or extraction. Guides accommodate any card thickness from .040-.100 inches.

QUANTITY — ONE PAIR (2 PCS.)

OKM-TR-1	CARD GUIDES	$1.89



PC CARD GUIDES & BRACKETS

TRS-2 kit includes 2 TR-1 guides plus 2 mounting brackets. Support brackets feature unique stabilizing post that permits secure mounting with only 1 screw.

QUANTITY — ONE SET (4 PCS.)

OKM-TRS-2	GUIDES & BRACKETS	$3.79

BW928 INDUSTRIAL WRAPPING TOOL



GREAT FOR PRODUCTION!

- Accepts Industrial Bits & Sleeves (Gardner Denver or equivalent)
- Auto-Indexing
- Modified Wrap
- Back-Force available (Recommended for #30)

Part No.	Description	Price
OKM-BW928	Tool	$49.95
OKM-BW928BF	Tool (with Backforce)	52.95
OKM-BT30I	#30 Bit & Sleeve	29.50
OKM-BC1	Batteries & Charger	11.00




JUST WRAP TOOL WITH ONE 50 FT. ROLL OF WIRE		
COLOR	PART NO.	U.S. LIST PRICE
BLUE	JW-1-B	$14.95
WHITE	JW-1-W	14.95
YELLOW	JW-1-Y	14.95
RED	JW-1-R	14.95

DAISY CHAIN — POINT TO POINT




JUST WRAP REPLACEMENT ROLLS

OKMR-JW-B	BLUE WIRE	50 ft. Roll	$2.98
OKMR-JW-W	WHITE WIRE	50 ft. Roll	$2.98
OKMR-JW-Y	YELLOW WIRE	50 ft. Roll	$2.98
OKMR-JW-R	RED WIRE	50 ft. Roll	$2.98



UNWRAP TOOL FOR JUST WRAP

OKM-JUW-1	UNWRAPPING TOOL	$3.49




JUST WRAP KIT

CONTAINS:

- JUST WRAP Tool
- Roll of Blue Wire, 50 ft.
- Roll of White Wire, 50 ft.
- Roll of Yellow Wire, 50 ft.
- Roll of Red Wire, 50 ft.
- Unwrapping Tool

OKM-JWK-6	JUST WRAP KIT	$24.95



PRB-1 DIGITAL LOGIC PROBE

Compatible with DTL, TTL, CMOS, MOS and Microprocessors using a 4 to 15V power supply. Thresholds automatically programmed. Automatic resetting memory. No adjustment required. Visual indication of logic levels, using LED's to show high, low, bad level or open circuit logic and pulses. Highly sophisticated, shirt pocket portable (protective tip cap and removable coil cord).

- DC to > 50 MHZ
- 10 Nsec. pulse response
- 120 K Ω impedance
- Automatic pulse stretching to 50 Msec.
- Automatic resetting memory
- Open circuit detection
- Automatic threshold resetting
- Compatible with all logic families 4-15 VDC
- Range extended to 15-25 VDC with optional PA-1 adapter
- Supply O.V.P. to ± 70 VDC
- No switches/no calibration

Shipping Weight 4 oz.


OKM-PRB-1	DIGITAL LOGIC PROBE	$36.95



VACUUM VISE

Unique vacuum based light duty vise for precision handling of small components and assemblies. Rugged ABS construction. 1½" (38mm) wide jaws, 1¼" (32mm) travel for maximum versatility. Also features screw lugs for permanent installation. (mounting screws included)

OKM-VV1	VACUUM VISE	$3.49



PC BOARD

The 4 x 4.5 x 1/16 inch board is made of glass coated EPOXY Laminate and features solder coated 1 oz. copper pads. The board has provision for a 22/44 two sided edge connector with contacts on standard .156 spacing. Edge contacts are non-dedicated for maximum flexibility.

The board contains a matrix of .040 in. diameter holes on .100 inch centers. The component side contains 76 two-hole pads that can accommodate any DIP size from 6-40 pins, as well as discrete components. Typical density is 18 of 14 Pin DIP's. Components may be soldered directly to the board or intermediate sockets may be used for soldering or wire-wrapping.

Two independent bus systems are provided for voltage and ground on both sides of the board. In addition, the component side contains 14 individual busses running the full length of the board for complete wiring flexibility. These busses enable access from edge contacts to distant components. These busses can also serve to augment the voltage or ground busses, and may be cut to length for particular applications.

OKM-H-PCB-1	HOBBY BOARD	$4.99



WIRE WRAPPING KIT WK-4

Contains: Hobby Wrap Tool WSU-30 M, Wire Dispenser WD-30-B, (2) 14 DIP's, (2) 16 DIP's, Hobby Board H-PCB-1, DIP IC Insertion Tool INS-1416, DIP IC Extractor Tool EX-1 and PC Edge Connector CON-1.


OKM-WK-4B(BLUE)	WIRE-WRAPPING KIT	$25.99

CA, AK, HI, CALL (213) 894-8171

PRIORITY ONE ELECTRONICS

Vector S-100 PRODUCTS


COMPATIBLE PLUGBOARDS FOR INTERFACE, MEMORY EXPANSION, EXPERIMENTATION

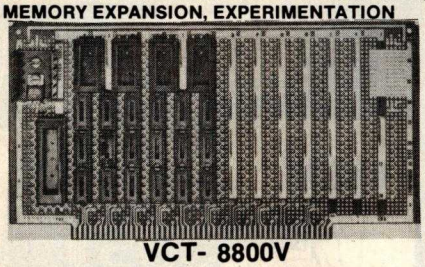

VCT- 8800V

Universal Microcomputer/processor plugboard, use with S-100 bus. Complete with heat sink & Hardware. 5.3" x 10" x 1/16."


1 - 4	5 - 9	10 - 24
$22.48	$20.37	$18.26

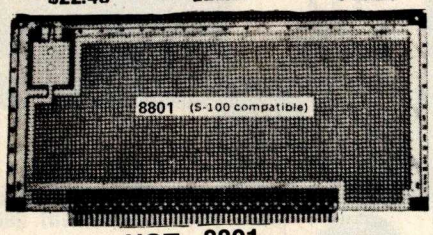

VCT- 8801

Individual tinned square pads surround most holes. Ideal for mounting components by "tack" soldering. Top of board pod free for mounting I/O connectors.


1 - 4	5 - 9	10 - 24
$23.12	$20.95	$18.78

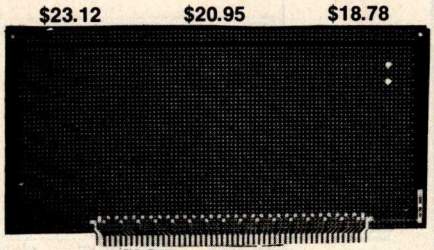

VCT- 8801-1

Plain no etched circuitry except contacts. Produces maximum flexibility.


1 - 4	5 - 9	10 - 24
$15.67	$14.24	$12.82



VCT- 8802-1

Pad per 2 holes. Two-hole pads allow tack soldering of socket, plus second hole for component leads.


1 - 4	5 - 9	10 - 24
$27.21	$24.63	$22.05

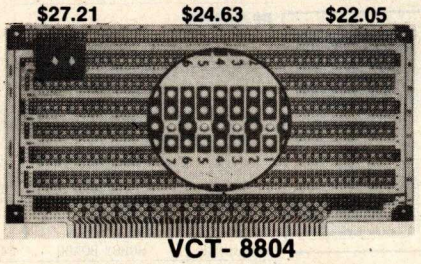

VCT- 8804

"ANY DIP" has full power and ground planes back to back. Boards accommodates .3, .4, .6, .9" Dips.

1 - 4	5 - 9	10 - 24
$24.67	$22.34	$20.02

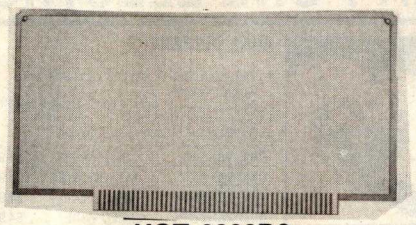


VCT-8800R2

- Make your own custom S-100-Bus circuit board.
- Just expose, develop and etch in lab or home.
- No camera or dark room needed.
- Coated both sides with copper and + Positive Photoresist.
- S-100-Bus card size: 5.3" x 10" x .062"
- Gold plated 50/100 contacts on .125" centers, continuous into copper fields both sides.
- Complete step-by-step instructions.
- Expose with bright sun or G.E. RS 275 watt suntan lamp.
- Two layout papers: 1 clear, 1 with 0.1" grid.

VCT-8800R2

1 - 9	10 - 49	50 - 99
$22.42	$20.32	$18.22


VCT-0088-21-45 developer for + Positive Photoresist, 6 oz. concentrate makes 30 fluid ounces, develops 2400 square inches. **$2.46**

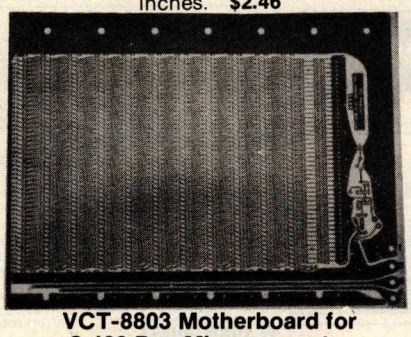

VCT-8803 Motherboard for S-100 Bus Microcomputer

Mounts 11 receptacles with 100 contacts or 10 receptacles plus interconnections to smaller boards for expansion. Connectors mount with tabs protruding through .038 inch (1 mm) diameter holes in rows spaced .250 inch (6.4 mm) on each connector position and 0.75 inch (19 mm) between connector positions. Includes etched circuit and instructions for active or passive terminations plus 12 tantalum capacitors for +5, +12, –12 volt buses, and spacers for mounting in Vector VP1 or VP2 case. G-10 epoxy glass board with 2 ounce copper, solder plated circuitry plus solder mask to avoid accidental short circuits. Large buses: +5V and GND (10 amps), +12V or 16V (7 amps). Current ratings are per MIL-STD-275 with 10° rise.

Shipping weight 2 pounds (.9kg) **$29.50**



VCT-3690-12 Card Extender

Card Extender has 100 contacts — 50 per side on .125 centers. Attached connector is compatible with S-100 Bus Systems.

1 - 4	5 - 24
$26.64	$24.18

VCT-3690 6.5" 22/44 pin .156 ctrs. Extender **$15.66**
VCT-3690-4 7.5" 36/72 pin .1 ctrs. Extender **$22.76**
VCT-3690-6 11" 22/44 pin .156 ctrs. Extender **$18.80**

21 pairs of nylon guides furnished for snap-in mounting on .25" multiples



VCT-CCK100 $49.80 Shipping Wt. 10 lbs.


RACH MOUNTABLE CAGE

Especially designed to accommodate S100 size Plugboards, Motorola Exorcisor,™ and Micromodule™ Plugboards. Cage has .081" thick anodized aluminum side walls. Will accommodate Plugboards 4.0" to 8.5" long and 10.0" to 11.5" wide by 1/16" thick. Cages assemble quickly.

*™Registered Motorola trademark

VECTOR-PAK ASSEMBLED MICROCOMPUTER CASES

VCT-VP2 - $159.00

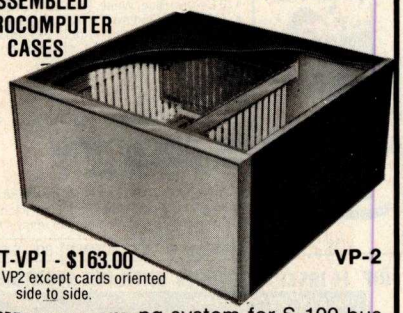

VCT-VP1 - $163.00
Same as VP2 except cards oriented side to side.


VP-2

Adjustable packaging system for S-100 bus microcomputers, compatible with Altair 8800 and IMSAI 8080 size cards.

- Smart looking, deluxe cases unmarred by unsightly screws or fasteners.
- Finished in dark blue textured vinyl.
- Instantly accessible interiors with slip out covers.
- Removable recessed rear and front panels.
- Fully adjustable interior mounting systems for any card or card spacing within size limitations. No cutting or drilling necessary.
- Perforated bottom cover for cooler operation.

DESCRIPTION

Assembled case with perforated bottom cover. Installed mounting struts for card guides and receptacles or motherboard. Cards top loaded, spanning front to back. Card guide (12 pair) and chassis plate supplied uninstalled. **Shipping Weight 25 lbs.**




VCT-BPI7/9 $10.95

INPUT/OUTPUT CONNECTOR REAR PANEL

- Ten connector cutouts for ITT Cannon DB25S Type 25 pin connector (connectors furnished by user).
- Panel may be installed with cutouts on either right or left side.
- Interchangeable with standard rear panel.
- Connectors may be slipped through the panel for ease of assembly or disassembly.

PLEASE ORDER BY PART NUMBER

Vector




VCT-3662	6.5" x 4.5"	**$ 8.69**
VCT-3662-2	9.6" x 4.5"	**$10.85**

P pattern plugboards for IC's Epoxy Glasss 1/16" 44 pin. con. spaced .156


VCT-3719-1 **$9.28**
Same as 3662 except 36/72 con. on .1 centers

VCT-3719-4 **$11.73**
Same as 3662-2 except 36/72 con. on .1 centers




VCT-3682	9.6" x 4.5"	**$13.63**
VCT-3682-2	6.5" x 4.5"	**$11.04**

Hi-Density Dual In-Line Plugboard for Wire Wrap with Power and Grd. Bus Epoxy Glass 1/16" 44 pin con. spaced .156

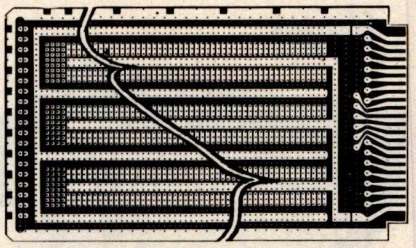

VCT-3677	9.6" x 4.5"	**$13.33**
VCT-3677-2	6.5" x 4.5"	**$10.68**

Gen. Purpose DIP Boards with Bus Pattern for Solder or Wire Wrap Epoxy Glass 1/16" 44 pin con. spaced .156



VCT-4493-1
4.5" x 9.6" Universal pattern for any .3;" .4;" .6;" .9;" spaced DIPS. Holds 63 Dips. Accommodates additional I/O connectors 36/72 con. on .1 centers.

1-4	5-9	10-24
$23.83	$21.55	$19.27

VCT-4494-1
Same as 4493 except 22/44 con. on .156 centers.

1-4	5-9	10-24
$20.68	$18.67	$16.67

VCT-4493
4.5" x 6.5" Universal pattern for any .3;" .4;" .6;" .9;" spaced DIPS. Accommodates additional I/O connectors 36/72 con. on .1 centers.

1-4	5-9	10-24
$19.37	$17.59	$15.80

VCT-4494
Same as 4493 except 22/44 con. on .156 centers.

1-4	5-9	10-24
$16.33	$14.79	$13.25

VCT-HA9
Pkg. of 4 **$1.26**
Ejector Card with Roll Pin

VCT-HA9C
Pkg. of 100 **$26.25**



WIRE WRAP POSTS (see next page)

Vector catalog is available to qualified industrial and institutional customers.




1/16 BOARD

Vector

.042 dia. holes on 0.1 spacing for IC's

Phenolic PART NO.	SIZE	PRICE 1-9	10-19
VCT-64P44-X	4.5" x 6.5"	$1.56	$1.40
VCT-169P44-X	4.7" x 17"	$3.69	$3.32
Epoxy Glass			
VCT-64P44	4.5" x 6.5"	$1.79	$1.61
VCT-84P44	4.5" x 8.5"	$2.21	$1.99
VCT-169P44	4.5" x 17"	$4.52	$4.07
VCT-169P84	8.5" x 17"	$8.83	$7.95




APPLE PLUGBOARD

Vector 4609 Peripheral Interface Plugboard for construction of custom circuits. Plug compatible with Apple II, Commodore PET and Super Kim microcomputers.

VCT-4609


1-4	5-9	10-24
$20.74	$18.79	$16.84



VCT-4607
DEC, LSI-11, PDP8, PDP11, Heath H-11, P Pattern Epoxy Glass, Plug Board 8.43" x 5.187" Dual 36 pin DEC/HEATH Connectors.

1-4	5-9	10-24
$16.26	$14.74	$13.21

MOTOROLA EXORCISER PROTOTYPING BOARDS

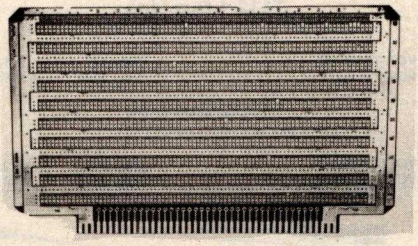


VCT-4611
3 hole pads interspersed with power busses (shown above).

1-4	5-9	10-24
$29.95	$26.96	$23.96

VCT-4611-1
Bare board except with edge connector. No power bussing.

1-4	5-9	10-24
$19.95	$17.96	$15.96




VCT-4611-2
Has only interspersed power busses.

1-4	5-9	10-24
$29.95	$26.96	$23.96


UNIVERSAL MICROCOMPUTER PLUGBOARDS

For STD Bus, Pro-Log Microprocessors and General Use. Size: 4.5" x 6.5" x .052" 28/56 contacts on .125" centers.

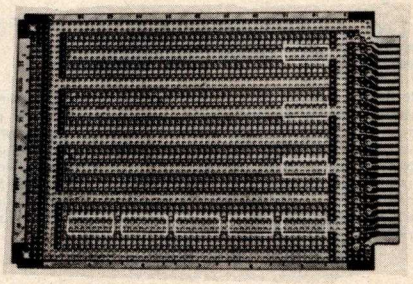


VCT-4610 for soldering or wire wrapping. Mounts 20 16 pin DIP ICs.

1-4	5-9	10-24
$18.95	$17.06	$15.16

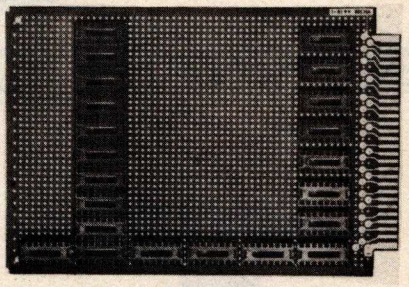


VCT-4610-1 for soldering or wire wrapping. Mounts 59 16 pin DIP ICs.

1-4	5-9	10-24
$15.95	$14.36	$12.76

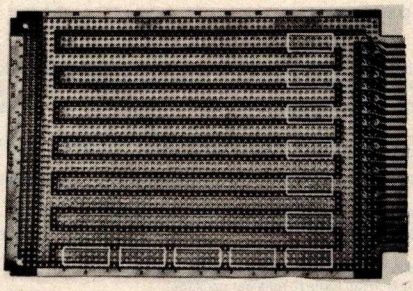

VCT-4610-2 wire wrapping board. Mounts 35 16 pin DIP ICs.

1-4	5-9	10-24
$18.95	$17.06	$15.16




VCT-4608
Form and size compatible with INTEL SBL80 Series and NATIONAL BLC 80 Series microcomputer boards. Power and Ground buses on both sides.

1-4	5-9	10-24
$59.23	$53.67	$48.11

VCT-4608-1
Same as 4608 except plain, less power buses.

1-4	5-9	10-24
$40.02	$36.52	$32.92



VCT-4350
Large Microprocessor development plugboard with Zig-Zag Buses 7" x 9.6" Holds 77 DIPs, 80 pin con. spaced .125.


1-4	5-9	10-24
$22.80	$20.69	$18.58

Vector SLIT-N-WRAP T.M.

Slit-N-Wrap is easy to use and is up to four times faster than ordinary manual wrapping because there is no wire measuring or pre-stripping required. Slit-N-Wrap tools have a patented action which slits wire insulation while the tools is wrapping wire on .025" square posts. Connections are just as reliable as with conventional wrapping tools. Tests show Slit-N-Wrapped connections exceed Mil Spec requirements for pull-off, are low resistance, and are gas tight. All tools and bits are guaranteed to provide at least 10,000 reliable wraps before bit replacement is required.

Slit-N-Wrap tools with Tefzel insulated wire

P184



Manual wrapping kit with knurled aluminum shaft, replaceable hardened steel bit, and 2 rolls of Tefzel wire.

VCT-P184 *1 lb.* **$30.00**



P184-4T1

Motorized Slit-N-Wrap kit, complete with rechargeable NiCad batteries and charger.

VCT-P184-4T *3 lbs.* **$105.00**

AC powered Slit-N-Wrap with pistol grip and trigger for industrial and production use.

VCT-P184-4T1 *3 lbs.* **$105.00**

Hardened steel replacement bit for P184 series.

VCT-P184A *1 lb.* **$16.95**

Tefzel insulate silver plated copper 28 gauge wire for P184 series Slit-N-Wrap tools (2 rolls per package).

VCT-W28-6A	*Green, 0.5 lbs.*	**$5.39**
VCT-W28-6B	*Red, 0.5 lbs.*	**$5.39**
VCT-W28-6E	*White, 0.5 lbs.*	**$5.39**
VCT-W28-6F	*Yellow, 0.5 lbs.*	**$5.39**

P180 Series Tools Using Polyurethane Nylon Coated Wire. Polyurethane nylon coated copper wire is used in all P180 series tools. The small diameter of this insulated 28 gage wire permits two 7-turn wraps on a 0.025 inch (.64 mm) square post occupying only .21 inch (5.3 mm) of post length. Soldering is not required on rectangular posts, but if wrapped on round or irregular posts it may be soldered using a 750°F (399°C) iron which melts the insulation as solder flow occurs.

Manual wrapping kit with 2 rolls of Polyurethane wire.

VCT-P180 *1 lb.* **$25.00**

Motorized Slit-N-Wrap kit, complete with rechargeable NiCad batteries and charger.

VCT-P160-4T *3 lbs.* **$99.50**

AC powered Slit-N-Wrap with pistol grip and trigger for industrial and production use.

VCT-P160-4T1 *3 lbs.* **$99.50**


Hardened steel replacement bit for P180 and P160 series.

VCT-P180A *1 lb.* **$14.25**

Polyurethane nylon insulated copper 28 guage wire for P180 and P160 series Slit-N-Wrap tools (3 rolls per package).

VCT-W28-2A	*Green, 0.5 lbs.*	**$2.89**
VCT-W28-2B	*Red, 0.5 lbs.*	**$2.89**
VCT-W28-2C	*Clear, 0.5 lbs.*	**$2.89**
VCT-W28-2D	*Blue, 0.5 lbs.*	**$2.89**


P160-1A UNWRAP TOOL



Unwrapping bit is recessed far enough into the sleeve (spring loaded) to permit unwrapping more than the maximum amount of turns on a 3 wrap post for 26-30 gage wire.

VCT-P160-1B **$12.50**

MICRO CLIP



Vector

For .042" dia. holes, (all boards on this page)

VCT-T42-1/C	**Pkg. of 100**	**$ 1.54**
VCT-T42-1/M	**Pkg. of 1000**	**$ 11.28**
VCT-P149 Hand installing tool		**$ 3.23**

WRAP POST



For .042" dia. holes, (all boards on this page). Bifurcated contacts for soldering components above board and .025" sq. wrap post below board.

T44 will accept a .021" max. dia. lead in bifurcated end, 3 level wrap post.

VCT-T44/C	**Pkg. of 100**	**$ 2.34**
VCT-T44/M	**Pkg. of 1000**	**$14.35**
A13 Hand installing tool		**$ 4.19**


T68 will accept a .032" max. dia. lead in bifurcated end, 3 level wrap post.

VCT-T68/C	**Pkg. of 100**	**$ 2.67**
VCT-T68/M	**Pkg of 1000**	**$16.40**
VCT-A13-1 Hand installing tool		**$ 4.15**

T68A will accept a .032" max. dia. lead in bifurcated end, 2 level wrap post.

VCT-T68A/C	**Pkg. of 100**	**$ 2.57**
VCT-T68A/M	**Pkg. of 1000**	**$14.50**
VCT-A13-1 Hand installing tool		**$ 4.15**

T46 SERIES WRAP POST



Feed-thru wrap post fits plated-thru or plain holes. Sharp Corners on these .025" sq. wrap post bite into wrapped wires for perfect connections.

VCT-T46-2-9/C	**Pkg. 100**	**$ 2.72**
VCT-T46-2-9/M	**Pkg. 1000**	**$20.46**
VCT-T46-3-9/C	**Pkg. 100**	**$ 2.74**
VCT-T46-3-9/M	**Pkg. 1000**	**$20.90**
VCT-T46-4-9/C	**Pkg. 100**	**$ 2.64**
VCT-T46-4-9/M	**Pkg. 1000**	**$16.91**
VCT-T46-5-9/C	**Pkg. 100**	**$ 3.58**
VCT-T46-5-9/M	**Pkg. 1000**	**$28.93**
VCT-T46-6-9/C	**Pkg. 100**	**$ 4.99**
VCT-T46-6-9/M	**Pkg. 1000**	**$42.96**
VCT-P133B Hand installing tool		**$ 3.03**



T107 Bus Strip **T112-1 Bus Link** **T112-2 Bus Link**

T107 Bus Strip

Used for supply busses on Vector board. Holes are .1" Centers 13" long.

VCT-T107	**Pkg. 10**	**$ 4.00**
VCT-T107/C	**Pkg. 100**	**$38.06**

T112-1 Bus Link


Fits over WW pin and connects pin to bus .2" long.

VCT-T112-1/C	**Pkg. 100**	**$ 1.93**
VCT-T112-1/M	**Pkg. 1000**	**$ 8.14**

T112-2 Bus Link

Same as T112-1 except .3" long.

VCT-T112-2/C	**Pkg. 100**	**$ 2.15**
VCT-T112-2/M	**Pkg. 1000**	**$10.95**



SOCKET PINS

Gold plated, machined socket pin for .042" dia. holes. (All boards on this page.) With 3 level wrap post.


VCT-R32	**Pkg. 25**	**$ 5.75**
VCT-R32/C	**Pkg. 100**	**$ 21.63**
VCT-R32/M	**Pkg. 1000**	**$202.95**
VCT-P158 Impact insertion tool		**$ 20.95**
VCT-D9 Die point for P158		**$ 4.05**



TRIFURCATED KLIP WRAP POST

For .010" to .040" diameter leads above board and .025" sq. 3 level wrap post below board for .042" dia. holes. (All boards on this page.)

VCT-T49/C	**Pkg. 100**	**$ 3.76**
VCT-T49/M	**Pkg. 1000**	**$22.70**
VCT-P156 Hand installing tool		**$ 3.52**



CCK13

6 lbs.

VECTOR-PAK CARD CAGES

19" rack mounting cages are supplied completely assembled, ready for connectors. Models listed accommodate 1/16" thick cards 4.5" maximum to 3" minimum width x 6.5" long. Heavy extruded aluminum cross members (T-Struts) provide strength and easy, infinitely variable connector spacing. 21 pairs of 4-40 connector mounting nuts are furnished installed.

Vector VCT-CCK-3 Card Cage — Has 108 grooves 0.075" wide for 1/16" circuit cards in extruded aluminum plates mounted top and bottom. Vertically and horizontally adjustable rear cross members have 21 pairs of 4-40 nuts in captive grooves for easy connector mounting. Net Each **$47.94**


Vector VCT-CCK-13 Card Cage — 19" wide x 5¼" high x 8.9" deep. Has 21 pairs of riveted anodized aluminum card guides. Net Each **$50.00**

Vector VCT-CCK13P Card Cage — Same as No. CCK13, except with riveted ABS plastic guides. Net Each **$50.00**

Vector VCT-CCK-14P Card Cages — 19" wide x 5¼" high x 12" deep. Has 21 pairs of riveted card ABS plastic card guides on 0.75" centers. Net Each **$57.63**

Vector VCT-CCK13S — Same as CCK-13, except for snap in card guides. Comes in kit form. Net Each **$41.00**

Vector

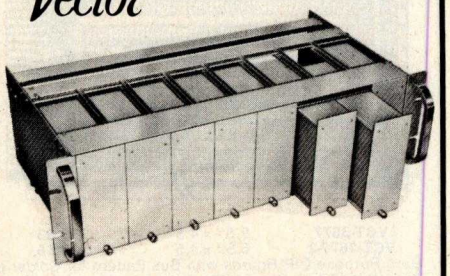


10 lbs.

The Vector Pak system is a coordinated packaging system which provides modular cases and cages for nearly all Vector Plugbords and many industry-standard plug-in boards. Adjustable rear struts mount almost any PC connector without hole drilling or special brackets. Other sizes and cage parts are available separately — write for catalog.

Vector VCT-CMA3A-20 Cage — 5¼" h. x 8.9" deep fits 19" racks. Holds eight 2" wide x 6½" long x 4.6" high modules (Vector No. EFP204A66). Net Each **$62.56**

Vector VCT-CMA4A-20 Cage — 5¼" h. x 12" deep fits 19" racks. Holds eight 2" wide x 9.6" long x 4.6" high modules (Vector No. EFP204A96). Net Each **$63.99**

Vector VCT-CMA3A-16 Cage — Same as No. CMA3A-20, except holds ten 1.6" wide x 6.6" long x 4.6" high modules (Vector No. EFP164A66). Net Each **$67.91**



2 lbs.

EFP MODULES

All-aluminum modules are anodized finished and have 5¼" high front panels with thumb screw, solid rear panels for connector mounting or circuit board slotting, rear sliding side covers, plus inner multiple-grooved top and bottom rails to hold 1/16" thick circuit boards without special bracketing.

Vector VCT-EFP164A66 Case — Has 6 circuit board grooves spaced 0.150" apart on top and bottom rails, holds circuit boards 4.5" wide x 6.5" maximum length inside. Net Each **$9.38**

Vector VCT-EFP204A66 Case — Same as No. EFP164A66, except has 9 circuit board grooves. Net Each **$9.65**

Vector VCT-EFP204A97 Case — Same as No. EFP164A66, except holds circuit boards 4.5" wide x 9.6" maximum length inside. Net Each **$11.07**

PRIORITY ONE ELECTRONICS

E-Z CIRCUIT™ by Bishop Graphics, Inc.

BLACK PRECISION SLIT PC ARTWORK TAPE



18 Yds./Roll

PRICE PER PACKAGE . . . $1.15

Tape Size in	Tape Size mm	Cat No.†
.015	0,38	BEZ010151
.020	0,51	BEZ010201
.026	0,66	BEZ010261
.031	0,79	BEZ010311
.040	1,02	BEZ010401
.050	1,27	BEZ010501
.062	1,57	BEZ010621
.080	2,03	BEZ010801
.093	2,36	BEZ010931
.100	2,54	BEZ011001
.125	3,18	BEZ011251
.200	5,08	BEZ012001
.250	6,35	BEZ012501

Donut Pads



Price per Package $1.25

OD In.	OD mm	ID In.	ID mm	Cat. No.†	Qty./ Pkg.†
.080	2,03	.031	0,79	BEZD216	80
.100	2,54	.031	0,79	BEZD101	64
.120	3,05	.031	0,79	BEZD239	64
.125	3,18	.031	0,79	BEZD102	128
.150	3,81	.031	0,79	BEZD144	112
.160	4,06	.040	1,02	BEZD247	112
.187	4,75	.031	0,79	BEZD138	120
.200	5,08	.031	0,79	BEZD139	120
.250	6,35	.062	1,57	BEZD109	120
.300	7,62	.062	1,57	BEZD111	120

Combination Pack




PRICE PER PACKAGE . . . $1.95

Line Width (LW) in.	Line Width (LW) mm	Cat. No.†	Qty. Per Pkg. Tees	Elbows	Univ. Corners
.040	1,02	BEZK101	40	42	21
.050	1,27	BEZK102	40	42	20
.062	1,57	BEZK103	40	42	20
.100	2,54	BEZK104	40	40	12
.039	1,0	BEZK105	40	42	21
.079	2,0	BEZK106	40	42	12

ARTWORK TARGETS


30 per package $1.95



Catalog Number BEZ4020

Catalog Number BEZ4038

PRESSURE SENSITIVE DUAL IN-LINE (DIP) PATTERNS




Cut Pad

- Basic large terminal area
- Most commonly used pattern

PRICE PER PACKAGE . . . $1.95

No. of Leads	Qty/ Pkg.†	Scale	Catalog Number
14	32	1X	BEZ6014
	28	2X	BEZ6038
16	32	1X	BEZ6004
	28	2X	BEZ6109
18	30	1X	BEZ6900
	26	2X	BEZ6901
24	12	1X	BEZ6535
	12	2X	BEZ6536
28	12	1X	BEZ6903
	12	2X	BEZ6904
40	8	1X	BEZ6906
	8	2X	BEZ6907




Cut Pad With Conductors

- Use where conductor traces must be routed between pads

PRICE PER PACKAGE . . . $1.95

No. of Leads	Qty/ Pkg.†	Scale	Catalog Number
14	32	1X	BEZ6760
	28	2X	BEZ6761
16	32	1X	BEZ6763
	28	2X	BEZ6764
40	8	1X	BEZ6984
	8	2X	BEZ6985



Narrow Cut Pad

- Use where a longer terminal area is desired. Can be used with conductors between terminals.


PRICE PER PACKAGE . . . $1.95

No. of Leads	Qty/ Pkg.†	Scale	Catalog Number
14	32	1X	BEZ6013
	28	2X	BEZ6071
16	32	1X	BEZ6453
	28	2X	BEZ6244
40	8	1X	BEZ6987
	8	2X	BEZ6988

PRINTED CIRCUIT "TO" STYLE PATTERNS

Price per package . . . $1.95

TO-18 PATTERNS




1X SCALE, **CAT. NO.† BEZ6003,** 36 PER PACK
2X SCALE, **CAT. NO. BEZ6048,** 36 PER PACK

3-LEAD TO-5 PATTERNS




1X SCALE, **CAT. NO.† BEZ6029,** 36 PER PACK

8-LEAD TO-5 PATTERNS




1X SCALE, **CAT. NO.† BEZ6021,** 36 PER PACK
2X SCALE, **CAT. NO. BEZ6197,** 32 PER PACK

10-LEAD TO-5 PATTERNS



1X SCALE, **CAT. NO.† BEZ6022,** 36 PER PACK
2X SCALE, **CAT. NO. BEZ6198,** 32 PER PACK

12-LEAD TO-5 PATTERNS



1X SCALE, **CAT. NO.† BEZ6023,** 36 PER PACK
2X SCALE, **CAT. NO. BEZ6203,** 32 PER PACK

BASIC PRINTED CIRCUIT SEQUENTIAL REFERENCE DESIGNATION KIT

Set Sequence .125" High (3,17 mm)	No. of Sets Per Kit
C1 Thru C20	1
CR1 Thru CR10	1
U1 Thru U20	1
R1 Thru R40	1
Q1 Thru Q20	1
Catalog Number	BEZ80051 $1.95

SEQUENTIAL ALPHABET KIT


Letter Characters .125" High (3,17 mm)	No. of Each Letter Per Set	No. of Sets Per Kit	Cat. No.†
A,E,I,O,R,T	4	2	BEZ80451 $1.95
C,L,N,S,U	3		
D,G,H,M,P,Y	2		
B,F,J,K,Q,V,W,X,Z	1		

SEQUENTIAL NUMBERS KIT

(120 Characters Per Kit)

Set Numbers .125" High (3,17 mm)	No. of Sets Per Kit
01234	12
56789	12
Catalog Number	BEZ80551 $1.95

X-ACTO KNIFE & BLADES



Cat. No. EZ3101 (X-Acto No. 1) $1.50

Cat. No.† BEZ3110 (X-Acto No. 16) 5 blade pack $1.30



Cat. No.† BEZ3108 (X-Acto No. 11) 5 blade pack $1.30



8X MAGNIFIER

- Check PC Artwork & Boards

CAT. NO. BEZ3520 . . . . . **$7.95**

DRAFTING AIDS

POLYESTER ACCUFILM CIF®


(Clear Inking Film) . . . the ideal film for creating precision PC artwork masters

- Excellent surface adhesion
- Dimensional stability
- Protective anti-static coating

QUANTITY: 2 SHEETS PER PACKAGE

Sheet Size	8½ x 11 (21,6 x 27,9 cm)	11 X 17 (27,9 x 43,2 cm)	17 x 22 (43,2 x 55,9 cm)
Catalog No.†	BEZ1101	BEZ1110	BEZ1116
Price	$ .85	$1.20	$1.95

10 x 10 LINES/IN. (.100" — 2,54 mm) HEAVY ACCENT ON 10TH LINE



Polyester VALU-GRIDS

Always use a background grid during printed circuit artwork and layout preparation to insure maximum accuracy on the final circuit board. Using a grid system facilitates the placement of components, terminal areas (donut pads) and conductor traces on the layout. Most multiple lead components, such as dual in-line packages (DIPS) conform to standard grid increments.

Sheet Size	Catalog Number	Price Per Sheet
8½" x 11" (21,6 x 27,9 cm)	BEZ10223	$ .95
11" x 17" (27,9 x 43,2 cm)	BEZ10224	1.55
17" x 22" (43,2 x 55,9 cm)	BEZ10225	2.25

ACCUPRINT DRAFTING and TRACING VELLUM PADS


Use these handy sheets of Bishop's ACCUPRINT drafting vellum for preliminary printed circuit artwork sketches and layouts. **50-Sheet Pad**

SAME GRID PATTERN AS ABOVE

Sheet Size	Plain (Ungridded) 16# .0027" Thick (0,07 mm)	10 x 10 GRID Dropout Blue 16# .0027" Thick (0,07 mm)
8½" x 11" (21,6 x 27,9 cm)	-------	BEZ20207 $ 6.45
11" x 17" (27,9 x 43,2 cm)	BEZ20211 $ 9.95	BEZ20208 $11.40

INSERTION-TYPE CONNECTOR PATTERNS

All strips 4" in length




Center to Center Spacing	Scale	Contacts/ Strip	Strips per Pack/ Catalog Number	Strips/ Pack
.100" (2.54 mm)	1X	44	2 BEZ6805 $1.95	2
	2X	22	5 BEZ6809 $1.95	5
.125" (3.175 mm)	1X	35	2 BEZ6704 $1.95	2
	2X	17	4 BEZ6716 $1.95	4
.156" (3.962 mm)	1X	28	3 BEZ6708 $1.95	3
	2X	14	5 BEZ6720 $1.95	5

MULTI-PURPOSE PRESPACED PADS

Use to speed tape-up for rows of axial lead component pads or add DIP sizes

Pad Type



Center to Center Spacing	Scale	Pads Per Strip	Strips Per Pack	Catalog Number
.100" (2.54 mm)	1X	40	6	BEZ5000 $1.95
	2X	20	7	BEZ5001 $1.95
	1X	1X 40	6	BEZ5003 $1.95
	2X	2X 20	7	BEZ5004 $1.95
.125" (3.175 mm)	1X	1X 40	6	BEZ5017 $1.95
	2X	2X 20	7	BEZ5018 $1.95
	1X	1X 40	6	BEZ5020 $1.95
	2X	2X 20	7	BEZ5021 $1.95
.156" (3.962 mm)	2X	2X 13	7	BEZ5015 $1.95
	1X	1X 25	6	BEZ5014 $1.95


PLEASE BE SURE TO ORDER BY PART NUMBER ONLY!


NEW! E-Z BUS™ MICROPROCESSOR


Your Direct Route To Efficient, Creative and

Cut The High Cost Of Creativity! Combine E-Z CIRCUIT's COPPER ELECTRONIC PACKAGING & PROTOTYPING SYSTEM With E-Z CIRCUIT's New E-Z BUS™ CARDS And Plug Unlimited Flexibility Into Your Microprocessor System — At A Remarkably LOW COST!

It's As E-Z As...

1. 

2. 

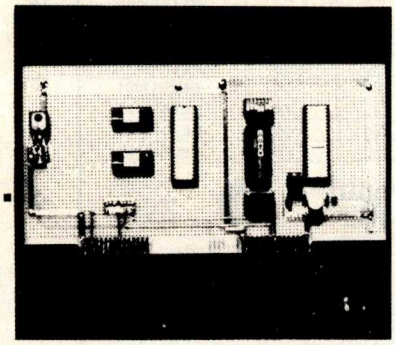3. 

E-Z CIRCUIT's Unique New Pressure-Sensitive COPPER Printed Circuit Design System Lets You Create Your Own Printed Circuit Boards Quickly, Easily and Professionally . . . Without Artwork, Photography, Or Etching!

E-Z CIRCUIT's Unique Copper PC Design System is an aerospace-proven concept in circuit packaging that lets you construct prototypes and limited quantity production printed circuit boards directly from engineering sketches and logic flow diagrams. Using this system, you can make production quality PC boards without artwork, photography, screening, etching, plating or any other production problems and time delays.

The flexibility and simplicity of E-Z CIRCUIT's Copper Printed Circuit Design System reduces construction time, facilitates problem solving, speeds design changes and insures a highly reliable, technically precise PC board prototype or microprocessor interface.


NEW! E-Z BUS™ CARDS

Plain Microprocessor Plugboards Designed To Permit Maximum Creativity In Program Experimentation, Interface Design, And Memory Expansion

Want to build your own microprocessor interface without the hassle of modifying standard hardware? E-Z CIRCUIT's plain, pre-shaped, pre-drilled microprocessor plugboards free your design of unnecessary contacts, etching, and other extras that cost you money, yet serve no purpose in your design! Using E-Z CIRCUIT's new Bus Cards as a base, you build the precise microprocessor design, modem control, motor control or memory expansion you require, with cost, composition, quality and reliability completely under your control.

We have an E-Z BUS™ Card specially designed to plug into your state-of-the-art microprocessor system.

- **Mount any combination of E-Z CIRCUIT™ pressure-sensitive copper dual-in-lines (DIPS), and E-Z CIRCUIT wrap post sockets plus transistors, resistors, capacitors, E/M or SS relays, terminals and switches.**
- **Plain, non-etched surface allows unrestricted component placement and maximum flexibility for the implementation of your individual design**

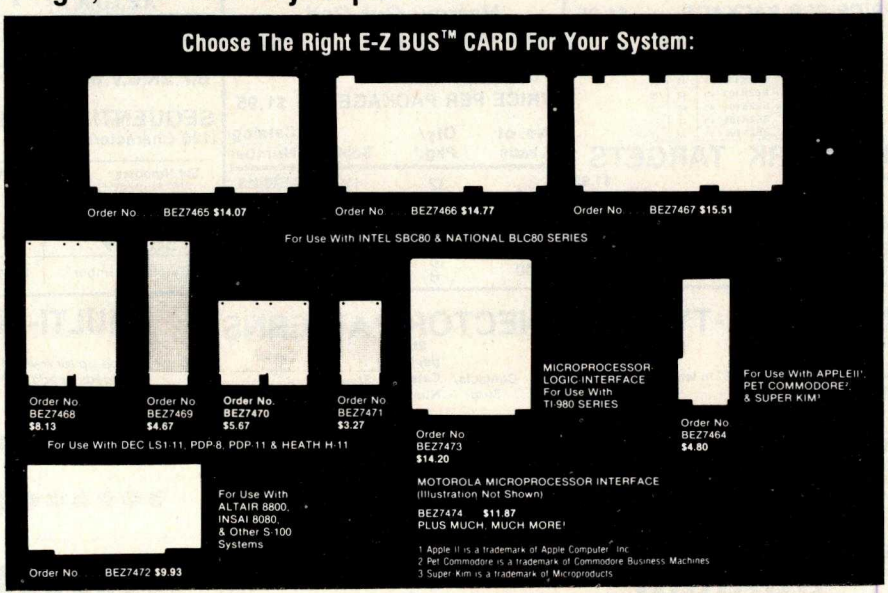

- **.042" diameter holes on 0.1" grid centers**
- **Precision pre-shaped for total compatability with microprocessor units specified**
- **Ideal for use with E-Z CIRCUIT's pressure-sensitive Copper PC Design System or for soldering and wire wrapping applications using E-Z CIRCUIT's standard hardware and accessories**


PLEASE ORDER BY PART NUMBER

DESIGN SYSTEM

Successful Interface Design


E-Z CIRCUIT's Comprehensive COPPER ELECTRONIC PACKAGING & PROTOTYPING SYSTEM Contains Everything You Need . . .

(Exploded view of E-Z BUS SYSTEM)

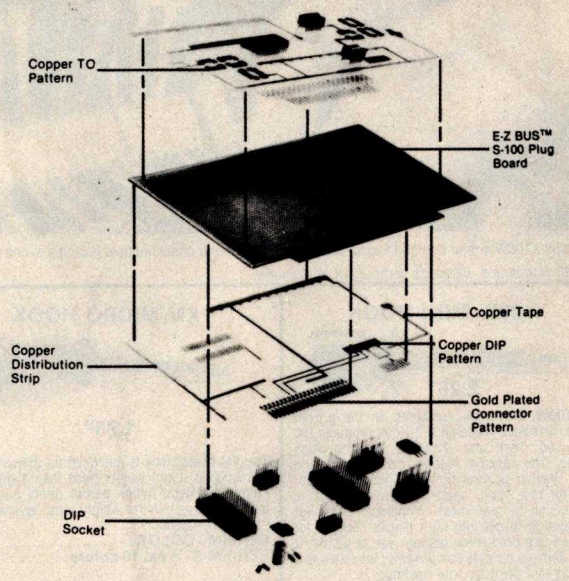


COPPER POWER & GROUND DISTRIBUTION STRIPS

SINGLE PAD DISTRIBUTION STRIP



Order No. BEZ1321 Pkg. of 3 Strips $1.95

SINGLE PAD DISTRIBUTION STRIP



Order No. BEZ1323 Pkg. of 3 Strips $1.95

SINGLE ROW DISTRIBUTION STRIP

Order No. BEZ1325 Pkg. of 6 Strips $1.95


DOUBLE ROW DISTRIBUTION STRIP



Order No. BEZ1326 Pkg. of 3 Strips $1.95


DUAL IN-LINE PACKAGE (DIP) PATTERNS

FOUR PAD (DIP) PATTERN




Accommodates 8, 10, 14, 16, 18, or 20-lead Dual In-Line Devices.
Description: 56 dual rows of four pads each on .100" (2,54 mm) centers. Extra terminal areas accommodate 3 additional terminations for each DIP lead.
Catalog Number BEZ1205
Pkg. of 1 Pattern . . . **$1.95**

TRIPLE PAD (DIP) PATTERN




Accommodates 8, 10, 14, 16, 18, or 20-lead Dual In-Line Devices.
Description: 56 dual rows of three pads each on .100" (2,54 mm) centers. Extra terminal areas accommodate 2 additional terminations for each DIP lead.
Catalog Number BEZ1206
Pkg. of 1 Pattern . . . **$1.95**

DOUBLE PAD (DIP) PATTERN



Accommodates 8, 10, 14, 16, 18, or 20-lead Dual In-Line Devices.
Description: 56 dual rows of two pads each on .100" (2,54 mm) centers. Extra terminal areas accommodate 1 additional termination for each DIP lead.
Catalog Number BEZ1223
Pkg. of 2 Patterns . . . **$1.95**


COPPER CONNECTOR PATTERNS




The combination of a component side pattern and a matching circuit side pattern allows 44 separate connections.

Includes One Connector Pattern Each For Circuit & Component Sides: 22 positions, @ .156" (3,96 mm) Centers
Order No. BEZ1365
1 Set Per Pack . . . **$2.90**

CONNECTOR CONFIGURATION
The combination of a component side pattern and a matching circuit side pattern allows 44 separate connections.



Includes one connector pattern each for Circuit & Component Sides: 22 positions, @ .156" (3,96 mm) Centers
Order No. BEZ2369
1 Set Per Pack . . . **$3.80**




PLUG-IN CONNECTOR CONFIGURATIONS
Connector strips are nickel and gold plated over copper

UN-DRILLED Off-Grid Etched Holes
COMPACT CONNECTOR CONFIGURATION

ORDER NO.	PIN CTRS "A"	NO. PINS	STRIPS PER PKG.	PRICE PER PKG.
BEZ2371	.125"	15	2	$2.40



COPPER PRESPACED DONUT PADS
31 Prespaced Donut Pads/Strip
Order No. BEZ1340
Pkg. of 6 Strips . . . **$1.95**



COPPER DISCRETE COMPONENT STRIP
Allows mounting of 16 components
.500" Row Center Spacing
.200" Component Spacing
Order No. BEZ1301
1 Strip Per Pack . . . **$1.95**



COPPER PRESPACED CONDUCTOR STRIP
Order No. BEZ1332
Package of 10 Conductors (1 strip) . . . **$1.95**



COPPER TEST POINT STRIP
Cut for number of test points required.
Order No. BEZ1381
2 Strips Per Pack . . . **$1.95**


COPPER TO-5 Style Case PATTERNS



TO-5, 4 Lead .200" Lead Dia. Spacing
Order No. BEZ1022
8/pkg. **$1.95**



TO-5, 3-Lead, .200" Lead Dia. Spacing
Order No. BEZ1021
8/pkg. . . . $1.95



TO-5, 12-Lead, Spread Dimensions
Order No. BEZ1026
6/pkg. . . . $1.95



TO-5, 10-Lead, Spread Dimensions
Order No. BEZ1025
6/pkg. . . . $1.95



TO-5, 8-Lead, Spread Dimensions
Order No. BEZ1024
6/pkg. . . . $1.95



TO-5, 6-Lead, Dual Transistor Spread Dimensions
Order No. BEZ1023
6/pkg. . . . $1.95

COPPER POWER TRANSISTOR PATTERNS



TO-3 PACKAGE FLANGE MOUNTING
Order No. BEZ11404
5 Patterns/pkg. . . . $1.95



RECTIFIER, SCR TRIAC (Stud Mounting Packages)
Order No. BEZ1405
6 Patterns/pkg. . . . $1.95



SCR & TRANSISTOR FLAT PLASTIC PACKAGE (Thru Hole Mtg.)
Order No. BEZ1406
8 Patterns/pkg. . . . $1.95

COPPER 90° ELBOW

LINE WIDTH	ORDER NO.	QTY.	PRICE
.050" (1,27 mm)	BEZ121	36	$1.95
.100" (2,54 mm)	BEZ124	26	1.95

COPPER DONUT PADS
(Round Terminal Areas)
$1.50 Per Package

(O.D.) Outside Diameter		(I.D.) Inside Diameter		Order No.
Decimal	Metric	Decimal	Metric	
.250"	6,35 mm	.040"	1,02 mm	BEZ7204
.125"	3,18 mm	.040"	1,02 mm	BEZ7202
.100"	2,54 mm	.040"	1,02 mm	BEZ7201

COPPER TAPES


DECIMAL SIZE	METRIC SIZE	ORDER NO.	PRICE PER PKG.
.015	0,38 mm	BEZ300151	$1.00
.031	0,79 mm	BEZ300311	1.00
.050	1,27 mm	BEZ300501	1.00
.100	2,54 mm	BEZ301001	1.00

INSULATIVE TAPE



.100" (2,54 mm) Width . . .
Order No. BEZ311001
.200" (5,08 mm) Width . . .
Order No. BEZ312001
QUANTITY: One 10 Foot Roll Per Package
PRICE: $1.00 Per Package

CUT 'n' PEEL COPPER SHEETS



Ideal for use as power and ground planes.
Order No. BEZ7251, 5" x 6", 3 Sheets Per Pack . . . $1.95

PRIORITY ONE ELECTRONICS

E-Z-HOOK



Model X100W's mini size and Finger-eze Hypo-Action permit direct multiple hookups to one pin, even with wire wraps. Connects vertically or horizontally.


IMPORTANT ORDERING INFORMATION

Most Items Available in 10 Retma Colors:

BK - BLACK **BR** - BROWN **RD** - RED
OR - ORANGE **YE** - YELLOW **GN** - GREEN
BU - BLUE **VT** - VIOLET **GY** - GREY
WH - WHITE **S** - ONE EACH OF ALL 10 COLORS

COLOR: Must be replaced with one of the above **ABBREVIATIONS.**


X100W MINI HOOK




The X100W Mini-Hook combines all the proven features that have made all E-Z-Hook products the most used Test and Trouble Shooting Aids available. The concave Plunger configuration and built-in Washer provide tireless Finger-eze Hypo-Action for fast, safe, short-free testing. Hook is large enough to span most component leads, yet small enough to get into tight places. Tough, for continued use production testing, yet so gentle, it will not damage delicate components. Insulated to a single contact point for true readings.

EZH-X100W - COLOR ..... **$.98**
EZH-X100W-S - 1 ea. 10 colors **$9.50**

JUMPER—MINI-HOOK TO MINI-HOOK




Part Number	Wire Lgth. Inches	PRICE
EZH204-12-COLOR	12	$ 2.00
EZH204-12-S 1 ea. 10 colors	12	$19.50
EZH204-24-COLOR	24	$ 2.00
EZH204-24-S 1 ea. 10 colors	24	$19.50
EZH204-36-COLOR	36	$ 2.00
EZH204-36-S 1 ea. 10 colors	36	$19.50



MINI-HOOK TO STACKING BANANA PLUG
32"/80cm

EZH-201W-RD or BK **$1.95**


MINI-HOOK TO MINIATURE BANANA PLUG
EZH-CZIW-RD or BK **$2.25**



MINI-HOOK to .025" (.635 mm) SQUARE SOCKET WITH HEAT SHRINK INSULATOR

24"

EZH-203-24-RD or BK **$1.95**




E—Z—LINK

0.25" SQUARE SOCKET CONTINUOUS JUMPERS

E-Z-Link Continuous Jumpers were designed to facilitate pre-testing back-panel layouts before final wire wrapping. Consisting of insulated .025" (.635mm) Square Socket Connectors evenly spaced on 3" centers, E-Z-Links individually snap over standard wire wrapping pins to form any desired network. Eliminate costly in-plant measuring, stripping and crimping.

EZH-L3025-BL or RD-pkg. of 25 ..... **$19.95**


XM MICRO HOOK




The XM Micro Hook is designed for difficult IC test connections. Light weight (less than 1 gram) and Finger-eze Hypo Action permit direct hook up to delicate wires where weight and leverage may damage component.

EZH-XM - COLOR ..... **$.99**
EZH-XM-S - 1 ea. 10 colors **$9.60**

JUMPER—MICRO-HOOK TO MICRO-HOOK



Part Number	Wire Lgth. Inches	PRICE
EZH-XM-12-COLOR	12	$ 2.25
EZH-XM-12-S 1 ea. 10 colors	12	$21.50
EZH-XM-24-COLOR	24	$ 2.25
EZH-XM-24-S 1 ea. 10 colors	24	$21.50
EZH-XM-36-COLOR	36	$ 2.25
EZH-XM-36-S 1 ea. 10 colors	36	$21.50



MICRO-HOOK TO STANDARD BANANA PLUG
32"/80cm


EZH-BXM-RD or BK **$1.95**

TEST CABLE WALL BRACKET

Deep Slots hold Test Cables for Easy Selection. Half slot on each end end permits-mounting of two or more units side by side with no loss of space between racks.




EZH-WB6 - $3.00



PART SUBSTITUTION CLIP

EZH-71-1-BK pkg. 2 ..... **$2.10**




SLIM-LINE TEST CONNECTOR


Slim Line Probe with lightweight construction. Screw on cover for ready access to repair or replace internal circuitry or connections.

EZH-54-1-RD or BK **$1.95**

XPL PROBE CABLES

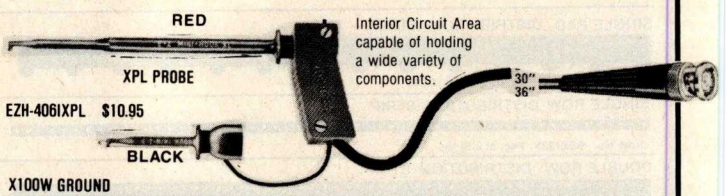

EZH-406IXPL $10.95



BNC MALE TO BNC MALE, WEATHERPROOF, WITH STRAIN RELIEF BOOTS

SPECIFY LENGTH


Cable:RG58C/U

Part Number	Wire Length Inches	PRICE
EZH-1026-24	24	$6.50
EZH-1026-36	36	$6.50
EZH-1026-48	48	$6.50




BNC FEMALE TO BNC

EZH-9220 ..... **$2.00**



BNC FEMALE TO UHF MALE ADAPTER

EZH-9001 ..... **$3.60**



STANDARD BANANA PLUG

EZH-9202-COLOR pkg. 2 ..... **$1.20**




PANEL MOUNT STANDARD BANANA JACK

EZH-9217-COLOR pkg. 4 ..... **$2.00**



BNC FEMALE TO STANDARD DOUBLE BANANA PLUG ADAPTOR

EZH-9225 ..... **$3.75**



BNC FEMALE PANEL RECEPTACLE

EZH-9230 ..... **$1.20**




BNC MALE CONNECTOR FOR RG58C/U CABLE

EZH-8901 ..... **$1.75**




BNC T ADAPTOR - 2 FEMALE AND 1 MALE CONNECTORS

EZH-9238 ..... **$4.95**



UHF MALE CONNECTOR FOR RG58C/U CABLE

EZH-8911 ..... **$1.50**




STACKING BANANA PLUG

EZH-9203 RD or BK pkg. 2 ..... **$1.50**




STANDARD BANANA JACK

EZH-9210 RD or BK pkg. 2 ..... **$1.50**



STACKING DOUBLE BANANA PLUG

EZH-DB750 ..... **$2.10**



ALLIGATOR CLIP LEAD SETS

10 color coded mini clip leads 15 inches long. 2 each red, green, yellow, black, and white.
CAL-ACL-1015 $2.19

10 color coded standard clip leads 15 inches long. 2 each red, green, yellow, black, and white.
CAL-ACL-1015H $2.69

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS

NEW

introducing the great *new* "Super-Grip II"

test clip from A P Products

22 new models for troubleshooting DIP's safely and quickly


When we invented the original A P Super-Grip test clip in 1967, we thought it was perfect. . . *but look at the improvements we've made!*

In the process, we've retained every invaluable design feature that assures ultra-reliable, non-shorting electrical connections with positive clamping action.

And here are *more* bonus features:

- **Proven Alloy 770 contacts for optimum wiping action.**
- **New one-piece body for each DIP size. TC-14 fits 14-pin DIP, etc.**
- **Simplifies prototype and production testing, field service work, and Quality Control inspection.**

CHECK THESE UNIQUE FEATURES:

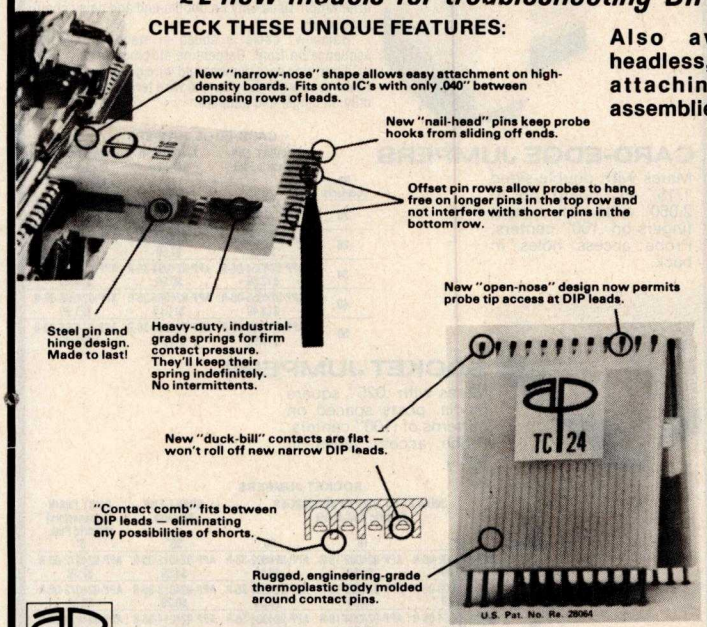

Also available with long, headless, test lead pins for-attaching AP jumper cable assemblies...

Both rows of contacts are the same length (not offset) and do not have "nail-heads".

STANDARD TEST CLIP


PART NUMBER	MODEL NUMBER	ROW TO ROW SPACING	PRICING SCHEDULE 1-49	50-99	100-249	250-499
APP-923695	TC-8	.3 IN.	$ 7.35	$ 6.90	$ 6.60	$ 6.30
APP-923698	TC-14	.3 IN.	$ 4.50	$ 4.07	$ 3.82	$ 3.69
APP-923700	TC-16	.3 IN.	$ 4.75	$ 4.28	$ 4.04	$ 3.90
APP-923702	TC-16LSI	.5/.6 IN.	$ 8.95	$ 8.40	$ 8.05	$ 7.70
APP-923703	TC-18	.3 IN.	$10.00	$ 9.40	$ 9.00	$ 8.60
APP-923704	TC-20	.3 IN.	$11.55	$10.85	$10.40	$ 9.95
APP-923705	TC-22	.4 IN.	$12.95	$12.17	$11.67	$11.17
APP-923714	TC-24	.5/.6 IN.	$13.85	$12.47	$11.77	$11.36
APP-923718	TC-28	.5/.6 IN.	$15.25	$14.35	$13.75	$13.10
APP-923720	TC-36	.5/.6 IN.	$19.95	$18.75	$17.95	$17.15
APP-923722	TC-40	.5/.6 IN.	$21.00	$19.75	$18.90	$18.05

HEADLESS TEST CLIP

PART NUMBER	MODEL NUMBER	ROW TO ROW SPACING	PRICING SCHEDULE 1-49	50-99	100-249	250-499
APP-923690-8	LTC-8	.3 IN.	$ 7.35	$ 6.90	$ 6.60	$ 6.30
APP-923690-14	LTC-14	.3 IN.	$ 4.50	$ 4.07	$ 3.82	$ 3.69
APP-923690-16	LTC-16	.3 IN.	$ 4.75	$ 4.28	$ 4.04	$ 3.90
APP-923690-16L	LTC-16LSI	.5/.6 IN.	$ 8.95	$ 8.40	$ 8.05	$ 7.70
APP-923690-18	LTC-18	.3 IN.	$10.00	$ 9.40	$ 9.00	$ 8.60
APP-923690-20	LTC-20	.3 IN.	$11.55	$10.85	$10.40	$ 9.95
APP-923690-22	LTC-22	.4 IN.	$12.95	$12.17	$11.67	$11.17
APP-923690-24	LTC-24	.5/.6 IN.	$13.95	$12.47	$11.77	$11.36
APP-923690-28	LTC-28	.5/.6 IN.	$15.25	$14.35	$13.75	$13.10
APP-923690-36	LTC-36	.5/.6 IN.	$19.95	$18.75	$17.95	$17.15
APP-923690-40	LTC-40	.5/.6 IN.	$21.00	$19.75	$18.90	$18.05

another "Faster & Easier" innovation from A P PRODUCTS INCORPORATED

INTRA-CONNECTOR

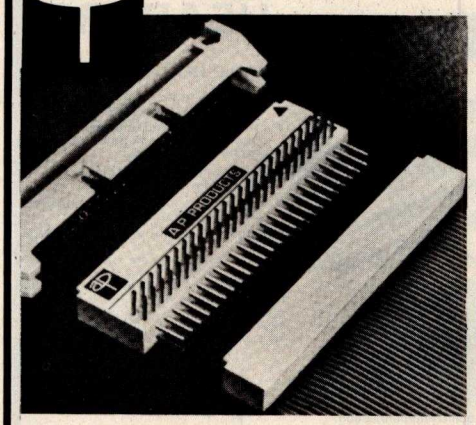


PROVIDES FULL ACCESS TO LINES . . . SAVES VALUABLE TIME TESTING FLAT RIBBON CABLE SYSTEMS

- **Permits quick testing of previously unprobeable circuits.**
- **Provides both straight-in and right-angle functions.**
- **Mates with standard .10"x.10" dual-row connectors.**

Patent Pending

No. of Contacts	Dim. "A"	Part Number	Model No.	Price Each
20	1.160	APP-922576-20	IC-20	$6.00
26	1.460	APP-922576-26	IC-26	6.90
34	1.860	APP-922576-3	IC-34	8.10
40	2.160	APP-922576-4(	IC-40	9.00
50	2.660	APP-922576-50	IC-50	10.50

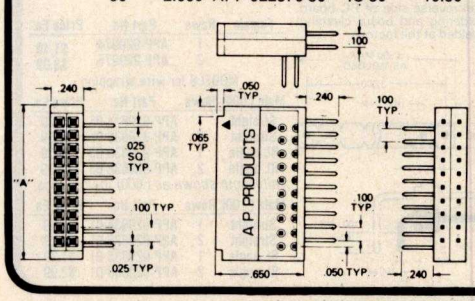


The A P Intra-Connector allows immediate access to previously inaccessible lines. In use, the connector is interjected between mating system connectors to provide external pin contacts that can be probed individually or connected to another cable assembly; pins also can be used to facilitate daisy chaining from a single connector cable end.

Two Intra-Connectors used in conjunction with the A P Intra-Switch form a complete test assembly for probing signals under no load and full load conditions.

Contacts are non-corrosive alloy 770. Body is glass-filled polyester.

INTRA-SWITCH

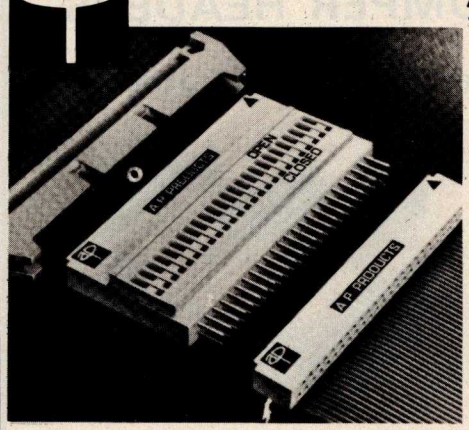


ALLOWS ANY LINE TO BE OPENED OR CLOSED . . . ANOTHER TIME SAVER IN TESTING FLAT RIBBON CABLE SYSTEMS

- **Permits instant line-by-line switching for diagnostic or QA testing.**
- **Switches actuated with pencil or probe tip.**
- **Mates with standard .10"x.10" dual-row connectors.**

Patent Pending

No. of Contacts	Dim. "A"	Part Number	Model No.	Price Each
20	1.160	APP-922578-2(	IS-20	$12.00
26	1.460	APP-922578-2(	IS-26	13.80
34	1.860	APP-922578-34	IS-34	16.20
40	2.160	APP-922578-40	IS-40	18.00
50	2.660	APP-922578-50	IS-50	21.00

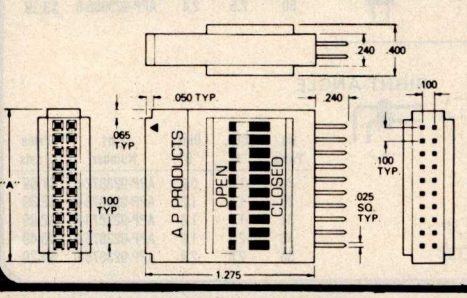

The A P Intra-Switch allows opening and closing any number of lines, individually, at system interconnection points. Applications include switching command signals to control boards as well as switching I/O signals to or from test equipment and for programming optional preset logic functions.

Design features include: low profile for use in confined areas, switch buttons recessed in face of covers to eliminate accidental switching, and position "1" identification.

Wiping action and spherical detents maximize contact integrity.

An Intra-switch used in conjunction with two A P Intra-Connectors form a complete test assembly for probing signals under no load and full load conditions.


Contacts are non-corrosive alloy 770. Body is glass-filled polyester.

PLEASE ORDER BY PART NUMBER

DIP JUMPERS

FLAT RIBBON CABLE ASSEMBLIES WITH DIP CONNECTORS

- **Available with 14, 16, 24 and 40 contacts.**
- **Mate with standard IC sockets.**
- **Fully assembled and tested.**
- **Integral molded-on strain relief.**
- **Discrete test points for line-by-line probeability.**

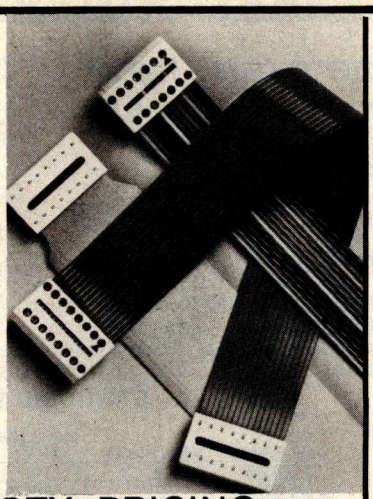

CALL FOR QTY. PRICING


A P DIP Jumpers are the low-cost, high-quality solution for jumpering within a PC board; interconnecting between PC boards, backplanes and motherboards; interfacing Input/ Output signals; and more.

All assemblies use rainbow cable. Standard lengths are 6, 12, 18, 24 and 36 inches.

SINGLE-ENDED DIP JUMPERS

No. Contacts	Length 36"
14	APP-924102-36 $3.49
16	APP-924112-36 $3.69
24	APP-924122-36 $5.89
40	APP-924132-36 $10.09


DOUBLE-ENDED DIP JUMPERS



No. Contacts	Length 6"	Length 12"	Length 18"	Length 24"	Length 36"
14	APP-924106-6 $3.59	APP-924106-12 $3.89	APP-924106-18 $4.19	APP-924106-24 $4.49	APP-924106-36 $5.09
16	APP-924116-6 $3.99	APP-924116-12 $4.29	APP-924116-18 $4.59	APP-924116-24 $4.89	APP-924116-36 $5.49
24	APP-924126-6 $6.19	APP-924126-12 $6.69	APP-924126-18 $7.19	APP-924126-24 $7.69	APP-924126-36 $8.69
40	APP-924136-6 $10.29	APP-924136-12 $11.19	APP-924136-18 $12.09	APP-924136-24 $12.99	APP-924136-36 $14.79

A P PRODUCTS INCORPORATED FLAT RIBBON CABLE ASSEMBLIES

- Choice of 3 types of end connectors molded on and factory tested.
- Daisy chain and single-end also available.
- 5 popular sizes to choose from: 20, 26, 34, 40 and 50 contacts, each with line-by-line probe access holes.
- Choice of 2 cable types and 5 lengths.



FLAT RIBBON CABLE


Stranded, 28 AWG with laminated PVC insulation.

"Electric Pink" cable has red stripe on one edge for orientation. Used only on double-end and daisy chain assemblies.

"Rainbow" cable is coded in standard 10-color sequence on front. Serpentine striping on back aids in identifying wire number and wire group during tear down separation for discrete wire terminations. Used only on single-end jumpers.

CARD-EDGE JUMPERS

Mates with double-sided 1/16" PC board up to 2.050" wide with contact fingers on .100" centers. Probe access holes in back.



CARD-EDGE JUMPERS

No. Contacts	DOUBLE END Electric Pink 6"	SINGLE END Rainbow 36"	DAISY CHAIN (3 connectors) Electric Pink 6"
20	APP-924052-06-R $8.89	APP-924062-36-R $6.49	APP-924092-06-R $13.29
26	APP-924053-06-R $9.99	APP-924063-36-R $7.59	APP-924093-06-R $14.89
34	APP-924054-06-R $12.39	APP-924064-36-R $9.59	APP-924094-06-R $18.49
40	APP-924055-06-R $14.49	APP-924065-36-R $11.19	APP-924095-06-R $21.69
50	APP-924056-06-R $15.69	APP-924066-36-R $12.79	APP-924096-06-R $23.49

SOCKET JUMPERS

Mates with .025" square or dia. posts spaced on patterns of .100" centers. Probe access holes in back.


SOCKET JUMPERS

No. Contacts	DOUBLE END JUMPER ASSEMBLIES Electric Pink Cable 6"	18"	36"	SINGLE END Rainbow 36"	DAISY CHAIN (3 connectors) Electric Pink 6"
20	APP-924002-06-R $4.99	APP-924002-18-R $5.69	APP-924002-36-R $6.59	APP-924012-36-R $4.89	APP-924072-06-R $7.39
26	APP-924003-06-R $6.49	APP-924003-18-R $7.29	APP-924003-36-R $8.59	APP-924013-36-R $6.29	APP-924073-06-R $9.69
34	APP-924004-06-R $8.49	APP-924004-18-R $9.59	APP-924004-36-R $11.19	APP-924014-36-R $8.29	APP-924074-06-R $12.69
40	APP-924005-06-R $9.99	APP-924005-18-R $11.59	APP-924005-36-R $12.99	APP-924015-36-R $9.69	APP-924075-06-R $14.89
50	APP-924006-06-R $12.39	APP-924006-18-R $13.99	APP-924006-36-R $16.29	APP-924016-36-R $11.99	APP-924076-06-R $18.49


double-row JUMPER HEADERS

Ideal mates for "GREAT JUMPERS"

- Solder to PC boards for instant plug-in access via socket-connector jumpers
- .025" square posts are molded into plastic header strip on a .10" x .10" matrix
- Choice of straight or right angle configurations

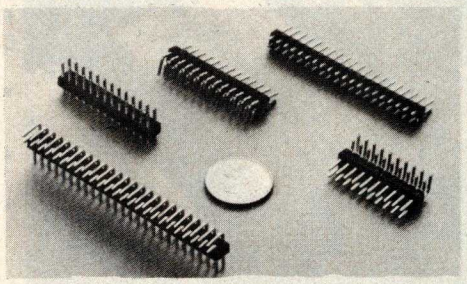


MATERIALS: Dielectric is thermoplastic polyester, unaffected by wave soldering or board cleaning solvents. Posts are fabricated from copper alloy



STRAIGHT


No. Posts	Dim. "A"	Dim. "B"	Part Number	Price 2 sets
20	1.0	0.9	APP-923862-R	$1.59
26	1.3	1.2	APP-923863-R	$1.89
34	1.7	1.6	APP-923864-R	$2.39
40	2.0	1.9	APP-923865-R	$2.79
50	2.5	2.4	APP-923866-R	$3.39



RIGHT-ANGLE

No. Posts	Dim. "A"	Dim. "B"	Part Number	Price 2 sets
20	1.0	0.9	APP-923872-R	$1.89
26	1.3	1.2	APP-923873-R	$2.39
34	1.7	1.6	APP-923874-R	$2.99
40	2.0	1.9	APP-923875-R	$3.49
50	2.5	2.4	APP-923876-R	$4.29

MALE and FEMALE HEADERS

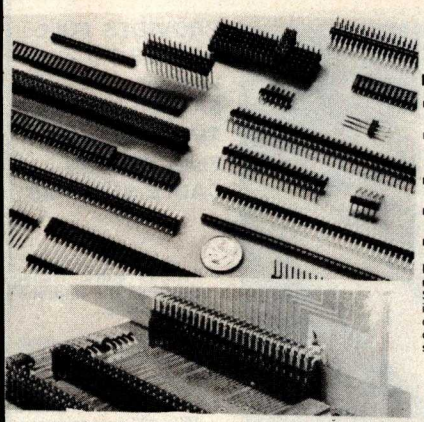


Typical application: board-to-board interconnection.

FEMALE HEADERS

- **Mate with matrices of .025" square or round posts on .100" centers**
- **Ideal as single and dual-row cable connectors for back panels and patchboard matrices**
- **36 "tuning fork" contacts per row in rugged nylon header strip**
- **May be "cut-to-length" for shorter rows of contacts**
- **Single and dual-row strips available**

Female A P Headers are stackable — to maintain .100-inch row-to-row spacing. Solder tails are sized for PC board mounting or cable attachment. Built-in stand-offs facilitate wave soldering and board cleaning. Dual-row headers are ultrasonically welded at the factory.



Female	Rows	Part No.	Price Ea.
	1	APP-929974	$1.49
	2	APP-929975	$3.09

MODELS for wire wrapping

Male (.600)	Rows	Part No.	Price Ea.
Straight	1	APP-929834-05	$2.29
Straight	2	APP-929836-05	$4.59
Rt. angle	1	APP-929835-03	$2.09
Rt. angle	2	APP-929838-03	$4.59

Tail length shown as (.600) in drawings.

Male (.100)	Rows	Part No.	Price Ea.
Straight	1	APP-929834-01	$1.09
Straight	2	APP-929836-01	$2.29
Rt. angle	1	APP-929835-01	$1.29
Rt. angle	2	APP-929838-01	$2.99


MALE HEADERS—STRAIGHT & RIGHT ANGLE

- **For economical attachment of complete matrices of .025" square posts to PC boards to serve as male contacts for interconnection systems**
- **Ideal for mating with single and dual-row female connectors; also use as patch-board for discrete, single-position connections**
- **36 posts per row — molded into nylon header strip**
- **"Break-to-length" feature allows making short rows**

Male A P Headers are stackable to maintain .100-inch row-to-row spacing. All may be wire-wrapped on reverse side of PC board. Built-in stand-offs facilitate wave soldering and board cleaning. Dual-row headers are ultrasonically welded at the factory.

MATERIALS

DIELECTRIC: Thermoplastic polyester.
POSTS: Full-hard copper alloy 770.



CALL FOR QUANTITY PRICING

PRIORITY ONE ELECTRONICS

Introducing POWERACE

Use a POWERACE for faster and easier prototyping of all types of electronic circuits

- 1680 solderless, plug-in tie points...will hold up to 18 14-pin DIP's.
- Breadboard elements accept all DIP sizes...including RTL, DTL, TTL and CMOS devices, TO-5's and discretes with leads up to .032" dia.
- All connections to/from switches, indicators, power supplies and meters are made via solderless, plug-in, tie-point blocks on control panels.
- Interconnect with any solid 20 to 30 AWG wire.
- Breadboard elements are mounted on ground planes...ideal for high-frequency and high-speed/low-noise circuits.
- Short-circuit-proof fused power supplies.
- Operate on 110 to 130 VAC at 60 Hz.
- Space-age compact styling and high-grade components permit convenient, organized and quick prototyping.

SHIPPING WEIGHT - 4 LBS.



POWERACE 103	POWERACE 101	POWERACE 102
APP-923103	APP-923101	APP-923102
$124.95	**$79.95**	**$124.95**
Triple-output power supply for prototyping both linear and digital circuits.	*The general purpose model for prototyping all types of circuits.*	*The complete digital prototyping lab with FREE logic probe built in!*

All three of these brand new POWERACE models offer a new dimension in convenience for fast, solderless, circuit building and testing.

In addition to built in power supplies, each model incorporates two of the famous AP Products Super Strip universal plug-in breadboards. (See Super Strip page for complete details.) Combined, they provide 16 distribution buses of 25 tie points per bus. These may be jumpered in groups as desired and used for voltage and ground distribution, reset lines, clock lines, shift command, etc. The remaining 1280 tie points are for plugging in circuit components and jumper wires.

As a bonus, a free logic probe is incorporated into model 102.

POWERACE 101

POWER SUPPLY is required and adjustable from +5 to +15 VDC at 600 mA. Ripple/noise is ⩽10 mV at full load. Line and load regulation is ⩽3%.

METER is built in 0-15 VDC. Inputs are accessible at tie-point blocks on control panel which allows monitoring of power supply or circuits. Meter accuracy is 5% of full scale.

POWERACE 103

TRIPLE-OUTPUT POWER SUPPLY has outputs of +5 VDC at 750 mA; +15 VDC at 250 mA; and -15 VDC at 250 mA. Ripple/noise is ⩽10 mV at full load for all outputs. Line and load regulation is ⩽1% for all outputs. ±15-volt outputs track.

METER is built in 15-0-15 VDC. Input is accessible at tie-point blocks on control panel which allows monitoring of power supply or circuits. Meter accuracy is 5% of full scale.

TWO LOGIC INDICATORS (LED's) have buffered inputs that require 1 microamp max.

TWO LOGIC SWITCHES, momentary, with debounce circuitry. Both Q and Q̄ outputs can sink 15 mA, and source 5 mA.

TWO DATA SWITCHES with logic 1 and logic 0 outputs have unlimited sinking capabilities and can source 10 mA.

POWERACE 102

POWER SUPPLY is regulated +5 VDC at 1 amp. Ripple/noise is ⩽10 mV at full load. Line and load regulation is ⩽1%.

PULSE DETECTION WITH MEMORY is built-in. Will detect positive or negative going pulses as short as 10 nanoseconds. Memory is reset by momentary switch on control panel.

THREE LOGIC INDICATORS (LED's) have buffered inputs that require 1 microamp max.

FREE LOGIC PROBE: the above pulse detection with memory plus logic indicator features constitute a free, built-in logic probe!

TWO LOGIC SWITCHES, momentary, with debounce circuitry. Both Q and Q̄ outputs can sink 15 mA, and source 5 mA.


FOUR DATA SWITCHES with logic 1 or logic 0 outputs have unlimited sinking capabilities and can source 10 mA.

CLOCK GENERATOR has the following frequencies available: 1 Hz, 10 Hz, 100 Hz, 1 KHz, 10 KHz and 100 KHz with a 50% duty cycle. C̄ output will sink 15 mA and source 5 mA. C output will sink or source 50 mA.

ONE-SHOT PULSE GENERATOR has output of 7 ms pulse, positive or negative going. Both Q and Q̄ outputs can sink 15 mA and source 400 microamps.

SUPER-STRIPS

UNIVERSAL BREADBOARDING ELEMENTS WITH SOLDERLESS PLUG-IN TIE POINTS

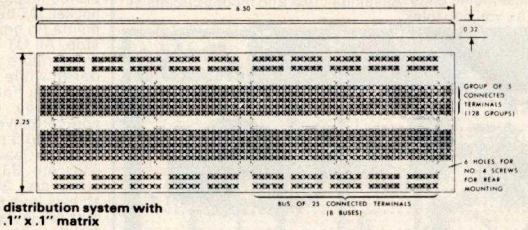

- Combine distribution system with universal .1" x .1" matrix
- 840 solderless, plug-in tie-points
- Accommodates up to 9 14-pin DIPs
- Compatible with all DIP's and discretes with lead diameters to .032"
- Require no special patch cords

The A P Super-Strips combine a power/signal distribution system with a matrix of 128 terminals, each with 5 tie points. The distribution system consists of eight buses, each individual bus consisting of a line of 25 tie points. All tie points are the solderless, plug-in type of the same design used on A P Terminal Strips and A P Distribution Strips.

The Super Strip will accept all DIP's, TO-5's and discrete components with lead diameters up to .032 inches. As many as nine 14-pin DIP's can be accommodated. Any solid wire up to No. 20 A.W.G. can be used for interconnections.


Super-Strips may be permanently mounted with the integral non-shorting instant-mounting backing, or for quick removal, they may be mounted with screws (supplied) on panels up to 1/8" thick. Hardware and mounting templates are provided with every strip. Body material is acetal copolymer.

SS-2 (Alloy 770 terminals) *APA-923252* **$17.00**
SS-1 (Gold-plated terminals) *APA-923748* **$29.95**

TERMINAL and DISTRIBUTION STRIPS

Model 264L Terminal Strip, 128 five-tie-point terminals,
APP-923261 ..... **$12.50**


Model 212R Distribution Strip, 24 four-tie-point terminals,
APP-923277 ..... **$2.50**



Model 248L Terminal Strip, 96 five-tie-point terminals,
APP-923265 ..... **$10.00**

Model 209R Distribution Strip, 18 four-tie-point terminals,
APP-923281 ..... **$2.25**


BREADBOARDING BUILDING BLOCKS WITH UNIVERSAL MATRICES OF SOLDERLESS PLUG-IN TIE-POINTS




Model 264R Terminal Strip, 128 four-tie-point terminals,
APP-923289 ..... **$10.00**

Model 154R Terminal Strip, 54 four-tie-point terminals,
APP-923291 ..... **$6.00**

Model 606R Distribution Strip, 36 four-tie-point terminals,
APP-923293 ..... **$3.50**



NOTE THE HEIGHT OF ALL STRIPS IS .32 INCHES.



JUMPER WIRE KIT

Each kit contains 350 wires cut to 14 different lengths from 0.1" to 5.0".

Each wire is stripped and the leads are bent 90° for easy insertion.

Wire length is classified by color coding.


All wire is solid tinned 22 gauge with PVC insulation.

The wires come packed in a convenient plastic box.

APP-92335I JK-1...$10.95

for fast, solderless, plug-in circuit building and testing

All-Circuit Evaluator

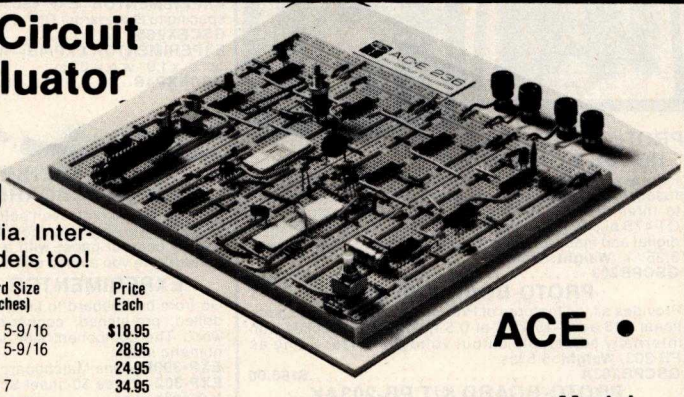

ACE • Model 236

Just plug in any components with leads to .032" dia. Interconnect with solid wire up to 20 ga. Assembled models too!

Part No.	ACE Model No.	Tie Points	DIP Capacity	No. Buses	No. Posts	Board Size (Inches)	Price Each
APP-923333	200-K (kit)	728	8 (16's)	2	2	4-9/16 x 5-9/16	$18.95
APP-923332	208 (assem.)	872	8 (16's)	8	2	4-9/16 x 5-9/16	28.95
APP-923334	201-K (kit)	1032	12 (14's)	2	2	16 x 7	24.95
APP-923331	212 (assem.)	1224	12 (14's)	8	2	4-9/16 x 7	34.95
APP-923326	218 (assem.)	1760	18 (14's)	10	2	6-1/2 x 7-1/8	46.95
APP-923325	227 (assem.)	2712	27 (14's)	28	4	8 x 9-1/4	59.95
APP-923324	236 (assem.)	3648	36 (14's)	36	4	10-1/4 x 9-1/4	79.95


Gold-anodized aluminum base/ground; non-corrosive nickel-silver terminals: 4 rubber feet. SHIPPING WEIGHT - 2 LBS.

CA, AK, HI, CALL (213) 894-8171

PRIORITY ONE ELECTRONICS

PROTO-BOARD® UNITS

All the speed and convenience of QT sockets and Bus Strips plus backplanes and binding posts in both kits and preassembled units. Assemble, test and modify circuits as fast as you can think.

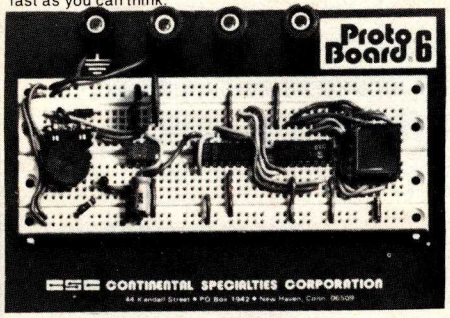

PROTO-BOARD PB-6 KIT— HOLDS 10, 14 PIN IC'S

Contains one preassembled QT-47S socket, two preassembled QT-47B bus strips, four binding posts, metal ground/base plate, non-marring feet and all hardware. Ten minute assembly time. **Size:** 6" l. x 4" w. x 1.4" h. **Weight:** 7 ozs.
GSCPB6 .....**$19.95**

PROTO-BOARD PB-100 KIT— HOLDS 10, 14 PIN IC'S

Contains two preassembled QT-35S sockets, one preassembled QT-35B bus strip, two binding posts, non-metallic base plate, non-marring feet and all hardware. Ten minute assembly time. **Size:** 4.5" w. x 6" l. x 1.4" h. **Weight:** 7.5 ozs.
GSCPB100—Complete **$21.95**

PROTO-BOARD PB-101— HOLDS 10, 14 PIN IC'S

Fully assembled breadboard contains two QT-35S sockets and four QT-35B bus strips mounted on metal ground/base plate with non-marring feet. Excellent for audio and small digital projects. **Size:** 6.0" l. x 4.5" w. x 1.4" h. **Weight:** 9 ozs.
GSCPB101 .....**$25.00**

PROTO-BOARD PB-102— HOLDS 12, 14 PIN IC'S

Fully assembled breadboard contains two QT-47S sockets, three QT-47B bus strips and one QT-35B bus strip on a metal ground/base plate with non-marring feet. Excellent for intermediate digital needs **Size:** 7.4" l. x 4.5" w. x 1.4" h. **Weight:** 10 ozs.
GSCPB102 .....**$30.00**

PROTO-BOARD PB-103— HOLDS 24, 14 PIN IC'S

Fully assembled breadboard contains three QT-59S sockets, four QT-59B and one QT-47B bus strip, four binding posts on a metal ground/base plate with non-marring feet. Build calculators, interfaces, networks, etc. **Size:** 9" l. x 6" w. x 1.4" h. **Weight:** 21 ozs.
GSCPB103 .....**$50.00**

PROTO-BOARD PB-104— HOLDS 32, 14 PIN IC'S

Fully assembled breadboard contains four QT-59S sockets, seven QT-59B bus strips and four binding posts on a metal ground/base plate with non-marring feet. Build a CPU, encoder, complex display, etc. **Size:** 9.8" l. x 8" w. x 1.4" h. **Weight:** 29 ozs.
GSCPB104 .....**$66.00**



PROTO-BOARD PB-203— HOLDS 24, 14 PIN IC'S

Fully assembled breadboard contains built-in, short-proof, fused, 5 VDC at 1 amp, regulated power supply, in addition to three QT-59S sockets, four QT-59B bus strips, one QT-47B bus strip and four binding posts. Capacity for most digital and many analog projects. **Size:** 9.75" l. x 6.6" w. x 3.25" h. **Weight:** 5 lbs.
GSCPB203 .....**$105.00**

PROTO-BOARD PB-203A


Provides all the features of Proto-Board PB-203 with additional +15 and −15 VDC at 0.5 Amp power supplies with internally adjustable output voltages. **Size:** Same as PB-203. **Weight:** 5.5 lbs.
GSCPB203A **$160.00**

PROTO-BOARD KIT PB-203AK


Kit version of Model PB-203A. Kit contains all components of model PB-203A plus solder, hook-up wire and easy-to-follow instructions. **Weight:** 5.5 lbs.
GSCPB203AK **$136.00**

QUICK TEST SOCKETS AND BUS STRIPS

Universal breadboarding system eliminates the soldering iron. QT sockets provide terminals, each consisting of five pre-connected tie-points, running across the width of the socket. QT bus strips consist of two rows of connected tie-points (in groups of five) which run the length of the bus strip. All QT sockets and bus strips are molded of high-temperature plastic so that leads and wires can be soldered while plugged in. Specially engineered, large-aperture holes guide leads into contacts easily and effortlessly. Contacts are pre-stressed, spring-loaded, non-corrosive, nickel silver alloy. Average contact resistance is 0.5 milliohm initially; 0.4 milliohm after use. Any diameter lead from .015" to .032" may be used. All QT units are .33" thick; all sockets are 1.32" wide; all bus strips are .36" wide. Units mount with 4-40 flat-head screws from the front or 6-32 self-tapping screws from the rear. QT units feature unique snap/lock mechanism which mates units together in seconds to expand or contract a breadboard system at will.



CSC No.	Length Ins.	Mtg. Dimen., Ins.	Price
	QT SOCKETS		
GSC-QT-59S	6.5	6.2 x 0.7	$12.95
GSC-QT-47S	5.3	5.0 x 0.7	9.75
GSC-QT-35S	4.1	3.8 x 0.7	7.25
	QT BUS STRIPS		
GSC-QT-59B	6.5	6.2 x 0.7	2.75
GSC-QT-47B	5.3	5.0 x 0.7	2.50
GSC-QT-35B	4.1	3.8 x 0.7	2.20



EXPERIMENTOR BREADBOARDING SOCKETS

Solderless breadboarding sockets accept DIP's, transistors, LED's, resistors, capacitors, and most all types of discrete components, as well as #22-30 solid hookup wire. An interlocking system permits boards to be snapped together for optimum configuration for any circuit. Sockets are molded of durable, abrasion resistant material and feature prestressed, nickel-silver contacts. A vinyl plastic backing prevents shorts when sockets are mounted on metallic surfaces. Tie-points are alphanumerically identified for faster wiring and circuit tracing. Sockets can be used loose or fastened to a mounting surface.

EXPERIMENTOR EXP-300—With 0.3" center channel spacing to fit the smaller DIP's. Size, ⅜" d. x 2.1" w. x 6" lg.
GSCEXP300 .....**$12.00**

EXPERIMENTOR EXP-350—With 0.3" center channel spacing to fit the smaller DIP's. Size ⅜" d. x 2.1" w. x 3.6" lg.
GSCEXP350 .....**6.75**

EXPERIMENTOR EXP-325—With 0.3" center channel spacing to fit the smaller DIP's. Size ⅜" d. x 2.1" w. x 1.86" lg.
GSCEXP-325 .....**3.50**

EXPERIMENTOR EXP-600—With 0.6" center channel spacing to fit the larger DIP's. Size ⅜" d. x 2.4" w. x 6" lg.
GSCEXP600 .....**14.75**

EXPERIMENTOR EXP-650—With 0.6" center channel spacing to fit the larger DIP's. Size ⅜" d. x 2.4" w. x 3.6" lg.
GSCEXP650 .....**8.75**

EXPERIMENTOR EXP-4B—With 40-point bus strips. Size, ⅜" d. x 1.0" w. x 6.0" lg.
GSCEXP4B **4.75**



EXPERIMENTOR SCRATCHBOARD™ WORKPADS

Start breadboarding even before parts are assembled. Or, sketch a working breadboard and save it for later. Preprinted pads of paper with a light blue breadboard hole pattern give you a head start.

EXPERIMENTOR MATCHBOARD™

Go from breadboard to finished PC board non-stop. Predrilled, pre-etched, copper-clad PC boards speed the work. The component side is silk-screened with alphanumeric index.

EXP-300P—One Matchboard. Net Each **$2.70**
EXP-302—Three 50-sheet Scratchboard workpads. Net each **$3.30**
EXP-303—Two Matchboards and one EXP-300 Breadboard. Net Each **$16.00**
EXP-304—Two Matchboards, one EXP-300 Breadboard and one Scratchboard. Net Each **17.00**




LOGIC PROBES

CSC logic probes are the ultimate tools for digital design and testing. These hand-held units provide an instant overview of circuit conditions. Simple to use; just clip power leads to circuit's power supply, set logic family switch to TTL/DTL or CMOS/HTL. Touch probe to test node. Trace logic events and pulses through digital circuits. Even stretch and latch for easy pulse detection. Instant recognition of high, low or invalid levels, open circuits and nodes. Simple, dual-level detector LED's tell it quickly, correctly. HI (Logic "1"); LO (Logic "0"). Also incorporates blinking pulse detector, e.g., HI and LO LEDs blink on or off, tracking "1" or "0" states at square wave frequencies up to 1.5 MHz. Pulse LED blinks during pulse transition. Choice of three models to meet individual requirements; budget, project and speed of logic circuits.


LP-1 LOGIC PROBE—Hand-held logic probe provides instant reading of logic levels for TTL, DTL, HTL or CMOS. **Input Impedance:** 100,000 Ohms. **Min. Detectable Pulse:** 50 ns. **Max. Input Signal (Frequency):** 10 MHz. **Pulse Detector (LED):** High speed train or single event. **Pulse Memory:** Pulse or level transition detected and stored. **GSCLP1** **$50.00**

LP-2 LOGIC PROBE—Economy version of Model LP-1. Safer than a voltmeter. More accurate than a scope. **Input Impedance:** 300,000 Ohms. **Min. Detectable Pulse:** 300 ns. **Max. Input Signal (Frequency):** 1.5 MHz. **Pulse Detector (LED):** High speed train or single event. **Pulse Memory:** none. **GSCLP2** **$28.00**
GSLP3—High speed logic probe. Captures pulses as short as 10 ns. **Input Impedance:** 500,000 Ohms. **Minimum Detectable Pulse:** 6 ns. **Max. Input Signal (Frequency):** 60 MHz. **Pulse Detector (LED):** High speed train or single event. **Pulse Memory:** Pulse or level transition detected and stored. **GSCLP3** **$77.00**



DIGITAL PULSER

The ultimate in speed and ease of operation. Simply connect clip leads to positive and negative power, then touch DP-1's probe to a circuit node; automatic polarity sensor detects circuit's high or low condition. Depress the push-button and trigger an opposite polarity pulse into the circuit. Fast, troubleshooting includes injecting signals at key points in TTL, DTL, CMOS or other popular circuits. Test with single pulse or 100 pulses per second via built-in dual control pushbutton button selects single shot or continuous modes. LED indicator monitors operating modes by flashing once for single pulse or continuously for a pulse train. Completely automatic, probe-size lab/field pulse generator for any family of digital circuits. **Output:** Tri-state. **Polarity:** Pulse-sensing auto-polarity. **Sync and Source:** 100 mA. **Pulse Train:** 100 pps. **LED Indicator:** Flashes for single pulse; stays lit for pulse train.
GSCDPI **$83.00**



LOGIC MONITOR

Trace signals through all types of digital circuits. Unit clips over any DIP IC up to 16 pins. Each of its 16 contacts connects to a single-bit level detector that drives a high-intensity, numbered LED readout activated when the applied voltage exceeds a fixed 2 V threshold. Logic "1" turns LED on; logic "0" keeps LED off. A power-seeking gate networks automatically locates supply leads and feeds them to the LM-1's internal circuitry. Saves minutes, even hours in design troubleshooting, debugging of equipment. **Voltage Threshold:** 2 V ±0.2 V. **Input Impedance:** 100,000 Ohms. **Input Voltage Range:** 4-15 V max. across any two or more inputs. **Current Drain:** 200 mA at 10 V. **Size:** 4" l. x 2" w. x 1.75" d. when open. **Weight:** 3 ozs.
GSCLMI **$60.00**

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS



LOGICAL ANALYSIS KITS

The increasing use and complexity of digital logic has created the need for portable and compact test equipment. The Logical Analysis Kits contain design/test/troubleshooting instruments that detect and locate logic problems, as well as component or mechanical failures, down to a specific IC pin. The Logic Pulser (the source) and the Logic Probe or Logic Monitor (detectors) instantly provide static and dynamic logic state analyses. These portable compact units save time in all phases of digital work.

GSC Model LTC-1 Logical Analysis Kit—Complete with LP-1 logic Probe, DP-1 Logic Pulser, LM-1 Logic Monitor, wiring accessories, manuals and molded case. . **$220.00**
GSC Model LTC-2 Logical Analysis Kit—For high-speed and memory analysis. Same as Model LTC-1, except substitutes LP-3 High-Speed Logic Probe **$250.00**



MAX100 100MHZ FREQUENCY COUNTER

Specifications.
Frequency Range: 20 Hz to 100 MHz guaranteed; 110 MHz typical. **Gate Time:** 1 sec. **Resolution:** 1 Hz. **Accuracy:** ±1 count ± time base error. **Input Impedance:** 1 Magohm shunted by 56pF. **Coupling:** AC. **Sine Wave Sensitivity:** 30 mV RMS at 50 MHz. **Internal Time Base Frequency:** 3.579545 MHz crystal oscillator. **Stability:** ±3 ppm at 25°C. **Temperature Stability:** Better than 0.2 ppm/°C, 0-50°C Max. **Aging:** 10 ppm/year. **Display:** Eight 0.6" LED digits. **Lead-Zero Blanking:** Decimal point appears between 6th and 7th digit when input exceeds 1 MHz. **Overflow:** With signals over 99,999,999 Hz, most significant (left hand) digit flashes, allowing readings in excess of 100 MHz. **Display Update:** 1/6 sec. plus 1 sec. gate time. **Low Battery Indicator:** When battery supply falls below 6.6 VDC, all digits flash at 1 Hz. **Power Required:** Internal, 6 "AA" cells; external, 110 or 220 VAC charger/eliminator, auto cigarette lighter adapter or 7.2-10 VDC external supply. **Battery Charging:** 12-14 hrs. **Size:** 1.75"h. x 5.63" w. x 7.75" d. **Weight:** Less than 1.5 lbs. with batteries

CSC Model MAX-100 Frequency Counter— $149.00

MAX-100 ACCESSORIES

GSC 100-CA1—100 VAC Charger/eliminator **12.45**
GSC 100-IPC—Input cable with clip leads **7.45**
GSC Model PS-500 Prescaler—500 MHz 10:1 ....**70.00**
GSC 100-CC—Carrying case **12.45**






MAX-50 FREQUENCY COUNTER

A mini-sized, hand-held frequency counter featuring the latest LSI circuitry and advanced engineering provides accurate frequency measurement and operating simplicity. Can be used to check AM, CB. Business Radio, audio, ultrasonics and many others. **Frequency Range:** 100 Hz to 50 MHz. **Input Impedance:** More than 1 Megohm, diode protected. **Input Connector:** Miniature phone jack. **Input Coupling:** AC. **Sensitivity:** 30 mV from 100 Hz to 30 MHz; 100 mV from 30 MHz to 50 MHz. **Maximum Input:** 200 V p-p to 1 kHz; 75 V p-p from 1 kHz to 10 MHz; 50 V p-p to 50 MHz. **Time Base Accuracy:** ± 3 ppm at 25°C. **Temperature Stability:** Better than 0.2 ppm/°C from 0° C to 50° C. **Display:** Six 0.1" magnified LEDs with anti-glare window. **Zero Blanking:** All zeros to the left of the first significant digit are blanked; decimal points light automatically. **Display Update:** 6 per-second. **Power Requirements:** One 9 V alkaline battery or battery eliminator. **Size:** 3" h. x 6" w. x 1.5" d. **Weight:** 8 ozs.

GSC MAX-50—Frequency Counter $77.00
GSC MMAC2 AC Adapter—For 110 VAC **12.45**
GSC MMA4 Mini Antenna— **4.95**
GSC MM-IPC Input Cable Clip Leads— **4.95**
GSC MMC5 Carrying Case— **7.45**

MAX-550 FREQUENCY COUNTER
550 MHz VERSION OF ABOVE
GSC MAX-550— **$165.00**



6001 FREQUENCY COUNTER

Model 6001 bench-top frequency counter is designed for applications from audio to UHF, in communications, data processing, process control. RF and digital design, multiplex, etc. Exceptional flexibility in general-purpose lab and test-bench applications. Extremely accurate measurements from 50 Hz to 650 MHz. **Inputs (Front Panel):** Two inputs provided through front-panel BNC connectors. "A" input is for signal frequencies from 5 Hz to 100 MHz; 1 Megohm +25 pF input impedance; a low-pass filter provides 3 dB/octave rolloff at 50 KHz. "B' input is for signal frequencies from 40 to 650 MHz; 50 Ohms input impedance; fuse protected. **Gate Times:** Three pushbutton-selectable gate times (0.1, 1.0 and 10 sec.) provide resolutions of 10, 1 and 0.1 Hz respectively; a front-panel LED indicates gate-open condition. **Timebase:** A precision 10 MHz crystal oven oscillator (0.5 ppm, 0-50° C) provides internal reference, or an external reference may be selected by a rear-panel switch. The oven oscillator output is buffered and made available at a rear-panel BNC connector. A second rear-panel BNC connector provides the input connection for an external timebase reference signal. Use of an external timebase other than 10 MHz permits the 6001 to operate in a scaling (also called rescaling) mode, in which the output is presented in units othen than Hz. This permits the 6001 to be used as a directly-duplicating digital display in a number of applications, including transducer translation, flow monitoring, tachometry, etc. **Display:** 8-digit, 7-segments, 0.43" LED display features zero blanking. Decimal point indicates frequency in MHz. A contrast enhancement filter assures legibility, even in high ambient light conditions. Discrete front-panel LEDs provide Oven Ready, Overflow and Gate Open indications. In addition, the leftmost digit (of the 8-digit display) flashes to indicate counter overflow. **Controls:** Power, Gate Time Select, A/B Input Select, Low Pass Filter In/Out, Internal/External Time Base (rear-panel). **Power Required:** 105-135 VAC, 57-63 Hz, 10 VA max; 215-250 VAC, 50-60 Hz version available. **Operating Temperature:** 0-50° C. **Size:** 3" h. x 10" w. x 7" d. **Weight:** 3 lbs.


Frequency Counter—Net Each **$385.00**
Input Fuse Kit—Includes two miniature 1/10 amp fuses (for B input protection). Net per Kit **$7.50**



5001 UNIVERSAL COUNTER-TIMER

Designed for electronic measurements and display of frequency, period, interval and counted events. Unique full input signal conditioning on both channels, including attenuators, slope selection and variable trigger level. Variable delay between measurements. **Frequency:** Up to 10 MHz in four ranges. **Selectable Gate Times:** .01, 0.1, 1.0 or 10 seconds. Display indicates frequency (in KHz) at A input. **Period:** Measures period of signal at A input, 400 nsec. to 10 sec.; measures signal cycle or averages over 10, 100 or 1,000 cycles. Display indicates time period. **Frequency Ratio:** Counts number of cycles occurring at A input (to 10 MHz) during one cycle at B input (to 2 MHz), or averages over 10, 100 or 1,000 cycles at B input. Useful for scaling measurements. Display indicates ratio F_A/F_B. **Time Interval:** Measures time between given signal edge occurring at A input (starts measurement) and given edge occurring at B input (ends measurement), from 200 nsec. to 10 sec. May average over 10, 100 or 1,000 intervals, or measure single interval. **Event Count:** Counts up to 99,999,999 events at up to 10 MHz. "Run" pushbutton enables counting with running count continuous displayed: when "hold" button is pushed displayed count is frozen while counting continues; returns to continuous display when the "Run" button is pushed again. Third ("Reset") button resets count. **Delay:** Variable control causes 75 msec. to 7.5 sec. delay between measurement cycles to facilitate viewing or recording of displayed readings. Detent position freezes display indefinitely following next measurement cycle. **Full Signal Conditioning On Both Inputs:** Both inputs incorporate x1/x10/x100 selectable attenuator. +/— slope selector and variable trigger level control. Both inputs are 1 Megohm at 25 pf, DC coupled. **Display:** Bright, 8-digit, 7-segment, 0.43" LED display, drive for high visibility. Decimal point position gives frequency measurements in KHz, time measurements in micro-seconds. Discrete LED indicators show overflow (when count exceeds 99,999,999) and gate-open conditions. **Operating Temperature:** 0-50° C. **Power Required:** 105-135 VAC, 57-63 Hz, 10 VA max.; 215-250 VAC, 50-60 Hz version available. **Size:** 3' h. x 10" w. x 7" d. **Weight:** 3 lbs.


GSC5001 Universal Counter-Timer—Net Each .**$360.00**



2001 FUNCTION GENERATOR

Signal generator with advanced IC circuitry produces stable, low-distortion sine waves (less than 2% THD), fast, rise-and-fall-time square waves (less than 100 nsec.), high-linearity triangle waves (better than 1%) and TTL square waves with rise and fall time less than 25 nsec. Frequency is accurate, calibrated ±5% and sweepable up to 100:1. A voltage-controlled oscillator allows generator's frequency to be remotely shifted or swept by an AC or a DC voltage fed into the "Sweep In" jacks. A DC voltage provides a directly proportional shift in frequency, while an AC voltage provides a frequency-modulated sweep. Two shortproof, 600-Ohm outputs are adjustable from 1 mV to 100 mV p-p, open circuit and 100 mV to 10 V p-p, open circuit, with better than ±.5 dB flatness. Variable DC Offset control (push-button selectable) provides controlled, variable shifting of output waveform's center line above or below zero. **Frequency Range:** 1 Hz to 100 KHz in 5 overlapping decade ranges, pushbutton selectable, with a 10:1, 50-increment vernier dial; 1-10 Hz. 10-100 Hz. 100-1000 Hz. 1-10 KHz, 10-100 KHz. **Dial Accuracy:** ±5% of dial setting; calibrated at 10 Hz, 100 Hz, 1 KHz and 10KHz. **Sine Wave Distortion:** Less than 2% THD over frequency range. **Triangle Wave Linearity:** Better than 1% over frequency range. **Square Wave Rise and Fall Times:** Less than 100 nanosec. with 600 Ohms, 20 pF termination. **Time Symmetry:** Less than ±2%; TTL square wave output with rise and fall times less than 25 nanosec. **Sweep Range:** Maximum 100:1; maximum linear range, 10:1 at any dial setting. **Sweep Input:** 0 to ±10 Volts. **Input Impedance:** 30K Ohms. **Main Output:** Sine, square and triangle waveforms, pushbutton selectable; Hi Level, 0.1-10 V p-p open ckt, .05-5 V p-p into 600 Ohms; Lo Level (-40 dB), 1-100 mV, open ckt. .5-50 mV into 600 Ohms. **Amplitude Control:** Variable; greater than 40 dB range. **Amplitude Flatness:** Less than ±0.5 dB. **DC Offset Control:** Variable ±5 V into open ckt.; pushbutton in/out switch. **Max. DC Offset: (AC + DC) components before clipping):** Hi output, ± 10 V max.; Lo output, ±1 V max. **TTL Square Wave Output:** 10 TTL loads; rise and fall time, less than 25 nsec. **Power Required:** 105-125 VAC, 50/60 Hz; 6 Watts; 220-240 VAC, 50/60 Hz optional. **Operating Temperature:** 0° to 50° C (calibrated at 25° C ±5%). **Size:** 10" w. x 3" h. x 7" d. **Weight:** 2.2 lbs.

GSC2001 Function Generator—Net Each **$186.00**




4001 DIGITAL PULSE GENERATOR

A precision digital pulse generator that combines compact size with outstanding performance. Symmetrical and asymmetrical pulses over a wide range of frequencies, duty cycles and amplitudes. Fast rise and fall times; less than 30 nsec. Independent pulse width and spacing controls. Continuous/manual one-shot operation. External triggering; DC to 10 MHz. Synchronous output gating. Square wave and complementary output. In the Gate mode, output is synchronized with leading edge of input gate signal; last output pulse is always completed, even in absence of gate signal. **Frequency Range:** 0.5 Hz to 5 MHz. **Pulse Width and Spacing Controls:** 100 nsec. to 1 sec. in 7 overlapping decade ranges. **Variable Width and Spacing Controls:** Concentric, single-turn verniers provide continuous adjustment between ranges; pulse spacing controls not active during Trigger. Gate and One-Shot modes. **Duty Cycle:** 10^7 to 1 range, continuously adjustable, 0.5 Hz to 5 MHz. **Accuracy:** ±5% of control settings; calibrated at min. and max. of vernier settings. **Pulse Jitter:** Less than .1% ±50 ps. **Run Mode:** 0.5 Hz to 5 MHz frequency selectable through pulse width and spacing controls. **Trigger Mode:** DC to approx. 10 MHz, from external source. **Gate Mode:** Generator starts synchronously with leading edge of gate signal. **One-Shot Mode:** Momentary pushbutton for single-pulse operation; pulse occurs each time button is depressed. **Square Wave:** Pushbutton provides square wave at output. **Complement:** COMPL pushbutton inverts output signal without losing sync time reference. **TRIG/GATE Input Requirements:** TTL compatible; sine waves, 4 V p-p pulses, 2 V peak, greater than 40 nsec. wide; input impedance, approx. 400 Ohms, DC coupled; max. input level, ±10 V. **VAR OUT:** Amplitude, 0.1-10 V into open circuit, adjustable by single-turn vernier; rise/fall time, less than 30 nsec.; impedance, constant 50 Ohms. **TTL OUT:** Fan out, 40 TTL loads; sink, 64 mA at 0.8 V max.; rise/fall time, less than 20 nsec. **SYNC OUT:** Amplitude, 2.4 V min. fan out, 10 TTL loads; sink, 64 mA at 0.8 V max.; rise/fall time, less than 20 nsec.; pulse width, greater than 20 nsec.; sync pulse lead time, greater than 20 nsec. **Operating Temperature:** 0° to 50° C (calibrated at 25° C ±5° C). **Power Required:** 105-125 VAC, 50/60 Hz, 6 Watts; 220-240 VAC, 50/60 Hz optional. **Size:** 10" w. x 3" h. x 7" d. **Weight:** 2.2 lbs.

GSC4001 Digital Pulse Generator—Net Each ..**$235.00**


WE ACCEPT VISA, and MASTER-CHARGE

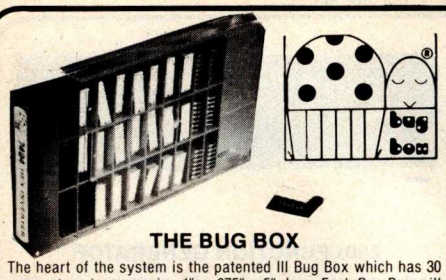

THE BUG BOX

The heart of the system is the patented III Bug Box which has 30 compartments measuring 1" x .375" x 5" deep. Each Bug Box will store 60 eight-pin DIPs, 30 fourteen-pin DIPs, 30 sixteen-pin DIPs or 30 other small components such as transistors, diodes, resistor networks, etc. The transparent cover has a stairstep design that allows the user to empty one compartment at a time. A numbering system on the cover gives an instant count of remaining ICs.

CONSTRUCTION—heavy duty high impact injection molded styrene

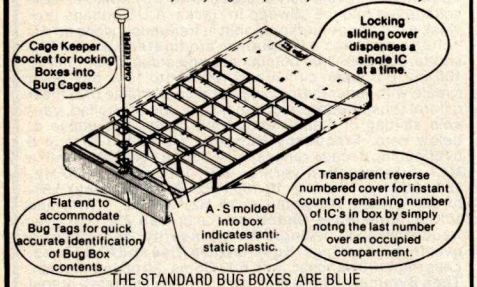


THE STANDARD BUG BOXES ARE BLUE


					Sh.Wt.
III-BGX-001	Bug Box Single Pack	$ 1.98	III-BGX-001A	$ 2.98	2 oz.
III-BGX-003	Bug Box 3 Pack	$ 5.49	III-BGX-003A	$ 8.00	6 oz.
III-BGX-010	Bug Box 10 Pack	$ 17.49	III-BGX-010A	$ 26.00	2 lbs.
III-BGX-250	Bug Box 250 Pack	$399.95	III-BGX-250A	$599.95	20 lbs.

"A" Indicates Anti-Static Plastic Construction

LSI BUG BOX (Big Bug Box)

The LSI Bug Box is designed to store large IC's and provides separate compartment storage for 8, 10, 12, 14, 16, 18, 20, 22, 24, 28 and/or 40 pin IC's. The basic box is permanently divided into three permanent compartments measuring 1 x 4.15 x .5 inches deep. Divider guides are molded into the bottom of the box in strategic locations to allow the use of user inserted dividers (two types supplied) to further divide the box into storage for all of the standard LSI IC types as shown below.

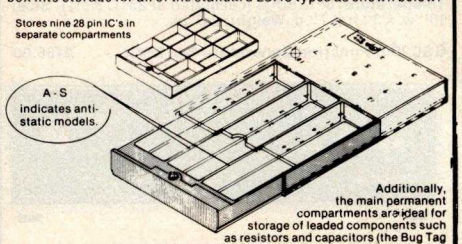



Stores eighteen 20 or 22 pin IC's in separate compartments


Stores six 40 pin IC's in separate compartments.

Any molded groove location may be used for divider location to build any desired compartment configuration.

III-BLX-001	LSI Bug Box Single Pack	$ 2.96	III-BLX-001A	$ 3.98	
III-BLX-003	LSI Bug Box 3 Pack	$ 8.29	III-BLX-003A	$ 10.95	
III-BLX-010	LSI Bug Box 10 Pack	$ 26.49	III-BLX-010A	$ 34.95	
III-BLX-250	LSI Bug Box 250 Pack	$599.95	III-BLX-250A	$799.95	

"A" Indicates Anti-Static Plastic Construction


III-BDV-012	2 sets of 12 extra LSI Dividers	$1.49	1 oz.



BUG TRAYS


Bug Trays offer storage for larger components or tools. Available in three styles. Bug Tray Open has a single open compartment measuring 3.05" wide x 4.6" long x .6" deep. Bug Tray Vertical has five storage areas measuring .5" wide x 4.6" long. Bug Tray Horizontal has eight areas measuring .4" wide x 3.95" long.

			Sh.Wt.
III-BTV-001	Bug Tray Vertical, Single	$ 1.49	1 oz.
III-BTV-010	Bug Tray Vertical, 10 Pack	$12.98	10 oz.
III-BTH-001	Bug Tray Horizontal, Single	$ 1.49	1 oz.
III-BTH-010	Bug Tray Horizontal, 10 Pack	$12.98	10 oz.
III-BTO-001	Bug Tray Open, Single	$ 1.49	1 oz.
III-BTO-010	Bug Tray Open, 10 Pack	$12.98	10 oz.
III-BTX-003	Bug Tray Mixer, 3 Pack	$ 3.98	3 oz.

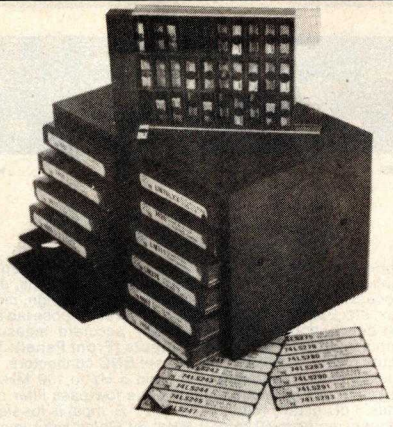

THE BUG BOX SYSTEM

The Bug Box System provides a complete storage/protection/identification and retrieval capability for integrated circuits or other small components or tools. The system is totally modular and can be as small as a single Bug Box in a field engineer's tool kit or as large as the complete storage/indexing and retrieval for the thousands of different ICs and semiconductors used in a major research and development laboratory.

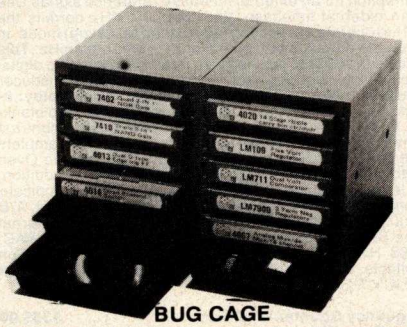

BUG CAGE

The Bug Cage will store either a Bug Box or a Bug Tray in any of its 12 storage locations, and its modular design allows it to be attached to other Bug Cages, either vertically or horizontally, to build storage libraries of any size. The ends of the Bug Boxes or Bug Trays are exposed so that Bug Tag identification labels, on the ends, are visible.


			Sh.Wt.
III-BGC-001	Bug Cage, Single	$ 10.95	2 lbs.
III-BGC-012	Bug Cage, 12 Pack	$114.95	15 lbs.

CAGE KEEPERS

Cage Keepers pin a column or Bug Boxes into the storage compartment of a Bug Cage for protection against casual use or theft and for transportation. Keepers are available in a 5" model for a single cage and a 10" model for cages stacked two high.

			Sh.Wt.
III-CKP-005	5" Cage Keepers, Pkg. of 2	$3.98	3 oz.
III-CKP-010	10" Cage Keepers, Pkg. of 2	$4.98	15 oz.


Colors: *The standard Bug Boxes and Cages are blue; yellow, red and white are available at extra cost.*

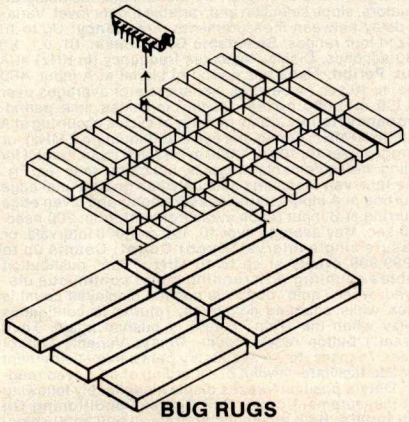

BUG RUGS

Bug Rugs provide the necessary static discharge for CMOS MOSFET devices. Bug Rugs are made of high carbon content foam which will effectively short all of the pins together when they are inserted into the foam. Die cut to the exact dimensions of the Bug Box compartments. Each package contains 30 Bug Rugs to line the 30 compartments of a Bug Box.


			Sh.Wt.
III-BGR-030	Bug Rug, Pkg. of 30	$ 1.98	1 oz.
III-BGR-300	Bug Rug, Pkg. of 300	$14.98	4 oz.
III-BBR-036	LSI Bug Rug, Pkg. of 6	$ 1.98	1 oz.
III-BBR-060	LSI Bug Rug, Pkg. of 60	$14.98	4 oz.

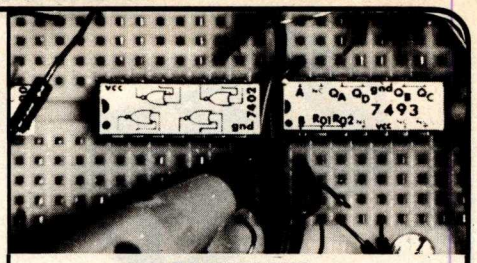

BACK PACKS

Each Back Pack label is imprinted with the exact internal logic of a specific IC as well as the pinout of this logic to the pins of the IC. When Back Packs are affixed to the IC and the IC is in the circuit, the user can trace logic connections without needing data sheets or counting pins. Each Back Pack family packet contains 532 labels and each is imprinted with the logic and pinout of the most popular ICs within that logic family. Labels are die-cut and are self-adhesive to stick to the IC. Several blank labels are included in each family packet for special labels.


			Sh.Wt.
III-BPT-012	TTL Family Back Packs	$ 5.98	2 oz.
III-BPC-012	CMOS Family Back Packs	$ 6.98	2 oz.
III-BPM-012	Combination of TTL/CMOS Packs	$10.98	4 oz.
III-BPU-012	Over 700 Back Pack Labels covering the most popular CPU's, RAMS, UARTS, Clocks, PIA, PROMS, Drives, and much more	$ 9.95	3 oz.



BUG TAGS

Bug Tags are self-adhesive labels, die-cut to the exact dimensions of the front edge of a Bug Box. They are pre-printed with the numbers and descriptions of the ICs in the most popular logic families. They are packaged by logic families and each Bug Tag package contains 200 or more labels.

			Sh.Wt.
III-BTT-200	TTL Bug Tag Family	$ 3.98	2 oz.
III-BTC-200	CMOS Bug Tag Family	$ 3.98	2 oz.
III-BTK-200	LS Shottky Family	$ 3.98	2 oz.
III-BTS-200	LINEAR Bug Tag Family	$ 3.98	2 oz.
III-BTM-800	Contains ALL 800 labels above	$13.95	8 oz.
III-BTU-300	MICROPROCESSOR Bug Tags	$ 5.98	3 oz.
III-BTR-300	RESISTOR 300 labels (900 valves)	$ 5.98	3 oz.
III-BTP-300	CAPACITOR 300 labels (900 valves)	$ 5.98	3 oz.
III-BTZ-200	DIODES & ZENERS, Bug Tag Family	$ 3.98	2 oz.
III-BTD-200	DIP RESISTOR, Bug Tag Family	$ 3.98	2 oz.



PROTO-PAK

Proto-Pak's provide the basic IC set for general CMOS and/or TTL prototyping or troubleshooting. Proto-Pak includes 30 different IC's, Back Pack labels for each, a Bug Box to house them in, and Bug Tags to locate them easily.

			Sh.Wt.
III-PPT-030	TTL PROTO-PAK	$39.95	4 oz.
III-PPC-030	CMOS PROTO-PAK	$49.95	4 oz.

III-BTF-012	$ 2.98	1 oz.

Field Engineering Kit Bug Tags (rear compartment labels) are used whenever more than one type of IC (or other component) is to be stored in a single box. The Bug Tag FE Kit contains 12 labels designed to mount on the rear cover of a Bug Box for user written or typed identification of different contents for each of the 30 compartments in the box.



PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS

MICRO PROCESSOR BASED DIGITAL CAPACITANCE METER.

THE STANDARD AGAINST WHICH ALL OTHERS WILL BE MEASURED



μC PROBE®

FEATURES & FUNCTION

- .1% accuracy
- .1pF-100F range
- .1pF resolution
- Full 4 digit custom LCD display
- Temp. oven
- Auto Ranging
- Auto Zero Mapping
- Leading zero blanking

III-CP3001

$299.95

- **Microprocessor based**
- **Programmed for field upgrades & future expansion**

- Limits comparator (up to 16 simultaneous sets of limits)
- DA (dielectric absorption) Measurement
- Leakage measurement
- Four level 16 keypad for user interface & control
- Battery (auto or marine) or AC operation
- 6502 Microprocessor based
- ROM (2K or more depending upon options)
- RAM (1K or more depending upon options)
- BCD output for printer or other interface
- Single cycle or continuous operating modes
- Programmed pitch and duration audio for eyes off limits comparison testing & keyboard entry
- Limits independent of range—any limit can be from .1 pF to 1 F.
- 25 turn trimmers (internal) for range calibration and temp. setting
- Binary search auto ranging
- Avg. auto search/measure and display time = 0.1 sec. for values to 100 ufd. max. =0.279 sec.
- Direct measurements of cap values to 1 F.
- Dual input C_X terminals for computer derived measurements of caps to 100 F.
- Dual regulated power supplies
- Limits entry by keypad or displayed or stored values and computer derived + or − % 'ages
- Nested multiple limits for simultaneous sorting of caps into increasing tolerance groups.
- Arithmetic average
- Statistical mean
- Standard deviation
- Statistical sampling function to determine probability of incoming batch within limits by measuring only a random sample of the batch
- Running mean calculation
- Ignore first x readings function
- Display average of x readings function

The u C-PROBE—offers advanced capacitance testing functions and statistical capabilities that are not available on any other capacitance meter at any price. The u C-Probe uses the powerful 6502 microprocessor for control and stored program functions which are simply not feasible with conventional instruments. Full auto ranging from .1 pF to 1 Farad is standard as is full auto ZERO. This automatically zeroes the effects of stray or lead capacitance—Rather than the cumbersome and time consuming zero control tweaking required with every other meter presently sold, the u C-Probe samples the offset stray or lead capacitance for each of its internal ranges and stores the result in random access memory. It then subtracts these zero offset values from each reading before display or use in other calculations. Zero mapping automatically occurs at turn-on, after the reset button is pressed or it may be initiated at any time by pressing key 1D. An exclusive audio output allows "eyes off" sorting of capacitors and gives audio feedback for other C-Meter functions and key entry. The u C-Probe's .1% accuracy and .1 pF resolution place it in the post doctorate class of capacitance meters.
Size: 8½ x 9 x 3 inches (excluding tilt stand/handle). Weight: 3½ lbs. Made in U.S.A. **III-CP3001 $299.95**

QC-NOTCH—Adds Limits comparator capability to basic unit—allows user setting of up to 16 simultaneous sets of independent limits—i.e., lower limit could be .1 pF and upper limit 1 Farad if required. Limits indication by LCD displayed "up arrow" and "high" for over upper limit, "down arrow" and "low" for under lower limit and bar with "OK" for "in range." Also displays L-01 through L-16 to show which multiple limit the capacitor fell into in multiple limits testing. Provides audio signals to denote High, Low or coded signal for the exact Limits range for multiple limits testing.
Size: Internal to main unit. Weight: 1 oz. additional weight. Installed when ordered with basic unit. Plug-in ROM-user installable. **III-QCN002 $149.95**

STATISTICS option—Provides extensive statistical monitoring in QC and other applications. Provides statistical mean, running average, standard deviation and ignore first readings capabilities as well as random sample testing rather than total batch testing for incoming acceptance/rejection of large shipments of capacitors.
Size: Internal to main unit. Weight: 1 oz. additional weight. Installed when ordered with basic unit. Plug-in ROM-user installable. **III-STT001 $149.95**

TEMP OVEN option—Houses XTAL time base and critical C-measurement components in a closely controlled (1°C) temperature oven.
Size: Internal to main unit. Weight: 4 oz. additional. Installed when ordered with basic unit. Factory ONLY installation. **III-XVN001 $79.95**

EXTENDED MSM RANGE—Extends the basic measurement functions to DA and Leakage + extends upper range to several hundred Farad.
Size: Internal to main unit. Weight: 1 oz. additional. Installed when ordered with basic unit. Factory ONLY installation. **III-EMR001 $99.95**

BCD OUTPUT—Provides an output port from the 6502 microprocessor with BCD information and handshaking signal lines to interface with printers/recorders or other equipment.
Size: Internal to main unit but including rear panel connector. Weight: 2 oz. additional. Installed when ordered with basic unit. Factory ONLY installation. **III-BCD001 $99.95**

AC ADAPTOR—Allows AC operation of u C-Probe. UL listed unit operated on 115 VAC and plugs into AC Adaptor jack on rear panel.
Size: 2 x 2 x 2 inches. Weight: 1 lb. **III-MAC800 $19.95**

For your convenience, we recommend that you order factory options with order for basic unit.


HITACHI
Hitachi Denshi America, Ltd.

Single and dual trace, 15 and 30 MHz. All four high sensitivity Hitachi oscilloscopes are built to demanding Hitachi quality standards and are backed by a 2-year warranty. They're able to measure signals as low as 1mV/division (with X5 vertical magnifier). It's a specification you won't find on any other 15 or 30 MHz scopes. Plus: Z-axis modulation, trace rotation, front panel X-Y operation for all four scope models, and X10 sweep magnification. And, 30 MHz oscilloscopes offer internal signal delay lines. For ease of operation, functionally-related controls are grouped into three blocks on the color coded front panel. Now here's the clincher: For what you'd expect to pay more, you actually pay less. Check our scopes before you decide. All scopes come complete with probes.

Hitachi...The measure of quality.

List Price $735.00
Our Price **$650.00**
HIT-V-152B

List Price $995.00
Our Price **$859.00**
HIT-V-302B

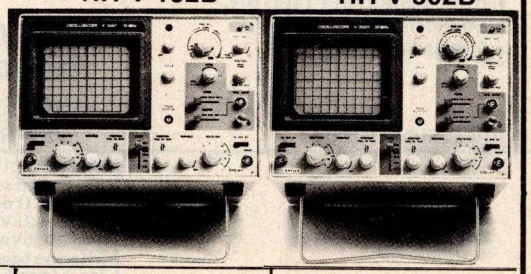

	HIT-V-152B	HIT-V-302B
• CRT	130BUB31 (5-inch, round shape)	130BTB31 (5-inch, round shape)
Display area	8x10div (1div=9.5mm)	8x10div (1div=9.5mm)
Acceleration potential	Approx. 2kV	Approx. 4kV
Intensity modulation	Over 5Vp-p	Over 5Vp-p
• Vertical deflection		
Sensitivity and bandwidth	5mV/div~5V/div ±5%, DC~15MHz, −3dB 1mV/div~1V/div ±6%, DC~5MHzTyp, −3dB (Using x5 amplifier)	5mV/div~5V/div ±5%, DC~30MHz, −3dB 1mV/div~1V/div ±6%, DC~5MHz −3dB (Using x5 amplifier) Typ,
Rise time	24ns	12ns
Non-distorted Max. amplitude	More than 4 div at 15MHz	More than 4 div at 30MHz
Signal delay line	——	Permits viewing leading edge of displayed waveform
Input R and C	Direct 1M ohm, approx. 30pF	Direct 1M ohm, approx. 30pF
Maximum input voltage	600Vp-p or 300V(DC+AC peak)	600Vp-p or 300V(DC+AC peak)
Display mode	CH1, CH2, DUAL, ADD, DIFF	CH1, CH2, DUAL, ADD, DIFF
X-Y operation	DC~500kHz, 5mV/div~5V/div Phase difference DC~10kHz 3°	DC~500kHz, 5mV/div~5V/div Phase difference DC~10kHz 3°
• Horizontal deflection		
Sweep mode	AUTO, NORM, TV (+), TV (−)	AUTO, NORM, TV (+), TV (−)
TV synchronization	TV sync-separator circuit	TV sync-separator circuit
Internal	Over 1div (V sync-signal)	Over 1div (V sync-signal)
External	Over 1Vp-p (V sync-signal)	Over 1Vp-p (V sync-signal)
Trigger sensitivity	Frequency / Internal / External 20Hz~2MHz 0.5div 200mV 2~15MHz 1.5div 800mV	Frequency / Internal / External 20Hz~5MHz 0.5div 200mV 5~30MHz 1.5div 800mV
Trigger slope	±	±
Sweep time	0.2μs/div~0.2s/div ±5%, 19 calibrated steps	0.2μs/div~0.2s/div ±5%, 19 calibrated steps
Sweep-time magnifier	10 times (±7%)	10 times (±7%)
Max. sweep rate	100ns/div	100ns/div
• Amplitude calibrator		
Waveform	1kHz ±10% Typ, Square wave	1kHz ±10% Typ, Square wave
Voltage	0.5V ±3%	0.5V ±3%
• Power requirements	100V (120/220/240V) ±10% 50/60Hz, 40W	100V (120/220/240V) ±10% 50/60Hz, 40W
• Dimensions	Approx. 275(W)x190(H)x400(D)mm	Approx. 275(W)x190(H)x400(D)mm
• Weight	Approx. 8.5kg	Approx. 8.5kg
• Ambient operation temperature	0~+40°C	0~+40°C
• Probe	AT-10AB1.5. 2	AT-10AB1.5. 2

HIT-V151B (Single trace version of **HIT-V152B**)

List Price $570.00

Our Price **$525.00**


WE ACCEPT VISA, and MASTER-CHARGE

PRIORITY ONE ELECTRONICS

Hitachi...The measure of quality.

HITACHI
Hitachi Denshi, Ltd.

- Dynamic range 8 div.
- TV sync-separator circuit
- Built-in signal delay line (V-352)
- X-Y operation
- Sweep-time magnifier (10 times)
- Trace rotation system
- Fine-adjusting, click-positioning function
- Economically priced 20MHz dual trace oscilloscope
- Square CRT with internal graticule (illuminated scale)
- High-accuracy voltage axis and time axis set at ±3% (certified at 10° to 35°C)
- High-sensitivity 1mV/div.
- Low drift
- 2 Year Warranty

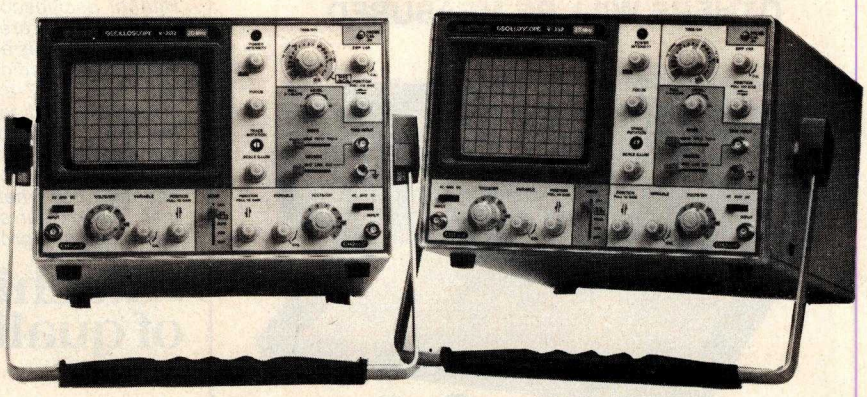

SPECIFICATIONS:	HIT-V202 20MHz DUAL TRACE LIST PRICE: $850.00 OUR PRICE: $798.00	HIT-V352 35MHz DUAL TRACE WITH DELAY LIST PRICE: $1150.00 OUR PRICE: $998.00
• CRT	140BMB31R (5.5-inch square with internal graticule, illuminated scale)	140DFB31 (5.5-inch square with internal graticule, illuminated scale)
Display area	8x10div (1div=9.4mm)	8x10div (1div=9.4mm)
Acceleration potential	Approx. 2kV	Approx. 5.2kV
Intensity modulation	Voltage: 5Vp-p or more Effective band-width: DC to 2MHz Input impedance: 47kΩ (type) Max. input voltage 300V (DC + AC peak)	Voltage: 5Vp-p or more Effective band-width: DC to 2MHz Input impedance: 47kΩ (typ) Max. input voltage: 300V (DC + AC peak)
• Vertical deflection		
Sensitivity	5mV/div to 5V/div ±3%, 9-step changeover (When using x5 amplifier) 1mV/div to 1V/div ±5% Continuously variable when using x2.5 amplifier with fine adjustment (provided with click-positioning function)	5mV/div to 5V/div ±3%, 9-step changeover (When using x5 amplifier) 1mV/div to 1V/div ±5% Continuously variable when using x2.5 amplifier with fine adjustment (provided with click-positioning function)
Bandwidth	DC to 20MHz, -3dB (at 8div) (When using x5 amplifier) DC to 7MHz, -3dB (at 8div)	DC to 35MHz, -3dB (at 8div) (When using x5 amplifier) DC to 7MHz, -3dB (at 8div)
Rise time	17.5ns, (for x5) 50ns	10ns, (for x5) 50ns
Signal delay line	—	Permits viewing leading edge of displayed waveform
Max. input voltage	500Vp-p or 300V (DC + AC peak, at 1kHz)	500Vp-p or 300V (DC + AC peak, at 1kHz)
Input connection	AG, GND, DC	AG, GND, DC
Input impedance	Direct 1M ohm, approx. 30pF	Direct 1M ohm, approx. 30pF
Operating modes	CH1, CH2, DUAL, ADD, DIFF	CH1, CH2, DUAL, ADD, DIFF
X-Y operation	CH1: X axis, CH2: Y axis	CH1: X axis, CH2: Y axis
Sensitivity	5mV/div to 5V/div (when using x5 amplifier: 1mV/div)	5mV/div to 5V/div (when using x5 amplifier: 1mV/div)
Phase difference	DC to 50kHz within 3°	DC to 50kHz within 3°
X bandwidth	DC to 500kHz, -3dB	DC to 500kHz, -3dB
Dynamic range	8div or more	8div or more
• Horizontal deflection		
Sweep mode	AUTO, NORM, TV (+), TV (-)	AUTO, NORM, TV (+), TV (-)
Sync signals	CH1, CH2, LINE, EXT	CH1, CH2, LINE, EXT
Sync connection	AC	AC
TV synchronization	TV sync-separator circuit	TV sync-separator circuit
Internal	1div or more (V sync-signal)	1div or more (V sync-signal)
External	1Vp-p or more (V sync-signal)	1Vp-p or more (V sync-signal)
Trigger sensitivity	Frequency / Internal / External 20Hz to 2MHz / 0.5div / 200mV 2 to 20MHz / 1.5div / 800mV	Frequency / Internal / External 20Hz to 5MHz / 0.5div / 200mV 5 to 35MHz / 1.5div / 800mV
AUTO low bandwidth	20Hz	20Hz
Trigger polarity	±	±
External sync input	Input impedance: approx. 1M ohm, 30pF or less Max. input voltage: 300V (DC + AC peak, at 1kHz)	Input impedance: approx. 1M ohm, 30pF or less Max. input voltage: 300V (DC + AC peak, at 1kHz)
Sweep time	0.2μs/div to 0.2s/div ±3%, 19 calibrated steps Continuously variable when using x2.5 amplifier with fine adjustment (provided with click-positioning function)	0.2μs/div to 0.2s/div ±3%, 19 calibrated steps Continuously variable when using x2.5 amplifier with fine adjustment (provided with click-positioning function)
Sweep time magnifier	10 times (±5%)	10 times (±5%)
Max. sweep rate	100ns/div (20ns/div or 50ns/div, not calibrated) Linearity: within 3% or ±5% when using x10	20ns/div Linearity: within 3% or ±5% when using x10
• Amplitude calibrator		
Waveform	Approx. 1kHz ±10% (typ), square wave	Approx. 1kHz ±10% (typ), square wave
Voltage	0.5V ±3%	0.5V ±3%
• Power requirements	100/120/220/240V ±10% 50 to 60Hz, approx. 45W	100/120/220/240V ±10% 50 to 60Hz, approx. 45W
• Weight	Approx. 8.5kg	Approx. 8.5kg
• Temperature		
Ambient operation temperature	0 to +40°C	0 to +40°C
Ambient temperature for guaranteeing specifications	+10 to +35°C	+10 to +35°C
• MTBF	20,000 hours (target value)	20,000 hours (target value)
• Accessories	Probe AT-10AF1.5 (10:1/1:1) . . . . . 2 Power cable . . . . . 1 Operation manual 1	Probe AT-10AF1.5 (10:1/1:1) . . . . . 2 Power cable . . . . . 1 Operation manual 1

WE ACCEPT VISA, and MASTER-CHARGE

PRIORITY ONE ELECTRONICS

HITACHI
Hitachi Denshi, Ltd.


V-550B 50 MHz Dual Trace Delayed Sweep Oscilloscope

Until now, if you wanted a 50 MHz dual trace oscilloscope of uncompromising quality, there was only one choice. Now there's a second... an outstanding new delayed sweep scope with an established name—the Hitachi V-550B.

The V-550B offers all the capabilities you expect from a lab grade oscilloscope—trigger view, a bright 6" square CRT, and a maximum sweep rate of 5 ns/div.—plus a few features you might not expect, such as 1 mV/div. sensitivity (10 MHz), automatic focus correction, and a built-in TV sync separator circuit.

The cost? Remarkably reasonable, especially when you compare it to the other leading 50 MHz scope. It's a price breakthrough made possible by using up-to-date production techniques and a design backed by over 20 years of oscilloscope experience.

The Hitachi Alternative

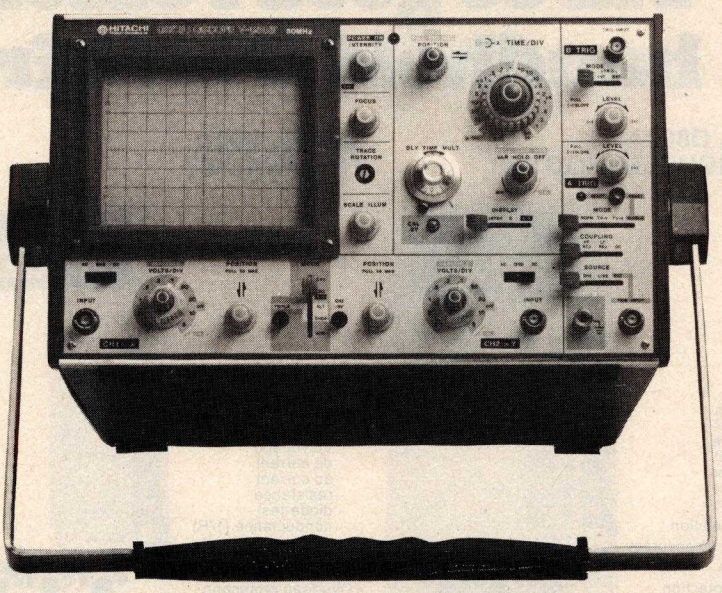

A REMARKABLE VALUE THE HIT-V550B *AT* $1745.00 (Probes Included)

SHPG. WT. 29 LBS.

A New C.R.T. Development
The large square C.R.T. of V-550B is most advantageous not only for dual trace operations, but also for third channel display of triggering signals. The diameter of the screen is 6" and the tube has an internal graticule. Care has been given to such details as graticule divisions in red which provide greater contrast in photography of data.

In the vertical axis, supplementary graticule markings of 0, 10, 90, and 100% are provided, which facilitates reading of rise time of pulse waves. Since these supplementary markings are in dots they do not interfere with ordinary measurements.

The use of an improved phosphor makes the new V-550B 10 kV tube as bright as old type 15 kV C.R.T.'s.

High Sensitivity: 1 mV/div. (10 MHz)
Sensitivity of 1 mV/div is useful for research and development in such applications as medical and biological experiments where signals are weak.

Automatic Focus Feature Eliminates Lag.
Loss of focus tends to occur when brightness or sweep range is altered. Automatic focus solves this problem, eliminating the necessity for adjustment each time.

Trace rotation system for easily adjusting bright-line inclination caused by terrestrial magnetism.
When bright lines are inclined by the influence of terrestrial magnetism, this rotation system promptly compensates and corrects lines to the proper locations, rendering accurate observation constantly feasible.

Third Channel Display (Trigger View)
In addition to CH1 and CH2, CH3 can be observed. Internal triggered signals and external triggered signals can be displayed as a third trace. This feature allows time comparisons to be made between external trigger signals and displayed waveforms.

X-Y Operation Convenient for Observation of Two Types of Waves.

Delayed sweep permits 1,000 X Magnification
One of the qualifications for high performance oscilloscopes is that they be equipped with delayed sweep. Needless to say, the V-550B possesses delayed sweep, which permits magnification of any desired portion of the wave up to a thousand times.

Variable Hold-off Circuitry Facilitates Pulse Measurement
The trigger hold-off circuitry is a variable hold-off circuitry specially developed for the V-550B, permitting stable triggering on complex waveforms.

Single Sweep
The single sweep mechanism is indispensable for studying signals produced in research involving vibration, impact, explosion, and voice.

10 X Sweep Magnification Facilitates Precision Measurement

Delayed Sweep Jitter Held at Below 1/20,000

SPECIFICATIONS
C.R.T.
Type
Hitachi 150BCB31 rectangular mesh type tube with 10kV acceleration potential and metal backed phosphor.
Screen Type
P31 (GH) phosphor standard.
Useful Screen Area
8 x 10 div (1 div = 1 cm).
Graticule
Internal graticule with centimeter divisions and 2mm subdivisions along the central axis 10% and 90% lines are indicated. Illumination continuously variable.
Z-axis Input
DC-coupled positive-going signal decreases intensity: 5 Vp-p signal causes noticeable modulation at normal intensity: DC to 3.5 MHz.

VERTICAL DEFLECTION (2 Identical Channels)
Bandwidth and Rise Time
DC to at least 50 MHz and rise time 7.0 ns or less. DC to at least 10 MHz and rise time 36 ns or less as magnifier extends. Lower—3dB point, AC coupling 10 HZ or less. 10x probe: 1 Hz or less.
Deflection Factor
5mV/div to 5V/div in 10 calibrated steps, 1-2-5 sequence. Uncalibrated continuous control between steps 1:<2.5. x5 magnifier extends min. deflection rate to 1mV/div.
Accuracy
±3% (+10 to +35°C)
±5% (0 to +50°C)
Additional error for magnifier ±2%
Display Modes
CH1, CH2 (normal or invert) Alternate, chopped (250kHz rate), Added.
Input Impedance
1M ohm ±2% in parallel with 30pF approx.
Maximum Input Voltage
250V (DC + peak AC) or 500Vp-p AC at 1Khz or less.
Delay Line
Permits viewing leading edge of displayed waveform.
3rd Channel Display (A Trigger View)
Display simultaneously channel 1, channel 2, and external trigger signal. The deflection factor is approx. 200mV/div.

TRIGGERING A AND B
A Trigger Modes
Automatic, Normal, Single sweep, TV-V, TV-H.
A Trigger Hold-off
Adjustable control permits a stable presentation of repetitive complex waveform.
A Trigger Source
Internal (Ch1, Ch2), Line, External.
A Trigger Slope
+ or −
A Trigger Sensitivity

	DC to 10MHz	DC to 50MHz
Internal	0.5div	1.5div
External	150mV	500mV

A Trigger Coupling
AC: 30Hz to full bandwidth
HF Rej: 30Hz to 4kHz
LF Rej: 4kHz to 50MHz
DC; 0 to full bandwidth
A External Trigger Input Impedance
1M ohm ±20% in parallel with 30pF approx.
Maximum Input Voltage
250V (DC + peak AC)
500Vp-p AC at 1kHz or less
B Trigger Modes and Source
Automatic, Normal (Internal, External)
B Trigger Slope
+ or −
Trigger Coupling
AC only; 30Hz to full bandwidth

HORIZONTAL DEFLECTION
Time Base A
50ns/div to 0.5s/div in 22 calibrated steps, 1-2-5 sequence. Uncalibrated continuous control between steps 1:<2.5
10x mag extends fastest sweep rate to 5ns/div.
Time Base B
50ns/div to 50ms/div in 19 calibrated steps 1-2-5 sequence. 10x mag extends fastest sweep rate to 5ns/div.
Accuracy
±3% (+10 to +35°C)
±5% (0 to +50°C)
Additional error for magnifier ±2%.
Horizontal Display Modes
A only, A intensified, B delayed.
Calibrated Sweep Delay
Continuous calibrated control between 0.5 and 10x time base A setting.

X-Y OPERATION (CH1: Horiz, Ch2: Vert)
Deflection Factor
Same as vertical deflection
Accuracy
Y: ±3% (+10 to +35°C), ±5% (0 to +50°C)
X: ±5% (+10 to +35°C), ±7% (0 to +50°C)
Additional error for CH1 and CH2 magnifier ±2%
Bandwidth
DC to at least 500kHz
Phase Error
3° or less from DC to 50kHz

CALIBRATOR
0.5v ±1% Frequency 1kHz ±5% square wave

POWER
Line Voltage and Frequencies
108V AC to 132V AC, 49Hz to 61Hz,
114V AC to 120V AC, 49Hz to 400Hz

POWER CONSUMPTION
45W or less at normal line voltage

DIMENSION AND WEIGHT
310(W) x 180(H) x 410(D) mm
(12.2 x 7.1 x 16.1 In.)
9.3kg (20.5 Lb.)

AMBIENT TEMPERATURES
Rated range of use: +10 to +35°C
Limits of operation: 0 to +50°C
Storage and transport: −20 to +70°C

M.T.B.F.
20,000 hours for target value

ACCESSORIES SUPPLIED
Two AT-10AD1.5 probes, 2-A fuse, protective cover, operation manual.


ALSO AVAILABLE: HIT-V100 100 MHz DUAL TRACE OSCILLOSCOPE. CALL FOR PRICING

ORDER TOLL FREE (800) 423-5633

PRIORITY ONE ELECTRONICS

Three good reasons to buy a handheld DMM from Fluke.


MODEL D800A: THE TROUBLESHOOTER

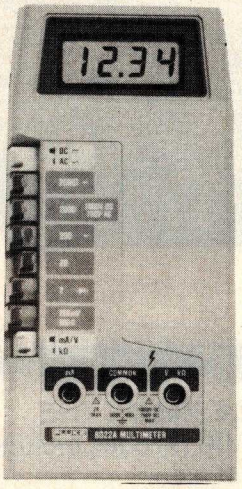

- Six functions
  dc voltage
  ac voltage
  dc current
  ac current
  resistance
  diode test
- 3½-digit resolution
- 0.25% basic dc accuracy
- LCD display
- Overload protection
- Safety-designed test leads
- Full year parts & labor warranty

FLU-D800A **$115.00**


MODEL 802A: THE ANALYST



- Seven functions
  dc voltage
  ac voltage
  dc current
  ac current
  resistance
  diode test
  conductance (1/R)
- 3½-digit resolution
- 0.1% basic dc accuracy
- Overload protection
- Safety-designed test leads
- Two year parts & labor warranty

FLU-D802A **$179.00**

MODEL D804A: THE INVESTIGATOR

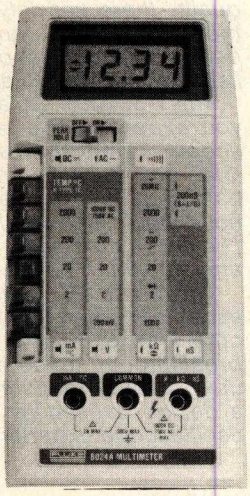

- Nine functions
  dc voltage
  ac voltage
  dc current
  ac current
  resistance
  diode test
  conductance (1/R)
  logic level and continuity detect
  temperature (K-type thermocouple)
- Peak hold on voltage and current functions
- Selectable audible indicator for continuity or level detection
- 3½-digit resolution
- 0.1% basic accuracy
- LCD display
- Overload protection
- Safety designed test leads
- Full year parts & labor warranty

FLU-D804A **$219.00**

More hard facts on Fluke handheld DMM's: One-year specifications.

Accuracies are ± (% of reading + no. of digits) 1 year, 18°C to 28°C except as noted.

AC Current	**D804A**	**D802A**	**D800A**
Ranges	2 mA, 20 mA, 200 mA, 2000 mA		
Resolution	0.05% of range (1 μA on 2 mA range)		
Accuracy			
2 mA range (45Hz-450Hz)	3% of rdg + 2 digits	2% of rdg + 2 digits	2% of rdg + 3 digits
20-2000 mA ranges (45Hz-450Hz)	1.5% of rdg + 2 digits	1.5% of rdg + 2 digits	2% of rdg + 3 digits
(450Hz-1kHz)	1.5% of rdg + 2 digits	1.5% of rdg + 2 digits	Not Specified

Conductance*	**D804A**	**D802A**
Ranges	200 nS	2 mS, 200 nS
Equivalent Resistance Range	5 MΩ to 10,000 MΩ	500Ω to 1 MΩ (2 mS), 5 MΩ to 10,000 MΩ (200 ns)
Resolution	0.05% of range (10^{-10}S on 200 nS range)	
Accuracy	200 nS: 2% of rdg + 10 digits	200 nS: 2% of rdg + 10 digits 2 mS: 0.2% of rdg + 1 digit
Overload Protection	500V dc or rms on all ranges	

Temperature (D804A Only, requires thermocouple accessory)	
Temperature Sensor	K-type Thermocouple (Chromel-Alumel). See accessories
Range	−20°C to +1265°C
Resolution	1°C
Accuracy	±3°C ±1 digit, −20° to +300°C; 3% of rdg, +300°C to +1265°C (±2° ±1 digit, 0° to +80°C typical) Accuracy includes NBS conformity, calibration stability, zero and reference junction but not thermocouple errors.
Connection	Dual banana isothermal termination provided with Fluke thermocouple accessories. Use Y8104 termination accessory for any K-type thermocouple.
Overload Protection	2A fused up to 250V
Continuity (804A Only) Use for Passive Current Testing	
Ranges	All Resistance and Conductance ranges
Indication	Open Circuit: "◂▸" Display Continuity: "▸◂" Display + 2 kHz audio tone (selectable)
Response Time (2 kΩ range)	50 μs (Minimum duration of continuity or open to toggle display or audio tone. Pulse stretcher holds display and tone for approx. 100 ms.)
Overload Protection	500V dc or rms all ranges
Level Detector (804A Only) Use for Active Circuit Testing	
Reference Level	0.8V dc nominal
Display	"▸◂" for inputs greater than reference "▸◂" for inputs less than reference "▸◂" for inputs toggling above and below reference Audio tone coincident with "▸◂" (switch selectable)
Pulse Response (200 kΩ range)	50 μs (Minimum width of 0 to +3V pulse required to toggle display. Pulse stretcher holds display for approx. 100 ms when short pulses are detected.)
Input Impedance	>100 kΩ, <100 pF
Overload Protection	500V dc or rms

Accuracies are ± (% of reading + no. of digits) 1 year, 18°C to 28°C except as noted

DC Voltage	**D804A**	**D802A**	**D800A**
Ranges	200 mV, 2V, 20V, 200V, 1000V		
Resolution	100 μV on 200 mV range		
Accuracy (all ranges)	0.1% rdg + 1 digit	0.1% rdg + 1 digit	0.25% rdg + 1 digit
Input Impedance	10 MΩ on all ranges		
Normal Mode Rejection	>60 dB at 50 and 60 Hz		
Common Mode Rejection	>100 dB at dc, 50, 60 Hz; 1 kΩ unbalance		


AC Voltage	**D804A**	**D802A**	**D800A**
Ranges	200 mV, 2V, 20V, 200V, 750V		
Resolution	100 μV on 200 mV range		
Accuracy	45 Hz to 1 kHz: 0.75% of rdg + 2 digits on all ranges except 750V (1% of rdg + 2 digits) 1 kHz to 2 kHz: 1.5% of rdg + 3 digits on all ranges except 750V (not specified) 2 kHz to 5 kHz: 5% of rdg + 5 digits on all ranges except 200V and 750V (not specified)		45 Hz to 450 Hz: 1% of rdg + 3 digits on all ranges
Input Impedance	10 MΩ, <100 pF on all ranges		

Resistance	**D804A**	**D802A**	**D800A**
Ranges	200Ω, 2 kΩ, 20 kΩ, 2 MΩ, 20MΩ		
Resolution	0.05% of range (0.1Ω on 200Ω range)		
Accuracy			
200 Ω range	0.2% of rdg + 3 digits	0.2% of rdg + 3 digits	0.3% of rdg + 3 digits
2 kΩ thru 200 kΩ ranges	0.1% of rdg + 1 digit	0.1% of rdg + 1 digit	0.2% of rdg + 1 digit
2000 kΩ range	0.15% of rdg + 1 digit	0.1% of rdg + 1 digit	0.2% of rdg + 1 digit
20 MΩ range	2% of rdg + 1 digit	2% of rdg + 1 digit	2% of rdg + 1 digit
Open Circuit Voltage	<1.5V on all ranges except 2 kΩ range <3.5V		
Diode Test (Hi-Lo Ohms)	2 kΩ, 200 kΩ, and 20 MΩ ranges supply enough voltage to turn on junctions allowing a "Diode Test" 200Ω, 20 KΩ, and 2000 kΩ ranges can be made in-circuit measurements without turning on silicon junctions		

DC Current	**D804A**	**D802A**	**D800A**
Ranges	2 mA, 20 mA, 200 mA, 2000 mA		
Resolution	0.05% of range (1 μA on 2 mA range)		
Accuracy	0.75% of rdg + 1 digit all ranges		

WE ACCEPT VISA, and MASTER-CHARGE

LOW COST DMM'S FOR BENCH OR FIELD



FLUKE®

- 3½ LCD display
- Auto zero, auto polarity
- AC or battery operated models
- One year warranty
- Many other features not found in other DMM'S!

FLU-D810 .....$249.00
FLU-D811 with Ni Cad batteries $289.00

LCD DISPLAY

Large, high contrast, 2000 count, liquid crystal display digits can be seen from a distance and in practically any light. An overrange condition is indicated when only the most significant digit is displayed.

TRUE RMS, 50 kHz AND HIGHER

True RMS assures accurate measurements of nonsinusoidal waveforms. You can notice the difference on even the average power line. Any measurement of ac voltage and current may apply to waveforms having a crest factor of 1:1 (squarewaves) to 1.4:1 (sinewaves) to 3:1 (peaked waveforms). A typical 3dB bandwidth to 200 kHz includes the most significant harmonics of fundamental frequencies to 50 kHz. A Fluke-manufactured hybrid rms converter provides wideband, low noise, accurate measurements at low cost.

CONDUCTANCE MEASUREMENTS

This unique and highly useful function makes possible resistance measurements far beyond the capacity of ordinary multimeters. Conductance is the inverse of ohms (1Ω) and is expressed in Siemens, formerly mhos. Simple conversion of direct-reading conductance to ohms yields resistance values to 10,000 MΩ without special shielding to minimize noise. It is a must for verifying resistance values in high voltage dividers, checking leakage of capacitors, pcb's, cables, and insulators, and for general use above 20 MΩ. You may measure transistor beta and leakage directly using a simple test adapter—more useful and informative than simple junction tests. Ask for application bulletin AB-44 for more details.

ONE YEAR ACCURACY SPECIFICATIONS

A very stable semiconductor Band-Gap reference element lets us guarantee accuracy specifications for one year. That means you can depend on accuracy for long periods of time. But it also means a great savings in calibration expense over the life of the DMM. There are only five calibration adjustments. Some will probably never need to be changed.

SPECIFICATIONS

DC VOLTAGE

Ranges: ±200mV, ±2V, ±20V, ±200V, ±1000V.
Resolution: 100 μV on lowest range, 1V on 1000V range.
Accuracy: +(0.1% of reading + 1 digit) on all ranges.
Overload Protection: To 1000V dc or peak ac on any range, continuous.
Imput Impedance: 10MΩ on all ranges.

AC VOLTAGE (TRUE RMS)

Ranges: 200mV, 2V, 200V, 750V.
Resolution: 100 μV on lowest range, 1V on 750V range.
Accuracy: ±(% of reading + no. of digits).

Range	45 Hz	1 kHz	10 kHz	20 Khz	50kHz	200 kHz
200mv 2V 20V	(0.5%+2)	(1.0%+2)	(5%+3)		*	
200V 750V	(0.5%+2)			Not specified		

*Extended Frequency Response is typically ±3dB at 200 kHz. Above accuracy applies for 5% to 100% of voltage range.

Overload Protection: To 750V rms, 1000V peak, not to exceed 10^7 volt-Hertz product, continuous (except 10 seconds maximum on 200mV and 2V ranges).
Input Impedance: 10MΩ in parallel with < 100 pF.
Resistance:

Range	Resolution	Accuracy	Full Scale Voltage	Max Test Current
200Ω	0.1Ω	±(0.2% of rdg+1 digit)	<0.25V	1.30 mA
2kΩ*	1Ω		∞1.00V	1.30 mA
20kΩ	10Ω		<0.25V	10.0 μA
200kΩ*	100Ω		>1.00V	35.0 μA
2000kΩ	1kΩ	±(0.5% of rdg+1 digit)	<0.25V	0.10 μA
20MΩ*	10kΩ		>1.5V	0.35 μA

*Diode test ranges.

LOW POWER OHMS AND DIODE TEST

Three resistance ranges are identified as diode test ranges (→+). They supply enough voltage to turn on a silicon junction so diode and transistor junctions can be tested. The remaining ranges (low power ohms) supply only enough voltage to measure the resistance of in-circuit components other than diodes and transistors.

BATTERY OPTION (—01)

Rechargeable size "C" Ni Cad batteries are installed inside the 8010A or 8012A with this option. They are continually kept charged when the power cord is plugged in and completely recharged in approximately 14 hours. The batteries typically provide up to 40 hours of continuous operation without recharging when measuring dc voltage, up to 15 hours for other measurement functions. The letters "BT" appear in the upper left hand corner of the display about a half hour before the batteries require recharging.

SAFETY AND PROTECTION

Recessed banana jacks reduce shock hazard to an operator. When measuring resistance or conductance, up to 300 volts may be applied with no instrument damage. Transients to 6kV cause no damage when measuring voltage. The standard current input is protected against shorts with a 2A, 250V fuse in series with a 600V fuse. That is double protection—first, for ordinary overloads protected with an ordinary fuse, and, second, for accidental connection to a source of up to 600V ac.

8081A—10 AMPERES AND TRUE RMS

The 8010A will measure 10 amperes of ac or dc current. That is higher than most multimeters, and, because the *true* value of ac current is measured, even complex current waveforms can be measured with accuracy and confidence.

DC Current
Ranges: 200 μA, 2 mA, 20 mA, 200 mA, 2A (and 10A on 8010A).
Resolution: 0.1 μA on lowest range.
Accuracy: ±(0.3% of reading + 1 digit) on all ranges except 10A range on 8010A where accuracy is ±(0.5% of reading + 1 digit).


AC Current (True RMS)
Accuracy: ±(% of reading + no. of digits)

Range	45 Hz	2 kHz	10 kHz	20kHz
200 μA 2 mA 20 mA 200 mA	(1%+2)		(2%+2)	
2000 mA 10A*	(1%+2)		Not specified	

FLUKE DMM ACCESSORIES

FLU-4820S Carrying case (FLU-D810, D811) $35.00
FLU-C90 Carrying case (FLU-D800, D802, D804) .$10.00
FLU-A81 AC adaptor (FLU-D800, D802, D804) ...$15.00
FLU-80J10 10 Amp current shunt $30.00
FLU-Y8133 Deluxe test lead set $15.00
FLU-Y8134 Deluxe test lead set with safety connectors $15.00
FLU-Y8140 Slim test lead set $15.00
FLU-80T150C Temp. probe (°C) $110.00
FLU-80T150F Temp. probe (°F) $110.00
FLU-Y8102 Sheath thermocouple (D804) $50.00
FLU-Y8103 Bead thermocouple (D804) $20.00
FLU-Y8104 Thermocouple termination (D804) $10.00
FLU-Y8008 Touch and hold probe (D810, D811) ...$40.00
FLU-80K40 40KV high voltage probe $75.00
FLU-81RF 100 MHz rf probe $45.00
FLU-82RF 500 MHz rf probe $85.00
FLU-80I600 Clamp-on AC current probe 600A $90.00
FLU-Y8100 200A AC/DC current probe $195.00
FLU-Y8101 150A AC current xformer $69.00

HICKOK
the value innovator



LX 304

- 3½ Digits
- ½" LCD Display
- Floating Decimal Point
- Diode Test Function
- Auto Zero, Auto Polarity
- 100 μV Resolution on DCV
- 200 Hr. Battery Life

SPECIFICATIONS

DC VOLTS	200mV, 2V, 20V, 200V, 1000V
Input Impedance	10MΩ, all ranges
Overload Protection	1000V dc/peak ac, except 500V on 200mV range
RESISTANCE	200Ω, 2kΩ, 20kΩ, 200kΩ, 2MΩ, 20MΩ
Resolution	0.1Ω on 200Ω range
Accuracy	±0.9% + 1 digit except ±1.4% + 1 digit on 20MΩ range
Overload Protection	120V dc or rms ac, all ranges, indefinitely 240V dc or rms ac, all ranges, 30 seconds
AC VOLTS	200V, 600V, Avg. sensing—rms calibrated sine wave
Accuracy	±1.0% + 4 digits, 40 Hz to 120 Hz -0.2 dB @ 1 kHz, -2.0 dB @ 5kHz
Input Impedance	4.3MΩ, all ranges
Overload Protection	600V dc or ac rms, all ranges
DC CURRENT	200mA, 1A
Resolution	0.1mA
Accuracy	±1.5% + 1 digit, all ranges except ±2.5% + 1 digit on 200mA range of LX 303
Overload Protection	1.7A all ranges
GENERAL	
Power	Single 9V battery; NEDA 1604 (not incl.) or Hickok AC Adapter
Battery Indicator	"Lo Bat" on display
Dimensions	5⅞" x 3⅜" x 1¾" (14.7 cm x 8.5 cm x 4.3 cm)
Weight	12 oz. (0.33 kg) including battery

HIC-LX304 .....$89.95

ACCESSORIES (See LX 303)



HICKOK

$79.95
LX303

- 3½ Digits
- ½" LCD Display
- 200 Hour Battery Life
- Auto Zero, Polarity and Overage
- 100mv DC F.C. Sensitivity
- 19 Ranges and Functions
- Weighs on 12 ounces

Specifications: DC Volts (5 Ranges): 0.1mV to 1000V; Accuracy +0.5% rdg +0.5% f.s.; Input imped: 10M ohms; Max. input 1kV except 500V on 200mV range. **AC VOLTS (40Hz to 5kHz):** 0.1 to 600 V; Accuracy: +1.0% rdg +0.5% f.s. (−2dB max. at 5kHz); Max input:600V. **RESISTANCE (6 LOW POWER RANGES):** 0.1 ohms to 20M ohms; Accuracy: +0.5% rdg +0.5% f.s. (+1.5% rdg on 20M ohms range); input protected to 120 VAC all ranges. **DC CURRENT (6 RANGES):** .01nA to 100mA; Accuracy: +1.0% rdg +0.5% f.s. **DIMENSIONS AND WEIGHT:** 5-7/8" x 3-3/8 x 1¾", 12 oz.; Power: 9V Batt. (not included) or Hickok AC adapter; READ RATE: 3/sec. OPERATING TEMPERATURE: 0°-50° C.

PART NO.	DESCRIPTION	PRICE
HIC-LX303	DIGITAL MULTIMETER	$79.95
HIC-RC-3	115V AC ADAPTER	$ 8.00
HIC-CC-3	PADDED CARRY CASE	$ 8.00
HIC-VP-10	X10 DC PROBE ADAPTER (Up to 10KV)	$16.50
HIC-VP40	40kV DC PROBE	$38.50
HIC-CS-1	10 Amp DC Current Shunt	$16.50
HIC-TP-20F	Temp Probe (-67 to + 302F)	$49.95
HIC-TP-20C	Temp Probe (-55 to + 150C)	$49.95


Non-Linear Systems OSCILLOSCOPES

NEW MS-230 Dual Trace Miniscope with 30 MHz Bandwidth!

From the originators of the Digital Voltmeter, the people who have broken sales and performance records for Oscilloscopes, Non-Linear Systems, comes the MS-230 miniscope.

Non-Linear Systems took their engineering and modular construction skills and made a dream a reality, a Dual-Trace 30 MHz miniscope, small enough to fit in most briefcases with room to spare at an affordable price.

FEATURES: • Dual-Trace — 2-channel; separate, chopped or alternate modes. • Warranty — one year parts and labor. • 30-megahertz bandwidth. • External and internal trigger. • Time Base — 0.05 microseconds to 0.2 Sec./div — 21 settings. • Battery or line operation. • Line synchronization mode. • Power consumption less than 50W. • Vertical Gain — 0.01 to 50 volts/div — 12 settings. • Size: 2.9" H x 6.4" W x 8.5" D. • Weighs only 3.5 lbs. with batteries. • TEST MOST DIGITAL LOGIC CIRCUITS INCLUDING MICROPROCESSORS.

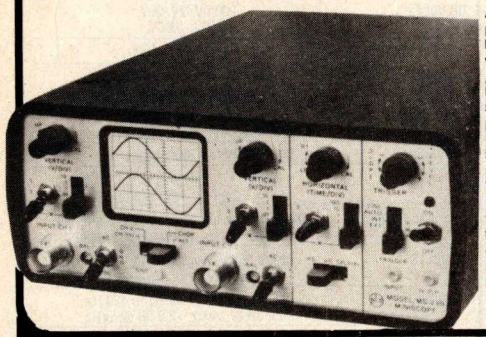

VERTICLE: Mode: *CH1, CH2, CH1 & CH2 (Chopped) & CH2 (Alt.) (The following specifications apply to each channel.)* **Bandwidth:** DC to 30 MHz, ±3 db @ 3 division deflection. Typical 4 division deflection is obtainbable up to 20 MHz. **Coupling:** AC, DC or ground, switch selectable. Low frequency 3 db point on AC is 3 Hz. **Rise Time:** Approximately 10 nSec @ 3 division deflection. **Vertical Input:** 10 mV/div to 50 V/div in 12 calibrated ranges. Accuracy is 3%. **Input Impedance:** 1 megohm in parallel with 50 pF.

HORIZONTAL: Mode: Internal time base or external, in XY mode, vertical input is thru CH1 and horizontal thru CH2. **Time Base:** 0.1 μsec/div to 0.5 sec/div in 21 calibrated ranges; 3% accuracy. **Bandwidth:** DC to 1 MHz (±3 db). **Deflection factor:** 10 mV/div to 50 V/div in 12 calibrated ranges. **Max. Input Voltage:** 250 V (DC and peak AC). **Trigger Modes:** Automatic, internal, external, and line (line not functional when operating on battery power). **Slope Switch:** + *or* −. **Coupling:** AC. **Sensitivity:** Less than 1 div for interanl trigger and less than 1 volt for external trigger. **CRT Viewing Area (Screen Size):** 1.1" H x 1.35" W. **Graticule:** 0.25 in./div (4 div H x 5 div W). **Power:** 3 rechargable batteries or 115 VAC with transformer. **Battery Life:** Approx. 45 minutes. **Power Consumption:** Less than 50 watts. **Input Connector:** BNC; two shielded cables included. **Size:** 2.9" H x 6.4" W x 8.5" D. **Weight:** 3.5 lbs. with batteries.


NLS MS-230 Miniscope ..... **List Price $598.15**

Our Price $525.00

MS-215 MINISCOPE OSCILLOSCOPE

An extremely small dual-trace oscilloscope with big performance at a low price. Portable, battery powered or AC line operation. Rechargeable batteries and charger included.

FEATURES: • Dual trace — 2 channel; separate, chopped, or alternate modes. • 15 MHz bandwidth. • External and internal trigger. • Battery or line operation. • Automatic or line sync. modes. • Power consumption less than 15 watts. • **Time Base:** 0.1 μsec to 0.5 sec/div in 21 settings. • **Vertical Gain:** 0.01 to 50 volts/div in 12 settings. • Weighs only 3 lbs. with batteries.

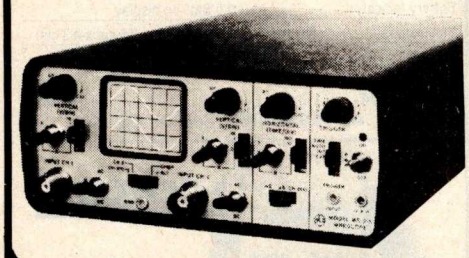

SPECIFICATIONS: Vertical (Both channels identical). **Mode:** CH1, CH2, CH1 and CH2 (chopped), and CH1 and CH2 (alternate). **Bandwidth:** DC to 15 MHz, ±6 db at 1 div deflection.* **Risetime:** Approx. 23 nsec at 1 div deflection. **Deflection Factor:** 10 mV/div to 50 V/div in 12 calibrated ranges; 3% accuracy. **Max. Input Voltage:** 350 V (DC and peak AC) provided DC component does not exceed 250 V. **Horizontal Mode:** Internal time base or external. In XY mode, vertical input is thru CH1 and horizontal thru CH2. **Time Base:** 0.1 μsec/div to 0.5 sec/div in 21 calibrated ranges; 3% accuracy. **Bandwidth:** DC to 200 kHz (±3 db). **Deflection Factor:** 10 mV/div to 50 V/div in 12 calibrated ranges. **Max. Input Voltage:** 250 V (DC and peak AC). **Trigger: Modes:** Automatic, internal, external, and line (line not functional when operating on battery power). **Slope Switch:** + *or* −. **Coupling:** AC. **Sensitivity:** Less than 1 div for internal trigger and less than 1 volt for external trigger. **CRT Viewing Area (Screen Size):** 1.1" H x 1.35" W. **Graticlue:** 0.25 in./div (4 div H x 5 div W). **Power Consumption:** Less than 15 watts. **Power Required:** AC line or rechargeable batteries. **Battery Life:** 3 hours typical. **Input Connector:** BNC; two shielded cables included. **Size:** 2.9" H x 6.4" W x 8.0" D. **Weight:** 3 lbs.

NLS-MS-215 Miniscope ..... **List Price $465.45**

Our Price $410.00

* Typical 3 dB point is 8 MHz at 2-division deflection. Typical maximum frequency for full scale (4-div) deflection is 2 MHz.

MS-15 MINISCOPE OSCILLOSCOPE

An extremely small oscilloscope with big performance at a low price. Portable, battery operated, or AC line operation. Rechargeable batteries and charger unit included. 1.1" x 1.35" viewing area.

FEATURES: • 15 MHz bandwidth. • External or internal triggering. • Time Base—0.1μsec. to 0.5 sec./div. in 21 settings. • Battery or line operation. • Automatic and line sync modes. • Power consumption less than 15 watts. • Vertical Gain—0.01 to 50 volts/div. in 12 settings. • Weight—only 3 lbs.



SPECIFICATIONS: Vertical Bandwidth: 15 MHz ± 6 dB at 1 div. deflection*. **Risetime:** Approx. 23nsec. at 1 div. deflection. **Deflection Factor:** 10 mV/div. to 50 V/div. in 12 calibrated ranges; 3% accuracy . **Max. Input Voltage:** 350 V (DC + peak AC) provided DC component does not exceed 250 V. **Horizontal Mode:** Internal time base or external. **Time Base:** 0.1 μsec to 0.5 sec/div. in 21 calibrated ranges; 3% accuracy. **Horizontal Bandwidth:** DC to 200 kHz (±3 dB). **Deflection Factor:** Approx. 1V/div. **Max. Input Voltage:** 100 V (DC + peak AC). **Trigger Modes:** Automatic, internal, external and line (line does not function when operating on battery power). **Slope Switch:** + *or* −. **Coupling:** DC. **Sensitivity:** Less than 1 div. for internal trigger; less than 1 volt for external trigger. **CRT Viewing Area (Screen Size):** 1.1" h. x 1.35" w. **Graticule:** 0.25 in./div. (4 div. h. x 5 div. w.). **Power Consumption:** Less than 15 watts. **Power Required:** AC line or rechargeable batteries. **Battery Life:** 3 hours typical. **Input Connector:** BNC; two cables included. **Size:** 2.9" h. x 6.4" w. x 8.0" d. **Weight:** 3 lbs. with batteries

NLS-MS-15 Miniscope ..... **List Price $349.80**

Our Price $310.00

* Typical 3 dB point is 8 MHz at 2-division deflection. Typical maximum frequency for full scale (4-div) deflection is 2 MHz.

ACCESSORIES: PROBES

Deluxe 10 to 1 probe with 10 megohm input. 100 HHz probe with 4 interchangeable tips: Spring-loaded retractable cover tip, insulating tip, BNC tip, IC tip, also included cap adjustment tool and zippered vinyl case.

NLS-41-141 ..... **$27.00**

DELUXE COMBINATION PROBE

Same as above except the probe has a switch to select; 10 to 1, 1 to 1 or a ground reference position.


BKP-PR37RD Red probe body
BKP-PR37GY Grey probe body ..... **$39.50 ea.**

LEATHER CARRYING CASE

The leather case has 2 separate compartments. One to hold the scope, the other to hold the charger, probe, shoulder strap, etc. The case can be worn on the belt, or over the neck. The snaps used on the case are "one way", thus accidental striking of the case against an object will not undo the snaps or let it be pulled off your belt.

NLS-41-180 - Leather Case (MS-230) **$45.00**
NLS-41-140 - Leather Case (MS-15 & MS-215) **$45.00**
NLS-41-134-2 - Charger Unit, 230 VAC (MS-15 & MS-215) **$7.70**
NLS-41-184-2 - Charger Unit, 230 VAC (MS-230) **$20.90**

15 MHz dual-trace Model 1420 AC/DC/battery mini-scope



- 15 MHz response; usable beyond 20 MHz
- 10 mV/div vertical sensitivity
- Conveniently fits into ordinary attache case — only 11 x 22 x 30 cm (4.5 x 8.5 x 12") with handle
- Operates on AC, external 10-16 VDC or optional internal battery pack
- 8 x 10 division high-brightness rectangular CRT
- TIME/DIV control selects line/frame rate triggering
- 18 calibrated sweep positions
- Video sync separator standard
- X-Y operation — X axis, through CH.B
- Front-panel probe calibration source
- Weighs only 3.6 kg. (8 lbs.)

B&K PRECISION

SPECIFICATIONS

VERTICAL AMPLIFIER: Deflection Factor: 10 mV/div to 20 V/div, ±5% in 11 ranges, each with vernier adjustment. **Frequency Response: DC:** −15 MHz (−3 dB); **AC:** −10 Hz-15 MHz (−3 dB). **Rise Time:** 24 nsec or less. **Overshoot:** 3% or less. **Input Impedance:** 1 MΩ shunted by 22 pF. **Maximum Input:** 300 V (DC + AC) peak or 600 V p-p. **Operating Modes:** Channel A only; Channel B only; A & B (dual). **Dual-Trace:** Trace automatically chopped at all sweep rates less than or equal to 1 mSEC/div and alternate mode for all sweep rates greater than 1 mSEC/div. **Chop Frequency:** 100 kHz ±20%. **Channel Separation:** Better than 60 dB at 1 kHz.

SWEEP SYSTEM: (Common to Channel A and Channel B). **Type:** Automatic and triggered (NORM); auto provides sweep with no input signal. **Sweep Time:** 1.0 μS/div to 0.5 S/div ±5% in 18 ranges in a 1-2-5 sequence. **Linearity:** 3%; 10X ±5%. **Sweep Magnification:** x10, ±10%, variable between ranges. Extends maximum sweep rate to 100 nS/div.

TRIGGERING: Source: CH A, CH B, (CH A in dual) external. **Automatic:** Sweep obtained without input signal. **Normal:** Sweep is obtained with a displayed signal of one division or more. **Slope:** Sweep can be set to trigger on the positive- or negative-going slope of the trigger waveform. **Coupling:** AC, 20 Hz-20 MHz. **Level:** Continuously variable. **Trigger Sensitivity:** INT: 20 Hz to 15 MHz — 1 Div deflection. EXT: 20 Hz to 15 MHz — 1.0 V p-p. **External Trigger Input:** Max. Input Voltage: 50 V p-p or 24 V. DC + AC peak. **Input Impedance:** 100 KΩ (nominal). Input Capacitance: 35 pF (nominal).

HORIZONTAL AMPLIFIER: Input through Channel B vertical input. **Deflection Factor:** 10 mV/div, to 20 V/div, ±5% in 11 ranges, each with fine adjustment. **Response: DC:** DC to 1 MHz (−3 dB); **AC:** 10 Hz to 1 MHz. **Input Impedance:** 1 MΩ (±5%), 22 pF (±3pF). **Input Protection:** 300 V (DC + AC peak) or 600 V p-p. **X-Y Operation:** With SWEEP TIME/DIV switch in X-Y position, the CH B input becomes the X input (horizontal) and the CH B position control becomes horizontal position control.

OTHER SPECIFICATIONS:


Operating Environment — Temp.: 0 to +45°C. **Calibration:** Internal 1 V p-p ±3% (square wave at 1 kHz ±5%). **CRT:** Rectangular, 8 x 10 div (0.5 cm/div) with P31 phosphor; mumetal shield. **Power Requirements:** 120 VAC-60 Hz, 240 VAC-50 Hz, 10-16 VDC or internal battery. Power consumption: 16 watts (AC). Supplied with 120 VAC adapter. 240 VAC adapter available on special order. **Size:** (HWD) 11 x 22 x 30 cm (4.5 x 8.5 x 12") with handle. 8 x 20 x 25 cm (3.25 x 7.75 x 10") without handle. **Weight:** 3.6 kg (8 lbs.) with optional battery. **Probes:** Two 10:1/direct probes and accessory tips provided. **Options:** BP-14 battery pack, LC-20 deluxe carrying case with shoulder strap and pocket, LC-21 pouch for probes and operating manual.

		LIST PRICE	OUR PRICE
BKP-1420	Miniscope	$825.00	$750.00
BKP-BP14	Battery Pack		$ 55.00
BKP-LC20	Leathercase		CALL
BKP-LC21	Pouch for Probes		CALL

3" 5 MHz Solid State Oscilloscope

$289.00

B&K-PRECISION Model BKP-1405



FEATURES: 5MHz with high sensitivity • Direct deflection input for waveforms to 450MHz • Sharp bright trace • DC amplifiers on both axes • 10mV/div vertical sensitivity • Weighs only 8.5 lbs.

The 1403A is an outstanding value. Bandwidth extends to 5MHz with a sensitivity of 10mV/div or better. With high brightness CRT and smoked-glass filter, waveforms are clear and easy to observe. The graticule features db and division indexing.

SPECIFICATIONS: Vertical Amplifier—Sensitivity: 10mV/div or better. Response: DC, DC-5MHz (−3dB); AC, 2Hz-5MHz (−3dB). Max Input: 600V peak to peak. **Input Impedance:** 1 meg shunted by 35pF. Attenuattor: 1, 1/10, 1/100 multiplier, ±5%. Gain Control Range: greater than 22dB. **Horizontal Amplifier—**Sensitivity: 300mV/division or better. Response: DC-250kHz. Max Input: 100 Vp-p. **Sweep System—**Type: Recurrent. Time Base Ranges: 10-100Hz, 100-1000Hz, 1-10kHz, 10-100kHz; continuously variable between ranges. Sweep Linearity: ±5%. Sync: Internal, negative; external. **Direct Deflection Terminals:** 10V/division sensitivity or better. **General—**Intensity Modulation: 25Vp-p. **Power:** 117/234VAC, 50-60Hz, 10W; three-wire grounded line cord. **Acc.incl.:** Leads, spare fuse, instructions. **Size:** (HWD) 13.1 x 18 x 29 cm (5.25 x 7.25 x 11.5"). **Weight:** 3.8 kg. (8.5 lbs.). Optional Accessories: PR-21 probe. LC-14 case.

WE ACCEPT VISA, and MASTER-CHARGE

Non-Linear Systems DIGITAL PANEL METERS DIGITAL MULTIMETERS Counters

MODEL PC-4 PANEL METER EVENT COUNTER



PC-4

The PC-4 is an all-solid-state event counter or totalizer designed for panel mounting and high reliability. It will totalize electronic pulses up to 200,000 per second or mechanical switch closures up to 3000 per second. The .3" high LED display is easily readable up to eight feet. Has multiplexed BCD output and a displayhold feature. **Input Signal Amplitude:** + 3 to + 15 volts or switch open to ground for count. **Decimal Location:** external jumper locates decimal to any of four positions. **Outputs:** 1-2-4-8 BCD parallel. **Power Source:** + 5 VDC, ± 5%, external. **Size:** 0.9375" h. x 2.5" w. x 3.25 d. **Weight:** 4 oz.

NLS PC-4 Event Counter—Price Each **$64.20**

MODEL RC-5TB UNIVERSAL COUNTER



A DIN size panel-mounted universal counter which can be internally programmed to function as a unit counter, frequency counter. The RC-5TB also permits internal selection of four time bases of 0.01 sec., 0.1 sec., 1.0 sec., or 10 sec. for the frequency counter mode and 1 cycle, 10 cycles, or 1000 cycles for the period frequency ratio and time interval modes. The RC-5TB utilizes terminal block connections and has hold and reset capabilities. **Power Requirements:** + 5 VDC, ± 5%. **Operating Temperature Range:** 0° C to + 50° C. **Accuracy:** Unit counter frequency counter, ± 1 count; frequency ratio/period/time interval, ± 1 count + time base accuracy. **Number of Digits:** 5. **Display:** 0.5" high LED. **Count Rate:** Greater than 1 MHz. **Input signal Amplitude:** + 3 to + 15 volts. **Time Base Crystal Frequency:** 10 MHz. **Frequency:** DC to 1 MHz. **Size:** Behind bezel, 3.58" w. x 1.645" h. x 3.80" d.

NLS RC-5TB "niversal Counter - Net each **$144.00**

MODELS PR-5 AND PR-5B DIGITAL PRESET COUNTERS



PR-5

Low-cost electronic digital preset counters to replace mechanical counters. Solid-state LSI design. Up to 500 kHz pulse count rate or 300 contact closures per second. Accepts subtractive pulses for rejection subtraction or for counting downward. Multiplexed BCD output. Guarded preset; can not be accidently changed. Unlimited number of preset count. Applicable to totalizing batch counting, digitizing, timing rate/frequency measurement, press control, coil winding and many other applications. 5-digit, 0.3" high LED display indicates total number of counts less any subtractive counts. Compatible with wide range of sensors. **Count Speed:** Electronic, up to 500 kHz (+ 3 V to + 15 V); contact closure, up to 300/sec. **Number of Resets:** One, built-in; unlimited number with external switches; preset number set by front-panel screwdriver adjustments. **Input Impedance:** 40K ohms. **Reset Capability:** Front-panel pushbutton switch or external contact closure. **Power Requirements:** + 12 VDC (± 5%), 270 mA max.; Model PR-5B contains internal rechargeable battery pack which provides + 12 V stand-by power (without loss of count) for approximately 1 hr. in case of primary power failure. An optional 115 VAC line power supply for operation of Model PR-5 or recharging batteries of PR-5B is available as an accessory. **Operating Temperature:** 0° C to 50° C. **Coincidence Output:** Output signal is provided when displayed count is equal to preset number (TTL logic level) or when zero is reached when counting downward. **Size:** 2.25" h. x 3.25" w. x 4" d. **Weight:** 4.75 oz.


NLS PR-5 Digital Preset Counter—Net Each **$168.55**

NLS PR-5B Counter w/Battery Pfck—
Net Each **$198.55**

RANGE INFORMATION

	RANGE	CODE
WHEN ORDERING PANEL METERS	0-200V	A
FROM THIS PAGE, A VOLTAGE RANGE	0-200V	B
MAY BE REQUIRED IN THE PART	0-20V	C
NUMBER. PLEASE USE THE CODES	0-2V	D
GIVEN.	0-.2V	E

3½ DIGIT PM SERIES THRIFTMETER DIGITAL PANEL METERS

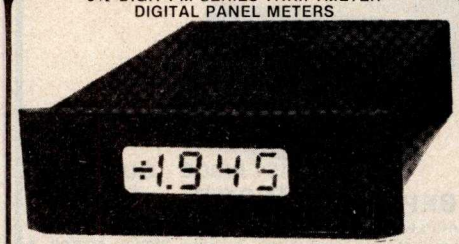

Great performance at a thrifty price. 3½ digits; 3 digits plus 100% overrange. 0.05% accuracy.

FEATURES: • MOS/LSI construction. • Less than 1" high. • Programmable decimal. • No zero adjustment necessary. • Overload indication. • Large, bright, 0.3" LED or LCD display. • Low Power requirement. • Display blanking. • Automatic polarity. • Input voltage protection.

SPECIFICATIONS: Voltage Ranges: 0 – ± 0.1999, 0 – ± 1,999, 0 – + 19.99, 0 – ± 199.9, and 0 – 1000 VDC. **Accuracy (at + 23° C ± 2° C):** ± 0.05% of reading + 0.05% of full scale. **Input Impedance:** 0.1999 volt range, 100 megohms; 1.999 volt range, 1000 megohms; 19.99 volt range, 1 megohm; 199.9 and 1000 volt ranges, 10 megohms. **Display Height:** 0.3" **Display Type:** PM-349 and PM-350, LED: PM-351, LCD. **Update Rate:** 3 rdg./sec. nominal **Power Requirements;** 5 VDC (± 5%), 200 mA, nominal for PM-349 and PM-350; 6mA for PM-351. **Common Mode Rejection:** 80 dB, minimum. **Common Mode Compliance:** + 100 mV. **Operating Temperature:** 10° C to 50° C. **Zero Adjustment:** None required. **Decimal Positioning Capability:** Standard. **Control Signals: Polarity Inhibit:** Standard. **Display Inhibit:** Standard. **Scale Factor Adjustment:** ± 5%. **Input Voltage Protection:** Standard. **Overload Indication:** Standard. **Bipolar Operation:** Standard. **Automatic Polarity:** Standard. **Special Scaling:** Optional. **Offset Capability:** Optional **Current Meter Operation:** Optional. **Overall Size:** 2-7/8" w. x 15/16" h. x 3¼" d.

with Soldered in components
NLS-PM349-RANGE **$55.65**
Range change resistors, Display and IC's are plug in
NLS-PM350-RANGE **$69.55**
NLS-PM351-RANGE **$78.10**

RANGE: .2V (PM350, PM351 Only), 2V, 20V, 200V, 1000V.
Specify when ordering.

4½ DIGIT PM SERIES DIGITAL PANEL METER

SPECIFICATIONS: Voltage Ranges: 0 – ± 1.999, 0 – 19.999, 0 – ± 199.99, 0 – ± 1000VDC. **Accuracy (at**
NLS-PM450-RANGE **$122.00**

4½ DIGIT RM SERIES DIGITAL PANEL METERS



RM-450

SPECIFICATIONS: Voltage Ranges: 0 – ± 1.9999, 0 – 19.999, 0 – ± 199.99, 0 – ± 1000 volts. **Accuracy (at 23° C ± 2°):** 0.02% of full scale. **Input Impedance:** 1.9999 volt range, 1000 megohms; 19.999 volt range, 1 megohm; 199.99 and 1000 volt ranges, 10 megohms. **Display Height:** RM-450, 0.5"; RM-451, 0.4". **Display Type:** RM-450, LED: RM-451, LCD.

NLS-RMS450-RANGE	**(LED DISPLAY)**	**$133.00**
NLS-RM450TB-RANGE	**(LED DISPLAY)**	**$133.00**
NLS-RM451-RANGE	**(LCD DISPLAY)**	**$146.60**
NLS-RM450TB-RANGE	**(LCD DISPLAY)**	**$146.60**


RANGE: 2V, 20V, 200V, 1000V.
Specify when ordering.

3½ DIGIT RM SERIES DIGITAL METERS

SPECIFICATIONS: Voltage Ranges: 0 – ± . 1999, 0 – ± 1.999, 0 – ± *19.99, 0* – ± 199.9, and 0 – ± 1000 VDC/VAC. **Accuracy** (at 23° C ± 2° C): ± (0.05% of reading + 0.05% of full scale). **Input Impedance:** 0.199 volt range. 100 megohms; 1.999 volt range, 1000 meghohms; 19.99 volt range, 1 megohm; 199.9 and 1000 volt ranges, 10 megohms. **Display Height:** 0.5" LED: 0.6" LCD. **Display Type:** RM-350 or RM-350TB, LED: RM-351 or RM-351TB, LCD. **Update Rate:** 3 readings/second. **Common Mode Rejection:** 80 db minimum. **Common Mode Compliance:** + 100 mV. **Operating Temperature:** 10° C to 50° C. **Zero Adjustment:** None required. **Size:** 1.89" h. x 4.0" w. x 3.8" d.

NLS-RM350-RANGE	**(LED DISPLAY)**	**$69.55**
NLS-RM350TB-RANGE	**(LED DISPLAY)**	**$69.55**
NLS-RM351-RANGE	**(LCD DISPLAY)**	**$81.30**
NLS-RM350TB-RANGE	**(LCD DISPLAY)**	**$81.30**

RANGE: .2V, 2V, 20V, 200V, 1000V.
Specify when ordering.



THE NEW TECHNOLOGY TOUCH/TEST 20 MULTIMETER

Voltage Measurements. AC volts & AC millivolts — each function has three ranges; measurements from 10 microvolts to 750 VRMS. DC volts & DC millivolts — each function has three ranges; measurements from 10 microvolts to 1000 VDC.

Temperature Measurements. Degrees Celsius & Fahrenheit — two ranges; measurements from –40° to +150°C or from –40° to +302°F.

Conductance Measurements. Measurements from 0.01 nanosiemens to 1.999 nanosiemens which is equivalent to: from 5 megohms to 100,000 megohms.

Capacitance Measurements. Microfarads, nanofarads & picofarads — six ranges combined; measurements from 1.0 picofarad to 200 microfarads.

Current Measurements. AC amperes & AC milliamperes — four ranges; measurements from 10 microamperes to 10 amperes. DC amperes, DC milliamperes & DC microamperes — seven ranges combined; measurements from 0.01 microamperes to 10 amperes.

Resistance Measurements. Megohms, kilohms & ohms — seven ranges combined; measurements from 10 milliohms to 20 megohms.

Other Tests. Diode Test — A single quantitative means of checking diode and transistor junctions in both conducting and non-conducting directions. Continuity Test — Provides capability for audibly checking conductors and solder joints for shorts and open circuits, plus a go-no-go measurement of the amount of resistance from 10 milliohms to 2000 ohms.

ACCURACY SPECIFICATIONS

DC Voltage — DC volts & DC Millivolts
±(0.2% of Reading + 1 digit)

AC Voltage — AC volts & AC millivolts
±(0.5% of Reading + 2 digits) — 50 Hz to 10 kHz

DC Current — DC amps, DC milliamps & DC microamps
±(1% of Reading + 1 digit)

AC Current — AC amps & AC milliamps
±(1.5% of Reading + 2 digits) — 50 Hz to 10 kHz

Temperature — °C & °F
±(3°C from -40°C to +150°C)

Resistance — ohms, kilohms & megohms
±(0.25% of Reading + 1 digit)
Test Current — 100 nA, 10 μA & 1 mA
Test Voltage — 0.2V max. @ F.S. up to 2 megohms

Conductance — nanosiemens
±(0.2% of Reading + 2 digits)

Capacitance — microfarad, nanofarad & picofarad
±(1% of full scale)

Diode Test
±(0.2% of Reading + 1 digit)
Test Current — 1 mA ±2%

TOUCH/TEST 20 comes complete with Test Leads, Temperature Probe, and Component Test Adaptor.

CAT. PART #	LIST PRICE	OUR PRICE
NLS-TT20	**$399.50**	**$360.00**
NLS-TT20B	**$425.00**	**$385.00**
(With Batteries and Charger Unit)		
NLS-41-140	Leather Carrying Case	**$45.00**



FM-300TB/115 and FM-300TB/230
LCD Display — 45.0 to 99.9 Hz.

3DIGIT FM SERIES DIGITAL LINE FREQUENCY MONITORS

FEATURES: • Crystal controlled time base. • Fits DIN or NEMA cutout. • Large 0.6" LCD or 0.5" LED. • Calibration not required. • Line voltage protection. • Display updated every two seconds. • Terminal block connections.

SPECIFICATIONS: Frequency Range: FM-3TB and FM-300TB, 45.0 to 99.9 Hz; FM-340TB, 045 to 450 Hz. **Time Base:** 1 second, crystal controlled. **Resolution:** FM-3TB and FM-300TB, 0.1 Hz; FM-340TB, 1 Hz. **Accuracy:** FM-3TB and FM300TB, ± 0.1 Hz; FM-340TB, ± 1 Hz. **Display:** FM-3TB, 0.5" LED: FM-300TB, 0.6" LCD: FM-340TB, 0.6"LCD. **Update Rate:** Once every two seconds **Operating Temperature:** 0° C to + 50° C. **Size:** 1.89" h. x 4.00" x 3.80" d.

NLS-FM3TB-115VAC	**$103.55**
NLS-FM3TB-230VAC	**$105.55**
NLS-FM300TB-115VAC	**$109.15**
NLS-FM300TB-230VAC	**$112.35**
NLS-FM340TB-115VAC	**$112.00**
NLS-FM340TB-230VAC	**$115.00**

WE ACCEPT VISA, and MASTER-CHARGE

B+K PRECISION DYNASCAN CORPORATION

Test Equipment

New Sweep/Function Generator.....



	LIST PRICE	OUR PRICE
BKP-3020	$350.00	$309.00

...Four Instruments in One!

decoders...Generate double side-band supressed carrier signals for communications system tests...Evaluate attack-time of audio compressors...Sweeptest any passive or active device up to 2MHz.

FEATURES: Four instruments in one package — sweep generator, function generator, pulse generator, tone-burst generator • Covers .02Hz-2MHz • 1000: 1 tuning range • Low-distortion high-accuracy outputs • Three-step attenuator plus vernier control • Internal linear and log sweeps • Tone-burst output is front-panel or externally programmable • Variable symmetry for almost any wave shape • Independent control of modulation and carrier level • Most complete low frequency signal source in its price range.

APPLICATIONS: Frequency response tests ... Amplifier square-wave and sweep evaluation ... Tone-burst speaker response tests ... Bias signal source ... substitute signal source for digital and analog circuits ... Pulse signal source ... Check threshold levels for TTL and CMOS logic ... Receiver alignment ... IF response tests... Observe distortion including Transient Intermodulation (TIM) distortion ... Measure linearity of instruments and transducers ... Check for ringing inductors ... Align subaudible and tone-burst.

SPECIFICATIONS: Frequency—Range: .02Hz-2MHz in 7 ranges. (each range provides 1000: 1 frequency control.) **Ext. Control:** VCG range >1000: 1 (linear) on any range with 0-10V input. **Accuracy:** ±5% of f.s. **Stability:** .05% (after 15 min.) **SQUARE WAVE:** Variable amplitude and fixed TTL output. **Symmetry:** 99% to 100kHz. **Rise/Fall Time:** <100ns. **TTL Square Wave:** <25ns. rise/fall time (logic 0<0.4V; logic 1>2.4V). **SINE WAVE—Distortion:** <1% .02Hz to 100kHz, <0.5% typical. **Amplitude Flatness:** Better than ±0.3dB to 2MHz at max. output. **TRIANGLE WAVE—Linearity:** 99% at 100kHz. **Variable Symmetry:** 40:1 range, .02Hz-2MHz. **AM Modulation:** 0-1.5Vp-p ext. signal required to provide 100% modulation. Capable of suppressed carrier operation. **SWEEP—Internal:** Linear or log. **Sweep Rate:** 0.5Hz to 50Hz. **Sweep Width:** Var. 10:1 to 1000:1. **Sweep V. Output:** Proportional to sweep. **Ext. Sweep:** Rear panel VCG input provided. **TONE-BURST—Burst Width:** Adj. from 5-90% of period of internal gating frequency. Ext. gating, burst width determined by TTL gating pulse. **Rep. Rate:** 0.5Hz to 50Hz, set by SWEEP RATE control. **OUTPUT—Amplitude:** 20Vp-p open circuit; 10Vp-p at 50Ω. **Control:** Cont. variable, >20dB. Fixed attenuation, 0-40dB in 3 steps; total 60dB attenuation. **Output Z:** 50Ω ±5%. **DC Offset:** Cont. variable. 0 to ± 10V or ± 5V into 50Ω.

GENERAL—Rear panel jacks: VCG (sweep) input, GCV voltage out (prop. to freq.), AM input, TTL output, ext. burst gate input. **Operating Temp.:** 0-50°C. **Power:** 105-130VAC, 60Hz, 22W. Three-wire cord. **Size (HWD):** 8.1 x 29 x 20cm. (3.2 x 11.3 x 7.8") incl. handle. **Weight:** 1.35kg (3.1 lbs.) CSA listed.

New Low Distortion Function Generator




	LIST PRICE	OUR PRICE
BKP-3010	$200.00	$175.00

APPLICATIONS: Frequency response tests • Amplifier performance evaluation • Bias signal source • Analog/Digital signal substitution • Receiver alignment • Check linearity of test instruments • Check resonant circuits for ringing inductors.

FEATURES: Generates sine, square and triangle waveforms • Variable amplitude and fixed TTL square-wave outputs • 0.1 Hz to 1 MHz in six ranges • Typical sine wave distortion under 0.5% from 0.1 Hz to 100 kHz • Variable DC offset for engineering applications • VCO external input for sweep-frequency tests.

SPECIFICATIONS: Frequency—Range: 0.1Hz to 1MHz in six ranges. (Each range provides >100:1 freq. control.) **Ext. Control:** >100:1 on any range with 0-5.5V input. **Accuracy:** 5% of f.s. **Stability:** .05% (after 15 min.) **SQUARE WAVE—Symmetry:** 99% to 100kHz. **Rise/Fall Time:** <100ns. **TTL Square Wave:** <25ns rise/fall time. **TRIANGLE WAVE—Linearity:** 99% to 100kHz. **SINE WAVE—Distortion:** <1% 0.1Hz to 100kHz; <0.5% typical. **Amplitude Flatness:** <0.3dB to 1MHz at max. output. **OUTPUT—Amplitude:** 20Vp-p open circuit, 10Vp-p into 600Ω. Continuously variable, >30dB range. **Output Z:** 600Ω ± 5%. **DC Offset:** Var. to max. of ± 10V open circuit or ± 5V at 600Ω. **GENERAL—Operating Temp.:** 0-50°C. **Power:** 105-130VAC, 60Hz, 8W. **Size (HWD):** 8.1 x 29 x 20cm (3.2 x 11.3 x 7.8") incl. handle. **Weight:** 1.3kg (2.9 lbs.). CSA listed.

80 MHz Counter with Period Mode and Timer



	LIST PRICE	OUR PRICE
BKP-1820	$300.00	$265.00

FEATURES: • 5Hz to 80MHz reading guaranteed—100MHz typical • Period measurements from 5Hz to 1MHz. • Period average, auto and manual positions • One PPM resolution • Totalizes to 999999 plus overflow • Elapsed time measurements from .01 to 9999.99 seconds plus overflow • One-megohm input resistance • Bright,. 43" high LED readouts.

SPECIFICATIONS: FREQUENCY—Range: 5Hz to 80MHz Gate Time Auto: 10ms (MHz) and 100ms and 1, sec. (kHz). Gate Time Man.: 1 sec. (1Hz reso.). **Accuracy:** ±t.b. accur. ±1 count. **Resolution:** ±0.0001% (i.e. 1PPM of a 6 digit scale). **PERIOD—Range:** 5Hz to 1MHz; μs (100 period aver.) or AUTO reading. **Period Aver. Auto:** 1 period aver. (ms), 10 and 100 period aver. (μs). **Period Aver. Man.:** 100 and 100 period aver. (μs reading with 1ns reso.). **TOTALIZE CHAR.—Range:** 5Hz to 80MHz; 0 to 999999 plus overflow. **Control:** Man. reset to 0; convertible to remote reset. **ELAPSED TIME—Range:** .01 to 9999.99 sec. plus overrange. **Trigger:** TTL or contact closure. **Reset:** Manual, on front panel. **INPUT—Impedance:** 1 MΩ; 25pF. **Coupling:** AC. **Sensitivity:** 30mV rms, 5Hz to 40MHz; 50mV max. at 80MHz. Derate linearly to 100 V (peak AC + DC) at 1kHz, **Max. Input:** 200V (peak AC + DC) DC to 500 Hz, derate linearly to 30V (peak ac + dc) @ 80MHz. **Attenuator:** X10 switch sel. **INT. TIME BASE—**(25°C;½ hour warm-up) 10MHz Crystal Oscillator. **Setability:** ±0.1 PPM (±1Hz). **Stability:** <±1PPM for ±10° Line Voltage Variation;<±0.001% (i.e. ±10 PPM) from 0° to 50°C ambient. **Max. Aging:** ±1 PPM/YR. **Ext. Input:** TTL Level, switch sel., **General—Power:** 105V to 130V and 212 to 258V, 50/60 Hz. **Size (HWD):** 8.1 x 29 x 19 cm. (3.25 x 11.6 x 7.50") incl. handle. **Weight:** 1.4 kg (3 lbs.).

Portable Autoranging Digital Capacitance Meter



	LIST PRICE	OUR PRICE
BKP-830	$199.00	$174.00

- **Automatically measures capacitance from 0.1pF to 200 mF**
- **0.1pF resolution**
- **No range switching**
- **10 internal ranges for accuracy and resolution**
- **0.2% basic accuracy**
- **Range hold switch**
- **Zero control for test lead compensation**
- **3½ digit LCD display**
- **Banana jacks and special lead insertion jacks**
- **Battery or AC operation**
- **Fuse-protected**

CAPACITANCE

Range: 10 automatically selected ranges with full scale value from 199.9pF to 199.9mF (reads from 0.1pF to 0.2F, with resolution of 0.1pF). **Accuracy:** *Auto* .2% of reading, ±0.5pF, ±1 digit to 19.99uF, 1% of reading, ±1 digit from 20uF to 199.9mF; *Hold* all specs between 180 & 1999 counts same as Auto; for all readings between 0 and 179 counts add: 0.1% of full scale to 19.99mF full scale, 0.5% of full scale from 19.99uF full scale to 199.9mF full scale. **Resolution:** 0.1pF on lowest range and 0.05% of full scale on all other ranges. **Reading Time:** 0.4-1.0 SEC to 0.20mF; increasing to 6 SEC at 200mF. **Zero Control:** Can compensate up to 25pF of test lead capacitance. Minus sign (–) indicates overcompensation. **Overrange Indicator:** (All Ranges) plus sign (+) with blank display and mF LED on.

GENERAL

Display: 3½ digit LCD display. **Front Panel Controls:** Range HOLD switch, ZERO adjust, ON-OFF switch. **Power Source:** 4 standard "C" size cells operating from 4.2-6 volts, nicad, alkaline, or zinc carbon, with provision for AC adapter/charger. (Note: batteries and charger are not supplied.) **Battery Life:** 20 hours minimum, continuous use. **Operating Temperature:** +15°C to +35°C (59°F to 95°F) at stated accuracy. **Usable range at reduced accuracy:** 0°C to 50°C (32°F to 122°F). **Dimension:** 16 x 11 x 6cm (6.4 x 4.4 x 2.4"). **Weight:** 725g. (1.6 lbs.) with batteries. **Optional Accessories:** BC-28 AC adapter/charger, BP-28 battery pack, LC-28 carrying case.

New Portable Digital Capacitance Meter



	LIST PRICE	OUR PRICE
BKP-820	$155.00	$140.00

FEATURES: Measures capacitance to 1 Farad in 10 ranges • Resolves to 0.1pF on lowest range • 4 digit easy-to-ready LED display • 0.5% accuracy • Special lead insertion jacks and banana jacks • Fuse protected • Uses either rechargeable or disposable batteries • Overrange indication.

APPLICATIONS: Measure: unmarked capacitors • cable capacitance • trimmer capacitors • capacitance in switches and other components • capacitor tolerance for incoming inspection, QA; Design use.

SPECIFICATIONS: Capacitance—Range: 0.1pF to 1000 millifarads (1 Farad) in 10 ranges. **Accuracy:** 0.5% of F.S., ± 1 digit to 100μF; 1% of F.S., ± 1 digit from 1000μF to 1000mF. **Resolution:** 0.1pF on lowest range. **Reading Time:** 0.6 sec to 10mF, increasing to 35 sec max. at 1000mF. **Overrange:** Bottom segments of digits are "ON" for overrange. **GENERAL: Display:** 4 digit LED. **Power:** (4-6 volts) 4 standard "C" size cells, nicad, alkaline or zinc carbon, with provision for charger (batteries and charger not supplied). **Battery Life:** 8 hours min. **Operating Temp.:** 0°C to 50°C (32° to 100°F). **Size (HWD):** 16 x 11 x 6cm (6.4 x 4.4 x 2.375"). **Weight:** 675g. (1.15 lbs.) with batteries. **Optional:** BC-28 charger, BP-28 battery pack, LC-28 carrying case.

WE ACCEPT VISA, and MASTER-CHARGE

PRIORITY ONE ELECTRONICS




LOW-PROFILE BASE
$13.95 PNV-305
SH.WT. 2 lbs.

VACUUM BASE
$19.95 PNV-380



SH.WT. 2 lbs.

PANAVISE STANDARD BASE
PNV-300 $13.95



SH.WT. 2 lbs.


WIDE OPENING VISE HEAD




$15.95
PNV-366
SH.WT. 2 lbs.



$17.95
SH.WT. 2 lbs.
PNV-304
HORIZONTAL JAW VISE HEAD




Not Included
$12.95
PNV-312 TRAY BASEMOUNT
SH.WT. 2 lbs.




PNV-315
$19.95
SH. WT. 1 lb.
P.C. BOARD HOLDER
with 14" bar
FITS S-100 BOARDS

$16.95
PNV-311
SH.WT. 3 lbs.
BENCH CLAMP




STANDARD VISE HEAD
$16.95 PNV-303
SH.WT. 2 lbs.

PANAVISE TILTS, TURNS, AND ROTATES TO ANY POSITION. IT HOLDS YOUR WORK EXACTLY WHERE YOU WANT IT.




Hunter Tools




SEMI-FLUSH CUTTING Regular head design for #20 (.032") soft copper or smaller. A popular cutter on the assembly line. Exclusive duradium process (see tech sheet). Makes this cutter tough for electronic production applications.

A = 4⅛ **HNT-20197(c) $12.25**




FULL FLUSH CUTTING Our most popular cutter. Slim taper nose design plus full flush cut at extreme tip combine to make the ideal production cutter. Recommended for #20 (.032") soft copper wire or smaller. Exclusive duradium process (see tech sheet) gives unmatched life to the cutting edge. Perfect for P.C. board and related high density applications where clearance is a factor. A = 4¼"

HNT-20195(c) $12.46



SEMI FLUSH CUTTING Taper nose and tip cutting. This cutter is larger than the #20195 for durability and longer life. Recommended for #18 (.0403") and smaller copper wire. Ideal for P.C. board and related type applications where density allows a larger head profile. A = 4¾"


HNT-20186(c) $12.72



TIP DYKE - SEMI-FLUSH CUTTING For getting in those tight spots with maximum visibility. Cuts at the extreme tip and has alignment pin to keep the cutter blades aligned. Recommended for nickel ribbon size .010" x .030" and smaller. Also #22 (.0253") and smaller copper wire. Perfect for work on D.I.P.'s and other I.C. packages where clearance and visibility are factors. A = 4¾"


HNT-20190 $20.09

ULTRA FINE "DELICATE" CUTTING AND BENDING APPLICATIONS. DELICATE YET DURABLE




HNT-20177 $10.04

FULL FLUSH CUTTING Tiny delicate cutter. Thin taper jaw plus overall small size. Gets into those tight spots. Ideal for super high density P.C. board work and rework, and other delicate jobs. Recommended for #24 (.020") and smaller copper wire. A = 3 13/16"



A = 4¼"
HNT-20144 $12.46


MINIATURE CHAIN NOSE Miniature for extra fine work. Designed for bending, forming or holding delicate parts and assemblies found in the electronics industry. Also widely used wherever precision pliers are required such as instrumentation work, hobbyists, technicians, etc. Radius edges and smooth gripping surface for protection of delicate assemblies.



HNT-21029 $14.73


CURVED MINIATURE CHAIN NOSE Similar to #20144 but with curved nose. Gets into those tight spots. Particularly suited to P.C. board rework and instrumentation applications. A = 4½"

FINE CUTTING AND BENDING APPLICATIONS. DELICATE YET DURABLE FLUSH AND SEMI-FLUSH CUTTERS. RECOMMENDED FOR USE ON #18 (.040") AND SMALLER SOFT COPPER WIRE. ALL HUNTER PRECISION ELECTRONIC CUTTERS COME COMPLETE WITH SPRING, COLOR CODED CUSHION GRIP HANDLES, AND FULL POLISH HEAD.




NARROW CHAIN NOSE Serrated jaw, radius edged for precision looping, twisting, and bending. Serrated jaw for extra grip with minimum pressure. A delicate yet durable tool for production use.

A = 4¾" **HNT-20150(c) $10.04**




EXTRA LONG NEEDLE NOSE Serrated jaw radius edged. For precision pulling, clamping and holding. Strong taper point insures long working life, serrated jaws for firm grip using less pressure. Reduces fatigue. Perfect for production line use. A = 5⅝"

HNT-20105(c) $11.38




SUPER THIN NEEDLE NOSE Smooth jaws, radius edged for precision bending, reaching, clamping and forming. Delicate needle nose allows access to remote areas. Ideal for guiding leads through high density areas.


A = 4¾" **HNT-20114(c) $11.12**




SUPER THIN - EXTRA LONG - NEEDLE NOSE Smooth jaws, radius edged. Similar to #20114 but longer. Extra long "delicate" needle nose allows access to remote areas. A = 6"

HNT-20115(c) $11.79






Stripper and Cutter with spring
HNT-25508 $3.08



STRAIGHT NOSE FORCEP CLAMP
5" Model **HNT-54035 $6.43**


FORCEP CLAMP (Hemostat, Forcep) Popular in the electronics field with applications throughout industry. Clamps, holds and positions small parts, wires, pins, etc.

KNIFE SETS



HEAVY DUTY KNIFE SET includes three knives, regular #50130, heavy duty #50160 and extra heavy duty #50170, plus 10 assorted blades. Packed in compact clear plastic carrying case.

HNT-50182 $6.43



PRECISION KNIFE SET Popular set both in industry and with the hobbyist. Complete with two most popular handles #50130 and #50160 plus 10 assorted blades. Packed in compact clear plastic carrying case.

HNT-50183 $4.55

CA, AK, HI, CALL (213) 894-8171

MODULAR SOLDERING TOOLS


Designed for Professionals by Professionals

STANDARD LINE SOLDERING TOOLS

The modular "Standard Line" provides the professional with a durable yet economical iron for all types of soldering. Handles are perfectly balanced for comfort and fatigue-free soldering. Heaters provide fast recovery and maximum heat transfer. All irons are 120 VAC.

Note: 1. All electrical Tools & Components are UL Listed and bear the mark. Rated at 120 Volts AC/DC.
2. All Temperature Ranges are Approximate.
3. Tip not included.

New




#750

MODEL 750 GROUNDED 3-WIRE HANDLE

The handle when assembled with the S or HP Series heaters, is completely grounded from tip to plug and eliminates electrostatic tip potential. A unique, spring-loaded ground plate reflects heat away from the operator's hand. **For use only with S or HP heaters.**


Ungar Model 750 Grounded Handle — UNG-750 ..... **$9.95**



MODEL 777 CLEAN ROOM HANDLE

Convection-cooled, molded grip for "clean room" use. Octagonal handle prevents rolling. Stainless steel heat reflector. Accepts all Standard Line heaters and integral heater/tips, including the S and HP series.

Ungar Model 777 Clean Room Handle — UNG-777 ..... **$4.95**



S SERIES STAINLESS STEEL HEATERS

Constructed of corrosion-resistant stainless steel. Units feature improved 2- or 3-wire versatility, high strength, resistance to abuse and provide positive transfer of heat to the tip. Wedge-shaped base guide permits firm, taper-fit assembly to the handle. The heat reflecting shield also provides a positive ground when used with Model 750 grounded handle. Models 537-S, 1237-S and 4037-S Thread-On Heaters will accept all ¼" Thread-On Tips and, with No. 100 Adapter, all ⅛" Thread-in Tiplets and Nibs; with No. 101 Adapter, all 3/16" Thread-in Tips.

FOR ¼" THREAD-ON TIPS				
PART NO.	TEMP.	WATTS	SIZE	PRICE
UNG-537-S	Approx. 700	23	3.67" lg. x .365" diam.	$5.40
UNG-1237-S	Approx. 800	33	3.65" lg. x .375" diam.	$6.47
UNG-4037-S	Approx. 900	45	3.45" lg. x .365" diam.	$8.43

3 WIRE LINE



The ultimate tool...approved grounding ensures maximum safety from static-induced currents to sensitive circuitry. Meets NASA/military standards plus gives you the versatility of more than 40 tips, tiplets, nibs, and three fast-change heater units. Handle up to 30° cooler. New heat resistant cord set. Use ¼" thred-on tips or adapters

COMPLETE 3-WIRE IRON

PART NO.	DESCRIPTION	SUGGESTED USER PRICE
UNG-127	Handle, 650°-750° F., 27W.	$14.88
UNG-135	Handle, 750°-850° F., 35W.	$14.88
UNG-145	Handle, 900°-1000° F., 45W.	$14.88

¼" THREAD-ON TIPS AND ADAPTERS



PL-111 PL-113 PL-114 PL-133 PL-138 PL-151 PL-153 PL-155


TIPS

Ungar No.	Material	Tip Shape	Size, Ins. Ovrl. Lgth.	Size, Ins. Tip Diam.	Net Each
		¼" THREAD-ON TIPS			
UNG-PL111	Plated*	Pencil	1-1/4	1/8	$1.85
UNG-PL113	Plated*	Chisel	1-1/4	1/8	$1.85
UNG-PL114	Plated*	Micro spade	1	.05	$1.85
UNG-PL133	Plated*	Taper chisel	1-1/16	1/8	$1.92
UNG-PL138	Plated*	Needle	1-1/4	3/64	$1.85
UNG-PL151	Plated*	Screwdriver	1-1/4	1/8	$1.85
UNG-PL153	Plated*	Chisel	1-1/16	3/16	$1.85
UNG-PL155	Plated*	Stepped chisel	1-1/4	1/16	$1.85
		ADAPTERS			
UNG-100		1/4" thread-on heaters to 1/8" thread-in tips			$ .63
UNG-101		1/4" thread-on heaters to 3/16" thread-in tips			$ .63

* Iron clad and silver plated.


PRINCESS® MICRO LINE

Ungar Princess SOLDERING STATION



Princess Kit
UNG-6975 ..... **$21.59**
Complete Princess iron with 3 interchangeable copper nibs. Includes #6902 2-wire handle, #6910 10W heat capsule and #6950, #6951 and #6952 soldering nibs.

Princess Soldering Station
UNG-6900 ..... **$28.50**
Complete 10W soldering station. Fully assembled iron with 3 copper nibs plus Princess iron holder and cleaning sponge. Includes #6902 2-wire handle, #6910 10W heat capsule and #6950, #6951 and #6952 nibs, #6990 iron holder and sponge.



Designed expressly for the special needs of micro-electronic assembly. This popular precision tool design enables pinpoint hand control, comfort and accuracy assuring hi-yield soldering of delicate circuitry and components in the tightest spaces.

HANDLES


PART NO.	DESCRIPTION	PRICE
UNG-6902	Nylon Pastel Turquoise, Plastic cool-grip, 2-wire plug & cord.	$ 8.72
UNG-6903	Nylon Pastel Turquoise, Plastic cool-grip, 3-wire plug & cord.	$11.78

HEAT CAPSULES (Accepts all ⅛" nibs and tiplets)

UNG-6918	Reach: 2⅜", 775°-850° F., 18W				$10.58
	⅛" PRINCESS NIBS				
UNG-6960	Plated†	Pencil	3/8	1/16	$1.62
UNG-6961	Plated†	Screwdriver	7/16	1/16	$1.62
UNG-6962	Plated†	Spade	3/8	1/16	$1.62
UNG-6963	Plated†	Precision	3/8	1/16	$2.90
UNG-6953	Copper	Precision	3/8	1/16	$1.58

† Iron clad and gold plated.

DE-SOLDERING EQUIPMENT



7805




6948



6982 6983

PART NO.	DESCRIPTION	PRICE
UNG-50 DK	Ungarmatic® Desoldering Kit. Adapts for fast, easy removal of 14 and 16 pin DIP's. Kit includes 95 Tip Adapter, 6982 Extractor, 6948 Bar Tip, 5013 Super-Wick Desoldering Braid	$12.45
UNG-51 DK	Desoldering Kit. Same as above. With 100 Adapter, fits Ungar Heaters. Standard 1237-S, 4037-S, 37 H.P. 3-wire 135, 145 DI® 361, 362	$11.20
UNG-5002	Super-Wick™ 050 W Desoldering Braid	$ 1.65
UNG-5004	Super-Wick™ 100 W Desoldering Braid	$ 1.89
UNG-6980	DIP Extractor Pliers	$14.95
UNG-6982	Dual In-Line Extractor. Removes up to 16 pin IC's, use 6948 desolder tip	$ 4.22
UNG-6983	TO-5 Extractor, for most TO type cans, use desolder tips: 6943, 6944, 6946	$ 4.87
UNG-6948	Desolder Tip, for DIP's, Iron Clad, pre-tinned	$ 5.00
UNG-7805	Solder-Off Bulb with TEE tip	$ 2.88

PRODUCTION AIDS



8000



8800



6990



400

PART NO.	DESCRIPTION	PRICE
UNG-8000	Iron Holder. All Irons*	$4.88
UNG-6990	Iron Holder, for Princess Iron only	$7.90
UNG-8800	Iron Holder. All Irons* plus Ungarmatic® and Hot Vac 2000	$9.50
UNG-400	Kleen-Tip Sponge & Tray, fastens to workbench, sponge replaceable	$2.65
UNG-455	Replacement sponge	$1.05

HEAT GUN



Specifically built for electronic assembly, the ⅜" nozzle enables precise, accurate heat flow (750°-800° F.) for a variety of applications including: shrink tubing, curing cements, reflow soldering, cooling/drying, encapsulation, shrink films, and component stressing. Four baffle adapters standard with heat guns for complete versatility. Weighs 13 oz. Convenient 3-way switch. Case of UL recognized glass filled plastic. #6966C complete with 3-wire NEMA plug for approved grounding.

PART NO.	DESCRIPTION	PRICE
UNG-6966C	3-Wire Model, 4 baffle adapters standard	$59.95

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS



UNGARmatic®

MODULAR SOLDERING TOOLS

Designed for Professionals by Professionals

Controlled Soldering Station

THREAD-TOGETHER MODULAR DESIGN FOR QUICK, ON-LINE HEATER OR TIP CHANGE

- Available in 3 preset temperatures; 600°F., 700°F. or 800°F. for any application.
- Closed loop, non-magnetic control.
- Low voltage system; 3 wire grounded.
- Biomechanical designed handle with cool grip for operator comfort. Cord is super flexible 3 wire grounded, heat resistant.
- Large capacity snap-on tray and sponge; removable for optional placement.
- Long life interchangeable tips; iron clad, chrome plated, pre-tinned.
- Designed for use on sensitive components.

Transient Spikes

Transient spikes caused by the switching action of some controlled output soldering stations may be transmitted to the workpiece and may adversely affect a metal oxide semiconductor, particularly if the amplitude of that spike is in excess of the operating voltage of the device. UNGARmatica Temperature Controlled Soldering Stations and Irons suppress transient spikes to less than the 5 volt operating voltage of sensitive MOS devices.


COMPLETE STATION SELECTION GUIDE

FOR THIS TEMPERATURE		ORDER COMPLETE STATION PART #
600°F	(MOST POPULAR)	UNG-50T6
700°F		**UNG-50T7**
800°F		UNG-50T8

LIST PRICE: $69.95

OUR PRICE: $62.96

Each of the above stations include: #70B Power Supply with on/off switch, indicator light, and 3 wire power cord; #71 Handle with 3 wire heat resistant secondary cord; #89 Tray and Sponge; #72 Iron Holder; Controlled Heater with #87 Screwdriver tip 1/16."



Iron clad, chrome plated, pre-tinned tips

UNG #80 Long Screwdriver 1/8" $2.56
UNG #83 Screwdriver 3/32" $2.56
UNG #86 Needle Tip 3/64" $2.56
UNG #88 Long Screwdriver 3/64" $2.56
UNG #93 Screwdriver 1/32" $2.56

UNG #95 TIP ADAPTER Tip Adapter #95 for special micro applications. This Adapter is designed for the use of 1/8" thread-in Princess Nibs. **$1.59**

EDSYN INC.®

PORTABLE DESOLDERING TOOLS

EDS-AS196 **$21.95**



Special purpose SOLDAPULLT for low static work stations. Deluxe features. Static conductive construction reduces sensitive component damage.

EDS-DS017 **DELUXE** **$17.95**



Rugged manual loading tool for volume desoldering. High vacuum. Heavy duty plastic. Fully enclosed shaft for safety. Plunger lock feature for compact storage.

EDS-PT109 **$12.50**



Sturdy tool for routine desoldering. Slim profile, smooth action, very low recoil. Plunger lock feature for compact storage.

EDS-US340 **$11.95**



LOW STATIC POTENTIAL


Completely portable. One hand loading, three position stroke adjustment. Swift vacuum action.

EDS-US140 **$8.95**



Compact manual loading tool. Easy one hand operation. Adjustable three position loading stroke. Low mass plunger, rapid vacuum impulse, negligible recoil.

EDS-MV124 **$5.95**



MINI VACUUM PUMP

Designed for desoldering microminiature components and fine wiring. Resilient teflon tip, spring arrestor plunger with cleaning shaft.

REPLACEMENT TIP FOR SOLDAPULLTS

CAT. #	TOOL USED	PRICE
EDS-SRT12	DS017, PT109, US140	$2.95
EDS-LS197	AS196, US340	$4.50
EDS-EC131	MV124 (END CAP)	$1.95
EDS-ST132	MV124 (TIP)	$1.95

SUPER-WICK™ DESOLDERING BRAID

CAT. #	WIDTH	PRICE
UNG-5002	.050"	$1.65
UNG-5004	.100"	$1.88

ISO-TIP®



ISO-Tip Cordless Soldering Irons


- Up to 125-150 Joints per charge
- 5-10 Seconds average soldering heat time
- Tip performance up to 50 watts and over 700°F tip temperature
- Built-in work light
- "Lock off" switch
- Rechargeable battery & charger included
- Cannot over charge

ISO-7800 $38.95
Fastest recharging iron on the market. Recharges fully in one hour.

ISO-7740 $28.95
"Quick Charge" Recharges completely in 3 to 4½ hours.

ISO-7540 $25.50
"The Original" Recharges completely in 12 to 16 hours.

ISO-6500 $11.95
P.C. Drill attachment with No. 56 Bit.



SOLDER

The best for general wire and printed circuit soldering 60% tin, 40% lead alloy, .032" dia. (21 guage) with triple resincore.

TCH1832	1 lb.	$13.41
TCH1835	½ lb.	$ 7.44

COLE-FLEX CORPORATION

IRRADIATED POLYOLEFIN SHRINKABLE TUBING

- Conforms to MIL-I-23053B/5
- Shrinks 50% (2:1 ratio) with only 5% longitudinal shrinkage
- Fewer sizes covering more applications
- Operating temp. range: -55°C to +135°C
- Dielectric strength: 500μ per mil

Part No.	Size	Price 4 ft. Length	100 Ft. (25 x 4 ft Lengths) Add "C" to end of Part No.
CST 364XX	3/64"	$1.05	$22.36
CST 116XX	1/16"	$1.10	$23.83
CST 332XX	3/32"	$1.25	$27.04
CST 18XX	1/8"	$1.30	$28.59
CST 316XX	3/16"	$1.60	$34.73
CST 14XX	1/4"	$2.00	$43.94
CST 38XX	3/8"	$2.25	$48.94

When ordering—Replace "XX" with color code: Color Codes: BK-Black, WH-White, RD-Red, YE-Yellow, BU-Blue, CL-Clear

NIBBLING TOOL

This Nibbling Tool is perfect for cutting, trimming, or notching sheet metal up to 18 guage.

It operates like a punch and die and also works well on aluminum or plastic up to 1/16" thick. We feel that this tool can be a real time-saver for our customers when working on chassis, printed circuit boards and prototype model boards.



TLX-201 NIBBLING TOOL **$8.95**

PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS

ISOBAR™

Model IBAR4-6 with 6 foot power cord
Model IBAR4-15 with 15 foot power cord

- 4 Standard 3-prong plugs
- 4 100 KHz to 200 MHz filters
- Inductively isolated grounds
- Sockets individually filter isolated
- Each socket isolated from power line
- On-Off switch • Indicator light
- Circuit breaker protected at 15A.

High Voltage Spike Protection: 1000 A, 8/20 usec; pro-1000 A, 8/20 usec; protection from repeated spikes.
Load Handling: 1875 W MAX. total load; 15A per socket.
Input: 125 VAC, 15 Amps; Standard 3-prong plug.

PROTECT YOUR INVESTMENT PROTECT YOUR DATA WITH



GOF-IBAR46

LIST PRICE $79.95
OUR PRICE $59.95


POWERMATE

GSC

BY™ UL LISTED MULTIPLE OUTLET STRIPS

Designed with GSC's traditional regard for quality, safety and long life, Powermate Multiple Outlet Strips set a new standard of excellence. The unique two-piece extruded Aluminum Channel body is very strong and rigid for maximum wearability. All Powerstrip models are circuit-breaker protected, CSA and UL listed.

GENERAL SPECIFICATIONS:
Size: 2" W x 1¾" H. (Length according to Model). **Maximum Power Rating:** 15A, 125 VAC, 60 Hz, 1875 Watts continuous duty. **Outlets:** 3-prong "U" ground. **Case:** Anodized, extruded aluminum. **Protection:** Circuit Breaker. 6' line cord.



MODEL	LENGTH	OUTLETS	SWITCH	LIGHT	PRICE
GOF-9P5-6	9"	5	No	No	$15.95
GOF-9PLS4-6	9"	4	Yes	Yes	$16.95
GOF-12P7-6	12"	7	No	No	$17.95
GOF-12PLS6-6	12"	6	Yes	Yes	$18.95
GOF-24PLS8-6	24"	8	Yes	Yes	$24.95
GOF-48PS8-6	48"	8	Yes	No	$32.95
GOF-72PS8-6	72"	8	Yes	No	$36.95

RACK MOUNT OUTLET STRIP



7 OUTLETS WITH SWITCH & PILOT LIGHT

Anodized aluminum. 1 outlet on front, 6 on back. Size: 19" W x 3½ H x 3⅛" D.


GOF-19RRPS7 - with 6 foot power cord. **$34.95**

ANTRONIC Corporation UL LISTED JUNCTION BOXES


PROTECTION — UL listed and 100% factory tested • Reliable push-to-reset circuit breaker • Tough 14-guage jacketed 3-wire, 6 foot cord with molded plug • Rugged steel housing • Electrical and mechanical grounding throughout unit.

CONSTRUCTION — All wiring mechanically fastened and soldered • Multiple keyhole mounting • Silicone enamel finish • U-ground 3-prong outlets.

UTILITY — Models for every application • End-mounted cords • Full 15 amp, 125 volt A.C. rating.

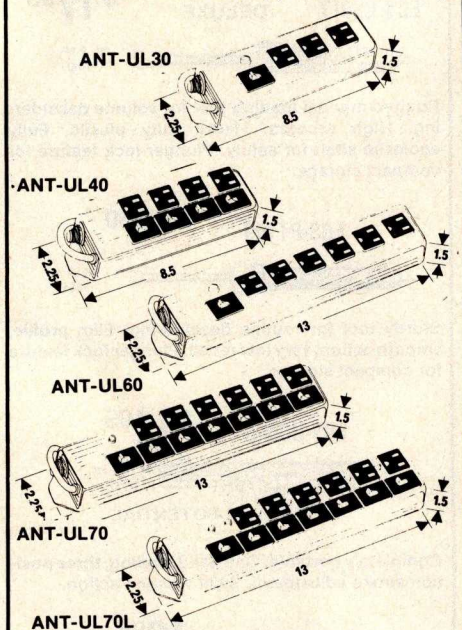

Model Number	Master Switch & Pilot	Outlets Only 3-Prong	Switched Outlets 3-Prong	Switched w/Pilot 3-Prong	Price
ANT-UL30	1	3	—	—	$16.00
ANT-UL40	—	—	4	—	$19.25
ANT-UL60	1	6	—	—	$18.95
ANT-UL70	1	—	6	—	$29.90
ANT-UL70L	1	—	—	6	$35.05

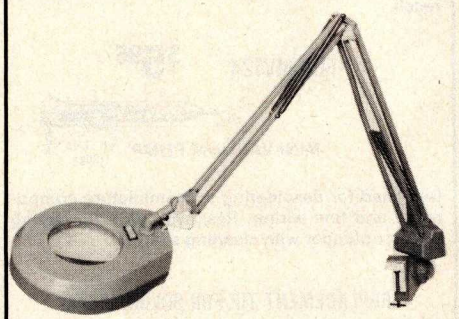

Magnifier IM SERIES

Perfectly balanced fluorescent lighting with precision magnifier lens. Tough thermoplastic shade. Easy lens removal. New wire clip design permits easy installation and removal of fluorescent tube. Comes with plastic shield to protect tube from soiling and damage.

Colors: Gray, Black. Comes with one 22 watt T-9 Circline fluorescent tube. 3 diopter lens standard. Shipping weight with bracket: 8 lbs.

*Reach: Model IM-10, 42"

		LIST PRICE	OUR PRICE
LDU-IM10A-WH	WHITE	$94.95	$69.95
LDU-IM10A-GY	GRAY	$94.95	$69.95
LDU-IM10A-BK	BLACK	$94.95	$69.95
LDU-IM10A-CB	CHOC BROWN	$94.95	$69.95
LDU-5DLNS	5 DIOPTER LENS		$14.00

SURGEONICS LIMITED

Protection against transient over-voltage

The units consist of a two-gate solid state circuit board protected by a 3 amp fuse.

Upon the occurrence of a transient over-voltage above 6% of the line voltage, the components in the two-gate system react in tandem to allow pico-second response time and energy dissipation.


The transient voltage is thereby suppressed to a safe non-destructive level.

Product Specifications:

- 120 Volts, Single-Phase, 40/70 Hz.
- Steady State Power Dissipation: .85W.
- Transient Energy Dissipation: 20 Joules.
- Max. Peak Current 2000 amps.

INTERCEPTOR SURGE-LESS SOCKET™

Model ISS 701-R



Patent Pending

SRG-ISS-701-R

1-4	5-9	10-24
$21.80	$20.25	$18.50


Shipping Weight: 8 oz.

CONTROLS . . .
ELECTRICAL SURGES — PROTECTS YOUR VALUABLE ELECTRICAL EQUIPMENT

POWER-SENTRY

Patent Pending

Model PS 701-D



SRG-PS-701-D

1-4	5-9	10-24
$31.50	$29.30	$27.00

Shipping Weight: 8 oz.

COMP-ONICS ELECTRONIC ATTENUATOR

- **POSITIVE PROTECTION FOR SOPHISTICATED EQUIPMENT**
- **MORE ACCURATE REPORTS**

The Model 708 can be utilized in applications where inductive and switching transients are present and jeopardize the electonic circuitry of data processing equipment, computer power supplies and numerical controlled machinery. When the Comp-onics Model 708 is connected harmonic distortion and transients are instantaneously clamped to a safe efficient operating level.



Patent Pending

SRG-CO 708

1-4	5-9	10-24
$235.00	$218.55	$199.75

VISIT OUR RETAIL STORE

OPEN FRAME POWER SUPPLIES

GSC


FEATURES:
- Designed to comply with all applicable UL & CSA specifications!
- Pluggable IC regulators - user replaceable!
- Remote sensing!
- Fold back currents limiting!
- Unconditionally guaranteed for two years!
- Manufactured and serviced in U.S.A. and Canada!
- Industry standard frame sizes for simplified second sourcing!

Basic features of all GOF Series units include: dual AC primary hookup for 115/230 VAC connection with 50 Hz provision; oversize lo-flux transformers; pluggable IC regulators, 85° computer-grade electrolytics; metal-can power transistors, FR-4 circuit boards with 2 oz. copper track; remote sensing; fold back current limiting; multi-surface mounting with factory-installed captive hardware; industry standard frame size for simplified alternative sourcing.

Premium components are used in all units to enhance reliability. All IC regulators are pre-burned and checked before installation in actual units. IC's are socket mounted and user replaceable. Computer-grade capacitors are rated to 85° operating levels and are built to GSC's own specifications for low ESR to enhance long life. All power transistors are metal-can devices and are graded for important parameters by GSC's own quality assurance group before release to production.

SPECIFICATIONS:

Input:	105-125 VAC / 210-250 VAC, 47-63 Hz.
Line Regulation:	0.05% over entire operating range.
Load Regulation:	0.1% for no load to full load current.
Output Ripple & Noise:	1 mV RMS / 3 mV peak-to-peak typical.
Remote Sensing:	On all models except GOF-M series, FDD100 and GOF 2A-1D.
Transient Response:	No overshoot or undershoot on turn-on or turn-off.
Overload Protection:	Foldback current limited, self restoring.
Ambient Operating Temp.:	Continuous duty from 0°C. to 60°C.
Mounting:	Multi-surface mounting with 8-32 captive hardware.
Cooling:	Convection cooled.



GOF Midget Series: $26.00

GOF M—5	5 V / 1.2 A
GOF M—12	12 V / 0.5 A
GOF M—15	15 V / 0.5 A
GOF M—24	24 V / 0.4 A
GOF M 2—6	2 to 6 V / 1 A
GOF M 10—16	10 to 16 V / 1 A
GOF M 16—24	16 to 24 V / 1 A

Dim.: 1.9" x 4.0" x 4.0"
Weight: 3 lbs.



GOF-3 Series: $74.00

GOF 3—5	5 V / 1.2 A
GOF 3—12	12 V / 8.0 A
GOF 3—15	15 V / 6.6 A
GOF 3—24	24 V / 4 A
GOF 3—28	28 V / 3.5 A

Dim.: 2.75" x 9.0" x 4.87"
Weight: 8 LBS.

GOF-3X Series: $89.00

GOF 3X—5	5 V / 15 A
GOF 3X—12	12 V / 10 A
GOF 3X—15	15 V / 8 A
GOF 3X—24	24 V / 6.5 A
GOF 3X—28	28 V / 4.5 A

Dim.: 2.75" x 9.0" x 4.87"
Weight: 10 LBS.

GOF-FDD-100 Series: $89.00

GOF-FDD100	24 V / 2 A	5 V / 1.5 A	5 V / 5 A
GOF-FDD101	12-15 V / 1 A	5 V / 3 A	12-15 V / 1 A
GOF-FDD102	24 V / 2 A	5 V / 3 A	12-15 V / 1 A

Dim.: 2.80" x 10.25" x 4.00"
Weight: 6 LBS.

Overvoltage Protection Modules


GOF-OVF-1	Below 6 A	$ 8.00
GOF-OVF-2	6 A to 10 A	$12.00
GOF-OVF-3	15 A to 25 A	$24.00

Weight: 1 lb.

GOF-1 Series: $36.00

GOF 1—5	5 V / 3 A
GOF 1—12	12 V / 15 A
GOF 1—15	15 V / 1.2 A
GOF 1—24	24 V / 0.8 A
GOF 1—28	28 V / 0.5 A

Dim.: 1.62" x 4.00" x 4.87"
Weight:



GOF-4 Series: $125.00

GOF 4—5	5 V / 18 A
GOF 4—12	12 V / 12 A
GOF 4—15	15 V / 9.8 A
GOF 4—24	24 V / 6.1 A
GOF 4—28	28 V / 5.2 A

Dim.: 2.78" x 13.00" x 4.87"
Weight: 15 LBS.

GOF 2A-1D Series: $68.00


GOF 2A-1D A	12-15 V / 1.5 A	12-15 V / 1.5 A
GOF 2A-1D B	5 V / 1.2 A	5 V / 1.2 A
GOF 2A-1D C	5 V / 1.2 A	15 V / 0.5 A
GOF 2A-1D D	5 V / 1.2 A	24 V / 0.4 A

Dim.: 2.53" x 7.90" x 4.03"
Weight: 5 lbs.

GOF 2A IT Series: $115.00

GOF 2A-1T	5 V / 6 A 12-15 V / 1.5 A	12-15 V / 1.5 A
GOF 2A-1T A	5 V / 6 A 12-15 V / 1.5 A	5 V / 0.8 A
GOF 2A-1T B	5 V / 6 A 18-24 V / 1.0 A	5 V / 3 A
GOF 2A-1T C	5 V / 6 A 12-15 V / 1.5 A	18-24 V / 1.0 A
GOF-FDD 200	5 V / 3 A 24 V / 4.0 A	5 V / 1.0 A


Dim.: 2.78" x 11.00" x 4.87"
Weight: 12 LBS.

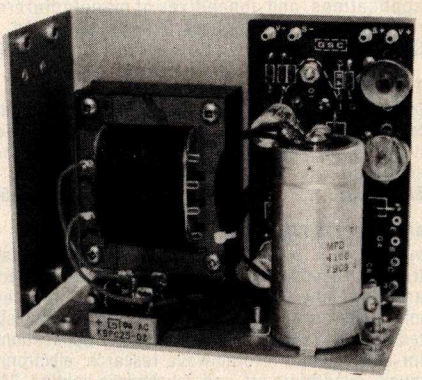

GOF-2 Series: $57.00

GOF 2—5	5 V / 6 A
GOF 2—12	12 V / 3 A
GOF 2—15	15 V / 2.8 A
GOF 2—24	24 V / 2.3 A
GOF 2—28	28 V / 2.0 A

Dim.: 2.5" x 4.87" x 5.62"
Weight: 5 lbs.

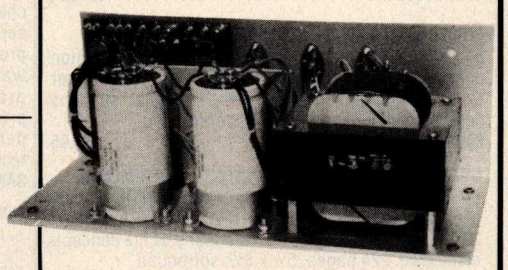

GOF-5 Series: $140.00


GOF 5—5	5 V / 25 A
GOF 5—12	12 V / 16 A
GOF 5—15	15 V / 13 A
GOF 5—24	24 V / 8.1 A
GOF 5—28	28 V / 6.9 A

Dim.: 6.0" x 13.25" x 4.88"
Weight: 15 LBS.

GOF 2A-2D Series: $90.00

GOF 2A-2D A	12-15 V / 3 A	12-15 V / 3 A
GOF 2A-2D B	5 V / 6 A	5 V / 6 A
GOF 2A-2D C	5 V / 6 A	12-15 V / 3 A
GOF 2A-2D D	5 V / 6 A	24 V / 2.3 A

Dim.: 2.78" x 11.00" x 4.87"
Weight: 10 LBS.

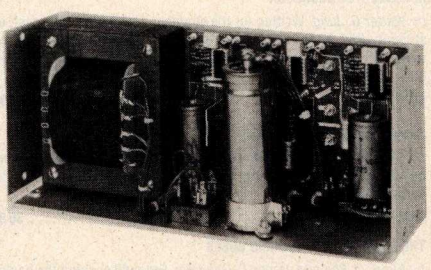

GOF 3A IT Series: $145.00

GOF 3A-1T A	5 V / 12 A	12-15 V / 3 A	12-15 V / 3 A
GOF 3A-1T B	5 V / 12 A	12-15 V / 3 A	18 or 24 V / 2 A
GOF 3A-1T C	5 V / 12 A	5 V / 6 A	12-15 V / 3 A
GOF 3A-1T D	5 V / 12 A	18 or 24 V / 2 A	12-15 V / 3 A

Dim.: 4.30" x 16.75" x 4.88"
Weight: 16 LBS.

GSC power supplies sell faster than we can stock our shelves. Please plan ahead and allow 4-6 weeks for delivery.

PLEASE ORDER BY PART NUMBER

SAMS BOOKS



IC OP-AMP COOKBOOK
by Walter G. Jung. The first book of its kind to be published. Covers not only the basic theory of the IC op-amp in great detail, but also includes over 250 practical circuit applicaions, liberally illustrated. Organized into three basic parts: introduction to the IC op-amp and general considerations, practical circuit applications, and appendixes of manufacturers' reference material. 592 pages; 5½ x 8½; softbound.
SAM 20969 ..... **$12.95**

TTL COOKBOOK
by Donald E. Lancaster. A complete and detailed guide to transistor-transistor logic (TTL) — what TTL is, how it works, and how to use it. 336 pages; 5½ x 8½; softbound.
SAM 21035 ..... **$9.50**

ACTIVE-FILTER COOKBOOK
by Donald E. Lancaster. A practical, user-oriented treatment of active filters. Explains what active filters are and how they work, and gives detailed information on design, analysis, and synthesis techniques. Explores some interesting applications for active filters in brainwave research, electronic music, quadrature art, and psychedelic lighting. 240 pages; 5½ x 8½; softbound.
SAM 21168 ..... **$14.95**

CMOS COOKBOOK
by Donald E. Lancaster. This well-known author presents an information-packed guide to this low-cost, fun-to-work-with digital logic family. 416 pages; 5½ x 8½; softbound.
SAM 21398 ..... **$10.50**

GUIDEBOOK TO SMALL COMPUTERS
by William Barden, Jr. Contains all the information needed for the prospective buyer of a small computer to make a wise selection from 21 popular systems described. 128 pages; 5½ x 8½; softbound.
SAM 21698 ..... **$4.95**

GUIDE TO CMOS BASICS, CIRCUITS, & EXPERIMENTS
by Howard M. Berlin. Discusses what CMOS devices are, their characteristics, and design rules. A series of 22 useful experiments illustrate many of the concepts discussed. 224 pages; 5½ x 8½; softbound.
SAM 21654 ..... **$8.95**

THE Z-80 MICROCOMPUTER HANDBOOK
by William Barden, Jr. Gives current and prospective users a one-stop source to Z-80 technology — hardware and software aspects and instrumentation problems. 304 pages; 5½ x 8½; softbound.
SAM 21500 ..... **$8.95**

USING THE 6800 MICROPROCESSOR
by Elmer Poe. Acquaints you with the hardware and software of the "6800" fun machine. 176 pages; 5½ x 8½; softbound.
SAM 21512 ..... **$6.95**

THE CHEAP VIDEO COOKBOOK
by Donald E. Lancaster. Your complete guide to super low cost alphanumeric and graphic microprocessor-based video displays. 256 pages; 5½ x x8½; softbound.
SAM 21524 ..... **$5.95**

IC CONVERTER COOKBOOK
by Walter G. Jung. Written for the engineer, technician, hobbyist, or student, this book will be an invaluable working guide to the understanding and use of IC a/d and d/a converters. 576 pages; 5½ x 8½; softbound.
SAM 21527 ..... **$13.95**

BASIC PROGRAMMING PRIMER
by Mitchell Waite and Michael Pardee. Covers everything from getting organized to writing a game program. 240 pages; 5½ x 8½; softbound.
SAM 21586 ..... **$8.95**

THE S-100 AND OTHER MICRO BUSES
by Elmer C. Poe and James C. Goodwin. From discussing the basics of buses to examining in detail the various ways to convert different bus signals to S-100 signals, this guide covers it all. 144 pages; 5½ x 8½; softbound.
SAM 21587 ..... **$5.95**

MICROCOMPUTER INTERFACING WITH THE 8255 PPI CHIP
by Paul F. Goldsborough and Peter R. Rony. Introduces you to the Intel 8255 Programmable Peripheral Interface (PPI) through discussion and experiments. Tells what the 8255 is, where it fits in a microcomputer system, why it is used, and how it is used. 224 pages; 5½ x 8½; softbound.
SAM 21614 ..... **$8.95**

MICROCOMPUTER PRIMER (2nd Edition)
by Mitchell Waite and Michael Pardee. Describes the newest advances in microprocessor technology including information on VLSI chips, 16-bit micros, and new interface devices. 384 pages; 5½ x 8½; softbound.
SAM 21653 ..... **$11.95**

THE HOWARD W. SAMS CRASH COURSE IN MICROCOMPUTERS
by Louis E. Frenzel, Jr. Designed to meet the computer challenge fo the '80's, this course is arranged as a series of lessons in a unique self-teaching format. The programmed instruction text is a quick and effective way to learn the basics, numbers systems, memories, architecture, input/output devices, software programming, and applications. Written for the lay person as well as scientists, engineers, or technicians. 264 pages; 8½ x 11; wirebound.
SAM 21634 ..... **$17.50**

FUNDAMENTALS OF DIGITAL COMPUTERS (2nd Edition)
by Donald D. Spencer. Covers everything from computer hardware to the two most popular programming languages — BASIC and FORTRAN. 320 pages; 5½ x 8½; softbound.
SAM 21534 ..... **$9.95**

DBUG: AN 8080 INTERPRETIVE DEBUGGER
by Christopher A. Titus and Jonathan A. Titus. Describes the operation of a software debugging program for the 8080 and how it can be applied to program development and testing. 112 pages; 5½ x 8½; softbound.
SAM 21536 ..... **$4.95**

MICROCOMPUTER-ANALOG CONVERTER SOFTWARE AND HARDWARE INTERFACING
by Titus, Titus, Rony, and Larsen. Introduces you to the concepts and techniques of interfacing digital computers to analog devices. 288 pages; 5½ x 8½; softbound.
SAM 21540 ..... **$9.50**

8080/8085 SOFTWARE DESIGN, 2 Volumes
by Larsen, Rony, Titus & Titus. Volume 1 gives you an introduction to assembly language programming. 336 pages; 5½ x 8½; softbound.
SAM 21541 ..... **$9.50**
Volume 2 is a unique, one-of-a-kind computer science book for the design engineer. Written in Intel machine code. 352 pages; 5½ x 8½; softbound.
SAM 21615 ..... **$9.95**
Two-volume set, **SAM 21659** **$17.50**

INTERFACING AND SCIENTIFIC DATA COMMUNICATIONS EXPERIMENTS
by Rony, Larsen, Titus, and Titus. Tells you about the principles of transmitting data using the asynchronous-serial data transfer technique-the most universal interfacing standard available today. 160 pages; 5½ x 8½; softbound.
SAM 21546 ..... **$5.95**

INTRODUCTORY EXPERIMENTS IN DIGITAL ELECTRONICS AND 8080A MICROCOMPUTER PROGRAMMING AND INTERFACING, 2 Books
by Rony, Larsen, and Titus. Completely self-instructional texts. Book 1 covers Digital Codes, An Introduction to Programming, Some 8080 Microcomputer Instructions, Registers and Register Instructions and more. 496 pages; 5½ x 8½; softbound.
SAM 21550 ..... **$12.95**
Book 2 covers What is Interfacing, Device Select Pulses, The 8080A Distinctive Set, and more. 416 pages; 5½ x 8½; softbound.
SAM 21551 ..... **$10.95**
Two Volumes, **SAM 21552** **$20.95**

6502 SOFTWARE DESIGN
by Leo Scanlon. Explains the fundamentals of the popular 6502 integrated circuit currently being used in general purpose microcomputers, video games, and personal computers. 272 pages; 5½ x 8½; softbound.
SAM 21656 ..... **$10.50**

Z-80 MICROCOMPUTER DESIGN PROJECTS
by William Barden, Jr. Provides a solid introduction to the Z-80 and shows how to build a microcomputer called the EZ-80 around this remarkable chip. 208 pages; 8½ x 11; softbound.
SAM 21682 ..... **$12.95**

HOW TO PROGRAM AND INTERFACE THE 6800
by Andrew C. Staugaard, Jr. Provides an in-depth introduction to microprocessors/microcomputers in general with emphasis on the Motorola 6800 microprocessor family. Includes over 30 "hands-on" experiments that demonstrate "real-world" applications. 416 pages; 5½ x 8½; softbound.
SAM 21684 ..... **$13.95**

8085A COOKBOOK
by Christopher A. Titus and Jonathan A. Titus. Shows you how to design a microprocessor using the 8085A microprocessor chip with designs for several completely operational microprocessors. 352 pages; 5½ x 8½; softbound.
SAM 21697 ..... **$12.95**

COMPUTER GRAPHICS PRIMER
by Mitchell Waite. Three carefully illustrated chapters explain perspectives, basic concepts, and graphics programming in this newest computer development that permits the creation of complex drawings, plans, maps, and schematics on the screen of a television set. 184 pages; 5½ x 8½; softbound.
SAM 21650 ..... **$12.95**

PROGRAMMING & INTERFACING THE 6502, WITH EXPERIMENTS
by Marvin L. De Jong. A compilation of information and programs that will be useful to anyone interested in using 6502-based microcomputer systems. 416 pages; 5½ x 8½; softbound. **SAM 21651** **$13.95**

TV TYPEWRITER COOKBOOK
by Donald E. Lancaster. Gives you an in-depth coverage of typewriters (tvt's) — the only truly low-cost microcomputer and small-systems display interface. 256 pages; 5½ x 8½; softbound.
SAM 21313 ..... **$9.95**

THE 8080A BUGBOOK® MICROCOMPUTER INTERFACING AND PROGRAMMING
by Rony, Larsen, and Titus. Gives you the principles, concepts, and applications of an 8-bit microcomputer based on the 8080 microprocessor IC chip. 416 pages; 5½ x 8½; softbound.
SAM 21447 ..... **$10.50**
(BUGBOOK® is a registered trademark of E & L Instruments, Inc., Derby Connecticut 06418.)

HOW TO PROGRAM MICROCOMPUTERS
by William Barden, Jr. A popular, complete guide to assembly language programming of the Intel 8080, Motorola MC6800, and MOS Technology MCS 6502 Microprocessors. 256 pages; 5½ x 8½; softbound.
SAM 21459 ..... **$8.95**

Z-80 MICROPROCESSOR PROGRAMMING & INTERFACING — Books 1 & 2
by Elizabeth A. Nichols, Joseph C. Nichols, and Peter R. Rony. Two volumes of laboratory-oriented text. Book 1 explores Z-80 software and machine language programming. Book 2 addresses Interfacing digital circuits with the Z-80 CPU, PIO, and CTC chips. Both books stress learning through experimentation.
Book 1; 304 pages; 5½ x 8½; softbound.
SAM 21609 ..... **$10.95**
Book 2; 496 pages; 5½ x 8½; softbound.
SAM 21610 ..... **$12.95**
Two Volumes, **SAM 21611** **$21.95**

TEA: AN 8080/8085 CO-RESIDENT EDITOR/ASSEMBLER
by Christopher A. Titus. Deals with an assembly language program and provides a detailed explanation so that the reader can effectively use the program presented to prepare assembly language programs. Includes a complete assembled listing of the program to be used on the 8080-based microcomputer. 256 pages; 5½ x 8½; softbound.
SAM 21628 ..... **$8.95**

 PLEASE ORDER BY PART NUMBER

PRIORITY ONE ELECTRONICS

VISA

master charge THE INTERBANK CARD

ORDERING INFORMATION

- **BY PHONE: (800) 423-5633, (213) 894-8171**
- **BY MAIL: 16723C Roscoe Blvd., Sepulveda, CA 91343**

MINIMUM ORDER

$15.00 IN MERCHANDISE on prepaid U.S. orders. Payment may be made by **check, money order, Mastercharge, VISA,** and by bank transfer. (Call for details.)

OPEN ACCOUNTS

U.S. ONLY, **$25.00 MINIMUM.** We gladly accept purchase orders from government, schools, and firms with a **published A1 rating from DUNN & BRADSTREET.** All orders are FOB Sepulveda, California. Freight charges will be prepaid and added to the invoice. An application for credit is available upon request. Please include payment with your initial order; credit applications take four weeks to process.

COD

We do not accept COD orders.

SALES TAX

Add 6% sales tax to all parts delivered in California. If the merchandise is for resale, you must include a signed standard resale permit card (not just a tax number) to qualify for exemption.

PHONE NUMBERS

ORDER DESK: To place an order from outside CA, AK, HI, Call:
(800) 423-5633

SALES DEPT: To place an order, inquire about product availability or to make a technical inquiry call:
(213) 894-8171

CUSTOMER SERVICE: To inquire about an order, your account, or a missing or damaged package call:
(213) 893-8202

LARGE QUANTITY QUOTATION OR BIDS

Priority 1 Electronics will quote on quantities in excess of the maximum amounts shown in the selection guide.

PRICES

Prices are net, FOB Sepulveda, California. Prices are subject to change without notice. Due to the wide fluctuations in the price of precious metals, we reserve the right to revise prices at the time of shipment, without notice, on items that contain gold or silver such as ICs, connectors, and wire. For up to the minute prices and for prices in excess of those shown, call PRIORITY 1 ELECTRONICS, (213) 894-8171, (800) 423-5633.

RETAIL STORE

Visit our retail showroom anytime Monday-Friday 9-6, Saturday 10-5. You can pick-up your parts and brouse through thousands of items, many available only at the retail store.

U.S. SHIPPING AND HANDLING

All orders under 50 lbs. are shipped via UPS insured unless otherwise specified. For orders shipped via mail (not recommended) all packages to the U.S., its possessions and territories and Canada, are insured to $200.00 **Minimum mail shipping and handling charge is $3.00** For insurance coverage above $200.00, consult your local postmaster for rates and fees. Orders over 50 lbs. will be shipped via motor freight collect. The weights listed in the product descriptions are approximate figures. To compute your shipping and handling charge, consult the table in the next column:

UPS SHIPPING CHARGES

Up to	Ground	Air	Up to	Ground	Air
1 lb.	$ 2.50	$ 3.00	26 lbs.	$10.45	$26.97
2 lbs.	$ 2.50	$ 3.09	27 lbs.	$10.80	$27.97
3 lbs.	$ 2.50	$ 4.07	28 lbs.	$11.17	$28.96
4 lbs.	$ 2.50	$ 5.07	29 lbs.	$11.53	$29.97
5 lbs.	$ 2.85	$ 6.06	30 lbs.	$11.90	$30.95
6 lbs.	$ 3.21	$ 7.07	31 lbs.	$12.25	$31.95
7 lbs.	$ 3.57	$ 8.06	32 lbs.	$12.61	$32.95
8 lbs.	$ 3.94	$ 9.05	33 lbs.	$12.98	$33.95
9 lbs.	$ 4.29	$10.05	34 lbs.	$13.34	$34.94
10 lbs.	$ 4.66	$11.04	35 lbs.	$13.70	$35.93
11 lbs.	$ 5.02	$12.04	36 lbs.	$14.06	$36.93
12 lbs.	$ 5.39	$13.04	37 lbs.	$14.43	$37.93
13 lbs.	$ 5.74	$14.03	38 lbs.	$14.78	$38.92
14 lbs.	$ 6.10	$15.03	39 lbs.	$15.15	$39.92
15 lbs.	$ 6.47	$16.02	40 lbs.	$15.51	$40.91
16 lbs.	$ 6.83	$17.02	41 lbs.	$15.87	$41.91
17 lbs.	$ 7.19	$18.02	42 lbs.	$16.23	$42.90
18 lbs.	$ 7.55	$19.01	43 lbs.	$16.59	$43.90
19 lbs.	$ 7.92	$20.00	44 lbs.	$16.96	$44.90
20 lbs.	$ 8.27	$21.00	45 lbs.	$17.31	$45.89
21 lbs.	$ 8.64	$22.00	46 lbs.	$17.68	$46.88
22 lbs.	$ 9.00	$23.00	47 lbs.	$18.04	$47.89
23 lbs.	$ 9.36	$23.98	48 lbs.	$18.40	$48.88
24 lbs.	$ 9.72	$24.99	49 lbs.	$18.76	$49.88
25 lbs.	$10.08	$25.98	50 lbs.	$19.12	$50.86

These rates are subject to change with each UPS rate increase.

FOREIGN ORDERS

Minimum $25.00 must be PREPAID in one of the following three ways:

1) Mastercharge, VISA, and their affiliated cards. (Don't forget the expiration date.)

2) A MAGNETICALLY ENCODED BANK CHECK or MONEY ORDER payable in U.S. dollars through a U.S. bank. If an uncoded check or money order is sent, a 5.00 Collection Fee must be included. An unencoded check will also delay processing of your order for a minimum of four to six weeks.

3) Bank Transfer. Call or write for details.

NO OTHER METHOD OF PAYMENT IS ACCEPTABLE.

Letters of credit and purchase orders from outside the U.S. will not be accepted.

Foreign orders may be sent via Emery Air Freight Collect or via Airmail. All mail packages to Canada are insured for up to $200.00. All other foreign mail packages are not insured. If you desire insurance, please specify Emery. Where postal size and weight restrictions make it impossible, or postal costs make it impractical, we reserve the right to ship any package via Emery Air Freight Collect. (Any prepaid postage collected would be refunded.)

For foreign postal charges, consult the table below:

REGION	First pound	Each additional pound or fraction there of
Africa	$6.50	$5.00
Asia	$6.40	$5.00
Australia	$6.25	$4.84
Central America & Caribbean	$3.85	$1.85
Europe	$4.50	$2.90
Middle East	$5.70	$3.70
South America	$5.25	$3.25

*Canada & Mexico — Same as U.S. Air.

These rates are subject to change with each USPS rate increase.

WARRANTY

Since the Seller, PRIORITY 1 ELECTRONICS, does not control the use of its products, there are no express warranties which extend beyond the description of the face hereof. Seller disclaims any implied warranties of merchantability or of fitness for any particular purpose. Since Seller cannot control the manner or use of its products after their sale, Seller shall not be responsible for any consequential or indirect damages. Since Seller is only acting as a distributor of products manufactured by other companies, Seller expressly limits its liabilities to any guarantees extended by the manufacturer, which guarantees seller will pass through to the customer. Seller will at its option, either replace the goods sold or refund the purchase price.

CLAIMS AND RETURNS

Inspect all shipments immediately upon receipt. Missing cartons or obvious damage to cartons should be noted on the delivery receipt before signing. Concealed damage or loss should be reported at once to the carrier and an inspection requested. All claims for shortage or damage must be made within five days after receipt of shipment. Claims for lost shipments must be made within 15 days of receipt of invoice or other notification of shipment. You must save damage or pilfered cartons until claim is settled. No goods may be returned or exchanged without a Return Merchandise Authorization. Goods returned without an RMA number and/or not prepaid will be refused, which may result in additional delay, risk and expense to the customer. An RMA number may be received in writing or calling the PRIORITY 1 ELECTRONICS Customer Service Department, Monday thru Friday, 9 a.m.-12 p.m., 1 p.m.-4:30 p.m. at (213) 893-8202. If authorized, goods returned which are the result of customer error will be subject to a minimum of $15.00 or 15%, whichever is greater, restocking charge.

PRIORITY 1 ELECTRONICS assumes no responsibility for any errors that may occur in this selection guide. Any product recommendation is not binding and shall not eliminate customer responsibility to check the suitability of the products we sell for their particular application. ABSOLUTELY NO ADJUSTMENT CAN BE MADE ON PARTIALLY ASSEMBLED KITS.

© 1980 Priority 1 Electronics. All rights reserved, no part shall be reproduced without written permission from Priority 1 Electronics.

Special thanks to all our friends in the industry who have helped to make us number 1 ONE

Ditto, Larry, PA & MA, Terry, Tom & Dave, Scott & Gregg, John, Ray, Willis & Fred, Steve and one guy who tried, Jim Nelson.

ORDER TOLL FREE (800) 423-5633

CA, AK, HI (213) 894-8171 • OUTSIDE CA (800) 423-5633

16723C ROSCOE BLVD., SEPULVEDA, CA 91343

CUSTOMER NUMBER
THIS IS THE NUMBER THAT APPEARS DIRECTLY ABOVE YOUR NAME ON PREVIOUS ORDERS.

PRIORITY ONE ELECTRONICS ©

PLEASE TYPE OR PRINT - DO NOT WRITE IN SHADED AREAS.

ORDER NUMBER

SOLD TO _____

SHIP TO _____

*On Credit Card Orders this must be the EXACT name as it appears on card and the address where the Bank mails your monthly statement.

**IF SAME AS "SOLD TO", WRITE "SAME".

PURCHASE ORDER #	SHIP VIA ☐UPS ☐UPS BLUE (AIR) ☐EMERY AIR COL. ☐OTHER_____	FOB Sepul	TERMS ☐Check No._____Enclosed ☐VISA ☐MASTERCHARGE ☐Company P.O. Attached	☐TAXABLE ☐EXEMPT
☐VISA ☐M.C.	CARD #		EXPIRES	AUTH/PPD AMT
DATE	DAY PHONE ( ) EXT.		NGT ( ) EXT.	SIGNATURE

	QTY. ORDERED			PART NUMBER	DESCRIPTION	WEIGHT	UNIT PRICE	AMOUNT
1.								
2.								
3.								
4.								
5.								
6.								
7.								
8.								
9.								
10.								
11.								
12.								
13.								
14.								
15.								

ORDER BY PART NUMBERS EXACTLY AS SHOWN IN SELECTION GUIDE

☐CHECK HERE IF YOU HAVE MOVED SINCE YOUR LAST ORDER.

☐CHECK HERE IF THIS IS YOUR FIRST ORDER FROM US.

☐SEND CATALOG

NOTES & SPECIAL INSTRUCTIONS

COMMENTS

DATE SHIPPED	INVOICE #	EB	CR. CK. AMT.
P.O. NOS.	PB / LOC.	D&B.	

TOTAL WEIGHT

Sub-Total (minimum $15.00)

6% Sales Tax (Calif. Only)

Shipping (consult table on reverse) (Minimum $2.50)

TOTAL $

BE SURE TO READ THE ORDERING INFORMATION ON THE REVERSE SIDE.

DMM+VARI-PITCH+LOGI-TRAK=MX 333

World's fastest troubleshooter

A DMM SO UNIQUE...SO VERSATILE... SO SUPERIOR WE WERE TEMPTED TO CALL IT SOMETHING ELSE

We believe the MX333, with the VARI-PITCH™ and LOGI-TRAK™ functions, to be the greatest time saving tool in electronics today. It has all the functions, ranges and accuracy you expect from the best along with the two additional features which will save enormous amounts of troubleshooting time. And the MX333's 20Ω range gives you 10 milliohm resolution for those critical low resistance tests. Both MX series DMM's have 0.1% basic accuracy plus a 10A range, plus the intelligent case styling that has the size of a hand held, but the shape of a better idea. With either unit you get more performance per dollar than with competitive models. And the MX333 gives you more, much more, than you ever thought possible! *Effort cutting innovations that will save you hours by the second!*



EXCLUSIVE VARI-PITCH

Not just a beep...not just instant ohms. MX333's VARI-PITCH audible tone changes frequency proportionate to the reading so you can literally troubleshoot by ear! The higher the pitch, the higher the reading. No need to take your eyes off the probe or wait for a readout to settle. VARI-PITCH responds instantly, proportionally and accurately in all voltage, current, resistance and diode test ranges. It even provides analog-like audible response to variations for quick and easy adjustments and nulling.

FAST LOGI-TRAK (5 nsec fast)

Combines the features of a high performance logic probe and voltmeter in one convenient function. Use any standard 10:1 high frequency scope probe to find high and low logic levels and positive or negative pulses as narrow as 5 nsec without taking your eyes off the circuit! The VARI-PITCH output tells it all. *And,* unlike ordinary logic probes, LOGI-TRAK spots ground shorts, supply shorts, opens, marginal or ambiguous logic states and infrequent pulses instantly! Then, without changing anything but the direction of your glance, it's easy to verify actual voltage on the digital readout!

NEW UNIVERSAL SIZE AND SHAPE

MX333 and MX331 are the first digital multimeters designed from the gound up for LCD technology. The display's 45° angle is easy to read at any viewing point; from directly above to straight on. Powered by a single 9 volt battery, their compact size and unique shape make than ideal for all portable applications.

No matter how you use a multimeter; in your hand, clipped to your belt or on a shelf, no other DMM is as convenient as the Hickok MX333 or MX331! And, with VARI-PITCH, MX333 is *really out of sight* in performance.

CONDENSED SPECIFICATIONS: MX331 and MX333

DC VOLTS (5 RANGES): 220mV to 1000V full scale, RESOLUTION: 0.1mV, ACCURACY: ±0.1% + 1 digit, INPUT IMPEDANCE: 10MΩ. OVERLOAD PROTECTION: 1000V DC or peak AC + up to 6kV transients all ranges.

AC VOLTS (5 RANGES): 200mV to 1000V full scale, RESOLUTION: 0.1mV, ACCURACY: ±1% + 2 digits, 45 Hz to 1kHz, ±5% + 5 digits to 5kHz, INPUT IMPEDANCE: 10MΩ, OVERLOAD PROTECTION: 1000V DC/750 RMS.

RESISTANCE (7 RANGES): 20Ω to 20MΩ full scale except no 20Ω range on MX331, RESOLUTION: 0.01Ω on MX333, 0.1Ω on MX331, ACCURACY: 0.1% + 1 digit except 0.2% on 200Ω, 1% on 20MΩ, and 3% on 20Ω ranges. OVERLOAD PROTECTION: 500V DC on RMS all ranges plus 2A fuse on 20Ω range. TEST VOLTAGE: Low power, 0.25V max of full scale.

DIODE TEST (1 RANGE): Measures forward voltage drop across diode and transistor junctions at 2mA nominal current.

AC/DC CURRENT (5 RANGES): 2mA to 10A full scale, RESOLUTION: 1μA, ACCURACY: ±1.2% + 1 digit DC, ±2.5% + 1 digit AC, OVERLOAD PROTECTION: 250V @ 2A all ranges except 10A, max 15A on 10A range.

GENERAL: Dimensions: 2.2 x 6.7 x 6 in. (5.6 x 17 x 15.2 cm); Weight: 22 oz. (.7kg); Power: 9V battery (incl.) or Hickok AC adapter; Battery Life; 200 Hrs. typical; Temperature: 0-50°C operating, -35 to +60°C storage. INCLUDES: Deluxe safety test leads, battery, manual and belt clip.

HIC-MX331	DMM	$179.00
HIC-MX333	DMM w/VARI-PITCH of LOGI-TRAK	235.00
HIC-SP+7	10:1 Probe for LOGI-TRAK	33.50
HIC-CC+4	Carrying Case	15.00
HIC-RC+3	AC Adapter	8.00
HIC-VD+14	RF Probe	33.50

HICKOK

We see the S-100 a little differently.


WE SEE THE S-100 AS AN INDUSTRY STANDARD.

Systems builders who value performance, price, reliability and IEEE compatibility are getting some good news from CCS.

The IEEE-certified S-100 is a real bus, for a very real, very dynamic industry.


And CCS S-100 components deliver industrial quality at industrial, mass-produced prices. High performance plus full IEEE compatibility.


There is no greater value for the quality conscious system designer. On any bus. From any manufacturer.



2422 Disk Controller. Single *and* double density controller for up to four 5¼" or 8" single-sided drives, or two double-sided drives. Shipped with CP/M 2.2, the controller reads and writes IBM-standard single density. Automatically determines disk density — single or double. Supports PerSci auto eject, plus fast-seek for voice coil systems.

2016 16K Static RAM. Fully buffered board features 2114 static RAMs for +5v operation. Bank select available by bank port or bank byte, for system expansion beyond 64K. Addressable in 4K blocks at 4K boundaries. LED indicators for board selection and bank selection. Available in 200, 300, or 450 nsec versions. All versions support 4MHz operation with no wait states.






2810 Z80 CPU Board. Capable CPU for S-100 Systems operates at 2 or 4MHz, is fully Altair/Imsai compatible. Z-80 monitor is available separately. Includes auto addressing to 4K boundaries, plus a serial port for serial devices, including terminals and printers. Supports both front-panel operation and power-on memory jump, plus wait-state generation for slower memories. Compatible with proposed IEEE S-100 standards.


2032A 32K Static RAM. Fast static memory operates without wait states at a full 4MHz. Supports full and partial bank select, for expansion beyond 64K. Addressable in 8K blocks at 8K boundaries. Address and data lines are fully buffered, and there are no DMA restrictions.



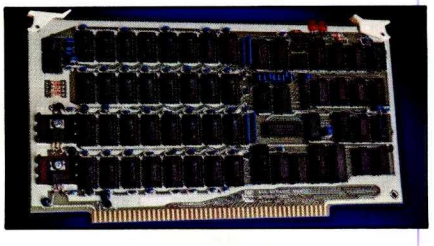

2065 64K Dynamic RAM. Transparent refresh with fail-safe extended wait state capability. 250ns access time, for 4MHz operation with no wait states. Bank select (fully Cromemco compatible) for systems of up to 512K. And any 16K block can be independently addressed.

2200A Mainframe. Rock solid, heavy gauge cabinet includes 12-slot, actively terminated S-100 motherboard, fan, and power supply. Power supply features 105, 115, or 125 volt AC input power; provides +8vDC at 20 amps, ±16vDC at 4 amps. Includes convenient, front mounted, lighted reset switch.

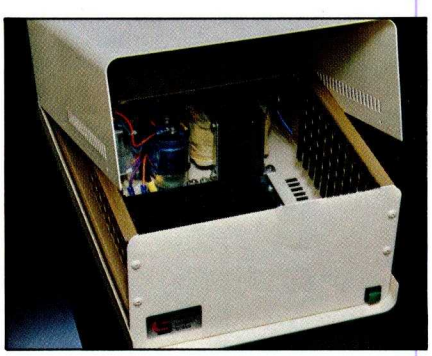

California Computer Systems

FROM PRIORITY ONE ELECTRONICS©

The first personal computer for under $200.



The Sinclair ZX80. A complete computer—only $199.95 *plus $5.00 shipping.*

Now, for just $199.95, you can get a complete, powerful, full-function computer, matching or surpassing other personal computers costing several times more.

It's the Sinclair ZX80, the computer that independent tests prove is faster than all previous personal computers. The computer that "Personal Computer World" gave 5 stars for 'excellent value.'

The ZX80 cuts away computer jargon and mystique. It takes you straight into BASIC, the most common, easy-to-use computer language.

You simply take it out of the box, connect it to your TV, and turn it on. And if you want, you can use an ordinary cassette recorder to store programs. With the manual in your hand, you'll be running programs in an hour. Within a week, you'll be writing complex programs with confidence.

All for under $200.

Sophisticated design makes the ZX80 easy to learn, easy to use.

We've packed the conventional computer onto fewer, more powerful LSI chips—including the Z80A microprocessor, the faster version of the famous Z80. This makes the ZX80 the world's first truly portable computer (6½" x 8½" x 1½" and a mere 12 oz.). The ZX80 also features a touch sensitive, wipe-clean keyboard and a 32-character by 24-line display.

Yet, with all this power, the ZX80 is easy to use, even for beginners.



Your course in computing.

The ZX80 comes complete with its own 128-page guide to computing. The manual is perfect for both novice and expert. For every chapter of theory, there's a chapter of practice. So you learn by doing—not just by reading. It makes learning easy, exciting and enjoyable.

The ZX80's advanced design features.

Sinclair's 4K integer BASIC has performance features you'd expect only on much larger and more expensive computers. These include:

- Unique 'one touch' entry. Key words (RUN, PRINT, LIST, etc.) have their own single-key entry and are stored as a single character to reduce typing and save memory space.
- Automatic error detection. A cursor identifies errors immediately to prevent entering programs with faults.
- Powerful text editing facilities.
- Also programmable in machine code.
- Excellent string handling capability—up to 26 string variables of any length.
- Graphics, with 22 standard symbols.
- Built-in random number generator for games and simulations.

Sinclair's BASIC places no arbitrary restrictions on you—with many other flexible features, such as variable names of any length.

And the computer that can do so much for you now will do even more in the future. Options will include expansion of 1K user memory to 16K, a plug-in 8K floating-point BASIC chip, applications software, and other peripherals.


Order your ZX80 now!

The ZX80 is available only by mail from Sinclair, a leading manufacturer of consumer electronics worldwide. We've already sold tens of thousands of units in Europe, so demand will be great.

To order by mail, use the coupon below. But for fastest delivery, order by phone and charge to your Master Charge or VISA. The ZX80 is backed by a 30-day money-back guarantee, a 90-day limited warranty with a national service-by-mail facility, and extended service contracts are available for a minimal charge.

Price includes TV and cassette connectors, AC adaptor, and 128-page manual.

All you need to use your ZX80 is a standard TV (color or black and white). The ZX80 comes complete with connectors that easily hook up to the antenna terminals of your TV. Also included is a connector for a portable cassette recorder, if you choose to store programs. (You use an ordinary blank cassette.)

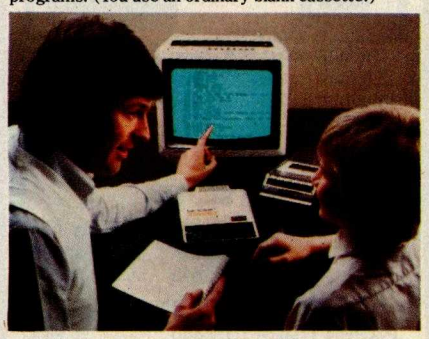

The ZX80 is a family learning aid. Children 10 and above will quickly understand the principles of computing—and have fun learning.

Phone orders only: (203) 265-9171. We'll refund the cost of your call.
Information: General and technical—(617) 367-1988, 367-1909, 367-1898, 367-2555. Phones open Monday-Friday from 8 AM to 8 PM EST.

sinclair

Sinclair Research Ltd., 475 Main St., P.O. Box 3027, Wallingford, CT 06492.

BY-11-0

To: **Sinclair Research Ltd., 475 Main St., P.O. Box 3027, Wallingford, CT 06492.**

Please send me _____ ZX80 personal computer(s) at $199.95* each (US dollars), plus $5 shipping. (Your ZX80 may be tax deductible.)
I enclose a check/money order payable to Sinclair Research Ltd. for $_____.

Name _____

Address _____

City _____ State _____ Zip _____

Occupation: _____ Age: _____


Intended use of ZX80: _____

Have you ever used a computer? ☐ Yes ☐ No.
Do you own another personal computer? ☐ Yes ☐ No. *For Conn. deliveries, add sales tax.


Circle 49 on inquiry card.

Buy By Mail and Save!

COMPUTERS

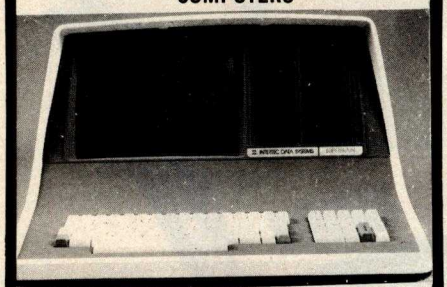

INTERTEC SuperBrain® 32K . **$2495**
64K RAM, List $3345 ..... **$2695**
64K Quad, List $3995 ..... **$3395**
NORTH STAR Horizon I®
16K D.D. Kit **$1259**
32K D.D. Kit **$1579**
32K Assembled, List $2695 .... **$2149**
Horizon 2 32K DD, Assm., $3095 **$2439**
32K QD, Assm., List $3595 .... **$2859**



CROMEMCO Z-2, List $995 ... **$ 829**
System 2, 64K, List $3990 ..... **$3179**
System 3, 64K, List $6990 ..... **$5479**
ATARI® 400, List $630 ..... **$ 489**
800, List $1080 ..... **$ 839**
TI-99/4, List $1150 ..... **$ 985**

DISK SYSTEMS

THINKER TOYS® Discus 2D . **$ 939**
Dual Discus 2D **$1559**
Discus 2+2, List $1549 ..... **$1288**

PRINTERS & TERMINALS

PAPER TIGER IDS-440 ..... **$ 849**
with Graphics Option ..... **$ 949**
CENTRONICS 730-1, List $995 . **$ 639**
737, List $995 ..... **$ 849**
T.I. 810 ..... **$1575**
INTERTUBE II, List $995 ..... **$ 729**
PERKIN-ELMER Bantam 550 .. **$ 789**
TELEVIDEO 912C **$779**
920C ..... **$ 839**
HAZELTINE 1420 ..... **$ 839**
1500 ..... **$ 879**
SOROC 120 ..... **$ 745**

FLOPPY DISKS SPECIAL
5¼" Box of 10 **ONLY $29.95**
(specify TRS-80, North Star, SuperBrain, etc.)

Most items in stock for immediate delivery. Factory sealed cartons, w/full factory warranty. NYS residents add appropriate sales tax. Prices do not include shipping. VISA and Master Charge add 3%. C.O.D. orders require 25% deposit. Prices subject to change without notice.

Computers Wholesale

P.O. Box 144 Camillus, NY 13031
VISA **(315) 472-2582** master charge

loads all parameters for the color memories at the indexed color code of 2. The hue, intensity, and saturation are loaded at this address with the data 5, 7, and 2, respectively.

In order to exploit the full capabilities of the frame buffer, we must have some method to access individual elements of the buffer. And we must have the capability of loading all or portions of the frame buffer in order to support selective filling and erasing. If we do not provide this function, it becomes very difficult to produce solid colored or shaded images, which is one of the important advantages of a raster-scan display. Furthermore, if we allow the host to directly load individual elements of the frame buffer, we can produce a full frame that implements algorithms such as *depth queuing* and *shading* that cannot be performed otherwise by the display processor at the pixel level. Thus it is apparent that we do need some sort of load-pixel primitive. In order to increase the utility of this primitive, however, we must introduce the concept of the *viewport*.

Through the graphics-display registers, we can define a rectangular area on the display by a pair of X,Y coordinates (the left and right X boundary and the top and bottom Y boundary). Thus, rather than loading the full screen, we can reference the area bounded by a viewport. This feature permits us to load areas of the display or even to mask portions of the display. To further increase the generality of this primitive, we must also permit loading a single pixel. This feature allows us to change the color of the point we are currently at. We could do the same with the MOV primitive, but this instruction would be shorter. Finally, we can define our load-pixel primitive as:

LPIX R,C_0..C_n

where:

R = reference (*F*ull frame, *V*iewport, or *X*,*Y*)
C_i = color data

Along with this primitive, we must add that a predefined order of filling the pixels must be maintained, such as left to right, bottom to top. For example, the primitive:

LPIX F,0,0,0,0...

loads the entire display with a single color 0.

The next primitives we need do not actually produce an image, but support the previous primitives. First, since we have assumed the existence of graphics-display registers, we must allow the host to load the registers with a value. In this work, we do not specify the types or numbers of graphics-display registers, since they may vary from system to system. However, certain registers will be consistent, such as vector type and current X and Y position. Mnemonically, our load-register primitive can be represented as:

LREG, N,V

where:

N = register name or number
V = value to be loaded

For example, the primitive:

LREG X,4096

loads the X register with the value 4096.

Since some of these registers contain status information, it is important that the host be able to read back the value in the register. For example, if the display processor supports a light pen, it may be necessary for the host to read back the X and Y position coordinates. Mnemonically, our read-register-primitive can be represented as:

RREG N

where:

N = register name or number

For example, the primitive:

RREG Y

reads the contents of the Y register and returns the value to the host.

Since we have assumed the existence of subroutines, there must be some way of loading subroutines in the display-processor memory: thus we need a load-subroutine primitive. We obviously need the parameters of

Text continued on page 276

Circle 50 on inquiry card. →

WordPro™
Word Processing Software

Turn your Commodore CBM/PET computer into a highly sophisticated word processing system

Everyone expected it would happen sooner or later. . . with WordPro it already has! Now all the marvelous benefits of an advanced stand-alone wordprocessor are available with the WordPro series of software and the systems they create.

If you've already been shopping for software in the crowded word-processing marketplace, you've probably determined the features you really want. You'll find WordPro has them, and more.

And if you haven't begun to shop yet, we urge you to compare, because only by comparison will you fully appreciate how complete and sophisticated WordPro software really is.

WORDPRO GIVES YOU THREE LEVELS TO CHOOSE FROM



WORDPRO SOFTWARE IS LOADED WITH THE LATEST INNOVATIONS

Sophisticated systems programmed with leading edge wordprocessing features, WordPro is a series of programs designed specifically for use with the Commodore CBM/PET computers, peripherals and compatible typewriter quality printers.

WHAT MAKES WORDPRO THE BEST?

Our research has shown that while many wordprocessing packages have comparable features to WordPro, none can surpass Wordpro's EASE OF USE AND FLEXIBILITY. Wordpro operators need not be familiar with computer commands or functions. WordPro is easy to learn for anyone with ordinary typing skills.



WORDPRO 1 is ideal for hobbyists, students and organizations who can benefit from the advantages of a basic wordprocessor without the program refinements of a comercially oriented system. WordPro 1 is recommended for use with the CBM/PET 8/16K, C2N cassette and interfaced printer.



WORDPRO 3 converts the CBM/2001 32K computer into a highly sophisticated 40-column screen wordprocessor. This program incorporates the advanced features considered important to effective wordprocessing, including nearly every entering, editing, memory and printing feature available today. WordPro 3 is recommended for use with CBM/PET 32K (40-column) computer, CBM Dual Disk Drive, and a properly interfaced printer.

WORDPRO 4 has it all! With this program, you will have everything you could want from a wordprocessor. . . and then some. WordPro 4 includes every feature found on WordPro 3, but with the added advantage of an 80-column display screen. The 80-column display simplifies text editing and makes entering text in columnar formats effortless. And with a few simple keystrokes, you'll be able to visualize on the screen exactly how your document will look prior to printing it out. WordPro 4 is designed for use with the Commodore CBM 8032 computer, CBM Dual Disk Drives, and a properly interfaced printer.

Professional Software Inc.

166 Crescent Rd., Needham, MA 02194

(617) 444-5224

WordPro Dealer Inquires Invited

WordPro was developed by Steve Punter of Pro-Micro Software Ltd., and is marketed exclusively by Professional Software Inc.

WordPro is a registered trademark of Professional Software Inc. CBM is a registered trademark of Commodore Business Machines.

SUPER

Now With Multi-Key Capabilities For Apple & Pet

Since KRAM™ was introduced in 1979 it has fast become known as the users. Now, after hundreds of requests we have added MULTI-KEY,

IBM/370 users have VSAM (Virtual Storage Access Method) to provide fast, flexible keyed-access to their data. Now SUPER KRAM (Keyed Random Access Method), from United Software of America, gives Apple and Pet users the same flexibility, substantially increasing the processing power of the Apple and Pet.

Until SUPER KRAM the only "random access" capability in the Apple and Pet consisted of a crude form of "relative record" processing. While this is usable for very simple applications, it falls far short of the needs of today's business and analytical applications. Using SUPER KRAM records may be processed by any one of multiple "Key" values, which may consist of any kind of data: numbers, letters, special characters, etc. Even Apples's long-awaited DOS 3.3 doesn't have anything like this!!

KRAM™ 2.0 Regular Features


- Written in 6502 machine code Basic compatible
- Create/Open a dataset
- Put record by key
- Add & delete records by key
- Get any record by Full/Partial key
- Access by any key in as little as .2 sec. (.1 sec. with Corvus disk)
- Supports multiple disks
- Read next or previous record
- Dynamic space allocation
- Dynamic space reclamation
- Dynamic index compression
- Files never need reorganization
- Compatible with language systems

KRAM™ 2.0 Only $99.95

APPLE / ATARI

"Precise, humanized, well documented an excellent value" are the applauds being given

3-D ANIMATED COLOR GRAPHICS



Written in machine code.

APPLE WORLD by Paul Lutus

The Program made famous on National TV!

APPLE WORLD turns your Apple into a sophisticated graphics system capable of creating animated three-dimensional color images, projecting them in true perspective on the screen, rotate them, move them closer, further away, and many other exciting and imaginative things.

Draws objects with 65,000 points per side.

A powerful screen-oriented text editor is included to facilitate image formation. This program was recently featured on Tom Snyder's Prime Time Saturday TV Show and is now available for sale.

APPLE WORLD'S powerful editor is so easy to use that children will love it. You can now "sketch" your dream house, boat, car, or fantasy empire. Then view it as it would be seen from 10,000 feet, or you can ZOOM in until the screen is filled with a doorknob. You could then go inside and move from room to room examining furniture placement as your screen rotates within the room. Images or specific parts of images can easily be saved to disk or printer.

Does all this sound like science fiction? You won't think so after you have visited **Apple World.**

Introductory Price $59.95

36 page manual included

For 48K Apple II or Plus with Disk

Look for the RED-WHITE-BLUE United Software Display at your local computer dealer, or send check or moneyorder, plus $3.00 shipping to:

USA ***UNITED SOFTWARE OF AMERICA***

750 3RD Avenue,
New York NY 10017
(212) 682-0347 ***Telex 640055***

DEALER INQUIRIES INVITED

KRAM is a trade mark of United Software of America.

KRAM™

By Ken Germann

You've Asked For It, Now You Got It!

quickest and most powerful access method for serious Apple and Pet MULTI-INDEX, functions, as well as increasing processing speed.

SUPER KRAM'S™ Added Features

- MULTIKEY SUPPORT — Allowing simultaneous access to a KRAM file by more than one key field.
- HI-SPEED READ — This feature allows increased I/O speed up to 60% faster during processing of SUPER KRAM read next, read previous, put and delete requests.
- IMPROVED INDEX ARCHITECTURE — Allowing faster index searchers and more efficient disk space utilization.
- INTEGRATED BASIC COMMANDS — Allowing SUPER KRAM™ commands to be coded in-line with Basic, providing easier usage of KRAM than ever before.
- USER-SPECIFIABLE BUFFER POOL — Allowing the user to specify how many KRAM files are allowed open at one time; will support any number of KRAM files.
- LOGICAL RECORDS (KEYS MAY BE NON-UNIQUE) — Records added to the KRAM files are immediately accessible by any of the defined keys for the file (Automatic Upgrade).
- KRAM 2.0 files are totally compatible with SUPER KRAM

Requirements

Apple & Pet requirements - KRAM 2.0 and SUPER KRAM are designed to work with both Apple II's, Disk II, and Corvus Systems 10 Megabyte Winchester Disk, and Commodore's 2040, 3040, and 8050 Disk units. KRAM 2.0 and SUPER KRAM require 32K/48K Apple and a least on disk drive. (KRAM 2.0 requires Integer Basic in ROM). KRAM and SUPER KRAM work on any 40/80 column 16K/32K Pet.


SUPER KRAM™ Only $175

BREAKTHROUGHS

these sophisticated programs designed to meet the stringent needs of individuals and business professionals.

NEW 3-D SUPERGRAPHICS

& 3-D GAME DEVELOPMENT SYSTEM IN COLOR



by Paul Lutus

Watch colorful butterflys, birds, fly across your Apple or Atari screen with true 3 dimensional perspective. Have rocket ships fly out at you in this incredible high speed graphics package. 3-D SUPERGRAPHICS™ is a 6502 machine language program that will interface to your Basic or machine language programs or games using simple "DOS-like" commands.

Features include:

- Simple image entry through editor
- Objects up to 256 points per side
- Uses all hi-res colors
- Allows mixed colored text & graphics for prompts and captions
- Translates on 3 axes
- Individual axis scales
- 21 different commands
- Rotate object by 1.4° to 360° increments at machine speeds

For 48K Apple II or Plus with Disk II $39.95 for disk

For ATARI 800 with 40K memory (disk optional) $39.95 for tape

FOR COMMODORE 16K/32K COMPUTERS

DATABASE MANAGEMENT SYSTEM — A comprehensive, interactive system like those run on mainframes! Six modules comprising 42K of programming allow you to; create, edit, delete, display, print, sort, merge, etc., etc. - databases of up to 10,000 records. Printer routines automatically generate reports and labels on demand. **60** pages of concise documentation are included. Requirements - 16-32K PET and 2040 Dual Disk (printer optional) ..... **COST $125**

OTHER SOFTWARE

APPLE COMPUTERS

Super Space Wars	$ 9.95
States & Capitals	9.95
Moving Point Average	19.95
Stock Options	24.95
Finance	12.95
Bonds	12.95

COMMODORE PET

Stock Options	24.95
Finance	12.95
Bonds	12.95
Stock Analyzer	22.95
Mortgage	14.95
Space Intruders ("Best Game of 1979")	$19.95
Jury/Hostage	9.95
Kentucky Derby/Roulette	9.95
Alien I.Q./Tank	9.95
Tunnelvision/Maze Chase	14.95
Submarine Attack	9.95
Battle of Midway	7.95
Laser Tank Battle	9.95
Swarm	14.95
Baseball	9.95
Super Startrek	14.95
PET Music Box	29.95

A Line-Failure Indicator

Hank Olson, POB 339, Menlo Park CA 94025

Have you ever come back from work looking forward to an evening of home computing, only to find that nothing works? The program that was almost debugged during previous evenings is gone?

While nothing short of nonvolatile memory will completely solve this problem, the simple line-failure indicator described here will alert you to problems that occurred while you were away. A simple glance at the three-color display of LEDs (light-emitting diodes) will at least let you know what you are in for. The indicators light as follows:

- green: power is on, no recent failures
- yellow: power has failed and returned
- red: power has been off for a short time
- none: power has been off for a long time

Having different colored LEDs seems best from a human-interface point of view, even though their voltage requirements differ somewhat.

The circuit of the line-status indicator is shown in figure 1. The basic power supply uses a common 6.3 V filament transformer and a bridge rectifier of four 1N4001 diodes. The primary is controlled by SW1, a double-pole switch which prevents the battery from discharging when the unit is off. This supply must provide the current to light one LED plus energize a small relay coil. This represents about 150 ohms, so the RC (resistor/capacitor) time constant of the power-supply filter is about 0.15 seconds. Therefore, if you return to find the yellow indicator on, you will know that there has been a line-voltage dropout of 0.3 seconds or longer.

Looking at figure 1, we see that the green LED is held on by SCR1. The SCR gate can only be triggered into conduction manually by means of SW2. Once this push-button switch (SW2) is (momentarily) closed, a pulse of current enters the gate of the SCR from the 0.1 μF capacitor; and the SCR goes into conduction. Since this SCR operates on DC, it will *stay* in conduction until the DC supply fails (meaning that there is an AC line dropout).

When the DC supply fails, the relay K1 is de-energized, closing the "normally closed" contacts and lighting the

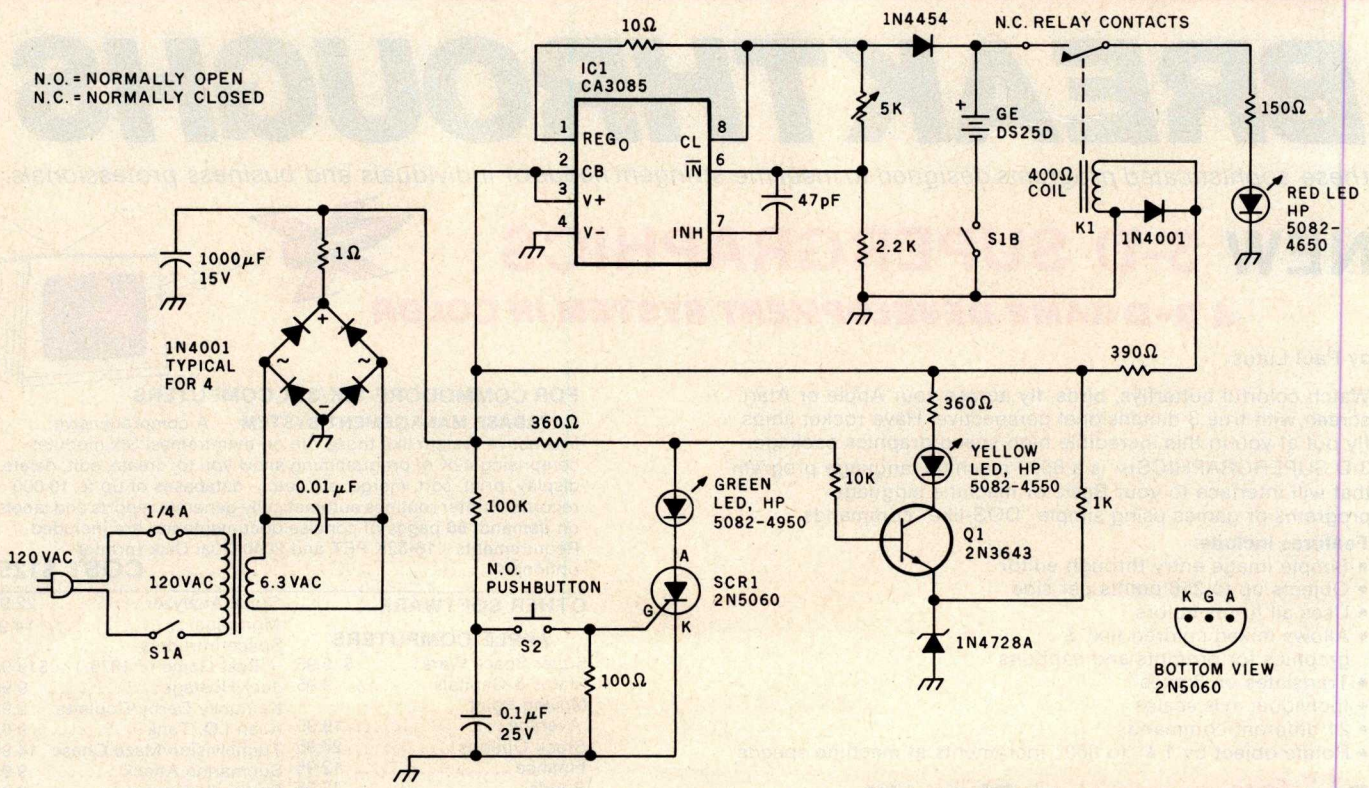


Figure 1: *This power-line-failure indicator uses a silicon-controlled rectifier to detect voltage dropouts. If power should fail for more than 0.3 seconds, the SCR ceases to conduct and the green LED is extinguished, while the red LED lights. The red LED remains on as long as power is out; its power is drawn from a set of rechargeable batteries. Should power return, the red LED goes out and the yellow one is illuminated to indicate this sequence of events.*



At $795*, how tough can these new Tigers be?

Introducing the new Paper Tiger™ 445 with the most rugged printing mechanism ever put in a low-cost matrix printer.

The 445 comes with a reliable ballistic-type print head and an advanced cartridge ribbon that lasts four times longer than many cassette or spool ribbons. Two separate heavy duty motors drive the print head and advance the paper. Plus you get true tractor paper feed.

And the new 445 gives you the performance you expect from the Paper Tiger family of printers. You can software-select character sizes, print 80- and 132-column formats, adjust paper width and length, even generate six-part business forms. All at unidirectional print speeds to 198 characters per second.

Need more stripes? Specify DotPlot™, a sophisticated raster graphics option.

If you've got an Apple**, TRS-80*** or other personal computer, get your paws on the tough new Paper Tiger™ 445 from IDS.

The people who invented low-cost matrix printing just growled.

Call TOLL FREE 800-258-1386 (in New Hampshire, Alaska and Hawaii, call 603-673-9100.)
Or write:
Integral Data Systems, Inc.,
Milford, New Hampshire
03055.




Paper Tiger 445

Integral Data Systems, Inc.

*Suggested U.S. retail price.
**Apple is a trademark of Apple Computer Inc.
***TRS-80 is a trademark of Radio Shack, a division of Tandy Corp.

Circle 51 on inquiry card.

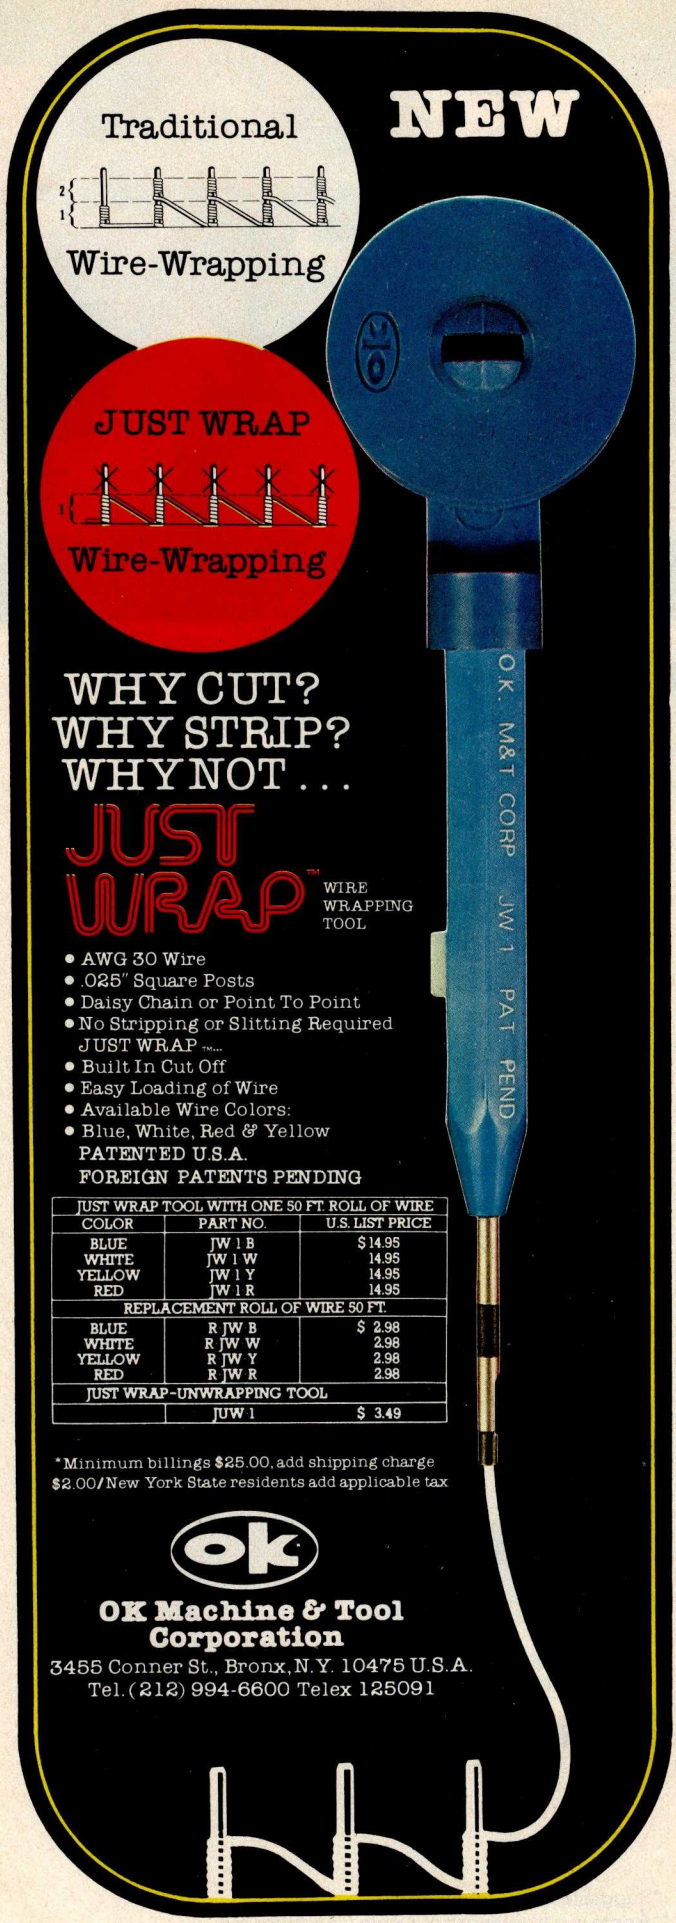

red LED. The 1N4454 serves to disconnect the two-cell nickel-cadmium (nicad) battery from U1 during power outages, so that the *only* load on the battery is the LED. Use of a relay to actuate the battery-to-LED circuit is the best method, because it closes the circuit with nearly zero resistance, while consuming *no* power in the process. The two-cell nicad, a General Electric DS25D, is a rather small unit made for printed-circuit board mounting and thus fits in easily. This tiny battery will light the red LED for several hours when fully charged.

When AC power returns, DC is quickly restored to energize K1 and to charge the battery via IC1, the regulator. IC1 is a voltage regulator, but it also has current-limit capability. The 10-ohm resistor between pins 1 and 8 of the regulator causes charge current to be limited to 20 mA, even if the battery is nearly discharged. As the battery charges and its terminal voltage approaches the regulated voltage output to which IC1 is set, current drops below 20 mA and tapers off in the "constant-voltage" charge mode.

Meanwhile, the SCR remains nonconducting, which allows current to flow via the 360-ohm and 10 k-ohm resistors to the base of Q1, forward-biasing this transistor and lighting the yellow LED. Thus the yellow LED indicates that power has failed and returned. The red LED has, of course, been extinguished with the energizing of K1.

The final step in the sequence is when the person who uses this line-failure detector notices that the yellow LED is lit, and resets SW2. This act causes SCR1 to conduct, diverting current from the base of Q1, extinguishing the yellow LED and lighting the green LED.


Since it takes between 1.5 and 1.8 V to light an LED, I chose a battery consisiting of two nicad cells in series. This gives a battery voltage of 2.4 V, which is adequate to light LEDs of all colors, using series dropping resistors. Since the battery is charged in series with a 1N4454, the voltage-regulator output should be set (by means of the 5 k-ohm variable resistor) to between +2.9 and +3.1 V. This accounts for the series forward-voltage drop in the 1N4454. Note that an RCA-CA3085 is used as a regulator. An LM305H (National Semiconductor) will not substitute for this integrated circuit since it's not made to regulate below +4.5 V. The older National LM300H would work, however.

K1 can be any small relay having a coil voltage from 4 to 8 V DC, with a set of normally closed contacts. The series resistor is adjusted to drop the unregulated +8 V of the DC supply to the desired voltage of the relay coil. In my own case, a small relay (from an old radiosonde transmitter) which had a 400-ohm coil and which closed reliably on +4 V was used. A 390-ohm resistor was then used to drop the +8 V supply to the coil voltage of +4 V.■

Technical Forum is a feature intended as an interactive dialog on the technology of personal computing. The subject matter is open-ended, and the intent is to foster discussion and communication among readers of BYTE. We ask that all correspondents supply their full names and addresses to be printed with their commentaries. We also ask that correspondents supply their telephone numbers, which will not be printed.

Circle 52 on inquiry card.

Look what's happened to HIPLØT™

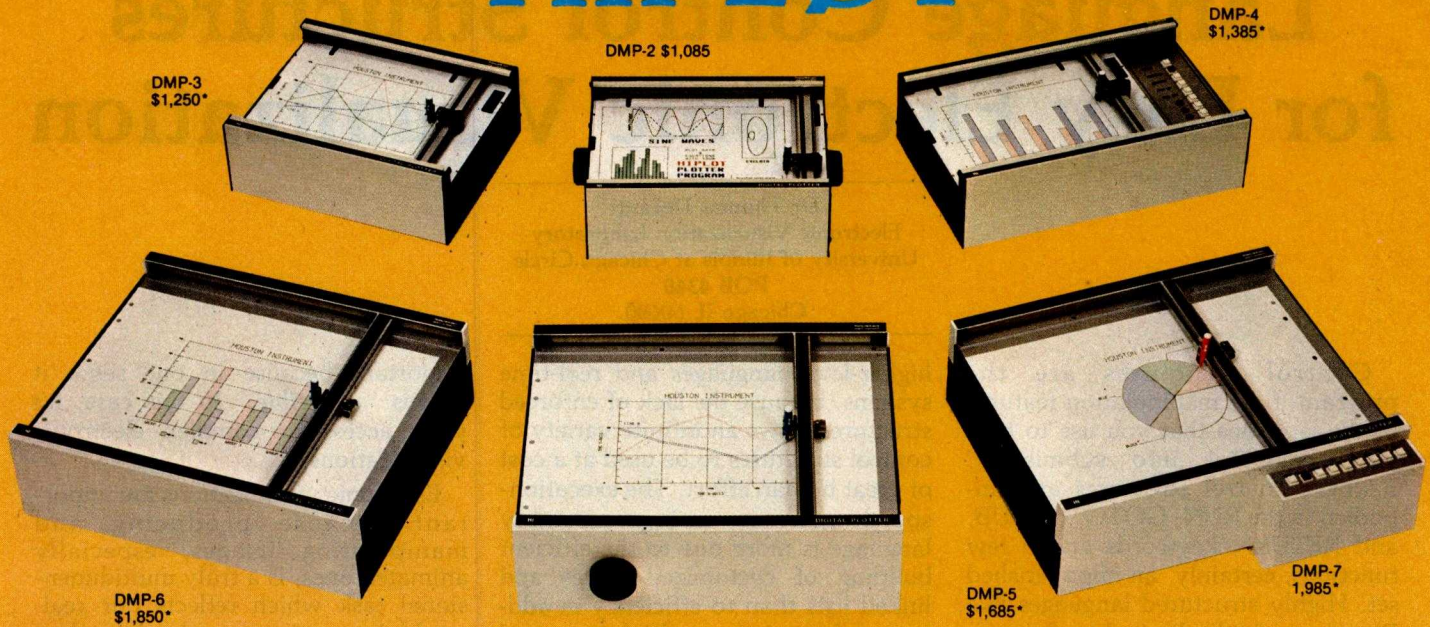

It's grown into a complete family of quality low cost digital plotters

*Yes, they are UL listed!***

Circle 53 for literature
Circle 54 to have representative call

In just two short years, The HIPLØT has become the most popular digital plotter among small systems users. With a record like that, what can we do for an encore? WE'VE INTRODUCED A COMPLETE LINE OF HIPLØTS...with a model suited for just about every plotting application.

The HIPLØT DMP Series is a new family of digital plotters with both "standard" and "intelligent" models available with surface areas of 8½" x 11" (DIN A4) and 11" x 17" (DIN A3). For the user needing a basic reliable plotter, we have the "old standard" DMP-2 (8½" x 11") and the "new standard" DMP-5 (11" x 17"). For those needing a little more capability, there are the DMP-3 (8½" x 11") and the DMP-6 (11" x 17")—both microprocessor controlled and providing easy remote positioning of the X and Y axes (perfect for the OEM). For those who want this intelligence plus the convenience of front panel electronic controls, we've provided the DMP-4 (8½" x 11") and the DMP-7 (11" x 17").

The "standard" plotters come complete with an RS-232-C and a parallel interface. The "intelligent" DMP plotters accept data from either an RS-232-C or Centronics data source. For the "standard" plotters, software is available from our ever expanding "Micrographic Users Group." The "intelligent" HIPLØTs use our exclusive DM/PL™ language which minimizes plot software to a fraction of that normally associated wth digital plotting.

With the new DMP Series, high quality digital plotting can now be a part of your system. It just doesn't make sense to be without this valuable tool when there is a DMP plotter with the plot size, speed and capabilities that are exactly tailored to your specific needs...and your budget.

Prices for the DMP series range from $1,085* to $1,985*.

For complete information contact Houston Instrument, One Houston Square, Austin, Texas 78753. (512)837-2820. For rush literature requests, outside Texas call toll free 1-800-531-5205. For technical information ask for operator #2. In Europe contact Houston Instrument, Rochesterlaan 6, 8240 Gistel, Belgium. Telephone 059/27-74-45.

houston instrument
GRAPHICS DIVISION OF
BAUSCH & LOMB

TM HIPLOT and DM/PL are Trademarks of Houston Instrument

*U.S. suggested retail prices only.
**DMP 2, 3 and 4 UL listed
DMP 5, 6 and 7 UL listing pending

Language Control Structures for Easy Electronic Visualization


Dr Thomas DeFanti
Electronic Visualization Laboratory
University of Illinois at Chicago Circle
POB 4348
Chicago IL 60680

Control structures are the program- flow manipulation features of the language that you use to beat your computer into submission. BASIC's control structures are embodied in the RUN, GOTO, GOSUB, and RETURN keywords and a few functions, certainly an impoverished set. Highly structured languages like Pascal are rigidly limited to the control structure of subroutines. Lowly structured approaches like assembly language are necessary to implement higher-level languages and real-time systems, because the lack of enforced structure allows an infinite variety of control structures to be used at a cost of great human effort. The execution-speed gain in using assembly language is more due to the efficient building of customized tables and linked lists than to efficiency in adding, subtracting, multiplying, and dividing numbers.


Assembler coding is by no means easy. Note the word "easy": it's important because in one sense it means *"accessible."* In this case, it's your access to complex electronic visualizations.

Electronic visualizations are important because producing and manipulating images, especially animated ones, is a truly multidimensional task which reflects our real-world interactions much more than maintaining an accurate laundry list or printing payroll checks. Producing them demands a lot from software,

1a

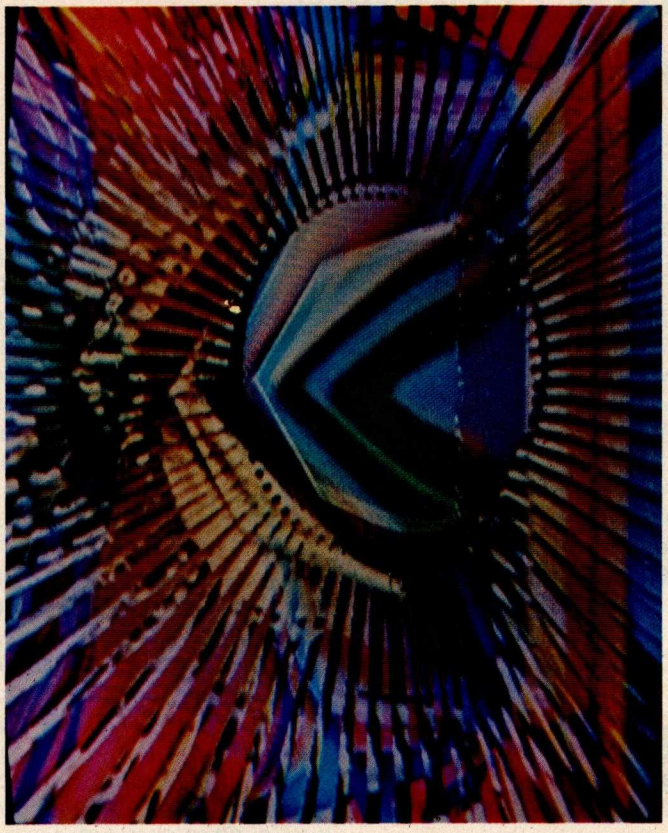

1b

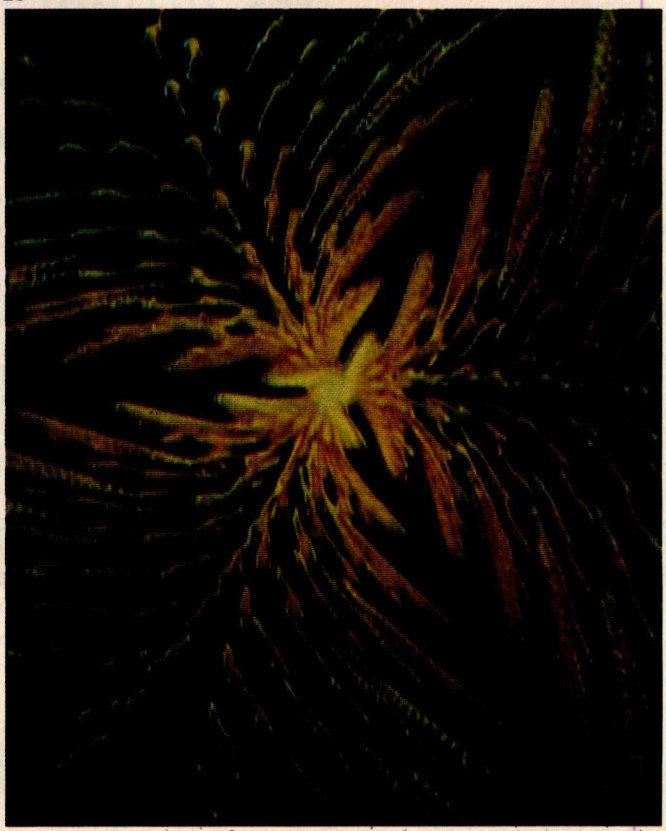

Photos 1a and 1b: *Sample output from the GRASS/Image Processor. Photo 1a was made by Guenther Tetz, and photo 1b by Dan Sandin and the author.*


Circle 55 on inquiry card.

Orange Micro

"SPECIALIZING IN PRINTERS AND CRT'S"

CENTRONICS 737 (RADIO SHACK LINE PRINTER IV)

Word Processing Print Quality




• 18 x 9 dot matrix; suitable for word processing • Underlining • proportional spacing • right margin justification • serif typeface • 50/80 CPS • 9½" Pin Feed/Friction feed • Reverse Platen • 80/132 columns

CENTRONIC 737-1 ..... (List $995) **$Call**

MALIBU

The Small Business Printer; Letter Quality & Speed.




• 10 x 9 dot matrix • Letter quality print; Lower case descenders • High speed; 165 CPS, Bidirectional, Logic seeking • Wide carriage, Adjustable tractors to 16" • Vertical forms control • Variable line spacing • User programmable character set • DOT RESOLUTION GRAPHICS

MALIBU 165 ..... (List $2495) **$2195**

EPSON TX80

A Reliable, Graphics Printer



• 5 x 7 dot matrix • 125 CPS • Double wide characters • Dot resolution graphics & 64 special graphic characters • 6/8 lines per inch • Vertical forms control • Adjustable tractors • Heavy duty — Highly reliable

EPSON TX80 ..... (List $799) **$Call**

ANACOM

Low Cost, High Speed, Wide Carriage

• 9 x 9 dot matrix • Lower case descenders • Wide carriage • Adjustable tractors to 16" • 150 CPS, Bidirectional, Logic Seeking

ANACOM 150 ..... (List $1350) **$1250**

EPSON MX80


Low-Priced Professional Print Quality

• 9 x 9 dot matrix • Lower case descenders • 80 CPS • Bidirectional, Logic seeking Tractor feed • 40, 66, 80, 132 columns per line • 64 special graphic characters

EPSON MX80 ..... (List $645) **$Call**

OKIDATA MICROLINE SERIES

TRS-80 Graphics Compatibility



• 9 x 7 dot matrix • 80 CPS • 80, 132 columns — 64 shapes for charts, graphs & diagrams • Double wide characters • 6/8 lines per inch • Up to 3 part copy • Friction & pin feed • 200 M character head warranty

OKIDATA MICROLINE 80 ..... (List $800) **$599**

THE SMALL COMPUTER PRINTER by Brent Weston

This illustrated booklet provides the information you need about today's small printers. There are many printers available, each with different features and capabilities. *The Small Computer Printer* will guide you in determining which printer best fits your applications. A complete feature comparison chart is included representing over 40 small printers. A printer is a big investment — learn all about them before you buy one.

$7.95




TELEVIDEO CRT'S
PRICES SLASHED!

TVI 912C
TVI 920C

Please Call Toll Free Prices are too low to advertise

BASE 2

The Hobbyist Printer With The Most Features



• Graphics • Tractors/Friction Feed • 2K Input Buffer • RS-232 Serial, Centronics® Parallel, IEEE-488, 20 ma • TRS-80 Cable option • 100 CPS • Fast form feed • User programmable character set • 64, 72, 80, 96, 120, 132 Columns/line • Expanded characters • Automatic skip-over-perforation • Horizontal & Vertical tabs • Programmable vertical line spacing • Intel 8085 Microprocessor — over 40 software commands

BASE 2 800B ..... (List $699) **$649**

PRINTERS

CENTRONICS 730 Radio Shack Line Printer II	(List $795)	**$ 639**
OKIDATA MICROLINE 82 & 83		**$ Call**
NEC 5530-5 letter quality, RO, parallel, tractors	(List $2970)	**$ 2599**
PAPER TIGER IDS 440 w/graphics and 2K buffer	(List $1094)	**$ 939**
PAPER TIGER IDS 460 w/graphics, 9 x 9 dot matrix	(List $1295)	**$ Call**
QUME 5/45 typewriter quality	(List $2905)	**$ 2559**

INTERFACE EQUIPMENT

APPLE II - BASE 2 parallel graphics interface board ᶜ cable		**$ 160**
APPLE II - EPSON TX80 parallel graphics interface board ᶜ cable		**$ 110**
SSM AIO BOARD Apple Serial/parallel interface	(List $225)	**$ 199**
MICROTRONICS Atari parallel interface		**$ 69**
ATARI 850 Interface module, serial/parallel		**$ 199**
TRS-80 CABLES		**$ Call**

TOLL FREE
(800) 854-8275
CA, AK, HI (714) 630-3322

At Orange Micro, we try to fit the right printer to your application. Call our printer specialists for free consultation.

CALL FOR FREE CATALOG

Phone orders WELCOME. Same day shipment for VISA, MASTER CHARGE, and AMERICAN EXPRESS. Personal checks require 2 weeks to clear. Add 3% for shipping and handling. California residents add 6%. Manufacturer's warranty included. Prices subject to revision.

Orange Micro
3148 E. La Palma, Suite E
Anaheim, CA 92806

and making their access easy requires paying attention to the provision of rich control structures in a language.

Electronic Visualization is an intentionally broad term meant to conjure thoughts of computer graphics, animation, image processing, video synthesis, and even advanced word-processing. Anyone successfully producing images for communication is unlikely to reject a technique for reasons of algorithmic purity (as a computer scientist might feel forced to do). Computer hobbyists use the tools at hand, and electronic visualization is the means to the end and the end product of using these tools. Simultaneously, it can be *both* because we are seeing the vast increase of real-time imaging systems, even in microcomputer-based configurations; and controlling these real-time systems can be as feedback-intensive as playing a musical instrument or driving a racing car.

Just to unify the concepts so far, think about this question: what besides the cosmetic packaging governs our choice of a musical instrument or an automobile? It is a combination of capability and user control, of course: having one without the other is useless. So why are the programming languages currently available so impoverished on the control-structure side?

> The most successful approaches to date are basically highly developed, beautifully evolved kluges.

Perhaps it is because computers were invented to process payrolls, not images. Television, on the other hand, is image-oriented and currently uses a host of presently emerging real-time digital techniques and increasingly flexible control structures. As a matter of fact, just about all the television you see these days is digitally processed for purposes of synchronization.

Television is a high-speed medium conducive to parallel and pipeline processing. You are driving television rather than generating it. TV cameras are on all the time and you, as director, are fading, switching, adding titles and constantly throwing away images that you don't want. Control is the name of the game.

The television folk are not about to give up rich, real-time control structures and the computer folk won't give up language. How to get them together is the essence of the task at hand.

Getting Computers and Television Technology Together

Looking at the history of control structures for computer graphics and for television, we see that most computer-graphics usage, with the obvious and exciting exception of video games, is some variety of non-real-time plotting. This is where the money is and where the language development for computer-aided design has been focused. No manufacturer of equipment for computer graphics (excepting the video-game people) now depends on animation for solvency. Plotting is slow and often merely the side output of a large FORTRAN finite-element analysis program. Visual aesthetics are rarely the primary concern, if any concern at all. People who use such systems are highly skilled and highly paid technicians who became that way by having to deal with plotting packages as a condition of employment. If the job were easy, they wouldn't get paid so much.

We are just reaching the point of electronically generating and manipulating images, in real time, under program control. How do we design languages to deal with real time? Or, more important, why do we want such a language, an alphanumeric string-oriented language, at all? Why not use picture-based languages with symbols for motions and timing?

How Can You Control Images Easily?

After about ten years of living with this obvious and nagging question, some conclusions became clear. First, purist approaches to electronic visualization are hopeless. Image control employs a hybrid of languages, several input devices, picture-oriented commands, custom hardware, and a smattering of idiosyncrasies. The most successful approaches to date are basically

A CREATION OF COMPUTER HEADWARE

WHATSIT?™

(Wow! How'd All That Stuff get In There?)

A sophisticated, self-indexing filing system—flexible, infinitely useful and easy to use, that adapts to your needs.

WHATSIT's unique capabilities:

***Multiple Entries** allowed per field: For example, a bibliographic file can associate each work with any number of authors. WHATSIT allocates file space as needed for each.*

***New Data Fields** added "on the fly": You're not confined to a particular "record layout" that must be declared in advance. Your file evolves to fit your needs.*

***Immediate Response:** Even in the largest files, WHATSIT responds in seconds, thanks to pointer linkages and hash coding.*

***Conversational Dialogue:** Query and update requests may be intermixed in any order, without returning to a "menu selector."*

NEW

Apple II Plus WHATSIT at special introductory price: $95

(Regular price, $150 after December 31, 1980).

WHATSIT comes ready to run on your Apple, Apple II Plus, AlpaMicro NorthStar, or CP/M computer. See your dealer for a full demonstration . . . or write or call:

HARDHAT Software

P.O. Box 14815 • San Francisco, CA 94114 • Tel: (415) 621-2106

Circle 56 on inquiry card.

The MAGIC WAND™ is ALMOST PERFEC.

We've been saying it for a few months now, and the reviewers seem to agree.

"Until I saw the Magic Wand, if I were allowed to own one and only one editor, Word Star* would have been it. . . . My personal preference is for Pencil or Magic Wand for text creation."

Jerry Pournelle
On Computing, Summer 1980

"The basic functions of the Magic Wand editor are as easy to learn as those of Electric Pencil*. . . . Magic Wand dominates in the area of print formatting."

Larry Press
On Computing, Summer 1980

"Of all the word processors I have used (and that includes a dozen or more), the Magic Wand is the most versatile. The Wand has almost all of the features of other processors, plus many new ones of its own. It measures up to even the word-processing software running on the largest mainframe computers."

Rod Hallen
Microcomputing, June 1980

"The Magic Wand is one of the most flexible word processing packages available, and should be considered by any potential word processing purchaser."

Glenn A. Hart
Creative Computing, August 1980

Available for both the CP/M® and OASIS operating systems

small business applications, inc.

3220 Louisiana • Suite 205 • Houston, Texas 77006 • 713-528-5158

Electric Pencil is a trademark of Michael Shrayer Software, Inc.
WordStar is a trademark of Micro Pro International, Inc.
CP/M is a registered trademark of Digital Research Corp.

Circle 57 on inquiry card.

highly developed, beautifully evolved kluges. We know what "purism" in coding FORTRAN and BASIC does to image production. Purism in television technique eliminates computer graphics as we know it. So how about using graphic symbols to save the day?

Using symbols in a menu and some sort of manual-selection mechanism is an approach taken by many FORTRAN graphics systems. This limits the number of symbols to those defined in the menu and there is no user-level extensibility in that you cannot create new symbols out of sequences of old symbols, which eliminates the one truly unique feature of computers. To state it bluntly, you can't program with a menu.

What happens, however, if you do find a system that provides for the combination of nonalphanumeric symbols in meaningful ways? In an extremely advanced case, it should look something like Japanese, and you might note that the language used to program computers in Japan is a *phonetic alphanumeric transcription* of their language. They do not program in their extremely beautiful and rich symbol set. Eliminating alphanumeric languages is not such a hot idea, except in turnkey systems.

The second conclusion gestating for the past ten years is that complete parallelism is necessary for controlling images in meaningful ways. You simply must be able to develop sequences independently and merge them in ways that do not necessitate rewriting the programs. Xerox's Smalltalk and certain other languages have this capability, as do television technology and everyday life: making this parallelism easily accessible takes real care.

The third conclusion is that a flexible priority scheme is needed. Some tasks are more important than others, just as in real life and computer operating systems. It is essential to give this capability to the user of an electronic visualization system.

Fourth, providing for user extensibility at several levels is the only way people will easily be able to use a system for applications not envisioned by the designer. I will discuss this later.

Fifth, the system must be software-fault tolerant. Fault-tolerant hardware has been a research area of great importance to real-time control systems, yet language purists still think people should solve problems in structured, orthodox, algorithmic ways. A computer language should provide as many paths to a given communication as possible, as natural languages do, and the kind of error handling that a friend would offer. Allowing nonstructured, nonprocedural, "seat-of-the-pants" programming is often the only salvation when the final goal is aesthetically defined, and is, perhaps, not at all clear. It has been called "fuzzy programming," and it's easy to throw in the recursive, value-returning, clever structured-programming capabilities as well, but limiting yourself to these latter approaches stifles human creativity, problem-solving, and sideways thinking.


Zgrass — A Language for Easy Electronic Visualization

Zgrass is a programming language and operating system written in assembly language for the Z80 microprocessor by Nola Donato, Jay Fenton, and me. Not surprisingly, it embodies all the control structures mentioned so far in this article and

Tax Practitioners / CPAs:
Successful Tax Professional Reveals Effective Practice Development Formula....

NEW!

"Every tax professional...whether he is desirous of expanding his practice, or just better serving his existing clientele (or both)...can profit from this system."



Are you satisfied with the growth of your tax practice?

Successful practice development is a perplexing problem facing all tax professionals today. The field tested MICROTAX professional tax preparation software package can provide you with an innovative solution...and at the same time enable you to serve your existing clientele in a more professional and timely manner.

Consider the advantages this state-of-the-art package can bring to your practice:

- **Complete System...** ...containing Federal Individual, Corporate AND State Individual returns. The system is designed to accept information, summerize the data, compute the tax, and print the returns; including **all** forms and schedules required by the I.R.S.
- **Versatile** MicroTax is cost-efficient for practices preparing as few as 20 returns per tax season...but comes with a fast mode, capable of processing 2,000 returns—or more!
- **Best Of All...** ...and this is really exciting...MicroTax allows you to offer **preyear-end tax planning** to your clients—enabling you to predict the potential liability and take steps to minimize the tax in a timely manner.
- **Complete In-Office Security** —no risk of sensitive client information falling into the wrong hands.
- **Saves Time** Compared with conventional service bureaus, MicroTax offers virtually instant turn-around time.
- **More Professional** Greater range of services allows you to present a more professional appearance to your clients.
- **Requirements:** CP/M, Microsoft Basic & 48K Memory
- **Introductory Price ('til Dec. 1, 1980)** MicroTax is available as a three part system:

Federal Individual	$750.00	Annual Updates
State Individual	250.00	Are Available
Corporate	250.00	

MicroTax is a versatile and money-saving tool that **NO** tax professional should be without (it's been selected for use by COMPU-TAX of Utah).

Call or write today for additional information, or your nearest dealer. Problems that can't wait? Call Don White our V.P. of Research and Development, direct, at (213) 668-0238.

Circle 272 for microTax

Circle 58 for SOFTWARE Inc.

microTax
Income Tax Software Specialists


Available at most Professional computer retailers

Exclusive Distributor
S.O.F.T.W.A.R.E.+ Inc.
3600 WILSHIRE BOULEVARD, #1510, LOS ANGELES, CALIFORNIA 90010 • **(213) 738-9972**



The 2nd Generation™ is here!

MEASUREMENT systems & controls proudly introduces its new and exciting "2nd Generation" family of S-100* compatible products. Each has been specifically designed for use with multi-user and network operating systems such as MP/M, CP/NET, and OASIS. Every product is fully tested and burned-in, comes with a 1 year guarantee, and offers you features not currently available from any other source.

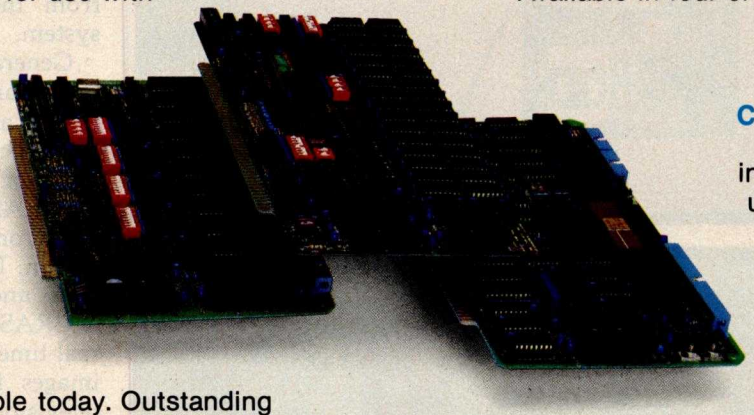

Z80 PROCESSOR BOARD — The most powerful CPU board available today. Outstanding features include 4MHz operation, high-speed serial and parallel I/O utilizing DMA or programmed control, eight vectored priority interrupts, and a real time clock.

MULTI-USER SERIAL I/O BOARD — For use in expanded systems requiring up to eight additional serial I/O ports. Features include: 16 maskable vectored priority interrupts, RS-232C interfaces with full handshake, asynchronous or synchronous operation with asynchronous baud rates to 19,200. Available in four or eight channel versions.

DOUBLE DENSITY FLOPPY DISK CONTROLLER BOARD— controls up to four 5¼-inch or 8-inch disk drives using IBM soft sectored formats. It features 1K of on-board buffering, DMA controlled data transfers and the performance characteristics of the superior NEC 765 chip.

64K BANK SELECTABLE MEMORY BOARD — Features include I/O port addressing for bank select with 256 switch selectable I/O ports for the memory bank addressing. The memory is configured as four totally independent 16K software-selectable banks, with each bank addressable on any 16K boundary.

"Attractive Dealer & OEM Prices"
See your nearest computer dealer, or contact us for the complete story on The 2nd Generation.


*All products meet the new IEEE standards.

Systems Group


A Division of MEASUREMENT systems & controls incorporated

867 North Main St. / Orange, Calif. 92668
(714) 633-4460 TWX / TELEX: 678 401 TAB IRIN


2a

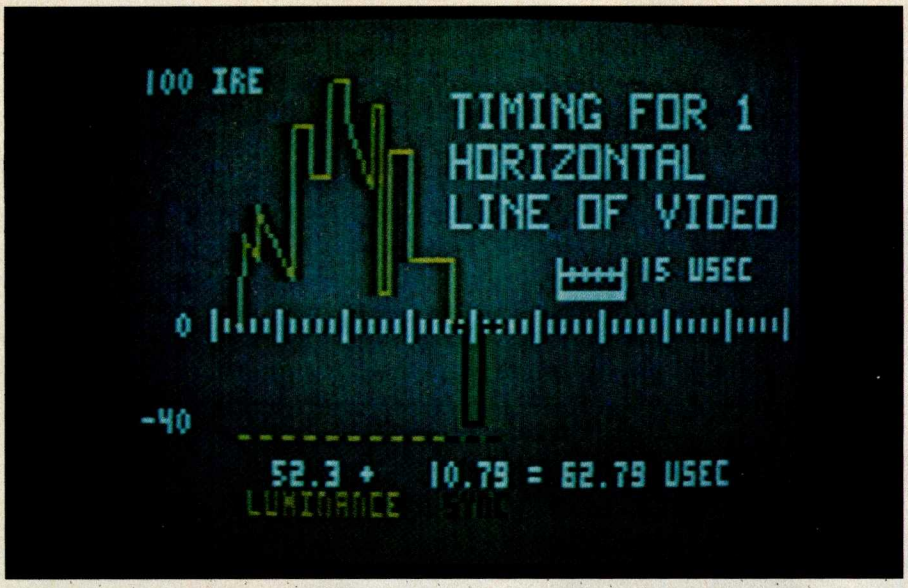

2b

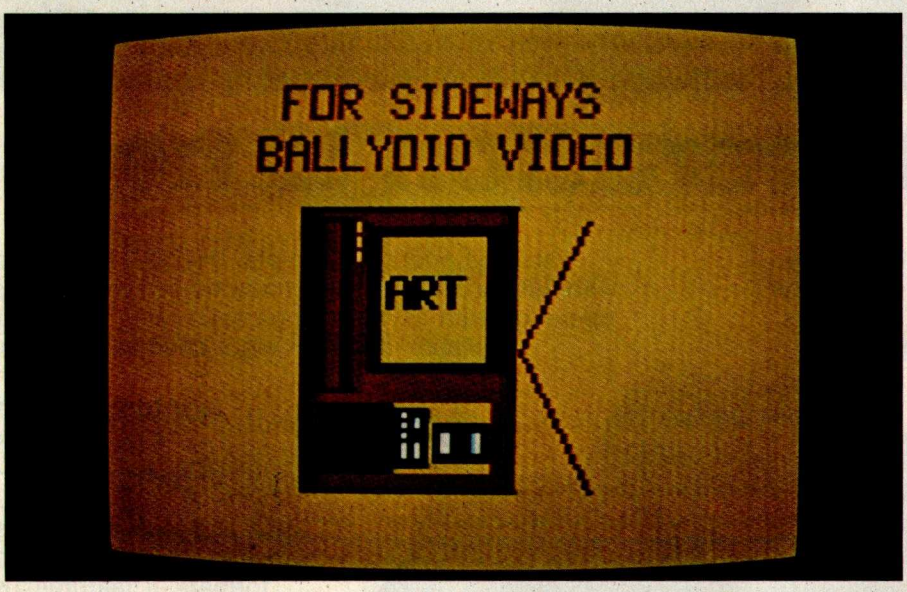

2c

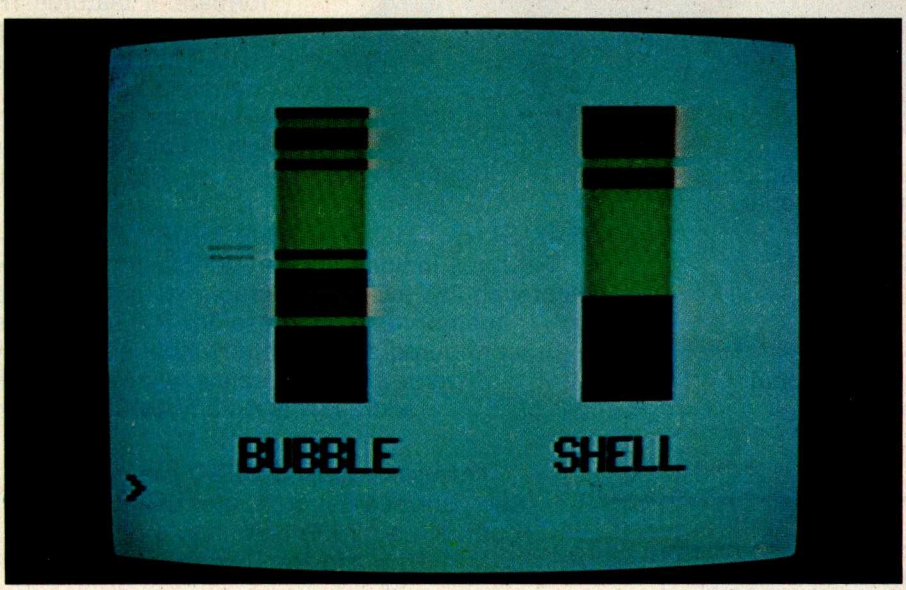

Photos 2a, 2b, and 2c: *Sample output from the first Zgrass system, with a resolution of 160 by 102 pixels, with 2 bits per pixel. Photo 2a was made by Copper Giloth, and photos 2b and 2c by Nola Donato.*

has been in development for ten years.

Zgrass started out as GRASS (Graphics Symbiosis System), a language designed to bring the immense complexity of a Digital Equipment Corporation PDP-11/45 and as Vector General 3DR Display system within the grasp of artists and educators at Ohio State University. It has high levels of interaction, parallelism, priority, and tree-structured manipulations of vector-defined objects. Photos from this system can be seen in "About the Cover... And Some More of the Same," in the October 1977 BYTE, page 22.

GRASS depends on $120,000 of equipment to run — rather expensive for a single-user system — but it is one of the first highly developed non-FORTRAN interactive graphics systems for use by artists.

In 1973, Dan Sandin, inventor of the Image Processor, brought color television usage to our computer graphics work at the University of Illinois at Chicago Circle. Dan and I developed most of the ideas about control structures presented here. Photos 1a and 1b show some output from the GRASS/Image Processor system.

Generating a complete programming language with parsers, compilers, and graphics takes a lot of human effort. More than ten person-years of programming were devoted to GRASS, aided by generous support from the National Science Foundation, National Endowment for the Arts, and others.

GRASS is totally oriented toward real-time generation and control of images for the simple reason that television cannot easily be slowed down for long and/or time-lapse exposures as can be done with film. The control structures for GRASS were developed ad hoc and became increasingly idiosyncratic. Nola Donato, a postgraduate student of mine, decided to teach me how to generalize many of the programming-language concepts. The result was GRASS3, which later became Zgrass.

In 1977, I was led to Jeff Frederiksen at Dave Nutting Associates, who was developing a deluxe home computer for Bally Corporation using the custom integrated circuits they had developed for the Bally Arcade video game. The pros-

Don't play games with your company's money.

Our entry level computer system is the first step in a full range of computer products. Not the last step in a full range of computer games.

We call it VIP. The Vector Intelligent Partner. And with a price of just $3695, you can't get more computer for your money.

VIP has all the assets and none of the liabilities of other entry level systems. It starts off with a lot more disk capacity. It has the same computational power, uses the same software as our larger systems, and can be upgraded at any time. So you avoid the expense of new hardware and software when you outgrow your current system.



You'll be able to do low cost word processing, mail list sorting, database management and accounting. You can even do software development.

VIP is perfect for salesmen, real estate brokers, insurance agents, small business owners and corporate department heads.

Because at Vector, improving your business is the best way to improve our business.

For information contact Vector, 31364 Via Colinas, Westlake Village, CA 91362. Or call 213/991-2302.

VECTOR

Economy Sized Computers™

Circle 59 on inquiry card.

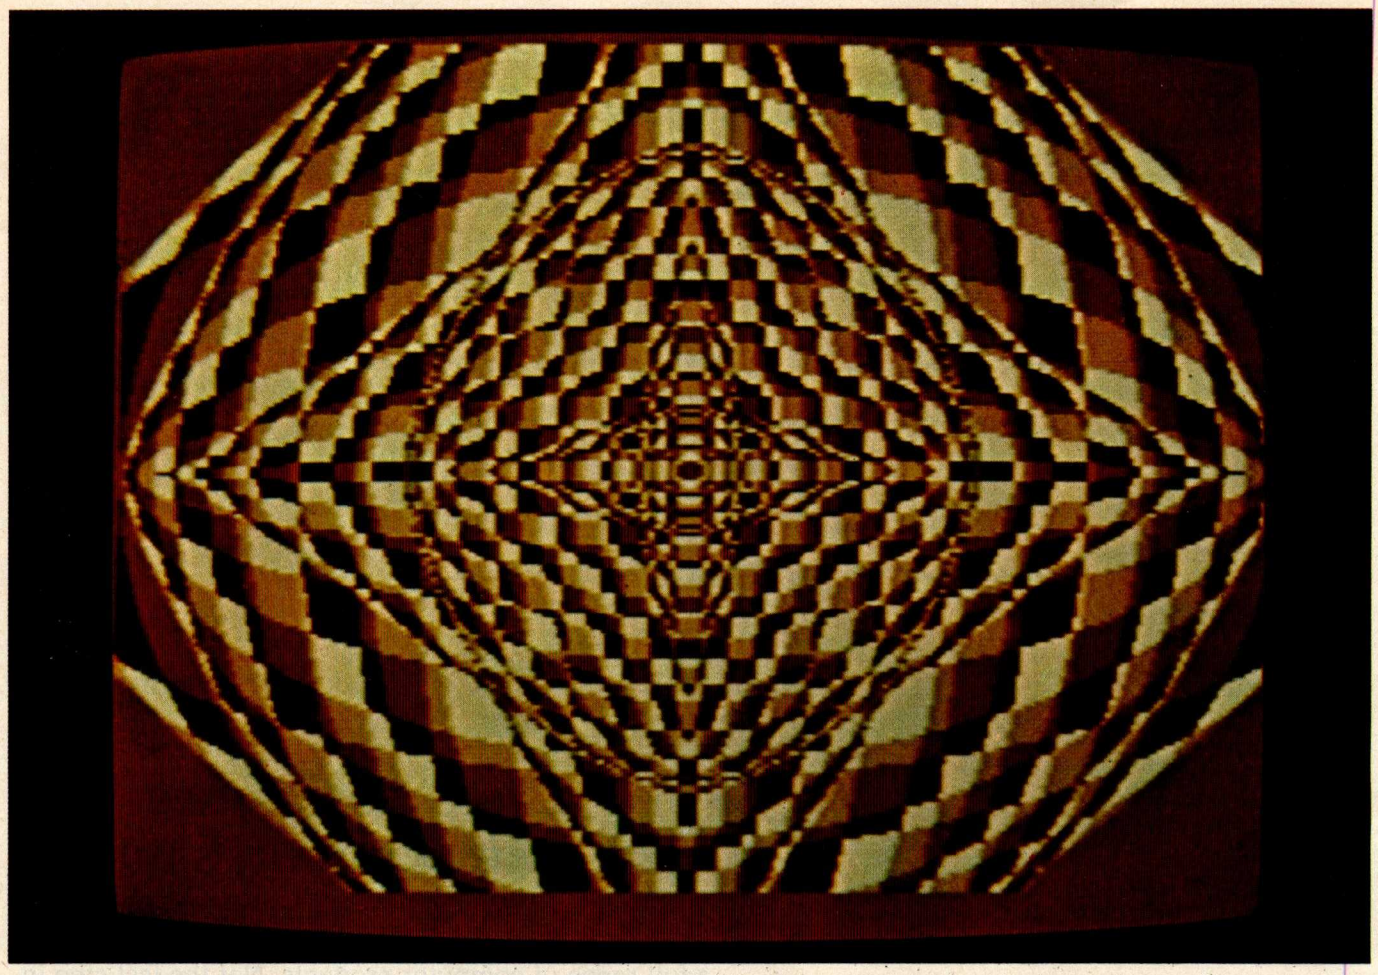


Photo 3: *Sample output from a later version of Zgrass, with a resolution of 320 by 204 pixels with 2 bits per pixel. Photo 3 was made by Frank Dietrich.*

pect of developing a language for fun, one that had user-orientation as the benchmark rather than how many FOR-NEXT loops you could execute per unit time was too good to pass up. I was contracted to produce Zgrass, and in a year, Nola Donato, Jay Fenton (a legendary wizard of video games and pinball-machine operating systems), and I had generated 9000 lines of code. (Much of the work was done not in a lab but in a cabin in the woods of Wisconsin!) Examples of output from this system are seen in photos 2a, 2b, and 2c. Note that the resolution of this first Zgrass machine is 160 by 102 pixels (ie: picture elements), with 2 bits per pixel.

Some confusion arose about whether we were producing a hobbyist machine or a home computer for consumers, so the project was suspended. Even now nobody really knows what a "consumer computer" is supposed to be.

From consulting with less enlightened would-be consumer computer manufacturers, I have perceived that they follow the rather negative view of consumerism. (Few people reading this article would be considered only consumers — I assume that BYTE readers are mostly hobbyists or professionals.) Consumerism is based on great market penetration, and the big question is: "How do you get 90% market penetration like color TV?"

It is also based on consuming, that is, wearing out or getting sick of hardware and software so you go buy more and consume it. The user is expected to supply no creativity, just assume a passive, susceptible-to-entertainment pose — this reminds you of television watching, doesn't it? Well, anything requiring creative energy is akin to hobbyism.

Consumer computers do exist in the form of video games that you can get bored with and buy more — even the advertisements invariably cite the number of new games to be available each month. I don't know how to write a programming language that wears out, though. User-extensibility is planned "nonobsolescence." Zgrass is not a consumer language by current standards.

The project is on active status again, but this time with a hobbyist/professional orientation. We believe there are many people who want a recordable image-producing system for around $3000. The current configuration includes:

- Z80 processor with 16 K bytes of EPROM and 48 K bytes of programmable memory
- custom graphics integrated circuits and floating-point hardware
- dual UARTs (universal asynchronous receiver/transmitters) for connection to larger computers, printers, etc
- RBG (red, blue, green) monitor for best color resolution



Please send your free software catalog.

(Check which software is of particular interest)

☐ C COMPILER. Optimized native code for VAX 11/780, PDP-11, LSI-11, Z80, 8085, 8080. Full C language as defined in Kernighan and Ritchie, with comprehensive portable library. Cross compilers available. Runs under VMS, IAS, RSX-11D, RSX-11M, RSTS/E, RT-11, UNIX, Idris, CDOS, CP/M. From $600

☐ IDRIS OPERATING SYSTEM. System calls and file system identical to UNIX V6, including pipelines. Utilities include shell, editor, assembler, loader, archiver, compare, copy, grep, etc., plus system utilities for file system maintenance. Runs on LSI-11, PDP-11. From $1000.

☐ PASCAL COMPILER. Optimized native code for VAX 11/780, PDP-11, LSI-11, Z80, 8085, 8080. Full Pascal language as defined in Jensen and Wirth, with standard library. Includes C compiler and portable library, permitting intermixed C and Pascal. Cross compilers available. Runs under VMS, IAS, RSX-11D, RSX-11M, RSTS/E, RT-11, UNIX, Idris, CDOS, CP/M. From $750.

Idris is a trademark of Whitesmiths Ltd.
UNIX is a trademark of Bell Laboratories.
CP/M is a trademark of Digital Research Co.

VMS, RSX-11, RT-11, RSTS/E, VAX, PDP-11, LSI-11 are trademarks of Digital Equipment Corporation.

Name_____

Company_____

Street_____

City_____ State_____ Zip_____

Whitesmiths, Ltd.
Software for grownups.
(212) 799-1200
P.O.B. 1132 Ansonia Station, New York, N.Y. 10023

- alphanumeric terminal (which the user provides)
- provision for floppy disks, tablet, other I/O (input/output) devices

Eight Zgrass units in this configuration have been alive and well and tied into the Bell-Laboratory-developed UNIX operating system since January 1980. Although I have only discussed software design, I must mention that the hardware to test the concepts really exists! See photo 3 and note that the resolution is now 320 by 204 pixels, with 2 bits used per pixel.

Details of Zgrass Control Structures

Programs in Zgrass are called *macros*. Macros are stored as ASCII (American Standard Code for Information Interchange) character strings and normally contain executable Zgrass commands. The fundamental unit of execution in Zgrass is a command, which is either an assignment statement or a function call.

Zgrass does not require declaration of variable types (with the exception of array dimensioning). The software automatically does all conversions that make sense based on the context. Any argument can be a function call whose returned value is converted to whatever is needed, if at all possible. Literals, indirect references, variables, built-in commands, user-defined commands, and user-defined macros are all handled by the same parser, so the syntax is very predictable. The fact that there are no restrictions on name length helps to produce easily read code.

User-Level Extensibility

Extensibility in Zgrass is achieved in two major ways. First, you can write macros which return values, produce graphics, or ask questions; or, through string-manipulation primitives written by Barb Wilson, you can generate other macros. Macros use arguments in exactly the same way as system commands, and are even named and called like system commands.


To reiterate, macros are simply strings of ASCII characters. When a macro is called, an MIB (Macro Invocation Block) is automatically built. It gives information on the invoking function call, the passed-argument list, and pointers to local variables, and provides room for the returned value. MIBs form a stack which implements the subroutining and block structuring of the language. When the macro returns, the MIB is deleted along with the local variables and unused literal arguments, if any, and control is passed back to the caller.

If arguments are to be passed to a macro, they are read by the normal input command, and print statements are suppressed as long as there are arguments left. If no arguments are present or an insufficient number are passed, the print statements function normally and the macro asks for input from the terminal. This allows macros to be used whether or not you know the arguments wanted, with no extra code by the author of the macro.

Macros can also be executed in parallel as background jobs. When called and suffixed by a ".B", the Macro Invocation Block is added to a background linked list. After that, the macro will run forever (it restarts at the beginning when it tries to return) until Control-C or the stop command selectively kills it. Photo 2c shows two sorting algorithms being compared for execution speed in real time, a tricky task in most languages, easy in Zgrass.

The background parallelism is achieved by interleaving execution of the macro statements. The MIB contains all relevant context for execution, including a pointer to the next command to execute, so switching MIBs after each line has been completed is simple and gives the functional parallelism. If there are five background macros, each one gets a line executed, in turn, round-robin fashion. This construct is simple and straightforward with no bizarre side-effects except that unusually time-consuming commands will make the parallelism temporally step somewhat. Background interleaving is easily understood and used even by the most naive users.

Meanwhile, the keyboard is still active. When the user types a command line, it is executed at a higher priority than the background macros. If the user initiates a macro at keyboard level, it will finish before the background macros continue. In any event, the keyboard overrides the background, again in an obvious, predictable way.

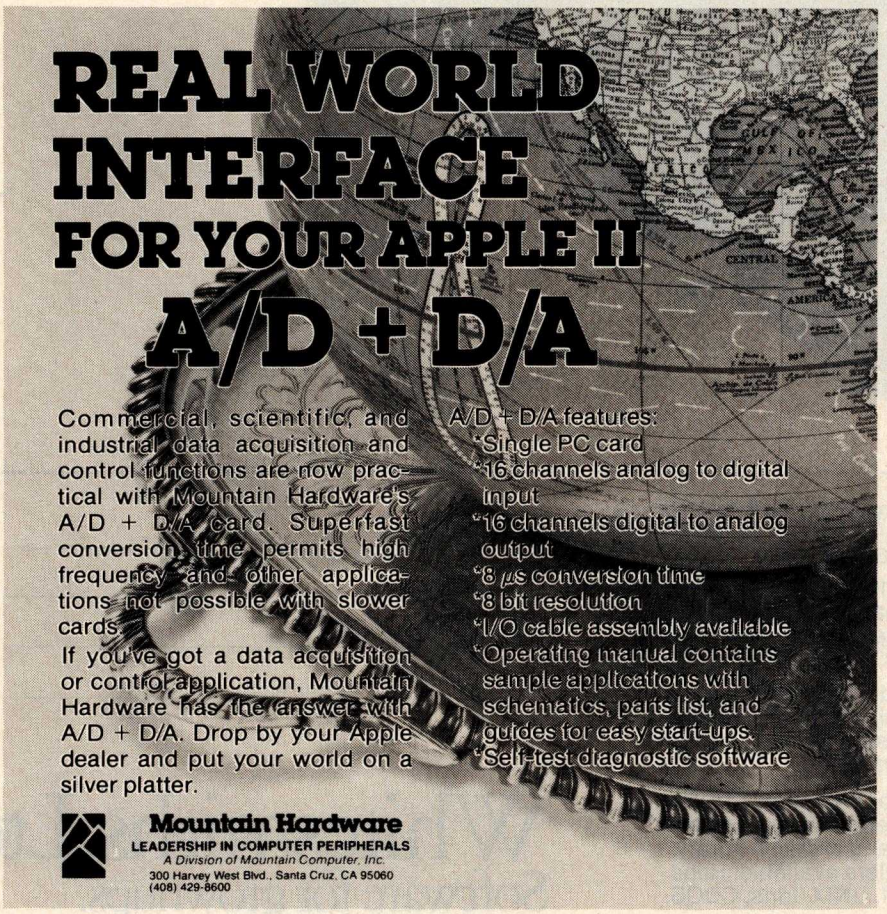

Circle 61 on inquiry card.

COMPUTERS–TERMINALS–MODEMS!

NEW!
TI-99/4 Home Computer



Optional color monitor
$449

Main console unit
$889
(Includes RF modulator for use with any TV)

Write for a list of extensive program modules available—everything in games, education, and home computer applications.

NEW!
From Perkin-Elmer
1250 Super Owl

$1799



Intelligent CRT

Incredibly powerful and flexible

- 24 **fully programmable** function keys
- Full screen editing capabilities
- RAM memory for down line loading by host computer
- Built-in printer port
- Full polling capabilities
- Detachable keyboard
- Optional light pen
  Much more!

Penril 300/1200 Modem

Connect any computer or terminal to the phone lines.

- 1200 Baud—Bell 212A **$799**
- 300 Baud
- Originate/Auto answer
- Full duplex
- RS232
- 1 year warranty



Direct connection to the phone lines via RJ11C standard extension phone jack

USR-330 Modem

- 0-300 Baud—Bell 103/113
- Originate/Auto answer
- Half/Full duplex
- RS232
- 1 year warranty

$339




Direct connection to the phone lines via RJ11C standard extension phone jack

USR-1600P Computer

NEW!

$4099



PASCAL


With **power** and **speed** for business, educational, and scientific applications.

W.D. Microengine™-based single board computer with 64K RAM

- 1 megabyte of floppy disc
- 2 parallel ports
- 2 serial ports
- Floppy disc controller with DMA
- File manager
- Screen oriented editor
- Single cabinet design
- Includes power supply

Perkin-Elmer
Bantam 550 CRT

$749



- Transparent mode
- Addressable cursor
- Editing functions
- Upper/lower case
- Compact


The Phone-Link Acoustic Modem NEW!



- Sleek, low profile
- 0-300 Baud
- Originate/Answer modes
- Half/Full duplex
- Self-test
- RS232—Will work with any RS232 computer or terminal
- LED displays of all functions
- 1 year warranty
  At your computer store now!

$179

Perkin-Elmer 650/655
CRT Page Printer



- 100 CPS
- Quiet
- Compact
- RS232
- Can be added to **any** CRT with our interface option.

$999

The printer designed to give you rapid, reliable, hard copy of your CRT screen display.



DEC LA34

$969

- Teletype 43 plug compatible
- Variable character sizes
- Full width paper
- Many more features
  Write for print sample

Teletype Model 43KSR $1049
Microterm Mime IIA CRT $819
Microterm ACT VA $779

We offer **full service**, on-site maintenance plans on all equipment.
Any product may be returned within 10 days for a full refund.

U.S. ROBOTICS INC.
203 N. WABASH SUITE 1718 CHICAGO, ILL 60601

SALES (312) 346-5650
GENERAL OFFICES (312) 346-5651
SERVICE (312) 733-0497

The user may also specify programs to run as the result of a clock interrupt. When a macro call is suffixed by a ".F", the Macro Invocation Block is chained into a list that is polled every 1/60 second. The user sets the frequency of execution from 1 to 32,768 sixtieths of a second. These foreground macros execute on a higher priority level than the keyboard and background macros so they will start up just about on time (again, delayed only by a time-consuming graphics command). Foreground macros allow a keyboard command to be slipped in during context switching.

Zgrass, then, has three effective levels of priority with parallelism at two of the three levels. Since the Macro Invocation Block maintains all context information, even recursive programming is possible at any level.

One of the severe problems in interpretive, extensible languages like Zgrass is the overhead of parsing and looking up names in name tables. For this reason, Zgrass has a compiler which eliminates the overhead and dramatically increases speed. All the automatic conversions, priority, and parallelism continue to work. Compiling does eliminate some of the interactive debugging features, so **you usually debug on the noncompiled version first.**

Zgrass System Extensibility

Zgrass also allows extensibility at the system-command level. A system such as this should allow an experienced programmer to write new commands in assembler and interface them to the system easily, certainly without changing the EPROMs (erasable, programmable read-only memories). A transfer vector in low memory and a series of Z80 RST (special restart subroutine-call) instructions allow communication with about one hundred system routines which do parsing, type conversion, graphics primitives, and so on.

Documentation explains what these routines do, and anyone with a cross assembler (or patience for hand assembly) can write new commands of which the system has no prior knowledge. Such extensibility allows virtually infinite variety of specialty graphics commands, device drivers, and so forth to be written and distributed to others on audio tape, disk, or over telephone lines. Terry Disz wrote a debugging program used as a disk-resident command for setting break-points, dumping memory and registers and so on. This capability is not for everyone, but it's there.

The maximum size of one of these user-written nonresident commands is 4 K bytes. Since the typical Zgrass machine has 30 K bytes of programmable memory, the amount of potential custom code is immense. All housekeeping for storage allocation and deletion, maintenance of temporary scratch-pad areas and general cleanup is done by system routines. You only concentrate on the details, obeying a few rules for writing position-independent code.

One further type of extensibility is easy to get. Zgrass has an extra UART which talks to other computers quite nicely. Larger computers can send graphics and character data to your Zgrass machine. Zgrass units can even talk to one another at up to 19.2 k bps!

Error Handling, Debugging and Automated Instruction

Zgrass was designed from the beginning to be a language for writing CAI (computer-aided instruction) programs. In particular, it was designed to be self-teaching to a fairly high degree. When Zgrass is used as a CAI system, the result of providing parallelism, string manipulation, and good error handling is that the student always has the power of the whole language to explore while the author of the CAI programs is also in control.

Since macros are character strings, they can be built and executed. You can take student input, make it into a program (before the student even knows how to edit), let parameters be changed, show the results, and verify certain classes of results both during execution and after. The approaches we have taken to Zgrass CAI are beyond the scope of this article, so I will just mention the system features which make CAI possible.

Error-handling routines normally **generate error-message numbers on** the terminal. There are about sixty of them and they are quite specific. During regular programming, they are used in conjunction with single stepping, variable printing and other **debugging techniques to identify**

SOFTWARE ENGINEERS

WE'RE KNOWN BY THE COMPANY WE KEEP.

Wescom, Inc. has joined with Rockwell International. This move will strengthen our already envious industry standing. We are seeking bright professionals interested in a career at the leading edge of the telecommunications industry.

These positions require a BSEE or BSCS with a minimum of 1-3 years software design experience. Experience in control processing, real time, and/or 8080 ASSEMBLY language is considered a plus.

SYSTEMS SOFTWARE
Provide the design for new call processing features and systems, modular functional descriptions and interfaces, software architectural and data base design.

OPERATING SYSTEMS SOFTWARE
Design and develop software that maintains a system that's operated by stored program control. Involvement also includes design and implementation of administrative diagnostic and fault recovery programs.

SOFTWARE METHODOLOGY
Explore and intitate software techniques for future switching systems development. Areas of interest include structured design techniques, high-level languages, documentation schemes and software testing mechanisms.

We offer a competitive salary, generous benefits and the assurance that you'll be in good company with an innovative leader in the design, development and manufacture of sophisticated telephone equipment and systems.

We are an equal opportunity employer. Minorities, women and handicapped are encouraged to apply. For more information, send a letter or resume, or call:

Dennis Kebrdle
Wescom, Inc.
Rockwell International
8245 S. Lemont Rd.
Downers Grove, IL 60515
(312) 985-9000, ext. 2349




Rockwell International

...where science gets down to business

Circle 62 on inquiry card.

"We designed a computer family that multiplies dealer sales."

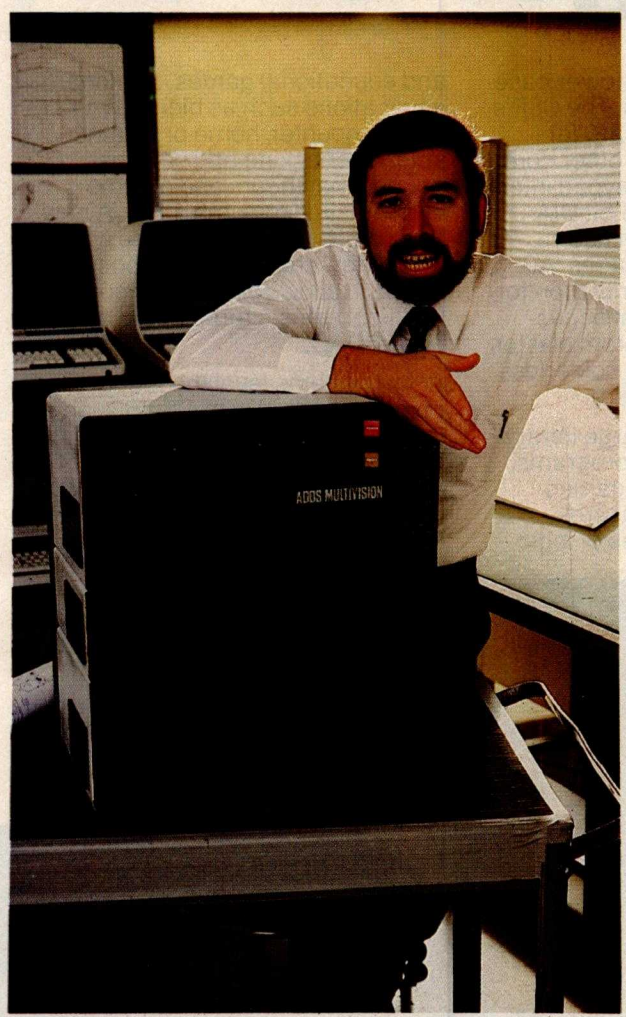

Geof Karlin
Director of Systems Development

"At ADDS, we've just designed a unique computer family that multiplies your selling power because it expands customers' computing power.

"We call it ADDS Multivision–a trio of stacking, CP/M®–compatible computers that lets users upgrade without any change in their programs. It works like this:

"MULTIVISION 1 (top module) is a get-started computer with a 5 MHz processor, 64K bytes of RAM and mini disk storage capacity of 700K bytes. It lists for $3,785 without terminal.

"MULTIVISION 2 (top and bottom modules) provides 5M or 10M bytes of hard-disk storage. Priced thousands less than other hard-disk systems, it lists for $7,995 with 5M bytes of disk.

"MULTIVISION 3 (entire stack) tops off the line, giving you a multi-user system with up to 256K bytes of RAM that supports up to four display terminals simultaneously.

"We even offer an ADDS-developed package that lets Multivision function as a word processor.

"Since its introduction at the NCC, thousands have inquired where to buy Multivision. We'd like to give them your name."

For information on dealer opportunities, write: S. Eric McErlain, Systems Division, Applied Digital Data Systems Inc., 100 Marcus Boulevard, Hauppauge, N.Y. 11787.

CP/M is a registered trademark of Digital Research, Inc.

See us at COMDEX '80, Booth 304.

ADDS

SOMETHING EXTRA IN EVERYTHING WE DO

MULTIVISION

Circle 63 on inquiry card.

Your vehicle for com
The Challenger 8P DF.

The general purpose microcomputer was first introduced as a computer for hobbyists and experimenters. However, as the industry has grown, microcomputers have become specialized for personal use or for small business use. There is virtually no computer for the serious experimenter with one important exception, the Ohio Scientific Challenger 8P.


The C8P is unique in that it incorporates the features of state-of-the-art personal computers, with the memory and disk storage capacity of business computers, along with the "mainframe" bus architecture and open ended expansion capability of industrial control computers.

Personal Computer Features

The C8P DF's specs beat all personal computers hands down. It executes instructions two to three times faster, and displays more alphabetic characters on its screen than other models. It has upper and lower case and graphics in 16 colors. The C8P's *standard* I/O capabilities are far more extensive than any other computer, with joystick and keypad interfaces, sound output, an 8-bit D/A converter, 16 parallel I/O lines, modem and printer interfaces, AC remote control and security monitor interfaces and a universal accessory port that accepts a prom blaster, 12-bit analog I/O module, solderless prototyping board and more.

Ohio Scientific offers a large library of personal applications programs, including exciting action games such as Invaders and Star Trek, sports simulations, games of logic and educational games, personal applications such as biorhythms, calorie counter, home programs such as checking and savings account balancers and a home budgeter just to name a few. A new Plot BASIC makes elaborate animations easy, and music composition program allows you to play complex multi-part music through the computers DAC.

At the systems level the machine comes standard with OS-65D, an advanced disk operating system with Microsoft BASIC and an interactive Assembler Editor. Optional software includes UCSD PASCAL and FORTRAN and an Information Management System (OS-MDMS). Dozens of independent software suppliers now also offer personal programs for the C8P.

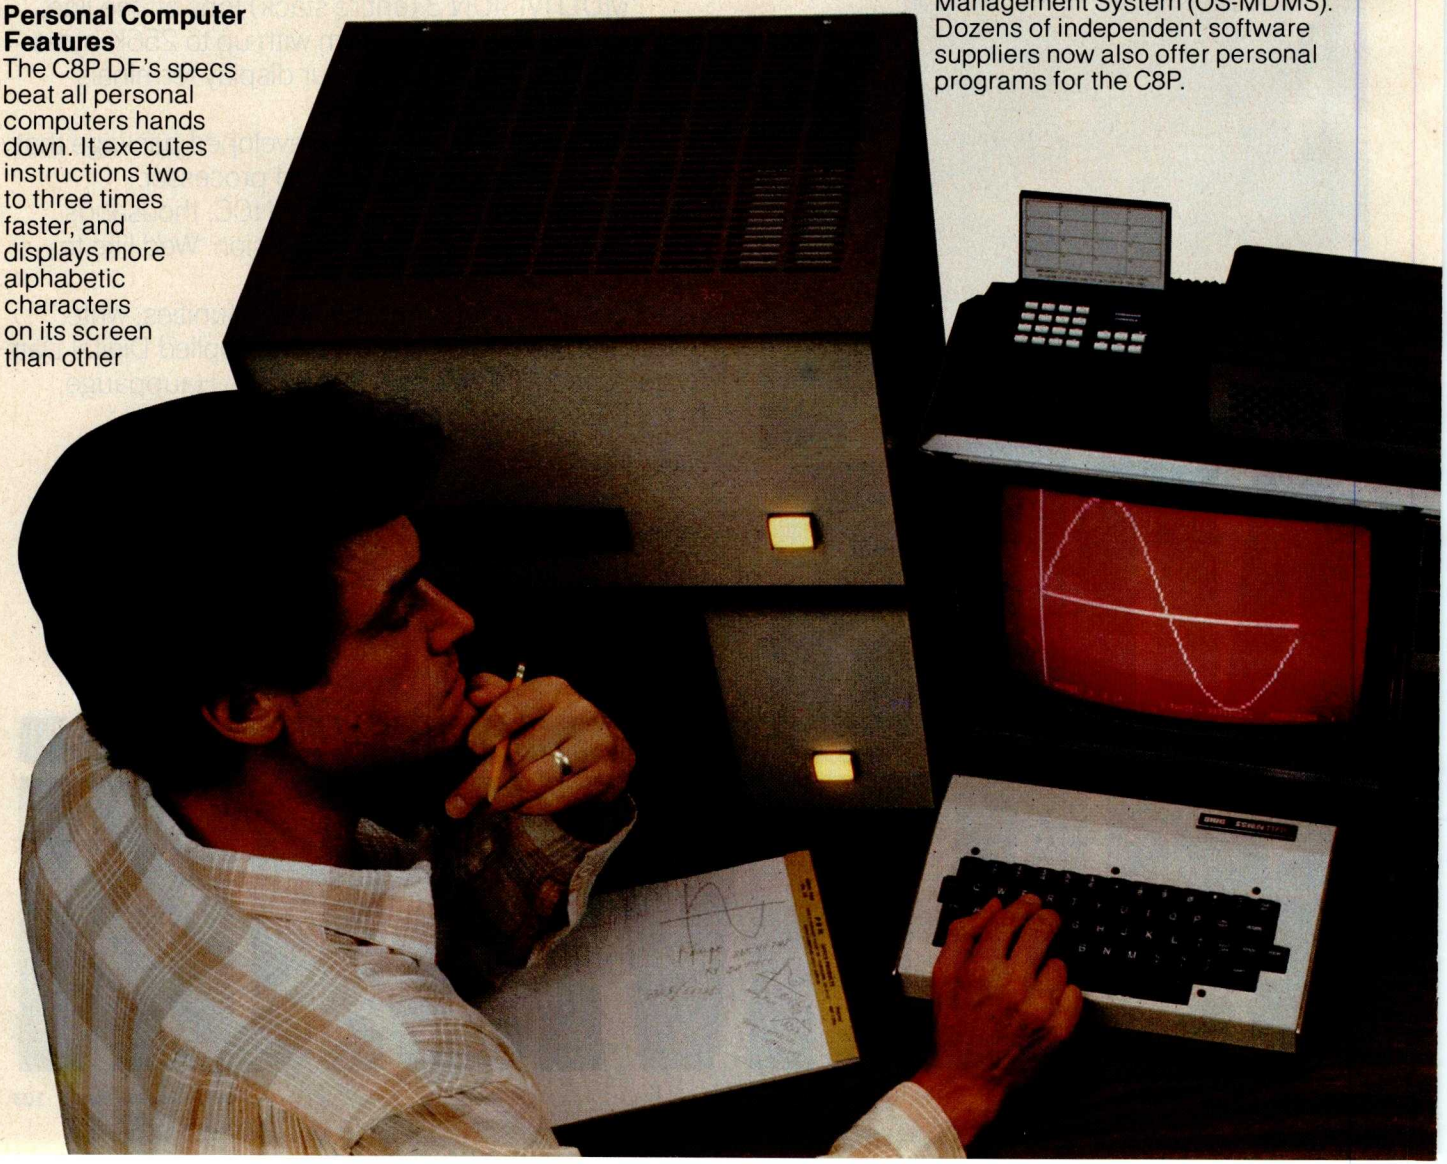

puter explorations.

Business Computer Features
The C8P DF utilizes dual 8″ floppy disk drives which store up to eight times as much information as personal computer mini-floppies, and an available double-sided option expands capacity to 1.2 megabytes of on-line storage. The C8P DF is compatible with Ohio Scientific's business computer software, including OS-65U an advanced operating system, and an Information Management System (OS-DMS) with supplementary inventory, accounting, A/R-A/P, payroll, purchasing, estimation, educational grading and financial modeling packages. The system also supports word processing (WP-3) and a fully integrated small business accounting system (OS-AMCAP V1.6). The C8P DF's standard modem and printer ports accept high-speed matrix printers and word-processing printers directly.

Home Control and Industrial Control
The C8P DF has the most advanced home monitoring and control capabilities ever offered in a computer system. It incorporates a real time clock and a unique FOREGROUND/BACKGROUND operating system which allows the computer to function with normal BASIC programs, at the same time it is monitoring external devices. The C8P DF comes standard with an AC remote control interface, which allows it to control a wide range of AC appliances and lights remotely, without wiring, and an interface for home security systems which monitors fire, intrusion, car theft, water levels and freezer temperature, all without messy wiring. In addition, the C8P DF can accept Ohio Scientific's Votrax voice I/O board and/or Ohio Scientific's new universal telephone interface (UTI). The telephone interface connects the computer to any telephone line. The computer system is able to answer calls, initiate calls and communicate via touch-tone signals, voice output or 300 baud modem signals. It can accept and decode touch-tone signals, 300 baud modem signals and record incoming voice messages. These features collectively give the C8P DF capabilities to monitor and control home functions with almost human-like capabilities.

For process control applications, a battery back up calendar clock with automatic computer restart capabilities is available. Ohio Scientific's unique accessory ports allow the connection of a nearly unlimited number of 48 line parallel I/O cards and 12-bit high speed instrumentation quality analog I/O modules to the computer by inexpensive 16-pin ribbon cables.

Exploring New Frontiers
Ohio Scientific's vocalizer software processes normal BASIC print statements with conventional spellings and speaks them clearly in real-time on computers equipped with the UTI (CA-15B or CA-14A). This voice output capability, combined with the C8P's remote control, remote sensing, telephone interface capabilities and reasonable cost open up new frontiers for computer applications.

Documentation
The C8P DF is not a beginner's computer and doesn't come with beginner's documentation. However, Ohio Scientific does offer detailed documentation on the computer which is meaningful for experts, including a Howard Sams produced hardware service manual that includes detailed block diagrams, schematics, parts placement diagrams and parts lists. Ohio Scientific is now also offering fully documented Source Code in machine readable form for OS-65D, the Challenger 8P's operating system allowing experimenters and industrial users to customize the system to their specific applications.

What's Next?
Ohio Scientific is working on a speech recognizer to complement the UTI system, with a several hundred word vocabulary. The company is also developing an 8 megabyte low-cost, add-on hard disk for use in conjunction with natural language parsing to further advance the state-of-the-art in small computers. The modular bus architecture of the C8P assures system owners of being able to make use of these new developments as they become available just as the owner of a 1976 vintage Challenger can directly plug in voice output, the UTI and other current state-of-the-art OSI products.

The C8P DF with dual 8″ floppies, BASIC and two operating systems costs about $3000, only slightly more than you would pay for a dual mini-floppy equipped personal computer with only a fraction of the capabilities of the C8P.

For more information and the name of the dealer nearest you, call 1-800-321-6850 toll free.



OHIO SCIENTIFIC
1333 SOUTH CHILLICOTHE ROAD
AURORA, OH 44202 • (216) 831-5600

Circle 64 on inquiry card.

problems. When teaching, however, the CAI program must trap errors. These fall into three types: syntax, nontermination, and logic.

To trap syntax errors, you should use the ONERROR command which transfers the control to a diagnostic section of the program that you, as a CAI author, will have provided. There you can get the error number, the erroneous argument, and even the entire ASCII text of the line in error with the GETERROR command. You can then explain the problem to the user in whatever level of detail you wish.

Indefinite loops are caught with the LOOPMAX command which sets a limit to the number of control transfers (ie: skips and GOTOs). Once the limit is exceeded, an error is generated and trapped as explained earlier. So, you can catch nonterminating programs or be very meticulous and require efficiency from advanced students by lowering the LOOPMAX appropriately.

Logic errors are trickier and the general case is impossible. However, if you choose suitable problems to solve, you can do some very nice verification. For graphic tasks, the CMPARA command can check a student's building of an image against a prototype. The CAI author can tell if the student's image is a proper subset of the prototype and let it continue. Once a stray pixel is written, CMPARA returns a value of −2 which means the image is "mixed up," and you inform the student immediately. This approach clearly falls short of genuine artificial intelligence, but it is nevertheless quite useful. Several classes at the University of Illinois at Chicago Circle have been taught with great success using a GRASS-coded prototype (called GAIN, by Tom Towle).

Conclusions

Zgrass is a language/system designed to provide easy access to computer graphics and, in general, to computing. It has sophisticated real-time structures and control capability, and it's friendly, extensible, and fun. The language is more efficient than BASIC, more user-oriented than FORTRAN or Pascal, and it has the kind of language-control structures that will help you create your mind's fantastic visualizations on your video screen with more ease than ever before. ■

Glossary

Color: *The 256 colors available in Zgrass form an abbreviated spectrum. You can get four colors on the screen at any one time. The default colors are white, red, green, and blue. They are also known as color 0, color 1, color 2, and color 3. The values are stored in $L0, $L1, $L2, and $L3 unless you modify $HB to use the right-side colors $R0, $R1, $R2, and $R3.*

Color Map: *The color map is the way Zgrass translates color 0 thru color 3 to the 256 available colors. The hardware looks at the values of $L0 thru $L3 before it writes a pixel to the screen. If it is writing a 0, it uses the color stored in $L0; if it is writing a 1, it uses the color stored in $L1, and so on. To change the color map so 1 refers to yellow instead of red, set $L1 to 127. There are actually two color maps, the $Ls and the $Rs. You get to the $Rs by setting $HB.*

Color Option: *The possible values for color option are 0 thru 15. You may need to study your truth tables for inclusive-OR and exclusive-OR (XOR) logical operations to really understand what's going on. The following is functionally true, however:*

Color Option	Meaning
0	replace with color 0 (white)
1	replace with color 1 (red)
2	replace with color 2 (green)
3	replace with color 3 (blue)
4	don't draw (actually XOR with 00)
5	XOR screen with color 1 (01 binary)
6	XOR screen with color 2 (10 binary)
7	XOR screen with color 3 (11 binary)
8	change red to white, blue to green (clear bit 0)
9	change green to white, blue to red (clear bit 1)
10	OR with 01 (if red or white, stay red; if blue or green, stay blue)
11	OR with 10 (if green or white, stay green; if red or blue, stay blue)
12	replace with red only if white were there
13	replace with green only if white or red were there
14	increment the color there by 1 (white to red, red to green, green to blue, and blue to white)
15	decrement the color there by 1 (white to blue, red to white, green to red, and blue to green)

Macro: *A string that is supposed to contain legal Zgrass commands. Most programming languages call such things "programs" or "subroutines," but we call them macros. Macros are effectively user-defined commands. Macros can behave just like commands in the sense that you can pass arguments to macros with the INPUT command and return values with the RETURN command. You define a macro just like you define a string, with an assignment to a name or by using EDIT.*

String: *A collection of characters (ie: numbers, letters, punctuation) delimited (ie: enclosed) by single or double quotes or balanced (ie: enclosed) by brackets or braces. If you have to use a string delimiter in a string, make sure that it is delimited by a different string delimiter or things will get very confused. Most likely it will consider the rest of your macro as part of the string. Examples:*

```
"THIS IS A LONGER STRING"
"PRINT A*B*C
SKIP -1 ;.THIS STRING
COULD BE A MACRO TOO"
[THIS IS HOW TO PUT A
QUOTE IN A STRING: " ' "]
[1234]
[ ]
```


Circle 65 on inquiry card. ➔

SuperSoft **First in Software Technology**

ENHANCED 'TINY' PASCAL

We still call it 'Tiny' but it's bigger and better than ever! This is the Famous Chung/Yuen 'Tiny' Pascal with more features including recursive procedures/functions & disk I/O.

'Tiny' Pascal is fast. Programs execute up to ten times faster than similar BASIC programs.

SOURCE TOO! We still distribute source, in 'Tiny' Pascal, on each discette sold. You can even recompile the compiler, add features or just gain insight into compiler construction.

'Tiny' Pascal is perfect for writing text processors, real time control systems, virtually any application which requires high speed. Requires: 36K CP/M. Supplied with complete user manual and source on discette: $85.00 Manual alone $10.00

StackWork's FORTH

A full, extended FORTH interpreter/compiler produces COMPACT, ROMABLE code. As fast as compiled FORTRAN, as easy to use as interactive BASIC.

SELF COMPILING: Includes every line of source code necessary to recompile itself.

EXTENSIBLE: Adds functions at will.

Z80 or 8080 ASSEMBLER included

Single license, OEM licensing available

Please specify CPU type: Z80 or 8080

Requires: 32K CP/M.

Supplied with extensive user manual and tutorial: $150.00

Documentation alone: $25.00

Protect your software investment by buying source! Prevent obsolescence, create custom versions, or use our systems as sources for 'library functions'.

The source code for all our programs, including the ones on this page, is available from us, either at additional cost, or if noted, included in the price. The programs on this page are distributed with machine readable source at no additional cost.

SUPERSOFT
Your Source for SOURCE

TFS—Text Formatting System

An extremely powerful formatter. More than 50 commands. Supports all major features including:

- left & right margin justification
- user defined macros
- dynamic insertion from disk file
- underlining and backspace

TFS lets you make multiple copies of any text. For example: Personalized form letters complete with name & address & other insertions from a disk file. Text is not limited to the size of RAM making TFS perfect for reports or any big job.

Text is entered using CP/M standard editor or most any CP/M compatible editor. TFS will link completely with Super-M-List making personalized form letters easy.

Requires: 24K CP/M

Source to TFS in 8080 assembler (can be assembled using standard CP/M assembler) plus user manual: $250.00.

Object code only with user manual: $85.00

Manual alone: $20.00

TERM

A complete intercommunications package for linking your computer to other computers. Link either to other CP/M computers or to large timesharing systems. TERM is comparable to other systems but costs less, delivers more and source is provided on discette!

With TERM you can send and receive ASCII and Hex files (COM too, with included conversion program) with any other CP/M computer which has TERM or compatible package. Allows real time communication between users on separate systems as well as acting as timesharing terminal.

- Engage/disengage printer
- send files
- error checking and auto retry
- receive files
- terminal mode for timesharing between systems
- conversational mode

Requires: 32K CP/M.

Supplied with user manual and 8080 source code: $110.00

Manual alone: $15.00


master charge VISA

CP/M Formats: 8" soft sectored, 5" Northstar, 5" Micropolis Mod II, Vector MZ

*CP/M REGISTERED TRADEMARK DIGITAL RESEARCH

SUPERSOFT ASSOCIATES · P.O. BOX 1628 · CHAMPAIGN, IL 61820

(217) 359-2112

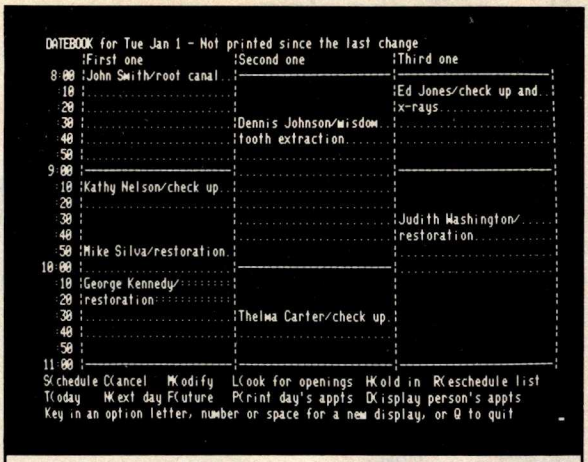

INTRODUCING DATEBOOK™

THE NEW OFFICE APPOINTMENT CALENDAR PROGRAM

DATEBOOK™ helps manage time just like a common office appointment book, but with the speed and accuracy of a computer. DATEBOOK™ eliminates the scribbles, erasures, and frustration of searching through the book for a specific opening.

DATEBOOK™ is ideal for Doctors, Dentists, Lawyers, Salesmen, Repairmen, or in any situation where time management is critical to office efficiency. Its menu display and one-key options make DATEBOOK™ one of the easiest programs to learn and use.

DATEBOOK™ features include:

- Appointment scheduling, cancelling, modifying and rescheduling.
- Automatically searches for openings according to time of day, day of week, and week of year.
- Displays all scheduled appointments for a specified person.
- Lists day's schedule (Screen or hard copy).
- Can be customized to accommodate any workday/hours schedule.

DATEBOOK™ is written in PASCAL and is available to run on CP/M as well as UCSD PASCAL systems.

(415) 455-4034

only **$295**

Dealer discounts available.



1492 Windsor Way, Livermore, CA 94550

Book Reviews

Applied Mathematical Physics With Programmable Pocket Calculators

by Robert M Eisberg
McGraw-Hill Book Company, New York NY, 1976
176 pages, softcover
$9.95

This book by Professor Eisberg of the University of California, Santa Barbara is interesting on three counts. First, it introduces the reader to numerical methods for differentiation, integration, and solution of differential equations. Second, these methods are applied to the general problems of mathematical physics, starting with the motion of an oscillator and finishing with Schrödinger's equation. Third, the programs for the solution of the equations in these fields are given for the Hewlett-Packard HP-25 and the Texas Instruments SR-56 calculators.

A reader's first reaction might be that the programs apply only to the solution of the problems of mathematical physics. However, the mathematical procedures that were aimed at these calculators may also be applied to any computer. Furthermore, the problems are in the field of physics, but the methods of solution of these problems should be of interest to the general reader.

This book discusses the derivative and methods of obtaining it, followed by programs and examples. Problems for testing the program are also given. Procedures for integration and summation are introduced with the appropriate programs and examples for solution.

The numerical procedure for the solution of second-order differential equations is developed without the great depth required for mathematical development. These equations are given for both undamped and damped motion, as well as the driven oscillator. The program development and the results obtained are interesting.

The harmonic oscillator section is followed by the coupled oscillator. The examples for the coupled oscillators and their motion are interesting not only for the study of the motion of such systems, but also for the solution of the simultaneous equations involved.

The concept of central force motion is introduced, including orbital path determination. This section concludes with alpha particle scatter due to repulsive forces. A "random" number generator program is introduced and applied to problems of entropy, or run-down evaluation.

Finally, Schrödinger's time-independent equation is introduced and evaluated, and programs are given for the harmonic oscillator and the potential well.

This is an admirable little book on mathematics applied to physics and the programming of such material for the HP-25 and SR-56 programmable calculators. It is also of great interest to the computer programmer because of the procedures discussed, which are adaptable to the computer.

WB Agocs
Department of Physical Sciences
Kutztown State College
Kutztown PA 19530

The Little LISPer

by Daniel P Friedman
Science Research Associates Inc
Palo Alto CA, 1974

Circle 66 on inquiry card.

WHY CIS COBOL LETS YOUR MICROCOMPUTER PERFORM LIKE A MAINFRAME.



Now, you can use a microcomputer for sophisticated business applications ... because now there's CIS COBOL. Micro Focus developed this COBOL so your microcomputer can run the same programs as a minicomputer or a mainframe.

CIS COBOL is Micro Focus' Compact, Interactive, Standard COBOL which offers the advantages of COBOL... powerful data structure features, English-like language, existing programmer expertise... to provide you with a full commercial language. You won't be restricted by size either: a 64K byte microcomputer will compile up to 8000 lines of COBOL, more if the program's split into dynamically loaded modules.

Choose a Compact Compiler.

The Compact compiler runs on 32K byte microcomputer systems. Its powerful subset includes full support for random, indexed and sequential files.

Or choose the Standard Compiler.

The Standard CIS COBOL compiler requires a minimum 48K of user RAM. A super-set of the Compact compiler, implementing ANSI '74 COBOL to Federal Low-intermediate Level.

The same CIS COBOL extensions for conversational working, screen control, interactive debugging, and special peripheral support are in both compilers. And there are more reasons to consider CIS COBOL:

- It conforms fully to the ANSI '74 standard, so programs are portable upwards and downwards to minis or mainframes.
- Its interactive features enable mainframe programmers to get results fast... working on inexpensive microcomputers.

Forms

The FORMS utility lets you build a screen layout online at the CRT. Then it automatically generates COBOL record descriptions for inclusion in your program.

Forms-2

A superset of FORMS, it eliminates the need to write simple data entry and inquiry programs, because the programs can be automatically generated from screen definitions.

Environment

CIS COBOL products run on the 8080 or Z80 microprocessors under the CP/M* operating system, and on the LSI-11 or PDP-11 processors under RT-11. They are distributed in a variety of disk formats and come with a utility that enables you to use any make of CRT.

OEMs

Intel has adopted CIS COBOL and offers it (as iCIS-COBOL) for their Intellec and Intellec II systems. Ideal for OEM's or private label, CIS COBOL was developed entirely by Micro Focus. Send inquiries for CIS COBOL object packs and application vendor terms to MICRO FOCUS or its licensed distributors. Distributor terms also available from MICRO FOCUS.

Send me more information for: B11
☐ Single Copy Users
☐ Reseller and Distributor Licensing

Name_____
Title_____
Company_____
Address_____
City/State_____
Zip/Phone_____
Computer Model_____
Version of DOS_____



Micro Focus Inc. • 1601 Civic Center Drive • Santa Clara • CA 95050 • Tel: (408) 984-6961 • Telex: 171-135 MISSION SNTA

U.K. Office • 58 Acacia Road • St. Johns Wood • London NW8 6AG • Tel: 01 722 8843 • Telex: 228536 MICROF G

CIS COBOL distributors include: Vector Graphic, Onyx Systems, Altos Computer Systems, Lifeboat Associates, Research Machines, Telecomputing, Modular Business Systems, Rair, Midlectron, Rostronics and Johnson-Laird Inc. †Intellec is a trademark of Intel Corp. *CP/M is a trademark of Digital Research Inc.

58 pages, softcover
$3.95

It might seem a little odd to review a six-year-old book, but there is a good reason for it in this case: LISP has only recently become available for microcomputers. John Allen (guest editor of the August 1979 BYTE special issue on LISP) has promised that his LISP Company will unveil a full line of LISP systems. It will start with a Z80 version and proceed to much more capable LISPs for the new 16-bit microprocessors. Also, LISP interpreters from other sources exist for Z80, 6800, and AM-100 processors.

The next question is how does one learn LISP? Reference manuals give too much detail and not enough feel for the language. Most introductory material gives too little detail and not enough feel for the language, and nearly all books on LISP make the mistake of telling the student what LISP functions are and what they do instead of how to use them. There is an alternative to all this. One can obtain *The Little LISPer*, study it for a short time, and come away with a firm grasp of the essentials of LISP. This grasp is sufficient to make sense out of the rest of the material concerning LISP and LISP-based systems that one might encounter.

The Little LISPer was originally written to provide a two-week course for nonprogrammers.It is one of the best introductions to any language that I have ever read. I went straight through it the day I got it. The sequence of topics (interleaving functions, data structures, programming principles, recursive programming techniques) is laid out with a deft touch that has the student progressing much faster than he realizes. This organization of the material allows the reader to build up a sophisticated sense of the patterns inherent in LISP structures almost without noticing.

Other features that contribute to the relaxed, but speedy, progress of the student are the organization of the entire text into carefully constructed sets of questions and answers and the light humorous touch of the examples.

LISP operates on list structures, and most of the data used in the book are lists of foods. One of the problems for the reader is to determine the list that results from inserting the atom ROAST after the atom CHUCK in a list beginning:

(HOW (MUCH WOOD). . .

Unfortunately the text breaks off too soon, leaving the reader with a clear sense of things he was just about ready to do, but will have to find out about elsewhere. In any case, the author says the reader is "better prepared than he realizes" to learn the details of a full LISP system and many more advanced programming techniques. It is only necessary to become familiar with the full range of features of a complete LISP system before diving into the world of artificial intelligence and numerous other fields.

LISP is a realization and extension (in notation, not computing power) of Church's lambda calculus, one of the most powerful mathematical tools in existence. It is generally considered a remarkable achievement to teach a powerful mathematical technique to nonmathematicians. As far as I am concerned, though, this kind of teaching should be normal, and the usual "math is hard and you're too dumb to learn it" approach should be thrown away. The fact is that most people are not too dumb to learn mathematics of whatever sort, but few people are clever enough to learn improperly presented mathematics. It seems that even fewer are clever enough to present it well. I am delighted to have an opportunity to point out an instance of top-quality textbook writing and to offer my congratulations to Daniel Friedman.

Mokurai Cherlin
APL Business Consultants Inc
POB 1131
Mt Shasta CA 96067

Mathematical Elements for Computer Graphics

by David Rogers and J Alan Adams
McGraw-Hill Book Company, New York NY, 1976
Softcover, 239 pages
$12.95

One of the ironies of computer graphics is that it is the aspect of computer use that most attracts people who do not like mathematics, while it is one of the few fields of computing (contrary to popular belief) that require mathematics. *Mathematical Elements for Computer Grapics* is a good sourcebook of the mathematics, the formulae, and the algorithms required to implement graphics packages and applications on computers of any size. It is especially well suited to personal-computer use, since all of the algorithms are presented in BASIC.

Rogers and Adams assume several things about the reader. First, they assume that the reader is writing, or wants to write, software for a line-drawing display (such as those produced by Tektronix). If you have a television-technology display (like most small-computer users), you will need to devise the software to make it draw lines. They also assume that the reader has a substantial background in mathematics. Unfortunately for this subject, a substantial mathematical background means three terms of college-level calculus plus matrix algebra. Also, the algorithms are presented in Dartmouth BASIC, which requires a fair amount of conversion before it will

the electric pencil II™
©1980 Michael Shrayer
for the TRS-80 Model II* Computer



The Electric Pencil is a Character Oriented Word Processing System. This means that text is entered as a continuous string of characters and is manipulated as such. This allows the user enormous freedom and ease in the movement and handling of text. Since lines are not delineated, any number of characters, words, lines or paragraphs may be inserted or deleted anywhere in the text. The entirety of the text shifts and opens up or closes as needed in full view of the user. Carriage returns as well as word hyphenation are not required since each line of text is formatted automatically.

As text is typed and the end of a screen line is reached, a partially completed word is shifted to the beginning of the following line. Whenever text is inserted or deleted, existing text is pushed down or pulled up in a wrap around fashion. Everything appears on the video display screen as it occurs thereby eliminating any guesswork. Text may be reviewed at will by variable speed or page-at-a-time scrolling both in the forward and reverse directions. By using the search or the search and replace function, any string of characters may be located and/or replaced with any other string of characters as desired. Specific sets of characters within encoded strings may also be located.

When text is printed, The Electric Pencil automatically inserts carriage returns where they are needed. Numerous combinations of Line Length, Page Length, Character Spacing, Line Spacing and Page Spacing allow for any form to be handled. Right justification gives right-hand margins that are even. Pages may be numbered as well as titled.

the electric pencil
–a Proven Word Processing System


The TRSDOS versions of The Electric Pencil II are our best ever! You can now type as fast as you like without losing any characters. New TRSDOS features include word left, word right, word delete, bottom of page numbering as well as extended cursor controls for greater user flexibility. BASIC files may also be written and simply edited without additional software.

Our CP/M versions are the same as we have been distributing for several years and allow the CP/M user to edit CP/M files with the addition of our CONVERT utility for an additional $35.00. CONVERT is not required if only quick and easy word processing is required. A keyboard buffer permits fast typing without character loss.

	CP/M	TRSDOS
Serial Diablo, NEC, Qume	$ 300.00	$ 350.00
All other printers	$ 275.00	$ 325.00

The Electric Pencil I is still available for TRS-80 Model I users. Although not as sophisticated as Electric Pencil II, it is still an extremely easy to use and powerful word processing system. The software has been designed to be used with both Level I (16K system) and Level II models of the TRS-80. Two versions, one for use with cassette, and one for use with disk, are available on cassette. The TRS-80 disk version is easily transferred to disk and is fully interactive with the READ, WRITE, DIR, and KILL routines of TRSDOS.

TRC	Cassette	$ 100.00
TRD	Disk	$ 150.00



Features

TRSDOS or CP/M Compatible * Supports Four Disk Drives * Dynamic Print Formatting * Diablo, NEC & Qume Print Packages * Multi-Column Printing * Print Value Chaining * Page-at-a-time Scrolling * Bidirectional Multispeed Scrolling * Subsystem with Print Value Scoreboard * Automatic Word & Record Number Tally * Global Search & Replace * Full Margin Control * End of Page Control * Non Printing Text Commenting * Line & Paragraph Indentation * Centering * Underlining * Boldface

VISA master charge


*TRS-80 is a registered trade mark of Radio Shack, a division of Tandy Corp.

MICHAEL SHRAYER SOFTWARE, INC.
1198 Los Robles Dr.
Palm Springs, CA. 92262
(714) 323-1400

Circle 67 on inquiry card.
Circle 68 on inquiry card.

When It Comes To Add-on Memory...

LOBO Has It All.

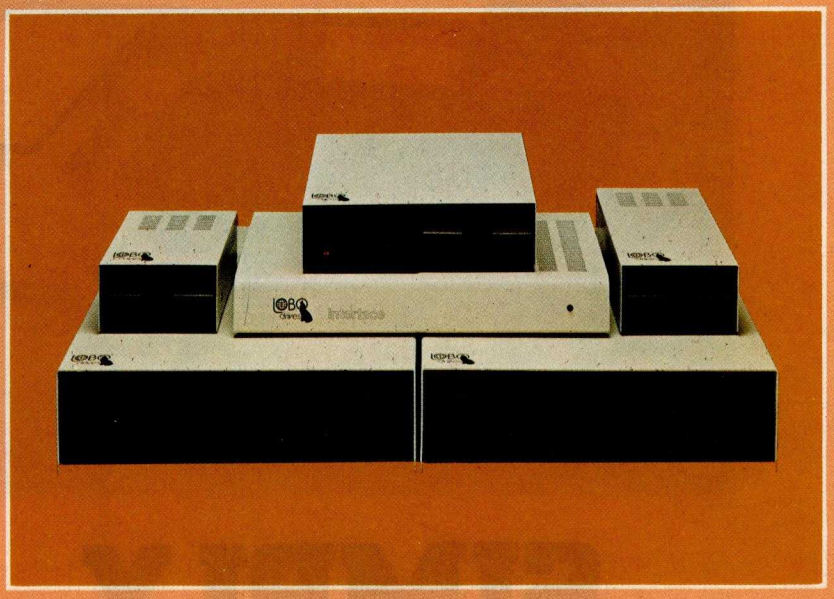

LOBO DRIVES manufactures a full line of S-100 computer compatible disk drives. All drives are software compatible with most S-100 disk operating systems and applications software programs. Only LOBO DRIVES offers you the variety and choice of floppy and fixed disk drives. Choose from 5¼ and 8-inch floppies, 5¼ and 8-inch Winchester technology fixed disk drives, and several Floppy/Fixed disk combinations. Each LOBO DRIVES system is thoroughly tested and burned-in and has the famous LOBO DRIVES One Year, 100% Parts/Labor Warranty.

MODEL 400 5¼-INCH FLOPPY DISK MEMORY SYSTEM

A high-speed (298) Msec Access), high-reliability (8000 hrs MTBF), low-cost floppy disk memory system. It is available in both soft and hard sector formats, and a choice of single or double density configurations.

- Up to 220 KBytes Capacity
- Single/Double Density
- Soft Sector Format
- Complete Software Compatibility

MODEL 800/850 DUAL FLOPPY DISK DRIVE MEMORY SYSTEM

LOBO DRIVES offers you a choice of single-sided, single or double density (Model 800) or double-sided, single or double density (Model 850) dual 8-inch memory subsystems. Each system comes complete with chassis and power supply, cables, controller and interface.

- Compatible with Most S-100 DOS Systems
- Up to 3.2 MByte Capacity

MODEL 1850 DUAL FLOPPY/FIXED DISK MEMORY SYSTEM

No more worries about back-up. LOBO DRIVES has combined the latest state-of-the-art Winchester technology with the proven reliability and dependability of its Model 850 8-inch floppy disk drive to bring you the ultimate in memory expansion for your S-100 computer. The Model 1850 is the ideal memory system for small business and word processing applications.

- 5 or 10 MByte Fixed Disk Capacity
- 1.6 MByte Floppy Disk Capacity
- Software Compatibility
- Sealed Environment
- Winchester Reliability
- 70 Msec Average Access Time

MODEL 950 DUAL FLOPPY/FIXED DISK MEMORY SYSTEM

All the advantages of Winchester technology fixed disk memory: large capacity (6.38 MBytes), high speed (170 Msec avg. access time), and extended reliability, combined with the convenience of a built-in floppy disk back-up in one cabinet. Only LOBO can bring you the storage capacity of 16 mini-floppies at a fraction of the price.

- The Storage Capacity of 16 Mini-Floppies
- Built-in Back-up
- 170 Msec Access (Avg)
- Software Compatibility

See your nearest dealer, call, or write for the complete LOBO DRIVES story... find out just how competitively priced a quality drive can be.

LOBO drives INTERNATIONAL

935 Camino Del Sur
Goleta, California 93017
(805) 685-4546
Telex: 658 482



SIMPLY BEAUTIFUL.

CF&A furniture looks terrific. But beauty is more than skin deep. That's why our line of desks, stands, and enclosures also features rugged construction, low cost, and quick delivery. In a wide range of sizes and configurations. With accessories to meet your individual requirements. With a smile and a thank you.

Call CF&A. We make it simple. We make it beautiful.

CF&A

Computer Furniture and Accessories, Inc.
1441 West 132nd Street
Gardena, CA 90249
(213) 327-7710

work in Microsoft BASIC or BASIC-E.

For those of you who have not yet been scared off, you will learn algorithms and techniques for: scaling, rotation, curve representation, three-dimensional displays, three-dimensional transformation, and surface description and display. Of course, I am only summarizing; Rogers and Adams break these topics down into 65 sections, plus algorithms.

So why buy (or borrow) this book ? If you want a text to teach yourself computer graphics, this is the wrong book. It will not really tell you how to put all of the algorithms together into a usable package or application. But, if you already know something about computer graphics and need a reference to give or compare formulae and algorithms, then this is definitely the right book. A caveat is in order: I have not checked any of the algorithms or programs for typographical accuracy. Which is to say, it's a good reference, but not a good text. ■

John A Lehman
716 Hutchins #2
Ann Arbor MI 48103

BYTE's Bugs

Duplicated NAND Gate


A drafting error marred Steve Ciarcia's article "A Build-It-Yourself Modem for Under $50" (August 1980 BYTE, page 22). The pin numbers for a section of an integrated circuit were incorrectly marked, duplicating the numbers for a different section.

In figure 1b on page 28, the NAND gate of IC4c should have had its input indicated as being on pins 8 and 9, with output on pin 10. The pin numbers for IC4d are correct as shown. ■

Circle 69 on inquiry card.

Very sharp printout at very low payout

$595*

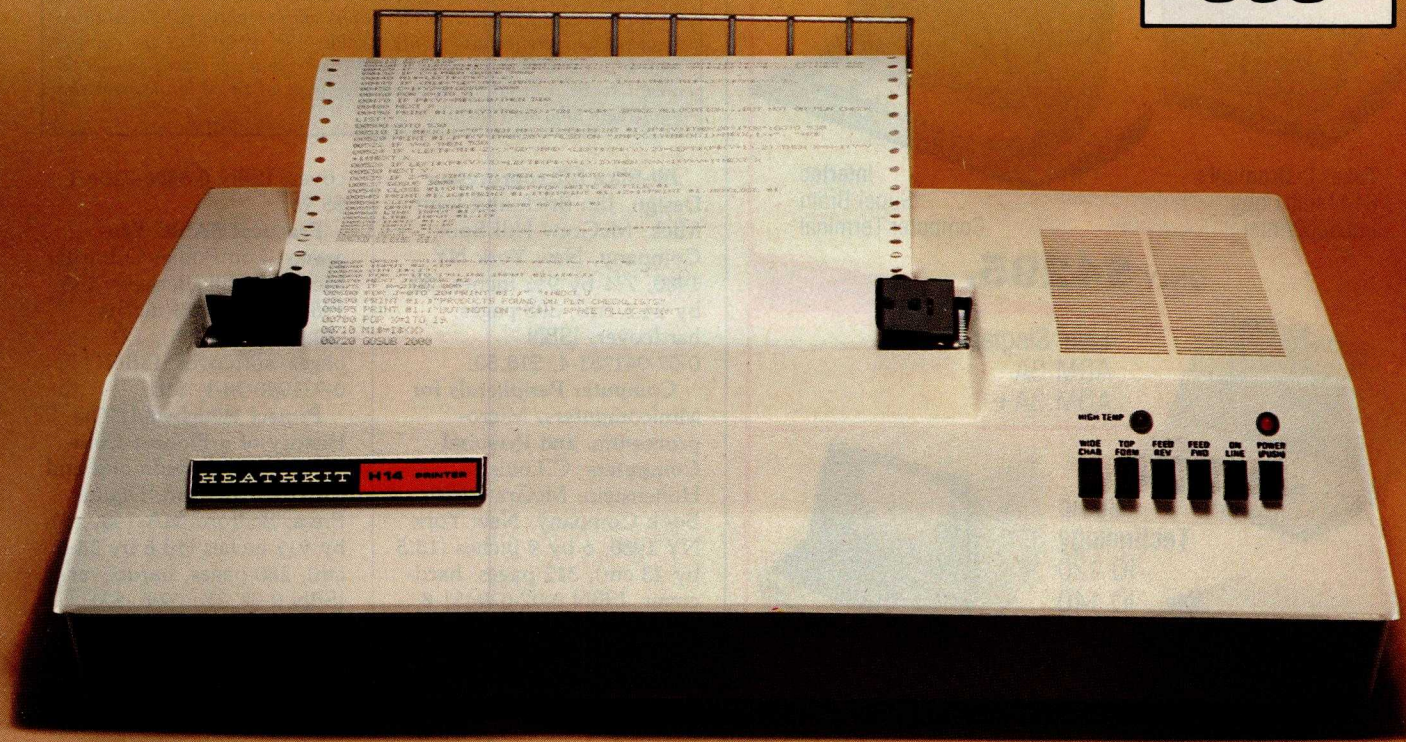

The Heath H-14 Printer gives you high-performance features at one of the lowest prices anywhere...

- 5 x 7 dot matrix and high quality impact printhead give you clear, easy-to-read images
- Standard 96-character ASCII set, UPPER and lower case
- Operator or software-selectable line widths; 132, 96, or 80 characters
- Compatibility with any computer having RS-232C or 20 mA current loop serial interface, with handshaking
- Sprocket paper feed, with adjustable spacing, to keep paper moving smoothly
- Sustainable print speed approximately 30 characters per second
- "Paper jammed" and "paper out" signals to prevent loss of data
- Selectable baud rates from 110 to 4800
- Convenience of standard fan-fold paper, 2.5 to 9.5 inches wide
- Chrome wire rack to keep paper neat

The H-14's remarkable price includes connecting cables, paper rack, paper, and ribbon – so you're all ready to run. And service for the H-14 is available at 61 Heathkit Electronic Centers in the U.S. or Canada.

Check out the microprocessor-based H-14 Printer today, in kit form or factory assembled. You'll find complete details in the newest, FREE Heathkit Catalog. Send for yours today, or pick one up at the nearest Heathkit Electronic Center. **Dealer inquiries on assembled units are invited, too.**

Complete service, so you're never left out in the cold

Heath®
Computer Systems




Send for FREE Catalog

Write to: Heath Company, Dept. 334-716 Benton Harbor, MI 49022

Visit your Heathkit Service Center

H-14 Printers are on display at the 61 Heathkit Electronic Centers throughout the U.S. and Canada. See your telephone white pages for the location nearest you.



In the U.S. Heathkit Electronic Centers are units of Veritechnology Electronics Corporation.


*In kit form, FOB Benton Harbor, MI. Also available completely assembled at $895.00, FOB Benton Harbor. Prices subject to change without notice.

CP-191

Circle 70 on inquiry card.

SYNCHRO-SOUND
THE COMPUTER PEOPLE


A PERFECT SUPER SPECIAL MATCHED PAIR!

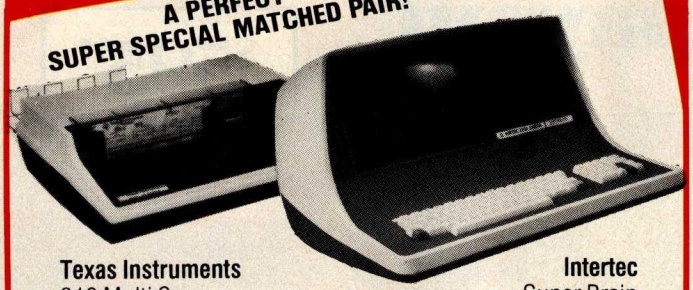

Texas Instruments
810 Multi Copy
Impact Printer

Intertec
Super Brain
Computer Terminal

ONLY **$4295.**




Lear Siegler
ADM 3A
ADM 3A+




Soroc Technology
IQ 120
IQ 140



DECwriter IV
LA34



Okidata
Microline 80



Northstar
Horizon II
Horizon II Quad

Many of our prices are too low to advertise!
PLEASE CALL OR WRITE

We carry a full line of: ADDS, QUME, TELETYPE, CROMEMCO, FLORIDA DATA SYSTEMS, SCOTCH, MAXELL, VERBATIM, ALPHA-MICRO, ATARI, INTEGRAL DATA, LIVERMORE COUPLERS, HAZELTINE, TEXAS INSTRUMENTS, DIGITAL MICRO SYSTEMS and others.

SSE
SYNCHRO-SOUND
ENTERPRISES, INC.
THE COMPUTER PEOPLE

193-25 Jamaica Ave.
Jamaica, New York 11423
TWX 710-582-5886

PHONE ORDERS CALL:
New York 212/468-7067
Los Angeles 213/628-1808
Chicago 312/641-3010
Dallas 214/742-6090

Books Received

The following is a list of books received at BYTE Publications during this past month. Although the list is not meant to be exhaustive, its purpose is to acquaint BYTE readers with recently published titles in computer science and related fields. We regret that we cannot review or comment on all the books we receive; instead, this list is meant to be a monthly acknowledgement of these books and the publishers who sent them.

Bit-Slice Microprocessor Design, Jim Brick and John Mick; McGraw-Hill Book Company, New York NY 1980; 7¾ by 9½ inches (20 by 24.5 cm), 398 pages, hardcover, ISBN 0-07-041781-4, $18.50.

Computer Peripherals for Minicomputers, Microprocessors, and Personal Computers, C Louis Hohenstein; McGraw-Hill Book Company, New York NY 1980; 6 by 9 inches (15.5 by 23 cm), 312 pages, hardcover, ISBN 0-07-029451-8, $19.50.

Early British Computers, Simon Lavington; Digital Press, Bedford MA 1980; 5¾ by 8¼ inches (15 by 21 cm), 130 pages, softcover, ISBN 0-932376-08-8, $8.

A Guide to Structured COBOL with Efficiency Techniques and Special Algorithms, Pacifico A Lim; Van Nostrand Reinhold, New York NY 1980; 6 by 9 inches (15.5 by 23 cm); 272 pages, hardcover, ISBN 0-442-24585-8, $18.95.

Master Handbook of Electronic Tables & Formulas, third edition, Martin Clifford; Tab Books, Blue Ridge Summit PA 1980; 6 by 8¼ inches (15.5 by 21 cm), 313 pages, softcover, ISBN 0-8306-1225-4, $8.95.

More Chess and Computers: The Microcomputer Revolution, The Challenging Match, David Levy, Monroe Newborn; Computer Science Press, Potomac MD 1980; 5¼ by 8⅜ inches (13.5 by 20.5 cm), 117 pages; softcover, ISBN 0-914894-07-2, $12.95.

Practical Area Navigation, Paul Garrison; Tab Books, Blue Ridge Summit PA 1980; 6 by 9¼ inches (15.5 by 23 cm), 224 pages; softcover, ISBN 0-8306-2286-1, $5.95.

Practical BASIC Programs, Lon Poole; Osborne/McGraw-Hill, Berkeley CA 1980; 8⅜ by 10⅞ inches (20.5 by 26.6 cm), 171 pages, softcover, ISBN 0-931988-38-1, $15.

Project Whirlwind: The History of a Pioneer Computer, Kent C Redmond and Thomas M Smith; Digital Press, Bedford MA 1980; 7⅝ by 9½ inches (18.6 by 24.5 cm), 280 pages, hardcover, ISBN 0-932376-09-6, $21.


Some Common BASIC Programs, third edition, Mary Borchers and Lon Poole; Osborne/McGraw-Hill, Berkeley CA 1980; 8⅜ by 10¾ inches (20.5 by 27.5 cm), 195 pages; softcover, ISBN 0-931988-06-3.

Structured BASIC and Beyond, Wayne Amsbury; Computer Science Press, Potomac MD 1980; 6 by 9 inches (15.5 by 23 cm), 310 pages, softcover, ISBN 0-914894-16-1, $10.95.■

BYTE's Bugs

The First Shall Be Last

The Washington Area Computer Society (WACS) meets on the *last* Friday of the month (not the first) on the campus of the Catholic University of America in Washington, DC, in the first-floor lecture room in Keane Hall, starting at 7:30 PM. Incorrect information about the meeting time had been published in a past issue of BYTE.■

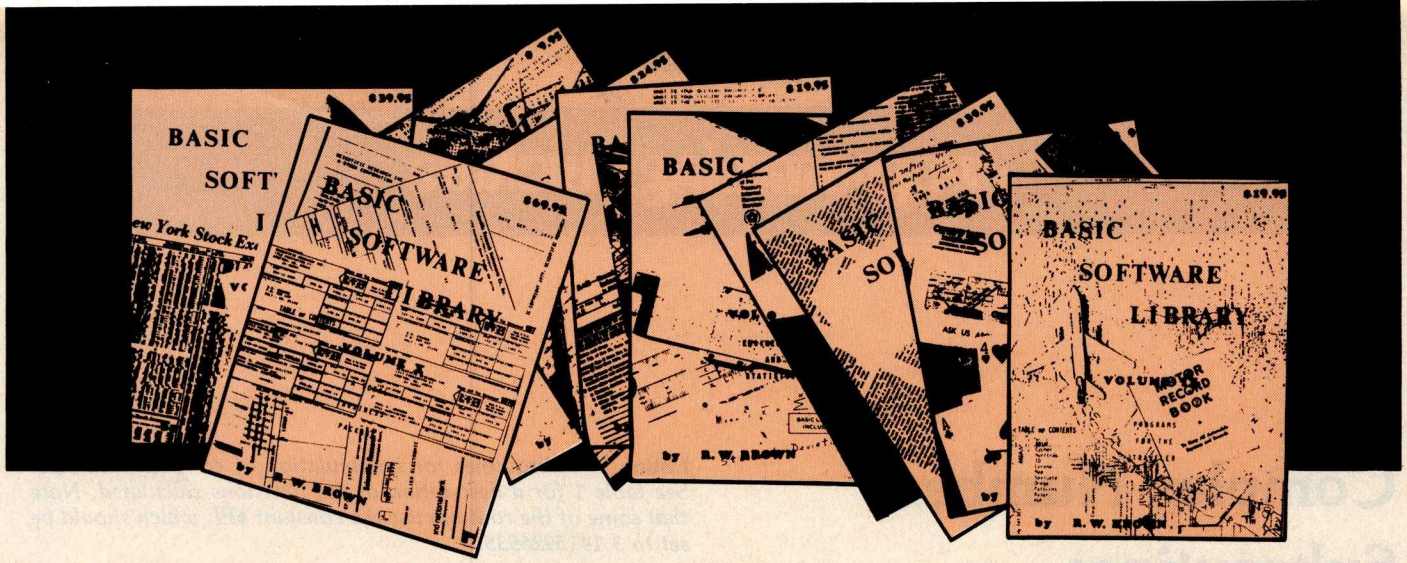

BASIC SOFTWARE LIBRARY

NOW ★ 10 ★ Volumes and Growing

WHY Pay hundreds of dollars for Software that does Not work when WE offer the BEST available Software for only a few dollars a program. And what is better OURS WORKS!

We have over 100,000 in circulation since 1975 and we are still around and That's more than Anyone else can say. We used to sell hundreds of programs individually, the programs in Volume X were sold for several years at over $10,000, in Volume III for over $6,000 but a few years ago we decided to promote software to the mass public and it was an instant success.

For Homeowners, Businessmen, Engineers, Hobbyists, Doctors, Lawyers, Men and Women

Vol. I $24.95

Business & Personal Bookkeeping Programs
Bond
Building Compound
Cyclic
Decision 1
Decision 2
Depreciation
Efficient Flow
Installment Interest
Investments
Mortgage
Optimize Order
Pert Tree
Rate
Return 1
Return 2
Schedule 1

Games & Pictures
Animals Four
Astronaut
Bagel
Bio Cycle
Cannons
Checkers
Craps
Dogfight
Golf
Judy
Line Up
Pony
Roulette
Sky Diver
Tank
Teach Me

A. Newman
J.F.K.
Linus
Ms. Santa
Nixon
Noel Noel
Nude
Peace Policeman
Santa's Sleigh
Snoopy
Virgin

Vol. II $24.95

Binomial
Chi-Sq.
Coeff.
Confidence 1
Confidence 2
Correlations
Curve
Differences
Dual Plot
Exp-Distri
Least Squares
Paired
Plot
Plotpts
Polynomial Fit
Regression
Stat 1
Stat 2
T-Distribution
Unpaired
Variance 1
Variance 2
XY.

APPENDIX A

Beam
Conv.
Filter
Fit
Integration 1
Integration 2
Intensity
Lola
Macro
Max. Min.
Navaid
Optical
Planet
PSD
Rand 1
Rand 2
Solve
Sphere Trian
Stars
Track
Triangle
Variable
Vector

Vol. III $39.95

Billing
Inventory
Payroll
Risk
Schedule 2
Shipping
Stocks
Switch

Vol. VI $49.95

Mini-Ledger
Payroll
A/R
Inventory
Peprec.
Ledger

Vol. VII $39.95

Chess
Medbil
Wdproc
Utility

Vol. IV $9.95

Bingo
Bonds
Bull
Enterprise
Football
Funds 1
Funds 2
Go-Moku
Jack
Life
Loans
Mazes
Poker
Popul
Profits
Qubic
Rates
Retire
Savings
SBA
Tic-Tac-Toe

Vol. V $9.95

Andy Cap
Baseball
Compare
Confid 10
Descrip
Differ
Engine
Fourier
Horse
Integers
Logic
Playboy
Primes
Probal
Quadrac
Red Baron
Regression 2
Road Runner
Roulette
Santa
Stat 10
Stat 11
Steel
Top
Vary
Xmas

APPENDIX B

Vol. VIII • $19.95

1040-Tax
Balance
Checkbook
Instol 78
Deprec 2
APPENDIX C
Favorites

Vol. IX $19.95

Auto
Cypher
Hurrtrac
ID
Lorana
Map
Navigate
Omega
Patterns
Radar
RDF

Vol. X $69.95

Intro.
A/R
A/P
Mer Inv
Check
Assets
Payroll
Bal Sh
P/L
Year End
Data Base
Tax Up
Basic St.

Almost every single program included in these volumes will run in every Computer system that operates in Basic. A few changes may be required for some Basics but most of these changes are covered in one of the Tables and Appendices included in Volumes III, V, VI, VIII, and X.

Volume VI — Disk programs are compatible with TRS-80 disk basic

The disk programs in Volumes VI, VII and X are written in (CP/M) M Basic and Disk Extended Microsoft Basic. Other programs written in 8K Basic.

★SPECIAL BONUS★ 15% discounts on single purchase of full set by December 31st, 1980

Unconditional Money Back Guarantee.

Add $1.50 per volume handling, all domestic shipments sent U.P.S. except APO and P.O. Box which go parcel post. Foreign orders add $6.00/volume for air shipment and make payable in U.S. dollars only.

AVAILABLE AT MOST COMPUTER STORES
Master Charge and Bank Americard accepted.
Our Software is copyrighted and may not be reproduced or sold.

Unlike others we have NOT raised our prices in five years

KEMCO, LTD.
P.O. Box 2096L Ashland, VA 23005
Sales HOT LINE 1-804-798-1147

IN GERMANY
Ing. W. Hofacker, GmbH
Holzkirchen, W. Germany

IN HOLLAND
Nanton Press B.V.
Bilthoven, Holland

OVER 116,000 IN USE TODAY

Complex Number Subroutines

William R Harlow, Department of Mechanical and Industrial Engineering, 836 Rhodes Hall, University of Cincinnati, Cincinnati OH 45221

I teach numerical methods to engineering students at the University of Cincinnati, where we have an Amdahl computer. Also, various departments have purchased Heath, IMSAI, Radio Shack, and Wang systems. Although the big system has built-in hardware to perform complex operations, the smaller systems must have them implemented as subroutines.

Besides the four fundamental operations of addition, subtraction, multiplication, and division, there are several important functions of a complex variable. These include log(z), e^z, sin(z), cos(z), z^p, and others. Since addition and subtraction are so easy to handle, they are not included in the routines listed here.

Listing 1 gives a set of BASIC routines to do the complex operations listed in table 1. Other functions not

Listing 1: *Subroutines for manipulation of complex numbers. See table 1 for a description of the functions calculated. Note that some of the routines use the constant #PI, which should be set to 3.1415926535.*

```
1000 REM
1010 M1=A1*A2-B1*B2:M2=A1*B2+A2*B1:RETURN
2000 REM
2010 D=A2↑2+B2↑2
2020 Q1=(A1*A2+B1*B2)/D:Q2=(A2*B1-A1*B2)/D:RETURN
3000 REM
3010 R=SQR(A1↑2+B1↑2):I=SGN(A1)+3*SGN(B1)+4
3020 ON I GOTO 3050,3060,3070,3110,3080,3090,3100,3060
3030 B=ARCTAN(B1/A1)-#PI:GOTO 3120
3050 B=(-#PI/2):GOTO 3120
3060 B=ARCTAN(B1/A1):GOTO 3120
3070 B=#PI:GOTO 3120
3080 B=0:GOTO 3120
3090 B=#PI+ARCTAN(B1/A1):GOTO 3120
3100 B=#PI/2:GOTO 3120
3110 P1,P2=0:GOTO 3120
3120 R0=P*LOG(R):R=EXP(R0)
3130 P1=R*COS(P*B):P2=R*SIN(P*B):RETURN
4000 REM
4010 I=SGN(A1)+3*SGN(B1)+4
4020 IF I=4 THEN 4120
4030 L=.5*LOG(A1↑2+B1↑2)
4040 ON I GOTO 4060,4070,4080,4120,4090,4100,4110,4070
4050 L2=ARCTAN(B1/A1)-#PI:GOTO 4130
4060 L2=(-#PI/2):GOTO 4130
4070 L2=ARCTAN(B1/A1):GOTO 4130
4080 L2=(#PI):GOTO 4130
4090 L2=0:GOTO 4130
4100 L2=#PI+ARCTAN(B1/A1):GOTO 4130
4110 L2=#PI/2:GOTO 4130
4120 PRINT "LOG(Z) IS UNDEFINED":STOP :RETURN
4130 L1=L:RETURN
5000 REM
5010 E1=EXP(A1)*COS(B1):E2=EXP(A1)*SIN(B1):RETURN
6000 REM
6010 U1=(EXP(B1)-EXP(-B1))/2:U2=(EXP(B1)+EXP(-B1))/2
6020 S1=SIN(A1)*U2:S2=COS(A1)*U1:RETURN
7000 REM
7010 U1=(EXP(B1)-EXP(-B1))/2:U2=(EXP(B1)+EXP(-B1))/2
7020 C1=COS(A1)*U2:C2=SIN(A1)*(-U1):RETURN
8000 REM
8010 IF B1<>0 THEN 8050
8020 IF A1<0 THEN 8040
8030 R1=SQR(A1):R2=0:RETURN
8040 R1=0:R2=SQR(-A1):RETURN
8050 R=SQR(A1↑2+B1↑2)
8060 R1=SQR((R+A1)/2):R2=SGN(B1)*SQR((R-A1)/2):RETURN
```

Line Number	Operation type	Input; Use	Other Variables Used	Output
1000	product $z_1 \times z_2$	A1,B1;A2,B2		M1,M2
2000	quotient z_1 / z_2	A1,B1;A2,B2	D	Q1,Q2
3000	power z^p	A1,B1	P,R,I,B	P1,P2
4000	natural logarithm Ln z	A1,B1	I,L	L1,L2
5000	exponential e^z	A1,B1		E1,E2
6000	sine sin z	A1,B1	U1,U2	S1,S2
7000	cosine cos z	A1,B1	U1,U2	C1,C2
8000	square root $z^{1/2}$	A1,B1	R	R1,R2

Table 1: *Table of complex number operations performed by subroutines in listing 1. In the "Input" column (A1, B1) refers to the complex number A1+B1i, where i is the square root of −1. In the "Output" column, the two numbers listed are the real and imaginary parts of the answer; eg: the output variables M1 and M2 of the multiplication routine mean that the result of the multiplication is the complex number M1+M2i.*

The best in data base management for your micro-computer

Get the most out of your micro-computer. Use our advanced and progressive data management system.

HDBS is an extended hierarchical data base system offering
- fixed length records
- file-level read/write protection
- one-to-many set relationships


MDBS is a full network data base system offered as an upgrade from HDBS...or it may be ideal as your initial system. **Unique and versatile,** it adds these features:
- full network CODASYL-oriented data structures
- variable length records
- multiple levels of read/write protection
- one-to-one, many-to-one, and many-to-many sets
- non-redundancy of data, easy updating
- occurrences of a record type may own other occurrences of the same type
- a single set may have multiple owner and member record types

MDBS-DRS. As an add-on to MDBS, the DRS system offers extraordinary flexibility in data base restructuring to meet new needs.
- Item, record, and set types can be added, deleted, or renamed in an existing data base as well as other data base characteristics. You can redesign the data base after it is already on-line!

MDBS-RTL. As an add-on to MDBS, the RTL (Recovery Transaction Logging) logs all data base transactions, so that in the event of a system failure, the data base can be recovered with minimal loss of information.
- The recovery processor permits selective reloading of the data base from the transaction file. Users can log messages, indicate complex transaction sequences, and effect selective control over the recovery process.

MDBS-QRS. An interactive Report-Writer/Query-System for HDBS/MDBS data bases. Features...
- may be customized for non-technical users
- complex retrieval conditions may be specified
- detailed reports can be quickly generated
- wildcard and "match-one" string specifications included

HDBS and MDBS Packages Include:
- DDL data definition language analyzer/editor
- 260-page users manual
- DMS data management routines callable from host language
- Sample application program and DDL files
- Relocator to re-org all routines
- System specific manual for bringing up our software



54-page "primer" on data base systems for micro-computers — only $10.00 per copy.

Dealer Demo-Package ($60.00) includes Primer, HDBS/MDBS Manuals, Demo-Disk, etc.

NEW!

Both HDBS and MDBS Systems...
- Run under...
  CP/M® with CBASIC; Microsoft BASICs, FORTRAN or COBOL; InterSystem PASCAL/Z; Sorcim PASCAL/M; Micro Focus CIS COBOL; Digital Research PL/I
  OASIS
  TRSDOS and NEWDOS (Models I and II) with Disk BASIC
  North Star DOS with North Star BASIC
  Apple DOS and Applesoft BASIC
  Machine Language Interface available on all above systems.
- Up to 254 record-types definable in the data base; each record-type may contain up to 255 item-types; each item-type may be up to 9,999 bytes in length.
- Names of data items, records, sets, and files are wholly user definable.
- Commands to add, delete, update, search, and traverse the data base.
- Straightforward use of ISAM-like structures.
- Records can be maintained in several sorted orders.
- Written in machine language for maximum execution efficiency and minimal memory usage.
- Independent of types and sizes of disk drives. Support data base spread over several disk drives (max.8); disks may be mini- or full-sized floppies or hard disks.
- Available versions: Z80 (requires approx. 18K), 6502 (approx. 30K), 8080 (approx. 22K)
  Total memory requirement must allow for buffer areas. For Apple users, a language card is recommended.
- 8086 version available. (Call or write for details and prices.)

Ordering information (applicable to Z80, 8080 and 6502 versions):

HDBS (Version 1.04)	$ 300.00
MDBS (Version 1.04)	900.00
DRS	300.00
RTL	300.00
QRS	300.00
HDBS upgrade to MDBS	650.00
MDBS with DRS, RTL, and QRS	1500.00
HDBS/MDBS Manual	35.00
DRS Manual	5.00
RTL Manual	5.00
QRS Manual	5.00
System Specific Manuals (each)	5.00

Within a given operating system, add $125.00 for each additional language selected.

For prices outside the U.S. and Canada, please ask for price lists.

When ordering, specify intended use with...
1. North Star DOS and BASIC
2. CP/M® - CBASIC
3. CP/M® - Microsoft BASIC 4.XX
4. CP/M® - Microsoft BASIC 5.XX
5. CP/M® - Microsoft BASIC or FORTRAN Compiler
6. CP/M® - Microsoft COBOL-80
7. CP/M® - InterSystem PASCAL/Z
8. CP/M® - Sorcim PASCAL/M
9. CP/M® - Digital Research PL/I
10. CP/M® - Micro Focus CIS COBOL
11. TRSDOS/NEWDOS and TRS Disk BASIC (Models I and II)
12. Apple DOS and Applesoft BASIC
13. OASIS
14. Machine Language Programs (Specify operating system.)

Add $2.50 handling fee for non-cash order ($5.00 outside U.S.).

Indiana residents add 4%.

We accept Visa and Master Charge.

Setting standards of excellence for data base software...worldwide.

Micro Data Base Systems, inc.

Box 248, Lafayette, Indiana 47902
317-448-1616

included could be the hyperbolic and inverse trigonometric functions. The square root of a complex number was included even though it is a special case of z^p. The only complicated ones are the power and the logarithm. This is due to the angle utilized.

The subroutines have been given large line numbers so that they may be put at the end of a program. Users can certainly renumber these lines or use only those needed for a particular problem.

Two rather simple problems (see listings 2 and 3) are included to demonstrate the use of the functions. Both make use of Newton's method to solve for the roots of a function. This is done using the following iterative formula to obtain a better approximation of z, z_{k+1}, from the current approximation, z_k:

$$z_{k+1}=z_k-f(z_k)/f'(z_k) \text{ where } k=1,2,\ldots$$

An initial or starting value of z is selected ($z=x+iy$). Thus $z_1 = x_1 + iy_1$ is used in $f(z_1)$ and $f'(z_1)$. This will generate a z_2 which is fed back into the right-hand side of the equation to give a z_3, and so on.

The method is rapid in convergence and quite stable. If a certain z_k should make $f'(z_k)$ very small or zero, however, it is best to restart with a new z_1. In the programs shown, a test to stop cycling is made on the $f(z)$:

```
IF SQR(F1↑2+F2↑2) <1E−6 THEN . . .
```

This statement stops the iteration when the complex error has a magnitude of less than 10^{-6}.■

Listing 2: *Example program using the subroutines of listing 1. The program given in listing 2a attempts to find a root of the function $f(z)=e^z - z^2$. Note that its derivative $f'(z)=g(z)=e^z-2z$. Listing 2b shows two separate runs of the program with starting points of (1,1) and (−1,0); the final results are underlined. Due to the cyclic nature of e^z, there are an infinite number of solutions to this problem.*

(2a)

```
10 INPUT "                              KEY IN X,Y ",X,Y
12 PRINT
15 PRINT TAB(14);X,Y
20 A1=X:B1=Y
30 GOSUB 5000
40 P=2
50 GOSUB 3000
60 F1=E1-P1:F2=E2-P2
65 IF SQR(F1↑2+F2↑2)<1E-6 THEN 120
70 G1=E1-2*A1:G2=E2-2*B1
80A1=F1:B1=F2:A2=G1:B2=G2
90 GOSUB 2000
100 X=X-Q1:Y=Y-Q2
110 GOTO 15
120 STOP "              ROOT DETERMINED. KEY RUN FOR A NEW SET"
```

(2b)

```
X1 =  1                 Y1 = 1
      2.912389622375      2.575157181739
      2.187132232955      2.174648753578
      1.760811047732      1.808824533853
      1.603663701734      1.596954184978
      1.58722527008       1.54253028231
      1.588042823737      1.540223443863
      1.588047264669      1.540223501065

X1 = -1                 Y1 = 0
     -.733043605249       0
     -.7038077863239      0
     -.7034674683272      0
```

Listing 3: *Example program using the subroutines of listing 1. The program given in listing 3a attempts to find a root of the function $f(z)=2z^2+(-6-i)z+(20-i)=(2z+4-i)(z-5)$. (Its roots are $(-2+0.5i)$ and 5.) The derivative $f'(z)=g(z)=4z+(-6-i)$. Two runs of the program are shown in listing 3b, with the final results underlined.*

(3a)

```
10 INPUT "                              KEY IN X,Y ",X,Y
12 PRINT
15 PRINT TAB(14);X,Y
20 A1=X:B1=Y
40 P=2
50 GOSUB 3000
60 F1=2*P1:F2=2*P2
70 A2=-6:B2=-1
80 GOSUB 1000
90 F1=F1+M1-20:F2=F2+M2+5
95 IF SQR(F1↑2+F2↑2)<1E-6 THEN 200
100 G1=4*A1-6:G2=4*B1-1
110 A1=F1:B1=F2:A2=G1:B2=G2
120 GOSUB 2000
130 X=X-Q1:Y=Y-Q2
140 GOTO 15
200 STOP          "ROOT DETERMINED. KEY RUN FOR A NEW SET"
```

(3b)

```
X1 =  1                 Y1 = 1
     -3.307692307727     -4.461538461515
     -1.45941644561      -1.379310344755
     -1.434942737807      .532192367931
     -2.053130882705      .4886935917174
     -2.00036624035       .4998063289297
     -2.00000001228       .4999999788526

X1 =  2                 Y1 = 2
      2.207547169882     -2.226415094319
      2.830440251643      1.193459119487
      4.902563504007     -1.877088064073
      4.604564248345     -.193451138577
      5.015324400454      2.68292464E-02
      4.999923902019      1.12126002E-04
      4.999999999177     -2.49665620E-09
```


6809 S-100 ads™

SINGLE BOARD COMPUTER

- **MEETS I.E.E.E. S-100 STANDARD**
  - MC 6809 • 10 addressing modes
  - • 24 indexed sub modes
  - • auto increment/decrement
  - • constant indexing from PC
- **4K/8K/16K ROM • 2K RAM**
  ROM/RAM relocatable on 4K boundary
- **ACIA; PIA; 8080 SIMULATED I/O**
- **20 PARALLEL I/O LINES • 256 I/O PORTS**
  ACIA provides RS-232 lines for asychronous communications with limited modem control at 8 selectable baud rates; I/O locatable at any 4K boundary
  P.C. Board & Manual $69.95
  with Monitor $99.95
- **ASSEMBLED & TESTED WITH 2K RAM & MONITOR $349.50**
- **adsMON: ADS MONITOR**
  Examine and change registers and memory; punch and load in Motorola format; user definable interrupt service and more
  $39.95 in 2716 EPROM

MasterCharge/VISA Accepted
Illinois residents add sales tax Add 2.5% for shipping

Ackerman Digital Systems, Inc.
110 N. York Rd., Suite 208, Elmhurst, Ill. 60126 (312) 530-8992

Circle 72 on inquiry card.

BYTE's Bits

International Systems and Courseware Exchange

One of the greatest deterrents facing organizations that desire to purchase a microcomputer is the fact that the development of systems applications software is costly and time-consuming. In an attempt to find a solution to this situation, John Earle Associates Inc has met with educators, professionals, and business people to discuss means for alleviating this problem. These discussions culminated in the establishment of the International Systems and Courseware Exchange (ISCE). The purposes of the ISCE are to enable schools, businesses, and professionals to license others to use their proprietary courseware and systems for an annual fee on a lease basis, and to recover the developmental costs of the software through the licensing fee. All schools, governmental agencies, doctors, lawyers, engineers, accountants, businesses, manufacturers, and freelance developers of systems applications, courseware, or games are welcome to participate, as providers or as users; or as is the case within many businesses and schools, they may be included in both categories.

A free catalog will be provided to each individual or organization with listings in the catalog. Catalogs will be available to others for $10.

The first catalog containing listings of software and all information necessary to order or submit programs will be published in January, 1981. Catalog entries dealing with administrative or business applications should be mailed to Howard R Baldwin, Registrar, University of Akron, 3220 Miles NW, Canton OH 44718. Catalog entries concerning educational or professional applications should be sent to Swen A Larsen, Dean of Science and Technology, World University, Barbosa esq Guayama, Hato Rey, Puerto Rico 00917. For a copy of the catalog or for more information, contact John Earle Associates Inc, POB 12213, Loiza Station, Santurce, Puerto Rico 00914.

Pass the Salt and the Computer, Please

Eleven of the nation's newspapers affiliated with the AP (Associated Press) are experimenting with electronic delivery of news to the home. Through the joint efforts of the newspapers, the AP, and CompuServe Inc, an information networking firm, a daily electronic edition will be published for at least six months. The results of this test will be shared with the 1300 daily newspapers and 3500 radio and television stations that are a part of the AP news cooperative.

The newspapers participating are *The Columbus Dispatch*; *The Washington Post*; *Los Angeles Times*; *The New York Times*; *Chicago Sun-Times*; *The St Louis Post-Dispatch*; *The Minneapolis Star* and *Tribune*; *The Atlanta Journal* and *Constitution*; *The Norfolk Virginian-Pilot* and *Ledger-Star*; *San Francisco Chronicle*; and *The Middlesex News* (Framingham, Massachusetts). Each newspaper contributes news items and computing expertise to produce the news that is delivered to the CompuServe computers. Customers with a terminal and modem merely have to place a telephone call to link up with the electronic editions. Home users are charged $5 per hour, billed in 1-minute increments. The service operates from 6 PM to 5 AM weekdays and all day on weekends and holidays.


The experimenters hope that the test will provide substantial information on marketing the service, promotion, design of the data base, and new sources of advertising revenue. For more information, contact CompuServe Inc, 5000 Arlington Centre Blvd, Columbus OH 43220, (614) 457-8600.

Tuition-Free Program for Women in Electrical Engineering

A brochure from the University of Dayton outlines a National Science Foundation-sponsored Fast-Track program for women interested in electrical engineering. To qualify, an applicant must hold a bachelor's degree in mathematics, physics, or a related science. Participants earn a certificate that serves to advance them to an academic level equivalent to that of an electrical engineering graduate. Credits earned can be applied toward a bachelor's degree in electrical engineering. A Fast-Track staff at the university offers counseling and guidance, assists in part-time work placement, arranges for partial living expense stipends and placement in engineering jobs at program conclusion. The program commences January 5, 1981, and lasts thru December 19, 1981. Copies of the brochure, entitled *Women Interested in Engineering*, can be obtained by writing or calling Carol M Shaw, Assistant Dean, School of Engineering, University of Dayton, Dayton OH 45469, (513) 229-2736. ■



TOGETHER...A New Begi

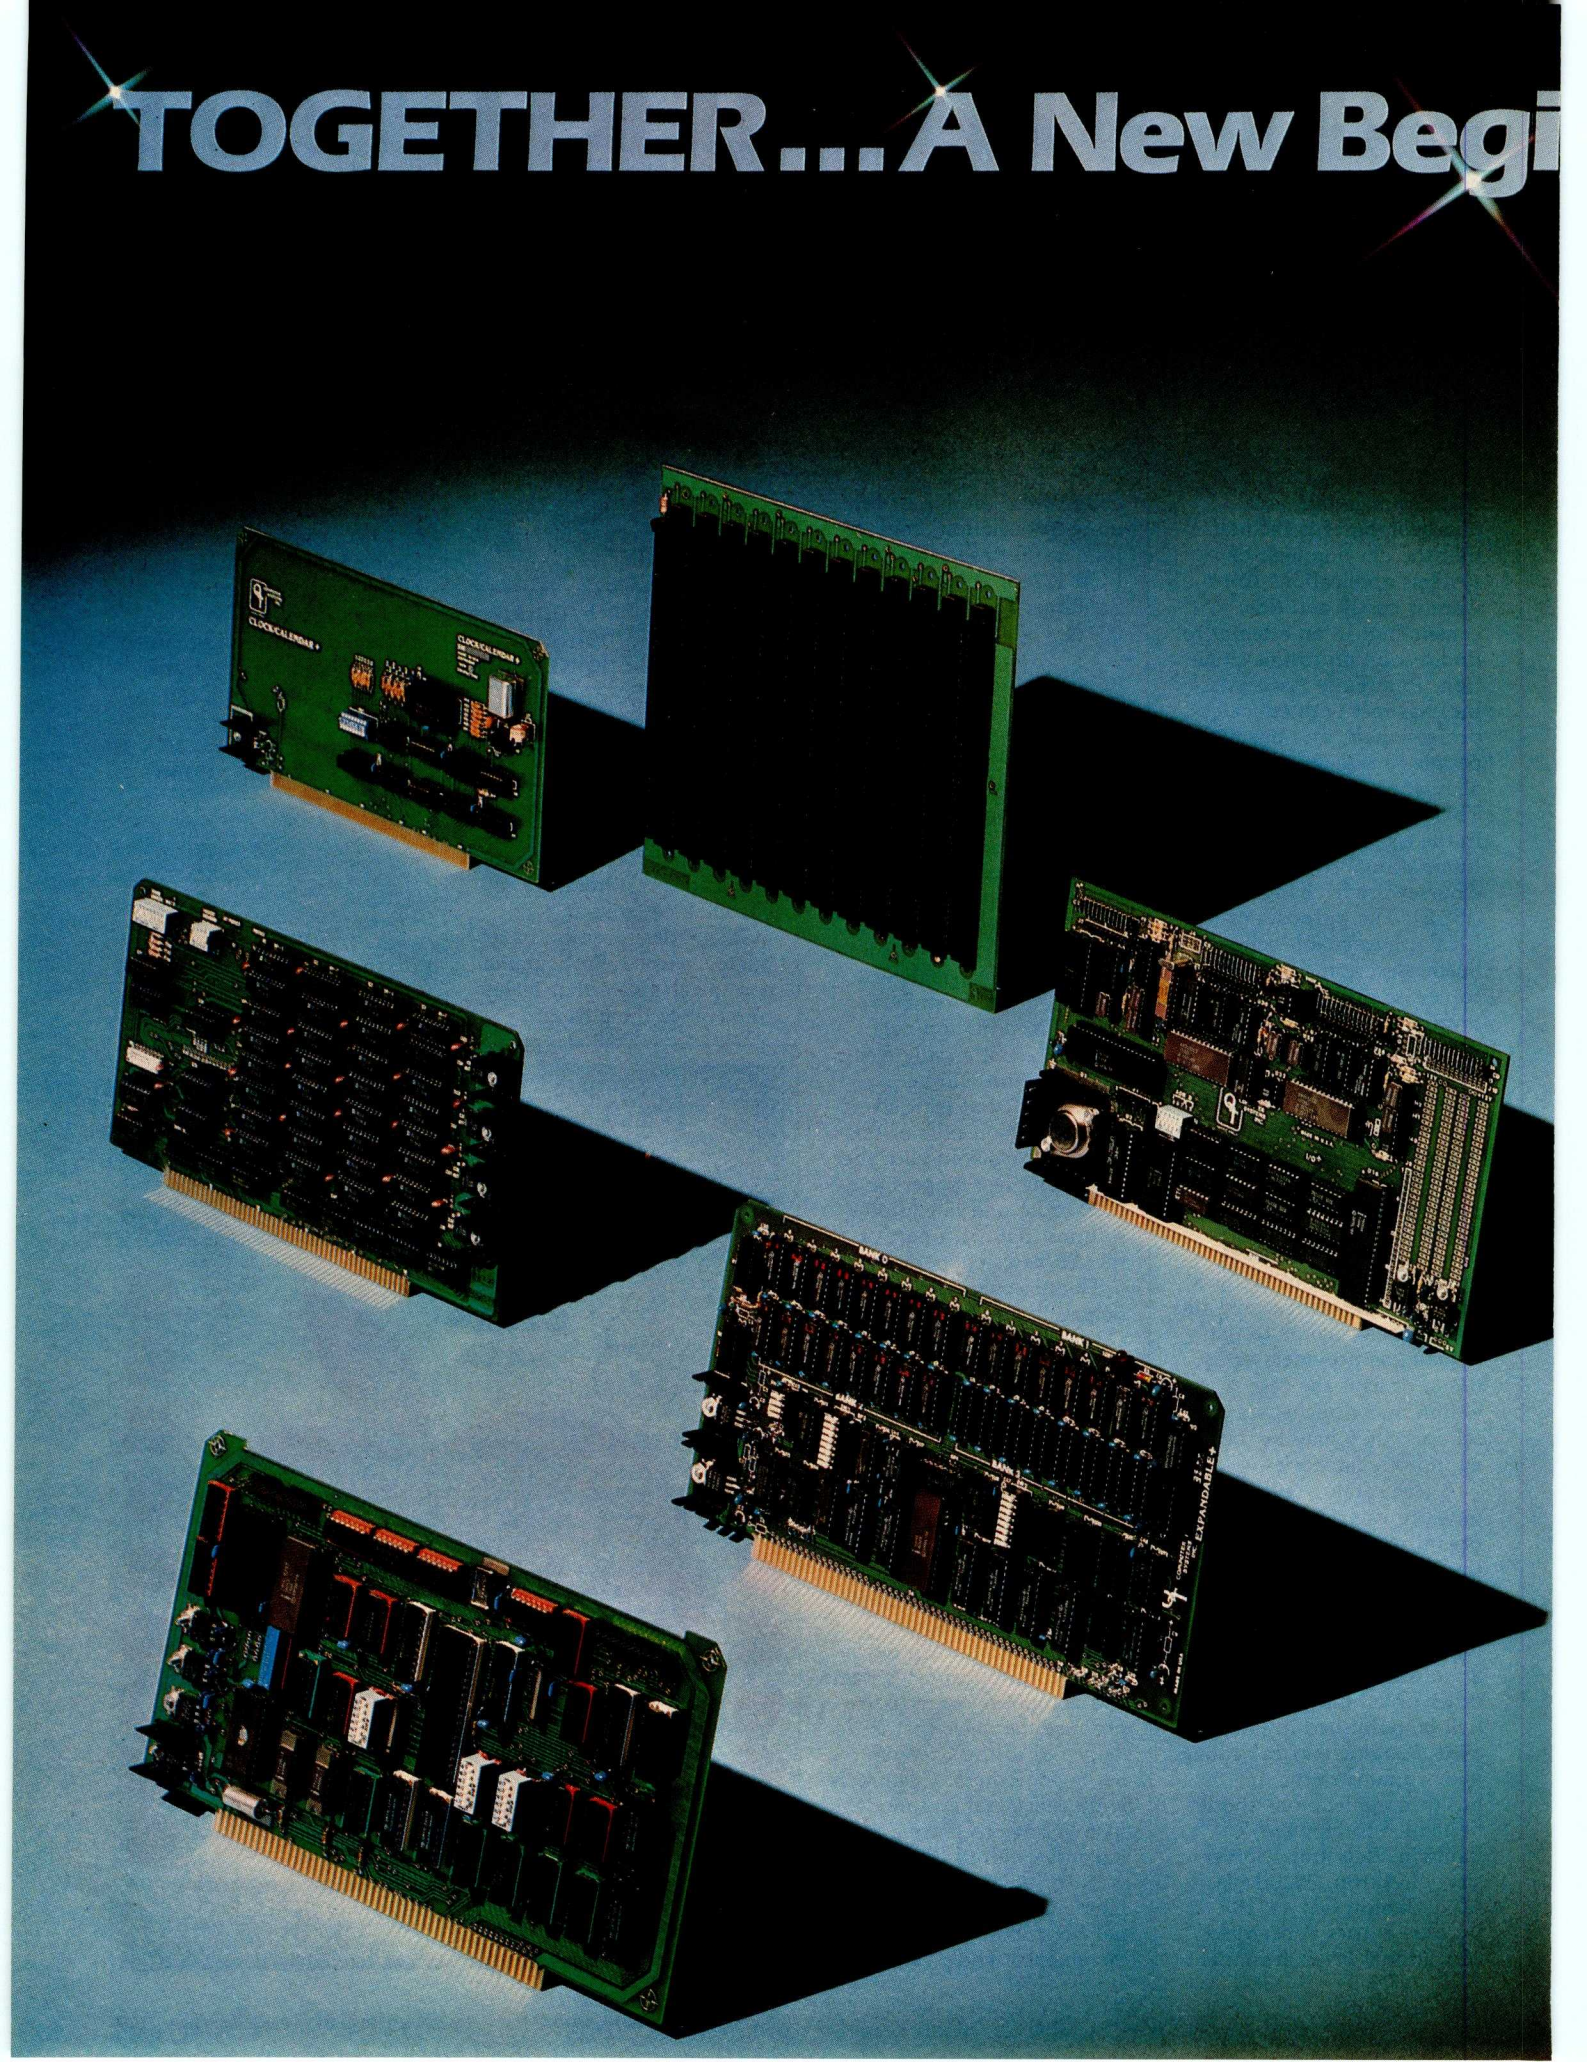


nning!


Manufacturing and marketing micro products is our only business.

QT is committed to building uncommon features and quality into each of its micro user products. We're offering you the lowest prices on the QT System + and other fine products. It's our new beginning.

■ **Look At These QT System + Features:**
2 Megabyte storage (standard) • Up to 16 Megabytes storage available • Mainframe with power supply and fan • Televideo 920C terminal • CPU-Z80-4MHZ • Two 8" disk drives • Floppy disk controller (double density) • Dynamic Memory (48K—expandable to 64K) • 2K Monitor program and Disk Bios on 2716 EPROM • RAM/ROM/PROM, up to 8K in any combination on CPU • Hard Disk Compatible • 2 Serial/2 Parallel Ports • Real Time Clock • EPROM Programmer • CP/M® 2.2 or 1.4 Operating System • MP/M® Compatible • Full line of business software available.

SYSTEM + SS (1 Megabyte) Sgl Side/Dbl Den $4295.00.
SYSTEM + DS (2 Megabytes) Dbl Side/Dbl Den $4995.00

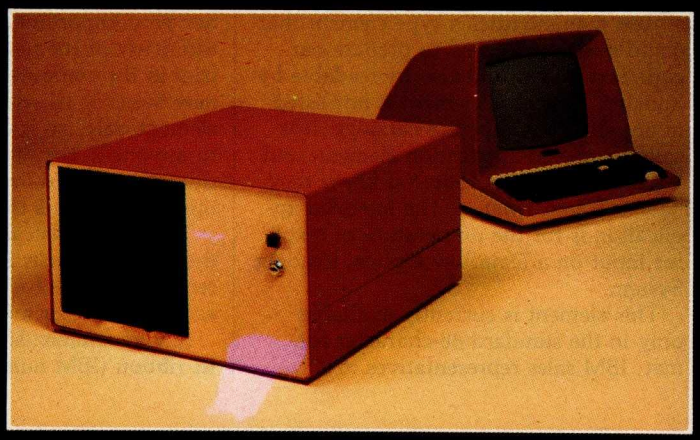

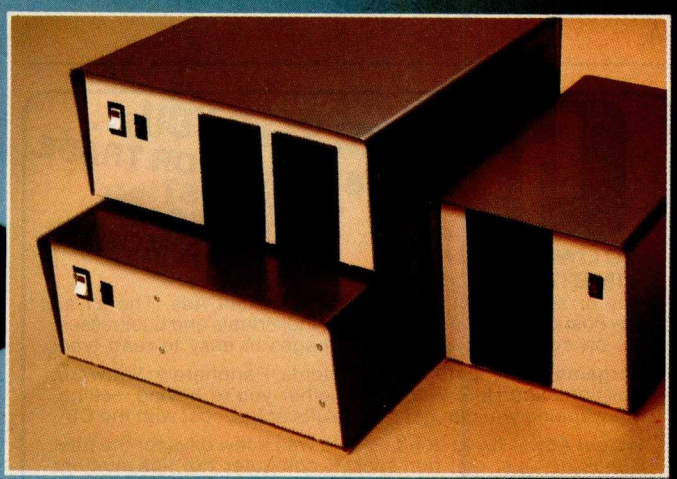

■ **Silence + Mother Boards**
No need for termination • Very high crosstalk rejection • 6, 8, 12 and 18 slots available • Has operated to 14 MHZ quietly.

Bare Bd.	6-Slot $24.95	8-Slot $26.95	12-Slot $29.95	18-Slot $49.95
Kit	$39.95	$54.95	$69.95	$99.95
A&T	$49.95	$69.95	$89.95	$139.95

■ **SBC + 2/4**
1K RAM On Board • 2 Programmable Timers • Power On Jump to On-Board 1K or 2K EPROM (2708-2716) • 2 Separate Parallel Ports • Programmable Baud Rate Selection (110 to 9600) • Serial I/O Port (RS-232).

Bare Board $60.00 Kit $190.00
1K Mem. Kit $12.00 A&T $280.00

■ **Expandable + Dynamic Memory (16K to 64K)**
Uses 3242 Refresh Chip with delay line • Quiet four layer PC Bd • Supports 16K, 32K, 48K or 64K of memory • 24 Address lines per IEEE specifications • Bank on/off signal selected by I/O port 40 (Hex) per industry standard.

Bare Board $70.00 48K Kit $480.00
16K Kit $280.00 48K A&T $550.00
16K A&T $325.00 64K Kit $525.00
32K Kit $360.00 64K A&T $625.00
32K A&T $425.00

■ **I/O +**
Two Independent SYNC/ASYNC Serial Ports • One Strobed 8-Bit Parallel Input Port With Handshaking • Three 8-Bit Parallel Ports (Undedicated, User Configured) • Three Independent 16-Bit Timers • 8 Level Priority Interrupt Controller.

Bare Board $69.00 A&T $375.00
Kit $275.00

■ **RAM + 65**
2 or 4MHZ • 16K Static RAM • Uses 2114L static RAMS • Addressable in 4K steps • Memory protection in 1K increments • Features bank selection.

	2MHZ		4MHZ
Bare Board	$20.00	Kit	$225.00
Kit	$200.00	A&T	$250.00
A&T	$240.00		

■ **Clock/Calendar +**
Day, Week, Month, Year • 24 Hour Time, or 12 Hour AM PM (selectable) • Interval Interrupt Timer 1024 Hz (approximately 1 millisec), 1 Sec, 1 Min, 1 Hour • On Board Battery Backup • Available for Apple & TRS-80

Bare Board $45.00 A&T $150.00
Kit $100.00

■ **Mainframe + MF +**
• Cabinet • 30A Pwr Supply • 12 or 18 Slot Motherboard • Fan-cooled • AC Line Filter to eliminate EMI • A&T • Power and Reset Switches on front panel.

MF + 12 $450.00
MF + 18 $500.00
MF + W/O Motherbrd $400.00

■ **Mainframe + MF + MD**
Accepts 2 Each 5¼" Disk Drives • 18A Pwr Supply • 6-12 Slot Motherboard • Dual mini disk provision • Disk Drive Power Supply • AC line filter to eliminate EMI • Power and reset switches on front panel.

MF + MD12 $500.00
MF + MD6 $450.00
MF + MD W/O Motherbrd $400.00

■ **DDC-8 +**
Available in Brown or TRS 80 Colors • Disk Cabinet for Single 8" Drive • Data Cable • Fan • Accepts Persci, Shugart, Siemens, Remex, QUME

DDC-8 + $250.00

Also Available: S-100 (Smart) Proto Board + Ask for our catalog

WARRANTY: 1 year against defects in material and workmanship from date of shipment on all QT products

Apple® is a trademark of Apple Computer Inc. CP/M™ and MP/M™ are trademarks of Digital Research. TRS 80® is a trademark of Radio Shack.

QT COMPUTER SYSTEMS INC.

15620 South Inglewood Avenue
Lawndale, CA 90260
(213) 970-0952
Call TOLL FREE: 800-421-5150
(Except Alaska, California and Hawaii)

Master Charge · VISA · Cards Welcome

Circle 74 on inquiry card.

Letters continued from page 20:

Impressive Bar-Code Maker

IBM manufactures a type element that could possibly be used to prepare bar-code text that would also be readable by humans. This type element is *not* listed in any of IBM's typeface catalogs. It is called a special-application element, and I guess IBM figures that you know they have it if you want it. The intended application is for the preparation of text for input on a Dataflow Optical Reading System.


This element is currently available only in the standard 88-character format. IBM sales representatives in Michigan could not find out if it was going to be manufactured in the new 96-character format too. This point is not very important, since there are not too many of the new 96-character Selectrics in the computer-users' market. The new Selectric III will use the 96-character element only, so it won't be of much use to anyone in the market to upgrade, since they would lose their investment in the type elements they had.

The element is called *DF-2 OCR* and the part number is 1167659. IBM's current price is $18 for one element, or $16 each for three or more.

IBM recommends that you use a Tech III ribbon (IBM number 1136391) with the DF-2 OCR element; the High-Yield Correctable Film carbon ribbon just doesn't make an adequate impression all the time. The DF-2 OCR is a 10-pitch element, by the way, so don't order it unless you have 10-pitch capacity. I would be interested in hearing from any readers who interface the HEDS-3000 to their computer and use this element to generate the input data.

Michael Essig
POB 828
Jackson MI 49204

Figure 1: *An example of the IBM DF-2 OCR output, using the High-Yield Correctable Film Ribbon.*

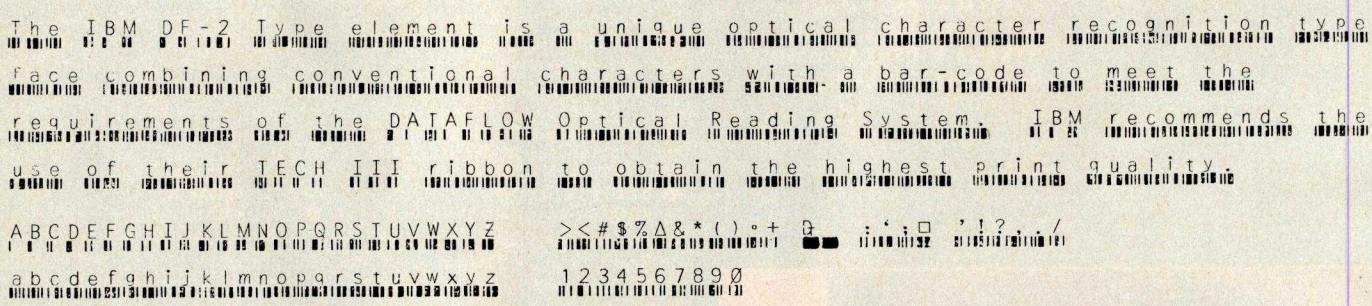

STOP!



Did you remember to remove your Priority One insert? If not please turn back to page 80 and tear it out.

CIA COMPUTER INSTANT ADS

CAN HELP YOU... BUY, SELL OR TRADE.
- **LOW COST**
- **HOT LINE**
- **TWICE A MONTH**

Buy or sell **fast** with the Computer Instant Ads. The all ad **low cost** computer publication for individuals and businesses. It's on convenient 8½" by 11" pages in easy to read type.

Bargains — Computers, Components, Peripherals, Software, Positions and Help Wanted, whether you're buying, selling, or swapping you can get fast results at low cost with the CIA.

Instant Ads — If you don't want to wait a few days for the next CIA issue—just dial our special computer hot line number (reserved for subscribers) anytime, 24 hours a day, and our computer will tell your computer (with 300 baud modem) all about the ads received by the CIA since our last issue. Call as often as you like. The only additional expense to you is the price of a direct dial phone call. But remember, if you don't want to pay for the phone call, you only have a few days to wait because the CIA is published **TWICE** each month.

LOW COST ADVERTISING — Only 10¢ per word for one ad and just 8¢ per word per issue when the same ad is run in two or more consecutive issues.

FREE ADVERTISING — Subscribe now for free advertising. Mail an ad (up to 50 words type written or printed, please) to us with your subscription and we will run it free; or phone your subscription using our toll-free number and charge your subscription to your VISA or Master Charge Card. When you telephone your subscription, we will send you a certificate for a free ad.

LOW SUBSCRIPTION RATES **One year (24 issues) only $13.00**
Two years (48 issues) only $20.00

Subscribe NOW *Call TOLL-FREE* 1-800-453-6464
In Utah phone 268-3000

COMPUTER INSTANT ADS ASSOCIATION
277 East 6100 South • Salt Lake City, Utah 84107

Circle 75 on inquiry card.

PROBLEM.

INT(X^N+X*SIN(X^2),X)

SOLUTION.


Surprised? You should be. Because until now, no software could solve anything but the most basic arithmetic problems without a series of complicated steps.

A big disadvantage? If you use a microcomputer for scientific, educational or engineering applications, you bet it is. That's why Microsoft has come up with a solution of its own. muMath.

muMath is a symbolic math package you'll recognize immediately as a major advance in microcomputer software.

muMath lets you efficiently and accurately perform the most complex mathematical operations: Exact, infinite precision rational arithmetic. Unbound variables. Complex expressions (even equations may be included). Exact solution of algebraic equations. Plus logarithmic, exponential and trigonometric simplifications and transformations.

That's right. It does in an instant what took you years to learn at school. Rational arithmetic. Algebra. Trigonometry. Transcendental functions. Symbolic differentiation (including ordinary and partial derivatives.) Symbolic integration of indefinite and definite integrals. Matrix arithmetic and algebra.

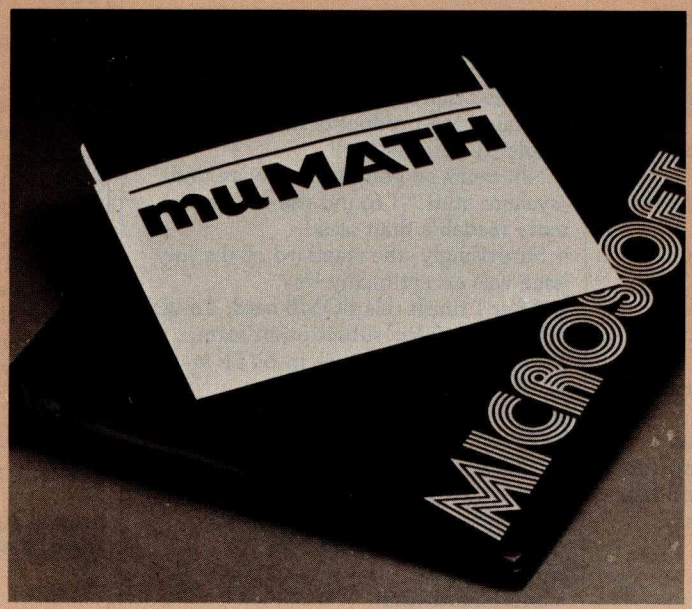

Trigonometric simplification? But of course. Just type:

```
?SIN(2*Y)*(4*COS(X)^3
-COS(3*X)+SIN(Y)*COS
(X+Y+#P1)-COS(X-Y));
```

Then instantly muMath returns:

```
@4*SIN(Y)*COS(X)*COS(Y).
```

Adding fractions? Need you ask?

```
?1/3+5/6+2/5+3/7;
@419/210.
```

muMath is written in muSIMP, which is included in the muMath package.

muSIMP is an applicative, recursive language, ideal for describing complex mathematical concepts.

Because of its highly interactive nature and hierarchical structure, muMATH is an excellent math teaching device, from simple arithmetic to calculus.

muMATH is currently available for the CP/M® operating system.

The complete system, including muMATH and muSIMP on disk and documentation is $250. Runs under CP/M.

Just what you need? We thought so. Shoot some questions at us about muMATH. We have all the answers.

Also new from Microsoft: the muLISP interpreter for CP/M. An efficient and reliable LISP system fully capable of supporting serious artificial intelligence efforts. $200.

CP/M is a registered trademark of Digital Research.

MICROSOFT

10800 NE Eighth
Suite 819
Bellevue, WA 98004
206-455-8080
Telex 328945

We set the standard.

Circle 76 on inquiry card.

BYTE's BOMB Cards

*From the first year of BYTE to the present we have put great stock in your monthly comments that accompany BOMB (BYTE's Ongoing Monitor Box) cards. We really do read every one of them, and we are often influenced by your comments. What follows is a representative sampling from the cards over the past few issues. By the way, if you'd like to add your votes on this month's articles to our tally, simply fill out the BOMB card at the back of the magazine, using the article table on the second-to-last page as a guide....***CM**

Pournelle:
- *The User's Column* is a very good idea—keep on!
- Pournelle is great!
- More Pournelle please. I'm subscribing.
- Very interesting theme. No more Pournelle, please.
- [Pournelle wrote the] best article on TRS-80 since BYTE began.
- Are Pournelle's articles only to be semiregular? I vote for more.
- Pournelle alone will get me to subscribe.
- Pournelle has no finesse.
- Pournelle helped me decide between Radio Shack, Apple, and Atari... TRS-80 and Omikron here I come.
- Jerry Pournelle's column told me far more about TRS-80 add-ons than I have managed to learn in many weeks of searching.

Ciarcia:
- Mr Ciarcia has done it again.
- Don't lose Steve, he's worth his weight in gold!
- You should put two or three more Steve Ciarcias on the payroll.
- Ciarcia's article was excellent, but only Bo Derek gets a 10.

CAI:
- [I was] glad to have some really good info on CAI!
- There were too many articles on CAI.
- CAI makes as much sense as substituting computer-game playing for physical education. Education is achieved through dint of personal dedication and mental application of effort. Chrome-plated push-button gee-gaws cannot substitute for same.

Others:
- Excellent editorial.
- The editorial by Dr Braun rated a ten.
- Editorials should be rated.
- Your product description of the Apple III was terrific—and they say regular magazines can't get new products published quickly.
- I found the product description of the Apple III outstanding.
- Not being so good at hardware and "systems stuff," I found the July issue more readable than usual.
- Surprisingly, the standard of the July issue was exceptionally low.
- After I finish this BOMB card, I'm going to fill out the subscription form.
- The quality of articles in BYTE is slowly going downhill.
- [July was the] best overall issue of BYTE in a while!
- [July was] a rather dull issue—let's keep it on a professional level.
- Indeed you *are* starting to speak English instead of "highbrow."

How About...
- More hardware!
- More language-oriented articles!
- More homebrew articles!
- More on 16-bit processors!
- Emphasis on personal applications?
- Less educational material—more technical articles?
- Publishing "Favorite Benchmarks" as they come in.
- Publishing information about the Signetics 2650 microprocessor?

Coming up:
- I would like to see articles on homebrew graphics terminals.
- I would appreciate more articles on the new 16- and 32-bit microprocessors.
- I would very much like to see in-depth articles on speech recognition.
- When will you publish more articles on artificial intelligence?
- It would be nice if more articles could appear on fantasy games....

CP/M Vendors?

As the developers of CP/M and MP/M, we at Digital Research are preparing a list of vendors of CP/M-compatible software. We would appreciate the help of BYTE readers in compiling this list for distribution to all interested persons who contact us.

If you are currently marketing CP/M-compatible software, please send us any or all literature pertaining to your software. If you have any questions, please contact Curt Geske, at Digital Research, POB 579, Pacific Grove CA 93950, or (408) 649-3896.

Thank you.

Marilyn Darling
Digital Research ■

S-100 USERS: GIVE YOUR COMPUTER THE GIFT OF SIGHT!

The DS-80 Digisector® is a random access video digitizer. It works in conjunction with a TV camera (either interlaced or non-interlaced video) and any S-100 computer conforming to the IEEE standards. Use it for:

- Precision Security Systems
- Moving Target Indicators
- Computer Portraiture
- Fast To Slow Scan Conversion
- Robotics
- Reading UPC Codes, schematics, paper tape, musical scores



● IMAGE PROCESSED BY DS-80 ●

CHECK THESE FEATURES:

☐ **High resolution** — a 256 × 256 picture element scan

☐ **Precision** — 64 levels of grey scale

☐ **Speed** — Conversion time of 14 microseconds per pixel

☐ **Versatility** — scanning sequences user programmable

☐ **Economy** — a professional tool priced for the hobbyist; comes fully assembled, tested and burned in, with fully commented portrait printing software.

Price: $349.95 MasterCharge and Visa


THE MICRO WORKS

P.O. BOX 1110, DEL MAR, CA 92014 714-942-2400

Circle 77 on inquiry card.

A Few Extraordinary Products for Your 6800/6809 Computer

SS-50 Bus LFD-400™ and LFD-800™ Systems

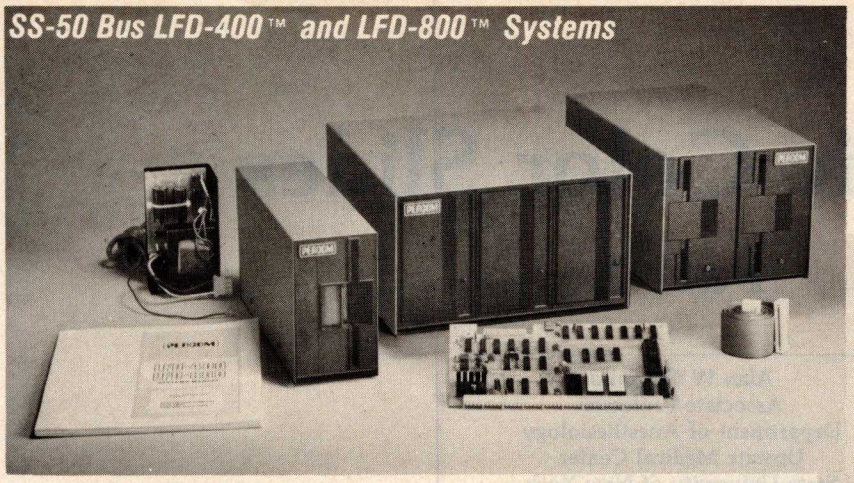


From Percom . . .


Low Cost Mini-Disk Storage in the Size You Want

Percom mini-disk systems start as low as $599.95, ready to plug in and run. You can't get better quality or a broader selection of disk software from any other microcomputer disk system manufacturer — at any price!

Features: 1-, 2- and 3-drive systems in 40- and 77-track versions store 102K- to 591K-bytes of random access data on-line • controllers include explicit clock/data separation circuit, motor inactivity time-out circuit, buffered control lines and other mature design concepts • ROM DOS included with SS-50 bus version — optional DOSs for EXORciser* bus • extra PROM sockets on-board • EXORciser* bus version has 1K-byte RAM • supported by extended disk operating systems; assemblers and other program development/debugging aids; BASIC, FORTRAN, Pascal and SPL/M languages; and, business application programs.

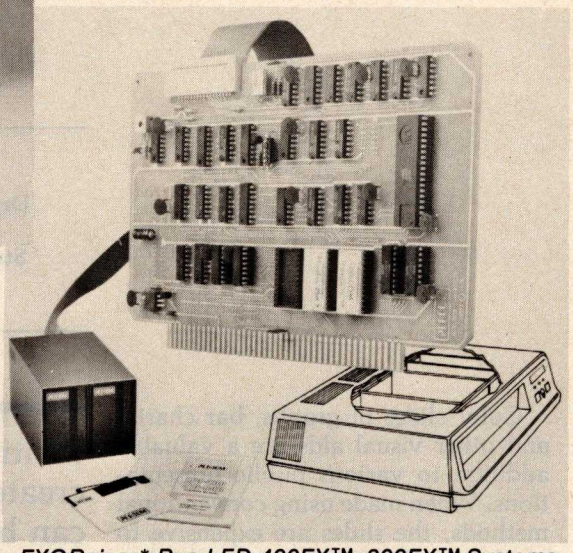

EXORciser Bus LFD-400EX™ -800EX™ Systems*

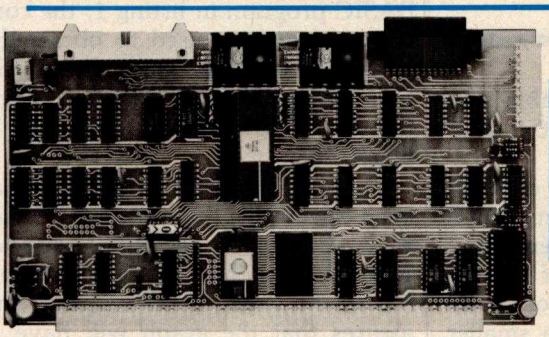

Versatile Mother Board, Full-Feature Prototyping Boards

Printed wiring is easily soldered tin-lead plating. Substrates are glass-epoxy. Prototyping cards provide for power regulators and distributed capacitor bypassing, accommodate 14-, 16-, 24- and 40-pin DIP sockets. Prototyping boards include bus connectors, other connectors and sockets are optional.

MOTHERBOARD — accommodates five SS-50 bus cards, and may itself be plugged into an SS-50 bus. Features wide-trace conductors. Price: $21.95

SS-50 BUS CARD — accommodates 34- and 50-pin ribbon connectors on top edge, 10-pin Molex connector on side edge. Price: $24.95.

SS-30 BUS CARD — 1¼-inch higher than SWTP I/O card, accommodates 34-pin ribbon connector and 12-pin Molex connector on top edge. Price: $14.95.

The SBC/9™. A "10" By Any Measure.

The Percom SBC/9™ is an SS-50 bus compatible, stand-alone Single-Board Computer. Configured for the 6809 microprocessor, the SBC/9™ also accommodates a 6802 without any modification. You can have state-of-the-art capability of the '09. Or put to work the enormous selection of 6800-coded programs that run on the '02.


The SBC/9™ includes PSYMON™, an easily extended 1-Kbyte ROM OS. Other features include:

- Total compatibility with the SS-50 bus. Requires no changes to the motherboard, memory or I/O.
- Serial port includes bit-rate generator. RS-232-C compatible with optional subminiature 'D' connector installed. 10-pin Molex connector provided.
- Eight-bit, non-latched, bidirectional parallel port is multi-address extension of system bus. Spans a 30-address field; accommodates an exceptional variety of peripheral devices. Connector is optional.
- Includes 1-Kbyte of static RAM.
- Costs only $199.95 with PSYMON™ and comprehensive users manual that includes source listing of PSYMON™.

The Electric Window™: Instant, Real-Time Video Display Control

Memory residency and outstanding software control of display format and characters make this SS-50 bus VDC card an exceptional value at only $249.95. Other features:

- Generates 128 characters including all ASCII displayable characters plus selected Greek letters and other special symbols.
- Well-formed, easy-to-read 7x12-dot characters. True baseline descenders.
- Character-store (display) memory included on card.
- Provision for optional character generator EPROM for user defined symbols.
- Comprehensive users manual includes source listing of Driver software. Driver — called WINDEX™ — is also available on mini-diskette through the Percom Users Group.

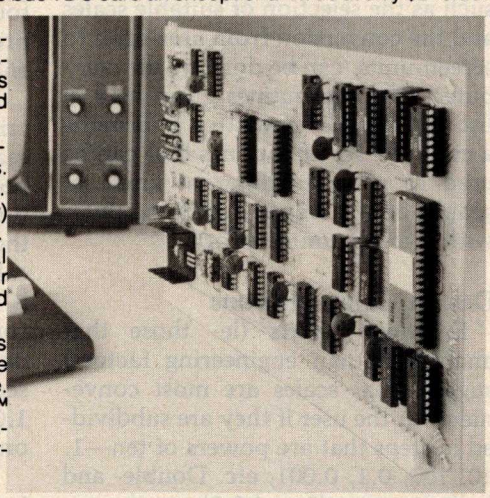

™ trademark of Percom Data Company, Inc.
* trademark of the Motorola Corporation.
Prices and specifications subject to change without notice.

PERCOM

PERCOM DATA COMPANY, INC.
211 N. KIRBY GARLAND, TEXAS 75042
(214) 272-3421

Products are available at Percom dealers nationwide. Call toll-free, 1-800-527-1592, for the address of your nearest dealer, or to order direct.

Circle 79 on inquiry card.

Circle 78 on inquiry card.

Graphic Color Slides

Part 1

Alan W Grogono
Associate Professor
Department of Anesthesiology
Upstate Medical Center
State University of New York
750 E Adams St
Syracuse NY 13210

Color slides of graphs, bar charts, and other visual aids are a valuable addition to various public presentations. When made using conventional methods, the slides are expensive to produce and difficult to modify. But when the slide is produced by photographing a computer-generated color image (as described in my article, "Making Color Slides with an Intecolor Microcomputer," January 1980 BYTE, page 20), the slide can be produced inexpensively and the image can be modified easily. Points, lines, bars, and curves can be drawn to represent numeric data.

Unfortunately, writing the program that creates the screen image can be tedious and time-consuming. Many aspects of the program design, such as the selection of suitable scales and the conversion from user-units to screen-units, can be done by the computer. The subroutines given here in listing 1 have been written to provide a common set of routines that can be used to generate different kinds of graphs on a Compucolor II computer with a minimum of effort.

Design Considerations

Ergonomic texts (ie: those that analyze human engineering factors) suggest that scales are most convenient for the user if they are subdivided in steps that are powers of ten—1, 10, 100, 0.1, 0.001, etc. Double- and half-size steps (2 and 0.5) are also acceptable for intermediate ranges, although other scale intervals (such as 0.75, 1.5, 3, 4) should be avoided. Based on this, I have written

Writing the program that creates the screen image can be tedious and time-consuming.

subroutines to select a suitable step size from the series: 0.1, 0.2, 0.5, 1, 2, 5, 10, 20, 50....

The ideal number of steps depends upon the application. On graph paper, where fine measurements may be made, a large number of smaller steps is useful. On a video monitor or in a color slide, however, a smaller number of large steps is preferable because it is less confusing; around four to eight steps seem to be appropriate. The scale should start and end at a multiple of the step size.

A program that satisfies these criteria should be easy to write; some readers might want to stop at this point and write their own. Unfortunately, there are several pitfalls for the unwary. At several stages of the calculation and graph preparation, it is necessary to avoid calculation errors (for example, producing 2.99999 or 3.00001 instead of 3). Similarly, scale zero might be calculated as 1.000E-06, which looks odd if printed on a graph scale.

The first step of the scaling process is to calculate the range of the data, R, and make an initial guess for the value of the step size, JUMP. This value can be obtained from table 1, or it can be calculated from the following equation:

```
JUMP = 4 * 10↑(INT(0.434295
       *LOG(R/1.21)))
```

(This is essentially line 10315 of the BASIC program in listing 1; the constant 0.434295 is used to obtain the base-10 logarithm from the Compucolor BASIC LOG function, which returns the natural or base-e logarithm.)

Once the initial value of JUMP has been calculated, it is repeatedly divided by 2 until the resulting value for JUMP is less than or equal to one-fourth the value of the range R; this assures that the graph will have at least four steps in the range. The constant 1.21 is chosen to give the relationship between R and JUMP shown in table 1.

Implementation Notes

The program has been written, tested, and employed to illustrate this article on a Compucolor II. The BASIC interpreter recognizes two-letter variable names but tolerates longer names (ie: AXIS, AXES and AX are all equivalent). Names were chosen to avoid BASIC reserved words such as INT, OR, ON, STEP. Thus the variable COLOR has been spelled COLOUR, and JUMP has been used in place of STEP. For graphics work this version of the language employs the word PLOT followed by one or more arguments. Table 2 lists the more important plotting codes.

Text continued on page 138

SUPER BRAIN QD™


Once in a great while someone comes along with a simple improvement for an already great product. Take our SuperBrain, for example. Really a simple concept. A high-powered, low cost microcomputer packaged in an attractive desk top cabinet. So how do you improve on that?

WE DID IT...

It wasn't enough that our SuperBrain had such standard features as twin double density 5¼" drives with over 300,000 bytes of disk storage. A full 32K of dynamic RAM - expandable to 64K in seconds. A CP/M* Disk Operating System which assures compatibility to literally hundreds of application packages presently available. A crisp, 12" non-glare screen with a full 24 line by 80 column display. A full ASCII keyboard with a separate keypad and individual cursor control keys. Twin RS232C serial ports for fast and easy connection to a modem and/or a printer. And, dual Z80 processors which operate at 4 MHZ to insure lightning-fast program execution. No, it wasn't enough. So we made it better.

ANNOUNCING SUPERBRAIN QD...

Our new QD model has all of the features of our phenomenally popular SuperBrain with the addition of double-sided disk drives and an extra 32K of dynamic RAM. So, for only a modest increase in price, you can order your next SuperBrain with more than twice the disk and memory storage capability. But, best of all, the new QD model has the same tough, rugged construction and exceptional quality that made our SuperBrain such a success.

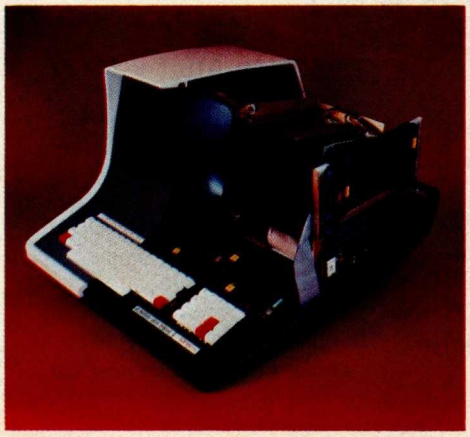

HOW DID WE DO IT?

The secret of SuperBrain QD's incredible disk storage lies within our new double-density double-sided disk drives. A total of nearly 720,000 bytes of data are formatted on two specially designed 5¼" drives. And that's more than enough to get you started with most serious small business applications. And SuperBrain QD's standard 64K of dynamic RAM will handle even the most complicated programming tasks.

Of course, if you're into megabytes instead of kilobytes, you may think neither SuperBrain is right for you. Not so! Intertec offers 20-96 megabytes of hard-disk storage which connects in seconds to either the SuperBrain or SuperBrain QD. So, your original investment is always protected. As you grow. No matter how much your needs expand.

BUT IS IT RELIABLE?

Our best salesmen are our present users. Not only have SuperBrain users been impressed with the inherent reliability of the system, they tell us that no other microcomputer system available today offers such a unique modular design concept. Just about the only tool required to easily maintain the system is a common screwdriver. And Intertec's total commitment to product service and customer support, with service outlets in most major cities, insures your original investment will be a valuable one for many years to come.

THE DECISION IS YOURS.

Whether your next SuperBrain is a regular model or our QD version, you will have the satisfaction of knowing you purchased what is becoming one of the world's most popular microcomputer systems. And regardless of which model you choose, you'll probably never outgrow it because you can keep expanding it.

So, call or write us today for more information. Intertec systems are distributed worldwide and may be available in your area now.

Circle 80 on inquiry card.

INTERTEC DATA SYSTEMS®

2300 Broad River Rd., Columbia, SC 29210
(803) 798-9100 TWX: 810-666-2115



*Registered trademark of Digital Research, Inc.



By Netronics

ASCII/BAUDOT, STAND ALONE

Computer Terminal

COMPLETE FOR ONLY . . . $149.95

The Netronics ASCII/BAUDOT Computer Terminal Kit is a microprocessor-controlled, stand alone keyboard/terminal requring no computer memory or software. It allows the use of either a 64 or 32 character by 16 line professional display format with selectable baud rate, RS232-C or 20 ma. output, full cursor control and 75 ohm composite video output.

The keyboard follows the standard typewriter configuration and generates the entire 128 character ASCII upper/lower case set with 96 printable characters. Features include onboard regulators, selectable parity, shift lock key, alpha lock jumper, a drive capability of one TTY load, and the ability to mate directly with almost any computer, including the new Explorer/85 and ELF products by Netronics.


The Computer Terminal requires no I/O mapping and includes 1k of memory, character generator, 2 key rollover, processor controlled cursor control, parallel ASCII/BAUDOT to serial conversion and serial to video processing—fully crystal controlled for superb accuracy. PC boards are the highest quality glass epoxy for the ultimate in reliability and long life.

VIDEO DISPLAY SPECIFICATIONS

The heart of the Netronics Computer Terminal is the microprocessor-controlled Netronics Video Display Board (VID) which allows the terminal to utilize either a parallel ASCII or BAUDOT signal source. The VID converts the parallel data to serial data which is then formatted to either RS232-C or 20 ma. current loop output, which can be connected to the serial I/O on your computer or other interface, i.e., Modem.

When connected to a computer, the computer must echo the character received. This data is received by the VID which processes the information, converting to data to video suitable to be displayed on a TV set (using an RF modulator) or on a video monitor. The VID generates the cursor, horizontal and vertical sync pulses and performs the housekeeping relative to which character and where it is to be displayed on the screen.

Video Output: *1.5 P/P into 75 ohm (EIA RS-170)* • **Baud Rate:** *110 and 300 ASCII* • **Outputs:** *RS232-C or 20 ma. current loop* • **ASCII Character Set:** *128 printable characters—*



BAUDOT Character Set: *A B C D E F G H I J K L M N O P Q R S T U V W X Y Z - ? : * 3 $ # ( ) . , 9 0 1 4 ! 5 7 ; 2 / 6 8* • **Cursor Modes:** *Home, Backspace, Horizontal Tab, Line Feed, Vertical Tab, Carriage Return. Two special cursor sequences are provided for absolute and relative X-Y cursor addressing* • **Cursor Control:** *Erase, End of Line, Erase of Screen, Form Feed, Delete* • **Monitor Operation:** *50 or 60Hz (jumper selectable.*

Continental U.S.A. Credit Card Buyers Outside Connecticut

CALL TOLL FREE 800-243-7428

To Order From Connecticut Or For Technical Assistance, Etc. **Call (203) 354-9375**

Netronics R&D Ltd., Dept. B11
333 Litchfield Road, New Milford, CT 06776

Please send the items checked below—

- ☐ **Netronics Stand Alone ASCII Keyboard/Computer Terminal Kit, $149.95** plus $3.00 postage & handling.
- ☐ **Deluxe Steel Cabinet** for Netronics Keyboard/Terminal In Blue/Black Finish, **$19.95** plus $2.50 postage and handling.
- ☐ **Video Display Board Kit** alone (less keyboard), **$89.95** plus $3 postage & handling.
- ☐ **12" Video Monitor** (10 MHz bandwidth) fully assembled and tested, **$139.95** plus $5 postage and handling.
- ☐ **RF Modulator Kit** (to use your TV set for a monitor), **$8.95** postpaid.
- ☐ **5 amp Power Supply Kit** In Deluxe Steel Cabinet (±8VDC @ 5 amps, plus 6-8 VAC), **$39.95** plus $2 postage & handling.

Total Enclosed (Conn. res. add sales tax) $_____

By—

☐ Personal Check ☐ Cashiers Check/Money Order

☐ **Visa** ☐ **Master Charge** (Bank # _ _ _ _)

Acct. # _____

Signature _____ Exp. Date _____

Print Name _____

Address _____

City _____

State _____ Zip _____

☐ **Send Me More Information**

Listing 1: *Collection of plotting subroutines and driver program for the Compucolor II. See text and listing remarks for further description of the subroutines.*

```
5 REM KY 5 REM      GRAPHS.  (C)  A. W. GROGONO.   AUG.  1979
6 REM       SUBROUTINES V1
40 RESTORE :CLEAR 200:DIM I$(12)
50 DATA 1,2,6,4:FOR I= 1TO 4:READ COLOUR(I):NEXT I
60 REM WRITE:  60 DIM(ARRAY(25,1))  TO USE EQUATION SUB
90 PLOT 29,27,24,15,14,2,255,6,1,12,3,16,3:REM CLEAR PAGE
100 REM
101 REM
110 REM  SUBROUTINES  7000 ERASE/REVIEW IMAGES
120 REM               9000 COMPLETE GRAPH OUTLINE
130 REM              10000 DATA ENTRY
140 REM              10100 EQUATION PLOTTING
150 REM              10200 FIND LITTLE AND BIG
160 REM              10300 CALCULATE DATA FOR BORDERS
170 REM              10500 DRAW BORDERS
180 REM              10700 CONVERT USER UNITS TO GRAPH
190 REM              10800 GRAPH UNITS TO TEXT POSITION
200 REM              11000 PLOT POINTS
210 REM              11100 PLOT VECTORS
220 REM              11200 PLOT Y-BARS
230 REM              11300 PLOT X-BARS
235 REM              11500 SAVE ON DISK
240 REM              11800 SELECT COLORS
250 REM              11900 PAUSE
260 REM
270 END
490 REM WRITE EQUATION AT 500, EG: 500 Y= X^2 - 3* X
510 RETURN
6900 REM
6901 REM
6902 REM   ERASE/REVIEW IMAGES
6903 REM
7000 PLOT 2,255,27,24,6,11,14,12,3,11,7:REM IMAGE ERASE/REVIEW
7005 FOR I= 1TO 12:I$(I)= CHR$ (48+ I- 7* (I> 9)):NEXT I
7010 PRINT "E R A S E / R E V I E W   I M A G E S":PRINT
7020 PRINT ,,"1.  REVIEW IMAGES.":PRINT
7030 PRINT ,,:INPUT "2.  ERASE IMAGES.  ENTER NUMBER: ";I
7040 IF I= 2THEN 7100
7050 I$= "REVIEWED":GOSUB 7200
7060 FOR I= LOWTO HIGH:PLOT 3,64,29,27,4:REM LOSE CURSOR
7070 PRINT "LOAD SCREEN.DIS;"+ I$(I):PLOT 27,27:REM IMAGE
7080 INPUT "";I$:NEXT I:RETURN
7100 I$= "ERASED":GOSUB 7200
7110 PLOT 27,4:FOR I= HIGHTO LOWSTEP - 1
7120 PRINT "DEL SCREEN.DIS;"+ I$(I):NEXT I
7130 PLOT 27,27:PRINT "IGNORE FCS ERROR - EFNF";
7140 PRINT " DURING RENAMING":PLOT 17,10,27,4
7150 J= HIGH- LOW+ 1:FOR I= LOWTO 12- J:REM CLOSE GAP
7160 PRINT "REN SCREEN.DIS;"+ I$(I+ J)+ "TO SCREEN.DIS;"+ I$(I)
7180 NEXT I:PLOT 27,27:RETURN
7200 PLOT 6,5* I- 4,12,27,4:PRINT "DIR":REM DIRECTORY
7210 PLOT 27,27:PRINT ,"IMAGES ARE LISTED  SCREEN.DIS;N  ";
7220 PRINT "WHERE N IS THE NUMBER.":PRINT
7230 PRINT ,"ENTER #S OF FIRST AND LAST IMAGES TO BE ";I$;":"
7235 PRINT :PRINT ,,"FOR A ENTER 10,  FOR B ENTER 11 ETC."
7240 PRINT :PRINT ,,:INPUT "FIRST ";LOW:REM
7250 PRINT :PRINT ,,:INPUT " LAST ";HIGH:REM
7260 PRINT :PRINT ,,:INPUT "PUSH RETURN TO ADVANCE";I$:RETURN
```

Listing 1 continued on page 130

Major Impact.



Meet IMP 2, the stylish impact printer with three way paper handling.

Designed for desk top use, this sleek unit combines an ultra-low profile with a unique fan-cooled printing system that can knock out 80, 96, or 132 columns of crisp hardcopy with continuous throughput of one line per second.

Three way paper handling. IMP 2 features three way paper handling for forms, single sheets and paper rolls, with tractors adjustable from 1.5 inch to 9½ inches. Software control of forms length, printer select/deselect together with a choice of three standard interfaces make IMP 2 the most versatile printer available in its price range.

Interfaces abound. IMP 2 provides parallel, RS232C and 20mA current loop as standard equipment. But if you need something special, we can supply interfaces for just about any system — high speed serial, Apple, Pet, TRS-80, IEEE 488... you name it.

Versatile character sets. 96 ASCII character set is standard. And you can select six character sizes, even graphics, under software control. Options include full page buffering and special character sets.

Service — a big difference. No other printer manufacturer offers Axiom's combination of low cost plus nation-wide service and distribution — in the USA and 18 overseas countries.

Pssst — the price!!! With all this performance, the price is low. Just $795 for IMP 2 ($695 for IMP 1, without tractor feed). And that's the single unit price.

Better phone, write or mail the bingo card today!


AXIOM

AXIOM CORPORATION

5932 San Fernando Road, Glendale, CA 91202
Tel: (213) 245-9244 • TWX: 910-497-2283

Circle 81 on inquiry card.

The days of complicated, unreliable, dynamic RAM are gone:



INTRODUCING

JAWS

the ultrabyte memory board

$199.95 (*complete kit with 16K memory*)

Netronics consistently offers innovative products at unbeatable prices. And here we go again — with JAWS, the ultrabyte 64K S100 memory board.

ONE CHIP DOES IT ALL

JAWS solves the problems of dynamic RAM with a state-of-the-art chip from Intel that does it *all*. Intel's single chip 64K dynamic RAM controller eliminates high-current logic parts . . . delay lines . . . massive heat sinks . . . unreliable trick circuits.

REMARKABLE FEATURES OF JAWS

Look what JAWS offers you: Hidden refresh . . . fast performance . . . low power consumption . . . latched data outputs . . . 200 NS 4116 RAMs . . . on-board crystal . . . 8K bank selectable . . . fully socketed . . . solder mask on both sides of board . . . designed for 8080, 8085, and Z80 bus signals . . . works in Explorer, Sol, Horizon, as well as all other well-designed S100 computers.

GIVE YOUR COMPUTER A BIG BYTE OF MEMORY POWER WITH JAWS — SAVE UP TO $90 ON INTRODUCTORY LIMITED-OFFER SPECIAL PRICES!

UNDECIDED? *TRY A WIRED 16K JAWS IN YOUR COMPUTER ON OUR 10-DAY MONEY- BACK OFFER (SPECIFY YOUR COMPUTER).*

CONTINENTAL U.S.A. CREDIT CARD BUYERS OUT SIDE CONNECTICUT CALL

CALL TOLL FREE 800-243-7428

From Connecticut Or For Assistance, (203) 354-9375

NETRONICS RESEARCH & DEVELOPMENT LTD. Dept. B11

333 Litchfield Road, New Milford, CT 06776

Please send the items checked below:

- ☐ **JAWS 16K RAM kit,** No. 6416, $199.95.*
- ☐ **JAWS 16K RAM fully assembled, tested, burned in,** No. 6416W, $229.95.*
- ☐ **JAWS 32K RAM kit,** No. 6432, (reg. price $329.95), **SPECIAL PRICE $299.95.***
- ☐ **JAWS 32K RAM fully assembled, tested, burned in,** No. 6432W, (reg. price $369.95), **SPECIAL PRICE $339.95.***
- ☐ **JAWS 48K RAM kit,** No. 6448, (reg. price $459.95), **SPECIAL PRICE $399.95.***
- ☐ **JAWS 48K fully assembled, tested, burned in,** No. 6448W, (reg. price $509.95), **SPECIAL PRICE $449.95.***
- ☐ **JAWS 64K RAM kit,** No. 6464, (reg. price $589.95), **SPECIAL PRICE $499.95.***
- ☐ **JAWS 64K RAM fully assembled, tested, burned in,** No. 6464W, (reg. price $649.95), **SPECIAL PRICE $559.95.***
- ☐ **Expansion kit, JAWS 16K RAM module,** to expand any of the above in 16K blocks up to 64K, No. 16EXP, $129.95.*

*All prices plus $2 postage and handling. Connecticut residents add sales tax.

Total enclosed: $_____

☐ Personal Check ☐ Money order or Cashiers Check

☐ VISA ☐ MASTER CHARGE (Bank No. ____)

Acct. No. _____ Exp. Date _____

Signature _____

Print Name _____

Address _____

City _____

State _____ Zip _____

☐ Send me more information

Listing 1 continued:

```
8988 REM
8989 REM
8990 REM   PREPARE COMPLETE GRAPH OUTLINE
8991 REM
8992 REM            CALCULATES LIMITS, SCALE VALUES AND
8993 REM            DRAWS OUTLINE WITH TIC MARKS, SCALES,
8994 REM            TITLE AND AXES LABELS
8995 REM
9000 REM GRAPH OUTLINE
9010 GOSUB 10200:REM DATA RANGE
9020 GOSUB 10300:REM AUTOSCALE
9030 GOSUB 10500:RETURN :REM FRAME
9980 REM
9981 REM
9982 REM   ENTER:
9983 REM
9984 REM            TITLE$
9985 REM            NUMBER  OF DATA POINTS
9986 REM            LABEL$(0)  FOR X-AXIS
9987 REM            LABEL$(1)  FOR Y-AXIS
9988 REM            ARRAY(NUMBER,2)  OF DATA POINTS
9989 REM
9990 REM    NOTE: IF  CHOICE  = 1 THEN ONLY 1 AXIS IS ENTERED
9991 REM
10000 PLOT 6,1,12,14,3,18,13:REM DATA ENTRY
10010 PRINT "D A T A   E N T R Y"
10015 PLOT 10,9,9:INPUT "GRAPH TITLE: ";TITLE$
10020 PLOT 10,9,9:INPUT "NUMBER OF DATA POINTS: ";NUMBER
10021 DIM ARRAY(NUMBER+ 2,2)
10024 PLOT 10,9,9:INPUT "X-AXIS UNITS, INDEPENDANT: ";LABEL$(0)
10025 IF CHOICE= 1THEN LABEL$(1)= "NUMBER":GOTO 10030
10026 PLOT 10,9,9:INPUT "Y-AXIS UNITS,   DEPENDANT: ";LABEL$(1)
10028 LABEL$(2)= LABEL$(1)
10030 FOR ITEM= 1TO NUMBER:REM ENTER POINTS
10040 IF ITEM- 1< > 10* INT ((ITEM- 1)/ 10)THEN 10060:REM PAGE
10050 PLOT 12,10,10:PRINT "POINT",,LABEL$(0):REM
10055 IF CHOICE< > 1THEN PLOT 28:PRINT ,,,,"";LABEL$(1)
10060 IF ITEM- 1= 5* INT ((ITEM- 1)/ 5)THEN PLOT 10:REM SPACE
10070 PRINT :PRINT "";ITEM,,:INPUT "";ARRAY(ITEM,0):REM
10075 IF CHOICE= 1THEN NEXT ITEM:RETURN
10080 PLOT 28,18,9,9,9,9:INPUT "";ARRAY(ITEM,1)
10085 ARRAY(ITEM,2)= ARRAY(ITEM,1):NEXT ITEM:RETURN
10090 REM
10091 REM
10092 REM   WRITE EQUATION
10093 REM
10094 REM            TESTS IS THE EQUATION WRITTEN
10095 REM            INPUT  LITTLE(0)
10096 REM            INPUT  BIG(0)
10097 REM            CALCULATES  ARRAY(25,2)  FROM EQUATION
10098 REM
10100 PLOT 6,5,14,12,3,12,7:REM EQUATION PLOTTING
10110 PRINT "E Q U A T I O N   P L O T T I N G":PRINT :REM
10120 NUMBER= 25:X= 1:Y= .9999:GOSUB 490
10130 IF Y< > .9999THEN 10140:REM JUMP IF EQUATION AT LINE 500
10132 PLOT 3,16,11:PRINT "TYPE EQUATION AT LINE 500":PRINT
10133 PRINT ,,"USING THE RULES OF BASIC.":PRINT :PRINT
10134 PRINT ,,"EXAMPLE:  500 Y=X^2-3*X":PRINT :REM
10135 PRINT ,,"NOW TYPE  500 .....":PRINT
10136 PRINT ,,"THEN TYPE  RUN  AND PRESS  RETURN":END
```

Listing 1 continued on page 132

Circle 82 on inquiry card. →



EVERYONE WINS

Selecting software for your Ohio Scientific computer is a chancy task at best. There are few trustworthy vendors with a national reputation. There are no consistent quality standards and the documentation is often cryptic and inaccurate. If you are lucky enough to find a good package, there's no guarantee of ongoing support. A wrong choice results in months of wasted time, effort, and money.

With the Software Federation, you no longer take that risk. The Software Federation was formed by three of the largest Ohio Scientific hardware distributors to select and market quality software through reputable dealers nationwide.

AUTHORS

The Software Federation solves the independent vendor's problems by providing a proprietary method of software protection, aggressive enforcement of software licenses, a strong dealer base, primary support, and national advertising.

DEALERS

The Software Federation solves the dealer's problems by providing low cost access to high quality software with the sort of demonstration packages, documentation, and support that the dealer needs to successfully sell machines.

END USERS

The Software Federation solves the user's problems by providing quality software, exceptional documentation, after-the-sale support, and optional software maintenance services.

Why risk making the wrong choice? With the Software Federation, everyone wins!

See the dealer in your area for a complete turnkey demonstration.

Software Packages

BUS-I Original of popular series, sold "as is" **$99**
BUS-II Unlicensed version of BUS-I **$150**
BUS/DMS Most current version of BUS series, completely reworked, DMS compatible **$850**
fig-FORTH A complete Forth Interest Group version for OSI. Not a kludge **$175**
MEMTEST/2 New edition of popular memory test **$50**
WP-INT Interface between WP-2 and OSI-DMS for form letters **$80**
Amway Distributors Package $995
DATA DIRECTOR Complete rewrite of OSI-DMS Nucleus by BBS, command oriented, very interactive **$995**
System Exerciser Self-prompting test routines for end user troubleshooting **$60**
Med-Bill/Faragher Single doctor client billing **$995**
Manufacturing Control System Hard disk based. Standalone inventory with job costing and bill-of-materials **$3500**
Fast Floppy Dumper Floppy disk backup for hard disk systems **$125**
WP6502 65U word processor from DQFLS **$125**
USUS Software Exchange Library 6 disk set of UCSD Pascal programs, includes USUS membership **$80**
Mailer Text processor, keyed files & sort capability, good mass mailer, DMS compatible **$190**
Payroll Very thorough package for floppy or hard disk, DMS compatible **$495**
General Ledger Multi-division/department support, journal based, floppy or hard disk, DMS compatible **$495**

Affiliated Dealers

TriComp Inc. Denver, CO 80221
Total Data Systems Ft. Collins, CO 80525
Data Services Computer Corp. Denver, CO 80239
Tra-Sta Computer Shoppe Pueblo, CO 81005
Business Data Systems, Inc. Boulder, CO 80301
Tek-Aids Industries Inc. Arlington Hts., IL 60004
KMH Galesburg, IL 61401
Practical Computer Springfield, IL 62703
Databus Grayslake, IL 60038
MAP Systems Peoria Hts., IL 61614
Business Computer of Joliet Cresthill, IL 60435
Cybertronics Houston, TX 77084
CSB Houston, TX 77057
Computer Management Systems Mitchell, SD 57301
Frisch Computer St. Paul, MN 55113
Farragher & Assoc. Milwaukee, WI 53213
Specialized Computer Systems Jackson, MI 49204
Community Computers Arlington, VA 22201
Delta Data Distributors Memphis, TN 38118
International Automation New Kensington, PA 15608
Whitlock International, Inc. Detroit, MI 48219

Software Federation INC
44 University Drive
Arlington Hts., IL 60004
Phone: 312/259-1355

TM

OUR PRICES ARE TOO LOW TO ADVERTISE!

CHECK THEM—CALL TOLL FREE!

800-243-7428

LOOK WHAT WE OFFER!

- **HAZELTINE** Terminals
- **CENTRONICS** Printers
- **LEAR-SIEGLER** Terminals/Printers
- **DATAPRODUCTS** Printers
- **ANADEX** Printers

BE SMART-DON'T BUY UNTIL YOU CHECK OUR PRICES!

_____ MASTERCHARGE
_____ VISA _____ COD
_____ PERSONAL CHECK
_____ MONEY ORDER

NETRONICS
RESEARCH & DEVELOPMENT, LTD.
333 Litchfield Rd., New Milford, CT 06776

Listing 1 continued:

```
10140 IF TITLE$< > ""THEN 10145
10142 PRINT :PRINT ,,"ENTER TITLE (E.G: EQUATION): "
10143 PRINT :PRINT ,,:INPUT "";TITLE$
10145 PRINT :PRINT ,,:INPUT "ENTER LOWEST X VALUE: ";LITTLE(0)
10150 PRINT :PRINT ,,:INPUT "     HIGHEST X VALUE: ";BIG(0)
10160 X= LITTLE(0):FOR ITEM= 1TO 25:GOSUB 490:REM Y FROM EQUAN
10170 ARRAY(ITEM,0)= X:ARRAY(ITEM,1)= Y
10180 X= X+ (BIG(0)- LITTLE(0))/ 24:NEXT ITEM:RETURN :REM INC X
10190 REM
10191 REM
10192 REM   FIND LITTLE(AXIS) AND BIG(AXIS)
10193 REM             FROM  ARRAY(NUMBER,1) IN BOTH AXES
10194 REM
10200 FOR AXIS= 0TO 1:GOSUB 10210:NEXT AXIS:RETURN :REM LO, HI
10210 LITTLE(AXIS)= ARRAY(1,AXIS):BIG(AXIS)= ARRAY(1,AXIS)
10215 FOR ITEM= 1TO NUMBER
10220 IF ARRAY(ITEM,AXIS)> LITTLE(AXIS)THEN 10230
10225 LITTLE(AXIS)= ARRAY(ITEM,AXIS)
10230 IF ARRAY(ITEM,AXIS)< BIG(AXIS)THEN 10240
10235 BIG(AXIS)= ARRAY(ITEM,AXIS)
10240 NEXT ITEM:RETURN
10288 REM
10289 REM
10290 REM   CALCULATE FRAME FROM LITTLE(AXIS) AND BIG(AXIS)
10291 REM
10292 REM             JUMP(AXIS)   IS STEP LENGTH
10293 REM             LOW(AXIS)    IS SCALE LOW
10294 REM             HIGH(AXIS)   IS SCALE HIGH
10295 REM             SCALE(AXIS)  IS SCALE LENGTH
10296 REM             GAPS(AXIS)   IS NUMBER OF STEPS
10297 REM
10300 FOR AXIS= 0TO 1:GOSUB 10310:NEXT AXIS:RETURN :REM SCALE
10310 RANGE= (BIG(AXIS)- LITTLE(AXIS))/ 1.21
10315 JUMP(AXIS)= 4* 10^ (INT (.434295* LOG (RANGE)))
10320 DEF FN I(I)= JUMP(AXIS)* INT (I/ JUMP(AXIS)+ .0001)
10325 FOR I= 1TO 3:JUMP(AXIS)= JUMP(AXIS)/ 2
10330 HIGH(AXIS)= - FN I(- BIG(AXIS))
10340 LOW(AXIS)= FN I(LITTLE(AXIS))
10350 SCALE(AXIS)= HIGH(AXIS)- LOW(AXIS)
10360 GAPS(AXIS)= INT (1.0001* SCALE(AXIS)/ JUMP(AXIS))
10370 IF GAPS(AXIS)< 4THEN NEXT I
10380 EVEN= 2* JUMP(AXIS)* INT (- SCALE(AXIS)/ JUMP(AXIS)/ 2.1)
10390 HIGH(AXIS)= LOW(AXIS)- EVEN
10395 SCALE(AXIS)= HIGH(AXIS)- LOW(AXIS):RETURN
10480 REM
10481 REM
10482 REM   DRAW BORDERS WITH SCALES AND TITLES
10483 REM
10484 REM             USER MAY ALTER
10485 REM             MINSCREEN(AXIS)  AND  MAXSCREEN(AXIS) BUT
10486 REM             SELECT VALUES TO MAKE
10487 REM             RANGE  A MULTIPLE OF 24.   ALSO:
10489 REM
10490 REM             IN 0 AXIS VALUES MUST BE MULTIPLES OF 2
10491 REM             IN 1 AXIS VALUES MUST BE MULTIPLES OF 4
10492 REM
10493 REM             RATIO(AXIS)  IS CALCULATED FROM
10494 REM             RANGE  AND  SCALE(AXIS)
10495 REM
```

Listing 1 continued on page 134

The best news since CP/M... customizable full screen editing

North Star **Sorcerer**
Heath H8/H89 **TRS-80 Model I**
Super Brain **TRS-80 Model II**

Most other CP/M Systems with CRT or Memory Mapped Displays.

Changes You Make On the Screen Become The Changes to the File.

Full screen editing is the fastest and easiest method of editing all types of text files. Straight forward enough for novices, yet also the choice of professionals. VEDIT is a proven full screen editor with unequalled features. You will appreciate that you can easily edit 10 times faster than with a command editor. Since VEDIT is customizable, it adapts to your applications and preferences, instead of requiring you to adapt to it.

VEDIT is ideally suited to program development and it's special features make it the most valuable development tool a programmer can have. VEDIT appeals to word processing users too. Many simple text editing tasks, such as mailing lists, are faster and easier to do with VEDIT than with more complex word processors.

Features of VEDIT:

Full screen editor with status line and cursor. The screen continuously displays the region of the file being edited. Changes are made by first moving the cursor to the text you wish to change. You can then overtype, insert any amount of new text or hit a function key. These changes are immediately reflected on the screen and become the changes to the file.

Full array of cursor movements with single key movement to begin and end of lines and to tab positions.

Function keys for character delete, line delete and allowing line splitting and concatenating.

Text movement is very easy using a text register.

Flexible command mode allows global search and substitute, repetitive editing operations.

File handling allows files to be merged on input, split on output, drive selection and more. Blocks of text are readily copied from one file to another.

Disk buffering can automatically perform Read/Write for files larger than available main memory.

Tabs settable to any positions. Tab key inserts tab character or spaces to next tab position.

Extensive 60 page, clearly written manual with sections for both the beginning and experienced user.

You Customize the Fastest Editor for Word Processing, C-Basic, Fortran and Assembler:

Keyboard layout for all cursor and function keys.
Your screen size. (Up to 70 lines, 200 columns).
Default Tab positions and various parameters.
Scrolling methods.
Cursor type, blinking, reverse video.
Its ideal for diverse hardware, keyboards and applications.
For OEMs too.

Ordering: Specify your CRT terminal type, video board or microcomputer, the 8080/Z80 or Z80 code version, and disk format required.

Standard Package: Disk and manual **$110**
Manual: Price refunded with software purchase **$ 15**
PIICEON V-100: 24 X 80 Video display board ... **$445**

VISA and MASTER CHARGE Welcome.
Attractive Dealer Terms.

See us at Northeast Computer Show Booth 418

Compuview Products, Inc.


618 Louise / Ann Arbor, Michigan 48103 **Call Anytime - (313) 996-1299**

Circle 83 on inquiry card.

Now-Break Through The 64K Micro-Memory Limit!

SWEET SIXTEEN

Bank Selectable 16K Static RAM



SAVE $50.00
LIMITED TIME OFFER

Don't buy any more antique RAMs (RAM without bank select) — now there's Netronic's new SWEET SIXTEEN board featuring a universal software bank select system. SWEET SIXTEEN is capable of addressing 2,048 different banks. With SWEET SIXTEEN boards you can add memory beyond the 64K limit, or expand to a multi-terminal system.

LOOK AT THESE FEATURES:

- **300 NS, low power 2114's.**
- **Software Bank Selector** — Universal decoder works with Cromenco, Alpha Micro, Netronics, most other systems, or your design. Onboard dip switches: Bank Select Enable; Reset Enable; Reset Disable; Port Address; Port Data.
- **All Inputs And Outputs** meet the proposed IEEE standards for the S-100 bus.
- **4.0 MHz Operation.**
- **Schmitt Trigger Buffer** on all signals for maximum noise immunity.
- **Addressable On 16k Boundaries,** 0-64k, dip switch selectable.
- **Phantom Option,** dip switch selectable.
- **PWR/MWRITE Option,** dip switch selectable.
- **LED Indicator** to display status.
- **Glass Epoxy PC Board** with gold-plated contacts and double-sided solder mask.
- **Fully Socketed.**
- **Four Separate Regulators** for maximum stability.

10-Day Money-Back Policy For Wired & Tested Unit: Try a fully wired board — then either keep it, return it for kit, or simply return it in working condition.

Continental U.S.A. Credit Card Buyers Outside Connecticut:

CALL TOLL FREE:
800-243-7428

From Connecticut Or For Assistance:
(203) 354-9375

Please send the items checked below:

☐ **SWEET SIXTEEN kit; No. S-16** . . . (reg. price $249.95) now $199.95*

☐ **SWEET SIXTEEN, fully assembled, tested, burned in; No. S-16W** . . . (reg. price $289.95) now $239.95*

*Plus $2 postage & insurance. Connecticut residents add sales tax.

Total Enclosed: $ _____

☐ Personal Check ☐ Money Order/Cashier's Check
☐ VISA ☐ Master Charge (Bank No. _____)

Acct. No. _____ Exp. Date_____

Signature _____

Print
Name _____

Address _____

City _____

State_____ Zip _____

NETRONICS
RESEARCH & DEVELOPMENT, LTD.
333 Litchfield Rd., New Milford, CT 06776

Listing 1 continued:

```
10496 REM              PLACE  IS CALCULATED FOR
10497 REM              TIC MARKS AND SCALE NUMBERS
10498 REM
10500 PLOT 2,255,27,24,29,15,6,COLOUR(1),12:REM DRAW FRAME
10505 MINSCREEN(0)= 18:MAXSCREEN(0)= 114
10510 MINSCREEN(1)= 16:MAXSCREEN(1)= 112
10515 FOR AXIS= 0TO 1:RANGE= MAXSCREEN(AXIS)- MINSCREEN(AXIS)
10520 RATIO(AXIS)= RANGE/ SCALE(AXIS):NEXT AXIS
10522 PLOT 3,(MAXSCREEN(0)+ MINSCREEN(0))/ 4- LEN (TITLE$)/ 2
10523 PLOT 29- MAXSCREEN(1)/ 4:PRINT TITLE$
10525 FOR AXIS= 0TO 1
10530 PLOT 6,COLOUR(1),2,250- 4* AXIS,MINSCREEN(AXIS)- 1
10540 PLOT MINSCREEN(1- AXIS)- 1
10545 PLOT MAXSCREEN(AXIS)+ 2- 2* (AXIS= 1)
10550 PLOT MAXSCREEN(1- AXIS)+ 2- 2* (AXIS= 0)
10555 PLOT MAXSCREEN(AXIS)+ 2- 2* (AXIS= 1),255
10560 J= JUMP(AXIS)/ 2
10565 FOR PLACE= LOW(AXIS)TO HIGH(AXIS)+ JSTEP JUMP(AXIS)
10570 GOSUB 10700:REM TIC MARKS
10580 GRAPH(1- AXIS)= MINSCREEN(1- AXIS)- 2:REM OUTSIDE FRAME
10590 PLOT 6,COLOUR(1):GOSUB 11010
10600 PLOT 6,COLOUR(2):REM NUMBERS
10620 IF ABS (PLACE)< JUMP(AXIS)/ 2THEN PLACE= 0:REM NO EXPON
10630 GRAPH(1- AXIS)= MINSCREEN(1- AXIS)- 8+ 4* AXIS
10640 GOSUB 10800:PLACE$= STR$ (PLACE)
10650 PLOT 3,TEXT(0)- LEN (PLACE$)/ (2- AXIS),TEXT(1)
10660 PRINT PLACE$:NEXT PLACE:NEXT AXIS
10662 PLOT 3,MAXSCREEN(0)/ 2- 4- LEN (LABEL$(0))
10664 PLOT 34- MINSCREEN(1)/ 4:PRINT LABEL$(0)
10666 PLOT 3,MINSCREEN(0)/ 2- 6,29- MAXSCREEN(1)/ 4
10670 PRINT LABEL$(1):RETURN
10688 REM
10689 REM
10690 REM   CALCULATE SCREEN GRAPH POSITION
10691 REM
10692 REM              CONVERTS  PLACE  IN USER UNITS
10693 REM              TO  GRAPH(AXIS)  FROM
10694 REM              RATIO(AXIS), LOW(AXIS), MINSCREEN(AXIS)
10695 REM
10700 J= RATIO(AXIS)* (PLACE- LOW(AXIS)):REM CONVERT USER UNITS
10710 GRAPH(AXIS)= MINSCREEN(AXIS)+ J+ .0001:RETURN
10790 REM
10791 REM
10792 REM   CALCULATE SCREEN TEXT POSITION
10793 REM
10794 REM              CONVERTS  GRAPH(AXIS)  PLOTTING UNITS
10795 REM              TO  TEXT(AXIS)  FOR CURSOR POSITION
10796 REM
10800 TEXT(0)= GRAPH(0)/ 2:REM GRAPH UNITS TO CURSOR POS
10810 TEXT(1)= INT (31.75- GRAPH(1)/ 4):RETURN
10988 REM
10989 REM
10990 REM   PLOT POINTS OR LINES
10991 REM
10992 REM              ARRAY(NUMBER,1)  IS PLOTTED EITHER
10993 REM              AS POINTS OR AS CONTINUOUS LINE
10994 REM
11000 FLAG= 1:GOSUB 11150:RETURN :REM POINTS
11010 PLOT 2,GRAPH(0),GRAPH(1),255:RETURN :REM POINT
```

Listing 1 continued on page 138

Circle 84 on inquiry card. →

The Perfect Fit

The Micromodem II data communications system and the Apple II* computer. What better combination to maximize the capabilities of your personal computer!

This popular direct connect modem can transmit data between an Apple II and another Apple II, a terminal, another microcomputer, minicomputer or even a large time-sharing computer anywhere in North America. The Micromodem II has unique automatic dialing and answer capabilities which further increases the communications possibilities between the Apple II and another computer or terminal.

You can send and/or receive messages or data when you are out of your office, home or out of town. Your branch business locations can communicate with each other regarding inventory and other matters over the phone. Or you can communicate with friends across the country. And you can access information utilities like the SOURCE for various business and personal applications.

The Micromodem II consists of two parts. One part includes the printed circuit board which holds the Micromodem II, ROM firmware and the serial interface. The board plugs directly into the Apple II providing all the functions of a serial interface card plus programmable auto dialing and auto answer capabilities. The on-board ROM firmware enables the Micromodem II to operate in any of three modes to perform different tasks-terminal mode, remote console and program control mode.

The other part of the Micromodem II datacomm system is a Microcoupler which connects the Micromodem board and Apple II to a telephone line. The Microcoupler gets a dial tone, dials numbers, answers the phone and hangs up when a transmission is over. There are none of the losses or distortions associated with acoustic couplers. The Microcoupler is compatible with any North American standard telephone lines and is FCC-approved for direct connection in the U.S. It works with standard dial phone service or Touch-tone service.


The Micromodem II is completely compatible with Bell 103-type modems. Full and half-duplex operating modes are available as well as speed selectable transmission rates of 110 and 300 bps.


Why not increase your Apple II's capabilities by outfitting it with the sophisticated Micromodem II data communications system? The Micromodem II is available at retail computer stores nationwide. For the store nearest you, call or write:

Hayes™

Hayes Microcomputer Products Inc.
5835 Peachtree Corners East, Norcross, Georgia 30092 (404) 449-8791

™ Micromodem II is a trademark of Hayes Microcomputer Products, Inc.
*Apple II is a registered trademark of Apple Computer Inc.
The Micromodem II can also be used with the Bell & Howell computer.

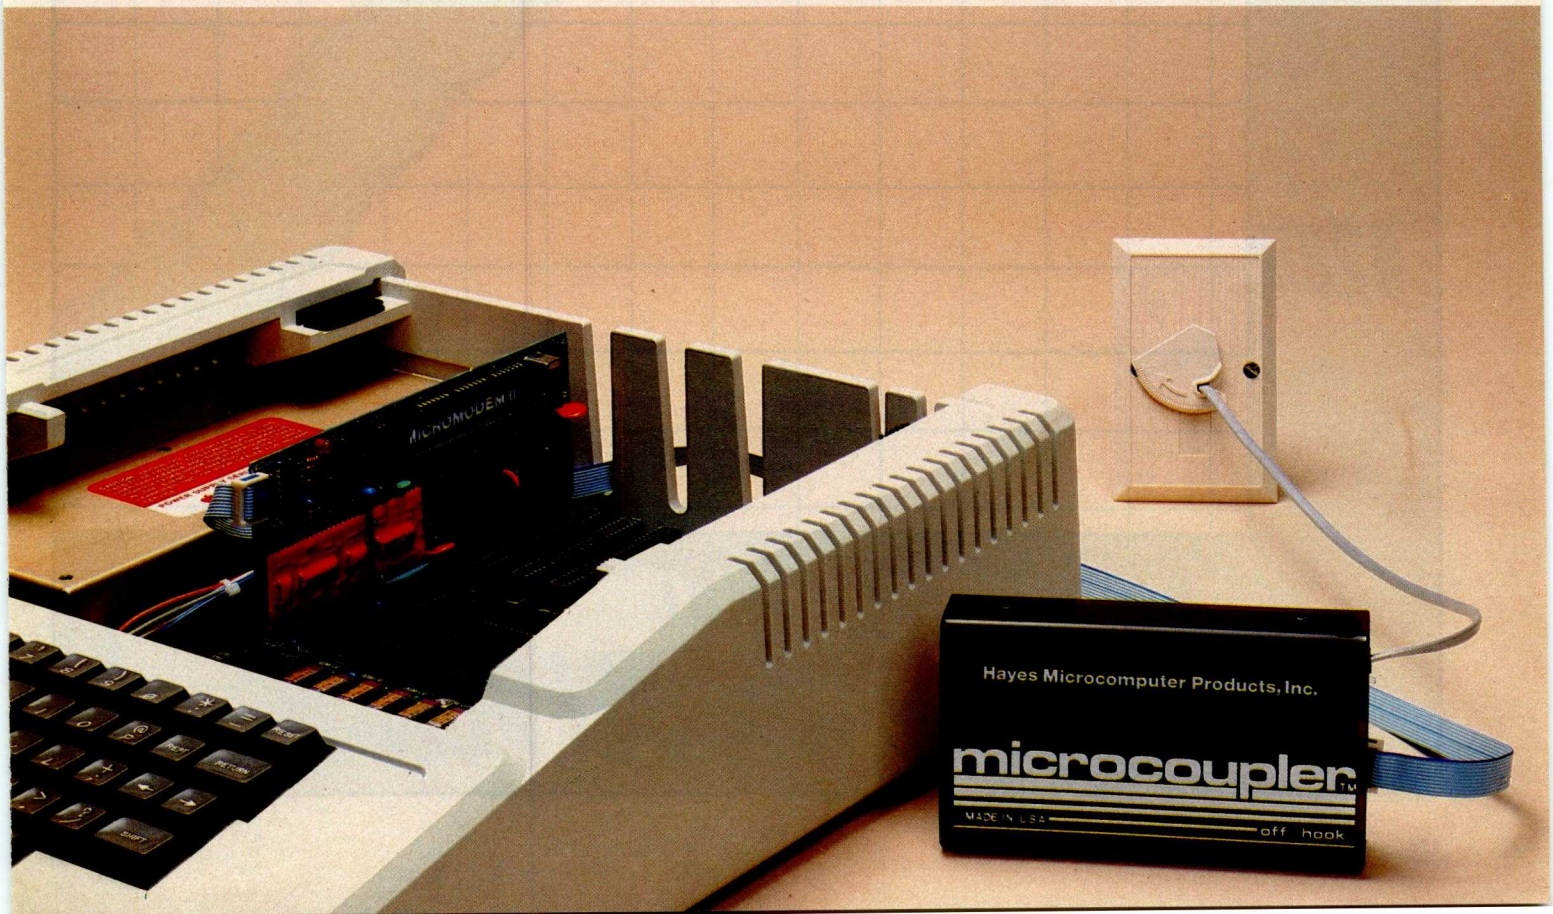

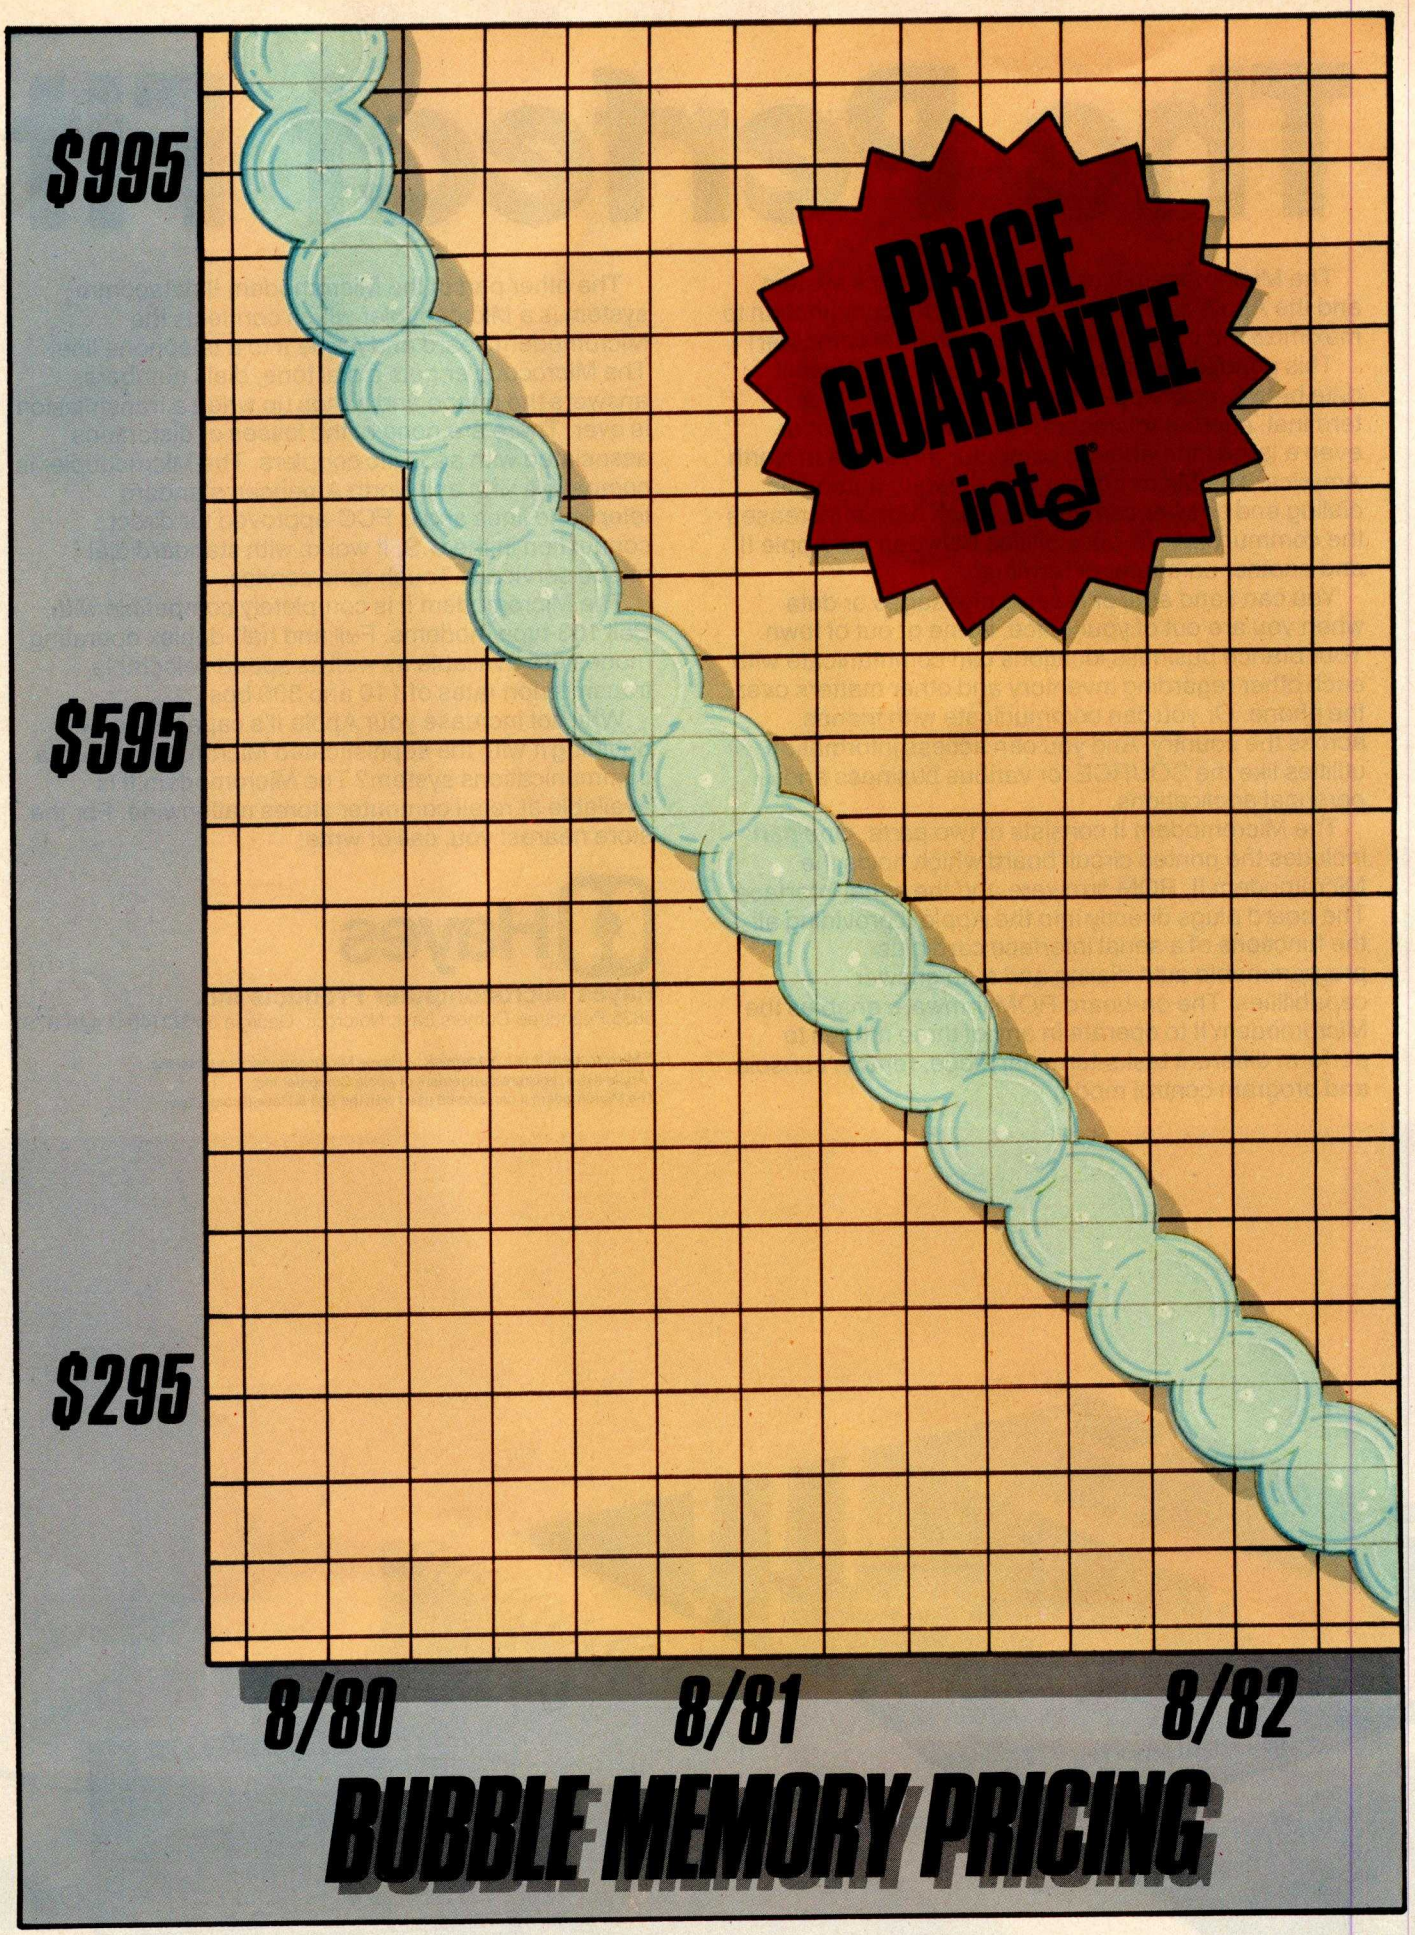
$995
$595
$295
PRICE GUARANTEE
intel
8/80
8/81
8/82
BUBBLE MEMORY PRICING

Bubble Price Break

Intel reduces prototyping prices of 1-megabit bubble memories by 40% now. And guarantees a volume price of $595 for complete component sets by August 1981.

Fast-breaking bubble technology. You've been hearing about it for years. Now Intel announces the kind of break you've been waiting for: a price break.

On August 11th, Intel lowered its 100-unit price for the BPK72 Bubble Memory Kit by 40% to $995—less than 100 millicents per bit.

By August 1981, the price of megabit bubble memories ordered in 5,000-unit lots will be an unprecedented $595. That's 60 millicents per bit. Not "projected." Not "expected." *Guaranteed.*

One year later, for 25,000-piece orders, the unit price will be $295—cutting the per-bit price in half once more. Again, we guarantee it.

How can Intel guarantee such a sharp price reduction? Simple. Intel was the first to bring production 1-megabit bubble memories to market. We've been delivering them for over a year, for a wide range of applications, and now we're moving prices down the manufacturing learning curve.

Get more than bubbles

Intel's bubble memory is a complete set of bubble components for microprocessor-based applications. This set consists of six special support ICs: a controller, a formatter/sense amp., three packages for coil driving and a current pulse generator. It interfaces to Intel® and other microprocessor system buses via the controller, which handles up to eight bubble memory packages, and provides built-in power fail protection and error correction.

The bubble element and its small set of associated ICs can be treated as a peripheral subsystem. This allows designers to concentrate on higher level system objectives, instead of spending time learning the intimate details of bubble device interfacing. Thus minimizing expense in hardware and software development.

Add more value to your product

With Intel's solid-state bubble memory, all that moves is the information. That means high reliability and low maintenance for your products, even in harsh or unclean environments—the kind where disks and tapes won't go. And since the memory is completely nonvolatile, your data



remains secure when the power goes off. No battery backup or replacement is necessary.

Furthermore, Intel's bubble memory system is small, lightweight and silent. By packing over 1 million bits into less than 100 square centimeters of board space, it allows you to reduce the size, weight and power consumption of your products.

As the natural mass storage for LSI microprocessor-based systems, Intel's megabit bubble memory makes it practical to design more features into your equipment. So now you can build in programmability. Portability. Reduced service and repair costs. All with ensured data integrity, even in hostile environments. Consider what that means in your applications.

Start designing now

Everything you need to start designing your next generation product is included in our Bubble Memory Prototype Kit (BPK72), available now from distributor stock. It contains all the components necessary for a 1-megabit system, plus a printed circuit board and complete documentation.

To find out how bubble memories can give you that competitive edge in your next project—and to receive our bubble brochure, contact your local Intel sales office/distributor. Better yet, have one of our field sales engineers give you a firm quote based on exactly what you need for your next product. Write Intel Corporation, 3065 Bowers Avenue, Santa Clara, CA 95051. Or call (408) 987-8080.

intel® delivers solutions.

Europe: Intel International, Brussels, Belgium.
Japan: Intel Japan, Tokyo. United States and Canadian distributors: Alliance, Almac/Stroum, Arrow Electronics, Avnet Electronics, Component Specialties, Hamilton/Avnet, Hamilton/Electro Sales, Harvey, Industrial Components, Pioneer, L.A. Varah, Wyle Distribution Group, Zentronics.

Circle 85 on inquiry card.

Listing 1 continued:

```
11020 PLOT 2,242,GRAPH(0),GRAPH(1),255:RETURN :REM VECTOR
11100 FLAG= 0:GOSUB 11150:RETURN :REM VECTORS
11150 PLOT 6,COLOUR(3):FOR ITEM= 1TO NUMBER:FOR AXIS= 0TO 1
11160 PLACE= ARRAY(ITEM,AXIS):GOSUB 10700:NEXT AXIS
11170 ON 2+ (ITEM= 1OR FLAG= 1)GOSUB 11010,11020
11180 NEXT ITEM:RETURN
11188 REM
11189 REM
11190 REM   PLOT BAR GRAPHS
11191 REM
11192 REM            ARRAY(NUMBER,1)  IS PLOTTED EITHER
11193 REM            AS VERTICAL OR AS HORIZONTAL BARS
11194 REM
11200 FLAG= 1:GOSUB 11310:RETURN :REM Y-BAR
11300 FLAG= 0:GOSUB 11310:RETURN :REM X-BAR
11310 COLOUR= 2:FOR ITEM= 1TO NUMBER
11320 COLOUR= COLOUR+ 1+ 2* (COLOUR= 4):PLOT 6,COLOUR(COLOUR)
11330 FOR AXIS= 0TO 1:PLACE= ARRAY(ITEM,AXIS)
11340 GOSUB 10700:NEXT AXIS
11350 PLOT 2,250- FLAG* 4,MINSCREEN(FLAG):REM X OR Y BAR
11360 FOR I= GRAPH(1- FLAG)TO GRAPH(1- FLAG)+ 1
11370 PLOT I,GRAPH(FLAG):NEXT I:PLOT 255:NEXT ITEM:RETURN
11490 REM
11491 REM
11492 REM   SAVE IMAGES ON DISK
11493 REM
11494 REM            IMAGES SAVED AS  SCREEN.DIS
11495 REM
```

Listing 1 continued on page 140



Photo 1: *Variation of text height and color. Both text height and color can be changed under program control.*

Text continued from page 126:

Subscripts for array variables commence at 0. In consequence, if NUMBER = 25 and AXES = 1, then the BASIC statement DIM ARRAY (NUMBER, AXES) will define an array with dimensions 26 and 2.

Values of 0 or −1 are assigned to results of logical operations: 0 for false and −1 for true. This poperty is used in line 11170 of listing 1.

It is also possible to change the height and color of displayed text (as shown in photo 1); this is done occasionally within the body of the program in listing 1.

The Subroutines

Listing 1 contains the subroutines that together can be used to produce a graph on the color video-display screen. Subscripted variables, when used with a subscript of 0, refer to some horizontal component of the graph; a subscript of 1 refers to some vertical component of the graph. Certain calculation subroutines (for example, 10200 and 10300) can be accessed at a line ending in "00" to perform calculations for both the X and Y axes, or they can be accessed at the corresponding line ending in "10" to calculate for only one axis.

Some of the more important subroutines are described briefly in the paragraphs that follow:


- 7000—Review or erase images; this subroutine enables graphs stored on disk to be reviewed (displayed) or erased from the disk.
- 9000—Prepare complete graph outline; this subroutine consists of three subroutines that examine the data and draw the appropriate graph frame (see also subroutines 10200, 10300, and 10500).
- 10000—Data entry; the title of the graph, the axes' labels, and data


A 10 Megabyte Winchester hard disk based, S100 Computer for

$7500???

YOU BET!!!

We'll give you 20 to 1 (storage that is)!



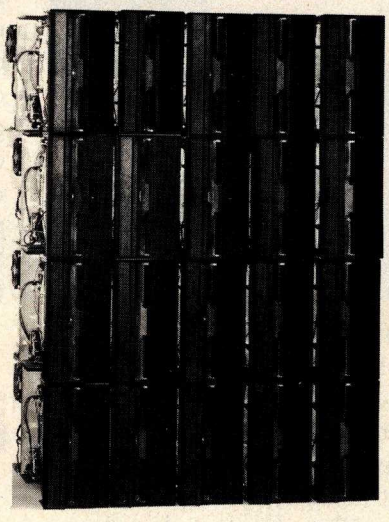

NNC Electronics 15631 Computer Lane
Huntington Beach CA 92649 (714) 893-4120

Circle 86 on inquiry card.

Circle 87 on inquiry card. →

CENTRONICS MODEL 737: Give Your Business the Advantage



Centronics' new Model 737 means you get more than ever from a printer. Outstanding print quality. Fast, quiet operation. Ready to handle text processing, word processing, or electronic mail in addition to regular small business requirements. And it meets **every** business' prime requirement: low cost.

Outstanding Print Quality

Model 737 is the first small business printer to offer correspondence quality printing. Characters with true descenders as well as underlining. Proportional spacing, the ability to justify right margins and serif typeface makes the 737 ideal for text processing applications. Standard business data processing spacing makes it available for applications ranging from letters to aged accounts receivable reports. The steel platen assures crisp, clean print impression.

Unexpected Features

Leave it to Centronics to have some surprises in the new Model 737. You get the ability to print subscripts and superscripts (particularly important for chemical or mathematical applications). The field proven 700 Series printhead technology and fewer moving parts mean reliability that you wouldn't expect in a compact, low-cost printer.

And the 737 is quiet. An optional acoustic cover makes it ideal for office environments.

Pick Your Paper

Run letterhead paper for correspondence, roll paper for general information, or fan-fold paper for standard data processing (payroll, billing, inventory, etc.). You can, with the 3-way paper handling ability of the Model 737.

The Printer of the Future . . . Today

Never before has one printer offered such high quality, reliability, and applications flexibility at such low cost. (If you don't need the correspondence quality of the 737, our Model 730 delivers 100 c.p.s. at even greater savings.)

Why Wait?

The new Model 737 is now available for delivery. For more information: call (603) 883-0111, Centronics Data Computer Corporation, Hudson, New Hampshire 03051, or any of our 15 U.S.A. or 9 international sales offices.

All Centronics products are supported by the largest worldwide service network of any independent printer company. Always use genuine Centronics ribbons and accessories.

CENTRONICS® PRINTERS
. . . the advantage

Listing 1 continued:

```
11500 PLOT 6,COLOUR(2),3,0,31,11,3,13,31:REM SAVE ON DISK
11510 INPUT "ENTER S TO SAVE, OR PRESS RETURN: ";I$:PLOT 28,11
11520 IF I$< > "S"THEN 11540
11530 PLOT 27,4:PRINT "SAVE SCREEN.DIS 6000-6FFF":PLOT 27,27
11540 RETURN
11780 REM
11781 REM
11782 REM   SELECT COLORS
11783 REM
11784 REM              COLOUR(1)   FRAME
11785 REM              COLOUR(2)   SCALE
11786 REM              COLOUR(3)   GRAPH 1
11787 REM              COLOUR(4)   GRAPH 2
11788 REM
11800 PLOT 6,4,3,0,31,11,3,16,31:REM COLOR SELECTION
11802 INPUT "ENTER C TO CHANGE COLOR: ";K$
11804 PLOT 6,COLOUR(2),3,0,31,11:IF K$< > "C"THEN RETURN
11806 PLOT 6,38,12,3,23,7,14:PRINT "COLOR SELECTION"
11810 PRINT :PRINT ,,:INPUT "TOUCH COLOR FOR BACKGROUND: ";I$
11820 I= (ASC (I$)- 16)* 8:PLOT 6,I,12,3,16,11:REM BKD
11830 PLOT 6,I/ 8* 9+ 2+ 4* (I> 40)
11840 DATA "FRAME","SCALES","GRAPH1","GRAPH2":RESTORE 11840
11850 FOR J= 1TO 4:READ I$:PLOT 3,16,9+ 2* J:PRINT "FOR ";I$;
11860 INPUT "";J$:COLOUR(J)= I+ ASC (J$)- 16
11870 PLOT 6,COLOUR(J),3,32,9+ 2* J:PRINT I$:NEXT J:RETURN
11890 REM
11891 REM
11892 REM   PAUSE
11893 REM
11894 REM              "PRESS RETURN TO CONTINUE"
11895 REM              BLINKS BRIEFLY AT BOTTOM OF GRAPH
11896 REM
11900 PLOT 6,COLOUR(1),31,3,18,31:REM PAUSE
11910 PRINT "PRESS RETURN TO CONTINUE":FOR I= 1TO 1000:NEXT I
11920 PLOT 15,3,0,31,11:INPUT "";I$:RETURN
```

Range of Values, R, to Be Plotted	Initial Value for JUMP
0.121 ≤ R < 1.21	0.4
1.21 ≤ R < 12.1	4.0
12.1 ≤ R < 121	40.0
121 ≤ R < 1210	400.0
1210 ≤ R < 12100	4000.0

Table 1: *Initial value for step size (JUMP) given the range (R) of the variable to be plotted. The table can be continued in both directions by either multiplying or dividing all the numbers in a line by 10. Once the initial value for JUMP is found, it is repeatedly divided by 2 until the step size used subdivides the range into at least four intervals—that is, until JUMP ≤ (R/4).*

are entered in this subroutine. Certain applications (eg: histograms) require only one set of data to be entered. If CHOICE=1, then the subroutine fills only ARRAY (*n*,1), that is, the data entries are placed in ARRAY (0,0), ARRAY (1,0), ARRAY (2,0), and so on. If CHOICE is not equal to 1, then this subroutine expects two sets of data to be entered, filling both ARRAY (*n*,0) and ARRAY (*n*,1). The Y-axis data is duplicated in a third column, ARRAY (*n*,2), thus allowing this data to be manipulated later without being destroyed.

- 10100—Equation plotting; this subroutine tests to see that no equation exists, then invites the user to write an equation at line 500. The equation takes the form Y= (some arithmetic expression using X). Once the equation exists, the subroutine asks for a title and the X-axis limits. The program then uses the equation to calculate twenty-five equidistant data points to fill ARRAY (*n*,1).
- 10200—Find big and little; this subroutine determines the largest and smallest values for the data and stores them in arrays BIG (*n*) and LITTLE (*n*).
- 10300—Prepare values for frame; the step size (JUMP) is calculated in accordance with the constraints described above. This value is used to determine the HIGH and LOW values for the scale. GAPS is the number of JUMPS in the length of the axis (variable SCALE).
- 10500—Draw borders with scales and titles; this subroutine draws

PLOT 2	Enter graph-plotting mode
PLOT 2, X, Y	Point at X,Y
PLOT 2, 242, X, Y	Vector to X,Y
PLOT 2, 250, X0, Y, XM	Horizontal bar at Y from X0 to XM
PLOT 2, 246, Y0, X, YM	Vertical bar at X from Y0 to YM
PLOT 3, T, L	Cursor to tab T at line L
PLOT 6, C	Defines the color of both the foreground and background
PLOT 8	Cursor to home
PLOT 9	Tab 8 spaces
PLOT 10	Line feed (move cursor down one line)
PLOT 11	Erase line
PLOT 12	Erase page
PLOT 14	Double-height text
PLOT 15	Normal-height text, with blink mode off
PLOT 16 thru PLOT 23	Changes color of foreground or background (whichever is active)
PLOT 27, 4: PRINT "[disk commands]":	
PLOT 27, 27	Execute floppy-disk command
PLOT 27, 10	Write text vertically
PLOT 27, 24	Write text horizontally
PLOT 28	Cursor up
PLOT 29	Enable background color
PLOT 31	Blink on
PLOT 255	Cancel graph-plotting mode


Table 2: *Table of plot codes in Compucolor BASIC. Many functions associated with the color video-display screen are achieved by the use of the PLOT command. The table of PLOT commands here includes all those used in listings 1 and 2.*

Circle 88 on inquiry card. →

MICROWORLD®

SPECIALS


CALL TOLL FREE: 1-800-528-1418

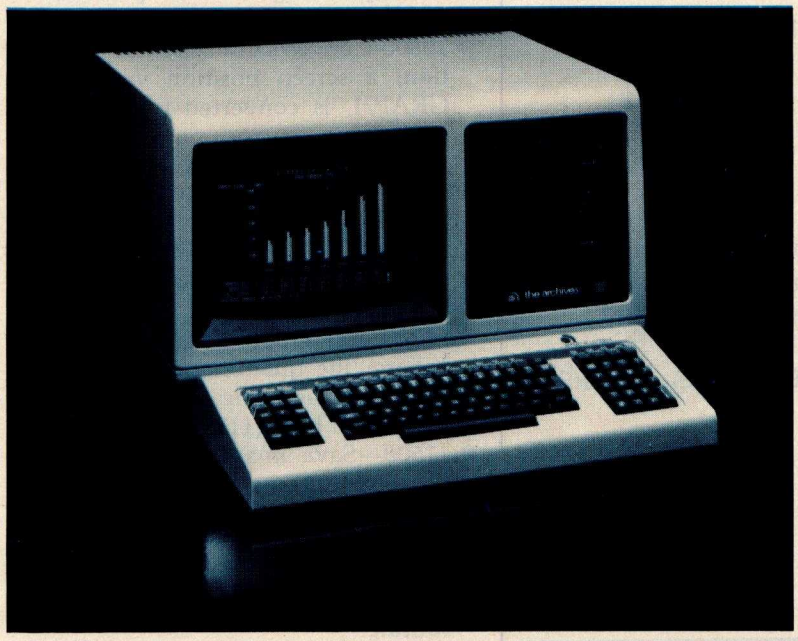

ARCHIVES
BUSINESS COMPUTER

The latest in all-in-one computers is now available from MicroWorld! The new, compact Archives Business Computer is CP/M-based, S-100 compatible, and includes 64K RAM as standard equipment. The Archives also features an amazing storage capacity . . . up to 1.5 megabytes on built-in, dual 5 1/4" drives! The detachable microprocessor-controlled keyboard includes a righthand numeric pad, lefthand function keycluster, and 23 relegendable function keys. A full 25-line by 80-character display is provided by the 12" green phosphor monitor. Screen attributes include inverse video, blink and underline in any of 8 intensities. Options for the Archives Business Computer include a direct-wire modem, hardware floating point chip, and an extensive selection of applications software!

CALL FOR PRICE!



DIABLO 630 RO

Letter-quality, up to 40 cps printer offers complete interchangeability between metal and plastic print wheels! Universal Interface, baud rates to 9600, optional forms tractor.


CALL FOR PRICE!



LEXICON LX-11

Priced lower than Novation, lower than Livermore! New Bell 103A-compatible, RS232-compatible modem has special battery-powered option!


CALL FOR PRICE!



MICROSHOPPER

New edition of the best selling computer consumer guide! Includes more than 100 photos, dozens of hardware and software product reviews . . . feature articles, glossary, and more!

$10.00 POSTAGE PAID



TELEVIDEO 920B

Your best terminal buy, loaded with features! Full-function keyboard, 24 x 80 display, blink, reverse, self-test!

CALL FOR PRICE!



ATARI 800 SYSTEM

MicroWorld now offers complete systems based around the Atari 800 Personal Computer . . . Interface Module, choice of printers, disk drives, program recorder, modem, extensive software library!

CALL FOR SPECIAL PRICE!

FREE FREIGHT

MicroWorld provides the most attractive mail-order offer in the computer industry. The nation's largest inventory, plus our own automated order processing allows us to pass on unrivaled savings! And now . . . FREE FREIGHT on any product featured on this page! We'll pay the surface freight on any computer or peripheral product in this ad. Call MicroWorld today, the source you can trust!

MICROWORLD

1425 W. 12th Place, Tempe, AZ 85281

Master Card and Visa orders welcomed!

Listing 2: *Demonstration program for the subroutines of listing 1. This short program, when added to the program in listing 1, allows the user to make a graph of a collection of points, an equation, or a series of vertical bars.*

```
5 REM KY 5 REM      GRAPHS. (C)  A. W. GROGONO.   AUG. 1979
6 REM      DEMONSTATION PROGRAM FOR USE WITH SUBROUTINES
40 RESTORE :CLEAR 200:DIM I$(12)
50 DATA 1,2,6,4:FOR I= 1TO 4:READ COLOUR(I):NEXT I
90 PLOT 29,27,24,15,14,2,255,6,1,12,3,16,3:REM CLEAR PAGE
280 REM
290 REM
300 PRINT "S E L E C T   G R A P H   T Y P E:":PRINT
310 PRINT :PRINT ,,"1.  X/Y SCATTER"
320 PRINT :PRINT ,,"2.  PLOT EQUATION"
330 PRINT :PRINT ,,"3.  Y-BAR GRAPH"
340 PRINT :PRINT ,,,:INPUT "ENTER 1 - 3: ";K:PLOT 28,11
350 IF K< 1OR K> 3THEN 340
360 IF K< > 2THEN 390
370 RESTORE :CLEAR 200:FOR I= 1TO 4:READ COLOUR(I):NEXT I
380 K= 2:DIM ARRAY(25,1):REM DIMENSIONS FOR EQUATION
390 ON KGOSUB 10000,10100,10000:REM PREPARE DATA ARRAY
400 GOSUB 9000:REM FRAME
410 ON KGOSUB 11000,11100,11200:REM SCATTER, LINE, Y-BARS
420 GOSUB 11900:REM PAUSE
430 GOSUB 11500:REM SAVE
440 GOSUB 11800:REM SELECT COLORS
450 IF K$= "C"THEN 400
460 GOTO 5
```

the borders for the graph with its scales, labels, and title. The length of each number or word is employed to ensure appropriate positioning. The value of RATIO, calculated here, is used in the subroutine at line 10700.

- 10700—Convert units to screen; a value on one of the axes (in variable PLACE) is converted to its corresponding screen position (stored in variable GRAPH).
- 10800-Converts units for text position; a screen position variable, GRAPH, is converted to its corresponding cursor position and stored in variable TEXT.
- 11000 and 11100—Plot points or lines; the data points in ARRAY are plotted as separate points (11000) or as points joined by lines (11100).
- 11200 and 11300—Plot Y-bars or X-bars; the quantities in ARRAY are plotted as vertical (11200) or as horizontal bars (11300).
- 11500—Save image on disk; this subroutine transfers the finished graph to disk for recall later.
- 11800—Select colors; the colors for the background, frame, scales, and graphs are selected with this routine.
- 11900—Pause; this subroutine causes the words "PRESS RETURN TO CONTINUE" to flash briefly beneath the graph.

A Demonstration Program

The program in listing 2 was written to demonstrate the color-graphics subroutines. Graph type 1 allows data to be entered and displayed as separate points. The program initially selects the colors shown in photo 2a, but the user can select his own colors, as shown in photo 2b.

Photos 3a and 3b illustrate the use of the equation-plotting subroutine, graph type 2. Photo 3a shows the program colors for the first range selected (−2 to +2); photo 3b shows a different set of colors selected by the user for the longer range (−4 to +4). Photo 4a shows how a variable, such as income, can be displayed as a Y-bar, as an example of graph type 3. Photos 4b and 4c show the same data using different colors selected by the user.

The brevity of listing 2 shows that minimal program writing is required to produce these graphs. In fact, if only one type of graph is required

FREE your keyboard — interact directly with the screen. Why waste time typing? Use a **3-G Light Pen.**

- In his business, Al Zenker of Zenker Dental labs in Penndel, Pennsylvania uses our pens for **data entry.** Harry Lee of Pittsfield, Massachusetts uses the pen to **select telephone numbers** to be dialed by his computer. Thorwald Esbensen of Micro-Ed, Inc. in Minneapolis, Minnesota writes **education software** for the 3-G Light Pen. Swiss Air Dispatch at Kennedy Airport in New York uses our pens to speed up its **business operations.** Dr. Richard Kerns of East Carolina University incoporates our pen in a demonstration with a voice synthesizer to **teach** his students how to use computers. In Holland, Johan Smilde uses a 3-G Light Pen to experiment with **graphics.**
- These people have discovered the benefits of using a 3-G Light Pen. Wouldn't a 3-G Light Pen make your system more versatile and more functional? Yes, of course it would!
- **Don't Wait** — order your pen today and receive:
  1) 3-G Light Pen
  2) Demonstration cassettes (with Professional TRS-80, PET and Apple)
  3) Sample program listing
  4) Complete documentation and instructions
  5) Other Light Pen software and games available.
- **NO ASSEMBLY NECESSARY. READY TO PLUG IN AND USE.**
- Complete documentation so you can write your own program in BASIC. No machine language coding necessary.
- All 3-G Professional models **plug into machine ports.** Economy model plugs into cassette and batteries are included.

Mail Coupon or Call Today for Immediate Delivery

3-G Company, Inc. Dept. BT
Rt. 3, Box 28A, Gaston, OR 97119
(503) 662-4492

Remember, 3-G offers a 30-day unconditional Money back GUARANTEE

☐ TRS-80 Economy $19.95 ☐ TRS-80 Professional $34.95 ☐ PET Professional $31.95 ☐ Apple Professional $32.95

Yes. I want to make my computer more versatile. Rush me _____ 3-G Light Pens. (Add $1.50 for mailing and handling — $6.00 foreign.)


Enclosed is: ☐ check or money order ☐ Master Charge ☐ Visa

Card No. Exp. date

NAME

ADDRESS

CITY STATE ZIP

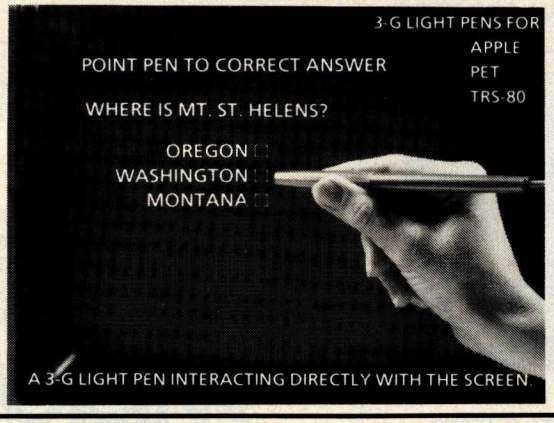

A 3-G LIGHT PEN INTERACTING DIRECTLY WITH THE SCREEN

Circle 89 on inquiry card.

THE KURTA GRAPHIC TABLET

A VERSATILE INPUT DEVICE FOR SMALL COMPUTERS

- 8½" x 11" TABLET SURFACE
- PEN
- COMPATIBILITY WITH 7" x 9" DISPLAYS
- MINIMUM INTERFACE AND SOFTWARE REQUIREMENTS

KURTA Graphic Tablets provide the small computer user with a method of enhancing his or her present setup without making a large expenditure. For example, because of the recessed tablet surface, an 8½" x 11" pad of paper fits snugly, virtually eliminating re-location problems. Hard copy is easily obtained using the pen with replaceable ball point cartridge. The KURTA Graphic Tablet is directly compatible with standard 7" x 9" display screens and since the tablets' data output directly matches the computer capabilities, the interface and software requirements are minimized. KURTA is "the new leader in graphic message input and delivery."

For more information about the KURTA Graphic Tablet see your nearest computer dealer or contact us direct.

KURTA CORPORATION
206 S. RIVER DR.
TEMPE, ARIZONA 85281
(602) 968-8709



Circle 90 on inquiry card.

(eg: points joined by lines), then the total program would be:

```
300 GOSUB 10000 : REM DATA
    ENTRY
310 GOSUB  9000 : REM FRAME
320 GOSUB 11100 : REM PLOT
    LINES
330 GOSUB 11900 : REM PAUSE
340 END
```

Of course, this assumes the presence of the subroutines given in listing 1.

In such a program and in the demonstration program, the X-axis and Y-axis graph scales are determined automatically by the program except where the user selects the X-axis limits for the equation.

Summary

The subroutines in listing 1 were written to illustrate the principles used in determining neat graph scales, and emphasis has been placed on these calculations. The frame is drawn just outside the area in which points will be graphed. This avoids the problem of graphing points that lie directly on the frame; it also avoids the possibility of the color for a nearby graph point spilling onto the frame. The program generates an even number of scale increments for each axis; this ensures uniform spacing of both tick marks and numbers. Colors are critical when the screen is being photographed; light colors on dark backgrounds show up best (this is discussed in detail in my previous article in the January 1980 BYTE).

These subroutines can be used in many graphics applications. As written, they employ two-letter names as well as the variables X, Y, I, J, K, I$, J$, and K$. This allows the user all the remaining single letters. If the user's program defines NUMBER (number of points) and fills ARRAY with the appropriate data, then the subroutines in listing 1 can be used to generate a graph. The graph will be labeled as well if the user defines the variables TITLE$, LABEL$(0), and LABEL$(1).

The photographs used to illustrate this article have been created using a Compucolor II with 16 K bytes of user memory but without the Pincushion Correction Kit. The barrel distortion on the top and bottom can be reduced by using a telephoto lens, but the pincushion effect on each side will then be worse unless the correction kit is installed.

Next month, Part 2 of this article will use the subroutines given here to construct several other kinds of graphs: a different kind of equation-plotting routine, a histogram with the equivalent Gaussian (bell-shaped) curve superimposed, linear and other kinds of regression plotting, and a monthly analysis graph of more than one variable. ■

2a *2b*

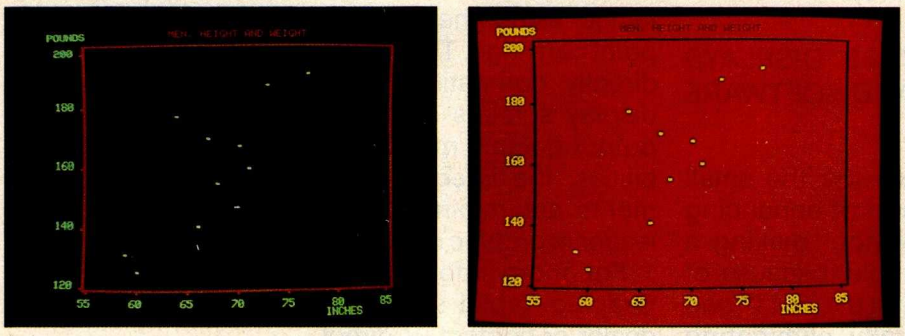


Photo 2: *Examples of point-plotting mode. The computer automatically chooses the colors of photo 2a, but the user can override this to select any other color combination, as in photo 2b. The slight "pincushion" effect can be eliminated by the addition of a corrective kit supplied by Compucolor.*

3a *3b*

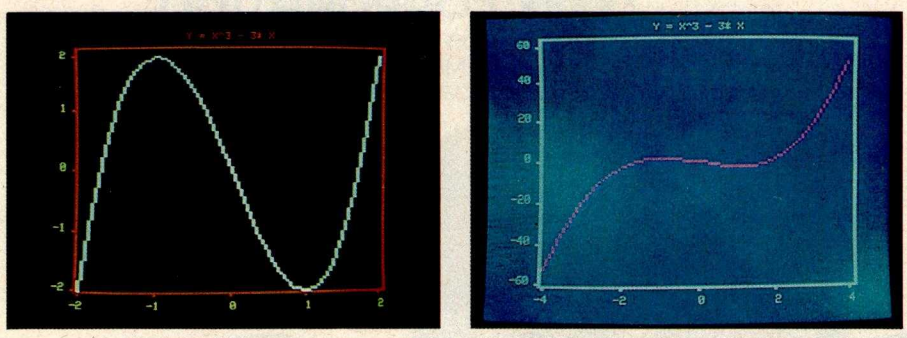


Photo 3: *Examples of equation-plotting mode. The range of both the X and Y axes can be changed, as can the choice of colors. Photo 3a illustrates the standard colors as selected by the computer; photo 3b shows another graph with colors of the user's choice.*

4a *4b* *4c*

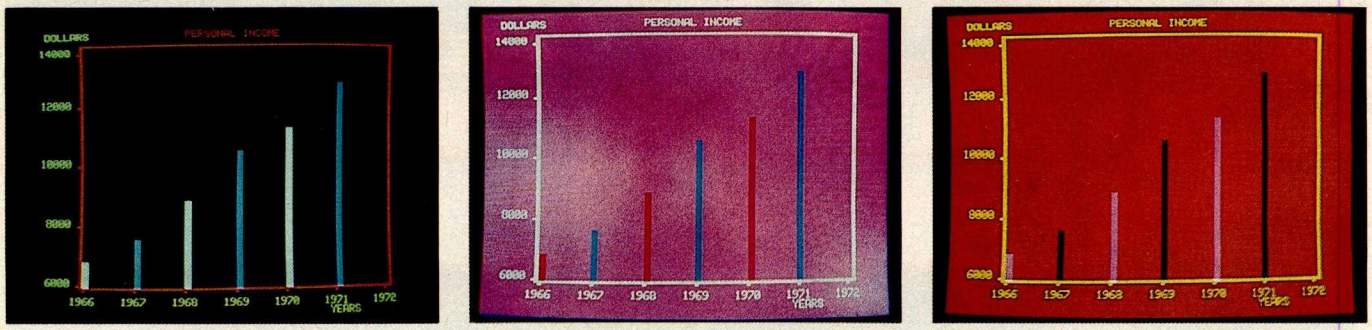


Photo 4: *Examples of bar-graph-plotting mode. Here, the same data is displayed in the standard colors (photo 4a) and two sets of user-selected colors (photos 4b and 4c). Horizontal bar graphs can also be displayed.*

Simple Base Conversions for the TRS-80

James M Curran, 24 Greendale Rd, Cedar Grove NJ 07009

I have noticed that decimal-to-hexadecimal and decimal-to-octal conversions are usually accomplished by means of subroutines, most of which require three to four statements. This is efficient enough for users of a low-level BASIC; however, computer enthusiasts with a BASIC interpreter containing the DEF FN (define function) command long for a simple one-statement conversion. Here are such conversion statements. For those of you who need to convert hexadecimal or octal to decimal, these conversions are also included. I have even thrown in a decimal-to-binary function.

Listing 1: *Definitions for five base-conversion functions. The first statement defines the function for converting decimal to binary numbers. The second and third definitions give the functions for converting from decimal to hexadecimal and from hexadecimal to decimal numbers. Notice that the variable HX$ must be initialized for both of these. The last two statements define the functions for converting from decimal to-octal and from octal to decimal numbers.*

```
1.DEF FN DB#(D)=(D AND 1)+(D AND 2)*5+(D AND 4)*25+
                (D AND 8)*125+(D AND 16)*625+
                (D AND 32)*3125+(D AND 64)*15625+
                (D AND 128)*78125


2.HX$="0123456789ABCDEF"
   DEF FN DH$(D)=MID$(HX$,(D AND -4096)/4096+1-
                (D>32767)*16,1)+
                MID$(HX$,(D AND 3840)/255+1,1)+
                MID$(HX$,(D AND 240)/16+1,1)+
                MID$(HX$,(D AND 15)+1,1)


3.HX$="0123456789ABCDEF"
   DEF FN H$D(H$)=(INSTR(HX$,MID$(H$,1,1))-1)*4096+
                  (INSTR(HX$,MID$(H$,2,1))-1)*256+
                  (INSTR(HX$,MID$(H$,3,1))-1)*16+
                  (INSTR(HX$,MID$(H$,4,1))-1)


4.DEF FN DO#(D)=(D AND 7)+(D AND 56)*1.25+
                (D AND 448)*1.5625+
                (D AND 3584)*1.953125+
                (D AND 28672)*2.44140625


5.DEF FN O$D(O$)=VAL(MID$(O$,1,1))*3276+
                 VAL(MID$(O$,2,1))*4096+
                 VAL(MID$(O$,3,1))*512+
                 VAL(MID$(O$,4,1))*64+
                 VAL(MID$(O$,5,1))*8+
                 VAL(MID$(O$,6,1))
```

These functions can also be used as subroutines by those without the DEF FN command. An AND-statement is necessary, because it performs a logical-AND operation which is used in all three routines to convert decimal to the various other bases.

The first function, which I call FNDB#, returns the binary equivalent of the argument as an eight-digit integer.

The hexadecimal equivalent of the argument is returned by the second function, FNDH$, as a four-character string with leading zeros. Arguments greater than 32767 (7FFF hexadecimal) must be signed; ie: reduced by 65536. For a 1-byte conversion, only the second half of the function is necessary.

My third function, called FNH$D, converts the argument, which must be a four-character string, into its decimal equivalent. In this function, the INSTR command is employed; if your BASIC does not have it, it is easily replaced with a BASIC subroutine. Its function is to return the position in the first string at which the second string begins. FNH$D can also be made into a 1-byte routine by using its second half. Both FNH$D and FNDH$ require HX$ to be initialized.

The final two functions for decimal-to-octal conversions (FNDO# and FNO$D) work similarly to their hexadecimal counterparts. ■

SAVE AT THE APPLE COMPUTER SUPERMARKET...
"COMPUTERS 'R' US"
UNBEATABLE MAIL ORDER DISCOUNTS
A SUBSIDIARY OF CONSUMER COMPUTERS
CHRISTMAS SUPER SALE
master charge
VISA
APPLE II PLUS
OR APPLE II STANDARD
16K FOR ONLY $925
48K FOR ONLY 1049
DISK II DRIVE W/CONTROLLER $485
PASCAL SYSTEM $425
SEE PAGE 391
FOR MORE PRODUCTS AND ORDERING INFORMATION
OFFER EXPIRES DEC. 31 1980
ORDER TOLL FREE: 1-800-854-6654
CALIFORNIA, BACKORDER OR TECHNICAL INFO: (714) 698-8088
CREDIT CARD USERS PLEASE SEE ORDERING INSTRUCTIONS ON PAGE 391

The Brains of Men and Machines


by Ernest W. Kent

When the "Brains of Men and Machines" series of articles originally appeared in BYTE magazine, the response was immediate and enthusiastic. Now Ernest W. Kent has expanded his ideas about the brain into a full-length book.

As researchers begin to unravel the mysteries of the brain's chemical, electrical, and synaptic circuitry, their findings are becoming immediately applicable to advances in robotic behavior and computer design. **The Brains of Men and Machines** "dissects" the brain to provide new insights into computer design and artificial intelligence.

It is one of the rare books that transcends disciplinary boundaries. In it the ever increasing relationship between man and machine is freshly examined — a relationship, Professor Kent concludes, that is today being reexamined in the light of man's own neurological self-image.

Hardcover 304 pages

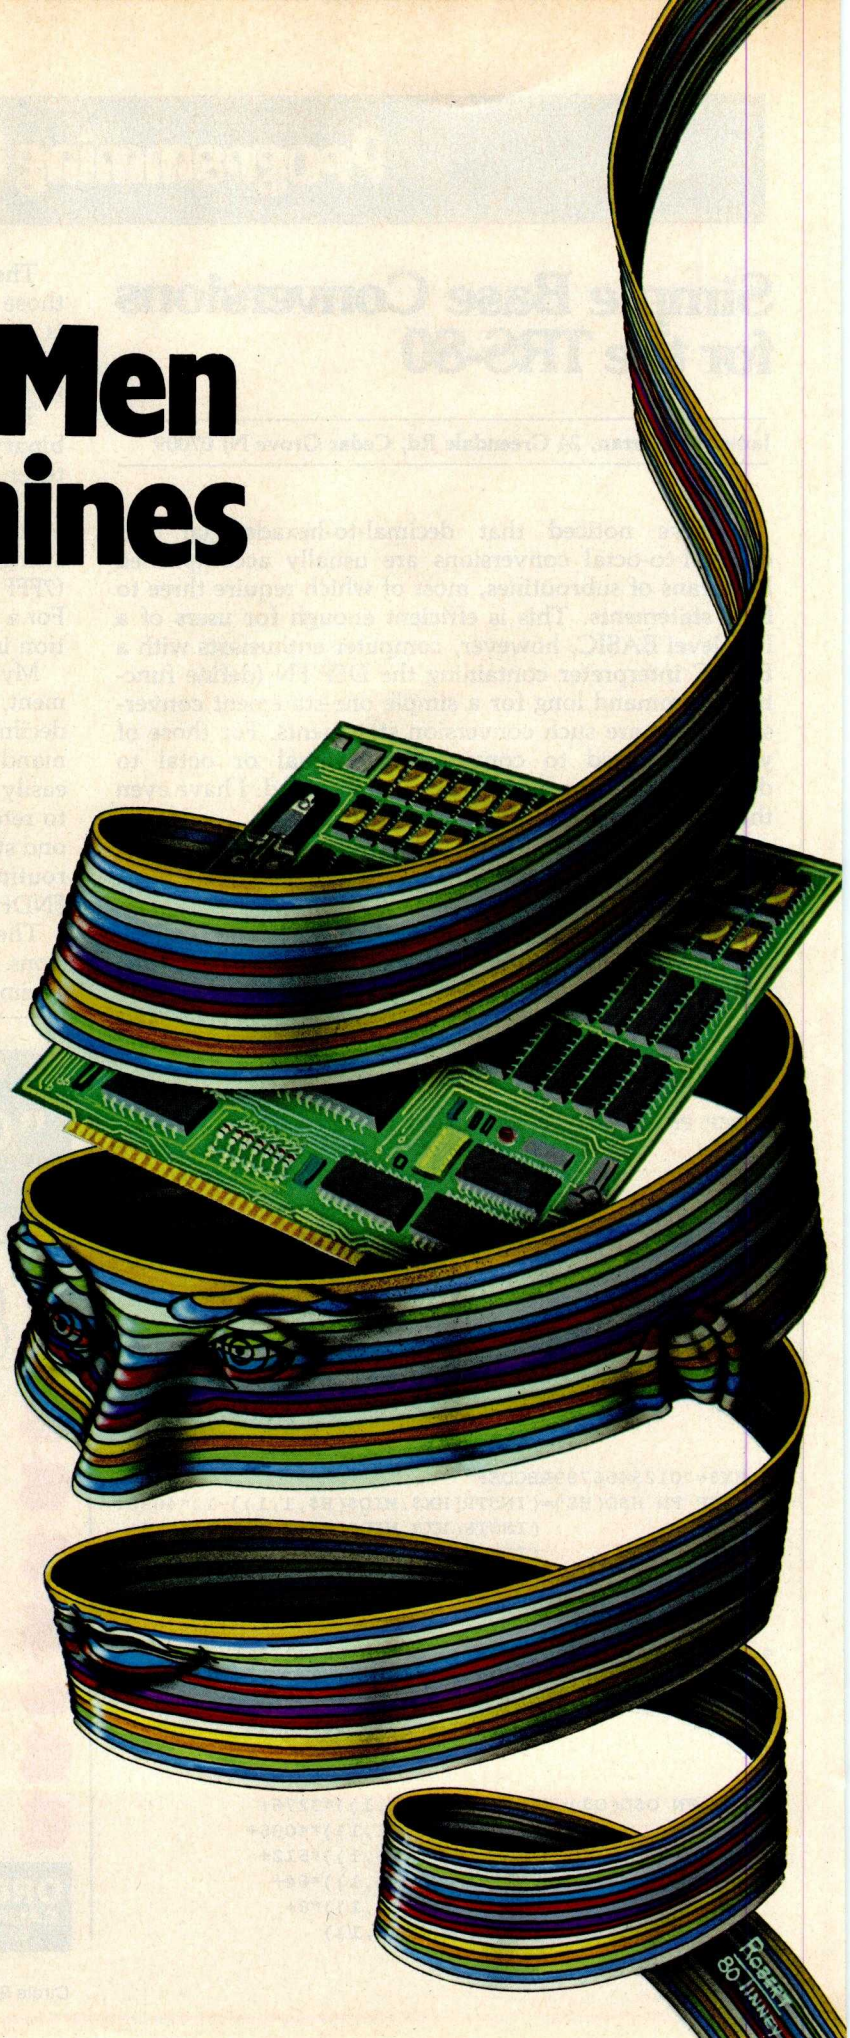

BYTE BOOKS
70 Main St.
Peterborough, NH 03458

B11

ISBN #0-07-034123-0
Price $15.95
Please remit in U.S. funds or draw on a U.S. Bank

Please send ☐ _____ copies of
The Brains of Men and Machines

Name Title Company

Street City State/Province Code

☐ Check enclosed in the amount of $_____
☐ Bill Visa ☐ Bill Master Charge
Card No._____
Exp. Date._____
Add 75¢ per book to cover postage and handling.

Available in October

BYTE Publications Inc.

Clubs and Newsletters

A Club in Augusta

The CSRA Computer Club is a group of computer hobbyists and professionals that enjoy working and playing with computers. Dues are $6 per year and everyone interested in computers is invited to attend the meetings held at 7:30 PM on the third Thursday of each month in the Student Center of the Medical College of Georgia, Laney Walker and 15th streets in Augusta, Georgia. A monthly newsletter is also published. Contact the club at CSRA Computer Club, POB 284, Augusta GA 30903.

TRS-80 Group in Manchester

The Manchester TRS-80 Users Group meets the first Sunday of each month at Raytheon Company, Island Pond Rd, in Manchester, New Hampshire. For information, contact Scott Mitchell, 346 S Taylor St, Manchester NH 03103, (603) 624-0089.

Classroom Computer News

Classroom Computer News is a bimonthly newsletter written for teachers and administrators and covers the technical and the human side of using computers in schools, as well as developments in the microcomputer industry. Each issue includes application programs, tutorials, book reviews, new product reviews, and industry news briefs. Interviews with innovators in the educational computing field, accounts of teachers' and administrators' personal experiences with microcomputers, overviews of software, and analyses of trends within the industry are covered. Subscription rates for *Classroom Computer News* are $9 per year. Contact *Classroom Computer News*, POB 299, Cambridge MA 02138, (617) 661-6164.

TI 99/4 Users Unite

There are many Texas Instruments TI 99/4 users interested in swapping information, programs, and other related items. If you are interested in starting a users group, or simply establishing contact with other users, write to Larry Morrow, 8075 Spring Garden Ct, W Chester OH 45069.

News and Trading Newsletter

The Midwest Buss is a newsletter and trading forum. The newsletter includes buy-and-sell columns and articles on hardware and software. Ads are $1 per line. A line consists of 60 characters, punctuation and spaces included. All ads should be printed or typewritten. Include phone numbers and addresses on a separate portion of the card. The deadline for submission of ads or articles is the twenty-sixth of each month. *The Midwest Buss* is mailed on the first of each month. Subscriptions are $6 per year. Contact *The Midwest Buss*, 441 E Bernhard, Hazel Park MI 48030. ■



Circle 92 on inquiry card.

Three-Dimensional Graphics for the Apple II

Dan Sokol
John Shepard
211 Fall Creek Dr
Felton CA 95018

Many articles have been written regarding three-dimensional graphics on home computers. Some involve highly complex hardware such as spinning mirrors, while others rely upon computation-intensive software to project three-dimensional objects on a two-dimensional plane.

Taking an innovative step backwards and rediscovering an old technique, I have been able to create three-dimensional pictures using my Apple II computer. I have generated a number of visually stimulating displays in this manner and would like to share with you the methods used, with the hope that you too will discover new ways to use your computer.

The method is simple. Just take a piece of cardboard, and with a pair of scissors, cut out a pair of eyeglass frames. Next, put a red filter over the left eye opening in the frame and a green filter over the right opening (I did say it was an old idea!). When viewing the screen with the glasses on, anything colored red will not be visible to your right eye, and anything green will not be visible to your left eye (you may have to adjust the tint on your television to optimize this). Anything white will be visible to both eyes.

The image that falls on the retina of your right eye will be the green image on the video monitor, but it will appear to be white! (It's all done in your brain.) The same is true of the red image in relation to your left eye. (We will refer to the red image in our software as violet. This is because the Apple HI-RES graphics cannot generate red.) [*However, see "More Colors for Your Apple," by Allen Watson III, June 1979 BYTE, page 60...*RSS]

Creating an Image

As you can see by figures 1a and 1b, an image that seems to appear in front of the screen can be made by drawing the green image to the left of the red one. An image that appears behind the screen is simulated by placing the green image to the right of the red one. The apparent depth is determined by the distance between the two colored images.

It should be mentioned that the brain requires a frame of reference to judge distance "properly." An efficient way to provide this reference is to put a white border around the screen. This will define the *neutral* plane. Naturally, any objects on this plane need be drawn only once in white.

The program in listing 1 generates a set of lines which appear to disappear into the distance.

Another simple program is presented in listing 2. This one generates a three-dimensional box.

Using the shape-generator programs provided by Apple, the user can make objects appear to be various sizes and depths. This effect can be seen by running the program in listing 3.

You can place as many objects in space as you have room for. There are, however, some guidelines.

- You should draw your images from *back* to *front*. This way any overwriting will look natural.
- As you approach the neutral plane, the two images get closer together. Any place that they are coincident should be white. This can be handled with software. (I didn't say easily.)
- Using other colors generates an unbalanced image in the neutral plane—you experiment.
- You will have to adjust your color television set to match the color of the filters that are being used. The best way to do this is to draw a small green square and a small red square on the screen. Then place a

Text continued on page 154

If you just bought another printer, boy are you gonna be sorry.



Epson.

The Epson MX-80. It's not just another worked-over rehash of last year's model. It's our top-of-the-line 80-column printer. It's new. From the ground up. And it's the most revolutionary printer to hit the market since Epson invented small printers for the 1964 Olympics in Tokyo. Don't take our word for it, though. Compare. There simply isn't a better value in an 80-column printer. Period.


But here's the fact that's going to stand the printer world on its ear. The MX-80 sports the world's first *disposable* print head. After it's printed about 50 million characters, you can throw it away. Because a new one costs less than $30, and the only tool you need to change it is attached to the end of your arm.

Now that's revolutionary, but that's only the beginning. The MX-80 also prints bidirectionally at 80 CPS with a logical seeking function to minimize print head travel time and maximize throughput. It prints 96 ASCII, 64 graphic and eight international characters in a tack-sharp 9x9 matrix. And it provides a user-defined choice of 40, 80, 66 or 132 columns and multiple type fonts.

We spent three long years developing the MX-80 as the first of a revolutionary series of Epson MX Printers. We employed the most advanced automatic assembly and machining techniques in existence to produce a printer that is incredibly versatile, remarkably reliable and extraordinarily inexpensive. It's a printer that could only come from the world's largest manufacturer of print mechanisms: Epson.

If it sounds like we're proud of the MX-80, we are. Not only does it do things some of the world's most expensive printers can't do, it'll do them for you for less than $650. That's right. Under $650.

And if that isn't revolutionary, we don't know what is.

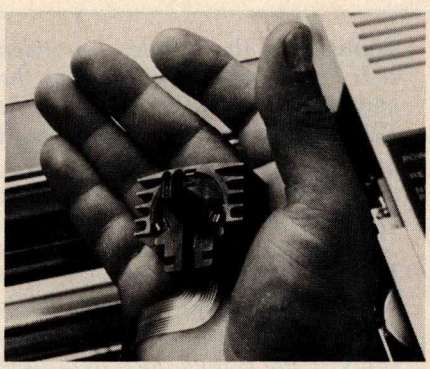

The world's first disposable print head. It has a life expectancy of over 50 million characters, yet it's so simple, you can change it with one hand. And it costs less than – repeat less than – $30.

EPSON

EPSON AMERICA, INC.

23844 Hawthorne Boulevard, Torrance, California 90505, Telephone (213) 378-2220

Listing 1: *This Apple integer BASIC program generates three-dimensional lines disappearing into infinity.*

```
  0 XO=YO=COLR=SHAPE=ROT=SCALE
  5 INIT=2048:CLEAR=2062:PLOT=2830:LINE=2836:DRAW=2871:XDRAW=2884
 10 BLACK=0:WHITE=127:VIOLET=85: LET GREEN=42
100 CALL INIT: POKE -16302,0:
150 REM   BUILD THE BORDER
200 COLR=WHITE:XO=0:YO=0: CALL PLOT:XO=279: CALL LINE:YO=191: CALL LINE:XO=0: CALL LINE:YO=0: CALL LINE
205 XO=1:YO=1: CALL PLOT:XO=278: CALL LINE:YO=190: CALL LINE:XO=1: CALL LINE:YO=1: CALL LINE
250 REM
251 REM
252 REM
500 REM  LINES TO INFINITY
510 COLR=VIOLET:XO=25:YO=180: CALL PLOT:XO=260:YO=20: CALL LINE:XO=70:YO=180: CALL LINE
520 COLR=GREEN:XO=60: CALL PLOT:XO=270:YO=20: CALL LINE:XO=10:YO=180: CALL LINE
550 END
```

Listing 2: *An Apple integer BASIC program for generating a three-dimensional box.*

```
  0 XO=YO=COLR=SHAPE=ROT=SCALE
  5 INIT=2048:CLEAR=2062:PLOT=2830:LINE=2836:DRAW=2871:XDRAW=2884
 10 BLACK=0:WHITE=127:VIOLET=85: LET GREEN=42
100 CALL INIT: POKE -16302,0:
150 REM   BUILD THE BORDER
200 COLR=WHITE:XO=0:YO=0: CALL PLOT:XO=279: CALL LINE:YO=191: CALL LINE:XO=0: CALL LINE:YO=0: CALL LINE
205 XO=1:YO=1: CALL PLOT:XO=278: CALL LINE:YO=190: CALL LINE:XO=1: CALL LINE:YO=1: CALL LINE
600 REM
601 REM
602 REM
603 REM  A BOX....
610 COLR=WHITE:XO=150:YO=50: CALL PLOT:XO=250: CALL LINE:YO=150: CALL LINE:XO=150: CALL LINE:YO=50: CALL LINE
615 COLR=GREEN:YO=75:XO=40: CALL LINE
620 XO=140: CALL LINE:XO=250:YO=50: CALL LINE
622 XO=250:YO=150: CALL PLOT
625 XO=140:YO=175: CALL LINE:XO=40: CALL LINE:XO=150:YO=150: CALL LINE:XO=40:YO=175: CALL PLOT
630 YO=75: CALL LINE:XO=140: CALL PLOT:YO=175: CALL LINE
635 XO=41:YO=75: CALL PLOT:YO=175: CALL LINE:XO=141: CALL PLOT:YO=75: CALL LINE
637 COLR=VIOLET
640 XO=30:YO=185: CALL PLOT:YO=85: CALL LINE:XO=130: CALL LINE:YO=185: CALL LINE
642 XO=250:YO=150: CALL LINE
645 XO=130:YO=185: CALL PLOT:XO=30: CALL LINE
650 XO=150:YO=150: CALL LINE:XO=30:YO=85: CALL PLOT:XO=150:YO=50: CALL LINE
660 XO=130:YO=85: CALL PLOT:XO=250:YO=50: CALL LINE
680 END
```

Listing 3: *This program uses the shape stored in the Apple II shape table and transforms it into three-dimensional form.*

```
  0 XO=YO=COLR=SHAPE=ROT=SCALE
  5 INIT=2048:CLEAR=2062:PLOT=2830:LINE=2836:DRAW=2871:XDRAW=2884
 10 BLACK=0:WHITE=127:VIOLET=85: LET GREEN=42
100 CALL INIT: POKE -16302,0:
150 REM   BUILD THE BORDER
200 COLR=WHITE:XO=0:YO=0: CALL PLOT:XO=279: CALL LINE:YO=191: CALL LINE:XO=0: CALL LINE:YO=0: CALL LINE
205 XO=1:YO=1: CALL PLOT:XO=278: CALL LINE:YO=190: CALL LINE:XO=1: CALL LINE:YO=1: CALL LINE
250 REM
700 REM
701 REM
710 REM
800 REM    3-D SQUARES
801 REM   USE SHAPE #1
802 REM  SHAPE #1 = 01 01 24 3F 3F 36 36 2D 2D 24 00
805 ROT=0:SCALE=1:SHAPE=1:XO=5:YO=5
810 FOR I=1 TO 7:SCALE=I:COLR=GREEN:XO=XO+(I*4):YO=YO+(I*4)
820 CALL XDRAW:COLR=VIOLET:XO=XO+I:YO=YO+I: CALL XDRAW: NEXT I
830 XO=XO+32:YO=90:COLR=GREEN:SCALE=SCALE+2: CALL XDRAW:COLR=VIOLET:YO=YO+8:XO=XO+8: CALL XDRAW
840 XO=XO+42:YO=YO-42:COLR=GREEN:SCALE=SCALE+2: CALL XDRAW:COLR=VIOLET:YO=YO+9:XO=XO+9: CALL XDRAW
999 END
```


Editor's Note:
Some Comments on the Programs

The three programs in this article assume that the high-resolution graphics routines have been loaded into the Apple II starting at hexadecimal location C00. The instruction LOMEM:4096 should be executed before loading the programs to protect these routines.

When I was typing these programs into the Apple, I noticed that line 10 of each listing has the statement LET GREEN = 42. At the time I could not understand why the LET keyword was used, so I deleted it. Several syntax errors later I realized the answer.

When "GREEN = 42" is parsed by the BASIC interpreter, the token GR (for graphics mode) is recognized. The rest of the line (EEN = 42) is then unrecognizable to the parser. When "LET GREEN = 42" is analyzed, the keyword LET tells the parser that the next token will be a variable. Therefore, GREEN is not broken into two tokens (GR and EEN).

This little trick could prove very useful when you wish to use a variable name which contains a keyword.

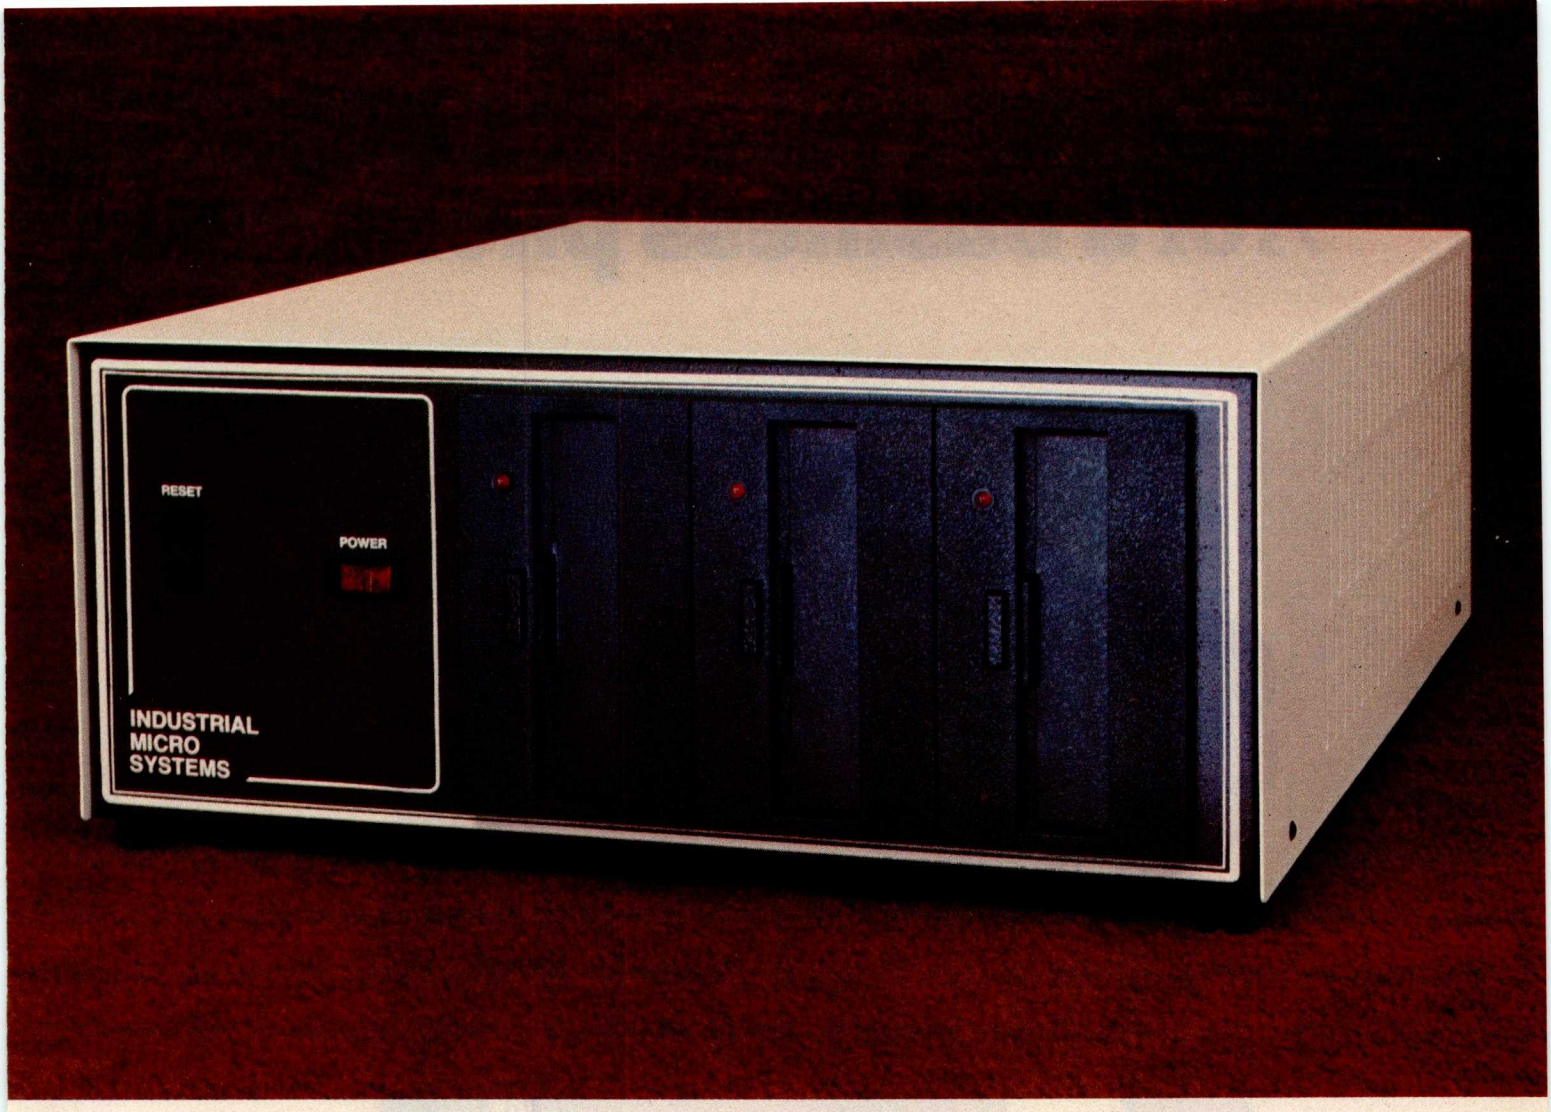

More than meets the eye.

The new Series 5000 is mighty for its size. In more than several thousand ways!

In fact, it's the first small system offering over a megabyte of integrated mini-floppy capacity. And with its super memory management, you can have better than 300k of RAM in desk or desktop versions. But hardware is just the beginning of the story.

It's the wide selection of software that really makes this system mighty.

Operating systems? Choose CP/M* with CBASIC†—the most widely accepted small computer operating system ever. Or MVT-FAMOS,** a multi-user, multi-tasking operating system with file management like the big guys, Or MICROCOBOL,†† also for multiple users, but implemented in COBOL, familiar to commercial users the world over.

And applications programs for these operating systems number in the thousands. From real estate to accounting, taxes to inventory control. they're all available at low cost—ready to run.

When you add these software and hardware features to Industrial Micro Systems' reputation for rugged, reliable quality products you'll begin to see it all. A lot more systems than your first glance reveals.

See even more at your dealer. Call us to find out the name of your nearest dealer. He'll tell you everything you need to know. And really open your eyes!

*Trademark of Digital Research Inc. **Trademark of MVT Microcomputer Systems Inc. †Trademark of Software Systems ††Product of CAP·CPP

INDUSTRIAL MICRO SYSTEMS

628 N. Eckhoff St., Orange, CA 92668, (714) 978-6966
2800 Lockheed Way, Carson City, NV 89701

Circle 94 on inquiry card. See us at Comdex '80 Nov. 18-21, 1980 Las Vegas Convention Center.

Today one dollar buys ⅓ of a business phone call.



Today one dollar buys 6¼ readers who actually see your sales message.



As your selling dollar buys less and less, it pays more and more to advertise in McGraw-Hill magazines.

As prices keep going up and up, McGraw-Hill magazines help 10.8 million decision-makers keep costs down.

For example, *Chemical Week* told chemical processing managers and professionals how exports credits could lower their debt-servicing costs. And *Engineering News-Record* showed the construction industry how to cope with the destructive effects of the 1981 federal budget.

By helping 10.8 million readers solve their inflation problems, we help you solve yours.

Today, the price of reaching one potential customer in McGraw-Hill magazines is only 16¢.[1] This compares to a cost of $6.07 for sending a business letter,[2] over $3.50 for a business phone call,[3] and an in-person sales call which, believe it or not, now costs $137.02.[4]

In times like these, when everything costs more, you may be tempted to spend less on your advertising budget. But our Laboratory of Advertising Performance (LAP) Report #5262 demonstrates that "Industrial companies that maintained or increased their advertising expenditure during the 1974-75 recession enjoyed higher sales growth than those that cut advertising." Write 1221 Avenue of the Americas, New York, N.Y. 10020 for LAP Report #5262 today. And let us help you make your advertising more efficient, as the price of all other selling tools becomes more expensive.

[1]One reader-noted impression in the average McGraw-Hill publication. [2]The Dartnell Institute of Business Research. [3]"Telephone Marketing" by Murray Roman, P. 87, McGraw-Hill 1976. [4]Laboratory of Advertising Performance Report #8013.5, McGraw-Hill Research.

McGraw-Hill Magazines

With inflation, we're an even better buy.


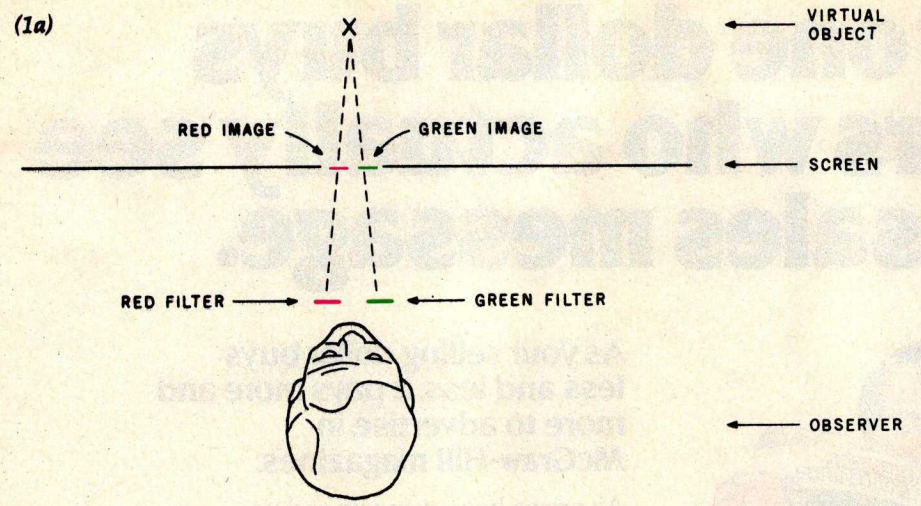


Figure 1: *A figure which appears to be behind the video screen can be produced by drawing the red image on the left side of the screen and the green image on the right side (see figure 1a). By reversing these two images, the image will appear to be in front of the video screen (see figure 1b).*

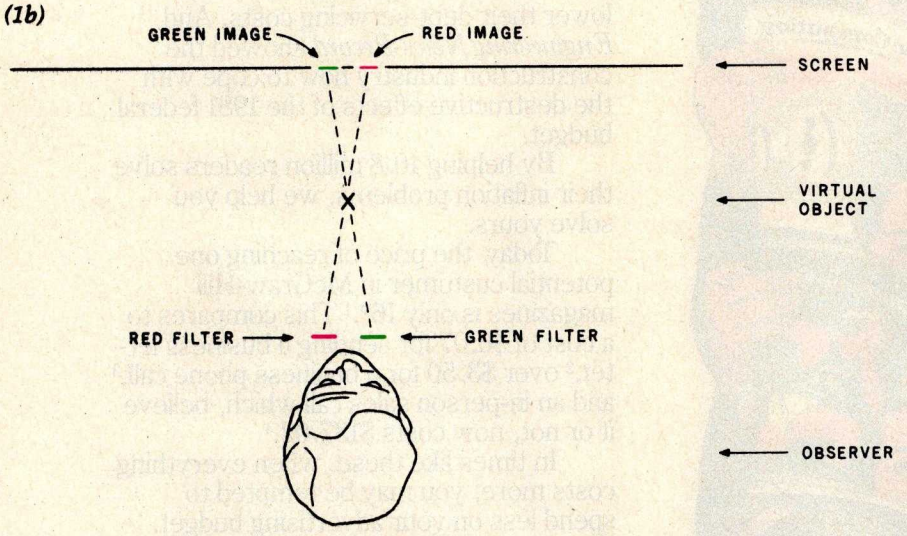

Text continued from page 148:

piece of the green filter over the red square and a piece of the red filter over the green square. Adjust the tint, chrominance (if you have one), and color knobs so that both squares disappear (as much as possible...you may have to double up the filters).

- If you aren't worried about using your color television for other entertainment, you can make the following adjustments to it. On the back of the set are three controls that are (usually) labeled red, green, and blue (or R, G, B; or red screen, blue screen, green screen). These adjust the relative intensity of the three electron guns. If you first mark the initial positions of the three controls with a pencil, you will be able to reset them when you are finished. The adjustment is simple. Turn the blue screen off! This removes all the blue dots from the screen, only red and green remain. After adjusting the television as described in the previous step, reverse the positions of the filters (red over red, green over green) and adjust the red screen so that the intensity of the two squares through the filters appears the same.
- We used colored cellophane, available at most art supply stores, for filters.

There are a number of games that can be adapted to three-dimensional displays with this technique. Have fun!■

Hazeltine Distributors:

ALABAMA: Huntsville, W. A. Brown Instruments, Inc. (205) 883-8660.

ALASKA: Anchorage, Global Communications, Inc. (907) 276-4532.

ARIZONA: Phoenix, Data Systems Marketing (602) 265-5216; Leasametric (602) 258-1225; PLS Associates, Inc. (602) 279-1531; **Tempe,** Hamilton Avnet Electronics (602) 275-7851; The Phoenix Group (602) 894-9247.

CALIFORNIA: Anaheim, Leasametric (714) 634-9525; **Burlingame,** Data Access Systems (415) 692-5711; **Carson,** Data Access Systems (213) 538-4100; Data Systems Marketing (213) 324-1151; **Costa Mesa,** Hamilton Avnet Electronics (714) 641-4100; Avnet Electronics (714) 754-6111; **Culver City,** Hamilton Avnet Electronics (213) 558-2000; Leasametric (213) 670-0461; **Foster City,** Leasametric (415) 574-4441; **Hawthorne,** Hamilton Avnet Electronics (213) 970-0956; **Hayward,** Byte Industries, Inc. (415) 783-8272; The Phoenix Group (415) 887-2851; **Irvine,** Computer Datacom, Inc. (714) 540-6327; Data Systems Marketing (714) 540-2312; **Kentfield,** American Peripheral Exchange (415) 457-0822; **Los Angeles,** David Jamison Carlyle Corp. (213) 277-4562; **Martinez,** American Peripheral Exchange (415) 229-3810; **Mountainview,** Data Systems Marketing (415) 941-0240; **Newport Beach,** David Jamison Carlyle Corp. (714) 640-0355; **Northridge,** Dayton-Forester Associates, Inc. (213) 992-8831; **Oakland,** Consolidated Data Terminals (415) 533-8125; **Orinda,** David Jamison Carlyle Corp. (415) 254-9378; **Redondo Beach,** Consolidated Data Terminal (213) 970-1030; **San Diego,** Data Systems Marketing (714) 560-9222; Electronic Marketing Specialists (714) 560-5133; Hamilton Avnet Electronics (714) 571-7510; Leasametric (714) 565-7475; **Santa Clara,** American Peripheral Exchange (408) 244-0260; **Sherman Oaks,** Electronic Marketing Specialists (213) 990-4244; **Sunnyvale,** Electronic Marketing Specialists (408) 245-9291; Hamilton Avnet Electronics (408) 743-3355; **Torrance,** The Phoenix Group, Inc. (513) 533-8134; **Tustin,** Electronic Marketing Specialists (714) 832-9920.

COLORADO: Denver, Data Systems Marketing (303) 573-5133; Leasametric (303) 429-7900; PLS Associates, Inc. (303) 773-1218; **Englewood,** Hamilton Avnet Electronics (303) 779-9998.

CONNECTICUT: West Haven, Westwood Associates (203) 932-6383; **Southbury,** J. J. Wild, Inc. (203) 264-9494.

DELAWARE: Newark, Westwood Associates (302) 454-1113.

FLORIDA: Fort Lauderdale, Hamilton Avnet Electronics (305) 971-2900; W. A. Brown Instruments, Inc. (305) 776-4800; **Melbourne,** W. A. Brown Instruments, Inc. (305) 723-0766; **Orlando,** Leasametric (305) 857-3500; W. A. Brown Instruments, Inc. (305) 425-5505; **Tallahassee,** W. A. Brown Instruments, Inc. (904) 878-6642; **Tampa,** W. A. Brown Instruments, Inc. (813) 977-0914.

GEORGIA: Atlanta, Data Access Systems (404) 449-5435; W. A. Brown Instruments, Inc. (404) 455-1035; **Lake City,** Westwood Associates (404) 961-0712; **Norcross,** Hamilton Avnet Electronics (404) 448-0800; Leasametric (404) 449-6123.

HAWAII: Honolulu, David Jamison Carlyle Corporation (808) 531-5136; **Kaneohe,** Data Systems Marketing (808) 247-0934.

ILLINOIS: Chicago, David Jamison Carlyle Corporation (312) 475-1500; **Elk Grove Village,** Leasametric (312) 595-2700; Peripheral Support Inc. (312) 593-5900; **Morton Grove,** Data Access Systems (312) 967-0440; **Schiller Park,** Hamilton Avnet Electronics (312) 678-6310.

INDIANA: Indianapolis, Hamilton Avnet Electronics (317) 844-9333; **South Bend,** General Micro Computer (219) 277-4972.

KANSAS: Lenexa, North Supply Company (913) 888-9800; Loonam Associates, Inc. (913) 888-2124; **Overland Park,** Hamilton Avnet Electronics (913) 888-8900; **Shawnee Mission,** Inland Associates, Inc. (913) 362-2366.

KENTUCKY: Jeffersontown, Loonam Associates (502) 499-8280.

LOUISIANA: Mandeville, W. A. Brown Instruments, Inc. (504) 626-9701.

MARYLAND: Baltimore, Hamilton Avnet Electronics (301) 796-5000; Westwood Associates (301) 358-7812; **Gaithersburg,** Leasametric (301) 948-9700; **Lanham,** Data Access Systems (301) 459-3377.

MASSACHUSETTS: Cambridge, Compumart Corporation (617) 491-2700; **Needham,** J. J. Wild, Inc. (617) 444-2366; **Norwood,** Data Access Systems (617) 769-6420; **Woburn,** Hamilton Avnet Electronics (617) 273-7500; Leasametric (617) 935-7780.

MICHIGAN: Ann Arbor, Compumart Corporation (313) 994-3200; **Livonia,** Hamilton Avnet Electronics (313) 522-4700; **Troy,** Data Access Systems (313) 589-1409.

MINNESOTA: Burnsville, Leasametric (612) 894-6060; **Edina,** Hamilton Avnet Electronics (612) 941-3801; **Minneapolis,** Loonam Associates (612) 831-1616.

MISSOURI: Earth City, Hamilton Avnet Electronics (314) 344-1200; **St. Louis,** Inland Associates (314) 821-3742; Loonam Associates (314) 427-7272.

NEBRASKA: Omaha, Loonam Associates (402) 333-5502.

NEW HAMPSHIRE: Merrimack, J. J. Wild, Inc. (603) 424-4717.

NEW JERSEY: Allendale, Leasametric (201) 825-9000; **Bogota,** Qytel (201) 487-7737; **Cherry Hill,** The Datastore, Inc. (609) 779-0200; Hamilton Avnet Electronics (609) 424-0100; **Cinnaminson,** Westwood Associates (609) 829-7280; **Fairfield,** Hamilton Avnet Electronics (201) 575-3390; **Matawan,** David Jamison Carlyle Corporation (201) 946-9669; **Mountain Lakes,** Data Access Systems (201) 335-3322; **Palisades Park,** Data Access Systems (201) 944-2005; **Roselle,** TSC Data Terminals (201) 245-6333; **Springfield,** Westwood Associates (201) 376-4242; **Union,** Transnet Corporation (201) 688-7800.

NEW MEXICO: Albuquerque, Data Systems Marketing (505) 294-5790; PLS Associates, Inc. (505) 255-2330.

NEW YORK: Fairport, Data Access Systems (716) 377-2080; **Great Neck,** MTI Sales Corporation (212) 896-7177; **Hollis,** Synchro-Sound Enterprises (212) 468-7067; **Latham,** J. Cameron Associates, Inc. (518) 371-5947; **Melville,** Hamilton Avnet Electronics (516) 454-6060; **New York,** Byte Shop East, Inc. (212) 889-4204; Data Access Systems (212) 564-9301; Leasametric (212) 594-6900; John D. Owens Associates, Inc. (212) 448-6283; Qytel (212) 889-3888; **Pittsford,** J. Cameron Associates, Inc. (716) 386-1681; **Plainview,** Leasametric (516) 293-5881; **Rochester,** Hamilton Avnet Electronics (716) 475-9130; **East Syracuse,** Hamilton Avnet Electronics (315) 437-2641; **Syracuse,** Leasametric (315) 455-5611.

NORTH CAROLINA: Durham, W. A. Brown Instruments, Inc. (919) 683-1580.

OHIO: Cincinnati, Interactive Information Systems (513) 761-0132; **Cleveland,** Data Access Systems (216) 473-2131; Hamilton Avnet Electronics (216) 831-3500; MTI Systems (216) 464-6688; Pro-Data Corporation (216) 229-8100; **Dayton,** Hamilton Avnet Electronics (513) 433-0610; Leasametric (513) 898-1707.

OREGON: Bend, Data Systems Marketing (503) 388-3612; **Hillsboro,** Data Systems Marketing (503) 640-4883.

PENNSYLVANIA: Aston, MLPI Newcorp Products, Inc. (215) 485-8180; **Bala Cynwyd,** Data Access Systems (215) 667-8315; **Folcroft,** Leasametric (215) 583-2000; **Huntingdon Valley,** Marketline Systems, Inc. (215) 947-6670.

SOUTH CAROLINA: Columbia, W. A. Brown Instruments, Inc. (803) 798-8070.

TENNESSEE: Oak Ridge, W. A. Brown Instruments, Inc. (615) 482-5761.

TEXAS: Austin, Hamilton Avnet Electronics (512) 837-8911; **Dallas,** Leasametric (214) 661-9193; **Houston,** CMC Marketing Corporation (713) 995-4960; Data Access Systems (713) 682-5965; Hamilton Avnet Electronics (713) 780-1771; Leasametric (713) 977-5990; **Irving,** Data Access Systems (214) 256-5536; Hamilton Avnet Electronics (214) 661-8204.

UTAH: Salt Lake City, Data Systems Marketing (801) 487-8281; Hamilton Avnet Electronics (801) 972-2800; PLS Associates, Inc. (801) 466-8729.

VIRGINIA: Newport News, Atlantic Communications (804) 380-8498; **Sterling,** Comsel Corporation (703) 525-5889; **Vienna,** Comsel Corporation (703) 938-5264.

WASHINGTON: Bellevue, Hamilton Avnet Electronics (206) 643-3950; **Bothell,** Data Systems Marketing (206) 487-3571; **Redmond,** Consolidated Data Terminals (206) 883-0100; Leasametric (206) 883-6510; **Tukwila,** Data Access Systems (206) 251-5070.

WISCONSIN: Milwaukee, Hamilton Avnet Electronics (414) 784-4510; Peripheral Support, Inc. (414) 774-1000; **Waukesha,** Loonam Associates (414) 548-9790.

Smart shopping

Your Hazeltine distributor has all the terminals you need.



You can save time by taking all your TTY terminal needs to one source—your local Hazeltine distributor. Right in your neighborhood, your distributor offers the same quality, the same service and the same comprehensive warranty program that you would get by contacting Hazeltine directly.

The Hazeltine distributor can give you easy access to a broad selection of Hazeltine products, including the economical Hazeltine 1400/1500 series of conversational and editing terminals, the high performance Modular One family, and—soon—the new Hazeltine Executive 80™ line of sophisticated smart terminals. An experienced sales professional, your local distributor is ready to provide full product and application support.

Most important, each of our authorized distributors has Hazeltine's full support. You will find that Hazeltine's entire field and factory organization supports the distributor when you need delivery, warranty service, or even just the answer to a question.

Be a smart shopper. Call your nearest Hazeltine distributor—part of our winning team for the eighties.

Hazeltine Corporation,
Computer Terminal Equipment,
Greenlawn, NY 11740.
(516) 549-8800 Telex: 96-1435

Hazeltine and the Pursuit of Excellence

Hazeltine **Answers for the Eighties** 80

Circle 95 on inquiry card.

No. 17

Software with full support

Purchasing our software is just the beginning. We then back it up with professional support:

■ Subscription to "LIFELINES" for automatic notifications of revisions! ■ Update service for software and documentation! ■ Telephone Hotline! ■ Overseas software export service!

All Lifeboat programs require CP/M, unless otherwise stated.

Genuine CP/M for Apple II Available now!

Software with Manual / Manual Alone

☐ **CP/M* FLOPPY DISK OPERATING SYSTEM**—Digital Research's operating system configured for many popular micro-computers and disk systems:

System	Version	Price
New→ Apple II*	2.x	349/25 ◇
SoftCard* with Z80 Microsoft BASIC version 5 with high resolution graphics		
North Star Single Density	2.x	170/25
North Star Double/Quad	2.x	170/25
Durango F-85	2.x	170/25
iCOM Micro-Disk 2411	1.4	145/25
iCOM 3712 for MITS 88-2SIO Console	1.4	170/25 *
iCOM 3712 for 3P+S/MITS SIO Rev non-zero console	1.4	170/25 *
iCOM 3812	1.4	170/25 *
Mits 3202/Altair 8800	1.4	145/25
Heath H8 + H17	1.4	145/25 Ⓜ
Heath H89	1.4	145/25 Ⓜ
Heath H89 by Magnolia	2.x	300/25 ◇
Ohio Scientific C3	2.x	200/25
Onyx C8001 Standard	2.x	250/25
Onyx C8001 Enhanced	2.x	330/25
TRS-80 Model I	1.4	145/25 Ⓜ
TRS-80 Model II	2.x	170/25
TRS-80 Model II + Corvus	2.x	250/25
Processor Technology Helios II	1.4	145/25
Intel MDS Single Density	2.x	170/25
Intel MDS Double Density	2.x	170/25
Micropolis Mod I	2.x	200/25 Ⓥ
Micropolis Mod II	2.x	200/25 Ⓥ
Mostek MDX STD Bus System	2.x	350/25 **
The following configurations are scheduled for release soon:		
North Star Double/Quad + Corvus	2.x	250/25
Ohio Scientific C3-C	2.x	250/25
iCOM 3812	2.x	225/25 *
iCOM 4511/Pertec D3000	2.x	375/25 * +

*Software consists of the operating system, text editor, assembler, debugger and other utilities for file management and system maintenance. Complete set of Digital Research's documentation and additional implementation notes included. Systems marked * and ** include firmware on 2708 and 2716. Systems marked + include 5440 media charge. Systems marked Ⓜ require the special Ⓜ versions of software in this catalog. ◇ includes hardware addition to allow our standard versions of software to run under it.*

☐ **Z80 DEVELOPMENT PACKAGE**—Consists Ⓜ of: (1) disk file line editor, with global inter and ② intra-line facilities; (2) Z80 relocating assembler, Zilog/Mostek mnemonics, conditional assembly and cross reference table capabilities; (3) linking loader producing absolute Intel hex file ..... **$95/$20**

☐ **ZDT**—Z80 Monitor Debugger to break and Ⓜ examine registers with standard Zilog/ ② Mostek mnemonic disassembly displays. $35 when ordered with Z80 Development Package ..... **$50/$10**

AVOCET SYSTEMS

☐ **XASM-68**—Non-macro cross-assembler with nested conditionals and full range of pseudo operations. Assembles from standard Motorola MC6800 mnemonics to Intel hex ... **$200/$25**

☐ **XASM-65**—As XASM-68 for MOS Technology MCS-6500 series mnemonics ..... **$200/$25**

☐ **XASM-48**—As XASM-68 for Intel MCS-48 and UPI-41 families ..... **$200/$25**

☐ **XASM-18**—As XASM-68 for RCA 1802 ..... **$200/$25**

☐ **DISTEL**—Disk based disassembler to Intel 8080 or TDL/Xitan Z80 source code, listing and cross reference files, Intel or TDL/Xitan pseudo ops optional. Runs on 8080 ..... **$65/$10**

Software with Manual / Manual Alone

☐ **DISILOG**—As DISTEL to Zilog/Mostek Ⓜ mnemonic files ..... **$65/$10** ②

☐ **SMAL/80** Structured Macro Assembler Ⓧ Language—Package of powerful general purpose text macro processor and SMAL structured language compiler. SMAL is an assembler language with IF-THEN-ELSE, LOOP-REPEAT-WHILE, DO-END, BEGIN-END constructs ..... **$75/$15**

PHOENIX SOFTWARE ASSOCIATES

☐ **PASM***—Z80 macro assembler, Intel/TDL ② mnemonics. Generates Intel hex format or relocatable code in either TDL Object Module format or PSA Relocatable Binary Module format. Supports text insertion, conditional branching within macros, recursive macro calls and parameter passing. ..... **$129/$25**

☐ **EDIT**—Character oriented text file editor. In- ② cludes macro definition capabilities. Handles insertion, deletion, searching, block move, etc. for files of any length. Does not require a CRT. ..... **$129/$25**

☐ **PLINK***—Two pass **disk-to-disk linkage edi-** ② **tor/loader** which can produce re-entrant, ROMable code. Can link programs that are larger than available memory for execution targeted on another machine. Full library capabilities. Input can be PSA Relocatable Binary Module, TDL Object Module or **Microsoft REL files**. Output can be a COM file, Intel hex file, TDL Object Module or PSA Relocatable file. ..... **$129/$25**

☐ **BUG* and μBUG***—Z80 interactive machine ② level debugging tools for program development. BUG has full symbolic trace and interactive assembly (mnemonics compatible with PASM). Dynamic breakpoints and conditional traps while tracing (even through ROM!). μBUG is a subset of BUG and is used in memory limited situations ..... **$129/$25**

DIGITAL RESEARCH

☐ **MP/M**—Installed for single density MDS-800. Multi-processing derivative of the CP/M operating system. Manual includes CP/M2 documentation ..... **$300/$50**

☐ **MAC**—8080 Macro assembler. Full Intel macro Ⓢ definitions. Pseudo Ops include RPC, IRP, REPT, TITLE, PAGE, and MACLIB. Produces absolute hex output plus symbol table file for use by SID and ZSID (see below) .. **$120/$15**

☐ **SID**—8080 Symbolic debugger. Full trace, Ⓢ pass count and breakpoint program testing. Has backtrace and histogram utilities. When used with MAC, provides full symbolic display of memory labels and equated values .**$105/$15**

☐ **ZSID**—Z80 Symbolic debugger with all fea- Ⓢ tures of SID ..... **$130/$15** ②

☐ **TEX**—Text output formatter to create paginat- Ⓢ ed, page-numbered and justified copy. Output can be directed to printer or disk ... **$105/$15**

☐ **DESPOOL**—Utility program to permit simulta- Ⓢ neous printing from text files while executing other programs ..... **$80/$10**

☐ **tiny C**—Interactive interpretive system for Ⓧ teaching structured programming techniques. Manual includes full source listings .**$105/$50**

☐ **BDS C COMPILER**—Supports structures, Ⓜ unions, 2 dimensional arrays, pointers, recur- ① sion and overlays. Features optimized code generator, variable sized buffers for file I/O, and capability to produce ROMable code. Includes macro package to enable user to produce linkable modules with MAC (see under Digital Research). Floating point functions, full run-time package and machine code library sources provided. Linker, library manager and textbook included. Compiler lacks initializers, statics, floats and longs. ..... **$145/$25**

New Version

Software with Manual / Manual Alone

☐ **WHITESMITHS C COMPILER**—The ultimate Ⓛ in systems software tools. Produces faster Ⓧ code than a pseudo-code Pascal with more extensive facilities. Conforms to the full UNIX* Version 7 C language, described by Kernighan and Ritchie, and makes available over 75 functions for performing I/O, string manipulation and storage allocation. Linkable to Microsoft REL files. Requires 60K CP/M ..... **$630/$30**

MICROSOFT

☐ **BASIC-80**—Disk Extended BASIC, ANSI Ⓛ compatible with long variable names, Ⓜ WHILE/WEND, chaining, variable length file records. MBASIC version 4.51 also included on disk. ..... **$325/$25**

☐ **BASIC COMPILER**—Language compatible Ⓛ with BASIC-80 and 3-10 times faster execution. Ⓜ Produces standard Microsoft relocatable binary output. Includes MACRO-80. Also linkable to FORTRAN-80 or COBOL-80 code modules ..... **$350/$25**

☐ **FORTRAN-80**—ANSI 66 (except for COM- Ⓛ PLEX) plus many extensions. Includes relocat- Ⓜ able object compiler, linking loader, library with manager. Also includes MACRO-80 (see below) ..... **$425/$25**

☐ **COBOL-80**—Level 1 ANSI '74 standard plus Ⓛ most of Level 2. Full sequential, relative, and Ⓜ indexed file support with variable file names. New→ Powerful interactive, formatted screen handling with ACCEPT and DISPLAY verbs. Program segmentation for execution of programs larger than memory and CHAIN command with parameter passing. Full support of CP/M version 2 files. Includes MACRO-80 (see above), linking loader, and relocatable library manager. Requires 48K CP/M ..... **$700/$25**

☐ **MACRO-80**—8080/Z80 Macro Assembler. Ⓛ Intel and Zilog mnemonics supported. Relocat- Ⓜ able linkable output. Loader, Library Manager and Cross Reference List utilities included ..... **$149/$15**

☐ **XMACRO-86**—8086 cross assembler. All Ⓛ Macro and utility features of MACRO-80 package. Mnemonics slightly modified from Intel ASM86. Compatibility data sheet available ..... **$275/$25**

☐ **EDIT-80**—Very fast random access text editor Ⓛ for text with or without line numbers. Global and intra-line commands supported. File compare utility included. ..... **$89/$15**

☐ **PASCAL/M***—Compiles enhanced Standard Ⓧ Pascal to compressed efficient Pcode. Totally CP/M compatible. Random access files. Both 16 and 32-bit Integers. Runtime error recovery. Convenient STRINGs. OTHERWISE clause on CASE. Comprehensive manual (90 pp. indexed). SEGMENT provides overlay structure. INPORT, OUTPORT and untyped files for arbitrary I/O. Requires 56K CP/M. Specify 1) 8080 CP/M, 2) Z80 CP/M, or 3) Cromemco CDOS. ..... **$175/$20**

☐ **PASCAL/Z**—Z80 native code PASCAL com- ① piler. Produces optimized, ROMable re-entrant ② code. All interfacing to CP/M is through the support library. The package includes compiler, relocating assembler and linker, and source for all library modules. Variant records, strings and direct I/O are supported. Requires 56K CP/M ..... **$395/$25**

☐ **PASCAL/MT**—Subset of standard PASCAL. Ⓜ Generates ROMable 8080 machine code. Ⓧ Symbolic debugger included. Supports interrupt procedures, CP/M file I/O and assembly language interface. Real variables can be BCD, software floating point, or AMD 9511 hardware floating point. Includes strings enumerations and record data types. Manual explains BASIC-PASCAL conversion. Requires 32K .**$250/$30**

☐ **APL/V80**—Concise and powerful language for ② application software development. Complex programming problems are reduced to simple expressions in APL. Features include up to 27K active workspace, shared variables, arrays of up to 8 dimensions, disk workspace and copy object library. The system also supports auxiliary processors for interfacing I/O ports. Requires 48K CP/M and serial APL printing terminal or CRT ..... **$500/$30**

☐ **ALGOL-60**—Powerful block-structured lan- ② guage compiler featuring economical run-time Ⓜ dynamic allocation of memory. Very compact (24K total RAM) system implementing almost all Algol 60 report features plus many powerful extensions including string handling direct disk address I/O etc. ..... **$199/$20**

☐ **CBASIC-2** Disk Extended BASIC—Non- Ⓜ interactive BASIC with pseudo-code compiler and run-time interpreter. Supports full file control, chaining, integer and extended precision variables, etc. Versions of CRUN for CP/M versions 1.4 and 2.x included on disk. .**$120/$15**

MICRO FOCUS

☐ **STANDARD CIS COBOL**—ANSI '74 COBOL Ⓛ standard compiler fully validated by U.S. Navy tests to ANSI level 1. Supports many features to level 2 including dynamic loading of COBOL modules and a full ISAM file facility. Also, program segmentation, interactive debug and powerful interactive extensions to support protected and unprotected CRT screen formatting from COBOL programs used with any dumb terminal ..... **$850/$50**

☐ **FORMS 2**—CRT screen editor. Output is Ⓛ COBOL data descriptions for copying into CIS COBOL programs. Automatically creates a query and update program of indexed files using CRT protected and unprotected screen formats. No programming experience needed. Output program directly compiled by STANDARD CIS COBOL ..... **$200/$20**

Software with Manual / Manual Alone

☐ **NEVADA COBOL**—Subset of ANSI-74. Fea- Ⓜ tures fast compilation and execution with small object modules. Has extended arithmetic with 18 digit accuracy. Extended I/O includes random access files and sequential files of both fixed and variable length records, and interactive accept/display verbs. Good error messages and debugging facilities enhance program development. Requires a 32K CP/M system ..... **$149/$25**

New→

EIDOS SYSTEMS

☐ **KBASIC**—Microsoft Disk Extended BASIC Ⓛ version 4.51 integrated with KISS Multi-Keyed Index Sequential and Direct Access file management as 9 additional BASIC commands. KISS included as relocatable modules linkable to FORTRAN-80, COBOL-80, and BASIC COMPILER. Specify CP/M version 1.4 or 2.x when ordering. Requires 48K CP/M **$585/$45**
To licensed users of Microsoft BASIC-80 (MBASIC) ..... **$435/$45**

☐ **XYBASIC** Interactive Process Control BASIC—Full disk BASIC features plus unique commands to handle byte rotate and shift and to test and set bits. Available in several versions:

Integer ROM squared	$350/$25
Integer CP/M	$350/$25
Extended ROM squared	$450/$25
Extended CP/M	$450/$25
Extended Disk CP/M	$550/$25
Integer CP/M Run Time Compiler	$350/$25
Extended CP/M Run Time Compiler	$450/$25

☐ **RECLAIM**—A utility to validate media under CP/M. Program tests a diskette or hard disk surface for errors, reserving the imperfections in invisible files, and permitting continued usage of the remainder. Essential for any hard disk. Requires CP/M version 2. ..... **$80/$5**

☐ **BASIC UTILITY DISK**—Consists of: (1) Ⓜ CRUNCH-14— Compacting utility to reduce the size and increase the speed of programs in Microsoft BASIC 4.51, BASIC-80 and TRS-80 BASIC. (2) DPFUN—Double precision subroutines for computing nineteen transcendental functions including square root, natural log, log base 10, sine, arc sine, hyperbolic sine, hyperbolic arc sine, etc. Furnished in source on diskette and documentation ..... **$50/$35**

☐ **STRING/80**—Character string handling plus routines for direct CP/M BDOS calls from FORTRAN and other compatible Microsoft languages. The utility library contains routines that enable programs to chain to a COM file, retrieve command line parameters and search file directories with full wild card facilities. Supplied as linkable modules in Microsoft format. **$95/$20**

☐ **STRING/80** source code available separately— **$295/NA**

☐ **THE STRING BIT**—FORTRAN character Ⓜ string handling. Routines to find, fill, pack, move, separate, concatenate and compare character strings. This package completely eliminates the problems associated with character string handling in FORTRAN. Supplied with source ..... **$65/$15**

☐ **VSORT**—Versatile sort/merge system for fixed Ⓜ length records with fixed or variable length fields. VSORT can be used as a stand-alone package or loaded and called as a subroutine from CBASIC-2. When used as a subroutine, VSORT maximizes the use of buffer space by saving the TPA on disk and restoring it on completion of sorting. Records may be up to 255 bytes long with a maximum of 5 fields. Upper/lower case translation and numeric fields supported. ..... **$175/$20**

☐ **CPM/374X**—Has full range of functions to create or re-name an IBM 3741 volume, display directory information and edit the data set contents. Provides full file transfer facilities between 3741 volume data sets and CP/M files ..... **$195/$10**

Coming Soon

CPAids*

☐ **MASTER TAX**—Professional tax preparation Ⓛ program. Prepares schedules A, B, C, D, E, F, † G, R/RP, SE, TC, ES and forms 2106, 2119, 2210, 3468, 3903, 2441, 4625, 4726, 4797, 4972, 5695 and 6251. Printing can be on readily available, pre-printed continuous forms, on overlays, or on computer generated, IRS approved forms. Maintains client history files and is interactive with CPAids GENERAL LEDGER II (see below) ..... **$995/$30**
Annual Update Fee **$350**

☐ **STANDARD TAX**—As above for schedules A, † B, C, D, E, G, R/RP, SE, TC and forms 2106 and 2441. Also, does not maintain client history files ..... **$495/$30**
Annual Update Fee **$175**

☐ **GENERAL LEDGER II**—Designed for CPA's. † Stores complete 12 month detailed history of transactions. Generates financial statements, depreciation, loan amortizations, journals, trial balances, statements of changes in financial position, and compilation letters. Includes payroll system with automatic posting to general ledger. Prints payroll register, W2's and payroll checks. ..... **$450/$30**

Copyright © 1980 Lifeboat Associates. No portion of this advertisement may be reproduced without prior permission.

Lifeboat Associates, 1651 Third Avenue, N.Y., N.Y. 10028 **(212) 860-0300** Telex:220501

Neu in der Schweiz Lifeboat Associates GmbH, Aegeristr. 35, 6340 Baar **Telefon 042/31 2931**

Software with Manual / Manual Alone

New → **T/MAKER**—Powerful new tool for preparing management reports with tabular data. Makes financial modeling projects easy. Do you want a weekly profitability report? Set up the table and compute. Just change the sales figures for next week and compute. You have a new report! T/MAKER includes a full screen editor for setting up tables which pages left, right, up and down. Compute includes standard arithmetic, percents, exponents, common transcendental functions, averages, maxima, minima, projections, etc. Requires 48K CP/M, CBASIC-2, CRT Terminal with addressable cursor positioning. . . . . **$275/$25**

BSTAM—Utility to link one computer to another Ⓜ also equipped with BSTAM. Allows file transfers at full data speed (no conversion to hex), with CRC block control check for very reliable error detection and automatic retry. We use it! It's great! Full wildcard expansion to send ★.COM, etc. 9600 baud with wire. 300 baud with phone connection. **Both** ends need one. Standard and Ⓜ versions can talk to one another. This software requires a knowledge of assembler language for installation. . . . . **$150/$10**

BSTMS—Intelligent terminal program for Ⓜ CP/M systems. Permits communication between micros and mainframes. Sends character data files to remote computers under complete control. System can record character data sent from remote computer systems and data banks. Includes programs to EXPAND and COMPRESS binary files for transmission. This software requires a knowledge of assembler language for installation. . . . . **$200/$25**

WHATSIT?*—Interactive data-base system using associative tags to retrieve information by subject. Hashing and random access used for fast response. Requires CBASIC-2 . **$175/$25**

SELECTOR III-C2—Data Base Processor to † create and maintain multi-key data bases. Ⓜ Prints formatted sorted reports with numerical summaries or mailing labels. Comes with sample applications, including Sales Activity, Inventory, Payables, Receivables, Check Register, and Client/Patient Appointments, etc. Requires CBASIC-2. Supplied in source . . . . **$295/$20**

GLECTOR—General Ledger option to SELECTOR III-C2. Interactive system provides for customized COA. Unique chart of transaction types insure proper double entry bookkeeping. Generates balance sheets, P&L statements and journals. Two year record allows for statement of changes in financial position report. Supplied in source. Requires SELECTOR III-C2. CBASIC-2 and 56K system. . . . . **$350/$25**

DMA

CBS—Configurable Business System is a † comprehensive set of programs for defining custom data files and application systems without using a programming language such as BASIC, FORTRAN, etc. Multiple key fields for each data file are supported. Set-up program customizes system to user's CRT and printer. Provides fast and easy interactive data entry and retrieval **with transaction processing**. Report generator program does complex calculations with stored and derived data, record selection with multiple criteria, and custom formats. Sample inventory and mailing list systems included. **No support language required** . . . . **$395/$40**

MICROPRO

SUPER-SORT I—Sort, merge, extract utility as Ⓛ absolute executable program or linkable module in Microsoft format. Sorts fixed or variable records with data in binary, BCD, Packed Decimal, EBCDIC, ASCII, floating & fixed point, exponential, field justified, etc. Even variable number of fields per record! . . . . **$225/$25**

SUPER-SORT II—Above available as abso-Ⓛ lute program only . . . . **$175/$25**

SUPER-SORT III—As II without SELECT/ Ⓛ EXCLUDE . . . . **$125/$25**

DATASTAR—Professional forms control entry Ⓛ and display system for key-to-disk data capture. Menu driven with built-in learning aids. Input field verification by length, mask, attribute (i.e. upper case, lower case, numeric, auto-dup, etc.). Built-in arithmetic capabilities using keyed data, constant and derived values. Visual feedback for ease of forms design. Files compatible with CP/M-MP/M supported languages. Requires 32K CP/M . . . . **$350/$35**

WORD-STAR—Menu driven visual word pro-Ⓛ cessing system for use with standard terminals. Text formatting performed on screen. Facilities for text paginate, page number, justify, center and underscore. User can print one document while simultaneously editing a second. Edit facilities include global search and replace, Read/Write to other text files, block move, etc. Requires CRT terminal with addressable cursor positioning . . . . **$445/$40**

WORD-STAR-MAIL-MERGE—As above with Ⓛ option for production mailing of personalized documents with mail lists from DATASTAR or NAD . . . . **$575/$40**

WORD-MASTER Text Editor—In one mode Ⓛ has superset of CP/M's ED commands including global searching and replacing, forwards and backwards in file in video mode, provides full screen editor for users with serial addressable-cursor terminal . . . . **$145/$25**

Software with Manual / Manual Alone

New → **MAGIC WAND***—Word processing system with simple, easy to use full screen text editor and powerful print processor. Editor has all standard editing functions including text insert and delete, global search and replace, block move and library files for boiler plate text. Print processor formatting commands include automatic margins, pagination, headings & footings, centered and justified text. Also prints with true proportional spacing, merges with data files for automatic form letters, and performs run-time conditional testing for varied output. Requires 32K CP/M and CRT terminal with addressable cursor. . . . . **$395/$40**

TEXTWRITER III—Text formatter to justify and Ⓜ paginate letters and other documents. Special features include insertion of text during execution from other disk files or console, permitting recipe documents to be created from linked fragments on other files. Has facilities for sorted index, table of contents and footnote insertions. Ideal for contracts, manuals, etc. Now compatible with Electric Pencil* and Word-Star prepared files . . . . **$125/$20**

New → **DATEBOOK**—Program to manage time just like an office appointment book but using the speed and memory of a computer. Keeps track of three appointment schedules (three dental chairs, three attorneys, etc.) at once. Appointments consist of name, reason for the appointment, the date and time, and the length of the appointment. System can be quickly customized for the individual user. Many helpful features for making, changing, finding, and reporting appointments. Requires 48K CP/M and 180K bytes diskette storage. Not available for Apple CP/M. . . . . **$295/$25**

New lower prices for application Software

PEACHTREE SOFTWARE*

General accounting software for small busi-Ⓛ nesses. Each product can be used alone or with † automatic posting to the general ledger. Supplied in source for Microsoft BASIC 4.51.

GENERAL LEDGER	**$530/$40**
ACCOUNTS PAYABLE	**$530/$40**
ACCOUNTS RECEIVABLE	**$530/$40**
PAYROLL	**$530/$40**
INVENTORY	**$660/$40**

Other application products supplied in source Ⓛ for Microsoft BASIC 4.51.

† MAILING ADDRESS	**$530/$40**
PROPERTY MANAGEMENT	**$925/$40**

GRAHAM-DORIAN SOFTWARE SYSTEMS

Comprehensive accounting software written in Ⓛ CBASIC-2 and supplied in source code. Each Ⓜ software package can be used as a stand-† alone system or integrated with the General Ledger for automatic posting to ledger accounts. Requires CBASIC-2.

GENERAL LEDGER	**$805/$40**
ACCOUNTS PAYABLE	**$805/$40**
ACCOUNTS RECEIVABLE	**$805/$40**
INVENTORY SYSTEM	**$555/$40**
JOB COSTING	**$805/$40**
APARTMENT MANAGEMENT	**$805/$40**
CASH REGISTER	**$805/$40**

POSTMASTER—A comprehensive package Ⓜ for mail list maintenance that is completely menu driven. Features include keyed record extraction and label production. A form letter program is included which provides neat letters on single sheet or continuous forms. Includes NAD file translator. Requires CBASIC-2. . . . . **$150/$20**

STRUCTURED SYSTEMS GROUP

Complete interactive accounting software for † business. Each product can be used stand-alone or with automatic posting to the general ledger. Each product is thoroughly tested and very well documented. Each product requires CBASIC-2.

GENERAL LEDGER	**$820/$40**
ACCOUNTS RECEIVABLE	**$820/$40**
ACCOUNTS PAYABLE	**$820/$40**
PAYROLL	**$820/$40**
INVENTORY CONTROL	**$820/$40**

LIFELINES
NEWSLETTER FROM LIFEBOAT

LIFELINES is the first step in software support for the serious microcomputer user. Each issue reports new revisions together with information on the purpose for each such release, be it for correction of "bugs" or the addition of features and facilities.

Feature Articles ! New Software ! Product Comparisons ! Info on CP/M Users Group !

SUBSCRIPTION INFORMATION:

$18 for twelve issues: U.S., Canada, and Mexico.

$40 for twelve issues: all other countries.

$2.50 for each back issue: U.S., Canada, and Mexico.

$3.60 for each back issue: all other countries.

Send Check to LIFELINES, 1651 Third Avenue, New York, N.Y. 10028 or use your VISA or MASTERCARD—call (212) 722-1700

Software with Manual / Manual Alone

ANALYST—Customized data entry and report-† ing system. User specifies up to 75 data items per record. Interactive data entry, retrieval, and update facility makes information management easy. Sophisticated report generator provides customized reports using selected records with multiple level breakpoints for summarization. Requires a disk sort utility such as QSORT, SUPER-SORT or VSORT and CBASIC-2 . . . . **$250/$15**

LETTERIGHT—Program to create, edit and type letters or other documents. Has facilities to enter, display, delete and move text, with good video screen presentation. Designed to integrate with NAD for form letter mailings. Requires CBASIC-2 . . . . **$200/$25**

NAD Name and Address selection system—Interactive mail list creation and maintenance program with output as full reports with reference data or restricted information for mail labels. Transfer system for extraction and transfer of selected records to create new files. Requires CBASIC-2 . . . . **$100/$20**

QSORT—Fast sort/merge program for files with fixed record length, variable field length information. Up to five ascending or descending keys. Full back-up of input files created . . . . **$100/$20**

★ ★ ★ ★ ★ ★ ★

CONDIMENTS

★ ★ ★ ★ ★ ★ ★

HEAD CLEANING DISKETTE—Cleans the drive Read/Write head in 30 seconds. Diskette absorbs loose oxide particles, fingerprints, and other foreign particles that might hinder the performance of the drive head. Lasts at least 3 months with daily use. Specify 5" or 8".

Single sided	**$20 each/$55 for 3**
Double sided	**$25 each/$65 for 3**

DC 300 Data Cartridges Specify 450' XL or 300' certified. Pack of 5. . . . . **$100**

FLIPPY DISK KIT—Template and instructions to modify single sided 5¼" diskettes for use of second side in single sided drives **$12.50**

FLOPPY SAVER—Protection for center holes for 5" and 8" floppy disks. Only 1 needed per diskette. Kit contains centering post, pressure tool and tough 7 mil mylar reinforcing rings for 25 diskettes.

5" Kit	**$14.95**
5" Rings only	**$7.95**
8" Kit	**$16.95**
8" Rings only	**$8.95**

PASCAL USER MANUAL AND REPORT—By Jensen and Wirth. The standard textbook on the language. Recommended for use by Pascal/Z, Pascal/M and Pascal/MT users **$12**

THE C PROGRAMMING LANGUAGE—By Kernighan and Ritchie. The standard textbook on the language. Recommended for use by BDS C, tiny C, and Whitesmiths C users . . **$12**

STRUCTURED MICROPROCESSOR PROGRAMMING—By the authors of SMAL/80. Covers structured programming, the 8080/8085 instruction set and the SMAL/80 language **$20**

ACCOUNTS PAYABLE & ACCOUNTS RECEIVABLE—CBASIC—By Osborne/McGraw-Hill **$20**

GENERAL LEDGER—CBASIC—By Osborne/McGraw-Hill **$20**

PAYROLL WITH COST ACCOUNTING—CBASIC—by Osborne/McGraw-Hill **$20**

★ ★ ★ ★ ★ ★ ★

Hearty Appetite.

★ ★ ★ ★ ★ ★ ★

*CP/M and MP/M are trademarks of Digital Research.
Z80 is a trademark of Zilog, Inc.
UNIX is a trademark of Bell Laboratories.
WHATSIT? is a trademark of Computer Headware.
Electric Pencil is a trademark of Michael Shrayer Software.
TRS-80 is a trademark of Tandy Corp.
Pascal/M is a trademark of Sorcim.
SoftCard is a trademark of Microsoft.
Apple is a trademark of Apple Computer.
PASM, PLINK, BUG and μBUG are trademarks of Phoenix Software Associates Ltd.
CPAids is a trademark of Computer Tax Service, Inc.
MAGIC WAND is a trademark of Small Business Application, Inc.
Peachtree Software is a trademark of Retail Sciences, Inc.

† Recommended system configuration consists of 48K CP/M, 2 full size disk drives, 24 x 80 CRT and 132 column printer.

Ⓜ Modified version available for use with CP/M as implemented on Heath and TRS-80 Model I computers.

Ⓛ User license agreement for this product must be signed and returned to Lifeboat Associates before shipment may be made.

Ⓘ This product Includes/eXcludes the language Ⓧ manual recommended in Condiments.

Ⓢ Serial number of CP/M system must be supplied with orders.

② Requires Z80 CPU.

Ordering Information

MEDIA FORMAT ORDERING CODES
When ordering, please specify format code.

LIFEBOAT ASSOCIATES MEDIA FORMATS LIST. Diskette, cartridge disk and cartridge tape format codes to be specified when ordering software for listed computer or disk systems. All software products have specific requirements in terms of hardware or software support, such as MPU type, memory size, support operating system or language.

Computer system	Format Code
Altair 8800 Disk	See MITS 3200
Altos	A1*
Apple + SoftCard 13 Sector	RG
Apple + SoftCard 16 Sector	RR
AVL Eagle	RB
BASF System 7100	RD
Blackhawk Single Density	Q3
Blackhawk Micropolis Mod II	Q2
CDS Versatile 3B	Q1
CDS Versatile 4	Q2
COMPAL-80	Q2
Cromemco System 3	A1*
Cromemco Z2D	R6
CSSN BACKUP (tape)	T1 #
Delta	A1*
Digi-Log Microterm II	RD
Digital Microsystems	A1*
Discus	See Morrow Discus
Durango F-85	RL
Dynabyte DB8/2	R1
Dynabyte DB8/4	A1*
Exidy Sorcerer + Lifeboat CP/M	Q2
Exidy Sorcerer + Exidy CP/M	Q4
Heath H8 + H17/H27	P4
Heath H89 + Lifeboat CP/M	P4
Heath H89 + Magnolia CP/M	P7
Helios II	See Processor Technology
Horizon	See North Star
iCOM 2411 Micro Floppy	R3
iCOM 3712	A1
iCOM 3812	A1*
iCOM 4511 5440 Cartridge CP/M 1.4	D1 #
iCOM 4511 5440 Cartridge CP/M 2.2	D2 #
IMS 5000	RA
IMS 8000	A1*
IMSAI VDP-40	R4**
IMSAI VDP-42	R4**
IMSAI VDP-44	R5**
IMSAI VDP-80	A1**
Intecolor	See ISC Intecolor
Intel MDS Single Density	A2
Intel MDS Double Density	A5
Intertec SuperBrain DOS 0.1	R7
Intertec SuperBrain DOS 0.5-2.X	RJ
Intertec SuperBrain DOS 3.X	RK
ISC Intecolor 8063/8360/8963	A1
Kontron PSI-80	RF
Meca 5¼"	P6
Micromation (Except TRS-80 below)	A1*
Micropolis Mod I	Q1
Micropolis Mod II	Q2
MITS 3200/3202	B1
Morrow Discus	A1*
Mostek	A1
MSD 5¼"	RC
North Star Single Density	P1
North Star Double/Quad	P2
Nylac Single Density	Q3
Nylac Micropolis Mod. II	Q2
Ohio Scientific C3	A3
Onyx C8001	T2 #
Pertec PCC 2000	A1*
Processor Technology Helios II	B2
Quay 500	RO
Quay 520	RP
RAIR Single Density	R9
RAIR Double Density	RE
Research Machines 8"	A1
Research Machines 5¼"	RH
REX	Q3
Sanco 7000 5¼"	RQ
SD Systems 8"	A1*
SD Systems 5¼"	R3
Sorcerer	See Exidy Sorcerer
Spacebyte	A1
SuperBrain	See Intertec
Tarbell	A1*
TEI 5¼"	R3
TEI 8"	A1*
Thinkertoys	See Morrow Discus
TRS-80 Model I 5¼"	R2
TRS-80 Model I + FEC Freedom	RN
TRS-80 Model I + Micromation	A4*
TRS-80 Model I + Omikron 5¼"	RM
TRS-80 Model I + Omikron 8"	A1
TRS-80 Model I + Shuffleboard 8"	A1
TRS-80 Model II	A1*
VDP-40/42/44/80	See IMSAI
Vector Graphic	Q2
Vector MZ	Q2
Versatile	See CDS Versatile
Vista V80 5¼" Single Density	P5
Vista V200 5¼" Double Density	P6
Zenith Z89 + Lifeboat CP/M	P4
Zenith Z89 + Magnolia CP/M	P7

Prices reflect distribution on 8" single density diskettes. If a format is requested which requires additional diskettes, a surcharge of $8. per additional diskette will be added.

Prices F.O.B. New York. Shipping, handling and C.O.D. charges extra.

Manual cost applicable against price of subsequent software purchase.

The sale of each proprietary software package conveys a license for use on one system only.

VISA MasterCard

* Single-Side Single-Density disks are supplied for use with Double-Density and Double-Side 8" soft sector format systems.

** IMSAI formats are single density with directory offset of zero.

\# A media surcharge of $25 for orders on tape formats T1 and T2 and of $100 for orders on disk formats D1 and D2 will be added.

The list of available formats is subject to change without notice. In case of uncertainty, call to confirm the format code for any particular equipment.



Lifeboat Associates
1651 Third Avenue, N.Y., N.Y. 10028
(212) 860-0300

The Altos ACS8000 Single-Board Computer

Mark Dahmke
1515 Superior St, Apt 15
Lincoln NE 68521

Altos Computer Systems of San Jose, California, manufactures a series of powerful Z80-based computers aimed mainly at the small-business and scientific-laboratory markets. The company offers a wide variety of models — from one 8-inch, single-density, Shugart floppy-disk drive with 32 K bytes of main memory to four double-density, 8-inch floppy-disk drives, and a hard-disk subsystem with as much as 58 megabytes of on-line storage.

Hardware Design

The ACS8000 series are all single-circuit-card computers based on a Z80A microprocessor running at 4 MHz. All systems come with at least 32 K bytes of 4116 dynamic memory devices. This is expandable to 64 K bytes on two versions of the ACS8000, and to 208 K bytes on the third version.

The system also comes with a 2708 EPROM (erasable programmable read-only memory) that contains the ALTOS-E monitor program. The 2708 is active until CP/M is boot-loaded: it is then disabled and disappears so the entire memory-address space is available as programmable memory. This technique is widely used and is referred to as "phantom read-only memory."

About the Author

Mark Dahmke is a a consulting editor for BYTE Publications and also operates a computer consulting business. He has been involved with computers since 1974 and does a great deal of systems hardware and software design. His interests include writing, photography, voice synthesis, and computer graphics.

Serial Ports

Even the smallest Altos system comes with a dual-channel, serial I/O (input/output) device. One channel is used for the system console, and the other is set up to drive a printer or another device, such as a modem. The console channel is preset by the ALTOS-E monitor firmware to 9600 bps, with 1 start bit, 1 stop bit, 8 data bits, and no parity. It runs in full-duplex (ie: simultaneous-bidirectional) mode. The 9600 bps data rate of the console is not alterable, but the printer characteristics can be changed after the system is booted up.

Parallel Ports

All Altos computers come with at least two user-defined parallel ports. There are actually two Z80 PIO (parallel input/output) devices, each with two ports, but one is used to control disk operations. The user-definable ports are accessible through an external connector that may be connected to a printer, an EPROM programmer, or a parallel-input keyboard. Both ports are fully programmable.

The Counter-Timer Circuit

The Z80 CTC (counter-timer circuit) is a programmable counter-timer that has four independent channels. Three of the channels (addresses 0 thru 2) are used by the system to set console and printer data rates and disk-head load-delay times. The fourth channel is available to the user and can be programmed as an interval timer or real-time clock.

The Floppy-Disk Controller


The Altos single-density model uses the Western Digital 1771-1

A Visit to Altos

Altos computers have acquired quite a reputation for reliability — it's the sort of thing you hear by word-of-mouth in this industry. To find out more, I paid a visit to Altos recently at the invitation of Dr Roger Vass, the Vice-President of Marketing.

Roger described the extensive quality-control procedures used at Altos, which include several burn-in tests of individual components and complete systems in its testing ovens. Another reason for the low failure rate of the computers (eg: less than 1% are returned to the plant because of defects) is that Altos computers use a single printed-circuit board for the entire computer, thus eliminating many potential interconnection problems.

*Interestingly, Altos sells more computers (ie: about 55% at present) overseas than it does domestically, due in part to the company's vigorous marketing activity in Europe. Roger sees the European market as having great potential for American personal-computer companies. Certainly, the growth of the number of publications and public interest at overseas trade shows confirms this. . .***CM**

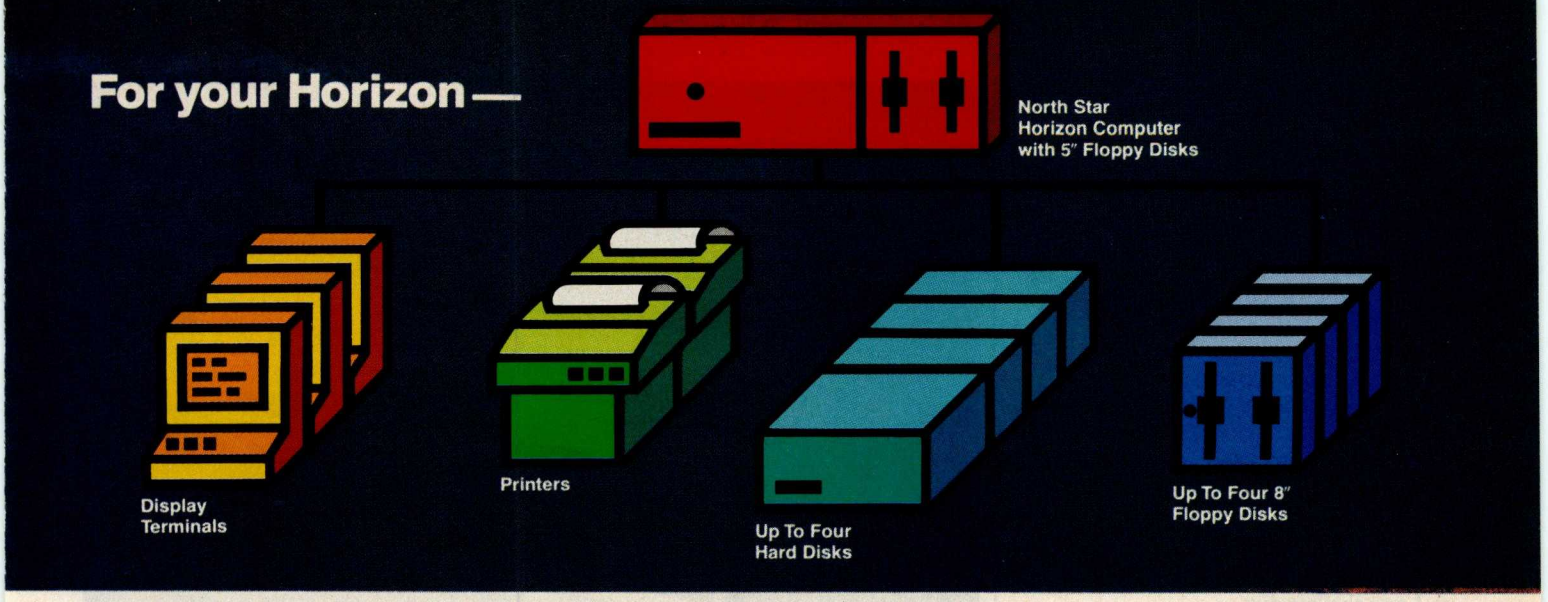

More power, work, flexibility!

JOEDOS™ — Jointly Operate Everything Disk Operating System. Switch from North Star™ BASIC to CP/M™ and back again with a simple command. Floating point and standard 8, 10, 12, and 14 digit precisions of North Star BASIC, as well as Digital Research's CP/M all on the same hard disk unit.

Designed to operate with the DISCUS M26™ 26.5 megabyte (formatted) Winchester-technology hard disk unit and North Star's Micro Disk System, JOEDOS brings you large mainframe performance at microcomputer cost and reliability. CP/M disk activity is amazingly quick through JOEDOS; access to North Star BASIC programs and files is unbelievable!

Speed and enormous storage capacity (as much as 106 megabytes) are only the beginning. Through JOEDOS, each hard disk unit may appear to be one drive or many different "drives" (as many as 147 double density 180K North Star 5¼" drive-size segments). As many as seven of these segmented "drives" may be addressed at any particular time. Segment size, file size and directory size are variable according to user's requirements. Maximum file size is 16 megabytes, while the maximum directory size for each segment is 8,160 entries.

JOEDOS — Micro Mike's hard disk operating system. Requires DISCUS M26 hard disk unit and controller and North Star Micro Disk System for operation. Includes CP/M.
JOEDOS and manual **$495**

JOESHARE™ — North Star Horizon™/DISCUS Hard Disk Timesharing System. Micro Mike's popular interrupt-driven, bank switching timesharing for North Star Horizon computer is now available with all the features of JOEDOS hard disk operating system. JOESHARE allows multiple users to access as many as four 26.5 megabyte hard disk units, simultaneously operating programs through North Star DOS or through CP/M.

JOESHARE — Micro Mike's North Star Horizon timesharing/DISCUS hard disk operating system. Requires North Star Horizon and DISCUS M26 hard disk unit for operation. Includes CP/M.
JOESHARE and manual **$750**

HDSHARE™ — North Star Horizon/North Star Hard Disk Timesharing System. A version of JOESHARE with all of the features of JOEDOS using the North Star hard disk. HDSHARE allows multiple users to access as many as four 18 megabyte North Star hard disk units, simultaneously operating programs through North Star DOS or through CP/M.

HDSHARE — Micro Mike's North Star Horizon timesharing/North Star hard disk operating system. Requires North Star Horizon and North Star hard disk system for operation. Includes CP/M.
HDSHARE and manual **$750**

5.2SHARE™ — North Star Horizon/Floppy Disk Timesharing System. Micro Mike's floppy disk timesharing system has some new enhancements. 5.2SHARE now supports 8, 10, 12, and 14 digit floating point and standard North Star BASIC with as many as four DISCUS 8" drives, operating in conjunction with the Horizon's 5¼" drives to provide in excess of 5 megabytes of external storage.

5.2SHARE — Micro Mike's interrupt-driven, bank switching timesharing for the North Star Horizon computer. Includes 8" drive software interface. For double density or quad capacity systems only.
5.2SHARE and manual **$395**

DOSCHG™ — Micro Mike's 8" drive interface to North Star DOS and BASIC. Requires North Star Micro Disk System and DISCUS 8" drives and controller for operation.
DOSCHG and manual **$150**

Program operation manuals are available for preview before software purchase.
Program Operation Manuals for each program **$25**
(Applies toward purchase of program)

Programs are available in double density/quad capacity format only. Prices are subject to change without notice.

Contact your North Star dealer or Micro Mike's.
Send $1 for descriptive literature.

JOEDOS, JOESHARE, HDSHARE, 5.2SHARE and DOSCHG are registered trademarks of Micro Mike's, Incorporated
North Star and Horizon are registered trademarks of North Star Computers, Inc.
DISCUS and M26 are registered trademarks of Morrow Designs, Inc.
CP/M is a registered trademark of Digital Research, Inc.
Copyright 1980 Micro Mike's, Inc. All rights reserved worldwide.

Micro Mike's, Inc.
905 South Buchanan Amarillo, Texas 79101 USA Telephone: 806/372-3633
making technology uncomplicated . . . for People

Circle 96 on inquiry card.

Could you pass this Red Cross swimming test?

SWIM:

1. Breaststroke—100 Yds.
2. Sidestroke—100 Yds.
3. Crawl stroke—100 Yds.
4. Back crawl—50 Yds.
5. On back (legs only)—50 Yds.
6. Turns (on front, back, side).
7. Surface dive—underwater swim—20 Ft.
8. Disrobe—float with clothes—5 mins.
9. Long shallow dive.
10. Running front dive.
11. 10-minute swim.

Anybody who's taken a Red Cross swim course knows how tough it can be.


There's a good reason.

We believe drowning is a serious business.

Last year alone, we taught 2,589,203 Americans not to drown—in the seven different swim courses we offer all across the country. (Incidentally, most of the teaching—as with almost everything American Red Cross does—is done by dedicated volunteers.)

A good many of the youngsters not only are learning to keep *themselves* safe. Thousands upon thousands of them are learning to become lifesavers.

And the life they save—it just might be your own.

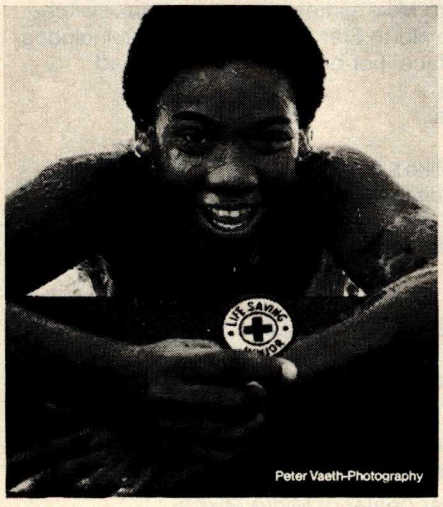

Red Cross is counting on you.



Photo 1: *Front view of the Altos ACS 8000-2 computer, which has 64 K bytes of memory and two dual-density, single-sided disk drives.*

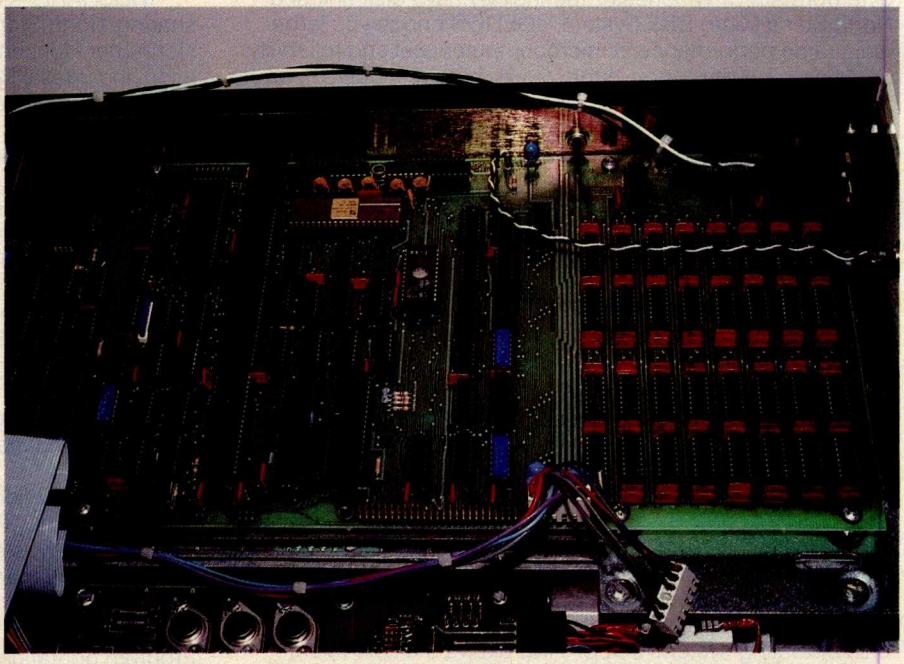


Photo 2: *Interior view of the ACS 8000-2, which is, as are all the Altos models, a single-board, Z80-based computer.*

floppy-disk controller/formatter device to manage up to four 8-inch drives. The 1771-1 is directly integrated into the single-board design of the Altos.

The double-density version requires some additional control circuitry and uses the 1791-1 device; thus the board supporting double-density disks is slightly larger. All versions of the ACS8000 are available with either single-sided or double-sided Shugart drives.

All boards have a fifty-pin expansion connector that allows the user to access all Z80 address, data, and con-

Circle 97 on inquiry card. ➔



When DecisionMaster™ speaks everybody listens.

Let's face it. We all have to make decisions. Decisions that can change our lives. Decisions that can make us happy or unhappy. Decisions that could win us fame or fortune. Now, DecisionMaster can help you make the best decisions of your life.

Use Bayesian theory to peer into the future...even if you've never heard of the Bayes' Rule. Do a complete weighted factor analysis...without knowing what one is. Use discounted cash flow to compare investment alternatives without bothering with present value tables. These and other sophisticated theories that were once the exclusive domain of professors and top business executives are *built into* DecisionMaster's algorithms... so you can use them at the touch of a key!

DecisionMaster is easy to use. It features:

- A fully documented manual developed by an authority in the field.
- A unique program-controlled cross reference system.
- A powerful formatted-screen data entry system.

You'll use DecisionMaster in hundreds of routine decisions, as well as more important ones such as • Buying a house • Changing jobs • Selecting investment • Evaluating insurance policies • Expanding product lines • Leasing vs. purchasing.

If you buy only one computer program this year, make it DecisionMaster. And when it speaks, *listen*.

DECISION?MASTER™

To order, see your software dealer or return this form with your check to: DecisionMaster, Dept. B4, 10428 Westpark, Houston, Texas 77042 Add $1.50 for shipping and handling

Diskette for: ☐ Apple II* (32K) $29.95 ☐ TRS-80** (Level II-32K) $29.95 ☐ TRS-80** (Model II) $39.95

Name

Address

City State Zip

CHARGE by phone toll-free: **1-800-231-5768 Ext. 306**
(In Texas: 1-800-392-2348) or return this form:


☐ VISA ☐ MasterCard Bank Code

Account No.

Signature Expiration Date

*Apple II is a registered trademark of Apple Computers, Inc.
**TRS-80 is a trademark of the Radio Shack Division of Tandy Corp.

NOW YOU'RE TALKING!

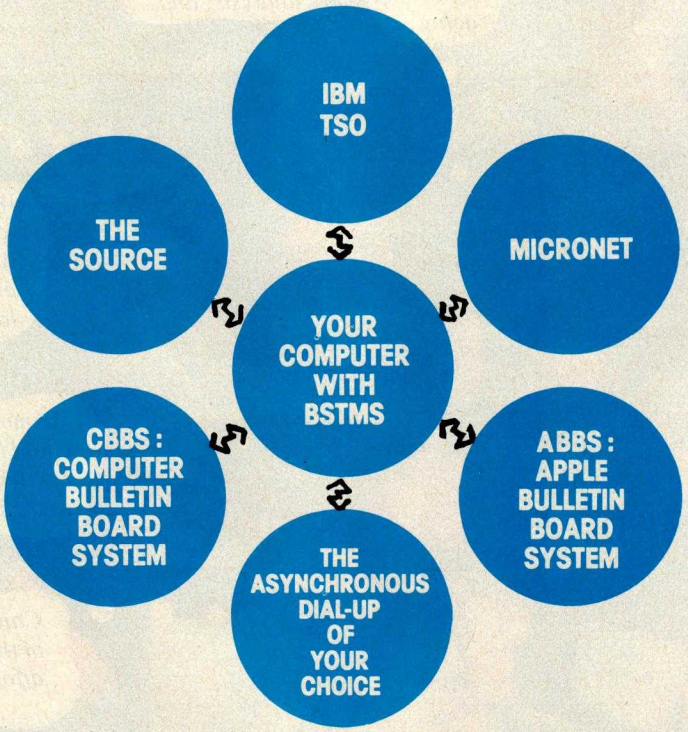

"BSTMS"

Byrom Software Terminal Monitor System

The missing link between your CP/M system and remote computers everywhere!

- talks to most dial-up remote computers.
- stores data from remote computers in CP/M files.
- copies data to CP/M list device if desired.
- transmits files to the remote computer.
- it will even "talk" to another CP/M console.
- features EXPAND and COMPRESS programs to translate binary files into character files and vice versa.
- uses the same simple installation procedure as BSTAM.

This system is great for recording data from remote time-sharing systems! It makes it possible to do local processing of data on a micro and then transmit it to the mainframe.
This software requires a knowledge of assembler language for installation.



$200 per computer.
$25 for manual alone.

Prices reflect distribution on 8" single density diskettes. If a format is requested which requires additional diskettes, a surcharge of $8. per additional diskette will be added.

Apple is a trademark of Apple Computer.
MicroNET is a trademark of CompuServ.
CP/M is a trademark of Digital Research.

Lifeboat Associates
1651 Third Avenue, New York, N.Y. 10028
(212) 860-0300 Telex: 220501

trol lines. Altos does not use the connector for expansion purposes because of its single-board philosophy, but it is there for the special needs of the users.

Optional Components

The ACS8000 has provisions for some special components that are optional on all of the standard systems. The Z80 DMA (direct memory access) controller is a very sophisticated device that can be programmed to perform block data transfers from memory to memory, from memory to an I/O port, or vice versa. The device can also be programmed to search for a byte within a block, with or without transfer of the block. The device has one DMA channel that can be set up to work in four different modes:

- single-byte mode — in which each memory access operates on a single byte of data
- burst mode — in which the device keeps control of the bus for as long as data is continuously ready
- continuous mode — in which the device retains bus control for the entire operation
- transparent mode — in which the device operates only during memory refresh time so it does not slow down the processor

I was informed by Altos that, although the Z80 DMA device can be plugged into the system, there is no way to use it under CP/M. The OASIS multiuser operating system is set up to use DMA to access a disk, however.

The Advanced Micro Devices Am9511 arithmetic processor is another optional device that provides fixed and floating-point arithmetic and floating-point trigonometric and mathematical operations. It may be used to speed up computational capabilities of the system. All commands and data transfers take place on an 8-bit, bidirectional data bus. Transfers to and from the 9511 may be handled by the Z80 under program control (with IN and OUT instructions) or through the Z80 DMA device. The Am9511 can be programmed to generate interrupts upon completion of arithmetic functions.

Altos also plans to introduce a 2708/2716 EPROM programmer that will plug into the parallel-port con-

Text continued on page 166

SAVE on add-ons for APPLE® and TRS-80®

"APEX" NEW DISK OPERATING SYSTEM FOR THE APPLE®

Fully Professional DOS for the Apple II. The result of two years of extensive development, APEX provides a complete program development and file management system. A comprehensive command set allows the user to perform almost any imaginable disk operation.

- Command structure similar to CPM® and main frame systems. Contains 20 command words.
- Easy program interface. Simple communications.
- Capable of handling 5 inch, 8 inch, and hard disks.
- Safety features to protect against accidental data loss. Features include backup files, directory, read after-write & limit checks.
- 4 times faster than CPM®.
- Auto default structure eliminates tedious typing by automatically setting up command strings, file names, etc.
- Functional on both single and multi-drive systems.
- Device handler structure for interfacing peripherals.

The APEX package includes all of the tools for a complete assembly language development system, high speed two pass resident assembler and a powerful macro editor.

The complete APEX package with operating system, assembler, editor and manuals, also includes utilities to maintain files.

APEX $99

RELATED SOFTWARE

XPLO $79
FOCAL™ $59

SAVE ON APPLE II 16K



FREE MEMORY UPGRADE KIT TO 48K WITH PURCHASE OF APPLE II 16K (MTI ONLY) **$1195**

INTRODUCTORY OFFER
SAVE $300 TRS-80 Graphics List $949



OKIDATA MICROLINE 80 OUR PRICE **$649**

Z-80 SoftCard $399

The Source $100
Applesoftware .. $29.95

MTI APPLE 8" DISK SYSTEM

*One SA800R Floppy
*1 Drive Chassis & Power Supply
*Controller, Cable and DOS

$1439


Drives for any Microcomputer

Does not include power supply & cabinet.

Pertec FD200	$282	FD250	$359
Shugart SA400	$279	SA800/801	$479
MPI B51	$279	B52	$349
MPI B91	$399	B92	$525

Printers

Centronic 779	$1,069
Base 2	$649
Centronics 737	$939
Centronics 702-9	$1,995
Anadex 9501	$1,549
Malibu	$2,395
Spinwriter	$2,549



Daisy Wheel $1,779

NEWDOS80

A new enhanced NEWDOS for the TRS-80.


The most powerful Disk Operating System for the TRS-80, designed for the sophisticated user and professional programmer who demands the ultimate.

NEWDOS/80 is the planned upgrade from NEWDOS 2.1. Some of the features are:

- New BASIC commands for files with variable record lengths up to 4095.
- Mix or match drives. Use 35, 40 or 80 track 5" disk drives or 8" disk drives, or combo.
- Security boot-up for BASIC or machine code application programs.
- New editing commands.
- Enhanced RENUMber that allows relocation.
- Command chaining.
- Device handling for routing to display and printer simultaneously.
- DFG function; striking of D, F and G keys allows user to enter a mini-DOS without disturbing program.
- Compatible with NEWDOS & TRSDOS.
- Machine language Superzap/80 2.1 utilities and enhanced debug and copy. **$149**

Disk Drive Sale!

Complete with power supply and chassis.



TF-3 Shugart SA400	$339
Pertec FD200, 40 track	$379
★TF 5 MPI B51, 40 track	$369
★TF 7 Micropolis 77 track	$579
TDH-1 Dual Sided drive 35 track	$499
TF-3M Drive Sys 2 Shugart	$699

Disk Expansion System

•2 Shugart SA400 TF-3	$678
•1 Two-Drive Cable	$ 26
•1 Expansion Interface 32K	$459
•1 35-track DOS+	$ 99
TOTAL LIST PRICE	$1262
SPECIAL PRICE ONLY	$1,149
Same as above but includes TRS-80® Level II	$1949

NEWDOS+ 40 track	$110
NEWDOS+ 35 track	$ 99
Microconductor, Data Base Mgr. Mod I	$249
Mod II	$399
AJA Business Pkg.	$359
The Source	$100
Basic Compiler	$195
Mail List	$60
Electric pencil	$150

NEW

TF-8 80 TRACK DISK DRIVE Double Your Capacity **$639**

TF-9 DUAL 80 TRACK DISK DRIVE Quadruple Your Capacity **$789**

8" Floppy Disk Drive System

for Model I



- One SA801 Floppy
- NEWDOS 80
- Cable & Adapter

$1095

MICROCOMPUTER TECHNOLOGY INCORPORATED
3304 West MacArthur
Santa Ana, CA 92704
(714) 979-9923

TELEX 678-401 TAB IRIN
Order Desk Only 800-854-7222

BANKAMERICARD VISA master charge THE INTERBANK CARD

ALL PRICES CASH DISCOUNTED
FREIGHT FOB/FACTORY
ASK FOR OUR FREE CATALOGUE

Apparat, Inc.
4401 South Tamarac Parkway
Denver, CO 90237
(303) 741-1778

Circle 98 for MTI

Circle 99 for Apparat

CP/M Features With Altos Systems

All the standard CP/M system utilities are available:

- *ED: context (text) editor.*
- *ASM: CP/M standard (no-frills) 8080 assembler.*
- *LOAD: loader, converts hexadecimal-ASCII format files to absolute machine-code files.*
- *DDT: CP/M Dynamic Debugging Tool.*
- *PIP: Peripheral Interchange Program that is used to move and copy disk files from disk to disk and can also be used to copy files from disk to printer or from a reader device to disk.*
- *SYSGEN: CP/M utility that generates new system disks.*
- *DUMP: prints the contents of a file on the display in hexadecimal (base 16) form.*
- *SUBMIT: CP/M batch facility: executes a series of console commands from a disk file.*

Some additional commands and utilities are available:

- *MOVCPM: CP/M utility that is used to relocate the CP/M operating system depending on system memory size.*
- *STAT: displays status of various device assignments and shows the amount of free space left on each on-line.*
- *MTS: memory-test program that performs a destructive memory test on system memory.*
- *SETUP: utility that modifies the boot-load sector of a disk. It also allows a disk to be flagged for single- or double-density operation and sets the printer data rate at boot-load time.*
- *REFORM: disk-formatting utility that allows the user to format a disk for single- or double-density operation. Disks may be formatted to be either IBM 3740- compatible or Intel ISIS-II format. Altos has its own format for double density.*
- *DTEST: disk-test utility that checks out both drives and disks on the system.*
- *SINGLE: followed by the letter designation of a drive (A, B, C, D), will set up the drive for single-density operation.*
- *DOUBLE: works the same as SINGLE but sets the designated drive for double-density operation.*
- *COPY: will copy data track by track from the disk in drive A to drive B.*
- *FILES: will display the file-control-block information in hexadecimal for all files on a disk.*

Other files are included with the system:

- *BOOT.ASM: an assembler source for the boot loader.*
- *ALTOSE.ASM: an assembler source for the ALTOS-E 2708 EPROM.*
- *CBIOS.ASM: an assembler source for the custom Basic Input/Output System (CBIOS) in CP/M. This allows the user to make further operating-system modifications as needed.*

UCSD Pascal Operating System

Initializing the System

In order to make UCSD (University of California, San Diego) Pascal fully operational on the Altos, a user-written procedure that does direct cursor addressing on video terminals must be added to the operating system. Referred to as GOTOXY, the procedure accepts two integer variables as input and positions the cursor on the screen accordingly. Since there are so many different video terminals, it is the responsibility of the user to write the GOTOXY procedure. After compiling it, the user must execute a program called BINDER which links GOTOXY to the SYSTEM.PASCAL file.

The other initialization program is called SETUP. When executed, the user is given a set of options including Help and Teach. SETUP modifies a table of key assignments and terminal commands, allowing the user to customize the operating system to a particular terminal. Most keys may also have a prefix (eg: Escape) to allow for terminals that send escape sequences for certain user-definable keys. For example, many terminals have a separate keypad for cursor control (eg: Up, Down, Home, etc). The escape sequence for "cursor home" on many terminals is Escape-H; or 27,72 in decimal ASCII codes. In SETUP, the cursor-home function could be defined as having a prefix code and the decimal value 72 (or H as the character code).

Other Features

The Pascal Operating System has some other unique features. When compiling a program, Pascal will list error messages and ask if you want to continue or return to the editor. If the latter option is chosen, the operating system loads the editor and places the cursor on the character where the compilation error was detected. This feature saves a great deal of time when correcting syntax and logic errors.


The Filer also has some interesting features. Basically, the Filer is a utility program that lists directories of disks and manipulates files directly in the conventional disk-operating-system mode. On request, the Filer will create a duplicate directory for backup purposes. The Filer also has a routine for locating bad blocks on disk. If a bad sector is found, it will be marked as an immovable file in the directory.

Altos is marketing Pascal/M and a C compiler. The firm is also in the process of providing hard-disk backup on cartridge tape. The company is also introducing an asynchronous communications package for Altos computers (price: $100) and a bisynchronous IBM 3780 protocol package that allows the Altos to go on line in batch mode to an IBM host computer. The price is $1000.

In version II.0 of Pascal, the Debugger package is missing. I was informed by Altos that it was having problems with it and that a new version would be available with the next release. Altos also said that Pascal/M does have a full Debug option and that it will be available shortly.

Circle 100 on inquiry card. →

For those special people who've stepped ahead with a mini-computer

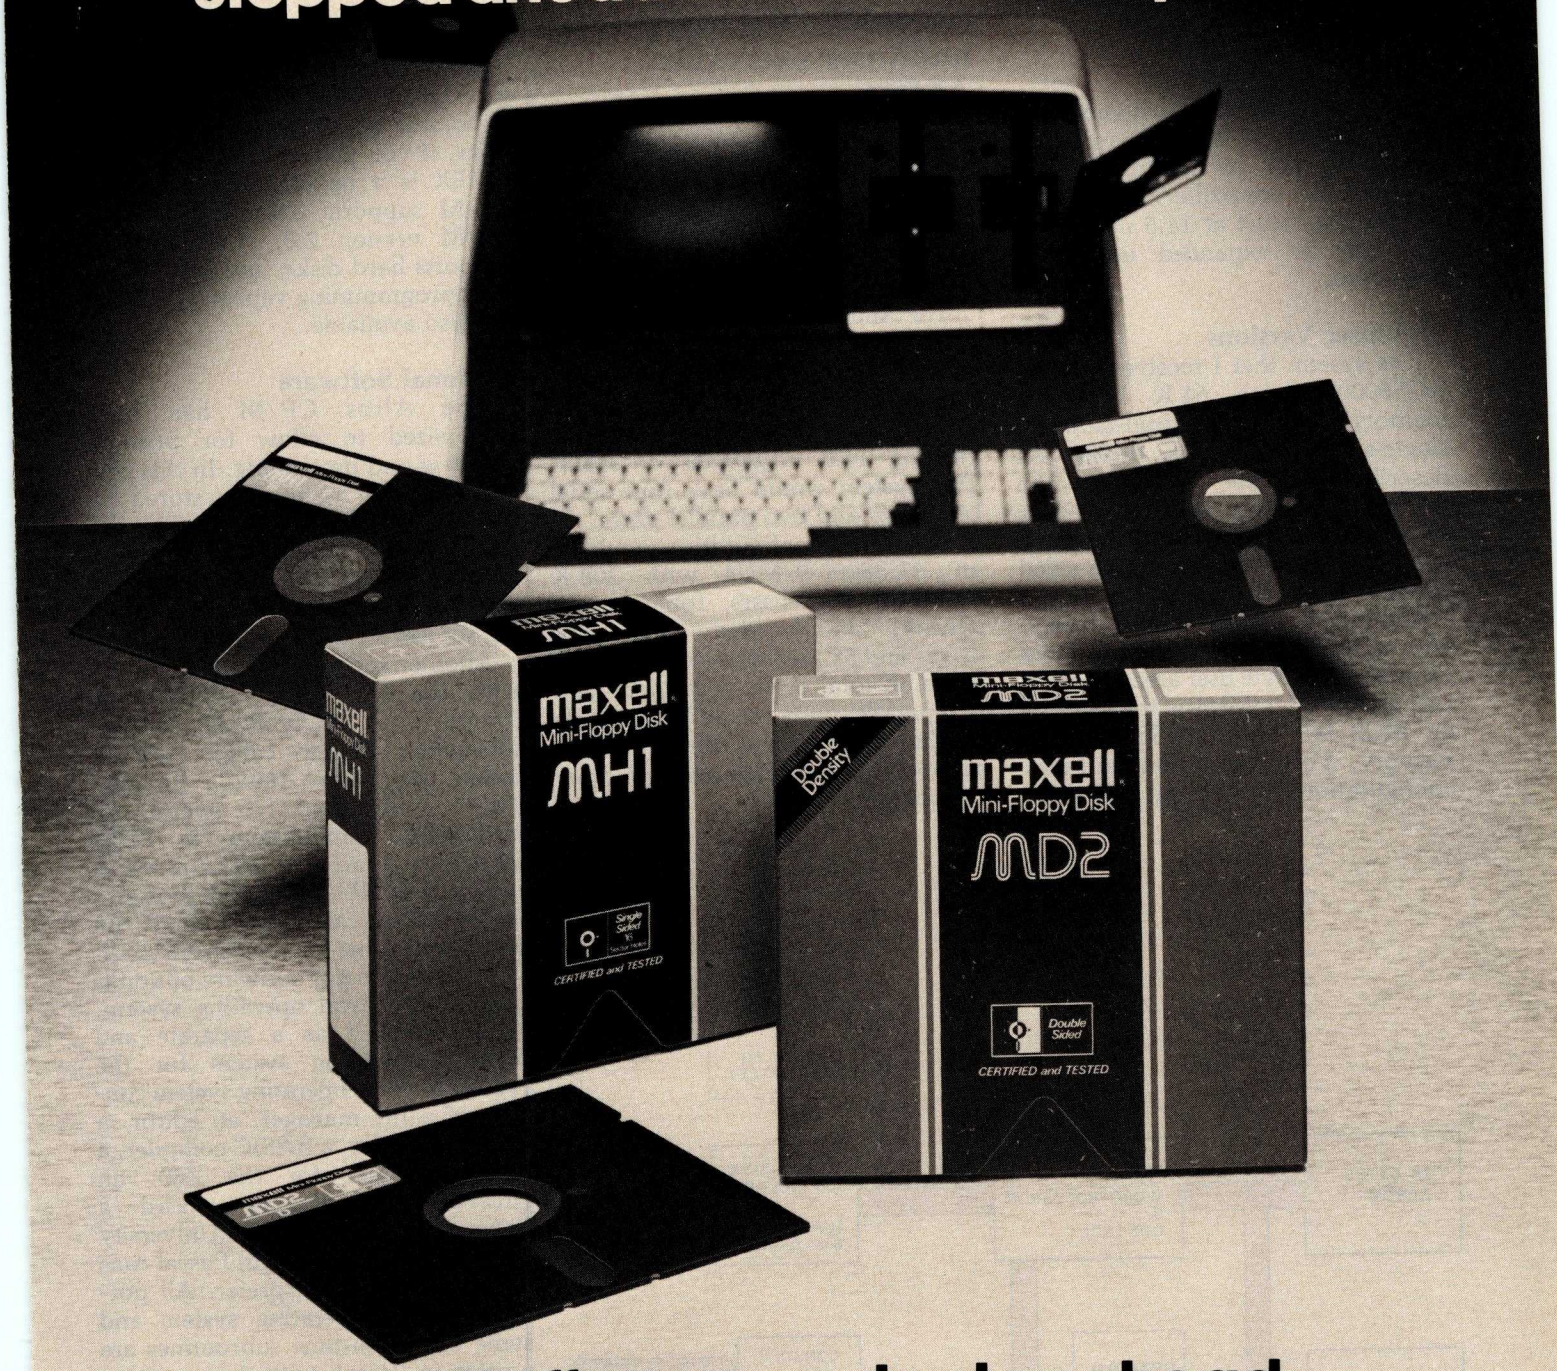

Maxell offers a way to stay ahead.

A Maxell 5¼" Mini-Disk will consistently let you maximize the capability of your system today. And as your involvement with it grows, tomorrow as well. Maxell Mini-Disks are all made with the same exacting 100% certification and critical dependability of the Maxell 8" Floppy Disk. So you know your 5¼" Maxell Mini-Disks meet or exceed the same ISO and Shugart specifications industry requires.

There are double density Maxell single and double-sided 5¼" Mini-Disks for soft and hard sector systems. And 8" Maxell Floppy Disks for every disk drive configuration. See your computer supply dealer or write to us for more information. If you are a computer products dealer, write for the growing opportunities Maxell Business Products Division offers you with our 8" Floppy and 5¼" Mini-Disks.

maxell®

BUSINESS PRODUCTS DIVISION

Maxell Corporation of America, Business Products Division, 60 Oxford Drive, Moonachie, N.J. 07074 Tel: 201-440-8020

Text continued from page 162

nector. This project has been delayed because of software development priorities.

Hard-Disk Capability

Altos' third single-board version of the ACS8000 has an on-board hard-disk controller in addition to the floppy-disk controller. Hard-disk storage may start at 14.5 megabytes and can be expanded up to 58 megabytes.

Multiuser Versions

The system that I received was an ACS8000-2 with 64 K bytes of memory and two dual-density, single-sided floppy-disk drives. As described in the literature, the ACS8000-2/MU2 is a two-user system with 112 K bytes of memory and two double-density single-sided drives.

Memory is divided into banks, with a 16 K-byte system area and two or more 48 K-byte user areas. A four-user ACS8000-2/MU4 is the same as an MU2 but with 208 K bytes of memory. The largest non-hard-disk configuration would be an ACS8000-4/MU4 with 208 K bytes of memory for four users and four double-density, double-sided floppy-disk drives.

All Altos systems run either CP/M or Altos multiuser executive AMEX.

The smallest hard-disk multiuser configuration would be an ACS8000-6/MU2 with 112 K bytes of memory, two double-density, single-sided drives and a one-platter hard disk yielding 14.5 megabytes of space. This system would have four serial I/O ports and two parallel ports.

The largest configuration would be an ACS8000-9/MU4 with 208 K bytes for four users, four double-density, double-sided floppy-disk drives and 58 megabytes of hard-disk space. A total of six serial ports and two parallel ports would be available on the system; these can be used to support four terminals and two other peripherals.

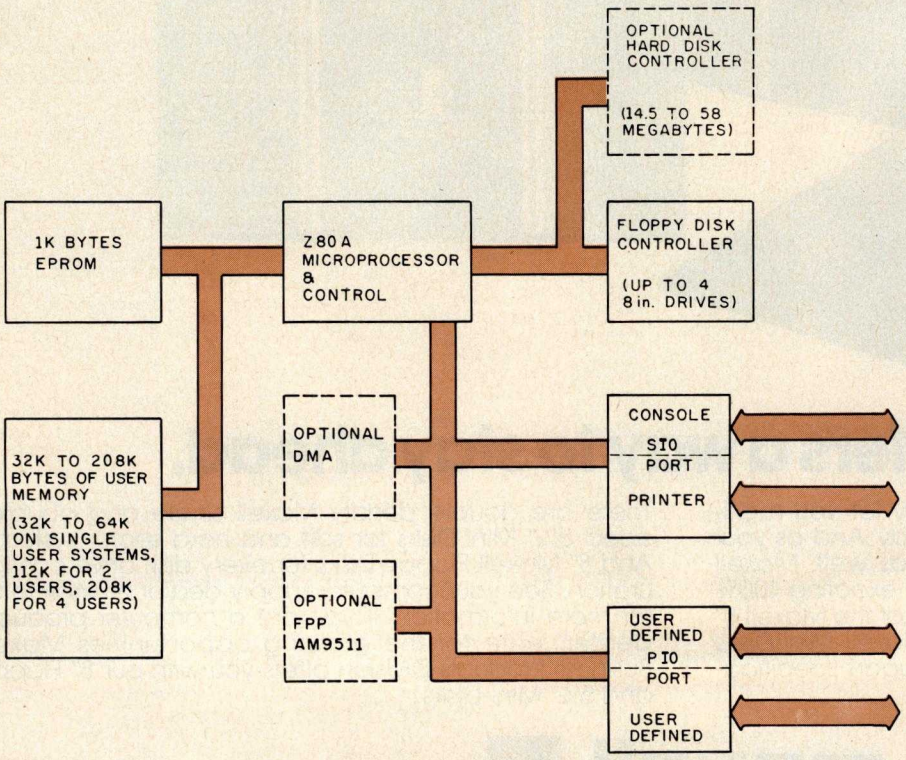


Figure 1: *Block diagram of the Altos ACS8000 systems.*

Software

All Altos systems run either Digital Research's CP/M operating system or Altos multiuser executive AMEX. AMEX is functionally compatible with CP/M, using the same disk formats and operating-system conventions. If you plan to use a hard disk, AMEX is a necessity since straight CP/M supports only floppy disks. CP/M version 2.0, which directly supports hard disks, and MP/M, the multiprogramming version of CP/M, are also available.

Optional Software


The Altos CP/M has been customized to allow for printout *spooling* and *despooling*. In this process, printed material is stored on disk until the printer is free. This option allows printers to be driven in the background mode so that printing may go on while the computer is doing something else.

Another software option is for use with the Microsoft FORTRAN-80 compiler. A FORTRAN service-subroutine library called APULIB makes use of the Am9511 floating-point processor to speed up arithmetic computations in FORTRAN by a factor of 10 or more. A typical FORTRAN program performing extensive calculations could run about four times faster with APULIB.

The other major software option is the UCSD Pascal operating system. Altos offers it as a separate and distinct operating system for the ACS8000. This operating system consists of a file manager, an editor, a Pascal compiler, a BASIC compiler, a macroassembler for the Z80, an interactive debugger, and a linker/librarian. UCSD (University of California, San Diego) Pascal runs as a P-machine interpreter. All portions of the operating system and some other run-time subroutines are written in Pascal, with the exception of portions of the P-machine interpreter. Pascal is also patched to handle the Am9511 arithmetic processor for greater computational speed. The Z80 CTC is also set up to act like a real-time clock. Unfortunately, the real-time clock is not accessible by the user; it is used internally to improve the performance of the disk interface.

Altos Documentation

The manual shipped with the Altos consists of the following segments:

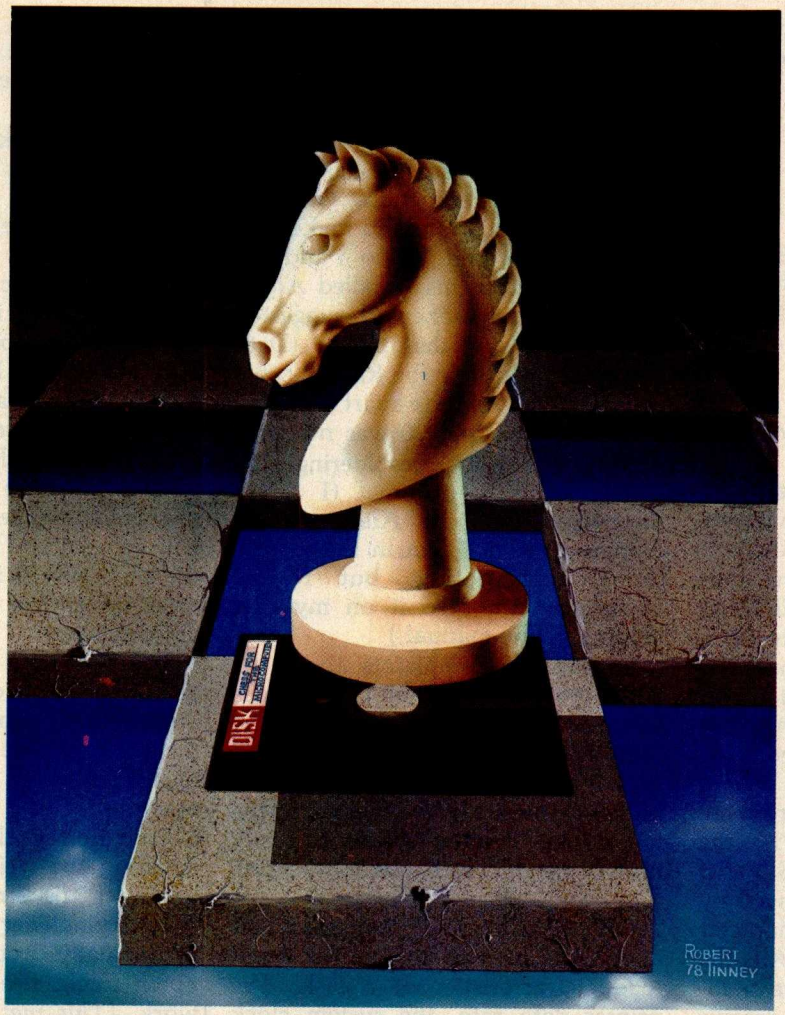

Copyright © Robert Tinney 1978

Beautiful "Computer Chess" Reproduction—only $7.95!

This dramatic reproduction of the October '78 Byte cover art has been produced with the same care and quality as limited edition prints—yet it is available for the price of a poster.

The overall size is 18" x 22", which includes a 1½" border. It is printed on heavy, 80 lb., matte finish, coated stock, excellent for the finest framing if desired.

The price of this quality reproduction is $7.95, plus $2.00 for mailing tube, handling, and postage. ~~In addition, the artist, Robert Tinney, will select the 100 finest prints from this first edition for his personal signature and number. These 100 signed and numbered prints will be sold on a strictly first-come basis for $24.00 plus $1.00 postage and handling.~~

SOLD OUT

See coupon below for ordering.

Send me ___ of the $7.95 posters, ~~and ___ of the $24.00 signed prints.~~ I have included $2.00 for postage and handling.

Please charge this to my Visa/Master Charge: Visa card number: Master Charge no: Card expires:

signature

Name: Address: City: State: Zip:

Make check payable to:

robert tinney graphics
1864 N. Pamela Drive
Baton Rouge, LA 70815

- an operating manual which contains a hardware and software overview section
- setup and checkout guides
- a CP/M operating guide
- a troubleshooting section
- all the schematic diagrams

The manual also includes the SA800/801 disk-drive maintenance manual and six publications from Digital Research covering all aspects of CP/M.

Setting Up and Using a New System

My Altos is hooked up to a video terminal set to 9600 bps. When power is applied, the Altos displays the two prompt characters %* on the console, which means that the EPROM monitor is in control. (If reset is depressed, the same response is given.) If a floppy disk is inserted into drive A (the drive on the right-hand side) and reset is depressed, the monitor will automatically begin loading the operating system from the disk. If you are running CP/M, the message "32 K ALTOS DOS VERS 1.47" will be displayed, followed by A> on the next line. The A character means that the disk in drive A is the currently active disk, while the > indicates that CP/M is ready to receive commands.

After the machine displayed the A> prompt, I tried to enter the DIR command to display the directory, with no success. I reset the system and tried again — still nothing. Then I decided to check the RS-232 cable and connectors to see if the transmit and receive lines were hooked up properly. After experimenting with my own 8080-based system to make sure the terminal would talk to it and still finding no problems, I called Altos: the gentleman I spoke with suggested that I make sure that pin 20 (Data Terminal Ready) of the RS-232 cable was hooked up. I took apart my cable and found that pin 20 was not connected. A quick resoldering job solved the problem. (I later discovered that the Altos manual discusses the problem in the section on troubleshooting, but I had apparently not seen it on my first reading of the manual.)

One of my complaints about the Altos is that the console data rate is defined in firmware — in the EPROM. The system can be used only if you have a 9600 bps terminal (at least, to start with). Even after the initial load, there is no way to easily modify the data rate short of creating a new EPROM.

CP/M has a SETUP command that allows the user to change the bootload characteristics of a disk. The printer data rate, the system clock rate (2 MHz or 4 MHz), and the density of the disk may be redefined for each system disk. It would seem reasonable to be able to modify the console data rate also, but this is not currently the case.

Formatting Disks

The next thing I tried to do was to create a backup copy of the master system disk. The documentation for this procedure is fairly accurate, but important instructions are left out.

The first step is to insert a blank disk (with the label side facing down) into drive B, the left-hand drive. The REFORM command will reformat a disk for any of several disk formats. After typing in REFORM, the computer asks you to enter a number corresponding to the type of format that will be used and to indicate whether the blank disk is in drive B (in a two-drive system) or drive D (in a four-drive system).

The first time I tried to format a disk, I got errors on top of errors. The documentation failed to mention that the write protect notch on the disk must be covered to allow read/write operation. Since I usually work with 5 -inch floppy disks, I am used to covering the write protect notch to protect a disk, not to unprotect it. After trying everything I could think of, it finally occurred to me that the notch might need to be covered to work. [*This method of disk protection is standard for 8-inch disks, so neither Altos nor its documentation is in error here. Still, this situation*

At a Glance

Name of computer	*Altos ACS8000 series*	*Software included*	*ALTOS-E monitor (in read-only memory)*
Manufacturer	*Altos Computer Systems 2360 Bering Dr San Jose CA 95131 (408) 946-6700*	*Hardware options*	*an 9511 arithmetic-processor board; Winchester hard disk; multiple users*
Price	*from $2840 (ACS8000-1S)*	*Software options*	*Operating systems: AMEX, CP/M, MP/M, OASIS, UCSD Pascal.*
Processor	*Z80A (8-bit)*	*Languages*	*FORTRAN-80; MBASIC, MBASIC-80, CBASIC II; COBOL-80, CIS COBOL; Vanguard APL, PL/I-80, Z80 Macro Assembler*
Memory	*64 K bytes (expandable to 208 K bytes on a multiuser system)*		
Mass Storage	*one to four 8-inch, single- or double-density, single- or double-sided, Shugart floppy-disk drives*		
Other hardware features	*includes serial printer port, two user-definable parallel ports*		

Circle 101 on inquiry card. →

THE SOLUTION STORE℠



. . . Makes The Difference!

MicroAge Computer Stores sell solutions to your professional, business and household-management problems, not just hardware. That's what makes the MicroAge difference! From systems integration to easy-to-understand application software, research and development to warranty service and repair, systems consulting to training and installation. In all these, we offer the latest, most innovative approaches. That's why we are the forerunners . . . the pioneers in the microcomputer industry.

But don't just take our word for it. Visit the MicroAge Computer Store nearest you and see the difference solutions make. We have differences you'll experience with every time- and money-saving idea. The difference that will keep you satisfied now and for years to come!

MicroAge. COMPUTER STORE

"Where Vision Becomes Reality"

611 Rockville Pike
Rockville, Maryland
(301) 840-9315

1707 Monroe Avenue
Rochester, New York
(716) 244-9000

2065B El Camino Real West
Mountainview, California
(415) 964-7063

83 South 10th Street
Mineapolis, Minnesota
(612) 338-1777

24 W. Camelback
Phoenix, Arizona
(602) 265-0065

2591 Hamilton Road
Columbus, Ohio
(614) 868-1550

5742 E. Broadway
Tucson, Arizona
(602) 790-8959

1220 Melbourne Drive
Hurst, Texas
(817) 284-3413

2525 N. Scottsdale Road
Scottsdale, Arizona
(602) 941-8794

1490 W. Spring Valley Road
Richardson, Texas
(214) 234-5955

4550-50 E. Cactus
Phoenix, Arizona
(602) 996-2910

Coming soon to:
El Paso, Texas
Denver, Colorado

FOR FRANCHISE OPPORTUNITY INFORMATION CALL (602) 967-1421

always causes problems for people who are accustomed to working with 5-inch floppy disks. . . .GW]

Altos Demonstration Programs

The CP/M disk that came with the system had a number of demonstration programs, including a biorhythm program in BASIC, a rather poor implementation of tic-tac-toe, a number-guessing game, and a program that did nothing but compute and print square roots. The business package demonstration programs included a payroll generator and an automobile parts-list/inventory program.

The only documentation provided with any of these business demo programs was a single typed page giving hopelessly inadequate operating instructions. I never succeeded in making any of the nongame programs work.

Final Remarks

- The hardware of the Altos ACS8000 is well designed, although the documentation of some of its components is absent. The computer uses several sophisticated, optional support chips such as the counter-timer, the serial and parallel ports, and the Am9511 arithmetic processor. However I had to look over the manufacturers' specification sheets and application notes to find out anything about them.
- The software of the Altos ACS8000 is not as well supported, but the CP/M, AMEX, UCSD Pascal, and OASIS operating systems are available. Altos has provided no software support for the specialized hardware built into the system.
- Languages available from Altos include FORTRAN-80, MBASIC, MBASIC-80, CBASIC II, COBOL-80, CIS COBOL, Vanguard APL, PL/I-80,. and Z80 Macro Assembler. Numerous other languages are available from other sources for use with the CP/M operating system.
- The Altos ACS8000 is strong on hardware and weak on software and documentation. Perhaps someday the Altos people will get around to documenting and supporting the best selling points of their product line. ■

SciTronics introduces the first small computer based power monitor . . .

NEW! **ENERGY WATTCHER**™

Now have your computer continuously measure, calculate and record your power consumption and cost. Receive energy reports every minute, 15 minute, hour, day and month period.

- Available for TRS-80-I, Apple II & S-100 computers.
- Easy installation clip-on probes supplied.
- Qualify for a 15% energy tax credit.
- Compatible with Remote Controller & Real Time Clock for complete Energy Management System.
- Inexpensive—only $295.

Remote Controller & Real Time Clock Available

Have full computer control of up to 256 lights, appliances and even wall switches **without special wiring.** The SciTronics REMOTE CONTROLLER permits direct control of the inexpensive BSR remote line-carrier switches sold by Sears, Radio Shack and many others.

- Controls all 256 BSR remote switches—not just 16
- Hardware driven—requires minimal software
- No ultrasonic link—prevents erractic operation
- No BSR command module necessary
- Real time, crystal controlled clock available

The controller comes complete with full documentation, sample software and is designed to work with most of the popular computers including any S-100 based system, TRS-80-1, Apple II, Heath H8 and others.

Real time clocks are available for all of the above computer systems. When used with the controller, true time scheduling is realized. All clocks are crystal controlled and have battery backup for accurate and reliable operation. Interrupts allow Foreground/Background operation of two programs simultaneously. Clock data includes year, month, date, day of week, hour, minute, and second.

Applications:

- Make your entire home or apartment computer controlled
- Save energy by controlling lights & appliances
- Control security systems & alarms



Remote switches not included

ENERGY WATTCHER	**$295.**
S-100 CONTROLLER BOARD	**$159.**
S-100 REAL TIME CLOCK BOARD	**$139.**
ENCASED CONTROLLER (TRS-80, Apple II etc.)	**$184.**
ENCASED CONTROLLER & REAL TIME CLOCK (TRS-80, Apple II etc.)	**$269.**
APPLE II CLOCK BOARD	**$109.**

Send check or money order to: **SciTronics Inc.**
523 S. Clewell St., P.O. Box 5344
Bethlehem, PA 18015
(215) 868-7220

Please list system with which you plan to use peripheral. Master Charge and Visa accepted. PA residents add sales tax. COD's accepted.

Dealer Inquiries Invited

Circle 102 on inquiry card.

GOOD NEWS FOR CBASIC-2$_{tm}$ USERS

INTRODUCING QBASIC

Now you can move up to a 16 bit multi-user system with a *real machine code* compiler that accepts your existing programs.

QBASIC is the latest in Marinchip Systems growing line of software for our M9900 computer. While preserving source language compatibility with the widely used CBASIC-2$_{tm}$ language, QBASIC generates real machine code for the M9900's 16 bit processor. QBASIC programs run up to ten times faster. Separate compilation of program modules is permitted. Assembly language calls are made more simple and flexible.

So, if you like CBASIC$_{tm}$, but are limited by its performance and the hardware and operating systems it runs on, contact us about our new QBASIC.

QBASIC is only the latest member of the M9900 hardware and software line that include the following major features:

* Advanced 16 bit processor
* S-100 Bus flexibility
* Unix$_{tm}$ like multi-user operating system
* Memory size up to 16 megabytes
* Pascal, Assembler, and BASIC$_{tm}$ interpreter
* Hard disc or floppy available
* Prompt quantity delivery with attractive discounts
* Applications available: General Ledger, Accounts Payable and Receivable, Payroll, and Text Formatter
* Superb user manuals
* Three year track record of hardware and software reliability
* Systems, boards, kits, and software available
* Both 8 and 16 bit memory supported

Complete dual floppy single user systems from $5500, and floppy or hard disc multi-user systems configured to your requirements.

Call or write for complete specifications and price list.

CBASIC is a trademark of Compiler Systems
UNIX is a trademark of Bell Laboratories
BASIC is a trademark of the Trustees of Dartmouth College

Marinchip Systems

Computer Power and Human Reason
16 St. Jude Road

Mill Valley, CA 94941
(415) 383-1545

Advertising Design: Asterisk Associates

Circle 103 on inquiry card.

Seventh Annual SIGGRAPH Conference

Kenneth Livingston
225 Nebraska Hall
University of Nebraska
Lincoln NE 68508

Mark Dahmke
1515 Superior, Apt 15
Lincoln NE 68521

The Association for Computing Machinery (ACM) Special Interest Group on Computer Graphics (SIGGRAPH) held its seventh annual conference on July 14 thru 18, at the Seattle (Washington) Center (former site of the Seattle World's Fair). This conference, like all of the recent SIGGRAPH conferences, was extremely well attended. Over 1200 people registered for the two-day preconference tutorials. More than 2300 people registered for the three-day conference itself. Participants came from nearly every state, Canada, several European countries, and Japan.

Preconference Tutorials

Each year, the conference organizers have sought to provide participants with an opportunity to not only attend the conference, but also to acquire additional information and expertise about graphics through a series of tutorial sessions. These are led by well-known computing and graphics professionals from both industry and education. This year's eight tutorial sessions included these topics:

- Introduction to Computer Graphics
- Introduction to Raster Graphics
- Advanced Raster Graphics
- Computer-Aided Design
- Low-Cost Graphics
- Graphic Design and Information Graphics
- Animation Graphics
- User Interfaces to Graphic Systems

These tutorials ranged in level of expertise from novice to expert and provided a means for everyone to advance technically.

The session on low-cost computer graphics addressed issues relating to the use of graphics capabilities of personal-computing hardware. Many of these systems can be configured at costs of about $2000. Given today's economy, systems in this price range can be very appealing to small businesses, public-school systems, and small colleges and universities. At the other end of the scale are large CAD/CAM (Computer-Aided Design/Computer-Aided Manufacturing) systems. Typically, these systems are quite expensive, ranging from $40,000 to $300,000 for top-of-the-line systems. Obviously, smaller and less expensive (and, therefore, less comprehensive and versatile) systems exist. The computer-aided design tutorial addressed the needs of medium- and large-scale industry users of CAD/CAM systems.

Included in this session were discussions of CAD/CAM standards for data bases and techniques used for geometric modeling. Geometric modeling is a term used to describe the process of representing a three-dimensional object by a series of Cartesian, polar, or homogeneous coordinates with (or without) a series of equations. The object may or may not exist prior to the construction of the numerical or geometric model.

Three other tutorials on raster graphics and animation were oriented toward the use of raster-scan devices. Because raster-scan devices essentially use standard television technology, there is a significant price and performance advantage in their use. Personal-computer owners should be aware of this advantage, as many microcomputer systems have utilized raster-scan (television) technology from the beginning. Discussions of algorithms for modeling three-dimensional objects, simulation of light sources (shading and shadows), surface textures, and display optimization dominated these sessions. An emphasis was placed on the creation of realistic-looking images.

Another group of tutorials centered on what might be termed *human factors* in computer graphics. Human factors means the interface between human beings and machines. It is an area of computing in general that, while not being totally overlooked, has certainly been slighted. Those of us involved in interactive computing (including graphics) realized long ago, by necessity, how important a friendly, forgiving, and possibly even *natural* interface is for successful communication between people and machines. The frustration of having an interactive program bomb or hang before completing its task can be overwhelming.

Our batch-oriented colleagues have discovered this recently, primarily because on-line data bases are becoming more popular, and more batch-oriented computing professionals are finding their way into interactive projects. Recently, we have begun to discover the importance of aesthetically pleasing and more understandable graphic output. Many computer-graphics specialists have come into this area from the technical side, rather than from the artistic side. It should come as no surprise, then, that graphic designers can offer much sound advice about graphics layout and design. This information can be very valuable in businesses where executives are accustomed to expecting and demanding professional quality for graphics presented at board meetings and in annual reports. Two tutorials concentrated on psychological aspects, design methodologies, subjective evaluation, and design concepts as they relate to computer-graphics systems.

All of the tutorials were well attended. Although we were unable to attend all of them (they ran concurrently), those sessions we attended were well thought out and carefully presented.

Photos 1 thru 6 by Kenneth Livingston.

AUTHORIZED TRS-80® DEALER A301


COMPUTER SPECIALISTS

MODEL II




26-4002
64K 1 Drive
$3499.00

MODEL III



26-1061 4K I.....$630.00
26-1062 16K III.....900.00
26-1063 32K III
2-Drives, RS232.....2246.00



CENTRONICS

Fast 100 CPS Centronics
730 Printer.....$675.00
Text Quality Centronics
737 Printer.....$850.00

Model II Cobol Compiler
$360.00
Cobol Run Time Package
$36.00


26-1056 16K Level II System with Keypad. $670.00
26-1145 RS-232 Board.....84.00
26-1140 "O" K Interface.....249.00
26-1141 "16" K Interface.....365.00
26-1142 "32" K Interface.....476.00
26-1160 Mini Disk - Drive O.....424.00
26-1161 Mini Disk - Additional.....424.00
26-1154 Lineprinter II.....720.00
26-1156 Lineprinter III.....1799.00
26-1180 Voice Synthesiser.....339.00
26-1181 VOXBOX.....145.00
26-1104 Factory Upper/Lower
Case Modifcation Installed.....70.00
26-1506 Scripsit - Tape.....60.00
26-1563 Scripsit - Disk.....85.00

NOTE: Call for availability of VIDEO TEX, Model III, Color, and other new products.

ALL OTHER R.S. SOFTWARE FURNITURE, STANDS, CABLES AND ACCESSORIES DEDUCT 10% FROM CATALOG PRICE


Novation Cat Modem..$149.00
CCA Data Management
System.....72.00
Adventure Games
Games 1-9 each.....14.00

Pocket Computer




26-3501 1.9K P.C.....$225.00
26-3503 Cassette I/F.....45.00
14-812 Recorder.....72.00

MODEL I



26-1054
4K Level II
$552.00

COLOR



26-3001 4K.....$360.00
26-3002 16K.....540.00
26-3010 Color Video.....360.00
26-1206 Recorder.....54.00
26-3008 Joysticks.....22.50

Acorn Software Products, Inc.

GAMES:
Alien Invasion.....$9.00
Stock Market.....9.00
Star Trek.....9.00
Block 'Em.....9.00
Ting-Tong.....9.00
UTILITIES:
System Savers.....14.00
EDUCATION:
Language Teacher.....18.00

FREE: PRICE LIST
UPON REQUEST

1-800-841-0860 Toll Free Order Entry

MICRO MANAGEMENT SYSTEMS, INC.

No Taxes on Out Of State Shipments

Immediate Shipment From Stock on Most Items

DOWNTOWN PLAZA SHOPPING CENTER
115 C SECOND AVE. S.W.
CAIRO, GEORGIA 31728
(912) 377-7120 Ga. Phone No.

Full Factory Warranty on All Items Sold.

Largest Inventory In the S.E. U.S.A.

*TRS-80 is a registered trademark of the Tandy Corp.

Circle 104 on inquiry card.

The Conference

In an attempt to emphasize the importance of graphic-design concepts and the human-factors side of computer graphics, the first session was a special panel presentation chaired by Aaron Marcus, research consultant at Lawrence Livermore Laboratories. This panel featured graphic designers from the United States and Europe. They agreed that we have seen far too many examples of poorly designed graphics—especially computer-generated graphics. Anyone engaging in computer graphics would do well to obtain and read some good textbooks on graphic design, in addition to their computer-graphics texts. While a chart or graph is more understandable than a table of numbers, a well-designed chart or graph is more readable than one which has had no design principles applied to its creation.

The remainder of Wednesday's sessions were split into two concurrent sessions. Papers presented in one group of sessions were quite technical in nature: "The Theory, Design, Implementation and Evaluation of a Three-Dimensional Surface Detection Algorithm" and "Simulation and Expected Performance Analysis of Multiple Processor Z-Buffer Systems." Papers presented in the other group of sessions were more applications-oriented: "Geographic and Data Base Systems" and "Computer Graphics Moves into the Business World."

The latter area is of specific interest to one of us (Livingston), who is currently involved in the integration of computer graphics and market research. According to Carl Machover of Machover Associates, who chaired the business-graphics panel discussion, there are four computers used in business applications for every computer used in CAD/CAM types of applications. Assuming that these figures are accurate, the business-computer graphics potential is enormous. This position is supported by IBM's recent entry into the low-cost, color, business-graphics marketplace with its Model 3279 display terminal. Recent articles in *Harvard Business Review* (January 1980) and the *Wall Street Journal* also seem to reinforce this position.

Thursday's sessions embraced a wide variety of topics. Sessions dedicated to graphics software and languages, surfaces, and applications filled the morning. Papers were presented at these sessions ranging from the design of a LISP-based graphics language, to three-dimensional representation and rendering algorithms, and to stereographic displays of atmospheric data. (This latter session proved to be very interesting to us for reasons having little to do with computer graphics. The materials chosen for displays represented conditions existing in the Omaha, Nebraska, area—sixty miles away from our homes—when the 1975 tornado struck that area.)

Thursday-afternoon sessions were oriented toward rather specialized areas of computer graphics:

- Computer Graphics and Television
- Animation
- CAD/CAM
- User Views of CAD/CAM

Recent uses of computer graphics in television were discussed, including a presentation by ABC Sports on their use during the Winter Olympics. The CAD/CAM sessions included reports on graphics used in planning electrical-distribution systems, ship-hull design, and graphics at the Ford Motor Company. There was also a panel discussion addressing productivity gains and expectations achieved through the use of CAD/CAM systems.

Friday's sessions included discussions of graphics standards, human factors (more), and raster techniques. The question of graphics standards is of particular importance to those who regularly attempt to transport graphics programs or systems from one computing environment to another. While other areas of computing developed standards long ago (eg: COBOL, FORTRAN, Pascal, etc), the graphics area had not attempted such a feat until quite recently. This has all begun to change, thanks to the work of the SIGGRAPH CORE standards committee.

The human-factors presentations included discussions on color and how it is perceived by the human eye, and on a prototype voice- and gesture-input interface being developed at MIT. An afternoon session on raster-graphics techniques completed the conference program.

Perhaps the only negative criticism we offer concerns the famous SIGGRAPH film festival. This has become an annual event since its informal inception, at the first SIGGRAPH conference, on the balcony of one participant's dormitory room at the University of Colorado in Boulder. This year's film festival was held in a hotel ballroom designed to hold no more than 1500 people. With 1900 people packed into the crowded space, and lines waiting to get in, the hotel's management restricted access to the ballroom for safety reasons. A greatly abbreviated second showing left many participants frustrated. The film festival is a forum for some of the best computer graphics and animation produced during the preceding year and is always enlightening and well attended. We sincerely hope next year's conference committee takes the film festival's popularity into consideration during planning.

The Exhibition

Although this was the seventh annual SIGGRAPH conference, it was only the fifth annual SIGGRAPH exhibition. There were ninety-nine vendors listed in the exhibition guide for SIGGRAPH '80. At SIGGRAPH '76 (the first exhibition), there were only ten. This says much about the growth of this part of the industry. Another indicator of growth, according to Ken Anderson of the *Anderson Report* (a newsletter devoted to computer graphics), is the fact that last year the computer-graphics industry reached $1 billion in delivered products. The computing industry as a whole does approximately $40 billion in delivered products per year.

Several vendors at the exhibition were of special interest to personal-computer users. ABW Corporation demonstrated its TEKSIM package. TEKSIM allows the Apple II user to access the Tektronix Plot-10 software. Although the Apple/TEKSIM combination offers only about one-fourth the resolution of a Tektronix terminal, advantages such as lower cost, color displays, selective erase, and standard video output are claimed by the vendor. Apple Computer Inc displayed both the Apple II and III computers. Calcomp, which most of us think of as a vendor for the large-host user, demonstrated its 1051 drum plotter (among other products). The Model 1051 is an RS-232C-compatible, relatively low-cost product, which, considering Calcomp's quality reputation and service organization, makes it a viable product for passive-graphics production on small systems.

Cromemco, with which most personal-computer users are familiar, brought its line of high- and medium-resolution graphics hardware to the exhibition. Recent

emphasis on efficient software designed to increase the productivity of the programmer and end user is evident in Cromemco's recently announced high-resolution graphics-software package. Digital Engineering, Inc, was present with its Retro-Graphics printed-circuit board. This transforms the Lear-Siegler ADM-3A terminal into a graphics terminal compatible with the Tektronix Plot-10 software package. This company also makes a cross-hair graphic-input cursor and a printer for the modified terminal. Houston Instruments, a division of Bausch & Lomb Corporation, displayed much of its pen-plotter line and its more recently developed electro-static plotter line.

An eight-color, eight-pen digital plotter was displayed by Soltec Corporation. This is an interesting approach to low-cost, multipen, passive graphics. The plotter is basically a single-pen plotter with "parking stalls" for additional pens and enough native intelligence to relocate each pen for changes in color and line weight, or for an optional cross-hair cursor for digitizing. Summagraphics exhibited its popular Bit-Pad One, a low-cost approach to graphic-data-entry problems.

Tektronix was present with nearly everything in its line of graphics terminals and its stand-alone 4050 series of desk-top graphics computers. Hewlett-Packard also displayed its line of desk-top graphics computers including the Model 9845C color machine. The space-shuttle image on this machine was very impressive.

Also present were vendors oriented toward heavy



Photo 1: *Megatek's new Wizzard color terminal. It also heralds the development of Megatek's device-independent software.*



Photo 2: *Overview of exhibition area. The Calcomp booth is in the center foreground. Tektronix is in the center mid-way back. IBM and Hewlett-Packard are in the center rear and Megatek is to the right in the foreground.*



Photo 3: *The Hewlett-Packard 9845C color desk-top computer is being demonstrated by using an image of the space shuttle.*

SAVE AT THE APPLE COMPUTER SUPERMARKET...

"COMPUTERS 'R' US"

UNBEATABLE MAIL ORDER DISCOUNTS
A SUBSIDIARY OF CONSUMER COMPUTERS

CHRISTMAS SUPER SALE

master charge
VISA

APPLE II PLUS
OR APPLE II STANDARD
16K FOR ONLY $925
48K FOR ONLY 1049
DISK II DRIVE $485
W/CONTROLLER
PASCAL SYSTEM $425

SEE PAGE 391
FOR MORE PRODUCTS AND ORDERING INFORMATION

OFFER EXPIRES DEC. 31 1980

ORDER TOLL FREE: 1-800-854-6654
CALIFORNIA, BACKORDER OR TECHNICAL INFO: (714) 698-8088
CREDIT CARD USERS PLEASE SEE ORDERING INSTRUCTIONS ON PAGE 391

graphics users. CAD/CAM applications by Computervision, Inc, were shown. IBM showed entries for all levels: the 3279 color terminal for low- to mid-level business-graphics users, the 3277 graphics-attachment feature for the mid-level engineering users, and the 3250 for CAD/CAM applications. Vector General and Adage featured their high-performance vector-display devices. Megatek, with a popular display booth, exhibited its new line of Wizzard graphics terminals.

With nearly 100 vendors displaying recent developments, it is not possible to describe all the new products. Suffice it to say that there was something for everyone at the exhibition. If too little information could be gleaned from vendor representatives at their display booths, many vendors also conducted forum sessions from morning until evening. Technical and management people were there to answer more detailed questions about their products.

There are three things we want to reemphasize as being significant in the computer-graphics industry:

- First, the continued development of lower-cost color graphics terminals—the user's capital expenditures are critical in justifying new approaches in problem solving.
- Second, an increased emphasis on graphics-software standards yielding greater productivity for software developers and end users.
- Finally, the beginning use of computer graphics by and for management, as opposed to its historically limited use as an engineering tool.

These items are very important to the growth of the computer-graphics industry. This exhibition, the conference, and the tutorials were dedicated to enhancing these three areas.

Harvey Kriloff and Robert Ellis, cochairmen of the SIGGRAPH '80 conference, and the SIGGRAPH '80 committee are to be commended for the quality of this year's conference. Next year's conference will be held in Dallas, Texas, and is scheduled for August 3 thru 7. Somehow we expect it to be hotter than the 75 degrees of Seattle. If present trends hold up, however, it will also be a fine and interesting conference. ■

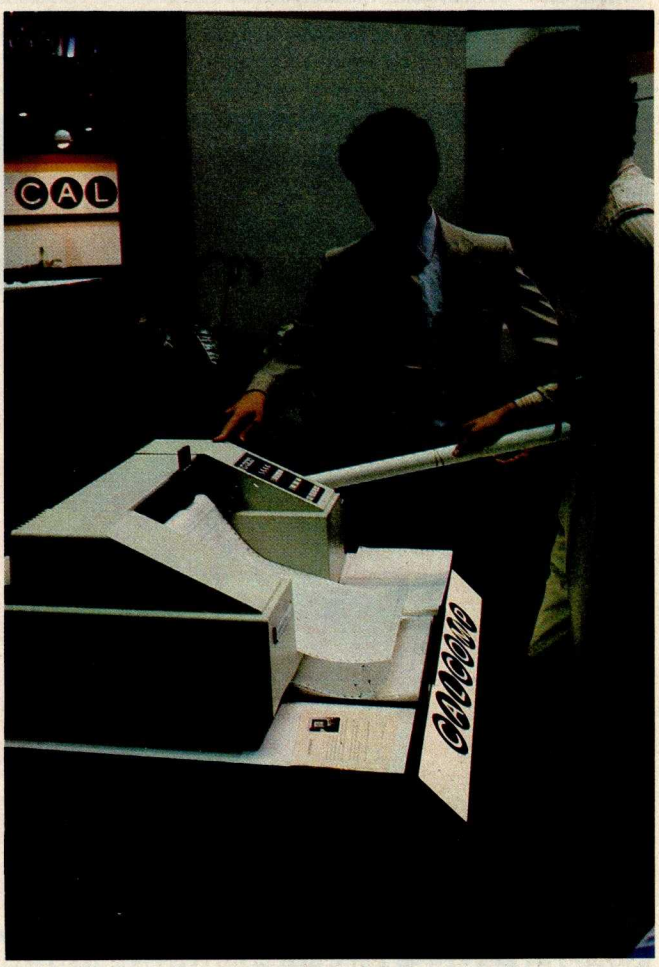


Photo 4: *A Calcomp representative demonstrates the Model 1051 digital plotter.*



Photo 5: *IBM's Model 3279 color-graphics terminal. This terminal is oriented toward business and management graphics rather than toward engineering applications.*

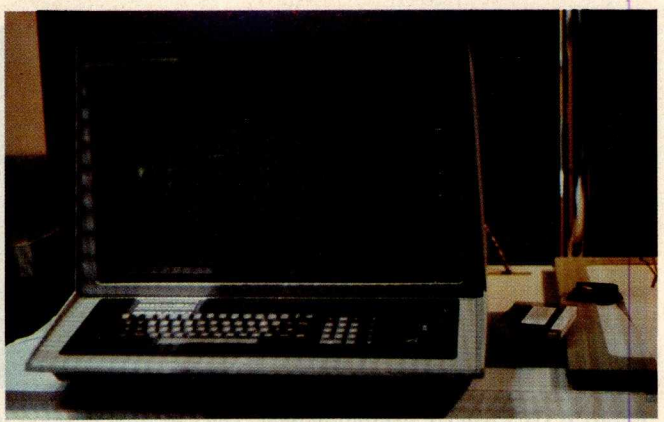




Photo 6: *The Tektronix Model 4054 features a large-screen storage display tube and built-in cartridge-tape drive, with disk drives optional.*

ΩMEGA SALES CO.

WHOLESALE COMPUTER PRICES DIRECT TO THE PUBLIC

12 Meeting St., Cumberland, R.I. 02864

Christmas Specials

When you buy:	You receive:	You receive:	When you buy:
 Atari 800 $749	1-8K plug in RAM Module FREE — ($124.95 value)	1 Box (10 Pcs) 8″ Diskettes FREE	 TRS•80 Model II - $3449
 Apple II 16K - $999 (Regular or Plus)	1 Apple Tape Recorder FREE — ($40 value)	Microsoft Basic for only $162.50	 INTERTEC SUPERBRAIN 32K RAM - $2449.00 64K RAM - $2649.00
 NEW! ATARI 825 PRINTER — $949	Atari Interface Module FREE — ($219.95 value)	Statistics Pak or Carrying case FREE — ($95 value each)	 HP-85 — $2899
APPLE II DISK with Controller — $495	FREE 1 Box (5 Pcs) Diskettes	EPSON MX-80 80 Character, 9x9 Dot Matrix Roll & Pin Feed Printer for your Apple, TRS-80 or Commodore $599	
NEC Spinwriter 5530 or 5510 $2449	SOROC IQ 120 $699	FREE Interface to Your Computer	
OKIDATA MICROLINE 80 — $529			

ΩMEGA OFFERS THE BEST DELIVERY AND PRICE ON:
APPLE • ATARI • TRS-80 MODEL II • INTERTEC •
T.I. 810 • HEWLETT-PACKARD-85 • SOROC •
COMMODORE • NEC • QUME • CENTRONICS

ΩMEGA sells only factory fresh, top quality merchandise to out customers.
ΩMEGA will try to match any current advertised price with similar purchase conditions.
Before you buy anywhere else — be sure to call ΩMEGA Sales Co.

1-401-722-1027


ΩMEGA ships via UPS, truck or air. COD's, VISA, Mastercharge accepted.
"A member in good standing of the Better Business Bureau."

We carry a complete line of the above equipment. For information and further pricing call:

TOLL FREE

1-800-556-7586

TELEX: 952106

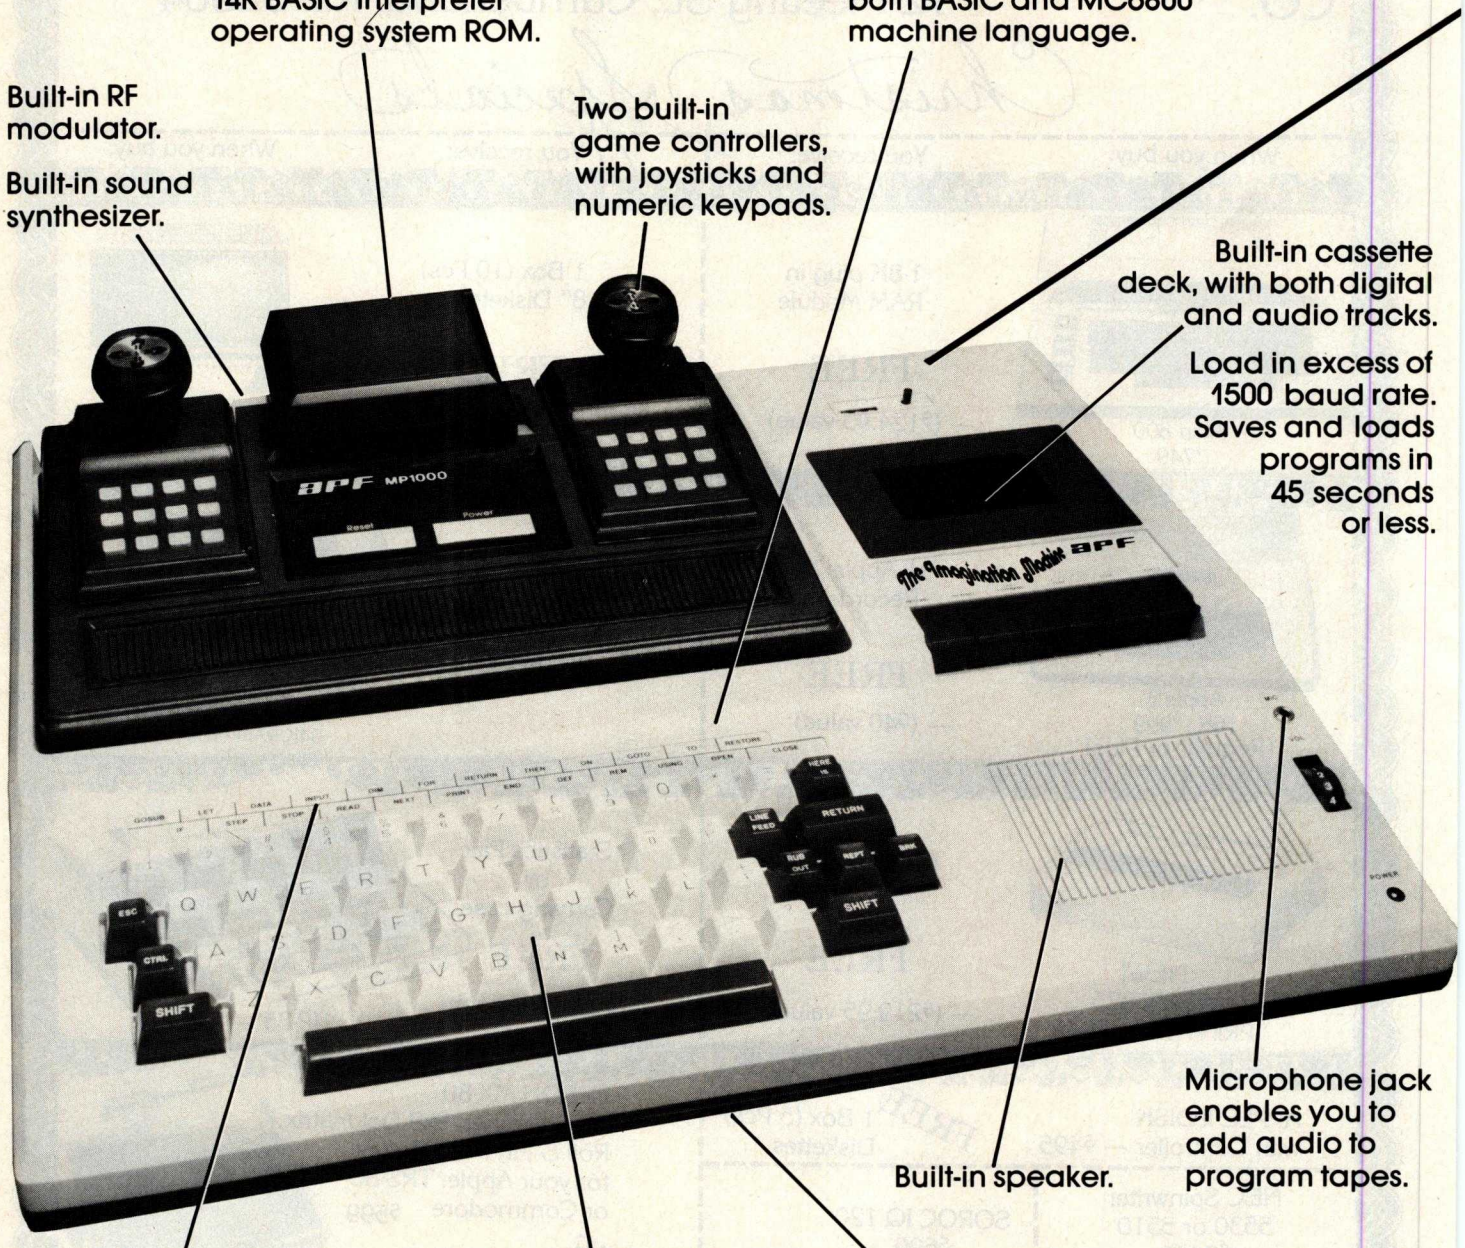
9K RAM (8K user available), 14K BASIC interpreter operating system ROM.
User-programmable, in both BASIC and MC6800 machine language.
Built-in RF modulator.
Built-in sound synthesizer.
Two built-in game controllers, with joysticks and numeric keypads.
Built-in cassette deck, with both digital and audio tracks.
Load in excess of 1500 baud rate. Saves and loads programs in 45 seconds or less.
BPF MP1000
Reset
Power
The Imagination Machine BPF
Microphone jack enables you to add audio to program tapes.
Built-in speaker.
Keyword shift plate.
Full, standard, 53-key typewriter keyboard.
High resolution picture on your TV screen, in 8 colors.
256 x 192 graphics mode.

All that computer for $599.

The Imagination Machine, the personal computer from APF Electronics.

The Imagination Machine is more personal computer than you'd expect at $599.

The Imagination Machine is a superbly designed, expandable, user-programmable computer system... at $599.

No other personal computer on the market can touch it, at that price.

Read what it brings you:

First of all, The Imagination Machine has 9K RAM and 14K BASIC-IN-ROM. A full 53-key professional, typewriter keyboard. A high-resolution picture on your TV set, in eight colors. Fast loading (1500+ baud rate), built-in dual-track cassette deck, for APF's digitally recorded tape programs. Built-in sound synthesizer. And, even a built-in RF modulator, which is a $40 option on other computer systems.

All that, plus user-programmability.

We know sophisticated users aren't going to be satisfied forever using preprogrammed software. (Even though we offer a large library of educational, entertainment, home and business management programs.) So, we made The Imagination Machine user programmable, in both BASIC and MC6800 machine language. To simplify matters, we've just developed the first and only BASIC TUTOR course on cassette. With it, you can learn to program The Imagination Machine in BASIC, with hands-on training, right at the computer.

Some exceptional features.

The Imagination Machine has several unique features that can help you use your time at the computer more effectively.

For example, it stores programs **and** data on the same cassette tape. (With other computers, you have to read programs from one tape into the computer, remove the tape, put in another tape and store your data on the new tape.)

Another special feature is The Imagination Machine's unique keyword system, which simplifies BASIC programming. The machine has 24 different programs statements and commands printed at the top of the keyboard. You can enter these 24 into your program without retyping them every time you use them. Instead of typing out "PRINT," for example, you just press two keys and the word appears on the screen. The system helps prevent typing errors and can speed up entering programs.

A third feature is Timed Response Monitoring, which automatically adjusts the computer's pace and level to your own. It makes "tutoring programs," for instance, easier and more interesting to follow.

And then there are The Imagination Machine's three graphic display modes: 1. Alpha numerics, mixed with low-resolution graphics in as many as eight colors. 2. High resolution — up to eight colors — 128 x 192 display. 3. High resolution graphics — up to four colors — with 256 x 192 display.

And expandability.

A personal computer that can't grow along with your growing requirements soon becomes obsolete. So, we designed The Imagination Machine to be expandable. By adding APF's optional "Expansion Box" and interface cartridges, you can hook up any compatible floppy disk or printer, or an additional 8K RAM memory cartridge.

Full mini-floppy system $995.



For small business and professional use, you may require a full mini-floppy system. In that case, order APF's System II. It includes The Imagination Machine, the "Expansion Box," floppy disk interface and 72K-byte, mini-floppy disk drive. All for just $995! No one can come close to that price.

You can't beat our prices or our guarantee.

If you can find a better personal computer system for the money, let us know. In the meantime, we stand by our statement: There is no other personal computer on the market that offers so much for so little. And if you order now, we'll even include our $19.95 APF Technical Reference Manual, with complete schematics, absolutely free.

Order The Imagination Machine directly from APF Electronics, with the assurance that if you are not completely satisfied, you can return it within 30 days of purchase for a complete refund. To order, or to learn the name of the dealer nearest you, call TOLL FREE 1-800-223-1264. New York residents call 212-869-1960. MasterCard and VISA accepted.

Price list:

System I, The Imagination Machine.	$599.
System II, Mini-floppy System (Includes The Imagination Machine, BB-2, and Mini-floppy Disk Drive).	$995.
BB-1. Expansion Box with RS232 cartridge.	$199.95
BB-2. Expansion Box with floppy disk interface cartridge.	$199.95
8K RAM memory cartridge.	$ 99.95
RS232 cartridge.	$149.95
Floppy-disk interface cartridge.	$149.95
Mini-floppy Disk Drive.	$399.95

$599. Manufacturer's suggested retail price.

APF electronics inc.
1501 Broadway New York, NY 10036

Circle 107 on inquiry card.

A Simplified Theory of Video Graphics

Part 1

Allen Watson III
1261 Robbia Ct
Sunnyvale CA 94087

This is an interesting time for choosing a personal computer, especially if you are looking for one with a graphics display. As you can see from the summary of specifications in table 1, the available graphics capabilities of the personal computers are all different, and no one model has a clear advantage over all the others. To make your choice even more difficult, some models exhibit undocumented quirks that are not apparent from the specifications.

Your choice of a video-graphics system will depend on what you want to do with graphics and on the performance of the different computers. While I can't help with the first aspect of your decision, I may be able to help you understand system performance by explaining the operating principles of video displays and describing the various combinations of features available on popular personal computers.

The Importance of Video Graphics

Many applications of personal computers are modeled on conventional practices that have been developed over a period of several years, while graphics displays have been too expensive for general use until quite recently. Many existing computer programs do not use even the simplest graphics, although there are several notable exceptions, such as chess games that use high-resolution graphics to display the board and pieces, and music editors that display standard musical notation.

Here's the important point: computer-graphics displays can produce schematic diagrams, music scores, flowcharts, architectural drawings, and the like that are much easier for the person using the computer to understand than the unadorned columns of numbers that are usually associated with computers. Of course, you still might not be able to afford video-graphics displays as powerful as the one used by NASA to simulate the view seen by the pilot of the space shuttle during its return from orbit. Even though they have their limitations, the current small-computer displays will enable you to do a lot of interesting things.

Raster-Scan Video

While there are several different ways of displaying information on a video screen, all of the personal computers presently available use the same kind of *raster-scan* technique that ordinary television does. We'll take a look at the basic features of this technique, since they are shared by all inexpensive video displays.

Television is an imperfect compromise among several factors:

- resolution, which determines how much detail we can display
- frame rate (to be discussed later), which is the number of complete pictures transmitted in 1 second
- bandwidth, a measure of the frequency response, of the equipment involved

An increase either in resolution or in frame rate requires an increase in bandwidth, which adds to the cost of the equipment. If we must keep within a limited bandwidth, we can obtain better resolution only at the expense of jerkier motion and vice versa. There is a type of television called *slow-scan*, for example, that manages to transmit reasonably detailed images over the narrow-bandwidth channels used by amateur radio operators, but the resulting frame rate is so low that the illusion of motion is lost. We will see how much bandwidth is necessary for ordinary television after we look at the raster-scan process itself.

If we display a sequence of images that change only slightly from one to the next, and do it fast enough, the eye will not be able to separate them: *persistence of vision* will cause the separate images to fuse into a "moving" picture. In order to transmit such a sequence of images electronically, each image must be dissected into a series of dots that may be transmitted one at a time. The television camera does this by rapidly scanning the image in a series of horizontal lines which form a *raster*. The lines are scanned one after another in the same way that a person scans the lines of letters on a printed page. Reading is a process of converting information,

About the Author

Allen Watson III began writing FORTRAN programs for scientific analysis soon after receiving his bachelor's degree in mathematics. Later, as a full-time programmer, he wrote IBM System/360 assembly-language programs for the computer-aided design of calculators and has prepared and presented training courses about the Fairchild F-8 and Motorola 6800. Allen is currently writing and editing user manuals for Apple computers.


Start learning and computing for only $129.95 with a Netronics 8085-based computer kit. Then expand it in low-cost steps to a business/development system with 64k or more RAM, 8" floppy disk drives, hard disks and multi-terminal I/O.

THE NEW EXPLORER/85 SYSTEM

Special! *Full 8" floppy, 64k system for less than the price of a mini! Only* **$1499.95!**

(Also available wired & tested, $1799.95)


Imagine — for only $129.95 you can own the starting level of Explorer/85, a computer that's expandable into full business/development capabilities — a computer that can be your beginner system, an OEM controller, or an IBM-formatted 8" disk small business system. From the first day you own Explorer/85, you begin computing on a significant level, and applying principles discussed in leading computer magazines. Explorer/85 features the advanced Intel 8085 cpu, which is 100% compatible with the older 8080A. It offers on-board S-100 bus expansion, Microsoft BASIC in ROM, plus instant conversion to mass storage disk memory with standard IBM-formatted 8" disks. All for only $129.95, plus the cost of power supply, keyboard/terminal and RF modulator if you don't have them (see our remarkable prices below for these and other accessories). With a Hex Keypad/display front panel, Level "A" can be programmed with no need for a terminal, ideal for a controller, OEM, or a real low-cost start.



Level "A" is a complete operating system, perfect for beginners, hobbyists, industrial controller use. $129.95



Full 8" disk system for less than the price of a mini (shown with Netronics Explorer/85 computer and new terminal). System features floppy drive from Control Data Corp., world's largest maker of memory storage systems (not a hobby brand!)



Level "A" With Hex Keypad/Display.

LEVEL "A" SPECIFICATIONS

Explorer/85's Level "A" system features the advanced Intel 8085 cpu, an 8355 ROM with 2k deluxe monitor/operating system, and an advanced 8155 RAM I/O . . . all on a single motherboard with room for RAM/ROM/PROM/EPROM and S-100 expansion, plus generous prototyping space.

PC Board: Glass epoxy, plated through holes with solder mask. • **I/O:** Provisions for 25-pin (DB25) connector for terminal serial I/O, which can also support a paper tape reader . . . cassette tape recorder input and output . . . cassette tape control output . . . LED output indicator on SOD (serial output) line . . . printer interface (less drivers) . . . total of four 8-bit plus one 6-bit I/O ports. • **Crystal Frequency:** 6.144 MHz. • **Control Switches:** Reset and user (RST 7.5) interrupt . . . additional provisions for RST 5.5, 6.5 and TRAP interrupts onboard. • **Counter/Timer:** Programmable, 14-bit binary. • **System RAM:** 256 bytes located at F800, ideal for smaller systems and for use as an isolated stack area in expanded systems . . . RAM expandable to 64K via S-100 bus or 4k on motherboard.

System Monitor (Terminal Version): 2k bytes of deluxe system monitor ROM located at F000, leaving 0000 free for user RAM/ROM. Features include tape load with labeling . . . examine/change contents of memory . . . insert data . . . warm start . . . examine and change all registers . . . single step with register display at each break point, a debugging/training feature . . . go to execution address . . . move blocks of memory from one location to another . . . fill blocks of memory with a constant . . . display blocks of memory . . . automatic baud rate selection to 9600 baud . . . variable display line length control (1-255 characters/line) . . . channelized I/O monitor routine with 8-bit parallel output for high-speed printer . . . serial console in and console out channel so that monitor can communicate with I/O ports.

System Monitor (Hex Keypad/Display Version): Tape load with labeling . . . tape dump with labeling . . . examine/change contents of memory . . . insert data . . . warm start . . . examine and change all registers . . . single step with register display at each break point . . . go to execution address. Level "A" in this version makes a perfect controller for industrial applications, and is programmed using the Netronics Hex Keypad/Display. It is low cost, perfect for beginners.

HEX KEYPAD/DISPLAY SPECIFICATIONS


Calculator type keypad with 24 system-defined and 16 user-defined keys. Six digit calculator-type display, that displays full address plus data as well as register and status information.

LEVEL "B" SPECIFICATIONS

Level "B" provides the S-100 signals plus buffers/drivers to support up to six S-100 bus boards, and includes: address decoding for onboard 4k RAM expansion selectable in 4k blocks . . . address decoding for onboard 8k EPROM expansion selectable in 8k blocks . . . address and data bus drivers for onboard expansion . . . wait state generator (jumper selectable), to allow the use of slower memories . . . two separate 5 volt regulators.

LEVEL "C" SPECIFICATIONS

Level "C" expands Explorer/85's motherboard with a card cage, allowing you to plug up to six S-100 cards directly into the motherboard. Both cage and card are neatly contained inside Explorer's deluxe steel cabinet. Level "C" includes a sheet metal superstructure, a 5-card, gold plated S-100 extension PC board that plugs into the motherboard. Just add required number of S-100 connectors.



Explorer/85 With Level "C" Card Cage.

LEVEL "D" SPECIFICATIONS

Level "D" provides 4k of RAM, power supply regulation, filtering decoupling components and sockets to expand your Explorer/85 memory to 4k (plus the original 256 bytes located in the 8155A). The static RAM can be located anywhere from 0000 to EFFF in 4k blocks.

LEVEL "E" SPECIFICATIONS

Level "E" adds sockets for 8k of EPROM to use the popular Intel 2716 or the TI 2516. It includes all sockets, power supply regulator, heat sink, filtering and decoupling components. Sockets may also be used for 2k x 8 RAM IC's (allowing for up to 12k of onboard RAM).

DISK DRIVE SPECIFICATIONS

- 8" CONTROL DATA CORP. professional drive.
- LSI controller.
- Write protect.
- Single or double density.
- Data capacity: 401,016 bytes (SD), 802,032 bytes (DD), unformatted.
- Access time: 25ms (one track).

DISK CONTROLLER/ I/O BOARD SPECIFICATIONS

- Controls up to four 8" drives.
- 1771A LSI (SD) floppy disk controller.
- Onboard data separator (IBM compatible).
- 2 Serial I/O ports
- Autoboot to disk system when system reset.
- 2716 PROM socket included for use in custom applications.
- Onboard crystal controlled.
- Onboard I/O baud rate generators to 9600 baud.
- Double-sided PC board (glass epoxy.)

DISK DRIVE CABINET/POWER SUPPLY

- Deluxe steel cabinet with individual power supply for maximum reliability and stability.

ORDER A COORDINATED EXPLORER/85 APPLICATIONS PAK!

Beginner's Pak (Save $26.00!) — Buy Level "A" (Terminal Version) with Monitor Source Listing and AP-1 5-amp Power Supply: (regular price $199.95), now at SPECIAL PRICE: **$169.95** plus post. & insur.

Experimenter's Pak II (Save $53.40!) — Buy Level "A" (Hex Keypad/Display Version) with Hex Keypad/Display, Intel 8085 User Manual, Level "A" Hex Monitor Source Listing, and AP-1 5-amp Power Supply: (regular price $279.35), all at SPECIAL PRICE: **$219.95** plus post. & insur.

Special Microsoft BASIC Pak (Save $103.00!) — Includes Level "A" (Terminal Version), Level "B", Level "D" (4k RAM), Level "E", 8k Microsoft in ROM, Intel 8085 User Manual, Level "A" Monitor Source Listing, and AP-1 5-amp Power Supply: (regular price $439.70), now yours at SPECIAL PRICE: **$329.95** plus post. & insur.

ADD A TERMINAL WITH CABINET, GET A FREE RF MODULATOR: Save over $114 at this SPECIAL PRICE: **$499.95** plus post. & insur.

Special 8" Disk Edition Explorer/85 (Save over $104!) — Includes disk-version Level "A", Level "B", two S-100 connectors and brackets, disk controller, 64k RAM, AP-1 5-amp power supply, Explorer/85 deluxe steel cabinet, cabinet fan, 8" SD/DD disk drive from famous CONTROL DATA CORP. (not a hobby brand!), drive cabinet with power supply, and drive cable set-up for two drives. This package includes everything but terminal and printers (see coupon for them). Regular price $1630.30, all yours in kit at SPECIAL PRICE: **$1499.95** plus post. & insur. Wired and tested, only **$1799.95.**

Special! Complete Business Software Pak (Save $625.00!) — Includes CP/M 2.0, Microsoft BASIC, General Ledger, Accounts Receivable, Accounts Payable, Payroll Package: (regular price $1325), yours now at SPECIAL PRICE: **$699.95.**

Please send the items checked below:

- ☐ **Explorer/85 Level "A" kit** (Terminal Version) . . . **$129.95** plus $3 post. & insur.
- ☐ **Explorer/85 Level "A" kit** (Hex Keypad/Display Version) . . . **$129.95** plus $3 post. & insur.
- ☐ **8k Microsoft BASIC** on cassette tape. **$64.95** postpaid.
- ☐ **8k Microsoft BASIC in ROM kit** (requires Levels "B", "D" and "E") . . . **$99.95** plus $2 post. & insur.
- ☐ **Level "B" (S-100) kit** . . . **$49.95** plus $2 post. & insur.
- ☐ **Level "C" (S-100 6-card expander) kit** . . . **$39.95** plus $2 post. & insur.
- ☐ **Level "D" (4k RAM) kit** . . . **$69.95** plus $2 post. & insur.
- ☐ **Level "E" (EPROM/ROM) kit** . . . **$5.95** plus 50¢ p&h.
- ☐ **Deluxe Steel Cabinet** for Explorer/85 . . . **$49.95** plus $3 post. & insur.
  - ☐ Fan For Cabinet . . . **$15.00** plus $1.50 post. & insur.
- ☐ **ASCII Keyboard/Computer Terminal kit:** features a full 128 character set, u&l case; full cursor control; 75 ohm video output; convertible to baudot output; selectable baud rate, RS232-C or 20 ma. I/O, 32 or 64 character by 16 line formats, and can be used with either a CRT monitor or a TV set (if you have an RF modulator) . . . **$149.95** plus $3.00 post. & insur.
  - ☐ **DeLuxe Steel Cabinet** for ASCII keyboard/terminal . . . **$19.95** plus $2.50 post. & insur.
- ☐ **New! Terminal/Monitor:** (See photo) Same features as above, except 12" monitor with keyboard and terminal is in deluxe single cabinet; kit . . . **$399.95** plus $7 post. & insur.
- ☐ **Hazeltine terminals:** Our prices too low to quote — **CALL US**
- ☐ **Lear-Sigler terminals/printers:** Our prices too low to quote: **CALL US**
- ☐ **Hex Keypad/Display kit** . . . **$69.95** plus $2 post. & insur.
- ☐ **AP-1 Power Supply Kit** ±8V @ 5 amps) in deluxe steel cabinet . . . **$39.95** plus $2 post. & insur.
- ☐ **Gold Plated S-100 Bus Connectors** . . . **$4.85** each, postpaid.
- ☐ **RF Modulator kit** (allows you to use your TV set as a monitor) . . . $8.95 **postpaid.**
- ☐ **16k RAM kit** (S-100 board expands to 64k) . . . **$199.95** plus $2 post. & insur.
- ☐ **32k RAM kit** . . . **$299.95** plus $2 post. & insur.
- ☐ **48k RAM kit** . . . **$399.95** plus $2 post. & insur.
- ☐ **64k RAM kit** . . . **$499.95** plus $2 post. & insur.
- ☐ **16k RAM Expansion kit** (to expand any of the above in 16k blocks up to 64k) . . . **$99.95** plus $2 post. & insur. each.
- ☐ **Intel 8085 cpu Users' Manual** . . . **$7.50** postpaid.
- ☐ **12" Video Monitor** (10MHz bandwidth) . . . **$139.95** plus $5 post. & insur.
- ☐ **Beginner's Pak** (see above) **$169.95** plus $4 post. & insur.
- ☐ **Experimenter's Pak** (see above) . . . **$219.95** plus $6 post. & insur.
- ☐ **Special Microsoft BASIC Pak Without Terminal** (see above) . . . **$329.95** plus $7 post. & insur.
- ☐ Same as above, plus **ASCII Keyboard Terminal With Cabinet, Get Free RF Modulator** (see above) . . . **$499.95** plus $10 post. & insur.
- ☐ **Special 8" Disk Edition Explorer/85** (see above) . . . **$1499.95** plus $26 post. & insur.
  - ☐ **Wired & Tested** . . . **$1799.95** plus $26 post. & insur.
- ☐ **Extra 8" CDC Floppy Drives** . . . **$499.95** plus $12 post. & insur.
  - ☐ **Cabinet & Power Supply For Drive** . . . **$69.95** plus $3 post. & insur.
- ☐ **Drive Cable Set-up For Two Drives** . . . **$25** plus $1.50 post. & insur.
- ☐ **Disk Controller Board With I/O Ports** . . . **$199.95** plus $2 post. & insur.
- ☐ **Special: Complete Business Software Pak** (see above) . . . **$699.96** postpaid.
  SOLD SEPARATELY:
  - ☐ **CP/M 1.4** . . . **$100** postpaid.
  - ☐ **CP/M 2.0** . . . **$150** postpaid.
  - ☐ **Microsoft BASIC** . . . **$325** postpaid.
- ☐ **Intel 8085 cpu User Manual** . . . $7.50 **postpaid.**
- ☐ **Level "A" Monitor Source Listing** . . . **$25** postpaid.

Continental U.S.A. Credit Card Buyers Outside Connecticut

CALL TOLL FREE: 800-243-7428

To Order From Connecticut Or For Technical Assistance, call (203) 354-9375

Total Enclosed (Conn res. add sales tax) $ _____

Paid By:

☐ Personal Check ☐ Cashier's Check/Money Order

☐ **VISA** ☐ **Master Charge** (Bank No. _ _ _ _)

Acct. No. _____ Exp. Date _____

Signature _____

Print Name _____

Address _____

City _____

State _____ Zip _____

NETRONICS Research & Development Ltd.
333 Litchfield Road, New Milford, CT 06776

Circle 109 on inquiry card.

CP/M® SOFTWARE

8080 Emulator

RAID is a software-based system rivaling hardware emulators costing thousands of dollars. RAID is absolutely the most advanced and sophisticated debugging system ever developed for a computer. Fully symbolic, including labels, operands and op-code mnemonics, RAID combines real-time and emulation modes in a single package. Tracing by *prime path, individual instructions, subroutines* and *breakpoints* is supported. Special feature allows emulation and real-time modes to function together for high speed emulations. Other features include memory search facilities, disk access by track and sector, single-step, multi-step, block move, user-selectable radix, etc. Over 70 commands in all. Requires 24K min. CP/M®[2] system.

Raid **$250**
Manual only ..... **$ 25**

ISIS[1] Conversion

ISIS[1] to CP/M® conversion utilities permit CP/M® users to read or write files to or from an ISIS[1] diskette. The package consists of three utility programs that *read, write* and display the ISIS[1] *directory*.

ISIS[1] - CP/M® Utilities **$250**
Manual only ..... **$ 5**

Floating Point Package

'FPP' is a set of 8080 assembly language subroutines that provide 12 digit BCD arithmetic functions for *add, subtract, multiply,* and *divide*. BCD arithmetic means no conversion errors and minimal conversion time. Source code is supplied on standard 8" diskette.

FPP on CP/M® diskette **$200**
FPP on ISIS[1] diskette **$200**
Manual only ..... **$ 10**

[1]ISIS is a trademark of Intel Corporation.
[2]CP/M® is a registered trademark of Digital Research.

SOUTHERN COMPUTER SYSTEMS, Inc.

586 Shades Crest Road
Birmingham, Al.

Send check or money order to:
P.O. Box 3373 A
Birmingham, Al. 35205
Phone: 205 933-1659

Computer Model	Text: Lines by Characters	Graphics: Method	Resolution	Aspect Ratio	Color: No. of	Method
Apple II	24 by 40	Subcell	40 by 48	4:3	16	NTSC
		Mapping	280 by 192	4:3	6	NTSC
Atari 400 and 800	24 by 40	Subcell	160 by 80	8:5	16	NTSC
		Mapping	280 by 192	4:3	4	NTSC
Commodore PET	25 by 40	Special	320 by 200	4:3	--	----
Compucolor II	32 by 64	Subcell	128 by 128	4:3	8	R-G-B
Exidy Sorcerer	30 by 64	Special	512 by 240	4:3	--	----
Radio Shack TRS-80	16 by 64	Subcell	128 by 48	4:3	--	----
Texas Instruments TI-99/4	24 by 32	Special	256 by 192	4:3	16	NTSC

Table 1: *A summary of some of the features available in personal computer displays. The graphics capabilities of available personal computers differ, and no one model seems to have a clear advantage. NTSC (National Television System Committee) indicates that American-standard color-video conventions are used. R-G-B indicates that separate red, green, and blue video signals are sent to the monitor.*

which is actually all present on the page simultaneously, into a sequence of words that follow one another in time. In a similar fashion, the raster-scan process converts a picture into a sequence of rapidly changing signal levels which represent the brightness of successive points on each scanning line.

When this rapidly changing signal is picked up by a television-receiving set, it is converted back into a visible raster on the screen of the picture tube. The neck of the picture tube contains an *electron gun* that projects a beam of electrons onto a thin layer of phosphor on the inside of the screen. Wherever the electron beam strikes the phosphor it produces a spot of light whose brightness depends on the intensity of the signal being received.

If the electron beam is swept across the screen so that the spot of light is always in the same relative position as the scanning dot in the camera, the picture will be recreated on the screen. The circuits in the television set controlling the position of the beam must be able to keep in step with the camera, so the picture information is interrupted for a short time at the end of each line (and for a longer time at the end of each frame). During these intervals the signal is changed to an intensity level that is never used for picture information, thus creating *synchronization pulses* that the television circuits can distinguish from the picture signal.

In this country, the repetition rate for the picture-scanning process was set at 60 scans per second so that interference from the 60 Hz AC power line will be synchronized; that is, any visible interference effect will stand still on the screen and be less noticeable than it would be if it were moving. Scanning the entire picture 60 times per second amounts to a lot of information per unit of time, and thus requires a very wide bandwidth. The television designers discovered that they could cut the bandwidth requirement in half by making the camera scan every other line during alternate scanning cycles called *fields*. Two successive fields cover all the lines in the raster 30 times each second, to make a *frame*. (See figure 1.) Since the lines of the two alternate fields mesh between each other, this technique is called *interlaced scanning*.

This seems like a rather complicated way of getting 30 frames per second, and you may be wondering whether television wouldn't work just as well with a straightforward scan of the entire raster, 30 times per second. This concept is fine as far as the 60 Hz power-line interference is concerned, but 30 frames per second is too slow for the human eye to merge the image into a continuous picture without noticeable flicker. If you are familiar with filmed motion pictures, you know that they are projected at only 24 frames per second, but a shutter interrupts each frame so that the effective flicker rate is actually 48 frames per second, fast enough for motion to appear continuous.

There are other factors which also

Circle 110 on inquiry card. →


Data Terminals From MICROMAIL? YES,

Because We Offer....

...A 'Personal Approach'
Towards the Quick and Efficient Handling of Your Individual Order.

...Inventory.
The Equipment You Select is Readily Available from Our Stock.

...Terminals Only.
We Specialize in Data Terminal Equipment.



DIABLO 630

- Uses metalized or plastic print wheels.
- Automatic bi-directional printing.
- Maximum print speed is 40 characters/second.
- Variable column spacing, 120 positions/inch.
- Variable line spacing, 48 positions/inch.
- Forms control; bi-direcitonal paper feed; horizontal and vertical tabs; left, right, top and bottom margins.

$1999.00

Optional Forms Tractor — **$200.00**

DIABLO 1650

- Prints at 40 cps, using 88, 92, or 96 char. metalized printwheels.
- Vertical resolution 1/48". Horizontal 1/120". Capable of proportional spacing, bidirectional printing, and graphics under software control.
- Bidirectional normal and direct tabs. Left, right, top and bottom margins.

R.O. $2890.00
KSR $3155.00

DIABLO 1640

- Uses plastic printwheel and prints at 45 cps. Otherwise, shares identical features with 1650 including:
  - Friction or tractor feed, up to 15" wide.
  - Cartridge ribbon, fabric or carbon.

R.O. $2745.00
KSR $3050.00

T.I. 810

- Includes upper/lower case option.
- Bidirectional printing at 150 cps.
- Tractor-feed forms, 3" to 15" wide.

$1599.00

Options:
- Forms length control — $100.00
- Vertical Format Control with Compressed Print — $125.00



DECwriter LA 34

(Shown with optional forms tractor and numeric keypad).

- Prints 10, 12, 13.2, or 16.5 characters per inch, upper/lower case.
- 2, 3, 4, 6, 8, or 12 lines per inch.
- Friction feed, paper width to 15 inches.

$969.00

Options:
- Numeric keypad — $80.00
- Adjustable forms tractor — $130.00

NEW


Model 'AA' $1,099.00



ANADEX DP-9500/9501

- High Density Graphics
- Parallel, RS-232C, and Current Loop interfaces standard.
- Double width printing
- 132/175 or 132/220 columns.
- 50 to 220+ lines/min., 150/200 CPS 9 x 7/7 x 9 font or 120/200 CPS with 11 x 9/7 x 9 font.
- 9-wire print head, 650 million character life.
- Bi-Directional printing with shortest distance sensing logic.
- Adjustable width tractor paper feed.

Call For Low Price



SOROC IQ 120

- Displays 80 x 24, upper/lower case.
- Separate numeric keypad and cursor keys.
- Protected fields displayed at reduced intensity.


$689.00



SOROC IQ 140

- 117-key detachable keyboard with numeric cluster and cursor control.
- Insert/delete line, insert/delete character.
- Underline, blink, reverse, ½ intensity, protected and blank fields.
- Printer port with independent baud rate — prints line, partial or full screen.

$1099.00



TELEVIDEO 912/920

- Insert/delete line, insert/delete character, line/page erase.
- Reverse video, blinking, underline, ½ intensity, protected field, blank security field.
- Uses 7 x 10 dot matrix for a high quality u/l case display with descenders.
- Standard typewriter or teletype keyboard; numeric keypad.
- Model 920 includes 17 dedicated keys for function and editing.
- Block or character transmission, auxiliary printer port.
- Cursor up, down, left, right return, home, load, read, tab and back tab.

Call For Low Price



TELETYPE 43

- Prints 132 columns, upper/lower case with true descenders.
- 30 character/second print speed. 110-300 baud.
- Uses 12" wide by 8.5" pinfeed paper.
- Print position scale, paper guide and supply rack.

$999.00

MICROMAIL™
MICROMAIL • BOX 3297 • SANTA ANA, CA 92703
(714) 731-4338

Write or Call In for Our Free Catalogue!

TO ORDER: Send check or money order to: **MICROMAIL, P.O. Box 3297, Santa Ana, CA 92703.** Personal or company checks require two weeks to clear. All equipment includes factory warranty.

SHIPPING: We ship freight collect by UPS when possible. Larger terminals are shipped by motor freight. Air and express delivery is available on all products.

HANDLING: All orders are subject to MICROMAIL's handling charges. Less than $750.00, add 3%. $750.00 to $2,000.00, add 2%. Over $2,000.00, add 1%.

Circle 111 on inquiry card.

CIRCLE COMPUTER SALES

Discount computer brokers
Northern California's Finest!

	List Price	Our Price
THINKERTOYS®		
Discus M26® 26 Megabyte Disk The best S100 Winchester disk system on the market	4995	4089
Discus® 2D Dbl Dens 8'' Floppy 600K bytes per drive	1199	999
Discus® 2 + 2 Dbl Side 8'' Floppy 1200K bytes per drive (All Thinkertoys disk systems include CP/M® at no charge)	1545	1299
Add-on Dbl-Dens 8'' Disk Drive	795	669
Add-on Dbl-Side 8'' Disk Drive	1195	999
Disk Jockey® 2D Controller	429	365
16K SuperRam® Static RAM	349	295
32K SuperRam® Static RAM	699	585
16K MemoryMaster Bank-Select	399	335
24K MemoryMaster Bank-Select	549	465
Switchboard Serial/Parallel I/O	259	217
DECISION IR Computer System		call
NORTH STAR COMPUTERS		
HORIZON® 2 Drive 32K D/D	3095	2537
HORIZON® 2 Drive 32K Quad	3595	2947
HDS-18 18-Megabyte Hard Disk	4999	4097
RAM32 32K Dynamic RAM	739	599
RAM16 16K Dynamic RAM	499	419
NorthStar Application Software		call
GODBOUT ELECTRONICS		
Z80 Processor - 4Mhz, POJ, EPROM, Interrupts	295	249
Dual Processor - 8085/8088 Ease into 16-bit processing	425	359
Econoram IIA 8K Static RAM . . . OLD RELIABLE	189	158
Econoram XIV 16K Static RAM	349	295
Econoram XX 32K Static RAM bank-select or extended addressing very low power . . a great buy	699	594
Interfacer I Dual Serial I/O A very flexible board Full RS232 handshaking	249	207
Interfacer II Serial/Parallel I/O	249	207
PRINTERS		
Diablo 630 - The low-cost DAISY These will be hard to get	2695	2395
NEC 5515 RO Serial Interface Diablo-compatible interface	2850	2499
USED ALPHA MICROS		Call
TERMINALS		
Hazeltine 1420	995	895
Hazeltine 1500	1225	1049
Televideo 920C	975	877
MEASUREMENT SYSTEMS		
DM6400 64K Dynamic RAM	895	657
DMB 64K Dynamic Bank-Select RAM Excellent reliability, low cost, low power . . . a good buy	1195	857
ALTOS		
ACS8000-2 64K Dbl-Dens, Sgl-Sided	4500	3995
ACS8000-5 64K DEMO . . . can upgrade to 4 users and hard disk	5990	4795
MICRO PRO		
Word Star	495	379
Super Sort	250	189
Data Star	350	269
Mail Merge (Requires Word Star)	150	119

Prices subject to change without notice. Delivery subject to availability.

Circle Computer Sales
700 Larkspur Landing Circle
Larkspur, CA 94939
415-461-2616

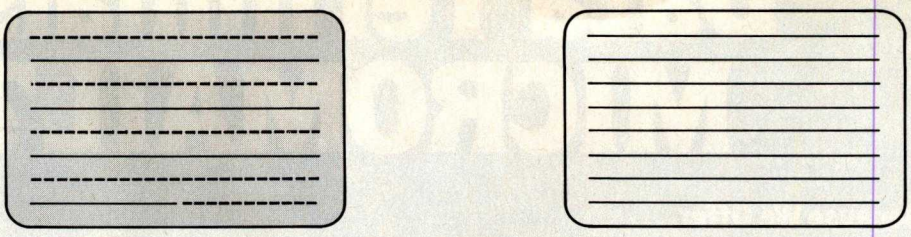


Figure 1: *A comparison of the interlaced (1a) and noninterlaced (1b) raster-scanning schemes. The standard home television receiver displays a picture made up of two alternating* fields, *each composed of 262½ lines. The lines are* interlaced *to produce a high-resolution picture that can be transmitted on a narrow bandwidth signal.*

complicate video-display timing. The *vertical-retrace interval* provides time for the television circuits to return the scanning dot to the top of the screen after each field has been completed. Since no picture information should be viewed during this time, the electron beam must be turned off or *blanked*: so, this time is also called the *vertical-blanking interval*.

A complete frame consists of two field scans and two vertical-retrace intervals. Television in the United States uses a total of 525 lines per frame or 262.5 lines per field. Each vertical retrace uses 21 lines, leaving 241.5 lines per field for the transmission of picture information. The odd half-line per field is necessary in order to make the lines of alternate fields interlace properly.

At 30 frames per second, 525 lines per frame is equivalent to 15,750 lines per second or 63.5 μs per line. Since all the lines are scanned in the same direction, the scanning dot must be returned across the screen between the end of one line and the start of the next. This is called *horizontal retrace* and takes about 15 μs.

Video Monitor Versus the Standard Receiver

So that the engineers at the television station can monitor the quality of the signal that is being transmitted, the picture is displayed on a *video monitor* (something like a television set without the antenna and tuner). It does not pick up other television broadcasts but is connected directly to the station equipment generating video signals. If the outgoing video signal already has the horizontal and vertical synchronizing pulses, it is called *composite video*. Most video monitors are also capable of accepting the video signals and synchronizing signals separately.

Because the monitor gets the signal before it has been through the various distortions imposed on it by the transmission and reception equipment, the picture displayed on a monitor is much sharper than the one on a home television set. The bandwidth of the video signal displayed by a home set is limited to less than 4.5 MHz, while most video monitors can handle 12 MHz or more.

Home television receivers display less of the picture in another respect: they crop off the edges by generating a raster which is too large for the screen. This deliberate *overscanning* is done so that the unavoidable errors in the positioning of the raster (caused by manufacturing tolerances and changes in the power-line voltage) will not leave unsightly gaps at the edges of the picture. In television broadcasting, no important activity is allowed to occur near the edges of the picture where it might be lost. Personal computers that use standard television receivers for their displays must have similar precautions: data is never displayed on the parts of lines near the sides of the screen, or anywhere on the top or bottom lines.


The television signal is transmitted over the air after it is impressed onto a VHF (very-high-frequency) or UHF (ultra-high-frequency) radio signal by *modulation*. Modulation is the modification of some characteristic of the VHF or UHF signal, or *carrier*, in step with the changes in the information that is being transmitted. The particular frequency used for the carrier determines which channel you tune your TV set to in order to pick it up. Circuits in the television can detect the changes in the carrier and extract the information they contain: specifically, the composite-video signal.

If we want to display our computer-generated video on an or-

SIRIUS 80+

High Performance Low Cost Floppy Add-Ons!

The SIRIUS SYSTEMS 80+ Series of Floppy Disk add-ons are designed to provide unmatched versatility and performance for your TRS-80*. Consisting of four different add-ons, there is a 80+ Series Floppy Disk Drive to meet your needs.



COMMON CHARACTERISTICS

- *5ms track-to-track access time*
- *Auto-Eject*
- *180 day WARRANTY*
- *Exceptional speed stability - 11/2%*
- *Single/Double Density operation*
- *Mix any or all 80+ Series on the SS Standard cable*

SPECIFIC CHARACTERISTICS

The **SIRIUS 80+1** -a single sided, 40 track Drive. Offering 5 more tracks than the Radio Shack model, it cost $120 less. Formatted data storage is 102K/204K Bytes Single/Double Density.
SIRIUS 80+1 ..... **$379.95**

The **SIRIUS 80+2** is a dual sided, 80 track (40 per side) Disk Drive. It appears to the TRS-80* as TWO 40 track drives yet **COST LESS THAN HALF THE PRICE!** Even greater savings result since data is recorded on both sides of the media instead of only a single side. This unit may require the SS Standard cable. Formatted data storage is 204K/408K Bytes Single/Double Density.
SIRIUS 80+2 ..... **$449.95**

The **SIRIUS 80+3** - a single sided, 80 track Drive. Offering 2⅓ times the storage of a standard Radio Shack Disk Drive, the 80+3 greatly reduces the need for diskettes correspondingly. Additionally, because of the increased storage and faster track-to-track access time, the 80+3 allows tremendously increased throughput for disk based programs! The 80+3 includes SIRIUS's TRAKS-PATCH on diskette (for use with 96 tpi drives). Formatted data storage is 204K/408K Bytes Single/Double Density.
SIRIUS 80+3 ..... **$499.95**

The **SIRIUS 80+4** -a dual sided, 160 track (80 per side) 5¼" monster! The ultimate in state-of-the-art 5¼" Floppy Disk Technology, the 80+4 is seen by the TRS-80* as two single sided disk drives. Thus, in terms of capacity, one 80+4 is equivalent to 4⅔ standard Radio Shack drives — at a savings of over 73% (not to mention diskettes!!!). (With a double density converter the available memory is huge!) The 80+4 (a 96 tpi drive) includes TRAKS-PATCH on diskette and may require the SS Standard cable. Formatted storage is 408K/816K Bytes Single/Double Density.
SIRIUS 80+4 ..... **$649.95**

All 80+ Series Floppy Disk add-ons operate at 5ms track-to-track but are Expansion Interface limited to 12ms for the TRS-80*

**TRS-80© of Tandy Corp.*


ACCESSORIES

SS Standard 2 Drive Cable **$29.95**
NEWDOS/80-Sophisticated Operating System for the TRS-80* from Apparat **$149.95**

Save up to 10% *with these SIRIUS Packages!*

NEWDOS/80, SIRIUS 80+3, and Two Drive Cable **$624.95**
NEWDOS/80, SIRIUS 80+4, and Two Drive Cable **$749.95**
NEWDOS/80, Two (2) SIRIUS 80+3's, Two Drive Cable **$1080.95**
NEWDOS/80, Two (2) SIRIUS 80+4's, Two Drive Cable **$1349.95**

PRIAM Hard Disks Now Available from SIRIUS SYSTEMS!



PRIAM's high-performance, low-cost Winchester disc drives speed up throughput and expand data storage from 20 megabytes to 154 megabytes. And a single controller can be used to operate 14-inch-disc drives with capacities of 33, 66, or 154 megabytes or floppy-disc-size drives holding 20 and 34 megabytes. So it's easy to move up in capacity, or reduce package size, without changing important system elements or performance.

- *Fast, Linear Voice Coil Positioning*
- *10 ms track-to-track positioning*
- *Fully servoed head positioning*
- *Dedicated servo tracks*
- *DC Power required only!*
- *Simple, parallel Interface*
- *Optional SMD Interface*
- *50 ms Average Positioning time*
- *90 ms Maximum Positioning Time*
- *6.4 ms Average Latency*

THE PRIAM LINEUP

Model/Disc Size	Capacity	Size	Weight	Price
DISKOS 3350 (14")	33Mbytes	7" × 17" × 20"	33 lbs.	$2995
DISKOS 6650 (14")	66 Mbytes	7" × 17" × 20"	33 lbs.	$3749
DISKOS 15450 (14")	154 Mbytes	7" × 17" × 20"	33 lbs.	$4695
DISKOS 2050 (8")	20 Mbytes	4.62" × 8.55" × 14.25"	20 lbs.	$2995
DISKOS 3450 (8")	34 Mbytes	4.62" × 8.55" × 14.25"	20 lbs.	$3745
DISKOS 1070	10.6 Mbytes	floppy-size	(low)	$2195

All PRIAM DISKOS Drives have a Transfer Rate of 1.03 Mbytes/Sec.
Optional SMD interface available for $150.

SIRIUS SYTEMS offer cases and enclosures for all PRIAM Hard Disk Drives. All 14" Winchester Drives will mount in our 14" Standard Case. The 8" Winchesters have two alternatives: a single drive case and a dual drive case. All SIRIUS SYSTEMS Winchester drive cases include Power Supply, internal cabling, switches, fan, extra AC outlet (not switched, but fused) and possess very adequate ventilation. Drive addressing is done on the rear of the Case and not on the drive iteself to provide ease of use during operation. All WINCHESTER DRIVE Cases are Warranted for a full year and come in our standard blue-black color scheme. Consult us for current availability and pricing.

Introducing the Versatile, Low-Cost OMEGA Series Controller

As new technological advances bring down the cost of fast, reliable mass data storage, the need for an inexpensive, versatile controller have become greater and greater. To meet this need, SIRIUS SYSTEMS' OMEGA Series Controller was designed.

The SIRIUS OMEGA Series Controller Module utilizes an **on-board microprocessor** to mediate data transfer to a wide variety of peripherals from an equally wide variety of host computer systems. Up to four Winchester Hard Disks (8" or 14"), four 5¼" Floppy Disks Drives and/or up to eight 8" Floppy Disk Drives may be **in use at one time.** Host systems interfacing is accomplished via a parallel or a serial interface. With the additon of a Personality module, the OMEGA Series Controller Module is directly **compatible with many popular computer systems** (among them the TRS-80*, Apple, Heath, and others). Provision is made for the addition of a streaming tape drive, also.

SPECIFIC HARDWARE FEATURES INCLUDE:

- *Control of up to twelve Floppy Disk Drives (eight 8" and/or four 5¼")*
  - *8" and/or 5¼" Disk Drive Utilization*
  - *Single (FM) or Double (MFM) density data storage*
  - *Hard or Soft sectored diskette usage*
  - *Utilization of "Quad" density (96 tpi) 8" or 5¼" Disk Drives*
- *Control of up to four WINCHESTER type PRIAM DISKOS Disk Drives*
  - *8" or 14" may intermix on the same cable*
  - *Accommodates 8" and/or 14" drives of 5.3Mbytes to 154Mbytes*
  - *Ultra-Fast data transfers*
- *Extremely flexible host-controller interfacing*

SPECIFIC SOFTWARE FEATURES INCLUDE:

- Dynamic format modifications via command words
- Extremely flexible format acceptance for unusual data storage formats
- Easily interfaces to standard operating systems (TRS-DOS*, CP/M®, etc)
- Operates in either get/put sector mode or data string mode
- Performance parameters may be changed by EPROM replacement or Dynaminic Reprogramming

CP/M™ of Digital Research

Dedicated systems cards are also available on a limited basis for the STD-BUS and the S 100. These cards feature shared memory also (again, software selectable) in addition to the regular OMEGA Series Controller Module features. Consult SIRIUS SYTEMS for current price and availability for the entire line of OMEGA Series Memory Units and Controllers. **Dealer inquiries are invited.**

What TFORTH is - and what it has to offer YOU!

TFORTH is a unique growth programming language for the TRS-80® that combines the best features of an interpreter and a compiler all in one functional easy-to-use package. TFORTH cannot be simply compared with Fortran, BASIC or PASCAL. This high speed, high level modular code offers the speed found in many FORTRAN compliers yet retains the on-line conviences found in BASIC INTERPRETERS by flagging input errors as they occur line-by-line. Unlike PASCAL, TFORTH needs no "run-time" package for support. Serving as an operating system, compiler, assembler, interpreter, virtual memory manager, all in one: TFORTH makes easy, efficient- structured re-entrant programs a natural consequence.

The key to TFORTH's flexibility and ease of use lies in its use of a stack for parameters and a unique dictionary for WORDS. These WORDS are stated in terms of other WORDS already defined in the dictionary. It is this rich set of WORDS that provides DO LOOPS, IF-THEN-ELSE statements, BEGIN-END statements, virtual memory, any number base (to base 32) for input or output, a macro assembler, re-entrant code, multithread dictionary, line editor, excellent math package (16 bit integers, double precision floating point, SIN, COS, TAN, EXP and LOG) and it runs under either TRSDOS* or NEWDOS. Assembler inherently nests with high level in an easy fashion. Complicated drivers for new devices take only a few lines of TFORTH which saves both memory and disk space!

TFORTH is a procedural language specifing a process rather than a desired result. The ability to have the language grow in the direction the user desires is excellent for novel applications. New data types and new processes can become part of the language. Due to the modular constructions, a very compact code is produced which executes at exceptionally high speeds between machine code and machine code plus 20% typical overhead speeds. Memory requirements can be "less" than assembler coding or other high level languages.

TFORTH comes complete for the TRS-80® with as little as 16K of memory and a single Disk Drive using either TRS-DOS® or NEWDOS. It provided on diskettes and an optional Math and Utilities package is available.

Through TFORTH an excellent way to develop new languages, provide simple control of device (including video monitors, A/D and D/A converters and burglar alarms) and to implement tasks requiring monitoring and decision is offered. Many WORDS to handle peripherals are part of basic TFORTH and others may be added easily. Often, substantial hardware development can be eliminated by using TFORTH to do the major digital or reduction of data.

For many applications a minimal task may be written in high level (or mixture of assembler and high level) code: loaded, assembled and prior to execution may be written to the disk as a ready to execute machine code/EXE module with the DOS.

TFORTH (on diskette - specify for Standard or 96 tpi Disk Drives) **$129.95**
TFORTH with the addition of TRAKS-PATCH (a powerful combination!) **$136.95**

STATE-OF-THE-ART DISK DRIVES

QUME® DataTrak 8

8" Disk Drive DOUBLE SIDED! DOUBLE DENSITY!

High performance Double Sided Disk 8" Disk Drive ■ Single or Double Density ■ Door Lock and Write Protect INCLUDED! ■ Negative DC Voltage not required ■ Low Power Operation

- *FAST! 3ms track-to-track access*
- *Low friction and minimum wear*
- *Superior Head Load Dynamics*

QUME DataTrak 8 ..... **$574.95 (2/$549 ea)**
QUME Technical Manual **$6.95**
Connector Set #3 (AC, DC, & Card Edge) **$10.95**
Connector Set #4 (AC and DC) **$2.95**

MPI 51/52 & 91/92 5¼" Disk Drives



- *Fast! 5ms track-to-track access*
- *Exclusive Pulley-Band Design*
- *Unique Door/Ejector Mechanism*
- *Reliable 11/2% Speed Stability*
- *Single/Double Density Operation*
- *Industry/ANSI Standard Interface*

MPI 51 (Single Head/40 tracks)
125K/250K Bytes Single/Double Density**
..... **$259.95**

MPI52 (Dual Head/80 tracks (40/side))
250K/500K Bytes Single/Double Density**
..... **$349.95**

MPI 91 (Single Head/80 tracks)
250K/500K Bytes Single/Double Density**
..... **$399.95**

MPI 92 (Dual Head/160 tracks (80/side))
500K/1000K Bytes Single/Double Density**
..... **$524.95**

MPI Technical Manual **$6.95**
**Unformatted data storage

SIRIUS SYSTEMS
7528 Oak Ridge Highway
Knoxville, Tennessee 37921

TO ORDER CALL (615) 693-6583

Phone Orders Accepted 9AM-7PM (EST) Mon-Fri

We accept **MC, VISA, AE, COD** (requires Certified Check, Cashier's Check or Cash) and **Checks** (personal checks require 14 days to clear). **SHIPPING AND HANDLING:** $7.00 per Floppy Disk Drive or 80+ Module ■ 5% for other items (any excess will be refunded) ■ **Foreign Orders** add 10% for Shipping & Handling. Payment in U.S. currency ■ Tennessee residents add 6% Sales Tax ■ **VOLUME DISCOUNTS AVAILABLE**

Circle 112 on inquiry card.

dinary television set, we must either modify the set internally to give it a direct composite-video input, like that of a video monitor, or else we must add a *modulator* to our computer. The modulator acts like a tiny broadcasting station; it generates a VHF or UHF carrier that corresponds to a standard television channel (which is not being used by a local transmitting station) and modulates it with the computer video signal. The modulated signal can then be connected to the receiver's antenna terminals.

Displaying Computer Data

For our computer to produce a display on a television set or a video monitor, it must generate a composite-video signal. Generating the horizontal and vertical synchronizing pulses is relatively easy, since they just repeat over and over in a fixed numerical relationship. Our computer's internal clock can serve as a stable high-frequency source for a few additional circuits to use in producing the horizontal and vertical synchronizing signals.

Combining functions helps to keep the cost of personal computing down.

To make the display circuits in personal computers simpler and less expensive, the whole complicated business of interlaced scanning lines and alternating fields has been eliminated in most cases. Instead, the odd half-line per field, which would have been needed to make the field lines interlace, is omitted; this leaves 262 lines per field. Without the interlace, the lines of any two successive fields appear in exactly the same places, so we can just as well think of a computer display as having 60 frames per second, with 262 lines per frame. In fact, a different number of lines per frame may be used if the designer finds it convenient, but the number must be within a few percent of 262 for the display to work with a standard television set.

Video Refresh

While synchronization is easy, generating a video signal with our computer is a little more difficult. First of all, a television picture must be continually regenerated by repeating the entire scanning process 60 times per second. This continual regeneration of the display is called *video refresh*; it requires a stream of data at a rate much too fast for our computer to keep up with—if the system had to compute the data anew for every scan. Instead, most computer designers set aside enough memory to store all of the data that will appear on the display. This reserved memory is called the *video-refresh memory*. Circuits designed especially for video-displaying read data from the refresh memory, in step with the video-synchronizing pulses, and transform the data into the video signal which is displayed.

Using part of the computer's own memory for video refresh has not been the general rule. Most large computer systems include video terminals that are independent of the main computer and contain their own

NEW EATON 7000+ PERSONAL COMPUTER PRINTER



PLUG IN AND PRINT OUT— IN SECONDS!

Now you can add hard copy capability to your computer with plug-in simplicity that matches up to any micro system. And with the Eaton 7000+ dot-matrix printer, you get complete printout versatility at an affordable price.

Interfaces with any personal computer
Apple, Commodore Pet, TRS-80, Northstar and others—no matter what type of computer you have or are thinking of buying, Eaton 7000+ fits. Just plug it in and start printing. You'll get virtually maintenance-free operation with a minimum of moving parts. And minimum life of 100 million characters with Eaton's newest printhead, while the print mechanism is designed for a minimum of 10 million cycles.

High performance design
The 7000+ features uni-directional printing at a speed of 1.25 lines per second. It accepts any standard single or 2-ply roll paper from ¾" to 3⅞" wide and prints 3⅓" line with 40 to 64 adjustable character capacity.

For immediate information call: Eaton Printer Product Operations, 307/856-4821.

For descriptive literature and the name of your nearest dealer write Eaton Corporation, Count Control/ Systems Division, 901 South 12th St., Watertown, WI 53094.
Dealer inquiries invited.

EATON
Electrical/Electronic Control

EAT-1A

Circle 392 on inquiry card.


GO 16-BIT NOW — WE HAVE MADE IT EASY

8086

8 Mhz. 2-card CPU Set

WITH 86-DOS™ $595

ASSEMBLED, TESTED, GUARANTEED

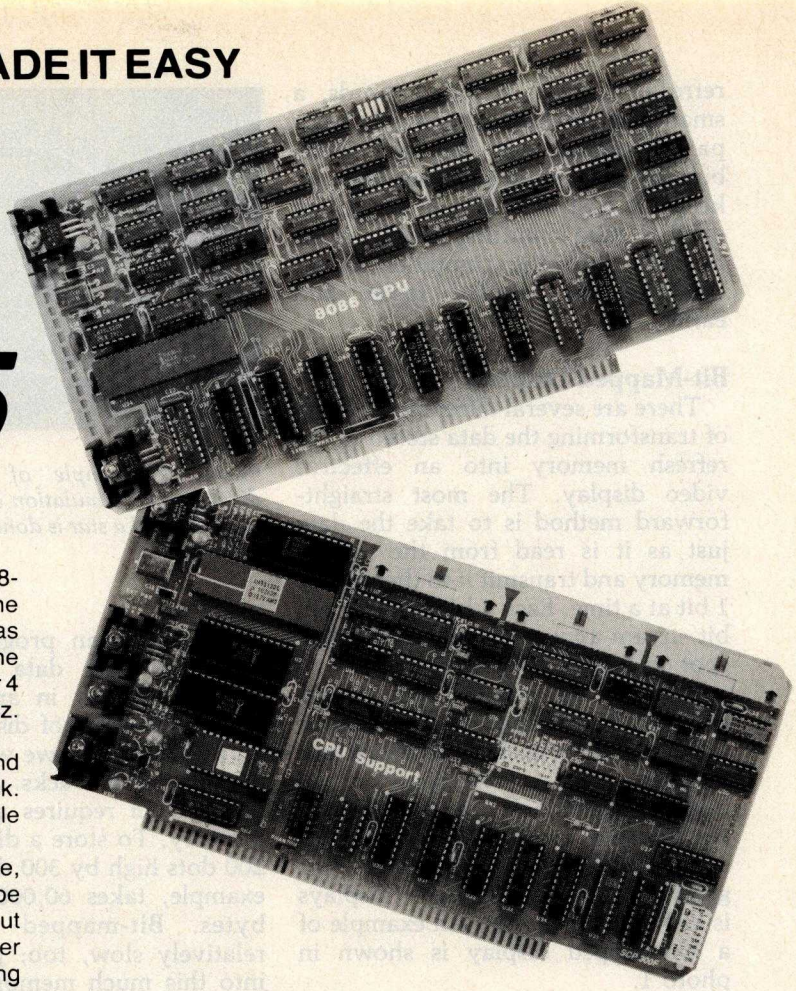

With our 2-card 8086 CPU set you can upgrade your Z80 8-bit S-100 system to run three times as fast by swapping the CPUs. If you use our 16-bit memory, it will run five times as fast. Up to 64K of your static 8-bit memory may be used in the 8086's 1-megabyte addressing range. A switch allows either 4 or 8 Mhz. operation. Memory access requirements at 4 Mhz. exceed 500 nsec.

The EPROM monitor allows you to display, alter, and search memory, do inputs and outputs, and boot your disk. Debugging aids include register display and change, single stepping, and execute with breakpoints.

The set includes a serial port with programmable baud rate, four independent programmable 16-bit timers (two may be combined for a time-of-day clock), a parallel in and parallel out port, and an interrupt controller with 15 inputs. External power may be applied to the timers to maintain the clock during system power-off time. Total power: 2 amps at +8V, less than 100 ma. at +16V and at -16V.

86-DOS™, our $195 8086 single user disk operating system, is provided without additional charge. It allows functions such as console I/O of characters and strings, and random or sequencial reading and writing to named disk files. While it has a different format from CP/M, it performs similar calls plus some extensions (CP/M is a registered trademark of Digital Research Corporation). Its construction allows relatively easy configuration of I/O to different hardware. Directly supported are the Tarbell and Cromemco disk controllers.


The 86-DOS™ package includes an 8086 resident assembler, a Z80 to 8086 source code translator, a utility to read files written in CP/M and convert them to the 86-DOS format, a line editor, and disk maintenance utilities. Of significance to Z80 users is the ability of the translator to accept Z80 source code written for CP/M, translate this to 8086 source code, assemble the source code, and then run the program on the 8086 processor under 86-DOS. This allows the conversion of any Z80 program, for which source code is available, to run on the much higher performance 8086.

BASIC-86 by Microsoft is available for the 8086 at $350. Several firms are working on application programs. Call for current software status.

All software licensed for use on a single computer only. Non-disclosure agreements required. Shipping from stock to one week. Bank cards, personal checks, CODs okay. There is a 10-day return privilege. All boards are guaranteed one year — both parts and labor. Shipped prepaid by air in US and Canada. Foreign purchases must be prepaid in US funds. Also add $10 per board for overseas air shipment.

8/16 16-BIT MEMORY

This board was designed for the 1980s. It is configured as 16K by 8 bits when accessed by an 8-bit processor and configured 8K by 16 bits when used with a 16-bit processor. The configuration switching is automatic and is done by the card sampling the "sixteen request" signal sent out by all S-100 IEEE 16-bit CPU boards. The card has all the high noise immunity features of our well known PLUS RAM cards as well as "extended addressing". Extended addressing is a replacement for bank select. It makes use of a total of 24 address lines to give a directly addressable range of over 16 megabytes. (For older systems, a switch will cause the card to ignore the top 8 address lines.) This card ensures that your memory board purchase will not soon be obsolete. It is guaranteed to run without wait states with our 8086 CPU set using an 8 Mhz. clock. Shipped from stock. Prices: 1-4, $280; 5-9, $260; 10-up, $240.

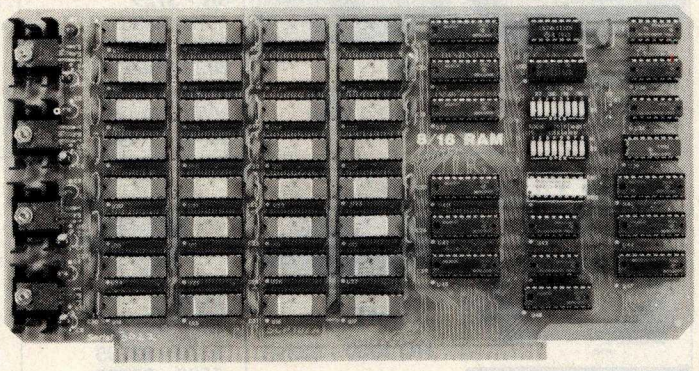

Seattle Computer Products, Inc.

1114 Industry Drive, Seattle, WA. 98188

(206) 575-1830

Circle 113 on inquiry card.

refresh memory. In other words, a small personal computer is a hybrid: part computer, part terminal. Combining functions in this way helps to keep the cost of personal computing down. Also, putting the refresh memory into the computer makes changing the display faster and easier.

Bit-Mapped Displays

There are several different methods of transforming the data stored in the refresh memory into an effective video display. The most straightforward method is to take the data just as it is read from the refresh memory and transmit it to the display 1 bit at a time. Each 1 bit in this serial bit stream appears on the screen as a spot of light, and each 0 bit as darkness. The size of the refresh memory is matched to the picture scan so that for each bit in the refresh memory there is one spot on the display screen. A one-to-one correspondence of this kind is called a *map*, and this technique for generating computer video displays is called *bit mapping*. An example of a bit-mapped display is shown in photo 1.

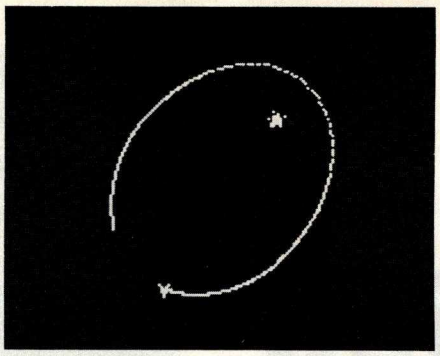


Photo 1: *Example of a bit-mapped display. This simulation of a spaceship in orbit around a star is done on a 180-bit by 150-bit map.*

Since we can program the computer to store data bits into the refresh memory in any pattern we desire, this kind of display can have all the versatility we want, but there are some drawbacks. For one thing, this system requires a large refresh memory. To store a display which is 200 dots high by 300 dots across, for example, takes 60,000 bits or 7500 bytes. Bit-mapped displays are relatively slow, too; just storing 0s into this much memory in order to clear the screen to black takes close to 1 second with the fastest microprocessor.

Displaying only letters and numbers means we can get by with a much smaller refresh memory than is needed for bit mapping. A letter that occupies eight rows of eight dots requires 8 bytes of memory in the bit-mapped display, but we can encode the same letter in ASCII (American Standard Code for Information Interchange) and reduce the size of the refresh memory by a factor of 8. This means that instead of sending the data bits directly to the display, it is necessary to decode each stored character and generate the appropriate video information. To do this, the refresh circuits send the character code (along with signals that indicate which of the eight rows of dots is currently being displayed) to another circuit called a *character generator*. The character generator is little more than a read-only memory that contains the video bit patterns for each of the characters we want to display.

Having a smaller refresh memory more than compensates for the additional cost of the character generator. For example, our 200-dot by 300-dot display has a capacity of 925 characters, in twenty-five rows of thirty-seven characters each. The bit-mapped memory needed for this is 7500 bytes, but we can store 925 characters in only 925 bytes if we use the character generator. It takes only one-eighth as long to update the refresh memory, too. The main drawback is its lack of versatility; we can only display characters of a fixed size and spacing. Obviously, a method of getting many different shapes without increasing the size of the refresh memory would be more flexible.

Using a byte of memory for each character, in all possible combinations of 8 bits, requires a total of 256 different codes. A complete set of uppercase and lowercase letters, numbers, and punctuation takes only ninety-six codes, leaving 160 combinations that we can assign to special shapes useful for graphics. Each special shape must be designed using the same number of dots and rows as the other characters. It may often be necessary to use several of them to make up the image of one object in the display. We can allow for this by setting up special characters such as

(212) 986-7690

MAIL ORDER ONLY

Micro Computer DISCOUNT Company


Your One Stop For. . .Quality and Huge Savings

QUALITY • DELIVERY • SERVICE


60 E. 42nd St. Suite 411 New York, NY 10017



APPLE
16K - $ 959
48K - $1059
Disk — $529
Other Products Avail



CENTRONICS
737-1 — $895



APF
IM1 - $495
IM2 - $988



COMMODORE
8K - $729
16K - $888
32K - $1088
2022 - $695
2040 - $1088
8050 - $1435
8032 - $1495




SUPERBRAIN*
*32K - $2445
64K - $2645
64KQD - $3395
*32K add-in memory only $10 with purchase

PAPER TIGER
440G - $895






XYMEC
HQ 1000 - $2395



NEC SPINWRITER
5510 - $2795
5520 - $2990



*XEROX
1740 RO - $2619
1740 SR - $2995
1750 RO - $2795
1750 KSR - $3170
1730 - $2195

MAIL ORDER ONLY
Send Certified Check (Personal or Company Checks require 2 weeks to clear.)
We pay all shipping and insurance charges except items marked with asterisk.
VISA, MasterCharge add 5% N.Y.S. Residents add appropriate sales tax.

*(DENOTES ITEMS SHIPPED F.O.B. NYC)

PHONE (212) 986-7690

straight-line segments, corners, intersections, and so on, in various orientations.

Several personal-computer manufacturers have taken this approach. While keeping the speed and small refresh memory of the character-generator-based design, they also have a reasonable graphics capability with good resolution. To compensate for the limited number of special shapes that you can have with this method, the Exidy and Texas Instruments computers have *programmable* character generators so that you can design your own shape characters and change them as needed.

Character Subcells


There is another way to add graphics capability to the character-generator display. Suppose we divide each of the character cells into four subcells, each of which is four dots square. By displaying any combination of these four subcells, with all dots illuminated, there will be sixteen possible shapes which we can display in each character location. By allocating sixteen extra character codes to represent these sixteen combinations, we can have a very versatile graphics system; however, it won't have much resolution. Dividing each character in half horizontally and vertically converts the twenty-five rows of thirty-seven characters in our example to a 50-block by 74-block graphics display.

We could increase the resolution by dividing the character cells into smaller pieces, but the number of combinations of blocks we would have to encode would increase very quickly. If we divide each cell by 4 in each direction, we increase the resolution to 100 by 148; but, there will be sixteen subcells in each character cell so we must store 16 bits of data for each cell. Since there are 65,536 different 16-bit codes, using read-only memory for the character generator becomes impractical. Instead, it is necessary to devise some logical method for generating the subcell patterns by decoding an extra byte of information, using additional circuitry. Also, the refresh memory would have to be twice as big to store these 2-byte codes. This may help to explain why the personal computers that use this approach have relatively low resolution. ■

ENTREPRENEURS NEEDED

MORE THAN EVER IN THE MICRO-COMPUTER INDUSTRY.

The shortage of knowledgeable dealers/distributors is the #1 problem of microcomputer manufacturers. Over 300 new systems houses will go into business this year, but the number falls short of the 1200 needed. It is estimated that the nationwide shortage of consultants will be over 3000 by 1981. The HOW TO manuals by Essex Publishing are your best guide to start participating in the continued microcomputer boom.




HOW TO START YOUR OWN SYSTEMS HOUSE
6th edition, March 1980

Written by the founder of a successful systems house, this fact-filled 220-page manual covers virtually all aspects of starting and operating a small systems company. It is abundant with useful, real-life samples: contracts, proposals, agreements and a complete business plan are included in full, and may be used immediately by the reader.

Proven, field-tested solutions to the many problems facing the small systems house are presented.

From the contents:
• New Generation of Systems Houses • The SBC Marketplace • Marketing Strategies • Vertical Markets & IAPs • Competetive Position/Plans of Major Vendors • Market Segment Selection & Evaluation • Selection of Equipment & Manufacturer • Make or Buy Decision • Becoming a Distributor • Getting Your Advertising Dollar's Worth • Your Salesmen: Where to Find Them • Product Pricing • The Selling Cycle • Handling the 12 Most Frequent Objections Raised by Prospects • Financing for the Customer • Leasing • Questions You Will Have to Answer Before the Prospect Buys • Producing the System • Installation, Accaptance, Collection • Documentation • Solutions to the Service Problem • Protecting Your Product • Should You Start Now? • How to Write a Good Business Plan • Raising Capital

$36. **No. 10**




HOW TO BECOME A SUCCESSFUL COMPUTER CONSULTANT
by Leslie Nelson, May 1980

Independent consultants are becoming a vitally important factor in the microcomputer field, filling the gap between the computer vendors and commercial/industrial users. The rewards of the consultant can be high: freedom, more satisfying work and doubled or tripled income. **HOW TO BECOME A SUCCESSFUL COMPUTER CONSULTANT** provides comprehensive background information and step-by-step directions for those interested to explore this lucrative field:

• Established consulting markets • How to get started • Itemized start-up costs • Are you qualified? • Beginning on a part-time basis • The Marketing Kit • Should you advertise? • Five marketing tips • Getting free publicity • How much to charge • When do you need a contract? • Sample proposals • Which jobs should be declined • Future markets • The way to real big money • Avoiding the legal pitfalls • How consultants' associations can help you • The National Register of Computer Consultants • How others did it: real-life sample cases • and much more.

$28. **No. 16**



FREE-LANCE SOFTWARE MARKETING 3rd edition, June 1980

Writing and selling computer programs as an independent is a business where • you can get started quickly, with little capital investment • you can do it full time or part time • the potential profits are almost limitless. Since the demand for computer software of all kinds is growing at an explosive rate, the conditions for the small entrepreneur are outstanding.

This manual will show you how to sell your own computer programs using these proven techniques: • direct to industries • through consulting firms • through manufacturers of computer hardware • in book form • mail order • through computer stores. It will show you how to profitably sell and license all types of software ranging from sophisticated analytical programs selling for thousands of dollars, down to simple accounting routines and games for personal computers.

The book will guide you step by step through the process of marketing, advertising, negotiating a contract, installing software, training users and providing maintenance and support. It also contains sample software contracts that have been used in actual software transactions. Also included are tips on how to negotiate with a large corporation, ways of avoiding personal liability, techniques for obtaining free computer time and hints on how to run a free-lance software business while holding a full-time job.

$30. **No. 32**

ESSEX PUBLISHING CO. Dept. 2
285 Bloomfield Avenue • Caldwell, N.J. 07006

Order books by number. Send check, money order (U.S.$), VISA or Master Charge #. Publisher pays 4th class shipping. For Air Mail shipping add $2.50 per book in USA and Canada, $5.00 in Europe, $8.00 elsewhere. N.J. residents add 5% sales tax.

☐ No. 10 ☐ No. 16 ☐ NO. 32 ☐ Check enclosed ☐ Credit card

Name _____

Address _____

City _____ State _____ Zip _____

Card # _____ Exp. _____

For faster shipment on credit card orders call (201) 783-6940 between 9 and 5 Eastern time.

Circle 114 on inquiry card.

Product Review

The Power of VisiCalc

Robert E Ramsdell
POB 59
Rockport MA 01966

At a Glance

Software:	*VisiCalc*
Type:	*Screen-oriented matrix calculator for projections, budgeting, and many other numeric/data manipulations*
Author:	*Software Arts Inc*
Distributor:	*Personal Software Inc, 1330 Bordeaux Dr, Sunnyvale CA 94086, (408) 745-7841*
Price:	*$150.00*
Format:	*5-inch floppy disk*
Language:	*Machine language*
Computers:	*Apple II, Apple II+ or Apple III; Radio Shack TRS-80, Model I or II; Atari 800; Commodore PET and CBM computers, minimum 32 K bytes of programmable memory required, 48 K or more recommended*
Documentation:	*Loose-leaf binder with eighty-page tutorial manual, reference card*
Audience:	*Businessmen, accountants, attorneys, real-estate investors — anyone who needs to use a calculator for determining options available under different scenarios*

Introduction

The most exciting and influential piece of software that has been written for any microcomputer application is VisiCalc. I've been using VisiCalc almost full-time for the past six months and have written over 300 applications (which I refer to as models) for the program. During that time I have learned its strengths and weaknesses and have found that the authors have allowed for a tremendous number of variables and contingencies in its operation. The instant communication between the operator and the screen facilitates and enhances the manageability and interactivity of the program.

Since I am a certified public accountant, the majority of applications I have written are oriented towards accounting, a usage for which VisiCalc is particularly appropriate. In addition, I know of several attorneys who are using the program for estate- and gift-planning, one of whom is maintaining his accounts receivable, as well, on VisiCalc. A number of real-estate agents are using it to perform real-property investment analysis.

About the Program

VisiCalc is an electronic scratch sheet that is sixty-three columns wide (lettered A thru BK) and 254 rows long (numbered 1 thru 254). Any column/row coordinate can be referred to by any other column/row coordinate arithmetically or trigonometrically. Once the relationships between the coordinates have been established in the model, a change in any value which affects other values will be instantly updated. This gives the computer operator the ability to play instant what-if situations with the value in the matrix.

The program has a great deal of flexibility in its formatting, allowing any coordinate to be a label or a value, and allowing columns to be adjusted from three characters to full-screen width. The screen can be split into two windows, either horizontal or vertical, and each can be scrolled independently of the other. This makes the comparison of information extremely easy. Values can be formatted as full-decimal notation (up to eleven significant digits), two-place decimal (for financial usage), and integer.

An annoyance that I have found in the program is its inability to round off integers, which causes columns to add up imperfectly. This often creates the need for a great deal of additional work when attempting to prepare financial information directly from the model.

One of the most powerful features of VisiCalc is its ability to replicate an entire series of coordinate functions with a few keystrokes. When creating models with a series of identical calculations (such as a 10-year business forecast), only the calculations for the first column must be entered. Then the subsequent columns can replicate the same calculations (VisiCalc automatically uses the new coordinates) in a matter of seconds. This is a tremendous time-saving device when elaborate models are being created. The authors of VisiCalc have also provided the ability to insert, delete, and move entire rows and columns. This feature is useful if the model is finished and

About the Author

Robert E Ramsdell, CPA, is a microcomputer consultant who lives and works in Rockport, Massachusetts. His company, Pansophics, Ltd, published federal income tax models for 1979 and 1980 using VisiCalc and markets several other financial modeling packages.

the user discovers that an important calculation was omitted.

VisiCalc can be interfaced through most printers, and various printer configuration routines are set up directly through the program. The program will output to a printer with any number of character widths, so the choice of printer depends on the needs of individual users. Finally, the methods by which the program loads, saves, and deletes models on the disk are very well designed.

Specific Applications

Accounting applications abound for VisiCalc. Financial analysis, business forecasts, and projections which formerly required hours can be completed with VisiCalc in a matter of minutes. The pricing on a bill-of-materials inventory can be updated in a matter of seconds. Productions estimates can be updated instantly. Different scenarios can be examined and variables and constants interchanged until a workable model is achieved. Even with the advent of programmable electronic calculators, the complexity of forecasting (due to the interdependency of the variables) has limited the accountant to either the most rudimentary forecast or the extremely expensive alternative of time-sharing on a large computer.

Sophisticated and statistically valid time-series analysis can be performed on VisiCalc. Lead and lag regression analysis becomes as easy as entering the various formulas. Each of the variables can be changed or updated, and the results of the new analysis will be instantly displayed.

Small businesses will also find uses for VisiCalc. A model can be created which will allow for the printing of a financial statement whenever a trial balance is entered. Financial ratios and analysis are easily performed. The model can even calculate income tax and compare the current results with those of a previous period or a budget. (Some marketed models even print out tax returns.) Also, budgets are relatively easy to prepare (thanks to the replicate command), and changes and updates are easily entered.

More complex models can be designed for areas such as real estate and stock market investment analysis, where many interdependent variables must be given consideration. A change in any of these variables will instantly cause the entire model to be updated, and new comparisons can be made.

Documentation


VisiCalc comes with an eighty-page tutorial manual that's very useful for the beginner and a well-designed reference card. After one reading, however, the manual is not of very much help in running the program. A new manual is being written and may be available soon. In addition, several books are in preparation which will aid the VisiCalc owner in using the program.

Program Constraints

The primary constraint of the VisiCalc program is the programmable memory available to the user. In the Apple II, for example, a 48 K-byte machine will have about 25 K bytes available to the user for modeling. This may sound like a lot, but in fact model files require a lot of room. To compound this problem there is no easy way to

E · X · P · A · N · D

YOUR TRS-80* or S-100

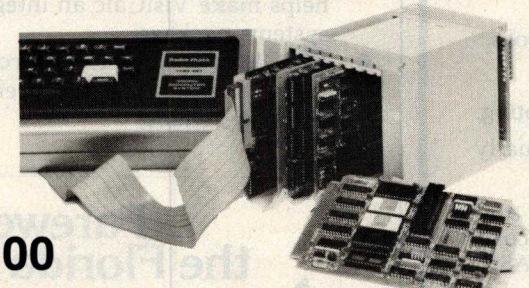

INTRODUCING THE XTD-TRS INTERFACE CARD FOR THE STD BUS

This card permits direct connection between the TRS-80* and the STD BUS system. The TRS-80* can even be used as a development system for Z-80 STD BUS. QC MicroSystems distributes a full line of STD BUS products from a number of manufacturers including Mostek, Xitex, Intelligence Systems.

200 NS MEMORY!!

High speed 4116 RAMS for Maximum Reliability from your TRS-80*.


SET OF 8 FOR $44

OTHER RAMS	$(1-9)
2114 UCB 1K X 4 450 NS	5.00
4118N-4 1K x 8 250 NS	24.00
4104N-4 4K x 1 250 NS	10.50
PROMS	
2716T-12 2K x 8 650 NS	13.75
2716T-8 2K x 8 450 NS	14.50

Z80 PARTS	2.5 MHZ $(1-9)	4.0 MHZ $(1-9)
Z80-CPU	11.00	15.00
Z80-PIO	8.50	11.00
Z80-CTC	8.50	11.00
Z80-DMA	29.00	37.00
Z80-SIO	37.50	45.00

MISC.	
12" Video Monitor B&W	$149.00

Xitex XTD-TRS Interface Card



DDT-80 ROM

$260 Includes: DDT-80 ROM

OFF THE SHELF STD BUS PRODUCTS

AVAILABLE NOW:

MDX-CPU1	$260	Z80 CPU/RAM/PROM
MDX-CPU2	$295	Z80 CPU/RAM/PROM
MDX-DRAM 8/32	*	Dynamic RAM
MDX-PIO	$250	Parallel I/O
MDX-A/D 8,10,12	*	A/D Converters
MDX-D/A 8, 12	*	D/A Converters
SYS-CPM*	*	CP/M 2.2 Disk S.W.
MDX-MATH	$699	Floating Point Math
MDX-SIO	$260	Serial I/O
XTD-VDT	*	Video Interface
PROM-I	$165	PROM Programmer
MDX-EPROM/UART	$225	Combination PROM/UART
CARD CAGES	*	8-22 Slot with MotherBoard
POWER SUPPLY	$135	

*Contact QC for Pricing Options

Ask For Our Full Catalog Of Products And Services

MasterCharge, Visa, American Express, Check, C.O.D. accepted. Add $3.00 for U.S. Shipping & Handling. Allow two weeks for shipment. Min. order of $10.00. All products covered by a 90 day OEM warrenty. Prices subject to change without notice.

*TRS-80 and CP/M are registered trademarks of Tandy Corp. and Digital Research, respectively.

Overseas Inquiries Welcome!

QC Micro Systems

P.O. BOX 401326
GARLAND, TEXAS 75040
(214) 343-1282

Ask for our complete catalogue!

You can talk to more computers, faster and easier, with the VET/2 from SCOTT



The Scott VET/2 is a compact, highly versatile Voice Entry Terminal developed for TRS-80 users — and available soon for the PET and APPLE computers. Key features of the VET/2 include:

- Easy to use — all programs may be written in Level II BASIC. One USRn statement is all that's needed to allow your program to be voice controlled.
- Performance comparable to systems costing $10,000 or more.
- High accuracy (98+%) and fast recognition.
- Supplied with demo programs and software tools.
- Connects directly to screen printer I/O port.
- Simplified training mode with automatic prompting.
- Overlay features make vocabulary size virtually unlimited.

The user manual fully describes the operation and training procedures for the VET/2 and includes complete instructions on interfacing the VET with BASIC programs.

All hardware covered by 90-day warranty. Software guaranteed for replacement only. Prices subject to change without notice.

Send coupon or telephone today for more information!

SCOTT INSTRUMENTS 815 North Elm Denton, Texas 76201 817/387-1054

Please place my order for:

☐ VET/2 (includes manual and shipping) $898.50

☐ VET/2 Operator's Manual $7.20

Texas residents add 5% tax

California residents add 6% tax

Payment Enclosed ☐

Master Charge ☐

VISA ☐

C.O.D. ☐

Exp. Date _____

Card No. _____

Ship to: _____

Address _____

City _____ State _____ Zip _____

Sig. _____ *All orders must be signed.*

move information between models (for example, in a business consolidation), so that using the same basic information in different models can be a big chore.

The only other limiting factor is the fact that the VisiCalc disk cannot be copied or backed up. The obvious reason for this to avoid software piracy, but it could prove to be a problem if someone decided that 5¼ inches was the perfect size for a coaster. There is a dealer program for instant replacement, however.

Data Interchange Format


Software Arts Inc, the creator of VisiCalc, has developed a common language for data (which it uses in VisiCalc) called the DIF (Data Interchange Format). The basic goal of the DIF is to allow the interchange of data between many different kinds of programs (such as data bases, graphing programs, report generators etc). The type of data which is addressed by the DIF is data which is stored in tabular form — columns and rows. By setting up a standard for such data handling it becomes easy to manipulate the data through program control.

Programmers and others who are interested in learning more about the DIF or would like to purchase the *Programmer's Guide to Data Interchange Format* ($1.50) should write to The DIF Clearinghouse, POB 70, MIT Branch, Cambridge MA 02139.

Conclusions

- VisiCalc is an extremely well-designed software package that can be used by anyone with or without a programming background. There is no programming language involved in the use of VisiCalc.
- The instant interaction between the user and the screen facilitates the understanding of the manipulation of the variables in the matrix.
- The ability to interchange data with other programs helps make VisiCalc an integral part of any business systems package.
- VisiCalc is the first program available on a microcomputer that has been responsible for sales of entire systems. ■

Farewell to the Florida panther.

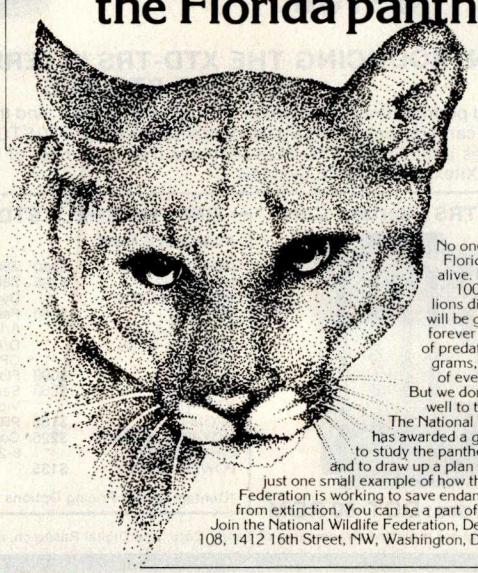


No one knows how many Florida panthers are still alive. Perhaps fewer than 100. If these mountain lions die, another creature will be gone from the earth forever . . . the victim, first, of predator elimination programs, and more recently, of ever-shrinking habitat. But we don't have to bid farewell to the Florida panther. The National Wildlife Federation has awarded a grant to researchers to study the panther and its future . . . and to draw up a plan for saving it. That's just one small example of how the National Wildlife Federation is working to save endangered species from extinction. You can be a part of the effort. Join the National Wildlife Federation, Department 108, 1412 16th Street, NW, Washington, DC 20036.

Circle 115 on inquiry card.

-Technological Breakthrough-

COMPUTER-METER

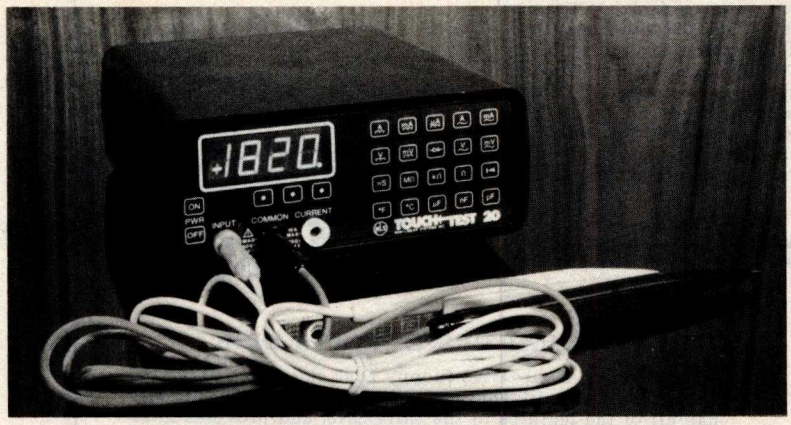

Microprocessor technology and the inventors of the digital meter have teamed up to bring you the world's most versatile test instrument.

Computers for the home. Toys that speak. *Machines that think.* Space age technology brings new changes to your world every day. Even those of us who work with this new technology are constantly amazed by the latest applications of the ubiquitous microprocessor. And here is a remarkable new way for computer techonology to simplify your work life. When the president of our company (a businessman, not a technician) saw one of the pre-production models of this new test instrument at a trade show, even he recognized it for what it is: a remarkable new way for anyone involved with electronics to save time, money, and space. We've shown it to our technicians and their reactions were similar, though more down-to-earth: *"I want it!"*

There's much more to tell about this incredible little meter that takes the place of at least 3 separate test instruments, but we're sure that the Touch Test 20 will end up very near the top of your equipment list.

STAYING AHEAD

For three decades, the inventors of the Touch Test 20, Non-Linear Systems, have made a science of staying ahead through innovation in test equipment. In 1952, NLS propelled electronic testing into the space age by introducing the world's first digital voltmeter, and they have remained committed to first rate value and performance through sophisticated, yet simplified electronic test tools. Their battery powered portable oscilloscopes have "lightened the load" of both field and laboratory engineers all over the world, and NLS digital panel meters have also become a world-wide standard.

The Touch Test 20 adds to the NLS reputation for accuracy and reliability and we're proud to be among the first to be able to offer it to you.

3 lb 8 oz TEST LAB

We think the Touch Test 20 is miniaturization at its best, because no compromises in accuracy and versatility were made in the process of squeezing a trunk full of test equipment into a rechargeable battery powered portable test lab.

It will measure AC voltage, AC current, resistance, capacitance, conductance, temperature, DC voltage, DC current, continuity, and test diodes - 20 key test functions, 10 electrical parameters and 44 ranges. Now, you can take one lab to the field instead of a cumbersome collection of individual testers. And in the lab, the Touch Test 20 will go a long way toward cleaning up the cluttered array of equipment found on most test or troubleshooting benches.

JUST TOUCH

The "touch" in Touch Test 20 means no more knobs and dials to fiddle with: selection of the various functions is accomplished by a tap of the finger on one of the touch sensitive switches on the front panel. When you switch functions, there's an audible bleep and an LED lights to show the function selected. Selecting the range is also a beautifully simple procedure - just touch one of the switches below the display to shift the decimal point to the appropriate place for the signal you're measuring.

Non-Linear Systems, Inc.
Specialists in the science of staying ahead.

SPECIFICATIONS

VOLTS	**1 mV to 1 KV @ .2%**
AMPERES	**1 uA to 10 A @ 1%**
OHMS	**10 uOhm to 19.99 MOhm @ .25%**
TEMPERATURE	**-40° C to +150° C +/- 3°**
CAPACITANCE	**1 pF to 199.9 uF @ 1%**
CONDUCTANCE	**.01 nS to 199.9 nS @ .2%**
DIODE TEST	**1 mV to 1999 mV @ .2%**
SIZE	**2.9" x 6.4" x 7.5"**
WEIGHT	**3 lbs 8 oz (including batteries)**

EVEN IDIOTS

While no intrument is totally idiot-proof, the Touch Test 20 certainly comes close: when any function is selected, this instrument automatically selects the least sensitive range of the function, to avoid embarrasing but all to common smoke test situations. We're told (though we *do not* advise such mistreatment), that you can plug the test leads into a 120 volt wall socket and select any function without causing terminal damage to the instrument.

To complement these remarkable capabilities, the Touch Test 20 is shipped ready to go to work for you, complete with a charger unit, rechargeable batteries, high quality test probes, a component test block, and a temperature probe.

ONE YEAR WARRANTY

Each Touch Test 20 is individually tested and "burned-in" at elevated temperatures to assure the quality of the instrument shipped to you. However, should the unlikely happen, the manufacturer stands behind their reputation for reliability with a full one-year limited warranty against any defects in material or workmanship. This of course excludes damage brought about through any kind of abuse, and the warranty extends only to the original purchaser.

PRIORITY SHIPMENT

We at JADE have been in the business of supplying computers and related equipment for five years now, and we've always guaranteed our customer's satisfaction. We know that you'll be happy with this piece of equipment, so try it for thirty days; if the Touch Test 20 doesn't live up to your expectations, we'll quickly refund the purchase price. And don't worry about slow delivery - the manufacturer has assured us that we will have priority shipment of the Touch Test 20 directly from the factory. This plus our computerized order processing system assures you of the fastest possible delivery.

CALL US TOLL FREE

To order your Touch Test 20 send **$425.00** plus $2.95 shipping and handling to JADE Computer Products, 4901 West Rosecrans, Hawthorne, California 90250 (California residents please add 6% sales tax). Credit card buyers may use one of our toll free numbers listed below.

JADE Computer Products has been an industry leader in the microcomputer field for over five years - further assurance of our dedication to fast service and continued product support.

JADE
Computer Products

4901 West Rosecrans Ave
Hawthorne, California 90250

Continental US . . . 800-421-5500
Inside California . 800-262-1710
Los Angeles Area 213-973-7707

Call for your free copy of our catalog containing over 4000 different computer products.

Circle 116 on inquiry card.

CBM™ 8032 BUSINESS COMPUTER



The new Commodore 8032 Business coomputer offers a wide screen display to show you up to 80-character lines of information. Text editing and report formatting are faster and easier with the new wide-screen display. The 8032 Business Computer also provides a resident Operating System with expanded functional capabilities. You can use Basic on the 8032 Business Computers in both interactive and program modes, with expanded commands and functions for arithmetic, editing, and disk file management. The CBM 8032 Business Computer is ideally suited for the computing needs of the business marketplace. Call for additional information.



commodore

$1695

$1795


***32K RAM, 14K 4.0 BASIC**
***IEEE BUS *80 x 25 CRT**
***Ideal for WordProcessing**
or other business/technical computer uses.

CBM™8050 DUAL DRIVE FLOPPY DISK

The CBM 8050 Dual Drive Floppy Disk is a much enhanced version of the intelligent CBM 2040 Disk Drive. The CBM 8050 has all of the features of the CBM 2040, and provides more powerful software capabilities, as well as one megabyte of online storage capacity. The CBM 8050 supplies relative record files and automatic diskette initialization. It can copy all the files from one diskette to another without copying unused space. The CBM 8050 also offers improved error recovery and the ability to append to sequential files.



MULTI-USER TIME SHARE OFFERED TO YOU BY THE NEECO MULTI-CLUSTER



At a low entry cost, up to eight CBM computers can transfer data bi-directionally to one CBM Dual Disk Drive. The MULTI-CLUSTER, designed with its own independent power supply, provides a connection from one CBM computer work selection to other CBM computer work stations, allowing data transfer and data access on a priority queuing basis. This system provides the cost effectiveness required in a multi-using environment by establishing the dual disk drive as a central mass storage unit. This provides a high degree of disk accessibility.

The standard configuration of this system allows 3 CBM* microcomputers (maximum of 8) connected through the MULTI—CLUSTER to the IEEE port of the 2040 Disk Drive. More CBM's can be added to the system according to the user's need.

MULTI-CLUSTER

Standard Components	**Additional Component Prices**
One Multi-Cluster Controller MC800A	Each extra CM-100 ..... $250
Three Channel Modules ... CM-100	Output Printer Module $200
	(for Centronics Protocal) $200

Multi-Cluster is a product of BMB Compuscience.

NEECO PROUDLY ANNOUNCES . . .

DATASOURCE 1

"A full featured Database Manager for the Commodore 8032"

Never before has a true Database been available for Commodore Computers. DATASOURCE 1 contains database capabilities you would not expect on a microcomputer system. Capabilities like selective search by any sub-field or field within a record, mathematic manipulation, up to 120 fields per screen display, and much much more! DATASOURCE 1's major feature is total usability! DATASOURCE was designed for use by you!

MAJOR FEATURES INCLUDE:
• SCREEN ORIENTED • SELECTIVE OR SEQUENTIAL SEARCHES • UP TO 120 SORTABLE DISPLAY FIELDS • UP TO 2 DISPLAY SCREENS OF DATA PER RECORD • HUNT FUNCTION (find characters in any record) • POWERFUL MATHEMATICAL MANIPULATION • SUPPORT PROGRAMS INCLUDE: FILE OR EDIT SCREEN RECORD, POWERFUL SORT/MERGE, DIRECTORY MANAGER, EXTENDED OUTPUT REPORT GENERATOR, FULL COMPATIBILITY WITH WORDPRO 4™ FILES, AND MUCH, MUCH MORE! EMINENTLY USABLE BY NOVICE USERS.

MAJOR USES INCLUDE:
• MAILING LIST MANAGEMENT • QUERY/CALL INFORMATION • A/R AGING MANAGEMENT • CASH FLOW FORECASTS • FILE MANAGEMENT • ANY PROJECT/PROBLEM THAT REQUIRES INVENTORY DATA OR FILE MANIPULATION!

CALL FOR DATASOURCE LITERATURE!

$495

***Requires DOS 2.0 or DOS 2.5**

AVAILABLE TO DEALERS FROM MICROAMERICA

WordPro 4 is a registered trademark of Professional Software Inc.

NEECO
679 Highland Ave.
Needham, MA
02194

Mon-Fri 9:30-5:30
MasterCharge &
Visa Accepted
(617) 449-1760
Telex: 951021


MICROAMERICA DISTRIBUTING
"Nationwide distributors of Computer Equipment"
21 Putnam Street
Needham, MA
02194
(617) 449-4310

Circle 117 for NEECO

Circle 118 for Microamerica

NEECO PROUDLY INTRODUCES

ALTOS COMPUTERS

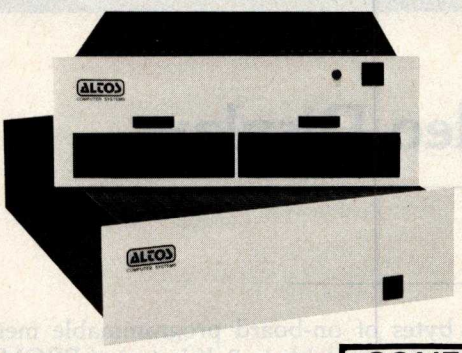

ALTOS ACS 8000-5

- Dual 8" floppy disks
- Megabyte storage
- 64K RAM
- Totally expandable to Hard Disk (29MB) and Multi-User

ALTOS OFFERS OUR USERS TOTAL SYSTEM CAPABILITIES AND FLEXIBILITY . . .

- Z80 based • CP/M • Multi-User
- Hard Disk • Seven languages
- MP/M • NEECO system support
- Full Word Processing

$5990

"ALTOS Computers offer you System Flexibility and Reliability"

CONTACT NEECO FOR ADDITIONAL INFORMATION ON HOW ALTOS CAN BECOME YOUR COMPUTER SOLUTION.

Altos computers range in price from less than $3000 to over $14,000. Altos Computer Systems' capabilities range from single disk-single user to 29 Megabytes-Multi-User.

ALTOS computers are distributed to Dealers/OEMs in the N.E. Region by MICROAMERICA

SUPERBRAIN SOFTWARE

(Business Packages written in MicrosoftBASIC)

Trial Tested Osborne Business Packages on the Superbrain

• Accounts Receivable	$250.00
• General Ledger	$250.00
• Accounts Payable	$250.00
• Payroll Package	$250.00

Complete 4 Module Package $795

MicrosoftBASIC $325

SUPERBRAIN

32K RAM $2795
64K RAM $2995
FORTRAN $ 450

SPECIAL OFFER!
Purchase a 64K Superbrain at $2995 and will include MBASIC5 for only $250! (regularly $350)

SPECIAL OFFER! - Purchase a Centronics 704-9 (RS232, 180 CPS, retail $2380) printer and a 64K Superbrain together for only $4595 - cash price only.

"The Superbrain is ideal for use as an intelligent terminal or stand alone microcomputer system for OEM's, commercial customers, and other sophisticated computer users."



- Two 5.25" Shugart Minifloppies with over 300 K (CP/M Version 2.2 or later) Disk Storage.
- Integrated in a single compact housing.
- CP/M operating System with MBASIC5 and other interpreters/compilers available.
- 32K or 64K RAM models available.
- 2 I/O Ports - one fully enabled RS232 port for communications. Other port for RS232 serial printer output.
- Too many software packages are now available to list them here.

OEM/DEALER INQUIRIES

All pricing and specifications are subject to change.

$2995

SUPERBRAIN™

The Honor Graduate

NEECO
679 Highland Ave.
Needham, MA
02194

Mon-Fri 9:30-5:30
MasterCharge &
Visa Accepted
(617) 449-1760
Telex: 951021

MICROAMERICA DISTRIBUTING
"Nationwide distributors of Computer Equipment"
21 Putnam Street
Needham, MA
02194
(617) 449-4310

Circle 119 for NEECO

Circle 120 for Microamerica

Product Review

The MicroAngelo Video Display

Mark Dahmke
1515 Superior St
Lincoln NE 68521

Introduction

The MicroAngelo high-resolution raster graphics display stands well above other S-100 graphics displays in its price and performance range. Since the MicroAngelo is actually a single-board microcomputer, a great number of functions that previously had to be performed by the host computer are now done in *firmware* on the graphics board. Rather than using the memory-address space of the host as a graphics display buffer (32 K bytes in this case), the host communicates with the MicroAngelo through two parallel ports with simple yet powerful commands. The MicroAngelo decodes these commands and automatically performs the desired functions independently of the host processor. With this parallel-processing capability, system response time is greatly enhanced.

Hardware Overview

The MicroAngelo consists of a Z80A microprocessor with 32 K bytes of on-board programmable memory and 4 K bytes (expandable to 8 K bytes) of PROM (programmable read-only memory) firmware. The board contains all hardware necessary to generate a 512 by 480 dot black-and-white display for a television monitor (10 MHz bandwidth or greater). The board communicates with the host through two parallel ports which may be addressed to any of eight blocks of ports from hexadecimal 00 to F0. The video monitor may be connected via composite video (RS-170 standard) or direct-drive transistor-transistor-logic-level video, horizontal and vertical synchronization.

The MicroAngelo has four possible interrupt sources: data from host, data to host, light pen, and 60 Hz timer. Whenever a data byte is sent by the host or the host reads a data byte sent to it, an interrupt will occur in the MicroAngelo. An interrupt will occur when the light pen is fired and also when the timer produces a pulse. Of these four possible interrupts only the data from host and light pen sources is usually enabled.

At a Glance

Hardware: *MicroAngelo high-resolution graphics display.*

Use: *High-resolution raster-scan graphics display which may be used to draw character or graphics images on a standard television monitor.*

Manufacturer: *Scion Corporation*
8455-D Tyco Rd
Vienna VA 22180
(703) 827-0888

Price: *The MicroAngelo graphics board and firmware (the S-100 board only) is $1095. Also available is the Graphics Subsystem which includes the MicroAngelo S-100 board, a graphics keyboard (IBM Selectric-style keyboard with some special function keys) and a high-resolution 15-inch monitor. Cost: $2495. A light pen is optional.*

Features: *The MicroAngelo S-100 board generates a 512 by 480 dot black-and-white raster display. Communication between the MicroAngelo and the host computer is facilitated by two parallel ports. The MicroAngelo also has a dumb terminal emulation mode.*

Firmware: *PROM (programmable read-only memory) firmware is provided on-board the MicroAngelo. High-level commands may be sent via parallel ports. Such functions as "turn on dot" or "draw vector" are implemented by single commands. The on-board Z80 intercepts these commands and performs the desired functions.*

Hardware required: *Any S-100 mainframe computer or any computer which has an S-100 bus adapter. Although the MicroAngelo uses a Z80 microprocessor, the host processor need not be 8080/Z80 compatible.*

Documentation: *An eighty-page user's manual is supplied.*

Audience: *Anyone requiring high-resolution intelligent graphics on a small system.*

Circle 121 on inquiry card. →

New

S-100 A/D & TIMER

New

Tecmar's new A/D and Timer Board is designed to meet sophisticated data acquisition needs. The board can accommodate various A/D modules providing options such as 12, 14, 16 bit accuracy; 100 MHz throughput; variable ranges and gains. It contains a powerful timer circuit (AMD 9513) which can start A/D conversion and can also be used independently for time of day, event counting, frequency shift keying and many other applications.

TM-AD200 FEATURES

- Complies with IEEE S-100 specifications
- Transfers data in 8 or 16 bit words
- 30 KHz throughput standard
- 12 bit accuracy standard
- Jumper-selectable for 16 single-ended or 8 true differential channels
- External trigger of A/D
- Provision for synchronizing A/Ds
- Data overrun detection
- Data is latched providing pipelining for higher throughput
- Input ranges: ±10V, ±5V, 0 to +10V, 0 to +5V
- Output formats: Two's complement, binary, offset binary
- Auto channel incrementing
- I/O or memory mapped
- Utilizes vectored interrupt or status test of A/D
- Provision for expansion to 256 channels

TIMER FEATURES

- 5 independent 16 bit counters (cascadable)
- 15 lines available for external use
- Time of day
- Event counter
- Alarm comparators on 2 counters
- One shot or continuous frequency outputs
- Complex duty cycle and frequency shift keying outputs
- Programmable gating and count source selection
- Utilizes vectored interrupt

TM-AD200 OPTIONS

- Programmable gain up to 500
- 14 bit accuracy
- 16 bit accuracy
- Screw terminal and signal conditioning panel with optional thermocouple cold junction compensation
- 100 KHz throughput with 12 bit accuracy
- Low level, wide range (10mV to 10V FSR) permitting low level sensors such as thermocouples, pressure sensors and strain gauges to be directly connected to the module input

TECMAR INC.

TECMAR, INC.

(216) 382-7599

23414 Greenlawn • Cleveland, OH 44122

If your data acquisition needs are simple, the original Tecmar S-100 A/D Board will meet your needs.

$495

TM-AD100 FEATURES

- Complies with IEEE S-100 specifications
- 16 single-ended or 8 true differential channels
- 12 bit accuracy
- 25 KHz throughput
- I/O or memory mapped
- Input ranges: ±10V, ±5V, 0 to +10V, 0 to +5V
- Minimal software required.

For digital to analog conversion, Tecmar's D/A Board provides four independent 12 bit high speed D/A channels.

$395

TM-DA100 FEATURES

- Complies with IEEE S-100 specifications
- 4 independent digital to analog converters
- 12 bit accuracy
- 3 μsec settling time
- I/O or memory mapped
- Output ranges: ±2.5V, ±5V, ±10V, 0 to +5V, 0 to +10V

S-100 BOARDS

8086 CPU W/vectored interrupts	$450
RAM 8Kx16/16Kx8	$395
8086 PROM-I/O	$495
Serial and Parallel I/O	$350
Parallel I/O & Timer	$350

[1]Reg. Trademark of Tandy Corp.
[2]Reg. Trademark of Commodore

TRS-80[1] **PET[2]**

A/D

- 12 Bit
- High Speed
- 8 Ch. Differential
- 16 Ch. Single-ended
- Each A/D Module $495

KIM[2] **APPLE**

D/A

- 12 Bit
- High Speed
- 4 Channel

Each D/A Module $395

TRS-80 or PET expansion board, power supply, and enclosure $200.
Kim expansion board and power supply $150.

S-100 Real Time Video Digitizer

- Digitizes and Displays in 1/60 sec, flicker-free
- 16 Gray Levels
- Switch Selectable to display Black and White Graphics (8 pixels/byte)
- Maximum Resolution: 512 pixels/line x 240 lines
- Minimal software requirements

$850

Data Acquisition Systems and Video Microcomputer Systems Available

A connector is provided for the light pen interface. Several commercially available light pens will work with the MicroAngelo.

Jumper Options

Several on-board jumpers are provided for special applications. For example, it is possible to increase the clock speed of the Z80A microprocessor (and hence the speed of the board) from 4 MHz to 5 MHz, assuming that all the components are capable of operating at that speed. Interrupts (as previously discussed) may be enabled or disabled. The number of visible scan lines may be changed from the default 480 to 448 lines. If this option is chosen, the user is responsible for display management. The PROM sockets may be jumped to either the default 1 K byte per PROM or 2 K bytes per PROM.

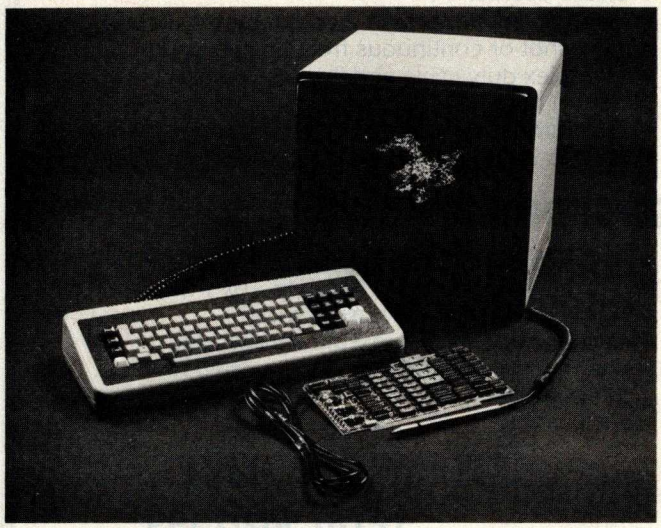


Photo 1: *The MicroAngelo Graphics Subsystem. Included in the subsystem are the MicroAngelo S-100 board, the 15-inch high-resolution black-and-white monitor, and a special keyboard that has an IBM Selectric-style layout plus some special function keys on the far left and right. The light pen is optional.*

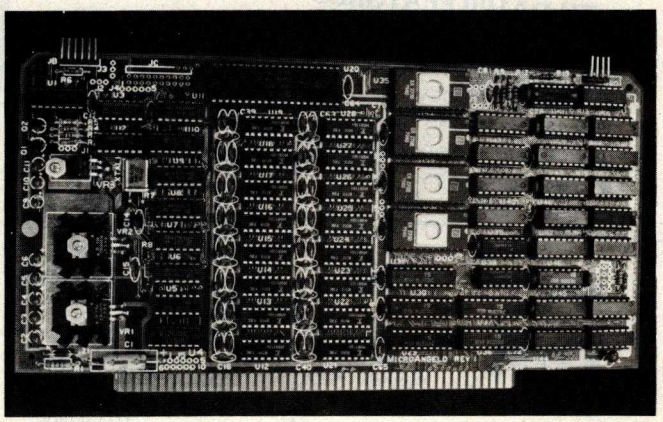


Photo 2: *A close-up of the MicroAngelo S-100 board. The board has a Z80A microprocessor, 32 K bytes of memory, and four 2708 PROMS (expandable to 8 K bytes 2716 PROMs). The board is actually a stand-alone 32 K computer. The video display generates 512 by 480 dots. In the ALPHA mode, up to 85 by 40 characters may be displayed on the screen.*

Adapting MicroAngelo to Non-S-100 Systems

Since the MicroAngelo uses a simple parallel-port interface to the host system, it may be attached to almost any host system. Data is transferred via the eight parallel input and eight output lines of the S-100 bus connector. Power is supplied through pin 1 (+8 V), pin 2 (+18 V), pin 52 (−18 V), and pin 50 (ground). Address bus lines A7, A6, A5, A4 and pDBIN may be tied permanently high (+5 V); A1 and pWR are tied low (ground). A0 is connected to the host to select whether port 0 or 1 is addressed. (MicroAngelo uses two ports.) sINP and sOUT are connected to the host as input-and-output-control command lines. Using this twelve-line interface, the MicroAngelo becomes a stand-alone graphics display device. If interrupts are required, they may be easily added to the above set of signals.

Firmware

The MicroAngelo firmware is what makes the board so powerful. It takes all the work out of designing software and applications programs for the MicroAngelo. The Screenware Pak I is a well-integrated firmware package that allows the board to be used as a terminal emulator, a graphics display, or both.

If a byte is sent to the MicroAngelo (via the parallel port), it is interpreted by the firmware in one of two ways. If bit 7 (the most significant bit) is turned on, the byte is seen as a command. If it is off, the firmware treats it as an ASCII character and passes it to the terminal or ALPHA mode program.

In the text mode, the board will display forty lines with eighty-five characters per line. Text and graphics may be mixed on the screen. In the dumb terminal mode, the firmware will respond to the following control codes: backspace, horizontal tab, line feed, form feed, carriage return, escape, and delete.

Several features are available in the terminal mode. It is possible to display black-on-white or white-on-black characters, for example. Underlining may be turned on and off, and character overstriking may be allowed or disallowed. Two fonts are available, the standard character set or a user-defined font. The winking cursor may be displayed or inhibited, and the scroll mode may be changed. Scrolling may be done on a line-by-line basis, or, to improve response time, block scrolling may be done. Cursor addressing is available — rows run from 0 to 39, columns from 0 to 84. It is also possible to query the firmware to obtain the current cursor location.

Graphics-Mode Commands

The display may be manipulated in many ways in the graphics mode. First, the graphics cursor may be set to a value, read or queried, or set to the contents of the alpha cursor and vice versa. The format for most graphics-mode commands is:

<Command> <xh> <xl> <yh> <yl>

where *xh* and *xl* are the high and low bytes of the X coordinate and *yh*, *yl* are the high and low bytes of the Y coordinate respectively (in hexadecimal). The coordinates (384,256) would be sent as:

<Command> <01> <80> <01> <00>

THE NEXT GENERATION OF MICROCOMPUTERS IS HERE AT QUASAR DATA PRODUCTS



16 BIT POWER
Z-8000[3]

AND STILL RUN YOUR 8 BIT SOFTWARE

8 BIT POWER
Z-80[4]



IF YOU see it our way then we think we have the products for you:

- The S-100 bus is here to stay. It is not the greatest but with proper termination it works reliably at high speeds, and since it is now an IEEE standard, it is well defined.
- The 8 BIT systems are useful but they are the limiting factor for many applications.
- The 16 BIT systems are the way future systems will go. Why not? There is very little price difference and an order of magnitude performance difference.
- The real usefulness of the 16 BIT microprocessors will be determined by the software.
- The systems using 5¼ inch disk drives really do not have adequate memory storage or computer power for many business or scientific applications.
- Sixty-four kilobytes of addressable RAM, the maximum for 8 BIT systems, is not adequate for many business or scientific applications.
- It is not worth buying 8 BIT systems or boards now if you can get the same software with 16 BIT systems at about the same price.
- The new 16 BIT microprocessors have power comparable to minicomputers but do not require the same overhead in terms of downtime, maintenance, or initial investment. They are more versatile in many applications such as real time applications.

THIS IS WHAT QDP HAS AVAILABLE:

- A Z-8000 Board that can plug into your existing S-100 Bus System (see below for description)
- A complete Z-8000 System (see below for description).
- A Z-8000 System configured for your exact needs.
- Software to allow you to run all the available Z-80/8080 software including CP/M.
- Software that includes a Monitor, Debugger, Disassembler, and Basic.
- Software options: a) Extended Monitor, b) Simulators for 8080, Z-80, 6800, 6502, 1802.
- A Z-80 System (QDP-100) that is upward compatible with the Z-8000.

THIS IS WHAT IS COMING FROM QDP:

- A 128 kilobyte RAM card.
- UNIX[2] operating system.

Z-8000 SERIES 16 BIT CPU S-100 BOARD – CAN BE PLUGGED INTO YOUR EXISTING SYSTEM $695.00

- Fully S-100 IEEE compatible.
- Supports existing 8 BIT memory and 8 BIT peripheral boards.
- Capable of reading and/or writing 8 BIT, 16 BIT, or mixes 8 BIT and 16 Bit memories automatically.
- 8 BIT and/or 16 BIT peripheral modules can simultaneously co-exist in the same bus without any modifications.
- Capable of operating as a slave processor to enable your existing CPU to control the Z-8000.

Industrial Quality

- Supports either segmented CPU or non-segmented CPU.
- Power-on and reset jump dip switch selectable.
- Jumper selectable 2 or 4 MHz. operation.
- Dip switch selectable number and type of wait states.

SOFTWARE

- Z-80 emulator enables you to execute your existing 8 BIT software **without** any modifications and allows you to run CP/M immediately.
- Extended Monitor, Debugger, Disassembler.

QDP-8100 WITH 2 MEGABYTES STORAGE STANDARD (OPTIONAL 4 MEGABYTES)

- Z-8000 series 16 BIT CPU S-100 Board - see above

SOFTWARE (Provided with system)

- CP/M 2.2[1] operating system
- Basic
- Z-80/8080 Emulator
- Monitor, Debugger, Disassembler software
- Optional software: Pascal
- UNIX[2] operating system coming

$6,395.

SYSTEMS

QDP-100 WITH 2 MEGABYTES STORAGE STANDARD (OPTIONAL 4 MEGABYTES)

- Z-80 series 8 BIT CPU S-100 Board (4 MHz. Z-80, Double density disk Controller, 2716 Prom Burner 2 Parallel & 2 Serial Ports, real time clock)

SOFTWARE (Provided with system)

- CP/M 2.2[1] operating system
- Basic
- Accounts Receivable, General Ledger, Accounts Payable, Payroll with Cost Accounting
- Optional software: Fortran, Pascal, Cobol, C

$4,995.

EACH SYSTEM CONTAINS:

• Intelligent CRT terminal (80 characters X 24 lines) • 64 kilobytes RAM • Two 8 inch, double sided, double density floppy disk drives with controller • 2 serial and 1 parallel (2 parallel for QDP-100) ports • Attractive woodgrain cabinet with power supplies and cabling

FULL TECHNICAL SUPPORT FROM THE STAFF AT QUASAR DATA PRODUCTS

4 Mhz 64K Dynamic RAM

16K - $250.00 32K - $350.00 48K - $450.00 64K - $549.00

TELETEK DBL. DENSITY, DBL. SIDED

Disk Controller Board..... $395.00

QUASAR FLOPPY SYSTEM

• Two MFE DBL sided drives • Cable • Case & Power Supply assembled and tested Wood cabinet $1895.00




QUASAR 2 MEG FLOPPY

- 2 MFE double sided drives
- Teletek disk controller board
- Power supply & cable
- Wood cabinet
- CP/M version 2.2 & bios
- Assembled & tested $2295.00

Dealer Inquiries Invited. Hours:9-5:30 M-F

Specifications Subject To Change



PAPER TIGER

Includes Graphics $949.00
Cable for TRS-80 ..... $39.00
Call for Apple

MFE Double Sided - Double Density 8" Floppy Disk Drives. (the best) $650.00
Using the Teletek Controller under CP/M, THIS DRIVE WILL GIVE YOU ALMOST ONE MEGABYTE PER DISK DRIVE.
Power supply for above $110.00

TI - 820

Serial Printer -
Full package options... $1995.00

[1]CP/M™ Digital Research [2]UNIX™ Bell Lab [3]Z-8000™ Zilog [4]Z-80™ Zilog

Checks, money orders accepted
Add $2.50 freight charges on orders under 10 lbs. Over 10 lbs. F.O.B. Cleveland


WE HONOR master charge THE INTERBANK CARD


VISA


QUASAR DATA PRODUCTS


10330 Brecksville Rd., Brecksville, OH 44141 (216) 526-0838 or 526-0839


Circle 122 on inquiry card.

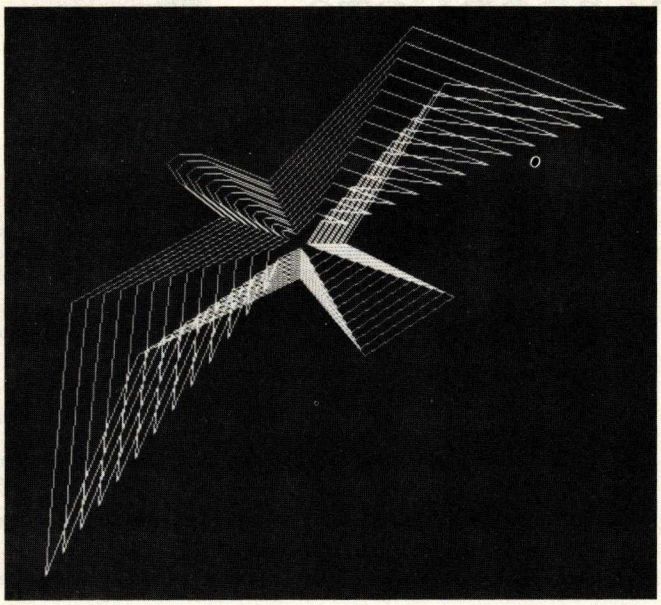

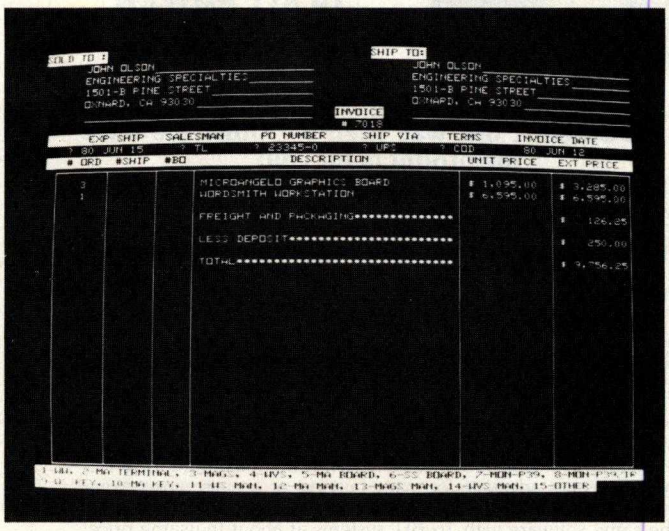

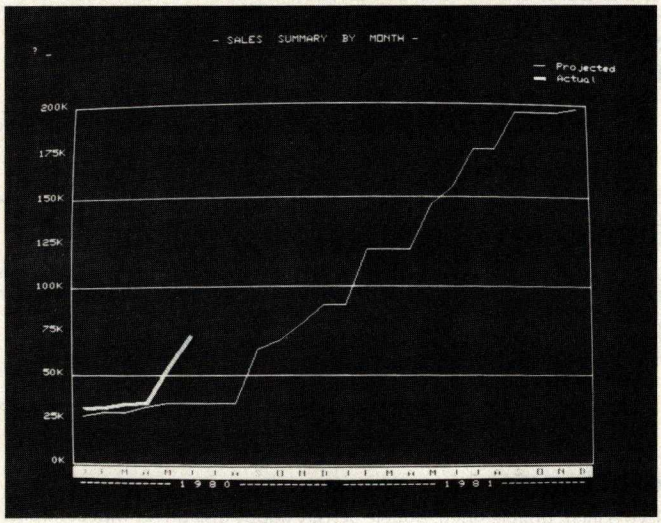

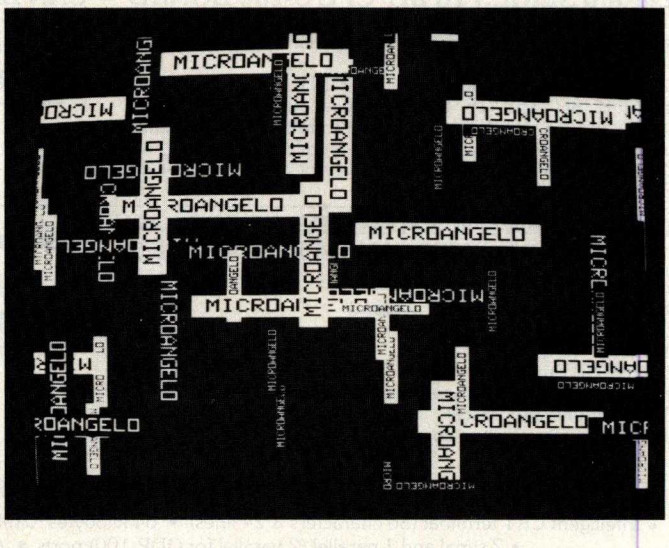

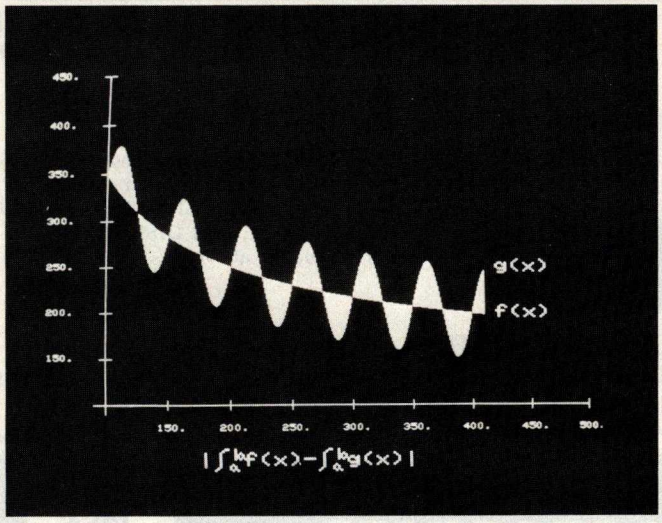


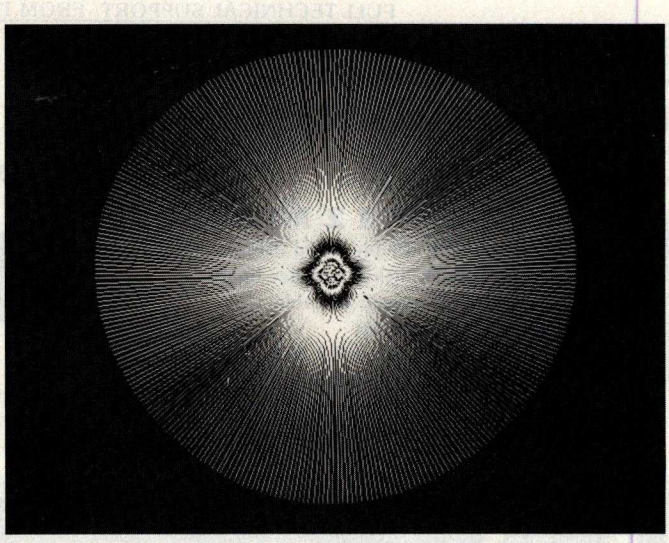


Photo 3a, 3b, 3c, 3d, 3e, 3f: *Sample displays produced with the MicroAngelo graphics board. Vectors may be drawn with single high-level commands.*

AUTOMATED EQUIPMENT INCORPORATED

Toll-Free Ordering
1-800-854-6003 Outside Calif.
714-739-4701 Inside Calif. Outside Cont. USA







TERMINALS

TELEVIDEO 912B	$698
TELEVIDEO 912C	698
TELEVIDEO 920B	748
TELEVIDEO 920C	748
SOROC IQ-120	695
ZENITH A-19	850
HAZELTINE 1500	850


NORTHSTAR


HRZ-1-32K-D	$1990
HRZ-2-32K-D	2295
HRZ-1-32K-Q	2450
HRZ-2-32K-Q	2690
ADDITIONAL 16K RAM	365
ADDITIONAL 32K RAM	565
HARD DISC SYSTEM	3935


DM6400 64K RAM MAY BE SUBSTITUTED FOR ASM 32K NORTHSTAR FOR $140. NORTHSTARS WITHOUT MEMORY AVAILABLE.

PRINTERS

NEC 5510 (TRACT., RIB., THIM)	$2600
NEC 5515 (TRACT., RIB., THIM)	2700
NEC 5520 (TRACT., RIB., THIM)	2900
NEC 5530 (TRACT., RIB., THIM)	2600
MALIBU	2295
TI-810	1495
TI-820	1640
EPSON MX80	CALL
ANADEX DP-8000	795
ANADEX DP-9500	1345





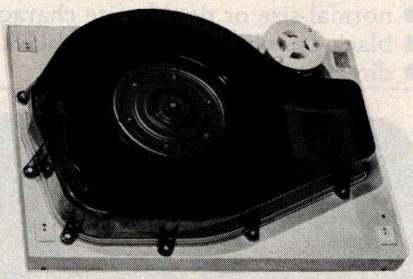

BOARDS

	KIT	ASM
CB2 Z80CPU	$200	$265
VB1C VIDEO	140	190
VB2 VIDEO	155	210
VB3 VIDEO	375	440
IO4 INTERFACE	165	225
SB1 SYNTHESIZER	195	270

MEASUREMENT SYSTEMS MEMORY

DM 3200 32K 4MHZ	480
DM 6400 64K 4MHZ	595
DMB3200 32K 4MHZ BANK SELECT	630
DMB6400 64K 4MHZ BANK SELECT	745

DYNABYTE

DB 8/1 48K	$ 2395
DB 8/1 64K	2715
DB 8/2 48K	3900
DB 8/2 64K	4200
DB 8/4 SINGLE	3030
DB 8/4 DUAL	3830
10M WINCHESTER	4630
32M PHOENIX	11800
64M PHOENIX	15000
96M PHOENIX	18000

MORROW

DISCUS-1 1 DRIVE	$ 815
DISCUS-1 2 DRIVE	1465
DISCUS 2D 1 DRIVE	970
DISCUS 2D 2 DRIVE	1635
DISCUS 2+2 1 DRIVE	1265
DISCUS 2+2 2 DRIVE	2245
DISC JOCKEY 1	190
DISC JOCKEY 2D	350
DISCUS M26 HARD DISC	3990
ADDITIONAL HARD DISC	3685

SOFTWARE

WORDSTAR	$350
MAILMERGE	100
DATASTAR	250
N.S. PASCAL	175
MAGIC WAND	290
CBASIC	100
BOOKKEEPER	800

ADDITIONAL DISCOUNTS FROM OUR SOFTWARE PRICES WHEN PURCHASING A SYSTEM FROM US

GRAHAM-DORIAN		STRUCTURED SYS	
JOB COSTING	$700	ACCTS REC	$700
INVENTORY	475	ACCTS PAY	700
CASH REG	475	GEN LEDG	700
APARTMENT	475	PAYROLL	700
MEDICAL	700	INVENTORY	425

MISC

NEC THIMBLES	$ 16
NEC RIBBONS	6
RS 232 CABLE 5'	20
RS 232 CABLE 10'	25
LEDEX MONITOR	125
NOVATION CAT	165

DISCS-BOX OF 10

VERBATUM 5¼	1 SIDE	$27
VERBATUM 5¼	2 SIDE	45
VERBATUM 8	1 SIDE	35
VERBATUM 8	2 SIDE	55
OTHERS		CALL

We will try to beat any advertised price.

Automated Equipment Inc.
Suite #D
4341 W. Commonwealth Ave.
Fullerton, Calif. 92633

OPEN MON-FRI 8 AM TO 5 PM

TERMS: All prices listed are cash discounted and are subject to change or withdrawal. Credit cards and COD's are accepted at 2% additional handling charge. Universities and Well Rated Firms NET-10.

SHIPPING: ADDITIONAL IN ALL CASES.

TECH. ASSISTANCE: WE TRY TO HELP INTERFACE AND TROUBLESHOOT CALL 714-739-4701

Circle 123 on inquiry card.

Replacing <Command> with <84> would cause the firmware to set the graphics cursor to (384,256) on the screen. Some commands have no operands such as "clear screen". It is possible, with one command, to toggle the screen figure/ground. This means that every dot on the screen will be complemented (ie: reversed). If a dot is *on* (white), it will be turned *off* (black) and vice versa.

Individual dots may be turned on, off, complemented or queried. The form of this group of commands is also:

<Command> <xh> <xl> <yh> <yl>

In the case of the query command, the response is a single byte from the firmware with a value of 1 or 0.

A vector, the next level of sophistication, may also be turned on, off or complemented. The endpoint of the vector is specified in the command, and the starting point is assumed to be the current value of the graphics cursor.

It is also possible to work with *regions* of the display. If we wish to turn on all dots in a box with corners (X1,Y1), (X2,Y1), (X1,Y2), (X2,Y2) the command:

<95> <x1h> <x1l> <y1h> <y1l>
<x2h> <x2l> <y2h> <y2l>

would be sent. Regions may also be turned off or complemented.

Characters may be *plotted* depending on the graphics cursor and the mode selected for graphics characters. Options available include:

- normal-size or double-size characters
- black-on-white or white-on-black
- direction and orientation

TWICE THE BYTE!



8" DISK CONTROLLER
NOW—DOUBLE SIDED OPTION!

- DOUBLES APPLE][STORAGE
- APPLE DOS COMPATIBLE
- SHUGART 800 OR 850 COMPATIBLE
- IBM 3740 DATA ENTRY CAPABILITY
- CP/M, UCSD PASCAL CAPABILITY

Available at your local APPLE Dealer: $400.

SVA
SORRENTO VALLEY ASSOCIATES
11722 SORRENTO VALLEY RD.
SAN DIEGO, CA 92121

Alternate characters may be defined. When the ALPHA mode alternate-character-set option is employed, sending an ASCII character to the firmware will display the alternate character instead of the standard font character. To define the character, the following sequence of bytes must be sent:

<9A> < asc> <s11> <s10>
<s9> ... <s1> <s0>

where 9A is the command, "asc" is the ASCII character code assigned to the character, and s11, s10, ... s0 are the twelve scan lines (6 bits wide) that make up the character in a 6 by 12 dot array.

Using the Light Pen

The light pen provides a convenient means of entering data or drawing on the screen without having to enter numeric coordinates. The coordinates of the pen may be read directly, along with a flag indicating whether or not the pen has been fired since it was last queried. Cross hairs may be displayed at any point on the screen when using the light pen. Another set of commands allows the cross hairs to be displayed, moved, and queried without regard to the light pen.

Memory Uploading/Downloading

Several commands are provided for dumping and loading the screen, thus allowing the user to save images on disk and restore them for later viewing or editing. Memory blocks may be examined or deposited allowing quick loading of alternate character fonts or user-written code. The firmware allows the user to deposit Z80 instructions in unused blocks of on-board memory. The user code may be defined as an op code and thereafter treated as just another firmware command.

Concerning Gray Levels and Color

The one drawback of the MicroAngelo is that it does not have gray levels — meaning the ability to have levels in between black and white or on and off. However, I was informed by Scion that another product, as yet unnamed, is available. This is another S-100 board which mixes the output of three or more MicroAngelo boards to produce *color, gray levels, or both*; four colors can be obtained with as few as two boards.This scheme does require more than one MicroAngelo board, but compared to other graphics displays with 512 by 480 resolution, this approach is still cost-effective. The board does offer interesting possibilities: 256 gray levels, the 256 possible hues or colors, and the winking of dots on an individual dot basis. Also, it is possible to use the winking effect to alternate between two colors.

Conclusions

The MicroAngelo video display system provides quality high-resolution graphics capabilities to S-100 bus (or similar) microcomputer systems, with an exceptional price-to-performance ratio.

On-board firmware provides a simple but powerful set of commands that makes system integration easy.

Although the board is designed to run on the S-100 bus, it can be easily adapted to almost any other bus or input/ouput port organization and does not require an 8080 or Z80 host computer. ■

Circle 124 on inquiry card.

PMC-80

Level II 16K at $645



SOFTWARE COMPATIBLE

- Reads all Level II BASIC tapes
- Reads all SYSTEM tapes
- Full range of peripherals
- Video output for monitor and TV
- Optional FASTLOAD at 8000 baud
- Optional Upper/Lower case

The PMC-80 is a "work-alike" computer to the popular TRS-80* Model I, Level II by Tandy, Radio Shack. The PMC-80 has 16K bytes of RAM and the complete Level II 12K BASIC ROM by Microsoft that makes it 100% software compatible with programs from Radio Shack and from the hundreds of other independent suppliers. The built-in cassette player reads standard Radio Shack programs for the TRS-80.*

The PMC-80 will operate with any of the many peripherals Radio Shack and other independent vendors have invented to plug into the TRS-80.* Most importantly, the Interface Adapter permits Expansion Interfaces with memory expansion to 48K to be added. An Expansion Interface will also permit the addition of Radio Shack compatible 5¼" disks and disk operating systems, RS 232, printers, etc.

Sold through computer stores.

*TRS-80 is a registered trademark of Tandy, Radio Shack.

Personal Micro Computers, Inc.

475 Ellis Street, Mountain View, CA 94043 (415) 962-0220

Circle 125 on inquiry card.

The Age of Affordable Pers



In 1978 Ohio Scientific introduced a revolutionary new low cost computer — the Superboard II. This computer provides all important personal computer features on a single board at a cost of under $300. The Superboard II received rave reviews by microcomputer experts such as:

"We can heartily recommend the Superboard II computer system for the beginner who wants to get into microcomputers with a minimum of cost. Moreover, this is a 'real' computer with full expandability."
POPULAR ELECTRONICS MARCH, 1979

"The Superboard II weighs in at $279 and provides a remarkable amount of computing for this incredible price."
KILOBAUD MICROCOMPUTING FEBRUARY, 1979

"The Superboard II and its fully dressed companion the Challenger 1P series incorporate all the fundamental necessities of a personal computer at a very attractive price. With the expansion capabilities provided, this series becomes a very formidable competitor in the home computer area." INTERFACE AGE APRIL, 1979

"The graphics available permit some really dramatic effects and are relatively simple to program . . . The fact that the system can be easily expanded to include a floppy means that while you are starting out with a low-cost minimal system, you don't have to throw it away when you are ready to go on to more complex computer functions. At $279, Superboard II is a tough act to follow." RADIO ELECTRONICS JUNE, 1979

"The Superboard is an excellent choice for the personal computer enthusiast on a budget." BYTE MAY, 1979

Since the introduction of Superboard II, the cost of personal computers has actually gone up with new models by major manufacturers ranging from $1000 to well over $4000 due to the general cost of inflation and the increasing functionality included in these computers. Today Cleveland Consumer Computers is offering you the original Superboard II at its original price of just $279. In today's economy this is by far the best buy in personal computing ever!

The Superboard II can entertain your whole family with spectacular video games and cartoons, made possible by its ultra high resolution graphics and super fast BASIC. It can help you with your personal finances and budget planning, made possible by its decimal arithmetic ability and cassette data storage capabilities. It can assist you in school or industry as an ultra powerful scientific calculator, made possible by its advanced scientific math functions and built-in "immediate" mode which allows complex problem solving without programming! This computer can actually entertain your children while it educates them in topics ranging from naming the Presidents of the United States to tutoring trigonometry — all possible by its fast extended BASIC, graphics and data storage ability.

The machine can be economically expanded to assist in your business, remotely control your home, communicate with other computers and perform many other tasks via the broadest line of expansion accessories in the microcomputer industry.

This machine is super easy to use because it communicates naturally in BASIC, an English-like programming language. So you can easily instruct it or program it to do whatever you want, but you don't have to. You don't because it comes with a complete software library on cassette including programs for each application stated above. Ohio Scientific also offers you hundreds of inexpensive programs on ready-to-run cassettes. Program it yourself or just enjoy it; the choice is yours.

The Superboard II comes fully assembled and tested. It requires +5V at 3 Amps and a video monitor or TV with RF converter to be up and running. $279.00

Standard Features:

- Uses the ultra powerful 6502 Microprocessor.
- 8K Microsoft BASIC-in-ROM. Full feature BASIC runs faster than currently available personal computers and all 8080 based business computers.
- 4K static RAM on board expandable to 8K.
- Full 53-key keyboard with upper/lower case and user programmability.
- Kansas City standard audio cassette interface for high reliability.
- Full machine code monitor and I/O utilities in ROM.

Circle 126 on inquiry card.

onal Computing is Still Here.



Mini-Floppy Disk Drive

Direct access video display has 1K of dedicated memory (besides 4K user memory), features upper case, lower case, graphics and gaming characters for an effective screen resolution of up to 256 x 256 points. Normal TV's with overscan display about 24 rows of 24 characters without overscan up to 30 x 30 characters.

Optional Extras:

- Available 610 expander board features up to 24K static RAM (additional), dual mini-floppy interface, and an OSI 48 line expansion interface.
- Assembler/Editor and Extended Machine Code monitor available.
- 630 I/O Expander.
  RGB color and NTSC composite color outputs with up to 16 colors, Dual 8-axis joystick interface, AC remote control interface which mates with AC-12P, home security interface which mates with the AC-17P, 16-line parallel I/O interface, 16-pin I/O bus interface which allows the connection of parallel I/O lines or high speed analog I/O module, or a PROM blaster or solderless interface prototyping board, programmable sound generator and program selectable modem and high speed printer ports, and more.

Freight Policies All orders of $100 or more are shipped freight prepaid. Orders of less than $100 please add $4.00 to cover shipping costs. Ohio Residents add 5.5% Sales Tax.

Guaranteed Shipment Cleveland Consumer Computers & Components guarantees shipment of computer systems within 48 hours upon receipt of your order. **Our failure to ship within 48 hours entitles you to $35 of software, FREE.**


master charge VISA

Hours:
Call Monday thru Friday
8:00 AM to 5:00 PM E.D.T.

Software:


Ohio Scientific and independent suppliers offer hundreds of programs for the Superboard II, in cassette and mini-floppy form. Here is a sampling of popular Ohio Scientific programs for the Superboard II.

EDUCATIONAL PROGRAMS	SBII & C1P	Price
BASIC Tutor Series	SCE-336	$35.00
Clock Tutor	SCE-353	6.50
Continents Quiz	SCE-332	6.50
Definite Integral	SCE-326	6.50
French Drill & Tutor	SCE-339	6.50
German Tutor & Drill	SCE-342	6.50
Hangman (8K)	SCE-324	9.00
Log Tutors 1-3	SCE-344	6.50
Math Blitz	SCE-329	6.50
Math Intro	SCE-319	6.50
Mathink	SCE-337	9.00
Matrix Tutors 1-3	SCE-345	6.50
Metric Tutor & Quiz	SCE-335	6.50
Spanish Drill & Tutor	SCE-352	6.50
Spelling Quiz	SCE-333	6.50
Trig Tutor (8K) I & II	SCE-318	6.50
BUSINESS PROGRAMS		
Address Book	SCB-523	9.00
Advertisement Demo	SCB-520	6.50
Inventory Demo	SCB-518	6.50
Mailing List (8K)	SCB-524	6.50
Straight & Constant Depreciation	SCB-500	9.00
Time Calculator	SCB-525	9.00
PERSONAL PROGRAMS		
Biorhythm	SCP-716	9.00
Calorie Counter	SCP-708	6.50
Checking Account	SCP-719	9.00
Loan Finance	SCP-717	6.50
Personal Calendar	SCP-718	6.50
Savings Account	SCP-720	9.00
GAME PROGRAMS		
Baseball I	SCG-975	6.50
Black Jack	SCG-955	6.50
Civil War	SCG-977	6.50
Destroyer	SCG-951	6.50
High Noon	SCG-960	6.50
Hockey	SCG-979	6.50
Lander	SCG-925	6.50
New York Taxi	SCG-956	6.50
Poker	SCG-962	6.50
Racer	SCG-949	6.50
Space War	SCG-942	6.50
Star Trek	SCG-946	6.50
Star Wars	SCG-926	6.50
Tic-Tac-Toe	SCG-945	6.50
Tiger Tank	SCG-950	14.00



610 Board

CS-600

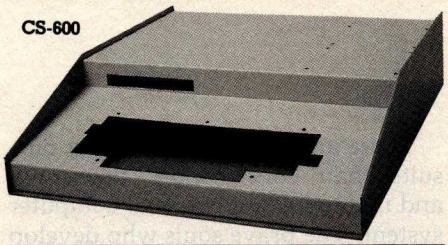

Hardware:

Superboard II	as specified in the advertisement.	$279
610 Board	For use with Superboard II and Challenger 1P, 8K static RAM expandable to 24K or 32K system total. Accepts up to two mini-floppy disk drives. Requires +5V@ 4.5 amps.	298
Mini-Floppy Disk Drive	Includes Ohio Scientific's PICO DOS software and connector cable. Compatible with 610 expander board. Requires +12V@ 1.5 amps and +5V@ 0.7 amps.	299
630 Board	As specified in the advertisement.	229
AC-3P	12" combination black and white TV/video monitor.	159
4KP	4K RAM chip set.	79
PS-005	5V 4.5 amp power supply for Superboard II.	35
PS-003	Mini-floppy power supply.	29
C1P Sams	C1P/Superboard II Manual.	8
OS-65D	V3.2 Disk Operating System with 9-digit extended BASIC, random access and sequential files.	49
CS-600	Metal case for Superboard II, 610 and 630 board and two power supplies.	49
CS-610	Metal case for single floppy disk drive and power supply.	49
AC-12P	Wireless AC remote control system. Includes control console, two lamp modules and two appliance modules for use with 630 board.	175
AC-17P	Home security system. Includes console, fire detector, window protection devices and door unit for use with 630 board.	249
C4P Sams	C4P Manual.	16
C3 Sams	Challenger III Manual.	40

To Order:
Or to get our free catalog **CALL 1-800-321-5805 TOLL FREE.** Charge your order to your **VISA** or **MASTER CHARGE** ACCOUNT Ohio Residents Call: (216) 464-8047. Or write, including your check or money order, to the address listed below.

CLEVELAND CONSUMER COMPUTERS & COMPONENTS
P.O. Box 46627
Cleveland, Ohio 44146

Order Form:

CLEVELAND CONSUMER COMPUTERS & COMPONENTS
P.O. Box 46627 Cleveland, Ohio 44146

☐ Superboard II $279.
☐ 610 Board $298.
☐ Mini-Floppy Disk Drive $299.
☐ 630 Board $229.
☐ AC-3P 12" B-W Monitor $159.
☐ C1P Sams Manual $8.

(Attach separate sheet for other items.)

NAME:_____

ADDRESS:_____

CITY:_____ STATE:_____ ZIP:_____

Payment by: VISA: __ MASTER CHARGE: __ MONEY ORDER: __

Credit Card Account #_____

Expires:_____ Interbank # (Master Charge)_____

TOTAL CHARGED OR ENCLOSED: $_____ (Ohio Residents add 5.5% Sales Tax)

All orders shipped insured UPS unless otherwise requested. FOB Cleveland, Ohio.

Getting to Know Your Monitor

Ron Dalpiaz
308 High St Box 573
Tuscarawas OH 44682

There are few more satisfying pursuits than constructing, operating, and maintaining a personal computer system. The brave souls who develop their systems from discrete kits, preferring to assemble the "ideal" combination of peripherals, can feel justifiably proud of their accomplishments.

Inevitably, system failures will occur and can usually be remedied by personal knowledge and help from numerous books and articles on computer-circuit theory. But one frequently neglected area is the operational theory of the most used human-to-computer interface: the monochrome video monitor.

The video monitor is a basic part of most personal computer systems. The theory described here applies to converted television receivers and professional monitors. The two differ mostly in the video amplifier's frequency response and the cathode-ray-tube phosphor color: a professional monitor has a greater frequency response and a green phosphor. Additionally, the professional monitor has no tuner, intermediate frequency amplifier, video detector, sound or AGC (automatic gain control) sections, which are necessary in the broadcast receiver. The latter must have these sections rendered inoperable or selectively switched out when used as a monitor. Our discussion will assume a professional monitor with direct video entry.

The Picture Tube

The fundamental part of the video monitor is the CRT (cathode-ray tube). Various circuits are used to *deflect* and *modulate* the beam.

Figure 1 shows the elements found in the modern picture-tube electron-gun assembly. 6.3 V applied to the heater causes electrons to be emitted or "boiled off" from the cathode surface. The electrons are pulled toward the phosphorus screen by the high positive potential existing at the accelerating anode surrounding the bell of the picture tube. Typically,

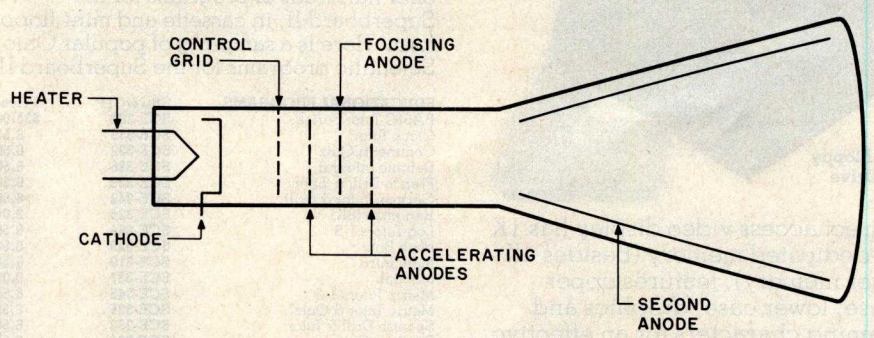


Figure 1: *Internal structure of a cathode-ray tube. The electron beam is emitted by the cathode when it is heated. Electrons are attracted to the screen by a high voltage (12 kV to 20 kV) on the second anode.*

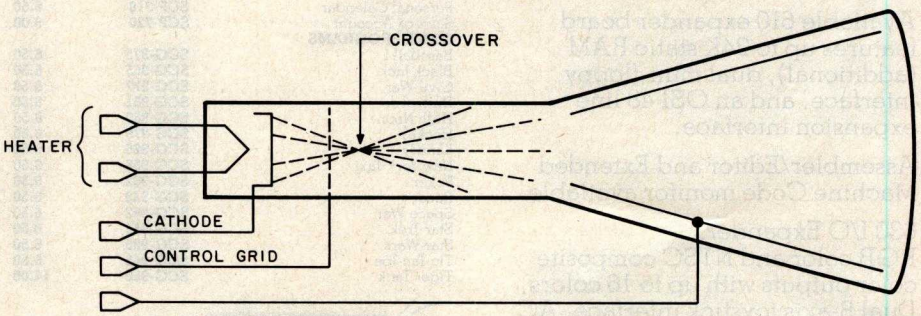


Figure 2: *The crossover effect. Two accelerating anodes, in conjunction with the focusing anode, are used to give a sharp beam and a well-defined screen image. Without the focusing arrangement, the electron beam diverges and splatters.*

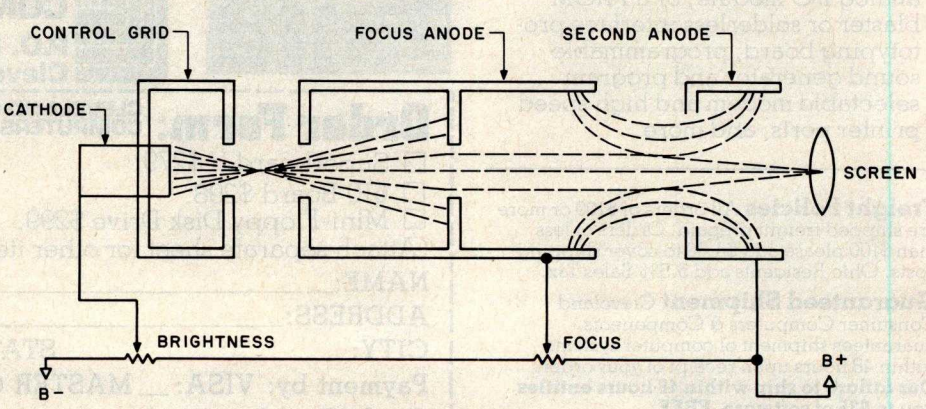


Figure 3: *Focusing the beam. By applying the proper potentials to the anodes and control grids, the electron beam can be "squeezed" to a pinpoint, for displaying the image on the screen.*



What do you need?

Program listings . . . inventory listings . . . custom logos and letters . . . mailing labels in a multitude of sizes . . . custom forms and the data to complete them . . . curve plotting or bar graphs . . . digitized images from video or bit pads . . . multi-part forms . . . preprinted forms . . . tickets . . . and the list goes on . . .

How do we do it?

High speed bi-directional full logic printing; two standard character sets, upper/lower case with descenders; high speed font at 165 cps; letter quality font at 90 cps; expanded characters, solid underlining; programmable character sets; complete dot control graphics; adjustable tractor feed 3"-16"; user adjustable platen; programmable tabs, forms length and line spacing; out of paper signal; self-test; interface options — RS-232C, Centronics parallel, Apple, S-100; and the list goes on . . .

The Malibu Model 165

Find out if it's the easy solution to your hard copy needs — contact your local computer dealer or you can write or call us today for complete specifications and print samples — you won't be disappointed.

Versatility, Quality and Reliability: We build it in.

malibu
Electronics Corporation

Dealers and OEM'S, call us about our new purchase programs with prices, terms and delivery to meet your needs too.

2301 Townsgate Road, Westlake Village, CA 91361 (805) 496-1990

a subsidiary of **Datametrics Corporation**

Circle 127 on inquiry card.

voltages of 12 kV to 20 kV are fed to this anode from the monitor's high-voltage section.

The emitted electrons pass through various control grids and arrive at the screen in the form of a luminescent dot. The brilliance of the dot is controlled by adjusting the potential at the control grid. A voltage more negative than the cathode surface decreases the beam brilliance, while a more positive voltage increases the beam brilliance. Varying the control-grid voltage modulates the beam and produces the shades of black and white that form the picture elements on the monitor screen.

The two accelerating anodes, in conjunction with the focusing anode, are used to give a sharp, well-defined screen image. Without these anodes, the electron beam, after passing through the control grid, would encounter *crossover* and become broad and splattered, as shown in figure 2.

By applying the proper potentials to the accelerating anodes and the focus anode, the beam is squeezed and formed into a well-defined pinpoint suitable for displaying the images on the screen. This result is shown in figure 3.

Deflection Circuits and Rastering

The processes described so far would result in a black screen with a single bright dot in the center of the picture tube. The first step in obtaining a display on the screen is to pull the electron beam from side to side; this illuminates a line on the screen. The beam can be moved from top to bottom, in order to illuminate a whole screen of lines. If this is done rapidly enough, this will produce illumination over the entire area of the picture tube. This process is called *rastering*, and the dimly illuminated screen with no data information present is called the raster.

The *deflection yoke* consists of electromagnetic coils arranged in a vertical and horizontal configuration and is fitted around the picture tube neck; it is the primary device used for deflecting the electron beam. To move the beam from the top to the bottom of the screen (vertically), a rapidly rising (and more rapidly falling) sawtooth-current waveform is passed through the vertical windings of the yoke. Figure 4 shows a sawtooth waveform produced by a typical vertical circuit and the resultant vertical sweep of the beam.

As the current rises (Time A), the buildup of magnetic flux causes the beam to be swept from the top to the bottom of the screen. When the sawtooth reaches maximum value, it rapidly falls to 0 (Time B), causing the beam to be *retraced* from the bottom back to the top of the screen, where the process begins again. During the beam sweep from top to bottom, the trace is visible, but during the retrace the beam is cut off by the *retrace blanking circuitry* to avoid undesirable retrace lines from showing. Vertical sweep of the beam normally occurs 60 times per second.

The sawtooth wave is produced in an oscillator and amplifier section of the television monitor and is fed to the vertical windings of the deflection yoke 60 times per second. Vertical beam deflection, if used alone, would result in a bright vertical line in the center of the darkened screen. To complete the rastering process, the beam must also be deflected from left to right, and this is accomplished by the horizontal circuitry.

The horizontal windings in the deflection yoke are also fed with a sawtooth current originating in the horizontal oscillator and output circuitry. The frequency of this sawtooth is 15,750 Hz. The rising sawtooth current is passed through the horizontal windings in the yoke, causing the beam to be deflected from the left to the right side of the picture. The beam is then cut off by the *horizontal blanking circuitry*, and the rapidly falling sawtooth current sweeps the beam back to the left side of the screen to repeat the process. Figure 5 illustrates a typical horizontal oscillator and deflection circuit and the resultant screen trace.

The horizontal sawtooth voltage is produced by the horizontal oscillator and output section. The sawtooth is coupled into a horizontal output transformer before being fed to the deflection yoke windings. The main purpose of this transformer is to produce the high voltage necessary for the accelerating anode at the picture tube. The rapidly falling sawtooth voltage present during beam retrace is fed to the horizontal output transformer which steps it up to a

Text continued on page 212

FINDING SOLUTIONS AND BEING COMPETITIVE IS OUR BUSINESS.



apple computer
Authorized Dealer

Having problems and looking for a computer to help solve them? Are you finding computer dealers come in one of two ways? Either Full system support with Full price or Take it or Leave it with Low price. At Omega we don't believe that you should have to make a choice. Yes, we're in business to sell products but also, to solve your problems. Our prices will be the lowest possible. Our support and product quality will be second to none. Check out our Mail Order prices in this ad (our retail prices will be higher). See if you don't agree with our first claim. For our second claim, call us with your data processing needs and problems. Better yet, come in and see us. Finding solutions and being competitive is our business. We never forget either of them.

APPLE II "PLUS" 16K	**$ 929.95**
48K	**1079.95**
Apple II Accessories:	
Disk II with Contorller	$485.00
Disk II 2nd drive	435.00
Graphics Tablet	665.00
Language System with PASCAL	395.00
Silentype Printer w/Int	489.00
Integer Firmware Card	152.00
Z-80 Softcard	259.00
Videx Videoterm 80 col Card	279.00
Sanyo 12" Green Monitor	179.00

Calculators: ($2.00 shipping charge)

Hewlet Packard			
HP-85	**CALL**	HP-41C	$269.00
HP-67	$299.00	HP-97	589.00
HP-34C	127.00	HP-38C	127.00
Texas Instruments			
TI-58C	109.00	TI-59	209.00
Cannon			
P10-D	80.00	P7-D	80.00
Sharp			
6200	98.00	5813	35.00
5100	89.00	5102	80.00


Mail Order Terms of Sale: Price based on prepaid orders. Visa or Master Charge orders may have service charge added to purchase price. No COD's. Allow 14 working days for personal and company checks to clear. All orders (unless specified in ad) within Continental U. S. shipped U.P.S. no charge. APO or out of Continental U. S. write or call for shipping charges. All prices subject to change and all offers subject to withdrawl without notice. CA residents add 6% sales tax.

OMEGA MICRO COMPUTERS

The Problem Solving Company 3447 Torrance Boulevard • Torrance, California 90503 • (213) 370-9456

Circle 128 on inquiry card.

Now NRI takes you inside the world's most popular microcomputer to train you at home as the new breed of computer specialist!

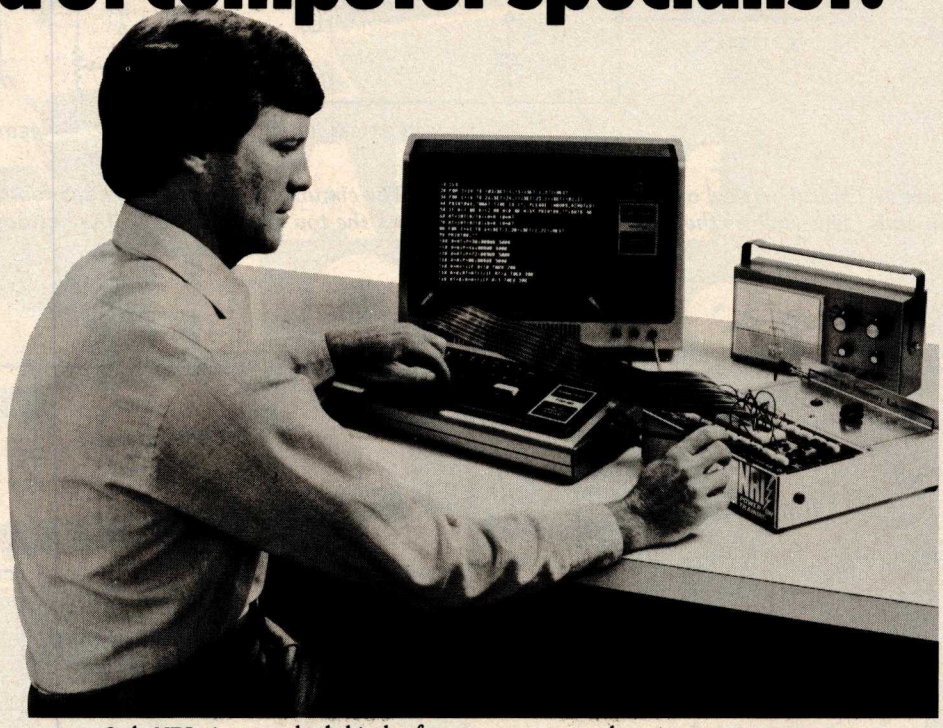

NRI teams up with Radio Shack to teach you how to use, program and service microcomputers...make you the complete technician.

It's no longer enough to be just a programmer or a technician. With microcomputers moving into the fabric of our lives (over 200,000 of the TRS-80™ alone have been sold), interdisciplinary skills are demanded. And NRI can prepare you with the first course of its kind, covering the complete world of the microcomputer.

Learn At Home in Your Spare Time

With NRI training, the programmer gains practical knowledge of hardware, enabling him to design simpler, more effective programs. And, with advanced programming skills, the technician can test and debug systems quickly and easily.



Training includes TRS-80 computer, transistorized volt-ohm meter, digital frequency counter, and the NRI Discovery Lab with hundreds of tests and experiments.

(TRS-80 is a trademark of the Radio Shack division of Tandy Corp.)

Only NRI gives you both kinds of training with the convenience of home study. No classroom pressures, no night school, no gasoline wasted. You learn at your convenience, at your own pace. Yet you're always backed by the NRI staff and your instructor, answering questions, giving you guidance, and helping you over the tough spots.

Explore the TRS-80 Inside and Out

NRI training is hands-on training, with practical experiments and demonstrations as the very foundation of your knowledge. You don't just program your computer, you introduce and correct faults ...watch how circuits interact...interface with other systems...gain a real insight into its nature.

You also build test instruments and the NRI Discovery Lab, performing over 60 separate experiments in the process. You learn how your trouble-shooting tools work, and gain greater understanding of the information they give you. Both microcomputer and equipment come as part of your training for you to use and keep.

Send for Free Catalog... No Salesman Will Call

Get all the details on this exciting course in NRI's free, 100-page catalog. It shows all equipment, lesson outlines, and facts on other electronics courses such as Complete Communications with CB, TV and Audio, Digital Electronics, and more. Send today, no salesman will ever bother you. Keep up with the latest technology as you learn on the world's most popular computer. If card has been used, write to:

NRI Mc Graw Hill

NRI Schools
McGraw-Hill Continuing Education Center
3939 Wisconsin Avenue
Washington, D.C. 20016.

Circle 131 on inquiry card.

Buy an Atari 800 16K for




$747

and your savings have just begun:


add'l 16K Ram	$139.95	Joysticks	$14.95
add'l 8K Ram	$84.95	Star Raiders	$39.95
410 Program Rec.	$59.95	29.95 Rom Packs	$19.95

COMPUTERS



Horizon II 32K DD*	$2399
Horizon II 32K Quad*	$2799
Industrial Micro 5000 D.D.	$2499
Altos ACS-8000-5	$4995
Zenith (Heath) Z-89, 48K	$2299
Dynabyte DB 8/1 48K	$2345
TI 99/4 w/Monitor	$899

PRINTERS



Okidata Microline 80	$546
Comprint GP (Apple, TRS-80)	$495
Paper Tiger w/graphics	$879
MPI 88T	$624
Centronics 737	$829
Diablo 630	$2349
NEC 5510	$2589

TERMINALS



P.E. Bantam (w/non-glare)	$689
Soroc IQ 120 (Pre-tested)	$749
Televideo 912C	$749
Televideo 920C	$799
Hazeltine 1500	$899
Visual Tech 200	$945

HOW TO ORDER

Mail-Order Only

2% cash discount incl. Prices subject to change. Product subject to availability. Az. residents add 5%. F.O.B. Scottsdale. Factory Warranties included.

*Our Horizons are better than their Horizons, call us, we'll tell you why.

Scottsdale Systems

6730 E. McDowell Road #103
Scottsdale, Az. 85257
Open 6 to 6 PM - M-Sat.

VISA MasterCard

(602) 941-5856

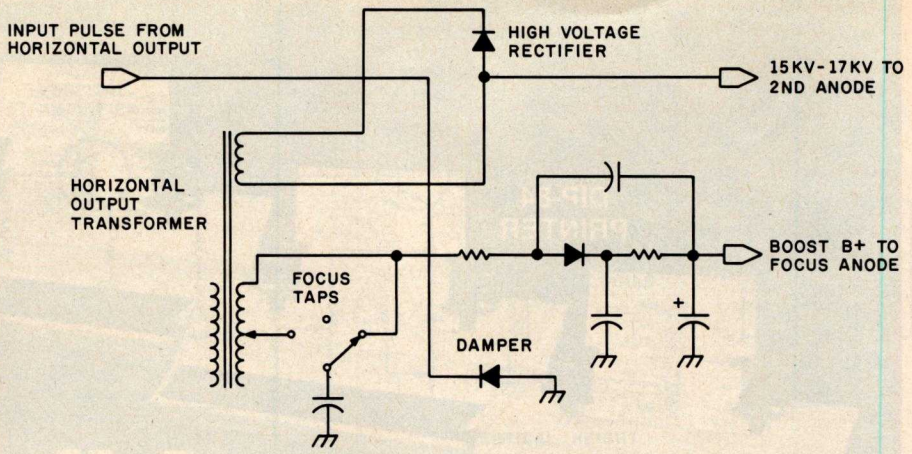


Figure 6: *Typical high-voltage circuit. High-frequency AC from the horizontal-deflection circuitry is also used to produce the high voltage supplied to the focusing and second anodes. After passing through a step-up transformer, the AC is rectified and filtered for use in various other circuits.*

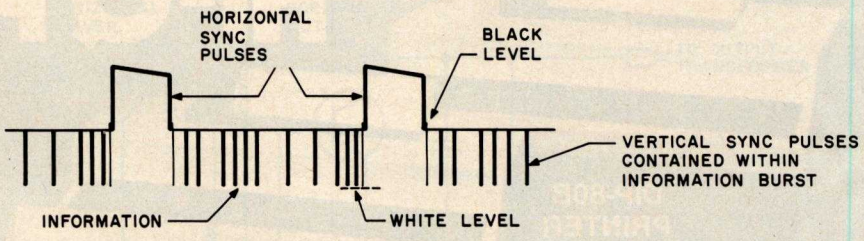


Figure 7: *Composite video signal. The signal sent to most video displays contains large pulses used to keep the horizontal oscillator in time with the picture information. The picture information is essentially an on/off control of the electron beam. In most video monitors, a low pulse turns the beam on, illuminating a dot on the screen; an intermediate voltage turns the beam off.*

Text continued from page 208:

very high potential. This pulsating high voltage is then rectified, filtered, and applied to the picture tube anode. Various taps on the transformer give alternate circuit voltages, including the focus voltage. Figure 6 illustrates a typical high-voltage circuit.

The production of high voltage to accelerate the electron beam combined with the horizontal and vertical deflection of the beam all work together to produce a dimly illuminated raster on the screen.

Interlaced Scanning

A careful study of the raster reveals the precision with which it is produced. The raster is usually composed of 525 finely spaced parallel horizontal lines, approximately 480 of which are visible within the viewing area of the picture tube. The number of lines and the scanning method used depend on the particular video interface used, and I will assume a high-quality monitor used with a video system outputting sixty-four or more characters per line.

The vertical oscillator and output section utilize an interlaced scanning method which traces 262.5 lines across the screen in 1/60 second, then returns to trace a second set of 262.5 lines *between* the previous lines. Each set of lines is called a field, and the two fields combined produce one complete data picture or frame. When the electron beam is modulated to produce a picture, one frame occurs once each 1/30 second, and thirty complete pictures occurring each second are sufficient to give the illusion of a continuous display. Exceptions to this process are video-interface techniques which do not interlace their fields but which trace a complete picture in one field. The 60 Hz scan rate can also vary.

The Composite Video Signal

In order to synchronize the monitor's vertical and horizontal oscillators with the video-interface output, a composite video signal or separate video and synchronization signals are coupled to their respective stages. The purpose of the syn-

Suddenly, RCA makes talking to your computer a lot cheaper.

New interactive data terminal with color graphics—only $369.*



RCA's new VP-3301 is a professional quality, ASCII encoded, interactive data terminal, suitable for a wide variety of industrial, educational, business and individual applications requiring interactive communication between computer and user. Connects directly to your computer or to a standard modem for over the phone access to time sharing networks and data bases. And it's compatible with networks such as those provided by CompuServe Information Services and Source Telecomputing Corp. Microprocessor intelligence and LSI video control integrated circuits bring performance, features and flexibility at a low price. Operates from 5 volt power supply (included).

Unique color locking circuitry creates sharp, jitter free, true color graphics and rainbow free characters.

You can display the entire field of characters in any of 8 colors against any of 8 background colors (8 gray scales with monochrome monitors). Or to add special emphasis, you can display individual letters, words or lines in different colors or in reverse video.

The VP-3301 offers you a choice of two software-selectable display formats: Either 40 characters by 24 lines. Or 20 characters by 12 lines.

The terminal's resident character set consists of 52 upper and lower case alphabetics, 10 numerals, 32 punctuation/math symbols and 31 control characters.

You can also define a total of 125 of your own characters. Including: Greek letters and other foreign alphabets, graphic symbols, large graphics building blocks, playing card suits, unique character fonts and "little green men."

The keyboard section features flexible-membrane key switches with contact life rated at greater than five million operations. A finger positioning overlay and positive keypress action give good operator "feel".

An on-board sound generator and speaker provides aural feedback for key presses and may also be activated with escape sequences to provide an audio output.

The sealed keyboard surface is spill proof and dust proof. This, combined with high noise immunity CMOS circuitry, makes the VP-3301 ideal for hostile environments.

Output is industry standard asynchronous RS232C or 20 mA current loop with 6 switch-selectable baud rates and 8 selectable data formats.

You can connect the terminal directly to a 525 line color or monochrome monitor. Or to a standard TV set using your RF modulator.

For more information, contact RCA MicroComputer Marketing, New Holland Avenue, Lancaster, PA.

Or call our toll-free number: 800-233-0094.

*Suggested user price.

RCA

Circle 132 on inquiry card.

Circle 133 on inquiry card.

BKG 10.

The improved version of BKG 9.8, the backgammon playing program that defeated the world backgammon champion by a score of 7-1 at Monte Carlo in July, 1979.

BKG 10. developed utilizing the expertise of Paul Magriel, former world backgammon champion and author of Backgammon, has emerged as one of the best pieces of artificial intelligence software available on microcomputer.



BKG 10. features:

- Version I utilizes direct cursor control for professional display of board, disc, cube, etc.
- Version II adds printer/disc IO of game in progress, enables board set-up at non-standard points and simulation capabilities.
- BKG 10. incorporates advanced SNAC functions (Smooth & Nonlinear Application Coefficients) as described in *(Scientific American, June, 1980).*
- Plays by ABPA Tournament Rules, including: doubling, match play and optionally the Crawford Rule. BKG 10. VI will play either side. VII enables machine — machine play for simulation applications.
- BKG 10. responds quickly, making most moves in under 15 seconds (2 MHz), or 7 seconds (4MHz).
- BKG 10. was written entirely in Z-80 Assembler.

BKG 10. has the additional capability of suggesting moves and doubling decisions.

• SYSTEM REQUIREMENTS •

Z-80 Processor. 32K TPA, CP/M or compatible operating system, cursor addressable video terminal & 8" floppy drive. VII requires printer and additional drive.

BKG 10. $79.00 VI $129.00 VII
single license fee

PRICE INCLUDES:
Two non-copiable diskettes
and a complete 30 page manual.
Software Update subscription available
INTELLIGENCE SYSTEMS LTD., 124 S. DELAWARE STREET
INDIANAPOLIS, IN. 46204 (317) 631-5514

For Mastercard, VISA, or C.O.D. orders only

Call Now: 800-824-7888 TOLL FREE

Alaska/Hawaii 800-824-7919
Ask for Operator 105

BKG 10.

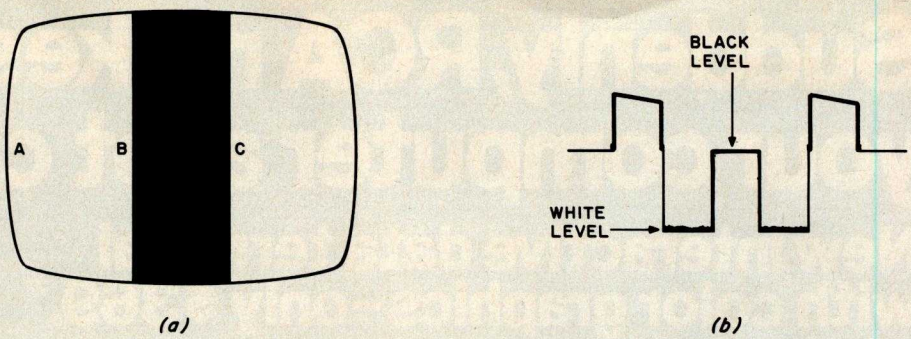


Figure 8: *Sample video display and corresponding composite video signal. The low portion of the composite signal (b) turns on the electron beam to illuminate the screen (a). When the intermediate voltage of the black portion is encountered, the beam is turned off. As the composite signal returns to the low white level, the screen is illuminated again.*

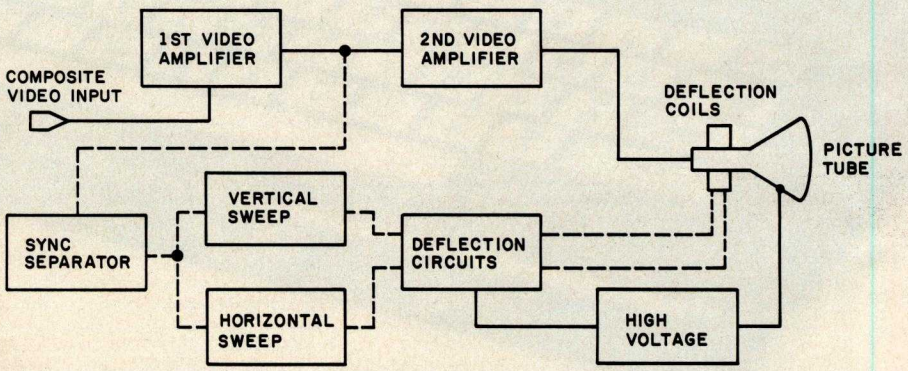


Figure 9: *Block diagram of the signal path in a typical monitor. The solid lines represent actual video information, while the dashed lines indicate the path of synchronization signals.*

chronization signals is to time the vertical and horizontal oscillator stages to the video information fed to the picture tube. Figure 7 is a sketch of the most widely implemented composite video signal.

This signal contains both the horizontal and vertical synchronization pulses (called *sync* pulses) and is applied to the *sync separator* where the horizontal and vertical pulses are separated, amplified, and sent to their respective oscillators to synchronize their respective traces. Included in the vertical sync pulses (assuming interlaced scanning is used) are equalization pulses whose function is to assure that the second field of lines is interlaced with the first.

Electron-Beam Modulation

The last link in the chain to create an image is to modulate the electron beam, turning it on and off to display white dots on the dim raster; this forms the dot matrices arranged as alphanumeric characters. The information contained in the composite video signal is actually a series of voltage reference levels which are amplified in the video amplifier and applied to the control grid or cathode of the picture tube to turn the electron beam on or cut it off. The black field in the display is represented by a voltage near the black level just under the horizontal sync pulse. Figure 7 illustrates this. The white dots in the picture are represented by the white level, or minimum voltage. In scanning the display shown in figure 8a, when the beam begins its trace at point A, the voltage level is minimum, or white as in figure 8b. When point B is reached, the voltage level jumps to the black reference level and cuts off the beam at the picture tube. A black screen is evident. At point C, the beam is on again, and white is presented.

Production of a display on a video terminal is more complex, but the beam is modulated in the same way to produce numerous dots of white

Cromemco
incorporated
Tomorrow's Computers Today

Now.. *Discover Savings and Service with* **EBS** MAIL ORDER DIVISION

ORDER TOLL FREE

- WE ARE PROUD to be an AUTHORIZED CROMEMCO DEALER
- CROMEMCO stands for quality, reliability and obsolescence insurance
- CROMEMCO is widely recognized as a microcomputer industry leader
- CROMEMCO provides strong support for their dealers and end-users
- THE BOTTOM LINE - it's what you buy AND where you buy it . . . WE CARE!

New. . . CROMIX IS HERE!

The exciting new multi-user, multi-tasking operating system with many added capabilities.

New. . . RPG II

Exclusive offering of this important business language by a microcomputer manufacturer

LISP

The language for Artificial Intelligence research

New. . . BUSINESS SYSTEMS SOFTWARE!

General Ledger
Accounts Payable
Accounts Receivable
Inventory

An integrated turnkey system that requires no computer programming knowledge. Produced and supported by Cromemco, and designed to make full use of the advanced features found in Cromemco hardware.

New. . . SYSTEM ZERO!

The S-100 personal computer with Cromemco reliability.

16 FDC

Double density disk controller

New. . . QUADART!

4 port serial I/O

INTELLIGENT I/O CONTROLLER!

On board Z-80

Use these together for results you won't believe!

SYSTEMS:	List	Our Price
SYSTEM 2	3990	3190.
Now double density! Dual double-sided mini floppy disk drives; 64K RAM		
SYSTEM 3	7395.	CALL
Now double density! 2 Mbyte of dual double-sided 8" floppy disk; 64K RAM		
Z-2H	9995.	CALL
Now double density! 11 Mbyte integral hard disk; 2 double-sided 5" floppy disks; 64K RAM		

All Cromemco systems feature the S-100 industry standard bus, 4 MHZ Z-80 CPU, 64K RAM, and can be easily upgraded to multi-user, multi-tasking capability.

PERIPHERALS:

3102 "SMART" TERMINAL
40 function keys; detachable keyboard with 14-key numeric pad

3703 DOT-MATRIX PRINTER
180 CPS; 18-inch platen; 132 columns; bi-directional with double buffering

3355A FULL LETTER PRINTER
55 CPS; 15-inch platen; quality impression suited to camera copy

BOARDS:	List	Our Price
SGL. CARD COMP.	450.	380.
8K BYTESAVERII	245.	210.
32K BYTESAVER	295.	CALL
ZPU	395.	335.
4FDC	495.	420.
64KZ	1785.	1510.
TU-ART	295.	250.
SDI	595.	CALL

High resolution color graphics interface

LANGUAGES:	List	Our Price
COBOL, now updated	95.	90.
FORTRAN IV	95.	90.
MACRO ASSEMBLER	95.	90.
16K BASIC	95.	90.
32K BASIC	295.	275.
DATA BASE MGMT.	95.	90.
WORD PROCESSING	95.	90.
RATFOR	195.	180.
TRACE	95.	90.

EBS BUSINESS SOFTWARE:

GENERAL LEDGER; ACCOUNTS PAYABLE; ACCOUNTS RECEIVABLE; PAYROLL (Calif.); INVENTORY; ORDER ENTRY

List Price $995. each

Customization available

Call or write for our low mail order prices on all CROMEMCO products . . . or on PERSCI disk drives, MEASUREMENT SYSTEMS boards, BASE 2, QUME, SOROC, ADDS, TVI, NEC SPINWRITER or other quality products.

EXECUTIVE BUSINESS SYSTEMS
20457 E. Valley Blvd., Walnut, CA 91789
(714) 594-5736

WE ALSO OFFER:
- Complete analysis of your system needs
- Installation, training, support & maintenance
- Custom applications software

AT OUR REGULAR CONSULTING RATES
Phone inquiries welcome

master charge
VISA

Prices shown are for "Cash with Order"
COLLECT PHONE ORDERS WELCOME or Send check or M.O. (Personal or Co. checks require 2 wks. to clear) Please include phone number. Shipping charges will be added, Within Calif. add applicable sales tax. Factory warranty included. All prices subject to revision.

CDOS® Cromemco, Inc.
CP/M® Digital Research CBASIC™ Compiler Systems

Circle 134 on inquiry card.

(corresponding to data elements sent from the video interface). Alternate methods employ black data elements on a white field. The frequency response of the video amplifier stages determines how fast the beam can be turned on and off; the faster the response, the more data elements can be displayed on each line with good resolution.

Home Television Receivers

The video amplifier section in a professional monitor differs greatly from that in a television receiver. Television receivers can rarely be modified to produce dots of a rate beyond 5 MHz, while monitors can be purchased with from 12 to 100 MHz response. The converted television receiver must have its tuner, intermediate frequency amplifier and sound section switched out when employing direct video input. The limited frequency response generally allows only up to thirty-two characters per line, but the low cost of such receivers makes them an attractive choice.

After injection and amplification of the composite video signal in a television receiver used for video display, the video is separated from the synchronization pulses, and the latter are sent to the synchronization section. The separated video information is then amplified by the video amplifier, coupled to the picture tube, and used to modulate the electron beam. In systems using separate video and synchronization inputs, the vertical and horizontal pulses are not processed in a synchronization separator, but are fed directly to their respective oscillators. The separate video is directly coupled to the video output stage.

Troubleshooting

When all the circuits described above are working in perfect unison and are synchronized by the composite video signal, a stable display will be produced. A malfunction at any stage in the monitor creates a problem peculiar to that particular section. So, what do you do when the monitor fails?

The first step is to obtain a good, accurate schematic of the circuitry (preferably *before* any problems occur). The manufacturer should supply this. Locating problems can be somewhat simplified by considering a monitor as consisting of the sections shown in the block diagram of figure 9. Using this diagram, we can observe the signal flow lines to generally predict the section where the problem may lie. Some symptoms and their solutions will prove helpful.

- No Video or Raster: Assuming that the power supply is functioning, the absence of raster could mean that the electron beam is not being deflected across the picture tube screen. Perhaps no beam is present, so the logical checkpoint is the high-voltage section to see if the beam accelerating potential is present. Use of a high-voltage probe is necessary here.

  If the high voltage is present at the anode of the picture tube, it is best to measure voltages at the control grid and cathode of the picture tube, assuming that a visual check revealed that the heater was lit. Having cleared the picture tube and proving that a beam can be formed, proceed to check the horizontal-sweep section where

32 K BYTE MEMORY

RELIABLE AND COST EFFECTIVE RAM FOR 6502 & 6800 BASED MICROCOMPUTERS

AIM 65-*KIM*SYM


PET*S44-BUS

* PLUG COMPATIBLE WITH THE AIM-65/SYM EXPANSION CONNECTOR BY USING A RIGHT ANGLE CONNECTOR (SUPPLIED) MOUNTED ON THE BACK OF THE MEMORY BOARD.
* MEMORY BOARD EDGE CONNECTOR PLUGS INTO THE 6800 S 44 BUS.
* CONNECTS TO PET OR KIM USING AN ADAPTOR CABLE.
* RELIABLE—DYNAMIC RAM WITH ON BOARD INVISIBLE REFRESH—LOOKS LIKE STATIC MEMORY BUT AT LOWER COST AND A FRACTION OF THE POWER REQUIRED FOR STATIC BOARDS.
* USES +5V ONLY, SUPPLIED FROM HOST COMPUTER.
* FULL DOCUMENTATION. ASSEMBLED AND TESTED BOARDS ARE GUARANTEED FOR ONE YEAR AND PURCHASE PRICE IS FULLY REFUNDABLE IF BOARD IS RETURNED UNDAMAGED WITHIN 14 DAYS.

ASSEMBLED & TESTED	WITH 32K RAM	$395.00
	WITH 16K RAM	$339.00
	WITHOUT RAM CHIPS	$279.00
HARD TO GET PARTS (NO RAM CHIPS) WITH BOARD AND MANUAL		$109.00
BARE BOARD & MANUAL		$49.00

PET INTERFACE KIT—CONNECTS THE 32K RAM BOARD TO A 4K OR 8K PET. CONTAINS: INTERFACE CABLE, BOARD STANDOFFS, POWER SUPPLY MODIFICATION KIT AND COMPLETE INSTRUCTIONS. $49.00

U.S. PRICES ONLY

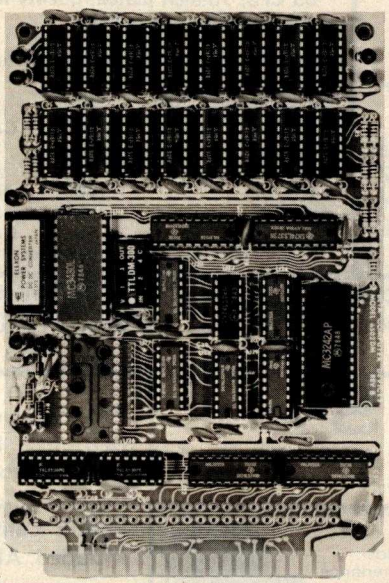

16K MEMORY EXPANSION KIT

ONLY $58

FOR APPLE, TRS-80 KEYBOARD, EXIDY, AND ALL OTHER 16K DYNAMIC SYSTEMS USING MK4116-3 OR EQUIVALENT DEVICES.

★ 200 NSEC ACCESS, 375 NSEC CYCLE
★ BURNED-IN AND FULLY TESTED
★ 1 YR. PARTS REPLACEMENT GUARANTEE
★ QTY. DISCOUNTS AVAILABLE

ALL ASSEMBLED BOARDS AND MEMORY CHIPS CARRY A FULL ONE YEAR REPLACEMENT WARRANTY

BETA COMPUTER DEVICES

1230 W. COLLINS AVE.
ORANGE, CA 92668
(714) 633-7280

Calif. residents please add 6% sales tax. Mastercharge & Visa accepted. Please allow 14 days for checks to clear bank. Phone orders welcome. Shipping charges will be added to all shipments.


Circle 135 on inquiry card.

HÄNDLER CONCESSIONAIRES DISTRIBUIDORES O.E.M.

AUSGEZEICHNETE GROSS = HANDELSPREISE stellen nur einen Aspekt unseres Händlerprogrammes dar. Treten Sie noch heute mit uns in Verbindung. (Wir sprechen Deutsch)




UN EXCELLENT PRIX DE GROS ne représente qu'un seul aspect de notre programme de distribution internationale. Mettez-vous en contact avec nous aujourd'hui pour recevoir plus de renseignements. (On parle français!)



EL EXCELENTE PRECIO AL MAYOREO que ofrecemos representa sólo un aspecto de nuestro programa de distribución internacional. Póngase en contacto con nosotros para información más detallada. (Se habla español!)

A.D.D.S.	IND. MICRO
ANADEX	OKIDATA
APPLE	SOROC
CENTRONICS	SUPERBRAIN
CROMEMCO	TELEVIDEO
HAZELTINE	TEXAS INSTR.



MICRO-COMPUTER BROKERS
INTERNATIONAL
6819-P, North 21st Avenue
Phoenix, Arizona 85015 U.S.A.
Telephone: (602) 242-9961
Telex: (0) 668382

voltages originate which directly or indirectly affect both horizontal and vertical deflections of the beam. The final step would be a check of the deflection system itself.

- No Video — Raster Present: A raster always indicates that vertical and horizontal sweep, deflection, high-voltage and low-voltage sections are working. Assuming a video signal is present, we should investigate all portions of the monitor's video amplifier section, also the picture-tube-control-grid and cathode circuits.
- Raster and Video Present — Vertical Rolling: Assuming the vertical hold control does not stop the vertical roll, this indicates that the vertical oscillator is not in step with the video interface signal. The obvious starting point is the vertical sweep section, particularly the vertical oscillator.
- Raster and Video Present — Horizontal Lines: This problem is very similar to the above vertical problem, except that horizontal lines are the problem. Again, this indicates that the horizontal oscillator is out of step with the video interface circuitry. Investigate the horizontal oscillator to correct this problem.
- Raster, Video Present — Display Rolling and Drifting Sideways: This is both a vertical *and* horizontal problem. Obviously the circuit feeding both horizontal and vertical oscillators is at fault, and this would be the synchronization separator or amplifier. When symptoms or tests indicate one section as the probable point of trouble, proceed to check voltages for direct-current biasing and use an oscilloscope to investigate waveforms.

Troubleshooting is a logical, step-by-step procedure. In repairing your monitor, the screen is the best visual aid you have, and should be utilized to the utmost in preliminary generalizations as to the problem circuit. And troubleshooting a video monitor yourself, whether or not it's homebrew, can give you the satisfaction of knowing your hardware a little bit more.■

Circle 136 on inquiry card.



You can buy wholesale without being a corporate giant. The Purchasing Agent provides a personalized commercial buying service for companies and individuals.

The Purchasing Agent will get you the lowest wholesale price by:

- Aggressively bidding wholesalers against each other on your order,
- Consolidating orders for volume discounts, and
- Using professional buyers' thorough knowledge of the computer market.

The Purchasing Agent will get you the quickest deliveries direct from wholesalers' inventories.

Here are examples of items clients have purchased recently through The Purchasing Agent and the prices paid. (Prices shown include the buying fee.)

COMPUTERS	
Alpha Micro 10 MEG	$11,203
Altos 64K, 1MEG	3,370
Commodore CBM 32K	1,344
Dynabyte DB 8/1 64K	2,480
EXIDY 48K Sorcerer	1,118
HP-85	2,970
North Star Hoz II 32K D.D.	2,332
Super Brain 64K	2,600
TI 99/4	859
Zenith Z-80 16K	1,960
Zenith Z-89 48K	2,214
PRINTERS	
Anadex 9500	$1,204
Base 2	493
Centronics 737	749
Diablo 630	2,139
Diablo 1640 RO	2,622
Intergal Data Paper Tiger	852
NEC 5510 W/Tractors	2,520
Qume Sprint 5 R/O	2,445
TI 810 Basic	1,480
VIDEO DISPLAY	
Hazeltine 1500	$854
Lear Siegler ADM3A +	812
Televideo 912C	685
Televideo 920C	754
Zenith Z-19	798
SOFTWARE	
Ward Star	$275
Magic Wond	220

Over 200 computers, CRT's and printers plus software.

All products are new and carry full manufacturerer's warranty against original defects. Wholesale prices are subject to change without notice. The Purchasing Agent has a minimum fee of $75.00.

THE PURCHASING AGENT
18 Daisy Lane
Orinda, CA 94563
(415) 376-9020


FIRST CLASS Interfacing

CompuPro's feature-packed S-100 I/O boards conform to the IEEE 696/S-100 standard to provide reliable, cost-effective interfacing between your computer and its associated peripherals (such as terminals and printers).

Interfacer I is a dual channel, full RS-232 serial board. Hardware UARTs perform all basic I/O operations, thus freeing the CPU from the need to perform these routines; this increases speed and reliability.


Interfacer II incorporates one channel of serial I/O (identical to an Interfacer I serial port), three full duplex parallel ports for handling I/O data, and a separate full duplex parallel port for status and interrupt control to give unparalleled interfacing flexibility.

Interfacer I

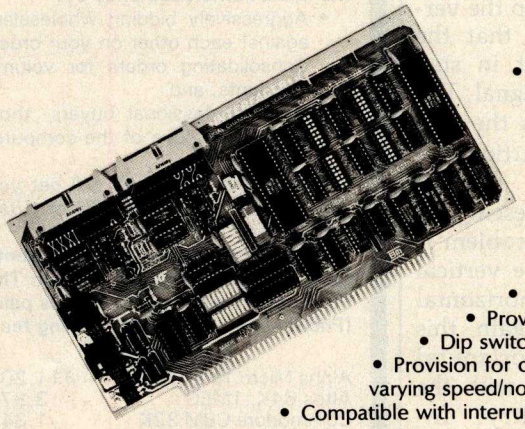

- Dual RS-232 ports with full handshake
- Independently selectable Baud rates for each port, up to 19.2 KBaud – simultaneously drives slow and fast devices (such as teletype/terminal combinations)
- EIA line drivers and receivers
- Conversion to TTL, current loop (20 mA), and RS-232 levels for interfacing to almost any kind of serial device
- On-board crystal timebase for freedom from system clock variations
- Software programmable UART parameters, interrupt enables, and hand shaking lines (handshaking lines are full RS-232 – not just a three wire system)
- Operates with 2 or 4 MHz systems
- Provision for optically isolated current loop for each channel
- Dip switch selectable port addresses
- Provision for custom frequency compensation on both receive and transmit sides (accomodates varying speed/noise situations or unusual cable lengths)
- Compatible with interrupt-driven I/O systems

Interfacer II

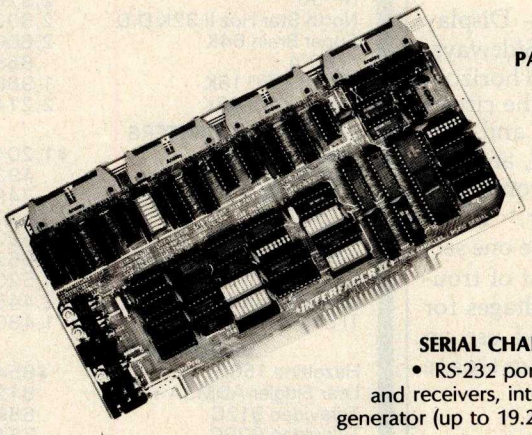

PARALLEL CHANNELS

- Latched input and output data with 24 mA drive current
- Each full duplex port has strobe, attention, and enable bits (each with selectable polarity); an input interrupt; and 16 data lines, giving a three port total of 48 true data lines
- Interrupts for each input port
- Separate 25 pin connectors with power for each channel
- Separate status port for interrupt mask and port status
- No mode selection/initialization required
- Handles Centronics type interface, daisy type printers, and interfaces to A/D converters

SERIAL CHANNEL

- RS-232 port includes all features of an Interfacer I serial channel, such as EIA line drivers and receivers, interfacing to almost any kind of serial device, on-board crystal controlled Baud rate generator (up to 19.2 KBaud), full interrupt capability, etc.
- Works with any software I/O drivers developed for the Interfacer I

Either board costs **$199 unkit** (sockets, bypass capacitors pre-soldered in place), **$249 assembled**, and **$324** qualified under the **C**ertified **S**ystem **C**omponent high-reliability program.

These and other CompuPro products are available at finer computer stores world-wide;

write us direct if there's no store in your area.

TERMS: Californians add tax. Allow 5% for shipping, excess refunded. VISA®/Mastercard® orders call **(415) 562-0636**, 24 hours. Please include street address for UPS delivery.

CompuPro™ from **GODBOUT ELECTRONICS**

Bldg. 725, Oakland Airport, CA 94614

Circle 137 on inquiry card.

Please note: Several of our **unkits** have been significantly reduced in price – however, we must caution that unkits are not intended for novice builders. While assembly is simple, de-bugging may be required to bring up an unkit due to such problems as IC infant mortality. It is assumed that most unkit users will have sufficient test equipment and knowledge to do their own de-bugging; however, factory service for unkits is available for a flat service charge.

CompuPro products are also available **assembled**, or qualified under our high-reliability **C**ertified **S**ytem **C**omponent (**CSC**) program (200 hour burn-in, extensive testing, more).

FULLY STATIC MEMORY

Our memories feature fully static design to eliminate dynamic timing problems, IEEE spec compatibility, 4/5 MHz operation, low power, extensive bypassing, and careful thermal design. CSC memories will run with 10 MHz CPU clock, speeds on the S-100 bus (while drawing half the current of non-CSC boards) to give high speed, ultra-low power operation.

If you're looking for specs – if you're looking for performance – if you're looking for exceptional value, then look no further than the **RAM** series from **CompuPro.**

S-100 RAM XX (with bank select **and** IEEE compatible extended addressing)

	unkit	assm	CSC
16K RAM XX-16	**$319**	**$399**	**$479**
24K RAM XX-24	**$439**	**$539**	**$629**
32K RAM X-32	**$559**	**$699**	**$799**

OTHER S-100 MEMORY

8K RAM IIA	**$159**	**$189**	**$239**
16K RAM XIV	**$279**	**$349**	**$429**

(Includes IEEE compatible extended addressing.)

SBC/BLC MEMORY

32K RAM XI	n/a	n/a	**$1050**

COMPUPRO S-100 MOTHERBOARDS: DESIGNED FOR THE FUTURE, AVAILABLE NOW

Specifically designed to handle the new generation of 5 to 10 MHz CPUs coming on line (as well as present day 2 and 4 MHz systems), these advanced motherboards feature Faraday shielding between all bus signal lines to minimize crosstalk, active termination that splits the termination load between each end of every bus line, and mechanical compatibility with Godbout, Vector, Imsai, TEI, and similar enclosures. Available in **"unkit"** form (edge connectors and termination resistors pre-soldered in place for easy assembly), or fully **assembled** and ready to go.

#CK-024 20 slot motherboard with edge connectors – unkit $174, assm $214

#CK-025 12 slot motherboard with edge connectors – unkit $129, assm $169

#CK-026 6 slot motherboard with edge connectors – unkit $89, assm $129

PASCAL/M + MEMORY SPECIAL

PASCAL – easy to learn, easy to apply – can give a microcomputer with CP/M® more power than many minis. We supply a totally standard **Wirth PASCAL/M 8" diskette** by **Sorcim**, with manual and Wirth's difinitive book on PASCAL, for **$150 with the purchase of any memory board.** Specify Z-80 or 8080/8085 version. **PASCAL/M available separately for $175.** *CP/M is a trademark of Digital Research

OTHER S-100 BUS PRODUCTS

Active Terminator Board . . . . . $34.50 kit

Memory Manager Board . . . . . $59 unkit, $85 assm, $100 CSC

Mullen Extender Board . . . . . $59 kit

Mullen Relay/Opto-Isolator Control Board . . $129 kit, $179 assm

COMING SOON: The kind of startling new RAM development you've come to expect from the memory leader. **Stay tuned!**

CPU-Z: 8 BITS OF Z80A POWER FOR THE S-100 BUS

Superior design in a true IEEE-compatible board (timing specs available on request) gives the power for future expansion as well as system flexibility. Includes all standard Z-80A features along with power on jump/clear, on-board fully maskable interrupts for interrupt-driven systems, selectable automatic wait state insertion, provision for adding up to 8K of on-board EPROM, IEEE compatible 16/24 bit extended addressing, and much more. Works with 6 MHz Z80As; supplied with 4 MHz CPU. **$225 unkit, $295 assm, $395 CSC.**

CPU 8085/88: 16 BIT DUAL PROCESSING POWER FOR THE S-100 BUS

CPU 8085/88 uses an 8088 CPU for true 16 bit power with a standard 8 bit S-100 bus, and an 8085 for compatibility with CP/M and 8080 software. Accesses up to 16 megabytes of memory, meets all IEEE S-100 bus specifications (timing specs available on request), runs 8085 and 8086 code **in your existing mainframe** as well as Microsoft 8086 BASIC and Sorcim PASCAL/M, runs at 5 MHz for speed as well as power, and is built to the same stringent standards that have established our leadership in S-100 bus components. **$295 unkit, $425 assm,** (both operate at 5 MHz); **$525 CSC** (with 5 MHz 8085, 6 MHz 8088).

CPU 8085 (single processor version of above): **$235 unkit, $325 assm, $425 CSC.**

SPECTRUM S-100 COLOR GRAPHICS BOARD

Includes 8K of IEEE-compatible static RAM; full duplex bidirectional parallel I/O port for keyboard, joystick, etc. interface; and 6847-based graphics generator that can display all 64 ASCII characters. 10 modes of operation, from alphanumeric/semi-graphics in 8 colors to ultra-dense 256 × 192 full graphics. 75 Ohm RS-170 line output and video output for use with FCC approved modulators. **$339 unkit, $399 assm, $449 CSC.** You don't have to settle for black and white graphics or stripped-down color boards; specify the **CompuPro Spectrum.**

Want graphics software? **Sublogic's 2D Universal Graphics Interpreter** (normally $35) is yours for **$25** with any Spectrum board purchase.

2708 S-100 EPROM BOARD **$85 unkit**

4 independently addressable 4K blocks, with dipswitch selectable jump start built right into the board. Includes all support chips and manual, but does not include EPROMs.

GODBOUT COMPUTER ENCLOSURE

$289 desktop, $329 rack mount

This handsome enclosure does justice to the finest computer system. Includes dual AC outlets and fuseholder on rear, heavy-duty line filter, and black anodized front panel (with textured vinyl painted cover for desktop version). Pre-drilled base accepts our high-performance S-100 motherboards or types by Vector, California Digital, and others. Rack mount version includes slides for easy pull-out from rack for maintenance or board changing.

NEW LOW PRICE 16K DYNAMIC RAMS – 8/$39 !!

Lowest price ever on one of our most popular items. Expands memory in TRS-80* -I and -II, as well as machines made by Apple, Exidy, Heath H89, newer PETs, etc. Low power, high speed (4 MHz). And $3 for 2 dip shunts plus TRS-80* conversion instructions. **Limited quantity – first come, first served.**

DC ROBOT MOTOR SPECIAL

DC fractional horsepower motor runs on about 1 to 5V. Not a servo motor by any means, but good for experimenting with robots, toys, games, etc. **10/$2.95**

FREE CATALOGUE: Find out more about our product line. For 1st class delivery, add 41 cents in stamps; foreign orders add $2 (refundable with order).

TERMS: Cal res add tax. Allow 5% for shipping, excess refunded. Orders under $15 add $1 handling. VISA®/Mastercard® orders ($25 min) call **(415) 562-0636**, 24 hrs. Please include street address for UPS delivery. Sale prices good through cover month of magazine, other prices subject to change without notice.

VISIT FINER COMPUTER STORES WORLD-WIDE FOR MORE INFORMATION ON THESE OUTSTANDING PRODUCTS, OR WRITE US DIRECT IF THERE'S NO STORE IN YOUR AREA.

CompuPro™ from GODBOUT ELECTRONICS

Bldg. 725, Oakland Airport, CA 94614

Z80 is a trademark of Zilog
TRS-80 is a trademark of the Tandy Corporation
PASCAL/M is a trademark of Sorcim

Circle 137 on inquiry card.

Digital Storage of Images

Thomas Williams
39A Mill St
Maynard MA 01754

The availability of inexpensive computer memory has brought high-resolution gray-scale and color graphics within the reach of the home computer experimenter. Over the last decade the ability to capture video signals in digital form, manipulate the stored data, and display it has moved from military and research engineers to undergraduates and interested hobbyists.

Quantization

Before examining methods of capturing video signals, let's look at image quantization, which is the process of converting an image into one or more arrays of numbers. The value of each array element represents the measure of light present in the area of a corresponding point in the original image. These array or picture elements are called pixels.

A typical gray-scale image might be quantized into a two-dimensional array of values that range from 0 to 15, representing intensity values from black to white. If the array were 256 by 256 elements or 64 K pixels, each with a 4-bit value, the array would occupy 32 K 8-bit bytes of memory.

Scanning

To perform the quantization, the image is scanned by a transducer capable of converting light into an electronic signal. This signal is sampled periodically, and each sample is converted into a numeric value. Transducer sensitivity, scanning rate, and sampling rate all affect the quality and form of the digital image.

There are basically four methods of scanning images. The first requires the movement of the transducer with respect to the image or scene. This is typically done by drum scanners where an image is spun under a light source and photodiode. (See figure 1.)

No matter how much effort is spent on improving the system, the results are only as good as the input.

The second method deflects either a light beam or sensor optics in two dimensions to scan the image. This method is often used in a device called a flying-spot scanner; such devices were used during the first decades of television for transferring movies to video form for broadcast.

The third method is the use of a television camera. In a television tube (ie: a vidicon) the image is focused on a target that is scanned with an electron beam. (See figure 2.) It can be thought of as a CRT (cathode-ray tube) working in reverse.

The fourth method, which is still rather expensive, is the photodiode-array camera. It uses an integrated circuit which contains an array of photodiodes and circuitry to help scan the array. Advantages of this camera over vidicons are the stability of its geometry (as vidicons require electron-beam deflection which is never completely repeatable and accurate) and the inherent immunity to shock (as vidicons are vacuum tubes and thus sensitive to abuse).


Video Costs

As with anything electronic, there are uncontrollable costs of precious metals and precision parts, and controllable costs of design and assembly. Hardware hobbyists with good supplies of parts can usually find clever ways of cutting costs. Most of us, though, have limited resources and must buy kits or search for bargains on assembled equipment. Video cameras sometimes show up at flea markets in various states of repair and can provide you with a good video signal at very low cost. Home-video enthusiasts and closed-circuit security systems have also provided a marketplace for inexpensive cameras.

Cameras with sufficient quality for use with digital image-capture systems can be quite expensive. The increased costs usually provide more geometric linearity and a more uniform imaging-target surface. Black-and-white cameras range in price from about $200 to $10,000. At the lower end of the price scale you can expect about 5% error in the linearity of the vertical and horizontal scanning. Usually these errors are not noticeable. Geometric linearity is only important when the image-capture system is used for a precise geometric task, such as measurement of object size.


Target nonuniformity *is* a source of concern. Inexpensive cameras may have differences in video level (for uniform illumination) across the im-

Why is the 88G Printer the new industry leader?

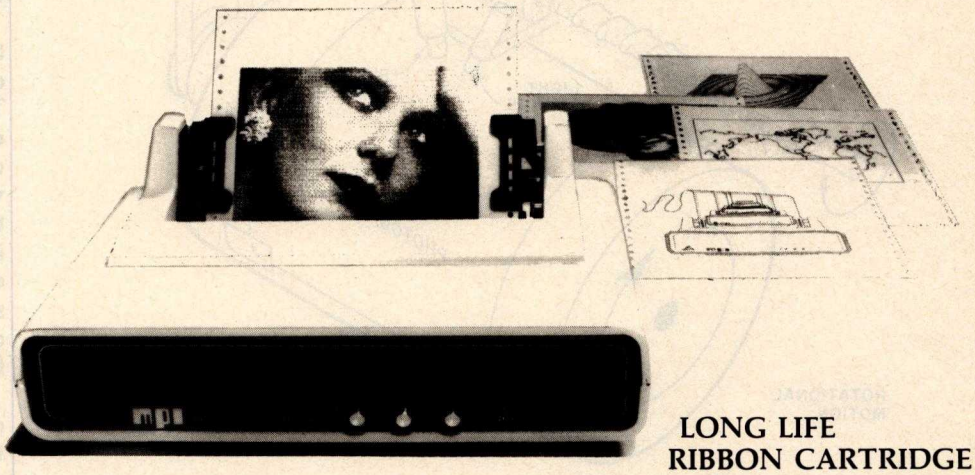

QUALITY


The attractive, durable 88G casework is formed from impact-resistant, flame-retardant Styron. Microprocessor controlled stepper motors provide precision control over print head and paper positioning. Computer quality tractors position paper for readability and are fully adjustable to accommodate varying paper widths.



MICROPROCESSOR CONTROLLED INTERFACE

The microprocessor array provides the intelligence for a dual RS232 serial and a Centronics® type parallel interface. Both inputs are fully buffered to allow the 88G to receive data and print simultaneously. A 1K character buffer is standard with a 2K buffer available as an option.

The short line thruput of the 88G has been increased by incorporation of a *Quick Cancel* feature that fully utilizes the bidirectional/unidirectional printing capabilities. Built-in diagnostic and self-test capabilities allow the user to easily pinpoint system problems and a *Power On* confidence test verifies operational status of the printer each time power is applied.

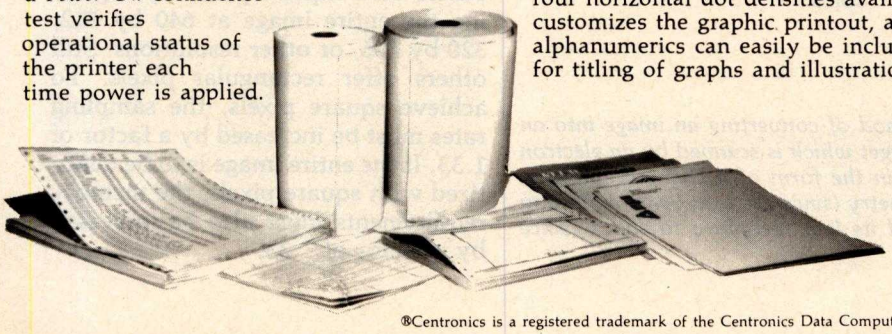

VERSATILITY

The 88G prints a full upper and lower case 96 character ASCII set with a crisp, clear 7x7 matrix in 80, 96, or 132 column formats. For text processing and correspondence applications, an 11x7, 80 column serif style matrix can be selected by switch or software command. The dual tractor/pressure-feed paper drive system allows the user to choose either pin-feed, roll, or single sheet papers up to 9.5 inches wide.

Complete forms control allows the 88G to be quickly configured for printing single or multiple-ply invoices, purchase orders, checks, or any type of preprinted form. Optional paper roll holders and single sheet feeders can be quickly attached.


The wide use range of the 88G makes it the perfect companion for business systems, data processing, RO teleprinter and terminal printer applications.

GRAPHICS

A high-resolution, dot-addressable graphics option can be added for applications requiring plotting, printing of screen graphics, drawings, illustrations, etc. Single dot print resolution greatly extends the usefulness of the graphics capability. Selection of one of the four horizontal dot densities available customizes the graphic printout, and alphanumerics can easily be included for titling of graphs and illustrations.


LONG LIFE RIBBON CARTRIDGE

Ribbon difficulties are minimized through use of a continuous loop cartridge with a five million character life. It is easily changed without opening the case, and without any complicated or messy threading operations.



PRICE

Every detail is directed toward providing a heavy-duty, commercial quality printer for only $749.00. No other printer on the market today can provide its quality, features and performance at a comparable price. The 88G is an obvious industry leader.

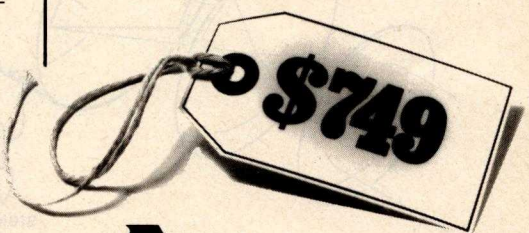

mpi

Micro Peripherals, Inc.
2099 West 2200 South
Salt Lake City, Utah 84119
Phone (801) 973-6053

®Centronics is a registered trademark of the Centronics Data Computer Corp.

Circle 138 on inquiry card.

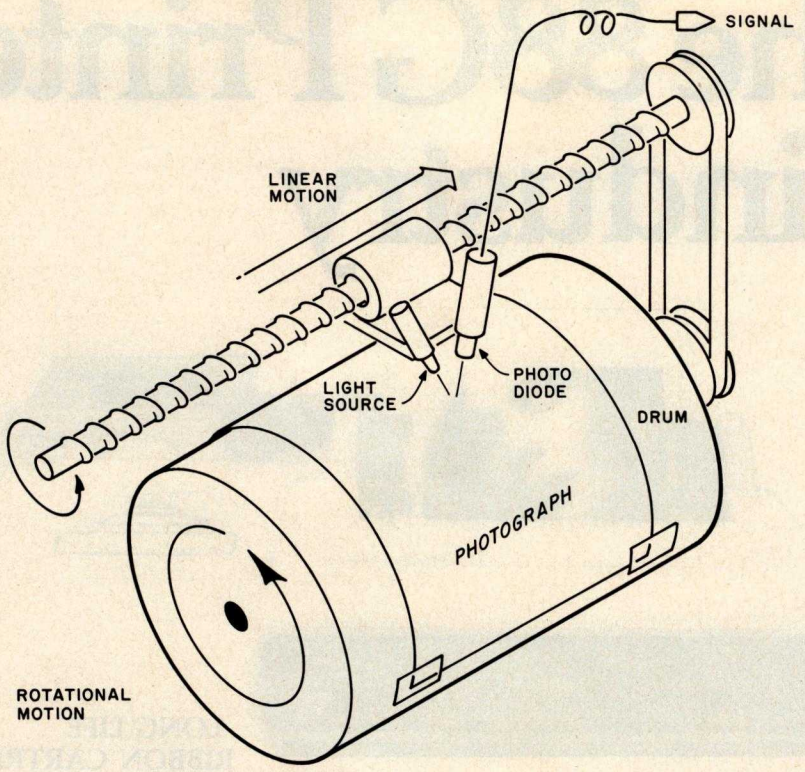


Figure 1: *A drum scanner produces high-quality results by moving the photograph relative to the sensor. Its drawbacks are that it requires precision mechanical construction, works very slowly, and the signal it produces is not video-compatible.*

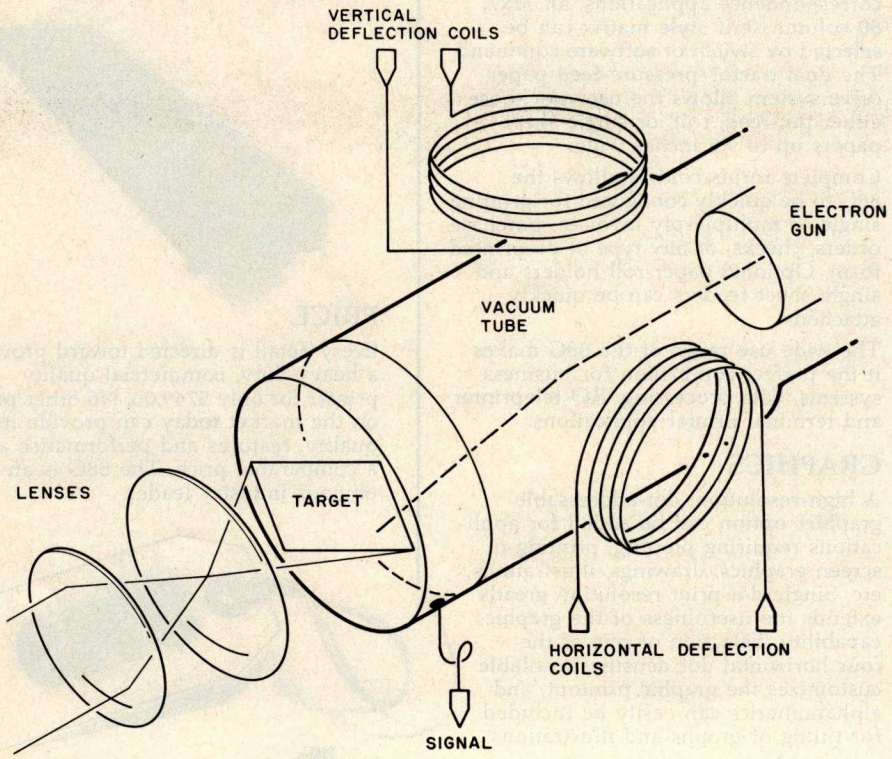


Figure 2: *A vidicon tube. This most popular method of converting an image into an electronic signal uses a photo-sensitive imaging target which is scanned by an electron beam. The resulting signal is the scanned image in the form of a changing voltage. Disadvantages of the vidicon are its unstable geometry (since electron-beam deflection is never completely repeatable and accurate) and its low resistance to shock (since vidicons are vacuum tubes).*


age as much as 20%. This error (also called *shading*) is still present in more expensive cameras where it's typically reduced to 10% or less. Fortunately, the shading effect changes slowly across the image target. Actual defects in the target are often found in inexpensive cameras, leading to black or white spots in the image.

It is possible to make some correction for the effects of shading and defects after the image is quantized. To do so, you first quantize an image of a solid-gray surface. The deviation of each point's value from the average value indicates the amount of correction that is necessary. By storing this image (or an image of corresponding correction values) the recorded target sensitivity can be used to improve the quality of another image quantized from the same television camera.

A television camera is to an image-capture system as an antenna is to a television set. No matter how much effort is spent on improving the system, the results are only as good as the input. Although the system can be made to compensate for some of the deviations in the camera, improvement of the video source is usually the choice for further investment once an image-capture system is in place.

A video image is normally generated in a 4:3 aspect ratio. This means that a properly operating camera produces it in a format that must be presented on a screen with three units of height and four units of width. Typical television sets are adjusted to approximately this ratio. If the video signal is quantized into a square array of square pixels, only a portion of each line should be quantized. (See figure 5.) Because there are approximately 512 lines of useful video image in a frame (approximately 256 lines in a field), it is often convenient to work with 512 or 256 squared resolutions. Some manufacturers of quantizers offer nearly square pixels by quantizing during 3/4 of the horizontal period, while others offer square pixels by digitizing the entire image at 640 by 512, 320 by 256, or other resolutions. Still others offer rectangular pixels. To achieve square pixels, the sampling rates must be increased by a factor of 1.33. If the entire image is to be quantized with square pixels, the memory requirements must also be increased by a factor of 1.33.

If you want a choice in print wheels, there's only one choice in printers.

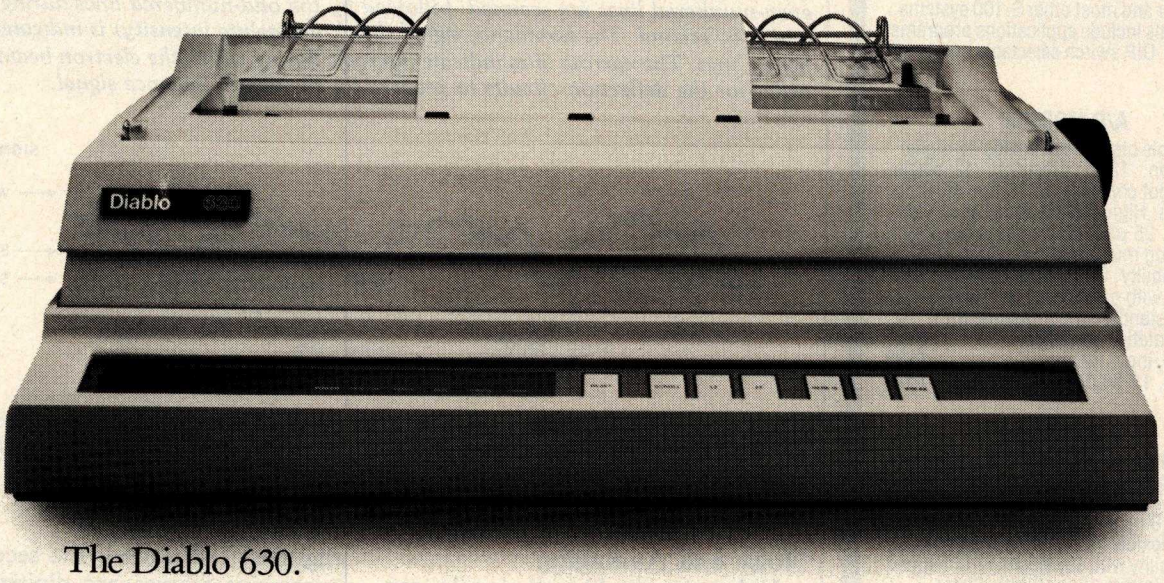


The Diablo 630.

It's the only printer that lets you use either metal or plastic print wheels. So you can choose the print wheel that's just right for the job.

The 630 works as well with a 96-character plastic daisy print wheel as it does with an 88-, 92-, or 96-character metal daisy print wheel. In over 100 different type styles.

Every 630 has fewer moving parts than competitive printers, which makes it more reliable. And it offers unsurpassed print quality. Compatibility with Diablo supplies. And bi-directional printing capability.



The 630 is the only printer in the world that uses both metal and plastic wheels.

So if you want to change your print wheels, you'll just have to change your printer.

To a Diablo 630 printer.

Diablo Systems

XEROX


Diablo® and XEROX® are trademarks of XEROX CORPORATION.

Circle 139 on inquiry card.

Circle 140 on inquiry card.

S-100 Monitor/Control Modules . . .

Order these heavy duty industrial quality boards—best overall specs in the industry, finest components and workmanship, IEEE standard for S-100 bus.



Guaranteed to operate with Cromemco, North Star and most other S-100 systems. All manuals include applications programs in BASIC. DIP switch selectable port base address.

A/D MODULE

Dependable high-speed analog-to-digital conversion. 12-bit precision. 32 single-ended input channels, or 16 true differential inputs. High-speed sample and hold amplifier. 25 µsec conversion time. Precision analog multiplexer. Vectored interrupt capability. Optional instrumentation amplifier with gain from 1 to 1,000.
AIM-12, standard input module with instrumentation amplifier $725
AIM-12B, input module only $635
AIM-11B, 11-bit precision module . $575

D/A MODULE

Four independent channels for digital-to-analog conversion. 12-bit precision over full 0° to 70°C range. Jumper selectable outputs. Binary or 2's complement digital inputs. Flexible bit-mapping jumpers allow compatibility with any existing I/O mapped software (either 12- or 8-bit). Super simple programming.
AOM-12, output module $495

REAL TIME CLOCK

Features new OKI CMOS clock chip for day, date, hours, minutes, and seconds. 12 or 24 hour time format. On-board battery backup. Full year operation without battery replacement. Read or write time directly from I/O port. Vectored interrupt capability.
CLK-24 ..... $250

ALSO AVAILABLE: Industrial control output current module, 4-20 mA – $395. Nonvolatile CMOS memory, 250 nsec, 4K bytes with battery backup – $395. 8K CMOS memory – $590. 16K CMOS memory – $990. Thermocouple compensation module – $350.

California; add 6% tax.
Money back guarantee. 10-day trial.
OEM and dealer inquiries invited.

DUAL

system reliability/system integrity
DUAL SYSTEMS CONTROL CORP.
1825 Eastshore Hwy., Dept. B
Berkeley, CA 94710 (415) 549-3854

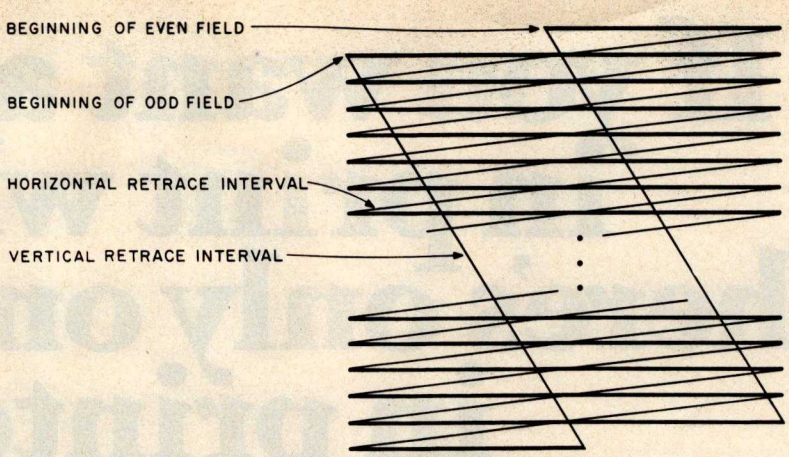


Figure 3: *Video lines are interlaced in a 2:1 ratio to reduce image flicker. Each frame of a video image (1/30 second) is made up of two fields. During the first 1/60 second the even-numbered lines are scanned, followed by the odd-numbered lines during the second 1/60 second. The luminance signal (black-and-white intensity) is indicated by the heavy lines. The narrow lines indicate intervals during which the electron beam is off in order for the deflection circuits to prepare for the next luminance signal.*

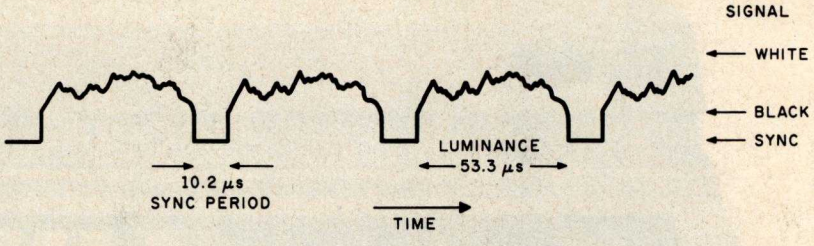


Figure 4: *Each line of a video signal is composed of a horizontal active-line period (53.3 µs), which contains the luminance information, and a sync period (10.2 µs), which contains reference levels and the horizontal sync period.*

Noise and Averaging


Video signals, like all signals, contain noise. It arises from several sources, primarily the circuits which amplify the sensor output. Very high quality video sources can have signal-to-noise ratios exceeding 45 dB. This is approximately equivalent to a noise of $\pm\frac{1}{2}$ the least-significant bit in a 7-bit quantization. However, many inexpensive home cameras, videotape, and off-the-air sources often exhibit signal-to-noise ratios worse than 25 dB or about $\pm\frac{1}{2}$ the least-significant bit in a 4-bit quantization. Why is it that such noisy video is still quite acceptable to a viewer? The noise is random; it changes every 1/30 second; and the eye averages out the noise. If you carefully view still video frames, such as on television sports events, the noise becomes apparent.

To improve the noise figure and the quality of the captured image, a number of frames can be pointwise averaged. Several frames are used to accomplish this: the first frame is digitized and stored; the second and successive frames are digitized; and each value is added to the corresponding stored value. The resulting array of numbers is divided by the number of frames used. Thus, the value for each point becomes the average of digitized values for that point across all the frames used, effectively cancelling out random noise. The improvement can be quite dramatic in situations where considerable noise is present. One can expect to achieve about $6.3 \times \log_2 N$ dB improvement for N frames up to a practical limit of about 45 dB. This maximum figure depends on the signal source, and the improvement depends on the randomness of the noise.

Sampling


The process of quantization consists of a sampling and a digitization phase. The sampling phase determines exactly when the signal value is to be frozen in time so the instantaneous value can be converted into a

CHRISLIN YEARS AHEAD IN MEMORY DESIGN

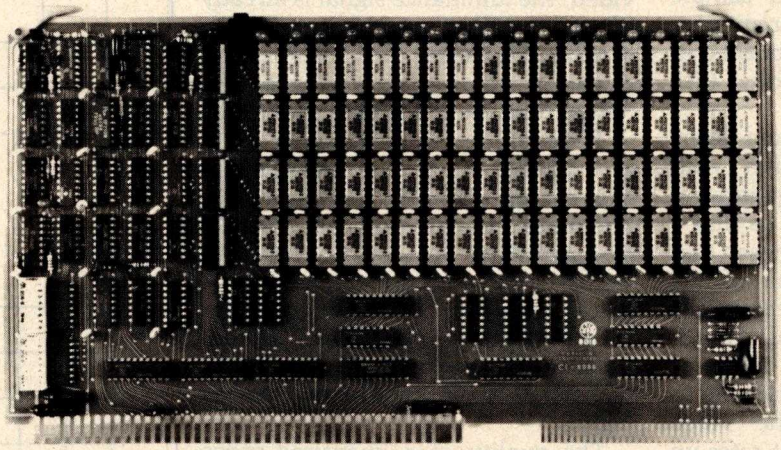


WE'VE DONE IT AGAIN — State of the Art Multibus® Memory Design. First to offer up to 512K on one board, and CHRISLIN again brings pricing sanity to the memory market. Why pay over $2000 for our competitor's 64K x 8 memory board when we will give you the CI-8086 128K x 9 memory for just $1500 or better yet, the CI-8086 512K x 9 memory module for $4700.


Up to 512K bytes in a single option slot. Available in 64K, 96K, 128K, 256K, or 512K configurations. On board parity generator checker, for both 8 bit or 16 bit systems. Off shelf deliveries.




CI-6800-2 — 16KB to 64KB. Plugs directly into Motorola's EXORciser I or II. Hidden refresh up to 1.5 Mhz. Cycle stealing at 2 Mhz. Addressable in 4K increments with respect to VXA or VUA. On board parity. **64K x 9 $995.00.**




CI-S100 — 16KB to 64KB. Transparent hidden refresh. No wait states at 4 Mhz. Compatible with Alpha Micro and all Major 8080, 8085 and Z80 Based S100 Systems. Expandable to 512K bytes thru Bank Selections. **64K x 8 $750.00.**





CI-8080 — 16KB to 64KB on a single board. Plugs directly into MDS 800 and SBC 80/10. Addressable in 4K increments up to 64K. **16KB $390.00. 64KB $750.00.**



CI-1103 — 16KB to 256KB on a single dual height board. Plugs directly into LSI 11/2, H11 or LSI 11/23. Addressable in 2K word increments up to 256KB. **8K x 16 $390.00. 32K x 16 $750.00. 128K x 18 $2880.00.**

CI-6800 — 16KB to 64KB on a single board. On board hidden refresh. Plugs directly into EXORciser I and compatible with Rockwell's System 65. Addressible in 4K increments up to 64K. **16K x 8 $390.00. 64K x 8 $750.00.**

Tested and burned in. Full year warranty.

DON'T ASK WHY WE CHARGE SO LITTLE, ASK WHY THEY CHARGE SO MUCH.

Chrislin Industries, Inc.

Computer Products Division

31352 Via Colinas • Westlake Village, CA 91362 • 213-991-2254

Multibus is a trademark of the Intel Corp. LSI II is a trademark of Digital Equipment Corp. EXORciser is a trademark of Motorola

Circle 141 on inquiry card.

number (ie: digitized). The sampling function is accomplished by periodically pulsing a sample circuit. The value of the video signal is then used to charge a capacitor that holds that value during the time needed by the digitizer until the next sample pulse. A sample-and-hold circuit provides the necessary components in hybrid or monolithic form. (See figure 6.)

The choice of sampling rate determines the spatial resolution with which the video signal is quantized. The sampling theorem tells us that a sample frequency must be chosen that is at least twice the value of the highest frequency component in the signal that we wish to record. Thus if we choose to sample at 10 MHz, or once every 100 ns, we will be able to record components of the video signal which are changing at rates up to 5 MHz. Sampling at this rate guarantees adequate data for all normal black-and-white video sources, since they contain very little energy beyond 4 MHz.

Examination of the sampling process shows that if there are frequency components in the signal above half of the sampling rate, false information (called *aliasing*) results. (See figure 7.) The aliasing component is effectively a beat frequency between the sampling frequency and the signal components above *half* the sampling frequency. In the case of standard video, the luminance signal is already filtered to roll-off in amplitude above 4 MHz. However, the chrominance signal in color video occupies the range from about 3 MHz to 4.5 MHz.

Therefore, you must either filter the signal to remove frequencies above about 3 MHz, derive a pure luminance signal from a properly designed video demodulator, or use a strictly luminance source, such as a black-and-white television camera. When digitizing at lower resolutions (and sampling at lower rates), the signal must be filtered accordingly.

The quality of a quantized video signal depends on accurate timing. If every element of the digital image is to be precisely aligned with the corresponding element in the video lines above and below it, the digitizer clock must be precisely synchronized with the television horizontal-sync signal. Also, the digitizer clock must not drift during the time between


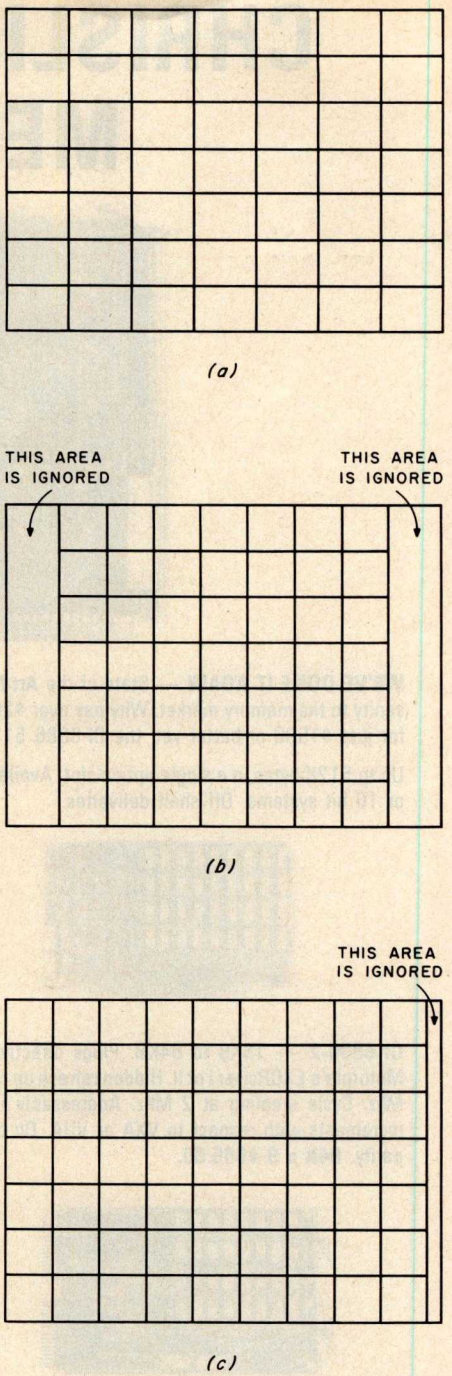


Figure 5: *The aspect ratio (width:height) of normal video is 4:3. The aspect ratio of each individual pixel is determined by the image-sampling rate.*
a: *This 7 by 7 square array of rectangular pixels is produced by sampling the same number of points per line as there are lines in a frame. For example, each line in an American-standard television frame (512 lines) would be scanned as 512 points.*
b: *By increasing the sampling rate by 1.33, square pixels result and a 7 by 7 array results from a square portion of the frame.*
c: *With the same increase in the sampling rate as in* **b**, *nearly the entire frame can be quantized into a 9 by 7 rectangular array of square pixels.*



PUT TIME AND BSR CONTROL IN YOUR APPLE II

THUNDERCLOCK PLUS™

AN INTERFACE FOR THE BSR X-10
- Control AC outlets with your BSR Command Console and APPLE II
- All 22 BSR commands at your program's fingertips
- Up to 128 separate dim/bright levels
- THUNDERWARE'S Scheduler software will control AC outlets in the background, while you run another program in the foreground


A REAL-TIME CLOCK/CALENDAR
- Provides month, date, day-of-week, hour, minute, and second
- Software selectable time formats: 24 hour or AM/PM ASCII string, or as numeric values
- Provides interrupts which can be enabled or disabled under software control
- On board battery allows accurate time-keeping for up to 2 years even with your APPLE turned off

BOTH FEATURES ON ONE CARD
- On-board firmware makes the THUNDERCLOCK PLUS™ exceptionally easy to use
- Read or set time, control interrupts, and send BSR commands with simple BASIC 'INPUT' and 'PRINT' statements
- Completely APPLE II compatible: INT and FP BASIC or PASCAL with Unit support
- At an affordable **introductory** price for both!

THUNDERCLOCK PLUS™.....$119.00
Clock, BSR interface, and User's manual

THUNDERWARE SCHEDULER.....$24.95
Diskette with Scheduler, examples, demos, and Scheduler manual

PASCAL SOFTWARE.....$19.95
Diskette with PASCAL Unit for clock and BSR interface



TO ORDER TOLL FREE (VISA/MC) CALL:
800-227-6204 Ext. 307 (Outside California)
800-632-2131 Ext. 307 (California Only)
California residents add 6% sales tax

OR WRITE FOR INFORMATION:
THUNDERWARE INCORPORATED
P.O. Box 13322, Oakland, CA 94661

BSR X-10 is a trademark of BSR (USA) LTD. APPLE II is a trademark of APPLE COMPUTER, INC

Circle 142 on inquiry card.

Elegance and power in a mathematical language.

APL

by Phelps Gates.



RAMWARE™

Software you can rely on.

Now, a high-level, scientific programming language that doesn't cost $200 or $300 for the home computer. This language is perfect for the mathematician, scientist, engineer, or anyone who just wants to learn a new language. The power of this language is in its strong mathematical operations, especially with regard to matrices and vectors. Programs requiring matrix multiplication or other matrix problem solving that would require hours of programming time in BASIC are solved quickly and with effort in APL. Not only is math made easy, but upon gaining proficiency in APL programming various string manipulations become child's play.

To aid in learning APL, lessons are included on the disk. Starting from the basics, you are brought step by step through the various programming techniques involved with APL. These lessons act as a tutor in a "learning by doing" atmosphere which will have you "talking APL" in no time. Also available is the book, **APL: An Interactive Approach,** which reinforces many of the examples given in the lessons. The book also provides additional insight into APL programming.

LIMITATIONS

Due to the absence of the special APL character set on the TRS—80, APL-80 uses shifted letters to represent the various APL characters. These shifted letters are identified on the screen by a graphics block before each shifted letter. If you have a modified TRS-80 (Electric Pencil Modification), a lower case driver is included to display the shifted letters on the screen.

In addition to the keyboard limitations, there are several other limitations. Lamination, domino, and matrix inverse are not implemented but can be derived with user-defined functions.

Multiple specifications must be split into two statements unless the left-hand assignment is to a quad. This also applies to implied multiple specifications.

Reduction and reshape (p) are not permitted for empty arguments; the argument of add/drop may not be scalar; empty indices are not permitted.

A quad (q) can't be typed in response to a quad (nor can the name of a function which itself gets input from a quad). Quote-quad (m) is permitted.

No more than 32 user functions can be defined in a single workspace and a function may not contain more than 255 lines.

A comment (c) must occupy a separate line: a comment can't follow a function statement on the same line.

In the tape version, arrays are limited to five (5) dimensions.

FEATURES

APL-80 on disk contains the following features:)SAVE and)LOAD workspace on disk;)COPY other workspaces into current ones; Return to DOS for directory or commands without losing your workspace; Send output to lineprinter; Five workspaces of lessons included; Sequential and random files; 15 digit precision; Monadic and dyadic transposition; Easy editing within FUNCTION lines; Latent expression (FUNCTION can "come up running" when loaded); Tracing of function execution; Real-time clock; User-control of random link; Workspace is 25587 bytes (in 48K machine); Arrays may have up to 63 dimensions.

COMMANDS I APL-80

APL-80 supports the following commands: Absolute value, add, and, assign, branch, catenate, ceiling, chr$/asc, circular, combinatorial, comment, compress, deal, decode, divide, drop, encode, equal, expand, exponential, factorial, floor, format, grade down, grade up, greater, greater/equal, index generator, indexing, index of, inner product, label, less, less/equal, logarithm, maximum, member, minimum, multiply, nand, negate, nor, not, not equal, or, outer product, peek, poke, quad, quote quad, random, ravel, reciprocal, reduction, reshape, residue, reverse, rotate, scan, shape, sign, system, subtract, take, transposition.

SPECIFICATIONS

Minimum system requirements: 32K disk system (48K recommended) Includes APL-80, Five workshapes of lessons, instruction manual.

Price: $39.95 on disk

Reduced feature: 16K Level II tape version, no lessons.

Transpositions, format, and inner product not implemented. Reduced domain for some functions. 6 digit accuracy.

Price: $14.95 on cassette

APL: An Interactive Approach

Price: $16.95 ($3.00 shipping charge)

The Software Exchange

TO ORDER TOLL-FREE

1-800-258-1790

(In NH call 673-5144)

Circle 144 on inquiry card.

SAVE MORE THAN 20%

NORTH STAR — INTERTUBE — MICROTEK
ZENITH — RCA-COSMAC — ITHACA
THINKER TOYS — GODBOUT — SUPERBRAIN

The smartest computers at the smartest price



FACTORY ASSEMBLED & TESTED	LIST	ONLY
HORIZON-1-32K-DOUBLE DEN	$2695	$1994
HORIZON-2-32K-DOUBLE DEN	3095	2299
HORIZON-2-32K-QUAD DENSITY	3595	2699
HORIZON-2-64K-QUAD+HARD DISK	9329	7199
HORIZON MEMORY ASSM	16K 389	32K 579
HORIZON MEMORY KIT	16K 359	32K 535
NORTH STAR HARD DISK 18 Mb	4999	3939
PASCAL FOR NORTH STAR ON DISK	199	190
Powerful NORTH STAR BASIC..The Best		FREE
2 NORTH STAR SOFTWARE DISKS w/HORIZON		FREE
NSSE 1-22 & PO1 TERRIFIC PROGRAMS	ONLY	10
NORTHWORD 299 MAILMAN 239	INFOMAN	369
RCA-COSMAC VP-111 99	RCA-COSMAC VP-711	189
COLOR! RAINBOW 385 CAT-100 1369	SPECTRUM	289
ITHACA FRONT PANEL COMPUTER 64K	3195	2695
Z-8001 CPU CARD 16-bit ITHACA S-100 8Mb		1179
ITHACA MEMORY 8/16-bit 64K	995	845
SEATTLE 8086 CPU 16 bit 10 x faster		556
SEATTLE MEMORY 8/16 BIT 16K 4Mhz		356
SSM KITS Z-80 CPU 221 VIDEO BRD VB3 4Mhz		412
MEASUREMENT MEMORY 64K A & T 4mHz		599
MEASUREMENT MEMORY 64K BANK SELECT		789
ECONORAM XIV UNKIT 16K	299	254
CENTRAL DATA 64K RAM	665	599
DISCUS/2D A & T + CP/M	1199	975
THINKER TOYS HARD DISK 26 Mb	4995	3995
DISCUS/2+2 1.2 Mbytes A & T	1549	1285
TARBELL DISK CONTROLLER DD	495	445
TARBELL CASETTE INTERFACE KIT	120	109
SUPERBRAIN	2995	2395
SUPERBRAIN QUAD DENSITY	3995	2995



ZENITH-HEATH Z-89 48K	2895	2495
INTERTUBE II SMART TERMINAL	995	725
ZENITH-HEATH SMART TERMINAL	995	739
ZENITH-HEATH WH-11 16bit COMPUTER		2995
CAT NOVATION MODEM	179	169
MICROTEK PRINTER	795	675
ANADEX PRINTER DP-8000	995	865
ANADEX PRINTER DP-9500-1	1650	1389
NEC PRINTER Fast Typewriter Quality	2915	2799
SECRETARY WORD PROCESSOR The Best!	85	77
TEXTWRITER III Book Writing Program	125	112
GOFAST NORTH STAR BASIC Speeder Upper	79	71
PDS SUPER Z-80 ASSEMBLER & More	99	89
SUPER BASIC DEBUGGER $89 COMPILER 135	HDS	40
EZ-80 MACHINE LANGUAGE TUTOR 25	STATISTICS	190
EZ-CODER Translates English to BASIC	79	71
ECOSOFT FULL ACCOUNTING PKG	350	315
BOX OF DISKETTES 29 IN PLASTIC CASE		30
Which Computers are BEST? BROCHURE		FREE
North Star Documentation refundable w/HRZ		20

ORDER 2 or more COMPUTERS....BIGGER DISCOUNTS
YES WE WILL BEAT OUR COMPETITION'S PRICE!
FACTORY ASSEMBLED & FACTORY WARRANTY

AMERICAN SQUARE COMPUTERS
KIVETT DR • JAMESTOWN NC 27282
(919)-889-4577



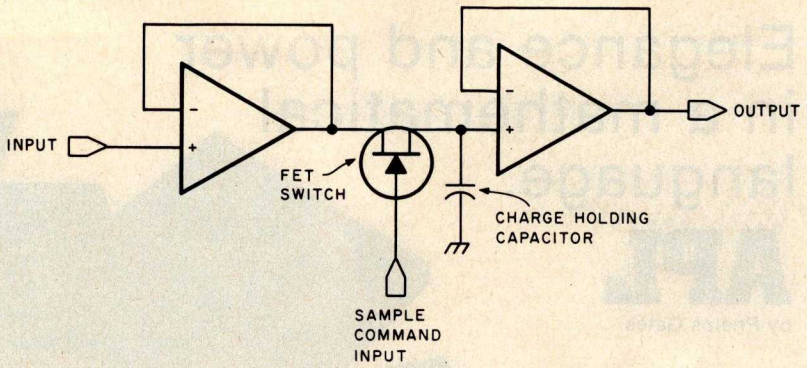


Figure 6: *An image is quantized in two phases: sampling and digitization. Sampling freezes the signal value so that it can be converted into a number (digitized). A sample-and-hold circuit such as shown here performs the sampling phase. Because of the low output impedance of the first operational amplifier, the capacitor is charged nearly instantaneously when the switch is operated by the video signal. The high input impedance of the second operational amplifier holds the capacitor at its full charge during the time the digitizer reads the signal.*



(a)

Figure 7a: *A correctly sampled video signal. Each dot indicates an instantaneous value read by the digitizer.*

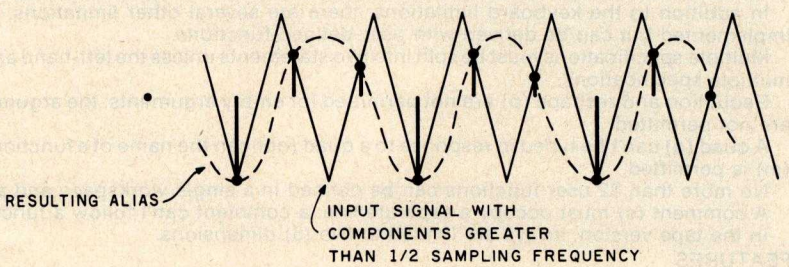

(b)


Figure 7b: *If high-frequency components are present in the video signal which are above one-half the sampling rate, false information (aliasing) results. Aliasing is a beat frequency between the sampling frequency and those signal components above one-half the sampling frequency. A low-pass filter is used to filter the frequency components and eliminate aliasing.*

horizontal-sync pulses. It is as much the attention to timing as to the high-speed technology that makes quality digitized video a reality.

Low-Speed Digitization

The digitizer, or A/D (analog-to-digital) converter, is commonly thought of as a device that takes on the order of 20 μs to 50 μs to determine an 8-bit or 12-bit value. Such converters are inexpensive and are adequate for sampling slowly changing signals, such as an audio signal. To digitize a video signal with such a converter, you can sample the signal no more often than about once per scan line. (See figure 8.) During the first frame, the first point of each line is digitized. During the second frame, the second point of each line is digitized, and so forth, until the entire image is digitized. If 512 samples per line are needed, 512 frames of video would be required to digitize every point. Thus, it would take about 17 seconds to complete the digitization of one frame. To do this the camera

The Empire has expanded!

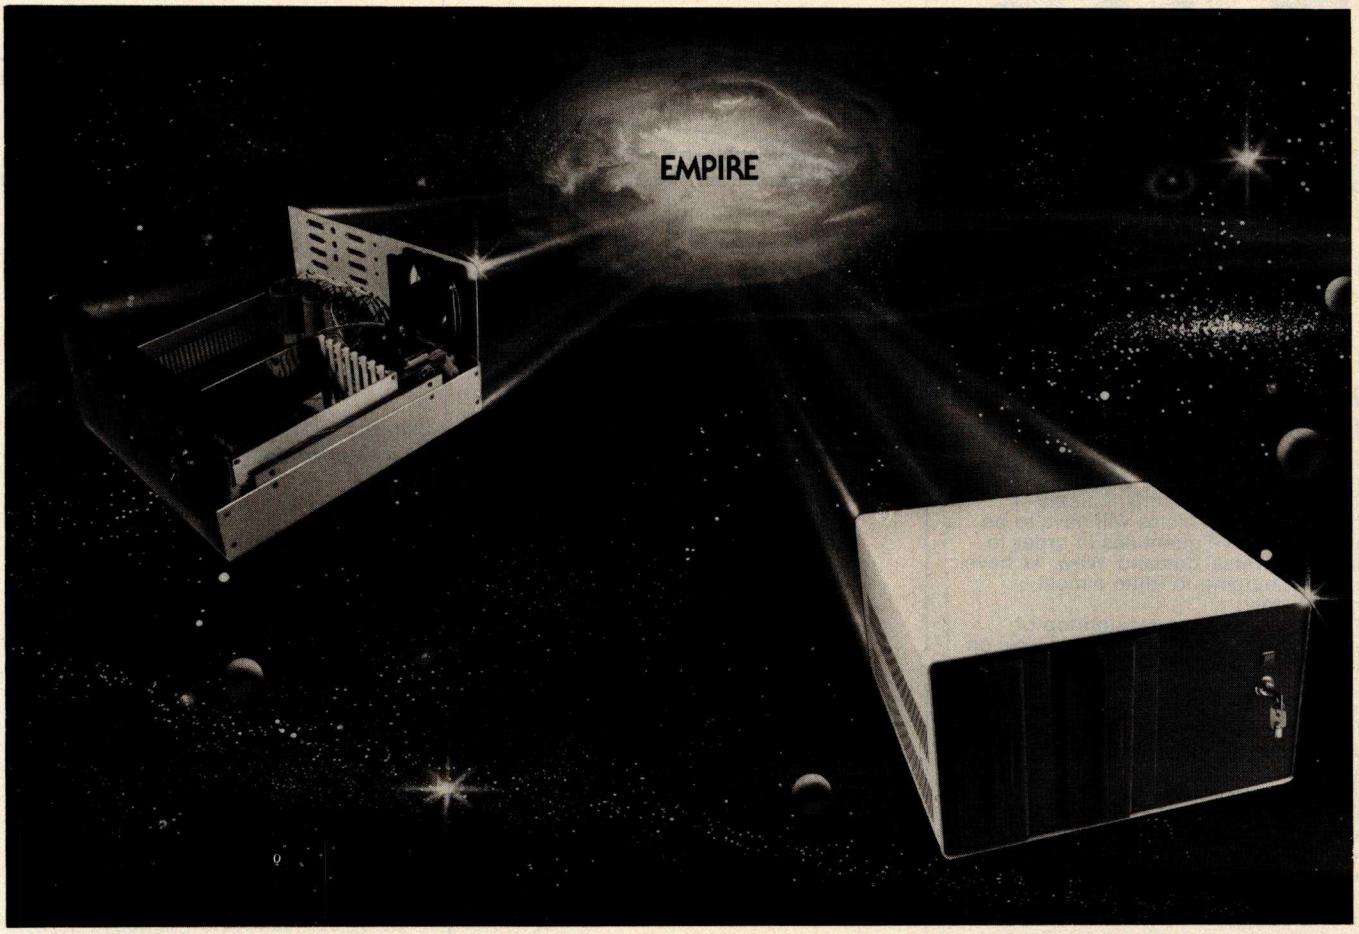


New Mainframe opens more areas for development

In one quantum leap Tarbell has expanded its popular Empire (the vertical disk subsystem) into a full line. This entire series now encompasses 5 variations. Each one contains different components so the S-100 system designer, hobbyist, or serious business user can arrive at the exact custom state he wants and needs.

The basic Empire still includes two Shugart or Siemens 8" disk drives; the compact cabinet with fan and power supply; a Tarbell floppy disk interface; CP/M*; Tarbell BASIC; the necessary cables, connectors and complete documentation. Naturally, it's fully assembled and Tarbell tested.

The new, top of the line Empire contains the basic model's components with the Tarbell design-approved Mainframe. Beside the 8-slot S-100 motherboard with an active terminated bus, there's a cardcage with card guides and a double-density interface.

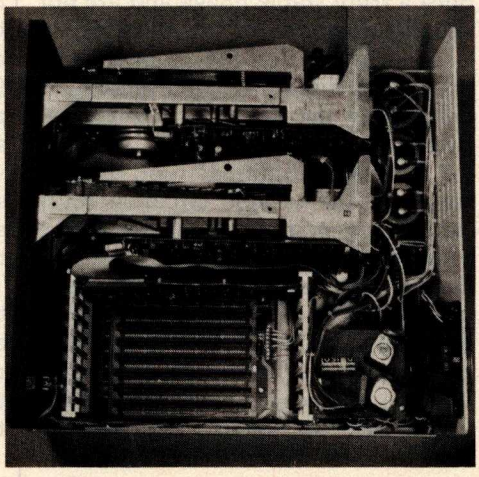

You're the master of your Empire
You can call the shots in the Empire. Tarbell's made sure of that by offering them as complete subsystem packages . . . or, as separate units. For example, the mainframe may be ordered with 1, 2 or no drives. Whichever way you go, however, you always get the reliability of Tarbell tested components and leadership-engineering.

To get control of your own Empire, see your quality computer store for quick delivery. Or, contact us for dealer locations or further information.

CP/M is a trademark of Digital Research.

Tarbell Electronics

950 Dovlen Place - Suite B
Carson, California, 90746
(213) 538-4251 / 538-2254

Circle 145 on inquiry card.



WHAT IF

our Elves, Reindeer and Rudolph are insufficient in the year 2001?
T/MAKER'S projections indicate interplanetary vehicles will have to be built in massive quantities in order to satisfy universal demand. Wow, we have to start shipping to Pluto almost immediately.
T/MAKER helps me stay on top of everything by giving me a total view on my CRT screen. We just input the latest census figures along with toy type requests and it goes to work really fast.
T/MAKER can take text and numerical data, integrate the data and print out hard copy reports for our work stations throughout the universe.
T/MAKER is a wonderful tool for data analysis. It is easy to set up calculations for rows and columns of tabular data, automatically perform the computations, review the results and then modify some of the data to see the impact on the over all results. Several days of manual work can be accomplished in minutes.
T/MAKER is a full screen editor for word processing which handles text up to 255 characters wide. It includes features like text formating and justification, text buffer for block moves and repeated inserts, global search and replace and commands for printing your letters, reports and document.
T/MAKER can perform an unlimited number of analysis and reporting tasks which integrate numerical and text processing. For example:
• Financial Statements • Balance Sheets • Statistics • Growth & Projections • Profitability Reports • Revenues & Expenditures • Portfolio Analysis • Price Lists • Rate Structures • Inventory Valuation. . . . . and much, much more.
T/MAKER requires a 48K CP/M system, a total of 240K bytes of disk storage, CBASIC-2, and a CRT computer terminal with cursor addressing and clear screen.
T/MAKER system is $275.00 complete with documentation and quick-reference card.
Documentation alone is $25.00.

LIFEBOAT ASSOCIATES
1651 Third Ave. NY, NY 10028
(212) 860-0300
International Telex 220501
T/MAKER is a trademark of P. Roizen
CP/M is a trademark of Digital Research



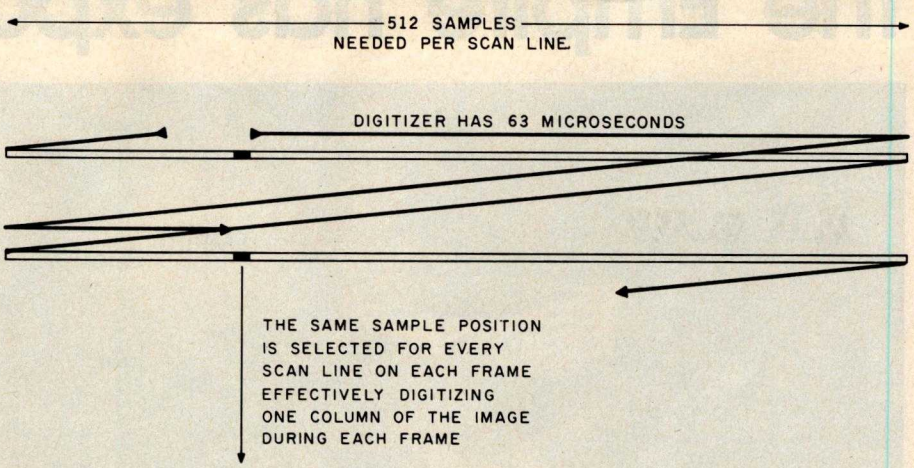


Figure 8: *By sampling a single point per scan line, the digitization of each pixel can be completed within 63 μs, and data is produced at a slow enough rate (15.7 k bytes/second) for transfer to mass storage.*

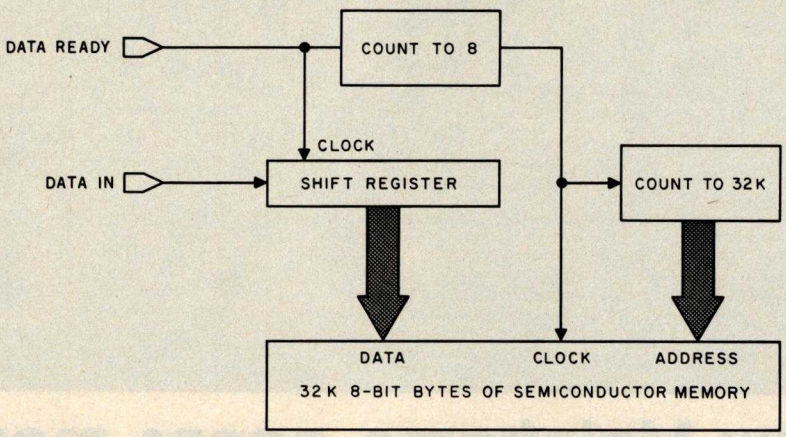


Figure 9: *Through the use of a shift register, standard programmable memory can be used to transfer a single-bit image at video rates. If a single bit is deposited into the shift register every 100 ns, an 8-bit value can be deposited into memory every 800 ns. The same process can be reversed for displaying the image.*

must be stationary on a tripod with respect to the object being viewed to keep the image stable. Tape players with freeze-frame options might seem attractive for this purpose. However, home videotape machines do not produce a truly stable image and are not usually adequate for this purpose.

The digitizer has plenty of time to produce a digital value. Precision is defined by the number of quantization levels, and more can be obtained for a small additional cost. Unfortunately, the sample circuitry must sample a very precise portion of the video signal, and its accuracy becomes more important if greater quantization levels are desired. Additionally, the decay rate of the sample circuitry becomes important because the sample must be held for up to 50 μs versus the 100 ns necessary for the high-speed digitization technique.

The advantages of slow digitization are the use of a relatively inexpensive A/D converter and low data rates, permitting direct storage of the data using floppy disks. The disadvantages are the need to hold the camera and scene stable for a length of time (depending on resolution) and the inability to capture other video sources, such as television programs and videotape. The requirements for the sampling phase are also more substantial than those for the high-speed method.

There is a hidden disadvantage of the low-speed method. The stored image cannot be readily viewed by reversing the process. The only way to reproduce the data in image form is to place a photographic camera in

Settle for More from Your TRS-80

BASIC Compiler. With TRS-80 BASIC Compiler, your Level II BASIC programs will run at record speeds! Compiled programs execute an average of 3-10 times faster than programs run under Level II. Make extensive use of integer operations, and get speeds 20-30 times faster than the interpreter.

Best of all, BASIC Compiler does it with BASIC, the language you already know. By compiling the same source code that your current BASIC interprets, BASIC Compiler adds speed with a minimum of effort.

And you get more BASIC features to program with, since features of Microsoft's Version 5.0 BASIC Interpreter are included in the package. Features like the WHILE . . .WEND statement, long variable names, variable length records, and the CALL statement make programming easier. An exclusive BASIC Compiler feature lets you call FORTRAN and machine language subroutines much more easily than in Level II.


Simply type in and debug your program as usual, using the BASIC interpreter. Then enter a command line telling the computer what to compile and what options to use.

Voila! Highly optimized, Z-80 machine code that your computer executes in a flash! Run it now or save it for later. Your compiled program can be saved on disk for direct execution every time.

Want to market your programs? Compiled versions are ideal for distribution.* You distribute only the object code, not the source, so your genius stays fully protected.

BASIC Compiler runs on your TRS-80 Model I with 48K and disk drive. The package includes BASIC Compiler, linking loader and BASIC library with complete documentation. $195.00.

*Microsoft royalty information for the sale of programs compiled with BASIC Compiler is available from Microsoft.

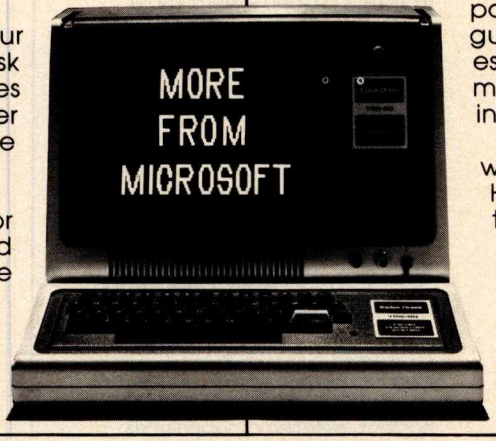

muMATH Symbolic Math System expands your TRS-80 beyond the limits of numerical evaluation to a much higher level of math sophistication.

Symbolic mathematics is muMATH's power. For the first time, algebra, trigonometry, calculus, integration, differentiation and more can be performed on a system smaller than an IBM 370. And in a fraction of the time you could do them manually.

Yet for all its power, muMATH is simple to use.

To perform a differentiation you could enter: ?DIF (A*X ↑ 3 + SIN(X ↑ 2),X);

In almost no time, the computer would reply with: @2*X*COS(X ↑ 2) + 3*A*X ↑ 2.

Or to add fractions: ?1/3 + 5/6 + 2/5 + 3/7;

The instantaneous answer: 419/210.

Or to perform a more difficult trigonometric expansion you enter: SIN(2*Y)*(4*COS(X)↑3—COS(3*X) + SIN (Y)*(COS(X+Y+#PI) — COS(X—Y));

Just a few seconds later, the computer replies: @4*SIN(Y)*COS(X)*COS(Y).

muMATH has virtually infinite precision with full accuracy up to 611 digits.

If you use math, you'll find countless ways to save time and effort with muMATH. It's a professional tool for engineers and scientists. A learning tool for students at any level from algebra to calculus.

And if you want to expand your capabilities even beyond the standard muMATH, the option is open. muSIMP, the programming language in which muMATH is written, is included in the muMATH package. A superset of the language LISP, muSIMP is designed especially for interactive symbolic mathematics and other artificial intelligence applications.

muMATH and muSIMP were written by The Soft Warehouse, Honolulu, Hawaii. Priced at $74.95, the package includes muMATH, muSIMP and a complete manual. It requires a Model I TRS-80 with 32K and single disk. muMATH for the Apple II Computer will be available later this year.

You can buy muMATH and BASIC Compiler at computer stores across the country that carry Microsoft products. If your local store doesn't have them, call us. 206-454-1315. Or write Microsoft Consumer Products, 400 108th Ave., NE, Suite 200, Bellevue, WA 98004.

MICROSOFT
CONSUMER PRODUCTS

Circle 146 on inquiry card.

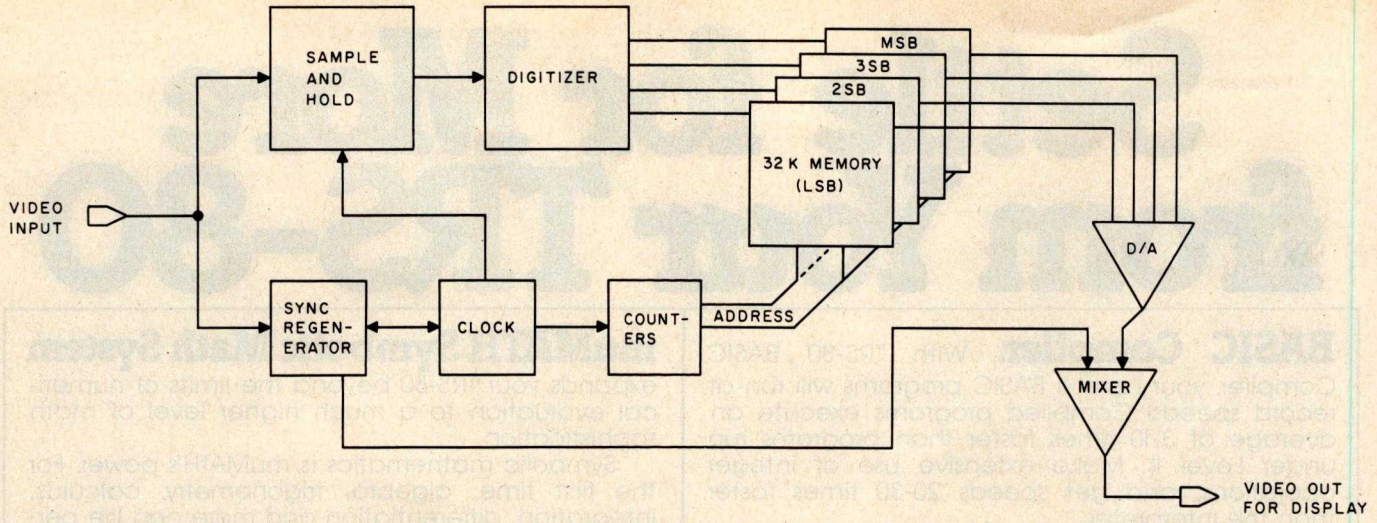


Figure 10: *Block diagram of an image-quantization system. In this example, a single memory board is used for each bit of quantization. Four boards would be needed for a 4-bit quantization.*

front of a television monitor and open the shutter for 17 seconds while the data are converted back into video, one point per line. Then, of course, the film must be processed: this is hardly conducive to interactive use.

High-Speed Digitization

If we want to digitize 512 points during each scan line, the converter must operate at very high speeds. The active portion of a video line is about 53 μs. Roughly, this means it must quantize the signal once every 100 ns. Such converters were available 10 years ago for about $2000, but today they can be built for less than $100! Next I'll examine the problems of storing the data produced at this rate.

Most home computers have central memory that can be cycled at about 250 ns to 1000 ns per 8-bit transfer. If the digitizer obtains one 4-bit quantity every 100 ns (at 512 samples per line with rectangular pixels), or 8 bits every 200 ns, standard computer memory cannot cope with the speed requirement. Most experimenters own configurations with 32 K bytes

SOFTWARE FOR THE HARDCORE

We know you hardcore bit hackers will recognize the computing power derived from combining the **FORTH** language with the 6809, today's most advanced 8 bit microprocessor.

And we know you'll understand this machine's 16 bit math, indirect addressing and two stacks are ideally suited for implementing **FORTH**.

But...should anyone need further convincing that **FORTH** provides a new dimension in power, speed and ease of operation, consider the following:

- It's a modern, modular, structured-programming high-level compiled language.
- It's a combined interpreter, compiler, and operating system.
- It permits assembler code level control of machine, runs near speed of assembler code, and uses less memory space than assembler code.
- It increases programmer productivity and reduces memory hardware requirements.
- It replaces subroutines by individual words and related groups of words called Vocabularies. These are quickly modified and tested by editing 1024-character text blocks, called screens, using built-in editor.

tFORTH is a basic system implemented for SS-50 buss 6809 systems with the TSC FLEX 9.0 disk operating system. It is available on 5¼" or 8" single density soft-sectored floppy disks. **$100.00**

tFORTH+ consists of tFORTH plus a complement of the following FORTH source code vocabularies: full assembler, cursor controlled screen editor, case statements, extended data types, general I/O drivers. **$250.00**

firmFORTH is an applications package for use with tFORTH. It provides for recompilation of the tFORTH nucleus, deletion of superfluous code and production of fully rommable code. **$350.00**

Call or write today.

Circle 147 on inquiry card.

Also available for 6800

KENYON MICROSYSTEMS

3350 Walnut Bend, Houston, Texas 77042 • (713) 978-6933


How much vigorous activity does your child get each day at school? If you don't know, find out.

To do better in the classroom now, to be fit and healthy later in life, children need at least one school period a day of physical education. But most schools are not providing this. And many schools require none at all.

Send for our free checklist and find out how your schools score. Then, do something about it.

Write Checklist, President's Council on Physical Fitness and Sports, Washington, D.C. 20201.

SUPERBRAIN® HARDWARE, SOFTWARE,

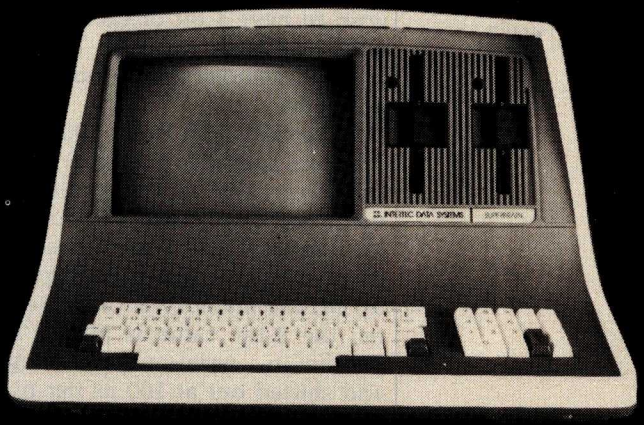

As the Western United States' largest distributor of SuperBrain® hardware and software,

WE WILL NOT BE UNDERSOLD BY ANY ADVERTISED PRICE!

Huge volume purchases for national and international marketing gives us the chance to get you rock bottom prices from the factory.

Our SuperBrain® prices are the lowest in the country, and our assistance in hardware and software information will be pleasant and helpful at all times.

SOFTWARE.

	CBasic	MBasic	
Accounts Receivable	X	X	$250.00
Accounts Payable	X	X	250.00
General Ledger	X	X	250.00
Payroll	X	X	250.00
Inventory	X	X	250.00
Restaurant Payroll	X		250.00
Job Costing	X		250.00
Mailing List	X	X	150.00
Word Processing	X		195.00
"Magic Wand"			325.00


PROGRAM LANGUAGES.

C Basic	125.00
M Basic	300.00
Fortran	450.00
Cobol	650.00

AND MORE.

Model 88T Impact Matrix Printer 595.00!

- Other Printers Available:
- T-I 810
- Anadex
- Diablo
- NEC
- Qume

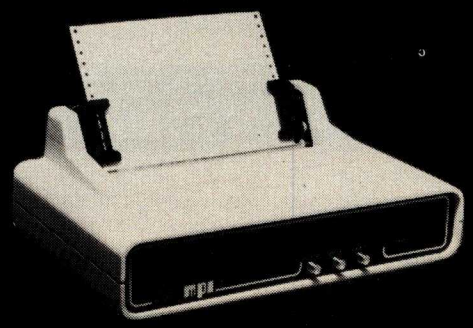

Dealer Inquiries Invited.

Circle 148 on inquiry card.

COMPUTER MARKETING CORPORATION

Computer Marketing Corporation
116 South Mission
Wenatchee, WA 98801
(509) 663-1626

or less of central memory. Although 32 K bytes would be barely sufficient for a 256 by 256 4-bit image, 128 K bytes are necessary for a 512 by 512 4-bit image. Therefore, memory is usually dedicated to the image-storage function and accessed by the computer through either a processor-controlled or DMA (direct-memory access) port.

The problem of providing large memories capable of 200 ns cycle times can be solved by the sequential nature of data transfers. By dividing memory into a number of parallel segments it's possible to use memories with 800 ns read/write-cycle times to simultaneously digitize, display, and communicate with the computer.

Proper memory organization allows ease of expansion, depending on whether higher spatial resolution or more bits per picture element are anticipated in the future. Also, good designs can be software-reconfigured to trade off spatial resolution for the number of bits per pixel. Methods for reconfiguration are left for the ambitious designers to discover on their own.

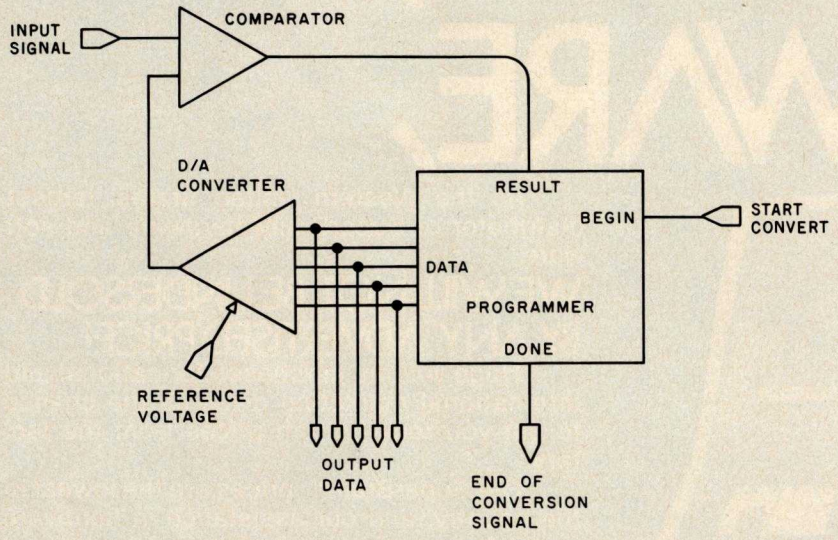


Figure 11: *The configuration of a conventional A/D converter.*

A Hypothetical Design

Assume that we'll require a 512 by 512 image with 4-bit quantization of each pixel. Memory is physically organized as four 32 K-byte memory boards. This is because there are 256 K points in the image, and we wish to have 1 bit of each 4-bit pixel value on each memory board. We will use memory which transfers 8-bit quantities.


If we shift 1 bit every 100 ns into a serial-in, parallel-out shift register, then every 800 ns the resulting 8-bit value can be deposited into memory. (See figure 9.) The same process can be reversed for real-time display. To do so, the memory is read every 800 ns, the 8-bit value is placed into a parallel-in, serial-out shift register, and shifted out at 100 ns per pixel.

80 COLUMN LOW COST IMPACT PRINTER

FEATURES INCLUDE:

- Uses Standard Typewriter Ribbon (Model 101B-80)
- Built-In Power Supply
- 5 x 7 Dot Matrix Character Generator or 10 x 7 or 10 x 14 Dot Matrix
- Standard 96 ASCII Character Font
- Upper and Lower Case Printing
- Up to 88 Characters Per Line
- Single Line Print Rate Is **110/160 CPS
- Average Print Rate Is **55/60 CPS For Ten Lines
- Graphics Capability With Extended Character Modes
- Programmable With 32 System Level Software Commands
- Standard Parallel and Serial Interface
- Reset Interface
- Baudrate Select From 110 to 9600
- Manual Paper Advance (Model 101B-80)
- Manual Selftest
- Adjustable Tractor Width From 1 to 9½ Inches (Model 101B-80)

***Model 101A-40 & 101B-80 Respectively*

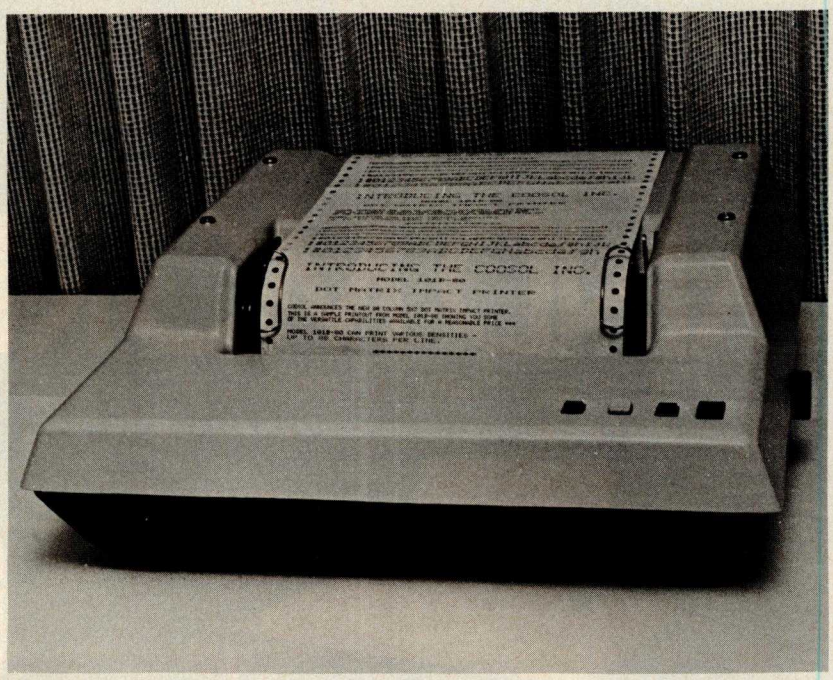

$495 Kit, 101B-80KE $545 Assembled & Tested 101B-80E


COOSOL, INC. P.O. BOX 743, ANAHEIM, CA 92805 (714) 545-2216 7 Days a Week

Circle 149 on inquiry card.


5,000,000 Reasons to replace your 5-inch Floppies with a low-cost, high-performance Hard-Disk.



5 megabytes instantly expand the program and data storage horizons on your H-89, TRS-80, or S-100 microcomputer system.



□Just slip 5 megabytes of on-line data storage into place in your standard 5-inch floppy disk openings, and suddenly your capability horizons have dramatically shifted. Upwards. Now your CP/M* S-100 microcomputer system, or H-89 Heathkit (HDOS or CPM 2.2) computer system can utilize the kind of high-reliability and rapid-access mass storage which today's sophisticated programming demands. □A company named ACT has created a complete package at a price so good, you couldn't walk away from it. The 5-inch package includes the remarkable Shugart Technology ST 506 hard-disk drive with 6.3 megabytes of unformatted mass storage and a micro-sequencing controller card with complete floppy disk-like interfacing. Hard-disks have never been more affordable. □If you are wondering just how these ultra-fast, high throughput hard-disk drives will work with your multi-terminal or real-time transaction oriented systems: now you can get some straight answers. Clip and mail the coupon for quick response to all your questions. Or better yet, give us a call today at (703) 471-6288 for some no-nonsense reasons why your system needs to ACT now. Quantity pricing is available to meet the needs of Original Equipment Manufacturers; check the box on the coupon.



act

American Computer and Telecommunications Corporation

Circle 150 on inquiry card.

Clip and mail coupon to:

11301 Sunset Hills Road
Suite A-4, Reston, VA 22090
(703) 471-6288

Tell me more about the ACT 5-inch hard-disk drive package:

My present 5-inch hard-disk drive interests center around:

- ☐ S-100 Microcomputer Systems
- ☐ H-89 Heathkit Computer Systems
- ☐ TRS-80 Radio Shack Computer Systems
- ☐ Send me quantity price schedule

Name _____

Title _____

Company _____

Address _____

City, State, Zip _____

Phone (_____) _____

*CP/M is a trademark of Digital Research.

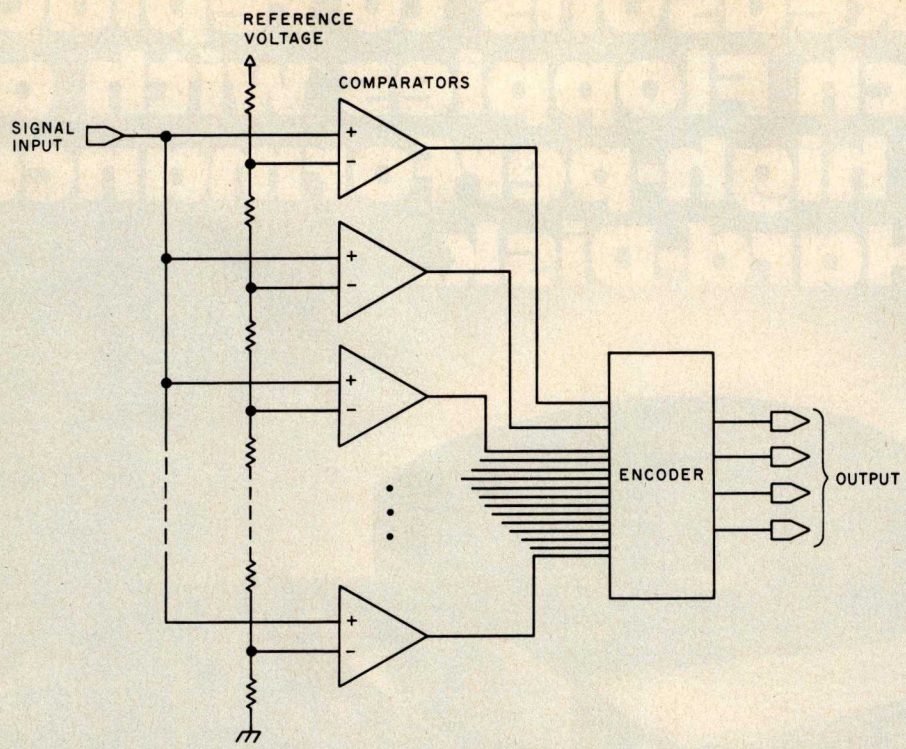


Figure 12: *The small number of bits required for image quantization makes flash (or parallel) A/D conversion practical. One comparator is used for each quantization level. For a 4-bit quantization, sixteen comparators would be needed. A reference voltage equal to full scale is fed to a voltage divider to form a set of comparator thresholds. The output of each comparator is then fed to the encoder, where the number of on comparators is converted into a binary output. Parallel converters are available in DIP form and allow for high data-conversion rates.*

HEATHKIT®

computer products and Zenith Data Systems get even better when you subscribe to Buss: The Independent Newsletter of Heath Co. Computers. Buss spreads the latest news of compatible hardware and software from many vendors. The newsletter is not affiliated with any of these and does not depend on income from ads. So Buss has to please only its subscribers—over 2900 of them.

Readers' candid reports of their discoveries save other subscribers headaches—and money. Innovations published in Buss have included hardware modifications and software fixes. And, since it is not a company-controlled publication, Buss can deal with both the weaknesses and strengths of Heath Co. Computer products.

Buss is a proven newsletter that keeps getting better—it's been published since April 1977. If you subscribe this month you'll receive a free directory of over 50 suppliers of hardware and software for Heathkit® computers and Zenith Data Systems. You have the choice of starting your Buss subscription with the latest issue or available back issues (about 14). All this information will be mailed first class (by air mail overseas). Full refund guaranteed if you're not satisfied. Payment must be in U.S. dollars payable on a U.S. bank or by Master Charge or Visa.

Issues:	12	18	24
U.S. & Canada	**$17.98**	**$24.75**	**$29.95**
Overseas	25.00	30.00	35.00

Buss, 325-B Pennsylvania Ave., S.E., Washington, DC 20003

To achieve the desired number of quantization bits per pixel, we stack the appropriate number of memory boards. (See figure 10.) In our case, four boards would be needed for 4-bit pixels. Of course, there would have to be an address bus common to all boards and an extra board to provide control and A/D conversion. The extra board would be needed to decode the video sync signals to keep memory-addressing in step with the video signal. Additionally, D/A (digital-to-analog) conversion and sync generation are necessary to drive a display monitor.

Notice that the memory is running at very slow speeds by modern standards. If we use memory that allows *two* operations per 800 ns, the computer can access or deposit data completely transparent to the digitization or display process.

Now consider high-speed A/D converters. Normal converters use a D/A converter, a programmer, and a comparator to derive a numerical quantity representing the voltage on the input. (See figure 11.) The programmer tries successive numbers, generating successive voltages out of the D/A converter. These voltages are compared with the analog input to determine if they are above or below the input voltage. The comparator output is used by the programmer to decide what number to try next until the process converges on a final value.

The fastest A/D programs take about as many tries as there are bits of quantity. Each try consumes as much time as the total of the programmer gate delay, the D/A-gate delay, the D/A-settling time, and the comparator-settling time. The fastest converters perform conversion on the order of the 100 ns per bit. This is obviously unacceptable for our purposes, since we consider 4 bits to be a minimum quantization and 100 ns to 200 ns to be a maximum conversion time.

The small number of bits that are required does make another conversion technique very practical. It has several names, the most popular being *flash* or *parallel* conversion. It consists of one comparator for each quantization level, or sixteen comparators for 4 bits. (See figure 12.) A reference voltage equal to full scale is fed to a voltage divider (ie: a network of resistors) to form a set of comparator thresholds, and the outputs

Circle 151 on inquiry card.

The COMPUTER FACTORY

TO ORDER CALL (212) 687-5000

SUPERBRAIN™



INTERTEC DATA SYSTEMS
64K ONLY
$2995
32K $2795

More than an intelligent terminal, the SuperBrain outperforms many other systems costing three to five times as much. Endowed with a hefty amount of available software (BASIC, FORTRAN, COBOL), the SuperBrain is ready to take on your toughest assignment. You name it! General Ledger, Accounts Receivable, Payroll, Inventory or Word Processing. . .the SuperBrain handles all of them with ease.

FEATURES INCLUDE:
• 2 dual-density minifloppies with **360K** bytes of disk storage • A CP/M Disk Operating System with a high-powered text editor, assembler and debugger.

Model QD
720K Bytes disk storage and 64K RAM
$3895

SUPER BRAIN HARD DISKS

10 Megabyte	16 Fixed-16 Removable
$3995	**$9995**

NEW 80 COLUMN



CBM Basic 4.0 Operating System

- 80 column by 25 line display
- 12" CRT
- New screen editor
- Split screen processing
- Super fast string handling
- 15 additional basic commands
- Supports relative record processing

Model 8016 16K memory **$1495** *AND* **Model 8032** 32K memory **$1795**

NEW 8050 DUAL DISK

1 million bytes on-line storage and **DOS 2.0** operating system

- Supports relative record (Random Access)
- Faster more reliable

only **$1695**

Commodore Computer

These low cost Commodore PET **Business Computers** have virtually unlimited business capabilities. Accounts Receivable, Inventory Records, Payroll, and other accounting functions.



PET 16N & 32N COMPUTERS
- Full size keyboard
- 16 or 32,000 Bytes Memory
- Level III Operating System
- Full Screen Editor
- Upper lower case & 64 graphic characters



PET DUAL FLOPPY DISK
- Stores 360,000 Bytes on-line
- Microprocessor controlled
- Uses single or dual sided floppies

HI-SPEED PRINTER
- 150 characters per second • Up to 4 copies 8" wide
- Microprocessor Controlled • Prints All Graphics • Full Formatting Capability

PERIPHERALS

• 24K Memory Expansion	$499
• 16K Memory Expansion	399
• PET to RS232 Serial	129
• 2 Way Serial Communication	229
• Modem Board for PET	375
• Analog to Digital Board for 16 Devices	275
• Second Cassette Drive	95

apple



NEW AMPEX HARD DISK
5 Fixed
5 Removable
Only $5995

APPLE II PLUS $1195

A complete self-contained computer system with APPLESOFT floating point BASIC in ROM, full ASCII keyboard in a light weight molded carrying case.

Features Include:
• auto-start ROM • Hi-Res graphics and 15 color video output.
• Expandable to 48K.

Supertalker	$279	Micromodem	$379
Disk	595	Superterm (24 x 80)	395
Add-on Disk	495	Speechlab	229
Pascal Card	495	Communication Card	225
Business Software	625	Modem	200
Monitor	159	Graphics Printer	595
Printer Card	180	Graphics Tablet	795

CENTRONICS 704



• 180 cps Bi-Directional • Up to 15" Paper Width • 9 x 9 Matrix
• Upper/Lower Case
• Tractor Feed
• RS-232 Serial Interface

$1895 List $2500

CENTRONICS 700-9

$1295 List $1895
• 60 cps • Up to 15" paper width
• Tractor Feed • Parallel Interface for Apple & TRS-80 • 2 channel vertical forms! • Top of Form!


CENTRONICS (Letter quality)

737 Serial $995
737 Parallel $965

CENTRONICS

730 Serial $775
730 Parallel $745

DIP-81 BIDIRECTIONAL 100 CPS MATRIX PRINTER



- Centronics interface
- Serial add $50
- Ribbon cartridge
- Up to 4 copies
- 80 column

$495


ANDERSON JACOBSON



841 I/O Terminal Ideal for word processing and small businesses.
- ASCII Code 15 CPS Printout High Quality Selectric Printing
- Reliable heavy duty mechanism
- Completely Refurbished by A.J.
- Delivered FREE to nearest service center


Parallel $1130
Serial $1230

apple /// IS FINALLY HERE 128K RAM!!

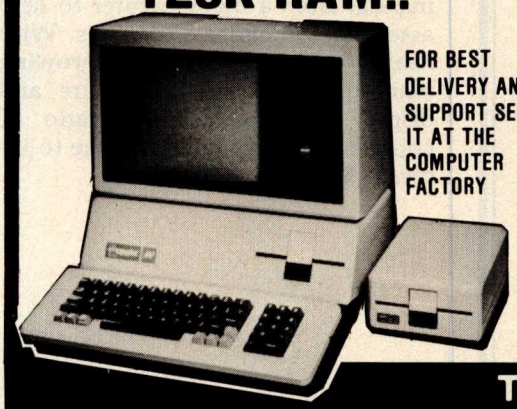

FOR BEST DELIVERY AND SUPPORT SEE IT AT THE COMPUTER FACTORY


XEROX 1730



Letter Quality Printer
List $2755 **Special $2495**
90 Day On Site Warranty

- 40 Cps
- Uses all 100 metal & plastic daisy wheels
- Automatic bidirectional printing
- Fewer moving parts

XYMEC HQ 1000



with 10, 12, 15 Pitch & Proportional Spacing
- Z-80 controlled
- Up to 198 columns

$2495

VISA · WE HONOR master charge

Min. Credit Card Order $75

N Y residents add 8% sales tax
• Same day shipment on prepaid and credit card orders

TO ORDER CALL (212) 687-5000 Open Mon-Fri. 10-6 Sat. 11-5

The COMPUTER FACTORY 485 Lexington Ave., New York, NY 10017 (46th St. Lobby)

Foreign order desk — Telex 640055

The Nature of Video Images

The video standard has three primary components, synchronization signals, a luminance (black-and-white) signal, and a chrominance (color) signal. The synchronization (sync) signals tell the receiver when to begin a new frame and a new line. The luminance signal provides intensity values that comprise a picture. The signals are effectively separate, allowing compatibility between color and black-and-white television receivers. Our primary interest here is the luminance signal, but the chrominance signal must still be considered. It must be filtered out of a color video signal before quantization. (The reason for this requirement has been described in the section on sampling.)

Each complete picture, called a frame, *takes 1/30 second to complete. To reduce flicker, 2:1 interlacing is used. During the first 1/60 second, the even-numbered lines are displayed; and during the second 1/60 second, the odd-numbered lines are displayed. Each set of lines (half of the frame) is called a* field. *(See figure 3.)*

Each field consists of 262.5 lines, each line transmitted in 63.5 μs. Nine of these lines are used for the vertical synchronization pulse, which is actually a series of pulses that are easy for receiver circuits to recognize. Each line is composed of a horizontal active-line period during which luminance information is present, and a sync period when reference levels and the horizontal sync signal are present. The horizontal active period is 53.3 μs, and the sync period is 10.2 μs. (See figure 4.)

of the comparators are fed to an encoder. The analog voltage determines which comparators are on, and the encoder then turns the number of on comparators into the corresponding binary number. The only delays are the settling time of one comparator and the encoder-logic delay. I've built three of these for under $100. They are also commercially available in DIP (dual-in-line package) form in 3-bit or 4-bit designs that allow for cascading to achieve 1 or 2 additional bits.

Summary

Inexpensive semiconductor memory and other technological developments have made digital image storage with real-time video input and output a practical reality for the home computer experimenter. Several complete hardware and software systems are available for the display and digitization of real-time video. At least one company offers an inexpensive, real-time digitizer and display, while several offer very inexpensive digitizers to accomplish low-speed digitization. A high-speed system costs $1500 to $5000 or more, depending on options. The primary price difference is due to the amount of image memory desired. Low-speed systems range from about $350 to $4000.

Flash-conversion products range from $30 to $90 for 3-bit and 4-bit units with about 30 MHz maximum rate. These save you the headaches of finding matched resistor values for homebrew flash converters.

Although there isn't enough information in this brief article to construct an image-capture system, there should be enough to familiarize an ambitious designer with the techniques and problems. You would be well advised to obtain a technical manual from a manufacturer to help assess the potential difficulties. With healthy competition in the growing marketplace for image-capture and display, the power/price ratio of complete systems will continue to increase. ■

Attention TRS–80 Mod II owners: P&T CP/M® 2 has more to offer!

More Disk Storage 596K bytes with double density on standard single sided disk drives. If that's not enough, versions are available for double sided expansion drives (1.2M bytes per disk) and the Cameo Hard disk system (10M bytes).

More CRT Functions P&T CP/M 2 has the most advanced screen driver available for the Mod II including: erase to end of line/screen, insert/delete line, cursor addressing, non-scrolling area on screen, and much more.

More Serial I/O Capabilities The serial drivers in P&T CP/M 2 support ETX/ACK, XON/XOFF, and request to send handshaking. Direct control of the serial ports is also available for special applications.

More Documentation We provide the standard CP/M manuals and our own 150 page manual written specifically for P&T CP/M 2.

More Utilities We have added 14 of our own utility programs for the Mod II to the standard CP/M utilities.

More Useful System Functions P&T CP/M 2 has all sorts of useful features you won't find elsewhere: type-ahead buffer for keyboard input, system time of day clock, automatic program execution, and lots more.

Prices

Standard P&T CP/M 2	$185
P&T CP/M 2 for Shugart 850 2 sided drives	$220
P&T CP/M 2 for Cameo Hard Disk system	$250

We also carry these other software packages:

Magic Wand text processor	$350
VEDIT text editor	$110
LYNC data communication program	$95
MCALL intelligent terminal program	$65
MAC macro assembler	$90
Pascal/M	$175
Microsoft Basic-80 Interpreter	$325
Microsoft Basic-80 Compiler	$350
CBASIC2 (improved performance)	$105
Osborn accounting software (requires CBASIC 2; manuals extra) each package $95; all four $295	

Also available are single and double sided expansion disk drives and the Cameo Hard Disk System. Call or write for details.


Prepaid. COD. Mastercharge or Visa orders accepted.
Shipping extra. California residents add 6% sales tax.

PICKLES & TROUT
P.O. BOX 1206, GOLETA, CA 93017. (805) 967-9563


CP/M is a trademark of Digital Research Inc. TRS-80 is a trademark of Tandy Corp.

Circle 152 on inquiry card.


Exciting, entertaining software for the Apple II and Apple II Plus*

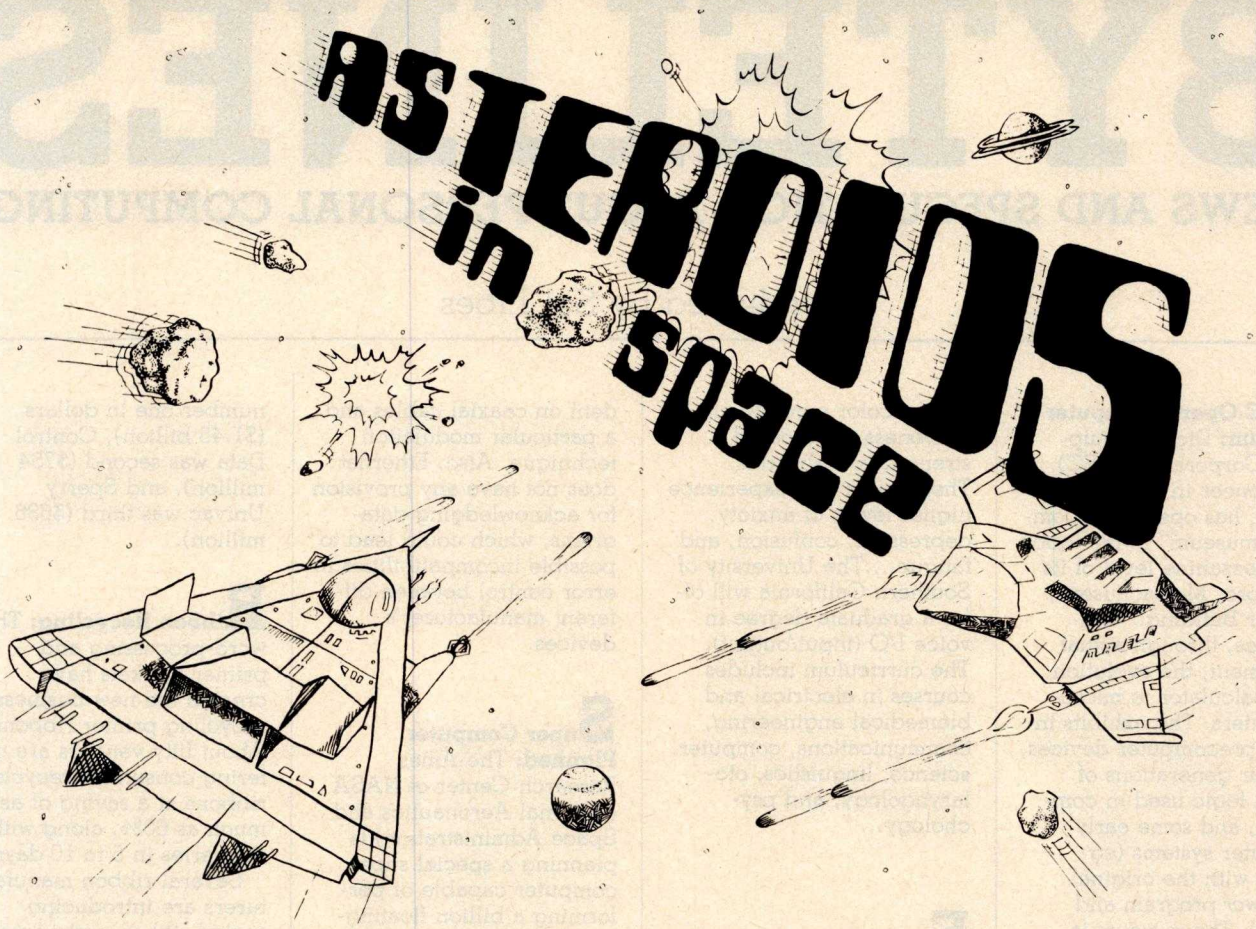

If you liked "Invaders", you'll love ASTEROIDS IN SPACE by Bruce Wallace. Your space ship is traveling in the middle of a shower of asteroids. Blast the asteroids with lasers, but beware — big asteroids fragment into small asteroids! The Apple game paddles allow you to rotate your space ship, fire its laser gun, and give it thrust to propel it through endless space. From time to time you will encounter an alien space ship whose mission is to destroy you, so you'd better destroy it first! High resolution graphics and sound effects add to the arcade-like excitement that this program generates. Runs on any Apple II with at least 32K and one disk drive.
On diskette — **$19.95**



FRACAS™ by Stuart Smith. A fantastic adventure game like no other — up to eight players can participate in FRACAS at the same time. Journey in the land of FAROPH, searching for hidden treasure while warding off all sorts of unfriendly and dangerous creatures like the Ten Foot Spider and the Headless Horseman. You and your friends can compete with each other or you can join forces and gang up on the monsters. Your location is presented graphically and sound effects enliven the battles. Save your adventure on diskette or cassette and continue it at some other time. Requires at least 32K of RAM. Cassette: **$19.95** Diskette: **$24.95**



BATTLESHIP COMMANDER™ by Erik Kilk and Matthew Jew. A game of strategy. You and the computer each start out by positioning five ships of different sizes on a ten by ten grid. Then the shooting starts. Place your volleys skillfully — a combination of logic and luck are required to beat the computer. Cartoons show the ships sinking and announce the winner. Sound effects and flashing lights also add to the enjoyment of the game. Requires at least 32K of RAM.
Cassette: **$14.95** Diskette: **$19.95**



FASTGAMMON™ by Bob Christiansen. Sound, hi res color, and cartoons have helped maked this the most popular backgammon-playing game for the Apple II. But don't let these entertaining features fool you — FASTGAMMON plays serious backgammon. Requires at least 24K of RAM.
Cassette: **$19.95** Diskette: **$24.95**

QUALITY SOFTWARE

6660 Reseda Blvd., Suite 105, Reseda, CA 91335

WHERE TO GET IT: Call us at (213) 344-6599 for the name of the Quality Software dealer nearest you. If necessary, you may order directly from us. MasterCharge and Visa cardholders may place orders by telephone and we will deduct $1 from orders over $19 to compensate for phone charges. Or mail your order to the address above. California residents add 6% sales tax. SHIPPING CHARGES: Within North America orders must include $1.50 for first class shipping and handling. Outside North America the charge for airmail shipping and handling is $5.00 — payable in U.S. currency.

*"Apple II" and "Apple II Plus" are trademarks of Apple Computer, Inc.

BYTELINES

NEWS AND SPECULATION ABOUT PERSONAL COMPUTING

Conducted by Sol Libes

DEC Opens Computer Museum: Digital Equipment Corporation (DEC), the pioneer in minicomputers, has opened a "computer museum" in the lobby and mezzanine level of its Marlboro, Massachusetts, "Tower Building." It illustrates, through actual equipment, the evolution from calculator to microcomputers. The exhibits include precomputer devices, the four generations of digital logic used in computers, and some early computer systems (eg: PDP-1 with the original *Spacewar* program and others). The museum is open to the public.

Random News Bits: Casio, Inc, the Japanese electronics manufacturer, has introduced a personal computer in the US. The FX-9000P can store programs directly in 4 K-byte CMOS (complementary metal-oxide semiconductor) memory cartridges (with lithium batteries) that can be removed from the unit. The basic unit is priced under $900.... Pascal can now be considered as having "made it." IBM has announced that Pascal will be available for IBM systems using OS/VS and VM/CMS operating systems. IBM will charge $235 a month for it. To think that most microcomputer users pay less than IBM's monthly charge to buy Pascal outright.... A study conducted by the National Institute for Occupational Safety and Health found that video-terminal users suffer problems of eye strain, blurred vision, color perception, numbness, and loss of strength in their arms. These users also experience higher levels of anxiety, depression, confusion, and fatigue....The University of Southern California will offer a graduate degree in voice I/O (input/output). The curriculum includes courses in electrical and biomedical engineering, communications, computer science, linguistics, oto-laryngology, and psychology...

Fujitsu Overtakes IBM In Japan: For the past thirty years, IBM has dominated data processing over the entire globe. Now, however, it is reported that in Japan Fujitsu, Ltd, has overtaken IBM in sales. Fujitsu and several other Japanese computer suppliers are now preparing a massive onslaught into the US and European markets.

IEEE Local Network Standard Moves Ahead: The IEEE Local Network Standards Committee expects to have a draft of its standard by year's end. At this time, it appears that the Ethernet system, proposed by Xerox, Digital Equipment Corporation, and Intel, will *not* be adopted as the standard. The reasons for this are that Ethernet is still in a preliminary-definition state with many areas not precisely defined. Further, Ethernet is highly dependent on coaxial cables and a particular modulation technique. Also, Ethernet does not have any provision for acknowledging datagrams, which could lead to possible incompatibilities in error control between different manufacturer's devices.

Super Computer Planned: The Ames Research Center of NASA (National Aeronautics and Space Administration) is planning a special super computer capable of performing a billion floating-point operations per second. The computer will be designed to simulate a wind tunnel. It is expected to have 40 M words of directly addressable memory plus 200 M words of block-addressable memory. NASA wants the system operational in 1986.

US Government Shifting To Smaller Computers: The US government now has a reported 15,000 computers in operation, worth more than $5.4 billion. The trend is shifting from large, costly mainframes to smaller units. In fact, now at least two-thirds of the machines cost less than $50,000.

The GSA (General Services Administration) recently disclosed that at the end of 1979 the three leading computer suppliers were Digital Equipment Corporation (3656 units), Sperry Univac (1778 units), and IBM (1284 units). However, IBM still ranked number one in dollars ($1.45 billion), Control Data was second ($754 million), and Sperry Univac was third ($686 million).

Ribbon Recycling: The word-processing and printer markets have created the new business of recycling printer ribbons. About fifty vendors are offering consumers recycled ribbons at a saving of as much as 60%, along with deliveries in 5 to 10 days.

Several ribbon manufacturers are introducing sealed ribbon cartridges to prevent recycling. They claim that sealing improves ribbon reliability.

Microsoft Signs UNIX Agreement: Microsoft, of Bellevue, Washington, has signed an agreement with Western Electric for the rights to develop and market versions of UNIX, an operating system originated by Bell Laboratories. The Microsoft versions will be specifically designed for 16-bit microprocessors, such as the Intel 8086, Zilog Z8000, and Motorola 68000. The Microsoft version will be called XENIX. UNIX seems to be the most popular minicomputer timesharing operating system in current use. It is very popular in the educational community, probably because Western Electric sold it to educational institutions for a very low fee. However, due to its sophisticated features, UNIX has been gaining in popularity in the profes-

SOFTWARE
SOFTWARE
DIGITAL MARKETING
DIGITAL MARKETING™

DIGITAL MARKETING • 2670 CHERRY LANE • WALNUT CREEK • CALIFORNIA 94596 • (415) 938-2880

REPORT WRITER™

Mini-word and arithmetic calculation processor designed to generate reports with ledger of figures and numeric calculations. Built-in calculator functions end calculator to paper errors. Saves data. Reports can be printed as often as desired. Changes in data can be easily entered and saved. "Cause and Effect" analysis easily computed using Recalculate function.

Typical applications are:

- ★ Appreciation Schedules
- ★ Capitol Expenditure Proposals
- ★ Profit/Loss Projections
- ★ Balance Sheet Projections
- ★ Budget Analysis
- ★ Job & Labor Analysis

$150. Manual alone $25.

Requires 48K RAM & Microsoft Basic Formats: 8″ single density, NorthStar 2D & Micropolis Mod II

PASCAL/M™

CP/M™ compatible language for 8″ 8080/Z80 CPU's, NorthStar 2D, Cromemco CDOS & Superbrain.

- ★ Random access files
- ★ Run-time debug support
- ★ Over 45 extensions to Standard Pascal
- ★ Requires 54K RAM

$175. Manual alone - $10.

ACT™

CP/M compatible macro assembler for Z80, 8080/85, 6502 & 6800.

One assembler that supports all major 8 bit micros and runs under CP/M. Formats: 8″ single density, NorthStar, & Superbrain. Requires 24K RAM.

$125. Manual alone - $15.

ACT II - CP/M 2.x compatible cross assembler for 8086/8088.

$175. Manual alone - $15.
ACT I and ACT II purchased together - $225.

COPYWRITER™

A powerful CP/M Word Processing System which includes fast screen editor and is exceptionally easy to learn and u
Copywriter supports both vertical and horizontal scrolling 132 column printers. File size is limited only by disk size. print formating program allows control over output word cessing files, and permits the insertion of variable data in form letters. Full proportional printing is also supported.

COPYWRITER+ includes an integrated mailing list system which can:
select any range of zip codes for printing
select which fields to fill into merge
select by title, position or department within a company
Output can sort for bulk mailings by state and zip code.

COPYWRITER - $395.
COPYWRITER+ - $595. Manual alone $35.
Requires 56K RAM. 8″ single density IBM format

DATEBOOK™

NEW! for NorthStar, Micropolis, TRS-80 Mod II & any other CP/M based operating system.

End paging through an appointment book forever! Easy to learn & use.

- ★ Replaces your office appointment book
- ★ Searches for openings that fit time of day, day of week & day of year constraints
- ★ Appointments made, modified or cancelled by a few key strokes
- ★ Copies of day's appointments can be quickly printed
- ★ Schedule appointments 4 months in advance - plus

$295. Manual alone - $25.

S-BASIC™

Produces chainable, relocatable native code.

- ★ Fully defined user functions & procedures
- ★ Local & global variables
- ★ Single & double precision floating point
- ★ Fixed point packed BCD
- ★ Integer, string & character data types
- ★ Packed binary disk storage

Requires 40K RAM. Format 8″ single density, NorthStar 2D & Micropolis Mod II.

SPECIAL INTRODUCTORY PRICE! $250.

$295. January 1, 1981

PAYSOFT™

Easy to use, yet powerful and flexible payroll program for 8″ single density, NorthStar 2D & TRS-80.

- ★ Simplified data base construction.
- ★ Minimum system operation time
- ★ Enter hours worked - gross & net pay calculated
- ★ Federal, State, FICA, SDI witholdings are automatic

Requires 48K RAM

$195.

FILETRAN™

The TRSDOS to CP/M and CP/M to TRSDOS file translation system. FILETRAN transfers files by file name from one disk to another. May also be used to search any program for all occurences of a string. Can be used to generate a variable cross reference. Helps to convert Level II BASIC programs to Microsoft Basic. Formats: 8″ single density, NorthStar 2D & TRS-80.

$149.

PEARL™

The application software generator for 8″ single density, NorthStar 2D, Micropolis Mod II & Superbrain.
Pearl asks questions that a programmer would have to answer to code the system. You answer the questions & Pearl uses built-in logic to construct both subroutines & mainline programs. The system then compiles & executes your program code.

- Level 1: For Personal Computing - **$130.**
- Level 2: The Business Assistant - **$350.**
- Level 3: Advanced Software Development - **$650.**

CBASIC2™ required.
Manuals alone - $25. each

SELECTOR IV™

A totally self-contained CP/M Data Base System providing complete data, procedural, query, and report definition functions. Allows records to be managed on a one-for-one basis, as well as in 'batch' mode where several files can communicate with each other in a variety of ways. Includes multiple 'key fields'. Requires 54K RAM.

$550. Manual alone $25.

Formats: 8″ single density, NorthStar 2D & Micropolis Mod II.

MAGIC WAND™

P/M-based word processing system for 8″ soft-sectored & ″ NorthStar or Micropolis.

- Full screen text editing
- Full text formatting commands
- Merging with external data files
- Variables
- Conditional commands
- True proportional printing

50.

ULTRASORT-II™

The sort/merge/select utility for CBASIC2 written in assembly language. Can be loaded by CBASIC during run-time; also can be used as a stand-alone utility. Formats: 8″ single density, NorthStar 2D & Micropolis Mod II.

$175.

CBASIC2™

Industry standard intermediate code compiler with run-time interpreter. Features include chaining, integer & external precision arithmetic. CP/M, MP/M & relocated TRS-80 versions available. As well as 8″ single density, NorthStar 2D & Micropolis Mod II.

$120.

TEXTWRITER III™

NEW FEATURES! a text formatting program for NorthStar & TRS-80 DOS, Micropolis MDOS & any CP/M based system.

- ★ Proportional spacing & enhanced printing for
  - Diablo • Qume • NEC printers
- ★ Enhanced printing includes ribbon color change, dual pitch, reverse line feed,
  - UNDERSCORE
  - **BOLDFACE**
  - DOUBLE STRIKE
  - STRIKEOUT
  - SUPERSCRIPT
  - SUBSCRIPT

$125. Manual alone - $25.

inquiry card.

Report Writer is a trademark of Carolina Business Computers, Inc. Payson & FILETRAN are trademarks of Ready Corp. Selector IV is a trademark of Micro-Ap, Inc. Pearl is a trademark of CPU International Pascal/M & ACT are trademarks of Sorcim CBASIC2 is a trademark of Compiler Systems, Inc. Magic Wand is a trademark of Small Business Applications, Inc. Textwriter & Datebook are trademarks of Organic Software Ultrasort II is a trademark of Computer Control Systems, Inc. Copywriter is a trademark of Systronics TRS-80 is a trademark of Tandy Corp. CP/M & MP/M are trademarks of Digital Research Superbrain is a trademark of Intertec Data Systems S-Basic is a trademark of Topaz Programming Prices effective until January 1, 1981 For shipping add $4. in US; $10. outside US per package California residents add appropriate state sales tax Terms: Prepaid check, M/C or VISA or in US COD (UPS) Dealer inquiries invited

sional and business worlds as well.

Microsoft plans to charge an initial fee for the package ranging from a low of $500 to $3000 for a four-user system. The company also has plans to adapt its BASIC, FORTRAN , and COBOL compilers to run under XENIX. Microsoft has purchased a DEC PDP-11/70 minicomputer specifically for the XENIX development project. The Z8000 version is slated for introduction by year's end, and the 8086 and 68000 versions are to follow sometime in the second quarter of 1981.

Considering that Digital Research plans on developing only an 8086 version of its very popular CP/M operating system, it seems likely that Microsoft's XENIX will become the dominant operating system for 16-bit microcomputer systems.

5-Inch Winchester Disk Drives Coming On Strong: At least a half-dozen companies will have 5-inch hard-disk drives on the market late in the first half of 1981. Latest to jump on the 5-inch disk-drive bandwagon are International Memories Inc (IMI) (the Cupertino, California, firm that marketed the first 8-inch Winchester drive) and Shugart Associates (the largest producer of floppy-disk drives). These drives typically store 5 million to 7 million bytes and sell for less than $1000 in OEM (original equipment manufacturer) quantities.

64 K-Bit Memory Devices Becoming Available: Several integrated-circuit manufacturers are currently supplying samples of the new 64 K-bit programmable memory circuits to OEMs for evaluation and development. Look to see these devices in use starting in early 1981.

The introduction of these components has already caused the price of 16 K-bit devices to drop significantly; just a few months ago, these circuits cost six to eight dollars—now they are four or five dollars. Currently, the 64 K-bit memories are in the forty- to sixty-dollar range, which may drop to thirty or thirty-five dollars in production quantities.

It is expected that Japanese suppliers will dominate the 64 K-bit device marketplace. The 16 K-bit device market has been dominated by American suppliers, although the Japanese currently have 40% of that market. The demand for the 64 K-bit memories does not, as yet, appear to be very strong. However, the price erosion of the 16 K-bit memories and increasing competition from Japanese suppliers should cause the 64 K-bit memory prices to drop quickly.

Protecting The Software Copyright: Software vendors are very concerned about software being pirated by unauthorized copying. The problem is acute simply because it is very easy to duplicate cassette- and disk-based software. Further, it isn't especially difficult to copy software stored in read-only memories.

The personal-computer user does not appear to be the cause of the problem because most of that type of pirating is for personal use, and it occurs only on a small scale without a significant impact on vendor sales. However, several software vendors are complaining that software pirates are making copies of their software packages and selling them. The software pirate frequently changes the name of the software package and may even make some minor changes so that the consumer is unaware that the software is a fraud. The practice appears to be widespread outside the US, where this kind of activity is very difficult to prevent.

As a result, software vendors are seeking ways to prevent pirating. Several are now experimenting with software techniques that cause the copied software to self-destruct if it is run on an unauthorized machine. I suspect that this will prove to be a deterrent for the experimenter and small-time thief, but the professional software pirate should be able to overcome this system.

Tandy, Apple, And Commodore Are Top Personal-Computer Performers: Each year *Datamation* analyzes and rates the top one hundred computer companies. For the second year in a row, Tandy Corporation (parent company of Radio Shack), Apple Computer, and Commodore have made that list. In fact, for this past year Tandy ranked thirty-ninth (up from last year's fifty-eighth), Apple ranked sixty-first (up from one-hundredth last year), and Commodore ranked seventy-fifth (up from ninety-fourth last year). Tandy had gross sales of $150 million, a 131% increase. Apple had $75 million in sales, up from $10 million the previous year, a 650% increase. Commodore had $55 million sales, a 150% increase.

These three personal-computer makers had the highest growth rates of the top one hundred computer-product vendors in the US. IBM, which ranked number one in total sales, had only a 7% increase in sales.

Talking Computers To Be The Rage: 1981 should be the year that consumers first see the widespread use of voice output in products ranging from computers to household appliances. Many manufacturers are currently supplying samples of speech-synthesis integrated circuits to OEM customers. The manufacturers include Texas Instruments, National Semiconductor, General Instrument, Hitachi, and Votrax. The Hitachi HD38880 integrated circuit, for example, can produce up to 200 words or one hundred seconds of speech from data stored in a 128 K-bit ROM (read-only memory). The Texas Instruments TMS5200, essentially the same device used in the Speak & Spell toy, has been given an 8-bit data-bus interface and should operate easily with personal computers.

Random Rumors: It is rumored that Intel, Motorola, and Fujitsu are all working on the development of microprocessors that will implement the IBM System/370 instruction set. Performance is expected to be comparable to an IBM 370/115. IBM is rumored to already have such an integrated-circuit version running.... Xerox is rumored to be attempting to buy Apple Computer.... Digital Equipment Corporation is rumored ready to release a 16-bit microprocessor device that will be compatible with 8080, Z80, and 6800 support circuits. It is expected to have the power of a PDP-11/23. At least one company is rumored to be investigating an S-100 implementation....

MAIL: I receive a large number of letters each month as a result of this column. If you write to me and wish a response, please include a stamped, self-addressed envelope.

Sol Libes
POB 1192
Mountainside NJ 07092

CP/M®[1] – based Business Software for TRS-80®[2] computers on . . .
. . . the fastest Mod-II CP/M with the most features!!!

- Over 610,000 bytes/disk
- Downloading package included
- 1,200 baud operation of serial printers without data loss
- Single drive backup

MOD-II CP/M $250.00

- Mixed single/double density on any of 4 drives (even a 1-drive system)
- Ultra-fast disk operation
- Emulation of cursor addressing for any of several "dumb" CRTs

MOD-I CP/M $150.00

- Auto-LF printer support & ASCII top-of-form software (LPIII)
- Supplemental document describing our implementation
- User-settable function keys

CBASIC2®[3] (Mod I or II) $110.00

The following software for Mod-II CP/M only unless otherwise stated (*-requires CBASIC2):

RM/COBOL®[4] – Only COBOL for CP/M with alternate keys (multi-key ISAM), CRT screen handling, interactive debug, Z80 code, and the most useful Level 2 features. **Compatible with Tandy's COBOL–but runs faster!** $495.00

PMS (Property Management System) - Interactive, menu-driven system includes full G/L, budgeting, cash journal, delinquency list, tenant activity/rent roll, complete audit trail and reports on vacancies, lost rent, and vendors $650.00*
demo disk & manual 75.00*

APH (Automated Patient History) - General-purpose question-asking, answer-printing system furnished as self-administered review-of-systems general patient history (Mod-I also) ... $175.00*

MAGIC WAND®[5] – Full-feature word processing, true proportional spacing, file merging, and use of full-screen editor for source programs or data $400.00

RPA (Residential Property Analysis) - Analyzes income and expense, financing, taxes, inflation and depreciation on home, condo, or apartments over a user-selectable time. Shows payoff in terms of ROI, Cap rate, cash-on-cash. Amortization schedules and worksheet $300.00*
demo disk & manual 35.00*

RBC (Rent/Buy Comparison) - Sales or investment tool to compare renting and savings account investment vs. purchasing a particular property $250.00*
demo disk & manual 35.00*

Osborne & Assoc. CBASIC source programs (Mod-I also):

Payroll w/Cost Accounting $250.00*
Accts. Payable/Accts. Receivable $250.00*
General Ledger w/Cash Journal $250.00*
O&A CBASIC Books (ea.) ..... $ 20.00

Verbatim®[6] media: (Qty. 100 prices)

5¼" single density ..... $2.50 ea.
8" certified double density ..... $4.00 ea.
8" single density ..... $ 3.00 ea.
450' tape cartridges ..... $20.00 ea.

CYBERNETICS INC
8041 Newman Ave., Suite 208
Huntington Beach, CA 92647
(714) 848-1922

Registered trademark of:
®[1]Digital Research
®[2]Tandy Corp.
®[3]Compiler Systems, Inc.
®[4]Ryan-McFarland Corp.
®[5]Small Business Applications, Inc.
®[6]Verbatim Corp.

Distributed in U.K. by:
Microcomputer Applications Ltd.
11, Riverside Court,
Caversham, Reading, England
TEL: (0734) 470425

DG/H8 — THE TOTAL SYSTEMS CONCEPT

THE DG-80 ZILOG Z80 BASED CPU — $249.00 (Documentation Only $25.00)

FEATURES:
• Compatible with Heath® H8 hardware and software • Z80 CPU — Enhanced instruction set • Provisions for up to 8K ROM/EPROM and/or 4K RAM • Jump-On-Reset to any 1K boundary • DIP switch selectable wait states for any or all 8K blocks of memory • All Z80 interrupt response modes available • Interrupt Acknowledge and Dynamic Memory Refresh signals available on bus • Frequently selected options by DIP switch or solderless jumper • Machined contact gold sockets for ROM/EPROM, RAM • Includes many advanced features for future expansion • Assembled, tested and guaranteed • Extensive operations manual and Z80 PROGRAMMING MANUAL
90 DAY WARRANTY

DG-64D 64K – $529.00 48K – $480.00 32K – $431.00 16K – $382.00 ØK – $333.00

BEST RAM EVER AVAILABLE FOR THE H8.

FEATURES:
• Up to 64K bytes capacity Dynamic RAM • Hardware bank selectable in 8K increments • Software bank selectable in 16K increments through I/O port • On- board bank select/CPU ROM disable port, addressable to any of 256 I/O addresses • Up to 8 boards controllable through one I/O port (allows page mode operation) • On-board transparent refresh for 8080 or Z80 microprocessor backed up by asynchronous refresh upon loss of normal program execution. • 4 MHz operation with no wait states required • Low power consumption — less than 8 watts • Assembled, tested, & burned-in
90 DAY WARRANTY
Documentation Only $15.00

DG-FP8 — $69.95

Monitor/Utility package for DG-80 CPU provides functions of PAM-8 as well as the following:
• Split Octal or Hexidecimal Entry and Display • Z80 monitor features such as display alternate register sets, display index registers, • "Shorthand" display of memory contents pointed to by general purpose registers • Supports STANDARD CP/M provided by D-G as well as HDOS • Provides firmware support for DG-ADP4, 4 MHz hardware • Includes single step features

Documentation Only - $15.00 (Source Listing Not Included)

DG-ADP4 — $19.95

Plug-in hardware modification to allow operation of the Heath® H17 disk system with the DG-80 at 4 MHz. Requires the use of the DG-FP8 firmware package.

STANDARD CP/M Ver 2.2 $130.00

16K CHIP SETS $49.00

(8-4116 Type Dynamic RAMS) for DG- 32D, DG-64D, Apple®, TRS-80®, H88/ 89®, and Pet®

DG-CMD1 — $29.95

ROM disable port for use with the Heath® H8 computer. Addressable to any of 256 I/O ports. Allows the use of a full 64K of RAM when used in conjunction with the DG-80 CPU and the DG-FP8 hardware/firmware package (NOT REQUIRED FOR SYSTEMS UTILIZING THE DG-64D MEMORY BOARD)

DG-FP8/DG-ADP4 – TOGETHER — $79.95
Save on Combination Purchase Reg. $89.90

DG-32D — 32K — $339.00 — 16K — $287.00 — ØK — $235.00 — DOCUMENTATION $12.00

CP/M is a registered trademark of Digital Research of Pacific Grove, California. Heath, HDOS, H8, H88/89 & PAM8 are registered trademarks of the Heath Company. Z80 is a registered trademark of Zilog Corp. PET is a registered trademark of Commodore. Apple is a registered trademark of Apple Computer. TRS-80 is a registered trademark of TANDY Corp.

D·G ELECTRONIC DEVELOPMENTS CO.

Ordering Information: Products listed available from DG Electronic Developments Co., P.O. Box 1124, 1827 South Armstrong, Denison, Tx. 75020. Check, Money Order, VISA or Master Charge accepted. Phone orders (charge only) call (214) 465-7805. No COD's. Freight prepaid. Allow 3 weeks for personal checks to clear. Texas residents add 5%. Foreign orders add 30%.

Machine Problem Solving

Part 3: The Alpha-Beta Procedure

Professor Peter Frey
Northwestern University
Cresap Neuroscience Laboratory
2021 Sheridan Rd
Evanston IL 60201

Zero-Sum Games

In many problem-solving situations, the wisdom of a particular decision often depends upon the range of options that someone else may have. Many real-world decision-making environments can be modeled in terms of a two-person game. When each player is aware of his own and his opponent's options at each choice point, the game is described as one of *perfect information*. If the rules of the game require that each player's gain must come at the expense of the other, then the game is strictly competitive, or *zero-sum*. Familiar games that meet these criteria are chess, checkers, three-dimensional tic-tac-toe, go, gomoku, and Othello.

The first two articles in this series considered decision-making situations in which a single individual was responsible for a series of choices. By constructing programs that searched among a large number of choice combinations, we were successful in developing mechanical solutions for these problems. When two people are making choices and each is trying to better his own position at the other's expense, the standard look-ahead search that we described earlier is no longer adequate.

Minimax Strategy

Instead, it is necessary to consider choices in which the two players attempt to satisfy conflicting goals. Most of the important strategic ideas which are used in analyzing these games date back to a very influential book which was written in 1944 by Von Neumann and Morgenstern (see reference 4).

The key idea for our present purposes is the *minimax* strategy. In analyzing any given position in the game, a look-ahead tree is constructed which represents the sequence of options that the two players have (as a hierarchical branching structure which grows exponentially as one proceeds away from the initial position).

The minimax strategy consists of evaluating "final" positions at some arbitrary depth (usually defined by practical constraints of time and space) and then following parent nodes all the way down the tree to the starting position. This path is defined by assuming that each player will decide among the options that are available to him at *his* choice points by selecting the one that guarantees the best possible outcome.

If the terminal evaluations are chosen such that high numbers favor the first player (and low numbers favor the second player), the first player is expected to choose the pathway that guarantees as large a terminal value as possible, and the second player is expected to choose the pathway that guarantees as small a terminal value as possible. In practical terms, the first player always maximizes, the second player always minimizes.

This description would seem to explain the derivation of the name. This is not historically correct, however. The "minimax" name is actually based on the underlying strategic idea that each player attempts to minimize his opponent's maximum potential gain.

History and Practicality

The minimax technique appeared to be of limited practicality when it was first discovered because of the rapid increase in the number of terminal positions as the look-ahead tree grows. The number of terminal positions that need to be analyzed in a minimax search is equal roughly

DYNACOMP

Quality software for:

ATARI
PET
APPLE II Plus
TRS-80 (Level II)
NORTH STAR
CP/M 8'' Disk

GAMES

BRIDGE 2.0 — **Price: $17.95 Cassette / $21.95 Diskette**

An all-inclusive version of this most popular of card games. This program both BIDS and PLAYS either contract or duplicate bridge. Depending on the contract, your computer opponents will either play the offense OR defense. If you bid too high, the computer will double your contract! BRIDGE 2.0 provides challenging entertainment for advanced players and is an excellent learning tool for the bridge novice.

HEARTS 1.5 — **Price: $14.95 Cassette / $18.95 Diskette**

An exciting and entertaining computer version of this popular card game. Hearts is a trick-oriented game in which the purpose is not to take any hearts or the queen of spades. Play against two computer opponents who are armed with hard-to-beat playing strategies.

CRIBBAGE 2.0 (TRS-80 only) — **Price: $14.95 Cassette / $18.95 Diskette**

This is a well-designed and nicely executed two-handed version of the classic card game, cribbage. It is an excellent program for the cribbage player in search of a worthy opponent as well as the beginner wishing to learn the game, in particular the scoring and jargon. The standard cribbage score board is continually shown at the top of the display (utilizing the TRS-80's graphics capabilities), with the cards shown underneath. The computer automatically scores and also announces the points using the traditional phrases.

CHESS MASTER (North Star and TRS-80 only) — **Price: $19.95 Cassette / $23.95 Diskette**

This complete and very powerful program provides five levels of play. It includes castling, en passant captures and the promotion of pawns. Additionally, the board may be preset before the start of play, permitting the examination of "book" plays. To maximize execution speed, the program is written in assembly language (by SOFTWARE SPECIALISTS of California). Full graphics are employed in the TRS-80 version, and two widths of alphanumeric display are provided to accommodate North Star users.

STARTREK 3.2 — **Price: $ 9.95 Cassette / $13.95 Diskette**

This is the classic Startrek simulation, but with several new features. For example, the Klingons now shoot at the Enterprise without warning while also attacking starbases in other quadrants. The Klingons also attack with both light and heavy cruisers and move when shot at! The situation is hectic when the Enterprise is besieged by three heavy cruisers and a starbase S.O.S. is received! The Klingons get even!

SPACE TILT (Apple only) — **Price: $10.95 Cassette / $14.95 Diskette**

Use the game paddles to tilt the plane of the TV screen to "roll" a ball into a hole in the screen. Sound simple? Not when the hole gets smaller and smaller! A built-in timer allows you to measure your skill against others in this habit-forming action game.

GAMES PACK I and GAMES PACK II — **Price: $ 9.95 each, Cassette / $13.95 each, Diskette**

GAMES PACK I contains BLACKJACK, LUNAR LANDER, CRAPS, HORSERACE, SWITCH and more. GAMES PACK II includes CRAZY EIGHTS, JOTTO, ACEY-DUCEY, LIFE, WUMPUS and others.

Why pay $5.95 or more per program when you can buy a DYNACOMP collection for just $9.95?

STATISTICS and ENGINEERING

DATA SMOOTHER — **Price: $14.95 Cassette / $18.95 Diskette**

This special data smoothing program may be used to rapidly derive useful information from noisy business and engineering data which are equally spaced. The software features choice in degree and range of fit, as well as smoothed first and second derivative calculation. Also included is automatic plotting of the input data and smoothed results.

FOURIER ANALYZER — **Price: $14.95 Cassette / $18.95 Diskette**

Use this program to examine the frequency spectra of limited duration signals. The program features automatic scaling and plotting of the input data and results. Practical applications include the analysis of complicated patterns in such fields as electronics, communications and business.

TFA (Transfer Function Analyzer) — **Price: $19.95 Cassette / $23.95 Diskette**

This is a special software package which may be used to evaluate the transfer functions of systems such as hi-fi amplifiers and filters by examining their response to pulsed inputs. TFA is a major modification of FOURIER ANALYZER and contains an engineering-oriented decible versus log-frequency plot as well as data editing features. Whereas FOURIER ANALYZER is designed for educational and scientific use, TFA is an engineering tool.

FOURIER ANALYZER and TFA may be purchased together for a combined price of $29.95 (Cassettes) and $37.95 (Diskettes).

REGRESSION I — **Price: $19.95 Cassette / $23.95 Diskette**

REGRESSION I is a unique and exceptionally versatile one-dimensional least squares "polynomial" curve fitting program. Features include very high accuracy; an automatic degree determination option; an extensive internal library of fitting functions; data editing; automatic data and curve plotting; a statistical analysis (e.g., standard deviation, correlation coefficient, etc.) and much more. In addition, new fits may be tried without reentering the data. REGRESSION I is certainly the cornerstone program in any data analysis software library.

Circle 156 on inquiry card.

Availability

DYNACOMP software is supplied with complete documentation containing clear explanations and examples. All programs will run within 16K program memory space (ATARI requires 24K). Except where noted, programs are available on ATARI, PET, TRS-80 (Level II) and Apple (Applesoft) cassette and diskette as well as North Star single density (double density compatible) diskette. Additionally, most programs can be obtained on standard 8" CP/M floppy disks for systems running under MBASIC.

BUSINESS and UTILITIES

MAIL LIST II (North Star only) — **Price: $21.95**

This many-featured program now includes full alphabetic and zip code sorting as well as file merging. Entries can be retrieved by user-defined code, client name or Zip Code. The printout format allows the use of standard size address labels. Each diskette can store more than 1100 entries (single density; over 2200 with double density systems)!

TEXT EDITOR I (Letter Writer) — **Price: $14.95 Cassette / $18.95 Diskette**

An easy to use, line-oriented text editor which provides variable line widths and simple paragraph indexing. This text editor is ideally suited for composing letters and is quite capable of handling much larger jobs.

FINDIT (North Star only) — **Price: $19.95**

This is a three-in-one program which maintains information accessible by keywords of three types: Personal (e.g., last name), Commercial (eg: plumbers) and Reference (eg: magazine articles, record albums, etc). In addition to keyword searches, there are birthday, anniversary and appointment searches for the personal records and appointment searches for the commercial records. Reference records are accessed by a single keyword or by cross-referencing two or three keywords.

DFILE (North Star only) — **Price: $19.95**

This handy program allows North Star users to maintain a specialized data base of all files and programs in the stack of disks which invariably accumulates. DFILE is easy to set up and use. It will organize your disks to provide efficient locating of the desired file or program.

COMPARE (North Star only) — **Price: $12.95**

COMPARE is a single disk utility software package which compares two BASIC programs and displays the file sizes of the programs in bytes, the lengths in terms of the number of statement lines, and the line numbers at which various listed differences occur. COMPARE permits the user to examine versions of his software to verify which are the more current, and to clearly identify the changes made during development.

COMPRESS (North Star only) — **Price: $12.95**

COMPRESS is a single-disk utility program which removes all unnecessary spaces and (optionally) REMark statements from North Star BASIC programs. The source file is processed one line at a time, thus permitting very large programs to be compressed using only a small amount of computer memory. File compressions of 20-50% are commonly achieved.

GRAFIX (TRS-80 only) — **Price: $12.95 Cassette / $16.95 Diskette**

This unique program allows you to easily create graphics directly from the keyboard. You "draw" your figure using the program's extensive cursor controls. Once the figure is made, it is automatically appended to your BASIC program as a string variable. Draw a "happy face", call it H$ and then print it from your program using PRINT H$! This is a very easy way to create and save graphics.

TIDY (TRS-80 only) — **Price: $10.95 Cassette / $14.95 Diskette**

TIDY is an assembly language program which allows you to renumber the lines in your BASIC programs. TIDY also removes unnecessary spaces and REMark statements. The result is a compacted BASIC program which uses much less memory space and executes significantly faster. Once loaded, TIDY remains in memory; you may load any number of BASIC programs without having to reload TIDY!

SIMULATIONS and EDUCATION

BLACK HOLE (Apple only) — **Price: $14.95 Cassette / $18.95 Diskette**

This is an exciting graphical simulation of the problems involved in closely observing a black hole with a space probe. The object is to enter and maintain, for a prescribed time, an orbit close to a small black hole. This is to be achieved without coming so near the anomaly that the tidal stress destroys the probe. Control of the craft is realistically simulated using side jets for rotation and main thrusters for acceleration. This program employs Hi-Res graphics and is educational as well as challenging.

VALDEZ — **Price: $14.95 Cassette / $18.95 Diskette**

A simulation of supertanker navigation in the Prince William Sound and Valdez Narrows. The program uses an extensive 256X256 element radar map and employs physical models of ship response and tidal patterns. Chart your own course through ship and iceberg traffic. Any standard terminal may be used for display.

FLIGHT SIMULATOR — **Price: $17.95 Cassette / $21.95 Diskette**

A realistic and extensive mathematical simulation of take-off, flight and landing. The program utilizes aerodynamic equations and the characteristics of a real airfoil. You can practice instrument approaches and navigation using radials and compass headings. The more advanced flyer can also perform loops, half-rolls and similar aerobatic maneuvers.

TEACHER'S PET: I — **Price: $ 9.95 Cassette / $13.95 Diskette**

This is the first of DYNACOMP's educational packages. Primarily intended for pre-school to grade 3, TEACHER'S PET provides the young student with counting practice, letter-word recognition and three levels of math skill exercises.

Ordering Information

All orders are processed and shipped postpaid within 48 hours. Please enclose payment with order along with computer information. If paying by VISA or Master Card, include all numbers on card. For orders outside North America add 10% for shipping and handling.

Add $3.00 for 8" floppy disk (soft sectored, CP/M, Microsoft BASIC)

Deduct 10% when ordering 3 or more programs.

Ask for **DYNACOMP** programs at your local software dealer. Write for detailed descriptions of these and other programs from **DYNACOMP**.

DYNACOMP, Inc.
6 Rippingale Road
Pittsford, New York 14534
(716) 586-7579

VISA

master charge

New York State residents please add 7% NYS sales tax.

MORE FOR YOUR RADIO SHACK TRS-80 MODEL I !

THE DATAHANDLER

DATABASE MANAGEMENT SYSTEM IN MMSFORTH

Now the power, speed and compactness of MMSFORTH drive a major applications program for many of YOUR home, school and business tasks! Imagine a sophisticated database management system with flexibility to create, maintain and print mailing lists with multiple address lines. Canadian or the new 9-digit U.S. ZIP codes, and multiple phone numbers, plus the speed to load hundreds of records or sort them on several fields in 5 seconds! Manage inventories with selection by any character or combination. Balance checkbook records and do CONDITIONAL reporting of expenses or other calculations. File any records and recall selected ones with optional upper/lower case match, in standard or custom formats. Personnel, membership lists, bibliographies, catalogs of record, stamp and coin collections—you name it! ALL INSTANTLY, without wasted bytes, and with cueing from screen so good that non-programmers quickly master its use! With manual, sample data files and custom words for mail list and checkbook use.

Technical: Handles data as compressed indexed sequential subfiles of up to 25K characters (9K in 32K RAM). Access 1-4 data diskettes. Modified Quicksort. Optionally precomiles for 5-second program load. Self-adjusts for many routine mods. Structured and modular MMSFORTH source code ideal for custom modifications.

THE DATAHANDLER V1.1, a very sophisticated database management system operable by non-programmers (requires Disk MMSFORTH, 1 drive & 32K RAM); with manuals, ... $59.95*

MMSFORTH

THE PROFESSIONAL FORTH FOR TRS-80 MODEL I

(Over 1,000 systems in use)

MMSFORTH Disk System V1.9 (requires 1 disk drive & 16K RAM) ..... just $79.95*
MMSFORTH Cassette System V1.8 (requires Level II BASIC & 16K RAM) $59.95*

AND MMS GIVES IT PROFESSIONAL SUPPORT

Source code provided
MMSFORTH Newsletter
Many demo programs aboard
MMSFORTH User Groups
Programming staff can adapt
THE DATAHANDLER to YOUR needs.

MMSFORTH UTILITIES DISKETTE: includes FLOATING POINT MATH (L.2 BASIC ROM routines plus Complex numbers, Rectangular-Polar coordinate conversions, Degrees mode, more), plus a full Forth-style Z80 ASSEMBLER; plus a powerful CROSS-REFERENCER to list Forth words by block and line. All on one diskette (requires MMSFORTH, 1 drive & 16K RAM), .. $39.95*

FORTH BOOKS AVAILABLE

MICROFORTH PRIMER — comes with MMSFORTH; separately $15.00*
USING FORTH — more detailed and advanced than above $25.00*
URTH TUTORIAL MANUAL — very readable intro. to U/Rochester Forth $19.95*
CALTECH FORTH MANUAL — good on Forth internal structure, etc $6.95*

* — Software prices are for single-system user license and include manuals. Add $2.00 S/H plus $1.00 per additional book; Mass. orders add 5% tax. Foreign orders add 15%. UPS COD, VISA & M/C accepted; no unpaid purchase orders, please.

Send SASE for free MMSFORTH information. Good dealers sought.

Get MMSFORTH products from your computer dealer or

MILLER MICROCOMPUTER SERVICES (B2)

61 Lake Shore Road, Natick, MA 01760
(617) 653-6136

Circle 157 on inquiry card.

to the average number of options at each choice raised to a power equal to the depth of the search tree. For example, consider the game of chess, which averages thirty-eight options at each choice point. A minimax search considering a look-ahead of four moves for each player would have 38^8 terminal positions. That is more than 4 trillion (4,000,000,000,000) positions.

You do not have to be a mathematical genius in order to determine that a process that grows exponentially like this one is going to get out of control very quickly. Because of this exponential explosion and because there were no computers in the 1940s, the minimax algorithm initially received little attention.

In practical terms, the first player always maximizes, the second player always minimizes.

The Alpha-Beta Technique

In 1956, at the Dartmouth Summer Research Conference on Artificial Intelligence (see reference 1), John McCarthy pointed out that Bernstein's chess program did not need to analyze all of the terminal positions in order to select the move that was best in terms of the minimax strategy.

Although no formal description of the idea was given at that time, several of the game-playing programs written in the late 1950s appear to have employed an enhanced version of the minimax procedure, which has come to be called the α-β (ie: alpha-beta) pruning algorithm. The name seems to have been coined by McCarthy.

The first clear description of the technique for English-speaking audiences was published in 1969 by Slagle and Dixon (see reference 3). The α-β procedure provides a remarkable increase in the efficiency of the search process; and, with the advent of the high-speed computer in the late 1960s and 1970s, the minimax idea finally came of age.

Although there are many references to the α-β minimax technique in the popular literature, the procedure has not received much detailed analysis in the academic literature. The best expository presentation on this topic is a recent paper by Knuth and Moore (see reference 1). The technical details that enhance the efficiency of the α-β strategy are scattered throughout a number of hard-to-find sources. The purpose of this article is to summarize the main ideas and to present a sample program with the key algorithms.

Treasure Search

To provide an explicit example, I have devised a new game that is easy to play and is easily programmed. One of the difficulties of describing the α-β minimax procedure within the context of a familiar game is that move generation and position evaluation are sufficiently complex that these aspects of the program tend to mask the fine points of the α-β search. The game we will consider involves very straightforward move-generation and position-evaluation routines. For this reason, we will be

An Extraordinary Offer to introduce you to the benefits of Membership in

ELECTRONICS BOOK CLUB

invites you to take this 1,442-page Computer Library for only

$2.95



You Get ALL FIVE Of These Huge Books For Only $2.95

- ✓ Only $2.95 for ALL FIVE!
- ✓ Regular List Price $64.75
- ✓ Top-Quality Hardbinding
- ✓ Contains the very latest info on computers!
- ✓ Over 500 illustrations
- ✓ Contains over 275,000 words
- ✓ 1442 data-packed pages

Troubleshooting Microprocessors And Digital Logic

A complete guide to modern microprocessor/microcomputer troubleshooting and servicing that shows you how to do it all . . . how to understand and troubleshoot digital/logic and microprocessor circuits, how to dig into their operating systems, and how to locate and repair problems quickly and easily. You'll learn about binary codes, system interfacing, input/output devices, flowcharts, using oscilloscopes, logic probes, etc., when troubleshooting, testing, and repairing TTL logic gates, clock pulses, random-access memories, CPU's, VCR's, videodisc players, complete minicomputer systems like the TRS-80, TV games, TV tuners. 308 pps., 229 illus. List $12.95

Handbook Of Microprocessor Applications

How to use microprocessors in a wide variety of applications . . . including interfacing and using machine language programming! Clearly explains and examines the concepts crucial to the use of microprocessors and fully details every phase of logic and machine decisions: Boolean algebra, the truth table, OR, NOR, AND and NAND functions, etc. Learn to document and analyze a problem, locate any given step, calculate forward jumps, use timing loops, calculate delays and more. State machines, input/output functions, data buses, ROM and RAM. This book is practical . . . and focuses on the how-to of using microprocessor chips. 308 pps., 94 illus. List $14.95

The BASIC Cookbook

A complete dictionary of all BASIC statements, commands, and functions—with programming examples and flowcharts—thoroughly defines the BASIC vocabulary, illustrates the definitions with sample programs, and clarifies the programs with matching flowcharts. You'll learn how to use each BASIC term in a workable program. ARRAY, COS, END, FOR-TO, GOSUB, INPUT, LIST, RANDOMIZE, REM, SCRATCH, SGN, SQR, TAN. It also defines programming terms that apply to APL, ALGOL, COBOL, FORTRAN, RPG, PL1, and other languages. 140 pps., 49 illus. List $7.95

PASCAL

A programmer's guide to using Pascal, Tiny Pascal and Supersoft Tiny Pascal . . . including actual programs and helpful exercises! Starting with how to load a Tiny Pascal cassette into a TRS-80 system, goes through all the steps necessary to become proficient in this new language. Learn to read syntax diagrams; use WRITE statements to print characters and do TRS-80 graphics; enter integers with READ statements; use logic with AND, OR and NOT, etc. You'll also find out how to put together complete READ and WRITE programs, and use repetitive (looping) statements to write unending loops . . . plus how to "goof-proof" entries. 350 pps., 106 illus. List $15.95

1001 Things To Do With Your Personal Computer

Over 1,000 time-saving, money-saving, effort-saving and just-plain-fun applications—with actual programs, printouts, flowcharts, diagrams and illustrations. Twelve Chapters contain programs for any use and taste, and applications for everyone: business and financial mathematical, technical and scientific, educational, statistical, control and peripheral, hobbies and games. Includes a shorthand translator, weather forecasting, precise values for camera settings, animated films, model railroads, controlling household devices like wood stoves, Morse code, almost 100 games. 336 pps., 100 illus. List $12.95

Let us send you this 5-volume, 1,442 page Computer Library as part of an unusual offer of a Trial Membership in Electronics Book Club.

Here are quality hardbound volumes, each especially designed to help you increase your know-how, earning power, and enjoyment of electronics and computers. Whatever your interest in electronics/computers, you'll find Electronics Book Club offers practical, quality books that you can put to immediate use and benefit.

This extraordinary offer is intended to prove to you, through your own experience, that these very real advantages can be yours . . . that it *is* possible to keep up with the literature published in your areas of interest, and to save substantially while so doing. As part of your Trial Membership, you need purchase as few as four books during the coming 12 months. You would probably buy at least this many anyway, without the substantial savings offered through Club Membership.

To start your Membership on these attractive terms, simply fill out and mail the coupon today. You will receive the 5-volume Computer Library for 10-day inspection. YOU NEED SEND NO MONEY. If you're not delighted, return the books within 10 days and your Trial Membership will be cancelled without cost or obligation.

ELECTRONICS BOOK CLUB, Blue Ridge Summit, Pa. 17214

Facts About Club Membership

- The 5 introductory books carry a publisher's retail price of $64.75. They are yours for only $2.95 for all 5 (plus postage/handling) with your Trial Membership.
- You will receive the Club **News**, describing the current Selection, Alternates, and other books, every 4 weeks (13× a year).
- If you want the Selection, do nothing: it will be sent to you automatically. If you do not wish to receive the Selection, or if you want to order one of the many Alternates offered, you simply give instructions on the reply form (and in the envelope) provided, and return it to us by the date specified. This date allows you at least 10 days in which to return the form. If, because of late mail delivery, you do not have 10 days to make a decision and so receive an unwanted Selection, you may return it at Club expense.
- To complete your Trial Membership, you need buy only four additional monthly Selections or Alternates during the next 12 months. You may cancel your Membership any time after you purchase these four books.
- All books—including the Introductory Offer—are fully returnable after 10 days if you're not completely satisfied.
- All books are offered at low Member prices, plus a small postage and handling charge.
- **Continuing Bonus:** If you continue after this Trial Membership, you will earn a Dividend Certificate for every book you purchase. Three Certificates plus payment of the nominal sum of $1.99 will entitle you to a valuable Book Dividend of your choice which you may choose from a list provided Members.

ELECTRONICS BOOK CLUB

Blue Ridge Summit, Pa. 17214

Please open my Trial Membership in ELECTRONICS BOOK CLUB and send my 5-volume Computer Library, invoicing me for only $2.95 plus shipping. If not delighted, I may return the books within 10 days and owe nothing, and have my Trial Membership cancelled. I agree to purchase at least four additonal books during the next 12 months after which I may cancel my membership at any time.

Name _____ Phone _____

Address _____

City _____

State _____ Zip _____

(Valid for new Members only. Foreign and Canada add 15%.) **BY-1180**

Circle 158 on inquiry card.

able to concentrate on the tree-searching algorithm in the absence of unwanted distractions.

This new game is called Treasure Search and is played on an 8-by-8 grid. A digit between 1 and 9 is randomly assigned to each of the sixty-four squares. Each contestant has a single playing piece which is initially positioned in the central portion of the grid. The players take turns moving their pieces. A piece can be moved only one square at a time in one of four orthogonal directions (ie: north, south, east, or west). The object of the game is to visit squares where a large number has been assigned and to collect as many of these as possible. Once a number has been taken from a square, that location is empty and subsequent visits provide no additional benefits. The first player to accumulate one hundred or more points wins the game.

Table 1 depicts the playing board as it might appear at the start of the game. The human player has the token designated as "X" and always moves first. Move selection is made by pressing one of the four arrow keys (←,→,↑,↓) on the computer keyboard. The program I will present is written for the Radio Shack TRS-80 computer in Level II BASIC.

Treasure Search 4

	8	6	1	7	5	8	9	6
	4	9	5	6	2	6	9	1
George	4	1	4	6	4	7	4	1
0	9	1	4	*	7	5	3	5
	6	2	5	9	X	4	4	4
TRS-80	5	9	9	3	4	8	8	1
0	3	7	6	2	4	5	1	8
	8	8	6	4	6	9	1	3

Which Direction for X?

Table 1: *Starting position for Treasure Search. The human player moves the "X" one square at a time and attempts to collect as many big numbers as possible. The computer moves the "*" on alternate turns with the same objective. The first player to accumulate one hundred points wins.*

The Treasure Search Game

The specific numbers that appear in table 1 are set randomly at the beginning of each game; therefore, a new playing field is present for each and every game. The strategy for each player is to find a pathway in which he can collect large numbers for himself and at the same time deny large numbers to his opponent. The game was originally planned for young children. I have subsequently found that it is fun for children of all ages.

To begin my presentation, I will provide a listing of the computer instructions for creating the playing field and accepting moves from the human player. Subsequently, I will present the algorithm for selecting moves for the machine and then discuss enhancements that substantially increase the efficiency of the search.

The Program

The initial statements in this program are very similar to those at the beginning of its two predecessors. Certain housekeeping functions are required, such as setting aside memory for string storage, clearing the video display, telling the machine to treat all variables as integers, resetting the "seed" for the random-number generator, and initializing important variables:

```
100 CLEAR 100: CLS: DEFINT A-Z: RANDOM:
    SH = 0: ST = 0
```

(Several versions of this program are given in the body of the text and in listings 1 thru 3.) The variables SH and ST represent the cumulative score for the human and the TRS-80, respectively.

Our next objective is to solicit the human player's name so that we can communicate with him in a civilized manner:

```
110 PRINT@463, "PLEASE ENTER YOUR NAME";:
    INPUT N$
```

The next step is to create several arrays that will be needed by the program. Two arrays are needed for remembering move directions (A and D), one is needed to provide an internal representation of the playing field (B), and several more are used by the tree search: M stores the move that is being considered at each level of the look-ahead tree; E stores the evaluation score for each of those moves; Q keeps track of which moves have been considered at each level of the tree; V keeps track of the best pathway value for each level of the tree; Z



We have discounts, manufacturer's warranties, FREE shipping and insurance **and** a TOLL FREE ORDER NUMBER available.
CALL US!
Pan American Electronics
Incorporated
MasterCard a Radio Shack VISA
AUTHORIZED SALES CENTER
1117 Conway, Mission, Texas 78572
TOLL FREE ORDER NUMBER 800/531-7466
Texas & Principal Number 512/581-2765

Circle 159 on inquiry card.

The Software Exchange has it all!

One phone call

1-800-258-1790

gives you access to all these fine companies.

(IN NH CALL 673-5144)



SOFTWARE

Microsoft
Apparat
Racet
Hayden
Muse
Ritam
Softape
Lance Micklus
Image
Quality Software
Web Associates
Small Systems Software
On-Line Systems
Creative Computing
Personal Software
Scott Adams
Acorn Software
Synergistics
Strategic Simulations
Automated Simulations
Avalon Hill
Micro America
Edu Ware
Instant Software
Interpro
Micro Auto Systems
Peripherals Unlimited
Program Design
Personal Finance Systems
Small Business Systems Group
Syntonic
Seabrees Computing

HARDWARE

Square 1
Computer Resources Company
Radio Shack
Commodore Pet
Atari
Percom
Centronics
NEC
Sun
Okidata
Source/TeleComputing
Computer Case Co.
MicroMint
Eaton LRC
Cover Craft
BSR
BASF
Corvus
Archbold Electronics
ESP
Novation
AMP Recording Studios
Dysan

BOOKS

Hayden
Wiley
Scelbi
Compusoft
Dilithium
Sams
Radio Shack
SoftSide
Addison Wesley
International Jewelers
Dome Publishing

The Software Exchange 6 SOUTH ST., MILFORD, NH 03055

To order: Call Toll-Free 1-800-258-1790 (in NH call (603) 673-5144)

The Software Exchange & HardSide (Div. of Robitaille & Sons, Enterprises, Inc.), SoftSide Publications

MasterCard VISA

Circle 160 on inquiry card.

Circle 161 on inquiry card.

CP/A

OPTIMIZED SYSTEMS SOFTWARE
PRESENTS
CONTROL PROGRAM/APPLE
the DOS you have been waiting for

OSS CP/A is an all new, disk-based operating system which provides commands and utilities similar to CP/M®. CP/A has byte and block I/O, a simple assembly language interface, and direct access via Note and Point. And it's easy to add your own commands or device handlers. CP/A is expandable, flexible, consistent, easy-to-use and available now with compatible program products:

BASIC — Some of the features of OSS BASIC are syntax checking on program entry, true decimal arithmetic (great for money applications), 32K byte string sizes, flexible I/O, long variable names (up to 255 significant characters), and the ability to get and put single bytes.

BUSINESS BASIC WITH PRINT USING — This is virtually the only basic available on the Apple that has PRINT USING. It also has record I/O statements and all the features of our standard BASIC.

EDITOR/ASSEMBLER/DEBUG — OSS EASMD is a total machine language development package. The editor provides functions like FIND, REPLACE, etc. The assembler uses standard 6502 mnemonics, can include multiple files in one assembly, and can place the object code in memory or to a disk file.

Prices of CP/A with:

BASIC	$ 69.95
Business BASIC	84.95
EASMD	69.95
BASIC + EASMD	109.95
Business BASIC + EASMD	124.95

Requires 48K RAM and DISK

Add $3.50 for shipping and handling in continental USA. California residents add 6%. VISA/Master Charge welcome. Personal checks require two weeks to clear.

SEE YOUR DEALER or ORDER TODAY

OPTIMIZED SYSTEMS SOFTWARE
is a product of
Shepardson Microsystems, Inc.
20395 Pacifica Dr., Suite 108B
Cupertino, CA 95014
(408) 257-9900

remembers a "killer" move for each level of the tree (this is explained later in this article); and PV is used to remember the principal variation that is selected by the tree search. The lines we will need are:

```
120 DIM A(8), B(99), D(4), E(12), M(12)
130 DIM PV(12,12), Q(12), V(12), Z(12)
```

The array representing the playing field, B, is treated as a 10-by-10 grid with the first row having indices of 0 to 9, the second row, 10 to 19, the third row 20 to 29, etc. With this organization, the "squares" adjacent to any position are always separated by a constant value. The square to the right is always the current square plus 1. The square to the left is always the current square minus 1. To go up, add 10; to go down, subtract 10. For move generation, we create an array with the following coefficients:

```
140 D(1) = -10: D(2) = -1: D(3) = 1: D(4) = 10
```

We will use a special feature of the TRS-80's architecture to produce moves for the human player. A special array is needed to take advantage of the fact that the keyboard is memory-mapped.

```
150 A(1) = 10: A(2) = -10: A(4) = -1:
    A(8) = 1: CLS
```

Since our program is designed for children of all ages, we will let the human player adjust the playing strength of the machine. Young children can play against a weak opponent. Older children can select a more competitive opponent.

```
160 PRINT@461, "TRS-80 PLAYING STRENGTH
    (1 TO 5)";:INPUT Y
```

The larger the number, the deeper we will have the machine search.

The variable DM is used to set the maximum depth of the look-ahead search. It is defined as twice the value Y minus 1. This will produce searches of one ply, three plies, five plies, seven plies, and nine plies for playing-strength settings from 1 to 5. A five-ply search involves three moves for the machine and two for the human opponent. *[A ply is a move by either opponent; the combination of one move by both sides is called a play or a turn; thus two plies equal one move. . .* **GW***]* It is also necessary to create the array that provides an internal representation of the playing field. This is done by assigning a digit from 1 to 9 to each of the squares in the playing area:

```
170 DM = 2*Y: FOR I = 11 TO 88:
    B(I) = RND(9): NEXT I
```

The squares that surround the grid are used to designate the edge of the board and are set to a value of 99 for this purpose:

```
180 FOR I = 0 TO 10: B(I) = 99: NEXT I:
    FOR I = 89 TO 99: B(I) = 99: NEXT I
190 FOR I = 19 TO 79 STEP 10: B(I) = 99:
    B(I + 1) = 99: NEXT I
```

THE OASIS RECIPE FOR QUALITY APPLICATION SOFTWARE.

Happy customers are fast making Single & Multi-User OASIS recognized as *the* super system software. BUT, system software is only as good as the applications it runs. And that's where OASIS really cooks.

Application software developers particularly like OASIS because it lets them blend unique performance features with their own products—in other words, build better software. Security features like User Accounting with Logon, Password and Privilege Level; File and Automatic Record Locking; Private, Shared and Public Files. Speed and convenience of Keyed Index (ISAM) Files. Economy from Compiled Re-Entrant BASIC that makes multi-user systems practical on as little as 64K memory. And lots more.

Because OASIS has better development tools—and more of them—creating very sophisticated software is possible, practical, easier, faster. Just one example: BASIC that is an Interpreter and Compiler with Debugger and Editor. If you do your own development, you'll really appreciate these kinds of features. For software professionals, they make providing superior products much more cost attractive.

Add all the ingredients together and, whether you do it yourself or buy it off the shelf, the pay-off is a wide selection of top-performing, top-quality application software that does more so you do less.

OASIS; Single or Multi-User with a sizzling array of features and tools; almost unlimited software possibilities *(and application software for Single-User OASIS is Multi-User compatible);* the most extensive documentation in the industry—indeed, you get a lot to like. And *that's* put OASIS System Software* among the hottest products on the market.

Drop us a line today for a complete, free Application Software Directory. And see your OASIS Distributor, or send the coupon direct, to get the products you want. Try us. We believe you'll savor the OASIS recipe.

* For Z80 based computers.

OASIS IS AVAILABLE FOR

SYSTEMS: Altos; Compucorp; Cromemco; Delta Products; Digital Group; Digital Microsystems; Dynabyte; Godbout; IBC; Index; Intersystems; North Star; Onyx; SD Systems; TRS 80 Mod II; Vector Graphic; Vorimex.

CONTROLLERS: Bell Controls; Cameo; Corvus; Konan; Micromation; Micropolis; Tarbell; Teletek; Thinkertoys; X Comp.


APPLICATION SOFTWARE AVAILABLE FOR OASIS:

Accounts Payable; Accounts Receivable; General Ledger; Mail List Pak; Order Entry/Inventory Control; Inventory Tracking Pak; Word Processors.

Architects & Pro Designers Timekeeping & Job Cost Analysis; Cable TV Subscriber Billing Sys; Construction Mgt Pak; Construction Pak; Contractors Tracking Pak; Distributors Pak; Dental Office Mgt Pak; Medical Billing Sys; Pharmacy Prescription Processing with A/R; Management Analysis Pak; Real Estate Office Mgt; Restaurant Pak; Sewer & Water Utility Info Pak.

Bisyncronous Communication Pak; 2780/3780/3270 Emulators; File & Screen Mgr with Report Generator; Full Network Data Base Mgt Sys; Game Pak; Hierarchical Data Base Mgt Sys; Radlogs (Radio Station Logs/Schedules/Programming/Billing with A/R, A/P, G/L.

THESE ITEMS ARE NOT AVAILABLE DIRECT FROM PHASE ONE SYSTEMS, INC.—please write for ordering instructions and complete, free Application Software Directory. If you have items you would like listed in the Directory, send us complete information.)

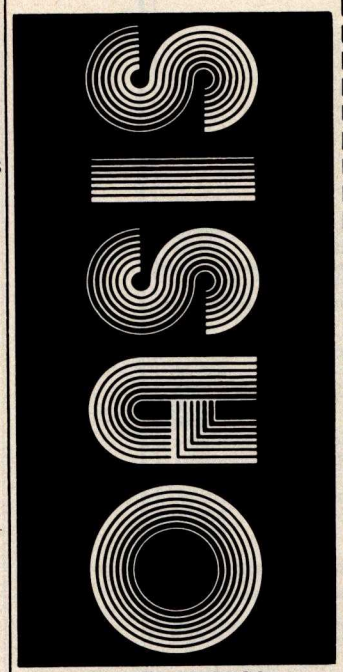

MAKES MICROS RUN LIKE MINIS

PLEASE SEND ME:

Product	Price with Manual	Manual Only
OPERATING SYSTEM (Includes: EXEC Language; File Management; User Accounting; Device Drivers; Print Spooler; General Text Editor; etc.)		
SINGLE-USER	$150	$17.50
MULTI-USER	350	17.50
BASIC COMPILER/ INTERPRETER/DEBUGGER	100	15.00
RE-ENTRANT BASIC COMPILER/INTERPRETER/ DEBUGGER	150	15.00
DEVELOPMENT PACKAGE (Macro Assembler; Linkage Editor; Debugger)	150	25.00
TEXT EDITOR & SCRIPT PROCESSOR	150	15.00
DIAGNOSTIC & CONVERSION UTILITIES (Memory Test; Assembly Language; Converters; File Recovery; Disk Test; File Copy from other OS; etc.)	100	15.00
COMMUNICATIONS PACKAGE (Terminal Emulator; File Send & Receive)	100	15.00
PACKAGE PRICE (All of Above)		
SINGLE-USER	500	60.00
MULTI-USER	850	60.00
FILE SORT	100	15.00
COBOL-ANSI '74	750	35.00

Order OASIS from:

Phase One Systems, Inc.
7700 Edgewater Drive, Suite 830
Oakland, CA 94621
Telephone (415) 562-8085
TWX 910-366-7139

NAME _____
STREET (NO BOX #) _____
CITY _____
STATE _____ ZIP _____

AMOUNT $ _____
(Attach system description; add $3 for shipping; California residents add sales tax)
☐ Check enclosed ☐ VISA
☐ UPS C.O.D. ☐ Mastercharge
Card Number _____
Expiration Date _____
Signature _____

Circle 162 on inquiry card.

Announcing the most important utility ever introduced for the TRS-80* Model I and Model II—

TM

ENHBAS

ENHBAS is an Enhanced Basic extension module, which loads at the top of BASIC, adding many commands and background tasks—

☐Over **30** new commands added to your BASIC:

- **SORT**-Multi-keying, multi-tagging array sort. Sorts thousands of items in mere seconds, all with *one* command!
- **JNAME**-Use line *labels* along with line numbers in branching statements, as in assembly language, using the ENHBAS commands **GTO** and **CSUB** (special GOTO and GOSUB).
  How many times have you wanted to use variables to reference line numbers? Now you can! GTO and CSUB allow variable expressions as operands, such as in **GTO X+40.**
- **WHILE / WEND**-New, structured programming loop construct. Makes for more logical program flow (less GOTO's).
- **EXEC / EVAL**-Two new, extremely powerful functions! **EVAL** evaluates an algebraic expression in string form. With EVAL you can manipulate complex functions in string form, and then evaluate them. **EXEC** executes a string expression *as if it were a BASIC program line!* With EXEC, your computer can actually write its *own* programs and execute them!
- **CALL**-Pass control to machine language subroutines at *any* address, passing parameters *both* ways.
- **CLM / PAGE**-Set up automatic page roll-over and other line printer functions from BASIC.
- ***All these and many more!***

☐In addition to the above commands, Model I ENHBAS contains *vector graphics* and drawing commands. Model II ENHBAS has many functions suited to business programming—ISAM file handling commands, RS-232 access, and many more; along with several Model I BASIC commands left out of Model II (PEEK, POKE, OUT, etc.).

☐ENHBAS includes many background utilities (Model I version):

- ***User-definable cursor***
- ***Key click***
- ***Two-tone beep on error***
- ***Automatic lower-case***
- ***Automatic debounce***
- ***Short-entry commands (Shift-letter prints command)***
- ***Real Control keys***
- ***One letter commands***
- ***Formatted LISTings***

ENHBAS is available for:

16K Model I—Level-II Tape	$39.95
32K Model I Disk	$39.95
32K Model III *(avail. 11/1/80)*	$39.95
32K Model II (on TRSDOS disk)	$99.95

**TRS-80* is a reg. trademark of Radio Shack, a Tandy Co.

Other software:

CSG PILOT-Disk-based, high level language.
32K Model I Disk $59.95
Z-EMULATOR-Executes assem. lang. lines.
16K Model I—Level-II Tape $29.95
32K Model I Disk $29.95
ENHCOMP-Integer subset BASIC compiler. Full graphics. Requires RS Editor/Assembler.
32K Model I Disk $24.95
ABBREV-Level-I abbrev. in Level-II/Disk.
16K Model I—Level-II Tape $24.95
32K Model I Disk $24.95

Dealer and OEM inquiries invited.

The Comsoft Group
6008 N.Keystone Ave., Dept. B
Indianapolis, IN 46220
(317) 257-3227

The playing field also needs to be presented on the video display, along with a title for the game:

```
220 CLS: FOR I = 11 TO 88: IF B(I) = 99 THEN 240
230 X$ = RIGHT$ (STR$ (B(I),1): GOSUB 1000
240 NEXT I: PRINT@22, "TREASURE SEARCH";Y;
```

The subroutine starting at line 1000 computes a location on the video screen (R = row; C = column) and prints a character there:

```
1000 R = INT (I/10): C = I−10*R:
     K = 141 + (8−R)*64+C*4
1010 PRINT@K, X$;: RETURN
```

Our next objective is to enhance our video display by printing the names of the contestants on the left-hand side of the screen where the score will be recorded. We also need to put each player's piece on the playing field and to define several useful variables. Y$ is a string variable of twelve blank spaces. Z$ is similar except it represents thirty-two blank spaces. These two variables will be used when we wish to erase part of the video display. The variable T represents the position (row-column) of the computer piece, and H represents the position of the human piece:

```
250 PRINT@256, N$;: PRINT@448, "TRS-80";:
    Y$ = STRING$ (12, " ")
260 T = 54: T$ = "*": H = 45:
    H$ = "X": Z$ = STRING$ (32, " ")
270 I = T: X$ = T$: GOSUB 1000:
    B(T) = 99: B(H) = 99
280 I = H: X$ = H$: GOSUB 1000: GOTO 300
```

The position where each player's piece is located is not available for a move, so those positions in the B array are temporarily set to the value 99.

Now we are ready to create the module that solicits the human's move. First we will start with a message to present when the requested move is not legal. This can occur if the human attempts to move off the playing field or to a position occupied by the machine's playing piece:

```
290 PRINT@788, "ILLEGAL MOVE, TRY AGAIN";:
    FOR I=1 TO 999: NEXT I
```

In most situations, line 290 will not be executed. Instead, the message will usually be a request for the human player's move:

```
300 PRINT@788,Z$;:
    PRINT@788, "WHICH DIRECTION FOR X";
```

The machine waits for the human's response by doing a rapid cycle from the beginning to the middle of line 310. When a keyboard response occurs, the machine checks a special location in memory that keeps track of the arrow keys and determines which bit has been set by the keypress:

```
310 IF INKEY$ = "" THEN 310 ELSE R = PEEK(16444)
```

The player's response is then processed to determine the

TERRIFIC TRIO: Z80, OASIS, MAROT.

A superior operating system and top application software bring out the best in a microcomputer. That's why Marot offers the OASIS* Operating System and compatible software for owners of Z80 based micros. They make a terrific trio.

1 Z80 MICROS —great machines. Tandy's TRS-80 MOD II® with DMA, bank select possibilities and nationwide service. Altos. Cromemco. Horizon. And many others. Great machines—but it takes a great operating system to tap their full potential.

2 ENTER OASIS —available from Marot. OASIS is fast emerging as *the* operating system for Z80 commercial applications and serious programmers. Why?...rapid formating and back-up of diskettes; efficient disk utilization; excellent line editor and document processor for file management and textwriting; user accounting with logon, password, privilege level and use accounting; machine independence of programs, data and text files; sequential, direct and keyed index (ISAM) files; interpreted and compiled BASIC; COBOL-ANSI '74; single and multi-user versions; and more. No wonder pros say 'OASIS makes micros run like minis!'

3 APPLICATION SOFTWARE —available from Marot. OASIS is your active, invisible partner supporting these excellent, ready-to-run products:

Magic Wand.® The wordprocessor combining the ease of screen editing with micro power.

*HDBS.*** For data management needs restricted to hierarchical tree structure and fixed length records.

*MDBS.*** Handles full network CODASYL oriented data structures and variable length records.

*ABS.**** Quality office management systems—accounts receivable and payable, general ledger, etc.—the total interacting, user-oriented business package. Written in COBOL; available with source code.

A *Law* package. And ready soon: complete medical management, real estate, restaurant, pharmacy, management analysis packages, and others.

Marot and its Dealers offer OASIS and many professional software products to individuals, OEMs and dealers. Licensing arrangements are also available. Just call or write and start your own terrific trio.

PLEASE SEND ME:

(Circle what you would like and send order with payment to the address shown below.)

☐ SEND COMPLETE INFORMATION

Product	Price
MAGIC WAND *	$400
ABS ACCOUNTING (call or write)	
MDBS, full network	$900
HDBS	300
Report Generator, Query System	300
Primer	10
(Other options available)	

Magic Wand, MDBS and HDBS are available for several operating systems.

*OASIS is the trademark of Phase One Systems, Inc.
**HDBS and MDBS are produced by Micro Data Base Systems, Inc.
***American Business Systems, Inc.

TRS-80 is the registered trademark of the Tandy Corporation.
Magic Wand is the registered trademark of Small Business Systems, Inc.

marot

MAROT SOFTWARE SYSTEMS
YOUR EASTERN SOURCE

Product OASIS	Price with Manual	Price Manual Only
OPERATING SYSTEM (Includes: EXEC Language; File Management; User Accounting; Device Drivers; Print Spooler; General Text Editor; etc.)		
SINGLE-USER	$150	$17.50
MULTI-USER	350	17.50
BASIC COMPILER/ INTERPRETER/DEBUGGER	100	15.00
RE-ENTRANT BASIC COMPILER/INTERPRETER/ DEBUGGER	150	15.00
DEVELOPMENT PACKAGE (Macro Assembler; Linkage Editor; Debugger)	150	25.00
TEXT EDITOR & SCRIPT PROCESSOR	150	15.00
DIAGNOSTIC & CONVERSION UTILITIES (Memory Test; Assembly Language; Converters; File Recovery; Disk Test; File Copy from other OS; etc.)	100	15.00
COMMUNICATIONS PACKAGE (Terminal Emulator; File Send & Receive)	100	15.00
PACKAGE PRICE (All of Above)		
SINGLE-USER	500	60.00
MULTI-USER	850	60.00
FILE SORT	100	15.00
COBOL-ANSI '74	750	35.00

Send order to:
Marot Software Systems, Inc.
35 East 85th Street
New York City, NY 10028
Telephone (212) 534-5499

NAME _____
STREET (NO BOX #) _____
_____
CITY _____
STATE _____ ZIP _____
AMOUNT $ _____

(Attach system description; add $3 for shipping; New York residents add sales tax.)
☐ Check enclosed ☐ VISA
☐ UPS C.O.D. ☐ Mastercharge
Card Number _____
Expiration Date _____
Signature _____

Circle 163 on inquiry card.

new square (J) for his piece.

A test is also made to make sure that the new square is on the playing field and not currently occupied by the machine's piece:

```
320 R = INT(R/8): J = H+A(R)
330 IF B(J) = 99 THEN 290 ELSE PRINT@788, Z$;
```

If the move is legal, the necessary changes are made to the video display and to the internal representation of the board. In addition, the player's score is modified approximately and a check is made to determine if the game is over:

```
360 I = H: B(I) = 0: X$ = "−":
    GOSUB 1000: SH = SH+B(J)
370 H = J: B(H) = 99: I = H: X$ = H$:
    GOSUB 1000
380 PRINT@321, SH;: IF SH > 99 THEN 930
```

Move-Selection Strategy

This completes the module for soliciting and processing the move selected by the human player. We can see that Treasure Search is much easier to program than more familiar games such as chess or checkers. We are now ready to address the major focus of this article, namely, move selection by the machine. As a first approximation, I will present a relatively simplistic strategy and then subsequently will consider more sophisticated approaches.

The following initial strategy surveys the playing field in each of the four directions from the current position (T) of the machine's playing piece and selects as the best move (BM) the square which has the largest value (BV):

```
530 BV = −1: I = 0
540 I = I + 1: J = T +D(I): IF B(J) = 99 THEN 560
550 IF B(J) > BV THEN BM = J: BV = B(J)
560 IF I < 4 THEN 540
```

This is equivalent to a look-ahead search of one ply. Once a move has been selected, it is then necessary to make that move on the video display and to make the appropriate changes in the internal representation of the playing field. In addition, the score for the machine needs to be modified and a check needs to be made to determine if the game is over:

```
800 I = T: B(I) = 0: X$ = "−":
    GOSUB 1000: PRINT@179, Y$;
810 T = BM: ST = ST+B(T): B(T) = 99:
    I = T: X$ = T$
820 GOSUB 1000: PRINT@513, ST;:
    IF ST < 100 THEN 300
```

To complete the program, we need two messages to signal the end of the game:

```
910 PRINT@915,
    "THANK YOU FOR A PLEASANT GAME";
920 GOTO 920
930 PRINT@917,
    "CONGRATULATIONS, YOU WIN";: GOTO 920
1000 R = INT(I/10): C=I−10*R:
     K = 141+(8 − R)*64+C*4
1010 PRINT @ K, X$;: RETURN
```

[Please note that this simple version of the game is not the version given in listing 1. To acquire this version, type in all the BASIC lines presented so far in the text. . . GW]

Implementing α-β Techniques

If you run this program on a TRS-80, it will play a legal game, but it will not be particularly challenging. Your children will probably enjoy playing it because they will beat it most of the time. A one-ply look-ahead does not produce brilliant play. To make the machine more intelligent, we need to add the α-β minimax algorithm. To do this, we will substitute the following code for lines 530 to 560:

```
510 DT = DM
520 L = 1: SC = 0: S = −1
530 V(0) = −99: V(1) = −99: M(0) = T:
    M(1) = H
```

The maximum depth of the search, DT, is set to the value DM which was calculated at line 170. Next, we initialize several key variables. The depth of the search (L) starts with a value of 1. The variable that remembers the cumulative difference between the changes in the players' scores (SC) is set to zero. The variable that keeps track of which player has the move (S) is set to a −1.

The array that retains the best values obtained so far at each level of the tree is initialized at a −99 for index values of 0 and 1. The array that keeps track of the move (M) currently being considered at each level of the tree is set to the value T (the location of the machine's piece) for the index value of 0 and to H (the location of the human's piece) for the index value of 1.

The first move considered in the look-ahead process will be for the machine. The value of L at the base of the tree will be 2. You may think this a bit curious, but it is a useful strategy since we will want to refer to V(L − 2) and M(L − 2) at several points in the search process.

To begin the main loop of the tree search, we increase the depth (L) by 1 and then initialize the variable Q (an index for the moves that have already been considered at this level of the tree), the variable S (an index indicating whose turn it is to move), and the variable V (the value for the best move found so far at this level of the tree):

```
540 L = L + 1: Q(L) = 0: S = −S: V(L) = V(L −2)
```

The next step is to increment the Q index so that the machine can consider the next move option at this level of the tree. If we have exhausted all of the move options at this level, it is time to branch to a special section of code that instructs the machine to back up one level in the tree:

```
580 Q(L) = Q(L) + 1: IF Q(L) > 4 THEN 760
```

If the move options at this level have not been exhausted, the machine is instructed to generate the location (J) of a square to which the player can consider moving:

```
590 J = M(L − 2) + D(Q(L))
```

THE ULTIMATE REFINEMENT.
PL/I FOR YOUR MICRO.

IBM's told us about PL/I for years. Now, we're telling them something.

PL/I Subset G. Newly designed expressly for minicomputers by an ANSI committee of PL/I experts. All the best application programming features, refined to match contemporary programming practices.

PL/I-80™ for Microcomputers. Based on Subset G, PL/I-80 runs under our CP/M® and MP/M™ operating systems.

PL/I-80 Means Performance. In an independent benchmark, PL/I-80 was tested against 34 other high-level languages for 8-bit processors, and came out on top. *

PL/I-80 versus the best of several languages:	
PL/I-80	1.00
FORTRAN	1.21
BASIC COMPILER	1.32
PL/M	1.71
PASCAL COMPILER	1.89
PASCAL INTERPRETER	17.07
BASIC INTERPRETER	34.57

*Execution time ratio, Eratosthenes Sieve

Subset G is a brand new language with a new following. DEC®, Data General, and Prime now support it, and the list is growing. There's no better way to protect your software investment.

PL/I-80 from Digital Research. Fast. Economical. Refined. With the programming power of minicomputer PL/I . The package includes compiler, run-time library, linkage editor and relocating macro-assembler, plus three comprehensive manuals. All for only $500.
(Domestic USA price only)

Interested in Refinement?

Call or write Digital Research. Experts in refinement.

DIGITAL RESEARCH®

P.O. Box 579
801 Lighthouse Avenue
Pacific Grove, CA 93950
408-649-3896
TWX 910 360 5001



Circle 164 on inquiry card.

Making Moves

Move generation is quite simple because M(L−2) always represents the current location of the piece of the player whose turn it is to move and D(Q(L)) represents one of the four directions in which a move can potentially be made. I say potentially because the new location could be off the playing field or could already be occupied by the opponent's piece. Our next statement checks for this:

```
600 IF B(J) = 99 THEN 580 ELSE M(L) = J: E(L) = B(J)
```

If the move is legal, the new location is recorded as the current move at this level in array M, and the digit at this location is recorded as the current value at this level in array E. In addition, the internal representation of the playing field, B, is modified to reflect this move, and the variable SC is altered to keep track of the relative points accumulated by each player:

```
610 B(J) = 99: B(M(L − 2)) = 0: SC = SC + S * E(L)
```

In order to provide a visible record of the machine's "thought" process, the machine is instructed to print the move location (J), the cumulative change in the score at this point (SC), and the best value so far at this level, V(L), in the empty area on the right side of the video display. The machine also checks to see if the current depth is the maximum possible depth. If not, it branches to line 540 which starts the main loop again by going one level higher in the tree:

```
620 PRINT@179 + 64*L, J; SC; V(L); " ";:
    IF L < DT THEN 540
```

If the search is at the maximum depth (ie: L = DT), then the machine records the current value of SC as a potential new best value:

```
670 V(L + 1) = −S * SC
```

The next step is to reverse the move we just made. When a new move is made, the board representation is updated at line 610. When the move is taken back at line 680, we refer to the process of "downdating" the board:

```
680 B(M(L)) = E(L): B(M(L − 2)) = 99:
    SC = SC − S * E(L)
```

Negamax

To determine whether the value recorded at line 670 is better than the current value at this level, we employ the *negamax* procedure (see reference 1). This is equivalent to the minimax procedure except that its implementation requires fewer programming steps. Rather than minimizing and maximizing at every other level, the negamax approach always maximizes the results at a given level, but it reverses the arithmetic signs at every other level to produce the identical result as the minimax procedure. (You may recognize the similarity between this approach and the use of the logical NOR operation in circuit design. Two levels of NOR logic are equivalent to a level of ANDs followed by a level of ORs.) The following line implements the negamax calculations:

```
700 IF V(L) < −V(L + 1) THEN
    V(L) = −V(L + 1) ELSE 580
```

If the new value is worse than or equal to the current value, the machine branches to line 580 and considers another move at this level. If the new value is better than the current value, the machine continues to the next statement:

```
740 IF L = 2 THEN BM = M(L):
    PRINT@180, BM; V(2);
```

If the search process is at the base of the tree (L = 2), then the new best move is recorded for later use and an announcement of our new find is printed on the video display. This includes both the new location, BM, and the net difference in the score produced by the anticipated sequence of moves, V(2)

Evaluating for Cutoff


At line 700, the minimax rule was applied to select the best option for the player with the move. The next consideration is whether the current move will produce an α-β cutoff. The logic for this decision is based on the idea that the opponent may already have a move at this level in the tree that guarantees him a value that is at least as

$ GOLD DISK $

CP/M® Compatible Z-80 Disassembler

- RECREATES Z-80 ASSEMBLY LANGUAGE SOURCE FILES FROM ABSOLUTE CODE (.COM FILES) FOR ALTERATION.
- FEATURES MNEMONIC LABELS FOR EASY PROGRAM TRACING.
- INCLUDES COMPLETE DOCUMENTATION AND FREE UTILITY FOR SPECIFYING AND DECODING ASCII SECTIONS OF CODE.
- OPERATES UNDER MINIMUM CP/M* CONFIGURATION (16K RAM).
- DOCUMENTATION ONLY: $12 (MAY BE APPLIED TO DISK ORDER).

$62.00 POSTPAID

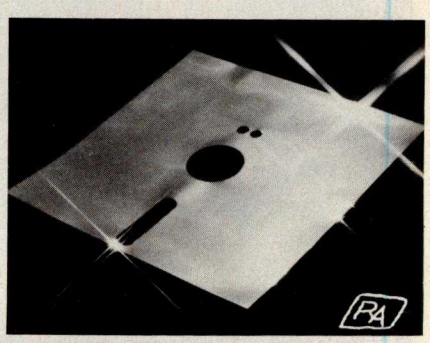

ONE DAY SERVICE FOR CREDIT CARD CUSTOMERS: ORDER DISK BY PHONE FREE! (WE WILL PAY YOU BACK FOR THE PHONE CALL)
CALIF. RESIDENTS ADD 6%. SALES TAX.


VISA master charge

BOWER-STEWART & ASSOCIATES
P.O. BOX 1389
HAWTHORNE, CA. 90250
(213) 676-5055

"WORTH ITS WEIGHT IN GOLD"

SPECIFY DRIVE AND SYSTEM
AVAILABLE ON 5¼" OR 8" IBM SS/SD DISK
*CP/M IS A TRADEMARK OF DIGITAL RESEARCH

Circle 165 on inquiry card.

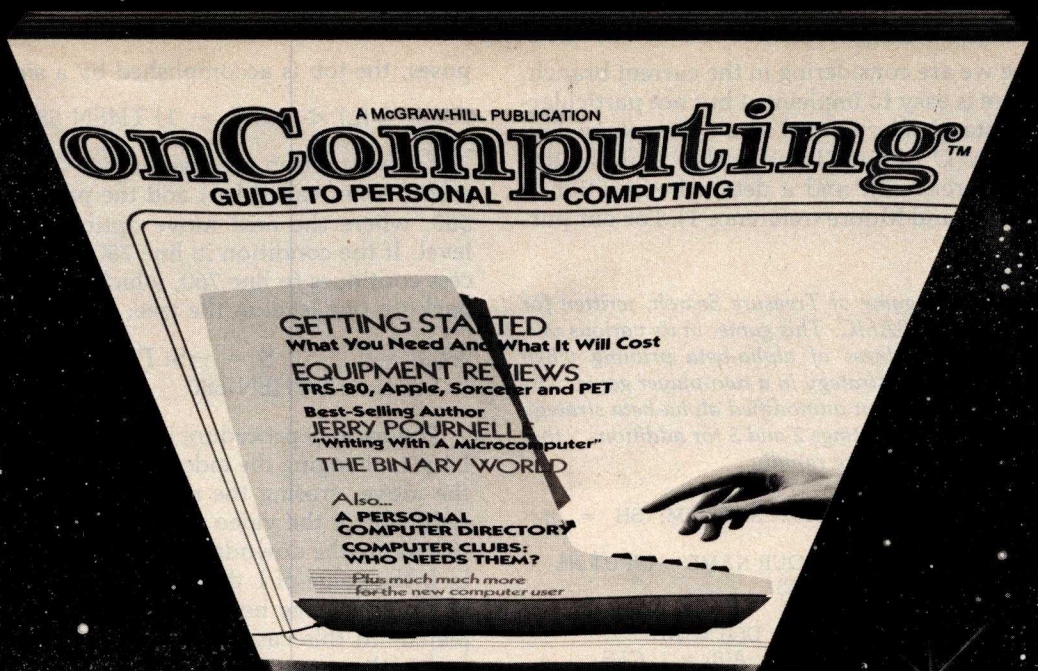

When will the Personal Computer Explosion touch YOU?

Are you prepared for the explosive transformation? Right in your own home? Electronic mail. Personalized investment analysis. Foreign language tutorial. Home energy management. Robots. Computer music. Secretarial service. Diet and menu planning. And more, more, more.

onComputing™ the new McGraw-Hill quarterly, prepares you for the enormous changes coming during the 1980's (Some are already here). **onComputing™** explains in nontechnical language what personal computers are, how they work, and how you can use them at home, for fun and profit.

Don't let the personal computer explosion catch you off guard. Know what's happening and help make it happen! Prepare now for the exciting future with a subscription to **onComputing™**!

Call Toll-Free
800-258-5485

Start your subscription today.

onComputing™ Subscription Dept. P.O. Box 307, Martinsville, NJ 08836

DOMESTIC subscription rate:
☐ U.S. 1 yr. (4 issues) @ $8.50 ☐ Canada & Mexico, 1 yr. (4 issues) @ $10.00

FOREIGN (to expedite service, please remit in U.S. funds drawn on a U.S. bank.)
☐ Europe (and all other countries, except above), 1 yr. @ $12.00 — surface delivery.

☐ Bill Visa ☐ Bill Master Charge ☐ Bill me (North America only)

Card Number _____ Expiration _____

Signature _____ Name (please print) _____

Street/Apartment Number _____

City _____ State/Province/Country Code _____

Please allow 6-8 weeks for processing.

7BBO

© onComputing, Inc. 1980

good as the one we are considering in the current branch.

This procedure is easy to implement but not particularly easy to understand. The general idea was explained by an example by W D Maurer in an earlier issue of this magazine (see reference 2), and a detailed exposition is provided by Knuth and Moore (reference 1). For our purposes, the job is accomplished by a single statement:

```
750 IF V(L) < -V(L - 1) THEN 580
```

If the condition specified in line 750 is satisfied, then a cutoff is not called for, and the process branches to line 580, where the next move option is considered at this level. If the condition in line 750 is not satisfied, the process continues to line 760, which instructs the machine to back up one level in the tree:

```
760 L = L - 1: S = -S: PRINT@243 + 64 * L, Y$;:
    IF L > 1 THEN 680
```

The backup procedure includes decreasing the value of L by 1, changing the index that indicates which player has the move, erasing the move information printed on the right side of the video display, and branching to line 680 to execute the downdate instructions for the new value of L. If the value of L decreases to 1, all options at the base of the tree have been examined and the search is completed. In this case, the machine drops to line 800 and makes the move which has been stored by variable BM.

It is important to note that the jump to line 680 for downdating is followed by execution of the minimax test (line 700) for a new best move at the new value of L; sometimes the program proceeds again to line 750, where another cutoff may occur. Note, also, that line 760 can be entered from two different locations. In addition to dropping through from line 750, the machine can be directed to line 760 from line 580 as a result of exhausting all possible move options at a given level. The α-β test at line 750 provides a means for terminating the search at a node before all of the options have been analyzed.

The version of Treasure Search just completed is given in listing 1.

Listing 1: *Listing for the game of Treasure Search, written for the TRS-80 using Level II BASIC. This game, in its various versions, illustrates the usefulness of alpha-beta pruning when searching a tree for the best strategy in a two-player game. The game, as written here, plays an unmodified alpha-beta strategy against a human player. See listings 2 and 3 for additions that cause the computer to play more rapidly.*

```
100 CLEAR 100: CLS: DEFINT A-Z: RANDOM: SH = 0:
    ST = 0
110 PRINT@463, "PLEASE ENTER YOUR NAME";: INPUT N$
120 DIM A(8), B(99), D(4), E(12), M(12)
130 DIM PV(12,12), Q(12), V(12), Z(12)
140 D(1) = -10: D(2) = -1: D(3) = 1: D(4) = 10
150 A(1) = 10: A(2) = -10: A(4) = -1: A(8) = 1: CLS
160 PRINT@461, "TRS-80 PLAYING STRENGTH (1 TO 5)";:
    INPUT Y
170 DM = 2*Y: FOR I = 11 TO 88: B(I) = RND(9): NEXT I
180 FOR I = 0 TO 10: B(I) = 99: NEXT I: FOR I = 89 TO 99:
    B(I) = 99: NEXT I
190 FOR I = 19 TO 79 STEP 10: B(I) = 99: B(I + 1) = 99:
    NEXT I
220 CLS: FOR I = 11 TO 88: IF B(I) = 99 THEN 240
230 X$ = RIGHT$ (STR$ (B(I),1): GOSUB 1000
240 NEXT I: PRINT@22, "TREASURE SEARCH"; Y;
250 PRINT@256, N$;: PRINT@448, "TRS-80";:
    Y$ = STRING$ (12, " ")
260 T = 54: T$ = "*": H = 45: H$ = "X":
    Z$ = STRING$ (32, " ")
270 I = T: X$ = T$: GOSUB 1000: B(T) = 99: B(H) = 99
280 I = H: X$ = H$: GOSUB 1000: GOTO 300
290 PRINT@788, "ILLEGAL MOVE, TRY AGAIN";:
    FOR I = 1 TO 999: NEXT I
300 PRINT@788, Z$;: PRINT@788, "WHICH DIRECTION FOR
    X";
310 IF INKEY$ = "" THEN 310 ELSE R = PEEK(16444)
320 R = INT(R/8): J = H + A(R)
330 IF B(J) = 99 THEN 290 ELSE PRINT@788, Z$;
360 I = H: B(I) = 0: X$ = "-": GOSUB 1000: SH = SH + B(J)
370 H = J: B(H) = 99: I = H: X$ = H$: GOSUB 1000
380 PRINT@321, SH;: IF SH > 99 THEN 930
510 DT = DM
520 L = 1: SC = 0: S = -1
530 V(0) = -99: V(1) = -99: M(0) = T: M(1) = H
540 L = L + 1: Q(L) = 0: S = -S: V(L) = V(L - 2)
580 Q(L) = Q(L) + 1: IF Q(L) > 4 THEN 760
590 J = M(L - 2) + D(Q(L))
600 IF B(J) = 99 THEN 580 ELSE M(L) = J: E(L) = B(J)
610 B(J) = 99: B(M(L - 2)) = 0: SC = SC + S * E(L)
620 PRINT@179 + 64 * L, J; SC; V(L); " ";: IF L < DT THEN
    540
670 V(L + 1) = -S * SC
680 B(M(L)) = E(L): B(M(L - 2)) = 99: SC = SC - S * E(L)
700 IF V(L) < -V(L + 1) THEN V(L) = -V(L + 1) ELSE 580
740 IF L = 2 THEN BM = M(L): PRINT@180, BM; V(2);
750 IF V(L) < -V(L - 1) THEN 580
760 L = L - 1: S = -S: PRINT@243 + 64 * L, Y$;: IF L > 1
    THEN 680
800 I = T: B(I) = 0: X$ = "-": GOSUB 1000: PRINT@179, Y$;
810 T = BM: ST = ST + B(T): B(T) = 99: I = T: X$ = T$
820 GOSUB 1000: PRINT@513, ST;: IF ST < 100 THEN 300
910 PRINT@915, "THANK YOU FOR A PLEASANT GAME";
920 GOTO 920
930 PRINT@917, "CONGRATULATIONS, YOU WIN";:
    GOTO 920
1000 R = INT (I/10): C = I - 10 * R: K = 141 + (8 - R) * 64 +
     C * 4
1010 PRINT@K, X$;: RETURN
```


Traditional Techniques

This completes the α-β minimax module. You may be surprised that this algorithm can be presented in only a few lines of BASIC. The simplicity of the presentation is possible because we used the negamax procedure and because Treasure Search is a simple game. It is very straightforward in terms of move generation (line 590), move evaluation (line 600), and the ease of updating (line 610) and downdating (line 680) the internal representation of the playing field. This simplicity also means that the algorithm will execute fairly rapidly, and thus a search of nontrivial depth can be completed in a reasonable amount of time.

The algorithm that I have presented for the α-β minimax procedure is quite different from the one that appears in most textbooks. Traditionally, the algorithm generates all of the moves at each node and then orders them using a plausibility routine before proceeding to the next deeper level of the tree. This approach is based on

Listing 2: *To implement the killer heuristic, these lines are to be added to listing 1, replacing line 590 of listing 1 and inserting lines 550, 560, and 710.*


```
550 J = Z(L): I = 0
560 I = I + 1: IF J = M(L - 2) + D(I) THEN 600 ELSE IF I < 4
    THEN 560
590 J = M(L - 2) + D(Q(L)): IF J = Z(L) THEN 580
710 IF L > 2 THEN Z(L) = M(L)
```

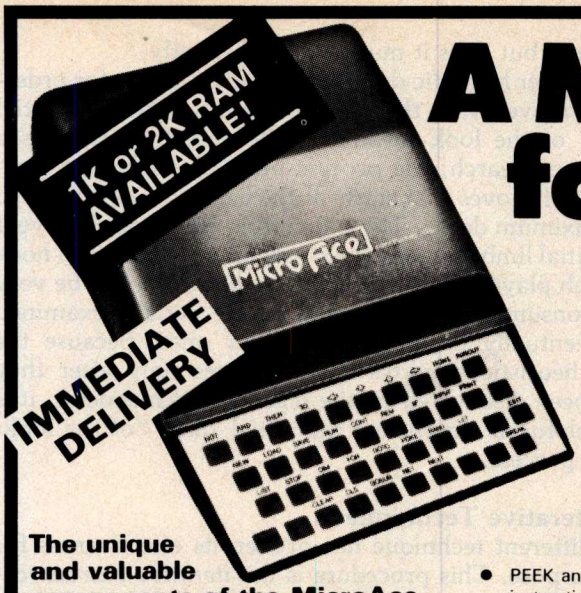

Licenced by Sinclair Research Ltd.

A Microcomputer for everyone at a Micro Price

The MicroAce - a new generation of miniature computers



A COMPLETE COMPUTER for $149.00 for 1K Kit

Post and Packing FREE

(Add 6% Tax for Shipments inside California)

The unique and valuable components of the MicroAce

The MicroAce is not just another personal computer. Quite apart from its exceptionally low price, the MicroAce has two uniquely advanced components: the powerful BASIC interpreter, and the simple teach yourself BASIC manual.

The unique versatile BASIC interpreter offers remarkable programming advantages:

- **Unique 'one-touch' key word entry: the MicroAce eliminates a great deal of tiresome typing. Key words (RUN, PRINT, LIST, etc.) have their own single-key entry.**
- Unique syntax check. Only lines with correct syntax are accepted into programs. A cursor identifies errors immediately. This prevents entry of long and complicated programs with faults only discovered when you try to run them.
- Excellent string-handling capability — takes up to 26 string variables of any length. All strings can undergo all relational tests (e.g. comparison). The MicroAce also has string input — to request a line of text when necessary. Strings do not need to be dimensioned.
- Up to 26 single dimension arrays.
- FOR/NEXT loops nested up 26.
- Variable names of any length.
- BASIC language also handles full Boolean arithmetic, conditional expressions, etc.
- Exceptionally powerful edit facilities, allows modification of existing program lines.
- Randomise function, useful for games and secret codes, as well as more serious applications
- Timer under program control.
- PEEK and POKE enable entry of machine code instructions, USR causes jump to a user's machine language sub-routine.
- High-resolution graphics with 22 standard graphic symbols.
- All characters printable in reverse under program control.
- Lines of unlimited length.

'Excellent value' indeed!

For just $149.00 (excluding handling charge) you get everything you need to build a personal computer at home... PCB, with IC sockets for all ICs; case; leads for direct connection to a cassette recorder and television (black and white or color); everything!

Yet the MicroAce really is a complete, powerful, full-facility computer, matching or surpassing other personal computers at several times the price.

The MicroAce is programmed in BASIC, and you can use it to do quite literally anything, from playing chess to managing a business.

The MicroAce is pleasantly straightforward to assemble, using a fine-tipped soldering iron. It immediately proves what a good job you've done: connect it to your TV ... link it to the mains adaptor ... and you're ready to go.

Fewer chips, compact design, volume production-more power per Dollar!

The MicroAce owes its remarkable low price to its remarkable design: the whole system is packed on to fewer, newer, more powerful and advanced LSI chips. A single SUPER ROM, for instance, contains the BASIC interpreter, the character set, operating system, and monitor. And the MicroAce 1K byte RAM (expandable to 2K on board) is roughly equivalent to 4K bytes in a conventional computer — typically storing 100 lines of BASIC. (Key words occupy only a single byte.)

The display shows 32 characters by 24 lines.

And Benchmark tests show that the MicroAce is faster than all other personal computers.

No other personal computer offers this unique combination of high capability and low price.


The MicroAce teach-yourself BASIC manual.

If the features of the BASIC interpreter mean little to you-don't worry. They're all explained in the specially-written book *free* with every kit! The book makes learning easy, exciting and enjoyable, and represents a complete course in BASIC programming-from first principles to complex programs. (Available separately-purchase price refunded if you buy a MicroAce later.)

A hardware manual is also included with every kit.

The MicroAce Kit: $149.00 with IK COMPLETE $169.00 with 2K

Demand for the MicroAce is very high: use the coupon to order today for the earliest possible delivery. All orders will be despatched in strict rotation. If you are unsuccessful in constructing your kit, we will repair it for a fee of $20.00, post and packing FREE. Of course, you may return your MicroAce as received within 14 days for a full refund. We want you to be satisfied beyond all doubt — and we have no doubt that you will be.

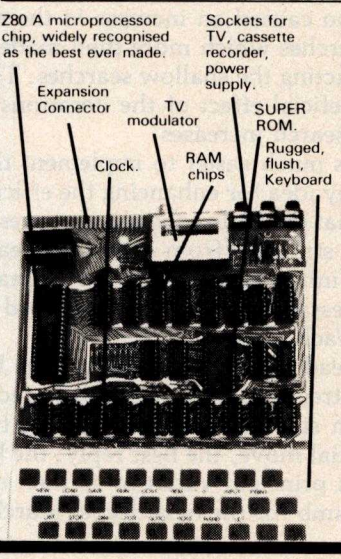

Your MicroAce kit contains...

- Printed circuit board, with IC sockets for all ICs.
- Complete components set, including all ICs-all manufactured by selected world-leading suppliers.
- New rugged keyboard, touch-sensitive, wipe-clean.
- Ready-moulded case.
- Leads and plugs for connection to domestic TV and cassette recorder. (Programs can be SAVEd and LOADed on to a portable cassette recorder.)
- Mains adaptor of 600 mA at 9VDC nominal unregulated.
- FREE course in BASIC programming and user manual.

JOIN THE REVOLUTION - DON'T GET LEFT BEHIND - ORDER YOUR MICRO ACE NOW!!

Send Check, Money Order or quote your Credit Card No. to:
MicroAce 1348 East Edinger, Santa Ana, California, Zip Code 92705.
or phone (714) 547 2526 quoting your Credit Card Number.

Quantity	Description	Unit Price	TOTAL
	MicroAce Kit 1K	$149.00	
	MicroAce Kit 2K	$169.00	
	Manual	$10.00	
	1K Upgrade Kit	$29.00	
Shipments inside California add 6% TAX		**TOTAL**	

☐ Amex.
☐ Diners
☐ Check
☐ Money Order
☐ Master Charge
☐ Visa

Card No. _____

Exp. Date _____

Name _____

Address _____

City _____ State _____ Zip _____

Circle 166 on inquiry card.

the well-known finding that the efficiency of the α-β method is increased greatly when the strongest moves for each player are examined first at each level of the tree. The disadvantage of generating, ordering, and storing all of the moves at each level is that most of them will never be examined if an α-β cutoff occurs. If a cutoff can be produced by some other means, a great deal of time and memory can be saved by ignoring most of the moves at each node and omitting the ordering process.

The obvious question is, of course, how can we have our cake and eat it too? The competition among chess programmers over the last decade has led to some useful discoveries that are relevant to this problem. We will consider two of these discoveries that are especially effective in increasing the efficiency of the α-β minimax procedure. The first is the *killer heuristic* and the second is the *iterative search.*

The Killer Heuristic

The killer heuristic is a simple, yet powerful, idea that greatly improves move ordering. Instead of trying to order moves on the basis of a special plausibility analysis, the killer procedure simply remembers moves that were effective in the past. That is, information generated as a byproduct of the regular tree search is remembered; and it is applied later on in the search when a similar situation is encountered. In our implementation, we will remember the move that was judged most recently to be the best by the minimax rule at each level of the tree; each time we visit a new node in the tree, this move will be tried first.

To implement this idea, a few additions and modifications are necessary (see listing 2). When the tree search moves to a higher level, the first move examined should be the killer for that level (lines 550 and 560 of listing 2).

First, the appropriate move is read from the Z array, then a check is made to make sure the move is legal. If the killer does not produce an immediate cutoff, the search process will revert back to the normal procedure of examining each of the possible options. This process is controlled at lines 580 and 590.

We need to modify line 590 of listing 1 to make sure that a move is not examined twice (first as the killer and then as a regular option).

The final step in implementing the killer heuristic is to provide a means for remembering the move which is currently most effective in terms of the minimax strategy at each level of the look-ahead tree. This is accomplished by recording the current move each time the search process finds that it is the best one so far; this is done at line 700 of listing 1.

If the process is at the base of the tree (L = 2), then the move need not be recorded since the killer strategy does not apply at this level. It is too late to define a move that should be searched first at the base of the tree. By not altering the killer at L = 2, we make sure that the move examined initially will be searched only once even if it turns out not to be the one eventually chosen.

The killer heuristic is a very powerful addition to the α-β minimax algorithm. It requires only a small change in the algorithm, involves a negligible amount of time in terms of code execution, and often results in a decrease of 50% or more in the number of nodes actually visited in the search tree. At the deeper levels of the tree, it accomplishes essentially the same function as plausibility ordering, but does it much more efficiently.

The killer heuristic does not provide a means for ordering the moves when the machine is constructing the initial "limb" of the look-ahead tree. Because the search is a depth-first search, the process begins by selecting a sequence of moves that starts at the base node and goes to the maximum depth. The α-β cutoffs are most effective if this initial limb contains the strongest moves at each node for each player. This first stage of the search can be very time-consuming if the moves that are initially examined are eventually discarded for better ones. Because the killer heuristic employs strong moves only after they have been discovered by the regular search process, it is not helpful in structuring the initial "limb" of the look-ahead process.

The Iterative Technique

A different technique has proven its effectiveness for this purpose. This procedure is the *iterative tree search.* Its effectiveness for increasing the efficiency of the α-β minimax procedure was discovered serendipitously. At Northwestern University, for example, the Slate-Atkin chess-programming team was concerned about time control in move selection. Occasionally, in a complex position, their chess program would conduct its regular look-ahead search and would not complete the task in the amount of time anticipated. In several instances, the search would require four to five times as long as anticipated. This was a serious problem because chess tournaments are conducted under strict time allowances. If a program takes too much time for move selection during the early stages of the game, very little time will be available when it is needed during the latter part of the contest.

To cope with this problem, Slate and Atkin implemented an iterative procedure whereby the search is conducted in stages. At first, a complete two-ply search is conducted, then a three-ply search, then a four-ply search, etc, until a search of the desired depth is reached. The advantage of this procedure for time control is that a search can be aborted at any time and the machine can fall back upon the move selected by the immediately preceding search of one less ply in depth. It is possible to use information gained in the early, shallow searches to help structure (ie: order) the deeper searches.


Interestingly enough, Slate and Atkin discovered that this ordering information caused an increase in the efficiency of the deeper searches which more than made up for the time spent conducting the shallow searches. They also found that the beneficial effect of the iterations increases as the depth of search increases.

The iterative search is much easier to implement than you might think. The key idea for enhancing the efficiency of the α-β search is that the best sequence of moves (as judged by the minimax strategy) from a shallow search can be used to order the initial moves in the deeper search which follows. It is necessary to develop and record the *principal variation* for each of the searches.

This means that, instead of remembering just the best move at the base of the tree, the machine needs to record the best moves for each side at every level of the tree. Thus, it predicts the initial move, the best reply, the best counter-reply, etc. This principal variation is then used for selecting the initial limb for the next deeper search in

A New Book From BYTE Books

Threaded Interpretive Languages

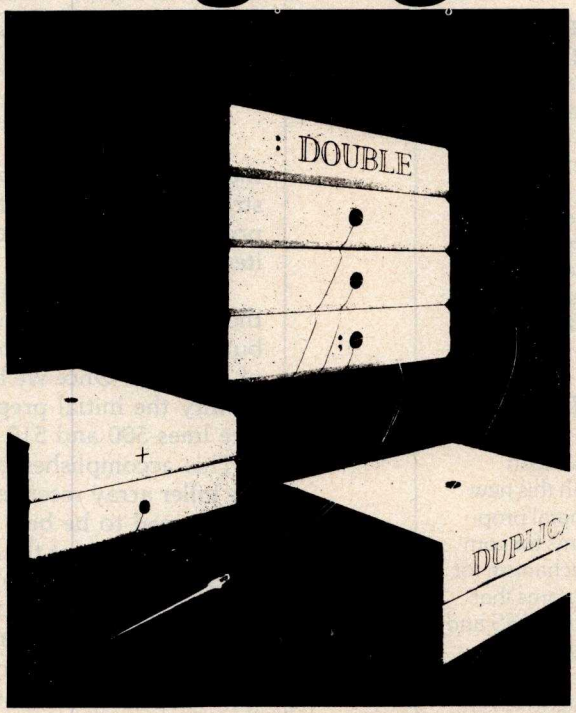

R. G. Loeliger

Threaded languages (such as FORTH) are an exciting new class of languages. They are compact and fast, giving the speed of assembly language with the programming ease of BASIC, and combine features found in no other programming languages. An increasing number of people are using them, but few know much about how they work. Is a threaded language interpreted or compiled? How much memory overhead does it require? Just what is an "inner interpreter?" **Threaded Interpretive Languages,** by R. G. Loeliger, concentrates on the development of an interactive, extensible language with specific routines for the ZILOG Z80 microprocessor. With the core interpreter, assembler, and data type defining words covered in the text, it is possible to design and implement programs for almost any application imaginable. Since the language itself is highly segmented into very short routines, it is easy to design equivalent routines for different processors and produce an equivalent threaded interpretive language for other development systems. If you are interested in learning how to write better FORTH programs or you want to design your own powerful, but low-cost, threaded language specific to your needs, this book is for you.

This and other BYTE/McGraw-Hill books are available from BYTE Books or your local computer store.

B11

ISBN 0-07-038360-X
Price $18.95

Please send _____ copies of **Threaded Interpretive Languages**

Name Title Company

Street City State/Province Code

☐ **Check enclosed in the amount of $**_____
☐ **Bill Visa** ☐ **Bill Master Charge**
Card No. _____
Exp. Date _____
Add 75¢ per book to cover postage and handling.
Please remit in U.S. funds or draw on a U.S. Bank.

BYTE BOOKS
70 Main St.
Peterborough, NH 03458

Circle 167 on inquiry card.

HAYDEN TALKS SYSTEMS...

New!

MICROPROCESSOR SOFTWARE DESIGN

(ed. Schindler) A *must* for systems designers and software engineers! This edited compilation of articles from Electronic Design magazine covers the full spectrum of applications software. Includes discussions from top-down design through operating system specifications featuring languages such as BASIC and PASCAL. *#5190-5, $13.25.*

New!

DIGITAL COMPUTER SIMULATION

(Maryanski) System simulation studies are simplified with this new book! Text discusses general properties of significant systems for computer simulation, the mechanism for the development of programs that simulate discrete systems, GPSS and Simscript, CSMP, the System Dynamics approach to continuous simulation, and disciplines in which simulation modes are applied, *#5118-2, $15.95.*

THE 8086 PRIMER: An Introduction to its Architecture, System Design and Programming

(Morse) Written by the man responsible for the architectural definition of the 8086 processor. Reviews processors in general and discusses the 8086 in detail — including information never before published. Also covers motivation for the design of the 8086 chip, corrected procedures, and internal architecture. *#5165-4, $9.95.*

Available at your local computer store!

Write to:

Hayden Book Company, Inc.
50 Essex Street
Rochelle Park, NJ 07662

or **Call Toll Free,** 24 hours a day, **(1-800-827-3777, ext. 302)***
TO CHARGE YOUR ORDER TO Master charge or Visa!
Minimum order is $10.00;
Customer pays postage and handling.
From Missouri, call
1-800-892-7655, ext. 302.

Listing 3: *Additions to listing 1 to implement an iterative tree search algorithm. These lines are to be added to the combination of listings 1 and 2.*

```
500 FOR I = 4 TO DM: Z(I - 2) = PV(2,I): NEXT I
510 IF PV(2,3) = H THEN DT = DM ELSE DT = 2
720 I = L: PV(L,I) = M(L): IF L = DT THEN 740
730 I = I + 1: PV(L,I) = PV(L + 1,I): IF I < DT THEN 730
780 IF DT = DM THEN 800
790 FOR I = 2 TO DT: Z(I) = PV(2,I): NEXT I: DT = DT + 2:
    GOTO 520
```

the iteration. In our present algorithm, we employ this strategy by placing the principal variation from the previous search in the killer array at the start of each iteration.

The first requirement is the development and storage of the principal variation. This is fairly difficult to explain but not very difficult to implement (see lines 720 and 730 of listing 3). Once we have a principal variation, we then modify the initial preparation for the look-ahead search (see lines 500 and 510 of listing 3).

This accomplishes two important things. At line 500, the killer array receives the moves for each side that were ascertained to be best on the move calculation from the previous turn (not the previous iteration of this turn, but rather the last time the machine made a move). The index I-2 is used because the first two moves anticipated by that variation (one for the machine and one for the opponent) have already been played.

Line 510 checks to see if the opponent actually made the anticipated move. If so, an iterative search is unnecessary since the principal variation from the previous move calculation provides the same ordering information as would be obtained by the iterations. The search depth, DT, is therefore set to the maximum depth, DM. If the opponent does not make the anticipated move, an iterative search is required and therefore the search depth, DT, is set at the minimum value. Note that DT = 2 calls for a one-ply search.

When a search has been completed, it is necessary to determine if the maximum depth has been reached or whether another iteration is required. If the latter case holds true, the principal variation from the most recent iteration is stored in the killer array and the search depth is increased. In our present implementation, each iteration is two plies deeper than its predecessor. Lines 780 and 790 of listing 3 accomplish this task.


Analysis of Modifications


With these additions, the program will select a move in the Treasure Search game by using an iterative α-β minimax procedure enhanced by the killer heuristic. To demonstrate the power of this modified algorithm, I have made some sample runs which count the number of nodes visited in the look-ahead tree in an actual game with and without the various modifications. These results are very informative.

The program was examined in four variations: minimax, α-β minimax, α-β minimax with the killer heuristic, and iterative α-β minimax with the killer heuristic. The version involving the minimax strategy without α-β is produced simply by replacing line 750 with:

```
750 GOTO 580
```

Make Your Dreams Come True

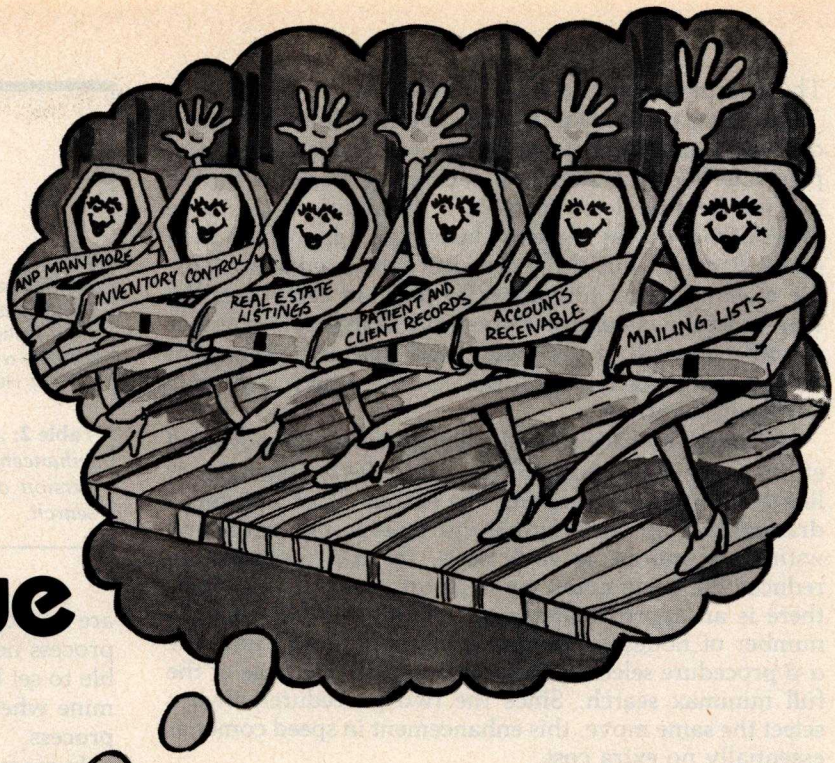

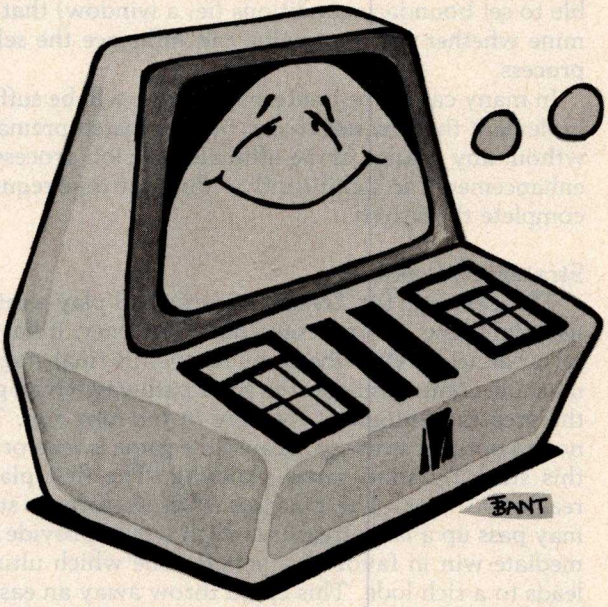

Imagine sitting down at your computer system and developing that specialized application you've always dreamed about — with absolutely **no programming!**

Now you can with **PRISM™** — the first Data Base Management System that provides the Total Solution to your information management needs. With **PRISM™**, you can have your application up and running in a matter of minutes — not months.

PRISM's flexibility and ease of use are combined with its full spectrum of features and capabilities to make it the ideal DBMS for a wide range of business applications. Mailing Lists, Patient Records, Real Estate Listings, and Client Billings are just a few of the possibilities. And **PRISM™** provides the quality, performance, and affordability you have come to expect from MAG software products.

To find out how **your** dreams can become realities, see your **PRISM™** dealer today.
Micro Applications Group, 7300 Caldus Avenue, Van Nuys, California 91406, (213) 881-8076.

PRISM™

"The Total Solution" MAG

PRISM requires CP/M and CBASIC. (CP/M is a registered trademark of Digital Research. CBASIC is a trademark of Complier Systems.)

© MAG 1980

Circle 168 on inquiry card.

This eliminates all of the α-β cutoffs.

To insure comparability of our results, an initial game configuration (digit assignment) was constructed and placed in an array such that each game started with the playing field depicted in table 1. In addition, the same series of moves was made by the human opponent in each game. Each version of the program calculated a move for the machine's first four times to play. In each case, the search depth was set for a seven-ply search. The number of nodes in each of the look-ahead trees is presented in table 2. The node count for the iterative search is the sum across all iterations.

An analysis of these results demonstrates the powerful effect of the α-β procedure. By using the IF statement at line 750 in the α-β versions, the search effort is reduced dramatically. In our example with a seven-ply search and with four options at each node, the α-β modification reduces the node count by a factor of about 10. Since there is an approximate linear relationship between the number of nodes in the tree and computation time, the α-β procedure selects a move in one-tenth the time of the full minimax search. Since the two procedures always select the same move, this enhancement in speed comes at essentially no extra cost.

The results in table 2 indicate that the killer heuristic is also a powerful addition to the α-β algorithm. In our example, the node count was reduced by 30% to 50% by simply remembering moves that had proved themselves effective at an earlier stage in the search.

This modification also provides substantial benefits at minimal extra cost in terms of processing time and memory requirement. The empirical analysis presented in table 2 also demonstrates the beneficial effects of the iterative procedure. The number of nodes generated in the calculation for the first move was reduced by almost 25% despite the fact that searches of one ply, three plies, and five plies were conducted prior to the seven-ply search.

In the calculations for moves 2, 3, and 4, the prior principal variation correctly predicted the human's move so that the machine dispensed with the iterations because it already had the ordering information they would have produced. The results presented in table 2 clearly indicate that the iterative procedure enhances the efficiency of the search process.

Improvements

A comparison of the full minimax procedure as it was employed in the early 1950s with the modern, enhanced α-β procedure indicates a truly dramatic increase in search efficiency. The full minimax procedure averaged approximately 17,000 nodes for the first four move calculations. The modern algorithm as presented in this article averaged approximately 600 nodes for these same four calculations. This difference is large enough to convert an impractical but elegant idea into a powerful programming tool. I should also point out that the effectiveness of these procedures would be even more notable if we had examined a game like chess with more than thirty options at each node instead of a simple game with only four options at each node.

There is an additional way to increase the efficiency of the α-β search. In the present program, the evaluations of the terminal positions are based on a cumulative process in which the treasures collected at each node in the tree are added or subtracted to a running total. As the search process nears the maximum depth of the tree, it is possible to set boundary conditions (ie: a window) that determine whether the final value can influence the selection process.

In many cases, the nonterminal score will be sufficiently deviant that the search can be terminated prematurely wthout any change in the ultimate decision process. This enhancement can significantly reduce the time required to complete the search.

	Number of Nodes in the Look-ahead Tree			
	First Move	Second Move	Third Move	Fourth Move
Minimax	13157	18456	20029	17609
α-β Minimax	1965	1650	1641	1794
α-β Minimax with Killer Heuristic	969	1023	926	830
Iterative α-β Minimax with Killer Heuristic	753	571	675	363

Table 2: *An empirical analysis of the minimax algorithm and enhancements as applied to the Treasure Search game. Each version of the program conducted a seven-ply look-ahead search.*

Strategic Weakness

This program for Treasure Search will play a fairly intelligent game. As presented here, however, it has a major weakness. When the game reaches its final stages, the machine continues to search for a pathway which gives it the greatest amount of treasure *in the long run.* This is not an optimal strategy because the game is won or lost at this stage by short-range planning. The first player to reach 100 wins. The machine with its present strategy may pass up a large treasure which would provide an immediate win in favor of a smaller one which ultimately leads to a rich lode. This could throw away an easy win.

Serious players may wish to introduce a special set of instructions for the endgame to correct for this weakness. The machine's game can also be strengthened by converting the program to assembly language. The deeper the look-ahead search, the greater the apparent intelligence of the machine. Conversion to assembly language will permit the program to search six plies deeper without increasing move-selecting time.

This article should provide useful information to anyone who wishes to write a game program which employs the α-β minimax procedure. ■

References

1. Knuth, D E, and R W Moore, "An Analysis of Alpha-Beta Pruning," *Artificial Intelligence*, 1975, Volume 6, pages 293 thru 326.
2. Maurer, W D "Alpha-Beta Pruning," November 1979 BYTE, pages 84 thru 96.
3. Slagle, J R, and J K Dixon, "Experiments with Some Programs That Search Game Trees," *Journal of the Association for Computing Machinery*, 1969, Volume 16, pages 189 thru 207.
4. Von Neumann, J, and O Morgenstern, *Theory of Games and Economic Behavior.* Princeton NJ, Princeton University Press, 1944.

CP/M* compatible software

SYSTEM MAINTENANCE

DIAGNOSTICS I: Easily the most comprehensive set of CP/M compatible system check-out programs ever assembled. Finds hardware errors in your system, confirms suspicions, or just gives your system a clean bill of health. Tests:

- Memory
- CPU (8080/8085/Z80)
- Terminal
- Disk
- Printer

To our knowledge the CPU test is the first of its kind anywhere. Diagnostics I can help you find problems before they become serious. A good set of diagnostic routines are a must in any program library.

Minimal requirements: 24K CP/M. Supplied with complete user manual: $60.00 Manual alone: $15.00.

ACCOUNTING

ACCOUNTS PAYABLE/RECEIVABLE: A complete, user oriented package which features:

automatic postings to general ledger (optional)

accounts payable:
- check printing with invoice
- invoice aging

accounts receivable:
- progress billing
- customer statements
- partial invoice payments
- invoice aging

The entire package is menu driven and easy to learn and use. It incorporates error checking and excellent user displays. This package can be used stand alone or with the General Ledger below.

Supplied with extensive user manual: $200.00. Manual alone: $20.00.

GENERAL LEDGER: A complete, user oriented package which features:

- Accepts postings from external programs (i.e. AP/AR above)
- Accepts directly entered postings
- Maintains account balances for current month, quarter, and year and previous three quarters
- Financial reports: trial balance, income statement balance sheet, and more.

Completely menu driven and easy to learn and use. Excellent displays and error checking for trouble free operation. Can be used stand alone or with Accounts Payable/Receivable above.

Supplied with extensive user manual: $200.00. Manual alone: $20.00.

Both require 48K CP/M, terminal with cursor positioning, home and clear home, one 8" disk or Two 5" disks. CBASIC2 required.

TEXT PROCESSING

TFS—Text Formatting System: An extremely powerful formatter. More than 50 commands. **Supports all major features including:**

- left & right margin justification
- user defined macros
- dynamic insertion from disk file
- underlining and backspace

TFS lets you make multiple copies of any text. For example: Personalized form letters complete with name & address & other insertions from a disk file. Text is not limited to the size of RAM making TFS perfect for reports or any big job.

Text is entered using CP/M standard editor or most any CP/M compatible editor. TFS will link completely with Super-M-List making personalized form letters easy.

Requires: 24K CP/M.

Supplied with extensive user manual: $85.00. Manual alone: $20.00.

Source to TFS in 8080 assembler (can be assembled using standard CP/M assembler) plus user manual: $250.00.

MAILING LIST

SUPER-M-LIST: A complete, easy to use mailing list program package. Allows for two names, two address, city, state, zip and a three digit code field for added flexibility. Super-M-List can sort on any field and produce mailing labels direct to printer or disk file for later printing or use by other programs. Super-M-List is the perfect companion to TFS. **Handles 1981 Zip Codes!**

Requires: **48K** CP/M.

Supplied with complete user manual: $75.00. Manual alone: $10.00

UTILITIES

Utility pack #1: A collection of programs that you will find useful and maybe even necessary in your daily work (we did!). Includes:

CMP: Compare two files for equality.

ARCHIVER: Compacts many files into one. useful when you run out of directory entries.

SORT: In core sort of variable length records.

XDIR: Extended. alphabetical directory listing with groupings by common extension.

PRINT: Formatted listings to printer.

PG: Lists files to CRT a page at a time.

. . . plus more . . .

Requires: 24K CP/M.

Supplied with instructions on discette: $50.00

PROGRAMMING LANGUAGES

FORTH: a full, extended FORTH interpreter/compiler produces COMPACT, ROMABLE code. As fast as compiled FORTRAN, as easy to use as interactive BASIC.

SELF COMPILING: Includes every line of source code necessary to recompile itself.
EXTENSIBLE: Adds functions at will.
Z80 & 8080 ASSEMBLERS included
Single license, OEM licensing available
Please specify CPU type: Z80 or 8080
Supplied with extensive user manual and tutorial: $150.00
Documentation alone: $25.00

ENHANCED 'TINY' PASCAL: We still call it 'Tiny' but it's bigger and better than ever! This is the Famous Chung/Yuen 'Tiny' Pascal with more features added. Features include:

- recursive procedures/functions
- integer arithmetic
- CASE
- FOR (loop)
- sequential disk I/O
- one dimensional arrays
- IF . . . THEN . . . ELSE
- WHILE
- 'PEAK' & 'POKE'
- READ & WRITE
- REPEAT . . . UNTIL
- more

'Tiny' Pascal is fast. Programs execute up to ten times faster than similar BASIC programs.

SOURCE TOO! We still distribute source, in 'Tiny' Pascal, on each discette sold. You can even recompile the compiler, add features or just gain insight into compiler construction.

'Tiny' Pascal is perfect for writing text processors, real time control systems, virtually any application which requires high speed. Requires: 36K CP/M. Supplied with complete user manual and source on discette: $85.00.

Manual alone: $10.00.

SOFTWARE SECURITY

ENCODE/DECODE: A complete software security system for CP/M. Encode/Decode is a sophisticated coding program package which transforms data stored on disk into coded text which is completely unrecognizable. Encode/Decode supports multiple security levels and passwords. A user defined combination (One billion possible) is used to code and decode a file. Uses are unlimited. Below are a few examples:

- data bases
- general ledger
- inventory
- payroll files
- correspondence
- accounts pay/rec
- programs
- tax records
- mailing lists

Encode/Decode is available in two versions:

Encode/Decode I provides a level of security suitable for normal use. Encode/Decode II provides enhanced security for the most demanding needs. Both versions come supplied on discette and with a complete user manual.

Encode/Decode I: $50.00
Encode/Decode II: $100.00 Manual alone: $15.00

INTERCOMPUTER COMMUNICATIONS

TERM: a complete intercommunications package for linking your computer to other computers. Link either to other CP/M computers or to large timesharing systems. TERM is comparable to other systems but costs less, delivers more and source is provided on discette!

With TERM you can send and receive ASCII and Hex files (COM too, with included convertion program) with any other CP/M computer which has TERM or compatible package. Allows real time communication between users on separate systems as well as acting as timesharing terminal.

- Engage/disengage printer
- error checking and auto retry
- terminal mode for timesharing between systems
- conversational mode
- send files
- receive files

Requires: 32K CP/M.
Supplied with user manual and 8080 source code: $110.00
Manual alone: $15.00.

CP/M Formats: 8" soft sectored, 5" Northstar, 5" Micropolis Mod II, Vector MZ

All Orders and General Information:
SUPERSOFT ASSOCIATES
P.O. BOX 1628
CHAMPAIGN, IL 61820
(217) 359-2112
Technical Hot Line: (217) 359-2691
(answered only when technician is available)

VISA

master charge

SuperSoft
First in Software Technology

*CP/M REGISTERED TRADEMARK DIGITAL RESEARCH

Circle 169 on inquiry card.

Ask BYTE

Conducted by Steve Ciarcia

The Automatic Apartment

Dear Steve,

I would like to congratulate you on your remote-control article using the BSR X-10 ("Computerize a Home," January 1980 BYTE, page 28). I have built a unit, and it is now so much a part of my life that I take it for granted. It wakes me up, controls the lights, and guards the apartment in conjunction with a simple burgler alarm.

I have envisioned a system of lighting control that would illuminate any room that I enter, while darkening the one I just left. For this system to work, it must keep track of the number of people in the apartment (if there are more than one), and it must be able to sense their motion from room to room. Thus, if one person is in the living room, and he goes to the kitchen, the kitchen light should come on, while the living room light should go off. If there were more than one person in the living room, the light should remain on until the last person has left. Of course, manual control should be available, and the system should be able to recognize any sensing errors it may make, and reset itself accordingly.

Obviously, I need a doorway sensor that will detect a person passing through, and also detect the direction he is going. Would you suggest ultrasonic sensors, or would infrared optical sensors be more practical? Could you provide some circuit ideas to help me along?

Jim Porter

I am always glad to hear from someone who takes computer control seriously. Having a computer and automating your apartment makes being "gadget happy" sound almost respectable. In any case, I am familiar with your problem, and I'll try to offer a few circuits that might help.

When I first got involved with security systems, I did a lot of investigation on motion detectors, ultrasonics, and infrared systems. Very few companies offer automatic systems that count people and control lights in rooms. This should give you some indication of what you are getting yourself into.

Two possible methods that come to mind are detecting the motion of people within a room or counting them as they enter and exit.

Motion detectors usually incorporate one of three techniques: infrared, ultrasonic, and microwave. The infrared types are the cheapest. They rely upon changes in ambient light,

Text continued on page 270

In "Ask BYTE," Steve Ciarcia answers questions on any area of microcomputing. The most representative questions received each month will be answered and published. Do you have a nagging problem? Send your inquiry to:

Ask BYTE
c/o Steve Ciarcia
POB 582
Glastonbury CT 06033

If you are a subscriber to The Source, send your questions by electronic mail or chat with Steve (TCE317) directly. Due to the high volume of inquiries, personal replies cannot be given. Be sure to include "Ask BYTE" in the address.

MARYMAC INDUSTRIES, INC.

To Place An Order
1-800-231-3680

Radio Shack®

Questions & Answers
Texas 1-713-392-0747

AUTHORIZED SALES CENTER


BRAND NEW IN CARTONS DELIVERED. Marymac Industries owns & operates Radio Shack© dealership in Katy, Texas. Warranties will be honored by all company owned Radio Shack© stores, & participating franchisees and dealer authorized sales centers. Save State Sales Tax. Texas Residents Add Only 5% Sales Tax. Open Mon.-Sat. 10-7. We pay freight and insurance. No extra charge for Master Charge & Visa. Call us for reference in or near your city. Ref: Katy National Bank, Katy, Texas. Radio Shack® Authorized Sales Center, 21969 Katy Fwy, Katy, Houston Texas 77450.

WE OFFER ON REQUEST

- Federal Express ☑
- Houston Intercontinental Airport Delivery ☑
- U.P.S. BLUE ☑
- References from people who have bought computers from us probably in your city ☑

ED McMANUS

MasterCard



In stock TRS-80 Model I & II
Taking orders for Model III

Where Your Dollar Means More

Save 10% 15% OR MORE

Radio Shack DEALER

WE ALWAYS OFFER

- ☑ NO extra charge for Master Charge or Visa
- ☑ We always pay the freight and insurance
- ☑ Toll free order number
- ☑ Our capability to go to the giant Tandy Computer warehouse 5 hours away, in Ft. Worth, Texas, to keep *you* in stock.


JOE McMANUS

VISA

Circle 60 on inquiry card.

Now Graphics
for your computer

$680

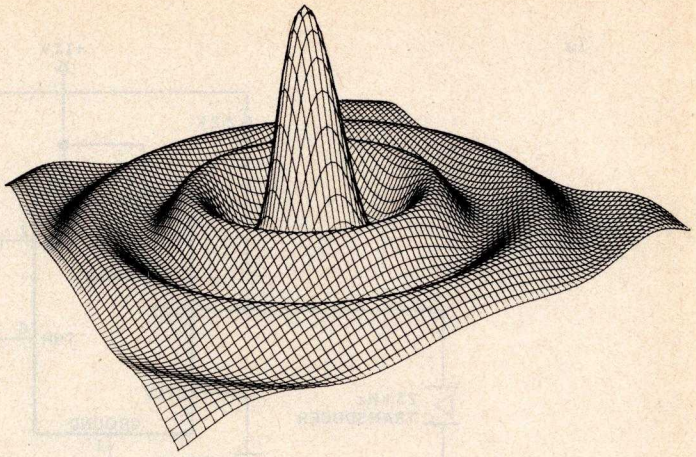


Expand your computer's capabilities with this easy-to-use drum plotter.
The Strobe Model 100 interfaces to any computer to generate professional quality graphics.

OFFERING High Resolution Graphics Output * Outstanding Performance * Assembler Coded Drivers for High Speed Plotting * Precise Operator Controls * Interactive Coordinate Input

ALSO AVAILABLE Hardware Interfaces for – TRS-80 · APPLE II · PET · S-100.
Applications Software Package providing vector plotting and variable size alphanumerics for: TRS-80 Level II BASIC, Applesoft BASIC, Northstar BASIC, CBASIC, Microsoft BASIC & FORTRAN.

*TRS-80, APPLE II, and PET are trademarks of Tandy Corp., Apple Computer Co., and Commodore Business Machines, respectively.


Circle 170 on inquiry card.

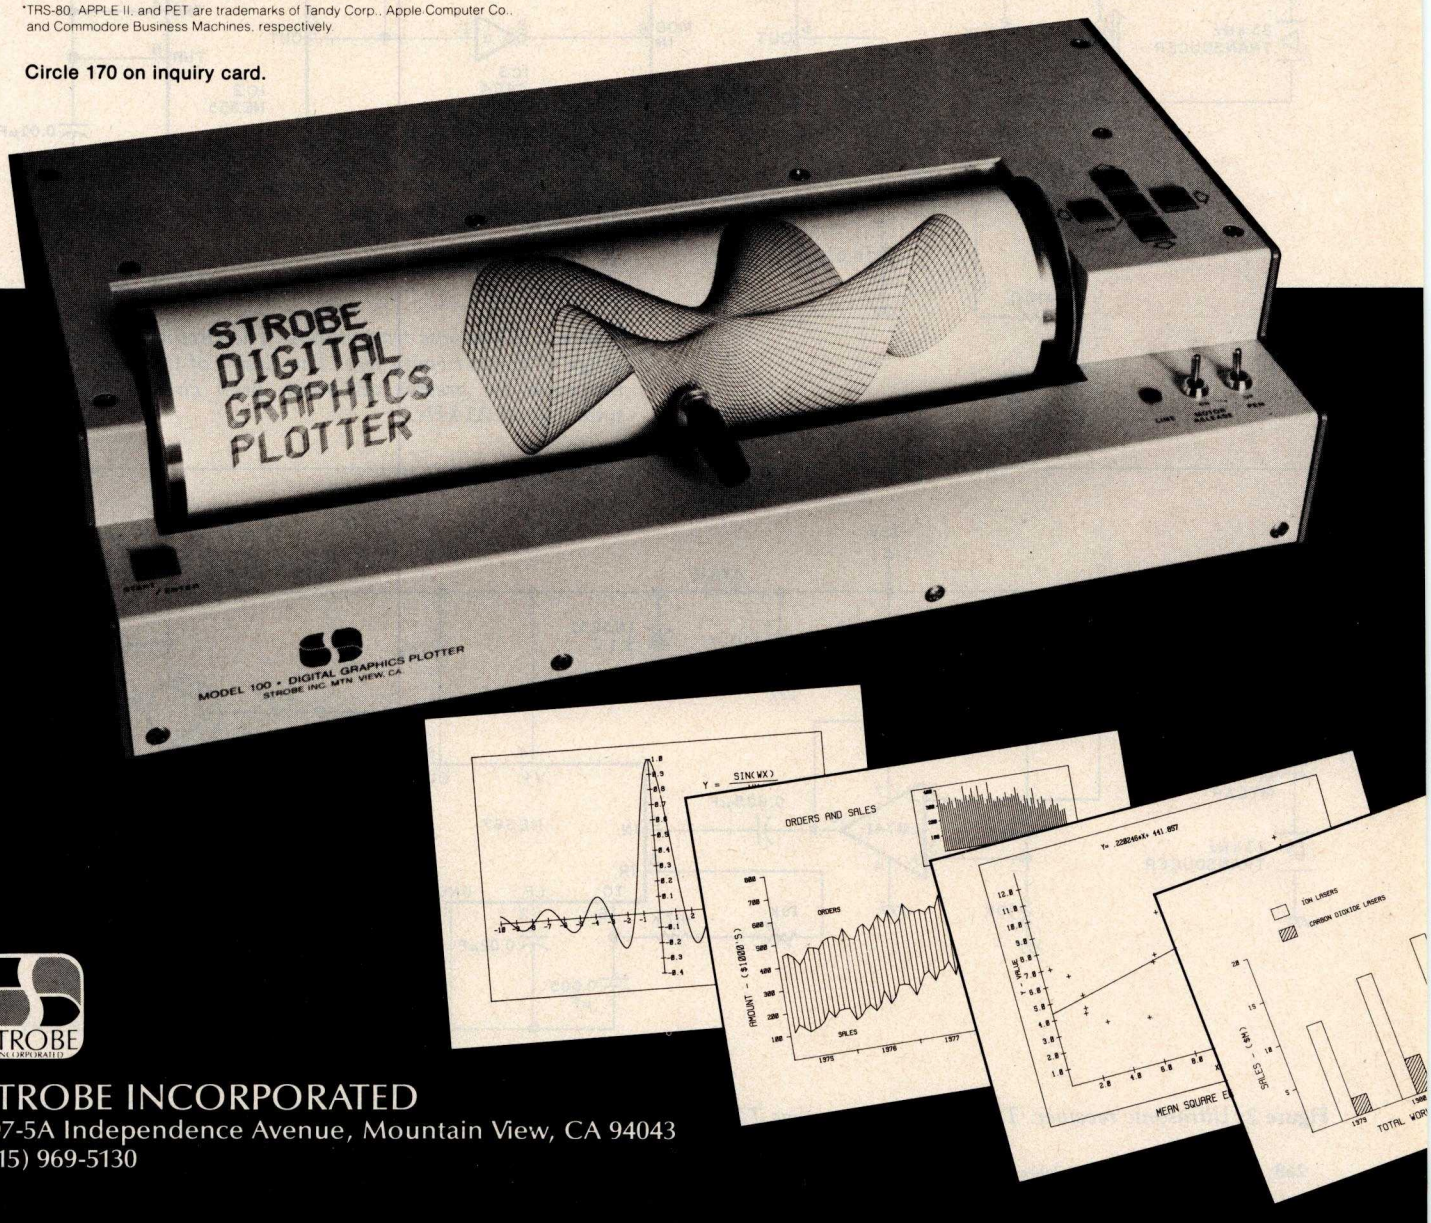

STROBE
INCORPORATED

STROBE INCORPORATED
897-5A Independence Avenue, Mountain View, CA 94043
(415) 969-5130

1a

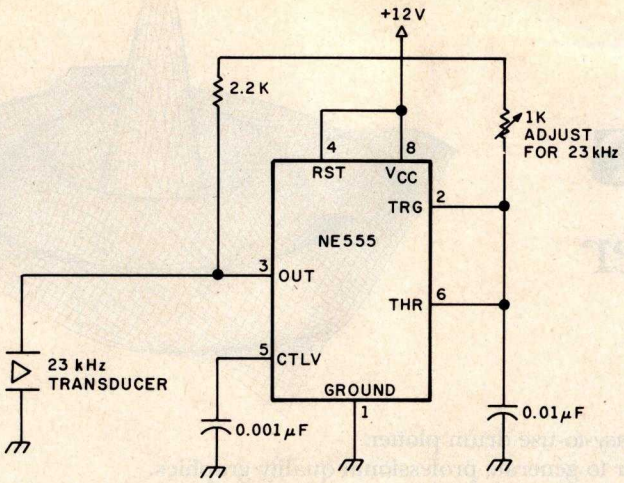

Number	Type	+5 V	GND	+12 V
IC1	LM1812		5, 10, 15	12
IC2	NE555	8	1	
IC3	7404	14	7	

1b

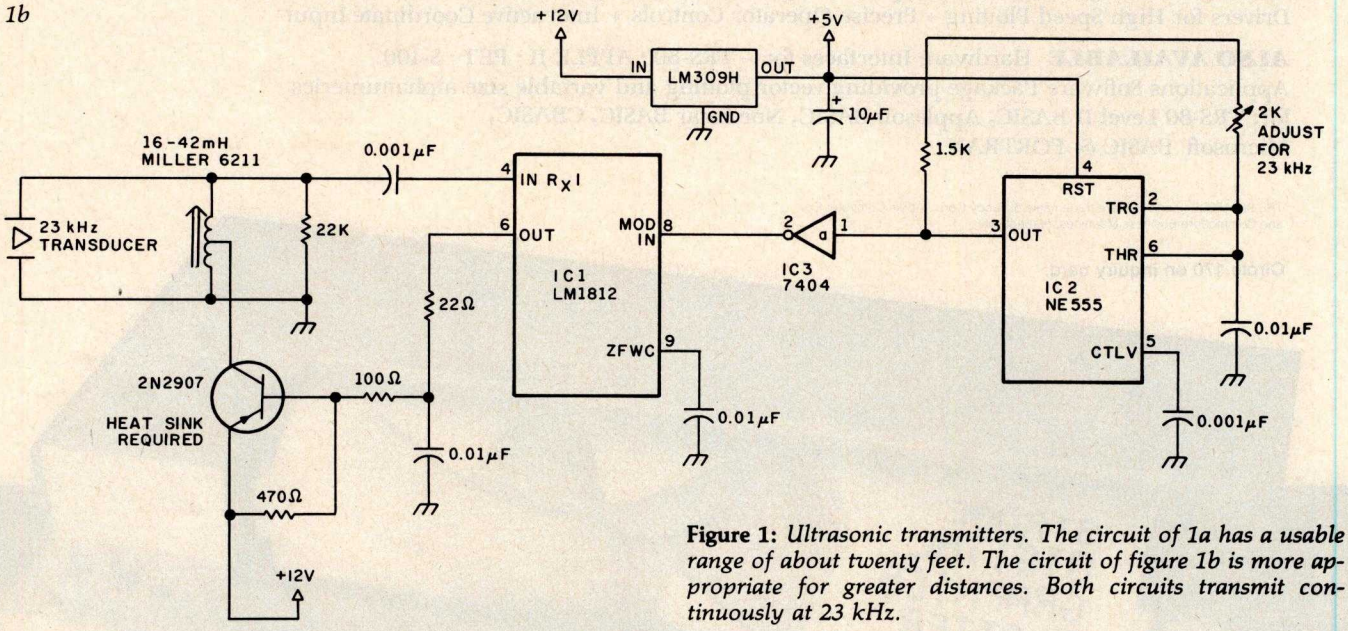


Figure 1: *Ultrasonic transmitters. The circuit of 1a has a usable range of about twenty feet. The circuit of figure 1b is more appropriate for greater distances. Both circuits transmit continuously at 23 kHz.*

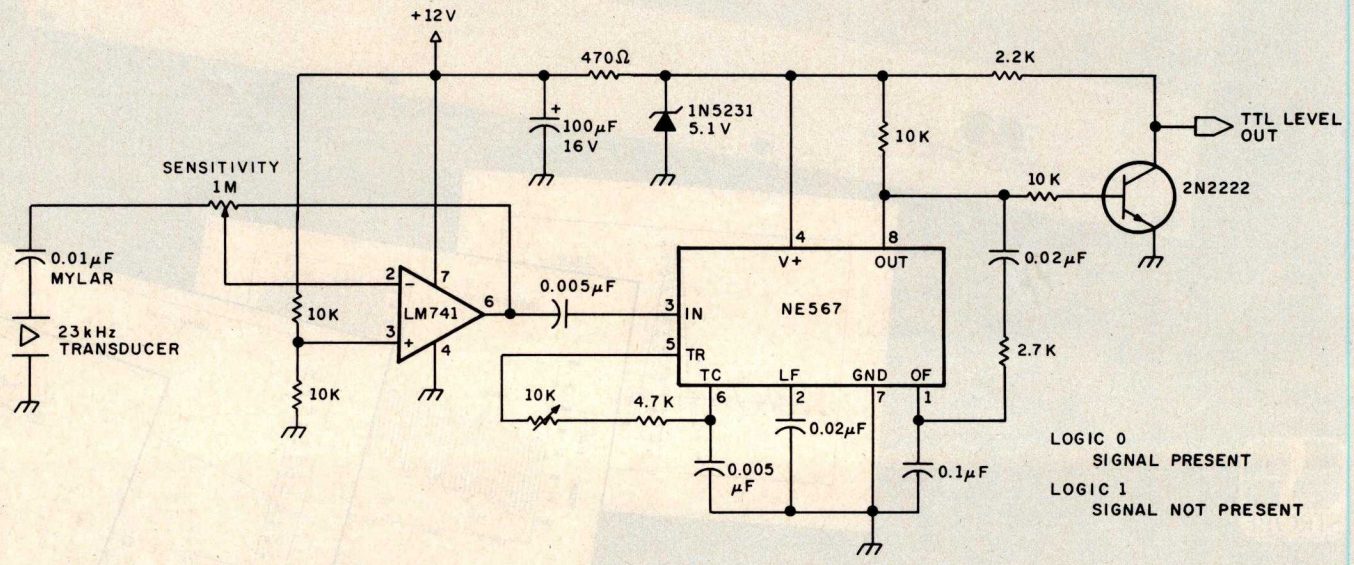


Figure 2: *Ultrasonic receiver. This simple receiver has TTL-compatible outputs, and it will work with either transmitter in figure 1.*


OSBORNE MEANS BUSINESS!

Discover What A Truly Great Business System Can Mean For You!

Buying a business software package can be a difficult and frustrating process. Your needs won't conform to any standardized system, and you can't take the time to develop your own system from scratch. After all, why re-invent the wheel?

Before you (or anybody else) installs a computer system for your business, you owe it to yourself to read our books.

OSBORNE/McGraw-Hill has published these celebrated business programs in book form to help you know what's in a good business software package and what it can do for you.

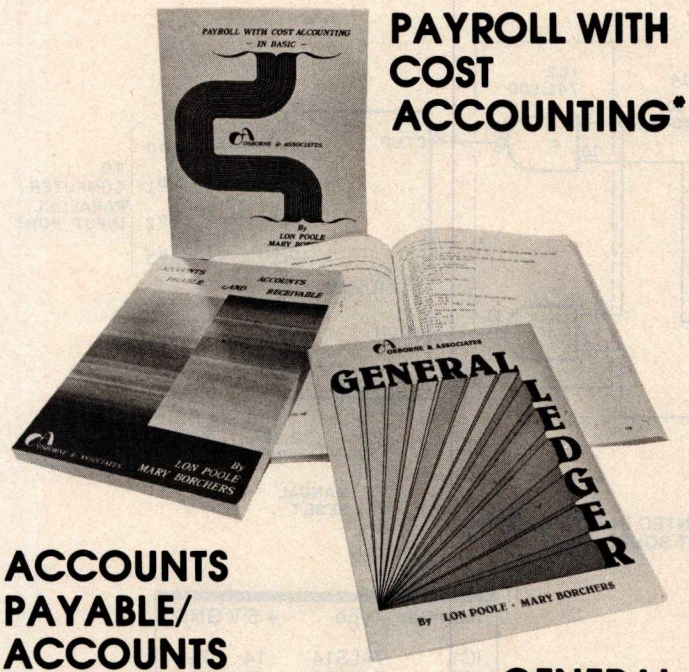

PAYROLL WITH COST ACCOUNTING*

ACCOUNTS PAYABLE/ ACCOUNTS RECEIVABLE*

GENERAL LEDGER*

What to expect from a GOOD business system

Osborne's three business books are renowned for excellence in design and in documentation. Each book is written from a system user's point of view, and carefully describes the mechanical design of the system, including the function and operation of each program. Our books explain in detail how to use the programs. What's more, they contain complete program listings and supporting technical documentation, like data file structure, hardware requirements and specific information about changing and installing the programs. These are also available, ready to run on your computer, from independent dealers in the Osborne Dealer Network. Call or write for a dealer referral list.

Order Form: * The books are available in both Wang BASIC and C-BASIC

Please send me the following books:

Title	Price	Quantity	Amount
Payroll w/Cost Acctg. - CBASIC	$20.00		
Accounts Payable/Receivable - CBASIC	$20.00		
General Ledger - CBASIC	$20.00		

Tax: Calif. residents only 6% / 6 1/2% BART — **Tax**

Shipping: allow 4 weeks 0.75¢ per book USA, $4.00 foreign — **Shipping**

TOTAL

Please send information package for:

☐ End user ☐ Dealer

Name: _____

Address: _____

City: _____

State: _____ **ZIP:** _____

OSBORNE/McGraw-Hill
630 Bancroft Way, Dept. B10
Berkeley, CA 94710

For faster shipment or credit card, phone (415) 548-2805

McGraw-Hill

1124


Circle 171 on inquiry card.

Text continued from page 266:
and the latest designs incorporate an active photosensitive integrated circuit. In fact, Delco Electronics (7 Oakland St, POB 2, Amesbury MA 01913) was offering an under-$30 kit a while back. In your application, with lights flashing on and off this may not be a reliable approach.

There are many ultrasonic systems on the market, and they range in price from $50 to $100. My only criticism of them is that they are prone to false alarms and you may find that the harmonics interfere with the BSR system. If you'd like to try placing one across a doorway or diagonally across a room, you could try the circuits shown in figures 1 and 2. These units operate at 23 kHz. Depending upon the sensitivity setting, they will detect most anything passing through the beam. For small rooms, you won't need much power, so the circuit of figure 1a should suffice. If you need a range of greater than twenty feet, use the higher-power version shown in figure 1b. The receiver for either circuit is shown in figure 2. By the way, the output is TTL (transistor-transistor logic)-compatible. Normally the signal will be a logic 0 (ie: nothing interrupting the beam between the transmitter and receiver); the signal will go to a logic 1 only when someone walks into the room.

The most effective system for detecting motion uses microwave radiation—similar to police radar and operating on the same X-band frequency. In my experience, these are the best by far. They are relatively false-alarm free and very sensitive. I have them installed throughout my home, and I have found their reliability to be exceptional. Unfortunately, they are expensive (in the range of $150 to $400 for domestic installations). A good unit is the Midex 55 made by Solfan (665 Clyde Ave, Mountain View CA 94043). Solfan's more expensive units have contact-closure outputs which would work well in your application.

The final solution to your problem might be to build a people counter. The circuit in figure 3 (sent to me by William Curlew) might be exactly what you need. It consists of two photodetectors (and two separate light sources) mounted in the doorjamb. Normally the light beam is uninterrupted and the output of the photodetectors is low. As long as there is light on both sensors, the output of IC2b is low. As someone starts through the doorway, one of the sensors goes high, clocking the JK flip-flop into one of two direction states. When the person fully enters the doorway, blocking both the sensors, a trigger pulse is generated and sent to gates 2c and 2d. Depending upon the state of the flip-flop, the clock pulse will be directed to either the count-up or count-down line of the 4-bit up/down counter, IC5. The counter will increment as people walk into the room and decrement they walk out. A manual reset is provided to start things out correctly. When the 4 outputs are tied to a parallel input port, your computer can read it as often as necessary to determine how many people are left in the room. Since the counting is done in hardware, timing is not critical. It will accommodate only fifteen people in its present form, so don't have too many guests at your parties. Finally, for absolute certainty, you may want to use it with the ultrasonic circuits previously discussed.
Steve

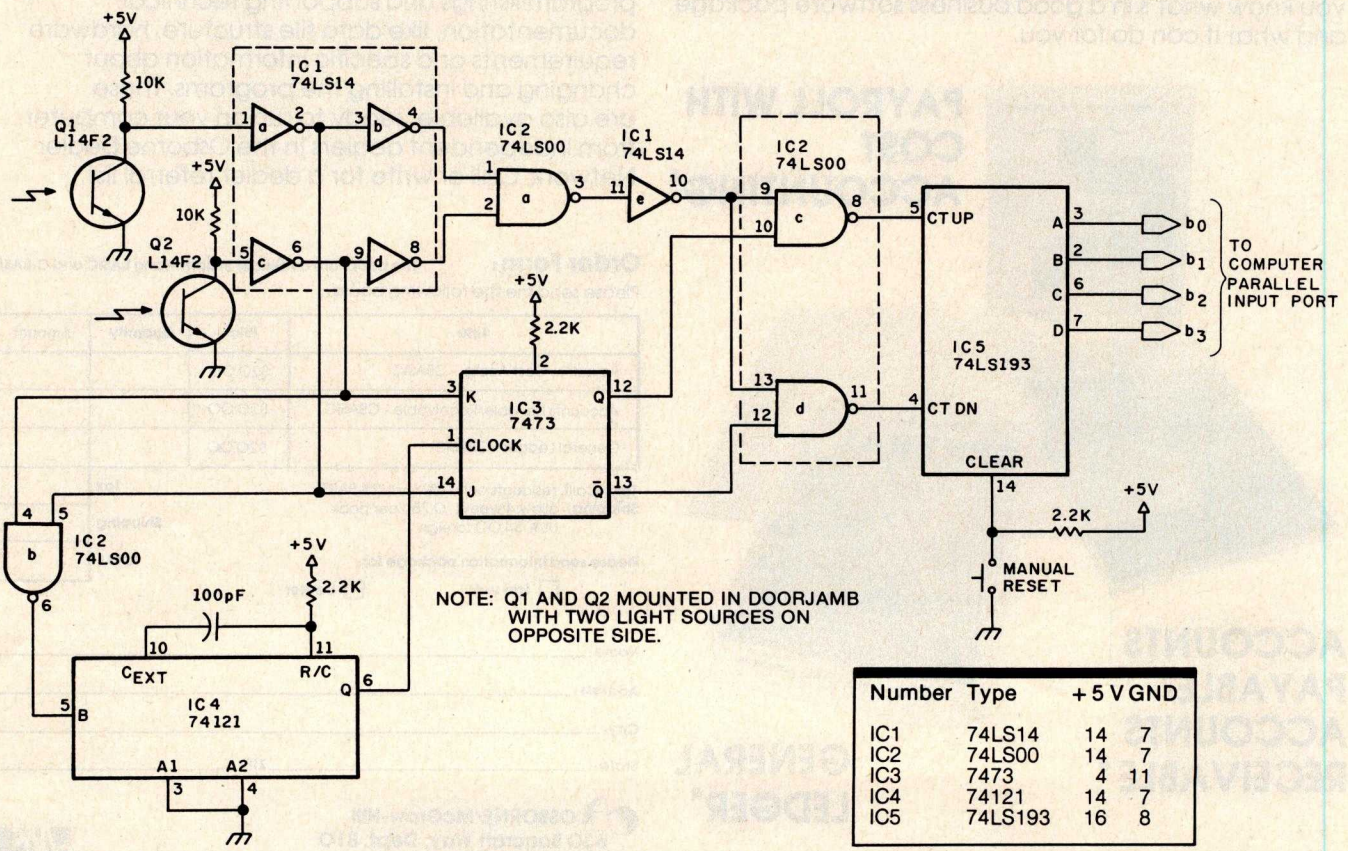

Number	Type	+5 V	GND
IC1	74LS14	14	7
IC2	74LS00	14	7
IC3	7473	4	11
IC4	74121	14	7
IC5	74LS193	16	8

Figure 3: *This circuit is capable of optically detecting the passage of people through a doorway and maintaining a count of people in a room. The photo-transistors sense motion through the doorway and cause the count stored in IC5 (a 4-bit binary counter) to either be incremented or decremented, depending upon the direction of passage.*

$UPER $AVINGS ON SOFTWARE

Limited Time Offer — Offer Expires December 31, 1980

DIGITAL RESEARCH
Double Density or Quad (DISK WITH MANUAL / MANUAL ONLY)
CP/M® 1.4 Northstar . **$149/$25**
CP/M® 2.2 Cromemco **$189/$25**
(Specify Single or Double Density)

TRS-80®
Model I CP/M 1.4 ..... **$129**
Model II CP/M 2.2 ..... **$149**

MICROSOFT
Basic 80 ..... **$269/$25**
Basic Compiler ..... **$325/$25**
Fortran 80 ..... **$349/$25**

MICROPRO
Word-Star (Ver. 2.1) .. **$349/$40**
Word-Star 2.1
with Mail Merge ..... **$465/$65**
Mail-Merge
(Requires 2.0 or 2.1) . **$119/$20**
DataStar ..... **$269/$35**
Word-Master ..... **$119/$25**
SuperSort I ..... **$189/$25**
SuperSort II ..... **$159/$25**
SuperSort III ..... **$109/$25**

COMPUTER PATHWAYS
•Pearl (level 1) ..... **$89/$25**
•Pearl (level 2) ..... **$279/$25**
•Pearl (level 3) ..... **$529/$25**

MICRO-AP
•Selector III-C2 ..... **$249/$20**
•Selector IV ..... **$429/$35**
•Glector ..... **$289/$25**
S-Basic Compiler .... **$289/$25**

WHITESMITHS
"C" Compiler .... **CALL FOR PRICE**
Pascal (incl "C") . **CALL FOR PRICE**

INTERSYSTEMS
Pascal/Z Version 3 A Z-80
Native Code Pascal Compiler
$345

● Requires CBASIC-2
® Mfgs. Trademark
* □ Supplied in source code
□ Requires MICROSOFT BASIC

SHIPPING & INSURANCE
$2.50 Per Package. Prices Assumed Advanced Prepayment COD & Charge Cards 2% Higher

Business Applications Software

PEACHTREE
*□General Ledger ... **$399/$40**
*□Accts Receivable .. **$399/$40**
*□Accts Payable ..... **$399/$40**
*□Payroll ..... **$399/$40**
*□Inventory ..... **$399/$40**
*□Property Mgt ..... **$799/$40**
*□C.P.A. Client Write-Up **$799/$40**
*□Mailing Address ... **$349/$40**

SUPER SPECIAL!
Purchase General Ledger, A/P, A/R, Payroll
(Structured Systems, Peachtree or Graham-Dorian)
AND
DEDUCT AN ADDITIONAL
$100
From The Total Order

STRUCTURED SYSTEMS
•General Ledger ..... **$699/$25**
•Accts Receivable ... **$699/$25**
•Accts Payable ..... **$699/$25**
•Payroll ..... **$699/$25**
•Inventory Control ... **$399/$25**
•Analyst ..... **$189/$15**
•Letteright ..... **$189/$25**
•NAD ..... **$85/$20**
QSORT ..... **$85/$20**

GRAHAM-DORIAN
*•General Ledger .... **$699/$35**
*•Accts Receivable .. **$699/$35**
*•Accts Payable ..... **$699/$35**
*•Payroll ..... **$699/$35**
*•Inventory ..... **$699/$35**
*•Cash Register ..... **$449/$35**
*•Apartment Mgt. ... **$449/$35**
*•Job Costing ..... **$699/$25**

APPLE OWNERS
Now Available!
On Microsoft Z80/CPM Conversion Unit For The Apple
THE APPLESOFT
—Call For Price—
Also Available For Use With It
PEACHTREE
Business Software Application Packages
CALL FOR BARGAIN PRICES

ALL LIFEBOAT ASSOCIATES SOFTWARE LESS 10%

C BASIC II $89

ALL COMPUTER DESIGN LABS SOFTWARE LESS 20%

ELECTRIC PENCIL LESS 15%

All Offers Subject To Withdrawl
All Prices Scheduled To Change December 31, 1980

All Prices Are For Software Supplied On Standard IBM Compatible 8" Single-Density Disk. Add $10.00 Per Disk For The Following 5¼" CPM® Compatible Formats:

-Northstar DD
-Northstar SD
-Northstar Quad
-Micropolis QD
(Vector Graphics)
Superbrain 3.0, DD or QD

(Some 5¼" Transfers Require More Than One Disk). For Other Formats Contact Us For Pricing.
Specify Format To Avoid Delay
8" Assumed If Not Specified

Circle 172 on inquiry card.

master charge THE INTERBANK CARD

VISA

MiniMicroMart, Inc.

1618 James Street, Syracuse, NY 13203 (315) 422-4467 TWX 710-541-0431

Remote Control in Europe

Dear Steve,

Please tell me if the X-10 remote-control system by BSR could be operated on 220 V 50 Hz in Europe. I see from the schematic diagrams and various pictures it is designed to work on 110 V 60 Hz. Do they have a 220 V system? If not, is there any way I could adapt the system to work on a 220 V system.

Please tell me where I can buy the set (ie: common console, cordless controller, appliance module, lamp module, in-wall switch module) using an American Express card; maybe from Sears as you said in your article. If so, please let me know the address of Sears; for that matter, any reliable dealer who accepts American Express. I'll be grateful for the two answers. Next time you are in Europe drop in and see us. We have a wood stove too, and I hope to connect it to the central heating system.

Rangith Amitirigala
Brugg, Switzerland

Up to this point the X-10 system has been available only in the American version (115 VAC 60 Hz). The custom LSI (large-scale integration) device used in the American units, surprisingly enough, can work on either 50 or 60 Hz. The polarity set on pin 13 of the command-console integrated circuit selects either of the two operating frequencies. These consoles cannot, however, be easily converted from 115 V to 220 V operation without considerable component changes.

A call to BSR (USA) Ltd in New Jersey produced some fruitful answers to your question. Even though BSR is working on a European version of the X-10, another company has just announced availability of a 220 V 50 Hz unit. I suggest that you contact this firm for price and delivery. The source is: Busch-Jaeger Elektro GmbH, 5880 Ludenscheid, Freisenberg, Post Fach 1280, West Germany (BRD).

As for Sears Roebuck and Company, it is my understanding that the firm accepts only its own credit card. Rather than worry about which stores will accept your credit card, you may find it easier to go your local bank (in Switzerland) and arrange for a letter of credit or bank draft when ordering from an American company.

Steve

Operational Amplifiers

I have been using the AD284J isolation operational-amplifier system that you described in "Mind Over Matter" (June 1979 BYTE, page 49) as an EKG (electrocardiogram) monitor, in conjunction with a surplus chart recorder. Can you recommend some books that will help me to learn more about operational amplifiers?

Matsutoshi Uchiyma
Tokyo, Japan

I am glad you are gaining experience with the circuit. As far as expanding your mind a little, I suggest the following books:

- Operational Amplifiers —Design and Applications, *Jerald G Graeme, Gene E Tobey, and Lawrence P Huelsman, McGraw-Hill Book Company, New York NY 1971.*
- Applications of Operational Amplifiers—Third Generation Techniques, *Jerald G Graeme, McGraw-Hill Book Company, New York NY 1973.*
- Handbook of Operational Amplifier Circuit Design, *David F Stout and Milton Kaufman, McGraw-Hill Book Company, New York NY, 1976.*

I hope these help.
Steve

Introducing . . .

mINDex system—one & MINDexCHANGE softsources

System—one is a Pascal based information storage and retrieval system. Softsources are ready made databases of computing resources, contract clauses, bibliographic references, and more.

mINDex is suitable for the researcher, lawyer, contractor, educator, and student. Virtually anyone assembling or accessing text based information may benefit from this versatile and productive information management tool.

mINDex can scan volumes of data for you and extract what is most relevant to your needs.

mINDex is designed to adapt to your special vocabulary through a simple dictionary of key words or through a more complex but effective thesaurus of key concepts as defined by associated word groups.

mINDex can assist a legal practice or contractor's office in the generation of legal documents from standard clauses, and in searching case briefs for legal precedents.

mINDex infosystems

mINDex Features:

- Variable length text records which may span files and disks to accommodate large databases.
- Ranked retrieval in order of closest match to your inquiry.
- Interactive inquiry as well as retrieval from inquiry archive files.
- Fully automatic association of your key words to all or a selected range of text records.
- Optional indexing on all text in a record or on delimited key word groups and the ability to suppress key group output.
- Formatting and output controls with specifiable destination.

Introductory prices:

mINDex system — one, for UCSD Pascal I.5, II.0, or PASCAL/M with sample databases and manual . . $ 175
mINDex manual only . . . . . $ 20

MINDexCHANGE softsources from $ 25 prices vary with database, please inquire for specifics.

Contact: mINDex infosystems
81 Centennial Loop, Suite A
Eugene, Oregon 97401
Ph: (503)485-5827

Shipped on 8" single-density soft sectored diskettes.

UCSD Pascal is a registered trademark of The Regents of the University of California. PASCAL/M is a trademark of Sorcim.

Beyond "Cyclops"

Dear Steve,

I consider your series of articles the best collection of homebrew-type construction ideas and projects available to the personal-computer experimenter. Your article "Self-Refreshing LED Graphics Display" (October 1979 BYTE, page 58) has prompted me to write you.


I'd like to propose a project to you. I understand that a construction project called "Cyclops" appeared in *Popular Electronics* that actually used a dynamic-memory integrated circuit to act as a "pseudo-image sensor." Can this unique idea be extended to larger-area memory devices? The 4 K-byte circuit would make a nice 64-by-64 element array.

Jesse Newton

Thanks for the pat on the back. Sometimes late at night I need it.

I remember that article

Circle 173 on inquiry card.

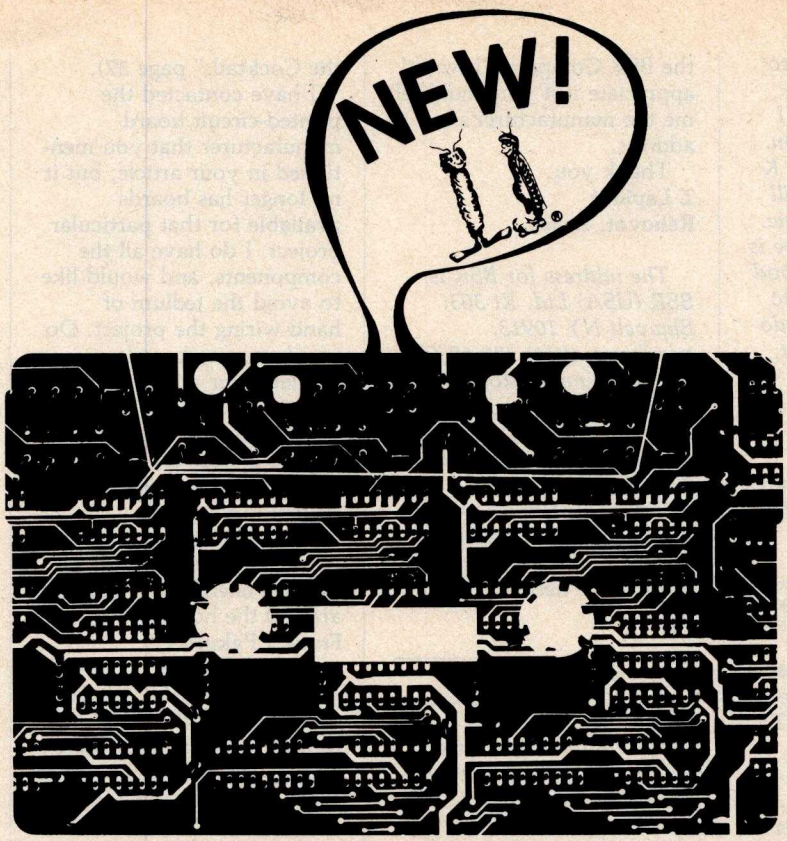

SAMS CIRCUIT DESIGN SOFTWARE.

37 TECHNICAL PROGRAMS TO LET YOU SPEND LESS TIME ON ROUTINE CALCULATIONS, STATISTICS, ANALYSES...MORE TIME ON CREATIVE DESIGN AND ENGINEERING.

Sams—the leader in technical publishing—now offers the most advanced engineering software systems available. These tested, documented, debugged programs can be used as stand-alone programs or as subroutines for more complex programs.

■ **FASTER INFORMATION**—Solve simultaneous equations with real and complex coefficients and polynomial roots. Quickly determine the effects of an infinitely variable set of design parameters. Plot graphs for various functions while varying scales to fit data.

■ **EASY TO RUN**—7 cassettes include 37 debugged programs.

■ **FULLY DOCUMENTED**—Easy-to-read and follow instructions.

■ **DESIGNED FOR POPULAR MICROCOMPUTERS**—Designed for use on TRS-80* systems having Level II BASIC and at least 16K RAM; many of the routines can be adapted to run on other popular computers. Programs will be available soon for Apple and Ohio Scientific.

■ **PROGRAMMED, TESTED, AND DEBUGGED BY HOWARD M. BERLIN**—Howard M. Berlin—an author in the Blacksburg Series—is an electrical engineer with the Chemical Systems Laboratory at Aberdeen Proving Ground, Maryland, and has been adjunct instructor in the Department of Electrical Engineering at the University of Delaware.

☐ **PLOTTING GRAPHS FOR VIDEO DISPLAY** (5 Programs)
Histograms. Cartesian Plots. Semi-Logarithmic Plots. Log-Log Plots. Polar Plots. #26006. $16.95.

☐ **PLOTTING GRAPHS FOR LINE PRINTER** (3 Programs)
Cartesian Plots. Semi-Logarithmic Plots. Polar Plots. #26000. $16.95.

☐ **ACTIVE FILTER DESIGN** (6 Programs)
Low and High-Pass (Bessel, Butterworth, 1, 2, and 3-dB Chebyshev). State-Variable Filter. Bandpass Filters with Q's less than 10 and 50. Staggered-Tuned Butterworth Bandpass Filters (2, 3, or 5 states). Notch Filter. #26001. $21.95.

☐ **DESCRIPTIVE STATISTICS & REGRESSION ANALYSIS** (3 Programs)
Descriptive Statistics (mean, standard deviation, variance, kurtosis, z-scores). Curvilinear Regression (linear, inverse, polynomial, exponential, logarithmic). Multivariable Linear Regression. #26002. $21.95.

☐ **ELECTRONICS I** (5 Programs)
Zener Diode Voltage Regulator Design. 555 Timer Design (monostable and astable circuits). Transistor Bias Parameters. Single-Stage Transistor Amplifier Design. Heat Sink Selection and Design. #26003. $16.95.

☐ **ELECTRONICS II** (7 Programs)
4-Quadrant Arctangent Function. Rectangular/Polar Conversion and Complex Number Mathematics. Minimum and Maximum Values of an Array. Roots of Polynomials with Real Coefficients. Inverse Laplace Transforms of a Transfer Function. Solution of Simultaneous Equations with Real and Complex Coefficients. #26004. $16.95.

☐ **ELECTRONICS III** (8 programs)
Average and RMS Values of a Periodic Function. Fourier Series Expansion of a Periodic Function. Fourier Transform and Spectrum Plot. Analysis of Damped Oscillations. Impedance Matching Pads. PI-TEE (delta-wye) Transforms. #26005. $16.95.

☐ CIRCUIT DESIGN PROGRAMMING BOOK FOR THE TRS-80.
Circuit Design Programs for the TRS-80 by Howard M. Berlin features all of the programs listed above...and more. #21741. $12.95.

Indicate quantities in the boxes and return entire ad with order.

Mail to: **Howard W. Sams & Co., Inc. • P.O. Box 7092**
4300 West 62nd Street
Indianapolis, IN 46206. (317) 298-5400.

AMOUNT OF ORDER: $_____
(add local tax where applicable)

☐ PAYMENT ENCLOSED **AD048**

☐ CHECK ☐ MONEY ORDER
☐ VISA ☐ MASTER CHARGE Interbank No._____

Expiration Date:_____

Account No.:_____

Name (print):_____

Signature:_____

Address:_____

City_____ State_____ Zip_____

SEND INFORMATION ABOUT PRICE AND AVAILABILITY FOR SAMS SOFTWARE FOR: ☐ APPLE ☐ OHIO SCIENTIFIC.

Sams Software Systems are available from major Sams Distributors and Computer Stores. Prices good in U.S.A. only. In Canada, contact Lenbrook Industries, Ltd., Scarborough, Ontario, M1H 1H5, Canada. Offer expires 1/31/81.

*TRS-80 is a registered trademark of Radio Shack, a division of Tandy Corp.

Sams Books®

Circle 174 on inquiry card.

well, and I have wanted to try exactly what you suggest. I've waited because I want fairly high resolution. Perhaps with the new 32 K and 64 K bit devices I will try it. Give me a little time.

The real problem I have is that there are so many good article ideas. I still want to put a computer in a car, do something with solar heat, remote control, and robotics. As long as you haven't been dissatisfied with everything so far, I trust that I'll find something interesting in the meantime.
Steve

Across-the-Sea File

Dear Steve,

I read with great interest your article "Computerize a Home" (January 1980 BYTE, page 28), and I am interested in the BSR X-10 system.

I contacted the Commercial Section of the US Embassy here and also my employer's purchasing agent in New York, but neither could find me the address of the BSR Company. I would appreciate it if you could tell me the manufacturer's address.

Thank you.
Z Lapidot
Rehovot, Israel

The address for BSR is: BSR (USA) Ltd, Rt 303, Blauvelt NY 10913, telephone: (914) 358-6060. There are many stocking distributors for its products including: The Software Exchange, 6 South St, Milford NH 03055.

BSR is an English company, and there may be outlets closer to you than those listed here.
Steve

Point-to-Point

Dear Steve,

My compliments for a fine set of articles over the years. Only recently have I had the time to try some of the projects you write about. I am planning to build the DVM (digital voltmeter) from your article in the January 1978 BYTE ("Add More Zing to the Cocktail," page 37).

I have contacted the printed-circuit board manufacturer that you mentioned in your article, but it no longer has boards available for that particular project. I do have all the components, and would like to avoid the tedium of hand-wiring the project. Do you have any boards available for a reasonable price?

I plan to use this circuit as part of a solar-energy-collector measurement system (among other things). I'm also trying to work out a method to manage energy consumption around the house.
Frank J Pakulski

A lot of people have built and are using the DVM interface you mention. (Please note a typographical error in table 1 of that article. On IC1 pin 24 is +5 V, pin 13 is ground, and pin 12 is −5 V.) I'm sorry that the company that once sold the components no longer supplies them. I have noticed that companies such as Jameco sell the MC14433 DVM chip, but not the printed-circuit board.

Recently, I have been arranging for boards and kits on some of my articles. This time the sources are more closely regulated and the boards and parts will be available far into the future.
Steve

In-Depth Information Center

Dear Steve,

I would like you to recommend some texts that would introduce me to computer hardware, from basic switching theory through the actual architecture of a computer. I'm tired of superficial prose intended for the general consumer. I need some more in-depth information that is found only in engineering texts. You know, something that presents the computer from the electronics engineer's point of view in a well-structured manner. What do you suggest? As a postscript, I would also like to learn about Pascal.
Daniel R Shook

You ask an extremely difficult question. I have talked to other computer enthusiasts and it seems that (given the wide variety of texts and computer books being published) no two can agree on what is best. I have felt that there is a void in this area, and, as a matter of fact, I have just written a book on building a Z80 computer system from scratch. It's above the introductory level, but not just for engineers—similar to my articles. It should be published in early 1981.

In the meantime, I suggest you join the McGraw-Hill Electronic & Control Engineers book club. Many of its monthly selections are introductory texts written for engineers.

A good book on Pascal is Pascal User Manual and Report—Second Edition, *by Jensen and Wirth from Springer-Verlag.*
Steve ■

ARTIFICIAL INTELLIGENCE For Your **C/PM® or S-100 SYSTEM**

"SHIVA™" is a highly-sophisticated VIRTUAL-PERSONALITY™ multi-level multi-user multi-tasking executive (operating system) for S-100 based systems. It provides your microcomputer system immediately with power comparable to that of large-frame maxi-computers for a remarkably small price, yet SHIVA™ requires surprisingly little R.A.M. area, and is conversational!!! SHIVA's™ English-like input/output is interactive, dynamic, and may be reconfigured or expanded by the user. And SHIVA™ gives you the freedom to expand indefinitely . . . with tremendous hardware and software choice: SHIVA™ supports hard disks and floppies . . . R.A.M. addressing beyond 64 kilobytes . . . time-sharing . . . multi-level user-reconfigurable password protection . . . and features shell-commands similar to UNIX® in structure!!

SHIVA™ is compatible with C/PM® and C/DOS® for easy implementation and near universal software support!!! SHIVA™ is available for 8080, 8085, MC6800, 6502, and Z80®-based systems.

Versions are in development for ZILOG Z8000® 16-BIT, INTEL 8086® and INTEL iApx-432® 32-BIT PROCESSORS . . .

And Omega Research™ is dedicated to non-obsolescence and system superiority in software choice . . . . SHIVA™ supports BASIC, FORTRAN, COBOL, a MACRO-ASSEMBLER, DATA BASE MANAGEMENT, ALGOL-60, PASCAL . . . . interfaces in development for UNIX®, C, LISP, PL/I, APL, and RT-11®.

And needless to say, SHIVA™ is very fast . . . . . .

SHIVA™ . . . . $350 — Available on 8" I.B.M. Soft-Sectored Disks and 5" C/DOS® (Cromemco) Diskettes. Includes complete Documentation. . . M.C. & Visa orders accepted

"SHIVA™," "VIRTUAL-PERSONALITY™," and "OMEGA RESEARCH™" are trademarks of OMEGA RESEARCH.
"RT-11®" is a trademark of DIGITAL EQUIPMENT CORPORATION.
"UNIX®" is a trademark of BELL LABORATORIES
"CP/M®" is a trademark of DIGITAL RESEARCH OF CALIFORNIA
"C/DOS®" is a trademark of CROMEMCO, Inc.
"Z-80®" and "Z-8000" are trademarks of ZILOG, Inc.
"INTEL®" is a trademark of INTEL CORPORATION

No shipments prior to return of signed software license agreement. For detailed information on "SHIVA™," send $1.00 postage and handling to:

master charge VISA

CALIFORNIA RESIDENTS ADD 6% SALES TAX

OMEGA RESEARCH™
P.O. Box 479
Linden, Ca. 95236
(209) 334-6666
9am to 5pm Mon.-Fri.

Circle 175 on inquiry card.

WE CAN TAKE YOU FROM WATERLOO TO THE SUPER BOWL. (By way of the North Atlantic.)

In the few short months since we introduced Computer Bismarck™, we've transported over 2500 adventurous minds to the North Atlantic – there to recreate the historic battle between the awesome German warship and the British Home Fleet. The startling realism and excitement of that experience have prompted many well-seasoned travelers to proclaim it "...unique among computer games and board games alike.*" One enthusiast had this to say: "The wealth of detail...is hardly short of fantastic. Only real war rooms...in the Pentagon have ever before been able to simulate a battle in this manner.**" Now we offer two more strategy games to embark you on new flights of the imagination.

COMPUTER NAPOLEONICS™

takes you to the battlefields of Waterloo on the fateful day of June 18, 1815. Here, the greatest battle ever fought is about to begin, awaiting only your commands to set the amassed armies in motion.

You and your friend choose your role – either as the military genius, Napoleon, or as the Duke of Wellington, the iron-willed leader of the Anglo-Allied forces. The video screen displays the map of the Belgian countryside with the artillery, infantry, and cavalry units under your respective commands.

AS NAPOLEON, you must utilize your superior combat strength and numbers to deal Wellington a quick and decisive defeat before his Prussian ally can supply reinforcements. Speed is of the essence. But any tactical blunders in military deployment will result in a repeat of history – Napoleon's ignominious defeat.

AS THE DUKE OF WELLINGTON, you must not only survive the onslaught of the French artillery, cuirassiers, and the dreaded Imperial Guard, you must also inflict sufficient damage to Napoleon's forces to prevent his relentless northward march of conquest.

THE COMPUTER, in our solitaire scenario, plays Wellington while you play Napoleon. Two levels of play are provided by making the entry of Prussian reinforcements variable. This makes the need for French military decisiveness and devastating execution even more critical.



FOR THE NOVICE AND THE ADVANCED. Computer Napoleonics has all the advantages of your basic, traditional wargame –meticulous detail, realism, and playability. Plus one. Because the computer keeps track of all the rules, neither player can make an illegal move. This makes learning it a cinch (mastery is quite another matter), and it will convert the novice wargamer into a fanatic in no time.

The advanced wargamer will find the computer a worthy opponent indeed, and the two levels of play in the solitaire version will challenge the most experienced of strategists.



COMPUTER QUARTERBACK™

propels you onto the playing field of the Super Bowl. From its multiple offensive and defensive plays and its real-time playing conditions to the animated video display of the grid-iron and the halftime statistics, no strategy football game has ever been more complete in detail or as exciting in realism. Three versions are offered: Semi-Pro, Pro, and Computer-as-Opponent.

SEMI-PRO presents you with a choice of 18 offenses and 14 defenses. Here, you will begin to learn the intricacies of football; the thrill of the perfectly executed two-minute drill; the agony of the fumble, interception, and penalty. On offense, you will learn to read the defense and call audibles as needed.

After you have mastered the Semi-Pro version, it's time to move on to the Big Time...the Pro version!

THE PRO VERSION not only gives you every offense (36) and defense (24 plus double-teaming capabilities and special alignments) you could ever want, it also gives you the team you want! With 2.7 million computer dollars, you get to draft a team to your style and specifications. Spend more on your quarterback and receivers and your passing game may very well be unstoppable...but your running game may suffer for lack of funds.

THE COMPUTER eliminates all the organizational drudgery of conventional board games. It plays scorekeeper, referee, umpire, and linesman. As timekeeper, it makes you play in real-time. Take longer than 30 seconds to hike the ball and five yards will be marched off against you for delay-of-game.

"THE ROBOTS" is the team most ably coached by your friendly computer. It's ready to play any time you are. It even "learns" your tendencies and patterns through time, and it will make the necessary tactical adjustments. It plays so well you must be in top form to stand a chance against it.

All you need to start on these mind journeys is an Apple II with Applesoft ROM card, 48K memory, and a mini-floppy disc drive. For $59.95, Computer Napoleonics comes with the game program mini-disc, two mapboard cards, a rule book, and two player-aid charts. Computer Quarterback, for $39.95, gives you the game disc, a rule book, and four play diagram charts.

Credit card holders, call **800-648-5600 (toll free)** and charge your order to your VISA or MASTERCHARGE. In Nevada, call 800-992-5710. For Computer Quarterback, ask for Operator 178; for Computer Napoleonics, Operator 179.

While you're at it, you can also get our other games:

- *Computer Bismarck* for your Apple: $59.95 (Operator 180)
  Computer Bismarck, TRS-80 48K Disc: $59.95;
  32K Cassette: $49.95
- *Computer Ambush* (a tactical simulation of man-to-man combat in World War II) for your Apple: $59.95 (Operator 181)

To order by mail, send your check to Strategic Simulations Inc., Dept. B, 450 San Antonio Road, Suite 62, Palo Alto, CA 94306. Our 14-day money back guarantee assures your satisfaction.

STRATEGIC SIMULATIONS INC.

*Creative Computing, Aug. 1980.
**Popular Mechanics, Aug. 1980.

Apple is a registered trademark of Apple Computer Inc.
TRS-80 is a registered trademark of Tandy Corporation.

Circle 176 on inquiry card.

Text continued from page 82:

subroutine name, length, and the subroutine instructions. Thus, our load-subroutine primitive can be represented as:

LSUB N,L,$D_0..D_{n-1}$

where:

N = subroutine name or number
L = subroutine length
D_i = subroutine instructions

For example, the primitive:

LSUB CLIP,5,$D_0..D_4$

loads a subroutine named CLIP with the given five instructions.

In order to maintain a sense of symmetry with these primitives, we need to include a primitive to read back a given subroutine. Although this feature does not affect the displayed image, it does aid the host in debugging and keeping track of the current status of the display. Thus, we require a read-subroutine primitive, which can be represented as:

RSUB N

where:

N = subroutine name or number

For example, the primitive:

RSUB CLIP

reads the instructions of the subroutine CLIP and presents the data to the host.

We have also assumed the existence of a programmable symbol generator. In order to support this feature, there is the need for some method of loading the generator. We either need to load an entirely new font definition in the symbol generator or alter only certain symbols: thus we must provide the option of loading the entire set or only one element. We can define each symbol by providing data which represents either the vectors that make up the symbol or by defining a bit pattern that forms the image of the symbol. In either case, our load-symbol primitive can be represented as:

LSYM M,(A,)$D_0..D_n$

where:

M = mode (*A*ll symbols or a *S*ingle symbol)
A = symbol code (optional: for single symbol only)
D_i = data mask defining the symbol

For example, the primitive:

LSYM S,80,D_0..

loads the symbol numbered 80 with the given data mask.

Symmetrically, we must include a primitive to read back the data describing a single or all symbols. This feature is necessary to be able to produce hard copies of the displayed image. The host must know, if an image is to be plotted, how the current font is defined. We use the same justification as above to support the option of reading all or only selected symbols. Mnemonically, our read-symbol primitive can be represented as:

Call on John D. Owens for all Your Computer Needs

JOHN STARTED PROGRAMMING IN 1959 AND HAS WORKED ON THE IBM 704, UNIVAC I, NCR 304, CDC 6600, IBM 360/370 AND MANY OTHERS. WHEN YOU CALL ON US, JOHN's EXTENSIVE EXPERIENCE BECOMES AVAILABLE TO YOU.

IMS 5000 and 8000 Systems
The new rising stars! Beautifully designed and constructed with the Industrial Micro System reputation for fine quality. These systems feature a Z80 CPU, S-100 bus; double density drives (either single or double sided) CP/M®. 5000 series uses mini floppies, 8000 uses maxi floppies. Hard disk and MP/M now available.

Model 5-00125 with two double density drives, 32K Static RAM $2,765
Model 8-00125 as above but with 8" drives $4,185

AMPEX DFR-900 HARD DISK DRIVES
Winchester media; 16MB removable; 32, 64 or 96 MB fixed. These drives are totally integrated with the IMS hardware and CP/M. We can furnish a package consisting of an IMS system, your choice of CRT or printer, optional hard disk and applications software.

DRIVES
Per Sci 299B Now Available!!! ... $2,200
Cabinet and power supply $300
Per Sci 277 ..$1,210 Shugart $525
MPI B51 .... $265 B52 ..... $365
Innotronics and QUME also available

HAZELTINE 1500 ..... $885
1510..... $980 1520 ..... $1,210
1420 (two year warranty) $775

DEC LA 35/36 Upgrade $750
Increases baud rate to 1200. Microprocessor controlled. Many features include TOF, tabs and margin control.

We have no reader inquiry number.
Call on us for product sheets.
Dealer inquiry invited.
Prices subject to change without notice.
CODs accepted at no extra charge.

TELEVIDEO SMART CRTs
912 B and C $780
920 B and C $850

IMS MEMORY 16 K static $285
32 K static $585
64 K Dynamic with parity $950

TEI MAINFRAMES, S-100
12 slot $500
22 slot $670

TARBELL
Double density controller $420
Cables $40

CALIF. COMPUTER SYSTEMS
CONTROLLER Single or double density; 5¼ or 8"drives. ROM Addressable. Price includes CP/M® 2.2 ..... $395

WE EXPORT: Overseas Callers: TWX 710 588 2844
Phone 212 448-6298 or Cable: OWENSASSOC

We Are Known for Our Prompt and Courteous Service!

JOHN D. OWENS
212 448-6283 Associates, Inc. 212 448-6298
212 448-2913 12 Schubert Street
Staten Island, New York 10305

RSYM M(,A)

where:

M = mode (*A*ll symbols or a *S*ingle symbol)
A = symbol code (optional: for single symbol only)

For example, the primitive:

RSYM A

reads back the entire font definition to the host.

In order to fully support a requirement for hard copy, two final primitives have to be provided. First, since we have assumed the existence of a color-look-up table, we must have some manner of reading back the values of the table to the host. Otherwise, the host would have to keep track of the current color definitions. This primitive thus reduces the host's bookkeeping and allows information on the actual displayed colors to be read back. For the same reasons as we described for the load-color-memory primitive, we must support the same options of reading back either the entire table, one entire parameter, or all parameters for one color code. Mnemonically, we can represent our read-color-memory primitive as:

RCRAM R,M(,A)

where:

R = reference (*I*ntensity, *H*ue, or *S*aturation color memory, or *A*ll)
M = mode (*S*ingle address or *A*ll addresses)
A = address (optional: for single address only)

For example, the primitive:

RCRAM I,A

reads back the contents of the entire intensity color memory.

Finally, we must be able to read back values of the pixel data itself. This feature is necessary not only for the support of hard copy, but allows the host to interrogate the display to read back the values of pixels at specified points in the image. We use the same justification as for the load-pixel primitive to support the various options of reference (full-frame, viewport, or X,Y). Mnemonically, our read-pixel primitive can be represented as:

RPIX R

where:

R = reference (*F*ull-frame, *V*iewport, or *X,Y*)

For example, the primitive:

RPIX F

reads back the contents of the entire display-frame buffer.

This completes our set of graphics

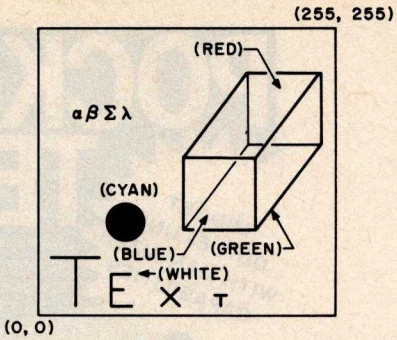


Figure 5: *A sample of the images produced by Micrograph using the primitives of listing 1.*

Call on John D. Owens for all Your Computer Needs

TELETYPE Model 43 Inventory Sale/!!!
Model 4320 AAK and AAL $1,085
Model 4330 punch/reader. 10 or 30 CPS.
8 level, 1" tape $2,595
Limited supply of Model 45 available.

IBM 3101 CRT Model 10 ..... $1,195
Model 20 ..... $1,395
Selectric-like, detached keyboard. 9x16 dot matrix. Maintenance contract from IBM only $70 per year.

ITHACA INTERSYSTEMS
Full S-100 IEEE Compatibility! Full 24 address bits. DMA disk controller. SYSTEM 2A includes 20 slot mainframe with front panel, 64K Dynamic RAM. Z80 CPU, 4 MHZ, extended addressing capability. 4 parallel, 2 serial I/O, floppy controller. **Our discounted price** $3,236

MARINCHIP SYSTEMS M9900
Elegant 16 bit CPU, S-100 compatible Multi user, multi processor operating system. Extended precision commercial BASIC, FORTH, META, PASCAL, Word Processor and Text Editor. Fast and powerful!
Complete kit and software package $550
Assembled $700
We configure complete systems with floppy or hard disk.
MARINCHIP USERS: QBASIC for the 9900 ..... $220
16 bit, 32K words, 64K BYTES memory $1,050

MICROANGELO $2,280
High resolution graphics system. Microangelo features 15", 22MHZ, green phospher screen, 72 key keyboard; includes complete cabling and software. From SCION.

GRAPHICS SOFTWARE On line, real time, for the M9900 to drive the Microangelo. For use in design of PC board masks, IC masks and other applications usually requiring a $200,000 system.

COMPUTER TO COMPUTER COMMUNICATIONS
Enables communications from a micro to a terminal or to another micro, mini or maxi computer. Modes of operation: TERMINAL (your system acts like an intelligent terminal), FILE-TO-FILE, LOCAL (Disk commands), Full/Half Duplex on 8" or 5" disks. COM to COM mode does full CRC 16 error check and retransmits block on error.
Object Code ..... $75 Source Code $150

INDUSTRIAL MICRO SYSTEMS
TELETYPE
HAZELTINE
IBM
TELEVIDEO
TEI
TARBELL
CORVUS
PER SCI
NEC
ITHACA INTERSYSTEMS
MARINCHIP
DATA SOUTH
QUME
CENTRONICS
TEXAS INSTRUMENTS
ATARI
DEC
CALIFORNIA COMPUTER SYSTEMS
KONAN
EDGE
TECHNOLOGY
INNOTRONICS
XEROX
DIABLO
INTEGRAL DATA SYSTEMS
CROMEMCO
SOROC
MICROPRO
TELETEK
NOVATION
AMPEX
CDC
NORTH STAR
COMMODORE
SCION
MPI
POWER ONE
MEASUREMENT SYSTEMS AND CONTROL

WE OFFER A FULL RANGE OF EXPERT CONSULTING SERVICES COVERING ALL AREAS OF COMPUTER APPLICATIONS AND SYSTEMS.

JOHN D. OWENS
Associates, Inc.
SEE OUR AD ON FACING PAGE

Circle 177 on inquiry card.

POCKET ASCII TERMINAL

MIDGET DUPLEX UNIT WITH MAN-SIZED CAPABILITIES

Here's $395 worth of convenience for anyone working with digital systems. Carry it anywhere in a pocket, valise or toolkit to enter and retrieve data, run diagnostics, change constants, test data links, etc.



Look at its facilities:

- **Transmits 128 ASCII codes**
- **Can display last 30 characters received**
- **Displays full 64-character ASCII set on clear 16-segment LEDs**
- **25-line RS232/c compatible interface**
- **Single 5V supply required at 400mA typical**
- **110 or 300 baud transmission selectable**
- **Parity codes, stop bits settable to your standard**
- **Obeys bell, cursor and data format control codes**

Phone or write us for more details now:

GR ELECTRONICS,
1640 Fifth Street,
Santa Monica, CA 90401.
Telephone: (213) 395-4774.
Telex: 65-2337 (BT Smedley SNM).

DATADISK SYSTEMS

CP/M* FOR NORTH STAR SYSTEMS

CP/M 2.2 — The industry standard 'software bus' specially tailored for the North Star disk systems and 8080, 8085, Z80 microcomputers. Fully supports all standard North Star I/O and single, double or quad capacity disk drives. A minimum of 24K of continuous ram memory starting at location zero is required. The following Digital Research (dr) and Datadisk Systems (dd) programs are included on your CP/M diskette: ..... †$150/$25

ED (dr) — Text Editor. Used to write programs in most languages and modify any ASCII disk file. Delete, substitute, search on char/string/line number/relative position, block move, global change, macro commands. ED is your window to CP/M compatible software.

ASM (dr) — 8080 Assembler. Uses standard 8080 mnemonics and pseudo-ops. Conditional assembly, HEX file generation, assemble listings, multi-disk file transfer.

PIP (dr) — Peripheral Interchange Program. File transfer between disk and logical devices. Software file routing, concatination, pagination, text extraction, case conversion, line numbering and much more.

SUBMIT (dr) — Batch ED, PIP, DDT, ASM and associated parameters into user defined processes.

DDT (dr) — Dynamic Debugging Tool. 8080 assembly language run-time monitor. Real time between break points, tracing, full internal register display and alteration at any step, single step, disassembly, assembly, the list goes on and on. If you write device controllers, DDT is an invaluable tool.

STAT (dr) — Status/alteration of logical-to-physical devices, disk drive parameters, storage space, file size.

LOAD (dr) — Convert 8080 'HEX' files (output of ASM) into machine executable code. Programs are then executed by typing the program name.

MOVCPM (dr) — Reconfigure your system to another memory size.

SYSGEN (dr) — Create new system diskette.

DSTAT (dd) — Multi-purpose Disk Status routine. Logically assign disk drives to operate with any combination of single density, double density, single side, double side, as well as standard or sequential disk sectoring. An optional selection allows fast stepping and optimal sectoring to significantly reduce disk-intensive program execution time.
An additional feature permits system reconfiguration to quad capacity. This allows double density owners to upgrade with no additional software expense.

COPY (dd) — Diskette duplication and verification.

XSUB (dr) — Extends the power of SUBMIT to include automatic line input to programs.

FORMAT (dd) — Prepare diskette for use with CP/M 2.2.

FOLLOWING SOFTWARE AVAILABLE IN MOST 5.25 AND 8 INCH FORMATS

MAC — 8080 Macro assembler. Z80 instruction library included. Symbol table, an array of output options ..... $85/$15

DESPOOL — Simultaneous file print and user operation ..... $45/$5

TEX — Text formatter. Quality hard copy ..... $70/$15

SID — Symbolic Instruction debugger. Multiple pass points, back track, histogram, source code labels ..... $85/$15

ZSID — Same as SID for the Z80 instruction set ..... $95/$15

COMPILER SYSTEMS CBASIC-2 rel 2.06
Compiler extended disk BASIC. Self documenting, source code protection, line numbers not required ..... $95/$15

California residents add 6% sales tax.
Specify single, double or quad capacity.
Additional formats available soon.
Structured Systems Group programs require CP/M and CBASIC-2.
*CP/M is a registered trademark of Digital Research.
†Software and documentation/documentation only.
Customizing for Non-standard Systems Extra
Shipping $2.00 C.O.D. $2.00

MT microSYSTEMS PASCAL/MT. — requires 32K minimum memory. Symbolic debugger, BCD or floating point. Optimized for the CP/M environment. Produces compact machine code ..... $250/$25

STRUCTURED SYSTEMS (requires CBASIC-2)

GENERAL LEDGER	$895/$25
INVENTORY	$795/$25
ACCOUNTS PAYABLE	$695/$25
ACCOUNTS RECEIVABLE	$695/$25
PAYROLL	$695/$25
ANALYST	$225/$20
LETTERIGHT	$175/$20
QSORT	$95/$10
NAD	$75/$10

SHUGART HARD DISK 6 mo. warranty, direct connection to North Star.
13.2 MBYTE $4595
26.4 MBYTE $4995

LINE PRINTER — multi-font, multi-language, up to 132 col, self test, bold face, 125 cps, much more $795

VERBATIM mini-disks (lots of 10) $24.95

DATADISK SYSTEMS, P.O. BOX 195, POWAY, CA 92064, (714) 578-3831

primitives for a color raster-scan display. The graphics primitives are summarized in table 2. Note that this list does not include primitive instructions for operations such as circle or arc generation. Such features can be generated by existing primitives (using the vector-drawing primitive). Furthermore, circle and arc primitives are difficult to generalize and cannot easily support any more complex curves: their utility is therefore very limited for the cost of their implementation in terms of support hardware and display-processor software. Furthermore, features such as transformations are not included at this level since they presuppose a definite image structure that cannot be known by the display processor. Other

Text continued on page 292

Listing 1: *This arrangement of primitives developed for Micrograph was used to produce the images in figure 5.*

```
MOV   20,10                (T)
VEC   SHORT,REL,WHITE,20,30
MOV   5,30                 (T)
VEC   SHORT,REL,WHITE,25,30
MOV   30,10                (E)
VEC   SHORT,REL,WHITE,30,20
MOV   30,10                (E)
VEC   SHORT,REL,WHITE,40,10
MOV   30,15                (E)
VEC   SHORT,REL,WHITE,40,15
MOV   30,20                (E)
VEC   SHORT,REL,WHITE,40,20
MOV   50,10                (X)
VEC   SHORT,REL,WHITE,60,20
MOV   50,20                (X)
VEC   SHORT,REL,WHITE,60,10
MOV   70,10                (T)
VEC   SHORT,REL,WHITE,70,15
MOV   65,15                (T)
VEC   SHORT,REL,WHITE,75,15
LREG  VPORT,30,45,40,60    (rectangle
      around circle)
LPIX  VPORT,CYAN0..CYAN149
LREG  VPORT,120,60,200,120 (part of
      cube)
LPIX  VPORT,BLUE
LREG  VPORT,170,170,250,230 (part of
      cube)
LPIX  VPORT,RED
MOV   120,60
VEC   SHORT,REL,GREEN,170,170 (part
      of cube)
MOV   200,120
VEC   SHORT,REL,GREEN,250,230 (part
      of cube)
MOV   200,60
VEC   SHORT,REL,GREEN,250,230 (part
      of cube)
MOV   120,120
VEC   SHORT,REL,GREEN,170,250 (part
      of cube)
MOV   20,200
SYM   4,α,β,Σ,λ            (from user-defined
      font)
```

5 types of primitives, 37 instructions, 300 parameters


Circle 178 on inquiry card.

NECOMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE™

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

EVERYTHING

* APPLE IS A TRADEMARK OF THE APPLE CORP.

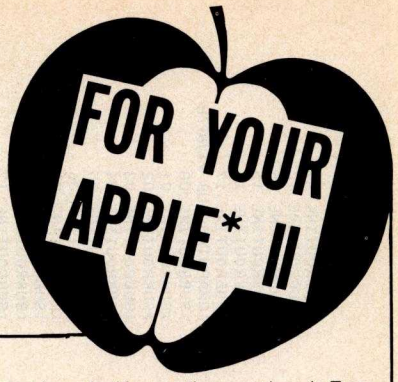

★ *All orders processed within 24-Hours*
★ *30-Day money back guarantee on all Software (less a $3 penalty for handling)*

FROM COMPUMAX BUSINESS SYSTEMS

The COMPUMAX business applications programs are written with the novice computer user in mind. They are easy to use, yet powerful in their capabilities. Further, COMPUMAX supplies the BASIC source code. Thus the programs are easy to modify.

MICROLEDGER

This General Ledger system performs the essential functions of dual entry bookkeeping and matches revenues and expenses:
MICROLEDGER includes the following programs.:
LEDGER 1 - builds and maintains the CHART OF ACCOUNTS file. This file contains both current and accumulated totals for each account.
LEDGER 2 - builds and updates the JOURNAL TRANSACTION file.
LEDGER 3 - lists both the the JOURNAL file and the CHART OF ACCOUNTS.
LEDGER 4 - computes the TRIAL BALANCE and executes POSTING of journal transactions into the CHART OF ACCOUNTS. An AUDIT TRIAL of all transaction is output.
LEDGER 5 - produces the PROFIT AND LOSS STATEMENT.
LEDGER 6 - produces the BALANCE SHEET. Assets, liabilities and owners' equities are shown by account and by totals. **$140.00**

MICROPAY

An Accounts Payable system, MICROPAY includes the following program & functions:
PAY 1 - initializes both Transaction and Master files, then begins the Accounts Payable process by inputting and adding records in the Transaction file.
PAY 2 - allows for changes and deletions of Transaction and Master records.
PAY 3 - reports outstanding Accounts Payables in four categories; under 30 days, 31-60 days, 61-90 days, and over 90 days.
PAY 4 - reports all outstanding Accounts Payables for a single customer or for all customers, and computes Cash Requirements.
PAY 5 - reports all outstanding Accounts Payables for a single date or for a range of dates and computes the Cash Requirements.
PAY 6 - lists both the Transactions and Master files.
PAY 7 - prints checks and accumulates and journalizes Accounts Payables. This program simultaneously creates entries for the MICROLEDGER file. **$140.00**

MICROREC

An Accounts Receivable system, MICROREC includes the following programs and functions:
REC 1 - initializes Accounts Receivable files, adds A/R record and prints invoices.
REC 2 - accepts receipt of customer payments and changes or deletions of A/R Transaction or Master file records.
REC 3 - reports outstanding Accounts Receivables in four categories; under 30 days, 31-60 days, 61-90days, and over 90 days.
REC 4 - reports all outstanding Accounts Receivables for a single customer, or for all customers and computes Cash Projections.
REC 5 - produces reports for all outstanding Accounts Receivables for a single date or for a range of dates and computes Cash projections.
REC 6 - lists Transaction and Master files and accumulates and journalizes Accounts Receivables, creating JOURNAL entries which communicate with the MICROLEDGER JOURNAL file. **$140.00**

MICROINV

This Inventory Control system presents a general method of Inventory Control and produces several important reports. Its program includes:
INV 1 - initializes Transaction and Master files and adds and updates Transaction and Master records.
INV 2 - handles inventory issued or received, creating inventory records. This program also accumulates and journalizes transactions, producing JOURNAL entries which communicate with the MICROLEDGER file.
INV 3 - lists both Transaction and Master files.
INV 4 - produces the STOCK STATUS REPORT, showing the standard inventory stock data and stock valuation, and the ABC ANALYSIS breaking down the inventory into groups by frequency of usage.
INV 5 - gives a JOB COST REPORT/MATERIALS, showing allocation of materials used year-to-date by each job or work code. (This is complemented by the Job Cost Report/Personnel in the MICROPERS program.)
INV 6 - computes and provides the E.O.Q. (Economic Order Quantities) **$140.00**

MICROPERS

This is a Payroll/Personnel program whose functions include:
PERS 1 - initializes the Master file and allows for entry and updates of Master records.
PERS 2 - initializes the Payroll file and allows for entry and updates of payroll records.
PERS 3 - lists an Employee Master Record or the entire Employee Master file; lists a single Payroll Record or the entire Payroll file.
PERS 4 - computes Payroll and prints the PAYROLL REGISTER. Prints PAYCHECKS and creates JOURNAL entries to be fed into the MICROLEDGER JOURNAL file.
PERS 5 - produces the JOB COST REPORT/PERSONNEL, computes the quarterly 941 bank deposit, and the Annual W-2 run. **$140.00**

All COMPUMAX programs available in machine readable format (diskette form) for the following machines:

TRS-80™ Model I	Micropolis 1053/11
APPLE II	Microsoft under CP/M
PET	CBASIC under CP/M
	Cromemco

FROM ADVENTURE INTERNATIONAL (By Scott Adams)

† 1. **ADVENTURELAND** - You wander through an enchanted world trying to recover the 13 lost treasures. You'll encounter wild animals, magical beings, and many other perils and puzzles. Can you rescue the Blue Ox from the quicksand? Or find your way out of the maze of pits? Happy Adventuring .....

† 2. **PIRATE'S ADVENTURE** - "Yo ho ho and a bottle of rum" You'll meet up with the pirate and his daffy bird along with many strange sights as you attempt to go from your London flat to Treasure Island. Can you recover Long John Silver's lost treasures? Happy Sailing, matey .....

3. **MISSION IMPOSSIBLE ADVENTURE** - Good morning, your mission is to...and so it starts. Will you be able to complete your mission in time? Or is the world's first automated nuclear reactor doomed? This one's well named. It's hard, there is no magic, but plenty of suspense. Good luck .....

4. **VOODOO CASTLE** - Count Cristo has had a flendish curse put on him by his enemies. There he lies, with you his only hope. Will you be able to rescue him or is he forever doomed? Beware the Voodoo Man .....

5. **THE COUNT** - You wake up in a large brass bed in a castle somewhere in Transylvani. Who are you, what are you doing here, and WHY did the postman deliver a bottle of blood? You'll love this Adventure, in fact, you might say it's Love at First Byte .....

6. **STRANGE ODYSSEY** - Marooned at the edge of the galaxy, you've stumbled on the ruins of an ancient alien civilization complete with fabulous treasures and unearthly technologies. Can you collect the treasures and return or will you end up marooned forever? .....

7. **MYSTERY FUN HOUSE** - Can you find your way completely through the strangest Fun House in existence, or will you always be kicked out when the park closes? ...

8. **PYRAMID OF DOOM** - An Egyptian Treasure Hunt leads you into the dark recesses of a recently uncovered Pyramid. Will you recover all the treasures or more likely will you join its denizens for that long eternal sleep? .....

9. **GHOST TOWN** - Explore a deserted western mining town in search of 13 treasures From rattlesnakes to runaway horses, this Adventure's got them all! Just remember, Pardner, they don't call them Ghost Towns for nothin'. (Also includes new bonus scoring system!) ..... **$14.95 Per Adventure**

*** Note:** Apple requires 24K and has no lower case.
† Recommended for the novice adventurer, with many built-in HELPS!

FROM PERSONAL SOFTWARE INC.

VISICALC **$150.00**

Take virtually any problem you would explore using calculator, pen, and paper, working in rows and columns. Apply VisiCalc and you'll see why every reviewer of this product has said the same thing: VisiCalc is the most useful, most important program yet developed for personal computing.

With VisiCalc, you work with an electronic worksheet of up to 63 columns and 254 rows. At the juncture of any column and row you can type in words and numbers. VisiCalc automatically performs all arithmetic functions, net present value, and transcendental functions - instantly!

CCA DATA MANAGEMENT SYSTEM $74.95

DMS Features:
File Creaton and Maintenance:
- Fields may be alphanumeric, numeric, integer, floating point, or fixed decimal with commas.
- Fields may be COMPUTED FIELDS. DMS will compute any field within a record, using constants or other fields in the same record. Functions include add, subtract, multiply, divide, and raise exponential powers.
- Records are easily located, using the SCAN feature. SCAN for records with a field over, below, or between a range of values.
- Records are easily added and updated. DMS "prompts" you with questions.
- Multi-diskette capabilities for larger files - up to 85,000 characters per file!
- Sort the records into almost any order, using up to 10 fields as "keys". So you can sort for customer numbers; within zip code, for instance.
- Delete records, "compact" files, and backup files on data diskettes easily.

Report Features:
- Print reports with records in any order.
- Select fields to be printed.
- Print mailing labels.
- Numeric totals and subtotals can be specified when a value in an unrelated field in the same record changes. For example, sort, subtotal, and print according to department, or month, or customer number, or model number.

GUARANTEED PROFIT **91%** **WINS PLACES SHOWS** **32%** **AVERAGE PROFIT AT ALL TRACKS-1978**

THE HORSE SELECTOR II (FLATS) (By Dr. Hal Davis) $50.00

New simplified version of the original Horse Selector. The first Horse Selection System to actually calculate the estimated odds of each horse.
HIGHER PROFITS (OVER 100%) POSSIBLE THROUGH SELECTIVE BETTING ON:
- Rates each horse in 10 seconds.
- Easy to follow rules.
- Can be used with any Apple II Computer.
- 100% money back guarantee (returned for any reason).
- Uses 4 factors (speed rating, track variant, distance of the present race, distance of the last race)
- Using the above factors, the Horse Selector calculates the estimated odds. BET on horses whose actual payoff (from the Tote Board or Morning Lines) is higher than payoff based on estimated odds.
- Using the above factors, the Horse Selector calculates the estimated odds. BET on any selected horse with an estimated payoff (based on Tote Board or Morning Lines) higher than calculated payoff (based on Horse Selector II).
- Source listing for the TRS-80™, TI-59, HP-67, HP-41, Apple and BASIC Computers.
- No computer or calculator necessary (although a calculator would be helpful for the simple division used to calculate estimated odds)

FREE Dutching Tables allows betting on 2 or more horses with a guaranteed profit.

master charge

24 HOUR ORDER LINE

VISA

(914) 425-1535

ADD $2.00 FOR SHIPPING UPS AREAS
ADD $3.00 FOR C.O.D. OR NON-UPS AREAS
ADD $4.00 OUTSIDE U.S.A, CANADA & MEXICO

NEW TOLL-FREE ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

Circle 179 on inquiry card.

Listing 2: *The first third of the firmware for Micrograph control, written for the Z80 microprocessor used in the prototype. The remaining portions of the firmware will be included in the next two issues of BYTE, along with hardware construction details (Part 2, December 1980 BYTE), and software (Part 3, January 1981 BYTE).*

```
                        1  ;H MICROGRAPH FIRMWARE SYSTEM 1
                        2  ;P 62
                        3  ;
                        4  ; MICROGRAPH 1.0 ************************************
                        5  ;
                        6  ; DEVELOPED BY GRADY BOOCH
                        7  ;
                        8  ; MICROGRAPH IS A FIRMWARE CONTROLLED MICROPROCESSOR
                        9  ; BASED COLOR GRAPHICS DISPLAY SYSTEM, BUILT AS A
                       10  ; SINGLE BOARD DISPLAY PROCESSOR, WHICH INTERFACES
                       11  ; TO A STANDARD UNMODIFIED COLOR TELEVISION. THE USER
                       12  ; SEES MICROGRAPH AS A 256 X 256 PIXEL SYSTEM, 8 BITS
                       13  ; PER PIXEL. THIS SYSTEM IS MAPPED TO AN EQUAL OR LOWER
                       14  ; RESOLUTION DISPLAY. GRAPHICS PRIMITIVES ARE AVAILABLE
                       15  ; TO ALLOW THE USER TO CREATE GRAPHICS DISPLAYS.
                       16  ; MICROGRAPH INTERFACES TO A HOST COMPUTER VIA THREE
                       17  ; 8 BIT I/O PORTS. FURTHER INFORMATION IS AVAILABLE
                       18  ; IN THE MICROGRAPH REFERENCE MANUAL.
                       19  ;
0000                   20          ORG  0                  ;START AT ADDRESS 0
0000   F3              21  MICROG: DI                       ;DISABLE INTERRUPTS
0001   C38E00          22          JP   MAIN               ;JUMP TO MAIN
                       23  ;
                       24  ;*****************************************************
                       25  ;GLOBAL DEFINITIONS, CONSTANTS AND STRUCTURES**********
                       26  ;*****************************************************
                       27  ;
                       28  ; STRUCTURES ******************************************
                       29  ;
                       30  ; STRUCTURES PROVIDES STORAGE FOR ALL FIRMWARE
                       31  ; VARIABLES AND STRUCTURES. DEFAULT VALUES ARE PROVIDED
                       32  ; IN THIS SECTION, WHICH IS STORED IN EPROM. STRUCTURES
                       33  ; ARE MOVED TO RAM DURING INITIALIZATION, AND REFERENCED
                       34  ; VIA THE OFFSETS DESCRIBED IN DEFINITIONS. NOTE THAT
                       35  ; THE FIRST SEVERAL BYTES OF RAM ARE RESERVED FOR THE
                       36  ; GRAPHICS AND MICROPROCESSOR STACKS.
                       37  ;
                       38  ESTRUCT:EQU  $                  ;START OF STRUCTURES
                       39  EGDR:   EQU  $                  ;GRAPHICS DISPLAY REG
0004   00              40  EGDR0:  DEFB 0                  ;X
0005   00              41  EGDR1:  DEFB 0                  ;Y
0006   FF              42  EGDR2:  DEFB 255                ;PRIMARY COLOR
0007   00              43  EGDR3:  DEFB 0                  ;SECONDARY COLOR
0008   00              44  EGDR4:  DEFB 0                  ;FRAME COUNT
0009   02              45  EGDR5:  DEFB 00000010B          ;VECTOR MODE
000A   00              46  EGDR6:  DEFB 0                  ;VIEWPORT 0 LEFT X
000B   00              47  EGDR7:  DEFB 0                  ;VIEWPORT 0 LEFT Y
000C   FF              48  EGDR8:  DEFB 255                ;VIEWPORT 0 RIGHT X
000D   FF              49  EGDR9:  DEFB 255                ;VIEWPORT 0 RIGHT Y
000E   00              50  EGDR10: DEFB 0                  ;VIEWPORT 1 LEFT X
000F   00              51  EGDR11: DEFB 0                  ;VIEWPORT 1 LEFT Y
0010   FF              52  EGDR12: DEFB 255                ;VIEWPORT 1 RIGHT X
0011   FF              53  EGDR13: DEFB 255                ;VIEWPORT 1 RIGHT Y
0012   08              54  EGDR14: DEFB 00001000B          ;DISPLAY FORMAT
0013   80              55  EGDR15: DEFB 10000000B          ;STATUS
                       56  ESLINK: EQU  $                  ;GRAPHICS SUB LINKAGE
0014   A50A            57  EL00:   DEFW USER               ;SUBROUTINE 00
0016   A50A            58  EL01:   DEFW USER               ;SUBROUTINE 01
0018   A50A            59  EL02:   DEFW USER               ;SUBROUTINE 02
001A   A50A            60  EL03:   DEFW USER               ;SUBROUTINE 03
001C   A50A            61  EL04:   DEFW USER               ;SUBROUTINE 04
001E   A50A            62  EL05:   DEFW USER               ;SUBROUTINE 05
0020   A50A            63  EL06:   DEFW USER               ;SUBROUTINE 06
0022   A50A            64  EL07:   DEFW USER               ;SUBROUTINE 07
0024   A308            65  EL10:   DEFW GUSER              ;SUBROUTINE 10
0026   A308            66  EL11:   DEFW GUSER              ;SUBROUTINE 11
0028   A308            67  EL12:   DEFW GUSER              ;SUBROUTINE 12
002A   A308            68  EL13:   DEFW GUSER              ;SUBROUTINE 13
002C   A308            69  EL14:   DEFW GUSER              ;SUBROUTINE 14
002E   A308            70  EL15:   DEFW GUSER              ;SUBROUTINE 15
0030   A308            71  EL16:   DEFW GUSER              ;SUBROUTINE 16
0032   A308            72  EL17:   DEFW GUSER              ;SUBROUTINE 17
                       73  ESLONG: EQU  $                  ;GRAPHICS SUB LENGTH
0034   01              74  ES00:   DEFB 1                  ;SUBROUTINE 00
0035   01              75  ES01:   DEFB 1                  ;SUBROUTINE 01
0036   01              76  ES02:   DEFB 1                  ;SUBROUTINE 02
0037   01              77  ES03:   DEFB 1                  ;SUBROUTINE 03
0038   01              78  ES04:   DEFB 1                  ;SUBROUTINE 04
0039   01              79  ES05:   DEFB 1                  ;SUBROUTINE 05
003A   01              80  ES06:   DEFB 1                  ;SUBROUTINE 06
003B   01              81  ES07:   DEFB 1                  ;SUBROUTINE 07
003C   01              82  ES10:   DEFB 1                  ;SUBROUTINE 10
003D   01              83  ES11:   DEFB 1                  ;SUBROUTINE 11
003E   01              84  ES12:   DEFB 1                  ;SUBROUTINE 12
003F   01              85  ES13:   DEFB 1                  ;SUBROUTINE 13
0040   01              86  ES14:   DEFB 1                  ;SUBROUTINE 14
0041   01              87  ES15:   DEFB 1                  ;SUBROUTINE 15
0042   01              88  ES16:   DEFB 1                  ;SUBROUTINE 16
0043   01              89  ES17:   DEFB 1                  ;SUBROUTINE 17
0044   00              90  ESPTR:  DEFB 0                  ;GRAPHICS SUB POINTER
0045   00              91  ESOFF:  DEFB 0                  ;GRAPHICS SUB OFFSET
0046   00              92  EGPC:   DEFB 0                  ;GRAPHICS STACK POINTER
0047   00              93  EREF:   DEFB 0                  ;CURRENT VIEWPORT REFERENCE
0048   00              94  EM:     DEFB 0                  ;VECTOR DRAWING TEMP
0049   00              95  EMM:    DEFB 0                  ;VECTOR DRAWING TEMP
004A   00              96  EMN:    DEFB 0                  ;VECTOR DRAWING TEMP
004B   00              97  ESX:    DEFB 0                  ;VECTOR DRAWING TEMP
004C   00              98  ESY:    DEFB 0                  ;VECTOR DRAWING TEMP
004D   00              99  ECOLOR: DEFB 0                  ;VECTOR COLOR STORAGE
004E   0000           100  EXERRT: DEFW 0                  ;ERROR SERVICE TEMP
0050   C9             101  ENULL:  DEFB 11001001B          ;FRAME SERVICE
                      102  ;
                      103  ; NON MASKABLE INTERRUPT TRAP **************************
                      104  ;
                      105  ; A TRAP TO THIS LOCATION IN MEMORY OCCURS UPON RECEIPT
                      106  ; OF A NON MASKABLE INTERRUPT. THIS SECTION FORCES A
                      107  ; JUMP TO THE ERROR SERVICE ROUTINE, XERR.
                      108  ;
0066                  109  NMINT:  ORG     102             ;LOCATION OF INTERRUPT
0066   1834           110          JR      XERR            ;JUMP TO ERROR SERVICE
                      111  ;
                      112  ; CONSTANTS ********************************************
                      113  ;
                      114  ; CONSTANTS PROVIDES STORAGE FOR ALL FIRMWARE CONSTANTS
                      115  ; WHICH ARE STORED IN EPROM.
                      116  ;
                      117  CONST:  EQU  $                  ;START OF CONSTANTS
                      118  IVECT:  EQU  $                  ;START OF INTERRUPT VEC
0068   4601           119  INT0:   DEFW FRAME              ;FRAME SERVICE
006A   6801           120  INT1:   DEFW INPUT              ;INPUT SERVICE
006C   7601           121  INT2:   DEFW OUTPUT             ;OUTPUT SERVICE
                      122  PENTER: EQU  $                  ;PRIMITIVE ENTRY POINTS
006E   6F02           123          DEFW CALLS              ;CALLS ENTRY
0070   AB02           124          DEFW LCRAM              ;LCRAM ENTRY
0072   1403           125          DEFW LPIX               ;LPIX ENTRY
0074   8703           126          DEFW LREG               ;LREG ENTRY
0076   9F03           127          DEFW LSUB               ;LSUB ENTRY
0078   CB03           128          DEFW LSYM               ;LSYM ENTRY
007A   FB03           129          DEFW MOV                ;MOV ENTRY
007C   8504           130          DEFW RCRAM              ;RCRAM ENTRY
007E   EE04           131          DEFW RETN               ;RETN ENTRY
0080   0E05           132          DEFW RPIX               ;RPIX ENTRY
0082   5705           133          DEFW RREG               ;RREG ENTRY
0084   6505           134          DEFW RSUB               ;RSUB ENTRY
0086   8705           135          DEFW RSYM               ;RSYM ENTRY
0088   BB05           136          DEFW SYM                ;SYM ENTRY
008A   4606           137          DEFW VEC                ;VEC ENTRY
008C   8807           138          DEFW WAIT               ;WAIT ENTRY
                      139
```

Listing 2 continued on page 282

YOUR MODEL II CAN HAVE SNAPP!

SNAPP II EXTENDED BASIC

A family of enhancements to the Model II BASIC interpreter. Part of the package originated with the best of APPARAT, INC.'s thoughts in implementing NEWDOS BASIC. The system is written entirely in machine language for SUPER FAST execution. The extensions are fully integrated into Model II BASIC, and require NO user memory, and NO user disk space. The package is made up of the following five modules, each of which may be purchased separately:

XBASIC - Six single keystroke commands to list the first, last, previous, next, or current program line, or to edit the current line. Ten single character abbreviations for frequently used commands: AUTO, CLS, DELETE, EDIT, KILL, LIST, MERGE, NEW, LLIST, and SYSTEM. $25

XREF - A powerful cross-reference facility with output to display and/or printer. Trace a variable through the code. Determine easily if a variable is in use. $40

XDUMP - Permits the programmer to display and/or print the value of any or all program variables. Identifies the variable type for all variables. Each element of any array is listed separately. $40

XRENUM - An enhanced program line renumbering facility which allows specification of an upper limit of the block of lines to be renumbered, supports relocation of renumbered blocks of code, and supports duplication of blocks of code. $40

XFIND - Permits quick and easy location of specified strings or keywords within the program text. $30

SAVE - on the purchase of the entire package. $140

CONVERT

This remarkable utility converts "V" format files (the sequential format used by the SHACKS, COBAL and BASIC Compilers) to the "F" format files (the sequential file format used by the BASIC interpreter and BASCOM), and vice versa. Without this product, programs written for the interpreter will have to be RE-KEYED to be used by the SHACKS Compiler BASIC. $75.00

SKRUNCH

A SUPER FAST TRSDOS UTILITY. Compresses your BASIC programs to an absolute minimum. Typically saves 30-40% space, even for programs without REM statements! Also results in 7-10% improvement in execution speed. $35

SBASIC — Model I and Model II

Program in a high-level, full structured BASIC! The BEST of the BASIC pre-processors. PERFORM named subroutines. CONDITIONAL case structures. WHILE loops. UNTIL loops. And much more. Forget about line numbers. Model II version is compiled, and SUPER FAST. From Ultimate Computer Systems Model I $50 Model II $75

DOSFIX

A collection of patches to TRSDOS and BASIC to enhance their usability and function includes our well-known BREAK7E patches to keep the break key from being used accidentally. FREE WITH ANY MODEL II SOFTWARE PACKAGE.

FRIEND

FOUR NEW TRSDOS COMMANDS!

SHOW — A much better multi-disk directory display. Let's you see only those files you want, and includes date of last update.

MOVE - A much better file copying command. Copy/Move whole groups of files, renaming them at the same time, if desired, with just 1 command!

ERASE - Better than KILL, better than PURGE.

PRINT - Print BASIC programs from disk, whether saved in ASCII or compressed.

All 4 DOS commands allow fast processing of one, or complete groups of files, based on generic naming and wild card specifications. Enhanced functions too numerous to fully describe here.

EXAMPLES:

SHOW PAY*/BAS*

Directory display of all '/BAS' files on all diskettes which begin with 'PAY.'

MOVE PAY*/BAS:1 TO =/OLD:3

Save current versions of payroll programs to drive 3, changing extensions to '/OLD.'

MOVE OLD*/* TO NEW =/= :1

Copy all files on drive 0 which begin with 'OLD,' regardless of extension, to drive 1, changing the first 3 letters of the filename to 'NEW,' but retaining the same file extension.

Save time!

Reduce frustration!

Eliminate ERROR 33! $75

HOSTII / TERMII

Allows 'remote control' of a Model II from another Model II, or any ASCII terminal. If terminal is a Model II, accurate screen positioning (PRINT @) is fully supported! Requires NO user memory! This system is designed to provide software support to our customer locations without ever leaving the office. $50

BUGZAP

A powerful utility oriented toward the machine language programmer. Display/Modify/Print/Memory/Disk sectors. Use this to help you learn more about the internals of the Model II. $50

SNAPP, INC.

8160 Corporate Park Dr.
Cincinnati, Ohio 45242

Ohio residents call collect
(513) 891-4496

VISA master charge

Call Toll Free
1 - 800 - 543-4628

Most products will soon be available for the Model I. CALL FOR DETAILS!

MASTER / SLAVE

This software package was designed to support the transferring of files from one Model II to another, via direct connection or modem/phone line connection. ALL kinds of files, and baud rates up to 9600 are fully supported. Transfer files in either direction, even with the SLAVE Model II UNATTENDED! $150

SPOOLER — Model I and Model II

Our workhorse! This package, available for Model I, in the TRSDOS/NEWDOS or NEWDOS 80 versions, or for the Model II, greatly enhances system performance when running typical business applications. Many applications have been benchmarked to run nearly TWICE AS FAST with the SPOOLER installed. Installs in minutes, and no changes are required to your programs. Preferred Model II versions require NO user memory. Optional features for the Model II version only: Serial printer support, and DISK SPOOLING support. The DISK SPOOLING support is particularly recommended for word processing applications. $100

SERIAL PRINTER OPTION $50
DISK SPOOLING OPTION $50

ROUTE

Causes LPRINT data to be sent to the video screen! A great help in writing and debugging programs when no printer is available, you have a slow printer, or you are just in a hurry. Can be turned on and off from within your BASIC program. Requires NO user memory. $25

SCREEN

Supports the copying of the full video screen to the printer. Can be invoked by the operator with a keystroke, or from your program with a USR call. Requires NO user memory. $25

SAVE

Retrieve the resident BASIC program following an accidental SYSTEM, or a system crash. DON'T BE WITHOUT THIS ONE. YOU NEVER KNOW WHEN YOU WILL NEED IT! $35

TERMS OF SALE:

Credit card customers, add 3%. C.O.D. customers add $3. Ohio residents add 4½% sales tax. Shipments normally made the same day we receive your order.

OUR GUARANTEE:

If your diskette arrives damaged, we will replace it without charge. If you ever accidentally damage it, we will replace it for a $10 handling charge. For a period of one year, we will provide you with any enhancements or updates for a $10 handling charge. For a period of one year, if errors are discovered in the programs, they will be corrected without charge. In the event we cannot correct an error, you may return the program material for a refund.

TRS-80 is a trademark of the Radio Shack division of Tandy Corporation.
NEWDOS and NEWDOS/80 are trademarks of Apparat, Inc.

Circle 180 on inquiry card.

Listing 2 continued:

```
                ; DEFINITIONS ***************************************
                ;
                ; DEFINITIONS PROVIDES GLOBAL DEFINITIONS OF VARIOUS
                ; STRUCTURES AND VARIABLES.
                ;
DEFIN:  EQU     $                       ;START OF DEFIN
RESTART:EQU     0                       ;RESTART ADDRESS
PBOTTM: EQU     4096                    ;BOTTOM OF PRIVATE RAM
MSTACK: EQU     PBOTTM+63               ;BOTTOM OF MICRO STACK
GSTACK: EQU     MSTACK+64               ;BOTTOM OF GRAPH STACK
STRUCT: EQU     GSTACK+1                ;START OF STRUCTURES
RELOC:  EQU     -ESTRUCT                ;RELOCATION CONSTANT
GDR:    EQU     RELOC+EGDR              ;GRAPHICS DISPLAY REG
GDR0:   EQU     RELOC+EGDR0             ;X
GDR1:   EQU     RELOC+EGDR1             ;Y
GDR2:   EQU     RELOC+EGDR2             ;PRIMARY COLOR
GDR3:   EQU     RELOC+EGDR3             ;SECONDARY COLOR
GDR4:   EQU     RELOC+EGDR4             ;FRAME COUNT
GDR5:   EQU     RELOC+EGDR5             ;VECTOR MODE
GDR6:   EQU     RELOC+EGDR6             ;VIEWPORT 0 LEFT X
GDR7:   EQU     RELOC+EGDR7             ;VIEWPORT 0 LEFT Y
GRD8:   EQU     RELOC+EGDR8             ;VIEWPORT 0 RIGHT X
GDR9:   EQU     RELOC+EGDR9             ;VIEWPORT 0 RIGHT Y
GDR10:  EQU     RELOC+EGDR10            ;VIEWPORT 1 LEFT X
GBR11:  EQU     RELOC+EGDR11            ;VIEWPORT 1 LEFT Y
GDR12:  EQU     RELOC+EGDR12            ;VIEWPORT 1 RIGHT X
GDR13:  EQU     RELOC+EGDR13            ;VIEWPORT 1 RIGHT Y
GDR14:  EQU     RELOC+EGDR14            ;DISPLAY FORMAT
GDR15:  EQU     RELOC+EGDR15            ;STATUS
SLINK:  EQU     RELOC+ESLINK            ;GRAPHICS SUB LINKAGE
L00:    EQU     RELOC+EL00              ;SUBROUTINE 00
L01:    EQU     RELOC+EL01              ;SUBROUTINE 01
L02:    EQU     RELOC+EL02              ;SUBROUTINE 02
L03:    EQU     RELOC+EL03              ;SUBROUTINE 03
L04:    EQU     RELOC+EL04              ;SUBROUTINE 04
L05:    EQU     RELOC+EL05              ;SUBROUTINE 05
L06:    EQU     RELOC+EL06              ;SUBROUTINE 06
L07:    EQU     RELOC+EL07              ;SUBROUTINE 07
L10:    EQU     RELOC+EL10              ;SUBROUTINE 10
L11:    EQU     RELOC+EL11              ;SUBROUTINE 11
L12:    EQU     RELOC+EL12              ;SUBROUTINE 12
L13:    EQU     RELOC+EL13              ;SUBROUTINE 13
L14:    EQU     RELOC+EL14              ;SUBROUTINE 14
L15:    EQU     RELOC+EL15              ;SUBROUTINE 15
L16:    EQU     RELOC+EL16              ;SUBROUTINE 16
L17:    EQU     RELOC+EL17              ;SUBROUTINE 17
SLONG:  EQU     RELOC+ESLONG            ;GRAPHICS SUB LENGTH
S00:    EQU     RELOC+ES00              ;SUBROUTINE 00
S01:    EQU     RELOC+ES01              ;SUBROUTINE 01
S02:    EQU     RELOC+ES02              ;SUBROUTINE 02
S03:    EQU     RELOC+ES03              ;SUBROUTINE 03
S04:    EQU     RELOC+ES04              ;SUBROUTINE 04
S05:    EQU     RELOC+ES05              ;SUBROUTINE 05
S06:    EQU     RELOC+ES06              ;SUBROUTINE 06
S07:    EQU     RELOC+ES07              ;SUBROUTINE 07
S10:    EQU     RELOC+ES10              ;SUBROUTINE 10
S11:    EQU     RELOC+ES11              ;SUBROUTINE 11
S12:    EQU     RELOC+ES12              ;SUBROUTINE 12
S13:    EQU     RELOC+ES13              ;SUBROUTINE 13
S14:    EQU     RELOC+ES14              ;SUBROUTINE 14
S15:    EQU     RELOC+ES15              ;SUBROUTINE 15
S16:    EQU     RELOC+ES16              ;SUBROUTINE 16
S17:    EQU     RELOC+ES17              ;SUBROUTINE 17
SPTR:   EQU     RELOC+ESPTR             ;GRAPHICS SUB POINTER
SOFF:   EQU     RELOC+ESOFF             ;GRAPHICS SUB OFFSET
GPC:    EQU     RELOC+EGPC              ;GRAPHICS STACK POINTER
REF:    EQU     RELOC+EREF              ;CURRENT VIEWPORT REF
M:      EQU     RELOC+EM                ;VECTOR DRAWING TEMP
MM:     EQU     RELOC+EMM               ;VECTOR DRAWING TEMP
MN:     EQU     RELOC+EMN               ;VECTOR DRAWING TEMP
SX:     EQU     RELOC+ESX               ;VECTOR DRAWING TEMP
SY:     EQU     RELOC+ESY               ;VECTOR DRAWING TEMP
COLOR:  EQU     RELOC+ECOLOR            ;VECTOR COLOR STORAGE
XERRT:  EQU     RELOC+LXERRT            ;ERROR SERVICE TEMP
NULL:   EQU     RELOC+ENULL             ;FRAME SERVICE
FREE:   EQU     STRUCT+NULL+1           ;START OF FREE RAM
SYMTAB: EQU     5120                    ;START OF SYMBOL TABLE
PTOP:   EQU     6143                    ;TOP OF PRIVATE RAM
CR0:    EQU     7168                    ;COLOR RAM 0
CR1:    EQU     7184                    ;COLOR RAM 1
CR2:    EQU     7200                    ;COLOR RAM 2
RBOTTOM:EQU     8192                    ;START OF REFRESH RAM
RTOP:   EQU     14335                   ;REFRESH TOP SYSTEM I
                ;
                ;*****************************************************
                ;MAIN PROGRAM BLOCK*******************************
                ;*****************************************************
                ;
                ; MAIN ************************************************
                ;
                ; MAIN IS THE DRIVER FOR MICROGRAPH. AFTER INITIALIZING
                ; SP, MAIN CALLS INIT, FETCH AND EXEC ARE CALLED IN
                ; TURN TO PROCESS THE GRAPHICS PRIMITIVES.
                ;
                ; CALLS         INIT
                ;               FETCH
                ;               EXEC
                ;
                ; CALLED BY     NOT APPLICABLE
                ;
                ; REGISTERS     SP      (STACK POINTER)
                ;
                ; I/O           NONE
                ;
                ; STRUCTURES    NONE
                ;
008E  313F10    MAIN:   LD   SP,MSTACK          ;INITIALIZE SP
0091  CD9401            CALL INIT               ;INITIALIZE THE SYSTEM
0094  CDED01    LOOP:   CALL FETCH              ;FETCH A PRIMITIVE
0097  CD3D02            CALL EXEC               ;EXECUTE A PRIMITIVE
009A  18F8              JR   LOOP               ;REPEAT INDEFINITELY
                ;
                ;*****************************************************
                ;INTERRUPT SERVICE ROUTINES***********************
                ;*****************************************************
                ;
                ; XERR ************************************************
                ;
                ; XERR SERVICES AN ERROR CONDITION. XERR IS CALLLD UPON
                ; A TRAP TO THE NON MASKABLE INTERRUPT VECTOR.
                ; XERR ALLOWS A SYSTEM RESET, REGISTER DUMP, OR MEMORY
                ; DUMP VIA THE DIAGNOSTIC DIRECTIVES.
                ;
                ; CALLS         SENDBY
                ;
                ; CALLED BY     NON MASKABLE INTERRUPT
                ;
                ; REGISTERS     A       (DUMP)
                ;               B       (DUMP)
                ;               C       (DUMP)
                ;               D       (DUMP)
                ;               E       (DUMP)
                ;               H       (DUMP)
                ;               L       (DUMP)
                ;               IX      (DUMP)
                ;               IY      (DUMP)
                ;               SP      (DUMP)
                ;
                ; I/O           PORT 2  (STATUS)
                ;               PORT 4  (INPUT)
                ;
                ; STRUCTURES    GDR15   (STATUS)
                ;
009C  FB        XERR:   EI                      ;ENABLE INTERRUPTS
009D  F5                PUSH AF                 ;SAVE A AND F
009E  DDCB0FC6          SET  0,(IX+GDR15)       ;SET ERROR
00A2  DDCB0FCE          SET  1,(IX+GDR15)       ;SET ERROR
00A6  DD7E0F            LD   A,(IX+GDR15)       ;GET THE STATUS
```

Listing 2 continued on page 284

INTRODUCING

6809 SOFTWARE POWER TOOLS

BY MICROWARE®

OS-9™ LEVEL TWO MULTIUSER OPERATING SYSTEM

True multitasking, multiuser OS for timesharing or real-time control applications.

■ Sophisticated memory management permits use of over one megabyte.

■ Versatile, easy-to-use input/output supports multiple devices.

■ UNIX™-like file structure including hierarchical directories, pipes, filters, and byte-addressable random access files.

■ Provides log-on password protection and user file security.

■ Can run on small, inexpensive systems with floppy disks and as little as 32K memory.

☐ $495.00*

OS-9™ LEVEL ONE OPERATING SYSTEM

A multitasking real-time operating system for software development, process control and smaller multi-user applications.

■ Versatile input/output system can support multiple devices using interrupt-driven, DMA, or program-controlled data transfer. Users can easily add additional I/O devices.

■ Tape or disk-based versions available.

■ Disk versions support UNIX™-like hierarchical directory structure and byte-addressable random-access files.

■ Memory management for single address-space (up to 64K).

☐ Disk version $150.00*

☐ Tape version $95.00

BASIC09™ PROGRAMMING LANGUAGE SYSTEM

Extended BASIC language compiler/interpreter with integrated text editor and debug package. Runs standard BASIC programs *or* minimally-modified PASCAL programs.

■ Permits multiple named program modules having local variables and identifiers. Modules are reentrant, position independent and ROMable.

■ Additional control statements for structured programming: IF ... THEN ... ELSE, FOR ... NEXT, REPEAT ... UNTIL, WHILE ... DO, LOOP ... ENDLOOP, EXITIF ... ENDEXIT.

■ Allows user-defined data types and complex data structures. Five built-in data types: byte, integer, 9 digit floating-point, string and boolean.

■ Outperforms any other BASIC on any 8-bit MPU.

■ Available on ROM, disk or cassette tape. Runs under OS-9™ Level One or Level Two.

☐ Disk or tape $195.00*

MICROSOFT 6809 BASIC

Standard Microsoft BASIC optimized for the 6809 and OS-9™.

■ Four data types: integer, string, single precision and double precision floating point.

■ Program trace and edit capabilities.

■ Automatic line numbering and renumbering.

■ Supports random and sequential file I/O. Full PRINT USING for formatted output.

☐ Disk or tape $250.00

OS-9™ TEXT EDITOR

Minimum-keystroke macro text editor useful for text preparation or interactive word processing.

■ User-defined macros with parameters permit virtually unlimited command expansion. Macros can be saved, loaded and edited.

■ Buffer, line and character oriented commands.

■ Search, change and extend operations.

■ Permits multiple input/output files.

☐ Disk or tape $75.00

☐ ROM set (2716) $90.00

OS-9™ INTERACTIVE ASSEMBLER

Compact Motorola compatible assembler for machine language program development.

■ Operates in "batch" mode *or* interactive line-by-line mode.

■ Facilities for generation of OS-9™ memory modules and system calls.

■ Formatted listings include syntax *and* context error checking.

■ Runs on OS-9™ Level One or Level Two.

☐ Disk or tape $75.00

☐ ROM set (2716) $90.00

OS-9™ INTERACTIVE DEBUGGER

Facilitates testing and debugging of machine- language programs.

■ Includes common "monitor" functions: memory examine/change, breakpoints, display/change registers, etc.

■ Calculator mode evaluates arithmetic expressions in hex, decimal or binary.

■ Access to system commands.

■ Available on ROM, disk or cassette tape.


☐ Disk or tape $35.00

☐ ROM (2716) $50.00

BASIC 09 is a trademark of Motorola. OS-9 is a trademark of Motorola and Microware®. UNIX is a trademark of Bell Telephone Laboratories.

Most software is available on ROM, diskette and tape in versions for many popular 6809 computers. Source listings and yearly maintenance/update service are sold separately for most programs.

***Specify manufacturer and type of CPU and I/O controllers. Contact Microware® for specific availability.**



MICROWARE®

Microware Systems Corp., Dept. B1
5835 Grand Avenue
Des Moines, Iowa 50304
(515) 279-8844

Circle 181 on inquiry card.

Listing 2 continued:


```
00A9  D302      288          OUT  (2),A              ;DISPLAY THE STATUS
00AB  DDCB0F66  289  XERR0: BIT  4,(IX+GDR15)       ;WAIT FOR DIRECTIVE
00AF  28FA      290          JR   Z,XERR0            ;JUMP UNTIL RECEIVED
00B1  DB04      291          IN   A,(4)              ;GET THE DATA
00B3  DDCB0FA6  292          RES  4,(IX+GDR15)       ;RESET THE STATUS
00B7  F5        293          PUSH AF                 ;SAVE A AND F
00B8  DD7E0F    294          LD   A,(IX+GDR15)       ;GET THE STATUS
00BB  D302      295          OUT  (2),A              ;OUTPUT THE STATUS
00BD  F1        296          POP  AF                 ;RESTORE A AND F
00BE  CB7F      297          BIT  7,A                ;TEST FOR RESET
00C0  C20000    298          JP   NZ,RESTART         ;RESTART IF SET
00C3  CB77      299          BIT  6,A                ;TEST FOR DIRECTIVE
00C5  204F      300          JR   NZ,XERR1           ;JUMP IF SET
00C7  F1        301          POP  AF                 ;RESTORE A AND F
00C8  F5        302          PUSH AF                 ;SAVE A COPY OF A AND F
00C9  CD910A    303          CALL SENDBY             ;SEND A
00CC  78        304          LD   A,B                ;GET B
00CD  CD910A    305          CALL SENDBY             ;SEND B
00D0  79        306          LD   A,C                ;GET C
00D1  CD910A    307          CALL SENDBY             ;SEND C
00D4  7A        308          LD   A,D                ;GET D
00D5  CD910A    309          CALL SENDBY             ;SEND D
00D8  7B        310          LD   A,E                ;GET E
00D9  CD910A    311          CALL SENDBY             ;SEND E
00DC  7C        312          LD   A,H                ;GET H
00DD  CD910A    313          CALL SENDBY             ;SEND H
00E0  7D        314          LD   A,L                ;GET L
00E1  CD910A    315          CALL SENDBY             ;SEND L
00E4  DD22CA10  316          LD   (STRUCT+XERRT),IX  ;GET IX
00E8  DD7E4A    317          LD   A,(IX+XERRT)       ;GET LOW BYTE
00EB  CD910A    318          CALL SENDBY             ;SEND IT
00EE  DD7E4B    319          LD   A,(IX+XERRT+1)     ;GET HIGH BYTE
00F1  CD910A    320          CALL SENDBY             ;SEND IT
00F4  FD22CA10  321          LD   (STRUCT+XERRT),IY  ;GET IY
00F8  DD7E4A    322          LD   A,(IX+XERRT)       ;GET LOW BYTE
00FB  CD910A    323          CALL SENDBY             ;SEND IT
00FE  DD7E4B    324          LD   A,(IX+XERRT+1)     ;GET HIGH BYTE
0101  CD910A    325          CALL SENDBY             ;SEND IT
0104  D9        326          EXX                     ;SAVE PRIMARY REGISTERS
0105  2E00      327          LD   L,0                ;CLEAR POINTER
0107  2600      328          LD   H,0                ;CLEAR POINTER
0109  39        329          ADD  HL,SP              ;GET THE STACK POINTER
010A  7D        330          LD   A,L                ;GET THE LOW BYTE
010B  CD910A    331          CALL SENDBY             ;SEND IT
010E  7C        332          LD   A,H                ;GET THE HIGH BYTE
0111  CD910A    333          CALL SENDBY             ;SEND IT
0112  D9        334          EXX                     ;RESTORE PRIMARY REGS
0113  F1        335          POP  AF                 ;RESTORE A AND F
0114  1895      336          JR   XERR0              ;DO IT AGAIN
0116  F1        337  XERR1: POP  AF                 ;POP A AND F
0117  08        338          EX   AF,AF'             ;SAVE A AND F
0118  D9        339          EXX                     ;SAVE PRIMARY REGISTERS
0119  DDCB0F66  340  XERR2: BIT  4,(IX+GDR15)       ;TEST THE INPUT
011D  28FA      341          JR   Z,XERR2            ;JUMP IF NOT SET
011F  DB04      342          IN   A,(4)              ;GET THE DATA
0121  6F        343          LD   L,A                ;SAVE THE LOW ADDRESS
0122  DDCB0FA6  344          RES  4,(IX+GDR15)       ;RESET THE FLAG
0126  DD7E0F    345          LD   A,(IX+GDR15)       ;GET THE STATUS
0129  D302      346          OUT  (2),A              ;SEND THE STATUS
012B  DDCB0F66  347  XERR3: BIT  4,(IX+GDR15)       ;TEST THE INPUT
012F  28FA      348          JR   Z,XERR3            ;JUMP IF NOT SET
0131  DB04      349          IN   A,(4)              ;GET THE DATA
0133  67        350          LD   H,A                ;SAVE THE HIGH ADDRESS
0134  DDCB0FA6  351          RES  4,(IX+GDR15)       ;RESET THE FLAG
0138  DD7E0F    352          LD   A,(IX+GDR15)       ;GET THE STATUS
013B  D302      353          OUT  (2),A              ;SEND THE STATUS
013D  7E        354          LD   A,(HL)             ;GET THE MEMORY DATA
013E  CD910A    355          CALL SENDBY             ;SEND THE DATA
0141  D9        356          EXX                     ;RESTORE PRIMARY REGS
0142  08        357          EX   AF,AF'             ;RESTORE A AND F
0143  C3AB00    358          JP   XERR0              ;DO IT AGAIN
                 359  ;
                 360  ; FRAME ************************************** **
                 361  ;
                 362  ; FRAME IS THE INTERRUPT SERVICE ROUTINE FOR A FRAME
                 363  ; COUNT INTERRUPT (FIRST PRIORITY, MASKABLE INTERRUPT).
                 364  ; FRAME FIRST SETS THE FRAME INTERRUPT FLAG, INCREMENTS
                 365  ; THE FRAME COUNT, CALLS NULL, THE FRAME SERVICE
                 366  ; ROUTINE IN RAM, AND THEN RESETS THE FRAME INTERRUPT
                 367  ; FLAG. NOTE THAT THE OUTPUT TO THE DISPLAY PORT FORCES
                 368  ; A RESET OF THE INTERUPT FOR THE FRAME INTERRUPT,
                 369  ; SINCE THE INTERRUPT IS PRODUCED ON THIS PORT.
                 370  ;
                 371  ; CALLS          NULL
                 372  ;
                 373  ; CALLED BY      FIRST PRIORITY MASKABLE INTERRUPT
                 374  ;
                 375  ; REGISTERS      A       (TEMPORARY)
                 376  ;                F       (TEMPORARY)
                 377  ;                IX      (INDEX)
                 378  ;
                 379  ; I/O            PORT 0  (DISPLAY)
                 380  ;                PORT 2  (STATUS)
                 381  ;
                 382  ; STRUCTURES     GDR4    (FRAME COUNT)
                 383  ;                GDR14   (DISPLAY FORMAT)
                 384  ;                GDR15   (STATUS)
                 385  ;
0146  F5        386  FRAME:  PUSH AF                 ;SAVE A AND F
0147  FB        387          EI                      ;ENABLE INTERRUPTS
0148  DDCB0FD6  388          SET  2,(IX+GDR15)       ;SET FRAME INTERRUPT
014C  DD7E0F    389          LD   A,(IX+GDR15)       ;GET GDR15
014F  D302      390          OUT  (2),A              ;UPDATE THE STATUS
0151  DD3404    391          INC  (IX+GDR4)          ;INCREMENT FRAME COUNT
0154  CDCC10    392          CALL STRUCT+NULL        ;CALL NULL IN RAM
0157  DD7E0E    393          LD   A,(IX+GDR14)       ;GET THE DISPLAY FORMAT
015A  D300      394          OUT  (0),A              ;SEND IT
015C  DDCB0F96  395          RES  2,(IX+GDR15)       ;RESET FRAME INTERRUPT
0160  DD7E0F    396          LD   A,(IX+GDR15)       ;GET THE STATUS
0163  D302      397          OUT  (2),A              ;UPDATE THE STATUS
0165  F1        398          POP  AF                 ;RESTORE A AND F
0166  ED4D      399          RETI                    ;RETURN FROM INTERRUPT
                 400  ;
                 401  ; INPUT ************************************************
                 402  ;
                 403  ; INPUT IS THE INTERRUPT SERVICE ROUTINE FOR AN INPUT
                 404  ; INTERRUPT (SECOND PRIORITY, MASKABLE INTERRUPT).
                 405  ; INPUT SIMPLY SETS THE INPUT INTERRUPT FLAG IN GDR15.
                 406  ;
                 407  ; CALLS          NONE
                 408  ;
                 409  ; CALLED BY      SECOND PRIORITY MASKABLE INTERRUPT
                 410  ;
                 411  ; REGISTERS      A       (TEMPORARY)
                 412  ;                F       (TEMPORARY)
                 413  ;                IX      (INDEX)
                 414  ;
                 415  ; I/O            PORT 2  (STATUS)
                 416  ;
                 417  ; STRUCTURES     GDR15   (STATUS)
                 418  ;
0168  F5        419  INPUT:  PUSH AF                 ;SAVE A AND F
0169  FB        420          EI                      ;ENABLE INTERRUPTS
016A  DDCB0FE6  421          SET  4,(IX+GDR15)       ;SET INPUT INTERRUPT
016E  DD7E0F    422          LD   A,(IX+GDR15)       ;GET GDR15
0171  D302      423          OUT  (2),A              ;UPDATE THE STATUS
0173  F1        424          POP  AF                 ;RESTORE A AND F
0174  ED4D      425          RETI                    ;RETURN FROM INTERRUPT
                 426  ;
                 427  ; OUTPUT ***********************************************
                 428  ;
                 429  ; OUTPUT IS THE INTERRUPT SERVICE ROUTINE FOR AN OUTPUT
                 430  ; INTERRUPT (THIRD PRIORITY, MASKABLE INTERRUPT).
                 431  ; OUTPUT SIMPLY RESETS THE OUTPUT INTERRRUPT FLAG IN
                 432  ; GDR15.
                 433  ;
                 434  ; CALLS          NONE
                 435  ;
                 436  ; CALLED BY      THIRD PRIORITY MASKABLE INTERRUPT
                 437  ;
```

Listing 2 continued on page 286

META TECHNOLOGIES
FOR YOUR DISK SYSTEM

FILE BOX
DISKETTE STORAGE SYSTEM

$19.80 ★ for 5¼" disks
for 8" disks . . .$24.95★

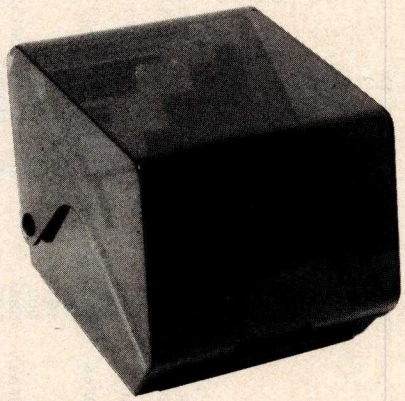

MTC brings you the ULTIMATE diskette storage system, at an affordable price. Storing 50 to 60 diskettes, this durable, smoke-colored acrylic unit provides easy access through the use of index dividers and adjustable tabs. Unique lid design provides dust-free protection and doubles as a carrying handle.

PLASTIC LIBRARY CASES
(not shown)

An economical form of storage for 10 to 15 diskettes, and is suitable for your bookshelf! Case opens into a vertical holder for easy access.

5¼-inch or 8-inch diskette case . . . . $3.00★

Single Sided, Single Density, Soft-Sectored 5¼-inch, (for TRS-80™) Mini-floppy

DISKETTES

$19.80 ★ box of 10

Meta Technologies strikes again . . . at the competition! These are factory fresh, absolutely first quality (no seconds!) mini-floppies. They are complete with envelopes, labels and write-protect tabs in a shrink-wrapped box.

INTRODUCING
PLAIN JANE™
DISKETTES
The Beautiful Floppy with the Magnetic Personality™

In 1980 alone, MTC has sold nearly a third of a million dollars worth of brand-name diskettes. If anyone knows quality, we do. And these are quality diskettes. The catch? They are in a plain white box. You're not paying for fancy printing, fancy labels or fancy names on the packaging. We don't even put our own label on the package (labels cost money). At this introductory price (our regular price will be $21.95 per box of 10) we cannot offer quantity or dealer discounts.

PLAIN JANE™ Diskettes . . . . . $19.80★

VERBATIM brand Diskettes (box of 10)

5¼-inch (for TRS-80™)
MD525-01 . . . . . $23.95
10 boxes of 10. . . (each box). . . $22.95

8-inch FLOPPIES
Single-Density, FD34-1000 . . . $29.95
Double-Density, FD34-8000 . . $39.95

TRS-80™ PRODUCTS



NEWDOS/80 by Apparat $149.95
NEWDOS+ with ALL UTILITIES
35-track $69.95
40-track $79.95
TRS-80™ DISK AND OTHER MYSTERIES . . .$19.95
MICROSOFT ™ BASIC DECODED & OTHER MYSTERIES for the TRS-80™. $29.95

THANK YOU for 1980...

To show our appreciation for a very successful year, thanks to our thousands of satisfied customers, we are offering some great products at prices even lower than our regular low prices. We make an honest effort to deliver the best products at the lowest prices with the fastest service. The confidence you have shown in MTC is recognized and welcomed. Our mothers thank you, our fathers thank you, our children thank you . . . and we thank you.

CALL FOR INFORMATION ON OTHER TRS-80™ PRODUCTS

All products guaranteed for replacement only. Prices, Specifications & Offerings subject to change without notice.

MOST ORDERS SHIPPED WITHIN ONE BUSINESS DAY

★PRICES GOOD THRU NOVEMBER 30, 1980. Sorry, no dealer or quantity discounts. Allow for shipping delays for 1980 specials.

WE ACCEPT
- VISA
- MASTER CHARGE
- CHECKS
- MONEY ORDERS
- C.O.D.

- Add $2.50 for standard UPS shipping & handling
- $2.00 EXTRA for C.O.D.
- Ohio residents add 5½% sales tax.

TO ORDER CALL TOLL FREE
1-800-321-3552
IN OHIO call (216)289-7500 (COLLECT)

META TECHNOLOGIES CORPORATION
26111 Brush Avenue, Euclid, Ohio 44132

800917

TRS-80 is a TM of Tandy Corp.
PLAIN JANE is a TM of MTC.
©1980 by Metatechnologies Corporation, Inc.

Circle 182 on inquiry card.

Listing 2 continued:

```
                        438  ; REGISTERS     A       (TEMPORARY)
                        439  ;               F       (TEMPORARY)
                        440  ;               IX      (INDEX)
                        441  ;
                        442  ; I/O           PORT 2  (STATUS)
                        443  ;
                        444  ; STRUCTURES    GDR15   (STATUS)
                        445  ;
0176  F5              446  OUTPUT: PUSH AF                 ;SAVE A AND F
0177  FB              447        EI                       ;ENABLE INTERRUPTS
0178  DDCB0F9E        448        RES  3,(IX+GDR15)        ;RESET OUTPUT INTERRUPT
017C  DD7E0F          449        LD   A,(IX+GDR15)        ;GET GDR15
017F  D302            450        OUT  (2),A               ;UPDATE THE STATUS
0181  F1              451        POP  AF                  ;RESTORE A AND F
0182  ED4D            452        RETI                     ;RETURN FROM INTERRUPT
                        453  ;
                        454  ;*************************************************
                        455  ;PROCESS DRIVERS*********************************
                        456  ;*************************************************
                        457  ;
                        458  ; INIT ****************************************
                        459  ;
                        460  ; INIT INITIALIZES MICROGRAPH. THE INPUT/OUTPUT PORTS
                        461  ; ARE FIRST SET UP, THEN MEMORY IS CLEARED. INIT THEN
                        462  ; LOADS THE RAM WITH THE STRUCTURES, THEN SET THE
                        463  ; INTERRUPTS.
                        464  ;
                        465  ; CALLS         NONE
                        466  ;
                        467  ; CALLED BY     MAIN
                        468  ;
                        469  ; REGISTERS     A       (TEMPORARY)
                        470  ;               B       (TEMPORARY)
                        471  ;               C       (TEMPORARY)
                        472  ;               D       (TEMPORARY)
                        473  ;               E       (TEMPORARY)
                        474  ;               H       (POINTER)
                        475  ;               L       (POINTER)
                        476  ;               IX      (INDEX)
                        477  ;               IY      (INDEX)
                        478  ;               I       (INTERRUPT VECTOR)
                        479  ;
                        480  ; I/O           ALL PORTS
                        481  ;
                        482  ; STRUCTURES    ALL STRUCTURES
                        483  ;
0184  3E0F            484  INIT:   LD   A,00001111B        ;LOAD MODE 2 MASK
0186  D301            485        OUT  (1),A               ;SET UP DISPLAY
0188  D303            486        OUT  (3),A               ;SET UP STATUS
018A  D307            487        OUT  (7),A               ;SET UP OUTPUT
018C  3E4F            488        LD   A,01001111B         ;LOAD MODE 1 MASK
018E  D305            489        OUT  (5),A               ;SET UP INPUT
0190  3E68            490        LD   A,INT0              ;GET FIRST VECTOR
0192  D301            491        OUT  (1),A               ;SET UP FRAME INTERRUPT
0194  3E6A            492        LD   A,INT1              ;GET SECOND VECTOR
0196  D305            493        OUT  (5),A               ;SET UP INPUT INTERUPT
0198  3E6C            494        LD   A,INT2              ;GET THIRD INTERRUPT
019A  D307            495        OUT  (7),A               ;SET UP OUTPUT INT
019C  3E07            496        LD   A,00000111B         ;DISABLE INTERRUPTS
019E  D303            497        OUT  (3),A               ;SET STATUS
01A0  3E87            498        LD   A,10000111B         ;ENABLE INTERRUPTS
01A2  D301            499        OUT  (1),A               ;SET DISPLAY
01A4  D305            500        OUT  (5),A               ;SET INPUT
01A6  D307            501        OUT  (7),A               ;SET OUTPUT
01A8  3E80            502        LD   A,10000000B         ;SET STATUS
01AA  D302            503        OUT  (2),A               ;SET STATUS
01AC  DD218010        504        LD   IX,STRUCT           ;SET UP IX
01B0  DD360000        505        LD   (IX+0),0            ;CLEAR FIRST WORD
01B4  218010          506        LD   HL,STRUCT           ;POINT TO STRUCT
01B7  118110          507        LD   DE,STRUCT+1         ;POINT TO NEXT STRUCT
01BA  014D00          508        LD   BC,FREE-STRUCT      ;SET UP COUNT
01BD  EDB0            509        LDIR                     ;CLEAR PRIVATE RAM
01BF  210400          510        LD   HL,ESTRUCT          ;POINT TO STRUCTURES
01C2  118010          511        LD   DE,STRUCT           ;POINT TO STRUCT
01C5  014D00          512        LD   BC,ENULL-ESTRUCT+1  ;GET THE COUNT
01C8  EDB0            513        LDIR                     ;LOAD STRUCTURES
01CA  210020          514        LD   HL,RBOTTOM          ;POINT TO RBOTTOM
01CD  3600            515        LD   (HL),0              ;CLEAR FIRST LOCATION
01CF  110120          516        LD   DE,RBOTTOM+1        ;POINT TO NEXT LOCATION
01D2  010018          517        LD   BC,RTOP-RBOTTOM+1   ;GET THE COUNT
01D5  EDB0            518        LDIR                     ;CLEAR REFRESH RAM
01D7  DDCB0FBE        519        RES  7,(IX+GDR15)        ;CLEAR INIT STATUS
01DB  DD7E0F          520        LD   A,(IX+GDR15)        ;GET GDR15
01DE  D302            521        OUT  (2),A               ;UPDATE STATUS
01E0  3E00            522        LD   A,0                 ;CLEAR A
01E2  ED47            523        LD   I,A                 ;SET UP INTERRUPT VECTOR
01E4  ED5E            524        IM   2                   ;SET INTERRUPT MODE 2
01E6  FB              525        EI                       ;ENABLE INTERRUPTS
01E7  DD7E0E          526        LD   A,(IX+GDR14)        ;SET DISPLAY MASK
01EA  D300            527        OUT  (0),A               ;SET DISPLAY MODE
01EC  C9              528        RET                      ;RETURN
                        529  ;
                        530  ; FETCH ***************************************
                        531  ;
                        532  ; FETCH OBTAINS PRIMITIVES AND DATA FROM THE INPUT
                        533  ; STREAM (FROM THE HOST COMPUTER OR A GRAPHICS
                        534  ; SUBROUTINE IN RAM). FETCH FIRST SETS THE FETCH STATUS.
                        535  ; IF SPTR IS SET, FETCH GETS DATA FROM THE CURRENT
                        536  ; SUBROUTINE POINTER. OTHERWISE, FETCH GETS DATA FROM
                        537  ; PORT 4, THE HOST INPUT. IN ANY CASE, THE PRIMITIVE
                        538  ; OR DATA IS PUT IN REGISTER A. FETCH FINALLY CLEARS
                        539  ; THE FETCH STATUS.
                        540  ;
                        541  ; CALLS         NONE
                        542  ;
                        543  ; CALLED BY     MAIN
                        544  ;               LCRAM
                        545  ;               LPIX
                        546  ;               LREG
                        547  ;               LSUB
                        548  ;               LSYM
                        549  ;               MOV
                        550  ;               RCRAM
                        551  ;               RSYM
                        552  ;               SYM
                        553  ;               VEC
                        554  ;               WAIT
                        555  ;               GETBK
                        556  ;
                        557  ; REGISTERS     A       (RETURNS DATA)
                        558  ;               B       (TEMPORARY)
                        559  ;               D       (POINTER)
                        560  ;               E       (POINTER)
                        561  ;               H       (POINTER)
                        562  ;               L       (POINTER)
                        563  ;               IX      (INDEX)
                        564  ;               IY      (INDEX)
                        565  ;
                        566  ; I/O           PORT 2  (STATUS)
                        567  ;               PORT 4  (INPUT)
                        568  ;
                        569  ; STRUCTURES    GDR15   (STATUS)
                        570  ;               SLINK   (GRAPHICS SUBROUTINE LINKAGE)
                        571  ;-              SPTR    (GRAPHICS SUBROUTINE POINTER)
                        572  ;               SOFF    (GRAPHICS SUBROUTINE OFFSET)
                        573  ;
01ED  DDCB0FF6        574  FETCH:  SET  6,(IX+GDR15)       ;SET FETCH FLAG
01F1  DD7E0F          575        LD   A,(IX+GDR15)        ;GET GDR15
01F4  D302            576        OUT  (2),A               ;UPDATE THE STATUS
01F6  DDCB405E        577        BIT  3,(IX+SPTR)         ;TEST SPTR
01FA  200F            578        JR   NZ,FETCH1           ;JUMP IF SUBROUTINE
01FC  DDCB0F66        579  FETCH0: BIT  4,(IX+GDR15)       ;TEST INPUT INTERRUPT
0200  28FA            580        JR   Z,FETCH0            ;JUMP IF NO INTERRUPT
0202  DB04            581        IN   A,(4)               ;GET DATA FROM HOST
0204  F3              582        DI                       ;DISABLE THE INTERRUPTS
0205  DDCB0FA6        583        RES  4,(IX+GDR15)        ;RESET INPUT INTERRUPT
0209  1825            584        JR   FETCH2              ;JUMP TO THE EXIT
020B  D5              585  FETCH1: PUSH DE                 ;SAVE D AND E
020C  E5              586        PUSH HL                  ;SAVE H AND L
020D  FDE5            587        PUSH IY                  ;SAVE IY
020F  DD5E40          588        LD   E,(IX+SPTR)         ;GET SUB POINTER
```

Listing 2 continued on page 288

"GET A HEAD START ON TOMORROW WITH THE SOFTWARE THAT'S GOING PLACES. THE UCSD p-SYSTEM.™"

JULIE ERWIN, Director of Marketing, SofTech Microsystems



Our microcomputer software system's going places for good reasons:

We're constantly expanding and developing it. We started with UCSD Pascal,™ added FORTRAN, and we'll be introducing more in the months ahead.

We offer a total development and execution environment, from operating system and cross assemblers to screen editor.

We run on most major microprocessors today: Z80, 8080, 8085, 6502, 6800, 6809, 9900 and LSI-11.™ And because the UCSD p-System's portable, you can be sure that what you invest in software today is a good investment in tomorrow.

We're going places and gaining in popularity with microcomputer manufacturers, applications developers, and demanding end users. Get a head start on tomorrow by working with a company that knows how to develop professional quality software, and that's committed to delivering it.

Our system's available for distribution licensing or for single-copy sales. With Pascal, it costs $350... with FORTRAN, $400... and with both languages, $550. Documentation sets are $50. Phone orders are welcome, and Visa and Master Card orders are accepted. Write or call for more details.

SOFTECH MICROSYSTEMS
A SUBSIDIARY OF SOFTECH

9494 Black Mountain Road, San Diego, CA 92126. (714) 578-6105
TWIX: 910-335-1594

UCSD p-System and UCSD Pascal are trademarks of the Regents of the University of California. LSI-11 is a trademark of Digital Equipment Corp.

Circle 183 on inquiry card.

Listing 2 continued:

```
0212  CB23      589          SLA  E                    ;MULTIPLY BY TWO
0214  1600      590          LD   D,0                  ;CLEAR POINTER
0216  FD219010  591          LD   IY,STRUCT+SLINK      ;LOAD SLINK ADDRESS
021A  FD19      592          ADD  IY,DE                ;ADD THE OFFSET
021C  FD6E00    593          LD   L,(IY+0)             ;GET LOW BYTE OF ENTRY
021F  FD6601    594          LD   H,(IY+1)             ;GET HIGH BYTE OF ENTRY
0222  DD5E41    595          LD   E,(IX+SOFF)          ;GET OFFSET
0225  1600      596          LD   D,0                  ;CLEAR POINTER
0227  DD3441    597          INC  (IX+SOFF)            ;INCREMENT OFFSET
022A  19        598          ADD  HL,DE                ;ADD OFFSET
022B  7E        599          LD   A,(HL)               ;GET DATA FROM SUB
022C  FDE1      600          POP  IY                   ;RESTORE IY
022E  E1        601          POP  HL                   ;RESTORE HL
022F  D1        602          POP  DE                   ;RESTORE DE
0230  F5        603  FETCH2: PUSH AF                   ;SAVE A AND F
0231  DDCB0FB6  604          RES  6,(IX+GDR15)         ;RESET FETCH FLAG
0235  DD7E0F    605          LD   A,(IX+GDR15)         ;GET GDR15
0238  D302      606          OUT  (2),A                ;UPDATE THE STATUS
023A  FB        607          EI                        ;ENABLE THE INTERRRUPTS
023B  F1        608          POP  AF                   ;RESTORE A AND F
023C  C9        609          RET                       ;RETURN
                610  ;
                611  ; EXEC ************************************************
                612  ;
                613  ; EXEC IS THE FIRST STEP IN EXECUTING A GRAPHICS
                614  ; PRIMITIVE. EXECUTE FIRST SETS THE EXECUTE FLAG, THEN
                615  ; CALLS PRIMAT, WHICH JUMPS TO THE PROPER PRIMITIVE.
                616  ; AFTER A RETURN FROM THE PRIMITIVE ITSELF, EXEC
                617  ; RESETS THE EXECUTE FLAG AND RETURNS.
                618  ;
                619  ; CALLS          PRIMAT
                620  ;
                621  ; CALLED BY      MAIN
                622  ;
                623  ; REGISTERS      A       (TEMPORARY)
                624  ;                F       (TEMPORARY)
                625  ;                IX      (INDEX)
                626  ;
                627  ; I/O            PORT 2  (STATUS)
                628  ;
                629  ; STRUCTURES     GDR15   (STATUS)
                630  ;
023D  F5        631  EXEC:   PUSH AF                   ;SAVE A AND F
023E  DDCB0FEE  632          SET  5,(IX+GDR15)         ;SET EXECUTE FLAG
0242  DD7E0F    633          LD   A,(IX+GDR15)         ;GET GDR15
0245  D302      634          OUT  (2),A                ;UPDATE THE STATUS
0247  F1        635          POP  AF                   ;RESTORE A AND F
0248  CD5502    636          CALL PRIMAT               ;CALL PRIMAT
024B  DDCB0FAE  637          RES  5,(IX+GDR15)         ;RESET EXECUTE FLAG
024F  DD7E0F    638          LD   A,(IX+GDR15)         ;GET THE STATUS
0252  D302      639          OUT  (2),A                ;UPDATE THE STATUS
0254  C9        640          RET                       ;RETURN
                641  ;
                642  ;*****************************************************
                643  ;GRAPHICS PRIMITIVES*********************************
                644  ;*****************************************************
                645  ;
                646  ; PRIMAT ***********************************************
                647  ;
                648  ; PRIMAT IS THE SECOND STEP IN EXECUTING A PRIMITIVE.
                649  ; PRIMAT FIRST DETERMINES THE PRIMITIVE NUMBER FROM THE
                650  ; OP CODE IN REGISTER A, AND PUTS A POINTER TO THIS
                651  ; ADDRESS IN IY. HL IS THEN LOADED WITH THE SUBROUTINE
                652  ; ADDRESS ITSELF, THEN PRIMAT JUMPS TO THIS LOCATION.
                653  ; NOTE THAT A RETURN FROM A PRIMITIVE SUBROUTINE
                654  ; ACTUALLY RETURNS TO EXEC.
                655  ;
                656  ; CALLS          NONE
                657  ;
                658  ; CALLED BY      EXEC
                659  ;
                660  ; REGISTERS      A       (PRIMITIVE OP CODE)
                661  ;                D       (POINTER)
                662  ;                E       (POINTER)
                663  ;                H       (POINTER)
                664  ;                L       (POINTER)
                665  ;                IY      (INDEX)
                666  ;
                667  ; I/O            NONE
                668  ;
                669  ; STRUCTURES     PENTER  (PRIMITIVE ENTRY POINTS)
                670  ;
0255  5F        671  PRIMAT: LD   E,A                  ;SAVE A COPY OF A IN E
0256  CB3B      672          SRL  E                    ;SHIFT THE OP
0258  CB3B      673          SRL  E                    ;   CODE RIGHT FOUR
025A  CB3B      674          SRL  E                    ;   BITS TO MAINTAIN
025C  CB3B      675          SRL  E                    ;   THE OFFSET
025E  CB23      676          SLA  E                    ;MULTIPLY BY TWO
0260  1600      677          LD   D,0                  ;CLEAR THE POINTER
0262  FD216E00  678          LD   IY,PENTER            ;LOAD PENTER ADDRESS
0266  FD19      679          ADD  IY,DE                ;ADD THE OFFSET IN HL
0268  FD6E00    680          LD   L,(IY+0)             ;LOAD LOW BYTE OF SUB
026B  FD6601    681          LD   H,(IY+1)             ;LOAD HIGH BYTE OF SUB
026E  E9        682          JP   (HL)                 ;JUMP TO SUBROUTINE
                683  ;
                684  ; CALLS ************************************************
                685  ;
                686  ; CALLS CALLS A MICROCOMPUTER OR GRAPHICS SUBROUTINE.
                687  ; CALLS FIRST DETERMINES WHAT TYPE OF SUBROUTINE IS
                688  ; BEING CALLED. IF IT IS A MICROCOMPUTER SUBROUTINE,
                689  ; CALLS CALLS THE PROPER SUBROUTINE AS LINKED BY
                690  ; SLINK. OTHERWISE, CALLS PUSHES SPTR AND SOFF ON THE
                691  ; GRAPHICS SUBROUTINE STACK, AND LOADS THE NEW VALUES
                692  ; FOR SPTR AND SOFF. FUTURE DATA FROM FETCH THEN COMES
                693  ; FROM THIS GRAPHICS SUBROUTINE UNTIL A RETN IS
                694  ; EXECUTED.
                695  ;
                696  ; CALLS          USER    (INDIRECTLY, BY DEFAULT)
                697  ;                GUSER   (INDIRECTLY, BY DEFAULT)
                698  ;                USER SUB(INDIRECTLY)
                699  ;
                700  ; CALLED BY      PRIMAT  (INDIRECTLY)
                701  ;
                702  ; REGISTERS      A       (PRIMITIVE OP CODE)
                703  ;                B       (TEMPORARY)
                704  ;                D       (TEMPORARY)
                705  ;                E       (TEMPORARY)
                706  ;                H       (POINTER)
                707  ;                L       (POINTER)
                708  ;                IX      (INDEX)
                709  ;
                710  ; I/O            NONE
                711  ;
                712  ; STRUCTURES     GPC     (GRAPHICS STACK POINTER)
                713  ;                GSTACK  (GRAPHICS STACK)
                714  ;                SOFF    (GRAPHICS SUBROUTINE OFFSET)
                715  ;                SLINK   (GRAPHICS SUBROUTINE LINKAGE)
                716  ;                SPTR    (GRAPHICS SUBROUTINE POINTER)
                717  ;
026F  CB5F      718  CALLS:  BIT  3,A                  ;TEST T BIT IN OP CODE
0271  2014      719          JR   NZ,CALLS1            ;JUMP IF GRAPHICS SUB
0273  FD219010  720          LD   IY,STRUCT+SLINK      ;GET LINK BASE
0277  E607      721          AND  00000111B            ;MASK ALL BUT SUB
0279  CB27      722          SLA  A                    ;MULTIPLY BY TWO
027B  5F        723          LD   E,A                  ;SAVE A IN E
027C  1600      724          LD   D,0                  ;CLEAR POINTER
027E  FD19      725          ADD  IY,DE                ;ADD OFFSET TO IY
0280  FD6E00    726          LD   L,(IY+0)             ;GET LOW ADDRESS
0283  FD6601    727          LD   H,(IY+1)             ;GET HIGH ADDRESS
0286  E9        728          JP   (HL)                 ;JUMP TO SUBROUTINE
0287  217F10    729  CALLS1: LD   HL,GSTACK          ;LOAD GSTACK ADDRESS
028A  DD5E42    730          LD   E,(IX+GPC)           ;GET GPC
028D  1600      731          LD   D,0                  ;CLEAR POINTER
028F  B7        732          OR   A                    ;RESET THE CARRY
0290  ED52      733          SBC  HL,DE                ;SUBTRACT POINTER
0292  DD4640    734          LD   B,(IX+SPTR)          ;LOAD SPTR
0295  70        735          LD   (HL),B               ;PUT SPTR ON GSTACK
0296  DD4641    736          LD   B,(IX+SOFF)          ;LOAD SOFF
0299  2B        737          DEC  HL                   ;UPDATE THE POINTER
029A  70        738          LD   (HL),B               ;PUT SOFF ON GSTACK
```

Listing 2 continued on page 290

FOLLOW THE LEADER.



DataStar.™ A general purpose key to disk data entry software package that's way ahead of the pack.

DataStar has two distinct phases. One allows you to actually design on the CRT the exact form you need. The other allows you to store and retrieve data. Quickly. And accurately. So, when it comes to data entry and verification, go with the leader.

Go with DataStar.

WordStar.™ The world leader in microcomputer word processing.

With so many advanced features, isn't it quite obvious? WordStar is a born leader. In fact, more than seven thousand people have purchased WordStar from over 300 dealers around the world. In just the first year! Proof positive that WordStar is *the* word processing software package for Z-80, 8085 and 8080 microcomputers.

SuperSort.™ It makes sorting so simple, it's simply in a class by itself.


There you are. With a *mountain* of tedious tasks. But don't panic. Here comes SuperSort to the rescue! SuperSort is faster, more powerful and able to sort 560 records in a single minute. Hooray for SuperSort. It makes molehills out of mountains.

WordMaster.™ It's everything you've ever wanted in a video text editor. And more.

WordMaster is so powerful and flexible it can actually double as a word processor. Yet it has all the capabilities you need to enhance your file management needs on a small budget. No wonder it's the path most programmers wish to take.

I/O Master.™ The economic route to quality printing.

Now you can get better input/output performance for less money because I/O Master's S-100 board gives you the advantage of using lower cost O.E.M. letter quality printers. Plus you get so many extra features. Like two fully-buffered serial ports, so you'll never have to worry about keystrokes and data ever getting lost again.

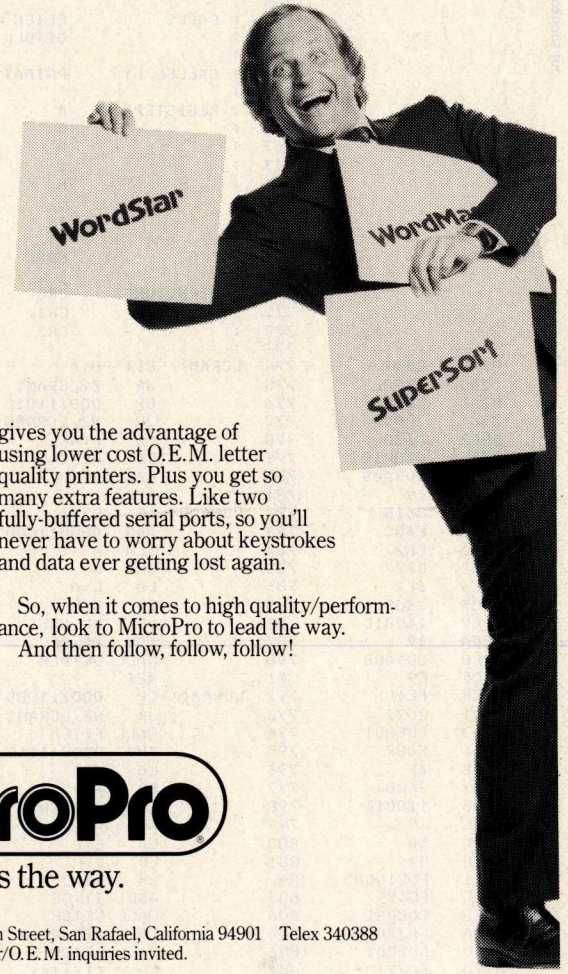

So, when it comes to high quality/performance, look to MicroPro to lead the way.

And then follow, follow, follow!

MicroPro®

Leads the way.

MicroPro International Corporation 1299 4th Street, San Rafael, California 94901 Telex 340388
Dealer/Distributor/O.E.M. inquiries invited.


Prices and specifications subject to change without notice.

Listing 2 continued:

```
029B  E60F      739          AND  00001111B          ;AND ALL BUT SUB
029D  DD7740    740          LD   (IX+SPTR),A        ;UPDATE SPTR
02A0  DD364100  741          LD   (IX+SOFF),0        ;UPDATE SOFF
02A4  DD3442    742          INC  (IX+GPC)           ;INCREMENT GPC
02A7  DD3442    743          INC  (IX+GPC)           ;INCREMENT GPC
02AA  C9        744          RET                     ;RETURN
                745  ;
                746  ; LCRAM ***********************************************
                747  ;
                748  ; LCRAM LOADS THE COLOR RAMS. LCRAM FIRST DETERMINES IF
                749  ; A SINGLE OR ALL COLOR RAMS ARE TO BE LOADED. IF A
                750  ; SINGLE COLOR RAM IS TO BE LOADED, THE ENTIRE RAM OR
                751  ; A SINGLE ADDRESS OF THAT RAM IS TO BE LOADED.
                752  ; OTHERWISE, ALL THREE COLOR RAMS ARE EITHER ENTIRELY
                753  ; LOADED, OR A SINGLE ADDRESS IN ALL THREE IS LOADED.
                754  ;
                755  ; CALLS         FETCH
                756  ;               GETBLK
                757  ;
                758  ; CALLED BY     PRIMAT  (INDIRECTLY)
                759  ;
                760  ; REGISTERS     A       (PRIMITIVE OP CODE)
                761  ;               B       (COUNTER)
                762  ;               D       (TEMPORARY)
                763  ;               E       (TEMPORARY)
                764  ;               H       (POINTER)
                765  ;               L       (POINTER)
                766  ;               IY      (INDEX)
                767  ;
                768  ; I/O           NONE
                769  ;
                770  ; STRUCTURES    CR0     (COLOR RAM 0)
                771  ;               CR1     (COLOR RAM 1)
                772  ;               CR2     (COLOR RAM 2)
                773  ;
02AB  CB47      774  LCRAM:  BIT  0,A                ;TEST SINGLE BIT
02AD  2820      775          JR   Z,LCRAM1           ;JUMP IF SINGLE
02AF  FE1D      776          CP   00011101B          ;TEST FOR ALL
0281  2009      777          JR   NZ,LCRAM0          ;JUMP IF NOT ALL
02B3  0630      778          LD   B,48               ;SET COUNT OF 48 BYTES
02B5  21001C    779          LD   HL,CR0             ;SET START ADDRESS
02B8  CD9A08    780          CALL GETBLK             ;CALL GETBLK
02BB  C9        781          RET                     ;RETURN
02BC  0610      782  LCRAM0: LD   B,16               ;SET COUNT OF 16 BYTES
02BE  E60C      783          AND  00001100B          ;MASK OFF OPCODE
02C0  CB27      784          SLA  A                  ;SHIFT OFFSET
02C2  CB27      785          SLA  A                  ;SHIFT OFFSET
02C4  6F        786          LD   L,A                ;SAVE OFFSET
02C5  2600      787          LD   H,0                ;CLEAR POINTER
02C7  11001C    788          LD   DE,CR0             ;GET START ADDRESS
02CA  19        789          ADD  HL,DE              ;ADD TO OFFSET
02CB  CD9A08    790          CALL GETBLK             ;CALL GETBLK
02CE  C9        791          RET                     ;RETURN
02CF  FE1C      792  LCRAM1: CP   00011100B          ;TEST FOR ALL
02D1  2027      793          JR   NZ,LCRAM2          ;JUMP IF NOT ALL
02D3  CDED01    794          CALL FETCH              ;GET OFFSET
02D6  E60F      795          AND  00001111B          ;MASK ALL BUT OFFSET
02D8  6F        796          LD   L,A                ;SAVE OFFSET
02D9  2600      797          LD   H,0                ;CLEAR POINTER
02DB  11001C    798          LD   DE,CR0             ;GET START ADDRESS
02DE  19        799          ADD  HL,DE              ;ADD TO OFFSET
02DF  5D        800          LD   E,L                ;RESTORE LOW BYTE
02E0  54        801          LD   D,H                ;RESTORE HIGH BYTE
02E1  FD210000  802          LD   IY,0               ;CLEAR INDEX
02E5  FD19      803          ADD  IY,DE              ;MOVE POINTER TO INDEX
02E7  CDED01    804          CALL FETCH              ;GET DATA
02EA  FD7700    805          LD   (IY+0),A           ;LOAD DATA IN CR0
02ED  CDED01    806          CALL FETCH              ;GET DATA
02F0  FD7710    807          LD   (IY+16),A          ;LOAD DATA IN CR1
02F3  CDED01    808          CALL FETCH              ;GET DATA
02F6  FD7720    809          LD   (IY+32),A          ;LOAD DATA IN CR2
02F9  C9        810          RET                     ;RETURN
02FA  0601      811  LCRAM2: LD   B,1                ;SET COUNT OF 1 BYTE
02FC  E60C      812          AND  00001100B          ;MASK ALL BUT OFFSET
02FE  CB27      813          SLA  A                  ;SHIFT OFFSET
0300  CB27      814          SLA  A                  ;SHIFT OFFSET
0302  6F        815          LD   L,A                ;SAVE A IN L
0303  2600      816          LD   H,0                ;CLEAR POINTER
0305  CDED01    817          CALL FETCH              ;GET OFFSET
0308  E60F      818          AND  00001111B          ;MASK ALL BUT OFFSET
030A  85        819          ADD  A,L                ;ADD OFFSET
030B  6F        820          LD   L,A                ;SAVE OFFSET
030C  11001C    821          LD   DE,CR0             ;GET START ADDRESS
030F  19        822          ADD  HL,DE              ;ADD OFFSET
0310  CD9A08    823          CALL GETBLK             ;GET DATA
0313  C9        824          RET
                825  ;
                826  ; LPIX ************************************************
                827  ;
                828  ; LPIX LOADS PIXEL DATA ACCORDING TO THE GIVEN
                829  ; REFERENCE. LPIX CAN LOAD EITHER FULL FRAME, ONE
                830  ; PIXEL AT XY, OR AN ENTIRE VIEWPORT. THE PIXELS ARE
                831  ; LOADED IN EITHER THE PRIMARY COLOR, THE SECONDARY
                832  ; COLOR, OR AS SPECIFIED IN THE DATA WHICH FOLLOWS.
                833  ; LPIX FIRST CHECKS TO SEE IF ONLY A SINGLE POINT IS
                834  ; LOADED. IF SO, LPIX LOADS THE APPROPRIATE COLOR.
                835  ; OTHERWISE, LPIX SETS A FLAG IF THERE IS A FULL FRAME
                836  ; LOAD REQUESTED. NEXT, LPIX DETERMINES WHAT COLOR IS
                837  ; REQUESTED. IF THE COLOR DOES NOT FOLLOW, A FLAG IS
                838  ; SET, AND THE APPROPRIATE COLOR IS LOADED FROM THE
                839  ; GRAPHICS DISPLAY REGISTERS. NEXT, LPIX CLEARS BOTH
                840  ; X AND Y, AND PROCEDES TO LOAD THE PIXELS FROM
                841  ; THE ORIGIN OF THE DISPLAY TO THE TOP, ONE LINE AT
                842  ; A TIME. CLIP IS CALLED IF THERE IS A VIEWPORT
                843  ; REFERENCE TO SEE IF THAT POINT WILL ACTUALLY BE
                844  ; LOADED. LPIX IS COMPLETED WHEN X AND Y RECYCLE TO THE
                845  ; ORIGIN.
                846  ;
                847  ; CALLS         FETCH
                848  ;               CASE
                849  ;               CLIP
                850  ;               POKE
                851  ;
                852  ; CALLED BY     PRIMAT  (INDIRECTLY)
                853  ;
                854  ; REGISTERS     A       (PRIMITIVE OP CODE, TEMPORARY)
                855  ;               B       (CASE)
                856  ;               C       (CLIP SUCCESS FLAG)
                857  ;               D       (FULL FRAME FLAG)
                858  ;               E       (COLOR FOLLOWS FLAG)
                859  ;               IX      (INDEX)
                860  ;
                861  ; I/O           NONE
                862  ;
                863  ; STRUCTURES    GRD0    (X)
                864  ;               GDR1    (Y)
                865  ;               GDR2    (PRIMARY COLOR)
                866  ;               GDR3    (SECONDARY COLOR)
                867  ;               REF     (REFERENCE)
                868  ;
0314  1E00      869  LPIX:   LD   E,0                 ;CLEAR COLOR FOLLOWS
0316  1600      870          LD   D,0                 ;CLEAR FULL FRAME
0318  E60F      871          AND  00001111B           ;CLEAR OP CODE
031A  DD7743    872          LD   (IX+REF),A          ;SAVE REFERENCE
031D  DDCB433E  873          SRL  (IX+REF)            ;ADJUST REFERENCE
0321  DDCB433E  874          SRL  (IX+REF)            ;ADJUST REFERENCE
0325  CB5F      875          BIT  3,A                 ;TEST REFERENCE
0327  2821      876          JR   Z,LPIX4             ;JUMP IF VIEWPORT REF
0329  CB57      877          BIT  2,A                 ;TEST REFERENCE
032B  2819      878          JR   Z,LPIX3             ;JUMP IF FULL FRAME
032D  CB4F      879          BIT  1,A                 ;TEST COLOR FOLLOWS
032F  200E      880          JR   NZ,LPIX1            ;JUMP IF COLOR FOLLOWS
0331  CB47      881          BIT  0,A                 ;TEST COLOR TYPE
0333  2805      882          JR   Z,LPIX0             ;JUMP IF PRIMARY COLOR
0335  DD7E03    883          LD   A,(IX+GDR3)         ;LOAD SECONDARY COLOR
0338  1808      884          JR   LPIX2               ;JUMP AROUND FETCH
033A  DD7E02    885  LPIX0:  LD   A,(IX+GDR2)         ;LOAD PRIMARY COLOR
033D  1803      886          JR   LPIX2               ;JUMP AROUND FETCH
033F  CDED01    887  LPIX1:  CALL FETCH               ;GET THE COLOR DATA
0342  CD390A    888  LPIX2:  CALL POKE                ;POKE THE COLOR AT XY
```

Listing 2 continued on page 292

Circle 184 on inquiry card.

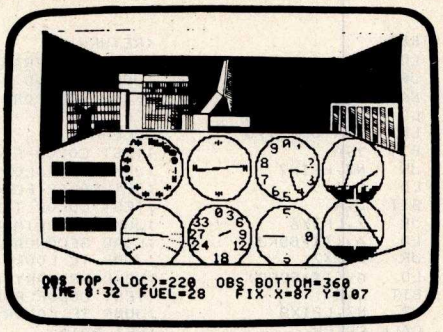

APPLE II 24K IFR SIMULATOR FLIGHT TRAINER

The latest version of IFR SIM includes duel nav radios and allows the pilot to actually practice IFR landings and navigation. Features a HIRES plot of the flight that is flipped in & out with "ESC" key.

Smooth fluid real-time response gives your Apple more flight simulator power than most 10,000 machines on the market today.

$25.00 for one on disk, three for $37.50.

AVAILABLE FROM

PROGRAMMERS SOFTWARE EXCHANGE
2110 N 2nd St
Cabot AR 72023
(501) 843-6037

Circle 185 on inquiry card.

TERMINALS FROM TRANSNET

PURCHASE PLAN	12-24 MONTH FULL OWNERSHIP PLAN		36 MONTH LEASE PLAN
DESCRIPTION	PURCHASE PRICE	PER MONTH 12 MOS.	PER MONTH 24 MOS.	PER MONTH 36 MOS.
LA36 DECwriter II	$1,695	$162	$ 90	$ 61
LA34 DECwriter IV	1,095	105	59	40
LA34 DECwriter IV Forms Ctrl.	1,295	124	69	47
LA120 DECwriter III KSR	2,495	239	140	90
LA180 DECprinter I	2,095	200	117	75
VT100 CRT DECscope	1,895	182	101	68
VT132 CRT DECscope	2,295	220	122	83
DT80/1 DATAMEDIA CRT	1,995	191	106	72
TI745 Portable Terminal	1,595	153	85	57
TI765 Bubble Memory Terminal	2,595	249	146	94
TI810 RO Printer	1,895	182	101	68
TI820 KSR Printer	2,195	210	117	79
TI825 KSR Printer	1,595	153	85	57
ADM3A CRT Terminal	875	84	47	32
ADM31 CRT Terminal	1,450	139	78	53
ADM42 CRT Terminal	2,195	210	117	79
QUME Letter Quality KSR	3,295	316	176	119
QUME Letter Quality RO	2,895	278	155	105
HAZELTINE 1420 CRT	945	91	51	34
HAZELTINE 1500 CRT	1,195	115	64	43
HAZELTINE 1552 CRT	1,295	124	69	47
Hewlett-Packard 2621A CRT	1,495	144	80	54
Hewlett-Packard 2621P CRT	2,650	254	142	96

FULL OWNERSHIP AFTER 12 OR 24 MONTHS
10% PURCHASE OPTION AFTER 36 MONTHS

ACCESSORIES AND PERIPHERAL EQUIPMENT
ACOUSTIC COUPLERS • MODEMS • THERMAL PAPER
RIBBONS • INTERFACE MODULES • FLOPPY DISK UNITS
PROMPT DELIVERY • EFFICIENT SERVICE

TRANSNET CORPORATION
1945 ROUTE 22
UNION, N.J. 07083
201-688-7800
TWX 710-985-5485

SORCERER SOFTWARE

SYSTEM 2 by Richard Swannell, loads into the top of available RAM and becomes an integral part of the BASIC language. All commands are single keystroke. SYSTEM 2 is written in Z80 and provides the following features:

1. **SCREEN EDITOR.** Use the editor to insert, replace, delete or rubout characters in your BASIC program. Watch the line change on the screen! Gone are the days of typing in a whole line to change one character!
2. **FUNCTION KEYS.** SYSTEM 2 allows 12 keys to be programmed to represent one or more characters or up to several lines of text each! After a key is programmed, by simply hitting key, all the text is sent to the processor just as if you typed it in on the keyboard! Function keys may be used in all modes of operation, including the editor. This feature is handy for lengthy and/or often used commands and may include multiple statements.
3. **RENUMBERING ROUTINE.** With a single keystroke your program is renumbered. Starting line number and increment may be changed.
4. **BASIC BUFFER PROTECTOR.** SYSTEM 2 sends a (CR) when the BASIC BUFFER is full. This prevents BASIC from crashing.
5. **PRINTER DRIVER.** Simply hit CTRL P to direct output to Centronics printer.
6. **RIVIVAL ROUTINE.** If NEW or CLOAD are typed, or RESET is hit by mistake, your program may be recovered. This is a safety device.

OTHER FEATURES

- RUNSTOP stops execution until any other key is hit.
- CLEAR clears screen then sends a (CR). Hit CLEAR to start on 'new page'.
- CTRL characters such as ESC, LF and CLEAR don't return ?SN ERROR.
- RUB doesn't require the SHIFT key to be depressed. This quickens editing.
- Includes a Real Time Random Number Generator.
- Returns automatically to BASIC after TAPE CRC ERROR while CLOADing.
- Suppresses premature CRLF. Normally, if RUB is used extensively while typing in a BASIC line, the cursor will drop down to the next line before reaching the end of the current line. SYSTEM 2 prevents this.
- SYSTEM 2 requires 2K of memory and is available in 8, 16, 32 & 48K versions. **$35.50**

RS232 PRINTER DRIVER. Requires 250 bytes of memory and is relocatable. Suitable for MONITOR, STANDARD BASIC, WORD PROCESSOR PAC & DEVELOPMENT PAC. Stores each character in a buffer then sends the whole line at once, which solves timing problems. **$10.00**

COMBINED SYSTEM 2 & RS232 PRINTER DRIVER. SYSTEM 2 with the RS232 printer driver instead of Centronics printer driver. **$40.00**

LUNA LANDER. Written in Z80 and Basic and requiring 16K, LUNA LANDER uses graphics to the full. Land you craft on the moon in real time. But be careful to land softly, otherwise you will see your LANDER crumple before your very eyes! **$15.00**



SYSTEM SOFTWARE
1 Kent Street, Bicton, 6157 Australia

Program comes on cassette and includes full documentation. Specify size of RAM. Prices in Australian Dollars. Add $2 for overseas airmail.
SORCERER is a trade mark of **EXIDY INC.**



GREAT FOR XMAS

ATTACHE STYLE CASES FOR CARRYING AND PROTECTING A COMPLETE COMPUTER SET-UP. CONSTRUCTED OF THE HIGHEST QUALITY LUGGAGE MATERIAL WITH SADDLE STITCHING WILL ACCOMMODATE EQUIPMENT IN A FULLY OPERATIONAL CONFIGURATION ALONG WITH MANUALS, WORKING PAPERS AND DISKS. NEVER A NEED TO REMOVE EQUIPMENT FROM CASE. SIMPLY REMOVE LID, CONNECT POWER AND OPERATE. LID CAN BE REPLACED AND LOCKED FOR SECURITY AND PROTECTION WITHOUT DISCONNECTING CABLES. FULLY TESTED.

- **AP101S Apple and Single Disk Drive $109**
- **AP102D Apple and Double Disk Drive 119**
- **AP103M Apple, 9 inch Monitor and Double Drive 129**
- **RS201 TRS-80, Expansion Unit and Double Drive 109**
- **RS202 TRS-80 Monitor and Accessories 84**
- **P401 Paper Tiger Printer 99**
- **P402 Line Printer II-Centronics 730 ..... 89**
- **CC90 Matching Attache Case 75**

master charge VISA®

COMPUTER CASE COMPANY
5650 INDIANA MOUND CT COLUMBUS OHIO 43213
(614) 868-9464

Circle 186 on inquiry card.

Circle 187 on inquiry card.

MNEMONIC	NAME
CALL	call subroutine
LCRAM	load color memory
LPIX	load pixel
LREG	load register
LSUB	load subroutine
LSYM	load symbol
MOV	move
RCRAM	read color memory
RET	return
RPIX	read pixel
RREG	read register
RSUB	read subroutine
RSYM	read symbol
SYM	display symbol
VEC	draw a vector
WAIT	wait

Table 2: *Quick reference guide to the primitives defined for Micrograph. Although the minimum set of instructions need only include a point-positioning primitive and a vector-drawing primitive, added flexibility of extra functions is used to remove processing burden from the host system.*

Listing 2 continued:

```
0345  C9
0346  1601
0348  1803
034A  CDA007
034D  DD360000
0351  DD360100
0355  CB4F
0357  200E
0359  1E01
035B  CB47
035D  2805
035F  DD7E03
0362  1803
0364  DD7E02
0367  CB43
0369  2003
036B  CDED01
036E  CB42
0370  2007
0372  CDEF07
0375  CB41
0377  2803
0379  CD390A
037C  DD3400
037F  20E6
0381  DD3401
0384  20E1
0386  C9
```

```
889                 RET                     ;RETURN
890   LPIX3:        LD    D,1               ;SET FULL FRAME FLAG
891                 JR    LPIX5             ;JUMP AROUND CASE
892   LPIX4:        CALL  CASE              ;FIND VIEWPORT CASE
893   LPIX5:        LD    (IX+GDR0),0       ;CLEAR X
894                 LD    (IX+GDR1),0       ;CLEAR Y
895                 BIT   1,A               ;TEST COLOR FOLLOWS
896                 JR    NZ,LPIX7          ;JUMP IF COLOR FOLLOWS
897                 LD    E,1               ;SET COLOR FLAG
898                 BIT   0,A               ;TEST COLOR TYPE
899                 JR    Z,LPIX6           ;JUMP IF PRIMARY COLOR
900                 LD    A,(IX+GDR3)       ;LOAD SECONDARY COLOR
901                 JR    LPIX7             ;JUMP TO LOOP
902   LPIX6:        LD    A,(IX+GDR2)       ;LOAD PRIMARY COLOR
903   LPIX7:        BIT   0,E               ;TEST COLOR FOLLOWS
904                 JR    NZ,LPIX8          ;JUMP IF COLOR PRESENT
905                 CALL  FETCH             ;GET DATA
906   LPIX8:        BIT   0,D               ;TEST FULL FRAME
907                 JR    NZ,LPIX9          ;JUMP IF FULL FRAME
908                 CALL  CLIP              ;CHECK FOR CLIP
909                 BIT   0,C               ;TEST SUCCESS
910                 JR    Z,LPIX10          ;JUMP IF CLIPPED
911   LPIX9:        CALL  POKE              ;POKE THE DATA
912   LPIX10:       INC   (IX+GDR0)         ;INCREMENT X
913                 JR    NZ,LPIX7          ;JUMP IF X NOT ZERO
914                 INC   (IX+GDR1)         ;INCREMENT Y
915                 JR    NZ,LPIX7          ;JUMP IF Y NOT ZERO
916                 RET                     ;RETURN
917   ;
918   ; LREG ***********************************************
919   ;
920   ; LREG LOADS A GRAPHIC DISPLAY REGISTER. IF GDR15 IS
921   ; SPECIFIED, A RESET OCCURS, SINCE THIS IS ESSENTIALLY
922   ; A READ ONLY REGISTER. OTHERWISE, LREG SETS A POINTER
923   ; TO THE APPROPRIATE REGISTER AND READS IN THE DATA.
924   ;
925   ; CALLS         FETCH
926   ;
927   ; CALLED BY     PRIMAT  (INDIRECTLY)
928   ;
929   ; REGISTERS     A       (PRIMITIVE OP CODE, TEMPORARY)
930   ;               D       (TEMPORARY)
```

Text continued from page 278:

features, such as clipping and anti-aliasing, can be readily implemented at the primitive level without the addition of other instructions. Such features can be treated as system parameters, selectable through the load-register primitive. In figure 5, a sample of the images produced by these primitives is shown. (Also see listing 1.)

One last item that must be discussed is error processing. For any implementation of the primitives, the display processor must be able to detect, report, and possibly recover from errors such as invalid primitives or an error in a called user subroutine. Of course, this error processing is highly implementation-dependent, but does not affect the structures of our primitives. However, several of these primitives can be used to aid the host computer in error processing, such as the read-register and read-pixel primitives.

So far the characteristics of interactive computer-graphics systems have been examined, focusing on a comparison of the features of calligraphic and raster-scan display processors. A set of primitive instructions for the control of a color raster-scan display processor have been developed.

Next month, Part 2 of this article will concern the hardware design of Micrograph, a microprocessor-based peripheral which implements these primitives. ■

References

1. "Chip Controls CRT Attributes." *Electronics*, June 1978.
2. "Chip Generates 16 Colors." *Electronics*, November 1978.
3. "Color Displays to Pace Computer Graphics Market." *Mini-Micro Systems*, February 1979.
4. *Computer*, IEEE Society, January 1979.
5. *Computer Graphics*, SIGGRAPH-ACM, June 1978.
6. Course notes from "Computer Graphics" taught by Dr Steven Levine, Lawrence Livermore Laboratory, Anaheim CA, October 1978. They are available from Integrated Computer Systems Inc, 3404 Pico Blvd, Santa Monica, CA.
7. Crow, Franklin W. "The Aliasing Problem in Computer Generated Shaded Images." *Communications of the ACM*, November 1977.
8. Denning, P J. *ACM Computing Survey*, December 1978. This is a special issue on graphics standards.
9. James, L P. "An Engineering Survey of Graphics Display Systems." An unpublished Computer Science Corporation (Vandenberg AFB) document, March 1979.
10. Judice, Charles N. "Processing Signals for Digital Display." *Bell Laboratory Record*, Bell Telephone Laboratory, March 1976.
11. Manufacturers' literature from "Computer Graphics" course taught by Dr Steven Levine. See reference 6 above.
12. Newman, W, and R. Sproull, *Principles of Interactive Computer Graphics*. New York: McGraw-Hill, 1973.
13. Schrack, G F. "Current Literature in Computer, Graphics and Interactive Techniques." *Computer Graphics*, SIGGRAPH-ACM, December 1978.
14. Walker, B, S; Gurd, J, R; and Drawnek, E, A. *Interactive Computer Graphics*. New York: Crane Russak, 1973.

BYTE's Bugs

Feeling Listless

The performance of a program in the Technical Forum "Some More on Performance Evaluation," by Carl Helmers (July 1980 BYTE, page 216) suffered from one error of substitution and one error of omission.

Listing 1 on page 217, a program submitted by Charles Porter, should contain two lines as follows:

```
105 IF X = L THEN 120
110 IF A(X) = 0 THEN 100
    ELSE 90
```

Thanks to Martin Berman of Teaneck, New Jersey, for pointing this out. ■

Omikron's Accounting Software

We made our reputation with our Mapper systems. One year ago we told TRS-80 Mod I owners that they could have standard CP/M, 8" drives, compatibility with the Mod II, the ability to transfer files from TRSdos to CP/M or run Newdos80, the TRSdos compatible operating system, with 8" and 5" drives all on line at once. Most of the readers said "too good to be true" and it was only the slowly spreading word (plus some excellent reporting —see August Byte column by Jerry Pournelle) that convinced you it worked.

Here we go again! **A field-proven, fully integrated accounting package with self-instructive documentation for $350.00.** Too good to be true? A General Ledger which has been running in the real world long enough to shake out the bugs and has sold for many times our price of $100.00. Too good to be true? Ok, if we have to, we can wait for the word to spread. But just to get the ball rolling—let me give you the particulars:

REQUIREMENTS:
Computer — 48K z80/8080
Printer — 132 columns
Video — 80 x 24 or 16 x 64 w/scrolling
Storage — 2 disk units 250 kbytes each
Language — Microsoft Basic
O/S — CP/M

BENEFITS: This is not another re-write of the Osborne packages but a professionally produced and marketed set of accounting software originally produced for the Mits/Altair machine. It has been tested and debugged in actual use. It comes with sample data and a manual designed for self-instruction. They are thoughtfully designed, interactive programs with clear prompts for ease of operation. Source code and documentation to aid in customization are also included.

INTERESTED? Write or call for our free brochure. It may sound too good to be true, but we've heard that before. Risk a stamp—our Mapper customers were glad they did.

Too good to be true?



*CP/M is a TM of Digital Research. TRS-80 is a TM of Tandy Corporation.


Circle 188 on inquiry card.

Mark of the Unicorn

presents:

Amethyst

a multi-faceted text processing system



Amethyst is a user-extensible text processing system based on MIT Emacs. Its powerful yet easy-to-learn command set provides convenient screen editing of both programs and documents. The Amethyst command set can be added to or modified to suit personal preferences.

Amethyst, first of the Gemstones, is a professionally crafted program in a series that represents a firm commitment to user support. Ongoing program updates, a newsletter, and a telephone hotline for bug fixes and custom code modifications, are an integral part of each Gemstone. Documentation for Amethyst includes not just multiple user's manuals, but also a program logic manual and related theoretical materials.

A 48k CP/M® with a cursor addressable display is required. Amethyst is written in C, and the BDS C compiler is included to provide for simple reconfiguration of the system. Amethyst is available on 8" soft sector diskettes; other formats soon.

PO Box 423
Arlington, Massachusetts 02174
617-498-1387

$350

CP/M is a registered trade mark of Digital Research

Circle 189 on inquiry card.

779 UPPER CASE/lower case "Conversion Kit I"

Expand the capabilities of your 779 line printer to include word processing!! Available to all Centronics 779 and TRS 80 Printer I owners is the option of lower case and changing slash 0 Zero to standard 0. No etch cuts or soldering needed. Installs in minutes with a screwdriver. No program modification or additional interface is required. **Price $125.00**

UPPER/LOWER CASE NOW AVAILABLE FOR THE FOLLOWING CENTRONICS PRINTERS:
101AL, 102BL, 306, 500, 501, 503, 700, 701, 702, 703, 780, 781.

Motor Control "CONVERSION KIT II"

FOR ALL CENTRONICS 779 & TRS 80 PRINTER I LINE PRINTERS!!

Our "Conversion Kit II" Motor Controller gives your 779 the ability to turn the motor on and off automatically. Removes the annoying noise of constant run, increasing the life span of your 779 and TRS 80 line printer motor! No soldering, software or hardware changes needed. Installs easily. **Price $95.00**

SAVE! Buy Service Technologies "Conversion Kit I" and "Conversion KIt II" together for the single price of **$199.00**

To order, please send check or money order in the proper amount to:

Service Technologies, Inc.
32 Nightingale Rd.
Nashua, N.H. 03062
(603) 883-5369

Visa and Master Charge accepted (please include signature, expiration date and phone number).

Circle 190 on inquiry card.

THE ORIGINAL MAGAZINE FOR OWNERS OF THE TRS-80™* MICROCOMPUTER

SOFTWARE FOR TRS-80™ OWNERS

H&E COMPUTRONICS INC.

MONTHLY NEWSMAGAZINE FOR TRS-80™ OWNERS

MONTHLY NEWSMAGAZINE
Practical Support For Model I & II

- PRACTICAL APPLICATIONS
- BUSINESS
- GAMBLING • GAMES
- EDUCATION
- PERSONAL FINANCE
- BEGINNER'S CORNER
- NEW PRODUCTS
- SOFTWARE EXCHANGE
- MARKET PLACE
- QUESTIONS AND ANSWERS
- PROGRAM PRINTOUTS

. . . . AND MORE

PROGRAMS AND ARTICLES PUBLISHED IN OUR FIRST 12 ISSUES INCLUDE THE FOLLOWING:

- A COMPLETE INCOME TAX PROGRAM (LONG AND SHORT FORM)
- INVENTORY CONTROL
- STOCK MARKET ANALYSIS
- WORD PROCESSING PROGRAM (FOR DISK OR CASSETTE)
- LOWER CASE MODIFICATION FOR YOUR VIDEO MONITOR OR PRINTER
- PAYROLL (FEDERAL TAX WITHHOLDING PROGRAM)
- EXTEND 16-DIGIT ACCURACY TO TRS-80™ FUNCTIONS (SUCH AS SQUARE ROOTS AND TRIGONOMETRIC FUNCTIONS)
- NEW DISK DRIVES FOR YOUR TRS-80™
- PRINTER OPTIONS AVAILABLE FOR YOUR TRS-80™
- A HORSE SELECTION SYSTEM***ARITHMETIC TEACHER
- COMPLETE MAILING LIST PROGRAMS (BOTH FOR DISK OR CASSETTE SEQUENTIAL AND RANDOM ACCESS)
- RANDOM SAMPLING***BAR GRAPH
- CHECKBOOK MAINTENANCE PROGRAM
- LEVEL II UPDATES***LEVEL II INDEX
- CREDIT CARD INFORMATION STORAGE FILE
- BEGINNER'S GUIDE TO MACHINE LANGUAGE AND ASSEMBLY LANGUAGE
- LINE RENUMBERING
- AND CASSETTE TIPS, PROGRAM HINTS, LATEST PRODUCTS

COMING SOON (GENERAL LEDGER, ACCOUNTS PAYABLE AND RECEIVABLE, FORTRAN-80, FINANCIAL APPLICATIONS PACKAGE, PROGRAMS FOR HOMEOWNERS, MERGE TWO PROGRAMS, STATISTICAL AND MATHEMATICAL PROGRAMS (BOTH ELEMENTARY AND ADVANCED) . . . AND

FREE

WORD PROCESSING PROGRAM (Cassette or Disk) For writing letters, text, mailing lists, etc., with each new subscriptions or renewal.

LEVEL II RAM TEST (Cassette or Disk) Checks random access memory to ensure that all memory locations are working properly.

DATA MANAGEMENT SYSTEM (Cassette or Disk) Complete file management for your TRS-80™

CLEANUP (Cassette or Disk) Fast action Maze Game

ADVENTURE (Cassette or Disk) Adventure #0 by Scott Adams (From Adventureland International)

FREE

* TRS-80™ IS A TRADEMARK OF TANDY CORP.

SEND FOR OUR NEW 48 PAGE SOFTWARE CATALOG (INCLUDING LISTINGS OF HUNDREDS OF TRS-80™ PROGRAMS AVAILABLE ON CASSETTE AND DISKETTE). $2.00 OR **FREE** WITH EACH SUBSCRIPTIONS OR SAMPLE ISSUE.

H&E COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE™

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

master charge

24 HOUR ORDER LINE
(914) 425-1535

VISA

NEW TOLL-FREE ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

ONE YEAR SUBSCRIPTION $24 .....
TWO YEAR SUBSCRIPTION $48 .....
SAMPLE OF LATEST ISSUE $ 4 .....
START MY SUBSCRIPTION WITH ISSUE .....
(#1 - July 1978 • #7 - January 1979 • #12 - June 1979 • #18 - January 1980)
NEW SUBSCRIPTION ..... RENEWAL .....

NEW!!!
MOD-II NEWSLETTER
$12/year (or 12 issues)

CREDIT CARD NUMBER _____ EXP. DATE _____

SIGNATURE _____

NAME _____

ADDRESS _____ CITY _____ STATE _____ ZIP _____

*** ADD $6/YEAR (CANADA, MEXICO) - ADD $12/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO ***

Circle 191 on inquiry card.

H&E COMPUTRONICS INC.

•••EVERYTHING FOR YOUR TRS-80™•••

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

★ *All Orders processed within 24-Hours*
★ *30-Day Money Back Guarantee on all Software (less a $3 penalty for handling)*
★ *10-Day Money Back Guarantee on Disk Drives and Printers* **PLUS** *120-Days Free Service*

- **LEARNING LEVEL II** By David Lien
  The Original Author Of The Level Manual
  A Step By Step approach to Learning Level II especially geared to new TRS-80™ Owners **$15.95**

- **TRS-80™ DISK AND OTHER MYSTERIES**
  Over 100 pages of indespensible information for disk owners. Learn to recover information from bad disks, how to make Basic programs unlistable and 12 more chapters of never published tips and information. Written by H.C. Pennington.
  (For all Disk Owners). **$22.50**

NEW SBSG BUSINESS SYSTEM FOR MODEL I OR MODEL II - IN STOCK
- General Ledger
- Accounts Receivable
- Accounts Payable
- Payroll
- Inventory Control with Invoicing

- Each module can be operated individually or as a coordinated **SYSTEM.** Turn-Key error catching operation for beginners.
- Complete manual and documentation accompany each program.
- Minimum System requirements 2-Disk Drives for Model I...1-Disk Drive for Model II
- Each module can be formatted to span data on up to 4-Disk Drives
- Free 30-Day telephone consultation
- Call for complete specifications
- Model I Version **$125.00** Per Module, **$495.00** Per System
- Model II Version **$225.00** Per Module, **$995.00** Per System

DATA MANAGEMENT SYSTEMS
- DMS replace index cards or any data requiring long lists of information.
- TBS In-Memory Information System (For Cassette Systems) **$39.95**
- TBS Disk Data Manager (Requires 1 or more disk drives)...Set up fast random access, files in minutes. Stores up to 320K of information on 4 Drives. Up to 10 fields and 255 characters per record. Supports upper and lower case. RS-232 or TRS-232...Features complete editing **$49.50**
- Personal Software CCA Data Management System...Completely user oriented, menu drive, 130 page Step By Step Manual...Capable of inventory control, sorting data, reporting data in nearly any form (for reports and mailing labels). Sorts data by up to 10 fields for zip code, balance due, geographic location or whatever. Prints reports with subtotals and totals automatically calculated. Fast random access **$75.00**

FROM RACET COMPUTES
- **REMODEL-PROLOAD** - Renumbers program lines, combines programs. The only renumber program that will renumber the middle of a program. Specify 16K, 32K or 48K. Works with Cassette or Disk **$34.95**
- **GSF** - Use in your Basic Programs for Instant Sorting (will sort 1000 items in 9 seconds). Other commands include Compress and Uncompress Data. Duplicate Memory, Display Screen Controls and Fast Graphic Controls **$24.95**
  (For Cassette or Disk, specify 16K, 32K or 48K).
- **DOSORT** - All G.S.F. commands plus special Multiple Disk Sorting Routines **$34.95**
  (Specify 32K or 48K)
- **INFINITE BASIC** - Adds 70 commands to your TRS-80™ including Instant Sort, Matrix Commands, String Commands, Left and Right Justification, String Centering, Simultaneous Equations, Upper and Lower Case Reverse and more. (For Cassette or Disk) **$49.95**
- **INFINITE BUSINESS** (Requires Infinite Basic) Eliminate Round-off error, 127-Digit Calculation Accuracy, Insert New Elements in Sorted Arrays, Automatic Page Headings, Footings and Pagination, Multiple Precision Arithmetic and more. (For Cassette or Disk) **$29.95**
- **COPSYS** - Copy Machine Language Programs (For Cassette Only) **$14.95**
- **DSM** (Disk Sort Merge) **$75.00**

FROM SMALL SYSTEM SOFTWARE
- **RSM-2** Machine Language Monitor **$26.95**
- **RSM-2D** Disk Version of RSM-2 **$29.95**
- **DCV-1** Converts Machine Language Programs from tape to disk **$9.95**
- **AIR RAID** - The ultimate TRS-80™ game converts your TRS-80™ into a real time shooting gallery **$14.95**
- **BARRICADE** - A fast pong style game **$14.95**
- **CPM** - (For Disk Only) **$150.00**
- **TRS-232 INTERFACE** - Interface with Software driver RS-232 printers to your TRS-80™ **$49.95**
- **TRS-232 FORMATTER** - Additional (optional) Software for TRS-232 owners. Adds many printer commands to your TRS-80™ **$14.95**
  (With purchase of TRS-232) **$9.95**
- **PENMOD** - Use the Electric Pencil with RS's lower case modification **$19.95**

FROM GALACTIC SOFTWARE
- **MAIL PAC** - For Model I Disk Systems only **$99.95**
  Quick-sorting full user control over mailing list from Galactic Software.
- **STOCK MARKET PAC** **$99.95**

FROM APPARAT NEW DOS + **$99.95**
35, 40 and 77 Track Versions available.
- **NEW DOS/80** (With variable record length files, chainings and many other features **$149.95**

FROM THE BOTTOM SHELF
- **CHECKBOOK II** (For Cassette or Disk) **$39.95**
- **SYSTEM DOCTOR** (A complete diagnosis of your TRS-80™...Checks memory, video, cassette, disk, ROM, and all other parts of your system)
  For Cassette or Disk **$28.50**
- **CHECKBOOK REGISTER ACCOUNTING SYSTEM** (Requires 2 disk drives) **$75.00**
- **LIBRARY 100** - 100 established business, game and educational programs plus **FREE** Tiny Pilot all for **$49.50**
- **BASIC TOOL KIT** - Lists all variables, GOTO's and GOSUB's in your program **$19.80**

- **SOUNDWARE** - Adds sound to your TRS-80™ Just plus it in **$29.95**
  Sample programs included.
- **TING TONG** - Can be used with Soundware for a **Sound** version of pong **$9.95**

- **VIC - The Carta Visual Instructional Computer Program** **$19.95**
  The Level II 16K Cassette is designed to teach beginners the Basics of Machine Language and Assembly Language Programming. See every Machine Language Instruction Display on your video. VIC includes Step By Step 55 page manual

VISTA V80 DISK DRIVE - 110K of Storage **$395.00**
Add $29.95 for Cable (Free with purchase of 2-Disk Drives). 10 day money back guarantee.

FROM HOWE SOFTWARE
- **MON-3** - Machine Language Programming for beginners. MON-3 is a complete System Monitor with Users Manual **$39.95**
- **MON-4** - Disk Version of MON-3 **$49.95**

FROM MICROSOFT
- **LEVEL III BASIC** **$49.95**
  Now Cassette owners can add Disk Commands to their TRS-80™ without owning a Disk Drive
- **MICROSOFT DISK ADVENTURE** **$29.95**
- **TRSDOS BASIC COMPILER** **$195.00**
  Run Basic Programs up to 15 times faster.

- **NEC BUSINESS QUALITY PRINTERS** (For MOD-I or MOD-II) **$2,995.00**

THE ELECTRIC PENCIL
Cassette **$99.95**
Disk **$150.00**
MOD-II Version **$325.00**

- **HORSE SELECTOR II** By Dr. Hal Davis
  The TRS-80™ version updated for the TRS-80™ and originally reviewed in Systems and Methods **$50.00**

•••EVERYTHING••• FOR MOD-II OWNERS

NEW MOD-II NEWSLETTER	
MOD-II Catalog **Free** w/subscription	**$12/year**
MAIL PAC	**$199.95**
MICROSOFT BASIC COMPILER	**$395.00**
MICROSOFT BASIC	**$325.00**
GSF SORT ROUTINE	**$50.00**
CP/M	**$170.00**
PEACHTREE BUSINESS SOFTWARE	**Call**
WORD STAR	**$495.00**

H&E COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE™

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

HOURS: 9-5
Monday thru Saturday

48-Page Catalog $2 **FREE** *With Any Order*
Order By Phone Or Mail
Add $1 Per Order For Shipping Within UPS Areas
Add $3 For C.O.D.
Add $3 For All Foreign And Non-UPS Shipments
Add $3 For UPS Blue Label

master charge

24 HOUR ORDER LINE

VISA

(914) 425-1535

NEW TOLL-FREE ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

Circle 191 on inquiry card.

A General Interpolating Graphics Package for the TRS-80

D K Cohen and Devon Crowe
Bell Technical Operations Corp
1050 E Valencia Rd
Tucson AZ 85706

If you've ever tried creating graph displays with the Radio Shack TRS-80, then you know that the task can be time-consuming. If you haven't tried, you can look forward to the fact that axes must be generated and labelled, and data must be plotted using the awkward screen coordinates of Level II BASIC. After all this has been done, the resulting graph usually is not continuous, but has annoying *holes* in it. But don't despair, because with our simple package that may be implemented as a subroutine plotting X, Y coordinate relations or geometric figures is easy.

In order to use this plotting package effectively, we suggest that you work through each example given. After implementing this package, TRS-80 users should be able to plot any analytic function or set of x and corresponding y values efficiently. This package will allow you to draw axes in the correct quadrant(s) and label them with chosen titles. Tic marks displayed at user-determined intervals, and maximum and minimum values displayed at the correct positions on the graph are also easy to accomplish.

Basic Plotting

The plotting package is divided into two subroutines. The interpolating subroutine (see listing 1) plots the function (or coordinate pairs), interpolating between the points to produce a continuous curve. The resulting curve may be easily displayed at any position of the screen by changing at most four parameters. The program takes care of all scaling problems, and parameters are specified through the use of additional BASIC statements inserted at the front of the subroutine.

> With this package, TRS-80 users should be able to plot any analytic function.

To begin this demonstration, suppose you desire to plot the cost of heating a home as a function of the monthly period, displayed in the upper right-hand corner of the screen. (This is done to leave space for other information you may desire to display.) In order to have the graph confined to the desired position, you must specify a *viewport*. For this plotting routine, consider the screen to be divided into one hundred horizontal units and forty vertical units. The bottom left corner corresponds to the screen coordinate (0,0). (See figure 1.) To display the graph in the right-hand corner, the horizontal coordinates should be from 50 to 100, and the vertical coordinates should be from 20 to 40. Thus, to set this viewport, the reader must specify the four variables, Z1, Z2, W1, W2. For this example the viewport variables should be set as follows:

```
Z1 = 100
Z2 =  50
W1 =  40
W2 =  20
```

The next step is to set up the x and corresponding y arrays. For example, if during the month of January the heating cost was $80, the first x element would be 1 (for the month) and

Are you ready for the Z8000 microprocessor revolution?

Zilog's generation-ahead, 16-bit, Z8000 is changing the way systems manufacturers and designers think about microprocessing. Now there's an easy way for you to learn everything you need to know to stay on top of this powerful new technology. Enroll today in Zilog's five-part, home-study seminar on Z8000 architecture for the advanced engineer.

Learn the details of the Z8000's 16-bit architecture, techniques of memory management, methods for interfacing memory and peripherals, proper handling of interrupts and traps, and use of the Z8000's powerful instruction set.

You study at your own pace at home. Each test is individually graded and critiqued. Total cost for all course materials and tests is $39. Enroll today. Become your company's expert on the microprocessor technology of the future. Upon completion of the course, every registrant gets a colorful Captain Zilog T-shirt! Allow four weeks for receipt of your first lesson.

Zilog


An Affiliate of EXXON ENTERPRISES INC.



Zilog
Training and Education Department C2
10460 Bubb Road, Cupertino, CA 95014

Enroll me today in the 1980 Zilog Z8000 Architecture Course.
☐ Enclosed is my check or money order for $39.
Make check payable to: Zilog, Inc.
Please charge my ☐ Mastercharge or ☐ Visa account:
☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐
Expiration date_____
SIGNATURE
My T-Shirt size is: S M L XL


BUSINESS ADDRESS
NAME_____
COMPANY NAME_____
ADDRESS_____
CITY/STATE/ZIP_____
TELEPHONE_____
BILLING ADDRESS (as shown on charge card.)
NAME_____
COMPANY NAME_____
ADDRESS_____
CITY/STATE/ZIP_____
Mail lessons to: ☐ Business Address ☐ Billing Address



Boards for S-100 BUS from S.C. Digital

"CPUI-Z80"
Adranced Z80A based CPU board
$219 Assembled and Tested
$149 Kit *(less Interrupt)

Features: Model CPUI-Z80
● 2/4 Mhz SW selectable. ● Built in 8 Prioritized Vectored Interrupts with 8 possible levels of Nested Interrupts using powerful Mode 2 of Z80, all done in Hardware, expandable with external ckt. ● Vector Jump on RESET, in 4K increments. ● Supports 2K of EPROM (not supplied), DMA, dynarmic RAM refresh . . . many more.
*Kit comes with all parts except chips connected to Interrupts.



"INTERFACE: 1"
I/O, Memory Interface Board

$229 Assembled and Tested
$169 Kit

Features: Model 3SPC
● 3 Serial w RS232C or 20ma Current Loop, 1 Parallel. ● 4K of EPROM/ROM and 4K of RAM (ROM/RAM not supplied). ● Built in Kansas City Standard Cassette interface usable to 1200 Baud. ● Generates all popular baud rates up to 19.2K baud, including 110 & 134.5. ● SW settable Address, Baud Rates, Ports.

"UNISELECT" **16K Static RAM** with universal Bank Select
Model 16KUS $255 A & T, with 200 nsec memory chips.

All boards meet IEEE-S100 standards. Fully socketed, solder masks, gold contacts, and guaranteed for one full year. Kit guaranteed parts, only.
Delivery: from stock to 72 hours. **Ordering:** You may call for M.C., Visa or C.O.D. orders. (Add $4.00 for C.O.D.) Personal checks o.k., but M.O. speeds shipment. Takes 7 to 15 days to clear personal checks before shipping.
Undamaged boards can be returned within 10 days for full refunds. Illinois residents add 5¼% sales tax.


O.E.M. PRICING AVAILABLE, DEALER INQUIRY INVITED

S.C. Digital P.O. Box 906 Aurora, IL 60507 Phone: (312) 897-7749

DISK DRIVE WOES? PRINTER INTERACTION? MEMORY LOSS? ERRATIC OPERATION? DON'T BLAME THE SOFTWARE!



ISO-1



ISO-2

Power Line Spikes, Surges & Hash could be the culprit! Floppies, printers, memory & processor often interact! Our unique ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

***ISOLATOR (ISO-1A) 3 filter isolated 3-prong sockets; integral Surge/Spike Suppression; 1875 W Maximum load, 1 KW load any socket $56.95**
***ISOLATOR (ISO-2) 2 filter isolated 3-prong socket banks; (6 sockets total); integral Spike/Surge Suppression; 1875 W Max load, 1 KW either bank $56.95**
***SUPER ISOLATOR (ISO-3), similar to ISO-1A except double filtering & Suppression $85.95**
***ISOLATOR (ISO-4), similar to ISO-1A except unit has 6 individually filtered sockets $96.95**
***ISOLATOR (ISO-5), similar to ISO-2 except unit has 3 socket banks, 9 sockets total . . . $79.95**
***CIRCUIT BREAKER, any model (add-CB) Add $ 7.00**
***CKT BRKR/SWITCH/PILOT any model (-CBS) . . . . . Add $14.00**

PHONE ORDERS 1-617-655-1532

ESP Electronic Specialists, Inc.
171 South Main Street, Natick, Mass. 01760
Dept. BI

the y element would be 80 (for the cost). Table 1 is a hypothetical set of data to be graphed. The arrays that will contain the data are AX and AY. Thus, for this example, the following BASIC statements should be inserted at the beginning of the subroutine:

```
FOR I=1 TO 12
READ AX(I)
READ AY(I)
NEXT I
DATA 1,80,2,90,3,75,4,50,5,
     45,6,45,7,50,8,80,
     9,70,10,65,11,70,12,80
```

The next variables specify the dimension of the arrays to be graphed. In this example, the minimum dimension TI is 1, the maximum dimension TA is 12, and the separation between the array points IN to be plotted is 1. (For example, if you wanted to plot the cost of heating for every other month, IN would be 2.) Therefore, you must include the following BASIC statements:

```
TI =  1
TA = 12
IN =  1
```

The final variable to be specified, S1, determines the *resolution*, or how well the points are connected in the graph. The value of S1 needed to fully connect all the points depends strongly on the size of the viewport and the number of array points to be plotted. A little experimentation with S1 is necessary to obtain the desired effect. For this demonstration: S1=0.01. After specifying the parameters above, the user is now ready to run the program.

After execution, the results should be as presented in figure 2. To change the viewport, simply change the values in the viewport variables. Figure 3 shows the result when the viewport variables are as follows:

```
Z1 = 100
Z2 =   0
W1 =  40
W2 =   0
```

If you desire to plot the cost of heating for every other month, simply change IN to 2. The results of this change are shown in figure 4.

Adding Axes

At this point, it would be nice to have the axes drawn and labeled. This can be done by specifying four axis parameters for use by the axis-drawing subroutine in listing 2. The first two parameters to be defined are the string variables AX$ and AY$, which define the x axis and the y axis labels respectively. For this example the x axis should be labeled "month" and the y axis should be labeled "cost." Thus, the two BASIC statements that must be executed are:

```
AX$ = "MONTH"
AY$ = " COST"
```

The final two parameters specify the separation of the tic marks on the axes. In the example, set C1 (the x-axis tic-mark-separation variable) to 1 for a tic mark every month. Set C2 (the y-axis tic-mark-separation variable) to 5 for a tic mark at every $5.00 increment. Thus, the following BASIC statements must be executed:


```
C1 = 1
C2 = 5
```

After execution, the results should be

Text continued on page 310

You can extend the usefulness and data entry speed of your TRS-80 by giving it the graphics and menu capabilities of the Bit Pad One digitizer.

With the Bit Pad and proper software, you can generate schematic diagrams; describe sales curves to your computer; enter alphanumeric information by merely touching printed letters on a menu, or enter order or inventory information by merely checking boxes on printed forms.




Bit Pad One, complete with stylus, specially designed plug-in TRS-80 interface and power supply cost just slightly over $1,000.

If you don't have a digitizer, you are restricting your TRS-80's abilities. We'll gladly send you a list of distributors who have the Bit Pad One.

Summagraphics® corporation
35 Brentwood Avenue, Fairfield, CT 06430, (203) 384-1344

Now, Bit Pad One™ digitizer makes it easy to add graphics capability to your TRS-80!

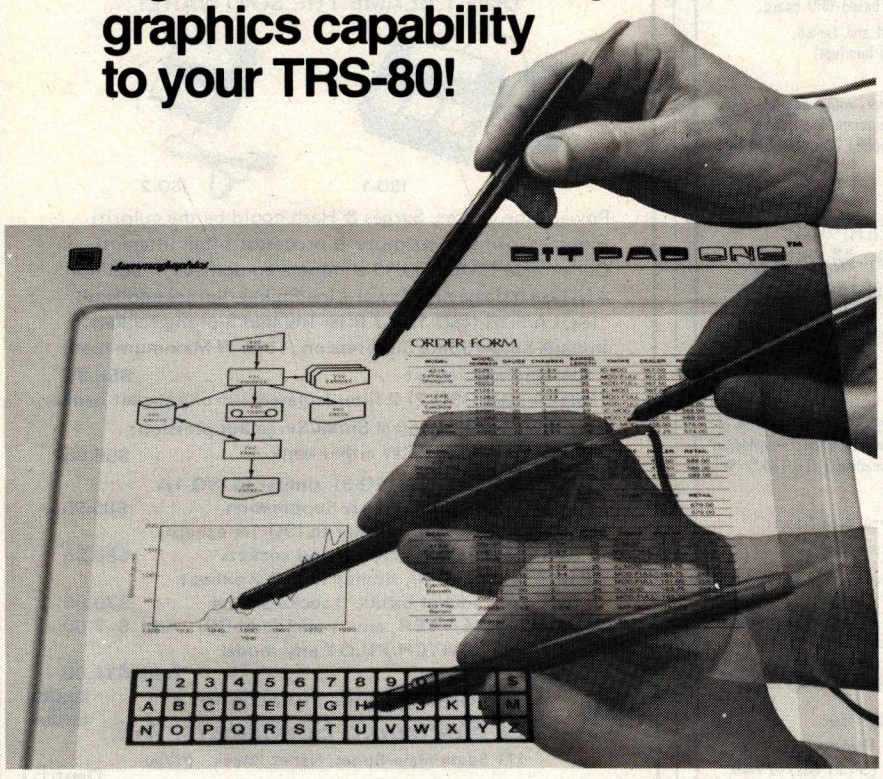

Circle 195 on inquiry card.

Circle 196 on inquiry card.

A REFURBISHED ASCII TERMINAL OFFERED FOR THE FIRST TIME TO SMALL BUSINESS AND PERSONAL COMPUTER USERS.

The AJ 630. For just $495* you can have a quiet thermal printer terminal.

Now, for less than the price of a good electric typewriter, you can have your own personal ASCII printer terminal.

And the AJ 630 gives you a lot of features for interactive timesharing, data entry/retrieval, and communications.

- A wide carriage—up to 140 characters per line
- Built-in lamp for paper illumination
- Upper and lower case characters
- 128-character ASCII code set
- RS-232C interface
- Selectable 110, 150, or 300 bps operation
- Desktop portability
- 30-day warranty on parts and labor



Perhaps best of all, the AJ 630 is *quiet*. You can use it anywhere without disturbing anyone—in the office or at home. And we'll make it easy for you to pay—with cash, certified check, Master Charge, or Visa.

Call toll-free for more information and details on our 10-day money back guarantee:**

800/538-9721

California residents call collect 408/263-8520, Extension 275.

* Plus $50 for transportation, terminal checkout, and one 15" four hundred foot roll of paper.
**Excluding checkout charge of $50.

ANDERSON JACOBSON

See Us At COMDEX'80 November 18-21, 1980 Las Vegas Convention Center

MARKET CHARTER™



STOCK CHARTING ON YOUR APPLE II*

- High-Low-Close Bar Charts
- Simple, Exponential, Weighted Averages
- Trendlines, Resistance Lines, etc.
- Volume Charts with average volume
- Hard Copy of the Charts and Data
- Comparison Charts
- Weekly & Daily Stock Histories available
- User Oriented
- User can create and update the Data base
- Many Satisfied Users

MARKET CHARTER Retails for **$129.95**. Manual, Demo Diskette and Stock Histories are available separately. Call or write for information on new offering in the financial field.

RTR SOFTWARE, INC.


DEPT. B-11
1147 BALTIMORE DR.
EL PASO, TEXAS 79902
(915) 544-4397

*TRADEMARK OF APPLE COMPUTER, INC.

DISCOUNT PRICES

Microcomputers & Peripherals

BITS
YTES
OOKS
ARGAINS



Cromemco • SWTPC • Lear-Siegler
Hazeltine • RCA • North Star
Verbatim • Perkin Elmer and others

Fast, off the shelf delivery.
Call TOLL FREE 800/523-5355

MARKETLINE SYSTEMS, Inc.
2337 Philmont Ave., Huntingdon Valley, Pa. 19006
215/947-6670 • 800/523-5355
Dealer Inquiries Invited

Circle 197 on inquiry card.

Circle 198 on inquiry card.

Listing 1: *The interpolating subroutine. Written in TRS-80 Level II BASIC, this routine plots points on the screen from an array specified by the user. BASIC statements are inserted before the routine is run to create the desired array and, thus, the desired image.*

```
10000 Z2=Z2+25
10005 W2=W2+5
10010 IF Z2>Z1 THEN Z3=Z2 ELSE GOTO 10025
10015 Z2=Z1
10020 Z1=Z3
10025 IF W2>W1 THEN W3=W2 ELSE GOTO 10040
10030 W2=W1
10035 W1=W3
10040 Y1=-1.0E38
10045 Y2=1.0E38
10050 X1=Y1
10055 X2=Y2
10060 FOR I=TI TO TA STEP IN
10065 IF Y1<AY(I) THEN Y1=AY(I)
10070 IF Y2>AY(I) THEN Y2=AY(I)
10075 IF X1<AX(I) THEN X1=AX(I)
10080 IF X2>AX(I) THEN X2=AX(I)
10085 NEXT I
10090 IF Y1=Y2 THEN Y1=1.001*Y1
10095 IF X1=X2 THEN X1=1.001*X1
10100 A=(X1-X2)/(Z1-Z2)
10105 B=(Y1-Y2)/(W1-W2)
10110 FOR I=TI TO TA STEP IN
10115 SET((Z2+(AX(I)-X2)/A), (47-((AY(I)-Y2)/B+W2)))
10120 Q=I+IN
10125 IF Q>TA GOTO 10165
10130 IF AX(I)>AX(Q) THEN SS=-S1 ELSE SS=S1
10135 FOR J=AX(I)TO AX(Q) STEP SS
10140 IF AX(I)=AX(Q) THEN AX(Q)=1.001*AX(Q)+.0000001
10145 Y3=((AY(Q)-AY(I))/(AX(Q)-AX(I)))*(J-AX(I))+AY(I)
10150 SET((Z2+(J-X2)/A),(47-((Y3-Y2)/B+W2)))
10155 NEXT J
10160 NEXT I
10165 RETURN
```


FREE* OSBORNE/McGraw-Hill *Buy 2 get 1 free

DISCOUNT SOFTWARE

Ad#7 with new items

P.S.—We want to be your software source. Give us the opportunity to beat any nationally advertised price!

CP/M users: specify disk systems and formats. Most formats available.

CP/M	DISK WITH MANUAL	MANUAL ONLY
OSBORNE ¶		
General Ledger #	$ 59	$20
Acct Rec/Acct Pay #	$ 59	$20
Payroll w/Cost #	$ 59	$20
Buy 2 get 1 free	$118	$57
All 3 & CBASIC2	$199	$71
DIGITIAL RESEARCH®		
CP/M® 2.2 Northstar	$149	$25
CP/M® 2.2 Cromemco	$189	$25
CP/M® (other versions)	Call	
PL/I-80	Call	
Mac	$ 85	$15
Sid	$ 85	$15
Z-Sid	$ 95	$15
Tex	$ 70	$15
Despool	$ 50	$10
MICROSOFT		
Basic-80	$289	$30
Basic Compiler	$324	$30
Fortran-80	$384	$30
Cobal-80	$594	$30
Mu Math	$224	$30
Mu Lisp	$169	$25
MICRO DATA BASE SYSTEMS		
HDBS	$250	$40
MDBS	$750	$40
Other	Call	
S.O.F.T.W.A.R.E.		
Microtax®‡		
Federal individual	$749	$50
Federal corporate	$249	$25
State individual	$249	$25
C.P.A. Plus		
Client Write-up	$995	$95
Time billing	$995	$95
Business Plus‡		
General Ledger	$ 79	$25
Accounts Receivable	$ 79	$25
Accounts Payable	$ 79	$25
Payroll	$ 79	$25
All 4	$269	$99
SUPERSOFT		
Forth (8080 or Z80) ¶	$129	$25
Diagnostic I	$ 49	$20
Other disk software	less 10%	
SOFTWARE WORKS		
Adapt	$69	
Ratfor	$86	

COMPUTER PATHWAYS	
Pearl (level 1)#	$ 99/$25
Pearl (level 2)#	$299/$25
Pearl (level 3)#	$549/$25
MICROPRO	
Word-Star (Ver. 2.0)	$349/$40
Word-Star /Mail-Merge	$489/$65
DataStar	$279/$35
Word-Master	$119/$25
SuperSort I	$199/$25
SuperSort II	$169/$25
SuperSort III	$119/$25
PEACHTREE® ¶	
General Ledger‡	$449/$45
Accts Receivable‡	$449/$45
Accts Payable‡	$449/$45
Payroll‡	$449/$45
Inventory‡	$499/$45
Property Mgt.‡	$899/$45
C.P.A. Client Write-up‡	$899/$45
Mailing Address‡	$399/$45
STRUCTURED SYSTEMS	
General Ledger #	$747/$25
Accts Receivable #	$747/$25
Accts Payable #	$747/$25
Payroll #	$747/$25
Inventory Control #	$447/$25
Analyst #	$197/$20
Letteright #	$167/$20
NAD #	$ 87/$20
QSORT	$ 87/$20
GRAHAM-DORIAN ¶	
Most packages	$699/$40
MICRO-AP	
Selector III-C2 #	$269/$20
Selector IV #	$469/$35
S-Basic Compiler	$229/$25
WHITESMITHS	
"C" Compiler*	$600/$30
Pascal (incl "C")*	$750/$45
EIDOS SYSTEMS	
Kiss	$299/$25
Kbasic	$529/$50

"OTHER GOODIES"	
Tiny "C"	$ 69/$40
CBASIC (Ver 2.06)	$ 89/$15
Pascal/Z (Ver 3)	$369/$35
Pascal/MT (Ver 3)	$224/$30
Pascal/M	$149/$20
Pascal/UCSD	$299/$25
FMS-80	Call
CBS	$279/$45
T.I.M.‡	$369/$45
Vsort I	$159/$25
String/80	$ 84/$20
Whatsit?	$149/$25
Postmaster	$139/$20
Textwriter III	$111/$20
Magic Wand	$299/$45
Spell Binder	$349/$45
Electric Pencil II	less 15%
CPAids	less 12%
Vulcan D.B.M.S	$469/$30
Neveda Cobol	$89/$25
APPLE II®	
MICROSOFT	
Softcard (CP/M)	$292
PERSONAL SOFTWARE	
Visicalc®	$122
CCA Data Mgr	$ 84
Desktop/Plan	$ 84
PEACHTREE® ¶	
General Ledger‡	$224/$45
Accts Receivable‡	$224/$45
Accts Payable‡	$224/$45
Payroll‡	$224/$45
Inventory‡	$224/$45
MUSE	
Super-Text	$ 84
Other disk software	less 10%
Whatsit?	$129
Apple PIE	$ 69
TRS-80® MODEL II	
CP/M 2.2	$149
Electric Pencil II	less 15%
TRS-80® MODEL I	
CP/M 1.4	$129
CCA Data Mgr	$ 68

★—Special Bonus with order ‡—Requires microsoft BASIC ¶—Supplied in source code #—Requires CBASIC-2 ®—Mfgs. Trademark

Don't see it—CALL! Other software requirements—Call

"LIGHTNIN" service available! Just call and ask Diana.

ORDERS ONLY—CALL TOLL FREE VISA • MASTERCHARGE

1-800-854-2003 ext. **823** • **Calif. 1-800-522-1500** ext. **823**

Overseas—add $10 plus additional postage • Add $2.50 postage and handling per each item • California residents add 6% sales tax • Allow 2 weeks on checks, C.O.D. ok • Prices subject to change without notice All items subject to availability •

For information write or call: **THE DISCOUNT SOFTWARE GROUP**

1610 Argyle Ave., Bldg. 102 • Los Angeles, CA 90028 • (213) 665-8280

Circle 199 on inquiry card.

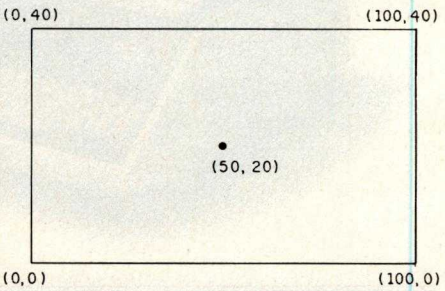


Figure 1: *The TRS-80 video monitor screen is partitioned into one hundred units horizontally and forty units vertically. The bottom left corner of the screen corresponds to the coordinates (0,0). Coordinates are also used to specify* viewports *in which the plot is to be displayed.*

Month	Cost($)
1	80
2	90
3	75
4	50
5	45
6	45
7	50
8	80
9	70
10	65
11	70
12	80

Table 1: *This hypothetical set of data represents the heating costs incurred in a house. Plotted as in figure 2, the information may be limited to one area of the screen or may use the whole screen, as in figure 3.*

Circle 200 on inquiry card.

Dealers: We can supply you with the industry's largest selection of quality business systems in our . . .

$245 Dealer Demo System.

You've got the hardware . . . we've got the software AND the total sales package to sell this rapid-growth market. Demonstration diskettes and documentation to quickly close the sale. (Kit includes: 14 diskettes, 20 users manuals and supporting Promotional Material.)

Check our complete list of systems. The source code is dealer-adaptable to run on any computer with disc capabilities in CBASIC II (CP/M).

GL, A/P, A/R
Payroll
Cash Receipts/Disb.
Job Costing
Fund Accounting
Student Scheduling
Mailing List Mgmt.
Medical/Dental
Office Scheduler
Patient Billing & A/R
Insurance Forms

Wholesale Distribution System
Purchasing & Receiving
Inventory Control
Invoicing & Receivables
Salesman Comm. Reporting
Backorder Management
Manufacturing Inventory Control
Finished Goods Inventory Mgmt.
Parts Inventory Mgmt.
Parts Purchasing & Receiving
Bill of Material
Production Scheduling



THE STANDARD OF EXCELLENCE IN BUSINESS SYSTEMS SOFTWARE

INTERNATIONAL MICRO SYSTEMS

For details on our demo special, contact us at:
8425 Quivira Road, Lenexa, Kansas 66215
Phone: (913) 888-8330

FORTH for CP/M*

An enhanced version of FIG** FORTH is now available on a CP/M* disk, ready to run. Features include:

- **EDITOR, WITH STRING COMMANDS**
- **Z-80/8080 ASSEMBLER**
- **RAPID DISK I/O VIA INTERLEAVING**
- **8 DISK BUFFERS, 1024 bytes each**

The price of $75 includes documentation suitable for the beginning FORTH programmer, as well as the experienced user.

Available for immediate delivery.
Send $75 (includes shipping — CA residents add 6% sales tax) & your address to:

Mitchell E. Timin Engineering Co.
9575 Genesee Ave.
San Diego, CA 92121


*TM Digital Research
**FORTH INTEREST GROUP

Desk Main/Frame

Desk Main/Frame

LOW COST & ATTRACTIVE STYLING

- MAIN/FRAME INTEGRATED INTO FURNITURE QUALITY DESK
- ELECTRONICS PACKAGE SLIDE MOUNTED FOR EASY ACCESS
- SUPPORTS TWO 8" FLOPPY DRIVES FROM SEVERAL MANUFACTURERS (DRIVES NOT INCLUDED)
- 10 SLOT MOTHERBOARD INCLUDES CONNECTORS
- POWER SUPPLY FOR DRIVES AND CARDS
- DESK AND MAIN/FRAME AVAILABLE SEPARATELY
- MATCHING PRINTER DESK AVAILABLE

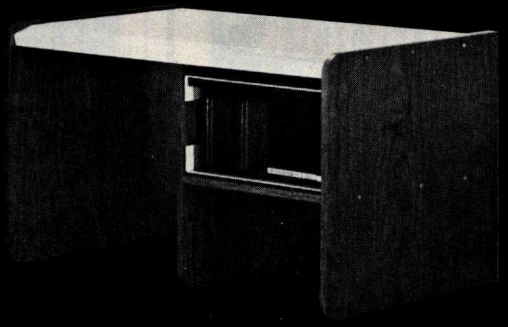

WRITE OR CALL FOR OUR BROCHURE WHICH INCLUDES OUR APPLICATION NOTE: 'BUILDING CHEAP COMPUTERS'

INTEGRAND

8474 Ave. 296 • Visalia, CA 93277 • (209) 733-9288
We accept BankAmericard/Visa and MasterCharge

Circle 201 on inquiry card.

Circle 202 on inquiry card.


Circle 203 on inquiry card.

"A triumph of cleverness."
—*Parabola*

"Every few decades an unknown author brings out a book of such depth, clarity, range, wit, beauty and originality that it is recognized at once as a major literary event. This is such a work." —MARTIN GARDNER, *Scientific American*


$8.95, now in paperback, at your bookstore

VINTAGE BOOKS
A division of Random House

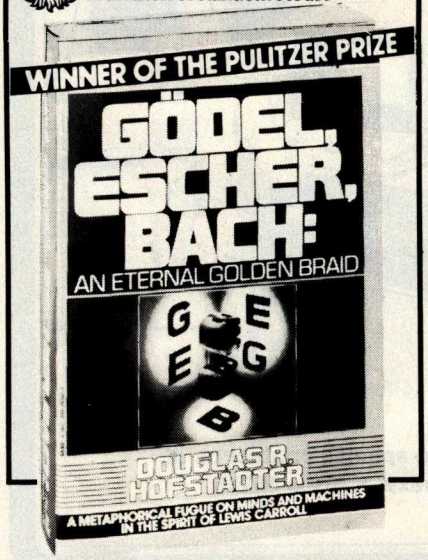

"A rarity—a first-rate popular book about modern mathematics."

—JEREMY BERNSTEIN, *The New Yorker*

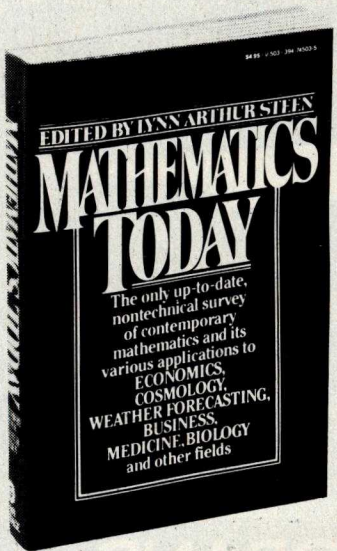

$4.95, now in paperback, at your bookstore

VINTAGE BOOKS
A division of Random House

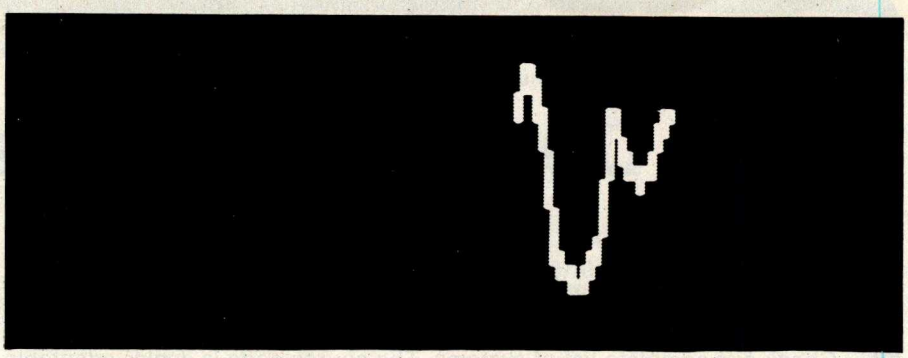


Figure 2: *The information of table 1 is plotted as shown here. The size and location of the* viewport *used were specified by limiting the display area to the bounds of 50 to 100 and 20 to 40.*

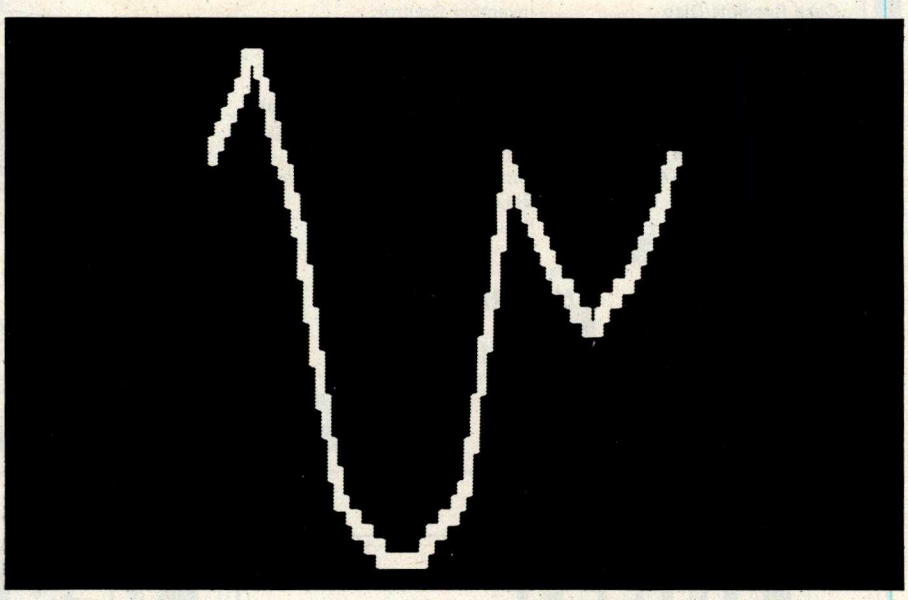


Figure 3: *The information of table 1 is plotted again, with the* viewport *bounds set at 0 to 100 and 0 to 40 (whole screen).*

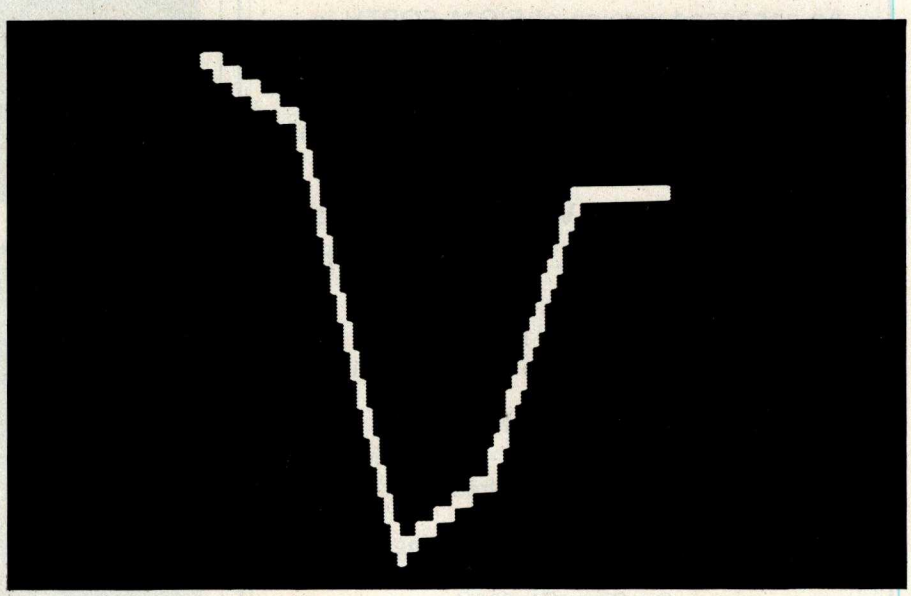


Figure 4: *The information, as in table 1, may be condensed by changing the IN variable. The integer value specified allows the program to plot a reduced number of values from the array. Also, varying the S1 parameter may help to close gaps that occur between plotting points.*

Circle 204 on inquiry card.

New Produced and widely used in England and U.S.A.
COMPLETE BUSINESS PACKAGE

INCLUDES EVERYTHING FROM INVENTORY TO SALES SUMMARY
PROMPTS USER, VALIDATES EACH ENTRY, MENU DRIVEN

Approximately 60-100 entries/Inputs require only 2-4 hours weekly and your entire business is under control.

PROGRAMS ARE INTEGRATED-

01 = ENTER NAMES/ADDRESS, ETC
02 = ENTER/PRINT INVOICES
03 = ENTER PURCHASES
04 = ENTER A/C RECEIVABLES
05 = ENTER A/C PAYABLES
06 = ENTER/UPDATE INVENTORY
07 = ENTER/UPDATE ORDERS
08 = ENTER/UPDATE BANKS
09 = EXAMINE/MONITOR SALES LEDGER
10 = EXAMINE/MONITOR PURCHASE LEDGER
11 = EXAMINE/MONITOR (INCOMPLETE RECORDS)
12 = EXAMINE PRODUCT SALES

SELECT FUNCTION BY NUMBER-

13 = PRINT CUSTOMER STATEMENTS
14 = PRINT SUPPLIER STATEMENTS
15 = PRINT AGENT STATEMENTS
16 = PRINT TAX STATEMENTS
17 = PRINT WEEK/MONTH SALES
18 = PRINT WEEK/MONTH PURCHASES
19 = PRINT YEAR AUDIT
20 = PRINT PROFIT/LOSS ACCOUNT
21 = UPDATE END MONTH FILES MAINTENANCE
22 = PRINT CASH FLOW FORECAST
23 = ENTER/UPDATE PAYROLL (NOT YET AVAILABLE)
24 = RETURN TO BASIC

WHICH ONE? (ENTER 1-24)
01 SUB. MENU EXAMPLE: 01 = EXAMINE: 02 = INSERT: 03 = AMEND: 04 = DELETE
05 = PRINT (1,2,3): 06 = NUMERIC COMBINATIONS: 07 = SORT
VERY FLEXIBLE. ADD YOUR OWN FUNCTIONS. EASY TO INTEGRATE.
All programs in BASIC for CP/M. PET. 6800

G. W. COMPUTERS LTD, the producers of this beautiful package in U.K.

WE EXPORT TO ALL COUNTRIES:
BARCLAYCARD ACCEPTED
CBM APPROVED

CP/M Ver. 9.00 is one 16 K core program using random access releasing both drives for data storage, and 250 word vocabulary is translatable in any foreign language.

CALLERS BY APPOINTMENT ONLY
89 Bedford Court Mansions
Bedford Avenue
London WC1, U.K.

CONTACT TONY WINTER 01-636-8210
BARCLAYCARD ACCEPTED
CBM APPROVED

CP/M Ver. 9.00 is one 16 K core program using random access releasing both drives for data storage, and 250 word vocabulary is translatable in any foreign language.

PRICES: Programs 1-23 EXC (19,20,22,23) £475

£575 Stock Integrated Option + £100 Bank Integrated Option + £100

AT LAST!

Mass production prices on this high quality software. Buy direct and save 50%. Now, also available for CBASIC on CP M and MBASIC on HEATH HDOS.

DATA BASE MANAGER Mod-I $69 Mod-II $199
You can use it to maintain a data base & produce reports without any user programming. Define file parameters & report formats on-line. Key random access, fast multi-key sort, field arith., label, audit log. No time-consuming overlays. 500 happy users in a year. Mod-II version has over 50 enhancements including 40 fields max. 'IDM-M2 is great!' - 80-US.

A/R Mod-I $69 Mod-II $149
Invoices, statements, aging, sales analysis, credit checking, form input, order entry. As opposed to most other A/R, ours can be used by doctors, store managers, etc.

WORD PROCESSOR Mod-I $49 Mod-II $49
Center, justification, indentation, page numbering. Mod-I version features upper/lower case without hardware change!

MAILING LIST Mod-I $59 Mod-II $99
The best! Compare and be selective. Form input, 5-digit selection code, zip code ext., sort any field, multiple labels. Who else offers a report writer?

INVENTORY Mod-I $99 Mod-II $149
Fast, key random access. Reports include order info, performance summary, E.O.Q., and user-specified reports. Many have converted their inventory system to ours!

GL, A/R, A/P, & PAYROLL Mod-II $129 each
Integrated accounting package. ISAM, 100+ page manual, Uses 80 column screen, not 64. A $1,000 value. Dual disk required.

L216, a cassette package of 10 business programs for Level II 16K systems, $59. Includes word processor & data base. Poker game $19.

Most programs are on-line, interactive, random access, bug free, documented and delivered on disks. Mod-I programs require 32K TRSDOS. Don't let our low prices fool you! If still not convinced, send SASE (28¢) for catalog.

MICRO ARCHITECT, INC.,
96 Dothan St., Arlington, MA 02174

Circle 205 on inquiry card.

TEXAS COMPUTER SYSTEMS
a **Radio Shack**
Authorized Sales Center, OFFERS
LOWEST PRICES on

TRS-80®
COMPUTERS

For the **BEST** prices on ALL **TRS-80®** computers, **CALL** our **TOLL FREE NUMBER 1-800-351-1473. All** Radio Shack® computers are discounted **10%, 15% up to 20%! CALL** for the latest prices on the items you need, or get advice from our consultant about your specific needs. **CALL** for prices on the Model I, II, and the new Model III, Color Computer and Pocket Computer.

SAVE up to **50%** on accessories (non-Radio Shack®). Need more disk space? Ask about single/**DOUBLE DENSITY** controller for the Model I. 300k in a 2-disk system. 5 minute installation w/no modifications. Copies your single density data to **DOUBLE** for complete compatability. Less than $200.

40 track disk drives $359. 16k memory add on only $58 w/instructions. Specify computer or expansion interface. CALL for information on Programs available.

★ UPS prepaid insured delivery—**FREE** except some large items.
★ No taxes on out-of-state shipments. Texas res. Add 5%.
★ All merchandise is new, checked and guaranteed by manufacturer.
★ Payment: Money Order, Cashier's Check, Certified Check. Personal Checks require 3 weeks to clear. VISA, MASTERCHARGE—Add 3%.
★ Prices subject to change at any time.
★ Delivery of merchandise is subject to availability.

TCS, 106 East 10th, Brady, TX. 76825
An Authorized **RADIO SHACK®** Sales Center F701


TOLL FREE Order Number 1-800-351-1473
Texas Residents 915-597-0673

Circle 206 on inquiry card.

Circle 207 on inquiry card.

CHOOSE...

Choose an Apple Desk



A compact bi-level desk ideal for an Apple computer system. This 42" x 31½" desk comes with a shelf to hold two Apple disk drives. The top shelf for your TV or monitor and manuals can also have an optional paper slot to accomodate a printer.

Choose a Micro Desk




Get your micro computer off the desk top and into the micro shelf under our Designer Series desks. Suitable for the North Star, Dynabyte, Vector Graphics, and Altos computers. The desks come in a variety of sizes and colors.

Choose a Mini Rack



Mini racks and mini micro racks have standard venting, cable cut outs and adjustable RETMA rails. Choose a stand alone bay or a 48", 60", or 72" desk model in a variety of colors and wood tones. A custom rack is available for the Cromemco.

Choose a Printer Stand



The Universal printer stand fits the:

Centronics 700's	Diablo 1600's & 2300's
Dec LA 34	T.I. 810 & 820
NEC Spinwriter	Okidata Slimline
Lear Siegler 300's	Anadex 9500's

Delivery in days on over 200 styles and colors in stock. Dealer inquiries invited.

ELECTRONIC SYSTEMS FURNITURE COMPANY

17129 S. Kingsview Avenue
Carson, California 90746
Telephone: (213)538-9601

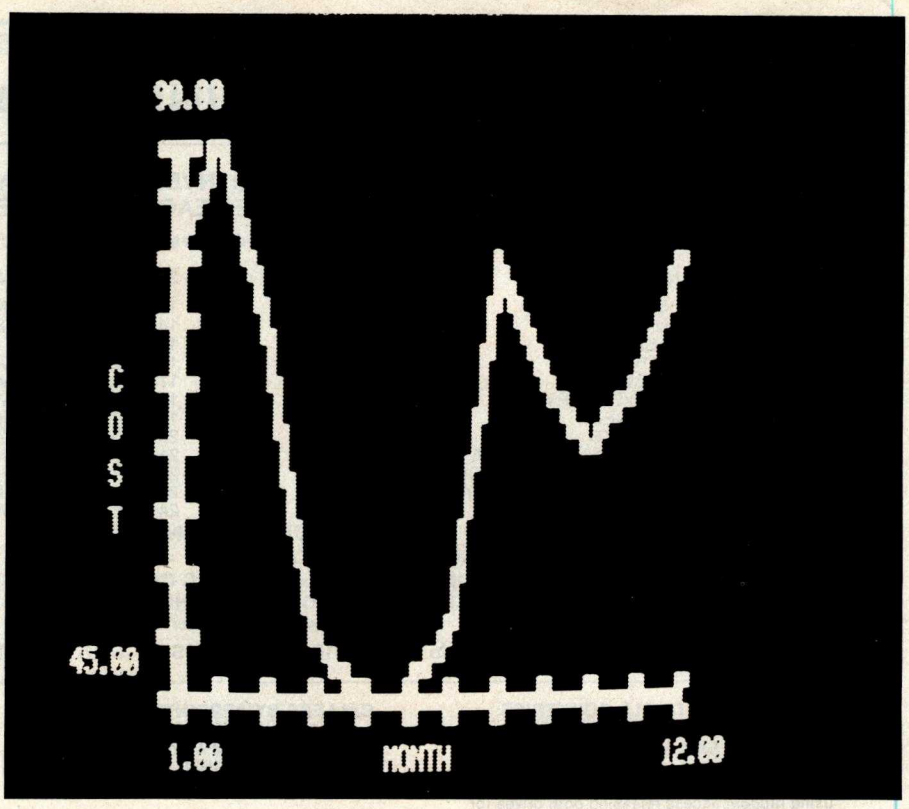


Figure 5: *The axis-plotting subroutine provides for labeling and scaling of the display. The user only needs to specify increments for each scale.*


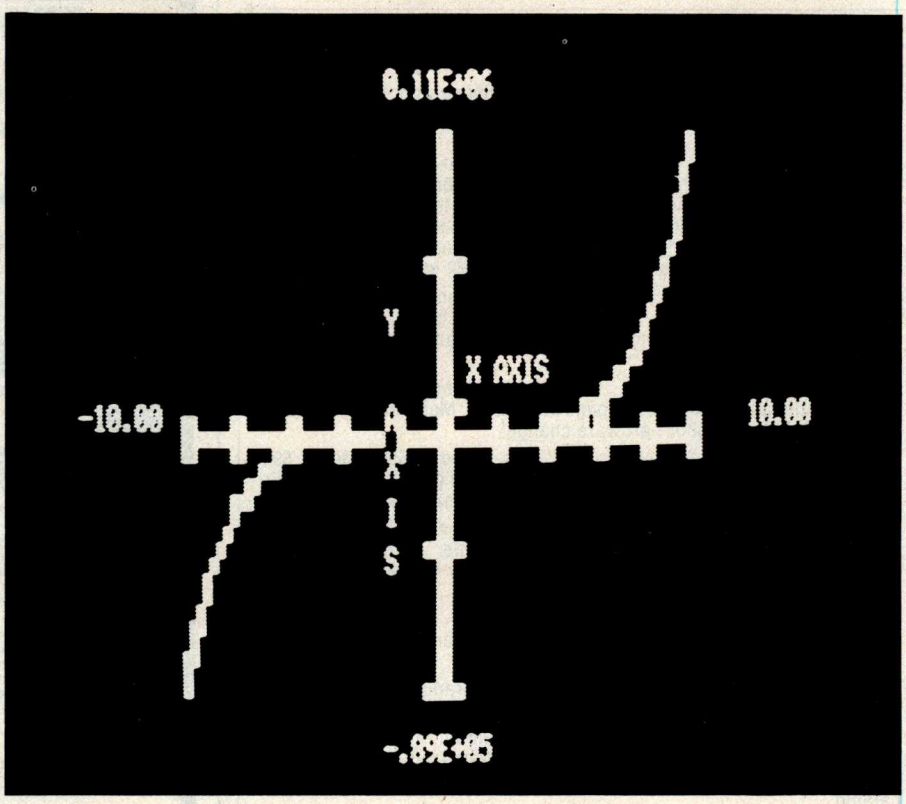


Figure 6: *Analytic functions such as this may be plotted by transforming the function into an array. Usually, a short BASIC routine may be inserted before the plotting routines, depending on the complexity of the desired display.*

Circle 208 on inquiry card.

THE FIRST TRS-80® COMPATIBLE COMPUTER WITH HIGH DENSITY COLOR GRAPHICS!

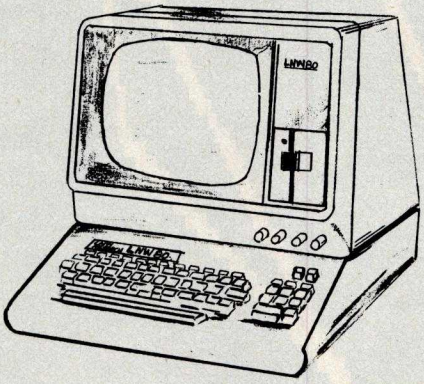

LNW RESEARCH introduces the LNW80, a high performance color computer, compatible with the TRS-80™ Model I. The fully integrated LNW80 is a sophisticated and versatile microcomputer with the following powerful features.

COMPATIBILITY

Hardware and software compatible to the Radio Shack TRS-80™ Model I computer, provides the widest software base of any microcomputer. cassette interface; expansion bus

DISPLAY

Quality upper and lower case display.

Two modes of color graphics, high resolution graphics, 384 x 192 in eight colors - higher density than the Apple II*. Low density color graphics of 128 x 192 are also available in eight colors.

High resolution - black and white graphics - of 384 x 192 mixed with text and TRS-80™ standard graphics.

Reverse video, composite video, RF output.

PERFORMANCE

The LNW80 utilizes the fast Z-80A microprocessor which executes at a speed of 4 MHZ - over twice the speed of the TRS-80™ Model I.

LNW80

PC BOARD $89.95

Ask about our : Keyboard
cabinet
Leedex
VIDEO 100-80

NEW **EXTERNAL DATA SEPARATOR**
ASSEMBLED AND FULLY TESTED
$14.95
SOME SOLDERING REQUIRED

SYSTEM EXPANSION

AT $69.95 [PC BOARD & USER MANUAL]

- SERIAL RS232C/20mA I/O
- FLOPPY CONTROLLER
- 32K BYTES MEMORY
- PARALLEL PRINTER PORT
- DUAL CASSETTE PORT
- REAL-TIME CLOCK
- SCREEN PRINTER BUS
- ONBOARD POWER SUPPLY
- SOFTWARE COMPATIBLE
- SOLDER MASK, SILK SCREEN

LNW RESEARCH

LNW RESEARCH 3183-E AIRWAY AVE COSTA MESA CA 92626 714-552-8946

ORDERING INFORMATION

Add $3 for postage and handling.
CA residents add 6% sales tax

VISA master charge

*Apple II is a TM of Apple Computer, Inc.
TRS-80 is a TM of Tandy Corp.

FOR SERIOUS USERS
OF 8080, 8085, OR Z80 COMPUTERS

PRINTER WIZARD — Now add powerful capabilities to your printer. Free your computer for use while simultaneously printing backlogged output on a first-in-first-out basis. Transparent operation without noticable slowing of the computer. Allows continuous computer and printer operation on programs having sporadic output. Will backlog up to 100 pages when used with a disk system. Adds optional automatic paging with numbers, adjustable margins on 4 sides, indented overflow lines. Occupies less than 2½ K.

	EX80M103	$45.00
Documentation only	EX80M103D	$ 7.50

DISASSEMBLER — Disassemble machine code into standard source language. Modify or relocate existing programs such as DOS or BASIC using your existing assembler (not included). Disassembles any 8080, 8085, or Z80 code, including embedded data blocks and "trick" codes. Generates symbol and label tables.

	EX80M217	$75.00
Documentation only	EX80M217D	$12.50

ALL EXCOM products are fully supported and warranted indefinitely against original defects. Available on single or double density NORTHSTAR 5¼" diskettes, 300 or 1200 baud cassettes (specify). Washington residents add 5.3% tax.


EXCOM

P.O. Box 1802 Bellevue, Washington 98009 U.S.A.
Telephone (206) 641-6577

LEAPAC SERVICES

MAURO PROAC MP-250 PLOTTER - $695
with L2D Plot package - $795
with L2D & L3P packages - $950

LEAPAC SERVICES

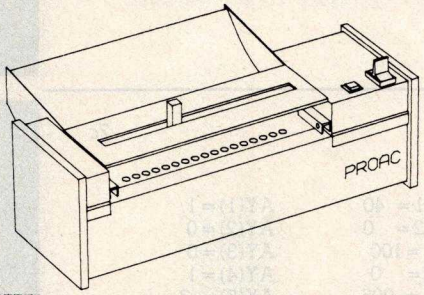

MAURO PLOTTER - Uses 11" by 8-1/2" or any length paper. Resolution is 200 steps per inch. 0.005" tracking error. Mauro X-Y vector software with pen control is avalable for 8080/Z80, 6502, & 6800 micro-processors. Requires 5 bits of a parallel output port. APPLE, TRS-80, and RS232 Interfaces are avalable as I/O Options.

LEAPAC SOFTWARE - Supports complete 2D & perspective plotting, including ASCII and curve generation. Available as relative linking libraries (L80) for MICROSOFT compatible software products, FORTRAN-80, COBOL-80, COMPILER BASIC, and MACRO-80 in CP/M compatible files on 8" IBM-3740 disks or 5-1/4" NORTHSTAR formatted disks.

L2D - X-Y plot package. Contains over 20 entries, including CALCOMP compatible calls such as PLOT and WHERE.

L3P - Perspective plot package. Contains over 70 entries. Capable of ZOOMING, FLY-BYS, ANIMATION and much more. (See self portrait above).


LEAPAC SERVICES (916) 381-1717
8245 MEDITERRANEAN WAY SACRAMENTO CA 95826
DEALER INQUIRIES ARE INVITED

CP/M is a registered trade mark of Digital Research, Inc.
MICROSOFT is a trade mark of MICROSOFT, Inc.CA
CALCOMP is a trade mark of California Computer Products, Inc.

Circle 210 on inquiry card.


7a

```
W1 = 40          AY(1) = 0
W2 =  0          AY(2) = 1
Z1 = 100         AY(3) = 2
Z2 =  0          AY(4) = 2
S1 = .005        AY(5) = 0
                 AY(6) = 0
AX(1) = 1        AY(7) = 2
AX(2) = 2
AX(3) = 2.1      TI = 1
AX(4) = 1        TA = 7
AX(5) = 0        IN = 1
AX(6) = 1
AX(7) = 2.1      GOSUB 10000
```

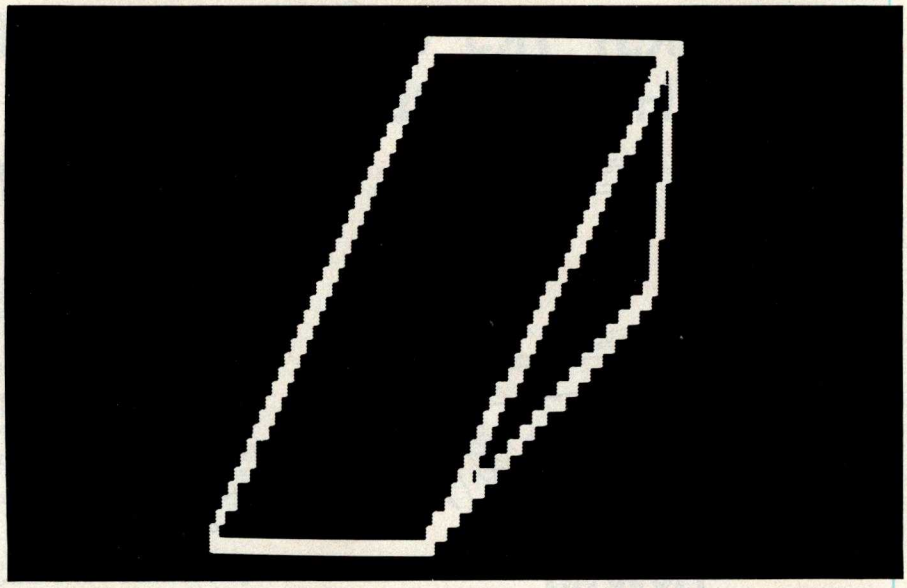

7b

```
W1 = 40          AY(1) = 0
W2 =  0          AY(2) = 0
Z1 = 100         AY(3) = 1
Z2 =  0          AY(4) = 2
S1 = .005        AY(5) = 2
                 AY(6) = 1
AX(1) = 0        AY(7) = 0
AX(2) = 1        AY(8) = 1
AX(3) = 2        AY(9) = 1
AX(4) = 2.3      AY(10) = 0
AX(5) = 1.3      AY(11) = 1
AX(6) = 0.3      AY(12) = 2
AX(7) = 0
AX(8) = 0.3      TI = 1
AX(9) = 1.3      TA = 12
AX(10) = 1       IN = 1
AX(11) = 1.3
AX(12) = 2.3     GOSUB 10000
```

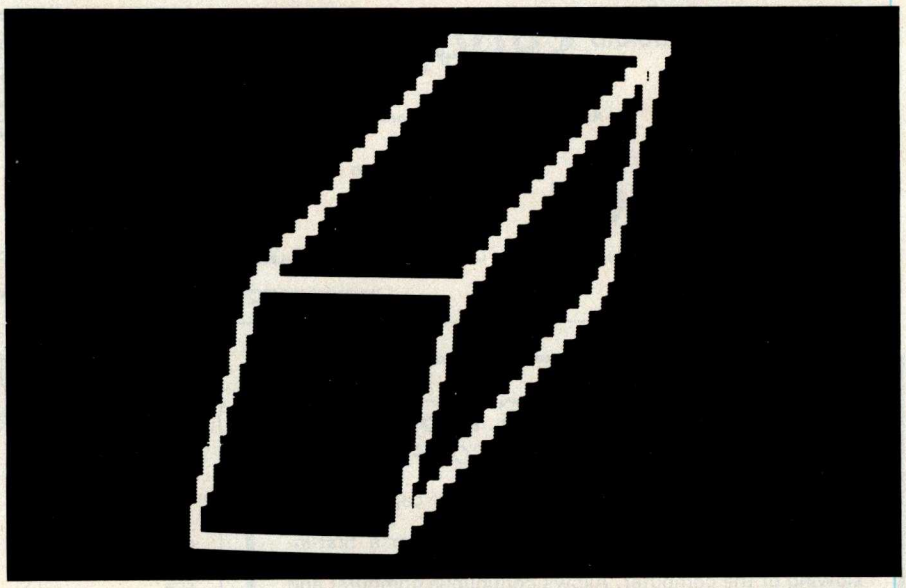

7c

```
W1 = 40          AY(1) = 1
W2 =  0          AY(2) = 0
Z1 = 100         AY(3) = 0
Z2 =  0          AY(4) = 1
S1 = .005        AY(5) = .3
                 AY(6) = 0
AX(1) = .5       AY(7) = 0
AX(2) = 0        AY(8) = .4
AX(3) = 1        AY(9) = .4
AX(4) = .5       AY(10) = .58
AX(5) = 1.3      AY(11) = .91
AX(6) = 1
AX(7) = 0        TI = 1
AX(8) = .2       TA = 11
AX(9) = .8       IN = 1
AX(10) = .98
AX(11) = .6      GOSUB 10000
```


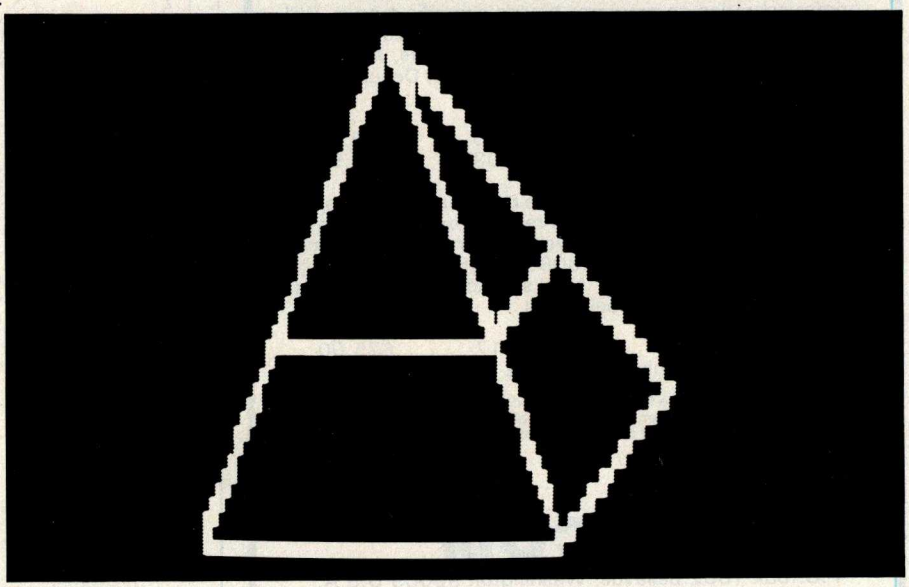


Figure 7: *Three-dimensional displays are also achieved through the transformation to an array.*

Circle 211 on inquiry card.

PET TWO-WAY RS-232 and PARALLEL OUTPUT INTERFACE



SADI - The microprocessor based serial and parallel interface for the Commodore PET. SADI allows you to connect your PET to parallel and serial printers, CRT's, modems, acoustic couplers, hard copy terminals and other computers. The serial and parallel ports are independent allowing the PET to communicate with both peripheral devices simultaneously or one at a time. In addition, the RS-232 device can communicate with the parallel device.

Special Features for the PET interface include:
- Conversion to true ASCII both in and out
- Cursor controls and function characters specially printed
- Selectable reversal of upper and lower case
- PET IEEE connector for daisy chaining
- Addressable - works with other devices

Special Features for the serial interface include:
- Baud rate selectable from 75 to 9600
- Half or full duplex
- 32 character buffer
- X-ON, X-OFF automatically sent
- Selectable carriage return delay

Special Features for the parallel interface include:
- Data strobe - either polarity
- Device ready - either polarity
- Centronics compatible

Complete with power supply, PET IEEE cable, RS-232 connector, parallel port connector and case. Assembled and tested.
- SADIa (110VAC) $295
- SADIe (230VAC) $325

Order direct or contact your local computer store.

CmC
Connecticut microComputer, Inc.

34 DEL MAR DRIVE, BROOKFIELD, CONNECTICUT 06804
TEL: (203) 775-4595 TWX: 710-456-0052

VISA AND M/C ACCEPTED - SEND ACCOUNT NUMBER, EXPIRATION DATE AND SIGN ORDER. ADD $3 PER ORDER FOR SHIPPING & HANDLING - FOREIGN ORDERS ADD 10% FOR AIR POSTAGE. MENTION THIS MAGAZINE WITH YOUR ORDER AND DEDUCT 2%.

Circle 212 on inquiry card.

PET to NEC and CENTRONICS PRINTER ADAPTER

LOWEST COST COMPLETE INTERFACE ON THE MARKET

Simple to use - low cost - designed for NEC 5530 Spinwriter and Centronics parallel printers. Works with WORDPRO and other software. Switch for upper-lower case conversion or upper case only.

Plugs into the PET and into the printer - all cables and connectors included - extra IEEE connector for Commodore disk drives.

Uses BASIC PRINT statements - no machine code needed.

Device address selectable - works with other peripherals.

$129 complete - compare to others at $225. Generous dealer discounts.

Assembled and tested. Our usual 30 day money back trial period applies.

Order direct or contact your local computer store.

CmC
Connecticut microComputer, Inc.

34 DEL MAR DRIVE, BROOKFIELD, CONNECTICUT 06804
TEL: (203) 775-4595 TWX: 710-456-0052

VISA AND M/C ACCEPTED - SEND ACCOUNT NUMBER, EXPIRATION DATE AND SIGN ORDER. ADD $3 PER ORDER FOR SHIPPING & HANDLING - FOREIGN ORDERS ADD 10% FOR AIR POSTAGE. MENTION THIS MAGAZINE WITH YOUR ORDER AND DEDUCT 2%.

Circle 213 on inquiry card.

MICAH

OSBORNE COMPATABLE READY to RUN BUSINESS SOFTWARE

in CBASIC2 or 16K BASIC

★ *features* ★

- Four Complete Packages---
  - General Ledger
  - Accounts Receivable
  - Accounts Payable
  - Payroll with Cost Accounting
- Strong support from Osborne Manuals
- CBASIC2 runs under CP/M or under CDOS version 1.07 on Cromemco computers
- 16K BASIC runs on Cromemco computers
- Cursor addressing routines for Hazeltine, Lear Siegler and Cromemco (Beehive) Terminals
- Source Codes and Installation Instructions provided along with disks
- Automatic Command Start-up
- Easy to apply to all of your business and systems needs

★ *hardware required* ★

- One or more 8" or 5" Floppy ☆ Drives
- CRT with cursor addressing
- 132-Column Printer

$145.00 per package

TO ORDER
Add $5 for shipping
Calif add 6-1/2% Sales Tax
CREDIT CARDS ACCEPTED

Osborne Manuals $25 each

• DEALER INQUIRIES INVITED •

- OSBORNE READY to RUN BUSINESS SOFTWARE
- SBIOS(CP/M for Cromemco computers)
- X-IOS(MP/M for Cromemco Computers)
- EXPAND(Run Cromemco Software on CP/M)
- MICROPLOT(Versatile Printer Graphics)
- DRIVE(Customized Printer Drivers)
- DUP 3(Disk Utilities for Cromemco
- DUP 4(Double sided
- DUP 5(Disk Utilities for CP/M
- DUP 6(Dbl. Density

• Call or Write for Free Catalogue and More Information •

★ **We will Customize any of our programs at our Standard Consulting Rates** ★

☆ All orders usually shipped 8"
For 5" disks add $20.00 for downloading

MICAH BOX 4987 WALNUT CREEK, CALIF. 94596 ph. 415/933-2783
MICro Applications and Hardware
• CONSULTANTS and SOFTWARE DEVELOPERS •

Circle 214 on inquiry card.

TRS 80-I TRS 80-II

TRSDOS® TRSDOS®
NEWDOS® P & T CP/M®

EDITOR

EDIT ANY ASCII FILE/PROGRAM
GLOBAL SEARCH/REPLACE

ABSOLUTELY THE BEST

79.95 99.95

ALSO AVAILABLE

Osborne Accounting Model I & Model II CP/M Host program for Model II CP/M®

VISA or Money Order

VISA

BYTES & FLIGHTS
7631 - St. Albans Rd.
Richmond, B.C.
V6Y 2K8
(604) 278-5200

Circle 215 on inquiry card.

Looking for the
Lowest Prices

on



TRS-80®
MICROCOMPUTERS

We have consistently offered the TRS-80 line at savings **up to 20%,** which means you can save $150 to $1500 by buying directly from Computer Discount of America.

TRS-80 Model II, 64K System, with disc drive — only $3385.00

Other TRS-80 Model I, Model II, or Model III computers and systems, are in stock at similar savings.

TRS-80®
ACCESSORIES

Our savings are as big on stands. expansion interfaces, printers, diskettes — everything for your TRS-80 System. We also stock the new TRS-80 Color Computer, and Pocket Computer.

ATARI®
400 - $499.00
800 - $799.00



The computers, accessories, and hardware are brand new, in factory sealed cartons, and carry a full factory warranty.

Most models are in stock for immediate delivery (usually within 7-10 days), and a price quote is as near as your phone.

So if you're looking for the **lowest prices in the U.S.A.,** for microcomputers and accessories, call Computer Discount of America, West Milford, New Jersey, 07480. 201-728-8080. **NO TAX ON OUT-OF-STATE SHIPMENTS.**

TOLL FREE 800-526-5313

Computer Discount of America

Listing 2: *The axis-creating subroutine shown here produces properly scaled axes, complete with tic marks and labels, from a set of values specified by inserting BASIC statements.*

```
20000 IF X1<=0 AND X2<=0 THEN A1=Z1 ELSE A1=Z2
20005 IF X1>=0 AND X2<=0 THEN A1=Z2-X2/A
20010 FOR I1=0 TO 1
20015 FOR J1=W2 TO W1
20020 SET ((A1+I1),(47-J1))
20025 NEXT J1
20030 NEXT I1
20035 IF Y1<=0 AND Y2<=0 THEN B1=47-W1 ELSE B1=47-W2
20040 IF Y1>=0 AND Y2<=0 THEN B1=47-W2+Y2/B
20045 FOR I3=Z2 TO Z1
20050 SET(I3,B1)
20055 NEXT I3
20060 FOR I5=1 TO 3 STEP 2
20065 FOR J5=0 TO 1
20070 FOR K5=X2 TO X1 STEP C1
20075 SET(((K5-X2)/A+Z2+J5),(B1-I5+2))
20080 NEXT K5
20085 NEXT J5
20090 NEXT I5
20095 FOR I6=0 TO 4 STEP 2
20100 FOR J6=2 TO 3
20105 FOR K6=Y2 TO Y1 STEP C2
20110 SET((A1+J6-I6),(47-((K6-Y2)/B+W2)))
20115 NEXT K6
20120 NEXT J6
20125 NEXT I6
20130 IF B1<>47-W2 GOTO 20145
20135 IF A1=Z2-X2/A THEN P1=-64 ELSE P1=64
20140 IF A1=Z2 THEN P2=-4 ELSE P2=4
20145 IF B1<>47-W1 GOTO 20160
20150 IF A1=Z2-X2/A THEN F1=64 ELSE P1=-64
20155 IF A1=Z2 THEN P2=-4 ELSE P2=4
20160 IF B1<>47-W2+Y2/B GOTO 20175
20165 P1=-64
20170 IF A1=Z2 THEN P2=4 ELSE P2=-4
20175 Z3=LEN(AX$)
20180 Z4=(Z1+Z2)/2
20185 I7=0
20190 FOR J7=3 TO 45 STEP 3
20195 IF B1<J7 GOTO 20210
20200 I7=I7+64
20205 NEXT J7
20210 Z5=Z4/2 +I7-Z3/2
20215 IF A1=Z2-X2/A AND B1=47-W2+Y2/B THEN DU=5 ELSE DU=0
20220 PRINT @ Z5+P1+DU, AX$,
20225 W3=LEN(AY$)
20230 FOR I8=1 TO W3
20235 F$(I8)=MID$(AY$,I8,1)
20240 NEXT I8
20245 W4=(W1+W2)/2
20250 J6=0
20255 FOR K8=3 TO 45 STEP 3
20260 IF 47-W4<K8 GOTO 20275
20265 J8=J8+64
20270 NEXT K8
20275 W5=J8+A1/2-(INT(W3/2)-1)*64
20280 L8=0
20285 FOR M8=W5 TO (W5+(W3-1)*64) STEP 64
20290 L8=L6+1
20295 PRINT @ M6+P2,F$(L8);
20300 NEXT M8
20305 F1(1)=47-W1
20310 F1(2)=47-W2
20315 F1(3)=B1
20320 F1(4)=B1
20325 F3(1)=A1/2
20330 F3(2)=A1/2
20335 F3(3)=Z1/2
20340 F3(4)=Z2/2
20345 FOR I9=1 TO 4
20350 J9=0
20355 FOR K9=3 TO 45 STEP 3
20360 IF F1(I9)<K9 GOTO 20375
```

Listing 2 continued on page 310

Circle 216 on inquiry card.

RACET COMPUTES
702 Palmdale, Orange CA 92665

— RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET

FROM THE LEADER IN UTILITY SOFTWARE
FOR THE TRS* COMPUTERS

★★ NEW ★★ **HARD/SOFT DISK SYSTEM** (MOD II) **$400**

The Hard Disk Software Implementation You Have Been Waiting For!! MOD II TRSDOS compatible — using Cameo controller interface to popular large hard disk fixed/removable combinations (Ampex, CDC, Diablo, Pertec, Wanco, etc.). Compatible with your existing programs — change only 'filename'. All disk BASIC statements identical. Improved dynamic file allocation. A single file can be as large as one disk — 20 megabytes or larger. Alternate mode allows 24-million byte record range. Directory expandable to handle thousands of files! Includes special XCOPY, DCS, and SZAP utilities for use with hard or soft disks. Parameterized FORMAT utility includes options for specifying the number of sectors/track, platters/drive, sectors/granule, sectors/directory, etc.

★★ NEW ★★ **BASIC LINK FACILITY 'BLINK'** **$25 Mod I**
(Mod I Min 32K 1-disk) **$50 Mod II**

Link from one BASIC program to another saving all variables! The new program can be smaller or larger than the original program in memory. The chained program may either replace the original program, or can be **merged** by statement number. The statement number where the chained program execution is to begin may be specified!

INFINITE BASIC (Mod I Tape or Disk) **$49.95**

Extends Level II BASIC with complete MATRIX functions and 50 more string functions. Includes RACET machine language sorts! Sort 1000 elements in 9 seconds!! Select only functions you want to optimize memory usage.

INFINITE BUSINESS (Requires Infinite BASIC) **$29.95**

Complete printer pagination controls — auto headers, footers, page numbers. Packed decimal arithmetic — 127 digit accuracy +, −, *, /. Binary search of sorted and unsorted arrays. Hash codes.

BASIC CROSS REFERENCE UTILITY (Mod II 64K) **$50.00**

SEEK and FIND functions for Variables, Line Numbers, Strings, Keywords. 'All' options available for line numbers and variables. Load from BASIC — Call with 'CTRL'R. Output to screen or printer!

DSM **$75.00 Mod I, $150.00 Mod II**
(Mod I Min 32K 2-drive system. Mod II 64K 1-drive)

Disk Sort/Merge for RANDOM files. All machine language stand-alone package for sorting speed. Establish sort specification in simple BASIC command File. Execute from DOS. Only operator action to sort is to change diskettes when requested! Handles multiple diskette files! Super fast sort times — improved disk I/O times make this the fastest Disk Sort/Merge available on Mod I or Mod II.

UTILITY PACKAGE (Mod II 64K) **$150.00**

Important enhancements to the Mod II. The file recovery capabilities alone will pay for the package in even one application! Fully documented in 124 page manual! XHIT, XGAT, XCOPY and superzap are used to reconstruct or recover data from bad diskettes! XCOPY provides multi-file copies, 'wild-card' mask select, absolute sector mode and other features. SUPERZAP allows examine/change any sector on diskette include track-0, and absolute disk backup/copy with I/O recovery. DCS builds consolidated directories from multiple diskettes into a single display or listing sorted by disk name or file name plus more. Change Disk ID with DISKID. XCREATE preallocates files and sets 'LOF' to end to speed disk accesses. DEBUGII adds single step, trace, subroutine calling, program looping, dynamic disassembly and more!!

DEVELOPMENT PACKAGE (Mod II 64K) **$125.00**

Includes RACET machine language SUPERZAP, Apparat Disassembler, and Model II interface to the Microsoft 'Editor Assembler Plus' software package including uploading services and patches for Disk I/O. Purchase price includes complete copy of Editor Assembler+ and documentation for Mod I. Assemble directly into memory, MACRO facility, save all or portions of source to disk, dynamic debug facility (ZBUG), extended editor commands.

COMPROC (Mod I — Disk only) **$19.95**

Command Processor. Auto your disk to perform any sequence of instructions that you can give from the keyboard. DIR, FREE, pause, wait for user input, BASIC, NO OF FILES and MEM SIZE, RUN program, respond to input statements, BREAK, return to DOS, etc. Includes lowercase driver, debounce, screenprint!

Circle reader request for free 24-page catalog.

DEALER INQUIRIES INVITED

CHECK, VISA, M/C, C.O.D., PURCHASE ORDER
Telephone Orders Accepted (714) 637-5016

*TRS-80 is a registered trademark of Tandy Corporation

— RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes —

THE PASCAL DATABASE written in UCSD PASCAL™

Software ahead of its time
available now for the APPLE™ COMPUTER

Create a library of information at your fingertips
Full database power. Unlimited applications for such diverse data as: mailing lists, personal and business accounting, inventory, job estimates, sales analyses and property management.

THE PASCAL DATABASE is easy to use.
Menu driven. Clear screen instructions enable even the inexperienced user to operate THE PASCAL DATABASE.

THE PASCAL DATABASE has advanced features:

- On-line interaction. Update, search and traverse database files... sort on multiple fields... maintain records in several sorted orders.
- Screen formatting ...you design the layout of your files.
- Immediate and automatic indexing of information at data entry.
- User definable data description gives you ultimate flexibility... you define file, record and field names
- Generates custom, easy to read reports. Easy storage and retrieval in report library.
- Password protection for individual files
- Up to 1024 bytes per record.

Soon available on 8" IBM 3740 floppies and other UCSD Pascal systems. Source license available. Dealer inquiries invited.

○ THE PASCAL DATABASE Special introductory price $400.00
Shipped on floppy disks. Includes complete documentation and sample datafiles.
Arizona residents please add 6% sales tax.
○ Manual only $25.00 Master Charge Bank Americard Check or Money Order
(Refundable with system purchase within 90 days)

ARIZONA COMPUTER SYSTEMS, INC.
P.O. Box 125 Jerome, Arizona 86331
(602)-634-7301 9am - 4 pm Mon.-Fri.

ACS

™ Apple is a registered trademark of Apple Computer, Inc.
™ UCSD PASCAL is a trademark of the Regents of the University of California

SPEECH RECOGNITION



NOW TALK TO YOUR:

PET, TRS-80 (LII) AIM-65 and SORCERER

NEW COGNIVOX SR-100 has 32 word (or short phrase) vocabulary (AIM-65 with 4K RAM, 16 words). Up to 98% recognition rate. Breakthrough price of only **$119** includes microphone, cassette with software and manual. Version for the TRS-80 (VIO-332) costs $149 but also has 32 word speech output and music capability, includes all above plus speaker/amplifier. For the Sorcerer, in addition to SR-100, we offer COGNIVOX VIO-132 which includes speech output and music and extensive software and costs $179. Please add $3 for shipping in the US, Calif. add 6% tax. Foreign orders welcome, add 10% for processing and shipping by air. When ordering, please specify make, model and memory size of your computer.

VOICETEK

Dept. B, P.O. Box 388, Goleta, Ca 93017

Circle 217 on inquiry card.

Circle 218 on inquiry card.

Listing 2 continued:

```
20365 J9=J9+64
20370 NEXT K9
20375 F2(I9)=J9+F3(I9)
20380 NEXT I9
20385 IF ABS(Y1)>1E4 OR ABS(Y1)<1E-2 THEN D1$="#.##[[[["
  ELSE D1$="#####.##"
20390 IF ABS(Y2)>1E4 OR ABS(Y2)<1E-2 THEN D2$="#.##[[[["
  ELSE D2$="#####.##"
20395 IF ABS(X1)>1E4 OR ABS(X1)<1E-2 THEN D3$="#.##[[[["
  ELSE D3$="#####.##"
20400 IF ABS(X2)>1E4 OR ABS(X2)<1E-2 THEN D4$="#.##[[[["
  ELSE D4$ ="#####.##"
20405 IF B1<>47-W2+Y2/B GOTO 20435
20410 D1=1
20415 D2=-9
20420 D3=-68
20425 D4=60
20430 GOTO 20505
20435 IF B1<>47-W1 GOTO 20475
20440 D1=-68
20445 D2=-68
20450 D4=60
20455 IF A1=Z1 THEN D3=65
20460 IF A1=Z2 THEN D3=54
20465 IF A1=Z2-X2/A THEN D3=-68
20470 GOTO 20505
20475 D1=60
20480 D2=60
20485 D3=-68
20490 IF A1=Z2 THEN D4=-74
20495 IF A1=Z1 THEN D4=-62
20500 IF A1=Z2-X2/A THEN D4=60
20505 PRINT @ F2(1)+D3,USING D1$;Y1;
20510 PRINT @ F2(2)+D4,USING D2$;Y2;
20515 PRINT @ F2(3)+D1,USING D3$;X1;
20520 PRINT @ F2(4)+D2,USING D4$;X2;
20525 RETURN
```


TRS-80, PET, APPLE, SORCERER

Communications Interface Systems



☐ Send & Receive Morse Code / Radioteletype
☐ Teaches Morse Code! / Copies wire services!
☐ Complete Hardware & Software Package
☐ Extensive User Manuals
☐ From $129

Write or call for complete catalog

MACROTRONICS, inc. ®
1125 N. Golden State Blvd. / Suite G
Turlock, CA 95380 (A)
(209) 667-2888 / 634-8888

VISA
master charge

California residents add 6% tax

We are experiencing telephone difficulties, please keep trying.

All scaling and other mundane functions are taken care of in the subroutine.

Text continued from page 298:

displayed as in figure 5. This is for a graph of the cost of heating for every month displayed in the total viewport.

Clearly, it is easy to plot any set of data that can be represented in array form. Remember that all scaling and other mundane functions are taken care of in the subroutines. You don't need to be concerned or irritated by the gyrations needed to create displays on the TRS-80.

Analytic Functions

In order to plot any analytic function, be prepared to transform the function into array form. An example of this is best demonstrated in the plotting of the function:

$$Y = X^5 + X^4 - X^3$$

This is for X taking on values from −10 to 10. In order for this to occur the following BASIC initialization routine is needed:

```
FOR I=-10 TO 10
AX(I+10)=I
AY(I+10)=I↑5+I↑4-I↑3
NEXT I
TI=0
TA=20
IN=1
AX$="X AXIS"
AY$="Y AXIS"
C1=    2
C2=49750
```

The result should appear as shown in figure 6. Note that the correct quadrants are displayed.

Another feature provided by this graphics package is the ability to create *three-dimensional* graphs. Figures 7a, b, and c give several examples of this, along with the array values used. The displayed figures are not necessarily functions, but may have more than one y value for each value of x.

So, creating graphic displays isn't as time-consuming as you might have once believed, and now there's less distance between the creative idea and its final realization on screen. ■

Circle 219 on inquiry card.

Circle 220 on inquiry card.

ZENITH BUSINESS SOFTWARE FOR THE Z-89!

S & M Systems, Inc., the "All-In-One" Software Company is offering a full line of Business Packages for the "All-In-One" Z-89 Microcomputer

Inseq-80(TM) Business Software Systems
Industry Standard Osborne Based: Accounts Payable/Receivable, General Ledger, Payroll

S & M Software: Retail Inventory Control, Invoicing, Manufacturers Inventory Control, Customer Mail List

PLUS MANY MORE!!

All Systems have been Field Tested and are ready for shipment!
CALL ABOUT OUR NATIONAL DEALER PROGRAM AND JOIN THE BEST IN SELLING THE FINEST SOFTWARE ON THE Z-80 MARKET!

SYSTEMS ALSO OPERATE ON TRS-80 MOD I, MOD II, MOD III AND ALTOS MICROCOMPUTERS

For Further Information, Contact: **S & M Systems, Inc.**
P. O. Box 1225
Haverhill, Massachusetts 01830

Or Dial Direct: 1-617-373-1599
1-617-481-5231

NEVADA COBOL

For CP/M

Powerful subset of ANSI-74

Order now!
All the elegant simplicity of COBOL is now affordable!

DISKETTE & MANUAL **$99.95**

REQUIRES only 16K RAM. **Available** on 8" CP/M standard single density or 5¼" diskettes for North Star, TRS-80 Mod I and Superbrain. Other formats too! Manual alone $24.95.

These powerful, easy to use **COBOL APPLICATION PACKAGES** are also available:

1. **BUDGET PLAN REPORT GENERATOR**
   Fantastic time saver and planning aid for beginning or established businesses.
2. **PERSONAL FINANCIAL REPORTING**
   Eye-opening insights of personal spending.
3. **LABELS** for mailing lists.
4. **PRECOBOL** (a preprocessor).

ALL 4 in one BOOK!
73 pages with complete COBOL source code listings and super documentation.

$24.95


WE ACCEPT

master charge VISA

GO FOR IT!

Ellis Computing
1480 17th Avenue
San Francisco, CA 94122
(415) 664-1534

In CA add sales tax. CP/M trade mark of Digital Research. TRS-80 trade mark of Tandy Corp.

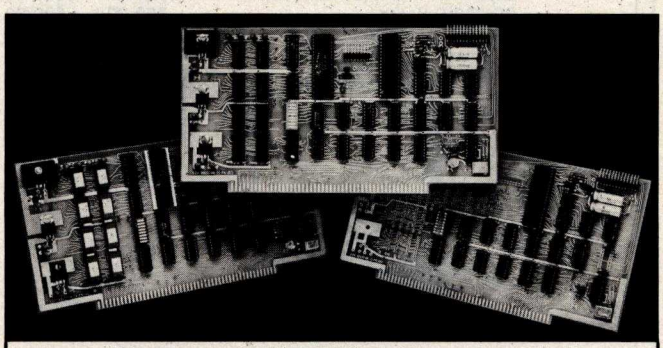

COLOR VIDEO PROCESSOR
• Text, Graphics, Animation • 16 Colors • 256 x 192 Resolution • NTSC Composite Video Output • Uses TMS 9918 • Includes I/O Mapped 16K Video Memory • 3D Simulation with 32 Video Sprites • 2 Byte X-Y Positioning • Real Time Clock • 8 Level Interrupt Selection • Inexpensive RF Modulator allows easy connection to any color TV •

PROGRAMMABLE SOUND GENERATOR
• Music, Sound Effects, Tone Signaling, Ultrasonics • 27 Hz to 111 KHz Range • 3 Programmable Analog Channels with Separate Frequency, Volume and White Noise Control • 10 Selectable Envelope Wave Shapes under Software Control • Two 8-Bit Programmable I/O Ports for use as External Keyboard/Display Interface • Power Amplifier for driving External Speaker •


INTRODUCTORY OFFER

SINGLE BOARD COLOR VIDEO AND SOUND GENERATOR KIT..$350
COLOR VIDEO KIT $295
SOUND GENERATOR KIT $195

Texas residents add 5% sales tax. Prices include complete documentation, manuals and programming examples. PC board is solder-masked with gold contacts. Add $100 for assembled and tested units. Send $9.50 for documentation only, refundable with order. Compatible with Z80, 8085 and 8080 at 2 or 4 MHz on S-100 buss.


EDA **ELECTRONIC DESIGN ASSOCIATES**
P.O. Box 94055 Houston, Texas 77018 (713) 999-2255

Circle 221 on inquiry card.

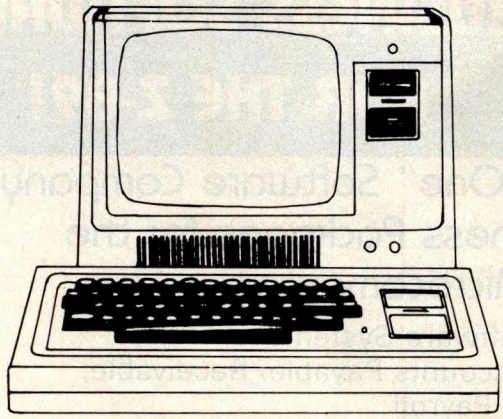


MODEL I $699

	LIST PRICE	OUR PRICE
Model-I, Level-II, 4K	$649.00	$619.00
Model-I, 16K no Keypad	$768.00	$669.00
Model-I, 16K w/Keypad	$849.00	$729.00
Model-II, 64K RAM	$3899.00	$3799.00
Model-III, 16K RAM	$999.00	$929.00
Model-III, 32K Dual Disk	$2495.00	$2299.00
Pocket Computer w/Interface	$298.95	$269.00
TRS-80 Color Computer	$399.00	$359.00
TRS-80 Color Computer Expanded	$599.00	$519.00
COMM-80 Interface	$179.95	$159.95
CHATTER BOX Interface		$259.95
DISK-80 Interface	$349.95	$329.95
Expansion Interface, no RAM	$299.00	$279.00
Expansion Interface, 16K RAM	$418.00	$339.00
Expansion Interface, 32K RAM	$537.00	$399.00
RS-232-C Board	$99.00	$89.00

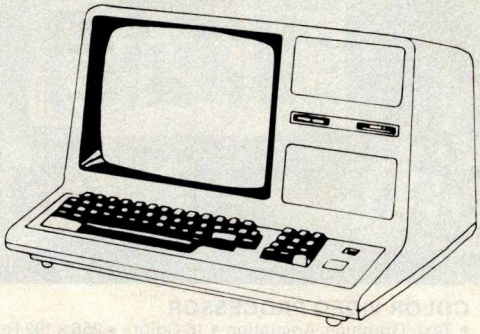


MODEL III $929



POCKET COMPUTER $269

with interface

	LIST PRICE	OUR PRICE
TRS-232 Printer Interface		$59.95
16K Memory Kit, TRS-Keypad	$119.00	$59.00
16K Memory Kit, TRS-Exp. Int.	$119.00	$59.00
Upper/lower Mod Kit	$59.00	$24.95
Video Reverse Kit		$23.95
CPU Speed-up Kit		$24.95
Data Dubber		$49.95
Percom Electric Crayon, w/cable		$279.95
TRS-80 Dust Cover (3pc set)	$9.95	$7.95
TRS-80 Computer Case	$109.00	$99.95
TRS-80 Monitor Case	$84.00	$84.00

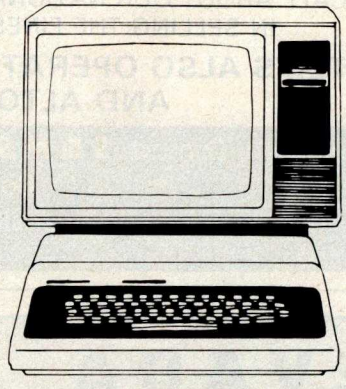

COLOR COMPUTER $359

	LIST PRICE	OUR PRICE
Percom, TFD-100, 40-track	$429.95	$399.00
Percom, Dual TFD-100 Drives	$849.00	$799.00
Percom, TFD-40, 40-track	$399.95	$379.00
Percom, TFD-200, 77-track	$675.00	$629.00
Hardside, 40-track Disk Drive	$399.00	$359.00
Percom Data Separator		$29.95
Percom Extender Card	$15.95	$15.00
2-Drive Cable	$29.95	$29.00
4-Drive Cable	$39.95	$39.00

TERMS:

TERMS: Prices and specifications are subject to change. HARDSIDE accepts VISA & MASTERCARD. Certified checks and Money Orders; Personal checks accepted (takes 3 weeks to clear). HARDSIDE pays all shipping charges (within the 48 states) on all PREPAID orders OVER $100.00. On all orders over $100 a $2.50 handling charge must be added. COD orders accepted (orders over $250 require 25% deposit) there is a $5.00 handling charge. UPS,Blue Label, and Air Freight available at extra cost.

TO ORDER TOLL-FREE:


1-800-258-1790

(In NH call 673-5144)

MasterCard VISA

HARDSIDE™

Circle 222 on inquiry card.

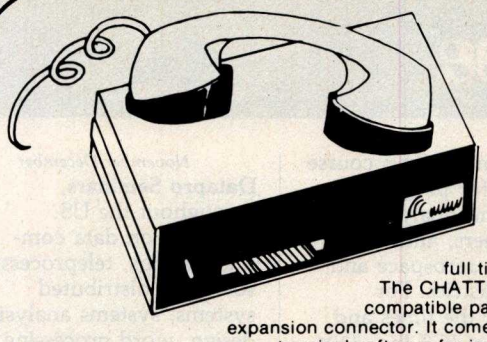

The Chatterbox

A TRS-80 Interfacing Alternative

The CHATTERBOX is a unique packaging combination of the presently available COMM-80 I/O Interface for the TRS-80* and an acoustic modem. This one box is all that is required to turn even a barebones 4K TRS-80* into a full time–sharing terminal.

The CHATTERBOX includes built-in programmable 50-19200 baud serial port, a Centronics compatible parallel printer port, a 300 baud acoustic originate modem, and a spare TRS-BUS expansion connector. It comes complete with power supply, ribbon cable and connector, user's manual, and terminal software for immediate operation. When the modem is in use, the complete data conversion is automatically routed to the serial output port where it can be logged on a printer.

The CHATTERBOX is the only peripheral needed to allow a TRS-80* to communicate with time–sharing systems such as MICRONET and the SOURCE.

It is completely hardware and software compatible with existing TRS-80* products and connects either to the keyboard connector or screen printer port on the RS Expansion Interface. Features: Full 8-bit parallel port; RS-232-C serial port (up to 19,200 baud); Acoustic modem; TRS-BUS connector for future expansion; Connects to Keyboard or E.I.; Includes terminal software; Users manual; Power supply. $259.95

PRINTERS

	LIST PRICE	OUR PRICE
Centronics 730	$795.00	$749.00
Centronics 730-3	$895.00	795.00
Centronics 737	$995.00	$869.00
Centronics 779	$1395.00	$1095.00
Centronics 779 w/lower case	$1595.00	$1195.00
NEC 5510 SpinWriter	$3195.00	$2595.00
NEC 5520 SpinWriter	$3395.00	$2895.00
NEC 5530 SpinWriter	$3195.00	$2495.00
NEC Tractor-Feed Option	$249.00	$225.00
LRC 7000® (64-col.)	$405.00	$299.00
LRC 7000® (40-col.)	$389.00	$289.00
Okidata Microline-80	$800.00	$699.00
Tractor-Feed Option	$140.00	$129.00
RS-232-C Option	$299.00	$279.00

LRC to TRS-80	$20.00
LRC to PET, IEEE	$59.00
LRC to RS232C, male or female	$65.00
730 or 737 to TRS-80	$29.00
NEC or 779 to TRS-80	$35.00
RS-232-C to RS-232-C, male to male	$24.95

GENERAL INTEREST


	LIST PRICE	OUR PRICE
BSR System X-10 Home Controller	$124.95	$109.95
BUSY BOX, TRS-80	$114.95	$99.95
BUSY BOX, S-100	$119.95	$114.95
AC-SFK-31 Line Filter	$24.95	$19.95
ISO-2 Line Filter & Isolator	$56.95	$49.95
ISO-2/CBS Line Filter-Isolator	$70.95	$59.95
ISO-7/CB Super Filter-Isolator	$146.95	$99.95
Mini-Flex Diskette File	$24.95	$19.95
CASIO C-80 Calculator Watch	$49.95	$44.95
BONE FONE	$69.95	$56.95
LOGOS-9 Printing Calculator	$99.95	$79.95

SPECIAL




CASIO C-80 CALCULATOR WATCH $44.95

(plus $2.50 postage and handling)



BONE FONE $56.95

(plus $2.50 postage and handling)



OLIVETTI LOGOS-9 PRINTING CALCULATOR $79.95

(plus $2.50 postage and handling)

TO ORDER TOLL-FREE
1-800-258-1790
(In NH call 673-5144)

MasterCard VISA

HARDSIDE™

Circle 222 on inquiry card.

Event Queue

November 1980

November-February

Courses from Integrated Computer Systems Inc, throughout the US. Courses are being offered on VIO—Voice Input/Output for Computers and Programming in Ada. The VIO course will teach participants to apply voice-processing algorithms and software, utilize speech synthesis techniques, and design voice-recognition systems. There will be systems on which students can learn. Programming in Ada will cover language features, structured programing, interrupt handling, external I/O (input/output) interfaces, and more. This course is designed for programmers, systems analysts, software engineers, and for those in the aerospace and defense industries. For schedules of the times and cities, contact ICS Inc, 3304 Pico Blvd, POB 5339, Santa Monica CA 90405, (213) 450-2060.

November-December

Datapro Seminars, throughout the US. Seminars on data communications, teleprocessing software, distributed systems, systems analysis design, word processing, and more, will be given. The enrollment fee is $530 for current Datapro subscribers and $580 for non-subscribers. For information on when and where the seminars are being held, contact Datapro Research Corporation, 1805 Underwood Blvd, Delran NJ 08075, (609) 764-0100.

November-February

Courses from Harvard, throughout the US, and in London, England. Business graphics, digital-image processing, computer mapping, computer graphics, and information systems for natural resources, are some of the one- and two-day courses being sponsored by the Harvard Graduate School of Design Laboratory for Computer Graphics and Spatial Analysis. For a complete schedule, contact the Laboratory in Cambridge MA 02138, or contact Karen Smolens, Center for Management Research, 850 Boylston St, Chestnut Hill MA 02167.

November 8

Fall 1980 California Com-

In order to gain optimal coverage of your organization's computer conferences, seminars, workshops, courses, etc, notice should reach our office at least three months in advance of the date of the event. Entries should be sent to: Event Queue, BYTE Publications, 70 Main St, Peterborough NH 03458. Each month we publish the current contents of the queue for the month of the cover date and the two following calendar months. Thus a given event may appear as many as three times in this section if it is sent to us far enough in advance.

Waiting On Delivery of A DEC LA120?




Avoid the hassle by upgrading your LA36 for 1200 baud operation with a DS120 Terminal Controller.

The Datasouth DS120 gives your DECwriter® II the high speed printing and versatile performance features of the DECwriter® III at only a fraction of the cost. The DS120 is a plug compatible replacement for your LA36 logic board which can be installed in minutes. Standard features include:

- 165 cps bidirectional printing
- Horizontal & Vertical Tabs
- Page Length Selection
- 110-4800 baud operation
- 1000 character print buffer
- X-on, X-off protocol
- Self Test
- RS232 interface
- 20 mA Current Loop interface
- Top of Form
- Adjustable Margins
- Double wide characters
- Parity selection
- Optional APL character set

Over 4000 DS120 units are now being used by customers ranging from the Fortune 500 to personal computing enthusiasts. In numerous installations, entire networks of terminals have been upgraded to take advantage of today's higher speed data communications services. LSI microprocessor electronics and strict quality control ensure dependable performance for years to come. When service is required, we will respond promptly and effectively. Best of all, we can deliver immediately through our nationwide network of distributors. Just give us a call for all the details.

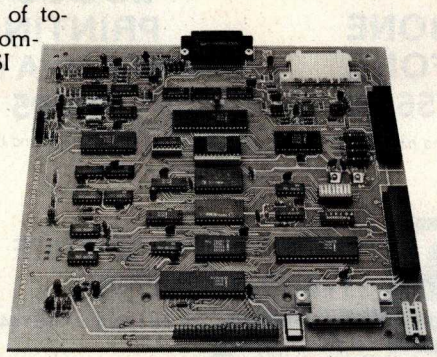

DATASOUTH COMPUTER CORPORATION

4740 Dwight Evans Road • Charlotte, North Carolina 28210 • 704/523-8500

Circle 223 on inquiry card.

Circle 224 on inquiry card.


CAT-100 FULL COLOR GRAPHICS

Complete line of color imaging systems with high resolution real time video FRAME GRABBER for the S-100 bus.


Capture and digitize a video frame in 1/60th of a second. Store up to 2 million bits of image data in on-board buffer. By software, select the best resolution for your application from 256 to 1280 pixels per TV line. Display your digitized image or your computer processed image with up to 256 gray levels or 65,536 simultaneous colors on standard B/W, NTSC or RGB color TV monitors.




480x512 Contoured digitized image



240x256 Digitized image, 16 levels




480x512 Computer-generated



240x256 Digitized image, 16 levels

ROBOTICS-AUTOMATED COUNTING AND MEASURING-QUALITY CONTROL MONITORING-PATTERN RECOGNITION-IMAGE PROCESSING-MEDICAL AND SCIENTIFIC RESEARCH

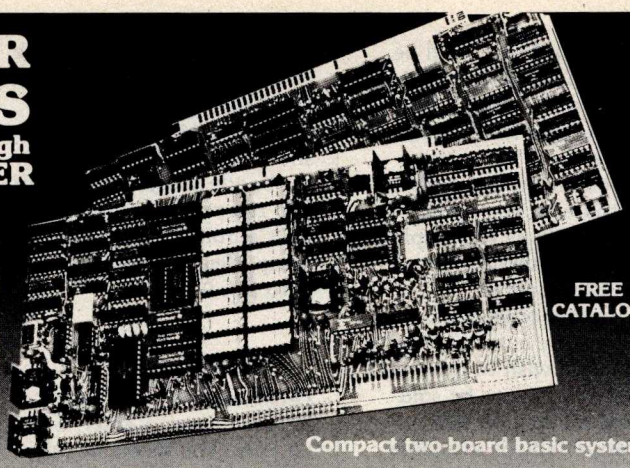

Compact two-board basic system

FREE CATALOG

Features:

- Highest quality 480x512x8 digital video image
- Input capability from TV cameras or other sources
- Variety of synchronization choices
- 2 selectable video A/D conversion circuits
- Choice of 1, 2, 4, 8, 16 or 24 bits per pixel
- 32K-byte image memory on the basic system
- 64K, 128K, 192K and 256K-byte system capacity
- High resolution lightpen input
- Photographic trigger control input
- Software selectable system parameters
- Stand-alone intelligent graphics unit with universal interface

Accessories:

- RGB color monitor
- High performance lightpen
- Hard copy printer/plotter
- Software packages available

DIGITAL GRAPHIC SYSTEMS

441 California Avenue
Palo Alto, CA 94306
415/494-6088

Disc/3 MART, INC.

GO FOR IT!

FOR PRICE, QUALITY & RELIABILITY

ADDS REGENT 25	$ 875.00
ANACOM Printer (Ser./Par.) 150CPS	1095.00
ANADEX Printer DP-8000	925.00
ANADEX Printer DP-9500/9501	1425.00
BASE 2 Printer with options	599.00
CENTRONICS Printer 779 w/tractor	975.00
CENTRONICS Printer 730 (Parallel)	675.00
CENTRONICS Printer 737 (Parallel)	825.00
EATON Dot Matrix Parallel	399.00
EPSON TX80 Tractor Feed/Graftrax	Call
MICRO-TERMS	Call
NEC SPINWRITER 5510 R.O./forms tractor	2725.00
TELEVIDEO 920-B	795.00
TI 99/4 Personal Computer/monitor	925.00
TRIMM—Printer Stand with basket	95.00

CALL FOR QUOTES ON ANY OTHER MICRO PRODUCTS

We are dealers for BASF, DYSAN, 3M(SCOTCH) Diskettes, Cartridges, Mag Tape, etc. In addition we carry a complete line of Printer Ribbons and other data processing accessories.

Disc/3 MART, INC.

1840 LINCOLN BLVD.,
SANTA MONICA, CA 90404
(213) 450-5911

Circle 225 on inquiry card.

JOE COMPUTER Presents Exclusive Software:*

IT'S FOOTBALL SEASON!

Pro and College Football from SDL:
A TRS 80† translation of Ken Perry's popular Apple programs. These programs predict point spreads with unbelievable accuracy. They are heuristic and require about 10 minutes a week to record the weekend's results into the data base from your local newspaper. You may predict any game within seconds from the data saved on cassette or disk. Pro Football contains all 28 pro teams. College football contains an unbelievable data base of 78 teams! Each program comes with the entire 1979 season data file on cassette or disk. You can display each team's record of scores or won-loss record. A record of 4-5 weeks is required before predictions are effective so you're just in time! Pro or College Football will be shipped U.P.S. blue label the same day order is received. Order C.O.D. by phone. $1.00 blue label charge; C.O.D. fees added on.

Pro Football Cassette (32K TRS 80 Level II) **$21.95**
Disk **$26.95**
College Football Cassette (48K TRS 80 Level II) **$21.95**
Disk **$26.95**

Horse Race Handicapping!
Probability Handicapping Device 1 was written by a professional software consultant to TRW Space Systems. This is a complex program carefully human factored for easy use. It is a comprehensive horse racing system for spotting overlays in thoroughbred sprint races. Your computer will accurately predict the win probability and odds line for each horse based on your entries from the racing form. The next day overlaid horses can be spotted on the track tote board. The users manual contains a complete explanation of overlay betting plus much more useful information. The appendix contains a detailed tab run of a 100 consecutive race system workout showing an amazing 50% return ($.50 returned for each $1.00 flat wager). Includes many features such as error correction, bubble sort, line printer output, archiving, etc. The manual may be ordered seperately for perusal for $7.95 and credit. **PHD-1 users manual and cassette for: 8K Apple II Applesoft, 8K Challenger (specify 1P or 4P), TRS-80 16K Level II** **$29.95**
Apple or TRS-80 Disk **$34.95**

Brand new from SDL: Win At The Races another Ken Perry spectacular! This algorithm is based on a currently popular book representing the most ambitious multiple regression research on thoroughbred racing to date. The probable odds and win probability for each horse are displayed. Line printer output, error correction, descending sort; all the niceties!

Win At The Races cassette (32K TRS-80 Level II) **$34.95**
Disk (48K TRS-80 Level II) **$39.95**

THE BOOK for the Computerized Handicapper!
WINNING AT THE RACES by William Quirin Ph.D. Computer science has come to the rescue of the racing fan. This is the first major scientific study of handicapping available to the general public, detailing what the computer reveals about class, form, early speed, and more; plus special multiple regression computer systems. A Tom Ainsle — winners circle book.

Winning At The Races **$21.95**
+ $.75 P & H

Order now to get on our list and receive back issues free!
Phone Orders: Mike (213) 992-0514 Systems Design Lab (213) 374-4471

Make Checks payable to: **JOE COMPUTER**
22713 Ventura Blvd., Suite F, Woodland Hills, CA 91364

*Get on the Computers & Gambling Products mailing list for $3.00 & receive available back issues
Calif. res. add 6% tax. †TRS-80 is a Registered Trademark of Tandy Corporation

Circle 226 on inquiry card.

puter Swap Meet will be held in the Gateway Hall at the Santa Clara County Fairgrounds 344 Tully Rd, San Jose CA. Show times are from 10 AM to 8 PM.

Manufacturers, stores, and individuals will display both top-of-the-line and used merchandise.

A special consignment table will be available for those who wish to drop off an item or two to be sold during the day. A free literature table is available to anyone within the industry. Admission to buyers will be through the purchase of a redeemable $5 purchase certificate. Sellers, both individuals and companies, should call (415) 966-6546 for booth prices, availability and reservations. Or, write to: California Computer Swap Meets, POB 52, Palo Alto CA 94302.

November 8-9

Personal Computer Fair, Pacific Science Center, Seattle WA. The theme of this year's fair is "Hands On." Both the booths and the exhibits will reflect this idea, and the public will have access to as many computers and terminals as possible. Contact The Northwest Computer Society, POB 4193, Seattle WA 98119, (206) 284-6109.

November 10-13

The Fourth Annual Data-Entry Management Conference, Orlando FL. The theme of this conference is "Improving Productivity and the Quality of Working Life." This conference will cover data entry, distributed processing, and word processing with emphasis on data entry, including human-machine interface. Contact Data Entry Management Association, POB 3231, Stamford CT 06905, (203) 322-1166.

November 11-13

Eleventh Annual Canadian Computer Show and Conference, International Centre, 6900 Airport Rd, Toronto, Ontario. Computers and data-processing equipment, supplies and services, disk drives, terminals and printers, telecommunications equipment, software, and other related items will be displayed. Seminars and tutorials will also be included. Contact Industrial Trade Shows of Canada, 36 Butterick Rd, Toronto, Ontario M8W 3Z8, Canada.

November 12


National Conference on the Use of On-Line Computers in Psychology, St Louis MO. This conference is for computer users in psychology and related disciplines. These users will consider the use of computers in research, clinical practice, and teaching. Tutorial sessions will be included. Contact Dr Dominic Massaro, Program in Experimental Psychology, University of California, Santa Cruz CA 95064.

November 13-16

The 1980 International Computer Music Conference, Queens College, Flushing NY. This conference is for persons interested in computer applications in music. Conference activities include presentation of papers, concerts, workshops, panel discussions, meetings of special interest groups, demonstrations, and an exhibition of computer music equipment. For information, contact Dr Hubert S Howe Jr, Director 1980 International Computer Music Conference, Queens College, Flushing NY 11367, (212) 520-7342.

November 17-21

Integrated Circuit Engineering, Bergamo Center, 4435 E

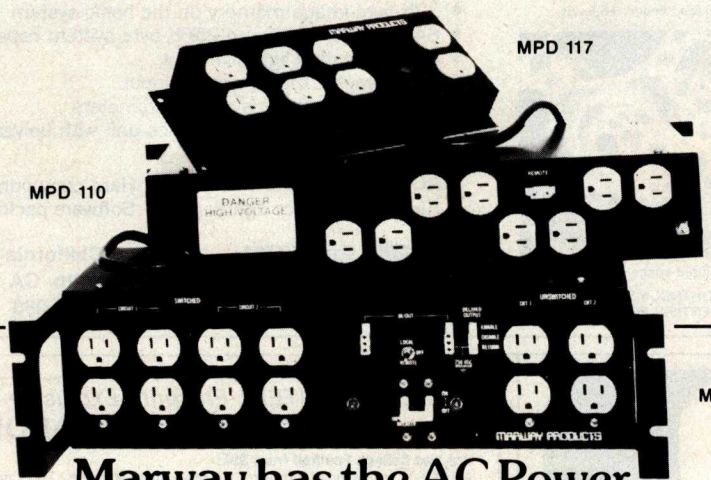


Marway has the AC Power Controller For Your System.

You'll find the ideal solution to AC power distribution needs in Marway's proven family of power controllers. From home audio visual centers to a time shared maxicomputer system. Marway products will stop "glitches", surges and unwanted line noises.

MPD 110 Series of 3½" rack mount AC power controllers

- Low Price
- 10 outlets—8 switched (remote option), 2 unswitched (direct)
- 115 VAC and 230 VAC models
- 15 amp capacity
- High performance EMI filter
- Optional remote control



MPD 115 Series of DEC Compatible Controllers

- Interchangeable with DEC model 861 and priced 40% less
- 12 outlets—8 switched, 4 unswitched (direct)
- 115 VAC and 230 VAC models
- Up to 30 amp capacity
- High performance EMI filter
- Optional delayed output and optional power fail restart

MPD 117 low-cost AC power distribution

- Minimum cost
- 8 outlets—6 switched, 2 unswitched (direct)
- 10 amp capacity
- High energy EMI filter
- Transient suppressor

All Marway Power Controllers provide organized, noise-free power distribution of standard AC current to eliminate frequently experienced line transients and associated problems. They turn a single wall outlet into a controlled power source. Contact Marway today.

Marway can solve your power distribution problems and save you money.

MARWAY PRODUCTS INC.

2421 South Birch Street, Santa Ana, CA 92707 (714) 549-0623


Circle 227 on inquiry card.

Circle 228 on inquiry card.

Picture your data

with x,y Genesis


APPLESOFT* Subroutines Package . . **$74.95**

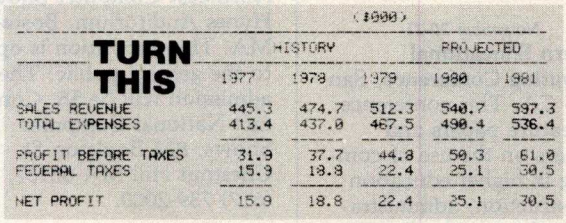

TURN THIS

($000)

	HISTORY			PROJECTED	
	1977	1978	1979	1980	1981
SALES REVENUE	445.3	474.7	512.3	540.7	597.3
TOTAL EXPENSES	413.4	437.0	467.5	490.4	536.4
PROFIT BEFORE TAXES	31.9	37.7	44.8	50.3	61.0
FEDERAL TAXES	15.9	18.8	22.4	25.1	30.5
NET PROFIT	15.9	18.8	22.4	25.1	30.5

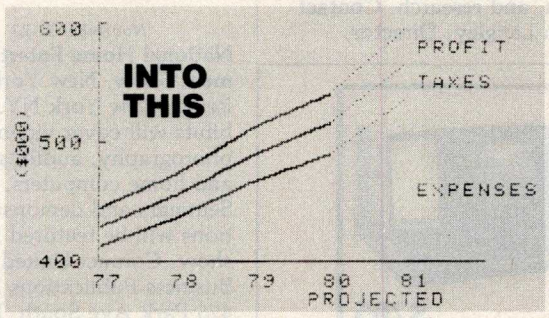

for the **total picture** of your business or scientific data.

- The most FLEXIBLE coordinate graphics package available for the APPLE II* Computer.
- Add a new dimension of meaning to your data. Graphics means your data will convey more information, faster, and it will be retained longer.
- Standard formats for PIE CHART, BAR CHART, SCATTER PLOT, and LINE PLOT are included.
- User-definable character sets.
- Hard copy - dump graphics screen to printer.

Custom OEM Licenses and Dealer Discounts Available.

▪▪▪▪▪▪▪VisiCalc™ Models▪▪▪▪▪▪▪

For the APPLE II* Computer.

SAVE HOURS OF SETUP TIME.

VISIBLE BOOKKEEPER **$59.95**
Nine basic bookkeeping models with instructions for adapting to your own small business.

BUSINESS PROJECTOR **$39.95**
Basic one year projection with Cash Flow, P & L, Balance Sheet, and Common Ratios.

▪▪▪▪Selected Software Tools▪▪▪▪

VISICALC **$150.00**
Throw away your pencil and paper with this Matrix Problem Solver from Software Arts, Inc.

INFORMATION MASTER **$150.00**
THE most powerful and easiest to use Data Management System from High Technology, Inc.

Software with a future from

FUTUREWORLD

2514 UNIVERSITY DRIVE Dept. B-11
DURHAM, NORTH CAROLINA 27707
(919) 489-7486

*Trademark of APPLE COMPUTER, INC.

Circle 229 on inquiry card.

REFORMATTER™

Now There Are Three!

REFORMATTER™ diskette conversion software now includes 3 programs for transferring information bidirectionally via floppy diskette medium:

CP/M®↔DEC gives the CP/M® user complete access to DEC formatted diskettes. Provides complete facilities for file reorganization and directory maintenance along with editing capabilities.

TRSDOS↔IBM gives the Radio Shack® Mod II user complete access to IBM 3740 formatted diskettes. Provides complete facilities for character translation, file reorganization and directory maintenance, along with editing capabilities.

CP/M®↔IBM, the original ***REFORMATTER***™ now available with enhanced features, gives the CP/M® user complete access to IBM 3740 formatted diskettes. Provides complete facilities for character translation, file reorganization, and directory maintenance, along with editing capabilities.

REFORMATTER™ programs require a multiple drive system with at least one 8" single density drive.

REFORMATTER™ is available at $195.00 per program. For detailed information contact:

MicroTech Exports
467 Hamilton Avenue, Suite 2
Palo Alto, California 94301
415/324-9114 ■ TWX: 910-370-7457 MCH-ALTOS

Dealer & OEM discounts available

CP/M is a registered trademark of Digital Research.
Radio Shack is a registered trademark of Tandy Corp.

Bridge the GAP in your Business Accounting.

GENERAL ACCOUNTING PACKAGE. This is a proven double entry accounting system with user definable accounts. The account numbers are made up of 7 4-digit fields allowing 7 levels of account classifications. With the use of the **Operator Report Selector Generator** (ORSG), you can generate any type of report you desire, or use report programs in GAP-GL, GAP-AP, and GAP-AR.

GAP-GL Includes all basic GAP functions, plus entry of General Ledger transactions, prints General Journal, General Ledger summary and detail, Balance Sheet, Profit and Loss . . . . . Price $124.95

GAP-AR Requires GAP-GL to run, allows adding A/R invoices, printing Sales Journal, detail A/R report, Account Aging, add/update Cash Receipts with register, Cash Receipts Journal, and A/R Billing . Price $99.95

GAP-AP Requires GAP-GL to run, allows adding of A/P invoices, printing Purchase Journal, detail A/P report, Aging of Accounts, Check Writing, Check Printing, Cash Disbursements Journal . . . . . Price $99.95

SAVE NOW by purchasing all three packages for only $299.95. Simply mention this ad when calling in your order, or send the ad with you mail order.

Your **BA/VISA** or **MasterCard** is welcomed.
Call today to receive complete package specifications.

System requirements are 48K CP/M *CP/M is registered trademark of Digital Research*

PROFESSIONAL DATA SYSTEMS
318 E 18 St.
BAKERSFIELD, CA 93305
Telephone (805) 323-0891

Circle 230 on inquiry card.

Patterson Rd, Dayton OH 45430. This course is designed for engineers, scientists, managers, and others who need a broader understanding of the design, fabrication, and testing of integrated circuits. The fee is $635. For information, contact the Director, Continuing Engineering Education, George Washington University, Washington DC 20052, (202) 676-6106, or toll free (800) 424-9773.

November 18-20

The Third Industrial Revolution, McCormick Place, Chicago IL. This show is an exposition and conference devoted to development by manufacturing companies of systems for information management. Information may be obtained from Banner & Grief Ltd, 110 E 42nd St, New York NY 10017, (212) 687-7730.

November 19-21

Comdex, Las Vegas Convention Center, Las Vegas NV. Comdex is a conference and exposition for independent sellers of small-computer and word-processing systems, peripherals, media, and supplies. Address inquiries to The Interface Group, 160 Speen St, Framingham MA 01701, (800) 225-4620.

November 20-21

Western Educational Computing Conference, San Diego CA. This conference will feature papers and seminars on the use of computing in higher education for instruction, administration, and research. Contact Ron Langley, Director, Computer Center, California State University, Long Beach, 1250 Bellflower Blvd, Long Beach CA 90840, (213) 498-5459.

November 20-23

Northeast Computer Show, Hynes Auditorium, Boston MA. This exposition is open to the general public. The admission will be $5. Contact National Computer Shows, 824 Boylston St, Chestnut Hill MA 02167, (617) 739-2000.

November 21-23


National Home Entertainment Show, New York Coliseum, New York NY. Exhibits will cover video, photography, audio, games, and home computers. Seminars and demonstrations will be featured in this show. Contact United Business Publications Inc, 475 Park Ave South, New York NY 10016, (212) 725-2300.

November 24-25

Computer Equipment Registration, George Washington University, Washington DC. This course will review the FCC's Part 15 rules dealing with RF (radio frequency) emissions by computers. Technical considerations governing the classifications for computers, peripherals, and other related devices will be described. Contact the GWU Continuing Engineering Education Program, Washington DC 20052, (800) 424-9773.

November 25-27

Semiconductor International '80, Metropole Convention Centre, Brighton, England. This exhibition is devoted completely to production of semiconductor components, and displays will cover all areas of technology. A technical conference program will cover mask-making procedures, VLSI (very large-scale integration), crystal growth technology, thin film technology, bonding, memory testing, and more. Contact Kiver Communications SA, 171/185 Ewell Rd, Surbiton, Surrey, KT6 6AX, England.

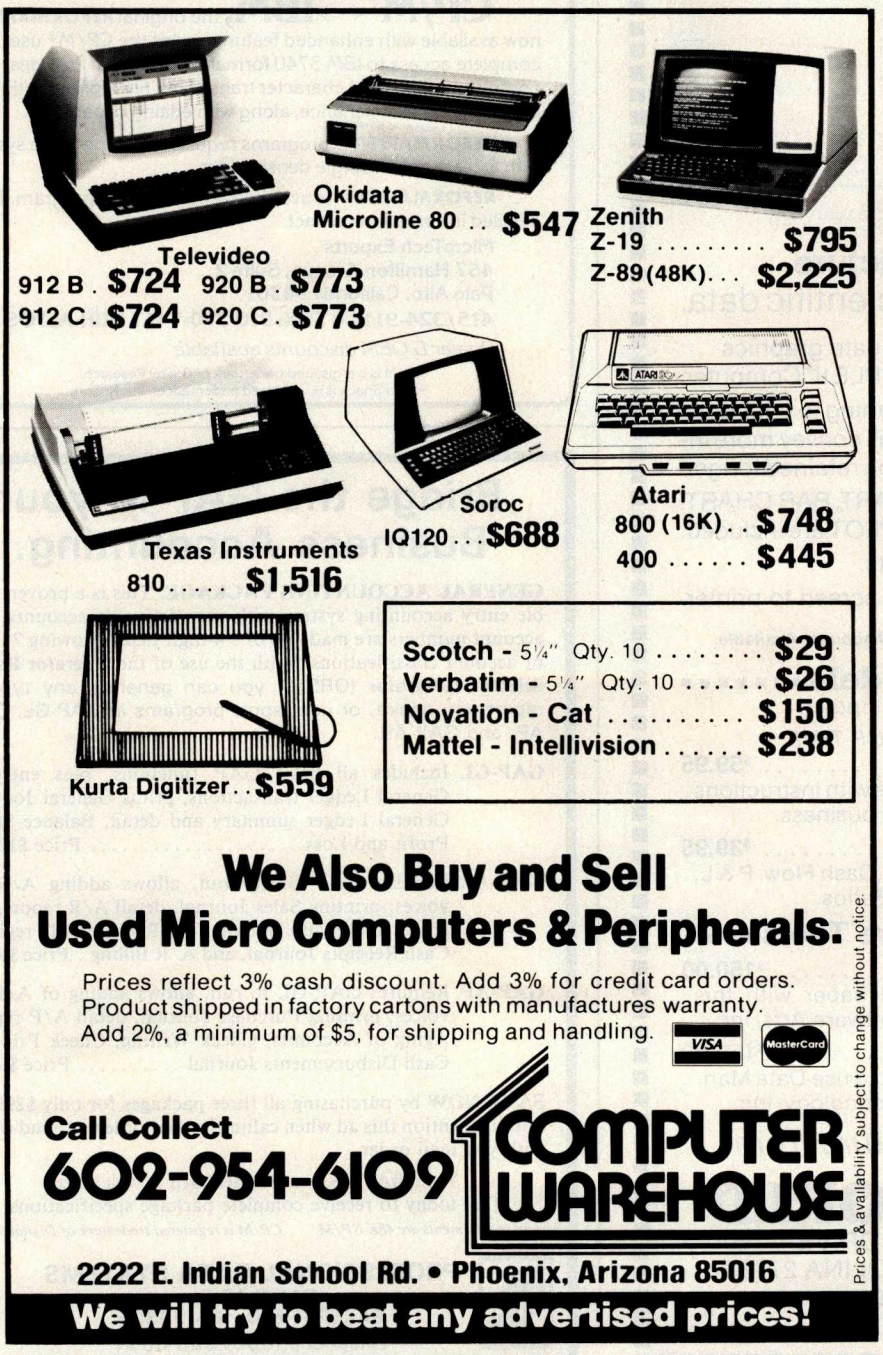

Circle 231 on inquiry card.

Circle 232 on inquiry card.

Circle 233 on inquiry card.

StackWork's

FORTH

A full, extended FORTH interpreter/compiler produces COMPACT, ROMABLE code. As fast as compiled FORTRAN, as easy to use as interactive BASIC.

SELF COMPILING
Includes every line of source necessary to recompile itself.

EXTENSIBLE
Add functions at will.

CP/M* COMPATIBLE

Z80 or 8080 ASSEMBLER included

Single license
Supplied with extensive user manual and tutorial: $150.00
Documentation alone: $25.00

OEM's, we have a deal for you!

CP/M Formats: 8" soft sectored, 5" Northstar, 5" Micropolis Mod II, Vector MZ, TRS-80 Mod II

Please specify CPU type.
Z80 or 8080

All Orders and General Information:
SUPERSOFT ASSOCIATES
P.O. BOX 1628
CHAMPAIGN, IL 61820
(217) 359-2112
Technical Hot Line: (217) 359-2691
(answered only when technician is available)

master charge
VISA

SuperSoft
First in Software Technology

*CP/M registered trademark Digital Research

Model EP-2A-87
EPROM Programmer



The Model EP-2A-87 EPROM Programmer has an RS-232 compatible interface and includes a 2K or 4K buffer. During the ON-LINE mode, another computer can down-load to the buffer. Only two easy-to-implement commands are available to an external computer. (Load buffer and read buffer.)

In the OFF-LINE mode, the EP-2A-87 will program, verify, test buffer, and load the buffer from the EPROM socket. During the programming cycle, the EPROM is checked before programming to insure that it is erased and after programming it automatically verifies that programming is correct. Power requirements are 115 VAC 50/60 Hertz at 15 watts.

Part No.	Description	Price
EP-2A-87-1	Programmer with 2K buffer	$525.00
EP-2A-87-2	Programmer with 4K buffer	600.00
	Non standard voltage option (220 v, 240 v, 100 v)	15.00
PM-0	Personality Module, programs TMS 2708	26.00
PM-1	Personality module, programs 2708	26.00
PM-2	Personality module, programs 2732	31.00
PM-3	Personality module, programs TMS 2716	26.00
PM-4	Personality module, programs TMS 2532	31.00
PM-5	Personality module, programs 2716, TMS 2516	16.00
PM-6	Personality module, programs 2704	26.00
PM-7	Personality module, programs 2758, TMS 2508	16.00
PM-8	Personality module, programs Motorola MCM68764	34.00
MS-XX	Disk driver software	27.50


Optimal Technology, Inc.
Blue Wood 127
Earlysville, Virginia 22936
Phone (804) 973-5482

VT-100 GRAPHICS



- Vector Plotting
- 1220 x 240 Dots/Screen
- Light Pen and Software Options
- $1200

DECwriter® GRAPHICS

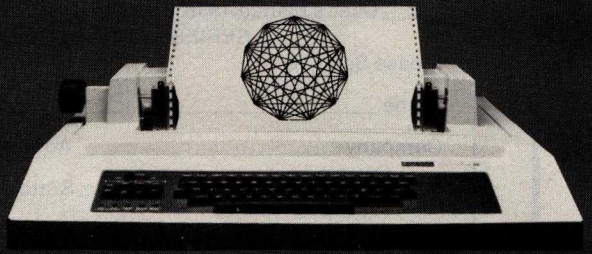

- Vector Plotting
- Many DEC Options
- 1320 x 792 Dots/Page
- $1060

SELANAR (408)727-2811
CORPORATION
2403 De La Cruz Blvd., Santa Clara, CA 95050

Circle 234 on inquiry card.

December 1980

December 2-5
The Eleventh International Conference of the Computer Measurement Group, Sheraton-Boston Hotel, Boston MA. This conference is entitled "Computer Performance Evaluation in the 80s." Contact Judith G Abilock, Price Waterhouse and Company, Office of Government Services, 1801 K St NW, Washington DC 20006, (202) 296-0800.

December 3-5
The 1980 Winter Simulation Conference, Orlando Marriott, Orlando FL. This conference will feature papers, panel discussions, tutorials, and review sessions on discrete and combined simulations. Contact Professor Tuncer I Ören, Chairman, Department of Computer Science, University of Ottawa, Ottawa, Ontario K1N 9B4, Canada, (613) 231-5420.

December 3-5
Implementing Computer-Based Human Resource Systems, New York NY. This is a seminar for planning, organizing, and implementing a comprehensive system for the human resources area. It will demonstrate ways to set up a useful personnel record-keeping system. The course fee is $695. For information, contact The University of Chicago, Center for Continuing Education, MC Seminar Division, 1307 E 60th St, Chicago IL 60637, (800) 223-7450.

December 4
California Computer Shows, Hyatt-Palo Alto, Palo Alto CA. Show hours are from 1 to 7 PM. OEM (original equipment manufacturers) and end-user computer and peripheral products will be exhibited and demonstrated by over sixty companies. Contact Norm De Nardi Enterprises, 95 Main St, Los Altos CA 94022, (415) 941-8440.

December 10
1980 Computer Networking Symposium, Gaithersburg MD. The symposium is sponsored by the IEEE Computer Society, Technical Committee on Computer Communications, and the Institute for Computer Sciences and Technology of the National Bureau of Standards. The focus is on office automation, office system components, and the computer networks required to interconnect them. For information, contact Executive Secretary, POB 639, Silver Spring MD 20901, (301) 439-7007.

condor
COMPUTER CORPORATION

Our Newest Data Base Management System

Introducing CONDOR SERIES 20/DBMS, the relational data base management system for users who want powerful performance at reasonable prices.

For the special introductory offer of $695, discover how easy it is to develop business or personal information systems with SERIES 20/DBMS.

- Create a Data Base in Minutes
- Full CRT Screen Management
- Use English-like commands. Host language not required.
- Computational, Statistical, and Sorting Capabilities

CONDOR SERIES 20/DBMS is compatible with many Z-80 microcomputers with at least 48K RAM running under CP/M® operating systems.

CP/M is a registered trademark of Digital Research, Inc.

CONDOR SERIES 20/DBMS

_____User's Manual ($35, plus tax) _____Additional information.
_____SERIES 20 package ($695, plus tax)
Please Send To:
Name _____ Position _____
Company _____ Address _____
City _____ State _____ ZIP _____
Phone ( ) _____ Computer _____ CRT _____

CONDOR COMPUTER CORPORATION
3989 Research Park Drive, P. O. Box 8318
Ann Arbor, Michigan 48107 (313) 769-3988
Dealer inquiries welcome. C 20-2

January 1981

January 7-9
The Fourteenth International Symposium on Minicomputers and Microcomputers, Hotel del Coronado, San Diego CA. The scope of the symposium will cover technology, hardware, software, engineering, languages, systems architecture, operating systems, numerical methods, computer networks, and other aspects of computing. Contact the Secretary, MIMI '81 San Diego, POB 2481, Anaheim CA 92804.

January 13-15
Communications Networks 1981, Albert Thomas Convention Center, Houston TX. This show will feature exhibits and seminars covering network policy and management for US and international users and carriers; network architecture, software, and hardware; new developments; information appliances; and more. This conference is aimed at communications professionals, carrier, service and

Circle 235 on inquiry card.

Circle 236 on inquiry card.

Circle 237 on inquiry card.

APPLE II Ⓐ TRS·80 Ⓣ

QUALITY DISK SOFTWARE

VISA master charge

☐ HOME FINANCE PAK I: Entire Series $49.95 ⒶⓉ

☐ BUDGET: The heart of a comprehensive home finance system. Allows user to define up to 20 budget items. Actual expense input can be by keyboard or by automatic reading of CHECKBOOK II files. Costs are automatically sorted and compared with budget. BUDGET produces both monthly actual/budget/variance report and a year-to-date by month summary of actual costs. Color graphics display of expenses. . . $24.95

☐ CHECKBOOK II: This extensive program keeps complete records of each check/deposit. Unique check entry system allows user to set up common check purpose and recipient categories. Upon entry you select from this pre-defined menue to minimize keying in a lot of data. Unique names can also be stored for completeness. Rapid access to check files. Check register display scrolls for ease of review. 40 column printout. Up to 100 checks per month storage. Files accessible by BUDGET program $19.95

☐ SAVINGS: Allows user to keep track of deposits/withdrawals for up to 10 savings accounts. Complete records shown via screen or 40 column printer. $14.95

☐ CREDIT CARD: Keep control of your cards with this program. Organizes, stores and displays purchases, payments and service charges. Screen or 40 column printer display. Up to 10 separate cards $14.95

☐ UNIVERSAL COMPUTING MACHINE: $39.95 ⒶⓉ

A user programmable computing system structured around a 20 row x 20 column table. User defines row and column names and equations forming a unique computing machine. Table elements can be multiplied, divided, subtracted or added to any other element. User can define repeated functions common to a row or column greatly simplifying table setup. Hundreds of unique computing machines can be defined, used, stored and recalled, with or without old data, for later use. Excellent for sales forecasts, engineering design analysis, budgets, inventory lists, income statements, production planning, project cost estimates-in short for any planning, analysis or reporting problem that can be solved with a table. Unique curser commands allow you to move to any element, change its value and immediately see the effect on other table values. Entire table can be printed by machine pages (user-defined 3-5 columns) on a 40 column printer.

☐ COLOR CALENDAR: $19.95 Ⓐ

HI-RES color graphics display of your personal calendar. Automatic multiple entry of repetitive events. Review at a glance important dates, appointments, anniversaries, birthdays, action dates, etc. over a 5 year period. Graphic calendar marks dates. Printer and screen display a summary report by month of your full text describing each day's action item or event. Ideal for anyone with a busy calendar.

☐ BUSINESS SOFTWARE: Entire Series $159.95 ⒶⓉ

☐ MICROACCOUNTANT: The ideal accounting system for the small business. Based on classic T-accounts and double-entry bookkeeping, this efficient program records and produces reports on account balances, general ledger journals, revenue and expenses. Screen or 40 column printer reports. Handles up to 1000 journal entries per month up to 300 accounts. Includes a short primer in Financial Accounting. . . . $49.95

☐ UNIVERSAL BUSINESS MACHINE: This program is designed to SIMPLIFY and SAVE TIME for the serious businessman who must periodically Analyze, Plan and Estimate. The program was created using our Universal Computing Machine and it is programmed to provide the following planning and forecasting tools.

CASH FLOW ANALYSIS — PROFORMA BALANCE SHEET — SOURCE AND USE OF FUNDS
PROFORMA PROFIT & LOSS — SALES FORECASTER — JOB COST ESTIMATOR

Price, including a copy of the Universal Computing Machine $89.95

☐ BUSINESS CHECK REGISTER AND BUDGET: A combination of our CHECKBOOK II and BUDGET programs expanded to include up to 50 budgetable items and up to 500 checks per month. Includes bank statement reconciliation and automatic check search (48K). $49.95

☐ ELECTRONICS SERIES: Entire Series $159.95 Ⓐ

☐ LOGIC SIMULATOR: SAVE TIME AND MONEY. Simulate your digital logic circuits before you build them. CMOS, TTL, or whatever, if it's digital logic, this program can handle it. The program is an interactive, menu driven, full-fledged logic simulator capable of simulating the bit-time by bit-time response of a logic network to user-specified input patterns. It will handle up to 1000 gates, including NANDS, NORS, INverters, FLIP-FLOPS, SHIFT REGISTERS, COUNTERS and user-defined MACROS. Up to 40 user-defined, random, or binary input patterns. Simulation results displayed on CRT or printer. Accepts network descriptions from keyboard or from LOGIC DESIGNER for simulation. $89.95

☐ LOGIC DESIGNER: Interactive HI-RES Graphics program for designing digital logic systems. A menu driven series of keyboard commands allows you to draw directly on the screen up to 15 different gate types, including 10 gate shape patterns supplied with the program and 5 reserved for user specification. Standard patterns supplied are NAND, NOR, INVERTER, EX-OR, T-FLOP, JK-FLOP, D-FLOP, RS-FLOP, 4 Bit COUNTER and N-BIT SHIFT REGISTER. User interconnects gates just as you would normally draw using line graphics commands. Network descriptions for LOGIC SIMULATOR generated simultaneously with the CRT diagram being drawn. $89.95

☐ MATHEMATICS SERIES: Entire Series $49.95 Ⓐ

☐ STATISTICAL ANALYSIS I: This menu driven program performs SIMPLE LINEAR REGRESSION analysis, determines the mean, standard deviation and plots the frequency distribution of user-supplied data sets. Printer, Disk, I/O and edit routines included (32K min.) $19.95

☐ NUMERICAL ANALYSIS: HI-RES 2-Dimensional plot of any function. Automatic scaling. At your option, the program will plot the function, plot the INTEGRAL, plot the DERIVATIVE, determine the ROOTS, find the MAXIMA and MINIMA and list the INTEGRAL VALUE. $19.95

☐ MATRIX: A general purpose, menu driven program for determining the INVERSE and DETERMINANT of any matrix, as well as the SOLUTION to any set of SIMULTANEOUS LINEAR EQUATIONS. Disk I/O for data save. Specify 55 eqn. set (48K) or 35 eqn. (32K) $19.95

☐ 3-D SURFACE PLOTTER: Explore the ELEGANCE and BEAUTY of MATHEMATICS by creating HI-RES PLOTS of 3-dimensional surfaces from any 3-variable equation. Disk save and recall routines for plots. Menu driven to vary surface parameters. Hidden line or transparent plotting $19.95

☐ ACTION ADVENTURE GAMES: Entire Series $29.95 Ⓐ

☐ RED BARON: Can you outfly the RED BARON? This fast action game simulates a machine-gun DOG FIGHT between your WORLD WAR I BI-PLANE and the baron's. You can LOOP, DIVE, BANK or CLIMB in any one of 8 directions - and so can the BARON. in HI-RES graphics $14.95

☐ BATTLE OF MIDWAY: You are in command of the U.S.S. HORNETS' DIVE-BOMBER squadron. Your targets are the Aircraft carriers, Akagi, Soryu and Kaga. You must fly your way through ZEROS and AA FIRE to make your DIVE-BOMB run. In HI-RES graphics $14.95

☐ SUB ATTACK: It's April, 1943. The enemy convoy is headed for the CORAL SEA. Your sub, the MORAY, has just sighted the CARRIERS and BATTLESHIPS. Easy pickings. But watch out for the DESTROYERS - they're fast and deadly. In HI-RES graphics $14.95

☐ FREE CATALOG - All programs are supplied on disk and run on Apple II w/Disk & Applesoft ROM Card & TRS-80 Level II and require 32K RAM unless otherwise noted. Detailed instructions included. Orders shipped within 3 days. Card users include card number. Add $1.50 postage and handling with each order. California residents add 6½% sales tax.

Make checks payable to:

SPECTRUM SOFTWARE


P.O. Box 2084 142 Carlow, Sunnyvale, CA 94087

For phone orders - 408-738-4387

DEALER INQUIRIES INVITED

DIGITAL COMPUTER CASSETTES

- Ideal for Apple, Pet or TR-S80 Users.
- Eight Special 50 Foot Cassettes.
- Unique Storage Album.

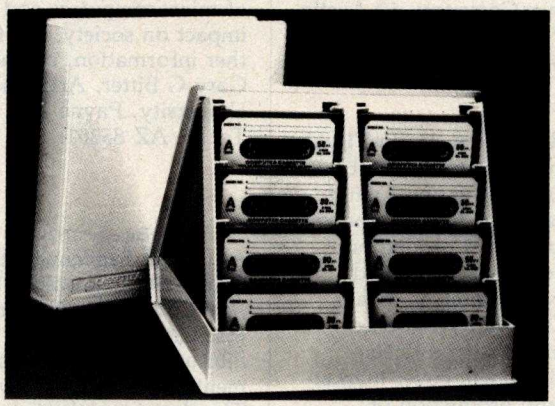

$9.95 each or 3 for $26.00

Extra cases - $4.95


No Sales Tax For Out Of State Customers
Price Includes Free Shipping In Continental U.S.

Dealer Inquiries Welcome

Sound Concepts
P.O. Box 299
Provo, Utah 84601

Call Collect
for Master Card
or Visa Orders
801-375-7333

LOW COST IMPACT PRINTER

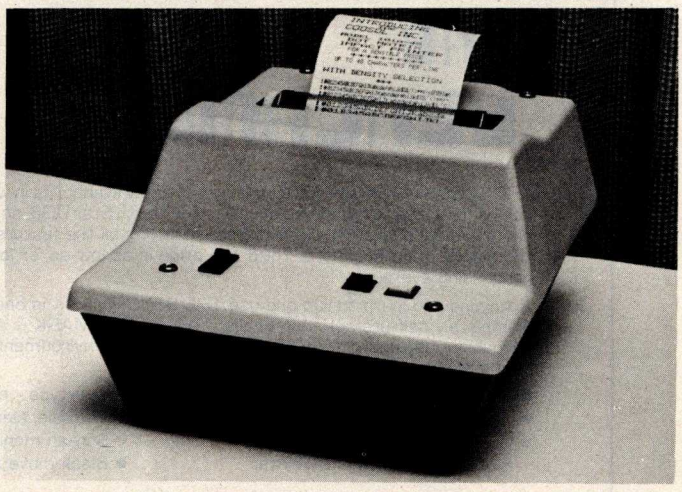

48 Column Impact Printer available in KIT form or ASSEMBLED and TESTED, ready to be connected to your computer. Primary features include: Microprocessor controlled and programmable with 32 system level software commands, 96 ASCII characters with upper and lower case, no eye straining print with 9 software selectable sizes from 5 x 7 to larger 10 x 7 and 10 x 14 character fonts, reverse font printing capability, standard parallel and serial interface, baudrate selectable from 110 to 9600 baud, plus many more functions at your command.

Prices for KITS are $295 (101A-48K) without enclosure and $325 (101A-48KE) with enclosure. KITS include all electronics, mechanical parts and detailed assembly instructions.

ASSEMBLED and TESTED Impact Printers—prices are: $325 (101A-48) excluding enclosure, $355 (101A-48E) with enclosure.

For further information, contact:

COOSOL, INC.
P.O. Box 743, Anaheim, Ca. 92805 Phone: (714) 545-2216
(7 days a week)

Circle 238 on inquiry card.

hardware vendors who are interested in combining voice, data, and message systems applications. Contact Communications Networks '81, c/o The Conference Company, 60 Austin St, Newton MA 02160, (617) 964-4550.

January 14-19

42nd National Audio-Visual Convention and Exhibit, Dallas Convention Center, Dallas TX. Over 300 manufacturers and producers of audio-visual, video and microcomputer hardware and software will be exhibiting their products. Seminars will cover marketing and production of audio-visual items. For more information, contact the National Audio-Visual Association, 3150 Spring St, Fairfax VA 22031, (703) 273-7200.

January 16-17

Microcomputer Conference, Arizona State University, Tempe AZ. The goal of this microcomputer conference is to introduce educators to the applications of computers in the classroom. The emphasis of the conference is to provide an awareness of microcomputers and their impact on society. For further information, contact Dr Gary G Bitter, Arizona State University, Payne 203, Tempe AZ 85281.

January 27-29

Advanced Semiconductor Equipment Exposition, San Jose Convention Center, San Jose CA. Over 100 exhibitors will feature equipment at this trade show. The show's emphasis is on new products and emerging technology in the semiconductor processing and production fields. Contact Cartlidge & Associates, 491 Macara Ave, Suite 1014, Sunnyvale CA 94086, (408) 245-6870.

January 28-31

The Third IMMM/Data Comm International Japan Exposition, Harumi Exposition Center, South Hall, Tokyo, Japan. Over 15,000 scientists, design engineers, technical managers, applications engineers, and other specialists are expected to attend this show. Internepcon Japan/Semiconductor International is held concurrently. A conference program will include talks on microcomputer-controlled data communications systems, peripheral interfacing, software management, and more. Contact Industrial and Scientific Conference Management Inc, 222 W Adams St, Chicago IL 60606, (312) 263-4866. ■

BYTE's Bugs

Correspondence on Correspondence

Thank you, BYTE, for running the enlarged, corrected oscilloscope photographs in BYTE's Bugs on page 182 of the June 1980 issue. BYTE readers may wish to label these pictures in order to be sure of their correspondence with the original photographs on page 66 of the article, "A Computer-Controlled Light Dimmer" (January 1980 BYTE). The picture labels should be matched as follows:

Original Article (January)	Pictures in BYTE's Bugs (June)
00	a
40	b
80	c
C0	d
FF	e

Thank you again for your time and concern in publishing the corrections in BYTE's Bugs.

John H Gibson
Department of Physics
Alma College
Alma MI 48801

Incorrect STOIC Price

An incorrect price was reported in John James's article "What is FORTH?" in the August 1980 BYTE. On page 134, middle column, Mr James reported that the language STOIC was available from the CP/M User's Group (1651 Third Ave, New York NY 10028) for $20. The membership fee of $4 has been replaced by a one-time catalog fee of $6, making the total $22, not $20 ($8 each for two floppy disks plus $6 for the catalog). Also, the above price is valid for the United States, Canada, and Mexico only. The price for all other countries is $12 per disk, making a total of $30 ($12 each for two floppy disks plus $6 for the catalog). The Group is filling orders that were received with insufficient funds, but they (and we at BYTE) request that the receivers of such orders pay the appropriate difference in price. ■

Introducing

THE BENCHMARK(tm) WORD PROCESSING SYSTEM

THE BENCHMARK software system sets new standards in word processing. First, it can be delivered to run on the CP/M or the North Star DOS, so there may be no need to buy a special operating system. Second, it has all the features of systems costing thousands of dollars more. Third, the price is as low as, or lower than, most word processing systems.

Anyone can learn to run and use THE BENCHMARK in one day of self training. Completely self-prompting in English. THE BENCHMARK is a full capability word processor, has been thoroughly tested in an office environment and proved to meet the needs of the most sophisticated user.

- Multi-operating system
- Changes terminal drivers
- Customized to utilize all the features of terminal & printer
- Overtype - erases, corrects
- Variable, electronic decimal tab
- Screen menus simplify operation
- Block move and get

ONLY $499 plus tax where applicable


THE BENCHMARK is distributed exclusively by R&B Computer Systems. Dealer inquiries are invited.

R&B Computer Systems™

1954 E. University
1-800-528-7385

Tempe, Arizona 85281
AZ-602-968-7101

THE BENCHMARK is a trademark of Metasoft Corporation



WE DELIVER!

Osborne Business Software

Before you buy the programs that your company is going to depend on for its accounting, ask the following questions:

Do I get the source code? (Don't settle for less. You cannot make the smallest change without it.)

Is it well documented? (The Osborne documentation is the best.)

Is it fully supported? (If not, why not? What are they afraid of?)

The Osborne system is the industry standard accounting package, with literally thousands of users. We offer an enhanced version of that package that will run on most systems without recompiling.

CRT INDEPENDENCE. The original programs were designed to run on a Hazeltine terminal. To use a different CRT, you had to modify and test two modules — and recompile every program! With the Vandata package, you simply pick your CRT from a menu and run.

FILE/DRIVE MAP. The original package had all data files on the same drive as the programs. Ours allows you to dynamically specify the drive assigned to each file. In fact, you can change the drive assignments whenever you wish, to accommodate expanded file sizes or new hardware — all without recompiling!

INTEGRATION. The original AR and AP systems had to be changed and recompiled to feed journal entries to GL. Our installation program eliminates this hassle. It simply asks you if you want the systems integrated, and what your special account numbers are.

SPEED. The original programs used a binary search to access the GL account file. We use an enhanced technique that greatly cuts down on disk accesses, thus speeding up account lookups significantly in the GL, AR and AP systems.

BUGS. We have corrected a number of bugs in the original programs. If you find a bug in our programs, we'll fix it — and send you a $20 reward! Our users are sent bug fixes in source form.

MORE! We have made many minor enhancements, and fixed many minor problems. We are committed to the ongoing support of our package. Vandata has been an independent software supplier for over seven years. Quality and support are our way of doing business.

General Ledger with Cash Journal	$95
Accounts Receivable	$95
Accounts Payable	$95
Payroll with Cost Accounting	$95
• **All Four Packages (GL, AR, AP, PR)**	**$295**
Magic Wand (Super Word Processor!!)	$345
Pearl Level III (best prog. tool available)	$645
CBASIC-2	$110
TRS-80® MOD II CP/M® 2.2 (Pickles & Trout)	$185
H89/Z89 CP/M® 2.2 (Magnolia inc. h/w mod)	$295


Formats: Std. 8", 5" NorthStar DD, TRS-80 MOD II tm, H89/Z89. Manuals for GL, AR/AP, and PR are not included in price — add $20 per manual desired (AR/AP are in one manual). CP/M® and CBASIC-2 required to run accounting software. Users must sign licensing agreement. *Dealer inquiries invited.*

To order call: **(206) 542-8370**

or write: **VANDATA**
17541 Stone Avenue North
Seattle, WA 98133

VISA/MC Welcome — CP/M® is a registered trademark of Digital Research.
TRS-80® is a registered trademark of Radio Shack, Inc.

6502 MICRO MICROCOMPUTER




This JBE micro-microcomputer has the following:
- 1024 bytes of RAM (two 2114s)
- 2048 bytes of EPROM (2716)
- Uses one 6522 via (documentation incl.)
  - 2 8-bit bidirectional I/O ports
  - 2 16-bit programmable timer/counter
  - Serial data port
  - Latched output and input with handshaking logic
  - TTL and CMOS compatible

The 6502 microprocessor is particularly suited for control functions such as temperature control burglar alarm, electrical wheel chair, lights, etc. This micro-micro interfaces with the JBE Solid State Switch and A-D and D-A converter and uses JBE 5V power supply. 2716 EPROM is available separately. A 50 pin connector is included.

80-153 ASSM. **$110.95** Kit **$89.95** Bare Board **$24.95**


DIMMER CONTROL



The JBE Dimmer Control has 4 channels, 256 brightness levels on-board power supply and four 8-bit parallel input ports (not latched). This board interfaces with JBE Solid State Switch and Apple II Parallel Interface Card (documentation included).

80-146 ASSM. **$89.95**
KIT **$79.95**
BARE BOARD **$25.95**

APPLE II DISPLAY BOARD




This handy little board is ideal for teaching and troubleshooting. It has a run-stop single step switch which makes identification of shorted lines between address or data-bits easy & shows single step for teaching computer logic. The display board has 16 address LEDs, 8 data LEDs and 1 RDY LED. All lines are buffered.

80-144 ASSM. **$49.95**
KIT **$42.95**
BARE BOARD **$25.95**

JOHN BELL ENGINEERING

ALL PRODUCTS ARE AVAILABLE FROM: **JOHN BELL ENGINEERING**
P.O. BOX 338 • REDWOOD CITY, CA 94064 • (415) 367-1137
ADD 6% SALES TAX IN CALIFORNIA. FOR ORDERS OUTSIDE THE U.S.A., ADD 5% FOR SHIPPING AND HANDLING.
* For complete product line, see John Bell Engineering full page ad in ***Kilobaud***
* Write for our new catalog

Kill Surges Like Lightning!

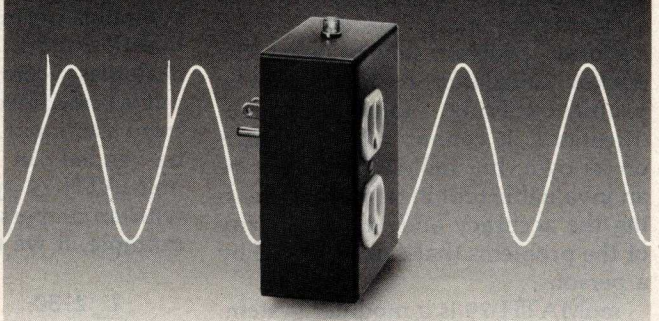

Surge Sentry 120 works in parallel with the power line to shunt destructive power surges in less than 1 nanosecond! Triggers at 10% above the nominal peak voltage. Plugs into any standard 120-volt outlet for immediate protection.

Ideal for small computers, communications, medical, and other sensitive electronic equipment. Suggested retail price $89.50. OEM model also available. Call or write:

R&K Enterprises
643 South 6th Street, San Jose, CA 95112
(408) 288-5565.

Dealer inquiries invited.

The muSIMP/muMATH-79 Symbolic Math System

Gregg Williams
Editor

Computers are very literal minded: ask one to add 1/2 and 1/3 and it will probably give you 0.833333 or some close approximation. Ask for 40! (ie: 40 factorial) and you will get an answer like 8.1592E47, if you receive a reply at all. But what if you wanted the answer 5/6 for the first problem and an exact answer to the second problem, all forty-eight digits of it? Computers express everything in numbers, not symbols: that's the problem.

A software package called muMATH-79, created by the Soft Warehouse of Honolulu, Hawaii, does just what you want and more. The muMATH-79 package, billed as a *symbolic math system*, is to algebraic problem solving what the pocket calculator is to arithmetic problem solving. Like a pocket calculator, it cannot solve problems on its own, but muMATH-79 can be an invaluable tool in terms of increasing the accuracy and the complexity of the problems that can be solved by a person.

muMATH-79 is a modular system. It can be used for any one or a combination of the following: 611-digit arithmetic; matrix manipulation; algebraic manipulation and equation solving; logarithmic and trigonometric manipulation; integration and differentiation.

Arithmetic and Algebra

muMATH-79 manipulates everything as a string of symbols, so it's no surprise that numbers are stored as strings of digits, with a given number being up to 611 digits long. Given this situation, muMATH-79 has defined addition, subtraction, multiplication, division, and integral exponentiation as operations that work on two strings of numbers to give a third string as a result.

Matrix operations in muMATH-79 are fast as well as exact.

When muMATH-79 is running, the computer prompts user input with a question mark and a space. (In our examples, computer-generated output is underlined here to distinguish it from user input.) All commands must be ended in a semicolon, and muMATH-79 precedes its answer with an ampersand and a space. For example, if we type in:

```
? 2↑50;
```

muMATH-79 replies almost instantly with:

```
@ 1125899906842624
```

Similarly, a request for 40 factorial gets an immediate reply:

```
? 40!;
@ 815915283247897734345611269596115894272000000000
```

We can assign strings (ie: numbers or symbolic expressions) to variable names using a colon:

```
? C1:2↑50;
@ 1125899906842624
? C2:C1−1;
@ 1125899906842623
```

Also, we can change the radix used to accept and display numbers. For example, to change to binary (also called radix 2 or base 2), we say:

```
? RADIX(2);
@ 1010
```

and muMATH-79 replies that its base was base 10 (since it is now in base 2, it prints 10 in binary: binary 1010 = decimal 10). To check that we are in base 2:

```
? C1;
@ 10000000000
```

Commercial Mailer


For your APPLE/CORVUS Computer System:

Store up to

30,000 names per mailing list!

with an

unlimited number of lists!

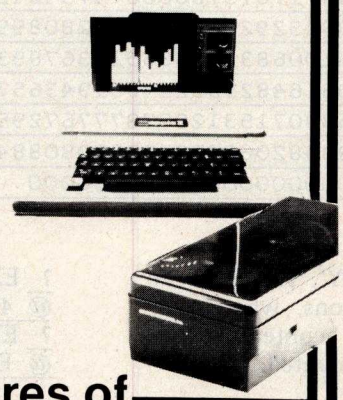

Unlimited potential is available now with this new mailing list program designed for commercial mailers, and written in Applesoft. **With 6 lines per record, fully adaptable to your format, up to 30,000 names can be maintained on each list with no limit on the number of lists.**

"Apple" and "Corvus" are registered trademarks of Apple Computer Inc. and Corvus Systems.

Features of This Revolutionary Program:

- creates list
- selects list
- displays list
- reports list
- maintains list by zip code and alphabetical order
- finds entry
- browse thru entry
- change entry
- add to entry
- deletes entry
- search entries
- utility/code field

PRODUCES 1UP, 2UP, 3UP, 4UP CHESHIRE OR PRESSURE SENSITIVE LABELS

Fully Prompting • Easy To Run

Requirements:

Requires 48K Apple, 80 or 132 column printer, Corvus 11AP Hard Disk. Optional: Corvus Mirror, Corvus Constellation.

Complete Software

program with detailed user manual. Add $3. for shipping. **$250.**

All orders prepaid or C.O.D. N.J. firms add 5% sales tax.


STONEHENGE COMPUTER CO.
89 Summit Avenue Summit, N.J. 07901

or call (201) 277-1020 for further information

DEALER INQUIRIES INVITED

There's never been a better time to buy an Apple® II.

48K APPLE II OR PLUS ONLY **$1095.**



Visit our newly expanded showroom and see one of the original Apple Is on display.

apple computer
Authorized Dealer

FARNSWORTH COMPUTER CENTER
1891 N. FARNSWORTH AVE.
(At the East-West Tollway)
AURORA, IL. 60505
(312) 851-3888
Weekdays 10-8; Sat. 10-5

MAIL ORDER DISCOUNTS

apple computer
Sales and Service

APPLE II 48K

$1,059



ACCESSORIES

DISK II DRIVE & CONTROLLER	480	MICROSOFT Z-80 SOFTCARD SYSTEM	315
DISK II DRIVE ONLY	420	VIDEX 80 COLUMN BOARD W/GRAPHICS AND SWITCH	350
INTEGER BASIC FIRMWARE CARD	149	DC HAYES MICROMODEM II	330
APPLESOFT II FIRMWARE CARD	149	SILENTYPE PRINTER W/INT. CARD	510
M&R SUR-R-MOD RF MODULATOR	25	LANGUAGE SYSTEM W/PASCAL	420
CENTRONICS PRINTER INTERFACE CARD	185	GRAPHICS TABLET	650
HIGH-SPEED SERIAL INTERFACE CARD	145	ALF MUSIC SYNTHESIZER	235

SOFTWARE

APPLE FORTRAN	165	THE CONTROLLER BUSINESS SYSTEM	515
DOS 3.3	49	THE CASHIER RETAIL MANAGEMENT	199
APPLE DOS TOOL KIT	65	VISICALC	120
APPLEPLOT GRAPH & PLOT SYSTEM	60	APPLEWRITER TEST EDITOR	65

- WE WILL TRY TO BEAT ANY ADVERTISED PRICE
- WE PERFORM APPLE WARRANTY REPAIR

computer age, inc.
Authorized Apple Dealer & Service Center
4688 CONVOY ST., SUITE 105
SAN DIEGO, CA 92111
(714) 565-4042

TO ORDER:
Please phone using VISA and Master Card. Or send cashier's check, money order or personal check (allow 14 business days to clear). VISA and MC credit card service add 2%. Shipping, handling and insurance add 3%. California residents add 6% sales tax.
ORDER HOURS:
Monday thru Saturday 9-5 PST.

Listing 1: *Extended-precision arithmetic in muMATH-79. As shown in the first two examples, muMATH-79 does not convert fractions, but rather reduces them to their lowest terms. As you can see from the 493-digit answer to 250! (250 factorial), muMATH-79 does all its arithmetic exactly. In this and all other listings, underlining denotes computer output.*

```
? 4/20;

@ 1 / 5


? 352/283072;

@ 11 / 8846


? 250!;

@ 32328562609091077323208145520243684709948437176737806667479424271128237
74755511120948881791537102819945092850735318943292673093171280899082279103
02790712819216765272401892647332180411862610068329253651336789390895699357
13530175040513178760077247933065402339006164825552248819436572586057399222
64125483298220484913772177665064127685880715312897877767295191399084437747
87025891729732551502832417873206581884820624785826598088488255488000000000
00000000000000000000000000000000000000000000000000000000000000000000000000
```

exceeds the capacity of the system, muMATH-79 replies with the word FALSE:

```
? 300!;
@ FALSE
```

muMATH-79 also manipulates symbolic expressions (depending on the values of its control variables, described later). For example:

```
? 5*X-3*Y↑2+8*X-4*Y↑2
@ 13*X - 7*Y↑2
```

Equations in muMATH-79 are often hard to read. It helps to write them out using pencil and paper; the above was $5X-3Y^2+8X-4Y^2$, which simplified to $13X-7Y^2$. Variables can be used in expressions, where they add their symbolic content to the expression being evaluated:

```
? EXPR1:B+4;
@ 4 + B
? EXPR2:EXPR1+C+2*B;
@ 4 + 3*B + C
```

A variable name is called *bound* if it has a value and *unbound* if it does not. For example, the variable EXPR1, above, is bound because it has the value B+4. There are times, however, when we want a variable to simply be itself. We can change a variable from bound to unbound as follows (using the example of EXPR1):

```
? EXPR1;
@ 4 + B    (EXPR1 is bound)
? EXPR1:'EXPR1
@ EXPR1    (EXPR1 is now
                unbound)
```

Equation Solving

In addition, some equations can be solved. For example, to solve

$$X^3+2X^2-63X=0:$$

```
? SOLVE(X↑3+2*X↑
        2-63*X==0,X);
@ {X = 7,
   X = -9,
   X = 0}
```

(muMATH-79 uses the double equal


UCSD Pascal* for the INTERTEC SUPERBRAIN™

Certified by Softech Microsystems

Our package includes:

- operating system
- compiler
- screen editor
- filer
- library
- Z80 assembler
- user manual
- Jensen & Wirth Pascal Reference Manual
- Bowles' Beginners Guide to UCSD Pascal

$400 complete

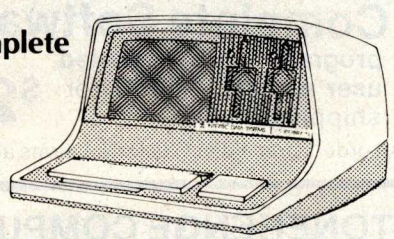

NOESIS COMPUTING COMPANY

615 Third Street, San Francisco, CA 94107

Telephone: (415) 495-7440

Master Charge Accepted

*Trademark of the Regents of the University of California

™Trademark of Intertec Data Systems

Circle 245 on inquiry card.

Diagnostics I

for CP/M* & TRSDOS#



Someday your computer is going to break; even the most reliable computer systems "go down". Often, finding exactly what is wrong can account for the most time consuming part of repairing the system, and the longer the system is down, the more money you lose.

DIAGNOSTICS I is a complete program package designed to check every major area of your computer, detect errors, and find the cause of most common computer malfunctions, often before they become serious. For years, large installations have run daily or weekly diagnostic routines as a part of normal system maintenance and check-out procedures.

DIAGNOSTICS I is designed to provide that kind of performance testing for 8080/Z80 micro computers.

DIAGNOSTICS I will really put your system through its paces. Each test is exhaustive and thorough. The tests include:

- Memory Test
- CPU Test (8080/8085/Z80)
- Printer Test
- Disk Test
- CRT Test

To our knowledge, this is the first CPU test available for 8080/Z80 CPU's. Many times transient problems, usually blamed on bad memory, are really CPU errors.

A good set of diagnostics is an indispensable addition to your program library even if your system is working fine. Hours have been wasted trying to track down a "program bug" when actually hardware was to blame!

DIAGNOSTICS I also allows you to be confident of your system. This can be critical when file merges or sorts and backups are involved. You want to be as sure of your computer as possible during these critical times. Running DIAGNOSTICS I prior to these and other important functions helps to insure that your system is operating at peak performance.

DIAGNOSTICS I is supplied on discette with a complete users manual.

DIAGNOSTICS I: $60.00 Manual only: $15.00

Requires: 24K CP/M; 16K disc for TRS-80

formats: CP/M 8" SOFT SECTORED, NORTHSTAR CP/M AND TRS-80 DOS

master charge VISA*


All Orders and General Information:
SUPERSOFT ASSOCIATES
P.O. BOX 1628
CHAMPAIGN, IL 61820
(217) 359-2112

Technical Hot Line: (217) 359-2691
(answered only when technician is available)

*CP/M REGISTERED TRADEMARK DIGITAL RESEARCH
#TRSDOS, TRS-80 TRADEMARKS TANDY CORP

Circle 246 on inquiry card.

FULL-VIEW 80™ by *Bit 3 COMPUTER CORPORATION*



DESIGNED FOR THE APPLE II®

80 X 24 DISPLAY CARD

Permits selection of 80 column or Apple 40 column/graphics on a single monitor via keyboard or program control • Available character fonts include 7x9, 5x7, or EROM • 2K firmware on card • Lowest power requirement of any 80x24 card on the market • User definable character sets with the optional EROM Adaptor and a 2716 or 2732 (255 characters!) EROM • 7 keyboard function keys with pressure sensitive adhesive label provides HOME, HOME & CLEAR, CLEAR TO END OF LINE, CLEAR TO END OF SCREEN, CATALOG, LOAD and RUN • Works with Apple II, Apple II Plus, Apple Pascal, Z-80 Softcard*, and D.C. Hayes Micromodem ™ • Compatible with all Apple II peripheral cards • Fast scroll--both scroll up and scroll down • Full keyboard editing • 127 upper/lower case characters • Individually selectable inverse or normal characters • Real time 1/60 second nonmaskable interrupt clock can be software enabled to permit timing of programs in background mode • READ screen capability • Light-pen connector and light pen firmware support • XY cursor positioning via GOTO X,Y command • Blank screen command to suppress video • Tab • 50/60 Hz. • 80x24 display memory is contained on card • Keyboard Shift-Lock identified by blinking cursor. Un-shifted by non-blinking cursor.

VISA

Apple II, Z-80 Softcard, D.C. Hayes Micromodem registered trademarks of Apple Computer, Inc., Microsoft Consumer Products and D.C. Hayes Associates, Inc. resp.

master charge

List Prices: 5x7 or 7x9 $395.00
Manual only $15.00
See your Apple Dealer or contact:


Bit 3 COMPUTER CORPORATION
1890 Huron St. • St. Paul, MN 55113 • (612) 926-6997

Circle 247 on inquiry card.

CFR Associates EXCLUSIVE!

SURPLUS COMPUTER BARGAINS

8 INCH FLOPPY DRIVES



Used, removed from systems. Mfd. by MPI Division of Control Data. These are *the* CDC floppy! Includes schematics & I/O data. Sold 'As-Is' but *complete and whole!* An incredible BARGAIN, easy to interface with most commercial controllers. Features "hard" sectoring.

Special Price ..... **Only $229.00ea.**
Buy 3 and SAVE BIG!! ..... **3/$599.00**
Plus Shipping



CASE STYLE MAY DIFFER

DAISY TERMINALS featuring the DIABLO HyType Daisy Printer.

This exciting terminal features: RS232C ASCII, 110-1200 BAUD, KSR operation plus fantastic *PLOTTER* mode with bi-directional horiz. & vert'l movement, 1/60"H & 1/48"V increments. 15" platen, prints at 10, 15 & 30 cps! Uses plastic printwheel and has many more exciting features. Includes operator's manual & schematics. Used & refurbed.

Now Only **$1499.00**
Add $30.00 for Shipping Crate. Pay Shipping On Delivery

* SELECTRIC Typewriter Terminals



USED, off-lease. Features IBM Selectric Printer RS232 I/O. Takes BCD code type elements. Whole and complete. "AS-IS" (may need some adjustments). *SEE OUR OCT. 1980 ADVERTISEMENT* in this magazine. 15" carriage, type ball included. 110 VAC includes power supply, I/O and printer circuits and more.

Only **$469.00**
Add $18.00 for Shipping Crate. Pay Shipping On Delivery
Maintenance Manuals Available... **$25.00**

2/$750

*IBM Trademark

GET YOUR COPY OF OUR LATEST FLYER!
Circle the Bingo Card Number or Send a 1st Class Stamp for a Free Copy.

CFR ASSOCIATES, INC.
18 Granite Street
Haverhill, Mass. 01830

617-372-8536
Phone Orders Welcome

master charge VISA

When You Have To Face A Deadline



Communication Arts, Huntington Beach, CA

Arm Yourself With Pascal/MT+®

From

MT Micro SYSTEMS

VISA®

master charge


1562 Kings Cross Drive
Cardiff, California 92007 (714) 753-4856

We ship on 8" single density and 5-1/4" North Star single density.
Other formats available. Ask us.

CP/M is a registered trademark of Digital Research MP/M is a trademark of Digital Research Pascal/MT+ is a registered trademark of MT Micro Systems

Circle 248 on inquiry card.

MT MicroSYSTEMS SOFTWARE ARSENAL:

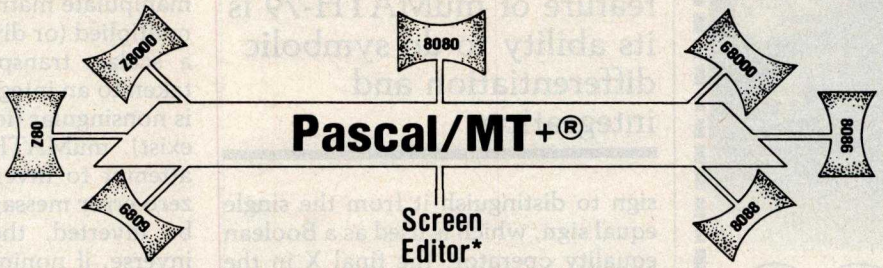

*Contact us for the exciting news about this leap forward in state of the art technology.

Pascal/MT+® provides you with the power to meet your deadlines head-on! Compiling directly to native code without slowing down to generate P-code or assembly language, **Pascal/MT+®** generates ROMable, optimized native code and gives you the flexibility of modular compilation; and it does so at speeds up to 2000 lines per minute while the *others* are, at best, *one third* as fast! Even when you're *not* facing a deadline, **Pascal/MT+®** never wastes your time! Nobody likes to wait for a computer. The **Pascal/MT+®** won't keep you waiting! Your software written in **Pascal/MT+®** is totally portable to most 8 and 16 bit processors. The **Pascal/MT+®** system provides you with a powerful debugging tool. With **Pascal/MT+®** you *do* have an effective weapon against monstrous deadlines.

Pascal is the most popular programming language in use today. You can use **Pascal/MT+®** to replace assembly language in your ROM based applications, BASIC and COBOL in your business applications, FORTRAN in your scientific applications, or interpreted Pascal in all of your applications. Because Pascal programs are easy to write, read, and maintain; and because the **Pascal/MT+®** system contains all of the features you need for your applications, you can get your job done *on time!* In fact, you may never need assembly language or any other high level language again. **Pascal/MT+®** has the speed, extensions, and portability to stock your software arsenal for years to come!!!

ISO STANDARD Pascal

Pascal/MT+® supports the ISO Standard. We send the results of our compiler's performance on the Validation Suite. Also, for portability the MT+ compiler can warn you when you are using non-standard extensions.

Modular Compilation

Pascal/MT+® generates the same industry standard relocatable code used in FORTRAN and PL/I. Both Pascal and assembly language modules may be separately compiled and then combined to produce a final program. With modular compilation available, the run time overhead is as small as 256 bytes and is typically 1200 bytes.

Native Code Generation

Pascal/MT+® native code is faster than interpreted Pascal and other native code Pascals in benchmark test programs. Optimization steps taken during compilation perform such enhancements as removing redundant PUSH/POP sequences and using single increment and decrement instructions when adding or subtracting small literal numbers. In addition, our disassembler interleaves your Pascal source code and symbolic assembly code to help you write more efficient programs.

Extras

- Predeclared arrays INP and OUT directly access I/O ports.
- INLINE instruction for inserting assembly language between the Pascal statements. A built-in mini assembler translates the instructions at compile time. Constant tables may be generated using the inline facility.
- ABSOLUTE assembly language procedure declarations for using pre-assembled routines.
- INTERRUPT procedures.
- CHAINING for transfering control from one program to another.
- ELSE clause on the case statement.
- REDIRECTED I/O facilities allow user written character level I/O drivers to be called via READ and WRITE statements.
- HEX literal numbers are supported.
- Built in procedures/functions:
  - —bit test, clear, set.
  - —byte swap.
  - —return hi or lo byte.
  - —Shift left and right.
  - —Return the address of a data item or routine.
  - —Return the size of a data item.
  - —Enable, disable interrupts.
  - —All standard file I/O plus random read and write to files.
- Include files supported.
- Source code for run-time package included.
- Business (18 digit) arithmetic.
- Scientific (6.5 digit) arithmetic.
- AMD 9511 hardware support.
- Transcendental functions.
- Full string capability (UCSD compatible).

Symbolic Debugger

Our symbolic debugger is optionally linked into the final program. If you're tired of feeling like you're in the dark when using a higher level language, the **Pascal/MT+®** debugger lights up the darkness. The debugger traces one or more lines of Pascal code or executes the program until a line number or symbolic breakpoint is reached. To follow program flow the name of each procedure and function entered is displayed by the debugger. The contents of simple and complex variables may be displayed by name. The debugger may be used in a ROM environment so that program flow and variable contents are visible.

Distribution disk contains

- BCD compiler configured for your target machine.
- Floating point compiler configured for your target machine.
- Linker.
- Interactive Symbolic Debugger.
- Run time package in source and object form.
- Pascal library and utility routines.
- Manual containing an Applications Guide and a Language Guide.
- Sample programs.
- Librarian program to manage libraries of modules.

System Requirements

- Operating System: CP/M® (or equivalent such as CDOS, IMDOS, etc.) MP/M™. Intel ISIS II, Heath HDOS, and PDP-11 systems to be available soon.
- Memory requirements: 48K minimum.
- Host Machines: 8080 or Z80.
- Target Machines: 8080/Z80, 68000, Z8000, 8086/8088, 6809.
- Resident compilers for all processors will be forthcoming as operating systems become available.

MT MicroSYSTEMS has a very reasonable, graduated, one time royalty arrangement for free standing software generated by **Pascal/MT+®**.

Ordering

8 bit processor target machines:
8080/Z80, 6809 ..... $250.00 each

16 bit processor target machines:
68000, Z8000, 8086/8088 ..... $500.00 each

User's guide alone
(refundable with system purchase): $30.00

Contact us for information about our automatic update service.

Note: Not all 16-bit CPU code generators are available at this time; contact us for information before ordering.

OEM and Dealer inquiries invited. **Circle 248 on inquiry card.**

Circle 249 on inquiry card.



FREE

WORD PROCESSOR
and
REPORT WRITER
when you buy this
CADO COMPUTER!

Now . . . own a *complete* CADO business computer *and* word processor for about the cost of IBM's computer-only 5120. It's the only low cost system that's multi-tasking: you can actually enter your payables or receivables at the same time you print perfect letters or documents.

CADO is the perfect way to keep track of things, too: personnel, sales, purchase orders . . . everything. And only CADO has JUST ASK II—the simple, programmer-less English language inquiry system. It's free, too. JUST ASK II works with Word Processing to automatically insert names and facts in your standard letters. And CADO has an application package just for you.

Get all the facts on the only computer with *free* word processor and report writer . . . from the world's fastest growing computer company . . . sold and serviced in over 150 CADO offices worldwide.

Send in the coupon NOW!

CADO SYSTEMS
CADO Systems Corporation
2771 Toledo Street • Torrance, CA 90503
(213) 320-9660 B11
Please rush me more information on the CADO System 20/22.

NAME
TITLE
COMPANY
ADDRESS
CITY STATE ZIP

The most impressive feature of muMATH-79 is its ability to do symbolic differentiation and integration.

sign to distinguish it from the single equal sign, which is used as a Boolean equality operator; the final X in the SOLVE command tells muMATH-79 to solve for the variable X.)

It is also aware of imaginary and complex numbers and uses the variable #I to represent the imaginary number *i*:

```
? SOLVE(X↑2+1==0,X);
@ {X = -#I,
   X = #I}
```

However, muMATH-79 is not intelligent; it cannot solve equations of order 3 or higher. (The example with the X^3 polynomial is seen by muMATH-79 as being of order 2, with a zero factor added.) Factoring is hard even for people, but muMATH-79 can aid you in factoring a higher-order polynomial.

Trigonometric and Logarithmic Manipulation

With the addition of these packages to the muMATH-79 system, the user can manipulate logarithmic and trigonometric expressions. Manipulation of these expressions varies with the values of certain control variables.

For example, if the trigonometric expansion variable TRGEXPD is 0:

```
? SIN(5*Y);
@ SIN(5*Y)
```

But if TRGEXPD is −6 (denoting expansion of multiple-angle sine and cosine functions):

```
? SIN(5*Y);
@ -12*COS(Y)↑2*SIN(Y)
  + 16*COS(Y)↑4*SIN(Y)
  + SIN(Y)
```

The functions available are LN (logarithm to the base *e*), LOG (logarithms to other bases), SIN, COS, TAN, COT, SEC, and CSC. And muMATH-79 uses the variable #E (for *e*) and #PI (for π).

Matrix Manipulations

The math system can also manipulate matrices. Matrices can be multiplied (or divided) by a matrix or a scalar, transposed, inverted, and taken to an integer power. If a matrix is nonsingular (ie: its inverse does not exist), muMATH-79 responds to an attempt to invert it with divide-by-zero error messages. If the matrix can be inverted, the coefficients of its inverse, if nonintegral, are expressed as fractions—that is, the inverse is algebraically exact. For an example of this, see listing 2.

Matrix operations are fast as well as exact. The inversion of matrix H in listing 2 took 5 seconds, and the inversion of a 5-by-5 matrix took 48 seconds. Since matrix entries are symbolic, the entries can be scalars or matrices. This allows the formation of complex data structures that can be manipulated by muMATH-79.

Differentiation and Integration

The most impressive feature of muMATH-79 is its ability to do symbolic differentiation and integration. For example, if we differentiate $1/X^3$ with respect to X, we get $-3X^{-4}$. muMATH-79 accomplishes the task as follows:

```
? DIF(1/X↑3,X);
@ -3 / X↑4
```

Listing 2: *Matrix inversion and multiplication in muMATH-79. Listing 2a shows the creation of the 2 by 2 matrix H. Listing 2b shows the creation of the inverse of H, HINV. Listing 2c shows the multiplication of two compatible matrices using a period (.) as the muMATH-79 matrix multiplication operator.*

(2a)

```
? H:{[380,-115/2],[17,109]};

@ {[380, -115/2],
   [17, 109]}
```

(2b)

```
? HINV:H^-1;

@ {[218/84795, 23/16959],
   [-34/84795, 152/16959]}
```

(2c)

```
? H.HINV;


@ {[1, 0],
   [0, 1]}
```

Circle 250 on inquiry card.

Circle 251 on inquiry card.

DIGIAC MAPS 1000

MP/M'S HARDWARE PARTNER



The Digiac MAPS-1000 MP/M* Universal Support Module has been designed to meet the total demands required by Digital Research's MP/M multi-user, multi-tasking operating system. All input/output, interrupt generation for task switching, and disk bootstrapping are resident functions on the MAPS-1000.

***The MAPS-1000 has been designed with all the following powerful features:**

• Four (4) independent RS-232C Serial Communication channels • One 8 bit TTL parallel port • On-board phantom controlled disk boot prom/monitor • Power on jump capability • Crystal controlled MP/M interrupt generation Logic • On board extended memory bank switching Logic

* MAPS-1000 fully assembled and tested introductory price. . . .$375.00

DIGIAC CORPORATION
175 Engineers Road
Smithtown, New York 11787
Phone (516) 273-8600
MP/M is a trademark of the Digital Research Corporation

DIGIAC CORPORATION

HEATH H9* OWNERS

UPGRADE your H9* for a fraction of the cost of a new terminal with these features.

FLICKER FREE $69.95 KIT $79.95 ASSEMBLED

If Columbus would have had to wait for his H9 operating at 600 baud, he might not have discouvered America. At last your computer can communicate with your H9 eight times faster (4800 baud) without that annoying refresh interrupt that causes the screen to flash at rates greater than 600 baud. Faster listings. Faster program execution. Eight times faster.

CURSOR CONTROL $29.95 KIT $34.95 ASSEMBLED

Why limit your output to consecutive lines of your terminal? CURSOR CONTROL allows your computer to move the cursor anywhere on the screen. Add that professional touch to your displays by utilizing masking techniques. Functions included are; left, right, up, down, left and right 20 spaces, home and erase page.

GRAFIX $59.95 KIT $69.95 ASSEMBLED

Open a whole new world to your output. The graphical display capabilities of GRAFIX allow you to create displays never before possible on the H9.

LOWER CASE ENTRY $28.88 ASSEMBLED

Now you can enter lower case characters from the keyboard. A Shift Lock key allows the keyboard to operate as the standard H9 keyboard or to generate upper and lower case depending upon the Shift key as per a normal typewriter.

LOWER CASE DISPLAY $34.77 ASSEMBLED

Lower case capabilities greatly improve readability on terminals modified for 24 lines.

KEY CAPS $12.50 SET 4 ARROWS $1.00

These quality contour key caps have molded-in alphanumerics. For that professional feel.

Full Six Month Warranty — 24 Line Compatible

NORTHWEST COMPUTER SERVICES, INC.
8503 N.E. 30th Ave.
Vancouver, WA 98665
(206) 573-8381

*H9 is a registered trademark of Heath Co. MASTER CARD and VISA welcome.




The Ultimate Application Development System

Our **Selector-IV**™ data base management system will let your microcomputer operate with the flexibility available (up to now) only on larger systems. You can create, maintain and report on files limited in size only by your *CP/M™ compatible operating system or disk storage capacity.

The basis of the power of **Selector-IV**™ is our unique method of cross-indexing the information in your files. You can immediately recall records by the contents of any piece of information required – from account numbers to ZIP codes to the date of your last audit. You can update records, individually or all at once. You can create new, uniquely, selected sub-files from existing ones (in the same or a different format), and perform computations in the process. You can define procedures to generate computed invoices, personalized letters, or gummed labels with the information coming from several files at once, and invoke them whenever needed. You can add new items to a record definition and change or delete them at will.

We've come a long way since we released the first information management system in microcomputers. We've built screen editing functions into the system which make operating the system as convenient as possible. We've had **Selector-IV**'s™ documentation produced by our experts emphasizing its use for the novice, the applications developer, as well as, the retailer. Our applications specialists can provide you with a "turnkey" **Selector-IV**™ system customized for virtually any requirement.

With **Selector-IV**™ and a good word processor program, chances are you won't need any other software. Look for **Selector-IV**™ at your local computer retailer, or call:



MICRO•AP, INC.
9807 Davona Dr., San Ramon, CA 94583
(415) 828-6697 **MICRO•AP**

***CP/M** is a registered trademark of Digital Research.

Circle 252 on inquiry card.



BET, YOU DIDN'T KNOW!

*Pat's Pending

OAE'S new **PP-2708/16** PROM Programmer is the *only* programmer with all these features:

- Converts a PROM memory socket to a table top programmer: No complex interfacing to wire—just plug it into a 2708 memory socket*
- A short subroutine sends data over the address lines to program the PROM
- Programs 2 PROMS for less than the cost of a personality module. (2708s and TMS 2716s)
- Connect 2 or more in parallel — super for production programming
- Complete with DC to DC switching invertor and 10 turn cermet trimmers (for precision pulse width and amplitude alignment)
- All packaged in a handsome aluminum case

PP-2708/16. . . A & T $349.95

PP-2716 (Programs Intel's 2716. . . . . A & T $324.95

OAE

Oliver Advanced Engineering, Inc.
676 West Wilson Avenue
Glendale, Calif. 91203
(213) 240-0080

Circle 253 on inquiry card.

CROSS-ASSEMBLERS

WRITTEN IN ANSI FORTRAN IV

PACKAGE NO.	MACHINE(S)
XASM6800	MC6800,02,08
XASM6801	MC6801
XASM6805	MC6805
XASM6809	MC6809
XASM8085	8080,8085
XASM1802	CDP1802
XASM6502	6500 FAMILY

Full instruction set, all addressing modes. Free-format input, relocatable listing and object module, many user-selectable assembly options. 8-character labels, arithmetic expressions in operands, long error messages, high execution speed.

Full-capability assemblers run on almost any system supporting ANSI standard FORTRAN IV, 1966 or later, at a fraction of the cost of a separate development system.

FORTRAN SOURCE MEDIA	PRICE
MAGNETIC TAPE PACKAGE	$75.00
PUNCHED CARD PACKAGE	$50.00
MANUAL/LISTING ALONE	$20.00

Packages include manual/listing, shipping in U.S.A. For cards, specify punch code. For tape, specify code, BPI, block size.

IDM

P.O. Box 14538
Minneapolis, MN 55414
(612)-722-1702

Circle 254 on inquiry card.

GET Paid for using your Computer

FUN! Easy

RUSH COUPON FOR FREE FACTS

GREAT SPARE TIME

Send today to — DAR-B11
209-5 Kenroy, Roseville, CA 95678

CASH

NAME

STREET

CITY

STATE ZIP

Circle 255 on inquiry card.

JEPSAN, Group K Incorporated
Sales Installation Service of Computers

* PERSCI DISK REPAIR *

MINIMIZE DOWN TIME BY CALLING

(616) 698-8700
CROMEMCO Dealer

4180 44th Street S.E.
Grand Rapids, MI 49508

Circle 256 on inquiry card.

Listing 3: *Algebraic intergration in muMATH-79. Listing 3a shows the creation of the function FC1, which equals $X^2+\ln(X)$. Listing 3b shows the calculation of the indefinite integral of FC1, while listing 3c shows the calculation of its definite integral from e to 2e. (See the text for these two equations written in conventional form.)*

```
(3a)  ? FC1:X^2+LN(X);

      @ X^2 + LN(X)

(3b)  ? INT(FC1,X);

      @ -X + X*LN(X) + X^3/3

(3c)  ? DEFINT(FC1,X,#E,2*#E);

      @ -2*#E + 2*#E*LN(2*#E) + 7*#E^3/3
```

It works with the resources of whatever packages are loaded into it at the time. For example, if the trigonometric package is loaded, muMATH-79 can do the following:

```
? DIF(COT(2*X),X);
@ -2 * CSC(2*X)↑2
```

which translates as:

$$\frac{d}{dX}\cot 2X = -2\csc^2(2X)$$

Indefinite and definite integrals are also within muMATH's capabilities. The definite integral is calculated by simple substitution of the integral limits into the result of the indefinite integration, in much the same process a person performs. If muMATH-79 cannot do this, it simply returns the indefinite integral. Listing 3 shows its calculation of the following two integrals:

$$\int X^2+\ln(X)\,dX = \frac{X^3}{3}+X\ln(X)-X+C$$

and

$$\int_e^{2e} X^2+\ln(X)dX = \frac{7e^3}{3}+2e\ln(2e)-2e$$

muMATH-79 Control Variables

The package does not exhibit artificial intelligence. (Although with some of its accomplishments, it *seems* to exhibit it.) Rather, it is a very sophisticated symbol manipulator that rigorously applies a given set of rules to arrive at a transformed result. But achieving a desired algebraic manipulation is not always an exact process.

For example, consider the trivial example given in figure 1a. If the denominator is distributed over the numerator, the result is the expression in figure 1b. But if we factor the numerator first, the discovered factor of $(X+1)$ in the numerator cancels the $(X+1)$ in the denominator, leaving the simplified answer in figure 1c.

muMATH-79 cannot make these decisions; it is a tool, not a problem solver. So certain variables called *control variables* are introduced into its environment. Under human control, these variables are used to tell muMATH-79 what manipulations to make.

(a) $\dfrac{X^3+X^2}{(X+1)}$

(b) $\dfrac{X^3}{(X+1)}+\dfrac{X^2}{(X+1)}$

(c) $\dfrac{X^3+X^2}{(X+1)} = \dfrac{X^2(X+1)}{(X+1)} = X^2$

Figure 1: *Options in the transformation of an algebraic expression. The simple expression in figure 1a can be transformed to that of figure 1b by distributing the denominator over the terms of the numerator. A more useful transformation, however, is shown in figure 1c. By factoring out a term of X^2 and cancelling out the $(X+1)$ factor in both numerator and denominator, the expression can be considerably simplified.*

Circle 257 on inquiry card.

Payroll
General Ledger
Accounts Payable
Accounts Receivable

Flexible and sophisticated business software that is of the highest quality. Originally developed by Osborne & Associates and rapidly becoming a standard. Accountants are pleased with our balance sheets and income statements. It has been tested and approved by secretaries.

- Complete instructions
- Up and running the same day of delivery.
- 100% guaranteed
- Unlimited free telephone assistance.
- Return within 30 days for complete refund if not satisfied.
- No licensing agreement – use as you want.

Accounts Receivable	$145.00
Accounts Payable	$145.00
Payroll-California	$145.00
Payroll-Non California state income tax calculations (add to California payroll)	$125.00
General Ledger	$145.00
Multiple profit center option for general ledger	$ 50.00
Manuals (each)	$ 20.00

Formats: Any 8" single or double density, TRS-80 Mod II, Northstar DD, Vector Graphics, Super Brain, many others.
Runs on Beehive, Soroc, Hazeltine, ADDS, Televideo, SOL, TRS-80 Mod II, HEATH, ACT V, Intertube II, Altos, ADM and many other terminals. All programs in CBASIC under CP/M (includes source).

Synergetic Computer Products
575 Middlefield Avenue Suite J, Palo Alto, CA 94301
(415) 328-5391

VISA • Master Charge • COD • Company Check
TRS-80 is a trademark of Radio Shack, Inc. CP/M is a trademark of Digital Research

Circle 258 on inquiry card.

NOBODY DOES IT LIKE SYNCHRO-SOUND!



HAZELTINE 1420 VIDEO TERMINAL $775.00

HAZELTINE 1500 VIDEO TERMINAL $849.95



SYNCHRO-SOUND ENTERPRISES, INC.
The Computer People
193-25 Jamaica Avenue
Jamaica, N.Y. 11423

PHONE ORDERS, CALL:
New York—212/468-7067
Los Angeles-213/628-1808
Chicago-312/641-3010
Dallas-214/742-6090

Circle 259 on inquiry card.


Multi-User Capabilities for MicroNOVA™

Wild Hare Puts Muscle Into Your MicroNOVA™ By Adding Multi-User Capabilities To DG's DOS!

- Supports up to five users simultaneously executing jobs
- All Data General languages for MicroNOVA™ are supported
- User shared code support
- Independent user directories
- Record lockout facility
- Printer spooling package

Now Data General Users Have A Choice!

WILD HARE COMPUTER SYSTEMS INC.
P.O. Box 3581, Boulder, Colorado 80307
(303) 422-1182




Pacenter™ Desoldering Systems


MODEL PC-10: Finger Controlled

REMOVE ANY COMPONENT FROM ANY PCB . . . QUICKLY AND SAFELY



MODEL PC-20: Footpedal Controlled





STANDARD SYSTEM FEATURES
- Lightweight and Portable
- Internal Vacuum Pump
- Sodr-X-Tractor Handpiece
- Variable Temperature Control

PACE™ INCORPORATED
9893 Brewers Court ■ Laurel, Md. 20810 ■ phone (301) 490-9860

Although an explanation of the intricacies of control variables is beyond the scope of this review, the topic does deserve some explanation. Table 1 is a list of the control variables and their effects on algebraic expressions. Table 2 shows the effect of one control variable, NUMNUM, on expressions. (Most control variables behave similarly, with positive values causing an expansion of terms to take place and negative values causing a combination of terms to take place.)

Generating a muMATH-79 System

Because muMATH-79 can potentially use more than 64 K bytes of memory, the system is supplied as a series of packages that can be combined to create an optimal environment for a given purpose. Figure 2 shows a *dependency diagram* from the muMATH-79 packages as they are supplied. To run a given package, you must load that package and all the packages above it. For example, to manipulate algebraic and logarithmic expressions, you must load the file named MUSIMP79 (which loads MUSMORE automatically), ARITH, ALGEBRA, and LOG, in that order. To solve equations that use logarithmic expressions, you would add to the above the files EQN and SOLVE.

Of course you would like to have all the packages available at once. Unfortunately, due to the large size of the packages, this cannot be done. A 32 K-byte system is necessary to run anything in muMATH-79, but more memory is recommended. It takes 40 K bytes, for example, to run algebra and 48 K bytes to run either calculus or matrix algebra.

A muMATH-79 system is first generated and then saved for future loading into the same system. Each package takes 1 to 5 minutes to load, given a Z80 system running at 4 MHz; loading time will be proportional to the speed of the processor being used.

Another method of loading, called *condensation*, takes from 10 minutes to 1 hour per module to load, but it has the advantage of loading the same module in just over half as much memory. At BYTE Publications Inc, we are running a condensed system in 56 K bytes that includes all the muMATH-79 packages except TRACE, ARRAY, and MATRIX. It took an afternoon to set up the system, but the time was well spent, because all the packages interact with each other. However, problem solution time decreases with increased unused memory. Decreasing the number of packages used would probably cut the solution times of problems, but so far the delays encountered have been hardly objectionable.

The muSIMP-79 Language

An unexpected benefit of the muMATH-79 package is the inclusion of the muSIMP-79 language. muMATH-79 as supplied is actually a series of source files written in muSIMP-79. Inclusion of the source files allows you the very important

Control Variable	Result with Positive Value	Result with Negative Value
NUMNUM	$A(B+C) \rightarrow AB+AC$	$AB+AC \rightarrow A(B+C)$
DENDEN	$\frac{1}{A}\left(\frac{1}{B+C}\right) \rightarrow \frac{1}{AB+AC}$	$\frac{1}{AB+AC} \rightarrow \frac{1}{A}\left(\frac{1}{B+C}\right)$
DENNUM	$\frac{B+C}{A} \rightarrow \frac{B}{A}+\frac{C}{A}$	$\frac{B}{A}+\frac{C}{A} \rightarrow \frac{B+C}{A}$
NUMDEN	$\frac{A}{B+C} \rightarrow \frac{1}{\frac{B}{A}+\frac{C}{A}}$	$\frac{1}{\frac{B}{A}+\frac{C}{A}} \rightarrow \frac{A}{B+C}$
BASEXP	$A^{B+C} \rightarrow A^B A^C$	$A^B A^C \rightarrow A^{B+C}$
EXPBAS	$(AB)^C \rightarrow A^C B^C$	$A^C B^C \rightarrow (AB)^C$
PWREXPD	$(A+B)^2 \rightarrow A^2+2AB+B^2$	$(A+B)^{-2} \rightarrow \frac{1}{(A^2+2AB+B^2)}$
	$(A+B)^3 \rightarrow A^3+3A^2B+B^3$	$(A+B)^{-3} \rightarrow \frac{1}{A^3+3A^2B+3AB^2+B^3}$
	(etc)	(etc)


Table 1: *The effect of control variables on symbolic manipulation within muMATH-79. The values given to these control variables determine how muMATH-79 manipulates algebraic expressions. Other control variables not listed in this table are TRGSQ, TRGEXPD, LOGBAS, PBRCH, and LOGEXPD, which control trigonometric and logarithmic expressions.*

Value of NUMNUM	Transformation	Example
0	do nothing	$3A(B+C)(D+E) \rightarrow 3A(B+C)(D+E)$
2 and its multiples	distribute constants over sums	$\rightarrow A(3B+3C)(D+E)$
3 and its multiples	distribute monomials over sums	$\rightarrow 3(AB+AC)(D+E)$
5 and its multiples	distribute sums over sums	$\rightarrow 3A(D(B+C)+E(B+C))$
6 (=2•3)	distribute constants and monomials over sums	$\rightarrow (3AB+3AC)(D+E)$
10 (=2•5)	distribute constants and sums over sums	$\rightarrow A(D(3B+3C)+E(3B+3C))$
15 (=3•5)	distribute monomials and sums over sums	$\rightarrow 3(ABD+ABE+ACD+ACE)$
30 (=2•3•5)	distribute constants, monomials, and sums over sums	$\rightarrow 3ABD+3ABE+3ACD+3ACE$
−2, −3, −6	same as 2, 3, 6, only factor out instead of distribute	NUMNUM = −3 causes $3AB+3AC \rightarrow A(3B+3C)$

Table 2: *A detailed example of the effect of the control variable NUMNUM on algebraic expressions. NUMNUM is so named because it controls the distribution or factoring of a numerator expression with the numerator expression containing it. Positive values cause a factor to be distributed across a sum, while negative values cause factoring a common value from a sum.*

Circle 260 on inquiry card.

IEEE-488 BUS
SYSTEM BUILDING BLOCKS
For Commodore PET/CBM and other computers...

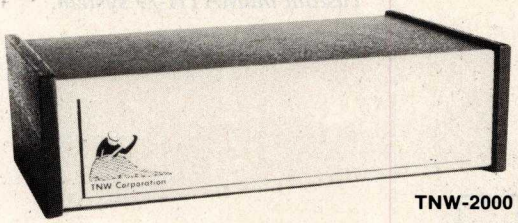

TNW-2000

TNW-1000 — **Serial Interface: $129**
1 channel output only

TNW-2000 — **Serial Interface: $229**
1 channel input and output

TNW-232D — **Dual Serial Interface: $369**
2 channels input and output plus RS-232 control lines

TNW-103 — **Telephone Modem: $389**
Auto answer/auto dial. Use with DAA

SOFTWARE

PTERM: A program that turns your PET into a terminal (Use with TNW-2000, TNW-232D, or TNW 103)
SWAP: Allows storage of up to 8 programs in PET memory at once. Run them in any order.
PAN: A sophisticated electronic mail program (use with TNW-103)


TNW CORPORATION

Write or call for information today:

TNW Corporation
3351 Hancock Street
San Diego CA 92110
(714) 225-1040

Circle 261 on inquiry card.

DEC LSI-11 Components
Dependable service at discount prices
Domestic and Export




Mini Computer Suppliers, Inc.
25 Chatham Rd., Summit, N.J. 07901
Since 1973
(201) 277-6150 Telex 13-6476

©Mini Computer Suppliers, Inc. 1979

SPECTACULAR
Offers

BASF "FLEXYDISK"
Superior quality data storage medium, certified and guaranteed 100% error free.

5¼" or 8"* Diskettes 10/ $24
5¼" or 8" Vinyl Storage Pages 10/ $5
Write for quantity discounts
*Single sided / Single Density




SFD CASSETTES
"Super Ferro Dynamic" Using the finest Agfa PE 611 tape in a professional quality housing.

C-10 Cassette Sonic Weld Housing 10/ $7
Add 10¢ p/cassette for 5 screw housing
Cassette Album Page $1.89
Write for quantity discounts




LIBRARY CASE
3-ring binder album, Protects your valuable programs on disks or cassettes. Fully enclosed and protected on all sides similar to Kas-sette storage box.

Library 3-ring binder $6.50
5¼"mini Kas-sette 10/$2.49
8" Kas-sette 10/$2.99
Write for quantity discounts




DISKETTE DRIVE
head cleaning kits prevent head crashes and insure efficient error-free operation.

5¼" or 8" KIT
INTRODUCTORY PRICE $19.50



HARDHOLE
reinforcing ring of tough mylar protects your disks from damage.

8" applicator $4.00
5¼" applicator $3.00
8" mylar hardholes (50) . $8.00
5¼" mylar hardholes (50) $6.00



ABM PRODUCTS
631 "B" St.
San Diego, CA 92101
(714) 235-6602

VISA • MASTERCHARGE • MONEY ORDERS CERTIFIED CHECK • FOR PERSONAL CHECKS ALLOW 2 WEEKS • C.O.D. REQUIRES A 10% DEPOSIT • CAL. RES. ADD 6% SALES TAX MIN. $2 SHIPPING & HANDLING • MINIMUM ORDER $10 • SATISFACTION GUARANTEED OR FULL REFUND.

The WORKSHEET Problem-Solving Language

Want to play "What-if"? Want to do Real Estate Analysis, Family Budgeting, Taxes, Company Cash Flow; want to evaluate the effect of changing assumptions on complex and interrelated processes? WORKSHEET is a powerful language designed for the purpose of writing programs to solve these and all other programs that involve a row-column "spreadsheet". Even non-programmers are solving complicated problems (e.g., the loads on a bridge as a train progresses across it) within the first day! For use with MicroSoft Basic or with North Star Basic under CP/M (please specify).

WORKSHEET Language disk (5" or 8" CP/M) $99.95
Manual only 19.95

NORTH STAR BASIC—CP/M
Fabulous North star Basic Meets The Industry Standard CP/M Operating System

North Star Basic users are switching to CP/M—all over the world—and we made it possible! The software professionals at the SoHo group present The MATCHMAKER, an easy-to-use conversion which enables North Star owners who also own the CP/M operating system to gain the full power of their North Star Basic, running under CP/M. You'll have dynamic file allocation, automatic file creation and extension, and automatic reuse of deleted files, all under the control of the powerful instruction set of the outstanding North Star Basic interpreter.,

Installation takes about 30 minutes and involves no disassembly or machine coding. Every powerful feature of both systems is maintained with this professional piece of software. And the instructions are COMPLETE and easy to follow.

The MATCHMAKER $89.95 ppd.
Manual only 9.95 ppd.

The SoHo Group
140 Thompson St., Suite 4-B
New York, NY 10012

Note: CP/M, Microsoft, and North Star are registered trademarks of Digital Research, Microsoft, and North Star Computers, respectively.

Circle 262 on inquiry card.

Circle 263 on inquiry card.

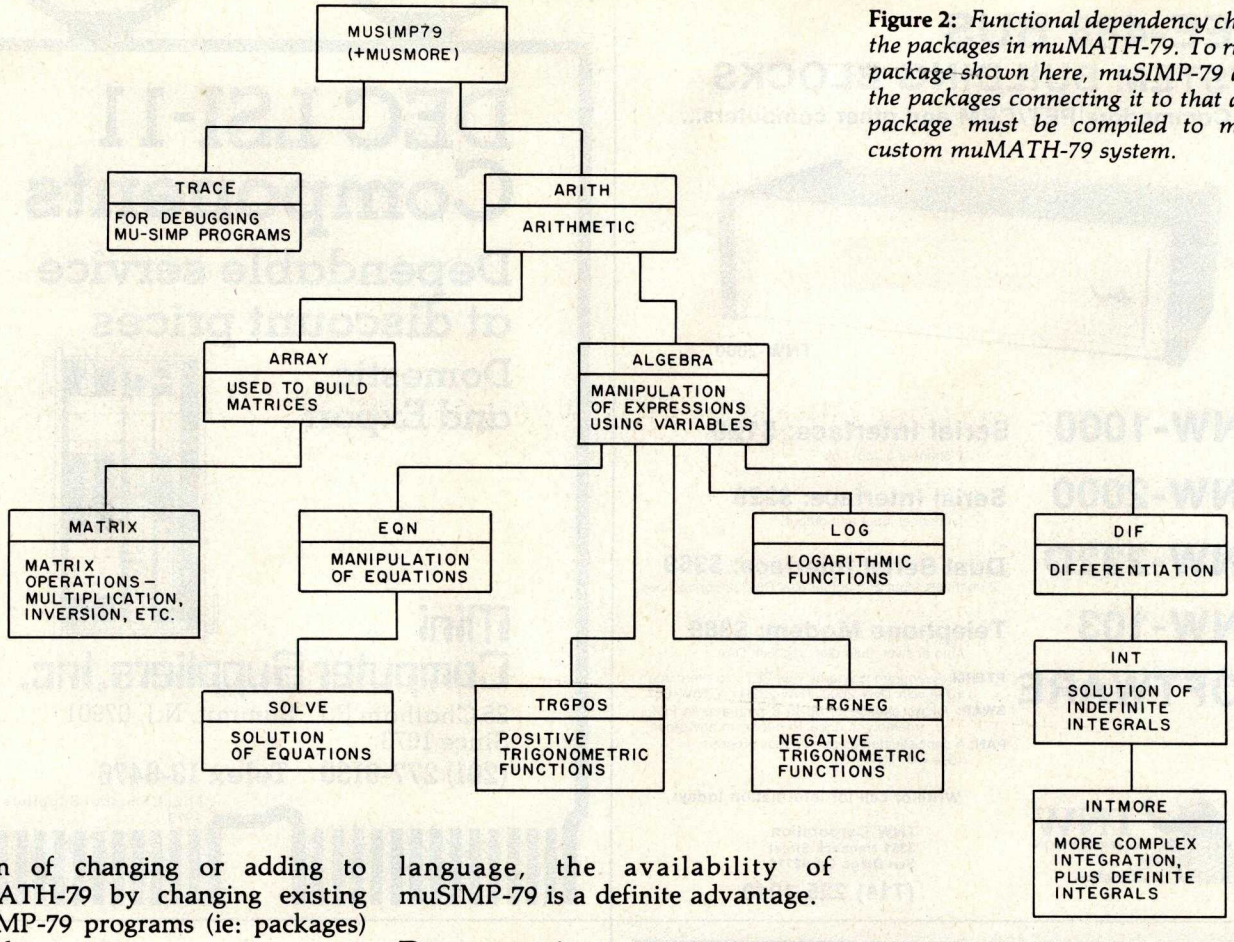


Figure 2: *Functional dependency chart for the packages in muMATH-79. To run any package shown here, muSIMP-79 and all the packages connecting it to that desired package must be compiled to make a custom muMATH-79 system.*

option of changing or adding to muMATH-79 by changing existing muSIMP-79 programs (ie: packages) or adding your own.

muSIMP-79 is a variation of the well-known list-processing language LISP; it has been adapted for readability and optimized for the manipulation of symbolic expressions. Considering that the entire capabilities of muMATH-79 are based on the use of the muSIMP-79 language, the availability of muSIMP-79 is a definite advantage.


Documentation

The muSIMP/muMATH-79 Symbolic Math System comes with all its associated files on floppy disk and its printed documentation in a three-ring binder. There are about 175 pages of printed documentation in the reference manual, with tabbed sections marked General Information, Calculator-Mode Lessons, Programming-Mode Lessons, muSIMP-79, Arithmetic, Algebra, Equation, Matrix, Log and Trig, and Calculus.

All of the sections consist of either documentation or source code for a particular package, both of which are

Never so fast . . . Never so easy!

3D Animation for the Apple II

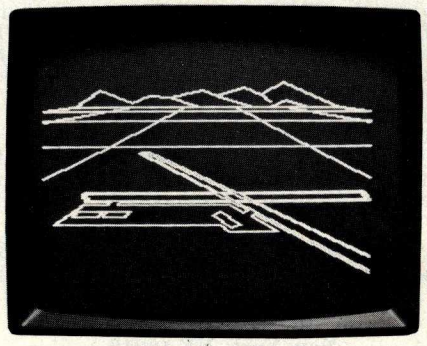

With SubLOGIC's A2-3D1 high-speed 3D animation package for your Apple, you can • generate scenes or drawings • view them from any distance or angle and, yes • even rotate them. All you need is 16K RAM and the creative urge.

116 pages of documentation included to guide the beginner through scene creation, storage, retrieval, movement, and advanced applications.

Special Features:
- 100-150 lines-per-second projection rate
- Dual page flicker free animation
- Scenes created with standard coordinates
- Easy use with BASIC programs

Cassette $45 or disk $55. See your dealer or order direct (include $1.75 for UPS or $2.50 for first class mail). Illinois residents add 5% sales tax. Visa and Mastercard accepted.

The engineering and graphics experts opening a new era in computer simulation.

subLOGIC
Distribution Corp.
Box V, Savoy, IL 61874
(217) 359-8482

Circle 278 on inquiry card.

Circle 264 on inquiry card.

Circle 265 on inquiry card.

X.25 BISYNC SDLC/SNA

IBM 2770 IBM 2780
IBM 3270 IBM 3741
IBM 3780
IBM 3767

Software for Your Microcomputer
8080 Z80 8086 Z8000

WINTERHALTER & ASSOCIATES, INC.
3825 N. Zeeb Road Dexter, Michigan 48130
313-426-3029 or 313-665-5582

SPECIALISTS IN DATA COMMUNICATIONS

TRS-80 LEVEL II

$685. COMPLETE SYSTEM

Limited quantity in stock

The world's most popular microcomputer, with 16K of memory and Level I I basic for only $685, complete with full 90 day Radio Shack warranty. We accept check, money order or phone orders with Visa or Master Charge. (Shipping costs added to charge orders).

Disk drives, printers, peripherals, software and games . . . you name it, we've got it (Both Radio Shack & other brands). Write or call for our complete price list.



Shown is Level I. Level II includes Alphanumeric keypad.


C&S ELECTRONICS MART Ltd.

AUTHORIZED DEALERSHIP Radio Shack

32 E. Main Street ● Milan Michigan 48160 ● (313) 439-1400

BYTE

Back Issues for sale

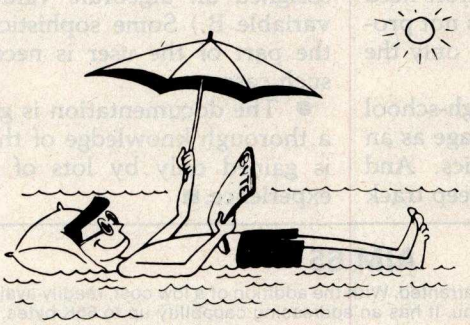

The following issues are available:
1976: July and November
1977: March, May thru December
1978: February thru October, December
1979: January thru December except March
1980: January to current issue except February
Cover price for each issue through August 1977 is $1.75 Domestic; $2.75 Canada and Mexico; $3.75 Foreign.
September 1977 through October 1979 issues are $2.50 Domestic; $3.25 Canada and Mexico; $4.00 Foreign.
November 1979 to current is $3.00 Domestic; $3.75 Canada and Mexico; $4.50 Foreign.
Send requests with payment to:

BYTE Magazine
70 Main St, Peterborough NH 03458
Attn: Back Issues

BUY COMPUTERS BY MAIL ORDER AND SAVE 16%

APPLE HARDWARE

16K	$ 958.00
32K	$1,040.00
48K	$1,099.00
Disk with Controller	$ 495.00
Disk	$ 440.00
Pascal	$ 445.00
Graphics Tablet	$ 655.00
Symtek Light Pen	$ 215.00
Versawriter Digitizer System	$ 215.00
Videx Videoterm 80 Column Card	$ 315.00
with graphics-ROM	$ 335.00
Apple Clock	$ 225.00
Micro Soft Z-80 Software Card with CPM	$ 319.00
Parallel Printer Card	$ 145.00
Communications Card with connecting cable	$ 185.00
Apple II Firmware Card	$ 149.00
Integer Basic Firmware	$ 149.00

SOFTWARE

Controller (General Business System)	$ 519.00
Cashier (Retail Mgmt & Inventory System)	$ 199.00
Apple Post Mailing List	$ 45.00

CROMEMCO
SAVE 16% ON ALL EQUIPMENT

NORTHSTAR

Horizon-2-32KDD	$2,390.00

VERBATIM & MEMOREX

5¼"	$ 27.50

PLASTIC BOXES

5¼"	$ 2.25
8"	$ 3.50

Send certified check (regular checks require 2 weeks to clear) or charge to VISA or Master Charge. Customer pays shipping.

MIRO COMPUTERS, INC.
27 Long Meadow Place South Setauket, L.I., N.Y. 11720
(516) 423-7955 CALL MON.-SAT., 10AM-6PM

Circle 266 on inquiry card.

available on the disk in machine-readable form. Included are sections on building, saving, and using a muMATH-79 *environment* (which is the muMATH-79 packages compiled plus all the variable and status assignments completed to date). In addition, ten files (five for each subject) that execute interactively on the host computer cover the topics of using muMATH-79 in what is called *calculator mode* and of programming in muSIMP-79.

The Soft Warehouse prints an occasional newsletter that contains updates, additions, and (very occasionally) corrections to its muSIMP/muMATH-79 and muLISP (another of its products) systems. The people at the Soft Warehouse have been friendly and informative every time I've called them.

At a Glance:	
Name of program	muSIMP/muMATH-79
Type of program	language/utility
Manufacturer	The Soft Warehouse POB 11174 Honolulu HI 96828 (808) 734-5801
Price	$290
Format	5-inch or 8-inch disk
Language used	8080 machine language
Computer needed	an 8080, 8085, or Z80-based computer running CP/M, CDOS, IMDOS, or TRSDOS operating systems
Documentation	175 pages, 8½ by 11 inches, in three-ring binder
Audience	high-school and college students, educators, programming language enthusiasts

muMATH-79 for the TRS-80


Microsoft Consumer Products of Bellevue, Washington (a sibling company to the Microsoft of Microsoft BASIC fame) is marketing two versions of muSIMP/muMATH-79 for the TRS-80. The first version, equivalent to the one described in this review, will sell for $250.

A slightly diminished version of the system will be available for $75—a very reasonable price. Although I have not seen it, the manufacturer informs us that the system will come with two floppy disks (one for 32 K-byte systems, one for 48 K-byte systems) and an abbreviated manual. The floppy disk for the 32 K-byte system will include muSIMP-79, a precompiled module including the arithmetic, algebra, and equation-solution packages, and uncompiled logarithmic and positive and negative trigonometric packages.

The floppy disk for the 48 K-byte TRS-80 system will be the same but will add the differentiation package and most of the integration packages in the compiled module. Both versions have extensions that allow muSIMP to access the TRS-80 graphics.

Conclusions

- The muSIMP/muMATH-79 Symbolic Math System is a very impressive tool. It fills a gap in the spectrum of problems solvable by a computer.
- Although it cannot work wonders, muSIMP/muMATH-79 *can* solve many of the problems encountered in algebra, trigonometry, and even calculus classes. (Educators need not fear: muMATH-79 does not provide a solution's derivation, only the final answer.)
- Educators from the high-school level up have used the package as an aid to teaching mathematics. And researchers have used it to keep track of equations during complex manipulations. Other potential users include: engineers demanding exact numeric solutions of problems and matrices (the fractional answers can be divided out conventionally to give decimal answers of any accuracy); researchers interested in artificial intelligence; college professors studying programming languages, and all those in need of a calculator.
- Although this is no fault of the package, muMATH-79 occasionally behaves in a way that, although correct, leads to unexpected and seemingly mysterious results. (I, for example, was unable to save a compiled package to disk drive B because I had assigned an algebraic value to the variable B.) Some sophistication on the part of the user is necessary in such cases.
- The documentation is good, but a thorough knowledge of the system is gained only by lots of practical experience.■

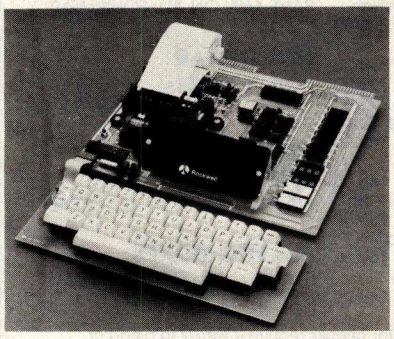

AIM 65

AIM 65 is fully assembled, tested and warranted. With the addition of a low cost, readily available power supply, it's ready to start working for you. It has an addressing capability up to 65K bytes, and comes with a user-dedicated 1K or 4K RAM.

- **Thermal Printer**
- **Full-Size Alphanumeric Keyboard**
- **True Alphanumeric Display**
- **Proven R6500 Microcomputer System Devices**
- **Built-In Expansion Capability**
- **TTY and Audio Cassette Interfaces**
- **ROM Resident Advanced Interactive Monitor**
- **Advanced Interactive Monitor Commands**

PRICE: $389.00

Plus $4.00 UPS (shipped in U.S. must give ***street*** address), $10 parcel post to APO's, FPO's, Alaska, Hawaii,Canada, $25 air mail to all other countries

We manufacture a complete line of high quality expansion boards. Use reader service card to be added to our mailing list, or U.S. residents send $1.00 (International send $3.00 U.S.) for airmail delivery of our complete catalog.

RNB ENTERPRISES INCORPORATED

2951 W. Fairmount Avenue • Phoenix, AZ 85017 • (602) 265-7564

Circle 267 on inquiry card.

MICROSTAT NOW AVAILABLE FOR CP/M*

MICROSTAT, the most powerful statistics package available for microcomputers, is completely file-oriented with a powerful Data Management Subsystem (DMS) that allows you to edit, delete, augment, sort, rank-order, lag and transform (11 transformations, including linear, exponential and log) existing data into new data. After a file is created with DMS, Microstat provides statistical analysis in the following general areas: Descriptive Statistics (mean, sample, and population S.D., variance, etc.), Frequency Distributions (grouped or individual), Hypothesis Testing (mean or proportion), Correlation and Regression Analysis (with support statistics), Non-parametric Tests (Kolmogorov-Smirnov, Wilcoxon, etc.), Probability Distributions (8 of them), Crosstabs and Chi-square, ANOVA (one and two way), Factorials, Combinations and Permutations, plus other unique and useful features.

MICROSTAT requires 48K, Microsoft MBasic with CP/M and is sent on a single-density 8" Disk. It is also available on 5" diskettes for North Star DOS and Basic (32K and two drives recommended), specify which when ordering. The price for Microstat is $250.00. The user's manual is $15.00 and includes sample data and printouts. We have other business and educational software, call or write:

master charge THE INTERBANK CARD

ECOSOFT
P.O. Box 68602
Indianapolis, IN 46268
(317) 283-8883

** CP/M is a registered trade mark of Digital Research.*



pk systems, inc.

- **Quantity Discounts Available**
- **90-day Warranty**
- **Ask about our unique "Guaranteed Custom Programming"**

ZENITH DATA SYSTEMS

	LIST	OUR PRICE
Z89 MICROCOMPUTER SYSTEM ..... 48KB Memory, Z19 Video Terminal (24 x 80), 2 Serial EIA ports, Single 5" Diskette Drive	$2,895	$2,495
Z19 Smart Video Terminal ....SPECIAL . . 24 lines x 80 col, Reverse Video, Numeric keypad	$ 950	$ 795
HDOS Operating System (with BASIC)....	$ 150	$ 145
Microsoft Basic	$ 150	$ 145
Word Processing for Z89 System.....	$ 395	$ 375
Dual 5" Diskette Drive for Z89 System	$1,195	$1,095

To Order: Send Check or Money Order to: PK Systems, Inc., 113 North Center, Bloomington, IL 61701. Allow two weeks for personal checks to clear. For COD Orders, add 5% for handling and service charge. Rush orders, add $50.00

Shipping: Freight collect, FOB Bloomington. We ship UPS, air freight, or motor freight.

PK Systems is an Authorized Zenith Data Systems Dealer and Zenith Service Center.

A Message to our Subscribers

From time to time we make the BYTE subscriber list available to other companies who wish to send our subscribers promotional material about their products. We take great care to screen these companies, choosing only those who are reputable, and whose products, services, or information we feel would be of interest to you. Direct mail is an efficient medium for presenting the latest personal computer goods and services to our subscribers.

Many BYTE subscribers appreciate this controlled use of our mailing list, and look forward to finding information of interest to them in the mail. Used are our subscribers' names and addresses only (no other information we may have is ever given).

While we believe the distribution of this information is of benefit to our subscribers, we firmly respect the wishes of any subscriber who does not want to receive such promotional literature. Should you wish to restrict the use of your name, simply send your request to BYTE Publications Inc, Attn: Circulation Department, 70 Main St, Peterborough NH 03458. Thank you.

CATCH THE S-100 INC. BUS!



	LIST PRICE	OUR SPECIAL CASH PRICE
SSM I/O-4 2P+2S KIT	210.00	144.00
GODBOUT ECONORAM XX-16K UNKIT	319.00	272.00
S.D. SYSTEMS SBC-100 Z-80 KIT	295.00	219.00
IMSAI "8080" FRONT PANEL COMPUTER W/MPU-A A & T	1,150.00	800.00
MORROW DESIGNS SWITCHBOARD I/O KIT	199.00	170.00
ITHACA INTERSYSTEMS DPS-1 W/MPU-80 A & T	1,795.00	1,499.00
SHUGART SA-800 BARE DRIVE	650.00	475.00
NORTH STAR MDS-A DOUBLE DENSITY DISK SYSTEM A & T	899.00	699.00

Subject to Available Quantities • Prices Quoted Include Cash Discounts. Shipping & Insurance Extra.

We carry all major lines such as S.D. Systems, Cromemco, Ithaca Intersystems, North Star, Sanyo, ECT, TEI, Godbout, Thinker Toys, SSM. For a special cash price, telephone us.

S-100, inc.
7 White Place, Clark, N.J. 07066
201-382-1318
Hours: Mon. - Fri. — 10 a.m. to 6 p.m.

An 8088 Processor for the S-100 Bus

Part 3

Thomas Woodward Cantrell
2475 Borax Dr
Santa Clara CA 95051

MON88 is a small system monitor for the single-board 8088-based processor described in parts 1 and 2 of this article (September and October 1980 BYTE, pages 43 and 62 respectively).

The current configuration of MON88 implements sixteen commands (expandable to twenty-six) and uses less than 1.5 K bytes of memory. This includes a "large" (approximately 256-byte) video driver required for my hardware environment and lengthy messages (about 128 bytes' worth) that make MON88 easy to use. No attempt was made to optimize the amount of memory used.

Stripping out the video-driver routine (that is, using a hardware *terminal*, rather than software, to create the same effect) and the messages, along with some optimization, can probably reduce code size to 1 K bytes. My plan is to expand the monitor until it fills the 2 K bytes of EPROM (erasable programmable read-only memory) in the 8755A-2 integrated circuit on the processor board. (See table 1 for a quick-reference guide to the MON88 instruction set.)

MON88 Philosophy

The 8088 incorporates very powerful, mainframe-like architectural features such as segmented memory, pipelining, multi- and co-processing "hooks," etc. One key objective of the 8088 project has been to implement the hardware and software in as simple a fashion as possible. This will allow users familiar with traditional 8-bit processors to ease into an understanding of this powerful new machine.

Following the philosophy of simplicity, my 8088 design embodies what is known as the "small model of computation." This model assumes that a given task can be implemented using one set of segmentation register values:

- one 64 K code segment
- one 64 K data segment
- one 64 K stack segment
- one 64 K extra segment

A key feature of the 8088 is that, for many instructions, certain memory segments are used to determine an absolute memory address. This allows instructions to be implemented in fewer bits, contributing to the extremely efficient use of memory in the 8088. This is not a restriction because the default segment can be overridden by using a *segment-prefix* for the instruction in question.

In fact, my decision was to initially use only sixteen of the twenty address lines available on the processor board. In this case, all segments (code, data, stack and extra) totally overlap in the 64 K-byte address space of the processor board. This means we need not concern ourselves with what segment is where, and what instructions assume which segments.

MON88 Organization

The organization of MON88 in memory is shown in figure 1. I will briefly discuss each section. Note that modifications to MON88 for your own environment are discussed later in this article. The following paragraphs describe each section of the monitor.

Storage allocation and constant definition: This section defines commonly used constants and specific I/O (input/output) port addresses, etc. In addition, memory allocation is performed for needed buffer and variable space.

User jump table: This is the first actual code in MON88 consisting of two MON88 entry points (INIT and START) and three I/O entry points (KEYIN, KEYSTAT and VIDOUT). A user program could terminate by jumping to one of the two MON88 entry points. Similarly, a user program could call one of the I/O entry points. When the I/O is done, the return instruction of each I/O routine will give control back to the user program.

Segment register and I/O initialization: The code, data, stack and extra segments (CS, DS, SS and ES) are set overlapping at address 0. Environment-dependent I/O initialization is also performed by this routine.

Main loop: This is the overall control routine for MON88. It prints the prompt character and accepts a one-letter command from the console. The appropriate command-routine address is determined and control is transferred from this routine.

Message storage: Messages used by various commands are stored here. Note that each message is terminated by a 0.

Command jump table: The addresses for the twenty-six possible commands are stored here. Note that


THIS YEAR CPAids

COMPLETE INTEGRATED ACCOUNTING SOFTWARE

MASTER TAX—Professional tax preparation program. Prepares schedules A, B, C, D, E, F, G, R/RP, SE, TC, ES and forms 2106, 2119, 2210, 3468, 3903, 2441, 4625, 4726, 4797, 4972, 5695 and 6251. Printing can be on readily available, pre-printed continuous forms, on overlays, or on computer generated, IRS approved forms. Maintains client history files and is interactive with CPAids GENERAL LEDGER II (see below) ....**$995/$30**
Annual Update Fee **$350**

GENERAL LEDGER II—Designed for CPA's. Stores complete 12 month detailed history of transactions. Generates financial statements, depreciation, loan amortizations, journals, trial balances, statements of changes in financial position, and compilation letters. Includes payroll system with automatic posting to general ledger. Prints payroll register, W2's and payroll checks..... **$450/$30**

Runs with widely accepted CP/M operating system




Lifeboat Associates
THE SOFTWARE SUPER-MARKET

Distributed by
Lifeboat Associates
1651 Third Ave., New York, N.Y. 10028

TM

ZOBEX
Z_S-SYSTEMS

Complete computer on 3 S-100 boards with 32K RAM for $1395.00
Runs M/PM and C/PM



64K RAM

4 MHz No WAIT States
DMA operation,
Bank select in 16K sections

DISK CONTROLLER

8" and 5" DRIVES
All digital design for stable and reliable performance. No one-shots or analog circuitry. BIOS for C/PM available.

Z80 CPU **2-4 MHZ**

2 or 4 serial ports, 3 parallel, one 4K EPROM, Vectored interrupts, real time clock, Software controlled baud rates, Drives daisy wheel printer directly

CARD CAGE
and Fan

6 slot shielded motherboard for good cooling and low noise.

SEND FOR FREE INFORMATIONS
6 months warranty on our boards with normal use

Z_S-SYSTEMS
ZOBEX

5333 Mission Center Rd.,San Diego, CA. 92108
P.O. Box 1847, San Diego, Ca. 92112
(714) 447-3997, (714) 296-9182

To further improve service to our customers we have installed a toll-free WATS line in our Peterborough, New Hampshire office. If you would like to order a subscription to BYTE, or if you have a question related to a BYTE subscription, you are invited to call* (800)258-5485 between 8:00 AM and 4:30 PM Eastern Time. (Friday 8 AM - Noon).
*Calls from continental U.S. only.

BYTE's Toll-free Subscriber W.A.T.S. Line


(800) 258-5485

We thank you and look forward to serving you.

9178

Clipper™





LINE VOLTAGE TRANSIENT CLIPPING

Features Parallel Operation **5000 Hits/Second**

PROTECTS:
- Computers
- Micro-Computer Systems
- Word Processors
- Cash Registers
- Power Supplies

PROTECTS AGAINST:
- High Energy Voltage Transients
- On-Off Switching
- Lightning Induced Transients
- Inrush of On/Off Power

MFD. by Energy Electronic Systems, Inc.
Exclusively for:

678F
TRANSIENT VOLTAGE SURGE SUPPRESSOR UL LISTED

PDF DISTRIBUTORS INCORPORATED

7133 RUTHERFORD ROAD
BALTIMORE, MARYLAND 21207
(301) 298-3130

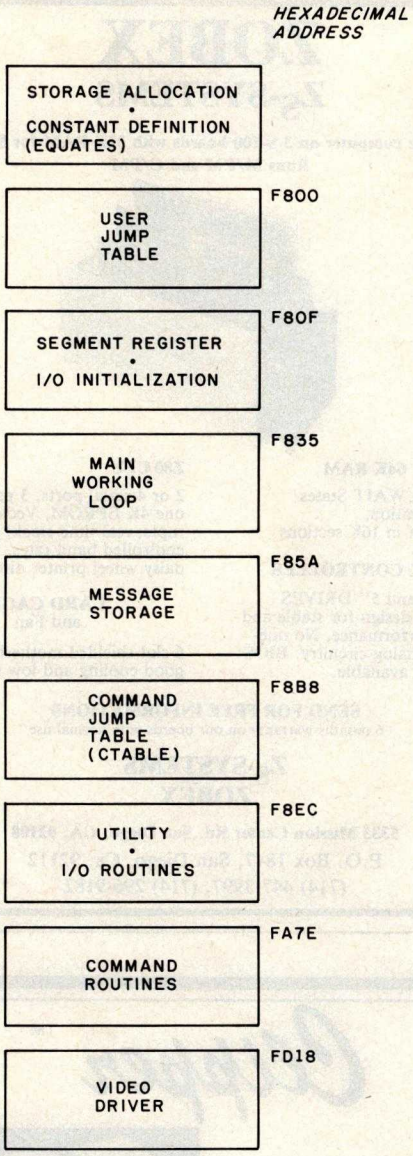


Figure 1: *Memory map for the MON88 monitor.*

unimplemented commands are given the ERR (error) address.

Utility and I/O routines: This and the following (command routines) section make up the bulk of MON88. The utility routines are used by command routines. This allows command routines to be implemented largely as calls to various utility routines (see figure 2). For instance, many commands require the acquisition of a starting and ending address. The utility routine SETUP performs this function. Many of these utility routines may be useful in your own programming efforts.

Command routines: These are the routines that actually perform each command. Due to the extensive use of the above utility routines, most commands are easily implemented as a series of subroutines. A good example is the W (CWRITE) cassette-write command, which dumps a block of memory to tape (see listing 1, starting at line 576). Note that of the twelve "instructions" constituting the command, eight are calls to other routines.

The advantage of programming in this manner is that the command routines are easy to write. Should you

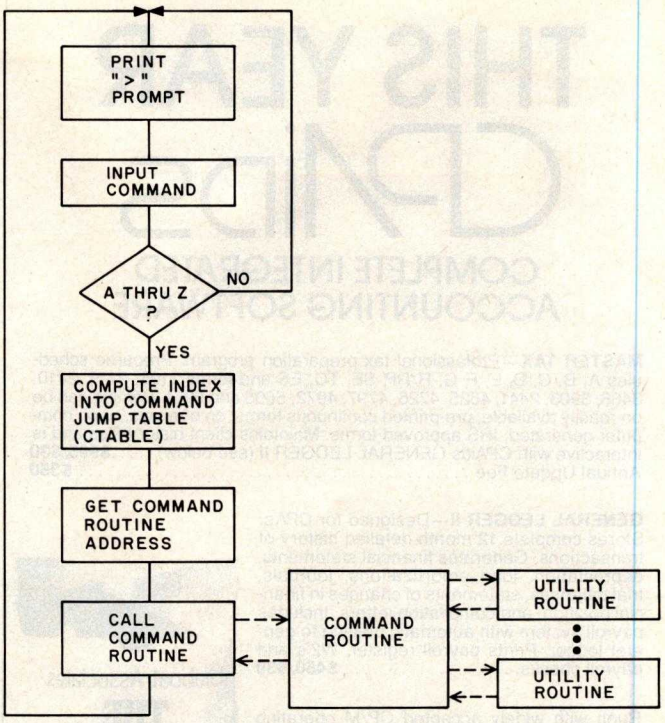


Figure 2: *High-level flowchart for MON88 program. In general, the program decodes user input and, if valid, jumps to the appropriate command subroutine. Once the routine is finished, control is passed back to the command-input routine, and the program prints another prompt.*

want to add commands, they can probably be implemented largely as a series of calls to already-existing, tested utility routines in MON88. This also saves memory space by eliminating redundant coding of essentially the same routine.

Video driver: My hardware requires a relatively lengthy software driver for the video board in my system. I converted this code from 8080 assembly language using Intel's CONV86 code converter. Briefly, the tradeoff is between the performance of the converted code versus a version rewritten for the 8088 and the associated time required for each process. Converted code may be somewhat larger than a rewritten version, but it will probably take only a small fraction of the time to implement as compared to a rewrite. Because the 8088 has a faster clock rate than the 8080, the converted program, even if larger, will probably run faster than the original 8080 version.


Environment Dependence

The dependence of MON88 on a certain I/O or memory environment has been minimized. The following summarizes the changes you will need to make to adapt MON88 to your own system. Refer to listing 1, starting at line 14.

Location of MON88: The statement immediately preceding the EQUATES FOLLOW section sets MON88's origin. For my processor board, the origin is hexadecimal F800:

```
ORG     F800H
```

Text continued on page 346

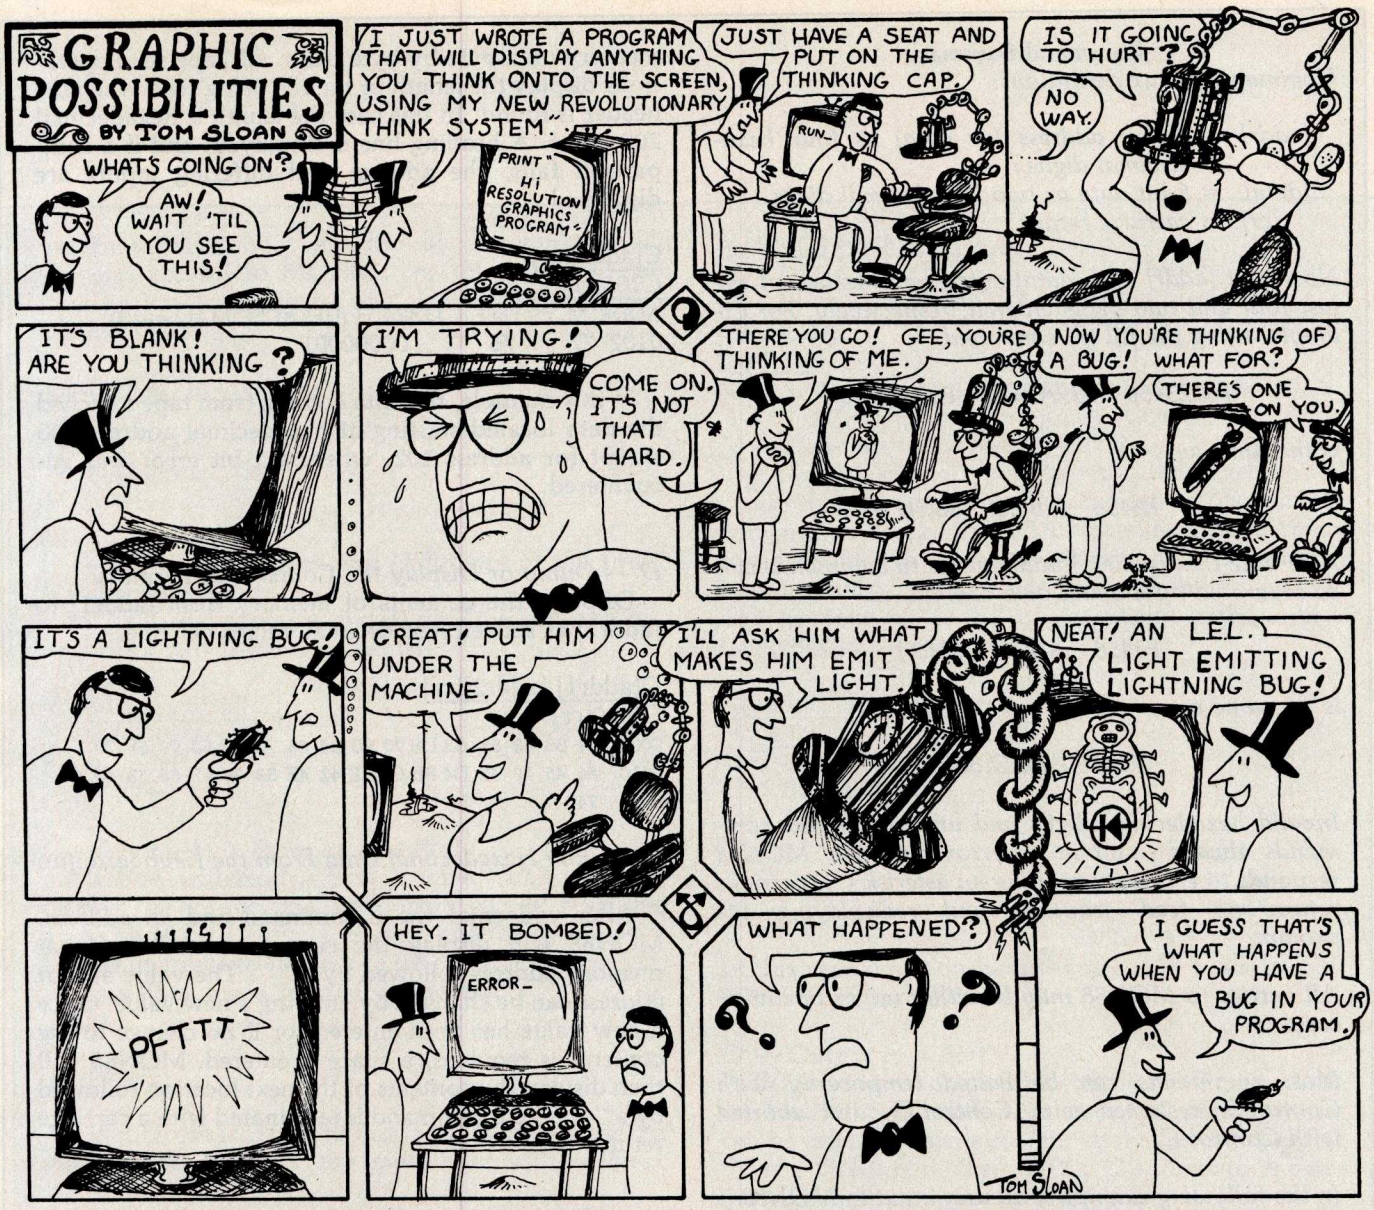

FOR SALE: OHIO SCIENTIFIC C2-8P SYSTEM

Do you want a lot of reliable computing power at a low price? Finances have forced me to sell my OSI C2-8P, which has the following:

- *6502-based OSI 500 processor board*
- *540 video display board with graphics option*
- *powerful 542 polled keyboard*
- *20K bytes of static programmable memory*
- *8-slot motherboard with 5 empty slots*
- *cassette interface and two parallel ports*
- *hefty power supply*
- *all documentation, lots of reprints, OSI extended monitor and assembler tapes, some game and blank tapes.*

My selling price is $675, and I'll pay the shipping. Call me (603) 924-9281 days, or write: Gregory Williams, Shadow Lane Apts, #8, Peterborough NH 03458.

backward moves are acceptable. Overlapping moves can of course have strange results:

```
R100[cr]
LENGTH (HEXADECIMAL) = 0200
```

Command Summary

Command syntax definitions:

S, T, U — Not Implemented

V — Verify the Equality of Two Blocks of Memory

The block of memory from [addr1] to [addr2] will be compared with the block starting at [addr3]. Differences will be noted in hexadecimal and binary:

V[addr1] [addr2] [addr3][cr]
V20 3F 100[cr]

SRC	M	DEST	M	DIFF
0022	10	0122	11	00000001
0030	3E	0130	3F	00000001

In this case, the hexadecimal 20 bytes from hexadecimal addresses 20 to 3F are equal to those at address 100 except for two locations: hexadecimal locations 22 and 122 differ, as do locations 30 and 130.

W — Write to Cassette

The block of memory from [addr1] to [addr2] will be written to tape. MON88 will calculate the length of the block, display it, and write it to the tape header for use by the Read ("R") and Compare ("C") commands:

W[addr1] [addr2][cr]
W100 1FF[cr]
LENGTH (HEXADECIMAL) = 100

The block of memory from hexadecimal 100 to 1FF is written to tape.

X, Y, Z — Not Implemented

Command	Use
A	Enter ASCII text into memory.
B	Not implemented
C	Compare cassette input with memory.
D	Display memory.
E	Enter hexadecimal data into memory.
F	Fill memory with a constant.
G	Go To and execute user program.
H	Hexadecimal math.
I	Input from an I/O port.
J	Not implemented.
K	Toggle keyboard upper/lowercase.
L	Not implemented.
M	Move memory.
N	Nondestructive memory test.
O	Output to an I/O port.
P	Put a continuous 'sync' stream to tape.
Q	Not implemented.
R	Read a file from cassette.
S,T,U	Not implemented.
V	Verify equality of two memory blocks.
W	Write a file to cassette.
X,Y,Z	Not implemented.

Table 1: *A quick reference guide to MON88 commands. Note that only sixteen of the possible twenty-six commands are implemented. While a stripped version of the present monitor can reside in 1 K bytes of memory, there is provision on the processor board for 2 K bytes of EPROM.*

memory on a byte-by-byte basis. All tape-read operations display the length of the file being read when the

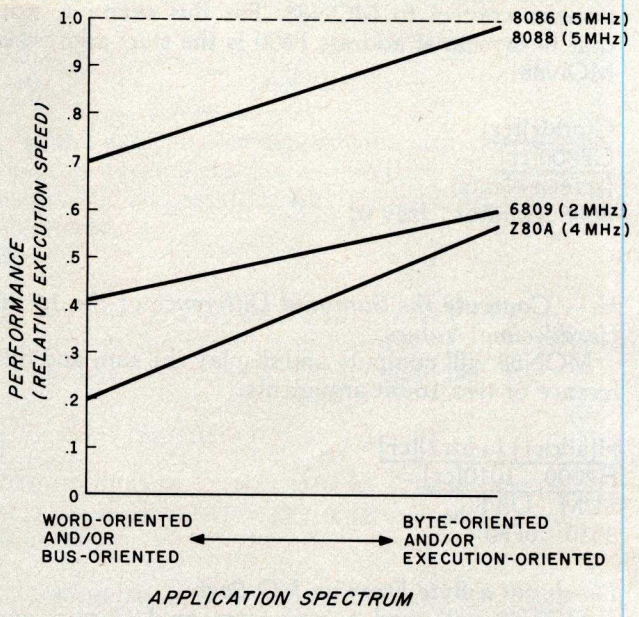


Figure 3: *Relative performance of several 8- and 16-bit microprocessors. The types of programs a processor can run are divided into two groups: those that primarily move data around (word- or bus-oriented) and those that primarily manipulate byte-oriented data or perform many numeric operations. If the 16-bit 8086 microprocessor (dotted line) is defined as a performance figure of 1.0, the other three lines show the approximate relative performance of the three other microprocessors as influenced by the type of program being run.*

Text continued from page 342:

Scratchpad Allocation: My video-board driver uses an 80-byte buffer and a 2-byte X,Y cursor-position variable. These, of course, can be removed or replaced according to your needs. Currently this storage is allocated in the processor boards, 1 K bytes of programmable memory in the (8185-2) device.

The only scratchpad memory required by MON88 is a 1-byte uppercase/lowercase flag variable. This is used by the K (keyboard toggle) command to allow emulation of uppercase-only peripherals in which letters are shifted, but numbers and special characters are not.

If you are not using the processor board described last month and don't have a dedicated scratchpad in the system, UCFLAG can be allocated at the top of memory:

```
UCFLAG    EQU TOPMEM
```

where TOPMEM is the address of the top of memory.

Stack: My stack also resides on the scratchpad memory within the processor board. If you do not have scratchpad, allocate the stack 1 byte below the top of your memory (to leave room for UCFLAG). Note that the stack pointer is decremented before a PUSH operation is performed. Therefore, to allocate the stack 1 byte below the top of memory, set the stack pointer equal to the top of memory:

```
UCFLAG    EQU TOPMEM
STACKP    EQU TOPMEM
```

Listing 1: *Assembly listing of MON88. The flowchart in figure 2 outlines the general operation of the program.*

```
MCS-86 MACRO ASSEMBLER    VID88


ISIS-II MCS-86 MACRO ASSEMBLER V2.0 ASSEMBLY OF MODULE VID88
OBJECT MODULE PLACED IN :F0:VID88.OBJ
ASSEMBLER INVOKED BY:  ASM86 VID88.A86

LOC  OBJ                  LINE     SOURCE

                             1     ;       ********************************************************
                             2     ;       *                                                      *
                             3     ;       *                    M O N 8 8                         *
                             4     ;       *                                                      *
                             5     ;       * A video oriented system monitor for the INTEL 8088  *
                             6     ;       *           written Q1 1980 - revision 0               *
                             7     ;       *           by.. Thomas Woodward Cantrell              *
                             8     ;       *                                                      *
                             9     ;       ********************************************************
                            10     ;
                            11             ASSUME  DS:ABS_0,CS:ABS_0,ES:ABS_0
----                        12     ABS_0   SEGMENT BYTE AT 0
0000                        13     M       LABEL   BYTE
F800                        14             ORG     0F800H
                            15     ;
                            16     ;       ********************************************************
                            17     ;       *                                                      *
                            18     ;       *                  EQUATES FOLLOW                      *
                            19     ;       *                                                      *
                            20     ;       ********************************************************
                            21     ;
  F400                      22     VIDBUF  EQU     0F400H                  ;video buffer
  F450                      23     XY      EQU     VIDBUF+80               ;holder for cursor position
  F452                      24     UCFLAG  EQU     XY+2                    ;upper/lower case flag
  000C                      25     FF      EQU     0CH                     ;form feed (clear screen)
  000A                      26     LF      EQU     0AH                     ;line feed
  000D                      27     CR      EQU     0DH                     ;carriage return
  0008                      28     BS      EQU     08H                     ;backspace
```

Listing 1 continued on page 348

where TOPMEM is the address of the top of memory.

Initialization: I/O initialization is done in the INIT section of the monitor (see listing 1, starting at line 76). Starting at hexadecimal F81D, I initialize the Tarbell cassette interface and TDL Video Interface. Replace the section of code from hexadecimal F81D to F828 to suit your I/O needs.

I/O Drivers

MON88 currently uses the following environment-dependent I/O routines (their hexadecimal addresses are given in parentheses):

- KEYIN (F90F)—Reads a byte from the console keyboard, strips off the parity bit, and returns the character in the AL accumulator.
- KEYSTAT (F922)—Reads the console keyboard's status and returns AL=0 if a key has not been pressed and AL = hexadecimal FF if a key has been pressed.
- CIN (F955)—Reads a byte from a mass-storage device (Tarbell cassette, in my case) and returns the byte in the AL accumulator.
- COUT (F964)—Writes the byte contained in the AL accumulator to the mass-storage device.
- CSTART (FB60)—Sets up the mass-storage device for a write operation. For the Tarbell interface, a start byte and a sync byte are required. Replace this code as necessary for your device.
- READINIT (FB9D)—Sets up the mass-storage device for a read operation. Replace the relevant code as necessary.
- PUTSYNC (FBBF)—Outputs a stream of sync bytes to my cassette. This allows calibrating the interface. If your device has a similar feature, modify the PUTSYNC routine accordingly. If not needed, the whole P (PUTSYNC) command can be removed.
- VIDOUT (FCDA)—This routine outputs the character in the AL accumulator to the console display device. In my case, I converted an 8080 version of the video driver to 8088 code using Intel's CONV86 program. Using the code converter, it took only an hour or so to get the driver up and running. I will rewrite it as necessary to reduce the amount of memory used by MON88.

Adding or Removing Commands

All commands are referenced through CTABLE (Command Jump Table) located at hexadecimal F8B8. Note that the commands are arranged in alphabetical order, A thru Z. To remove a command, simply replace its reference in CTABLE with ERR. For example, to remove the K command (uppercase/lowercase toggle), change:

```
F8CC    DW    KTOGGLE
```

to

```
F8CC    DW    ERR
```

then remove the KTOGGLE code (hexadecimal FCD1 to FCD9).

Similarly, to add a special memory test (for example) and call it using the letter T, first write the code (for example, starting label TESTMEM) for the command,

Text continued on page 360

Listing 1 continued:

```
E2E2                    29      KSTAT   EQU     0E2E2H                  ;keyboard status port
E3E3                    30      KDATA   EQU     0E3E3H                  ;keyboard data port
6E6E                    31      CSTAT   EQU     6E6EH                   ;Tarbell status port
6F6F                    32      CDATA   EQU     6F6FH                   ;Tarbell data port
F7FF                    33      STACKP  EQU     0F7FFH                  ;Stack address
0003                    34      CTLC    EQU     03H                     ;ascii ctl-c
0004                    35      CTLD    EQU     04H                     ;ascii ctl-d
0013                    36      CTLS    EQU     13H                     ;ascii ctl-s
0011                    37      CTLQ    EQU     11H                     ;ascii ctl-q
0000                    38      FALSE   EQU     0
00FF                    39      TRUE    EQU     0FFH
                        40 +1   $EJECT

MCS-86 MACRO ASSEMBLER  VID88


LOC  OBJ                LINE    SOURCE

                          41    ;
                          42    ;       ******************************************************
                          43    ;       *                                                    *
                          44    ;       *                  JUMP  TABLE                       *
                          45    ;       *                                                    *
                          46    ;       ******************************************************
                          47    ;
                          48    ;
F800 E80D90               49            JMP     INIT    ;RESETS STACK, SEGMENT REGISTERS, CASSETTE INTERFACE
                          50    ;                       ;ALSO PRINTS SIGN-ON MESSAGE
                          51    ;
F803 E83090               52            JMP     START   ;'WARM START'- REGISTERS NOT INITIALIZED
                          53    ;
F806 E91901               54            JMP     KEYSTAT ;RETURNS [AL]=0 IF NO KEYPRESS PENDING.  ELSE [AL]=0FFH
                          55    ;
F809 E9E000               56            JMP     CONIN   ;WAITS FOR KEYPRESS.  RETURNS [AL]=CHAR AND PRINTS IT.
                          57    ;
F80C E9CB04               58            JMP     VIDOUT  ;PRINTS CHAR IN AL ON CONSOLE
                          59    ;
                          60    ;
                          61    ;       ******************************************************
                          62    ;       *                                                    *
                          63    ;       *          I N I T I A L I Z A T I O N               *
                          64    ;       *                                                    *
                          65    ;       ******************************************************
                          66    ;
                          67    ;
F80F FC                   68    INIT:   CLD                             ;direction flag points 'up'
F810 FA                   69            CLI                             ;disable interrupts
F811 8CC8                 70            MOV     AX,CS                   ;initialize
F813 8ED8                 71            MOV     DS,AX                   ;  segment
F815 8EC0                 72            MOV     ES,AX                   ;  registers
F817 8ED0                 73            MOV     SS,AX                   ;  and set
F819 BCFFF7               74            MOV     SP,STACKP               ; stack pointer
F81C FB                   75            STI                             ;enable interrupts
F81D B010                 76            MOV     AL,10H                  ;Reset Cassette
F81F BA6E6E               77            MOV     DX,CSTAT
F822 EE                   78            OUT     DX,AL                   ;  Interface
F823 BAE0E0               79            MOV     DX,0E0E0H               ;Reset Video
F826 B088                 80            MOV     AL,88H                  ; Interface
F828 EE                   81            OUT     DX,AL                   ;Inverse video w/cursor
F829 C60652F400           82            MOV     BYTE PTR M[UCFLAG],0    ;0=lower case, FFH=U/C only
                          83
F82E BE5AF890             84            MOV     SI,OFFSET SIGNON        ;get sign on message
F832 E86301               85            CALL    PRINTMESS               ;and print it
                          86 +1   $EJECT

MCS-86 MACRO ASSEMBLER  VID88


LOC  OBJ                LINE    SOURCE

                          87    ;
                          88    ;       ******************************************************
                          89    ;       *                                                    *
                          90    ;       *          W O R K I N G   L O O P                   *
                          91    ;       *                                                    *
                          92    ;       ******************************************************
                          93    ;
F835 E83D01               94    START:  CALL    CRLF                    ;print CRLF
F838 B03E                 95            MOV     AL,'>'                  ;and prompt
F83A E89D04               96            CALL    VIDOUT
                          97    ;
F83D                      98    MAINLOOP:
F83D B400                 99            MOV     AH,0                    ;clear AH
F83F E8AA00              100            CALL    CONIN                   ;get a command
F842 3C41                101            CMP     AL,'A'                  ;check range for
F844 72EF                102            JB      START                   ;    A
F846 3C5A                103            CMP     AL,'Z'                  ;    thru
F848 7FEB                104            JG      START                   ;    Z
F84A 2C41                105            SUB     AL,'A'                  ;calculate offset
```

```
F84C D0E0                106             SHL     AL,1                    ;and multiply by 2
F84E 05B8F890            107             ADD     AX,OFFSET CTABLE
F852 8BD8                108             MOV     BX,AX
F854 8B07                109             MOV     AX,WORD PTR M[BX]
F856 FFD0                110             CALL    AX                      ;go do it
F858 EBDB                111             JMP     START                   ;start over
                         112 +1  $EJECT


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                 LINE    SOURCE

                         113     ;
                         114     ;       ****************************************
                         115     ;       *                                      *
                         116     ;       *          M E S S A G E S             *
                         117     ;       *                                      *
                         118     ;       ****************************************
                         119     ;
F85A 0C                  120     SIGNON  DB      0CH
F85B 38303838204D6F      121             DB      '8088 Monitor <rev. 0>'
     6E69746F72203C
     7265762E20303E
F870 00                  122     DBYTE   DB      0                               ;dummy byte
                         123     ;
F871 41444452204D20      124     COMHEAD DB      'ADDR M  T    DIFF
     20542020202044
     494646202020
F885 00                  125             DB      0
                         126     ;
F886 53554D20204449      127     MHEAD   DB      'SUM  DIFF'
     4646
F88F 00                  128             DB      0
                         129     ;
F890 53524320204D20      130     VHEAD   DB      'SRC  M   DEST M    DIFF'
     20204445535420
     4D202020204449
     4646
F8A7 00                  131             DB      0
                         132     ;
F8A8 4C454E47544820      133     CHEAD   DB      'LENGTH (HEX) = '
     28484558293D
     20
F8B7 00                  134             DB      0
                         135     ;
                         136 +1  $EJECT


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                 LINE    SOURCE

                         137     ;
                         138     ;       ************************************************
                         139     ;       *                                              *
                         140     ;       *       C O M M A N D  J U M P  T A B L E      *
                         141     ;       *                                              *
                         142     ;       ************************************************
                         143     ;
F8B8 B0FC                144     CTABLE  DW      AENTER  ;ENTER ASCII TEXT INTO MEMORY
F8BA A7F9                145             DW      ERR     ;B
F8BC D2FB                146             DW      COMPARE ;COMPARE CASSETTE INPUT WITH MEMORY
F8BE 00FB                147             DW      DUMP    ;DISPLAY MEMORY
F8C0 78FC                148             DW      ESUBST  ;ENTER HEX DATA INTO MEMORY
F8C2 7EFA                149             DW      FILL    ;FILL MEMORY WITH A CONSTANT
F8C4 4AFB                150             DW      GOTO    ;GO TO & EXECUTE A USER PROGRAM
F8C6 1AFC                151             DW      HEXMATH ;COMPUTE SUM AND DIFFERENCE OF HEX #'S
F8C8 2CFB                152             DW      INPUT   ;INPUT FROM A PORT
F8CA A7F9                153             DW      ERR     ;J
F8CC D1FC                154             DW      KTOGGLE ;TOGGLE KEYBOARD UPPER/LOWER CASE FLAG
F8CE A7F9                155             DW      ERR     ;L
F8D0 E7FA                156             DW      MOVE    ;MOVE MEMORY
F8D2 3BFC                157             DW      NTEST   ;NON DESTRUCTIVE MEMORY TEST
F8D4 3FFB                158             DW      OUTPUT  ;OUTPUT TO A PORT
F8D6 8FFB                159             DW      PUTSYNC ;OUTPUT CONTINUOUS SYNC STREAM TO CASSETTE
F8D8 A7F9                160             DW      ERR     ;Q
F8DA 82FB                161             DW      READ    ;READ FROM CASSETTE
F8DC A7F9                162             DW      ERR     ;S
F8DE A7F9                163             DW      ERR     ;T
F8E0 A7F9                164             DW      ERR     ;U
F8E2 8DFA                165             DW      VERIFY  ;VERIFY EQUALITY OF TWO MEMORY BLOCKS
F8E4 4FFB                166             DW      CWRITE  ;WRITE TO CASSETTE
F8E6 A7F9                167             DW      ERR     ;X
F8E8 A7F9                168             DW      ERR     ;Y
F8EA A7F9                169             DW      ERR     ;Z
                         170 +1  $EJECT
```

Listing 1 continued on page 350

Listing 1 continued:

```
MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                  LINE     SOURCE

                           171     ;
                           172     ;
                           173     ;       ************************************************
                           174     ;       *                                              *
                           175     ;       *        U T I L I T Y   R O U T I N E S       *
                           176     ;       *                  and                         *
                           177     ;       *     I / O   D E V I C E   H A N D L E R S    *
                           178     ;       *          (except  video  driver)             *
                           179     ;       *                                              *
                           180     ;       ************************************************
                           181     ;
                           182     ;
F8EC E82000                183     CONIN:  CALL    KEYIN           ;get a keyboard character
F8EF 50                    184             PUSH    AX
F8F0 A052F4                185             MOV     AL,BYTE PTR M[UCFLAG]   ;check for case conversion
F8F3 0AC0                  186             OR      AL,AL           ;0?
F8F5 7405                  187             JZ      CONNEXT         ;YES..no conversion
F8F7 58                    188             POP     AX              ;restore character
F8F8 E80900                189             CALL    UCCHEK          ;convert to UC
F8FB 50                    190             PUSH    AX
F8FC 58                    191     CONNEXT:POP     AX
F8FD E8DA03                192             CALL    VIDOUT          ;and echo it on console
F900 E80100                193             CALL    UCCHEK          ;always return UC
F903 C3                    194     KQUIT:  RET
                           195     ;
F904 3C61                  196     UCCHEK: CMP     AL,'a'
F906 7206                  197             JC      UQUIT
F908 3C7B                  198             CMP     AL,'z'+1
F90A 7302                  199             JNC     UQUIT
F90C 245F                  200             AND     AL,5FH
F90E C3                    201     UQUIT:  RET
                           202     ;
F90F 52                    203     KEYIN:  PUSH    DX              ;keyboard device handler
F910 BAE2E2                204             MOV     DX,KSTAT
F913 EC                    205     KEYLOOP:IN      AL,DX           ;check for keypress
F914 2480                  206             AND     AL,80H
F916 74FB                  207             JZ      KEYLOOP         ;no keypress..then wait for one
F918 5A                    208             POP     DX
F919 52                    209     KIN:    PUSH    DX
F91A BAE3E3                210             MOV     DX,KDATA
F91D EC                    211             IN      AL,DX           ;else get the character
F91E 247F                  212             AND     AL,7FH          ;and strip parity
F920 5A                    213             POP     DX
F921 C3                    214             RET
                           215     ;
F922                       216     KEYSTAT:                        ;RETURN [AL]=0 IF NO KEYPRESS ELSE [AL]=0FFH
F922 B400                  217             MOV     AH,FALSE        ;prepare for false
F924 52                    218             PUSH    DX
F925 BAE2E2                219             MOV     DX,KSTAT
F928 EC                    220             IN      AL,DX
F929 2480                  221             AND     AL,80H
F92B 7402                  222             JZ      KEXIT           ;return it if no keypress
F92D F6D4                  223             NOT     AH              ;otherwise make it TRUE
F92F 8AC4                  224     KEXIT:  MOV     AL,AH


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                  LINE     SOURCE

F931 5A                    225             POP     DX
F932 C3                    226             RET
                           227     ;
F933                       228     CTLCHEK:                        ;CHECK FOR CTL-S, CTL-Q AND CTL-C
F933 50                    229             PUSH    AX
F934 E8EBFF                230             CALL    KEYSTAT         ;keypress?
F937 3C00                  231             CMP     AL,0
F939 7418                  232             JZ      CTLEXIT         ;no keypress so return
F93B E8DBFF                233             CALL    KIN             ;if keypress then get the data
F93E 3C13                  234             CMP     AL,CTLS         ;check for ctl-s
F940 750D                  235             JNZ     CTLCCHEK        ;if not look for ctl-c
F942 E8CAFF                236     KWAIT:  CALL    KEYIN           ;if ctl-s then wait for another keypress
F945 3C11                  237             CMP     AL,CTLQ         ;is it ctl-q
F947 740A                  238             JZ      CTLEXIT         ;YES..return
F949 3C03                  239             CMP     AL,CTLC         ;abort?
F94B 745A                  240             JE      ERR             ;YES
F94D EBF3                  241             JMP     KWAIT           ;otherwise wait some more
F94F                       242     CTLCCHEK:
F94F 3C03                  243             CMP     AL,CTLC         ;is it ctl-c
F951 7454                  244             JZ      ERR             ;YES..ABORT!
F953                       245     CTLEXIT:
```

```
F953 58                  246             POP     AX
F954 C3                  247             RET
                         248     ;
F955                     249     CIN:                    ;GET BYTE FROM CASSETTE
F955 52                  250             PUSH    DX
F956 BA6E6E              251             MOV     DX,CSTAT
F959                     252     CINLOOP:
F959 EC                  253             IN      AL,DX
F95A 2410                254             AND     AL,10H          ;cassette ready to read?
F95C 75FB                255             JNZ     CINLOOP         ;NO..wait
F95E BA6F6F              256             MOV     DX,CDATA        ;YES..
F961 EC                  257             IN      AL,DX           ;get the data
F962 5A                  258             POP     DX
F963 C3                  259             RET
                         260     ;
F964                     261     COUT:                   ;WRITE A BYTE TO CASSETTE
F964 52                  262             PUSH    DX
F965 50                  263             PUSH    AX
F966 BA6E6E              264             MOV     DX,CSTAT
F969                     265     COUTLOOP:
F969 EC                  266             IN      AL,DX
F96A 2420                267             AND     AL,20H          ;cassette ready for write?
F96C 75FB                268             JNZ     COUTLOOP        ;NO..wait
F96E 58                  269             POP     AX              ;get char back
F96F BA6F6F              270             MOV     DX,CDATA
F972 EE                  271             OUT     DX,AL           ;and send to tape
F973 5A                  272             POP     DX
F974 C3                  273             RET
                         274     ;
F975 50                  275     CRLF:   PUSH    AX
F976 E8BAFF              276             CALL    CTLCHEK         ;CHECK FOR ABORT
F979 B00D                277             MOV     AL,CR           ;SEND CR AND LF TO CONSOLE
F97B E85C03              278             CALL    VIDOUT

MCS-86 MACRO ASSEMBLER    VID88

LOC  OBJ                 LINE    SOURCE

F97E B00A                279             MOV     AL,LF
F980 E85703              280             CALL    VIDOUT
F983 58                  281             POP     AX
F984 C3                  282             RET
                         283     ;
F985                     284     BLANK:                  ;PRINT A BLANK, SAVE ALL REG
F985 51                  285             PUSH    CX
F986 B90100              286             MOV     CX,1            ;print 1 blank
F989 E80200              287             CALL    TABS
F98C 59                  288             POP     CX
F98D C3                  289             RET
                         290     ;
F98E                     291     TABS:                   ;PRINT # BLANKS IN CX..ON EXIT CX=0
F98E 50                  292             PUSH    AX
F98F B020                293             MOV     AL,' '
F991 E84603              294     TLOOP:  CALL    VIDOUT
F994 E2FB                295             LOOP    TLOOP
F996 58                  296             POP     AX
F997 C3                  297             RET
                         298     ;
F998                     299     PRINTMESS:              ;PRINT THE MESSAGE <-- [SI] ON CONSOLE
F998 50                  300             PUSH    AX      ;END OF MESSAGE IS A ZERO (0)
F999 AC                  301     PMESS:  LODS    DBYTE           ;get a byte
F99A 3C00                302             CMP     AL,0            ;check for end of message
F99C 7407                303             JE      PQUIT           ;quit if zero
F99E 56                  304             PUSH    SI              ;otherwise save message pointer
F99F E83803              305             CALL    VIDOUT          ;and display byte
F9A2 5E                  306             POP     SI
F9A3 EBF4                307             JMP     PMESS           ;print more message
F9A5 58                  308     PQUIT:  POP     AX
F9A6 C3                  309             RET
                         310     ;
F9A7 B02A                311     ERR:    MOV     AL,'*'          ;print error
F9A9 E82E03              312             CALL    VIDOUT          ;  message
F9AC BCFFF7              313             MOV     SP,STACKP       ;reinitialize stack
F9AF E983FE              314             JMP     START           ;and abort!
                         315     ;
F9B2                     316     BINOUT:                 ;OUTPUT [AL] AS EIGHT BINARY DIGITS (BITS)
F9B2 51                  317             PUSH    CX
F9B3 B90800              318             MOV     CX,8
F9B6                     319     BINOUT1:
F9B6 D0E0                320             SHL     AL,1            ;get the bit
F9B8 7209                321             JB      BOUT1           ;output a 1
F9BA 50                  322             PUSH    AX              ;otherwise..
F9BB B030                323             MOV     AL,'0'          ;output
F9BD E81A03              324             CALL    VIDOUT          ;a 0
F9C0 EB0790              325             JMP     BINEND          ;continue
F9C3 50                  326     BOUT1:  PUSH    AX
F9C4 B031                327             MOV     AL,'1'          ;output a 1
F9C6 E81103              328             CALL    VIDOUT
```

Listing1 continued on page 352

Listing 1 continued:

```
F9C9 58                 329     BINEND: POP     AX
F9CA E2EA               330             LOOP    BINOUT1         ;do it eight times
F9CC 59                 331             POP     CX
F9CD C3                 332             RET


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                LINE    SOURCE

                        333     ;
F9CE                    334     HEXOUT:                 ;OUTPUT [AL] AS 2 HEX DIGITS. ALL REG SAVED.
F9CE 50                 335             PUSH    AX
F9CF 51                 336             PUSH    CX
F9D0 8AE0               337             MOV     AH,AL           ;save AL
F9D2 B104               338             MOV     CL,4
F9D4 D2E8               339             SHR     AL,CL           ;shift AL right 4 places
F9D6 59                 340             POP     CX
F9D7 E80700             341             CALL    HEXDIGOUT       ;output upper nibble
F9DA 8AC4               342             MOV     AL,AH           ;restore AL (now we do lower nibble)
F9DC E80200             343             CALL    HEXDIGOUT
F9DF 58                 344             POP     AX
F9E0 C3                 345             RET
                        346     ;
F9E1                    347     HEXDIGOUT:              ;CONVERT NIBBLE TO ASCII HEX
F9E1 240F               348             AND     AL,0FH          ;mask upper 4 bits
F9E3 0490               349             ADD     AL,90H          ;tricky conversion...
F9E5 27                 350             DAA                     ;     but
F9E6 1440               351             ADC     AL,40H          ;     it
F9E8 27                 352             DAA                     ;     works!
F9E9 E8EE02             353             CALL    VIDOUT          ;print the result
F9EC C3                 354             RET
                        355     ;
F9ED                    356     HEXCHK:                 ;CHECK AL FOR VALID HEX DIGIT;CONVERT TO BIN
F9ED 2C30               357             SUB     AL,'0'  ; IF INVALID RETURN WITH CARRY SET.
F9EF 720E               358             JB      HRET            ;Error..not alphanumeric
F9F1 3C0A               359             CMP     AL,0AH          ;check for 0-9
F9F3 F5                 360             CMC
F9F4 7309               361             JNB     HRET            ;return o.k. if 0-9
F9F6 2C07               362             SUB     AL,7            ;adjust for A-F
F9F8 3C0A               363             CMP     AL,10
F9FA 7203               364             JB      HRET            ;return error if > F
F9FC 3C10               365             CMP     AL,16
F9FE F5                 366             CMC
F9FF C3                 367     HRET:   RET
                        368     ;
FA00                    369     GETPARMB:       ;16 BIT HEX VALUE TO BX. BX IS SHIFT REGISTER, ACCEPTS LAST 4
                        370                     ;ON ENTRY CX EQUALS NUMBER OF KEYPRESSES THAT CAN BE ACCEPTED.
                        371                     ;ON EXIT AH CONTAINS TERMINATOR (I.E. CR, SPACE)
                        372                     ;UNLESS THE TERMINATOR IS INVALID (NOT EQUAL CR, SPACE OR ',')
                        373                     ;IN WHICH CASE AN ERROR IS GENERATED.
                        374     ;
FA00 BB0000             375             MOV     BX,0            ;clear BX
FA03 E8E6FE             376     LOOPB:  CALL    CONIN           ;get a character
FA06 3C30               377             CMP     AL,'0'          ;alphanumeric ?
FA08 7210               378             JB      BEXIT           ;NO...quit
FA0A 51                 379             PUSH    CX              ;YES...then
FA0B B104               380             MOV     CL,4            ;shift BX to
FA0D D3E3               381             SHL     BX,CL           ;make room for
FA0F 59                 382             POP     CX              ;latest addition
FA10 E8DAFF             383             CALL    HEXCHK          ;check for valid hex and convert to binary
FA13 7292               384             JB      ERR             ;if invalid then error!
FA15 02D8               385             ADD     BL,AL           ;otherwise add it in
FA17 E2EA               386             LOOP    LOOPB           ;keep looking


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                LINE    SOURCE

FA19 C3                 387             RET
FA1A 3C20               388     BEXIT:  CMP     AL,' '          ;test for blank
FA1C 740B               389             JE      BGOOD
FA1E 3C2C               390             CMP     AL,','          ;..comma
FA20 7407               391             JE      BGOOD
FA22 3C0D               392             CMP     AL,CR           ; or carriage return
FA24 7403               393             JE      BGOOD
FA26 E97EFF             394             JMP     ERR             ;if none of the above the ERROR
FA29 8AE0               395     BGOOD:  MOV     AH,AL           ;save terminator
FA2B C3                 396             RET
                        397     ;
FA2C                    398     GETPARMD:               ;16 BIT HEX VALUE TO DX. USE GETPARMB
FA2C 53                 399             PUSH    BX              ;save BX
FA2D E8D0FF             400             CALL    GETPARMB        ;get the parameter
FA30 8BD3               401             MOV     DX,BX           ;put it where it belongs
FA32 5B                 402             POP     BX              ;restore BX
FA33 C3                 403             RET
                        404     ;
```

```
FA34                    405     SETUP:                  ;GET PARMS IN BX AND DX. ALL PURPOSE PARAMETER GETTER.
FA34 51                 406             PUSH    CX              ;save CX
FA35 B9FFFF             407             MOV     CX,OFFFFH       ;allow  64K keypresses
FA38 E8C5FF             408             CALL    GETPARMB        ;get first parameter
FA3B 3C0D               409             CMP     AL,CR           ;check for carriage return
FA3D 7406               410             JE      SET1            ;if so [DX] defaults to [BX]
FA3F E8EAFF             411             CALL    GETPARMD        ;otherwise get second parameter
FA42 EB0390             412             JMP     SET2
FA45 8BD3               413     SET1:   MOV     DX,BX
FA47 59                 414     SET2:   POP     CX
FA48 C3                 415             RET
                        416     ;
FA49                    417     CLENGTH:                        ;[CX]<--[DX]-[BX]+1, IF[BX]>[DX] THEN ERR
FA49 52                 418             PUSH    DX
FA4A 3BD3               419             CMP     DX,BX           ;if [BX] > [DX]
FA4C 7303               420             JNB     CL1             ;then error!
FA4E E956FF             421             JMP     ERR
FA51 2BD3               422     CL1:    SUB     DX,BX           ;else determine difference
FA53 8BCA               423             MOV     CX,DX           ;and put in CX
FA55 41                 424             INC     CX              ;count = difference + 1
FA56 5A                 425             POP     DX
FA57 C3                 426             RET
                        427     ;
FA58                    428     GETPARMAL:              ;[AL]<-- ASCII HEX FROM CONSOLE
                        429                             ;[AL] UNCHANGED IF NO PARAMETER ENTERED
FA58 53                 430             PUSH    BX              ;save BX
FA59 51                 431             PUSH    CX              ;save CX
FA5A 52                 432             PUSH    DX              ;save DX
FA5B 8AD0               433             MOV     DL,AL           ;save AL
FA5D B9FFFF             434             MOV     CX,OFFFFH       ;64 keypresses allowed
FA60 E89DFF             435             CALL    GETPARMB        ;get the parameter
FA63 81F9FFFF           436             CMP     CX,OFFFFH       ;how many parameters entered?
FA67 7502               437             JNE     GQUIT           ;if greater than zero then continue
FA69 8ADA               438             MOV     BL,DL           ;if zero parms entered restore old value
FA6B 8AC3               439     GQUIT:  MOV     AL,BL           ;otherwise put it where it belongs
FA6D 5A                 440             POP     DX              ;restore DX


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                LINE    SOURCE

FA6E 59                 441             POP     CX              ;restore CX
FA6F 5B                 442             POP     BX              ;restore BX
FA70 C3                 443             RET
                        444     ;
FA71                    445     OUTBX:                  ;[BX] OUTPUT AS FOUR HEX DIGITS
FA71 50                 446             PUSH    AX
FA72 8AC7               447             MOV     AL,BH           ;output
FA74 E857FF             448             CALL    HEXOUT          ;  BH
FA77 8AC3               449             MOV     AL,BL           ; and
FA79 E852FF             450             CALL    HEXOUT          ;  BL
FA7C 58                 451             POP     AX
FA7D C3                 452             RET
                        453     ;
                        454 +1  $EJECT


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                LINE    SOURCE

                        455     ;
                        456     ;
                        457     ;
                        458     ;
                        459     ;   ************************************************
                        460     ;   *                                              *
                        461     ;   *       C O M M A N D  R O U T I N E S         *
                        462     ;   *                                              *
                        463     ;   ************************************************
                        464     ;
                        465     ;
FA7E                    466     FILL:                   ;FILL A BLOCK OF MEMORY WITH A CONSTANT
FA7E E8B3FF             467             CALL    SETUP           ;get start and end
FA81 E8C5FF             468             CALL    CLENGTH         ;compute the count
FA84 E8D1FF             469             CALL    GETPARMAL       ;and get the constant
FA87 8807               470     FLOOP:  MOV     M[BX],AL        ;...fill it...
FA89 43                 471             INC     BX
FA8A E2FB               472             LOOP    FLOOP
FA8C C3                 473             RET
                        474     ;
FA8D                    475     VERIFY:                 ;VERIFY EQUALITY OF TWO BLOCKS OF MEMORY
FA8D E8A4FF             476             CALL    SETUP           ;GET SOURCE START AND END
FA90 E8B6FF             477             CALL    CLENGTH         ;and compute the length
FA93 41                 478             INC     CX
```

Listing 1 continued on page 354

Listing 1 continued:

```
FA94 8BF3              479              MOV     SI,BX           ;save source in SI
FA96 51                480              PUSH    CX
FA97 B9FFFF            481              MOV     CX,OFFFFH       ;64K keypresses allowed
FA9A E863FF            482              CALL    GETPARMB        ;get the destination
FA9D 59                483              POP     CX
FA9E 8BFB              484              MOV     DI,BX           ;into DX
FAA0 E8D2FE            485              CALL    CRLF
FAA3 56                486              PUSH    SI              ;save source
FAA4 BE90F8            487              MOV     SI,OFFSET VHEAD
FAA7 E8EEFE            488              CALL    PRINTMESS       ;print header
FAAA 5E                489              POP     SI              ;restore source
FAAB                   490      VLOOP:
FAAB F3                491        REPE  CMPS    DBYTE,DBYTE     ;do it!
FAAC A6
FAAD 83F900            492              CMP     CX,0            ;all done?
FAB0 7501              493              JNE     VERR            ;NO...error
FAB2 C3                494              RET                     ; if done then return
                       495      ;
FAB3 8BDE              496      VERR:   MOV     BX,SI           ;get the source addr
FAB5 4B                497              DEC     BX              ;adjust it
FAB6 E8BCFE            498              CALL    CRLF
FAB9 E8B5FF            499              CALL    OUTBX           ;output the addr
FABC E8C6FE            500              CALL    BLANK
FABF 8A07              501              MOV     AL,M[BX]        ;get what's there
FAC1 8AE0              502              MOV     AH,AL           ;save it in AH
FAC3 E808FF            503              CALL    HEXOUT          ;output the data
FAC6 E8BCFE            504              CALL    BLANK
FAC9 E8B9FE            505              CALL    BLANK
FACC 8BDF              506              MOV     BX,DI           ;get the destination addr
FACE 4B                507              DEC     BX              ;adjust it
```

```
MCS-86 MACRO ASSEMBLER    VID88
```

```
LOC  OBJ               LINE     SOURCE

FACF E89FFF            508              CALL    OUTBX           ;display it
FAD2 8A07              509              MOV     AL,M[BX]        ;get the data
FAD4 E8AEFE            510              CALL    BLANK
FAD7 E8F4FE            511              CALL    HEXOUT          ;output the data
FADA E8A8FE            512              CALL    BLANK
FADD 32C4              513              XOR     AL,AH           ;determine bad bits
FADF E8D0FE            514              CALL    BINOUT          ;display in binary
FAE2 E84EFE            515              CALL    CTLCHEK         ;check for abort
FAE5 EBC4              516              JMP     VLOOP           ;continue
                       517      ;
FAE7                   518      MOVE:                   ;MOVE A BLOCK OF MEMORY
FAE7 E84AFF            519              CALL    SETUP           ;get start and end
FAEA 3C0D              520              CMP     AL,0DH          ;if not enough data
FAEC 7503              521              JNZ     M1
FAEE E9B6FE            522              JMP     ERR             ;then error!
FAF1 E855FF            523      M1:     CALL    CLENGTH         ;otherwise compute length
FAF4 53                524              PUSH    BX              ;save start address
FAF5 E83CFF            525              CALL    SETUP           ;and get destination
FAF8 8BFB              526              MOV     DI,BX           ;[DI] <-- destination
FAFA 5B                527              POP     BX
FAFB 8BF3              528              MOV     SI,BX           ;[SI] <-- source
FAFD F3                529       REP    MOVS    DBYTE,DBYTE     ;...move it...
FAFE A4
FAFF C3                530              RET
                       531      ;
FB00                   532      DUMP:                   ;DISPLAY MEMORY
FB00 E831FF            533              CALL    SETUP           ;get start and end
FB03 E843FF            534              CALL    CLENGTH         ;and compute length
FB06 E81900            535              CALL    NULINE2         ;set up console
FB09 8A07              536      DLOOP1: MOV     AL,M[BX]        ;get what's there
FB0B E8C0FE            537              CALL    HEXOUT          ;print it
FB0E E874FE            538              CALL    BLANK           ;and a blank
FB11 43                539              INC     BX
FB12 F6C30F            540              TEST    BL,0FH          ;test for 16 byte boundary
FB15 7503              541              JNZ     DNEXT           ;if not then continue
FB17 E80300            542              CALL    NULINE          ;otherwise set up console for new line
FB1A E2ED              543      DNEXT:  LOOP    DLOOP1          ;continue
FB1C C3                544              RET
                       545      ;
FB1D 83F901            546      NULINE: CMP     CX,1
FB20 7409              547              JE      NUQUIT
FB22                   548      NULINE2:
FB22 E850FE            549              CALL    CRLF            ;go to new line
FB25 E849FF            550              CALL    OUTBX           ;print address
FB28 E85AFE            551              CALL    BLANK           ;and a blank
FB2B C3                552      NUQUIT: RET
                       553      ;
FB2C                   554      INPUT:                  ;INPUT FROM A PORT
FB2C E805FF            555              CALL    SETUP           ;get port address
FB2F E843FE            556              CALL    CRLF
FB32 8BD3              557              MOV     DX,BX
FB34 EC                558              IN      AL,DX           ;read the port
FB35 E896FE            559              CALL    HEXOUT          ;print data in hex
FB38 E84AFE            560              CALL    BLANK           ;       and
```

```
MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                  LINE     SOURCE

FB3B E874FE                561             CALL    BINOUT          ;     binary
FB3E C3                    562             RET
                           563     ;
FB3F                       564     OUTPUT:                 ;OUTPUT TO A PORT
FB3F E8F2FE                565             CALL    SETUP           ;get address
FB42 8AC2                  566             MOV     AL,DL           ;and data
FB44 FEC8                  567             DEC     AL              ;adjust data
FB46 8BD3                  568             MOV     DX,BX
FB48 EE                    569             OUT     DX,AL           ;output data
FB49 C3                    570             RET
                           571     ;
FB4A                       572     GOTO:                   ;EXECUTE A PROGRAM
FB4A E8E7FE                573             CALL    SETUP           ;get the address
FB4D FFE3                  574             JMP     BX              ;GO!!
                           575     ;
FB4F                       576     CWRITE:                 ;WRITE TO CASSETTE
FB4F E8E2FE                577             CALL    SETUP           ;get the range
FB52 E8F4FE                578             CALL    CLENGTH         ;compute the length
FB55 E81DFE                579             CALL    CRLF
FB58 E85500                580             CALL    CPROMPT
FB5B E80F00                581             CALL    CSTART
FB5E E85600                582             CALL    LENGTHOUT       ;tell length
FB61 8A07                  583     CLOOP:  MOV     AL,M[BX]        ;get a byte
FB63 E8FEFD                584             CALL    COUT            ;output
FB66 43                    585             INC     BX              ;next byte
FB67 E8C9FD                586             CALL    CTLCHEK         ;check for abort
FB6A E2F5                  587             LOOP    CLOOP           ;continue
FB6C C3                    588             RET
                           589     ;
FB6D B03C                  590     CSTART: MOV     AL,3CH          ;start byte
FB6F E8F2FD                591             CALL    COUT
FB72 B0E6                  592             MOV     AL,0E6H         ;sync byte
FB74 E8EDFD                593             CALL    COUT
FB77 8AC5                  594             MOV     AL,CH           ;high length
FB79 E8E8FD                595             CALL    COUT
FB7C 8AC1                  596             MOV     AL,CL           ;low length
FB7E E8E3FD                597             CALL    COUT
FB81 C3                    598             RET
                           599     ;
FB82                       600     READ:                   ;READ FROM CASSETTE
FB82 E8AFFE                601             CALL    SETUP           ;get address
FB85 E8EDFD                602             CALL    CRLF
FB88 E82500                603             CALL    CPROMPT
FB8B E80F00                604             CALL    READINIT
FB8E E82600                605             CALL    LENGTHOUT       ;prompt when reading
FB91 E8C1FD                606     RLOOP:  CALL    CIN             ;get a byte
FB94 8807                  607             MOV     M[BX],AL
FB96 43                    608             INC     BX              ;next byte
FB97 E899FD                609             CALL    CTLCHEK         ;check for abort
FB9A E2F5                  610             LOOP    RLOOP           ;continue
FB9C C3                    611             RET
                           612     ;
FB9D                       613     READINIT:
FB9D B010                  614             MOV     AL,10H          ;reset interface


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                  LINE     SOURCE

FB9F 52                    615             PUSH    DX
FBA0 BA6E6E                616             MOV     DX,CSTAT
FBA3 EE                    617             OUT     DX,AL
FBA4 5A                    618             POP     DX
FBA5 E8ADFD                619             CALL    CIN
FBA8 8AE8                  620             MOV     CH,AL           ;get high length
FBAA E8A8FD                621             CALL    CIN
FBAD 8AC8                  622             MOV     CL,AL           ;and low length
FBAF C3                    623             RET
                           624     ;
FBB0                       625     CPROMPT:                ;CASSETTE PROMPT
FBB0 BEA8F8                626             MOV     SI, OFFSET CHEAD
FBB3 E8E2FD                627             CALL    PRINTMESS
FBB6 C3                    628             RET
                           629     ;
FBB7                       630     LENGTHOUT:              ;OUTPUT RECORD LENGTH
FBB7 53                    631             PUSH    BX
FBB8 8BD9                  632             MOV     BX,CX           ;get the count
FBBA E8B4FE                633             CALL    OUTBX           ;output it
FBBD 5B                    634             POP     BX
FBBE C3                    635             RET
```

Listing 1 continued on page 356

Listing 1 continued:

```
                        636     ;
FBBF                    637     PUTSYNC:                        ;SEND SYNC STREAM TO CASSETTE
FBBF E8B3FD             638             CALL    CRLF
FBC2                    639     SYNCLOOP:
FBC2 B0E6               640             MOV     AL,0E6H         ;sync character
FBC4 E89DFD             641             CALL    COUT            ;send it
FBC7 E858FD             642             CALL    KEYSTAT         ;check for keypress
FBCA 3C00               643             CMP     AL,0            ;zero = no keypress
FBCC 74F4               644             JE      SYNCLOOP        ;so continue
FBCE E848FD             645             CALL    KIN             ;ignore the keypress
FBD1 C3                 646             RET                     ;and quit
                        647     ;
FBD2                    648     COMPARE:                        ;COMPARE INPUT FROM CASSETTE WITH MEMORY
FBD2 E85FFE             649             CALL    SETUP
FBD5 E89DFD             650             CALL    CRLF
FBD8 BE71F8             651             MOV     SI, OFFSET COMHEAD      ;print header
FBDB E8BAFD             652             CALL    PRINTMESS
FBDE E8A4FD             653             CALL    BLANK
FBE1 E8CCFF             654             CALL    CPROMPT
FBE4 E8B6FF             655             CALL    READINIT
FBE7 E8CDFF             656             CALL    LENGTHOUT
FBEA                    657     COMLOOP:
FBEA E868FD             658             CALL    CIN             ;get char from cassette
FBED 3A07               659             CMP     AL,M[BX]        ;compare with memory
FBEF 7507               660             JNE     COMERR          ;not equal!! error
FBF1 43                 661     COM1:   INC     BX              ;if equal
FBF2 E83EFD             662             CALL    CTLCHEK         ;check for abort
FBF5 E2F3               663             LOOP    COMLOOP         ;then continue checking
FBF7 C3                 664             RET
FBF8 50                 665     COMERR: PUSH    AX
FBF9 E879FD             666             CALL    CRLF
FBFC E872FE             667             CALL    OUTBX           ;if error..output memory address
FBFF E883FD             668             CALL    BLANK
```

```
MCS-86 MACRO ASSEMBLER    VID88

LOC  OBJ                LINE    SOURCE

FC02 8A07               669             MOV     AL,M[BX]        ;get memory data
FC04 8AF0               670             MOV     DH,AL           ;save it too
FC06 E8C5FD             671             CALL    HEXOUT          ;output what's in memory
FC09 E879FD             672             CALL    BLANK
FC0C 58                 673             POP     AX              ;restore cassette data
FC0D E8BEFD             674             CALL    HEXOUT          ;output it
FC10 E872FD             675             CALL    BLANK
FC13 32C6               676             XOR     AL,DH           ;determine bad bits
FC15 E89AFD             677             CALL    BINOUT          ;and print in binary
FC18 EBD7               678             JMP     COM1            ;continue
                        679     ;
FC1A                    680     HEXMATH:                        ;COMPUTE SUM AND DIFFERENCE OF TWO HEX #'S
FC1A E817FE             681             CALL    SETUP           ;get the numbers
FC1D 53                 682             PUSH    BX              ;save
FC1E 52                 683             PUSH    DX              ; them
FC1F E853FD             684             CALL    CRLF
FC22 BE86F8             685             MOV     SI, OFFSET MHEAD
FC25 E870FD             686             CALL    PRINTMESS       ;print the header
FC28 E84AFD             687             CALL    CRLF
FC2B 03DA               688             ADD     BX,DX           ;sum
FC2D E841FE             689             CALL    OUTBX
FC30 E852FD             690             CALL    BLANK
FC33 5A                 691             POP     DX              ;restore
FC34 5B                 692             POP     BX              ; numbers
FC35 2BDA               693             SUB     BX,DX           ;difference
FC37 E837FE             694             CALL    OUTBX
FC3A C3                 695             RET
                        696     ;
FC3B                    697     NTEST:                  ;MEMORY TEST
FC3B E8F6FD             698             CALL    SETUP           ;get start and end
FC3E E808FE             699             CALL    CLENGTH         ;compute length
FC41 E831FD             700             CALL    CRLF
FC44 53                 701     MTEST1: PUSH    BX
FC45 51                 702             PUSH    CX
FC46 8A07               703     MTLOOP: MOV     AL,M[BX]        ;get what's there
FC48 8AE0               704             MOV     AH,AL           ;save it
FC4A F6D0               705             NOT     AL              ;complement
FC4C 8807               706             MOV     M[BX],AL        ;and store it back
FC4E 8A07               707             MOV     AL,M[BX]        ;read it again
FC50 F6D0               708             NOT     AL              ;re-complement
FC52 3AC4               709             CMP     AL,AH           ;is it o.k.?
FC54 750C               710             JNE     SHORT   TERR    ;if not then error!
FC56 8827               711             MOV     M[BX],AH        ;restore previous value
FC58 43                 712     TNEXT:  INC     BX              ;next location
FC59 E8D7FC             713             CALL    CTLCHEK         ;check for abort
FC5C E2E8               714             LOOP    MTLOOP          ;continue
FC5E 59                 715             POP     CX
FC5F 5B                 716             POP     BX
FC60 EBE2               717             JMP     MTEST1          ;test forever
                        718     ;
```

```
FC62 E810FD              719    TERR:   CALL    CRLF            ;TELL USER ABOUT BAD MEMORY
FC65 E809FE              720            CALL    OUTBX           ;output bad address
FC68 E81AFD              721            CALL    BLANK           ;and a blank
FC6B 32C4                722            XOR     AL,AH           ;tell user which


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                 LINE     SOURCE

FC6D E85EFD               723             CALL    HEXOUT          ;bits are bad in hex...
FC70 E812FD               724             CALL    BLANK
FC73 E83CFD               725             CALL    BINOUT          ;and binary
FC76 EBE0                 726             JMP     TNEXT           ; continue
                          727     ;
FC78                      728     ESUBST:                         ;SUBSTITUTE MEMORY WITH HEX DATA
FC78 E8B9FD               729             CALL    SETUP           ;get address
FC7B                      730     NUSLOOP:
FC7B E8F7FC               731             CALL    CRLF            ;and
FC7E E8F0FD               732             CALL    OUTBX           ;print it
FC81 B90800               733             MOV     CX,8            ;8 entries per line
FC84 E8FEFC               734     SLOOP:  CALL    BLANK
FC87 8A07                 735             MOV     AL,M[BX]        ;get what's there
FC89 E842FD               736             CALL    HEXOUT          ;and print it
FC8C 50                   737             PUSH    AX              ;save it
FC8D B02D                 738             MOV     AL,'-'          ;with a prompt
FC8F E84800               739             CALL    VIDOUT
FC92 58                   740             POP     AX              ;restore it
FC93 E8C2FD               741             CALL    GETPARMAL       ;get new data
FC96 EB0B90               742             JMP     QTEST           ;check for quit
FC99 8807                 743     SNEXT:  MOV     M[BX],AL        ;otherwise, put new data in memory
FC9B 43                   744             INC     BX              ;and continue
FC9C E2E6                 745             LOOP    SLOOP
FC9E EBDB                 746             JMP     NUSLOOP
FCA0 80FC20               747     QTEST:  CMP     AH,' '          ;if blank then
FCA3 74F4                 748             JE      SNEXT           ;continue
FCA5 80FC0D               749             CMP     AH,0DH          ;if carraige return
FCA8 7403                 750             JE      Q1              ;then we are done
FCAA E9FAFC               751             JMP     ERR             ;otherwise..error!
FCAD 8807                 752     Q1:     MOV     M[BX],AL        ;save that last one!
FCAF C3                   753             RET
                          754     ;
FCB0                      755     AENTER:                         ;ENTER ASCII TEXT IN MEMORY
FCB0 B9FFFF               756             MOV     CX,0FFFFH       ;64K keypresses
FCB3 E84AFD               757             CALL    GETPARMB        ;get the entry address
FCB6 E8BCFC               758             CALL    CRLF
FCB9 E830FC               759     ELOOP:  CALL    CONIN
FCBC 3C04                 760             CMP     AL,CTLD         ;done?
FCBE 7405                 761             JE      EEXIT           ;YES
FCC0 8807                 762             MOV     M[BX],AL        ;NO..put data in memory
FCC2 43                   763             INC     BX
FCC3 EBF4                 764             JMP     ELOOP
FCC5 E8ADFC               765     EEXIT:  CALL    CRLF
FCC8 B040                 766             MOV     AL,'@'
FCCA E80D00               767             CALL    VIDOUT
FCCD E8A1FD               768             CALL    OUTBX           ;output the ending address
FCD0 C3                   769             RET
                          770     ;
FCD1                      771     KTOGGLE:                        ;TOGGLE THE UPPER/LOWER CASE FLAG
FCD1 A052F4               772             MOV     AL,BYTE PTR M[UCFLAG]   ;get the flag
FCD4 F6D0                 773             NOT     AL                      ;toggle
FCD6 A252F4               774             MOV     BYTE PTR M[UCFLAG],AL   ;put flag back
FCD9 C3                   775             RET
                          776     ;


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                 LINE     SOURCE

                          777 +1  $EJECT


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                 LINE     SOURCE

                          778     ;
                          779     ;
                          780     ;
                          781     ;       ************************************************
                          782     ;       *                                              *
                          783     ;       *              V I D E O   D R I V E R         *
                          784     ;       *                                              *
```

Listing 1 continued on page 358

Listing 1 continued:

```
                        785     ;       *                                               *
                        786     ;       *       DRIVES  TDL  VDB  VIDEO  INTERFACE      *
                        787     ;       *                                               *
                        788     ;       *    converted from 8080 Assembler with CONV-86 *
                        789     ;       *                                               *
                        790     ;       ************************************************
                        791     ;
                        792     ;
                        793     ;       VIDEO DRIVER
                        794     ;
FCDA 50                 795     VIDOUT: PUSH    AX
FCDB 56                 796             PUSH    SI
FCDC 57                 797             PUSH    DI
FCDD E80400             798             CALL    VIDEO
FCE0 5F                 799             POP     DI
FCE1 5E                 800             POP     SI
FCE2 58                 801             POP     AX
FCE3 C3                 802             RET
                        803     ;
                        804     ;******** CONVERTED CODE BEGINS HERE ********
                        805     ;
                        806     ;VDB DRIVER
  00E1                  807     VD      EQU     0E1H
  00E0                  808     VC      EQU     0E0H
  00E0                  809     XRD     EQU     0E0H
  00E1                  810     YRD     EQU     0E1H
  00C0                  811     YWR     EQU     0C0H
  00E2                  812     MRD     EQU     0E2H
  0080                  813     MWR     EQU     80H
  0088                  814     VMODE   EQU     88H
  0098                  815     BMODE   EQU     98H
                        816     ;
                        817     ;
FCE4 53                 818     VIDEO:  PUSH    BX
FCE5 8B1E50F4           819             MOV     BX,WORD PTR M[XY]
FCE9 247F               820             AND     AL,7FH
FCEB 7403               821             JZ      SHORT L_2
FCED E80600             822             CALL    VOUT
FCF0                    823     L_2:
FCF0 891E50F4           824             MOV     WORD PTR M[XY],BX
FCF4 5B                 825             POP     BX
FCF5 C3                 826             RET
                        827     ;
FCF6 3C20               828     VOUT:   CMP     AL,20H
FCF8 7303               829             JAE     SHORT L_3
FCFA EB7490             830             JMP     CNTL
FCFD                    831     L_3:


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ                LINE    SOURCE

FCFD 3C7F               832             CMP     AL,7FH
FCFF 7501               833             JNZ     SHORT L_4
FD01 C3                 834             RET
FD02                    835     L_4:
FD02 E6E1               836             OUT     VD,AL
FD04 FECF               837             DEC     BH
FD06 7401               838             JZ      SHORT L_5
FD08 C3                 839             RET
FD09                    840     L_5:
FD09 B750               841             MOV     BH,80
FD0B FECB               842             DEC     BL
FD0D 7401               843             JZ      SHORT L_6
FD0F C3                 844             RET
FD10                    845     L_6:
FD10 FEC3               846     VO2:    INC     BL
                        847     ;
FD12 53                 848     SCROLL: PUSH    BX
FD13 52                 849             PUSH    DX
FD14 51                 850             PUSH    CX
FD15 B098               851             MOV     AL,BMODE
FD17 E6E0               852             OUT     VC,AL
FD19 32C0               853             XOR     AL,AL
FD1B E6E0               854             OUT     VC,AL
FD1D BA50C1             855             MOV     DX,0C150H
FD20 8AC6               856             MOV     AL,DH
FD22 E6E0               857     S1:     OUT     VC,AL
FD24 8AEA               858             MOV     CH,DL
FD26 BB00F4             859             MOV     BX,VIDBUF
FD29 E4E1               860     L1:     IN      AL,VD
FD2B 8807               861             MOV     M[BX],AL
FD2D 9F                 862             LAHF
FD2E 43                 863             INC     BX
FD2F 9E                 864             SAHF
FD30 FECD               865             DEC     CH
FD32 75F5               866             JNZ     L1
FD34 8AC6               867             MOV     AL,DH
```

```
FD36 FEC8          868              DEC     AL
FD38 E6E0          869              OUT     VC,AL
FD3A BB00F4        870              MOV     BX,VIDBUF
FD3D 8AEA          871              MOV     CH,DL
FD3F 8A07          872      L2:     MOV     AL,[BX]
FD41 E6E1          873              OUT     VD,AL
FD43 9F            874              LAHF
FD44 43            875              INC     BX
FD45 9E            876              SAHF
FD46 FECD          877              DEC     CH
FD48 75F5          878              JNZ     L2
FD4A FEC6          879              INC     DH
FD4C 8AC6          880              MOV     AL,DH
FD4E 3CD9          881              CMP     AL,0D9H
FD50 72D0          882              JB      S1
FD52 8AEA          883              MOV     CH,DL
FD54 B020          884              MOV     AL,20H
FD56 E6E1          885      S2:     OUT     VD,AL

MCS-86 MACRO ASSEMBLER    VID88

LOC  OBJ             LINE     SOURCE

FD58 FECD          886              DEC     CH
FD5A 75FA          887              JNZ     S2
FD5C 59            888              POP     CX
FD5D 5A            889              POP     DX
FD5E 5B            890              POP     BX
FD5F B088          891      SETCAV: MOV     AL,VMODE
FD61 E6E0          892              OUT     VC,AL
FD63 B050          893      SETCUR: MOV     AL,80
FD65 2AC7          894              SUB     AL,BH
FD67 E6E0          895              OUT     VC,AL
FD69 B0D9          896              MOV     AL,25+0C0H
FD6B 2AC3          897              SUB     AL,BL
FD6D E6E0          898              OUT     VC,AL
FD6F C3            899              RET
                   900      ;
FD70 3C0D          901      CNTL:   CMP     AL,CR
FD72 7422          902              JZ      SHORT CCR
FD74 3C0A          903              CMP     AL,LF
FD76 7415          904              JZ      SHORT CLF
FD78 3C0C          905              CMP     AL,FF
FD7A 741E          906              JZ      SHORT CFF
FD7C 3C08          907              CMP     AL,BS
FD7E 7401          908              JZ      SHORT CBS
FD80 C3            909              RET
FD81 B04F          910      CBS:    MOV     AL,79
FD83 2AC7          911              SUB     AL,BH
FD85 7901          912              JNS     SHORT L_8
FD87 C3            913              RET
FD88               914      L_8:
FD88 E6E0          915              OUT     VC,AL
FD8A FEC7          916              INC     BH
FD8C C3            917              RET
FD8D FECB          918      CLF:    DEC     BL
FD8F 7503          919              JNZ     SHORT L_9
FD91 E97CFF        920              JMP     VD2
FD94               921      L_9:
FD94 EBCD          922              JMP     SETCUR
FD96 B750          923      CCR:    MOV     BH,80
FD98 EBC9          924              JMP     SETCUR
FD9A B098          925      CFF:    MOV     AL,BMODE
FD9C E6E0          926              OUT     VC,AL
FD9E BBD007        927              MOV     BX,25*80
FDA1 32C0          928      CFF1:   XOR     AL,AL
FDA3 E6E1          929              OUT     VD,AL
FDA5 9F            930              LAHF
FDA6 4B            931              DEC     BX
FDA7 9E            932              SAHF
FDA8 8AC7          933              MOV     AL,BH
FDAA 0AC3          934              OR      AL,BL
FDAC 75F3          935              JNZ     CFF1
FDAE BB1950        936              MOV     BX,256*80+25
FDB1 EBAC          937              JMP     SETCAV
                   938      ;
----               939      ABS_0   ENDS


MCS-86 MACRO ASSEMBLER    VID88


LOC  OBJ             LINE     SOURCE

  F80F               940              END     INIT

ASSEMBLY COMPLETE, NO ERRORS FOUND
```


Circle 274 on inquiry card.

MARK GORDON COMPUTERS

DIVISION OF MARK GORDON ASSOCIATES, INC.

P.O. BOX 77, CHARLESTOWN, MASSACHUSETTS 02129
(617) 242-2749 (617) 491-7505

SD SYSTEMS COMPUTER KITS

★ EXPANDORAM I (No RAMS) 169.00
★ VERSAFLOPPY CONTROLLER I .. 189.00
★ SBC-100 Single Board Kit 239.00
★ Z80 Starter 269.00

OTHER SPECIALS

★ 16K Memory Kit 49.00
★ CAT Modem 151.00
★ Leedex Monitor 109.00
★ Atari 400 ..... 499.00
★ Atari 800 ..... 779.00
★ Hazeltine 1410 ..... 699.00

To Order Call Toll-Free 1-800-343-5206

ORDERING INFORMATION

We accept Visa and Mastercharge. We will ship C.O.D. certified check or money order only. Massachusetts residents add 5 percent sales tax.

The Company cannot be liable for pictorial or typographical inaccuracies.

ATTENTION COMMODORE DISK OWNERS

Never sort another disk file!

With Creative Software's ISAM file handling routine, your files are always maintained in sorted order. 2K bytes of assembly language subroutines allow you to:

- **CREATE** a new ISAM file
- **OPEN** an existing file
- **READ** key and data from file
- **WRITE** key and data to file
- **READNEXT** key and data from file
- **DELETE** key and data from file
- **CLOSE** file
- **SUPPORTS** up to 5 open ISAM files simultaneously

Available for 16K or 32K CBM computers and 2040 disk units

$99.95 + $2.50 shipping

Soon to be available for CBM 8016 and 8032 computers with 8050 disk drive. Manual available separately for $15.00

Creative Software

P.O. BOX 4030, MOUNTAIN VIEW, CA 94040

Circle 275 on inquiry card.

Text continued from page 347:
followed by a RET (return) statement. Then replace:

```
F8DE    DW    ERR
```

with

```
F8DE    DW    TESTMEM
```

Notes on Performance

How does the 8088 stack up in performance versus the popular 8-bit processors of the 1970s? To answer this question, we must develop at least a rough definition of what we mean by performance.

To evaluate performance I use three criteria:

- the execution speed for a set of applications,
- the amount of memory required to implement the applications, and
- the amount of software-development effort required for application implementation (as measured by lines of assembly-language code).

An appropriate set of applications will include a mix of mathematics, data-handling and process-control-type programs. In addition, both execution-bound (eg: heavy calculation) and bus-bound (eg: bubble sort) applications should be included.

This article is not meant to be a full-fledged benchmark report. Nevertheless, using my own background, manufacturer's documentation, and other sources, I have come to the following conclusions concerning the 5 MHz 8088, which on the average:

- is 1.5 to 5 times faster than the *fastest* versions of other popular 8-bit machines (ie: Z80B, 68B09, 6800, 8080A, etc),
- will typically require only 50% to 75% of the memory devoted to code by these other machines for a set of applications, and
- requires substantially less (as little as 50% or less) lines of code to implement a benchmark than these other machines.

Execution speed is the most visible measure of performance. Factors which contribute to the 8088's superiority are:

- *The high standard clock rate:* The standard 8088 runs at 5 MHz (in fact, possibly faster if you're willing to experiment). Intel claims that, next year, specially selected 8 MHz 8088s will be available. If 5 MHz 8088s are fast, 8 MHz 8088s will be *unreal*.
- *The pipelined architecture:* This architecture allows overlapped instruction fetch and execution, eliminating a traditional performance limitation present in other 8-bit machines.
- *The 16-bit internal data paths:* These enhance data movement and manipulation capability.
- *Its rich set of arithmetic instructions:* Math-oriented applications are served exceptionally well by the 8088. The 5 MHz 8088 can do most 16-bit integer math (add, subtract, multiply, divide) faster than a 9511 hardware math chip.
- *Powerful addressing modes*: The 8088 allows up to four address components to be used in calculating an absolute physical memory address. In addition, most instructions can operate *directly on a memory location*, eliminating the traditional accumulator bottlenck found in other machines.

The amount of memory required can have significant cost ramifications for an application. Here again, the 16-bit internal organization and powerful addressing modes of the 8088 reduce memory requirements. In extreme cases (heavily word- or math-oriented) the 8088 can implement applications in as little as 20% to 30% of the memory of other 8-bit machines.

The number of lines of code required to implement an application becomes more and more of an issue each day. For instance, the Department of Defense states that one line of debugged, documented code now costs close to $60. Programming costs continue to rise, while productivity remains relatively fixed. This suggests a real "software crisis" in the 1980s.

The 8088 can require as little as 50% (average perhaps 75%) of the lines of code as compared to other 8-bit machines. This is because one assembly-language instruction can generate up to 6 bytes of code, and the instructions implemented are very powerful relative to other popular microprocessors.

A summary chart of my findings is shown in figure 3. The relative performance of the 8088 (5 MHz), 6809 (2 MHz) and Z80A (4 MHz) are shown, with an 8086 (true 16-bit machine) thrown in for reference. A differentiation between *word-* or *bus*-oriented and *byte-* or *execution*-oriented applications must be made here. Note that the bus-oriented versus execution-oriented differentiation does not apply to nonpipelined machines like the Z80A or 6809. The byte-orientation versus word-orientation differentiation *does* affect the performance of these machines.

Full-speed memories are assumed as shown below:

	Processor	*Access Time (approximately)*
5 MHz	8088, 8086	480 ns
2 MHz	6809	320 ns
4 MHz	Z80A	250 ns

As shown above, the 8088 can function at maximum speed but still use slower memory than the other microprocessors. In many cases (especially EPROMs), slower-memory-speed selected parts have much lower prices than faster selections.

Essentially, the 8088 has from 1.5 to 2.5 times the performance of the fastest 8-bit competition. Of course, the performance improvement over older 8-bit processors (ie: 6800s, 8080As, etc) is even higher.

Finale

In the text box on pages 344 thru 346 you will find a full description of each MON88 command. A complete listing of the monitor program is given in listing 1.

The 8088 is not only the highest performance 8-bit processor available, but represents a "bridge" to the new architectures of the 1980s. I hope that you have found the 8088 project as challenging, educating and rewarding as I have. Welcome to the future!■

Add Macro Expansion to Your Microcomputer

Part 2

David C Brown
1704 Manor Rd
Havertown PA 19083

Last month, I discussed the definition and use of the macro instruction and detailed a set of requirements for a macro processor. Part 1 also gave an overview in the form of text and flowcharts of how this macro processor would operate. Figures 1 thru 11 provide a more detailed flowchart of these processes and roughly correspond to the overview flowcharts in figure 1 of Part 1 of this article (October 1980 BYTE, page 162). Frequent reference should be made back to these overview flowcharts when reading the detailed flowcharts of figures 1 thru 11. A glossary of terms appears on page 371.

This completes the explanation of the macro definition and expansion. In the rest of the article I will discuss the interface of the macro processor to an assembler, as well as possible enhancements.

Alternate Implementation Approaches

The last hurdle to clear is how to tie this macro facility into your assembler. Basically, there are two ways this can be done, *preprocessor* or *in-line*. The approach used depends upon your situation.

The simplest way to use your macro processor is as a preprocessor. This can be done in two ways. In the first way, the macro processor is a separate program, reading your source program and writing an output file of expanded code to cassette, paper tape, floppy disk, etc; it is this output file that is read into the assembler instead of the original source. While this is the easiest way to use the preprocessor, it is also the worst from the viewpoint of efficiency, requiring an intermediate file and a longer run time. However, if you cannot modify the assembler itself, this may be the only approach you can take.

A second, more efficient, preprocessor approach is to locate the read routine in the assembler and replace it

Listing 1: *Example of keyword parameters. A change that can be made in the macro assembler involves the use of keyword parameters. These allow the user to specify variable symbol values in any order or by default. The macro definition for MOVE is given in listing 1a; two examples of a macro call and its resulting code are given in listings 1b and 1c. In listing 1b, both &TO and &FROM are assigned the default values given in the prototype statement of the macro definition. In listing 1c, the value for &FROM is specified by default. Note the absence of the ampersand in naming variable symbols within the macro call.*

```
(1a)
 1.          MACRO
 2.  &JUMP   MOVE    &TO=FIELDB,&FROM=FIELDA,&LENGTH=
 3.          LXI     B,&TO
 4.          LXI     D,&FROM
 5.          MVI     H,&LENGTH
 6.  &JUMP   LDAX    D
 7.          STAX    B
 8.          INX     B
 9.          INX     D
10.          DCR     H
11.          JNZ     &JUMP
12.          MEND

(1b)  LOOP   MOVE    LENGTH=10

             LXI     B,FIELDB
             LXI     D,FIELDA
             MVI     H,10
      LOOP   LDAX    D
             STAX    B
             INX     B
             INX     D
             DCR     H
             JNZ     LOOP

(1c)  LOOP   MOVE    LENGTH=9,TO=NEW

             LXI     B,NEW
             LXI     D,FIELDA
             MVI     H,9
      LOOP   LDAX    D
             STAX    B
             INX     B
             INX     D
             DCR     H
             JNZ     LOOP
```

with a call to the macro processor. This is the direction taken in my flowcharts since it is a compromise between a separate program and making major revisions to the assembler.

Replacing the read routine is not as easy as it sounds, however. Microprocessor assemblers typically use character assembly rather than line assembly. They read the source statement one character at a time and process each character as it is read rather than reading an entire source statement and having the whole statement available to work on. My flowcharts are designed for line assembly in that a model statement is completely expanded before it is passed to the assembler.

If your assembler uses character-assembly processing, it will call the macro processor for each character. This will require the read routine to expand the model statement on the first call and pass it one character at a time to the assembler on successive calls until it is completely transferred, at which point the read routine will expand the next model statement. You can also modify the model-expansion routines to pass the statement a character at a time directly from the expansion routines, but this is a little more difficult.

The worst drawback of either preprocessor approach is that every operation code is looked up twice, once by the macro processor to check for macro calls and once by the normal assembler. This is quite time-consuming. Perhaps the most efficient way to incorporate macro processing is to put the macro processing in-line with the assembler's operation-code-lookup and read routines. This requires

Text continued on page 366

The worst drawback of the preprocessor approach is that every operation code is looked up twice.


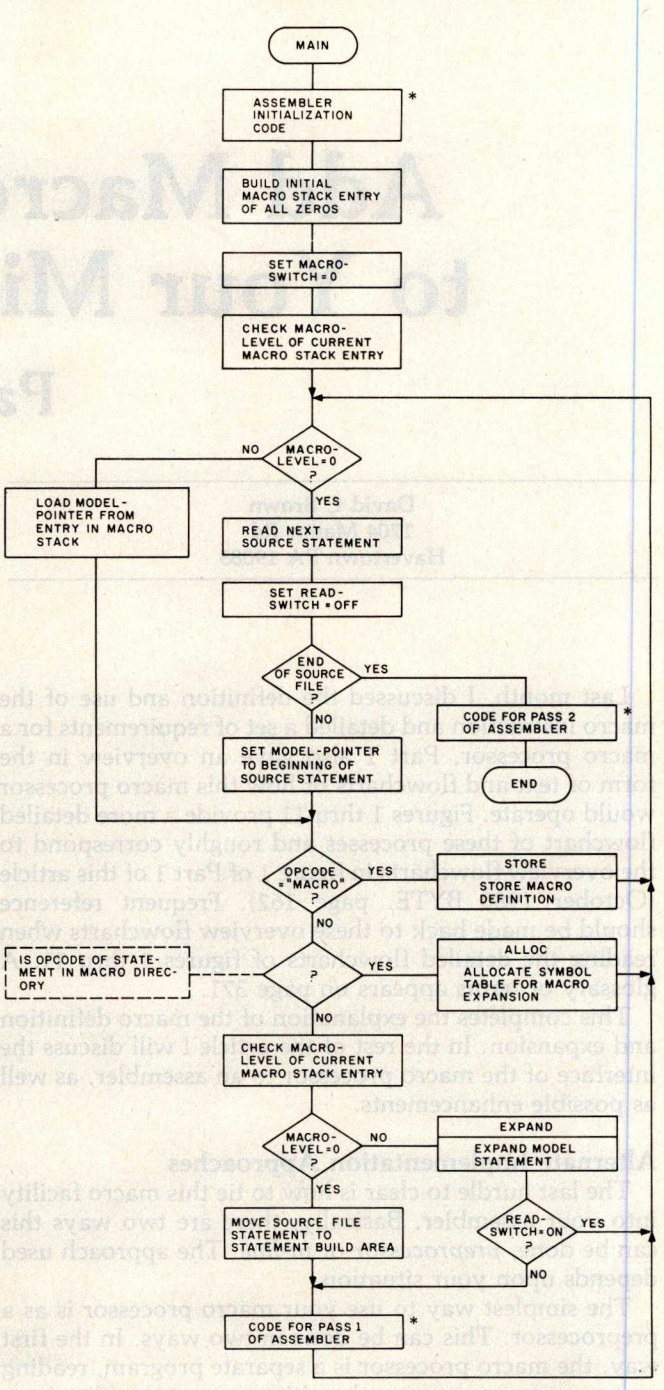


Figure 1: *Overview flowchart for macro definition and expansion. This flowchart, MAIN, takes an assembly-language file containing both macro definitions and macro calls, stores the definitions, expands macro calls, and completes the work of a regular assembler. The boxes marked with asterisks represent the code that performs the assembler functions; the remaining boxes represent the code that is added through modification of the assembler's "read source" routine to implement the macro facility. Refer to the flowcharts in figures 2 thru 11 on pages 363 thru 370.*

FREE SOFTWARE*

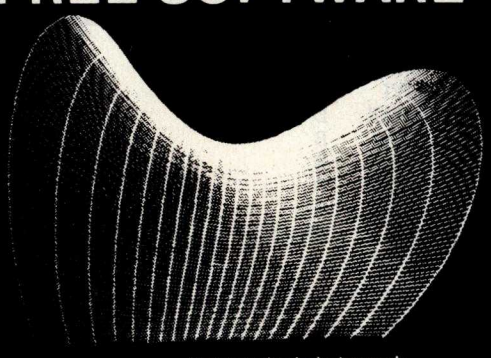

Unretouched photograph

- TEKTRONICS EMULATOR
- PRINTER INTERFACES
- CHARACTER GENERATOR

Designed to work with the CDL

DYNAMIC BLACKBOARD

High Resolution Graphics Interface

• 512 x 640 Matrix • High Speed • Gray tones and color
• Light pen • Fast delivery • 2-year field experience.

*Offer good until January 31, 1981.

Send for brochure and data.

CDL

CAMBRIDGE DEVELOPMENT LABORATORY

36 Pleasant Street, Watertown, MA 02172
(617) 926-0869

Circle 276 on inquiry card.

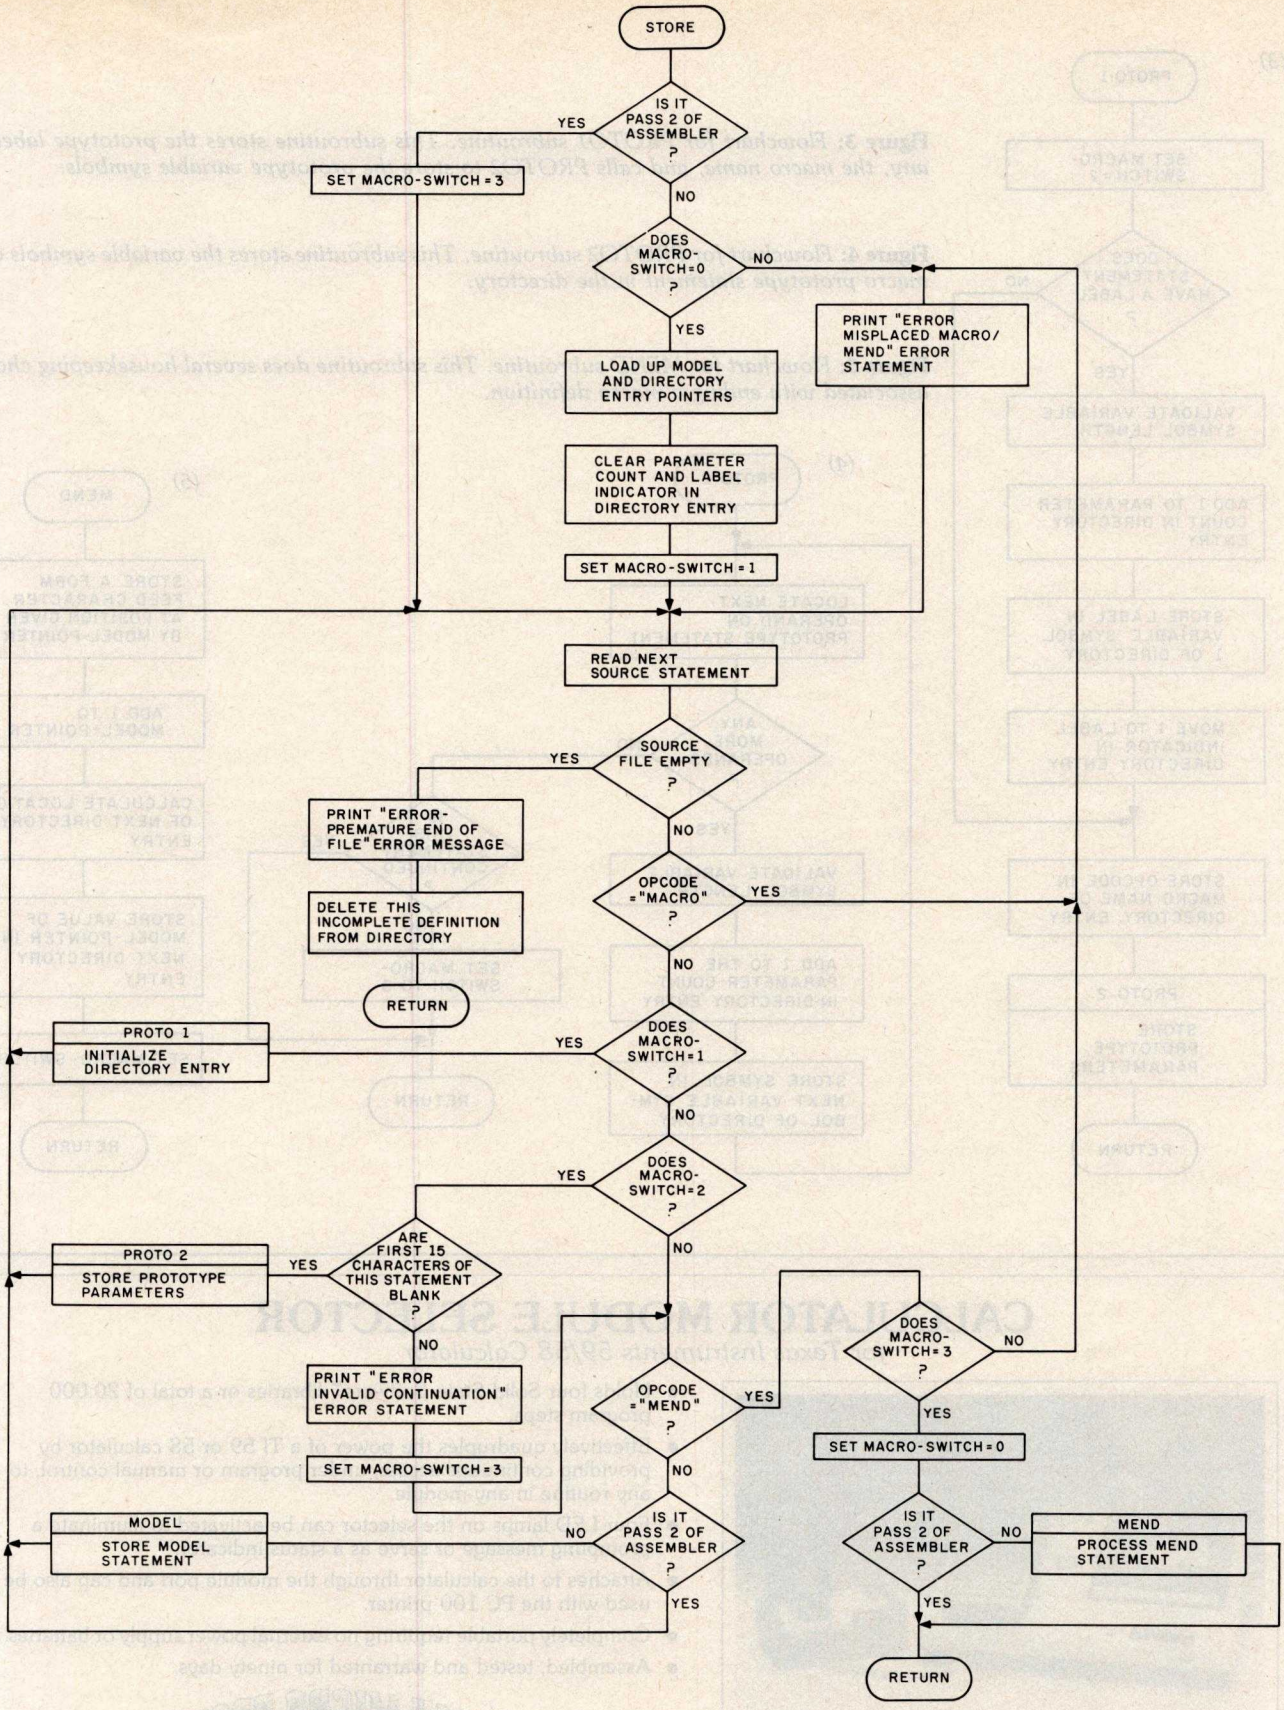


Figure 2: *Flowchart for STORE subroutine. This subroutine stores an entire macro definition within the macro-definition storage area. MACRO-SWITCH is a flag that tells the program what kind of line the routine is expecting next. MACRO-SWITCH=0 means that the computer is ready to process a new macro definition. MACRO-SWITCH=1 means that the computer has found a MACRO statement and is looking for the prototype statement. MACRO-SWITCH=2 means that the computer is ready to process the second line of the prototype statement, if there is one. MACRO-SWITCH=3 means the computer is ready to process the body of the macro definition.*



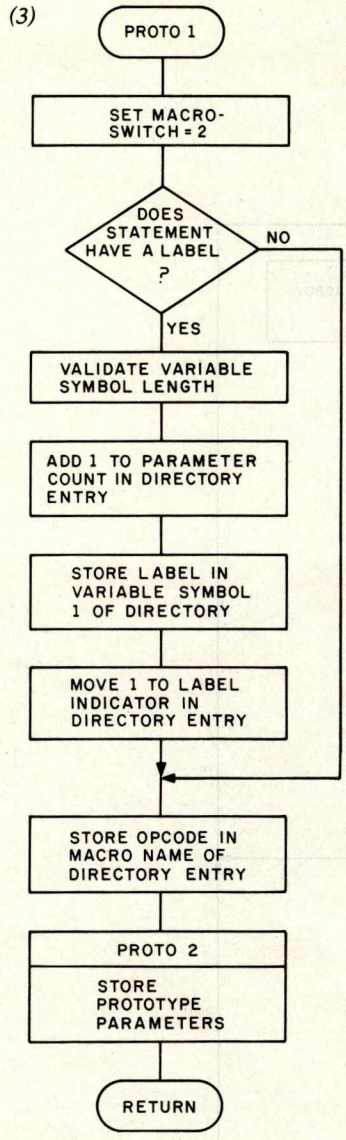


Figure 3: *Flowchart for PROTO1 subroutine. This subroutine stores the prototype label, if any, the macro name, and calls PROTO2 to store the prototype variable symbols.*

Figure 4: *Flowchart for PROTO2 subroutine. This subroutine stores the variable symbols of a macro prototype statement in the directory.*

Figure 5: *Flowchart for MEND subroutine. This subroutine does several housekeeping chores associated with ending a macro definition.*

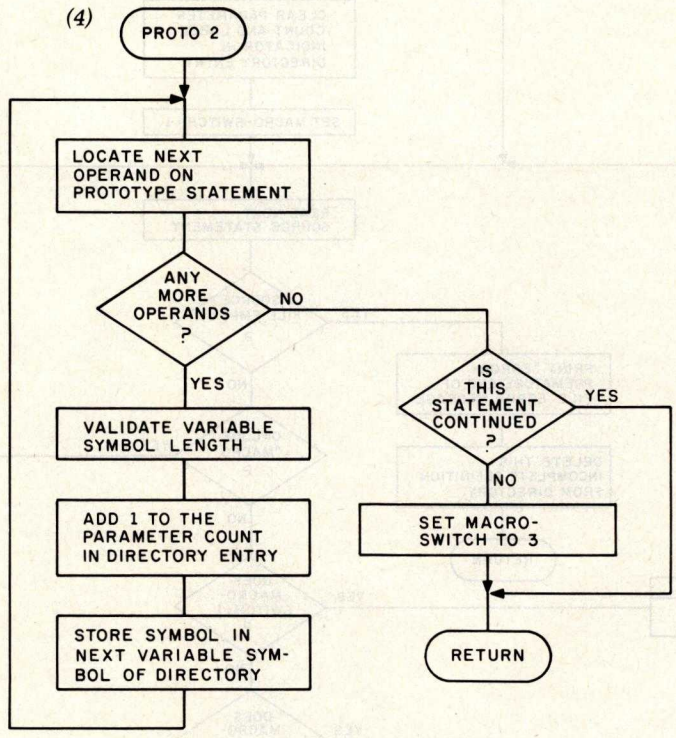

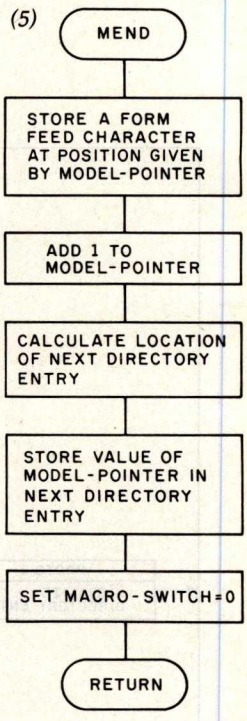

CALCULATOR MODULE SELECTOR

for Texas Instruments 59/58 Calculator



- Holds four Solid State Software™ libraries or a total of 20,000 program steps.
- Effectively quadruples the power of a TI 59 or 58 calculator by providing continuous access, under program or manual control, to any routine in any module.
- Four LED lamps on the selector can be activated to illuminate a prompting message or serve as a status indicator.
- Attaches to the calculator through the module port and can also be used with the PC 100 printer.
- Completely portable requiring no external power supply or batteries.
- Assembled, tested and warranted for ninety days.

$199.95

AMERICAN MICRO PRODUCTS INC.
705 N. Bowser
Richardson, TX 75080
(214) 238-1815

Circle 387 on inquiry card.

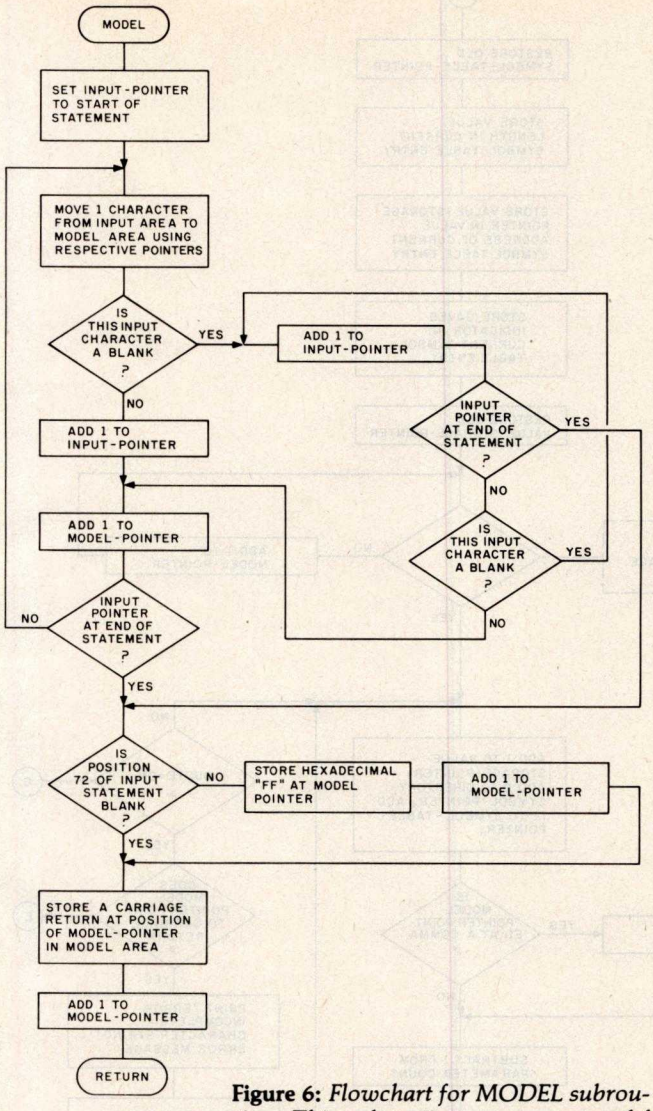


Figure 6: *Flowchart for MODEL subroutine. This subroutine stores one model statement of a macro definition in the macro-storage area.*

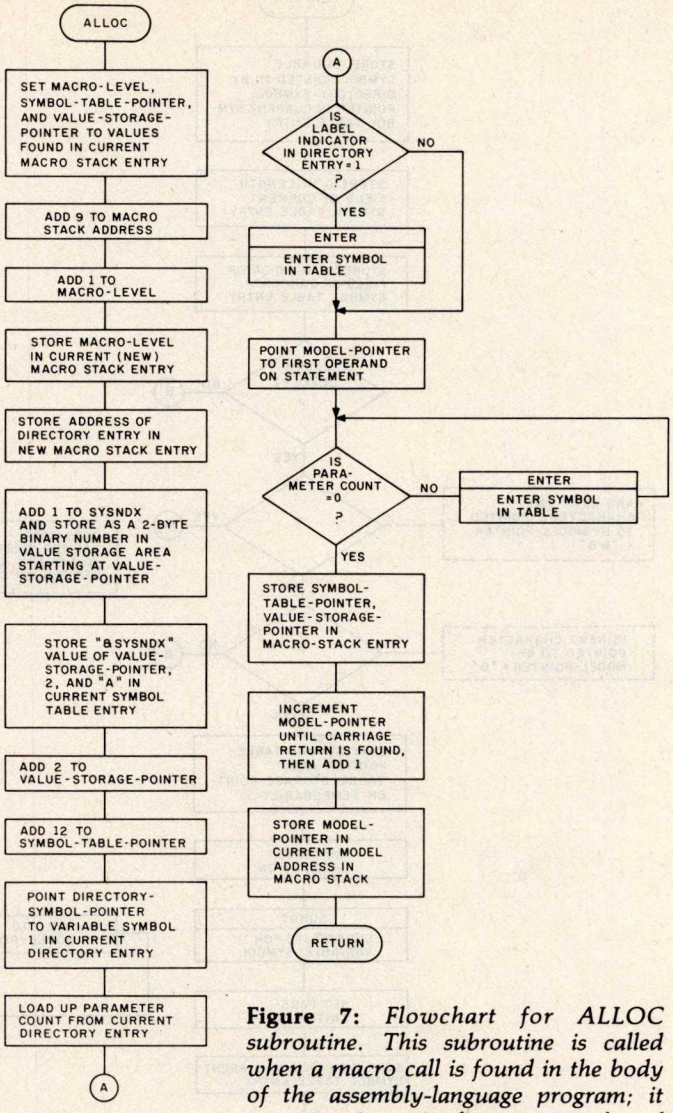


Figure 7: *Flowchart for ALLOC subroutine. This subroutine is called when a macro call is found in the body of the assembly-language program; it sets up pointers in the macro stack and symbol table to identify the current values of the variable symbols as defined in the macro call.*

ARE YOU STILL PLAYING GAMES WITH YOUR COMPUTER?

Get down to business with CBS.
THE CONFIGURABLE BUSINESS SYSTEM™ is a ready-made set of programs that lets you customize your computer without ever using a complex programming language.

- It makes accounting a 1,2,3 operation.
- It turns inventories into child's play.
- It makes mailing lists a zip.

In fact, CBS now makes the business of computers so easy, you might still think you're playing a game!

Disks and manual, $395. Manual only, $40.
CBS Disks can fit any 8080 or Z80 computer with CP/M.* Your DMA representative can tell you about PDOS, our CP/M compatible operating system, and ASCOM, an Asynchronous Communication Control Program.

CP/M* is a Trademark of Digital Research Corp.

DMA • WE SPEAK YOUR LANGUAGE

DYNAMIC MICROPROCESSOR ASSOCIATES • 545 Fifth Avenue • New York, New York 10017 • (212) 953-1721 • Master Charge and VISA accepted

Circle 299 on inquiry card.

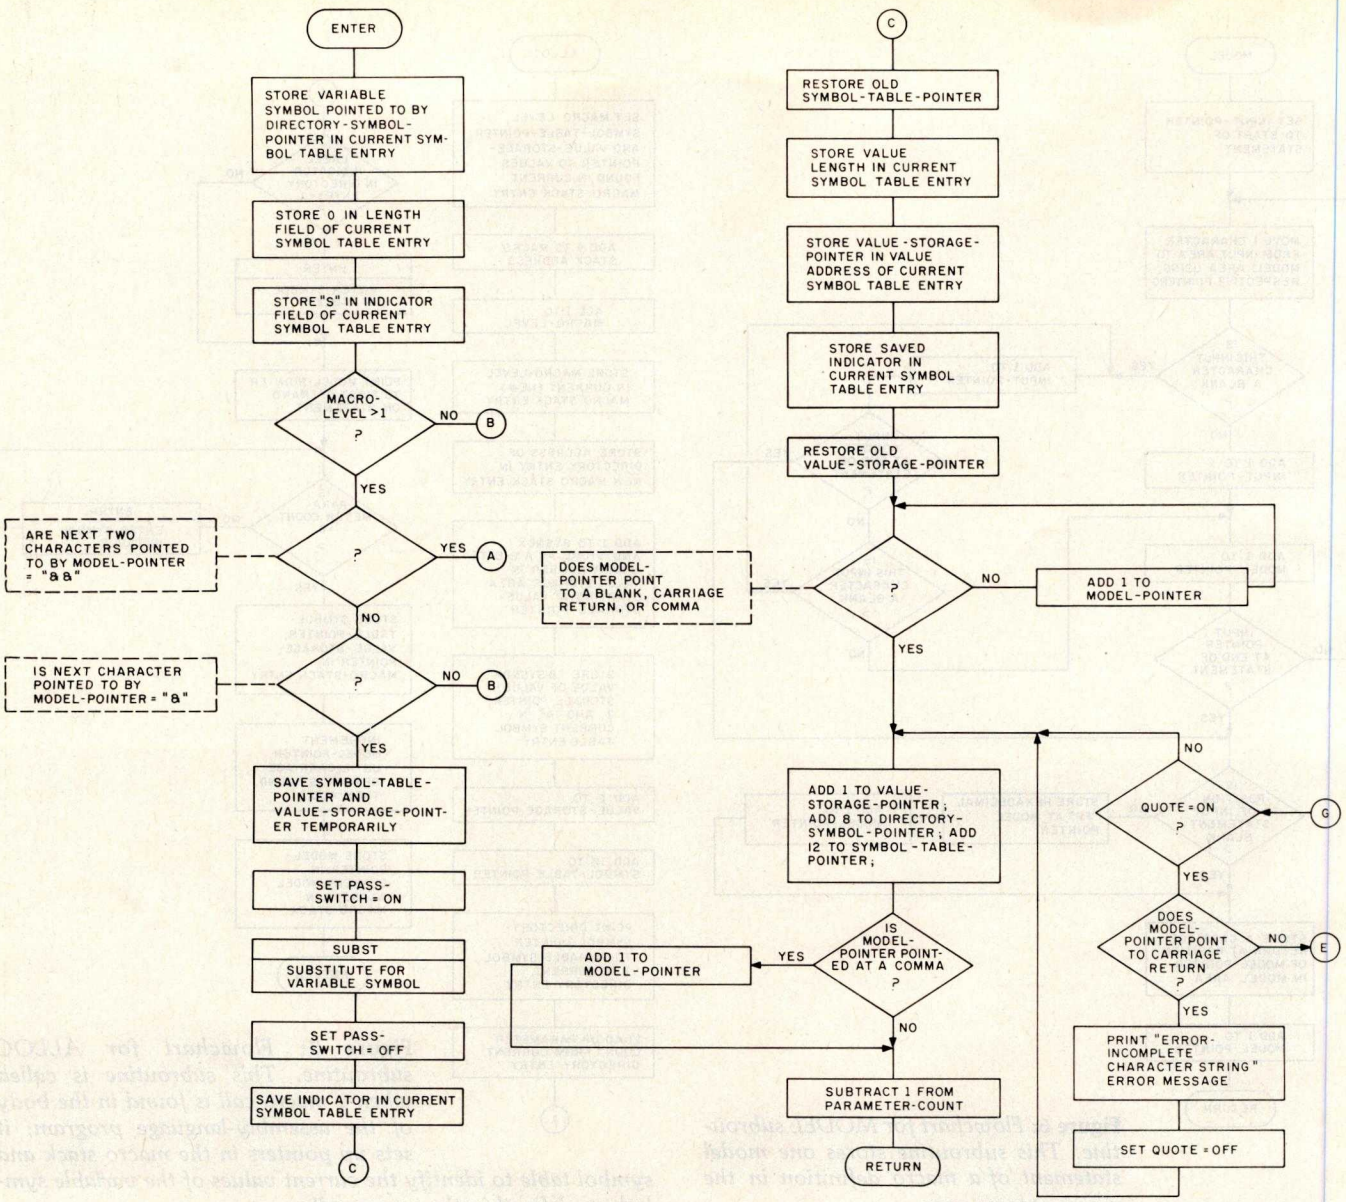


Figure 8: *Flowchart for ENTER subroutine. This subroutine, called by ALLOC, stores the current value of a variable symbol in the symbol table.*

Text continued from page 362:

source listings for your assembler and enough courage on your part to modify your assembler. The operation-code-lookup routine must be modified to first check for the identifier MACRO, at which point it stores the definition. If the operation code is not MACRO and is not found in the assembler's operation-code table, the assembler must then look it up in the macro directory and expand it if found.


In using this in-line approach, you also have to modify the read routines to make use of the macro-level counter, as is done at the beginning of the flowchart in figure 5. This approach, more ambitious than the others, is the best, and it should be taken if you have the assembler source and can take the time. It will result in an efficient, well-integrated assembler, rather than a patchwork creation. However, if this route cannot be taken, the power of macro facilities is probably worth the inefficiency of the preprocessor technique.

Extensions

If you are really ambitious, there are several other facilities that you can implement. Many of these facilities require modifications to the assembler as well as to the macro processor; but if you are still reading at this point, maybe you feel up to the task.

A large improvement can still be made in print facilities. As detailed so far, the macro call itself never gets to the assembler for printing so that you do not know from looking at the intermediate source listing which statements are generated by the macro assembler and which are in the original source. Ideally, the macro call should print and all generated statements should be identified as such. One solution is to print the macro-level indicator, since this shows the level of nesting when nested macro calls are used. You can also add an assembler directive that tells the assembler whether or not to print the generated statements.

Another facility that you can implement is conditional

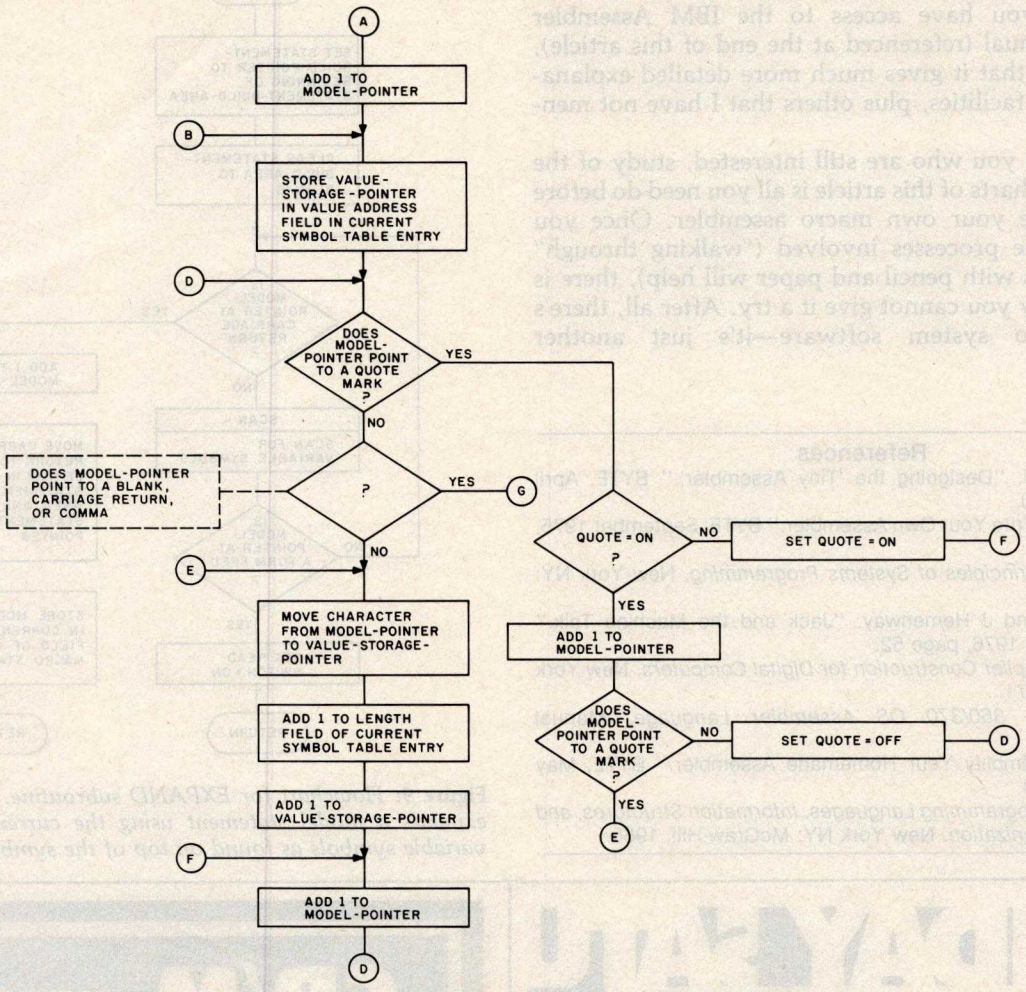

assembly, which was mentioned in Part 1 of this article. This would go along with the ability to define local variable symbols within the body of the macro definition; these local variable symbols would be used for loop control and arithmetic within the macro definition.

Another possible modification is the addition of global symbols and a global symbol table. This would allow you to pass variable symbols from one macro expansion to another. When a global symbol is encountered, you look it up in the global symbol table to get its value. If it is not found there, it is added to the global symbol table. This global table does not have its entries deleted at the end of the macro generation, so the information put there is still present whenever the next macro call is processed.

The method for handling variable symbols and their values detailed in this article is known as *positional parameters*. This means that the first variable symbol on the prototype assumes the first value on the macro call, the second variable symbol assumes the second operand value, and so on. A more flexible method is *keyword parameters*. With keyword parameters, the macro prototype might look like this:

```
&LABEL  MOVE  &FROM=FIELDA,
        &TO=FIELDB,&LENGTH=
```

The macro call would then be coded:

```
LOOP2   MOVE LENGTH=14,FROM=FIELDC
```

Keyword operands are distinguished by an equals sign and have several interesting properties. As shown in listing 1a, the &FROM= and &TO= variable symbols in the prototype specify a default value—FIELDA and FIELDB, respectively. If the FROM and TO operands are omitted on the macro call, the defaults are used as in listing 1b; otherwise, the value from the macro call is used, as in listing 1c. The &LENGTH= parameter on the prototype has no default, so it must be specified on the macro call. Also, since you specify the keywords on the macro call, they do not have to be in the same order as specified on the prototype. Otherwise, the keywords are used in the macro-definition statements just like the positional parameters I have been discussing.

Keyword processing requires a more complicated loading of the symbol table when the macro call is encountered; it also requires modifications to the routine that stores the macro definition, since the defaults will have to be stored in the value-storage area and the directory entries will have to be modified to point to the default values. It is a lot of work, but it is much more flexible.

These are just some of the enhancements you can implement. If you have access to the IBM Assembler Language manual (referenced at the end of this article), you will find that it gives much more detailed explanations of these facilities, plus others that I have not mentioned.

To those of you who are still interested, study of the text and flowcharts of this article is all you need do before you can write your own macro assembler. Once you understand the processes involved ("walking through" the flowcharts with pencil and paper will help), there is no reason why you cannot give it a try. After all, there's no magic to system software—it's just another program. ■

References

1. Emmerichs, J. "Designing the 'Tiny Assembler'." BYTE, April 1977, page 60.
2. Fylstra, D. "Write Your Own Assembler." BYTE, September 1975, page 50.
3. Graham, R. *Principles of Systems Programming*. New York NY: Wiley, 1975.
4. Grappel, R and J Hemenway. "Jack and the Machine Talk." BYTE, August 1976, page 52.
5. Gries, D. *Compiler Construction for Digital Computers*. New York NY: Wiley, 1971.
6. *IBM System 360/370 OS Assembler Language*, Manual GC28-6514.
7. Jewell, G. "Simplify Your Homemade Assembler." BYTE, May 1976, page 74.
8. Wegner, P. *Programming Languages, Information Structures, and Machine Organization*. New York NY: McGraw-Hill, 1968.

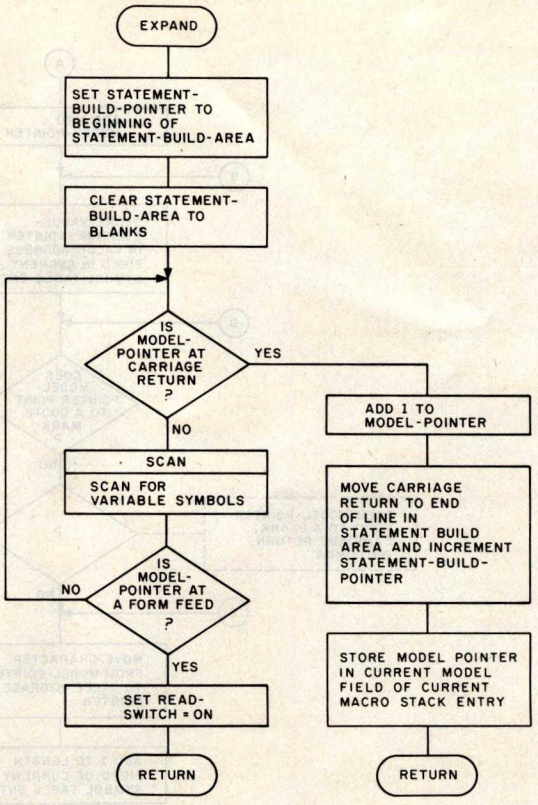


Figure 9: *Flowchart for EXPAND subroutine. This subroutine expands a model statement using the current values of the variable symbols as found on top of the symbol table.*

FRIDAY SALE

APPLE-TIME $150

For Your **APPLE**... The Ultimate **CLOCK/CALENDAR** Board

MORE FEATURES FOR LESS

- 12 or 24 HR Format
- Perpetual Calendar MM DD YY
- Crystal Controlled Time Base
- Ultra Fast Time/Date Setting
- 4 Interrupts Available
- Months Of On-Board Battery Backup

Set it & forget it.

MANY MORE FEATURES

TSR80 & S100 MODELS AVAILABLE

C/T **Compu/Time**
P.O. Box 5343
Huntington Beach, Ca. 92646 (714) 536-5000

Dealer Inquires.

Makers Of Quality Low Cost Microcomputer Components

Circle 279 on inquiry card.

CP/M® USERS!

The ED-80 TEXT EDITOR

- $50,000 in Development Costs — Yours for Only $99!
- For all CP/M, Cromemco, TRS-80 Mod II, and North Star Systems.
- Full Screen Text Editor w/Scrolling.
- For all CRT and Video Monitors.
- Features Found only on IBM, CDC, UNIVAC and DEC Systems.
- Forward or Backward Locate and Change Commands.
- Field Proven — More than 2 Years.

***A Terrific Value* — $99.00** **Write for FREE Color Brochure**

Software Development & Training, Inc.
Post Office Box 4511, Dept. B
Huntsville, Alabama 35802

VISA or MC

Circle 280 on inquiry card.

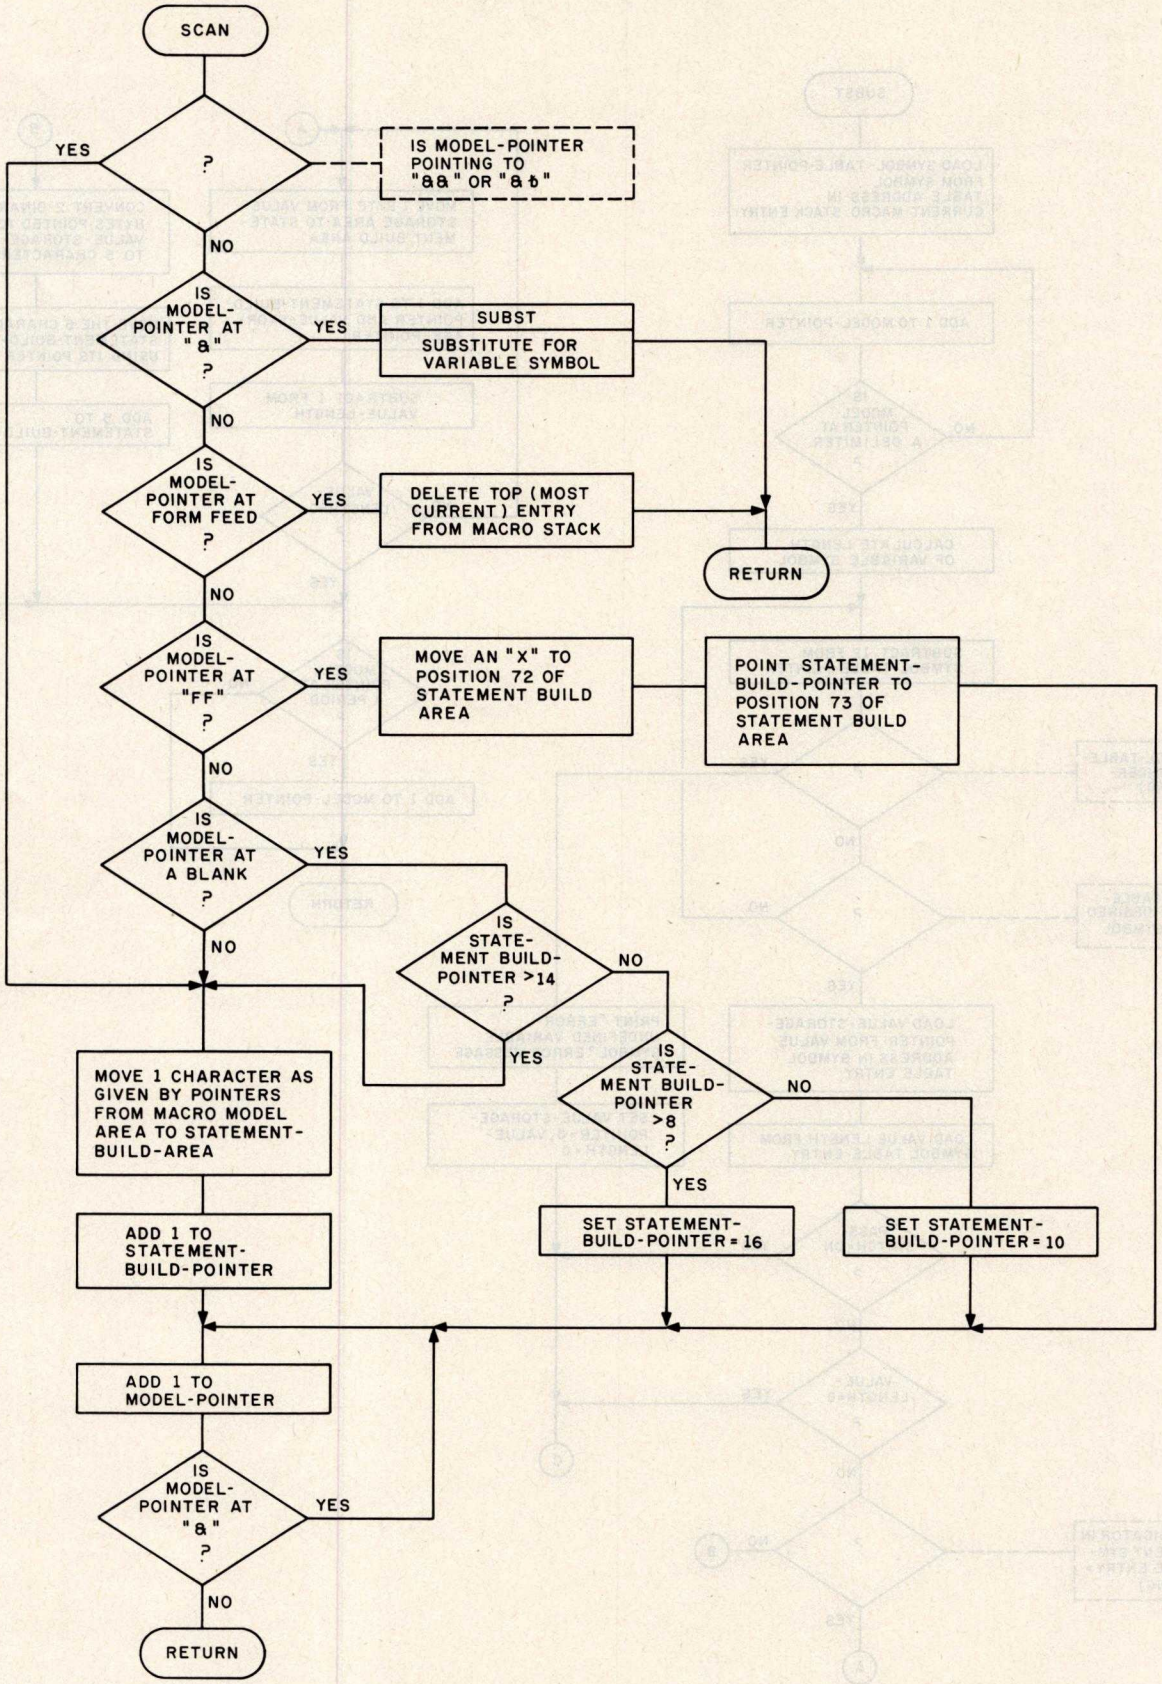


Figure 10: *Flowchart for SCAN subroutine. This subroutine scans for variable symbols in the model statement and replaces them with their most recent values; it also restores blanks that were compressed out of the model statement.*

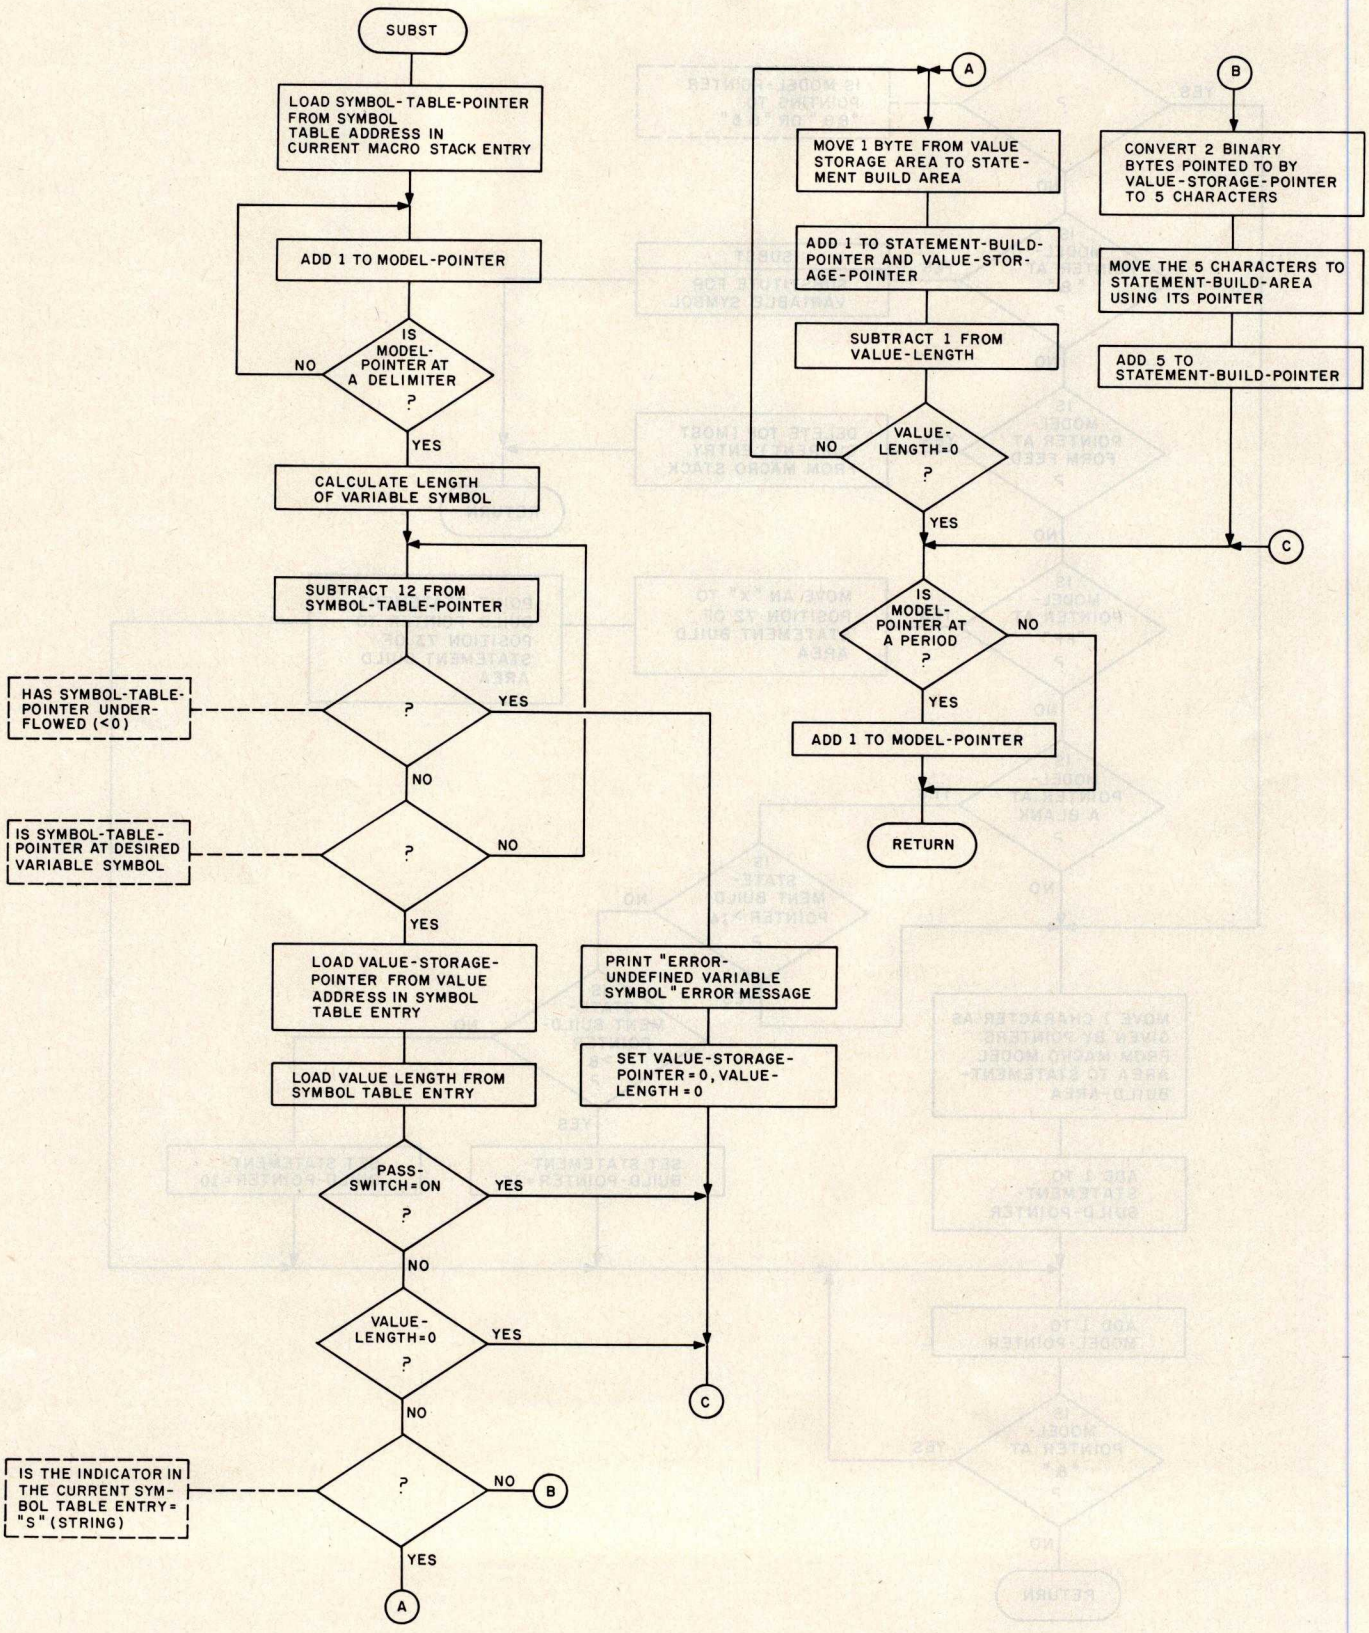


Figure 11: *Flowchart for SUBST subroutine. This subroutine, called by SCAN, substitutes the appropriate value for its corresponding variable symbol in a model statement.*

GLOSSARY

Conditional Assembly: *a feature of macro assemblers that instructs the assembler to generate or leave out certain lines of assembly-language code based on a given condition evaluated at the time of expansion.*

Descriptor: *useful when working with strings of characters. It is a fixed-length entry containing the length of the string and a pointer to where the string starts in the storage area. (Symbol-table entries can be considered descriptors.) Descriptors are used frequently in assemblers and in high-level language compilers.*

Directory: *it contains an entry for every macro defined, pointing to the start of the model statements and specifying the variable names (from the macro prototype) that must be entered into the symbol table before the macro is evaluated.*

Global Variable: *a variable whose value is in effect for the entire assembly and for every macro generation. Use of a given global variable name, even within different macros, refers to the same value (unlike local variable symbols, the values of which are lost at the end of the macro expansion). In this article, &SYSNDX is a global variable.*

Inner Macro: *a macro call specified within the model statements of another macro. When a macro referred to as the* outer macro *is generating statements and encounters an inner macro, it must stop, generate the statements from the inner macro call, add them to the statements belonging to the outer macro, then continue generating its own statements.*

Keyword Operand: *a variable symbol followed by an equals sign; it appears only on the macro prototype and the macro call. Unlike positional parameters, keyword operands can be coded in any order. They also allow the ability to specify default values in the macro prototype.*

Local Variable: *a variable, the value of which is in effect only for the macro in which it is defined. All variable symbols defined in macro prototype statements are local variables. The same local variable symbol name used in another macro is treated as a separate variable, even though the names are the same.*

Macro: *a user-defined assembly-language operation code that generates one or more assembler instructions.*

Macro Call: *a pseudoinstruction within an assembly-language program that refers to a macro definition of the same name. The eventual result is the replacement of the macro call statement with the expanded model statements of the macro definition.*

Macro Definition: *a sequence of statements that tell the macro processor what to generate when replacing the macro-call instruction. It is made up of a MACRO statement that signals the beginning of the macro, a prototype statement that defines the macro name and its operands, a series of model statements that replace the macro call, and a MEND statement that signals the end of the macro definition.*

Macro Stack: *a stack of certain information about currently incompleted macro calls; it is necessitated by the ability to call a macro within a macro. Each macro-stack entry points to the directory entry, the end of the symbol table, and the value-storage area for the macro.*

Model-Storage Area: *an area of computer memory set aside for storing the model statements of all macro definitions. The directory entry for each macro points to the start of that macro's model statements in the model-storage area.*

Pass 1: *the assembler's first reading of source statements. During pass 1, the assembler builds its symbol table, which includes every label in the program, and checks for duplicate symbols.*

Pass 2: *the assembler's second reading of the source statements. At this point, all symbols are known to the assembler as a result of pass 1, and the equivalent machine code can be generated from the source code.*

Positional Operands: *when the variable symbols in a macro prototype are defined as positional operands, they are assigned values from the list of operands in the macro-call statement in the order that they are defined in the prototype. The first variable symbol on the prototype gets the first operand value, and so on.*

Preprocessor: *a routine or program that processes and usually modifies the input before the main program gets it. Macro facilities are often written as preprocessors that replace macro calls with their expanded assembly-language statements before passing the source file to the assembler.*

Prototype: *the second statement in the macro definition. It defines the label entry, the operation code (macro name), and the allowable operands (in the form of variable symbols) for the macro call.*

Recursion: *a technique in which a called subroutine calls itself. A recursive function must be designed so that it eventually returns a value rather than calling itself again; otherwise, it calls itself in a loop that never finishes.*

Stack: *a last-in, first-out list that allows the user to remove only the value most recently placed onto the stack. Stacks are similar to the devices used to dispense plates in a cafeteria. Plates (values) are put on the top of the stack, pushing down all the others, and are removed from the top, causing the others to pop up. A stack in programming works the same way, giving rise to the terms PUSH and POP, which are commonly used when talking about computer stacks.*

Symbol Table: *a stack containing an entry for each variable in the macro prototype. The symbol-table entry specifies the variable name, the length of its current value, and the address where the value is stored in the value-storage area.*


Text Compression: *the process of removing all unnecessary blanks from a source statement in order to reduce the amount of space needed to store the text.*

Value-Storage Area: *an area of memory set aside for storing the values associated with a program's variables. The symbol-table entry for each variable points to the start of that variable's value and specifies the value length.*

Variable: *a variable (or variable symbol) is a character string that can have many different values assigned to it by either the programmer or the assembler. Variables can be either global or local; most references to variable symbols in this article actually refer to local variable symbols.*

What's New?

PERIPHERALS

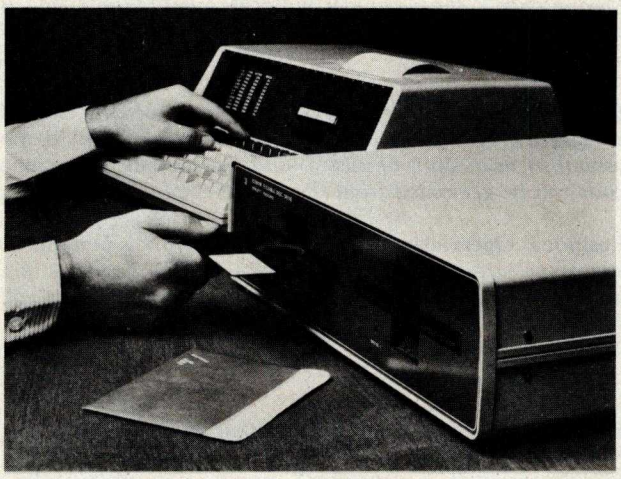



Floppy-Disk Drive for the HP-85

The HP 82900 Series floppy-disk drives read double-sided, double-density, 5-inch floppy disks, and can be configured to provide from 279 K bytes to 1.08 megabytes of storage. The interface between the HP-85 and the disk drives is the HP-85 Mass Storage ROM (read-only memory). The ROM makes available thirty additional BASIC commands including a Translate command, which upgrades written tape-based programs for use on the drives; the ability to store and retrieve the graphics display on the video screen; automatic default to the drive; and volume labeling, allowing users to refer to disks by name and write programs independent of drive addresses. Prices for the floppy-disk drives start at $1500 for a single-master drive and go to $2500 for a dual-master drive. Contact the Inquiries Manager, Hewlett-Packard Co, 1507 Page Mill Rd, Palo Alto CA 94304.

Circle 662 on inquiry card.

Seven Spinwriter Thimble Fonts from NEC

NEC Information Systems Inc, 5 Militia Dr, Lexington MA 01273, (617) 862-3120, has introduced Pica 10 Multilingual, Elite 12 Multilingual, British Elite 12, Greek/Times Roman, Scientific Times Roman, Super Courier/Publishers, and Light Italic/Manifold type fonts. These fonts meet the special printing requirements of many industries. The multilingual fonts offer the capability of printing over thirty languages. The fonts are offered on the NEC Spinwriter series of 55 character per second impact printers which feature the "thimble" print element.

Circle 663 on inquiry card.



Line Driver Meets Bell Metallic-Line Specifications

Tuck Electronics has announced a line-driver series for use on metallic pairs from 0 to 9.6 kbs for 4-wire full-duplex service. The driver complies with Bell 43401 amplitude and line balance specifications, and features a floating receiver amplifier. The unit features analog and digital loop-back test facilities, and a blinking light which indicates when the driver is in the test mode. The driver supports an RS-232 interface. The unit is available in stand-alone and multiple units. Single unit price for stand-alone units is $175, and multiple-unit cards are $162. For more information, contact Tuck Electronics Inc, 3645 Industrial Park Rd, Camp Hill PA 17011, (717) 761-4354.

Circle 664 on inquiry card.


Where Do New Products Items Come From?

The information printed in the new products pages of BYTE is obtained from "new product" or "press release" copy sent by the promoters of new products. If in our judgement the information might be of interest to the personal computing experimenters and homebrewers who read BYTE, we print it in some form. We openly solicit releases and photos from manufacturers and suppliers to this marketplace. The information is printed more or less as a first in first out queue, subject to occasional priority modifications. While we would not knowingly print untrue or inaccurate data, or data from unreliable companies, our capacity to evaluate the products and companies appearing in the "What's New?" feature is necessarily limited. We therefore cannot be responsible for product quality or company performance.

What's New?

PERIPHERALS

Large-Screen Color Monitor

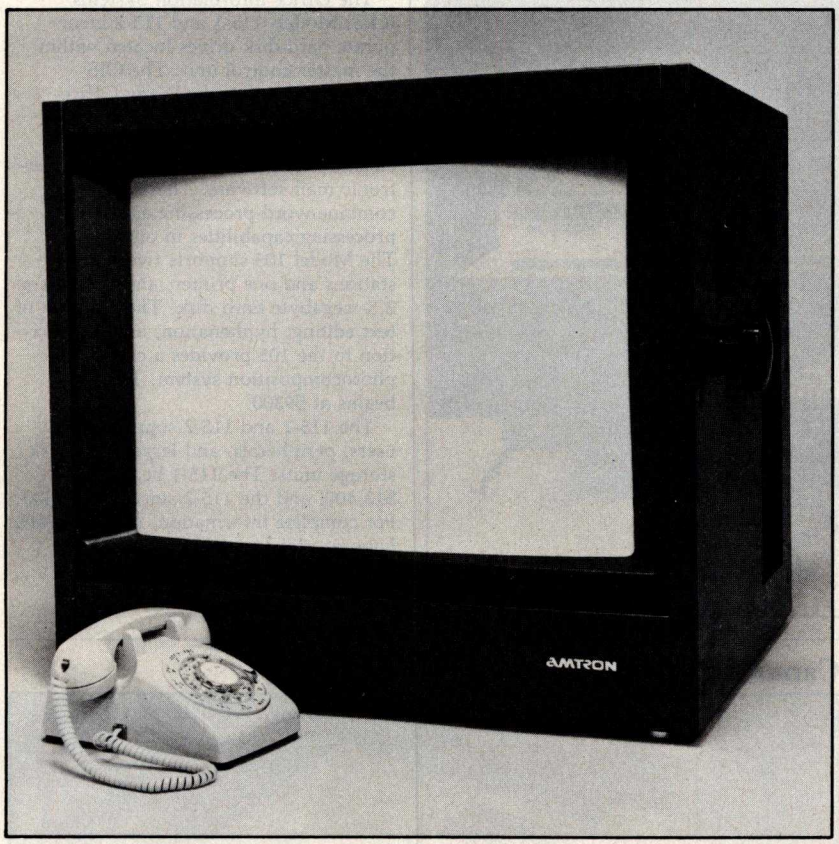

The AM-26, a 26-inch color monitor, with over 340 square inches of screen surface, combines Sony's Trinitron color system with switchable A/B inputs, switchable underscan, internal and external sync, and separate RGB (red, green, and blue) gun switches. Talley light, separate horizontal and vertical scan delay are optional, and a separate tuner/audio amplifier and speaker section may be added. The Amtron AM-26 is priced at $2395 from Amtron, Aptos CA 95003, (408) 688-4445.

Circle 665 on inquiry card.

Digital Plotters from Houston Instrument

The DMP family of plotters comprises two standard and four intelligent models. All these models are available with plotting sizes of 21.5 by 28 cm (8.5 by 11 inches) and 28 by 44 cm (11 by 17 inches). The DMP-2 is a 21.5 by 28 cm plotter with an RS-232C and parallel interface. It has a pen speed of 2.4 inches per second and can plot at 100 or 200 increments per inch. The DMP-5 has a surface area of 28 by 44 cm and the RS-232C and parallel interface. The unit is plug-compatible with the DMP-2 and can utilize software developed for the DMP-2. The DMP-3 features a built-in microprocessor and pen speeds of 3 inches per second. Use of Houston Instrument's Digital Micro/Plotter Language alleviates the software burden on the host computer. Self-test and pen positioning are accomplished via a computer or terminal keyboard. The DMP-3 comes with an RS-232C or Centronics-compatible interface. The DMP-6 is a 21.5 by 28 cm version of the DMP-3 and features a pen speed of 2.4 inches per second. The DMP-4 and the DMP-7 utilize electronic controls to facilitate positioning of the X and Y axes. Self-diagnostics are activated through front panel controls. Prices for the DMP Series plotters start at $1085. For complete information, contact Houston Instrument, 1 Houston Sq, Austin TX 78753, (512) 837-2820.

Circle 666 on inquiry card.

Paper-Tape Reader

A paper-tape reader/transmitter, the Model 612, is available from Addmaster Corporation, 416 Junipero Serra Dr, San Gabriel CA 91776, (213) 285-1121. The 612 features the ability to read five- to eight-level tape and to transmit 7 to 11 frames per character at 50 to 9600 bps (bits per second). Other features include starting and stopping on character at all speeds; choice of manual or automatic control; 90 to 260 V, 50 to 60 Hz power sources; and even, odd, or no parity; with a choice of desk-top or rack mounting. The price is $656 to $779.

Circle 667 on inquiry card.

Chatterbox from Micromint



The Chatterbox is a packaging combination of the presently available COMM-80 I/O (input/output) interface for the TRS-80 and an acoustic modem. This box can turn even a 4 K-byte TRS-80 into a full time-sharing terminal. The Chatterbox includes a built-in programmable 50 to 19 K bps (bits per second) serial port, a Centronics-compatible parallel printer port, a 300 bps acoustic originate modem, and a spare TRS-BUS expansion connector. It comes with a power supply, connection cable, manual, and smart terminal software. When the modem is in use, the data conversation is automatically routed to the serial output port for printing. The Chatterbox allows a TRS-80 to communicate with time-sharing systems such as Micronet and the Source. In addition, Chatterbox can be used simply to provide an address selectable serial and parallel port. It is completely hardware- and software-compatible with existing TRS-80 products, and it connects either to the keyboard connector or screen printer port on the Expansion Interface. It does not require the Expansion Interface for operation. The Chatterbox is available for $259 from The Micromint Inc, 917 Midway, Woodmere NY 11598, (516) 374-6793.

Circle 668 on inquiry card.

What's New?

SYSTEMS



Systems from Wang

The Office Information Systems (OIS) Models 115-1 and 115-2 incorporate hard-disk drives located within the master control unit. The OIS systems can utilize the Wang Office-BASIC language, telecommunications and high-speed image printing capabilities, and Wang MAILWAY electronic mail software. These systems combine word-processing and data-processing capabilities in one device. The Model 105 supports two workstations and one printer, and contains a 2.5-megabyte hard disk. The addition of text editing, hyphenation, and justification to the 105 provides a complete photocomposition system. The 105 begins at $9300.

The 115-1 and 115-2 support more users, peripherals, and larger hard-disk storage units. The 115-1 begins at $13,400, and the 115-2 starts at $15,400. For complete information, contact Wang Laboratories Inc, 1 Industrial Ave, Lowell MA 01851, (617) 459-5000.

Circle 669 on inquiry card.

Casio Markets Its First Computer

The FX-9000P computer, priced under $900, has been introduced by Casio Inc, 15 Gardner Rd, Fairfield NJ 07006, (201) 575-7400. It features instantaneous operation of the user system when the power is switched on. A graphic-display system makes it possible to display graphs, diagrams, and tables. The FX-9000P has all functions necessary to perform scientific and technical calculations and business analyses. The machine accepts memory packages to expand memory capacity.

Circle 670 on inquiry card.

British S-100-Based Microcomputer

The Tuscan S-100 is based on the IEEE (Institue of Electrical and Electronics Engineers) standard S-100 bus. This single-board computer uses a Z80 microprocessor, can store 64 K bytes of programmable memory, is CP/M compatible, and includes a printer interface. Expansion capabilities include high-resolution graphics and speech synthesis cards. Transam offers application software packages that include BASIC and Pascal. Tuscan S-100 prices start at £195 for kits. For details, write Transam, 12 Chapel St, London NW1 5DH, England.

Circle 671 on inquiry card.

Canon Introduces Its Desk-Top Computer



The TX Series microcomputers from Canon feature a 6809 microprocessor, extended BASIC and assembler language, a twenty-column alphanumeric video display, and a built-in twenty-six-column triple-copy impact printer. The models have 15 K bytes of user memory which can be expanded to 31 K bytes. Each model has an RS-232 interface port and a modem port. The TX-25 is a programmable machine with a full typewriter keyboard and a built-in Canon floppy-disk drive. The TX-10 and TX-15 are nonprogrammable. The TX-15 incorporates a typewriter keyboard, while the TX-10 has a ten-key pad with twenty-six labeled keys. The price for the series is $1295 from Canon Systems Division, 10 Nevada Dr, Lake Success, Long Island NY 11042, (516) 488-6700.

Circle 672 on inquiry card.


What's New?

GRAPHICS


Colormaster Video and Graphics Board

The Colormaster allows users to program virtually any display format (eg: 64 by 32, 128 by 16, and 80 by 25). The board is designed for S-100 bus systems. Characters may be reversed, dimmed, flashing, underlined, and any of eight colors. Bit-mapped graphics or an optional PROM (programmable read-only memory) graphics set may also be displayed. Another option allows extension of the character set to include 128 user-defined characters. The Colormaster kit is $399; assembled and tested, it is $499; and the bare board is $79. For more information, contact MicroDaSys, POB 36051, Los Angeles CA 90036, (213) 731-0876.

Circle 673 on inquiry card.

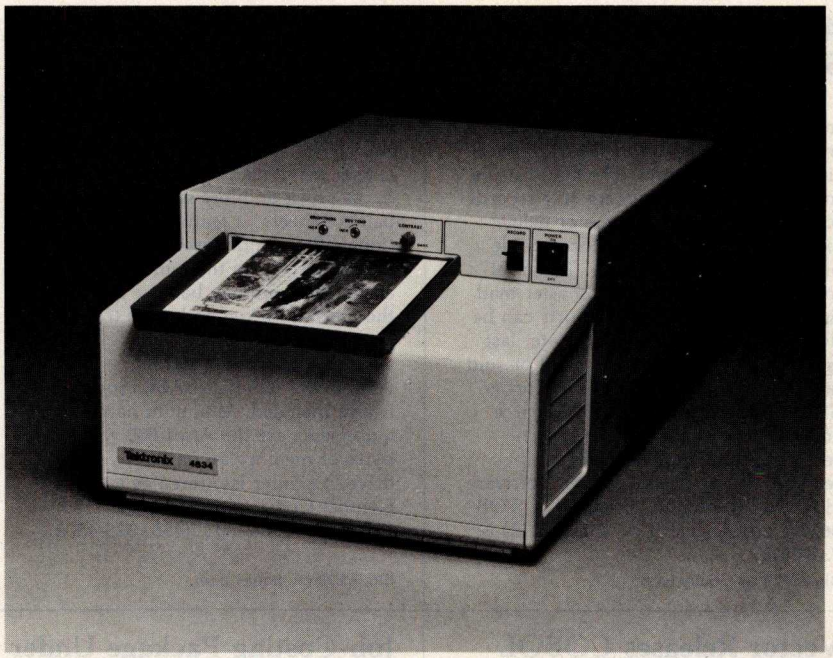

Summagraphics Unveils Supergrid Digitizer

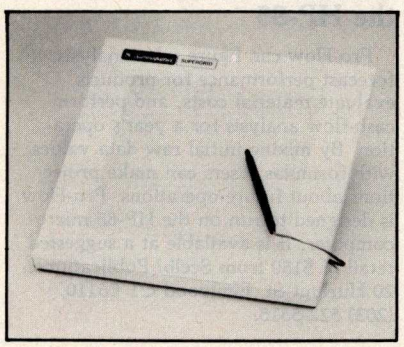

The microprocessor-based Supergrid utilizes a new technology—the Direct Magnetostrictive principle. This unit features high accuracy (±.005 inch or 0.125 mm) and high-resolution (.001 inch or 0.025 mm) and eliminates the need for a biasing magnet. Supergrid is translucent with a flat surface; moreover, it supports a stylus and a cursor, and it permits simultaneous use of two digitizer tablets with the same driving electronics. The Supergrid comes in 11 by 11 and 20 by 20 inch forms, with larger versions to follow. RS-232C, IEEE, 8-bit parallel, and 16-bit parallel interfaces are supported. The technology behind the device is based on a principle that replaces a matrix of magnetostrictive wires with a matrix of plain copper wires and only one magnetostrictive wire per axis. For more information, contact Summagraphics Corporation, 35 Brentwood Ave, Box 781, Fairfield CT 06430, (203) 384-1344.

Circle 674 on inquiry card.

Hard-Copy Unit for Video Images

The Tektronix 4634 Imaging Hard Copy Unit produces high-quality continuous tone copies from raster-scan video sources in seconds. Designed to provide photographic quality images, the device is aimed at digital image processing, pattern recognition, remote sensing, video-disk, and high-resolution display environments. The 4634 records on dry silver paper using a fiber-optic video display. The process requires no toners or developers. The copies have a twelve-tone gray-scale range. The approximate cost per copy is $0.20. It prints 6 by 8 inch images on 8½ by 11 inch paper. It is usually requires a single cable connection and can be interfaced to most raster-scan video sources, whether analog or digital. An automatic gain-control circuit tracks the input signal. Paper is available in 8½ inch by 500 foot rolls. Paper length can be adjusted from 7 to 11 inches. For more information, contact Marketing Communications Department, M S 63-635, Tektronix Inc, POB 500, Beaverton OR 97077, (503) 682-3411.



Circle 675 on inquiry card.

Digitizer for the Apple II

The DS-65 Digisector is a random access video digitizer for the Apple II. It converts a television-camera's output into digital information that the Apple can process. The Digisector features high-resolution reproduction, sixty-four levels of gray scale, and accepts interlaced or industrial video input. The unit has on-board software featuring full screen scans directly to the Apple screen, random access digitizing by BASIC programs, line-scan digitizing for reading charts or tracking objects, and utility functions for clearing and copying the screen. BASIC programs include a burglar alarm and a graph reader. Complete source listings are included in the package. The DS-65 is used for digitizing pictures; security systems; moving-target indicators; computer portraits; reading paper tape, strip charts, bar codes, and more. The price is $349 from The Micro Works, POB 1110, Del Mar CA 92014, (714) 942-2400.

Circle 676 on inquiry card.

What's New?

SOFTWARE

A Mail-List and Data-Base System

SelectraSort is a mail-list, data-base management system. It can pull records from mail-list files on the basis of over sixty selection criteria. The mail-list-file maintenance module enters new records to the mail list and changes or deletes existing entries. The selection module pulls records form the files. The print module prints selected and master mail lists as well as mail labels. Sorts can be done by ZIP code, country, state, last activity date, amount purchased or sold last year and this year. SelectraSort is $195, which includes CBASIC source code. It is available on 8-inch soft-sectored and 5-inch soft- and hard-sectored floppy disks. Contact Software Hows, a division of MicroDaSys, POB 36275, Los Angeles CA 90036, (213) 731-0877.

Circle 677 on inquiry card.

General Ledger for the Atari

MicroLedger, the Compumax general ledger program, has been converted to run on the Atari 800. The Atari MicroLedger performs trial balances and produces profit-and-loss statements and balance sheets. It features updating options, allowing the user to review and update records in the journal or chart of accounts; a running balance column in the journal listing; and error traps. The MicroLedger package retails for $140, which includes the program, sample data, and a manual. BASIC source code is also included. Minimum hardware requirements are the Atari 800 with 24 K bytes of memory and a floppy-disk drive; a printer is offered as an option. Contact Compumax Inc, POB 1139, Palo Alto CA 94301, (415) 325-4503.

Circle 678 on inquiry card.

Data Manager for the Apple

Information Master is a data manager for use with the Apple and includes the ability to do calculations, totals, subtotals, and more. The program lets the user define, enter, edit, sort, and retrieve data. Printed report formats using the report-generation features can be defined. Other features include screen formatting, error trapping, and the ability to add, multiply, divide, and do exponentiations. A program is included that transfers files from the Management System for use with the Information Master. For further details on the Information Master program, contact High Technology Inc, POB 14665, 8001 N Classen Blvd, Oklahoma City OK 73113, (405) 840-9900.

Circle 679 on inquiry card.

Vector Releases COBOL with Program Generator

Vector Graphic Inc has released a version of its ANSI-standard CIS COBOL, featuring program generation capability. Version 4.2 of CIS COBOL implements the eight modules necessary to meet the ANSI Level 1 standard at the low-intermediate level. The FORMS-2 utility generates data-entry screens and can create error-free data input programs without the programmer writing a line of code. It is available from Vector Graphic Inc, 31364 Via Colinas, Westlake Village CA 91361, (213) 991-2302.

Circle 680 on inquiry card.

Job-Costing Package Under CP/M

This job-costing package consists of a reporting facility, a job-costing accounts payable, and a job-costing payroll. These programs are designed to run on a Z80 or 8080 processor using the CP/M operating system. Other CP/M-like systems are also supported. The software will run on hard or floppy disks. The business applications are integrated, yet each will run singly. The price is $700 for a system from Arkansas Systems Inc, Suite 206, 8901 Kanis Rd, Little Rock AR 72205, (501) 227-8471.

Circle 681 on inquiry card.

Business Application for the HP-85

Pro-Flow can figure sales analysis, forecast performance for products, evaluate material costs, and perform cash-flow analysis for a year's operation. By mixing initial raw data values with formulas, users can make projections about future operations. Pro-Flow is designed to run on the HP-85 microcomputer. It is available at a suggested retail of $150 from Scelbi Publications, 20 Hurlbut St, Elmwood CT 06110, (203) 522-5515.

Circle 682 on inquiry card.

Disk-O-Tape

Disk-O-Tape is a utility program for the Apple II and Apple II Plus computers. It enables users to transfer the data from a floppy disk to cassette tape and back again. The program features sector-by-sector copy of a DOS 3.2 disk to tape, error detection, and a verification pass for reliability. Each tape produced by the program contains a bootstrap for easy loading on disk. The program allows user-assigned naming of tapes. Disk-O-Tape requires at least 32 K bytes of programmable memory. The program comes on a floppy disk with Testape, a program to aid in adjusting the cassette recorder for optimum performance. Disk-O-Tape costs $12 from Dann McCreary, POB 16435-B, San Diego CA 92116.

Circle 683 on inquiry card.

Lifeboat Supports the Durango F-85

Lifeboat Associates has made available its 8080 software line formatted for the Durango F-85 computer. This software, which includes languages such as BASIC, COBOL, and Pascal; word-processing systems, such as Wordstar; communication software, such as BSTAM; and complete accounting packages, is available by the implementation of CP/M. The first version of CP/M supports the F-85 with up to four floppy-disk drives. This is priced at $170. Later versions will support the 12-megabyte and 25-megabyte hard-disk systems. Contact Lifeboat Associates, 1651 Third Ave, New York NY 10028, (212) 860-0300.

Circle 684 on inquiry card.

RECLAIM "Hides" Bad Sectors and Tracks from CP/M

Lifeboat Associates, 1651 Third Ave, New York NY 10028, (212) 860-0300, has announced a CP/M 2.0 utility program that tests floppy-disk and hard-disk systems for error-prone parts of the disk and allocates those parts to files that are invisible to the user. RECLAIM maps the bad spots out of the file directory so that they cannot be used again. It safely tests the disk with or without data files. At the completion of the program, it announces the number of blocks hidden from the file system. RECLAIM is available on all CP/M media formats supported by Lifeboat Associates. The cost is $80.

Circle 685 on inquiry card.


What's New?

SOFTWARE

Digital Synthesizer for the Apple

Mountain Computer Inc has developed the MusicSystem for the Apple II. This sixteen-voice digital synthesizer permits the creation of the sounds of real musical instruments utilizing the principle of additive synthesis. The generation of sounds is accomplished through programmable waveforms, envelopes, and amplitudes for each musical voice. Software is included for editing and playing of compositions. The editor program permits graphical input of sheet music utilizing standard music notation. The player program permits polyphonic performance of musical compositions. Stereo output is to user's stereo amplifier and speakers or directly off card with stereo headphones. For information, write or call Mountain Computer Inc, 300 Harvey W Blvd, Santa Cruz CA 95060, (408) 429-8600.

Circle 686 on inquiry card.

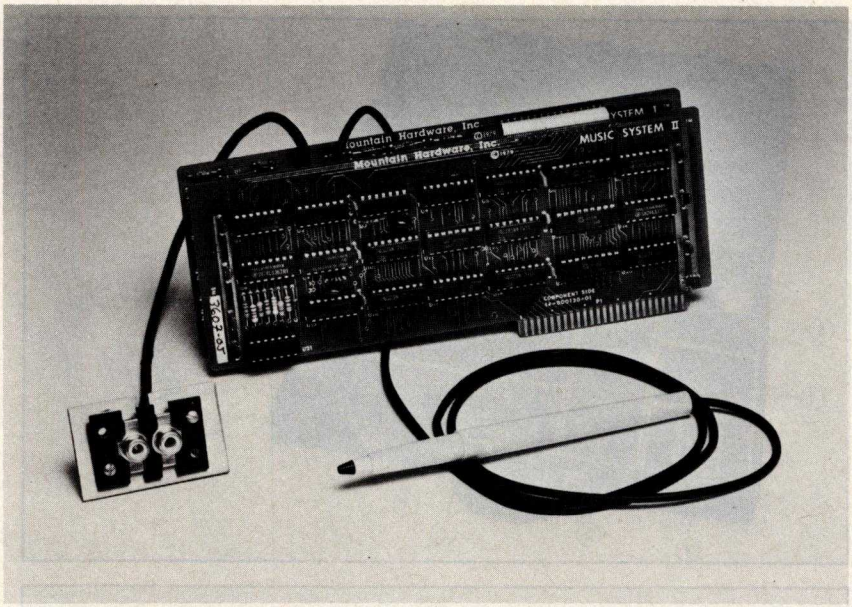

New Business Software for the TRS-80

American Business Systems (ABS) has announced that its line of financial- and business-applications software packages are now available to users of Radio Shack TRS-80 computers. These seven new ABS packages offer the same full-scale features and capabilities as the company's software for larger minicomputers and microcomputers.

The packages include a complete series of financial systems, ranging from Accounts Payable and Receivable through Payroll, Order Entry and Inventory Control to a fully automated General Ledger System. The application systems currently available include Financial Modeling and Real-Estate Sales Management. Additional packages soon to be released will offer a Client Accounting System and a Correspondence Management Package, which includes a letter writter, word processor and mailing-label generator.

Information is available from American Business Systems Inc, 439 Littleton Rd, Westford MA 01886, (617) 486-3509.

Circle 687 on inquiry card.

TRS-80 CP/M 2.0 with 12 Megabytes

Lifeboat Associates, 1651 Third Ave, NewYork NY 10028, (212) 860-0300, has announced the release of CP/M version 2.0 for the TRS-80 Model II. The system features extended density format for each of up to four floppy-disk drives. Nearly 2.5 megabytes of storage is possible with floppy-disk drives alone. The Corvus 10 megabyte Winchester hard disk is suggested as a storage system, allowing CP/M to access 12 megabytes of memory. A menu-driven configuration program allows total control of the parallel printer port and both serial ports of the TRS-80.

The printer port software can be set to control a "dumb" printer that has no page control, or the software page control can be disabled for printing checks or mailing labels. The system includes functions to set data rates of from 134.5 to 9600 bps (bits per second) for the serial ports. An ADM-3A emulation program is included which allows the TRS-80 to be used as a terminal through the serial ports. The system is offered with Corvus hard-disk capability for $250 and floppy-disk capability for $170.

Circle 688 on inquiry card.

Software for the Apple II

Softpoint, Dept C, 103 Clinton Ave, Terryville NY 11776, has announced cassette programs for the Apple II including Function Plot, Speed Reading, Road Race, and more. The programs utilize the Apple's high-resolution graphics capabilities. The prices range from $5.95 to $9.95.

Circle 689 on inquiry card.

Reformat for the TRS-80

Reformat is a programming aid to be used prior to compiling with the Microsoft BASIC compiler. The BASIC compiler allows the use of long variable names which can contain BASIC reserved words, making the format of a BASIC source file and the use of spaces critical. BASIC program files that are written as multistatement compressed lines will be rejected by the compiler in almost all cases. Bluebird's has developed this machine-language program which will reformat any TRS-80 BASIC source file into a format acceptable to the compiler. Reformat is available for $24.95 from Bluebird's Company 2267 23rd St, Wyandotte MI 48192, (313) 285-4455.

Circle 690 on inquiry card.


Data-Base Program for Z80 Systems


Condor Computer Corporation, 3989 Research Park Dr, Ann Arbor MI 48104, (313) 769-3988, has announced Target/80 DBMS, a data-base system for Z80 microcomputers. Target/80 is designed for transaction processing applications. This version uses nineteen commands, including relational operations for selecting, sorting, appending, or posting data. Target/80 is compatible with most Z80 systems with at least 48 K bytes of programmable memory running under CP/M. The price is $695.

Circle 691 on inquiry card.

What's New?

MISCELLANEOUS

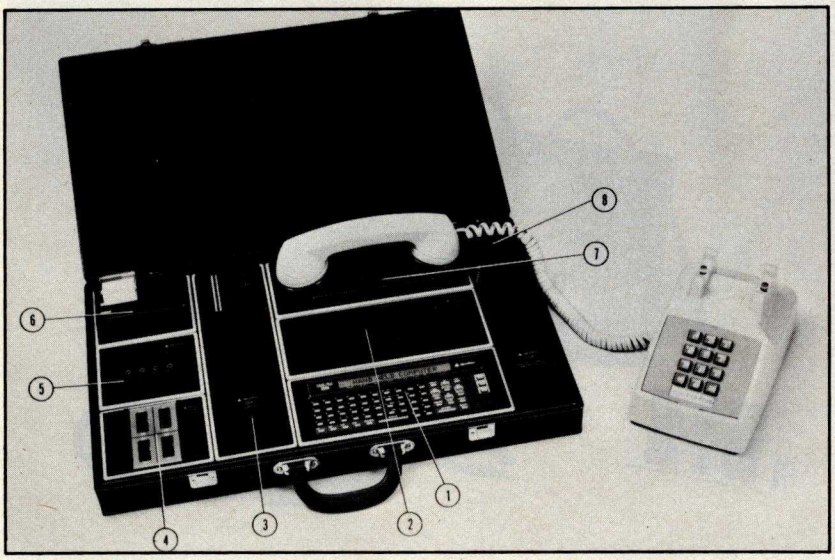

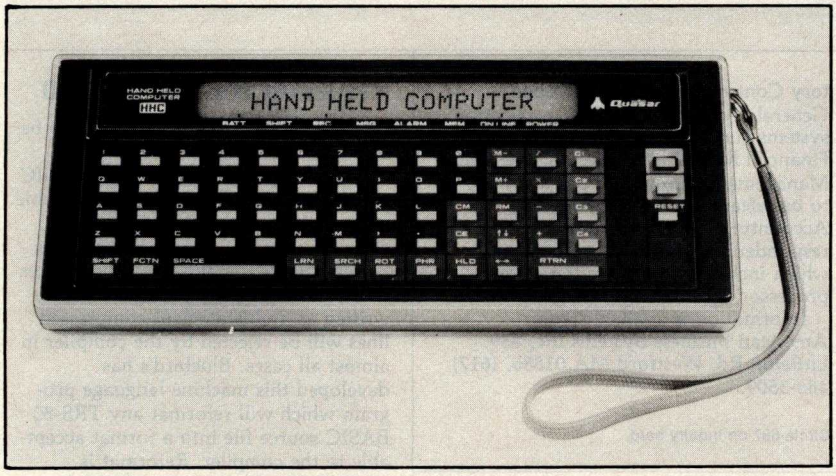

Computer in a Case


The Quasar Micro-Information System consists of a hand-held computer, video display, printer, modem, cassette deck, expandable programmable memory unit, I/O (input/output) driver—and it all fits in a briefcase. The hand-held computer fits in the palm of a hand, weighs less than a pound and controls the peripheral devices. A library of memory capsules in ROM (read-only memory) for use in the computer include fourteen languages, calorie counter, bar/wine guide, phonetic pronounciation, and games. The system is available from Quasar Company, Franklin Park IL 60131. Circle 692 on inquiry card.

Nine-Voice Synthesizer

Vista Media Products has announced the Music Machine Nine. Using LSI (large-scale integration) technology, the device can produce nine voices on the Apple II computer. The board uses three AY3-8910 integrated circuits and requires one expansion slot. It can use software now available to produce and play back nine-voice music compatible with other music boards. It will respond to commands for pitch, amplitude, duration, attack, delay, and more. Two high-impedance, low-level outputs are provided with six voices assigned to each channel. It is available through Advanced Computer Products, 1310 E Edinger, Santa Ana CA 92705, (714) 558-8813.

Circle 693 on inquiry card.

Logic Timing Recorder from A P Products



A P Products, 1359 W Jackson St, Painesville OH 44077, (800) 321-9668, in Ohio (216) 354-2101—collect, has introduced the Logic Timing Recorder, a device for charting logic timing. The unit is an ABS plastic board with 320 slides arranged in eight horizontal rows. The slides represent the two logic levels of a circuit. After the slides are manually moved into position to represent the logic state in a circuit, the board is checked for proper design, then it can be placed on a copying machine to make a permanent record for your files. The recorder may be used over and over again to chart the logic timing of all circuits. The Logic Timing Recorder, P/N 923758, has a suggested price of $44.95.

Circle 694 on inquiry card.

A/D Converter for S-100 Systems

The AIM-12 is a 16- or 32-channel 12-bit A/D (analog-to-digital) converter designed for laboratory and industrial applications. The card plugs directly into the standard IEEE S-100 bus. Features include an on-board resistor programmable instrumentation amplifier and operation of up to 25 ms with 12 bits of accuracy. The AIM-12 is I/O (input/output) mapped and can be used with either BASIC or assembly-language instructions. The module is designed for direct conversion of voltages from thermocouples, level sensors, pressure transducers, pH electrodes and other low-level signal sources. The device provides thirty-two single-ended or sixteen fully differential inputs; input impedance exceeds one billion ohms. It is fully compatible with North Star, Cromemco, and most S-100 system. Multiple boards can be employed, and BASIC and assembly-language programs are supplied. The price of the AIM-12 is from $575, depending on options, from Dual Systems Control Corporation, 1825 Eastshore Hwy, Berkeley CA 94710, (415) 549-3854. Circle 695 on inquiry card.

Speed up your PET programming with The BASIC Programmer's Toolkit,™ now only $39.95.

Don't waste valuable programming time if there's an easier way to go. Here it is: The BASIC Programmer's Toolkit, created by Palo Alto ICs, a division of Nestar. The Toolkit is a set of super programming aids designed to enhance the writing, debugging and enhancing of BASIC programs for your PET.

Increase your PET's IQ™ for $39.95!

The BASIC Programmer's Toolkit has two kilobytes of ROM firmware on a single chip. This extra ROM store lets you avoid loading tapes or giving up valuable RAM storage. It plugs into a socket inside your PET system, or is mounted on a circuit board attached on the side of your PET, depending on which model you own.

There are basically two versions of PET. To determine which Toolkit you need, just turn on your PET. If you see ***COMMODORE BASIC*** your PET uses the TK-80P Toolkit. If you see ###COMMODORE BASIC###, your PET uses the TK-160 Toolkit. Other versions of the BASIC Programmer's Toolkit are available for PET systems that have been upgraded with additional memory.

How Toolkit makes your programming easier:

FIND locates and displays the BASIC program lines that contain a specified string, variable or keyword. If you were to type *FIND A$,100–500,* your PET's screen would display all lines between line numbers 100 and 500 that contain *A$.*

RENUMBER renumbers the entire program currently in your PET. You can instantly change all line numbers and all references to those numbers. For instance, to start the line numbers with 500 instead of 100, just use *RENUMBER 500.*

HELP is used when your program stops due to an error. Type *HELP,* and the line on which the error occurs will be shown. The erroneous portion of the line will be indicated in reverse video on the screen.

These simple commands, and the other seven listed on the screen, take the drudgery out of program development work. And for a very low cost. The BASIC Programmer's Toolkit costs as little as $39.95, or at most, $59.95.

Get the BASIC Programmer's Toolkit and find out how quick and easy program development can be. See your local PET dealer or send this coupon in today.



PALO ALTO ICs
A Division of Nestar Systems, Incorporated

PET™ is a trademark of Commodore Business Machines, Inc. The BASIC Programmer's Toolkit™ is a trademark of Palo Alto ICs, a division of Nestar Systems, Inc.

The Toolkit is fully assembled. It is not a kit and requires no special tools to install.

I want to save programming time and money.
Send me The BASIC Programmer's Toolkit that will give my PET 10 new and useful commands.
Fill in the appropriate line below:

Qty._____ TK-160 Toolkit(s) @ $39.95 each

Qty._____ TK-80P Toolkit(s) @ $59.95 each

Want to charge it? Call (415) 493-TOOL, or fill out the form below.

Enclosed is a ☐ money order ☐ check

(If charging): ☐ Bill VISA ☐ Bill Master Card.

Charge Card_____ Exp. Date_____

Master Card Interbank Number_____

Signature_____

Please include the amount of the Toolkit, plus $2.50 for shipping and handling. Please allow 4–6 weeks for delivery. SATISFACTION GUARANTEED, OR SEND IT BACK WITHIN 10 DAYS OF RECEIPT AND PALO ALTO ICs WILL REFUND YOUR MONEY.

SEND TO:

Name_____

Address_____

City_____ State_____ Zip_____

Phone_____

MAIL TO: Palo Alto ICs
A Division of Nestar Systems, Inc.
430 Sherman Avenue
Palo Alto, CA 94306
(415) 493-TOOL

Dealer inquiries invited.

Circle 281 on inquiry card.

OSI'ers!

OSI DIDN'T FILL YOU IN... WE WILL...




With the Complete, New OS-65D V3.2 Disassembly Manual.

- 60 pages of listings
- Includes full cross-reference listing

Order today. Send check for $24.95 to Software Consultants, 7053 Rose Trail, Memphis, Tenn. 38134. 901-377-3503. Postpaid. Allow 2-3 weeks.

Circle 282 on inquiry card.



8K BYTE STATIC RAM MODULE FOR THE 6800; COMPATIBLE WITH THE MOTOROLA EXORciser* BUS AND D-2 KIT.
TWO SEPARATE 4k ADDRESSES; EACH MAY BE USED AS RAM OR TREATED AS ROM.
SWITCHES SET ADDRESSES AND CONTROL RAM/ROM OPTION.
ALL IC's ARE SOCKETED; EACH IC HAS A BYPASS CAPACITOR.
ACCESS TIME: 450 NSEC.
DIMENSIONS: HEIGHT 8.425IN. WIDTH 9.750 IN. THICKNESS .062 IN.
SIGNALS: R/W, VMA OR VUA (JUMPER), Ø2
STATIC RAM: LOW POWER 2102AN 4L OR EQUIVALENT.
THE ALI688K COMES ASSEMBLED AND TESTED.

PRICE $175

APPLIED LOGIC, INC
P.O. BOX 328
JAMAICA, NEW YORK 11415
(212) 459-4064

*EXORciser is a trademark of Motorola, Inc.

Circle 283 on inquiry card.

Now you can afford quality!



Scotch® DISKETTES

SAVE 30% TO 45%!

Possibly the LOWEST prices you'll find on quality SCOTCH Brand Diskettes in sizes to fit all Mini/Micro Computers. One box or by the case, all orders are processed quickly and shipped per your instructions.


Call COLLECT to Order!
(805) 484-8146

QUALITY DATA SUPPLY
P.O. Box 236, Camarillo, CA 93010

Authorized Distributor
Information Processing Products **3M**

Circle 284 on inquiry card.

NEW **S-100 A/D**



- S-100 Bus Compatible A/D Converter
- 12 Bit Accuracy
- 16 Channel Analog Input
- Programmable Gain Amplifier with Sample-and-Hold
- High Quality Commercial/ Industrial Construction

2 and 4 Channel, 12 Bit D/A Boards also available.

CDC **CALIFORNIA DATA CORPORATION**
3475 Old Conejo Road, Suite C10
Newbury Park, California 91320
(805) 498-3651

Circle 285 on inquiry card.

80X24 VIDEOTERM™
7X9 MATRIX DISPLAY FOR
LOWER CASE W/ DESCENDERS APPLE II®



® REGISTERED TRADE MARK OF APPLE COMPUTER INC.

80 columns by 24 lines with easy to read 7x9 dot matrix, upper and lower case with descenders using shift lock feature • 1K firmware incorporates PASCAL and BASIC protocalls so user is not required to enter machine language programs or change PASCALS. Misc. info. or Gotoxy files • Compatible with all APPLE II peripherals so user won't need new software patches for future software products • Crystal controlled dot clock for excellent character stability • VIDEOTERM is the same size as the Apple language card and power consumption is held to a minimum through the use of CMOS and lower power devices • Character set can be user definable up to a maximum of 128 symbols of 8x16 dot matrix font • Display control character mode and four standard display formats controlled by escape sequences • Built in light pen capability • Inverse display mode • 50/60 HZ operation • Sockets on all IC's.

PRICE:Without graphic EPROM $345
OPTIONS: Graphics EPROM line dwg. $25
VIDEO SWITCH PLATE, inserts in case slot to choose between APPLE II® and VIDEOTERM $12
MANUAL: $15

Videx

VIDEX 3060 N.W. Thistle Pl. Corvallis, OR 97330 Phone (503) 758-0521

Circle 286 on inquiry card.

APPLE][™
A/D INTERFACE BOARD

- 8 CHANNELS
- 8 BITS
- 65 μS CONVERSION
- ON BOARD REFERENCE

$99.50 + $2.50 SHIPPING
($5.00 SHIPPING FOREIGN)

TRENDCOM 100™
GRAPHICS UPGRADE KIT

- TGU1 - FOR PRINTERS WITH SELF-TEST JUMPER
- TGU2 - FOR PRINTERS WITH SELF-TEST SWITCH
- APPLE][HIRES DUMP SOFTWARE

$59.95 + $2.50 SHIPPING
($5.00 SHIPPING FOREIGN)

SEC STREET ELECTRONICS CORPORATION
8900 SW BURNHAM, #F9
TIGARD, OR 97223 (503) 620-2713

Circle 287 on inquiry card.

HARD DISC STORAGE FOR THE S100 BUS

PS100	S100 HARD DISC CONTROLLER	$695
533	33MB DISC SUBSYSTEM *ADES PS100 Controller, Priam 3350 Winchester Disc, Case, Power Supply & CBIOS for CPM*2.2*	$4495
510	10MB DISC SUBSYSTEM *ADES PS100 Controller, Priam 1070 Winchester Disc, Case, Power Supply & CBIOS for CPM 2.2*	$3495
PS100	USERS MANUAL	$10
533	USERS MANUAL	$15
510	USERS MANUAL	$15
533CBIOS	BIOS *CPM Diskette for use with CPM 2.2 and 533 Subsystem*	$25
510CBIOS	BIOS *for CPM 2.2 and 510 Subsystem*	$25

FOR PRODUCT DATA SHEETS WRITE:
ADAPTIVE DATA & ENERGY SYSTEMS
2627 Pomona Boulevard
Pomona, CA 91766
Phone: (714) 523-9653

DEALER INQUIRIES WELCOMED

*REGISTERED TRADEMARK OF DIGITAL RESEARCH

A009110

Circle 288 on inquiry card.

attention apple® owners

DOUBLE THE CAPACITY OF YOUR DISK


THIS KIT ALLOWS YOU TO WRITE AND READ ON BOTH SIDES OF YOUR APPLE FLOPPY DISK

DOES NOT AFFECT DISK DRIVE RELIABILITY

EASILY INSTALLED IN 15 MINUTES
DOUBLE FLOPPY DISK CAPACITY FROM 116K to 232K BYTES

SPECIAL INTRODUCTORY OFFER

ONLY $9.95 plus $1.00 postage



autometrics inc.
8999 KINGS HILL DR.
SANDY, UT. 84070

Circle 289 on inquiry card.

TIME!

FOR YOUR S-100 COMPUTER!

The COMPUTIMER™ by rmi features

- **4 independent interval timers and calendar clocks**
- **all cascadable and synchronous**
- **0 – 1/2 million year range with 1.0 microsecond – 10 second resolution**
- **vectored interrupts**
- **completely software controlled**
- **assembled, tested, and delivered with sample software and instruction manual, $238**

IDEAL FOR SCIENTIFIC, ENGINEERING, MEDICAL AND HOBBY APPLICATIONS!

rmi
san carlos,CA

Circle 290 on inquiry card.

MICRO BUSINESS WORLD™ MAIL ORDER

Immediate response to your orders (verbal or written). toll-free (800) 421-0347



apple® II . . . Apple II *plus* and the NEW Apple III

The complete, ready to run computers . . . Connect to your color TV and start writing programs today. APPLE is faster, smaller, more powerful than it's predecessors. APPLE will change the way you think about computers. **Call for our Price.**

INVENTORY CONTROL SYSTEM FOR Apple II


The first truly professional system that can tackle up to 8,100 items • Transaction register/audit trail • Inventory Status report • Re-order report • Keeps track of purchase orders automatically • Will handle multiple departments or divisions

Fast data retrival.

Minimum hardware requirements: APPLE II Plus with 48K, one disk drive and 80 column printer.

Introductory Price: $99.00 Including comprehensive manual.

ZENITH DATA SYSTEMS:
Smart Video Terminal




Z-89 Computer System:
includes: Z19 Display, a built in 5¼" Floppy Disk, 2 serial ports, and 16K of memory. **2295.00** 48K Memory **2595.00**
Also 48K Z-19 has a Z80 Micro -processor, numeric keypad and 8 function key. **895.00**

ATARI 800 Personal Computer System
Packed with: Computer Console, Basic Language Card, Education System Master Cartridge, Cassette Recorder, TV Modulator, 8K Memory (expandable to 48K), Power Supply & all Books and Manuals **$799.95**

ATARI 400 Personal Computer System for less
Packed with: Computer Console, Basic Language Cartridge, Power Supply, TV Modulator, and all Books and Manuals **$499.95**

ATARI Program Recorder **69.99**
ATARI Software, Roms, Cassettes 25% off list price
ATARI Expansion Memory 8K Module **99.99**
16K Module **169.99**

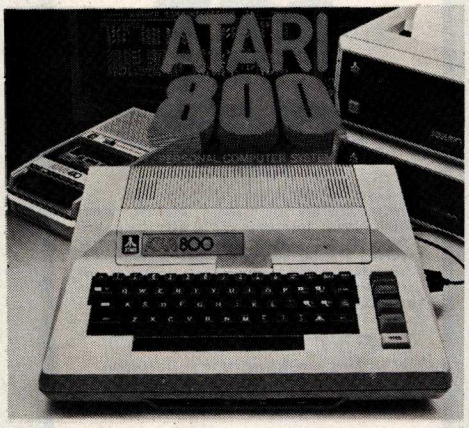


commodore the Great American Solution



CBM 8000 SERIES BUSINESS COMPUTER



CBM 8050 DUAL DRIVE FLOPPY DISK



CBM 2022 TRACTOR PRINTER



CBM 2001 SERIES BUSINESS COMPUTER

EPSON MX-80
DOT MATRIX PRINTER

The new Model MX 80 is a high-speed bidirectional, impact printer capable of printing 9x9 dot matrix characters. Prints enlarged, condensed, condensed/enlarged, normal characters with 40,132, 66, 80 columns per line logical seeking function.

$645.



EPSON TX-80 . . .
DOT MATRIX PRINTER
with graphics **$795.**



DYSAN DISKETTES

THE CADILLAC OF THE FLOPPY DISKS AT LOW LOW PRICES

8" (BOX OF 10) • 3740/1 sgl side/ sgl density . . . . . **4.50 ea**
• 3740/1D sgl side/ dbl density . . . . . **6.95 ea**

5" (BOX OF 5) • **104/1 soft sector** • **107/1 10 sectors**
• **105/1 16 sectors** . . . . . **4.50 ea**

16K RAM set of 8 4116's
250 ns or better **$59.00**

Prices subject to change without notice.
VISA and MASTER CHARGE WELCOME. Allow 2 weeks for cashiers check to clear, 4 weeks for personal checks. Add 2% for shipping and handling. Calif. residents add 6% sales tax. (Sorry, no C.O.D.)

U.S. and International dealer inquiries invited.

Copyright 1980 • MICRO Business WORLD **Circle 291 on inquiry card.**

MICRO BUSINESS WORLD™
15818 Hawthorne Boulevard
Lawndale, California 90260 (213) **371-1660**

6800 Family Software



SOFTWARE: WIZRD multitasking DOS, editor, assembler, C, PL/W, PASCAL, FORTRAN, 12K BASIC

FIRMWARE: FANTOM monitor/debugger, MATH long integer and floating point, 4K industrial BASIC

CROSS SOFTWARE: Assembler, PL/W, linker, math/science, simulator

WINTEK

Wintek Corp.
1801 South Street
Lafayette, IN 47904
317-742-8428

Circle 292 on inquiry card.

H8 OWNERS

APU-H ARITHMETIC PROCESSOR CARD

- ADDS POWERFUL MATH CAPABILITY TO H8
- 32 BIT FLOATING POINT OPERATION
- 16 AND 32 BIT FIXED POINT OPERATION
- ADD, SUBTRACT, MULTIPLY AND DIVIDE
- TRIG, LOG, EXP, SQUARE ROOT AND MORE
- BASIC INTERFACE PROVIDED
- USES SINGLE H8 CARD SLOT
- FULL DOCUMENTATION
- ASSEMBLED AND TESTED
- VISA AND MASTER CHARGE ACCEPTED

$389.00

CCM, INC

P.O. BOX 2308 RESTON VA 22091
Phone orders (703) 620-3403

Circle 293 on inquiry card.

PRINTERS

MICROTEK MT-80
—S LIST $895 **OUR PRICE $775**
—P LIST $795 **OUR PRICE $685**

OKIDATA MT-80
LIST $800 **OUR PRICE $650**

BASE$_2$ MODEL 800B
LIST $699 **OUR PRICE $575**

PLEASE ADD 3% FOR S&H TO ORDER

TECHNICAL INNOVATIONS
P.O. BOX 803 DEPT. B
HILLSBORO, OR 97123
503-648-6423

Circle 294 on inquiry card.

PET music BOARD

At last! A music maker for your PET. Our system consists of a small circuit board which plugs into your PET's user port and connects either to a speaker or your hi-fi system (cable included). Our software (on cassette) lets you enter, save, and playback music in up to four voices, each with its own tone colour. Also included are several sample pieces to get you started. When ordering, please specify 8k, 16k, or 32k PET version.
$49 without amp (plugs into your stereo)
$54 with amp (connects to a speaker)
Please use certified cheque or money order.

Electronic Music Systems
45 Livingston Rd. Suite 501
West Hill, Ontario, Canada
M1E 1K8

*PET is a trademark of Commodore B.M.

Circle 295 on inquiry card.

16K DYNAMIC RAM

T1 4116 16Kx1 RAMS

8 FOR $32.00 32 FOR $120.00

THIS IS A SPECIAL PURCHASE OF NEW T.I. 300 N.S. DYNAMIC RAMS.


These are factory spec. parts, not surplus. These parts will work with most memory boards as well as memory expansion for TRS-80, APPLE, EXIDY, etc.

HANLEY ENGINEERING
P.O. BOX 21432
SEATTLE, WASH. 98111
(206) 633-3404

Circle 296 on inquiry card.

dy/an Dysan CORPORATION

Solve your disc problems, buy 100% surface tested Dysan diskettes. All orders shipped from stock, within 24 hours. Call toll FREE (800) 235-4137 for prices and information. Visa and Master Card accepted. All orders sent postage paid.



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

Circle 297 on inquiry card.

S-100 VOICE

The ARTICULATOR board allows you to record, store, and playback any vocabulary on your S-100 computer. Input speech is digitized by the ARTICULATOR and sent to the computer via an on-board port for storage at 1K to 2K bytes/sec. This data is then sent back from the computer to the ARTICULATOR for very high quality playback. On-board VOX switching minimizes memory storage requirements.

PRICE — $319 A&T
AVAILABLE NOW

Quintrex, Inc., 9185 Bond
Shawnee Mission, Ks. 66215
(913) 888-3353

Circle 298 on inquiry card.

ATTENTION: Apple Users!

WANT BETTER COLOR...MORE STABILITY?

1776* *1980

Ever question the quality of your computer display. If so, you've probably been told "That's the best you can expect from an RF modulator...buy a color monitor".

WE CHALLENGE THAT STATEMENT!

DON'T BE SATISFIED WITH EXISTING QUALITY. See for yourself what our "new concepts" modulator can do for your picture...MICRO-VERTER Model MVX-500, $35 P.P. Phone orders welcomed.

HOT LINE DIAL: 402-987-3771

13B BROADWAY ATV Research DAKOTA CITY, NE. 68731

DEALERSHIPS AVAILABLE

CATALOG UPON REQUEST

Circle 299 on inquiry card.

FIFTY BUS SYSTEMS

32K 6800s from **$1694.59**
32K 6809s from **$1844.69**
Include: Chassis, CPU, 32K Static Ram, I/Os
Fully Expandable

2114L 300ns **STATIC RAM CHIPS . . $5.90**

FACTORY PRIME From the same shipment we use in our professional quality boards.
Add $5.00 Handling on Orders Under $200.00

32K STATIC RAM BOARD

FOR THE SS50 AND SS50C BUS (SWTP etc.)

- SS50C Extended Addressing (can be disabled).
- 4 separate 8K blocks
- Socketed for 32K
- Gold Bus Connectors
- Low power 2114L RAMS
- Write Protect

16K **$328.12**
24K **$438.14**
32K **$548.15**

Phone, write, or see your dealer for details and prices on our broad range of Boards and Systems for the SS50/SS50C BUS including our ***UNIQUE 80 x 24 VIDEO BOARD,*** and our AC Power Control Products for all computers.


GIMIX inc.

1337 W. 37th Place • Chicago, IL 60609
(312) 927-5510 • TWX 910-221-4055
The Company that delivers.
Quality Electronic products since 1975.
GIMIX® and GHOST® are Registered Trademarks of GIMIX INC.

Circle 300 on inquiry card.

FOR APPLE II AND APPLE II PLUS COMPUTERS

DoubleVision™

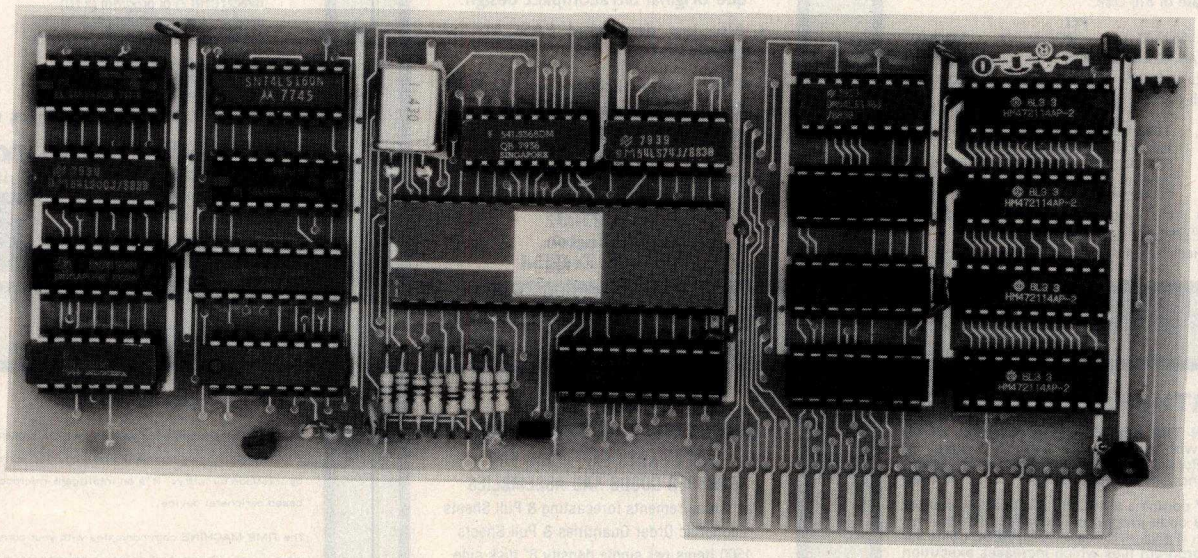

80 x 24 Video Display with Upper and Lower Case

COLUMNS LINES

• is a hardware board that may be plugged into any slot in Apple II or Apple II Plus 32K or 48K Disks • full 128 ASCII character set, including control characters • fully programmable cursor • built in light pen capability • inverse video • full cursor control • works with 50/60Hz • has 2k of its own screen memory • has its own video output jack that must be connected to a monitor (or a high band width black & white TV thru a good RF modulator). Color TV's produce a poor display and are not recommended. • permits you to connect another monitor (or a T.V. set thru RFmod) to the Apple video output jack • displays 24 lines of 80 column text — programmable for different values • permits you to have graphics on Apple video output • video output and Apple video output may be connected to one monitor thru optional video switch • is active only when addressed for reading from or writing to • accepts lower case input from keyboard by use of escape key. (no modification required) or direct use of shift key (1-wire connection from shift key pad to DoubleVision required). • is compatible with the latest version of various word processing software packages. Presently these include Apple-pie 2.0— Programma International, Easywriter Professional system—Informational Unlimited, Text Editor/Formatter—Peripheral's Unltd. (when ordering from these companies, please ask for versions compatible with DoubleVision). All software available from Computer Stop when released. • Peripheral's Unltd. B.I.T.S. and P.I.T.S. and Southeastern Software's "DATA CAPTURE" with Micromodem and communication card. These packages give ability to upload, transfer and download files from remote computers, and all at 80 columns! • Programma Int. latest assembler LISA V:20 will support full 80 column display • is transparent for use with Basic and Pascal • software on disk for easy modification and adaptation for different applications • completely commented source listing of software and hardware schematics available • PASCAL (optional) • becomes the console when installed in Pascal • Permits 80 column text processing with full upper/lower case while using Pascal's editor • must be plugged into slot 3 when operating with Pascal

Available now at your local computer store. $295.00

Call Computer Stop for Store nearest you

Shipping, Insurance, Handling, extra

Calif. Residents add 6% Sales Tax

*Apple is a Registered TM of Apple Computers, Inc.

Dealer inquiries invited.
Contact:

COMPUTER STOP CORP.
2545 West 237th St.
Suite L
Torrance, CA 90505
539-7671

The Computer Stop
16919 Hawthorne Blvd.
Lawndale, CA 90260
(213) 371-4010

MON. - SAT.
10-6

Circle 301 on inquiry card.

ATARI®

Atari 800 ..... $810.00 810 Disk Drive .. $525.00
16K RAM Module $150.00 Controllers ..... $18/Pr.
All ROM's, Including STAR RAIDERS, 20% OFF!!!

Bit Bucket software for the ATARI

Disassembler/dumper/
depositer/BASIC renumber $30.00
Action Games ... $25.00 Brain Games ... $25.00
All above Bit Bucket software FREE with purchase of ATARI 800.
Free utilities disk (disasm, renumber, etc.) with purchase of 810 Disk.

PET

8K ....$699.00 16K ...$876.00 32K ...$1140.00

CAT Modems ..... $156.00!

Soroc IQ120 Terminals $775.00

All Centronics Printers 15% OFF!!

The Bit Bucket
168 North Beacon Street
P.O. Box 365
Newton Highlands, MA 02161
Phone: (617) 783-3144

See us at the Northeast Computer Show in Boston November 20-23

All prices subject to change without notice.

Circle 302 on inquiry card.

1802 USERS

Original innovations from the other side of the world.

1. Micro-basic for 1802 micro-systems. Uses only 1K of memory and HEX key pads. The world's smallest!
2. HUG 1802 microprocessor full color 7K on board memory. Unique original ultracompact design.
3. Also just developed PASCAL for 1802.
4. 1802 owners contact us for *FREE* data on Australasian developed innovations never before published.

Write to: **Kit Parts, Ltd.**
Dept B
Box 27037
Wellington,
New Zealand

Circle 303 on inquiry card.

ATARI OWNERS
SCREEN PRINT INTERFACE

Obtain hardcopy of any screen image (graphics and/or text) on either a TRENDCOM 200 or IDS 440 Paper Tiger printer. Simply attach the supplied parallel printer cable and load the software from cassette (may be transferred to Disk). Obtain a "picture" of the screen on your printer under direct (CTRL?) or program (XIO) control. Works in all graphics/text modes as well as LPRINT and LIST "P:"

Only $139

California residents add 6% tax

MACROTRONICS, inc.®
1125 N. Golden State Blvd. / Suite G
Turlock, CA 95380 (A)
(209) 667-2888 / 634-8888

We are experiencing telephone difficulties, please keep trying.

Circle 304 on inquiry card.

NORTHSTAR SOFTWARE

FUN ON THE HORIZON is a collection of 40 games with average size over 200 lines. Includes Poker, Golf, Football, Biorhythm, Blackjack, Keno, Life and 33 more $24.00

UTILITY contains a Z80/8080 Disassembler for machine code programs resident in RAM or on diskette. It also includes a COMPRESS utility for BASIC program files which increases execution speed while decreasing program size as much as 35% $17.00

SUPRTREK, a space battle game, features action graphics and an updated play-by-play display map of the galaxy. Over 900 lines of code $11.00

All programs use the 64 character ASCII subset with max line length 64 characters. Available in double or single density on 1 or 2 (SD) specially modified double-sided diskettes. (SD, add $4.00 per order)

COMBINATION PRICE: All three packages for $36.00

Order now from S&S Computing, Inc.
64 Juniper Street
Allentown, Pa. 18106
(215) 398-1299

or circle our reader service number below to receive 4 pages of program abstracts and sample output.

Circle 305 on inquiry card.

INVENTORY CONTROL SYSTEM
WITH PARTS EXPLOSION FOR FINISHED GOODS AND ASSEMBLIES

Parts requirements forecasting & Pull Sheets
Economic Order Quantities & Pull Sheets
1500 Items per single density 8" disk side

AVAILABLE FOR CROMEMCO, CP/M, AND OASIS OPERATING SYSTEMS

Hardware requirements: 64k RAM, 132 Column printer. Manual (Includes Source) and 8" floppy disk ... $250. Accounts Receivable, Accounts Payable, General Ledger, Payroll and Mailing List programs also available.

FEITH SOFTWARE, INC.
CEDARBROOK A-1103
WYNCOTE, PA. 19095
(215) 887-9780

Circle 306 on inquiry card.

!! REAL TIME !!

The TIME MACHINE from ALPHA OMEGA COMPUTER SYSTEMS isn't just another digital clock chip surrounded by interface circuitry. It's an intelligent microcomputer based peripheral device.

The TIME MACHINE communicates with your computer via a serial I/O port at a user selectable data rate between 300 and 2400 baud. RS-232, RS-422, or current loop communication may be used.

Battery protection against power loss is included. The TIME MACHINE automatically computes day of the week and leap year. Buffered output pulses at one second, one minute, and one hour intervals are provided.

Dimensions are 2.5 x 4.75 x 7.5 inches. Batteries, power supply, and communication cable are included.

Price is only $450 single lot and quantity discounts are available. Dealer inquiries invited. Off the shelf delivery.

ALPHA OMEGA COMPUTER SYSTEMS, INC.
P.O. Box 727 / Corvallis, Oregon 97330
Industrial Computer and Control Systems
(503) 754-1911

Circle 307 on inquiry card.

ARE YOU LOOKING FOR AN
ACOUSTIC MODEM?
THEN TEAR THIS OUT, YOU WON'T SEE IT AGAIN! ! !

BELL 103, 300 BAUD,
ORIGINATE MODE,
RS-232 INTERFACE,
BUILT FOR TI-733,
TESTED AND GUARANTEED.
LIMITED QUANTITY

CARD & COUPLER: $ 89.00
w/*CUSTOM CASE:* $109.00
w/*CASE & POWER:* $124.00
ADD $3.00 FOR SHIPPING.

Creative Mind Businesses
P.O. Box 18252 • Tucson, Az 85731

Circle 308 on inquiry card.

FREE
CATALOGS

Software (over 400 programs for Apple, Pet, TRS-80, Sorcerer, Sol, Challenger and CP/M systems)

Books (over 100 titles on personal, recreational and educational applications of small computers.

Peripherals (ALF music synthesizer and VersaWriter for the Apple II)

Peripherals Plus
119 Maple Avenue
Morristown, NJ 07960

Circle 309 on inquiry card.

C C S INC

1011 So Rancho Dr
Las Vegas, Nevada

(702) 384-0067

TURNKEY SYSTEMS
AVAILABLE TODAY

•MEDICAL BILLING•
•WORD PROCESSING•
•UNIVERSITY ADMISSIONS•
•POINT OF SALES•

FREE TRAINING
CALL TODAY

Circle 310 on inquiry card.

asap computer products, inc.

11542-1 KNOTT
DEPT. C
GARDEN GROVE,
CA 92641
(800) 854-6411
(714) 891-2663

ORDERING INFO

NAME, ADDRESS, PHONE
SHIP BY: UPS OR MAIL
SHIPPING CHRG. ADD
$2.00 UP TO (5) LBS.
$25.00 Minimum Order

TERMS

WE ACCEPT CASH,
CHECK MONEY ORDERS,
VISA & MASTER CHRG.
(U.S. FUNDS ONLY)
TAX: 6% CALIF. RES.

ATARI MODEL #800
(NEW 16K VERSION)

- COMPUTER CONSOLE
- ATARI BASIC 8K ROM
- 57 FULL STROKE ALPHANUMERIC KEYS PLUS 4 FUNCTION KEYS
- INVITATION TO PROGRAMMING CASSETTE
- OPERATORS MANUAL
- EDUCATION SYSTEMS MASTER
- JOYSTICKS
- RF MODULATOR
- POWER SUPPLY

CALL FOR PRICE
(IN STOCK)

10% OFF SOFTWARE WITH PURCHASE

ANACOM GENERAL MODEL - 150 PRINTER

- 9 x 9 Matrix
- Impact Dot
- 150 CPS.
- 10 CPI
- 136 Columns
- 94 ASCII Character
- 6 or 8 Lines per Inch
- Pin Feed & Dual Tractor Drive
- RS-232 or Parallel Interface

CALL FOR PRICE

STATIC & DYNAMIC RAM CHIPS

2104's
(4K) DYNAMICS
$2.00 ea.

5257-3L
(4K) STATIC
$5.25 ea.

ATARI OPTIONAL ACCESSORIES

MODEL #810 DISK DRIVE SYSTEM
MODEL #820 40-COL. DOT MATRIX PRINTER
MODEL #822 40-COL. THERMAL PRINTER
MODEL #825 80-COL. DOT MATRIX PRINTER
MODEL #830 ACOUSTIC MODEM
MODEL #850 INTERFACE MODULE
MODEL #CX853 16K RAM MODULE
CALL FOR PRICE & AVAILABILITY

2114L-3
LO PWR./300NS

1-16 . . . 4.25
17-49 . . . 4.00
50-99 . . . 3.80
100 Up . . 3.60

IN STOCK

4116's
ADD-ON MEMORY
APPLE, TRS-80, HEATH, ETC.

(200NS) 8 for $39.00
16 for $75.00

(250NS) 8 for $37.00
16 for $70.00

2708's
(450 ns.)
$7.50 ea.
OR
8/ $56.00

ATARI SOFTWARE & ACCESSORIES

BASKETBALL ROM	$30.00
SUPER-BREAKOUT ROM	$30.00
STAR RAIDERS ROM	$45.00
CHESS ROM	$30.00
VIDEO EASEL ROM	$30.00
MUSIC COMPOSER ROM	$45.00
3D TIC TAC TOE ROM	$30.00
JOYSTICKS	$18.00
PADDLE CONTROLS	$18.00
#410 CASSETTE RECORDER	$60.00

S.D. SYSTEMS
NOW AVAILABLE

- EXPANDORAM I & II
- VERSAFLOPPY
- SBC100/SBC200
- VDB 8024 VIDEO BOARD
- PROM-100 PROGRAMMER

KITS & A&T CALL FOR PRICE

MICROBYTE 32K
STATIC RAM BOARD

- IEEE/S-100 COMPATIBLE
- 4K BANK ADDRESSABLE TO ANY 4K SLOT WITHIN 64K BOUNDARY
- ON BOARD 8-BIT OUTPUT PORT
- NO DMA RESTRICTIONS
- 4 MHZ OPERATION

ASSEMBLED & TESTED $475.00

2716's
5 VOLT ONLY
450 ns.
$15.00
(PRIME)

MICROBYTE
(NEW PRODUCTS)

- Z-80 CPU/IO BOARD
- DBL. DENSITY DISK CONTROLLER
- 64K DYNAMIC RAM BD.
- 4 PORT I/O BD.
- MICRO Z SYSTEM
- D^2 DISK SYSTEM

ALL ASSEMBLED & TESTED
CALL FOR PRICE & DELIVERY

CENTRONICS
MODEL #737

- 80 CPS Proportional Spaced
- Dot Matrix (7 x 9) or (7 x 8)
- 96 Character ASCII
- Parallel Interface

$825.00

8080A
(CERAMIC)
$2.50 ea.

CAPACITORS
.1 @ 12 VOLTS
CERAMIC
11¢ ea.
100/$10.00

ANADEX PRINTERS

MODEL #DP8000	CALL FOR
MODEL #DP8000 (APPE)	PRICE
MODEL #DP9500	&
MODEL #DP9501	DELIVERY

FEATURES ON DP8000:

- 80 COLUMNS, 112 CPS, BI-DIRECTIONAL, SPROCKET FEED, 9x7 CHARACTER FONT, VARIABLE FORM WIDTH

VERBATIAM
5¼''
SOFT-SECTOR DISKETTS
BOX OF (10)
$29.95

RS232 CONNECTORS

	1-9	10-24	25 Up
DB25P	2.99	2.75	2.45
DB25S	3.80	3.70	3.60

IMSAI CONNECTORS
100 PIN GOLD-SOLDERTAIL
$2.50 ea.
OR
10/$2.30 ea.

NEW PRODUCTS AVAILABLE

- COMMODORE
- GODBOUT
- LEEDEX
- PERSONAL SOFTWARE
- SANYO
- SOROC
- TEXAS INST.

CALL FOR PRICES

320T-5	.90
320T-12	.80
340T-5	.75
340T-12	.65
78HO5	5.25

LO-PRO SOCKETS

	1-99	100 UP
14 PIN	.10	.09
16 PIN	.12	.11
18 PIN	.15	.13
20 PIN	.23	.21
24 PIN	.26	.24
28 PIN	.30	.28
40 PIN	.42	.40

Z-80A
CPU CHIP
NEC #D780C-1
$10.00 ea.

QUME DT-8
DOUBLE-SIDED/ SGL/DBL DENSITY 8" DISK DRIVES
CALL FOR PRICE

COMPONENTS

74LS240	$1.50
74LS241	$1.40
74LS244	$1.50
74LS373	$1.60
74LS374	$1.60

SHUGART SA801R
Bare Drives
Single Sided/ Sgl/Dbl Density
CALL FOR PRICE AND DELIVERY

SA 800/801 DISK DRIVE
1 OR 2 DRIVES INSTALLED, SGL. OR DBL. DENSITY/SGL.-SIDED, METAL CABINET, & POWER SUPPLY
(1) SA800/$775.00 (2) SA800/$1250.00
(1) SA801/$795.00 (2) SA801/$1295.00
1 YR. WARRANTY PARTS & LABOR

Disk Based Word Processor

- A COMPLETE WORD PROCESSING SYSTEM FOR YOUR TRS-80
- PROVIDES FULL EDITING CAPABILITY INCLUDING PARAGRAPH MOVE, LINE DELETION, INSERTION AND CORRECTION.
- STORE TEXT ON DISK, PRINT BUSINESS/PERSONAL LETTERS, REPORTS WITH NUMBERED PAGES AND TITLE PAGES.
- TEXT IS STORED ON DISK AS BLOCKS ARE CREATED SO TEXTS ARE NOT LIMITED BY THE AVAILABLE MEMORY.
- REQUIRES 16K AND ONE OR MORE DISK DRIVES.
- COMES COMPLETE ON CASSETTE WITH SOFTWARE TO PRODUCE UPPER/LOWER CASE AT PRINTHEAD, AND KEYBOARD REVERSE.
- FULL RIGHT/LEFT JUSTIFICATION AND MUCH MORE.

SEND CHEQUE, MONEY ORDER OR ORDER BY PHONE, 24 HOURS, 7 DAYS A WEEK. MASTERCHARGE AND VISA CARDS WELCOME.
- PLEASE INCLUDE $1.00 EXTRA FOR FIRST CLASS POST.

7.50

Available Now!

Mailing List Option

- A COMPLETE MAILING LIST OPTION FOR THE OWNERS OF THE PENSA-WRITE WORD PROCESSOR.
- CAPACITY FOR 300 NAMES PER DISK.
- SORTS BY ZIP CODE, PRINTS BUSINESS LETTERS (CREATED BY PENSA-WRITE) AGAINST MAILING LIST OR PORTION THEREOF DEPENDING ON SELECTABLE CRITERIA.
- PRINTS LABELS IN USER DEFINABLE FORMAT: ANY NUMBER OF COLUMNS (UP TO 5) ACROSS THE PAGE, ANY TAB POSITIONS, AND ANY NUMBER OF SPACES BETWEEN ROWS.
- INTERFACES DIRECTLY WITH PENSA-WRITE SOFTWARE TO FORM THE COMPLETE WORD PROCESSING/MAILING SYSTEM.
- REQUIRES 32K AND ONE DISK DRIVE.
- PLEASE NOTE: PENSA-MAIL IS NOT A "STAND ALONE" PROGRAM AND IS DESIGNED TO BE USED WITH PENSA-WRITE.

7.50

PENSADYNE

4441 West First Ave.
Vancouver, B.C.
V6R 4H9
604-224-3107

MasterCard VISA

Circle 312 on inquiry card.

Apple® II

SOFTWARE ACCESSORIES SUPPLIES

ULTRA-CURRENT 1000 ITEMS

BUYERS GUIDE



TO ORDER
send $3.00
You receive current BUYERS GUIDE and a certificate worth $3.00 off of your first purchase.

wcas 2513 N. Sheridan Rd.
Peoria, Illinois 61604

Circle 313 on inquiry card.

JINSAM™ Data Manager

- ★ CUSTOM DATA FILES
- ★ FAST/EASY/MENU DRIVEN
- ★ HELP COMMANDS
- ★ KEYED RANDOM ACCESS
- ★ MULTIPLE SEARCH KEYS
- ★ PRIVACY ACCESS CODES
- ★ WILD CARD SEARCH

For 16K-32K PET, Dual Disk, and Printer

FREE: LABEL PRINTER MODULE
FREE: REPORT GENERATOR MODULE
Specify CBM 2040 or COMPU/THINK

Package **$175** **User's Guide** only **$25**
Introductory Demo Tape $5 Disk $ 8

Check or Money Order plus $2 Shipping
(NY residents add 8% Sales Tax)
– DEALER INQUIRIES WELCOMED –

JINI MICRO-SYSTEMS, Inc.
P.O. Box 274-B • Bronx, NY 10463

Circle 314 on inquiry card.

QUARTZ CRYSTALS

.3218-B	5.2428-B	9.9336-B	20.000-B	36.2886-B	42.8518-B	46.8128-B
5390-B	5.610-B	9.98408-B	20.4988-B	36.3636-B	42.8768-B	47.3768-B
1.000-A	5.7143-B	9.98960-B	22.1184-B	37.9628-B	42.9258-B	47.8638-B
1.8432-A	5.955-B	10.000-B	22.6258-B	38.3768-B	42.9628-B	48.000-B
1.8437-B	5.982-B	10.2458-B	26.3556-B	38.4448-B	43.0008-B	48.3006-B
2.000-A	6.000-B	10.4968-B	26.5006-B	38.6258-B	43.0378-B	48.6668-B
2.0971-A	6.144-B	10.7755-B	26.6706-B	38.9258-B	43.0748-B	48.7006-B
2.4576-A	6.15030-B	10.8255-B	27.000-B	39.3128-B	43.1858-B	48.8768-B
2.500-A	6.29780-B	10.8386-B	27.0006-B	39.5038-B	43.2598-B	49.7006-B
2.6657-B	6.400-B	11.1360-B	27.6506-B	39.6668-B	43.3338-B	49.7338-B
2.9950-B	6.5536-B	11.155-B	28.4006-B	39.7538-B	43.3708-B	49.8128-B
3.000-A	6.77530-B	11.2186-B	28.8276-B	39.8768-B	43.4078-B	50.2505-B
3.067-B	6.75840-B	11.2890-B	28.7538-B	39.9628-B	43.4378-B	51.0556-B
3.200-B	6.9003-B	11.4776-B	29.8758-B	40.4448-B	43.4448-B	51.3128-B
3.2768-A	7.0063-B	11.6566-B	29.9378-B	40.5928-B	43.5558-B	51.7778-B
3.500-B	7.0336-B	11.6816-B	30.0648-B	40.8128-B	43.6298-B	51.8506-B
3.579-B	7.0916-B	12.440-B	30.3606-B	40.8336-B	43.6668-B	52.8128-B
4.000-B	7.1836-B	14.3182-B	30.6258-B	40.8758-B	43.7778-B	56.7506-B
4.1943-B	7.2586-B	14.4308-B	30.8768-B	40.8888-B	43.8128-B	60.6006-B
4.3426-B	8.000-B	15.000-B	31.4378-B	40.9258-B	43.8148-B	60.7508-B
4.4803-B	8.0556-B	15.4408-B	31.7538-B	41.0008-B	43.8518-B	66.7506-B
4.6103-B	8.1416-B	15.5066-B	31.9008-B	41.1866-B	43.8888-B	70.4006-B
4.6503-B	8.1818-B	16.000-B	32.000-B	41.3766-B	43.9258-B	75.0005-B
4.8303-B	8.3303-B	16.3848-B	33.2006-B	41.9378-B	44.0008-B	90.8338-B
4.9152-B	8.4998-B	17.2248-B	33.6258-B	42.0008-B	44.0378-B	99.9668-B
5.000-B	8.5766-B	17.2422-B	34.5558-B	42.5836-B	44.3768-B	100.6668-B
5.0688-B	8.6056-B	18.000-B	34.7538-B	42.6268-B	44.7778-B	101.4668-B
5.1203-B	8.9608-B	18.4320-B	34.9776-B	42.7006-B	45.1256-B	103.0668-B
5.1850-B	8.9906-B	19.4690-B	35.9256-B	42.7538-B	46.3006-B	103.4668-B
5.1856-B	9.47208-B	19.7508-B	36.000-B	42.8148-B	46.7006-B	104.9918-B

ALL 'A' — $2.99 ALL 'B' — $1.99 10 OR MORE-DEDUCT 5%


ADD $1.00 SHIPPING
CAL. RES. ADD 6% SALES TAX
FREE OSCILLATOR SCHEMATICS WITH ANY ORDER

QUALITY COMPUTER PARTS
P.O. BOX 743 / CHATSWORTH, CA 91311

Circle 315 on inquiry card.

MEMOREX Floppy Discs

Lowest prices. **WE WILL NOT BE UNDERSOLD!!** Buy any quantity 1-1000. Visa, Mastercharge accepted. Call free (800)235-4137 for prices and information. All orders sent postage paid.



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

Circle 316 on inquiry card.

MICROCOMPUTERS and PHYSIOLOGICAL SIMULATION

James E. Randall, *Indiana University School of Medicine, Bloomington*

Foreword by **Arthur C. Guyton,** *University of Mississippi School of Medicine, Jackson*

This book provides microcomputer hardware and programs suited for teaching simulations such as nerve action potential, cardiac action potential, cardiovascular system mechanics, and the glucose tolerance test.

"Sorely needed for those of us who are just beginning to adapt microprocessors to teaching applications in Physiology. Dr. Randall is eminently qualified to do this special job. He has interacted for several years with his potential readers through his activities in the American Physiological Society."

Beverly Bishop
SUNY at Buffalo, School of Medicine

Feb. 1980, 250 pp., illus. Paper 06128 $14.50

Price is subject to change without notice.

Addison-Wesley
Advanced Book Program
Reading, Mass. 01867, U.S.A.

Circle 317 on inquiry card.

Fine Software Tools in C



The Toolbox

xref – cross reference C programs. Handles #include and #line.
sort – alphabetize by all or part of text line.
list – print source listing with date heading and line numbers. Handles #include and #line.
col – rearrange into variable number of columns.
print – paginates text for hard copy.
crt – spool through your files, a screen at a time.
and more

All programs in Whitesmith C except date function of list and print in PDP-11* assembler. *Source* code on 8" floppies in RT-11*(RX01) format. Documentation included. Available immediately for $45 (includes shipping and sales tax) from:
*PDP-11 and RT-11 are trademarks of Digital Equipment Corporation.

The Toolsmith
P.O. Box 22511
San Francisco, CA 94122

Circle 318 on inquiry card.

INTERTEC SUPERBRAIN SOFTWARE
Available Now!

BUSINESS SOFTWARE
INVESTMENT LEDGER $400
Takes care of Stocks, Bonds, CD's, A/R, Real Estate, others -up to 250 investments

GENERAL LEDGER $350
All general bookkeeping functions, major & sub accounts, comparitive statements

EXPENSE LEDGER $150
Designed to co-ordinate with the General Ledger for applications with multiple cost centers

CHECK REGISTER/BANK RECONCILIATION $90
Relieve the worries of keeping up with cash disbursements - balances the checkbook

FINANCIAL PACKAGE $65
Amortization schedules, balloon notes, effective interest, present/future value, etc.

GAMES.....$5 *
* Wumpus * Escape * Bismark
* Adventure * Others

MISCELLANEOUS
REPORT GENERATORS .....$25 *
Rentals, Automobiles, Insurance Policies, etc.

ALL SOFTWARE EXCLUSIVELY DEVELOPED FOR THE SUPERBRAIN
all prices include manuals, additional manuals $25 ea.
* Prices do not include media cost

GSC
General Systems Consulting

(915) 676-9612 2310 S 7TH, Suite 118, Abilene Texas 79605


Circle 319 on inquiry card.

LOGIC PROBE

CYBERTECH

CMOS/TTL
HI 70%
LO 30%
PULSE
HI-Z or INVALID LEVEL

$19.95
ASSEMBLED AND TESTED.



POWERED BY CIRCUIT UNDER TEST.
SUPPLY LEADS AND INPUT ARE OVERVOLTAGE AND REVERSE POLARITY PROTECTED.

COMPARE TO UNITS COSTING 2 AND 3 TIMES AS MUCH! USE OUR 90 DAY GUARANTEE AS A TRIAL PERIOD. YOUR MONEY BACK IF NOT SATISFIED!

SEND $19.95 TO: ORDER DLP-1300.

CYBERTECH
P. O. BOX 504
ALLEN, TX 75002
(214) 727-3900


WE PAY POSTAGE. SORRY, NO C.O.D.s

Circle 320 on inquiry card.

EXCITING MAIL ORDER DISCOUNTS

apple® II 16K computer

Disk II with Controller $479....without $425

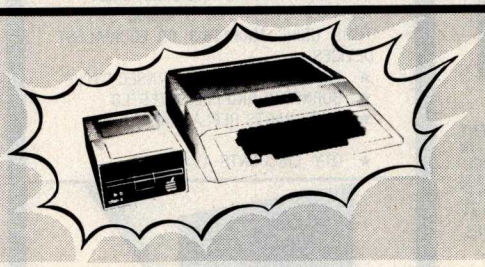

$899

APPLE II 32K $999
APPLE II 48K $1099

DOS 3.3 with upgrade kit $48

APPLE II ACCESSORIES

Apple Joystick	47
ABT Numeric Input Keyboard	114
ALF Music Synthesizer	245
Brightpen Lightpen from Softape	32
Clear Cover for Apple Computer	25
CCS Programmable Timer Module	159
Dan Paymer Lower Case Kit	49
D C Hayes Micromdem	335
Extender Board	27
Graphics Input Tablet	649
Introl X-10 Remote Control System	239
Introl X-10 Controller Only	164
M&R Sup-R-Term 80 Column Board	325
Microsoft Z-80 Soft Card	299
Novation Cat Modem	159
Romwriter	149
Speechlink 2000/64 Word Vocabulary	215
SuperTalker Speech Synthesizer	239
Sup-R-Mod RF TV Modulator	25
SVA 8" Disc Controller Card	329
Versa-Writer Digitizer Drawing System	209

WE SHIP FAST!

Adventure by Microsoft	27
Apple Bowl	14
Applebug Assembler/Dissassembler	69
Applebug Debugger	27
Applepost Graph & Plot System	59
Applepost Mailing List System	44
Applesoft Utility Programs by Hayden	27
Applewriter Word Processor	59
Bill Budges Space Game Album	39
Bill Budges Trilogy of Games	29
The Cashier Retail Managment System	189
CCA Data Management by Personal Software	84
The Contributed Volumes 1-5 w/manuals	29
Desktop Plan by Personal Software	79
Dow Jones Portfolio Evaluator	44
Forth II by Programma Software	45
Fortran for use with Language System	159
Pascal Language System	395
Sargon II Chess Game-cassette	27
Sargon II Chess Game-disk	35
Shell Games	27
Space Invader-Cassette	18
Space Invader-disk	25
Sub-Logic FS-1 Flight Simulator Cassette	23
Sub-Logic FS-1 Flight Simulator-disk	29
Sybex Apple 80 8080 Simulator	17
Visicalc by Personal Software	115

APPLE COMPUTER INTERFACE CARDS

Asynchronous Serial Interface #7710A	$145
Applesoft II Firmware Card	149
CCS Arithmetic Processor Card #7811B	329
CCS Parallel Interface Card #7720A	155
Centronics Printer Interface Card	179
Apple Clock/Calendar Card by Mountain Hardware	229
Communications Card & DB25 Cable	179
Integer Basic Firmware Card	149
Parallel Printer Interface Card	139
Prototyping Hobby Card	22
Romplus Card with keyboard filter	169
Romplus Card without keyboard filter	159
SSM AIO Serial/Parallel I/O Assembled & Tested	169
Serial Interface Card	139
Symtec Light Pen Card	214

PRINTERS, MONITORS, DISCS

Anadex DP8000	850
Anadex DP8000AP	850
Centronics without cable	819
Epson TX80-B W/Graphics	799
MPI 88T	650
NEC Spinwriter #5510	2695
Paper Tiger with Graphics	959
Silentype with Interface Card	495
Leedex Video 100-12" B&W	139
Sanyo 9" B&W	169
Color Monitor 11"	349
Dyson disks (pkg 10)	50
Memorex (pkg 10)	40
Verbatim (pkg 10)	30

apple computer III

IN STOCK, CALL FOR PRICES!



ATARI 800 PERSONAL COMPUTER SYSTEM

$799

- High resolution COLOR Graphics
- 10K Basic in ROM
- 8K user RAM expandable to 48K
- Built-in RF TV modulator
- High speed serial I/O port
- Includes ATARI 410 program recorder
- 57 key full stroke keyboard

Atari 820 Printer	$489
Atari 810 Disk Drive	569
Atari 410 Program Recorder	69
Atari 16K RAM Module	149
Atari 8K RAM Module	99
Atari Basic ROM	45
Assembler/Editor	45
Basketball	30
Video Easel	30
Super Breakout	30
Music Composer	45
Computer Chess	30
Star Raiders	39
3D Tic-Tac-Toe	30
Joystick	19

THE AMAZING SORCERER II

16K $969



The SORCERER is a Z80 CPU based micro-computer internally expandable to 48K. 4K ROM resident monitor. I/O connector for S-100 expansion. Parallel and serial interface. Dual cassette I/O. Graphic resolution of 240 x 512, 30 lines of 64 characters, 8 x 8 dot matrix. Full ASCII set (upper and lower case), plus standard graphic symbols. User may define up to 128 characters. Keyboard is 63-key data processing type, plus a 16 key numberic input pad.

S-100 EXPANSION UNIT	$399
WORD PROCESSOR PAC	179
DEVELOPMENT PAC	89

WE ALSO SELL "QUALITY SOFTWARE" FOR SORCERER AT 10% OFF LIST.

VISA®

TO ORDER: Phone orders invited using Visa, Mastercard, or bank wire transfers. Visa & MC credit card service charge of 2%. Mail orders may send charge card number (include expiration date), cashiers check, money order, or personal check (allow 10 business days for personal checks to clear). Please include phone number. Include 3% shipping, handling, and insurance ($5.00 minimum) in USA. Shipments within Calif. add 6% sales tax. Foreign orders include 1% handling-shipped freight collect. Foreign orders over $1000 allow 3 weeks extra and include $25 license fee. All equipment is in factory cartons with the manufacturers warranty. Equipment is subject to price change and availability.


master charge THE INTERBANK CARD

MAIL TO: 1251 BROADWAY EL CAJON CA., 92021 (714) 579-0330

AUTHORIZED APPLE SALES & SERVICE

COMPUTER SPECIALTIES DIVISION OF CMI

Circle 321 on inquiry card.



64K BYTE EXPANDABLE RAM

DYNAMIC RAM WITH ON BOARD TRANSPARENT REFRESH GUARANTEED TO OPERATE IN NORTHSTAR, CROMEMCO, VECTOR GRAPHICS, SOL, AND OTHER 8080 OR Z-80 BASED S100 SYSTEMS ★ 4MHZ Z-80 WITH NO WAIT STATES.

- ★ SELECTABLE AND DESELECTABLE IN 4K INCREMENTS ON 4K ADDRESS BOUNDARIES.
- ★ LOW POWER—8 WATTS MAXIMUM.
- ★ 200NSEC 4116 RAMS.
- ★ FULL DOCUMENTATION.
- ★ ASSEMBLED AND TESTED BOARDS ARE GUARANTEED FOR ONE YEAR AND PURCHASE PRICE IS FULLY REFUNDABLE IF BOARD IS RETURNED UNDAMAGED WITHIN 14 DAYS.

	ASSEMBLED / TESTED
64KRAM	**$595.00**
48K RAM	**$529.00**
32K RAM	**$459.00**
16K RAM	**$389.00**



S100 MAINFRAME AND CARD CAGE

- ★ W/ SOLID FRONT PANEL . . . **$239.00**
- ★ W/ CUTOUTS FOR 2 MINI—FLOPPIES . . . **$239.00**
- ★ 30 AMP POWER SUPPLY **$119.00**
- ★ 8 SLOT MOTHERBOARD **$149.00**
- ★ 19 SLOT MOTHERBOARD **$199.00**

16K MEMORY EXPANSION KIT

ONLY **$58**

FOR APPLE, TRS-80 KEYBOARD, **EXIDY**, AND ALL OTHER 16K DYNAMIC SYSTEMS USING **MK4116-3** OR EQUIVALENT DEVICES.

- ★ 200 NSEC ACCESS, 375 NSEC CYCLE
- ★ BURNED-IN AND FULLY TESTED
- ★ 1 YR. PARTS REPLACEMENT GUARANTEE
- ★ QTY. DISCOUNTS AVAILABLE



VISTA V-200 MINI-FLOPPY SYSTEM

- ★ S100 DOUBLE DENSITY CONTROLLER
- ★ 204 KBYTE CAPACITY FLOPPY DISK DRIVE WITH CASE & POWER SUPPLY
- ★ MODIFIED CPM OPERATING SYSTEM WITH EXTENDED BASIC

$695.00

BETA COMPUTER DEVICES


1230 W. COLLINS AVE.
ORANGE, CA 92668
(714) 633-7280

Calif. residents please add 6% sales tax. Mastercharge & Visa accepted. Please allow 14 days for checks to clear bank. Phone orders welcome. Shipping charges will be added to all shipments.

32K BYTE MEMORY
RELIABLE/COST EFFECTIVE EXPANDABLE RAM FOR 6502 AND 6800 SYSTEM—AIM 65-*KIM*SYM*PET*S44-BUS

- ★ PLUG COMPATIBLE WITH THE AIM-65/SYM EXPANSION CONNECTOR BY USING A RIGHT ANGLE CONNECTOR (SUPPLIED) MOUNTED ON THE BACK OF THE MEMORY BOARD.
- ★ MEMORY BOARD EDGE CONNECTOR PLUGS INTO THE 6800 S 44 BUS.
- ★ CONNECTS TO PET OR KIM USING AN ADAPTOR CABLE.
- ★ RELIABLE—DYNAMIC RAM WITH ON BOARD INVISIBLE REFRESH—LOOKS LIKE STATIC MEMORY BUT AT LOWER COST AND A FRACTION OF THE POWER REQUIRED FOR STATIC BOARDS.
- ★ USES +5V ONLY, SUPPLIED FROM HOST COMPUTER.
- ★ FULL DOCUMENTATION. ASSEMBLED AND TESTED BOARDS ARE GUARANTEED FOR ONE YEAR AND PURCHASE PRICE IS FULLY REFUNDABLE IF BOARD IS RETURNED UNDAMAGED WITHIN 14 DAYS.

ASSEMBLED & TESTED	WITH 32K RAM	$395.00
	WITH 16K RAM	$339.00
	WITHOUT RAM CHIPS	$279.00
HARD TO GET PARTS (NO RAM CHIPS)		
WITH BOARD AND MANUAL		$109.00
BARE BOARD & MANUAL		$49.00



PET INTERFACE KIT—CONNECTS THE 32K RAM BOARD TO A 4K OR 8K PET. CONTAINS: INTERFACE CABLE, BOARD STANDOFFS, POWER SUPPLY MODIFICATION KIT AND COMPLETE INSTRUCTIONS. **$49.00**

U.S. PRICES ONLY


NLS Portable Oscilloscopes

15 MHz Triggered Miniscope Model **MS-15**

15 MHz Dual Trace Triggered Miniscope Model **MS-215**

30 MHz Dual Trace Triggered Miniscope Model **MS-230**



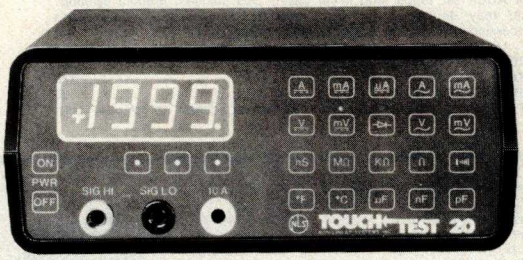

New Touch/Test 20 Multimeter

A portable/bench-type meter than tests and measures 10 electrical parameters, 20 functions & 45 ranges.

MEASURES:

■ AC and DC Voltage ■ AC and DC Current ■ Resistance ■ Temperature, °C & °F ■ Conductance ■ Capacitance ■ Performs diode/transistor and continuity tests

FEATURES

■ Touch selection and control of functions, ranges and power. ■ Large (0.55″ high) LED readout. ■ In-circuit test capabilities. ■ Size: 2.9″ H x 6.4″ W x 7.5″ D. ■ Weighs less than 3 lbs.

Order with Confidence and get the Fordham Advantage!

Call for our prices **TOLL FREE**
(800) 645-9518
in N.Y. State call (516) 752-0050

FORDHAM
855 Conklin St. Farmingdale, N.Y. 11735

VISA • master charge

- ■ Master Charge
- ■ BankAmericard
- ■ VISA ■ COD
- ■ Money Order
- ■ Check

COD's extra

Circle 322 on inquiry card.

The Supermarket for TRS-80* Add-on Components (and other computers, too)

In stock now. Immediate delivery.

The Vista V-80/800/8000 Family Disk Drive System


- Fully compatible with TRS-80, Heath/Zenith
- 120 Day Warranty
- 40 Track Patch at NO CHARGE



V-80 Single drive system (102K)	$ 395.00
V-80 Two drive system (204K)	$ 770.00
V-800 Single drive, B52 Drive (204K)	$ 595.00
V-800-2 Double drive, B52 Drives (408K)	$1175.00
V-8000 Single drive, B92 Drive (408K) ...	$ 775.00
V-8000-2 Double drive B92 Drives (816K)	$1450.00

The VISTA Model II

- Provides one, two or three drives.
- Adds up to 1.5 million bytes of on-line storage.
- 120 day warranty
- Does everything Radio Shack's expansion system will do. . . for less!

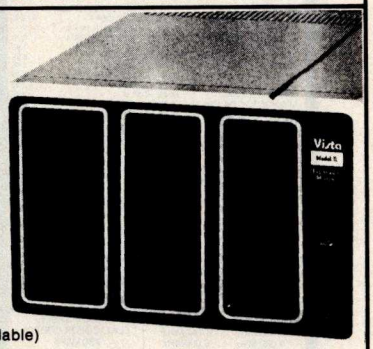

$ 900.00	Single drive (non-expandable)
$1000.00	Single drive Expansion System
$1550.00	Two drive Expansion System
$2100.00	Three drive Expansion System
$ 525.00	Additional drives alone

Vista's Add on Drives for Apple™

Speed . Capacity . Price


More for Less



- 30 to 60% cheaper per byte
- From 20 to 400% more capacity
- Twice as fast
- Compatible with Pascal
- Warranty 120 days

40-Track	$365.00
80-Track	$595.00
160-Track	$825.00
Controller	$100.00

The Vista MUSIC MACHINE 9

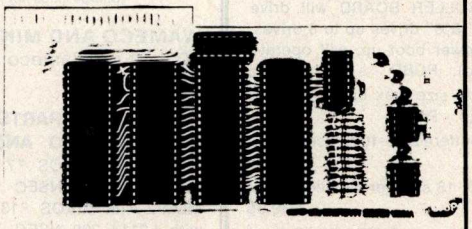

WITH 9 VOICES!

- NEW! Uses latest State of the Art LSI Technology.
- Requires only one slot for 9 voices!
- Uses three Ay3-8910's to produce nine voices (Other competitive models have only 3 voices).
- Simulates three ALF Boards.
- Plays music generated by the ALF Board.
- APPLE™ II compatible.
- ALF™ software required.

3 Times More Powerful Than ALF™!

$129.95

Printers

Vista V300		$1895.00
Daisy wheel Letter quality		
Base 2 Printer		$575.00 (includes: 2-K Buffer, graphics, high speed tractor feed)
Variable line spacing control 0 to 64 dots in half dot increments 100 cps — six densities Standard 96 character ASCII Up to 10 character fonts		
Anadex DP8000		$895.00
9 x 7 dot matrix 80 column (112 cps)		
Vista Printer		$745.00
5 x 7 dot matrix 80 column (125cps)		

Add On Drives

MPI B51	40 Track, Double Density-204K	$275.00
MPI B52	Dual Head, Double Density-408K	$375.00
Siemens	FDD100-5 40 Track Double Density 204K	$275.00
Siemens	FDD100-8 8" Single Sided Drive	$448.00
Shugart	801R Single Sided Drive	$448.00


Other Products

1. VISTA Verbatim diskettes (hard or soft sector) Certified 40 track ..... $ 38.95
2. 16K RPM upgrade kits, guaranteed for 120 days. **PRIME PRODUCT** ..... $ 59.95
3. NEW! DOS + ... $110.00
4. LNW expansion bare board ..... $ 66.95
5. H.C. Pennington book, **TRS-80 Disk and Other Mysteries** ..... $ 18.95
6. DDT Disco-Tech disk drive timer ..... $ 19.95

The VISTA V-200 for Exidy

- Completely packaged system, tested and ready to plug in, includes: power supply, two 40 track drives, case, controller, all cabling and total CPM documentation.
- Storage capacity from 400K to 1.2 meg.
- System software-VISTA CP/M Disk Operating System and BASIC-E Compiler recorded on 5-1/4" diskettes.

Price: Starting as low as **$1199.00**

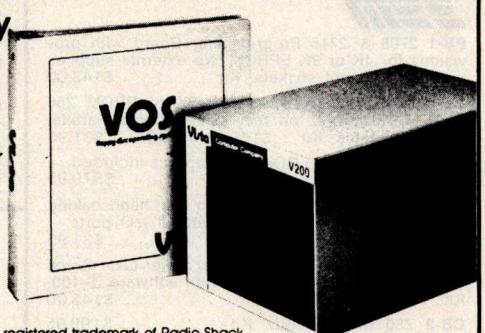

Vista

CALL TOLL-FREE 800-854-8017

*TRS-80 is a registered trademark of Radio Shack.

The Vista Computer Company 1401 Borchard Street • Santa Ana, California 92705 • 714/953-0523

Circle 323 on inquiry card.

Circle 324 on inquiry card.

C/MOS (DIODE CLAMPED)

4001	.35	4027	.45	4081	.35	74C74	.50
4002	.35	4028	.80	4082	.48	74C76	.70
4006	1.10	4029	.95	4093	.95	74C83	1.30
4007	.27	4030	.35	4501	.95	74C85	1.40
4009	.45	4034	2.25	4510	.90	74C93	1.30
4010	.45	4035	.97	4511	.95	74C95	1.40
4011	.35	4040	1.00	4514	1.95	74C96	.50
4012	.35	4042	.85	4515	1.95	74C93	.95
4013	.40	4043	1.00	4516	1.00	74C151	1.75
4014	1.20	4044	.90	4518	1.20	74C157	1.75
4015	1.00	4046	1.95	4520	1.00	74C160	1.20
4016	.45	4049	.75	74C00	.27	74C161	1.15
4017	1.05	4050	.45	74C02	.27	74C163	1.15
4018	.90	4051	1.10	74C04	.40	74C165	1.25
4019	.45	4052	1.10	74C08	.30	74C173	1.30
4020	1.10	4053	1.10	74C10	.27	74C174	1.20
4021	1.10	4066	.70	74C14	1.20	74C175	1.20
4022	1.00	4069	.45	74C20	.27	74C192	1.30
4023	.35	4071	.35	74C32	.45	74C901	.50
4024	.75	4072	.35	74C42	.90	74C926	6.95
4025	.35	4076	1.00	74C73	.75		

1488 RS232 INTERFACE	$1.40	AMD2901 BDC Hi SPEED	
1489 RS232 INTERFACE	1.25	BIT SLICER	$13.95
2509 TRI STATE STAT. SR	1.35	TMS4045-25 — 1K x 4	
2522 STATIC SHIFT REG.	1.95	250NS STATIC RAM	6.70
2708 EPROM (450 ns)	8.95	8Z523	2.95
TMS 3409 QUAD 8 BIT DYN.S.R.	1.35	8Z5112	8.95
2716 (TI) 3 VOLTAGES	16.95	8Z5123	4.95
2716 (Intel) + 5V	26.95	8Z5129	3.25
2114L 3.4K STAT. RAM (450 ns)	4.95	8Z5126	2.95
2532-4K x EEPROM	69.00	8Z5131	3.95
MMM5321 TV SYNC GEN.	9.75	8Z5130	3.45
21L02 3 (350 ns)	.99	AY5 1013 UART	3.75
MM5270 4K X1 DYN.	3.45	TRI 6028	4.25
MK4008P-7	1.95	MC6845	24.95
2101 1 254 × 4 STATIC	2.45	MCM 6571A 7 × 9 Char. gen	10.75
FD1791 FLOPPY DISC CONTROLLER	34.95	8080A	7.75
MK4027-3 4K × 1 DYN. (200 ns)	3.95	8205	3.95
MK4096 11K × 1 DYN. RAM	2.95	8216	2.90
4116-3 16K DYN. 300 NS	5.50	8223	4.95
5280-21079 4K DYN. RAM	3.40	8255-5	5.95
TMS 4050L	3.95	8251	6.95

8130	2.95	8T380	2.25	8837	2.25
8131	2.95	8830	2.95	8838	2.25
8833	2.50	8834	2.25		

DATEL'S DAC-08BC — 8 bit DAC — $9.95

8" DISKETTES — HARD SECTOR
$1.75, 10/$16.00

CRYSTALS $3.45 ea.	
2.000 MHz	6.144 MHz
4.000 MHz	8.000MHz
3.000 MHz	10.000 MHz
3.57 MHz	18.000 MHz
5.000 MHz	20.000 MHz
6.000 MHz	

RIBBON CABLE
FLAT (COLOR CODED)
#30 WIRE
16 cond. - .40/per foot
40 cond. - .75/per foot
50 cond. - .90/per foot

RS232 CONNECTORS
DB 25P male $3.25
DB 25S female ... $4.25
HOODS $1.50

200PRV 1A LASCR .95

LED READOUTS

FCS 8024 - 4 digit C.C. 8" display	$5.95	DL-707 C.A. .3"	$ .75
FND 503 C.C. .5"	$ .85	DL 747 C.A. .6"	$1.50
FND 510 C.A. .5"	$ .85	HP3400 .8" CA	$1.95
DL-704-.3" C.C.	$ .85	HP3405 .8" CC	$1.95

PRINTED CIRCUIT BOARD

4" x 6" DOUBLE SIDED EPOXY BOARD 1/16" thick
$.60 ea. ..... 5/$2.60

EPOXY glass vector board
1/16" thick with 1/10" spacing 4½" x 6½" $1.95

74S00	.30	74S20	.40	74S153	1.10
74S02	.30	74S30	.40	74S151	1.25
74S05	.45	74S32	.40	74S157	1.25
74S08	.40	74S89	1.90	74S158	1.25
74S11	.35	74S112	.85	74S174	1.40
74S15	.40	74S140	1.00	74S257	1.50

7 WATT LD-65 LASER DIODE IR $8.95

25 watt Infra Red Pulse (SG 2006 equiv.)
Laser Diode (Spec sheet included) $24.95

MINIATURE MULTI-TURN TRIM POTS
100, 5K, 10K, 20K, 250K, ... $.75 each ... 3/2.00

2N3820 P FET ..... $ .45
2N 5457 N FET ..... $ .45
2N2646 UJT ..... $ .45
ER 900 TRIGGER DIODES ..... 4/$1.00
2N 6028 PROG. UJT ..... $ .65

FP 100 PHOTO TRANS ..... $ .50
RED, YELLOW OR GEEN LARGE LED's. .2" ..... 6/$1.00
RED/GREEN BIPOLAR LED's ..... $ .55
MLED92 R LED ..... $ .75
MRD148 PHOTO DARL. XTOR ..... $ .75
TIL-118 OPTO-ISOLATOR ..... $ .75
IL-5 OPTO-ISOLATOR ..... $ .80
1 WATT ZENERS: 3.3, 4.7, 5.1, 5.6, 6.8, 8.2, 9.1, 10, 12, 15, 18, or 22V ..... 6/$1.00

100, 5K, 10K, 20K, 250K, $.75 each 3/2.00
SFC 3301 — 50PRV 30A FAST RECOVERY DIODE (35ns) $2.25

Silicon Power Rectifiers

PRV	1A	3A	12A	50A	125A	240A
100	.06	.14	.35	.90	3.70	5.00
200	.07	.20	.40	1.30	4.25	6.50
400	.09	.25	.65	1.50	6.50	9.60
600	.11	.30	.80	2.00	8.50	12.50
800	.15	.35	1.00	2.50	10.50	16.50
1000	.20	.45	1.25	3.00	12.50	20.00

IN 4148 (IN914) ..... 15/$1.00
.1 or .01 uf 25V ceramic disc. caps. 16/$1.00, 100/$50.00

REGULATORS

LM317T	$2.50	340K-12, 15 or 24V	$1.50
323K-5V 3A	$5.75	340T-5, 6, 8, 12, 15	
79HGKC-5V at 5A	6.95	18 or 24V	$1.10
723	$ .50	320M5	$ .75
320T-5, 12, or 15V	$1.10	LAS1412 + 12V 3A	$3.95
LM3056	$ .75		

TRANSISTOR SPECIALS

2N1303 PNP GE TO-5	3/$1.00
2N1307 PNP GE TO-5	$ .40
2N404A PNP GE TO-5	3/$1.00
HEP G6014 — PNP GE TO-3	$ .85
TIP 121 — NPN Si SWITCHING	$ .95
2N5233 NPN SWITCHING POWER	$1.95
MRF-8004 a CB RF TRANSISTOR NPN	$ .75
2N3772 NPN Si TO-3	$1.00
2N4908 PNP Si TO-3	$1.00
2N5086 PNP Si TO-92	4/$1.00
2N3137 NPN Si RF	$ .55
2N3919 NPN Si TO-3 RF	$1.50
2N1420 NPN Si TO-5	3/$1.00
2N3767 NPN Si TO-66	$ .70
2N2222 NPN Si TO-18	5/$1.00
2N3055 NPN Si TO-3	$ .60
2N3904 NPN Si TO-92	6/$1.00
2N3906 PNP Si TO-92	6/$1.00
2N5296 NPN Si TO-220	$ .55
2N6109 PNP S. TO-220	$ .55
2N1309 PNP GE TO-5	$ .40
TIP 31B NPN Si TO-220	$ .60
TIP 32B PNP Si TO-220	$ .65

TTL IC SERIES

7400	.17	7448	.75	74157	.65
74101	.17	7450	.17	74160	.85
7402	.17	7472	.35	74161	.80
7403	.17	7473	.35	74162	1.20
7404	.24	7474	.42	74163	.95
7405	.24	7475	.49	74164	.85
7406	.33	7476	.45	74165	.85
7407	.35	7480	.45	74166	1.05
7408	.27	7483	.60	74167	1.35
7409	.24	7485	.75	74170	1.60
7410	.17	7486	.42	74173	1.30
7411	.22	7489	1.60	74174	.85
7412	.22	7490	.50	74175	.75
7413	.42	7491	.55	74176	.75
7414	.90	7492	.50	74177	.75
7416	.33	7493	.50	74180	.75
7417	.37	7494	.60	74181	1.90
7420	.17	7495	.60	74190	1.20
7425	.35	7496	.60	74191	1.20
7426	.33	74107	.35	74192	.79
7427	.35	74121	.35	74193	.79
7430	.17	74122	.39	74194	.85
7432	.27	74123	.42	74195	.65
7437	.27	74125	.45	74196	.85
7438	.27	74126	.45	74197	.87
7440	.17	74145	.75	74279	.95
7441	.85	74150	1.10	74325	2.25
7442	.50	74151	.65	74365	.80
7445	.70	74153	.55	74367	.80
7446	.75	75154	1.10	74368	.65
7447	.75	74155	.75	75491	1.05
				75492	1.05
				8T98	1.10

TTL REED RELAY — SPST 5V 20ma $1.00

MM5387AA ..... CLOCK CHIPS	$5.95
MM5314	$4.75
MM5316	$4.95

NO. 30 WIRE WRAP WIRE SINGLE STRAND
100' $1.40

ALCO MINIATURE TOGGLE SWITCHES

MTA 106 SPDT	$1.05
MTA 206 DPDT	$1.70
MTA 206 P-DPDT CENTR OFF	$1.85
MSD 206 P-DPDT CENTER OFF LEVER SWITCH	$1.85

Full Wave Bridges

PRV	2A	6A	25A
100			1.40
200	.80	1.30	2.20
400	1.00	1.65	3.30
600	1.30	1.90	4.40

DIP SOCKETS

8 PIN	.17	22 PIN	.30
14 PIN	.20	24 PIN	.35
16 PIN	.22	28 PIN	.40
18 PIN	.25	40 PIN	.60

SANKEN AUDIO POWER AMPS

Si 1010 G 10 WATTS	$ 7.50
Si 1020 G 20 WATTS	$13.75
Si 1050 G 50 WATTS	$26.90

TANTULUM CAPACITORS

.22UF 35 V	5/$1.00	4.7UF 15V	5/$1.00
.47UF 35 V	5/$1.00	6.8UF 35V	4/$1.00
.68UF 35 V	5/$1.00	15UF 16V	3/$1.00
1UF 35V	5/$1.00	30UF 6V	5/$1.00
2.2UF 20V	5½ $1.00	33UF 20V	$ .60
3.3UF 20V	4/$1.00	100UF 15V	$ .70
		150UF 15V	$ .95

74LS SERIES

74LS00	.28	74LS153	1.19
74LS01	.29	74LS155	1.19
74LS02	.28	74LS156	1.19
74LS03	.28	74LS157	.85
74LS04	.35	74LS160	1.10
74LS05	.35	74LS161	1.10
74LS08	.35	74LS162	1.10
74LS09	.35	74LS163	1.20
74LS10	.30	74LS164	1.20
74LS11	.45	74LS168	1.25
74LS12	.35	74LS170	1.70
74LS13	.95	74LS173	1.30
74LS14	1.20	74LS174	1.00
74LS15	.35	74LS175	1.00
74LS20	.30	74LS181	2.50
74LS21	.55	74LS190	1.25
74LS22	.35	74LS191	1.15
74LS26	.35	74LS192	1.00
74LS27	.45	74LS193	1.10
74LS28	.45	74LS194	1.95
74LS30	.35	74LS195	1.10
74LS32	.40	74LS196	1.20
74LS37	.45	74LS197	1.10
74LS38	.55	74LS240	2.50
74LS40	.40	74LS241	2.95
74LS42	1.00	74LS242	3.00
74LS47	1.05	74LS243	2.75
74LS51	.35	74LS244	2.50
74LS54	.35	74LS251	1.29
74LS73	.60	74LS257	.90
74LS74	1.05	74LS258	1.50
74LS76	.45	74LS259	1.50
74LS85	1.10	74LS266	.70
74LS86	.45	74LS273	1.85
74LS90	.90	74LS279	.70
74LS92	.90	74LS290	.80
74LS93	.90	74LS293	.80
74LS112	.45	74LS365	.80
74LS113	.45	74LS366	.80
74LS114	.55	74LS367	.80
74LS125	.90	74LS368	.80
74LS126	.90	74LS375	.95
74LS132	.95	74LS377	2.75
74LS136	.80	74LS386	.50
74LS138	1.25		
74LS139	1.30		
74LS151	1.19		

LINEAR CIRCUITS

LM201	.75		
LM270	1.50		
LM301/748	.25		
LM307	.30		
LM308	.75		
LM311	.75		
LM318	1.20		
LM324	.95		
LM339	1.10		
LM348	.90		
LM358	.70		
LM361	1.75		
LM377	1.60		
LM380	.95		
LM382	1.25		
LM386	.80		
LM387	1.25		
LM1808	1.75		
1810PC	2.20		
LM1889	1.95		
CA3018	1.95		
CA3080	.95		
CA3086	.95		
LM370	1.50		
LM527	2.50		
LM553	2.50		
LM565	.49		
LM566	.95		
560	2.00		
565	.95		
566	1.25		
567	1.10		
702	.95		
703	.85		
709	.25		
710	.45		
711CH	.40		
741CV	.30		
747	.50		
LM1310	1.95		
1458	.50		
3900	.55		
8038CC	3.90		
4136	.95		
LF355	1.25		
NE540L	2.50		

SCR'S

	1.5A	6A	35A	110A
100	.45	.60	1.40	
200	.70	.80	1.90	9.00
400	1.20	1.40	2.60	12.00
600		1.80	3.60	15.00

TRIACS

PRV	1A	10A	25A
100	.45	.80	1.55
200	.84	1.30	2.10
400	1.30	1.90	3.10
600	2.00	2.75	4.30

Terms: FOB Cambridge, Mass
Send Check or Money Order
Include Postage, Minimum
Telephone, C.O.D. Purchase
Order or Charge $20.00.
Minimum Mail Order $5.00.

Send 25¢ for our catalog featuring
Transistors and Rectifiers
145 Hampshire St., Cambridge, Mass.

SOLID STATE SALES
P.O. BOX 74B
SOMERVILLE, MASS. 02143 TEL. (617) 547-7053

WE SHIP OVER 95%
OF OUR ORDERS THE
DAY WE RECEIVE THEM

CALIFORNIA COMPUTER SYSTEMS

16K RAM BOARD. Fully buffered addressable in 4K blocks. IEEE standard for bank-addressing 2114's. PCBD ..... $28.95 Kit 450 NSEC $249.95

PT-1 PROTO BOARD. Over 2,600 holes 4" regulators. All S-100 buss functions labeled, gold fingers. PCBD $28.95

PT-2 PROTO BOARD. Similar to PT-1 except set-up to handle solder tail sockets. PCBD $28.95

CCS MAIN FRAME. Kit (S-100) $339.95

APPLE EXTENDER. Kit $22.95

APPLE IEEE INSTRUMENTATION INTERFACE KIT 7490. Kit $275.00

ARITHMETIC PROCESSOR FOR APPLE 7811A. Kit $350.00

APPLE ASYNCHRONOUS SERIAL INTERFACE 7710A. Kit $89.95

APPLE SYNCHRONOUS SERIAL INTERFACE 7712A. Kit $89.95

ALL OTHER CCS PRODUCTS AVAILABLE

SSM

PB-1 2708 & 2716 Programming Board with provisions for 4K or 8K EPROM. No external supplies required. Textool sockets. Kit $143.00

CB-1A 8080 Processor Board. 2K of PROM 256 BYTE RAM power on/rest Vector Jump Parallel port with status. Kit ..... $146.00 PCBD $31.95

VB-3 80x24 VIDEO BOARD. Graphics included. 4MHZ $379.95

IO-4 Two serial I/O ports with full handshaking 20/60 ma current loop: Two parallel I/O ports. Kit ..... $168.00 PCBD $31.95

VB-IC 64 x 16 video board, upper lower case Greek composite and parallel video with software, S-100. Kit $143.00

CB-2 Z80 CPU BOARD. Kit $199.95

AIO APPLE SERIAL/PARALLEL $144.95

ALL OTHER SSM PRODUCTS AVAILABLE

WAMECO INC.

FDC-1 FLOPPY CONTROLLER BOARD will drive shugart, pertek, remic 5" & 8" drives up to 8 drives, on board PROM with power boot up, will operate with CPM™ (not included). PCBD $43.95

FPB-1 Front Panel. IMSAI size, hex displays. Byte, or instruction single step. PCBD $48.50

MEM-1A 8K x 8 fully buffered, S-100, uses 2102 type rams. PCBD $28.95

QM-12 MOTHER BOARD, 13 slot, terminated, S-100 board only $39.95

CPU-1 8080A Processor board S-100 with 8 level vector interrupt. PCBD $28.95

RTC-1 Realtime clock board. Two independent interrupts. Software programmable. PCBD $25.95

EPM-1 1702A 4K Eprom card. PCBD $25.95

EPM-2 2708/2716 16K/32K EPROM CARD. PCBD $28.95

QM-9 MOTHER BOARD. Short Version of QM-12. 9 Slots. PCBD $33.95

MEM-2 16K x 8 Fully Buffered 2114 Board. PCBD $28.95

PTB-1 POWER SUPPLY AND TERMINATOR BOARD. PCBD $28.95

IOB-1 SERIAL AND PARALLEL INTERFACE. 2 parallel, one serial and cassette. PCBD $28.95

2708 ..... $7.50 2114L 450 NSEC $4.99
2716 ..... $25.95 2114L 200 NSEC $5.99

MIKOS

(415) 726-7593
P. O. Box 955 • El Granada, CA 94018
Please send for IC, Xistor and Computer parts list

NOV. SPECIAL SALE ON PREPAID ORDERS

(Charge cards not included on this offer)

WAMECO AND MIKOS PARTS SALE.
10% off on Wameco PCBD with Mikos parts assortments.

MIKOS PARTS ASSORTMENT WITH WAMECO AND CYBERCOM PCBDS

MEM-2 with MIKOS #7 16K ram with L2114 450 NSEC $229.95
MEM-2 with MIKOS #13 16K ram with L2114 200 NSEC $249.95
CPU-1 with MIKOS #2 8080A CPU $99.95
QM-12 with MIKOS #4 13 slot mother board $110.95
RTC-1 with MIKOS #5 real time clock $65.95
EMP-1 with MIKOS #10 4K 1702 less EPROMS ..... $ 49.95
EPM-2 with MIKOS #11 16-32K EPROMS less EPROMS $65.95
QM-9 with MIKOS #12 9 slot mother board $99.95
FPB-1 with MIKOS #14 all parts for front panel $144.95

MIKOS PARTS ASSORTMENTS ARE ALL FACTORY MARKED PARTS. KITS INCLUDE ALL PARTS LISTED AS REQUIRED FOR THE COMPLETE KIT LESS PARTS LISTED. ALL SOCKETS INCLUDED.

LARGE SELECTION OF LS TTL AVAILABLE
PURCHASE $50.00 WORTH OF LS TTL AND GET 10% CREDIT TOWARD ADDITIONAL PURCHASES.
PREPAID ORDERS ONLY.

VISA or MASTERCHARGE. Send account number, interbank number, expiration date and sign your order. Approx. postage will be added. Check or money order will be sent post paid in U.S. If you are not a regular customer, please use charge, cashier's check or postal money order. Otherwise there will be a two-week delay for checks to clear. Calif. residents add 6% tax. Money back 30-day guarantee. We cannot accept returned IC's that have been soldered to. Prices subject to change without notice. **$10 minimum order. $1.50 service charge on orders less than $10.00.**

Circle 325 on inquiry card.

"COMPUTERS 'R' US"

A CONSUMER COMPUTERS SUBSIDIARY

UNBEATABLE MAIL ORDER DISCOUNTS

apple computer
Authorized Dealer

NEW! CALL FOR AVAILABILITY AND PRICES.



$925 FOR 16K

48K FOR ONLY $1049

apple ///

APPLE II OR APPLE II PLUS

APPLE COMPUTER PERIPHERALS

DISK II DRIVE & CONTROLLER card	485
DISK II DRIVE ONLY	425
GRAPHICS TABLET	655
SILENTYPE PRINTER w/int. card	515
SSM AIO SERIAL/PARALLEL kit	155
SSM AIO assembled & tested	190
SYMTEC LIGHT PEN SYSTEM	215
SYMTEC SUPER SOUND GENERATOR	225
SVA 8 INCH DISK CONTROLLER CARD	335
VERSA WRITER DIGITIZER SYSTEM	215
VIDEX VIDEOTERM 80 COLUMN CARD	315
VIDEX VIDEOTERM w/graphics ROM	335
LOBO DISK DRIVE ONLY	385
LOBO DRIVE w/controller card	465
DC HAYES MICROMODEM II	319
DAN PAYMAR lower case kit	55

APPLE COMPUTER INTERFACE CARDS

PARALLEL PRINTER Int. card	145
COMMUNICATION CARD w/conn. cable	185
HI-SPEED SERIAL Int. card	145
LANGUAGE SYSTEM with PASCAL	425
CENTRONICS PRINTER Int. card	185
APPLESOFT II FIRMWARE card	149
INTEGER BASIC FIRMWARE card	149

MOUNTAIN HARDWARE ACCESSORIES
A Division Of
Mountain Computer

APPLE CLOCK/CALENDAR card	225
SUPERTALKER SD200 SPEECH SYNTHISIZER SYSTEM	245
ROMPLUS w/keyboard filter	165
INTROL/X-10 BSR REMOTE CONTROL SYSTEM	245
INTROL/X-10 controller card only	165
ROMWRITER SYSTEM	155
MUSIC SYSTEM(16 voices/stereo)	465
A/D-D/A 16 CHANNELS	319
EXPANSION CHASSIS (8 slots)	555

APPLE ADD-ONS

CORVUS 10 MEGABYTE HARD DISK DRIVE SYSTEMw/pwr supply	4395
CORVUS CONSTELLATION	595
16K MEMORY UPGRADE KIT (TRS-80, APPLE II, SORCERER)	60
ABT NUMERIC INPUT KEYPAD (specify old or new kybrd)	115
ALF MUSIC SYNTHISIZER	235
BRIGHTPEN LIGHTPEN	32
GPIB IEEE-488 (1978) Int	259
ARITHMETIC PROCESSOR card	335
SPEECHLINK 2000 (64 Word Vocab.)	215
M&R SUP-R—MOD TV MODULATOR	30
MICROSOFT Z-80 SOFTCARD SYSTEM w/CP/M & MICROSOFT BASIC	299
MICROWORKS-DS-65 DIGISECTOR	339
LAZER lower case adapter	50

APPLE II or APPLE II PLUS SOFTWARE

PASCAL with LANGUAGE SYSTEM	425
FORTRAN for use with LANGUAGE SYSTEM	165
CP/M for use with MICROSOFT Z-80 SOFTCARD (Incl.)	299
DOS 3.3	49
THE CONTROLLER General Business System	519
THE CASHIER Retail Management & Inventory System	199
APPLEWRITER Word Processor	65
APPLEPOST MAILING list system	45
APPLEPLOT Graph & Plot Sytem	60
DOW JONES PORTFOLIO EVALUATOR	45
APPLE CONTRIBUTED VOLUMES 1 thru 5 w/manuals	30
VISI-CALC by PERSONAL SOFTWARE	120
DESKTOP/PLAN by DESKTOP COMPUTERS	85
CCA DATA MANAGEMENT SYSTEM By PERSONAL SOFTWARE	85
APPLEBUG ASSEMBLER/DISASSEMBLER	75
APPLE DOS TOOL KIT	65


PMC-80

COMPLETELY COMPATIBLE WITH RADIO SHACK TRS-80 LEVEL II SOFTWARE AND PERIPHERALS.


Features Include:

Level II BASIC
Video & Ch. 3 TV OUT.
Built in Cassette
40 pin interface conn.
16K User RAM Memory
Expandable to 48K

For more information, please call or write.



THE TRS-80 'WORK-ALIKE'
16K LEVEL II ONLY $579




16K FOR $799

ATARI 800
PERSONAL COMPUTER SYSTEM

ATARI ACCESSORIES

400 COMPUTER	479
820 PRINTER (40 col)	459
810 DISK DRIVE	559
410 Program Recorder	59
815 DUAL DISK DRIVE	1199
822 THERMAL PRINTER (40 col)	369
825 PRINTER (80 col. imp.)	795
850 INTERFACE MODULE	175
ATARI 16K RAM MODULE	155




16K $969
32K $1049
48K $1099

Exidy
SORCERER COMPUTER

S-100 EXPANSION UNIT	375
WORD PROCESSING PAC	179
DEVELOPMENT PAC	89

VIDEO MONITORS

LEEDEX VIDEO 100	129
SANYO 9" B&W	165
SANYO 15" B&W	245
PANACOLOR 10" COLOR	329
ZENITH 13" COLOR	399



$129
LEEDEX VIDEO 100



OHIO SCIENTIFIC Challenger

OHIO SCIENTIFIC

C1P MOD 2	429
C4P	599
C4PMF (1 disk drive)	1589
AC-16P JOYSTICKS (2)	39
ATV RF TV MODULATOR	35



$699
C4P
8K ROM BASIC
8K RAM EXPANDABLE TO 96K
32x64 UPPER & LOWER CASE
256x512 GRAPHICS POINTS
PROGRAMMABLE TONES
ANALOG INPUTS



$429
CIP MOD II
8K ROM BASIC
8K RAM EXPANDABLE TO 32K
COLOR EXPANSION
48 LINE DISPLAY EXPANSION

PRINTERS

ANADEX DP-8000	775
ANADEX DP-9500	1350
BASE 2	599
CENTRONICS 737	825
MPI 88-T	699
PAPER TIGER IDS-440 w/graphics	895
NEC SPINWRITER	2550
TRENDCOM 200	519
SILENTYPE w/Int	515
EPSON TX-80 w/graphics	729
EPSON MX-80 132 col	620



EPSON TX-80

- FAST DELIVERY
- LOW PRICES
- COURTEOUS SERVICE
- KNOWLEDGEABLE STAFF
- LARGE VARIETY

IN CALIFORNIA, OR FOR BACKORDER OR TECHNICAL INFO CALL: (714) 698-8088

TOLL FREE ORDER LINE: 1-800-854-6654

CREDIT CARD USERS PLEASE READ TERMS OF SALE IN ORDERING INFORMATION

ORDERING INFORMATION: Phone Orders invited using VISA, MASTERCARD, AMERICAN EXPRESS, or bank wire transfers. VISA & MC credit card service charge of 2%, AE credit card service charge of 5%. Mail orders may send charge card number (include expiration date), cashier's check, money order or personal check (allow 10 business days to clear.) Please include a telephone number with all orders. Foreign orders (excluding Military PO's) add 10% for shipping and all funds must be in US dollars. Shipping, handling and insurance in U.S. add 3%. California residents add 6% sales tax. Our low margins prohibit us to send COD or on account. All equipment subject to price change and availability. Equipment is new and complete with manufacturer warranty. We ship most orders within 2 days. Order desk hours are Monday thru Saturday 9-5 PST. Send for FREE 1981 Catalog.

WE ARE A MEMBER OF THE BETTER BUSINESS BUREAU AND THE CHAMBER OF COMMERCE


RETAIL STORE PRICES MAY DIFFER FROM MAIL ORDER PRICES.

PLEASE SEND ORDERS TO: CONSUMER COMPUTERS MAIL ORDER CRU Division 8314 PARKWAY DRIVE, GROSSMONT SHOPPING CENTER NORTH, LA MESA, CALIFORNIA, 92041

Circle 326 on inquiry card.

Circle 327 on inquiry card.

At last...the Typewriter Interface!

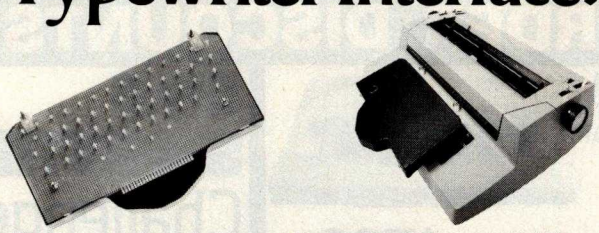

Turn your electric typewriter into a low cost, high quality hard copy printer. 1 Year Warranty

Dynatyper—the patented* RDI—I/O Pak is fast becoming the industry standard for typewriter output. Why? Because:

1. It takes 2 minutes to initially install and 5 seconds to remove or replace.
2. You *do not* have to modify your typewriter. All factory warranties and maintenance agreements on your typewriter will be honored.
3. You can use it with *all* powered carriage return typewriters that have U.S. keyboard. Our Model I works with all *non* Selectrics and our Model II works with Selectrics. Conversion between models takes 2 minutes and the kit (26 plungers) is available for a nominal charge.
4. You don't have to lug around a bulky printer when you travel. If there is a typewriter at your destination, you can install the light (3 lbs.) I/O Pak in just 2 minutes.
5. Same interface for TRS-80, Apple and GPIB. Centronics and Pet compatible interfaces are available in third quarter 1980. Electric pencil available.
6. Delivery: Stock to two weeks. Price: $499. for the complete system, FOB Rochester, Domestic.

Over 1000 in operation today. VISA and MasterCard accepted. Call Ken Yanicky at 716-385-4336.


*Patent Pending

ROCHESTER DATA

3100 Monroe Avenue, Rochester, New York 14618 incorporated

The TRS-80 I/O solution

The COMM-80 is the only interface you need to turn your TRS-80 Level I or II into a timesharing terminal with provisions for a printer. The COMM-80 combines the most used features of the RS expansion interface in a low cost unit containing a built-in RS-232-C interface (50 - 19,200 baud software selectable), a full 8 bit parallel port (34 pin edge card Centronics compatible) and a TRS-BUS connector for future expansion. Up to 16 units can be chained together and addressed separately. Interface your TRS-80 to all standard RS-232-C devices including modems, CRT Terminals, printers and other computers. Smart terminal software (will run in 4K) is included at no extra cost.



COMM-80™

Assembled and tested . . . $179.95

Includes case, power supply, ribbon cable, parallel printer port, serial port and TRS-BUS connector plus smart terminal software (please specify Level I or II).

NY residents add 7% sales tax.

TRS-80 is trademark of Tandy Corp.

To order call (516) 374-6793 or write:
The MicroMint Inc.
917 Midway
Woodmere, NY 11598

Dealer inquiries invited.

MICRO MINT

EXECUPORTS®


Quiet, Portable, Reliable, Versatile Printing Data Terminals

80 Print Position



Model 300

80/136 Print Position Plotting

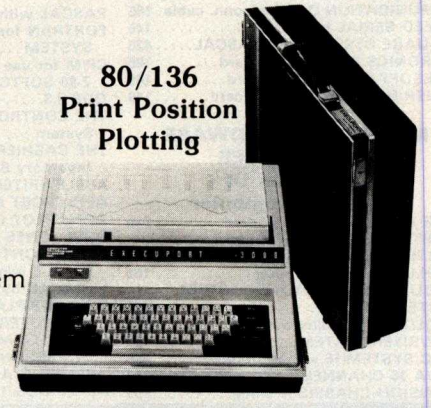

Model 3000

FEATURES:
- Built-In Acoustical Coupler/Modem
- 10, 15, 30 CPS
- Carrying Case

SPECIAL PURCHASE PRICES
Remanufactured Units

Model 300 $795
(90 Day Factory Warranty)

Model 3000 $1,195
(One Year Factory Warranty)

CALL NOW TO ORDER

Buy Direct From The Manufacturer • Maintenance Contract Available • Immediate Delivery •

CTSI **Computer Transceiver Systems Inc.**
East 66 Midland Avenue • Paramus, NJ 07652
P.O. Box 15 • Phone: (201) 261-6800

Circle 328 on inquiry card.

page

PRE-CUT WIRE WRAP WIRE

Length	100/Bag	500/Bag	1K/Bag
2.5"	$1.25	$3.58	$ 6.19
3.0"	1.30	3.86	6.78
3.5"	1.37	4.15	7.37
4.0"	1.42	4.44	7.94
4.5"	1.48	4.74	8.54
5.0"	1.54	5.04	9.13
5.5"	1.58	5.38	9.72
6.0"	1.65	5.66	10.31

Length	100/Bag	500/Bag	1K/Bag
6.5"	$1.92	$6.44	$11.81
7.0"	1.99	6.76	12.44
7.5"	2.08	7.07	13.09
8.0"	2.14	7.38	13.73
8.5"	2.18	7.69	14.36
9.0"	2.24	8.11	15.01
9.5"	2.30	8.32	15.65
10.0"	2.39	8.71	16.28

Kynar precut wire. All lengths are overall, including 1" strip on each end. Colors and lengths cannot be mixed for quantity pricing. Choose from colors Red, Blue, Black, Yellow, White, Green, Orange, and Violet.

Kit No. 1 — $9.95

250	3"	100	4½"
250	3½"	100	5"
100	4"	100	6"

Kit No. 2 — $24.95

250	2½"	250	5"
500	3"	100	5½"
500	3½"	250	6"
500	4"	100	6½"
250	4½"	100	7"

Kit No. 3 — $32.95

500	2½"	500	4½"
500	3"	500	5"
500	3½"	500	5½"
500	4"	500	6"


Kit No. 4 — $59.95

1000	2½"	1000	4½"
1000	3"	1000	5"
1000	3½"	1000	5"
1000	4"	1000	6"

★ ★ Truckload SALE ★ ★

FREE WIRE KIT

Kit #1 on orders over $50
Kit #3 on orders over $150
Kit #4 on orders over $250



RN WIRE WRAP IC SOCKETS

3-level Gold
Closed Entry
Design

*Sockets sold at these prices by the tube only.

Size	Quantity/Tube	Price ea.*	Price/Tube
08 pin	52	.39	**$20.28**
14	30	.46	**$13.80**
16	26	.50	**$13.00**
18	23	.68	**$15.64**
20	21	.85	**$17.85**
22	19	.92	**$17.48**
24	17	.94	**$15.98**
28	15	1.23	**$18.45**
40	10	1.60	**$16.00**

Above prices include gold up to $800/oz.

IDC CRIMP STYLE CONNECTORS

Card Edge Connectors	
IDE 10	$3.25
IDE 20	$3.50
IDE 26	$4.05
IDE 34	$4.85
IDE 40	$5.65
IDE 50	$5.90

IDC Sockets	
IDS 10	$1.25
IDS 20	2.02
IDS 26	2.65
IDS 34	3.50
IDS 40	4.05
IDS 50	5.06

Cable Plugs	
IDP 14	1.25
IDP 16	1.40
IDP 24	2.25
IDP 40	3.65

DB25 Connectors

Male	$4.95
Female	$5.25

Right Angle Headers

Wire Wrap		Solder Tail	
IDH10WR	1.75	IDH10SR	.80
IDH20WR	2.75	IDH20SR	1.25
IDH26WR	3.60	IDH26SR	1.85
IDH34WR	4.15	IDS34SR	2.15
IDH40WR	4.90	IDH40SR	2.50
IDH50WR	6.15	IDH50SR	3.15

CABLE

	10 ft.	100 ft.
10	2.90	17.00
14	3.40	23.80
16	3.70	27.20
20	4.40	34.00
24	5.00	40.80
26	5.40	44.20
34	6.80	57.80
40	7.80	68.00
50	9.50	85.00

ORDERING INFORMATION

- Orders under $25 include $2 handling.
- All prepaid orders shipped UPS Ppd.
- Visa, MC & COD's charged shipping.
- All prices good through cover date.
- Most orders shipped next day.
- Byte must be mentioned to get sale prices.

Call or Write for 1980 Catalog:

★ IC Sockets
★ Vector Boards & Pins
★ Bishop Drafting Aids
★ OK Tools
★ RN IDC Crimp Connectors

page 1858 Evergreen, Duarte, California 91010 Phone (213) 357-5005

Circle 329 on inquiry card.

Circle 330 on inquiry card.

WAMECO

THE COMPLETE PC BOARD HOUSE
EVERYTHING FOR THE S-100 BUSS

* **FPB-1A** FRONT PANEL BOARD FOR 8080A AND Z80 SYSTEMS IMSAI COMPATIBLE.
  PCBD ..... $56.95 KIT $175.00

* **MEM-2** 16K RAM 2114's. ADDRESSABLE IN 4K BOUNDARIES.
  PCBD .... $33.95 KIT (LESS RAMS) $80.95

* **EPM-2** 16/32K ROM USES 2716 OR 2708. ADDRESSABLE IN 4K BOUNDARIES.
  PCBD .... $33.95 KIT (LESS ROMS) $74.95

* **CPU-1** 8080A PROCESSOR BOARD WITH VECTOR INTERRUPT.
  PCBD ..... $33.95 KIT $124.95

* **IOB-1** I/O BOARD. ONE SERIAL, TWO PARALLEL WITH CASSETTE. PCBD $33.95

* **FDC-1A** FLOPPY DISC CONTROLLER BOARD USES 1771. PCBD $45.95

* **QMB-12** 13 SLOT MOTHER BOARD.
  PCBD ..... $42.95 KIT $125.95

* **QMB-9** 9 SLOT MOTHER BOARD.
  PCBD ..... $35.95 KIT $109.95

* **PTB-1** POWER SUPPLY AND TERMINATOR BOARD.
  PCBD ..... $29.95 KIT $49.95

* **RTC-1** REAL TIME CLOCK BOARD WITH TWO INTERRUPTS.
  PCBD ..... $29.95 KIT $79.95

* **MEM-1A** 8K RAM, USES 2102's.
  PCBD .... $33.95 KIT (LESS RAM) $71.95

* **EPM-1** 4K 170Z BOARD.
  PCBD .... $29.95 KIT (LESS ROM) $59.95

FUTURE PRODUCTS: 80 CHARACTER VIDEO BOARD.
Z-80 CPU BOARD WITH ROM, 8 PARALLEL PORT I/O BOARD.

DEALER INQUIRIES INVITED, UNIVERSITY DISCOUNTS AVAILABLE AT YOUR LOCAL DEALER

MOST PRODUCTS FOR IMMEDIATE SHIPMENT. NO 4-8 WEEK DELAYS REQUIRED FOR OTHERS.

wmc inc.

WAMECO, INC., P. O. BOX 877 • 455 PLAZA ALHAMBRA • EL GRANADA, CA 94018 • (415) 726-6378

BECKIAN ENTERPRISES

ALL PRIME QUALITY — NEW PARTS ONLY
SATISFACTION GUARANTEED.

EDGE CARD CONNECTORS: GOLD PLATED:

Abbreviations: S/E Solder Eye . S/T Sold Tail: W/W Wire Wrap.

PART #	DESCRIPTION.	Row Sp.	1-9pc.	10-24pcs.	25pcs. Up.
BRAND: TEXAS INST.					
4070	50/100 Imsai/Crom.	.250	$3.95ea.	$3.55ea.	$3.15ea.
4090	50/100 Imsai W/W	.250	4.30ea.	3.85ea.	3.45ea.
BRAND: SULLINS: U.L Reg.					
129865	50/100 Solder Eye	.140	6.80ea.	6.10ea.	5.45ea.
129870	50/100 S/T Imsai	.250	4.50ea.	4.10ea.	3.70
129875	50/100 W/W Imsai	.250	5.25	4.75	4.20
129885	50/100 S/T Altair	.140	4.95	4.45	3.95
129990	50/100 S/T Cromem.	.250	4.75	4.25	3.80
OTHER .125" CONTACT CTR CONNECTORS:					
12305	22/44 S/E No Ears	.140	4.15	3.75	3.35
12759	36/72 S/T	.140	5.40	4.85	4.35
12790	40/80 W/W	.250	6.30	5.65	5.00
.100" CONTACT CTR CONNECTORS:					
10048	13/26 S/E No Ears	.140	3.40	3.05	2.15
10280	25/50 S/E TRS 80	.140	4.50	4.05	3.60
10175	20/40 S/E TRS 80	.140	5.85	5.35	4.75
10180	20/40 W/W TRS 80	.200	3.30	3.00	2.15
10190	20/40 S/T TRS 80	.140	3.20	2.90	2.55
10485	36/72 S/E Vector	.140	5.50	4.90	4.40
10490	36/72 W/E Vector	.200	5.80	5.25	4.65
10500	36/72 S/T Vector	.140	5.70	4.20	4.60
10535	40/80 S/E PET	.140	5.85	5.35	4.75
10540	40/80 W/W PET	.200	6.00	5.40	4.80
10550	40/80 S/T PET	.140	5.80	5.25	4.65
10585	43/86 S/E COS/ELF	.140	6.95	6.25	5.55
10605	43/86 S/T COS/ELF	.140	6.60	5.95	5.30
10595	43/86 W/W COS/ELF	.200	6.90	6.20	5.95
10615	43/86 S/T COS/ELF	.200	6.80	6.10	5.40

.156" CONTACT CENTER CONNECTORS.					
PART #	DESCRIPTION.	Row Sp.	1-9pc.	10-24pcs.	25pcs. Up.
15105	6/12 S/E PET/NSC	.140	$1.80	$1.65	$1.45
15110	6/12 S/T PET/NSC	.140	1.85	1.65	1.50
15137	6/12 S/T PET/NSC	.200	1.80	1.54	1.45
15175	6/- S/E Sgle Row	- -	1.70	1.50	1.30
15270	10/20 S/E	.140	2.15	1.95	1.70
15275	10/20 S/T	.140	2.00	1.85	1.60
15435	12/24 S/E PET	.140	2.60	2.35	2.10
15440	12/24 S/T PET	.140	2.65	2.40	2.15
15445	12/24 S/T PET	.200	2.75	2.50	2.20
15505	15/30 S/E GRI Key	.140	2.50	2.25	2.00
15510	15/30 S/T GRI Key	.140	2.40	2.15	2.95
15515	15/30 W/W GRI Key	.200	2.60	2.35	2.10
15600	18/36 S/E	.140	3.35	3.05	2.70
15610	18/36 S/T	.140	3.00	2.70	2.40
15615	18/36 W/W	.200	3.60	3.20	2.90
15700	22/44 S/E KIM/VEC	.140	2.98	2.90	2.75
15705	22/44 S/T KIM/VEC	.140	3.98	3.30	3.00
15710	22/44 W/W KIM/VEC	.200	3.49	3.20	2.85
15875	25/50 S/E	.140	4.65	4.20	3.75
15880	25/50 S/T	.140	4.55	4.10	3.65
15885	25/50 W/W	.200	4.85	4.35	3.90
16115	36/72 S/E	.140	6.50	5.85	5.20
16120	36/72 S/T	.140	6.55	5.90	5.25
16125	36/72 W/W	.200	6.75	6.10	5.40
16145	36/72 S/T	.200	6.50	5.85	5.20
16235	43/86 S/T Mot 6800	.140	6.60	5.95	5.30
16240	43/86 W/W Mot 6800	.200	7.80	7.05	6.25
16260	43/86 S/T Mot 6800	.200	6.50	5.85	5.20
16725	43/86 S/E Mot 6800	.140	7.20	6.50	5.75
K-1	Pol-Keys		.15	.12	.10

'D' TYPE SUBMINIATURE CONNECTORS.

PART NUMBER		DESCRIPTION.	QUANTITY 1-9pcs.	10-24pcs.	25-99pcs.
DE	9P	Male	$1.60ea.	$1.40ea.	$1.30ea.
DE	9S	Female	2.25ea.	2.00ea.	1.90ea.
DE	110963-1	2 pc. Grey Hood.	1.50ea.	1.35ea.	1.20ea.
DA	15P	Male	2.35ea.	2.15ea.	2.00ea.
DA	15S	Female	3.25ea.	3.10ea.	2.90ea.
DA	51211-1	1. pc. Grey Hood	1.40ea.	1.20ea.	1.15ea.
DA	51226-1	2 pc. Black Hood	2.50ea.	2.25ea.	2.00ea.
DA	110963-2	2 pc. Grey Hood	1.60ea.	1.35ea.	1.30ea.
DB	25P	Male	2.80ea.	2.60ea.	2.40ea.
DB	25S	Female	3.60ea.	3.40ea.	3.20ea.
DB	51212-1	1 pc. Grey Hood	1.50ea.	1.30ea.	1.10ea.
DB	51226-1	2 pc. Black Hood	1.90ea.	1.65ea.	1.45ea.
DB	110963-3	2 pc. Grey Hood	1.75ea.	1.50ea.	1.35ea.
DC	37P	Male	4.20ea.	4.00ea.	3.70ea.
DC	37S	Female	6.00ea.	5.75ea.	5.50ea.
DC	110963-4	2 pc. Grey Hood	2.25ea.	2.00ea.	1.75ea.
DD	50P	Male	5.50ea.	5.10ea.	4.75ea.
DD	50S	Female	9.40ea.	8.60ea.	8.00ea.
DD	51216-1	1 pc. Grey Hood	2.40ea.	2.20ea.	2. 00ea.
DD	110963-5	2 pc. Grey Hood	2.60ea.	2.40ea.	2.10ea.
D	20418-2	Hardware Set (1 Hood Set)	.90ea.	.80ea.	.70ea.

I.C. SOCKETS GOLD. W/WRAP 3 TURN
14 pin $0.40 ea.
16 pin 0.44 ea.

8080A PRIME.
$5.00 ea.

EIA 8 CONDUCTOR CABLES 8ft. Long. CLASS #1 Type Cables.
1. to 4 pcs. $22.00
5 to 9 pcs. 19.00

I.C. SOCKETS TIN.
14 pin $0.15 ea.
16 pin 0.17 ea.

CONNECTORS FOR CENTRONICS 700 SERIES. Amphenol 57-30360
1 to 4 pcs. $8.00 ea.
5 to 9 pcs. 6.00 ea.

COOLING FANS. Extra Quiet.
1 to 4 $18.00 ea.
5 to 9 17.00 ea.

TERMS: MINIMUM ORDER: $15.00 ADD $1.35 For Handling & Shipping. Orders over $30.00 in the U.S.A. We Pay the Shipping. CALIF. RESIDENTS: Please Add 6% Sales Tax.

NOTE: NO C.O.D. OR CREDIT CARD ORDERS WILL BE ACCEPTED.

PHONE: 213-988-6196


MAIL ORDERS TO:

BECKIAN ENTERPRISES
P.O. BOX #3089
SIMI VALLEY, CA 93063

Circle 331 on inquiry card.

THE STAR MODEM

From Livermore Data Systems



RS232 MODEM
SALE $135

IEEE 488 MODEM
SALE $

STAR Modem is the price performance leader with a full 2 YEAR FACTORY WARRANTY.

FORTH + $60.00

for APPLE or PET/CBM

A full-featured FORTH with enhancements. Fast and easy to use.

- conforms to FORTH Interest Group Standards
- cross compilier to produce either standard object modules or self contained ROMable modules
- built in macro conditional assembler
- complete string processing capabilities (including variable length strings)
- disk virtual memory for large programs (or small systems!)
- arrays (single or multiple dimensioned)
- full screen cursor controlled editor
- floating point and integer processing
- User's Guide and documentation

A product of IDPC Company

Requires 16K available RAM and one disk drive.

Z80A System SPECIAL $3500

- 64K memory
- 2.4 megabytes disk storage (2 8" 2D drives)
- 2 parallel and 2 serial ports
- CP/M 2.x included

KMMM Pascal for PET $75

A subset of standard Pascal with extensions

- Machine Language Pascal Source Editor
- Machine Language P-Code Compiler
- P-Code Interpreter (for debugging and learning)
- P-Code to machine language translator for optimized object code
- Run-time package
- User Manual and sample programs

Requires 16K minimum. Specify ROM version and disk or tape.

FLOPPY DISKS

as low as $1.85
(write for price list)

BASF 3M Verbatim maxell

EARL for PET (disk file based) $65

Editor, Assembler, Relocater, Linker

Generates relocatable object code using MOS Technology mnemonics. Disk file input (can edit files larger than memory). Links multiple object programs as one memory load. Listing output to screen or printer.

6502	7.45	10/6.95	50/6.55	100/6.15
6502A	8.40	10/7.95	50/7.35	100/6.90
6520 PIA	5.15	10/4.90	50/4.45	100/4.15
6522 VIA	6.90	10/6.50	50/6.10/	100/5.70
6532	7.90	10/7.40	50/7.00	100/6.60
2114-L450		4.45	20/4.25	100/3.95
2114-L300		5.65	20/5.35	100/4.95
2716 EPROM		13.45	5/12.75	10/11.85
4116-200 ns RAM (NEC)				**8 for 39**
6550 RAM (PET 8K)				12.70
S-100 Wire Wrap $2.65			Solder Tail	2.15

CASSETTES - AGFA PE-611 PREMIUM

High output, low noise, 5 screw housing, labels.

C-10 10/5.65 50/25.00 100/48.00

C-30 10/7.30 50/34.00 100/66.00

All other lengths available. Write for price list.

ATARI 800 $777

All Atari Modules 25% OFF

SPECIAL–purchase ATARI 800, receive extra 8K memory FREE.

EDUCATIONAL PLAN - buy 2 ATARI Computers, receive 1 ATARI FREE!

DISKS

(write for quantity prices)

SCOTCH (3M) 8"	10/3.00	50/2.85	100/2.75
SCOTCH (3M) 5"	10/2.95	50/2.80	100/2.70
Maxell 5"	10/3.65	50/3.40	100/3.15
Maxell 8" Double Dens.	10/4.10	50/3.95	100/3.80
Verbatim 5"	10/2.40	50/2.35	100/2.30
(add 1.00 for plastic storage box)			
BASF 5"	10/2.40	20/2.35	100/2.30
BASF 8"	10/2.40	20/2.35	100/2.30
Diskette Storage Pages			10 for 3.95
Disk Library Cases		8" – 2.85	5" – 2.15

Commodore CBM-PET SPECIALS



FREE Up to $235 free merchandise with purchase of one of following CBM-PET items!

		FREE
8032 32K - 80 column CRT	$1795	**235**
8016 16K - 80 column CRT	$1495	**205**
8050 Dual Disk Drive - 950,000 bytes	$1695	**220**
CBM Modem - IEEE Interface	$395	**50**
CBM Voice Synthesizer	$395	**50**
8N full size graphics keyboard	$795	**100**
16K Full Size Graphics or Business Keyboard	$995	**150**
32K Full Size Graphics or Business Keyboard	$1295	**205**
2040 Dual Disk Drive - 343,000 bytes	$1295	**205**
2022 Tractor Feed Printer	$795	**100**
C2N External Cassette Deck	$ 95	**12**
Used PETs (8, 16, and 32K)		CALL

WRITE FOR SYSTEM PRICES

EDUCATIONAL DISCOUNTS

Buy 2 PET Computers, get 1 FREE

CBM Full Size Graphics Keyboard	$ 74
WordPro I - for 8K PET	$ 25
WordPro II - 16K CBM, disk, printer	$ 85
WordPro III - 32K CBM, disk, printer	$170
WordPro IV - 8032, disk, printer	$255
VISICALC for PET (Personal Software)	$170
BPI General Ledger, A/P, A/R for PET	$270
Programmers Toolkit - PET ROM Utilities	$ 36.90
PET Spacemaker Switch	$ 22.90

Dust Cover for PET	$ 7.90
IEEE-Parallel Printer Interface for PET	$ 65.00
IEEE-RS232 Printer Interface for PET	$149.00
Centronics 737 Proportional Spacing Printer	$800
NEC Spinwriter - parallel	$2450
XYMEC HI-Q 1000 Intelligent Daisy Wheel	$
Leedex Video 100 12" Monitor	$ 129
Zenith Z19 Terminal (factory asm.)	$ 739
Zenith Z89 with 48K	$2150
Strobe Model 100 Plotter	$ 600
SYM-1	$209
SYM BAS-1 BASIC or RAE-½ Assembler	$ 85
KTM-2/80 Synertek Video Board	$349
KIM-1 (add $34 for power supply)	$159
Seawell Motherboard - 4K RAM	$195
Seawell 16K Static RAM - KIM, SYM, AIM	$320
KL-4M Four Voice Music Board and Visible Music Monitor (4 voice) for PET	$59.90
MICR-REVERSI for PET by Michael Riley machine language version - you can't win at Level 5.	$ 9.95
PAPER-MATE 60 Command PET Word Processor full-featured version by Michael Riley	$29.95

A P Products 15% OFF
A P Hobby-Blox 15% OFF

ALL BOOK and SOFTWARE PRICES DISCOUNTED

The 8086 Book (Osborne)	$12.75
Z8000 Assembly Language Programming (Osborne)	$10.60
PET Personal Computer Guide (Osborne)	$12.75
PET and the IEEE-488 Bus (Osborne)	$12.75
6502 Assembly Language (Osborne)	$ 9.90
Programming the 6502 (Zaks)	$10.45
6502 Applications Book (Zaks)	$10.45
6502 Software Cookbook (Scelbi)	$ 9.45


115 E. Stump Road
Montgomeryville, PA 18936 215-699-5826 **A B Computers**

WRITE FOR CATALOG.

Add $1.25 per order for shipping. We pay balance of UPS surface charges on all prepaid orders. Prices listed are on cash discount basis. Regular prices slightly higher.

Circle 332 on inquiry card.

Circle 333 on inquiry card.

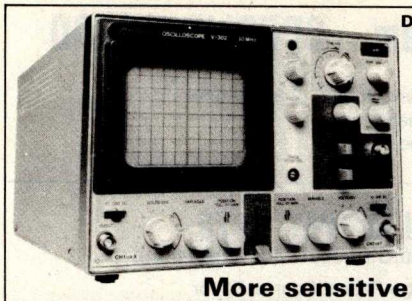

Dual Trace Oscilloscope
HITACHI 30 MHz

- TV sync-separater circuit
- High-sensitivity 1mV/div (5MHz)
- Sweep-time magnifier (10 times)
- Z-axis input (Intensity modulation)
- Signal delay line
- X-Y operation
- Trace Rotation

$945.00

More sensitive to your input

8080A
MICRO-PROCESSOR **$5.95**

2114L
(350 nS) STATIC RAM **$5.95**

CRT CONTROLLER
5037P **$39.90**

EPROM
2708 **$9.90**

EPROM
(5 Volt) 2716 **$14.80**

POWER SUPPLY
5 Volt 3 Amp
APS 5-3



1-9 ..... $42.50
10 up $40.65
25 up $38.85

★ 16% ★ DISCOUNT COUPON


Bring this **COUPON** into one of our stores or mail to our Mail Order address shown below and receive a **16% DISCOUNT** on purchases from this Ad of $100.00 or more.

Offer EXPIRES on November 30, 1980

NAME .....
ADDRESS .....
CITY ..... STATE .....
ZIP ..... PHONE NO .....

Coupons accepted only with full name and address filled in.

SD SYSTEMS



Z-80 STARTER SYSTEM

The Z80 Starter Kit by SD Systems uses the powerful Z80 microprocessor as the heart of the complete microcomputer on a single board. Learn a step-by-step introduction to microcomputers with a keyboard and display, audio cassette interface, PROM programmer, wire-wrap expansion area, 4-channel Counter Timer and on Board RAM and PROM. Complete Opperation and Instruction Manual included. ZBUG Monitor in ROM.

27004 kit .... $340 38007 assem/T.. $450

SBC-100 SINGLE BOARD COMPUTER KIT
27003 kit $295

PROM-100 BOARD KIT PROM Programmer
27014 kit $200

VERSAFLOPPY I FLEXIBLE DISK DRIVE Controller



27002 assem/T... $250
38005 assem/T... $335

VDB-8024 VIDEO DISPLAY BOARD



38013 assem/T... $470

Low Cost EPROM Erasing Lamps



- SIMPLE TO USE
- SAFETY INTERLOCK
- ERASES 4 CHIPS IN LESS THAN 20 MINUTES

UVS-1E $85.00



- HIGH INTENSITY 6W LAMP
- TUBE RATED AT 5000 HOURS
- ERASES 8 CHIPS IN LESS THAN 14 MINUTES

UVS-54T $155.00



- UNMATCHED INTENSITY AT 254 nm
- TUBE RATED IN EXCESS OF 10,000 HOURS
- ERASES 16 CHIPS IN LESS THAN 7 MINUTES


S-52T $355.00

PLESSEY



Metallized Polyester Capacitors
Series 160 MINIBOX SAMPLER
$26.00

AP PRODUCTS




923101 .. $ 79.95
923102 .... 124.95
923103 .... 124.95



SORCERER COMPUTER
SPEAKS YOUR LANGUAGE
FEATURES: Z80 — 4K ROM — 32K RAM — Dual Cassette I/O — 30 Lines of 64 Characters — 64 Defined Characters and 64 User Defined Characters — 512 x 240 Graphic Resolution — Edge Card Connection to S-100 Bus — Serial and Parallel I/O.

32K
Part No. DP1000-2
$1295


SD Systems EXPANDO RAM



27001 kit $220
38001 assem/T... $480

Add-On RAM Kit
27010 (16K, 8 devices) $165

SYM-1



NEW LOW PRICE
$239.00
KTM-2 CRT/TV Kybd Term $349

ANCRONA

Send check or Money Order to: P.O. Box 2208Y, Culver City CA 90230.
California residents add 6% sales tax. Minimum Order: $10.00
Add $2.00 to cover postage and handling. Master Charge and Visa welcomed.
Please include your charge card number,
Interbank number and expiration date. **PHONE ORDERS: (213) 641-4064**

MAIL ORDER	PORTLAND	SANTA ANA	CULVER CITY
P.O. Box 2208Y Culver City, CA 90230 (213) 641-4064	1125 N.E. 82nd Ave. Portland, OR 97220 (503) 254-5541	1300 E. Edinger Ave. Santa Ana, CA 92705 (714) 547-8424	11080 Jefferson Blvd Culver City, CA 90230 (213) 390-3595
TUCSON	**HOUSTON**	**ATLANTA**	**SUNNYVALE**
4518 E. Broadway Tucson, AZ 85711 (602) 881-2348	2649 Richmond Houston, TX 77098 (713) 529-3489	3330 Piedmont Rd. N.E. Atlanta, GA 30305 (404) 261-7100	1354 E. El Camino Real Sunnyvale, CA 94087 (408) 243-4121

Circle 334 on inquiry card.

apple II plus
+ With 48K of memory!
$1089.00




Plexiglass cover as shown **$24.95**

EPROMS

2708	1K x 8	$ 6.75	8 for $49
2716	2K x 8	14.95	8 for $110
2732	4K x 8	54.95	2 for $100

SINGLE 5 VOLT FOR 2716 & 2732



$17.95 LOGIC PROBE KIT

2114L 1024 x 4 Static RAM 450 ns **$4.50**

8038C VCO Waveform Gen w/sine **$2.65**

SOROC TECHNOLOGY, INC.




IQ120 **$699.00**

TRS-80
16K Memory Add-On
$46.66 KIT
With jumpers and instructions

74LS Series

74LS00	29	74LS156	115
74LS02	29	74LS158	75
74LS03	29	74LS160	89
74LS04	29	74LS161	85
74LS08	29	74LS162	89
74LS09	29	74LS163	89
74LS10	29	74LS164	89
74LS11	29	74LS165	89
74LS21	29	74LS170	175
74LS22	29	74LS174	75
74LS26	29	74LS175	75
74LS27	29	74LS190	75
74LS30	29	74LS193	89
74LS32	29	74LS365	89
74LS38	32	74LS189	89
74LS42	79	74LS221	1.40
74LS48	79	74LS240	1.65
74LS51	29	74LS241	1.65
74LS54	29	74LS243	1.65
74LS74	29	74LS244	1.45
74LS75	29	74LS245	2.25
74LS83	44	74LS253	89
74LS85	44	74LS257	89
74LS86	49	74LS258	89
74LS90	49	74LS259	1.65
74LS93	49	74LS279	.84
74LS107	39	74LS283	1.00
74LS112	39	74LS293	1.85
74LS113	39	74LS365	89
74LS123	49	74LS366	89
74LS125	49	74LS367	89
74LS126	49	74LS368	89
74LS138	89	74LS373	1.39
74LS151	89	74LS374	1.39
74LS153	44	74LS386	89



$124.95
apple clock/calendar
- Seconds, minutes, hours, day-of-week, month, date, & year.
- On board batteries with one year life.
- Uses MSM5832-crystal controlled.

With the purchase of the APPLE II 48K select from the below SPECIAL PRICING!


PKG OPTION Base2 printer....$599.00
Disk II w/cont.... 535.00
Disk II..... 475.00
Firmware Card. 149.00
UHF to RCA Cable. 5.00
PASCAL Card...399.00
Ser. Printer Cd... 179.00
SupRMod..... 23.00
3way I/O Select.. 33.00
Video 100 12".... 119.00

video 100



$129 Leedex Corp.
12" BLACK & WHITE LOW COST VIDEO MONITOR

APPLE EXPANSION KIT
16K Memory Add-On **$44.44**
MEMORY ADD-ON KIT INCLUDES INSTRUCTIONS



MODEL 800B
- Dot resolution graphics in six densities
- 1920 character buffer
- Fully adjustable tractors to 9-1/2"

$649.00

base 2 inc.

CONCORD COMPUTER COMPONENTS

1971 SOUTH STATE COLLEGE ANAHEIM, CA. 92806
VISA MASTER CHARGE
CHECK OR M O
NO COD
(714) 937-0637
We stock and sell over 12,000 types of semiconductors
MINIMUM ORDER $10.00
ADD $1.50 FOR FRT
CAL RES ADD 6%

MSM5832 MICROPROCESSOR REAL-TIME CLOCK/CALENDAR $7.45

GENERAL DESCRIPTION

The MSM5832 is a monolithic metal-gate CMOS integrated circuit that functions as a real-time clock/calendar for use in bus oriented microprocessor applications. The unit inputs a 32.768 Hz crystal controlled oscillator time base is counted down to provide addressable 4 bit BCD data of SECONDS, MINUTES, HOURS, DAY OF WEEK, DATE, MONTH, and YEAR. Data access is controlled by 4 bit address, chip select, read, write and hold inputs. Other functions include 12H-24H format selection, leap year identification and manual 30 second correction.

The MSM5832 normally operates from a 5 volt ± 5% supply. Battery back up operation down to 2.2 volts allows continuation of time keeping when main power is off. Very low standby power, rapid testing of the time keeping operation. The MSM5832 is offered in an 18 lead dual in line plastic (RS) suffix package.

150,000 customers have noticed the difference

At HOBBYWORLD, the difference is selection

In order to satisfy the needs of so many customers, you have to offer the widest possible selection of products. Hobbyworld does just that, and all under one roof! The Hobbyworld catalog offers hundreds of products to meet just about all of your electronics needs, including: Computer systems & accessories; Terminals, printers, disk drives & other peripherals; Computerized toys & games; Disks, diskettes & cassettes; Application boards; Integrated circuits and other electronics parts. We also feature a comprehensive library of software and books. Add to this the famous HOBBYWORLD quality guarantee, competitive prices, and superior service — and you've got selection that can't be beat!

What are you waiting for?

Act now! Call us toll free to request your free catalog, or circle the readers service number in this magazine — or fill out the coupon and send to:

HOBBYWORLD ELECTRONICS, INC.
19511 Business Ctr. Dr. Dept. B11
Northridge, California 91324

FREE HOBBYWORLD CATALOG


Name_____
Company_____
Address_____
City_____ **State**_____
Zip_____

Selection makes the difference.

HOBBYWORLD ELECTRONICS, INC.


Toll-Free: USA (800) 423-5387
Toll-Free: Calif. (800) 382-3651
Local & Outside USA: (213) 886-9200

Circle 336 on inquiry card.



BUILD YOUR OWN LOW COST MICRO-COMPUTER POWER SUPPLIES

FOR S-100 BUS, FLOPPY DISCS, ETC.



POWER TRANSFORMERS (WITH MOUNTING BRACKETS)

ITEM NO.	USED IN KIT NO.	PRI. WINDING TAPS	SECONDARY WINDING OUTPUTS 2×8 Vac	2×14 Vac	2×24 Vac	SIZE W × D × H	UNIT PRICE
T_1	1	0V, 110V, 120V	2×7.5A	2×2.5A	———	3¾"×3⅝"×3⅛"	21.95
T_2	2	0V, 110V, 120V	2×12.5A	2×3.5A	———	3¾"×4⅜"×3⅛"	27.95
T_3	3	0V, 110V, 120V	2×9A	2×2.5A	2×2.5A	3¾"×4⅜"×3⅛"	29.95
T_4	4	0V, 110V, 120V	2×4A	(28V, CT)	48V, CT, @3A	3¾"×3⅝"×3⅛"	22.95

POWER SUPPLY KITS (OPEN FRAME WITH BASE PLATE, 3 HRS. ASSY. TIME)

ITEM	USED FOR	@+8 Vdc	@−8 Vdc	@+16 Vdc	@−16 Vdc	@+28 Vdc	SIZE W×D×H	UNIT PRICE
KIT 1	15 CARDS SOURCE	15A	———	2.5A	2.5A	———	12"×6"×4⅞"	51.95
KIT 2	SYSTEM SOURCE	25A	———	3A	3A	———	12"×6"×4⅞"	58.95
KIT 3	DISC SYSTEM	15A	1A	2A	2A	4A	14"×6"×4⅞"	66.95
KIT 4	DISC SOURCE	6A	1A	1A	1A	5A	10"×6"×4⅞"	51.95

EACH KIT INCLUDES: TRANSFORMER, CAPACITORS, RESIS., BRIDGE RECTIFIERS, FUSE & HOLDER, TERMINAL BLOCK, BASE PLATE, MOUNTING PARTS AND INSTRUCTIONS. *OPTION OF KIT 4: **REPLACE +28V @ 5A BY +16 @ 6A.**

DISC DRIVE POWER SUPPLY "R3" ASSY. & TESTED, OPEN FRAME, SIZE: 9"(W)×6¼"(D)×4⅜"(H) **66.95**

SPECS: +5V @ 5A REGUL, OVP, −5V @ 1A REG., +24V @ 5A REG., SHORTS PROTECT. OPTIONS: 1. REPLACE +24V BY +12V 2. ADD ±12V @ 1A, $10.00 MORE.

IDEAL FOR 2 SHUGART 801/851 OR SIEMANS FDD 100-8/200-8 DISK DRIVES & ROCKWELL AIM-65.

SHIPPING FOR EACH TRANSFORMER: $4.75. FOR EACH POWER SUPPLY: $5.00 IN CALIF. $7.00 IN OTHER STATES. CALIF. RESIDENTS ADD 6% SALES TAX. OEM WELCOME.

VISA

MAILING ADDRESS:
P.O. BOX 4296
TORRANCE, CA 90510

SUNNY INTERNATIONAL
(TRANSFORMERS MANUFACTURER)
(213) 328-2425 MON-SAT 9-6

SHIPPING ADDRESS:
22129½ S. VERMONT AVE
TORRANCE, CA 90502

master charge THE INTERBANK CARD

SOFTWARE LABS

LSI-11 Z-80 8080 8085 6502

735 LOMA VERDE, PALO ALTO, CA. 94303 **PHONE: 415 493-8186**

Database Management Systems

HDBS A hierarchical Database Management System featuring fixed length records, read/write protection at file level and one to many set relationships.

Z-80 Optimized	250.00
8080 Optimized	325.00
6502 Optimized	325.00

MDBS A large computer DBMS with hierarchical and full network data structures (CODASYL Oriented). Explicit representation of one to one, one to many, many to one and many to many sets. Routines are callable from BASIC, PASCAL' COBOL or Machine Language.

Z-80 Optimized	750.00
8080 Optimized	825.00
6502 Optimized	825.00

Communications

BISYNC-80/3780 A full function IBM 2780/3780 emulator that provides one of the most widely used communications protocols. 550.00

BISYNC-80/HASP A full function Hasp Multi-leaving Workstation package. 800.00

BISYNC-80/ASYNC An asynchronous communications package that uses the full error correcting BISYNC protocol. 95.00

BISYNC-80/3270 A full function IBM 3275 or 3271/3277 terminal emulator that converts a "dumb" terminal into a very smart one. 550.00

Multiple License Pricing
- Upon Inquiry -

*LSI-11, PDP-11 TM DEC, UNIX TM Western Electric, CP/M TM Digital Research

High Level Languages

8080, 8085, Z-80 (Under OS-1 or CP/M)

BASIC

Microsoft Compiler	395.00
Microsoft "BASIC 80"	350.00

FORTRAN

Microsoft "FORTRAN 80" (Includes MACRO 80)	500.00

COBOL

Microsoft "COBOL 80"	750.00

"C"

Whitesmith's "C"	600.00

PL/1

Digital Research's PL/1	500.00

PASCAL

M.T. Compiler	250.00

Z-80 Optimized (Under OS-1 or CP/M)

COBOL

R-M Z-80 COBOL ANSI '74	750.00

LSI-11*/PDP-11* Under RT-11 or RSTS

COBOL - ANSI '74 Introducing:

RJ-11 Compiler	1750.00

Applications in COBOL '74

Available in R-M COBOL, COBOL 80 and RJ-11. (Source Included)

General Ledger	995.00
Accounts Receivable	995.00
Accounts Payable	995.00
Inventory Control	995.00
Order Entry/Invoicing	995.00
COMPLETE LEGAL	4200.00
COMPLETE DENTAL	4200.00

Why COBOL?
It's portable (ANSI '74) it's universal!

OPERATING SYSTEMS

Z-80 Optimized

OS-1™ A breakthrough in microcomputer software from Electrolabs! UNIX*-like OS with virtual I/O, bank-select memory control to 16 MBY and optional memory protection! Totally compatible with all CP/M programs. You will be amazed at the difference! Excellent brochure available. Includes editor, linker-loader, debugger, and one year update. 249.00

8080, 8085 & Z-80

CP/M Version 2.2	150.00
Manuals only	25.00
CP/M - MCZ Version 2.2. Runs on **ZILOG MCZ** and **PDS-8000** systems. Only from Software Labs!	200.00
Manuals only	35.00

OUR CATALOGUE

Software
Supplies
Media
Storage Equipment
Publications
- Upon Request -

TO ORDER

*Price of manuals applied against software purchase.

By Mail: Send check or money order (or P.O. from rated or institutional customers).


By Phone: Use Master Charge or Visa No.

Important Note: Please specify complete system hardware and software configuration with each order.

Circle 337 on inquiry card.

Contact us for new prices

Qume Datatrak 8



Double sided floppy with NO HEADACHES. Although many think this an impossibility, seeing is believing, and this drive is really something! Shugart compatible, fully optioned, reliable, and rapidly becoming the standard in double-sided diskdom.

$599. Two/$549.

Siemens FDD 100-8D

Single sided 8" floppy drive, the latest & greatest revision. Features double density plus much more. An extremely reliable drive $439 2/$409


Hard sector option kit... $9.95
Data separator option kit... $9.95

The following 5¼" mini-floppies share most features with their 8" cousins, so without further ado...

Siemens FDD 100-5D..... $279.
Qume Datatrak 5 (double sided).... 399.
BASF Mini mini..... 279.
SA 400..... 299.


All the above mini-floppies are fully SA400 compatible.

Manuals for all drives are $10, refundable against future purchase of drives. Also, all 8" drives can be ordered with 220 v/50 hz for world-wide use.



Disk controllers

Delta Products double density	$349
Micromation doubler	439
Tarbell single density, A & T	225
Tarbell single density, kit	184
Tarbell double density, DMA	425
Sorrento Valley 8" single density for Apple	375



Electrolabs' Monthly Special!!!

TELEVIDEO 912C $745
TELEVIDEO 920C 812

Features typewriter keyboard, microprocessor controls, Upper/lower case, adjustable baud rates (75-9600 baud), special function keys, much much more.

Second page memory option $29.00

Data Display Monitors

used 12" Sylvania monitors. Composite video, 12 MHz, 120 VAC. with new P-39 or P-4 tube, $79, used tube $59, OEM style (without case), subtract $12. U-fix model, 10/$300.

Hard Disk

CII HB 10 MBY fully REMOVEABLE cartridge drive. Complete with controller, personality card, media, power supply, cabling, connectors and documentation. Highlighted by stylish & modern cabinetry. $6995.


Shugart SA4008 20MBY fixed disk system. S-100, includes controller, power supply, and all that is necessary to run $6995.


4116 dynamic RAM, 16K Bonanza!!

Set of 8, 16K, for Apple, TRS-80, Exidy, Heath & more. 200 Ns., prime parts, at the unheard of $49/8.

Large discounts available for quantity & dealers (500 & up). Offer limited while supply lasts, as these will vanish quickly!!!

Accessories





Cable kits for 8" drives with 10' 50 cond. flat cable, power cable, and all connectors. Assembled if desired. One drive 27.50, two 33.95, three 38.95 for mini floppies (34 cond): one 24,95, two, 29.95

CP-206 Power-one power supply. Powers two drives more than adequately, top quality. 2.8A/24V, 2.5A/5V,.5A/-5V..... $99.

mini-floppy power supply $79

Electrolabs
POB 4436, Stanford, CA 94305
415-321-5601 800-227-8266
Telex: 345567 (Electrolab Pla)
Visa MC Am. Exp.



Media




8" ...$39.99 SS/SD
8" ...$49.00 SS/DD
8" ...$55.00 DS/SD
8" ...$59.00 DS/DD
5¼" $34.95 SS
5¼" $59.00 DS

Verbatim, Memorex, Scotch, or equivalent name brand

Special Introductory Offer!!!
Wabash 8" diskettes $29.00 SS
$39.00 DS

Price is cheap, but they run like champs!!!!

Diskette head cleaning kit for 5¼" or 8" $28.75 includes everything for 1 drive for 1 year. Alignment Diskette for Floppy Drives..... $39.00

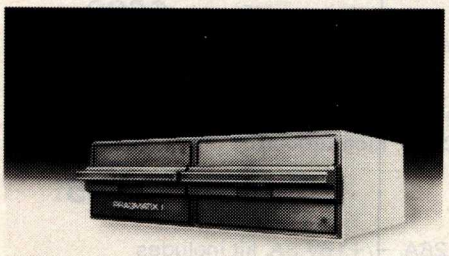


PRAGMATIX 1

Incredible!! — Two 8" Shugart compatible single sided floppy disk drives (double density), CP-206 power supply, in handsome color coordinated cabinet, with full cabling, connectors, and documentation, plus one box diskettes!!! All for an unprecedented $1865. Up to one MBY of storage.

with Qume Datatrak 8" double-sided drive $2495

ENCLOSURES



Rackmount Mainframe MT-200. This gorgeous beast is so appealing that it can easily function also as stand-alone mainframe. Very modern styling with fully actively terminated S-100 bus.

With two 8" single-sided disk drives... $1899.
With two 8" double sided disk drives in place of single-sided variety..... $2499.

Desktop Mainframe MT-100. Contemporary styling, a handsome cabinet coated with durable epoxy finish colors (blue, beige, off-white & silver). Easy to fit into an office environment. The proper way to start your system.

Above plus two 8" single sided disk drives..... $1599.
Above with two 8" double sided disk drives in place of single-sided variety..... $2199.


$25 min. order. Calif. residents add 6% sales tax. Orders under $75, add 5% shipping and handling, over $75 add 2.5%. All pricing subject to change without notice.

Circle 338 on inquiry card.

Circle 339 on inquiry card.

Add-On Disk Drive Subsystems

For Apple, TRS-80, S-100 Based Computers

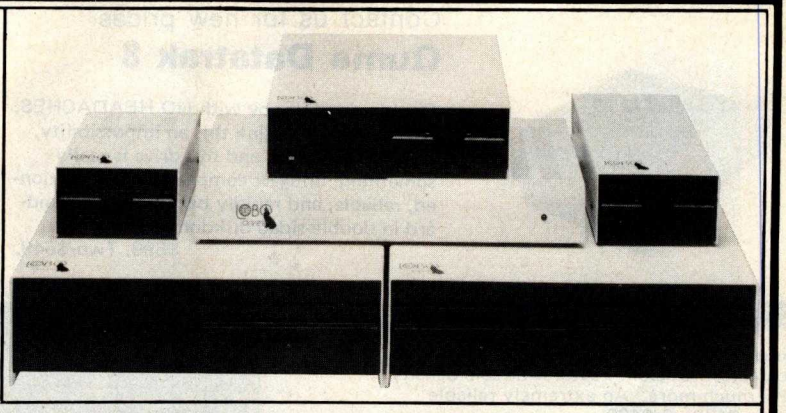

Expansion and **enhanced capabilities** are key words in achieving full utilization of your computer system. Our complete line of LOBO disk drive subsystems are the ideal, cost-effective way to provide the expansion capabilities you need to meet your system growth requirements. All of our subsystems are complete, thoroughly-tested, 100% burned-in, and feature a 1 year 100% parts/labor warranty.

APPLE

3101	Minifloppy
3101I	Minifloppy w/interface card
8101CA	One SA800 in cabinet w/power, SVA Controller, cable and manual
8202CA	Two SA800 in cabinet w/power, SVA Controller, cable and manual
5101CA	One SA850 in cabinet w/power, SVA Controller, cable and manual
5202CA	Two SA850 in cabinet w/power, SVA Controller, cable and manual

S-100 BASED COMPUTERS

MODEL NO.	DESCRIPTION
4101C	SA400 in cabinet w/power
8212C	Two SA801 in cabinet w/power
5212C	Two SA851 in cabinet w/power

GENERAL

MODEL NO.	DESCRIPTION
8212	Two SA801 in cabinet
8212C	Two SA801 in cabinet w/power
5212	Two SA851 in cabinet
5212C	Two SA851 in cabinet w/power

TRS80

MODEL NO.	DESCRIPTION	MODEL NO.	DESCRIPTION
4101C	SA400 in cabinet w/power	C808	Cable for TRS80 Eight-inch Floppy
8101C II	One SA800 in cabinet w/power for Mod. II	LX80	Double-density expansion interface
8202C II	Two SA800 in cabinet w/power for Mod. II	RS232	Dual Serial Port Option
C802	Cable for Mod. II	16K	16K Byte RAM for LX80 (32KB max.)
C805	Cable for TRS80 Minifloppy	VTOS	4.0 Disk Operating System

JR INVENTORY CO.,
P.O. Box 185, Santa Yuez, Ca., 93640
(805) 688-8781

1771 Junction Avenue
San Jose, California 95112
(408) 295-7247
(408) 295-7171

component supply, inc.

Yes! We supply IMSAI products . . .

RAM III Assembled & Tested: 64K Byte dynamic RAM BOARD— Utilizes the Intel 3242 refresh controller and a single delay line for total internal refresh. Uses time proven 4116 RAMS. Memory mapped I/O boards are allowed to coexist by the use of A16 buss pin 16.
Assembled & Tested **Price $350.**

I8080 SYSTEM Assembled & Tested: The basic 8080 based system. Includes CPA front panel, 22 slot motherboard (with all 22 edge connectors), MPU-A 8080 processor board, PS28 power supply (28AMP +8V 3AMP −16V), and chassis.
With MPU-A **$650.** Without MPU-A **$600.**

I8080 Options: Thinker Toys Motherboard $75 extra


I8080 ENCLOSURE Sheet Metal Only: THE ORIGINAL IMSAI: Mainframe with blue cover, cardguides and hardware spaced for 28A power supply, up to 22 slot motherboard.
- Either jump start or front panel
- Uses various motherboards

Price $95.

IMSAI PS28D Parts Kit: Mounts in the I8080 mainframe + 5V 28A, −/+16V 3A, kit includes board, transformer, and all components.
KIT $95.50

Terms: *(1) PREPAID—Send check for merchandise amount only— We pay the shipping —or— (2) UPS C.O.D. and bank card orders by phone or mail. Shipping charges will be added. California residents add 6½% sales tax.*


WRITE FOR FLYER OR VISIT OUR STORE



Circle 340 on inquiry card.

DIGITAL RESEARCH COMPUTERS
(214) 271-3538

32K S-100 EPROM CARD
NEW!



$74.95 KIT

USES 2716's

Blank PC Board - $34

ASSEMBLED & TESTED ADD $30

SPECIAL: 2716 EPROM's (450 NS) Are $14.95 EA. With Above Kit.

KIT FEATURES:
1. Uses +5V only 2716 (2Kx8) EPROM's.
2. Allows up to 32K of software on line!
3. IEEE S-100 Compatible.
4. Addressable as two independent 16K blocks.
5. Cromemco extended or Northstar bank select.
6. On board wait state circuitry if needed.
7. Any or all EPROM locations can be disabled.
8. Double sided PC board, solder-masked, silk-screened.
9. Gold plated contact fingers.
10. Unselected EPROM's automatically powered down for low power.
11. Fully buffered and bypassed.
12. Easy and quick to assemble.

16K DYNAMIC RAM PARTIALS
LOOK! **INTEL 2108 8K X 1 RAMS** LOOK!
8 FOR $9.95 32 FOR $35
FACTORY PRIME!

Huge special purchase of INTEL Dynamic RAM's. These are 2108-4, 300NS, 8K, Ceramic DIP. The 2108 is the INTEL 2116 (16K) tested for either upper or lower 8K only. These are factory prime. Full Spec. See INTEL 1978 Cat. for details or Memory Design Handbook for application data. Both IMSAI and EXTENSYS did mfg. S-100 RAM boards using these devices. — P.S. These devices will not work in the SD EPANDORAM™. Please specify upper or lower 8K. (S1626 or S1627). A super easy RAM to interface to a Z80, 16 PIN DIP.


FOR 4MHZ **PRICE CUT!** **LOW POWER - 300NS 2114 RAM SALE!** **8 FOR $37.50**

4K STATIC RAM'S. MAJOR BRAND, NEW PARTS.
These are the most sought after 2114's, LOW POWER and 300NS FAST.
8 FOR $37.50

16K STATIC RAM KIT-S 100 BUSS
PRICE CUT!

$199.95 KIT

FOR 4MHZ ADD $10

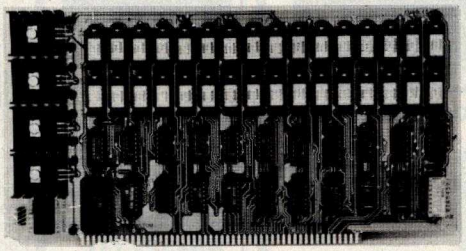

KIT FEATURES:
1. Addressable as four separate 4K Blocks.
2. ON BOARD BANK SELECT circuitry. (Cromemco Standard!). Allows up to 512K on line!
3. Uses 2114 (450NS) 4K Static Rams.
4. ON BOARD SELECTABLE WAIT STATES.
5. Double sided PC Board, with solder mask and silk screened layout. Gold plated contact fingers.
6. All address and data lines fully buffered.
7. Kit includes ALL parts and sockets.
8. PHANTOM is jumpered to PIN 67.
9. LOW POWER: under 1.5 amps TYPICAL from the +8 Volt Buss.
10. Blank PC Board can be populated as any multiple of 4K.

BLANK PC BOARD W/DATA-**$33**
LOW PROFILE SOCKET SET-**$12**
SUPPORT IC'S & CAPS-**$19.95**
ASSEMBLED & TESTED-**ADD $35**


OUR #1 SELLING RAM BOARD!

16K STATIC RAM SS-50 BUSS
PRICE CUT!

$210 KIT

FULLY STATIC!

FOR 2MHZ ADD $10



FOR SWTPC 6800 BUSS!

ASSEMBLED AND TESTED - $35

KIT FEATURES:
1. Addressable on 16K Boundaries
2. Uses 2114 Static Ram
3. Fully Bypassed
4. Double sided PC Board. Solder mask and silk screened layout
5. All Parts and Sockets included
6. Low Power: Under 1.5 Amps Typical

BLANK PC BOARD—**$30** COMPLETE SOCKET SET—**$12**
SUPPORT IC'S AND CAPS—**$19.95**

NEW! **STEREO! S-100 SOUND COMPUTER BOARD** NEW!

At last, an S-100 Board that unleashes the full power of two unbelievable General Instruments AY3-8910 NMOS computer sound IC's. Allows you under total computer control to generate an infinite number of special sound effects for games or any other program. Sounds can be called in BASIC, ASSEMBLY LANGUAGE, etc.

COMPLETE KIT! $84.95 (WITH DATA MANUAL)

BLANK PC BOARD W/DATA $31

KIT FEATURES:
- ★ TWO GI SOUND COMPUTER IC'S.
- ★ FOUR PARALLEL I/O PORTS ON BOARD.
- ★ USES ON BOARD AUDIO AMPS OR YOUR STEREO.
- ★ ON BOARD PROTO TYPING AREA.
- ★ ALL SOCKETS, PARTS AND HARDWARE ARE INCLUDED.
- ★ PC BOARD IS SOLDERMASKED, SILK SCREENED, WITH GOLD CONTACTS.
- ★ EASY, QUICK, AND FUN TO BUILD. WITH FULL INSTRUCTIONS.
- ★ USES PROGRAMMED I/O FOR MAXIMUM SYSTEM FLEXIBILITY

Both Basic and Assembly Language Programming examples are included.

SOFTWARE:
SCL™ is now available! Our Sound Command Language makes writing Sound Effects programs a SNAP! SCL™ also includes routines for Register-Examine-Modify, Memory-Examine-Modify, and Play-Memory. SCL™ is available on CP/M* compatible diskette of 2708 or 2716. Diskette - **$24.95** 2708 - **$19.95** 2716 - **$29.95** Diskette includes the source. EPROM'S are ORG at E000H.

4K DYNAMIC RAM BLOWOUT!
SAME AS INTEL 2107B!
4K RAMS AT AN UNBELIEVABLE 50¢ EACH!!!

Prime, new, National Semi., 1979 date coded, full spec. parts. N.S. #MM5280-5N. Same as INTEL 2107B-4, T.I. TMS4060, NEC uPD411, etc. We bought a HUGE QTY. from a West Coast Distributor at truly DISTRESS PRICES! One of the most popular and reliable RAM's ever made. These parts have been used by almost all Major Computer Main Frame Mfg. the world over! Arranged as 4K x 1, 270 NS Access Time, 22 Pin Dip. These units DO NOT use multiplexed addressing, thus making REFRESH and other timing very simple. See INTEL MEMORY DESIGN HANDBOOK for full application notes. The NAT. SEMI. MEMORY DATA BOOK is available at most Radio Shack Stores. Prime units in original factory tubes!

(With Pin Out Data) **#5280-5N 4096 BITS x 1 270 NS ACCESS**
8 FOR $4.95 32 FOR $16
FACTORY CASE (450 PCS) — $180
Sockets Special: 22 Pin Low Profile (With Purchase of 5280's) 8 FOR $1.

COMPUTER PARTS SPECIALS

74LS175 - **.99**	8035 Intel Single Chip CPU - **5.95**
74LS240 - **1.79**	Signetics 2901 4 Bit Slice - **6.95**
74LS241 - **1.79**	AMD 2903 4 Bit Super Slice - **12.50**
74LS244 - **1.79**	AMD 29705 Dual Port RAM - **8.95**
74LS373 - **1.99**	

NEW! G.I. COMPUTER SOUND CHIP

AY3-8910. As featured in July, 1979 BYTE! A fantastically powerful Sound & Music Generator. Perfect for use with any 8 Bit Microprocessor. Contains: 3 Tone Channels, Noise Generator, 3 Channels of Amplitude Control. 16 bit Envelope Period Control, 2-8 Bit Parallel I/O. 3 D to A Converters, plus much more! All in one 40 Pin DIP. Super easy interface to the S-100 or other busses. **$11.95** **PRICE CUT!**

SPECIAL OFFER: ~~$14.95~~ each Add $3 for 60 page Data Manual.

Digital Research Computers
(OF TEXAS)
P.O. BOX 401565 • GARLAND, TEXAS 75040 • (214) 271-3538


TERMS: Add $1.50 postage. We pay balance. Orders under $15 add 75¢ handling. No C.O.D. We accept Visa and MasterCharge. Tex. Res. add 5% Tax. Foreign orders (except Canada) add 20% P & H 90 Day Money Back Guarantee on all items: Orders over $50, add 85¢ for insurance.

***TRADEMARK OF DIGITAL RESEARCH. NOT ASSOCIATED WITH DIGITAL RESEARCH OF CALIFORNIA, THE SUPPLIERS OF CPM SOFTWARE.**

Circle 341 on inquiry card.

HEX ENCODED KEYBOARD

Four onboard LEDs indicate the HEX code generated for each key depression. The board requires a single +5 volt supply. Board only $15.00 Part No. HEX-3, with parts $49.95 Part No. HEX- 3A. 44 pin edge connector $4.00 Part No. 44P.




ASCII TO CORRESPONDENCE CODE CONVERTER

This bidirectional board is a direct replacement for the board inside the Trendata 1000 terminal. The on board connector provides RS-232 serial in and out. Sold only as an assembled and tested unit for $249.95. Part No. TA 1000C

ASCII KEYBOARD


53 Keys popular ASR-33 format • Rugged G-10 P. C. Board • Tri-mode MOS encoding • Two-Key Rollover • MOS/DTL/TTL Compatible • Upper Case lockout • Data and Strobe inversion option • Three User Definable Keys • Low contact bounce • Selectable Parity • Custom Keycaps • George Risk Model 753. Requires +5, -12 volts. $59.95 Kit.

T.V. INTERFACE




● Converts video to AM modulated RF, Channels 2 or 3. So powerful almost no tuning is required. On board regulated power supply makes this extremely stable. Rated very highly in Doctor Dobbs' Journal. Recommended by Apple ● Power required is 12 volts AC C.T., or +5 volts DC ● Board only $7.60 part No. 107, with parts $13.50 Part No. 107A

TAPE INTERFACE




● Converts a low cost tape recorder to a digital recorder ● Works up to 1200 baud ● Digital in and out are TTL-serial ● Output of board connects to mic. in of recorder ● Earphone of recorder connects to input on board ● No coils ● Requires +5 volts, low power drain ● Board only $7.60 Part No. 111, with parts $29.95 Part No. 111A

T.V. TYPEWRITER



● Stand alone TVT ● 32 char/line, 16 lines, modifications for 64 char/line included ● Parallel ASCII (TTL) input ● Video output ● 1K on board memory ● Output for computer controlled curser ● Auto scroll ● Non-destructive curser ● Curser inputs: up, down, left, right, home, EOL, EOS ● Scroll up, down ● Requires +5 volts at 1.5 amps, and -12 volts at 30 mA ● All 7400, TTL chips ● Char. gen. 2513 ● Upper case only ● Board only $39.00 Part No. 106, with parts $145.00 Part No. 106A

UART & BAUD RATE GENERATOR



● Converts serial to parallel and parallel to serial ● Low cost on board baud rate generator ● Baud rates: 110, 150, 300, 600, 1200, and 2400 ● Low power drain +5 volts and -12 volts required ● TTL compatible ● All characters contain a start bit, 5 to 8 data bits, 1 or 2 stop bits, and either odd or even parity. ● All connections go to a 44 pin gold plated edge connector ● Board only $12.00 Part No. 101, with parts $35.00 Part No. 101A, 44 pin edge connector $4.00 Part No. 44P

ASCII KEYBOARD

TTL & DTL compatible • Full 67 key array • Full 128 character ASCII output • Positive logic with outputs resting low • Data Strobe • Five user-definable spare keys • Standard 22 pin dual card edge connector • Requires +5VDC, 325 mA. Assembled & Tested. Cherry Pro Part No. P70-05AB. $119.95.




SOROC IQ 120



Upper/lower case display • Numeric keypad & cursor keys • Protected fields, ½ intensity display • RS 232 interface & aux. port. IQ120—$799.95 • IQ140 Detachable keyboard—$1199.95

MODEM




● Type 103 ● Full or half duplex ● Works up to 300 baud ● Originate or Answer ● Serial TTL input and output ● connect 8 Ω speaker and crystal mic. directly to board ● Requires +5 volts ● Board only $7.60 Part No. 109, with parts $29.95 Part No. 109A.

44 BUS MOTHER BOARD




Has provisions for ten 44 pin (.156) connectors, spaced 3/4 of an inch apart. Pin 20 is connected to X, and 22 is connected to Z for power and ground. All the other pins are connected in parallel. This board also has provisions for bypass capacitors. Board cost $15.00 Part No. 102. Connectors $3.00 each Part No. 44WP.

A-to-D D-to-A CONVERTER




Analog to Digital, Digital to Analog Converter, A-D conversion time 20us. D-A conversion 5us. Uses include speech and music synthesizing and slow scan TV. Single power supply (5V), 8 Bits wide, latched I/O, strobe lines. Part No. 79287K Complete Kit $49.95 • Part No. 79287A Assembled $69.95

RS-32/TTL INTERFACE




● Converts TTL to RS-232, and converts RS-232 to TTL ● Two separate circuits ● Requires -12 and +12 volts ● All connections go to a 10 pin edge connector, kit $9.95 Part No. 232A 10 Pin edge connector $3.00 part No. 10P.

COMPUCOLOR II



With reg. keyboard MOD3 8K $1449.95 MOD4 16 K $1495.95 MOD5 32K $1699.95 Without disk drive subtract $450.00. Add-on drives, $495.00. With 101 key option add $134.95. With 117 key option add $179.95.

RS-232/20mA INTERFACE



This board has two passive, opto-isolated circuits. One converts RS-232 to 20mA, the other converts 20mA to RS-232. All connections go to a 10 pin edge connector. Requires +12 and -12 volts. Board only $9.95, part no. 7901, with parts $14.95 Part No. 7901A.


SOLID STATE SWITCH





Your computer can control power (120VAC) to your printer, lights, and other 120VAC appliances up to 720 watts (6AMPS at 120VAC). Input 3 to 15 VDC, 2-13 MA TTL compatible, isolation 1500V. Part No. 79000K 1 Channel Kit $9.95 • Assm. $12.50 • Part No. 79004K 4 Channel Kit $34.95 • Assm. $44.95.

SUPER MODEM



Orignate, RS-232 and 20 mA compatable, Full duplex, and half duplex, direct connect or acoustic coupled, on board power supply, carrier detect light, DB25 plug, 300 BAUD, Type 103 compatable frequencies, Bare board Part No. 2000, $19,95, Kit Part No. 2000A, $99.95.

DC POWER SUPPLY

● Board supplies a regulated +5 volts at 3 amps., +12, -12, and -5 volts at 1 amp. ● Power required is 8 volts AC at 3 amps., and 24 volts AC C.T. at 1.5 amps. ● Board only $12.50 Part No. 6085, with parts excluding transformers $42.50 Part No. 6085A



Send for FREE Catalog...a big self addressed envelope with 80¢ postage gets it fastest!

To Order: Mention part no., description, and price. In USA shipping paid by us for orders accompanied by check or money order. We accept C.O.D. orders (U.S. only) or a VISA or Master Charge no., expiration date, signature and phone no., shipping charges will be added. CA residents add 6.5% for tax. Outside USA add 15% for air mail postage and handling. Payment must be in U.S. dollars. Dealer inquiries invited. Prices subject to change without notice.

Order Line: (408) 448-0800

ELECTRONIC SYSTEMS Dept. B, P.O. Box 21638, San Jose, CA USA 95151

Circle 390 on inquiry card.


apple II Or APPLE II PLUS



16K $975.95, Extra 16K E.S. RAM installed $74.95, extra 32K E.S. RAM installed $148.95.

APPLE II HOBBY/ PROTOTYPING CARD
Part No. 7907 $14.95

APPLE II PARALLEL INTERFACE



Interfaces printers, synthesizers keyboards, and JBE A-D D-A Converter & Switches. This interface has 4 I/O ports with handshaking logic, 2-6522 VIA's and a 74LS74 for timing. Inputs and outputs are TTL compatible. Part No. 79295K Complete Kit—$69.95 • Part No. 79295A Assembled—$79.95

REAL TIME 100,000 DAY CLOCK

MT. HARDWARE Double the utility of your S-100 bus computer with a real-time clock that keeps time in 100μS increments for over 273 years. Program events for the entire period with real time interrupts...without derailing the system. Maintain a log of computer usage, time and date transaction printouts, call up lists. On-board battery backup. MHPX004—$349.00

16K EPROM




Uses 2708 EPROMS, memory speed selection provided, addressable anywhere in 65K of memory, can be shadowed in 4K increments. Board only $24.95 part no. 7902, with parts less EPROMs $49.95 part no. 7902A.

PET COMPUTER



With 16K & monitor—$895.00 • Dual Disk Drive—$1095.00

OPTO-ISOLATED PARALLEL INPUT BOARD FOR APPLE II



There are 8 inputs that can be driven from TTL logic or any 5 volt source. The circuit board can be plugged into any of the 8 sockets of your Apple II. It has a 16 pin socket for standard dip ribbon cable connection. Board only $15.00. Part No. 120, with parts $69.95. Part No. 120A.

VIDEO TERMINAL




16 lines, 64 columns • Upper and lower case • 5x7 dot matrix • Serial RS-232 in and out with TTL parallel keyboard input • On board baud rate generator 75, 110, 150, 300, 600, & 1200 jumper selectable • Memory 1024 characters (7-21L02) • Video processor chip SFF96364 by Neculonic • Control characters (CR, LF, →, ←, ↑, ↓, non destructive cursor, CS, home, CL • White characters on black background or vice-versa • With the addition of a keyboard, video monitor or TV set with TV interface (part no. 107A) and power supply this is a complete stand alone terminal • also S-100 compatible • requires +16, & −16 VDC at 100mA, and 8VDC at 1A. Part No. 1000A $199.95 kit.

PARALLEL TRIAC OUTPUT BOARD FOR APPLE II




This board has 8 triacs capable of switching 110 volt 6 amp loads (660 watts per channel) or a total of 5280 watts. Board only $15.00 Part No. 210, with parts $119.95 Part No. 210A

APPLE II* SERIAL I/O INTERFACE



Baud rate is continuously adjustable from 0 to 30,000 • Plugs into any peripheral connector • Low current drain. RS-232 input and output • On board switch selectable 5 to 8 data bits, 1 or 2 stop bits, and parity or no parity either odd or even • Jumper selectable address • SOFTWARE • Input and Output routine from monitor or BASIC to teletype or other serial printer • Program for using an Apple II for a video or an intelligent terminal. Also can output in correspondence code to interface with some selectrics. • Also watches DTR • Board only $15.00 Part No. 2, with parts $42.00 Part No. 2A, assembled $62.00 Part No. 2C

8K EPROM PICEON



• Programs 2708's address relocation of each 4K of memory to any 4K boundary • Power on jump and reset jump option for "turnkey" systems and computers without a front panel • Program saver software in 1 2708 EPROM $25. Bare board $35 including custom coil, board with parts but no EPROMS $139, with 4 EPROMS $179, with 8 EPROMS $219.

WAMECO PRODUCTS

With ELECTRONIC SYSTEMS parts

FDC-1 FLOPPY CONTROLLER BOARD will drive shugart, pertek, remex 5" & 8" drives up to 8 drives, on board PROM with power boot up, will operate with CPM (not included). PCBD $42.95

FPB-1 Front Panel. (Finally) IMSAI size hex displays. Byte or instruction single step. PCBD $42.95

MEM-1A 8Kx8 fully buffered, S-100, uses 2102 type RAMS. PCBD ..... $24.95, $168 Kit

QMB-12 MOTHER BOARD, 13 slot, terminated, S-100 board only ..... $34.95 $89.95 Kit

CPU-1 8080A Processor board S-100 with 8 level vector interrupt PCBD .. $25.95 $89.95 Kit

RTC-1 Realtime clock board. Two independent interrupts. Software programmable. PCBD ..... $25.95, $60.95 Kit

EPM-2 2708/2716 16K/32K EPROM card PCBD ..... $24.95 $49.95 with parts less EPROMS

QMB-9 MOTHER BOARD. Short Version of QMB-12. 9 Slots PCBD ..... $30.95 $67.95 Kit

MEM-2 16Kx8 Fully Buffered 2114 Board PCBD ..... $25.95, $269.95 Kit


YOU MUST REFER TO THIS AD TO GET THESE PRICES.

D.C. HAYES MICROMODEM



Fully S-100 bus compatible including 16-bit machines and 4 MHz processors. • Two software selectable Baud rates—300 Baud and a jumper selectable speed from 45 to 300 Baud. (110 standard). Supports originate and answer modes. • Direct-connect Microcoupler. This FCC-registered device provides direct access into your local telephone system, with none of the losses or distortions associated with acoustic couplers and without a telephone company supplied data access arrangement. • Auto-Answer/Auto-Call. The MICROMODEM 100 can automatically answer the phone and receive input; it can also dial a number automatically. • Automatic Reset and Disconnect. • Software compatible with the D.C. Hayes Associates 80-103A Data Communications Adapter. Micromodem-DCHA32625—$379.95

TIDMA




Tape Interface Direct Memory Access • Record and play programs without bootstrap loader (no prom) has FSK encoder/decoder for direct connections to low cost recorder at 1200 baud rate, and direct connections for inputs and outputs to a digital recorder at any baud rate • S-100 bus compatible • Board only $35.00 Part No. 112, with parts $110.00 Part No. 112A.

SYSTEM MONITOR


8080, 8085, or Z-80 System monitor for use with the TIDMA board. There is no need for the front panel. Complete with documentation $12.95.

RS-232/TTY INTERFACE




This board has two active circuits, one converts RS-232 to 20 mA, the other converts 20 mA to RS-232. Requires +12 and -12 volts. $9.95 Part No. 600A Kit.

SERIAL I/O



Four Serial I/O RS-232 ports. S-100 Bus, Software or jumper selectable baud rate (110, 300, 600, 1200, 2400, 4800, 9600, 19.2K), on board Xtal baud rate generator, Addressing, switch selectable, Parity or no parity (odd or even) switch selectable, 1 or 2 stop bits, 5 to 8 bits/character. Board only $29.95, Part No. 7908. With parts (kit) $199.95, Part No. 7908A.

S-100 BUS ACTIVE TERMINATOR



Board only $14.95 Part No. 900, with parts $24.95 Part No. 900A

Send for FREE Catalog...a big self addressed envelope with 80¢ postage gets it fastest!

To Order: Mention part no., description, and price. In USA shipping paid by us for orders accompanied by check or money order. We accept C.O.D. orders (U.S. only) or a VISA or Master Charge no., expiration date, signature and phone no., shipping charges will be added. CA residents add 6.5% for tax. Outside USA add 15% for air mail postage and handling. Payment must be in U.S. dollars. Dealer inquiries invited. Prices subject to change without notice.

Order Line: (408) 448-0800

ELECTRONIC SYSTEMS Dept. B, P.O. Box 21638, San Jose, CA USA 95151

Circle 390 on inquiry card.

6502 USERS!

Upgrade your present 6502 system to 6809 capability with a 65-09 module.

Simple installation. No modification to existing hardware required. Software also available for most major systems.

65-09 Module Kit $110.00
65-09 Module Assembled/Tested . . 135.00
2K Eprom Monitor 59.95

Michigan residents add 4% sales tax.
Send check, money order or COD to:

MICRO PROCESSOR SYSTEMS, INC.
37060 Garfield, Suite C4
Mt. Clemens, MI 48043
(313) 263-9440

Circle 342 on inquiry card.

OHIO SCIENTIFIC SYSTEMS


CALL FREE FOR OUR PRICES
(800) 558-0870
or
WRITE FOR CATALOG

FARAGHER & ASSOCIATES

7635 BLUEMOUND
MILWAUKEE, WI 53213
(414) 258-2588
In Wisconsin

Circle 343 on inquiry card.

HOLD THAT TIGER!
(OR OTHER PRINTER)



$99.00 plus $5.00 shipping

- STAND WITH PAPER-TRAY
- MADE FROM 3/4" STURDY STOCK
- OFFICE-TYPE WALNUT FINISH
- COMPLETELY ASSEMBLED. NOT A KIT
- 18"W x 12"D x 27"H

5¼% sales tax for IL orders

RMF PRODUCTS, INC.
P.O. Box 413 • Batavia, IL 60510
Phone (312) 879-0020
DEALER INQUIRIES INVITED

Circle 344 on inquiry card.

dbis
YOUR HEADQUARTERS FOR

OHIO SCIENTIFIC
SALES • SERVICE • SUPPORT

THE BEST NEW YORK AREA PRICES
ON ALL OHIO SCIENTIFIC COMPUTERS
– LOCAL USERS GROUP –
BUSINESS AND PERSONAL SYSTEMS

PROFESSIONAL BUSINESS SOFTWARE:
Systems now available:
Encumbered Budget Accounting
Inventory/Invoicing Export Management
Mailing List Payroll
Accounts Receivable Accounts Payable
Manuals available separately.....$35

ALSO AVAILABLE:
*Eaton LRC 7000+ Plain Paper Printer...$356.
*Okidata Microline 80 Printer-
upper/lower case, graphics, any paper,
software selectable print size.....695.


MASTERCHARGE & VISA WELCOME

Designers & Builders of Information Systems, Inc.

One Mayfair Road - Eastchester, New York 10707

(914)779-5292 **(212) 933-4170**

Circle 345 on inquiry card.



350 Char/Sec Low Cost Loader

Solid state photoelectronic components read all standard 5, 6, 7 or 8-level tapes. Smooth, quiet AC drive. Reliable high-speed paper tape data entry. Data amplifiers and "character ready" output available for CMOS or TTL interfaces. Standard interface or to your interface specifications. Fanfold boxes available.

Addmaster Corporation, 416 Junipero Serra Drive, San Gabriel, CA 91776, Telephone: (213) 285-1121, Telex: 674770 Addmaster SGAB

Circle 346 on inquiry card.

The Software Toolworks

H89/H8/Z89
SOFTWARE TOOLS THAT WORK

MYCHESS - Now on H89 - $34.95
Winner-1980 West Coast Computer Faire

- FULL SCREEN EDITORS
  For Text Files; For Graphics
- TEXT PROCESSING:
  TEXT Formatter
- LANGUAGES: C, LISP, Z80 and 8080 Macro Assemblers
- UTILITIES • GAMES

Only $19.95 - $39.95

All run under HDOS; some available for CP/M

Available at most Heathkit stores, or from
THE SOFTWARE TOOLWORKS
14478 Glorietta Drive
Sherman Oaks, Calif. 91423
(213) 986-4885

Heathkit is a registered trade mark of Heath Company
CP/M is a registered trade mark of Digital Research

Circle 347 on inquiry card.

COMPUTER EQUIPMENT & SOFTWARE BARGAINS



EVERY MONTH

BUY, SELL OR TRADE ALL TYPES OF COMPUTER EQUIPMENT AND SOFTWARE (pre-owned and new) among 20,000 readers nationwide in BIG (11x14") pages. Classified ads are *only* 10¢ per word and are indexed for *easy* and *fast* location. Subscription: $10 a year/12 issues. Money back guarantee.

COMPUTER SHOPPER
P.O. Box F-14
Titusville, FL 32780
(305) 269-3211
MasterCharge or VISA orders only,
Call **TOLL FREE 800-327-9920**

Circle 348 on inquiry card.

...add the sound dimension to your system

NOISEMAKER!

Soundboard uses two GI AY 3-8910 I.C.'s to generate sound effects under software control. PCB only $34.95. Send for additional information, check or money order to:

Ackerman Digital Systems, Inc.
110 North York Road • Suite 208
Elmhurst, Illinois 60126
Tel. 312-530-8992
(Illinois residents add 5% state sales tax.)

Circle 349 on inquiry card.

B1RD™

Versatile Interface Peripheral Board
Serial/Parallel I/O For The Apple II

SERIAL FEATURES: Software Baud Rate Select • 50-19.2 K Baud • Crystal Controlled • Partial 26 Pin Connector Strapping • RS232C

PARALLEL FEATURES: Centronics Compatible • Full 34 Pin I/O Connector Strapping • 16 I/O Lines + 4 Handshakes

ALSO: 256 Bytes On Board Ram • ALL GOLD Connectors/Sockets • 6 Foot 34 Conductor Ribbon Cable With Centronics Compatible Connector • 3 Foot Serial Ribbon Cable With Male DB25 Connector • 90 Day Limited Warranty • Documentation with Driver Software

SMS * VIP **$169.95 ea A & T**

Shipping Add 2.0% • Texas Residents Add 5% Sales Tax • Payment By Check or Money Order

B1RD * BOARDS
Southwestern Management Services, Ltd.
Box 7277 Austin Texas 78712
Phone 512-327-1834

Circle 350 on inquiry card.

DEALS □ DEALS □ DEALS

OUR BUYERS ARE IN CONTACT WITH EVERY MAJOR SUPPLIER AND O.E.M. BUY HERE AT 1000 PIECE

U.S. MICRO SALES

QUANTITY PRICES

ALL MERCHANDISE 100% GUARANTEED! 15 DAY FULL CASH REFUND!

664 N. MICHIGAN AVE. • SUITE 1016 • CHICAGO, ILLINOIS 60611
CALL TOLL FREE: 1-800-435-9357
(ILLINOIS RESIDENTS CALL: 815-485-4002)


TERMS: Prepayment – C.O.D. up to $100.00 – M/C, Visa
Please allow personal check to clear before shipment.

WRITE FOR FULL CATALOG!

JUST HOT STUFF

POWER SUPPLIES

If you can beat these prices we will be truly amazed. OEM's at 500 lot pay more than this. Call or write for full spec. sheets.



DISK POWER SUPPLIES				
PRIAM–SHUGART–CENTURY–MICROPOLIS				
+5V @ 9A	–5V @ .8A	+24V @ 7A	US-384	89.00
SHUGART – SIEMANS – MPI 5¼"				
+5V @ .5A	+12V @ .9A		US-340	33.50
+5V @ 2A	+12V @ 4A		US-323	56.25
SHUGART – SIEMANS – CDC 8"				
+5V @ 1A	–5V @ .5A	+24V @ 1.5A	US-205	52.50
+5V @ 2A	–5V @ .5A	+24V @ 3A	US-206	69.00
+5V @ 3A	–5V @ .6A	+24V @ 5A	US-162	89.00
+5V @ 1.7A	–5V @ 1.5A	+24V @ 2A	US-272	69.00
+5V @ 2A	+12V @ .4A	–12V @ .4A	US-HTAA	37.50

TELEVIDEO 912C

$665.00


Also have 920C, SOROC, HAZELTINE, etc. What we don't have is room on this page. Call Toll Free 800 number for prices.



C-ITOH PRINTER

$499.00

Look closely at the photo and see other adds in this rag at $995.00. Perfect units, warranteed. Only 500 pcs. Same story, manufacturerer had too many.



ATARI

800 – $899.00
400 – $499.00


As long as there is a price war, we will fight your battle. Compare at your local Dept. store and buy U$ MICRO.



S-100 POWER

$49.50

Simple Brute Force!
S-100 Power Supply,
30A @ +8V,
6A @ +16V,
6A @ –16V,
PC Board Design.



SPECIAL OF THE QUARTER

DUAL DRIVE SUBSYSTEM

$995.00




2 SHUGART 801R POWER SUPPLY

If this looks like a Lobo Drive System, don't be fooled. Just because it looks like one, works like one, smells like one, and tastes like one (?) doesn't mean it has to cost like one!


S1-MOD (KIT)

$239.00



Complete S-100 12 Slot Computer. Ample system power with regulated power for drives. Excellent for Subsystem or Hobby use. 4 hours to build. (6 conn. incl., less fans)


EXPANDABLE RAM (KIT)



This is the best all around 64K board you can buy. If after you see it, you don't agree return (unassembled) for full refund. Bank Select by extended address lines.

32K – $380.00 **64K – $450.00**


32K STATIC (KIT)



You have seen this well known board around for years. We bought 500 of them and plan on cornering the market! Bank Select on extended address lines.

$388.00


Z-80 CPU (KIT)



The first time this world popular CPU offered in Kit. 2 serial, 3 parallel, CTC, EProm Z-80 at 4 mhz. Software buad rate, etc.(less Prom)

$212.00

DMA DISK CONTROLLER (KIT)



How many DMA Disk Controllers are there on the market? Can't mention the name at this LOW, LOW, LOW, price.

$265.00

12 SLOT MOTHER



We have connectors and power supply too. Start your system with quality components. Terminated.

CONNECTORS $3.50 ea.

$22.50

SPECIALS OF THE MONTH


4116s — $4.25

Expansion 16K Dynamic RAMs for Apple, TRS-80 S-100 systems. T.I., Mostek Intel, Call for manufacturer.

200 NS

DIP-80 — $399.00

Don't be mislead by this LOW price. This is a rugged 100% Duty Cycle 7 by 7 Dot Matrix Printer. Brand new, factory warr.



• RS-232 ADD $65.00
• TRACTOR FEED ADD $70.00

2114s — $3.95

One of the world's two most popular STATIC RAMs. Factory prime tested units. Sold in lots of 8 only. FUJITSU, HITACHI, etc.

200 NS

TMS-4044 / MM-5257 / INTEL 2147 — $4.25

250 NS

The other of the world's most popular STATIC RAMs. This one is 4K by 1 organization. Don't buy Gold, buy these, the price won't last!

2716s — $13.50 (450 NS)
2708s — $6.95 (450 NS)

Remember when 2716s were $50.00 and hard to get? These units are so beautiful it's hard to part with them. But we will, for a small price. Guaranteed!

SHUGART DRIVE

8" 851R $585.00

8" 801R $385.00

Manufacturer had too many, buys at 1000 piece rate, sales dropped, so we got'em. Fantastic buy, get them while they last! Full warranty.

5¼" MINI — $265.00

Now is the time to expand that Trash-80 or Rotton Apple (no offense!) These go so fast. Quantities limited to those on hand. Hurry ! No Junkers! Factory warranty.

SHUGART / SIEMANS / MPI

Circle 351 on inquiry card.

Manufacturers, Dealers and Endusers

We buy, sell, trade and accept consignment on all new and used Micro Computers and Peripherals.

(602) 954-6109

COMPUTER WAREHOUSE

2222 E. Indian School Rd.
Phoenix, Arizona 85016

Circle 362 on inquiry card.

CASH·FLOW ANALYSIS$

PREDICTS CASH CRUNCH

DETERMINES OPTIMUM CASHFLOW USING PAYMENT PRIORITIES AND RECEIVABLE PROBABLITIES

MEASURES IMPACT OF POSSIBLE PURCHASES ON CASHFLOW

DOCUMENTS FINANCIAL ABILITY

$129 Ready to run on CP/M system.

ALPHA-OMEGA SYSTEMS, INC.
1504 3RD AVE. SUITE 700
SEATTLE, WA 98101

(206) 622-2719 VISA master charge

Circle 363 on inquiry card.

NEW!!!

32K Static Memory Board

For Digital Group Systems

New Layout
64K Addressing Decoded
Dip Switch Selectable
I/O Mapped Addressing to 256K
On Board Battery Back Up
Power Failure Inputs

VLSI COMPUTER SYSTEMS
601 W. 5th Street, Suite 103
Los Angeles, CA 90017
213-623-8682

Circle 364 on inquiry card.

LOW PRICES

HP 85	$2925.
Atari 400	$ 475.
Centronics 737	$ 875.
Base 2 800 MST	$ 629.
Diablo 630	$2439.
NEC Spinwriter	$2695.
MPI 88T	$ 675.
Code-a-phone 1750	$ 259.
Verbatim disks	$ 30.
5" or 8" cases	$ 3.
Novation D-CAT	$ 165.

American Express, Master Card & VISA accepted. Checks require time to clear. CA add Tax. All add 3% for shipping. We carry most all brands micros, terminals, printers, drives, memory, software, disks, accessories, calculators, telephone equipment and more. Send for our catalog. Call 24 hours or mail order to:

SP ELECTRONICS
P.O. Box 8265
Sacramento, CA 95818
(916) 442-2323

Circle 365 on inquiry card.

C-10 **SHORT CASSETTES** **50 FT.**



10 for $7.50

50 for $32.50

Premium tape and cassettes acclaimed by thousands of repeat order microcomputer users. Price includes labels, cassette box and shipping in continental U.S.A. VISA and M/C orders accepted. California residents add sales tax. Phone (415) 968-1604 24 hours.

MICROSETTE CO.
475 Ellis Street
Mt. View, CA 94043

Circle 366 on inquiry card.

PERTEC FD-200

Floppy Disk Drives

35% OFF LIST

Rebuilt, tested, like-new, with 90-day Warranty

$235.00 ea.

Any quantity, while supply lasts

Also available:
New and like-new Pertec 24MB, 10MB, Cartridge Hard Disk Drives, Magnetic Tape Drives and Controllers.

Call, write or TWX for more info.
IBEX COMPUTER CORPORATION
18730 Oxnard St., Tarzana, CA 91356
(213) 705-2517
VISA and Mastercharge accepted

Circle 367 on inquiry card.

MULTIMUSIC

PLAY MULTI-VOICE MUSIC ON YOUR APPLE][. NO HARDWARE CHANGES. MACHINE LANGUAGE MULTIPLEXES 1 TO 12 PARTS, OR MORE WITH REDUCED QUALITY. LO-RES GRAPHICS SHOWS VOICES CURRENTLY PLAYING. STANDARD NOTE NAMES WITH DIRECTIONS AND SAMPLES INCLUDED. REQUIRES APPLE][PLUS (OR ROMCARD), 32K, DISK][.

SC1408 - DISKETTE $39.00
VISA/MASTERCARD ACCEPTED.

SONORA COMPUTING
P.O. BOX 4841
ALBUQUERQUE, N.M. 87196

Circle 368 on inquiry card.

WE HAVE 8039 MICROCOMPUTERS

NEW PRIME PARTS

- TIMER APPLICATIONS
- CLOCKS
- SYSTEM CONTROLLERS
- KEYBOARD ENCODING
- 5 VOLT SUPPLY 6MHz
- ETC.

SEND CHECK FOR IMMEDIATE DELIVERY

1-5 $19 **6-25 $15**

OVER 25 $10

MARSHALL PHILLIPS
U.S.I., DEPT. 37
10324 S. DOLFIELD ROAD
OWINGS MILLS, MD 21117
(301) 363-3000 TELEX: 8-7675

Circle 369 on inquiry card.

SYSTEK, INC.

OSI & TRS DOS SOFTWARE

CIVIL ENGINEERS SURVEYORS

- Water Distribution Network Analysis
- Pressure Sewers
- Coordinate Geometry
- Matrix Algebra
- Roadway Alignment

SYSTEK, INC.
P. O. Drawer JJ
Miss. State, MS 39762

Circle 370 on inquiry card.

WE WILL NOT BE UNDERSOLD

16K MEMORY UPGRADE KITS 2 for $85 $45

for TRS-80*, Apple II, (specify): **Jumpers** $2.50

PRINTERS



NEC Spinwriter

Letter Quality High Speed Printer
Includes TRS-80* interface software, quick change print fonts, 55 cps, bidirectional, high resolution plotting, graphing, proportional spacing: R.O. $2550
R.O. with Tractor Feed $2650 KSR with Tractor Feed $2950

779 CENTRONICS TRACTOR FEED PRINTER $969
Same as Radio Shack line printer I

737 CENTRONICS FRICTION & PIN FEED PRINTER $799
9 x 7 matrix Same as Radio Shack line printer IV

730 CENTRONICS FRICTION & PIN FEED PRINTER $629
7 x 7 matrix Same as Radio Shack line printer II

P1 CENTRONICS PRINTER Same as Radio Shack quick printer $269

PAPER TIGER (IP440) Includes 2K buffer and graphics option $879
(IP460) Bidirectional, 160 cps, graphics and 2K buffer $1075

TI-810 Faster than Radio Shack line printer III. Parallel and serial w/TRS-80* interface software w/u + I case & paper tray $1589
Compressed print, vertical form control $1865

OKIDATA Microline 80 Friction and pin feed $549
Tractor Feed, friction, and pin feed $649
Microline 83 Bidirectional, 120 cps, uses up to 15" paper $1050

EATON LRC 7000 + 64 columns, plain paper $299

ANADEX DP-9500 $1359 DP-8000 $825

CAT MODEM Works same as Radio Shack Telephone Interface II $148

LEEDEX MONITOR Video 100 $119

ZENITH Color Monitor $379

SANYO Model VM 4509 9" Monitor $155

DISK OPERATING SYSTEMS

PATCHPAK #4 by Percom Data $ 8.95
CP/M® for Model I, Zenith $145 • for Model II, Altos $169.00
NEWDOS Plus 40track $ 99.00
NEWDOS 80 $135.00

ACCESSORIES

HEAD CLEANING DISKETTE: Cleans drive Read/Write head in 30 seconds. Diskettes absorb loose oxide particles, fingerprints, and other foreign particles that might hinder the performance of the drive head. Lasts at least 3 months with daily use. Specify 5¼" or 8". **$20 ea/$45 for 3**

FLOPPY SAVER: Protection for center holes of 5¼" floppy disks. Only 1 needed per diskette. Kit contains centering post, pressure tool, tough 7-mil mylar reinforcing rings. Installation tools and rings for 25 diskettes. **$ 11.95 Re-orders of rings only $ 7.95**

EXTERNAL DATA SEPARATOR: Eliminates data separation problems (crc). Improves reliability. This plug in unit comes fully assembled and tested. $ 29.95

RS232 $ 84.00

TRS232: Teletype current loop output from cassette port $ 49.00

DISK-DRIVE EXTENDER CABLES: Fits all mini-disk drives. $ 16.95

SIX (6) PRONG ISOLATOR: ISO-2 $ 54.00

AC FILTER/6 PRONG POWER STRIP $ 39.00

DISK DRIVE CABLES: 2 drive $29.00 4 drive $ 35.00

DUST COVERS: TRS-80/Apple $ 7.95


PLASTIC DISKETTE HOLDER: For ring binder, holds 20 $ 8.00

RF MODULATOR: Adapts video to TV $ 35.00

TRS-80 & OTHER MYSTERIES $ 18.95

NEC SPINWRITER THIMBLE $19.95 RIBBON $ 6.95

CCS CARDS: Parallel or serial $115.00



DISK DRIVES $314

40 track, 102K Bytes. Fully assembled and tested. Ready to plug-in and run the moment you receive it. Can be intermixed with each other and Radio Shack drive on same cable. TRS-80* compatible silver enclosure. 90 day warranty. One year on power supply. **External card edge included.**

FOR TRS-80*		
CCI-100	5¼", 40 Track (102K Bytes) for Model I	**$314**
CCI-280	5¼", 80 Track (204K Bytes) for Model I	$549
CCI-800	8" Drive for Model II (½ Meg Bytes)	$795
For Zenith Z89		
CCI-189	5¼", 40 Track (102K Bytes) add-on drive	$394
Z-87	Dual 5¼" add-on drive system	$995

DISKETTES — Box of 10 (5¼") – with plastic library case $24
8" double density for Model II (box of 10) $36

COMPLETE SYSTEMS

ALTOS 64K, DD, SS, 2-Drive, 1MB $3995
APPLE 16K $989
TRS-80* Model II-64K $3499
TRS-80* LEVEL II-16K with keypad $689
TRS-80* Expansion Interface $249
HEWLETT PACKARD HP-85 $2950
ZENITH Z89, 48K all-in-one computer $2500
ZENITH Z19 $735
TELEVIDEO 912B $745 912C $755 920B $769 920C $779
ATARI 400 $489 **ATARI 800 $749**
APF Game Only $99 **Complete System $499**
MATTEL INTELLIVISION $229

Software available for all Complete Systems

SOFTWARE FOR THE TRS-80* Software w/Manual

INTELLIGENT TERMINAL SYSTEM ST-80-III BY LANCE MIKLUS: Enables a TRS-80* to act as a dial-up terminal on any standard time sharing network. Provides a TRS-80* with control key, ESC Key, Repeat Key, Rub Out Key, Break Key, full upper and lower case support, selectable printer output and program selectable transmission rates $139

CCA-DATA MANAGEMENT SYSTEM: Automate your information processing tasks. You can create a file of customer information; quickly and easily add, delete or update records; search a file; keep a file in order of the value in any field; and print records and labels in any desired sequence or from just a part of a file. Requires 32K TRS-80 and one drive. $72.00

S & M SYSTEMS
INSEQ-80™: Indexed Sequential Access Method (ISAM) for the TRS-80 Model I. A must for anyone writing business programs. Eliminate wasted disk space from direct record processing. Split second access to any record. Access data records instantly via alpha/numeric "key" eg. Part NR, zip code or sequentially in ascending key sequence. Add/modify records in any order. Access up to three files per program — Files may be spread over multiple disks. Machine language processing from your basic program. Utility program to convert direct files to INSEQ-80 format. $49.00

FULLY INTERACTIVE ACCOUNTING PACKAGE: ISAM (INSEQ-80) based. Includes General Ledger, Accounts Payable, Accounts Receivable and Payroll. System runs "stand alone" or "co-ordinated G/L" at users option. Based on Osborne accounting method. Requires 32K, TRS-80, 2 or 3 drives. N/A CA.

General Ledger	$99
Accounts Receivable	$99
Accounts Payable	$99
Payroll	$99

Osborne books: Req'd as additional documentation $20 ea

INVENTORY Requires 32K, TRS-80, 1 drive $125
INSORT-80: Callable form BASIC via USR. Sorts "Random" Disk Files. "Disk" to "Disk" sort times — 350 records in 35 secs, 1000 records in 6 minutes, 3500 records in 12 minutes. Machine language processing. Up to 35 sort keys ascending/descending. Utility to build BASIC program. Runs under NEWDOS. $49.95

CP/M® BASED SOFTWARE for Zenith, Altos, Radio Shack, Apple Software w/Manual

Z-80 SOFTCARD FOR APPLE: Your key to future software expansion. Get the best of both worlds, Apple's 6502 and CP/M Z-80. Plug in the card and get a Z80. Supports Apple language card and all Apple peripherals. Comes with set of three manuals. $339

CCI-TELNET VERSION 5: A communication Package which enables microcomputer users to communicate both with Large Mainframes and other microcomputers. Extensive commands make it useful in many applications where communication between computers is necessary. Powerful terminal mode enabling user to save all data from a session on disk. Completely CP/M compatible. Multiple communication protocols supported. Able to transfer files in both directions without protocol where the other machine does not support any protocol. Extensive ON-SCREEN help. Source code provided. $149

MICROPRO-WORD-STAR: Menu driven visual word processing system for use with standard terminals. Text formatting performed on screen. Facilities for text paginate, page number, justify, center and underscore. User can print one document while simultaneously editing a second. Edit facilities include global search and replace. Read/Write to other text files, block move, etc. Requires CRT terminal with addressable cursor positioning. $399

DEALER (NATIONAL/INTERNATIONAL) INQUIRIES INVITED **Send for FREE Catalogue**

The CPU SHOP

TO ORDER CALL TOLL FREE 1-800-343-6522
Massachusetts residents call **(617) 242-3361**
For detailed technical information, call 617/242-3361
Hours: 10AM-6PM (EST) M-F (Sat. till 5)

5 Dexter Row, Dept. B11M
Charlestown, Massachusetts 02129

Massachusetts residents add 5% sales tax

Quantities on some items are limited

VISA®


master charge

*TRS-80 is a Tandy Corporation Trademark ®Digital Research

Circle 361 on inquiry card.

3M DISKETTES

For record reliability and quality buy 3M Scotch Diskettes. All Diskettes are in stock for immediate shipment. Call TOLL FREE (800) 235-4137 for prices and information. Visa and Master Card accepted. All orders sent postage paid.



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401 (In Cal. call
(805) 543-1037.)

Circle 352 on inquiry card.

Close-Out!!



Desk Top Computer

This unit is a computerized Electronic Secretary. It keeps time, date, calendar, message, and meeting files. Originally sold thru a major mail order house for over $450.00.

Technically, it's a 6507 MICRO, ROM, Ram, Planaplex Alpha Display, Ni-cad Battery, Power Supply, Keyboard, Wood and Aluminum Case with Schematic and Instructions.

Most of these Computers are warranty returns. We are offering refurbished like new units for **$99.95** and *as is* (most have minor problems) units for **$44.95**. Add **$4.95** per unit for shipping and handling per unit ordered. All units are complete as described. All sales are final. California Residents add 6.5% Sales Tax.

Send Payment and Order to:

Solid State Surplus
P.O. Box 32418/San Jose, CA 95152

Circle 353 on inquiry card.

FOR SALE:

Unused Polymorphic System 8813 with 32K Ram Memory with floppy disk drives, printer interface and Abern-Sopher Multiwriter III. System has Canadian import tax paid. Offers for complete system to:

Bishop Management,
#8—825 McBride Blvd.,
New Westminster, B. C.,
Canada, V3L 5B5.
(604) 525-8148.

Circle 354 on inquiry card.


OmniFORTH
FOR NORTH STAR DOS

- Based on fig-FORTH
- 8080 Compatible (SOLS, IMSAI, etc.)
- Excellent users manual and installation documentation
- Includes the interactive OmniFORTH compiler, Text EDITOR, File system utilities, and 8080 + Z80 ASSEMBLER
- Requires North Star DOS and 24K memory
- Specify disk density (SD or DD/QD)
- Price $64.95 plus $2.00 S&H

(Florida residents add 4% sales tax. U.S. Funds only. Additional shipping charges outside U.S.A.)

INTERACTIVE
COMPUTER SYSTEMS, INC.
6403 DiMarco Rd.•Tampa, FL 33614

Circle 355 on inquiry card.

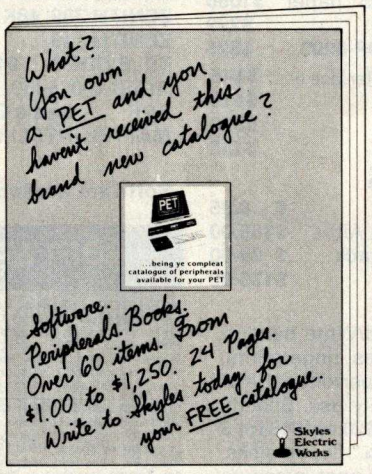


Skyles Electric Works

231 E South Whisman Road
Mountain View, CA 94041

Circle 356 on inquiry card.

SURPLUS ELECTRONICS

ASCII  ASCII

TRS-80* COMPATIBLE, IBM SELECTRIC® -BASED I/O TERMINAL
with ASCII conversion installed: $645.00

Many Other Items Available: Tape Drives; Cable; Cassette Drives; Wire; Power Supplies (5 volt 35 amp, others); Displays; Cabinets; Transformers; Heat Sinks; Printers; Components.

Send for Free Catalog
WORLDWIDE ELECTRONICS, INC.
130 Northeastern Blvd.
Nashua, N.H. 03062
Phone orders accepted using VISA or MC
Toll Free 1-800-258-1036
in NH 603-889-7661
*TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

Circle 357 on inquiry card.

J and S Computers

2247 Shetland Road
Livermore, Ca. 94550

Texas Instruments	
99/4 Computer	$1090.00
810 Basic Printer (100)	$1600.00
810 Full ASC II (201)	$1695.00
Exidy	
32K Sorcerer	$1074.00
48K Sorcerer	$1205.00
Lobo Disks	
SA 400 in cabinet w/power supply	$410.00
3101 I SA 400 for Apple w/interface	$487.00
SA 801 in cabinet w/power supply	$780.00
Centronics	
730-1 Parallel	$670.00
730-3 Serial	$715.00

and more...send $1.50 for a catalogue
California residents add 6% sales tax
All orders, add 3% shipping and handling

Circle 358 on inquiry card.

ATARI OWNERS

Parallel Printer Interface for the ATARI 400 / 800

Connects to controller jacks 3&4
works with BASIC / DOS / ASSEMBLER
Three printer connectors available:

	ATARI 400 /	800
TRENDCOM 100 / 200	A4P-1	A8P-1
CENTRONICS 730 / 737	A4P-2	A8P-2
CENTRONICS 36 PIN*	A4P-3	A8P-3

*Fits all other parallel Centronics plus Anadex, Base 2, Epson, Comprint and Microtek.
Order by part number, MC / VISA accepted.

$69.95 ◆CA sales add 6% tax

MACROTRONICS, inc.®
1125 N. Golden State
Turlock, CA 95380 (A)
(209) 667-2888 / 634-8888

Circle 359 on inquiry card.



DRUM DIGITAL PLOTTER

PRINTERS

COLOR GRAPHICS FROM SMALL PLOTTERS WITH BIG IDEAS.

But draw the line on price. That's practical!

232 SERIAL IN

FROM $310. SOFTWARE FURNISHED

WRITE FOR DETAILS TO
X and Y ENTERPRISES P.O. BOX 796
HUNTSVILLE, ALA. 35804
PHONE (205) 534-0177

Circle 360 on inquiry card.

Quest ELECTRONICS

P.O. Box 4430X
Santa Clara, CA 95054
Will calls: 2322 Walsh Ave.
(408) 988-1640

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

INTEGRATED CIRCUITS

7400TTL		LM323K-5	5.95	CD4026	2.50	4116 200ns	7.95	**CONNECTORS**	
7400N	.19	LM320K-12	1.50	CD4027	.66	8/4116 200ns	49.00	.30 pin edge	2.50
7402N	.20	LM320K-15	1.50	CD4028	.85	2513B	6.30	44 pin edge	2.75
7404N	.25	LM320T-5	1.35	CD4029	1.35	MM5262	.40	100 pin edge	4.50
7409N	.23	LM320T-8	1.35	CD4030	.45	MM5280	3.00	100 pin edge WW	5.25
7410N	.20	LM320T-12	1.35	CD4035	1.35	MM5320	9.95		
7414N	.70	LM320T-15	1.35	CD4040	1.35	MM5330	5.94	**IC SOCKETS**	
7420N	.20	LM324N	1.40	CD4042	.85	PD411D-3	4.00	**Solder Tin Low Profile**	
7422N	.39	LM339N	1.00	CD4043	.85	PD411D-4	5.00	**PIN 1 UP PIN 1UP**	
7430N	.20	LM340K-5	1.35	CD4044	.85	P5101L	8.95	8 .15 22 .30	
7442N	.58	LM340K-8	1.35	CD4046	1.67	4200A	9.95	14 .14 24 .35	
7445N	.74	LM340K-12	1.35	CD4049	.45	8052S	2.90	16 .16 28 .42	
7447N	.58	LM340K-15	1.35	CD4050	.49	91L02A	1.50	18 .27 36 .58	
7448N	.77	LM340K-24	1.35	CD4051	1.13	HD0165-5	6.95	20 .29 40 .57	
7450N	.20	LM340T-5	1.25	CD4060	1.42	MM57100	4.50	(specify red, amber, green, yellow, clear)	
7474N	.35	LM340T-8	1.25	CD4066	.71	GIAY38500-1	9.95		
7475N	.49	LM340T-12	1.25	CD4068	.40	MCM66751A	9.95	**CONTINENTAL SPECIALTIES in stock**	
7485N	.88	LM340T-15	1.25	CD4069	.40	9368	3.50	Complete line of breadboard test equip.	
7489N	1.85	LM340T-18	1.25	CD4070	.50	4100	10.00	**MAX-100 8 digit Freq. Ctr. $128.95**	
7490N	.43	LM340T-24	1.25	CD4071	.45	416	16.00		
7492N	.43	LM350	7.50	CD4072	.45			**OK WIRE WRAP TOOLS in stock**	
7493N	.43	LM377	3.50	CD4073	.45			**Portable Multimeter $18.00**	
7495N	.69	LM379	9.00	CD4075	.45	**CLOCKS**			
74100N	1.20	LM380N	1.00	CD4076	1.65	MM5311	5.50	Complete line of AP Products in stock.	
74107N	.35	LM381	1.60	CD4078	.40	MM5312	3.90		
74121N	.34	LM382	1.60	CD4081	.35	MM5369	2.10	**SPECIAL PRODUCTS**	
74123N	.59	LM703H	.65	CD4082	.35	MM5841	14.45	MM5865 Stopwatch Timer	
74125N	.45	LM709H	.28	CD4116	.47	MM5865	7.95	with 10 pg. spec.	9.00
74145N	.77	LM723H/N	.50	CD4490	5.50	CT7010	8.95	PC board	7.50
74150N	1.20	LM733N	.85	CD4507	1.00	CT7015	8.95	**Switches** Mom. Pushbutton	.27
74151N	.69	LM741CH	.35	CD4508	4.25	MM5375AA/N	3.90	3 pos. slide	.25
74154N	2.00	LM741N	.38	CD4510	1.02	MM5375AG/N	4.90	**Encoder** HD0165-5	6.95
74157N	.69	LM747H/N	.75	CD4511	.94	7205	16.50	**Paratronics 100A Logic Analyzer**	**$425.00**
74161N	.87	LM748N	.35	CD4515	2.52	7207	7.50	Model 10 Trigger Expander Kit	$229.00
74162N	1.25	LM1303N	1.75	CD4516	1.10	7208	15.95	Model 150 Bus Grabber Kit	$369.00
74163N	.87	LM1304	3.10	CD4518	1.02	7209	4.95	**Clock Calendar Kit**	**$23.95**
74174N	.96	LM1305	1.27	CD4520	1.02	DS0026CN	3.75	**2.5 MHz Frequency Counter Kit**	**$37.50**
74175N	.95	LM1307	2.00	CD4527	1.51	DS0056CN	3.75	**30 MHz Frequency Counter Kit**	**$47.75**
74190N	1.15	LM1310	2.75	CD4528	.79	MM53104	2.50		
74192N	.87	LM1458	.47	CD4553	3.50	**MICROPROCESSOR**		**TRANSFORMERS**	
74193N	.85	LM1812	7.50	CD4566	2.25	6.5536 MHz	4.50	6V 300 ma	3.25
74221N	2.75	LM1889	3.00	CD4583	2.35	14.31818 MHz	4.25	12 Volt 300 ma transformer	1.25
74298N	1.65	LM2111	1.75	CD4585	1.10	18.432 MHz	4.50	12.6V CT 600 ma	3.75
74365N	.89	LM2902	2.25	CD40192	3.00	6522	9.95	12V 250 ma wall plug	2.95
74366N	.89	LM3900N	.60	74C00	.35	6800	6.95	12V CT 250 ma wall plug	3.50
74367N	.89	LM3905	1.75	74C04	.40	6802	11.95	24V CT 400 ma	3.95
		LM3909N	.95	74C10	.35	6820	4.95	10V 1.2 amp wall plug	4.85
74LS00 TTL		MC1458V	.50	74C14	1.95	6850	5.95	12V 6 amp	12.95
74LS00N	.35	NE550N	1.00	74C20	.35	8080A	5.95	12V 500 ma wall plug	4.75
74LS02N	.35	NE555V	.39	74C30	.35	8085	12.95	12V 1 amp wall plug	6.50
74LS04N	.55	NE556A	.85	74C48	2.25	8086	75.00	10/15 VAC 8/16 VA wall plug	9.75
74LS05N	.40	NE565A	1.00	74C74	.85	Z80	9.95		
74LS08N	.45	NE566V	1.50	74C76	1.75	Z80A	11.95	**DISPLAY LEDS**	
74LS10N	.45	NE567V	1.00	74C90	1.75	8212	2.90	MAN1 CA .270	2.90
74LS13N	.55	NE570B	4.75	74C93	1.75	8214	3.95	MAN3 CC .125	.39
74LS14N	1.25	78L05	.60	74C154	3.00	8216	2.90	MAN72/74 CA/CA .300	1.00
74LS20N	.45	78L08	.60	74C160	2.00	8224	3.45	DL704 CC .300	1.25
74LS22N	.45	78M05	.85	74C175	1.35	8228	4.95	DL707/DL707R CA .300	1.00
74LS28N	.45	75108	1.75	74C192	2.25	8251	6.95	DL727/728 CA/CC .500	1.90
74LS30N	.45	75491CN	.50	74C221	2.50	8253	15.00	DL747/750 CA/CC .600	1.95
74LS33N	.75	75492CN	.55	74C905	6.00	8255	5.75	DL750 CC .600	1.95
74LS38N	.75	75494CN	.89	74C906	.75	8257	10.95	FND359 CC .357	.70
74LS74N	1.25			74C914	1.95	8259	14.95	FND500/507 CC/CA .500	1.35
74LS75N	1.00			74C922	6.00	1802CP plas.	13.95	FND503/510 CC/CA .500	.90
74LS90N	1.00	**A to D CONVERTER**		74C923	6.00	1802DP plas.	17.95	FND800/807 CC/CA .800	2.20
74LS93N	1.00	8038B	4.50	74C925	7.50	1861P	11.50	3 digit Bubble	.60
74LS95N	1.10	8700CJ	13.95	74C926	6.95	CDP1802CD	28.95	4 digit Bubble	.80
74LS107N	.65	8701CN	22.00	74C927	6.95	CDP1802D	35.00	DG8 Fluorescent	1.75
74LS112N	.65	8750CJ	13.95			CDP1861	15.95	DG10 Fluorescent	1.75
74LS113N	.45	ICL7109	9.95	**INTERFACE**				10 digit display	1.25
74LS132N	.89	9400CJV/F	7.40	8095	.65	**UART/FIFO**		7520 Clairex photocells	.39
74LS136N	.65	ICL7103	9.50	8096	.65	AY5-1013	5.50	TIL311 Hex	9.50
74LS151N	1.10	ICL7107	14.25	8097	.65	AY5-1014	7.50	MAN3640 CC .30	1.10
74LS155N	1.10			8098	.65	3341	6.95	MAN4610 CA .40	1.20
74LS157N	1.10	**CMOS**		8T09	1.25			MAN4640 CC .40	1.20
74LS162N	1.65	CD4000	.25	8T10	4.50	**8K/16K Eprom Kit**		MAN4710 CA .40	.95
74LS163N	1.65	CD4001	.35	8T11	3.00	(less PROMS)	$89.00	MAN4740 CC .40	1.20
74LS174N	2.00	CD4002	.35	8T20	5.50	**Motherboard**	$39.00	MAN6640 CC .56	2.95
74LS190N	1.25	CD4006	1.10	8T23	3.10	**Extender Board**	$15.00	MAN6710 CA .60	1.35
74LS221N	2.50	CD4007	.35	8T24	3.50			MAN6740 CC .60	1.35
74LS258N	1.60	CD4008	.28	8T25	3.20	**RESISTORS** ¼ watt 5%			
74LS367N	1.65	CD4009	.45	8T26	1.69	10 per type .03		**MA1002A**	**8.95**
		CD4010	.45	8T28	2.75	25 per type .025		**MA1002E**	**8.95**
LINEAR		CD4011	.35	8T97	1.69	100 per type .015		**MA1012A**	**8.95**
CA3045	.90	CD4012	.28	8T98	1.69	1000 per type .012		**102P3 transformer**	**2.25**
CA3046	1.10	CD4013	.47			5000 piece pack		**MA1012A Transformer**	**2.25**
CA3081	1.80	CD4014	1.25			5 per type 6.75			
CA3082	1.90	CD4015	1.00	**MOS/MEMORY RAM**		½ watt 5% per type .05			
CA3089	2.95	CD4016	.55	2101-1	2.95				
LM301AN/AH	.35	CD4017	1.05	2102-1	.95	**Televideo Terminal**			
LM308H	.87	CD4018	.94	2102AL-4	1.34	Model 912	$845.00		
LM307N	.35	CD4019	.45	2102AN-2L	1.60	Model 920	$945.00		
LM308N	1.00	CD4020	1.02	2104A-4	4.95				
LM309K	1.50	CD4021	1.35	2107B-4	3.75	**Tiny Basic Experimentors Kit**			
LM311H/N	.90	CD4022	1.10	2111-1	3.75		**$10.00**		
LM317T/K	3.75	CD4023	.28	2112-2	3.95				
LM318	1.35	CD4024	.75	2114L 300ns	6.75				
LM320K-5	1.50	CD4025	.28	2114L 450ns	5.95				

BSR Controller $39.95
Connect your computer to the BSR Home Control System. Computer controlled ultrasonic transmitter for your BSR. Software for 1802 user.



RCA Cosmac 1802 Super Elf Computer $106.95

Compare features before you decide to buy any other computer. There is no other computer on the market today that has all the desirable benefits of the **Super Elf** for so little money. The Super Elf is a small single board computer that does many **big** things. It is an excellent computer for training and for learning programming with its machine language and yet it is easily **expanded** with **additional memory, Full Basic, ASCII Keyboards, video character generation, etc.**

Before you buy another small computer, see if it includes the following features: ROM monitor; State and Mode displays; Single step; Optional address displays; Power Supply; Audio Amplifier and Speaker; Fully socketed for all IC's; Real cost of in warranty repairs; Full documentation.

The **Super Elf** includes a **ROM** monitor for program loading, editing and execution with **SINGLE STEP for program debugging** which is not included in others at the same price. With **SINGLE STEP** you can see the microprocessor chip operating with the **unique Quest** address and data bus displays **before, during** and **after** executing instructions. Also, CPU mode and instruction cycle are decoded and displayed on 8 LED indicators.

An RCA 1861 **video graphics** chip allows you to connect to your own TV with an inexpensive video modulator to do graphics and games. There is a **speaker system** included for writing your own music or using many music programs already written. The speaker amplifier may also be used to drive relays for control purposes.

A 24 key **HEX keyboard** includes 16 HEX keys plus **load, reset, run, wait, input, memory protect, monitor select** and **single step**. Large, on board displays provide output and optional **high and low address**. There is a 44 pin standard connector slot for PC cards and a 50 pin connector slot for the Quest Super Expansion Board. Power supply and sockets for **all** IC's are included in the price plus a detailed 127 pg. instruction manual which now includes over 40 pgs. of software info. including a series of lessons to help get you started and a music program and graphics target game. Many schools and universities are using the Super Elf as a course of study. OEM's use it for training and R&D.

Remember, other computers only offer Super Elf features at additional cost or not at all. **Compare before you buy. Super Elf Kit $106.95, High address option $8.95, Low address option $9.95. Custom Cabinet** with drilled and labelled plexiglass front panel **$24.95.** All metal Expansion Cabinet, painted and silk screened, with room for 5 S-100 boards and power supply **$57.00. NiCad Battery Memory Saver Kit $6.95.** All kits and options also completely assembled and tested.

Questdata, a software publication for 1802 computer users is available by subscription for $12.00 per 12 issues. Single issues $1.50. Issues 1-12 bound $16.50.

Tiny Basic Cassette **$10.00**, on ROM **$38.00**, original Elf kit board **$14.95. 1802 software;** Moews Video Graphics **$3.50.** Games and Music **$3.00**, Chip 8 Interpreter **$5.50.**

Super Expansion Board with Cassette Interface $89.95

This is truly an astounding value! This board has been designed to allow **you** to decide how you want it optioned. **The Super Expansion Board comes with 4K of low power RAM** fully addressable anywhere in 64K with built-in memory protect and a **cassette interface**. Provisions have been made for all other options on the same board and it fits neatly into the hardwood cabinet alongside the **Super Elf**. The board includes slots for up to 6K of **EPROM** (2708, 2758, 2716 or TI 2716) and is **fully socketed.** EPROM can be used for the monitor and Tiny Basic or other purposes.

A IK Super ROM Monitor $19.95 is available as an on board option in 2708 EPROM which has been preprogrammed with a program loader/editor and error checking multi file cassette read/write software, (relocatable cassette file) another exclusive from Quest. It includes register save and readout, block move capability and video graphics driver with blinking cursor. Break points can be used with the register save feature to isolate program bugs quickly, then follow with single step. If you have the **Super Expansion Board** and **Super Monitor** the monitor is up and running at the push of a button.

Other on board options include **Parallel Input and Output Ports** with **full handshake**. They allow easy connection of an ASCII keyboard to the input port. **RS 232 and 20 ma Current Loop** for teletype or other device are on board and if you need more memory there are two **S-100** slots for static RAM or video boards. Also a 1K Super Monitor version 2 with video driver for full capability display with Tiny Basic and a video interface board. **Parallel I/O Ports $9.85, RS 232 $4.50, TTY 20 ma I/F $1.95, S-100 $4.50.** A **50 pin connector set** with ribbon cable is available at $15.25 for easy connection between the **Super Elf** and the **Super Expansion Board.**

Power Supply Kit for the complete system (see Multi-volt Power Supply).

Announcing Quest Super Basic— *SECOND GENERATION*

A new enhanced version of **Super Basic** now available. Quest was the first company worldwide to ship a full size Basic for 1802 Systems. A complete function **Super Basic** by **Ron Cenker** including floating point capability with scientific notation (number range $\pm .17E^{38}$), 32 b1t integer ± 2 billion; multi dim arrays, string arrays; string manipulation; cassette I/O; save and load, basic, data and machine language programs; and over 75 statements, functions and operations.

Enhancements include increased speed, built-in provisions for Stringy Floppy, Floppy Disc, Printer Driver, I/O, user definable command library and statement renumbering.

Easily adaptable to most 1802 systems. Requires 16K RAM minimum for Basic and user programs. Source listing for both Serial and Parallel I/O included.

Super Basic on Cassette $40.00.

PROM Eraser

assembled. 25 PROM capacity **$37.50** (with timer **$69.50**). 6 PROM capacity OSHA/UL version **$69.50** (with timer **$94.50**).

Z80 Microcomputer

16 bit I/O, 2 MHz clock, 2K RAM, ROM Breadboard space. Excellent for control. Bare Board **$28.50.** Full Kit **$99.00.** Monitor **$20.00.** Power Supply Kit **$35.00. Tiny Basic $30.00**

S-100 Computer Boards

8K Static Godbout Econo IIA Kit	145.00
16K Static Godbout Econo XIV Kit	285.00
24K Static Godbout Econo VIIA-24 Kit	435.00
32K Static Godbout Econo X-32 Kit	575.00
16K Dynamic RAM Kit	199.00
32K Dynamic RAM Kit	310.00
64K Dynamic RAM Kit	470.00
Video Interface Kit	**$135.00**

80 IC Update Master Manual $55.00

Comp. IC data selector, 2700 pg. master reference guide. Over 51,000 cross references. Free update service through 1980. Domestic postage $3.50.

Modem Kit $60.00

State of the art, orig., answer. No tuning necessary. 103 compatible 300 baud. Inexpensive acoustic coupler plans included.

LRC 7000+Printer $389.00

40/20 column dot matrix impact, std. paper. Interface all personal computers.

64/40/32/20 version **$405.00.** Optional cables available.

LRC 7000 printer interface cable for Super Elf with software $26.00

NiCad Battery Fixer/Charger Kit

Opens shorted cells that won't hold a charge and then charges them up, all in one kit w/full parts and instructions. **$7.25**

Rockwell AIM 65 Computer

6502 based single board with full ASCII keyboard and 20 column thermal printer. 20 char. alphanumeric display, ROM monitor, fully expandable. **$375.00.** 4K version **$450.00**. 4K Assembler **$85.00**, 8K Basic Interpreter **$100.00.**

Special small power supply for AIM65 assem. in frame **$54.00.** Complete AIM65 in thin briefcase with power supply **$499.00.** Molded plastic enclosure to fit both AIM65 and power supply **$47.50.** Special Package Price: 4K AIM, 8K Basic, power supply, cabinet **$599.00**

AIM65/KIM/VIM/Super Elf 44 pin expansion board; 3 female and 1 male bus. Board plus 3 connectors **$22.95.**

60 Hz Crystal Time Base Kit $4.40

Converts digital clocks from AC line frequency to crystal time base. Outstanding accuracy.

Video Modulator Kit $8.95

Convert TV set into a high quality monitor w/o affecting usage. Comp. kit w/full instruc.

Multi-volt Computer Power Supply

8v 5 amp, ±18v .5 amp, 5v 1.5 amp, −5v .5 amp, 12v .5 amp, −12v option. ±5v, ±12v are regulated. Basic Kit **$29.95.** Kit with chassis and all hardware **$43.95.** Add $4.00 shipping. Kit of hardware **$14.00.** Woodgrain case **$10.00.** $1.50 shipping.

Gremlin Color Video Kit $69.95

32 x 16 alpha/numerics and graphics; up to 8 colors with 6847 chip; 1K RAM at E000. Plugs into Super Elf 44 pin bus. No high res. graphics. On board RF Modulator Kit **$4.95**

Elf II Adapter Kit $24.95

Plugs into Elf II providing Super Elf 44 and 50 pin plus S-100 bus expansion. (With Super Expansion). High and low address displays, state and mode LED's optional **$18.00.**

1802 16K Dynamic RAM Kit $149.00

Expandable to 32K. Hidden refresh w/clocks up to 4 MHz w/no wait states. Addl. 16K RAM **$63.00**

Super Elf 44 pin expansion board; 3 female and 1 male bus. Board plus 3 connectors **$22.95**

Tiny Basic Extended on Cassette (added commands include Stringy, Array, Cassette I/O etc.)	**$15.00**
S-100 4-Slot Expansion	**$ 9.95**
Super Monitor VI.I Source Listing	**$15.00**

Super Color S-100 Video Kit $129.95

Expandable to 256 x 192 high resolution color graphics. 6847 with all display modes computer controlled. Memory mapped. 1K RAM expandable to 6K. S-100 bus 1802, 8080, 8085, Z80 etc.

Editor Assembler (Requires minimum of 4K for E/A plus user source)	**$25.00**
1802 Tiny Basic Source listing	**$19.00**
Super Monitor V2.0/2.1 Source Listing	**$20.00**

TERMS: $5.00 min. order U.S. Funds. Calif residents add 6% tax.
$10.00 min. order BankAmericard and Master Charge and COD. $1.00 insurance optional.
Shipping charges will be added on charge cards.

FREE: Send for your copy of our NEW 1980 QUEST CATALOG. Include 48¢ stamp.

Circle 371 on inquiry card.

Get the inside copy of CP/M*

Just purchase a Jade Double-D or CCS double density disk controller this month and CP/M* 2.2 is yours for free.

S-100 Boards

DOUBLE-D - Jade
Double density disk controller with the inside track

IOD-1300K	*Kit & CP/M 2.2*	$395.00
IOD-1300A	*8" A & T & CP/M 2.2*	$469.00
IOD-1305A	*5¼" A & T & CP/M 2.2*	$469.00
IOD-1200B	*Bare board*	$55.00

DOUBLE DENSITY - Cal Comp Sys
5¼" or 8" disk controller with free CP/M 2.2

IOD-1400A	*A & T*	$374.95

THE BIG Z* - Jade
2 or 4 MHz switchable Z-80 CPU with serial I/O*

CPU-30201K	*Kit*	$145.00
CPU-30201A	*A & T*	$199.00
CPU-30200B	*Bare board*	$35.00

SBC-100 - SD Systems
2.5 MHz Z-80 CPU with serial & parallel I/O ports*

CPC-30100K	*Kit*	$269.95
CPC-30100A	*Jade A & T*	$339.95

SBC-200 - SD Systems
4 MHz Z-80 CPU with serial & parallel I/O ports*

CPC-30200K	*Kit*	$299.95
CPC-30200A	*Jade A & T*	$375.00

CB2 - S.S.M.
2 or 4 MHz switchable Z-80 CPU with RAM, ROM, & I/O*

CPU-30300K	*Kit*	$239.95
CPC-30300A	*A & T*	$299.95

2810 Z-80* CPU - Cal Comp Sys
2/4 MHz Z-80A CPU w/serial I/O port*

CPU-30400A	*A & T*	$275.00

ExpandoRAM I - SD Systems
2.5 MHz RAM board expandable from 16K to 64K

MEM-16130K	*16K kit*	$245.00
MEM-16130A	*16K Jade A & T*	$295.00
MEM-32131K	*32K kit*	$275.00
MEM-32131A	*32K Jade A & T*	$325.00
MEM-48132K	*48K kit*	$305.00
MEM-48132A	*48K Jade A & T*	$355.00
MEM-64133K	*64K kit*	$335.00
MEM-64133A	*64K Jade A & T*	$385.00

64K RAM BOARD $359.95

ExpandoRAM II - SD Systems
4 MHz RAM board expandable from 16K to 256K

MEM-16630A	*16K kit*	$249.95
MEM-16630A	*16K Jade A & T*	$299.95
MEM-32631K	*32K kit*	$289.95
MEM-32631A	*32K Jade A & T*	$339.95
MEM-48632K	*48K kit*	$324.95
MEM-48631A	*48K Jade A & T*	$374.95
MEM-64633K	*64K kit*	$359.95
MEM-64633A	*64K Jade A & T*	$409.95

32K STATIC RAM BOARD $299.95

16K STATIC RAM BOARD $169.95

32K STATIC RAM - Jade
2 or 4 MHz expandable static RAM board uses 2114L's

MEM-16151K	*16K 4 MHz kit*	$169.95
MEM-16151A	*16K 4 MHz A & T*	$224.95
MEM-32151K	*32K 4 MHz kit*	$299.95
MEM-32151A	*32K 4 MHz A & T*	$349.95

S.P.I.C. - Jade
Our new I/O card with 2 SIO's, 4 CTC's, and 1 PIO

IOI-1045K	*2 CTC's, 1 SIO, 1 PIO*	$199.00
IOI-1045A	*A & T*	$259.00
IOI-1046K	*4 CTC's, 2 SIO's, 1 PIO*	$259.00
IOI-1046A	*A & T*	$319.00
IOI-1045B	*Bare board w/ manual*	$59.95
IOI-1045D	*Manual only*	$20.00

16K STATIC RAM - Cal Comp Sys
2 or 4 MHz 16K static RAM - a real memory bargain

MEM-16160K	*16K 2 MHz kit*	$249.95
MEM-16160A	*16K 2 MHz A & T*	$279.00
MEM-16162K	*16K 4 MHz kit*	$279.95
MEM-16162A	*16K 4 MHz A & T*	$309.00
MEM-16160B	*Bare board*	$29.95

PB-1 - S.S.M.
2708, 2716 EPROM board with built-in programmer

MEM-99510K	*Kit*	$159.95
MEM-99510A	*A & T*	$239.95

PROM-100 - SD Systems
2708, 2716, 2732, 2758, & 2516 EPROM programmer

MEM-99520K	*Kit*	$175.00
MEM-99520A	*Jade A & T*	$225.00

I/O-4 - S.S.M.
2 serial I/O ports plus 2 parallel I/O ports

IOI-1010K	*Kit*	$179.95
IOI-1010A	*A & T*	$259.95
IOI-1010B	*Bare board*	$35.00

BIT STREAMER II - Vector Graphic
3 serial I/O ports plus 2 parallel I/O ports

IOI-1025A	*A & T*	$259.00

100K DAY CLOCK - Mtn Hardware
Crystal controlled S-100 clock with NiCad backup

IOK-1400A	*A & T*	$329.95

SB1 - S.S.M.
15 Hz to 25K Hz music synthesizer for S-100

IOS-1005K	*Kit*	$239.95
IOS-1005A	*A & T*	$299.95

TB-4 - Mullen
Extremely versatile extender board with logic probe

TSX-180K	*Kit*	$55.00
TSX-180A	*A & T*	$75.00

TERMINATOR & EXTENDER - C.C.S.
Can be used as both an S-100 extender and terminator

TSX-150K	*Kit*	$39.95

S-100 EXTENDER - Cal Comp Sys
Puts problem boards within easy reach

TSX-160A	*A & T*	$24.95

VERSAFLOPPY I - SD Systems
Versatile floppy disk controller for 8" or 5¼"

IOD-1150K	*Kit*	$219.95
IOD-1150A	*Jade A & T*	$269.95

VERSAFLOPPY II - SD Systems
New double density controller for both 8" & 5¼"

IOD-1160K	*Kit*	$309.95
IOD-1160A	*Jade A & T*	$369.95

S-100 PROTO BOARD - Jade
Universal design, plated thru holes, gold fingers

TSX-140B	*Bare board*	$24.95

2708/2716 EPROM BOARD - Jade
Holds up to 16 EPROMs, addressable on 1K banks

MEM-16230K	*Kit*	$69.95
MEM-16230A	*A & T, no PROMs*	$99.95
MEM-16230B	*Bare board*	$30.00

***Z-80, Z-80A, and the letter Z are recognized trademarks of Zilog, Inc.**

VDB-8024 - SD Systems
80 x 24 I/O mapped video board with keyboard I/O

IOV-1020K	*Kit*	$339.95
IOV-1020A	*Jade A & T*	$399.95

VB3 - S.S.M.
80 x 24 or 80 x 48 memory mapped with graphics

IOV-1095K	*Kit, 4 MHz*	$399.95
IOV-1095A	*A & T, 4 MHz*	$464.95
IOV-1096K	*80 x 48 upgrade, 4 MHz*	$89.00

VIDEO BOARD - Jade
64 x 16 assembled & tested S-100 video board

IOV-1050B	*Bare board*	$29.95
IOV-1050A	*A & T sale price*	$99.95

Single Board Computers

AIM-65 - Rockwell
6502 computer with printer, display, & keyboard

CPK-50165	*1K AIM*	$374.95
CPK-50465	*4K AIM*	$449.95
SFK-74600008E	*8K BASIC ROM*	$99.95
SFK-64600004E	*4K assembler ROM*	$84.95
PSX-030A	*Power supply*	$59.95
ENX-000002	*Enclosure*	$49.95

4K AIM, 8K BASIC, power supply, & enclosure

Special package price **$599.00**

Z-80* STARTER KIT - SD Systems
Z-80 computer with RAM, ROM, I/O, & keyboard*

CPS-30010K	*Kit*	$319.95
CPS-30010A	*Jade A & T*	$399.95

Video Monitors

VIDEO 100 - Leedex
12" B & W video monitor with 12 MHz bandwidth

VDM-801210		$139.95

VIDEO 100-80 - Leedex
81 x 24 version of Video 100 with metal cabinet

VDM-801230		$179.95

9" B & W MONITOR - A.P.F.
High quality, high resolution video monitor

VDM-750900	*9" monitor*	$149.95

13" COLOR MONITOR - Zenith
The hi res color you've been promising yourself

VDC-201301		$449.00

12" GREEN SCREEN - NEC
20 MHz, P31 phosphor video monitor with audio

VDM-651200	*12" monitor*	$249.95

Software

SDOS - SD Systems
DOS, CBASIC-2, Z-80 assembler/editor/linker*

SFX-55001000D	*Manual set*	$24.95
SFX-55001002M	*5¼" disks & man*	$199.95
SFX-55001006F	*8" disk & manual*	$199.95

CP/M 2.2 - Digital Research
Latest & most powerful release of CP/M

SFC-52506000D	*Manual set*	$24.95
SFC-52506000M	*5¼" disk & manual*	$149.95
SFC-52506000F	*8" disk & manual*	$149.95

***CP/M is a registered trademark of Digital Research Corp.**

All royalties paid by Jade Computer Products and California Computer Systems.

track and a free 2.2 to boot !!!

Accessories for Apple

16K MEMORY UPGRADE
Add 16K of RAM to your TRS-80, Apple, or Exidy
MEX-16100K *TRS-80 kit* **$39.95**
MEX-16101K *Apple kit* **$39.95**
MEX-16102K *Exidy kit* **$39.95**

PRINTER INTERFACE - Cal Comp
Centronics type I/O card w/ firmware
IOI-2041A *A & T* **$99.95**

8" DRIVES for APPLE
Controller, DOS, two 8" drives, cabinet, & cable
Special package price **$1475.00**

AIO - S.S.M.
Parallel & serial interface for your Apple
IOI-2050K *Kit* **$159.00**
IOI-2050A *A & T* **$199.00**

APPLE CLOCK - Cal Comp Sys
Real time clock w/battery back-up
IOK-2100A *A & T* **$125.00**

SUPERTALKER - Mtn Hardware
Speech recognition/synthesizer w/speaker & mike
IOS-2015A *A & T* **$275.00**

Z-80* CARD for APPLE
Z-80 CPU card with CP/M for your Apple*
CPX-30800A *A & T* **$298.00**

MICROMODEM - D.C. Hayes
Auto answer/dial modem card for Apple or S-100
IOM-2010A *Apple modem* **$349.95**
IOM-1100A *S-100 modem* **$375.00**

Printers

BASE 2 - Impact Printer
132 cps, bi-directional, tractor feed, & graphics
PRM-13100 ..... **$675.00**

DP-9501 - Anadex
9 x 11 dot matrix, 220 column, 200 cps, & graphics
PRM-10501 *Standard DP-9501* **$1495.00**
PRM-10511 *with graphics & 2K* .. **$1595.00**

ANACOM 150 - Special
150 cps, 9 x 9 matrix, tractor feed
PRM-11150 *Parallel interface* **$895.00**
PRM-11151 *Serial interface* **$895.00**

SPINWRITER - NEC
65 cps, bi-directional, letter quality with tractor
PRD-55510 *with 2K buffer* **$2695.00**

NOVATION CAT
300 baud, auto answer/originate acoustic modem
IOM-5200A *Special sale price* **$139.00**

D-CAT 300 baud, direct connect modem
IOM-5201A *Special sale price* **$189.00**

EPROM ERASERS
L.S. Engineering UV eraser for up to 48 EPROMs
XME-3200 *A & T* **$39.95**

Spectronics hi intensity industrial eraser
XME-3100 *Without timer* **$69.95**
XME-3101 *With timer* **$94.50**

TV-1 - Best Buy
The inexpensive alternative to video monitors
IOR-5040K *Kit* **$8.95**

Call for your free 1980 catalog

Disk Drives

JADE DISK PACKAGE
Double-D controller kit, two 8" double density drives CP/M 2.2, cabinet, power supply, & cables
Special package price **$1395.00**

DUAL 8" DRIVES - Jade
A pair of double density Shugarts in a cabinet
MSF-12800R *2 single sided* **$995.00**
MSF-125202 *2 double sided* **$1425.00**

8" DISK DRIVES
Highly reliable double density floppy disk drives
Shugart 801R single sided, double density
MSF-10801R *SA-801R* **$425.00**
Special Sale Price ..... ***2 for $800.00***
Qume Datatrak 8 double sided, double density
MSF-750080 *851R compatible* **$625.00**

DISKETTES - Jade
Bargain prices on magnificent magnetic media
5¼" single sided, single density, box of 10
MMD-5110103 *Soft sector* **$27.95**
MMD-5111003 *10 sector* **$27.95**
MMD-5111603 *16 sector* **$27.95**
5¼" double sided, double density, box of 10
MMD-5220103 *Soft sector* **$39.95**
8" single sided, single density, box of 10
MMD-8110103 *Soft sector* **$33.95**
8" single sided, double density, box of 10
MMD-8120103 *Soft sector* **$55.95**
8" double sided, double density, box of 10
MMD-8220103 *Soft sector* **$57.95**

DUAL DISK CABINET Jade
Metal enclosure for 2 801R's, power supply & fan
END-000021 *Bare cabinet* **$99.00**

Motherboards


ISO-BUS - Jade
Silent, simple, and on sale - a better motherboard
6 Slot (5¼" x 8⅝")
MBS-061B *Bare board* **$19.95**
MBS-061K *Kit* **$39.95**
MBS-061A *A & T* **$49.95**
12 Slot (9¾" x 8⅝")
MBS-121B *Bare board* **$29.95**
MBS-121K *Kit* **$69.95**
MBS-121A *A & T* **$89.95**
18 Slot (14½" x 8⅝")
MBS-181B *Bare board* **$49.95**
MBS-181K *Kit* **$99.95**
MBS-181A *A & T* **$139.95**

Mainframes

MAINFRAME - Cal Comp Sys
12 slot S-100 mainframe with 20 amp power supply
ENC-112105 *Kit* **$309.95**
ENC-112106 *A & T* **$349.95**

DISK MAINFRAME - NNC
Dual 8" drive cutouts with 8 slot motherboard
ENS-112320 *with 30 amp p.s.* **$699.95**

TRS-80 APPLE
16K MEMORY UPGRADE KIT
$39.95

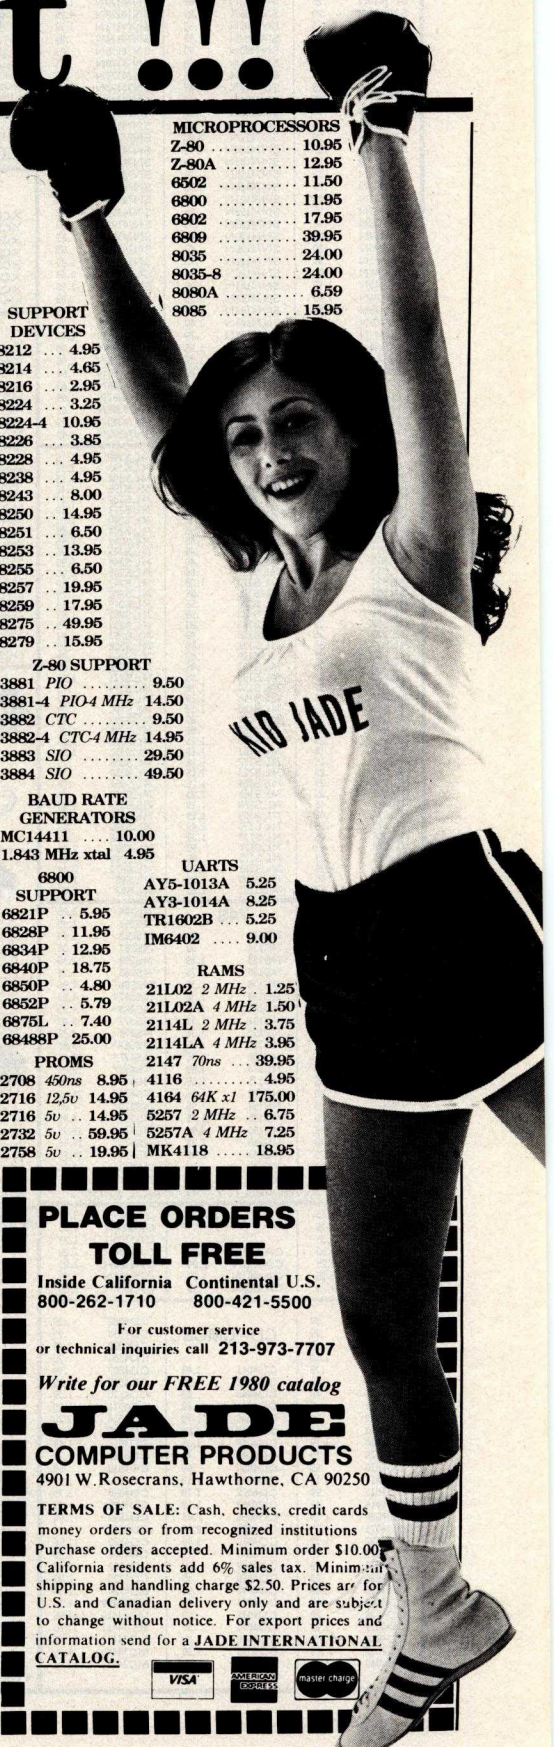

MICROPROCESSORS
Z-80 ..... 10.95
Z-80A 12.95
6502 ..... 11.50
6800 ..... 11.95
6802 ..... 17.95
6809 ..... 39.95
8035 ..... 24.00
8035-8 ..... 24.00
8080A 6.59
8085 ..... 15.95

SUPPORT DEVICES
8212 ... 4.95
8214 ... 4.65
8216 ... 2.95
8224 ... 3.25
8224-4 10.95
8226 ... 3.85
8228 ... 4.95
8238 ... 4.95
8243 ... 8.00
8250 .. 14.95
8251 ... 6.50
8253 .. 13.95
8255 ... 6.50
8257 .. 19.95
8259 .. 17.95
8275 .. 49.95
8279 .. 15.95

Z-80 SUPPORT
3881 *PIO* 9.50
3881-4 *PIO-4 MHz* 14.50
3882 *CTC* 9.50
3882-4 *CTC-4 MHz* 14.95
3883 *SIO* 29.50
3884 *SIO* 49.50

BAUD RATE GENERATORS
MC14411 .... 10.00
1.843 MHz xtal 4.95

6800 SUPPORT
6821P .. 5.95
6828P . 11.95
6834P . 12.95
6840P . 18.75
6850P .. 4.80
6852P .. 5.79
6875L .. 7.40
68488P 25.00

PROMS
2708 *450ns* 8.95
2716 *12,5v* 14.95
2716 *5v* .. 14.95
2732 *5v* .. 59.95
2758 *5v* .. 19.95

UARTS
AY5-1013A 5.25
AY3-1014A 8.25
TR1602B ... 5.25
IM6402 .... 9.00

RAMS
21L02 *2 MHz* . 1.25
21L02A *4 MHz* 1.50
2114L *2 MHz* . 3.75
2114LA *4 MHz* 3.95
2147 *70ns* ... 39.95
4116 ..... 4.95
4164 *64K x1* 175.00
5257 *2 MHz* .. 6.75
5257A *4 MHz* 7.25
MK4118 ..... 18.95

PLACE ORDERS TOLL FREE

Inside California 800-262-1710
Continental U.S. 800-421-5500

For customer service or technical inquiries call **213-973-7707**

Write for our FREE 1980 catalog

JADE COMPUTER PRODUCTS
4901 W. Rosecrans, Hawthorne, CA 90250

TERMS OF SALE: Cash, checks, credit cards money orders or from recognized institutions Purchase orders accepted. Minimum order $10.00 California residents add 6% sales tax. Minimum shipping and handling charge $2.50. Prices are for U.S. and Canadian delivery only and are subject to change without notice. For export prices and information send for a JADE INTERNATIONAL CATALOG.

VISA AMERICAN EXPRESS master charge

Circle 372 on inquiry card.

7400

SN7400N	.25	SN7472N	.29	SN74156N	.79
SN7401N	.20	SN7473N	.35	SN74157N	.69
SN7402N	.25	SN7474N	.35	SN74160N	.89
SN7403N	.25	SN7475N	.49	SN74161N	.89
SN7404N	.25	SN7476N	.35	SN74162N	.89
SN7405N	.29	SN7480N	.50	SN74163N	.89
SN7406N	.35	SN7482N	.99	SN74164N	.89
SN7407N	.35	SN7483N	.69	SN74165N	.89
SN7408N	.29	SN7485N	.89	SN74166N	1.25
SN7409N	.29	SN7486N	.35	SN74167N	2.79
SN7410N	.25	SN7489N	1.75	SN74170N	1.95
SN7411N	.29	SN7490N	.49	SN74172N	4.95
SN7412N	.35	SN7491N	.59	SN74173N	1.39
SN7413N	.40	SN7492N	.45	SN74174N	.99
SN7414N	.69	SN7493N	.45	SN74175N	.89
SN7416N	.29	SN74107N	.35	SN74176N	.79
SN7417N	.29	SN74109N	.39	SN74177N	.79
SN7420N	.25	SN74116N	1.95	SN74179N	1.49
SN7421N	.29	SN74121N	.39	SN74180N	.79
SN7422N	.45	SN74122N	.55	SN74181N	2.25
SN7423N	.29	SN74123N	.59	SN74182N	.79
SN7425N	.29	SN74125N	.49	SN74184N	2.49
SN7426N	.29	SN74126N	.49	SN74185N	2.49
SN7427N	.25	SN74132N	.75	SN74190N	1.25
SN7429N	.39	SN74136N	.75	SN74191N	1.25
SN7430N	.25	SN74141N	.99	SN74192N	.89
SN7432N	.29	SN74142N	3.25	SN74193N	.89
SN7437N	.25	SN74143N	3.49	SN74194N	.89
SN7438N	.40	SN74145N	.79	SN74195N	.69
SN7439N	.25	SN74147N	1.95	SN74196N	.89
SN7440N	.20	SN74148N	1.95	SN74197N	.89
SN7441N	.89	SN74150N	1.25	SN74198N	1.49
SN7442N	.59	SN74151N	.69	SN74199N	1.49
SN7443N	1.10	SN74152N	.69	SN74221N	1.25
SN7444N	1.10	SN74153N	.79	SN74251N	.99
SN7445N	.89	SN74154N	1.25	SN74276N	1.95
SN7446N	.79	SN74155N	.79	SN74279N	.79
SN7447N	.69	SN74156N	.79	SN74283N	1.49
SN7448N	.79	SN74157N	1.95	SN74284N	3.95
SN7450N	.29	SN74158N	1.29	SN74285N	3.95
SN7451N	.20	SN74160N	1.25	SN74365N	.69
SN7453N	.20	SN74161N	.69	SN74366N	.69
SN7454N	.20	SN74162N	.69	SN74367N	.69
SN7459A	.25	SN74163N	.79	SN74368N	.69
SN7460N	.20	SN74164N	1.25	SN74390N	1.49
SN7470N	.29	SN74165N	.79	SN74393N	1.49

74LS

74LS00	.29	74LS92	.75	74LS192	1.15
74LS01	.29	74LS93	.75	74LS193	1.15
74LS02	.29	74LS95	.99	74LS194	1.15
74LS03	.29	74LS96	1.15	74LS195	1.15
74LS04	.35	74LS107	.45	74LS197	1.19
74LS05	.35	74LS109	.45	74LS221	1.19
74LS08	.29	74LS112	.45	74LS240	1.95
74LS09	.35	74LS113	.49	74LS241	1.95
74LS10	.29	74LS114	.49	74LS242	1.95
74LS11	.75	74LS122	.89	74LS243	1.95
74LS12	.35	74LS123	1.25	74LS244	1.95
74LS13	.59	74LS125	.89	74LS245	2.95
74LS14	.99	74LS126	.55	74LS247	1.19
74LS15	.35	74LS132	.99	74LS248	1.19
74LS20	.29	74LS133	.89	74LS249	1.19
74LS21	.35	74LS136	.49	74LS251	1.49
74LS22	.35	74LS138	.89	74LS253	.99
74LS26	.35	74LS139	.89	74LS257	.89
74LS27	.35	74LS145	.89	74LS258	.99
74LS28	.35	74LS147	1.95	74LS260	.69
74LS30	.29	74LS151	.89	74LS266	.69
74LS32	.35	74LS153	.89	74LS273	1.95
74LS33	.59	74LS154	1.75	74LS279	.75
74LS37	.45	74LS155	1.19	74LS283	1.09
74LS38	.49	74LS156	1.19	74LS290	.99
74LS40	.35	74LS157	.89	74LS293	.99
74LS42	.89	74LS158	.99	74LS298	1.25
74LS47	.89	74LS160	1.15	74LS352	1.29
74LS48	1.15	74LS161	1.15	74LS353	1.29
74LS49	1.15	74LS162	1.15	74LS365	.75
74LS51	.29	74LS163	1.15	74LS366	.75
74LS54	.29	74LS164	1.25	74LS367	.75
74LS55	.29	74LS165	1.25	74LS368	.75
74LS73	.45	74LS168	1.19	74LS373	1.95
74LS74	.45	74LS169	1.19	74LS374	1.95
74LS75	.59	74LS170	2.49	74LS375	.89
74LS76	.45	74LS173	1.39	74LS386	.69
74LS78	.49	74LS174	.99	74LS393	2.49
74LS83	.89	74LS175	.99	74LS399	2.49
74LS85	1.25	74LS181	2.95	74LS670	2.49
74LS86	.45	74LS190	1.25	81LS95	1.95
74LS90	.59	74LS191	1.25	81LS97	1.95

74S

74S00	.50	74S133	.55	74S244	3.25
74S02	.50	74S134	.69	74S251	1.45
74S03	.50	74S135	1.19	74S253	1.45
74S04	.55	74S136	1.75	74S257	1.35
74S05	.55	74S138	1.35	74S258	1.35
74S08	.50	74S139	1.35	74S260	.79
74S09	.50	74S140	1.15	74S280	2.95
74S10	.50	74S151	1.35	74S287*	4.95
74S11	.50	74S153	1.35	74S288*	4.95
74S15	.50	74S154	1.59	74S373	3.49
74S20	.50	74S157	1.35	74S374	3.49
74S22	.50	74S158	1.35	74S387*	5.95
74S30	.55	74S174	1.59	74S472*	19.95
74S32	.55	74S175	1.59	74S473*	19.95
74S40	.55	74S188	4.95	74S474*	21.95
74S51	.50	74S194	1.95	74S475*	21.95
74S64	.50	74S195	1.95	74S570*	7.95
74S65	.50	74S196	3.95	74S571*	7.95
74S74	.79	74S240	2.95	74S572*	19.95
74S86	.79	74S241	2.95	74S573*	19.95
74S112	.79	74S242	3.25	74S574*	14.95
74S113	.79	74S243	3.25	74S940	3.15
74S114	.79			74S941	3.15

* LIMITED AVAILABILITY ON THESE PROMS


CA—LINEAR

CA3013H	2.15	CA3081N	2.00	CA3089N	3.75
CA3023H	3.25	CA3082N	2.00	CA3096N	3.95
CA3039H	1.35	CA3083N	1.60	CA3130H	1.39
CA3046N	1.30	CA3086N	.85	CA3140H	1.25
CA3059N	3.25			CA3160H	1.25
CA3060N	3.25			CA3401N	.59
CA3080H	1.25			CA3600N	3.50

CD—CMOS

CD4000	.39	CD4041	1.49	CD4082	.39
CD4001	.39	CD4042	.99	CD4093	.99
CD4002	.39	CD4043	.89	CD4098	2.49
CD4006	1.19	CD4044	.89	CD4506	.75
CD4007	.25	CD4046	1.79	CD4507	.99
CD4009	.49	CD4047	2.50	CD4508	3.95
CD4010	.49	CD4048	1.35	CD4510	1.39
CD4011	.39	CD4049	.49	CD4511	1.29
CD4012	.25	CD4050	.69	CD4514	3.95
CD4013	.49	CD4051	1.19	CD4515	2.95
CD4014	1.39	CD4052	1.19	CD4516	1.49
CD4015	1.19	CD4053	1.19	CD4518	1.79
CD4016	.59	CD4054	2.95	CD4519	.89
CD4017	1.19	CD4055	2.95	CD4520	1.29
CD4018	.99	CD4056	3.95	CD4526	1.79
CD4019	.49	CD4059	9.95	CD4528	1.79
CD4020	1.19	CD4060	1.49	CD4529	1.95
CD4021	1.39	CD4062	2.95	CD4543	2.79
CD4022	1.19	CD4066	.79	CD4562	11.95
CD4023	.29	CD4068	.39	CD4566	2.79
CD4024	.79	CD4069	.45	CD4583	2.49
CD4025	.23	CD4070	.55	CD4723	1.95
CD4026	2.95	CD4071	.49	CD4724	1.95
CD4027	.69	CD4072	.49	MC14409	14.95
CD4028	.89	CD4073	.39	MC14410	14.95
CD4029	1.49	CD4075	.39	MC14411	14.95
CD4030	.49	CD4076	1.39	MC14412	11.95
CD4035	.99	CD4081	.39	MC14419	4.95
CD4040	1.49			MC14433	13.95

JE608 PROGRAMMER
2708 EPROM PROGRAMMER



- 3 separate Display Registers: 8 LED's for Hex Key entries, 10 LED's (2 - 2*) for Address Register and 8 LED's for Data Memory Register. The Data Memory Register displays the content of the RAMs from the EPROM Chip.
- Development of microprocessor systems by means of a ribbon cable from the programmer panel test socket to the EPROM socket on the microprocessor board.
- Rapid checking verification of programmed data changes.
- User may move data from a master to RAM's or write into RAM's with keyboard entries.
- Allows manual stepping manipulation (up and down) at any address location.
- Stand-alone EPROM Programmer consisting of:
  - A 19-key Hexadecimal Keyboard assembly, Programmer Board assembly with 4 power supplies and a LED/Test Socket Panel Board assembly. The Test Socket is zero force insertion type. Power requirements: 115VAC, 60Hz, 6W.
- Compact desk-top enclosure: Color-coordinated designer's case with light tan panels and molded end pieces in mocha brown. Size: 3¼"H x 11"W x 8¾"D. Weight: 5 lbs.

The JE608 EPROM Programmer is a completely self-contained unit which is independent of computer control and requires no additional systems for its operations. The EPROM can be programmed from the Hexadecimal Keyboard or from a pre-programmed EPROM. The JE608 Programmer can emulate a programmed EPROM by the use of its internal RAM circuits. This will allow the user to test or pretest a program, for a system, prior to programming a chip. Any changes in the program can be entered directly into the memory circuits with the Hexadecimal Keyboard so that rewriting the entire program will not be necessary. The JE608 Programmer contains a Programmer/Board with 25 IC's and including power supplies of: -5V, +5V, +12V and +26V. The Hexadecimal Keyboard and LED/Test Socket Panel Board are separate assemblies within the system.

JE608K KIT **$399.95**
JE608A Assembled and tested **$499.95**

DISCRETE LEDS

XC556R	.200" red	5/$1	MV50	.085" red	6/$1	XC111R	.190" red	5/$1
XC556G	.200" green	4/$1	XC209R	.125" red	5/$1	XC111G	.190" green	4/$1
XC556Y	.200" yellow	4/$1	XC209G	.125" green	4/$1	XC111Y	.190" yellow	4/$1
XC556C	.200" clear	4/$1	XC209Y	.125" yellow	4/$1	XC111C	.190" clear	4/$1
XC22R	.200" red	5/$1	XC526R	.185" red	5/$1			
XC22G	.200" green	4/$1	XC526G	.185" green	4/$1	INFRA-RED LED		
XC22Y	.200" yellow	4/$1	XC526Y	.185" yellow	4/$1	¼"x ¼"x 1/16" flat		
MV10B	.170" red	4/$1	XC526C	.185" clear	4/$1	IRL — 5/$1		


DISPLAY LEDS

C.A. — Common Anode — C.C. — Common Cathode

Type	Polarity	Ht	Price	Type	Polarity	Ht	Price
MAN 1	C.A.—red	.270	2.95	DL741	C.A.—red	.600	1.25
MAN 2	5x7 D.M.—red	.300	4.95	DL746	C.A.—red ± 1	.630	1.49
MAN 3	C.C.—red	.125	.25	DL747	C.A.—red	.600	1.49
MAN 52	C.A.—green	.300	1.25	DL750	C.C.—red	.600	1.49
MAN 54	C.C.—green	.300	1.25	DL33B	C.C.—red	.110	.35
MAN 71	C.A.—red	.300	.75	FND70	C.C.	.250	.69
MAN 72	C.A.—red	.300	.75	FND358	C.C. ± 1	.357	.99
MAN 74	C.C.—red	.300	1.25	FND359	C.C.	.357	.75
MAN 82	C.A.—yellow	.300	.49	FND503	C.C. (FND500)	.500	.99
MAN 84	C.C.—yellow	.300	.99	FND507	C.A. (FND510)	.500	.99
MAN 3620	C.A.—orange	.300	.49	HDSP-3401	C.A.—red	.800	1.50
MAN 3630	C.A.—orange ± 1	.300	.99	HDSP-3403	C.C.—red	.800	1.50
MAN 3640	C.C.—orange	.300	.99	5082-7613	C.C., R.H.D.—red	.300	1.25
MAN 4610	C.A.—orange	.400	.99	5082-7620	C.A., L.H.D.—yel.	.300	1.25
MAN 6610	C.A.—orange—DD	.560	.99	5082-7623	C.C., R.H.D.—yel.	.300	1.25
MAN 6630	C.A.—orange ± 1	.560	.99	5082-7730	C.A., L.H.D.—red	.300	.99
MAN 6640	C.C.—orange—DD	.560	.99	5082-7731	C.A., R.H.D.—red	.300	1.25
MAN 6650	C.C.—orange ± 1	.560	.99	5082-7750	C.A., L.H.D.—red	.430	1.75
MAN 6660	C.A.—orange	.560	.99	5082-7751	C.A., R.H.D.—red	.430	1.25
MAN 6710	C.A.—red—DD	.560	.99	5082-7760	C.C., R.H.D.—red	.430	1.75
MAN 6750	C.C.—red ± 1	.560	.99	5082-7300	4x7 sgl. dig. RHD	.600	22.00
MAN 6780	C.C.—red	.560	.99	5082-7302	4x7 sgl. dig. LHD	.600	22.00
DL704	C.C.—red	.300	1.25	5082-7304	Overnge. char. (±1)	.600	19.95
DL707	C.A.—red	.300	1.25	LIT-1	Photo Xsistor Opto-Isol.		.69
DL728	C.C.—red	.500	1.49	MOC3010	Optically Isol. Triac Driver		1.25

RADIO CONTROL CIRCUITS

NEW!



Ideal for remote control systems which use pulse amplitude modulation (toy cars, boats, tanks, etc.) Features: five function control, adjustable steering angle, suitable for 27 and 47MHz bands and low power consumption.

KB-4428 TRANSMITTER **$4.25**
Abs. max. rating (TA@25°C). Supply volt.: Vcc 12VDC. Power Dissip.: PD: 300mW; Temp. range: Oper. 0-+50°C — Storage -30— +125° C. Rec. oper. volt.: 7-11V. Crystal or CR Oscillation circuits acceptable.

KB-4429 RECEIVER **$5.95**
Abs. max. rating (TA@25°C). Supply volt.: Vcc1: 11V. Vcc2: 7.5V. Power Dissip.: 600mW. Temp. range: Oper. 0 ± 50°C. Rec. oper. volt.: VOP1 7-11V — VOP2 3-6V.

LOW PROFILE (TIN) SOCKETS



	1-24	25-49	50-100
8 pin LP	.17	.16	.15
14 pin LP	.20	.19	.18
16 pin LP	.22	.21	.20
18 pin LP	.29	.28	.27
20 pin LP	.34	.32	.30
22 pin LP	.37	.36	.35
24 pin LP	.38	.37	.36
28 pin LP	.45	.44	.43
36 pin LP	.60	.59	.58
40 pin LP	.63	.62	.61

SOLDERTAIL (GOLD) STANDARD



	1-24	25-49	50-100
8 pin SG	.39	.35	.31
14 pin SG	.49	.45	.41
16 pin SG	.54	.49	.44
18 pin SG	.59	.53	.48
24 pin SG	.79	.75	.69
28 pin SG	1.10	1.00	.90
36 pin SG	1.65	1.40	1.26
40 pin SG	1.75	1.59	1.45

SOLDERTAIL STANDARD (TIN)



	1-24	25-49	50-100
14 pin ST	.27	.25	.24
16 pin ST	.30	.27	.25
18 pin ST	.35	.32	.30
24 pin ST	.49	.45	.42
28 pin ST	.99	.90	.81
36 pin ST	1.39	1.26	1.15
40 pin ST	1.59	1.45	1.30

WIRE WRAP SOCKETS (GOLD) LEVEL #3



	1-24	25-49	50-100
8 pin WW	.59	.54	.49
10 pin WW	.69	.63	.58
14 pin WW	.79	.73	.67
16 pin WW	.85	.77	.70
18 pin WW	.99	.90	.81
20 pin WW	1.19	1.08	.99
22 pin WW	1.49	1.35	1.23
24 pin WW	1.39	1.26	1.14
28 pin WW	1.69	1.53	1.38
36 pin WW	2.19	1.99	1.79
40 pin WW	2.29	2.09	1.89

1/4 WATT RESISTOR ASSORTMENTS – 5%

ASST. 1	5ea.	10 Ohm	12 Ohm	15 Ohm	18 Ohm	22 Ohm					50pcs.	$1.95
		27 Ohm	33 Ohm	39 Ohm	47 Ohm	56 Ohm						
ASST. 2	5ea.	68 Ohm	82 Ohm	100 Ohm	120 Ohm	150 Ohm					50pcs.	$1.95
		180 Ohm	220 Ohm	270 Ohm	330 Ohm	390 Ohm						
ASST. 3	5ea.	470 Ohm	560 Ohm	680 Ohm	820 Ohm	1K					50pcs.	$1.95
		1.2K	1.5K	1.8K	2.2K	2.7K						
ASST. 4	5ea.	3.3K	3.9K	4.7K	5.6K	6.8K					50pcs.	$1.95
		8.2K	10K	12K	15K	18K						
ASST. 5	5ea.	22K	27K	33K	39K	47K					50pcs.	$1.95
		56K	68K	82K	100K	120K						
ASST. 6	5ea.	150K	180K	220K	270K	330K					50pcs.	$1.95
		390K	470K	560K	680K	820K						
ASST. 7	5ea.	1M	1.2M	1.5M	1.8M	2.2M					50pcs.	$1.95
		2.7M	3.3M	3.9M	4.7M	5.6M						
ASST. 8R		Includes Resistor Assts. 1-7 (350 pcs.)										$10.95 ea.

$10.00 Min. Order — U.S. Funds Only
Calif. Residents Add 6% Sales Tax
Postage — Add 5% plus $1 Insurance (if desired)

Spec Sheets — 25¢
1981 Catalog Available — Send 41¢ stamp

NEW 1981 CATALOG

Jameco ELECTRONICS

MAIL ORDER ELECTRONICS — WORLDWIDE
1355 SHOREWAY ROAD, BELMONT, CA 94002
PRICES SUBJECT TO CHANGE
11/80

PHONE ORDERS WELCOME (415) 592-8097

INTERSIL

Part No.	Function	Price
7045IPI	CMOS Precision Timer	14.95
7045EV/Kit*	Stopwatch Chip, XTL	22.95
7106CPL	3½ Digit A/D (LCD Drive)	16.95
7106EV/Kit*	IC, Circuit Board, Display	34.95
7107CPL	3½ Digit A/D (LED Drive)	15.95
7107EV/Kit*	IC, Circuit Board, Display	28.95
7116CPL	3½ Digit A/D LCD Dis. HLD.	18.95
7117CPL	3½ Digit A/D LED Dis. HLD.	17.95
7201IDR	Low Battery Volt Indicator	2.25
7205IPG	CMOS LED Stopwatch/Timer	12.95
7205EV/Kit*	Stopwatch Chip, XTL	19.95
7206CJPE	Tone Generator	5.15
7206CEV/Kit*	Tone Generator Chip, XTL	9.95
7207AIPD	Oscillator Controller	6.50
7207AEV/Kit*	Freq. Counter Chip, XTL	11.10
7208IPI	Seven Decade Counter	17.95
7209IPA	Clock Generator	3.95
7215IPG	4 Func. CMOS Stopwatch CKT	13.95
7215EV/Kit*	4 Func. Stopwatch Chip, XTL	19.95
7216AIJI	8-Digit Univ. Counter C.A.	32.00
7216CIJI	8-Digit Freq. Counter C.A.	26.95
7216DIPI	8-Digit Freq. Counter C.C.	21.95
7217IJI	4-Digit LED Up/Down Counter	12.95
7218CIJI	8-Digit Univ. LED Drive	10.95
7224IPL	LCD 4½ Digit Up Counter DRI	11.25
7226AIJL	8-Digit Univ. Counter	31.95
7226AEV/Kit*	5 Function Counter Chip, XTL	74.95
7240IJE	CMOS Bin Prog. Timer/Counter	4.95
7242IJA	CMOS Divide-by-256 RC Timer	2.05
7260IJE	CMOS BCD Prog. Timer/Counter	6.00
7260IJE	CMOS BCD Prog. Timer/Counter	8.25
7555IPA	CMOS 555 Timer (8 pin)	1.45
7556IPD	CMOS 556 Timer (14 pin)	2.20
7611BCPA	CMOS Op Amp Comparator 5MV	2.25
7612BCPA	CMOS Op Amp Ext. Cmvr. 5MV	2.95
7621BCPA	CMOS Dual Op Amp Comp. 5MV	3.95
7631CCPE	CMOS Tri Op Amp Comp. 10MV	5.35
7641CCPD	CMOS Quad Op Amp Comp. 10MV	7.50
7642CCPD	CMOS Quad Op Amp Comp. 10MV	7.50
7660CPA	Voltage Converter	2.95
8069CCQ	50ppm Band—GAP Volt Ref. Diode	2.50
8211CPA	Volt Ref/Indicator	2.50
8212CPA	Volt Ref/Indicator	2.50

* INTERSIL'S EVALUATION KITS

74C

74C00	.39	74C106	.75	74C195	1.59
74C02	.39	74C107	1.89	74C221	1.95
74C04	.39	74C151	2.95	74C240	2.25
74C08	.39	74C154	3.95	74C244	2.25
74C10	.39	74C157	2.25	74C373	2.49
74C14	.75	74C160	1.69	74C374	2.59
74C20	.39	74C161	1.60	74C901	.89
74C30	.39	74C162	1.49	74C903	1.15
74C42	1.39	74C163	1.69	74C911	10.95
74C48	1.95	74C164	1.59	74C912	10.95
74C73	.79	74C173	1.39	74C915	1.69
74C74	.79	74C174	1.39	74C917	10.95
74C85	1.95	74C175	1.39	74C922	5.49
74C86	.99	74C192	1.69	74C923	5.75
74C89	5.95	74C193	1.69	74C925	7.50
74C90	1.29			74C926	7.50
74C93	1.29			80C95	.79
74C95	1.59			80C97	.79

LINEAR

LH0002CN	6.85	LM340T-5	1.25	NE570N	4.95
LM10CLH	4.50	LM340T-12	1.25	LM702H	.79
LM11CLH	4.75	LM340T-15	1.25	LM703CN	.89
LH0070-OH	6.05	LM341P-5	.75	LM709N	.29
TL071CP	.79	LM341P-12	.75	LM710N	.79
TL072CP	1.39	LM341P-15	.75	LM711N	.79
TL074CN	2.49	LM342P-5	.69	LM723N	.69
LH0082CD	35.80	LM342P-12	.75	LM733N	1.20
TL082CP	1.19	LM342P-15	.75	LM739N	1.19
TL084CN	2.19	LM342P-5	.69	LM741CN	.35
LH0094CD	36.80	LM342P-12	.69	MC1741SCG	3.00
LM300H	.99	LM342P-15	.69	LM747N	.79
LM301CN	.35	LM348N	1.25	LM748N	.59
LM302H	1.95	LM350K	5.75	LM1014N	2.75
LM304H	1.95	LF351N	.60	LM1310N	1.95
LM306H	.99	LF353N	1.00	LM1458CN	.59
LM307CN	.45	LF355N	1.10	LM1488N	1.25
LM308CN	1.00	LF356N	1.10	LM1489N	1.25
LM309H	1.95	LM358N	1.00	LM1496N	1.95
LM309K	1.25	LM359N	1.79	LM1556V	1.75
LM310CN	1.75	LM370N	4.49	LM1800N	2.95
LM311H	.90	LM373N	3.25	LM1877N-9	3.25
LM312H	2.49	LM377N	2.95	LM1889N	3.20
LM317MP	1.15	LM380N	1.25	LM1896N	1.75
LM317T	1.75	LM381N	1.95	LM2002T	1.49
LM317K	3.95	LM382N	1.79	LM2877P	2.05
LM318CN	1.95	LM384N	1.95	LM2878P	2.25
LM319N	1.95	LM386N-3	1.29	LM2896P-1	2.25
LM320K-5	1.35	LM387N	1.45	LM3189N	2.95
LM320K-12	1.35	LM389N	1.35	LM3900N	.69
LM320K-15	1.35	LM392N	.69	LM3905CN	1.25
LM320T-5	1.25	LF398N	4.00	LM3909N	1.15
LM320T-12	1.25	LM399H	5.00	LM3914N	3.95
LM320T-15	1.25	TL494CN	4.49	LM3915N	3.95
LM323K-5	5.95	TL496CP	1.75	LM3916N	3.95
LM324N	.99	NE510A	6.00	RC4136N	1.25
LM329DZ	.65	NE529A	4.95	RC4151NB	3.95
LM331N	3.95	NE531H	3.95	RC4194TK	5.95
LM334Z	1.30	NE536H	6.00	RC4195TK	5.95
LM335Z	1.40	NE540H	6.00	KB4428	4.25
LM336Z	1.75	NE544N	4.95	KB4429	5.95
LM337T	1.95	NE550A	1.30	LM4500A	3.25
LM337MP	1.15	NE555V	.39	ICL8038B	4.95
LM338K	6.95	LM556N	.99	LM13080N	1.29
LM339N	.99	NE564N	3.95	LM13600N	1.49
LM340K-5	1.35	LM565N	1.25	75138N	1.95
LM340K-12	1.35	LM566CN	1.95	75450N	.89
LM340K-15	1.35	LM567V	1.25	75451CN	.39

CAPACITOR CORNER

50 VOLT CERAMIC DISC CAPACITORS

Value	1-9	10-99	100+	Value	1-9	10-99	100+
10 pf	.08	.06	.05	.001μF	.08	.06	.05
22 pf	.08	.06	.05	.0047μF	.08	.06	.05
47 pf	.08	.06	.05	.01μF	.08	.06	.05
100 pf	.08	.06	.05	.022μF	.09	.07	.06
220 pf	.08	.06	.05	.047μF	.09	.07	.06
470 pf	.08	.06	.05	.1μF	.15	.12	.10

100 VOLT MYLAR FILM CAPACITORS

.001mf	.12	.10	.07	.022mf	.13	.11	.08
.0022mf	.12	.10	.07	.047mf	.21	.17	.13
.0047mf	.12	.10	.07	.1mf	.27	.23	.17
.01mf	.12	.10	.07	.22mf	.33	.27	.22


+20% DIPPED TANTALUMS (Solid) CAPACITORS

.1/35V	.39	.34	.29	1.5/35V	.41	.37	.29
.15/35V	.39	.34	.29	2.2/35V	.51	.46	.34
.22/35V	.39	.34	.29	3.3/25V	.53	.47	.37
.33/35V	.39	.34	.29	4.7/25V	.63	.56	.45
.47/35V	.39	.34	.29	6.8/25V	.79	.69	.55
.68/35V	.39	.34	.29	10/25V	1.25	.95	.95
1.0/35V	.39	.34	.29	22/6V	.79	.69	.55

MINI. ALUMINUM ELECTROLYTIC CAPACITORS

	Axial Lead			Radial Lead		
.47/50V	.16	.14	.10	.47/25V	.15	.13	.12
1.0/50V	.19	.16	.12	.47/50V	.16	.14	.13
3.3/50V	.17	.15	.11	1.0/16V	.15	.13	.12
4.7/25V	.18	.15	.11	1.0/25V	.16	.14	.13
10/25V	.18	.15	.11	1.0/50V	.17	.15	.14
10/50V	.19	.16	.12	4.7/16V	.15	.13	.12
22/25V	.19	.16	.12	4.7/25V	.16	.14	.13
22/50V	.24	.20	.18	4.7/50V	.17	.15	.14
47/25V	.25	.21	.19	10/16V	.15	.13	.12
47/50V	.29	.25	.23	10/25V	.16	.14	.13
100/25V	.28	.24	.22	10/50V	.17	.15	.14
100/50V	.41	.37	.34	47/50V	.25	.21	.19
220/

National Semiconductor Clock Modules



12VDC AUTOMOTIVE/ INSTRUMENT CLOCK

APPLICATIONS:
- In-dash autoclocks
- After-market auto/ RV clocks
- Aircraft-marine clks.
- 12VDC oper. instru.
- Portable/battery powered instrumnts.

Features: Bright 0.3" green display. Internal crystal time-base. ±0.5 sec./day accur. Auto. display brightness control logic. Display color filterable to blue, blue-green, green & yellow. Complete – just add switches and lens.

MA1003 Module $16.95

MA1023 .7" Low Cost Digital LED Clock Module	8.95
MA1026 .7" Dig. LED Alarm Clock/Thermometer	18.95
MA5036 .3" Low Cost Digital LED Clock/Timer	6.95
MA1002 .5" LED Display Dig. Clock & Xformer	9.95



National Semiconductor RAM SALE


MM5290J-2 (MK4116/UPD416) . . . $6.95 each
16K DYNAMIC RAM (150NS)
(8 EACH $49.95) (100 EACH $550.00/lot)

MM5298J-3A ..... $3.25 each
8K DYNAMIC RAM (LOW HALF OF MM5290J) 200NS
(8 EACH $23.95) (100 EACH $250.00/lot)

MM2114-3 ..... $5.95 each
4K STATIC RAM (300NS)
(8 EACH $43.95) (100 EACH $450.00/lot)

MM2114L-3 ..... $6.25 each
4K STATIC RAM (LOW POWER 300NS)
(8 EACH $44.95) (100 EACH $475.00/lot)


EPROM Erasing Lamp



- Erases 2708, 2716, 1702A, 5203Q, 5204Q, etc.
- Erases up to 4 chips within 20 minutes.
- Maintains constant exposure distance of one inch.
- Special conductive foam liner eliminates static build-up.
- Built-in safety lock to prevent UV exposure.
- Compact – only 7-5/8" x 2-7/8" x 2"
- Complete with holding tray for 4 chips.

UVS-11E $79.50

Jumbo 6-Digit Clock Kit



- Four .630"ht. and two .300"ht. common anode displays
- Uses MM5314 clock chip
- Switches for hours, minutes and hold functions
- Hours easily viewable to 30 feet
- Simulated walnut case
- 115VAC operation
- 12 or 24 hour operation
- Includes all components, case and wall transformer
- Size: 6¾" x 3-1/8" x 1¾"

JE747 ..... $29.95

6-Digit Clock Kit



- Bright .300 ht. comm. cathode display
- Uses MM5314 clock chip
- Switches for hours, minutes and hold modes
- Hrs. easily viewable to 20 ft.
- Simulated walnut case
- 115 VAC operation
- 12 or 24 hr. operation
- Incl. all components, case & wall transformer
- Size: 6¾" x 3-1/8" x 1¾"


JE701 ..... $19.95

Regulated Power Supply



Uses LM309K. Heat sink provided. PC board construction. Provides a solid 1 amp @ 5 volts. Can supply up to ±5V, ±9V and ±12V with JE205 Adapter. Includes components, hardware and instructions. Size: 3½" x 5" x 2"H

JE200 ..... $14.95



ADAPTER BOARD —Adapts to JE200— ±5V, ±9V and ±12V

DC/DC converter with +5V input. Toriodal hi-speed switching XMFR. Short circuit protection. PC board construction. Piggy-back to JE 200 board. Size: 3½" x 2" x 9/16"H

JE205 ..... $12.95

MICROPROCESSOR COMPONENTS

8080A/8080A SUPPORT DEVICES

INS8080A	CPU	6.50
DP8212	8-Bit Input/Output	3.25
DP8214	Priority Interrupt Control	5.95
DP8216	Bi-Directional Bus Driver	3.49
DP8224	Clock Generator/Driver	3.95
DP8226	Bus Driver	3.49
DP8228	System Controller/Bus Driver	4.95
DP8238	System Controller	5.95
INS8243	I/O Expander for 48 Series	9.95
INS8250	Asynchronous Comm. Element	16.95
DP8251	Prog. Comm. I/O (USART)	7.95
DP8253	Prog. Interval Timer	14.95
DP8255	Prog. Peripheral I/O (PPI)	9.95
DP8257	Prog. DMA Control	19.95
DP8259	Prog. Interrupt Control	14.95
DP8275	Prog. CRT Controller	49.95
DP8279	Prog. Keyboard/Display Interface	19.95
DP8300	Octal Bus Receiver	6.95
DP8303	System Timing Element	6.95
DP8304	8-Bit Bi-Directional Receiver	3.95
DP8307	8-Bit Bi-Directional Receiver	3.95
DP8308	8-Bit Bi-Directional Receiver	3.95

6800/6800 SUPPORT DEVICES

MC6800	MPU	14.95
MC6802CP	MPU with Clock and RAM	19.95
MC6810API	128x8 Static RAM	4.95
MC6821	Peripheral Inter. Adapt (MC6820)	7.49
MC6828	Priority Interrupt Controller	10.95
MC6830L8	1024x8-Bit ROM (MC68A30-8)	14.95
MC6850	Asynchronous Comm. Adapter	6.95
MC6852	Synchronous Serial Data Adapter	6.95
MC6860	0-600bps Digital MODEM	10.95
MC6862	2400bps Modulator	12.95
MC6880A	Quad 3-State Bus. Trans. (MC8T26)	2.25

MICROPROCESSOR CHIPS

Z80 (780C)	CPU (MK3880N)	13.95
Z80A (780-1)	CPU (MK3880N-4)	15.95
CDP1802	CPU	19.95
2650	MPU	16.95
IDM2901ADC	CPU—4-Bit Slice (Com. Temp. Grade)	19.95
MC6502	MPU w/Clock (65K Bytes Memory)	11.95
INS8035N-6	MPU—8-Bit (6MHz)	16.95
INS8039N-6	CPU—Sgl. Chip 8-Bit (128 bytes RAM)	19.95
INS8040N-6	CPU (256 Bytes RAM)	24.95
INS8070N	CPU—64 Bytes RAM	24.95
P8085	CPU	19.95
INS8900	CPU—16-Bit	29.95
TMS9900JL	MPU—16-Bit	49.95

SHIFT REGISTERS

MM500H	Dual 25-Bit Dynamic	.50
MM503H	Dual 50-Bit Dynamic	.50
MM506H	Dual 100-Bit Static	.50
MM510H	Dual 64-Bit Accumulator	.50
MM1402	256-Bit Dynamic	3.95
MM5013	1024-Bit Dynamic/Accumulator	1.95
MM5016H	500/512-Bit Dynamic	.89
MM5034N	Octal 80-Bit	9.95
MM5035N	Octal 80-Bit	9.95
2504V (1404A)	1024-Bit Dynamic	3.95
2518N	Hex 32-Bit Static	4.95
2522V	Dual 132-Bit Static	2.95
2524V	512-Bit Dynamic	.99
2525V	1024-Bit Dynamic	2.95
2527V	Dual 256-Bit Static	2.95
2528V	Dual 250-Bit Static	4.00
2529V	Dual 240-Bit Static	4.00
2532N	Quad 80-Bit Static	2.95
3341PC	Fifo (Dual 80)	6.95

DATA ACQUISITION

AF100-1CN	Universal Active Filter 2.5%	5.95
AF121-1CJ	Touch Tone Low Pass Filter	19.95
AF122-1CJ	Touch Tone Low Pass Filter	19.95
LM308AH	Super Gain Op Amp	1.00
LM334Z	Constant Current Source	1.30
LM335Z	Temperature Transducer	1.40
LF356N	JFET Input Op Amp	1.10
LF398N	Sample & Hold Amplifiers	3.95
LM399H	Temp. Comp. Prec. Ref. (.5ppm/C°)	4.95
ADC0804LCN	8-Bit A/D Converter (1 LSB)	4.95
DAC0806LCN	8-Bit D/A Converter (0.78% Lin.)	2.25

DATA ACQUISITION (CONTINUED)

ADC0809CCN	8-Bit A/D Converter (8-Ch. Multi.)	5.25
ADC0817CCN	8-Bit A/D Converter (16-Ch. Multi.)	10.95
DAC1000LCN	10-Bit D/A Conv. Micro. Comp. (0.05%)	13.95
DAC1008LCN	10-Bit D/A Conv. Micro. Comp. (0.20%)	8.95
DAC1020LCN	10-Bit D/A Converter (0.05% Lin.)	8.49
DAC1022LCN	10-Bit D/A Converter (0.20% Lin.)	5.95
DAC1222LCN	12-Bit D/A Converter (0.20% Lin.)	9.95
CD4051N	8-Channel Multiplexer	1.19
AY-5-1013	30K BAUD UART	5.95

RAM'S

1101	256x1 Static	1.49
1103	1024x1 Dynamic	.99
2101 (8101)	256x4 Static	3.95
2102	1024x1 Static	1.75
21L02	1024x1 Static	1.95
2111 (8111)	256x4 Static	3.95
2112	256x4 Static MOS	4.95
2114	1024x4 Static 450ns	5.95
2114L	1024x4 Static 450ns Low Power	6.95
2114-3	1024x4 Static 300ns	7.49
2114L-3	1024x4 Static 300ns Low Power	7.95
2117	16,384x1 Dynamic 550ns (housemarked)	4.95
MM2147J	4096x1 Fast 70ns	19.95
5101	256x4 Static	7.95
MM5261	1024x1 Dynamic Fully Decoded	.99
MM5262	2Kx1 Dynamic	.25
MM5280/2107	4096x1 Dynamic	4.95
MM5290-2(4116)	16K Dynamic 250ns (UPD416)	6.95
MM5298J-3A	8K Dyn. 200ns (lower ½ of MM5290J)	4.95
7489	16x4 Static	1.75
UPD414/MK4027	4K Dynamic 16-pin	4.95
TMS4044-45NL	4K Static	14.95
TMS4045	1024x4 Static	14.95

PROMS/EPROMS

1702A	2K UV Erasable PROM	5.95
2708	8K EPROM	9.95
TMS2716	16K EPROM (-5V, +5V, +12V)	19.95
2716 Intel(2516) TI	16K EPROM (Single +5V)	17.95
2732 Intel(2532) TI	32K EPROM	49.95
2758	8K EPROM (450ns) (Single +5V)	7.95
5203	2048 PROM	14.95
82S23(74S188)	32x8 PROM (Open Collector)	4.95
82S115	4096 Bipolar PROM	19.95
82S123(74S288)	32x8 Tri-State Bipolar PROM	4.95
82S185	8K PROM	29.95

ROM'S

2513(2140)	Character Generator (Upper Case)	9.95
2513(3021)	Character Generator (Lower Case)	9.95
2516N	Character Generator	10.95
MM5230N	2048-Bit Read Only Memory	1.95

NMOS READ ONLY MEMORIES

MCM66710P	128x9x7 ASCII Shifted w/Greek	13.50
MCM66740P	128x9x7 Math Symbol & Pictures	13.50
MCM66750P	128x9x7 Alpha. Control Char. Gen.	13.50

MICROPROCESSOR MANUALS

M-Z80	User Manual	7.50
M-CDP1802	User Manual	7.50
M-2650	User Manual	5.00


SPECIAL FUNCTION

DS0025CN	Dual MOS Clock Driver (SMZ)	3.50
DS0026CN	Dual MOS Clock Driver (SMZ)	1.95
INS1771N-1	Floppy Disc Controller	24.95
INS2651N	Communication Chip	19.95
MM58167N	Microprocessor Real Time Clock	8.95
MM58174N	Microprocessor Compatible Clock	11.95
CDP402N	Microcontroller with 64-Digit RAM and Direct LED Drive	6.95
COP402MN	Microcontroller with 64-Digit RAM & Direct LED Drive w/N Buss Int.	7.49
COP470N	32-Seg. VAC Fluor. Driver (20-pin pkg.)	3.25

TELEPHONE/KEYBOARD CHIPS


AY-5-9100	Push Button Telephone Dialer	14.95
AY-5-9200	Repertory Dialer	14.95
AY-5-9500	CMOS Clock Generator	4.95
AY-5-2376	Keyboard Encoder (88 keys)	11.95
HD0165-5	Keyboard Encoder (16 keys)	7.95
74C922	Keyboard Encoder (16 keys)	5.49
74C923	Keyboard Encoder (20 keys)	5.75
MM53190N	Push Button Pulse Dialer	7.95
MM74994N	96/144-Key Serial Keyboard Encoder	8.95

DESIGNERS' SERIES
Blank Desk-Top Electronic Enclosures



- High strength epoxy molded end pieces in mocha brown finish.
- Sliding rear/bottom panel for service and component accessibility.
- Top/bottom panels .080 thk alum. Alodine type 1200 finish (gold tint color) for best paint adhesion after modification.
- Vented top and bottom panels for cooling efficiency.
- Rigid construction provides unlimited applications.

CONSTRUCTION:
The "DTE" Blank Desk Top Electronic Enclosures are designed to blend and complement today's modern computer equipment and can be used in both industrial and home. The end pieces are precision molded with an internal slot (all around) to accept both top and bottom panels. The panels are then fastened to ¼" thick tabs inside the end pieces to provide maximum rigidity to the enclosure. For ease of equipment servicing, the rear/bottom panel slides back on slotted tracks while the rest of the enclosure remains intact. Different panel widths may be used while maintaining a common profile outline. The molded end pieces can also be painted to match any panel color scheme.



Enclosure Model No.	Panel Width	PRICE
DTE-8	8.00"	$29.95
DTE-11	10.65"	$32.95
DTE-14	14.00"	$34.95

$10.00 Min. Order – U.S. Funds Only **Spec Sheets – 25¢**
Calif. Residents Add 6% Sales Tax **1981 Catalog Available – Send 41¢ stamp**
Postage – Add 5% plus $1 Insurance (if desired)

NEW 1981 CATALOG


Jameco ELECTRONICS

PHONE ORDERS WELCOME (415) 592-8097

MAIL ORDER ELECTRONICS – WORLDWIDE
1355 SHOREWAY ROAD, BELMONT, CA 94002
PRICES SUBJECT TO CHANGE

11/80

COMPUTER CUBE T.M.



NEW!

COMPUTER CRT MONITOR & ACCESSORY CASE
- One piece heavy duty molded construction
- Painted to match Apple II & III (Lt. beige, textured finish)
- Smoke colored acrylic front cover (removable)
- Built-in shelf holds CRT and allows room for 2 Apple disk drives below shelf
- Three 2½" holes provided in bottom of case for addition of fan if needed.
- Fan hole positioned above Apple motherboard location.
- Hookup cables can be run through other 2 holes.
- Case accommodates most B&W and Color uncased CRT monitors made by Motorola, Ball Bros., Zenith, Sanyo, Panasonic, Hitachi, etc. or any monitor that will fit into 10-3/8"H x 14½"W x 13¾"D space.
- Size: 15" x 15" x 15" O.D., 14½"H x 14½"W x 13¾" I.D.
- Weight: approximately 12 lbs.
- CRT monitor fan and disk drives not included.


CUBE-1 ..... $99.95

TRS-80 16K Conversion Kit

Expand your 4K TRS-80 System to 16K.
Kit comes complete with:
- **8 each MM5290-2 (UPD416) (16K Dynamic Rams) (250NS or less)**
- **Documentation for conversion**

TRS-16K $49.95

JE610 ASCII Encoded Keyboard Kit



The JE610 ASCII Keyboard Kit can be interfaced into most any computer system. The kit comes complete with an industrial grade keyboard switch assembly (62-keys), IC's, sockets, connector, electronic components and a double-sided printed wiring board. The keyboard assembly requires +5V @ 150mA and –12V @ 10 mA for operation. Features: 60 keys generate the 126 characters, upper and lower case ASCII set. Fully buffered. Two user-define keys provided for custom applications. Caps lock for upper-case-only alpha characters. Utilizes a 2376 (40-pin) encoder read-only memory chip. Outputs directly compatible with TTL/DTL or MOS logic arrays. Easy interfacing with a 16-pin dip or 18-pin edge connector.

JE610 (Case not included) $79.95
K62 (Keyboard only) $34.95

Desk-Top Enclosure for JE610 ASCII Encoded Keyboard Kit


Compact desk-top enclosure: Color-coordinated designer's case with light tan aluminum panels and molded end pieces in mocha brown. Includes mounting hardware. Size: 3½"H x 14½"W x 8¾"D.

DTE-AK $49.95

SPECIAL: **JE610/DTE-AK PURCHASED TOGETHER (Value $129.90) $124.95**

JE600 Hexadecimal Encoder Kit

FULL 8-BIT LATCHED OUTPUT 19-KEY KEYBOARD



The JE600 Encoder Keyboard Kit provides two separate hexadecimal digits produced from sequential key entries to allow direct programming for 8-bit microprocessor or 8-bit memory circuits. Three additional keys are provided for user operations with one having a bistable output available. The outputs are latched and monitored with 9 LED readouts. Also included is a key entry strobe. Features: Full 8-bit latched output for microprocessor use. Three user-define keys with one being bistable operation. Debounce circuit provided for all 19 keys. 9 LED readouts to verify entries. Easy interfacing with standard 16-pin IC connector. Only +5VDC required for operation.

JE600 (Case not included) $59.95
K19 (Keyboard only) $14.95

Desk-Top Enclosure for JE600 Hexadecimal Keyboard Kit

Compact desk-top exclosure: Color-coordinated designer's case with light tan aluminum panels and molded end pieces in mocha brown. Includes mounting hardware. Size: 3½"H x 8¼"W x 8¾"D.

DTE-HK $44.95

SPECIAL: **JE600/DTE-HK PURCHASED TOGETHER (Value $104.90) $99.95**

Circle 373 on inquiry card.

New Summer 1980
SEND FOR OUR FREE CATALOG



CompuMart lets you put 'em on trial

CompuMart has been selling computers by mail since 1971. Our thousands of satisfied customers rely on CompuMart for services not generally available from the others. Namely:

- Product Selection/Each product advertised by CompuMart has been evaluated by our in-house staff for best price, performance, and supplier reliability
- Return Privilege/After receipt of our products, you are protected by CompuMart's exclusive, 10-day return privilege- good for all products except software.
- Support/Our Customer Service Dept. and expert technicians are always there to assist you by phone or at CompuMart's outlets. Our knowledgeable phone sales force can provide you with detailed information and complete product specifications.
- Phone Ordering/For added convenience, CompuMart maintains a toll-free ordering number. 1-800-343-5504.
- Phones open M T W Th F 8:30 a.m. - 7:00 p.m. Sat. 11:00 a.m. - 4:00 p.m.

with 10 day free return

Terminals

We've got the following Lear Siegler Terminals In Stock at prices too low to print—**Call** for quotes.

ADM-3A Industries favorite dumb terminal for some very smart reasons.

ADM-3A.+ New from Lear Siegler. CALL!

ADM-31. The terminal that's too smart to be considered dumb.

ADM-42. Available with keyboard semi-intelligent terminal offering tremendous user flexibility. The optional configurations are amazing.

Call for details.



HAZELTINE TERMINALS AT SPECTACULAR SAVINGS!

Hazeltine 1410.	List $850	**CompuMart $749**
Hazeltine 1420.	List $995	**CompuMart $895**
Hazeltine 1500.	List $1095	**CompuMart $995**
Hazeltine 1510.	List $1395	**CompuMart $1325**
Hazeltine 1520.	List $1585	**CompuMart $1485**
Hazeltine 1552.	List $1395	**CompuMart $1295**

Call CompuMart for complete specs and quantity discounts.

Calculators

A CALCULATOR, A SYSTEM, A WHOLE NEW STANDARD.

HEWLETT-PACKARD'S HP-41C

HP-41C Calculator **$288.00**

The System

Memory Modules. For storing programs or up to 2,000 lines of program memory **$45.00**

"Extra Smart" Card Reader. Records programs and data back onto blank mag-cards **$199.00**

The Printer. Upper and Lower case, High resolution plotting, Portable Thermal operation **$355.00**

Application Modules ..... **$45.00 EACH**

Standard pac: Statistics, Math, Financial & Surveying



1/2 off Financial Decisions PAC with purchase of HP-41

NOVATION CAT™

ACCOUSTIC MODEM

- Answer Originate
- Bell 108
- 300 Baud
- Low Profile Design

Looks good, works great! **$169.00**



Texas Instruments TI-99/4 Home Computer


Save $300 on this 16-Bit computer with monitor

TI-99/4 w/Monitor **$1250**

TI-99/4 w/o Monitor **$ 950**

Printers

The Paper Tiger Printer From Integral Data



Uses standard ⅝ inch roll paper and ribbon
40 characters per line
Speed: 40 characters per second
UL approved

High resolution dot matrix impact printer

IDS Paper Tiger Printer **$995**

IDS Graphics Paper Tiger Printer **$1,094**

FREE Cable with your Paper Tiger.

NEW! From Integral Data. The IDS 460.

We saw this new desktop printer at the NCC 80 and when we saw its features: Correspondence quality printing, High-resolution graphics capability, programmable print control functions, and automatic text justification—we knew that we had to offer this printer to our cost/features conscious customers $1,295

The Omni 810 Printer from Texas Instruments

TI Omni 820 Receive-Only (RO) Package. Includes machine-mounted paper tray and cable. A compressed print option and device forms control are standard features **$2,155**

TI Omni 820 Keyboard Send Receive (KSR) Package Comes with full ASCII Keyboard with numeric Key- pad and an EIA cable with autospeed select. **$2,395**

CENTRONICS PRINTERS

New! The incredible Model 737- Correspondence and Draft Quality Printing for Under $1,000. This is the first printer in its class to offer print quality suitable for text processing, plus the performance and application flexibility required for data processing.

737-1 (Parallel Interface)— **$899**


737-3 (Serial Interface) **$1,045**

Tractor Feed Printer- Centronics' Most Popular Model. Perfect for the needs of a small business sytesm. Recommended by Apple and Radio Shack. **$1,079**

FREE Cable with purchase of any Centronics printer.

NEC The First Name in Letter Quality Printers.

CompuMart offers beautiful print quality with NEC Spinwriter terminals. The Spinwriters, both KSR and RO versions, give unsurpassed hard copy output. CompuMart offers a complete range of NEC Spin- writers—Call our expert salesforce



Compumart will throw in a **FREE** fabric ribbon and Currier 72 element when you buy a NEC from us.


Monitors

NEW FROM SANYO— Four Great Monitors at Low CompuMart Prices.

Sanyo's new line of CRT data display monitors are specifically designed for the display of alpha-numeric or graphic data.

9″ Sanyo Monitor	**$179**
12″ Sanyo Monitor	**$289**
12″ Sanyo Monitor with green screen	**$299**
13″ Sanyo Color Display Monitor	**$495**

Free 6' Cable with purchase of any Sanyo




EXCLUSIVE from CompuMart!
Special Offer. Zenith Color Video Monitor for $379!

The perfect monitor for Apple, Atari and Texas Instruments owners.

COMPUMART NOW OFFERS THE ENTIRE DEC LSI-11 PRODUCT LINE - CALL FOR PRICES & DELIVERY.

Circle 374 on inquiry card.

Computers

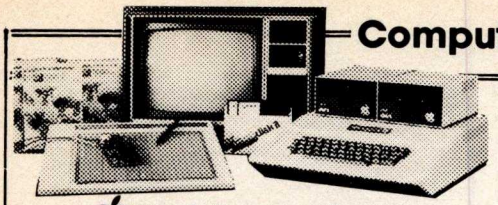

apple computer

We carry the most complete inventory of Apple computers, peripherals, and software. CALL!

Our Christmas Apple Special: Save over $250 on our most popular Apple System. System includes a 48K Apple II, Apple Disk & Controller, and a Sup R Mod RF Modulator.

List: $2,020

Compumart Sale Price: $1,769

New from Apple for the Apple II:

DOS 3-3 Convert disks to 16 sector format for 23% more storage and faster access	$60
Apple Plot. The perfect graphic complement for Visicalc.	$70
Dow Jones News & Quotes	$95
Adventure (Uses 48K)	$35
DOS Tool Kit	$75
Apple Fortran	$200
Silentype Printer w/Xface	$595
Visicalc	$149
Tax Planner	$120

From Symtech & Info Unlimited

Super Sound Generator (mono) $159 (stereo) $259

Light Pen	$249
X-10 Controller (plugs into paddle port)	$49
Apple Sync Controller	$49

From **Personal Software**

Visicalc	$149
Desk top plan	$99

New from **Videx!** — Video Term
80 Col. x 24 line
7 x 9 matrix, plug in compatible board for the Apple II. Price **$325** without graphics EPROM. With graphics EPROM **$350.**

New from **MUSE**


The Voice	$39.95
Super Text	$99.00
Address Book	$49.95

Mountain Hardware — Expansion accessories for your Apple

Introl/X-10 System	$289
Super Talker	$299
The Music System	$545
ROM plus board w/keyboard filter	$199
Clock Calendar	$280
16 Channel A to D Converter	$350
Apple Expansion Chassis	$650
ROM Writer	$175

Miscellaneous Apple II Accessories:

Easy Writer (80 col. need Videx)	$249
Easy Mover	$ 49
Easy Mailer	$ 69
Dysan Diskettes	ea. $ 5
S.S.M. Serial & Parallel Apple Interface	$225
ABT's Numeric Key Pad	$110



Preview of the Apple III

THANKSGIVING SPECIAL



Buy **$1,000** worth of merchandise from this ad, including at our special sale prices and deals, and we'll ship you a Texas Instrument's Speak & Spell™ with your order. This is TI's famous talking and learning aid with the electronic voice and brain. It's an incredible electronic learning aid for children aged 7 and up. A $69.95 Value Yours **FREE** with **$1,000** purchase.

SUPER SALE PRICED TO MOVE!

We want to move our inventory of Zenith Z-89 and Exidy Computers. To do it, we've priced them so low you'll have to call us for prices. If you want either of these two great computers, call us now while supplies last for the best prices you'll find anywhere. Good selection of Zenith and Exidy peripherals as well.

COMMODORE

Buy direct from the biggest — Compumart has delivered more Commodore computers in the U.S. than any other dealer. We were Commodore's first dealer and carry everything Commodore manufactures. In stock for immediate delivery! Call us now for low prices and special deals.

NEW FOR PET:

Visicalc (Need 32K and a disk drive)	$199

Word Pro 1, **$29.95** • Word Pro 2, **$99.95** •
Word Pro 3, **$199.95** • Word Pro 4, **$299.95** •

ROCKWELL AIM 65

The single board development system that's perfect in the classroom or lab.

Our AIM System includes: 4K AIM with BASIC interpretor assembler, Power Supply, Cassette recorder & Enclosure	$799.
4K AIM — 65	$499
PL65 High Level Language	$125
Paper for the AIM (roll)	$ 2.50
Rockwell's 4-slot Motherboard (SALE)	$175

CompuMart's Microflex 65 System for your AIM Includes: Adapter Buffer Module w/ 4-slot module stack, 8K RAM module, 16K PROM/ROM module, Asynchronous communications Interface, & Power Supply **$1,299**

Call or write for our complete Microflex 65 brochure



CompuMart STOCKS THE COMPLETE LINE OF MATROX PRODUCTS. CALL FOR SPECS.

Introducing the HP-85
$3,250



Hewlett-Packard's Personal Computer for Industry. This extremely portable computer features extended BASIC to solve your problems quickly and efficiently along with an advanced graphics system to enhance communication.

NEW from Hewlett-Packard
HP 82900-Series Flexible Disk Drives for the HP-85

These 4 new Flexible Disk Drives provide fast on-line storage using flexible disks

- *HP 82901M. Supplies approx. 540K bytes of on-line storage. **$2,500**
- *HP 82902M. Approx. 270K bytes of on-line storage. **$1,500**
- *HP 82901S. Supplies an additional 540K bytes when connected to an HP 82901M or an HP 82902M. **$2,200**
- *HP 829025. Supplies an additional 270K bytes when connected to an HP 82901M or an HP 82902M. **$1,300**

The Hewlett-Packard 7225A. High Quality/Low Cost Graphics Plotter. **$2,050**

Call our expert sales force for complete product specifications.

COMPUMART'S EXCLUSIVE ATARI SPECIALS. (Pick one)

3 Ways to save when you buy the Atari 800 from us.

1) **Free** 8K of memory with purchase. (So your Atari will come to you with 24K.)
2) **Free** 410 program recorder with purchase ($89.95 value).
3) $100 off Atari Disk Drive purchase.

ATARI 800 Personal Computer System —
Comes with 800 Operators Manual, 16K RAM Memory module, 10 K ROM Operating System, power supply, TV Switch Box. **$1080.00**

PERIPHERALS

Atari 410 Program Recorder (FREE w/purchase of Atari 800)	$ 89.95
Atari 810 Disk Drive ($100 off with purchase)	699.95
New Dual Disk double density	1499.95
825 Printer (Centronics 737)	995.00
RS232 Interface w/Cable	249.95
NEW! Light Pens	74.95



ATARI

Call for New Software

IMPORTANT ORDERING INFORMATION All orders must include 4% shipping and handling. Mass. residents add 5% sales tax, Michigan residents 4% for sales tax.

TO ORDER CALL: 800-343-5504
In Mass. call 1-617-491-2700

Phones open from 8:30 a.m. to 7:00 p.m., Mon.-Fri.; 11:00 a.m. - 4:00 p.m. Sat. P.O.'s accepted from Dun & Bradstreet rated companies - shipment contingent upon receipt of signed purchase order. Sale prices valid for month of magazine date only - all prices subject to change without notice. Our Ann Arbor retail store is open 11:00 a.m. to 7:00 p.m. Tues.-Fri., 10:00 a.m. to 5:00 p.m. Saturdays. Stop by and visit.

Circle 374 on inquiry card.

COMPUMART

270 THIRD ST., P.O. BOX 568, DEPT. 111, CAMBRIDGE, MA. 02139

master charge VISA

Member Computer Dealers Assoc.

We've had a reputation for dependability since 1971

LETTER QUALITY UNDER $2200



C. Itoh's Starwriter Daisy Wheel Printer is designed to fill a distinct gap in the peripheral market place. A speed of 25 cps and its low price make it the ideal choice for today's system designer interested in achieving superior price/performance ratios.

Incorporating the latest LSI technology, the STARWRITER is built by one of the world's most respected peripheral manufacturers. The printer is furnished complete and ready to use, requiring no changes in hardware or software. STARWRITER offers the industry standard parallel interface, as well as the RS-232 interface with voltage or current mode capacity. Total plug compatibility and a wide variety of interface matching capabilities help lower system integration costs and the 25 cps model is also easily upgraded to a 45 cps printer.

Using a 96 character wheel, the STARWRITER produces letter quality printing on 3 sharp copies with up to 163 columns. STARWRITER offers the highest degree of horizontal and vertical positioning, resulting in the most precise character placement in the industry. The easy-to-change character wheel also makes our printer a perfect choice for international applications. Compatible with sheet feeders, STARWRITER accommodates paper widths to 381 mm (15") and uses industry standard ribbon cartridges.

Along with a self-test capability and a programmable VFU (Vertical Format Unit), STARWRITER furnishes the operator with all desirable status functions, commands and program selectable switches. Panel lamps indicate the current Paper, Select and Power status.

The easy plug-in compatibility of STARWRITER and its outstanding print performance continue C. Itoh's tradition of providing reliable peripheral equipment to systems users the world over.

STARWRITER is backed by a one-year warranty (three months on parts and labor, 9 succeeding months on parts) and is supported by a strong, fully trained and technically proficient service organization.

A compete W/P package to add to your computer system now available. VR Data has integrated the C. Itoh Daisy Wheel Printer and the Magic Wand Word-Processing Program into a high-powered inexpensive word processing package. As an introductory offer we have the entire package for $2295.00* – a $200.00 savings over the combined list price.

* Add $75.00 for RS232 interface.

Printer specs:

- DIABLO® Wheels & Supplies
- Letter Quality
- 25 CPS – Rapid Seeking – Bi-Directional
- 45 CPS Optional
- Parallel Interface, Serial Optional
- Tractors Available

Priced Separately:

C. Itoh Starwriter	$2195.00
options:	
45 CPS	600.00
RS232 interface	75.00
Tractors	250.00

VR Data

777 HENDERSON BLVD.
FOLCROFT, PA 19032


WE SERVICE MANY BRANDS OF COMPUTER EQUIPMENT.
CALL FOR CONSULATION AND ESTIMATE.
DEALER INQUIRES INVITED • BIDS ACCEPTED • ABOVE PRICES ARE CASH DISCOUNTED, CALL FOR OTHER TERMS.

ORDER NOW • TOLL FREE 1 (800) 345-8102 • IN PENNSYLVANIA (215) 461-5300

Circle 375 on inquiry card.

VR DATA'S DISK DRIVE HEADQUARTERS

●SALE●
TRS-80
Disk & Other
Mysteries
$19.95
reg. $22.95

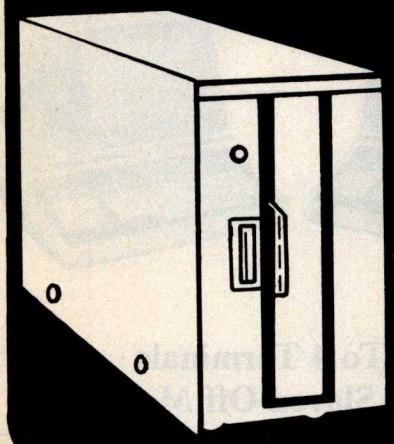

77 TRACK DRIVES
TRS-80 Model I compatible

$545
NEW LOW PRICE

40 TRACK DRIVES
TRS-80 Model I compatible


$340
NEW LOW PRICE

● ORDER NOW TOLL FREE 1 (800) 345-8102 ● IN PENNSYLVANIA (215) 461-5300 ●

HARD DISK
for TRS-80 Model II
$5995
10 meg. 5 fixed 5 removable

●SALE●
DISK HEAD CLEANERS
5-1/4" $12.95
reg. $14.95
8" 3M CLEANER
$24.95 reg. $30.00

SUPERBRAIN™
BY INTERTEC
64K $2995.00
complete with
5-1/4" disk drives ● in stock



TRS-80™
64K MODEL II
$3495.00
NEW LOW PRICE

Model II Drives	
1 Drive Single Enclosure	$ 899.00
1 Drive Multiple Enclosure	1069.50
Additional Drives for Mult. Enc.	540.00

● VR DATA Coupon ●
$5 Off!
B
ANY ITEM OVER $50.00
OFFER EXPIRES 12-1-80 ● ONE COUPON PER ITEM

SOFTWARE	MOD. I	MOD. II
Medical/Dental Patient Accounting		$1500
Word Processing (Magic Wand)		300
General Ledger	$149.95	249
Payroll	99.95	199
Data Base	149.95	299
	Tape	Disk
Upper/Lower Case Modification	$19.95	$24.95
Comprehensive Diagnostics	34.95	34.95
CP/M	$175.00	
New DOS + 40 TK	100.00	
New DOS/80	145.00	

Software Documentation Available ● CALL FOR PRICES

4K L II TRS-80		575.70
16K L II		789.60
RS-232		92.10
OK Expansion Interface		278.10
16K Expansion Interface		376.10
32K Expansion Interface		474.10
Telephone Modem		179.95
Emulator CRT by Intertec		895.00
CRT Stands	from	139.00
Anti-static Mats		110.00

● VR DATA Coupon ●
$10 Off!
B
ANY ITEM OVER $150.00
OFFER EXPIRES 12-1-80 ● ONE COUPON PER ITEM

● VISIT OUR NEW WAREHOUSE SHOWROOM AND REPAIR CENTER ●

VR Data
777 HENDERSON BLVD.
FOLCROFT, PA 19032

WE SERVICE MANY BRANDS OF COMPUTER EQUIPMENT.
CALL FOR CONSULATION AND ESTIMATE.
DEALER INQUIRES INVITED ● BIDS ACCEPTED ● ABOVE PRICES ARE CASH DISCOUNTED, CALL FOR OTHER TERMS.
ORDER NOW ● TOLL FREE 1 (800) 345-8102 ● IN PENNSYLVANIA (215) 461-5300

Circle 375 on inquiry card.

DP/NET: Redefined

INDIVIDUAL/NET

WORD PROCESSOR




S-100, 7 Slot, 360K Double Density


DUAL/NET

SMALL BUSINESS APPLICATIONS



Up To 4 Terminals
Can Be Slaved Off Master

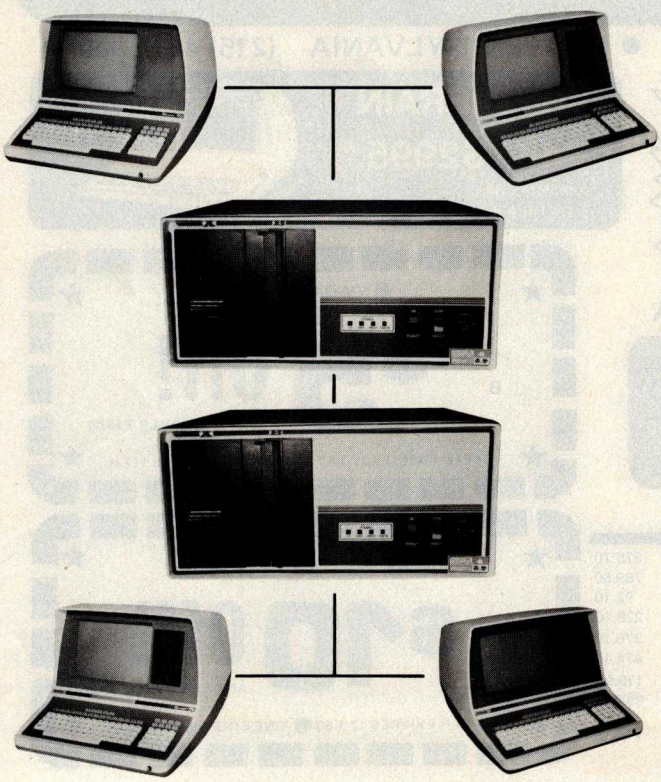

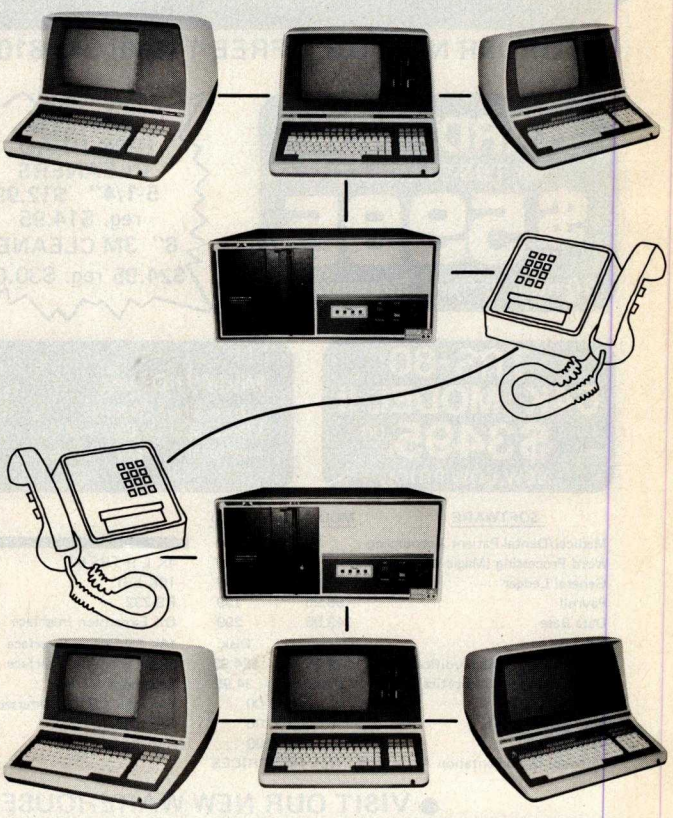

LOCAL/NET

TELEPHONE/NET

OVERSEAS

AUSTRALIA
ASP MICROCOMPUTERS
799 Dandenong Road
East Malvern 3145
Victoria, AUSTRALIA
TEL: 2118855-2118344

UNITED KINGDOM
TERODEC (MICRO SYSTEMS) LTD.
17 The Gallop, Yateley,
Camberley, Surrey
GU17 7SG ENGLAND
TEL: 0252 874790

CENTRAL EUROPE
HANNES KELLER AG
Computer-Zentrum
Eidmattstrasse 36
CH-8032, Zurich
SWITZERLAND
TEL: 01 69 36 33

SOUTH AMERICA
INVERSIONES URIMAN c.a.
P.O. Box 1041
Maracaibo 4001A,
VENEZUELA
TEL: 33015

FAR EAST
MICROBOARDS
1-7-1-1003 Saiwai-Cho
Chiba City, Chiba 260 JAPAN
TEL: 0472(47)3081


Configurability

SYSTEM/NET

LARGE SYSTEM NUCLEUS



Hard Disc and 8" Floppy
Any Combination of Master or Slave

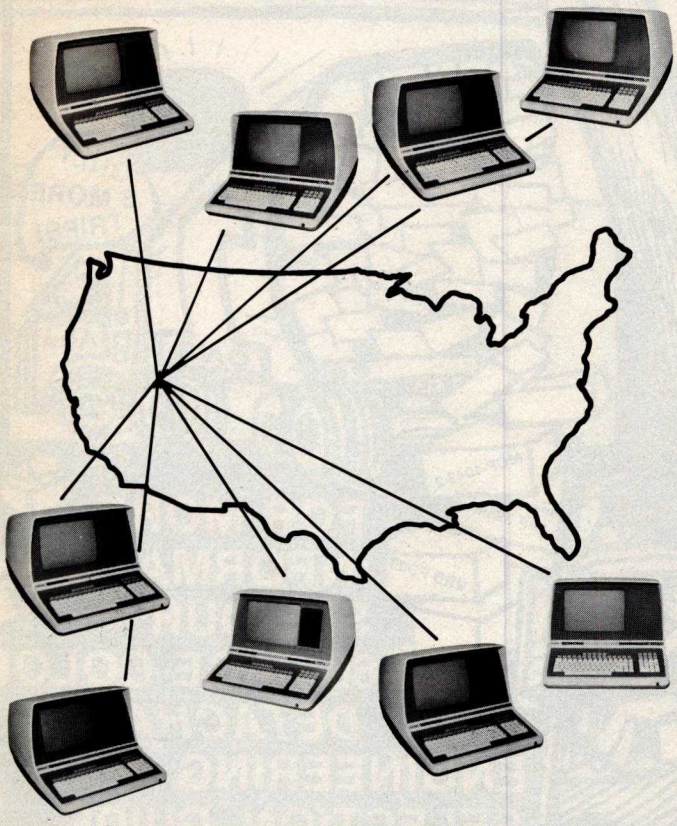

MASTER/NET

"BUY" WORD FOR THE 1980's

NETWORKING is the newest 'buzzword' in microprocessors. Delta Products has produced a superior hardware system that cannot be matched in either cost or performance.

Don't buy a system that has "designed-in" limitations; check the following:

PERFORMANCE

This is where DP/NET® beats them all. Delta does multiuser and multitasking operations by using distributed processors. DIGITAL RESEARCH has provided a new operating system (CP/NET®) which combines MP/M® and CP/M 2.2® into the world's most powerful microcomputer system.

The system cannot be bogged down by adding more users. High-speed DMA transfers from Host to Slave, allow many processors to share workloads. (There can be 3 processors at EACH user terminal; a Z-80 for screen function, and a pair of 8085/8088 for main processing.)

FLEXIBILITY

One of the most important advantages of DP/NET® is that you never have to purchase more system than you currently need. Your system can start with a 5" minifloppy 32K terminal for under $3000.00. Adding a second terminal and additional mass storage is as simple as the original purchase. Networking up to 16 OR MORE intelligent and semi-intelligent work stations can follow in perfect step with the growth of your Company and requirements.

COST

Since you never buy more computer power than you need, the system cost is matched to the demand to be placed upon it. DELTA PRODUCTS has a lot of experience in building micros, with over 2000 DELTA systems now in the field. DELTA component cost has always been extremely competitive. DELTA's new "networking system" is a natural and simple combination of the competitive "good deals" we have been offering for some time.

SOFTWARE

A computer system to the end user IS THE SOFTWARE. All CP/M® compatible programs run perfectly on the DP/NET®. DELTA PRODUCTS is currently writing its' own high-performance custom data base, screen editor, order entry/inventory, and accounting packages in PL/1®. Target release date for the complete package is November, 1980.

SOLD ONLY THROUGH DEALERSHIPS
CALL FOR YOUR NEAREST REPRESENTATIVE

DELTA PRODUCTS
15392 Assembly Lane
Huntington Beach, CA 92649
TELEPHONE: (714) 898-1492

DELTA PRODUCTS

TELEX: 681-367 DELTMAR HTBH


MP/M, CP/M2.2, PL/1 & CP/NET ARE REG. TM OF DIGITAL RESEARCH INC.

CANADA
CESCO ELECTRONICS LTD.
4050 Jean Talon Street WEST
Montreal, CANADA H4P 1W1
TEL: (514) 735-5511

BENELUX
MICROSPOT
Postbus 564-3700 AN Zeist
Verheullaan 3-3971 RD Driebergen
HOLLAND
TEL: 03438-(1)8899

Circle 376 on inquiry card.

MICROPOLIS™

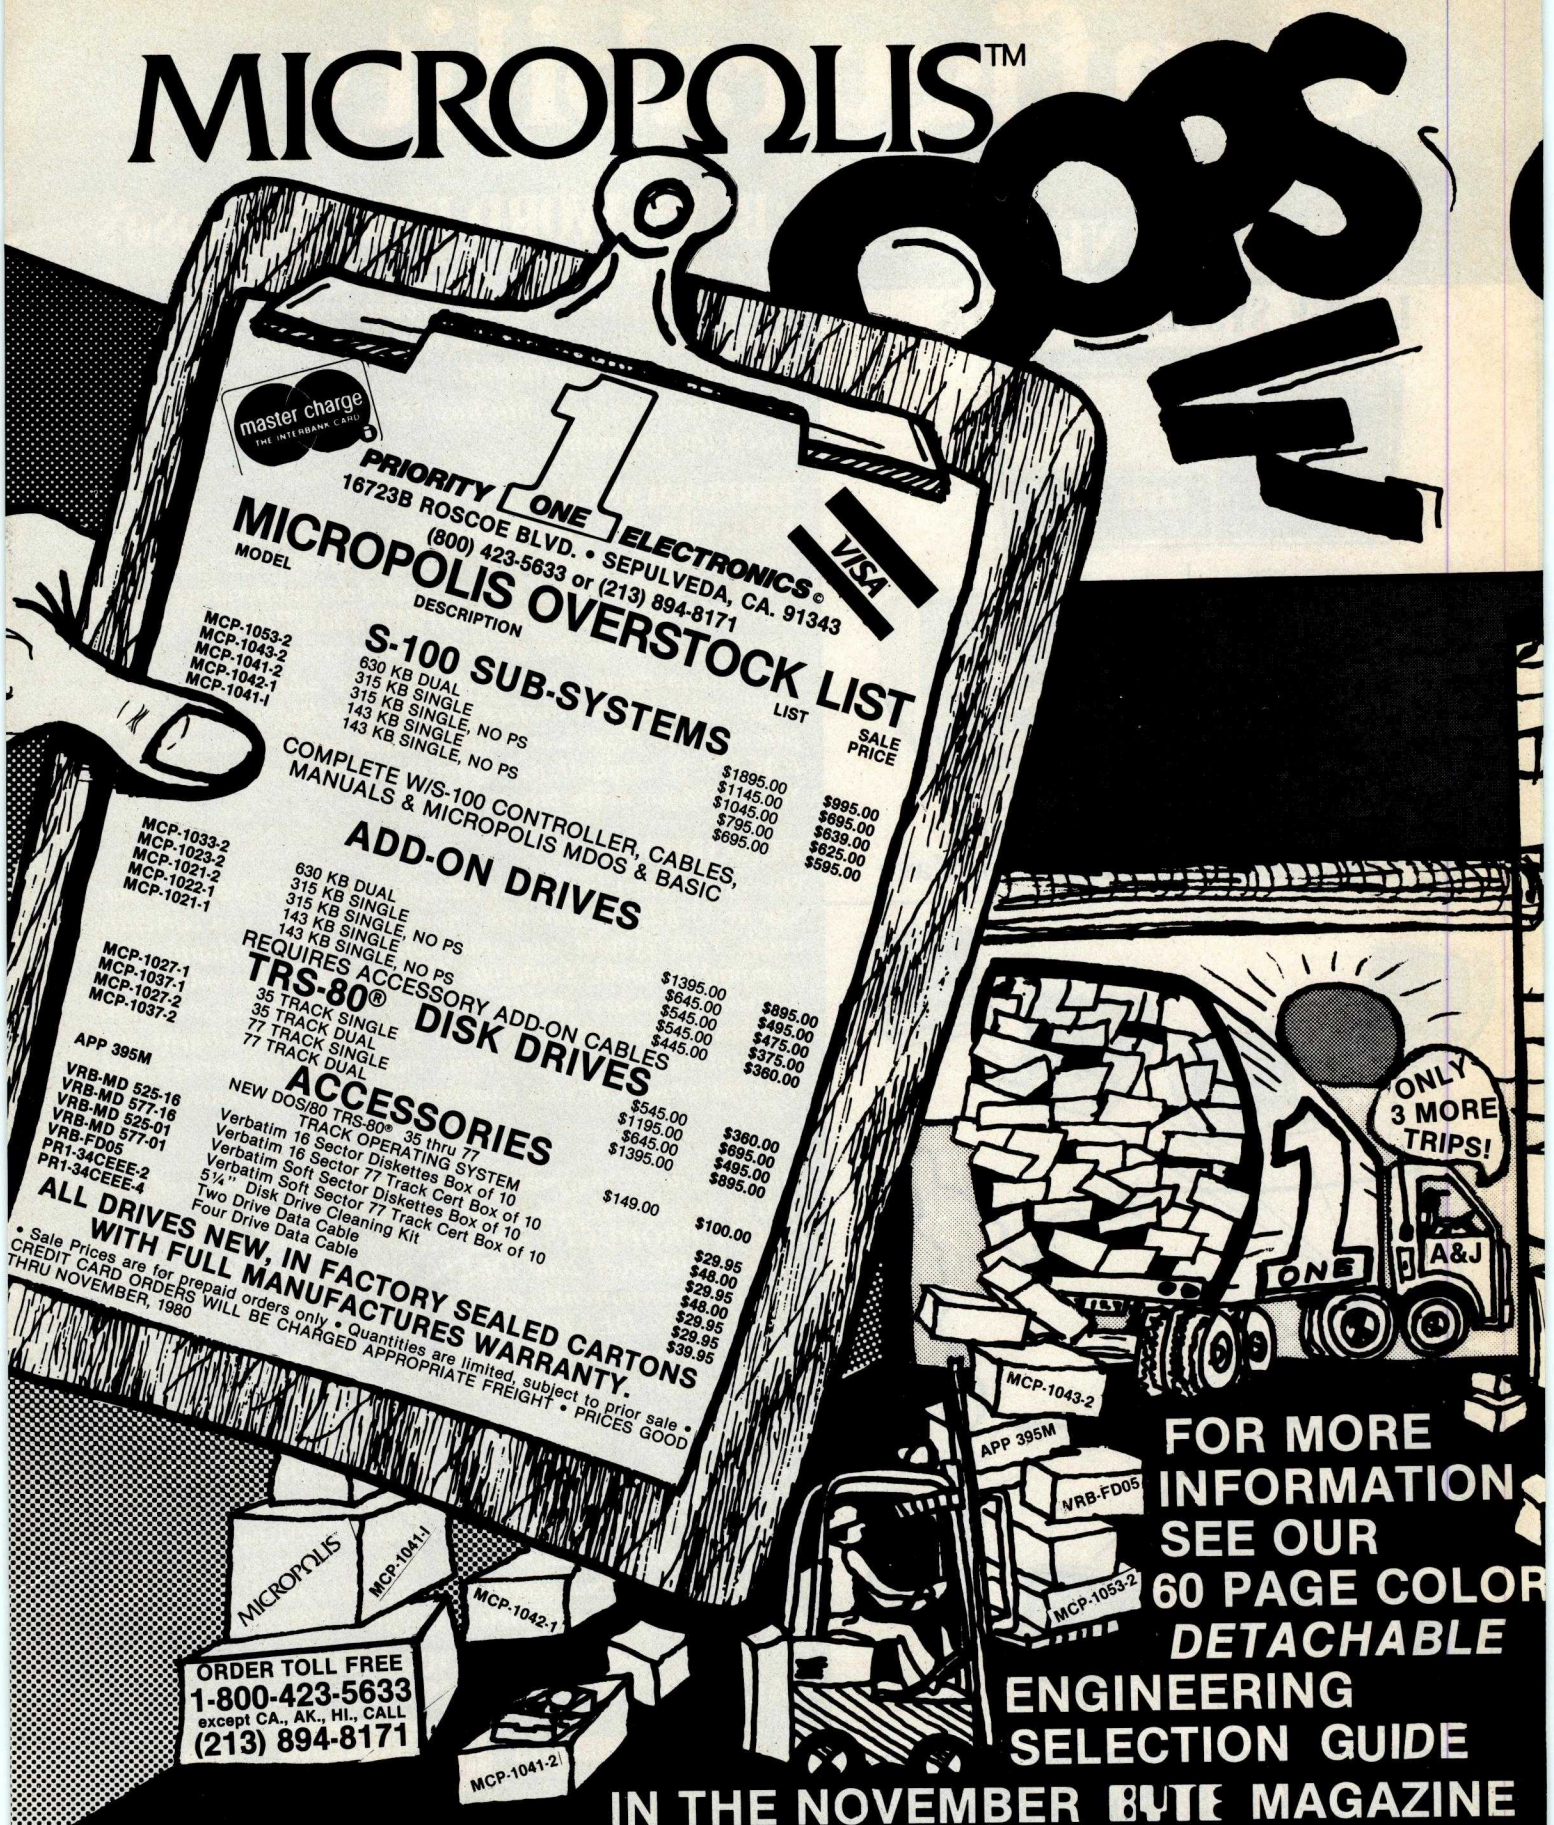

FOR MORE INFORMATION SEE OUR 60 PAGE COLOR *DETACHABLE* ENGINEERING SELECTION GUIDE IN THE NOVEMBER BYTE MAGAZINE

Terms: Visa, MC, BAC, Check, Money Order, U.S. Funds Only. CA residents add 6% sales tax. Minimum order $15.00 Prepaid U.S. orders less than $75.00 include 5% shipping and handling. MINIMUM $2.50. Excess refunded. Just in case...please include your phone number. Prices subject to change without notice. We will do our best to maintain prices thru November 1980.



Circle 377 on inquiry card.

7400

SN7400N	.19	SN74123N	.59
SN7401N	.22	SN74125N	.39
SN7402N	.22	SN74126N	.44
SN7403N	.22	SN74128N	.59
SN7404N	.22	SN74132N	.69
SN7405N	.23	SN74136N	.95
SN7406N	.23	SN74139N	.95
SN7407N	.23	SN74141N	.69
SN7408N	.26	SN74142N	2.95
SN7409N	.23	SN74143N	2.95
SN7410N	.22	SN74144N	2.95
SN7411N	.29	SN74145N	.62
SN7412N	.29	SN74147N	1.95
SN7413N	.39	SN74148N	1.20
SN7414N	.59	SN74150N	.99
SN7416N	.29	SN74151N	.67
SN7417N	.29	SN74152N	.67
SN7420N	.22	SN74153N	.67
SN7421N	.35	SN74154N	1.19
SN7422N	.29	SN74155N	.82
SN7423N	.29	SN74156N	.89
SN7425N	.29	SN74157N	.69
SN7426N	.29	SN74158N	1.65
SN7427N	.29	SN74160N	.95
SN7429N	.45	SN74161N	.95
SN7430N	.23	SN74162N	.89
SN7432N	.29	SN74163N	.87
SN7437N	.29	SN74164N	.97
SN7438N	.29	SN74165N	.97
SN7439N	.29	SN74166N	1.20
SN7440N	.24	SN74167N	1.95
SN7441N	.79	SN74170N	1.69
SN7442N	.57	SN74172N	5.95
SN7443N	.79	SN74173N	.79
SN7444N	.79	SN74174N	.89
SN7445N	.79	SN74175N	.89
SN7446N	.79	SN74176N	.85
SN7447N	.59	SN74177N	.85
SN7448N	.79	SN74179N	1.80
SN7450N	.23	SN74180N	.75
SN7451N	.23	SN74181N	1.75
SN7453N	.23	SN74182N	.75
SN7454N	.23	SN74184N	1.95
SN7459N	.29	SN74185N	1.95
SN7460N	.23	SN74186N	9.95
SN7470N	.39	SN74188N	3.90
SN7472N	.34	SN74190N	1.15
SN7473N	.38	SN74191N	1.15
SN7474N	.36	SN74192N	.85
SN7475N	.38	SN74193N	.85
SN7476N	.36	SN74194N	.85
SN7479N	4.60	SN74195N	.85
SN7480N	.59	SN74196N	.85
SN7481N	1.10	SN74197N	.85
SN7482N	1.10	SN74198N	1.39
SN7483N	.55	SN74199N	1.39
SN7485N	.65	SN74221N	1.39
SN7486N	.39	SN74251N	.95
SN7489N	1.75	SN74273N	1.05
SN7490N	.39	SN74279N	.89
SN7491N	.65	SN74283N	2.15
SN7492N	.52	SN74284N	3.90
SN7493N	.49	SN74285N	3.90
SN7494N	.72	SN74290N	1.25
SN7495N	.65	SN74298N	.95
SN7496N	.72	SN74365N	.68
SN7497N	3.10	SN74366N	.68
SN74100N	.99	SN74367N	.79
SN74107N	.32	SN74368N	.79
SN74109N	.53	SN74390N	1.90
SN74116N	1.95	SN74393N	1.90
SN74121N	.29	SN74490N	1.90
SN74122N	.39		

74LS00

74LS00N	.35	74LS164N	1.19
74LS01N	.28	74LS165N	.89
74LS02N	.28	74LS166N	2.48
74LS03N	.28	74LS168N	1.89
74LS04N	.39	74LS169N	1.89
74LS05N	.28	74LS170N	1.99
74LS08N	.39	74LS173N	.89
74LS09N	.39	74LS174N	.99
74LS10N	.28	74LS175N	.99
74LS11N	.39	74LS181N	2.20
74LS12N	.39	74LS190N	1.15
74LS13N	.47	74LS191N	1.15
74LS14N	1.25	74LS192N	.98
74LS15N	.39	74LS193N	.98
74LS20N	.26	74LS194N	1.15
74LS21N	.38	74LS195N	.95
74LS22N	.38	74LS196N	.89
74LS26N	.39	74LS197N	.89
74LS27N	.39	74LS221N	1.49
74LS28N	.39	74LS240N	1.95
74LS30N	.26	74LS241N	1.90
74LS32N	.39	74LS242N	1.95
74LS37N	.79	74LS243N	1.95
74LS38N	.39	74LS244N	1.95
74LS40N	.26	74LS245N	4.95
74LS42N	.79	74LS247N	1.10
74LS47N	.79	74LS248N	1.10
74LS48N	.79	74LS249N	1.69
74LS51N	.26	74LS251N	1.79
74LS54N	.35	74LS253N	.98
74LS55N	.35	74LS257N	.98
74LS73N	.45	74LS258N	.98
74LS74N	.59	74LS259N	2.95
74LS75N	.68	74LS260N	.69
74LS76N	.45	74LS261N	2.49
74LS78N	.65	74LS266N	.59
74LS83AN	.99	74LS273N	1.75
74LS85N	1.19	74LS275N	4.40
74LS86N	.45	74LS279N	.59
74LS90N	.75	74LS283N	1.10
74LS92N	.75	74LS290N	1.29
74LS93N	.75	74LS293N	1.95
74LS95N	.88	74LS295N	1.10
74LS96N	.98	74LS298N	1.29
74LS107N	.45	74LS324N	1.75
74LS109N	.45	74LS347N	1.95
74LS112N	.49	74LS348N	1.95
74LS113N	.49	74LS352N	1.65
74LS114N	.55	74LS353N	1.65
74LS122N	.55	74LS363N	1.49
74LS123N	1.19	74LS365N	.99
74LS124N	1.35	74LS366N	.99
74LS125N	.89	74LS367N	.73
74LS126N	.89	74LS368N	.73
74LS132N	.79	74LS373N	2.75
74LS136N	.59	74LS374N	2.75
74LS138N	.89	74LS375N	.69
74LS139N	.89	74LS377N	1.95
74LS145N	1.25	74LS385N	1.95
74LS148N	1.49	74LS386N	.65
74LS151N	.79	74LS390N	1.95
74LS153N	.79	74LS393N	1.95
74LS154N	2.49	74LS395N	1.70
74LS155N	1.19	74LS399N	2.95
74LS156N	.99	74LS424N	2.95
74LS157N	.99	74LS668N	1.75
74LS158N	.75	74LS670N	2.29
74LS160N	.98	81LS95N	1.99
74LS161N	1.15	81LS96N	1.99
74LS162N	.98	81LS97N	1.99
74LS163N	.98	81LS98N	1.99

CMOS

CD4000	.35	CD4093	.99
CD4001	.35	CD4094	2.95
CD4002	.35	CD4098	2.49
CD4006	1.39	CD4099	2.25
CD4007	.29	MC14408	12.95
CD4008	1.39	MC14409	12.95
CD4009	.49	MC14410	12.95
CD4010	.49	MC14412	12.95
CD4011	.35	MC14415	8.95
CD4012	.29	MC14419	4.95
CD4013	.49	CD4501	.39
CD4014	1.39	CD4502	1.65
CD4015	1.15	CD4503	.69
CD4016	.59	CD4505	8.95
CD4017	1.19	CD4506	.75
CD4018	.99	CD4507	.95
CD4019	.49	CD4508	3.95
CD4020	1.19	CD4510	1.39
CD4021	1.19	CD4511	1.39
CD4022	1.15	CD4512	1.39
CD4023	.38	CD4515	3.95
CD4024	.79	CD4516	1.69
CD4025	.38	CD4518	1.39
CD4027	.65	CD4520	1.39
CD4028	.85	CD4555	4.95
CD4029	1.29	CD4556	.99
CD4030	.45	CD4566	2.25
CD4031	3.25	74C00	.39
CD4032	2.15	74C02	.39
CD4034	3.25	74C04	.39
CD4035	.95	74C08	.49
CD4037	1.95	74C10	.49
CD4040	1.29	74C14	1.65
CD4041	1.25	74C20	.39
CD4042	.95	74C30	.39
CD4043	.85	74C32	.99
CD4044	.85	74C42	1.85
CD4046	1.75	74C48	2.39
CD4047	1.25	74C73	.85
CD4048	.99	74C74	.85
CD4049	.69	74C85	2.49
CD4050	.69	74C89	4.95
CD4051	1.10	74C90	1.85
CD4052	1.10	74C93	1.85
CD4053	1.10	74C95	1.85
CD4055	3.95	74C107	1.19
CD4056	2.95	74C151	2.49
CD4059	9.95	74C154	3.50
CD4060	1.39	74C157	2.10
CD4066	.75	74C160	2.39
CD4069	.35	74C161	2.30
CD4070	.49	74C163	2.39
CD4071	.35	74C164	2.39
CD4072	.35	74C173	2.59
CD4073	.35	74C174	2.75
CD4075	.35	74C175	2.75
CD4076	1.29	74C192	2.39
CD4077	.35	74C193	2.39
CD4078	.35	74C195	2.39
CD4081	.35	74C922	7.95
CD4082	.35	74C923	6.95
CD4085	1.95	MM80C95	1.50
CD4089	2.95	MM80C97	1.25

LINEAR

78H05	5.95	LM1414N	1.90
78M06	1.49	LM1458CN/N	.49
78M.G.	1.49	MC1488N	1.49
LM105H	.99	MC1489N	1.49
LM108AH	2.95	LM1496N	.89
LM300H	.79	LM1556N	1.50
LM301CN/H	.35	LM1800N	.79
LM304H	.98	LM1820N	.95
LM305H	.89	LM1850N	.95
LM306H	3.25	LM1889N	3.95
LM307CN/H	.29	LM2111N	1.75
LM308CN/H	.98	LM2900N	.99
LM309K	1.49	LM2901N	2.50
LM310CN	1.25	LM2917N	2.95
LM311D/CN/H	.98	CA3013T	2.29
LM312H	1.75	CA3018T	1.99
LM317T	2.75	CA3021T	3.49
LM318CN/H	1.49	CA3023T	2.99
LM319N/H	1.25	CA3035T	2.75
LM320K-XX*	1.49	CA3039T	1.49
LM320T-XX*	1.25	CA3046T	1.29
LM320H-XX*	1.25	LM3053N	1.49
LM323K	4.95	CA3059N	3.25
LM324N	1.25	CA3060N	3.25
LM339N	.95	CA3062N	4.95
LM340K-XX*	1.49	LM3065N	1.49
LM340T-XX*	1.25	CA3080N	1.29
LM340H-XX*	1.25	CA3081N	1.69
LM344H	1.95	CA3082N	1.69
LM348N	1.85	CA3083N	1.99
LM358CN	.98	CA3086N	1.29
LM360N	1.49	CA3089N	2.75
LM372N	1.95	CA3096N	2.49
LM376N	3.75	CA3097N	1.99
LM377N	3.75	CA3130T	2.49
LM380CN/N	1.25	CA3140T	2.49
LM381N	1.79	CA3146N	2.49
LM383T	1.95	CA3160T	1.49
LM386N	1.49	CA3190N	1.95
LM387N	1.49	CA3401N	.69
LM390N	1.95	MC3423N	1.49
NE531V/T	3.75	MC3460N	3.95
NE555V	.39	SG3524N	3.95
NE556N	.98	CA3600N	3.50
NE561T	19.95	LM3900N	.59
NE562B	7.95	LM3905N	1.49
NE565N/H	1.25	LM3909N	.98
NE566H/V	1.75	RC4131N	2.95
NE567V/H	1.50	RC4136N	1.10
NE592N	2.75	RC4151N	4.50
LM702H	2.99	RC4194	4.95
LM709N/H	.29	RC4195	4.40
LM710N/H	.98	ULN2001	1.25
LM711N/H	.39	ULN2003	1.50
LM715N	1.95	SN75450N	.59
LM723N/H	.75	SN75451N	.49
LM733N/H	.98	SN75452N	.49
LM739N	1.15	SN75453N	.49
LM741CN/H	.33	SN75454N	.49
LM741CN-14	.19	SN75491N	.89
LM747N/H	.79	SN75492N	.89
LM748N/H	.39	SN75493N	.89
LM760CN	2.95	SN75494N	.89
LM1310N	1.90		

16K UPGRADE ONLY **$49.95** SPECIFY COMPUTER

ADVANCED COMPUTER PRODUCTS

NEW! We Now Have The **Apple Silentype** IN STOCK

With Apple Intelligent Interface Card. Reg. **$595.00**

Interface Card Has All Software For Hi-Reg. Graphics & Pascal Use. NOW ONLY **$549.00**

BECKMAN Digital Multimeters

MODELS TECH 300 AND TECH 310

AS LOW AS $100

Choice of Models – The TECH 310 has all above features, 7 functions, 29 ranges, plus 0.25% Vdc accuracy.
The TECH 300 has a 0.5% Vdc accuracy and all the above features, but without Insta-Ohms™ continuity function or the 10 amp current ranges.

TECH 300 Digital Multimeter	$100.
TECH 310 Digital Multimeter	$130.
VC-201 Vinyl Carrying Case	$10.
DC-202 Deluxe Carrying Case	$24.
HV-211 High Voltage Probe	$35.
RP-221 RF Probe	$35.
Ct-231 AC Current Clamp	$42.
DL-241 Deluxe Test Lead Kit	$10.
TL-242 Spare Test Leads	$6.

NEW! Vista™ **MUSIC MACHINE 9© WITH 9 VOICES!**

● NEW! Uses latest State of the Art LSI Technology ● Requires only one slot for 9 voices ● Uses three AY3-8910's to produce nine voices ● Plays music generated by the ALF Board ● ALF software required ● APPLE™ II compatible

ASSEMBLED AND TESTED **$129.95**

FLOPPY DISK DRIVES

MPI B51-5¼", 40 tracks	279.00
Shugart SA400-5¼" 35 tracks	295.00
Shugart 800/801R 8"	475.00
Siemens Shugart Compatible Model FDD-120-8D	429.00
PERSCI Model 277 Dual	1195.00
WANGO/SIEMENS 5¼" Drive	290.00
MPI B52 5¼" Dual	348.00
WANGO/SIEMENS 282 Dual 5¼"	395.00
WANGO/SIEMENS 82	290.00

CSC CONTINENTAL SPECIALTIES

Model LM-3 40-channel Logic Monitor	585.00
Model LM-1 Logic Monitor	60.00
Model LM-2 Logic Monitor	147.00
MAX-100 100 MHz Portable Frequency Counter	149.00
Model LP-1 Digital Logic Probe	50.00
Model LP-2 Economy Logic Probe	28.00
Model LP-3 High Speed Logic Probe	77.00
Model LPK-1 Logic Probe Kit	21.95
Model LTC-1, LTC-2 Logical Analysis Kits	220/250

Proto Clips

14-Pin Clip	PC-14	$ 4.25
16-Pin Clip	PC-16	$ 4.50
24-Pin Clip	PC-24	$ 9.50
40-Pin Clip	PC-40	$14.95

Proto Boards

PB-6	16.95	PB-104	54.00
PB-100	18.00	PB-203	97.00
PB-101	21.00	PB-203A	149.00
PB-102	25.00	PB-203A-Kit	129.00
PB-103	43.00		

Apple II. 16K or Apple II. Plus $990

DISK SYSTEM SPECIAL

Apple II Plus w/48K Supermod Video Modulator
Disk II w/Controller Integer Based ROM Card.
Reg. $2,220.00, ACP Price $1819.00 SAVE **$401.00**

Hi-Speed Serial I/O	$189.00	DS65 Digi-Sector	$349.00	Integer ROM Card	$189.00
Centronics Printer I/O	180.00	Apple Graphics Tablet	675.00	Proto Card	21.95
Applesoft II Firmware	189.00	D.C. Hayes Modem II	349.95	M & R Modulator	29.95
Apple Clock	269.00	Disk II w/Controller	559.00	Sanyo Cassette	54.95
Introl X-10 System	179.95	Disk II	459.00	16K Upgrade Kit	54.95
Introl X-10 Controller	269.95	Pascal Lang. System	450.00	Desktop Plan	98.00
Alf Music Synthesizer	259.95	Parallel Printer Card	165.00	8" Floppy Controller	350.00
16 Ch. Analog Input	249.95	Communications Card	189.00	Heuristics Speechlab	179.00
2 Ch. Analog Output	164.95	Business Software Pkg	625.00	Romplus +	169.00
13-Key Keypad	119.95	Corvus 10 Megabyte Drive	4625.00	Supertalker	279.00
Visi-Calc	125.00			Cashier	250.00

NEW! California Computer Systems APPLE Clock. Only **$124.95**

NEW! Z80 Softcard for APPLE CPM 2.2 & M BASIC 5.0 **$325.00**

ATARI® 800 & 400 Personal Computer System

ATARI 800 $825.00
ATARI 400 $449.00

ATARI 800 Includes: Computer Console, BASIC Lang. Cartridge, Education System Master Cartridge, BASIC Language Programming Manual, 800 Operator's Manual w/Notebook, Atari 410 Program Recorder, 16K RAM Module, Power Supply, TV Switch Box.

Peripherals		**Education System Cassette Programs**		Spelling	35.00
Disc Drive	599.00	U.S. History	35.00	Basic Electricity	35.00
Printer	499.00	U.S. Government	35.00	Basic Algebra	35.00
Program Recorder	69.00	Supervisory Skills	35.00	**Basic Game and Program Cassettes**	
Software – ROM Cartridges		World History (Western)	35.00	Guide to BASIC Programming	18.00
Education System Master Cartridge	28.00	Basic Sociology	35.00	BASIC Game Programs	19.00
Atari BASIC	55.00	Counseling Procedures	35.00	**Add-On Memory**	
Assembler Debug	55.00	Principles of Accounting	35.00	8K RAM Memory Module	110.00
Basketball	42.00	Physics	35.00	16K RAM Memory Module	225.00
Life	42.00	Great Classics (English)	35.00	**Diskettes**	
Super Breakout™	42.00	Business Communications	35.00	Blank Diskettes	
Music Composer	55.00	Basic Psychology	35.00	Disk File Manager	5.00
Super Bug™	42.00	Effective Writing	35.00	**Accessory Controllers**	
Computer Chess	55.00	Auto Mechanics	35.00	Driving Controller Pair	18.00
Home Finance	55.00	Principles of Economics	35.00	Paddle Controller Pair	18.00
				Joystick Controller Pair	18.00

TEXAS INSTRUMENTS INCORPORATED 99/4 PERSONAL COMPUTER

Superior Color, Music, Sound and Graphics – and a Powerful Extended Basic – All Built In.

TI 99/4 Console only available for $659.00 **$1099.00**

Commodore PET AS LOW AS $775.00

DISCOUNT PRICES

2001-8K	775.00	2023 80-Col Plain Paper Printer	695.00
2001-16KN	975.00	2040 Dual Mini Disk Drive	1250.00
2001-16KB (reg)	975.00	Pet to IEEE Cable	39.95
2001-32KN	1250.00	IEEE to IEEE Cable	49.95
2001-32KB (reg)	1250.00	C2N External Cassette Deck	95.00
2022 80-Col Dot Matrix Printer	795.00		

SINGLE BOARD COMPUTER SELECTION GUIDE

BOARD	PROCESSOR	ACP PRICE	ENCLOSURE	BOARD	PROCESSOR	ACP PRICE	ENCLOSURE
KIM-1	6502	169.00	Add 29.95	SC-SBC100	Z80	239.00	N/A
SYM-1	6502	239.00	Add 39.95	AIM 65	6502	375.00	Add 49.95
Cromemco	Z80	409.00	N/A	Cosmac Vip	1802	199.00	Inc.

ACP'S INTELLIGENT COMPUTER PRODUCTS & GADGETS

Order now in time for Christmas

THE BONE FONE



- SKIERS
- JOGGERS
- SKATERS
- CYCLERS

You must hear it and feel it to believe it!

AM/FM stereo surrounds and fills your body with sound. No earplugs. You wear it!

$65.95



SPEAK & SPELL $59.95 | **SPEAK & MATH** $75.95 | **SPEAK & READ** $82.95

Texas Instruments' remarkable new family of talking learning aids. Each is based on time-proven learning techniques that help children reach genuine learning objectives. And their built-in games and activities make learning fun!

Additional modules for Speak & Spell: Vowel Power, Super Stumpers 4, 5, 6 and 7, 8, Mighty Verbs, Homonym Heroes $15.95.

Additional modules for Speak & Read: Who's Who at the Zoo, and Sea Sights $15.95

QUARTZ LCD WATCH WITH SNOOZE ALARM

The looks and functions of the expensive models at an affordable price.




NEW!
6 FUNCTIONS
- HOURS
- MINUTES
- SECONDS
- MONTH
- DATE
- DAY

All in a smart silvertone metal with matching bracelet.

An Outstanding ACP Value
ONLY **$21.95**

FIREFOX RADIO CONTROLLED OFF-ROAD VEHICLE



For rough roads, smooth roads, high speed chases, it handles 'em all.

Tough and ready for any challenge, this crosscountry, all-terrain R/C action-wagon comes through like a champ. Rough roads, handles 'em all. Digital proportional steering makes easy handling in forward, reverse, right, and left turns – and two speeds. Takes one 9-volt battery for the transmitter, 6 "C" batteries and one 9-volt battery for the car.

SPECIFY RED OR SILVER **$49.95**

INTRODUCING THE CALCULIGHTER

The only lighter in the world that adds, subtracts, multiplies, divides and lights!



- LUXURIOUS BUTANE LIGHTER
- 8 DIGIT FOUR FUNCTION CALCULATOR

An exquisite gift item for any occasion. Different, unique. A beautifully designed and functional accessory. Three designer metal finishes: gold, silver, or black.

	SUGG. RET.	ACP PRICE
GOLD	95.00	**$69.96**
SILVER	85.00	**$59.95**
BLACK	85.00	**$59.95**

RETAIL STORES OPEN MON-SAT

STORE #1 1310 "B" E. Edinger, Santa Ana, CA 92705 – Showrooms, Retail, Warehouse

STORE #2 674 El Camino Real, Tustin, CA 92680 – Specializing in Systems

P.O. Box 17329 Irvine, Calif. 92713
Direct Order Lines: (714) 558-8813
(800) 854-8230 or (800) 854-8241

FOR INTERNATIONAL ORDERS:
1401 E. Borchard (714) 953-0604
Santa Ana, CA 92705 TWX: 910-595-1565

Circle 378 on inquiry card.

ADVANCED COMPUTER PRODUCTS

GET YOUR 1980 CATALOG

FIRST TO OFFER PRIME PRODUCTS TO THE HOBBYIST AT FAIR PRICES!

1. Proven Quality Factory tested products only.
2. Guaranteed Satisfaction
3. Over $1,000,000.00 Inventory

1980 CATALOG NOW AVAILABLE.

Send $2.00 for your copy of the most complete catalog of computer products. A must for the serious computer user.

STATIC RAM BOARDS

Now less than 1½¢ per bit!

- **S-100 32K** (uses 2114)

ASSEMBLED		Kit	
450ns.	499.00	450ns.	469.00
250ns.	539.00	250ns.	499.00

Bare Board 49.95
Bare Board w/all parts less mem. 99.95

- **S-100 16K** (S-100 Compatible) **WOW!**
  - Low Power
  - 2 MHz or 4 MHz
  - Assembled & Tested
  - 2 MHz . . . **$250.00**
  - 4 MHz . . . **$265.00**
- **LOGOS I 8K**

ASSEMBLED			KIT		
450 ns.	149.95		450ns.	125.95	
250ns	169.95		250ns	149.95	

Vector Graphic 8K Kit $139.95
Bare PC Board w/Data $21.95
"Special Offer" Buy (4) 8K 450ns. Kits $117.00

The VISTA V-80 Disk Drive System — TRS80 ADD-ON

- 23% more storage capacity than TRS-80
- 120 day warranty
- 40 track patch at NO CHARGE

SALE $299.00

THE VISTA V-200 FOR EXIDY

Price: Starting as low as **$1199.00**

Item	Storage Capacity	Drive Configuration	Shipping Weight	Price
V200 E-20	400	2 Drive Single Head	25 lbs	1199.00
V200 E-22	800	2 Drive Double Head	25 lbs	1549.00
V200 E-30	600	3 Drive Single Head	32lbs	1524.00
V200 E-32	1.2 MEG	3 Drive Double Head	32 lbs	1999.00

ATTENTION VIDEO HOBBYISTS!!!

- ★ BOX BUILDERS
- ★ USE AS REMOTE TUNER/TIMER
- ★ FULL SCHEMATICS AVAILABLE
- ★ FOR ONLY $5.90! – FREE W/PURCHASE

A Recent Special Purchase Allows Us To Present The Following:

NEW, UNUSED COMPONENTS

From The RCA VDT-201 Videocassette Recorder

1. UHF/VHF Tuner Subassembly with all knobs and Video Demodulator	$59.95
2. RF Modulator with Audio & Video inputs. Channel 3 or 4 Output	$39.95
3. Digital Clock Module AM/PM Fluorescent Readout (Green)	$19.95
4. 300 Ohm to 75 Ohm Matching or	$ 2.49
5. Complete Set of All The Above for Only	Subtotal $123.34 $74.95

Please Call For Volume Discounts

RAM BOARDS SPECIAL

16K Altair Mits Dynamic RAM Boards — **16K**
Assem. & Tested $119.95 Untested $95.00

LOW COST FLOPPY DISK SUBSYSTEM

Siemens FDD 120-8 (2) VISTA Floppy Controller (S-100), Case, Power Supply & Cable, CP/M Disk Operating System Assembled & Tested
Walnut Wood Sides **$1499.00**
★CHECK OUR FLOPPY DISK PRICING ON THIS PAGE★
SAVE $300.00 ($1799.00 VALUE)

WATANABE MIPLOT

Max pen speed 50 mm/sec. resolution 10 mm typically .05 mm, built-in character generator sizes and 4 degrees of rotation; absolute draw, relative draw, alpha printing done with simple commands.

$1195.00

IMS STATIC RAM BOARDS

	250 ns.	450 ns.
8K Static	$209.00	$189.00
16K Static	$449.00	$399.00
32K Static	$729.00	$629.00

CENTRONICS PRINTER

Model 737

- Centronics complete printer
- The 737 has everything. Check and compare the features.
- New low price **$835.00**

SALE! SD SYSTEMS BOARDS

TAKE 10% OFF!

	KIT	ASSEM
SBC 100 Single Board Computer (2MHz)	$265.00	$ 349.00
SBC 200 Single Board Computer (4MHz)	299.00	399.00
Z80 Starter System	319.00	449.00
VDB 8024 Video Display Board	335.00	459.00
Versa-Floppy II	325.00	429.00
Expando PROM	115.00	225.00
SD100 Computer System w/64K	–	6995.00
SD200 Computer System w/64K	–	7995.00

6800 MICROMODULE™ PRICE LIST

MODEL NO.	DESCRIPTION	PRICE
9600A	Single Board Microcomputer	$495.00
9609	Advanced Single Bd. Comp. (6809)	595.00
9601	16 Slot Mother Board	175.00
9602	Card Cage	75.00
9603	8 Slot Mother Board	100.00
9604	Power Supply	275.00
9605	DC Input Power Supply	325.00
9610	Utility Proto Board	39.00
9611	Arith. Proc/Memory Module	495.00
9612	Buffered Utility Proto Board	49.00
9616	32K EPROM/RAM Module	250.00
9617	EPROM Programming Head	250.00
9620	16 Channel Parallel I/O Module	295.00
9622	Serial-Parallel I/O Module	325.00
9627	16K Static RAM Module 470ns	395.00
9629	32K Static RAM 450ns	695.00
9629A	32K Static RAM 200ns	895.00
9630	Card Extender	68.00
9640	Multiple Programmable Timer	395.00
9650	8 Channel Duplex Serial I/O Mod.	395.00
9655	Intelligent Tape Controller	550.00
96103	32/32 I/O Module	275.00
96702	Contact Closure Module	350.00

UNPOPULATED BOARDS (Also Available)

APPLE/EXIDY/EXPANDO TRS 80 16K-UPGRADE KIT

$49.95 TRS-80/APPLE $49.95

MEMORY EXPANSION KITS,
4116's, 16K (200/250 ns.)
8 pcs for **$49.95**
w/instructions & jumpers
Call For Volume Pricing

★ Special: TRS80 Schematic . . . . . $ 4.95
★ Expansion Interface Schematic . . $ 4.95
★ Expansion Interface Connector . . . 7.95

EXPANDORAM II MEMORY KITS

★ Bank Selectable ★ Uses 4116 200 ns.
★ Write Protect ★ Power 8VDC, ±16VDC
★ Phantom NEW LOW PRICES ★ Up to 4 MHz

Expando 64 Kit (4116) Assem. & Tested Add $50.
16K $269.00 48K $435.00
32K $349.00 64K $505.00

SOROC TERMINALS SALE

IQ 120 . . . . $ 695.00
IQ 140 . . . . 995.00

UV "Eprom" Eraser

Model UVs-11E $69.95
Holds 4 Eprom's at a time. Backed by 45 years experience.
Model S-52T...$265.00
Professional Industrial Model

EMAKO-20.. Reg. $777.00 $599.00

UNBELIEVABLE!!
125 Caps, 60 lpm-Vertical Formal Unit - 96 Characters - Upper/Lower Case - 4.5" to 9.5" Adjustable - 80 col/40 col double width - Full 96 char. ASCII

EMAKO-22.....$799.00

Prints a 132 col/line. Available with parallel or serial output at same price.

VISTA PRINTER Vista

25 CPS, Full Character Daisy Wheel, 136 Column Model
No. FP1500 **$1995.00**

BASE II PRINTER

80 Column Impact Printer

- 60 Lines Per Minute
- 115/230 VAC, 50 or 60 Hz.
- 72, 80, 96, 120 or 132 Char/Line
- Self-Test Switch

REG. $699.00

WITH ALL OPTIONS ACP PRICE **$599.00**

Option "M" Terminal Screen Buffer (1920 Char.) $50.00
Option "S" High Speed Paper Advance & Graphics 50.00
Option "T" Tractor Feed 50.00

Z-80/Z-80A/8080 CPU BOARD

★ On board 2708 ★ 2708 included (450ns.)
★ Power on jump ★ Completely socketed.

- Z-80 Assembled and Tested $185.00
- Z-80 Kit $129.95
- Z-80 Bare PC Board . . . . . $ 34.95
- ★ For 4MHz Speed Add $15.00

8080A Kit . . . . . $ 99.95
8080A Assembled $149.95

S-100 MOTHERBOARD SPECIAL

8 slot expandable w/9 conn.
reg $69.95 . . . . . NOW $52.95

SIEMEN'S FLOPPY

SALE SIEMENS $429.00 SHUGART 801 R $475.00

- Special buy while supply lasts.
- 8" Drive with Diskettes
- 90 Day Warranty

★CHECK OUR FLOPPY DISK PRICING! ON THIS PAGE

ACOUSTIC MODEM

NOVATION CAT™ 0-300 Baud
Bell 103 Answer, Originate

149.95

'D' CAT MODEM AVAILABLE SOON

CALL FOR PRICE

MONITORS

Sanyo 12" Data Display DM5112CX	$325.00	Zenith 13" Color Monitor	499.00
		MGA 13" Color TV	349.00
Motorola 12", High Resolution 22 MHz, OEM Model #M3000-340	219.00	VAMP 19" Color Monitor	575.00
		VAMP 15" Color Monitor	449.00
		Sanyo 9"	169.95
Motorola 5" Model #1000-155(OEM)	119.95	Sanyo 15"	279.00
		Leedex 12"	139.95

DATA BOOKS • COMPUTER BOOKS

1980 IC Master	$59.95
INTEL Data Book	7.50
INTEL MCS 85 Manual	7.50

SALE • OSBORNE BOOKS • SALE	Reg.	Sale
Intro to Micros Vol. 0	9.50	7.75
Intro to Micros Vol. I	9.50	7.75
8080A Programming	9.50	7.75
6800 Programming	9.50	7.75
8080 Programming	9.50	7.75
Vol. II Some Real Microprocessors w/Binder	39.95	27.50
Vol. III Some Real Support Devices w/Binder	26.95	18.50
Intro to Micros Vol. III	26.95	18.50

SALE • SYBEX COMPUTER BOOKS • SALE	
6502 Games	$12.95
Intro. to Personal & Business Computing	12.95
Microprocessors From Chips to Systems	12.95
Microprocessor Interfacing Techniques	12.95
Programming the Z80	12.95
Programming the Z8000	12.95
Programming the 6502	12.95
6502 Applications Book	12.95

MICROPROCESSORS

Z8001 16 bit to 8Mb.	$189.00
Z8002 16 bit to 64K	149.00
Z80	**10.75**
Z80A	14.50
F-8 (3850)	16.95
2650	18.95
CD1802	13.95
8080A	8.50
8080A-4MHz	19.95
SALE 8085	14.95
8008-1	14.95
2901	9.90
2901A	14.95
2903 4-bit Superslice	29.95
TMS 9900JL	49.95
CP1600	39.95
6502	11.50
6502A	16.95
IM6100	29.95
6800	**11.75**
6800B 2.0 MHz	19.95
6802P	17.95
8035	19.95
8755	49.95
8748	69.95
6809	37.95
8086	69.95

ADVANCED SUPPORT

AM9511 Arith. Processor	175.00
9512 Arith Processor	175.00
9513 Univ. Timing	79.95
AM9517 DMA Controller	18.95
AM9519 Universal Interrupt	18.95

Z-80 SUPPORT CHIPS

Z80-PIO	2.5 MHz		8.75
Z80A-PIO	4.0 MHz		12.95
Z80-CTC	2.5 MHz		8.75
Z80A-CTC	4.0 MHz		12.95
Z80-DMA	2.5 MHz		29.95
Z80A-DMA	4.0 MHz		36.95
Z80-SIO/0	2.5 MHz		35.95
Z80A-SIO/0	4.0 MHz		39.40
Z80-SIO/1	2.5 MHz		35.95
Z80A-SIO/1	4.0 MHz		39.40
Z80-SIO/2	2.5 MHz		35.95
Z80-SIO/2	4.0 MHz		39.40

8080/8085 SUPPORT

8155/8156 I/O	24.95
8755 I/O with Eprom	64.95
8202 Dyn. Ram Cont.	34.95
8205/74S 138 Decoder	3.95
8212 8 bit I/o	2.75
8214 Priority Int.	5.25
8216 Bus Driver	2.75
8224 Clock Gen.	2.95
8224-4 (4MHz)	9.75
8226 Bus Driver	3.95
8T26 Bus Driver	2.95
8228 Sys. Control.	5.50
8238 Sys. Cont.	5.50
8251 Prog. I/O	6.95
8253 Int. Timer	12.95
8255 Prog. I/O	6.50
8257 Prog. DMA	16.95
8259 Prog. Int.	17.95
8275 CRT Controller	49.95
8279 Prog. Keyboard	15.95

6800 SUPPORT CHIPS

6810 128 x 8 Ram	4.75
6820 PIA	5.95
6821 PIA	6.50
6828 Priority Int.	9.95
6834-1 512 x 8 Eprom	16.95
6845/HD6550 CRT Cont.	21.95
6847 Color CRT	49.95
6850 ACIA	5.95
6852 Serial Adapter	5.95
6860 Modem	10.95
6862 Modulator	11.95
6871A 1.0MHz OSC	25.95
6875	6.95
6880 Bus Driver	2.95
MC68488	19.95
68047	24.95

SHIFT REGISTER SALE

2503V	1.49	2525	1.49
2504V	1.49	2527	1.49
2507V	1.49	2528	1.49
2517V	1.49	2529	1.49
2524V	1.49	2533	1.49

6502 SUPPORT CHIPS

6520 PIA	7.50
6522 Mult.	11.95
6530-002,003,004,005	21.95
6532	19.95
6551	19.95

PROMS

2708 450 ns.	8.25
2708-6 650 ns.	7.50
1702A	4.95
2732	74.95
2716-5V	14.95
2716-5V, 12V	29.95
2758-5V	29.95
5203AQ	13.95
5204AQ	14.95
IM 5610	3.90
SALE 8223 32 x 8	**2.95**
82S115 512 x 8 (TS)	16.95
82S123 32 x 8	4.90
82S126 256 x 4	4.90
82S129 256 x 4 (TS)	4.90
82S130 512 x 4 (OC)	6.50
82S23	6.95
82S131	14.95
82S137	14.95

NOTE: WE PROGRAM PROMS

CHARACTER GEN.

2513-001 (5V) Upper	9.50
2513-005 (5V) Lower	10.95
2513-ADM3 (5V) Lower	14.95
MCM6571	11.75
MCM6571A	11.75
MCM6574	14.50
MCM6575	14.50

UARTS/BAUD RATE

TR1602B (5V, 12V)	3.95
AY51013 (5V, 12V)	4.95
AY51014A/1612 (5-14V)	6.95
AY5-1013A-1863 (5V)	6.95
TMS 6011 (5V, 12V)	5.50
IM6402	7.95
IM6403	8.95
2350 USRT	9.95
1671B Astros	24.95
SALE TR1472B	**9.95**
MC14411	11.95
4702	14.95
WD1941	9.95
COM 5016	16.95

KEYBOARD ENCODERS

AY5-2376	13.75
AY5-3600	13.75
HD0165	9.95
74C922	9.95
74C923	9.95

STATIC RAMS

	1-24	25-99	100
21L02 450ns.	1.30	1.25	.99
21L02 250ns.	1.59	1.55	1.15
2111	3.75	3.65	3.55
2112-1	2.95	2.85	2.65
2101-1	2.90	2.70	2.55
2114L-250ns. (4045)	6.50	5.95	5.50
2114L-450ns. (4045)	5.50	5.25	**4.75**
4044 250 ns.	8.95	7.50	6.90
4044 450ns.	5.95	5.95	**4.75**
EMM4200A	9.75	8.75	7.95
EMM4402	7.95	7.25	6.25
74589	2.95	2.50	2.25
5101C-E	7.95	7.95	7.25
AMD9140/41	10.95	10.25	9.25
AMD9130/31	12.95	11.95	10.25
1101	1.95	1.75	1.25
P2125/93425 (45ns.)	9.95	8.35	6.25
6508 1K x 1 CMOS	7.95	7.95	7.25
6518 1K x 1 CMOS	7.95	7.95	7.25
74S189 64 bit Ram	3.95	3.25	2.50
2147 Low Power 4K Static	19.95	18.95	16.95

SALE 2102 89

DYNAMIC RAMS

416/4116 16K (16 Pin)			8.75
Set of 8 416's			49.95
4115 8K (16 Pin)			6.95
4050 4K x 1 (18 Pin)			4.95
4060 4K x 1 (22 Pin)			4.95
4096 4K x 1 (16 Pin)			3.95
2104 4K x 1 (16 Pin)			4.75
4027 4K x 1 (16 Pin)			4.95
5261	1.95	1103	1.95
5262	1.95	4008L	4.95
5270	4.95	6605	7.95
5280	4.95	6604	4.95
5290	12.45	6002	1.50

64K RAMS $159.95

SOCKETS

# Pins	Lo-Pro Soldertail	Wire Wrap 3 Level Tin	Gold
8	.15	.32	.45
14	.19	.36	.59
16	.20	.38	.62
18	.24	.59	.84
20	.29	.69	.99
22	.24	.79	1.10
24	.38	.85	1.20
28	.43	1.10	1.49
36	.58	1.25	1.69
40	.60	1.40	1.89

ZERO INSERTION FORCE

16 Pin $5.50 24 Pin $7.50 40 Pin $10.25

LED READOUTS

Part No.	Size	Color	Description	Price
DL704	.300	Red	Comm. Cathode	99
DL707	.300	Red	Comm. Anode	99
FND357	.357	Red	Comm. Cathode	99
FND501	.500	Red	Comm. Cathode (+1)	99
FND503 (500)	.500	Red	Comm. Cathode	99
FND507 (510)	.500	Red	Comm. Anode	99
FND508	.500	Red	Comm. Anode (+1)	99
FND530	.500	Green	Comm. Cathode	1.49
FND550	.500	Orange	Comm. Cathode	1.49
FND803 (800)	.800	Red	Comm. Cathode	1.75
FND807 (810)	.800	Red	Comm. Anode	1.75
HP5082-7340	.600	Red	4 x 7 Hexadecimal	20.95
HP5082-7300	.600	Red	4 x 7 Sq. Digit RHD	18.95
HP5082-7731	.300	Red	Comm. Anode	.75
TIL305	–	Red	Array 5 x 7	7.95
TIL308	.270	Red	Numerical Display	10.95
TIL309	.270	Red	Numerical Display	9.95
TIL311	.270	Red	4 x 7 Hexidecimal	10.95
MAN2A	.320	Red	Array	5.95
MAN10A	.270	Red	Alpha Numeric	8.95
XAN3061	.300	Red	Comm. Anode Right DP	1.25
XAN3062	.300	Red	Comm. Anode Left DP	1.25
XAN3063	.300	Red	Overflow, CA, Left DP	1.25
XAN3064	.300	Red	Comm. Cathode Right DP	1.25
XAN3051	.300	Green	Comm. Anode Right DP	1.99
XAN3052	.300	Green	Comm. Anode Left DP	1.99
XAN3053	.300	Green	Overflow CA, Left DP	1.99
XAN3054	.300	Green	Comm. Cathode Right DP	1.99
XAN3081	.300	Yellow	Comm. Anode, Right DP	2.10
XAN3082	.300	Yellow	Comm. Anode, Left DP	2.10
XAN3083	.300	Yellow	Overflow CA, Left DP	2.10
XAN3084	.300	Yellow	Comm. Cathode, Right DP	2.10

IC SPECIAL PURCHASE

LF 13508 JFET Analog Multi 8 bit	8.95
ICM 7045 Precision StopWatch	23.95
ICM 7205 CMOS LED Stopwatch/Timer	19.95
ICM 7207 Oscillator Controller	7.50
ICM 7208 Seven Decade Counter	18.95
ICM 7209 Clock Generator	6.95
ICL 7107 3½ Digit A/D (LED)	14.95
MC14433P 3½ Digit A/D Converter	13.95
ICL 8211 Voltage Reference	1.95
LM 1820N AM Radio	3/1.00
LM 1850N Ground Fault IC	3/1.00
LM 2900N Quad Amplifier	2/1.00
LM 2901N (HM) Quad Comparator	2/1.00
LM 2917N Freq. to Volt Conv.	2/1.99
AY-3-3550 4½ digit DMM	24.95
AY-5-3507 40MHz DVM	99.95
MEM 4963 Mostef Smoke Detector	11.95
27S08 32 x 8 Prom (IM 5600)	2.95
G115M 6 channel Mostet	1.49
ULN 2003A 7 channel Driver	.99
2101AL-4	1.95
MCM 14505 64 bit Static Ram	6.95
7520/25 .50	LM 377 1.25
1488/1489 . . 2/1.99	LM 387 1.25
MK5014 Calc. 3/1.99	LM 3302 3/1.99
74S89 . . 3/1.99	LM 4558 3/1.99
78H05K 6.95	RC 4136 2/1.99
LM323K 4.95	RC 4131 2/1.99
MC1372 8.95	COM 5027 39.95
MM5298-4A/B 2.95	COM 5037 49.95

VERBATIM DISKETTES

100% CERTIFIED ERROR-FREE!

- **35 TRACKS, DOUBLE DENSITY, SINGLE-SIDED 5¼**

TYPE	DESCRIPTION	PRICE/BOX 10
525-01	Soft Sectored TRS 80, etc.	$27.25
525-10	10 Hole Hard NS. Apple, etc.	27.25
525-16	16 Hole Hard, Micropolis	27.25

- **40 & 77 TRACK DOUBLE DENSITY – SINGLE SIDED 5¼" W/HUB REINFORCEMENT RING**

577-01	Soft Sectored, TRS 80, etc.	$32.25
577-10	10 Hole Hard NS. Apple, etc.	32.25
577-16	16 Hole Hard, Micropolis	32.25

- **40 TRACKS, DOUBLE SIDED, DOUBLE DENSITY 5¼**

550-01	Soft Sectored SA 450, MPI 52	$39.50
550-10	10 Hole Hard, BASF, WANGCO	39.50
550-16	16 Hole Hard, Micro³	39.50

- **8" 100% CERTIFIED DISKETTES**

FD800-01	Soft, Single Density, 3740	$33.50
FD800-32	32 Hard Single Density, Shug	33.50
FD802-01	Soft, Double Density, 3740	44.80
FD850-01	Soft, Double Sided, Double Density, 3740	49.80

VOLUME DEALER PRICING AVAILABLE
WE ALSO STOCK DYSAN-CALL

FLOPPY DISK I/O

1771-01 8" & Minifloppy	24.95
uPd372 Nec Floppy	49.95
1781 Dual Floppy	29.95
1791-01 Dual Floppy	36.95
uPd 765 Floppy	49.95

A/D CONVERTERS

8700 8 bit Binary	13.50
8701 10 bit Binary	22.00
8703 8 bit TS	13.50
9400 Volt to Freq. Conv.	7.25
8750 3½ Digit BCD	13.95
1408L6 6 bit	3.95
1408L8 8 bit	5.95
DAC01 D to A	5.95
DAC08	9.95

TV CHIPS/SOUND

AY38500-1 6 Games B/W	4.95
AY38515 Color Converter	2.95
AY38603-1 Roadrace Game	4.95
AY38605-1 Warfare Game	CALL
AY38606-1 Wipeout Game	9.50
AY38607-1 Shooting Gallery	8.95
AY38910 Sound Generator	12.95
SN76477 TI Sound Generator	3.95
MM5320/21 TV Synch Gen.	9.95
MM5369 Prescaler	3.95
LM1889 RF Modulator	3.95
MM5T100 NSC Color TV	6.95
MM57104 Clock Gen.	3.75
RF Modulator w/Audio	8.95
M&R Modulator	29.95

WAVEFORM GEN.

8038 Function Gen.	3.95
MC4024VCO	2.95
LM566 VCO	1.95
XR2206 Function Generator	5.25

SHIFT REGISTERS

MM500H Dual25	.50
MM5056N Dual 256	2.95
MM5060N Dual 128	2.95
2510A Dual 100	1.95
2847 Quad 80	4.95
3341 Dual 80	4.95
3351 40 x 9 FIFO	17.95
3357 Quad 80	6.95
9403 16 x 4 FIFO	24.95
9408 10 Bit Sequencer	9.95

CTS DIPSWITCHES

CTS206-2	1.75	CTS206-7	1.75
CTS206-4	1.75	CTS206-8	1.95
CTS206-5	1.75	CTS206-9	1.95
CTS206-6	1.75	CTS206-10	1.95

CONNECTORS (GOLD)

DB25P (RS232)	3.25
DB25S Female	3.75
Hood	1.25
Set w/Hood, Sale	$7.50
22/44 W/W, S/T, KIM	2.95
43/86 W/W, S/T, MOT	6.50
50/100 S-100 Connector w/w	4.95
50/100 S-100 Connector s/t	3.95

NAKED PC

Z-80 CPU (Ithaca)	$34.95
8080A CPU	34.95
8K Static RAM (Logos)	24.95
16K Static RAM (2114)	29.95
32K Static RAM (2114)	29.95
8K Eprom (2708)	24.95
1702 Eprom Board	30.00
2708/2716 Eprom (Ithaca)	34.95
2708/2716 Eprom (WMC)	30.00
Realtime Clock	34.95
ACP Proto Bd. (3M Conn.)	27.95
Vector 8800 Proto	22.20
Vector 8803 11 slot MB	39.95
ACP Extender w/Conn.	18.95
Video Interface (SSM)	31.95
Parallel Interface (SSM)	31.95
13 Slot MotherBoard (WMC)	32.95
9 Slot MotherBoard (WMC)	29.95
8 Slot Mother (expandable)	34.95
Proc-Tech Bare Boards	CALL
WMC Floppy PCB	34.95

COMPUTER SPECIALS

DISCOUNTS!

	LIST	SALE
Apple II Plus w/16K	1195.	990.
PET 2001-16N	995.	895.
Exidy Sorcerer w/16K	1099.	
Cromemco Sys III	6990.	6290.
Horizon I w/32K		CALL
Pascal Microengine	1995.	1595.
IPSI 1620 Diablo RO	3295.	2695.
Anadex DP 8000	995.	875.
Centronics Micro S-1	595.	525.
Soroc IQ 120	995.	795.
Teletype Model 43	1349.	1150.
HiPlot Plotter	1085.	899.
HiPlot Digitizer	795.	735.
Intertube II	895.	784.
Atari 800	999.	750.
Atari 400	549.	449.
TI 99/4	1150.	1025.
Leedex 12" Monitor	149.	139.
Centronics 737	995.	899.
Trencom 100	375.	349.
Trencom T-200	595.	525.
Sanyo 9" Monitor	220.	169.
Sanyo 15" Monitor	295.	249.
Mot 22 MHz Monitor	296.	219.

SOCKET SPECIALS

14 Pin w/w-2L	$ .35
18 Pin w/w-2L	.55
20 Pin w/w-2L	.75
40 Pin w/w-2L	1.45
18 Pin s/t	.15
22 Pin s/t	.15

Call for volume pricing.

TERMS: Use check, M/C, VISA, AMEX, CB, or COD. COD requires 25% deposit. Charge Orders please include expiration date. Foreign pay U.S. Funds. Order by phone, mail or TWX. MINIMUM $10.00. Please include magazine issue and phone no. SHIPPING: U.S.A. add $2.00 for first 2 lbs. For surface add 30¢ for additional lbs. For air add 70¢ for additional lbs. FOREIGN: Add 10% shipping and handling. COD's $1.85 extra. Not responsible for typos. Some items subject to prior sale. We reserve right to limit quantities, some items subject to precious metal adder. Retail pricing may vary from Mail Order. We reserve the right to substitute manufacturer.

RETAIL STORES OPEN MON-SAT

STORE #1	1310 "B" E. Edinger Santa Ana, CA 92705	STORE #2	674 El Camino Real Tustin, CA 92680
Showrooms, Retail, Warehouse		Specializing in Systems	


P.O. Box 17329 Irvine, Calif. 92713
Direct Order Lines: (714) 558-8813
(800) 854-8230 or (800) 854-8241

FOR INTERNATIONAL ORDERS:
1401 E. Borchard (714) 953-0604
Santa Ana, CA 92705 TWX: 910-595-1565

Circle 378 on inquiry card.

California Digital

Post Office Box 3097 B • Torrance, California 90503

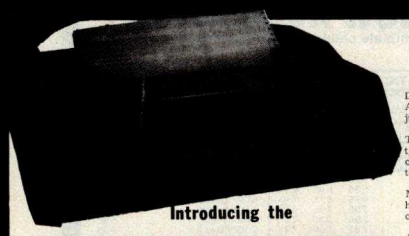

Introducing the

ANACOM 150

DOT MATRIX PRINTER

Mfg. suggested list $1350

California Digital Introductory Price

$995

Full 136 Characters for the price of 80

DURABILITY... is the key component of the new Anacom 150. No bells, no whistles, no problems, just consistent high quality output.

This nine wire dot matrix printer features a ballistic type print mechanism guaranteed for three million characters. Low count (16) integrated circuits add to the reliability of the printer.

Microprocessor controlled logic seeking bi-directional head allows the Anacom to print up to speeds of 150 characters per second. 136 columns wide.

Adjustable tractors and variable head gap permit the Anacom to accept fifteen inch wide multi-part forms.

Switch selectable: skip paper perforation. carriage return/line feed and six or eight lines per inch.

Lexan paper shield and enclosure sound proofing add to the overall quality of the printer.

The Anacom 150 is definitely the best value in todays extremely competitive world of micro-printers.

If you are in the market for a "Quality Engineered" dot matrix printer, please consider the Anacom 150 before purchasing a less reliable machine.

Available either RS-232 serial 9600 baud. PRA-150S or Centronic parallel PRA-150P. Field exchange. UPS shipping weight 40 pounds.

IBM 3101 DISPLAY TERMINAL

The new 3101 display terminal is the IBM entry into the plug compatable micro computer industry.

This modularly constructed CRT terminal has been engineered with the user in mind. The video display modules swivels and tilts to provide the operator with a comfortable viewing posture.

Twelve inch P-39 green phosphor screen boasts a crisp 7 by 14 character matrix.

Standard 80 by 24 line screen format with a 25th line to display machine status and aid in the diagnostics in the event of a system malfunction.

87 key Selectric style keyboard arrangement along with numeric entry pad. Eight user definable function keys.

The 3101 video terminal is RS232 compatable and displays all 128 ASCII characters including control codes.

Accessible customer setup switches aid in choosing such options as line speed, parity scroll, and reverse video.


But most of all, built into every 3101 terminal is the quality that you have learned to expect from the IBM Corporation. VDT-3101




IBM direct price $1295

CALIFORNIA DIGITAL discount price

$1195 immediate delivery






TEC V-300 Word Processing Daisy Wheel Printer

$1595

Finally a reasonably priced letter quality printer... Bi-directional printing at 25 characters per second. Full 136 print positions wide. Proportional spacing 1/120" horizontal, 1/48" vertical.
Uses standard Diablo brand interchangable daisy print wheels.
Intel 8085 CPU microprocessor controlled. Interfaces via Centronics parallel connector. Shipping 58 lbs. PRV-300.

NEC Spinwriter 5510P/S $2495



The word processing quality Spinwriter prints at speeds upto 55 characters per second. The Model 5510P/S is supplied with both parallel and RS-232 serial interfacing. Also included is the tractor feed mechanism, along with print thimble and ribbon. PRN-5510PS 70 lbs.
Keyboard (KSR) Model 5520 P/S available $2995. PRN-5520PS 75 lbs.



P-300

PRINTRONIX $4500

Forty-four separate print heads shuttle to provide overlapping dots. This unique feature allows a resolution of 60 dots per inch horizontal and 72 vertical.
The Printronix P-300 has the capability of outputing pictures, bar codes and large labels, a feature not provided with band or chain printers. PRP-300 200 lbs.


Anadex

$1395

PRX 9500



DP-9500



TI-810

$1495

List $1895
Save $400

CENTRONICS

730	$595
737	$795



Both the Centronics 730 and the 737 are capable of accepting standard office letterhead or pin feed continuous forms.
For higher resolution the 737 implements a nine wire dot matrix print head. Parallel interfacing. Add $65 for RS232. PRC-730P (S). PRC-737P (S) 17 lbs.



AMPEX DIALOGUE 80 CRT TERMINAL

$995

New from the Ampex Corporation. The Dialogue 80 features removable keyboard, displayable two pages (four optional) dual program keys, half intensity protected fields and status line. Transmits data either block, line or character mode. Excellent value. VDT-D80 shipping 47 lbs.



ADDS

Applied Digital Data Systems Inc.

REGENT 25 $850
80 character by 24 line twelve inch screen. 18 key numeric-entry cluster. Reverse video. Displayable control characters. VDT-R25 ship. 60 lbs.

REGENT 30 $950
Additional features. Special function keys. High resolution graphics. 25th status line. Multi-intensity screen. Superior quality keyboard. VDT-R30

REGENT 40 $1195
Insert/delete line feature. Eleven special graphic symbols. VDT-R40

REGENT 60 $1495
Buffered display. Block mode transmission. Protected fields. VDT-R60


HEWLETT PACKARD $2650



HP 85

The Hewlett Packard HP-85 is a complete, low cost portable computer system. This self contained package includes CPU, keyboard, printer, CRT display and cassette tape drive. SYS-HP85 30 lbs.

APPLE II $988






ATARI

800	$747
400	$695

LOBO Disk Drives




The package includes a durable steel enclosure, Power One brand disk power supply, muffin exhaust fan and all the necessary harnessing cables.
The Lobo package with:
One Shugart SA801R disk drive... $795
Two Shugart SA801R disk drives. $1195

S-100 BOARDS

Assembled • Tested • Burned-in





MEASUREMENT SYSTEMS	
Dynamic memory DMB-6400	$770
Dynamic memory DMB-3200	700
GODBOUT/COMPUPRO	
Dual 8088/8085 16 bit CPU	375
Z-80 CPU 24 bit address 4 MHz	239
Static RAM 32K (Alpha Micro)	575
Spectrum color graphics board	329
Interfacer II I/O board	199
SEATTLE COMPUTER PRODUCTS	
8086 16 bit CPU 2 card set/86 dos	595
CALIFORNIA COMPUTER SYSTEMS	
S-100 Mainframe 2200A	329
Disk controller/2.2 CPM 2422	329
Z-80 CPU 4 MHz DMA 2810A	250
DIGITAL RESEARCH	
32K 2716 EPROM board	99
EPROMS for above 2716 16 req.	13
CALIFORNIA DATA CORPORATION	
A/D board 16 channel 12 bits	
QT COMPUTER SYSTEMS	
Real time clock/calendar	135

MORROW/THINKER TOYS	
Multiboard "NEW" Daisy wheel port, real time clock, power on jump, program interrupt cont'l 3P/3S	$275
Switchboard interface 4P/2S	219
Disk Jockey I disk controller	195
Disk Jockey II double density	375
SD SALES	
PROM-100 programmer	229
Video display board 8024	395
Versafloppy 3740 controller	375
MULLEN PRODUCTS	
Extender board/Logic probe (kit)	49
Relay Opto/control board	145
D.C. HAYES PRODUCTS	
Micromodem S-100 FCC register	375
ARTEC ELECTRONICS	
Wire Wrap proto board WW/100	22
General Purpose proto GP/100	22
CALIFORNIA DIGITAL	
8086 CPU 4K on board static RAM	450

S-100 Mother Board $35


Quiet Buss™

8803-18
18 slot
IMSAI



The Quiet Buss from California Digital is quality engineered. No short cuts have been taken to produce this mother board. Active termination circuitry prevents noise and crosstalk. manufactured from extra heavy epoxy glass.

ACCESSORIES FOR THE APPLE COMPUTER



CALIFORNIA COMPUTER SYSTEMS	
Arithmetic Processor 7811 B/C	$319
Asynchronous serial interface 7710	129
Centronics Interface card 7728	95
12K PROM Module 7114	69
Calender/Clock, Bat. back-up 7424	99
Parallel Interface 7720A	99
Programable Timer 7740A	99
Analog/Digital converter 7470A	99
MICROSOFT PRODUCTS	
Apple to Z-80 CPU card	379
D.C. HAYES PRODUCTS	
Micromodem for Apple	319
COMPUTER STOP PRODUCTS	
Double Vision/80 Column Video	250
INTERACTIVE STRUCTURES	
16 Channel A/D card AIO/2	275

MOUNTAIN COMPUTER PRODUCTS	
Intro X-10 system for BSR	$239
Intro X-10 card only	165
16 channel AD/DA 8 bit	319
Apple Clock battery back-up	225
Supertalker SD200	245
ROM Plus with filter	165
ROM Writer/Programmer	149
APPLE BRAND PRODUCTS	
Apple Language card	450
Floppy disk with controller	560
Floppy disk without controller	495
Apple parallel interface	175
SSM MICROCOMPUTER	
Dual serial parallel interface AIO	149
SORRENTO VALLEY ASSOCIATES	
8" floppy controller (Pascal)	360

direct connect MODEM

Universal Data 103



Connects directly to the new modular phone jack. Fully powered from your existing telephone line. No need to locate external AC power. Crystal control prevents frequency drift. Direct connect feature eliminates loss of information due to carbon compression that is associated with acoustic modems.

$169

VISA

master charge

All merchandise sold by California Digital is premium grade.
Shipping: First five pounds $2.00; each additional add $.40
Foreign orders 10% shipping. Excess will be refunded.
California residents add 6% sales tax. COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a "Strong Dun & Bradstreet."
Warehouse: 15608 Inglewood Blvd. Visitors by appointment.

TOLL FREE ORDER LINE


(800) 421-5041

TECHNICAL & CALIFORNIA

(213) 679-9001

California Digital

Post Office Box 3097 B • Torrance, California 90503



NEW from INTEGRAL DATA 460 Paper Tiger

**** All the features of the 440 and more ****

The 460 uses a dot matrix character formation technique in which the placement of the dots overlap both horizontally and vertically to achieve a correspondence-quality printing.
The printer's nine-wire print head uses staggered needle rows to create the vertically overlapping dots. The head is driven bi-directionally under microprocessor control by a stepper motor driven mechanism with logic-seeking look ahead capability.
Standard "Two-K Byte" buffer allows the printer to accept the entire content of a 1,920-character CRT screen. Weight 27 lbs.
suggested list price $1,295. Calif. Digital price **$1,076**

S-100 POWER SUPPLY

Mfg. for California Digital by SIERRACIN **$59**



Designed for on board regulation. 8V./6A. ; ±16V./2A. Input:115/230VAC. 9x5x3" PWS-8A 4lbs.

Same as above but: 8V./20A; ±16V. 4A. 11x5x4" PWS-20A $95

TELETYPE® MODEL 43



4320 KEYBOARD

TTL	AAA	$ 950
RS232	AAK	1050
Friction ...	AAE	1100
103 Modem	AAB	1575

plus shipping

WESTERN UNION ENCLOSURE



These enclosures were manufactured for Western Union by Universal Technology. The exact purpose of the product is still a mystery but the enclosure is ideally suited for an S-100 motherboard with shielded power supply. Removable hood and plexiglas front make this enclosure an attractive home for any hobby product. New surplus in factory boxes supplied with three 22/44 edge connectors; DB 25S communications connector; six foot grounded power cord and more. Inside dimensions: 19" x 10 1/2" x 6 7/8". Shipping weight 8 lbs. **$24.95**


FREE PLASTIC LIBRARY CASE with purchase of each box of .... Memorex mini-diskettes. $5 value.

$27 BOX of TEN

10 Boxes $24.95
100 Boxes $22.25
forty track

DISKETTES

DB25




	each	10+
male	$2.50	2.25
female	3.25	3.05
hood-2p	1.25	.98
Centronic	6.95	

BCD Thumbwheel Switch 1.95



Ten Position
Mfg. by Digiswitch
1 7/8"high 1/2" wide


Edge Connectors



GOLD 100 PIN IMSAI/ALTAIR


Imsai solder .125x.250	$2.95	3/$ 7.50
Imsai w/w.125centers	$4.95	3/$13.00
Altair soldertail .140 row	$5.95	3/$15.00
SPECIALS		
22/44 Kim eyelet.156"	$1.95	3/$5.00
25/50 solder tab .156"	$1.09	3/$2.00
36/72 wide post w/w.156	$1.95	3/$5.00

Lear Seigler Inc. In Plant POCKET INTERCOM $14.95



Another one of our mystery products. Manufactured by the Lear Seigler Company. The pocket intercom is supplied in a deep drawn blue anodized aluminium enclosure. Excellent for those special projects which require a touch of elegance. LSI list price $145. Supplied with chrome pocket clip. 9V transistor battery required. Model 1105. New surplus. measures 3.5 x 2.75 x 1.125" SPC-LSI

IEE Projection Module



$9.95 set of three
$25

Voltage applied to one of the twelve discrete miniature incandescent #328 lamps causes the module to display the selected character. (+-0 thru 9). Users may substitute the character film and display pictures and symbols of their own choosing. Manufactured by Industrial Electronic engineers Inc. SPC-L 12 Used excellent cond. 24 lamp modules also avail.

Authorized Distributor
Scotch® Data Products



		10 Pak	50+
740-0	IBM soft format.	$39.00	$3.50
740/2	Double side soft	65.00	6.00
741-0	Double density	53.00	4.90
743-0	Double/Double	70.00	6.60
740-32	8" Hard sector	39.00	3.50
744-(0)(10)(16)	5 1/4"mini	39.00	3.50
Library case for any above;		Add $3.00	
834 A	Data Cassette	5.50	
DC100	Mini Cartridge	16.00	
DC300	Data Cartridge	20.00	
920( )	Disk Cartridge	89.00	

Shugart Associates SA800-R Floppy Disk Drive



$449.50

XEROX 800 WORD PROCESSING KEYBOARD ASCII ENCODED



This 77 key word processing keyboard was manufactured by Microswitch for use in the Xerox 800 word processing system.
The keyboard outputs a seven bit ASCII code along with an eighth bit that allows most keys to shift and double function as special characters. Extra large "Tab & Return" keys are designed into the layout of the keyboard to emulate the IBM Selectric. 17 illuminated keys serve for special word processing codes. The keyboard is equipped with two thumbwheel switches for defining line width.
Original Xerox acquisition over $400.00 California Digital USED price only $49.00 Excellent cond. Documentation included.

MEMORY

TRS-80 APPLE II $39
16k memory (8) 4116's



Installation is simple. Anyone who has ever changed a spark plug should be able to up-grade his microcomputer.
How can California Digital offer these memory up-grade sets at 25% below our competition? Simple, we buy in volume, wholesale to dealers and sell the balance directly to owners of personal microsystems. These 16K dynamic memory circuits are factory prime and unconditionally guaranteed for one full year. NOW, before you change your mind, pick up the telephone and order your up-grade memory from California Digital. Add $3 for TRS80 jumpers.


STATIC	1-31	32-99	100-5C	-999	1K+
21L02 450nS.	1.19	.99	.95	.90	.85
21L02 250nS.	1.49	1.39	1.25	*	*
2114 1Kx4 450	5.95	5.50	5.25	4.75	4.50
2114 1Kx4 300	8.95	8.50	8.00	*	*
4044 4Kx1 450	5.95	5.50	5.25	*	*
4044 4Kx1 250	9.95	9.50	9.00	*	*
4045 1Kx4 450	8.95	8.50	8.00	*	*
4045 1Kx4 250	9.95	9.50	9.00	*	*
5257 low pow.	5.95	5.50	5.00	4.80	4.60

DATA INPUT TERMINAL



This Keystation terminal was recently acquired from the CMC division of the Pertec Corporation. The unit was originally designed for inputing data directly onto magnetic tape.
The system is comprised of a premium cast aluminium and fiberglass enclosure, along with a Honeywell / Microswitch hall effect keyboard. Thirty display lamps advise the operator of the systems status. Four inch loud speaker acknowledges acceptance of data and alerts the operator of pending problems.
But most of all this "USED" terminal, with a little imagination, can be engineered to make the perfect home for an S-100 computer and video display; or with slight modification will accept the Rockwell AIM-65 micro/computer.
Five volt regulated power supply is available for an additional $20. (see June Byte) All units are in excellent condition. Original acquisition over $700. 22 lbs.

Scotch® DISKETTE HEAD CLEANING KIT $24.95



Please specify:
8" or 5 1/4"

MINIATURE SWITCHES



your choice
$.98

SPDT Miniature Toggles

7101 C&K	ON-NONE-ON
7107 jbt	ON-OFF(mnt.ON)
7108 CK	ON-(moment ON)
7103 CK	ON OFF ON
Rotary	3P-4-Pos.
Rotary	3P-6-Pos.
Push B (N.O.)	$.39ea. 4/$1

DIP Switch

$1.29 ea. 10 $1.19 25 1.09 100 .97 1K .83
specify 4 7 or 8 pos.
SPST

CONTROL DATA CRT Terminal?




Frankly we made a mistake and are offering these terminals below our cost just to get them out of our warehouse. As far as we can determine the units are complete. But we are offering them on an "as-is" basis without any return privileges.
The terminals were originally purchased from All State Insurance.
At present we have been unable to secure any printed information on the units. If you have any doubts, please do not purchase one of these terminals Shipped via truck. freight collect.

KEYBOARD $24.95




This classic Hytek keyboard is similar to the module used in the Decwriter Terminal. 62 non-encoded contacts. three locking. Factory boxed Altair surplus. Shipping 3 lbs.

2716 EPROM SALE $13



*** THOUSANDS ***
We have slashed price in an effort to reduce our over stocked inventory. These are Single Five Volt Eproms, manufactured by one of the Worlds largest producers of semiconductors.
Please phone for volume pricing.

IBM 2980 SELECTRIC BANK TERMINAL $250



The IBM 2980 terminal was designed to be located at each tellers station in a branch bank. The terminal was on line to a master computer. Information entered into the terminal would instantaneously adjust the customers account at the computer. A record of the transaction would be entered into the customers passbook and simultaneously recorded onto a continuous 40 column paper roll located within the terminal.
The heart of the 2980 is the IBM Selectric typewriter. Each unit is supplied with print ball, ribbon and full documentation.
A potential use for this I/O terminal is in business applications where information must be entered onto ledger cards at the same time data is recorded at the computer. USED surplus, 77 lbs.

BSR SYSTEM X-10

The new BSR timer runs your home like clockwork. Turns on lamps and appliances while your away from home.
Completely compatible with your existing system X-10 devices.





BSR Timer	$65.00
Master Console	34.95
Ultrasonic Controller	19.95
Modules: Appliance, Lamp or Wall Switch	13.95

VISA
master charge


All merchandise sold by California Digital is premium grade.
Shipping: First five pounds $2.00; each additional add $.40
Foreign orders 10% shipping. Excess will be refunded.
California residents add 6% sales tax. COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a "Strong Dun & Bradstreet."
Warehouse: 15608 Inglewood Blvd. Visitors by appointment.

TOLL FREE ORDER LINE
(800) 421-5041
TECHNICAL & CALIFORNIA
(213) 679-9001

Circle 379 on inquiry card.

Computers, Disk Systems

SUPERBRAIN®
By INTERTEC



32K or 64K (Double or Quad Density units available). Uses two Z-80 CPU's. Commercial-type terminal with 12" monitor. Dual double density minifloppies. Over 350 kilobytes of storage (twice that with quad density drives). Two serial RS232 ports, I/O ports standard. Expandable with optional S-100 S-100 interface. Comes with CP/M™ 2.2 operating system. MiniMicroMart includes BASIC interpreter and can supply a wide range of CP/M Development and Application software.

w/32K Double Density, List $2995 . **$2685**
w/64K Double Density, List $3345 . . . . . **$2883**
w/64K Quad Density, List $3995 . . . . . **$3595**
W/64K Quad — MiniMicroMart Upgrade Special. **$3395**

MICROMATION



A 64K complete computer with dual density 8" floppies (1 megabyte). Rack or vertical mounting. Systems with double-sided drives, hard disks, and multi-user (MP/M).

Z+ 100 64K RAM, Computer, $2495. . **$2099**
Z+120 Includes two 8" disks, $4995 . . . **$4199**

"Z" system features new distributed processing multi-user concept with one Z-80 per user, with Z-80 for MP/M (Master Satellite concept).

AS LOW AS $11,899!

SD SYSTEMS

SDS-100, w/32K RAM, $6995 . . . . . **$5945**
SDS-200, List $8995 . . . . . **$7645**

RADIO SHACK TRS-80™



10% OFF!

INTERSYSTEMS
formerly ITHACA AUDIO



DPS-1, List $1795

Call for Price!

The new Series II CPU Board features a 4 MHz Z-80A CPU and a full-feature front panel. 20-slot actively terminated motherboard, with 25 amp power supply (50/60 Hz operation, incl. 68 cfm fan).


COMPLETE SYSTEM with InterSystem 64K RAM, I/O Board w/priority interrupt and double density disk controller board. Full 1-year warranty, List $3595

Call for Price!

HEWLETT-PACKARD
HP-85A


Desk-Top Computer

Call for Price



MORROW
THINKER TOYS® DISCUS M26™

26 megabytes of formatted storage
List $4,995 **$4,199**

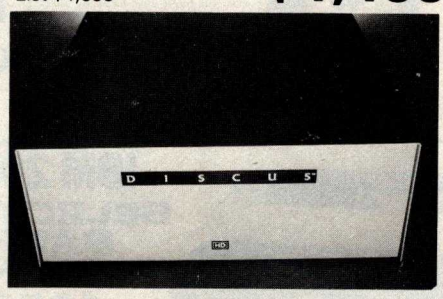

THINKER TOYS® DISK SYSTEMS

Now includes CP/M® 2.2

Discus 2D, List $1199. . . . . **$1019**
Discus 2D, dual-drive, List $1994 . . . . . **$1694**
Discus 2+2, Assem., List $1549. . . . . **$1319**
Dual Discus 2+2, Assem., $2748. . . . . **$2335**

All Morrow systems now include CP/M® 2.2

Circle 380 on inquiry card.

NORTH STAR MDS-A
Double Density Mini Floppy Disk System

Double Density, Kit
List $799 **OUR PRICE $669**
Assembled and Tested. **$719**
Quad Version, Kit, List. **$836**
Assembled, List $1099. . . . . **$896**


Above MDS-A units do not include cabinet or power supply.
Shipping and Insurance: Add $7.50.

NEW! CROMIX FROM CROMEMCO
A New UNIX Like Disk Operating System,

With true multi-user, multi-tasking capabilities
List $295 . . . . . **OUR PRICE $249**

NEW! DOUBLE DENSITY CONTROLLER BOARD FROM CROMEMCO

With built-in diagnostics
16 FDC Controller, List $595 **OUR PRICE $505**



NEW! CROMEMCO SYSTEM ZERO

List $995 . . . . . **OUR PRICE $849**

NEW! CROMEMCO SYSTEM ZERO/D

A complete 64K Computer with Double Density Disk Controller . . . . . List **$2995**

OUR PRICE $2545

Companion Disk drive for above — **Quad Density** — Total of 780 Kilobytes of storage on the two drives. . . . . **List $1295**


OUR PRICE $1099

Only **$3644** for a complete 64K Disk System

MORROW
Discus 2D's IN STOCK

Terminals and Printers!

TELEVIDEO TVI-912C

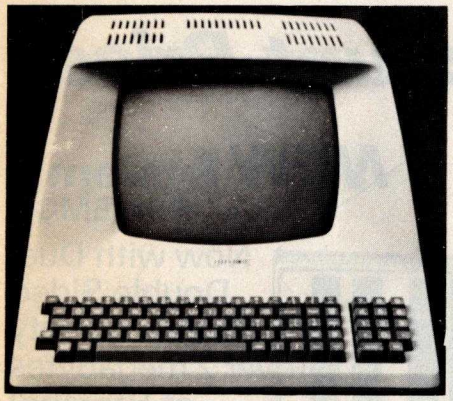

Upper and lower case, 15 baud rates: 75 to 19,000 baud, dual intensity, 24 x 80 character display, 12 x 10 resolution. Numeric pad. Programmable reversible video, auxiliary port, self-test mode, protect mode, block mode, tabbing, addressable cursor. Microprocessor controlled, programmable underline, line and character insert/delete. "C" version features typewriter-style keyboard. List $950

OUR PRICE $789

920C (with 11 function keys, 6 edit keys and 2 transmission mode keys, List $1030

ONLY $849

Intertec EMULATOR

Software compatible with a Soroc IQ-120, Hazeltine 1500, ADM-3A or DEC VT-52. Features block mode transmission and printer port; 12" anti-glare screen; 18-key numeric keypad; full cursor control. List $895

OUR PRICE $749



NEW INTERTUBE III

List $995 **ONLY $749**

12" display, 24 x 80 format, 18-key numeric keypad, 128 upper/lower case ASCII characters. Reverse video, blinking, complete cursor addressing and control. Special user-defined control function keys, protected and unprotected fields. Line insert/delete and character insert/delete editing, eleven special line drawing symbols.

SOROC



IQ-120

List $995

SPECIAL $729

IQ-140 List $1495
SPECIAL $1149

HAZELTINE

1500

ONLY $879



1410 w/numeric keypad, List $900 . . . . . **$749**
1420 w/lower case and numeric pad **849**
1510, List $1395 . . . . . **1089**
1520, List $1650 . . . . . **1389**

NEC SPINWRITER™




Terminal/Keyboard as well as RO Printer Only models available.

CALL FOR PRICES!

CENTRONICS PRINTERS


NEW 730, parallel, friction, tractor . . . **$679**
NEW 737 parallel, friction, tractor **$849**
779-2 w/tractor (same as TRS-80 Line Printer I), List $1350 . . . . . **1049**
702 120 cps, bi-direct., tractor, VFU **1995**
703 185 cps, bi-direct., tractor, VFU **2395**
704 RS232 serial version of 703, $2350 . . **$1995**

TI-810



TI-810 Basic Unit, $1895 . **ONLY $1695**
TI-810 w/full ASCII (Lower case), vertical forms control, and compressed print . **$1895**
TI-745 Complete printing terminal with acoustic coupler, List $1695 . . . . **$1399**

PAPER TIGER®

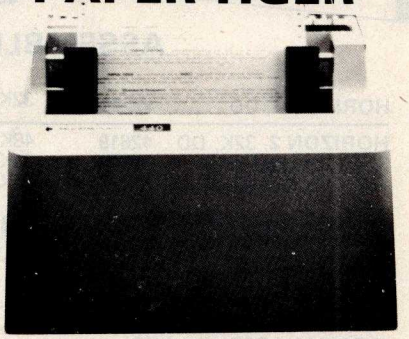

IDS-440 Paper Tiger, List $995 . **$895**
w/graphics option, incl. buffer, $1194 . . **$989**
TRS-80 cable **45**
NEW IDS PAPERTIGER 460 List $1295 . **$1149**
NEW IDS PAPERTIGER 460G List $1394 **$1199**

NEW IDS 460
QUALITY PRINTING AT MATRIX SPEED—LOGIC SEEKING PROPORTIONAL SPACING
w/auto text justification

ANADEX DP9500/DP9501 PRINTERS

DP-9500, List $1650 . . . . . **$1399**
DP-9501, List $1650 . . . . . **$1399**

OKIDATA Microline 80 ONLY $649

Tractor Feed Option **$99**
Serial interface **$89**

AXIOM IMP I **$699**
COMPRINT 912 w/parallel interf. **$559**
912 w/serial interface, List $699 . . . . . **$589**
MICROTEK, List $750 . . . . . **$675**
ANADEX 80-Col. Dot Matrix. **$849**

Above prices reflect a 2% cash discount (order prepaid prior to shipment). Add 2% to prices for credit card orders, C.O.D.'s, etc. Prices are f.o.b. shipping point. Prices are subject to change and offers subject to withdrawal without notice. **WRITE FOR FREE CATALOG.**

MiniMicroMart, Inc.

1618 James Street, Syracuse NY 13203 (315) 422-4467 TWX 710-541-0431

VISA


master charge

Circle 381 on inquiry card.

If North Star or Cromemco offer it . . .

WE HAVE IT!!

Immediate Delivery at Discount Prices

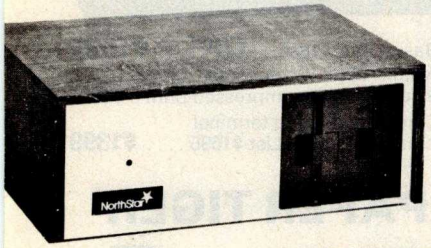

NORTH STAR Horizon® 2

32K Double Density
Assembled and Tested
List $3095

ONLY $2619

ASSEMBLED

HORIZON 1, DD **$2279**	32K, QD, List $2995 ..... **2539**
HORIZON 2, 32K, DD . **$2619**	48K, QD, List $4090 ..... **3469**
32K, QD, List $3595 ..... **3049**	64K, DD, List $3830 ..... **3239**
48K, DD, List $3590 ..... **3039**	64K, QD, List $4330 ..... **3669**

NORTH STAR APPLICATIONS SOFTWARE

(Exclusive for use with North Star Disk Systems — specify Double or Quad Density)

NORTHWORD, List $399 ..... **$339**
MAILMANAGER, List $299 ..... **249**
INFOMANAGER, List $499 ..... **419**
GENERALLEDGER, List $999 ..... **799**
ACCOUNTSRECEIVABLE, List $599 ..... **499**
ACCOUNTSPAYABLE, List $599 ..... **499**

NORTH STAR HARD DISK HD-18

18 megabytes, plugs into parallel port of North Star Horizon. Utilizes tried-and-proven 14" Century Data Marksman. List $4999.

OUR PRICE $4199

NORTH STAR MDS-A — Double (or Quad) Density Disk System, Kit, List $799 . **OUR PRICE $669**
Assembled and Tested, List $899 **SPECIAL $719**

NORTH STAR MEMORY BOARDS

16K Dynamic RAM (RAM-16-A/A), Assembled, List $499 ..... **$420**
Kit, List $449 ..... **SPECIAL $299**
32K (RAM-32/A), Assembled, List $739 ..... **$620**
Kit, List $669 ..... **ONLY $499**


INTRODUCTORY SPECIALS ON ...

PREMIUM QUALITY BASF DISKS
CERTIFIED FOR QUAD SYSTEMS

(Box of ten)

5¼" DOUBLE DENSITY DOUBLE SIDED List$57.50 ... **$38.95**
8" DOUBLE DENSITY DOUBLE SIDED List$75.00 .... **$47.49**

Shipping $2.50 — Free Shipping In Multiple Of Two Box's

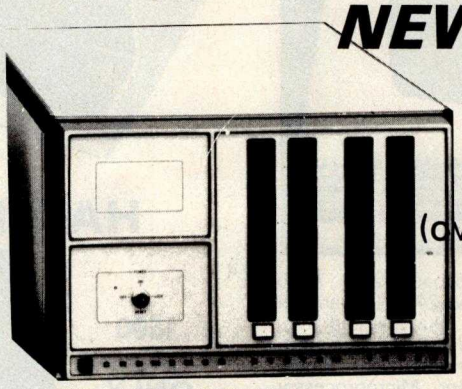

NEW System 3 by CROMEMCO

Now with Dual Double Sided Double Density (over 2 megabytes of Storage)
64K of RAM
List $7395

LIMITED TIME INTRODUCTORY SPECIAL $6199!

CROMEMCO SYSTEM 2 — Now double Density with Double Sided Drives, Quad Capacity mini floppy disc drives. List $3990 ..... **Only $3390**

CROMEMCO Z-2H



Full 11-megabyte Hard Disk system. Fast Z-80A 4 MHz processor, two floppy disk drives, 64K RAM memory, RS232 special interface, printer interface, and extensive software available.
List $9995

OUR PRICE $8489

NEW DOUBLE DENSITY CONTROLLER BOARD From Cromemco

With built-in diagnostics — 16 FDC Controller
List $595 ..... **OUR PRICE $505**

Z-2 COMPUTER SYSTEM List $995 ..... **$845**
SINGLE CARD COMPUTER — SCC-W 4 MHz. List $450 ..... **$382**
NEW COLOR GRAPHICS INTERFACE — SDI List $595 **OUR PRICE $505**
CROMEMCO HDD — 11/22-megabyte Hard Disk for use with existing systems. DMA controller. Transfer rate of 5.6 megabytes/second.
HDD-11, List $6995 ..... **OUR PRICE ONLY $5939**
HDD-22, List $11,995 ..... **$10,189**

SHIPPING AND INSURANCE: Add $15 or Horizons, $2.50 for Boards and Software. Hard Disk Systems and Cromemco systems shipped freight collect. Advertised prices are for prepaid orders. Credit card and C.O.D. 2% higher. Deposit may be required on C.O.D. All prices subject to change and offers subject to withdrawal without notice.

— WRITE FOR FREE CATALOG —

MiniMicroMart, Inc.

1618 James Street, Syracuse, NY 13203 (315) 422-4467 TWX 710-541-0431


master charge THE INTERBANK CARD

VISA

Circle 382 on inquiry card.

Try to beat our prices!

SUPERBRAIN by Intertec

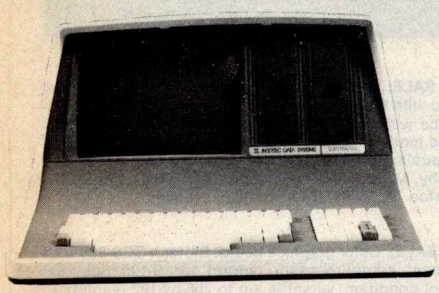

Self-contained computer with dual disks and two RS232C ports. Complete with CP/M® 2.2 and BASIC.

32K Double Density, List $2995 . **$2685**

64K Double Density, List $3345 ..... **$2883**

64K MiniMicroMart-upgraded to Quad Density ..... ***SPECIAL $3395***

VIDEO TERMINALS

***NEW* EMULATOR (Intertec)**, List $895 **$ 749**
NEW INTERTUBE III List $895 ... **ONLY $ 749**
SOROC 120, List $995 ..... ***SPECIAL $ 729***
1Q140, List $1495 ..... ***SPECIAL $1149***
PERKIN-ELMER 550, List $997 ..... **$ 799**
with anti-glare screen, $1027 ..... **$ 829**
HAZELTINE 1410, List $900 ..... **$ 749**
1420 ..... **$ 849**
1500, List $1225 ..... **$ 879**
1510, List $1395 ..... **$1089**
1520, List $1650 ..... **$1389**
ADDS R-20, List $995 ..... **$ 945**
LEAR SIEGLER ADM3A, Assembled .. **$ 849**
TELEVIDEO 912C, List $950 ..... **$ 789**
920C, List $1030 ..... **$ 849**

PRINTERS

ANADEX DP-8000 ..... **$ 849**
DP-9500, List $1650 ..... **$1399**
DP-9501, List $1650 ..... **$1399**
PAPER TIGER IDS-440, List $995 .... **$ 895**
w/graphics op., incl. buffer, $1195 ... **$ 989**
NEW IDS PAPERTIGER 460 . List 1295 **$1149**
NEW IDS PAPERTIGER 460G List $1394 **$1199**
NEC Spinwriters ..... **Call for Price**
TELETYPE 43 KSR **$1087**
CENTRONICS
730-1 parallel interface .... ***NEW LOW $679***
737 parallel interface .. ***SUPER VALUE $849***
779 w/Tractor, List $1350 ..... **$1049**
702 w/Tractor, VFU, List $2480 ..... **$1995**
703 w/Tractor, VFU, List $2975 ..... **$2395**
704 w/Tractor, VFU, List $2350 ..... **$1995**
TI 810 Basic, List $1895 ..... **$1695**
810/serial & Centronics-style parallel interface, List $1940 ..... **$1735**
810 w/full ASCII (U/LC), Vertical Forms Control, Compressed Print .. **$1895**
TI 820 KSR, List $2165 ..... **$1895**
TI 745 w/full ASCII, List $1695 ..... **$1399**
COMPRINT 912 w/parallel interface .. **$ 559**
912 w/serial interface, List $699 ..... **$ 589**
AXIOM IMP I ..... **$ 699**
MICROTEK, List $750 ..... **$ 675**
OKIDATA Microline 80, List $949 ..... **649**
Tractor Feed Option ..... **$ 99**
RS232 Serial Interface ..... **$ 89**

NORTH STAR HORIZON®

HORIZON 1 ASSEMBLED & TESTED

32K, Double Density, List $2695 .... **$2279**
32K, Quad Density, List $2995 ..... **$2539**

HORIZON 2 ASSEMBLED & TESTED

32K, Double Density, List $3095 ..... **$2619**
32K, Quad Density, List $3595 ..... **$3049**
48K, Double Density, List $3590 ..... **$3039**
48K, Quad Density, List $4090 ..... **$3469**
64K, Double Density, List $3830 ..... **$3239**
64K, Quad Density, List $4330 ..... **$3669**

LIMITED QUANTITY OF HORIZON 2 KITS AVAILABLE

FLOPPY DISK SYSTEMS

NORTH STAR MDS-A
Assembled, List $899 ..... ***SPECIAL $ 719***
Kit Version, List $799 ..... **$ 669**
MORROW THINKER TOYS® Discus 2D,
List $1199 ..... **OUR PRICE $1019***
Discus 2D, dual-drive, List $1994 ..... **$1694***
Discus 2+2, A&T, List $1549 ..... **$1319***
Dual Discus 2+2, A&T, List $2748 ... **$2335***
*Now includes CP/M® 2.2
MICROMATION Megabox, DD w/
8" drives, 1-megabyte, List $2295 ..... **$1949**
2-megabyte, List $3095 ..... **$2629**
MICROPOLIS 1041 MacroFloppy™
w/enclosure (no P.S.), List $695 ..... **$ 625**
1042 MacroFloppy w/case & AC P.S. . **$ 709**
1053 Dual MetaFloppy™, List $1895 ... **$1695**

VIDEO BOARDS

I/O Mapped
SD COMPUTER VDB-8024, kit, List $370 **$319†**
Assembled, List $470 ..... **$ 399†**
XITEX SCT-100K, Kit ..... **ONLY $154.95**
SCT-100A Assembled **$174.95**
SSM VB2 I/O, Kit, List $199 ..... **Call**
Assembled & Tested, List $269 .... **Call**
Memory Mapped
SSM VB1C, 16x64, Kit, List $179
Assembled & Tested, List $242
SSM VB3, 80-Char., 4MHz, Kit, List $48[illegible] **Call**
4 MHz, A&T, List $565 ..... **Call**
INTERSYSTEMS, 16x64, A&T, List $165 **$149**

ESCON CONVERSION FOR IBM SELECTRIC

Complete w/microprocessor controller and power supply. Factory built. User installs solenoid assembly or it can be done at Escon factory at nominal cost.

Parallel (TRS-80, Sorcerer, etc.), $575 **$514**
RS232 Standard Serial, List $599 ..... **534**
IEEE-488 (for PET), List $660 ..... **584**
TRS-80 Cable **25**

CALIFORNIA COMPUTER SYSTEMS

280 CPU BOARDS List $299 ..... **$269**
DISK CONTROLLER 2422 List $399 .... **$359**
32 CASE STATIC List $710 ..... **$599**
64K DYNAMIC BOARD List $699 ..... **$589**

CPU BOARDS

(assembled unless noted)

NORTH STAR Z80A (ZPB-A/A), $299 **$254**
CROMEMCO 4 MHz (ZPU-W), List $395 **$335**
4 MHz (SCC-W), List $450 ..... **$382**
INTERSYSTEMS (formerly Ithaca Audio)
new Series II Z-80, 4 MHz, List $395 ... **$349**
SSM CB1 8080 A&T, List $252 .....
CB1A Kit, List $183 .....
CB2 Z-80, A&T, List $344 .....
CB2 Kit, List $260 .....
DELTA Z-80, with I/O **$289**
SD SBC-100, List $350 ..... **$298**
SBC-100 Kit, List $295 ..... **$250**
SBC-200, List $400 ..... **$332**
SBC-200 Kit, List $320 ..... **$272**

MEMORY BOARDS

32K SD ExpandoRAM Kit
ONLY $249†
ONLY $159 without RAM chips

NORTH STAR 16K Dynamic RAM Board,
A&T (RAM-16-A/A), List $499 ..... **$420**
16K Kit Version, List $449 ... **SPECIAL $299**
32K A&T (RAM-32/A), List $739 ..... **$620**
32K Kit, List $669 ..... **SPECIAL $499**
CROMEMCO 16KZ-W, List $495 ..... **$419**
64KZ-W, List $1795 ..... **1485**
MEASUREMENT SYSTEMS & CONTROLS
(Guaranteed performance, incl. labor/parts 1 yr)
DM6400 64K Board w/all 64K, $795 ... **$659**
DM4800 with 48K, List $695 ..... **$589**
DM3200 with 32K, List $595 ..... **$509**
DMB6400 64K Board w/all 64K **$859**
DMB4800 with 48K **$789**
MORROW SuperRAM — all static, all A&T
16K, 4 MHz or 2 MHz, List $349 ..... **$299**
32K, 4 MHz, List $699 ..... **$629**
16K Memory Master, List $399 ..... **$339**
24K Memory Master, List $549 ..... **$465**
INTERSYSTEMS (formerly Ithaca Audio)
8K Static 2 MHz, A&T, List $165 ..... **$149**
8K Static 4 MHz, A&T, List $195 ..... **$176**
16K Static 2 MHz, A&T, List $475 ..... **$427**
16K Static 4 MHz, A&T, List $495 ..... **$445**
64K Dynamic, List $995 ..... **$895**
CALIFORNIA COMPUTER
16K Static, A&T, List $349.95 ..... **$259**

FLOPPY DISK CONTROLLER BOARDS

NORTH STAR, DD,
Assembled, List $499 ..... **$399**
MORROW Disk Jockey 1, A&T ($213) . **$189**
Disk Jockey 2D, A&T, List $479 ..... **$429**
SD Versafloppy I, Kit, List $250 ..... **$212†**
Versafloppy II, DD Kit, List $350 ..... **$297†**
Versafloppy II, DD, A&T, List $430 .... **$365†**
DELTA double density A&T ($385) **$345**
CONDUCTOR, double density A&T ... **$269**
INTERSYSTEMS FDC-2, A&T, $495 ... **$439**
MICROMATION Doubler, DD, A&T ... **$399**
TARBELL Floppy Disk Interface Kit **$199**
double density, A&T, List $495 ..... **$444**

NEW CROMEMCO DOUBLE DENSITY DISK CONTROLLER

List $595 ..... **OUR PRICE $505**

SHIPPING AND INSURANCE: Add $2.50 for boards, $6 for Selectric Converter or Floppy Disk Drives, $7.50 for Floppy Disk Systems, $15 for Horizon. SHIPPED FREIGHT COLLECT: SuperBrain, Centronics and T.I. printers. Contact us for shipping information on other terminals and printers.

Above prices reflect a 2% cash discount (order prepaid prior to shipment). Add 2% to prices for credit card orders, C.O.D.'s, etc. Prices are subject to change and offers subject to withdrawal without notice.

— WRITE FOR FREE CATALOG —

MiniMicroMart, Inc.

1618 James Street, Syracuse NY 13203 (315) 422-4467 TWX 710-541-0431

Circle 383 on inquiry card.

Unclassified Ads

FOR SALE: TRS-80 Model I Level 2, 48 K memory, expansion interface, two disk drives, Emako-20 matrix printer with Centronics cable. Sell all or part at 80% Radio Shack list price. Also diskettes, game cassettes, etc. Philip Crawford, 1720 E 1st St #10, Long Beach CA 90802, (213) 437-5475.

EDUCATORS: Small private school in central Connecticut (K-8) is considering implementation of microcomputers into curriculum. If you've previously experienced such an endeavor in this age group and would be willing to share an evening enlightening faculty and concerned parents, please contact us. We're eager to make this a successful program, and would be interested in learning how your program was launched and pitfalls to avoid. The Independent Day School, Laurel Brook Rd, Middlefield CT 06455, Attn: William Murdoch, (203) 238-3994.

FOR SALE: Voltage regulator, SOLA BASIC 750 VA Unit #63-13-175. Never used, output two outlets, 6.25 A maximum. $300, shipping additional. Jane Groene, 1 Harmony Ct, Syosset NY 11791, (516) 921-4900.

WANTED: KIM-1 or similar microcomputer for dedicated real-time system. Must be like KIM-1: easily expandable but otherwise a bare single-board system. Needed for temperature monitoring system in a solar greenhouse. Robert Heller, Star Route Box 51A, Wendell MA 01379, (617) 544-6416 between 8:30 and 5.

FOR SALE: Standard Memories Ecom memory system including Ecom memory core (32 K), heavy-duty power supply, all interconnecting cables, interface firmware card, and documentation. Original cost of $3500; will sell for $1000. All in excellent condition, both main units are for relay rack mounting. Steve Garber, 3030 Polk St, San Francisco CA 94109, (415) 474-7081.

FOR SALE: Eaton LRC 7000 plus 64-character printer; $250. Radio Shack Quick Printer II 32-character (Catalog #26-1155); $150. Send certified check or money order. William R Spencer Jr, 5421 Grandin Rd Ext, Salem VA 24153.

FOR SALE: LSI-11 processor (KD11-F) mounted in a four-slot backplane with a serial interface (DLV11), paper-tape operating-system package including PAL-11S Assembler, LINK-11S, ODT, PTSP, and single-user BASIC, with full documentation. Entire system never used, in mint condition. Original cost $1325, asking $1000. Also for sale, Processor Technology VDM-1, $100. M Wallin, 1607 Lauren Ct, Bensalem PA 19020.

FOR SALE: Hazeltine 1500 CRT terminal (less case, cable, XFMR); $450, Anderson Jacobson acoustic coupler #242A; $120, full ASCII keyboard; $50. S Gladstone, 150 W Cedar St #6, Norwalk CT 06854, (203) 866-8930.

WANTED: Soft black leather case for the HP-45, 65, or 67. New or used. E King, 870 W 181 St, New York NY 10033, (212) 568-3309.

FOR SALE: Ithaca Audio 8 K, 250 ns static programmable-memory board for S-100 with protect; $120. Ithaca Audio S-100 video-display board, 64-by-16 uppercase and lowercase with Greek symbols, normal or reverse video, 1 K on-board programmable memory; $75. Mostek 4115N dynamic-programmable memories; eight for $30. Ted Betz, Box 379A RD#1, Farmingdale NJ 07727, (201) 938-3722.


FOR SALE: DEC LSI-11 components: KD11-F processor board with FIS circuit and 4 K memory; DLV11 serial interface with remote data-rate switch. Also, Vadic two-speed modem: Bell 103/113 (300 bps) and 202 (1200 bps half-duplex) compatible. Sell both for half price. Bob Malahy, Mechanical Engineering Dept, Rice University, Houston TX 77001, (713) 664-8635 evenings.

FOR SALE: Color graphics board. Biotech CGS-808 with on-board microprocessor control for S-100 bus. Excellent condition, versatile, up to 256-by-192 resolution. Lots of software including 3D graphics. $362 postpaid. John Peterson, 1820 Camino Dr, Forest Grove OR 97116, (503) 357-6310.

FOR SALE: Apple II computer with 36 K memory, Applesoft Firmware Card, disk drive with controller, all manuals, plus extras. Everything is in excellent condition. $1200 or best offer. David J Bauman, 249 Taft St, Wind Gap PA 18091, (215) 863-5736.

WANTED: S-100 system: Z80 processor, 48 thru 64 K programmable memory, 15-slot mainframe, 5 V at 15 A, ± 18 V at 1 A power supply, video-display board, serial and parallel I/O. Optional: keyboard, cassette interface, and read-only memory monitor. Fred Tydeman, 3901 Northfield Rd, Austin TX 78759, (512) 255-9292 evenings.

FOR SALE: New PP 2708/16 eprom programmer by Oliver Audio Engineering, factory assembled; $200. Double-sided printed-circuit board plated through with schematic for building small system using Motorola MC14500 single-bit controller; $35 each. Charles Krasny, POB 57, Maple Falls WA 98266.

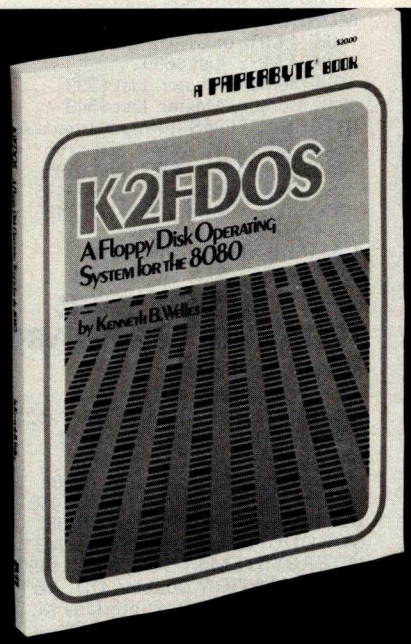

A New Floppy Disk System for the 8080.

Small (4K), but powerful!

K2FDOS is a complete software package. It includes all the specific routines necessary to bootstrap and run a powerful floppy disk operating system on an 8080 based microcomputer. K2FDOS features assembly language source code listings and object code in hexadecimal listings and machine-readable (PAPERBYTE®) bar code format.

McGraw Hill

This and other Byte/McGraw-Hill books are available from Byte Books or your local computer store.

ISBN #0-07-069206-8
Price $20.00

Please send ☐ _____ copies of
K2FDOS A Floppy Disk Operating System for the 8080

Name Title Company

Street City State/Province Code

☐ Check enclosed in the amount of $_____
☐ Bill Visa ☐ Bill Master Charge
Card No. _____ Exp. Date _____
Add 75¢ per book to cover postage and handling.
Please remit in U.S. funds or draw on a U.S. Bank

Available in October

70 Main Street, Peterborough, N.H. 03458

BYTE BOOKS

UNCLASSIFIED POLICY: *Readers who are soliciting or giving advice, or who have equipment to buy, sell or swap should send in a clearly typed notice to that effect. To be considered for publication, an advertisement must be clearly noncommercial, typed double spaced on plain white paper, contain 75 words or less, and include complete name and address information.*

These notices are free of charge and will be printed one time only on a space available basis. Notices can be accepted from individuals or bona fide computer users clubs only. We can engage in no correspondence on these and your confirmation of placement is appearance in an issue of BYTE.

Please note that it may take three or four months for an ad to appear in the magazine.

FOR SALE: SwTPC 6800 computer with 12 K memory, CT-64 with Motorola monitor, 2 serial and 1 parallel interface, AC-30 cassette interface, GT-6144 graphics board—all working. Cost over $1200; sell for $600. Also, OSI Challenger with 16 K, cassette interface, video board, extra boards. Cost over $1400; sell for $700. J Chirigos, 4707 Larchmont NE, Albuquerque NM 87111, (505) 299-0378 after 5 PM.

FOR SALE: 64-word S-100 Model 50 Heuristics Speechlab; $50, Morrow Speakeasy S-100 1P, 1S, and cassette interface; $30, OAE paper-tape reader; $20. All work fine. Micro-Term ACT-1 terminal, as is; $30. Alex Begin, 7335 Deep Run, Birmingham MI 48010, (313) 642-7512.

WANTED: Three to six 8080 hackers to work with machine-language Monitor, Editor, and Assembler that I have developed. You will get free software in exchange for user comments and suggestions. First letter should give programming experience, computer type, and input format required. Robert G Durnal, POB 68, Junior WV 26275.

FOR SALE: Radio Shack 16 K Level II TRS-80 microcomputer. With numeric keypad, expansion interface, cassette recorder, and several game cassettes including *Microchess*. List price is $1200. I will sell for $750. First cashier's check/money order takes it (I pay shipping). Include SASE for confirmation. Chris Willson, 8726 S Sepulveda Apt 91B, Westchester CA 90045.

FOR SALE: Xitan Z80 system. Mainframe, ZPU, SMB, VDB, 48 K programmable memory, 16 K read-only memory (12 K BASIC in read-only memory), keyboard, manuals, software. Complete system $1800. Terry Young, 4 Aiken St, Derry NH 03038, (603) 434-0257.

FOR SALE OR SWAP: KSR-28 Teletype (not ASCII, uses 5-bit code) with manuals. $100 or will swap for an acoustic coupler, modem, or Radio Shack Voxbox. R L Reynolds, 30 Jordan St, Chelmsford MA 01863, (617) 251-8505.

NEEDED: Information, kit, schematics, or advice on turning ITEL word-processor typewriter Model 84101010 into computer terminal or printer. Gordon Dohle, 414-34 Kleisinger Cr, Regina Saskatchewan, S4R 7M4 Canada.

FOR SALE: IMSAI mainframe with 10-slot motherboard, Ithaca Audio Z80 processor board (with 2708), SSM VB1 video board, 32 K static-programmable memory, and Soroc 117-key professional keyboard. Best offer over $600. Bob Watson, (602) 526-2312.

WANTED: Student experimenter wants integrated circuits, transistors, capacitors, resistors, LEDs, books, catalogs, magazines, diodes, switches, tubes, wire, printed-circuit boards, knobs, TTL circuits, keyboards, crystals, transformers, and parts-identification book. Please state price and what you have to offer in full detail. Judy Stapleton, POB 536, Pine Lake GA 30072.

FOR SALE: IMSAI 8080 with 16 K bytes, 3 P plus S Teletype I/O board, Tarbell cassette interface, case, panel, and 22-slot motherboard. 8 K BASIC and all standard software. Panasonic cassette unit. Perfect condition. $600 plus shipping, or best offer. Also available: ASR33 teletypewriter. Dick Aronson, 61 Morton St, New York NY 10014, (212) 243-0623 home, (212) 758-6500 work.

WANTED: Clever machines and ideas do not always advance the state of the art, but they are fascinating! Do you have or know about any unusual computing devices (mechanical, electronic, analog, digital, unclassifiable)? I am seeking information about such things, historical or recent, completed or not—even just crazy, ingenious ideas. I am also buying unusual machines, books, manuals, and documentation, and am building models of some of the machines. Dick Rubinstein, 15 Maugus Ave, Wellesley Hills MA 02181.

FOR SALE: Radio Shack TRS-80 Model I Level II. Equipped with 36 K programmable memory, 10-key pad, expansion interface. Unit is barely used, has been factory serviced, and can handle additional 16 K programmable memory. $1000. Also, IBM Selectric Model 71-3 I/O device with TRS-80 printer-port interface. Gives letter-quality hard copy. $650. Take both for $1400. Doug Bowie, POB 3453, San Francisco CA 91449, (415) 861-6883.

FOR SALE: Diablo Hytype 1 Model 1200. Best of the daisy-wheel printers. Brand-new unit with in-feed friction platen and print wheel. Interface for Apple, TRS-80, and CP/M systems. Maintenance manual and additional interface information available. Scott Priester, 211 White Water Ct, Greer SC 29651, (803) 268-0678 after 6 PM.

FOR SALE: HP-41C calculator, card reader, two memory modules, and all manuals for $425. All components essentially new. The system was replaced by an HP-85 before all HP-41C components were received. Ernest W Graham, POB 396, Shaw Island WA 98286.

FOR SALE: Fairchild PEP 3870 development board. In circuit emulation of 3870 series single-chip microcomputers. Programs 38E70 and 2716 PROM. Never used. Paid $450; asking $350. Ron Sutherland, POB 1147, Lawrence KS 66044, (913) 841-9433.

FOR SALE: Expandor Black Box printer, 80-column, for connection to parallel port. Includes cable for connection to TRS-80 and maintenance manual with schematics. Cost over $350 two years ago. Needs some attention, but otherwise in good condition. $150 including UPS freight. Gary Taylor, Princeton Plasma Physics Laboratory, POB 451, Princeton NJ 08544, (609) 683-2573.

BOMB

BYTE's Ongoing Monitor Box

Article #	Page	Article	Author(s)
1	22	The Future of Computer Graphics	Brown and Levine
2	32	Home In on the Range! An Ultrasonic Ranging System	Ciarcia
3	64	Micrograph, Part 1: Developing an Instruction Set for a Raster-Scan Display	Booch
4	90	Language Control Structures for Easy Electronic Visualization	DeFanti
5	126	Graphic Color Slides, Part 1	Grogono
6	148	Three-Dimensional Graphics for the Apple II	Sokol and Shepard
7	180	A Simplified Theory of Video Graphics, Part 1	Watson
8	206	Getting to Know Your Monitor	Dalpiaz
9	220	Digital Storage of Images	Williams
10	244	Machine Problem Solving, Part 3: The Alpha-Beta Procedure	Frey
11	296	A General Interpolating Graphics Package for the TRS-80	Cohen and Crowe
12	340	An 8088 Processor for the S-100 Bus, Part 3	Cantrell
13	361	Add Macro Expansion to Your Microcomputer, Part 2	Brown

FORTH Is First

John James' introductory article on FORTH won the BOMB first place in our fourth annual August language issue. Steve Ciarcia came in second with his construction article about a homemade modem for under $50. Kim Harris' unique article, "FORTH Extensibility," ran a close third. The BOMB cards for this month were unusually enthusiastic in their rating of individual articles, affirming the overall positive reaction to this issue. Several BOMB cards expressed support for the article on Khachiyan's algorithm. First place for August was 1.70 standard deviations above the mean, followed by second place at 0.95.■

Reader Service

*To get further information on the products advertising in BYTE, fill out the reader service card with you name and address. Then circle the appropriate numbers for the advertisers you select from the list. Add a 15-cent stamp to the card, then drop it in the mail. Not only do you gain information, but our advertisers are encouraged to use the marketplace provided by BYTE. This helps us bring you a bigger BYTE. *Correspond directly with company.*

Inquiry No. Page No.

332 AB Computers 395
262 ABM Products 335
72 Ackerman Digital 118
349 Ackerman Digital 404
123 AEI 201
288 Adaptive Data & Energy Sys 380
317 Addison-Wesley Pub Co 386
346 Addmaster 404
378 Advanced Comp Prod 422, 423
307 Alpha Omega Comp Sys 384
363 Alpha Omega Systems 406
150 Am Comp & Telecom Corp 235
387 Am Micro Prod Inc 364
144 American Square Comp 228
333 Ancrona 396
196 Anderson Jacobson 299
107 APF Electronics 178, 179
99 Apparat Inc 163
6 Apple Computer 12, 13
63 Applied Dig Data Sys 103
283 Applied Logic Inc 380
217 Arizona Comp Systems 309
3 Artec Electronics 6
311 ASAP 385
15 Atari Personal Computers 27
* ATV Research 382
123 Automated Equip Inc 201
* Autometrics 380
81 Axiom 129
28 base 2 inc 49
331 Beckian 394
240 John Bell Engineering 323
* Beta Comp Devices 216, 388
354 Bishop Management Co Ltd 408
* Bit 3 Computer Corp 327
302 Bit Bucket 384
165 Bower-Stewart & Assoc 256
151 Buss/Charles Floto 236
* BYTE Back Issues 337
* BYTE Books 146, 261, 430
214 BYTES & FLIGHTS 307
* BYTE Subscriber 339
* BYTE WATS 341
265 C & S Electronics 337
249 Cado Systems 330
13 Calif Comp Systems 20, 21
285 Calif Data Corp 380
379 California Digital 424, 425
276 Cambridge Develop Labs 362
293 CCM Inc 382
310 CCS Inc 384
87 Centronics 139
247 CFR Assoc Inc 327
141 Chrislin Industries 225
111 Circle Comp Sales 184
126 CI Con Comp & Comp 204, 205
374 CompuMart 414, 415
244 Computer Age Inc 325
187 Computer Case Co 291
215 Comp Discount of Am 308
* Computer Factory 237
69 Comp Furniture & Access 112
75 Computer Instant Ads 122
148 Computer Marketing Corp 233
348 Computer Shopper 404
321 Computer Specialties 387
73 Computers R Us 119
91 Computers R Us 145
105 Computers R Us 175
326 Computers R Us 391
301 The Computer Stop 383
49 Computers Wholesale 82
11 Computer Technology Assoc 18
328 Comp Trans Sys Inc 392
231 Computer Warehouse 318
362 Computer Warehouse 406
16 Computex 28
279 COMPUTIME 368
83 Compuview Products Inc 133
235 Condor Computer Corp 320
334 Concord Comp Components 396
211 Conn microCOMPUTER 307
212 Conn microCOMPUTER 307
149 Coosol 234
238 Coosol 321
162 The Cornsoft Group 252
31 Corvus Systems 53
361 The CPU Shop 407
308 Creative Mind Businesses 384
275 Creative Software 359
1 Cromemco 1, 2
* Cybernetics Inc 243
320 Cybertech 386
255 DAR Sales 332
* Data Discount Center 74
178 Datadisk Systems 278
223 Datasouth Computer Corp 314
97 Decision Master 161
376 Delta Products 418, 419
345 Des & Build Info Serv 404
155 DG Electronics 243
139 Diablo (Div of Xerox) 223
250 Digiac Corp 331
224 Digital Graphic Systems 315
154 Digital Marketing 241
164 Digital Research (CA) 255
341 Digital Research Computers 401
130 DIP Inc 211
199 The Disc Software Group 300
225 Disk/3 Mart Inc 315
140 Dual Systems Control Corp 224
156 Dynacomp Inc 245
299 Dyn Microproc Assoc 365
* Dysan Corp 60, 61
392 Eaton Corp 186
268 Ecosoft 339
338 Electrolabs 399
46 Electronic Control Tech 78
* Electronic Design Assoc 311
295 Electronic Music Systems 382
158 Electronics Book Club 247
194 Electronic Specialists 297
390 Electronic Systems 402, 403
207 Electronic Sys Furniture Co 304
221 Ellis Computing 311
93 Epson 149
114 Essex Publishing 189
42 Exatron Inc 75
209 Excom 305
134 Executive Business Sys 215
4 Factory Direct 10
343 Faragher & Assoc 404
243 Farnsworth Comp Center 325
306 Feith Software 384
322 Fordham Radio Supply 388
228 Futureworld 317
319 General Systems Consulting 386
300 Gimix 382
137 Godbout Electronics 218, 219
274 Mark Gordon Computers 359
177 GR Electronics LTD 278
204 GW Computers 303
179 H & E Computronics 279
191 H & E Computronics 294, 295
296 Hanley Engineering 382
56 Hardhat Software 92
222 Hardside 312, 313
167 Hayden Book Co Inc 262
84 Hayes Microcomp Prod Inc 135
95 Hazeltine Corp 154, 155
40 Heath Company 71
70 Heath Company 113
7 High Technology Inc 14
335 Hobbyworld Electronics 397
53 Houston Instruments 89
54 Houston Instruments 89
367 Ibex Comp Corp 406
254 IDM 332
34 Image Resource Corp 57
14 Industrial Micro Systems 25
94 Industrial Micro Systems 151
51 Integral Data Sys 87
202 Integrand 301
17 Intel 30, 31
85 Intel 136, 137
133 Intelligence Systems 214
355 Interactive Comp Sys Inc 408
200 International Microsystems 301
10 Intertec Data Sys 17
80 Intertec Data Sys 127
* Ithaca Intersystems 8, 9
358 J & S Computers 408
116 Jade Computer Prod 193
372 Jade Comp Products 410, 411
373 Jameco Electronics 412, 413
43 JDR MICRODEVICES INC 76
256 Jepsan Group K Inc 332
314 Jini Microsystems 386
226 Joe Computer 315
339 JR Inventory Co 400
* Kemco LTD 115
147 Kenyon Microsystems 232
303 Kit Parts LTD 384
32 Konan Corp 54, 55
90 Kurta Corp 143
210 Leapac Services 305
* Lifbt 36, 156, 157, 162, 230, 341
208 LNW Research 305
68 Lobo Drives Int'l 111
219 Macrotronics Inc 310
304 Macrotronics Inc 384
359 Macrotronics Inc 408
127 Malibu Electronics 207
198 Marketline 299
103 Marinchip Systems 171
163 Marot Software Systems Inc 253
189 Mark of the Unicorn 293
227 Marway Products Inc 316
60 Marymac Industries Inc 266
100 Maxell Data 165
* McGraw-Hill Magazines 152, 153
* Meas Sys & Controls 29, 95
182 Meta Technologies Corp 285
213 MICAH 307
166 MicroAce 259
118 MicroAmerica Distributing 194
120 MicroAmerica Distributing 195
37 Micro Age Computer Store 65
101 Micro Age Computer Store 169
252 Micro Ap 331
168 Micro Appl Group (MAG) 263
205 Micro Architect 303
291 Micro Business World 381
135 Micro Computer Brokers 217
* Micro Comp Discount Co 188
98 Microcomputer Tech Inc 163
39 MicroDaSys 69
71 Micro Data Base Sys 117
* Micro Focus 109
35 Micro House 58
110 Micromail 183
104 Micro Management Sys 173
96 Micro Mikes 159
* The Micro Mint 392
342 Micro Processor Sys Inc 404
* Micro Pro International 289
24 MICRO-SCI 41
366 Microsette 406
76 Microsoft 123
146 Microsoft (Cons Prod Div) 231
272 MicroTax Software 94
229 MicroTech Exports 317
20 Microtek Inc 37
181 Microware 283
77 The Micro Works 124
88 Micro World 141
325 Mikos 390
157 Miller Microcomputer Ser 246
173 Mindex Infosystems 272
261 Mini Computer Suppliers 335
30 Mini Micro Mart 52
172 Mini Micro Mart 271
380 Mini Micro Mart 426
381 Mini Micro Mart 427
382 Mini Micro Mart 428
383 Mini Micro Mart 429
266 Miro Computers 337
26 Morrow/Thinker Toys 44, 45
12 Mountain Computer Inc 19
61 Mountain Computer Inc 100
138 mpi 221
33 MTI, Inc 56
248 MT Microsystems 328, 329
21 Multi Business Comp Sys 38
19 Nat Microsoftware Prod Inc 35
117 NEECO 194
119 NEECO 195
281 Nestar Systems Inc 379
108 Netronics 181
* Netronics 128, 130, 132, 134
86 NNC Electronics 138
245 Noesis Computing Co 326
18 North Star 33
251 Northwest Comp Serv Inc 331
48 Novation 80
* NRI Schools 209
64 Ohio Scientific Instr 104, 105
386 Ohio Scientific Instr C IV
52 OK Machine & Tool 88
253 Oliver Advanced Eng 331
188 Omikron 293
128 Omega Micro Computers 208
175 Omega Research 274
106 Omega Sales Co 177
* onComputing 257
233 Optimal Technology 319
55 Orange Micro 91
66 Organic Software 108
171 Osborne/McGraw-Hill 269
* Owens Associates 276, 277
259 Pace Inc 333
297 Pacific Exchanges 382
316 Pacific Exchanges 386
352 Pacific Exchanges 408
329 Page Digital 393
159 Pan American Elec 248
129 PCD Systems Inc 210
273 PDF Corp 341
312 Pensadyne Comp Services 386
8 Percom Data 15
78 Percom Data 125
79 Percom Data 125
309 Peripherals Plus 384
125 Personal Micro Comp Inc 203
25 Personal Software 43
* Phase One Systems 251
152 Pickles & Trout 238
269 pk systems inc 339
92 Power One Inc 147
* Priority One 122
377 Priority One 420, 421
230 Professional Data Sys 317
50 Professional Software Inc 83
22 Programma International 39
184 Prog Software Exch 291
136 The Purchasing Agent 217
289 QC Microsystems 191
74 QT Comp Systems 120, 121
315 Quality Computer Parts 386
284 Quality Data Supply 380
153 Quality Software 239
122 Quasar Data Products 199
371 Quest 409
298 Quintrex Inc 382
* R & B Computer Systems 322
241 R & K Enterprises 323
216 Racet Computes 309
27 Radio Shack 47
132 RCA Solid State 213
9 REI Sales Co 16
344 RMF Products Inc 404
290 rmi 380
267 RNB Enterprises 338
327 Rochester Data 392
62 Rockwell International 102
197 RTR Software 299
220 S & M Systems 311
305 S & S Computing 384
270 S-100 Inc 339
174 Howard W Sams Co 273
193 SC Digital 297
2 Scion Corp 5
102 SciTronics Inc 170
115 Scott Instruments 192
131 Scottsdale Systems 212
113 Seattle Computer 187
234 Selanar 319
190 Service Technologies 293
161 Shepardson Microsystems 250
67 Michael Shrayer Software 110
* Shugart 7
* Sinclair Research 81
112 Sirius Systems 185
356 Skyles Electr Works 408
57 Small Business Appl 93
44 Smoke Signal Broadcasting 77
45 Smoke Sig Broad (Dealers) 77
180 Snapp Inc 281
183 Softech Microsystems 287
58 SOFTWARE INC 94
282 Software Consultants 380
280 Software Dev & Trn 368
143 The Software Exchange 227
160 The Software Exchange 249
82 The Software Federation 131
337 Software Labs 398
347 The Software Toolworks 404
263 The SoHo Group 335
324 Solid State Sales 390
353 Solid State Surplus 408
368 Sonora Computing 406
23 Sorcim 40
124 Sorrento Valley Assoc 202
237 Sound Concepts 321
109 Southern Comp Systems 182
350 Southwestern Mngmnt Sys 404
384 Southwest Tech Prod Corp C II
236 Spectrum Software 321
365 SP Electronics 406
5 SSM 11
242 Stonehenge Computer Co 325
176 Strategic Simulations 275
287 Street Electronics 380
170 Strobe 267
278 SubLOGIC 336
195 Summagraphics 298
336 Sunny Int'l 398
65 SuperSoft 107
169 SuperSoft 265
232 SuperSoft 319
246 SuperSoft 327
41 Sybex 72, 73
* Synchro Sound 114, 333
257 Synergetic Comp Prod 333
370 Systek Inc 406
186 System Software 291
145 Tarbell Electronics 229
38 Tech Sys Consultants (TSC) 67
294 Technical Innovations 382
121 Tec-Mar Inc 197
206 Texas Comp Sys 303
47 3M Company 79
89 3G Company 142
142 Thunderware 226
201 Mitchell E Timin Eng Co 301
* Robert Tinney Graphics 167
260 TNW Corp 335
318 The Toolsmith 386
185 TransNET 291
385 United Business Products CIII
* United Software of Am 84, 85
29 Universal Data Systems 51
369 Universal Security Inst 406
351 US Micro Sales 405
* US Robotics 101
239 VANDATA 323
59 Vector Graphics 97
286 Videx 380
203 Vintage Books 302
36 Vista Computer Co 59
323 Vista Computer Co 389
364 VLSI Computer Sys 406
218 Voicetek 309
375 VR Data 416, 417
330 Wameco 394
313 WCAS 386
* Whitesmith's Ltd 99
258 Wild Hare Comp Sys 333
292 Wintek Corp 382
264 Winterhalter & Assoc 337
357 Worldwide Electronics 408
340 WW Component Supply Inc 400
360 X & Y Enterprises 408
192 Zilog Inc 297
271 Z_S Systems 341

A COMPANY TO RELY ON. . .
UNITED BUSINESS PRODUCTS













UNITED BUSINESS PRODUCTS
20268 E. Carrey Rd.
WALNUT, CA. 91789

UNITED BUSINESS PRODUCTS

(213) 448-4850
(714) 594-5966

NAME OF COMPANY _____

ADDRESS _____

CITY, STATE, ZIP _____

ATTENTION OR DEPT. _____

A ☐ The swingline table top burster will separate single-ply continuous forms into individual sheets up to 15". Length 2⅝" to 12". Paper weight 10 to 110 lb. bond. Speed is constant at 125 ft. per minute.

Wt. 95 lbs. **Price $ 899.00**

B ☐ Our custom forms have a guarantee that speaks for itself. Our time on forms range from two to five weeks for custom work and before we start a job we now give a guaranteed shipping date and price, depending on art work, from two to five weeks and for every day we're late we give you a 10% discount. To get a quote just mail the detached portion of this ad with sample of form or layout and we will call you the day we get the information with a price and guaranteed day of shipment.

C ☐ The swingline table top decollator is a portable unit which separates both carbon and carbonless continuous computer forms into stacks. The separated carbon is easily and neatly removed from carbon pick-up spool. Form size is up to 15" wide. Wt. is 10 to 110 lb. bond paper, and the speed is variable from 75 to 200 feet per minute and takes only 120 volts AC 60 hertz to operate.

Wt. 40 lbs. **Price $ 419.00**

D ☐ The Datatech Intimus 007 shredder works for Scotland Yard, for government authorities, for important corporations, banks and embassies. The cutting capacity is 12 to 14 sheets at one pass. Cross cut is 1/35 x 3/8. It has a 2 H.P. motor and runs off of 220/380 V 3 phase.

Wt. 320 Lbs. **Price $6799.00**

E ☐ The Intimus 306 is designed for trouble free operation and has a switch for forward and reverse rotation. It has 2 motors with terminal overload. Housing consists of coated steel, mounted on rubber cushions for noiseless shredding. The 306 can sit on a table or a stand. Cutting width is ⅛" or ¼" and has two 150 watt 110 V 60 cycle, 1 phase motors.

Wt. 66 Lbs. **Price $1199.00**

F ☐ The Intimus Simplex is designed for security without problems in the office. One push of the button renders confidential information into five illegible paper strips ⅛" thin. The simplex has a wide opening in the middle for throw away of cans, etc. Even a paper clip is simply cut into pieces. The cutting capacity is 8 to 10 sheets at one time. It has a 1/5 H.P. motor and runs off of 110 volts.

Wt. 27 Lbs. **Price $ 599.00**

G ☐ Our catalog consists of more information on equipment in this ad. Other models are available plus a complete line of calculators and typewriters by Adler, Lathem time recorders, several varieties of safes, and our disintegrator that destroys paper, aluminum, film and carbon to a complete loss of identity.

Price $2.00

H ☐ Free Brochures and more information:
1. ☐ Business Forms
2. ☐ Calculators
3. ☐ Forms Handling Equipment
4. ☐ Time Recorders
5. ☐ Typewriters

Terms: Check or money order U.S. funds only. Prepaid orders add 3% S/H, COD's add 5% S/H (U.S.only). California residents add 6% sales tax.
Prices subject to change without notice.

master charge

VISA

Circle 385 on inquiry card.

marcus b

Ohio Scientific: The leader in Winchester based micro-computers.



Ohio Scientific produced the first large capacity fixed media hard disk (Winchester) based microcomputers in 1977. Since then we have shipped more of these systems than the rest of the microcomputer industry combined.

Family Features
All standard C3 features including:
- 3-processor CPU with 6502, Z80 and 6800
- .7 MIPS 6502A
- 48K static RAM
- Dual 8" floppies
- Free standing rack for direct expansion capabilities
- 17-slot OSI 48 line BUS architecture for large system expansion
- Directly accepts up to 8 users with currently available memory boards, more with higher density boards in the future
- Directly expandable for use as Network data bases
- Slide-mounted subassemblies, removable side panels and locking rear door for easy expansions and service.

C3-A
The floppy only rack based C3 for users who anticipate expansion to hard disk, multi-user and/or networking in the future. **Under $7000.**

C3-B
The world's most powerful microcomputer (when GT equipped). Features the highly advanced and extensively field proven OKIDATA 3306 Winchester disk.

Features
- System boots from floppies or hard disk on power up
- 74 megabytes end user workspace under OS-65U, 80 megabytes unformatted
- Ultra-high performance disk
  74 millisec worst case access
  38 millisec average
  10 millisec access on cylinder (215K user workspace)
  8 megabits per second transfer rate
- Simple on/off disk operation with elaborate internal protection from improper temperature, line voltage and controller failures
- Features spindle brake and designated head landing areas for much longer operational life than the newer low-cost Winchesters
- Highly advanced OS-65U operating system:
  Multiple level pass word security
  Multiple operating systems on disk
  Ultra-high speed "FIND" command for high speed string searches (Associative Access)
  Upward compatible with multi-user and network systems with full file, peripheral and communications arbitration between users
- Available factory configured for up to 8 users and network data base operation
- Expandable to CP/M operation by adding 4K (CM-2 memory) **Under $14,000**

C3-C
A medium performance Winchester disk based system which provides the ideal cost/performance ratio in typical small business applications. The C3-C uses the Shugart SA4008 29 megabyte Winchester disk.
Performance specifications, hardware configuration and software is identical to the C3-B with the following exceptions:
- 23 megabytes of end user workspace under OS-65U
- 29 megabytes unformatted capacity
- Medium performance Winchester
  240 millisec worst case access
  87 millisec average access
  10 millisec access on cylinder (110K user workspace)
- Simple on/off disk operation **Under $11,000**

Ohio Scientific has a new OEM program that is easy to start with, and provides generous discounts for quantity purchases.

For literature and the name of your local dealer, CALL 1-800-321-6850 TOLL FREE.

OHIO SCIENTIFIC
1333 SOUTH CHILLICOTHE ROAD
AURORA, OH 44202 • (216) 831-5600

Circle 386 on inquiry card.