

CLL457A
CLL459A

SURFACE MOUNT
LOW LEAKAGE SILICON DIODE



SOD-80 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL457A, CLL459A types are silicon planar diodes, manufactured in a hermetically sealed glass surface mount package, designed for low leakage applications.

MARKING CODE: CATHODE BAND


MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

	SYMBOL	CLL457A	CLL459A	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	70	200	V
Peak Working Reverse Voltage	V_{RWM}	60	175	V
Average Forward Current	I_O		200	mA
Forward Steady-State Current	I_F		500	mA
Peak Forward Surge Current (1.0μs pulse)	I_{FSM}		4.0	A
Power Dissipation	P_D		500	mW
Operating and Storage				
Junction Temperature	T_J, T_{stg}		-65 to +200	°C
Thermal Resistance	Θ_{JA}		350	°C/W

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	CLL457A		CLL459A		UNITS
		MIN	MAX	MIN	MAX	
BV_R	$I_R=100\mu\text{A}$	70		200		V
I_R	$V_R=\text{Rated } V_{RWM}$		25		25	nA
I_R	$V_R=\text{Rated } V_{RWM}, T_A=150^\circ\text{C}$		5.0		5.0	μA
V_F	$I_F=100\text{mA}$		1.0		1.0	V
C_T	$V_R=0, f=1.0\text{MHz}$		6.0		6.0	pF

SOD-80 - MECHANICAL OUTLINE

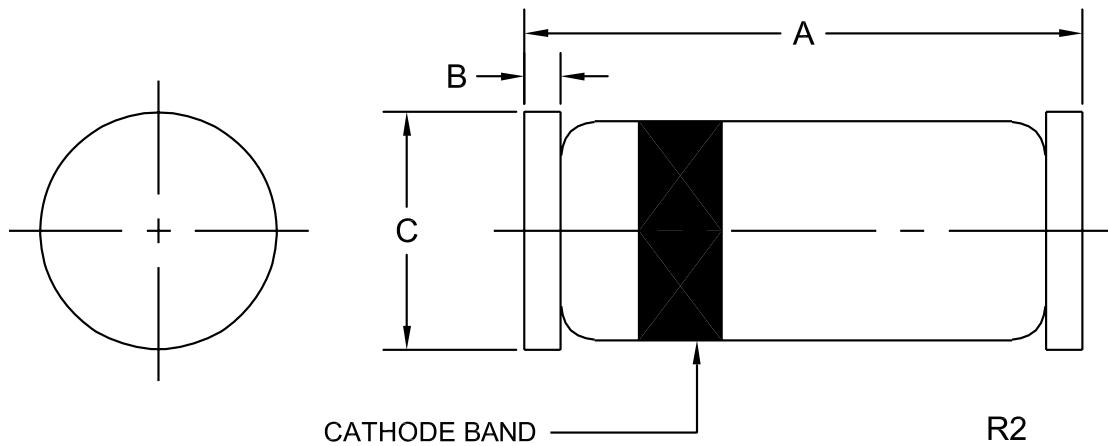

MARKING CODE: CATHODE BAND

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B		0.014		0.35
C (DIA)	0.049	0.067	1.25	1.70

SOD-80 (REV:R2)

R4 (22-August 2006)