

# PQ3RF23/PQ3RF33

3.3V output, High Output Current (2A, 3.5A) Type Low Power-loss Voltage Regulators


## ■ Features

- 3.3V output
- High output current  
2A type : PQ3RF23  
3.5A type: PQ3RF33
- Compact resin full-mold package (TO-220 package)
- Low power-loss (Dropout voltage : MAX. 0.5V)
- High-precision output voltage type  
Output voltage precision :  $\pm 2.5\%$
- Built-in ON/OFF control function
- Built-in overcurrent protection, overheat protection function


## ■ Applications

- Power supplies for various electronic equipment such as personal computers

## ■ Outline Dimensions

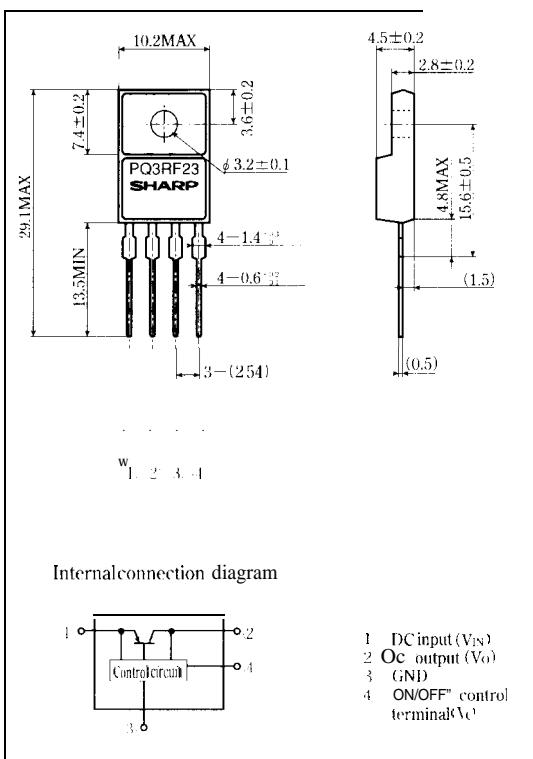

Internal connection diagram



- |   |  |
|---|--|
| 1 | DC input ( $V_{IN}$ )                          |
| 2 | OC output ( $V_O$ )                            |
| 3 | GND  |
| 4 | ON/OFF <sup>a</sup> control terminal ( $V_C$ ) |

## ■ Absolute Maximum Ratings

( $T_a=25^\circ C$ )

Parameter	Symbol	Rating	Unit
*1 Input voltage	$V_{IN}$	10	V
*1 ON/OFF control terminal voltage	$V_C$	10	V
Output current	I <sub>O</sub>	PQ3RF23	2
		PQ3RF33	3.5
Power dissipation (No heat sink)	$P_{D1}$	PQ3RF23	1.5
		PQ3RF33	1.8
Power dissipation (With infinite heat sink)	$P_{D2}$	18	W
*2 Junction temperature	$T_j$	150	°C
Operating temperature	$T_{opr}$	-20 to +80	°C
Storage temperature	$T_{stg}$	-40 to +150	°C
Soldering temperature	$T_{sol}$	260 (For 10s.)	°C

\*1 All are open except GND and applicable terminals

\*2 Overheat protection may operate at  $125 \leq T_j \leq 150$  °C

Please refer to the chapter "Handling Precautions"

**SHARP**

**■ Electrical Characteristics** (Unless otherwise specified, conditions shall be  $I_{O}=1.0A$ [PQ3RF23] /  $I_{O}=1.5A$ [PQ3RF33],  $V_{IN}=5V$ ,  $T_a=25^\circ C$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	$V_O$		3.218	3.3	3.382	V
Load regulation PQ3RF23	$R_{regL}$	$I_O=5mA$ to $2.0A$		0.2	2	%
PQ3RF33		$I_O=5mA$ to $3.5A$		0.2	2	
Line regulation	$R_{regI}$	$V_{IN}=4$ to $10V$		0.5	2.5	%
Temperature coefficient of output voltage	$T_C V_O$	$T_j=0$ to $125^\circ C$		$\pm 0.02$		%/ $^\circ C$
Ripple rejection	$RR$		45	55		dB
Dropout voltage PQ3RF23	$V_{DRO}$	$^{*3}, I_O=2.0A$			0.5	V
PQ3RF33		$^{*3}, I_O=3.0A$			0.5	
*4ON-state voltage for control	$V_C (ON)$		2			V
ON-state current for control	$I_C (ON)$	$V_C=2.7V$			20	$\mu A$
OFF-state voltage for control	$V_C (OFF)$				0.8	V
OFF-state current for control	$I_C (OFF)$	$V_C=0.4V$			-0.4	mA
Quiescent current	$I_Q$	$I_O=0A$			10	mA

\*3 Input voltage shall be the value when output voltage is 95% in comparison with the initial value

\*4 In case of opening control terminal 4, output voltage turns on.

Fig.1 Test Circuit

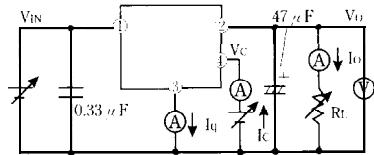


Fig.2 Test Circuit of Ripple Rejection



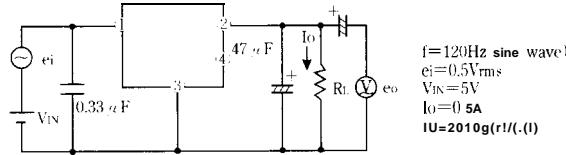


Fig.3 Power Dissipation vs. Ambient Temperature (PQ3RF23)






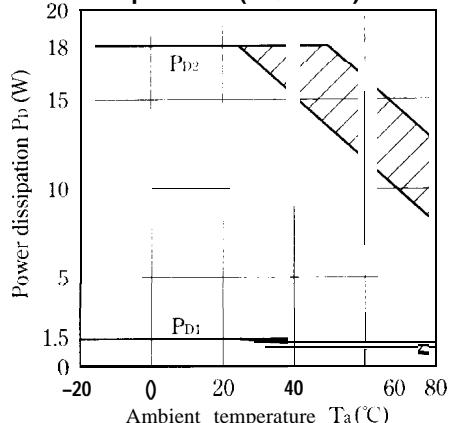


Note) oblique line portion: Overheat protection may operate in this area.

Fig.4 Power dissipation vs. Ambient temperature (PQ3RF33)

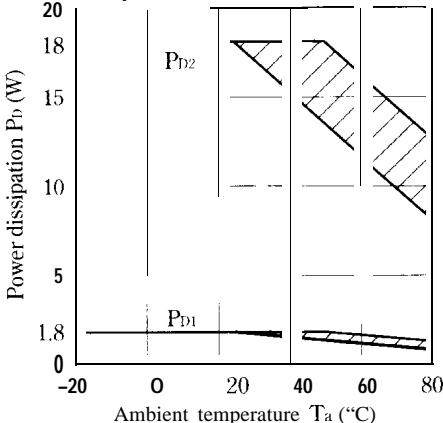


Note) Oblique line portion : overheat protection may operate in this area.

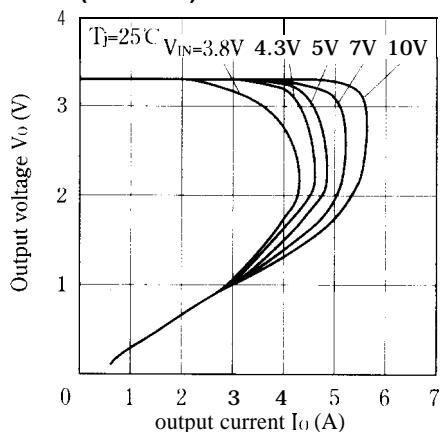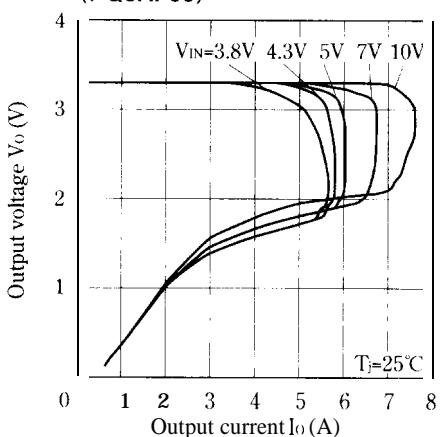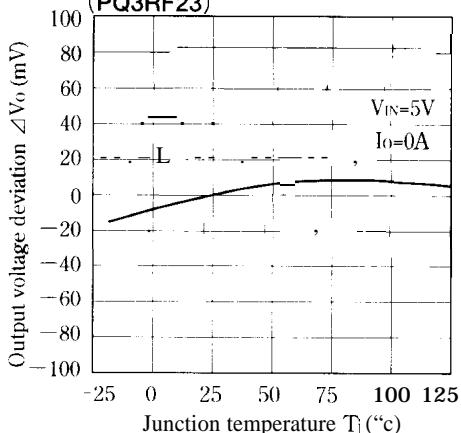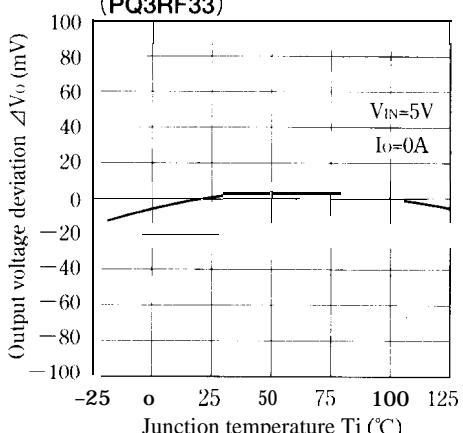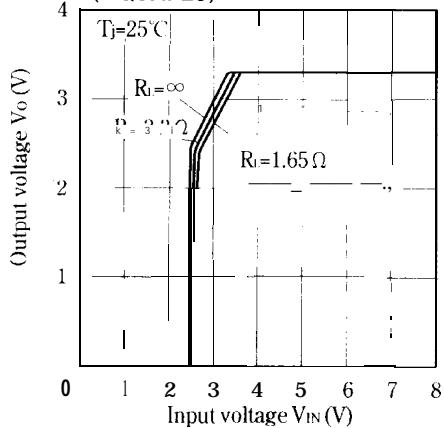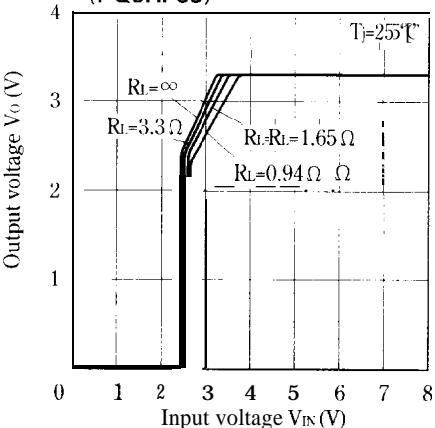**Fig.5 Overcurrent Protection Characteristics (PQ3RF23)****Fig.6 Overcurrent Protection Characteristics (PQ3RF33)****Fig.7 Output Voltage Deviation vs. Junction Temperature (PQ3RF23)****Fig.8 Output Voltage Deviation vs. Junction Temperature (PQ3RF33)****Fig.9 Output Voltage vs. Input Voltage (PQ3RF23)****Fig.10 Output Voltage vs. Input Voltage (PQ3RF33)**


# Low Power-Loss Voltage Regulators

## PQ3RF23/PQ3RF33

**Fig.11** Circuit Operating Current vs. Input Voltage  
(PQ3RF23)

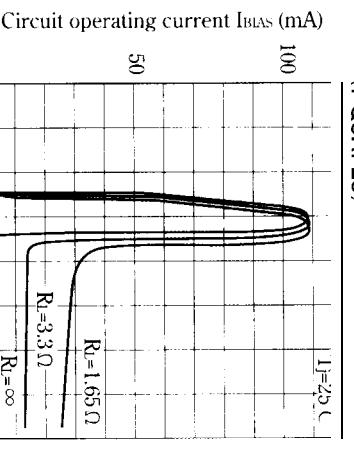


**Fig.13** Dropout Voltage vs. Junction Temperature  
(PQ3RF23)

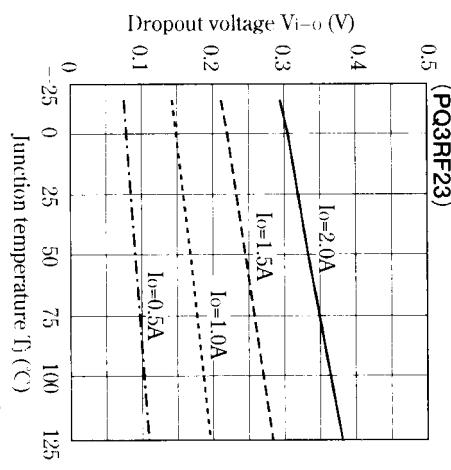


**Fig.15** Quiescent Current vs. Junction Temperature


(PQ3RF23)

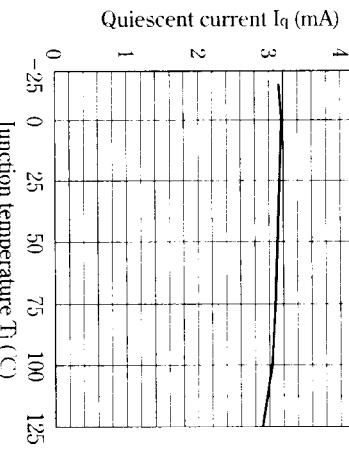

**Fig.12** Circuit Operating Current vs. Input Voltage  
(PQ3RF33)

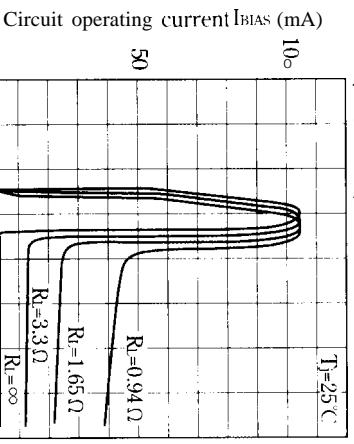


**Fig.14** Dropout Voltage vs. Junction Temperature  
(PQ3RF33)

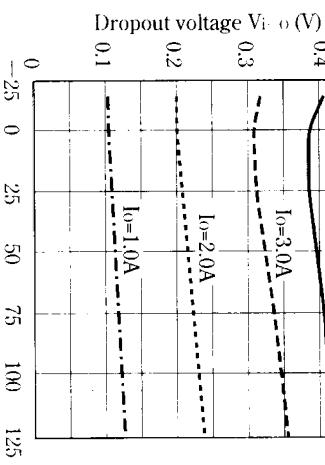


**Fig.16** Quiescent Current vs. Junction Temperature


(PQ3RF33)

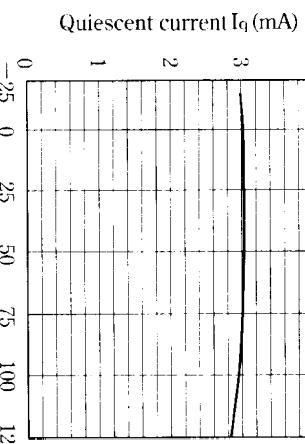


**Fig.17 Ripple Rejection vs. Input Ripple Frequency (PQ3RF23)**

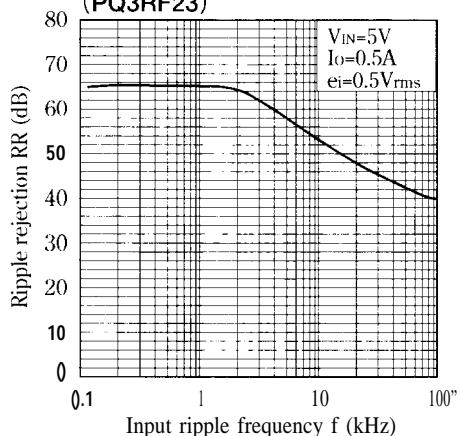


**Fig.19 Ripple Rejection vs. Output Current (PQ3RF23)**

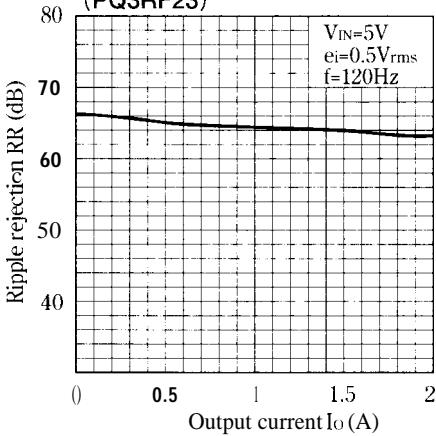


**Fig.21 Output Peak Current vs. Junction Temperature (PQ3RF23)**

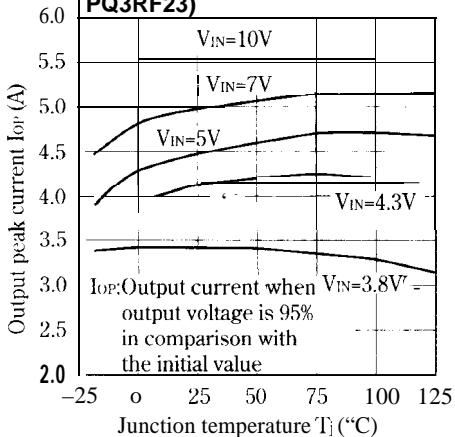


**Fig.18 Ripple Rejection vs. input Ripple Frequency (PQ3RF33)**

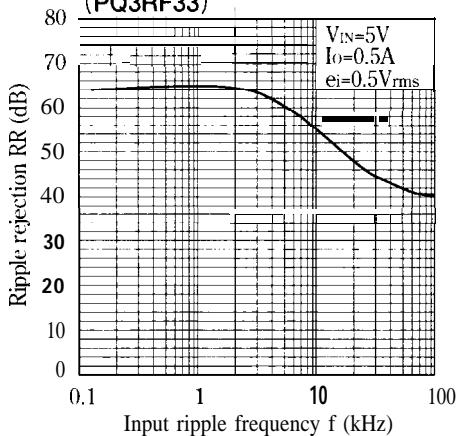

**Fig.20 Ripple Rejection vs. Output Current (PQ3RF33)**

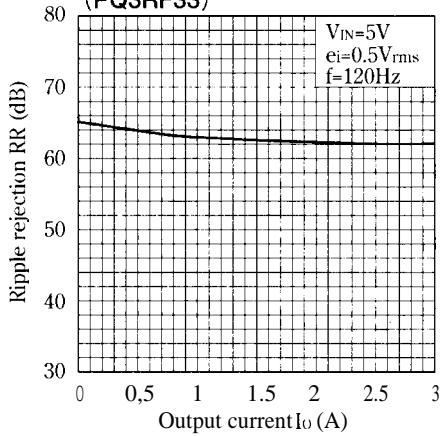

**Fig.22 Output Peak Current vs. Junction Temperature (PQ3RF33)**

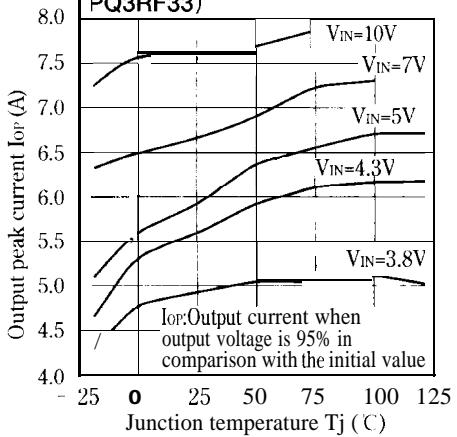

**■ Typical Application**