

PQ05SZ5/PQ05SZ1 Series

Low Power-Loss Voltage Regulators (Built-in Reverse Voltage Protection Function)

■ Features

- Low power-loss (Dropout voltage: MAX. 0.5V)
- Surface mount type package (Equivalent to SC-63)
- Built-in a function to prevent reverse voltage between input and output
The diode to prevent reverse voltage between input and output is not necessary.(When $V_{O1} \leq 13V$)

■ Applications

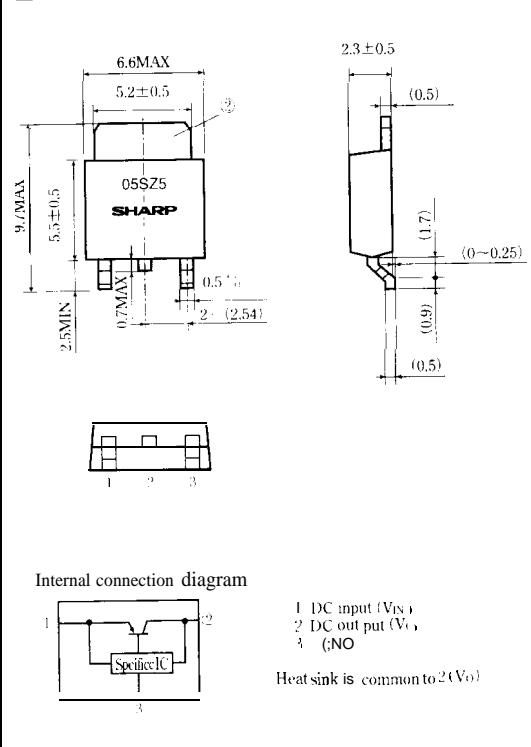
- Portable equipment
- Notebook PC

■ Model Line-ups

	5V output	9V Output	12V output
0.5A output	output voltage precision: $\pm 5\%$	PQ05SZ5	PQ09SZ5
Output voltage precision: $\pm 2.5\%$.	PQ05SZ51	PQ09SZ51	PQ12SZ51
Output voltage precision: $\pm 5\%$	PQ05SZ1	PQ09SZ1	PQ12SZ1
output voltage precision: $\pm 2.5\%$	PQ05SZ1 1	PQ09SZ1 1	PQ12SZ11

■ Outline Dimensions

(Unit : mm)



■ Absolute Maximum Ratings

($T_a = 25^\circ C$, xx=05,09,12)

(xx: 05,09,12)

Parameter	Symbol	Conditions	Rating		Unit
			PQxxSZ5/51	PQxxSZ1/11	
Input voltage	V_{IN}	*1	24		V
Input-output reverse voltage	V_{O1}	$V_{IN}=0V$	13		V
Output current	I_O		0.5	1.0	A
Power dissipation	P_D	Refer to Fig. 4 *2	8		W
Junction temperature	T_J	*	150		°C
Operating temperature	T_{opr}		-20 to +80		°C
Storage temperature	T_{stg}		-40 to +150		°C
Soldering temperature	T_{sol}	For 10s	260		°C

*1 All are open except GND and applicable terminals

*2 With infinite heat sink.

* Over heat protection may operate at $T_J \geq 125^\circ C$

Please refer to the chapter "Handling Precautions"

SHARP

"In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP device."

■ Electrical Characteristics

Parameter	Symbol	Conditions		MIN.	m	MAX.	Unit
Output voltage	PQ05SZ1/5	V _{IN} =7V	*3	4.75	5.0	5.25	v
	PQ09SZ1/5	V _{IN} =11V		8.55	9.0	9.45	
	PQ12SZ1/5	V _{IN} =14V		11.4	12.0	12.6	
	PQ05SZ1/5/1	V _{IN} =7V		4.88	5.0	5.12	
	PQ09SZ11/5/1	V _{IN} =11V		8.78	9.0	9.22	
	PQ12SZ11/5/1	V _{IN} =14V		11.7	12.0	12.3	
Load regulation	R _{regL}	*4			0.2	2.0	%
Line regulation	R _{regI}	I _O =5mA	*5		0.1	2.5	%
Temperature coefficient of output voltage	T _{C(V)}	I _O =5mA, T _J =0 to 125°C	*6		±0.01	—	%/°C
Ripple rejection	RR	Refer to Fig.2		45	60		dB
Dropout voltage	PQxxSZ1/11	V _{i-O}	*7	I _O =0.5A	0.2	0.5	v
	PQxxSZ5/51			I _O =0.3A			
Quiescent current	I _q	I _O =0A	*6		4.0	10.0	mA

*3 PQxxSZ1/11 Series: I_O=0.5APQxxSZ5/51 Series: I_O=0.3A*4 PQ05SZ1/11: V_{IN}=7V, I_O=5mA to 1OA PQ05SZ5/51: V_{IN}=7V, I_O=5mA to 0.5APQ09SZ1/11: V_{IN}=11V, I_O=5mA to 1.0A PQ09SZ5/51: V_{IN}=11V, I_O=5mA to 0.54APQ12SZ1/11: V_{IN}=14V, I_O=5mA to 1.0A PQ12SZ5/51: V_{IN}=14V, I_O=5mA to 0.5A*5 PQ05SZ1/11/5/51: V_{IN}=6 to 16VPQ09SZ1/11/5/51: V_{IN}=10 to 20VPQ12SZ1/11/5/51: V_{IN}=13 to 23V*6 PQ05SZ1/11/5/51: V_{IN}=7VPQ09SZ1/11/5/51: V_{IN}=11VPQ12SZ1/11/5/51: V_{IN}=14V

*7 Input voltage shall be the value when output voltage is 95% in comparison with the initial value

Fig.1 Test Circuit


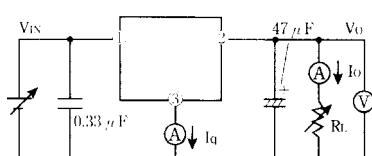


Fig.2 Test Circuit of Ripple Rejection

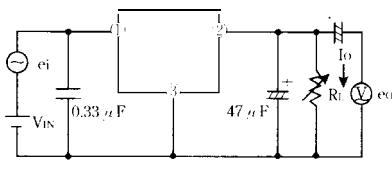

f=120Hz (sinewave)
e_i=0.5Vrms
V_{IN}=7V (PQ05SZ1/11/5/51,)
V_{IN}=11V (PQ09SZ1/11/5/51)
V_{IN}=14V (PQ12SZ1/11/5/51)
I_O=0.3A
RR=20log(e_i/e_o)

Fig.3 Overcurrent Protection Characteristics (Typical Value)


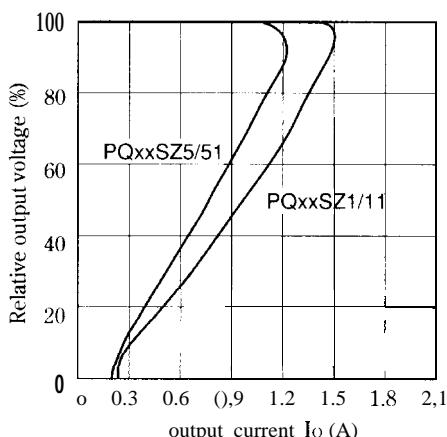


Fig. 4 Power Dissipation vs. Ambient Temperature

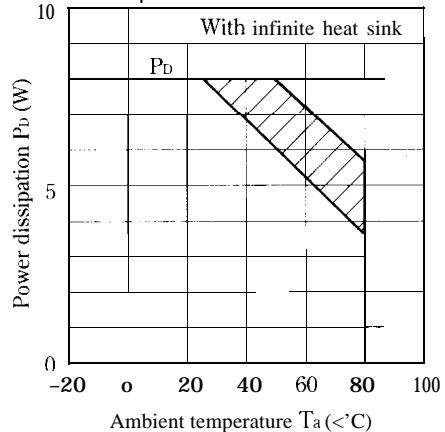

Note) oblique line portion : Overheat protection may operate in this area.

Fig. 6 Output Voltage Deviation vs. Junction Temperature (PQ09SZ1/PQ09SZ11/PQ09SZ5/PQ09SZ51)

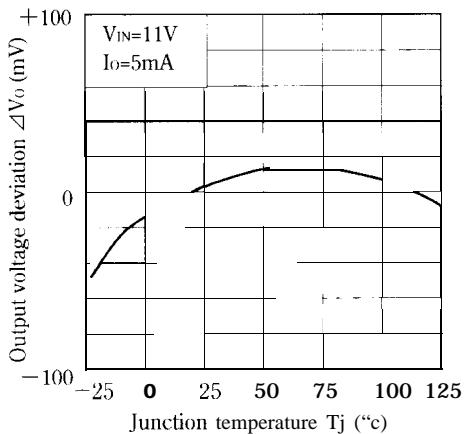


Fig. 8 Output Voltage vs. Input Voltage (PQ05SZ1/PQ05SZ11)

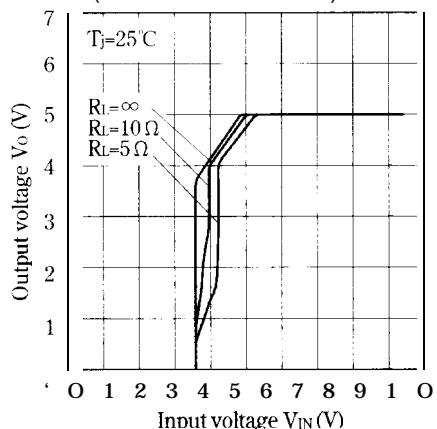


Fig. 5 Output Voltage Deviation vs. Junction Temperature (PQ05SZ1/PQ05SZ11/PQ05SZ5/PQ05SZ51)

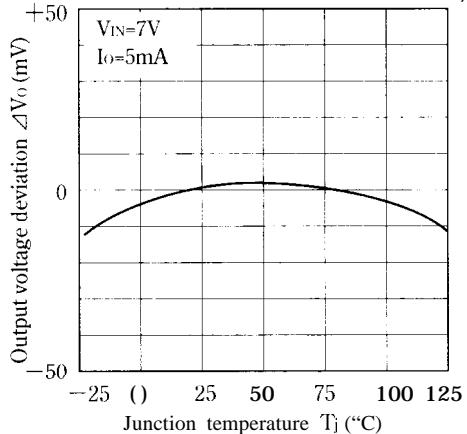


Fig. 7 Output Voltage Deviation vs. Junction Temperature (PQ12SZ1/PQ12SZ11/PQ12SZ5/PQ12SZ51)



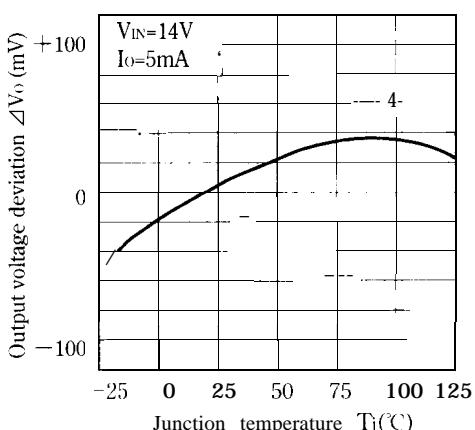



Fig. 9 Output Voltage vs. Input Voltage (PQ05sz5/PQ05sz51)

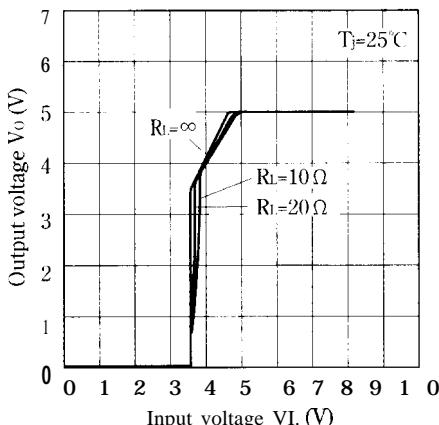


**Fig.10 Output Voltage vs. Input Voltage
(PQ09S21/pQ09S211)**

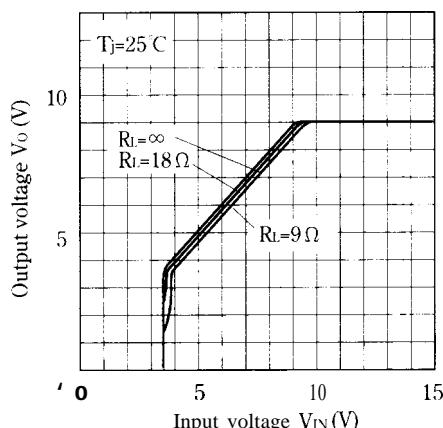


**Fig.12 Output Voltage vs. Input Voltage
(PQ12SZ1/PQI 2S211)**

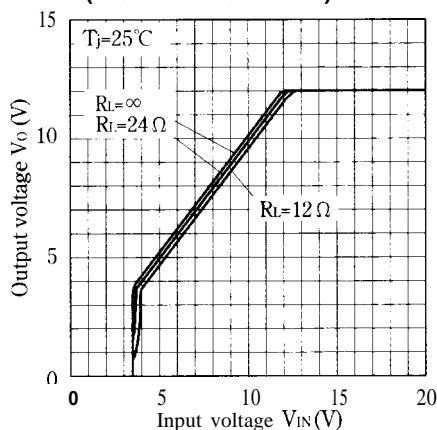


**Fig.14-a Dropout Voltage vs. Junction Temperature
(PQ05SZ5/51 Series)**

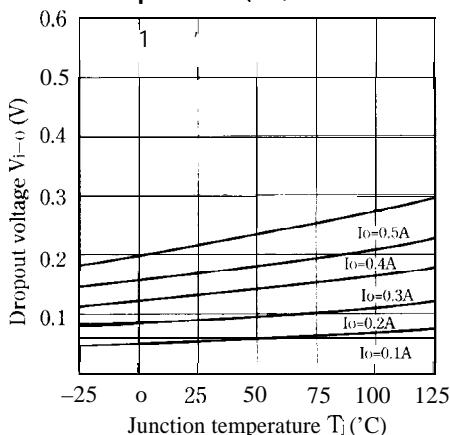

**Fig.11 Output Voltage vs. Input Voltage
(PQ09SZ5/PQ09SZ51)**

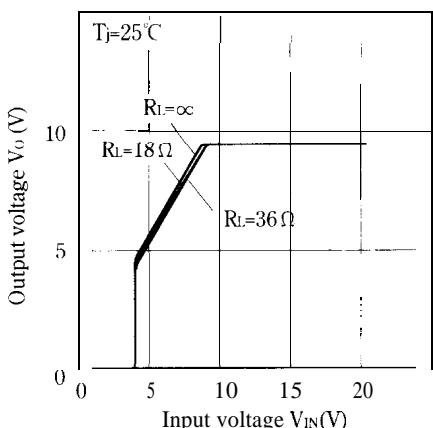

**Fig.13 Output Voltage vs. Input Voltage
(PQ12SZ5/PQI 2S251)**

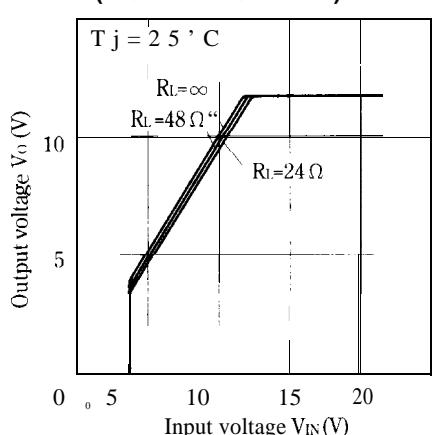

**Fig.14-b Dropout Voltage vs. Junction Temperature
(PQ05SZ1/11 Series)**

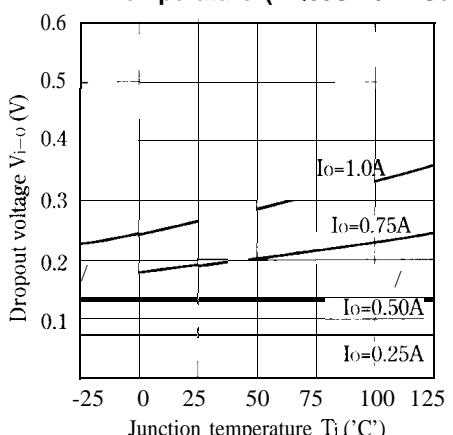


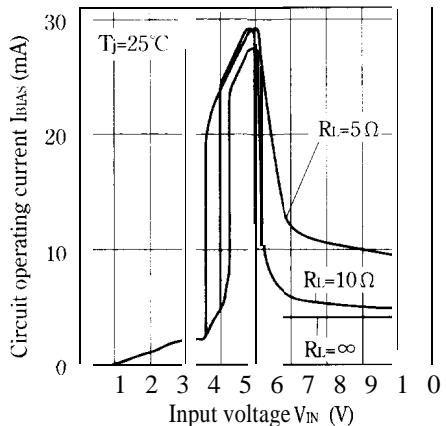
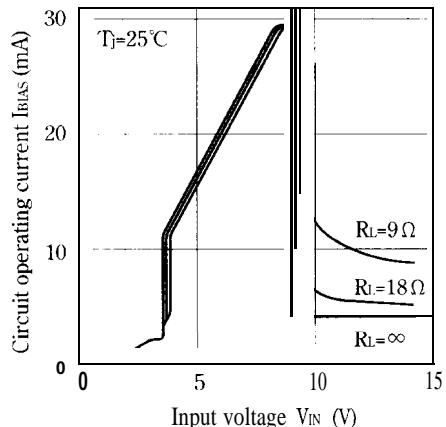
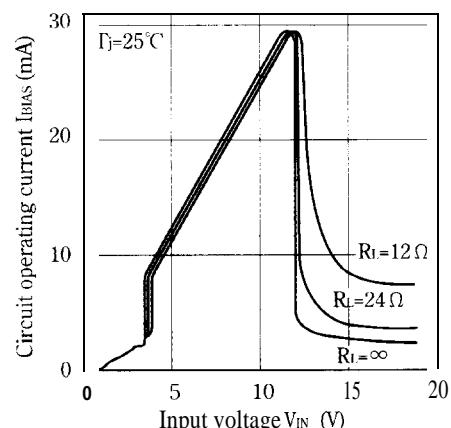
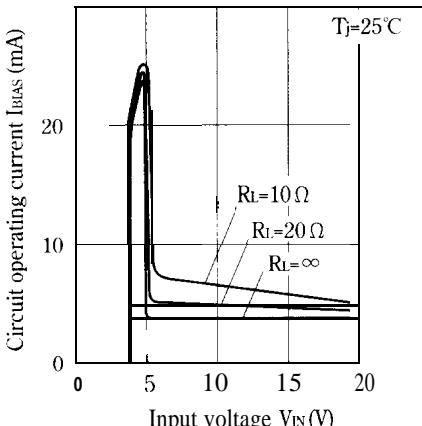
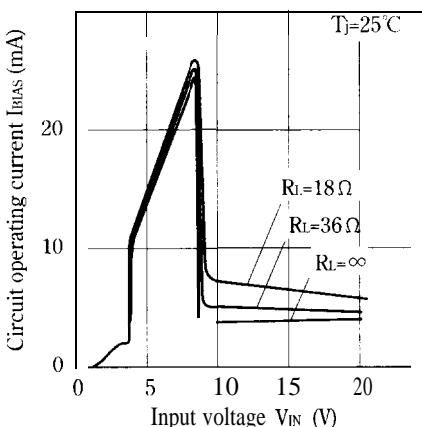
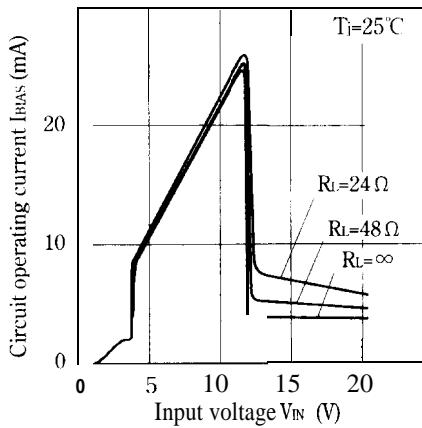
Fig.15 Circuit Operating Current vs. Input Voltage (PQ05SZ1/PQ05SZ11)**Fig.17 Circuit Operating Current vs. Input Voltage (PQ09SZ1/PQ09SZ11)****Fig.19 Circuit Operating Current vs. input Voltage (PQ12SZ1/PQ12SZ11)****Fig.16 Circuit Operating Current vs. Input Voltage (PQ05SZ5/PQ05SZ51)****Fig.18 Circuit Operating Current vs. Input Voltage (PQ09SZ5/PQ09SZ51)****Fig.20 Circuit Operating Current vs. input Voltage (PQ12SZ5/PQ12SZ51)**

Fig.21 Quiescent Current vs. Junction Temperature
 (PQ05Szi/PQ05Szi 1 /PQ09Szi/PQ09Szi1/PQ1 2S2i/
 PQ12Szi 1)

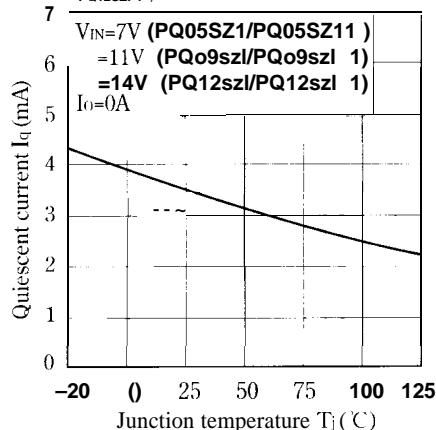


Fig.23 Ripple Rejection vs. Input Ripple Frequency
 (PQ05S25/PQ05S25i/PQ09S25/PQ09S25i/PQ12S25/
 PQ1 2S25)

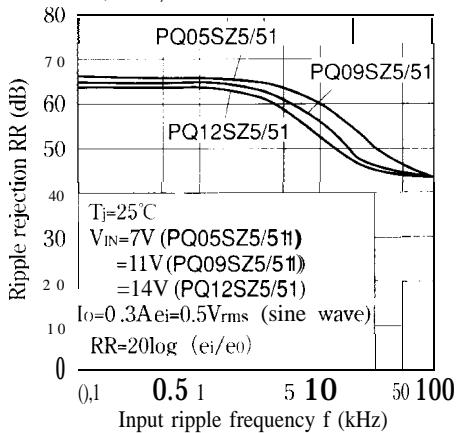


Fig.25 Ripple Rejection vs. Output Current
 (PQ05S25/51/ PQ09S25/51/ PQ1 2S25/51)

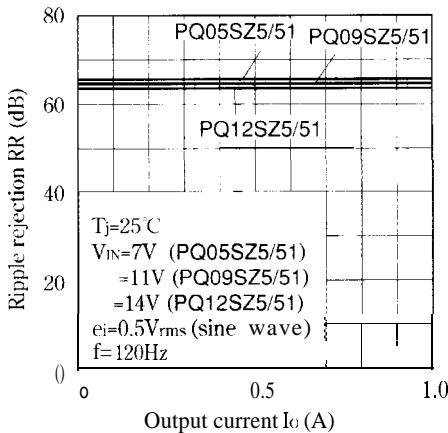


Fig.22 Ripple Rejection vs. Input Ripple Frequency
 (PQ05Szi/PQ05Szi1/PQ09Szi/PQ09Szi1 /PQ1 2S2z1/
 PQ12Szi 1)

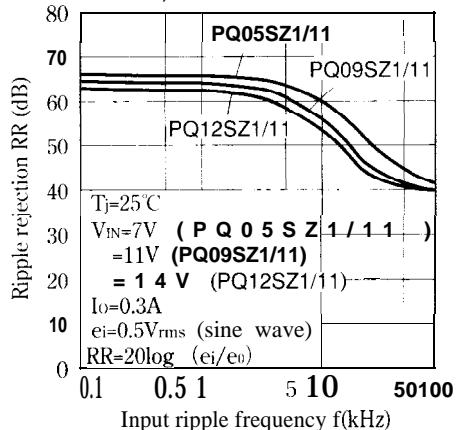


Fig.24 Ripple Rejection vs. Output Current
 (PQ05S21/11/ PQ09S21/11/ PQ12S21/11)

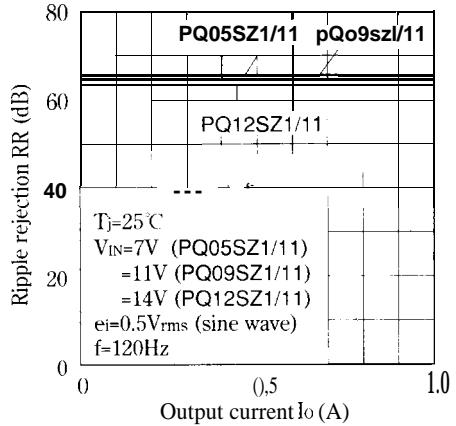


Fig.26 Input-Output Reverse Current vs. Input-Output Reverse Voltage


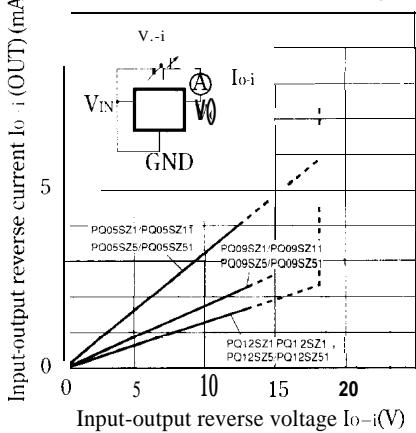
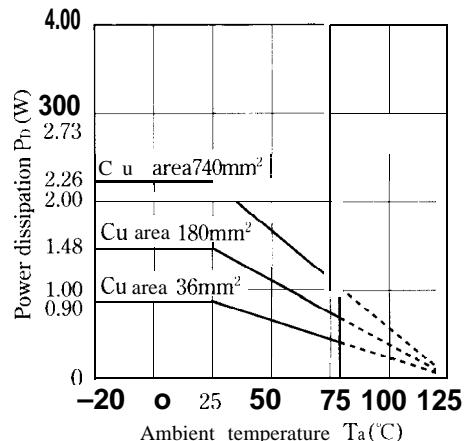
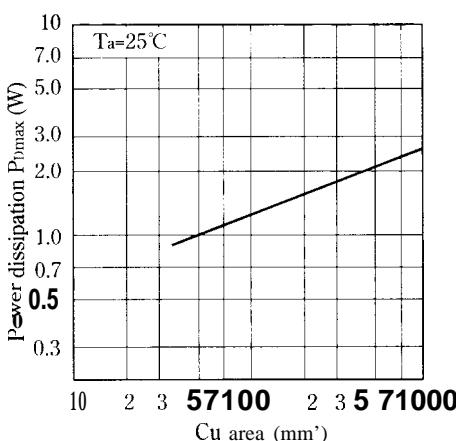


Fig.27 Power Dissipation vs. Ambient Temperature (Typical Value)**Fig.28 Power Dissipation vs. Cu Area**

PWB



Material : Glass-cloth epoxy resin
Size : 50X51X1.6mm³
Cu thickness : 35μm

■ Model Line-ups for Tape-packaged Products

	Sleeve-packaged products		Tape-packaged products	
	Standard type	High-precision output type	Standard type	High-precision output type
Output current				
0.5A output	PQ05SZ5 Series	PQ05SZ51 Series	PQ05SZ5T Series	PQ05SZ5U Series
1.0A output	PQ05SZ1 Series	PQ05SZ11 Series	PQ05SZ1 T Series	PQ05SZ1 U Series