

# GP1A75E

## Small Size OPIC Photointerrupter with Connector

### Features


1. 3-pin connector terminal
2. High sensing accuracy (Slit width: 0.5mm)
3. Wide gap between light emitter and detector (5mm)

### Applications

1. Copiers
2. Laser beam printers
3. Facsimiles

### Outline Dimensions

(Unit : mm)

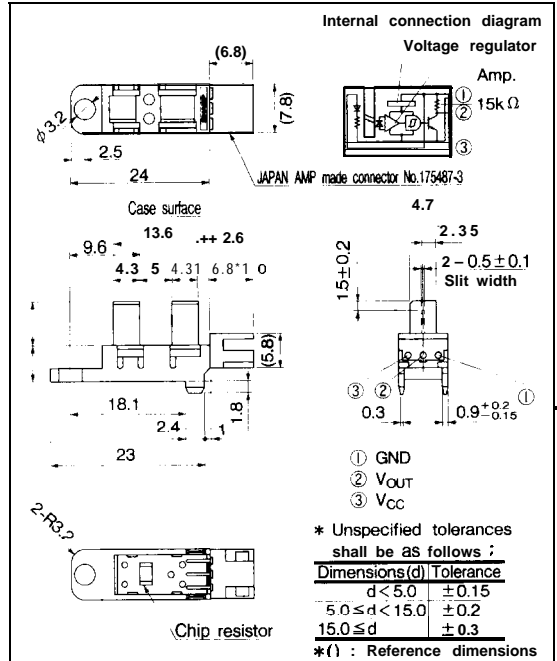

Photointerrupters

\* "OPIC" (Optical IC) is a trademark of the SHARP Corporation. An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

### Absolute Maximum Ratings (T<sub>a</sub> = 25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	-0.5 to +10	V
*1 Low level output current	I <sub>OL</sub>	50	mA
*2 Operating temperature	T <sub>opr</sub>	-20 to +75	°C
*2 Storage temperature	T <sub>stg</sub>	-30 to +85	°C

\*1 Collector current of output transistor


\*2 The connector should be plugged in/out and the unit's hook should be used at normal temperature

**■ Electro-optical Characteristics**


(Unless otherwise specified,  $V_{CC}=5V, T_a=25^{\circ}C$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Operating supply voltage	$V_{CC}$		4.5	-	5.5	v
Low level supply current	$I_{CCL}$	Light beam interrupted	-	-	20	mA
Low level output voltage	$V_{OL}$	Light beam interrupted, $I_{OI}=16mA$	-	-	0.35	v
High level supply current	$I_{CCH}$	Light beam uninterrupted	-	-	20	mA
High level output voltage	$V_{OH}$	Light beam uninterrupted	$V_{CC} \times 0.9$	-	-	v
Response characteristics		Minimum interruption time	$t_H$	166	-	$\mu s$
		Minimum sensing time	$t_L$	166	-	$\mu s$


**Fig. 1 Low Level Output Current vs. Ambient Temperature**

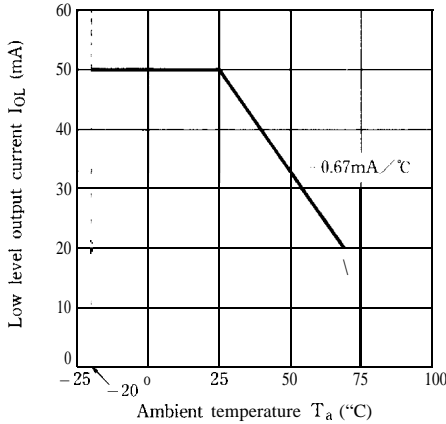

**Fig. 2 Low Level Output Voltage vs. Low Level Output Current**

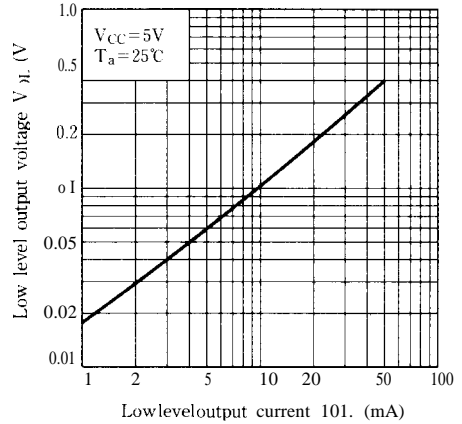

**Fig. 3 Low Level Output Voltage vs. Ambient Temperature**

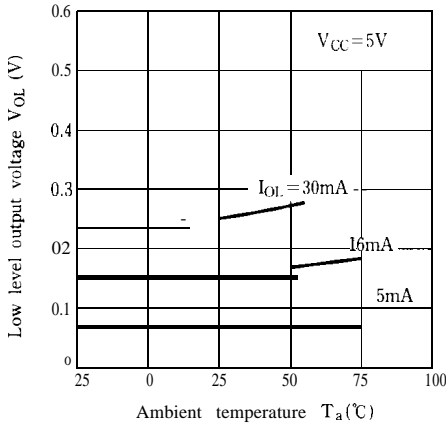

**Fig. 4 Supply Current vs. Supply Voltage**

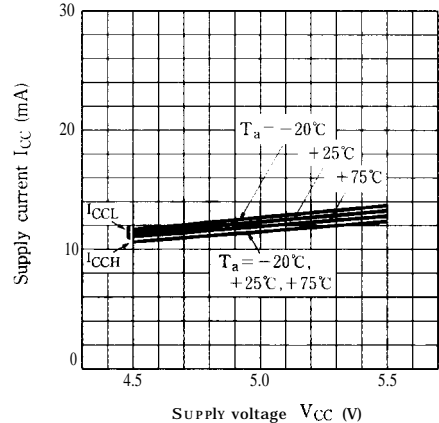


Fig. 5 Detecting Position Characteristics (1)



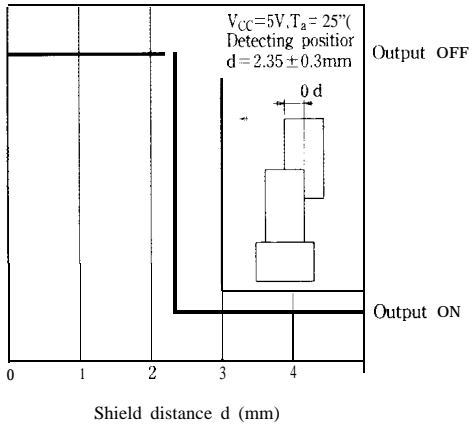


Fig. 6 Detecting Position Characteristics (2)

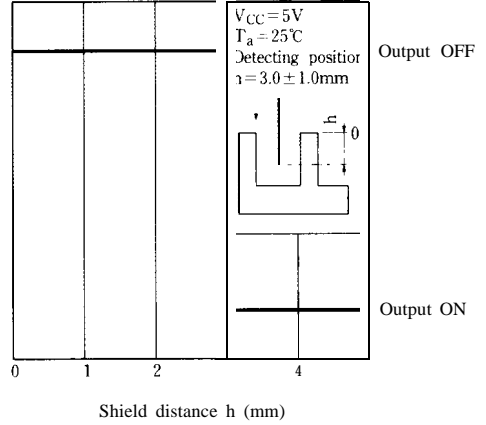

Recommended Mounting Holes (Unit : mm)

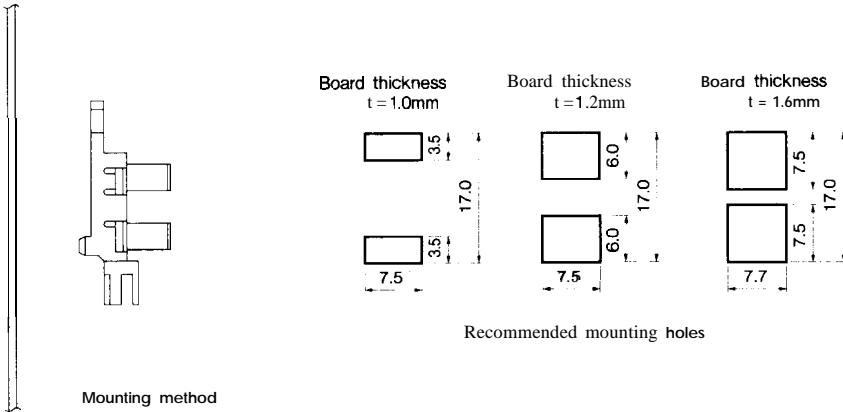

Precautions for Use

- (1) In this product, the PWB is fixed with a hook, and cleaning solvent may remain inside the case; therefore, dip cleaning or ultrasonic cleaning are prohibited.
- (2) Remove dust or stains, using an air blower or a soft cloth moistened in cleaning solvent. In this case, use only the following type of cleaning solvent used for wiping off :  
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol  
When the cleaning solvents except for specified materials are used, please consult us.
- (3) In order to stabilize power supply line, connect a by-pass capacitor of more than  $0.01 \mu F$  between  $V_{CC}$  and GND near the device.
- (4) As for other general cautions, refer to the chapter "Precautions for Use" (Page 78 to 93).

Photointerrupters