# TEMIC

## **IF Amplifier for Cable DVB Processing**

### **Description**

The U 4459 B is an integrated bipolar circuit suitable for the IF processing in cable–DVB receiver (**DVB** = **D**igital **V**ideo **B**roadcasting) and cable network application.

The circuit contains a wideband IF amplifier, mixer stage, gain control for the IF amplifier and a tuner–AGC (automatic gain control) with adjustable take over point for an additional external preamplifier (tuner).

#### **Features**

- Input frequency range 30–50 MHz (1st IF)
- Wideband IF amplifier with high linearity
- Gain control of the IF amplifier by external DC voltage
- Mixer stage with local oscillator input (symmetrical or unsymmetrical)

- High output level of mixed signal (2nd IF) (up to 2.4 V, peak to peak value)
- Tuner-AGC with adjustable take over pointfor a preamplifier
- Supply voltage range 6.8 V 13.5 V

Package: dual-inline-package (DIP 16)


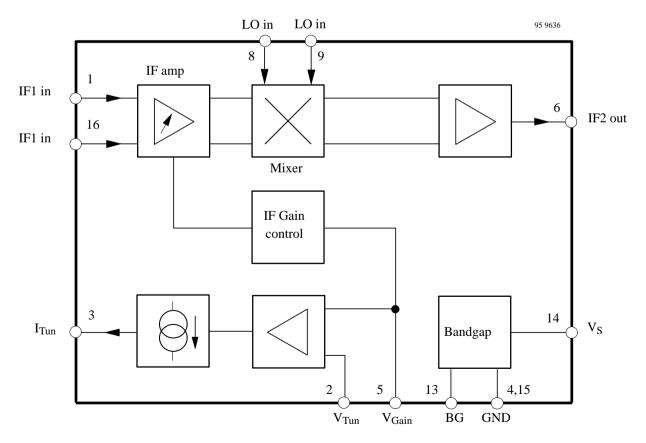


Figure 1. Block diagram

### **Pin Description**

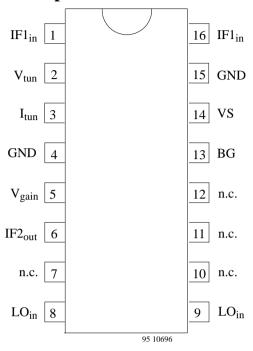

Pin	Symbol	Function
1	IF1 <sub>in</sub>	IF1 input
2	$V_{tun}$	Take over point of tuner-AGC
3	$I_{tun}$	Tuner-AGC output current
4	GND	Ground
5	$V_{gain}$	IF gain control input
6	IF2 <sub>out</sub>	IF2 output
7	nc	Not connected
8	LO <sub>in</sub>	Local oscillator input
9	LO <sub>in</sub>	Local oscillator input
10	nc	Not connected
11	nc	Not connected
12	nc	Not connected
13	BG	Bandgap reference
		(internal use only)
14	VS	Supply voltage
15	GND	Ground
16	IF1 <sub>in</sub>	IF1 input

Figure 2.

### **Circuit Description**

The U4459B consists of a controllable 3–stage wideband amplifier, a mixer, IF–AGC and a tuner–AGC with adjustable take over point. The IF1 input voltage is applied at Pin 1–16 and it is fed via a 3–stage gain controlled wideband amplifier to the mixer. The wideband amplifier with high linearity is gain controlled by external DC voltage. The oscillator voltage (Pin 8–9) for the mixer stage can be applied symmetrically as well as unsymmetrically.

The mixed signal (2nd IF) is fed through a buffer amplifier to the output Pin 6. The control voltage can be used also for an additional external preamplifier in the tuner. This tuner–AGC with adjustable take over point protects the IF1 input against overload.

#### **Absolute Maximum Values**

Reference point Pin 4, unless otherwise specified

Parameters		Symbol	Value	Unit
Supply voltage	Pin 14	$V_s$	13.5	V
Supply current	Pin 14	$I_s$	55	mA
Power dissipation		P	750	mW
$V_{s} = 13.5 \text{ V}$	Pin 14			
Junction temperature		Tjunc	+125	°C
Storage temperature		T <sub>stor</sub>	-25 to +125	°C



## **Operating Range**

Parameters		Symbol	Value	Unit
Supply voltage range	Pin 14	$V_{s}$	6.8 to 13.5	V
Ambient temperature		T <sub>amb</sub>	−25 to +70	°C

### **Thermal Resistance**

Parameters	Symbol	Value	Unit
Thermal resistance	R <sub>thia</sub>	60	K/W
junction–ambientwhen soldered to PCB	J		

### **Electrical Characteristics**

 $V_s = +8V$ ,  $T_{amb} = +25$ °C; reference point pin 4, unless otherwise specified

Parameters	Test Conditions / Pins	Symbol	Min.	Тур.	Max.	Unit	
DC-supply: Pin 14							
Supply voltage		Vs	6.8	8.0	13.5	V	
Supply current		I <sub>S</sub>		45	55	mA	
IF1 input, 1st IF:	Pin 1–10	6					
Input sensitivity (RMS	output voltage 2V	$V_{IF1}$		80	120	$\mu V_{RMS}$	
value)	(peak to peak value)						
IF1 input frequency range		fin	30		50	MHz	
Input impedance		R <sub>in</sub>		1.2		k	
Input capacitance		C <sub>in</sub>		2		pF	
IF gain control input:							
IF gain control range		GV	60	66		dB	
Local oscillator input:	Pin 8–9						
Input voltage (RMS value)		$v_{LO}$		100		mVRMS	
Input frequency range		fLO	30		50	MHz	
IF2 output, 2nd IF:	Pin 6						
DC output voltage	V5 = 3V	V <sub>DC</sub>		3.1		V	
Upper limiting level		V <sub>lim</sub>		4.5		V	
Lower limiting level		V <sub>lim</sub>		1.7		V	
IF2 signal bandwidth (– 3 dB)		В	12			MHz	
Residual carrier, fundamental wave		v <sub>res</sub>			20	mV	
Output current –source –sink		I <sub>out</sub>	1.5		5.0 2.5	mA	
Tuner-AGC						1	
Available AGC current		I <sub>tun</sub>	2.0	4.0	6.0	mA	

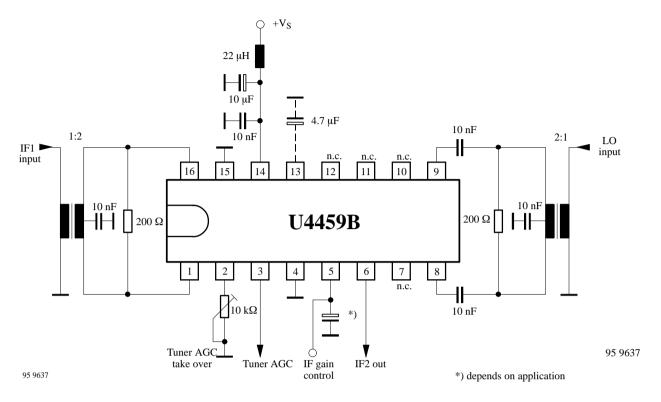


Figure 3. Test circuit

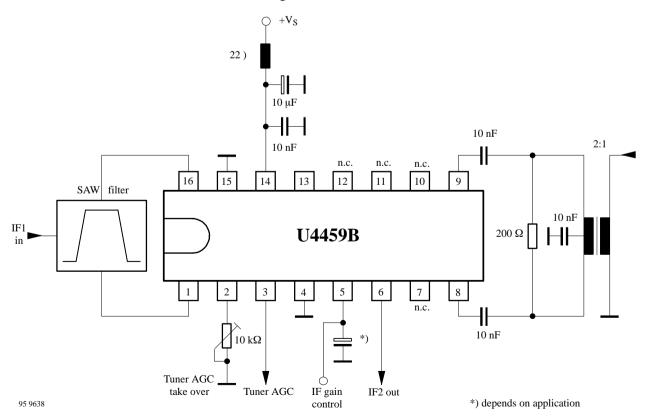


Figure 4. Basic application circuit

# TEMIC

### **Internal Pin Configuration**




Figure 5. IF1 input




Figure 6. local oscillator input




Figure 7. IF2 output




Figure 8. IF gain control input




Figure 9. Tuner-AGC take over point





Figure 10. Tuner-AGC output

### **Dimensions in mm**

Package: DIP 16

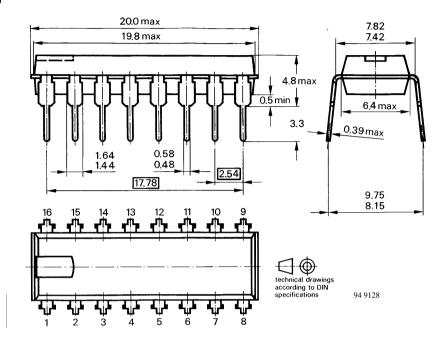

Rev. A1: 15.08.1995

### **Ozone Depleting Substances Policy Statement**

It is the policy of TEMIC TELEFUNKEN microelectronic GmbH to

- 1. Meet all present and future national and international statutory requirements.
- 2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**TEMIC TELEFUNKEN microelectronic GmbH** semiconductor division has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

- 1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
- 2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
- 3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**TEMIC** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423