


The PT4580 is a new series of 30 Watt, isolated DC to DC converters housed in a unique vertical or horizontal, 19-pin package. The 18 to 60V input range allows easy integration into many distributed power applications which utilize 24V bus architectures.

The PT4580 series is available with output voltages from 1.8V to 15V. The output voltage is adjustable from 90

to 110% of nominal with the addition of an external resistor. Other features include an inhibit function and a differential remote sense to compensate for any voltage drop between the converter and the load. The PT4580 includes built in current limit, short circuit protection and over-temperature shutdown.

A 330µF output capacitor is required for proper operation.

Standard Application

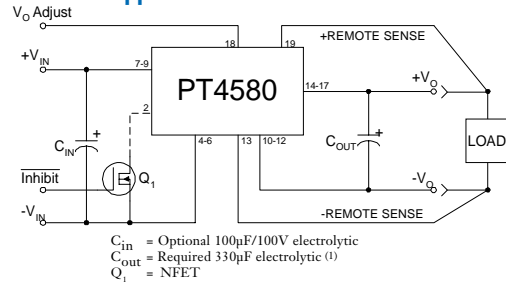

Pin-Out Information

Pin	Function	Pin	Function
1	Do Not Use	10	-V _O
2	Inhibit ⁽⁴⁾	11	-V _O
3	Do Not Use	12	-V _O
4	-V _{in}	13	-Remote Sense
5	-V _{in}	14	+V _O
6	-V _{in}	15	+V _O
7	+V _{in}	16	+V _O
8	+V _{in}	17	+V _O
9	+V _{in}	18	V _O Adjust ⁽⁴⁾
		19	+Remote Sense

Features

- Input Voltage Range: 18V to 60V
- 1500 VDC Isolation
- V_O Inhibit
- V_O Adjust
- Differential Remote Sense
- Current Limit
- Short-Circuit Protection
- Over-Temperature Shutdown
- Undervoltage Lockout
- Excalibur™ Package
- UL1950 recognized
- CSA 22.2 950 certified
- EN60950 Approved
- VDE Licensed
- Within FCC Class A Radiated Limits

Preliminary Specifications

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT4580 SERIES				
			Min	Typ	Max	Units	
Output Current	I _O	Over V _{in} range	V _O ≤ 3.3V V _O = 5V V _O = 12V	0.25 0.25 0.1	—	8.0 6.0 2.5	A A A
On/Off Standby Current	I _{in standby}	V _{in} = 24V, Pin 1 = -V _{in}	—	7	14	mA	
Short Circuit Current	I _{sc}	V _{in} = 24V	—	I _{Omax} x2	—	A	
Input Voltage Range	V _{in}	Over I _O Range	18.0	24.0	60.0	V	
Output Voltage Tolerance	ΔV _O	Over V _{in} Range T _A = -40°C to +85°C	—	±1.0	±2.0	%V _O	
Line Regulation	Reg _{line}	Over V _{in} range @ max I _O	—	±0.5	±1.0	%V _O	
Load Regulation	Reg _{load}	10% to 100% of I _O max	—	±0.5	±1.0	%V _O	
V _O Ripple/Noise	V _n	V _{in} =24V, I _O =I _O max, V _O ≥5V V _{in} =24V, I _O =I _O max, V _O <5V	—	1.0 50	2.0 75	%V _O mV _{pp}	
Transient Response	t _{tr}	50% load change, 1A/µSec V _O over/undershoot, V _O ≥5V	—	100 3.0	200 5	µSec %V _O	
Efficiency	η	V _{in} =24V, I _O =6A, V _O =3.3V V _{in} =24V, I _O =6A, V _O =5V V _{in} =24V, I _O =2.5A, V _O =12V	—	80 82 86	— — —	% % %	
Switching Frequency	f _o	Over V _{in} and I _O	V _O <10V V _O ≥10V	700 450	750 500	800 550	kHz kHz
Recommended Operating Temperature Range	T _a	V _{in} = 24V @ max I _O Airflow = 200 LFM	—	-40 ⁽¹⁾	—	+85 ⁽²⁾	°C
Storage Temperature	T _s	—	—	-40	—	+125	°C
Mechanical Shock	—	Per Mil-Std-883D, method 2002.3, 1mS, half-sine, mounted to a fixture	—	500	—	—	G's
Mechanical Vibration	—	Per Mil-Std-883D, method 2007.2, 20-2000Hz, soldered in a PC board	—	10	—	—	G's
Weight	—	—	—	40	—	—	grams
Input/Output Isolation Capacitance Resistance	—	—	—	1500	—	—	VDC pF MΩ
Flammability	—	Materials meet UL 94V-0	—	—	—	—	—
Inhibit (pin 2)	On ⁽³⁾ Off	Referenced to -V _{in}	2.5 0	—	15 0.8	VDC VDC	

Notes: (1) At temperatures below 0°C the PT4580 requires capacitors with temperature stable dielectrics, such as tantalum or Oscon.
(2) See Safe Operating Area curves, or contact the factory for the appropriate derating.
(3) If pin 2 is left open, the PT4580 will operate when input power is applied.
(4) See Application Notes at end of section.

Ordering Information

- PT4581□ = 3.3V/8A
- PT4582□ = 5.0V/6A
- PT4583□ = 12.0V/2.5A
- PT4584□ = 15.0V/2A
- PT4585□ = 1.8V/8A

PT Series Suffix (PT1234X)





Case/Pin Configuration	
Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

(For dimensions and PC board layout, see Package Styles 1400 and 1410.)





Note: This product is the subject of one or more patents. Other patents pending.

30 Watt 24V/48V Input
Isolated DC-DC Converter





PT4581, 3.3 VDC (See Note A)

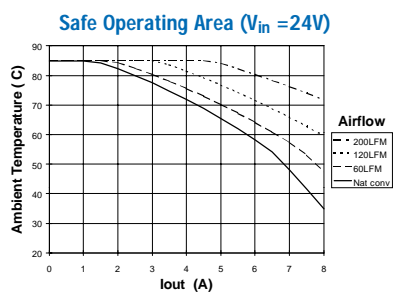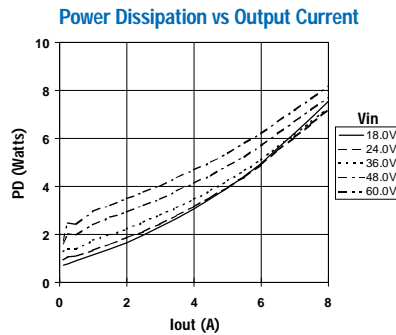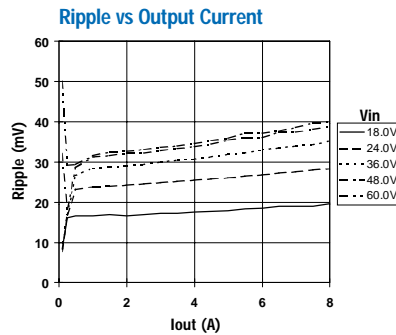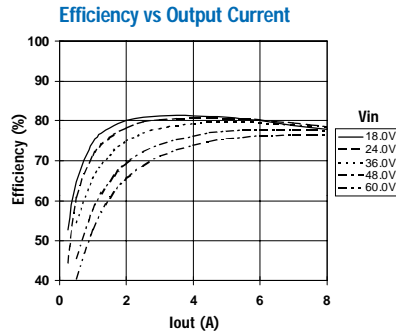

PT4582, 5.0 VDC (See Note A)

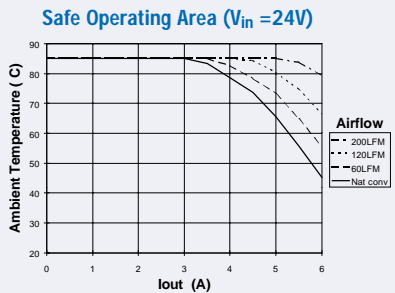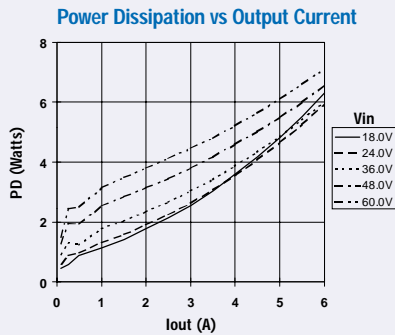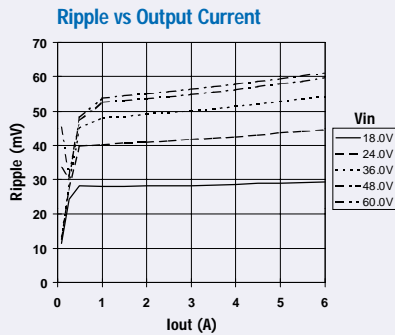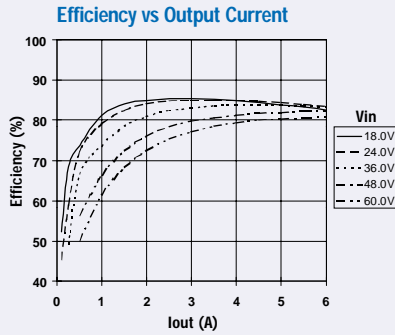

PT4583, 12.0 VDC (See Note A)

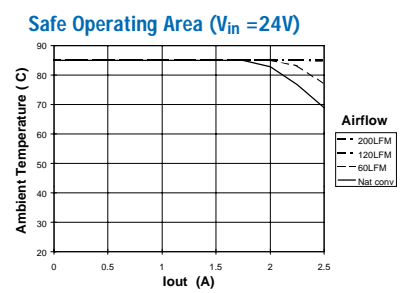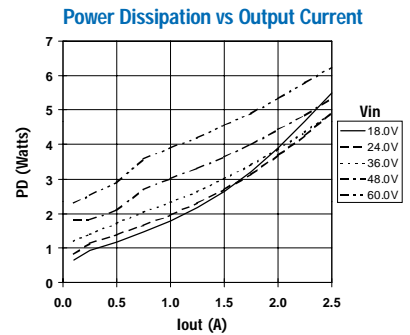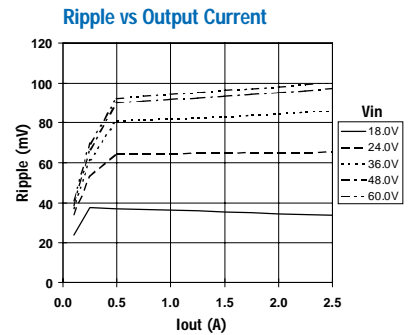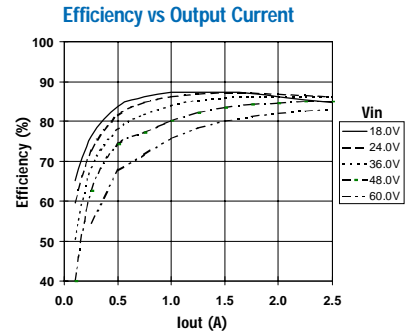

Note A: All data listed in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the DC-DC Converter.
 Note B: SOA Curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperatures.

Adjusting the Output Voltage of Power Trends' 30W Isolated DC-DC Converter Series

The factory pre-set output voltage of Power Trends' 30W series of isolated DC-DC converters may be adjusted within a nominal $\pm 10\%$ range. This is accomplished with the addition of a single external resistor. For the input voltage range specified in the data sheet, Table 1 gives the allowable adjustment range for each model as V_o (min) and V_o (max).

Adjust Up: An increase in the output voltage is obtained by adding a resistor, R2 between pin 18 (V_o adjust), and pin 13 (-Remote Sense). See note 4.

Adjust Down: Add a resistor (R1), between pin 18 (V_o adjust) and pin 19 (+Remote Sense).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor, (R1) or R2.

Notes:

1. Use only a single 1% resistor in either the (R1) or R2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors to V_o adjust. Any capacitance added to the V_o adjust control pin will affect the stability of the ISR.
3. If the remote sense pins are not being used, the resistors (R1) and R2 can be connected to $+V_{out}$ or $-V_{out}$ respectively.

4. The adjusted output voltage, V_a effectively sets the voltage across pins 13 and 19 (\pm Remote Sense). When using the remote sense pins, V_{out} (measured directly across pins 10–12, and 14–17) can be significantly higher than V_a , and may exceed V_o (max). If V_a is adjusted upward of V_o (max), the minimum input voltage is increased by the same percentage as V_{out} exceeds V_o (max).

The values of (R1) [adjust down], and R2 [adjust up], can also be calculated using the following formulas.

$$(R1) = \frac{K_o (V_a - V_r)}{V_r (V_o - V_a)} - R_s \quad k\Omega$$

$$R2 = \frac{K_o}{(V_a - V_o)} - R_s \quad k\Omega$$

Where


- V_o = Original output voltage
- V_a = Adjusted output voltage
- V_r = Reference voltage (Table 1)
- K_o = Multiplier constant (Table 1)
- R_s = Series resistance (Table 1)

Table 1

DC-DC CONVERTER ADJUSTMENT RANGE AND FORMULA PARAMETERS

Series Pt #							
AL Case:							
24V Bus				PT3341	PT3342	PT3343	PT3344
48V Bus	PT3327	PT3325	PT3326	PT3321	PT3322	PT3323	PT3324
CU Case:							
24V Bus	PT4585			PT4581	PT4582	PT4583	PT4584
48V Bus	PT4567	PT4565	PT4566	PT4561	PT4562	PT4563	PT4564
V_o (nom)	1.8V	2.0V	2.5V	3.3V	5.0V	12.0V	15.0V
V_o (min)	1.62V	1.8V	2.25V	2.95V	4.5V	10.8V	13.5V
V_o (max)	1.98V	2.2V	2.75V	3.65V	5.5V	13.2V	16.5V
V_r	1.225V	1.225V	1.225V	1.225V	1.225V	2.5V	2.5V
K_o (V-k Ω)	69.58	62.47	42.33	68.89	68.71	135.9	137.5
R_s (k Ω)	80.6	150.0	121.0	150.0	121.0	90.9	80.6

Figure 1

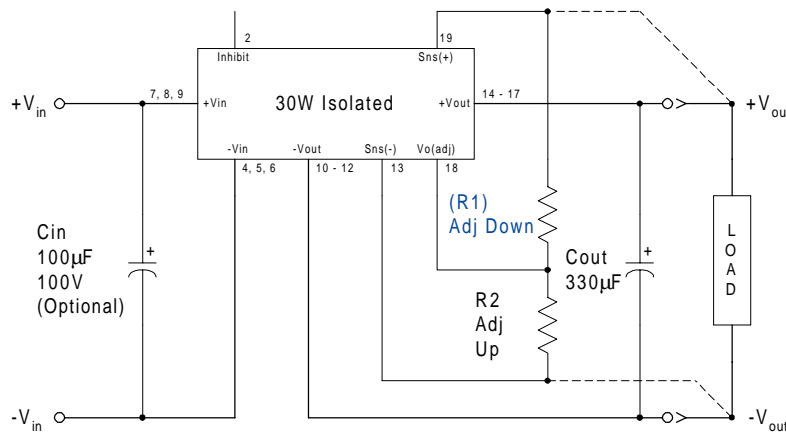

PT3320/3340/4560/4580 Series

Table 2

DC-DC CONVERTER ADJUSTMENT RESISTOR VALUES

Series Pt #					Series Pt #					Series Pt #								
AL Case					AL Case					AL Case								
24V Bus					24V Bus					24V Bus								
48V Bus					48V Bus					48V Bus								
CU Case					CU Case					CU Case								
24V Bus					24V Bus					24V Bus								
48V Bus					48V Bus					48V Bus								
Current					Current					Current								
V_0 (nom)					V_0 (nom)					V_0 (nom)								
V_a (req'd)					V_a (req'd)					V_a (req'd)								
1.65				(39.9)k Ω					4.5					10.8				(285.0)k Ω
1.7				(149.0)k Ω					4.55					11.0				(371.0)k Ω
1.75				(475)k Ω					4.6					11.2				(500.0)k Ω
1.8									4.65					11.4				(715.0)k Ω
1.85									4.7					11.6				(1150.0)k Ω
1.9									4.75					11.8				
1.95									4.8					12.0				
2.0									4.85					12.2				588.0k Ω
2.05									4.9					12.4				249.0k Ω
2.1									4.95					12.6				136.0k Ω
2.15									5.0					12.8				78.9k Ω
2.2									5.05					13.0				45.0k Ω
2.25									5.1					13.2				22.3k Ω
2.3									5.15									
2.35									5.2					13.5				(323.0)k Ω
2.4									5.25					13.6				(355.0)k Ω
2.45									5.3					13.8				(437.0)k Ω
2.5									5.35					14.0				(522.0)k Ω
2.55									5.4					14.2				(724.0)k Ω
2.6									5.45					14.4				(1010.0)k Ω
2.65									5.5					14.6				(1580.0)k Ω
2.7														14.8				
2.75														15.0				
2.95														15.2				607.0k Ω
3.0														15.4				263.0k Ω
3.05														15.6				149.0k Ω
3.1														15.8				91.3k Ω
3.15														16.0				56.9k Ω
3.2														16.5				11.1k Ω
3.25																		
3.3																		
3.35																		
3.4																		
3.45																		
3.5																		
3.55																		
3.6																		
3.65																		

R1 = (Blue)

R2 = Black

Using the Inhibit Function on the Power Trends' 30W Isolated DC-DC Converter Series

For applications requiring output voltage on/off control, the Power Trends' 30W isolated series of DC-DC converters incorporate an inhibit function. This function may be used in applications that require battery conservation, power-up/shut-down sequencing, and/or to co-ordinate the power-up of the regulator for active in-rush current control. (See the related application note, AN21).

The inhibit function is provided by the *Inhibit* control, pin2. If pin 2 is left open-circuit, the converter provides a regulated output whenever a valid source voltage⁴ is applied between +V_{in}(pins 7-9), and -V_{in} (pins 4-6). Applying a low-level ground signal² to pin 2 will disable the regulator output. The inhibit control is also compatible with some logic families. Table 1 provides details of the logic threshold requirements for the inhibit input. Figure 1 shows how either a discrete MOSFET (Q1) or a logic gate (U1a)⁵, may be referenced to the negative input voltage rail and used with the inhibit control.

Table 1 Inhibit Control Thresholds²

Parameter	min	max
Enable (V _{IH})	2.5V	15.0V (or Open Circuit) ⁵
Disable (V _{IL})	-0.3V	0.8V

Notes:

1. The inhibit control logic is similar for all Power Trends' modules, but the flexibility and threshold tolerances will be different. For specific information on this function for other converters, consult the applicable application note.
2. The inhibit control pin uses -V_{in} (pins 4-6) as its ground reference. All voltages specified are with respect to -V_{in}.
3. The inhibit control internal circuitry comprises of a high impedance 10µA current source. The open-circuit voltage may be as high as 8.3Vdc.
4. These converters incorporate an "Under Voltage Lockout" (UVLO) function. This function automatically inhibits the converter output until there is sufficient input voltage for the converter to produce a regulated output. Table 2 gives the applicable UVLO thresholds.

Table 2 UVLO Thresholds^{2/}


Series	UVLO Threshold	V _{in} Range
PT3320/4560	33 ± 2.0V	36 - 75V
PT3340/4580	15.5 ± 1.5V	18 - 60V

5. The inhibit pin may be controlled using devices with either an open-collector or differential output. With a bipolar transistor or MOSFET, select a low-leakage part (<1µA). A pull-up resistor is not necessary. If a logic gate is used a pull-up resistor may be required to the logic supply voltage, V_{dd}. This is to ensure that the gate output exceeds V_{IH}(min) (see Table 1). *Do not* use a pull-up resistor to the +V_{in} input, or drive the inhibit pin above V_{IH}(max).
6. When the converter output is disabled the current drawn

from the input supply is typically reduced to 8mA (16mA maximum).

7. Keep the on/off transition to less than 1ms. This prevents erratic operation of the ISR, whereby the output voltage may drift un-regulated between 0V and the rated output during power-up.

Figure 1

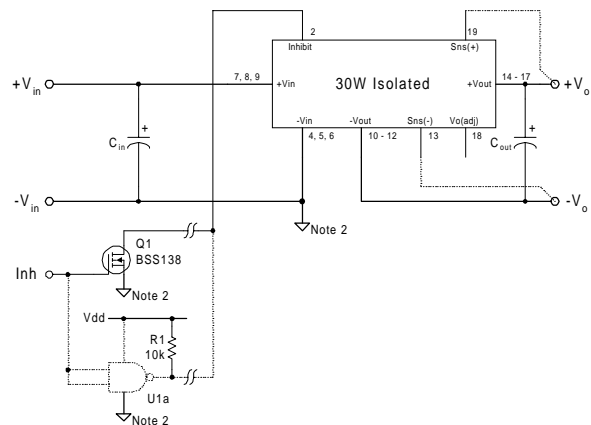

Turn-On Time: When the Inhibit pin is left open-circuit, the output of the regulator is automatically enabled when a valid input voltage⁴ is applied to the input power pins. The converter typically produces a fully regulated output voltage within 30-ms of the application of power, or the release of the inhibit pin with input power applied. The actual turn-on time will vary with the input voltage, output load, and the total amount of capacitance connected to the output. Using the circuit of Figure 1, Figure 2 shows the typical output voltage and input current waveforms of a PT3322/PT4562 after Q1 is turned off at time t = 0s. The waveform was measured with a 48Vdc input voltage, and 1-ohm resistive load.

Figure 2

