



EITEL-McCULLOUGH, INC.
SAN CARLOS, CALIFORNIA


EM15LS
INDUSTRIAL
MAGNETRON

25 kW
915 Mc.

The Eimac EM15LS is a rugged power magnetron designed specifically for industrial processing. It is designed to operate in the industrial and scientific frequency allocation of 915 ± 15 Mc. A power output of 25 kW can be obtained into a matched load at an efficiency of approximately 80%. Long operating life in severe industrial environment is assured through use of a directly heated pure tungsten spiral cathode. Further, ruggedness is assured through exclusive use of metal-ceramic construction. Every effort has been made in the design of this tube to keep water cooling pressure and purity requirements down to minimize cooling cost. The magnetic field is provided by an electromagnet which is an integral part of waveguide coupler Type H-195. This coupler mates with $9\frac{3}{4}'' \times 4\frac{7}{8}''$ waveguide.

The magnetron may be operated with a fixed magnetic field or with the electromagnet connected in series with the anode. The latter mode of operation greatly reduces the variation in output power due to supply voltage changes.

Anode voltage for the EM15LS is normally supplied from a full wave three-phase rectifier with or without filter choke. The degree of filtering in any particular application is dictated by the permissible amplitude and frequency modulation of the rf output power. These are mainly determined by the anode current ripple.

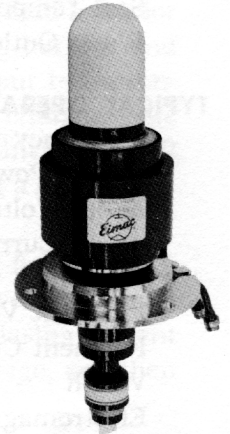

CHARACTERISTICS

ELECTRICAL

Filament:

Heating Time	- - - - -	10 seconds
Starting Voltage ($\pm 5\%$)	- - - - -	13 volts ac
Starting Current	- - - - -	115 amperes ac
Maximum Inrush Current	- - - - -	250 amperes
Cold Resistance	- - - - -	0.03 ohms
Output Power	- - - - -	25 kilowatts
Frequency	- - - - -	915 ± 15 Mc

MECHANICAL

Maximum Dimensions:

Length	- - - - -	17 inches
Diameter	- - - - -	7 inches
Weight	- - - - -	25 pounds
Output Coupling (rf)	- - - - -	(See outline drawing)
Mounting Position Preferred	- - - - -	Vertical
Cooling: Water and Forced Air		<i>Flow Rate</i> <i>Pressure Drop</i>
Anode	- - - - -	3 gpm 30 psi
Electromagnet	- - - - -	0.25 gpm 30 psi
Output Window	- - - - -	20 cfm 2" H ₂ O
Stem	- - - - -	5 cfm 2" H ₂ O

POWER SUPPLY REQUIREMENTS

Electromagnet Voltage, dc	- - - - -	50 volts
Electromagnet Current, dc	- - - - -	4 amperes
Filament Voltage, ac	- - - - -	14 volts
Filament Current, ac	- - - - -	120 amperes

hence the power changes with supply voltage variations are correspondingly reduced. This is one advantage of the series field mode of operation.

Operating points to the left of the line can be reached by supplying a biasing current through the coil. Assuming an initial biasing current, the behavior is then as follows: as the anode voltage, and hence current, rises from zero, the increasing voltage drop across the magnet coil causes a decrease in the biasing current, and a $V_a I_a$ characteristic of reduced slope* is obtained. Beyond the branch point shown in Fig. 5, the biasing current is zero and full series field behavior is obtained. The characteristic is raised or lowered in accordance with the biasing current and threshold voltage V_T , and with a fixed supply voltage this enables the power output to be controlled in an economical way by varying the magnet current. Since the slope of the characteristic depends upon the magnet coil resistance, there is a slight drift of the operating point as the coil warms up. This can be minimized by making R_b large compared with R_m or by using a bias supply which behaves as a constant current source.

With series field, anode voltage cannot be applied instantaneously without biasing field current, because a transient voltage approximately equal to the anode supply voltage is developed across the magnet coil. A recommended method of starting is therefore to increase the biasing current to raise V_T above the no load voltage of the anode supply, switch on the anode voltage, and then reduce the biasing current until the required operating point is reached.

With series field, the stability against load mismatch remains the same as that with fixed field, but the variation in anode impedance V_a/I_a , with phase of load VSWR is reduced by a self-regulating action. This leads to a power variation (see Fig. 2 for example) which is mainly determined by efficiency changes.

Precautions should be taken to prevent excessive load reflection as stipulated in the maximum ratings, since operation in unwanted modes is always possible with series field, following a cessation of oscillation in the proper mode.

5. INSTALLATION

The EM15LS is constructed from metal and ceramic. Reasonable care should be taken to protect the tube from excessive shocks when handling and after installation. The mounting position is with axis vertical, either up or down.

Connection between the magnetron and the H-195 is made by a copper washer retained on a flange on the tube at the base of the dome window. The tube must be seated squarely in the electromagnet, and the retaining screws tightened up uniformly to ensure proper contact at the washer. A new washer should be used each time the magnetron is inserted. A new washer is supplied with each new tube purchased.

The magnetron dome window is forced-cooled by air ducted over the dome by a flanged insulating cylinder. To obtain proper cooling it is necessary to ensure a uniform gap between the cylinder and dome.

The cathode terminals must be securely clamped to make proper contact and avoid overheating. Cooling is by forced air through a duct attached to the small cathode terminal. The terminal temperature should not exceed 175°C.

*In proportion to $\frac{R_b}{R_b + R_m}$, where R_b is the effective internal impedance of the biasing supply, and R_m the magnet resistance.

For additional information or information regarding a specific application, write to Eitel-McCullough, Inc., 301 Industrial Way, San Carlos, California.



ELECTROMAGNET CHARACTERISTIC


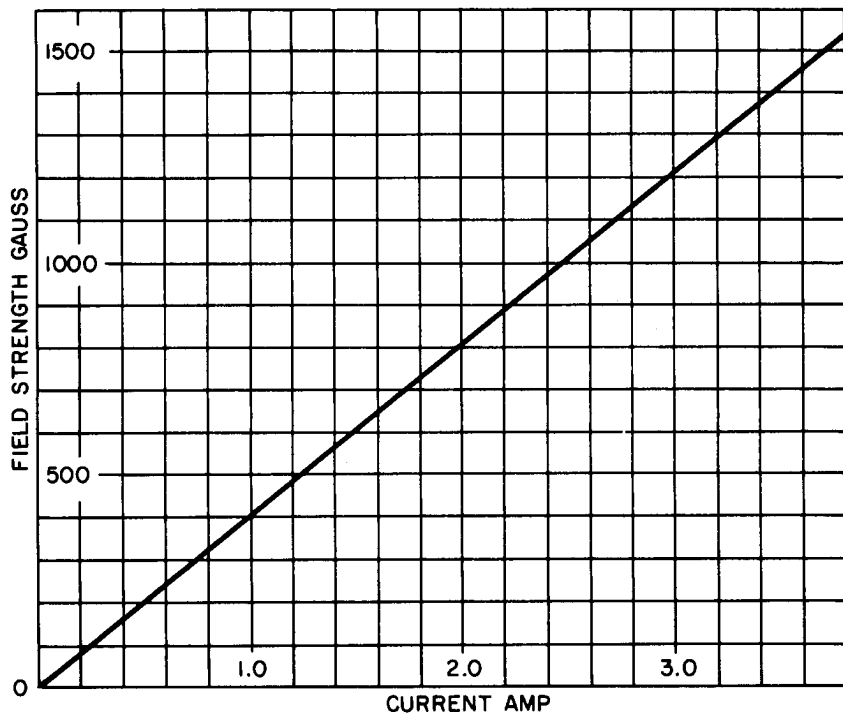


fig. 1

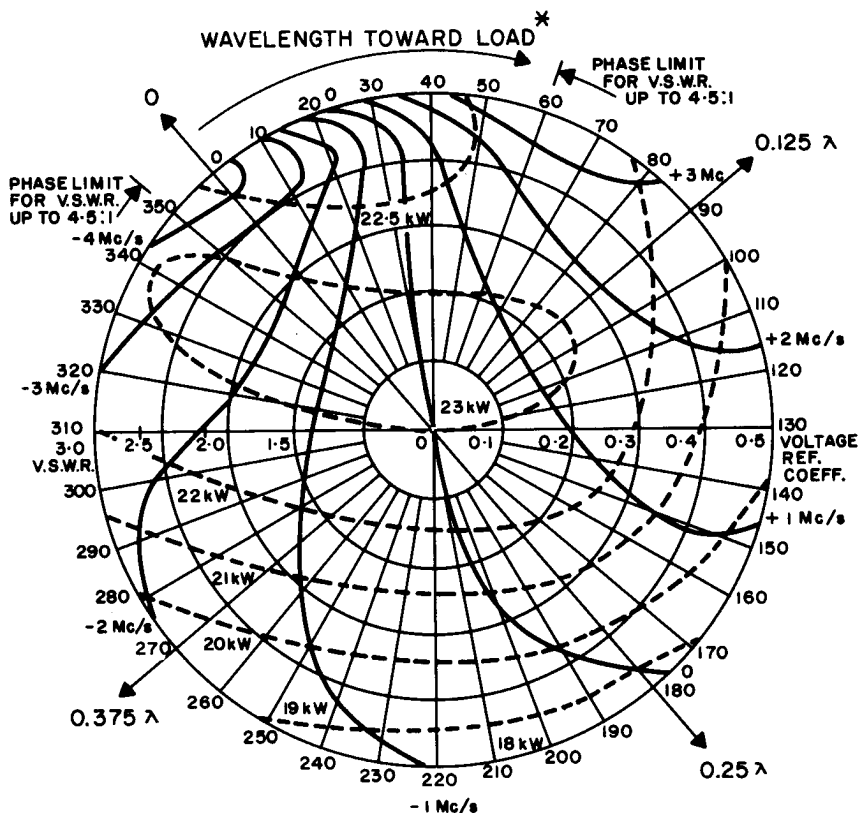

TYPICAL RIEKE DIAGRAM

fig. 2

$V_a = 12.5 \text{ kv}$
 $I_a = 2.4 \text{ a}$
 $f = 915 \text{ Mc}$

* ZERO WAVELENGTH IS AT FLANGE OF LAUNCHER AND INDICATES VOLTAGE MINIMUM AT THE FLANGE.



PERFORMANCE CHART


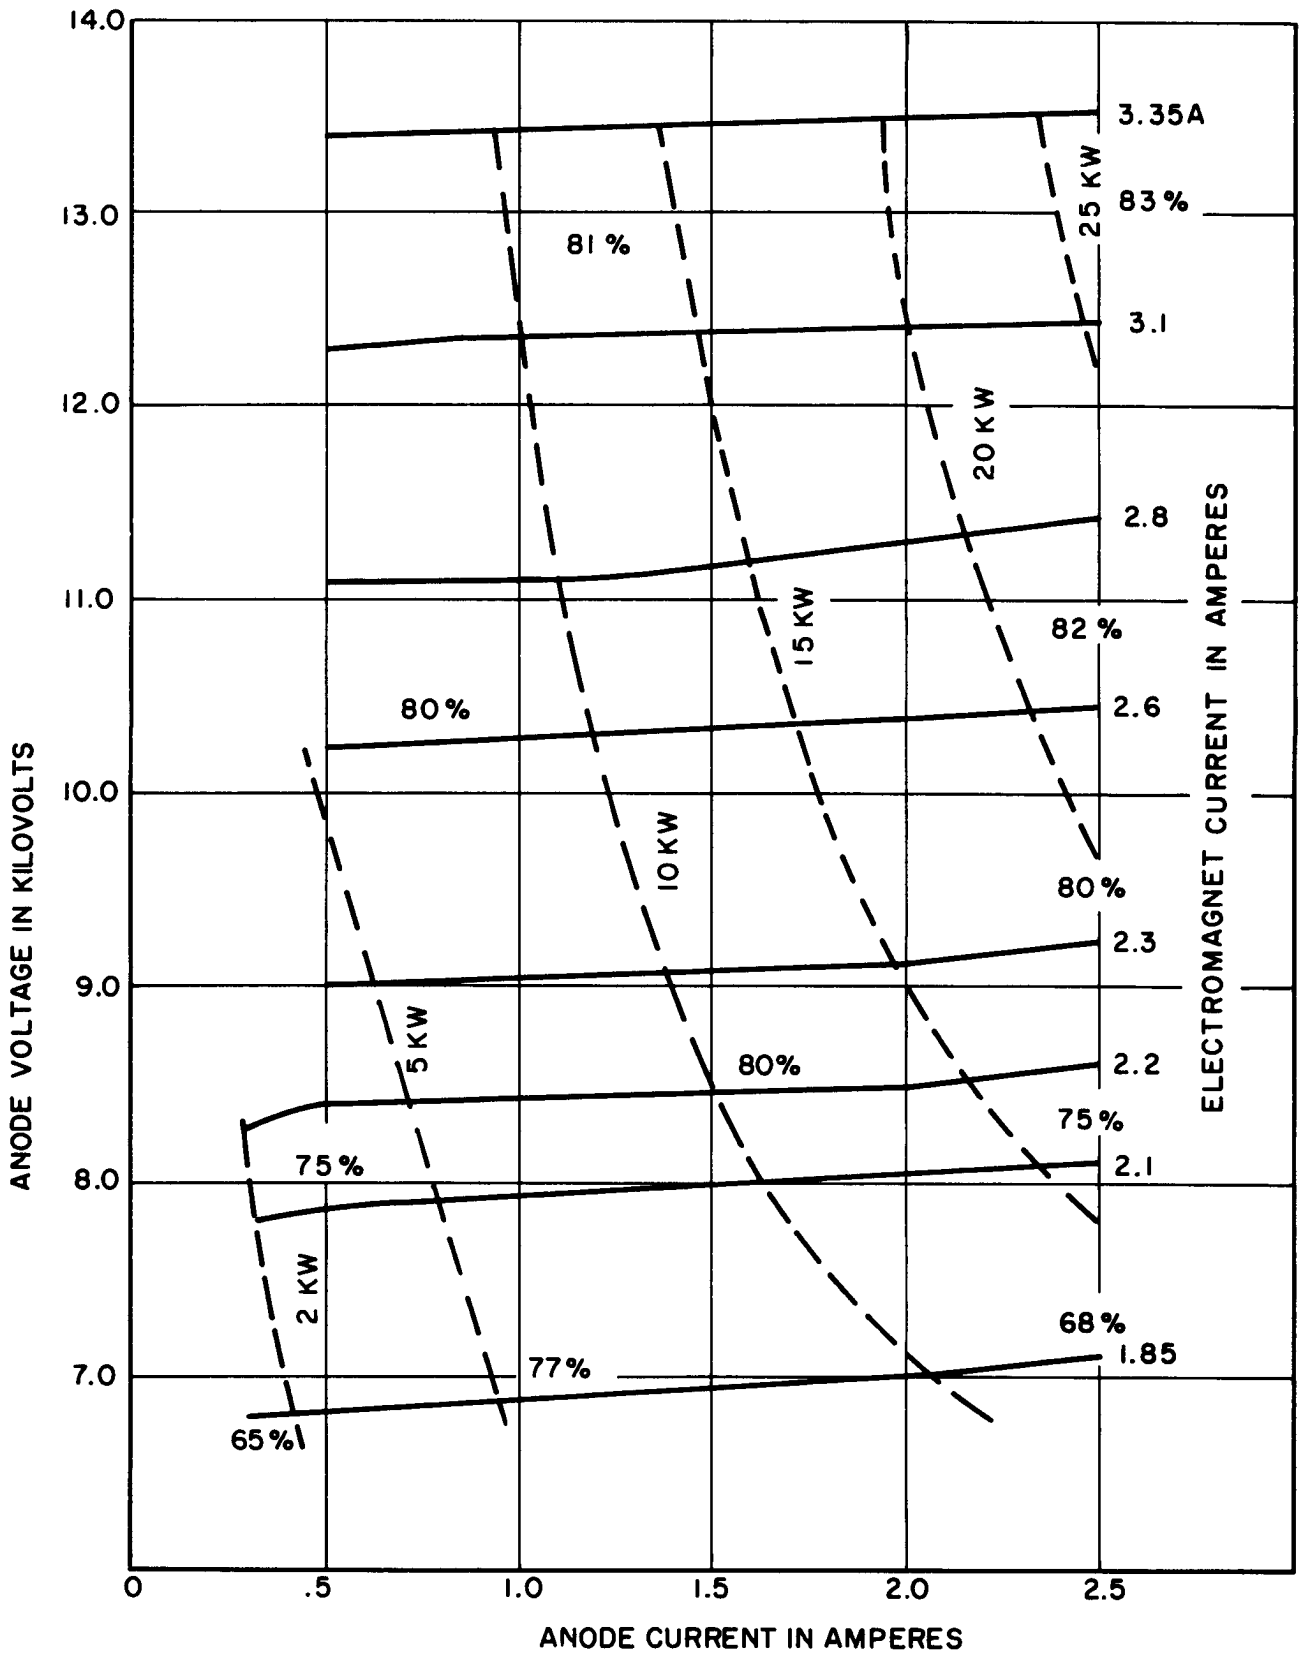


fig. 3

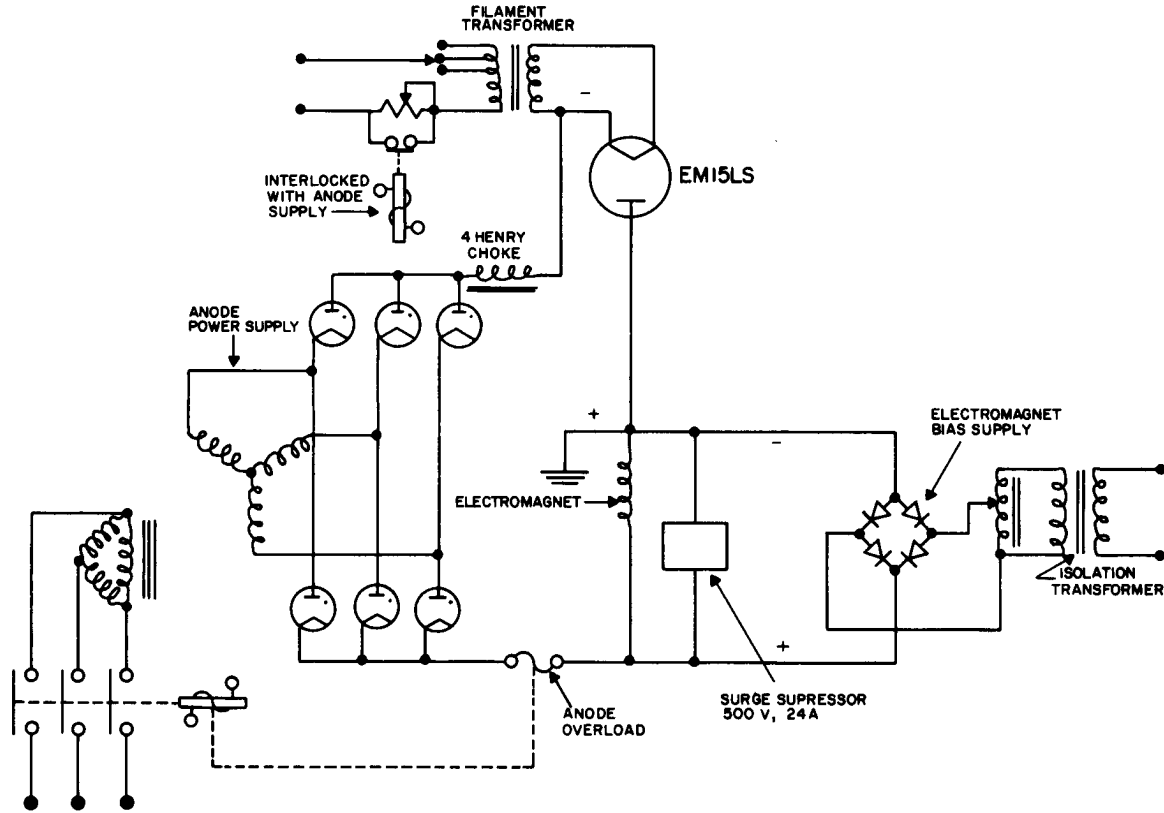

ELEMENTARY CIRCUIT FOR OPERATION WITH SERIES FIELD
fig. 4

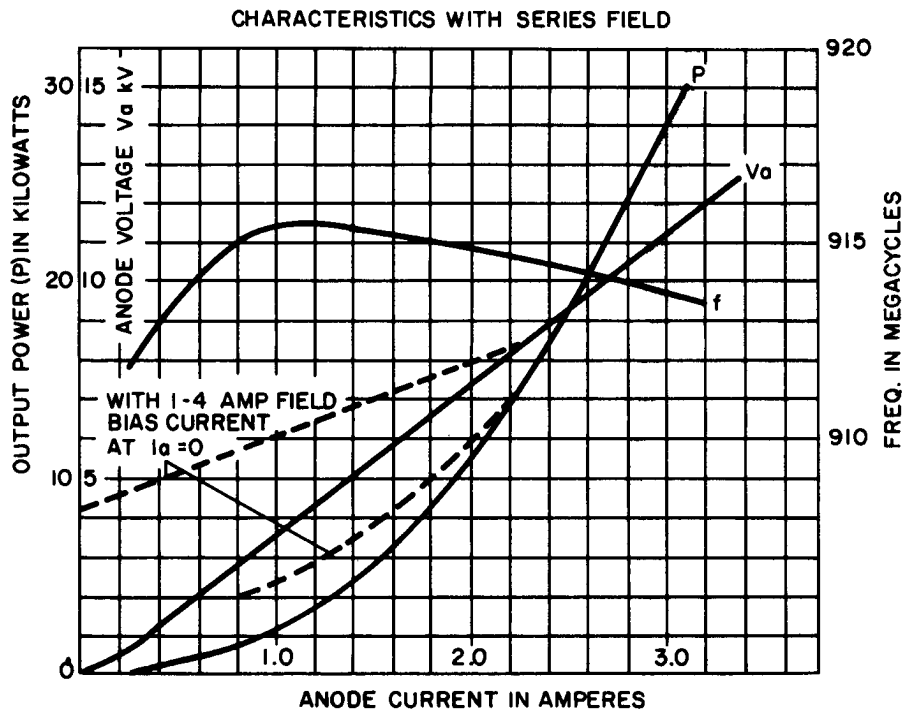



fig. 5



EM15LS

1/2 DIA. HOLES AT 120° ON 5 1/2" B.C.

125 AMP CONNECTOR 3/8" DIA. HOLES

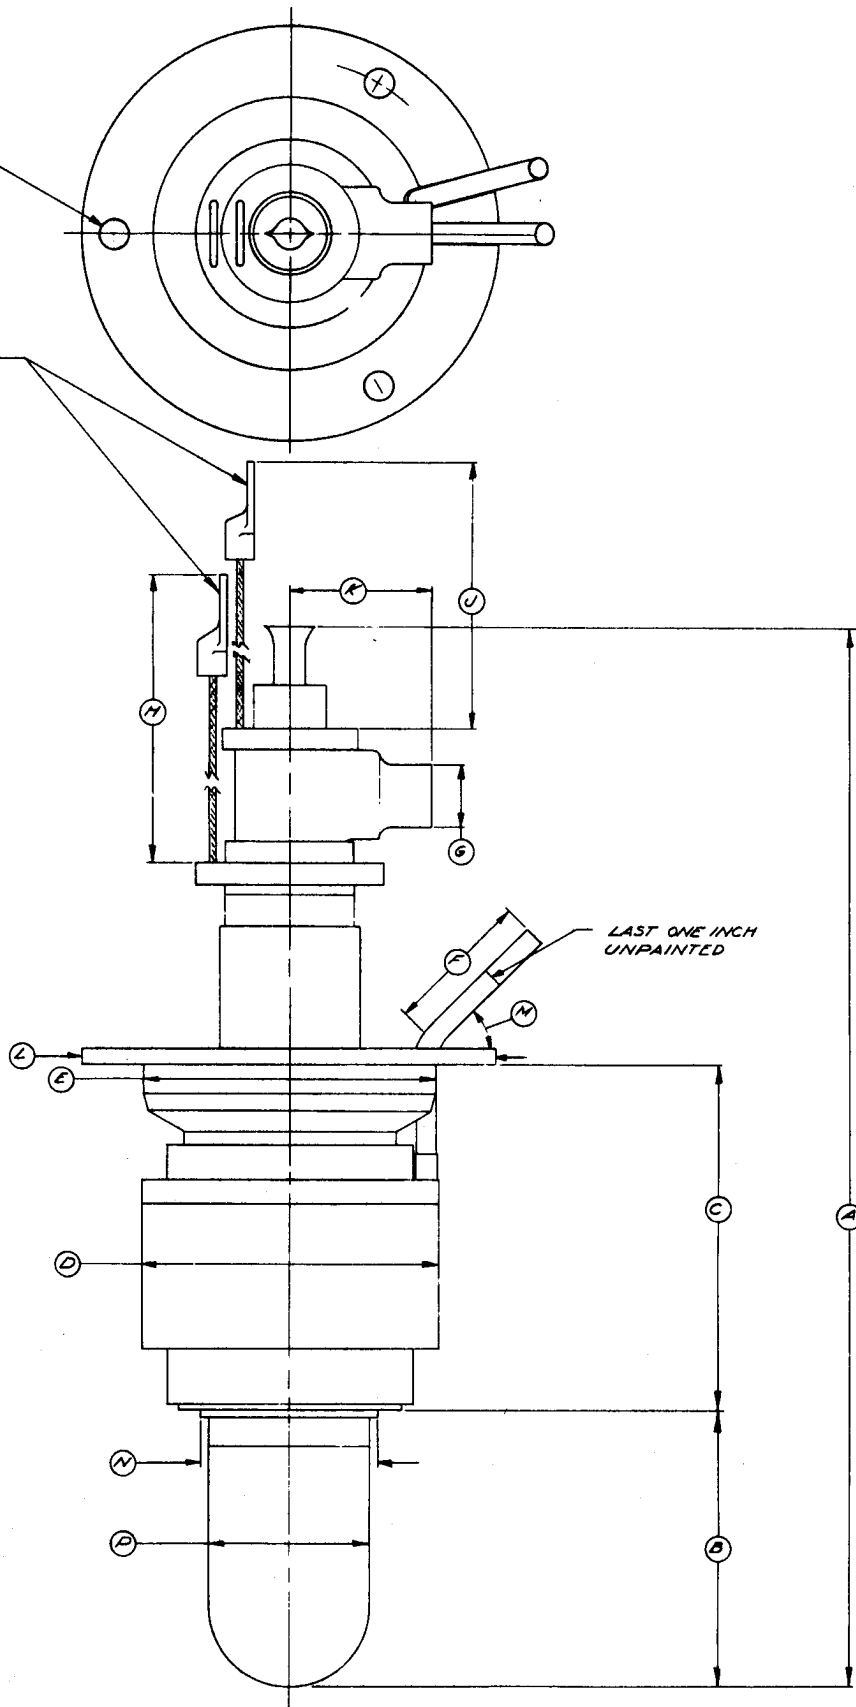

DIMENSIONS IN INCHES			
DIMENSIONAL DATA			
DIM.	MIN.	MAX.	REF.
A			16.896
B			4.715
C			5.765
D	4.855	4.905	
E	4.917	4.957	
F			2.750
G	.985	1.015	
H	10.800	11.280	
J	12.500	13.250	
K			2.460
L	6.970	7.030	
M	25°	45°	
N	2.985	3.015	
P			2.705

EM15LS MAGNETRON