

CMR1U-01M
CMR1U-02M
CMR1U-04M
CMR1U-06M
CMR1U-10M
SURFACE MOUNT
ULTRA FAST RECOVERY SILICON
RECTIFIER
1.0 AMP, 100 THRU 1000 VOLTS



CentralTM

Semiconductor Corp.

FEATURES:

- SUPERminiTM CASE
- LOW COST
- HIGH RELIABILITY
- GLASS PASSIVATED CHIP
- SPECIAL SELECTIONS AVAILABLE
- SUPERIOR LOT TO LOT CONSISTENCY
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1.0 Amp Surface Mount Ultra Fast Recovery Silicon Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications where small size is required. The SMA case occupies 30% less board space than the SMB case. To order devices on 12mm Tape and Reel (5000/13" Reel), add TR13 suffix to part number.

MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

	SYMBOL	CMR1U -01M	CMR1U -02M	CMR1U -04M	CMR1U -06M	CMR1U -10M	UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	100	200	400	600	1000	V
DC Blocking Voltage	V _R	100	200	400	600	1000	V
RMS Reverse Voltage	V _{R(RMS)}	70	140	280	420	700	V
Average Forward Current(T _A =75°C)	I _O			1.0			A
Peak Forward Surge Current (8.3ms)	I _{FSM}			30			A
Operating and Storage							
Junction Temperature	T _J , T _{stg}			-65 to +175			°C
Thermal Resistance	θ _{JL}			30			°C/W


ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I _R	V _R =Rated V _{RRM}		5.0	μA
V _F	I _F =1.0A, (CMR1U-01M, CMR1U-02M)		1.00	V
V _F	I _F =1.0A, (CMR1U-04M)		1.25	V
V _F	I _F =1.0A, (CMR1U-06M)		1.40	V
V _F	I _F =1.0A, (CMR1U-10M)		1.70	V
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A (CMR1U-01M, -02M)		35	ns
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A (CMR1U-04M)		50	ns
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A (CMR1U-06M)		75	ns
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A (CMR1U-10M)		100	ns

CMR1U-01M
CMR1U-02M
CMR1U-04M
CMR1U-06M
CMR1U-10M

**SURFACE MOUNT
ULTRA FAST RECOVERY SILICON
RECTIFIER
1.0 AMP, 100 THRU 1000 VOLTS**

SMA CASE - MECHANICAL OUTLINE

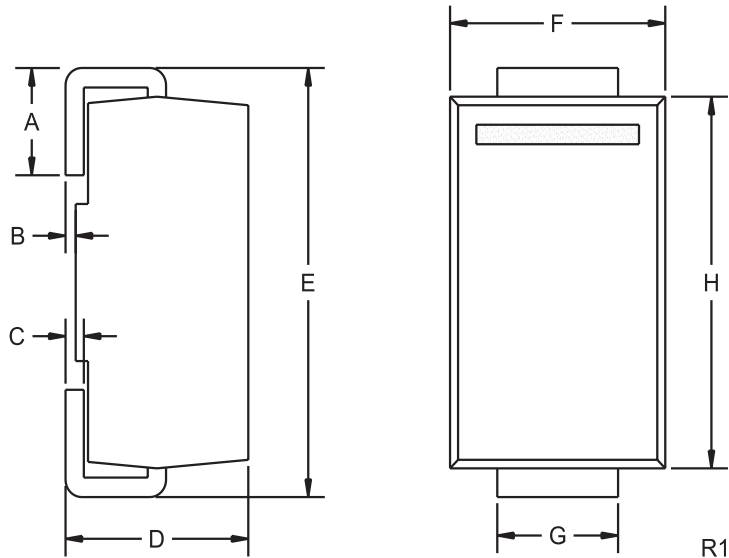

MARKING CODES

DEVICE	MARKING CODE
CMR1U-01M	CU01M
CMR1U-02M	CU02M
CMR1U-04M	CU04M
CMR1U-06M	CU06M
CMR1U-10M	CU10M

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.030	0.060	0.76	1.52
B	0.004	0.008	0.10	0.20
C	0.006	0.012	0.15	0.30
D	0.078	0.103	1.98	2.62
E	0.188	0.220	4.78	5.59
F	0.090	0.115	2.29	2.92
G	0.050	0.070	1.27	1.78
H	0.157	0.181	3.99	4.60

SMA (REV: R1)