

POWER SUPPLIES

General Purpose, 900- to 2,000-W Output

HP 6260B, 6268B, 6269B, 6274B

221

- Overvoltage protection
- Constant-voltage/constant-current operation
- Analog programmable
- Remote sensing
- Auto-series, auto-parallel, and auto-tracking operation
- $\leq 50\text{-}\mu\text{s}$ load transient recovery

HP 6260B, 6268B, and 6269B


HP 6260B, 6268B, 6269B, 6274B Power Supplies

This series of constant-voltage/constant-current power supplies employ a transistor series-regulator, triac-preregulator circuit to achieve high efficiency, excellent regulation, low ripple and noise, and moderate programming speeds in a compact, full-rack-width package.

Separate coarse and fine voltage and current controls vary output from zero to the maximum rated value. Crossover from constant voltage to constant current operation occurs automatically when the load current exceeds the value established by the current control settings.

Additional features include built-in overvoltage crowbar protection; remote sensing; and auto-series, auto-parallel, and auto-tracking operation. The crowbar trip point adjustment and associated overvoltage indicator are located conveniently on the front panel.

HP 6274B

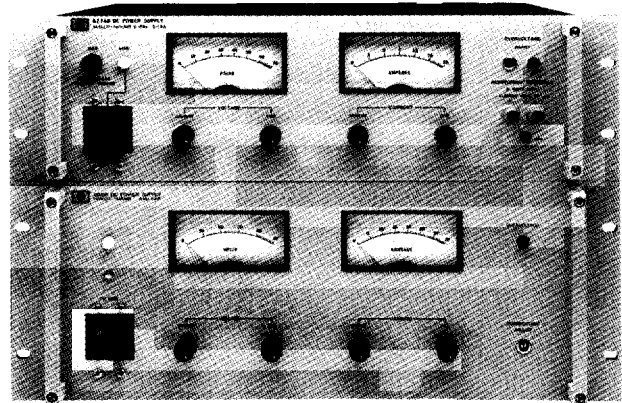

Auto-series, auto-parallel, and auto-tracking connections should be limited to three supplies. If an application requires more than three supplies in any of the three connections, consult your local HP field engineer for additional information.

All dc output, ac input, sensing, control, and programming connections are made to rear-panel terminals. Models in this series employ cooling fans. They also have terminal blocks for ac input and are shipped without line cords.

Specifications (at 0° to 55° C unless otherwise specified)

	HP 6260B	HP 6268B	HP 6269B	HP 6274B
DC output				
Volts	0 to 10 V	0 to 40 V	0 to 40 V	0 to 60 V
Amperes	0 to 100 A	0 to 30 A	0 to 50 A	0 to 15 A
Load regulation				
Voltage	0.01% + 200 μV	0.01% + 200 μV	0.01% + 200 μV	0.01% + 200 μV
Current	0.02% + 2 mA	0.02% + 2 mA	0.02% + 2 mA	0.02% + 500 μA
Line regulation				
Voltage	0.01% + 200 μV	0.01% + 200 μV	0.01% + 200 μV	0.01% + 200 μV
Current	0.02% + 2 mA	0.02% + 2 mA	0.02% + 2 mA	0.02% + 500 μA
Ripple and noise				
Voltage rms	500 μV	1 mV	1 mV	200 μV
p-p	5 mV	5 mV	5 mV	20 mV
Current rms	50 mA	20 mA	25 mA	5 mA

Load-Effect Transient Recovery: Time, 50 μs ; level, 10 mV
Resolution: Voltage control, less than 0.02%; current control, less than 0.15%

Supplemental Characteristics

Drift (stability)				
Voltage	0.03% + 2 mV	0.03% + 2 mV	0.03% + 2 mV	0.03% + 2 mV
Current	0.03% + 20 mA	0.03% + 5 mA	0.03% + 10 mA	0.03% + 5 mA
Resistance coefficient				
Voltage	200 $\Omega/\text{V} \pm 1\%$	200 $\Omega/\text{V} \pm 1\%$	200 $\Omega/\text{V} \pm 1\%$	300 $\Omega/\text{V} \pm 1\%$
Current	2 $\Omega/\text{A} \pm 10\%$	6 $\Omega/\text{A} \pm 10\%$	4 $\Omega/\text{A} \pm 10\%$	67 $\Omega/\text{A} \pm 10\%$
Voltage coefficient				
Voltage	1 V/V $\pm 1\%$	1 V/V $\pm 1\%$	1 V/V $\pm 1\%$	1 V/V $\pm 1\%$
Current	5 mV/A $\pm 10\%$	16.7 mV/A $\pm 10\%$	10 mV/A $\pm 10\%$	33.3 mV/A $\pm 10\%$
Speed, up*				
No load	70 ms	300 ms	350 ms	600 ms
Full load	70 ms	300 ms	350 ms	600 ms
Speed, down**				
No load	200 ms	1 s	1 s	40 s
Full load	75 ms	650 ms	600 ms	800 ms
Overvoltage Range	2 to 12 V	4 to 45 V	4 to 45 V	6 to 66 V
Margin	5% + 2 V	5% + 1 V	5% + 1 V	5% + 1 V
Weight				
Net	43.9 kg (97 lb)	34.4 kg (76 lb)	40.3 kg (89 lb)	21.7 kg (48 lb)
Shipping	48 kg (106 lb)	38.1 kg (84 lb)	44 kg (98 lb)	24.5 kg (54 lb)
Options	005, 010, 016, 022, 027, 040	005, 010, 022, 026, 027, 040	005, 010, 022, 027, 040	005, 010, 022, 027, 028, 040
Price	\$3,875	\$3,775	\$3,980	\$3,060

* Up: Increasing output voltage
 ** Down: Decreasing output voltage

Temperature Coefficient per °C: 0.01% of output plus 200 μV
Temperature Ratings: Operating, 0° to 55° C; storage, -40° to 75° C
DC Floating Voltage: The positive or negative output terminal can be grounded. Supplies can be floated at up to 120 V above ground.
Remote-Control Programming: These power supplies can be programmed in constant-voltage and constant-current operation by using an external resistance or dc voltage with coefficients as shown in the following table. Rear terminal wiring configurations for remote-control operation are specified in the operating and service manual supplied with the power supply. For remote-control programming procedures and timing considerations, contact your local HP field engineer.

Power: Input voltage tolerance is $\pm 10\%$, 57 to 63 Hz. For other input voltage and frequency options, see the Options list below. Standard input voltage, maximum input current, and maximum power are:

- HP 6260B 230 Vac, 12 A, 1,600 W
- HP 6268B 230 Vac, 12 A, 1,600 W
- HP 6269B 230 Vac, 18 A, 2,500 W
- HP 6274B 115 Vac, 15 A, 1,200 W

A three-terminal barrier strip is provided for ac power connections.
Regulatory Compliance: Conforms to IEC 348; carries the CE mark; HP 6274B listed to UL 1244

RFI Suppression: Complies with CISPR-11 Group 1 Class B
Size:

- HP 6260B, 6268B, and 6269B: 483 mm W \times 173 mm H \times 479.4 mm D (19 in \times 6.812 in \times 18.875 in)
- HP 6274B: 483 mm W \times 127 mm H \times 479.4 mm D (19 in \times 5.00 in \times 18.875 in)

Key Literature

1994/95 Power Products Catalog, p/n 5091-9593.

Ordering Information

Ordering Information	Price
Opt 005 50-Hz AC Input	\$0
Opt 010 Chassis Slides (for access to rack-mounted power supplies)	\$204
HP 6260B, 6268B and 6269B	\$122
HP 6274B	\$129
Opt 016 115-Vac $\pm 10\%$ Single-Phase Input (N/A 6269B)	\$71
Opt 022 Voltage and Programming Adjust	\$0
Opt 026 115-Vac $\pm 10\%$, Single-Phase Input (N/A 6269B)	\$0
Opt 027 208-Vac $\pm 10\%$, Single-Phase Input	\$0
Opt 028 230-Vac $\pm 10\%$, Single-Phase Input	\$0
Opt 040 Resistance Programming Interface (includes Opt 022)	\$92
Opt 910 Additional Operating and Service Manual	\$15