



Interface Conversion Adaptor (DVI to LVDS)

IA-573-A

User's Manual

Ver.1.01



Interface Conversion Adaptor
(DVI to LVDS)

IA-573-A
User's Manual

2005.11

Ver.1.01

ASTRODESIGN, Inc

Contents

Contents	i
Before Use	ii
Introduction.....	ii
Safety precautions.....	ii
Packing details	iii
1. Concerning the IA-573-A.....	1
1.1. Outline.....	1
1.2. Features	1
1.3. Parts and their functions.....	2
1.3.1. IA-573-A front panel	2
1.3.2. IA-573-A rear panel.....	3
2. Appendix	5
2.1. Manner of data transmission	5
2.1.1. 12bit Dual Link transmission system.....	5
2.1.2. 12bit Single Link transmission system.....	6
2.1.3. 8bit Dual Link transmission system.....	7
2.1.4. 8bit Single Link transmission system	8
2.2. Layout of connector pin	9
2.2.1. DVI digital serial input connector.....	9
2.2.2. LVDS output connector	10
2.3. Device input pin support.....	11
2.3.1. 12bit LVDS transmitter device pin support.....	11
2.3.2. 10 bit LVDS transmitter device pin support	12
2.3.3. 8 bit LVDS transmitter device pin support	13
2.4. IA-573-A specifications.....	14
2.4.1. Specifications.....	14
2.4.2. Ratings.....	14
2.4.3. Dimensional outline drawing	15

Before Use

Introduction

Thank you for purchasing this DVI-to-LVDS conversion adapter (hereafter IA-573-A). This manual contains details on the operation procedures to be followed when the IA-573-A is used, the checkpoints and precautions to be observed, and so on. Before using the IA-573-A, please read through these instructions. After reading the manual, keep it in a safe place for future reference.

Safety precautions

Improper handling may lead to malfunctioning or accidents. Before using this adapter, be absolutely sure to read through the safety precautions listed below: they will help to ensure that you will operate the adapter correctly.

■ Observe the following precautions to ensure safe operation.

⚠ WARNING	Do not spill liquids inside the adapter or drop inflammable objects or metal parts into it. Operating the adapter under these conditions may cause a fire, electric shocks and/or malfunctioning.	
⚠ CAUTION	Install the adapter in a stable location. Do not stand it on its side. Rises in temperature caused by heat generation may result in malfunctioning.	
	Do not subject the adapter to impact. Doing so may result in malfunctioning. Take sufficient care when moving the adapter.	
	When accuracy is a priority, leave the adapter for about 10 to 15 minutes after turning on its power, and wait until its operation has stabilized before starting to use it.	
	In the unlikely event that trouble has occurred, disconnect the adapter's cables, and contact your dealer or an Astrodesign sales representative.	

Packing details

The following items are included with this product.

■ Standard items

- IA-573-A
- IA-573-A instruction manual (what you are reading): 1 copy

■ Optional items


- AC adapter, SSA0515A9
- The IA-573-A is designed to run using this AC adapter.

AC adapter specifications

S-8453 specifications	
Rated output voltage (V)	5
Rated output current (A)	2
Input voltage (VAC)	100 to 240 (rating: 100)
Input power line frequency (Hz)	47 to 63 (rating: 50/60)

AC adapter plug shape

Plug shape	
EIAJ	RC-5320A
Voltage classification	2
Outside diameter D1	4.0
Inside diameter D2	1.7
Length (L)	9.5
Polarity display symbol	◇ ● ◆

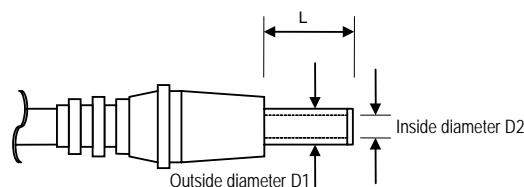

Plug shape

1.1. Outline

The IA-573-A converts DVI-D inputs into LVDS and outputs them.

1.2. Features

■ Dot clock frequency in wide band

Table 1-2-1 shows the frequency specifications of the input and output dot clocks.

Table 1-2-1 Frequency specifications

	Operation mode	DVI input (MHz)	LVDS output (MHz)
8bit	SINGLE LINK	25 to 135MHz	
10bit	Interleave mode ON	12.5 to 82.5 (Transmission rate: 25 to 135MHz)	
	Interleave mode OFF	25 to 135MHz	

* DVI cable: When a 2-meter cable made by Molex is used

■ Operation using DDC power supply enabled

The IA-573-A can be run using a DDC power supply when connected with a VG.

This obviates the need for a power cable, and enables the compactness of the adapter to be retained.

1.3. Parts and their functions

1.3.1. IA-573-A front panel

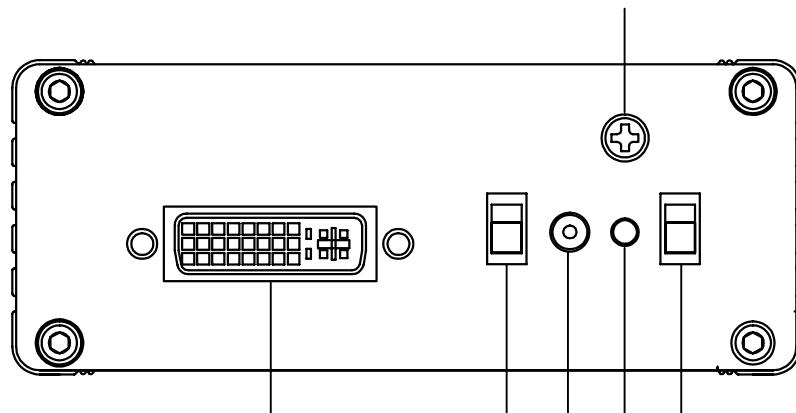


Fig. 1-3-1 Front panel

- 1 Input connector (DVI connector, Manner of transmission: TMDS)
- 2 Interleave mode selector switch: For selecting the interleave mode from ON and OFF
- 3 DC jack
- 4 LED: Lights when the power is on.
- 5 Power switch
- 6 Frame ground (FG): Connect here to share the frame ground of the equipment which is connected to the IA-573-A.



Always use the power switch to turn the power ON or OFF. Turning the power ON or OFF by connecting or disconnecting the cable may damage the adapter.

1.3.2. IA-573-A rear panel

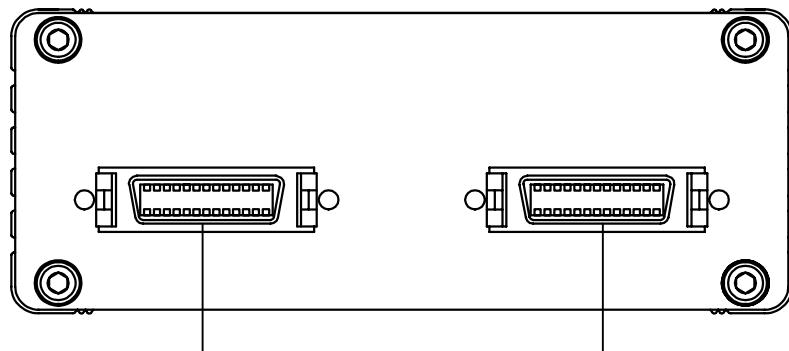


Fig. 1-3-2 Rear panel

- 1 Output connector 1 (DFP connector, Manner of transmission: LVDS)
- 2 Output connector 2 (DFP connector, Manner of transmission: LVDS)

2

Appendix

2.1. Manner of data transmission

The data will be transmitted using the interleave mode ON/OFF.

2.1.1. 12bit Dual Link transmission system

For the 12bit Dual Link transmission system, 5 TMDS lines (for data) and 1 CLK line, a total of 6 differential signals will be used. The interleave mode switch should be set OFF during the data transmission. The Figure 2-1-1 shows the 12bit Dual Link transmission system at resolution 1024 x 768, dot clock 75MHz.

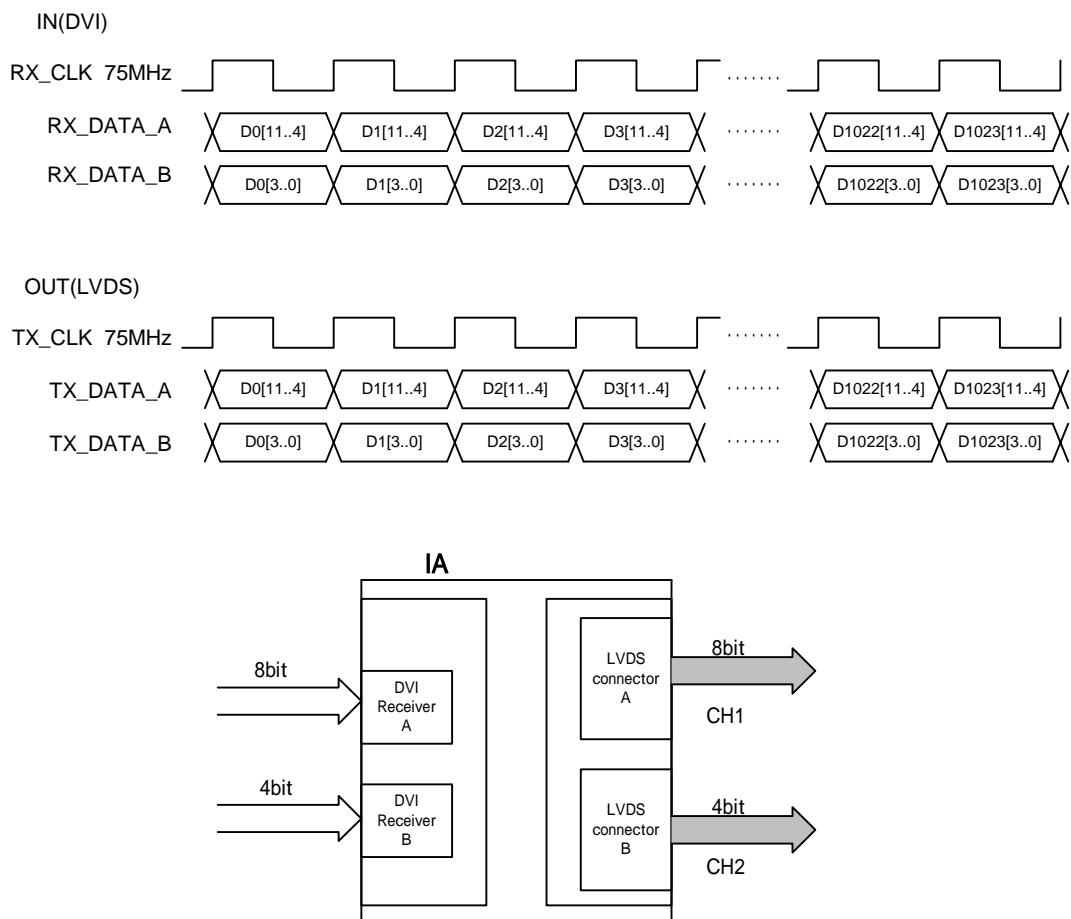


Fig. 2-1-1 12bit Dual Link data transmission system

2.1.2. 12bit Single Link transmission system

For the 12bit Single Link transmission system, 2 TMDS lines (for data) and 1 CLK line, a total of 3 differential signals will be used. The interleave mode switch should be set ON during the data transmission. The Figure 2-1-2 shows the 12bit Single Link transmission system at resolution 1024 x 768, dot clock 75MHz.

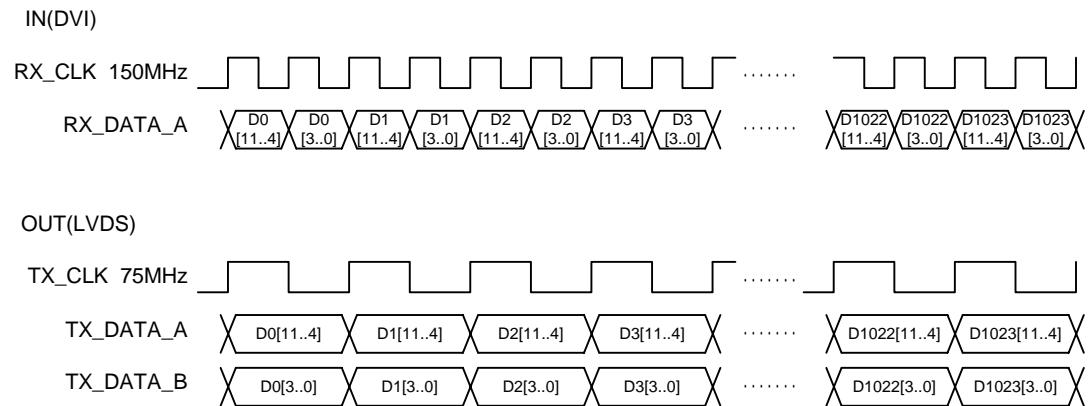


Fig. 2-1-2 12bit Single Link data transmission system

2.1.3. 8bit Dual Link transmission system

For the 8bit Dual Link transmission system, 5 TMDS lines (for data) and 1 CLK line, a total of 6 differential signals will be used. The interleave mode switch should be set OFF during the data transmission. The Figure 2-1-3 shows the 8bit Dual Link transmission system at resolution 1024 x 768, dot clock 75MHz.

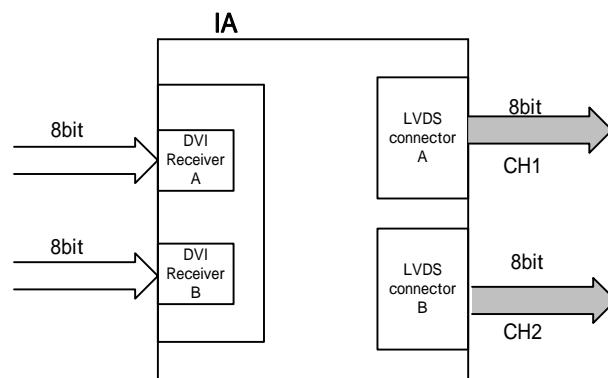
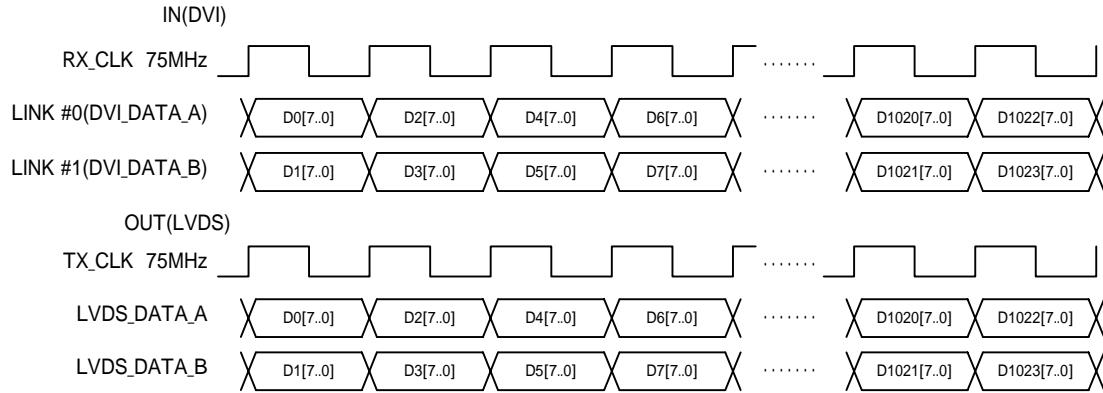


Fig. 2-1-3 8bit Dual Link data transmission system

2.1.4. 8bit Single Link transmission system

For the 8bit Single Link transmission system, 2 TMDS lines (for data) and 1 CLK line, a total of 3 differential signals will be used. The interleave mode switch should be set OFF during the data transmission. The Figure 2-1-2 shows the 8bit Single Link transmission system at resolution 1024 x 768, dot clock 75MHz.

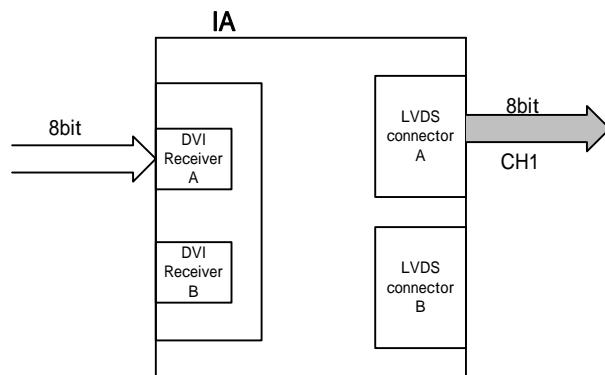
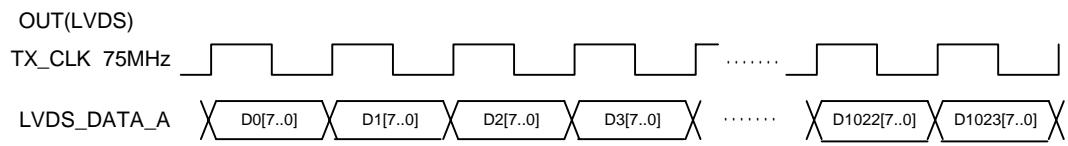
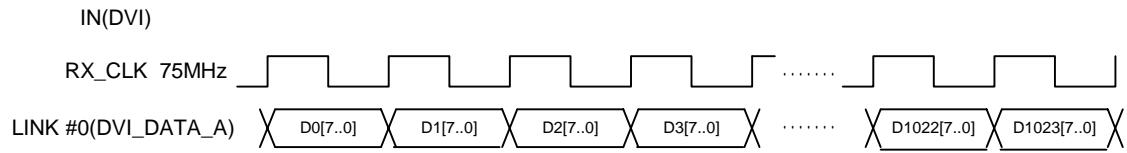


fig. 2-1-4 8bit Single Link data transmission system

2.2. Layout of connector pin

2.2.1. DVI digital serial input connector

- Connector: DVI-I (74320-1004) made by Molex
- Input signal : TMDS

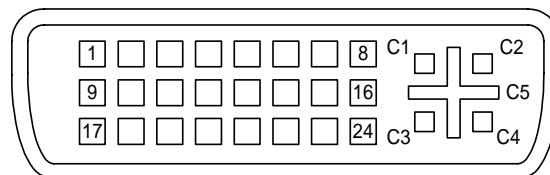


Fig. 2-2-1 Pin layout

Table 2-2-1 Pin numbers

Pin No	Signal	Pin No	Signal
1	TMDS DATA2 -	16	SENSE
2	TMDS DATA2 +	17	TMDS DATA0 -
3	TMDS DATA2/4 G	18	TMDS DATA0 +
4	TMDS DATA4 -	19	TMDS DATA0-5 G
5	TMDS DATA4 +	20	TMDS DATA5 -
6	DDC CLK	21	TMDS DATA5 +
7	DDC DATA	22	TMDS CLK G
8		23	TMDS CLK +
9	TMDS DATA1 -	24	TMDS CLK -
10	TMDS DATA1 +	C1	
11	TMDS DATA1/3 G	C2	
12	TMDS DATA3 -	C3	
13	TMDS DATA3 +	C4	
14	+ 5V	C5	
15	GND		

* TMDS DATA 0 to 2 for LINK #0, TMDS DATA 3 to 5 for LINK #1

2.2.2. LVDS output connector

- Connector: 10226-1210-VE made by 3M
- Output signal: LVDS

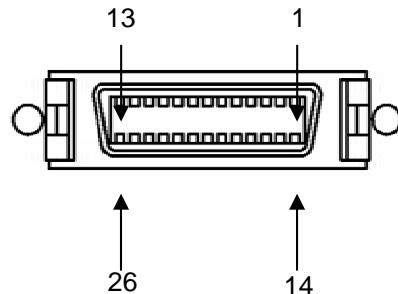


Fig. 2-2-2 Pin layout

Table 2-2-2 Pin numbers

LVDS 1CH

Pin.No	In/Out Signal	Pin.No	In/Out Signal	Pin.No	In/Out Signal
1	GND	10	TCLKG	19	TCG
2	TAG	11	+5V	20	TE-
3	SENS	12	TD-	21	TE+
4	TB-	13	TD+	22	TCLK-
5	TB+	14	TA-	23	TCLK+
6	TC-	15	TA+	24	NC
7	TC+	16	GND	25	TDG
8	TEG	17	TBG	26	GND
9	DDCSCL	18	DDCSDA		

LVDS 2CH

Pin.No	In/Out Signal	Pin.No	In/Out Signal	Pin.No	In/Out Signal
1	GND	10	TCLKG	19	TCG
2	TAG	11	+5V	20	TE-
3	SENS	12	TD-	21	TE+
4	TB-	13	TD+	22	TCLK-
5	TB+	14	TA-	23	TCLK+
6	TC-	15	TA+	24	NC
7	TC+	16	GND	25	TDG
8	TEG	17	TBG	26	GND
9	DDCSCL	18	DDCSDA		

* Maximum of 0.5A for +5V (14 pin)

2.3. Device input pin support

2.3.1. 12bit LVDS transmitter device pin support

- The table below shows the correspondence between the data output pins of the 12bit LVDS transmitter and the RGB data.
- The figure 2-3-1 shows the data transmission system
- LVDS transmitter: THC63LVD103 [THINE]

Table 2-3-1 12bit LVDS device pin support table

DVI pin assignment	LVDS pin assignment
R0 (LINK #1)	TB0 (CH2)
R1 (LINK #1)	TB1 (CH2)
R2 (LINK #1)	TA0 (CH2)
R3 (LINK #1)	TA1 (CH2)
R0 (LINK #0)	TD0 (CH1)
R1 (LINK #0)	TD1 (CH1)
R2 (LINK #0)	TA0 (CH1)
R3 (LINK #0)	TA1 (CH1)
R4 (LINK #0)	TA2 (CH1)
R5 (LINK #0)	TA3 (CH1)
R6 (LINK #0)	TA4 (CH1)
R7 (LINK #0)	TA5 (CH1)
G0 (LINK #1)	TB2 (CH2)
G1 (LINK #1)	TB3 (CH2)
G2 (LINK #1)	TA2 (CH2)
G3 (LINK #1)	TA3 (CH2)
G0 (LINK #0)	TD2 (CH1)
G1 (LINK #0)	TD3 (CH1)
G2 (LINK #0)	TA6 (CH1)
G3 (LINK #0)	TB0 (CH1)
G4 (LINK #0)	TB1 (CH1)
G5 (LINK #0)	TB2 (CH1)
G6 (LINK #0)	TB3 (CH1)
G7 (LINK #0)	TB4 (CH1)
B0 (LINK #1)	TB4 (CH2)
B1 (LINK #1)	TB5 (CH2)
B2 (LINK #1)	TA4 (CH2)
B3 (LINK #1)	TA5 (CH2)
B0 (LINK #0)	TD4 (CH1)
B1 (LINK #0)	TD5 (CH1)
B2 (LINK #0)	TB5 (CH1)
B3 (LINK #0)	TB6 (CH1)
B4 (LINK #0)	TC0 (CH1)
B5 (LINK #0)	TC1 (CH1)
B6 (LINK #0)	TC2 (CH1)
B7 (LINK #0)	TC3 (CH1)
HS (LINK #0)	TC4 (CH1)
VS (LINK #0)	TC5 (CH1)
DISP (LINK #0)	TC6 (CH1)

2.3.2. 10 bit LVDS transmitter device pin support

- The table below shows the correspondence between the data output pins of the 10bit LVDS transmitter and the RGB data.
- The figure 2-3-1 shows the data transmission system
- LVDS transmitter: THC63LVD103 [THINE]

Table 2-3-2 10bit LVDS device pin support table

DVI pin assignment	LVDS pin assignment
R0 (LINK #1)	TA0 (CH2)
R1 (LINK #1)	TA1 (CH2)
R0 (LINK #0)	TD0 (CH1)
R1 (LINK #0)	TD1 (CH1)
R2 (LINK #0)	TA0 (CH1)
R3 (LINK #0)	TA1 (CH1)
R4 (LINK #0)	TA2 (CH1)
R5 (LINK #0)	TA3 (CH1)
R6 (LINK #0)	TA4 (CH1)
R7 (LINK #0)	TA5 (CH1)
G0 (LINK #1)	TA2 (CH2)
G1 (LINK #1)	TA3 (CH2)
G0 (LINK #0)	TD2 (CH1)
G1 (LINK #0)	TD3 (CH1)
G2 (LINK #0)	TA6 (CH1)
G3 (LINK #0)	TB0 (CH1)
G4 (LINK #0)	TB1 (CH1)
G5 (LINK #0)	TB2 (CH1)
G6 (LINK #0)	TB3 (CH1)
G7 (LINK #0)	TB4 (CH1)
B0 (LINK #1)	TA4 (CH2)
B1 (LINK #1)	TA5 (CH2)
B0 (LINK #0)	TD4 (CH1)
B1 (LINK #0)	TD5 (CH1)
B2 (LINK #0)	TB5 (CH1)
B3 (LINK #0)	TB6 (CH1)
B4 (LINK #0)	TC0 (CH1)
B5 (LINK #0)	TC1 (CH1)
B6 (LINK #0)	TC2 (CH1)
B7 (LINK #0)	TC3 (CH1)
HS (LINK #0)	TC4 (CH1)
VS (LINK #0)	TC5 (CH1)
DISP (LINK #0)	TC6 (CH1)

2.3.3. 8 bit LVDS transmitter device pin support

- The table below shows the correspondence between the data output pins of the 8bit LVDS transmitter and the RGB data.
- The figure 2-3-1 shows the data transmission system
- LVDS transmitter: THC63LVD103 [THINE]

Table 2-3-3 8bit LVDS device pin support table

DVI pin assignment	LVDS pin assignment
R0 (LINK #0)	TD0 (CH1)
R1 (LINK #0)	TD1 (CH1)
R2 (LINK #0)	TA0 (CH1)
R3 (LINK #0)	TA1 (CH1)
R4 (LINK #0)	TA2 (CH1)
R5 (LINK #0)	TA3 (CH1)
R6 (LINK #0)	TA4 (CH1)
R7 (LINK #0)	TA5 (CH1)
G0 (LINK #0)	TD2 (CH1)
G1 (LINK #0)	TD3 (CH1)
G2 (LINK #0)	TA6 (CH1)
G3 (LINK #0)	TB0 (CH1)
G4 (LINK #0)	TB1 (CH1)
G5 (LINK #0)	TB2 (CH1)
G6 (LINK #0)	TB3 (CH1)
G7 (LINK #0)	TB4 (CH1)
B0 (LINK #0)	TD4 (CH1)
B1 (LINK #0)	TD5 (CH1)
B2 (LINK #0)	TB5 (CH1)
B3 (LINK #0)	TB6 (CH1)
B4 (LINK #0)	TC0 (CH1)
B5 (LINK #0)	TC1 (CH1)
B6 (LINK #0)	TC2 (CH1)
B7 (LINK #0)	TC3 (CH1)
HS (LINK #0)	TC4 (CH1)
VS (LINK #0)	TC5 (CH1)
DISP (LINK #0)	TC6 (CH1)

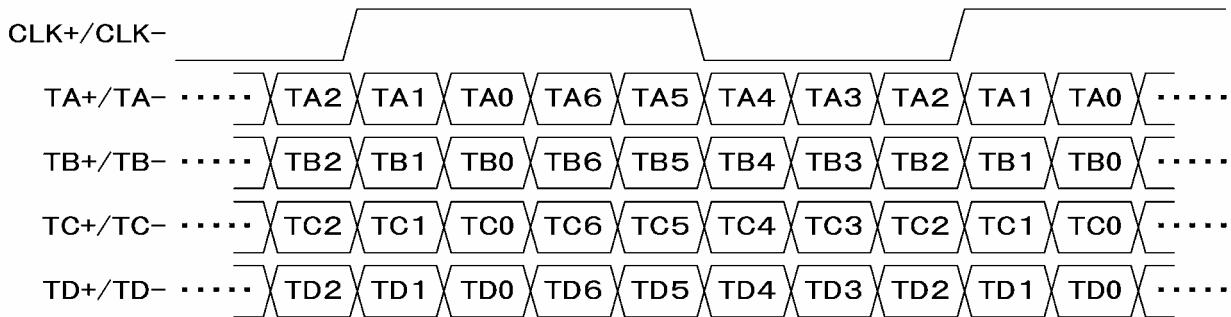


Fig. 2-3-2 Data transmission system

2.4. IA-573-A specifications

2.4.1. Specifications


	8bit	SINGLE LINK	25 to 135MHz	
Dot clock frequency	10bit	Interleave mode ON	12.5 to 82.5 (Transmission rate: 25 to 135MHz)	
		Interleave mode OFF	25 to 135MHz	
VI Input		Compliant with DVI 1.0		
LVDS Output		Compliant with DISM 1.0		

*1: Use of the 2-meter cable made by Molex is recommended as the DVI cable.

2.4.2. Ratings

Supply voltage	DC5V
Power consumption	3.5W MAX
Dimensions	100(W)×100(H)×40(D)mm (excluding projections)
Weight	Approx. 0.5 kg
Operating temperature	5 to 40°C
Storage temperature	-10 to 60°C
Humidity	30 to 85%RH (no condensation)

2.4.3. Dimensional outline drawing

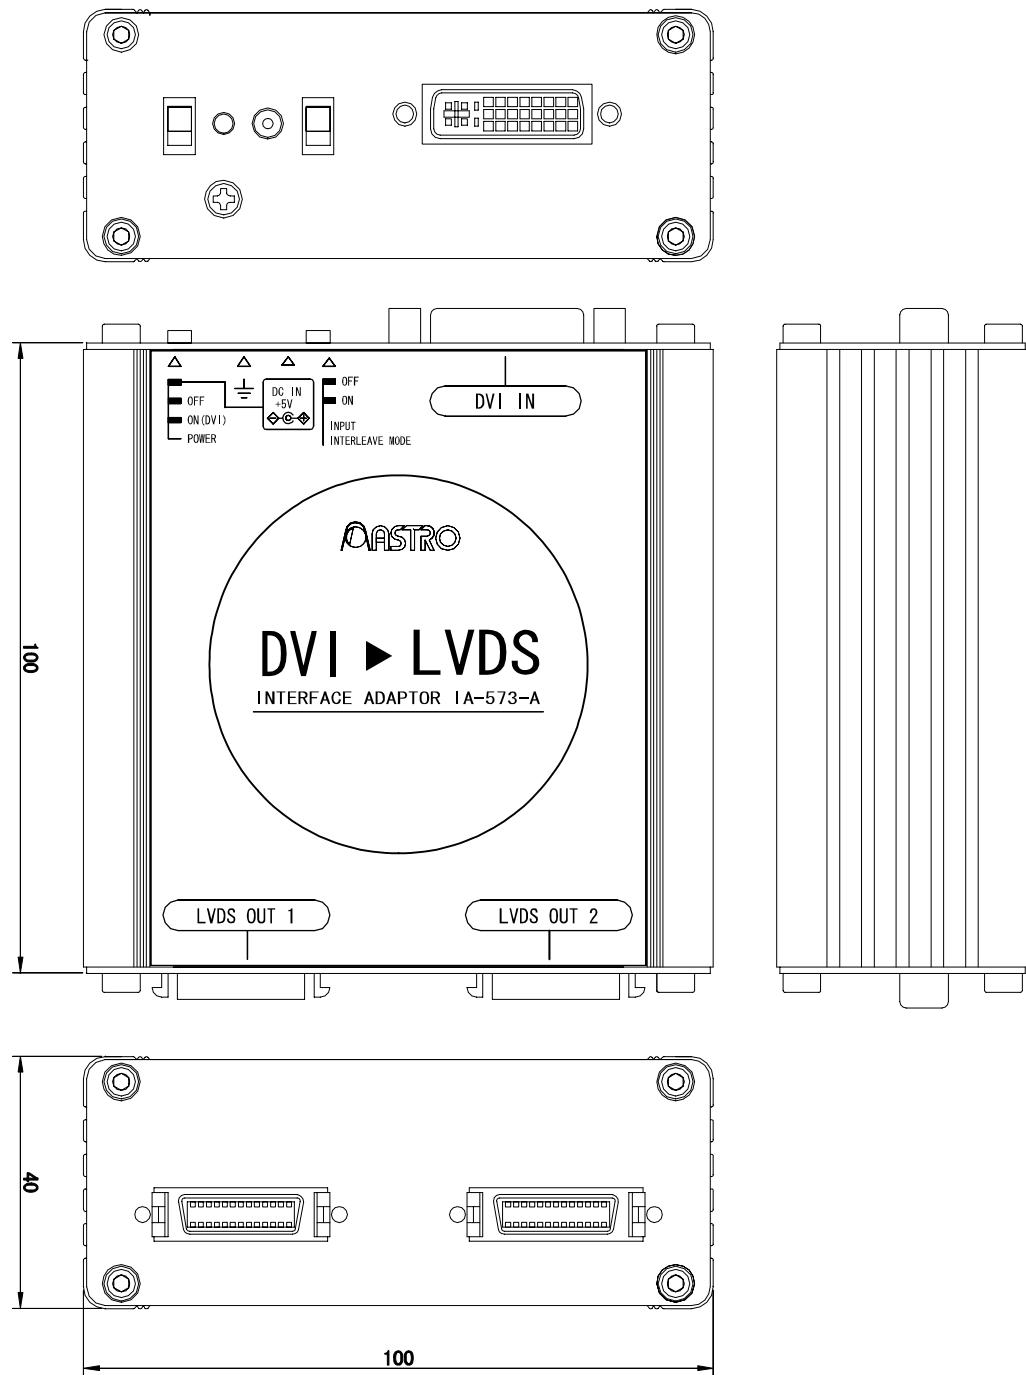



IA-573-A

User's Manual

Notes:

Documents with missing or incorrectly collated pages will be replaced.

The copyright of this product belongs to ASTRODESIGN, Inc.

No part of this document may be used or reproduced without permission.

The contents of this document are subject to revision without notice.

ASTRODESIGN shall not be responsible for any damages resulting from misuse.

For additional information relating to this product, contact your local dealer or ASTRODESIGN at the address listed below.

All other products or product names listed in this document are trademarks or registered trademarks of their respective companies.

T0078

ASTRODESIGN, INC.

URL <http://WWW.astrodesign.co.jp>

First Sales Division
2-6-17 Haramachi, Meguro-ku, Tokyo, Japan 152-0011
Tel: (03) 5720-5838, Fax: (03) 5720-6353

Osaka Sales Office
1-18-27-1010 Higashi-Nakajima, Higashi-Yodogawa-ku,
Osaka, Japan 533-0033
Tel: (06) 6328-8558, Fax: (06) 6328-5058