

MD1230B

Data Quality Analyzer




Versatile Applications

1. IP Network Equipment Evaluation

- (1) High-density Switch Performance Evaluation
- (2) Automated Switch Performance Measurement
- (3) Interoperability Verification
- (4) Physical Layer Measurement

2. Network System Verification

- (1) PON System Verification
- (2) IPTV Streaming Service Verification
- (3) Carrier Class Network Service Verification

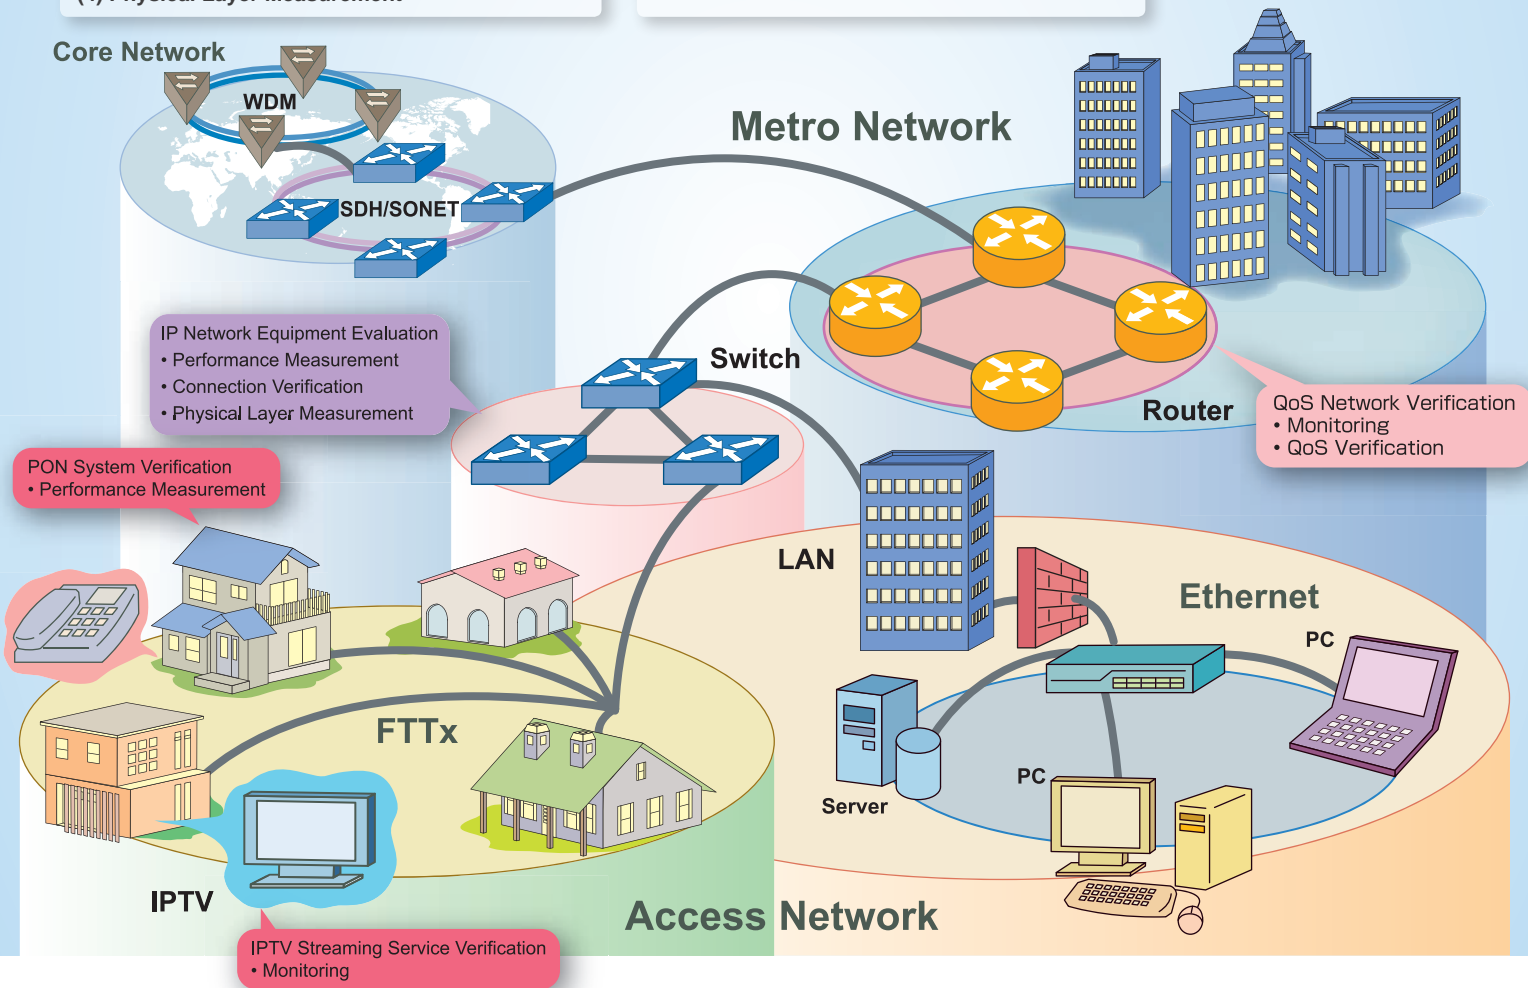

The MD1230B Data Quality Analyzer is a group of IP/Ethernet measuring instruments covering the increasingly active field of next-generation networks. The family supports the full range of access and metro network applications, including PON system verification, IP network equipment evaluation, network QoS verification, and IPTV streaming service verification. In addition, the products combine all the functions required for performance evaluation of IP network equipment and network systems in all-in-one platform, offering a high-efficiency measurement environment with integrated operations. The MD1230B is the Anritsu solution of choice for all your next-generation network measurement needs.

MD1230B

Data Quality Analyzer






Application Examples

1. IP Network Equipment Evaluation

High-Density Switch Performance Measurements

One MD1230B unit supports control and measurement of up to 60 ports, respectively. Therefore, all 48 ports of the highest-density 1U switch can be load-tested simultaneously, providing a small footprint, cost savings, and effective return on investment.

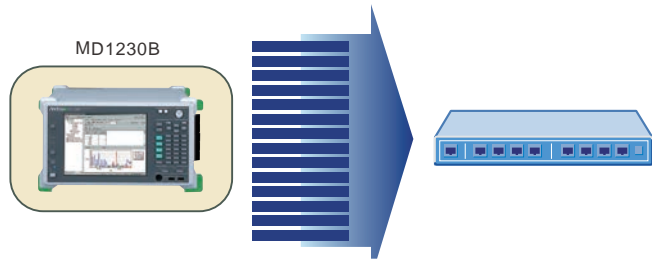

Automatic Switch Performance Measurement

One-button, IETF RFC 2544 and RFC 2889-compliant automatic performance testing [Option 10] supports automatic display of measurement results, shortening evaluation times and improving work efficiency.

VLAN networks are supported as well.

RFC 2544 Throughput Result

RFC 2889 Result

Connection Verification


The following functions make network configuration pre-verification interoperability checks and fault troubleshooting easier, while elimination of link faults improves network connection reliability.

<Link Test>

Repeatedly forcing the link on and off permits verification of equipment operation during a Link Flap situation.

<Auto Negotiation Analysis> [Option 15]

The auto negotiation connection status is easily analyzed using the Sequence Capture and Decode functions to improve the validity of interoperability test verification.

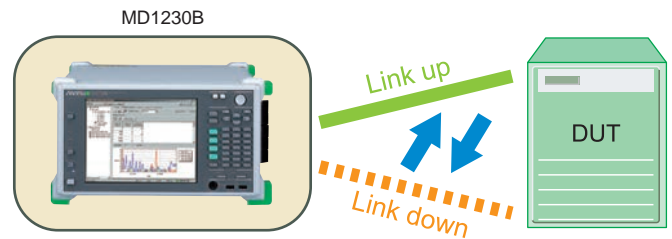

Physical Layer Measurements

Verification of signal transmission quality is key to improving network reliability. The variable measurement clock (± 100 ppm) and clock monitoring functions of the Clock Measurement Option [MU120131A/132A/138A-01], as well as the error insertion and error measurement functions of the BER Measurement Option [Option 11], support this verification to assure high-reliability operation at the equipment physical layer.

MD1230B

DUT

Packet Structure:

- Preamble 8 bytes
- Header
- Single PRBS9 PRBS23, 31
- FCS 4 bytes
- IFG

Error Insertion

Type: Cross PRBS Error

Timing: Rate


Rate: 1E-3

Programmed Rate: 1E-3

2. Network System Verification

PON System Verification


A single MD1230B unit can control a simultaneous end-to-end evaluation of a 32-branch PON system. Each unit also supports OAM analysis by capturing and decoding E-PON system frames for verification of PON functions.

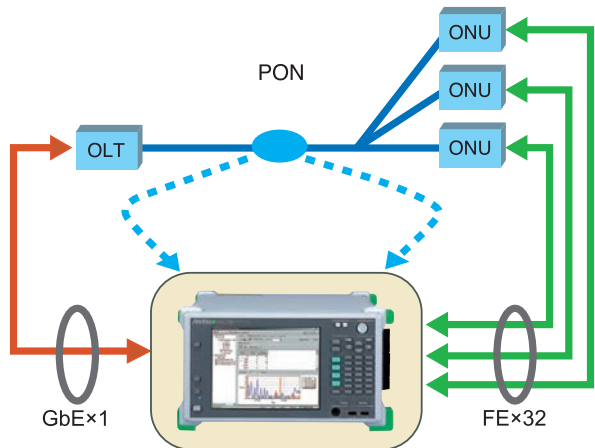

IPTV Streaming Service Verification

High-Resolution Traffic Monitor


Previous measuring instruments (with 1-s resolution) are inadequate for analyzing burst data that can impact the quality of streaming services. However, the Application Traffic Monitor [Option 20] provides monitoring of burst data with 1 ms resolution for realtime oscilloscope-type analysis that could not be performed previously.

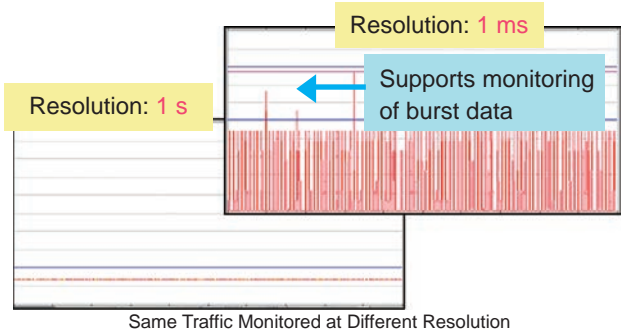

Same Traffic Monitored at Different Resolution

Delay Time Distribution (Packet Jitter)


Packet jitter impacting the quality of real-time services can be monitored.

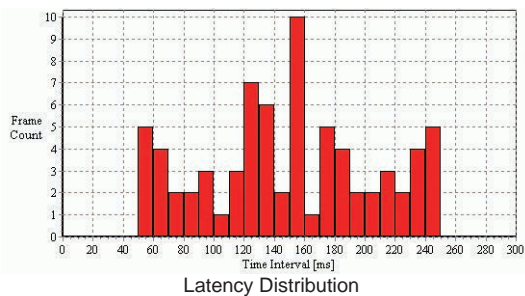

* When using test packets

IP Multicasts (Channel Zapping)

Surfing quickly through IPTV channels (called zapping) puts extremely high loads on the network and its routers. The multicast host emulation feature automatically increases and decreases the number of virtual hosts and channel zapping levels to verify and evaluate IP multicast QoS under high load conditions, which is difficult to achieve intentionally in a real network.

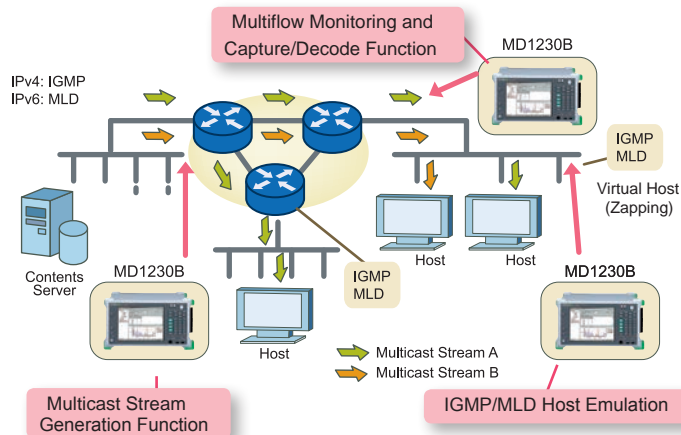

Multicast Host Emulation

<Multicast Host Emulation>


Multicast protocols that can be analyzed and emulated:

- IGMPv2/IGMPv3
- MLDv1/MLDv2 [Option 12]

Carrier Class Network Service Verification


Multiflow Counter QoS Priority Control Verification

Emulating high-load conditions and monitoring individual traffic flows under these conditions enables pre-commissioning QoS evaluation and verification.

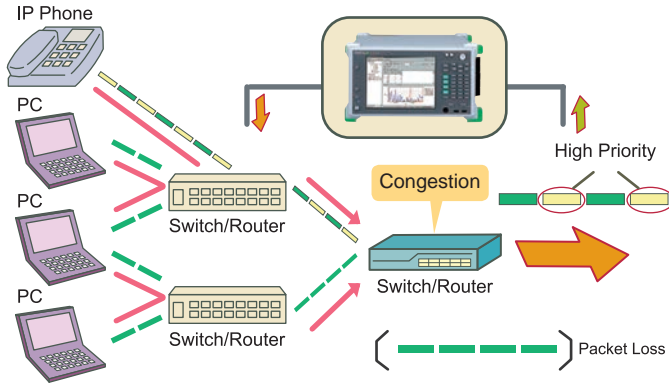

<Stream Generation>



Full-wire-rate, high-load traffic can be generated easily, something that is difficult to do intentionally on a real network. Using the stream editing functions supports flexible setting of QoS-related parameters.

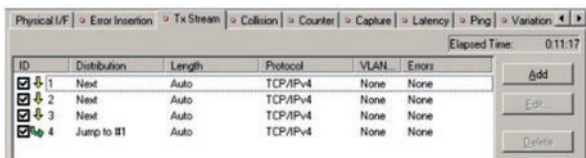

Stream Generation

<Multiflow Counter>

Simultaneous monitoring of every traffic condition (throughput/delay/frame loss) enables verification of QoS controls and measurement of QoS efficiency. Templates with various priority parameters, including MAC, VLAN, IP, and TCP/UDP port number, are provided.

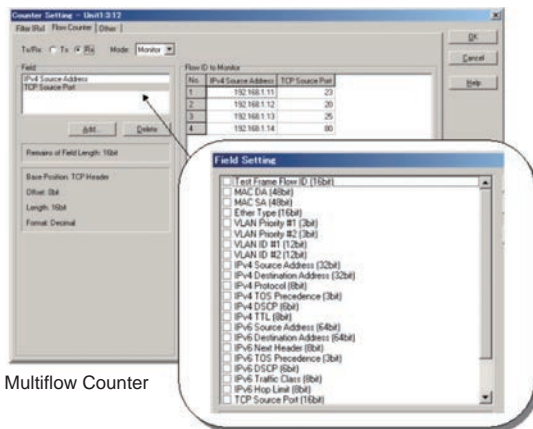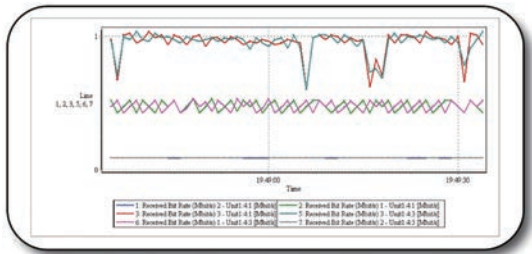


Multiflow Counter

Flow Definitions (Priority Parameters)

Ethernet OAM Function Verification

The Ethernet OAM Protocol Emulation Function [Option 28] imitates equipment supporting Ethernet OAM (MEP) for evaluation and verification of networks and network equipment.

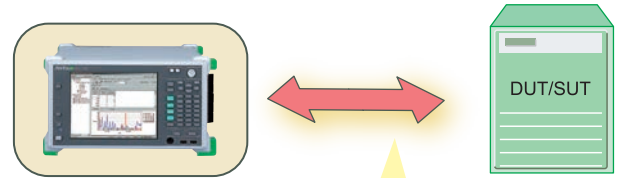

<Ethernet OAM Protocol Emulation>

Supports ITU-T Y.1731 and IEEE 802.1ag CCM periodic send*; LBM/LTM response*; RDI addition*; LOC/AIS/RDI detection*; and OAM frame send and protocol analysis of captured frame

*: Enabled with MU120131A 10/100/1000M Ethernet Module, MU120132A Gigabit Ethernet Module and MU120138A 10 Gigabit Ethernet Module

Protocol Analysis

In addition to the standard protocol decoding functions, installing the Ethereal®/Wireshark® supports more detailed analysis of captured data.


* Ethereal® is registered trademarks of Ethereal, Inc.
* Wireshark® is registered trademarks of Gerald Combs.



Useful Functions

PC Remote Control


Installing the MX123001A Control Software options in an external PC supports remote control of the MD1230B using an identical built-in GUI. Multiple users are supported, allowing up to 8 operators to share a single mainframe by sharing ports. Connecting up to eight MD1230B units in cascade provides expansion to 40 slots.

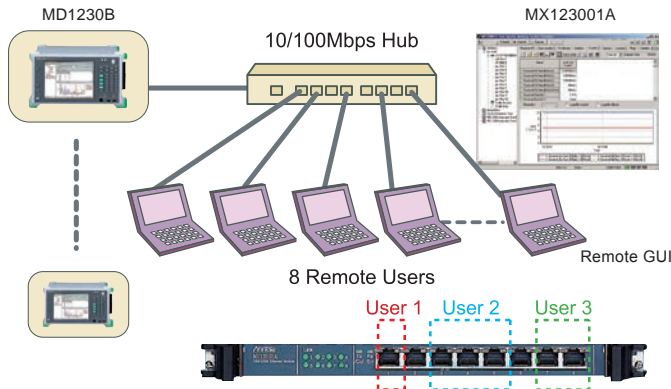

Cascade connection of up to 8 units

Report Function


Reports are output in HTML format. Counter, Multiflow Counter, Latency, RFC 2544, and RFC 2889 measurement results can be saved with attached graphs and measurement conditions. The Pause function can be used to save results to reports during measurement.

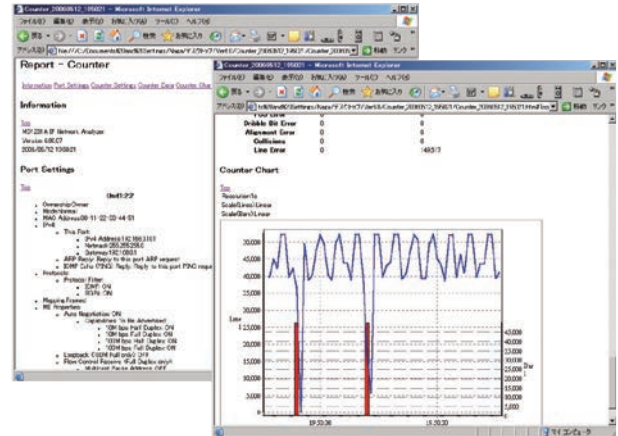


Remote Control Command Interfaces

Using the remote command interface allows automatic control of measuring instruments by sending text-based commands, making it easy to create applications for automatic testing. The RS-232C, GPIB, and Ethernet interfaces all support remote commands.

Single User

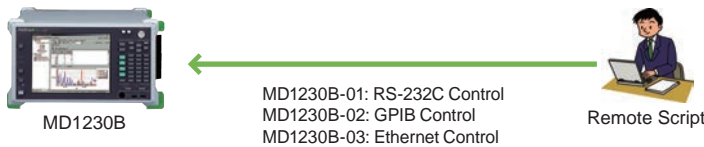

Multi User

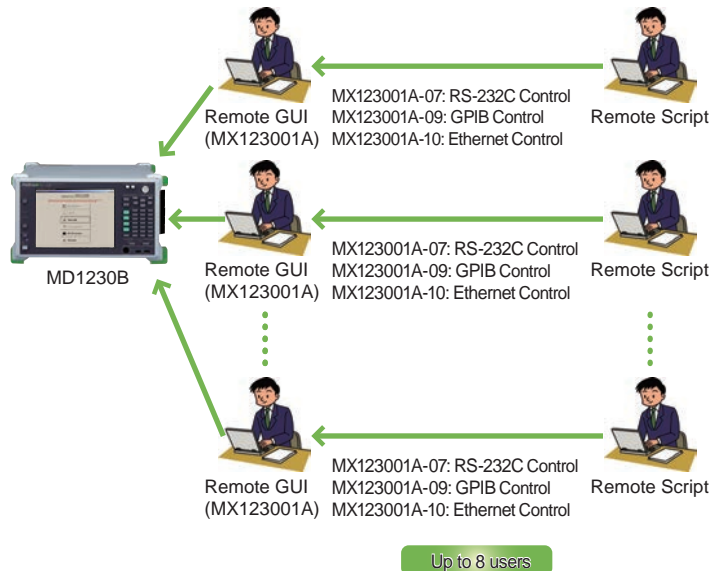



Functions

Model	MU120131A	MU120132A	MU120138A
Interface	10/100/1000BASE-T	1000BASE-X	10GBASE-R
Ports (Connector)	12 (RJ-45)	8 (SFP)	4 (SFP+)
Clock Variation	✓*1	✓*1	✓*1
Link Flap	✓	✓	✓*2
Auto MDI/MDI-X	✓		
Frame Generation			
Stream Generation (Tx Stream)	✓	✓	✓
Multi-Layer VLAN	✓	✓	✓
MAC Address Increment	✓	✓	✓
IP Address Increment	✓	✓	✓
TCP/UDP Port Number Increment	✓	✓	✓
Spanning Tree/Link Aggregation Frame (Option 23)	✓	✓	✓
Test Frame Addition	✓	✓	✓
Hardware Random Pattern	✓	✓	✓
Measurement			
Counter	✓	✓	✓
Multi-Flow Counter	✓	✓	✓
Capture	✓	✓	✓
Decode	✓	✓	✓
Latency	✓	✓	✓
Ping	✓	✓	✓
Ping6 (Option 12)	✓	✓	✓
Arrival Time Variation/Latency Variation	✓	✓	✓
Through Mode	✓	✓	✓
Monitor Mode	✓	✓	✓
Address Swap Mode	✓	✓	✓
Unframe BER Test	✓	✓	✓
Packet BER Test (Option 11)	✓	✓	✓
Auto Negotiation Analysis (Option 15)*3		✓	
Application Traffic Monitor (Option 20)	✓	✓	
Link Fault Signalling (Module Option 03)			✓*4
Clock Measurement	✓*1	✓*1	✓*1
PoE (Module Option 02)	✓		
Ethernet OAM (Option 28)	✓	✓	✓
Automatic Test			
RFC 2544 with VLAN	✓	✓	✓
RFC 2889 with VLAN (Option 10)	✓	✓	✓
Protocol Emulation			
ARP	✓	✓	✓
ICMP	✓	✓	✓
ICMPv6 (Option 12)	✓	✓	✓
IGMPv2/IGMPv3	✓	✓	✓
IGAP (Option 14)	✓	✓	✓
MLD/MLDv2 (Option 12)	✓	✓	✓
MLDA (Option 22)*5	✓	✓	✓

*1: Requires MU120131A/32A-01 Clock Measurement option

*2: Excludes No/Go Check

*3: Supports SX/LX/LE/LR for SFP


*4: Requires MU120138A-03 Link Fault Signalling option

*5: Requires IPv6 Expansion (Option 12)



Selection Guide

■ Module Slots

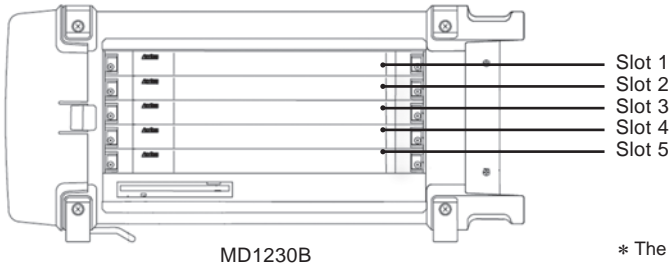

* The MD1230B is a 5-slot model accepting up to five measurement modules.

■ Installed Module Combinations

Model/Order No.	Name	No. of Slots Required	No. of Ports	Max. No. Modules	Supported Slots
MU120131A	10/100/1000M Ethernet Module	1	12	5	1 to 5
MU120132A	Gigabit Ethernet Module	1	8	5	1 to 5
MU120138A	10 Gigabit Ethernet Module	1	4	5	1 to 5

■ Mainframe Options

Model/Order No.	Name
MD1230B-01	RS-232C Control
MD1230B-02	GPIO Control
MD1230B-03	Ethernet Control
MD1230B-10	RFC 2889 Benchmarking Test
MD1230B-11	Packet BER Test
MD1230B-12	IPv6 Expansion
MD1230B-14	IGAP Protocol
MD1230B-15	Auto Negotiation Analysis
MD1230B-20	Application Traffic Monitor
MD1230B-22	MLDA Protocol*
MD1230B-23	Spanning Tree/Link Aggregation
MD1230B-28	Ethernet OAM

*: Requires Option 12 IPv6 Expansion



■ Module Options

Model/Order No.	Name
MU120131A-01, MU120132A-01, MU120138A-01	Clock Measurement
MU120131A-02	PoE
MU120138A-03	Link Fault Signalling



Specifications

MD1230B Data Quality Analyzer

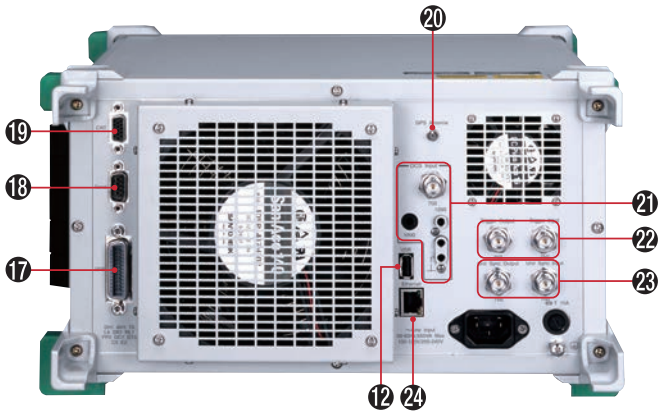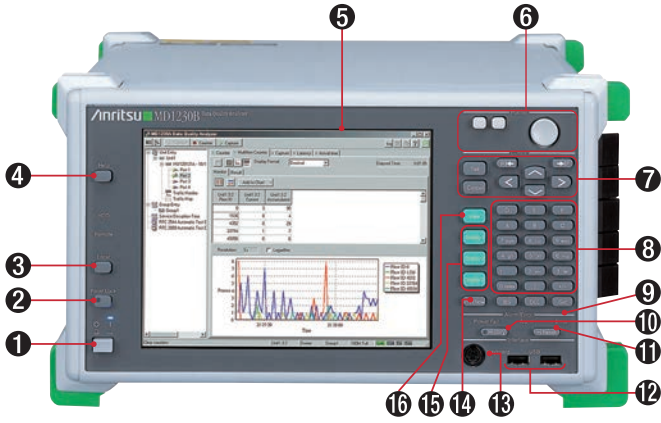

1	Power	Switches power on and off. LED lights at MD1230B power-on
2	Panel Lock	Disables input from keys and mouse
3	Local	Switches from remote control mode to local control mode
4	Help	Displays help information about current screen
5	LCD	8.4" TFT-LCD, SVGA (800 × 600)
6	Pointer	Enables operator to perform same operations as mouse
7	Cursor	Set: Sets data Cancel: Cancels data setting v ^ < > : Scrolls screen cursor R <-, -> F: Scrolls setting items
8	Input Keys	Input numeric values and characters
9	Error/Alarm	Displays receiver errors and alarms
10	History	At on, Error/Alarm LED [9] stays on after error or alarm displayed. At off, LED [9] flashes after error or alarm display
11	H.Reset	Resets history data
12	USB	Ports to connect USB devices (2 ports on front and 1 port on back)
13	Keyboard	Connects PS/2 keyboard
14	Print Now	Prints screen at external printer
15	Display1 to 3	Saves specified screen. Pressing one of these buttons for more than 2 seconds records tab positions on current screen. Pressing for less than 2 seconds displays stored tab positions
16	View*	Switches between tree view and graphical view
17	GPIB	GPIB interface connector
18	RS-232C	RS-232C interface connector
19	CRT	VGA connector to connect external display
20	GPS Antenna	Connects GPS antenna
21	DCS Input	Connector to input clock or data to synchronize SDH/SONET signals to external clock
22	Trigger	Input: Connector to input external trigger signals to perform APS test and frame capture Output: Connector to output trigger signals generated by frame capture
23	Unit Sync. Input/Output	Unit sync. input/output connector to synchronize time between MD1230B
24	Ethernet	Ethernet interface (10BASE-T/100BASE-TX) to connect external controller
25	Module Slots	For installing up to five interface modules
26	FDD	Floppy disk drive

*: This function is disabled in Ver 7.0 or later.

MD1230B Mainframe Specifications

Model		MD1230B Data Quality Analyzer
Indicator	LCD	8.4", Color TFT, SVGA (800 × 600)
	LED	Power, HDD, Remote, Panel Lock, Power Fail, Error, Alarm, History
OS		Windows® XP Professional
Storage Unit		HDD and 3.5" FDD
		RS-232C, GPIB, Ethernet (RJ-45), USB1.1 × 3 ports, Keyboard (PS/2), GPS antenna, CRT (15-pin mini D-sub)
Interface	Trigger	Trigger Input: For APS test and frame capture Trigger Output: Capture trigger Level: TTL (Active High) Connector: BNC (75 Ω)
		Unit Sync. Input/Output Level: TTL Connector: BNC (75 Ω)
	DCS Input	Frequency Clock: 1.544 MHz, 2.048 MHz, 64 kHz + 8 kHz Data: 1.544 Mbit/s, 2.048 Mbit/s Input Range: ±50 ppm Level/Code 1.544 M: ANSI T1.403 (B8ZS) 2.048 M: ITU-T G.703 Table 10 (HDB3) 64 kHz + 8 kHz: 0.63 to 1.1 V _{o-p} (AMI, 8 kHz violation) Connector 2.048 MHz, 2.048 Mbit/s: BNC (75 Ω) 2.048 MHz, 2.048 Mbit/s, 64 kHz + 8 kHz: Siemens (120 Ω balanced) 1.544 MHz, 1.544 Mbit/s: BANTAM (100 Ω balanced)
Remote Control		Remote control using LAN (10BASE-T/100BASE-TX) with MX123001A Remote command control with RS-232C (Option 01) or GPIB (Option 02) or LAN (10BASE-T/100BASE-Tx, Option 03)
Input Device		Pointing device, front keys
Power		100 to 120/200 to 240 Vac (autoswitching), 50 Hz to 60 Hz
Power Consumption		≤650 VA
Operational Temperature and Humidity		+5° to +40°C, +20 to +80%
Dimensions and Mass		320 (W) × 177 (H) × 350 (D) mm, ≤15 kg (excluding options and plug-in modules)
EMC		EN 61326-1, EN 61000-3-2
LVD		EN 61010-1
Laser Safety		Depends on installed module. Refer to the safety standards for each module.
Number of Slots		5

*: See the selection guide and ordering information for supported modules and options.

*: Windows® is a registered trademark of Microsoft Corporation in the USA and other countries.

• Express Flow Module Specifications

Model	MU120131A	MU120132A	MU120138A	
Name	10/100/1000M Ethernet Module	Gigabit Ethernet Module	10 Gigabit Ethernet Module	
Specification	10BASE-T, 100BASE-TX, 1000BASE-T	1000BASE-SX/LX/LE/LR (depends on SFP Module)	10GBASE-SR/LR/ER (depends on SFP+ Module)	
Connector	RJ-45 (Auto MDI/MDI-X)	SFP (LC)	SFP+ (LC)	
Number of Ports	12	8	4	
Bit Rate	10, 100, 1000 Mbit/s	1000 Mbit/s	10 Gbit/s	
Duplex Mode	Full/Half*1	Full		
Auto Negotiation	On/Off		—	
Flow Control	On/Off			
LED	Link			
Clock Variation (Module Option 01)	On/Off, Resolution 1 ppm, -100 to +100 ppm Clock Accuracy: MD1230B: ±4 ppm, MP1590B: ±0.1 ppm			
Clock Measurement (Module Option 01)	Without 10BASE-T, Accuracy: MD1230B: ±4 ppm, MP1590B: ±0.1 ppm			
Mode	Normal, Monitor, Through (port 1 and port 2, port 3 and port 4, port 5 and port 6, port 7 and port 8, port 9 and port 10, port 11 and port 12), Address Swap			
PoE (Module Option 02)	Class: Class 0 to 4, off Level: off (0 to 31.7 V)/ Under (31.7 to 43.3 V)/ Normal (43.3 V and over)		—	
Link Up/Down	On/Off/Flap (Interval On:10 to 3600 s, Off: 1 to 3600 s, Count: 1 to 65535, Infinite), No/Go Check: On/Off		On/Off/Flap (Interval On:10 to 3600 s, Off: 1 to 3600 s, Count: 1 to 65535, Infinite), No/Go Check: None	
Frame Generation (Tx Stream)				
Streams				
	256/Port			
Stream Setting	Stream Transport Mode: Continuous, Continuous Burst, Stop after this Stream, Next Stream, Jump to Stream, Jump to Stream for Count (Loop Count: 1 to 16,000,000), Jump to Stream for Count and Stop (Loop Count: 1 to 16,000,000)			
Frames per Burst	1 to 16,777,215		1 to 1,099,511,627,775	
Bursts per Stream	1 to 1,099,511,627,775			
Gap Setting	Inter Frame Gap	1000BASE-T: Resolution of 8 ns, 80 ns to 120 s settable as Fixed or Random 100BASE-TX: Resolution of 80 ns, 800 ns to 1200 s settable as Fixed or Random 10BASE-T: Resolution of 800 ns, 8 μs to 12000 s settable as Fixed or Random	1000BASE-T: Resolution of 8 ns, 64 ns to 120 s settable as Fixed or Random	Resolution of 0.8 ns, 7.2 ns to 120 s settable as Fixed or Random
	Inter Burst Gap	1000BASE-T: Resolution of 8 ns, 80 ns to 120 s settable as Fixed 100BASE-TX: Resolution of 80 ns, 800 ns to 1200 s settable as Fixed	1000BASE-T: Resolution of 8 ns, 64 ns to 120 s settable as Fixed	Resolution of 0.8 ns, 7.2 ns to 120 s settable as Fixed
	Inter Stream Gap	10BASE-T: Resolution of 800 ns, 8 μs to 12000 s settable as Fixed		Resolution of 0.8 ns, 9.6 ns to 120 s settable as Fixed
Frame Setting	Preamble Size: 4 bytes to 255 bytes		Preamble Size: 2 bytes to 255 bytes	
	<p>MAC Address: Fixed, Increment, Decrement, or Random (Changeable part specified in 4-bit units)</p> <p>VLAN tag*2: Up to 10 layer VLAN tags appended. VLAN ID settable to Increment, Decrement, or Random</p> <p>MPLS label*2: Up to 10 MPLS labels appended. Fixed setting</p> <p>Protocol Editing: None, ARP, IPv4, IGMP/IPv4, ICMP/IPv4, TCP/IPv4, UDP/IPv4, RIP/UDP/IPv4, DHCP/UDP/IPv4, IPv6, IPX, IS-IS, MAC Control Frame (Pause Frame)</p> <p>Support by IPv6 Expansion (Option 12): ICMPv6/IPv6, TCP/IPv6, UDP/IPv6, IPv6 over IPv4, ICMPv6/IPv6 over IPv4, TCP/IPv6 over IPv4, UDP/IPv6 over IPv4</p> <p>Supported by MLDA Protocol (Option 22): ICMPv6 MLDA Type Message</p> <p>Supported by Spanning Tree/Link Aggregation (Option 23): STP Configuration BPDU, STP TCN BPDU, RST BPDU, MST BPDU, LACPDU, Marker PDU, Marker Response PDU</p> <p>IPv4/IPv6: IP Destination/Source Address independently set to Fixed, Increment, Decrement, or Random</p> <p>TCP/UDP: Either Destination Port Number or Source Port Number set to Increment or Random</p> <p>Data Field: Set any parts of data field as All 0, All 1, Alternate1/0 (Each Bit, Each 2 Bits, Each 4 Bits, Each 1 byte, Each 2 bytes), Increment, Decrement, or Random</p> <p>Only Data Field 1 settable to Programmable, Single PRBS9, Time Stamp*3, Sequence Number*3,*9, Hardware Random Pattern*3.</p> <p>Test Frame. settable Flow ID number when Test Frame used</p> <p>Programmable Header Pattern: One user-defined pattern settable</p> <p>Supported by Ethernet OAM (Option 28) : CCM, LBR, LBM, LTR, LTM, AIS, LCK, TST, APS, MCC, LMR, LMM, 1DM, DMR, DMM, EXR, EXM, VSR, VSM</p> <p>Each captured frame can be sent as Tx Stream.</p>			
Frame Size	48 bytes to 10,000 bytes, settable as Auto, Fixed, Increment*4, or Random*4			

Model		MU120131A	MU120132A	MU120138A
Error Insertion	Ethernet	FCS Error, Undersize, Oversize, Fragment, Oversize & FCS Error		
		Dribble Bit Error, Alignment Error, Collision	Line Error (8B/10B Code Error, Running Disparity Error)	Line Error (XGMII)
	IP	IPv4 Header Checksum Error		
	TCP/UDP	TCP/UDP Checksum Error		
	Data (Option 11)	PRBS Error: Single PRBS9, PRBS23 (Cross), PRBS31 (Cross)		
Unframe BER Setting	Test Pattern: All 0, All 1, User 16, PRBS23, PRBS31		Test Pattern: All 0, All 1, User 16, PRBS23, PRBS31, CJPAT, CRPAT	
	Error Insertion: Bit All			
	Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 9.9E-3)		Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 2.0E-3)	
Cross PRBS Error Setting	Test Pattern: Single, PRBS23, PRBS31			
	Error Insertion: Cross PRBS Error			
	Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 9.9E-3)		Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 2.0E-3)	
Fragment Tool		Stream ID: 1 to 255, All, MTU: 1 byte to 9936 bytes Number of datagrams: 1 to 127 Initial Identification: 0x0000 to 0xffff (IPv4), 0x00000000 to 0xffffffff (IPv6), Increment Identification: On/Off		
Measurement Function				
Counter	Ethernet	Transmitted/Received Frame Count, Transmitted/Received Frame Rate, Transmitted/Received Bit Rate, Transmitted/Received Byte Count, Transmitted/Received Rate, FCS Error, Undersize, Fragment, Oversize, Oversize & FCS Error, Line Error, MAC Control Frame, Transmitted/Received ARP Request, Transmitted/Received ARP Reply, Frequency, Frequency Difference, Link Failed		
		Dribble Bit Error, Alignment Error, Collision, PoE Alarm (Module Option 02)	Byte Alignment Error, Preamble CRC Error	—
	Ethernet OAM (Option 28)	LOC, AIS, RDI (shared resolution: 0.1 ms)		
	IPv4	Transmitted/Received IPv4 Packet Count, Transmitted/Received IPv4 Packet Rate, Transmitted/Received Ping Request, Transmitted/Received Ping Reply, IP Header Checksum Error		
	IPv6 (Option 12)	Transmitted/Received IPv6 Packet Count, Transmitted/Received IPv6 Packet Rate, Transmitted/Received ICMPv6 (NS) Count, Transmitted/Received ICMPv6 (NA) Count, Transmitted/Received ICMPv6 (Echo Request) Count, Transmitted/Received ICMPv6 (Echo Reply) Count		
	TCP/UDP	Received TCP Packet Count, Received TCP Packet Rate, Received UDP Packet Count, Received UDP Packet Rate, TCP Checksum Error*5, UDP Checksum Error*5		
	Data	Capture Trigger, Capture Filter, User-Defined 1 Count/Rate, User-Defined 2 Count/Rate, QoS 0 to 7 Frame Count/Rate QoS Counter Setting: QoS target is IPv4 (ToS) or VLAN tag (Priority) .		
	Packet BER Test (Option 11)	Transmitted/Received Test Frame Count, Sequence Error, Received PRBS Error Frame Count/Rate, Received PRBS Error Bit Count/Rate		
	Unframed BER Test	Bit Error Count/Rate, Pattern Sync. Loss Count/Second		
	LFS (Module Option 03)	—	Transmitted/Received RF Signal Transmitted/Received LF Signal	
Multi-flow Counter	(All Ports) settable as up to 16 bits 4 filters to count each value at a special bit in frames. (Max 255 values) 255 flow/unit counters are supported for real time count. Flow count item: Transmitted/Received Frame Count, Transmitted/Received Frame Rate, Transmitted/Received Bit Rate, Transmitted/Received Byte Count, Transmitted/Received Rate, Latency, Sequence Error			
Latency	Displayed when Test Frames received. Result includes 1s sampling value, max, min, avg. and number of samples			
Frame Arrival Time/Latency Distribution	32 counters display result. Resolution: Frame Arrival Time: 1 µs, 10 µs, 100 µs, 1 ms, 10 ms, 100 ms, 1 s Latency Distribution: 50 ns, 100 ns, 1 µs, 10 µs, 100 µs, 1 ms, 10 ms, 100 ms			
Custom Counter	Frame Loss, Frame Loss Rate, Received bit Rate, Received Average Frame Size (byte), Service Disruption Time			
Capture	Capture Buffer*6	16 Mbytes/port		256 Mbytes/port
	Preamble Capture	On/Off		
	Capture Filter/Trigger*6	At following conditions for each port, Capture Filter/Trigger condition settings: Condition: 128-bit pattern 1 to 4, Error Only capture trigger set to following: Traffic Over, Latency Over, External Trigger, Manual Trigger		
	Decode Protocol	Ethernet (Type II, IEEE802.3, Mac Control), VLAN, MPLS, LLC, LACP, BPDU (STP, RST, MST), ARP, Ethernet OAM, IP, IPv6 (include Extended Header), IPX, OSINL, IS-IS, IGMP (include IGAP), ICMP, ICMPv6 (include NDP, MLD, MLDA) TCP, UDP, OSPF, OSPFv3, DVMRP, LDP (CR-LDP), BGP4, RIP, DHCP, RSVP (RSVP-TE), BGP4+, PIM-SmV2, PPP (include LCP, IPCP, IPV6CP, OSINLCP, MPLSCP), CiscoHDLC, MAPOS, NSP, SSP, Test Frame, Preamble (include E-PON frame), OAM (IEEE802.3), MPCP, EoPMLS		
	Extended Decode Protocol	MD1230B includes Ethereal®/Wireshark® Convert Function		
Protocol Emulation	Ethernet OAM (Option 28)*7, ARP, ICMP, ICMPv6 (Option 12), IGMPv2, IGMPv3, IGAP (Option 14), MLD (Option 12), MLDv2 (Option 12), MLDA (Option 22)*8			

Model	MU120131A	MU120132A	MU120138A
Auto Negotiation Analysis (Option 15)	—	10B Code Data Transmitted, Auto Negotiation Sequence Capture, Link Timer Value Variable functions	—
Link Fault Signalling (Module Option 03)	—		LF, RF, User-Defined Signal Tx XGMII Signal Capture
Application Traffic Monitor (Option 20)	Support 1 ms traffic monitoring at 4 ports (4 flows max.)		—
RFC 2544 Automatic Test	Following 6 types of tests supported with one layer VLAN tags. (MD1230B supports continuous tests [1] to [5]) [1] Throughput [2] Latency [3] Frame loss rate [4] Back-to-back frames [5] System recovery [6] Reset		
RFC 2889 Automatic Test (Option 10)	Following 10 types of tests supported with one layer VLAN tags: [1] Fully meshed throughput, frame loss, and forwarding rate [2] Partially meshed one-to-many/many-to-one [3] Partially meshed multiple devices [4] Partially meshed unidirectional traffic [5] Congestion control [6] Forward pressure and maximum forwarding rate [7] Address caching capacity [8] Address learning rate [9] Error-frame filtering [10] Broadcast frame forwarding and latency		
Laser Safety	—	IEC 60825-1: 2007: CLASS 1 21CFR1040.10*11	IEC 60825-1: 2007: CLASS 1M (SFP+ 10GBASE-SR)*10 IEC 60825-1: 2007: CLASS 1 (SFP+ 10GBASE-LR/ER) 21CFR1040.10*11

- *1: Supports link test only in 1000BASE-T half-duplex mode
- *2: VLAN tag and MPLS labels cannot both be used simultaneously.
- *3: When a sequence number or time stamp or hardware random pattern is used, the checksum field of the TCP/UDP packet contains an error code.
- *4: Increment and Random settings can be specified for the frame size only when none is selected as the protocol.
- *5: Packet fragments in the IP layer are not counted as error packets.
- *6: Sometimes, when using the capture filter, captured data may be smaller than the memory buffer, depending on the frame size.
- *7: Possible at port setting screen
- *8: Requires IPv6 Expansion (Option 12)
- *9: Sequence number is continuous in each Flow ID.
- *10: Warning: It may be dangerous to look directly into the laser light when monitoring laser output using optical equipment from a distance of less than 100 mm.
- *11: Excludes deviations caused by conformance to Laser Notice No. 50 dated June 24, 2007.

Safety measures for laser products

This product complies with optical safety standards in 21CFR1040.10 and IEC 60825-1; the following descriptive labels are affixed to the product.



MU120131A 10/100/1000BASE-T 12 Ports



MU120132A 1000BASE-X(SFP) 8 Ports



MU120138A 10GBASE-R (SFP+) 4 Ports



Ordering Information

Please specify the model/order number, name and quantity when ordering.
The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name
Main Frame	
MD1230B	Data Quality Analyzer
Standard Accessories	
	Power Cord*1: 1 pc
F0113	Fuse, 15 A*1: 1 pc
B0329G	Front Cover (for 3/4MW4U)*1: 1 pc
B0500A	Side Cover*1: 1 pc
Z0847A	MD1230/MP1590 Family Software CD*1, *2: 1 pc
Plug-in Modules	
MU120131A	10/100/1000M Ethernet Module
MU120132A	Gigabit Ethernet Module*3
MU120138A	10 Gigabit Ethernet Module*4
Options	
MD1230B-01	RS-232C Control
MD1230B-02	GPIO Control
MD1230B-03	Ethernet Control
MD1230B-10	RFC 2889 Benchmarking Test
MD1230B-11	Packet BER Test
MD1230B-12	IPv6 Expansion
MD1230B-14	IGAP Protocol
MD1230B-15	Auto Negotiation Analysis
MD1230B-20	Application Traffic Monitor
MD1230B-22	MLDA Protocol*5
MD1230B-23	Spanning Tree/Link Aggregation
MD1230B-28	Ethernet OAM
MU120131A-01	Clock Measurement
MU120131A-02	PoE
MU120132A-01	Clock Measurement
MU120138A-01	Clock Measurement
MU120138A-03	Link Fault Signalling
Software	
MX123001A	Data Quality Analyzer Control Software*6, *7
MX123001A-05	Data Quality Analyzer Control Software (5 licenses)*6, *7
MX123001A-08	Data Quality Analyzer Control Software (8 licenses)*6, *7
Software Options	
MX123001A-07	RS-232C Control*8
MX123001A-09	GPIO Control*8
MX123001A-10	Ethernet Control*7

- *1: Supplied with main frame
- *2: CD includes installer, release notes and operation manual and cannot be purchased separately.
- *3: Requires SFP modules (sold separately).
In addition, operation with non-Anritsu modules not guaranteed.
- *4: Requires SFP+ module (sold separately).
In addition, operation with non-Anritsu modules not guaranteed
- *5: Requires separate MD1230B-12
- *6: MD1230B-03 not required
- *7: Windows 2000, XP, 7 are supported.
- *8: Windows 2000, XP are supported.
- *9: SFP modules sold as single units.
Eight can be mounted in MU120132A.
- *10: SFP+ modules sold as single units. Four can be mounted in MU120138A.
- *11: Required for synchronizing time between several units. MD1230B use BNC connectors; J0775B/D is required for connecting BNC connectors.

Model/Order No.	Name
Optional Accessories	
G0181A	SFP SX 850 nm*9
G0182A	SFP LX 1310 nm*9
G0183A	SFP LE 1310 nm*9
G0184A	SFP LR 1550 nm*9
G0238A	SFP+ SR 850 nm*10
G0239A	SFP+ LR 1310 nm*10
G0271A	SFP+ ER 1550 nm*10
J1049A	Fixed Optical Attenuator (SC, 5 dB)
J1049B	Fixed Optical Attenuator (SC, 10 dB)
J1049C	Fixed Optical Attenuator (SC, 15 dB)
J1271	Optical Fiber Cord (Duplex, SM, LC-LC connector), 2 m
J1272	Optical Fiber Cord (Duplex, SM, LC-SC connector), 2 m
J1273	Optical Fiber Cord (Duplex, GI, LC-LC connector), 2 m
J1274	Optical Fiber Cord (Duplex, GI, LC-SC connector), 2 m
J0775B	Coaxial Cable (BNC-P620 • 3C-2WS • BNC-P620, 75 Ω), 0.5 m*11
J0775D	Coaxial Cable (BNC-P620 • 3C-2WS • BNC-P620, 75 Ω), 2 m*11
J0008	GPIO Cable, 2 m
J1109B	LAN Cable (CAT5, cross), 5 m
J1110B	LAN Cable (CAT5, straight), 5 m
J1275	LAN Cable (CAT5E, straight), 1 m
J1275B	LAN Cable (CAT5E, straight), 5 m
J1275C	LAN Cable (CAT5E, cross), 1 m
J1275D	LAN Cable (CAT5E, cross), 5 m
Z0321A	Keyboard (PS/2)
Z0541A	USB Mouse
B0336C	Carrying Case (3/4MW4U, 350D)
B0530	Carrying Case caster for B0336C
B0533	Carrying Case
B0448	Soft Case
B0593A	Blank Panel
Z0849A	MD1230 /MP1590 Family Manual CD
W1927AE	MD1230A/B Operation Manual
W1928AE	MX123001A Control Software Operation Manual
W1929AE	MD1230A Remote Control Operation Manual
W2134AE	Application Traffic Monitor Operation Manual
W1931AE	Ethernet Module Operation Manual

• Maintenance Service

Model/Order No	Name
Maintenance Service	
***-ES210	2 Years Extended Warranty Service
***-ES310	3 Years Extended Warranty Service
***-ES510	5 Years Extended Warranty Service

- *: Extends standard 1-year warranty at purchase to 2, 3, or 5 years.
Must be purchased separately when purchasing new Anritsu product.
(Cannot be purchased midway through standard 1-year warranty, at standard warranty expiry, or as combination of several multi-year contracts.)
- ***-ES210: MD1230B-ES210, MU120131A-ES210, MU120132A-ES210, MU120138A-ES210
- ***-ES310: MD1230B-ES310, MU120131A-ES310, MU120132A-ES310, MU120138A-ES310
- ***-ES510: MD1230B-ES510, MU120131A-ES510, MU120132A-ES510, MU120138A-ES510



B0336C Carrying Case



B0533 Carrying Case



B0448 Soft Case

Note:

● **United States**

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

● **Canada**

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

● **Brazil**

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

● **Mexico**

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

● **United Kingdom**

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

● **France**

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

● **Germany**

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

● **Italy**

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

● **Sweden**

Anritsu AB

Kistagången 20B, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

● **Finland**

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

● **Denmark**

Anritsu A/S

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

● **Russia**

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

● **Spain**

Anritsu EMEA Ltd.

Representation Office in Spain

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 8
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

● **United Arab Emirates**

Anritsu EMEA Ltd.

Dubai Liaison Office

902, Aurora Tower,
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

● **India**

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

● **Singapore**

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

● **P.R. China (Shanghai)**

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

● **P.R. China (Hong Kong)**

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

● **Japan**

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8359

● **Korea**

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

● **Australia**

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

● **Taiwan**

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

Please Contact: