

# MT8815B

Radio Communication Analyzer  
30 MHz to 2.7 GHz





# All in 1 Unit for Basic Tx and Rx Measurements of W-CDMA/HSPA/HSPA Evolution, GSM/GPRS/EGPRS, CDMA2000 1X/1xEV-DO Rev. A, PHS/Advanced PHS, and TD-SCDMA/HSPA Systems

## Supports Multi-Communication Systems

The MT8815B Radio Communication Analyzer platform covers a frequency range of 30 MHz to 2.7 GHz. When the dedicated optional measurement software and hardware is installed, the major Tx and Rx characteristics of W-CDMA/HSPA/HSPA Evolution, GSM/GPRS/EGPRS, CDMA2000 1X, CDMA2000 1xEV-DO Rev. A, PHS/Advanced PHS, and TD-SCDMA/HSPA terminals can be measured using a single MT8815B unit.

## Advanced Digital Signal Processing and Batch Measurement

Manufacturing and inspection test times have been dramatically cut by incorporating advanced DSP and parallel-measurement technologies. Furthermore, several measurement items can be selected freely for batch measurement, and the number of measurements for each measurement item can be configured separately. The one-touch operation supports easy and quick measurement of Tx and Rx characteristics, including transmit frequency, modulation accuracy, transmit power, spectrum emission mask, adjacent channel leakage power ratio, occupied bandwidth, and BER.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

## High-accuracy Tests at Repair and Maintenance

The MT8815B is a compact high-accuracy, high-speed tester for single RF measurements made at manufacturing, repair, and maintenance of mobile terminals. It is the ideal solution for service points (sales offices) and repair centers when used in combination with the MT8510B Service Tester.

## Manufacturer Test Suite

Manufacturer Test Suite is the ideal solution for making RF adjustments and RF parametric tests on mobile terminal production lines. The basic version consists of signal generator and signal analyzer functions without call processing, supporting RF adjustments and RF parametric tests in the test mode (mobile controlled by external PC). Installing the call processing software option supports RF parametric tests while controlling the mobile terminal at call processing. Adding the adjustment software option shortens the time required for RF adjustment by using the chipset adjustment function.

# MT8815B

Radio Communication Analyzer  
30 MHz to 2.7 GHz



# Supports Multi-Communication Systems

All-in-one Support for Basic Tx and Rx Measurements of W-CDMA/HSPA/HSPA Evolution, GSM/GPRS/EGPRS, CDMA2000 1X/1xEV-DO Rev. A, PHS/Advanced PHS, and TD-SCDMA/HSPA Systems

## W-CDMA Measurement

3GPP-compliant measurements of Tx and Rx characteristics of 3G W-CDMA terminals.

### Transmitter Measurement

The transmit power, frequency error, occupied bandwidth, spectrum emission mask, adjacent channel leakage power ratio, modulation accuracy, and peak code domain error can be measured.




Transmitter Measurement

## HSDPA Measurement

3GPP-compliant measurements of Tx and Rx characteristics of 3.5G HSDPA terminals.

### Transmitter Measurement


The transmit power, spectrum emission mask and adjacent channel leakage power ratio of the HS-DPCCH transmission slot are measured. At measurement in the time domain, the power step at the HS-DPCCH slot boundary, modulation, and code domain power are measured.

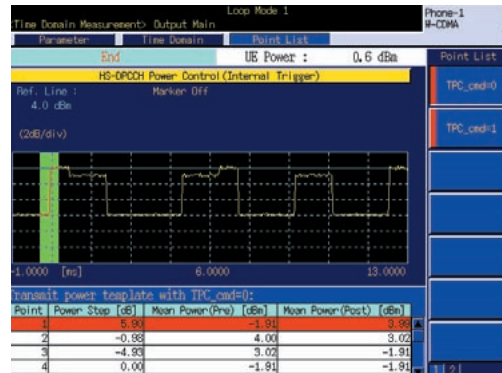

HS-DPCCH Measurement

## Receiver Measurement


The bit error rate can be measured using the 3GPP-specified loopback test mode. In addition, feeding the demodulated data and clock signals from the W-CDMA terminal directly to the MT8815B supports bit error rate measurement. Both PN9 and PN15 can be set as the downlink RF signal data pattern.

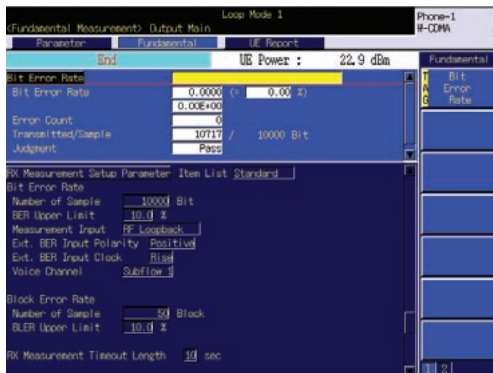

BER

## Receiver Measurement

The HSDPA throughput can be measured by counting the number of ACK blocks from the HSDPA terminal.

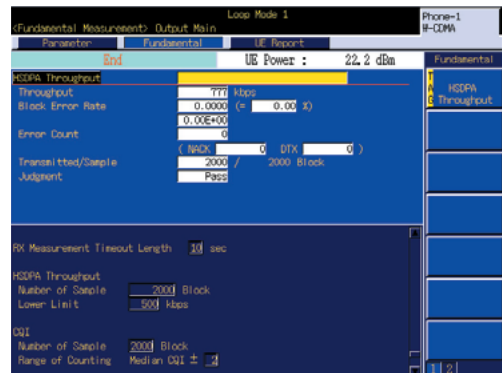

Throughput

\* Requires MT8815B-001, MX882000C, and MX88205xC

\* Requires MT8815B-001, MX882000C, MX882000C-011, and MX882050C

Refer to the MX882000C catalog for details.



## HSUPA Measurement

3GPP-compliant measurements of Tx and Rx characteristics of 3.5G HSUPA terminals.

### Transmitter Measurement


The transmit power, spectrum emission mask, and adjacent channel leakage power ratio at HS-DPCCH and E-DCH transmission are measured.



Transmitter Measurement

### Throughput Monitor

The E-DCH throughput is calculated from the E-TFCI notification from the HSUPA terminals. In addition, the E-TFCI statistics (average, median, maximum and minimum) are displayed.

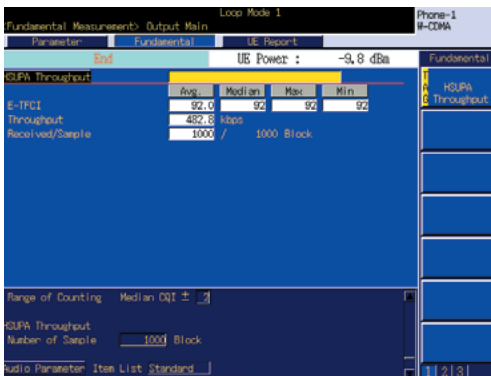

Throughput Monitor


\* Requires MT8815B-001, MX882000C, MX882000C-011, MX882000C-021, and MX882050C

## HSPA Evolution Measurement

3GPP-compliant measurements of Tx and Rx characteristics, throughput and CQI of enhanced 3.5G HSPA Evolution terminals. FRC H-Set 8 (64QAM) and HS-DSCH Category 14 (21 Mbps class) test signals can be transmitted for HSPA Evolution throughput measurements.

### Transmitter Measurement


At measurement in the time domain, mobile terminal relative code domain power accuracy for HS-DPCCH and E-DCH with 16QAM are measured.

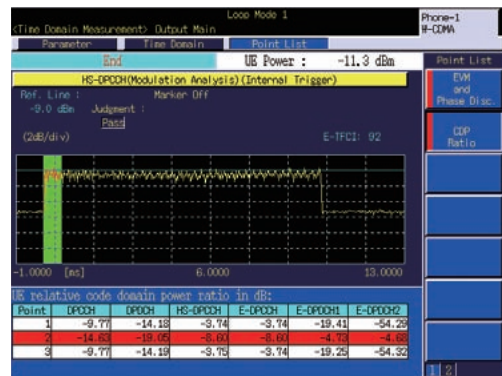

Code Domain Power

### Receiver Measurement

The HSDPA throughput with 64QAM can be measured by counting the number of ACK blocks from the terminal.

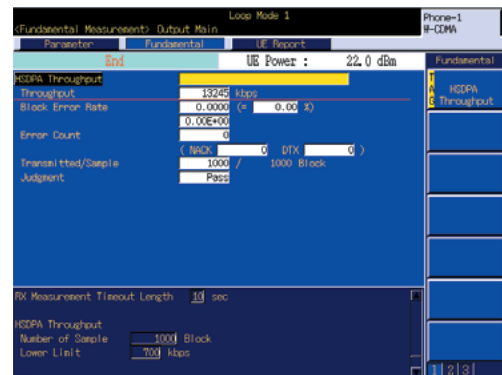

Throughput

\* Requires MT8815B-001, MX882000C, MX882000C-011, MX882000C-021, MX882000C-031, and MX882050C  
\* For terminal connectivity, contact your Anritsu sales representative.

Refer to the MX882000C catalog for details.



## GSM/GPRS Measurement

Measures Tx and Rx characteristics of GSM/GPRS terminals — world's most common digital mobile standard.

### Transmitter Measurement

At GSM/GPRS measurement, the transmit frequency, phase error (RMS and peak), transmit power, power versus time (template mask), and output RF spectrum can be measured.




Power vs. Time (GSM)

## EGPRS Measurement

Measures Tx and Rx characteristics of enhanced GPRS system (EGPRS) terminals.

### Transmitter Measurement

At EGPRS measurement, the transmit frequency, EVM (RMS and peak), origin offset, transmit power, power versus time (template mask), and output RF spectrum can be measured.

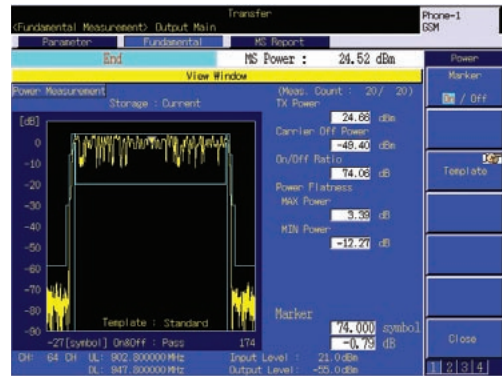


Burst Waveform Display (8PSK)

### Receiver Measurement

The uplink RF signal, which is looped back from GSM terminal, is demodulated by controlling the GSM terminal in the loopback condition to measure the frame error, bit error, and CRC error rates. And FAST BER measurement is supported.

The block error rate can be measured with the BLER and Test Mode B connection by controlling the GPRS terminal in the loopback condition.

The above receiver measurements can be performed in parallel with transmitter measurements.

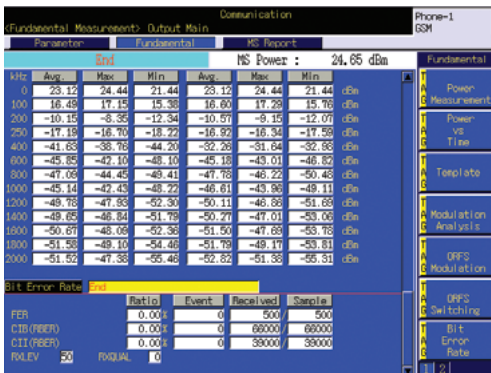


BER (GSM)

\* Requires MT8815B-002 and MX882001C

### Receiver Measurement

The uplink RF signal, which is looped back from EGPRS terminal, is demodulated by controlling the EGPRS terminal in the loopback condition to measure the block error or bit error.

The above receiver measurements can be performed in parallel with transmitter measurements.

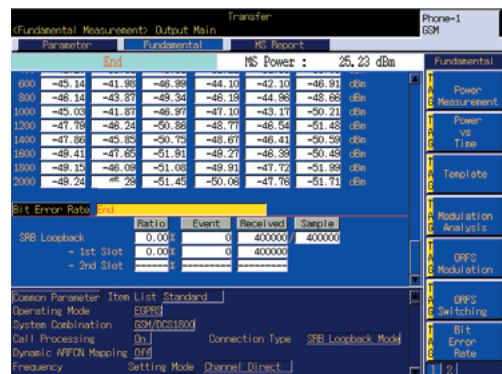

BER (SRB Loopback)

\* Requires MT8815B-002, MX882001C, and MX882001C-011

Refer to the MX882001C catalog for details.

## CDMA2000 1X Measurement

3GPP2-compliant measurements of Tx and Rx characteristics of 3G CDMA2000 1X terminals.

### Transmitter Measurement


The transmit power, modulation analysis, occupied bandwidth, code domain power, spurious emission, and access probe power can be measured.



Modulation Analysis

### Receiver Measurement

The Frame Error Rate (FER) and Pass/Fail evaluation can be performed in SO2, SO9, SO55 and SO32 (TDSO) to display the FER, error frame count, Tx frame count, confidence level, and Pass/Fail results.

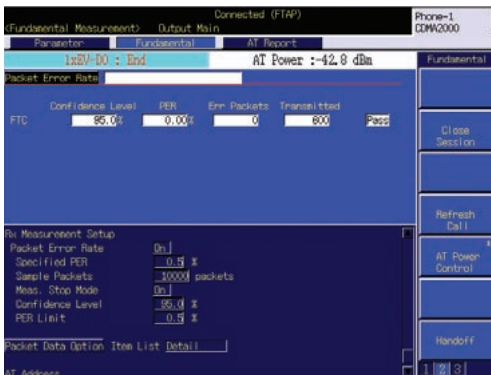

FER

\* Requires MT8815B-003 and MX882002C

## CDMA2000 1xEV-DO Rev. 0/Rev. A Measurement

3GPP2-compliant measurements of Tx and Rx characteristics of 3.5G 1xEV-DO Rev. 0/Rev. A terminals.

### Measurement Software and Protocol Revision

Model	Protocol Revision
MX882006C	IS-856-0 (1xEV-DO Rev. 0)
MX882006C-002	IS-856-0 (1xEV-DO Rev. 0)
MX882006C-011	IS-856-A (1xEV-DO Rev. A)

### Transmitter Measurement


The transmit power, modulation analysis, occupied bandwidth, code domain power, spurious emission, and access probe power can be measured.



Code Domain Power

### Receiver Measurement

PER (Packet Error Rate) measurement and Pass/Fail evaluation can be performed in FTAP to display the PER, error packet count, confidence level, and Pass/Fail results.

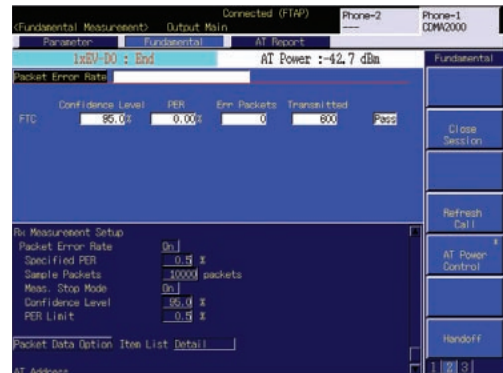

PER

\* Requires MT8815B-003, MT8815B-005, MX882002C, and MX882006C

\* Installing the MT8815B-003, MT8815B-005, MX882002C, MX882006C, and MX882006C-011 can measure of Tx and Rx characteristics of 1xEV-DO Rev. A terminal.

Refer to the MX882002C/MX882006C catalog for details.






## TD-SCDMA Measurement

3GPP-compliant measurements of the main Tx and Rx characteristics of 3G TD-SCDMA (1.28 Mcps TDD) and 3.5G HSDPA/HSUPA mobile terminals is supported.

### Transmitter and Receiver Measurement

3GPP-compliant measurement of TD-SCDMA with call-processing functions, including Tx/Rx items such as transmit power, power template, frequency error, occupied bandwidth, spectrum emission mask, adjacent channel leakage power, modulation accuracy, peak code domain error, open loop power control, closed loop power control, out-of-sync handling, BER, and BLER, is supported. In addition, one-touch setting of main Tx/Rx test items and closed loop power control offer easy configuration of automated 3GPP-compliant test systems.

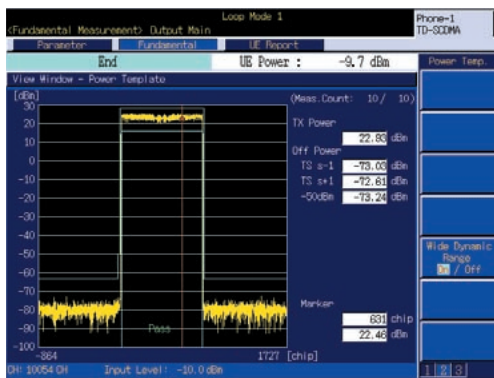

Power Template

### TD-SCDMA HSDPA Measurement

3GPP-compliant Throughput, and CQI measurements of TD-SCDMA HSDPA terminals are supported. The signals for Throughput measurement include RMC signals for all TD-SCDMA HS-DSCH categories as well as maximum category-15 data rates (2.8 Mbps).

### TD-SCDMA HSUPA Measurement

3GPP-compliant Tx measurement and Performance test of TD-SCDMA HSUPA with call-processing are measured. The signals for Tx measurement include HSUPA RMC category 1 to 6 (2.23 Mbps UE class) terminals can be transmitted. And, HSUPA performance measurement is calculated the information about bit rate by detecting E-DCH TB(Transport Block size) Index include E-UCCH sent from the mobile terminal to MT8815B/MT8820B.

- \* Requires MT8815B-001, MT8815B-007, and MX882007C for TD-SCDMA measurements.
- Requires MT8815B-001, MT8815B-007, MX882007C, and MX882007C-011 for TD-SCDMA HSDPA measurements.
- Requires MT8815B-001, MT8815B-007, MX882007C, MX882007C-011, and MX882007C-021 for TD-SCDMA HSUPA measurements.

\* For terminal connectivity, contact your Anritsu sales representative.


Refer to the MX882007C catalog for details.

## PHS/Advanced PHS Measurement

Measures Tx and Rx characteristics of PHS terminals/Advanced PHS terminals and base stations in compliance with ARIB RCR-STD-28 edition 5.0 supporting  $\pi/4$ DQPSK, 8PSK, and 16QAM modulation methods.

### Transmitter Measurement


The transmit frequency, modulation accuracy, transmit power, transmission rate, occupied bandwidth, adjacent channel power of PHS terminals/Advanced PHS terminals and base stations are measured simultaneously.

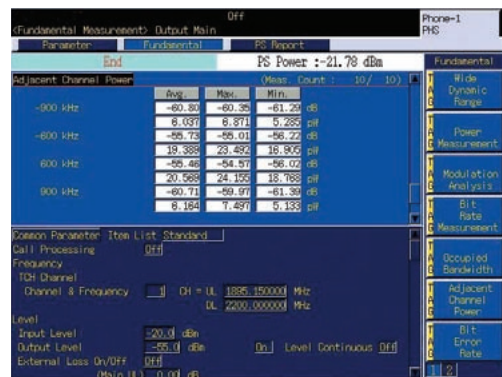

Adjacent Channel Power

### Receiver Measurement

The bit error rate can be measured on receipt of demodulation data and clocks output from a terminal/base station by controlling the terminal/base station with an external PC. This measurement can be performed in parallel with transmitter measurements.

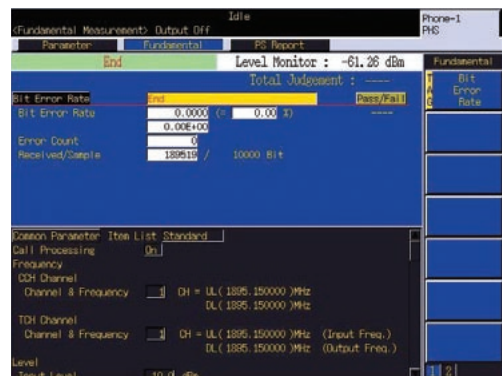

BER (8PSK)

- \* Requires MT8815B-002, and MX882005C for PHS measurements.
- Requires MT8815B-002, MX882005C, and MX882005C-011 for Advanced PHS measurements.

Refer to the MX882005C catalog for details.


# Supports All Function Tests

## Real-time Voice Encoding and Decoding

Voice tests with a handset are supported by the real-time voice encoding and decoding function of the W-CDMA (GSM, CDMA2000 1X, TD-SCDMA) Measurement Software. In addition, the call Tx and Rx audio can be measured using the audio measurement function.


## End-to-End Communications Test

This supports the end-to-end communications test between an Anritsu handset (A0013/A0058A) connected to the RJ11 connector on the MT8815B and a mobile terminal.

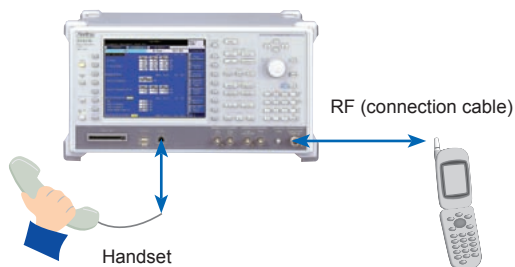

## Audio Transmitter and Receiver Measurement

The tone signal from the MT8815B AF Output connector is supplied to the microphone of the mobile terminal and the audio transmitter characteristics of the mobile terminal can be measured using the MT8815B to demodulate the uplink RF signal and measure the level, frequency, and distortion of the demodulated tone signal.

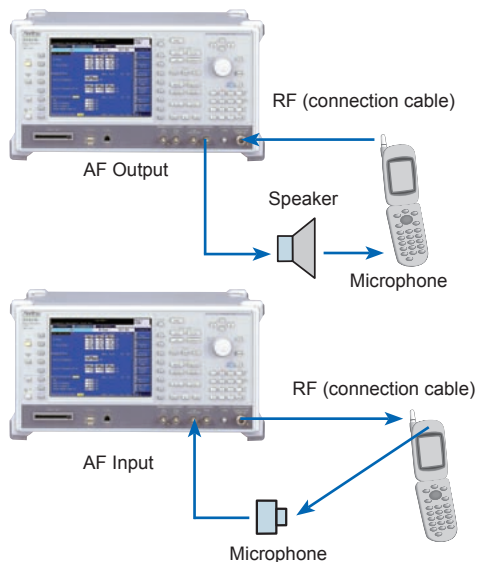


- \* Requires MT8815B-011, MX882000C-001, MX882001C-001, MX882002C-001 or MX882007C-001
- \* Audio Transmitter and Receiver Measurement supports W-CDMA, GSM, TD-SCDMA  
Audio Transmitter and Receiver Measurement does not support CDMA2000 1X

## Packet Communication Data Transfer Test

### End-to-End Data Transfer Test

Using the External Packet Data Software option supports end-to-end data transfer between a mobile terminal (W-CDMA, HSDPA, GPRS, CDMA2000 1X, CDMA2000 1xEV-DO Rev. 0) and an application server connected to the MT8815B, or a PC client connected to the terminal, and various application tests.

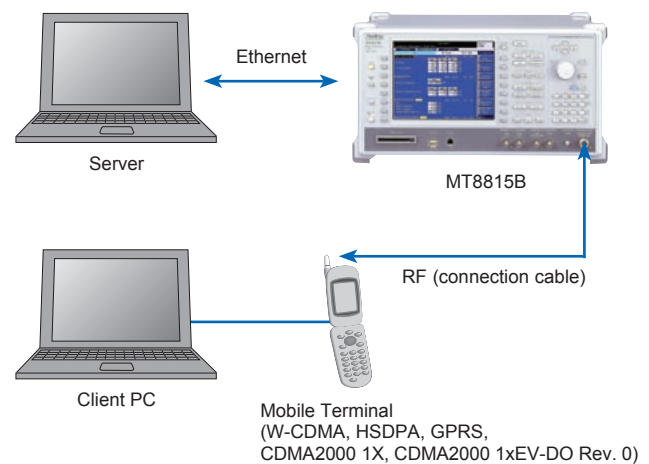

Sample MT8815B connection

- \* Any of MX882001C-002, MX882002C-002, MX882006C-002, MX882050C-002, MX882050C-011, or MX882051C-002 separately required



# Supports Multi-System Call Processing Tests


## Call Processing Tests

## Video Phone Test

### End-to-End Video Phone Test

The MT8815B supports two-way tests between W-CDMA (TD-SCDMA) terminals with video functions via the MT8815B Ethernet port.

Two-way video phone tests require two MT8815B units.

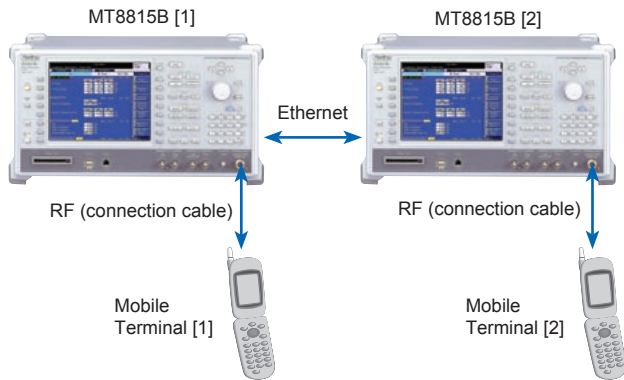

**Sample MT8815B connection**


Read the MX882000C and MX882007C catalog for details

## CDMA2000 1X/1xEV-DO (Rev. 0) Synchronous Function

### CDMA2000 1X/1xEV-DO (Rev. 0) Hybrid Terminal Function Test

By using the MX882002C and MX882006C with two MT8815B units, the CDMA2000 1X and 1xEV-DO (Rev. 0) forward link signals can be output with synchronized system times, supporting function tests of both CDMA2000 1X and 1xEV-DO (Rev. 0) mobile terminals.

- \*: This function cannot be used when MX882000C W-CDMA Measurement Software or MX882007C TD-SCDMA Measurement Software is loaded. Please perform unload, when MX882000C or MX882007C is loaded.
- \*: Installing the MX882006C-011 option supports the mobile terminal connection test with ETAP only.

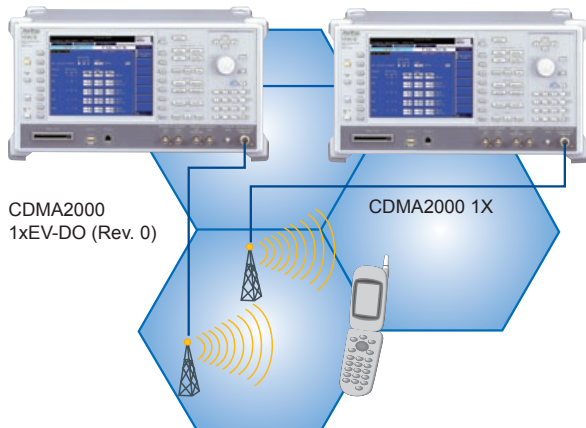


**Sample MT8815B connection: When MT8815B is two sets**

Refer to the MX882002C/MX882006C catalog for details.

## Call Processing

### Connection Test

Various connection tests, such as registration, origination, termination, handover, terminal disconnect, and network disconnect, can be tested using the call processing functionality. Moreover, voice from the mobile terminal can be echoed back while calling to test simple voice communications.

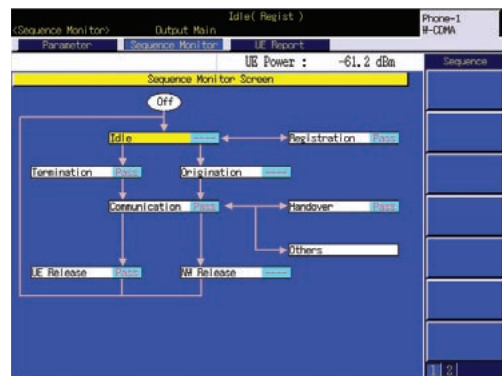

Sequence Monitor (W-CDMA)

### Mobile Terminal Report Monitor

The mobile terminal status can be displayed as a periodic report sent by the mobile terminal to the MT8815B. The downlink RF signal level at the mobile receiver can be checked with the Rx level reported from the mobile terminal.



Mobile Terminal Report Monitor (GSM)

# Excellent Cost-performance Solution

Perfect RF Adjustment and Test Solution for Mobile Production Lines

## Manufacturer Test Suite

### Basic Configuration

Call processing functions are not required for RF adjustments, and are only rarely required for RF parametric tests. Consequently, the basic configuration of Manufacturer Test Suite offers signal generator and signal analyzer functions without call processing, and is ideal for making RF adjustments and RF parametric tests in the test mode (mobile controlled by external PC).

#### W-CDMA

MT8815B	Radio Communication Analyzer
MT8815B-031	W-CDMA Measurement Hardware Lite
MX882030C	W-CDMA Measurement Software Lite

#### GSM

MT8815B	Radio Communication Analyzer
MT8815B-032	TDMA Measurement Hardware Lite
MX882031C	GSM Measurement Software Lite


### RF Adjustment

The basic configuration with signal generator and signal analyzer functions supports RF adjustments using traditional adjustment methods. Installing the adjustment software option cuts the RF adjustment time because the chipset adjustment function is used.

### RF Parametric Test


The RF parametric tests control the mobile terminal in the test mode or with call processing. The basic configuration performs RF parametric tests in the test mode but installing the call processing software option adds support for RF parametric tests with call processing.

Mobile Terminal Manufacturing Phase



Target Phase of Manufacturer Test Suite

### Example of Manufacturer Test Suite Options Stack (W-CDMA)

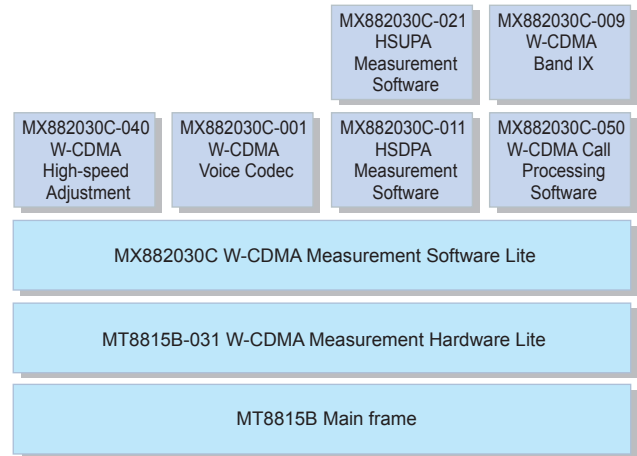


### Example of Manufacturer Test Suite Options Stack

- \* Installing the option supports W-CDMA/HSDPA/HSUPA and GSM/GPRS/EGPRS in Manufacturer Test Suite.
- \* Manufacturer Test Suite does not support real-time processing functions, such as external packet data and video phone tests.
- \* MX882030C-001 W-CDMA Voice Codec function requires MT8815B-011.

# High-accuracy Tests at Repair and Maintenance


## Compact, High-accuracy, High-speed Tester

The MT8815B is a compact high-accuracy, high-speed tester for single RF measurements made at manufacturing, repair, and maintenance of mobile terminals. It is the ideal solution for service points (sales offices) and repair centers when used in combination with the MT8510B Service Tester, because the MT8510B offers simple No/No-Go troubleshooting while the MT8815B diagnoses faults in detail using additional tests and higher-accuracy measurements.

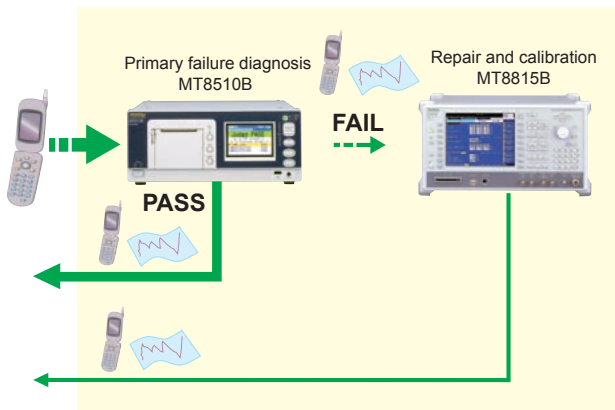




# MT8815B Panel Layout

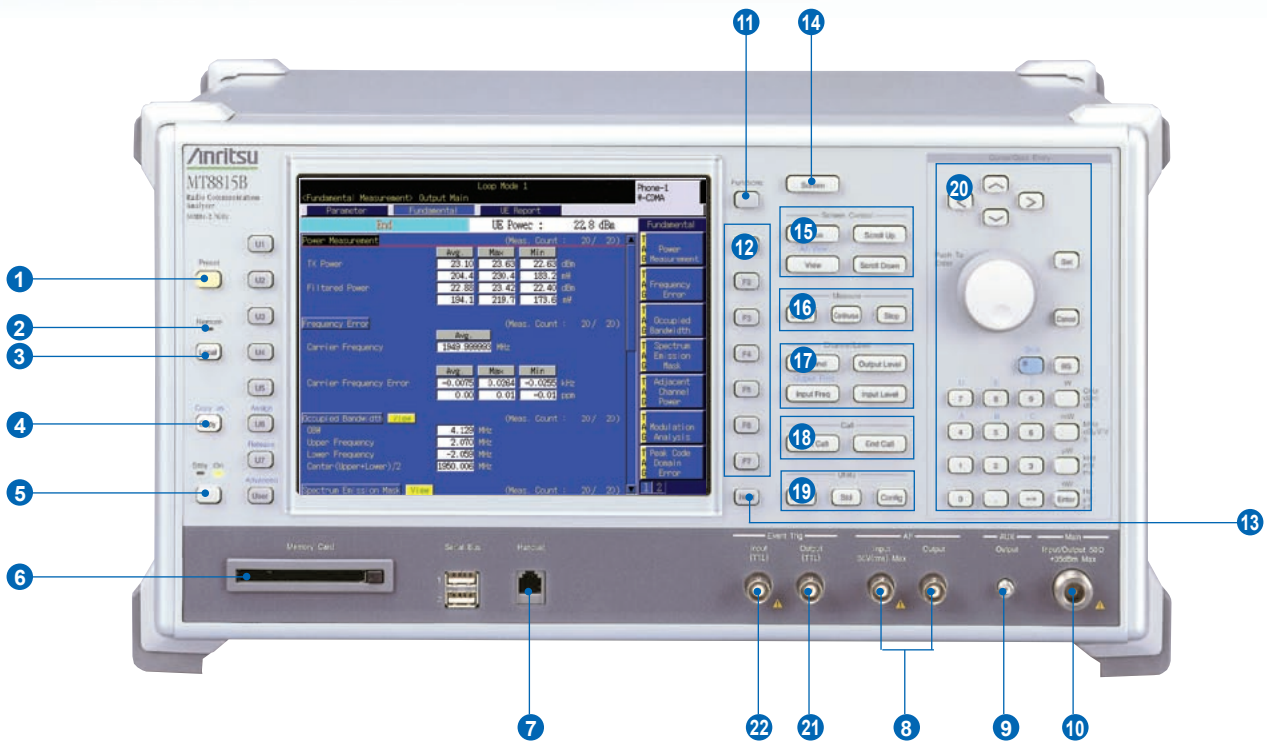

- 1 **Preset Key:** Starts initializing
- 2 **Remote Lamp:** Lit while in remote control mode
- 3 **Local Key:** Switches remote control to manual control
- 4 **Copy Key:** Copies screen
- 5 **Power Switch:** Switches mode between power-on and standby
- 6 **Memory Card Slot:** For saving/recalling measurement parameters and update software to/from PCMCIA-compliant PC-card-type memory card (Type II)
- 7 **Handset Connector:** For testing end-to-end voice communication between MT8815B and mobile terminal using handset
- 8 **AF Input/Output Connector:** For audio measurement
- 9 **AUX Output Connector:** Outputs RF signal for RF testing mobile terminal (SMA connector)
- 10 **Main Input/Output Connector:** Outputs RF signal for RF testing mobile terminal (N-type connector)
- 11 **Functions:** Displays function menu on screen
- 12 **Function Key:** Executes function menu displayed on right of screen
- 13 **Page Switch Key:** Switches function menu displayed on right of screen
- 14 **Screen Switch Key:** Switches screen
- 15 **Screen Control:** Switches display window for manual operation
- 16 **Measure:** Starts and stops measurement
- 17 **Channel/Level:** Sets channel, frequency, and level
- 18 **Call:** Connects and disconnects call
- 19 **Utility:** Saves and recalls parameters, and displays configuration
- 20 **Cursor/Data Entry:** Moves cursor and sets parameters
- 21 **Trigger Output Connector:** Outputs event-timing signal to external equipment (BNC connector)
- 22 **Trigger Input Connector:** Inputs trigger signal from external equipment to measure uplink signal from mobile equipment by synchronizing (BNC connector)

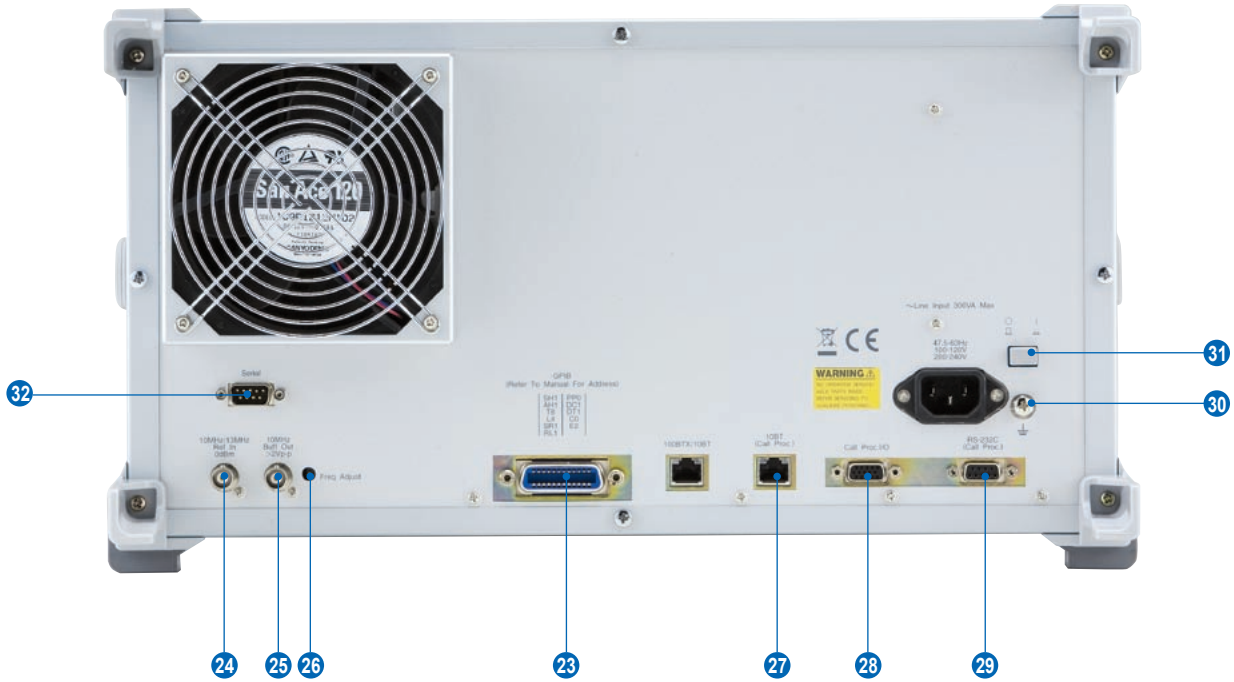

- 23 **GPIB Connector:** For remote control of MT8815B
- 24 **Reference Signal Input Connector:** Inputs 10/13 MHz reference signal (BNC connector)
- 25 **Reference Signal Output Connector:** Outputs 10 MHz reference signal of MT8815B (BNC connector)
- 26 **Frequency Adjust:** Adjusts frequency of internal reference oscillator
- 27 **10BASE-T Port:** Interface for packet and W-CDMA video communication test
- 28 **Call Processing Input/Output Port:** Interface for BER measurement and synchronization
- 29 **RS-232C Port:** Interface for packet communication test
- 30 **Grounding Terminal:** Connected to ground potential
- 31 **Main Power Switch:** Switches main power on/off. The front-panel power switch enters the standby (Stby) mode when the main power is switched on.
- 32 **Serial port:** Interface for remote control via RS-232C (D-Sub 9 pin connector)

# Specifications

## MT8815B Radio Communication Analyzer

General	<p>Frequency range: 30 MHz to 2700 MHz            Max. input level: +35 dBm (Main)            Main I/O              Impedance: 50 <math>\Omega</math>              VSWR: <math>\leq 1.2</math> (&lt;1.6 GHz), <math>\leq 1.25</math> (1.6 GHz to 2.2 GHz), <math>\leq 1.3</math> (&gt;2.2 GHz)              Connector: N type            AUX output              Impedance: 50 <math>\Omega</math>              VSWR: <math>\leq 1.3</math> (at SG Output level: <math>\leq -10</math> dBm)              Connector: SMA type            Reference oscillator              Frequency: 10 MHz              Level: TTL              Startup characteristics: <math>\leq \pm 5 \times 10^{-8}</math> (at 10 min after startup referenced to frequency 24 h after startup)              Aging rate: <math>\leq \pm 2 \times 10^{-8}</math>/day, <math>\leq \pm 1 \times 10^{-7}</math>/year (referenced to frequency 24 h after startup)              Temperature characteristics: <math>\leq \pm 5 \times 10^{-8}</math>              Connector: BNC type            External reference input              Frequency: 10 MHz or 13 MHz (<math>\pm 1</math> ppm)              Level: <math>\geq 0</math> dBm              Impedance: 50 <math>\Omega</math>              Connector: BNC type</p>
RF Signal Generator	<p>Frequency              Frequency range: 30 MHz to 2700 MHz (setting range: 0.4 MHz to 2700 MHz)              Setting resolution: 1 Hz              Accuracy: Due to reference oscillator accuracy            Output level              Level range: <math>-140</math> to <math>-10</math> dBm (Main), <math>-130</math> to <math>0</math> dBm (AUX)              Resolution: 0.1 dB              Accuracy: <math>\pm 1.0</math> dB (<math>-120</math> to <math>-10</math> dBm, Main, after calibration), <math>\pm 1.0</math> dB (<math>-110</math> to <math>0</math> dBm, AUX, after calibration)            Signal purity              Non-harmonic spurious: <math>\leq -50</math> dBc              Harmonics: <math>\leq -25</math> dBc            Uninterrupted level variation              Variable range: <math>0</math> to <math>-30</math> dB              Setting resolution: 0.1 dB</p>
Others	<p>Display              Color 8.4-inch TFT LCD, 640 x 480 dots            External control              GPIB: Control from external host with main unit as device (excluding some functions such as power-on),                  No external device control              Interface functions: SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C0, E2, RS-232C</p>
Power Supply	100 to 120 Vac/200 to 240 Vac ( $-15/+15\%$ , 250 V max.), 47.5 Hz to 63 Hz, $\leq 300$ VA (with all Options)
Dimensions and Mass	426 (W) x 221.5 (H) x 351 (D) mm (excluding projections), $\leq 17.8$ kg (with all Options)
Environmental Conditions	<p>Operating temperature and humidity: <math>0^\circ</math> to <math>+50^\circ\text{C}</math>, <math>\leq 95\%</math> (no condensation)            Storage temperature and humidity: <math>-20^\circ</math> to <math>+60^\circ\text{C}</math>, <math>\leq 95\%</math> (no condensation)            EMC              EN61326-1, EN61000-3-2            LVD              EN61010-1</p>



# Ordering Information

Please specify the model/order number, name and quantity when ordering.  
The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name
MT8815B	<b>Main frame</b> Radio Communication Analyzer
	<b>Standard accessories</b>
CA68ADP	Power Cord, 2.6 m: 1 pc
W2778AE	CF card: 1 pc
	PC Card Adapter : 1 pc
	MT8815B/MT8820B Operation Manual (CD-ROM): 1 copy
MT8815B-001	<b>Options</b> W-CDMA Measurement Hardware
MT8815B-002	TDMA Measurement Hardware
MT8815B-003	CDMA2000 Measurement Hardware
MT8815B-004	1xEV-DO Measurement Hardware <sup>*1</sup>
MT8815B-005	1xEV-DO Measurement Hardware <sup>*1</sup>
MT8815B-007	TD-SCDMA Measurement Hardware
MT8815B-011	Audio Board
MT8815B-031	W-CDMA Measurement Hardware Lite
MT8815B-032	TDMA Measurement Hardware Lite
MT8815B-043	CDMA2000 Time Offset CAL For GPS SG (requires MT8815B-003 and MX882002C)
MT8815B-101	W-CDMA Measurement Hardware Retrofit
MT8815B-102	TDMA Measurement Hardware Retrofit
MT8815B-103	CDMA2000 Measurement Hardware Retrofit
MT8815B-104	1xEV-DO Measurement Hardware Retrofit <sup>*1</sup>
MT8815B-105	1xEV-DO Measurement Hardware Retrofit <sup>*1</sup>
MT8815B-107	TD-SCDMA Measurement Hardware Retrofit
MT8815B-111	Audio Board Retrofit
MT8815B-131	W-CDMA Measurement Hardware Lite Retrofit
MT8815B-132	TDMA Measurement Hardware Lite Retrofit
MT8815B-143	CDMA2000 Time Offset CAL For GPS SG Retrofit (requires MT8815B-003 and MX882002C)
MT8815B-177	TD-SCDMA Measurement Retrofit
	<b>Softwares</b>
MX882000C	W-CDMA Measurement Software (requires MT8815B-001 and MX88205xC)
MX882000C-001	W-CDMA Voice Codec (requires MT8815B-011 and MX882000C)
MX882000C-011	HSDPA Measurement Software (requires MT8815B-001, MX882000C, and MX882050C)
MX882000C-012	HSDPA H-Set 6 Throughput Test (requires MT8815B-001, MX882000C, MX882000C-011, and MX882050C)
MX882000C-013	HSDPA High Data Rate (requires MT8815B-001, MX882000C, MX882000C-011, and MX882050C)
MX882000C-021	HSUPA Measurement Software (requires MT8815B-001, MX882000C, MX882000C-011, and MX882050C)
MX882001C	GSM Measurement Software (requires MT8815B-002)
MX882001C-001	GSM Voice Codec (requires MT8815B-011 and MX882001C)
MX882001C-002	GSM External Packet Data (requires MX882001C)
MX882001C-011	EGPRS Measurement Software (requires MX882001C)
MX882001C-041	GSM High-speed Adjustment (requires MX882001C)
MX882002C	CDMA2000 Measurement Software (requires MT8815B-003)
MX882002C-001	CDMA2000 Voice Codec (requires MT8815B-011 and MX882002C)
MX882002C-002	CDMA2000 External Packet Data (requires MX882002C)
MX882003C	1xEV-DO Measurement Software (requires MT8815B-003, MT8815B-004, and MX882002C)
MX882003C-002	1xEV-DO External Packet Data (requires MX882003C)
MX882005C	PHS Measurement Software (requires MT8815B-002)
MX882005C-011	Advanced PHS Measurement Software (requires MX882005C)
MX882006C	1xEV-DO Measurement Software (requires MT8815B-003, MT8815B-005, and MX882002C)
MX882006C-002	1xEV-DO External Packet Data (requires MX882006C)
MX882006C-011	1xEV-DO Rev. A Measurement Software (requires MX882006C)
MX882007C	TD-SCDMA Measurement Software (requires MT8815B-001 and MT8815B-007)
MX882007C-001	TD-SCDMA Voice Codec (requires MT8815B-011 and MX882007C)
MX882007C-003	TD-SCDMA Video Phone Test (requires MX882007C)
MX882007C-011	TD-SCDMA HSDPA Measurement Software <sup>*2</sup> (requires MT8815B-001, MT8815B-007, and MX882007C)
MX882007C-021	TD-SCDMA HSDPA Measurement Software <sup>*2</sup> (requires MT8815B-001, MT8815B-007, MX882007C, and MX882007C-011)
MX882030C	W-CDMA Measurement Software Lite (requires MT8815B-031)
MX882030C-001	W-CDMA Voice Codec (requires MT8815B-011 and MX882030C)
MX882030C-008	W-CDMA Band XI <sup>*2</sup> (requires MX882030C-050)
MX882030C-009	W-CDMA Band IX <sup>*2</sup> (requires MX882030C-050)
MX882030C-011	HSDPA Measurement Software (requires MX882030C)
MX882030C-021	HSUPA Measurement Software (requires MX882030C and MX882030C-011)
MX882030C-040	W-CDMA High-speed Adjustment (requires MX882030C)
MX882030C-050	W-CDMA Call Processing Software <sup>*2, *3</sup> (requires MX882030C)
MX882031C	GSM Measurement Software Lite (requires MT8815B-032)
MX882031C-001	GSM Voice Codec (requires MT8815B-011 and MX882031C)
MX882031C-011	EGPRS Measurement Software (requires MX882031C)
MX882031C-040	EGPRS Predistortion Adjustment (requires MX882031C)
MX882031C-041	GSM High-speed Adjustment (requires MX882031C)
MX882031C-050	GSM Call Processing Software (requires MX882031C)
MX882050C	W-CDMA Call Processing Software <sup>*2</sup> (requires MX882000C)
MX882050C-002	W-CDMA External Packet Data <sup>*2, *3</sup> (requires MX882050C)
MX882050C-003	W-CDMA Video Phone Test <sup>*2</sup> (requires MX882050C)
MX882050C-008	W-CDMA Band XI <sup>*2</sup> (requires MX882050C)
MX882050C-009	W-CDMA Band IX <sup>*2</sup> (requires MX882050C)
MX882050C-011	HSDPA External Packet Data <sup>*2</sup> (requires MX882000C-011)
MX882070C	W-CDMA Ciphering Software <sup>*2</sup> (requires MX882050C)
MX882051C	W-CDMA Call Processing Software <sup>*2</sup> (requires MX882000C)
MX882051C-002	W-CDMA External Packet Data <sup>*2</sup> (requires MX882051C)
MX882051C-003	W-CDMA Video Phone Test <sup>*2</sup> (requires MX882051C)
MX882071C	W-CDMA Ciphering Software <sup>*2</sup> (requires MX882051C)
MT8815B-ES210	<b>Warranty</b> Extended Two Year Warranty Service
MT8815B-ES310	Extended Three Year Warranty Service
MT8815B-ES510	Extended Five Year Warranty Service
	<b>Application parts</b>
P0019	TEST USIM001 <sup>*4</sup>
P0035B	W-CDMA/GSM Test USIM
A0058A	Handset
J1249	CDMA2000 Cable [D-Sub (15 pin, P-type) · D-Sub (15 pin, P-type), used in combination with J1267 (sold separately)]
J1267	CDMA2000 Cross Cable [D-Sub (9 pin, P-type) · D-Sub (9 pin, P-type), reverse cable used in combination with J1249 (sold separately)]
J0576B	Coaxial Cord (N-P · 5D-2W · N-P), 1 m
J0576D	Coaxial Cord (N-P · 5D-2W · N-P), 2 m
J0127A	Coaxial Cord (BNC-P · RG58A/U · BNC-P), 1 m
J0127C	Coaxial Cord (BNC-P · RG58A/U · BNC-P), 0.5 m
J0007	GPIB Cable, 1 m
J0008	GPIB Cable, 2 m
MN8110B	I/O Adapter (for call processing I/O)
B0332	Joint Plate (4 pcs/set)
B0612A	Rack Mount Kit
B0544	Carrying Case (hard type, with protective cover and casters)
B0545	Carrying Case (hard type, with protective cover, without casters)
W2776AE	MT8815B/MT8820B Operation Manual (booklet)
W2765AE	MX882000C Operation Manual (booklet)
W2771AE	MX882001C Operation Manual (booklet)
W2790AE	MX882002C Operation Manual Panel Operation (booklet)
W2791AE	MX882002C Operation Manual Remote Control (booklet)
W2793AE	MX882003C Operation Manual Panel Operation (booklet)
W2794AE	MX882003C Operation Manual Remote Control (booklet)
W2769AE	MX882005C Operation Manual (booklet)
W2930AE	MX882006C Operation Manual (booklet)
W2931AE	MX882006C Operation Manual Remote Control (booklet)
W2940AE	MX882007C Operation Manual (booklet)
W2894AE	MX882030C Operation Manual (booklet)
W2895AE	MX882031C Operation Manual (booklet)
W2767AE	MX88205xC Operation Manual (booklet)
W2773AE	MX88207xC Operation Manual (booklet)

\*1: The MT8815B-004 hardware supports IS-856-0 (1xEV-DO Rev. 0) RF measurements but does not support IS-856-A (1xEV-DO Rev. A) measurements.

The MT8815B-005 hardware supports both IS-856-0 (1xEV-DO Rev. 0) and IS-856-A (1xEV-DO Rev. A) RF measurements.

\*2: For terminal connectivity, contact your Anritsu sales representative.

\*3: These options preinstall the integrity protection function.

\*4: This Test USIM can be worked on only W-CDMA mode. When the connection of GSM or TD-SCDMA is necessary, P0035B can be applied.

- ParallelPhone™ is a registered trademark of Anritsu Corporation.
- CompactFlash® card is a registered trademark of SanDisk Corporation in the United States and is licensed to CFA (Compact Flash Association).

## Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan  
Phone: +81-46-223-1111  
Fax: +81-46-296-1238

## • U.S.A.

### Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,  
TX 75081, U.S.A.  
Toll Free: 1-800-267-4878  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

## • Canada

### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

## • Brazil

### Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27 - 1 Andar  
01327-010-Paraiso-São Paulo-Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

## • Mexico

### Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
11520 México, D.F., México  
Phone: +52-55-1101-2370  
Fax: +52-55-5254-3147

## • U.K.

### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

## • France

### Anritsu S.A.

16/18 avenue du Québec-SILIC 720  
91961 COURTABOEUF CEDEX, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

## • Germany

### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

## • Italy

### Anritsu S.p.A.

Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

## • Sweden

### Anritsu AB

Borgarfjordsgatan 13, 164 40 KISTA, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

## • Finland

### Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

## • Denmark

### Anritsu A/S

Kirkebjerg Allé 90, DK-2605 Brøndby, Denmark  
Phone: +45-72112200  
Fax: +45-72112210

## • Russia

### Anritsu EMEA Ltd.

#### Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.  
Russia, 125009, Moscow  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

## • United Arab Emirates

### Anritsu EMEA Ltd.

#### Dubai Liaison Office

P O Box 500413 - Dubai Internet City  
Al Thuraya Building, Tower 1, Suit 701, 7th Floor  
Dubai, United Arab Emirates  
Phone: +971-4-3670352  
Fax: +971-4-3688460

## • Singapore

### Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)  
Singapore 118502  
Phone: +65-6282-2400  
Fax: +65-6282-2533

## • India

### Anritsu Pte. Ltd.

#### India Branch Office

3rd Floor, Shri Lakshminarayan Niwas, #2726, 80 ft Road,  
HAL 3rd Stage, Bangalore - 560 075, India  
Phone: +91-80-4058-1300  
Fax: +91-80-4058-1301

## • P.R. China (Hong Kong)

### Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong  
Phone: +852-2301-4980  
Fax: +852-2301-3545

## • P.R. China (Beijing)

### Anritsu Company Ltd.

#### Beijing Representative Office

Room 2008, Beijing Fortune Building,  
No. 5, Dong-San-Huan Bei Road,  
Chao-Yang District, Beijing 100004, P.R. China  
Phone: +86-10-6590-9230  
Fax: +86-10-6590-9235

## • Korea

### Anritsu Corporation, Ltd.

8F Hyunjuk Building, 832-41, Yeoksam Dong,  
Kangnam-ku, Seoul, 135-080, Korea  
Phone: +82-2-553-6603  
Fax: +82-2-553-6604

## • Australia

### Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,  
Victoria 3168, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

## • Taiwan

### Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

Please Contact: