


**CX86500 Modem Block Diagram**  
\*38-pin version only

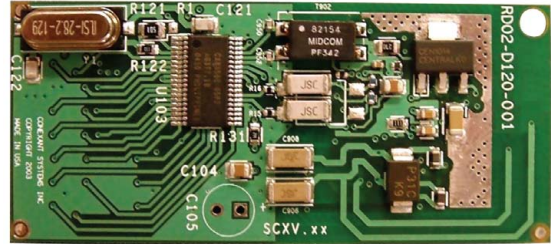

**26mm x 59mm**  
**CX86500 Modem Reference Design**

## CX86500 Features

- **Modulations and protocols**
  - ITU-T V.92: Quick Connect, Modem-on-Hold and PCM upstream
  - V.90/V.34/V.32bis/V.32
  - V.22bis/V.22/V.23/V.21
  - V.23 reverse, V.23 half-duplex
  - Bell 212A/Bell 103
  - V.29 FastPOS and V22bis fast connect
  - V.80 Synchronous Access Mode
- **V.44/V.42bis/MNP5 data compression**
- **V.42/MNP2-4 Error correction**
- **Call waiting (CW) detection for selected countries**
- **DTE/host interface**
  - Serial DTE interface
  - Parallel 16550 UART-compatible host interface (38-pin version only)
  - Direct mode
  - Synchronous mode and asynchronous mode
- **Hardware and software flow control and speed buffering**
- **Embedded and upgradable 63 country profiles**
- **Serial NVRAM interface for optional country profile storage (38-pin version only)**
- **Full-duplex 8-bit/16-bit PCM voice pass-through mode**
- **Selectable 28.224 MHz or 27.000 MHz frequency of operation**
- **Worldwide operation**
  - Complies to TBR21 and other country requirements
  - Type I and Type II Caller ID (CID) decoding for selected countries
  - Call progress, blacklisting
  - Meets worldwide DC mask requirements
- **Low power and voltage**
  - Single +3.3 V supply
  - Low power consumption mode
  - +3.3 V I/O level
- **Compact, robust board design**
  - Small, low-profile modem packages
  - Reference design supports 5KV isolation

### SmartDAA Features

- **Extension pick-up detection**
- **Digital line protection**
- **Line reversal detection**
- **Remote hang-up detection**
- **Worldwide compliance**

## Conexant Product Portfolio

The company's broad portfolio of semiconductor products also includes client-side DSL, cable, and dial-up modem solutions; fiber optic system-on-chips; broadcast video encoders and decoders; digital set-top box components and systems solutions; and IEEE 802.11a/b/g/n-compliant WLAN chipsets. Additional products include a complete line of asymmetric and symmetric DSL central office solutions, which are used by service providers worldwide to deliver broadband data, voice, and video over copper telephone lines.

© 2004, Conexant Systems, Inc. All Rights Reserved. Conexant and the Conexant logo are registered trademarks of Conexant Systems, Inc. All other trademarks are owned by their respective owners. Although Conexant strives for accuracy in all its publications, this material may contain errors or omissions and is subject to change without notice. **THIS MATERIAL IS PROVIDED AS IS AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.** Conexant shall not be liable for any special, indirect, incidental or consequential damages as a result of its use.

**www.conexant.com**  
**General Information:**  
 U.S. and Canada: (888) 855-4562  
 International: 1+ (949) 483-3000  
**Headquarters**  
 4000 MacArthur Blvd.  
 Newport Beach, CA 92660  
 Doc# PBR-200567

