

DEPARTMENT OF THE ARMY TECHNICAL BULLETIN

OPERATION OF LS-671 LOUDSPEAKER WITH SINGARS RADIO SETS

Headquarters, Department of the Army, Washington, DC

1 APRIL 1993

REPORTING OF ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this technical bulletin. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and blank forms), direct to: Commander, U.S. Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LM-LT, Fort Monmouth, New Jersey 07703-5007. A reply will be furnished direct to you.

1. **Purpose.** This technical bulletin provides the information and procedures for operating the Loudspeaker-control unit, LS-671/VRC, with RT-B of a dual SINGARS family radio set configuration with RT-A, bottom RT, in operation with the AN/VIC-1 intercommunications system.

2. References

<u>PUBLICATION NUMBER</u>	<u>DATE</u>	<u>TITLE</u>
TM 11-5820-890-10-1	1 September 1992	SINGARS ICOM Ground Combat Net Radio
TM 11-5820-890-10-3	1 September 1992	SINGARS NON-ICOM Ground Combat Net Radio

Approved for public release; distribution is unlimited.

3. LS--671 Installation/Operation.

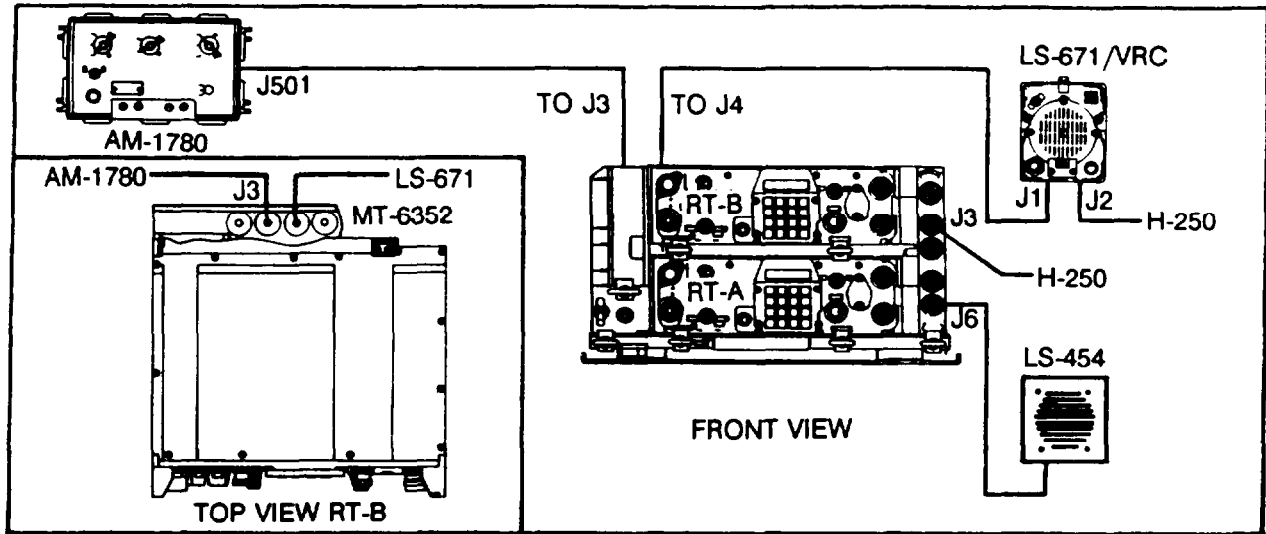


Figure 1. LS-671 Cabling to Dual Radio Set

a. Ensure that SINGGARS radio set is properly mounted and that cabling is in accordance with applicable operator technical manual and that pre-mission check for the radio set is performed.

b. **Cabling Instructions:**

- (1) Connect cables from J501 connector on AM-1780/VRC to J3 connector on the mounting adapter, MT-6352. This connects RT-A to the AN/VIC-1 system.
- (2) Connect cable (CX-13292) from J1 connector on LS-671 to J4 connector on the mounting adapter, MT-6352 to use LS-671 with RT-B.
- (3) Connect handset, H-250, to J2 connector on LS-671 to use with RT-B.
- (4) Connect LS-454 to J6 connector on amplifier adapter, AM-7239, for use with RT-A
- (5) Conned handset, H-250, to J3 connector on amplifier adapter, AM-7239, for use with RT-A

c. **Switch Setting and Operations:**

- (1) Turn the LS-671 power function switch to the on position and the volume control knob to the mid-range position.
- (2) Turn the volume control knob on RT-B to the minimum position (turn fully counter-clockwise).
- (3) Turn the volume control knob of RT-A to the mid-range position.
- (4) Place CB1 switch on the AM-7239 to the on position.


- (5) Establish normal voice communications with RT-A using handset, H-250, connected to the amplifier adapter, AM-7239, or with a CVC Helmet connected to the AN/VIC-1 intercommunications system.
- (6) Establish normal voice communication with RT-B using handset, H-250, connected to the LS-671. RT-B volume can be controlled through LS-671 volume control.

d. **Troubleshooting and Other Operations:** See referenced operator technical manuals.

By Order of the Secretary of the Army:

GORDON R. SULLIVAN
General, United States Army
Chief of Staff

Official:



MILTON H. HAMILTON
Administrative Assistant to the
Secretary of the Army

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36-E, block 9453,
requirements for TB 11-5820-890-10-14.

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG

WITH THIS PUBLICATION?



THEN . . . JOT DOWN THE DOPE ABOUT IT ON THIS FORM, FOLD IT, AND DROP IT IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

PUBLICATION DATE

PUBLICATION TITLE

BE EXACT . . . PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO.

PARA-GRAPH

FIGURE NO.

TABLE NO.

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

