

MUR105-MUR160

1 AMP ULTRA FAST RECTIFIER

FEATURES

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding "-PBF" suffix.

MAXIMUM RATINGS

Rating	Symbol	MUR105	MUR110	MUR115	MUR120	MUR130	MUR140	MUR160	Unit
Peak repetitive reverse voltage	V_{RRM}								
Working peak reverse voltage	V_{RWM}	50	100	150	200	300	400	600	V
DC blocking voltage	V_R								
Average rectified forward current (square wave) Mounting method per note 2	$I_{F(AV)}$	1.0 @ $T_A = 130^\circ\text{C}$			1.0 @ $T_A = 120^\circ\text{C}$				A
Non-repetitive peak surge current (surge applied at rated load conditions halfwave, single phase, 60Hz)	I_{FSM}	35							A
Operating and storage junction temperature range	T_J, T_{stg}	-65 to +175							$^\circ\text{C}$
Maximum thermal resistance Junction to ambient	$R_{\theta JA}$	Note 2							$^\circ\text{C}/\text{W}$

Stresses exceeding maximum ratings may damage the device. Maximum ratings are stress ratings only. Functional operation above the recommended operating conditions is not implied. Extended exposure to stresses above the recommended operating conditions may affect the device reliability.

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	MUR105	MUR110	MUR115	MUR120	MUR130	MUR140	MUR160	Unit
Maximum instantaneous forward voltage ⁽¹⁾ ($I_F = 1.0\text{A}, T_J = 150^\circ\text{C}$) ($I_F = 1.0\text{A}, T_J = 25^\circ\text{C}$)	V_F		0.710			1.050	1.250		V
Maximum instantaneous reverse current ⁽¹⁾ (Rated dc voltage, $T_J = 150^\circ\text{C}$) (Rated dc voltage, $T_J = 25^\circ\text{C}$)	I_R		50			150	5.0		μA
Maximum reverse recovery time ($I_F = 1.0\text{A}, di/dt = 50\text{A}/\mu\text{s}$) ($I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{REC} = 0.25\text{A}$)	t_{rr}		35			75	50		ns
Maximum forward recovery time ($I_F = 1.0\text{A}, di/dt = 100\text{A}/\mu\text{s}$, recovery to 1.0V)	t_{fr}		25			50			ns

Note 1: Pulse test: Pulse width = 300 μs , duty cycle $\leq 2.0\%$.


Note 2: PC board with 1 1/2" x 1 1/2" copper surface.

MUR105-MUR160

1 AMP ULTRA FAST RECTIFIER

MECHANICAL CHARACTERISTICS

Case	DO-41
Marking	Body painted, alpha-numeric
Polarity	Cathode band

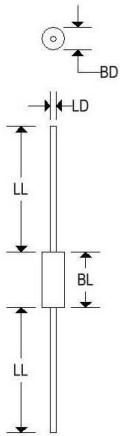

	DO-41			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	-	0.107	-	2.720
BL	-	0.205	-	5.207
LD	0.028	0.034	0.711	0.864
LL	1.000	-	25.400	-

MUR105-MUR160

1 AMP ULTRA FAST RECTIFIER

MUR105, MUR110, MUR115, MUR120

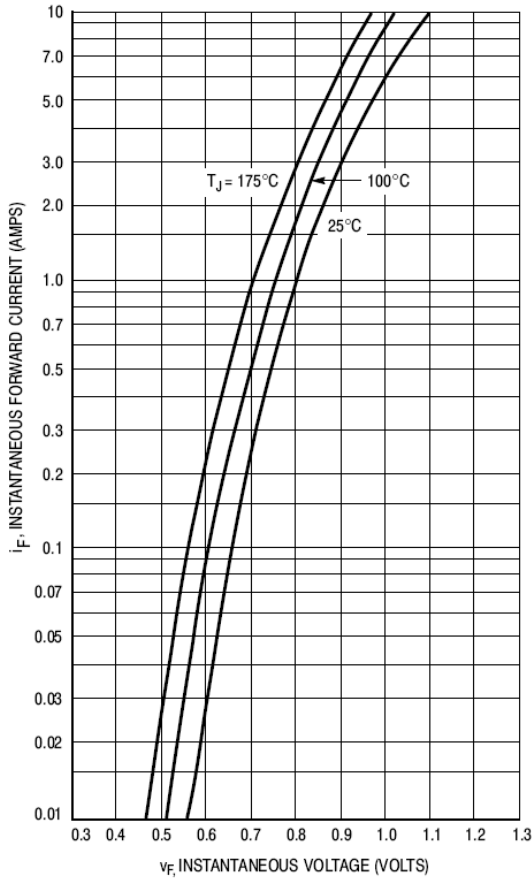


Figure 1. Typical Forward Voltage

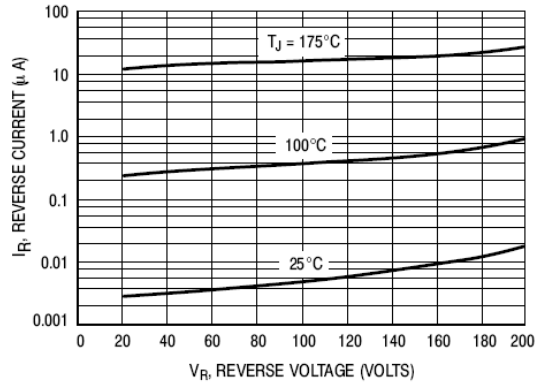


Figure 2. Typical Reverse Current*

* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

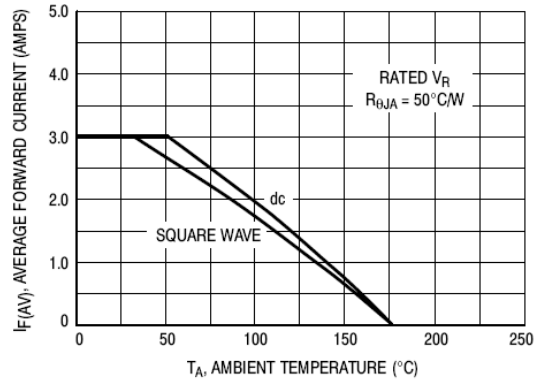


Figure 3. Current Derating
(Mounting Method #3 Per Note 1)

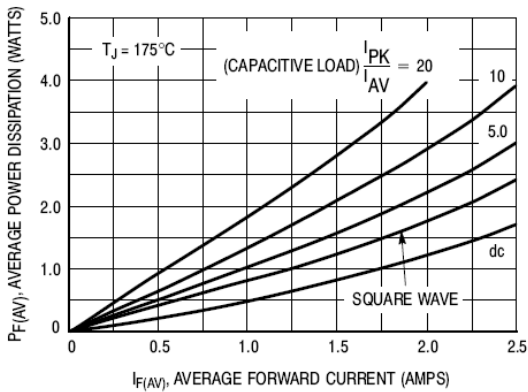


Figure 4. Power Dissipation

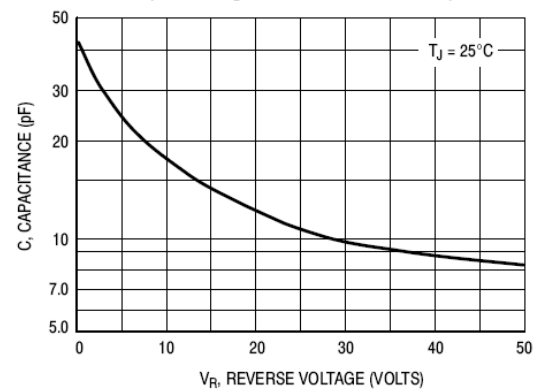


Figure 5. Typical Capacitance

MUR105-MUR160

1 AMP ULTRA FAST RECTIFIER

MUR130, MUR140, MUR160

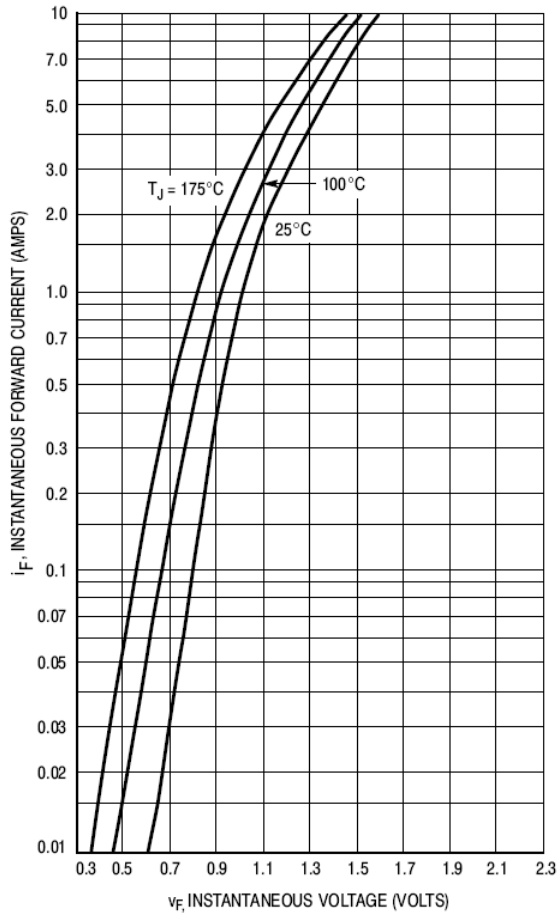


Figure 6. Typical Forward Voltage

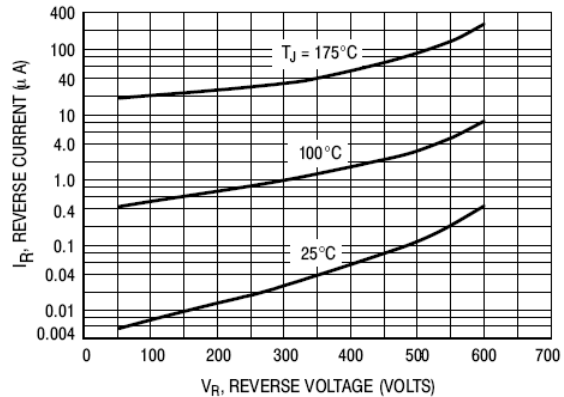


Figure 7. Typical Reverse Current*

* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

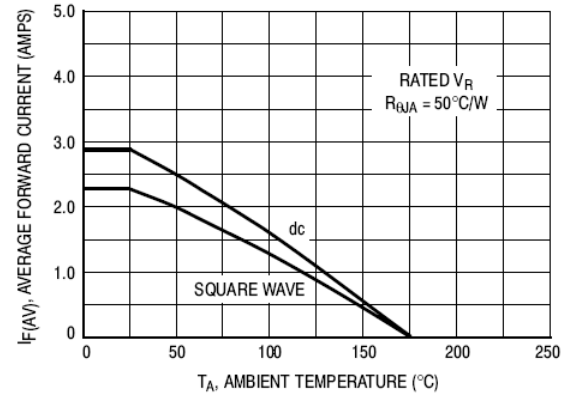


Figure 8. Current Derating
(Mounting Method #3 Per Note 2)

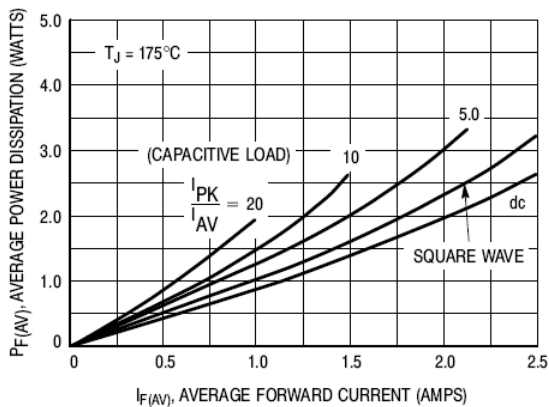


Figure 9. Power Dissipation

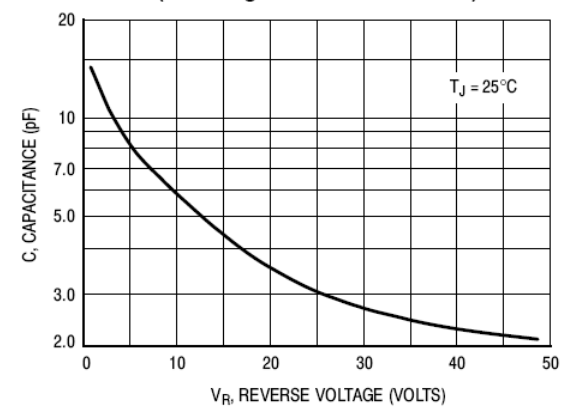


Figure 10. Typical Capacitance