

UZ706 SERIES

3 WATT ZENER DIODES

FEATURES

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding "-PBF" suffix.

MAXIMUM RATINGS

Zener Voltage, V_Z	6.8 to 400V
Continuous Current	See table
Surge Current (8.3 ms)	See table
Surge Power	See graph
Power	See lead temperature derating curve
Storage and Operating Temperature	-65 to +175°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

TYPE*	ELECTRICAL SPECIFICATIONS @ 25°C						MAXIMUM RATINGS		
	Nominal Zener Voltage † $V_Z @ I_{ZT}$	Test Current I_{ZT}	Max. Zener Impedance § $Z_Z @ I_{ZT}$	Maximum Reverse Leakage Current			Typ. Temp. Coefficient $T_C @ I_{ZT}$	Maximum Continuous Current ★ I_{ZM}	Maximum Surge Current ‡ I_S
				$I_R @ V_R$	+/- 5% V_R	+/-10% V_R			
+/- 5% Tolerance	Volts	mA	Ohms	µA	Volts	Volts	%/°C	mA	Amps
UZ706	6.8	75	2	500	5.2	4.9	.04	440	10.0
UZ707	7.5	75	2	300	5.7	5.4	.04	400	8.0
UZ708	8.2	75	3	200	6.2	5.9	.05	360	7.0
UZ709	9.1	75	3	100	6.9	6.6	.05	330	6.0
UZ710	10.0	75	4	40	7.6	7.2	.06	300	5.0
UZ712	12	65	5	10	9.1	8.6	.07	250	4.0
UZ713	13	50	6	10	9.9	9.3	.07	230	4.0
UZ714	14	50	6	10	10.6	10.1	.07	210	4.0
UZ715	15	50	6	10	11.4	10.8	.07	200	3.0
UZ716	16	50	7	5	12.2	11.5	.07	185	3.0
UZ718	18	40	8	5	13.7	12.9	.08	170	2.0
UZ720	20	40	9	5	15.2	14.4	.08	150	2.0
UZ722	22	30	10	5	16.7	15.8	.08	135	2.0
UZ724	24	30	10	5	18.2	17.3	.08	125	1.5
UZ727	27	25	12	1	20.6	19.4	.09	110	1.5
UZ730	30	25	15	1	22.8	21.6	.090	100	1.5
UZ733	33	20	21	1	25.1	23.7	.090	90	1.2
UZ736	36	20	21	1	27.4	25.9	.090	85	1.0
UZ740	40	20	27	1	30.4	28.8	.095	75	1.0

UZ706 SERIES

3 WATT ZENER DIODES

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

TYPE*	ELECTRICAL SPECIFICATIONS @ 25°C						MAXIMUM RATINGS		
	Nominal Zener Voltage † $V_Z @ I_{ZT}$	Test Current I_{ZT}	Max. Zener Impedance § $Z_Z @ I_{ZT}$	Maximum Reverse Leakage Current		Typ. Temp. Coefficient $T_C @ I_{ZT}$	Maximum Continuous Current ★ I_{ZM}	Maximum Surge Current ‡ I_S	
				$I_R @ V_R$	+/- 5% V_R				+/-10% V_R
+/- 5% Tolerance	Volts	mA	Ohms	µA	Volts	Volts	%/°C	mA	Amps
UZ745	45	15	37	1	34.2	32.4	.095	65	0.8
UZ750	50	15	50	1	38.0	36.0	.095	60	0.8
UZ756	56	10	70	1	42.6	40.3	.095	55	0.7
UZ760	60	10	70	1	45.7	43.2	.095	50	0.6
UZ770	70	10	90	1	53.3	50.5	.095	45	0.6
UZ775	75	10	100	1	56.0	54.0	.095	40	0.5
UZ780	80	10	115	1	60.8	57.7	.095	35	0.4
UZ790	90	8.0	150	1	68.5	64.8	.095	30	0.4


- Specify 20% voltage tolerance by changing first numeral of type number from 7 to 9 or from 1 to 3. Specify 10% voltage tolerance by changing first numeral of type number from 7 to 8 or from 1 to 2.
- † All zener voltages are measured with an automated test set using a 35 ms test time.
Longer or shorter test times will have a corresponding effect on the measured value due to heating effects.
- § Zener impedance is derived from the 60-cycle AC voltage created when AC current with RMS value of 10% of DC zener test current is superimposed on the test current.
- ★ Maximum current based on 3 watt rating,
- ‡ Figures shown are for a peak sinusoidal surge current of 8.3 ms duration using 60 cycle AC. The 8.3 ms square pulse rating is 71% of the value shown.

UZ706 SERIES

3 WATT ZENER DIODES

MECHANICAL CHARACTERISTICS

Case:	Digi A
Polarity:	Cathode band
V _F :	I _C = 1.0 A; V _F = 1.35 V Max

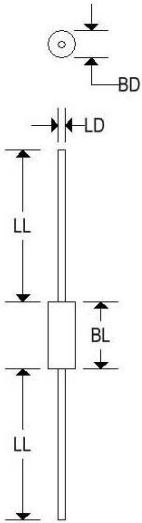

	Digi A			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	-	0.095	-	2.413
BL	-	0.180	-	4.572
LD	0.028	0.032	0.711	0.813
LL	0.700	-	17.800	-

