## **D9013L Frequency Doubler**

9.0 to 13.0 GHz



## **Technical Characteristics**

Absolute Maximum Ratings		
Operating Temperature:	-55 °C to +125° C	
Storage Temperature:	-65 °C to +150° C	
Pk Power For Any Single Port	+23 dBm Peak @ +25°C	
Peak Input Current @ +25°C	100 mA	

## Product Export Classification


ECCN: EAR 99 (unless otherwise specified) HTS: 85543.70.8000

Specifications @ +25°C

## **Electrical Specifications**

Parameters	Min.	Typical	Max.	Units
Input Frequency	9.0		13.0	GHz
Output Frequency	18.0		26.0	GHz
Conversion Loss		11.5	13.0	dB
Input Power		10.0	13.0	dBm
Fundamental Isolation	28.0	35.0		dB
3rd Harmonic Suppression	25.0	35.0		dBc

Outline drawing

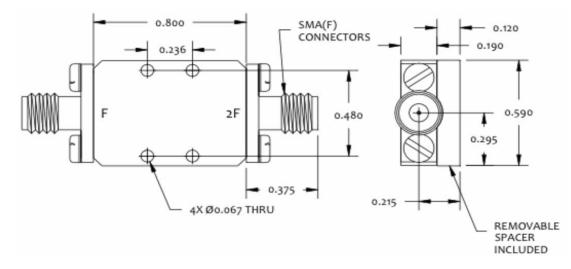



www.eclipseMDI.com

1.408.526.1100

