

### **Technical Characteristics**

Product Features
Fixed or adjustable attenuation tuning
Low insertion loss
SMA connector standard
Impedance 50 or 75 ohms
Compact size
Meets MIL-E-5400 and MIL-E-16400 environmental requirements

Maximum Ratings	
Max. Input Power	250mW
Operating Temperature	-55 to +95°C
Storage Temperature	-65 to +125°C
Specifications @	25°C


## **Maximum Ratings**

ECCN: EAR 99 (Unless otherwise specified)

HTS: 8543.7080.00

Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Attenuation	1.0 to 2.0		3.0		dB	
Insertion Loss	2.0		0.5		dB	
VSWR	1.0 to 2.0		1.5:1			
Linearity	1.0 to 2.0		+/-0.5		dB	
Max. Input Power	1.0 to 2.0			250	mW	

## **Package Outline**

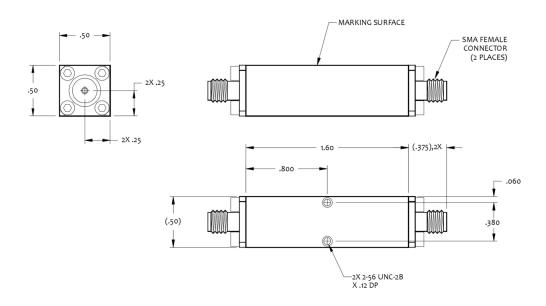

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

Copyright© EclipseMDI

Quality products that serve the industry. Today and tomorrow.








# **EQN0102-03 Negative Slope Equalizer**

1.0 to 2.0 GHz



### **Test Data**

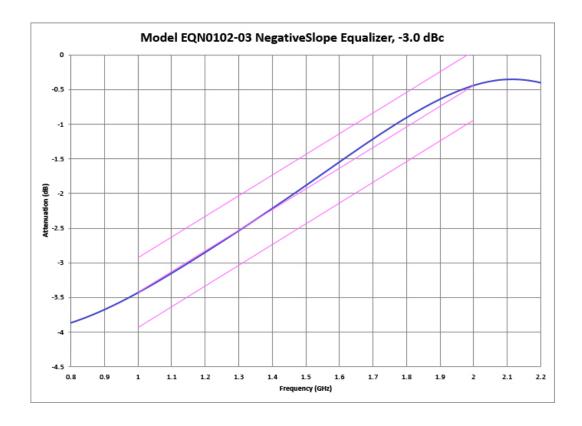

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

