


Technical Characteristics

Product Features	Maximum Ratings		
Fixed or adjustable attenuation tuning	Max. Input Power	250mW	
Low insertion loss	Operating Temperature	-55 to +95°C	
SMA connector standard	Storage Temperature	-65 to +125°C	
Impedance 50 or 75 ohms	Specifications @	25°C	
Compact size Meets MIL-E-5400 and MIL-E-16400 environmental requirements	Maximum Ratings		
Meets Mit-E-5400 and Mit-E-16400 environmental requirements	ECCN: EAR 99 (Unless otherwise specified)		
	HTS: 8543.7080.00		

Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Attenuation	1.0 to 4.0		6.0		dB	
Insertion Loss	4.0		1.0		dB	
VSWR	1.0 to 4.0		1.8:1			
Linearity	1.0 to 4.0		+/-0.8		dB	
Max. Input Power	1.0 to 4.0			250	mW	

Package Outline

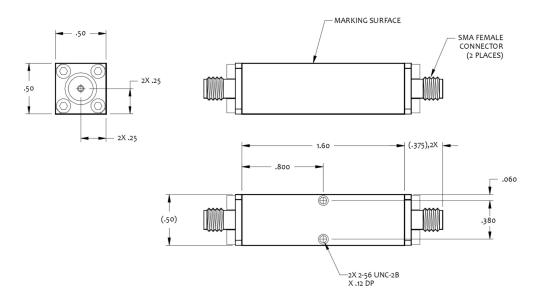

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

Copyright© EclipseMDI


1.408.526.1100

EQN0104-06 Negative Slope Equalizer

1.0 to 4.0 GHz





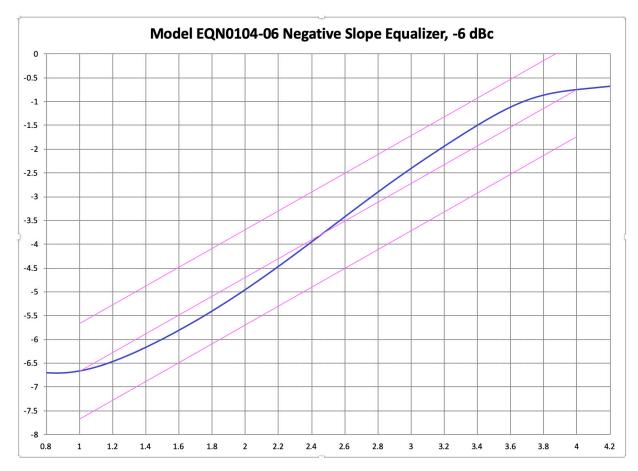

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19