

Technical Characteristics


Product Features
Fixed or adjustable attenuation tuning
Low insertion loss
SMA connector standard
Impedance 50 or 75 ohms
Compact size
Meets MIL-E-5400 and MIL-E-16400 environmental requirements

Maximum Ratings	
Max. Input Power	250mW
Operating Temperature	-55 to +95°C
Storage Temperature	-65 to +125°C
Specifications @	25°C

Maximum Ratings ECCN: EAR 99 (Unless otherwise specified) HTS: 8543.7080.00

Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Attenuation	6.0 to 18.0		3.0		dB	
Insertion Loss	18.0		1.0		dB	
VSWR	6.0 to 18.0		2.0:1			
Linearity	6.0 to 18.0		+/-0.5		dB	
Max. Input Power	6.0 to 18.0			250	mW	

Package Outline

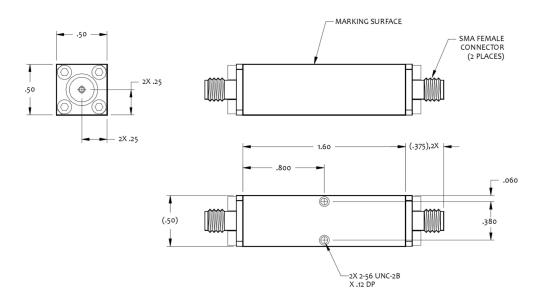

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19



EQN0618-03 Negative Slope Equalizer

6.0 to 18.0 GHz



Test Data

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

