


## **Technical Characteristics**

Product Features	Maximum Ratings			
Fixed or adjustable attenuation tuning	Max. Input Power	250mW		
Low insertion loss	Operating Temperature	-55 to +95°C		
SMA connector standard	Storage Temperature	-65 to +125°C		
Impedance 50 or 75 ohms	Specifications @	25°C		
Compact size Meets MIL-E-5400 and MIL-E-16400 environmental requirements	Maximum Ratings	Maximum Ratings		
	ECCN: EAR 99 (Unless otherwise specified)			
	HTS: 8543.7080.00			

Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Attenuation	7.0 to 11.0		4.0		dB	
Insertion Loss	11.0		0.8		dB	
VSWR	7.0 to 11.0		1.5:1			
Linearity	7.0 to 11.0		+/-0.5		dB	
Max. Input Power	7.0 to 11.0			250	mW	

## Package Outline

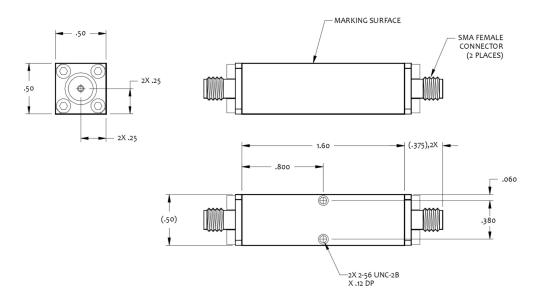

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

Copyright© EclipseMDI

ā


- 1.408.526.1100
- EclipseMDI

## EQN0711-04 Negative Slope Equalizer

7.0 to 11.0 GHz



Test Data

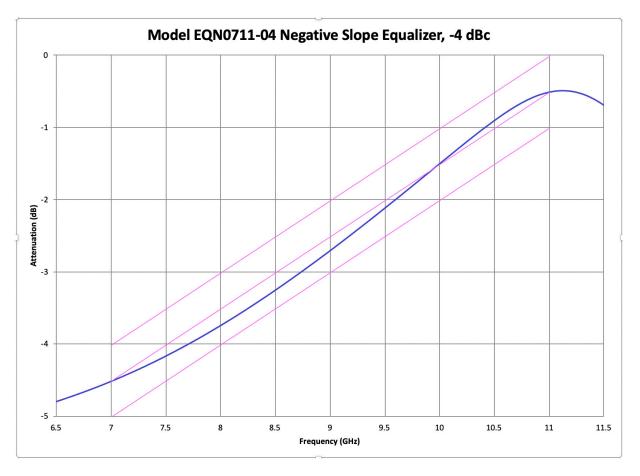

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

1.408.526.1100