

SWITCHED MODE POWER SUPPLIES

Type	CV	CC	Adjustment range
S 5-40	0 - 5 V	0 - 40 A	0 - 6 V
S 15-15	0 - 15 V	0 - 15 A	0 - 18 V
S 24-10	0 - 24 V	0 - 10 A	0 - 30 V


High efficiency: Typical 76 % at 5 V 40 A and 86 % at 24 V 10 A

Wide input voltage range: 185-265 V 50-60 Hz or 250-360 V DC
Or after connecting an internal link: 96-132 V 50-60 Hz

Soft start circuit for low inrush current during switch on.

Choke input to improve the waveform of the input current during operation.




Because of the nature of the off line rectifying circuit used in an SMPS, high peak currents are taken from the mains which cause line frequency distortion. This low frequency distortion is not rejected by the RFI input filter. To overcome this problem, in the S-series an extra iron cored LF choke is used as well as the RFI filter.

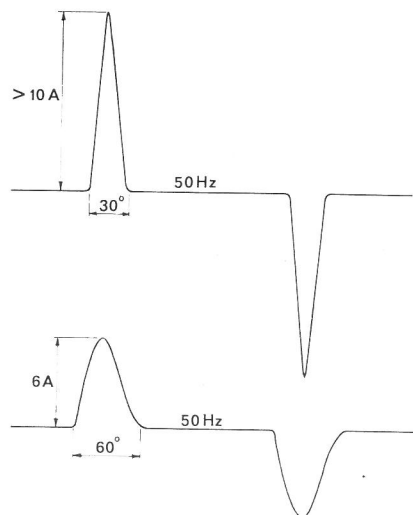




Input current of 240 W units of other manufacturers.

Input current of DELTA 240 W S-series.

Maximum output current as function of the output voltage with lowest AC line

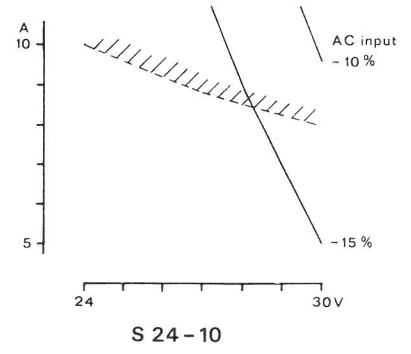

Constant Voltage / Constant Current regulation:




	CV	CC
Load regulation (0-100%)	10 mV	100 mA (S 5-40 200 mA)
Line regulation (185-265 V AC)	10 mV	50 mA (S 5-40 100 mA)
Ripple and noise RMS/p-p	20/50 mV	80/200 mA (S 5-40 200/500 m)
Temperature coeff. per °C	1.10^{-4}	1.10^{-3}
Recovery time	0.5 mS for recovery to within 30 mV after a load step from 10 to 100 %	
Output impedance at 100 kHz	0.1 Ohm	

Efficiency:

Typical 86% at 24 V 10 A
 80% at 15 V 15 A
 76% at 5 V 40 A

The efficiency is practically independent of the input voltage and still very good at lower output voltages and currents.


Input power at no load is about 6 Watts.

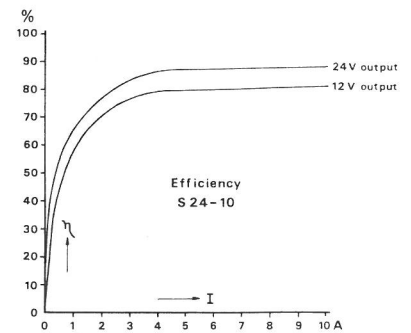

RFI suppression:

According to VDE 0875
 N-12 db on input
 N on output


Typical RFI suppression measured at the input of the S-series.

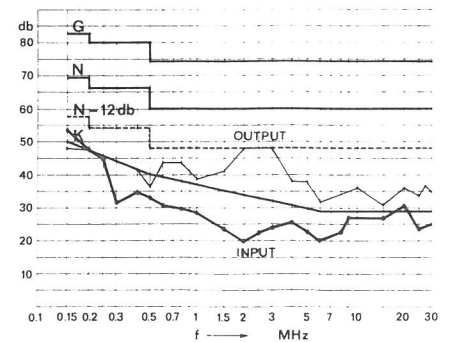

Hold-up time: An input voltage interruption of 35 mS max. (at 220 V AC) does not affect the output voltage.

Remote sensing:

Connections are provided for remote sensing at the load point. The Voltage drop should not exceed 1V per load line. The OVP has to be set higher accordingly.

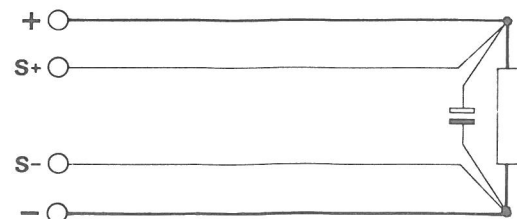


Remote programming:

The output voltage can be programmed by an external programming voltage.

The programming voltage ranges from 0 to approximately 6 V for full output swing.

To program voltage by voltage remove the link between pin 24 and pin 26 and connect the positive side of the programming voltage to pin 26 and the negative side to pin 14. The max. programming speed is 300 V/sec. However the electrolytic output capacitors will overheat at a combined high programming amplitude and repetition frequency.

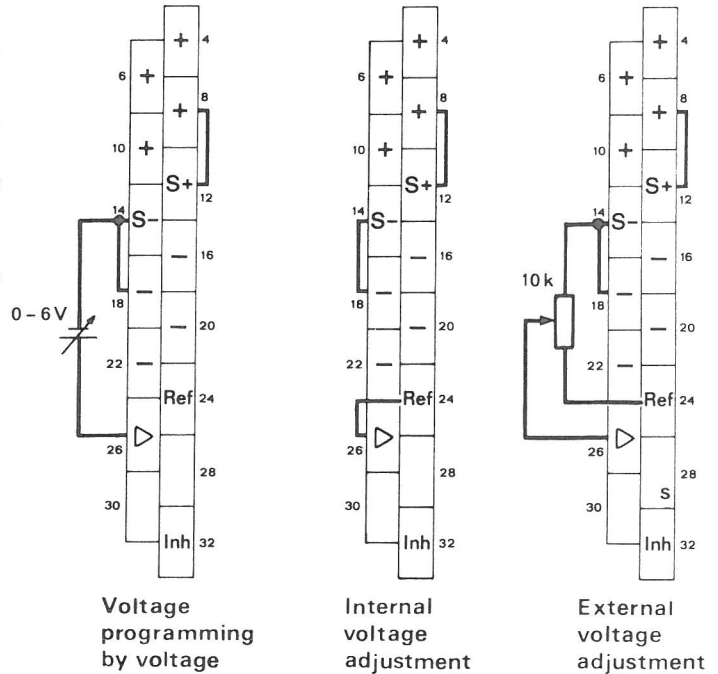

Logic inhibit function:

Logic 1 between INH (pin 32) and S- (pin 14) inhibits output.

Logic 0 between INH (pin 32) and S- (pin 14) enables output.

Parallel and series connection:


Is allowed up to 250 V combined sum

Adjustment of voltage, current and OVP:

By 20-turn screw adjustment through top cover

Led lamp on front panel indicates output state.

Current derating as function of ambient temperature and duty cycle:

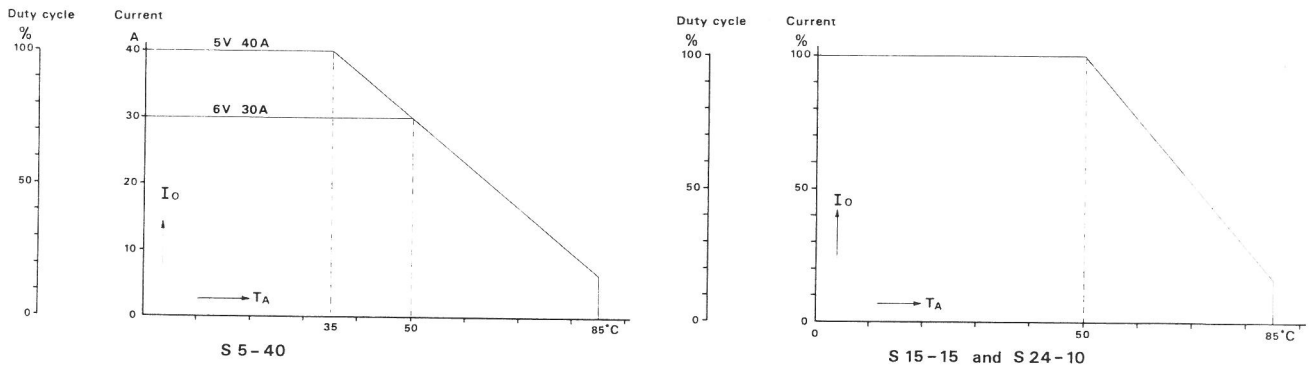

At a duty cycle lower than 100 % full output current is allowed at a higher ambient temperature. Restriction on duty cycle is: Max. on time 15 min.

Thermal shut down: At thermal overload the output shuts down.

Overload protection: May continuously be overloaded or short circuited.

Overvoltage protection: An electronic overvoltage protection shuts down the output if it exceeds the set value. The adjustment range is 5-35 V.

Delay caused by soft start: The output is available approximately 250 mS after switch-on.

Insulation:

Input - output
Input - case
Output - case

Test voltage

2.5 kV RMS (1 minute)
2.5 kV RMS (1 minute)
500 V RMS (1 minute)
500 V DC (continuously)

Resistance (measured at 500 V)


50 MOhm
50 MOhm
50 MOhm

Input current: At full load 1.8 A RMS at 220 V 50 Hz Fuse 2.5 A slow blow
 3.4 A RMS at 110 V 50 Hz Fuse 5.0 A slow blow





Weight: 2,75 Kg.


Dimensions: Europa cassette 38 TE width, 194,5 x 106 x 166 mm (W x H x D).
 Separate 40 TE front panel available.

Mounting: Horizontal in order to allow a vertical air flow through the unit;
 a requirement for natural convection cooling.

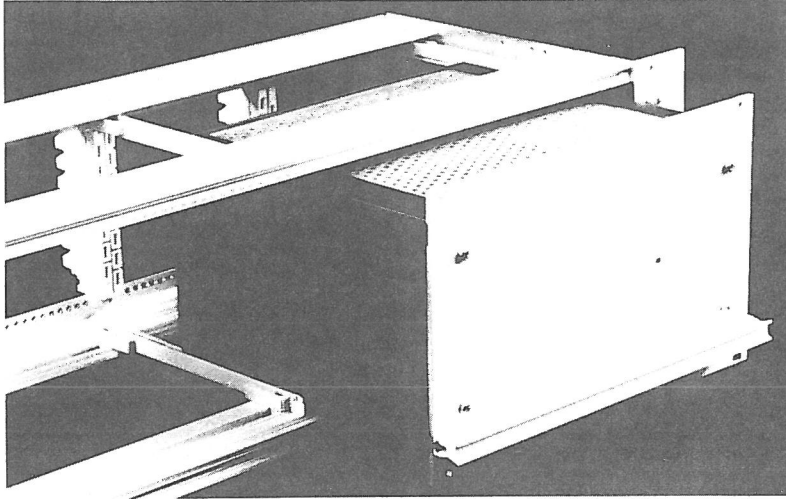

The 240 W S-series fits into a 19" Europa card rack. The width is 38 TE. A 40 TE front panel can be ordered separately.

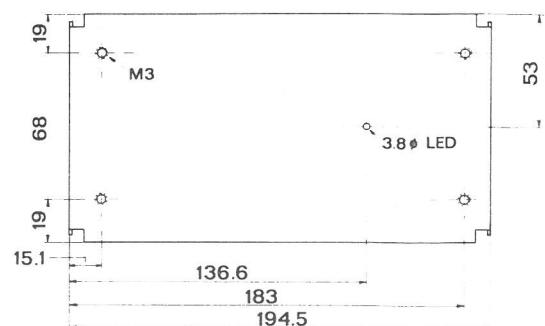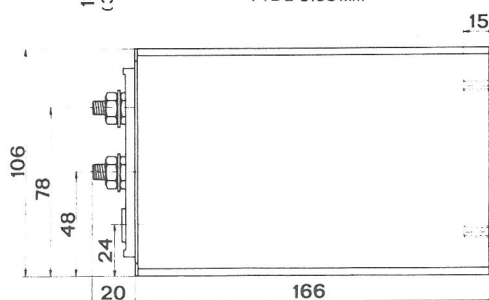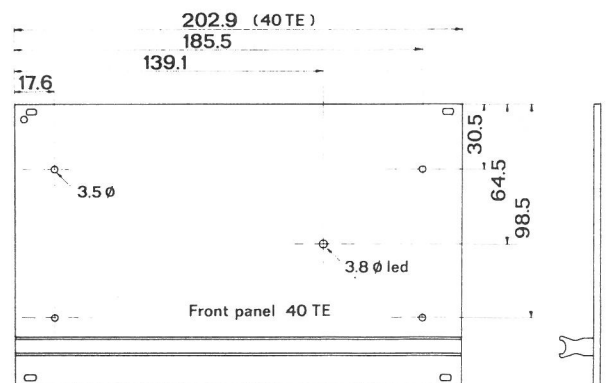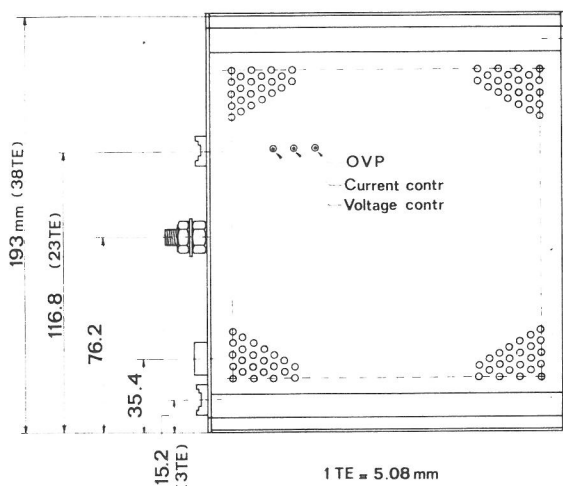

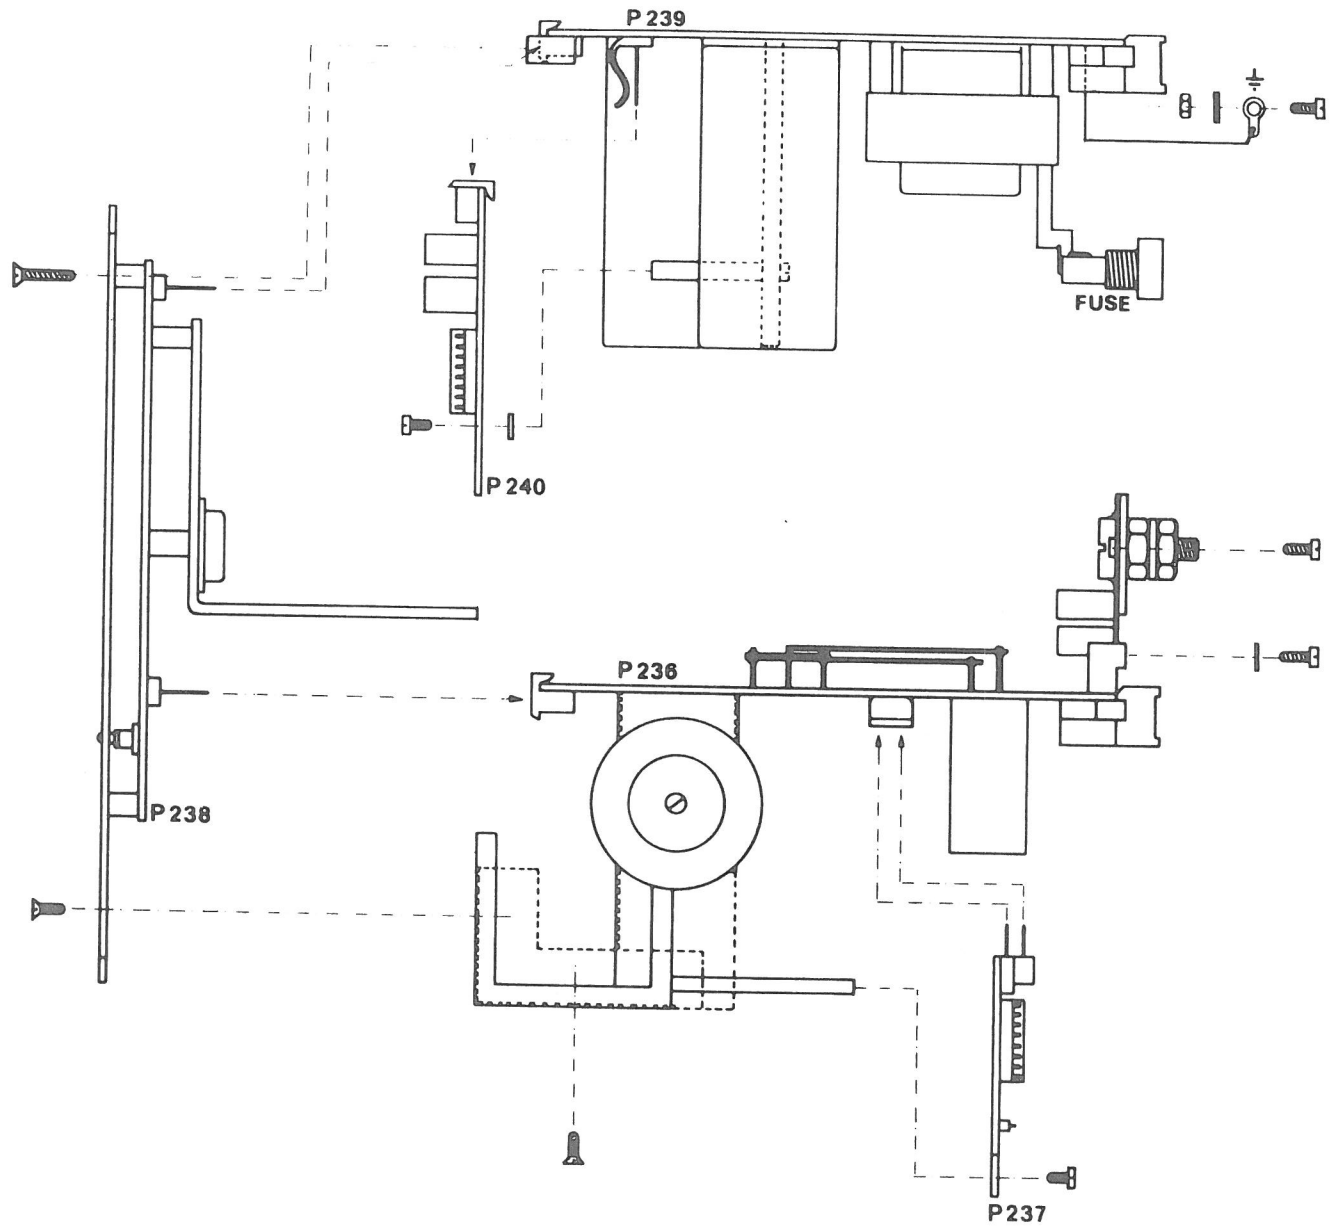

			Title: assembly diagram
			S 5-40, S 15-15, S 24-10
			Date: 2-'80
Modifications	Date	App	delta elektronika bv



S 5-40

S 15-15

S 24-10

R = Ohm

1 =	47	7 W WW	47	7 W WW	47	7 W WW
2 =	390		390		390	
3 =	270		270		270	
4 =	270		270		270	
5 =	4,7		4,7		4,7	
6 =	22		22		22	
7 =	1,2 k	10 W WW	1,2 k	10 W WW	1,2 k	10 W WW
8 =	8,2		3,9		3 x 100	PR 37
9 =	560		560		560	
10 =	CR		CR		CR	
11 =	330		330		330	
12 =	10 k	potm. 20 trn.	10 k	potm. 20 trn.	10 k	potm. 20 trn.
13 =	470		470		470	
14 =	0,00075		0,002		0,003	
15 =	1 k	potm. 20 trn.	1 k	potm. 20 trn.	1 k	potm. 20 trn.
16 =	1 k		1 k		1 k	
17 =	330		330		330	
18 =	100		1 k		3,3 k	
19 =	330		330		330	
20 =	68 k		68 k		68 k	
21 =	56 k		56 k		56 k	
22 =	CR		CR		CR	
23 =	1 k		1 k		1 k	
24 =	560 k		560 k		560 k	
25 =	270 k		270 k		270 k	
26 =	82 k	0,7 W	82 k	0,7 W	82 k	0,7 W
27 =	82 k	0,7 W	82 k	0,7 W	82 k	0,7 W
28 =	-		-		-	
29 =	680		680		680	
30 =	12 k		12 k		12 k	
31 =	68 k		68 k		68 k	
32 =	15 k		15 k		15 k	
33 =	1 k		1 k		1 k	
34 =	1,8 k		1,8 k		1,8 k	
35 =	3,3 k		3,3 k		3,3 k	
36 =	39		39		39	
37 =	10 k		10 k		10 k	
38 =	-		-		-	
39 =	-		-		-	
40 =	10		10		10	
41 =	6,8 k		6,8 k		6,8 k	
42 =	CR		CR		CR	
43 =	CR		CR		CR	
44 =	22 k		22 k		22 k	
45 =	33 k		33 k		33 k	
46 =	1 k		1 k		1 k	
47 =	1 k		1 k		1 k	
48 =	1,8 k		1,8 k		1,8 k	
49 =	100 k		100 k		100 k	
50 =	1 k		1 k		1 k	
51A =	150 k		150 k		150 k	
52A =	150 k		150 k		150 k	

			Title: Part list
RS (S24-10)	6-'85	Vr	Date: 6-'80
Modifications	Date	App	delta elektronika bv



S 5-40

S 15-15

S 24-10

R = Ohm

51 =	1	k			1	k			1	k	
52 =	12	k			12	k			12	k	
53 =	180	k			270	k			270	k	
54 =	CR				CR				CR		
55 =	2,7	k			8,2	k			12	k	
56 =	1	k			1	k			1	k	
57 =	1	k			1	k			1	k	
58 =	15	k			4,7	k			3,3	k	
59 =	82	k			27	k			56	k	
60 =	4,7	k			4,7	k			4,7	k	
61 =	680				680				680		
62 =	2,7	k			2,7	k			2,7	k	
63 =	150				150				150		
64 =	5	k	potm. 20 trn.		5	k	potm. 20 trn.		5	k	potm. 20 t
65 =	1	k			1	k			1	k	
66 =	4,7				4,7				4,7		
67 =	CR				CR				CR		
68 =	CR				CR				CR		
69 =	10	k			10	k			10	k	
70 =	1,2	k	10 W WW		1,2	k	10 W WW		1,2	k	10 W WW
71 =	12				-				-		
72 =	100				100				100		
73 =	2,2	k			2,2	k			2,2	k	
74 =	CR				CR				CR		
75 =	2,2	k			2,2	k			2,2	k	

CR = Calibration resistor

WW = wire wound

all other resistors 0,4W 2% metal film

<u>T</u> 1 =	BUX 48 A	BUX 48 A	BUX 48 A	Sescose
2 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescose
3 =	2 N 3053	2 N 3053	2 N 3053	RCA
4 =	BUX 86	BUX 86	BUX 86	Philips
5 =	2 N 2222 A	2 N 2222 A	2 N 2222 A	Sescose
6 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescose
7 =	BS 250	BS 250	BS 250	J.M.
8 =	VN 66 AF	VN 66 AF	VN 66 AF	Silicon
9 =	VN 66 AF	VN 66 AF	VN 66 AF	Silicon
10 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescose
11 =	2 N 2222 A	2 N 2222 A	2 N 2222 A	Sescose
12 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescose
13 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescose

IC

1 =	HEF 4049 BP	HEF 4049 BP	HEF 4049 BP	Philips
2 =	HEF 4049 BP	HEF 4049 BP	HEF 4049 BP	Philips
3 =	SFC 2747 M	SFC 2747 M	SFC 2747 M	Sescose

			Title: Part list
R74 = CR	7-'85	Vr	Date: 6-'80

S 5-40

S 15-15

S 24-10

C											
1 =	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X		
2 =	4,7	nF	250 V ~ Y	4,7	nF	250 V ~ Y	4,7	nF	250 V ~ Y		
3 =	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X		
4 =	4,7	nF	250 V ~ Y	4,7	nF	250 V ~ Y	4,7	nF	250 V ~ Y		
5 =	800	µF	200 V -	800	µF	200 V -	800	µF	200 V -		
6 =	800	µF	200 V -	800	µF	200 V -	800	µF	200 V -		
7 =	0,1	µF	400 V -	0,1	µF	400 V -	0,1	µF	400 V -		
8 =	1	µF	250 V -	1	µF	250 V -	1	µF	250 V -		
9 =	4,7	µF	63 V -	4,7	µF	63 V -	4,7	µF	63 V -		
10 =	1,8	nF	2000 V -	1,8	nF	2000 V -	1,8	nF	2000 V -		
11 =	10	nF	500 V -	10	nF	500 V -	3300	pF	1000 V -		
12 =	10	nF	250 V -	10	nF	250 V -	10	nF	250 V -		
13 =	4700	µF	16 V -	2200	µF	40 V -	1000	µF	63 V -		
14 =	4700	µF	16 V -	2200	µF	40 V -	1000	µF	63 V -		
15 =	15	µF	16 V -	15	µF	16 V -	15	µF	16 V -		
16 =	15	µF	16 V -	15	µF	16 V -	15	µF	16 V -		
17 =	0,22	µF	63 V -	0,22	µF	63 V -	0,22	µF	63 V -		
18 =	4700	µF	16 V -	2200	µF	40 V -	1000	µF	63 V -		
19 =	0,22	µF	63 V -	0,22	µF	63 V -	0,22	µF	63 V -		
20 =	15	µF	16 V -	15	µF	16 V -	15	µF	16 V -		
21 =	15	µF	16 V -	15	µF	16 V -	15	µF	16 V -		
22 =	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X		
23 =	1	µF	63 V -	1	µF	63 V -	1	µF	63 V -		
24 =	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X	0,22	µF	250 V ~ X		
25 =	0,22	µF	63 V -	0,22	µF	63 V -	0,22	µF	63 V -		
26 =	0,1	µF	400 V -	0,1	µF	400 V -	0,1	µF	400 V -		
27 =	15	pF	500 V -	15	pF	500 V -	15	pF	500 V -		
28 =	150	pF	630 V -	150	pF	630 V -	150	pF	630 V -		
29 =	470	pF	160 V -	470	pF	160 V -	470	pF	160 V -		
30 =	100	µF	10 V -	100	µF	10 V -	100	µF	10 V -		
31 =	10	nF	250 V -	10	nF	250 V -	10	nF	250 V -		
32 =	150	pF	1600 V -	150	pF	1600 V -	150	pF	1600 V -		
33 =	47	µF	40 V -	47	µF	40 V -	47	µF	40 V -		
34 =	15	µF	16 V -	15	µF	16 V -	15	µF	16 V -		
35 =	1	nF	630 V -	1	nF	630 V -	1	nF	630 V -		
36 =	470	pF	630 V -	470	pF	630 V -	470	pF	630 V -		
37 =	22	nF	250 V -	22	nF	250 V -	22	nF	250 V -		
38 =	10	nF	250 V -	10	nF	250 V -	10	nF	250 V -		
39 =	470	pF	160 V -	470	pF	160 V -	470	pF	160 V -		
40 =	22	nF	250 V -	22	nF	250 V -	22	nF	250 V -		
41 =	470	pF	160 V -	470	pF	160 V -	470	pF	160 V -		
42 =	470	pF	160 V -	470	pF	160 V -	470	pF	160 V -		
43 =	10	nF	250 V -	10	nF	250 V -	10	nF	250 V -		
44 =	470	pF	160 V -	470	pF	160 V -	470	pF	160 V -		
45 =	470	pF	160 V -	470	pF	160 V -	470	pF	160 V -		
46 =	47	nF	250 V -	47	nF	250 V -	47	nF	250 V -		
47 =	2,2	µF	16 V -	2,2	µF	16 V -	2,2	µF	16 V -		
48 =	2,2	µF	16 V -	2,2	µF	16 V -	2,2	µF	16 V -		
49 =	4,7	µF	63 V -	4,7	µF	63 V -	4,7	µF	63 V -		
50 =	4,7	µF	63 V -	4,7	µF	63 V -	4,7	µF	63 V -		

		Title: Part list	
2:6, C 1a			
CC 11, S 21, 55, 5)	6-85	Vr	Date: 6-'80
Modifications	Date	App.	delta elektronika bv



S 5-40

S 15-15

S 24-10

C

51 =	68	nF	250 V ~	68	nF	250 V ~	68	nF	250 V ~
52 =	2,2	μF	16 V -	2,2	μF	16 V -	2,2	μF	16 V -
53 =	2,2	μF	16 V -	2,2	μF	16 V -	2,2	μF	16 V -
54 =	2,2	nF	500 V -	—			—		
55 =	100	pF	500 V -	100	pF	500 V -	100	pF	500 V -
56 =	10	nF	50 V -	10	nF	50 V -	10	nF	50 V -
57 =	470	pF	500 V -	470	pF	500 V -	470	pF	500 V -
58 =	470	pF	500 V -	470	pF	500 V -	470	pF	500 V -

S 75	=	prim. choke	delta
L 115	=	sec. choke 10 A	delta
L 116	=	sec. choke 15 A	delta
L 117	=	sec. choke 40 A	delta
T 120	=	aux. supply transformer	delta
T 124	=	curr. transformer	delta
L 126	=	sec. RFI inductance 5 V	delta
L 127	=	sec. RFI inductance 15 V, 24 V	delta
T 129	=	transformer 5 V	delta
T 130	=	transformer 15 V	delta
T 131	=	transformer 24 V	delta
L 132	=	saturable inductance	delta
L 134	=	prim. RFI inductance B 82724-G2-A013	Siemens
L 135	=	switch-off inductance 15 μH 22-26	secre
T 136	=	driver transformer	delta
L 228	=	saturable inductance	delta

			Title: Part list
L 228 (S24-10)	6-'85	Ur	S5-40, S15-15, S24-10
C57, 58	2-'85	Ur	Date: 6-'80
Modifications	Date	App	delta elektronika

S 5-40S 15-15S 24-10R = Ohm

51 =	1 k		1 k		1 k
52 =	12 k		12 k		12 k
53 =	180 k		270 k		270 k
54 =	CR		CR		CR
55 =	2,7 k		8,2 k		12 k
56 =	1 k		1 k		1 k
57 =	1 k		1 k		1 k
58 =	15 k		4,7 k		3,3 k
59 =	82 k		27 k		56 k
60 =	4,7 k		4,7 k		4,7 k
61 =	680		680		680
62 =	2,7 k		2,7 k		2,7 k
63 =	150		150		150
64 =	5 k	potm. 20 trn.	5 k	potm. 20 trn.	5 k
65 =	1 k		1 k		1 k
66 =	4,7		4,7		4,7
67 =	CR		CR		CR
68 =	CR		CR		CR
69 =	10 k		10 k		10 k
70 =	1,2 k	10 W WW	1,2 k	10 W WW	1,2 k
71 =	12		-		-
72 =	100		100		100
73 =	2,2 k		2,2 k		2,2 k
74 =	CR		CR		CR
75 =	2,2 k		2,2 k		2,2 k

CR = Calibration resistor

WW = wire wound

all other resistors 0,4W 2% metal film

<u>T</u> 1 =	BUX 48 A	BUX 48 A	BUX 48 A	Sescosem
2 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescosem
3 =	2 N 3053	2 N 3053	2 N 3053	RCA
4 =	BUX 86	BUX 86	BUX 86	Philips
5 =	2 N 2222 A	2 N 2222 A	2 N 2222 A	Sescosem
6 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescosem
7 =	BS 250	BS 250	BS 250	J.M.
8 =	VN 66 AF	VN 66 AF	VN 66 AF	Siliconix
9 =	VN 66 AF	VN 66 AF	VN 66 AF	Siliconix
10 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescosem
11 =	2 N 2222 A	2 N 2222 A	2 N 2222 A	Sescosem
12 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescosem
13 =	2 N 2907 A	2 N 2907 A	2 N 2907 A	Sescosem

IC

1 =	HEF 4049 BP	HEF 4049 BP	HEF 4049 BP	Philips
2 =	HEF 4049 BP	HEF 4049 BP	HEF 4049 BP	Philips
3 =	SFC 2747 M	SFC 2747 M	SFC 2747 M	Sescosem

S 5-40

S 15-15

S 24-10

C

1 =	0,22	μF	250 V	~	X
2 =	4,7	nF	250 V	~	Y
3 =	0,22	μF	250 V	~	X
4 =	4,7	nF	250 V	~	Y
5 =	800	μF	200 V	-	
6 =	800	μF	200 V	-	
7 =	0,1	μF	400 V	-	
8 =	1	μF	250 V	-	
9 =	4,7	μF	63 V	-	
10 =	1,8	nF	2000 V	-	
11 =	10	nF	500 V	-	
12 =	10	nF	250 V	-	
13 =	4700	μF	16 V	-	
14 =	4700	μF	16 V	-	
15 =	15	μF	16 V	-	
16 =	15	μF	16 V	-	
17 =	0,22	μF	63 V	-	
18 =	4700	μF	16 V	-	
19 =	0,22	μF	63 V	-	
20 =	15	μF	16 V	-	
21 =	15	μF	16 V	-	
22 =	0,22	μF	250 V	~	X
23 =	1	μF	63 V	-	
24 =	0,22	μF	250 V	~	X
25 =	0,22	μF	63 V	-	
26 =	0,1	μF	400 V	-	
27 =	15	pF	500 V	-	
28 =	150	pF	630 V	-	
29 =	470	pF	160 V	-	
30 =	100	μF	10 V	-	
31 =	10	nF	250 V	-	
32 =	150	pF	1600 V	-	
33 =	47	μF	40 V	-	
34 =	15	μF	16 V	-	
35 =	1	nF	630 V	-	
36 =	470	pF	630 V	-	
37 =	22	nF	250 V	-	
38 =	10	nF	250 V	-	
39 =	470	pF	160 V	-	
40 =	22	nF	250 V	-	
41 =	470	pF	160 V	-	
42 =	470	pF	160 V	-	
43 =	10	nF	250 V	-	
44 =	470	pF	160 V	-	
45 =	470	pF	160 V	-	
46 =	47	nF	250 V	-	
47 =	2,2	μF	16 V	-	
48 =	2,2	μF	16 V	-	
49 =	4,7	μF	63 V	-	
50 =	4,7	μF	63 V	-	

0,22	μF	250 V	~	X
4,7	nF	250 V	~	Y
0,22	μF	250 V	~	X
4,7	nF	250 V	~	Y
800	μF	200 V	-	
800	μF	200 V	-	
0,1	μF	400 V	-	
1	μF	250 V	-	
4,7	μF	63 V	-	
1,8	nF	2000 V	-	
10	nF	500 V	-	
10	nF	250 V	-	
2200	μF	40 V	-	
2200	μF	40 V	-	
15	μF	16 V	-	
15	μF	16 V	-	
0,22	μF	63 V	-	
2200	μF	40 V	-	
0,22	μF	63 V	-	
15	μF	16 V	-	
15	μF	16 V	-	
0,22	μF	250 V	~	X
1	μF	63 V	-	
0,22	μF	250 V	~	X
0,22	μF	63 V	-	
0,1	μF	400 V	-	
15	pF	500 V	-	
150	pF	630 V	-	
470	pF	160 V	-	
100	μF	10 V	-	
10	nF	250 V	-	
150	pF	1600 V	-	
47	μF	40 V	-	
15	μF	16 V	-	
1	nF	630 V	-	
470	pF	630 V	-	
22	nF	250 V	-	
10	nF	250 V	-	
470	pF	160 V	-	
22	nF	250 V	-	
470	pF	160 V	-	
470	pF	160 V	-	
10	nF	250 V	-	
470	pF	160 V	-	
470	pF	160 V	-	
47	nF	250 V	-	
2,2	μF	16 V	-	
2,2	μF	16 V	-	
4,7	μF	63 V	-	
4,7	μF	63 V	-	

0,22	μF	250 V	~	X
4,7	nF	250 V	~	Y
0,22	μF	250 V	~	X
4,7	nF	250 V	~	Y
800	μF	200 V	-	
800	μF	200 V	-	
0,1	μF	400 V	-	
1	μF	250 V	-	
4,7	μF	63 V	-	
1,8	nF	2000 V	-	
3300	pF	1000 V	-	
10	nF	250 V	-	
1000	μF	63 V	-	
1000	μF	63 V	-	
15	μF	16 V	-	
15	μF	16 V	-	
0,22	μF	63 V	-	
1000	μF	63 V	-	
0,22	μF	63 V	-	
15	μF	16 V	-	
15	μF	16 V	-	
0,22	μF	250 V	~	X
1	μF	63 V	-	
0,22	μF	250 V	~	X
0,22	μF	63 V	-	
0,1	μF	400 V	-	
15	pF	500 V	-	
150	pF	630 V	-	
470	pF	160 V	-	
100	μF	10 V	-	
10	nF	250 V	-	
150	pF	1600 V	-	
47	μF	40 V	-	
15	μF	16 V	-	
1	nF	630 V	-	
470	pF	630 V	-	
22	nF	250 V	-	
10	nF	250 V	-	
470	pF	160 V	-	
22	nF	250 V	-	
470	pF	160 V	-	
470	pF	160 V	-	
10	nF	250 V	-	
470	pF	160 V	-	
470	pF	160 V	-	
47	nF	250 V	-	
2,2	μF	16 V	-	
2,2	μF	16 V	-	
4,7	μF	63 V	-	
4,7	μF	63 V	-	

S:6, C:10		Title: Part list	
CC11.521553j		6-85 Vr	Date: 6-'80
Modifications	Date	App.	delta elektronika bv



S 5-40

S 15-15

S 24-10

C

51 =	68	nF	250 V ~	68	nF	250 V ~	68	nF	250 V
52 =	2,2	μF	16 V -	2,2	μF	16 V -	2,2	μF	16 V
53 =	2,2	μF	16 V -	2,2	μF	16 V -	2,2	μF	16 V
54 =	2,2	nF	500 V -	—			—		
55 =	100	pF	500 V -	100	pF	500 V -	100	pF	500 V
56 =	10	nF	50 V -	10	nF	50 V -	10	nF	50 V
57 =	470	pF	500 V -	470	pF	500 V -	470	pF	500 V
58 =	470	pF	500 V -	470	pF	500 V -	470	pF	500 V

S 75	=	prim. choke	delta
L 115	=	sec. choke 10 A	delta
L 116	=	sec. choke 15 A	delta
L 117	=	sec. choke 40 A	delta
T 120	=	aux. supply transformer	delta
T 124	=	curr. transformer	delta
L 126	=	sec. RFI inductance 5 V	delta
L 127	=	sec. RFI inductance 15 V, 24 V	delta
T 129	=	transformer 5 V	delta
T 130	=	transformer 15 V	delta
T 131	=	transformer 24 V	delta
L 132	=	saturable inductance	delta
L 134	=	prim. RFI inductance B 82724-G2-A013	Siemens
L 135	=	switch-off inductance 15 μH 22-26	secre
T 136	=	driver transformer	delta
L 228	=	saturable inductance	delta

			Title: Part list
L 228 (S24-10)	6.85	Ur	S 5-40, S 15-15, S 24-10
C 57, 58	2.85	Ur	Date: 6-'80
Modifications	Date	App.	delta elektronika

D


) V ~
V -
V -
V -
V -
V -
V -
V -

S 5-40	S 15-15	S 24-10
1 = T 2800 D	T 2800 D	T 2800 D RCA
2 = VJ 1048	VJ 1048	VJ 1048 Varo
3 = BYV 96D	BYV 96D	BYV 96D Philips
4 = ZPY 6,2	ZPY 6,2	ZPY 6,2 ITT
5 = BYT 12 P 800	BYT 12 P 800	BYT 12 P 800 Thom.
6 = BYV 96D	BYV 96D	BYV 96D Philips
7 = BY 218-800	BY 218-800	BY 218-800 Sescosem
8 = BY 218-800	BY 218-800	BY 218-800 Sescosem
9 = VSK 51 Varo	BYW 92-150	BYW 77/180A Thom.
10 = VSK 51 Varo	BYW 92-150	BYW 77/180A Thom.
11 = 1 N 4148	1 N 4148	1 N 4148 TI
12 = -	-	-
13 = TL 431 ILP	TL 431 ILP	TL 431 ILP TI
14 = TIL 209 A	TIL 209 A	TIL 209 A TI
15 = 1 N 4148	1 N 4148	1 N 4148 TI
16 = ZPD 6,2	ZPD 6,2	ZPD 6,2 ITT
17 = 1 N 4148	1 N 4148	1 N 4148 TI
18 = BYV 96D	BYV 96D	BYV 96D Philips
19 = BYV 96D	BYV 96D	BYV 96D Philips
20 = BZV 15 C 12	BZV 15 C 12	BZV 15 C 12 Philips
21 = -	-	-
22 = BYV 96D	BYV 96D	BYV 96D Philips
23 = 1 N 4148	1 N 4148	1 N 4148 TI
24 = 1 N 4148	1 N 4148	1 N 4148 TI
25 = 1 N 4148	1 N 4148	1 N 4148 TI
26 = 1 N 4148	1 N 4148	1 N 4148 TI
27 = 1 N 4148	1 N 4148	1 N 4148 TI
28 = 1 N 4148	1 N 4148	1 N 4148 TI
29 = PO 102 BA	PO 102 BA	PO 102 BA TAG
30 = 1 N 4148	1 N 4148	1 N 4148 TI
31 = 1 N 4148	1 N 4148	1 N 4148 TI
32 = 1 N 4148	1 N 4148	1 N 4148 TI
33 = 1 N 4148	1 N 4148	1 N 4148 TI
34 = 1 N 4148	1 N 4148	1 N 4148 TI
35 = 1 N 4148	1 N 4148	1 N 4148 TI
36 = 1 N 4148	1 N 4148	1 N 4148 TI
37 = ZPD 5,6	ZPD 5,6	ZPD 5,6 ITT
38 = ZPD 6,8	ZPD 6,8	ZPD 6,8 ITT
39 = 1 N 825	1 N 825	1 N 825 IR
40 = ZPY 24	-	- ITT
41 = ZPY 24	-	- ITT
42 = ZPD 3,3	ZPD 3,3	ZPD 3,3 ITT
43 = ZPD 12	ZPD 12	ZPD 12 ITT
44 = 1 N 4148	1 N 4148	1 N 4148 TI
45 = ZPY 51	ZPY 51	ZPY 51 ITT
46 = ZPY 51	ZPY 51	ZPY 51 ITT
47 = BYV 96 D	-	- Philips
48 = BYV 96 D	-	- Philips

F 1 = fuse 2,5A (220V) 5A (110V) type EAK 5 x 20 mm
 F 2 = fuse 250 mA
 F 3 = fuse 4A (little fuse)
 TS = Thermostats OP 62 - 90 °C ± 5%

			Title: Part list
D47,48 (S5-40)	1-86	Ur	
D5	2-85	Ur	Date: 6-'80
Modifications	Date	App.	delta elektronika bv




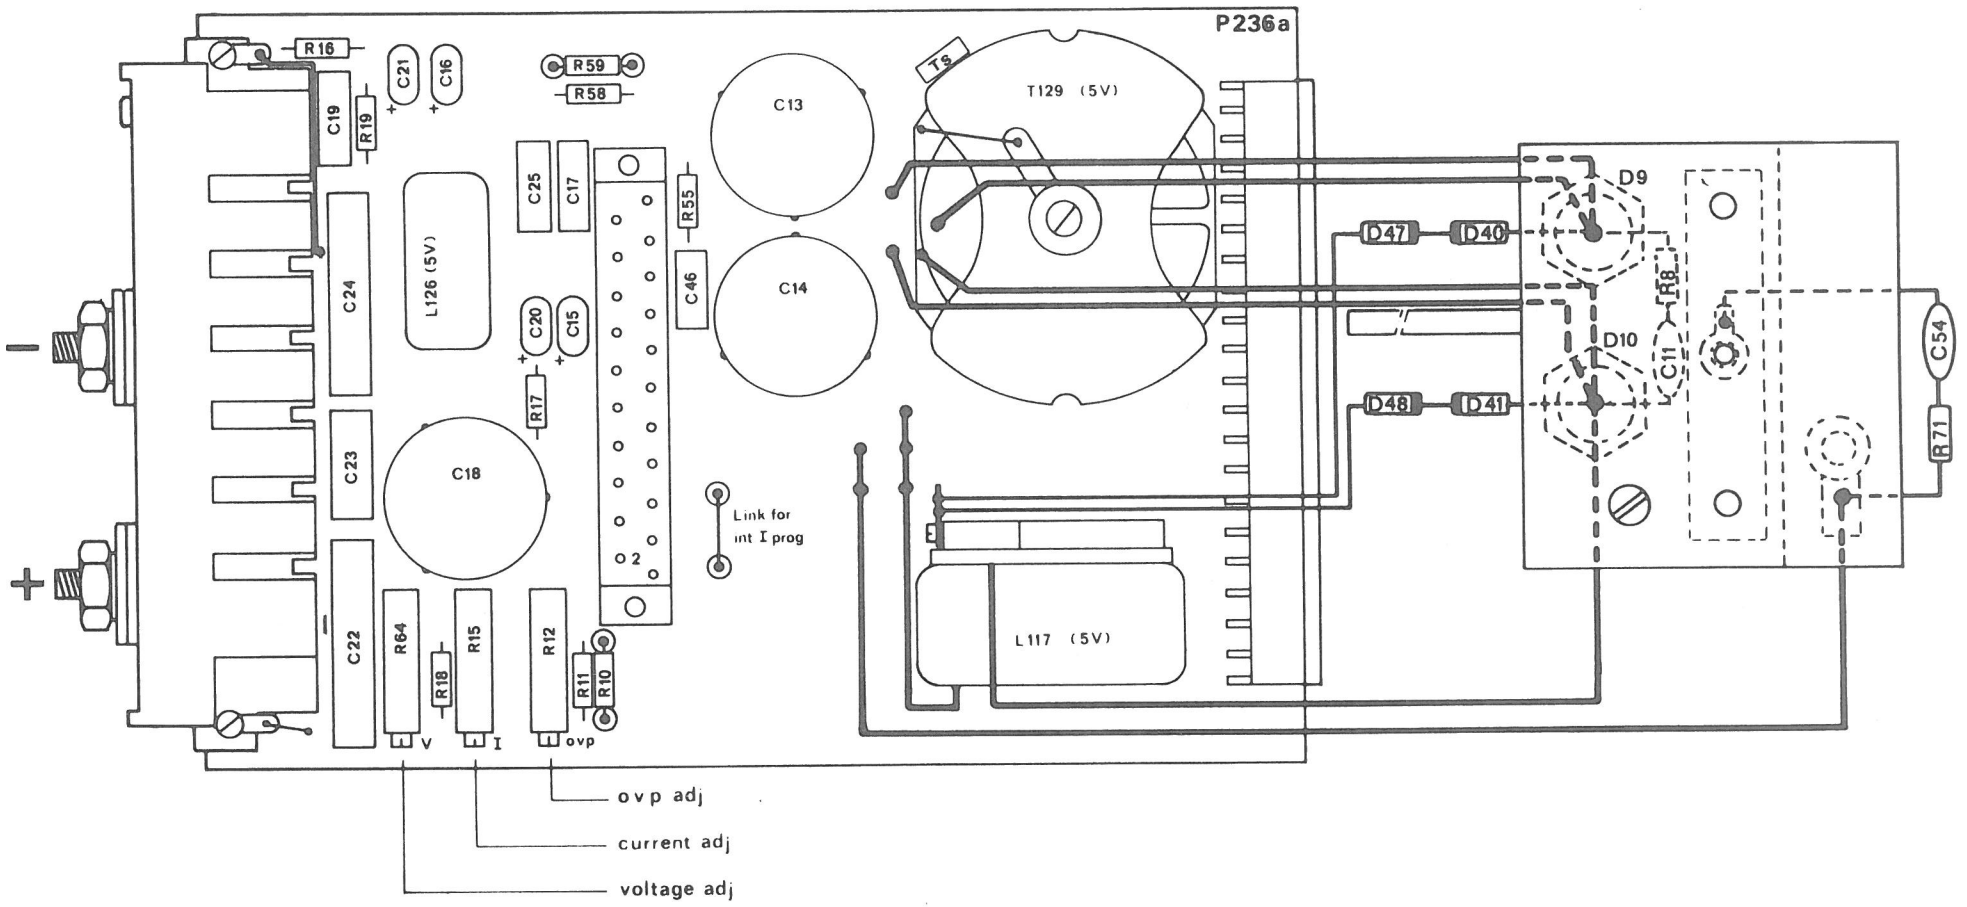

			Title: PC board
			S 5 - 40
D47, 40	1-'86	U	Date: 2 - '80




D47,48	1-'86	U _r	Date: 2 - '80
Modifications	Date	App	delta elektronika bv

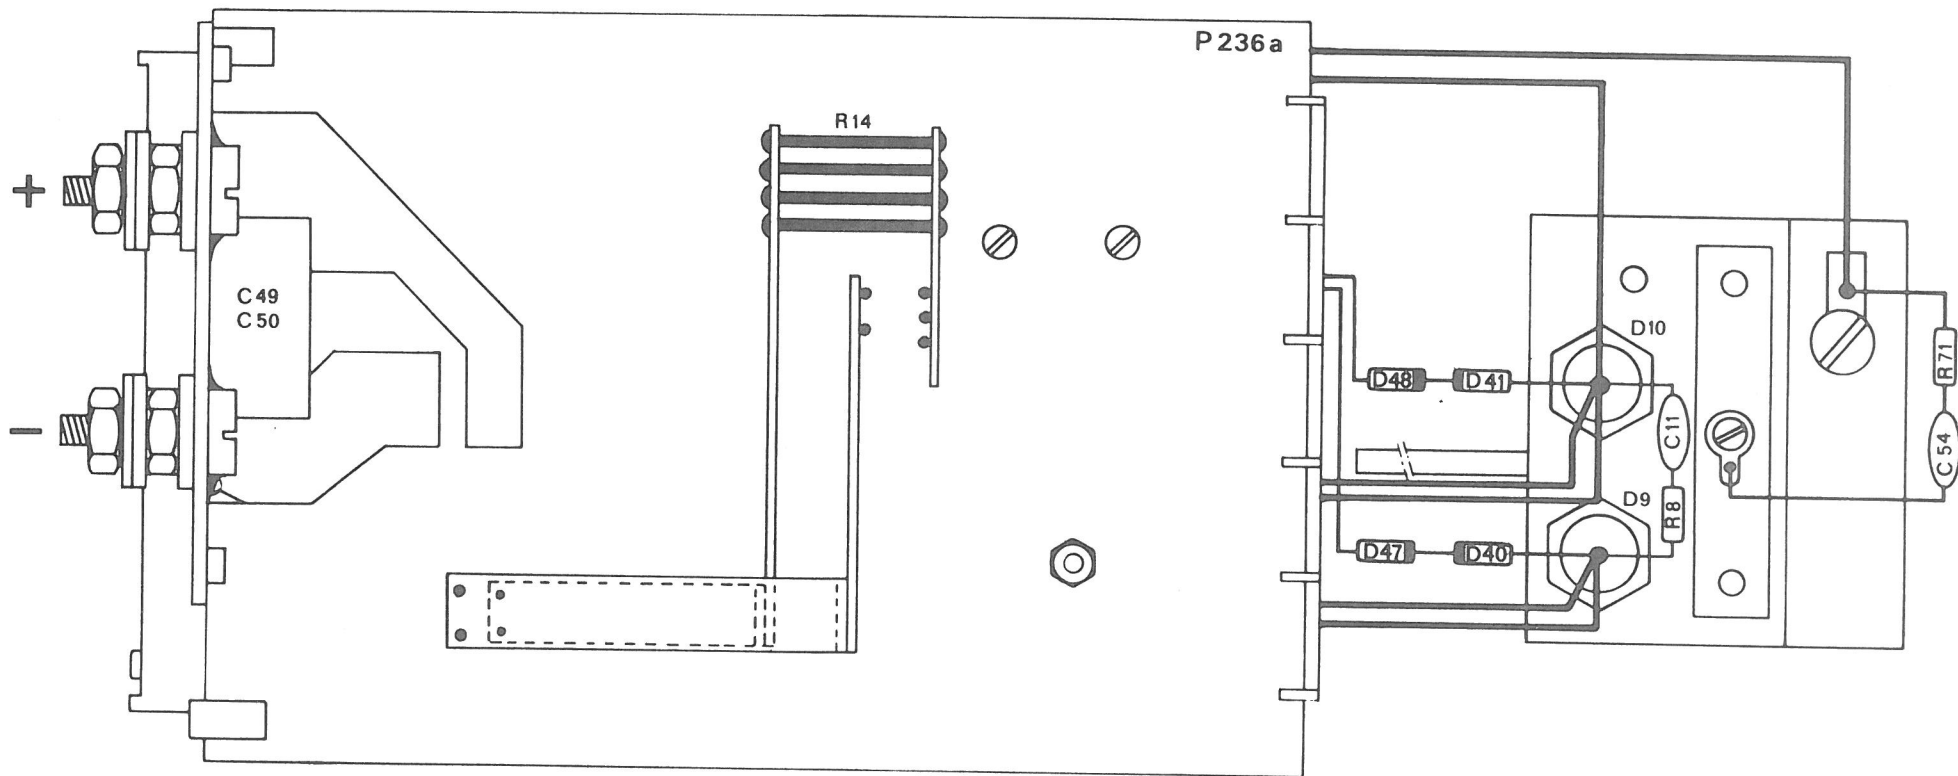


			Title: PC board S 5 - 40
D47,48	1-'86	U _r	Date: 2 - '80
Modifications	Date	App	delta elektronika bv



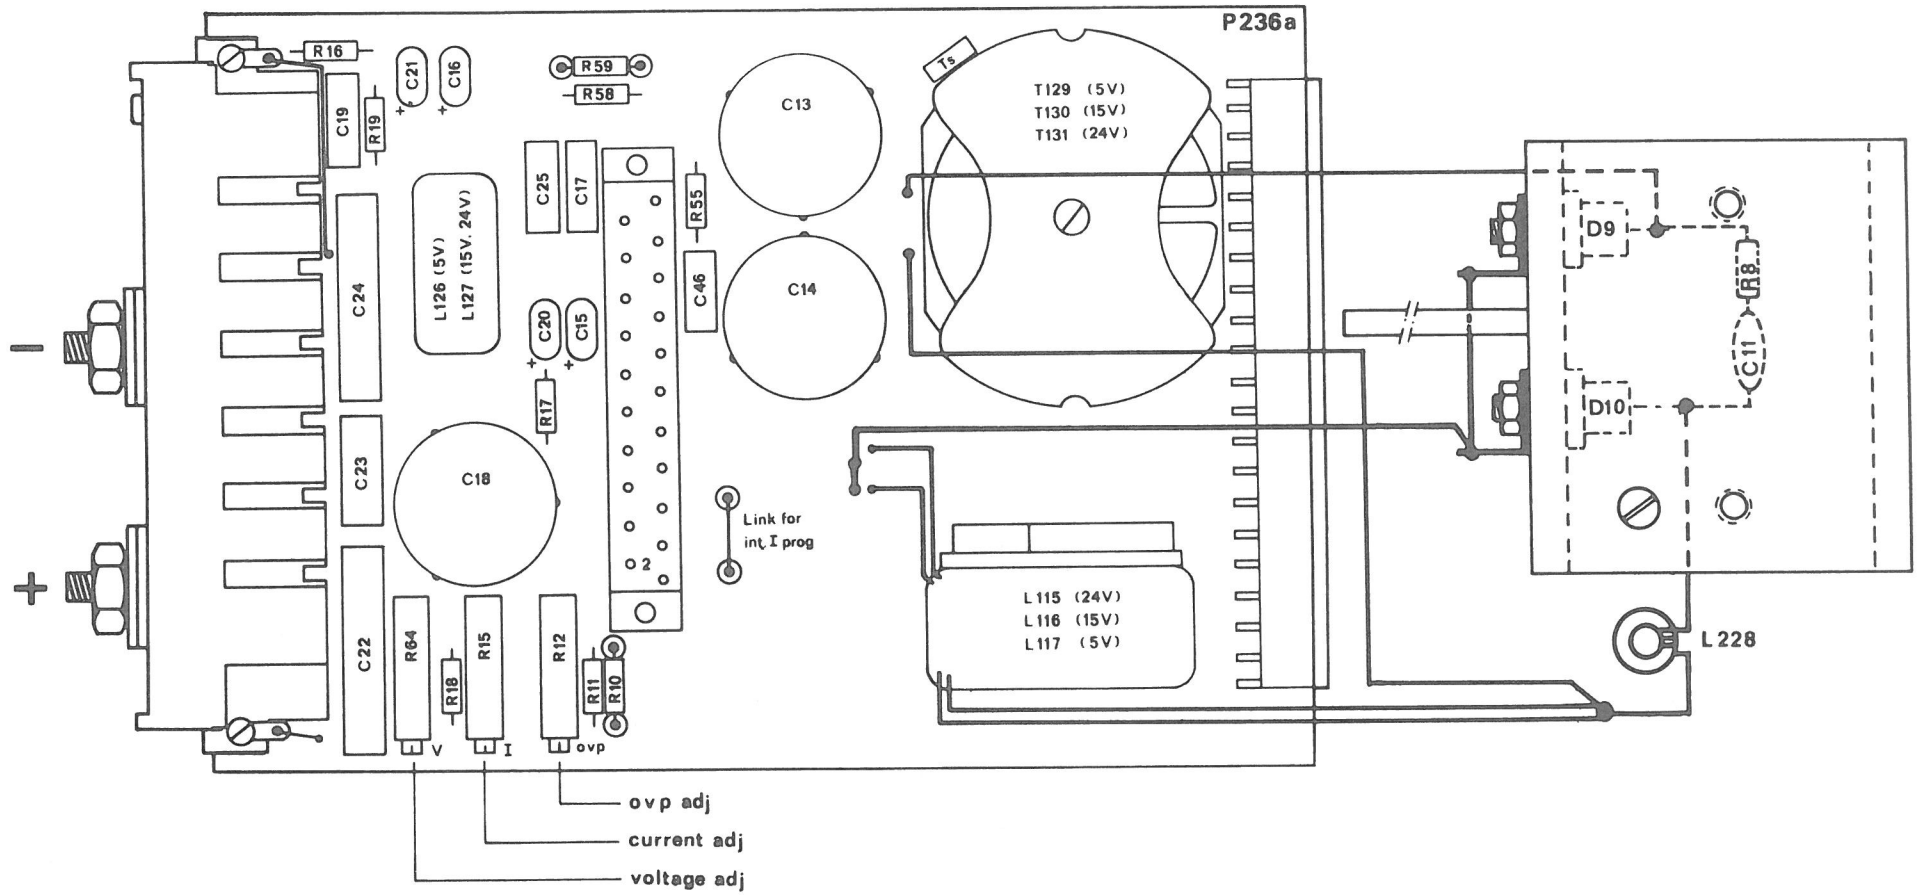


			Title: PC board
			S24 - 10
L 228	6-'85	Vr	Date: 2 -'80



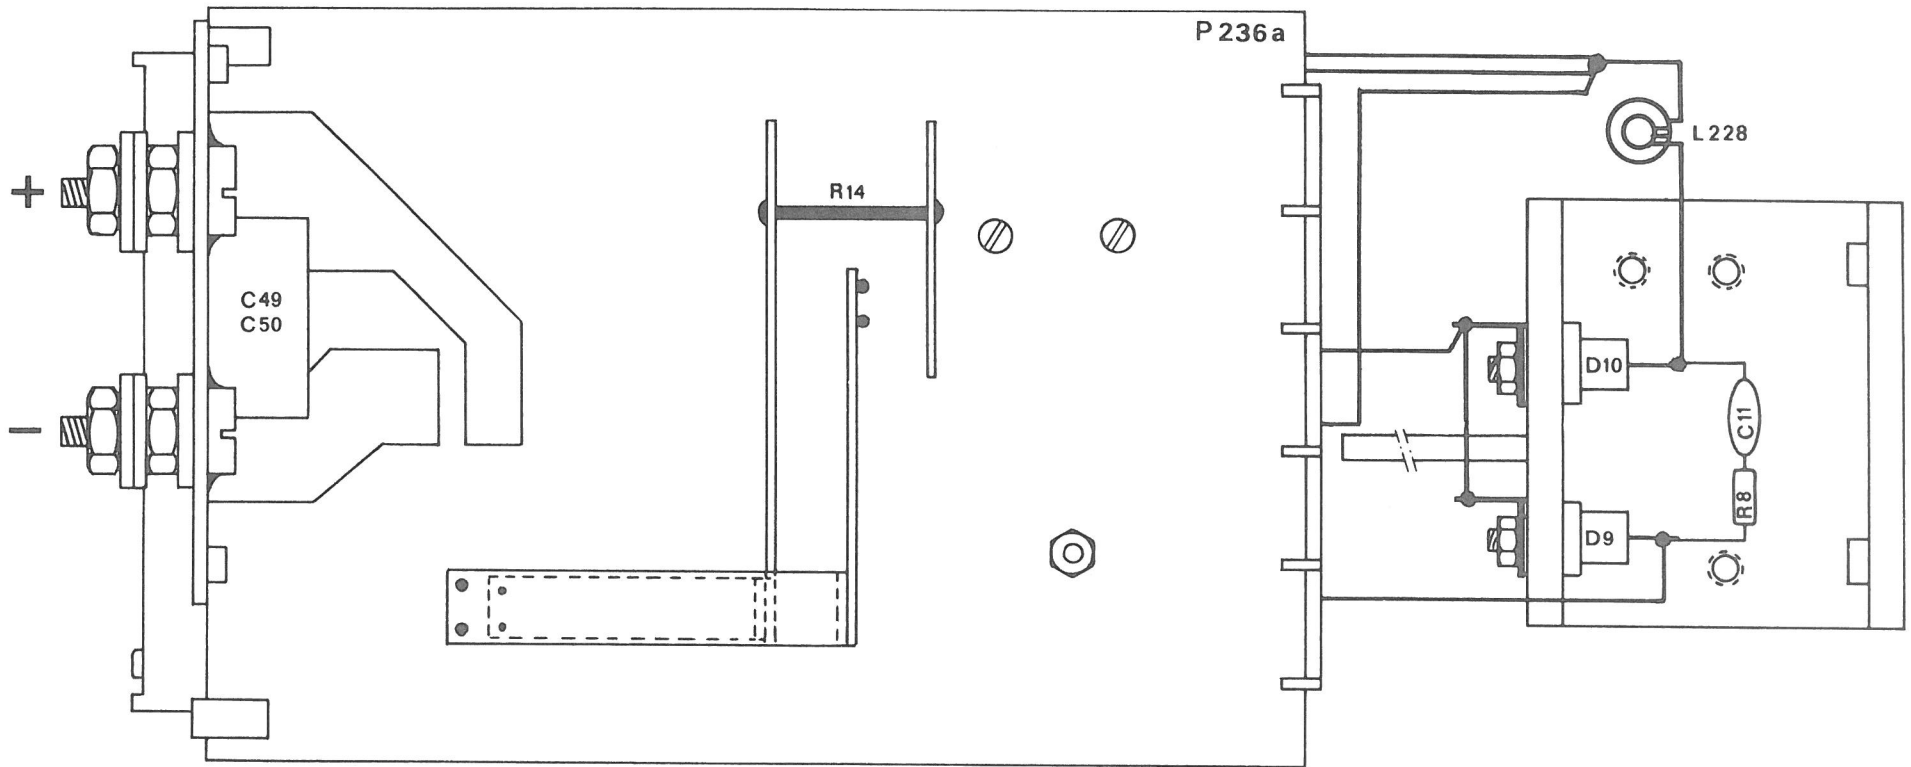

			Title: PC board
			S24 - 10
L 228	6-'85	Vr.	Date: 2 - '80
Modifications	Date	App.	delta elektronika b

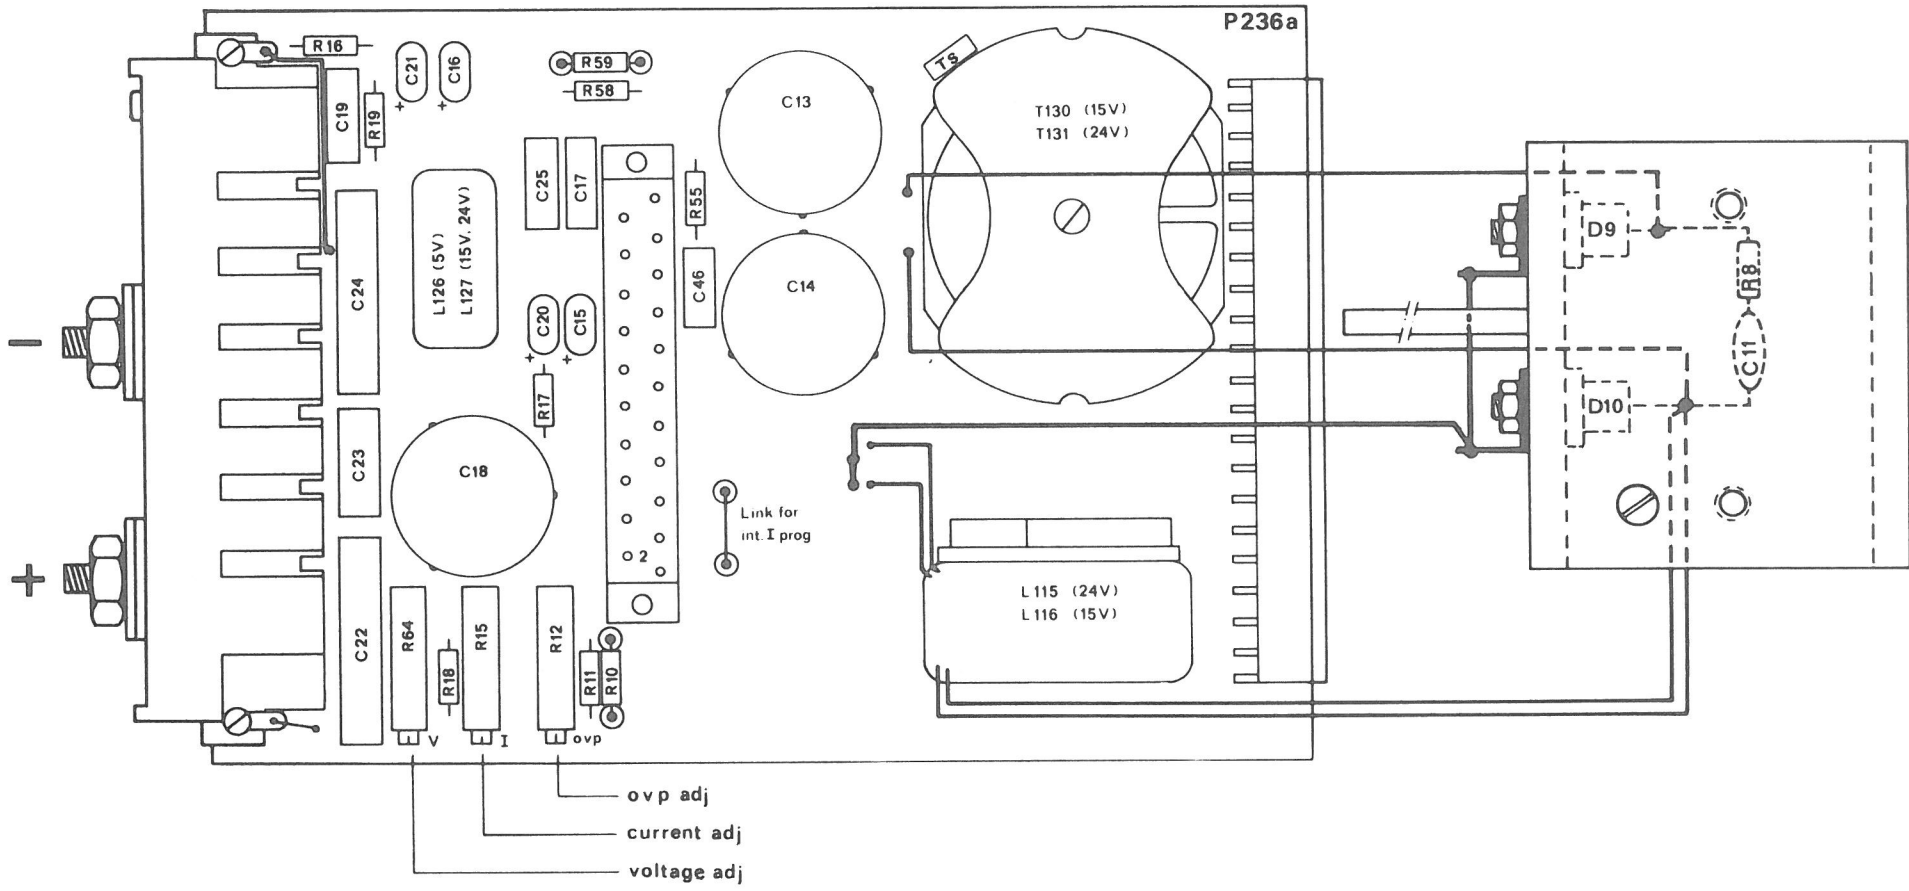

			Title: PC board
			S15 - 15
P236a	11/80	11/80	Date: 2/80



P236 a

4-'81

Vr


Date: 2-'80

Modifications



Date

App


delta elektronika bv

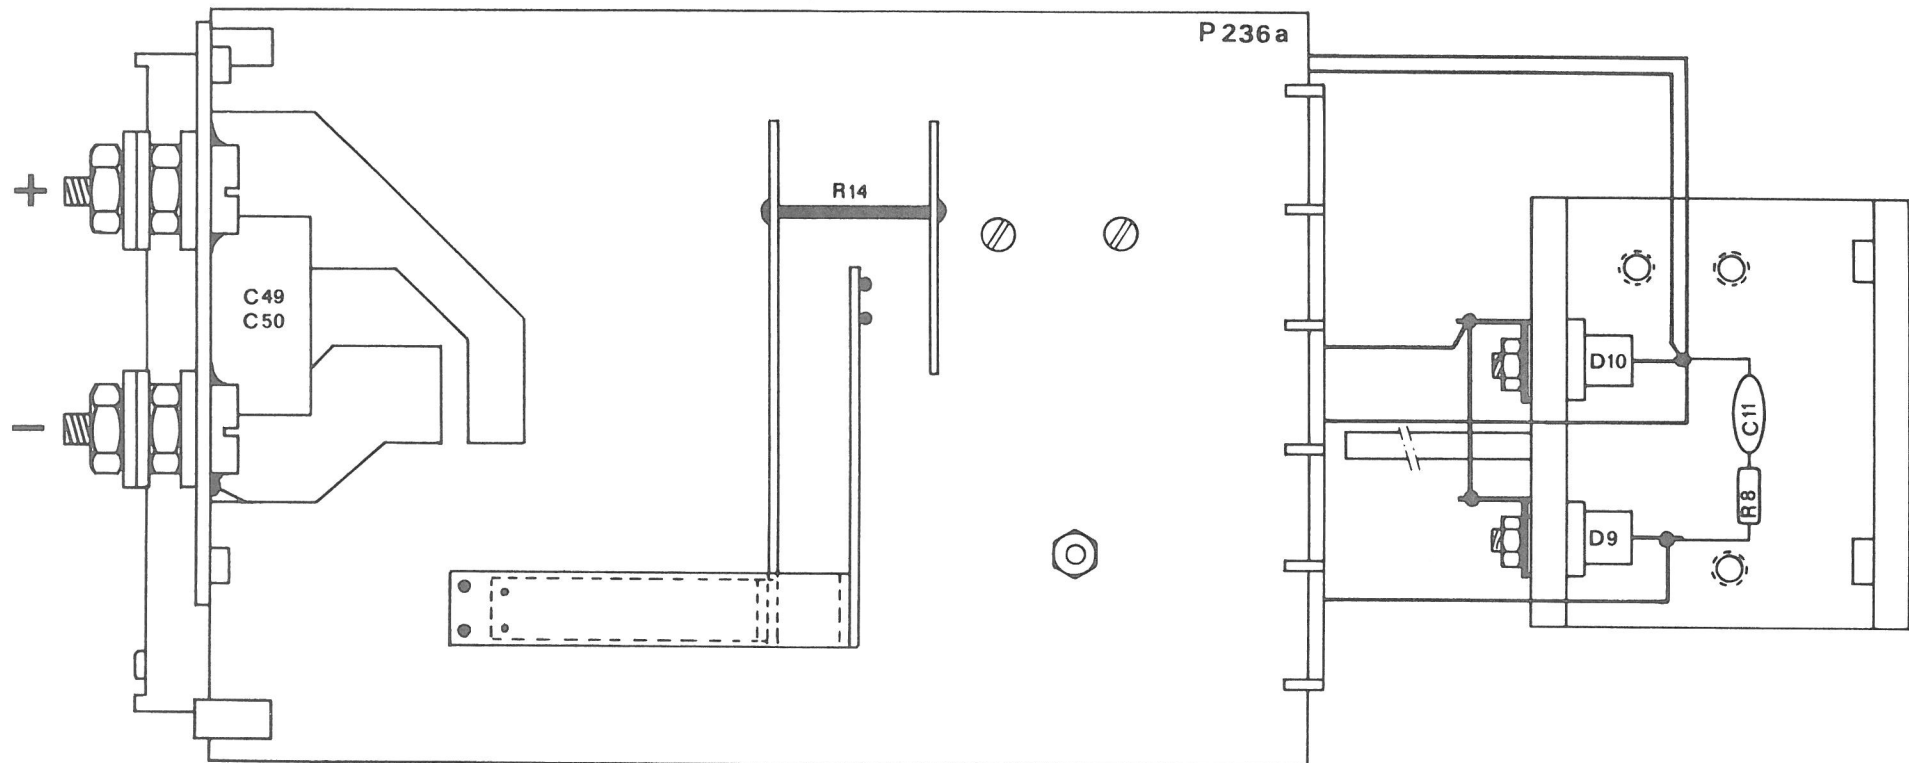

R74	1-'84	Vr	Title: PC board S15-15
R74	5-'82	Vr	
P236 a	4-'81	Vr	Date: 2-'80
Modifications	Date	App	delta elektronika bv

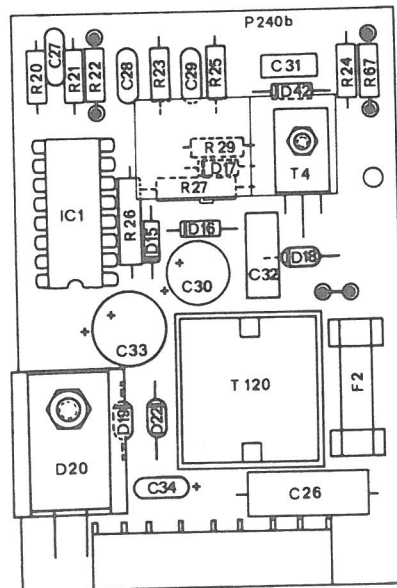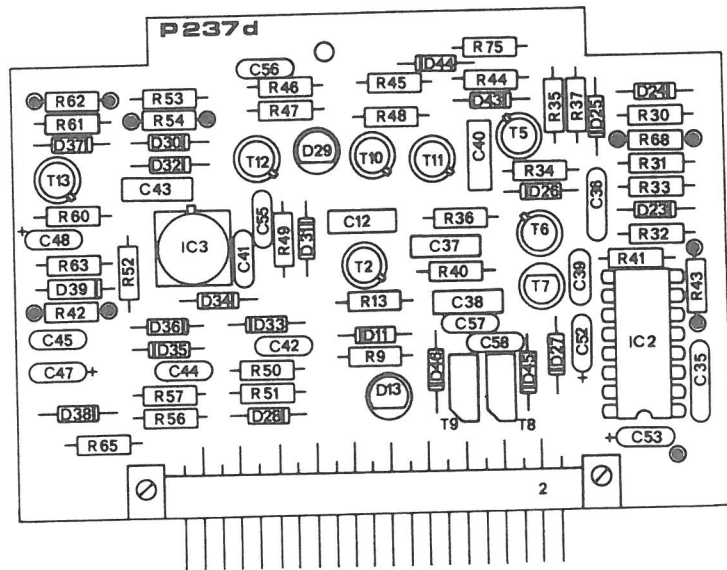


			Title: PC boards
			S5-40, S15-15, S24-10
P237d. C57,58	2'85	Vr	Date: 8-'80

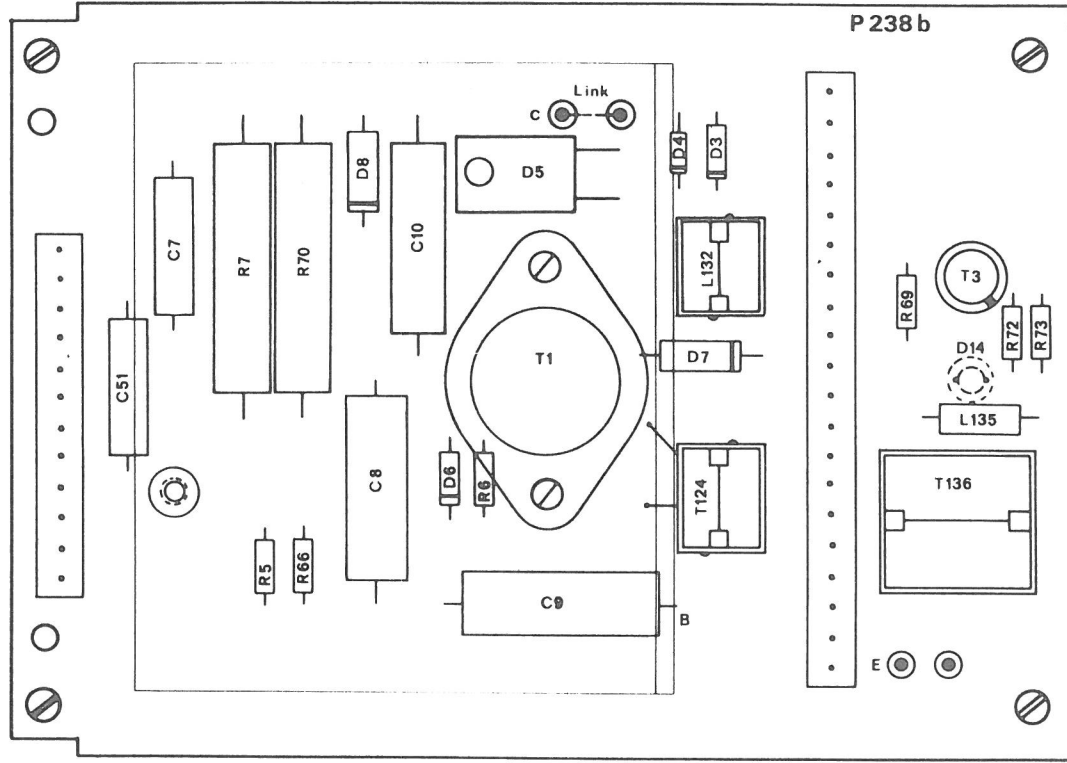


			Title: PC board
			S5-40, S15-15, S24-10
P 238 a (D5)	24.01	U	Date: 2-'80
Modifications	Date	App	delta elektronika bv



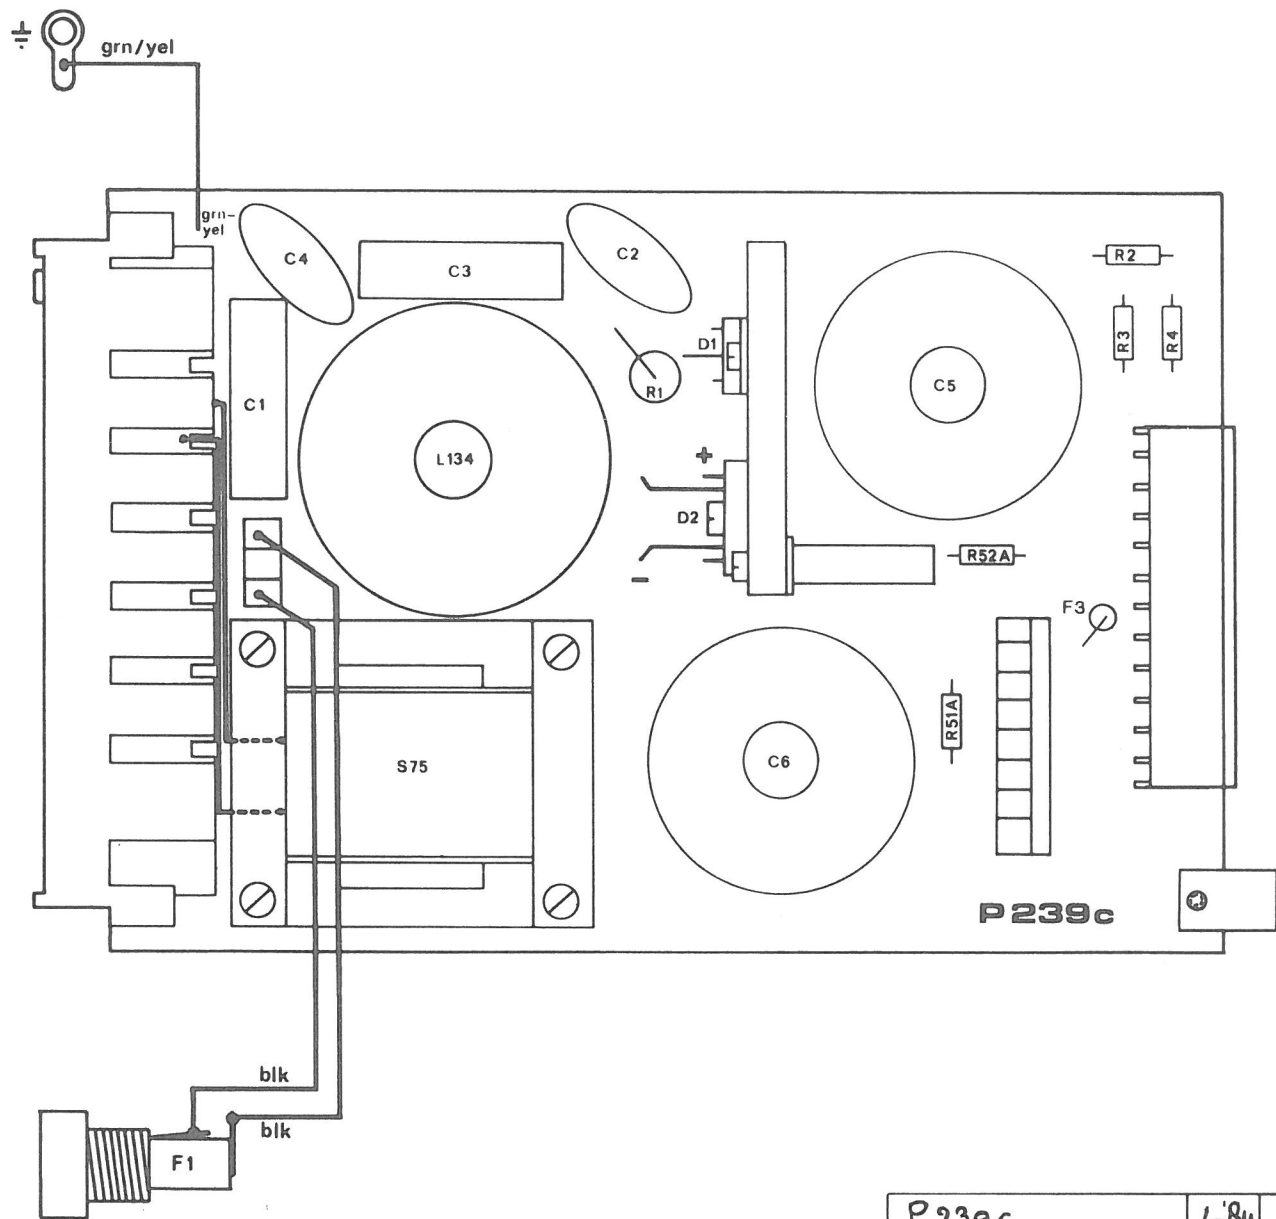




P239c	1-'84	Vr	Title: PC board
P239b	8-'83	Vr	S5-40, S15-15, S24-10
P239a	4-'81	Vr	Date: 8-'80



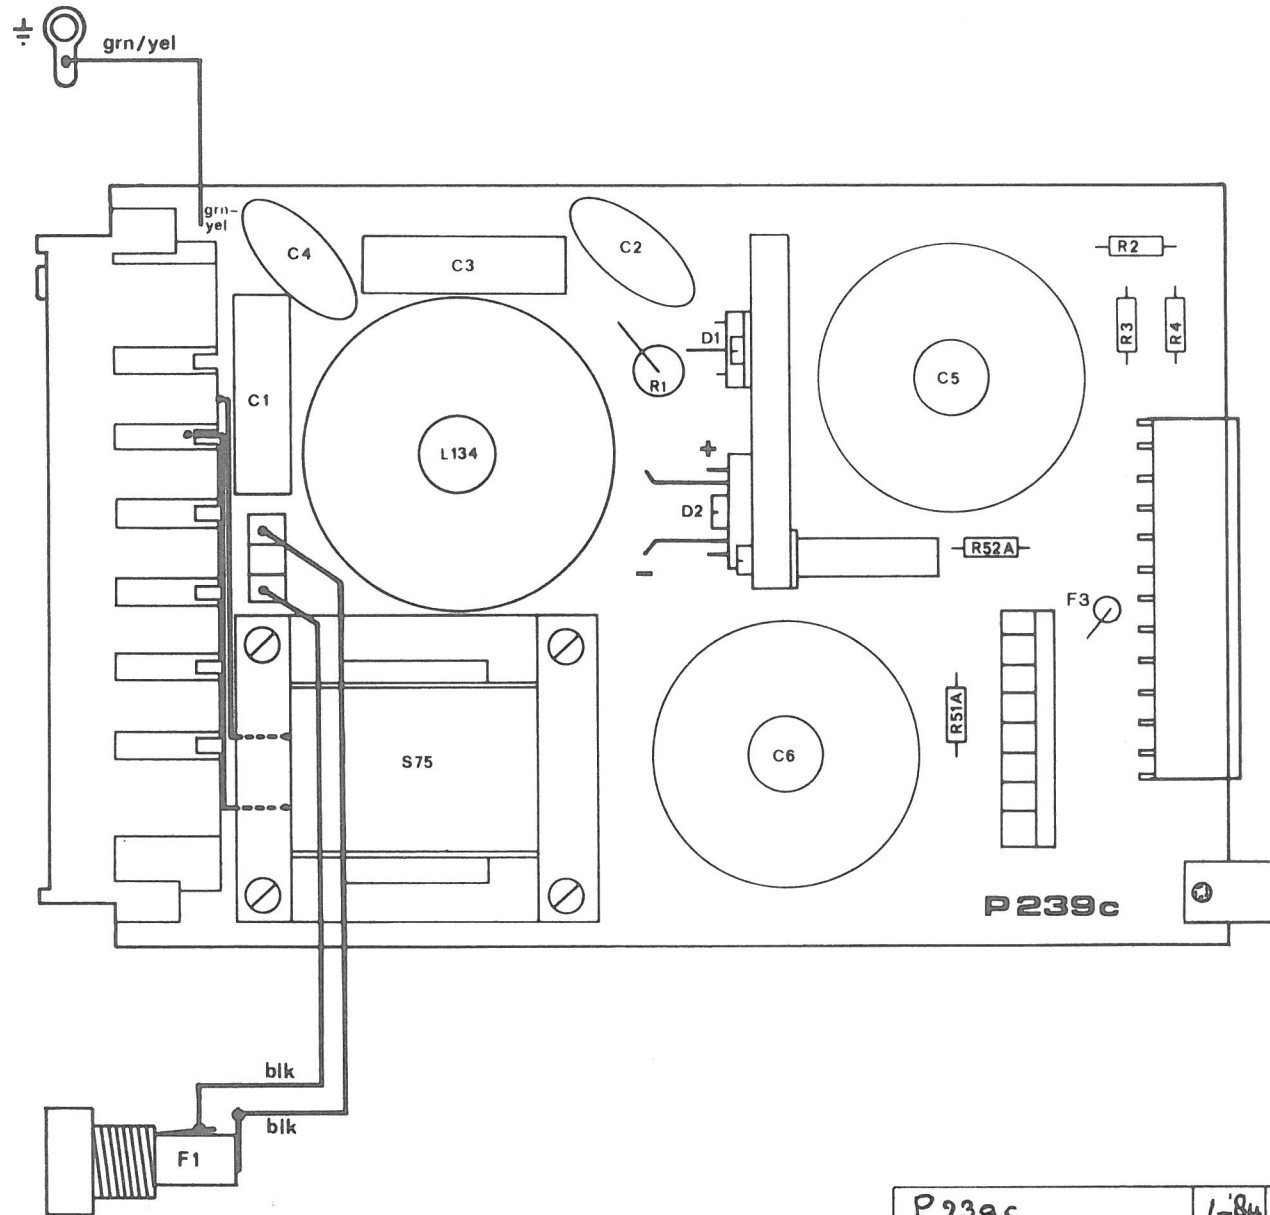

P239c	1-84	Vr	Title: PC board
P239b	8-83	Vr	S5-40, S15-15, S24-10
P239a	4-8		D 8-



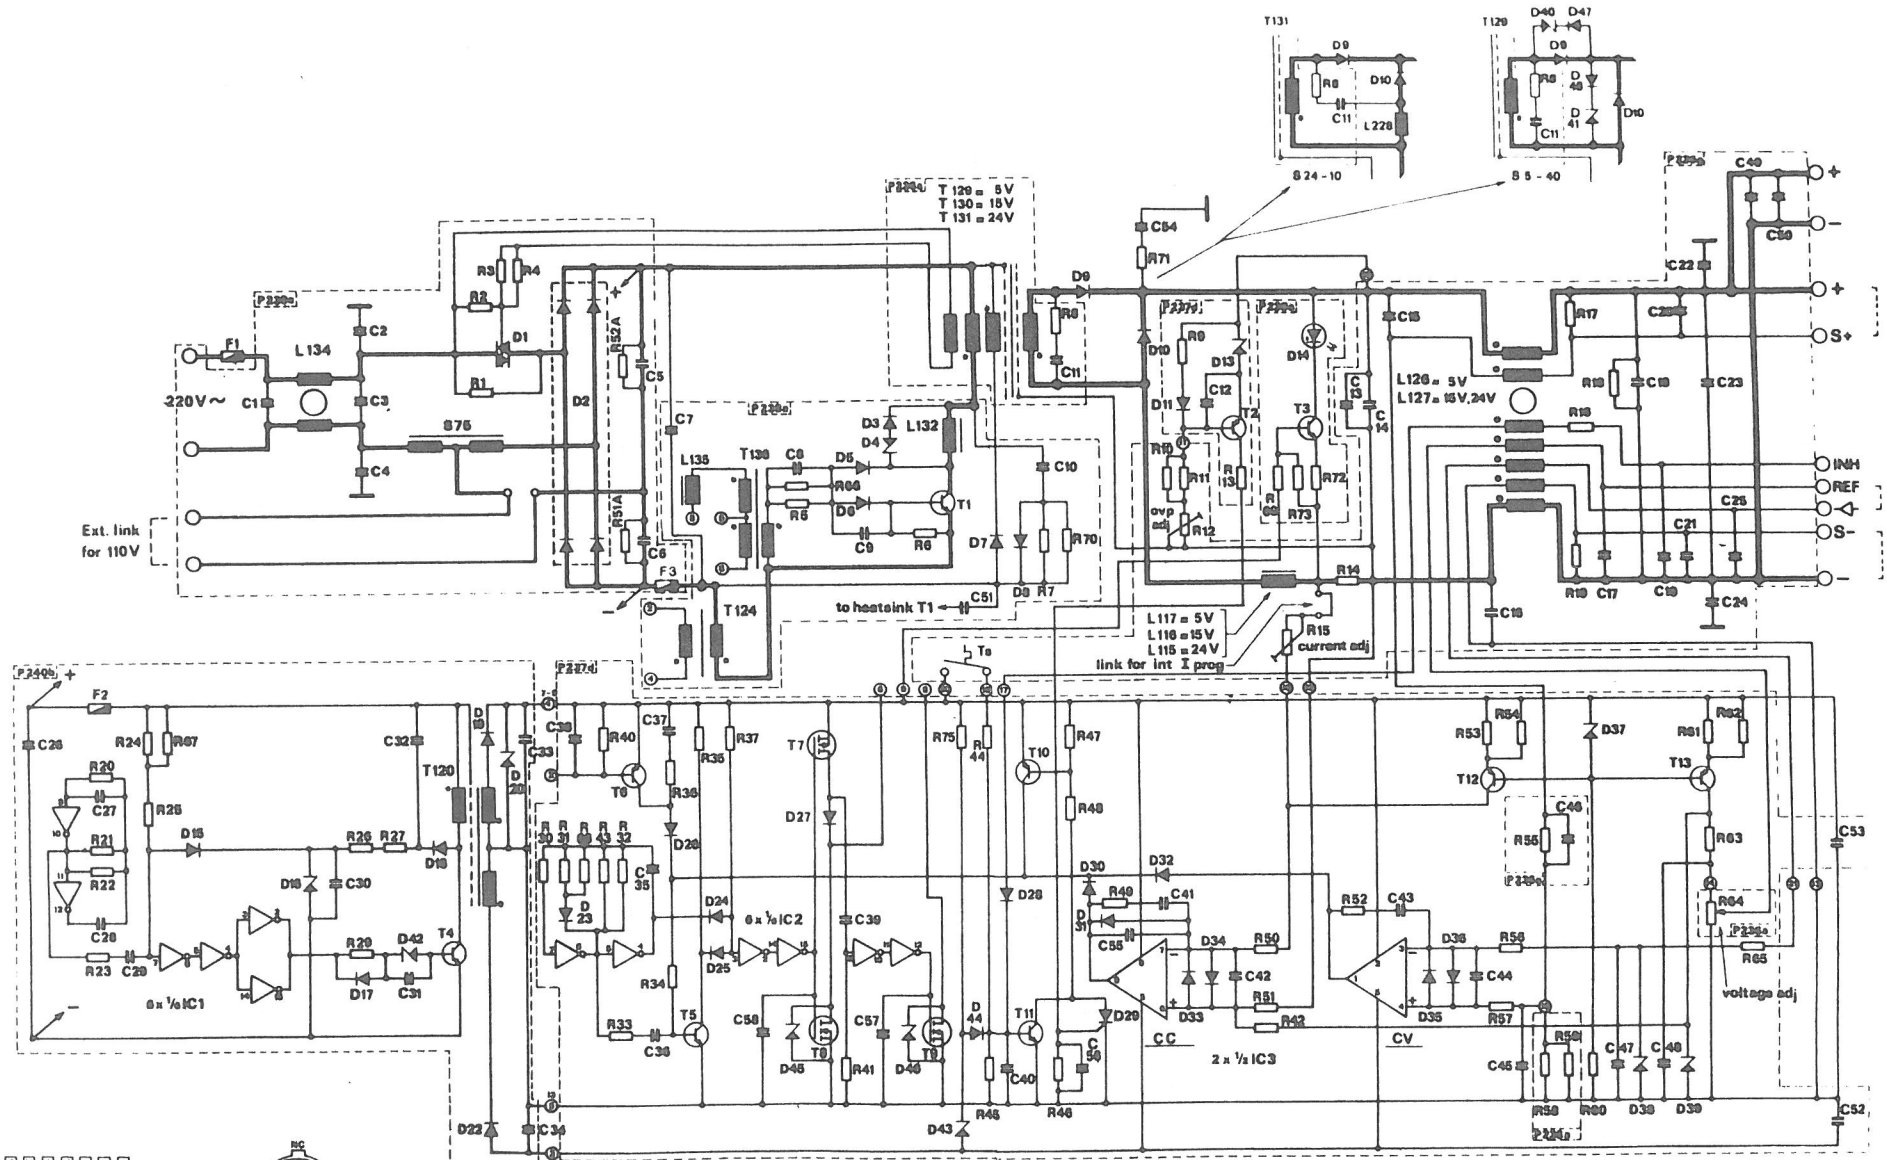

			Title: Circuit diagram
D 47.48 (S5-40)	1.86 V _r		S5-40, S15-15, S24-10
F3 (P239)	11.85 V _r		Date: 8-'80
Modifications	Date App		delta elektronik