

## Intrinsically-Safe Non-Contact AC Voltage Detector Volt-Ex 20



### For checking AC voltage in hazardous areas

- Ex d-enclosures
- Ex e-terminal boxes
- Ex e-terminals & cables

### Detection of cable breaks in hazardous areas

#### AC voltage detection:

- contactless operation
- 24V...750V AC

#### Indication:

- visual signal
- acoustic signal

#### Ex-data:

Ex designation:  
 Ⓜ II 2 G EEx ia IIC T4

EC-Certificate of Conformity:  
 PTB 01 ATEX 2019

The Volt-Ex 20 is suitable for detecting alternating voltages up to 750V without the need for direct contact with the source.


Health and Safety rules stipulate that a circuit must be isolated and potential free before work can be carried out. In hazardous areas this requirement is absolutely essential.

For example Ex d or Ex e enclosures may only be opened when it is certain that no voltage is present. To ensure that the circuit has been correctly isolated the user can simply touch the parts that could possibly carry voltage with the probe of the Volt-Ex 20. As soon as an alternating current has been detected an LED will flash and an audible tone generated.

Using the Volt-Ex 20, it is possible to detect where there are breaks in circuits in hazardous areas.

Ex d and Ex e enclosures and terminal boxes must be checked for residual voltage before opening in hazardous areas. The user checks this by touching the cable glands on the enclosures with the probe of the Volt-Ex 20.

With the help of the Volt-Ex 20 it is easy to decide whether a single lead carries voltage, whether an Ex fuse has blown or whether phase and earthing have been interchanged.

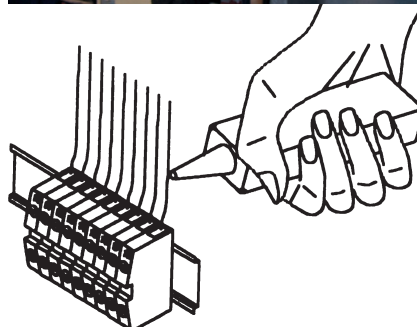

#### Technical data:

Range:	24V ... 750V AC
Operating temperature:	-4°F to +122°F (-20°C ... +50°C)
Battery type:	9V block 6LR61 as per IEC
Indication:	visual & acoustic
Dimensions:	6.7" x 1.6" x 1.2" (170 x 40 x 30 mm)
Weight:	approx. 5.3 oz (with battery)