


# SATLOOK

## Digital



Full spectrum

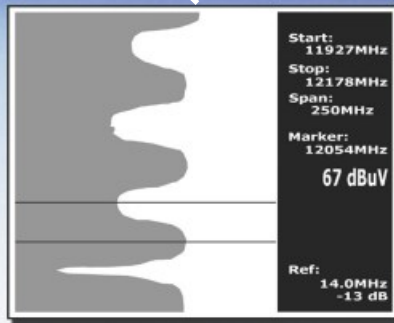

Expanded spectrum



QPSK constellation and BER

### SATLOOK Digital:

- Satellite-receiver 920-2150 Mhz.
- Spectrum-analyzer with expanded spectrum.
- Digital BER, QPSK and S/N-ratio.
- 4.5" B/W monitor for PAL/NTSC/SECAM.
- Tuneable sound 5.5 - 8.5 Mhz.
- LNB voltage 13/18v. 22 kHz tone switch.
- DiSEqC controll (1.0, 1.1, 1.2).
- KU- and C-band (normal/inverted video).
- Lots of memory-positions for spectrum pictures.
- Satellite identification.
- RS232 for PC-connection.
- Built in, rechargeable battery.
- Only 5 kg complete with carrying-case.

# SATLOOK DIGITAL

There are today a lot of different and interesting Tv-satellites. With the SATLOOK Digital-instrument it's easy to find, identify and maximize them all.

The SATLOOK Digital is a swedish made SAT-TV instrument and spectrum-analyzer. The unit is made for exact alignment and adjustment of satellite-dishes. It is intended for professional use when high accuracy and precise information are needed.

It's easily operated without a lot of unnecessary buttons and knobs. The basic functions are easy to get a hold on and takes only minutes to learn.

The instrument is provided with a 4.5" B/W-monitor which either shows normal SAT-TV-channel, the frequency spectrum 920-2150 MHz (or parts thereof) alt. Digital data. Menu/help-displays are shown on the LCD-screen (64x128) beside the monitor.

Analog SAT-TV channels can be tuned in and viewed upon (Multistandard Video PAL, NTSC and SECAM). Audiofrequencies between 5.5 - 8.5 MHz can be listened to.

The spectrum can be expanded (zoom in) for correct adjustment of the polarisation ("cross-polarisation"). The instrument has very high resolution and accuracy. It presents measured data  $\pm 2$  dB (at around 20 C).

SATLOOK Digital presents, under one of the sub menus, digital information like BER (bit error rate), constellation-diagram (QPSK) and S/N (signal/noise ratio).

SATLOOK Digital can handle a lot of memory-positions and both spectrum-pictures and certain frequencies can be saved (both analog and digital transponders).

The polarisation of the LNB is switchable 13V/18V and the Hi-Lo band with 22 kHz-tone. The DiSEqC-function controls all DiSEqC-accessories (like switches, LNB's and actuators).

The power of the instrument is supplied by a built in and rechargeable battery. Even though the instrument has a lot of functions it is still very light and flexible.

## Technical specification.

<b>Input frequency:</b>	920-2150MHz, easily reduced to 250 MHz (max zoom in).
<b>Frequency display:</b>	Yes, IF default. All standard LNB L.O. can be setup.
<b>Min level in:</b>	About 35 dBuV (noise).
<b>Max level in:</b>	About 90 dBuV.
<b>Attenuation:</b>	15 dB attenuator on/off.
<b>Display of signallevel: (analog)</b>	dB on LCD/monitor. Pitch-tone.
<b>Accuracy:</b>	$\pm 2$ dB (at +20 C)
<b>Display of signallevel: (Digital)</b>	S/N (signal/noise-ratio) BER (bit error rate) Constellation (QPSK)
<b>TV/Audio standard:</b>	Multi TV/Audio (PAL, NTSC, SECAM).
<b>KU- C-band:</b>	Yes, selectable.
<b>Audio bandwidth :</b>	Adjustable between 5.5 MHz and 8.5 MHz
<b>Input impedance:</b>	75 Ohm, BNC-con.
<b>Picture-screen:</b>	4.5"-monitor, B/W
<b>Menus:</b>	On LCD 64x128.
<b>Memory:</b>	100 spectrum pictures can be stored with name. Stored spectrum can be mixed for easy identification of satellite.-"Maxhold"-function.
<b>Favourite channels:</b>	Both analog and digital frequencies can be stored (with name). Simultaneous measuring of up to 10 channels at the same time. Each channel with individual setup of 13/18v and 22 kHz on/off.
<b>PC-connection:</b>	Yes, RS232-output
<b>Power out:</b>	Yes, 13-18V.
<b>22 kHz tone:</b>	Yes, on/off.
<b>DiSEqC:</b>	Yes, all 1.0 and 1.1. Also Toneburst on/off.
<b>DiSEqC actuator:</b>	Built in positioner for DiSEqC 1.2, SatScan and SatSelect.
<b>Battery:</b>	Rechargeable 12v, 3.5 amp/hour.
<b>Operational:</b>	About 1 hour on a fully charged battery.
<b>Weight:</b>	About 5 kg incl. battery.
<b>Accessories:</b>	Nylon carrying-case. Power-supply of 220v/13.5v, 1.7amp. Car-charger. BNC/F-adapter.

## EMITOR AB

Sjöviksbacken 14  
SE-117 43 Stockholm, Sweden  
Phone: +46 (0)8 775 00 01  
Fax: +46 (0)8 775 00 06  
[www.emitor.se](http://www.emitor.se)

Distributor: