

EZM0126NB Zero Bias Schottky Detector

SMA-M/BNC-F Negative Output Polarity

0.01 to 26.5 GHz




Technical Characteristics

Product Features

No Bias Required
Neg. (-) Polarity
Broadband Flat Frequency Response
Excellent VSWR

Max. Ratings

Storage Temperature:	-65° to +100°C
Operating Temperature:	-54° to +100°C
Maximum input power:	100mW CW




NOTES:
 Specifications @ +25°C & -20dBm input power

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	0.01 to 26.5	90	100	250	mV/mW open circuit
Voltage Sensitivity Stability over Temperature	0.01 to 26.5	2.5	3.0	3.5	dB
VSWR	0.01 to 18.0 18.0 to 26.5		1.50:1	1.60:1 2.2:1	
Flatness	0.01 to 18.0 18.0 to 26.5		+/-0.50 +/-1.00	+/-0.55 +/-1.15	dB dB
Polarity			Neg.(-)		
Video Capacitance		420	470	500	pF
Risetime & Falltime @ +10 dBm					
Dynamic Range	0.01 to 26.5	-30		+20	dBm
CW Power Handling				100	mW
Tss					
Operating Temperature		-54		+100	°C

NOTES:
 1. Standard polarity is negative. For positive polarity, add a 'P', ex. EZM0126NB
 2. Typical values are measured at +25°C and are not guaranteed

Outline Drawing

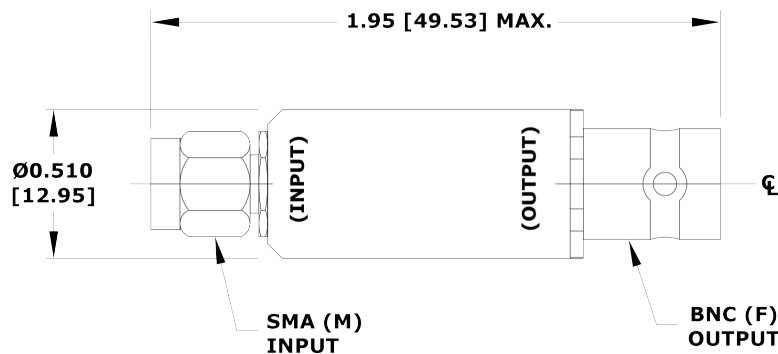

EZM0126NB Zero Bias Schottky Detector

SMA-M/BNC-F Negative Output Polarity

0.01 to 26.5 GHz



EZM Transfer Curve

