

# EZM2018PA3 Zero Bias Schottky Detector

SMA-F/SMA-M Positive Output Polarity

2.0 to 18.0 GHz



NOTES:  
Specifications @ +25°C & -20dBm input power

## Technical Characteristics

### Product Features

No Bias Required
Pos. (+) Polarity
Broadband Flat Frequency Response
Excellent VSWR

### Max. Ratings

Storage Temperature:	-45° to +100°C
Operating Temperature:	-25° to +80°C
Maximum input power:	100mW CW


## Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	2.0 to 18.0	450	500	600	mV/mW open circuit
Voltage Sensitivity Stability over Temperature	2.0 to 18.0	2.5	3.0	3.5	dB
VSWR	2.0 to 18.0		1.50:1	1.60:1	
Flatness	2.0 to 18.0		+/-0.30	+/-0.40	dB
Polarity			Pos. (+)		
Video Capacitance			20		pF
Risetime & Falltime @ +10 dBm					
Dynamic Range	2.0 to 18.0	-30		+20	dBm
CW Power Handling				100	mW
Tss				2.0 to 18.0	
Operating Temperature		-25		+80	°C

### NOTES:

- Standard polarity is negative. For positive polarity, add a 'P', ex. EZM2018PA3P
- Typical values are measured at +25°C and are not guaranteed

## Outline Drawing

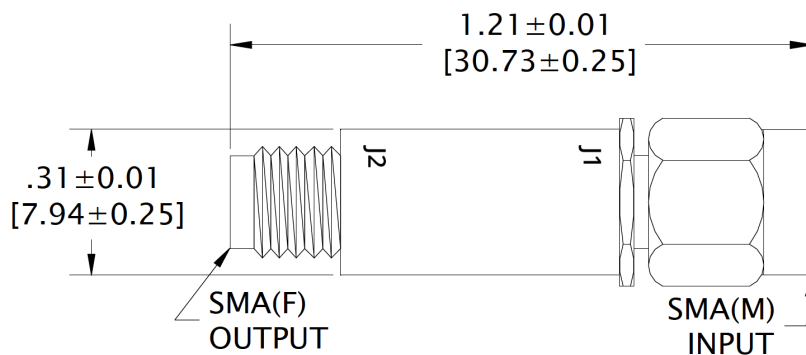

# EZM2018PA3 Zero Bias Schottky Detector

SMA-F/SMA-M Positive Output Polarity

2.0 to 18.0 GHz



## EZM Transfer Curve

