

D Montageanleitung

Modul VGA 4 Bestellnummer GAF9200

für TV-Chassis Digi 100

bestehend aus:	Baustein PIP / VGA	29504 206 2100
	Verriegelungsschrauben	29303 599 0300
	Montageanleitung	72010 029 5000

Achtung: MOS-Vorschriften beachten 

Montage:

- Netzstecker ziehen.
- Befestigungsschrauben der Gehäuserückwand herauserschrauben, Rückwand nach hinten ziehen und abnehmen.
- Linke und rechte Arretierungsschraube des Chassis herauserschrauben und Chassis nach hinten ziehen.
- Bei Bedarf Steckverbindungen abziehen.
- Haltebügel für Bausteine lösen.
- Abdeckung **C** für Flashprogrammierung (Service-Schnittstelle) abziehen.
- Abdeckung abnehmen:
Schrauben **A** herauserschrauben, Rastnasen **B** austrasten (optional: Koaxkabel von Tuner des Signal-Bausteins abziehen) und Abdeckung nach hinten wegnehmen.
- Feature-Baustein herausziehen (2 Rastnasen der Steckerleiste zusammendrücken und Baustein herausziehen).
- Baustein PIP / VGA in Feature Baustein einsetzen,
- Chassis-Masseleitung (Flachstecker) vom Signal-Baustein abziehen und Masseleitung des Bausteins PIP / VGA mit Flachsteckerverteiler auf Signal-Baustein stecken.
- Chassis-Masseleitung auf freien Steckkontakt des Flachsteckerverteilers stecken.
- Feature-Baustein wieder einsetzen.
- Haltebügel für Bausteine einrasten (auf Kabelverlegung achten).
- Durchbrüche **D** für Kopfhörerbuchse und VGA-Buchse aus Abdeckung ausbrechen.
- Koaxkabel auf Tuner des Signal-Bausteins stecken (optional).
- Abdeckung aufsetzen und einrasten.
- Schrauben **A** einschrauben.
- 2 Verriegelungsschrauben **E** einschrauben.
- Abdeckung **C** für Flashprogrammierung (Service-Schnittstelle) aufstecken.
- Steckverbindungen (wenn abgezogen) wieder anstecken.
- Chassis einschieben und mit linker und rechter Arretierungsschraube festschrauben.
- Gehäuserückwand aufsetzen.
- Gerät schließen.


Netzstecker einstecken und Gerät einschalten.

VGA-Geometrieabgleich

Computer an VGA-Buchse anschließen und einschalten.

TV-Gerät in VGA-Betrieb schalten (AV5).

Über "EASY DIALOG" -> "Installation" -> "Servicemenü für Händler" -> "8500" -> "Bildgeometrie" aufrufen und den VGA-Geometrieabgleich durchführen.

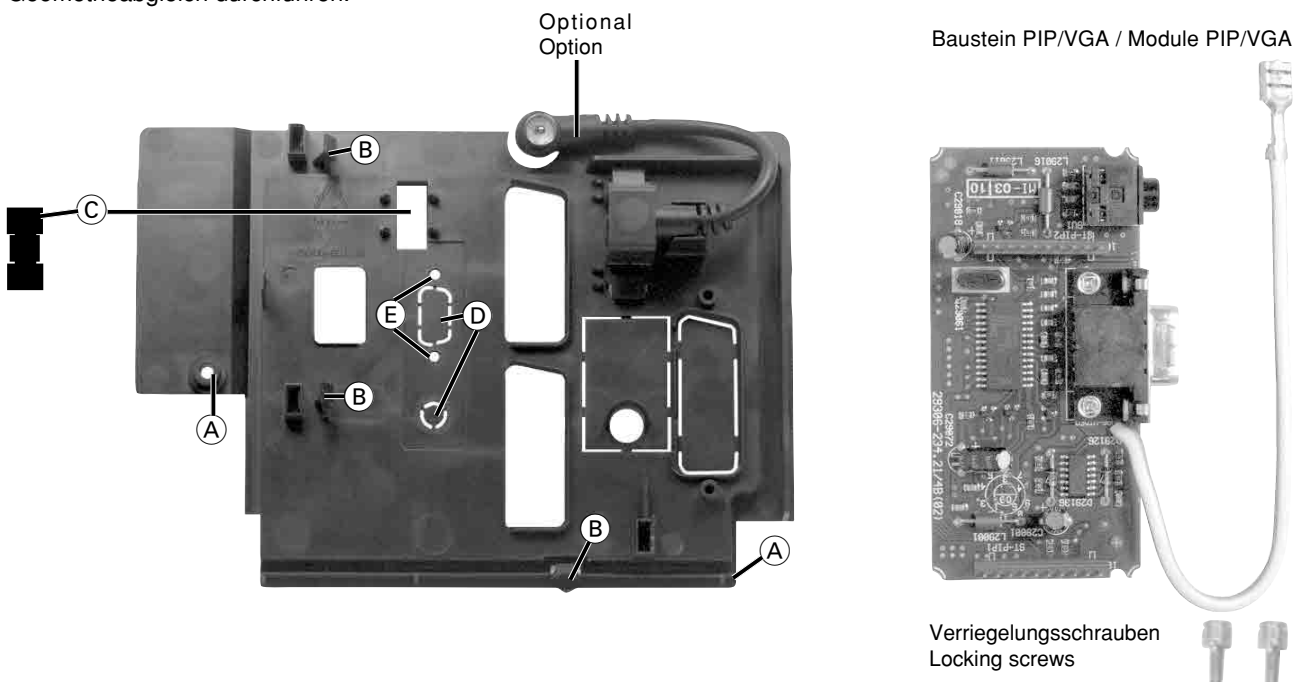

GB Montageanleitung

Modul VGA 4 Order No. GAF9200

for TV chassis Digi 100

bestehend aus:	PIP / VGA module	29504 206 2100
	Locking screws	29303 599 0300
	Operating instructions	72010 029 5000

Attention: Observe the MOS regulations 

Fitting:

- Pull off the power supply plug.
- Undo the fixing screws of the rear panel, pull back and remove the rear panel.
- Undo the left and right locking screws of the chassis and pull the chassis back.
- Pull off the connectors if necessary.
- Disengage the module holding bracket.
- Pull off the cover (C) for flash programming (service interface).
- Removing the cover:
 - Undo the screws (A), disengage the locking lugs (B) (option: pull off the coaxial cable of the tuner of the signal module) and remove the cover in backward direction.
- Pull out the feature module (press together the 2 locking lugs of the strip connector and pull out the module).
- Insert the PIP / VGA module into the feature module.
- Pull off the earth lead (flat plug) of the signal module and plug the earth lead of the PIP / VGA module with the flat distribution plug on the signal module.
- Plug the chassis earth lead on a free pin of the flat distribution plug.
- Refit the feature module.
- Lock in the module holding bracket (observe cable laying).
- Break the openings (D) for the headphone socket and the VGA socket out of the cover.
- Plug the coaxial cable on the tuner of the signal module (optional).
- Fit the cover and lock it in place.
- Screw in the screws (A).
- Screw in the 2 locking screws (E).
- Fit the cover (C) for flash programming (service interface).
- Refit the plug connectors (when pulled off).
- Slide the chassis in place and fix it with the left and right locking screws.
- Refit the rear panel.
- Close the unit.


Reconnect the power supply plug and switch the unit on.

VGA geometry alignment

Connect a PC to the VGA socket and call up the test pattern of the PC for the alignment.


Switch the unit to VGA mode (AV5).

Select "EASY DIALOG" -> "Installation" -> "Service menu for dealer" -> "8500" -> "Picture geometry", then carry out the VGA geometry alignment.

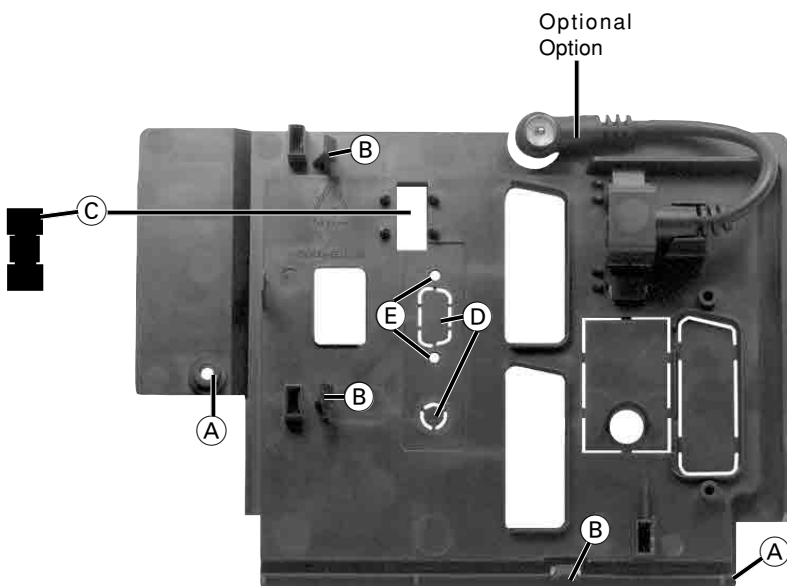

Optional
Option

Baustein PIP/VGA / Module PIP/VGA

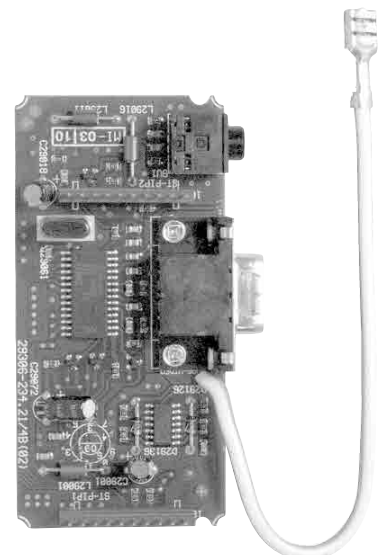

Verriegelungsschrauben
Locking screws

