

EZR2080A3 Zero Bias Schottky Detector

SMA-F/SMA-M Negative Output Polarity

2.0 to 8.0 GHz



NOTES:
Specifications @ +25°C & -20dBm input power

Technical Characteristics

Product Features

High Voltage Output Sensitivity
No bias required
Neg. (-) Polarity
Broadband Flat Frequency Response

Max. Ratings

Storage Temperature:	-65° to +150°C
Operating Temperature:	0° to +90°C
Maximum input power:	100mW CW


Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	2.0 to 8.0	1000	1200		mV/mW open circuit
Voltage Sensitivity Stability over Temperature					
VSWR	2.0 to 8.0		4.5:1		
Flatness	2.0 to 8.0			+/-1.0	dB
Polarity			Neg.(-)		
Video Capacitance				20	pF
Risetime & Falltime @ +10 dBm					
Dynamic Range					
CW Power Handling				100	mW
Tss					
Operating Temperature		0		+90	°C

NOTES:

- Standard polarity is negative. For positive polarity, add a 'P', ex. EZR2080PA3
- Typical values are measured at +25°C and are not guaranteed

Outline Drawing

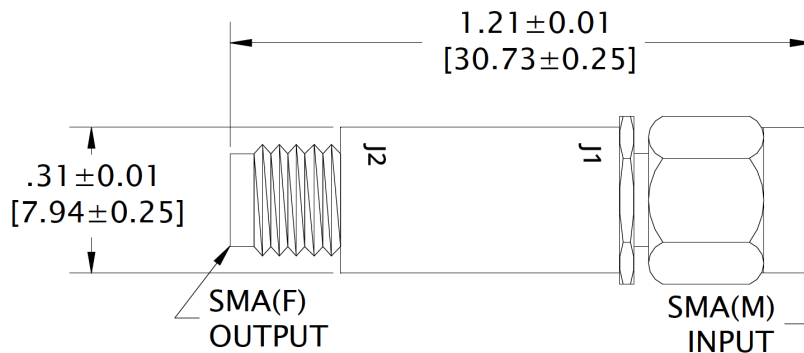

EZR2080A3 Zero Bias Schottky Detector

SMA-F/SMA-M Negative Output Polarity

2.0 to 8.0 GHz



EZR Transfer Curve

