

IQ3060MP2 IQ Mixer

3.0 to 6.0 GHz operation



Features
Broadband Frequency Operation
Excellent Conversion Loss
High port-to-port isolation
Frequency Converter Applications

Maximum Ratings	
Operating Temperature	-55 to +125°C
Storage Temperature	-65 to +150°C
Peak I/P Power For Any Port	+23 dBm Peak
Peak I/P Power For All Ports	+26 dBm Peak
Peak I/P Current @ +25°C	100mA


Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0000

Parameters	Freq. (GHz)	Minimum (dB)	Typical (dB)	Maximum (dB)	Units	Conditions
Conversion Loss						
RF Input	3.0 to 6.0		6.5	8.5	dB	IF=70 MHz
LO Input	2.0 to 4.0					
IF Output	DC-0.5					
VSWR	LO&IF RF			2.5:1		
Isolation						
L-R Isolation		25.0	30.0		dB	
L-IQ Isolation		20.0	28.0		dB	
RF-I/Q			30.0		dB	
Spurious (In-band) 4IF						
Input IP3						
1dB Compression Point			+1.0		dBm	
LO Drive			+10.0	+14.0	dBm	
Image Rejection		20.0	28.0		dB	
Amplitude Match						
Phase Match			2.5		°	

NOTES:

1. Typical values are measured at +25°C and are not guaranteed.

Package Outline: P2

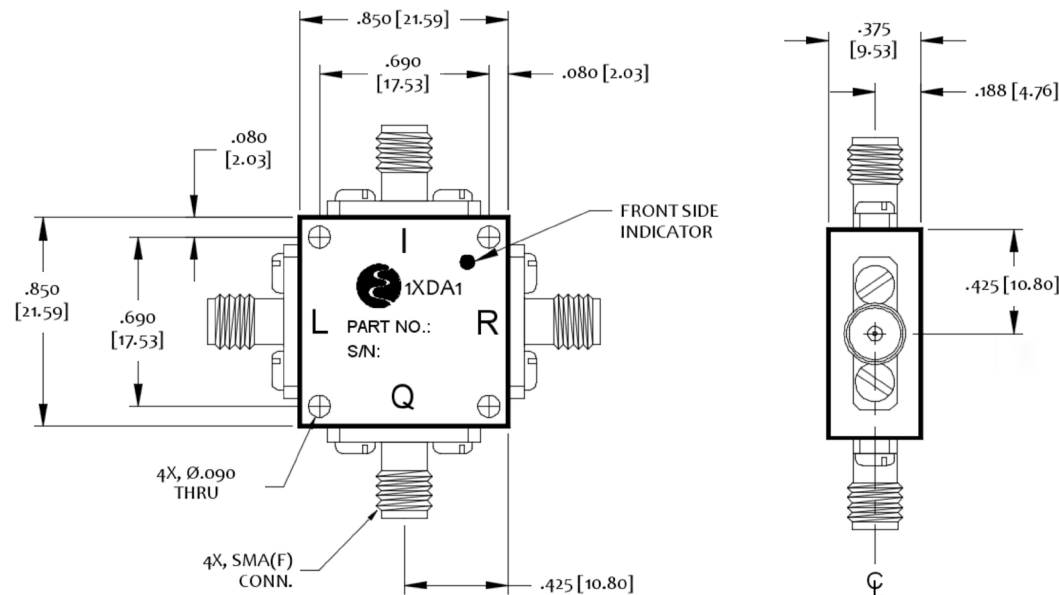

DISCLAIMER: Subject to change without notice. Rev(-) 09/5/19 1