

# IQ8010MP2-154 IQ Mixer

8.0 to 10.0 GHz operation



Features
Broadband Frequency Operation
Excellent Conversion Loss
High port-to-port isolation
Frequency Converter Applications

Maximum Ratings	
Operating Temperature	-55 to +125°C
Storage Temperature	-65 to +150°C
Peak I/P Power For Any Port	+23 dBm Peak
Peak I/P Power For All Ports	+26 dBm Peak
Peak I/P Current @ +25°C	100mA


Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0000

Parameters	Freq. (GHz)	Minimum (dB)	Typical (dB)	Maximum (dB)	Units	Conditions
<b>Conversion Loss</b>						
RF Input	8.0 to 10.0		5.0	7.5	dB	
LO Input	8.0 to 10.0					
IF Output	DC-0.5					
VSWR	LO&IF RF			2.0:1		
<b>Isolation</b>						
L-R Isolation		25.0	30.0		dB	
L-IQ Isolation		25.0	35.0		dB	
RF-I/Q						
Spurious (In-band) 4IF						
Input IP3						
1dB Compression Point			+4.0		dBm	
LO Drive				+11.0	dBm	
Image Rejection		14.0	20.0		dB	
Amplitude Match			0.3		dB	
Phase Match			5.0		°	

**NOTES:**

1. Typical values are measured at +25°C and are not guaranteed.

Package Outline: P2

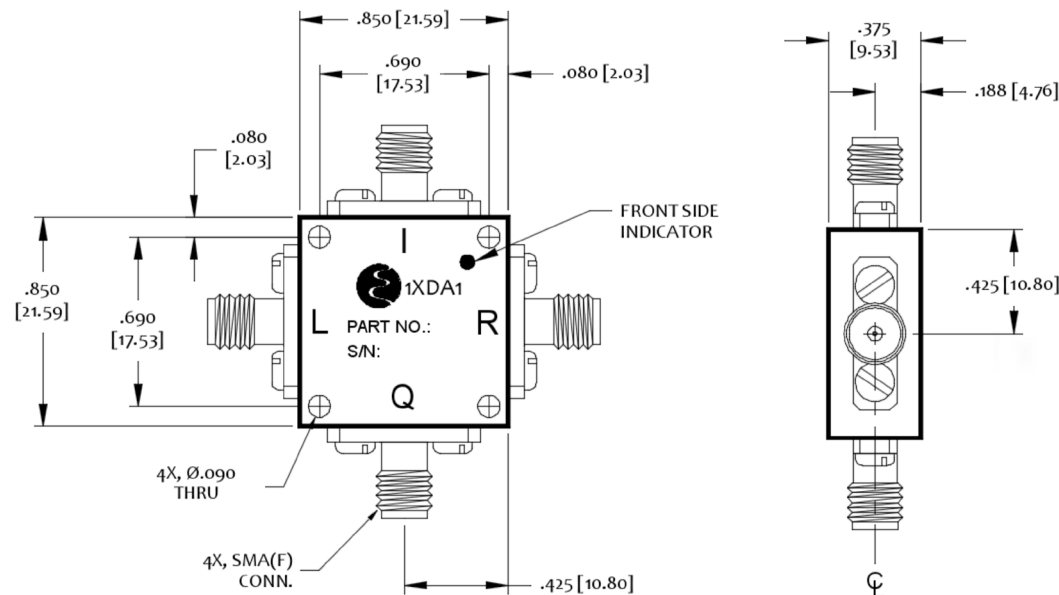

DISCLAIMER: Subject to change without notice. Rev(-) 09/5/19

Quality products that serve the industry. Today and tomorrow.

Copyright© EclipseMDI

www.eclipseMDI.com

1.408.526.1100

EclipseMDI

sales@eclipsemdi.com