

TH8016T1 Threshold Detector

8.0-16.0 GHz Octave/Narrow Band



Technical Characteristics



Product Features
High reliability hermetically sealed
10 dB dynamic range: -20 dBm to -10dBm
Propagation delay: 10 nS typical
TTL logic output
Minimum pulse width: 50 nS typical
Temperature stability: 1.0 dB Typ., 3 dB above threshold setting
Threshold setting internally fixed or external voltage
DC power (no load): ± 5 VDC @ 100mA max.

Max. Ratings	
Storage Temperature:	-65°C to +125°C
Operating Temperature:	-55°C to +90°C
Maximum input power:	+25dBm Peak, +20dBm CW

Product Export Classification

ECCN: EAR99 (Unless otherwise specified)
HTS: 8542330000


Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Frequency Range	8.0 to 16.0				GHz
Threshold Variation			0.7		+/- dB
VSWR			3.0:1		

NOTES:

1. Response time for input change > 3dB above CW threshold. R(load)=1M Ω , C(load)=100pF

Outline Drawing

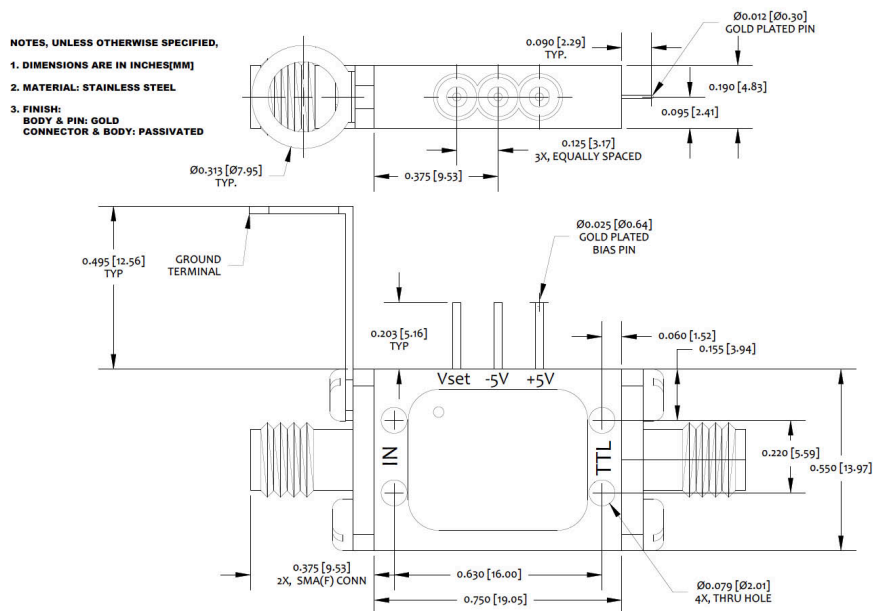


TH8016T1 Threshold Detector

8.0-16.0 GHz Octave/Narrow Band



Typical Regulated Vset Curve @ +25°C

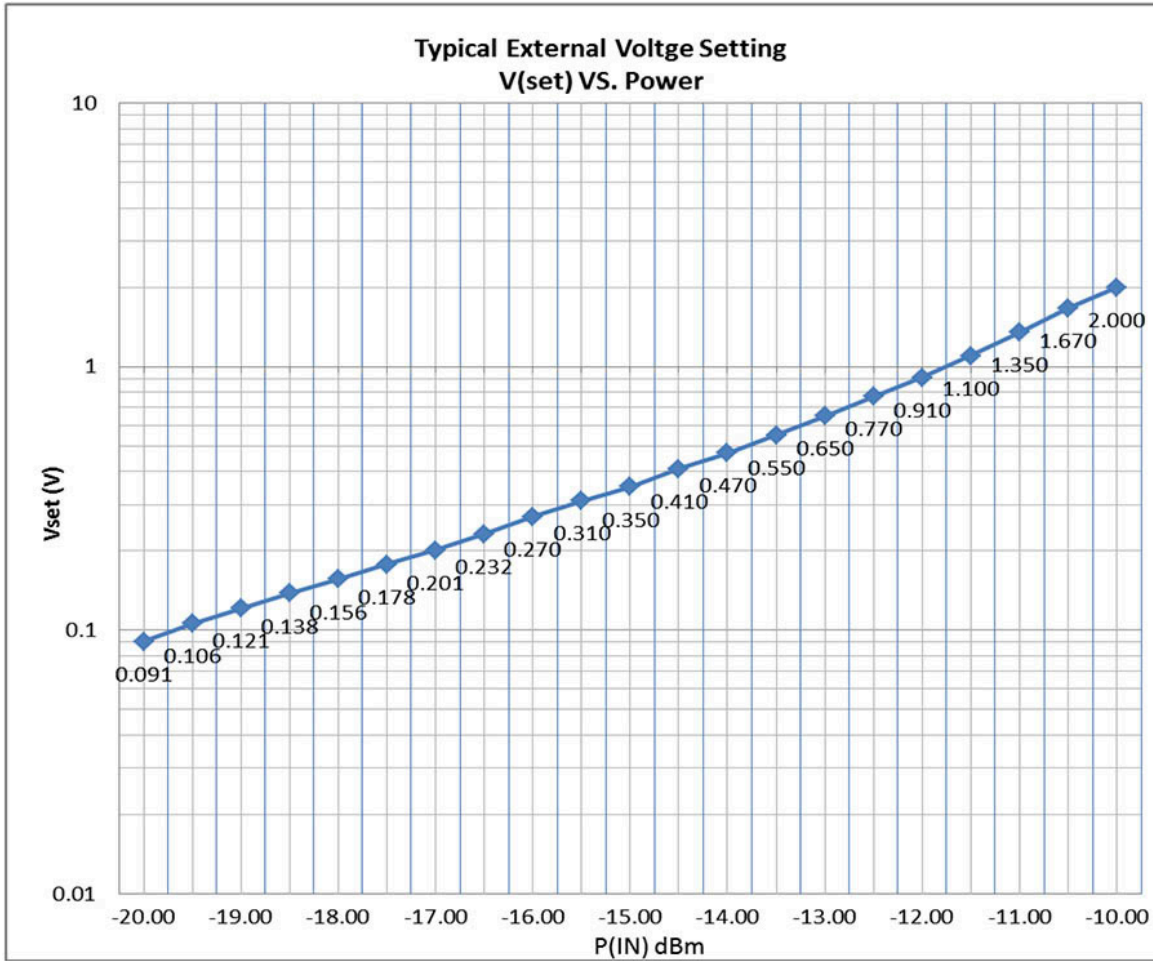

DISCLAIMER: Subject to change without notice. Rev(A) 01/16/20